

FHWA TEXAS DIVISION	PROJECT NO.		SHEET NO.
	MMC 6378-30-001		1
STATE	DISTRICT	COUNTY	
TEXAS	LFK	ANGELINA	
CONTROL	SECTION	JOB	HIGHWAY NO.
6378	30	001	FM 324, ETC.

INDEX OF SHEETS

<u>SHEET NO.</u>	<u>DESCRIPTION GENERAL</u>
1	TITLE SHEET
2	SITE MAP
3,3A-3C	GENERAL NOTES
4	QUANTITY SHEET
5	QUANTITY SUMMARIES

**STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION**

**PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT
TYPE OF WORK:**

**MATERIAL ONLY: HMA (TYPE D) AND SUPERPAVE MIXTURE
MMC 6378-30-001
FM 324, ETC.**

ANGELINA COUNTY MAINTENANCE SECTION
(PICK UP AT PLANT AND DELIVERY TO SITES)

SEE SHEET #2 FOR LOCATION MAP



RECOMMENDED FOR LETTING:

DocuSigned by:
Jeremy King, P.E.

DISTRICT MAINTENANCE ENGINEER

3/8/2021

DATE

APPROVED FOR LETTING:


DocuSigned by:
[Signature]

DIRECTOR OF OPERATIONS

3/8/2021


DATE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

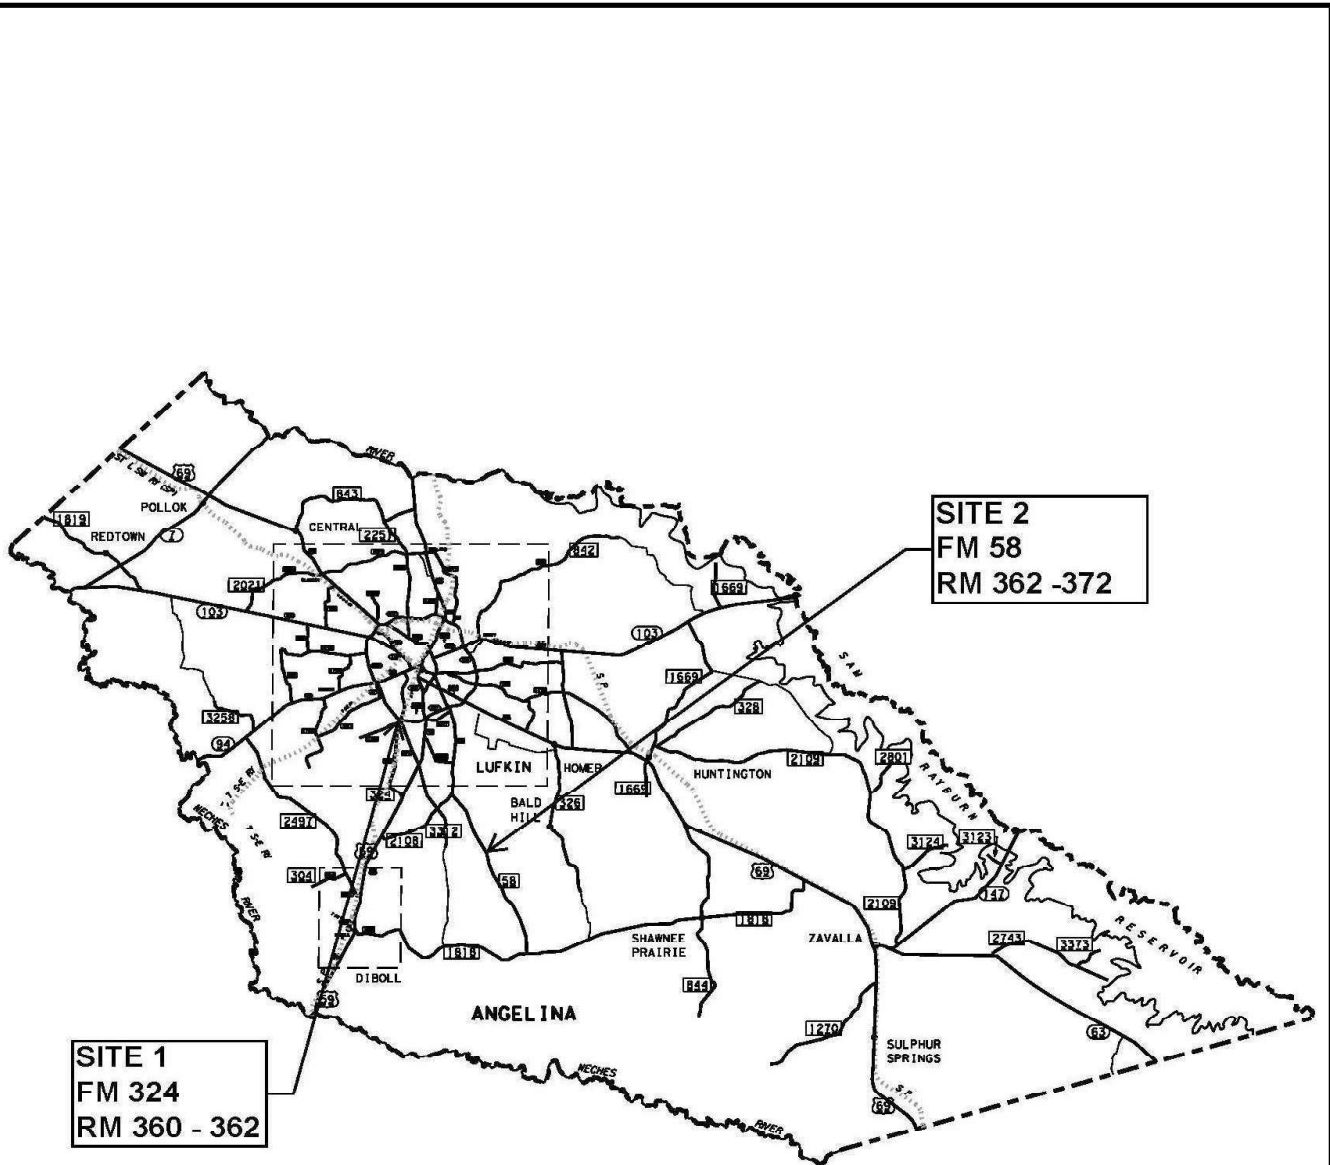

SITE 1
FM 324
RM 360 - 362

SITE 2
FM 58
RM 362 - 372

SITE MAP			
©2021 			
CONT	SECT	JOB	HIGHWAY
6378	30	001	FM 324, ETC.
DIST	COUNTY		SHEET NO.
LFK	ANGELINA		2

Project Number: MMC 6378-30-001**Control: 6378-30-001****County: Angelina****Highway: FM 324, ETC.****GENERAL NOTES:**

PROJECT DESCRIPTION: Provide Superpave Mixture Type C (material only) at the plant for pickup to use on state-maintained roadways within the Angelina County Maintenance Section. Deliver Hot Mix Asphalt, Type D (material only) to specified state-maintained roadways in the Angelina County Maintenance Section.

Jeremy King Jeremy.King@txdot.gov
 Tammy Gibson Tamara.Gibson@txdot.gov

Contractor questions will only be accepted through email to the above individual(s). All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<http://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

TXDOT PROJECT SUPERVISORS: All work on this contract will be scheduled and directed by the Maintenance Section Supervisor listed below. Payment will be made monthly for work completed and accepted according to specifications. All payment requests should be directed to the following Maintenance Section Supervisor listed below.

<u>COUNTY</u>	<u>SUPERVISOR</u>	<u>ADDRESS</u>	<u>CONTACT #</u>
Angelina	Josh Bobbitt	1410 Kurth Drive Lufkin, TX 75901	(936) 634-3414

CONTRACT PROSECUTION: Each contract awarded by the Department stands on its own and, as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

ITEM 2: INSTRUCTIONS TO BIDDERS

View plans on-line or download from the web at:

http://www.txdot.gov/business/contractors_consultants/plans_online.htm

Project Number: MMC 6378-30-001**Control: 6378-30-001****County: Angelina****Highway: FM 324, ETC.**

Order plans from any of the plan reproduction companies shown on the web at:

<http://www.txdot.gov/business/letting-bids/repro-companies.html>

Bid items on this contract are listed to establish a unit price for each item. Certain items listed in the proposal may not be used if it is determined by the Engineer that the work will not be required. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

ITEM 4: SCOPE OF WORK

The contract may be extended twice if in the judgment of the Engineer, the contractor has satisfactorily fulfilled the terms and conditions of the contract. The extension must be agreed upon in writing by both parties to the contract and may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract or any mutually agreed modifications to the said terms and conditions by one or more cumulative change orders. The Engineer will set a deadline for completing the agreements. This deadline will be based in the time needed to re-let and award a new contract if no extension is agreed upon.

ITEM 8: PROSECUTION AND PROGRESS

Contract Time - The number of calendar days for this project shall be 120 days or until contract funds are expended.

Time charges will be in accordance with Article 8.3.1.5 "Calendar Day".

Per Special Provision 000-658, Schedule of Liquidated Damages, charges could occur if requested materials are not ready for pick-up and/or delivery with a 24 hours' notice. Notify the Angelina County Maintenance Supervisor when encountering any unforeseen delays.

ITEM 500: MOBILIZATION

Mobilization does not apply to this materials contract.

ITEM 8004: DENSE-GRADED HOT-MIX ASPHALT (SMALL QUANTITY) (MATERIALS ONLY)

No RAS will be allowed. Use aggregate that meets the SAC requirement of Class B. Use a Texas Gyrotory Compactor (TGC) or a Superpave Gyrotory Compactor (SGC) to design the mixture.

Use of a substitute PG binder one grade below the PG binder specified will be allowed as long as the material meets the originally specified binders Hamburg requirements. The above criteria must continue to be met during production, and additional tests will be performed at a frequency

Project Number: MMC 6378-30-001**Control: 6378-30-001****County: Angelina****Highway: FM 324, ETC.**

determined by the engineer. Binder substitution is limited to a reduction in one high temperature grade. The limitation does not apply to low temperature grade. Binder substitution is allowed when aged recycled binder is used.

Add hydrated lime to all HMA mixtures at a minimum rate of 1.0% by weight of the total aggregate, except for those mixtures containing RAP. Mixtures that contain RAP and/or RAS shall be designed at a rate of minimum 0.5% of lime by weight and the test results will be evaluated by the engineer to determine if lime or a liquid anti-strip additive will be used. The hydrated lime shall meet the requirements of DMS-6350, "Lime and Lime Slurry". The hydrated lime shall be added in accordance with the construction method in Item 301, "Asphalt Antistripping Agents, unless otherwise approved. This lime will be subsidiary to this item.

ITEM 8006. SUPERPAVE MIXURES (MATERIALS ONLY)

No Department-owned RAP is available.

Use aggregate that meets the SAC requirements of Class A. TX-203 will be ran on the complete mix and a requires minimum of 45%.

Use of a substitute PG binder one grade below the PG binder specified will be allowed as long as the material meets the originally specified binders Hamburg requirements. The above criteria must continue to be met during production, and additional tests will be performed at a frequency determined by the engineer. Binder substitution is limited to a reduction in one high temperature grade. The limitation does not apply to low temperature grade. Binder substitution is allowed when aged recycled binder is used.

Add hydrated lime to all HMA mixtures at a minimum rate of 1.0% by weight of the total aggregate, except for those mixtures containing RAP and/or RAS. Mixtures that contain RAP and/or RAS shall be designed at a minimum rate of 0.5 % of lime by weight and the test results will be evaluated by the engineer to determine if lime or a liquid anti-strip additive will be used. The hydrated lime shall meet the requirements of DMS-6350, "Lime and Lime Slurry". The hydrated lime shall be added in accordance with the construction method in Item 301, "Asphalt Antistripping Agents". This lime will be subsidiary to this item.

Trial batches may be required whenever the design has not been produced in the previous 12 months. Trial batches will be subsidiary to the bid item.

On Table 1, under 3077.2.1.3, the Sand equivalent, %, Min is void and not replaced. The minimum percent for the sand equivalent shall be 45 for the combined aggregate.

The Plant is the designated aggregate sampling location, unless otherwise approved by the Engineer.

This contract is for small quantities only. The contractor shall be able to provide agreed upon amounts as needed. Contact the Angelina County Maintenance Supervisor at least 1 hour prior to delivery.

Project Number: MMC 6378-30-001

Control: 6378-30-001

County: Angelina

Highway: FM 324, ETC.

The Contractor's driver shall report to the Angelina County Maintenance Supervisor or their representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time of delivery and departure.

The site locations for deliveries are as follows:

- Site 1 = FM 324 (RM 360 -362)
500 Tons Needed
Minimum – 250 Tons Per Day (May Vary)
- Site 2 = FM 58 (RM 362 - 372)
500 Tons Needed
Minimum – 250 Tons Per Day (May Vary)

For Hauling Operations

- Roadway delivery times will be scheduled by the Angelina County Maintenance Supervisor.
- Plant will be no further than (50) miles from the Angelina County Maintenance Section.

For Pick Up Operations:

- Contractor will have material ready for pick-up on the mutually agreed upon day and time.
- Contractor pick-up site will be no further than fifty (50) miles from the Angelina County Maintenance Yard.
- A minimum of 500 tons of Superpave will be picked up each time. It is estimated that there will be between 6 – 8 pick-ups.



QUANTITY SHEET

COUNTY Angelina

CONTROLLING PROJECT ID 6378-30-001

DISTRICT Lufkin
HIGHWAY SLO287

CONTROL SECTION JOB		6378-30-001		TOTAL EST.	TOTAL FINAL
PROJECT ID	A00140383	Angelina			
COUNTY	Angelina	SLO287			
HIGHWAY	SLO287	UNIT	EST.	FINAL	
8006-6016	SP TY C PG 76-22 (PICKUP)	TON	3,000.000		3,000.000
8011-6002	D-GR HMA(SQ) TY D PG 64-22 (DELIVERY)	TON	500.000		500.000
8011-6018	D-GR HMA(SQ) TY D PG 64-22 (DELIVERY)	TON	500.000		500.000




Report Generated By: txdotconnect_internal_ext

Report Created On: Mar 1, 2021 10:54:20 AM

DISTRICT	COUNTY	CCSJ	SHEET
Lufkin	Angelina	6378-30-001	

SUMMARY OF MATERIALS ITEMS

ITEM NO.		8006	8011
COUNTY	HIGHWAY NO.	SP TY C PG 76-22 (PICKUP) (MATERIAL ONLY)	D-GR HMA TY D PG 64-28 (DLVR) (MATERIAL ONLY)
		TON	TON
		TYPE C (PICKED UP)	TYPE D (DELIVERED)
ANGELINA	N/A	3,000	
ANGELINA	FM 324 (RM 360- 362) (SITE 1) (8011 6002)		500
ANGELINA	FM 58 (RM 362 - 372) (SITE 2) (8011 6018)		500
PROJECT TOTALS		3,000	1,000

QUANTITY SUMMARIES			
©2021  Texas Department of Transportation®			
CONT	SECT	JOB	HIGHWAY
6378	30	001	FM 324, ETC
DIST	COUNTY		SHEET NO.
LFK	ANGELINA		4