

STATE OF TEXAS  
TEXAS DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT


PROJECT NO: MMC 6379-06-001

COUNTY: SAN PATRICIO, ETC.

ROADWAY: SH0188

LIMITS: \*

FOR PURCHASE & DELIVERY OF MATERIALS ONLY:  
FLEXBASE\*

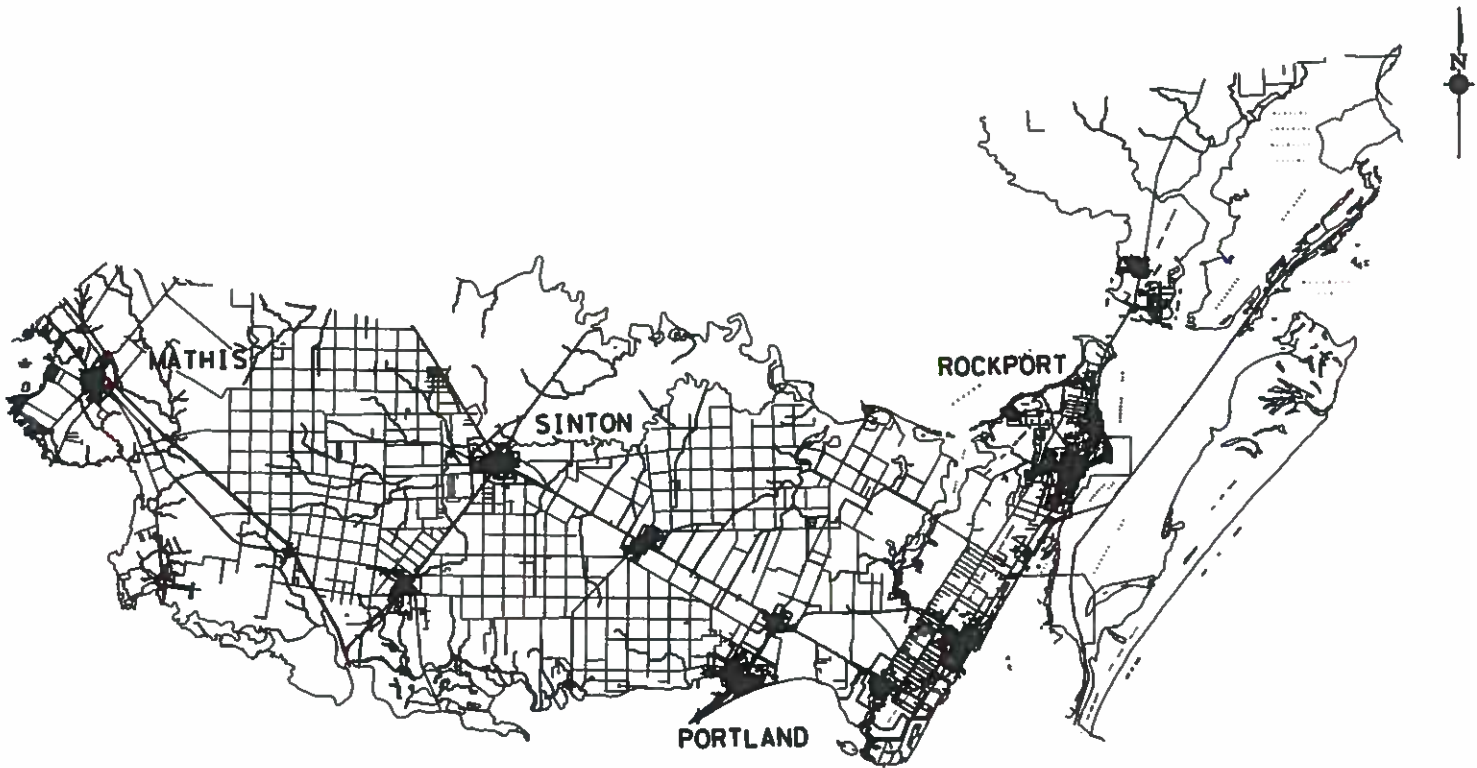


\*SINTON MAINTENANCE OFFICE AREA OF RESPONSIBILITY  
\*ROCKPORT MAINTENANCE OFFICE AREA OF RESPONSIBILITY

INDEX OF SHEETS

1	TITLE SHEET
2-5	GENERAL NOTES
6	ESTIMATE & QUANTITY SHEET
7	PLAN SHEET & SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT



© 2021

TEXAS DEPARTMENT OF TRANSPORTATION

SUBMITTED FOR LETTING: 3-9 2021

*Armando Boyer, P.E.*  
BRIDGE ENGINEER

APPROVED FOR LETTING: 3/9 2021

*James J. Harris, P.E.*  
DIRECTOR OF MAINTENANCE

**County:** San Patricio, etc.

**Control:** 6379-06-001

**Roadway:** SH0188

**General Notes**

This contract shall commence upon the issuance of a work order by the Director of Maintenance or his representative and shall continue for 120 Calendar days. This project consists of described word defined with item 8007 “Flexible Base (Materials Only)”, the 2014 Texas Standard Specifications, General Notes and Plans.

This project includes plan sheets that are not part of the bid proposal. Plans can be viewed online or downloaded from the web at:

<http://www.txdot.gov/business/letting-bids/plans-online.html>

Order plans from any of the plan reproduction companies shown on the web at:

[http://www.dot.state.tx.us/business/contractors\\_consultants/repro\\_companies.htm](http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm)

Information concerning the project, plans, limits and locations may also be obtained by contacting the Director of Maintenance James Harris, P.E. or the Supervisor in charge of this project.

All Contractor pre-bid questions on this project are to be submitted by email to the following individual(s):

Director of Maintenance	James D. Harris, P.E.	<a href="mailto:James.Harris1@txdot.gov">James.Harris1@txdot.gov</a>
Area Engineer Sinton Area Office	Robert Isassi, P.E.	<a href="mailto:Robert.Isassi@txdot.gov">Robert.Isassi@txdot.gov</a>
Assistant Area Engineer Sinton Area Office	Eric Martinez Jr., P.E.	<a href="mailto:Eric.Martinez@txdot.gov">Eric.Martinez@txdot.gov</a>

Contractor questions will only be accepted through email to the above individuals. All contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All pre-bid questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

**County:** San Patricio, etc.

**Control:** 6379-06-001

**Roadway:** SH0188

Prior to beginning operations, a meeting will be held at the District Headquarters that should include material supplier and maintenance section supervisors within the contract area.

If several contracts are awarded to the same contractor, the contractor shall be sufficiently equipped to concurrently supply each contract material.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts.

**General Requirements and Covenants - Items 1 thru 9**

**Project Description** - This project shall consist of the purchase and delivery of Flexible Base materials from the supplier’s stockpile to the Maintenance Section’s designated locations specified. See estimate and quantity sheet for type and quantity of materials.

<b>Area Engineer</b>	<b>Address</b>	<b>Contact Person</b>
Robert Isassi, P.E.	11571 US 181 Sinton, TX 78387	<a href="mailto:Robert.Isassi@txdot.gov">Robert.Isassi@txdot.gov</a>

<b>Maintenance Section</b>	<b>Address</b>	<b>Maintenance Supervisor</b>
Sinton	11571 US 181 Sinton, TX 78387	Jeremiah Boehme <a href="mailto:Jeremiah.Boehme@txdot.gov">Jeremiah.Boehme@txdot.gov</a>
Rockport	1401 FM 3036 Rockport, TX 78382	John Jacobs <a href="mailto:John.Jacobs@txdot.gov">John.Jacobs@txdot.gov</a>

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered.

The contractor is responsible for furnishing and delivering the flex base to the agreed upon location(s). The delivery hours will be Monday through Friday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

**County:** San Patricio, etc.

**Control:** 6379-06-001

**Roadway:** SH0188

Various bid items and their associated quantities have been provided within this Contract in order to establish bid prices for the proposed work. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

### **ITEM 2 – Instruction to Bidders**

By signing this proposal, a bidder acknowledges that he/she has a copy of the "Standard Specifications for Construction of Highways, Streets and Bridges", adopted by the Texas Department of Transportation, November 1, 2014. This specification book may be purchased from the Department.

### **ITEM 3 - Award and Execution of Contract**

Material requests shall be issued by Work Order to the Contractor a minimum of 24 hours in advance. Each Work Order shall specify quantities to be delivered, location of delivery, and days to complete Work Order. A minimum of 250 Tons per work order will be required for delivery only.

### **ITEM 4 - Scope of Work**

This contract may be extended per Special Provision 004-004.

### **ITEM 6 – Control of Materials**

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website:

<https://www.txdot.gov/business/resources/producer-list.html>

### **ITEM 8 – Prosecution and Progress**

Working Days shall be computed and charged in accordance with Article 8.3.1.5 "Calendar Day."

Individual Work Order charge days shall run concurrently with Contract time charges.

**County:** San Patricio, etc.

**Control:** 6379-06-001

**Roadway:** SH0188

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages shall be charged each day for failure to meet each work order. This will include:

1. Failure to produce at the starting date or continually progress on the work order.
2. Failure to produce the required number of tons per day.

The amount assessed per day for liquidated damages shall be 3 % of the estimated cost of the work order not to exceed \$600 per day.

**ITEM 9 – Measurement and Payment**

In accordance with Article 9.2 "Plans Quantity Measurement," plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for delivery. Maintenance Sections may request quantities varying from those shown in the plans to meet their needs.

**ITEM 8007 – Flex Base (Materials Only)**


For Table 1, "Material Requirements" a minimum plasticity index (PI) of 4 is required for Ty A Gr 1-2 Flex Base.

Deliver to the location in belly dumps unless otherwise directed by the Maintenance Supervisor.

FL BS (SITE DEL)(TY A GR 1-2)(SITE 1): Sinton Maintenance Office


FL BS (SITE DEL)(TY A GR 1-2)(SITE 2): Rockport Maintenance Office



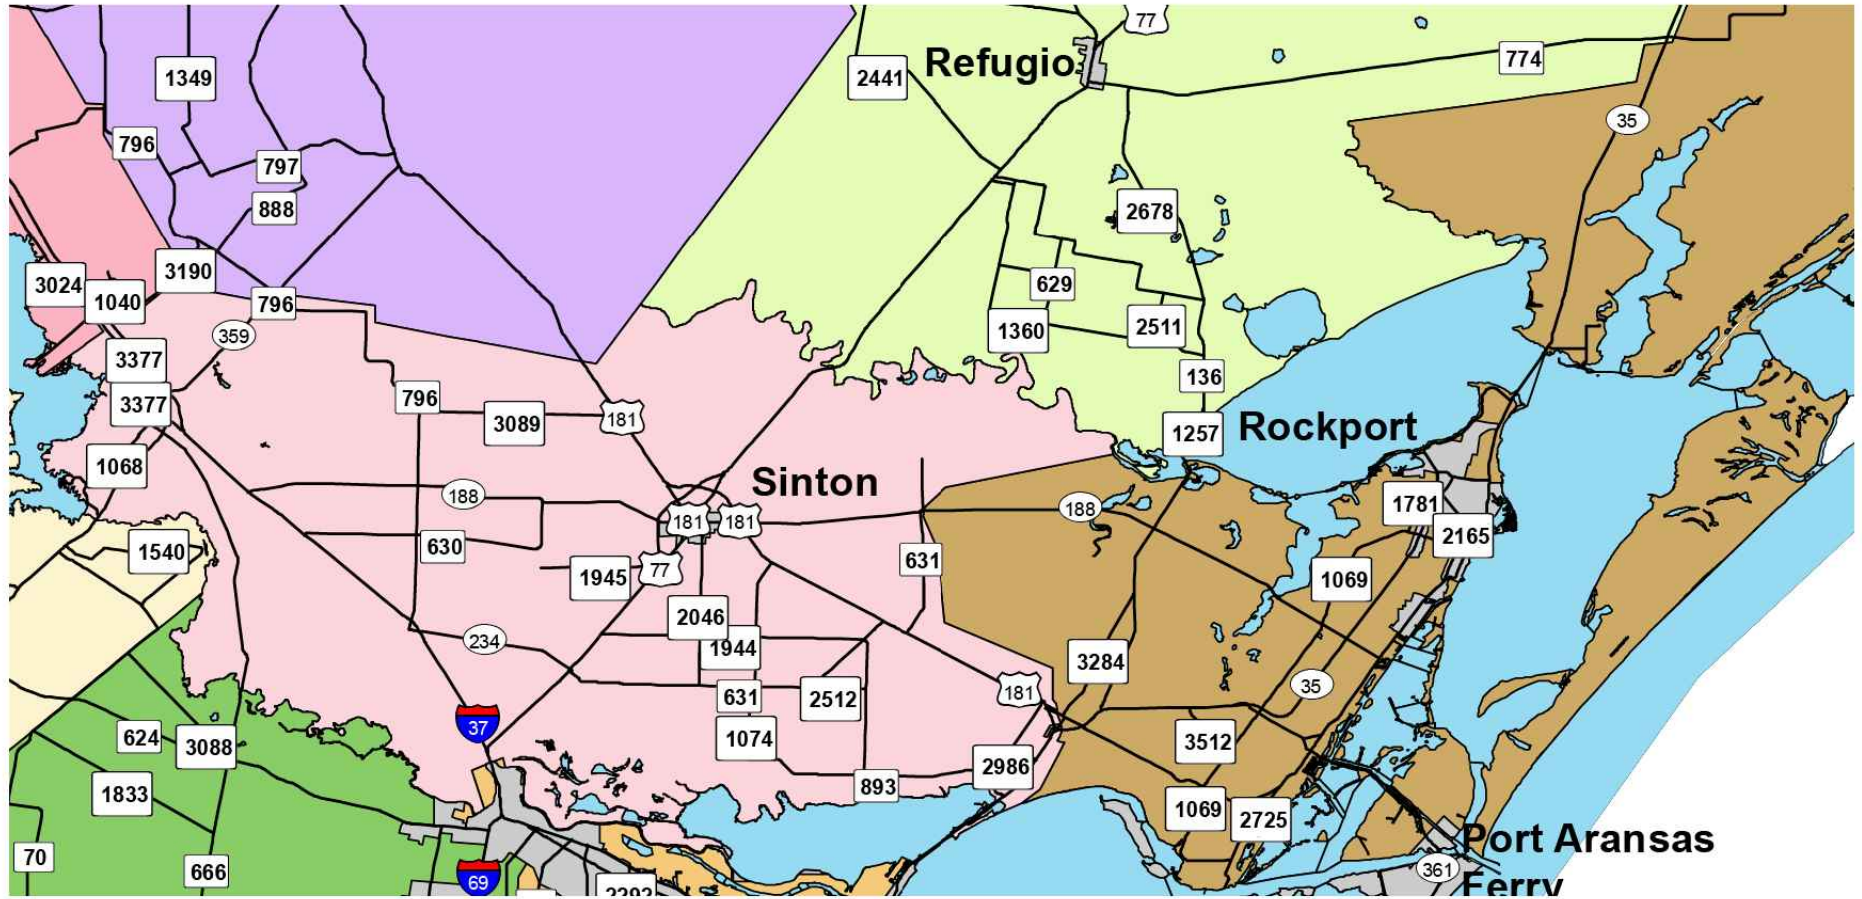

ITEM NO.	DESC NO.	SPEC NO.	DESCRIPTION	UNIT	QTY
8007	6078		FL BS (SITE DEL) (TY A GR 1-2) (SITE 1)	TON	3,500
8007	6079		FL BS (SITE DEL) (TY A GR 1-2) (SITE 2)	TON	3,500

**PLAN SHEET  
& SUMMARY**



CONT	SECT	JOB	HIGHWAY
6379	06	001	VARIES
DIST	COUNTY		SHEET NO.
16	SAN PATRICIO, ETC.		7