STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

AUS	TF	RAVIS. ETC		1
DIST		COUNTY		SHEET NO.
6378	05	001	I	H 35,ETC.
CONT	SECT	JOB		HIGHWAY

FINAL PLANS

DATE WORK COMPLETED AND ACCEPTED: __

FINAL CONTRACT COST: \$___

LIST OF APPROVED CHANGE ORDERS:

I CERTIFY THAT THIS PROJECT

WAS CONSTRUCTED IN SUBSTANTIAL COMPLIANCE WITH THE FINAL AS-BUILT PLANS AND SPECIFICATIONS.

AREA ENGINEER

DATE OF LETTING: DATE WORK BEGAN: _

CONTRACTOR: ___


PLANS OF PROPOSED MATERIALS MAINTENANCE CONTRACT MATERIALS ONLY

PROJECT NUMBER MMC 637805001

TRAVIS, ETC IH 35, ETC

LIMITS: VARIOUS COUNTIES INCLUDING BASTROP, BLANCO, BURNET, CLADWELL, GILLESPIE, HAYS, LEE, LLANO, MASON, TRAVIS AND WILLIAMSON

FOR THE DELIVERY OF MATERIALS CONSISTING OF HYDRAULIC CEMENT, CL C CONC AND FLOWABLE FILL

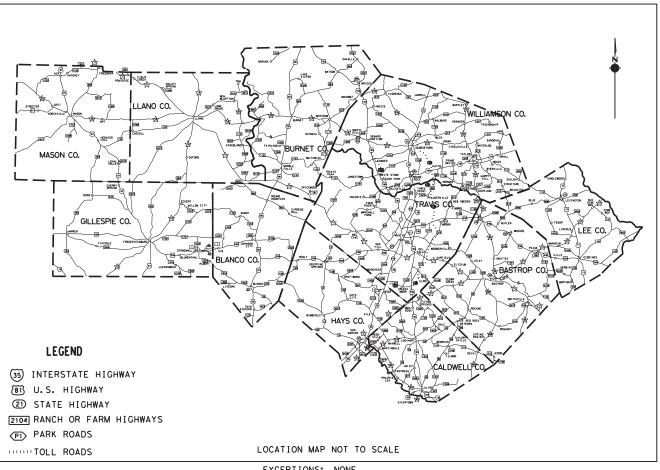

APPROVED FOR LETTING: 4/8/2021

4/8/2021

_P.E. ____DATE

- DocuSigned by:

SUBMITTED FOR LETTING:

-DocuSigned by:

Omar X. De Leon, P.E.

Texas Department of Transportation © TEXAS DEPARTMENT OF TRANSPORTATION; ALL RIGHTS RESERVED

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION ON NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT.

-DocuSigned by: Jacob Wells -03D704AB5F08458.

EXCEPTIONS: NONE EQUATIONS: NONE RAILROAD CROSSINGS: NONE SUBMITTED FOR LETTING:

4/8/2021

-- D18DBE2B94AF4FA..

DISTRICT MAINTENANCE ADMINISTRATOR

DIRECTOR OF OPERATIONS

DISTRICT MAINTENANCE ENGINEER

3-3A



Texas Department of Transportation

INDEX OF SHEETS

© 2021 CONT SECT JOB HIGHWAY

DS: CK: 6378 05 001 IH 35, ETC.

DW: CK: DIST COUNTY SHEET NO.

AUS TRAVIS, ETC. 2

Project Number: MMC 637805001 Sheet: County: Travis, Etc. Control: 637805001

Highway: IH 35, Etc.

GENERAL NOTES:

GENERAL

Contractor questions on this project are to be addressed to the following individual(s): District Maintenance Oswaldo.Lopez@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Written notice will be given to begin work on this project.

Work must begin within seven (7) calendar days after such notification. Time charges will begin when work begins regardless if it falls within seven (7) calendar days of the notification to begin work.

The contractor will have "one hundred twenty" (120) calendar days to complete all work under this contract.

Work under this contract shall consist of "Hydraulic Cement, Hydraulic Cement Concrete and Flowable Backfill" at various locations in "Bastrop, Blanco, Burnet, Caldwell, Gillespie, Hays, Lee, Llano, Mason, Travis, and Williamson Counties".

References to manufacturer's trade name or catalog numbers are for the purpose of identification only. Similar materials from other manufacturers are permitted if they are of equal quality, comply with the specifications for this project, and are approved.

If work is performed at Contractor's option, when inclement weather is impending, and the work is damaged by subsequent precipitation, the Contractor is responsible for all costs associated with replacing the work, if required.

The roadbed will be free of organic material prior to placing any section of the pavement structure.

Equip all construction equipment used in roadway work with highly visible omnidirectional flashing warning lights.

Project Number: MMC 637805001 Sheet: 3
County: Travis, Etc. Control: 637805001

Highway: IH 35, Etc.

Each contract is considered separate and individual from others. Requirements to complete work on any or all contracts may occur at the same time. If requests are issued at the same time, it is expected that the work will be completed in the time frame allowed.

Material orders and delivery are expected to be fulfilled no later than 14 calendar days after request for material is made. Delivery of materials will be coordinated by the responsible Maintenance Supervisor:

Maintenance Office	Supervisor	<u>Phone</u>	<u>Email</u>
Bastrop	Robert Wilson	512-359-6914	Robert.Wilson@txdot.gov
Blanco	Scott D. Scott	830-868-7166	Scott.Scott@txdot.gov
Burnet	Mark Hoefelmeyer	512-756-2316	Mark.Hoefelmeyer@txdot.gov
Caldwell	Michael Self	512-398-2412	Michael.Lynn.Self@txdot.gov
Georgetown	John Taylor	512-930-4700	John.Taylor@txdot.gov
Gillespie	Logan Ketron	830-997-4362	Logan.Ketron@txdot.gov
Lee	Matthew Hurst	512-253-6070	Matthew.Hurst@txdot.gov
Llano	James Low	325-247-5146	James.Low@txdot.gov
Mason	Cole Farmer	325-347-6447	Cole.Farmer@txdot.gov
Travis East & Central	Greg Stephens	512-997-2267	Gregory.Stephens@txdot.gov
Travis North	Anthony Reitan	512-331-5361	Anthony.Reitan@txdot.gov
Travis South	Ronald Switzer	512-627-9874	Ronald.Switzer@txdot.gov
San Marcos	Jesse Serna	512-353-1061	Jesse.Serna@txdot.gov
Williamson East	John Graf	512-309-6016	John.Graf@txdot.gov
Special Jobs	Jason Whitworth	512-292-2440	Jason.Whitworth@txdot.gov

ITEM 2 – INSTRUCTIONS TO BIDDERS

A work order will be issued to the contractor for specific items and quantities to be delivered as well as days to complete the work order.

This Contract includes non-site specific work. Multiple work orders will be used to procure work of the type identified in the Contract at locations that have not yet been determined.

ITEM 6 - CONTROL OF MATERIALS

The Contractor is responsible for furnishing all materials included in this contract. Materials provided by Contractor will be new unless otherwise shown on the plans or approved. The Contractor must receive approval from the Engineer prior to ordering materials for this contract.

The Contractor is required to have sufficient supply of material to complete repair work within the allotted time.

Give a minimum of 1 business day notice for materials, which require inspection at the Plant.

ITEM 7 – LEGAL RELATIONS AND RESPONSIBILITIES

No significant traffic generator events identified.

General Notes Sheet A General Notes Sheet B

Project Number: MMC 637805001 Sheet: County: Travis, Etc. Control: 637805001

Highway: IH 35, Etc.

ITEM 8 – PROSECUTION AND PROGRESS

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages shall be charged each day for failure to meet each work order. This will include:

- 1. Failure to deliver at the starting date or continually progress on the work order.
- 2. Failure to deliver the required materials per day.
- 3. Failure to complete work order within 3 weeks (21 calendar days) from the issue date on work order.

The amount assessed per day for liquidated damages shall be 1 % of the estimated cost of the work order, not to be less than \$200 per day and not to exceed \$500 per day.

ITEM 9 – MEASUREMENT AND PAYMENT

In accordance with Article 9.2 "Plans Quantity Measurement," plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for delivery.

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

ITEM 8012 – HYDRAULIC CEMENT (MATERIALS ONLY)

Minimum delivery will be one truckload.

Coordinate with the designated TxDOT point of contact at least 24 hours prior to delivery.

Supply Ty 1 cement for this Item.

Deliver to site in a cement distributor spreader truck capable of evenly spreading material along roadway. No dump trucks or belly dumps.

ITEM 8014 – HYDRAULIC CEMENT CONCRETE (MATERIALS ONLY)

Minimum delivery will be one truckload.

Coordinate with the designated TxDOT point of contact at least 24 hours prior to delivery.

Provide a copy of approved concrete mix designs on record at the Austin District Lab prior to the delivery.

Supply TxDOT with test specimen cylinders.

Project Number: MMC 637805001

County: Travis, Etc.

Control: 637805001

Highway: IH 35, Etc.

ITEM 8015 – FLOWABLE BACKFILL (MATERIALS ONLY)

Minimum delivery will be one truckload.

Deliveries will be made with mixer with shoot discharge. Coordinate with the designated TxDOT point of contact at least 24 hours prior to delivery.

Sheet: 3A

Provide a copy of approved concrete mix designs on record at the Austin District Lab prior to the delivery.

General Notes Sheet C General Notes Sheet D



QUANTITY SHEET

CONTROLLING PROJECT ID 6378-05-001

DISTRICT Austin HIGHWAY IH0035, Etc.

COUNTY Travis, Etc.

			CONTROL SECTION JOB	6378-0	5-001		
			PROJECT ID	A0014	10300		
			COUNTY	Tra	vis	TOTAL EST.	TOTAL FINAL
			HIGHWAY	IHO	035		
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8012-6051	HYDRAULIC CEMENT	TON	150.000		150.000	
	8014-6003	CL C CONC	CY	50.000		50.000	
	8015-6001	FLOWABLE FILL	CY	150.000		150.000	



DISTRICT	COUNTY	CCSJ	SHEET
Austin	Travis, Etc.	6378-05-001	4

Austin District Maintenance Office



LOCATION SUMMARY

© :	2021	CONT	SECT	JOB	HIGHWAY		YAY
DS:	CK:	6378	05	001	ΙH	35,	ETC.
DW:	CK:	DIST		COUNTY		SHEE	T NO.
		AUS	Т	RAVIS. ETC		- 1	7