

INDEX OF SHEETS

SHEET NO.	DESCRIPTION GENERAL
1	TITLE SHEET
2	SITE MAP
3, 3A-3B	GENERAL NOTES
4	QUANTITY SHEET
5	QUANTITY SUMMARIES

**STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION**



FHWA TEXAS DIVISION	PROJECT NO.		SHEET NO.
	MMC 6385-70-001		1
STATE	DISTRICT	COUNTY	
TEXAS	LFK	HOUSTON	
CONTROL	SECTION	JOB	HIGHWAY NO.
6385	70	001	SL 304

**PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT**

TYPE OF WORK:

MATERIAL ONLY: FLEXIBLE BASE

MMC 6385-70-001

SL 304

HOUSTON COUNTY MAINTENANCE SECTION
(DELIVERY TO YARD)

SEE SHEET #2 FOR LOCATION MAP

©2021



RECOMMENDED FOR LETTING:

DocuSigned by:

Jeremy King, P.E.
DISTRICT MAINTENANCE ENGINEER
5135292FE4184A4...

6/24/2021

DATE

APPROVED FOR LETTING:


DocuSigned by:

Zoe Boyer, P.E.
DIRECTOR OF OPERATIONS

6/24/2021

DATE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

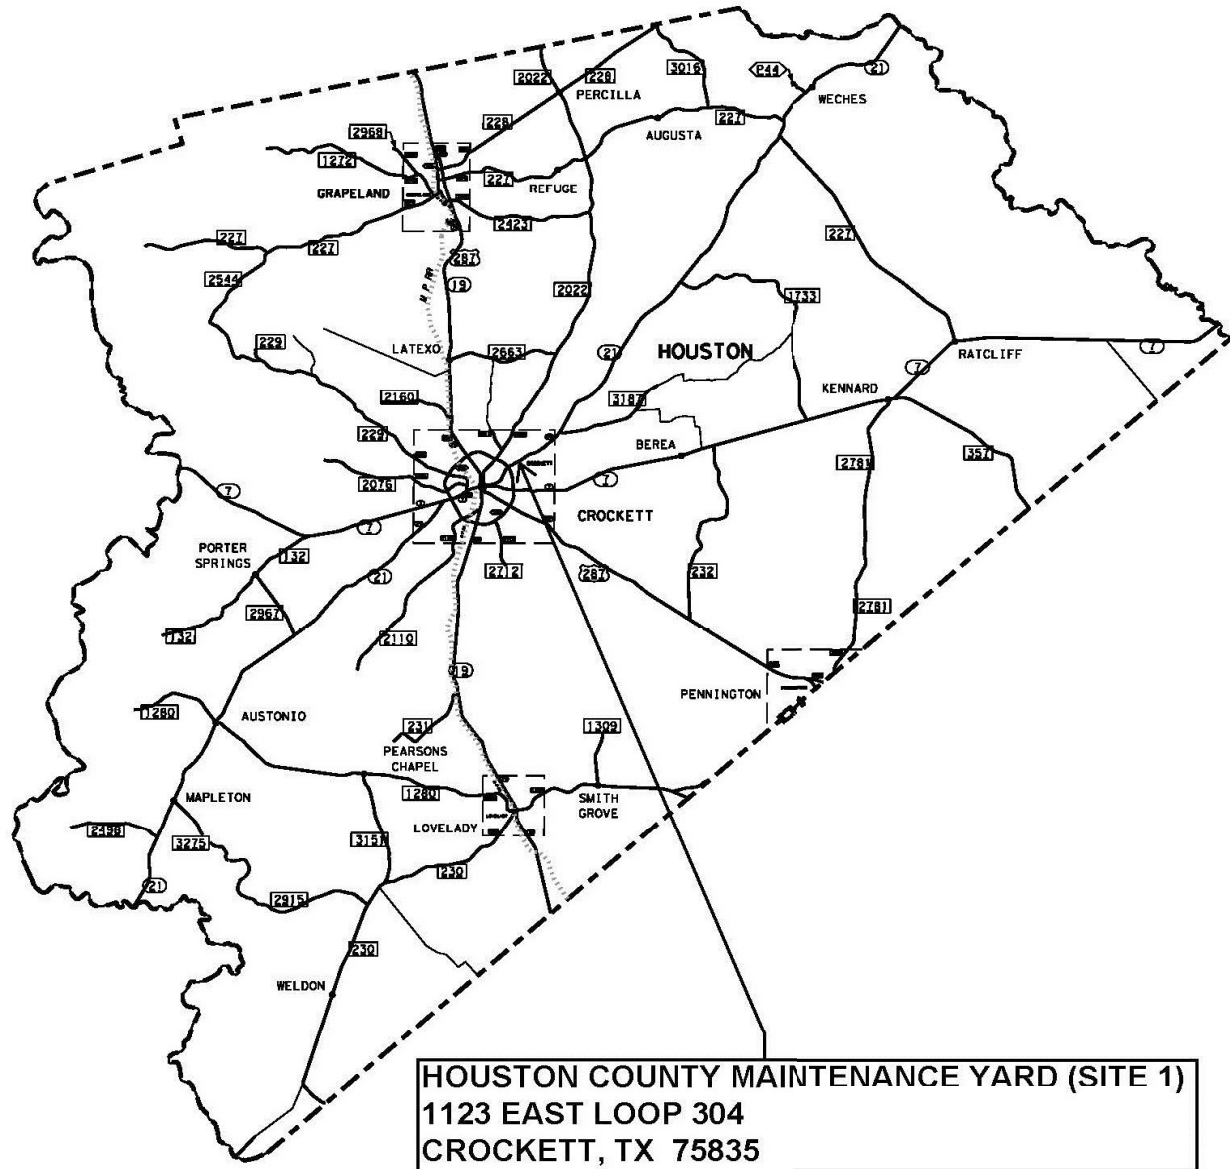

SITE MAP			
©2021 Texas Department of Transportation			
CONT	SECT	JOB	HIGHWAY
6385	70	001	SL 304
DIST	COUNTY		SHEET NO.
LFK	HOUSTON		2

Project Number: MMC 6385-70-001**Control: 6385-70-001****County: Houston****Highway: SL 304****GENERAL NOTES:**

PROJECT DESCRIPTION: Deliver Flexible Base (material only) to the Houston County Maintenance Yard for use on state-maintained roadways within the Houston County Maintenance Section.

Jeremy King Jeremy.King@txdot.gov
 Tammy Gibson Tamara.Gibson@txdot.gov

Contractor questions will only be accepted through email to the above individual(s). All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

[http://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/](http://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/)

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

TXDOT PROJECT SUPERVISORS: All work on this contract will be scheduled and directed by the Maintenance Section Supervisor listed below. Payment will be made monthly for work completed and accepted according to specifications. All payment requests should be directed to the following Maintenance Section Supervisor listed below.

<u>COUNTY</u>	<u>SUPERVISOR</u>	<u>ADDRESS</u>	<u>CONTACT #</u>
Houston	Danny Luna	1123 East Loop 304 Crockett, TX 75835	(936) 544-2264

CONTRACT PROSECUTION: Each contract awarded by the Department stands on its own and, as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

ITEM 2: INSTRUCTIONS TO BIDDERS

View plans on-line or download from the web at:

http://www.txdot.gov/business/contractors_consultants/plans_online.htm

Project Number: MMC 6385-70-001**Control: 6385-70-001****County: Houston****Highway: SL 304**

Order plans from any of the plan reproduction companies shown on the web at:

<http://www.txdot.gov/business/letting-bids/repro-companies.html>

Bid items on this contract are listed to establish a unit price for each item. Certain items listed in the proposal may not be used if it is determined by the Engineer that the work will not be required. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

ITEM 4: SCOPE OF WORK

The contract may be extended twice if in the judgment of the Engineer, the contractor has satisfactorily fulfilled the terms and conditions of the contract. The extension must be agreed upon in writing by both parties to the contract and may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract or any mutually agreed modifications to the said terms and conditions by one or more cumulative change orders. The Engineer will set a deadline for completing the agreements. This deadline will be based in the time needed to re-let and award a new contract if no extension is agreed upon.

ITEM 8: PROSECUTION AND PROGRESS

Contract Time - The number of calendar days for this project shall be 120 days or until contract funds are expended.

Time charges will be in accordance with Article 8.3.1.5 "Calendar Day".

Per Special Provision 000-658, Schedule of Liquidated Damages, charges could occur if requested materials are not ready for delivery with 24 hours' notice. Notify the Houston County Maintenance Supervisor when encountering any unforeseen delays.

ITEM 500: MOBILIZATION

Mobilization does not apply to this materials contract.

ITEM 8000: Flexible Base (MATERIALS ONLY)

Delivery cost for each delivery will be calculated and included in the per ton cost

For Type E material, furnish crushed limestone produced and graded from oversize quarried aggregate that originates from a single, naturally occurring source. Do not use caliche, iron ore, gravel, or multiple sources.

Flexible Base will not contain more than 1% by weight of clay balls.

Project Number: MMC 6385-70-001

Control: 6385-70-001

County: Houston

Highway: SL 304

Flexible Base will be provided with a minimum PI of 2. Flexible Base will be provided with a minimum bar linear shrinkage of 2%.

This contract is for small quantities only. A work order will be issued to the contractor a minimum of 24 hours in advance and the contractor shall be able to provide agreed upon amounts as needed.

Contact the Houston County Maintenance Supervisor at least 1 hour prior to delivery.

The Contractor's driver shall report to the Houston County Maintenance Supervisor or their representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time of delivery and departure.

The site locations are as follows:

- Site 1 - Houston County Maintenance Yard
1123 East Loop 304
Crockett, Texas 75835
3,000 tons (120 loads)

For Hauling Operations

- Make all deliveries to the Houston County Maintenance Yard located at 1123 East Loop 304, Crockett, Texas, 75835.
- Make all deliveries between the hours of 7:00 am and 3:00 pm CST unless prior arrangements have been made with the Houston County Maintenance Supervisor.



CONTROLLING PROJECT ID 6385-70-001

DISTRICT Lurkin
HIGHWAY SL0304

COUNTY Houston

QUANTITY SHEET

CONTROL SECTION JOB		6385-70-001			
PROJECT ID	A00180217	TOTAL EST.			
COUNTY	Houston	TOTAL FINAL			
HIGHWAY	SL0304				
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	800/-6063	FL BS (SITE DEL) (TY E GR 2) (SITE 1)	TON	3,000,000	3,000,000




Report Generated By: kdotconnect_internal_ext

Report Created On: Jun 21, 2021 2:42:48 PM

DISTRICT	COUNTY	COSJ	SHEET
Lurkin	Houston	6385-70-001	4

SUMMARY OF MATERIALS ITEMS			
		ITEM NO.	8007
COUNTY	HIGHWAY NO.	FLBS (TY E GR 2) (DELIVERY)	
		TON	
HOUSTON	SITE 1: 1123 EAST LOOP 304, CROCKETT, TX 75935	3,000	
PROJECT TOTALS		3,000	

QUANTITY SUMMARIES			
©2021  Texas Department of Transportation®			
CONT	SECT	JOB	HIGHWAY
6385	70	001	SL 304
DIST	COUNTY		SHEET NO.
LFK	HOUSTON		5