
STATE OF TEXAS TEXAS DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT FOR PURCHASE, DELIVERY & PICK-UP OF MATERIALS ONLY: DENSE-GRADE HOT-MIX ASPHALT PROJECT NO: MMC 6387-49-001 CSJ: 6387-49-001 LIMITS: *

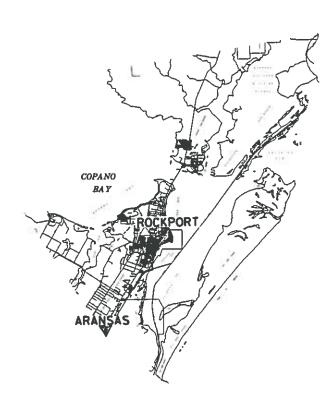

*ROCKPORT MAINTENANCE OFFICE AREA OF RESPONSIBILITY

INDEX OF SHEETS

TITLE SHEET

2A-2D GENERAL NOTES

ESTIMATE & QUANTITY SHEET PLAN SHEET & SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL

GOVERN ON THIS PROJECT

TEXAS DEPARTMENT OF TRANSPORTATION

SUBMITTED FOR LETTING:

APPROVED FOR LETTING:

DIRECTOR OF MAINTENANCE

BRIDGE ENGINEEN

County: ARANSAS, ETC Control: 6387-49-001

General Notes

This project includes plan sheets that are not part of the bid proposal. Plans can be viewed online or downloaded from the web at:

http://www.txdot.gov/business/letting-bids/plans-online.html

Order plans from any of the plan reproduction companies shown on the web at:

http://www.dot.state.tx.us/business/contractors consultants/repro companies.htm

Information concerning the project, plans, limits and locations may also be obtained by contacting the Director of Maintenance James Harris, P.E. or the Supervisor in charge of this project.

All Contractor pre-bid questions on this project are to be submitted by email to the following individual(s):

Director of Maintenance James D. Harris, P.E. <u>James.Harris1@txdot.gov</u>

Area Engineer

Sinton Area Office Robert Isassi, P.E. Robert.Isassi@txdot.gov

Assistant Area Engineer

Sinton Area Office Eric Martinez, P.E. Eric.Martinez@txdot.gov

Contractor questions will only be accepted through email to the above individuals. All contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/

All pre-bid questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Prior to beginning operations, a meeting will be held at the District Headquarters that should include material supplier and maintenance section supervisors within the contract area.

If several contracts are awarded to the same contractor, the contractor shall be sufficiently equipped to concurrently supply each contract material.

County: ARANSAS, ETC Control: 6387-49-001

Each contract awarded by the Department stands on its own and as such, is separate from other contracts.

General Requirements and Covenants - Items 1 thru 9

Project Description - This project shall consist of the purchase and delivery of Dense-Graded Hot-Mix Asphalt materials from the hot-mix asphalt plant to the Maintenance Section's designated locations specified as well as the purchase and pickup of Dense-Graded Hot-Mix Asphalt materials from the hot-mix asphalt plant. See estimate and quantity sheet for type and quantity of materials.

Area Engineer	Address	Contact Person
Robert Isassi, P.E.	11571 US Hwy 181	(361)364-6402
	Sinton, TX 78387	

Maintenance Section	Address	Maintenance Supervisor
Rockport	1401 FM 3036	John M Jacobs
	Rockport, TX 78382	(361)729-2411

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered or picked up.

The contractor is responsible for furnishing and delivering the dense-graded hot-mix asphalt to the agreed upon location(s). The delivery hours will be Monday through Friday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Various bid items and their associated quantities have been provided within this Contract in order to establish bid prices for the proposed work. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

ITEM 2 – Instruction to Bidders

By signing this proposal, a bidder acknowledges that he/she has a copy of the "Standard Specifications for Construction of Highways, Streets and Bridges", adopted by the Texas Department of Transportation, November 1, 2014. This specification book may be purchased from the Department.

County: ARANSAS, ETC Control: 6387-49-001

ITEM 3 - Award and Execution of Contract

Material requests shall be issued by Work Order to the Contractor a minimum of 24 hours in advance. Each Work Order shall specify quantities to be delivered or picked up, location of delivery, and days to complete Work Order. A minimum of 20 Tons per work order will be required for delivery only. Material requests for pickup will vary depending on need by the Maintenance Supervisor.

ITEM 4 - Scope of Work

This contract may be extended per Special Provision 004-004.

ITEM 6 – Control of Materials

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website:

https://www.txdot.gov/business/resources/producer-list.html

ITEM 8 – Prosecution and Progress

Contract time charges shall begin upon issuance of "Authorization to Begin Work" letter. One hundred and twenty (120) Working Days have been designated for this contract. Working Days shall be computed and charged in accordance with Article 8.3.1.5 "Calendar Day."

Individual Work Order charge days shall run concurrently with Contract time charges.

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages shall be charged each day for failure to meet each work order. This will include:

- 1. Failure to produce at the starting date or continually progress on the work order.
- 2. Failure to produce the required number of tons per day.

The amount assessed per day for liquidated damages shall be 5 % of the estimated cost of the work order, but not to be less than \$200 per day and not to exceed \$500 per day.

ITEM 9 - Measurement and Payment

In accordance with Article 9.2 "Plans Quantity Measurement," plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for pickup. Maintenance Sections may request quantities varying from those shown in the plans to meet their needs.

County: ARANSAS, ETC Control: 6387-49-001

ITEM 8011 – Dense-Graded Hot-Mix Asphalt (Small Quantity) (Materials Only)

Mixture designs, without additives, failing to meet the requirements of Table 6 will require the addition of a minimum 1.0% of Type A hydrated lime based on dry weight of the total aggregate.

Use of Recycled Asphalt Shingles (RAS) in the HMACP surface course is not permitted.

Do not add additional quantity of RAP to stockpiles tested and approved. If additional RAP is added to a stockpile, a new design and trial batch will be required prior to placement on the roadway.

The extracted aggregate from contractor-owned RAP shall have a minimum of 85% two crushed faces when tested in accordance with TEX-460-A, Part I.

Deliver Hot Mix to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.


There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.

Project No.: MMC 6387-49-001 **Page 3**

County: Aransas, etc

ESTIMATE & QUANTITY

ITEM	DESC	SPEC				
NO.	NO.	NO.	DESCRIPTION	UNIT	QTY	FINAL
8011	6001		D.CP HMA(SO)TV D.PG 64-22 (PICKLIP)	TON	200	
8011	6002		D-GR HMA(SQ)TY D PG 64-22 (PICKUP) D-GR HMA(SQ)TY D PG 64-22 (DELIVERY)	TON	1,800	
0011	0002		D-GRTIMA(GQ)TT DT G 04-22 (DELIVERT)	TON	1,000	
						·

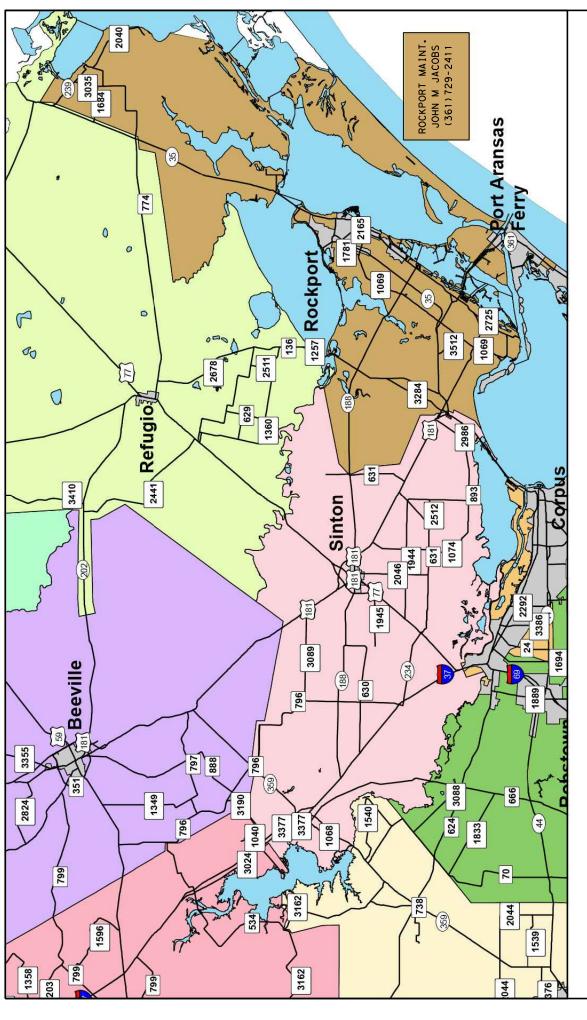

PLAN SHEET & SUMMARY

လ (ITEM DESC SPEC	DESCRIPTION	UNIT QTY	ΩTY
8011 6001		D-GR HMA(SQ)TY D PG 64-22 (PICKUP)	TON	200
8011 6002		D-GR HMA(SQ)TY D PG 64-22 (DELIVERY)	TON	TON 1,800

		Tiecas Department of Thansportedon	ount, sent	Se Common
CONT	SECT	gor		HIGHWAY
6387 49	49	100	SH	SH 35, ETC
DIST		COUNTY		SHEET NO.
16	ΑF	ARANSAS. ETC.	ن.	7