


STATE OF TEXAS
TEXAS DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT
FOR PURCHASE, DELIVERY & PICK-UP OF MATERIALS ONLY:
DENSE-GRADE HOT-MIX ASPHALT
PROJECT NO: MMC 6386-20-001
CSJ: 6386-20-001
LIMITS: *

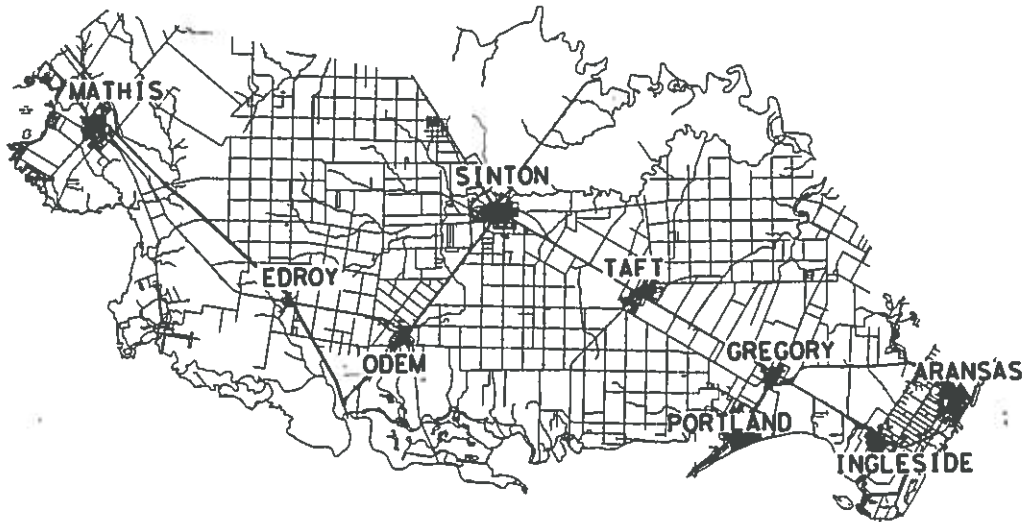

*SINTON MAINTENANCE OFFICE AREA OF RESPONSIBILITY

INDEX OF SHEETS

1	TITLE SHEET
2A-2D	GENERAL NOTES
3	ESTIMATE & QUANTITY SHEET
4	PLAN SHEET & SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT



SUBMITTED
FOR LETTING: July 13 20 21
Alan L. Bogan, P.E.
BRIDGE ENGINEER 01

APPROVED
FOR LETTING: 7-13 20 21
James O. Hanni, P.E.
DIRECTOR OF MAINTENANCE

General Notes

This project includes plan sheets that are not part of the bid proposal. Plans can be viewed online or downloaded from the web at:

<http://www.txdot.gov/business/letting-bids/plans-online.html>

Order plans from any of the plan reproduction companies shown on the web at:

http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm

Information concerning the project, plans, limits and locations may also be obtained by contacting the Director of Maintenance James Harris, P.E. or the Supervisor in charge of this project.

All Contractor pre-bid questions on this project are to be submitted by email to the following individual(s):

Director of Maintenance	James D. Harris, P.E.	James.Harris1@txdot.gov
-------------------------	-----------------------	--

Area Engineer Sinton Area Office	Robert Isassi, P.E.	Robert.Isassi@txdot.gov
-------------------------------------	---------------------	--

Assistant Area Engineer Sinton Area Office	Eric Martinez, P.E.	Eric.Martinez@txdot.gov
---	---------------------	--

Contractor questions will only be accepted through email to the above individuals. All contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All pre-bid questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Prior to beginning operations, a meeting will be held at the District Headquarters that should include material supplier and maintenance section supervisors within the contract area.

If several contracts are awarded to the same contractor, the contractor shall be sufficiently equipped to concurrently supply each contract material.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts.

General Requirements and Covenants - Items 1 thru 9

Project Description - This project shall consist of the purchase and delivery of Dense-Graded Hot-Mix Asphalt materials from the hot-mix asphalt plant to the Maintenance Section’s designated locations specified as well as the purchase and pickup of Dense-Graded Hot-Mix Asphalt materials from the hot-mix asphalt plant. See estimate and quantity sheet for type and quantity of materials.

Area Engineer	Address	Contact Person
Robert Isassi, P.E.	11571 US Hwy 181 Sinton, TX 78387	(361)364-6402

Maintenance Section	Address	Maintenance Supervisor
Sinton	11571 US Hwy 181 Sinton, TX 78387	Jeremiah Jerome Boehme (361)364-6400

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered or picked up.

The contractor is responsible for furnishing and delivering the dense-graded hot-mix asphalt to the agreed upon location(s). The delivery hours will be Monday through Friday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Various bid items and their associated quantities have been provided within this Contract in order to establish bid prices for the proposed work. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

ITEM 2 – Instruction to Bidders

By signing this proposal, a bidder acknowledges that he/she has a copy of the "Standard Specifications for Construction of Highways, Streets and Bridges", adopted by the Texas Department of Transportation, November 1, 2014. This specification book may be purchased from the Department.

ITEM 3 - Award and Execution of Contract

Material requests shall be issued by Work Order to the Contractor a minimum of 24 hours in advance. Each Work Order shall specify quantities to be delivered or picked up, location of delivery, and days to complete Work Order. A minimum of 20 Tons per work order will be required for delivery only. Material requests for pickup will vary depending on need by the Maintenance Supervisor.

ITEM 4 - Scope of Work

This contract may be extended per Special Provision 004-004.

ITEM 6 – Control of Materials

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website:

<https://www.txdot.gov/business/resources/producer-list.html>

ITEM 8 – Prosecution and Progress

Contract time charges shall begin upon issuance of "Authorization to Begin Work" letter. One hundred and twenty (120) Working Days have been designated for this contract. Working Days shall be computed and charged in accordance with Article 8.3.1.5 "Calendar Day."

Individual Work Order charge days shall run concurrently with Contract time charges.

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages shall be charged each day for failure to meet each work order. This will include:

1. Failure to produce at the starting date or continually progress on the work order.
2. Failure to produce the required number of tons per day.

The amount assessed per day for liquidated damages shall be 5 % of the estimated cost of the work order, but not to be less than \$200 per day and not to exceed \$500 per day.

ITEM 9 – Measurement and Payment

In accordance with Article 9.2 "Plans Quantity Measurement," plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for pickup. Maintenance Sections may request quantities varying from those shown in the plans to meet their needs.

ITEM 8011 – Dense-Graded Hot-Mix Asphalt (Small Quantity)(Materials Only)

Mixture designs, without additives, failing to meet the requirements of Table 6 will require the addition of a minimum 1.0% of Type A hydrated lime based on dry weight of the total aggregate.


Use of Recycled Asphalt Shingles (RAS) in the HMA surface course is not permitted.

Do not add additional quantity of RAP to stockpiles tested and approved. If additional RAP is added to a stockpile, a new design and trial batch will be required prior to placement on the roadway.


The extracted aggregate from contractor-owned RAP shall have a minimum of 85% two crushed faces when tested in accordance with TEX-460-A, Part I.

Deliver Hot Mix to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.

There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.

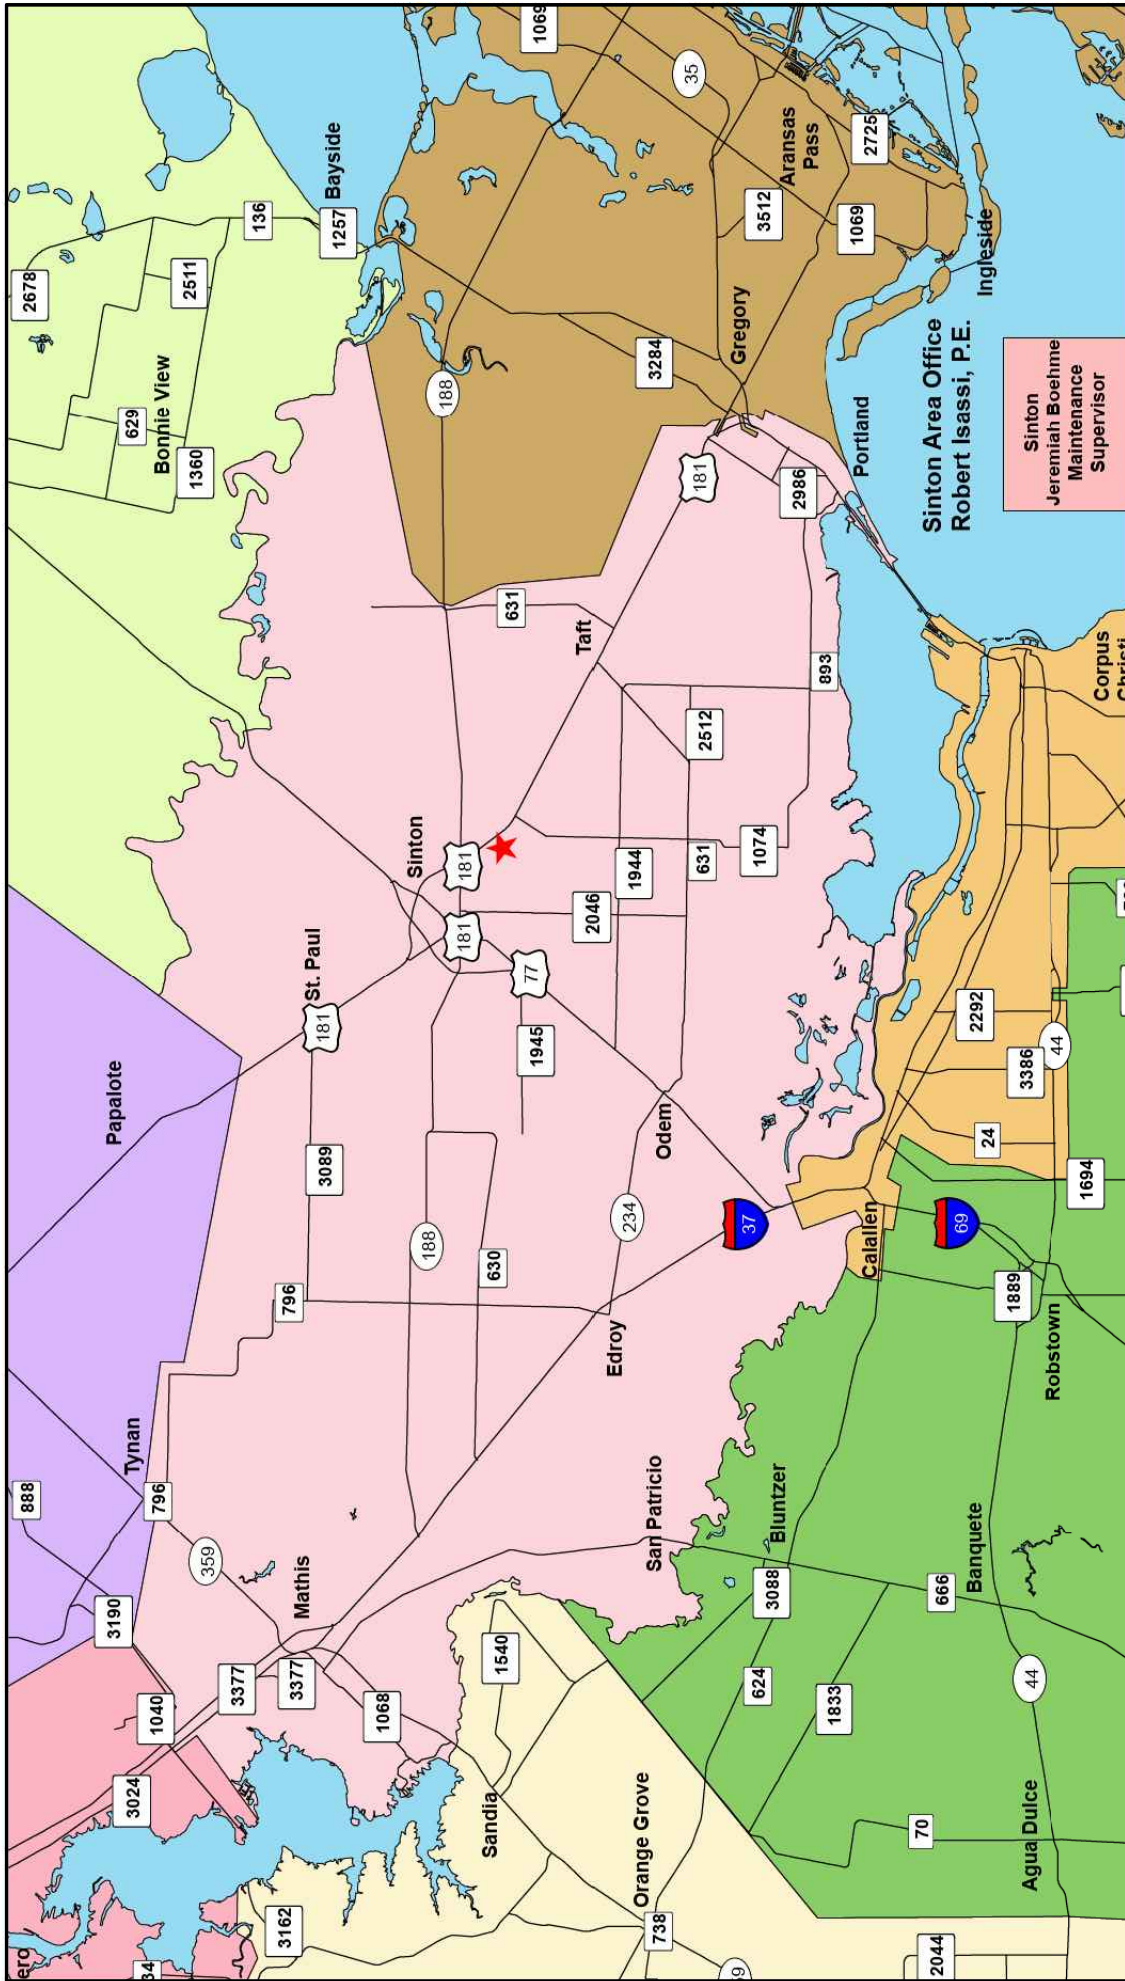

PLAN SHEET & SUMMARY



Texas Department of Transportation

CONT.	SECT.	JOB	HIGHWAY
6386	20	001	US 77, ETC
DIST.	COUNTY	SHEET NO.	
16	SAN PATRICIO	4	

ITEM NO.	DESC NO.	SPEC NO.	DESCRIPTION	UNIT	QTY
8011	6001		D-GR HMA (SQ) TY D PG 64-22 (PICKUP)	TON	400
8011	6002		D-GR HMA (SQ) TY D PG 64-22 (DELIVERY)	TON	3,160