

INDEX OF SHEETS

SHEET NO. DESCRIPTION

GENERAL

- 1 TITLE SHEET
- 2 GENERAL NOTES
- 3 QUANTITY SHEET





STATE OF TEXAS
TEXAS DEPARTMENT OF TRANSPORTATION

WORK CONSISTING OF
FLEX BASE DELIVERY
(MATERIALS ONLY)

PROJECT NO: MMC 6381-71-001
COUNTY: VICTORIA CO, ETC.

| | | |
|-------------------|-----------------|----------------|
| FED. RD. DIV. NO. | PROJECT NO. | SHEET NO. |
| | MMC 6381-71-001 | 1 |
| STATE | STATE DIST. | COUNTY |
| TEXAS | YKM | VICTORIA, ETC. |
| CONT. | SECT. | JOB |
| | | HIGHWAY NO. |

YOAKUM DISTRICT

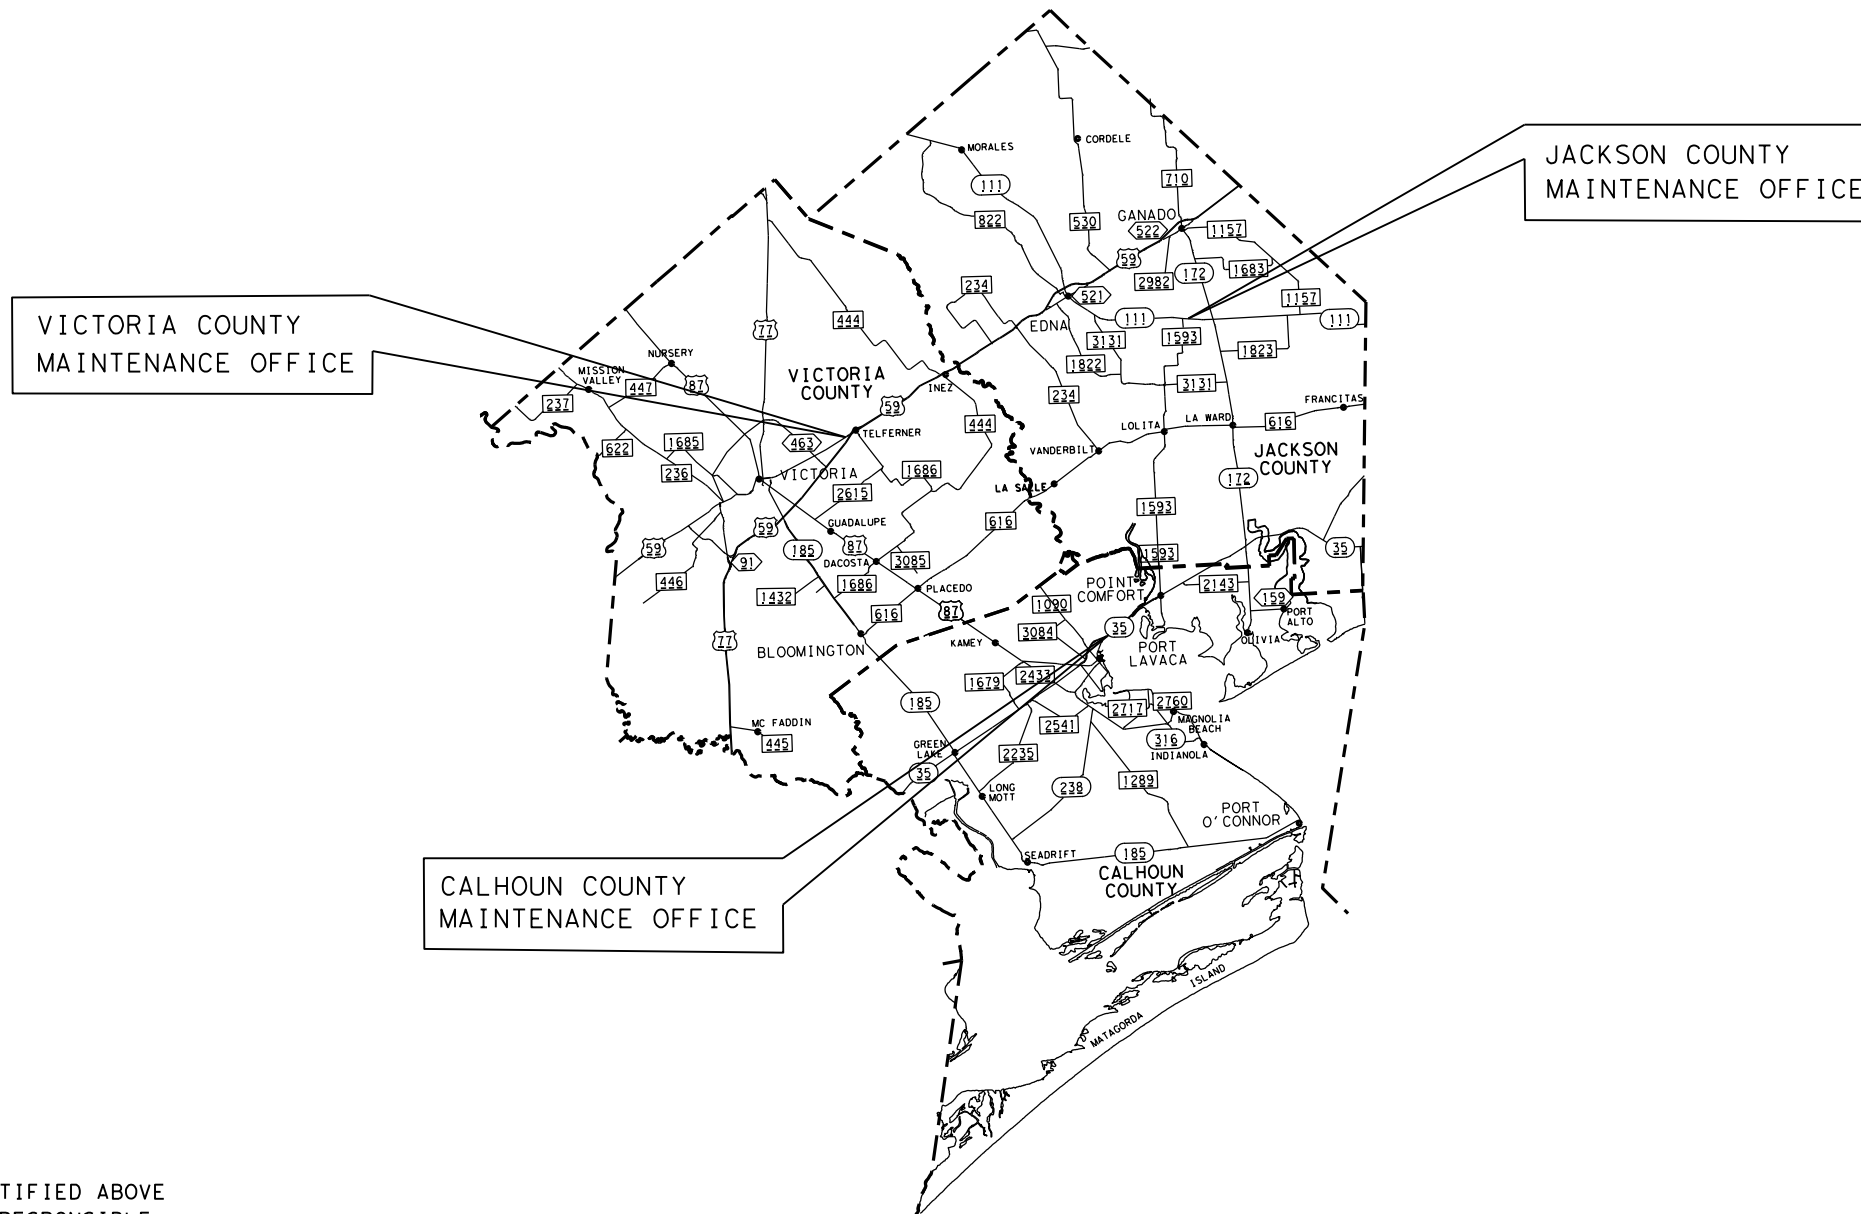

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

Mark C. Netardus P.E.
MAINTENANCE ENGINEER

9-10-21
DATE

CALHOUN, JACKSON
AND VICTORIA COUNTIES

YOAKUM DISTRICT

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSING: NONE

APPROVED FOR LETTING: 9/21/2021

Michael J. Walsh Jr., P.E.

DIRECTOR OF OPERATIONS



SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT:

© 2021 by Texas Department of Transportation; all rights reserved.

Project Number: MMC 6381-71-001

County: VICTORIA COUNTY, ETC.

GENERAL NOTES:

This is a contract for supplying material on an as needed basis.

Bid price should include furnishing material and delivery within the county or to designated location(s) specified.

The material will be delivered to the following locations:

Victoria County Maintenance Yard – ST 1
11401 US 59 N
Victoria, Texas 77905

Jackson County Maintenance Yard – ST 2
1025 S. Wells
Edna, Texas 77957

Calhoun County Maintenance Yard – ST 3
2275 North SH 35
Port Lavaca, Texas 77979

Contractor questions on this project are to be addressed to the following individual(s):

Mark Netardus Mark.Netardus@txdot.gov
Mike Walsh Mike.Walsh@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Project Number: MMC 6381-71-001

County: VICTORIA COUNTY, ETC.

The contact information for the Maintenance Supervisor's for the following counties are:

Victoria County: Will Sorensen 361-407-9024 or Will.Sorensen@txdot.gov
Jackson County: Jeff Gerdes 361-782-5917 or Jeffrey.Gerdes@txdot.gov
Calhoun County: Jon Adame 361-935-3656 or Jon.Adame@txdot.gov

The corresponding Maintenance Supervisor will be the primary point of contact for this contract. The Maintenance Supervisor will work in conjunction with the Contractor to establish an agreement on the specifics of the material delivery.

The contractor is responsible for furnishing and delivering the aggregates for surface treatments to the specified location(s) listed above. The delivery hours will be Monday through Thursday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

ITEM 4: SCOPE OF WORK

If agreed upon in writing by both parties to the contract, the contract may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract plus any approved terms and conditions made by previously approved change orders.

ITEM 8007: FLEXIBLE BASE (MATERIALS ONLY)

For Type A material, furnish crushed limestone produced and graded from oversize quarried aggregate that originates from a single, naturally occurring source. Do not use caliche, iron ore, gravel, or multiple sources.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6381-71-001

DISTRICT Yoakum

COUNTY Victoria

HIGHWAY US0059

| CONTROL SECTION JOB | | | | 6381-71-001 | | TOTAL EST. | TOTAL FINAL |
|---------------------|-----------|---|------|-------------|-------|------------|-------------|
| PROJECT ID | | | | A00176979 | | | |
| COUNTY | | | | Victoria | | | |
| HIGHWAY | | | | US0059 | | | |
| ALT | BID CODE | DESCRIPTION | UNIT | EST. | FINAL | | |
| | 8007-6078 | FL BS (SITE DEL) (TY A GR 1-2) (SITE 1) | TON | 1,500.000 | | 1,500.000 | |
| | 8007-6079 | FL BS (SITE DEL) (TY A GR 1-2) (SITE 2) | TON | 1,500.000 | | 1,500.000 | |
| | 8007-6080 | FL BS (SITE DEL) (TY A GR 1-2) (SITE 3) | TON | 1,500.000 | | 1,500.000 | |