

Project Number: RMC 639122001

County: Morris, etc.

Highway: FM0161, etc.

GENERAL NOTES:

General:

Contractor questions on this project are to be emailed to the following individuals:

Jason Dupree, P.E., Director of Maintenance – Atlanta District Jason.Dupree@txdot.gov Charlotte Aslin - Contract Specialist Charlotte.Aslin@txdot.gov

Contractor questions will only be accepted through email to the above individuals. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Questions regarding the plans and/or the project after the contract has been awarded should be referred to the Managing Supervisor:

Carl Peters Maintenance Supervisor – Daingerfield 552 US 259 North Daingerfield, Texas 75638 (903) 645-2519

This project consists of performing mowing operations at various locations in Morris, Marion, Cass, Titus, Camp and Upshur Counties in the Atlanta District.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

Do not park personal vehicles of employees within the right-of-way at any time, including any section closed to public traffic, unless the vehicle is being used for the construction procedures.

Control: 6391-22-001

Sheet 2

Project Number: RMC 639122001

County: Morris, etc.

Highway: FM0161, etc.

If approved by the Department, employees may park on the right-of-way at sites where the contractor has his office or equipment and materials storage yard.

occasionally visit worksites either on the highway surface or right-of-way.

flying objects, or from electrical shock or burns.

Non-compliance with this requirement will be grounds for suspension of work.

Item 2: Instructions to Bidders

This project includes plan sheets that are not part of the bid proposal. Views plans on-line or download from the web at: http://www.txdot.gov.state.tx./business/plansonline/plansonline.htm.

Order plans from any of the plan reproduction companies shown on the web at: http://www.dot.state.tx.us/business/contractors consultants/repro companies.htm.

Item 3: Award and Execution of Contract

This mowing cycle will not start before June 1 unless otherwise directed by the engineer. This contract will end by December 15, 2022. No further work will be performed after this date, unless there is a mutual agreement between the contractor and the department.

Item 4: Scope of Work

In the event the contract is extended in accordance with Special Provision 004-001, no additional mobilization will be added to the contract or paid for the extension.

Item 8: Prosecution and Progress

Notify the Engineer prior to and upon the completion of the work cycle.

Unless otherwise directed, prosecute the work continuously to completion of the contract.

Supply an adequate size crew experienced in the type of work described within these specifications and capable of performing the work in a safe and timely manner. Furnish all equipment, tools, and machinery for the proper prosecution of the work. Equipment, tools, and machinery will be on the work site in good operating condition and have all manufacturers' safety features in proper working condition prior to beginning work and remain in place during the prosecution of the work. All equipment, tools, and machinery will be capable of maintaining a continuous work schedule for the satisfactory completion of the project.

Sheet 2

Control: 6391-22-001

- Department-approved safety hats and safety vests will be worn by all workers and visitors when:
 - Workers are outside of vehicles at all outdoor worksites. This includes those who
 - Working in areas where there is a danger of head injury from impact, from falling or

Project Number: RMC 639122001

County: Morris, etc.

Highway: FM0161, etc.

Unless otherwise approved, work will not begin before daylight and all operations will stop in sufficient time to have signs removed from the road before dark.

Item 502: Barricades, Signs and Traffic Handling

Ensure equipment and materials are a minimum of thirty (30) feet from the edge of the travel lane during non-working hours.

Provide clear and legible traffic control signs during all phases of mowing operations. If the signs are not clearly legible, the Engineer will suspend work until they are replaced with legible, factory made signs.

Item 730: Roadside Mowing

The Department will determine all non-mow and vegetative management areas.

Mowing will be in accordance with Article 730.3.2.2 "Full-Width Mowing."

This contract includes three (3) cycles of Mowing. See the Summary Table included in the general notes for total acres and working days per cycle.

The Department will issue a written notice to begin work. In this notice, the contractor will be given the number of acres required to be mowed, the number of working days allowed to complete the mowing cycle and the date when time charges for the cycle will start. Liquidated damages will be assessed for any working day(s) charged beyond the authorized time. Time will be suspended between cycles.

Provide adequate equipment meeting all requirements to average one-hundred (100) acres per day for full width mowing. The Department will inspect the equipment to ensure that all mowers are adjusted properly for the correct mowing height and meet all safety requirements prior to beginning mowing operations and at any time during the contract period. Each tractor's headlights and flashers will be in working condition and turned on during mowing operations.

Use strobe lights or rotating beacons on all motorized equipment, operating on or adjacent to the road surface.

Adjust mowers for a cutting height of approximately five (5) inches.

On rotary mowers the Manufacturer's safety device may be used in lieu of safety chains subject to the approval of the Engineer.

Mow areas too narrow to mow between obstacles with hinged or batwing mowers by smaller rigid frame rotary mowers and/or other methods available within this contract as approved.

Hand-trimming will be required around fixed objects within the mowed area of the right-of-way including but not limited to, metal beam guard fence, cable barrier system, headwalls, culvert

Control: 6391-22-001

Sheet 2

Project Number: RMC 639122001

County: Morris, etc.

Highway: FM0161, etc.

ends, sign posts, delineator posts, mailboxes, luminaire poles, traffic signal poles, signal controllers and certain shrubs and plantings used in landscaping. Hand trimming will not be required around natural growing trees. Hand trimming will be performed within the signed work area for the mowers. Failure to maintain the hand trimming operation within these limits will be cause to suspend the mowing operation until the hand-trimming catches up.

Trees and brush will be cut up to one and one half inches in diameter in the entire mowed area. This will include cutting trees and brush along creeks and drainage ditches.

Repair damage caused by the Contractor's operations to the highway right of way, including signs, fences, delineators, plant materials or any other appurtenances part of or adjacent to the highway facility. The Department has the authority to charge the Contractor for any damage not repaired.

Do not disturb survey stakes on the right of way. If operations disturb survey stakes, the Contractor will be responsible for reestablishing survey stakes at his own cost. Reestablishing survey stakes will be performed by a Registered Public Land Surveyor.

Mowing operations will match adjacent land use. Mowing will be performed ROW line to ROW line in front of houses, developed areas, and pastures. At structure locations, mowing operations will also be full width to provide for drainage. As a minimum, mowing operations will be performed ten (10) feet beyond the ditch line in cut sections.

The highways and acres listed below comprise the entire tract to be mowed per cycle.

County	Hwy	Limits	No. of Acres Per Cycle
Morris- Upshur	US 259	From: SH 11 To: SH 155	133
Morris- Cass	SH 11	From: US 259 E. int. To: SH 11 & SH 49 E. of Hughes Springs	66
Cass	SH 49	From: SH 11 E. of Hughes Springs To: Cass-Marion County Line	88
Morris- Cass	SH 77	From: US 67 To: FM 250	124
Cass- Marion- Upshur	SH 155	From: SH 49 To: US 259	111

Sheet 2

Control: 6391-22-001

Estimate/Ouantity Sheet

Tract 2 – Rural Cycles 1 & 3

County: Morris, etc.

Highway: FM0161, etc.

Tract 2 – Cycle 1 (Continued)

County	Hwy	Limits	No. of Acres Per Cycle
Morris- Cass	FM 130	From: US 259 To: FM 250 E. int.	91
Morris- Cass	FM 161	From: SH 338 To: SH 155	209
Cass- Morris	FM 250	From: SH 77 To: US 259	125
Morris- Marion	FM 729	From: US 259 To: SH 155	36
Morris	FM 1400	From: Begin State Maintenance To: FM 130	16
Cass	FM 2612	From: FM 250 To: SH 11 & SH 49 E. of Hughes Springs	52
Cass	FM 2888	From: SH 77 To: FM 250	84
Morris	FM 3421	From: US 259 To: FM 250	37
Cass- Morris	US 67	From: Bowie-Cass County Line To: US 259	45
Morris	US 259	From: IH 30 To: SH 11	277
Camp- Titus- Morris	SH 11	From: Pittsburg E. City Limits To: US 259 E. int.	111
Morris	SH 49	From: Titus-Morris County Line To: US 259	70
Morris	SH 77	From: US 259 To: US 67	69
Morris	SH 338	From: SH 77 To: US 259	95
Morris	FM 144	From: US 67 To: US 259	143
Morris	FM 161	From: US 67 To: SH 338	8
Camp- Upshur	FM 557	From: Pittsburg S. City Limits To: US 259	122

Project Number: RMC 639122001

County: Morris, etc.

Highway: FM0161, etc.

Tract 2 – Cyc

County	Hwy	Limits	No. of Acres Per Cycle
Upshur	FM 593	From: US 271 To: FM 2796	45
Camp- Upshur	FM 993	From: Pittsburg S. City Limits To: FM 593	77
Morris	From: FM 144		31
Camp- Upshur	FM 1975	From: FM 557 To: FM 593	20
Camp	FM 2057	From: FM 557 To: End State Maintenance	20
Camp	From: Pittsburg S. City Limits		55
Upshur	FM 2796	From: FM 593 To: FM 557	58
Morris	SP 284	From: FM 144 To: US 259	5
		Total Acres/Cycle (Cycles 1 & 3)	2,423

The highways and acres listed below comprise the entire tract to be mowed per cycle.

County	Hwy	Limits	No. of Acres Per Cycle Median Only
Morris-	US 259	From: SH 11	16
Upshur		To: SH 155	
Morris- Cass	SH 11	From: US 259 E. Int To SH 11/SH 49 E of Hughes Springs	14
Morris	US 259	From: IH 30 To: SH 11	4
		Total Acres/Cycle (Cycle 2)	34

Sheet 2

Control: 6391-22-001

Sheet 2

Control: 6391-22-001

cle 1 (Cont	tinued)
-------------	---------

Tract 2 – Cycle 2 Median Only

County: Morris, etc.

Control: 6391-22-001

Sheet 2

Highway: FM0161, etc.

Summary Tract 2 - Morris County

Cycle #	Total Area (acres)	Rate (acres/day)	Total Working Days					
1	2,423	100	25					
2	34	100	1					
3	2,423	100	25					
]	Total Acres (Full-Width Mowing) =							
Tota	al Contract Time (Work	(ing Days) =	51					

							E	STIM	ATE		201	MAR	Y			I	T		
										A L		M CODE		DESCRIPTION			U N	ТОТ	AL
EST.	FINAL.		ITEM NO.	DESC. CODE	SP NO.				I T	EST.	FIN								
											730	6055		FULL-WIDTH MOWING	- TRACT (2)		AC	4,880	
										$\left \right $									
										$\left \right $									
										$\left \right $							-+		

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- The Barricade and Construction Standard Sheets (BC sheets) are intended 1. to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the 2. responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop. sign and seal Contractor proposed changes.
- 4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- 5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- 8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the 9. BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- 10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown ON BC(2). THE OBEY WARNING SIGNS STATE LAW sign. STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES. CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, ČSJ limit signs are not required.
- 11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- 12. The Engineer has the final decision on the location of all traffic control devices.
- 13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

- 1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility" Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- 2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.


COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- 1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- 2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov			
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)			
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)			
MATERIAL PRODUCER LIST (MPL)			
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"			
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)			
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)			
TRAFFIC ENGINEERING STANDARD SHEETS			

SHEE	<u> </u>	OF	12				
Texas Department	of Tra	nsp	ortation		- 1	Traff Safe Divisi tand	ty on
BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS BC(1)-21							
FILE: bc-21.dgn	DN: T)	<dot< th=""><th>ск: TxDOT</th><th>DW:</th><th>TxDC</th><th>)Т ск</th><th>: TxDOT</th></dot<>	ск: TxDOT	DW:	TxDC)Т ск	: TxDOT
	CONT	SECT	JOB			HIGHW	
CTxDOT November 2002							ι¥
REVISIONS	6391	22	001		FM	161,	
· · ·		22	001 COUNTY		FM	<u>, </u>	

CUEET 1 05 10

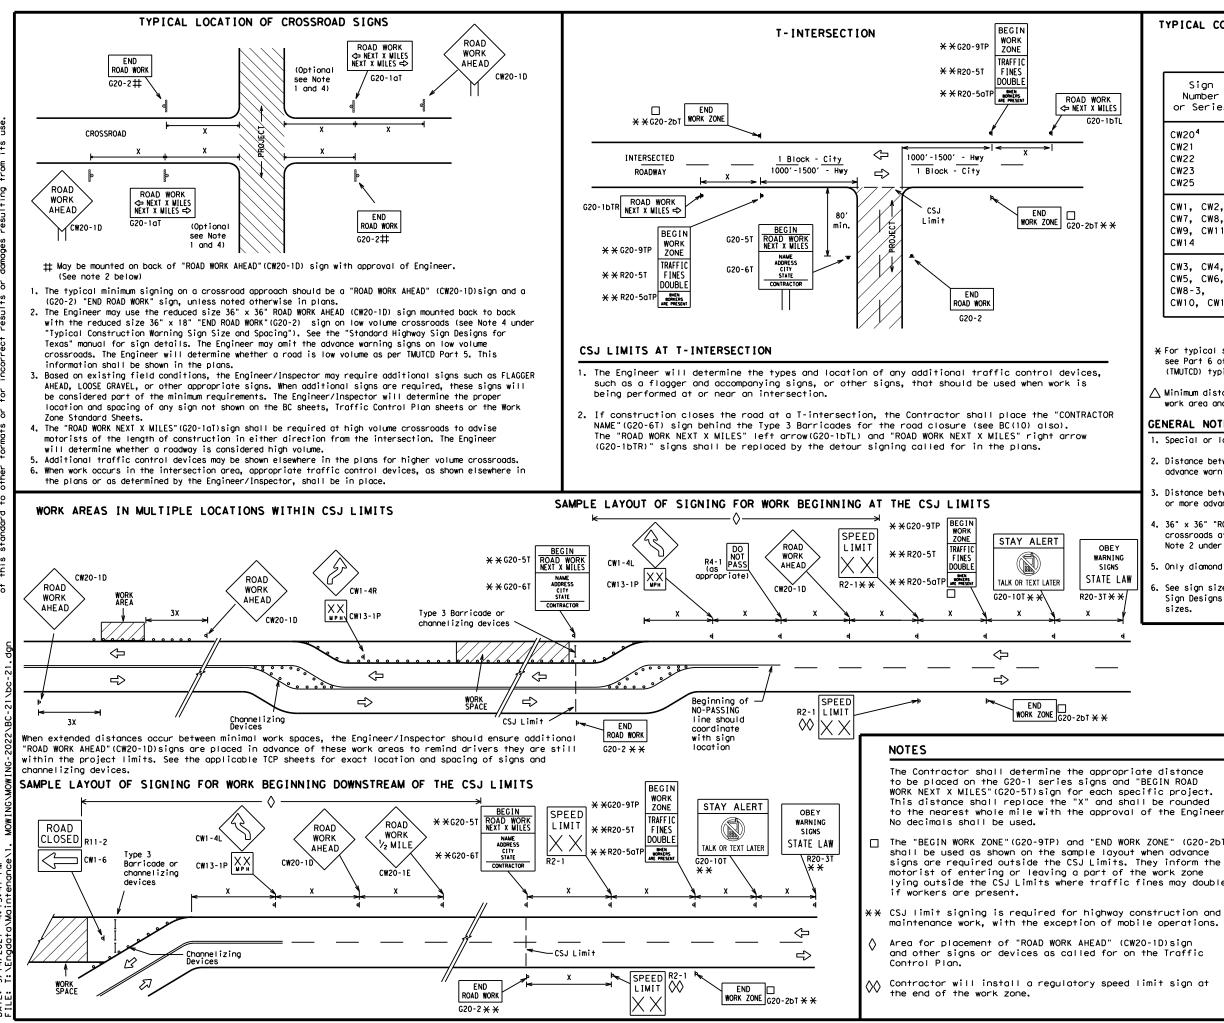

PN 4:15:41 Mointene 2021 9/14 DATE:

TYPICAL	CONSTRUCTION	WARNING	SIGN	SIZE	AND	SPACING ^{1,5,6}

SIZE

Sign Number or Series	Conventional Road	Expressway/ Freeway			
CW20 ⁴ CW21 CW22 CW23 CW25	48" × 48"	48" × 48"			
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" × 36"	48" × 48"			
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" × 48"	48" × 48"			

Posted Speed	Sign∆ Spacing "X"
MPH	Feet (Apprx.)
30	120
35	160
40	240
45	320
50	400
55	500 ²
60	600 ²
65	700 ²
70	800 ²
75	900 ²
80	1000 ²
*	* 3

SPACING

★ For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

ightarrow Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- 1. Special or larger size signs may be used as necessary.
- 2. Distance between signs should be increased as required to have 1500 feet advance warning.
- 3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D)signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- 5. Only diamond shaped warning sign sizes are indicated.

7-13 5-21

6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

			L	EGE	ND				
		ны Туре 3 Barricade							
		000	Chanr	neliz	ing	Devices			
		4	Sign						
		x	Warn Spaci TMUT(ing s ing c CD fo	ign har or s	Construc Size an t or the ign irements	d		
			SHEE	Т 2	OF	12		_	
r.	Te.	🗣 ° xas Depa	rtment o	of Tra	nsp	ortation		Traffic Safety Division tandard	
e	BARF					ONSTR IMIT	UC	TION	
	FILE: [pc-21.dgn	BC) -	21 CK: TXDOT DW:	TxDC)T CK: TxDOT	
	CTXDOT N	November 200)2	CONT	SECT	JOB		HIGHWAY	
	9-07 8	B-14		6391 DIST	22	COUNTY	FM	161, etc. SHEET NO.	

ATL Morris, etc.

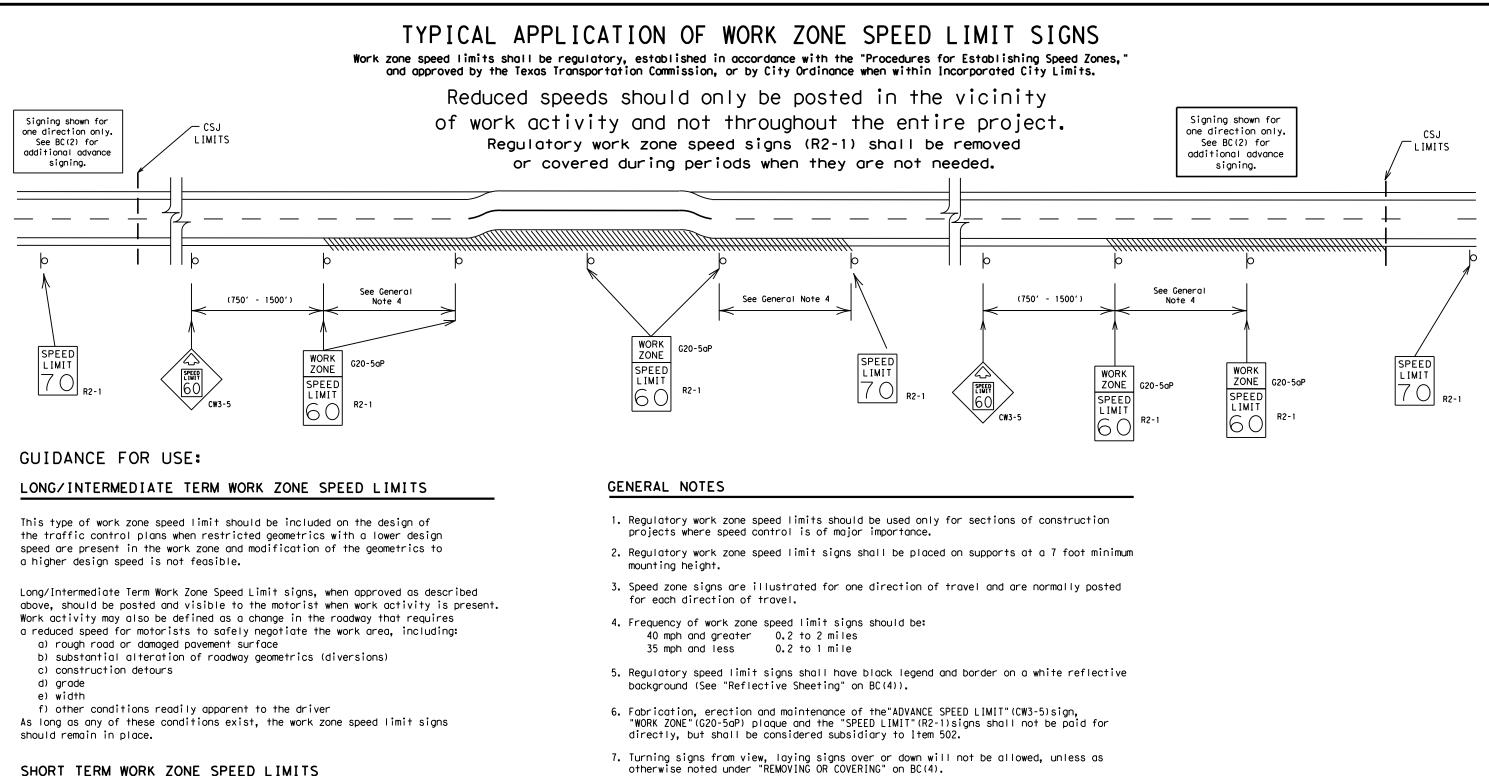


SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

- 8. Techniques that may help reduce traffic speeds include but are not limited to: A. Law enforcement.
 - B. Flagger stationed next to sign.
 - C. Portable changeable message sign (PCMS).
 - D. Low-power (drone) radar transmitter.
 - E. Speed monitor trailers or signs.
- 9. Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- 10. For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

	ET 3 OF			
Texas Department	of Transp	oortation	S D	Traffic Safety ivision andard
BARRICADE A WORK ZONI				
BC	:(3)	-21		
	(3)	- 21	• TxDOT	CK: TXDOT
		CK: TxDOT Dw	1	CK: TXDOT
FILE: bc-21.dgn CTxDOT November 2002 REVISIONS	DN: TXDOT	ск: TxDOT dw Job	ŀ	
FILE: bc-21.dgn © TxDOT November 2002	DN: TXDOT CONT SECT	ск: TxDOT dw Job	ŀ	HIGHWAY

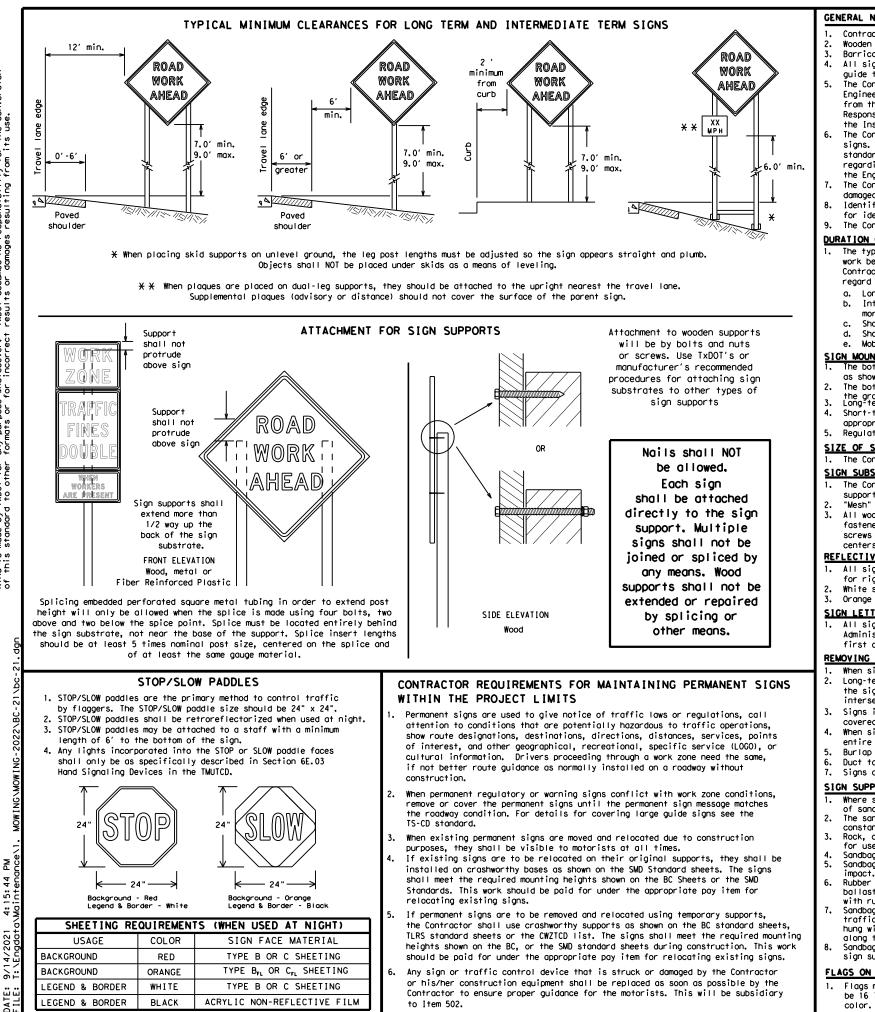

GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer. Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports
- guide the traveling public safely through the work zone.
- the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- the Engineer can verify the correct procedures are being followed.
- damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

<u>DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)</u>

- regard to crashworthiness and duration of work requirements.
- a. Long-term stationary work that occupies a location more than 3 days.
- more than one hour. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
- Short, duration work that occupies a location up to 1 hour.
- Mobile work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

- as shown for supplemental plaques mounted below other signs.
- the ground. Long-term/Intermediate-term Signs may be used in Lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to
- appropriate Long-term/Intermediate sign height.

SIZE OF SIGNS

The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave. centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

- 1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300
- for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- intersections where the sign may be seen from approaching traffic. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely
- covered when not required.
- entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting. Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

- 1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used. The sandbags will be tied shut to keep the sand from spilling and to maintain a
- constant weight. Rock, concrete, iron, steel or other solid objects shall not be permitted
- for use as sign support weights. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular
- impact. Rubber (such as tire inner tubes) shall NOT be used. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and

The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in

The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZICD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a guestion regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so

The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or

Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used

The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in

Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting

The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except

The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above

Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZICD lists each substrate that can be used on the different types and models of sign supports. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6"

White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background. 3. Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of

Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any


When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the

SHEET 4 OF 12

st Texas Department of Transportation Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

		BC	(4) -	21					
ILE:	bc-21.dgn		DN: T>	<dot< td=""><td>ск: TxDOT</td><td>DW:</td><td>TxD</td><td>TC</td><td>ск:</td><td>TxDOT</td></dot<>	ск: TxDOT	DW:	TxD	TC	ск:	TxDOT
C TxDOT	November 2002		CONT	SECT	JOB			HIGHWAY		
	REVISIONS		6391	22	001		FM	161	,	etc.
9-07	8-14		DIST		COUNTY			SH	HEE	T NO.
7-13	5-21		ATL	M	orris,	e†	с.			7
0.0										

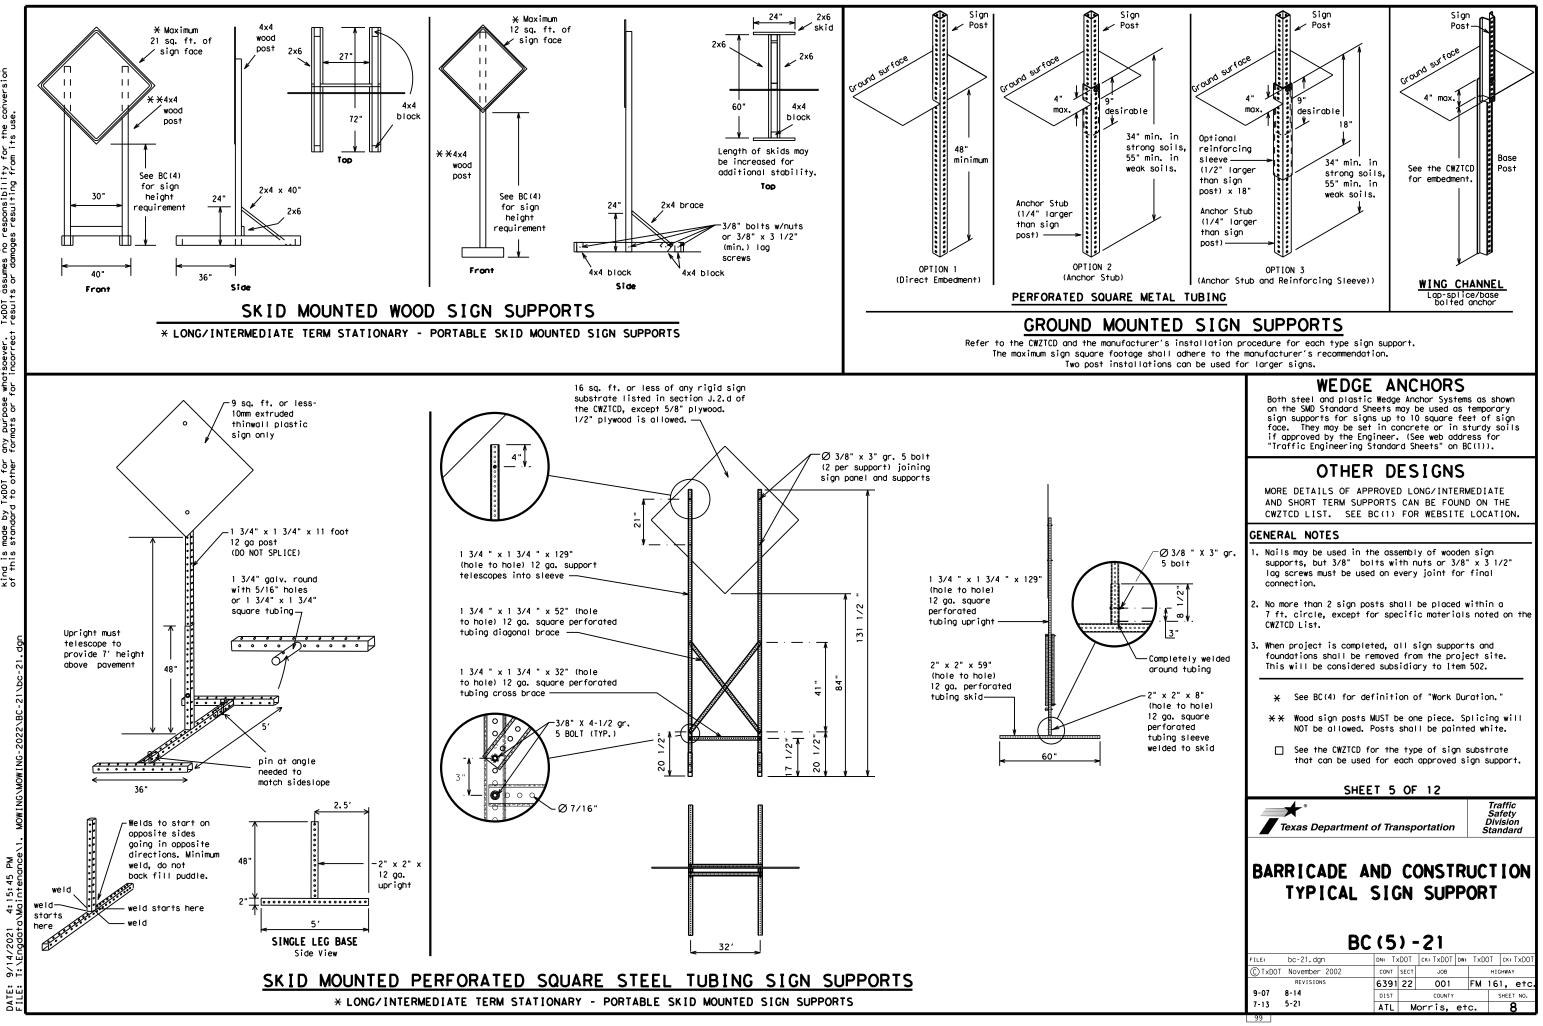

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

PORTABLE CHANGEABLE MESSAGE SIGNS

- 1. The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to 2. eight characters per word), not including simple words such as "TO," "FOR." "AT." etc.
- 3. Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- 4. Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) 5. along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to 7. start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- 10. Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
 Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- 13. Do not display messages that scroll horizontally or vertically across the face of the sign.
- 14. The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together, Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- 15. PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- 16. Each line of text should be centered on the message board rather than left or right justified.
- 17. If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Cannot	CANT	North	N
Center	CTR	Nor thbound	(route) N
Construction Ahead	CONST AHD	Parking Road	PK ING RD
CROSSING	XING	Right Lane	
Detour Route	DETOUR RTE	Saturday	
Do Not	DONT	Service Road	SERV RD
East	E	Shoulder	SHLDR
Eastbound	(route) E	Slippery	SLIP
Emergency	EMER	South	S
Emergency Vehicle	EMER VEH	Southbound	(route) S
Entrance, Enter	ENT	Speed	SPD
Express Lane	EXP LN	Street	ST
Expressway	EXPWY	Sunday	SUN
XXXX Feet	XXXX FT	Telephone	PHONE
Fog Ahead	FOG AHD	Temporary	TEMP
Freeway	FRWY, FWY	Thursday	THURS
Freeway Blocked	FWY BLKD	To Downtown	TO DWNTN
Friday	FRI	Traffic	TRAF
Hazardous Driving	HAZ DRIVING	Travelers	
Hazardous Material		Tuesday	TUES
High-Occupancy	HOV	Time Minutes	TIME MIN
Vehicle	HWY	Upper Level	
Highway		Vehicles (s)	VEH. VEHS
Hour (s)	HR, HRS	Warning	WARN
Information	INFO	Wednesday	WED
lt Is	ITS	Weight Limit	
Junction	JCT	West	
Left	LFT	Westbound	(route) W
Left Lane	LFT LN	Wet Pavement	
Lane Closed	LN CLOSED	Will Not	WONT
Lower Level	LWR LEVEL		
Maintenance	MAINT		

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES (The Engineer may approve other messages not specifically covered here.)

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

		UTTEL CON	
FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED	ROADWORK XXX FT	ROAD REPAIRS XXXX FT
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT	FLAGGER XXXX FT	LANE NARROWS XXXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT	RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
RIGHT X LANES CLOSED	RIGHT X LANES OPEN	MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
CENTER LANE CLOSED	DAYTIME LANE CLOSURES	LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED	DETOUR X MILE	ROUGH ROAD XXXX FT
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE	ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
EXIT CLOSED	RIGHT LN TO BE CLOSED	BUMP XXXX FT	US XXX EXIT X MILES
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI	TRAFFIC SIGNAL XXXX FT	LANES SHIFT X
XXXXXXXX BLVD CLOSED	* LANES SHIFT in Phase	1 must be used wit	th STAY IN LANE in Phos

Other Cor	ndition List
ROADWORK XXX FT	ROAD REPAIRS XXXX FT
FLAGGER XXXX FT	LANE NARROWS XXXX FT
RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
DETOUR X MILE	ROUGH ROAD XXXX FT
ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
BUMP XXXX FT	US XXX EXIT X MILES
TRAFFIC SIGNAL XXXX FT	L ANE S SHIFT

Action to Take/Effect on Travel List MERGE FORM RIGHT X LINES RIGHT DETOUR USE XXXXX NEXT RD EXIT X EXITS USE USE EXIT EXIT XXX I-XX NORTH STAY ON USE US XXX I-XX F SOUTH TO I-XX N TRUCKS WATCH USE FOR US XXX N TRUCKS WATCH EXPECT FOR DELAYS TRUCKS PREPARE EXPECT DELAYS ТΟ STOP REDUCE END SPEED SHOULDER XXX FT USE WATCH USE OTHER FOR ROUTES WORKERS STAY ĪΝ LANE

APPLICATION GUIDELINES

- 1. Only 1 or 2 phases are to be used on a PCMS. 2. The 1st phase (or both) should be selected from the
- "Road/Lane/Ramp Closure List" and the "Other Condition List".
- 3. A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- 4. A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- 5. If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- 6. For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- 1. The words RIGHT, LEFT and ALL can be interchanged as appropriate. 2. Roadway designations IH, US, SH, FM and LP can be interchanged as
- appropriate.
- be interchanged as appropriate.
- 4. Highway names and numbers replaced as appropriate.
- 5. ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- 6. AHEAD may be used instead of distances if necessary. 7. FT and MI. MILE and MILES interchanged as appropriate.
- 8. AT. BEFORE and PAST interchanged as needed.
- 9. Distances or AHEAD can be eliminated from the message if a
- location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC. THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- 1. When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- 2. When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- 4. A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the some size arrow.

Roadway designation # IH-number, US-number, SH-number, FM-number


Phase 2: Possible Component Lists




* * See Application Guidelines Note 6.

XX AM

EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can

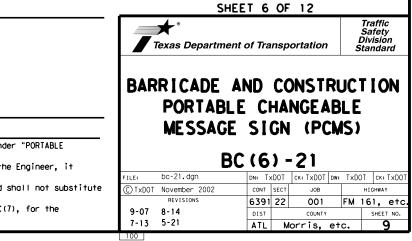

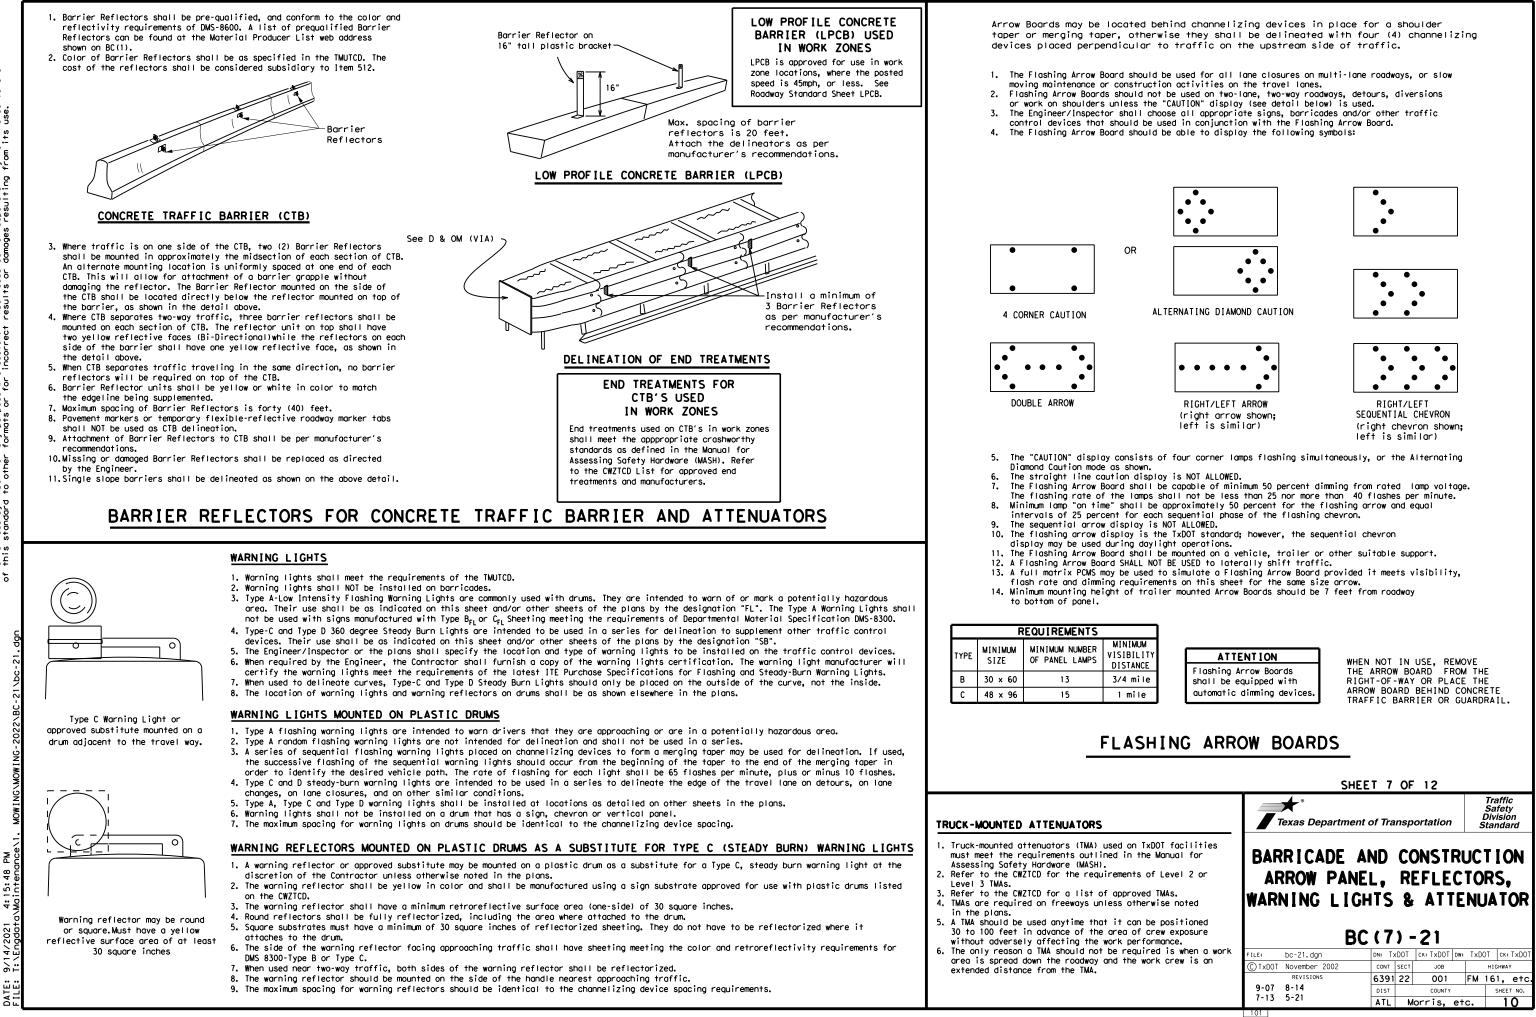

MA 4:15:48 Maintena /2021











GENERAL NOTES

- 1. For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- 2. For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- 3. For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- 4. Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 5. Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- 6. The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS


- Pre-gualified plastic drums shall meet the following requirements:
- 1. Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- 2. The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- 3. Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- 4. Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- 5. The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- 6. The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- 7. Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- 8. Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- 9. Drum body shall have a maximum unballasted weight of 11 lbs.
- 10. Drum and base shall be marked with manufacturer's name and model number.


RETROREFLECTIVE SHEETING

- 1. The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- 2. The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST

- 1. Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- 2. Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- 4. The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- 5. When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- 6. Ballast shall not be placed on top of drums.
- 7. Adhesives may be used to secure base of drums to pavement.

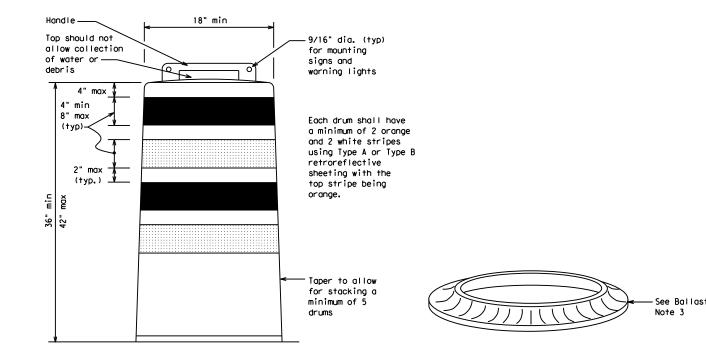




DETECTABLE PEDESTRIAN BARRICADES

- 1. When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures. 2. Where pedestrians with visual disabilities normally use the
- closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- 3. Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian
- 4. Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- 5, Warning lights shall not be attached to detectable pedestrian barricades.
- 6. Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.

ŝē

М 49 15 4: N 2021 1/6 DATE:



(Maximum Sign Dimension)

Chevron CW1-8, Opposing Traffic Lane

Divider, Driveway sign D70a, Keep Right

R4 series or other signs as approved

by Engineer




12" x 24" Vertical Panel mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS


- 1. Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- 2. Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- 3. Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- 4. Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- 5. Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- 6. Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- 7. Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- 8. R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHE	ET 8	OF	12				
Texas Departmen	nt of Tra	nsp	ortation			Trafi Safe Divisi Stand	ty ion
BARRICADE CHANNEL							ON
B	<u>C (8</u>) -	-21				
FILE: bc-21.dgn	DN: T)	<dot< th=""><th>ск: TxDOT</th><th>DW:</th><th>TxD</th><th>OT CH</th><th>• TxDOT</th></dot<>	ск: TxDOT	DW:	TxD	OT CH	• TxDOT
© TxDOT November 2002	CONT	SECT	JOB			HIGHW	ΑY
REVISIONS 4-03 8-14	6391	22	001		FM	161,	etc.
4-03 8-14 9-07 5-21	DIST		COUNTY			SHE	ET NO.
7-13	ATL	M	lorris,	e†	с.		11
102			•				

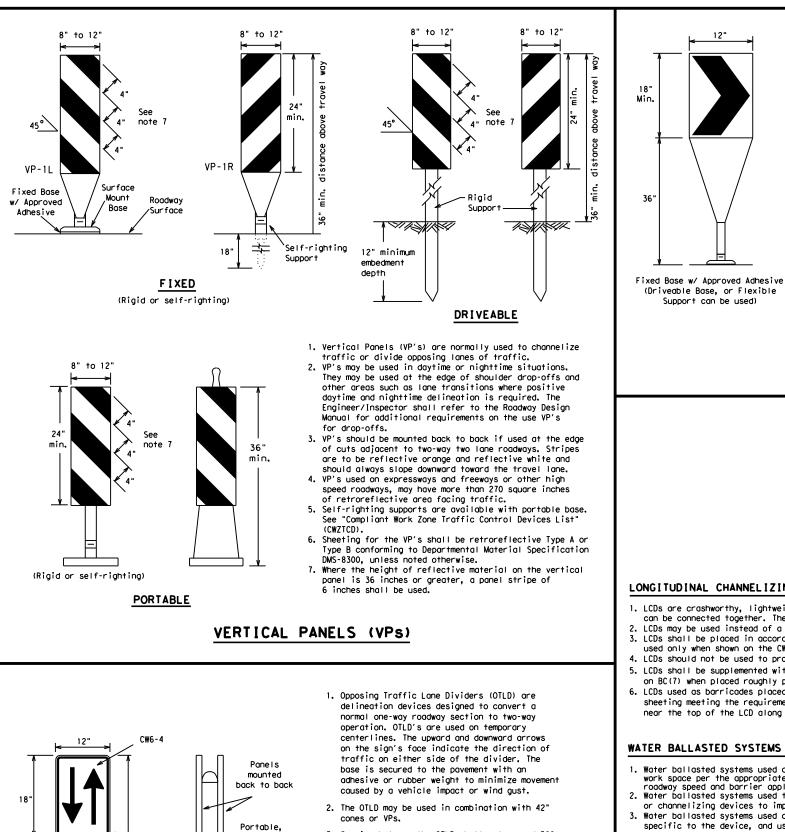

- 1. The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- 2. Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- 3. Chevrons, when used, shall be erected on the out side of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- 4. To be effective, the chevron should be visible for at least 500 feet.
- 5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- 6. For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS



LONGITUDINAL CHANNELIZING DEVICES (LCD)


- 1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- 2. LCDs may be used instead of a line of cones or drums. 3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- 5. LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- 6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- 2. Water ballosted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- 3. Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS



- 3. Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- 4. The OTLD shall be orange with a black nonreflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300. unless noted otherwise. The legend shall meet the requirements of DMS-8300.

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)

Fixed or

Driveable Base

may be used.

or may be

mounted

on drums

Μ 4:15:50 a\Mainterr /2021 9/14

GENERAL NOTES

- 1. Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- 3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- 5. Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- 7. The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	D	Minimur esirab er Lena X X	le gths	Spacin Channe	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	2	150'	1651	180'	30′	60′
35	$L = \frac{WS^2}{60}$	205'	225'	245'	35′	70′
40	60	265'	295′	320'	40′	80′
45		450'	495′	540'	45′	90′
50		500'	550'	600'	50 <i>'</i>	100′
55	L=WS	550'	605′	660 <i>′</i>	55 <i>'</i>	110′
60	L - 11 S	600 <i>'</i>	660 <i>'</i>	720'	60 <i>'</i>	120′
65		650′	715′	780′	65 <i>'</i>	130'
70		700′	770′	840'	70′	140'
75		750'	825′	900'	75′	150'
80		800'	880′	960'	80 <i>'</i>	160'

L=Length of Taper (FT.) W=Width of Offset (FT.) S=Posted Speed (MPH) SUGGESTED MAXIMUM SPACING OF


XX Taper lengths have been rounded off.

CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12 Traffic Safety Division Standard **st** Texas Department of Transportation

BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

		BC	(9) -	·21					
ILE:	bc-21.dgn		dn: T	xDOT	ск: TxDOT	DW:	ΤxD	OT 0	ск:Тх[TO
C) TxDOT	November 2002		CONT	SECT	JOB		HIGHWAY			
	REVISIONS		6391	22	001		FM	161	, e1	·c.
9-07	8-14		DIST		COUNTY			S⊢	IEET NO	١.
7-13	5-21		ATL	M	orris,	e†	с.		12	
103										

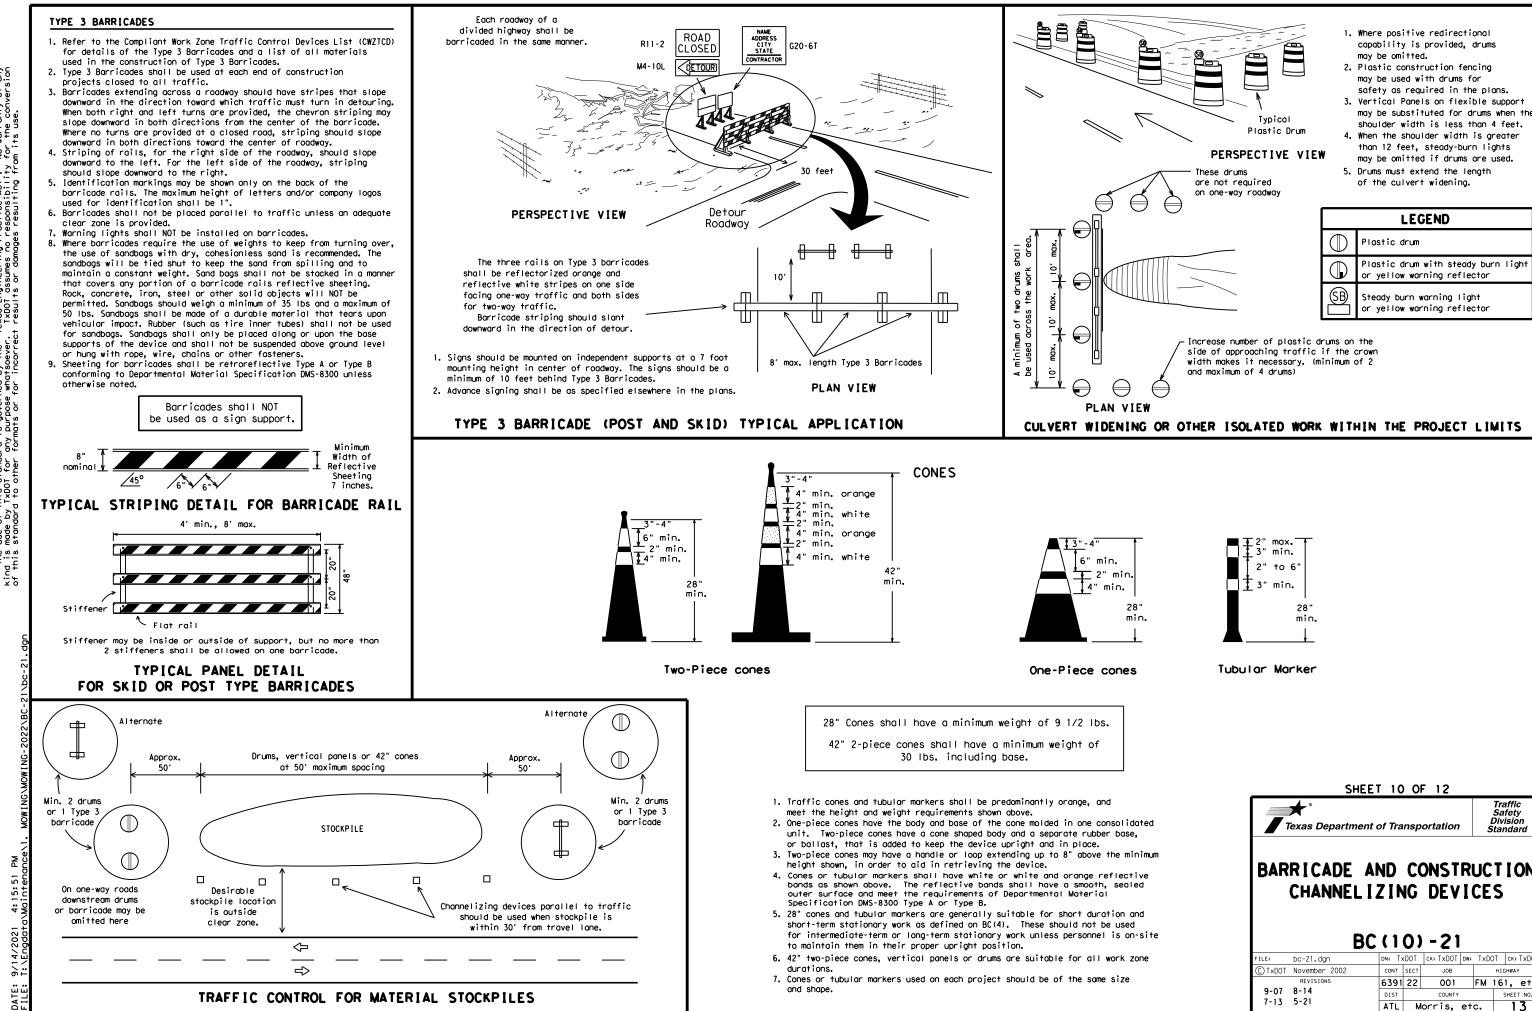

М 15:51 4:1 6

	SHEET	10	0	F 12				
Tex	∽ [®] as Department c	of Tra	nsp	ortation		ċ	Traffi Safet Divisio tanda	y on
	ICADE AN HANNELIZ	ZIN	IG	DEV				ON
FILE: bc) -21	DW:	TxDO	T low	TxDOT
-	-21.dgn vember 2002	CONT	SECT	JOB		1,200	HIGHWA	
F	REVISIONS	6391	22	001		FM	161,	e†c.
	14	DIST		COUNTY			SHEE	T NO.
7-13 5-	21	ATL	M	lorris,	e†¢		1	3

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- 2. Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 3. Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- 5. When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- 6. When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- 1. Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.

MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- 3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- 4. The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- 6. Blast cleaning may be used but will not be required unless specifically shown in the plans.
- 7. Over-painting of the markings SHALL NOT BE permitted.
- 8. Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- 10.Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs



STAPLES OR NAILS SHALL NOT BE USED TO SECU TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARK TABS TO THE PAVEMENT SURFACE

- Temporary flexible-reflective roadway marker tabs used as guider shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by Engineer or designated representative. Sampling and testing is r normally required, however at the option of the Engineer, either or "B" below may be imposed to assure quality before placement or roadway.
 - A. Select five (5) or more tabs at random from each lot or sh and submit to the Construction Division, Materials and Pay Section to determine specification compliance.
 - B. Select five (5) tabs and perform the following test. Affix (5) tabs at 24 inch intervals on an asphaltic pavement in straight line. Using a medium size passenger vehicle or pi run over the markers with the front and rear tires at a sp of 35 to 40 miles per hour, four (4) times in each directi more than one (1) out of the five (5) reflective surfaces be lost or displaced as a result of this test.
- 3. Small design variances may be noted between tab manufacturers.
- 4. See Standard Sheet WZ(STPM) for tab placement on new pavements. Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARK

- Raised pavement markers used as guidemarks shall be from the approduct list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applie butyl rubber pad for all surfaces, or thermoplastic for concresurfaces.

Guidemarks shall be designated as:

YELLOW - (two amber reflective surfaces with yellow body). WHITE - (one silver reflective surface with white body).


PN

4:15:53 Maintena

9/14/

DATE:

	DEPARTMENTAL MATERIAL SPECIFICATIO	
	PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
	TRAFFIC BUTTONS	DMS-4300
IEW	EPOXY AND ADHESIVES	DMS-6100
57	BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
	PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
	PAVEMENT MARKINGS	DMS-8241
*	TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242
ve pod	A list of prequalified reflective raised pavement non-reflective traffic buttons, roadway marker tab	
2	web address shown on BC(1).	
ks		
ne t "A"		
the oment ment		
five kup, ed n. No ng H		
e		
oved		
or		
	SHEET 11 OF 12	Troffia
	SHEET IT OF 12	Traffic Safety Division
	Texas Department of Transportation	
	* *	Safety Division
	Texas Department of Transportation	Safety Division Standard
	BARRICADE AND CONSTR	Safety Division Standard
	Texas Department of Transportation	Safety Division Standard
	BARRICADE AND CONSTR	Safety Division Standard
	Texas Department of Transportation	Safety Division Standard
	BARRICADE AND CONSTR	Safety Division Standard
	Texas Department of Transportation BARR I CADE AND CONSTRUCT PAVEMENT MARK INC BC (111) - 21 FILE: bc-21. dgn [C] TXDOT February 1998 CONT SECT	Safety Division Standard UCTION SS
	Texas Department of Transportation BARR I CADE AND CONSTRUCT PAVEMENT MARK INC BC (111) - 21 FILE: bc-21. dgn DN: TxDOT CK: TXDOT	Safety Division Standard

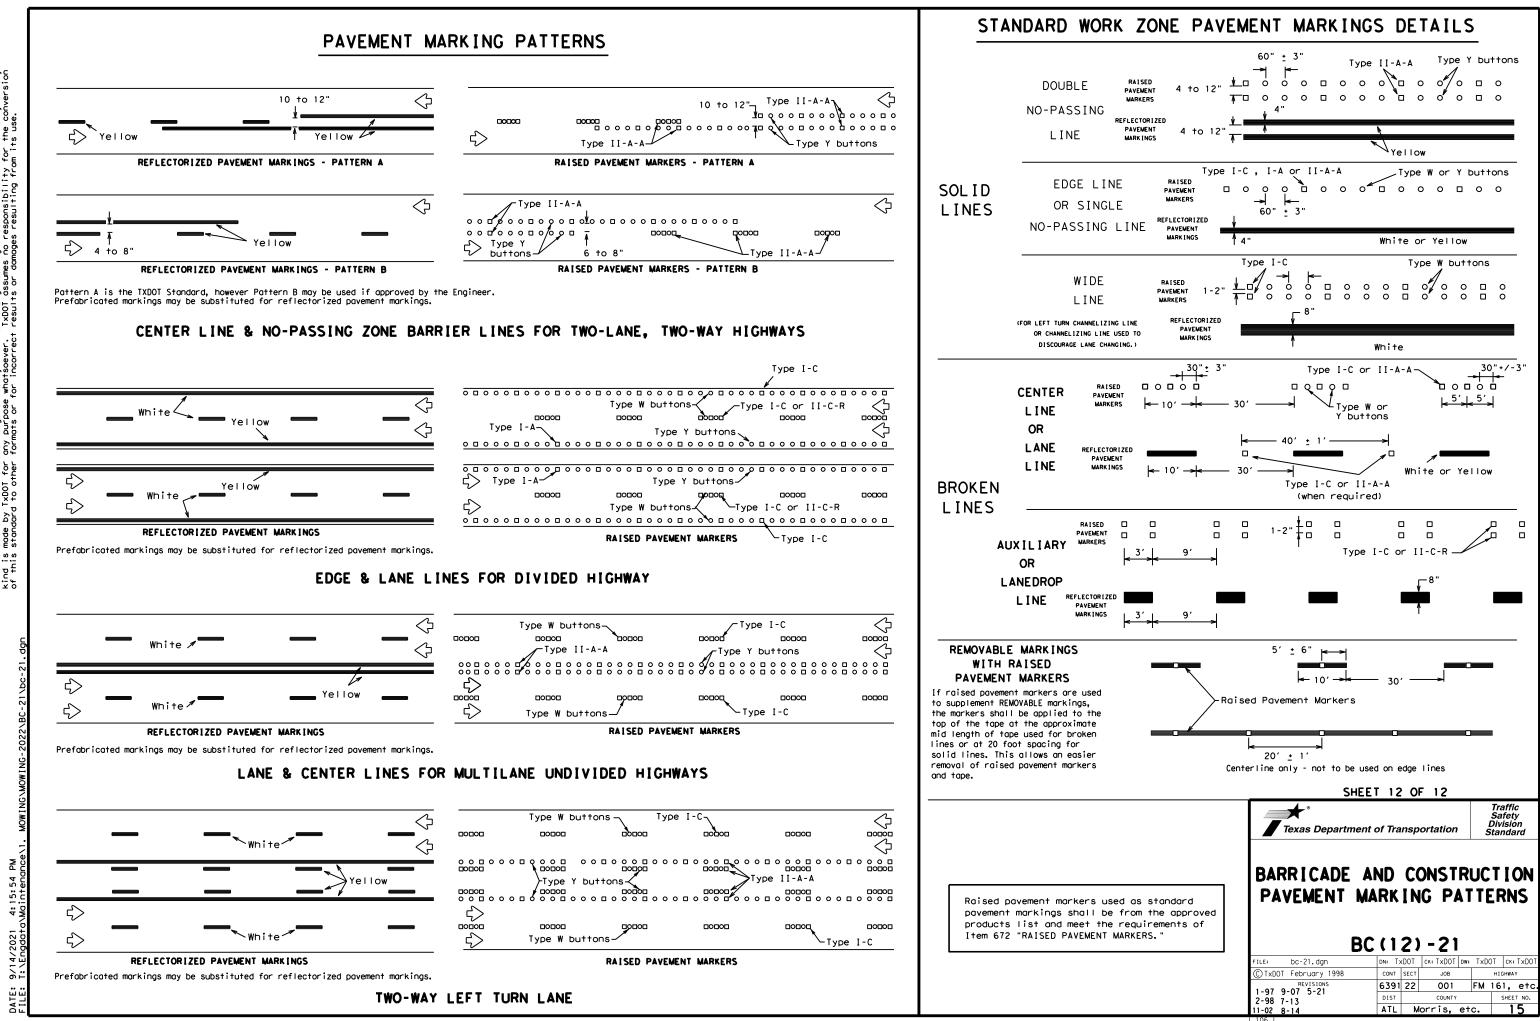

SITE DESCRIPTION)N
------------------	----

PROJECT	LIMITS:	VARIOUS	LOCATIONS	WHITIN	THE	ATLANTA	DISTRIC

PROJECT DESCRIPTION: CONSISTING OF MOWING OF HIGHWAY RIGHT OF WAY.

MAJOR SOIL DISTURBING ACTIVITIES: None

NAME	OF	RECEIVING	WATERS:	N/A

TOTAL PROJECT AREA: None

TOTAL AREA TO BE DISTURBED: None

EXISTING CONDITION OF SOIL & VEGETATIVE

COVER AND % OF EXISTING VEGETATIVE COVER: THE COVERAGE IS EXCELLENT WITH 100%

COVERAGE WITH NATIVE GRASSES AND VARIOUS TREES.

ANTICIPATED EFFECT OF STORM WATER ON THREATENED AND ENDANGERED SPECIES AND WILDLIFE HABITAT: PLEASE REFER TO EPIC SHEET

CHANNEL LINERS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER:		, OT
		мат
SOIL RETENTION BLANKET BUFFER ZORES PRESERVATION OF NATURAL RESOURCES SLOPE TEXTURING OTHER: DUTURAL PRACTICES: SILT FENCES HAY BALES ROCK BERNS DUVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION UNER SEDIMENT TRAP STORM SEMENS STORM SEMENS UVELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: ATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL BEAS FOLLOWS: I. THE CONTRACTOR SHALL BEAS AFOLOWS: I. THE CONTRACTOR SHALL BEAS AFOLOWS: I. THE CONTRACTOR SHALL BE AS AESONS CONTROL MEASURES, AS DIRECTED, MANTANING APPEOPRIATE ROSION CONTROL MEASURES. AS DIRECTED, MANTANING APPEOPRIATE ROSION CONTROL MEASURES AS DIRECTED, MANTANING APPEOPRIATE ROSION CONTROL MEASURES, AS DIRECTED, MANTANING APPEOPRIATE REDSION ONTROL MEASURES, AS DIRECTED, MANTANING APPEOPRIATE REDSION CONTROL MEASURES, AS DIRECTED, MANTANING APPEOPRIATE REDSION CONTROL MEASURES, AS DIRECTED, MANTANING APPEOPRIATE REDSION ONTROL MEASURES, AS DIRECTED, MANTANING APPEOPRIATE REDSION AD SULTATION MEASURES. J. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED, DISTURBED AREAS FROM	PERMANENT PLANTING, SODDING, OR SEEDING	
BUFFER ZONES PRESERVATION OF NATURAL RESOURCES SLOPE TEXTURING OTHER: OTHER: SUCTURAL PRACTICES: SILT FENCES HAY BALES ROCK BERNS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION TARE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS SEDIMENTION SEDIMENT TRAPS SEDIMENT TRAPS	MULCHING	
PRESERVATION OF NATURAL RESOURCES SLOPE TEXTURING OTHER: SILPE TEXTURING WUCTURAL PRACTICES: SILT FENCES HAY BALES DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION DIX AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT ROCK BEDDING AT CONSTRUCTION EXIT CRANNEL LINERS STORM INLET SEDIMENT TRAP SION INLET SEDIMENT TRAP SION INLET SEDIMENT TRAP SION SWEENS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL ER AS FOLIOWS; I. THE CONTRACTOR SHALL MSTAL EROSION CONTROL MEASURES, AS DIRECTED, MANDATIVES WILL BE AS FOLIOWS; I. THE CONTRACTOR SHALL MSTAL EROSION CONTROL MEASURES, AS DIRECTED, MANDATIVES WILL BE AS FOLIOWS; J. THE ONTRACTOR SHALL MSTAL EROSION MONTROL MEASURES, AS DIRECTED, MANDATIVE FOLIOWING ANY PREMINIARY WORK WHICH DISTURBS EXISTING SOUL. MANDATIVE APPROPRIATE EROSION CONTROL MEASURES; STORM MADE APPROPRIATE EROSION MASURES WILL BE AS APPROVED, DISTURBED AREAS FROM		
SLOPE TEXTURING OTHER: SILT FENCES SILT FENCES SILT FENCES HAY BALES DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION DIVE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT TIMBER MATTING AT CONSTRUCTION EXIT CHANNEL LINERS SSTOM STRUET TRAPS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL DEVICES EROSION CONTROL DEVICES EROSION CONTROL DEVICES EROSION CONTROL LOGS OTHER: COMPACTION SHALL ENCOUNDS. ALTINE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL ERAS FOLLOWS: I. THE CONTRACTOR SHALL MATAL EROSION CONTROL MEASURES, AS DIRECTED. MANDATELY FOLLOWING ANT SHALL EROSION AND SLITATOM MEASURES. AS DIRECTED. MANDATELY FOLLOWING AND SLITATOM MEASURES. AS DIRECTED. MANDATELY FOLOWING AND SLITATOM MEASURES. AS DIRECTED. MANDATELY FOLOWING AND SLITATOM MEASURES. AS DIRECTED. MANDATELY FOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTANIA PAPADATIAN MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	BUFFER ZONES	
OTHER:	PRESERVATION OF NATURAL RESOURCES	
WUCTURAL PRACTICES: SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION DIKE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS CURBS AND GUTTERS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS; I. THE CONTRACTOR SHALL MESTALL EROSON CONTROL MEASURES, AS DIRECTED. MANDALATELY FOLLOWING ANY PROVING WHICH OISTURES EXISTING SOLL REAMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH OISTURES EXISTING SOLL Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTFYING, PREVENTING AND MANTANING APPROPRIATE EROSON AND SILTATION MEASURES. S. REMOVAL OF EROSIGN CONTROL MEASUR	SLOPE TEXTURING	
WUCTURAL PRACTICES: SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION DIKE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS CURBS AND GUTTERS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS; I. THE CONTRACTOR SHALL MESTALL EROSON CONTROL MEASURES, AS DIRECTED. MANDALATELY FOLLOWING ANY PROVING WHICH OISTURES EXISTING SOLL REAMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH OISTURES EXISTING SOLL Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTFYING, PREVENTING AND MANTANING APPROPRIATE EROSON AND SILTATION MEASURES. S. REMOVAL OF EROSIGN CONTROL MEASUR		
SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUITERS STORM SEMENS STORM SEMENS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SAL OTHER: SAL OFI SAL OFI SAL COTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. INMEDIATELY FOLLOWIG ANY PRELIMINARY WORK WHICH DISTURES EXISTING SOL. Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTAINING APPROPRIATE EROSION AND SILTATION MEASURES. J. REMOMAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED.	OTHER:	
SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUITERS STORM SEMENS STORM SEMENS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SAL OTHER: SAL OFI SAL OFI SAL COTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. INMEDIATELY FOLLOWIG ANY PRELIMINARY WORK WHICH DISTURES EXISTING SOL. Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTAINING APPROPRIATE EROSION AND SILTATION MEASURES. J. REMOMAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED.		
SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUITERS STORM SEMENS STORM SEMENS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SAL OTHER: SAL OFI SAL OFI SAL COTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. INMEDIATELY FOLLOWIG ANY PRELIMINARY WORK WHICH DISTURES EXISTING SOL. Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTAINING APPROPRIATE EROSION AND SILTATION MEASURES. J. REMOMAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED.		
SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUITERS STORM SEMENS STORM SEMENS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SAL OTHER: SAL OFI SAL OFI SAL COTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. INMEDIATELY FOLLOWIG ANY PRELIMINARY WORK WHICH DISTURES EXISTING SOL. Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTAINING APPROPRIATE EROSION AND SILTATION MEASURES. J. REMOMAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED.		
SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUITERS STORM SEMENS STORM SEMENS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SAL OTHER: SAL OFI SAL OFI SAL COTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. INMEDIATELY FOLLOWIG ANY PRELIMINARY WORK WHICH DISTURES EXISTING SOL. Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTAINING APPROPRIATE EROSION AND SILTATION MEASURES. J. REMOMAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED.		
SILT FENCES HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUITERS STORM SEMENS STORM SEMENS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SAL OTHER: SAL OFI SAL OFI SAL COTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. INMEDIATELY FOLLOWIG ANY PRELIMINARY WORK WHICH DISTURES EXISTING SOL. Z. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTAINING APPROPRIATE EROSION AND SILTATION MEASURES. J. REMOMAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED.		
HAY BALES ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION DIKE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEMERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: ATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: ATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: IN THE CONTRACTOR SHALL MISTAL EROSION CONTROL MEASURES, AS DIRECTED. IN THE CONTRACTOR SHALL BE AS FEONOMAD SULTATION MEASURES. REM <td></td> <td></td>		
ROCK BERMS DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION, DIKE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT TIMBER MATTING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP CURBS AND GUTTERS STORM SEWERS OUTROL DEVICES	SILT FENCES	
DIVERSION, INTERCEPTOR, OR PERIMETER DIKES DIVERSION, INTERCEPTOR, OR PERIMETER SWALES PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTERS STORM SEWERS VELOCITY CONTROL DEVICES E ROSION CONTROL LOGS OTHER:		
DIVERSION, INTERCEPTOR, OR PERIMETER SWALES DIVERSION DIKE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS; I. THE CONTRACTOR SHALL INSALL EROSION CONTROL MEASURES, AS DIRECTED, IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SULTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED, DISTURBED AREAS FROM	ROCK BERMS	
DIVERSION DIKE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT TIMBER MATTING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: CURBS AND GUTTERS STORM SEWERS OTHER: COURDS CONTROL LOGS OTHER: COUTHER: COURDS CONTROL LOGS OTHER: COUTHER: COUTHER: COUTH CONTROL DOS OTHER: COUTH CONTROL DOSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ONDER OF ACTIVITIES WILL BE AS FOLLOWS: THE ONDER OF ACTIVITIES WILL BE AS FOLLOWS		
DIVERSION DIKE AND SWALE COMBINATIONS PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT TIMBER MATTING AT CONSTRUCTION EXIT CHANNEL LINERS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: CURBS AND GUTTERS STORM SEWERS OTHER: COURDS CONTROL LOGS OTHER: COUTHER: COURDS CONTROL LOGS OTHER: COUTHER: COUTHER: COUTH CONTROL DOS OTHER: COUTH CONTROL DOSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ONDER OF ACTIVITIES WILL BE AS FOLLOWS: THE ONDER OF ACTIVITIES WILL BE AS FOLLOWS		
PAVED FLUMES PAVED FLUMES ROCK BEDDING AT CONSTRUCTION EXIT TIMBER MATINES AT CONSTRUCTION EXIT WAS CHANNEL LINERS SEDIMENT TRAPS SEDIMENT TRAPS HAZ FILTER DAMS HAZ CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER:		
CHANNEL LINERS SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: STORM SEWERS VELOCITY CONTROL LOGS OTHER: SAI THE ORDER OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MANTANING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED, DISTURBED AREAS FROM		WAS
SEDIMENT TRAPS STORM INLET SEDIMENT TRAP FILTER DAMS CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS SAM OTHER: SAM OTHER: SAM GURDS AND CONTROL LOGS SAM OTHER: SAM GURDS CONTROL LOGS SAM OTHER: SAM STORM SEWERS SAM STORM SEWERS SAM OTHER: SAM STORM SEWERS SAM STORM SEWERS SAM OTHER: SAM STORM SEWERS SAM		
FILTER DAMS HAZ CURBS AND GUTTERS STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER: SAI OTHER: SAI OTHER: SAI OFI SAI Image: Several severa several several several several several several seve		
		HAZ
STORM SEWERS VELOCITY CONTROL DEVICES EROSION CONTROL LOGS OTHER:		
EROSION CONTROL LOGS SAI OTHER:		
OTHER: SAM OFH OFH OFH <t< td=""><td></td><td></td></t<>		
OFILE OFI OFI OFI COLUMN COLUMN RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: COLUMN THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. COLUMNEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND REM MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. SAPPROVED. DISTURBED AREAS FROM		
OFILE OFI OFI OFI COLUMN COLUMN RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: COLUMN THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. COLUMNEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND REM MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. SAPPROVED. DISTURBED AREAS FROM		
OFILE OFI OFI OFI COLUMN COLUMN RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: COLUMN THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. COLUMNEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND REM MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. SAPPROVED. DISTURBED AREAS FROM	ATUED.	SAN
CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES.		
CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES.		
CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES.		
CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES.		
CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES.		
RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
RATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES: THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	ATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES:	COM
IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM		
2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS:	
MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: 1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED.	
MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: 1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED.	
3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: I. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL.	
	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: 1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND	
	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: 1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND	
NEWOYAL OHALL DE SELUEU ADANT.	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: 1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES.	
	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: 1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	
	THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS: 1. THE CONTRACTOR SHALL INSTALL EROSION CONTROL MEASURES, AS DIRECTED. IMMEDIATELY FOLLOWING ANY PRELIMINARY WORK WHICH DISTURBS EXISTING SOIL. 2. THE CONTRACTOR SHALL BE A RESPONSIBLE PARTY IN IDENTIFYING, PREVENTING AND MAINTAINING APPROPRIATE EROSION AND SILTATION MEASURES. 3. REMOVAL OF EROSION CONTROL MEASURES WILL BE AS APPROVED. DISTURBED AREAS FROM	

AND STRUCTURES. THE CURRENT SYSTEM PROVIDES ADEQUATE DRAINAGE WITHIN RIGHT-OF-WAY LIMITS.

HICLE TRACKING: IAUL ROADS DAMPENED FOR DUST CONTROL OADED HAUL TRUCKS TO BE COVERED WITH TARPAULIN XCESS DIRT ON ROAD REMOVED DAILY STABILIZED CONSTRUCTION ENTRANCE RUCK WASHOUT AREAS: THE CONTRACTOR WILL BE REQUIRED TO CONTAIN WASH WATER ONCRETE TRUCKS.

EROSION AND SEDIMENT CONTROLS

	The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any	kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion	of this standard to other formats or for incorrect results or damages resulting from its use.	
	standard is	xDOT for an	to other fo	
MER	e of this s	s made by T	standard standard	
DISCLAIMER	The use	kind is	of this	

201

ILE:

ROSION AND SEDIMENT CONTROLS:

E: ALL EROSION AND SEDIMENT CONTROLS WILL BE MAINTAINED IN GOOD WORKING ORDER. TENANCE IS NECESSARY, IT WILL BE DONE PRIOR TO THE NEXT RAIN EVENT IF FEASIBLE. TENANCE PRIOR TO THE NEXT ANTICIPATED STORM EVENT IS IMPRACTICABLE. THE ANCE MUST BE SCHEDULED AND ACCOMPLISHED AS SOON AS PRACTICABLE. EROSION DIMENT CONTROLS THAT HAVE BEEN INTENTIONALLY DISABLED, RUN-OVER, REMOVED ERWISE RENDERED INEFFECTIVE MUST BE REPLACED OR CORRECTED IMMEDIATELY SCOVERY.

ECTION AND MAINTENANCE REPORT WILL BE MADE PER EACH INSPECTION. BASED ON ION RESULTS, THE CONTROLS SHALL BE REVISED PER THE INSPECTION REPORT.

RIALS: NO CONSTRUCTION WASTE MAT'L. WILL BE BURIED ON SITE. DISPOSAL OF WASTE ALS SHALL MEET ALL STATE AND LOCAL SOLID WASTE MANAGEMENT REGULATIONS.

WASTE (INCLUDING SPILL REPORTING): AT A MINIMUM, ANY PRODUCTS IN THE ING CATEGORIES ARE CONSIDERED TO BE HAZARDOUS: PAINTS, ACIDS FOR CLEANING MASONRY ES. CLEANING SOLVENTS. ASPHALT PRODUCTS. CHEMICAL ADDITIVES FOR SOIL STABILIZATION. TE CURING COMPOUNDS AND ADDITIVES OR MOTOR OIL. IN THE EVENT OF A SPILL WHICH HAZARDOUS, THE DEPARTMENT OF PUBLIC SAFETY SHOULD BE CONTACTED IMMEDIATELY.

ASTE: ALL SANITARY WASTE WILL BE DISPOSED OF IN ACCORDANCE WITH ALL STATE AND REGULATIONS.

ISPOSAL AREAS, STOCKPILES, AND HAUL ROADS SHALL BE CONSTRUCTED IN A MANNER THAT VIMIZE AND CONTROL THE AMOUNT OF SEDIMENT THAT MAY ENTER RECEIVING WATERS. AL AREAS SHALL NOT BE LOCATED IN ANY WETLAND, WATERBODY OR STREAMBED. TRUCTION STAGING AREAS AND VEHICLE MAINTENANCE AREAS SHALL BE CONSTRUCTED BY NTRACTOR IN A MANNER TO MINIMIZE THE RUNOFF OF POLLUTANTS. VATERWAYS SHALL BE CLEARED AS SOON AS PRACTICAL OF TEMPORARY EMBANKMENT. ARY BRIDGES, MATTING FALSEWORK, PILING, DEBRIS OR OTHER OBSTRUCTIONS PLACED CONSTRUCTION OPERATIONS THAT ARE NOT A PART OF THE FINISHED WORK. NOTES: THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT ALL SUBCONTRACTORS ARE AWARE OF AND COMPLY WITH ALL COMPONENTS OF THE SWP3. REVISION HISTORY Texas Department of Transportation / 07 ADDED EROSION CONTROL LOGS & L/@1998 REMOVED PIPE SLOPE DRAINS TXDOT STORM WATER 10/ 07 REMOVED INSPECTION TYPE POLLUTION PREVENTION 02/ 08 ADDED MS4 OPERATORS SLOPE TEXTURING PLAN (SWP3) SEDIMENTATION BASIN CONCRETE TRUCK WASH OUT MODIFIED MAINT. NOTE (Less than one acre) 08 MODIFIED SHEET FOR PROJECTS < ONE ACRE CK: DW: СК: NEG DIST FED REG ORIG DATE: PROJECT SHEET REVISIONS ATL 6 RMC 6391-22-001 16 COUNTY CONTROL SECT JOB HIGHWA Morris, etc. 6391 22 001 FM 161. etc

				1			
т.	STORMWATER POLLUTION F	PREVENTION-CLEAN WATER	ACT SECTION 402	111.	CULTURAL RESOURCES		VI. HAZARDOUS
TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres distrubed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506. List MS4 Operator(s) that may receive discharges from this project.					General (ap Comply with the hazardous materi making workers of provided with pe		
		ed prior to construction act	-		🗙 No Action Required	Required Action	Obtain and keep used on the proj
	1. There are no MS4 Operators in	n the project area.			Action No.		Paints, acids, s
	No Action Required	Required Action			ACTION NO.		products which m
	Action No.				1.		Maintain an adec In the event of
	1. The project disturbs less the	in one acre of surface area. The	contractor		2.		in accordance wi
	is responsible for the PSL as Construction and Maintenance	defined in the Standard Specific of Highways, Streets, and Bridges	ations for 6 (2004 Edition,		3.		immediately. The of all product s
	to be disturbed on the project	he total disturbed acreage is the and the contractors PSL.	complined acreage		4.		Contact the Engi * Dead or di
	Commitment No.						* Trash pile * Undesirabl
	2. Defer to the SW2D Dies Sheet		an amandan abartant	IV.	VEGETATION RESOURCES		* Evidence o
	•	BMPs, and Detail. It will addre all other management practices.	ss sweeping, cnemical		Preserve native vegetation to	the extent practical.	Does the pro replacements Yes
					No Action Required	Required Action	If "No", the
					Action No.		If "Yes", the Are the resu
					1.		Yes
	ACT SECTIONS 401 AND		ETLANDS CLEAN WATER		2		If "Yes", th
		filling, dredging, excavati	ng or other work in any		2.		the notifica activities as
		eks, streams, wetlands or we			3.		15 working de
	The Contractor must adhere the following permit(s):	e to all of the terms and co	onditions associated with		4.		If "No", the
	····· · · · · · · · · · · · · · · · ·						scheduled den In either cas
	No Permit Required Nationwide Permit 14 - wetlands affected)	PCN not Required (less than	1/10th acre waters or	v.		THREATENED, ENDANGERED SPECIES, ISTED SPECIES, CANDIDATE SPECIES	activities ar asbestos cons Any other evi on site, Haz
	🗌 Nationwide Permit 14 -	PCN Required (1/10 to <1/2	acre, 1/3 in tidal waters)				No Act
	🗌 Individual 404 Permit F —				🛛 No Action Required	Required Action	
	Other Nationwide Permit	Required: NWP#			Action No.		Action No.
		ers of the US permit applies Practices planned to control			1.		2.
	1.				2.		3. VII. OTHER EN
	2.						(includes
		ary high water marks of any ers of the US requiring the Bridge Layouts.	-		3.		Action No.
	Best Management Practic	ces:				served, cease work in the immediate area, nd contact the Engineer immediately. The	2.
	Erosion	Sedimentation	Post-Construction TSS	wor	rk may not remove active nests fr	om bridges and other structures during	
1	Temporary Vegetation	Silt Fence	Vegetative Filter Strips		sting season of the birds associa e discovered, cease work in the i	ted with the nests. If caves or sinkholes mmediated area, and contact the	3.
1	Blankets/Matting	Rock Berm	Retention/Irrigation Systems	Eng	gineer immediately.		
1	Mulch	🗌 Triangular Filter Dike	Extended Detention Basin				
Í	Sodding	Sand Bag Berm	Constructed Wetlands		LIST OF AB	BREVIATIONS	
1	☐ Interceptor Swale	Straw Bale Dike	Wet Basin		Best Management Practice	SPCC: Spill Prevention Control and Countermeasure	
Í	Diversion Dike Erosion Control Compost	Brush Berms Erosion Control Compost	Erosion Control Compost Mulch Filter Berm and Socks	DSHS:	Construction General Permit Texas Department of State Health Service Federal Withway Athioistration		
Í	Mulch Filter Berm and Socks	Mulch Filter Berm and Socks	Compost Filter Berm and Socks	MOA: I	Federal Highway Administration Vemorandum of Agreement	PSL: Project Specific Location TCEO: Texas Commission on Environmental Quality	
Í		s 🗌 Compost Filter Berm and Sock		MS4: 1		TPDES: Texas Pollutant Discharge Elimination System em TPWD: Texas Parks and Wildlife Department	
		Stone Outlet Sediment Traps	Sand Filter Systems	NOT: I	Vigratory Bird Treaty Act Notice of Termination Nationwide Permit Nation of Intent	TxDOT: Texas Department of Transportation T&L: Threatened and Endangered Species USACE: U.S. Army Corp of Engineers	
		_			Notice of Intent	USFWS: U.S. Fish and Wildlife Service	

US MATERIALS OR CONTAMINATION ISSUES

(applies to all projects):

The Hazard Communication Act (the Act) for personnel who will be working with the rials by conducting safety meetings prior to beginning construction and a ware of potential hazards in the workplace. Ensure that all workers are personal protective equipment appropriate for any hazardous materials used. (the pon-site Material Safety Data Sheets (MSDS) for all hazardous products roject, which may include, but are not limited to the following categories: solvents, asphalt products, chemical additives, fuels and concrete curing additives. Provide protected storage, off bare ground and covered, for a may be hazardous. Maintain product labelling as required by the Act.

dequate supply of on-site spill response materials, as indicated in the MSDS. of a spill, take actions to mitigate the spill as indicated in the MSDS, with safe work practices, and contact the District Spill Coordinator The Contractor shall be responsiblefor the proper containment and cleanup spills.

ngineer if any of the following are detected: distressed vegetation (not identified as normal) les, drums, canister, barrels, etc. able smells or odors e of leaching or seepage of substances

roject involve any bridge class structure rehabilitation or

ts (bridge class structures not including box culverts)?

No No

then no further action is required. then TxDOT is responsible for completing asbestos assessment/inspection.

sults of the asbestos inspection positive (is asbestos present)?

then TxDOT must retain a DSHS licensed asbestos consultant to assist with cation, develop abatement/mitigation procedures, and perform management as necessary. The notification form to DSHS must be postmarked at least days prior to scheduled demolition.

then TxDOT is still required to notifiy DSHS 15 working days prior to any demolition.

case, the Contractor is responsible for providing the date(s) for abatement and/or demolition with careful coordination between the Engineer and posultant in order to minimize construction delays and subsequent claims.

evidence indicating possible hazardous materials or contamination discoverd Mazardous Materials or Contamination Issues Specific to this Project:

Action Required 🗌 Required Action

ENVIRONMENTAL ISSUES

es regional issues such as Edwards Aquifer District, etc.)

ction Required

Required Action

Texas Department of Transportation Design Division Standard

ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS

EPIC

FILE: epic.dgn		dn: Tx[N:TxDOT CK:AM DW:VP		ск: AR		١R	
© TxDOT	January 2012	CONT	SECT	JOB		HIGHWAY		AY
	REVISIONS	6391	22	001		F	м	161
12-12-2011	(05)	DIST	COUNTY		SHE	ETI	NO.	
		ATL Morris, etc.		1	7			

e†¢