

STATE OF TEXAS  
TEXAS DEPARTMENT OF TRANSPORTATION


MATERIALS MAINTENANCE CONTRACT

PROJECT NO: MMC 6394-03-001

CSJ: 6394-03-001

LIMITS: \*

FOR PURCHASE & DELIVERY OF MATERIALS ONLY:  
HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT

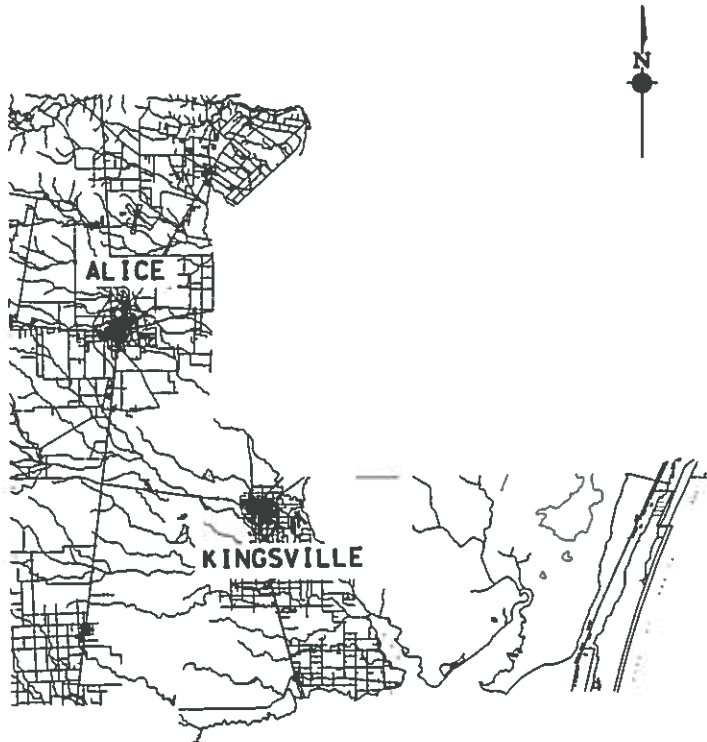


\*ALICE MAINTENANCE OFFICE AREA OF RESPONSIBILITY  
\*KINGSVILLE MAINTENANCE OFFICE AREA OF RESPONSIBILITY

INDEX OF SHEETS

1	TITLE SHEET
2A-2D	GENERAL NOTES
3	ESTIMATE & QUANTITY SHEET
4	PLAN SHEET & SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT



© 2020 TEXAS DEPARTMENT OF TRANSPORTATION

SUBMITTED FOR LETTING: 11-8-21  
*Armando Boyer, P.E.*  
BRIDGE ENGINEER

APPROVED FOR LETTING: 11-8-21  
*James O'Hanrahan, P.E.*  
DIRECTOR OF MAINTENANCE

**General Notes**

This contract shall commence upon the issuance of a work order by the Director of Maintenance or his representative and shall continue for 120 Calendar days. This project consists of described word defined with item 8013 “Hot-Mix Cold-Laid Asphalt Concrete Pavement (Material Only)”, the 2014 Texas Standard Specifications, General Notes and Plans.

This project includes plan sheets that are not part of the bid proposal. Plans can be viewed online or downloaded from the web at:

<http://www.txdot.gov/business/letting-bids/plans-online.html>

Order plans from any of the plan reproduction companies shown on the web at:

[http://www.dot.state.tx.us/business/contractors\\_consultants/repro\\_companies.htm](http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm)

Information concerning the project, plans, limits and locations may also be obtained by contacting the Director of Maintenance James Harris, P.E. or the Supervisor in charge of this project.

All Contractor pre-bid questions on this project are to be submitted by email to the following individual(s):

Director of Maintenance                      James D. Harris, P.E.                      [James.Harris1@txdot.gov](mailto:James.Harris1@txdot.gov)

Area Engineer  
Alice Area Office                              Lucio Ramos, P.E.                              [Lucio.Ramos@txdot.gov](mailto:Lucio.Ramos@txdot.gov)

Contractor questions will only be accepted through email to the above individuals. All contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All pre-bid questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Prior to beginning operations, a meeting will be held at the District Headquarters that should include material supplier and maintenance section supervisors within the contract area.

If several contracts are awarded to the same contractor, the contractor shall be sufficiently equipped to concurrently supply each contract material.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts.

**General Requirements and Covenants - Items 1 thru 9**

**Project Description** - This project shall consist of the purchase and delivery of Limestone Rock Asphalt materials from the supplier’s stockpile to the Maintenance Section’s designated locations specified. See estimate and quantity sheet for type and quantity of materials.

<b>Area Engineer</b>	<b>Address</b>	<b>Contact Person</b>
Lucio Ramos, P.E.	1071 N US Hwy 281 Alice, TX 78332	(361)661-7072

<b>Maintenance Section</b>	<b>Address</b>	<b>Maintenance Supervisor</b>
Alice	1071 N US 281 Alice, TX 78332	Calixto Mora (830)661-7056
Kingsville	1802 N 14th Street Kingsville, TX 78363	Alfredo Gaona (361)592-7361

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered.

The contractor is responsible for furnishing and delivering the dense-graded hot-mix asphalt to the agreed upon location(s). The delivery hours will be Monday through Friday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Various bid items and their associated quantities have been provided within this Contract in order to establish bid prices for the proposed work. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

**ITEM 2 – Instruction to Bidders**

By signing this proposal, a bidder acknowledges that he/she has a copy of the "Standard Specifications for Construction of Highways, Streets and Bridges", adopted by the Texas Department of Transportation, November 1, 2014. This specification book may be purchased from the Department.

**ITEM 3 - Award and Execution of Contract**

Material requests shall be issued by Work Order to the Contractor a minimum of 24 hours in advance. Each Work Order shall specify quantities to be delivered or picked up, location of delivery, and days to complete Work Order. A minimum of 250 Tons per work order will be required for delivery only.

**ITEM 4 - Scope of Work**

This contract may be extended per Special Provision 004-004.

**ITEM 6 – Control of Materials**

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website:

<https://www.txdot.gov/business/resources/producer-list.html>

**ITEM 8 – Prosecution and Progress**

Working Days shall be computed and charged in accordance with Article 8.3.1.5 "Calendar Day."

Individual Work Order charge days shall run concurrently with Contract time charges.

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages shall be charged each day for failure to meet each work order. This will include:

1. Failure to produce at the starting date or continually progress on the work order.
2. Failure to produce the required number of tons per day.

The amount assessed per day for liquidated damages shall be 3 % of the estimated cost of the work order, not to exceed \$500 per day.

**ITEM 9 – Measurement and Payment**

In accordance with Article 9.2 "Plans Quantity Measurement," plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities

shown in plans will be requested for pickup. Maintenance Sections may request quantities varying from those shown in the plans to meet their needs.

**ITEM 8013 – Hot-Mix Cold-Laid Asphalt Concrete Pavement (Material Only)**

Deliver Hot-Mix Cold-Laid ACP to the maintenance office or roadway in end dumps unless otherwise directed by the Maintenance Supervisor.

For sites 2 and 4 there will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.

Site Locations:


HMCL ACP TYPE D (DELIVERY)(SITE 1): Alice Maintenance Office at 1071 N US 281 Alice, TX 78332.

HMCL ACP TYPE D (DELIVERY)(SITE 2): Roadways within Alice Maintenance Office area of responsibility.

HMCL ACP TYPE D (DELIVERY)(SITE 3): Kingsville Maintenance Office at 1802 N 14th Street Kingsville, TX 78363.

HMCL ACP TYPE D (DELIVERY)(SITE 4): Roadways within Kingsville Maintenance Office area of responsibility.



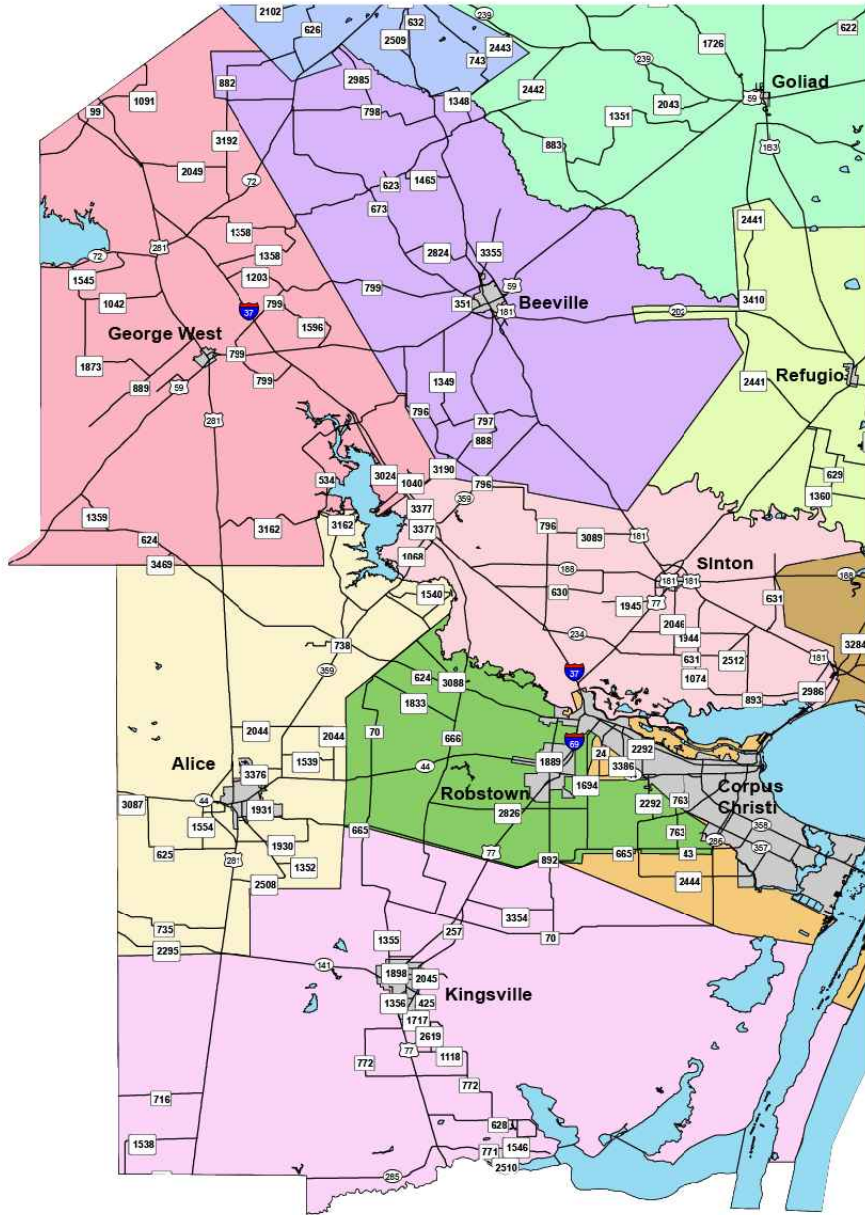


ALICE  
 CALIXTO MORA JR  
 361.661.7056

KINGSVILLE  
 ALFREDO GAONA  
 361.592.7361

**PLAN SHEET  
 & SUMMARY**

ITEM NO.	DESC NO.	SPEC NO.	DESCRIPTION	UNIT	QTY
8013	6009		HMCL ACP TYPE D (DELIVERY) (SITE 1)	TON	250
8013	6010		HMCL ACP TYPE D (DELIVERY) (SITE 2)	TON	1,500
8013	6011		HMCL ACP TYPE D (DELIVERY) (SITE 3)	TON	250
8013	6012		HMCL ACP TYPE D (DELIVERY) (SITE 4)	TON	1,500



CONT	SECT	JOB	HIGHWAY
6394	03	001	US0281
DIST	COUNTY		SHEET NO.
16	JIM WELLS, ETC.		4