

INDEX OF SHEETS

SHEET NO.	DESCRIPTION GENERAL
1	TITLE SHEET
2	SITE MAP
3, 3A-3C	GENERAL NOTES
4	ESTIMATE & QUANTITY SHEET
5	QUANTITY SUMMARIES

STATE OF TEXAS  
DEPARTMENT OF TRANSPORTATION



FHWA TEXAS DIVISION	PROJECT NO.		SHEET NO.
	MMC 6397-54-001		1
STATE	DISTRICT	COUNTY	
TEXAS	LFK	Shelby	
CONTROL	SECTION	JOB	HIGHWAY NO.
6397	54	001	FM 414, ETC.

PLANS OF PROPOSED  
STATE HIGHWAY IMPROVEMENT  
TYPE OF WORK:

**MATERIAL ONLY: AGGREGATE (GRADE 3 & 4)**  
MMC 6397-54-001  
**FM 414, ETC.**

SABINE COUNTY MAINTENANCE SECTION  
(DELIVERY TO SITES)

SEE SHEET #2 FOR SITE MAP


©2022




DocuSigned by:  
*Jeremy King, P.E.* 1/26/2022  
DISTRICT MAINTENANCE ENGINEER DATE  
5135292FE4184A4...  
APPROVED FOR LETTING:

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

DocuSigned by:  
*Zoe Boyer, P.E.* 1/26/2022  
DIRECTOR OF OPERATIONS DATE

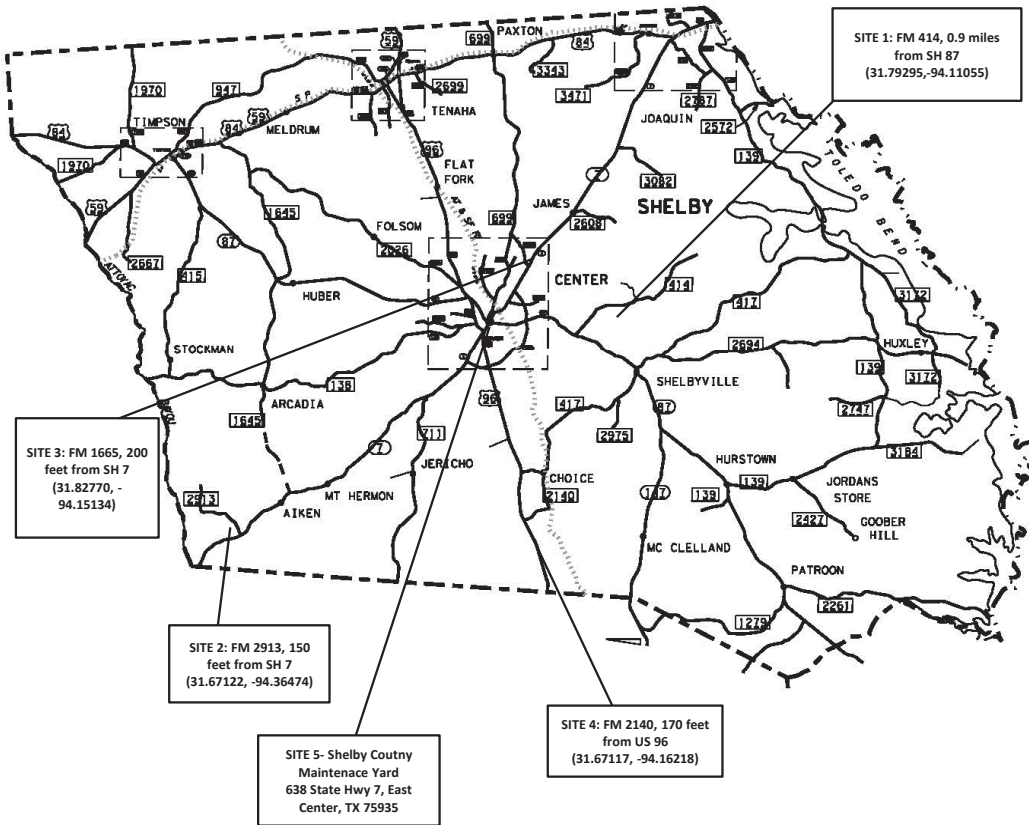

SITE MAP			
© 2022  Texas Department of Transportation <sup>®</sup>			
<b>CONT</b>	<b>SECT</b>	<b>JOB</b>	<b>HIGHWAY</b>
6397	54	001	FM 414, ETC.
<b>DIST</b>	<b>COUNTY</b>		<b>SHEET NO.</b>
LFK	SHELBY		2

**Project Number: MMC 6397-54-001****Control: 6397-54-001****County: Shelby****Highway: FM 414****GENERAL NOTES:**

**PROJECT DESCRIPTION:** Deliver Aggregate Grade 3 & Grade 4 (Material Only) to Shelby County Maintenance Yard located at 638 SH 7 East Center, TX 75935 and other various Shelby County locations to be used on state-maintained roadway within the Shelby County Maintenance Section.

Jeremy King                      [Jeremy.King@txdot.gov](mailto:Jeremy.King@txdot.gov)  
 Misty Raney                      [Misty.Raney@txdot.gov](mailto:Misty.Raney@txdot.gov)

Contractor questions will only be accepted through email to the above individual(s). All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

**TXDOT PROJECT SUPERVISORS:** All work on this contract will be scheduled and directed by the Maintenance Section Supervisor listed below. Payment will be made monthly for work completed and accepted according to specifications. All payment requests should be directed to the following Maintenance Section Supervisor listed below.

<u>COUNTY</u>	<u>SUPERVISOR</u>	<u>ADDRESS</u>	<u>CONTACT #</u>
Shelby	Clint Norton	638 SH 7 East Center, TX 75935	(936) 598-4113

**CONTRACT PROSECUTION:** Each contract awarded by the Department stands on its own and, as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures, and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

**ITEM 2: INSTRUCTIONS TO BIDDERS**

View plans on-line or download from the web at:  
<https://www.txdot.gov/business/letting-bids/plans-online.html>

**Project Number: MMC 6397-54-001****Control: 6397-54-001****County: Shelby****Highway: FM 414**

Order plans from any of the plan reproduction companies shown on the web at:  
[http://www.dot.state.tx.us/business/contractors\\_consultants/repro\\_companies.htm](http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm)

Bid items on this contract are listed to establish a unit price for each item. Certain items listed in the proposal may not be used if it is determined by the Engineer that the work will not be required. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

**ITEM 4: SCOPE OF WORK**

The contract may be extended twice if in the judgment of the Engineer, the contractor has satisfactorily fulfilled the terms and conditions of the contract. The extension must be agreed upon in writing by both parties to the contract and may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract or any mutually agreed modifications to the said terms and conditions by one or more cumulative change orders. The Engineer will set a deadline for completing the agreements. This deadline will be based in the time needed to re-let and award a new contract if no extension is agreed upon.

**ITEM 8: PROSECUTION AND PROGRESS**

Contract Time - The number of calendar days for this project shall be 120 days or until contract funds are expended.

Time charges will be in accordance with Article 8.3.1.5 "Calendar Day".

Per Special Provision 000-658, Schedule of Liquidated Damages, charges could occur if requested materials are not ready for delivery with a 24 hours' notice. Notify the Shelby County Maintenance Supervisor when encountering any unforeseen delays.

**ITEM 500: MOBILIZATION**

Mobilization does not apply to this materials contract.

**ITEM 520: WEIGHING AND MEASURING**

A daily summary spreadsheet will be required for all material delivered.

**ITEM 8016: AGGREGATES FOR SURFACE TREATMENTS (MATERIALS ONLY)**

Use aggregate that meets the SAC requirement of Class A. Previously tested aggregates delivered to the locations, which are found to contain excessive quantities of dust (more than 0.5 percent passing the no. 40 sieve) during pre-coating, stockpiling or hauling operations, will be rejected. Use test method Tex-200-F, Part II, for testing.

**Project Number: MMC 6397-54-001****Control: 6397-54-001****County: Shelby****Highway: FM 414**

This contract is for small quantities only. A work order will be issued to the contractor with a minimum of 24 hours' notice. The contractor shall be able to provide agreed upon amounts as needed.

Contact the Shelby County Maintenance Supervisor at least 1 hour prior to delivery.

The Contractor's driver shall report to the Shelby County Maintenance Supervisor or their representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time of delivery and departure.

Table 3 Los Angeles Abrasion, % Max, is lowered from 35 to 30 and is applicable to all aggregates.

Table 3 Magnesium Sulfate Soundness, % Max, is lowered from 25 to 20 and is applicable to all aggregates.

The site locations for delivery are as follows:

- Site 1 - FM 414, 0.9 miles from SH 87  
(31.79295, -94.11055)  
Shelby County  
AGGR (TY L GR 4) 450 Tons
  
- Site 2 - FM 2913, 150 feet from SH 7  
(31.67122, -94.36474)  
Shelby County  
AGGR (TY L GR 3) 400 Tons  
AGGR (TY L GR 4) 400 Tons
  
- Site 3 - FM 1656, 200 feet from SH 7  
(31.82770, -94.15134)  
Shelby County  
AGGR (TY L GR 3) 225 Tons  
AGGR (TY L GR 4) 225 Tons
  
- Site 4 - FM 2140, 170 feet from US 96  
(31.67117, -94.16218)  
Shelby County  
AGGR (TY L GR 3) 300 Tons

**Project Number: MMC 6397-54-001**

**Control: 6397-54-001**

**County: Shelby**

**Highway: FM 414**

- Site 5 - Shelby County Maintenance Yard  
638 State Hwy 7, East  
Center, TX 75935  
AGGR (TY L GR 4) 100 Tons

For Delivery Operations:

- Make all deliveries between the hours of 8:00 am and 3:00 pm CST unless prior arrangements have been made with the Shelby County Maintenance Supervisor.



# Estimate & Quantity Sheet

COUNTY Shelby

CONTROLLING PROJECT ID 6397-54-001


DISTRICT Lufkin  
HIGHWAY FM0414

CONTROL SECTION JOB		6397-54-001		TOTAL EST.		TOTAL FINAL	
PROJECT ID		A00185314					
COUNTY		Shelby					
HIGHWAY		FM0414					
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8039-6184	AGGR (TY L GR 3) (DEL) (ST2)	TON	400.000		400.000	
	8039-6185	AGGR (TY L GR 3) (DEL) (ST3)	TON	225.000		225.000	
	8039-6186	AGGR (TY L GR 3) (DEL) (ST4)	TON	300.000		300.000	
	8039-6197	AGGR (TY L GR 4) (DEL) (ST1)	TON	450.000		450.000	
	8039-6198	AGGR (TY L GR 4) (DEL) (ST2)	TON	400.000		400.000	
	8039-6199	AGGR (TY L GR 4) (DEL) (ST3)	TON	225.000		225.000	
	8039-6201	AGGR (TY L GR 4) (DEL) (ST5)	TON	100.000		100.000	

DISTRICT	COUNTY	CCSJ	SHEET
Lufkin	Shelby	6397-54-001	4

**SUMMARY OF MATERIALS ITEMS**

		ITEM NO.	8039	
COUNTY	HIGHWAY NO.	AGGR (TY L GR-3) DEL		AGGR (TY L GR-4) (DEL)
		TONS		
SHELBY	SITE 1: FM 414, 0.9 miles from SH 87 (31.79295, -94.11055)			450
SHELBY	SITE 2: FM 2913, 150 feet from SH 7 (31.67122, -94.36474)	400		400
SHELBY	SITE 3: FM 1665, 200 feet from SH 7 (31.82770, -94.15134)	225		225
SHELBY	SITE 4: FM 2140, 170 feet from US 96 (31.67117, -94.16218)	300		
SHELBY	SITE 5- Shelby Coutny Maintenace Yard 638 State Hwy 7, East Center, TX 75935			100
<b>PROJECT TOTALS</b>		<b>925</b>		<b>1,175</b>

QUANTITY SUMMARIES			
© 2022  Texas Department of Transportation®			
CONT	SECT	JOB	HIGHWAY
6397	39	001	FM 414, ETC.
DIST	COUNTY		SHEET NO.
LFK	SHELBY		5