## STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT

PROJECT: MMC 6396-62-001 COUNTY: TITUS, ETC. HIGHWAY: US 271, ETC.

FOR THE PURCHASE OF MATERIALS ONLY, HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT

I HEREBY CERTIFY THAT THE CONSTRUCTION WORK ON THIS PROJECT WAS PERFORMED IN SUBSTANTIAL COMPLIANCE WITH THE CONTRACT

Note: See Project Summary Sheets for complete listing of limits, lengths, equations and exceptions.

CONTRACTOR NAME: CONTRACTOR ADDRESS:

Index of Sheets:

2A-2D General Notes

- 3 Estimate & Quantity Sheet
- 4 Quantity Summary
- 5 Map Atlanta District

DATE WORK BEGAN:

DATE WORK COMPLETED:

DATE WORK ACCEPTED:

RECOMMENDED FOR LETTING:

APPROVED FOR LETTING:

**Director of Maintenance** 

DistPEMENGMEEFAtlanta)

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

DISTRICT	DISTRICT COUNTY		PROJECT	
ATLANTA	TITUS, ETC.	US 271, ETC.	MMC 6396-62-001	

 <sup>2022</sup> by Texas Department of Transportation All Rights Reserved.

County: Titus, etc. Control: 6396-62-001

Highway: US 0271, etc.

#### **GENERAL NOTES:**

#### General:

This project consists of supplying hot-mix cold-laid asphalt concrete pavement (HMCL) at various locations in the Atlanta District. This project covers the following counties: Morris, Panola, and Titus. The sites for delivery will be as identified in these plans.

Contractor questions on this project are to be emailed to the following individuals:

Jason Dupree, P.E. – Director of Maintenance

<u>Jason.Dupree@txdot.gov</u>

Charlotte Aslin – Contract Specialist

<u>Charlotte.Aslin@txdot.gov</u>

Contractor questions will only be accepted through email to the above individuals. All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Questions regarding the plans and/or the project after the contract has been awarded should be referred to the Managing Engineer:

Jason Dupree, P.E. Atlanta District Director of Maintenance 701 E. Main St. Atlanta, TX 75551 903-799-1248

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

County: Titus, etc. Control: 6396-62-001

Highway: US 0271, etc.

Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

This contract is for callout work. Callouts will be issued by Work Order containing delivery sites and quantities along with number of working days allowed for the Work Order. Multiple Work Orders should be expected, and the contractor must be capable and sufficiently staffed to concurrently process any or all contracts. The minimum quantity per Work Order is 100 tons.

Department-approved safety hats and safety vests will be worn by all workers and visitors when:

Workers are outside of vehicles at all outdoor worksites. This includes those who occasionally visit worksites either on the highway surface or right-of-way.

Working in areas where there is a danger of head injury from impact, from falling or flying objects, or from electrical shock or burns.

Non-compliance with this requirement will be grounds for suspension of work.

All work on this contract will be scheduled and directed by the Maintenance Section Supervisors as listed in the table below.

MAINTENANCE SECTION	MAINTENANCE SUPERVISOR	TELEPHONE NUMBER	
CARTHAGE (Site 1)	KYLE WEATHERFORD	903-693-6331	
DAINGERFIELD (Site 2)	CARL PETERS	903-645-2519	
MT. PLEASANT (Site 3)	CARL PETERS	903-572-8511	

#### **Item 2: Instructions to Bidders**

This project includes plan sheets that are not part of the bid proposal. Views plans on-line or download from the web at: <a href="https://www.txdot.gov/business/letting-bids/plans-online.html">https://www.txdot.gov/business/letting-bids/plans-online.html</a>.

Order plans from any of the plan reproduction companies shown on the web at: <a href="http://www.dot.state.tx.us/business/contractors">http://www.dot.state.tx.us/business/contractors</a> consultants/repro companies.htm.

County: Titus, etc. Control: 6396-62-001

Highway: US 0271, etc.

#### **Item 8: Prosecution and Progress**

Time charges will be in accordance with Article 8.3.1.5 "Calendar Day".

Individual work order charge days shall run concurrently with contract time charges.

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages will be charged for failure to complete each Work Order in the specified number of days. The amount assessed per day for liquidated damages will be 5% of the estimated cost of the Work Order, but not to be less than \$250 per day and not to exceed \$1000 per day.

Time requirements for each of the Work Orders will be indicated on each individual Work Order. Contractor will be given no less than 48 hours' notice for HMCL delivery to successfully complete each Work Order.

Notify the Maintenance Supervisor when encountering any unforeseen delays.

#### **Item 9: Measurement & Payment**

In accordance with Article 9.1,"Measurement of Quantities," furnish the tare and maximum gross weights as well as the volume capacity of all vehicles, trucks, truck-tractors, trailers, semitrailers, or combination of such vehicles used to deliver materials for the contract. Also, furnish calculations supporting these weights and capacities. Provide all measurements required for pay a minimum of 2 days before the equipment is used.

In accordance with Article 9.2 "Plans Quantity Measurement," plans quantity measurement requirements are not applicable for this contract.

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

In addition to the complete destination address, each delivery ticket must be clearly marked with the work order number. Each shipment must be accompanied by a haul ticket.

Contractor's driver shall report to the State's representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time.

#### Item 500: Mobilization

Mobilization does not apply to this materials contract.

County: Titus, etc. Control: 6396-62-001

Highway: US 0271, etc.

#### Item 502: Barricades, Signs and Traffic Handling

TxDOT will provide any traffic control needed.

Use strobe lights or rotating beacons on all motorized equipment, operating on or adjacent to the road surface.

#### **Item 8013: Hot-Mix Cold-Laid Asphalt Concrete Pavement (Materials Only)**

Delivery costs incurred by the contractor are subsidiary to this item.

Use aggregate that meets the SAC requirement of Class B or better.

Asphalt shall be AC-0.6 unless otherwise approved by the Engineer.

The Plant is the designated aggregate sampling location, unless otherwise approved by the Engineer.

Material deliveries shall be covered by a tarp during transport.

ESTIMATE SUMMARY									
	WAY	A L T	(	ITEM CODE	<b>=</b>	DESRIPTION		TOTAL	
EST	FINAL		ITEM NO	DESC CODE	NO		UNIT	EST	FINAL
			8013	6009		HMCL ACP TYPE D (DELIVERY)(SITE 1) HMCL ACP TYPE D (DELIVERY)(SITE 2) HMCL ACP TYPE D (DELIVERY)(SITE 3)	TON	250.000	
			8013	6010		HMCL ACP TYPE D (DELIVERY)(SITE 2)	TON	250.000	
			8013	6011		HIVICL ACP TYPE D (DELIVERY)(SITE 3)	TON	250.000	
	-	$\vdash$							
		$\vdash$							
	<del>                                     </del>	$\vdash$							
		$\vdash$							
	<del>                                     </del>	Н							
		$\vdash$							
	1	$\vdash$							
	<del>                                     </del>	$\vdash$							
	<del>                                     </del>	$\vdash$							
	<del>                                     </del>	$\vdash$							
	-								
	<del>                                     </del>	$\vdash$							
	<del>                                     </del>	$\vdash$							
	L			<u>I</u>					

# ESTIMATE & QUANTITY SHEET


DISTRICT	COUNTY	HIGHWAY	PROJECT	SHEET NO	l
ATL	TITUS, ETC.	US 271, ETC.	MMC 6396-62-001	3	l

ITEM		DESCRIPTION	QUANTITY	UNIT
8013	6009	HMCL ACP TYPE D (DELIVERY)(SITE 1)	250	TON
	S	ite 1 - Carthage Maintenance Office - 1410 S Shelby St	, Carthage, TX	
8013	6010	HMCL ACP TYPE D (DELIVERY)(SITE 2)	250	TON
	Site	2 - Daingerfield Maintenance Office - 552 US Hwy 259N	l, Daingerfield, TX	
8013	6011	HMCL ACP TYPE D (DELIVERY)(SITE 3)	250	TON
	Site 3	- Mt Pleasant Maintenance Office - 2210 West Ferguso	on, Mt Pleasant, TX	

## **QUANTITY SUMMARY**

© 2022 by Texas Department of Transportation All Rights Reserved

DISTRICT	COUNTY	HIGHWAY	PROJECT	SHEET NO
ATL	TITUS, ETC.	US 271, ETC.	MMC 6396-62-001	4

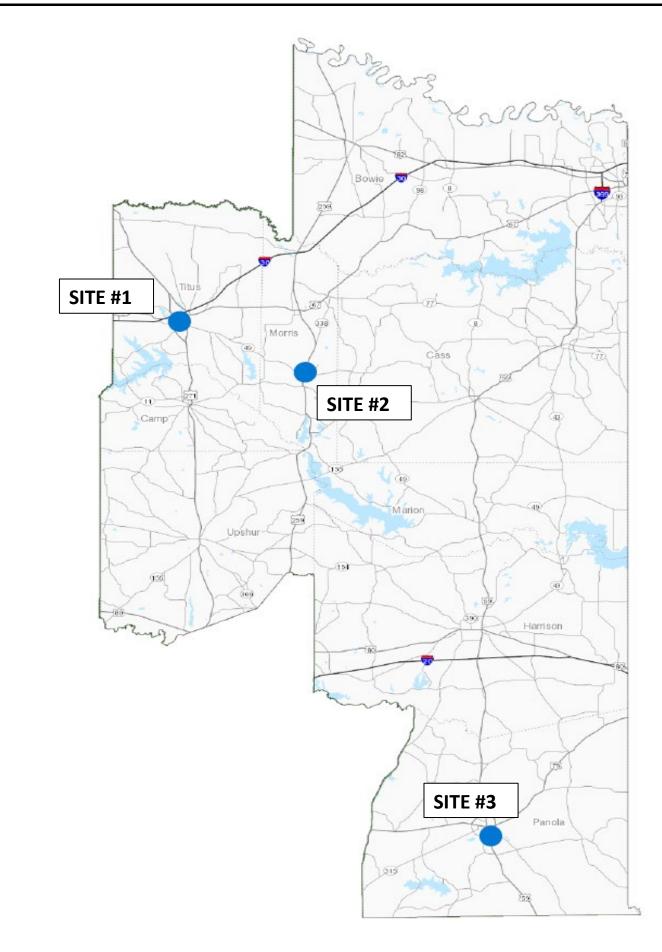

### **MAP - ATLANTA DISTRICT**

© 2022 by Texas Department of Transportation All Rights Reserved

DISTRICT	COUNTY	HIGHWAY	PROJECT	SHEET NO
ATLANTA	TITUS, ETC.	US 271, ETC.	MMC 6396-62-001	5