

Project Number: RMC 6429-94-001**Control:** 6429-94-001**County:** Polk**Highway:** US 59, ETC.**GENERAL NOTES:**

Project Description: This project consists of repairing/upgrading metal beam guard fence (MBGF), crash attenuator systems and bridge rail, on a call-out basis in the Polk County Maintenance Section

TXDOT PROJECT SUPERVISOR: All work on this contract will be scheduled and directed by the Maintenance Section Supervisor(s) listed below. Payment will be made on a monthly basis for work completed and accepted according to specifications. All payment requests should be directed to the Maintenance Section Supervisor(s) listed below.

<u>COUNTY</u>	<u>SUPERVISOR</u>	<u>ADDRESS</u>	<u>CONTACT #</u>
Polk	James Henagan	3161 US 59 Livingston, TX	(936) 0327-8914

CONTRACT PROSECUTION:

Each contract awarded by the Department stands on its own and, as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Existing regulatory, warning and guide signs within project limits are to remain visible to the traveling public at all times. If a sign must be repositioned during construction operations, move and install the sign to an approved location. Use care when working near existing signs and repair or replace signs damaged by work operations. All work involved repositioning existing signs will be subsidiary to various bid items.

Furnish materials and make repairs to the existing roadway and right-of-way at any location damaged by construction operations. This work shall be done in an approved manner and will be subsidiary to various bid items.

Minimize vehicles and equipment in construction areas to lessen the impact on existing vegetation. The intent of the plans is to prepare only that portion of the right-of-way necessary for construction.

Provide suitable access at all times to adjacent businesses, private property, and side roads.

Remove dirt, silt, rocks, debris and other foreign matter that accumulates in structures due to the Contractor's operations as directed. Keep stream channels open at all times. This work will not be paid for directly but will be subsidiary to pertinent items.

All workers on TxDOT right-of-way shall wear reflective clothing meeting ANSI Class II requirements during the day and ANSI Class III requirements during the night. Non-compliance with any of these requirements shall be grounds for suspension of work.

Project Number: RMC 6429-94-001**Control:** 6429-94-001**County:** Polk**Highway:** US 59, ETC.

Contractor questions on this project are to be addressed to the following individual(s):

Jeremy King Jeremy.King@TxDOT.gov
 Tamara Gibson Tamara.Gibson@TxDOT.gov

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

Item 2: Instructions to Bidders

View plans on-line or download from the web at:

http://www.txdot.gov/business/contractors_consultants/plans_online.htm

Order plans from any of the plan reproduction companies shown on the web at:

http://www.txdot.gov/business/contractors_consultants/repro_companies.htm

Item 4: Scope of Work

The contract may be extended if in the judgment of the Engineer, the contractor has satisfactorily fulfilled the terms and conditions of the contract. The extension must be agreed upon in writing by both parties to the contract and may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract or any mutually agreed modifications to the said terms and conditions by one or more cumulative change orders. The Engineer will set a deadline for completing the agreements. This deadline will be based in the time needed to re-let and award a new contract if no extension is agreed upon.

Item 5: Control of the Work

The Contractor shall become knowledgeable of the location of utilities within the right-of-way and shall use care when working near them.

Project Number: RMC 6429-94-001**Control:** 6429-94-001**County:** Polk**Highway:** US 59, ETC.**Item 7: Legal Relations and Responsibilities**

The proposed work of this project is to repair and upgrade metal beam guard fence and crash attenuator at various locations through-out the Polk County Maintenance Section. This activity maintains the original line and grade, hydraulic capacity and original purpose of the site. Therefore, this project meets the definition of a routine maintenance activity as defined in the TPDES General Permit No. TXR150000 issued March 5, 2018 and TCEQ's TPDES CGP does not apply.

Dispose of all vegetative matter and any other materials removed from State Right of Way in accordance with applicable environmental laws, rules, regulations and requirements.

In order to maintain compliance with Chapter 64 of the Texas Parks and Wildlife Code and Migratory Bird Treaty Act (MBTA), construction activities that may affect nests (i.e. tree removal, tree limbing, bridge work) shall be conducted outside of the nesting season (March 15 to September 15). In the event birds or active nests (eggs and/or nestlings present) are encountered, contact the engineer prior to conducting work.

Texas Trailing Phlox, a federally listed endangered species, is present within the ROW along FM 1276 from 5 miles South of US 190 to 7 miles South of US 190. No work is to occur within this area without prior approval from the Area Engineer.

Portions of FM 1276, FM 943, and FM 2610 are adjacent to Big Thicket National Preserve (BITH). Below are the following roadway limits adjacent to BITH and actions:

FM 2610: From 0.25 mi. North of Menard Creek to 0.14 mi. South of Menard Creek.

FM 1276: From the intersection of FM 943 to 0.73 mi. North of intersection of FM 943.

FM 943: From 0.37 mi. West of Menard Creek to 0.30 mi. East of Menard Creek; From 0.36 mi. East of Segno Fire Lane Rd. to 0.54 mi. East of Segno Fire Lane Rd; From 1.18 mi. Northwest of FM 1276 intersection to 0.23 mi. Southeast of FM 1276 intersection; From Hardin County Line to 2.32 mi. Northwest of Hardin County Line; From 0.31 mi. Southeast of Wiggins Loop Rd. to 2.01 mi. Southeast of Wiggins Loop Rd.

No trees within the limits described above along FM 1276, FM 943, and FM 2610 are to be cut or otherwise damaged without prior approval from the Area Engineer.

Contractor to repair or replace in kind, at their own expense, any historic materials damaged (buildings, historical markers, etc.) in the course of executing the work. Contractor is responsible for locating replacement source for historic materials damaged in the course of the work. TxDOT Environmental Affairs Division is to be informed of proposed repairs to facilitate consultation with Texas Historical Commission prior to execution of repairs.

Project Number: RMC 6429-94-001**Control:** 6429-94-001**County:** Polk**Highway:** US 59, ETC.**Item 8: Prosecution and Progress**

For this project, working days will be computed and charged in accordance with Item 8, Section 3.1.5, "Calendar Day".

Contractor shall be on site within 48 hours for emergency work, and within five business days for regular callout work orders, unless otherwise agreed upon with the Engineer.

Notify the Engineer or his Representative at least 24 hours prior to beginning work.

Item 9: Measurement and Payment

This Contract includes callout work. In accordance with Article 9.2., "Plans Quantity Measurement", plans quantity measurement requirements are not applicable. The quantities shown are for estimates only and payment will be based on the actual quantities placed.

Item 502: Barricades, Signs and Traffic Handling

Traffic Control Plan (TCP):

Furnish and maintain all warning signs, flaggers, channelizing devices, etc. required for traffic control on this contract in accordance with Item 502.1 & 502.2. This work will not be paid for directly but will be considered subsidiary to the various bid items.

For protection of the traveling public, direct traffic through the work area using signs, flaggers, and other devices. Required signs are shown in the plans on the Barricade and Construction Standards and Traffic Control Plan Sheets. The latest edition of the "Texas Manual on Uniform Traffic Control Devices" shall also be used as a guide for handling traffic on this project.

Texas Transportation Code 547.105 authorizes the use of warning lights to promote safety and provides an effective means of gaining the travelling public's attention as they drive in areas where construction crews are present. In order to influence the public to move over when high risk construction activities are taking place, minimize the utilization of blue warning lights. These lights must be used only while performing work on or near the travel lanes or shoulder where the travelling public encounters construction crews that are not protected by a standard work zone set up such as a lane closure, shoulder closure, or one-way traffic control. Refrain from leaving the warning lights engaged while travelling from one work location to another or while parked on the right-of-way away from the pavement or a work zone.

No lane closures on US 59 will be allowed after noon on Fridays or on days preceding major holidays unless otherwise approved. Extra time has been added to the total number of working days allocated for this. Work shall be planned such that this is not a limiting factor in the schedule.

Restrict construction work to single lane widths with only minor disruptions in traffic flow. Lane closures shall conform to the traffic control plan for lane closures as shown in the plans. No overnight closures will be permitted.

Project Number: RMC 6429-94-001

Control: 6429-94-001

County: Polk

Highway: US 59, ETC.

Provide temporary Rumble Strips as shown on work zone standards when lane closures are necessary.

Provide a flashing arrow panel and a truck-mounted attenuator to supplement required signs and devices for each lane closure.

Provide adequate flaggers to protect the traveling public when working on or near a roadway carrying traffic. All flaggers shall wear hardhats and ANSI approved reflective safety vests. Vests shall be clean and worn fully fastened.

Install "Be Prepared to Stop" (CW20-7B) and "Flagger Ahead" (CW22-7D) signs when flaggers are present. Position the signs where good visibility and traffic control can be maintained.

Provide one high-intensity yellow, rotating dome-light on all equipment such as distributors, spreader boxes, lay-down machines, rollers, backhoes, road graders, loaders, etc. Mount lights high enough to be visible from all directions and operating when the equipment is within 30 feet of the travel way. On all other equipment, such as trucks, trailers, automobiles, etc., use emergency flashers while within the work zone.

Item 540: Metal Beam Guard Fence & Item 770: Guard Fence Repair

For existing non-mow strip to remain in place, backfill top 4" in an existing abandoned post hole with HMA and backfill below 4" with suitable earth material. This work will be subsidiary to Item 540.

GF(31)-14, GF(31)DAT-14, GF(31)LS-17, GF(31)T101-13, GF(31)TR-14, SGT (10S)31-16, SGT(11S)31-18, SGT(12S)31-18, SGT(13S)31-18, & BED-14 standards shall be used on upgrades unless otherwise directed by the Engineer.

All materials furnished by the Contractor shall be new.

Contractor is responsible for all materials to do the work being performed, including nose cones and hardware.

Contractor is to replace any damaged delineation or object markers to any damaged or new guardrail system.

Existing concrete that will conflict with installing the new system shall be completely removed and disposed of by the Contractor. This work will not be paid for directly but will be considered subsidiary to removal of the existing guardrail terminal.

Timber posts shall be domed. When posts are placed, new posts shall match the existing post such that each is uniform in height.

At the close of work each day, if repairs are not complete, the Contractor shall protect the ends of metal beam guard fence in an approved manner, so that no blunt ends are exposed to approaching traffic. Plastic drums will be required at these locations.

Project Number: RMC 6429-94-001

Control: 6429-94-001

County: Polk

Highway: US 59, ETC.

Completely clean the area of all debris including debris left from reconstruction of the Guardrail or Bridge Rail assembly as well as any litter created by the crew. Remove or spread surplus soil and material that has collected under the rail to the natural grade of the surrounding. This work will not be paid for directly but will be considered subsidiary to various items.

Item 658: Delineator and object Marker Assemblies

Install delineators on the departure side of the posts when mounting to the metal beam guard fence and guardrail end treatments.

Install CTB barrier reflector on top of concrete bridge rail and concrete barriers
Install D-SW delineators on the departure side of the steel bridge rail post.

Use the Items below in the locations listed.

Undivided Highways

MBGF:

0658 6062 INSTL DEL ASSM (D-SW)SZ 1 (BRF) GF2 (BI)

Concrete rail:

0658 6014 INSTL DEL ASSM (D-SW)SZ (BRF) CTB (BI)

Divided Highway

MBGF:

Yellow - 0658 6064 INSTL DEL ASSM (D-SY)SZ 1(BRF)GF
White - 0658 6061 INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2

Concrete Rail:

Yellow - 0658 6026 INSTL DEL ASSM (D-SY)SZ (BRF)CTB
White - 0658 6013 INSTL DEL ASSM (D-SW)SZ (BRF)CTB

Item 770: Guard Fence Repair

Do not mix parts on SGT's. Use only manufacture parts for each.

Project Number: RMC 6429-94-001

Control: 6429-94-001

Project Number: RMC 6429-94-001

Control: 6429-94-001

County: Polk

Highway: US 59, ETC.

County: Polk

Highway: US 59, ETC.

Item 774: Attenuator Repair

The contractor shall furnish details on the method proposed to “Retrofit” the new systems at the existing crash cushion locations, prior to beginning this work.

Item 6185: Truck Mounted Attenuator (TMA)

Truck Mounted Attenuators (TMA’s) shall meet the requirements of this item and the Department’s Compliant Work Zone Traffic Control Device List.

Truck Mounted Attenuators TMA’s as shown on the TCP’s shall be used. Whether shown on the TCP’s or added by the Department, TMA’s shall be paid for under Item 6185, “Truck Mounted Attenuator” for the type of operation being performed.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6429-94-001

DISTRICT Lufkin
HIGHWAY US0059

COUNTY Polk

CONTROL SECTION JOB				6429-94-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00192508			
COUNTY				Polk			
HIGHWAY				US0059			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	429-6007	CONC STR REPAIR (VERTICAL & OVERHEAD)	SF	5.000		5.000	
	500-6033	MOBILIZATION (CALLOUT)	EA	12.000		12.000	
	540-6001	MTL W-BEAM GD FEN (TIM POST)	LF	500.000		500.000	
	540-6006	MTL BEAM GD FEN TRANS (THRIE-BEAM)	EA	10.000		10.000	
	540-6016	DOWNSTREAM ANCHOR TERMINAL SECTION	EA	4.000		4.000	
	540-6033	MTL BM GD FEN (LONG SPAN SYSTEM)	EA	2.000		2.000	
	542-6001	REMOVE METAL BEAM GUARD FENCE	LF	200.000		200.000	
	658-6013	INSTL DEL ASSM (D-SW)SZ (BRF)CTB	EA	10.000		10.000	
	658-6014	INSTL DEL ASSM (D-SW)SZ (BRF)CTB (BI)	EA	10.000		10.000	
	658-6026	INSTL DEL ASSM (D-SY)SZ (BRF)CTB	EA	10.000		10.000	
	658-6061	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2	EA	10.000		10.000	
	658-6062	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2(BI)	EA	10.000		10.000	
	658-6064	INSTL DEL ASSM (D-SY)SZ 1(BRF)GF2	EA	10.000		10.000	
	770-6001	REPAIR RAIL ELEMENT (W - BEAM)	LF	2,000.000		2,000.000	
	770-6002	REPAIR RAIL ELEMENT (THRIE - BEAM)	LF	76.000		76.000	
	770-6003	REP RAIL ELMNT(THRIE-BM TRANS TO W -BM)	LF	8.000		8.000	
	770-6010	REM / REPL TIMBER/STL POST W/O CONC FND	EA	450.000		450.000	
	770-6011	REM / REPL TIMBER / STL POST W/CONC FND	EA	5.000		5.000	
	770-6017	REALIGN POSTS	EA	75.000		75.000	
	770-6019	REMOVE & REPLACE BLOCKOUT	EA	125.000		125.000	
	770-6021	REPLACE SINGLE GDRAIL TERMINAL RAIL	LF	1,000.000		1,000.000	
	770-6022	REPLACE SINGLE GDRAIL TERMINAL POST	EA	150.000		150.000	
	770-6027	REMOVE GDRAIL END TRT / REPL WITH SGT	EA	5.000		5.000	
	770-6028	REPL SINGLE GDRAIL TERM IMPACT HEAD	EA	5.000		5.000	
	770-6029	REM & RESET SGT IMPACT HEAD	EA	5.000		5.000	
	770-6030	REPLACE SGT CABLE ASSEMBLY	EA	5.000		5.000	
	770-6031	REPLACE SGT CABLE ANCHOR	EA	5.000		5.000	
	770-6032	REPLACE SGT STRUT	EA	5.000		5.000	
	770-6033	REPLACE SGT OBJECT MARKER	EA	2.000		2.000	
	770-6052	REPAIR STEEL POST WITH BASE PLATE	EA	5.000		5.000	
	774-6015	REPAIR (NARROW QUAD)	EA	2.000		2.000	
	774-6066	REPAIR TAU II (N)	LF	50.000		50.000	
	776-6035	REPAIR (W-BEAM - T101 RAIL)	LF	75.000		75.000	
	6185-6002	TMA (STATIONARY)	DAY	12.000		12.000	

DISTRICT	COUNTY	CCSJ	SHEET
Lufkin	Polk	6429-94-001	3

2/17/2023 9:29:14 AM T:\LF\KDM\Main\Contracts\0-RMC - Routine Maintenance Contracts\FY23 Plans\6429-94-001 Polk MBGF Repairs\DRN\05\MLMBGF.dgn

SUMMARY OF GUARD FENCE, ATTENUATOR & RAIL REPAIR ITEMS				
ITEM NO.		DESCRIPTION	UNIT	QUANTITY
0429	6007	CONC STR REPAIR (VERTICAL & OVERHEAD)	SF	5
0500	6033	MOBILIZATION (CALLOUT)	EA	12
0540	6001	MTL W-BEAM GD FEN (TIM POST)	LF	500
0540	6006	MTL BEAM GD FEN TRANS (THRIE-BEAM) ①	EA	10
0540	6016	DOWNSTREAM ANCHOR TERMINAL SECTION	EA	4
0540	6033	MTL BM GD FEN (LONG SPAN SYSTEM)	EA	2
0542	6001	REMOVE METAL BEAM GUARD FENCE	LF	200
0658	6013	INSTL DEL ASSM (D-SW)SZ (BRF)CTB	EA	10
0658	6014	INSTL DEL ASSM (D-SW)SZ (BRF)CTB (BI)	EA	10
0658	6026	INSTL DEL ASSM (D-SY)SZ (BRF)CTB	EA	10
0658	6062	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2(BI)	EA	10
0658	6061	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2	EA	10
0658	6064	INSTL DEL ASSM (D-SY)SZ 1(BRF)GF2	EA	10
0770	6001	REPAIR RAIL ELEMENT (W - BEAM)	LF	2,000
0770	6002	REPAIR RAIL ELEMENT (THRIE - BEAM)	LF	76
0770	6003	REP RAIL ELMNT(THRIE-BM TRANS TO W -BM)	LF	8
0770	6010	REM / REPL TIMBER/STL POST W/O CONC FND	EA	450
0770	6011	REM / REPL TIMBER / STL POST W/CONC FND	EA	5
0770	6017	REALIGN POSTS	EA	75
0770	6019	REMOVE & REPLACE BLOCKOUT	EA	125
0770	6021	REPLACE SINGLE GDRAIL TERMINAL RAIL	LF	1,000
0770	6022	REPLACE SINGLE GDRAIL TERMINAL POST	EA	150
0770	6027	REMOVE GDRAIL END TRT / REPL WITH SGT	EA	5
0770	6028	REPL SINGLE GDRAIL TERM IMPACT HEAD	EA	5
0770	6029	REM & RESET SGT IMPACT HEAD	EA	5
0770	6030	REPLACE SGT CABLE ASSEMBLY	EA	5
0770	6031	REPLACE SGT CABLE ANCHOR	EA	5
0770	6032	REPLACE SGT STRUT	EA	5
0770	6033	REPLACE SGT OBJECT MARKER	EA	2
0770	6052	REPAIR STEEL POST WITH BASE PLATE	EA	5
0774	6015	REPAIR (NARROW QUAD)	EA	2
0774	6066	REPAIR TAU II (N)	LF	50
0776	6035	REPAIR (W-BEAM - T101 RAIL)	LF	75


NOTE: ALL QUANTITIES ARE AN ESTIMATE AND SHALL BE VERIFIED IN THE FIELD PRIOR TO BEGINNING OF WORK. NO GUARANTEES ARE MADE AS TO THE AMOUNT OF WORK WHICH WILL BE PERFORMED AT EACH LOCATION.

① WHEN ATTACHING THRIE-BEAM TO T202, T2 OR T201 RAILS, ANCHOR PLATES AS SHOWN ON DETAILS T202 TR, WILL BE CONSIDERED SUBSIDIARY TO THE THRIE-BEAM SYSTEM.


SUMMARY OF TRAFFIC CONTROL ITEMS	
LOCATION	•ITEM 6185 6002
	TMA (STATIONARY)
	DAY
VARIOUS	12

* USE TMA WHEN REQUIRED TO DO SO AS OUTLINED BY TCP STANDARDS.

QUANTITY SUMMARIES

2023 			
CONT	SECT	JOB	HIGHWAY
6429	94	001	US 59, ETC.
DIST	COUNTY	SHEET NO.	
LFK	POLK	4	


TYPICAL LOCATION OF CROSSROAD SIGNS

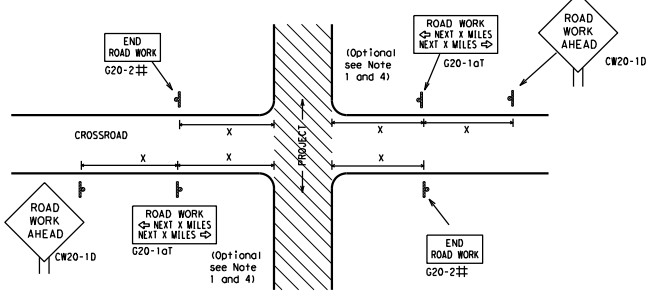

May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
- The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
- Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
- The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
- Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
- When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

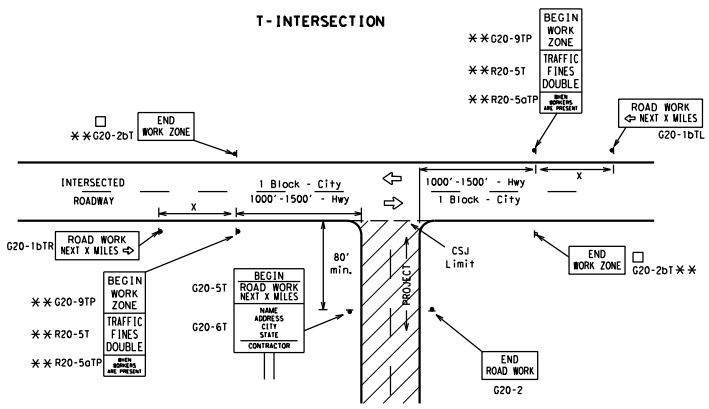

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{15.6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed	Sign Δ Spacing "X"
CW20 ⁴	48" x 48"	48" x 48"	MPH	Feet (Approx.)
CW21			30	120
CW22			35	160
CW23			40	240
CW25			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
			55	500 ²
			60	600 ²
			65	700 ²
			70	800 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	75	900 ²
			80	1000 ²
			*	*
			*	3


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

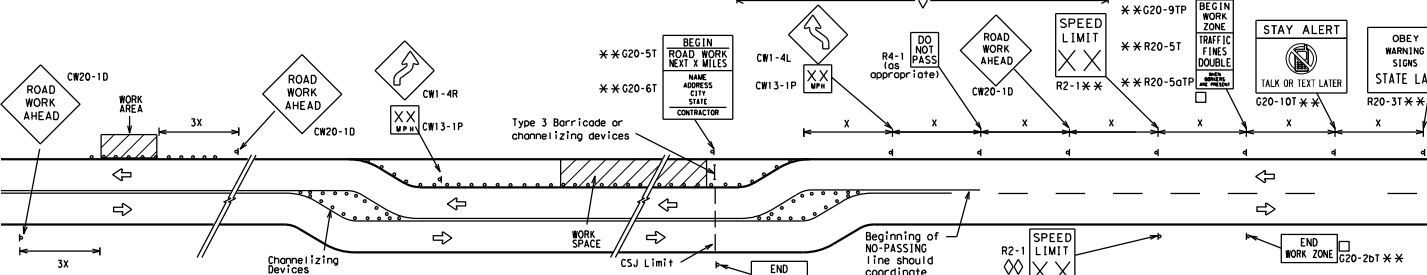

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

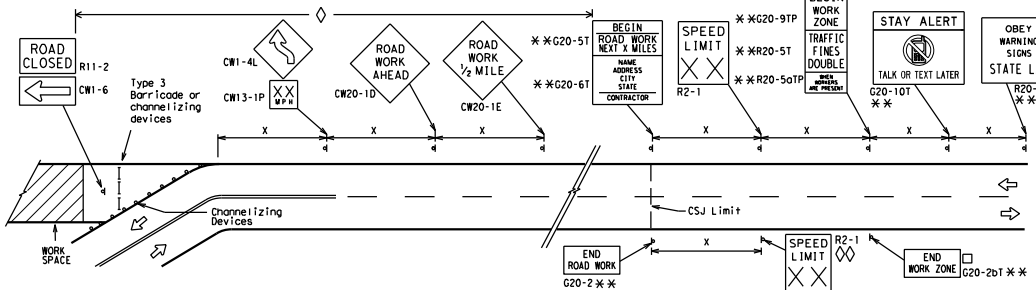

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
 - CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
 - Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
 - Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12

Texas Department of Transportation
Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC(2)-21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DR: TxDOT	EX: TxDOT
© TxDOT November 2002	CONF	SECT	JOB	HIGHWAY
REVISIONS	6429	94	001	US 59, ETC.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	LFK	POLK	6	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by the Texas Department of Transportation for any purpose, material, or otherwise. This conversion is the property of the Texas Department of Transportation. All rights reserved. © 2002 Texas Department of Transportation. All rights reserved.

DATE: 1/5/2023 11:02:49 AM
 FILE: T:\LFDK\Main\Int\Contr\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT or the Board of Transportation for the use of this standard or for incorrect results or damages resulting from its use.

DATE: 1/5/2023 11:02:50 AM
 FILE: T:\LFDK\DWG\Int Contracts\0-RMC - Routine Maintenance Contracts\SV23 Plans\6429-94-001 Polk M&F Repair\0001STD\TRAFFIC\NEW BC & TCF STANDARDS.rvt


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

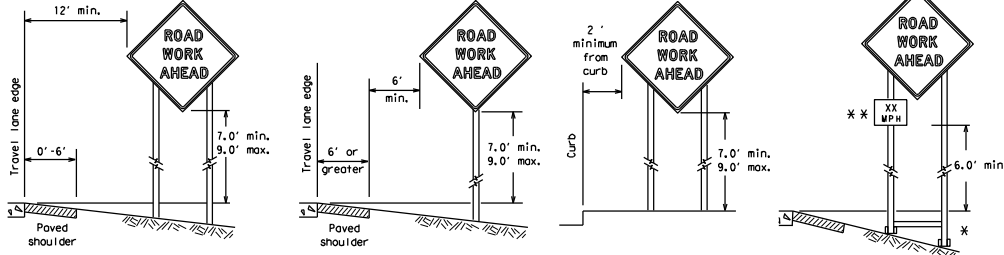

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the nearest sign.

ATTACHMENT FOR SIGN SUPPORTS

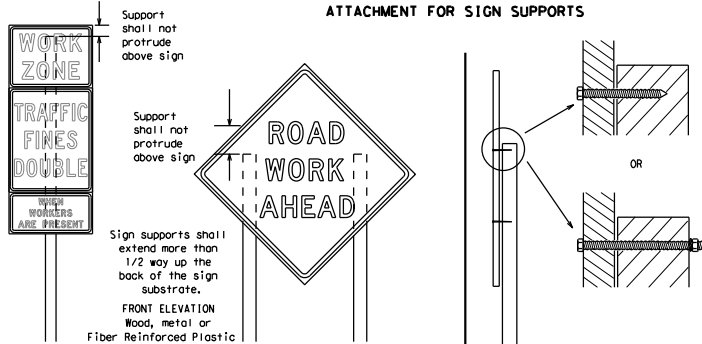

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any changes in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - Long-term stationary - work that occupies a location more than 3 days.
 - Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - Short, duration - work that occupies a location up to 1 hour.
 - Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIGN SIZES

- The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_L, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor studs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS


- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, coarseness sand shall be used and shall be tied shut to keep the sand from spilling and to maintain a constant weight.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign supports.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as fire inner tubes) shall NOT be used.
- Rubber balls used for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

- Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

STOP/SLOW PADDLES

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflective when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.



SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _L OR C _L SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (L000), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to item 502.



BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) - 21

FILE#	DC-21.dgn	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT
REV#	001	DATE	09/27/02	REV#	002	DATE	06/29/04	REV#	003
BY	LFK	DATE	09-07	BY	LFK	DATE	08-14	BY	LFK
CHECKED		DATE	07-13	CHECKED		DATE	05-21	CHECKED	
JOB	001	COUNTY	POLK	JOB	001	COUNTY	POLK	JOB	001
HIGHWAY		SHEET NO.	8	HIGHWAY		SHEET NO.	8	HIGHWAY	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by the author of this standard or other persons for the accuracy, results or damages resulting from the use of this standard. Plans 6429-94-001, 6429-94-002, 6429-94-003, 6429-94-004, 6429-94-005, 6429-94-006, 6429-94-007, 6429-94-008, 6429-94-009, 6429-94-010, 6429-94-011, 6429-94-012, 6429-94-013, 6429-94-014, 6429-94-015, 6429-94-016, 6429-94-017, 6429-94-018, 6429-94-019, 6429-94-020, 6429-94-021, 6429-94-022, 6429-94-023, 6429-94-024, 6429-94-025, 6429-94-026, 6429-94-027, 6429-94-028, 6429-94-029, 6429-94-030, 6429-94-031, 6429-94-032, 6429-94-033, 6429-94-034, 6429-94-035, 6429-94-036, 6429-94-037, 6429-94-038, 6429-94-039, 6429-94-040, 6429-94-041, 6429-94-042, 6429-94-043, 6429-94-044, 6429-94-045, 6429-94-046, 6429-94-047, 6429-94-048, 6429-94-049, 6429-94-050, 6429-94-051, 6429-94-052, 6429-94-053, 6429-94-054, 6429-94-055, 6429-94-056, 6429-94-057, 6429-94-058, 6429-94-059, 6429-94-060, 6429-94-061, 6429-94-062, 6429-94-063, 6429-94-064, 6429-94-065, 6429-94-066, 6429-94-067, 6429-94-068, 6429-94-069, 6429-94-070, 6429-94-071, 6429-94-072, 6429-94-073, 6429-94-074, 6429-94-075, 6429-94-076, 6429-94-077, 6429-94-078, 6429-94-079, 6429-94-080, 6429-94-081, 6429-94-082, 6429-94-083, 6429-94-084, 6429-94-085, 6429-94-086, 6429-94-087, 6429-94-088, 6429-94-089, 6429-94-090, 6429-94-091, 6429-94-092, 6429-94-093, 6429-94-094, 6429-94-095, 6429-94-096, 6429-94-097, 6429-94-098, 6429-94-099, 6429-94-100.

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS shall contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible. The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each. Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the table.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTRN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLRS
High Occupancy	HOV	Tuesday	TUES
Vehicle	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Warning	WARN
ITS	ITS	Wednesday	WED
Junction	JCT	Weight Limit	WT LIMIT
Left	LFT	West	W
Left Lane	LFT LN	Westbound	(route) W
Lane Closed	LN CLOSED	Wet Pavement	WET PVMT
Lower Level	LR LEVEL	Will Not	WONT
Maintenance	MAINT		

roadway designation = IH-number, US-number, SH-number, FM-number

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

Phase 1: Condition Lists

Road/Lane/Ramp Closure List		Other Condition List	
FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED	ROADWORK XXX FT	ROAD REPAIRS XXXX FT
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT	FLAGGER XXXX FT	LANE NARROWS XXXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT	RIGHT LN CLOSED XXXX FT	TWO-WAY TRAFFIC XX MILE
RIGHT X LANES CLOSED	RIGHT X LANES OPEN	MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
CENTER LANE CLOSED	DAYTIME LANE CLOSURES	LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED	DETOUR X MILE	ROUGH ROAD XXXX FT
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE	ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
EXIT CLOSED	RIGHT LN TO BE CLOSED	BUMP XXXX FT	US XXX EXIT X MILES
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI	TRAFFIC SIGNAL XXXX FT	LANES SHIFT *
XXXXXXXX BLVD CLOSED			

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List	Location List	Warning List	** Advance Notice List
MERGE RIGHT	AT FM XXXX	SPEED LIMIT XX MPH	TUE-FRI XX AM - X PM
DETOUR NEXT X EXITS	BEFORE RAILROAD CROSSING	MAXIMUM SPEED XX MPH	APR XX - X PM-X AM
USE EXIT XXX	NEXT X MILES	MINIMUM SPEED XX MPH	BEGINS MONDAY
STAY ON US XXX SOUTH	PAST US XXX EXIT	ADVISORY SPEED XX MPH	BEGINS MAY XX
TRUCKS USE US XXX N	WATCH FOR TRUCKS	RIGHT LANE EXIT	MAY X-X XX PM - XX AM
WATCH FOR TRUCKS	EXPECT DELAYS	USE XXX TO FM XXXX	USE CAUTION
EXPECT DELAYS	PREPARE TO STOP	DRIVE SAFELY	XX AM TO XX PM
REDUCE SPEED XXX FT	END SHOULDER USE	DRIVE WITH CARE	NEXT TUE AUG XX
USE OTHER ROUTES	WATCH FOR WORKERS		TONIGHT XX PM - XX AM
STAY IN LANE *			

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

Traffic Safety Division

BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)


BC (6) - 21

FILE#	DC-21.dgn	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT	DATE	TxDOT
REV#	November 2002	CONT	SECT	JOB	US 59, ETC.	DIST	COUNTY	SHEET NO.	10
9-07	8-14	6429	94	001		LFK	POLK		
7-13	5-21								

DISCLAIMER: This standard is approved by the Texas Engineering, Precast, Inc. No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 1/5/2023 11:02:52 AM
 FILE: TRAFFIC/MAINT/Contracts/00-RMC - Routine Maintenance Contracts/VP23 Plans/6429-94-001 Polk M&F Repair/000VSTD/TRAFFIC/NEW BC & TCP STANDARDS.dwg

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

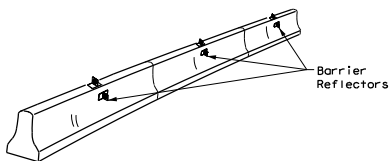

CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.




LOW PROFILE CONCRETE BARRIER (LPCB)

LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

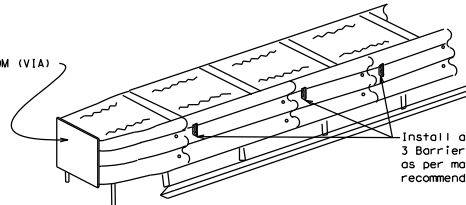

DELINEATION OF END TREATMENTS


END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTC List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B₁₀ or C₁₀ Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.



Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS

- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.




Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTC.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

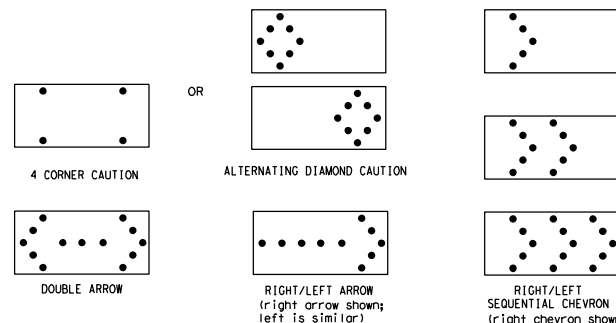

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage.
- The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTC for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTC for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



Texas Department of Transportation
Traffic Safety Division Standard


BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC (7) - 21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DR: TxDOT	EX: TxDOT
REV: 02 November 2002	CONT: 6429	SECT: 94	JOB: 001	HIGHWAY: US 59, ETC.
9-07 8-14	DIST: LFK	COUNTY: POLK	SHEET NO.:	
7-13 9-21				


101

DISCONTINUED
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units. This standard is not to be construed as a contract. For more information, contact the Texas Department of Transportation, 12000 North Loop West, Houston, Texas 77067, (713) 696-6000.

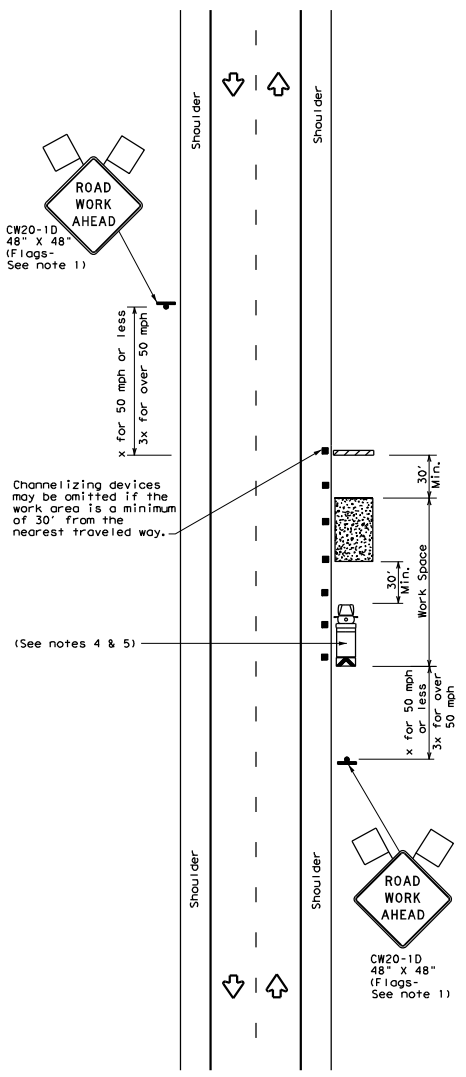


TCP (2-1a)

WORK SPACE NEAR SHOULDER
Conventional Roads

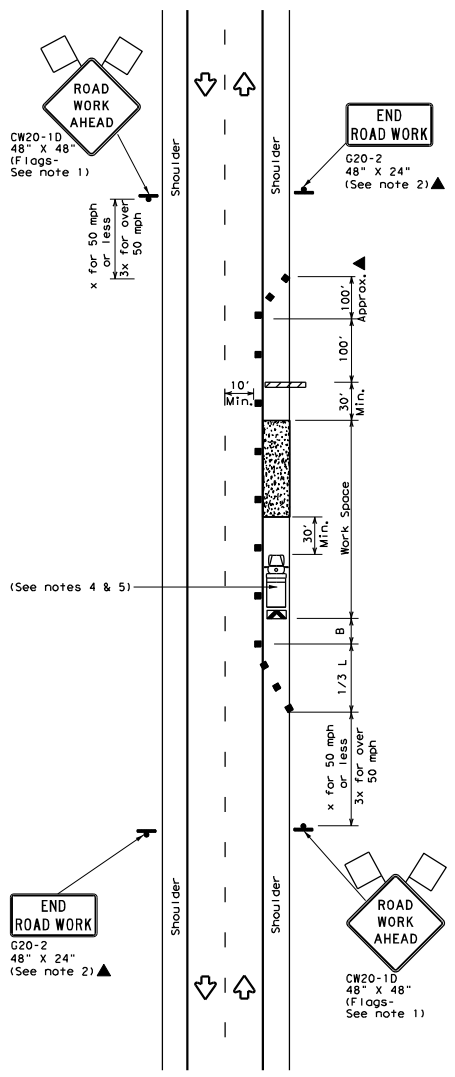

TCP (2-1b)

WORK SPACE ON SHOULDER
Conventional Roads

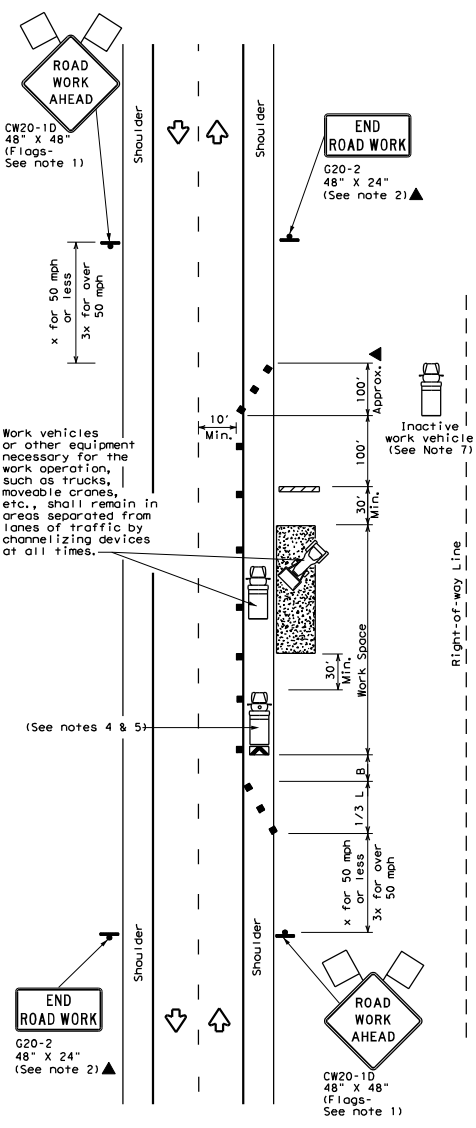

TCP (2-1c)

WORK VEHICLES ON SHOULDER
Conventional Roads


LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * X	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing * Distance	Suggested Longitudinal Buffer Space * B
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	$L = WS$	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the plans, or for routine maintenance work, when approved by the Engineer.
 - Stockpiled material should be placed a minimum of 30 feet from nearest traveled way.
 - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.





TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK

TCP (2-1) - 18

FILE#	tcp2-1-18.dgn	DATE	08/11/94	BY	LFK	CHECKED	001	JOB	US 59, ETC.	ROADWAY
REVISED	December 1985	CONT	6429	SECT	94	COUNTY	POLK	SHEET NO.	17	
2-94	4-98									
8-95	2-12									
1-97	2-18									

DISCUSSION: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units.

DATE: 1/5/2023 11:02:56 AM
 FILE: T:\L\FKDM\Main\Contract\03-RMC - Routine Maintenance\Contract\03-RMC - Routine Maintenance\Traffic Control\TCP (2-2).dgn

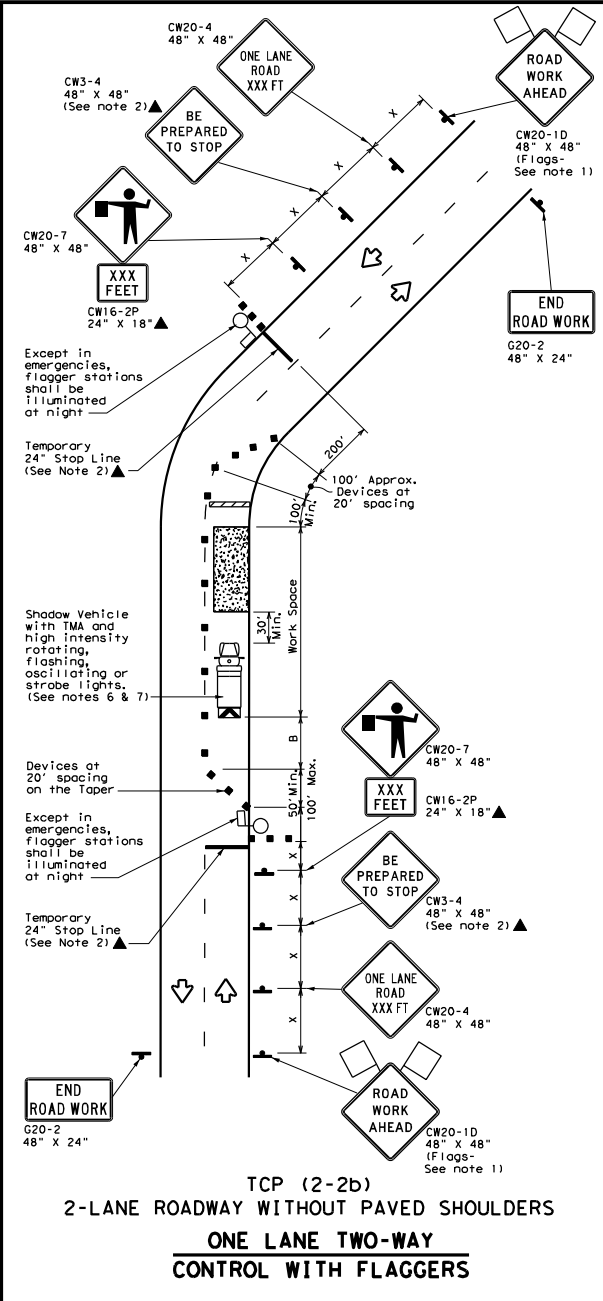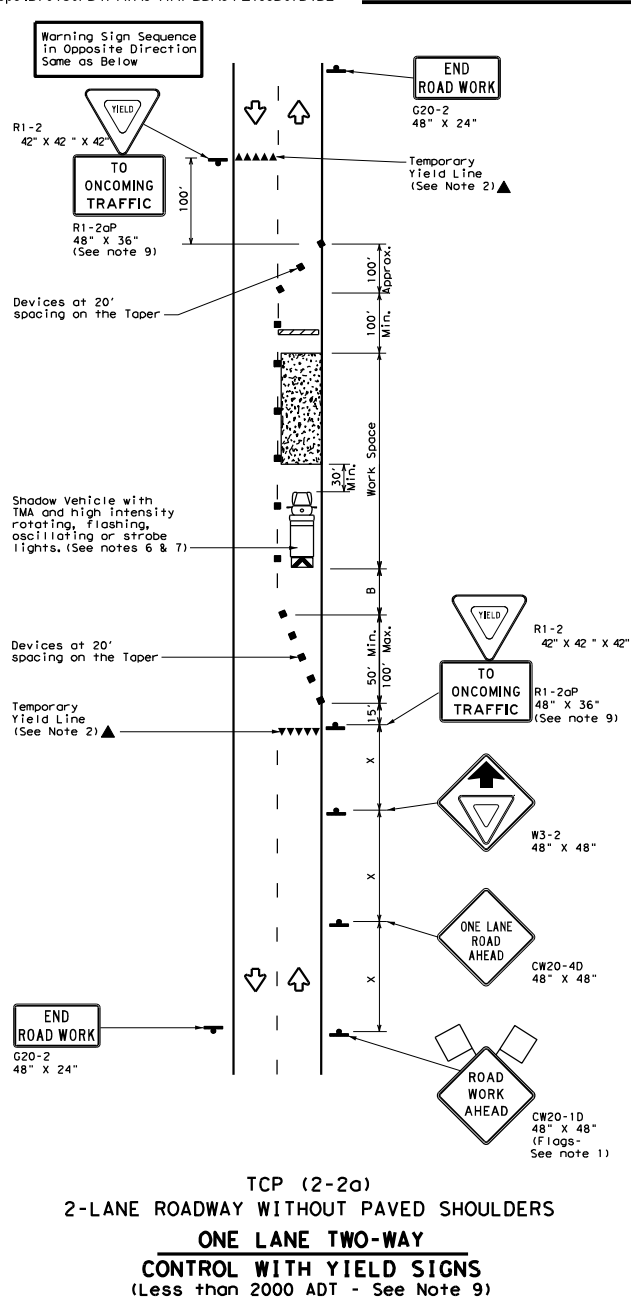

LEGEND

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Sign		Portable Changeable Message Sign (PCMS)
	Flag		Traffic Flow
			Flagger

Posted Speed * L	Formula S	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "b"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	WS ² 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L=WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4 "ONE LANE ROAD XXX FT" sign, but proper sign spacing shall be maintained.
 - Flaggers should use two-way radios or other methods of communication to control traffic.
 - Length of work space should be based on the ability of flaggers to communicate.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
- TCP (2-2a)**
- The R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work space should be no longer than one half city block. In rural areas, roadways with less than 2000 ADT, work space should be no longer than 400 feet.
 - The R1-2aP "YIELD TO ONCOMING TRAFFIC" sign shall be placed on a support of a 7 foot minimum mounting height.
- TCP (2-2b)**
- Channelizing devices on the center line may be omitted when a pilot car is leading traffic and approved by the Engineer.
 - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain stopping sight distance to the flagger and a queue of stopped vehicles. (See table above)
 - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

Traffic Operations Division Standard



TRAFFIC CONTROL PLAN
ONE-LANE TWO-WAY
TRAFFIC CONTROL

TCP (2-2) - 18

FILE: tcp2-2-18.dgn	DATE: December 1985	CONTRACT: 6429	SECTION: 94	JOB: 001	COUNTY: US 59	SHEET NO.: ETC.
REVISED:		DATE:	BY:	BY:	BY:	BY:
8-95	3-03	1-97	2-12	4-98	2-18	
LFK				POLK		18

1162

DISCONTINUED
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units.
 DATE: 1/5/2023 11:02:58 AM
 FILE: TR-11-FKDDMMainrnt_Contracts\0_RMC - Routine Maintenance Contracts\1223 of this length\001.dwg

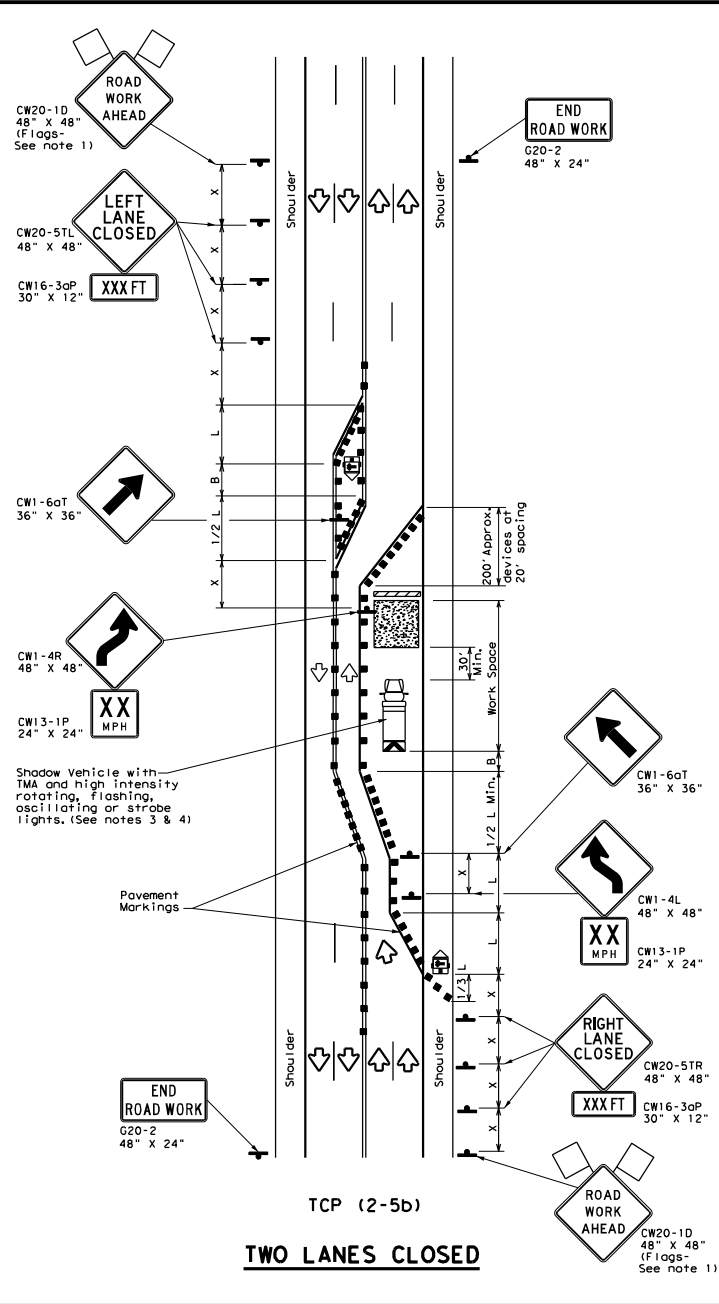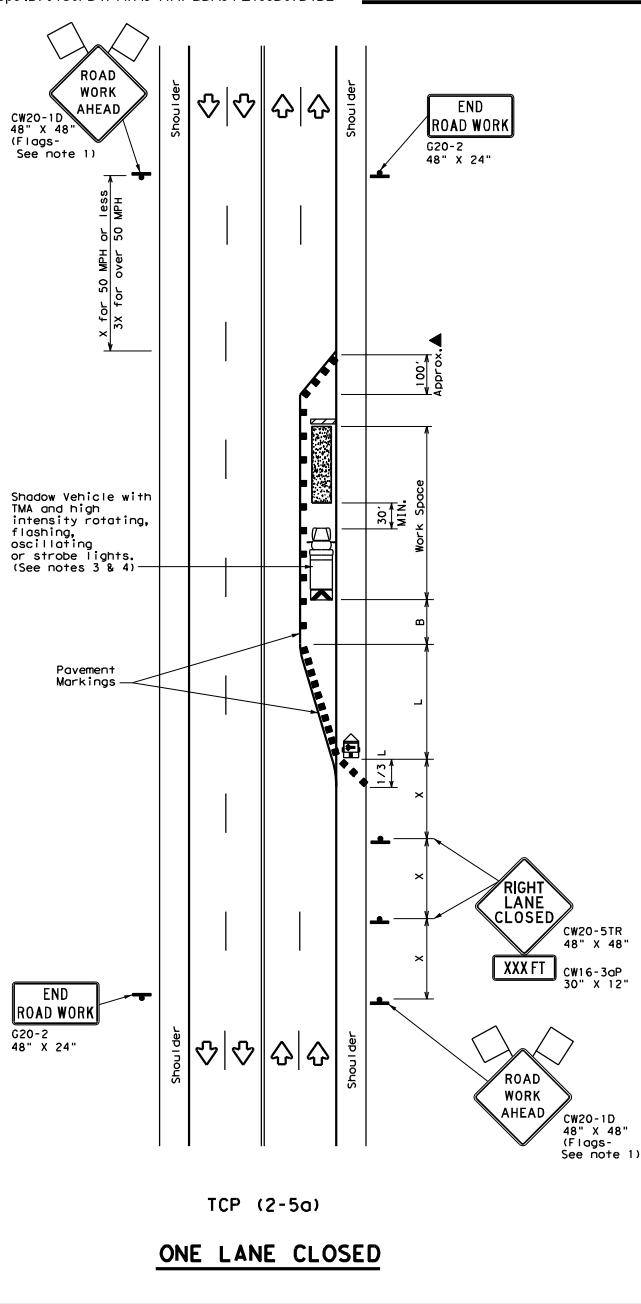

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * X	Formula L = WS ² 60	Minimum Desirable Taper Lengths * * *			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30		150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L-Length of Taper (FT) W-Width of Offset(FT) S-Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
			✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.
 - The downstream taper is optional. When used, it should be 100 feet approximately per lane, with channelizing devices spaced at 20 feet.
- TCP (2-5a)**
- If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline to protect the work space from opposing traffic, with the arrow board placed in the closed lane near the end of the merging taper.
- TCP (2-5b)**
- Conflicting pavement markings shall be removed for long-term projects.

Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
 LONG TERM LANE CLOSURES
 MULTILANE CONVENTIONAL RDS.

TCP (2-5) - 18


FILE: tcp2-5-18.dgn	DATE: 12/29/95	DATE: 01/04/94	DATE: 01/04/94	DATE: 01/04/94
© TxDOT	REVISIONS	CONT	SECT	HIGHWAY
8-95	2-12	6429	94	001
1-97	3-03			
4-98	2-18			
		DIST	COUNTY	SHEET NO.
		LFK	POLK	21

1165


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units. The user of this standard is responsible for the accuracy of the information contained herein.

Warning sign and rumble strip sequence in opposite direction is same as below.

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	> 4,500	2
1/4 Mile	< 3,500	1
	> 3,500	2
1/2 Mile	< 2,600	1
	> 2,600	2
1 Mile	< 1,600	1
	> 1,600	2
> 1 Mile	N/A	2

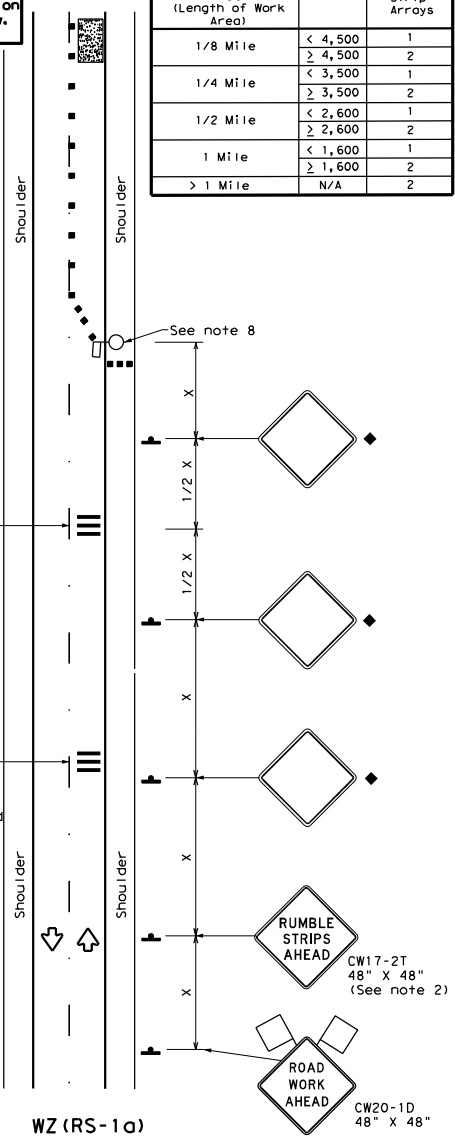

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

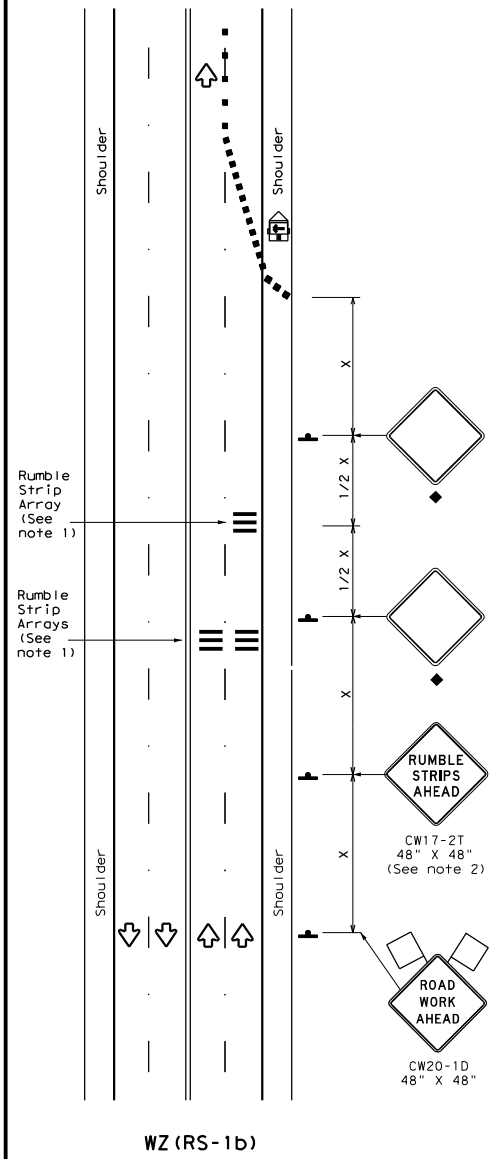

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35' +

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance	Suggested Longitudinal Buffer Space
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40	L = WS	265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50	L = WS	500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60	L = WS	600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	L = WS	700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT)
 S=Posted Speed(MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.

* For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.


Texas Department of Transportation
 Traffic Safety Division Standard

TEMPORARY RUMBLE STRIPS


WZ (RS) - 22

FILE: wzrs22.dgn	DATE: TxDOT November 2012	CONT: 6429	SECT: 94	JOB: 001	US 59, ETC.
REVISIONS: 2-14 4-16	1-22	DIST: LFK	COUNTY: POLK	SHEET NO. 23	

DATE: 1/5/2023
 FILE: T:\L\FKDM\Main\ Contracts\0-RMC - Routine Maintenance Contracts\1723 P.lans\6429-94-001 Polk MBGF RMC 6429-94-001 Polk MBGF Repair\DDN\STD\STANDARDS\NewMBGF & SGT Standard.dwg

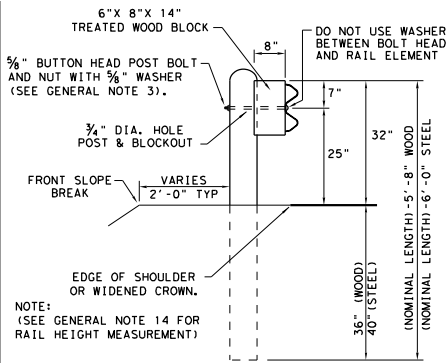


TYPICAL POST PLACEMENT

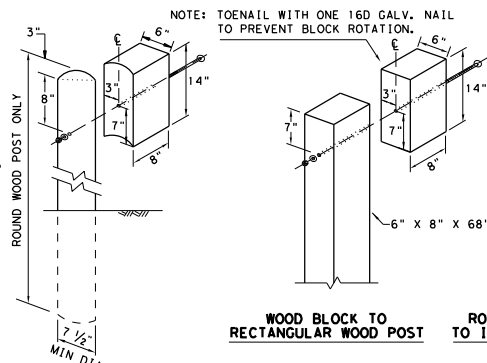


WOOD BLOCK TO ROUND WOOD POST

NOTE: ** "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

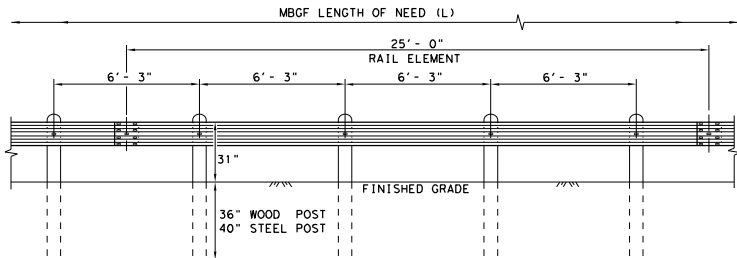

ELEVATION MID-SPAN RAIL SPLICE


SHOWING A 25' - 0" SECTION OF W-BEAM RAIL. (SEE GENERAL NOTE 2)

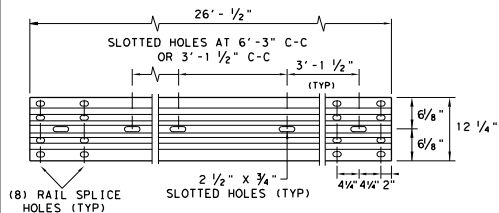

ELEVATION 25' - 0" (NOM.) W-BEAM SECTION

NOTES: SEE GENERAL NOTE 2 FOR ALLOWABLE RAIL TYPES. SEE RAIL SPLICE DETAIL FOR REQUIRED HARDWARE.

NOTE: FOUR TYPES OF BUTTON-HEAD GUARD RAIL BOLTS COME WITH A RECESSED NUT.




POST & BLOCK LENGTH

FBBO3 = 10"

FBBO4 = 18"

BUTTON HEAD BOLT

NOTE: SEE GENERAL NOTE 3 FOR SPLICE & POST BOLT DETAILS.

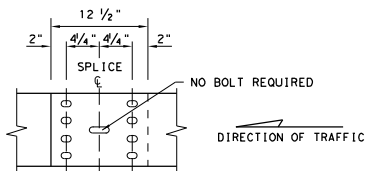


MID-SPAN RAIL SPLICE DETAIL

NOTE: GF (31), MID-SPAN RAIL SPLICES ARE REQUIRED WITH 6'-3" POST SPACINGS.

* POST(S) MAY REQUIRE FIELD MODIFICATION TO ENSURE PROPER GUARDRAIL HEIGHT.

12" x 12" x 1/4" (ASTM A36) STEEL BOTTOM PLATE WITH 1" DIA. HOLES REQUIRED WITH BOLT-THROUGH INSTALLATION.

LOW FILL CULVERT POST

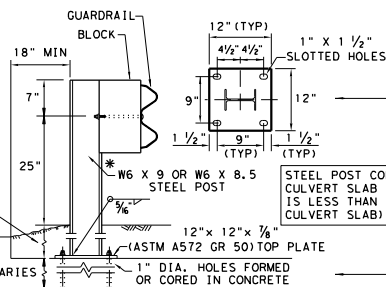

NOTE: TWO INSTALLATION OPTIONS.

1. **BOLT-THROUGH OPTION:** REQUIRES A 6" MIN. SLAB THICKNESS. 3/8" DIA (ASTM A449) HEAVY HEX BOLTS WITH TWO HARDENED WASHER EACH AND HEAVY HEX NUTS.

NOTE: BOLT LENGTH = SLAB PLUS 2 1/4" MIN.

2. **EPOXY ANCHOR OPTION:** THIS OPTION MAY ONLY BE USED IF THE CULVERT SLAB IS 9" MIN. THICK. THREADED ANCHOR RODS MUST BE 3/8" DIA. ASTM A449 OR A193 GRADE B7 WITH HEAVY HEX NUT, AND ONE HARDENED WASHER EACH. EMBED ANCHOR RODS 6" WITH HILTI HIT RE 500 EPOXY ADHESIVE. OTHER TYPE III CLASS C EPOXY ADHESIVES MEETING THE REQUIREMENTS OF DMS-6100, "EPOXIES AND ADHESIVES", MAY BE USED IF IT CAN BE DEMONSTRATED THAT THEY MEET OR EXCEED THE STRENGTH OF HILTI HIT RE 500 WITH THE SAME EMBEDMENT DEPTH AND THREADED ROD DIA. FOLLOW THE MANUFACTURER'S REQUIREMENTS FOR INSTALLING EPOXIED THREADED RODS. EXTEND RODS 1/4" MIN. BEYOND NUT.

NOTE: CULVERTS OF 25 FT. OR LESS, SEE GF (31)LS STANDARD FOR "LONG SPAN" OPTION.


GENERAL NOTES

- THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
- RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25' - 0", OR 12' - 6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE DOWNSTREAM ANCHOR TERMINAL (DAT) AND THE TRANSITION SECTIONS OF GUARDRAIL.
- BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/8" WASHER (FWC160) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
- FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
- CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
- THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
- IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
- UNLESS OTHERWISE SHOWN IN THE PLANS, GUARD FENCE PLACED IN THE VICINITY OF CURBS SHALL BE POSITIONED SO THAT THE FACE OF CURB IS LOCATED DIRECTLY BELOW OR BEHIND THE FACE OF THE RAIL. RAIL PLACED OVER CURBS SHALL BE INSTALLED SO THAT THE POST BOLT IS LOCATED APPROXIMATELY 25 INCHES ABOVE THE GUTTER PAN OR EDGE OF SHOULDER.
- APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. IF SOLID ROCK IS ENCOUNTERED WITHIN 0 TO 18" OF THE FINISHED GRADE, DRILL A 24" DIA. HOLE, 24" INTO THE ROCK. IF SOLID ROCK IS ENCOUNTERED BELOW 18", DRILL A 12" DIA. HOLE, 12" INTO THE ROCK OR TO THE STANDARD EMBEDMENT DEPTH, WHICHEVER MAYBE LESS. ANY EXCESS POST LENGTH, AFTER MEETING THESE DEPTHS, MAY BE FIELD CUT TO ENSURE PROPER GUARDRAIL MOUNTING HEIGHT. BACKFILL WITH COARSE AGGREGATE MATERIAL.
- POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
- SPECIAL FABRICATION WILL BE REQUIRED AT INSTALLATION LOCATIONS HAVING A CURVATURE OF LESS THAN 150 FT. RADIUS.
- UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TXDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210 ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
- FOR THE LOW FILL CULVERT OPTION, POSTS LOCATED PARTIALLY OR WHOLLY BETWEEN PRECAST BOX CULVERT UNITS, THE USE OF A CAST-IN-PLACE CONCRETE CLOSURE BETWEEN BOXES IS REQUIRED. THE LENGTH OF THE CAST-IN-PLACE CONCRETE CLOSURE SHALL ACCOMMODATE THE PLACEMENT OF THE LOW FILL CULVERT OPTION. SEE CONCRETE CLOSURE DETAILS ON BRIDGE STANDARD SCP-MD.
- GUARDRAIL HEIGHT MEASUREMENT: WHEN THE GUARDRAIL IS LOCATED ABOVE PAVEMENT, MEASURE THE HEIGHT FROM THE PAVEMENT TO THE TOP OF THE W-BEAM RAIL. WHEN THE GUARDRAIL IS LOCATED UP TO 2 FT. OFF OF THE EDGE OF PAVEMENT OR FOR A PAVEMENT OVERLAY, USE A 10-FOOT STRAIGHTEDGE TO EXTEND THE PAVEMENT/SLOPE TO THE BACK OF RAIL, MEASURE FROM THE BOTTOM OF STRAIGHTEDGE TO THE TOP OF RAIL. FOR GUARDRAIL LOCATED DOWN A 10:1 SLOPE, MEASURE FROM THE NOMINAL TERRAIN.

NOTE: TRANSITIONS TO BRIDGE RAILS OR TRAFFIC BARRIERS. SEE GF (31)TL3 TR STANDARD FOR HIGH-SPEED TL-3 TRANSITIONS. SEE GF (31)TL2 TR STANDARD FOR LOW-SPEED TL-2 TRANSITIONS.

		Design Division Standard	
METAL BEAM GUARD FENCE TL-3 MASH COMPLIANT GF (31)-19			
FILE: gf3119.dgn	DN: TXDOT	CR: KM	DR: VP
© TXDOT: NOVEMBER 2019	CONT SECT	JOB	HIGHWAY
REVISIONS	6429 94	001	US 59, ETC.
	DIST	COUNTY	SHEET NO.
	LFK	POLK	24


DATE: 1/5/2023
 FILE: T:\LKF\DM\mnt\ Contracts\0-RMC - Routine Maintenance Contracts\123 Plots\6429-94-001 Polk MBGF Repair\DDON\STD\STANDARDS\New\MBGF & SGT Standard.dwg
 DISCUSS: THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

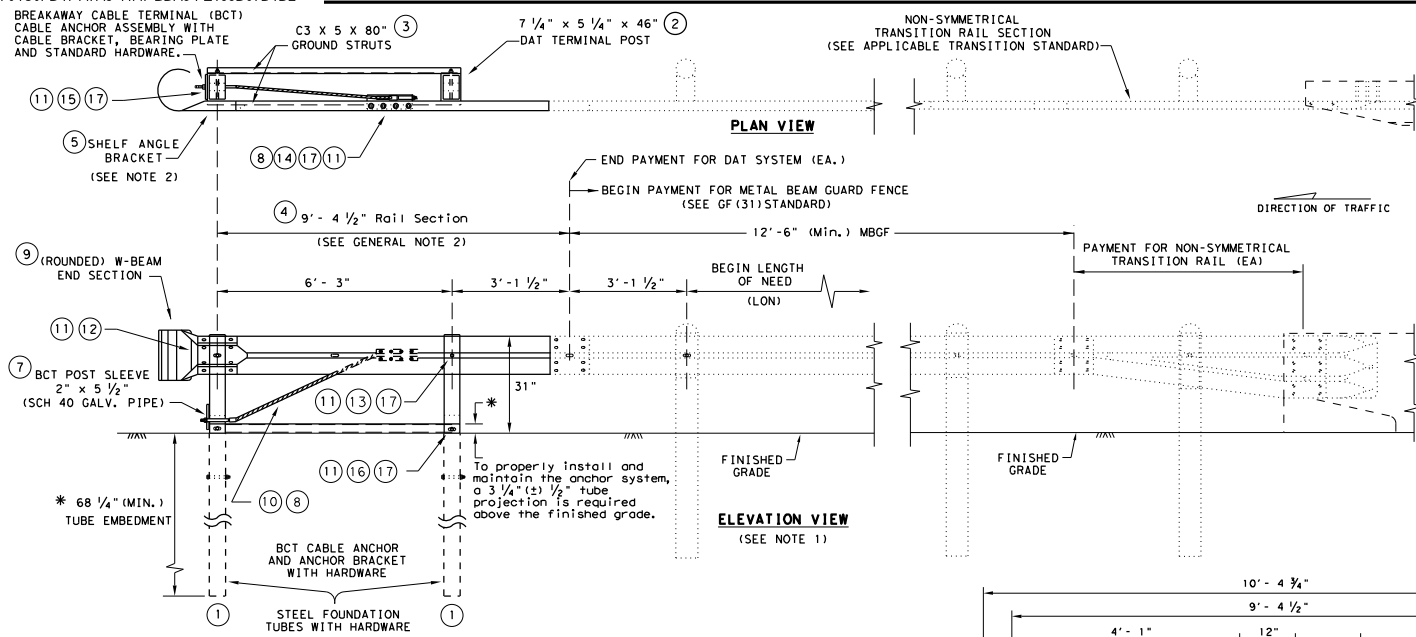







- GENERAL NOTES**
1. THE DETAIL SHOWN IS THE MINIMUM LENGTH OF NEED (LON) FOR A DOWNSTREAM ANCHOR TERMINAL (DAT) CONNECTED TO A CONCRETE RAIL.
 2. THE RAIL SECTION AT THE END POST IS SUPPORTED BY THE SHELF ANGLE BRACKET. THE RAIL ELEMENT IS NOT ATTACHED TO THE END POST.
 3. THE FOUNDATION TUBES SHALL NOT PROJECT MORE THAN 3 3/4" ABOVE THE FINISHED GRADE.
 4. ALL HARDWARE FOR DAT SHALL BE ASTM A307 UNLESS OTHERWISE SHOWN.
 5. REFER TO GF (31) SHEET FOR TERMINAL CONNECTION DETAILS.

MOW STRIP INSTALLATION
 IF A MOW STRIP IS REQUIRED WITH THE DAT INSTALLATION THE LEAVE-OUT AREA AROUND THE STEEL FOUNDATION TUBES AND THE TWO CHANNEL STRUTS MAY BE OMITTED. THIS WILL REQUIRE A FULL POUR AT THE FOUNDATION TUBES.

DOWNSTREAM ANCHOR TERMINAL (DAT)
 NOTE: ONLY FOR DOWNSTREAM USE, WHEN LOCATED OUTSIDE THE HORIZONTAL CLEARANCE AREA OF OPPOSING TRAFFIC.

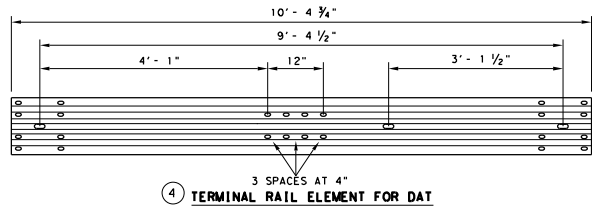


#	(DAT) PARTS LIST	QTY
1	STEEL FOUNDATION TUBE	2
2	DAT TERMINAL POST	2
3	CHANNEL STRUT	2
4	TERMINAL RAIL ELEMENT	1
5	SHELF ANGLE BRACKET	1
6	BCT BEARING PLATE	1
7	BCT POST SLEEVE	1
8	GUARDRAIL ANCHOR BRACKET	1
9	(ROUNDED) W-BEAM END SECTION	1
10	BCT CABLE ANCHOR	1
11	RECESSED NUT, GUARDRAIL	20
12	1 1/4" BUTTON HEAD BOLT	4
13	10" BUTTON HEAD BOLT	2
14	5/8" x 2" HEX HEAD BOLT	8
15	5/8" x 8" HEX HEAD BOLT	4
16	5/8" x 10" HEX HEAD BOLT	2
17	5/8" FLAT WASHER	18

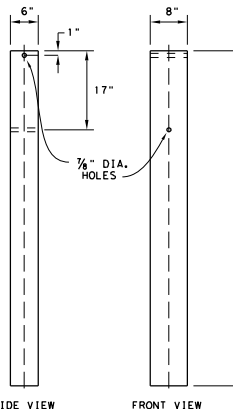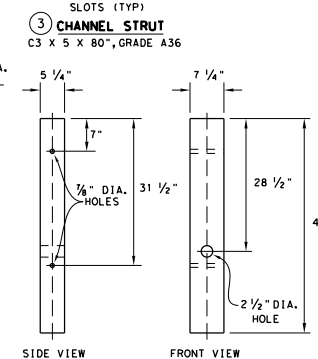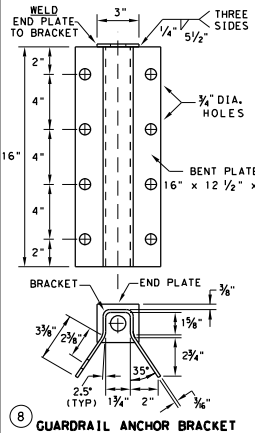

Design Division Standard
METAL BEAM GUARD FENCE (DOWNSTREAM ANCHOR TERMINAL) TL-3 MASH COMPLIANT GF (31) DAT-19

FILE: gf31dat19.dgn	DN: TxDOT	CR: KM	DR: VP	CR: CGL/AG
© TxDOT: NOVEMBER 2019	CONT SECT	JOB	HIGHWAY	
REVISIONS	6429 94	001	US 59, ETC.	
	DIST	COUNTY	SHEET NO.	
	LFK	POLK	25	


DATE: 1/5/2023
 FILE: I:\EKFDM\mnt\contracts\0-RMC - Routine Maintenance Contracts\1723 Plots\6429-94-001 Polk MBGF Repair\DDN\STD\STANDARDS\NewMBGF & SGT Standard.dwg
 DISCUSS: THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT" - NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

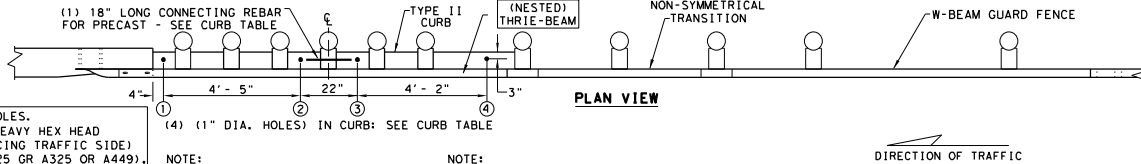

- (5) 1" DIA. HOLES.
- (5) 3/4" DIA. HEAVY HEX HEAD BOLTS (FACING TRAFFIC SIDE) (ASTM F3125 GR A325 OR A449).
- (10) 1 3/4" O.D. WASHER UNDER EACH HEX BOLT HEAD AND NUT.
- (5) 3/8" DIA. HEAVY HEX NUTS (ASTM A194 OR A563).

NOTE:
HEAVY HEX BOLT LENGTH WILL VARY DEPENDING ON WIDTH CONCRETE RAIL, LEAVE 1" OF BOLT LENGTH PAST THE 3/8" HEX NUT, TRIM AS REQUIRED.

NOTE:
CURB IS A REQUIRED COMPONENT FOR THE TRANSITION TO FUNCTION PROPERLY. SEE GENERAL NOTES: 2-4 AND 16-17.

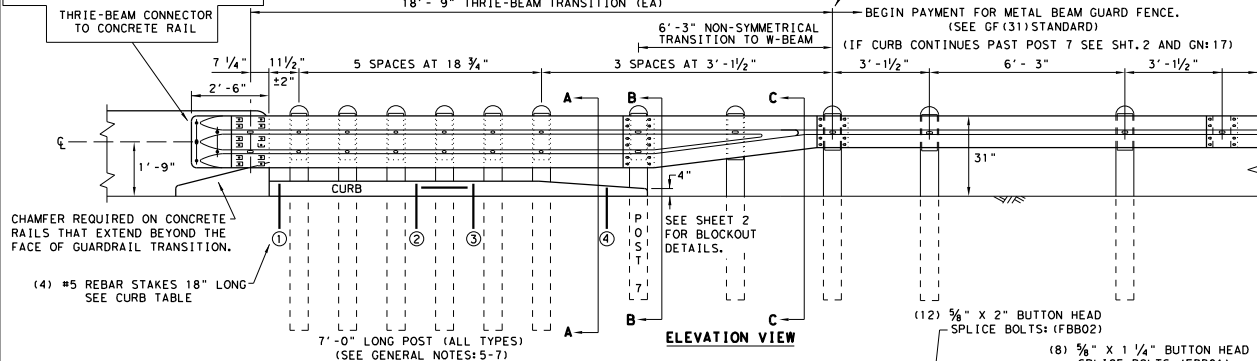



CHAMFER REQUIRED ON CONCRETE RAILS THAT EXTEND BEYOND THE FACE OF GUARDRAIL TRANSITION.

(4) #5 REBAR STAKES 18" LONG SEE CURB TABLE

SEE SHEET 2 FOR BLOCKOUT DETAILS.

(12) 3/8" X 2" BUTTON HEAD SPLICE BOLTS: (FBB02)

(8) 3/8" X 1 1/4" BUTTON HEAD SPLICE BOLTS: (FBB01)




- (12) 3/8" X 2" BUTTON HEAD SPLICE BOLTS WITH RECESSED NUTS: (FBB02)
- (12) RECTANGULAR GUARDRAIL PLATE WASHERS: (FWR03)

BRIDGE APPROACH - UPSTREAM: THE NESTED RAIL LAPS OVER THE TERMINAL CONNECTOR. PLATE WASHERS ARE INSTALLED UNDER THE SPLICE NUTS AGAINST INSIDE OF CONNECTOR.
 BRIDGE EXIT - DOWNSTREAM: THE TERMINAL CONNECTOR LAPS OVER THE NESTED RAIL. PLATE WASHERS ARE INSTALLED UNDER THE BOLT HEAD AGAINST OUTSIDE OF CONNECTOR.

PLATE WASHER INSTRUCTIONS

3/8" BUTTON HEAD POST BOLTS WITH 1 3/4" O.D. WASHER AND NUT.
 3/8" DIA. HOLE IN POST & BLOCKOUT.

NOTE: ONLY (1) 3/8" BOLT REQUIRED AT THIS POST LOCATION.

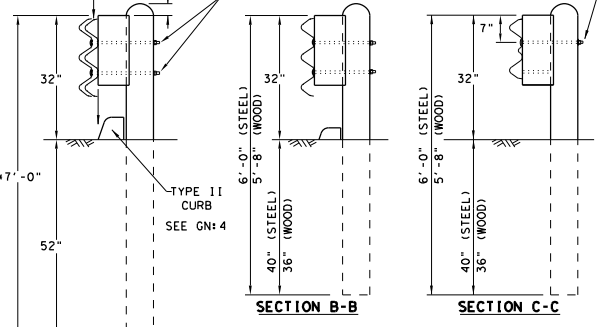


NOTE: ALL POST TYPES, SEE GENERAL NOTE: 5 & 6

NOTE: ** "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

THRIE-BEAM TERMINAL - CURB TABLE	
PRECAST CURB FULL LENGTH EQUALS 12'-2"	
THE PRECAST CURB MAY BE FORMED INTO TWO SECTIONS.	
CURB (1)	LENGTH 5'-8"
CURB (2)	LENGTH 6'-6"
TAPER CURB (2) TO A HEIGHT OF 4" AT POST 7	
CONNECTING PRECAST CURB SECTIONS (1) & (2):	
FORM OR CORE 1" DIA. HOLE 9" LONG INTO EACH CURB END. USE (1) #5 GR. 60 REBAR 18" LONG TO CONNECT BOTH CURBS.	
SECURING PRECAST OR CAST-IN-PLACE TO FINISHED GRADE "s":	
FORM OR CORE (4) 1" DIA. HOLES, SEE PLAN AND ELEVATION VIEWS FOR HOLE LOCATIONS. DRIVE (4) #5 GR. 60 REBAR STAKES 18" LONG INTO THE GROUND AND 1/2" BELOW TOP OF CURB.	
FILL HOLES WITH APPROVED GROUT MIXTURE.	

* NOTES: NOT NEEDED FOR CAST-IN-PLACE. SEE TYPE II CURB DETAIL FOR REBAR AND COVER REQUIREMENTS. PERCUSSION DRILLING IS NOT PERMITTED WITH TYPE II CURB, BRIDGE RAIL OR CONCRETE TRAFFIC RAIL.

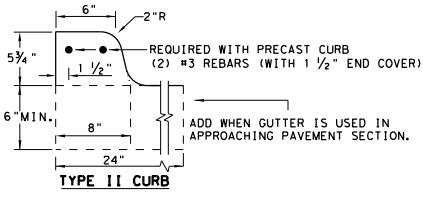


NOTE: OPTIONS FOR TYPE II CURB:
 1. PRECAST
 2. CAST-IN-PLACE

GENERAL NOTES

1. CONTACT THE DESIGN DIVISION FOR DRAINAGE CUT OUT OPTIONS NEEDED WITHIN THE CURB SECTION OF THE THRIE-BEAM TRANSITION. (512) 416-2678
2. CONCRETE CURB MAY BE CAST-IN-PLACE OR PRECAST AS SHOWN ON THIS SHEET. WHEN USED IN CONJUNCTION WITH THE THRIE-BEAM TRANSITIONS, CURB SHALL BE TYPE II (5'-8" HEIGHT); SEE CURRENT CCG STANDARD SHEET FOR FURTHER DETAILS. IF OTHER CURB HEIGHTS ARE SHOWN IN THE PLANS IN CONJUNCTION WITH THE TRANSITION, THE CURB HEIGHT MAY BE FROM 4" TO 8" WITH A RELATIVELY VERTICAL FACE. CONCRETE CURB SHALL BE CONTINUOUS TO THE SEVENTH POST UNLESS OTHERWISE SHOWN IN THE PLANS. SEE GENERAL NOTE: 17 FOR CIRCUMSTANCES WHERE CURB CONTIGUES PAST POST 7.
3. CONCRETE CURB TYPE II SUBSIDIARY TO "METAL BEAM GUARD FENCE TRANSITION". IF NO ADDITIONAL CURB IS INDICATED BEYOND THE TRANSITION, THEN ANY CURB HEIGHT GREATER THAN 4" WILL BE TAPERED DOWN BEGINNING AT THE LAST 7 FT. POST TO A MAXIMUM HEIGHT OF 4" AT POST 7. IF SHOWN ELSEWHERE IN THE PLANS, ADDITIONAL CURB UNDERNEATH GUARDRAIL WILL BE PAID FOR BY THE LINEAR FOOT.
4. UNLESS OTHERWISE SHOWN IN THE PLANS, TRANSITIONS SHALL BE PLACED WITH THE BLOCKOUT FACE IN FRONT OF OR DIRECTLY ABOVE THE CURB FACE. SEE SECTION A-A.
5. FOR ROUND WOOD POST SYSTEMS, ALL ROUND WOOD POSTS SHALL BE 7 1/2" DIA. MINIMUM THROUGHOUT THE THRIE-BEAM TRANSITION.
6. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. REFER TO GF (31) STANDARD SHEET.
7. THE POST LENGTH SHALL BE MARKED ON ALL 7'-0" LONG POSTS BY THE MANUFACTURER. THE MARK SHALL BE LOCATED WITHIN THE TOP 1 FT. REGION OF THE POST, AT LEAST 3/4" IN HEIGHT, AND VISIBLE AFTER INSTALLATION. WOODEN POSTS SHALL BE MARKED WITH A BRAND, AND STEEL POSTS WITH A STENCIL BEFORE GALVANIZING.
8. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
9. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE THRIE-BEAM TERMINAL CONNECTOR AND THE THRIE-BEAM TRANSITION TO W-BEAM SHALL BE OF THE SAME MATERIAL, BUT SHALL NOT BE LESS THAN 10 GAUGE. CONTRACTOR SHALL VERIFY THAT THE LOCATIONS OF BOLT HOLES MATCH THOSE IN THE THRIE-BEAM TERMINAL CONNECTOR PRIOR TO ORDERING MATERIALS.
10. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/8" WASHER (FWC16G) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
11. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
12. CROWN SHALL BE WIDENED TO ACCOMMODATE TRANSITIONS.
13. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
14. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. TxDOT'S MATERIALS AND TESTS DIVISION MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL CAN FURNISH COMPOSITE MATERIAL BLOCKS.
15. REFER TO GF (31) STANDARD SHEET & BRIDGE RAILING DETAILS FOR ADDITIONAL DETAILS.
16. THE INSTALLATION OF THE TYPE II CURB IS CRITICAL FOR THE PERFORMANCE OF THE THRIE-BEAM TRANSITION SYSTEM. THE CURB PREVENTS (VEHICLE WHEEL SNAGGING) AT THE CONCRETE RAIL AND IS REQUIRED TO MEET MASH CRASH TEST CRITERIA.
17. IF CURB EXTENDS BEYOND POST 7, 25' OF NESTED W-BEAM GUARDRAIL SHALL BE INSTALLED BEYOND THE PAY LIMITS OF THRIE-BEAM TRANSITION SECTION. (SEE SHT. 2). PAYMENT FOR THIS 25' SECTION WILL BE BY LINEAR FOOT, PAY ITEM "0540 6XXX MTL W-BEAM GD FEN (NESTED) (TIM POST)" OR "540 6XXX MTL W-BEAM GD FEN (NESTED) (STEEL POST)" AS APPLICABLE FOR POST TYPE. SEE SHT. 2 FOR ADDITIONAL INFORMATION.

HIGH-SPEED TRANSITION
SHEET 1 OF 2




METAL BEAM GUARD FENCE
THRIE-BEAM TRANSITION
TL-3 MASH COMPLIANT
GF (31) TR TL3-20


FILE: gf31tr+1320.dgn	DN: TxDOT	CR: KM	DR: VP	CR: CGL/AG
NOVEMBER 2020	CONT SECT	JOB	HIGHWAY	
REVISIONS	6429	94	001	US 59, ETC.
	DIST	COUNTY	POLK	SHEET NO.
	LFK			28

DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.
 DATE: 1/5/2023
 FILE: T:\LFK\DM\Main\Contract\0.RMC - Routine Maintenance Contracts\123 Plots\6429-94-001 Polk.MBGF.RMC 6429-94-001 Polk.MBGF.Repair\CONV\STD\STANDARDS\New\MBGF & SGT Standard.dwg


REQUIRED ALTERNATIVE FOR CONTINUOUS CURB EXTENDING PAST POST 7 (SEE SHT. 1 GENERAL NOTE 17)

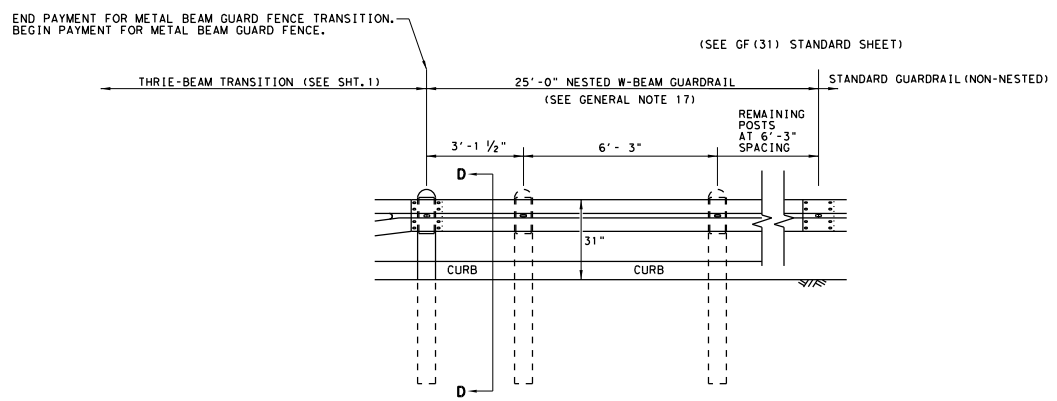

ELEVATION VIEW

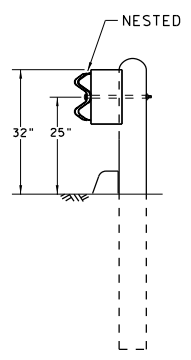

SECTION D-D

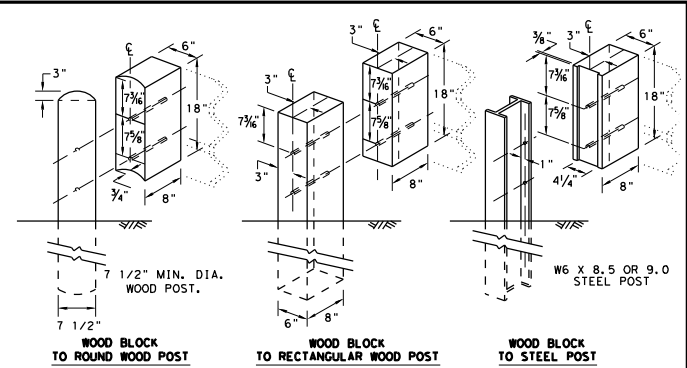

THRIE BEAM TRANSITION BLOCKOUT DETAILS

HIGH-SPEED TRANSITION

SHEET 2 OF 2




**METAL BEAM GUARD FENCE
THRIE-BEAM TRANSITION
TL-3 MASH COMPLIANT
GF (31) TR TL3-20**

FILE: g\31\tr\1320.dgn	DN: TxDOT	CK: KM	DR: KM	CK: CGL/AG
© TxDOT: NOVEMBER 2020	CONT SECT	JOB	HIGHWAY	
REVISIONS	6429 94	001	US 59, ETC.	
DIST	COUNTY		SHEET NO.	
LFK	POLK		29	



DATE: 1/5/2023 11:03:05 AM
 FILE: T:\LFK\DM\Main\Contracts\0-RMC - Routine Maintenance Contracts\123 Plans\6429-94-001 Polk MBGF.RMC

DISCLAIMER: This standard is covered by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

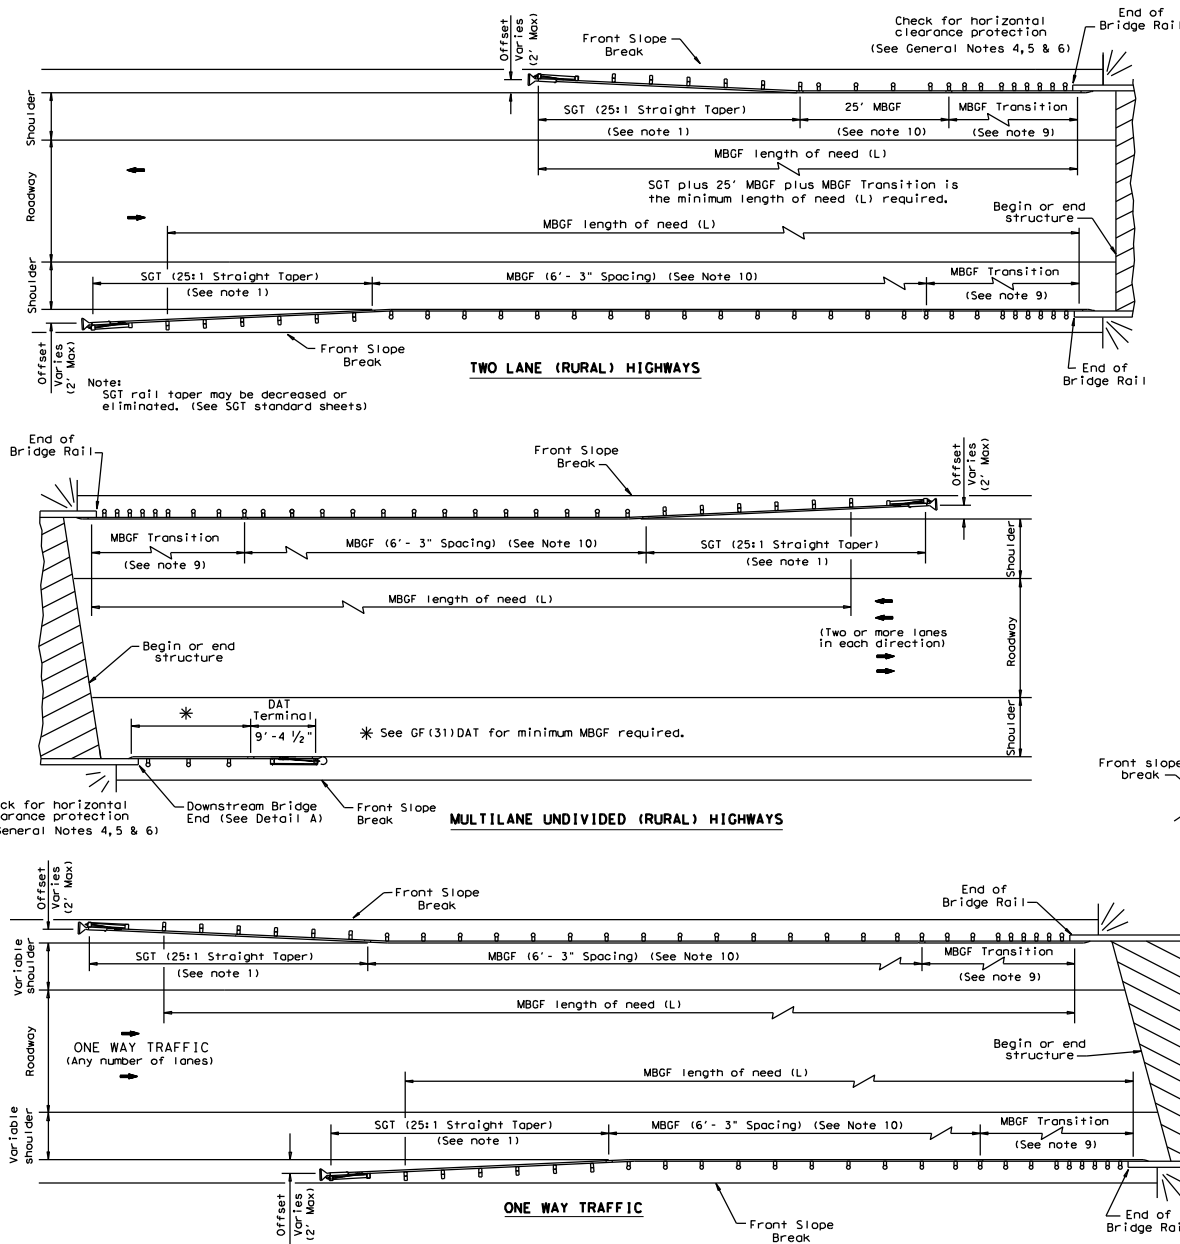

GENERAL NOTES


- For more detail: See GF (31), SGT (31), GF (31)TR, and GF (31)TL2 standard sheets.
- Quantities of metal beam guard fence (MBGF) at individual bridge ends are as shown in the plans.
- Use average daily traffic (ADT) for the current year to determine MBGF length of need in accordance with the Roadway Design Manual unless otherwise specified. Where significant traffic volume growth is anticipated on low volume (0-750 ADT) highways, use length determinations for the higher volume category.
- MBGF may not be required to shield departure end of bridge unless other obstacles within the horizontal clearance limits or opposing traffic indicate a MBGF consideration.
- Downstream anchor terminals (DAT) are only for downstream end anchorage use, outside the horizontal clearance area of opposing traffic.
- Direct connection of MBGF to concrete rails are only for downstream rail connections outside the horizontal clearance area of opposing traffic. (This requires a minimum of three standard line posts plus the DAT terminal, See Detail A)
- The crown shall be widened to accommodate MBGF. Typically the "front slope" break should be 2'-0" from the back of the MBGF post. This applies to new construction on new alignment or where existing roadway cross section is to be widened to increase roadway width. This does not apply to rehabilitation work where existing roadway crown width is to be retained (See Typical Cross Section of MBGF).
- For restrictive bridge widths: The MBGF should be properly transitioned from the existing bridge rail to the adjoining MBGF (See MBGF Transition Standards). Metal beam guard fence at these bridge location(s) shall be flared at the rate of 25:1 or flatter, and be of the length necessary to locate the terminal end at the 2 ft. "maximum" offset from the shoulder edge in the approach direction.
- Transition length and post spacing will vary depending on the transition type. Transition type will be shown elsewhere in the plans.
- A minimum 25' length of MBGF will be required.

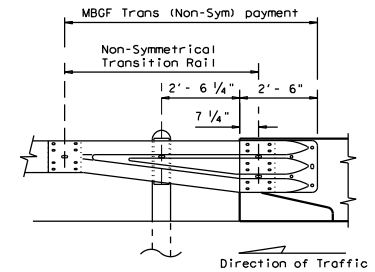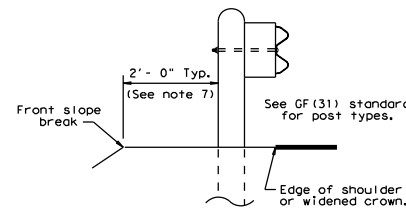


Note: All rail elements shall be lapped in the direction of adjacent traffic.

		Design Division Standard	
BRIDGE END DETAILS (METAL BEAM GUARD FENCE APPLICATIONS TO RIGID RAILS) BED-14			
FILE: bed14.dgn	DN: TxDOT	CR: AM	DN: BD/VP
© TxDOT: December 2011	CONT SECT	6429 94	JOB
REVISED APRIL 2015 REVISIONS		001	US 59, ETC.
DIST	COUNTY	LFK	SHEET NO.
		POLK	30


DATE: 1/5/2023
 FILE: I:\LEFKOW\Main\ Contracts\0-RMC - Routine Maintenance Contracts\1923 Plans\6429-94-001 Polk MBGF Repair\DDON\STD STANDARDS\NewMBGF & SGT Standard.dwg
 DISCLAIMER: This standard is covered by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

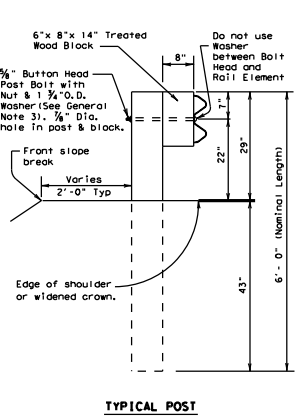


TYPICAL POST

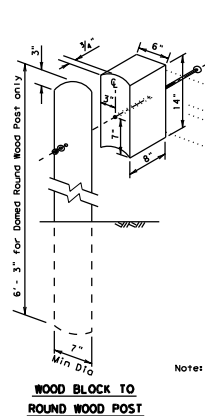


WOOD BLOCK TO RECTANGULAR WOOD POST




WOOD BLOCK TO STEEL POST




WOOD BLOCK TO STEEL POST

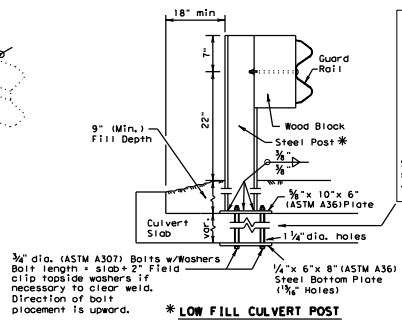


LOW FILL CULVERT POST FOR USE ON NON-BRIDGE CLASS CULVERTS ONLY



Steel post connection to culvert slab (use when there is less than 43" cover over culvert slab)




RAIL SPLICE DETAIL

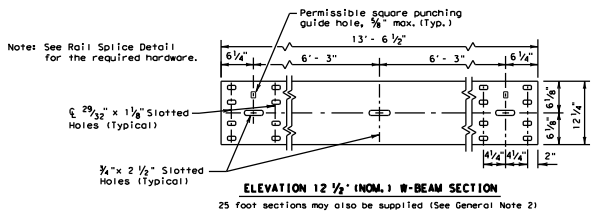

ELEVATION 12 1/2" (NOM.) W-BEAM SECTION


GENERAL NOTES

- The type of post (round wood post, rectangular wood post, or steel post) will be shown elsewhere in the plans. The exact position of MBGF shall be shown elsewhere in the plans or as directed by the Engineer. Steel posts to be galvanized in accordance with Item 445, "Galvanizing."
- Rail element shall meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified on the plans. The contractor may furnish rail elements of 12 1/2 or 25 foot nominal lengths.
- Button head "post" bolts (ASTM A307) shall be of sufficient length to extend through the full thickness of the nut (ASTM A563) and Type A (1 3/4" O.D.) washer and not more than 1" beyond it. Button head "splice" bolts (ASTM A307) are 7/8" x 1 1/4" (or 2" long at triple rail splices) with a 3/8" double recessed nut (ASTM A563).
- Fittings (bolts, nuts, and washers) shall be galvanized in accordance with Item 445, "Galvanizing." Fittings shall be subsidiary to the bid item.
- Crown shall be widened to accommodate the Metal Beam Guard Fence.
- The lateral approach to the guard fence, shall have a slope rate of not more than 1V:10H.
- Unless otherwise shown in the plans, guard fence placed in the vicinity of curbs shall be positioned so that the face of curb is located directly below or behind the face of the block. Rail placed over curbs shall be installed so that the post bolt is located approximately 21 inches above the gutter pan or roadway surface.
- If solid rock is encountered within 0 to 18" of the finished grade, drill a 22" dia. hole, 24" into the rock, or drill two 12" dia. front to back overlapping holes, 24" into the rock. If solid rock is encountered below 18", drill a 12" dia. hole, 12" into the rock or to the standard embedment depth, whichever is less. Any excess post length, after meeting these depths, may be field cut to ensure proper guardrail mounting height. Backfill with a cohesionless material.
- Posts shall not be set in concrete, of any depth.
- Special fabrication will be required at installations having a curvature of less than 150 ft. radius.
- The terminal anchor section (TAS) post shall be set in Class A concrete (unless otherwise shown in the plans) in accordance with Item 421, "Hydraulic Cement Concrete." Concrete shall be subsidiary to the bid item requiring construction of the terminal anchor section (TAS). Terminal anchor post to be galvanized in accordance with Item 445, "Galvanizing."
- Unless otherwise shown in the plans, a composite material post and/or block that meets the requirements of DMS-7210, "Composite Material Posts and Blocks for Metal Beam Guard Fence" may be substituted for posts and/or blocks of similar dimensions. The Construction Division, TxDOT maintains a Material Producer List (MPL) for producers of materials conforming to DMS-7210. Only producers on the MPL can furnish composite material posts and/or blocks.

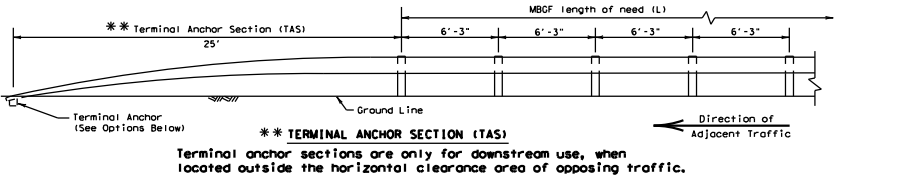


TERMINAL ANCHOR SECTION (TAS)

Terminal anchor sections are only for downstream use, when located outside the horizontal clearance area of opposing traffic.

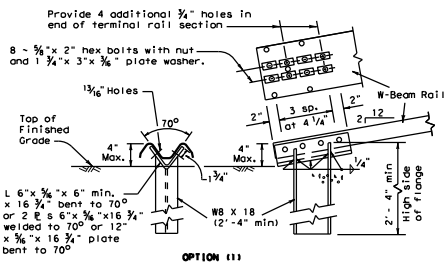

OPTION 11

Note: This anchor post requires four additional 3/4" holes (shop or field) in the rail member with eight 3/8" hex bolts with nut and plate washer.

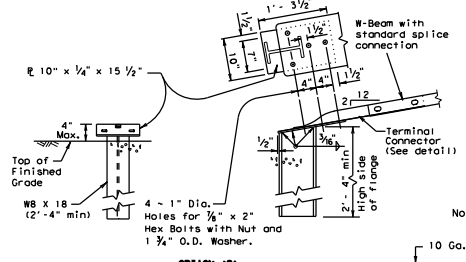

OPTION 12


Note: This anchor post requires the use of the 10 ga. terminal connector with four 7/8" hex bolts with nut and washer.

TERMINAL ANCHOR POST OPTIONS


Notes:
 Either concrete anchor may be used with either post option above.
 No construction joint is allowed in the concrete anchor.
 Terminal rail may be bolted to post and in twist position prior to placing concrete anchor.
 If concrete anchor is precast, the area should be compacted as directed by the Engineer, when placed in the field.

TERMINAL CONCRETE ANCHOR OPTIONS


(See General Note 11)



Place face of post approx. on ϵ of anchor



BUTTON HEAD BOLT Post and Splice Bolts (See General Note 3)

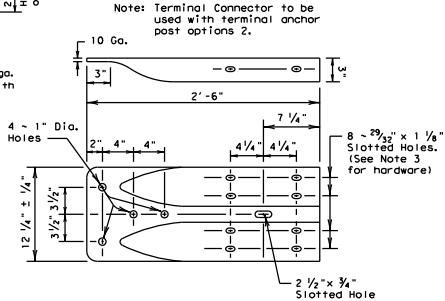






TERMINAL CONNECTOR

For connection hardware to concrete rails, see the MBGF transition standards.

ONLY FOR USE IN MAINTENANCE REPAIRS OR HIGHLY CONSTRAINED SITE CONDITIONS.

		Design Division Standard	
<h2>METAL BEAM GUARD FENCE</h2> <h3>MBGF - 19</h3>			
FILE: mdfg19.dgn	DN: TxDOT	CK: KM	DN: BD
REVISIONS	CONT: SECT	JOB: 001	HIGHWAY: US 59, ETC.
6429 94		COUNTY: POLK	SHEET NO. 31
DIST: LFK		COUNTY: POLK	

DISCUSS MBGF WITH DESIGNER. THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

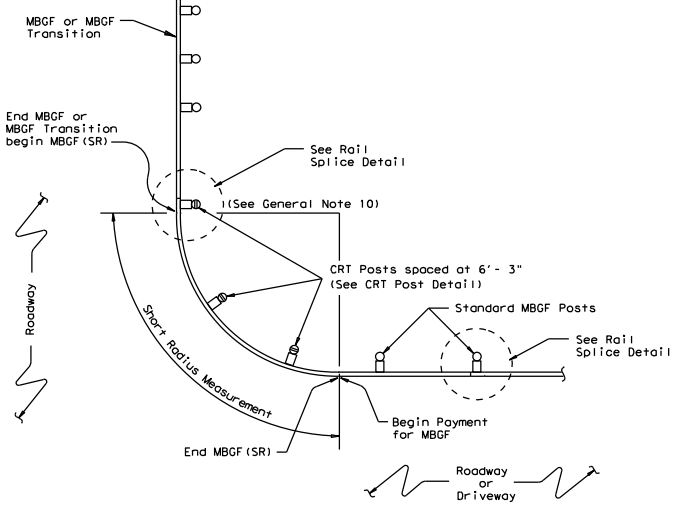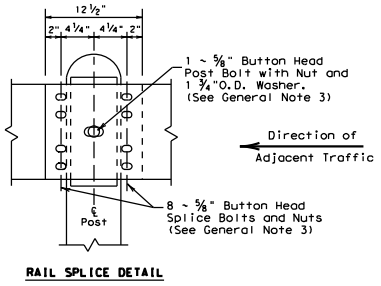
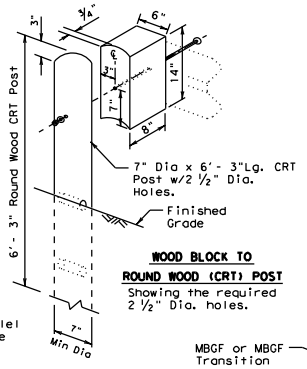
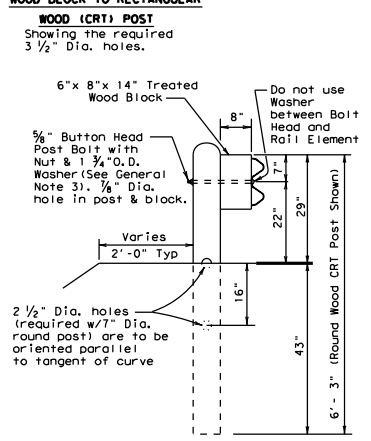
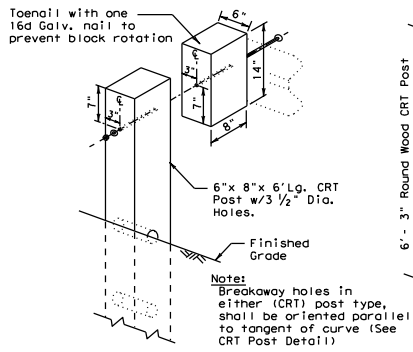


(CRT) POST DETAIL CONTROLLED RELEASE TERMINAL POST

Two or more wood CRT post(s) are required at any radius installation located at intersecting roadways or driveways.

"DRIVEWAY" TERMINAL ANCHOR SECTION

Only for use within driveway locations, where a standard (TAS) Terminal Anchor Section can not be installed.

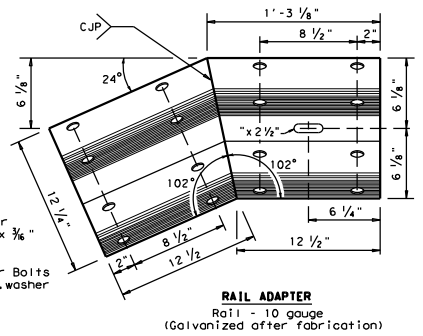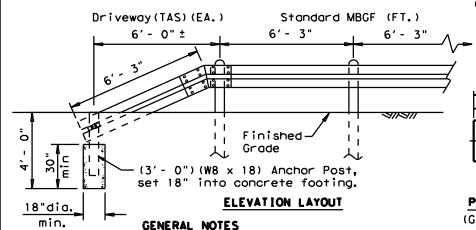

GENERAL NOTES

- The "Driveaway" Terminal Anchor Section is ONLY to be used within driveway locations, where the ROW is limited and a standard 25 ft. (TAS) Terminal Anchor Section, is too long.
- Terminal anchor post shall be set in Class A concrete.
- All steel shall be galvanized after fabrication in accordance with Item 445, "Galvanizing."

GENERAL NOTES

- The type of (CRT) post (round wood post, or rectangular wood post) will be shown elsewhere in the plans. The exact position of MBGF shall be shown elsewhere in the plans or as directed by the Engineer.
- Steel posts are not permitted at CRT post positions.
- Rail element shall meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified on the plans. The Contractor may furnish rail elements of 12 1/2 or 25 foot nominal lengths.
- Button head "post" bolts (ASTM A307) shall be of sufficient length to extend through the full thickness of the nut (ASTM A563) and Type A (1 3/4" O.D.) washer and not more than 1" beyond it. Button head "splice" bolts (ASTM A307) are 5/8" x 1 1/4" (or 2" long at triple rail splices) with a 5/8" double recessed nut (ASTM A563).
- Fittings (bolts, nuts, and washers) shall be galvanized in accordance with Item 445, "Galvanizing." Fittings shall be subsidiary to the bid item.
- Crown shall be widened to accommodate the Metal Beam Guard Fence.
- The lateral approach to the guard fence, shall have a slope rate of not more than 1V:10H.
- Unless otherwise shown in the plans, guard fence placed in the vicinity of curbs shall be positioned so that the face of curb is located directly below or behind the face of the block. Rail placed over curbs shall be installed so that the post bolt is located approximately 21 inches above the gutter pan or roadway surface.
- If solid rock is encountered within 0 to 18" of the finished grade, drill a 22" dia. hole, 24" into the rock, or drill two 12" dia. front to back overlapping holes, 24" into the rock. If solid rock is encountered below 18", drill a 12" dia. hole, 12" into the rock or to the standard embedment depth, whichever is less. Any excess post length, after meeting these depths, may be field cut to ensure proper guardrail mounting height. Backfill with a cohesionless material.
- Guardrail posts shall not be set in concrete, of any depth.
- Special rail fabrication will be required at installations having a curvature of less than 150 ft. radius. The required radius shall be shown on the plans.
- The terminal anchor section (TAS) post shall be set in Class A concrete (unless otherwise shown in the plans) in accordance with Item 421, "Hydraulic Cement Concrete." Concrete shall be subsidiary to the bid item requiring construction of the terminal anchor section (TAS). Terminal anchor post to be galvanized in accordance with Item 445, "Galvanizing."
- Unless otherwise shown in the plans, a composite material post and/or block that meets the requirements of DMS-7210, "Composite Material Posts and Blocks for Metal Beam Guard Fence" may be substituted for posts and/or blocks of similar dimensions. The Construction Division, TxDOT maintains a Material Producer List (MPL) for producers of materials conforming to DMS-7210. Only producers on the MPL can furnish composite material posts and/or blocks.

ONLY FOR USE IN MAINTENANCE REPAIRS OR HIGHLY CONSTRAINED SITE CONDITIONS.


Texas Department of Transportation
Design Division Standard

METAL BEAM GUARD FENCE (SHORT RADIUS) MBGF (SR) - 19


FILE: mbgfr19.dgn	DN: TxDOT	CR: KM	DR: BD	CR: VP
© TxDOT NOVEMBER 2019	CONT: 6429	SECT: 94	JOB: 001	HIGHWAY: US 59, ETC.
REVISIONS	DIST: LFK	COUNTY: POLK	SHEET NO.: 32	

DATE: 1/5/2023
 FILE: T:\LEF\KDM\mnt\contracts\0-RMC - Routine Maintenance\contracts\1923 Plans\6429-94-001 Polk MBGF Repair\DDN\STD STANDARDS\New\MBGF & SGT Standard.dgn

DISCUSS I.M.P.R. THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.
 DATE: 1/5/2023
 FILE: T:\LFDKDM\Main\ Contracts\0.RMC - Routine Maintenance Contracts\123 Plans\6429-94-001 Polk.MBGF.RMC 6429-94-001 Polk.MBGF.Repair\DDONVSTD\STANDARDS\New\MBGF & SGT Standard.dgn

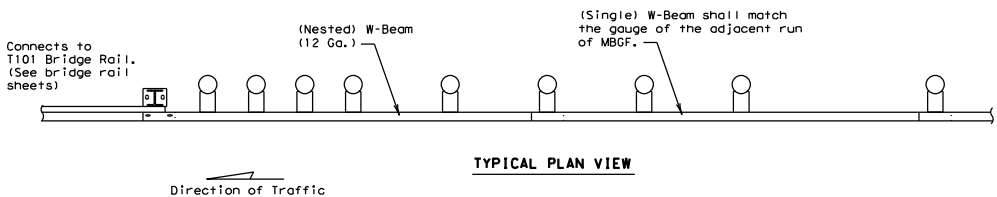

TYPICAL PLAN VIEW

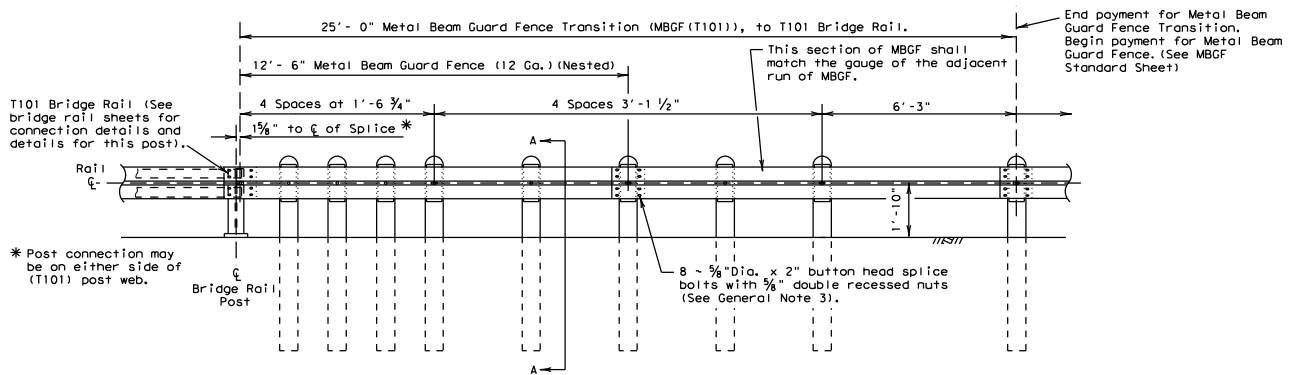


TYPICAL ELEVATION VIEW


* Post connection may be on either side of (T101) post web.

GENERAL NOTES


1. The type of post (round wood post, rectangular wood post, or steel post) will be shown elsewhere in the plans. The exact position of transitions shall be shown elsewhere in the plans or as directed by the Engineer.
2. Rail element shall meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified on the plans.
3. Button head "post" bolts (ASTM A307) shall be of sufficient length to extend through the full thickness of the nut (ASTM A563) and the Type A 1 3/4" O.D. washer and not more than 1" beyond it. Button head "splice" bolts (ASTM A307) are 5/8" x 2" (at triple rail splices) with a 3/8" double recessed nuts (ASTM A563).
4. Fittings (bolts, nuts, and washers) shall be galvanized in accordance with Item 445, "Galvanizing." Fittings shall be subsidiary to the bid item requiring construction of the transition.
5. Crown will be widened to accommodate transitions.
6. If solid rock is encountered. See the MBGF standard sheet for proper installation guidance.
7. Posts shall not be set in concrete.
8. Unless otherwise shown in the plans, a composite material post and/or block that meets the requirements of DMS-7210, "Composite Material Posts and Blocks for Metal Beam Guard Fence" may be substituted for posts and/or blocks of similar dimensions. The Construction Division, TxDOT, maintains a Material Producer List (MPL) for producers of materials conforming to DMS-7210. Only producers on the MPL can furnish composite material posts and/or blocks.
8. Refer to MBGF Standard Sheet for additional details.

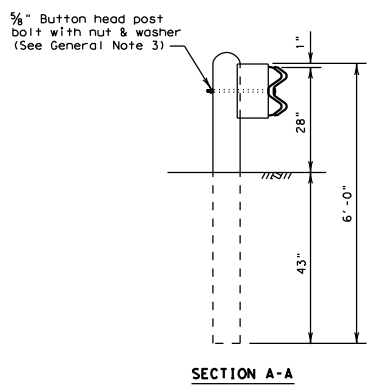


SECTION A-A

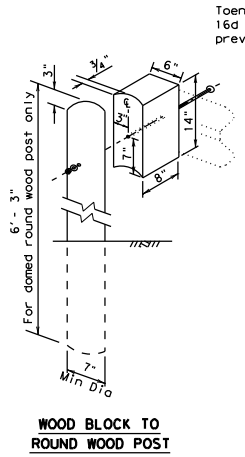

WOOD BLOCK TO ROUND WOOD POST



WOOD BLOCK TO RECTANGULAR WOOD POST






WOOD BLOCK TO STEEL POST

ONLY FOR USE IN MAINTENANCE REPAIRS.

		Design Division Standard	
METAL BEAM GUARD FENCE TRANSITION (T101) (T101 BRIDGE RAIL) MBGF (T101) -19			
FILE: mbgf110119.dgn	DN: TxDOT	CR: KM	DR: BD
© TxDOT NOVEMBER 2019	CONT SECT	JOB	HIGHWAY
REVISIONS	6429 94	001	US 59, ETC.
DIST	COUNTY	SHEET NO.	
LFK	POLK	33	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units.

DATE: 2/23/2023
 FILE: T:\LKFD\MAINT\ Contracts\0-RMC - Routine Maintenance Contracts\1223 of this language\031 - 8-12-2018\031-18\MBGF & SGT Standard

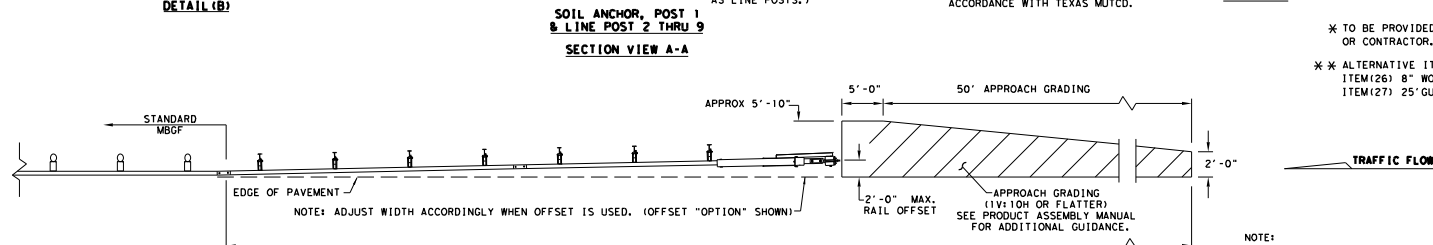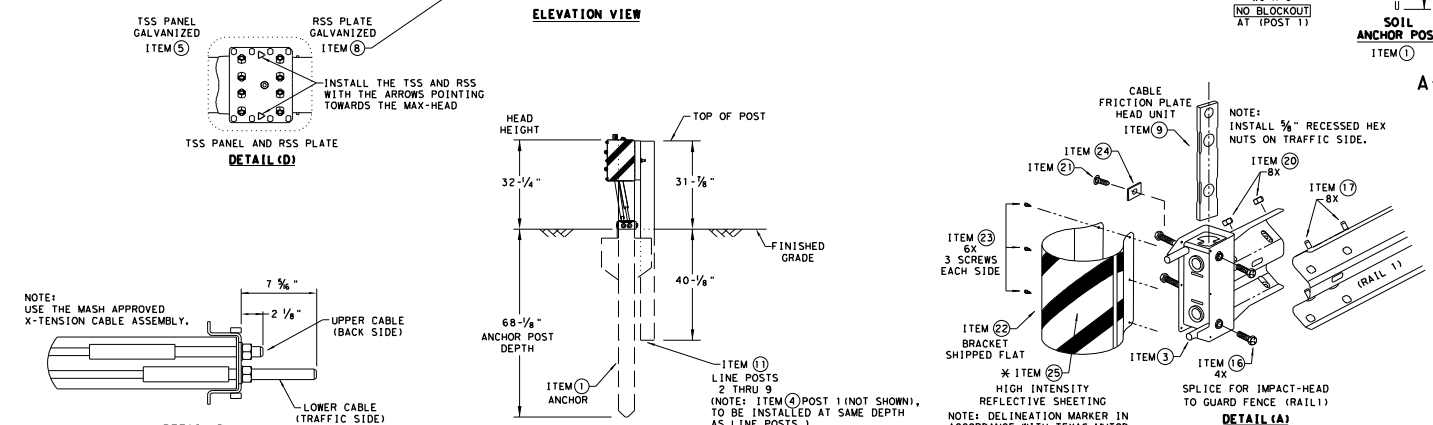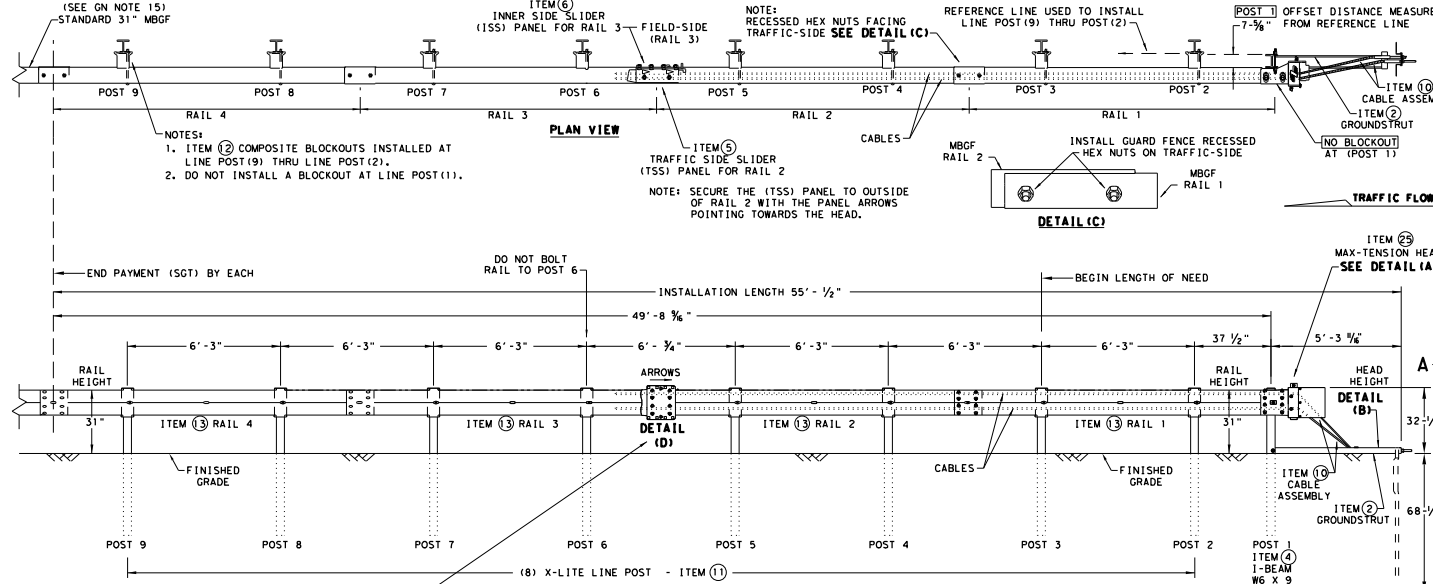

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800
 - FOR INSTALLATION, REPAIR, & MAINTENANCE REFER TO THE MAX-TENSION INSTALLATION INSTRUCTION MANUAL, P/N MANMAX REV D (ECN 3516).
 - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS, OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TxDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - ALL STEEL COMPONENTS ARE GALVANIZED PER ASTM A123 OR EQUIVALENT UNLESS OTHERWISE STATED.
 - SYSTEM SHOWN USING STEEL WIDE FLANGE POST WITH COMPOSITE BLOCKOUTS.
 - COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (IMPL) FOR CERTIFIED PRODUCERS.
 - REFER TO INSTALLATION MANUAL FOR SPECIFIC PANEL LAPPING GUIDANCE.
 - IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL FOR INSTALLATION GUIDANCE.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POST TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST.
 - MAX-TENSION SYSTEM SHALL NEVER BE INSTALLED WITHIN A CURVED SECTION OF GUARDRAIL.
 - IF A DELINEATION MARKER IS REQUIRED, MARKER SHALL BE IN ACCORDANCE WITH TEXAS MUTCD.
 - THE SYSTEM IS SHOWN WITH 12'-6" MBGF PANELS, 25'-0" MBGF PANELS ARE ALSO ALLOWED.
 - A MINIMUM OF 12'-6" OF 12GA. MBGF IS REQUIRED IMMEDIATELY DOWNSTREAM OF THE MAX-TENSION SYSTEM.

ITEM #	PART NUMBER	DESCRIPTION	QTY
1	BS1-1610060-00	SOIL ANCHOR - GALVANIZED	1
2	BS1-1610061-00	GROUND STRUT - GALVANIZED	1
3	BS1-1610062-00	MAX-TENSION IMPACT HEAD	1
4	BS1-1610063-00	W6x9 I-BEAM POST 6FT., GALVANIZED	1
5	BS1-1610064-00	TSS PANEL - TRAFFIC SIDE SLIDER	1
6	BS1-1610065-00	ISS PANEL - INNER SIDE SLIDER	1
7	BS1-1610066-00	TOOTH - GEOMET	1
8	BS1-1610067-00	RSS PLATE - REAR SIDE SLIDER	1
9	B061058	CABLE FRICTION PLATE - HEAD UNIT	1
10	BS1-1610069-00	CABLE ASSEMBLY - MASH X-TENSION	2
11	BS1-1012078-00	X-LITE LINE POST-GALVANIZED	8
12	B090534	8" W-BEAM COMPOSITE-BLOCKOUT XT110	8
13	BS1-4004386	12'-6" W-BEAM GUARD FENCE PANELS 12GA.	4
14	BS1-1102027-00	X-LITE SQUARE WASHER	1
15	BS1-2001886	3/8" x 7" THREAD BOLT HH (GR.5) GEOMET	1
16	BS1-2001885	3/4" x 3" ALL-THREAD BOLT HH (GR.5) GEOMET 4	1
17	4001115	3/8" x 1 1/2" GUARD FENCE BOLTS (GR.2)MGAL	48
18	2001840	3/8" x 10" GUARD FENCE BOLTS MGAL	8
19	2001636	3/8" WASHER F436 STRUCTURAL MGAL	2
20	4001116	3/8" RECESSED GUARD FENCE NUT (GR.2)MGAL	59
21	BS1-2001888	3/8" x 2" ALL THREAD BOLT (GR.5)GEOMET	1
22	BS1-1701063-00	DELINEATION MOUNTING (BRACKET)	1
23	BS1-2001887	1/4" x 3/4" SCREW SD HH 410SS	7
24	4002051	GUARDRAIL WASHER RECT AASHTO FWRO3	1
25	SEE NOTE BELOW	HIGH INTENSITY REFLECTIVE SHEETING	1
26	4002337	8" W-BEAM TIMBER-BLOCKOUT, POB018	8
27	BS1-4004431	25" W-BEAM GUARDRAIL PANEL, 8-SPACE, 12GA.	2
28	MANMAX Rev-(D)	MAX-TENSION INSTALLATION INSTRUCTIONS	1


* TO BE PROVIDED BY DISTRIBUTOR OR CONTRACTOR.
 ** ALTERNATIVE ITEMS NOT SHOWN.
 ITEM (26) 8" WOOD-BLOCKOUTS
 ITEM (27) 25" GUARD FENCE PANELS

Texas Department of Transportation
 Design Division Standard


**MAX-TENSION END TERMINAL
 MASH - TL-3
 SGT (11S) 31-18**

FILE: sgt11s3118.dgn DWN: TxDOT CK: KM DWN: TxDOT CK: CL
 © TxDOT: FEBRUARY 2018 CONT: SECT JOB: HIGHWAY
 REVISIONS:
 6429 94 001 US 59, ETC.
 DIST COUNTY SHEET NO.
 LFK POLK 35

DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE. FILE: T:\L\FKDM\mnt\Contracts\0-RMC - Routine Maintenance Contracts\123 Plots\6429-94-001 Polk MBGF Repair\DDON\STD\STANDARDS\NewMBGF & SGT Standard.dwg DATE: 2/23/2023

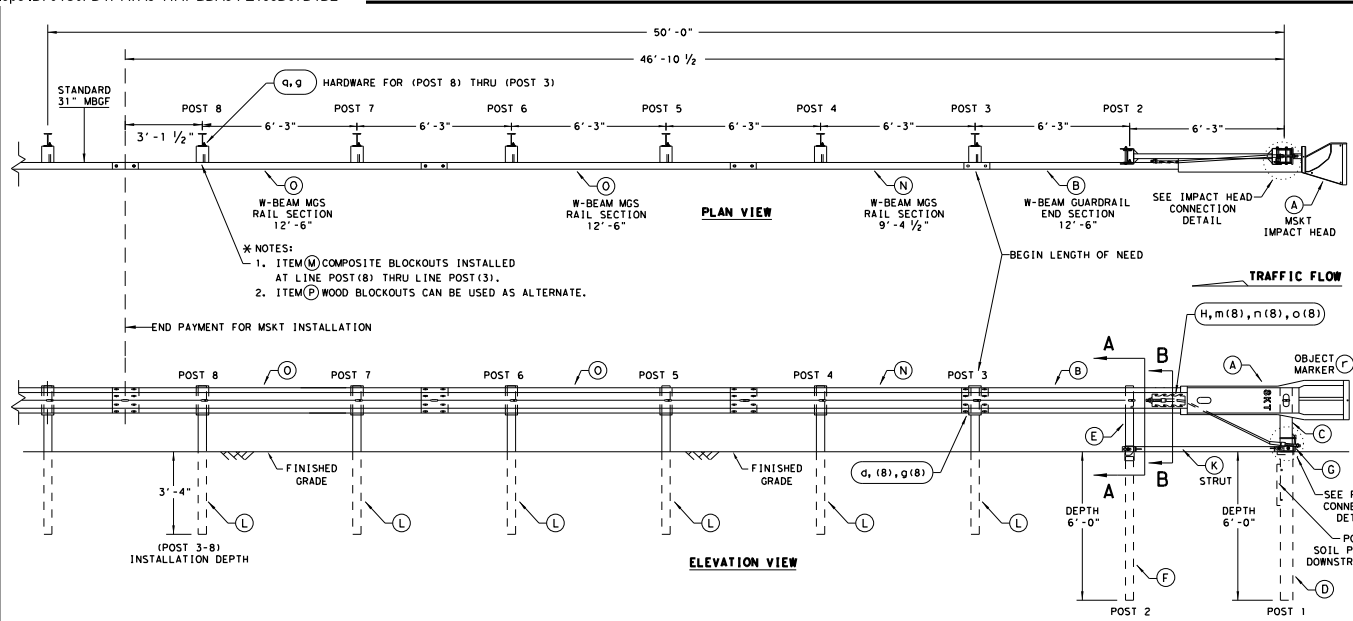

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
 - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
 - A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - SYSTEM MUST BE ATTACHED TO STANDARD 31" MBGF.
 - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
 - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRANCHING ON THE SHOULDER, THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
 - THE SYSTEM IS SHOWN WITH TWO 12'-6" MBGF PANELS, ONE 25'-0" MBGF PANEL IS ALSO ALLOWED IN THEIR PLACE.
 - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

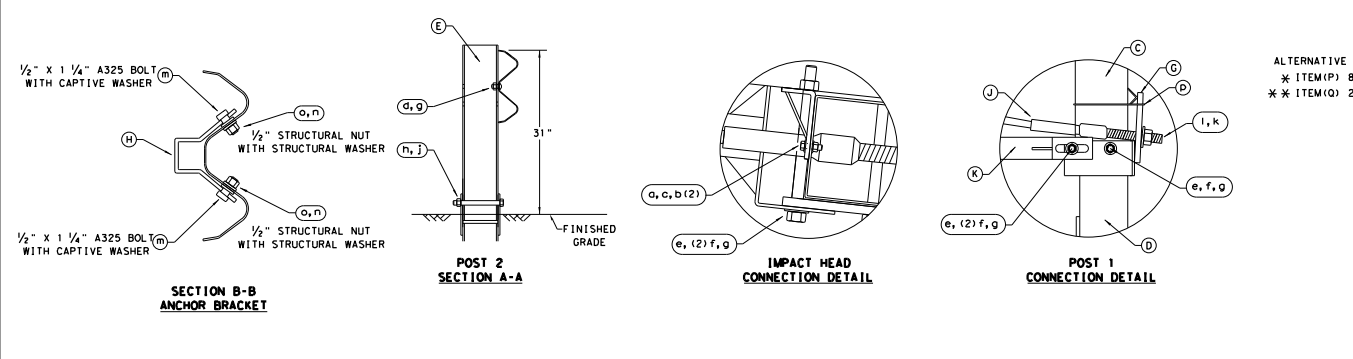


ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM NUMBERS
A	1	MSKT IMPACT HEAD	MS3000
B	1	W-BEAM GUARDRAIL END SECTION, 12 Gg.	SF1303
C	1	POST 1 - TOP (6" X 6" X 1/4" TUBE)	MTPHP1A
D	1	POST 1 - BOTTOM (6" W6X15)	MTPHP1B
E	1	POST 2 - ASSEMBLY TOP	UHP2A
F	1	POST 2 - ASSEMBLY BOTTOM (6" W6X9)	HP2B
G	1	BEARING PLATE	E750
H	1	CABLE ANCHOR BOX	S760
J	1	BCT CABLE ANCHOR ASSEMBLY	E770
K	1	GROUND STRUT	MS785
L	6	W6x9 OR W6x8.5 STEEL POST	P621
M	6	COMPOSITE BLOCKOUTS	CBSP-14
N	1	W-BEAM MGS RAIL SECTION (9'-4 1/2")	G12025
O	2	W-BEAM MGS RAIL SECTION (12'-6")	G1203A
P	6	WOOD BLOCKOUT 6" X 8" X 14"	P675
Q	1	W-BEAM MGS RAIL SECTION (25'-0")	G1209

SMALL HARDWARE			
o	2	3/4" x 1" HEX BOLT (GRD 5)	B5160104A
b	4	3/4" WASHER	W0516
c	2	3/4" HEX NUT	N0516
d	25	3/4" Dia. x 1 1/4" SPLICE BOLT (POST 2)	B580122
e	2	3/4" Dia. x 9" HEX BOLT (GRD A449)	B580904A
f	3	3/4" WASHER	W050
g	33	3/4" Dia. H.G.R. NUT	N050
h	1	3/4" Dia. x 8 1/2" HEX BOLT (GRD A449)	B340854A
i	1	3/4" Dia. HEX NUT	N030
k	2	1 ANCHOR CABLE HEX NUT	N100
l	2	1 ANCHOR CABLE WASHER	W100
m	8	1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER	SB12A
n	8	1/2" STRUCTURAL NUTS	NO12A
o	8	1 1/4" O.D. x 3/4" I.D. STRUCTURAL WASHERS	WO12A
d	1	BEARING PLATE RETAINER TIE	CT-1005T
q	6	3/4" x 10" H.G.R. BOLT	B581002
r	1	OBJECT MARKER 18" X 18"	E3151

NOTE: SEE (GENERAL NOTE 14) FOR DRIVING CAP INFORMATION.

SEE NOTES: *
 * ITEM (P) 8" WOOD-BLOCKOUT
 * ITEM (Q) 25' GUARD FENCE PANEL

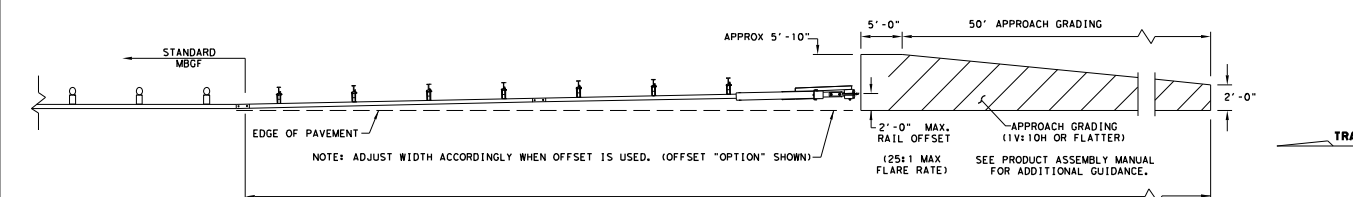

APPROACH GRADING AT GUARDRAIL END TREATMENTS

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

Texas Department of Transportation
 Design Division Standard







SINGLE GUARDRAIL TERMINAL

MSKT-MASH-TL-3

SGT (12S) 31-18

FILE: sg112s3118.dgn	DN:TXDOT	CR:KM	DW:VP	CK:CL
© TXDOT: APRIL 2018	CONT SECT	JOB	HIGHWAY	
REVISIONS	6429	94	001	US 59, ETC.
	DIST	COUNTY		SHEET NO.
	LFK	POLK		36

DISCUSS W/CR THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT" - NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.
 DATE: 2/23/2023 FILE: T:\L\FKDM\mnt\ Contracts\0-RMC - Routine Maintenance Contracts\1723 Plots\6429-94-001 Polk MBGF RMC 6429-94-001 Polk MBGF Repair\DDN\STD\STANDARDS\NewMBGF & SGT Standard.dwg

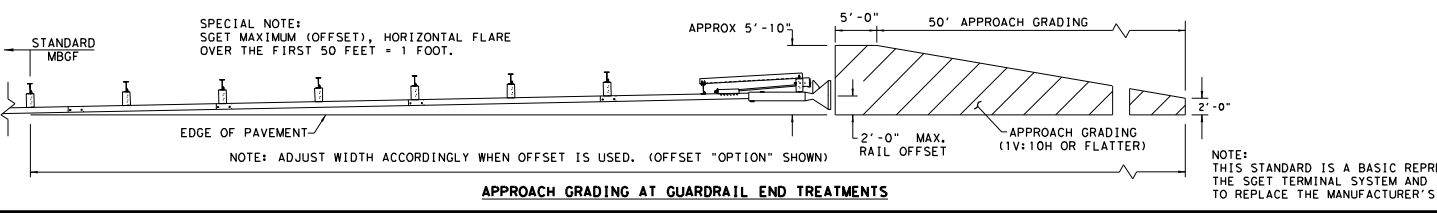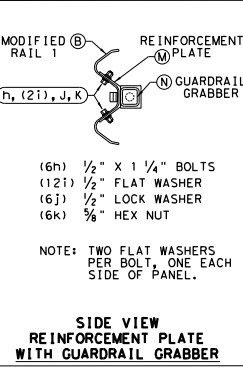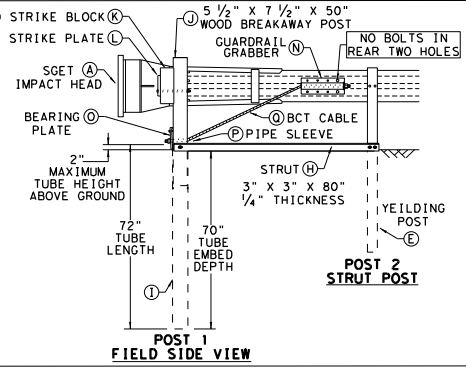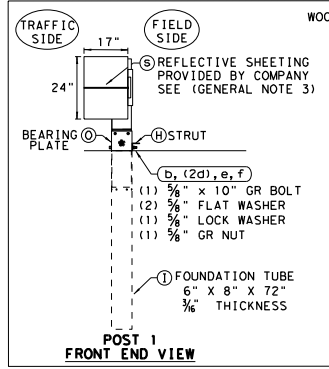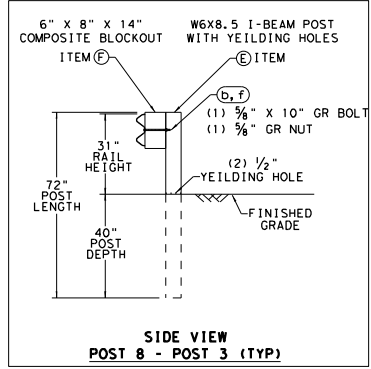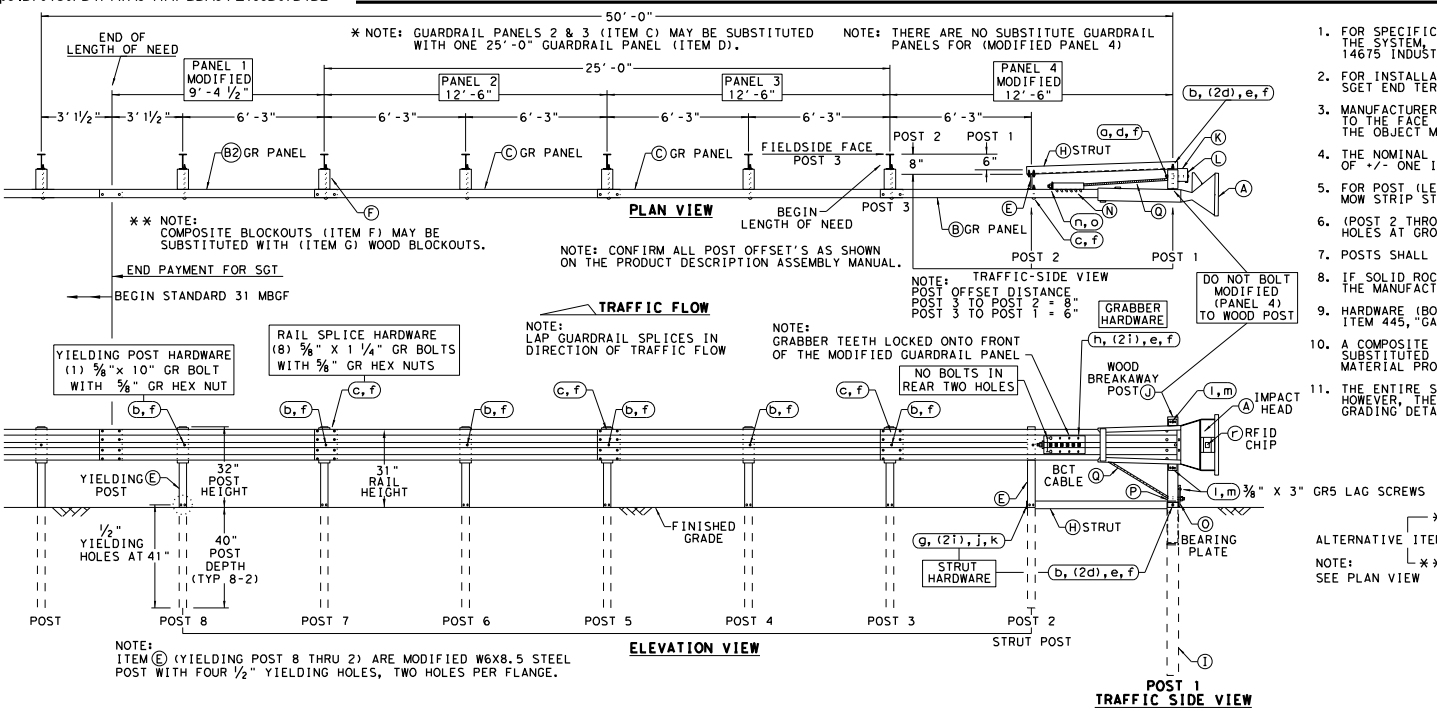

- ### GENERAL NOTES
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: SPIG INDUSTRY, INC. AT 1(267) 644-9510. 14675 INDUSTRIAL PARK RD; BRISTOL, VA 24202
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE MANUFACTURER'S SGT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL.
 - MANUFACTURER WILL APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" TO THE FACE PLATE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. THE OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCO.
 - THE NOMINAL HEIGHT OF THE GUARDRAIL BEAM IS 31 INCHES WITH A TOLERANCE OF +/- ONE INCH.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - (POST 2 THROUGH POST 8) ARE MODIFIED STEEL-YIELDING POSTS WITH YIELDING HOLES AT GROUND LEVEL, THERE ARE NO SUBSTITUTE POSTS.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - IF SOLID ROCK IS ENCOUNTERED FOR ANY OF THE POSTS IN THE SYSTEM, CONTACT THE MANUFACTURER FOR SPECIFIC INSTALLATION GUIDANCE.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - A COMPOSITE MATERIAL BLOCKOUT THAT MEETS OMS-7210 REQUIREMENTS MAY BE SUBSTITUTED FOR AN APPROVED WOOD BLOCKOUT. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - THE ENTIRE SYSTEM MUST BE INSTALLED IN A STRAIGHT LINE WITHOUT ANY CURVE. HOWEVER, THE SYSTEM CAN BE OFFSET BY TWO FEET AS SHOWN ON THE APPROACH GRADING DETAIL TO HELP OFF-SET THE IMPACT HEAD FROM SHOULDER OF THE ROAD.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM #
A	1	SGT IMPACT HEAD	SIH1A
B	1	MODIFIED GUARDRAIL PANEL 12'-6"	12GA
B2	1	MODIFIED GUARDRAIL PANEL 9'-4 1/2"	12GA
C	2	STANDARD GUARDRAIL PANEL 12'-6"	12GA
D	1	STANDARD GUARDRAIL PANEL 25'-0"	12GA
E	7	MODIFIED YIELDING I-BEAM POST W6x8.5	YPMOD
F	6	COMPOSITE BLOCKOUT 6" X 8" X 14"	CB08
G	6	WOOD BLOCKOUT 6" X 8" X 14"	WB08
H	1	STRUT 3" X 3" X 80" X 1/4" A36 ANGLE	STR80
I	1	FOUNDATION TUBE 6" X 8" X 72" X 3/8"	FND16
J	1	WOOD BREAKAWAY POST 5 1/2" X 7 1/2" X 50"	WBRK50
K	1	WOOD STRIKE BLOCK	WSBK14
L	1	STRIKE PLATE 1/4" A36 BENT PLATE	SPL18
M	1	REINFORCEMENT PLATE 12 GA. GR55	REPL117
N	1	GUARDRAIL GRABBER 2 1/2" X 2 1/2" X 16 1/2"	GRG17
O	1	BEARING PLATE 8" X 6 3/8" X 3/8" A36	BPL18
P	1	PIPE SLEEVE 4 1/2" X 2 3/8" O.D. (2 1/8" I.D.)	PSLV4
Q	1	BCT CABLE 3/2" X 81" LENGTH	CB181


ITEM	QTY	SMALL HARDWARE	ITEM #
Q	1	5/8" X 12" GUARDRAIL BOLT 307A HDG	12GRBLT
D	7	5/8" X 10" GUARDRAIL BOLT 307A HDG	10GRBLT
C	33	3/4" X 1 1/2" GR SPLICE BOLTS 307A HDG	1GRBLT
D	3	FLAT WASHER F436 A325 HDG	58FW436
E	1	LOCK WASHER HDG	58LW
F	39	GUARDRAIL HEX NUT HDG	58HN563
Q	2	1/2" X 2" STRUT BOLT A325 HDG	2BLT
H	6	1/2" X 1 1/2" PLATE BOLT A325 HDG	125BLT
I	16	FLAT WASHER F436 A325 HDG	12FW436
J	8	LOCK WASHER HDG	12LW
K	8	HEX NUT A563 HDG	12HN563
I	4	3/8" X 3" HEX LAG SCREW GR5 HDG	38LS
M	4	FLAT WASHER F436 A325 HDG	38FW844
N	2	FLAT WASHER F436 A325 HDG	1FW436
O	2	1" HEX NUT A563HDG	1HN563
D	1	18" TO 24" LONG ZIP TIE RATED 175-200LB	ZPT18
Q	1	1 1/2" X 4" SCH-40 PVC PIPE	PSPCR4
R	1	RFID CHIP RATED MIL-STD-810F	RFID810F
S	1	IMPACT HEAD REFLECTIVE SHEETING	RS30M

SPIG INDUSTRY, LLC
SINGLE GUARDRAIL TERMINAL
SGT - TL-3 - MASH
SGT (15) 31-20

FILE: g0153120.dgn	DN: TXDOT	CK: KM	DR: VP	CK: VP
© TXDOT: APRIL 2020	CONF: SECT	JOB	HIGHWAY	
REVISIONS	6429 94	001	US 59, ETC.	
DIST	COUNTY	CITY	SHEET NO.	
LFK	POLK		37	






GENERAL NOTES

1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST" BOLTS (ASTM A307) SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT (ASTM A563) AND 3/4" ROUND WASHER (ASTM F436) AND NOT MORE THAN 1" BEYOND IT. BUTTON HEAD "SPLICE" BOLTS (ASTM A307) ARE 3/4" X 1-1/4" WITH 3/4" NUTS (ASTM A563).
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM REQUIRING CONSTRUCTION OF THE TRANSITION.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. SEE GF (31) STANDARD FOR INSTALLATION GUIDANCE.
9. POSTS SHALL NOT BE SET IN CONCRETE.
10. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TXDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
11. REFER TO STANDARD GF (31) FOR ADDITIONAL DETAILS.
12. RAIL HEIGHT ADJUSTMENT IS ASSESSED AT TL-3 MASH COMPLIANT FOR STEEL POST HEIGHT TRANSITION TO 28" STEEL POST GUARDRAIL.

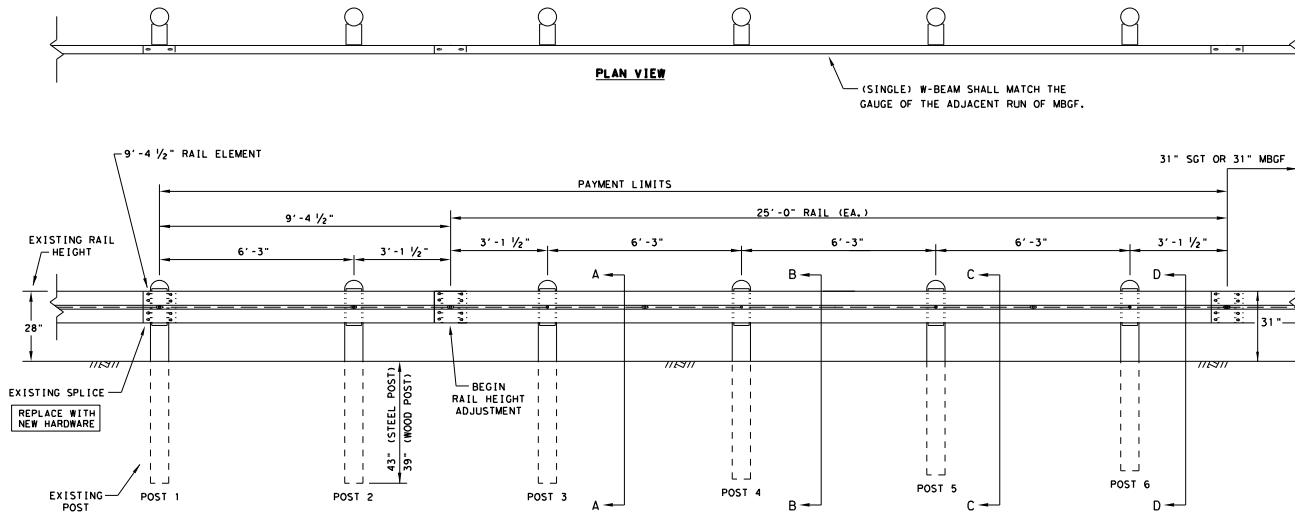


ELEVATION VIEW

* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.



25'-0" (NOM.) W-BEAM RAIL ELEMENT



9'-4 1/2" (NOM.) W-BEAM RAIL ELEMENT

HARDWARE LIST

QTY	DESCRIPTION
1	9'-4 1/2" W-BEAM RAIL ELEMENT 12GA.
1	25'-0" W-BEAM RAIL ELEMENT 12GA. (TYP)
6	7 1/2" DIA X 6'-0" DOMED ROUND WOOD POSTS (TYP)
6	6" X 8" X 68" RECTANGULAR WOOD POSTS (TYP)
6	W6 X 8.5 OR W6 X 9 X 72" STEEL POSTS (TYP)
6	6" X 8" X 14" WOOD BLOCKS OR COMPOSITE (TYP)
6	3/4" X 18" GUARDRAIL BOLTS WITH NUTS (FBB04)
6	3/8" ROUND WASHERS (ASTM F436) (FWC160)
6	3/4" X 10" GUARDRAIL BOLTS WITH NUTS (FBB03)
24	3/8" X 1-1/4" GUARDRAIL SPLICE BOLTS WITH DOUBLE RECESSED NUTS (ASTM A563) (FBB01)


POST AND BLOCK-OUT TYPES AVAILABLE

FOR WOOD POST


FOR STEEL POST

NOTE: HARDWARE SHALL MEET THE FOLLOWING REQUIREMENTS.


- GUARDRAIL POST BOLTS (ASTM A307 GR. A)
- GUARDRAIL ROUND WASHERS (ASTM F436)
- GUARDRAIL DOUBLE RECESSED NUTS (ASTM A563)
- GUARDRAIL SPLICE BOLTS (ASTM A307 GR. A)
- GUARDRAIL SPLICE NUTS (ASTM A563)

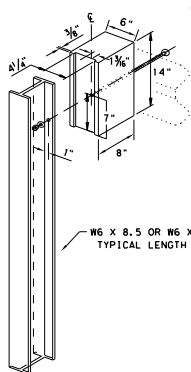

ROUTED WOOD BLOCK-OUT TO STEEL POST

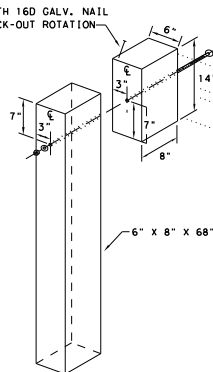

WOOD BLOCK TO RECTANGULAR WOOD POST

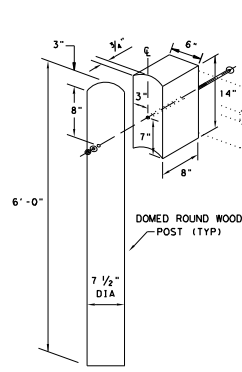


WOOD BLOCK-OUT TO DOMED ROUND WOOD POST

Texas Department of Transportation
 Design Division Standard


**METAL BEAM GUARD FENCE
 RAIL HEIGHT ADJUSTMENT
 (28" TO 31")
 TL-3 MASH COMPLIANT
 RAIL-ADJ(A)-19**

FILE: r010d019	DATE: NOVEMBER 2019	CONT: 6429	SECT: 94	JOB: 001	US 59, ETC.
REVISIONS		DATE: 6429	BY: 94	COUNTY: POLK	SHEET NO. 38

DATE: 1/5/2023
 FILE: T:\LFKDM\mnt Contracts\0-RMC - Routine Maintenance Contracts\123 Plots\6429-94-001 Polk MBGF Report-DDON\STD STANDARDS\NewMBGF & SGT Standard.dwg
 DISCLAIMER: THIS STANDARD IS GOVERNED BY THE TEXAS ENGINEERING PRACTICE ACT. NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONFORMANCE OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

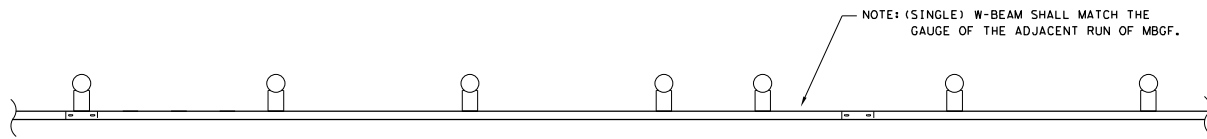


PLAN VIEW

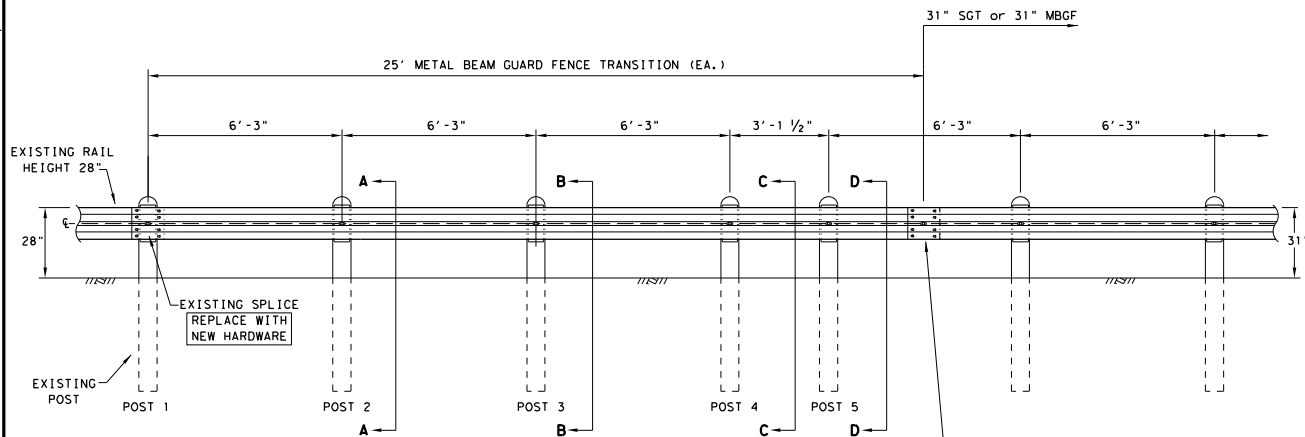

ELEVATION VIEW

* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

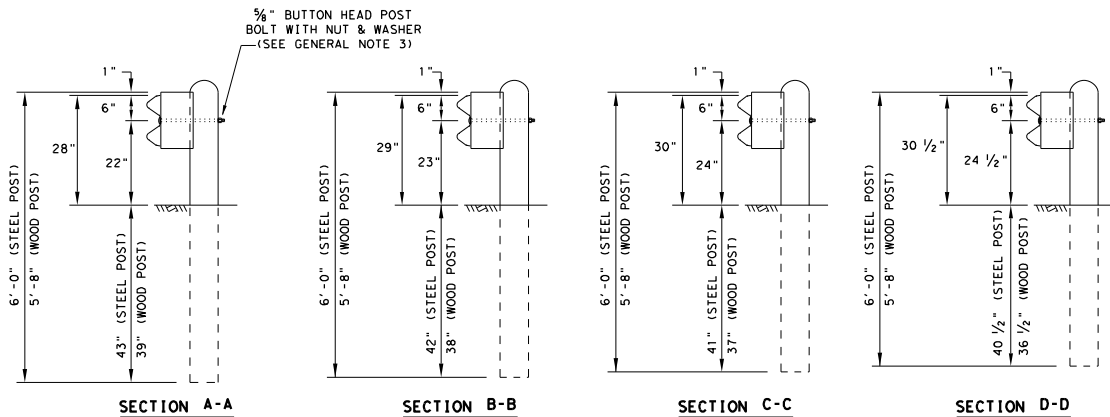

SECTION A-A

SECTION B-B

SECTION C-C

SECTION D-D

NOTE: HARDWARE SHALL MEET THE FOLLOWING REQUIREMENTS.
 GUARDRAIL POST BOLTS (ASTM A307 GR. A)
 GUARDRAIL ROUND WASHERS (ASTM F436)
 GUARDRAIL DOUBLE RECESSED NUTS (ASTM A563)
 GUARDRAIL SPLICE BOLTS (ASTM A307 GR. A)
 GUARDRAIL SPLICE NUTS (ASTM A563)

GENERAL NOTES

1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENT SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0" OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST" BOLTS (ASTM A307) SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT (ASTM A563) AND 5/8" ROUND WASHER (ASTM F436) AND NOT MORE THAN 1" BEYOND IT. BUTTON HEAD "SPLICE" BOLTS (ASTM A307) ARE 5/8" X 1-1/4" WITH 5/8" NUTS (ASTM A563).
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM REQUIRING CONSTRUCTION OF THE TRANSITION.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. SEE GF(31) STANDARD FOR INSTALLATION GUIDANCE.
9. POSTS SHALL NOT BE SET IN CONCRETE.
10. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
11. REFER TO STANDARD GF(31) FOR ADDITIONAL DETAILS.
12. RAIL HEIGHT ADJUSTMENT IS ASSESSED AT TL-3 MASH COMPLIANT FOR STEEL POST HEIGHT TRANSITION TO 28" STEEL POST GUARDRAIL.




HARDWARE LIST

QTY	DESCRIPTION
1	25'-0" W-BEAM RAIL ELEMENT 12GA. (TYP)
5	7 1/2" DIA X 6'-0" DOMED ROUND WOOD POSTS (TYP)
5	6" X 8" X 68" RECTANGULAR WOOD POSTS (TYP)
5	W6 X 8.5 OR W6 X 9 X 72" STEEL POSTS (TYP)
5	6" X 8" X 14" WOOD BLOCKS OR COMPOSITE (TYP)
5	5/8" X 18" GUARDRAIL BOLTS AND NUTS (FBB04)
5	5/8" ROUND WASHERS (ASTM F436) (FWC16G)
5	5/8" X 10" GUARDRAIL BOLTS AND NUTS (FBB03)
16	5/8" X 1-1/4" GUARDRAIL SPLICE BOLTS WITH DOUBLE RECESSED NUTS (ASTM A563) (FBB01)

POST AND BLOCK-OUT TYPES AVAILABLE

FOR WOOD POST
 FOR STEEL POST

		Design Division Standard	
METAL BEAM GUARD FENCE RAIL HEIGHT ADJUSTMENT (28" TO 31") TL-3 MASH COMPLIANT RAIL-ADJ(B)-19			
FILE: r01odj019	DIST: TxDOT	CK: RM	DR: VP
NOVEMBER 2019	CONT: 6429 94	SECT: 001	JOB: US 59, ETC.
REVISIONS	DIST: LFK	COUNTY: POLK	SHEET NO.: 39

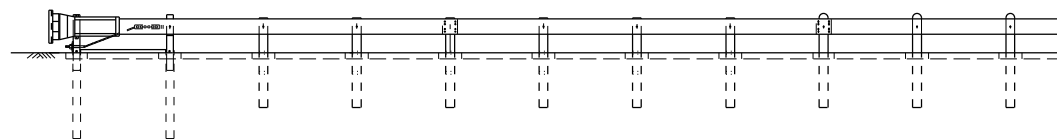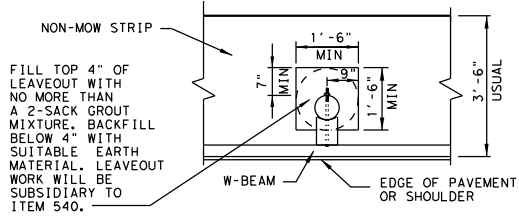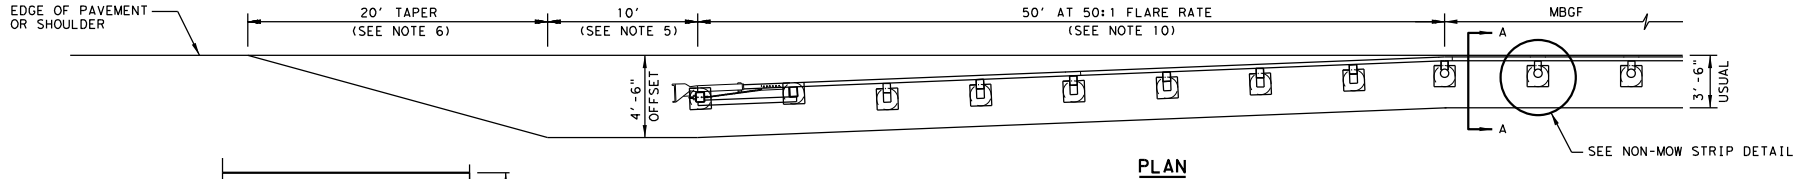


NON-MOW STRIP DETAIL
HOT MIX ASPHALTIC PAVEMENT NON-MOW STRIP WITH 18"x18" OR 18" DIA. MINIMUM LEAVEOUT


ELEVATION

GENERAL NOTES

1. NON-MOW STRIPS SHALL BE HOT MIX ASPHALTIC PAVEMENT UNLESS OTHERWISE SHOWN ON THE PLANS. HOT MIX ASPHALTIC PAVEMENT SHALL MEET THE REQUIREMENTS OF AND BE PLACED IN ACCORDANCE WITH THE PERTINENT BID ITEM AS SHOWN ON THE PLANS. OTHER MATERIALS MAY BE USED AS INDICATED ELSEWHERE IN THE PLANS. MATERIALS FOR THE OPTIONAL WIDENED PAVEMENT SECTION SHALL BE AS SHOWN IN THE ROADWAY TYPICAL SECTIONS.
2. THE TYPE OF APPROVED POST WILL BE SHOWN ELSEWHERE IN THE PLANS. SEE THE APPLICABLE STANDARD SHEETS FOR ADDITIONAL DETAILS AND INFORMATION.
3. THE LIMITS OF PAYMENT FOR HOT MIX ASPHALTIC PAVEMENT WILL INCLUDE LEAVEOUTS FOR POST.
4. THE LEAVEOUTS SHALL BE FILLED WITH NO MORE THAN A 2-SACK GROUT MIXTURE AND PLACED IN ACCORDANCE WITH SECTION 421.2.F, "MORTAR AND GROUT". PAYMENT FOR FURNISHING AND PLACING THE GROUT MIXTURE WILL BE CONSIDERED SUBSIDIARY TO THE VARIOUS BID ITEMS.
5. THE NON-MOW STRIP SHALL BE EXTENDED FULL WIDTH FOR 10' IN ADVANCE OF THE GUARDRAIL END TREATMENT UNLESS OTHERWISE DIRECTED BY THE ENGINEER.
6. A 20' TAPER WILL BE USED IN ADVANCE OF GUARDRAIL UNLESS OTHERWISE SHOWN IN THE PLANS, OR DIRECTED BY THE ENGINEER.
7. THE SLOPE OF THE NON-MOW STRIP SHOULD TYPICALLY CONFORM TO THE ROADWAY SLOPE. THE SLOPE SHOULD NEVER EXCEED 10:1.
8. EXACT LOCATION OF MGBF PLACEMENT WILL BE SHOWN ELSEWHERE IN THE PLANS TO MEET APPROPRIATE CLEAR ROADWAY WIDTH AND CLEAR ZONE REQUIREMENTS.
9. EXCAVATION REQUIRED TO CONSTRUCT NON-MOW STRIP WILL NOT BE MEASURED OR PAID FOR DIRECTLY BUT WILL BE SUBSIDIARY TO PERTINENT ITEMS.
10. THE FLARE RATE MAY BE DECREASED OR ELIMINATED IF DIRECTED BY THE ENGINEER.

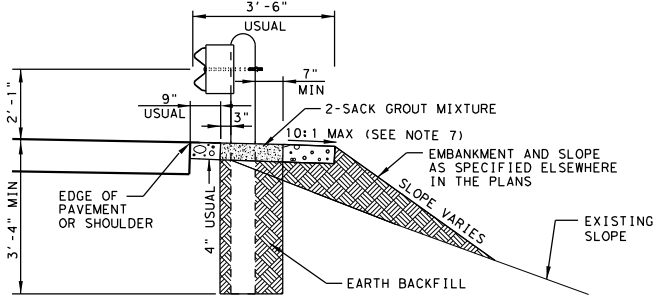

SECTION A-A
ASPHALTIC NON-MOW STRIP

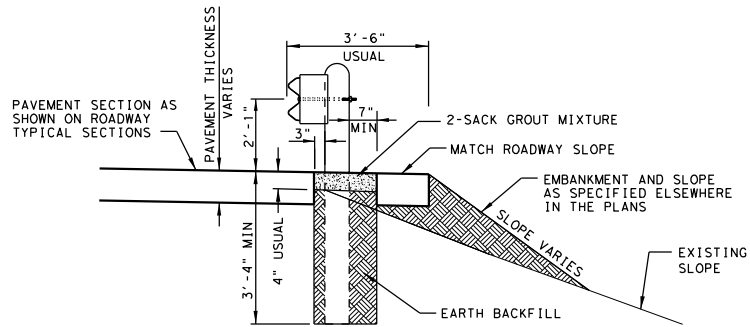

OPTIONAL SECTION A-A
WIDEN PAVEMENT SECTION

DISCLAIMER: THIS DETAIL IS COVERED BY THE TEXAS ENGINEERING PRACTICE ACT. THE USER ASSUMES ALL LIABILITY FOR ANY AND ALL DAMAGES, INCLUDING BUT NOT LIMITED TO, DAMAGES FOR CONVERSION OF THIS DETAIL TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

REVISED: 2-19-09
ADDED EDGE OF PAVEMENT OR SHOULDER LINE TO PLAN VIEW AND DETAIL.
REVISED: 7-16-10
CHANGED DEPTH OF NON-MOW STRIP FROM 5" TO 4".
REVISED: 12-30-11
REVISED HEIGHT OF W-BEAM ABOVE PAVEMENT SURFACE


© 2011 **Texas Department of Transportation**
LUFKIN DISTRICT STANDARD
NON-MOW STRIP DETAILS
NOT TO SCALE

FED. NO. DIV. NO.	PROJECT NO.	SHEET NO.
6	RMC 6429-94-001	40
STATE	DISTRICT	COUNTY
TEXAS	LFK	POLK
CONTROL SECTION	JOB	HIGHWAY NO.
6429 94	001	US 59, ETC.

DATE: 1/5/2023
 FILE: T:\LFKDM\mnt\ Contracts\0-RMC - Routine Maintenance Contracts\123 Plots\6429-94-001 Polk MBGF RMC 6429-94-001 Polk MBGF Repair\DDON\STD STANDARDS\NewMBGF & SGT Standard
 DISCUSS THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT" - NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


NOTE:
 A TRANSITION MAY BE REQUIRED TO INSTALL THE QUADGUARD M10 TO THE OBJECT BEING SHIELDED.

QUADGUARD M10 24" WIDE 6-BAY SYSTEM

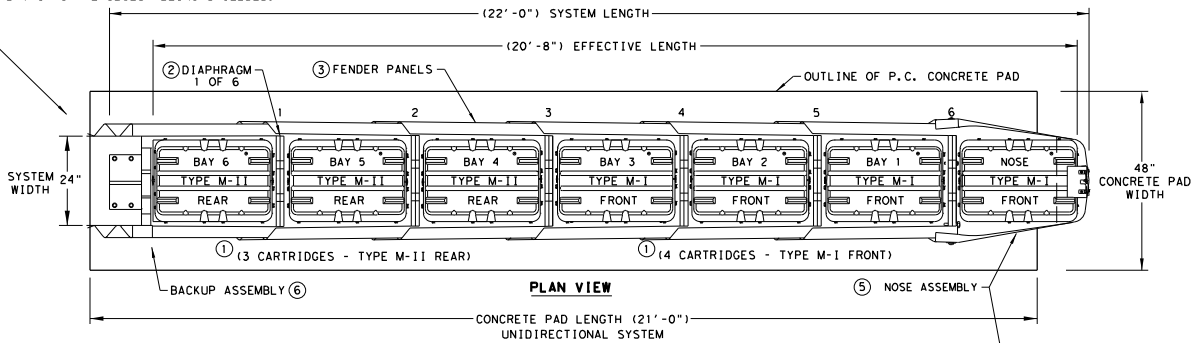

KEY	KEY
① QUADGUARD CARTRIDGE	④ MONORAILS
② DIAPHRAGM	⑤ NOSE ASSEMBLY
③ FENDER PANEL	⑥ BACKUP ASSEMBLY

NOTE:
 PROVISION SHALL BE MADE FOR REAR FENDER SIDE PANELS TO SLIDE REARWARD UPON IMPACT, 30" MIN.

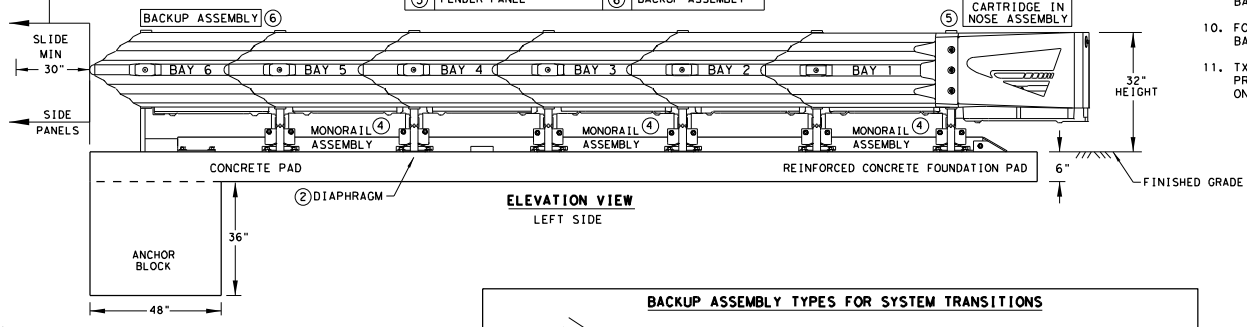

NOTES:
 CONTACT THE MANUFACTURER WITH SITE SPECIFIC DATA (SSD) FOR CONCRETE PAD AND ANCHOR BLOCK INSTALLATION REQUIREMENTS.

A MANUFACTURER'S DRAWING PACKAGE UNIQUE AND SPECIFIC FOR THE QUADGUARD M10 (N) INSTALLATION AND DETAILED INFORMATION REGARDING THE TYPE OF BACKUP ASSEMBLY FOR THE REQUIRED TRANSITION WILL BE PROVIDED TO THE ENGINEER AND INSTALLER.

6" REINFORCED CONCRETE PAD REQUIRES THE INSTALLATION OF AN ANCHOR BLOCK AS SHOWN ON THE MANUFACTURER'S DRAWING PACKAGE.

8" NON-REINFORCED CONCRETE PAD MAY NOT REQUIRE AN ANCHOR BLOCK, IF THE PAD IS INSTALLED AGAINST AN IMMOVABLE CONCRETE BACKUP.

CONCRETE PAD AND ANCHOR BLOCK COMBINATIONS SHALL BE CONFIRMED WITH THE MANUFACTURER BASED UPON SITE SPECIFIC DATA (SSD).

NOTE:
 THE QUADGUARD M10 24" WIDE 6-BAY - NARROW SYSTEM HAS BEEN TESTED TO MASH TEST LEVEL 3.

TL-3 MODEL #	QM10024	CARTRIDGE TYPES IN BAYS			
BAYS	6	TYPE-MII	TYPE-MI	TYPE-MI	
DIAPHRAGMS	6	3	3	1	
WIDTH	24"	REAR	FRONT	NOSE	

TL-2 MODEL #	QM7024	CARTRIDGE TYPES IN BAYS			
BAYS	3	TYPE-MII	TYPE-MI	TYPE-MI	
DIAPHRAGMS	3	1	2	1	
WIDTH	24"	REAR	FRONT	NOSE	

BACKUP ASSEMBLY TYPES FOR SYSTEM TRANSITIONS

SEE GENERAL NOTE 10 FOR CLEARANCE LIMITATIONS

SYSTEM TRANSITIONS TYPES	
1	QUAD-BEAM TO CONCRETE SAFETY BARRIER
2	QUAD-BEAM TO CONCRETE BRIDGE RAIL
3	QUAD-BEAM TO CONCRETE END SHOE
4	QUAD-BEAM TO THREE-BEAM RAIL
5	QUAD-BEAM TO W-BEAM RAIL

NOTE:
 TRANSITION ASSEMBLIES FOR THE QUADGUARD M10 TO THREE-BEAM OR W-BEAM FENCE REQUIRES I-BEAM POSTS:
 ALL POSTS W6x8, 5/9 I-BEAMS (78" LONG).

⑥ TENSION STRUT BACKUP

NOTES:
 CONTACT THE MANUFACTURER WITH SITE SPECIFIC DATA (SSD) FOR THE CORRECT BACKUP ASSEMBLY AND TRANSITION PANELS OR SIDE PANELS USED FOR STANDARD AND BI-DIRECTIONAL INSTALLATIONS: AT DIVIDED-HIGHWAY MEDIANS OR UNDIVIDED ROADWAYS WHERE THE SYSTEM IS EXPOSED TO IMPACTS FROM ONE OR TWO DIFFERENT DIRECTIONS OF TRAFFIC FLOW.

NOTE:
 THIS STANDARD IS A BASIC REPRESENTATION OF THE QUADGUARD M10 SYSTEM AND IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

GENERAL NOTES

- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: TRINITY HIGHWAY - ENERGY ABSORPTION INC. AT 1(888)323-6374.
- SEE THE RECENT QUADGUARD M10 PRODUCT DESCRIPTION ASSEMBLY MANUAL FOR IMPACT PERFORMANCE CHARACTERISTICS AND DESIGN LIMITATIONS AND THE DRAWING PACKAGE FOR THE NARROW 24" SYSTEM BEFORE INSTALLING THE QUADGUARD M10 SYSTEM AT ANY GIVEN LOCATION.
- FOR BI-DIRECTIONAL TRAFFIC: THE PLACEMENT OF THE QUADGUARD M10 IS RESTRICTED. AS BI-DIRECTIONAL TRAFFIC APPROACHES THE REAR OF THE QUADGUARD M10 THE CRASH CUSHION MUST BE PLACED SUCH THAT THE TRAFFIC SIDE OF CRASH CUSHION IS AT LEAST AS FAR FROM ADJACENT TRAVEL LANE LINE AS THE TRAFFIC SIDE OF BARRIER/OBJECT BEING SHIELDED.
- SYSTEM TRANSITION: APPROPRIATE TRANSITION PANELS OR SIDE PANELS WILL BE REQUIRED FOR PROPER IMPACT PERFORMANCE. THE CORRECT PANEL(S) TO USE WILL DEPEND ON THE DIRECTION OF TRAFFIC FLOW AND WHAT TYPE OF BARRIER OR ROAD FEATURE THE QUADGUARD M10 SYSTEM IS SHIELDING. SEE THE QUADGUARD M10 PRODUCT DESCRIPTION & ASSEMBLY MANUAL FOR FURTHER DETAILS.
- COMPONENTS FOR THE QUADGUARD M10 BACKUP AND REINFORCING DETAILS ARE SHOWN ON THE QUADGUARD M10 PRODUCT DESCRIPTION & ASSEMBLY MANUAL.
- CONCRETE PAD SHALL BE 6" MIN. REINFORCED 28MPa (4,000 PSI) (P.C.) OR 8" MIN. NON-REINFORCED 28MPa (4,000 PSI) CONCRETE ROADWAY MEASURING AT LEAST 12'-0" WIDE BY 50'-0" LONG. ANCHOR BLOCK IS NOT REQUIRED WHEN USING 8" CONCRETE PAD INSTALLED AGAINST AN IMMOVABLE STRUCTURE, E.G. CONCRETE WALL.
- IF THE CROSS-SLOPE VARIES MORE THAN 2% OVER THE LENGTH OF THE SYSTEM, THE CONCRETE PAD WILL REQUIRE LEVELING. MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%.
- THE INSTALLATION AREA SHOULD BE FREE OF CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE QUADGUARD M10 SYSTEM SHOULD BE INSTALLED APPROXIMATELY PARALLEL WITH THE BARRIER.
- FOR THE TENSION STRUT BACKUP THE DISTANCE BETWEEN THE BACK OF BACKUP AND THE BARRIER WALL SHOULD NOT EXCEED 7" IN ANY CASE.
- TxDOT HAS ONLY APPROVED THE 24" WIDE QUADGUARD M10 SYSTEM. THE QUADGUARD M10 PRODUCT DESCRIPTION AND ASSEMBLY MANUAL INCLUDES SYSTEM WIDTH OF 24". ONLY THE 24" SYSTEM IS ALLOWED TO BE INSTALLED ON TEXAS ROADWAYS.

FOUNDATION & ANCHORING REQUIREMENTS
FOUNDATION TYPES: A, B, C, & D

FOUNDATION TYPE:A	REINFORCED CONCRETE PAD OR ROADWAY FOUNDATION: 6" MINIMUM DEPTH (P.C.C.) ANCHORAGE: 7" STUDS EMBEDDED 5 1/2" - APPROVED ADHESIVE
FOUNDATION TYPE:B	ASPHALT OVER P.C.C. FOUNDATION: 3" MIN. (A.C.) OVER 3" MIN. (P.C.C.) ANCHORAGE: 18" THREADED ROD EMBEDDED 16 1/2" - APPROVED ADHESIVE
FOUNDATION TYPE:C	ASPHALT OVER SUBBASE FOUNDATION: 6" MIN. (A.C.) OVER 6" MIN. (C.S.) ANCHORAGE: 18" THREADED ROD EMBEDDED 16 1/2" - APPROVED ADHESIVE
FOUNDATION TYPE:D	ASPHALT ONLY FOUNDATION: 8" MIN. (A.C.) ANCHORAGE: 18" THREADED ROD EMBEDDED 16 1/2" - APPROVED ADHESIVE

KEY:
 ASPHALT CONCRETE (A.C.)
 COMPACTED SUBBASE (C.S.)
 PORTLAND CEMENT CONCRETE (P.C.C.)
 NOTE: SEE TRINITY'S PRODUCT DESCRIPTION ASSEMBLY MANUAL FOR THE APPROVED ADHESIVE.
 IF THE UNIT IS ANCHORED TO ASPHALTIC CONCRETE, IT SHOULD BE RELOCATED TO FRESH, UNDISTURBED ASPHALT AND RE-ANCHORED AFTER EACH IMPACT TO ENSURE ADEQUATE FUTURE PERFORMANCE.

TENSION STRUT BACKUP MAY BE USED IN CONSTRUCTION ZONES ON ASPHALT CONCRETE (A.C.) FOR TEMPORARY USE ONLY.


REUSABLE

Texas Department of Transportation Design Division Standard

TRINITY HIGHWAY ENERGY ABSORPTION QUADGUARD M10 (MASH TL-3 & TL-2 NARROW-24" ONLY) QUARD (M10) (N) -20

FILE: aquram10n20.dgn	DN:TxDOT	CK:KRM	DR:JVP	CK:JAG
© TxDOT: NOVEMBER 2020	CONT SECT	JOB	HIGHWAY	
REVISIONS	6429 94	001	US 59, ETC.	
DIST	COUNTY	SHEET NO.		
LFK	POLK	41		

DATE: 1/5/2023
 FILE: T:\LFDK\W\Int\ Contracts\0-RMC - Routine Maintenance Contracts\1923 P.lans.6429-94-001 Polk.MBF Repair\UDON\STD\STANDARDS\New\MBGF & SGT Standard.dwg
 DISCLAIMER: THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

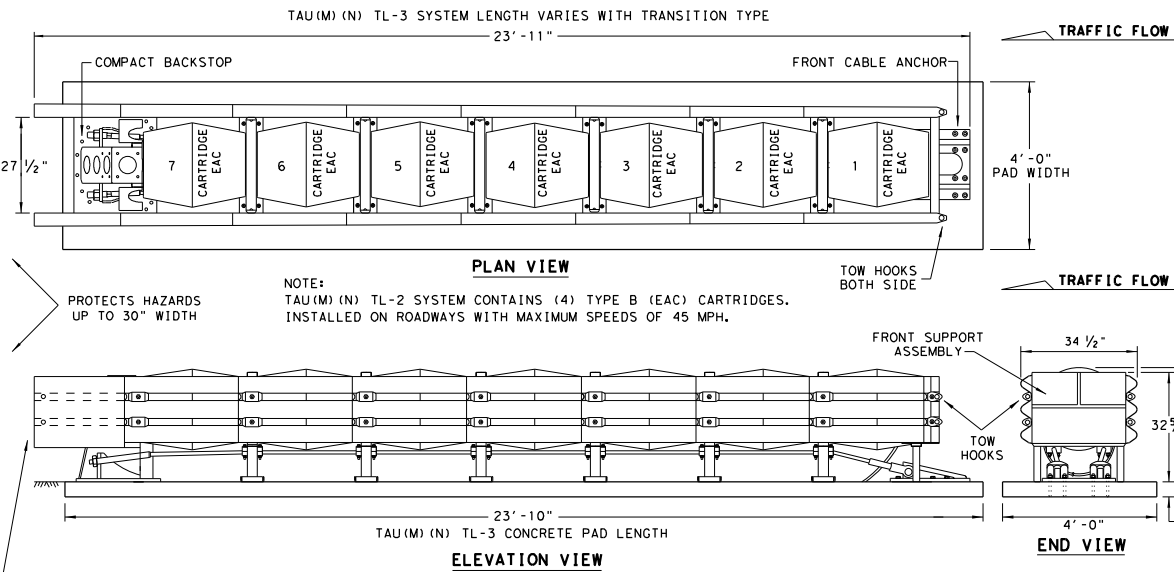

GENERAL NOTES

- FOR SPECIFIC INFORMATION REGARDING THE INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800. 180 RIVER ROAD, RIO VISTA, CA 94571
- REFER TO THE LATEST (LTS) INSTALLATION INSTRUCTION MANUAL FOR IMPORTANT SAFETY MESSAGES, COMPLETE SYSTEM ASSEMBLY, AND ANCHOR INSTALLATION REQUIREMENTS FOR THE NINE (9) DIFFERENT SITE TRANSITIONS.
- INSTALLATION DETAILS FOR THE COMPACT BACKSTOP, FRONT CABLE ANCHOR AND FOUNDATION OPTIONS ARE SHOWN ON THE INSTALLATION INSTRUCTION MANUAL FURNISHED TO THE ENGINEER.
- CONCRETE SHALL BE CLASS "S" WITH A MINIMUM COMPRESSIVE STRENGTH OF 4,000 P.S.I.
- IF THE CROSS-SLOPES VARIES MORE THAN 2% OVER THE LENGTH OF THE SYSTEM, THE CONCRETE PAD WILL REQUIRE LEVELING. MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%
- THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE TAU(M) (N) SYSTEM SHOULD BE APPROXIMATELY PARALLEL WITH THE BARRIER OR CENTER LINE OF MERGING BARRIERS.
- THIS DRAWING REPRESENTS THE UNIVERSAL TAU(M) (N) TL-3 SYSTEM, A RE-DIRECTIVE NON-GATING CRASH CUSHION THAT CAN PROTECT HAZARDS UP TO 30-INCHES IN WIDTH. ALSO AVAILABLE IN TL-2 CONFIGURATION.

PLAN VIEW

NOTE:
 TAU(M) (N) TL-2 SYSTEM CONTAINS (4) TYPE B (EAC) CARTRIDGES, INSTALLED ON ROADWAYS WITH MAXIMUM SPEEDS OF 45 MPH.

PROTECTS HAZARDS UP TO 30" WIDTH

TOW HOOKS BOTH SIDE

NOTES:
 TRANSITIONS AND ATTACHMENTS TO VARIOUS BARRIER SHAPES, RAILINGS AND BI-DIRECTIONAL TRAFFIC FLOWS ARE AVAILABLE. SEE MANUFACTURER'S INSTALLATION INSTRUCTIONS MANUAL FOR ADDITIONAL TRANSITION DETAILS.

NOTE:
 CONCRETE FOUNDATION PAD LENGTH VARIES WITH TL-3 AND TL-2 SYSTEMS, SEE SYSTEM & FOUNDATION LENGTH TABLE.

NOTE:
 PAD THICKNESS VARIES - SEE FOUNDATION OPTIONS


FOUNDATION OPTIONS	
6" REINFORCED CONCRETE	
8" UNREINFORCED CONCRETE	
ASPHALT OVER CONCRETE WITH MINIMUM 6" EMBEDMENT IN CONCRETE	
6" ASPHALT OVER 6" COMPACT SUBBASE	
8" MINIMUM ASPHALT	

SYSTEM & FOUNDATION LENGTH TABLE	
SYSTEM LENGTH	FOUNDATION LENGTH
TL-2 = 15'-5"	TL-2 = 15'-4"
TL-3 = 23'-11"	TL-3 = 23'-10"

* NOTE:
 REQUIRES AN ASPHALT ANCHORAGE PACKAGE: INCLUDES ADDITIONAL BRACES FOR THE FRONT CABLE ANCHOR AND THE COMPACT BACKSTOP, AND ASPHALT HARDWARE KIT. THE TL-3 ASPHALT CONFIGURATION ALSO REQUIRES NESTED SLIDER PANELS AND SHIMS AT THE LAST TWO BAYS. SEE MANUFACTURER'S INSTALLATION INSTRUCTION MANUAL FOR DETAILS.

** NOTE:
 ENGINEER OR CONTRACTOR SHALL COORDINATE WITH THE MANUFACTURER FOR THE CORRECT DECAL PER TRAFFIC FLOW, LEFT, RIGHT OR BOTH-SIDES.

NOTE:
 SEE MANUFACTURER'S INSTALLATION INSTRUCTION MANUAL FOR FOUNDATION SPECIFICATIONS THAT INCLUDE, STONE AGGREGATE MIX, COMPRESSION STRENGTH, STEEL SIZE, ANCHOR SIZE, AND EMBEDMENT DEPTH.



NOTE:
 APPLY A HIGH REFLECTIVE DECAL TO THE DELINEATION BRACKET. DELINEATION DECAL ORIENTATION IS SHOWN ON THE CONSTRUCTION PLAN SET AND SHALL BE IN ACCORDANCE WITH THE TEXAS MUTCD FOR (TRAFFIC CONTROL DEVICES). DECALS ARE AVAILABLE FOR TRAFFIC FLOW ON THE LEFT-SIDE, BOTH -SIDES AND RIGHT-SIDE.

TRANSITION OPTIONS	
USE THE COMPACT BACKSTOP	VERTICAL WALL
	CONCRETE TRAFFIC BARRIERS
	W-BEAM GUARDRAIL
	THRIE BEAM GUARDRAIL

NOTE:
 FOR BI-DIRECTIONAL TRANSITION PANELS AND BRIDGE RAIL END SHOE DETAILS. SEE MANUFACTURER'S INSTALLATION INSTRUCTIONS MANUAL.

BILL OF MATERIALS FOR TAU(M) (N) TL-3 & TL-2 SYSTEMS		QUANTITIES	
PART NUMBER	PART DESCRIPTION	TL-3 SYSTEM	TL-2 SYSTEM
BSI-1708019-00	SLIDING PANEL GALVANIZED TAU(M) (N)	14	8
BSI-1708030-00	END PANEL, THRIE BEAM, GALV, TAU(M) (N)	2	2
BSI-1706001-00	CABLE ASSEMBLY, 7 BAY, TAU(M) (N)	2	-
BSI-1805036-00	CABLE ASSEMBLY, 4 BAY, TAU(M) (N)	-	2
BSI-1708018-00	FRONT CABLE ANCHOR	1	1
BSI-1707034-00	COMPACT BACKSTOP	1	1
B030703	MIDDLE SUPPORT ASSEMBLY	6	3
B030704	FRONT SUPPORT	1	1
B010722	ENERGY ABSORBING CARTRIDGE, TYPE B	7	4
K001005	TAU-II FRONT SUPPORT LEG KIT	1	1
BSI-1709083-KT	TETHER KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1809041-KT	SLIDER KIT (INCLUDES ALL HARDWARE)	7	4
BSI-1808033-KT	CABLE GUIDE KIT (INCLUDES ALL HARDWARE)	6	3
BSI-1809040-KT	TOW HOOK KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1808034-KT	DELINEATION BRACKET KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1808035-KT	END PANEL MOUNT KIT (INCLUDES ALL HARDWARE)	1	1
BSI-1808036-KT	CONCRETE ANCHORING KIT	1	1
** SEE NOTE	HIGH REFLECTIVE DECAL	1	1
ECN 3883	INSTALLATION AND INSTRUCTIONS MANUAL	1	1

NOTES:
 UPGRADE KITS ARE AVAILABLE TO RETROFIT EXISTING NCHRP 350 TAU-II SYSTEMS TO MASH COMPLIANT SYSTEMS. SEE MANUFACTURER'S PRODUCT INFORMATION.

THE TAU(M) (N) UNIDIRECTIONAL SYSTEM IS FREE STANDING AND IS NOT REQUIRED TO BE CONNECTED TO THE HAZARD.

TRANSITIONS TO GUARD FENCE, BRIDGE RAILS AND ROADSIDE BARRIERS SHALL BE IN ACCORDANCE WITH TxDOT'S POLICY.

NOTE:
 THIS STANDARD IS A BASIC REPRESENTATION OF THE UNIVERSAL TAU(M) (N) SYSTEM, IT IS NOT INTENDED TO REPLACE THE INSTALLATION INSTRUCTION MANUAL.

Design Division Standard

LINDSAY TRANSPORTATION SOLUTIONS











UNIVERSAL CRASH CUSHION (MASH TL-3 & TL-2)

TAU(M) (N) - 19

FILE: t0um19.dgn	DN: TxDOT	CR: KM	DN: VP	CR:
© TxDOT: APRIL 2019	CONT SECT	JOB	HIGHWAY	
REVISIONS	6429 94	001	US 59, ETC.	
DIST	LFK	COUNTY	POLK	SHEET NO.
				42

REUSABLE

1/17/2023 3:05:00 PM T:\LEAD\Road\Main\Contracts\Q\PMC - Routine Maintenance, Contracts\FY23, Plans\6429-94-001, Polk, MBEF, Repairs\DDN\STD\Informat\Local\Sheets\VIEW TRAFFIC RAIL INFO

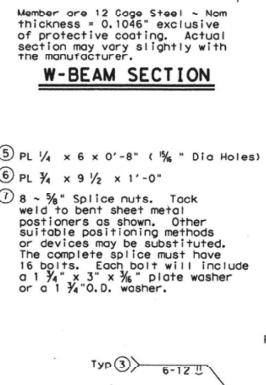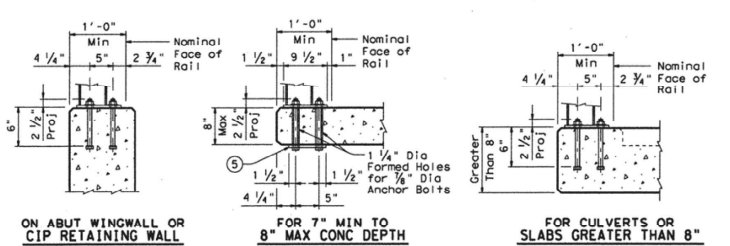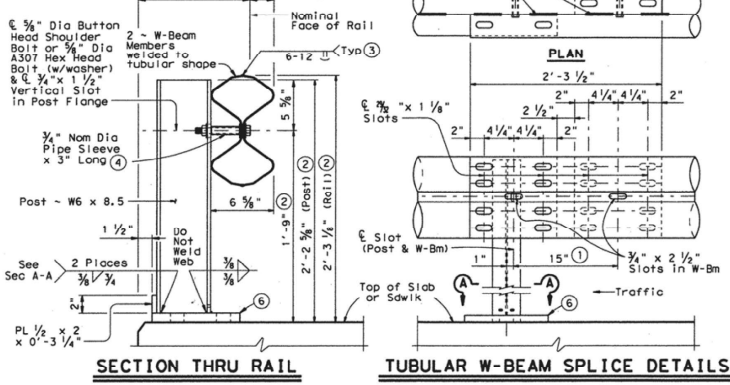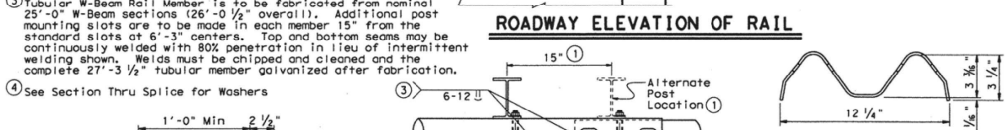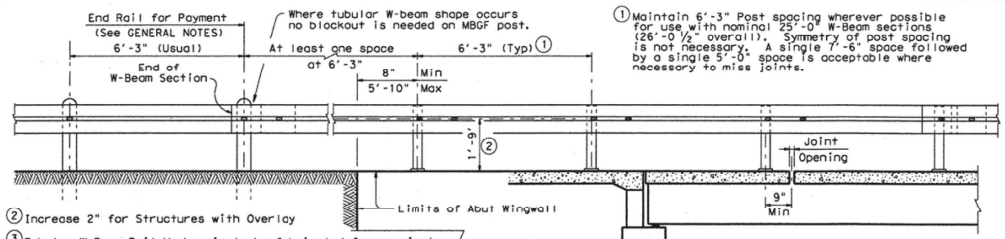

CONSTRUCTION NOTES:
 Tubular Rail Member must be extended and connected to at least the first soil embedded post at each end of the structure. More such posts must be used to utilize 25' standard sections. Approach guard fence posts must be spaced 6'-3\"/>

MATERIAL NOTES:
 All steel components except reinforcing must be galvanized unless otherwise shown in plans.
 Anchor bolts must be 3/4\"/>

GENERAL NOTES:
 This rail was evaluated based on the results of previous crash tests and approved for a NCHRP Report 350 TL-2 rating. The T6 rail is only approved for low speed use, design speeds of 45 mph and less.
 This railing cannot be used on bridges with expansion joints providing more than 4\"/>

DESIGN/REPAIR CRITERIA
 The posts of this rail are designed to break away on impact from an errant vehicle. The rail is designed to deflect approx. two to three feet as it contains and redirects the errant vehicle. This rail may not be installed on top of or behind curbs that project above finished grade.
 Fully anchored guardfence must be attached to each end of rail.
 Repairs to impact-damaged post/baseplate units are not permitted. All impact-damaged posts must be replaced with a new post/baseplate unit.
 This railing is especially suitable for use on bridge width box culverts. The detail sheet titled "Box Culvert Mounting Details For Type T6 Rail, T6-CM" is then required, showing culvert curbs and wingwall modifications and additional reinforcing steel to be included as part of the railing for payment.

The use of this railing is restricted to design speeds of 45 mph or less and to horizontal curves with radius greater than 1000 feet.

Texas Department of Transportation
 Bridge Division

TRAFFIC RAIL

TYPE T6

FILE: r16t001.dgn	DR: TXDOT	CR: TXDOT	SR: JTR	CHK: TXDOT
TXDOT April 2009	DESIGNER: FEDERAL AID PROJECT	SHEET		
REVISIONS	LF: RMC 6233-29-001	33		
	COUNTY: POLK	CONTROL SECT: 6233	JOB: 29 US 59	

"AS BUILT"
 TYPE T6

FOR INFORMATIONAL PURPOSES ONLY

TEXAS DEPARTMENT OF TRANSPORTATION			
©2023			
PROJECT NO.	SHEET NO.		
6 RMC 6429-94-001	44		
STATE	DIST.	COUNTY	
TEXAS	LFK	POLK	
CONT.	SECT.	JOB	HIGHWAY NO.
6429	94	001	US 59, ETC.

DISCLOSURE: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units.

DATE: 2/14/2023 12:44:38 PM
 FILE: T:\LKFD\MAint Contracts\0-RMC - Routine Maintenance Contracts\1223 of DSHS\epic\dgn\epic.dgn

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

1. N/A

No Action Required Required Action

Action No.

1. The proposed work of this project is to repair and upgrade metal beam guard fence and crash attenuator at various locations through out the Polk County Maintenance Section. This activity maintains the original line and grade, hydraulic capacity and original purpose of the site. Therefore, this project meets the definition of a routine maintenance activity as defined in the TPDES General Permit No. TXR150000 issued March 5, 2018 and TCEQ's TPDES CGP does not apply.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to 1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP#

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

1. N/A

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

No Action Required Required Action

Action No.

1. Contractor to repair or replace in kind, at their own expense, any historic materials damaged (buildings, historical markers, etc.) in the course of executing the work. Contractor is responsible for locating replacement source for historic materials damaged in the course of the work. TxDOT-Environmental Affairs Division is to be informed of proposed repairs to facilitate consultation with Texas Historical Commission prior to execution of repairs.

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

No Action Required Required Action

Action No.

1. N/A

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately.

No Action Required Required Action

Action No.

1. In order to maintain compliance with Chapter 64 of the Texas Parks and Wildlife Code and Migratory Bird Treaty Act (MBTA), construction activities that may affect nests (i.e. tree removal, tree limbing, bridge work) shall be conducted outside of the nesting season (March 15 - September 15). In the event birds or active nests (eggs and/or nestlings present) are encountered, contact the engineer prior to conducting work.

2. Texas Trailing Phlox, a federally listed endangered species, is present within the ROW along FM 1276 from 5 miles South of US 190 to 7 miles South of US 190. No work is to occur within this area without prior approval from the Area Engineer.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPOC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SWP3: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TQDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPND: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- Dead or distressed vegetation (not identified as normal)
- Trash piles, drums, canister, barrels, etc.
- Undesirable smells or odors
- Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

No Action Required Required Action

VII. OTHER ENVIRONMENTAL ISSUES

Portions of FM 1276, FM 943, and FM 2610 are adjacent to Big Thicket National Preserve (B|TH). Below are the following roadway limits adjacent B|TH and actions required:

FM 2610: From 0.25 mi. North of Menard Creek to 0.14 mi. South of Menard Creek.

FM 1276: From the intersection of FM 943 to 0.73 mi. North of intersection of FM 943.

FM 943: From 0.37 mi. West of Menard Creek to 0.30 mi. East of Menard Creek; From 0.36 mi. East of Segno Fire Lane Rd. to 0.54 mi. East of Segno Fire Lane Rd; From 1.18 mi. Northwest of FM 1276 intersection to 0.23 mi. Southeast of FM 1276 intersection; From Hardin County Line to 2.32 mi. North of Hardin County Line; From 0.31 mi. Southeast of Wiggins Loop Rd. to 2.01 mi. Southeast of Wiggins Loop Rd.

No Action Required Required Action

Action No.

1. No trees within the limits described above along FM 1276, FM 943, and FM 2610 are to be cut or otherwise damaged without prior approval from the Area Engineer.

		<i>Design Division Standard</i>	
EPIC			
(ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS)			
SHEET 1 OF 1			
FILE: epic.dgn	DN: TxDOT	CR: RG	DN: VP
REVISITONS	CONT	SECT	JOB
12-12-2011 005	6429	94	001
09-07-14 ADDD NOTE SECTION IV.	DIST	COUNTY	US 59, ETC.
01-22-2015 SECTION I (OWNER ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	LFK	POLK	45