INDEX	OF	SHEETS					
SHEET NO.		DESCRIPTION					
SHEET NO.	T NO. DESCRIPTION						
	GENERAL						

1 2

3

TITLE SHEET


GENERAL NOTES

QUANTITY SHEET

STATE OF TEXAS TEXAS DEPARTMENT OF TRANSPORTATION

WORK CONSISTING OF DENSE-GRADED HOT-MIX ASPHALT DELIVERY (SMALL QUANTITY) (MATERIALS ONLY)

PROJECT NO: MMC 6381-68-001 COUNTY: MATAGORDA CO.

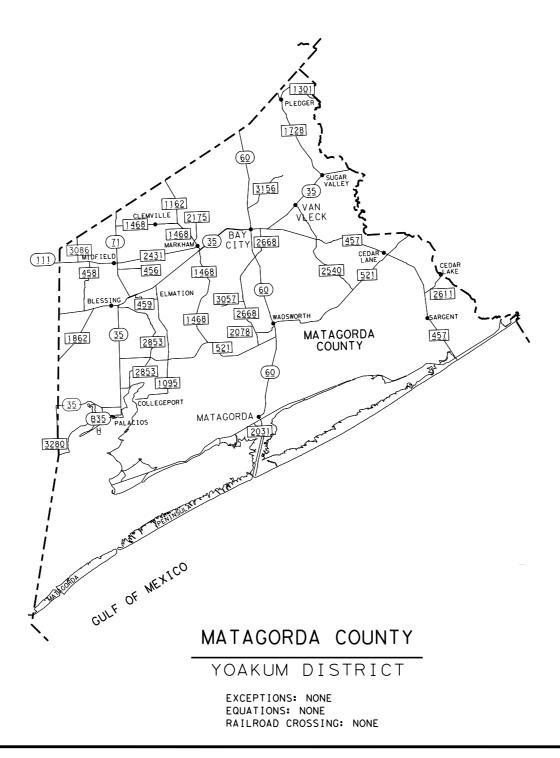

MARK C. NETARDUS 87008

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

Mal & Netanda P.E.

MAINTENANCE ENGINEER

2-8-22 DATE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT:

		FED.RD. D1V.NO.		PROJECT	NO.		SHEET NO.	
			M	IMC 6381	-6	8-001	1	
		STATE		STATE DIST.		COUNTY		
N		TEXA	S	YKM	M	TAGORDA	CO.	
		CONT.	SEC1	r. JOB		HIGHWAY N	10.	
	-							





APPROVED FOR LETTING:

2/8/2022

mil & Wall & P.E.

DIRECTOR OF OPERATIONS

Texas Department © 2021 by Texas Department of Transportation; all rights reserved.

Project Number: MMC 6381-68-001

County: MATAGORDA COUNTY

GENERAL NOTES:

This is a contract for supplying material on an as needed basis.

Bid price should include furnishing material and delivery within the county or to designated location(s) specified.

Contractor questions on this project are to be addressed to the following individual(s):

Mark Netardus	Mark.Netardus@txdot.gov
Mike Walsh	Mike.Walsh@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address: https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

The Maintenance Supervisor for Matagorda County is Michael Jasek @ 979-244-6943.

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered.

The contractor is responsible for furnishing and delivering the dense-graded hot-mix asphalt to the Matagorda Maintenance Yard. The delivery hours will be Monday through Thursday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

Project Number: MMC 6381-68-001

County: MATAGORDA COUNTY

ITEM 4: SCOPE OF WORK

If agreed upon in writing by both parties to the contract, the contract may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract plus any approved terms and conditions made by previously approved change orders.

ITEM 8011: DENSE-GRADED HOT-MIX ASPHALT (SMALL QUANTITY) (MATERIALS ONLY)

Mixture designs, without additives, failing to meet the requirements of Table 6 will require the addition of a minimum 1.0% of Type A hydrated lime based on dry weight of the total aggregate.

Use of RAS in the HMACP surface course is not permitted.

Do not add additional quantity of RAP to stockpiles tested and approved. If additional RAP is added to a stockpile, a new design and trial batch will be required prior to placement on the roadway.

The extracted aggregate from contractor-owned RAP shall have a minimum of 85% two crushed faces when tested in accordance with TEX-460-A, Part I.

Deliver Hot Mix to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.

There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.

SHEET 2



Estimate & Quantity Sheet

COUNTY Matagorda

CONTROLLING PROJECT ID 6381-68-001

DISTRICT Yoakum HIGHWAY SH0035

	CONTROL SECTIO	ON JOB	6381-68-001			
PROJECT ID			A00176976 Matagorda		TOTAL EST.	TOTAL FINAL
COUNTY						
	HIG	HWAY	SH0035			
BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
8011-6042	D-GR HMA (SQ)(TY-D PG 64-22 SAC-B)(DEL)	TON	4,000.000		4,000.000	
		PROJ CO BID CODE DESCRIPTION	COUNTY HIGHWAY BID CODE DESCRIPTION UNIT	PROJECT ID A0017 COUNTY Matage HIGHWAY SHOO BID CODE DESCRIPTION UNIT	PROJECT ID A00176976 COUNTY Matagorda HIGHWAY SH0035 BID CODE DESCRIPTION UNIT EST. FINAL	PROJECT ID A00176976 COUNTY Matagorda HIGHWAY SH0035 BID CODE DESCRIPTION UNIT



DISTRICT	COUNTY	CCSJ	SHEET	
Yoakum	Matagorda	6381-68-001	3	