

INDEX OF SHEETS

STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION

FHWA TEXAS DIVISION	PROJECT NO. MMC 6415-70-001		SHEET NO. 1
STATE TEXAS	DISTRICT LFK	COUNTY SABINE	
CONTROL 6415	SECTION 70	JOB 001	HIGHWAY NO. FM 83, ETC.

SHEET NO. DESCRIPTION GENERAL

- 1 TITLE SHEET
- 2 SITE MAP
- 3, 3A-3B GENERAL NOTES
- 4 ESTIMATE & QUANTITY SHEET
- 5 QUANTITY SUMMARIES

PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT
TYPE OF WORK:

EMULSIFIED ASPHALT (CRS-2P): MATERIALS ONLY
MMC 6415-70-001
FM 83, ETC.

SABINE COUNTY MAINTENANCE SECTION
(SITE AND YARD DELIVERIES)

SEE SHEET #2 FOR SITE MAP

©2022




DocuSigned by:
Jeremy King, P.E.
DISTRICT MAINTENANCE ENGINEER
5135292FE4184A4...
APPROVED FOR LETTING:


7/28/2022
DATE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

DocuSigned by:
[Signature]
DIRECTOR OF OPERATIONS
DA6ECD29BC5C492...

7/28/2022
DATE

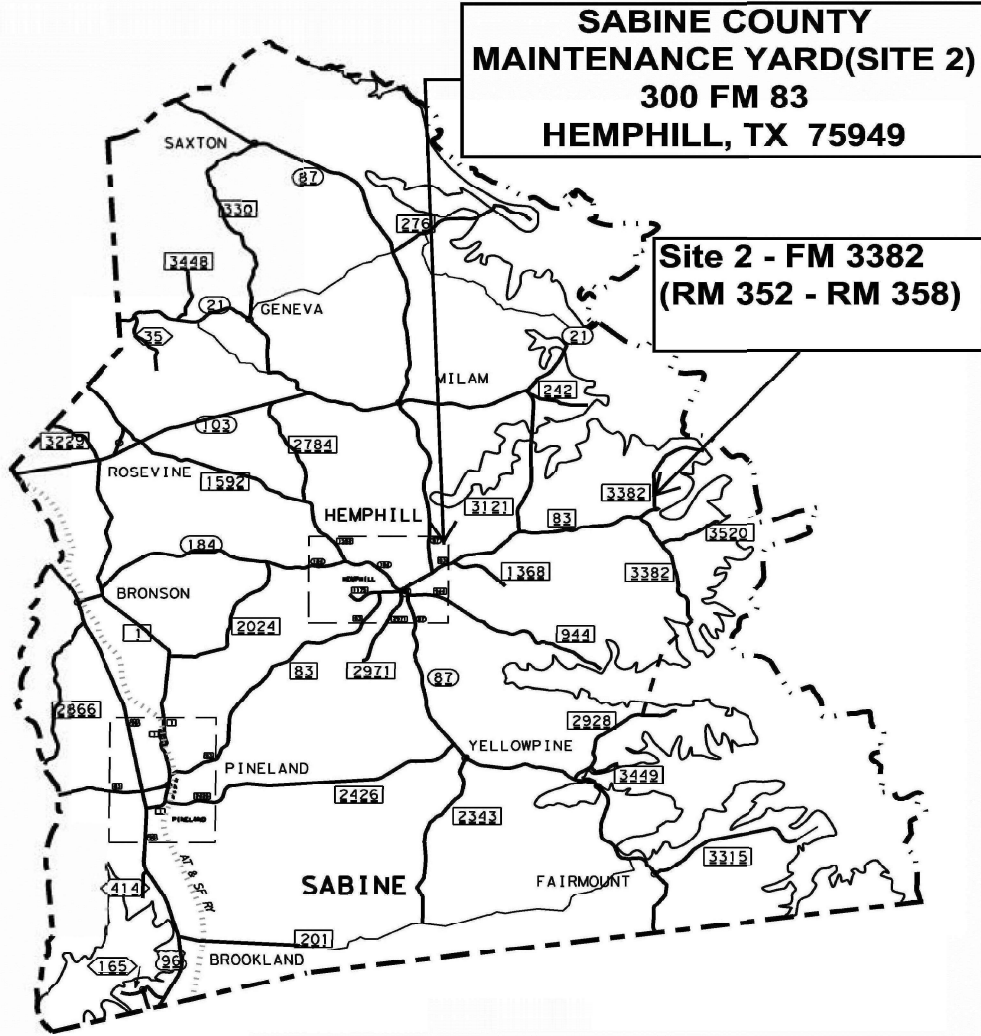

SITE MAP			
©2022			
			
CONT	SECT	JOB	HIGHWAY
6415	70	001	FM 83, ETC.
DIST	COUNTY		SHEET NO.
LFK	SABINE		2

Project Number: MMC 6415-70-001**Control: 6415-70-001****County: Sabine****Highway: FM 83, ETC.****GENERAL NOTES:**

PROJECT DESCRIPTION: Deliver Polymer Modified Cationic Emulsified Asphalt CRS-2P (material only) to the Sabine County Maintenance Yard for use on various state-maintained roadways within the Sabine County Maintenance Section.

Jeremy King Jeremy.King@txdot.gov
 Jenna Lenderman Jenna.Lenderman@txdot.gov

Contractor questions will only be accepted through email to the above individual(s). All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

TXDOT PROJECT SUPERVISORS: All work on this contract will be scheduled and directed by the Maintenance Section Supervisor listed below. Payment will be made monthly for work completed and accepted according to specifications. All payment requests should be directed to the following Maintenance Section Supervisor listed below.

<u>COUNTY</u>	<u>SUPERVISOR</u>	<u>ADDRESS</u>	<u>CONTACT #</u>
Sabine	Kenneth Courville	300 FM 83 Hemphill, TX 75949	(409) 787-1751

CONTRACT PROSECUTION: Each contract awarded by the Department stands on its own and, as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

ITEM 2: INSTRUCTIONS TO BIDDERS

View plans on-line or download from the web at:
<https://www.txdot.gov/business/letting-bids/plans-online.html>

Project Number: MMC 6415-70-001**Control: 6415-70-001****County: Sabine****Highway: FM 83, ETC.**

Order plans from any of the plan reproduction companies shown on the web at:

http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm

Bid items on this contract are listed to establish a unit price for each item. Certain items listed in the proposal may not be used if it is determined by the Engineer that the work will not be required. Actual work performed as directed will be paid utilizing these prices with no further compensation made regardless of the final quantities.

ITEM 4: SCOPE OF WORK

The contract may be extended twice if in the judgment of the Engineer, the contractor has satisfactorily fulfilled the terms and conditions of the contract. The extension must be agreed upon in writing by both parties to the contract and may be extended for an additional period of time not to exceed the original contract time period. The extended contract may be for additional quantities up to the original bid quantities plus any quantities added by an approved change order. The extensions shall meet the terms and conditions of the original contract or any mutually agreed modifications to the said terms and conditions by one or more cumulative change orders. The Engineer will set a deadline for completing the agreements. This deadline will be based in the time needed to re-let and award a new contract if no extension is agreed upon.

ITEM 8: PROSECUTION AND PROGRESS

Contract Time - The number of calendar days for this project shall be 120 days or until contract funds are expended.

Time charges will be in accordance with Article 8.3.1.5 "Calendar Day".

Per Special Provision 000-658, Schedule of Liquidated Damages, charges could occur if requested materials are not ready within five (5) business days after order is placed. In the event, that materials are not delivered within this time frame, Liquidated Damages in the amount described in SP 000-658 will be charged per working day until the delivery is completed, unless otherwise approved by the Engineer. Notify the Sabine County Maintenance Supervisor when encountering any unforeseen delays.

ITEM 500: MOBILIZATION

Mobilization does not apply to this materials contract.

ITEM 8010: ASPHALTS, OILS AND EMULSIONS (MATERIALS ONLY)

Delivery cost for each delivery will be calculated and included in the per gallon cost.

A transport truck shall be equipped with a transfer pump and required hoses to transfer material from the transport to the TxDOT storage tanks at the Sabine County Maintenance Yard. Hose

Project Number: MMC 6415-70-001

Control: 6415-70-001

County: Sabine

Highway: FM 83, ETC.

shall be compatible with a 3-inch cam lock type connection. Failure to provide the required pump and hoses may result in rejection of the transported load at no cost to TxDOT. No payment will be made for this rejected load or any associated return freight.

Unless otherwise specified, all delivery quantities ordered will be for the maximum quantity able to be received for storage. Any quantities above the ordered quantities will be returned, without charge to TxDOT.

This contract is for small quantities only. The contractor will be given a five (5) business day order notice. The contractor shall be able to provide agreed upon amounts as needed.

Contact the Sabine County Maintenance Supervisor at least 1 hour prior to delivery.

The Contractor's driver shall report to the Sabine County Maintenance Supervisor or their representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time of delivery and departure.

Site locations for deliveries are as follows:

- Site 1 - Sabine County Maintenance Yard
300 FM 83
Hemphill, TX 75949
24,000 gallons needed (4 trips)
- Site 2 – FM 3382 (RM 352 – RM 358)
47,500 gallons needed (8 trips)

For Delivery Operations

- Make all deliveries between the hours of 8:00 am and 3:00 pm CST unless prior arrangements have been made with the Sabine County Maintenance Supervisor.



CONTROLLING PROJECT ID 6415-70-001

DISTRICT Lurkin
HIGHWAY FM0083

COUNTY Sabine

Estimate & Quantity Sheet

CONTROL SECTION JOB		6415-70-001		TOTAL EST.	TOTAL FINAL
PROJECT ID		A00190300			
COUNTY		Sabine			
HIGHWAY		FM0083			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	801Q-6252	CRS2P (DEL) (SITE 1)	GAL	24,000.000	
	801Q-6253	CRS2P (DEL) (SITE 2)	GAL	47,500.000	
				24,000.000	
				47,500.000	




Report Generated By: txdotconnect_internal_ext

Report Created On: Jul 23, 2022 10:30:16 AM

DISTRICT	COUNTY	COSJ	SHEET
Lurkin	Sabine	6415-70-001	4

SUMMARY OF MATERIALS ITEMS			
ITEM NO.		8010-6252	8010-6253
COUNTY	HIGHWAY NO.	CRS2P (DEL)(SITE 1)	CRS2P (DEL)(SITE 2)
		GAL	
SABINE	SITE 1 Sabine County Maintenance Yard 300 FM 83 Hemphill, TX 75949	24,000	
SABINE	SITE 2: FM 3173 (RM 746-750)		47,500
PROJECT TOTALS		24,000	47,500

QUANTITY SUMMARIES			
© 2022  Texas Department of Transportation®			
CONT	SECT	JOB	HIGHWAY
6399	49	001	FM 83, ETC
DIST	COUNTY		SHEET NO.
LFK	SABINE		5