

SEE SHEET 2 FOR
INDEX OF SHEETS

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION


PLANS OF PROPOSED HIGHWAY MATERIAL MAINTENANCE CONTRACT

| STATE MAINTENANCE PROJECT NO. | | | |
|-------------------------------|----------------|-----|--------------|
| 6418-03-001 | | | |
| CONT | SECT | JOB | HIGHWAY |
| 6418 | 03 | 001 | SH 118, ETC. |
| DIST | COUNTY | | SHEET NO. |
| ELP | BREWSTER, ETC. | | 1 |

TYPE OF WORK:
**ASPHALTIC PATCH MATERIAL
(MATERIALS ONLY)**

PROJECT NO.: MMC 6418-03-001
ALPINE AREA OFFICE

HIGHWAY: SH 118, ETC.
LIMITS OF WORK: VARIOUS

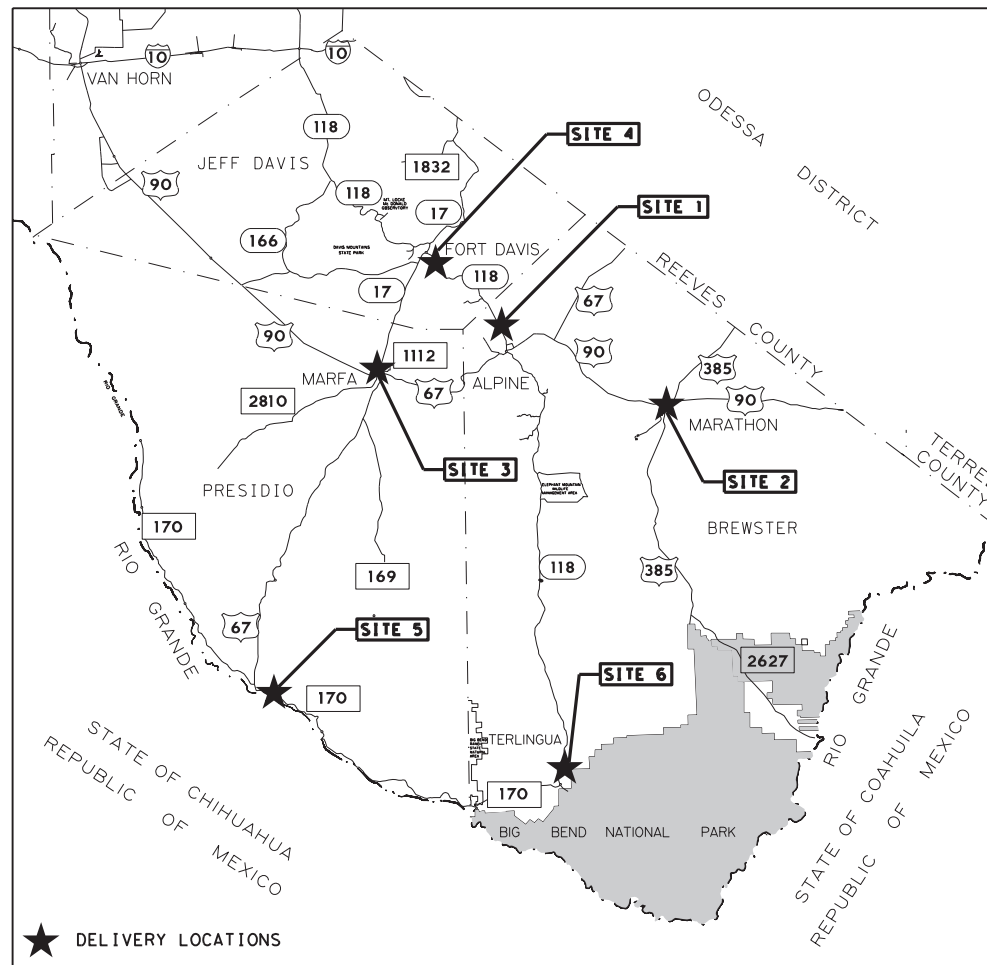

★ DELIVERY LOCATIONS

EXCEPTIONS: N/A
EQUATIONS: N/A
RAILROAD CROSSINGS: N/A



RECOMMENDED FOR LETTING: 7/29/2022

DocuSigned by:
Claudia Moreno
C858704329AA44D... INEER/CONTRACT MANAGER

APPROVED FOR LETTING: 7/29/2022

DocuSigned by:
Quar Medina, P.E.
2D8D99B8F780488... MAINTENANCE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION,
NOVEMBER 1, 2014 AND SPECIFICATION ITEMS INCLUDED IN THE CONTRACT
SHALL GOVERN ON THIS PROJECT.

DATE: 7/28/2022 3:09:41 PM
FILE: I:\ELP\MAINT\Contracts\Alpine Area Office\MMC 6418-03-001 Patching Material (Tri-County)\1 - DESIGN\Plan Set\AAO_TITLE_SHEET.dgn


INDEX OF SHEETS

| <u>SHEET NO.</u> | <u>DESCRIPTION</u> |
|------------------|---------------------|
| | GENERAL |
| 1 | TITLE SHEET |
| 2 | INDEX OF SHEETS |
| 3, 3A | GENERAL NOTES |
| 4 | ESTIMATE & QUANTITY |
| 5 | QUANTITY SUMMARY |

DATE: 7/28/2022 3:09:42 PM
 FILE: I:\ELPMINT\Contracts\Alpine Area Office\MMC 6418-03-001 Patching Material (Tri-County)\1 - DESIGN\Plan Set\AAO_INDEX_OF_SHEETS.dgn

GENERAL
 INDEX OF SHEETS

SHEET 1 OF 1

| | | | |
|--|----------------|-----|--------------|
|  Texas Department of Transportation | | | |
| CONT | SECT | JOB | HIGHWAY |
| 6418 | 03 | 001 | SH 118, ETC. |
| DIST | COUNTY | | SHEET NO. |
| ELP | BREWSTER, ETC. | | 2 |

CONTROL: 6418-03-001**COUNTY: BEWTSER, ECT.****HIGHWAY: SH 118, ETC.****GENERAL NOTES:**

General Project Description – This material maintenance contract is for the furnishing and delivery of asphaltic concrete patching material to the maintenance offices in Brewster, Jeff Davis and Presidio Counties listed in Item 8019.

The Contract will be managed by the **Alpine Area Office** with participating Area Engineer (AE) and Maintenance Section Supervisor (MSS) listed below:

Christopher Weber, P.E., Alpine AE
2400 N. SH 118
Alpine, Texas 79830
(432) 837-7804

Anthony Marquez, Alpine/Marathon MSS
2400 N. SH 118
Alpine, Texas 79830
(432) 294-0695

Carlos Mendoza, Presidio/Terlingua MSS
East FM 170
Presidio, Texas 79845
(432) 371-2280

Robert Gray, Marfa/Ft. Davis MSS
809 W San Antonio St.
Marfa, Texas 79843
(432) 426-3991

Each Contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process all contracts at the same time.

General Requirements

Tests to be in accordance with the Department's Standard Test Methods.

Perform all work for this Contract in accordance with the Texas Department of Transportation Standard Specifications for Construction and Maintenance of Highways, Streets and Bridges (2014) and all applicable State Standards.

Various bid items and their associated quantities have been provided within this Contract to establish unit bid prices for the proposed work. The bid items and quantities provided are based on historical data and are not guaranteed. Actual quantities of work to be performed and paid will be determined in the field by the Engineer and will be paid utilizing these unit bid prices with no further compensation made regardless of the final quantities.

The Department reserves the right to reduce or increase all quantities within guidelines provided in the Standard Specifications.

Obtain Engineer approval for all equipment and vehicles prior to use.

CONTROL: 6418-03-001**SHEET 3****COUNTY: BREWSTER, ETC.****HIGHWAY: SH 118, ETC.**

Repair any existing pavement, utilities, structures, etc., damaged by the Contractor's operations, at no additional cost to the Department.

ITEM 2 – INSTRUCTIONS TO BIDDERS

This Contract includes plan sheets that are not part of the bid proposal.

View plans on-line or download from the web at:

<http://www.txdot.gov/business/plansonline/plansonline.html>

Order plans from any of the plan reproduction companies shown on the web at:

<http://www.txdot.gov/business/letting-bids/repro-companies.html>

Contractor questions on this project are to be emailed to the following individual:

Claudia Moreno Claudia.MorenoMartinez@txdot.gov

Contractor questions will only be accepted through email to the above individual.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<ftp://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/EI%20Paso%20District/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Request a proposal electronically from the Department's website:

<http://www.txdot.gov/business-cq/pr.htm>

Or use the electronic bidding site:

<http://www.txdot.gov/business/letting-bids/ebs.html>

A bid summation will be available on-line at:

<http://www.txdot.gov/business/bt.html>

ITEM 3 – AWARD AND EXECUTION

Prior to beginning operations, schedule, and attend a pre-work meeting with the Engineer.

The Contract duration is for four (4) months. Time charges and work will start on the day stated on the Work Authorization letter. The Contract will be in effect until the work on the last callout is completed.

CONTROL: 6418-03-001

COUNTY: BEWTSER, ECT.

HIGHWAY: SH 118, ETC.

ITEM 7 – LEGAL RELATIONS AND RESPONSIBILITIES

No significant traffic generator events identified.

Comply with all OSHA and EPA regulations as well as all local laws, ordinances, federal, and state requirements.

OSHA regulations prohibit operations that bring people or equipment within 10 feet of an energized electrical line. Where workers and/or equipment may be close to an energized electrical line, notify the electrical power company and make all necessary adjustments to ensure the safety of workers near the energized line.

Do not discharge any liquid pollutants from vehicles onto the roadside. Immediately clean spills and dispose of in compliance with local, state, and federal regulations to the satisfaction of the Engineer at no additional cost to the Department.

ITEM 8– PROSECUTION AND PROGRESS

This project to be completed in 120 calendar days in accordance with Section 8.3.1.5, “Calendar Day.”

CONTROL: 6418-03-001

SHEET 3A

COUNTY: BREWSTER, ETC.

HIGHWAY: SH 118, ETC.

ITEM 8019 – ASPHALTIC CONCRETE PATCHING MATERIAL (STOCKPILE STORAGE OR BAGGED) (MATERIALS ONLY)

Contractor shall deliver all season pre-coated patching mixture (ASPPM), SAC B or better material in end dump trailer at the specific delivery locations shown in Table 1.

Table 1: Material Description & Delivery Locations

| SITE NUMBER | ITEM BID CODE | MATERIAL DESCRIPTION | DELIVERY LOCATION |
|--------------------|----------------------|--|--|
| 1 | 8019 6023 | ASPH CONC PAT MAT (ASPPM) (DEL) (SITE 1) | 2400 N Hwy 118 Alpine, Texas 79830 |
| 2 | 8019 6024 | ASPH CONC PAT MAT (ASPPM) (DEL) (SITE 2) | 300 N 3rd Street Marathon, Texas 79830 |
| 3 | 8019 6025 | ASPH CONC PAT MAT (ASPPM) (DEL) (SITE 3) | 809 W San Antonio St. Marfa, Texas 79734 |
| 4 | 8019 6026 | ASPH CONC PAT MAT (ASPPM) (DEL) (SITE 4) | 104 Musquiz Dr. Fort Davis, Texas 79734 |
| 5 | 8019 6027 | ASPH CONC PAT MAT (ASPPM) (DEL) (SITE 5) | 200 E FM 170 Presidio, Texas 79745 |
| 6 | 8019 6028 | ASPH CONC PAT MAT (ASPPM) (DEL) (SITE 6) | 23223 FM 170 Terlingua, Texas 79852 |



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6418-03-001

DISTRICT El Paso
HIGHWAY SH0118

COUNTY Brewster

| CONTROL SECTION JOB | | | | 6418-03-001 | | TOTAL EST. | TOTAL FINAL |
|----------------------------|-----------------|---------------------------------------|-------------|--------------------|-------|------------|-------------|
| PROJECT ID | | | | A00190561 | | | |
| COUNTY | | | | Brewster | | | |
| HIGHWAY | | | | SH0118 | | | |
| ALT | BID CODE | DESCRIPTION | UNIT | EST. | FINAL | | |
| | 8019-6023 | ASPH CONC PAT MAT(ASPPM)(DEL)(SITE 1) | TON | 100.000 | | 100.000 | |
| | 8019-6024 | ASPH CONC PAT MAT(ASPPM)(DEL)(SITE 2) | TON | 75.000 | | 75.000 | |
| | 8019-6025 | ASPH CONC PAT MAT(ASPPM)(DEL)(SITE 3) | TON | 75.000 | | 75.000 | |
| | 8019-6026 | ASPH CONC PAT MAT(ASPPM)(DEL)(SITE 4) | TON | 75.000 | | 75.000 | |
| | 8019-6027 | ASPH CONC PAT MAT(ASPPM)(DEL)(SITE 5) | TON | 150.000 | | 150.000 | |
| | 8019-6028 | ASPH CONC PAT MAT(ASPPM)(DEL)(SITE 6) | TON | 150.000 | | 150.000 | |


| | | | |
|----------|----------|-------------|-------|
| DISTRICT | COUNTY | CCSJ | SHEET |
| El Paso | Brewster | 6418-03-001 | 4 |

DATE: 7/28/2022 3:09:46 PM
 FILE: I:\ELPMINT\Contracts\Alpine Area Office\MMC 6418-03-001 Patching Material (Tri-County)\1 - DESIGN\Plan Set\AAO_QUANTITY_SUMMARY.dgn

| SUMMARY OF ROADWAY ITEMS | | | | | | |
|--------------------------|--|--|--|--|--|--|
| LOCATION | 8019 | 8019 | 8019 | 8019 | 8019 | 8019 |
| | 6023 | 6024 | 6025 | 6026 | 6027 | 6028 |
| | ASPH CONC PAT MAT(ASPPM)(DEL) (SITE 1) | ASPH CONC PAT MAT(ASPPM)(DEL) (SITE 2) | ASPH CONC PAT MAT(ASPPM)(DEL) (SITE 3) | ASPH CONC PAT MAT(ASPPM)(DEL) (SITE 4) | ASPH CONC PAT MAT(ASPPM)(DEL) (SITE 5) | ASPH CONC PAT MAT(ASPPM)(DEL) (SITE 6) |
| | TON | TON | TON | TON | TON | TON |
| MMC 6418-03-001 | 100 | 75 | 75 | 75 | 150 | 150 |
| PROJECT TOTALS | 100 | 75 | 75 | 75 | 150 | 150 |

ALPINE AREA OFFICE
GENERAL
QUANTITY SUMMARY

SHEET 1 OF 1

| | | | |
|---|----------------|-----|--------------|
|  Texas Department of Transportation | | | |
| CONT | SECT | JOB | HIGHWAY |
| 6418 | 03 | 001 | SH 118, ETC. |
| DIST | COUNTY | | SHEET NO. |
| ELP | BREWSTER, ETC. | | 5 |