

STATE OF TEXAS

DEPARTMENT OF TRANSPORTATION


MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC - 642388001
 CSJ 6423-88-001
 HIGHWAY: US0377
 DELIVERY LOCATION(S): SEE LOCATION MAP

**FOR PURCHASE AND DELIVERY OF MATERIALS ONLY:
 HOT-MIX COLD-LAID ASPHALT CONCRETE
 PAVEMENT (MATERIALS ONLY)**

Submitted for Letting: 9/22/2022
 Date

Approved for Letting: 9/22/2022
 Date

DocuSigned by:

 76C8A3E5D7D24C9...
 Contract Specialist

DocuSigned by:

 5D8F6D958F8543B...
 Interim Director of Operations

INDEX OF SHEETS

- 1 TITLE SHEET
- 2-4 GENERAL NOTES
- 5 ESTIMATE & QUANTITY SHEET
- 6 STOCKPILE LOCATION MAP

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.



©2022

FED.RD. DIV.NO.	PROJECT NO.		SHEET NO.
#	MMC - 642388001		1
STATE	DISTRICT	COUNTY	
TEXAS	BWD	BROWN	
CONTROL	SECTION	JOB	HWY NO.
6423	88	001	US0377
FILENAME			DATE
MMC - 642388001			09/22/2022

Project Number: MMC-642388001

County: BROWN

Control: 6423-88-001

Highway: US0377

GENERAL NOTES

This project is for Brown County only. Delivery location Site 1 can be anywhere in Brown County.

The Engineer will specify the number of WORKING DAYS granted for each WORK ORDER based on appropriate production and delivery rates.

The Engineer will notify the Contractor by email no later than 5:00PM the day before to cancel either a delivery by the Contractor or to cancel a pickup by TxDOT, along with a revised WORK ORDER reflecting this change.

ITEM 2 INSTRUCTIONS TO BIDDERS

Contractor questions on this project are to be addressed to the following individual(s):

Name	Email Address
Blake Stembridge	blake.stembridge@txdot.gov

Contractor questions will be accepted through email by the above individual.

All Contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

View plan sheets on-line or download from the web at:
<https://www.txdot.gov/business/letting-bids/plans-online.html>

Order plans from any of the plan reproduction companies shown on the web at:
<https://www.txdot.gov/business/letting-bids/repro-companies.html>

Below is a link to TxDOT's website that explains the State's new bidding process for MATERIAL CONTRACTS and the steps for prospective bidders to follow in preparation of a bid:
<https://www.txdot.gov/business/letting-bids/attention-vendors.html>

Project Number: MMC-642388001

County: BROWN

Control: 6423-88-001

Highway: US0377

To bid TxDOT's Maintenance Materials Contracts (MMC), bidders must provide a completed Maintenance/Traffic Materials Contract Supplier's Questionnaire (MQ) and related supporting documents. The questionnaire can be downloaded from the above website.

By signing this proposal, the bidder acknowledges they have a copy of the "Standard Specifications for Construction of Highways, Streets and Bridges", adopted by the Texas Department of Transportation, November 1, 2014.

ITEM 3 AWARD AND EXECUTION OF CONTRACT

Each Contract awarded by the Department stands on its own and as such, is separate from other Contracts. A Contractor awarded multiple Contracts, must be capable and sufficiently staffed to concurrently process any or all Contracts at the same time.

ITEM 4 SCOPE OF WORK

If agreed upon in writing by both parties to the Contract, the Contract may be extended up to two (2) times in accordance with Special Provision 004-004.

This Contract requires the Contractor to provide Materials in accordance with ITEM 8013 HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY) by the following method(s):

1. Delivered by the Contractor to a designated location as defined in each WORK ORDER issued by TxDOT or the assigned representative.

ITEM 8 PROSECUTION AND PROGRESS

One-hundred and twenty (120) days have been designated for this Contract. CONTRACT TIME CHARGES begin upon issuance of the "Authorization to Begin Work" letter.

CONTRACT TIME CHARGES will be computed and charged in accordance with Article 8.3.1.5 "Calendar Day".

Individual WORK ORDER charge days shall run concurrently with CONTRACT TIME CHARGES.

Material requests will be issued by WORK ORDER. Each WORK ORDER will specify the following:

1. The type and quantity of material to be delivered and/or picked-up each day,
2. The Contractor's delivery location(s),
3. The number of WORKING DAYS to complete the WORK ORDER,
4. The type of haul vehicle the Contractor shall use in the delivery.

Project Number: MMC-642388001

County: BROWN

Control: 6423-88-001

Highway: US0377

The Contractor shall have the capability to deliver material using end dumps.

Contractor deliveries and TxDOT pickups will typically occur between the hours of 7:00AM and 4:00 PM CST. Prior arrangements will be made with the Engineer if deliveries or pickups are outside these hours.

Contractor's driver shall report to the Engineer or representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time on the haul ticket which will include the WORK ORDER number.

NONCOMPLIANCE LIQUIDATED DAMAGES: In cases where Contractor delivery does not arrive at the time and/or location specified in the WORK ORDER, a NONCOMPLIANCE LIQUIDATED DAMAGES charge will be assessed for each occurrence for the amount specified in Special Provision 000-658.

NONCOMPLIANCE LIQUIDATED DAMAGES will be deducted from the payment estimate period the incident(s) occurred.

ITEM 9 MEASUREMENT AND PAYMENT

This Contract is considered a CALL-OUT Contract and Plans Quantity Measurement does not apply. Quantities shown in the plans are for bidding purposes only. The State does not guarantee that all quantities shown in the plans will be requested for delivery or pickup.

ITEM 8013 HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY)

Delivery costs incurred by the Contractor are subsidiary to this Item.

Use aggregate that meets the SAC requirement of Class B or better.

Asphalt shall be AC-0.6 unless otherwise approved by the Engineer.

The Plant is the designated aggregate sampling location, unless otherwise approved by the Engineer.


Material deliveries shall be covered by a tarp during transport.

ESTIMATE SUMMARY

ITEM- CODE			DESCRIPTION	U N I T	TOTAL	
ITEM NO	DESC CODE	SP NO			EST.	FINAL
8013	6003	000	HMCL ACP TYPE B (DELIVERY) (SITE 1)	TON	2,000.000	

ESTIMATE & QUANTITY SHEET

STATE DIST. NO. <div style="text-align: center;">23</div>	COUNTY <div style="text-align: center;">BROWN</div>	PROJECT NO. <div style="text-align: center;">MMC-642388001</div>	SHEET NO. <div style="text-align: center;">5</div>
--	--	---	---

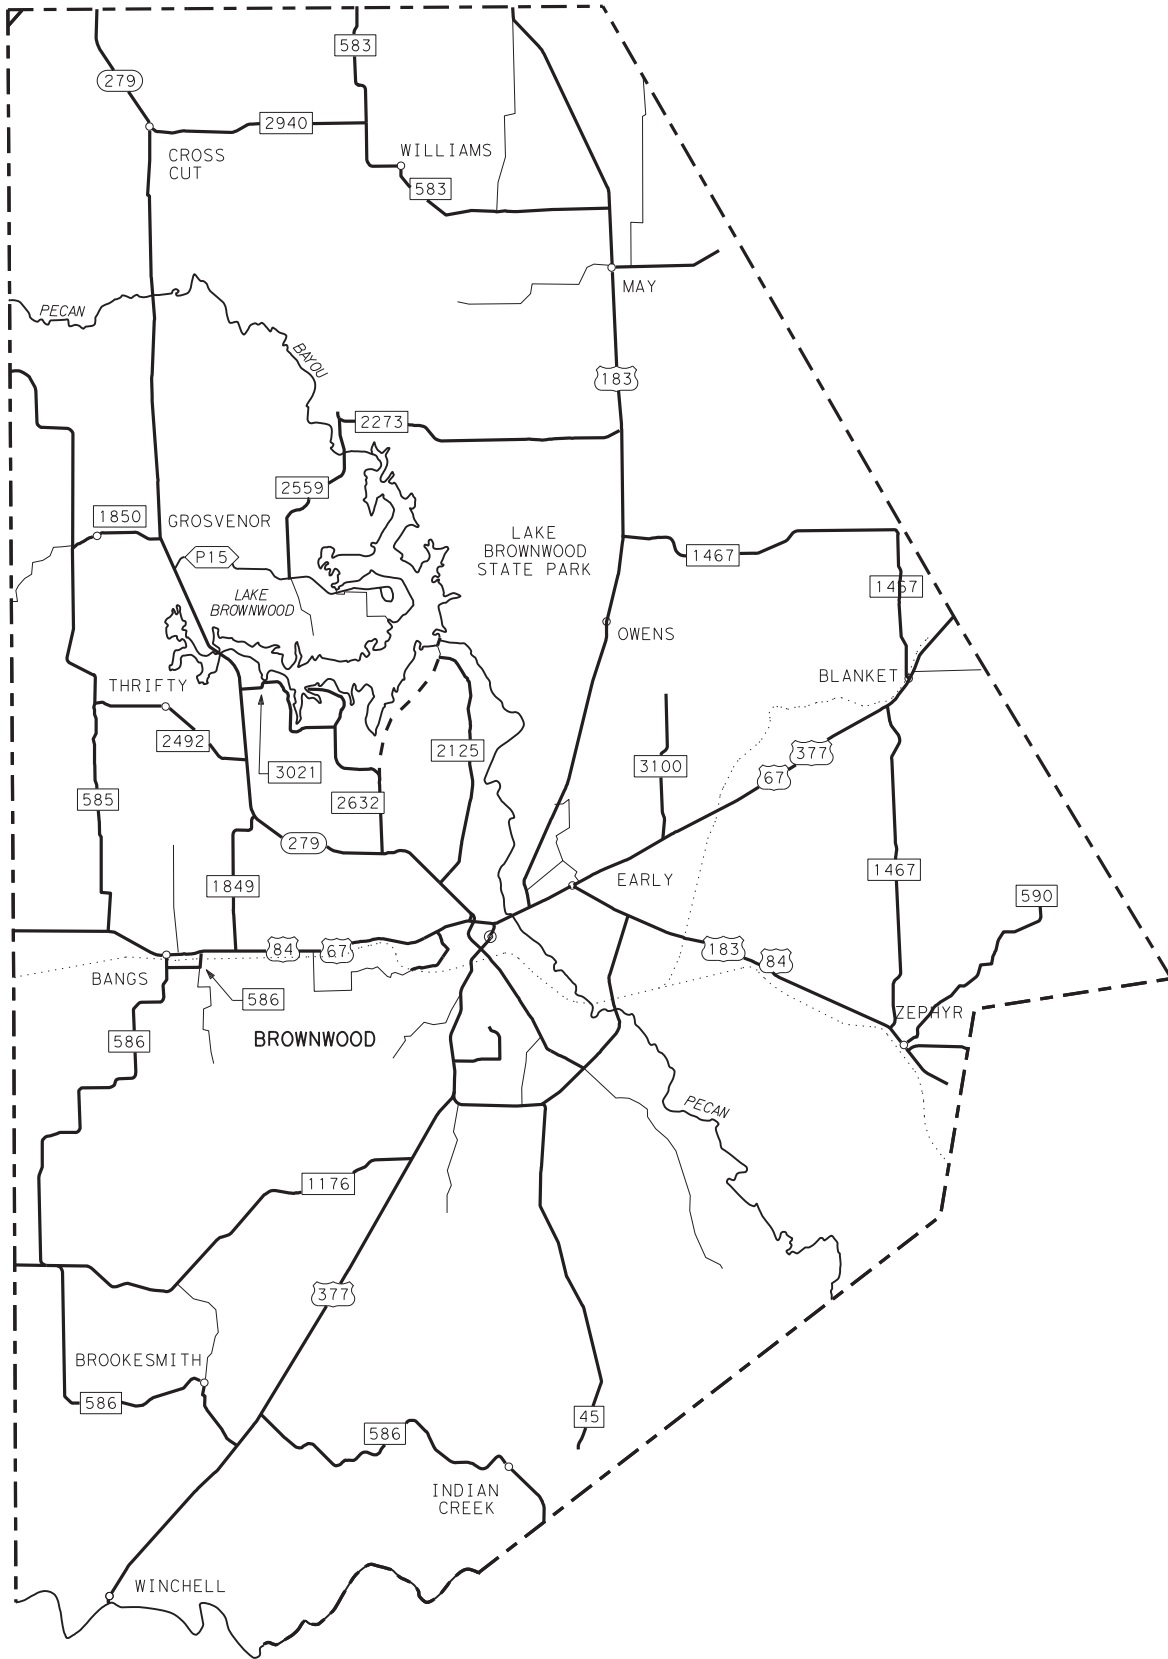

*NOTE:
SITE 1 DELIVERY LOCATION CAN BE ANYWHERE IN BROWN COUNTY.



SITE	ITEM	DESCRIPTION	UNIT	QTY
1	8013-6003	HMCL ACP TY B (DELIVERY)(SITE 1)	TONS	2,000

FED. RD. DIV. NO.	MAINTENANCE PROJECT NO.		SHEET NO.
6	MMC-642388001		6
STATE	DIST.	COUNTY	
TEXAS	23	BROWN	
CONT.	SECT.	JOB	HIGHWAY NO.
6423	88	001	US 377