

**INDEX OF SHEETS**

SHEET NO. DESCRIPTION


- GENERAL**
- 1 TITLE SHEET
  - 2 GENERAL NOTES
  - 3 ESTIMATE AND QUANTITY SHEET

**STATE OF TEXAS  
TEXAS DEPARTMENT OF TRANSPORTATION**

**WORK CONSISTING OF HOT-MIX COLD-LAID  
ASPHALT CONCRETE PAVEMENT DELIVERY  
(MATERIALS ONLY)**

PROJECT NO: MMC 6391-68-001  
COUNTY: WHARTON


FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
	MMC 6391-68-001	1
STATE	STATE DIST.	COUNTY
TEXAS	YKM	WHARTON
CONT.	SECT.	JOB
		HIGHWAY NO.
		US 59

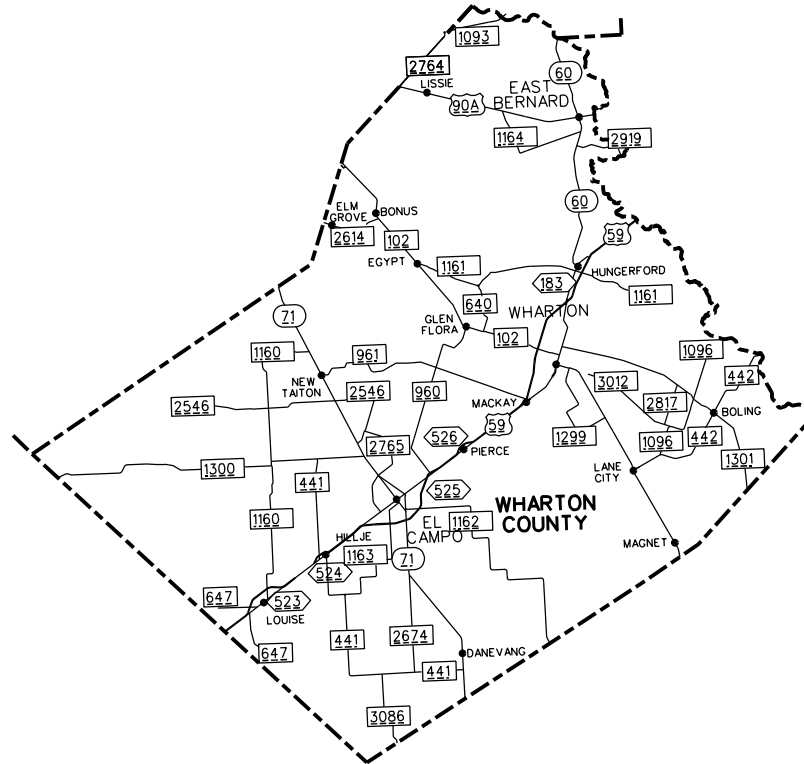

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

*Mark C. Netardus* P.E., 12-13-22  
MAINTENANCE ENGINEER DATE

**WHARTON COUNTY**  
**YOAKUM DISTRICT**



12-13-22  
*Michael Brzozowski* PE  
DIRECTOR OF OPERATIONS

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT:

EXCEPTIONS: NONE  
EQUATIONS: NONE  
RAILROAD CROSSING: NONE



© 2023 by Texas Department of Transportation. All rights reserved.

YOAKUM DISTRICT

**Project Number: MMC 6391-68-001**

**County: WHARTON**

**GENERAL NOTES:**

This is a contract for supplying material on an as needed basis.

Bid price should include furnishing material and delivery within the county or to designated location(s) specified.

Contractor questions on this project are to be addressed to the following individual(s):

Mark Netardus [Mark.Netardus@txdot.gov](mailto:Mark.Netardus@txdot.gov)

Michael Brzozowski [Michael.Brzozowski@txddot.gov](mailto:Michael.Brzozowski@txddot.gov)

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:  
<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

The Maintenance Supervisor for Wharton County is Troy Blankenburg @ 361-212-0034.

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered.

The contractor is responsible for furnishing and delivering the hot-mix cold-laid asphalt concrete pavement to the Wharton Maintenance Yard. The delivery hours will be Monday through Thursday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

**Project Number: MMC 6391-68-001**

**County: WHARTON**

**ITEM 8013: HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT  
(MATERIALS ONLY)**

Deliver Hot Mix Cold Laid to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.

There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.



# Estimate & Quantity Sheet

**CONTROLLING PROJECT ID** 6391-68-001

**DISTRICT** Yoakum

**COUNTY** Wharton

**HIGHWAY** US0059

<b>CONTROL SECTION JOB</b>				<b>6391-68-001</b>		TOTAL EST.	TOTAL FINAL
<b>PROJECT ID</b>				<b>A00182425</b>			
<b>COUNTY</b>				<b>Wharton</b>			
<b>HIGHWAY</b>				<b>US0059</b>			
<b>ALT</b>	<b>BID CODE</b>	<b>DESCRIPTION</b>	<b>UNIT</b>	EST.	FINAL		
	8013-6002	HMCL ACP TYPE D SAC-B AC-0.6 (DELIVERY)	TON	2,500.000		2,500.000	