

STATE OF TEXAS
TEXAS DEPARTMENT OF TRANSPORTATION


MATERIALS MAINTENANCE CONTRACT

PROJECT NO: MMC 6435-46-001

CSJ: 6435-46-001

LIMITS: *

FOR PURCHASE, DELIVERY & PICK-UP OF MATERIALS ONLY:
DENSE-GRADE HOT-MIX ASPHALT

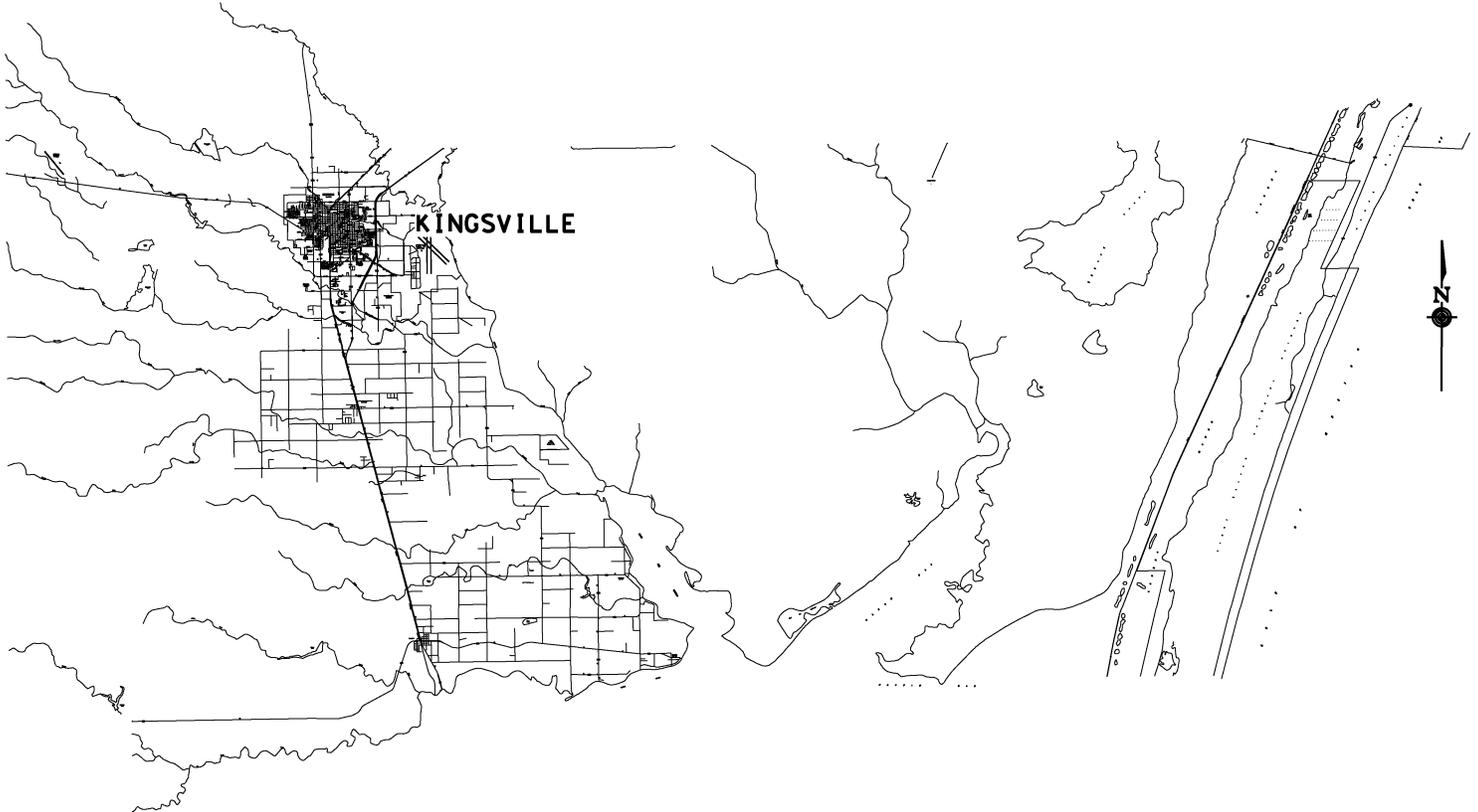

*KINGSVILLE MAINTENANCE OFFICE AREA OF RESPONSIBILITY

INDEX OF SHEETS

- 1 TITLE SHEET
- 2A-2D GENERAL NOTES
- 3 ESTIMATE & QUANTITY SHEET
- 4 PLAN SHEET & SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT



TEXAS DEPARTMENT OF TRANSPORTATION

SUBMITTED 1/23/2023
FOR LETTING
DocuSigned by:

Armando Bosquez

BRIDGE ENGINEER

APPROVED 1/23/2023
FOR LETTING
DocuSigned by:

James Harris

DIRECTOR OF MAINTENANCE

County: Kleberg

Control: 6435-46-001

GENERAL NOTES:

This contract shall commence upon the issuance of a work order by the Director of Maintenance or his representative and shall continue for 180 calendar days. This project consists of described word defined with item “8011 delivery of Dense-Graded Hot-Mix, Asphalt materials from the hot-mix asphalt plant to the Maintenance Section’s designated locations specified”, the 2014 Texas Standard Specifications, General Notes and Plans. See estimate and quantity sheet for type and quantity of materials.

This purpose of this contract is to supply Hot Mix D-GR HMA (SQ) TY D PG 64-22 (DELIVERY), at the following locations:

Sites	Kingsville Maintenance Office – Area of Responsibility
-------	--

Coordinate work through the following individuals:

Area Engineer	Address	Contact Person
Lucio Ramos Area Engineer	1071 North US Hwy 281 Alice, TX 78332	Lucio Ramos Lucio.Ramos@txdot.gov
Maintenance Section	Address	Maintenance Supervisor
Alfredo Gaona Maintenance Supervisor	1802 N. 14 th St. Kingsville, TX 78363	Alfredo Gaona Alfredo.Gaona@txdot.gov

Section 10.2 - Instructions to Bidders:

This project includes plan sheets that are not part of the bid proposal. View or download plans at:

<https://www.dot.state.tx.us/business/plansonline/ftpinfo.htm>

All Contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

County: Kleberg

Control: 6435-46-001

SECTION 10.3 – AWARD AND EXECUTION OF CONTRACT:

If several contracts are awarded to the same contractor, the contractor shall be sufficiently equipped to concurrently supply each contract material. Each contract awarded by the Department stands on its own and as such, is separate from other contracts.

Material requests shall be issued by Work Order to the Contractor a minimum of 5 calendar days in advance unless expedited items therefore allowing a minimum of 48 hours. Each Work Order shall specify quantities to be delivered, location of delivery, and days to complete Work Order. A minimum of 250 Tons per work order will be required for delivery only.

Section 10.4 – Scope of Work:

Prior to beginning operations, schedule and participate in a coordination call or virtual meetings with the Engineer or designated representative to establish points of contact for communication, an issue escalation ladder, delivery location details, and other Contract requirements. Work with Engineer to resolve or escalate all issues.

In accordance with Article 10.4.3, TXDOT does not guarantee a specific volume to be purchased. No minimum compensation to the Contractor is guaranteed. Quantities indicated for each Item in the Contract are estimates only and are based on the previous usage. These estimates should not be construed as a minimum or maximum quantity to be ordered. The acceptance of this contract also does not guarantee that any specific volume will be purchased.

If a delivery location changes by more than five miles, either party can request an adjustment to the Contract for changes in freight trucking cost.

SECTION 10.6 – CONTROL OF MATERIALS:

The Contractor is responsible for furnishing and delivering the Dense-Graded Hot Mix Asphalt Materials to the agreed upon location(s). The delivery hours will be Monday through Friday 7:00 AM to 5:00 PM. Contractor shall furnish all material in accordance with applicable specifications, test methods and general notes in the Contract and as directed by the Engineer.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

Section 10.8 - Prosecution and Progress:

Contract time charges shall begin upon issuance of "Authorization to Begin Work" letter. This contract is for one-hundred and eighty (180) calendar days and shall be computed and charged in accordance with Article 10.8.2, "Contract Term".

County: Kleberg

Control: 6435-46-001

All material delivery tickets must include the Work Order number and be signed, dated, and list the arrival/departure times by the Department representative upon arrival at final delivery location.

In the event of a delay in delivery of materials notify the Maintenance Supervisor for the work order immediately by phone and provide documentation, in writing, to the office of record upon completion of delivery.

Failure to complete a work order will incur damages in accordance with Article 10.8.6. Actual damages incurred will be deducted from the work order payment and calculations will be provided upon request.

SECTION 10.9 – MEASUREMENT AND PAYMENT:

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

Trucks may be held up for 2-hours at the jobsite at no additional expense to the Department. Written documentation of arrival will be used when calculation demurrage charges and included on an invoice submitted to the managing office. The Department will specify the arrival time and delivery frequency on the work order provided to the Contractor. If the Contractor arrives prior to the specified delivery time, the 2-hour hold will not begin until the arrival time specified on the work order.

Contractor will provide demurrage rate per truck, per 15-min increment, and the Coordination call prior to beginning work on the Contract.

Demurrage charges will be invoiced in 15-min increments, rounded down to the nearest whole increment. Contractor will be required to provide documentation for the demurrage per truck.

ITEM 8011 – Dense-Graded Hot-Mix Asphalt (Small Quantity) (Materials Only)

Mixture designs, without additives, failing to meet the requirements of Table 6 will require the addition of a minimum 1.0% of Type A hydrated lime based on dry weight of the total aggregate.

Use of Recycled Asphalt Shingles (RAS) in the HMACP surface course is not permitted.

Do not add additional quantity of RAP to stockpiles tested and approved. If additional RAP is added to a stockpile, a new design and trial batch will be required prior to placement on the roadway.

The extracted aggregate from contractor-owned RAP shall have a minimum of 85% two crushed faces when tested in accordance with TEX-460-A, Part I.


County: Kleberg

Control: 6435-46-001

Deliver Hot Mix to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.

There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site. All deliveries made to Maintenance Yard will be worked out between Maintenance Supervisor and Contractor.

Alfredo Gaona
361-592-7361

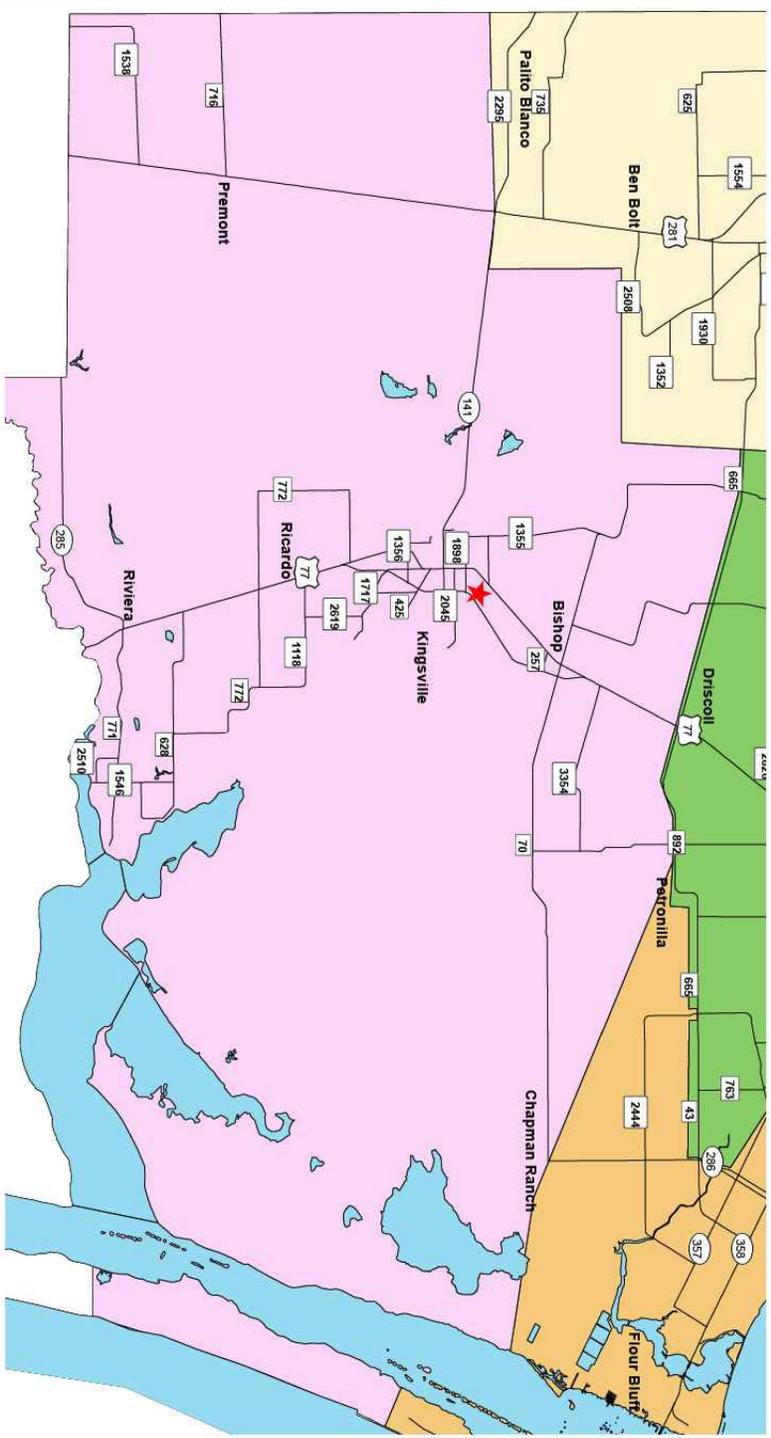

**PLAN SHEET
& SUMMARY**

ITEM NO.	DESC NO.	SPEC NO.	DESCRIPTION	UNIT	QTY
8011	6001		D-GR HMA (SQ) TY D PG 64-22 (PICKUP)	TON	300
8011	6002		D-GR HMA (SQ) TY D PG 64-22 (DELIVERY)	TON	2,200



CONT	SECT	JOB	HIGHWAY
5435	46	001	US 77
DIST	COUNTY	SHEET NO.	
16	KLEBERG	4	