

STATE OF TEXAS

DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT

PROJECT: MMC-643126001
 CSJ: 6431-26-001
 HIGHWAY: US 80
 LIMITS OF WORK: Henderson, Anderson, Wood and Van Zandt Counties
 Tyler District


FOR PURCHASE AND DELIVERY OF MATERIALS ONLY
 MATERIAL: FLEXIBLE BASE

SUBMITTED FOR
 LETTING: 12/29/2022
 DATE

APPROVED FOR
 LETTING: 12/29/2022
 DATE

DocuSigned by:


A5232B54E54A408...
 TRANSPORTATION ENGINEER

DocuSigned by:

0037DA7E001A4D2...
 DIRECTOR OF MAINTENANCE

INDEX OF SHEETS

- 1 TITLE SHEET
- 2A-2D GENERAL NOTES
- 3 ESTIMATE & QUANTITY SHEET
- 4 PLAN SHEET & SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATIONS ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

© 2022			
FED RD DIV NO.	PROJECT NO.	SHEET NO.	
6	6431-26-001	1	
STATE	DISTRICT	COUNTY	
TEXAS	TYLER	WOOD	
CONTROL	SECTION	JOB	HIGHWAY NO.
6431	26	1	US 80
FILENAME			DATE
MMC_643126001			12/28/2022

County: WOOD

Control: 6431-26-001

Highway: US 80

GENERAL NOTES: FLEXBASE

GENERAL

Contractor questions on this project are to be emailed to the following individual(s):

Area Engineer	Lance Pomykal, P.E.	Lance.Pomykal@txdot.gov
Asst. Area Engineer	Vacant- TBD	

Contractor questions will only be accepted through email, phone, and in person to the above individuals. All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT’s Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

.....
SPECIAL PROVISION TO ITEM 10: ITEM 10 APPLIES TO MAINTENANCE MATERIALS (MMC) AND TRAFFIC MATERIALS CONTRACTS (TMC) WITH NO FEDERAL FUNDS BEING USED. ITEMS 1-9 DO NOT APPLY TO MMC AND TMC CONTRACTS.

The intent of this contract is to provide flexbase materials at location sites in the Athens, Palestine, Mineola and Canton Maintenance Sections (Henderson, Anderson, Wood and Van Zandt Counties.) The contractor will provide materials.

A map of Henderson, Anderson, Wood and Van Zandt Counties are included in this contract.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts.

Material requests shall be issued by Work Order. Each Work Order shall be scheduled by the assigned TxDOT representative and will specify items, quantities, and delivery location.

Each Work Order sent by the Department is independent and separate from other Work Orders held by the Contractor.

County: WOOD

Control: 6431-26-001

Highway: US 80

Prior to beginning operations, the Department will arrange a pre-construction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed.

Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surface used in hauling operations free of dirt or other materials.

Department-approved safety hats and safety vests will be worn by all workers and visitors when:

- Workers are outside of the vehicles at all outdoor worksites. This includes those who occasionally visit worksites either on the highway surface or right-of-way.
- Working in areas where there is a danger of head injury from impact, from falling or flying objects, or from electrical shock or burns.

Non-compliance with this requirement will be grounds for suspension of work.

FLEXBASE

This project shall consist of the purchase and delivery of materials only for the following Maintenance Offices in the Tyler District.

Site 1: Athens AO/Mtce Office, 2400 NE LP 7, Athens, Texas, 75752

John Oliver	Maintenance Supervisor	903-675-4196
Greg Skiles	Assistant Maintenance Supervisor	903-675-4196

Site 2: Palestine Maintenance Office, 4089 S SH 19, Palestine, Texas, 75801

Steve Thornton	Maintenance Supervisor	903-729-5834
Drew Watson	Assistant Maintenance Supervisor	903-729-5834

Site 3: Mineola AO/Mtce Office, 205 NE LP 564, Mineola, Texas, 75773

Clint Traylor	Maintenance Supervisor	903-569-2349
Michael Ellison	Assistant Maintenance Supervisor	903-569-2349

Site 4: Canton Maintenance Office, 15500 FM 1255, Canton, Texas, 75103

Sarah Hatley	Maintenance Supervisor	903-829-5092
Jason York	Assistant Maintenance Supervisor	903-829-5092

A map of these locations is included in this contract.

All work orders on this contract will be scheduled and directed by the Maintenance Supervisor or the Assistant Maintenance Supervisor or their designee.

County: WOOD

Control: 6431-26-001

Highway: US 80

SECTION 10.2 – INSTRUCTIONS TO BIDDERS:

View the plans on-line or download from the web at:

<https://www.txdot.gov/business/letting-bids/plans-online.html>

Order plans from any of the plan reproduction companies shown on the web at:

http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm

Attention Material Providers: Below is a link to TXDOT's website that explains the State's new bidding process for roadway material contracts, including the Material Supplier's Questionnaire, and the steps for prospective bidders to follow in preparation of a bid:

<https://www.txdot.gov/business/road-bridge-maintenance/contract-letting/contractor-prequalification.html>. (NOTE: Download questionnaires and open using Adobe Acrobat or other PDF viewer; otherwise, Internet Explorer is the only browser which can open as PDF.)

SECTION 10.4 – SCOPE OF WORK:

In accordance with Article 10.4.3.1, this contract may be extended one time for an additional 365 calendar days not to exceed 730 calendar days for the entire contract term if mutually agreed.

SECTION 10.6 – CONTROL OF MATERIALS:

Contractor shall furnish all material in accordance with applicable specifications, test methods and general notes in this Contract and as directed by the Engineer.

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TXDOT) can be found at the following website: <https://www.txdot.gov/business/resources/producer-list.html>.

SECTION 10.8 – PROSECUTION AND PROGRESS:

Contract time charges shall begin upon issuance of "Authorization to Begin Work" letter. This contract is for three-hundred and sixty-five (365) calendar days and shall be computed and charged in accordance with Article 10.8.2, "Contract Term".

All material delivery tickets must include the Work Order number and be signed, dated, and list the arrival/departure times by the Department representative upon arrival at final delivery location.

In the event of a delay in delivery of materials, notify the Maintenance Supervisor for the work order immediately by phone and provide documentation, in writing, to the office of record upon completion of delivery.

Failure to complete a work order will incur damages in accordance with Article 10.8.6. Actual

County: WOOD

Control: 6431-26-001

Highway: US 80

damages incurred will be deducted from the work order payment and calculations will be provided upon request.

Providing material that does not meet the requirements of the specification does not constitute delivery and the Contractor may be required to remove all failed materials from the site. Applicable damages may continue to accrue until the Contractor delivers materials in full compliance to the designated site.

Notify the contacts given above when encountering any unforeseen delays.

SECTION 10.9 – MEASUREMENT AND PAYMENT:

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

If a specified time is dictated on the Work Order and Contractor arrives prior to the specified time, the 2-hour hold will not begin until the specified arrival time on the work order.

ITEM 8007. FLEXIBLE BASE (MATERIALS ONLY):


Delivery will be Monday through Friday during business hours only unless other arrangements have been requested and agreed upon by the Maintenance Section Supervisor.

ESTIMATE SUMMARY

ITEM CODE		DESCRIPTION	U	TOTAL	
			N		
ITEM NO			DESC CODE		I
			T	EST.	FINAL
8007	6045	FL BS (STE DEL)(TY A GR 1-2)(DRPOFF)(1)	CY	2000	
8007	6046	FL BS (STE DEL)(TY A GR 1-2)(DRPOFF)(2)	CY	1000	
8007	6047	FL BS (STE DEL)(TY A GR 1-2)(DRPOFF)(3)	CY	250	
8007	6048	FL BS (STE DEL)(TY A GR 1-2)(DRPOFF)(4)	CY	700	
8007	6064	FL BS (TY E GR 1-2)(DEL)(IN VEH)(PICK UP)	CY	100	
8007	6090	FL BS (STE DEL) (TY E GR 1-2)(IN VEH)	CY	50	


ESTIMATE & QUANTITY SHEET

STATE DISTRICT NO.	COUNTY	PROJECT NO.	SHEET NO.
10/ TYLER	WOOD	MMC 643126001	3

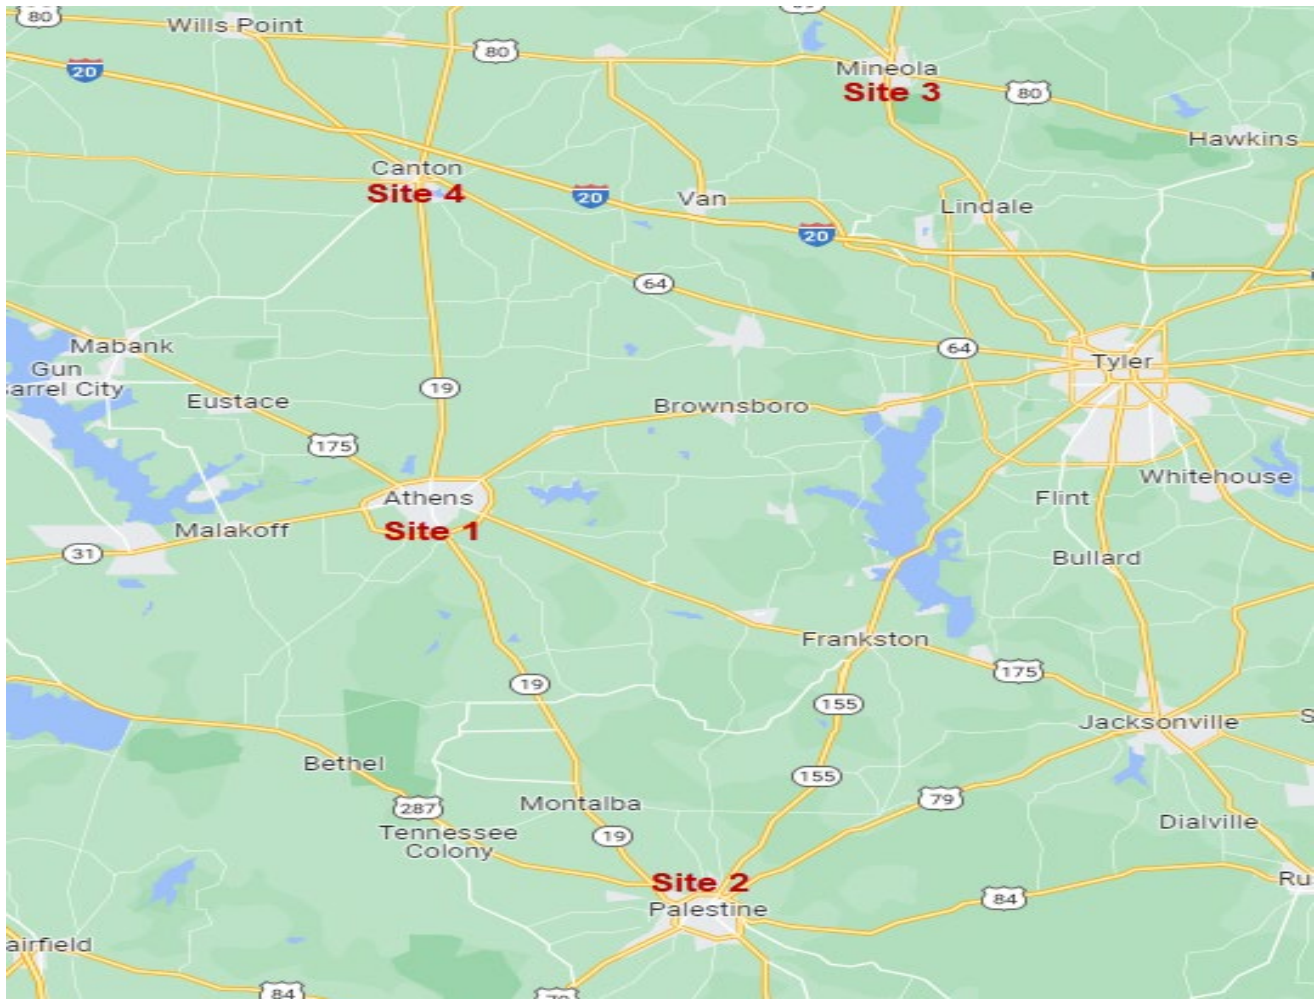

Site	Maintenance Office	County	Address
1	Athens AO/MO	Henderson	2400 NE LP 7, Athens, Tx, 75752
2	Palestine MO	Anderson	4089 S SH 19, Palestine, TX, 75801
3	Mineola AO/MO	Wood	205 NE LP 564, Mineola, TX, 75773
4	Canton MO	Van Zandt	15500 FM 1255, Canton, TX, 75103

PLAN SHEET SUMMARY

©2022	 Texas Department of Transportation		
FED RD DIV NO.	PROJECT NO.	SHEET NO.	
6	6431-26-001	1	
STATE	DISTRICT	COUNTY	
TEXAS	TYLER	WOOD	
CONTROL	SECTION	JOB	HIGHWAY NO.
6431	26	1	US 80
FILENAME			DATE
MMC_643126001			12/28/2022