

STATE OF TEXAS

DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC - 644652001
 CSJ 6446-52-001
 HIGHWAY: US0190
 DELIVERY LOCATION(S): VARIOUS

FOR PURCHASE AND DELIVERY OF MATERIALS ONLY: HOT MIX ASPHALT

Submitted for Letting: 5/22/2023
 Date

Approved for Letting: 5/22/2023
 Date

DocuSigned by:
Tina Crelia
 76C8A3E5D7D24C9...
 Contract Specialist

DocuSigned by:
Blake Stembridge
 A2E1607EC542461...
 Maintenance Engineer

INDEX OF SHEETS

- 1 TITLE SHEET
- 2-4 GENERAL NOTES
- 5 ESTIMATE & QUANTITY SHEET
- 6 STOCKPILE LOCATION MAP

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.



©2023

FED.RD. DIV.NO.	PROJECT NO.		SHEET NO.
6	MMC - 644652001		1
STATE	DISTRICT	COUNTY	
TEXAS	BWD	SAN SABA	
CONTROL	SECTION	JOB	HWY NO.
6446	52	001	US0190
FILENAME			DATE
MMC - 644652001			05/22/23

Project Number: MMC-644652001

County: SAN SABA

Control: 6446-52-001

Highway: US0190

GENERAL NOTES

This project is for San Saba County only. Delivery location Site 1 can be anywhere in San Saba County.

The Engineer will specify the number of WORKING DAYS granted for each WORK ORDER based on appropriate production and delivery rates.

The Engineer will notify the Contractor by email no later than 5:00PM the day before to either cancel a delivery by the Contractor or to cancel a pickup by TxDOT, along with a revised WORK ORDER reflecting this change.

Each Contract awarded by the Department stands on its own and as such, is separate from other Contracts. A Contractor awarded multiple Contracts, must be capable and sufficiently staffed to concurrently process any or all Contracts at the same time.

Contractor questions on this project are to be addressed to the following individual(s):

Name	Email Address
Blake Stembridge, P.E.	blake.stembridge@txdot.gov

Questions may be submitted via the Letting Pre-Bid Q&A webpage. This webpage can be accessed from the Notice to Contractors dashboard located at the following address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A webpage.

The Letting Pre-Bid Q&A webpage for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hoover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

SECTION 10.2 - INSTRUCTIONS TO BIDDERS

This project includes plan sheets that are not part of the bid proposal. View or download plans at: <https://www.txdot.gov/business/letting-bids/plans-online.html>

Project Number: MMC-644652001

County: SAN SABA

Control: 6446-52-001

Highway: US0190

SECTION 10.4 – SCOPE OF WORK

This Contract requires the Contractor to provide Materials in accordance with ITEM 8011 DENSE-GRADED HOT-MIX ASPHALT (SMALL QUANTITY) (MATERIALS ONLY) by two methods:

1. Delivered by the Contractor to a designated location as defined in each WORK ORDER issued by TxDOT or the assigned representative.

In accordance with Article 10.4.3.1, this contract may be extended twice not to exceed 540 Calendar Days for the entire contract term if mutually agreed.

SECTION 10.8 – PROSECUTION AND PROGRESS

Section 10.8.2, Contract Term will be 6 months (180 Calendar Days). Calendar Days will be charged in accordance with Article 10.8.2., "Contract Term".

Section 10.8.3., Work Orders issued will specify the following:

1. The type and quantity of material to be delivered and/or picked-up each day,
2. The Contractor's delivery location(s),
3. The number of WORKING DAYS needed in order to complete the WORK ORDER,
4. The type of haul vehicle the Contractor shall use in the delivery.

The Contractor shall have the capability to deliver material using belly dumps, super dumps/end dumps, or flow boys/live bottoms, as haul vehicles.

Contractor deliveries and TxDOT pickups will typically occur between the hours of 7:00AM and 3:30 PM CST. Prior arrangements shall be made with the Engineer if deliveries or pickups are outside these hours.

Contractor's driver shall report to the Engineer or representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time on the haul ticket, which will include the **WORK ORDER** number.

ITEM 301 ASPHALT ANTISTRIPPING AGENT

When the Contractor adds lime as an anti-stripping agent (or an equivalent anti-stripping agent), the lime or equivalent shall be added to the asphaltic concrete in the methods specified in the Item unless otherwise approved by the Engineer. If an alternate method is proposed, the Engineer's approval will be based on Test Method Tex-242-F performed on the asphaltic concrete produced through the plant.

Project Number: MMC-644652001

County: SAN SABA

Control: 6446-52-001

Highway: US0190

ITEM 8011 DENSE-GRADED HOT-MIX ASPHALT (SMALL QUANTITY) (MATERIALS ONLY)

Minimum acceptable temperature for Hot-Mix at the delivery location is 215 degrees F.

Delivery costs incurred by the Contractor are subsidiary to this Item.


The use of Recycled Asphalt Shingles (RAS) will not be permitted on this Contract.

Use aggregate that meets the SAC requirement of Class B or better.

Use a Texas Gyrotory Compactor (TGC) to design the mixture.

The Plant is the designated aggregate sampling location unless otherwise approved by the Engineer.

Material deliveries shall be covered with a tarp during transport.

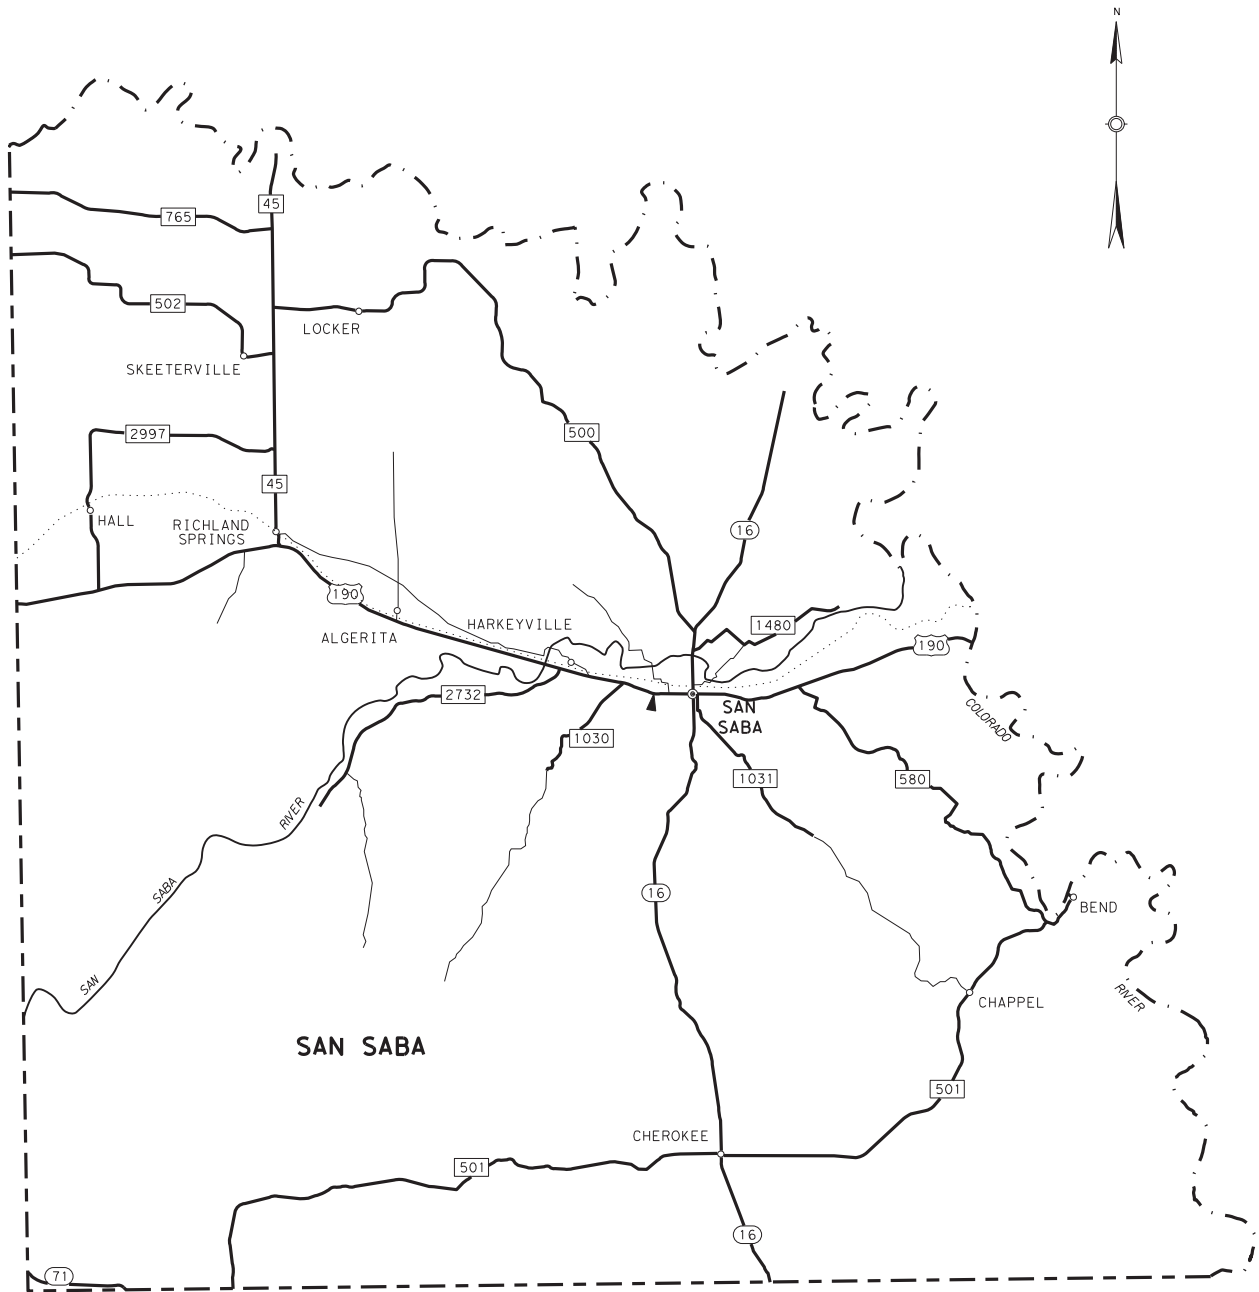

SITE	ITEM	DESCRIPTION	UNIT	QTY
1	8011-6011	D-GR HMA(SQ)TY D PG 64-22 (DLVR) SITE 1	TON	2,000

© 2023  Texas Department of Transportation

FED. RD. DIV. NO.	MAINTENANCE PROJECT NO.		SHEET NO.
6	MMC-644652001		6
STATE	DIST.	COUNTY	
TEXAS	23	SAN SABA	
CONT.	SECT.	JOB	HIGHWAY NO.
6446	52	001	US 190