STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC - 645159001
CSJ 6451-59-001
HIGHWAY: SH0016
DELIVERY LOCATION(S): COMANCHE COUNTY

FOR PURCHASE AND DELIVERY OF MATERIALS ONLY:

HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY), & ASPHALTIC CONCRETE PATCHING MATERIAL (STOCKPILE STORAGE OR BAGGED) (MATERIALS ONLY)

Submitted for Letting:	7/21/2023	Approved for Letting:	7/21/2023	
	Date		Date	
	DocuSigned by:		— DocuSigned by: Blake Stembridge	
Co		Maint	— A2E1607EC542461 — Eenance Engineer	

INDEX OF SHEETS

- 1 TITLE SHEET
- 2-4 GENERAL NOTES
- 5 ESTIMATE & QUANTITY SHEET
- 6 STOCKPILE LOCATION MAP

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.



©2023

FED.RD. SHEET NO. PROJECT NO. DIV.NO. MMC - 645159001 # DISTRICT COUNTY STATE BWD COMANCHE TEXAS CONTROL SECTION JOB HWY NO. 6451 001 SH0016 **FILENAME** DATE MMC - 645159001 07/21/23

Project Number: MMC-645159001

County: COMANCHE Control: 6451-59-001

Highway: SH0016

GENERAL NOTES

<u>This project is for Comanche County only. Delivery location Site 1 can be anywhere in Comanche County.</u>

The Engineer will specify the number of WORKING DAYS granted for each WORK ORDER based on appropriate production and delivery rates.

The Engineer will notify the Contractor by email no later than 5:00PM the day before to cancel a delivery by the Contractor, along with a revised WORK ORDER reflecting this change.

Each Contract awarded by the Department stands on its own and as such, is separate from other Contracts. A Contractor awarded multiple Contracts, must be capable and sufficiently staffed to concurrently process any or all Contracts at the same time.

Contractor questions on this project are to be addressed to the following individual(s):

Name Email Address

Blake Stembridge, P.E. blake.stembridge@txdot.gov

Questions may be submitted via the Letting Pre-Bid Q&A webpage. This webpage can be accessed from the Notice to Contractors dashboard located at the following address:

https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A webpage.

The Letting Pre-Bid Q&A webpage for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hoover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

SECTION 10.2 - INSTRUCTIONS TO BIDDERS

This project includes plan sheets that are not part of the bid proposal. View or download plans at: https://www.txdot.gov/business/letting-bids/plans-online.html

General Notes Sheet A

Project Number: MMC-645159001

County: COMANCHE Control: 6451-59-001

Highway: SH0016

SECTION 10.4 – SCOPE OF WORK

This Contract requires the Contractor to provide Materials in accordance with ITEM 8013 HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT) (MATERIALS ONLY) and ITEM 8019 ASPHALTIC CONCRETE PATCHING MATERIAL (STOCKPILE STORAGE OR BAGGED) (MATERIALS ONLY) by the following method:

1. Delivered by the Contractor to a designated location as defined in each WORK ORDER issued by TxDOT or the assigned representative.

In accordance with Article 10.4.3.1, this contract may be extended twice not to exceed 540 Calendar Days for the entire contract term if mutually agreed.

SECTION 10.8 – PROSECUTION AND PROGRESS

Section 10.8.2, Contract Term will be 6 months (180 Calendar Days). Calendar Days will be charged in accordance with Article 10.8.2., "Contract Term".

Section 10.8.3., Work Orders issued will specify the following:

- 1. The type and quantity of material to be delivered and/or picked-up each day,
- 2. The Contractor's delivery location(s),
- 3. The number of WORKING DAYS needed in order to complete the WORK ORDER,
- 4. The type of haul vehicle the Contractor shall use in the delivery.

The Contractor shall have the capability to deliver material using belly dumps, super dumps/end dumps, or flow boys/live bottoms, as haul vehicles.

Contractor deliveries and TxDOT pickups will typically occur between the hours of 7:00AM and 3:30 PM CST. Prior arrangements shall be made with the Engineer if deliveries or pickups are outside these hours.

Contractor's driver shall report to the Engineer or representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time on the haul ticket, which will include the **WORK ORDER** number.

ITEM 301 ASPHALT ANTISTRIPPING AGENT

When the Contractor adds lime as an anti-stripping agent (or an equivalent anti-stripping agent), the lime or equivalent shall be added to the asphaltic concrete in the methods specified in the Item unless otherwise approved by the Engineer. If an alternate method is proposed, the Engineer's approval will be based on Test Method Tex-242-F performed on the asphaltic concrete produced through the plant.

Project Number: MMC-645159001

County: COMANCHE Control: 6451-59-001

Highway: SH0016

ITEM 8013 HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY)

Delivery costs incurred by the Contractor are subsidiary to this Item.

Use aggregate that meets the SAC requirement of Class B or better.

Asphalt shall be AC-0.6 unless otherwise approved by the Engineer.

The Plant is the designated aggregate sampling location, unless otherwise approved by the Engineer.

Material deliveries shall be covered by a tarp during transport.


ITEM 8019 ASPHALTIC CONCRETE PATCHING MATERIAL (STOCKPILE STORAGE OR BAGGED) (MATERIALS ONLY)

Minimum daily order quantity shall be one truckload.

The Plant is the designated sampling location, unless otherwise approved by the Engineer.

Material deliveries shall be covered by a tarp during transport.

	ESTIMATE SUMMARY						
ITEM- CODE			DESCRIPTION	U N	TOTAL		
ITEM	DESC	SP		T EST.		FINAL	
NO 8013	CODE 6003	NO 000	HMCL ACP TYPE B (DELIVERY) (SITE 1)	TON	2,500.000	1110/12	
8019	6023	000	ASPH CONC PAT MAT(ASPPM) (DEL) (SITE 1)	TON	75.000		
	ESTIMATE & QUANTITY SHEET						
STA	TE DIST.	NO.	COUNTY	PR	OJECT NO.	SHEET NO.	
23			COMANCHE	MM	C-645159001	5	

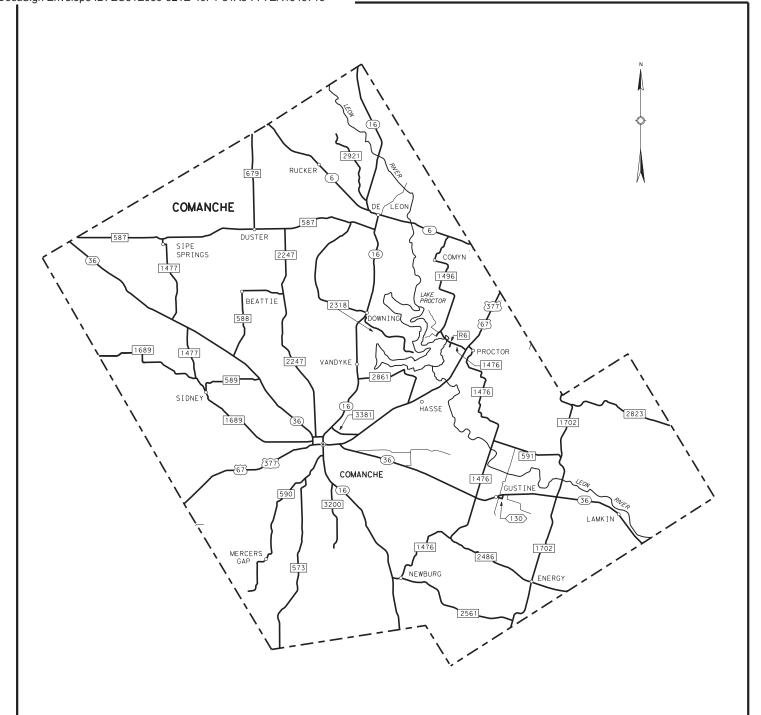

SITE	ITEM	DESCRIPTION		QTY
1	8013-6003	HMCL ACP TYPE B (DELIVERY)(SITE 1)	TON	2,500
1	8019-6023	ASPH CONC PAT MAT (ASPPM)(DEL)(SITE 1)	TON	75

* NOTE: SITE 1 DELIVERY LOCATON CAN BE ANYWHERE IN COMANCHE COUNTY.



	FED.RD. DIV.NO.	MAINTENANCE PROJECT NO.			SHEET NO.
	6	MMC - 645159001			6
Г	STATE	DIST.	COUNTY		
Г	TEXAS	23	COMANCHE		
	CONT.	SECT.	JOB	HIGHWAY NO.	
	6451	59	001	SH	0016