





STATE OF TEXAS TEXAS DEPARTMENT OF TRANSPORTATION

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1.	TITLE SHEET
2.	GENERAL NOTES
3.	ESTIMATE AND QUANTITY SHEET

WORK CONSISTING OF HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT DELIVERY (MATERIALS ONLY)

PROJECT NO: MMC 6451-43-001
COUNTY: DEWITT

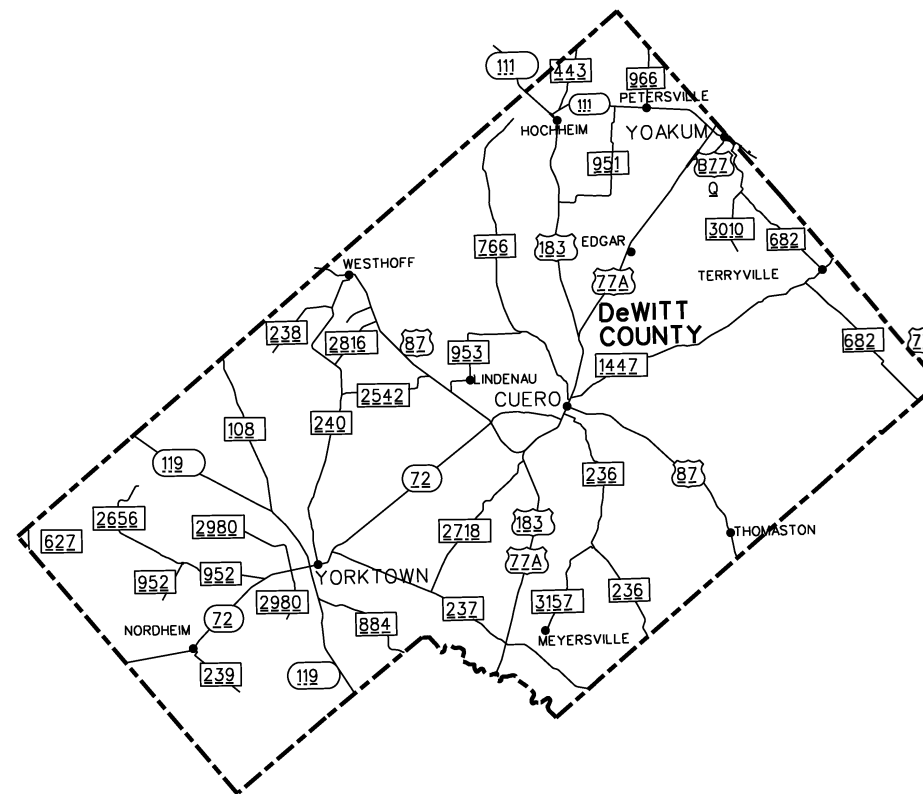

APPROVED FOR LETTING: 08 - 02 23
20

Michael Brzozowski PE
DIRECTOR OF OPERATIONS

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

Mark C. Netardus P.E. 7-27-23
MAINTENANCE ENGINEER DATE

DEWITT COUNTY
YOAKUM DISTRICT

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSING: NONE

TITLE SHEET

Texas Department of Transportation
© 2023 BY TEXAS DEPARTMENT OF TRANSPORTATION
ALL RIGHTS RESERVED

FED. RD. DIV. NO.		PROJECT NO.	
6		6451-43-001	
CONT.	SECT.	JOB	HIGHWAY NO.
			US 183
STATE	DIST.	COUNTY	SHEET NO.
TEXAS	YKM	DEWITT	1

Project Number: MMC 6451-43-001

County: DEWITT COUNTY

GENERAL NOTES:

This is a contract for supplying material on an as needed basis.

Bid price should include furnishing material and delivery anywhere within the county.

Each contract awarded by the Department stands on its own as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Contractor questions on this project are to be addressed to the following individual(s):

Mark Netardus Mark.Netardus@txdot.gov
Michael Brzozowski Michael.Brzozowski@txdot.gov

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:
<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

The Maintenance Supervisor for DeWitt County is Robert Herman @ 361-275-4089.
Email address for Robert is: B.Herman@txdot.gov

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

SECTION 10.4 – SCOPE OF WORK

Prior to beginning operations, the Department will arrange a coordination call between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the Contract, proposed procedures, and plans for performing the work while providing safe passage for traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

Project Number: MMC 6451-43-001

County: DEWITT COUNTY

In accordance with Article 10.4.3.1, this contract may be extended once not to exceed 360 calendar days for the entire contract term if mutually agreed.

**ITEM 8013: HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT
(MATERIALS ONLY)**

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered to the Maintenance yard or the roadway.

The contractor is responsible for furnishing and delivering the hot-mix cold-laid asphalt concrete pavement to the DeWitt Maintenance Yard. The delivery hours will be Monday through Thursday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

Deliver Hot Mix Cold Laid to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.

There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6451-43-001

DISTRICT Yoakum

COUNTY De Witt

HIGHWAY US0183

CONTROL SECTION JOB				6451-43-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00201825			
COUNTY				De Witt			
HIGHWAY				US0183			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8013-6002	HMCL ACP TYPE D SAC-B AC-0.6 (DELIVERY)	TON	3,000.000		3,000.000	
	8013-6003	HMCL ACP TYPE B (DELIVERY)(SITE 1)	TON	250.000		250.000	