

FINAL PLANS

NAME OF CONTRACTOR: _____
 DATE OF LETTING: _____
 DATE WORK BEGAN: _____
 DATE WORK COMPLETED: _____
 DATE WORK ACCEPTED: _____
 SUMMARY OF CHANGE ORDERS:

STATE OF TEXAS
 DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
 STATE HIGHWAY IMPROVEMENT

FEDERAL AID PROJECT
 BR 2022(639)
 CSJ: 0568-01-059

SH 34
 ELLIS COUNTY

LIMITS: AT BARDWELL RESERVOIR


DESIGN MLR	FED. RD. DIV. NO. 6	FEDERAL PROJECT NO. BR 2022(639)	HIGHWAY NO. SH 34
GRAPHICS MLR	STATE	DISTRICT DAL	COUNTY ELLIS
CHECK MK	CONTROL	SECTION 01	JOB 059
CHECK JP	0568	01	059

DESIGN SPEED = 50 MPH
 ADT = 5,400 (2022)
 7,400 (2042)
 FUNCTIONAL CLASS: RURAL MINOR ARTERIAL

NOTE:
 SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION,
 NOVEMBER 1, 2014, AND THE CONTRACT PROVISIONS LISTED AND DATED AS
 FOLLOWS SHALL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS
 FOR ALL FEDERAL-AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, MAY 1,
 2012)

TOTAL LENGTH OF PROJECT = ROADWAY = 0.00 FT. = 0.000 MI.
 BRIDGE = 5,240.00 FT. = 0.992 MI.
 TOTAL = 5,240.00 FT. = 0.992 MI.

FOR THE CONSTRUCTION OF: BRIDGE MAINTENANCE
 CONSISTING OF: BRIDGE MAINTENANCE

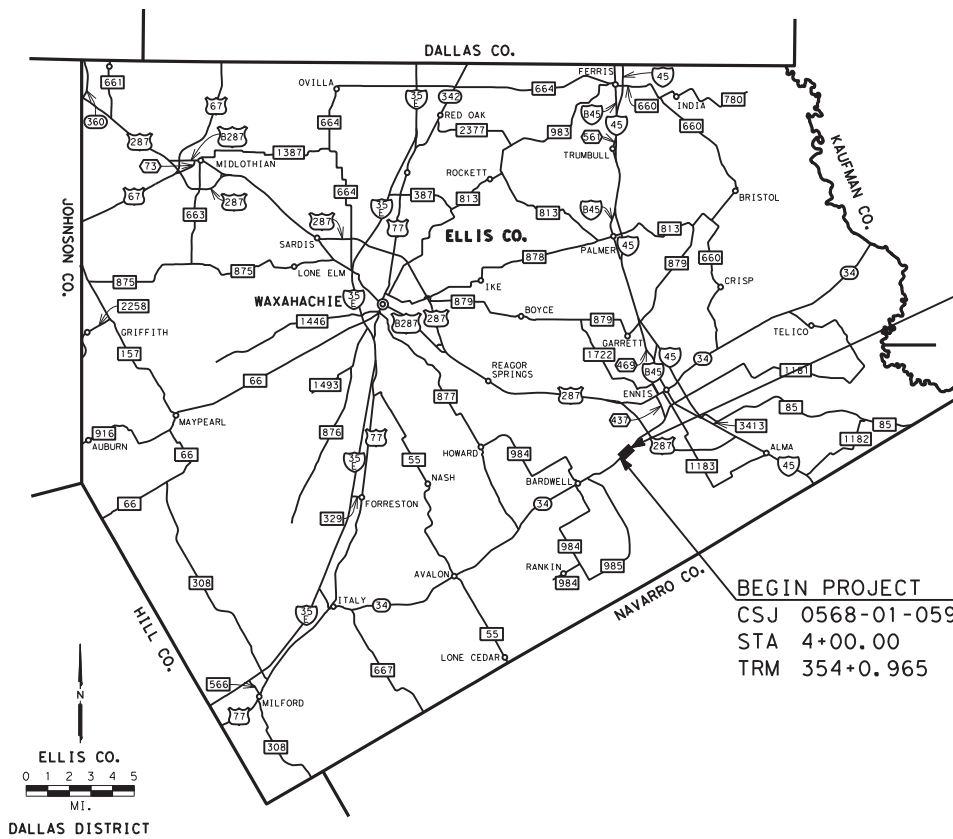

END PROJECT
 CSJ 0568-01-059
 STA 56+40.00
 TRM 354+1.935

BEGIN PROJECT
 CSJ 0568-01-059
 STA 4+00.00
 TRM 354+0.965

EQUATIONS: NONE
 EXCEPTIONS: NONE
 RAILROAD CROSSINGS: NONE

WORK WAS COMPLETED ACCORDING
 TO THE PLANS AND CONTRACT.

_____, P.E.
 Signature of Registrant & Date

TEXAS DEPARTMENT OF TRANSPORTATION

SUBMITTED FOR SIGNATURE BY: 4/15/2022
 Amanda McKittrick P.E., P.E.
 DESIGN ENGINEER

RECOMMENDED FOR SIGNATURE BY: 4/15/2022
 [Signature], P.E.
 DIRECTOR OF TRANSPORTATION
 PLANNING & DEVELOPMENT


RECOMMENDED FOR SIGNATURE BY: 4/15/2022
 Juan A. Paredes, P.E., P.E.
 DESIGN ENGINEER

APPROVED FOR SIGNATURE BY: 4/15/2022
 [Signature], P.E.
 DISTRICT ENGINEER

SHEET NO.	DESCRIPTION
GENERAL	
1	TITLE SHEET
2	INDEX OF SHEETS
3	TYPICAL SECTIONS
4, 4A-4B	GENERAL NOTES
5, 5A	ESTIMATE & QUANTITY
6-10	SUMMARY OF QUANTITIES
TRAFFIC CONTROL PLAN	
11	TRAFFIC CONTROL PLAN - NARRATIVE
12	TRAFFIC CONTROL PLAN - TYPICAL SECTION
TRAFFIC CONTROL PLAN STANDARDS	
*13-24	BC (1)-21 THRU BC (12)-21
*25	TCP (1-2)-18
*26	TCP (3-1)-13
*27	TCP (3-3)-14
*28	WZ(RS)-22
ROADWAY DETAILS	
NONE	
ROADWAY DETAILS STANDARDS	
*29	ABSORB (M) -19
*30	CCCG-21
*31-32	CSB (1) -10
*33	GF (31) -19
*34	GF (31)MS-19
*35-36	GF (31) TR TL3-20
*37	SGT (10S) 31-16
*38	SGT (11S) 31-18
*39	SGT (12S) 31-18
*40	SGT (15) 31-20
*41	SLED-19

SHEET NO.	DESCRIPTION
DRAINAGE DETAILS	
NONE	
BRIDGE	
42	NE APPROACH SLAB REPAIR DETAILS
43	SW APPROACH SLAB REPAIR DETAILS
44	CONCRETE AND OVERHEAD REPAIR DETAILS
45	COLUMN REPAIR DETAILS
46	JOINT REPAIR DETAILS
BRIDGE STANDARDS	
47	RAIL RETROFIT DETAILS
48-51	TYPE T131RC (MOD)
*52	BAS-A
TRAFFIC SIGNAL	
NONE	
SIGNING	
NONE	
PAVEMENT MARKINGS & DELINEATION	
NONE	
PAVEMENT MARKINGS & DELINEATION STANDARDS	
*53-58	D&OM (1)-20 THRU D&OM (6)-20
*59	D&OM (VIA)-20
*60-61	PM (1)-20 THRU PM (2)-20
ENVIRONMENTAL ISSUES	
62	STORMWATER POLLUTION PREVENTION PLAN (SW3P) (DAL)
63	ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS (EPIC) (DAL)
ENVIRONMENTAL ISSUES STANDARDS	
*64	EC (3)-16
*65-67	EC (9)-16


SHEET NO.	DESCRIPTION
MISCELLANEOUS ITEMS	
NONE	
RAILROAD REQUIREMENTS	
NONE	



* STATEWIDE STANDARDS
 ** DALLAS DISTRICT STANDARDS


THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

Amanda McKittrick, P.E., P.E. 4/15/2022
 Signature of Registrant & Date




INDEX OF SHEETS				
DESIGN	FED. RD. DIV. NO.	FEDERAL PROJECT NO.	HWY NO.	
GRAPHICS	6	SEE TITLE SHEET	SH 34	
CHECK	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	DAL	ELLIS	
CHECK	CONTROL	SECTION	JOB	2
	0568	01	059	

DATE: 4/12/2022 TIME: 3:13:32 PM
 FILE: pw:\t\tdot\projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Pion Set\1. General\Typical Sections 1.dgn

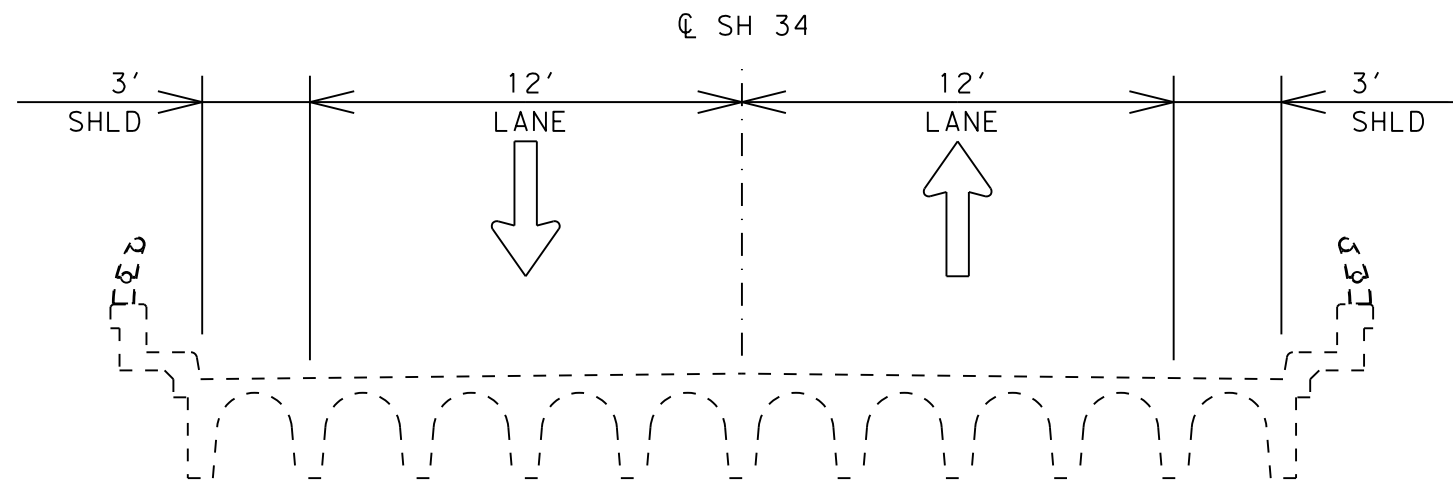


EXISTING TYPICAL SECTION

STA. 4+00.00 TO STA. 56+40.00

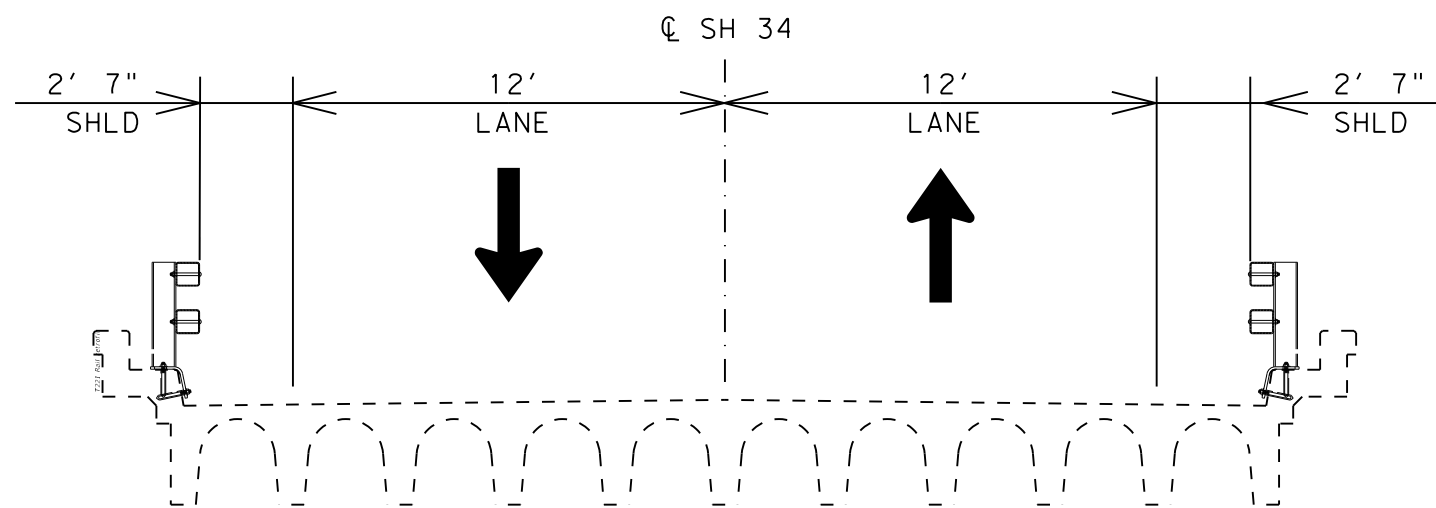

PROPOSED TYPICAL SECTION

STA. 4+00.00 TO STA. 56+40.00



Juan A. Paredes, P.E. 4/15/2022
 Signature of Registrant & Date



TYPICAL SECTIONS

DESIGN	FED. RD. DIV. NO.	PROJECT NO.			HIGHWAY NO.
JAP	6	SEE TITLE SHEET			SH 34
GRAPHICS		STATE	DISTRICT	COUNTY	SHEET NO.
JAP		TEXAS	DAL	ELLIS	3
CHECK		CONTROL	SECTION	JOB	
MJK		0568	01	059	

County: Ellis

Highway: SH 34

GENERAL

The construction, operation and maintenance of the proposed project will be consistent with the state implementation plan as prepared by the Texas Commission on Environmental Quality.

The disturbed area for this project, as shown on the plans is 0 acres. However, the Total Disturbed Area (TDA) will establish the required authorization for storm water discharges. The TDA of this project will be determined by the sum of the disturbed area in all project locations in the contract, and all disturbed area on all Project-Specific Locations (PSL) located in the project limits and/or within 1 mile of the project limits. The department will obtain an authorization to discharge storm water from the Texas Commission on Environmental Quality (TCEQ) for the construction site as shown on the plans, according to the TDA of the project. The contractor will obtain any required authorization from the TCEQ for the discharge of storm water from any PSL for construction support activities on or off of the project row according to the TDA of the project. When the TDA for the project exceeds 1 acre, provide a copy of the appropriate application of permit (NOI, or Construction Site Notice) to the engineer, for any PSL located in the project limits or within 1 mile of the project limits. Follow the directives and adhere to all requirements set forth in the TCEQ, Texas Pollution Discharge Elimination System, Construction General Permit (TPDES, CGP).

This project does not require formal consultation or permitting with environmental resources agencies. There is a high probability that an environmentally sensitive area could be encountered on the contractor designated Project-Specific Locations (PSL) for this project (haul roads, equipment staging areas, borrow pits, disposal sites, field offices, storage areas, parking areas, etc.). Item 7.6 "Project-Specific Locations", provides a listing of regulatory agencies that may need to be contacted regarding this project.

Leave all right of way areas undisturbed until actual construction is to be performed in said areas.

Contractor questions on this project are to be addressed to the following individual(s):

Juan Paredes Juan.Paredes@txdot.gov
Amanda McKittrick Amanda.McKittrick@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:
<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

The following standard detail sheets have been modified: *TYPE T131RC (MOD)*

County: Ellis

Highway: SH 34

Item 5:

Underground utilities owned by the Texas Department of Transportation may be present within the Right-Of-Way on this project. For signal, illumination, surveillance, and communications & control maintained by TxDOT, call the TxDOT Traffic Signal Office (214-320-6682) for locates a minimum of 48 hours in advance of excavation. For irrigation systems, call TxDOT Landscape Office (214-320-6205) for locates a minimum of 48 hours in advance of excavation. If city or town owned irrigation facilities are present, call the appropriate department of the local city or town a minimum of 48 hours in advance of excavation. The Contractor is liable for all damages when utilities are damaged due to Contractor's negligence including, but not limited to, repair or replacement at the Contractor's expense.

For the project to be deemed complete, permanently stabilize all unpaved disturbed areas of the project with a vegetative cover at a minimum of 70% density for the control of erosion.

Place construction stakes/station markings at intervals of no more than 100 feet or as directed by the Engineer. Place stakes and markings so as not to interfere with normal construction operations.

Submit all shop drawings, working drawings, or other documents which require review sufficiently in advance of scheduled construction to allow no less than thirty (30) calendar days for review and response.

Item 7:

Repair or replace any structures and utilities that might have been damaged by negligence or a failure to have utility locates performed.

Holiday restrictions – The Engineer may decide that no lane closures or construction operations shall be allowed during the restricted periods listed in the following holiday schedule. TxDOT has the right to lengthen, shorten, or otherwise modify these restricted periods as actual, or expected, traffic conditions may warrant. Working days will not be charged for these restricted periods. No additional compensation will be allowed for these closures (i.e., overhead, delays, stand-by, barricades or any other associated cost impacts).

- New Year's Eve and Day (5 am on December 31 thru 10:00 pm January 1)
- Easter Holiday weekend (5 am on Friday thru 10:00 pm Sunday)
- Memorial Day weekend (5 am on Friday thru 10:00pm Monday)
- Independence Day (5 am on July 3 thru 10:00 pm on July 5)
- Labor Day weekend (5 am on Friday thru 10:00 pm Monday)
- Thanksgiving Holiday (5 am on Wednesday thru 10:00 pm Sunday)
- Christmas Holiday (5 am on December 23 thru 10:00 pm December 26)

Item 8:

This Project will be a Standard Workweek.

Nighttime work is allowed in accordance with Article 8.3.3.

Meet weekly with the engineer to notify him or her of planned work for the upcoming week.

County: Ellis

Highway: SH 34

Provide the engineer with a daily work schedule of planned work.

Item 104:

In those areas where the pavement is not to be overlaid, provide a smooth surface after the curb removal. Planing or grinding is considered an acceptable method at these locations. Measurement and payment is in accordance with this item.

Sawing of concrete is not paid for directly, but is considered subsidiary to this item.

Item 420:

Apply an ordinary surface finish to all concrete surfaces within 30 days after form removal.

Item 421:

Furnish mix designs to the Engineer in a format compatible to the latest version of the Department's Construction Management System (Site Manager). Mix Design templates will be provided by the Engineer.

Provide High Performance Concrete (HPC) of the class specified for the following bridge components: approach slabs.

Provide High Performance Concrete (HPC) of the class specified for all railing and permanent concrete traffic barrier placed on bridges or approach slabs. HPC concrete is not required for portions of rail or concrete traffic barrier not located on a bridge.

Strength evaluation using maturity testing, Tex-426-A, may be used for all concrete elements except drilled shafts and mass concrete pours.

Item 500:

Material On Hand (MOH) will not be used in calculating partial payments for Mobilization.

Item 502:

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Access will be provided to all business and residences at all times. Where turning radii are limited during phased construction at intersections, provide all weather surfaces such as RAP or base in turning movements to accommodate and to protect the traffic from edge drop-offs. Materials, labor, maintenance and removal for these temporary accesses and radii will not be paid for directly but will be considered subsidiary to the various bid items.

Provide written proposed lane closure information by 1:00 pm on the business day prior to the proposed closures. Do not close lanes when this requirement is not met.

County: Ellis

Highway: SH 34

When excavation is required next to a pavement lane carrying traffic and the widening is not completed by the end of the work day, backfill against the edge of the pavement with at least a 3:1 slope using an acceptable material to support vehicular traffic. Carefully remove and dispose of this material when work resumes. Backfilling pavement edges, and the materials required for the work will be subsidiary to this item.

Place barricades and signs in locations that do not obstruct the sight distance of drivers entering the highway from driveways or side streets.

Do not commence work on the road before sunrise. Do not operate or park any equipment/machinery closer than 30 feet from the traveled roadway after sunset unless authorized by the engineer.

When moving unlicensed equipment on or across any pavement or public highways, protect the pavement from all damage using an acceptable method.

Item 506:

Take all practicable precautions to prevent debris from being discharged into the Waters of Texas or a designated wetland. Install Best Management Practices before demolition begins and maintain them during the demolition. Remove any debris or construction material that escapes containment devices and are discharged into the restricted areas, before the next rain event or within 24 hours of the discharge.

If temporary construction stream crossings are allowed under a Nationwide Permit, submit in writing for approval the type and location of each temporary stream crossing. Use temporary bridges, timber mats, or other structurally sound and non-eroding material for temporary stream crossings. A temporary culvert crossing will consist of storm sewer pipes and 4- to 8-inch nominal size rock. Temporary stream crossings must not cause more than minimal changes to the hydraulic flow characteristics of the stream, increase flooding, or cause more than minimal degradation of water quality. Remove the temporary stream crossings in their entirety and return the affected areas to their pre-existing elevation. All work and materials use for temporary construction stream crossings will not be paid for directly but are subsidiary to pertinent items.

Concrete Washouts are required per the CGP. The Concrete Washout Area(s) structural controls must consist of temporary berms, temporary shallow pits, and/or temporary storage tanks to prevent contaminated runoff and must be lined as to prevent contamination of underlying soil. Ensure pits properly maintained including removal of concrete as not to allow over flow. The location(s) of washout area will be approved by the Engineer. When washout pits are no longer needed, they will be removed and area will be restored to original condition. This work, materials and labor will not be measured or paid for directly but will be subsidiary to Item 506, "Temporary Erosion, Sedimentation, and Environmental Controls."

Item 512:

The contractor will furnish pre-cast F Shape Barriers for traffic control, and remove and retain possession of non-permanent barriers at the end of the project. Pre-cast F Shape Barriers must have drainage slots as detailed on the Concrete Safety Barrier Standards. Submit for approval the type of barrier joint connection proposed for the project.

County: Ellis

Highway: SH 34

Item 529:

Provide grooved joints at 10-foot intervals and 3/4 inch expansion joint material for doweled curb at the same locations as on the existing pavement.

For Curb and Gutter sections, provide grooved joints at 10-foot intervals and 3/4 inch expansion joint material at a maximum of 50-foot centers and at all radius points and inlets.

Curb and Gutter transitions will be paid for by the foot at the unit price for the corresponding curb or curb and gutter section.

Saw joints at the same location as on the existing pavement.

Item 540:

Furnish one type of post throughout the project except as specifically noted in the plans.

Item 677:

A water blasting method approved by the Engineer will be the only method allowed for the removal of permanent and temporary pavement markings except on a sealcoat surface. A 2 foot wide sealcoat will be required on sealcoat surfaces to eliminate permanent and temporary pavement markings.

Item 672:

Black adhesive will be used on asphalt pavements and white adhesive will be used on concrete pavements

Item 6185:

The total number of truck mounted attenuators (TMAs) or trailer attenuators (TAs) required when utilizing the traffic control standards are shown in the tables below.

TCP 1 Series	Scenario	Required TMA/TA
(1-1)-18 / (1-2)-18		1

TCP 2 Series	Scenario	Required TMA/TA
(2-1)-18 / (2-2)-18 / (2-4)-18 / (2-5)-18 / (2-6)-18	All	1

TCP 3 Series	Scenario	Required TMA/TA
(3-1)-13	All	2
(3-3)-14	A B D	2
	C	3

The contractor will be responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMAs/TAs needed for the project.

County: Ellis

Highway: SH 34

Additional TMAs/TAs used that are not specified in the plans in which the contractor expects compensation will require prior approval from the Engineer.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0568-01-059

DISTRICT Dallas
HIGHWAY SH 34

COUNTY Ellis

CONTROL SECTION JOB				0568-01-059		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00183916			
COUNTY				Ellis			
HIGHWAY				SH 34			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	104-6021	REMOVING CONC (CURB)	LF	80.000		80.000	
	104-6054	REMOVING CONCRETE(MOW STRIP)	LF	1,720.000		1,720.000	
	422-6016	APPROACH SLAB (HPC)	CY	48.200		48.200	
	428-6001	PENETRATING CONCRETE SURFACE TREATMENT	SY	17,471.000		17,471.000	
	429-6003	CONC STR REPAIR(DECK REP(PART DEPTH))	SF	165.000		165.000	
	429-6007	CONC STR REPAIR (VERTICAL & OVERHEAD)	SF	1,876.000		1,876.000	
	432-6045	RIPRAP (MOW STRIP)(4 IN)	CY	106.300		106.300	
	438-6004	CLEANING AND SEALING EXIST JOINTS(CL7)	LF	3,960.000		3,960.000	
	451-6004	RETROFIT RAIL (TY T131RC)	LF	10,510.000		10,510.000	
	496-6025	REMOV STR (APPROACH SLAB)	EA	2.000		2.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	10.000		10.000	
	506-6020	CONSTRUCTION EXITS (INSTALL) (TY 1)	SY	115.000		115.000	
	506-6024	CONSTRUCTION EXITS (REMOVE)	SY	115.000		115.000	
	506-6041	BIODEG EROSN CONT LOGS (INSTL) (12")	LF	200.000		200.000	
	506-6043	BIODEG EROSN CONT LOGS (REMOVE)	LF	200.000		200.000	
	512-6005	PORT CTB (FUR & INST)(F-SHAPE)(TY 1)	LF	480.000		480.000	
	512-6053	PORT CTB (REMOVE)(F-SHAPE)(TY 1)	LF	480.000		480.000	
	529-6002	CONC CURB (TY II)	LF	80.000		80.000	
	540-6001	MTL W-BEAM GD FEN (TIM POST)	LF	1,440.000		1,440.000	
	540-6006	MTL BEAM GD FEN TRANS (THRIE-BEAM)	EA	4.000		4.000	
	542-6001	REMOVE METAL BEAM GUARD FENCE	LF	1,440.000		1,440.000	
	542-6002	REMOVE TERMINAL ANCHOR SECTION	EA	4.000		4.000	
	544-6001	GUARDRAIL END TREATMENT (INSTALL)	EA	4.000		4.000	
	545-6005	CRASH CUSH ATTEN (REMOVE)	EA	4.000		4.000	
	545-6019	CRASH CUSH ATTEN (INSTL)(S)(N)(TL3)	EA	4.000		4.000	
	658-6062	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2(BI)	EA	332.000		332.000	
	666-6224	PAVEMENT SEALER 4"	LF	20,960.000		20,960.000	
	666-6342	REF PROF PAV MRK TY I(W)4"(SLD)(100MIL)	LF	10,480.000		10,480.000	
	666-6345	REF PROF PAV MRK TY I(Y)4"(SLD)(100MIL)	LF	10,480.000		10,480.000	
	672-6009	REFL PAV MRKR TY II-A-A	EA	132.000		132.000	
	677-6001	ELIM EXT PAV MRK & MRKS (4")	LF	20,960.000		20,960.000	
	678-6001	PAV SURF PREP FOR MRK (4")	LF	20,960.000		20,960.000	
	780-6002	CNC CRACK REPAIR (DISCRETE)(INJECT)	LF	2.500		2.500	
	786-6001	CARBON FIBER REINF POLYMER PROTECTION	SF	320.000		320.000	
	6001-6002	PORTABLE CHANGEABLE MESSAGE SIGN	EA	2.000		2.000	
	6185-6002	TMA (STATIONARY)	DAY	80.000		80.000	



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0568-01-059


DISTRICT Dallas
HIGHWAY SH 34

COUNTY Ellis

CONTROL SECTION JOB				0568-01-059		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00183916			
COUNTY				Ellis			
HIGHWAY				SH 34			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	6185-6005	TMA (MOBILE OPERATION)	DAY	12.000		12.000	
	08	CONTRACTOR FORCE ACCOUNT EROSION CONTROL MAINTENANCE (NON-PARTICIPATING)	LS	1.000		1.000	
		CONTRACTOR FORCE ACCOUNT LAW ENFORCEMENT (NON-PARTICIPATING)	LS	1.000		1.000	
		CONTRACTOR FORCE ACCOUNT SAFETY CONTINGENCY (NON-PARTICIPATING)	LS	1.000		1.000	

DATE: 4/19/2022 TIME: 8:06:51 AM FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Details_2_Rail Retrofit\100% Submission\04-18-2022\Cover & Qty.dwg: dalbrdg

Location	422-6016	428-6001	429-6003	429-6007	438-6004	451-6004	496-6025	780-6002	786-6001
	APPROACH SLAB (HPC)	PENETRATING CONCRETE SURFACE TREATMENT	CONC STR REPAIR(DECK REP(PART DEPTH))	CONC STR REPAIR (VERTICAL & OVERHEAD)	CLEANING AND SEALING EXIST JOINTS (CL7)	RETROFIT RAIL (TY T131RC)	REMOV STR (APPROACH SLAB)	CNC CRACK REPAIR (DISCRETE) (INJECT)	CARBON FIBER REINF POLYMER PROTECTION
	CY	SF	SF	SF	LF	LF	EA	LF	SF
NE Approach	23.1					13.5	1		
Abut. 1				25	30				
Span 1		133.3				80			
Bent 2				10	30				
Span 2		133.3				80			
Bent 3				15	30				
Span 3		133.3				80			
Bent 4				18	30				
Span 4		133.3				80			
Bent 5				12	30				
Span 5		133.3				80			
Bent 6				10	30				
Span 6		133.3				80			
Bent 7				6	30				
Span 7		133.3				80			
Bent 8				15	30				
Span 8		133.3				80			
Bent 9				0	30				
Span 9		133.3				80			
Bent 10				15	30				
Span 10		133.3	15			80			
Bent 11				45	30				
Span 11		133.3	15			80			
Bent 12				10	30				
Span 12		133.3				80			
Bent 13				14	30				
Span 13		133.3				80			
Bent 14				10	30				
Span 14		133.3				80			
Bent 15				15	30				
Span 15		133.3				80			
Bent 16				40	30				
Span 16		133.3				80			
Bent 17				10	30				78.5
Span 17		133.3				80			
Bent 18				10	30				
Span 18		133.3				80			
Bent 19				10	30				
Span 19		133.3				80			
Bent 20				15	30				
Span 20		133.3				80			
Bent 21				40	30				
Span 21		133.3				80			
Bent 22				12	30				
Span 22		133.3	10			80			
Bent 23				15	30				
Span 23		133.3				80			
Bent 24				10	30				
Span 24		133.3				80			
Bent 25				25	30				
Span 25		133.3				80			
Bent 26				15	30			2.5*	
Span 26		133.3				80			
Bent 27				40	30				
Span 27		133.3				80			
Bent 28				10	30				
Span 28		133.3				80			
Bent 29				15	30				
Span 29		133.3	15			80			
Bent 30				8	30				
Span 30		133.3				80			
Bent 31				10	30				
Span 31		133.3				80			
Bent 32				15	30				
Span 32		133.3				80			
Bent 33				15	30				
Span 33		133.3				80			
Bent 34				40	30				
Span 34		133.3				80			
Bent 35				10	30				
Span 35		133.3				80			
Bent 36				16	30				
Span 36		133.3				80			
Bent 37				10	30				
Span 37		133.3				80			
Bent 38				26	30				
Span 38		133.3				80			
Bent 39				10	30				
Span 39		133.3				80			
Bent 40				10	30				
Span 40		133.3	10			80			
Bent 41				30	30				24
Span 41		133.3				80			
Bent 42				5	30				
Span 42		133.3				80			
Bent 43				10	30				
Span 43		133.3				80			



Rajasegaram Ranjith

04/19/2022

1 of 5

Dallas District Bridge

SH 34

BARDWELL RESERVOIR REPAIR LOCATION 1

FILE: SEE PATH	DN: RR	CK: RM	DW: RR	CK: RM
CONT: 0568	SECT: 01	JOB: 059	HIGHWAY: SH 34	
DIST: DAL		COUNTY: ELLIS	SHEET NO: 6	

* Shear crack is on the outside face of the exterior girder at the support on Bent 27

DATE: 4/19/2022 TIME: 8:07:06 AM FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Details_2_Rail Retrofit\100% Submission\04-18-2022\Cover & Qty.dwgger: dalbrdg

Location	422-6016	428-6001	429-6003	429-6007	438-6004	451-6004	496-6025	780-6002	786-6001
	APPROACH SLAB (HPC) CY	PENETRATING CONCRETE SURFACE TREATMENT SY	CONC STR REPAIR(DECK REP(PART DEPTH)) SF	CONC STR REPAIR (VERTICAL & OVERHEAD) SF	CLEANING AND SEALING EXIST JOINTS (CL7) LF	RETROFIT RAIL (TY T131RC) LF	REMOV STR (APPROACH SLAB) EA	CNC CRACK REPAIR (DISCRETE) (INJECT) LF	CARBON FIBER REINF POLYMER PROTECTION SF
Bent 44				50	30				
Span 44		133.3				80			
Bent 45				5	30				
Span 45		133.3				80			
Bent 46				5	30				
Span 46		133.3				80			
Bent 47				10	30				
Span 47		133.3				80			
Bent 48				10	30				
Span 48		133.3	15			80			
Bent 49				20	30				
Span 49		133.3				80			
Bent 50				10	30				
Span 50		133.3				80			
Bent 51				10	30				
Span 51		133.3	10			80			
Bent 52				12	30				
Span 52		133.3				80			
Bent 53				15	30				
Span 53		133.3				80			
Bent 54				15	30				
Span 54		133.3				80			
Bent 55				6	30				
Span 55		133.3				80			
Bent 56				10	30				
Span 56		133.3	10			80			
Bent 57				10	30				
Span 57		133.3				80			
Bent 58				8	30				
Span 58		133.3				80			
Bent 59				35	30				78.5
Span 59		133.3				80			
Bent 60				10	30				
Span 60		133.3	10			80			
Bent 61				6	30				
Span 61		133.3				80			
Bent 62				5	30				39.5
Span 62		133.3				80			
Bent 63				2	30				
Span 63		133.3				80			
Bent 64				15	30				
Span 64		133.3				80			
Bent 65				5	30				
Span 65		133.3				80			
Bent 66				15	30				
Span 66		133.3				80			
Bent 67				10	30				
Span 67		133.3	10			80			
Bent 68				20	30				
Span 68		133.3				80			
Bent 69				40	30				
Span 69		133.3				80			
Bent 70				5	30				
Span 70		133.3				80			
Bent 71				10	30				
Span 71		133.3				80			
Bent 72				10	30				
Span 72		133.3				80			
Bent 73				10	30				
Span 73		133.3				80			
Bent 74				10	30				
Span 74		133.3				80			
Bent 75				5	30				
Span 75		133.3				80			
Bent 76				10	30				
Span 76		133.3				80			
Bent 77				12	30				
Span 77		133.3				80			
Bent 78				0	30				
Span 78		133.3				80			
Bent 79				30	30				
Span 79		133.3				80			
Bent 80				10	30				
Span 80		133.3	15			80			




04/19/2022

2 of 5

		Dallas District Bridge	
<h1>SH 34</h1> <h2>BARDWELL RESERVOIR REPAIR LOCATION 2</h2>			
FILE: SEE PATH	DN: RR	CK: RM	DW: RR
CONT: 2022	SECT: 01	JOB: 059	HIGHWAY: SH 34
DIST: DAL	COUNTY: ELLIS	SHEET NO: 7	

DATE: 4/19/2022 TIME: 8:07:20 AM FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Details_2_Rail Retrofit\100% Submission\04-18-2022\Cover & Qty.dwgger: dalbrdg

Location	422-6016	428-6001	429-6003	429-6007	438-6004	451-6004	496-6025	780-6002	786-6001
	APPROACH SLAB (HPC) CY	PENETRATING CONCRETE SURFACE TREATMENT SY	CONC STR REPAIR(DECK REP(PART DEPTH)) SF	CONC STR REPAIR (VERTICAL & OVERHEAD) SF	CLEANING AND SEALING EXIST JOINTS (CL7) LF	RETROFIT RAIL (TY T131RC) LF	REMOV STR (APPROACH SLAB) EA	CNC CRACK REPAIR (DISCRETE) (INJECT) LF	CARBON FIBER REINF POLYMER PROTECTION SF
Bent 81				15	30				24
Span 81		133.3				80			
Bent 82				15	30				
Span 82		133.3				80			
Bent 83				35	30				
Span 83		133.3				80			
Bent 84				25	30				
Span 84		133.3				80			
Bent 85				0	30				
Span 85		133.3				80			
Bent 86				4	30				
Span 86		133.3				80			
Bent 87				6	30				
Span 86		133.3				80			
Bent 88				10	30				
Span 88		133.3				80			
Bent 89				75	30				
Span 89		133.3				80			
Bent 90				6	30				
Span 90		133.3				80			
Bent 91				10	30				
Span 91		133.3				80			
Bent 92				35	30				31.5
Span 92		133.3				80			
Bent 93				5	30				
Span 93		133.3				80			
Bent 94				5	30				
Span 94		133.3				80			
Bent 95				35	30				
Span 95		133.3				80			
Bent 96				10	30				
Span 96		133.3				80			
Bent 97				5	30				
Span 97		133.3				80			
Bent 98				5	30				
Span 98		133.3				80			
Bent 99				10	30				
Span 99		133.3				80			
Bent 100				5	30				
Span 100		133.3				80			
Bent 101				5	30				
Span 101		133.3				80			
Bent 102				8	30				
Span 102		133.3				80			
Bent 103				6	30				
Span 103		133.3				80			
Bent 104				10	30				
Span 104		133.3				80			
Bent 105				10	30				
Span 105		133.3				80			
Bent 106				0	30				
Span 106		133.3				80			
Bent 107				12	30				
Span 107		133.3				80			
Bent 108				15	30				
Span 108		133.3				80			
Bent 109				15	30				
Span 109		133.3	10			80			
Bent 110				12	30				
Span 110		133.3				80			
Bent 111				10	30				
Span 111		133.3				80			
Bent 112				5	30				24
Span 112		133.3				80			
Bent 113				25	30				
Span 113		133.3				80			
Bent 114				15	30				
Span 114		133.3				80			
Bent 115				5	30				
Span 115		133.3				80			
Bent 116				5	30				
Span 116		133.3				80			
Bent 117				15	30				
Span 117		133.3	10			80			
Bent 118				12	30				
Span 118		133.3				80			
Bent 119				25	30				
Span 119		133.3				80			
Bent 120				15	30				
Span 120		133.3				80			

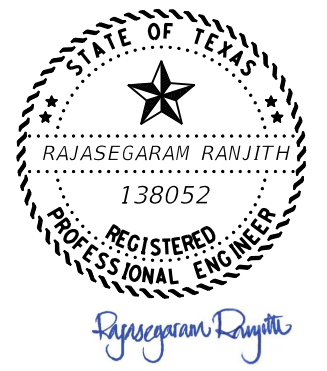

04/19/2022

3 of 5


		Dallas District Bridge	
<h2>SH 34</h2> <h3>BARDWELL RESERVOIR REPAIR LOCATION 3</h3>			
FILE: SEE PATH	DN: RR	CK: RM	DW: RR
CONT: 2022	SECT: 0568	JOB: 01	HIGHWAY: SH 34
DIST: DAL	COUNTY: ELLIS	SHEET NO. 8	

FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Details_2_Rail Retrofit\100% Submission\04-18-2022\Cover & Qty.dwg; dalbrdg DATE: 4/19/2022 TIME: 8:07:33 AM

Location	422-6016	428-6001	429-6003	429-6007	438-6004	451-6004	496-6025	780-6002	786-6001
	APPROACH SLAB (HPC)	PENETRATING CONCRETE SURFACE TREATMENT	CONC STR REPAIR(DECK REP(PART DEPTH))	CONC STR REPAIR (VERTICAL & OVERHEAD)	CLEANING AND SEALING EXIST JOINTS (CL7)	RETROFIT RAIL (TY T131RC)	REMOV STR (APPROACH SLAB)	CNC CRACK REPAIR (DISCRETE) (INJECT)	CARBON FIBER REINF POLYMER PROTECTION
	CY	SY	SF	SF	LF	LF	EA	LF	SF
Bent 121				5	30				
Span 121		133.3				80			
Bent 122				10	30				
Span 122		133.3	10			80			
Bent 123				20	30				
Span 123		133.3				80			
Bent 124				25	30				
Span 124		133.3				80			
Bent 125				10	30				
Span 125		133.3				80			
Bent 126				10	30				
Span 126		133.9				80.3			
Bent 127				12	30				20
Span 127		134.1				80.4			
Bent 128				10	30				
Span 128		134.1				80.4			
Bent 129				0	30				
Span 129		134.1				80.4			
Bent 130				10	30				
Span 130		134.1				80.4			
Bent 131				10	30				
Span 131		134.1				80.4			
Abutt 132				40	30				
SW Approach	25.1					13.5	1		

Location	104-6021	104-6054	432-6045	506-6020	506-6024	506-6041	506-6043	512-6005	512-6053	529-6002	540-6001	540-6006	542-6001	542-6002
	REMOVING CONC (CURB)	REMOVING CONC (MOW STRIP)	R)PRAP (MOW STRIP) (4 IN)	CONSTRUCTION EXITS (INSTALL) (TY 1)	CONSTRUCTION EXITS (REMOVE)	BIODEG EROSN CONT LOGS (INSTALL) (12")	BIODEG EROSN CONT LOGS (REMOVE)	PORT CTB (FUR & INST)(F-SHAPE)(TY 1)	PORT CTB (REMOVE)(F-SHAPE)(TY 1)	CONC CURB (TY II)	MTL W-BEAM GD FEN (TIM POST)	MTL BEAM GD FEN TRANS (THRIE-BEAM)	REMOVE METAL BEAM GUARD FENCE	REMOVE TERMINAL ANCHOR SECTION
	LF	LF	CY	LF	SY	LF	LF	LF	LF	LF	LF	EA	LF	EA
PROJECT LIMITS	80	1720	106.3	115	115	200	200	400	400	00	1440	4	1440	4
PROJECT TOTALS	80	1720	106.3	115	115	200	200	400	400	00	1440	4	1440	4

Location	544-6001	545-6005	545-6019	608-6062	666-6224	666-6342	666-6345	672-6009	677-6001	678-6001	6001-6002	6185-6002	6185-6005
	GUARDRAIL END TREATMENT (INSTALL)	CRASH CUSH ATTEN (REMOVE)	CRASH CUSH ATTEN (INSTL) (ST) (N) (TL3)	(INSTL DEL ASSM (D-SW) SZ1 (BRF) (GF2) (BI)	PAVEMENT SEALER 4"	REF PROF PAV MKR TY I (W) 4" (SLD) (100MIL)	REF PROF PAV MKR TY I (Y) 4" (SLD) (100MIL)	REFL PAV MKR TY II-A-A	ELIM EXT PAV MKR & MKRS (4")	PAV SURF PREP FOR MKR (4")	PORTABLE CHANGEABLE MESSAGE SIGN	TMA (STATIONARY)	TMA (MOBILE OPERATION)
	EA	EA	EA	EA	LF	LF	LF	EA	LF	LF	EA	DAY	DAY
PROJECT LIMITS	4	4	4	332	20,960	10,480	10,480	132	20,960	20,960	2	00	12
PROJECT TOTALS	4	4	4	332	20,960	10,480	10,480	132	20,960	20,960	2	00	12



Rajasegaram Ranjith

04/19/2022

4 of 5

Dallas District Bridge

SH 34

BARDWELL RESERVOIR REPAIR LOCATION 4

FILE: SEE PATH	DN: RR	CK: RM	DW: RR	CK: RM
© TxDOT 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
	DIST	COUNTY	SHEET NO.	
	DAL	ELLIS	9	

FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Details_2_Rail Retrofit\100% Submission\04-18-2022\Cover & Qty.dwg
 DATE: 4/19/2022 TIME: 8:06:31 AM

SUMMARY OF QUANTITIES TABLE

422-6016	428-6001	429-6003	429-6007	438-6004	451-6004	496-6025	780-6002	786-6001
APPROACH SLAB (HPC)	PENETRATING CONCRETE SURFACE TREATMENT	CONC STR REPAIR(DECK REP(PART DEPTH))	CONC STR REPAIR (VERTICAL & OVERHEAD)	CLEANING AND SEALING EXIST JOINTS (CL7)	RETROFIT RAIL (TY T131RC)	REMOV STR (APPROACH SLAB)	CNC CRACK REPAIR (DISCRETE) (INJECT)	CARBON FIBER REINF POLYMER PROTECTION
CY	SY	SF	SF	LF	LF	EA	LF	SF
48.2	17471	165	1876	3960	10510	2	2.5	320

BRIDGE: SH 34 OVER BARDWELL RESERVOIR
 NBI: 18-071-0568-01-022



Bent Spall



Column Spall



Bent Spall



Concrete Spall



Column Damage



Rail Damage



Backwall Spall



Pan Girder Spall



Concrete Spall



Pan Girder Concrete crack

GENERAL NOTES:

QUANTITIES VARIATIONS:


- Quantities shown are based on the best available information. Actual quantities shall be field measured and paid for at the unit price bid. Limits of work for surface repairs shall be as directed by the Engineer.
- Field verify limits and quantities shown prior to beginning work. Report substantial discrepancies to the Engineer of record for resolution adjustment of quantities as deemed necessary. Payment will be for the field measured repair at the unit price bid.

UNEXPECTED CONDITIONS:

- If conditions other than those indicated are encountered, perform repairs in accordance with any applicable details provided in the plans. In the event that no details provided fit the situation encountered, place temporary protection over the location as directed by the Engineer and refer the problem to the District Bridge Section for resolution. Provide the District Bridge Section with appropriate photos, sketches with dimensions and other material necessary to fully describe the problem.

CONCRETE REQUIREMENTS:

- Provide repair materials and Perform all concrete repair work in accordance with item 429 and TXDOT 2021 Concrete Repair Manual
- Concrete shall be of a low shrinkage or shrinkage controlled type.
- Submit proposed repair material to the Engineer for approval.
- Existing concrete shall be in saturated surface dry condition at the time of new concrete placement.
- Apply penetrating concrete surface treatment to deck surface (curb to curb) per item 428.
- When repairing concrete spall on bent caps, include bond breaker between superstructure and substructure repair material (TYP.)
- Crack in the pan girder shall be repaired in accordance with item 780.



Rajasegaram Ranjith
 04/19/2022

5 of 5

		Dallas District Bridge	
<h2>SH 34 BARDWELL RESERVOIR</h2> <h3>SUMMARY OF QUANTITIES</h3>			
FILE: SEE PATH	DN: RR	CK: RM	DW: RR
2022	CONT	SECT	JOB
0568	01	059	SH 34
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	10	

TCP GENERAL NOTES

1. LIMIT LANE CLOSURES ALONG THE HIGHWAY AND AT CROSS STREETS TO THE HOURS BETWEEN 9:00 AM AND 3:30 PM, UNLESS OTHERWISE APPROVED BY THE ENGINEER.
2. LIMIT THE LENGTH OF DAILY WORK TO AN AREA OF OPERATION WHICH CAN BE COMPLETED IN ONE WORK DAY TO ALLOW FOR TWO-WAY TRAFFIC AT NIGHT. LENGTH OF THE WORK AREA IS NOT TO EXCEED ONE MILE, UNLESS APPROVED BY THE ENGINEER. WITHIN THE WORK AREA ONLY PLACE LANE CLOSURES WHERE ACTUAL WORK IS BEING PERFORMED.
3. TRAFFIC CONTROL AND LANE CLOSURES WILL BE IN ACCORDANCE WITH THE PLANS, BC, TCP, AND WZ STANDARDS OR AS DIRECTED BY THE ENGINEER.
4. THE CONTRACTOR WILL PROVIDE AND MAINTAIN SKILLED FLAGGERS EQUIPPED WITH TWO-WAY RADIOS TO HANDLE TRAFFIC THROUGH THE WORK AREAS.
5. THE CONTRACTOR WILL PROVIDE A PILOT CAR TO BE USED AS DIRECTED BY THE ENGINEER.
6. AT LEAST ONE-LANE (TWO-WAY TRAFFIC CONTROL) SHALL REMAIN OPEN AT ALL TIMES DURING LANE CLOSURES.
7. THE CONTRACTOR SHALL COVER OR REMOVE ANY EXISTING SIGN OR PAVEMENT MARKING THAT CONFLICTS WITH TCP TO AVOID CONFUSION FOR THE TRAVELLING PUBLIC. PAYMENT FOR THIS WORK SHALL BE SUBSIDIARY TO ITEM 502.
8. TEMPORARY SW3P EROSION CONTROL MEASURES SHALL ONLY BE PLACED IN AREAS WHERE SOIL DISTURBANCE OR OTHER POTENTIAL POLLUTANT-GENERATING ACTIVITIES ARE EXPECTED TO OCCUR WITHIN TWO WEEKS. TEMPORARY SW3P EROSION CONTROL MEASURES SHALL BE REMOVED IN EACH AREA WITHIN TWO WEEKS OF VEGETATION ESTABLISHMENT OR AS APPROVED BY THE ENGINEER.

SUGGESTED SEQUENCE OF WORK

PHASE I


1. ERECT PROJECT SIGNS AND ADVANCE WARNING SIGNS AS SPECIFIED IN BC AND TCP STANDARDS OR AS DIRECTED BY THE ENGINEER.
2. PLACE SW3P DEVICES IN ACCORDANCE WITH APPLICABLE STANDARDS AND AS DIRECTED BY THE ENGINEER.
3. CONSTRUCT T131RC RAIL WITH DAILY LANE CLOSURES IN EACH DIRECTION. START CONSTRUCTION OF RAIL ON THE UPSTREAM END AND COMPLETE CONSTRUCTION OF RAIL ONE DIRECTION AT A TIME. DURING CONSTRUCTION MAINTAIN POSITIVE DRAINAGE.
4. INSTALL CTB AND CRASH CUSHION AT BOTH ENDS OF THE BRIDGE.

PHASE II

1. PERFORM CONCRETE STRUCTURE REPAIR (DECK REPAIR), CLEAN AND SEAL EXISTING JOINTS, AND APPROACH SLAB (EXTEND).
2. CONSTRUCT BRIDGE REPAIRS WITHOUT INTERRUPTION OF TRAFFIC FLOW. FOLLOW TCP(1-2)-18.
3. PERFORM CONCRETE STRUCTURE REPAIR (VERTICAL AND OVERHEAD) ON BRIDGE.

PHASE III

1. REMOVE EXISTING ALUMINUM RAILING.
2. INSTALL MBGF AND SGT ON BRIDGE ENDS.
3. REMOVE CTB AND CRASH CUSHION AT EACH END OF THE BRIDGE.
4. PLACE PERMANENT PAVEMENT MARKINGS FOLLOWING TCP(3-1)-13 AND TCP(3-3)-14
5. PERFORM FINAL CLEANUP AS DIRECTED BY THE ENGINEER.
6. REMOVE BARRICADES AND WARNING SIGNS.




Juan A. Paredes, P. E. 4/15/2022
Signature of Registrant & Date




SH 34
TRAFFIC CONTROL PLAN
NARRATIVE

DESIGN JAP	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. SEE TITLE SHEET		HIGHWAY NO. SH 34
GRAPHICS JAP	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK MJK	TEXAS	DAL	ELLIS	11
CHECK	CONTROL	SECTION	JOB	
	0568	01	059	


DATE: 4/12/2022 TIME: 3:01:25 PM
 FILE: pw:\txdot\projectwiseonline.com\TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\1. General\TCP\Typical\Sections 1.dgn

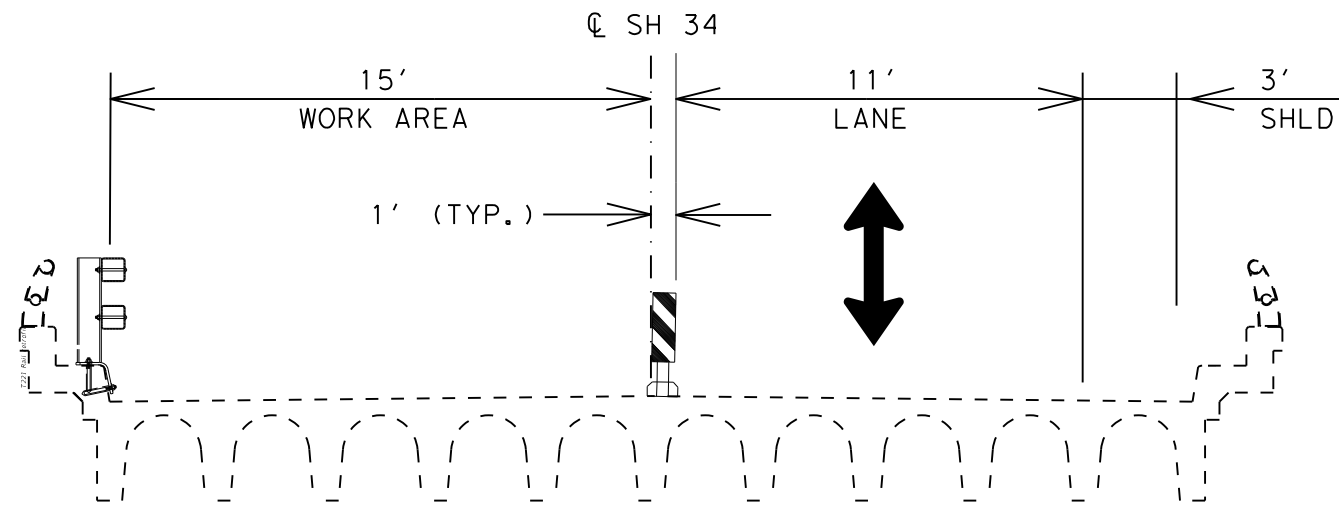


PHASE I
 CONSTRUCTION OPERATION PRESENT

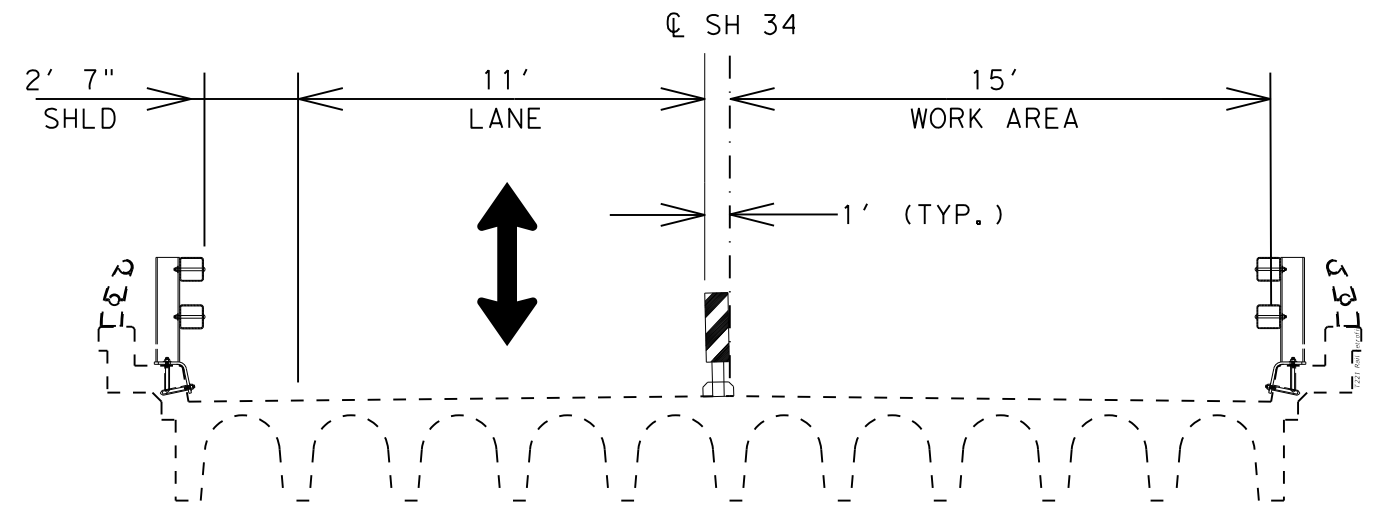


PHASE I
 CONSTRUCTION OPERATION PRESENT

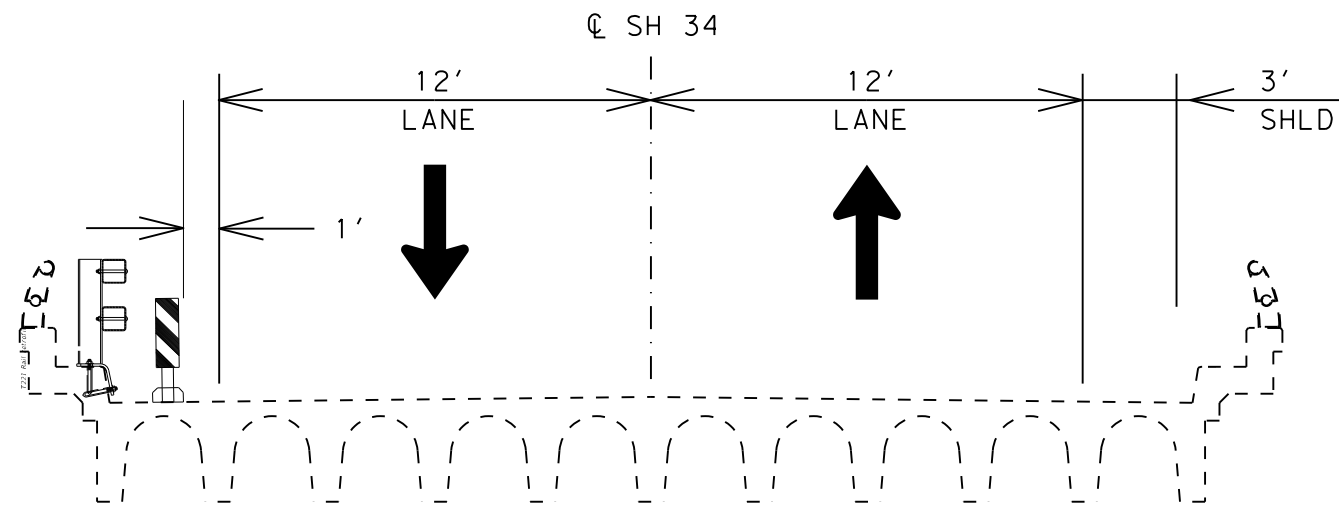

PHASE I
 CONSTRUCTION OPERATIONS NOT PRESENT

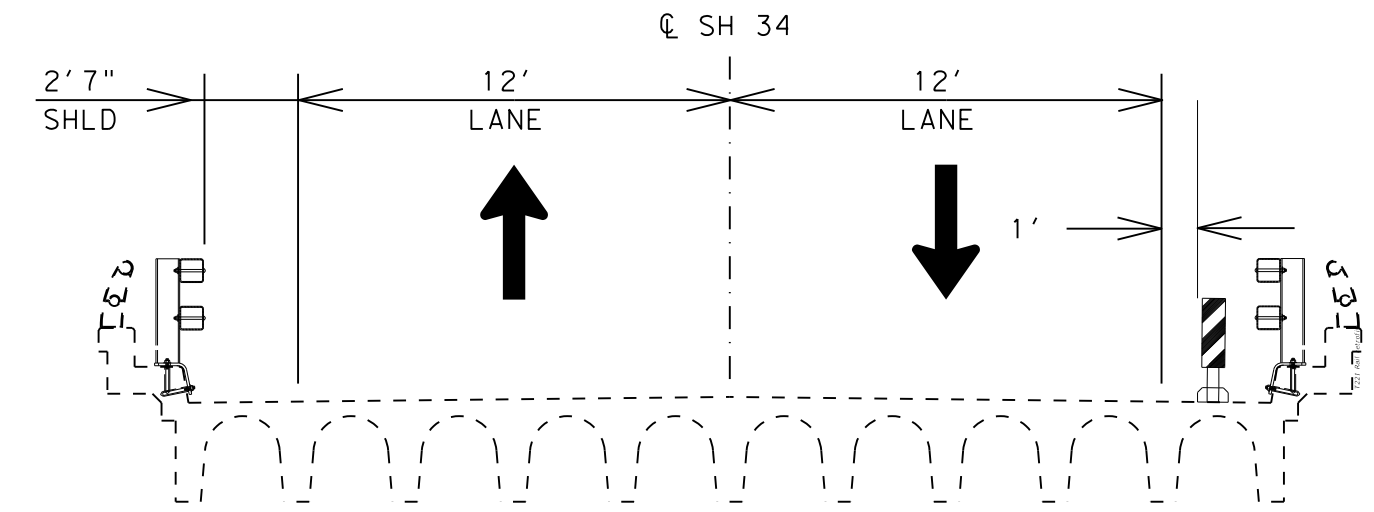

PHASE I
 CONSTRUCTION OPERATIONS NOT PRESENT



Juan A. Paredes, P.E. 4/15/2022
 Signature of Registrant & Date



TRAFFIC CONTROL PLAN
 TYPICAL SECTIONS

DESIGN	FED. RD. DIV. NO.	PROJECT NO.			HIGHWAY NO.
JAP	6	SEE TITLE SHEET			SH 34
GRAPHICS		STATE	DISTRICT	COUNTY	SHEET NO.
JAP		TEXAS	DAL	ELLIS	
CHECK		CONTROL	SECTION	JOB	
MJK		0568	01	059	
CHECK					12

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT or any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for any errors or damages resulting from its use.

DATE: 02/27/2022 3:24:17 PM
 FILE: DOCUMENTNAME\project\wiseonline.com:TXDOTS\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\BC(1)-21.dgn

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:


1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).


THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12

 Texas Department of Transportation		Traffic Safety Division Standard
BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS		
BC (1) - 21		
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT: 0568	SECT: 01
	JOB: 059	HIGHWAY: SH 34
4-03 7-13		
9-07 8-14		
5-10 5-21	DIST: DAL	COUNTY: ELLIS
		SHEET NO.: 13

DATE: 02/27/2022 3:24:17 PM
 FILE: \\DAL\Design\Projects\056801059\056801059.dwg
 PROJECT: 056801059
 SHEET: BC(2)-21
 TITLE: BARRICADE AND CONSTRUCTION PROJECT LIMIT
 DRAWN BY: [Redacted]
 CHECKED BY: [Redacted]
 APPROVED BY: [Redacted]
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions or for damages resulting from its use.


TYPICAL LOCATION OF CROSSROAD SIGNS

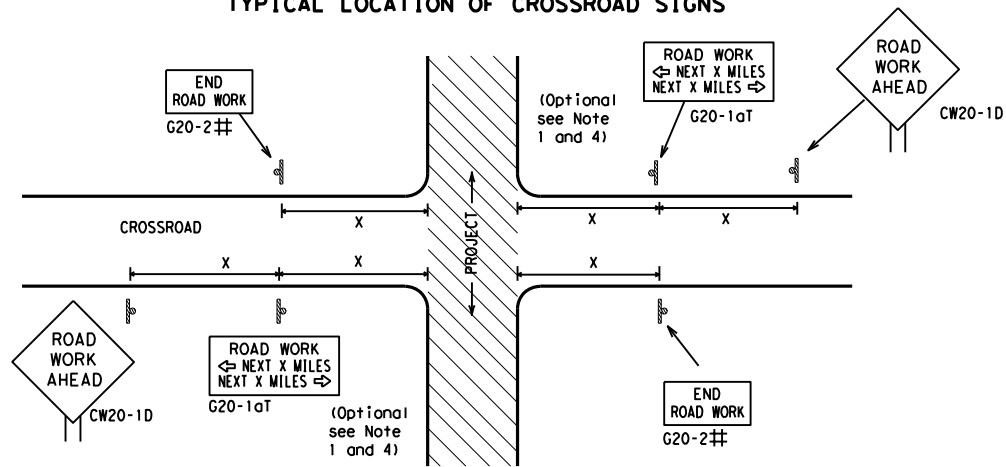

May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

1. The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
3. Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
4. The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
6. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

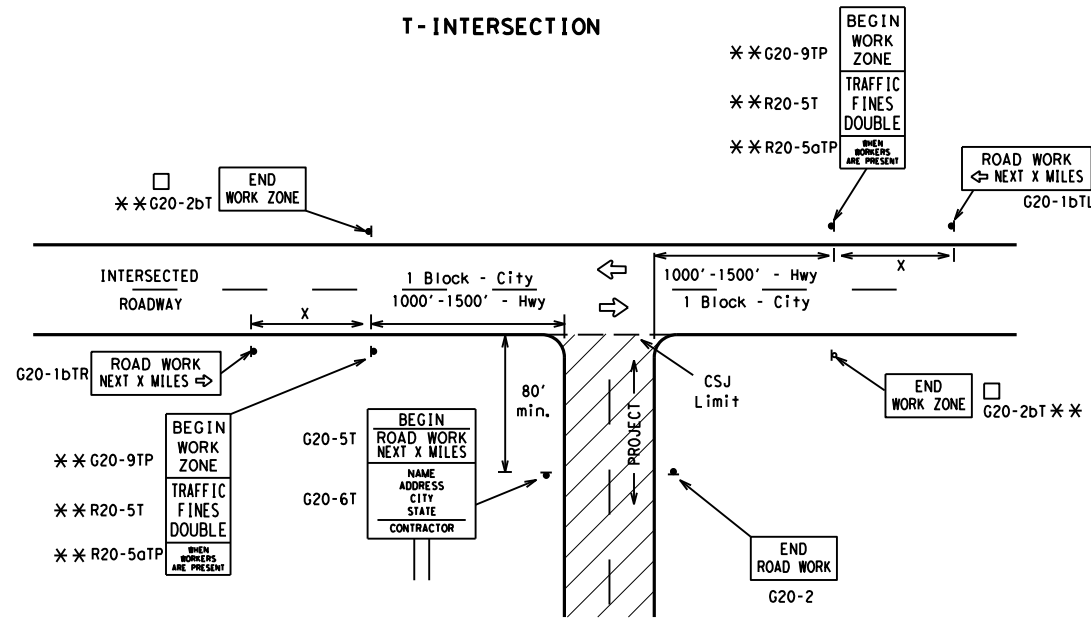

CSJ LIMITS AT T-INTERSECTION

1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{1,5,6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
			*	* ³


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


1. Special or larger size signs may be used as necessary.
2. Distance between signs should be increased as required to have 1500 feet advance warning.
3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
5. Only diamond shaped warning sign sizes are indicated.
6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

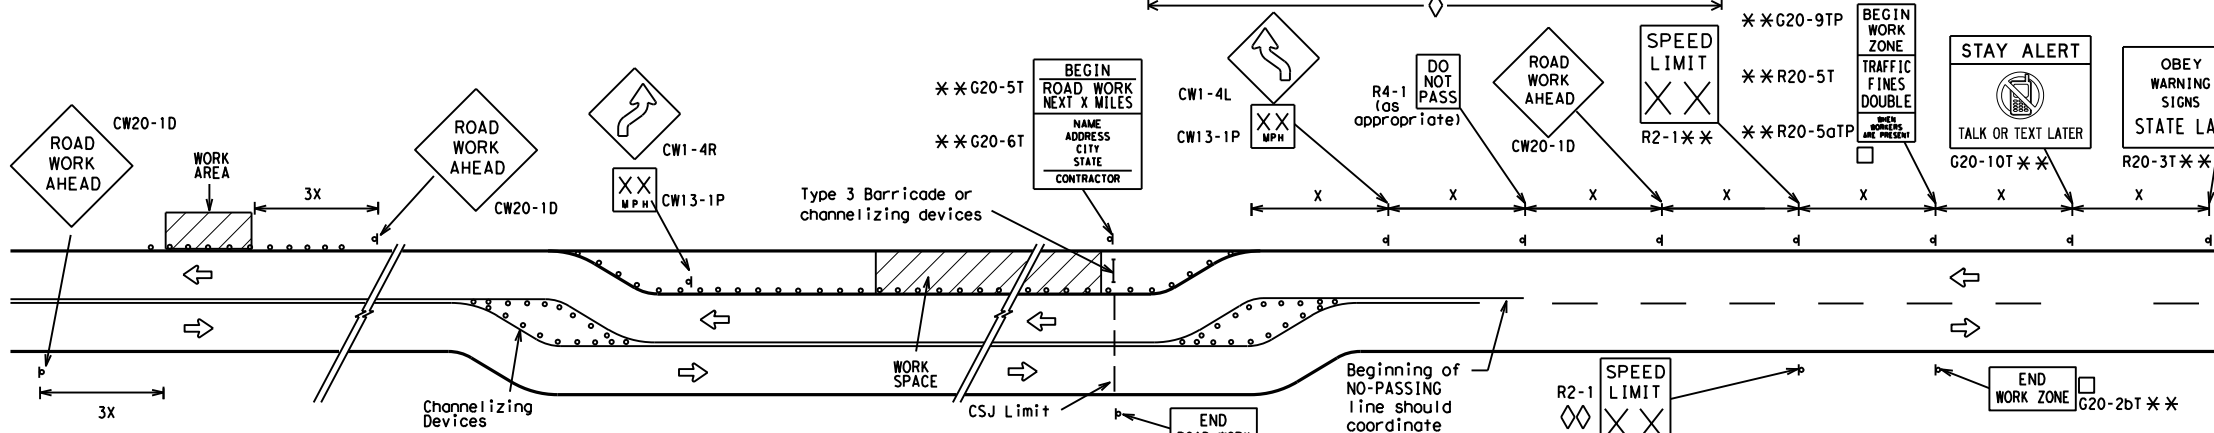


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

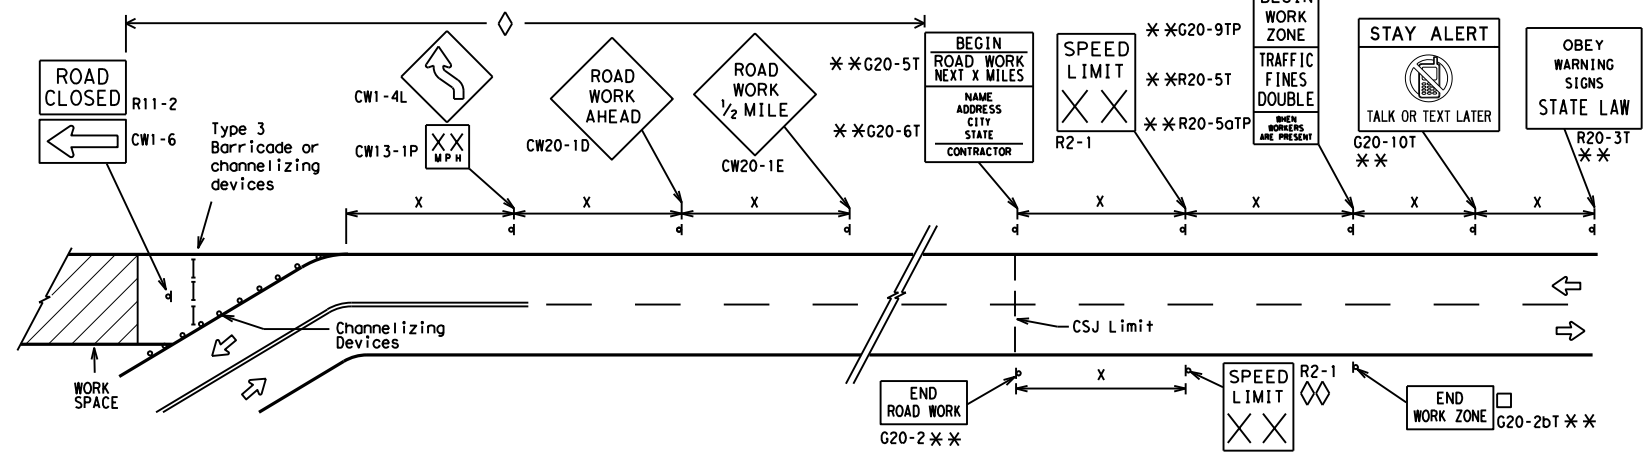

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS

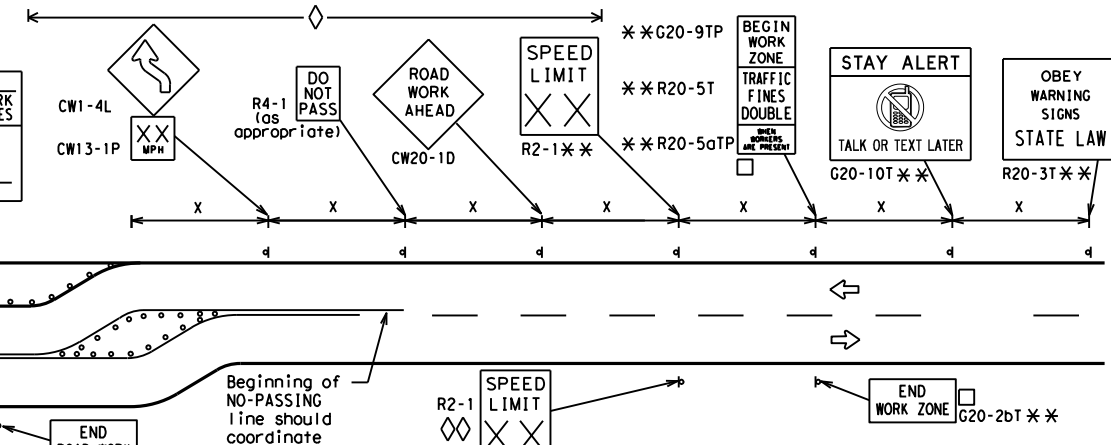

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "x" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
 - ** CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
 - ◇ Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
 - ◇◇ Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND	
—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12

Texas Department of Transportation
Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION PROJECT LIMIT


BC(2)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	DAL	ELLIS	14	

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

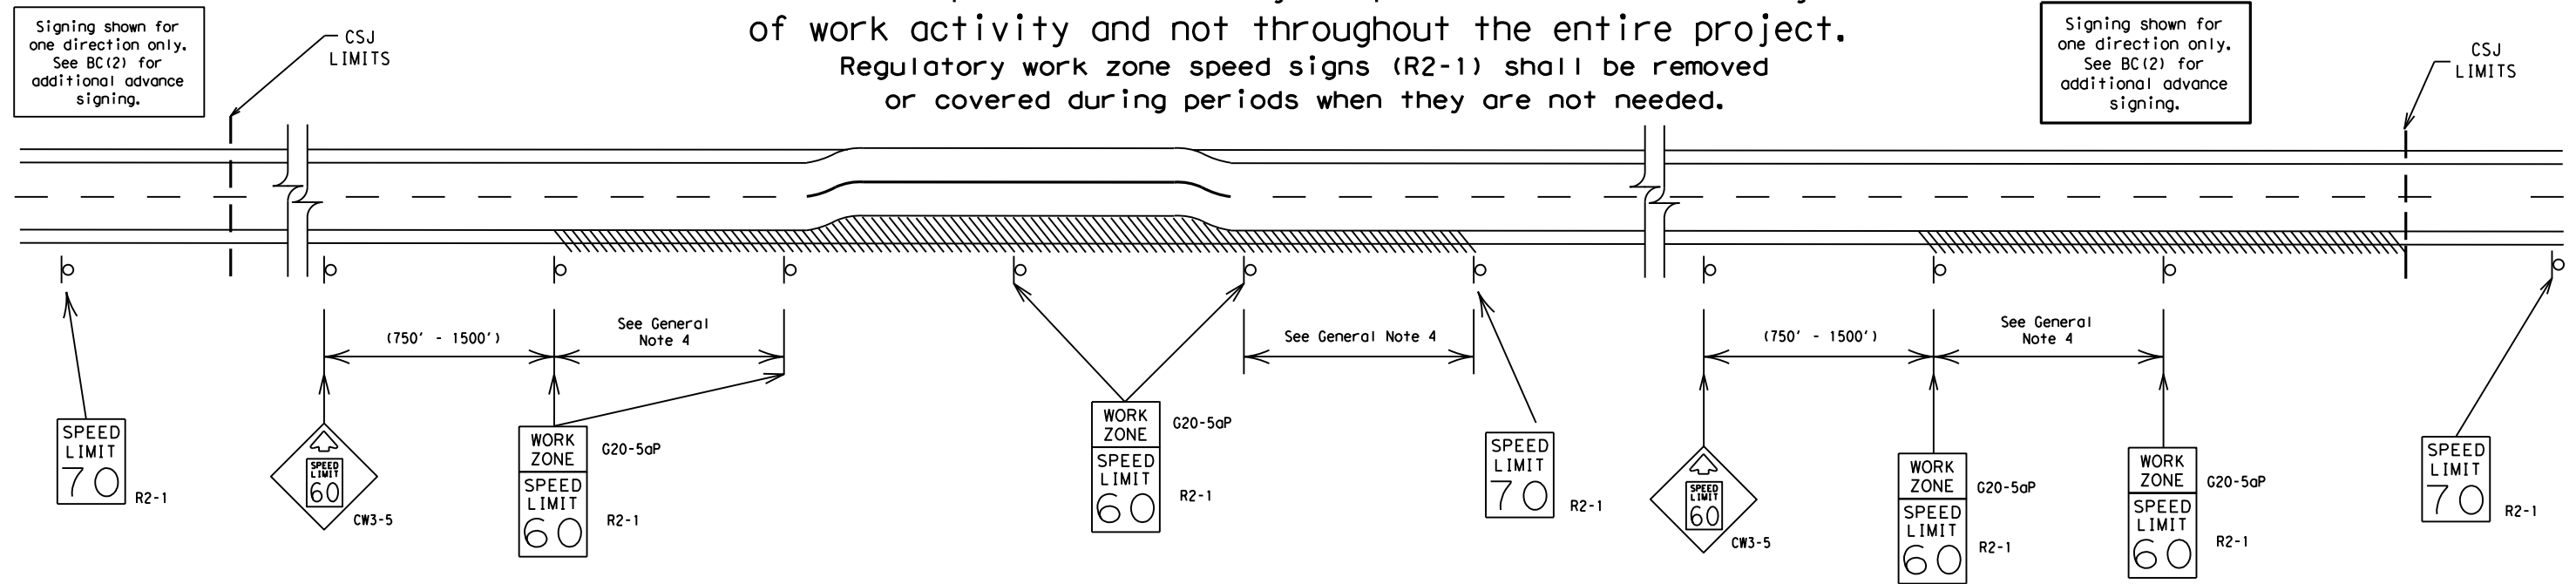

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Law enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this document or for any damages resulting from its use.

DATE: 02/27/2022 3:24:17 PM
FILE: DOCUMENT\NAME\PROJECT\WIS\online.com:TXDOTS\Documents\18 - DAL\Design Projects\050000059\050000059.dgn


SHEET 3 OF 12

		Traffic Safety Division Standard	
<h2>BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT</h2>			
<h3>BC (3) - 21</h3>			
FILE:	bc-21.dgn	DW:	TxDOT
© TxDOT	November 2002	CONT SECT:	JOB HIGHWAY
REVISIONS		0568 01	059 SH 34
9-07 8-14		DIST	COUNTY SHEET NO.
7-13 5-21		DAL	ELLIS 15

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 02/27/2022 3:24:11 PM
 FILE: DOCUMENTS\PROJECTS\18 - DAL\Design Projects\0568010594 - Design\Plan Set\2 - TCP\bc-21.dgn


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

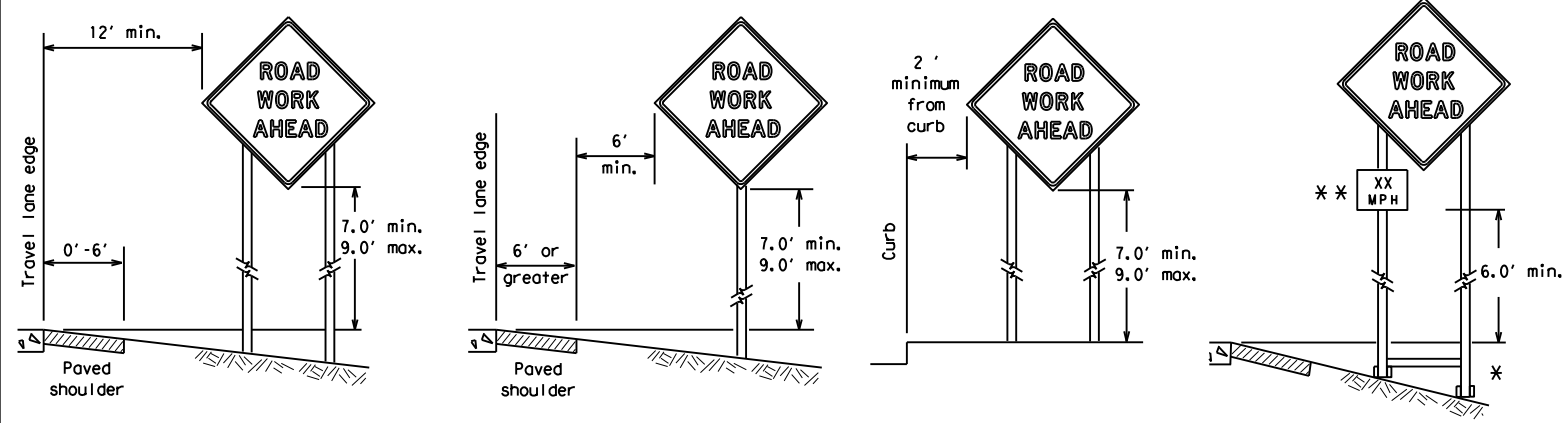

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

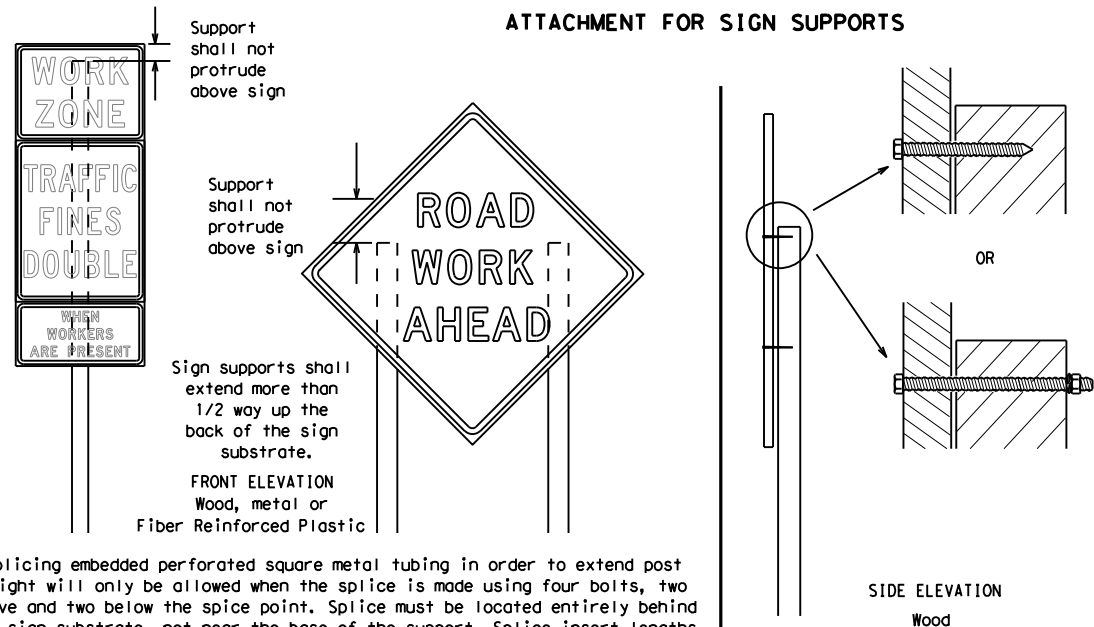

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - Long-term stationary - work that occupies a location more than 3 days.
 - Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - Short, duration - work that occupies a location up to 1 hour.
 - Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

- The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS


- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

- Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

STOP/SLOW PADDLES

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflectORIZED when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

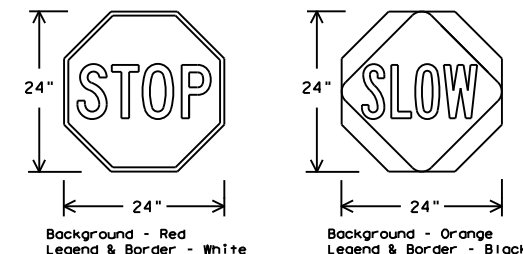

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

SHEET 4 OF 12

Texas Department of Transportation
 Traffic Safety Division Standard



BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0568	01	059	SH 34				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	DAL	ELLIS	16					


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 02/27/2022 3:24:17 PM
 FILE: D:\DOCUMENTS\PROJECTS\056801059\4 - Design\Plan Set\CP\bc-21.dgn
 DAL\Design Projects\056801059\4 - Design\Plan Set\CP\bc-21.dgn

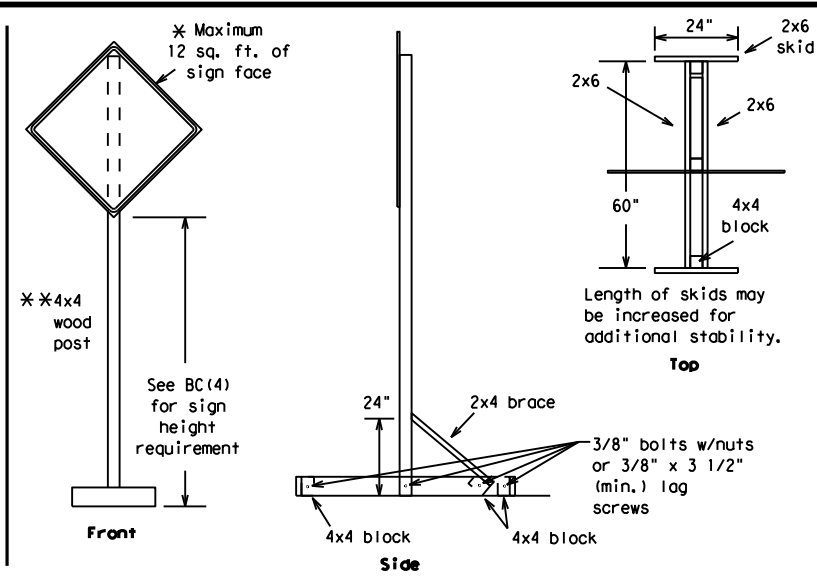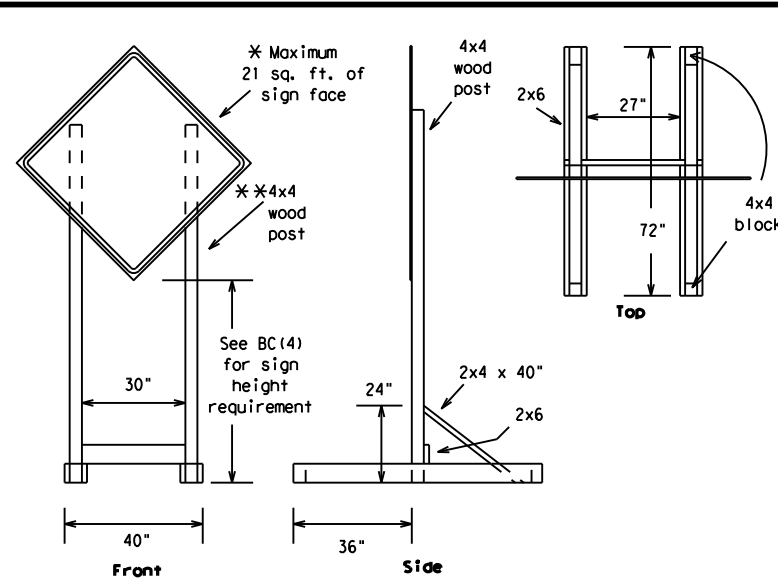



SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

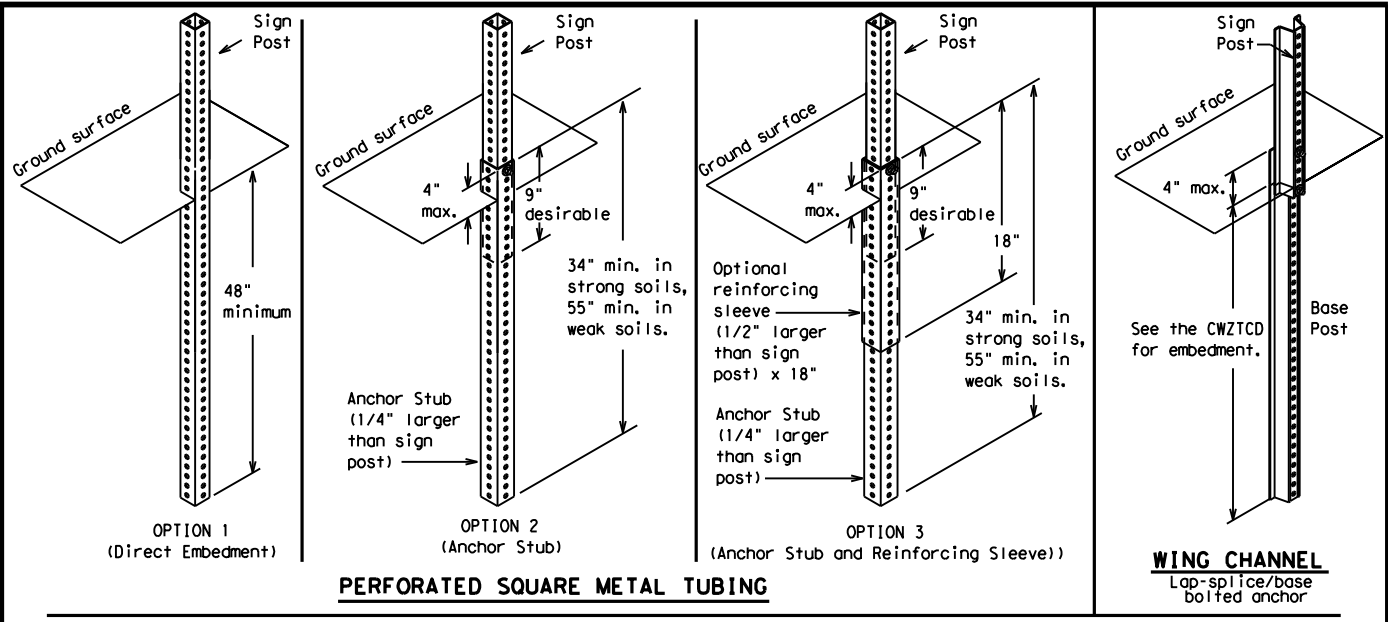

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

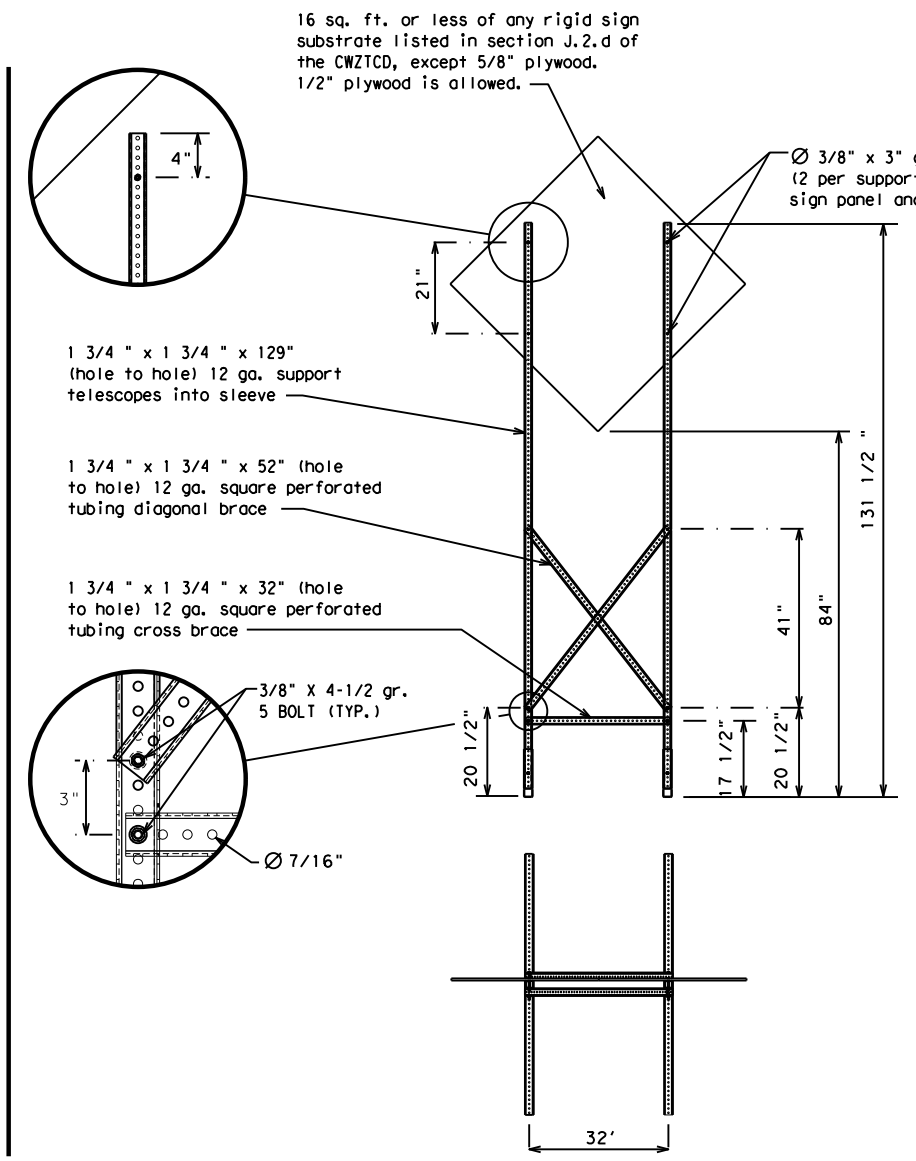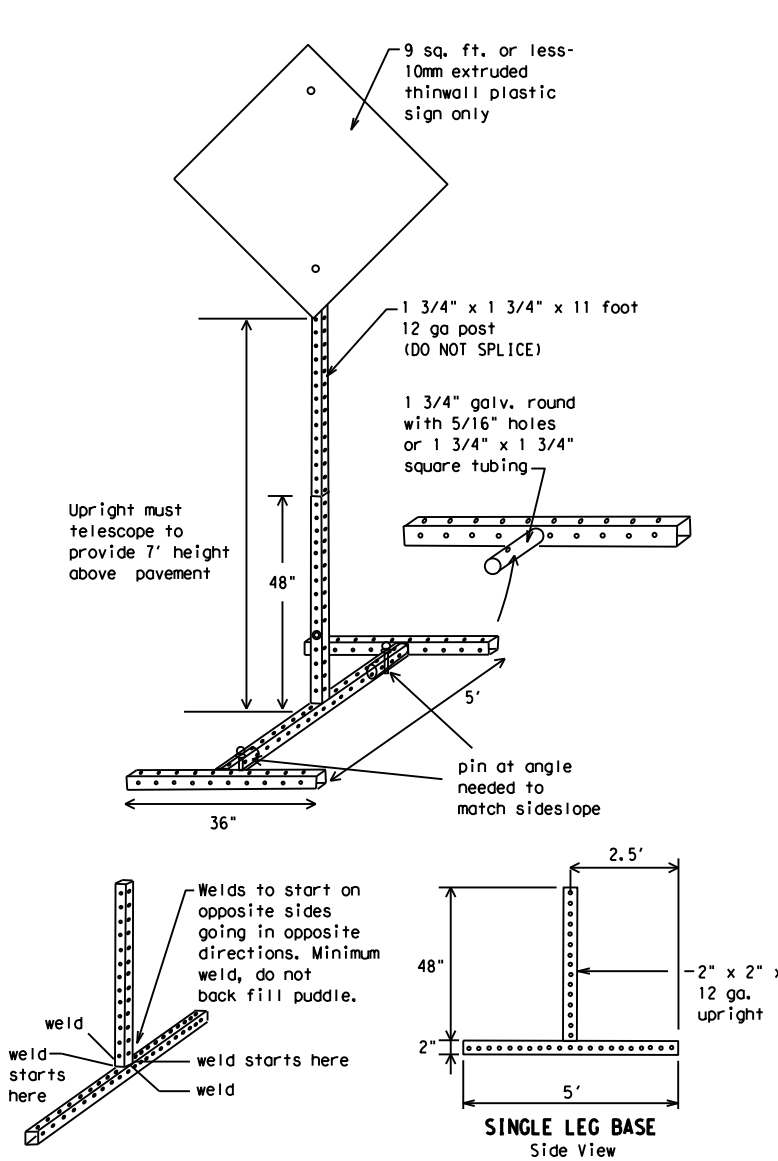

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

WEDGE ANCHORS
 Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS
 MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

- GENERAL NOTES**
- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
 - No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
 - When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
- * See BC(4) for definition of "Work Duration."
 - ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
 - See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
©TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS	0568	01	059	SH	34				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	DAL	ELLIS	17					

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT
RIGHT X LANES CLOSED	RIGHT X LANES OPEN
CENTER LANE CLOSED	DAYTIME LANE CLOSURES
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE
EXIT CLOSED	RIGHT LN TO BE CLOSED
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI
XXXXXXXX BLVD CLOSED	

Other Condition List

ROADWORK XXX FT	ROAD REPAIRS XXXX FT
FLAGGER XXXX FT	LANE NARROWS XXXX FT
RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
DETOUR X MILE	ROUGH ROAD XXXX FT
ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
BUMP XXXX FT	US XXX EXIT X MILES
TRAFFIC SIGNAL XXXX FT	LANES SHIFT *

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT	FORM X LINES RIGHT
DETOUR NEXT X EXITS	USE XXXXX RD EXIT
USE EXIT XXX	USE EXIT I-XX NORTH
STAY ON US XXX SOUTH	USE I-XX E TO I-XX N
TRUCKS USE US XXX N	WATCH FOR TRUCKS
WATCH FOR TRUCKS	EXPECT DELAYS
EXPECT DELAYS	PREPARE TO STOP
REDUCE SPEED XXX FT	END SHOULDER USE
USE OTHER ROUTES	WATCH FOR WORKERS
STAY IN LANE *	

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for misinterpretation or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHS
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation # IH-number, US-number, SH-number, FM-number



BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC (6) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT:	SECT:	JOB:	HIGHWAY:				
REVISIONS		0568	01	059	SH 34				
9-07	8-14	DIST:	COUNTY:	SHEET NO.:					
7-13	5-21	DAL	ELLIS	18					

DATE: 02/27/2022 3:24:17 PM
FILE: DOCUMENT\PROJECT\wiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design Plan Set\2 - CP\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 02/27/2022 3:24:13 PM
 FILE: DOCUMENTNAME\project\wiseonline.com\TXDOTS\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\2 - TCP\bc-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

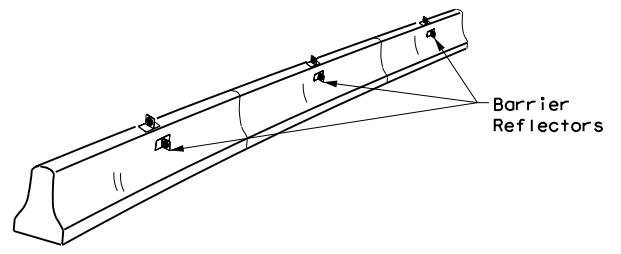

CONCRETE TRAFFIC BARRIER (CTB)


- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

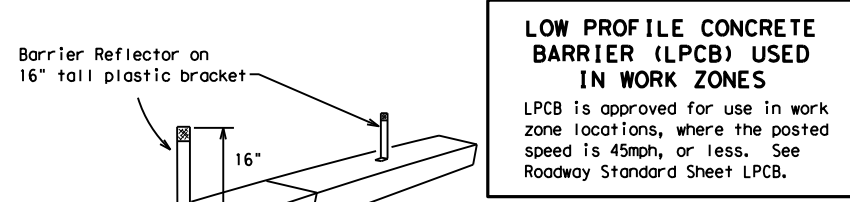

LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES
 LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

LOW PROFILE CONCRETE BARRIER (LPCB)

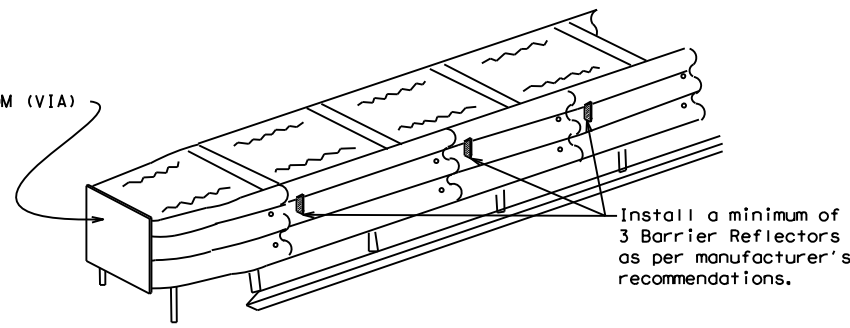

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES
 End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

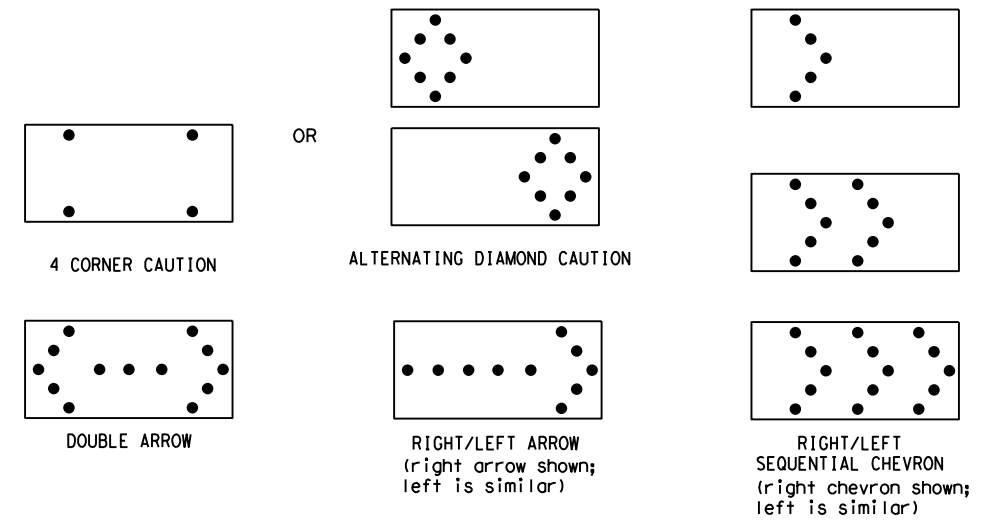

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.

Texas Department of Transportation
 Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION
 ARROW PANEL, REFLECTORS,
 WARNING LIGHTS & ATTENUATOR

BC (7) - 21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	DAL	ELLIS	19	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 02/27/2022 3:24:17 PM
 FILE: DOCUMENTNAME\project\wiseonline.com:TXDOT\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\2 - TCP\bc-21.dgn

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS


- Pre-qualified plastic drums shall meet the following requirements:
- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
 - The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
 - Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
 - Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
 - The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
 - The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
 - Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
 - Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
 - Drum body shall have a maximum unballasted weight of 11 lbs.
 - Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.



BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

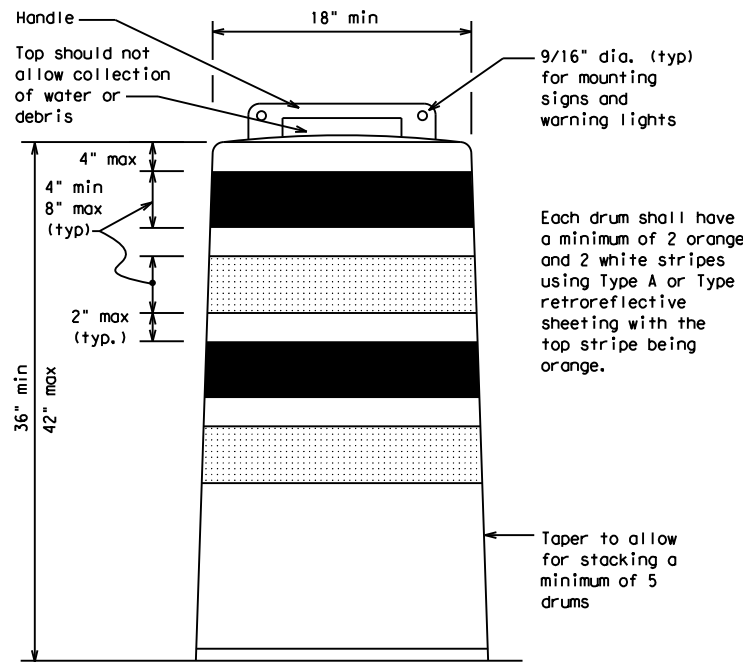

Each drum shall have a minimum of 2 orange and 2 white stripes using Type A or Type B retroreflective sheeting with the top stripe being orange.


Taper to allow for stacking a minimum of 5 drums

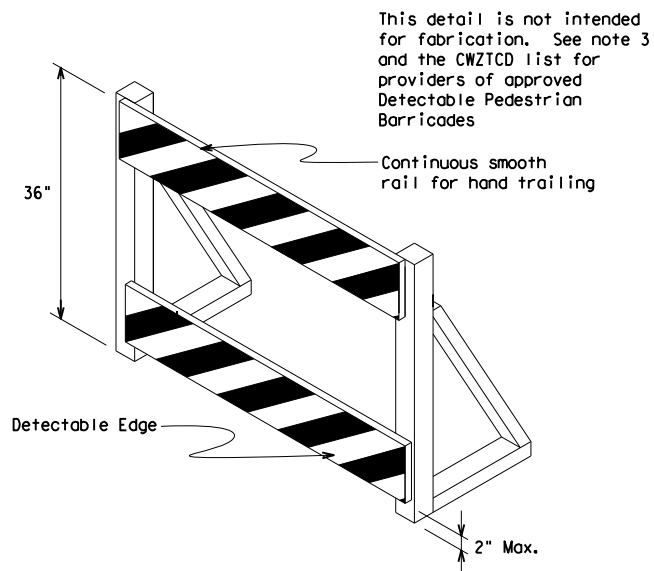


This detail is not intended for fabrication. See note 3 and the CWZTCD list for providers of approved Detectable Pedestrian Barricades

DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign (Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel
mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (8) - 21

FILE:	bc-21.dgn	DW:	TxDOT	CR:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0568	01	059	SH 34				
4-03	8-14	DIST	COUNTY	SHEET NO.					
9-07	5-21	DAL	ELLIS	20					
7-13									


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorporating results or damages resulting from its use.

DATE: 02/27/2022 3:24:17 PM
 FILE: DOCUMENT\PROJECT\WISCONSIN\18 - DAL\Design Projects\0568010594 - Design\Plan Set\2 - TCP\bc-21.dgn

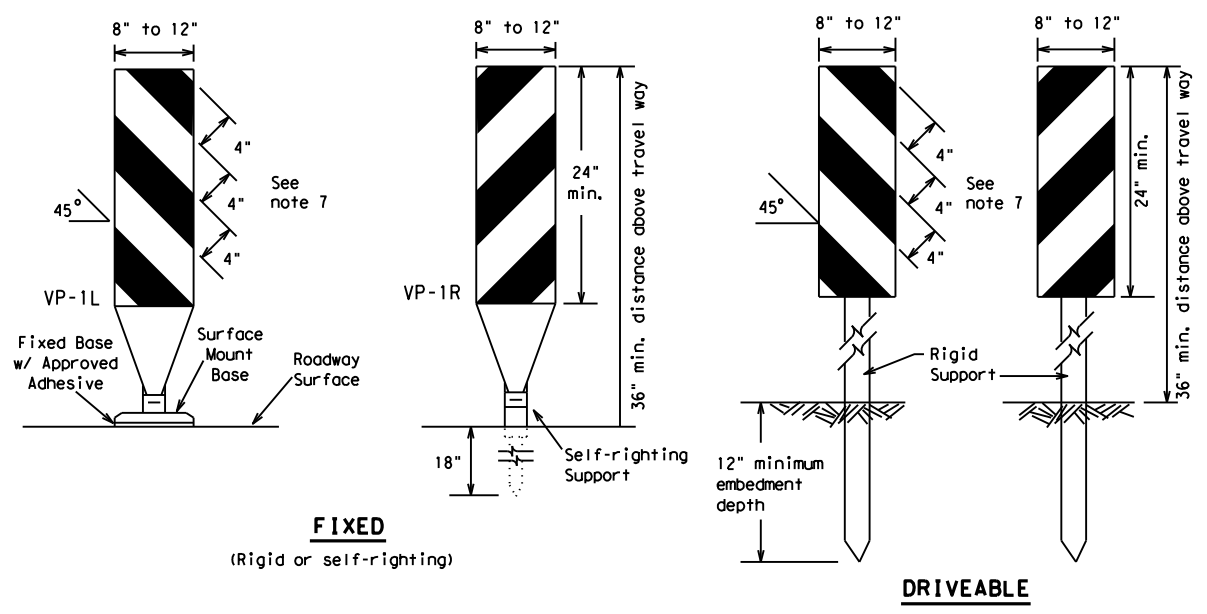

FIXED
(Rigid or self-righting)


DRIVEABLE

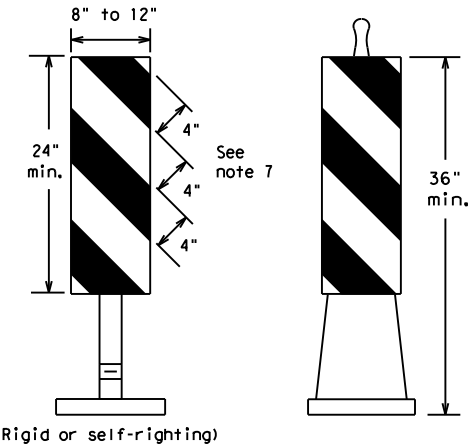

PORTABLE


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

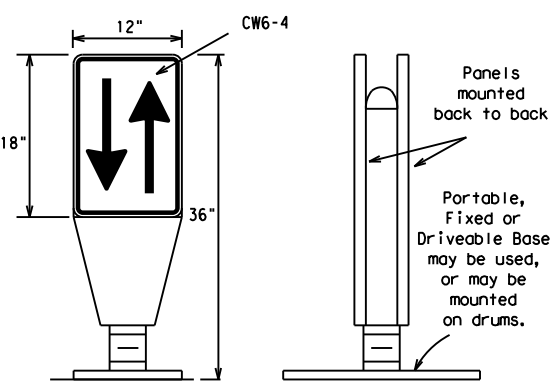

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)


- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

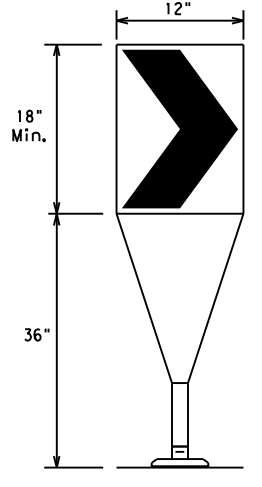

Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

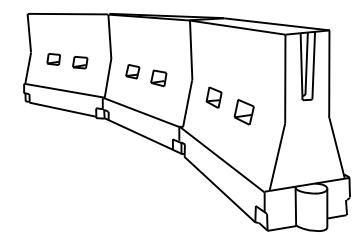

LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths * *			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

* * * Taper lengths have been rounded off.
 L=Length of Taper (FT.) W=Width of Offset (FT.)
 S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (9) - 21


FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	DAL	ELLIS	21	

DATE: 02/27/2022 3:24:13 PM
 FILE: D:\PROJECTS\PROJECTS\18 - DAL\Design Projects\0568010594 - Design\Plan Set\2 - TCP\bc-21.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPE 3 BARRICADES

- Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
- Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
- Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
- Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
- Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
- Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
- Warning lights shall NOT be installed on barricades.
- Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
- Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.

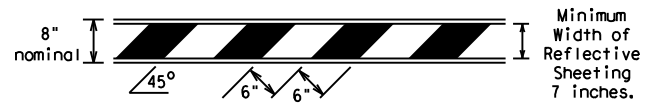


TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

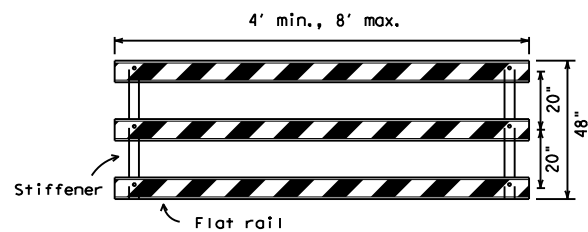


TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

Each roadway of a divided highway shall be barricaded in the same manner.

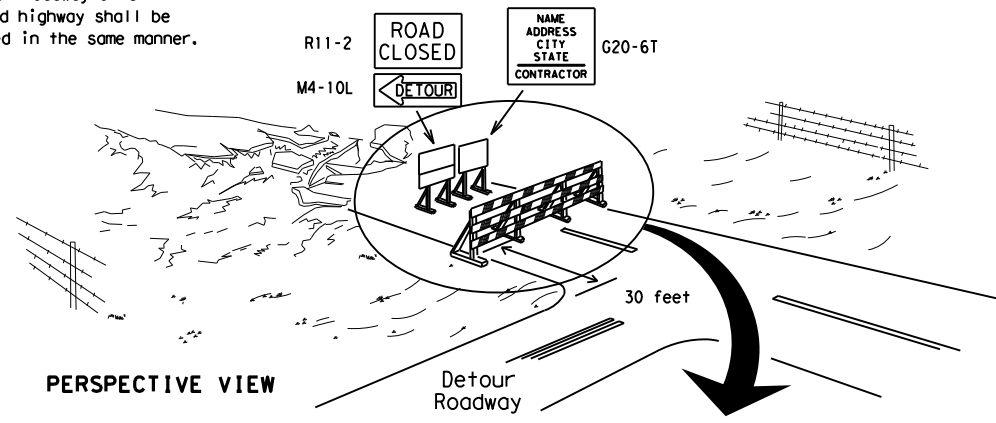

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

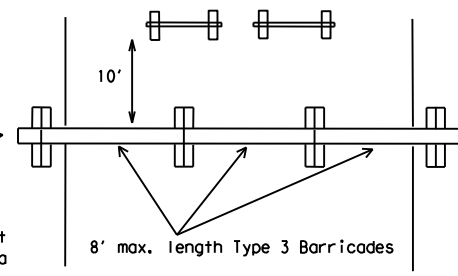


PLAN VIEW

- Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
- Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

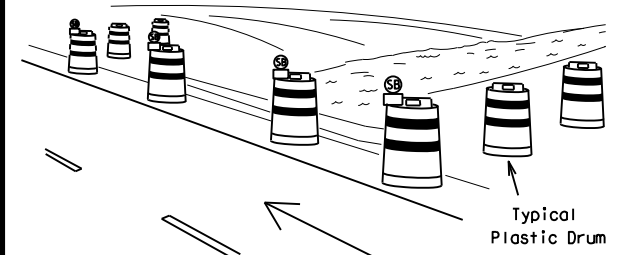


PERSPECTIVE VIEW

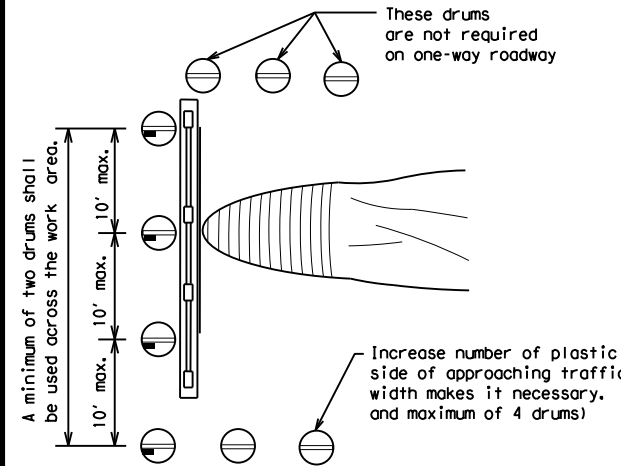

PLAN VIEW

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

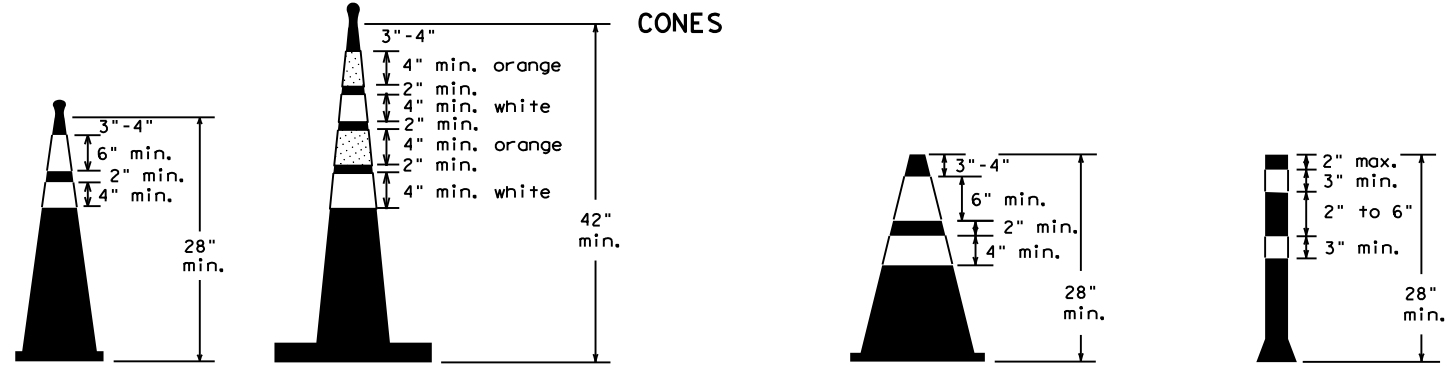


Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

- Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
- One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
- Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
- Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
- 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
- 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
- Cones or tubular markers used on each project should be of the same size and shape.

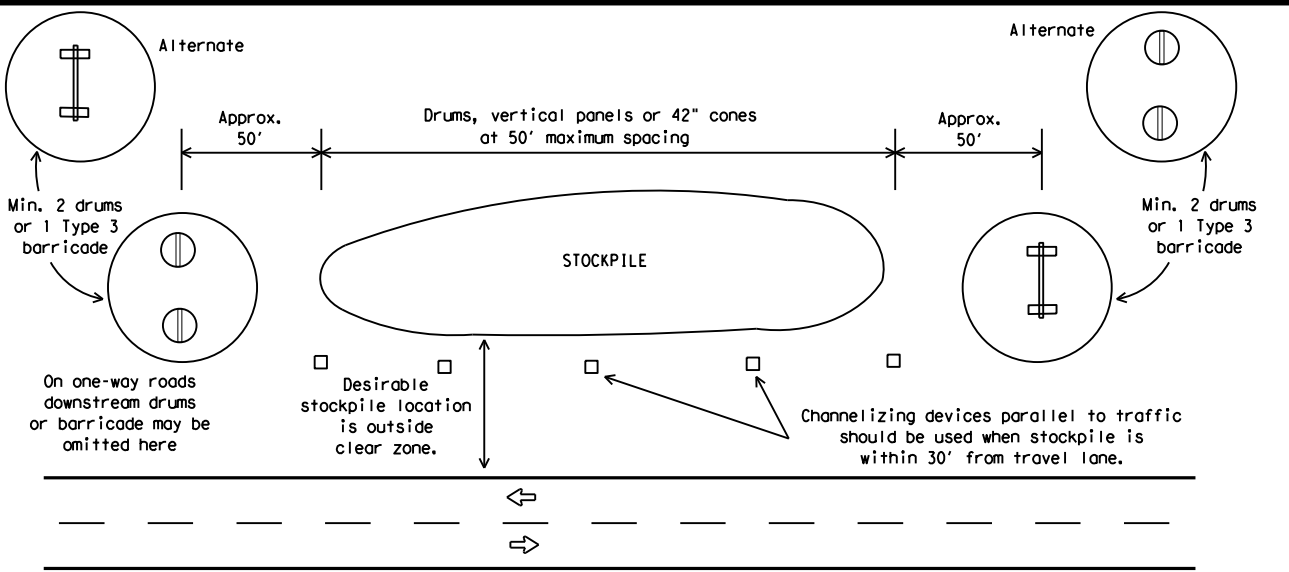

TRAFFIC CONTROL FOR MATERIAL STOCKPILES



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (10) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	DAL	ELLIS	22	

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

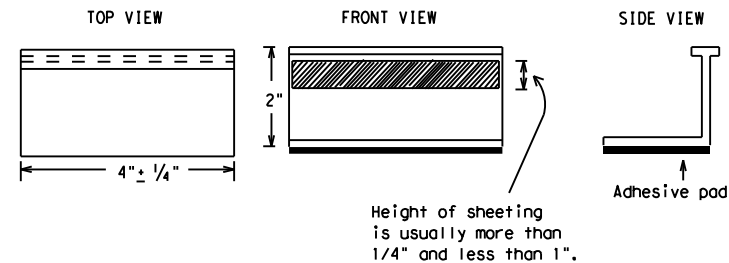

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
2-98 9-07 5-21	DIST	COUNTY	SHEET NO.	
1-02 7-13	DAL	ELLIS	23	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 02/27/2022 3:24:11 PM
 FILE: DOCUMENTNAME\project\wiseonline.com:TxDOT\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\2 - TCP\bc-21.dgn

PAVEMENT MARKING PATTERNS




REFLECTORIZED PAVEMENT MARKINGS - PATTERN A




REFLECTORIZED PAVEMENT MARKINGS - PATTERN B

Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.

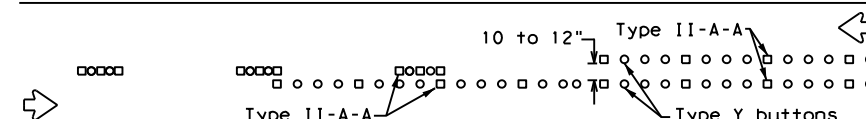


RAISED PAVEMENT MARKERS - PATTERN A

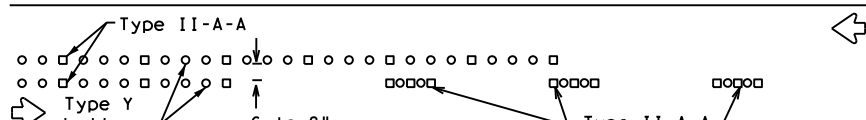


RAISED PAVEMENT MARKERS - PATTERN B

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

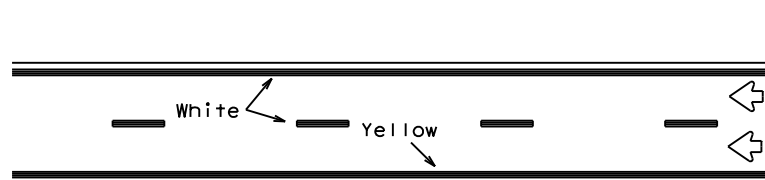

REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

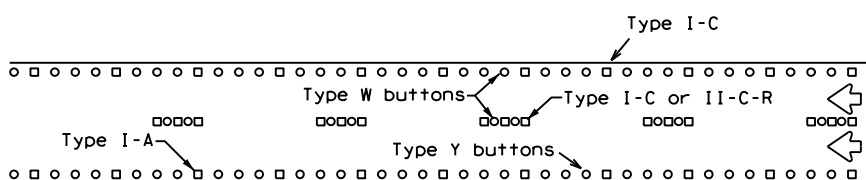


RAISED PAVEMENT MARKERS

EDGE & LANE LINES FOR DIVIDED HIGHWAY




REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

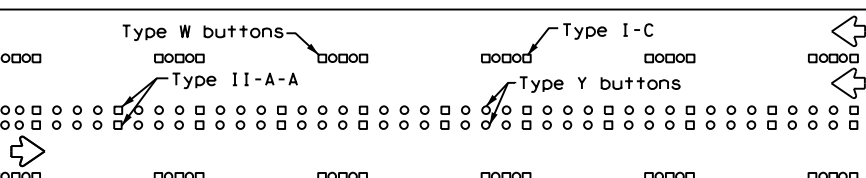


RAISED PAVEMENT MARKERS

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

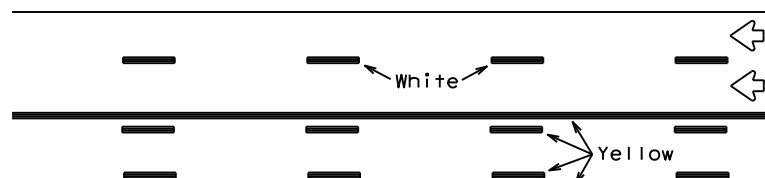

REFLECTORIZED PAVEMENT MARKINGS


Prefabricated markings may be substituted for reflectORIZED pavement markings.

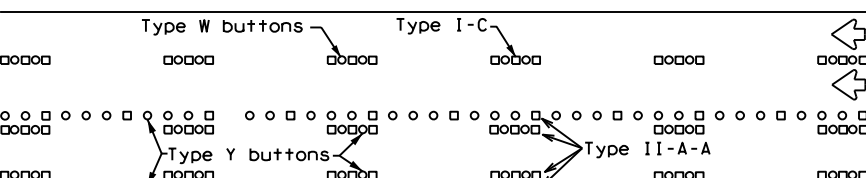




RAISED PAVEMENT MARKERS

TWO-WAY LEFT TURN LANE


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

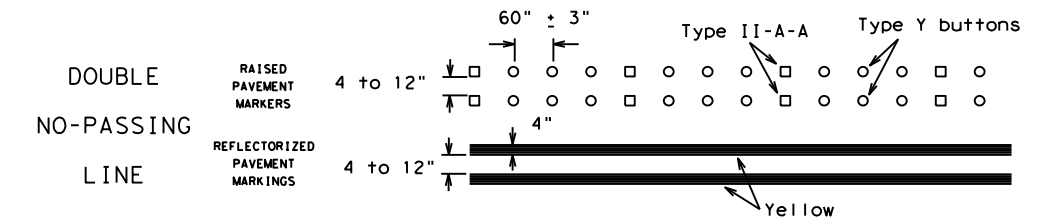

SOLID LINES

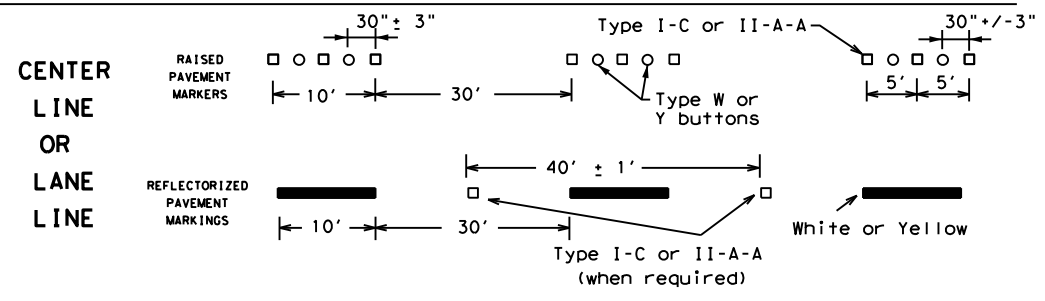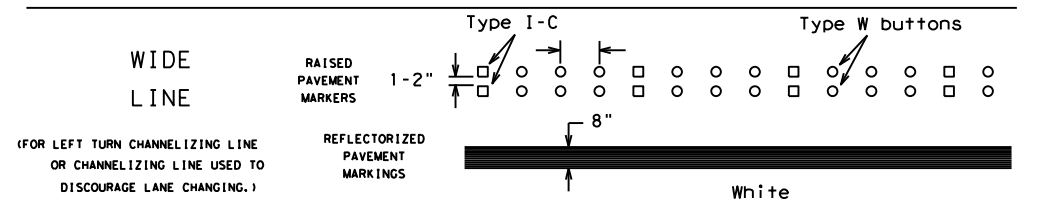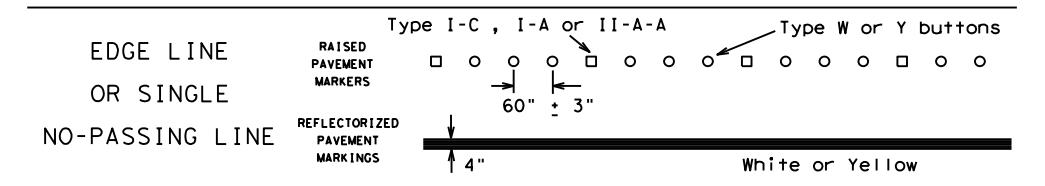


BROKEN LINES

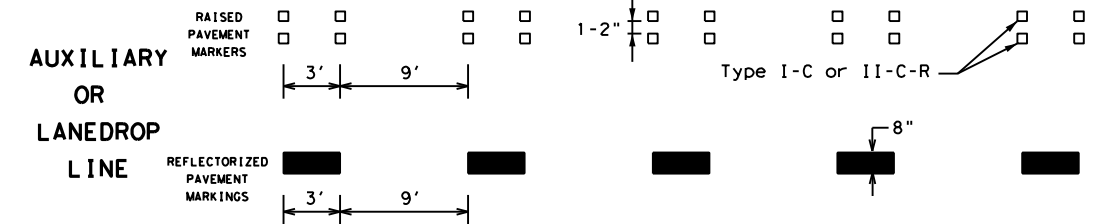

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

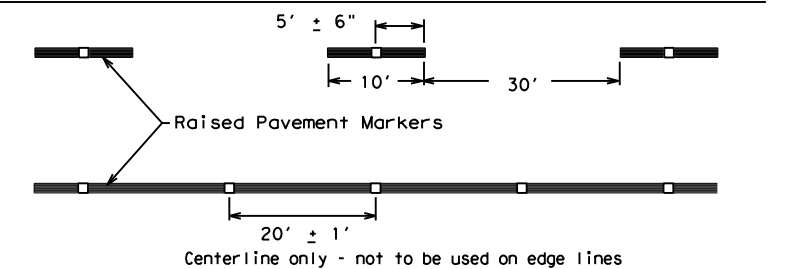

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS


BC(12)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	DAL	ELLIS	24	
11-02 8-14				


Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TXDOT for any purpose whatsoever. TXDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 02/27/2022 3:24:11 PM
 FILE: DOCUMENTNAME\project\wiseonline.com:TXDOT\5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\2 - TCP\bc-21.dgn


DATE: 4/12/2022 3:02:09 PM
 FILE: \\txdot\project\wisonline.com\TXDOT5\Documents\18 - DAL\Design Projects\05090909\05090909.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format.

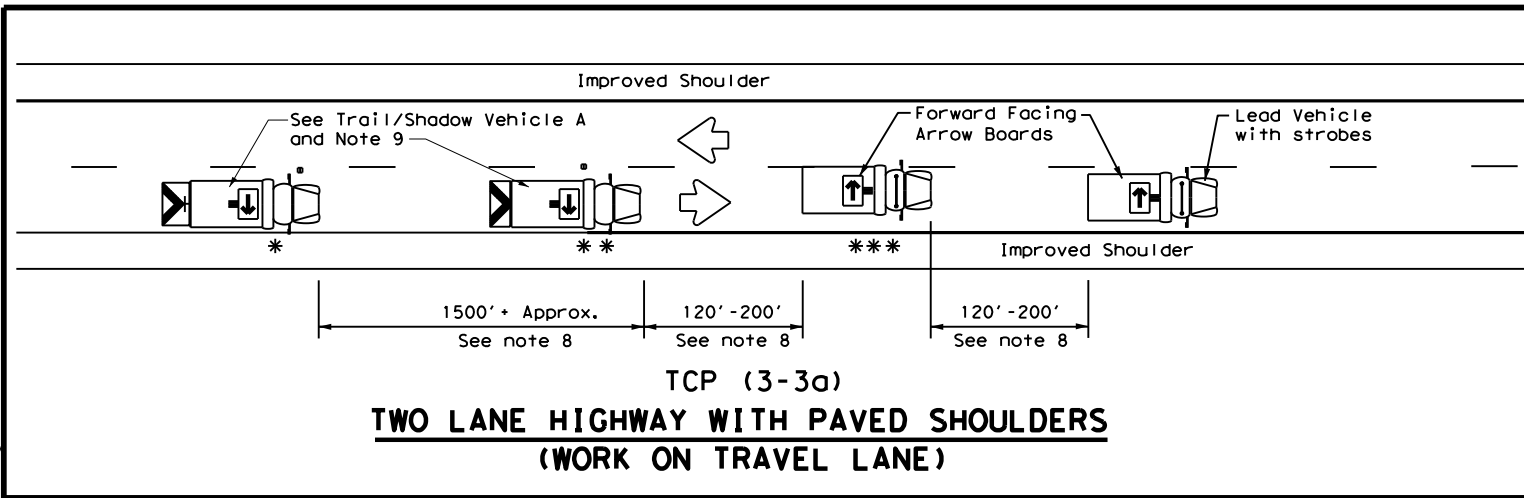


TCP (3-3a)
TWO LANE HIGHWAY WITH PAVED SHOULDERS
(WORK ON TRAVEL LANE)

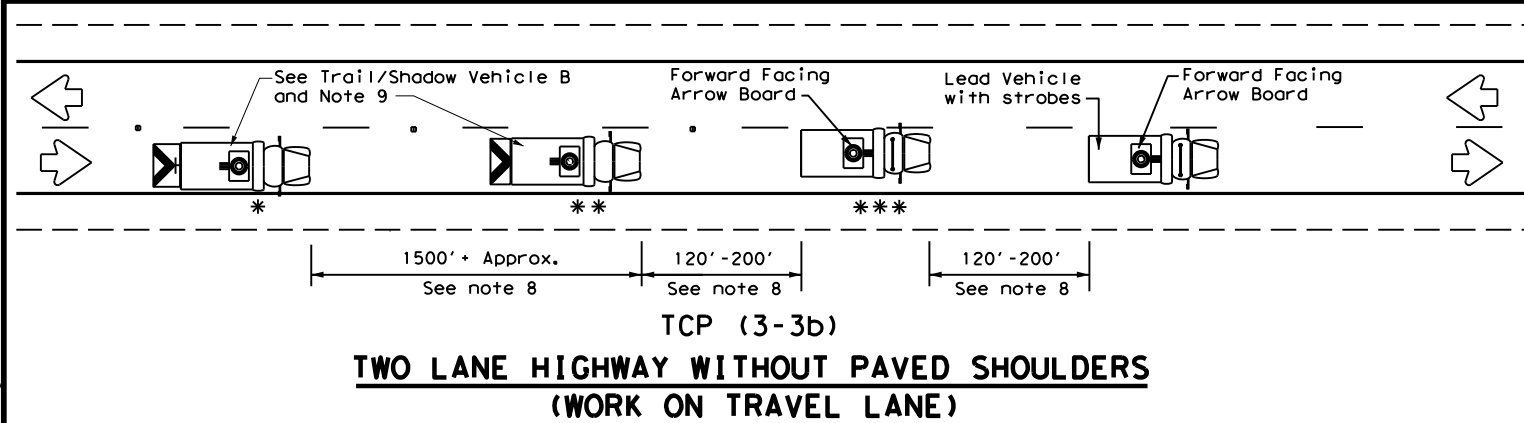


TCP (3-3b)
TWO LANE HIGHWAY WITHOUT PAVED SHOULDERS
(WORK ON TRAVEL LANE)

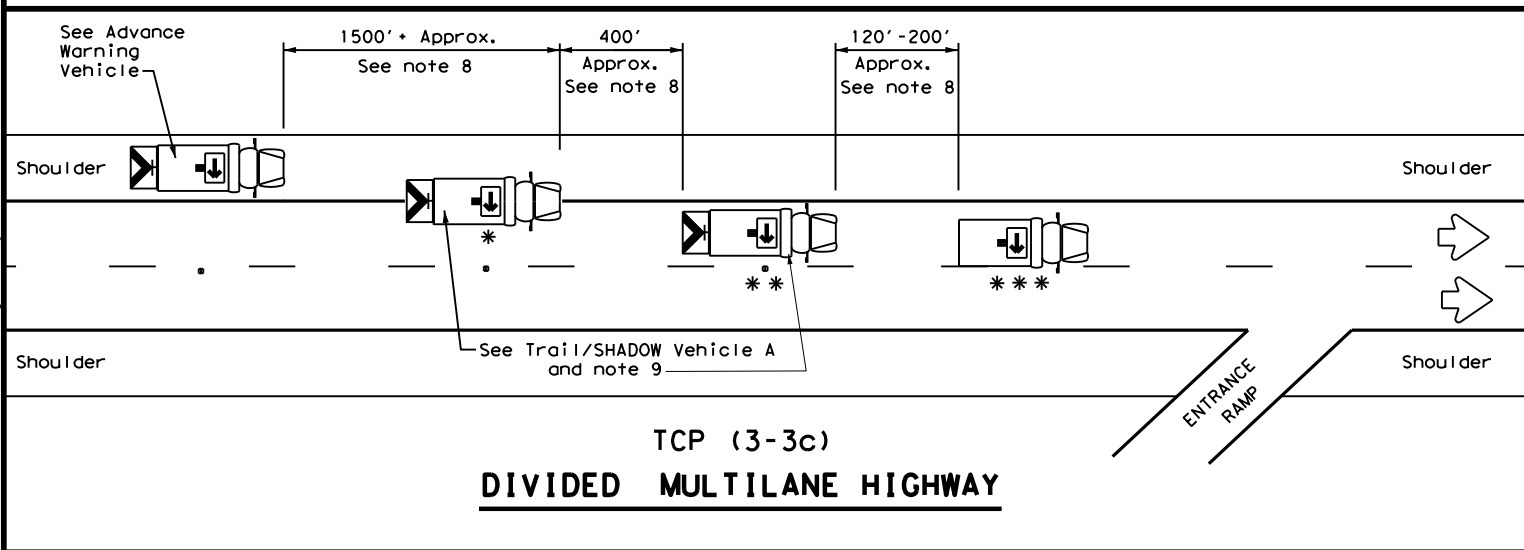


TCP (3-3c)
DIVIDED MULTILANE HIGHWAY

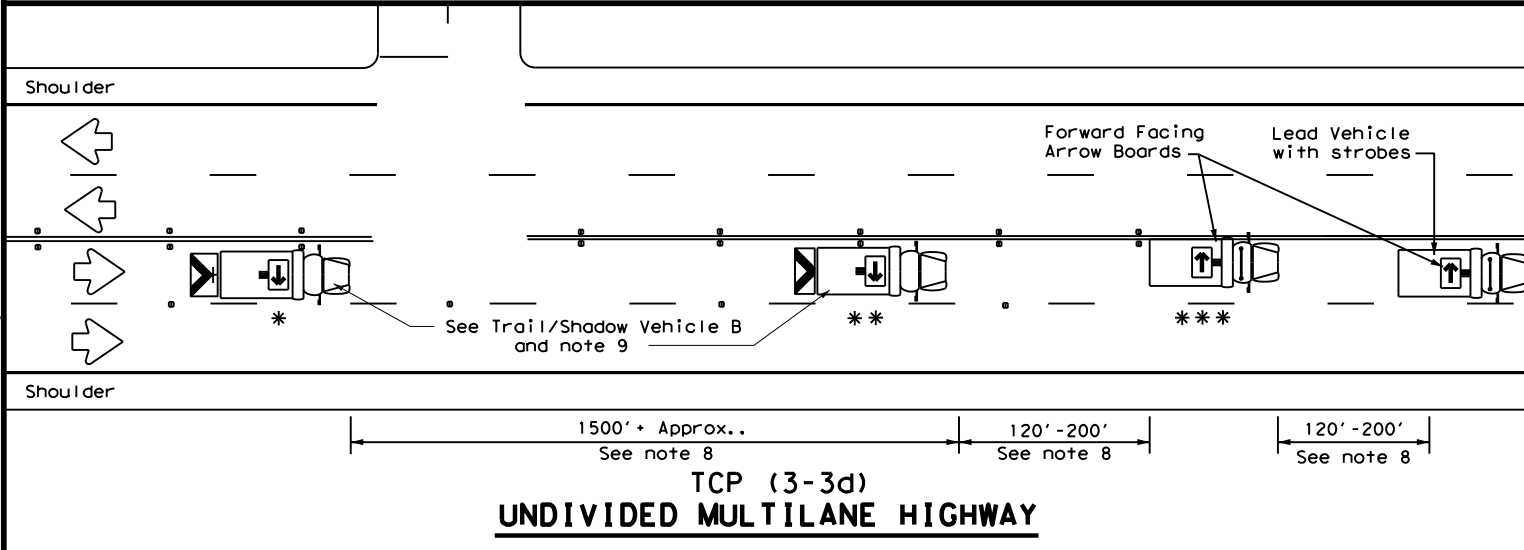


TCP (3-3d)
UNDIVIDED MULTILANE HIGHWAY

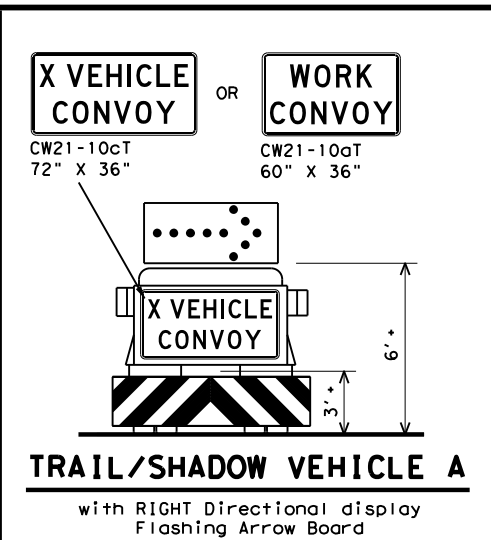


TRAIL/SHADOW VEHICLE A
 with RIGHT Directional display
 Flashing Arrow Board

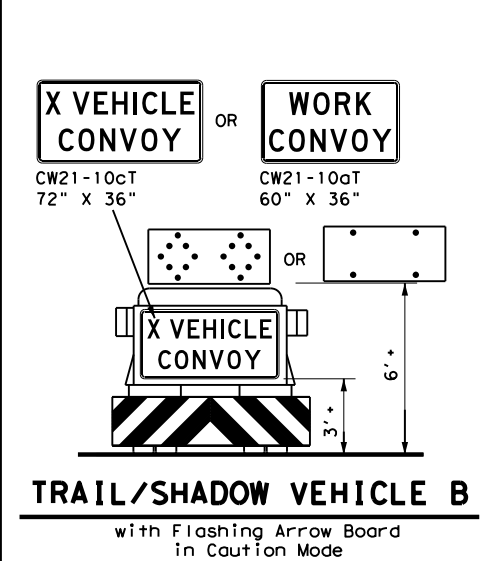

TRAIL/SHADOW VEHICLE B
 with Flashing Arrow Board
 in Caution Mode

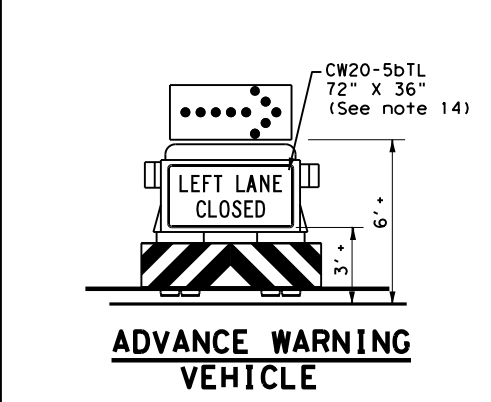

ADVANCE WARNING VEHICLE

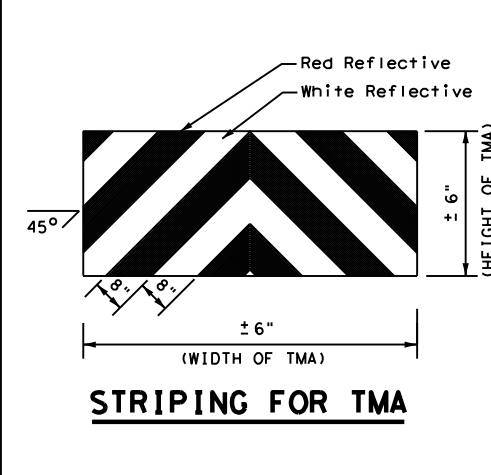

STRIPING FOR TMA

LEGEND		
* Trail Vehicle	ARROW BOARD DISPLAY	
** Shadow Vehicle		
*** Work Vehicle		RIGHT Directional
Heavy Work Vehicle		LEFT Directional
Truck Mounted Attenuator (TMA)		Double Arrow
Traffic Flow		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GENERAL NOTES

- TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
- The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING and TRAIL VEHICLE are required.
- Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
- Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
- Each vehicle shall have two-way radio communication capability.
- When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
- Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
- X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
- For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
- A double arrow shall not be displayed on the arrow board on the Advance Warning Vehicle.
- For divided highways with three or four lanes in each direction, use TCP(3-2).
- Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
- The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes it necessary.
- On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.



Texas Department of Transportation
 Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
RAISED PAVEMENT
MARKER INSTALLATION/REMOVAL
TCP (3-3) - 14

FILE: tcp3-3.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT September 1987	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 7-13	DAL	ELLIS	27	
1-97 7-14				

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 4/12/2022
 FILE: pw:\txdot\projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10. Miscellaneous\absorb\19.dgn

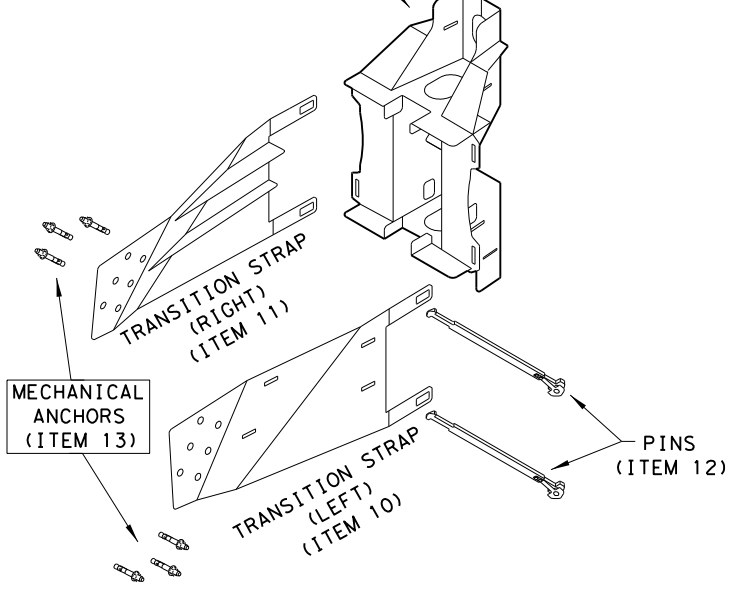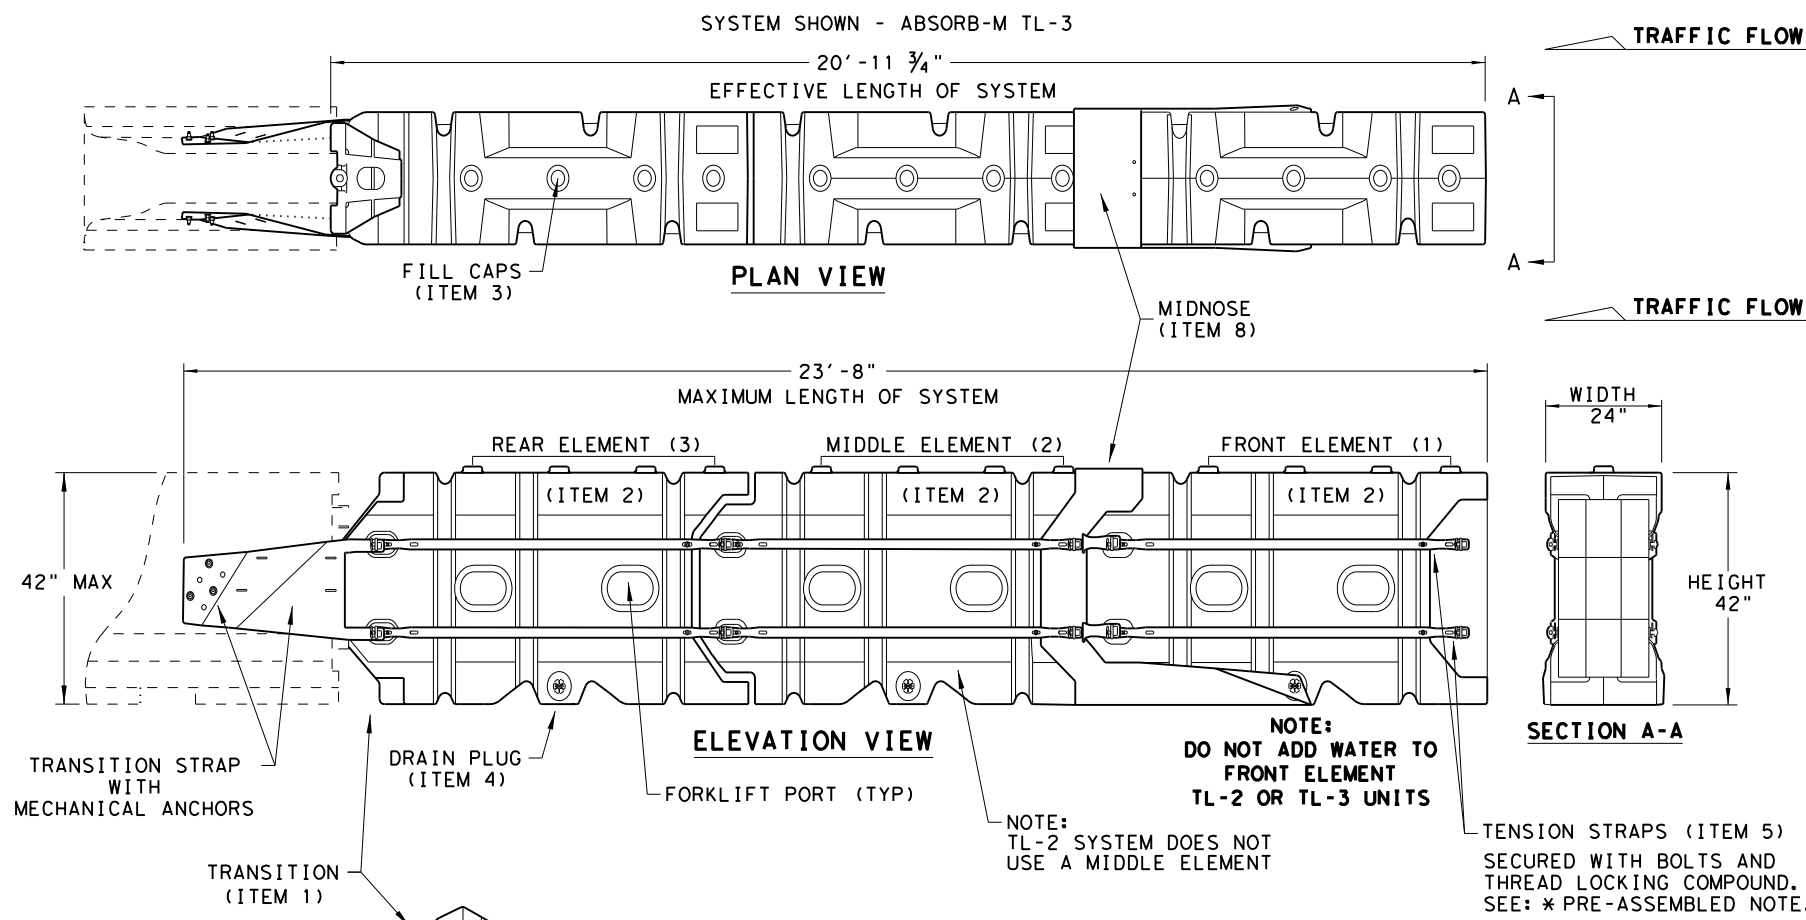


THE ABSORB-M IS A NON-REDIRECTIVE, GATING, CRASH CUSHION DESIGNED TO MEET THE LATEST TL-3 & TL-2 MASH REQUIREMENTS.

THE SYSTEM IS DESIGNED TO ACCOMMODATE A VARIETY OF F-SHAPE AND SINGLE SLOPE CONCRETE BARRIERS. CONTACT THE MANUFACTURER FOR GUIDANCE REGARDING OTHER ALLOWABLE SHAPES.

TEST LEVEL	NUMBER OF ELEMENTS	EFFECTIVE LENGTH	MAXIMUM LENGTH
TL-2	2	14' - 7 3/4"	17' - 4"
TL-3	3	20' - 11 3/4"	23' - 8"

NOTE: CROSS SLOPES OF UP TO 8% (OR 1:12 SLOPE) CAN BE ACCOMMODATED WITH STANDARD HARDWARE SHOWN WITHIN THE INSTRUCTIONS MANUAL. FOR SLOPES WITH EXCESS OF 8% (OR 1:12) CONTACT, LINDSAY TRANSPORTATION SOLUTIONS.

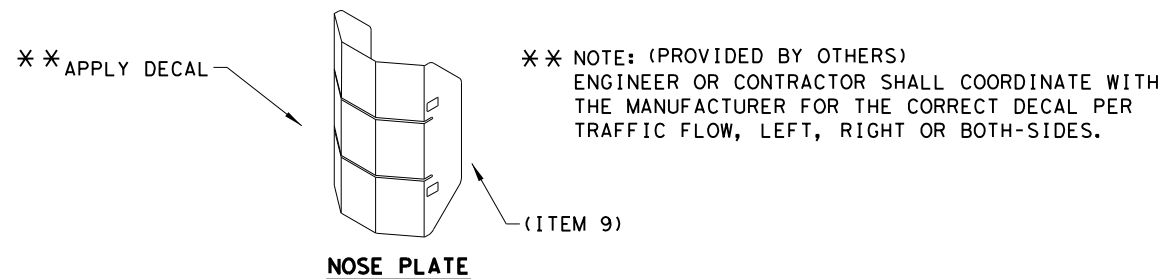


NOTE: APPLY A HIGH REFLECTIVE DECAL TO THE NOSE PLATE. DELINEATION DECAL ORIENTATION IS SHOWN ON THE CONSTRUCTION PLAN SET AND SHALL BE IN ACCORDANCE WITH THE TEXAS MUTCD FOR (TRAFFIC CONTROL DEVICES). DECALS ARE AVAILABLE FOR TRAFFIC FLOW ON THE LEFT-SIDE, BOTH -SIDES AND RIGHT-SIDE.

GENERAL NOTES

- FOR SPECIFIC INFORMATION REGARDING THE INSTALLATION AND TECHNICAL GUIDANCE, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800. 180 RIVER ROAD, RIO VISTA, CA 94571
- THE ABSORB-M SYSTEM IS ONLY APPROVED FOR USE IN (TEMPORARY WORK ZONE) LOCATIONS.
- THE ABSORB-M IS A WATER FILLED NON-REDIRECTIVE, GATING CRASH CUSHION THAT DOES NOT NEED TO BE ATTACHED TO A FOUNDATION AND CAN BE INSTALLED ON TOP OF CONCRETE, ASPHALT, OR ANY SURFACE CAPABLE OF BEARING THE WEIGHT OF THE SYSTEM.
- MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%.
- THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE ABSORB-M SHOULD BE LOCATED APPROXIMATELY PARALLEL WITH THE BARRIER.
- THE USE OF THE ABSORB-M IS RESTRICTED TO A BARRIER HEIGHT OF UP TO 42 INCHES.
- DO NOT ADD WATER TO FRONT ELEMENT (TL-2 OR TL-3 UNIT).

BILL OF MATERIALS (BOM) ABSORB-M TL-3 & TL-2 SYSTEMS			QTY	QTY
ITEM #	PART NUMBER	PART DESCRIPTION	TL-2 SYSTEM	TL-3 SYSTEM
1	BSI-1809036-00	TRANSITION-(GALV)	1	1
2	BSI-1808002-00	PRE-ASSEMBLED ABSORBING (ELEMENTS)	2	3
3	BSI-4004598	FILL CAPS	8	12
4	BSI-4004599	DRAIN PLUGS	2	3
5	BSI-1809053-00	TENSION STRAP-(GALV)	8	12
6	BSI-2001998	C-SCR FH 3/8-16 X 1 1/2 GR5 PLT	8	12
7	BSI-2001999	C-SCR FH 3/8-16 X 1 GR5 PLT	8	12
8	BSI-1809035-00	MIDNOSE-(GALV)	1	1
9	BSI-1808014-00	NOSE PLATE	1	1
10	BSI-1809037-00	TRANSITION STRAP (LEFT-HAND)-(GALV)	1	1
11	BSI-1809038-00	TRANSITION STRAP (RIGHT-HAND)-(GALV)	1	1
12	BSI-1808005-00	PIN ASSEMBLY	8	10
13	BSI-2002001	ANC MECH 5/8-11X5 (GALV)	6	6
14	ABSORB-M	INSTALLATION AND INSTRUCTIONS MANUAL	1	1

* COMPONENTS PRE-ASSEMBLED WITH ELEMENT ASSEMBLY

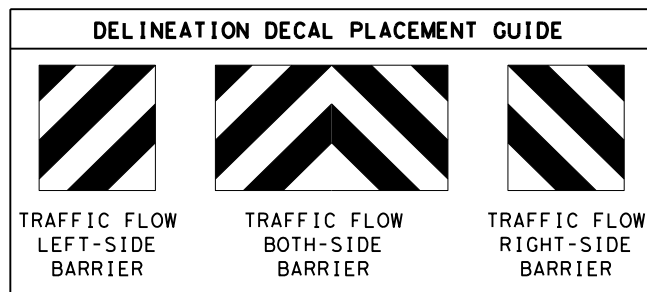


SACRIFICIAL


		Design Division Standard	
LINDSAY TRANSPORTATION SOLUTIONS CRASH CUSHION (MASH TL-3 & TL-2) TEMPORARY - WORK ZONE ABSORB (M) - 19			
FILE: absorbm19	DN: TxDOT	CK: KM	DW: VP
© TxDOT: JULY 2019	CONT SECT	JOB	HIGHWAY
REVISIONS	0568 01	059	SH 34
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	29	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 4/12/2022
 FILE: \\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10 - Miscellaneous\cccg21.dgn

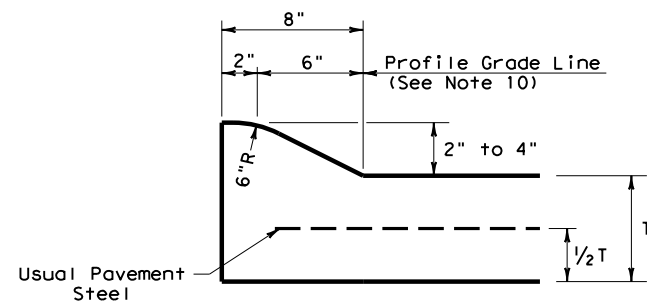


TYPE I CURB (MONOLITHIC)
 2" - 4" HEIGHT

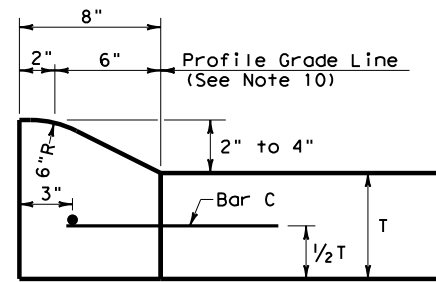


TYPE I CURB
 2" - 4" HEIGHT

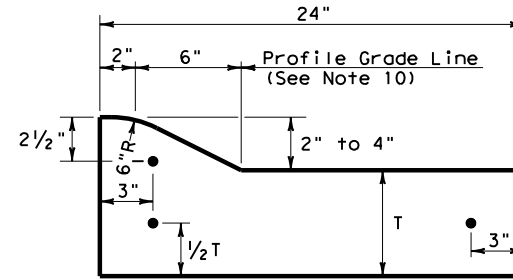


TYPE I CURB AND GUTTER
 2" - 4" HEIGHT

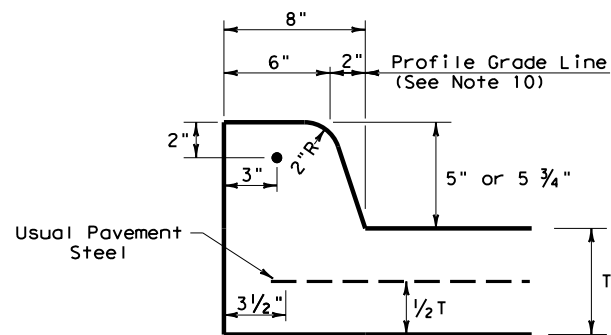


TYPE II CURB (MONOLITHIC)
 5" - 5 3/4" HEIGHT

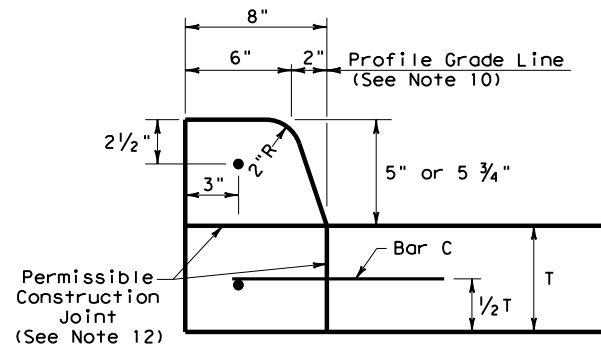


TYPE II CURB
 5" - 5 3/4" HEIGHT

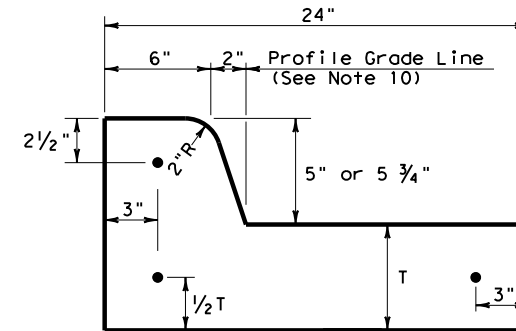


TYPE II CURB AND GUTTER
 5" - 5 3/4" HEIGHT

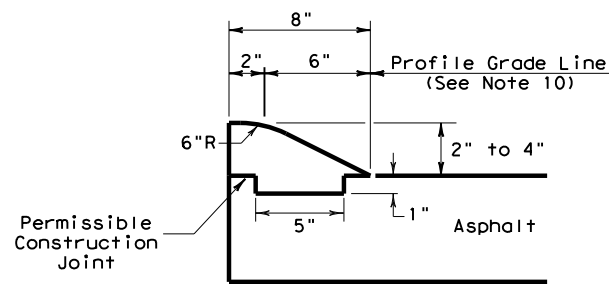


TYPE III CURB (KEYED)
 2" - 4" HEIGHT

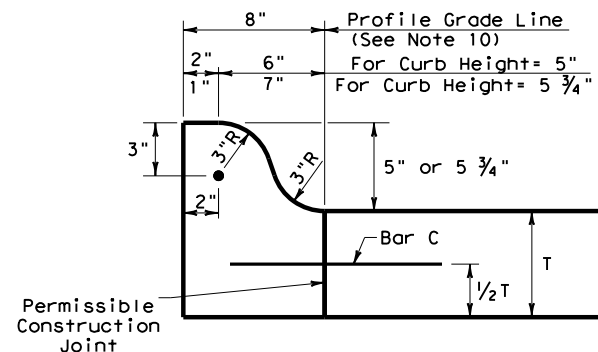


TYPE IIa CURB
 5" - 5 3/4" HEIGHT

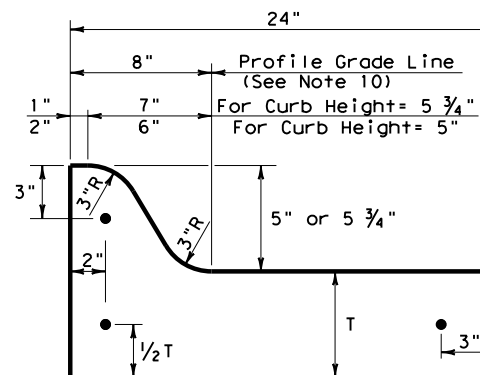


TYPE IIa CURB AND GUTTER
 5" - 5 3/4" HEIGHT

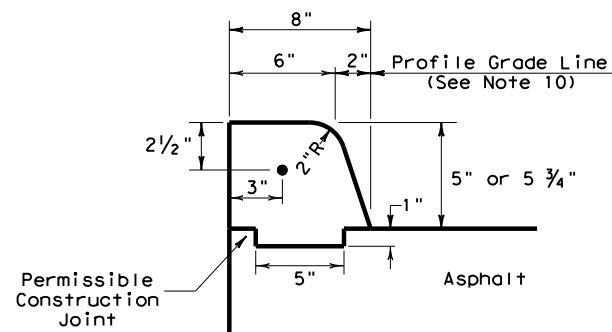

TYPE IV CURB (KEYED)
 5" - 5 3/4" HEIGHT

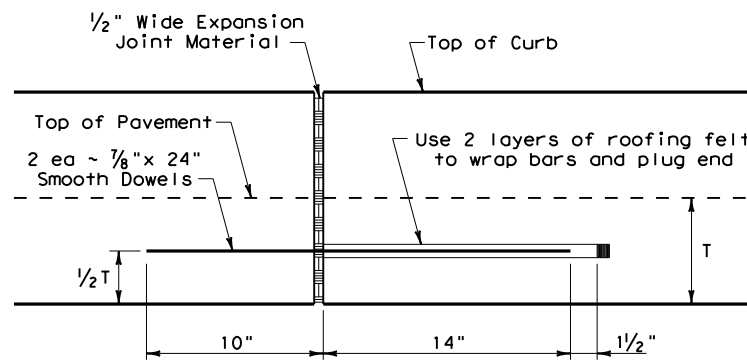


EXPANSION JOINT DETAIL

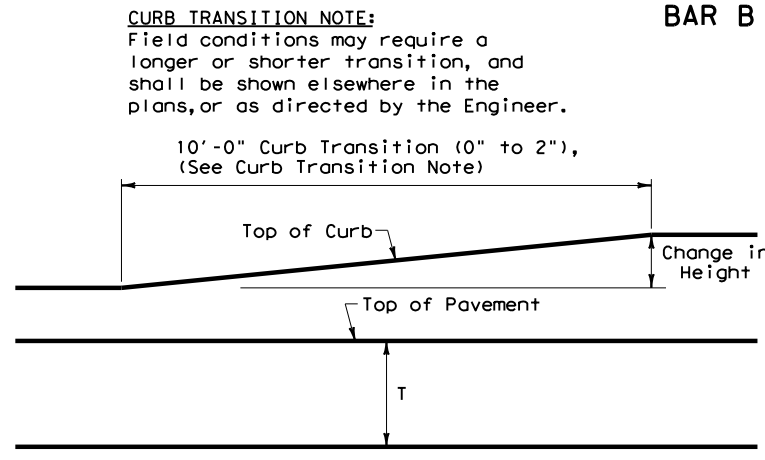

CURB TRANSITION
 Note: To be paid for as Highest Curb

GENERAL NOTES

- All materials and construction shall be in accordance with Item 529, "Concrete Curb, Gutter, and Combined Curb and Gutter."
- Concrete shall be Class A.
- When reinforcing bars are used, they shall be No.4 unless otherwise shown. The use of fiber reinforced concrete in lieu of reinforcing steel is acceptable. Use fibers meeting the requirements of DMS 4550, "Fibers for Concrete," and dose fibers in accordance with Material Producers List (MPL) "Fibers for Class A and B Concrete Applications."
- Round exposed sharp edges with a rounding tool, to a minimum radius of 1/4 inch.
- All existing curbs and driveways to be removed shall be sawed or removed at existing joints.
- Where concrete curb is to be placed on existing concrete pavement, Bar B may be drilled and the grouted in place, or may be inserted into fresh concrete.
- Expansion and contraction joints shall be constructed to match pavement joints in all curbs and curb and gutter adjacent to jointed concrete pavement. Where placement of curb or curb and gutter is not adjacent to concrete pavement, expansion joints shall be provided at structures, curb returns at streets, and at locations directed by The Engineer.
- Vertical and horizontal dowel bars and transverse reinforcing bars shall be placed at four feet C-C.
- Dimension 'T' shown is the thickness of concrete pavement. When curb is installed adjacent to flexible pavement dimension 'T' is 8" maximum.
- Usual profile grade line. Refer to typical sections and plan-profile sheets for exact locations.
- One-half inch expansion joint material shall be provided where curb or curb and gutter is adjacent to sidewalk or riprap.
- When horizontal permissible construction joints are used, the longitudinal pavement steel shall be placed in accordance with pavement details shown elsewhere in the plans. Reinforcing steel for curb section shall then conform to that required for concrete curb.
- Bar B used as needed to support curb reinforcing steel during concrete placement.

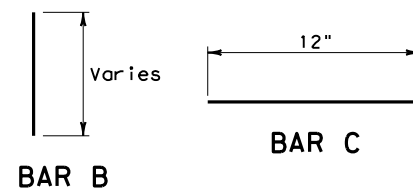


CURB TRANSITION NOTE:
 Field conditions may require a longer or shorter transition, and shall be shown elsewhere in the plans, or as directed by the Engineer.


		Design Division Standard	
CONCRETE CURB AND GUTTER			
CCCG-21			
FILE: cccg21.dgn	DN: TXDOT	CK: AN	DW: SS
©TXDOT: FEBRUARY 2021	CONT	SECT	JOB
REVISIONS	0568	01	059
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	30	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 03/22/2022 3:02:29 AM
 FILE: D:\Design\Projects\056801059\4 - Design\Plan Set\10 - Miscellaneous\csb110.dgn

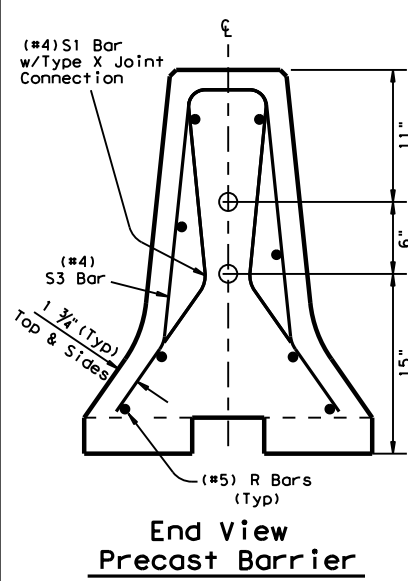


End View Precast Barrier
 See sheet 2 of 3 for Joint connection Type X

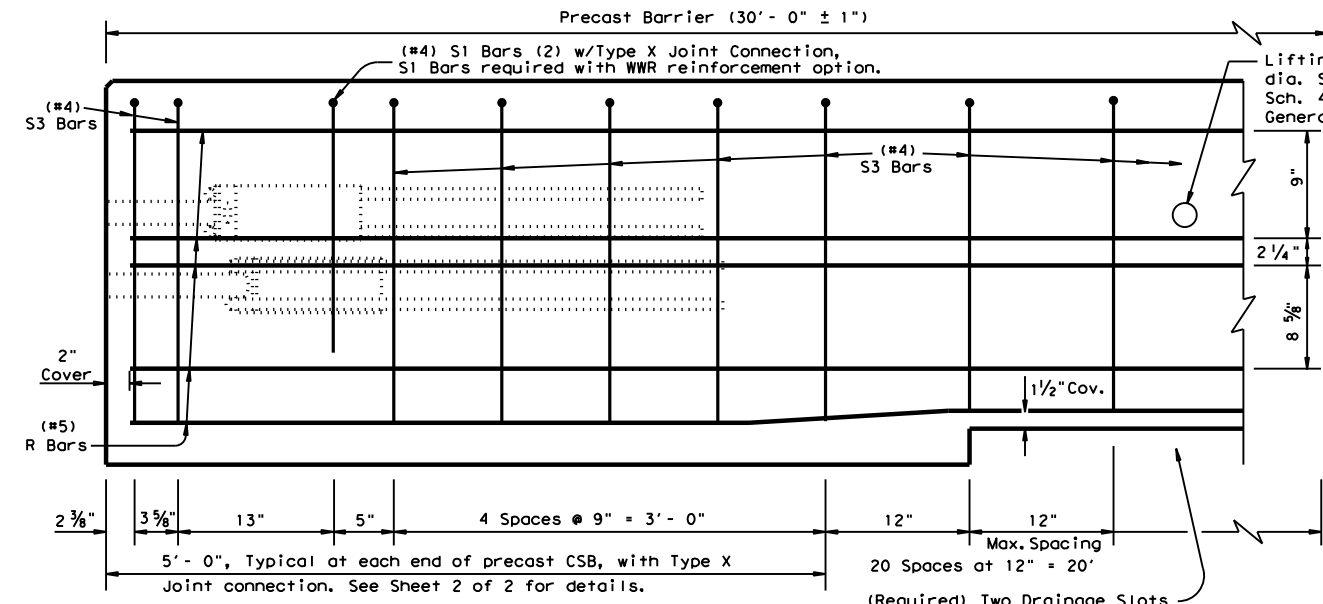


Reinforcement for Precast (CSB) Concrete Safety Barrier (Type 1)
 Showing reinforcement for Joint Type X

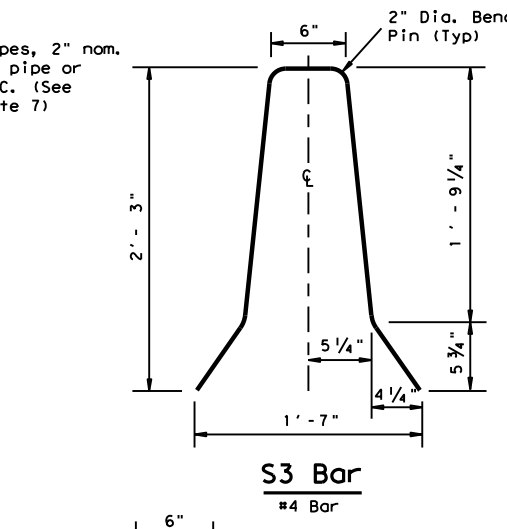

S3 Bar
 #4 Bar

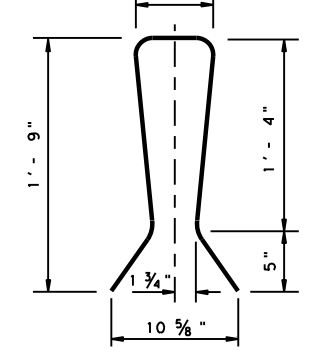

S1 Bar
 #4 Bar (2)
 (Joint Type X)

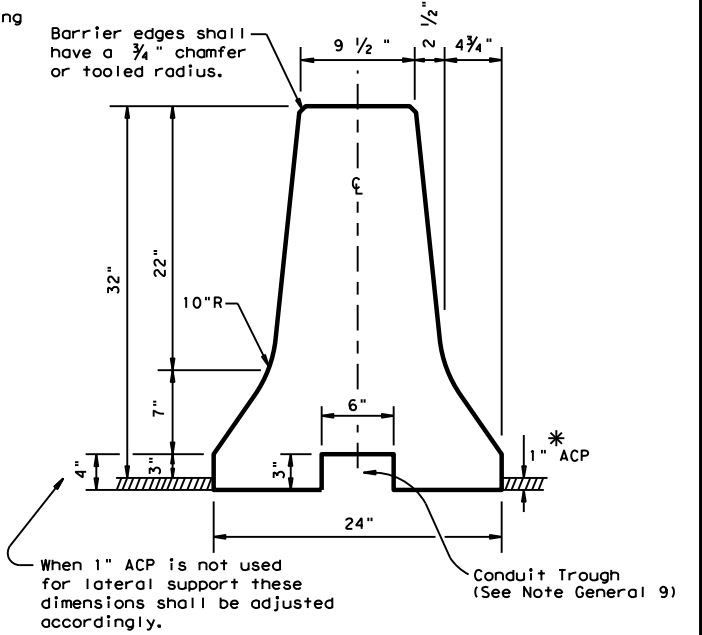


Concrete Safety Barrier


* When 1" ACP is "not" used as lateral support for permanent barrier placement. A permissible method of attaining the equivalent lateral support may be used, See CSB(6) sheet.

GENERAL NOTES


- Concrete shall be Class H with a minimum compressive strength of 3,600 psi.
- Where used, rebar reinforcement shall be Grade 60 and conform to ASTM A615.
- Precast barrier length shall be 30 ft. unless otherwise specified on the plans.
- All precast barrier edges shall have a 3/4" chamfer or tooled radius.
- All concrete, reinforcement, joint connection systems, grout etc. as shown, are considered as part of the barrier payment.
- All steel assemblies for joint shall be galvanized after fabrication in accordance with Item 445, "Galvanizing."
- Regardless of the method of handling, barrier lifting points shall be approx. 7.5 feet from the ends of the barrier. Lifting devices and attachments to barrier sections shall be approved by the Engineer.
- Surface finishing and grouting (where required) shall be two parts sand one part cement with enough water to make the mixture plastic. Grouting shall be done in a manner that will assure a smooth surface. Surface finishing shall be considered subsidiary to the various bid items involved.
- Conduit trough when required shall be shown elsewhere on the plans, or as directed by the Engineer.

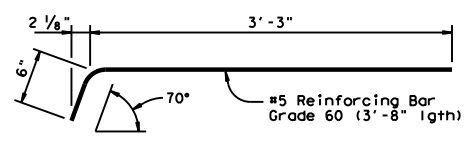


DEFORMED BAR ANCHOR DETAILS
 Two (2) Bars required per assembly. Eight (8) required per joint.

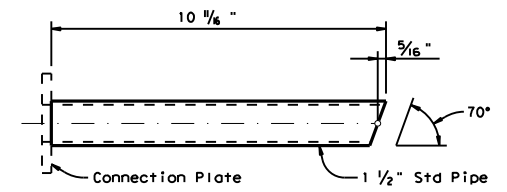

UPPER CONNECTION PIPE DETAILS
 One (1) Steel Pipe required per Upper Assembly. Two (2) required per joint.

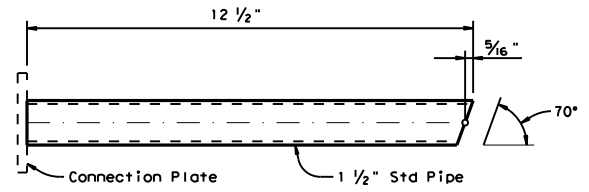

LOWER CONNECTION PIPE DETAILS
 One (1) Steel Pipe required per Lower Assembly. Two (2) required per joint.

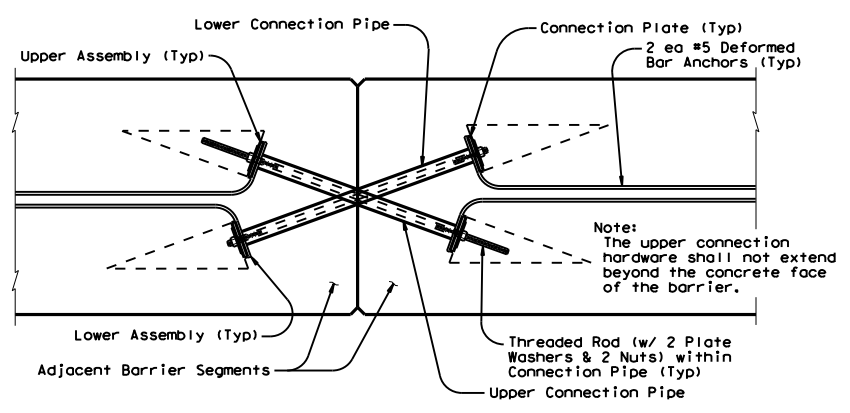

TYPE X JOINT INSTALLATION DETAIL

Barrier reinforcing and Type X Joint Leave-Out dimensions not shown for clarity.



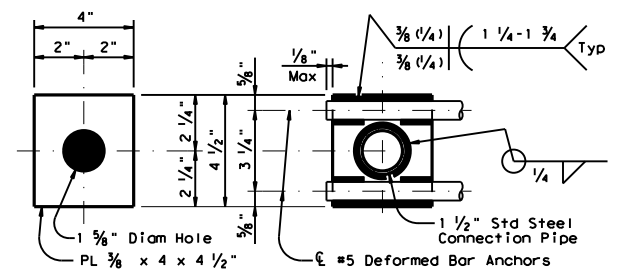


PLATE DIMENSIONS WELDING DETAILS

CONNECTION PLATE DETAILS
 One (1) Plate required per assembly. Four (4) required per joint. All steel fittings for joint Type X shall be galvanized after fabrication in accordance with Item 445.

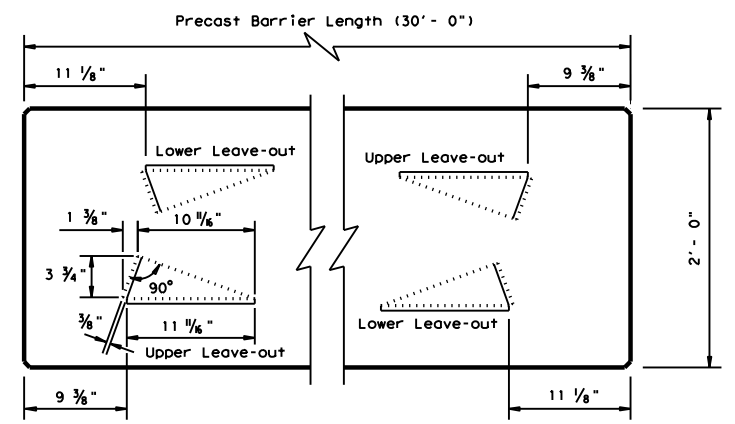


BARRIER PLAN AT END JOINTS

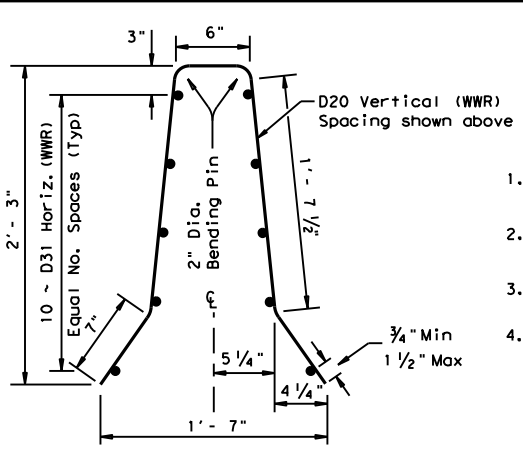

Welded Wire Reinforcement (WWR) Option for Bars R and S3
 (WWR) General Notes


- Deformed Welded Wire Reinforcement (WWR) shall conform to ASTM A497.
- Welded wire cage may be cut or bent to accommodate the Type X joint connection and drainage slots, as directed by the Engineer.
- All reinforcement shall comply with Item 440, "Reinforcing Steel."
- Combinations of reinforcing steel and WWR will be permitted, as directed by the Engineer. The dimension from the end of the barrier section to the first wire shall not exceed 3".

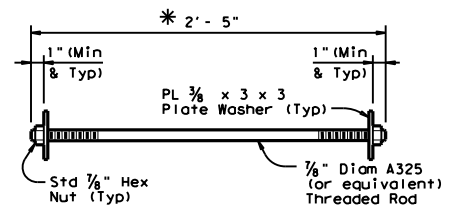

CONNECTION BOLT OR THREADED ROD DETAIL

Two (2) Threaded Rods (or Equivalent Hex Hd. Bolts) (w/ Two (2) PL 3/8 x 3 x 3 Plate Washers & Two (2) Std Hex Nuts) required per joint.

* The connection hardware shall not extend beyond the concrete face of the barrier. Hex head bolts may be provided. The proper length of all hardware should be verified.

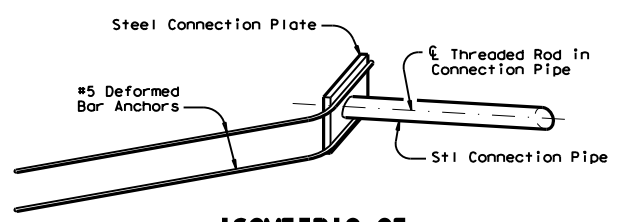

ISOMETRIC OF TYPICAL WELDED ASSEMBLY


Four (4) [2 Upper & 2 Lower] Assemblies required per joint.

Weight of one Precast 30 ft. (CSB) segment = Approx. 6.5 Tons or 440 lbs per ft.


		Design Division Standard	
CONCRETE SAFETY BARRIER (F-SHAPE) PRECAST BARRIER (TYPE 1) CSB(1)-10			
FILE: csb110.dgn	DN: TxDOT	CK: AM	DW: BD
© TxDOT December 2010	CONT: 0568	SECT: 01	JOB: 059
REVISIONS			SH: 34
DIST: DAL	COUNTY: ELLIS	SHEET NO.: 31	

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 03/02/2022 3:00:29 AM
 FILE: DOCUMENT\PROJECT\wiseonline.com:TXDOTS\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10. Miscellaneous\csb110.dgn

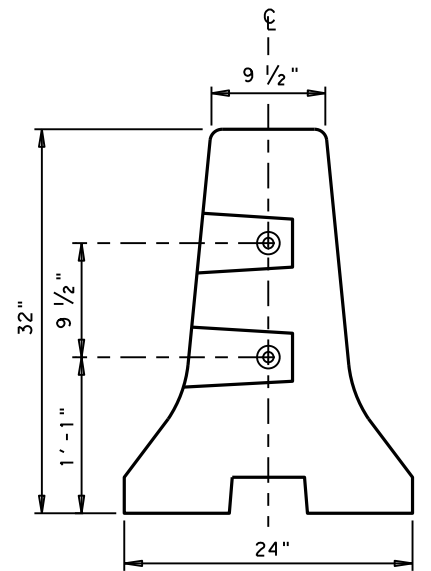

END VIEW (CSB) QUICK-BOLT
 QUICK-BOLT POCKET LOCATIONS

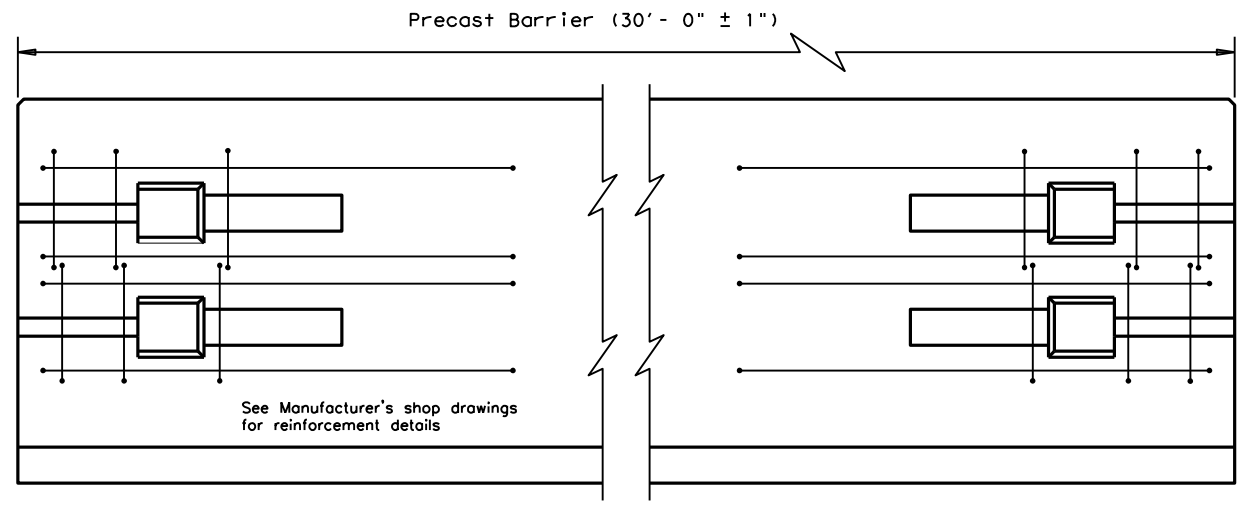


ELEVATION (CSB) QUICK-BOLT
 See Manufacturer's shop drawing for additional details

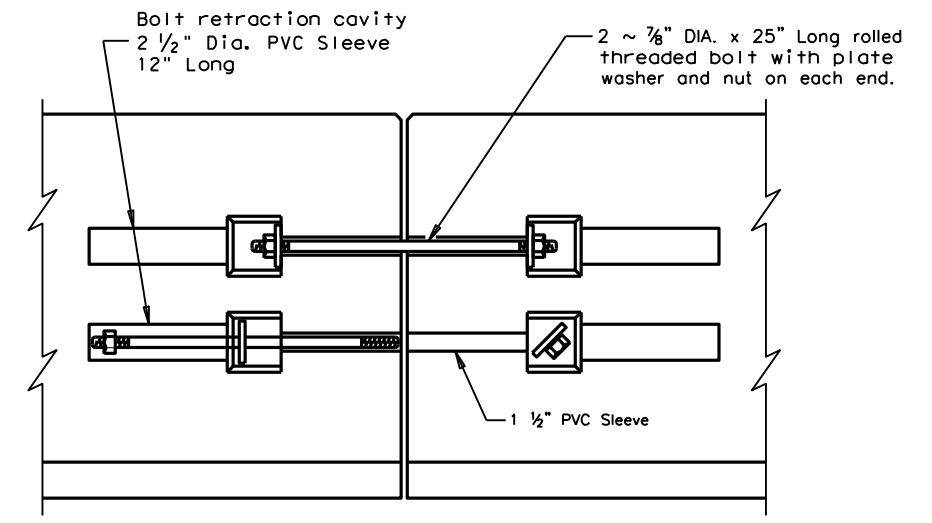


ELEVATION VIEW SHOWING JOINT CONNECTION
"QUICK-BOLT"

Joint Connection (Type Q)

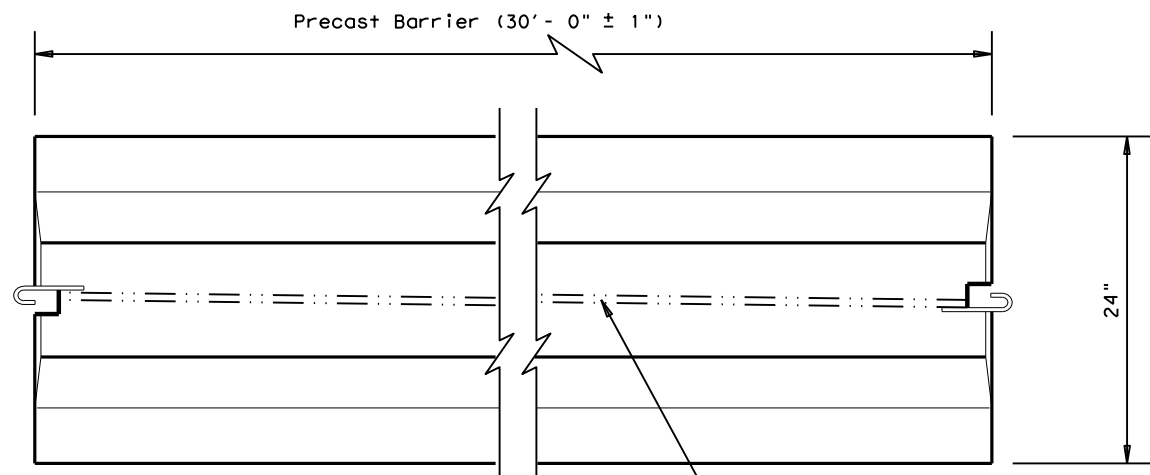


TOP VIEW
PRECAST (CSB) WITH J-J HOOKS
 See Manufacturer's shop drawing for additional details

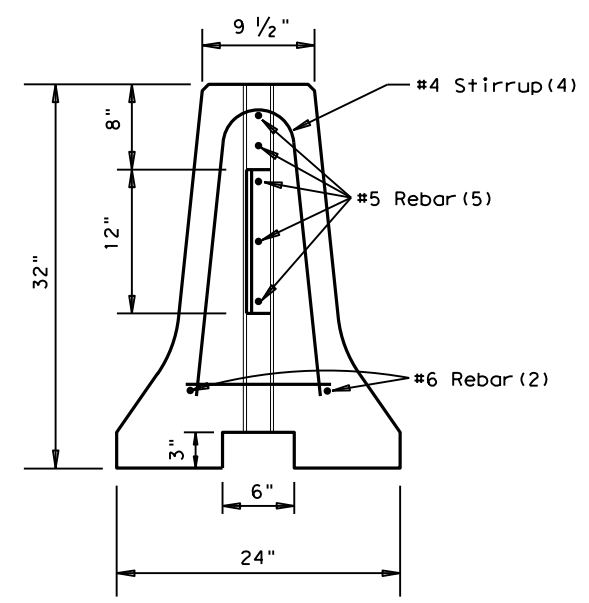

END VIEW
J-J HOOK CONNECTION

Joint Connection (Type J)

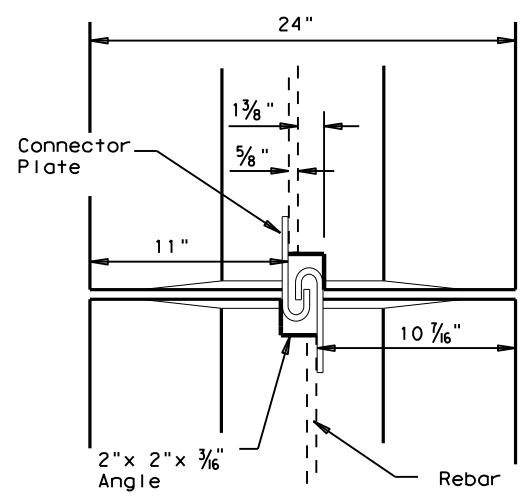

VIEW FROM ABOVE
J-J HOOK CONNECTION

Proprietary Joint Connections (CSB)

Two proprietary joint connections are acceptable as alternates to the (Type X) connection shown, here on. These joint connections types are:


J-J Hooks by Easi-Set Industries, (800)547-4045
 Quick-Bolt by Bexar Concrete, (210)497-3773

If one of these connection systems are exclusively specified in the plans, prior approval for sole source use must be obtained. Details of the connection components and barrier reinforcement for these systems, will be shown on the manufacturer's shop drawing(s) furnished to the Engineer.


SHEET 2 OF 2

		Design Division Standard	
CONCRETE SAFETY BARRIER (F-SHAPE) PRECAST BARRIER (TYPE 1) CSB(1)-10			
FILE: csb110.dgn	DN: TxDOT	CK: AM	DW: BD
© TxDOT December 2010	CONT: 0568	SECT: 01	JOB: 059
REVISIONS			HIGHWAY: SH 34
DIST: DAL	COUNTY: ELLIS	SHEET NO.: 32	

DATE: 4/12/2022
 FILE: \\txdot.projectwiseonline.com\txdot\Documents\18 - DAL\Design Projects\0568010594 - Design\Plan Set\10. Miscellaneous\gf3119.dgn
 DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

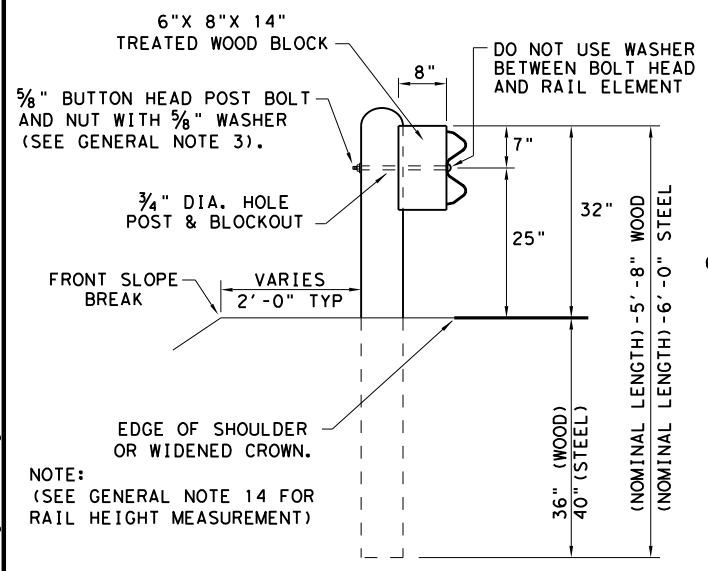


TYPICAL POST PLACEMENT

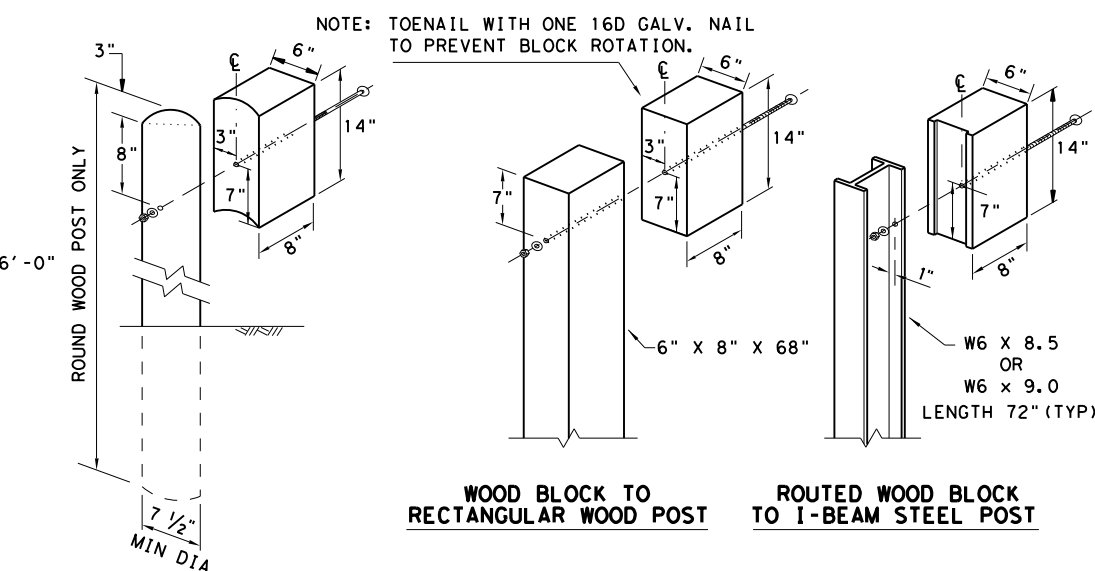

WOOD BLOCK TO ROUND WOOD POST **ROUTED WOOD BLOCK TO I-BEAM STEEL POST**


GENERAL NOTES

1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE DOWNSTREAM ANCHOR TERMINAL (DAT) AND THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/8" WASHER (FWC16G) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. UNLESS OTHERWISE SHOWN IN THE PLANS, GUARD FENCE PLACED IN THE VICINITY OF CURBS SHALL BE POSITIONED SO THAT THE FACE OF CURB IS LOCATED DIRECTLY BELOW OR BEHIND THE FACE OF THE RAIL. RAIL PLACED OVER CURBS SHALL BE INSTALLED SO THAT THE POST BOLT IS LOCATED APPROXIMATELY 25 INCHES ABOVE THE GUTTER PAN OR EDGE OF SHOULDER.
9. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. IF SOLID ROCK IS ENCOUNTERED WITHIN 0 TO 18" OF THE FINISHED GRADE, DRILL A 24" DIA. HOLE, 24" INTO THE ROCK. IF SOLID ROCK IS ENCOUNTERED BELOW 18", DRILL A 12" DIA. HOLE, 12" INTO THE ROCK OR TO THE STANDARD EMBEDMENT DEPTH, WHICHEVER MAYBE LESS. ANY EXCESS POST LENGTH, AFTER MEETING THESE DEPTHS, MAY BE FIELD CUT TO ENSURE PROPER GUARDRAIL MOUNTING HEIGHT. BACKFILL WITH COARSE AGGREGATE MATERIAL.
10. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
11. SPECIAL FABRICATION WILL BE REQUIRED AT INSTALLATION LOCATIONS HAVING A CURVATURE OF LESS THAN 150 FT. RADIUS.
12. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TXDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210 ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
13. FOR THE LOW FILL CULVERT OPTION, POSTS LOCATED PARTIALLY OR WHOLLY BETWEEN PRECAST BOX CULVERT UNITS, THE USE OF A CAST-IN-PLACE CONCRETE CLOSURE BETWEEN BOXES IS REQUIRED. THE LENGTH OF THE CAST-IN-PLACE CONCRETE CLOSURE SHALL ACCOMMODATE THE PLACEMENT OF THE LOW FILL CULVERT OPTION. SEE CONCRETE CLOSURE DETAILS ON BRIDGE STANDARD SCP-MD.
14. GUARDRAIL HEIGHT MEASUREMENT: WHEN THE GUARDRAIL IS LOCATED ABOVE PAVEMENT, MEASURE THE HEIGHT FROM THE PAVEMENT TO THE TOP OF THE W-BEAM RAIL. WHEN THE GUARDRAIL IS LOCATED UP TO 2 FT. OFF OF THE EDGE OF PAVEMENT OR FOR A PAVEMENT OVERLAY, USE A 10-FOOT STRAIGHTEDGE TO EXTEND THE PAVEMENT/SHOULDER SLOPE TO THE BACK OF RAIL, MEASURE FROM THE BOTTOM OF STRAIGHTEDGE TO THE TOP OF RAIL. FOR GUARDRAIL LOCATED DOWN A 10:1 SLOPE, MEASURE FROM THE NOMINAL TERRAIN.

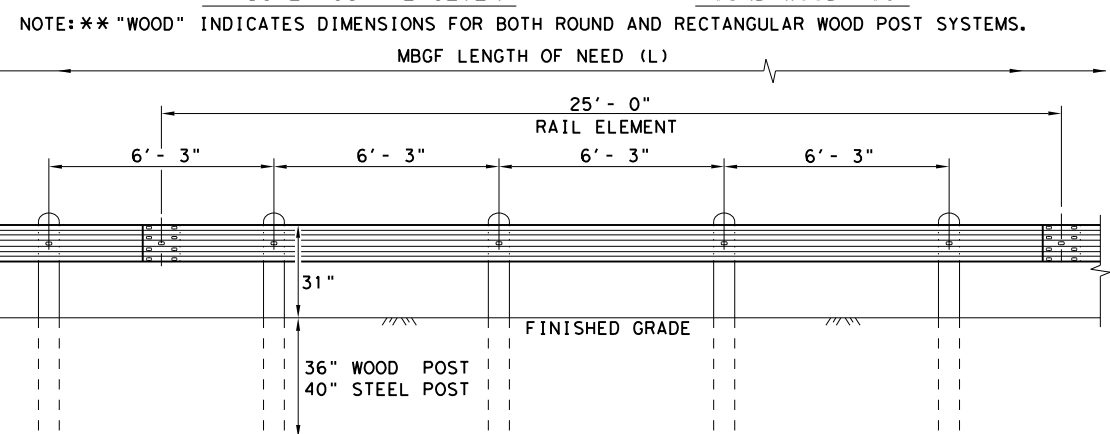

ELEVATION MID-SPAN RAIL SPLICE


SHOWING A 25'-0" SECTION OF W-BEAM RAIL. (SEE GENERAL NOTE 2)

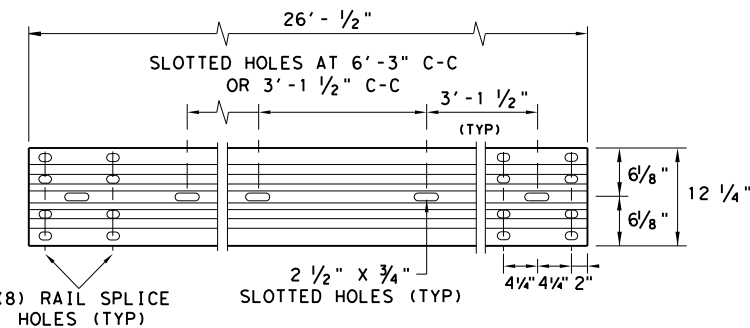

ELEVATION 25'-0" (NOM.) W-BEAM SECTION

NOTES: SEE GENERAL NOTE 2 FOR ALLOWABLE RAIL TYPES. SEE RAIL SPLICE DETAIL FOR REQUIRED HARDWARE.


* POST(S) MAY REQUIRE FIELD MODIFICATION TO ENSURE PROPER GUARDRAIL HEIGHT.

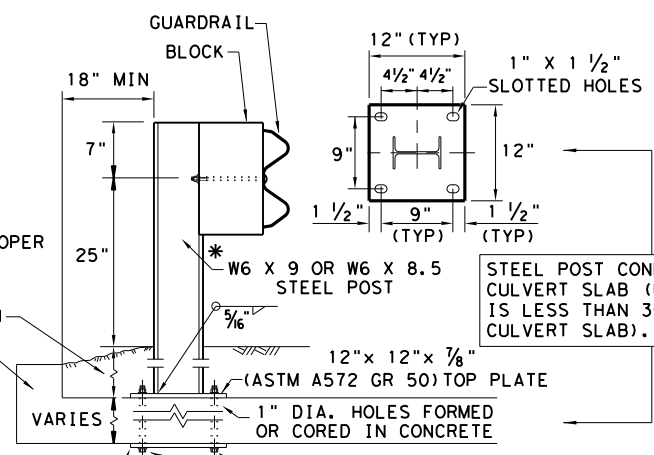

LOW FILL CULVERT POST


- NOTE: TWO INSTALLATION OPTIONS.
1. **BOLT-THROUGH OPTION:** REQUIRES A 6" MIN. SLAB THICKNESS. 7/8" DIA (ASTM A449) HEAVY HEX BOLTS WITH TWO HARDENED WASHER EACH AND HEAVY HEX NUTS. NOTE: BOLT LENGTH = SLAB PLUS 2 1/4" MIN.
 2. **EPOXY ANCHOR OPTION:** THIS OPTION MAY ONLY BE USED IF THE CULVERT SLAB IS 9" MIN. THICK. THREADED ANCHOR RODS MUST BE 7/8" DIA. ASTM A449 OR A193 GRADE B7 WITH HEAVY HEX NUT, AND ONE HARDENED WASHER EACH. EMBED ANCHOR RODS 6" WITH HILTI HIT RE 500 EPOXY ADHESIVE. OTHER TYPE III CLASS C EPOXY ADHESIVES MEETING THE REQUIREMENTS OF DMS-6100, "EPOXIES AND ADHESIVES", MAY BE USED IF IT CAN BE DEMONSTRATED THAT THEY MEET OR EXCEED THE STRENGTH OF HILTI HIT RE 500 WITH THE SAME EMBEDMENT DEPTH AND THREADED ROD DIA. FOLLOW THE MANUFACTURER'S REQUIREMENTS FOR INSTALLING EPOXIED THREADED RODS. EXTEND RODS 1/4" MIN. BEYOND NUT.

NOTE: CULVERTS OF 25 FT. OR LESS, SEE GF(31)LS STANDARD FOR "LONG SPAN" OPTION.

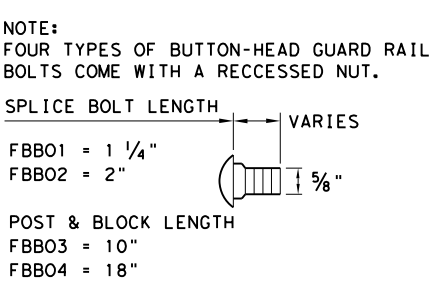

BUTTON HEAD BOLT

NOTE: SEE GENERAL NOTE 3 FOR SPLICE & POST BOLT DETAILS.

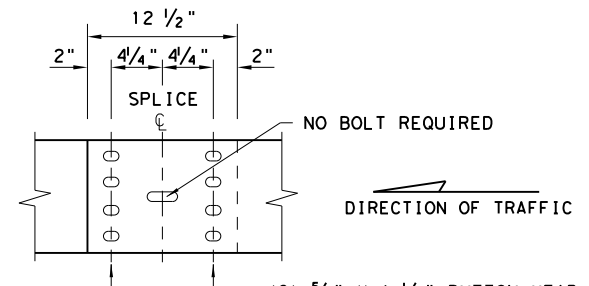


MID-SPAN RAIL SPLICE DETAIL

NOTE: GF(31), MID-SPAN RAIL SPLICES ARE REQUIRED WITH 6'-3" POST SPACINGS.


				Design Division Standard
METAL BEAM GUARD FENCE TL-3 MASH COMPLIANT GF(31)-19				
FILE: gf3119.dgn	DN: TxDOT	CK: KM	DW: VP	CK: CGL/AG
© TXDOT: NOVEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
DIST	COUNTY	SHEET NO.		
DAL	ELLIS	33		

DATE: 4/12/2022
 FILE: \\txdot.projectwiseonline.com\TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10_Miscellaneous\gf31ms19.dgn
 DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

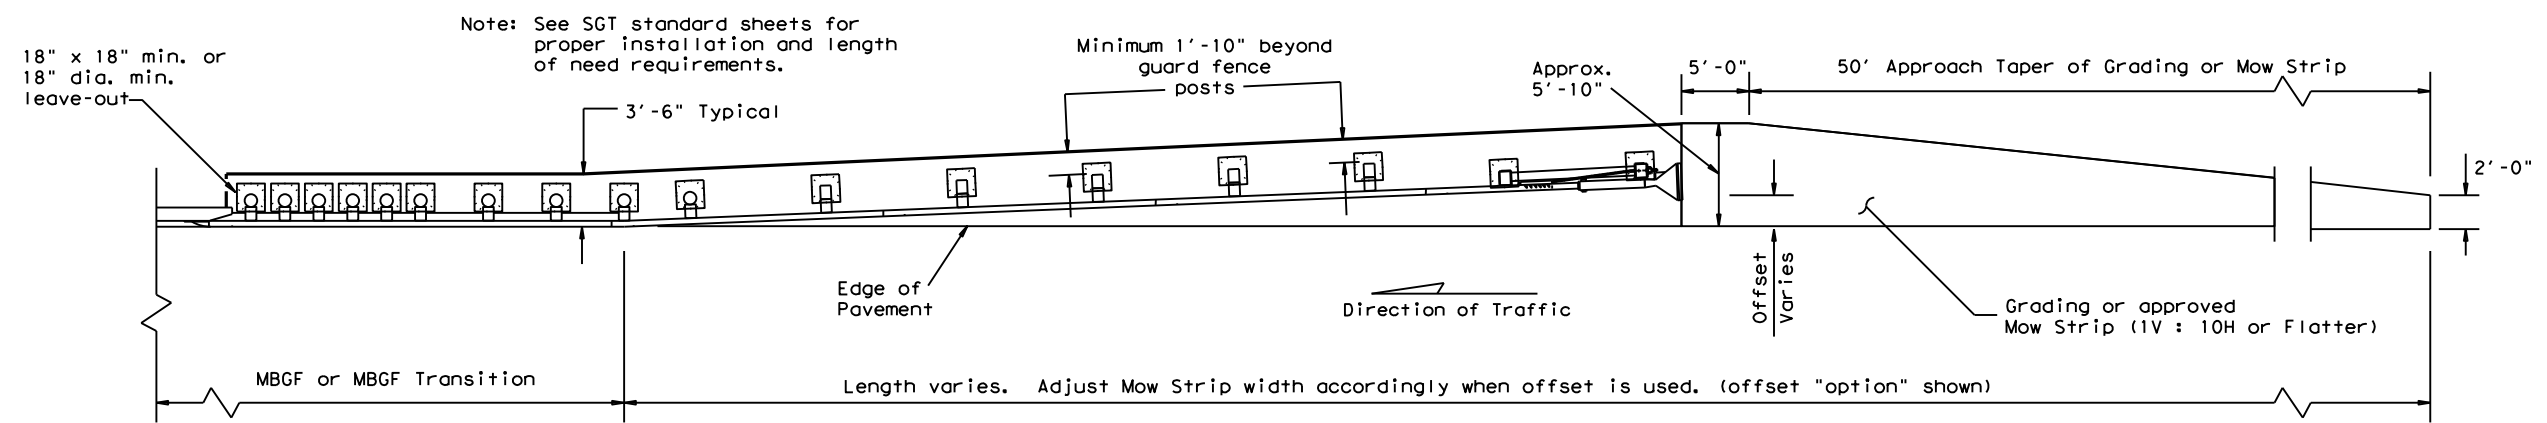


GRADING AND MOW STRIP AT GUARDRAIL END TREATMENTS

Note: Site Condition(s)
 Site conditions may exist where grading is required for the proper installation of metal guard fence and end treatments.
 Approach grading or mow strip may be decreased or eliminated, as directed by the Engineer.

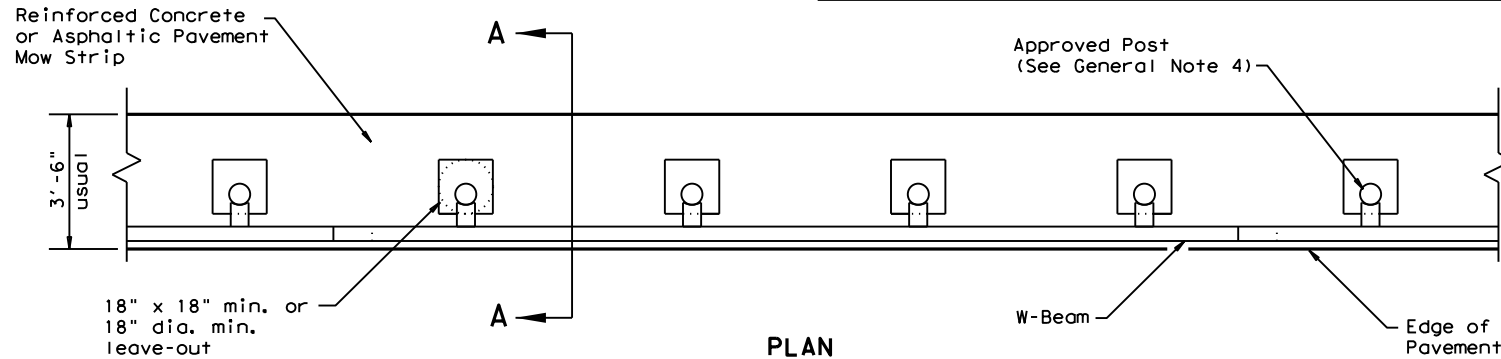


PLAN

GF(31) shown with Mow Strip
 (See GF(31) standard sheet for proper installation)

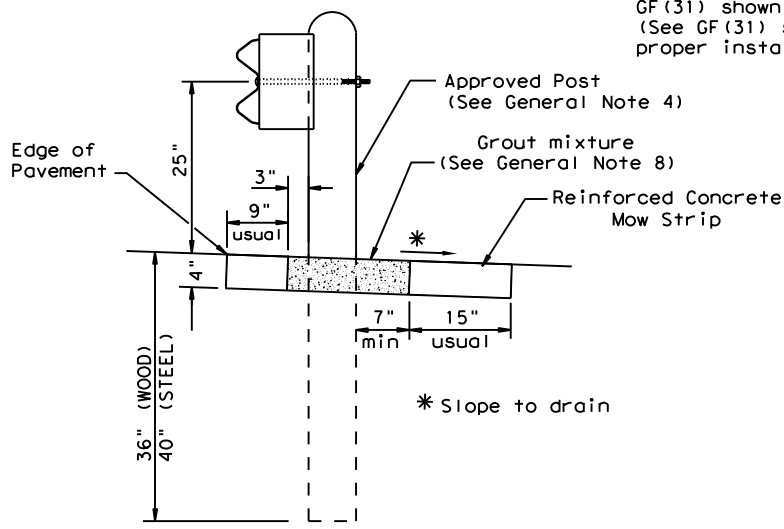

SECTION A-A


Typical

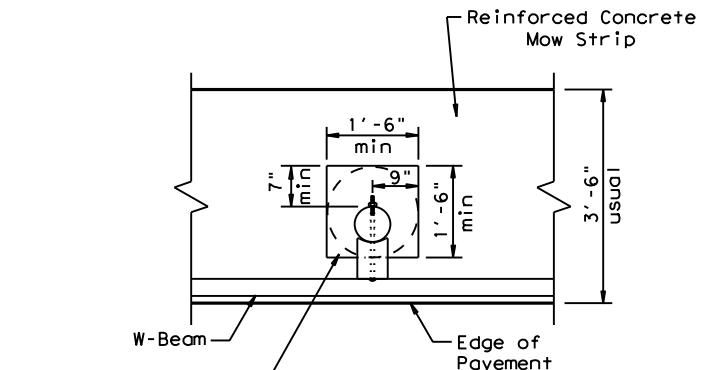

MOW STRIP DETAIL


Reinforced Concrete Mow Strip with 18" x 18" Square or 18" Dia. minimum leave-out.

- GENERAL NOTES**
1. This mow strip design is for use with metal beam guard fence, guard fence transitions, and guard fence end treatments. See applicable GF(31) MBGF or GF(31) Transition Standard sheet for additional information.
 2. Mow strips shall be reinforced concrete with (wire mesh or synthetic fiber), as shown on the plans and will be paid for under the pertinent bid item. Reinforced concrete shall be placed in accordance with Item 432, "Riprap." The use of the synthetic fiber in lieu of steel reinforcing is acceptable, provided the fiber producer is on the Department Material Producer List (MPL), maintained by TxDOT, Construction Division.
 3. The leave-out behind the post shall be a minimum of 7".
 4. Only steel (W6 x 8.5 or W6 x 9.0), or 7 1/2" Dia. round wood posts are acceptable for use in the mow strip. See GF(31) Standard for additional details.
 5. Other curb placement options may be used. Curbs are not considered part of the mow strip and will be paid for under other pertinent bid item.
 6. Thickness of the mow strip will be 4".
 7. The limits of payment for reinforced concrete will include leave-outs for the posts.
 8. The leave-outs shall be filled with a Grout mixture consisting of: 2719 pounds sand, 188 pounds Type 1 or II cement, and 550 pounds of water per cubic yard, with a 28-day compressive strength of approximately 230 psi or less. Provide grout with a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (Suggested Maximum leave-out of 20"). Payment for furnishing and placing the grout mixture will be subsidiary to the pay item of riprap mow strip.

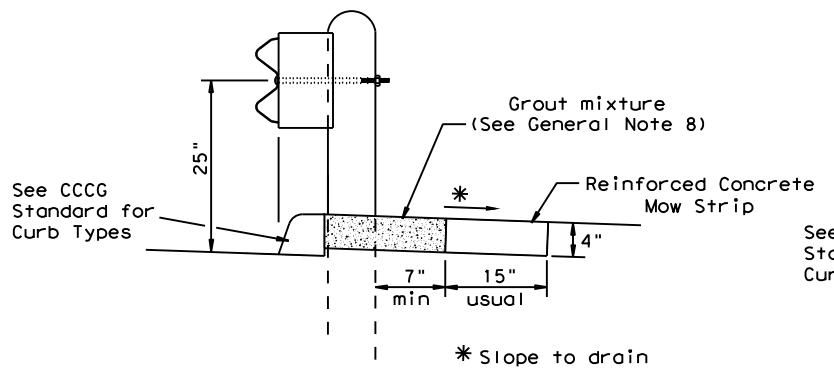


CURB OPTION (1)

This option will increase the post embedment throughout the system.

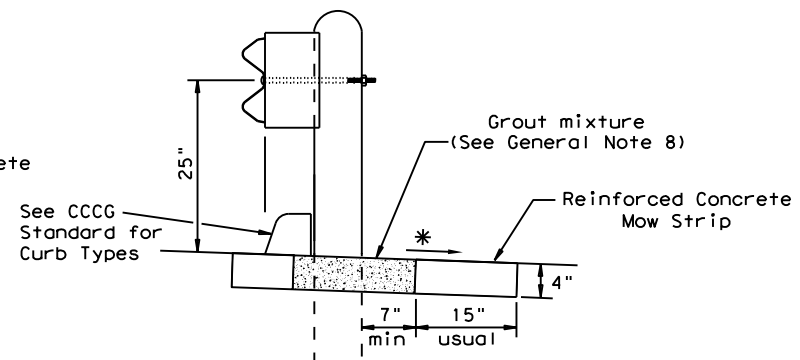

CURB OPTION (2)


Curb shown on top of mow strip

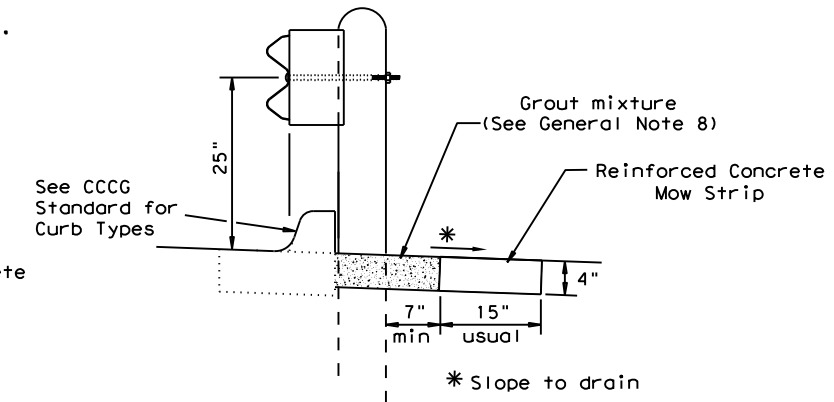

CURB OPTION (3)

		Design Division Standard	
METAL BEAM GUARD FENCE (MOW STRIP) TL-3 MASH COMPLIANT GF(31)MS-19			
FILE: gf31ms19.dgn	DN: TXDOT	CK: KM	DW: VP
©TXDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	0568	01	059
	DIST	COUNTY	SH 34
	DAL	ELLIS	SHEET NO. 34






DATE: 4/12/2022
 FILE: \\txdot.projectwiseonline.com\TXDOT5\Documents\18 - DAL\Design Projects\0568010594 - Design\Plan Set\10 - Miscellaneous\gf31tr+1320.dgn
 DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

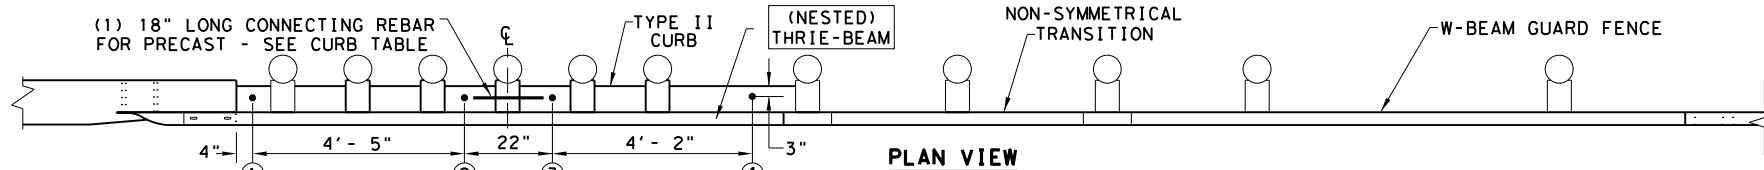


- (5) 1" DIA. HOLES.
- (5) 7/8" DIA. HEAVY HEX HEAD BOLTS (FACING TRAFFIC SIDE) (ASTM F3125 GR A325 OR A449).
- (10) 1 3/4" O.D. WASHER UNDER EACH HEX BOLT HEAD AND NUT.
- (5) 7/8" DIA. HEAVY HEX NUTS (ASTM A194 OR A563).

NOTE:
HEAVY HEX BOLT LENGTH WILL VARY DEPENDING ON WIDTH CONCRETE RAIL, LEAVE 1" OF BOLT LENGTH PAST THE 7/8" HEX NUT. TRIM AS REQUIRED.

NOTE:
CURB IS A REQUIRED COMPONENT FOR THE TRANSITION TO FUNCTION PROPERLY. SEE GENERAL NOTES: 2-4 AND 16-17.

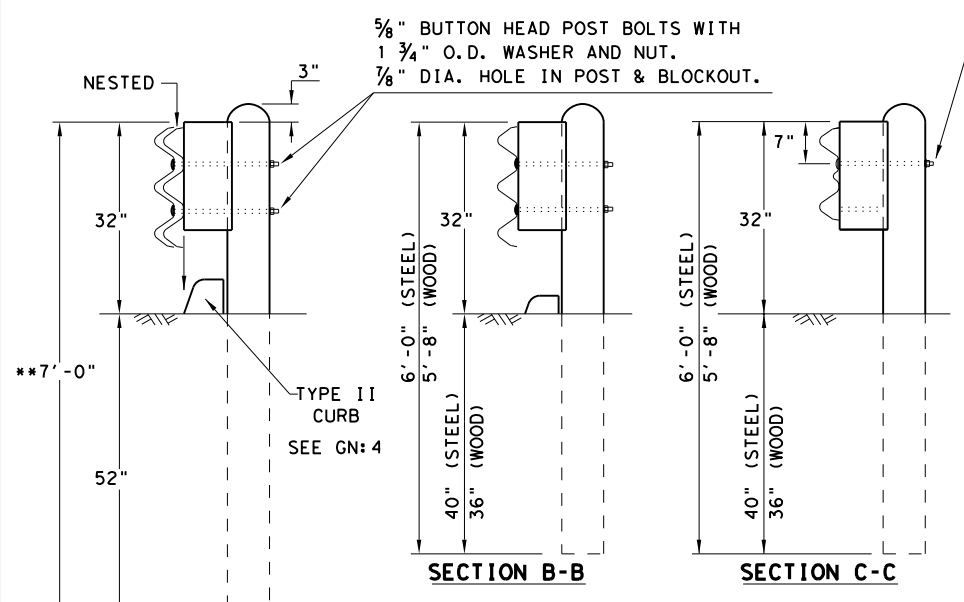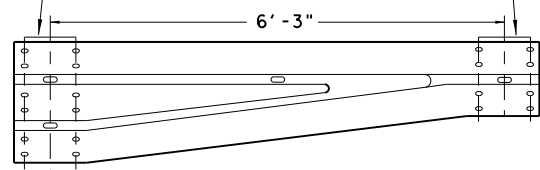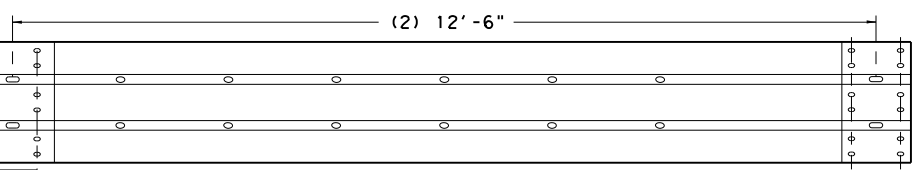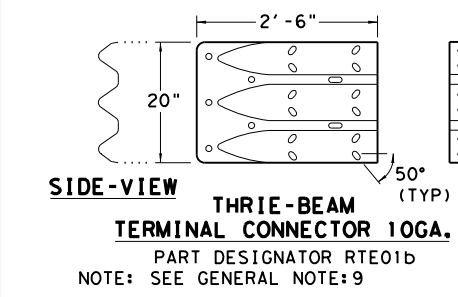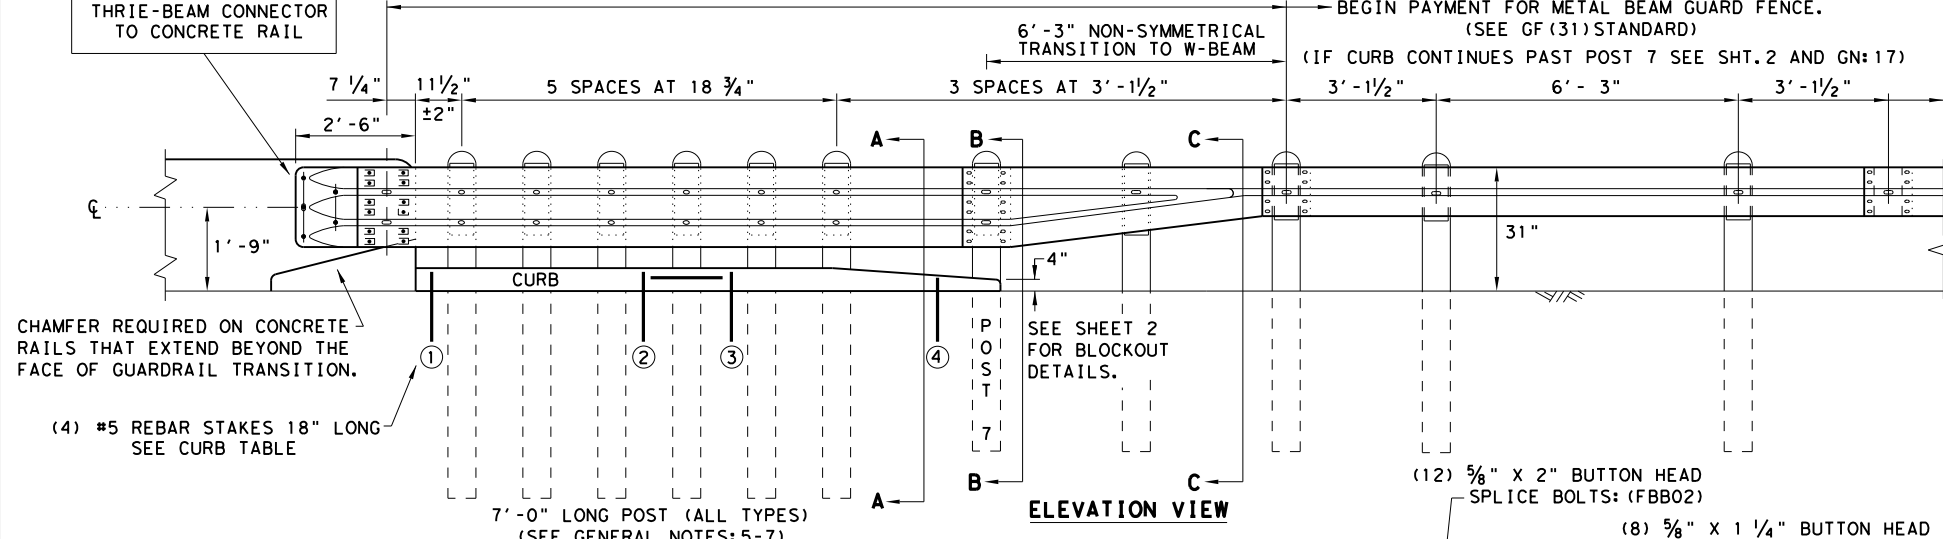

THRIE-BEAM TERMINAL - CURB TABLE	
PRECAST CURB FULL LENGTH EQUALS 12' - 2"	
THE PRECAST CURB MAY BE FORMED INTO TWO SECTIONS.	
CURB (1) LENGTH	5' - 8"
CURB (2) LENGTH	6' - 6"
TAPER CURB (2) TO A HEIGHT OF 4" AT POST 7	
CONNECTING PRECAST CURB SECTIONS (1) & (2):	
FORM OR CORE	1" DIA. HOLE 9" LONG INTO EACH CURB END.
USE	(1) #5 GR.60 REBAR 18" LONG TO CONNECT BOTH CURBS.
SECURING PRECAST OR CAST-IN-PLACE TO FINISHED GRADE *:	
FORM OR CORE	(4) 1" DIA. HOLES, SEE PLAN AND ELEVATION VIEWS FOR HOLE LOCATIONS. DRIVE (4) #5 GR.60 REBAR STAKES 18" LONG INTO THE GROUND AND 1/2" BELOW TOP OF CURB.
FILL HOLES WITH APPROVED GROUT MIXTURE.	

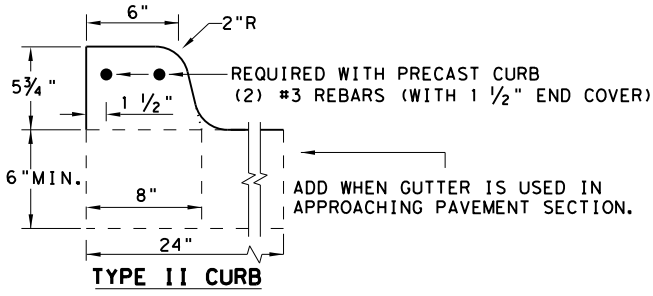

* NOTES: NOT NEEDED FOR CAST-IN-PLACE. SEE TYPE II CURB DETAIL FOR REBAR AND COVER REQUIREMENTS. PERCUSSION DRILLING IS NOT PERMITTED WITH: TYPE II CURB, BRIDGE RAIL OR CONCRETE TRAFFIC RAIL.

GENERAL NOTES

1. CONTACT THE DESIGN DIVISION FOR DRAINAGE CUT OUT OPTIONS NEEDED WITHIN THE CURB SECTION OF THE THRIE-BEAM TRANSITION. (512) 416-2678
2. CONCRETE CURB MAY BE CAST-IN-PLACE OR PRECAST AS SHOWN ON THIS SHEET. WHEN USED IN CONJUNCTION WITH THE THRIE-BEAM TRANSITIONS, CURB SHALL BE TYPE II (5- 3/4" HEIGHT); SEE CURRENT CCGG STANDARD SHEET FOR FURTHER DETAILS. IF OTHER CURB HEIGHTS ARE SHOWN IN THE PLANS IN CONJUNCTION WITH THE TRANSITION, THE CURB HEIGHT MAY BE FROM 4" TO 8" WITH A RELATIVELY VERTICAL FACE. CONCRETE CURB SHALL BE CONTINUOUS TO THE SEVENTH POST UNLESS OTHERWISE SHOWN IN THE PLANS. SEE GENERAL NOTE:17 FOR CIRCUMSTANCES WHERE CURB CONTINUES PAST POST 7.
3. CONCRETE CURB TYPE II SUBSIDIARY TO "METAL BEAM GUARD FENCE TRANSITION". IF NO ADDITIONAL CURB IS INDICATED BEYOND THE TRANSITION, THEN ANY CURB HEIGHT GREATER THAN 4" WILL BE TAPERED DOWN BEGINNING AT THE LAST 7 FT. POST TO A MAXIMUM HEIGHT OF 4" AT POST 7. IF SHOWN ELSEWHERE IN THE PLANS, ADDITIONAL CURB UNDERNEATH GUARDRAIL WILL BE PAID FOR BY THE LINEAR FOOT.
4. UNLESS OTHERWISE SHOWN IN THE PLANS, TRANSITIONS SHALL BE PLACED WITH THE BLOCKOUT FACE IN FRONT OF OR DIRECTLY ABOVE THE CURB FACE. SEE SECTION A-A.
5. FOR ROUND WOOD POST SYSTEMS, ALL ROUND WOOD POSTS SHALL BE 7 1/2" DIA. MINIMUM THROUGHOUT THE THRIE-BEAM TRANSITION.
6. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. REFER TO GF (31) STANDARD SHEET.
7. THE POST LENGTH SHALL BE MARKED ON ALL 7' - 0" LONG POSTS BY THE MANUFACTURER. THE MARK SHALL BE LOCATED WITHIN THE TOP 1 FT. REGION OF THE POST, AT LEAST 5/8" IN HEIGHT, AND VISIBLE AFTER INSTALLATION. WOODEN POSTS SHALL BE MARKED WITH A BRAND, AND STEEL POSTS WITH A STENCIL BEFORE GALVANIZING.
8. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
9. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE THRIE-BEAM TERMINAL CONNECTOR AND THE THRIE-BEAM TRANSITION TO W-BEAM SHALL BE OF THE SAME MATERIAL, BUT SHALL NOT BE LESS THAN 10 GAUGE. CONTRACTOR SHALL VERIFY THAT THE LOCATIONS OF BOLT HOLES MATCH THOSE IN THE THRIE-BEAM TERMINAL CONNECTOR PRIOR TO ORDERING MATERIALS.
10. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC16G) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
11. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
12. CROWN SHALL BE WIDENED TO ACCOMMODATE TRANSITIONS.
13. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
14. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. TXDOT'S MATERIALS AND TESTS DIVISION MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL CAN FURNISH COMPOSITE MATERIAL BLOCKS.
15. REFER TO GF (31) STANDARD SHEET & BRIDGE RAILING DETAILS FOR ADDITIONAL DETAILS.
16. THE INSTALLATION OF THE TYPE II CURB IS CRITICAL FOR THE PERFORMANCE OF THE THRIE-BEAM TRANSITION SYSTEM. THE CURB PREVENTS (VEHICLE WHEEL SNAGGING) AT THE CONCRETE RAIL AND IS REQUIRED TO MEET MASH CRASH TEST CRITERIA.
17. IF CURB EXTENDS BEYOND POST 7, 25' OF NESTED W-BEAM GUARDRAIL SHALL BE INSTALLED BEYOND THE PAY LIMITS OF THRIE-BEAM TRANSITION SECTION, (SEE SHT.2). PAYMENT FOR THIS 25' SECTION WILL BE BY LINEAR FOOT, PAY ITEM "0540 6XXX MTL W-BEAM GD FEN (NESTED) (TIM POST)" OR "540 6XXX MTL W-BEAM GD FEN (NESTED) (STEEL POST)" AS APPLICABLE FOR POST TYPE. SEE SHT.2 FOR ADDITIONAL INFORMATION.


**HIGH-SPEED TRANSITION
SHEET 1 OF 2**

		Design Division Standard	
METAL BEAM GUARD FENCE THRIE-BEAM TRANSITION TL-3 MASH COMPLIANT GF (31) TR TL3-20			
FILE: gf31tr+1320.dgn	DN: TXDOT	CK: KM	DW: VP
© TXDOT: NOVEMBER 2020	CONT	SECT	JOB
REVISIONS	0568	01	059
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	35	


DATE: 4/12/2022
 FILE: pw:\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10. Miscellaneous\gf31tr+1320.dgn

DISCLAIMER:
 THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER.
 TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


REQUIRED ALTERNATIVE FOR CONTINUOUS CURB EXTENDING PAST POST 7 (SEE SHT. 1 GENERAL NOTE 17)

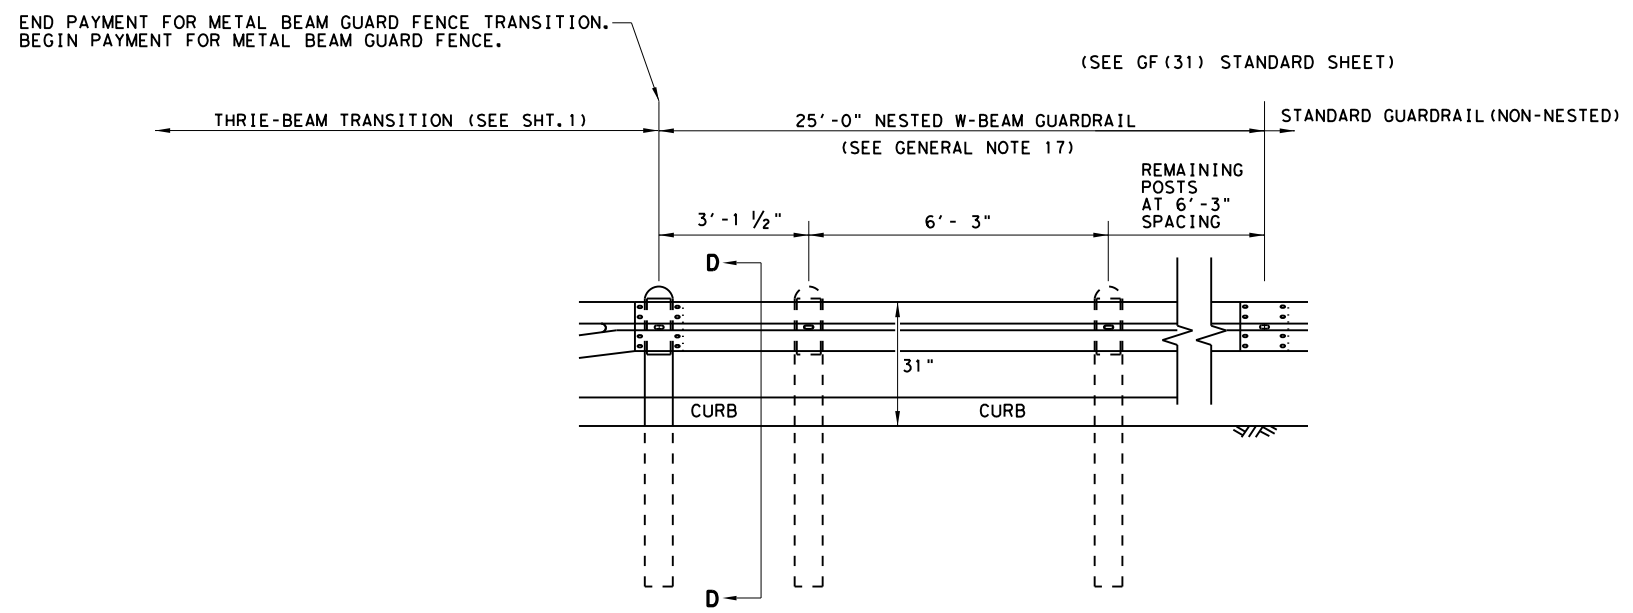

ELEVATION VIEW

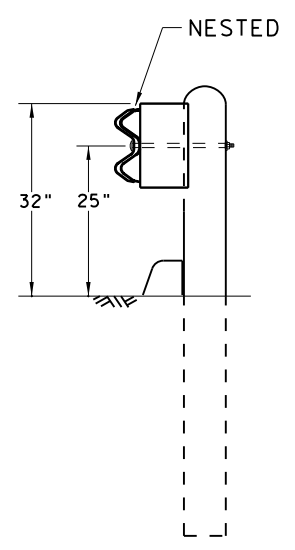

SECTION D-D

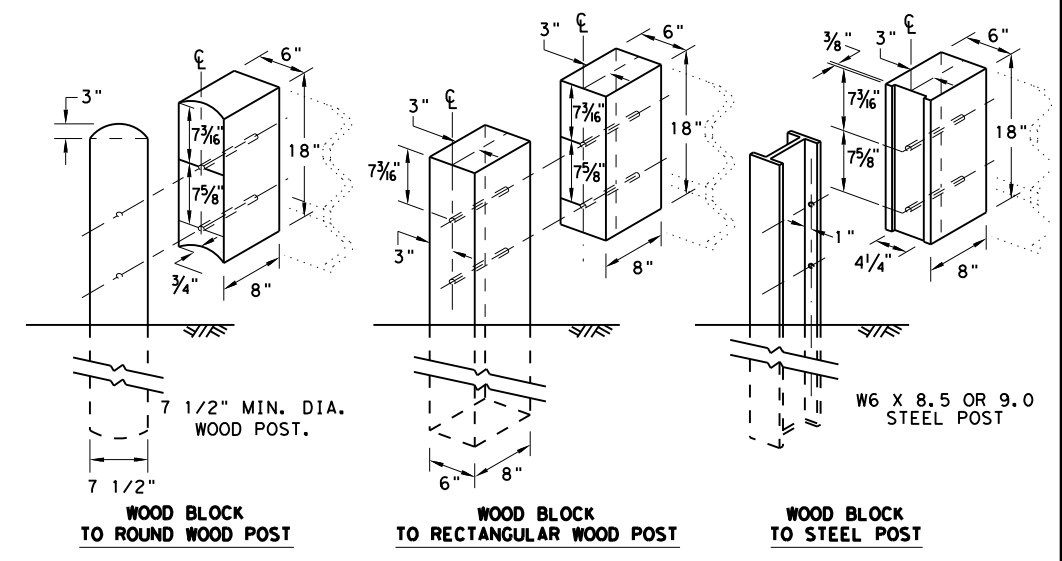

THREE BEAM TRANSITION BLOCKOUT DETAILS


HIGH-SPEED TRANSITION

SHEET 2 OF 2

				Design Division Standard	
METAL BEAM GUARD FENCE THREE-BEAM TRANSITION TL-3 MASH COMPLIANT GF (31) TR TL3-20					
FILE: gf31tr+1320.dgn	DN: TXDOT	CK: KM	DW: KM	CK: CGL/AG	
©TXDOT: NOVEMBER 2020	CONT	SECT	JOB	HIGHWAY	
REVISIONS		0568	01	059	SH 34
DIST	COUNTY	SHEET NO.			
DAL	ELLIS	36			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of any information resulting from its use.





DATE: 4/12/2022
 FILE: \\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\18092018\18092018.dwg

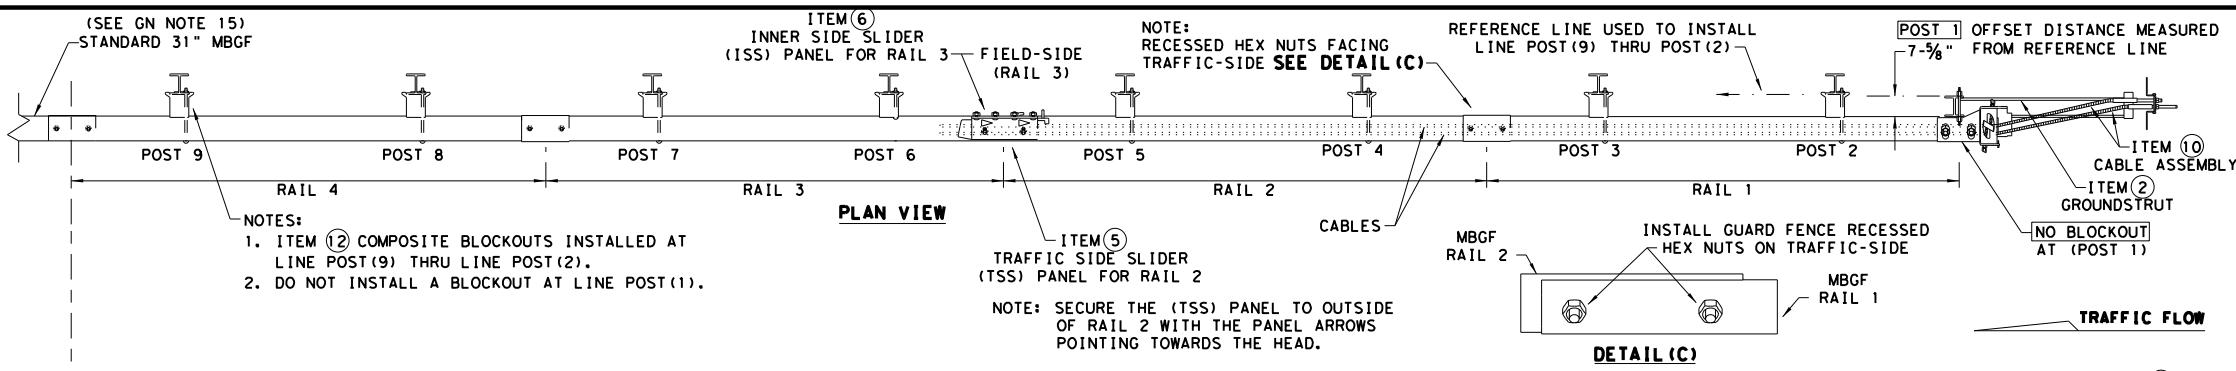


NOTES:
 1. ITEM ② COMPOSITE BLOCKOUTS INSTALLED AT LINE POST (9) THRU LINE POST (2).
 2. DO NOT INSTALL A BLOCKOUT AT LINE POST (1).

NOTE: RECESSED HEX NUTS FACING TRAFFIC-SIDE SEE DETAIL (C)
 NOTE: SECURE THE (TSS) PANEL TO OUTSIDE OF RAIL 2 WITH THE PANEL ARROWS POINTING TOWARDS THE HEAD.

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800
 - FOR INSTALLATION, REPAIR, & MAINTENANCE REFER TO THE MAX-TENSION INSTALLATION INSTRUCTION MANUAL, P/N MANMAX REV D (ECN 3516).
 - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - ALL STEEL COMPONENTS ARE GALVANIZED PER ASTM A123 OR EQUIVALENT UNLESS OTHERWISE STATED.
 - SYSTEM SHOWN USING STEEL WIDE FLANGE POST WITH COMPOSITE BLOCKOUTS.
 - COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - REFER TO INSTALLATION MANUAL FOR SPECIFIC PANEL LAPPING GUIDANCE.
 - IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL FOR INSTALLATION GUIDANCE.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POST TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST.
 - MAX-TENSION SYSTEM SHALL NEVER BE INSTALLED WITHIN A CURVED SECTION OF GUARDRAIL.
 - IF A DELINEATION MARKER IS REQUIRED, MARKER SHALL BE IN ACCORDANCE WITH TEXAS MUTCD.
 - THE SYSTEM IS SHOWN WITH 12'-6" MBGF PANELS, 25'-0" MBGF PANELS ARE ALSO ALLOWED.
 - A MINIMUM OF 12'-6" OF 12GA. MBGF IS REQUIRED IMMEDIATELY DOWNSTREAM OF THE MAX-TENSION SYSTEM.

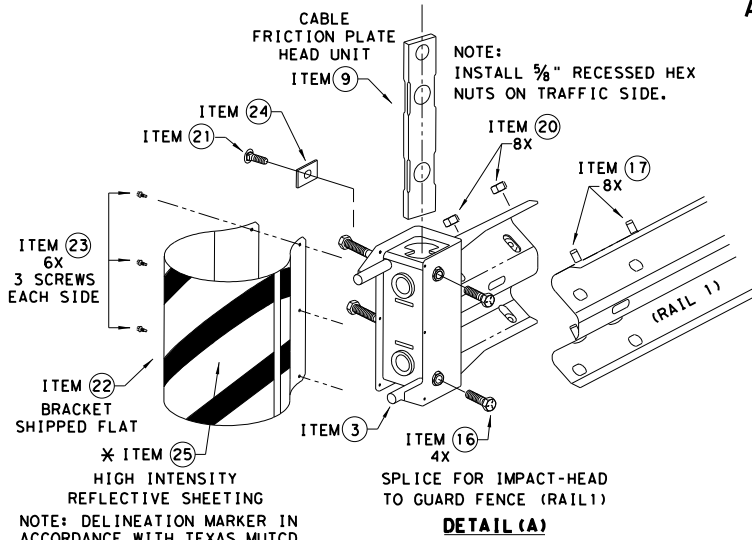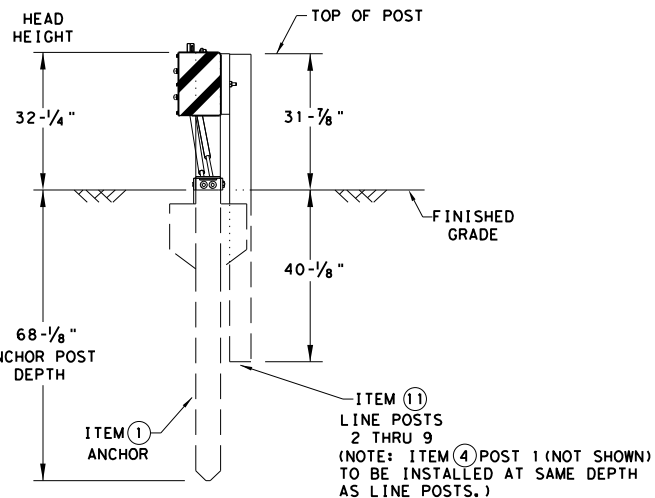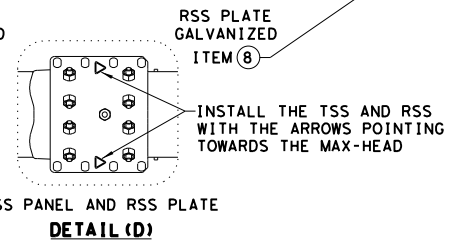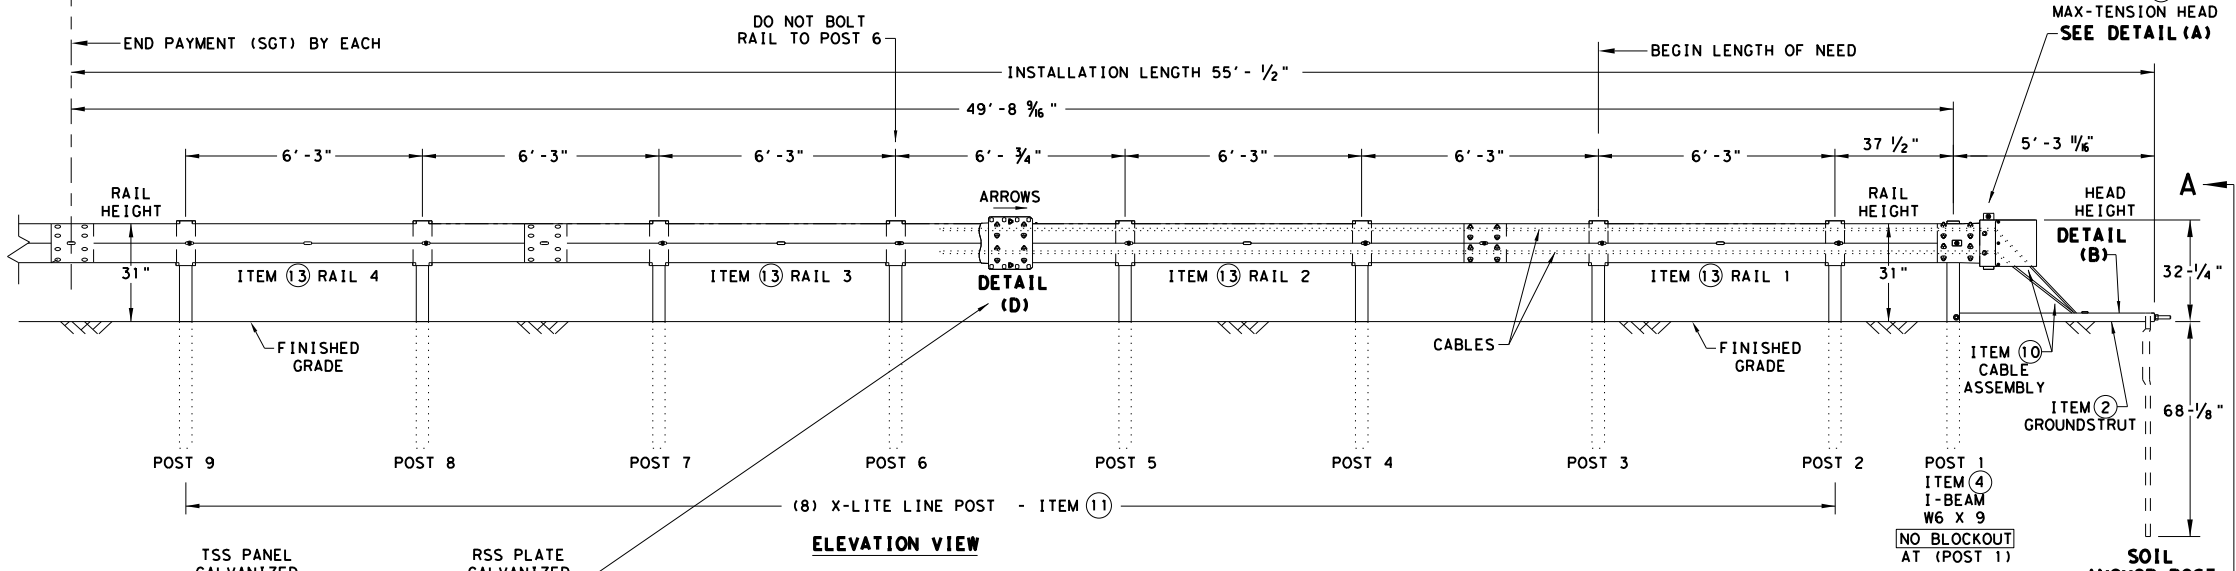

ITEM #	PART NUMBER	DESCRIPTION	QTY
1	BSI-1610060-00	SOIL ANCHOR - GALVANIZED	1
2	BSI-1610061-00	GROUND STRUT - GALVANIZED	1
3	BSI-1610062-00	MAX-TENSION IMPACT HEAD	1
4	BSI-1610063-00	W6x9 I-BEAM POST 6FT.-GALVANIZED	1
5	BSI-1610064-00	TSS PANEL - TRAFFIC SIDE SLIDER	1
6	BSI-1610065-00	ISS PANEL - INNER SIDE SLIDER	1
7	BSI-1610066-00	TOOTH - GEOMET	1
8	BSI-1610067-00	RSS PLATE - REAR SIDE SLIDER	1
9	B061058	CABLE FRICTION PLATE - HEAD UNIT	1
10	BSI-1610069-00	CABLE ASSEMBLY - MASH X-TENSION	2
11	BSI-1012078-00	X-LITE LINE POST-GALVANIZED	8
12	B090534	8" W-BEAM COMPOSITE-BLOCKOUT XT110	8
13	BSI-4004386	12'-6" W-BEAM GUARD FENCE PANELS 12GA.	4
14	BSI-1102027-00	X-LITE SQUARE WASHER	1
15	BSI-2001886	3/8" X 7" THREAD BOLT HH (GR.5)GEOMET	1
16	BSI-2001885	3/4" X 3" ALL-THREAD BOLT HH (GR.5)GEOMET	4
17	4001115	5/8" X 1 1/4" GUARD FENCE BOLTS (GR.2)MGAL	48
18	2001840	5/8" X 10" GUARD FENCE BOLTS MGAL	8
19	2001636	5/8" WASHER F436 STRUCTURAL MGAL	2
20	4001116	5/8" RECESSED GUARD FENCE NUT (GR.2)MGAL	59
21	BSI-2001888	3/8" X 2" ALL THREAD BOLT (GR.5)GEOMET	1
22	BSI-1701063-00	DELINEATION MOUNTING (BRACKET)	1
23	BSI-2001887	1/4" X 3/4" SCREW SD HH 410SS	7
24	4002051	GUARDRAIL WASHER RECT AASHTO FWRO3	1
25	SEE NOTE BELOW	HIGH INTENSITY REFLECTIVE SHEETING	1
26	4002337	8" W-BEAM TIMBER-BLOCKOUT, PDB01B	8
27	BSI-4004431	25' W-BEAM GUARDRAIL PANEL, 8-SPACE, 12GA.	2
28	MANMAX Rev-(D)	MAX-TENSION INSTALLATION INSTRUCTIONS	1

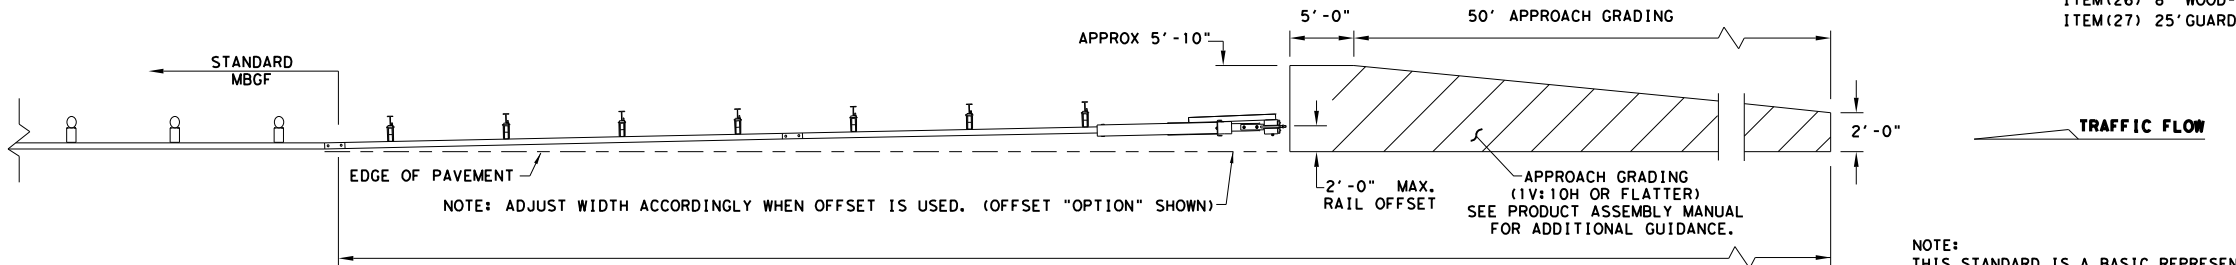

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

APPROACH GRADING AT GUARDRAIL END TREATMENTS


NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MAX-TENSION END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

* TO BE PROVIDED BY DISTRIBUTOR OR CONTRACTOR.
 ** ALTERNATIVE ITEMS NOT SHOWN. ITEM (26) 8" WOOD-BLOCKOUTS ITEM (27) 25' GUARD FENCE PANELS

Texas Department of Transportation
MAX-TENSION END TERMINAL
MASH - TL-3
SGT (11S) 31-18



FILE: sg11s3118.dgn	DN: TxDOT	CK: KM	DW: TxDOT	CK: CL
© TxDOT: FEBRUARY 2018	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
DIST	COUNTY			SHEET NO.
DAL	ELLIS			38

DATE: 4/12/2022
 FILE: \\txdot\projectwiseonline.com\TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10. Miscellaneou\sgt12s3118.dgn
 DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

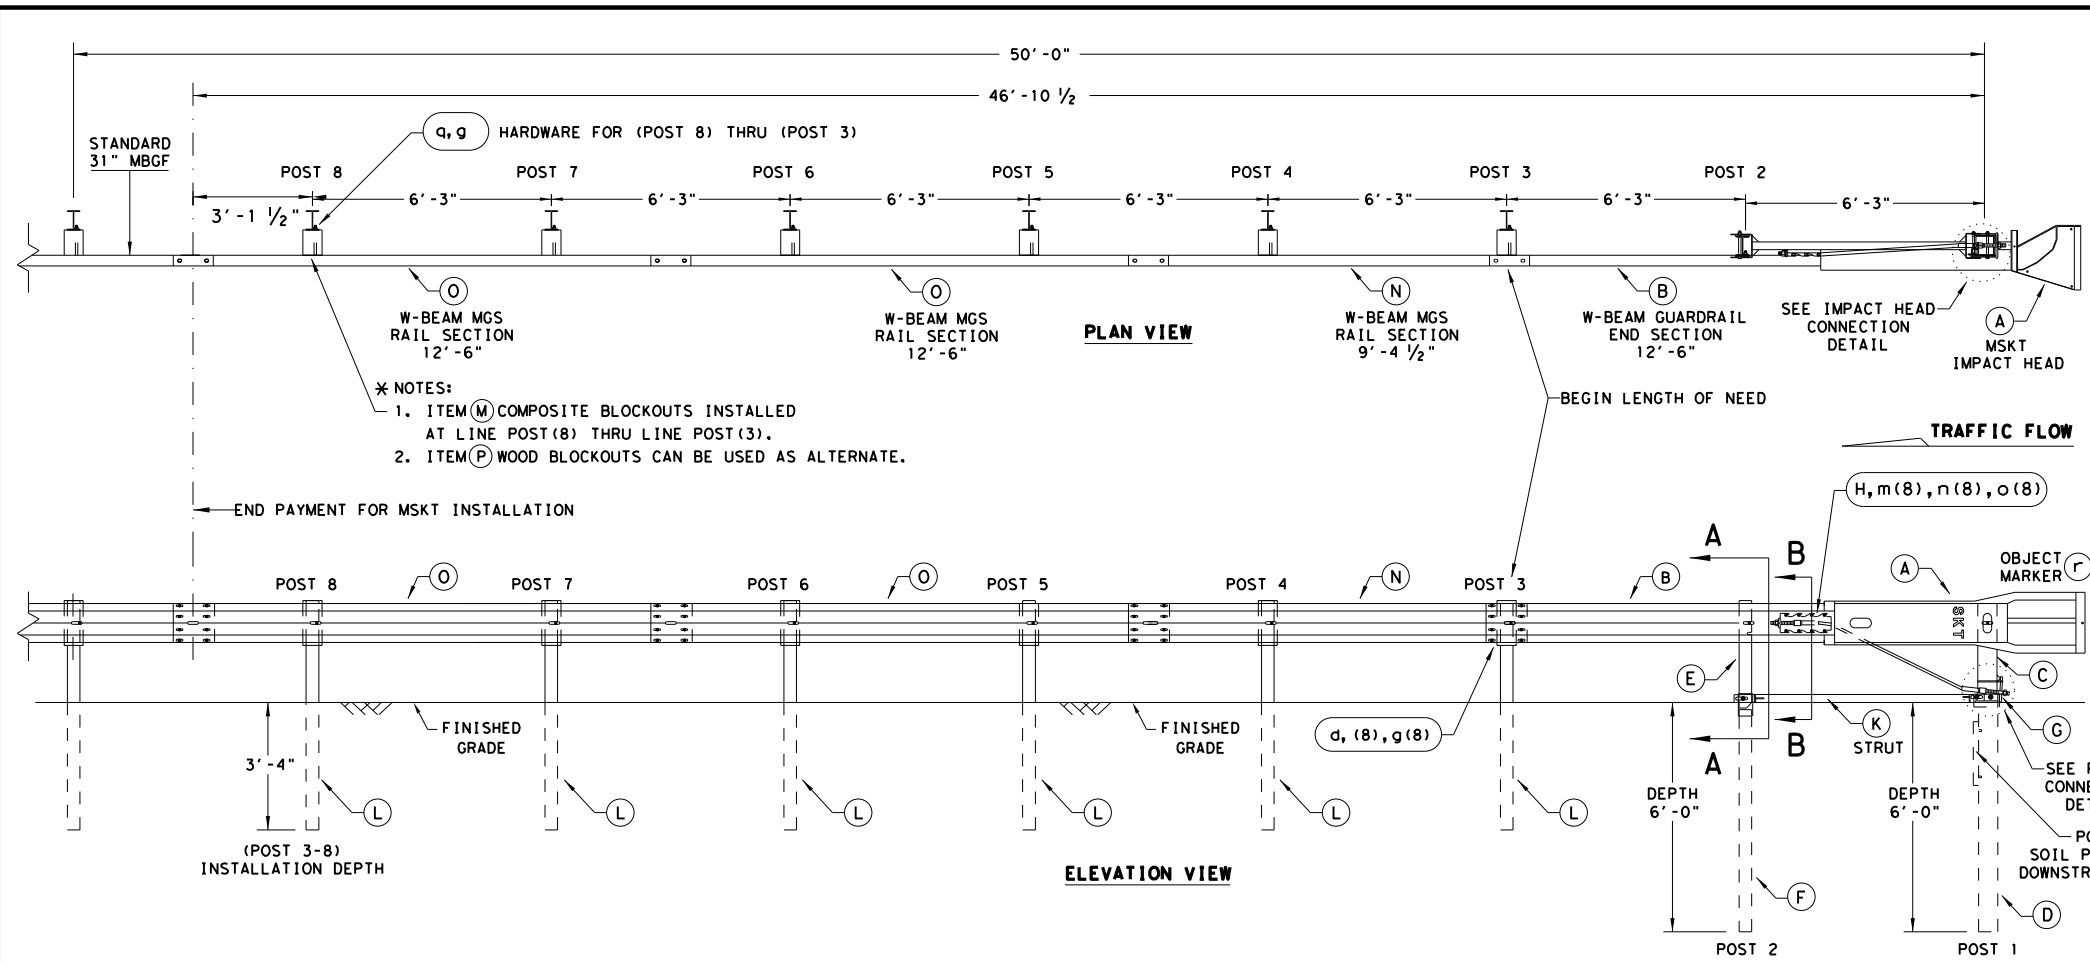

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
 - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
 - A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBSG STANDARD FOR INSTALLATION GUIDANCE.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - SYSTEM MUST BE ATTACHED TO STANDARD 31" MBSG.
 - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
 - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRANCHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
 - THE SYSTEM IS SHOWN WITH TWO 12'-6" MBSG PANELS, ONE 25'-0" MBSG PANEL IS ALSO ALLOWED IN ITS PLACE.
 - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM NUMBERS
A	1	MSKT IMPACT HEAD	MS3000
B	1	W-BEAM GUARDRAIL END SECTION, 12 Go.	SF1303
C	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
D	1	POST 1 - BOTTOM (6' W6X15)	MTPHP1B
E	1	POST 2 - ASSEMBLY TOP	UHP2A
F	1	POST 2 - ASSEMBLY BOTTOM (6' W6X9)	HP2B
G	1	BEARING PLATE	E750
H	1	CABLE ANCHOR BOX	S760
J	1	BCT CABLE ANCHOR ASSEMBLY	E770
K	1	GROUND STRUT	MS785
L	6	W6X9 OR W6X8.5 STEEL POST	P621
M	6	COMPOSITE BLOCKOUTS	CBSP-14
N	1	W-BEAM MGS RAIL SECTION (9'-4 1/2")	G12025
O	2	W-BEAM MGS RAIL SECTION (12'-6")	G1203A
P	6	WOOD BLOCKOUT 6" X 8" X 14"	P675
Q	1	W-BEAM MGS RAIL SECTION (25'-0")	G1209
SMALL HARDWARE			
a	2	5/8" x 1" HEX BOLT (GRD 5)	B5160104A
b	4	5/8" WASHER	W0516
c	2	5/8" HEX NUT	N0516
d	25	5/8" Dia. x 1 1/4" SPLICE BOLT (POST 2)	B580122
e	2	5/8" Dia. x 9" HEX BOLT (GRD A449)	B580904A
f	3	5/8" WASHER	W050
g	33	5/8" Dia. H.G.R NUT	N050
h	1	3/4" Dia. x 8 1/2" HEX BOLT (GRD A449)	B340854A
j	1	3/4" Dia. HEX NUT	N030
k	2	1 ANCHOR CABLE HEX NUT	N100
l	2	1 ANCHOR CABLE WASHER	W100
m	8	1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER	SB12A
n	8	1/2" STRUCTURAL NUTS	N012A
o	8	1 1/8" O.D. x 3/8" I.D. STRUCTURAL WASHERS	W012A
p	1	BEARING PLATE RETAINER TIE	CT-100ST
q	6	5/8" x 10" H.G.R. BOLT	B581002
r	1	OBJECT MARKER 18" X 18"	E3151

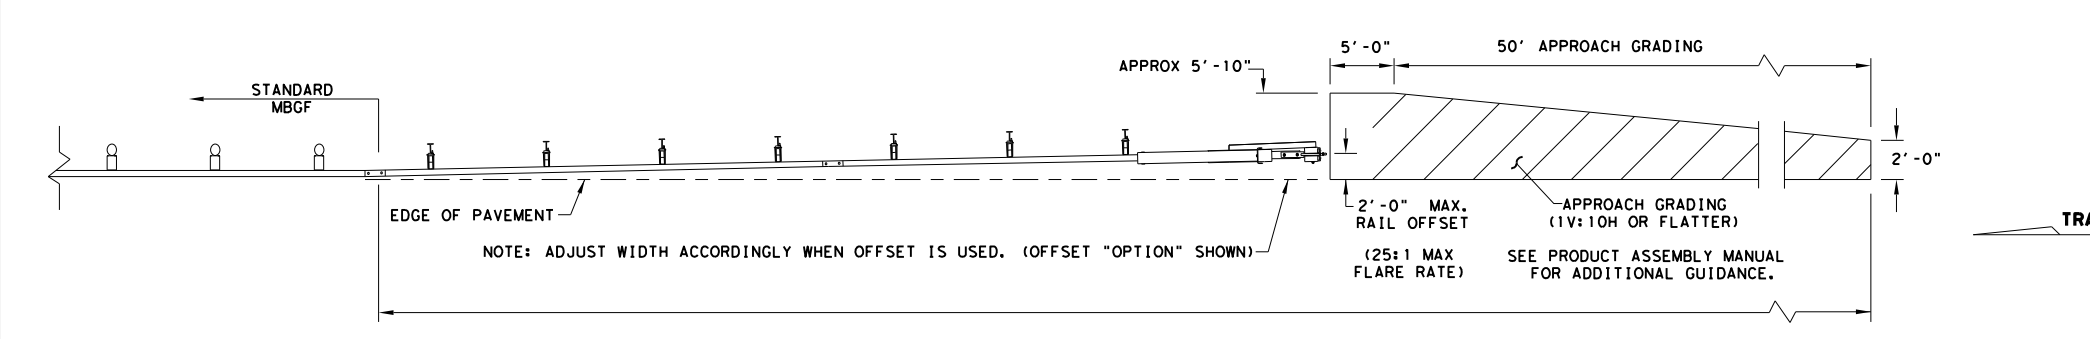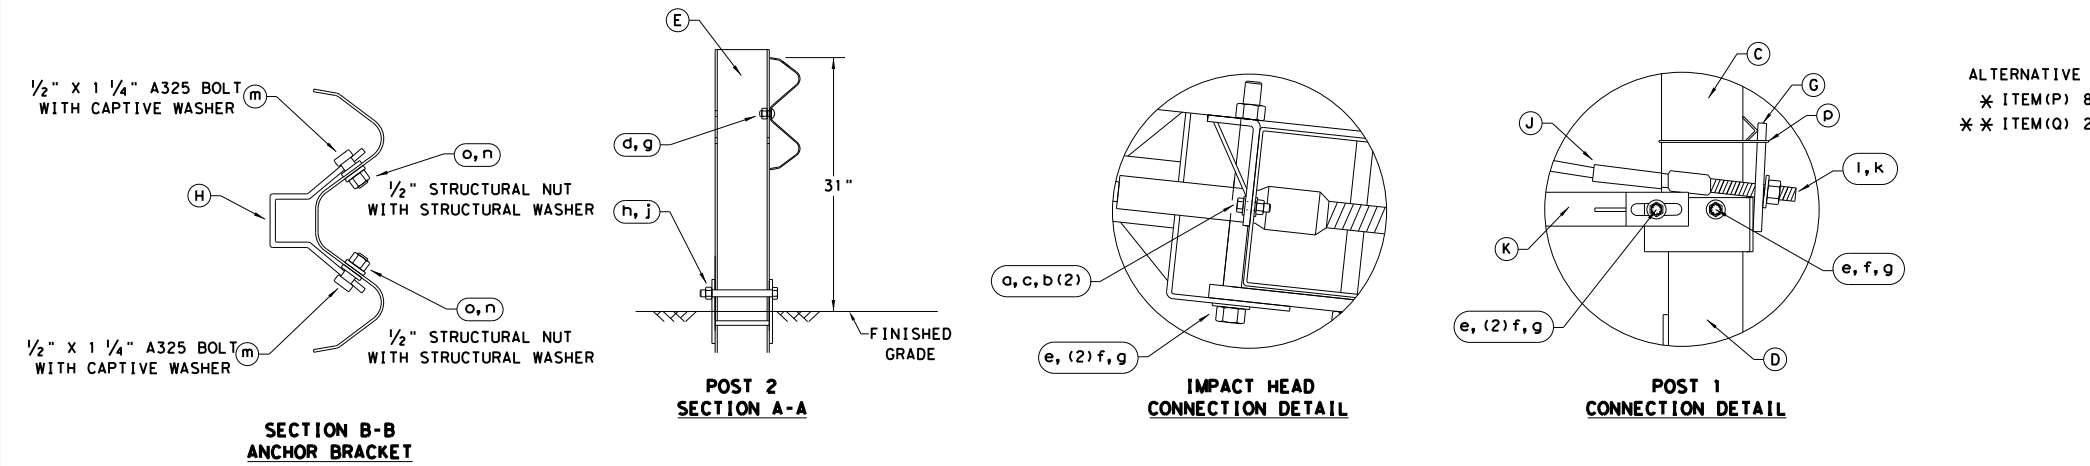

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

Design Division Standard


SINGLE GUARDRAIL TERMINAL

MSKT-MASH-TL-3

SGT (12S) 31-18

FILE: sgt12s3118.dgn	DN: TXDOT	CK: KM	DW: VP	CK: CL
© TXDOT: APRIL 2018	CONT SECT	JOB	HIGHWAY	
REVISIONS	0568	01	059	SH 34
	DIST	COUNTY		SHEET NO.
	DAL	ELLIS		39



DATE: 4/12/2022
 FILE: \\txdot\project\wiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\0568010594 - Design\Plan Set\10. Miscellaneous\sgt153120.dgn
 DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

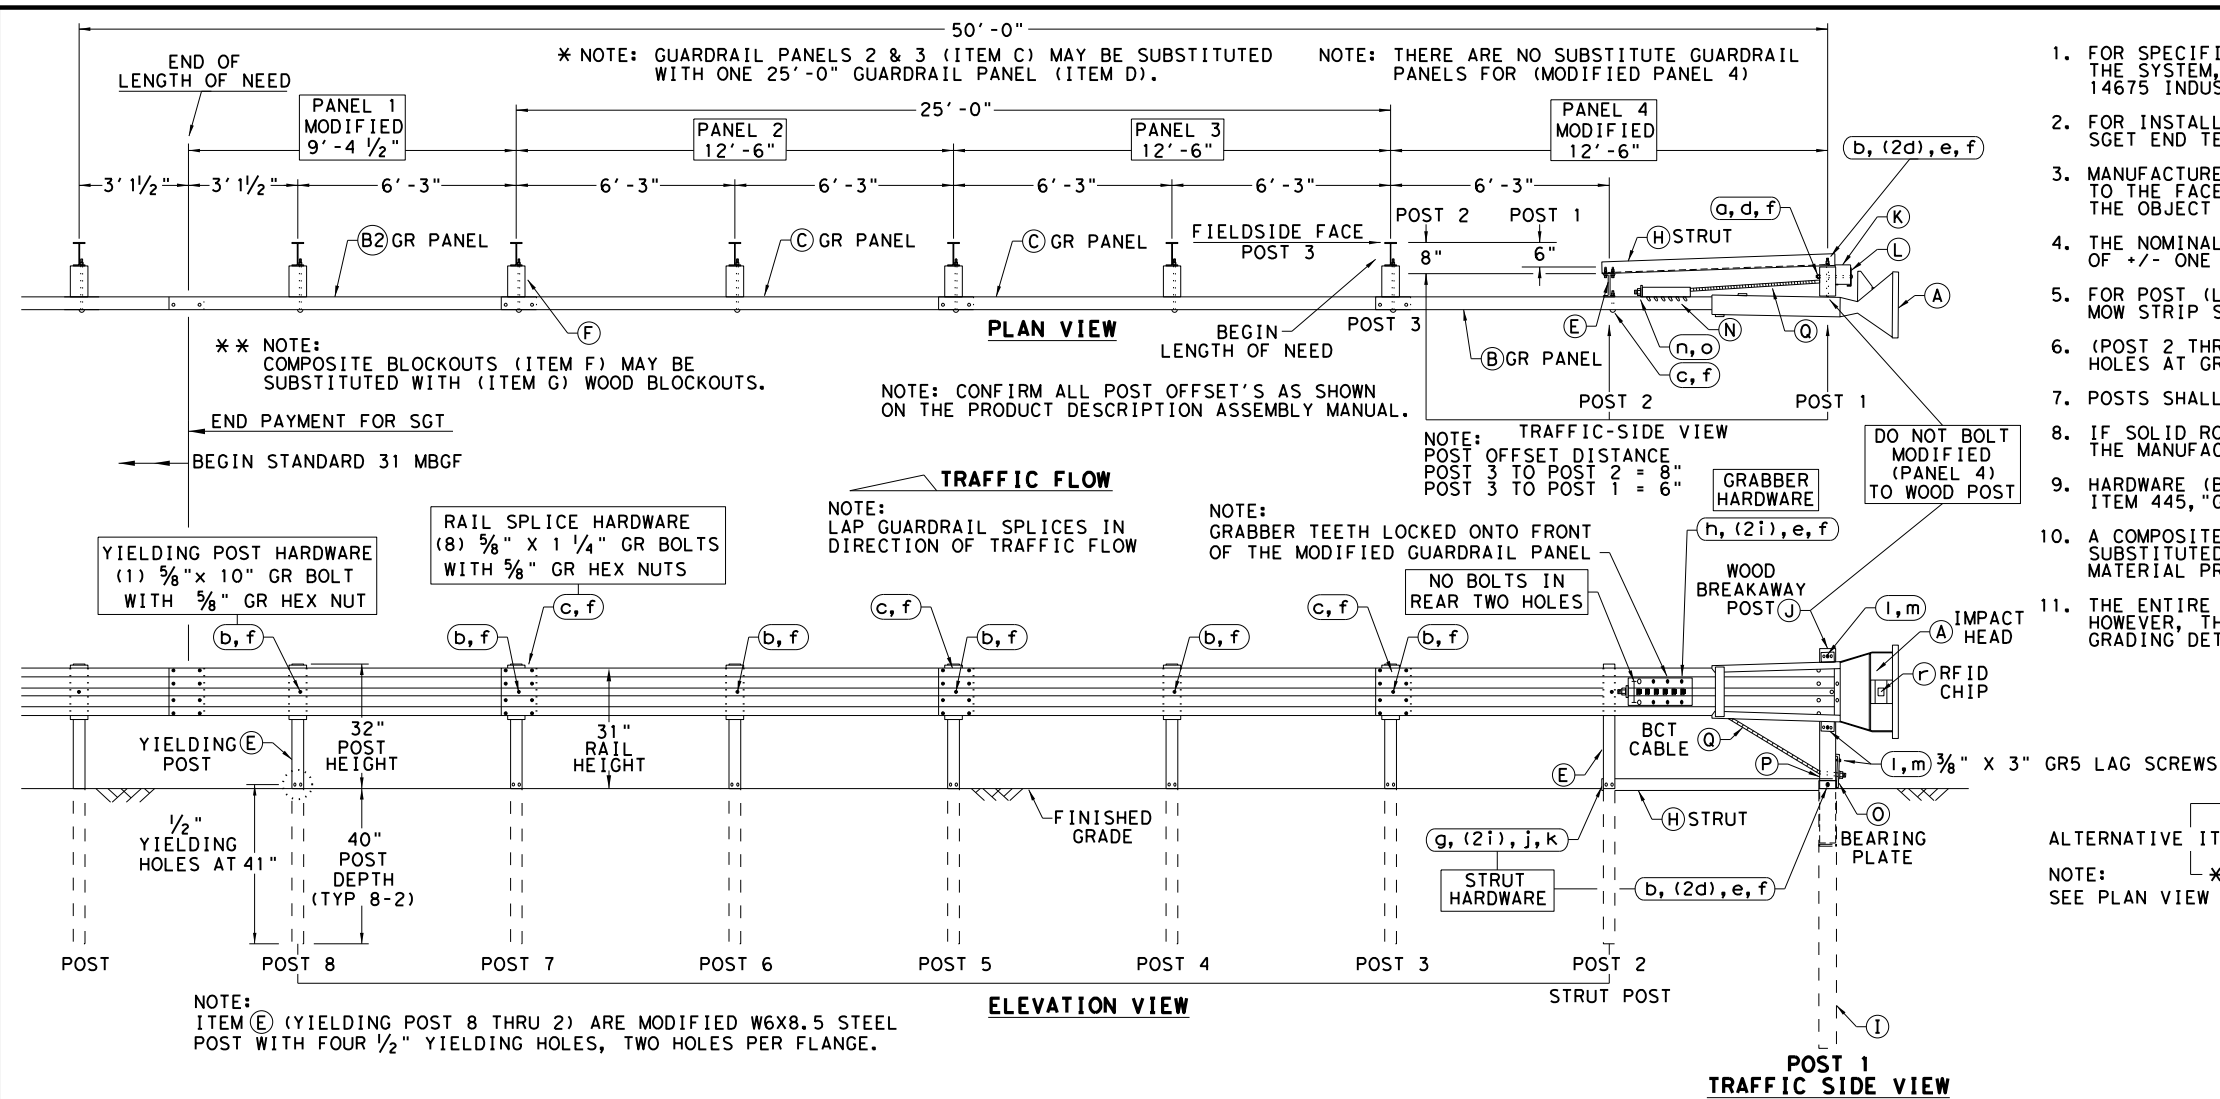

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: SPIG INDUSTRY, INC. AT 1(267) 644-9510. 14675 INDUSTRIAL PARK RD; BRISTOL, VA 24202
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE MANUFACTURER'S; SGET END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL.
 - MANUFACTURER WILL APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" TO THE FACE PLATE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. THE OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - THE NOMINAL HEIGHT OF THE GUARDRAIL BEAM IS 31 INCHES WITH A TOLERANCE OF +/- ONE INCH.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - (POST 2 THROUGH POST 8) ARE MODIFIED STEEL-YIELDING POSTS WITH YIELDING HOLES AT GROUND LEVEL. THERE ARE NO SUBSTITUTE POSTS.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - IF SOLID ROCK IS ENCOUNTERED FOR ANY OF THE POSTS IN THE SYSTEM, CONTACT THE MANUFACTURER FOR SPECIFIC INSTALLATION GUIDANCE.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - A COMPOSITE MATERIAL BLOCKOUT THAT MEETS DMS-7210 REQUIREMENTS MAY BE SUBSTITUTED FOR AN APPROVED WOOD BLOCKOUT. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - THE ENTIRE SYSTEM MUST BE INSTALLED IN A STRAIGHT LINE WITHOUT ANY CURVE. HOWEVER, THE SYSTEM CAN BE OFFSET BY TWO FEET AS SHOWN ON THE APPROACH GRADING DETAIL TO HELP OFF-SET THE IMPACT HEAD FROM SHOULDER OF THE ROAD.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM #
A	1	SGET IMPACT HEAD	SIH1A
B	1	MODIFIED GUARDRAIL PANEL 12'-6" 12GA	126SPZGP
B2	1	MODIFIED GUARDRAIL PANEL 9'-4 1/2" 12GA	GP94
C	2	STANDARD GUARDRAIL PANEL 12'-6" 12GA	GP126
D	1	STANDARD GUARDRAIL PANEL 25'-0" 12GA	GP25
E	7	MODIFIED YIELDING I-BEAM POST W6x8.5	YP6MOD
F	6	COMPOSITE BLOCKOUT 6" X 8" X 14"	CBO8
G	6	WOOD BLOCKOUT 6" X 8" X 14"	WBO8
H	1	STRUT 3" X 3" X 80" X 1/4" A36 ANGLE	STR80
I	1	FOUNDATION TUBE 6" X 8" X 72" X 3/8"	FNDT6
J	1	WOOD BREAKAWAY POST 5 1/2" X 7 1/2" X 50"	WBRK50
K	1	WOOD STRIKE BLOCK	WSBK14
L	1	STRIKE PLATE 1/4" A36 BENT PLATE	SPLT8
M	1	REINFORCEMENT PLATE 12 GA. GR55	REPLT17
N	1	GUARDRAIL GRABBER 2 1/2" X 2 1/2" X 16 1/2"	GGR17
O	1	BEARING PLATE 8" X 8 5/8" X 5/8" A36	BPLT8
P	1	PIPE SLEEVE 4 1/4" X 2 3/8" O.D. (2 1/8" I.D.)	PSLV4
Q	1	BCT CABLE 3/4" X 81" LENGTH	CBL81

ITEM	QTY	SMALL HARDWARE	ITEM #
a	1	5/8" X 12" GUARDRAIL BOLT 307A HDG	12GRBLT
b	7	5/8" X 10" GUARDRAIL BOLT 307A HDG	10GRBLT
c	33	5/8" X 1 1/4" GR SPlice BOLTS 307A HDG	1GRBLT
d	3	5/8" FLAT WASHER F436 A325 HDG	58FW436
e	1	5/8" LOCK WASHER HDG	58LW
f	39	5/8" GUARDRAIL HEX NUT HDG	58HN563
g	2	1/2" X 2" STRUT BOLT A325 HDG	2BLT
h	6	1/2" X 1 1/4" PLATE BOLT A325 HDG	125BLT
i	16	1/2" FLAT WASHER F436 A325 HDG	12FWF436
j	8	1/2" LOCK WASHER HDG	12LW
k	8	1/2" HEX NUT A563 HDG	12HN563
l	4	3/8" X 3" HEX LAG SCREW GR5 HDG	38LS
m	4	3/8" FLAT WASHER F436 A325 HDG	38FW844
n	2	1" FLAT WASHER F436 A325 HDG	1FWF436
o	2	1" HEX NUT A563HD HDG	1HN563
p	1	18" TO 24" LONG ZIP TIE RATED 175-200LB	ZPT18
q	1	1 1/2" X 4" SCH-40 PVC PIPE	PSPCR4
r	1	RFID CHIP RATED MIL-STD-810F	RFID810F
s	1	IMPACT HEAD REFLECTIVE SHEETING	RS30M

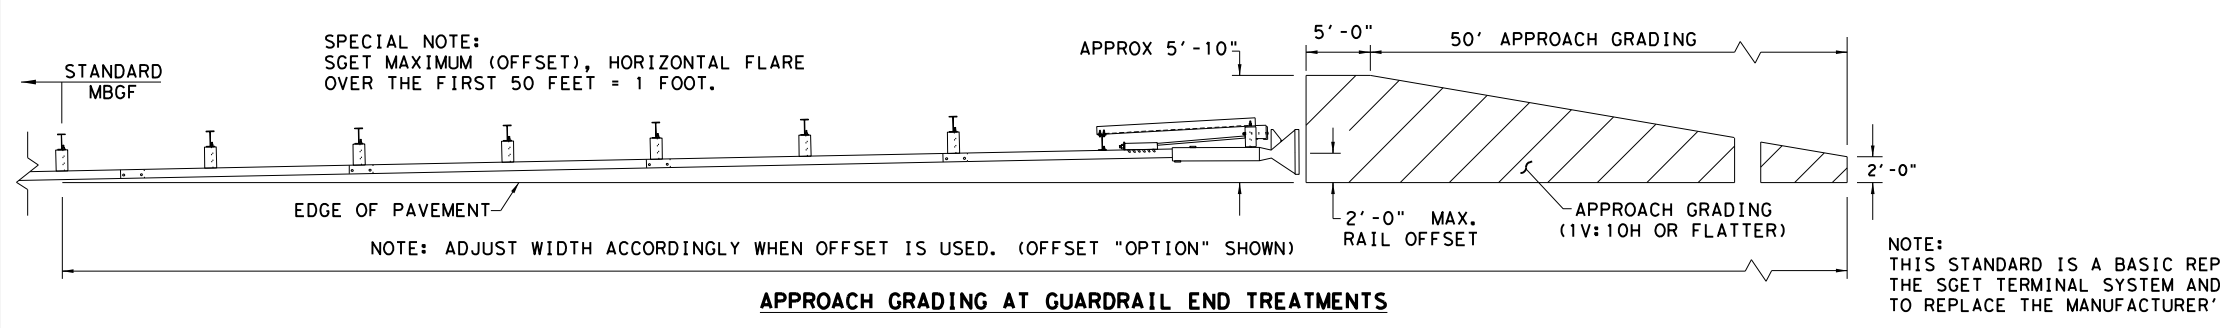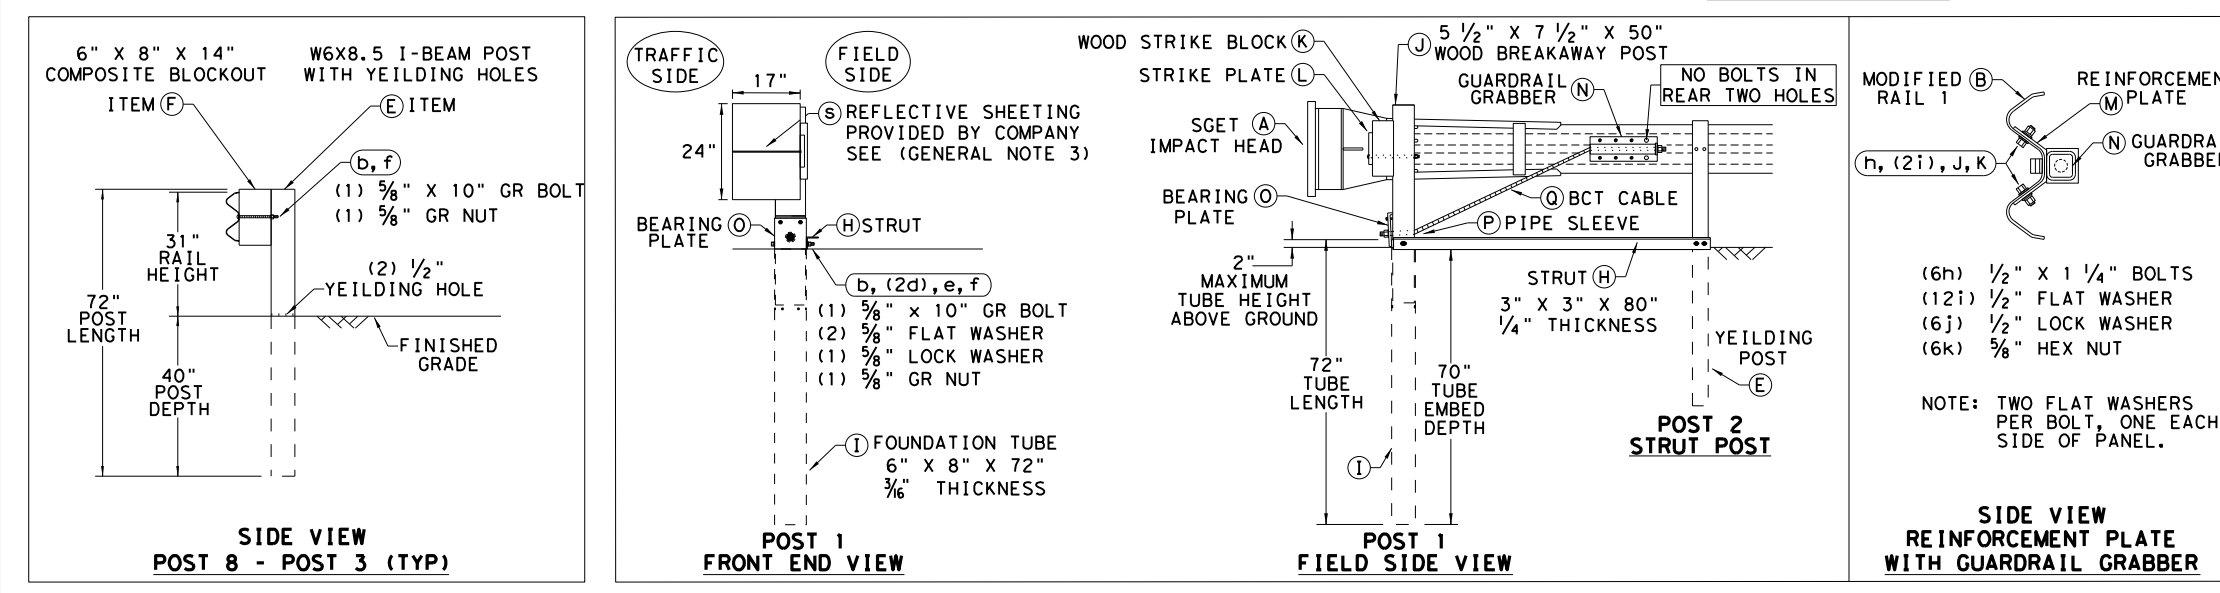


Design Division Standard

SPIG INDUSTRY, LLC
 SINGLE GUARDRAIL TERMINAL
 SGET - TL-3 - MASH
 SGT (15) 31-20


FILE: sg153120.dgn	DN: TXDOT	CK: KM	DW: VP	CK: VP
© TXDOT: APRIL 2020	CONT: 0568	SECT: 01	JOB: 059	HIGHWAY: SH 34
REVISIONS		DIST: DAL	COUNTY: ELLIS	SHEET NO.: 40

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE SGET TERMINAL SYSTEM AND IS NOT INTENDED TO REPLACE THE MANUFACTURER'S ASSEMBLY MANUAL.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use. DATE: 4/12/2022 FILE: \\txdotprojectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\0568010594 - Design\Plan Set\10. Miscellaneous\Sled19.dgn

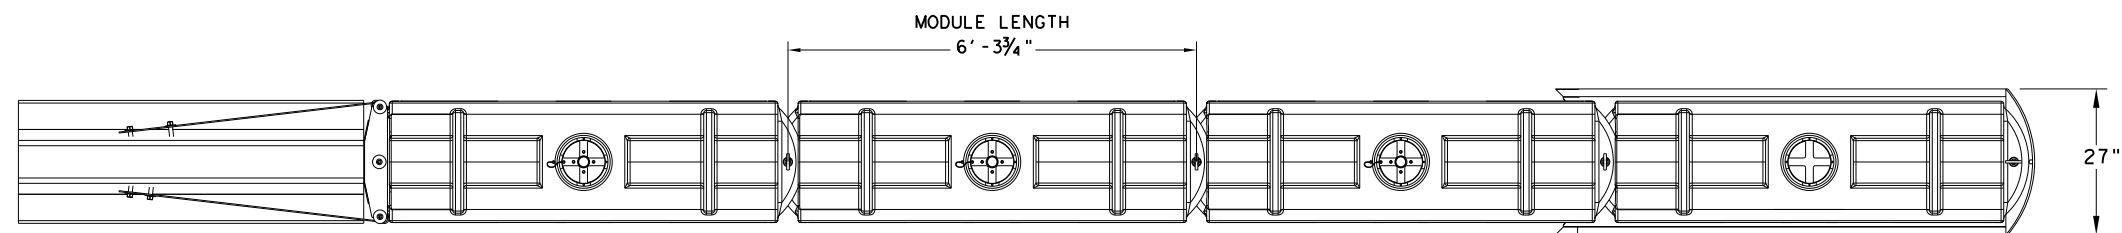


PLAN VIEW

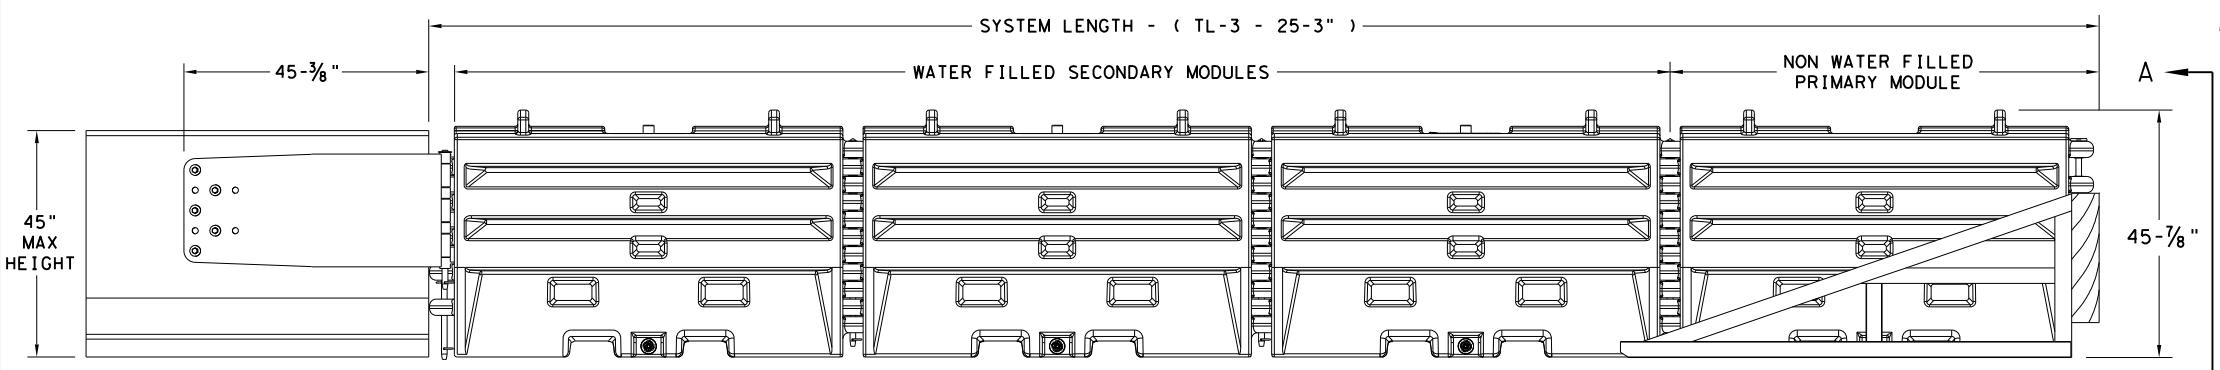


ELEVATION VIEW

GENERAL NOTES

1. REFER TO THE INSTALLATION MANUAL FOR SPECIFIC SYSTEM ASSEMBLY AND MODULE ORIENTATION. FOR ADDITIONAL INFORMATION, CONTACT TRAFFIX, INC. AT (949) 361-5663.
2. THE SLED SYSTEM IS A MASH APPROVED TEST LEVEL 3 (TL-3) CRASH CUSHION APPROVED FOR USE IN TEMPORARY WORK ZONES. THE SLED SYSTEM IS A NON-REDIRECTIVE, GATING CRASH CUSHION THAT DOES NOT NEED TO BE ATTACHED TO THE GROUND AND CAN BE INSTALLED ON CONCRETE, ASPHALT, GRAVEL OR COMPACTED SOIL.
3. MAXIMUM PERMISSIBLE CROSS SLOPE IS 8° (DEGREES) (14%).
4. THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
5. THE SLED SYSTEM CAN BE ATTACHED TO:
 - CONCRETE BARRIER, TEMPORARY OR PERMANENT, 45" MAXIMUM HEIGHT
 - STEEL BARRIER
 - PLASTIC BARRIER
 - CONCRETE BRIDGE ABUTMENTS
 - W-BEAM GUARD RAIL
 - THRIE BEAM GUARD RAIL

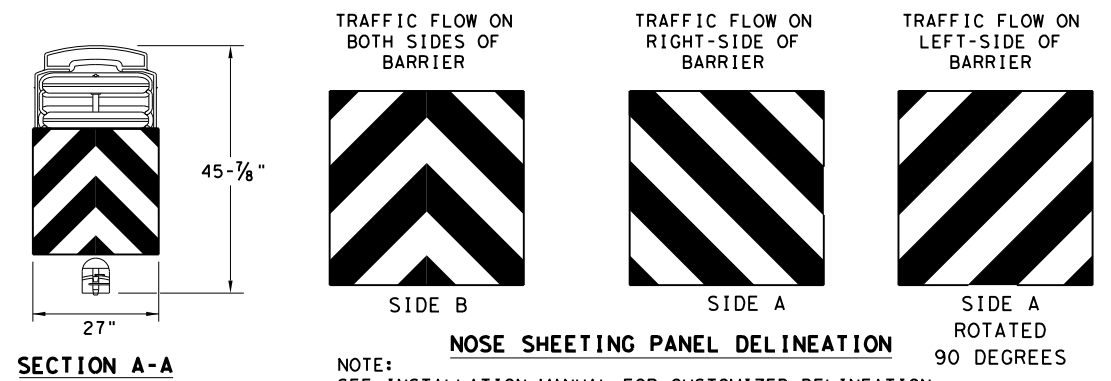

SECTION A-A

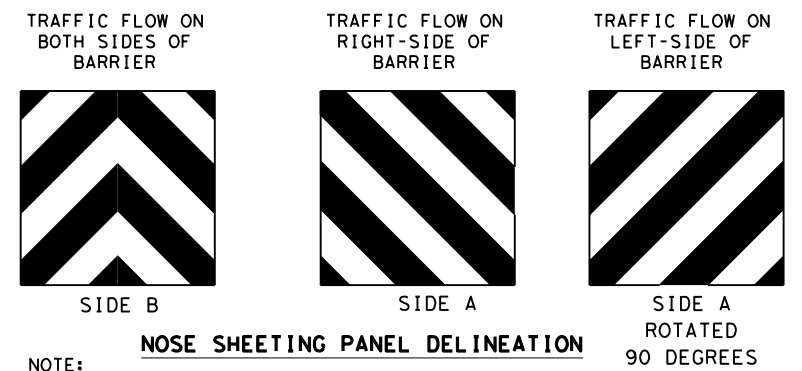


NOSE SHEETING PANEL DELINEATION

NOTE: SEE INSTALLATION MANUAL FOR CUSTOMIZED DELINEATION NOSE SHEETING FOR DECAL PLACEMENT.

TEST LEVEL	NUMBER OF SECONDARY MODULES	SYSTEM LENGTH
TL-3	3	25' 3"

BILL OF MATERIAL		
PART NUMBER	DESCRIPTION	QTY: TL-3
45131	TRANSITION FRAME, GALVANIZED	1
45150	TRANSITION PANEL, GALVANIZED	2
45147-CP	TRANSITION SHORT DROP PIN W/ KEEPER PIN, GALVANIZED	2
45148-CP	TRANSITION LONG DROP PIN W/ KEEPER PIN, GALVANIZED	1
45050	ANCHOR BOLTS	9
12060	WASHER, 3/4" ID X 2" OD	9
45044-Y	SLED YELLOW WATER FILLED MODULE	3
45044-YH	SLED YELLOW "NO FILL" MODULE	1
45044-S	CIS (CONTAINMENT IMPACT SLED), GALVANIZED	1
45043-CP	T-PIN W/ KEEPER PIN	4
18009-B-I	FILL CAP W/ "DRIVE BY" FLOAT INDICATOR	3
45033-RC-B	DRAIN PLUG	3
45032-DPT	DRAIN PLUG REMOVAL TOOL	1

TRANSITION OPTIONS
SLED TRANSITION TO CONCRETE TRAFFIC BARRIER (TEMPORARY OR PERMANENT)
SLED TRANSITION TO STEEL TRAFFIC BARRIER (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO PLASTIC TRAFFIC BARRIER (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO W-BEAM OR THRIE BEAM GUARD RAIL (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO CONCRETE BRIDGE ABUTMENT

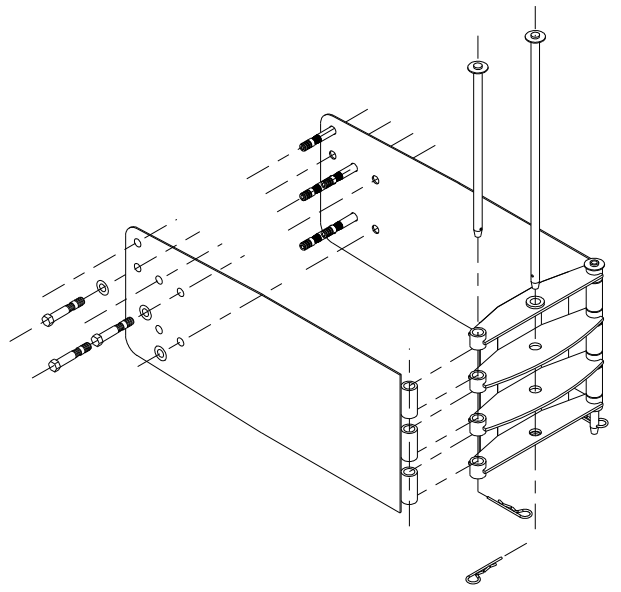

SLED TRANSITION COMPONENTS FOR ATTACHMENT TO CMB

NOTE: SEE MANUFACTURER'S INSTALLATION MANUAL FOR FURTHER DETAILS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE SLED, IT IS NOT INTENDED TO REPLACE THE INSTALLATION INSTRUCTIONS MANUAL.


SACRIFICIAL

Design Division Standard

SLED CRASH CUSHION TL-3 MASH COMPLIANT (TEMPORARY, WORK ZONE) SLED-19


FILE: sled19.dgn	DN: TxDOT	CK: KM	DW: VP	CK:
© TxDOT: DECEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
DIST	COUNTY	SHEET NO.		
DAL	ELLIS			41

FILE: T:\DALBRDG\Brdg Repair\18-071-0568-01-022 Bardwell Repair\Details_2_Rail Retrofit\100% Submission\04-18-2022\2-Approach Slab\Detail.dgn
 DATE: 4/19/2022 TIME: 8:54:17 AM

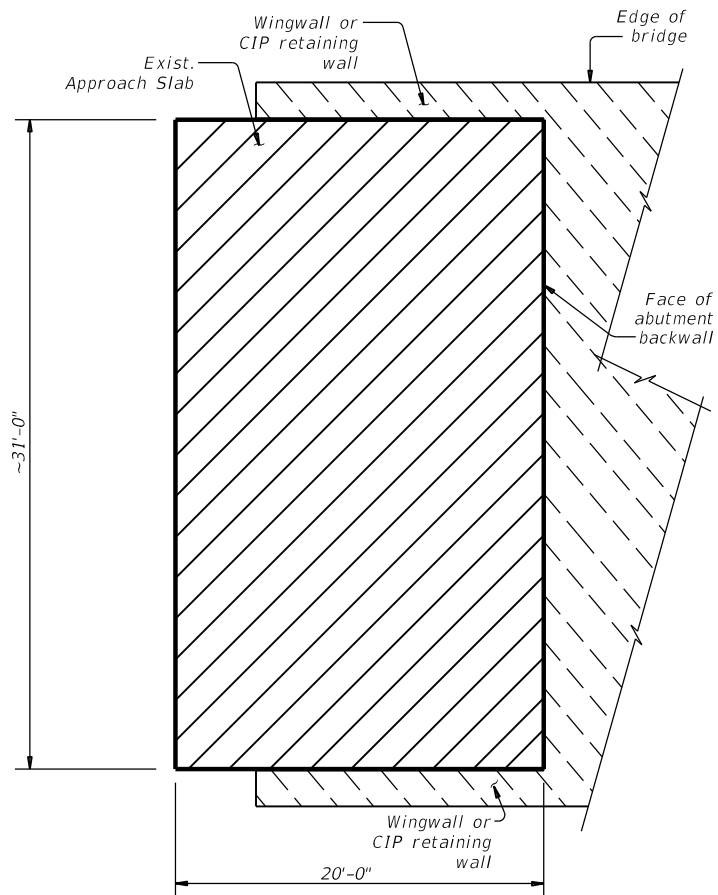

PLAN
(Approach Slab Breakout Details)

~ Removal of Approach Slab

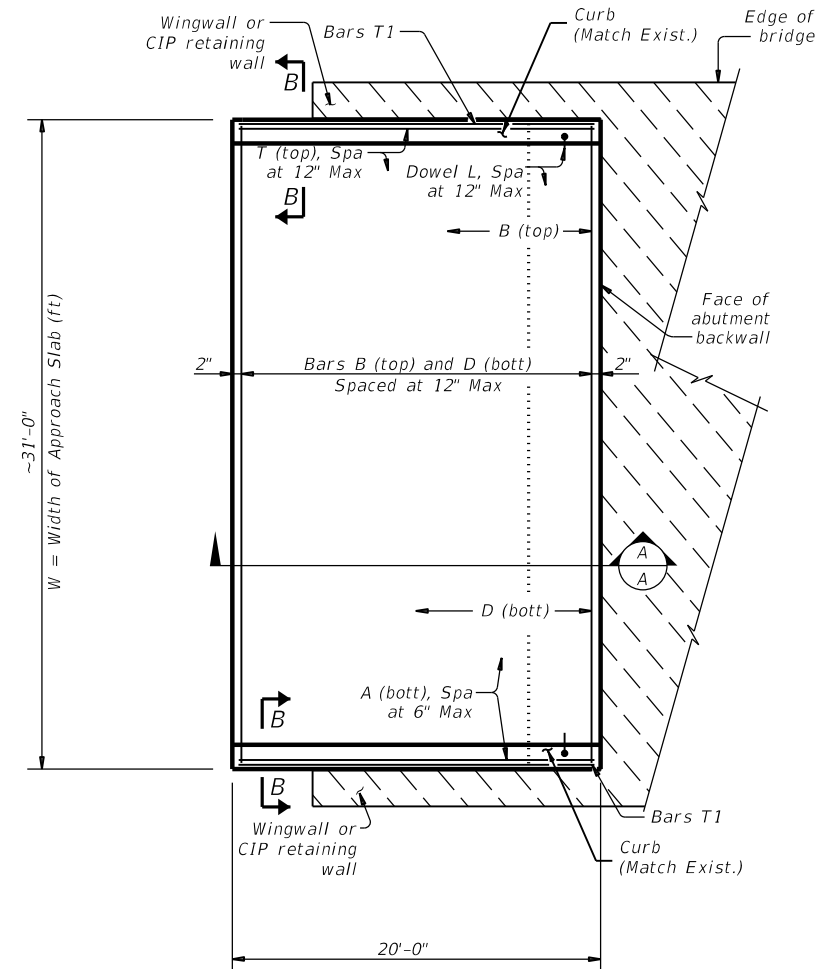


PLAN
(New approach slab)


BAR TABLE	
BAR	SIZE
A	#8
B	#5
D	#5
T	#5
T1	#5
L	#6

NE APPROACH SLAB REPAIR				
* ESTIMATED QUANTITIES				
BAR	NO	SIZE	LENGTH	WEIGHT
A	62	#8	19' - 8"	3,256
B	21	#5	30' - 8"	672
D	21	#5	32' - 8"	715
T	32	#5	19' - 8"	656
T1	4	#5	19' - 8"	82
L	32	#6	1' - 11"	92
REINFORCING STEEL			LBS	5,473
CI S Conc			CY	23.1


* For contractor's information only

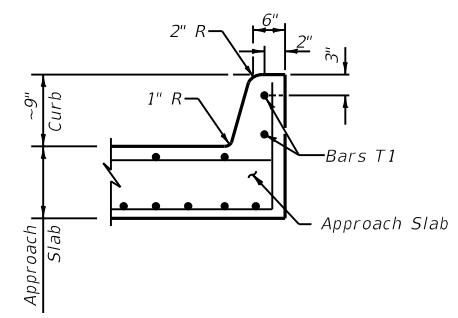


SECTION B-B
(NTS)




SEALED CONSTRUCTION JOINT DETAIL

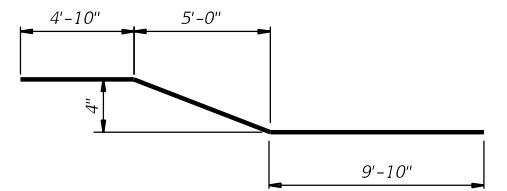

BARS A (#8)

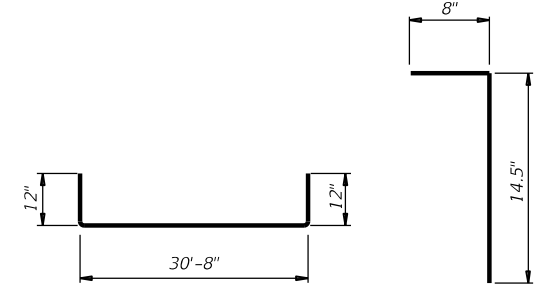

BARS D (#5)




BARS L (#6)

① Place in accordance with Item 438.

GENERAL NOTES:
 Remove and replace approach slab in accordance with Item 422.
 Provide Class "S" concrete with a minimum compressive strength of 4,000 psi.
 Provide Grade 60 reinforcing steel.
 Details and notes not shown here refer to BAS-A.
 For transition rail post, anchor bolts, & drilled shaft locations, see Rail Retrofit Details sheets.

Cover dimensions are clear dimensions, unless noted otherwise.

Repair quantities and locations may vary in the field; limits of repair shall be as directed by the field Engineer.

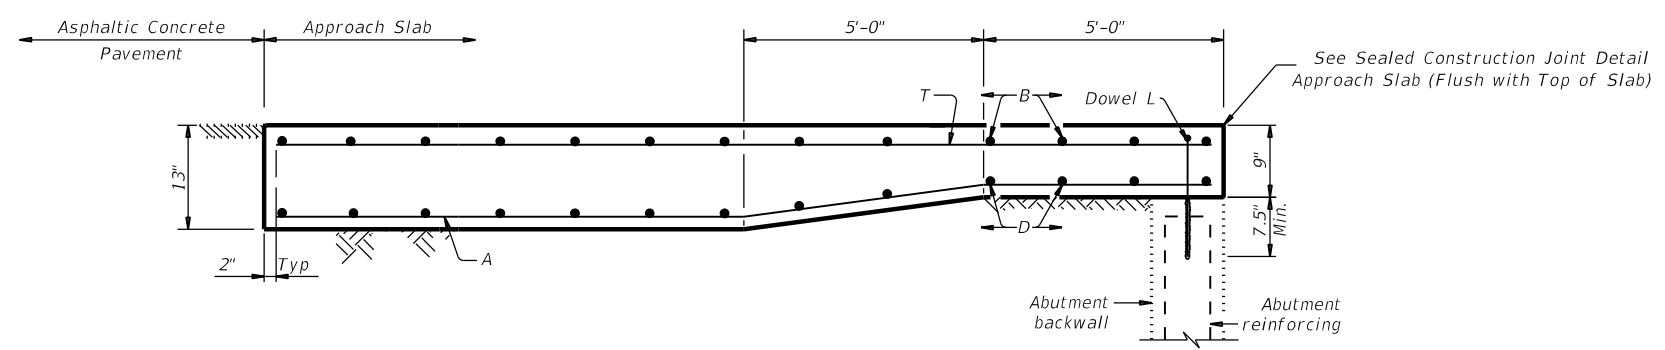


SECTION A-A
(NTS)

DOWELS:

Drill and embed Anchor (#6 Bar L) or equivalent as approved by The Engineer. Embed bars L a minimum of 7 1/2" into existing concrete provide Type III Class C, D, E, or F epoxy meeting the requirements of DMS 6100 "Epoxy and Adhesives". Install per anchor adhesive manufacturer's instructions, including provision for drill diameter, depth, and hole preparation. Bars L (#6) shall fully developed by embedment. Place and orient Bars L as graphically shown to support horizontal reinforcing.


Submit signed and sealed calculations or the manufacturer's published literature showing the proposed anchor adhesive's ability to develop required loads per DMS 6100 to the Engineer for approval prior to use.




Rajasegaram Ranjith
 04/19/2022

Texas Department of Transportation		Dallas District Bridge	
SH 34			
BARDWELL RESERVOIR BRIDGE			
NE APPROACH SLAB DETAILS			
FILE: SEE PATH	DN: MS	CK: MAW	DW: MS
CON: 2022	SECT: 01	JOB: 059	HIGHWAY: SH 34
DIST: DAL	COUNTY: ELLIS	SHEET NO. 42	

FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Details 2_Rail Retrofit\100% Submission\04-18-2022\2-Approach Slab Repair.dgn
 DATE: 4/19/2022 TIME: 8:54:29 AM

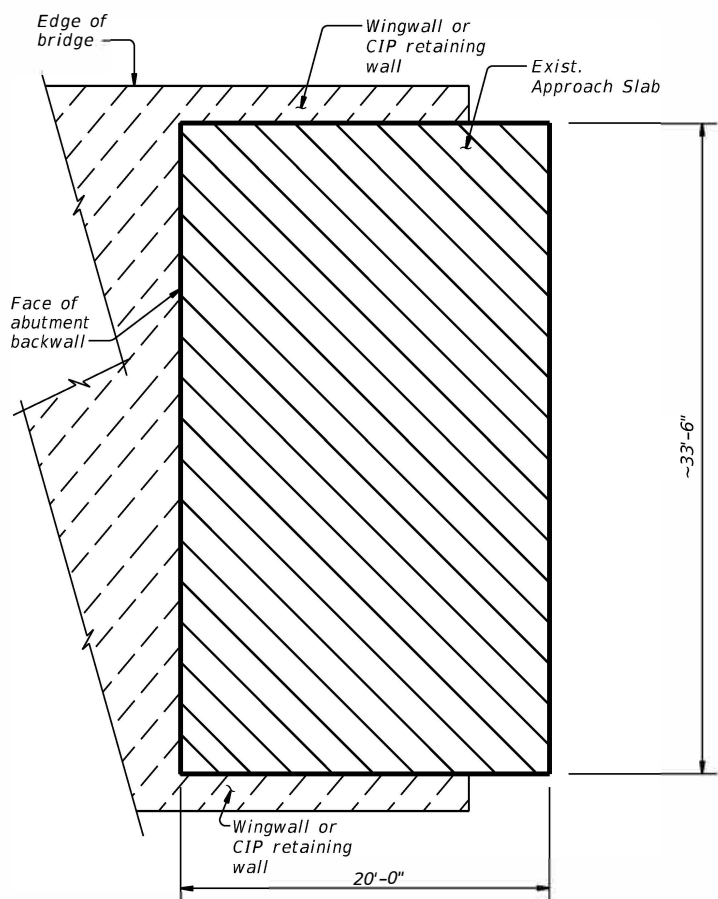


PLAN
(Approach Slab Breakout Details)

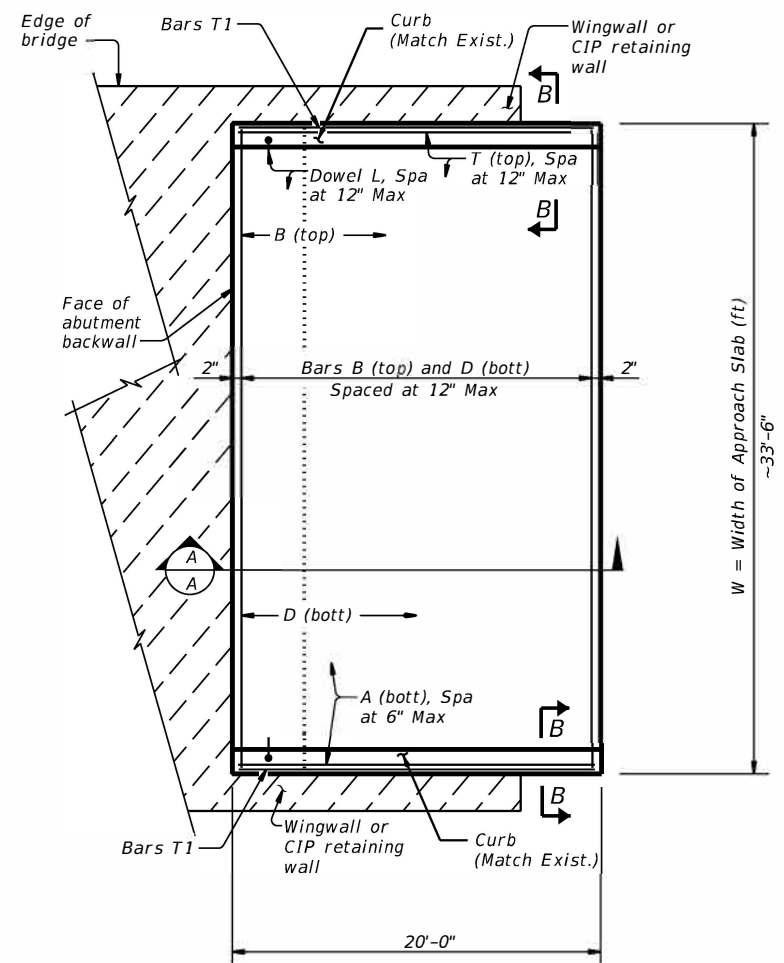

PLAN
(New approach slab.)

~ Removal of Approach Slab

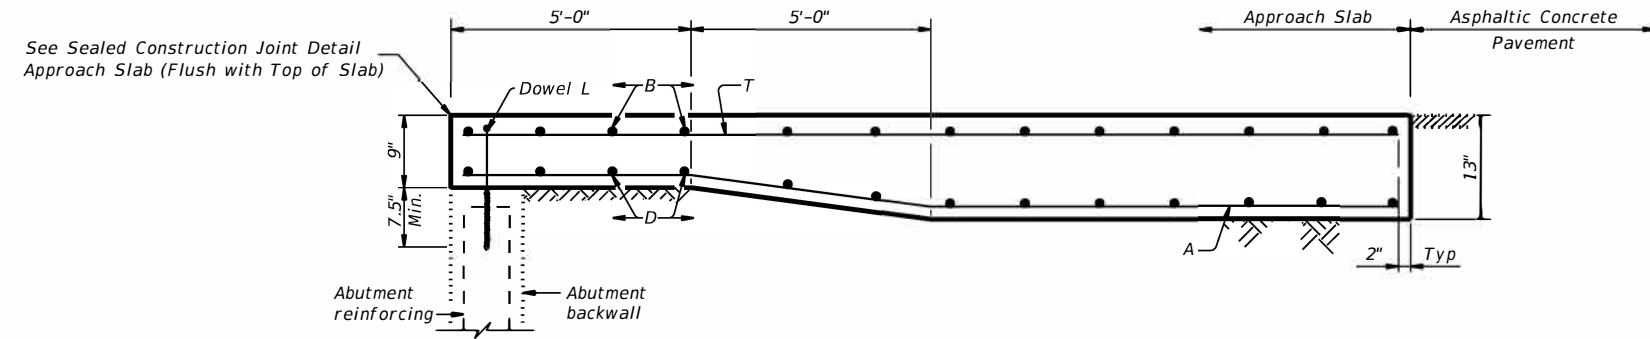



SECTION A-A
(NTS)

DOWELS:


Drill and embed Anchor (#6 Bar L) or equivalent as approved by The Engineer. Embed bars L a minimum of 7 1/2" into existing concrete provide Type III Class C, D, E, or F epoxy meeting the requirements of DMS 6100 "Epoxies and Adhesives". Install per anchor adhesive manufacturer's instructions, including provision for drill diameter, depth, and hole preparation. Bars L (#6) shall fully developed by embedment. Place and orient Bars L as graphically shown to support horizontal reinforcing.

Submit signed and sealed calculations or the manufacturer's published literature showing the proposed anchor adhesive's ability to develop required loads per DMS 6100 to the Engineer for approval prior to use.

BAR TABLE	
BAR	SIZE
A	#8
B	#5
D	#5
T	#5
T1	#5
L	#6

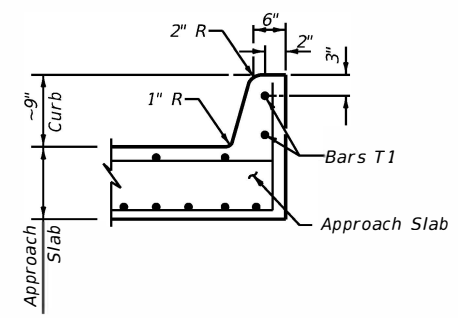


SECTION B-B
(NTS)




SEALED CONSTRUCTION JOINT DETAIL

SW APPROACH SLAB REPAIR				
* ESTIMATED QUANTITIES				
BAR	NO	SIZE	LENGTH	WEIGHT
A	68	#8	19' - 8"	3,571
B	21	#5	33' - 2"	726
D	21	#5	35' - 2"	770
T	35	#5	19' - 8"	718
T1	4	#5	19' - 8"	82
L	35	#6	1' - 11"	101
REINFORCING STEEL			LBS	5,968
CI S Conc			CY	25.1


* For contractor's information only

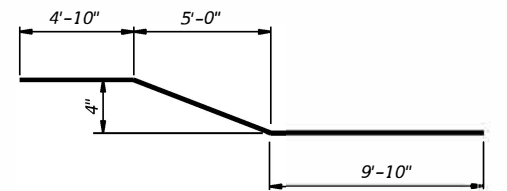

BARS A (#8)

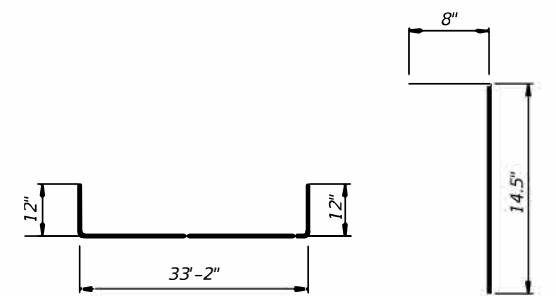

BARS D (#5)




BARS L (#6)

① Place in accordance with Item 438.

GENERAL NOTES:
 Remove and replace approach slab in accordance with Item 422.
 Provide Class "S" concrete with a minimum compressive strength of 4,000 psi.
 Provide Grade 60 reinforcing steel.
 Details and notes not shown here refer to BAS-A.
 For transition rail post, anchor bolts, & drilled shaft locations, see Rail Retrofit Details sheets.

Cover dimensions are clear dimensions, unless noted otherwise.


Repair quantities and locations may vary in the field; limits of repair shall be as directed by the field Engineer.




Rajasegaram Ranjith
 04/19/2022

Texas Department of Transportation		Dallas District Bridge	
SH 34			
BARDWELL RESERVOIR BRIDGE			
SW APPROACH SLAB DETAILS			
FILE: SEE PATH	DN: MS	CK: MAW	DW: MS
©TxDOT 2022	CONT	SECT	JOB
REVISIONS	0568	01	059
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	43	


User: dalbrdg
 FILE: T:\DALBRDG\Bridge Repair\18-071-0568-01-022 Bardwell Repair\Rail retorfit - Option 2\100% Submission\Repair Details.dgn
 DATE: 3/18/2022
 TIME: 1:02:08 PM

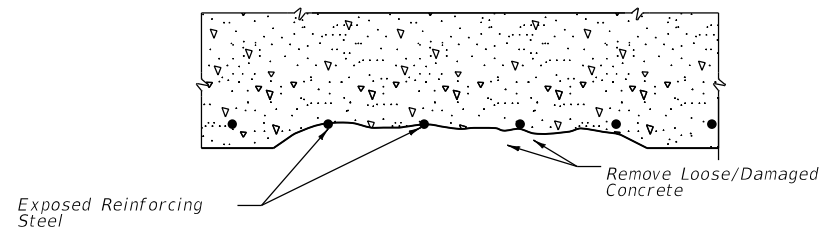

SHOWING DAMAGED CONDITION

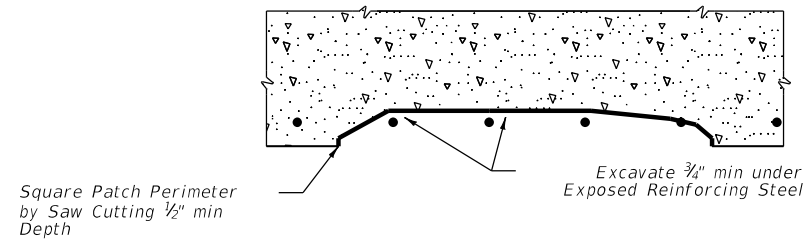

SHOWING EXCAVATION & PREPARATION

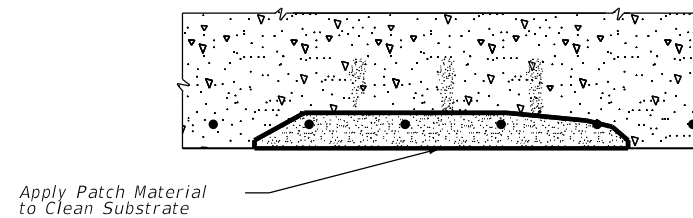


SHOWING PATCHING

CONCRETE STRUCTURE REPAIR (VERTICAL & OVERHEAD)

REPAIR PROCEDURE (CONCRETE, VERTICAL AND OVERHEAD):


1. Damage locations and quantities are based on the bridge inspection performed on March 2019. Immediately notify TxDOT if any discrepancies are noted between the plans and actual conditions.
2. Submit detailed repair procedures, including proposed proprietary materials, for approval prior to commencing work.
3. Some repair areas indicated do not exhibit visible spalling and will need to be identified by sounding the concrete with hammers to determine the location and limits of repairs.
4. Sound all surfaces to identify and mark all delaminated areas for review and approval by the Engineer. Confirm square footage of repair areas prior to commencing removal and notify Engineer of any discrepancies. Provide access to Engineer for verification.
5. Remove delaminated, loose, and unsound concrete. Use only hand tools or power-driven chipping hammers (15 lb. max) to remove concrete and to excavate behind reinforcing bars.
6. Remove rust, oil, and other contaminants from concrete and reinforcing steel surfaces. Prior to patching, abrasive blast the repair area.
7. Use Type C Repair Materials in accordance with DMS-4655.
8. Notify Engineer once existing concrete is removed and repair areas for each structure elements have been prepared. Provide access to the Engineer for verification of prepared repair areas.
9. Perform all repairs in accordance with the Section 3.2 of the "Concrete Repair Manual". Not all de laminations may be visible.
10. Abutments, bent cap, pan girder, bent column, concrete beam with minor repair and bridge deck overhang edge shall be repaired under pay item 429 "CONC STR REPAIR (VERTICAL & OVERHEAD)"




Rajasegaram Ranjith
03/18/2022

		Dallas District Bridge			
<p>SH 34 BARDWELL RESERVOIR CONCRETE AND OVERHEAD REPAIR DETAILS</p>					
FILE:	SEE PATH	DN: RR	CK: RM	DW: RR	CK: RM
©TxDOT	2022	CONT	SECT	JOB	HIGHWAY
REVISIONS		0568	01	059	SH 34
	DIST	COUNTY		SHEET NO.	
	DAL	ELLIS		44	


FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Details_2_Rail Retrofit\100% Submission\04-18-2022\Repair Detail\ddg.dwg
 DATE: 4/19/2022 TIME: 8:09:00 AM

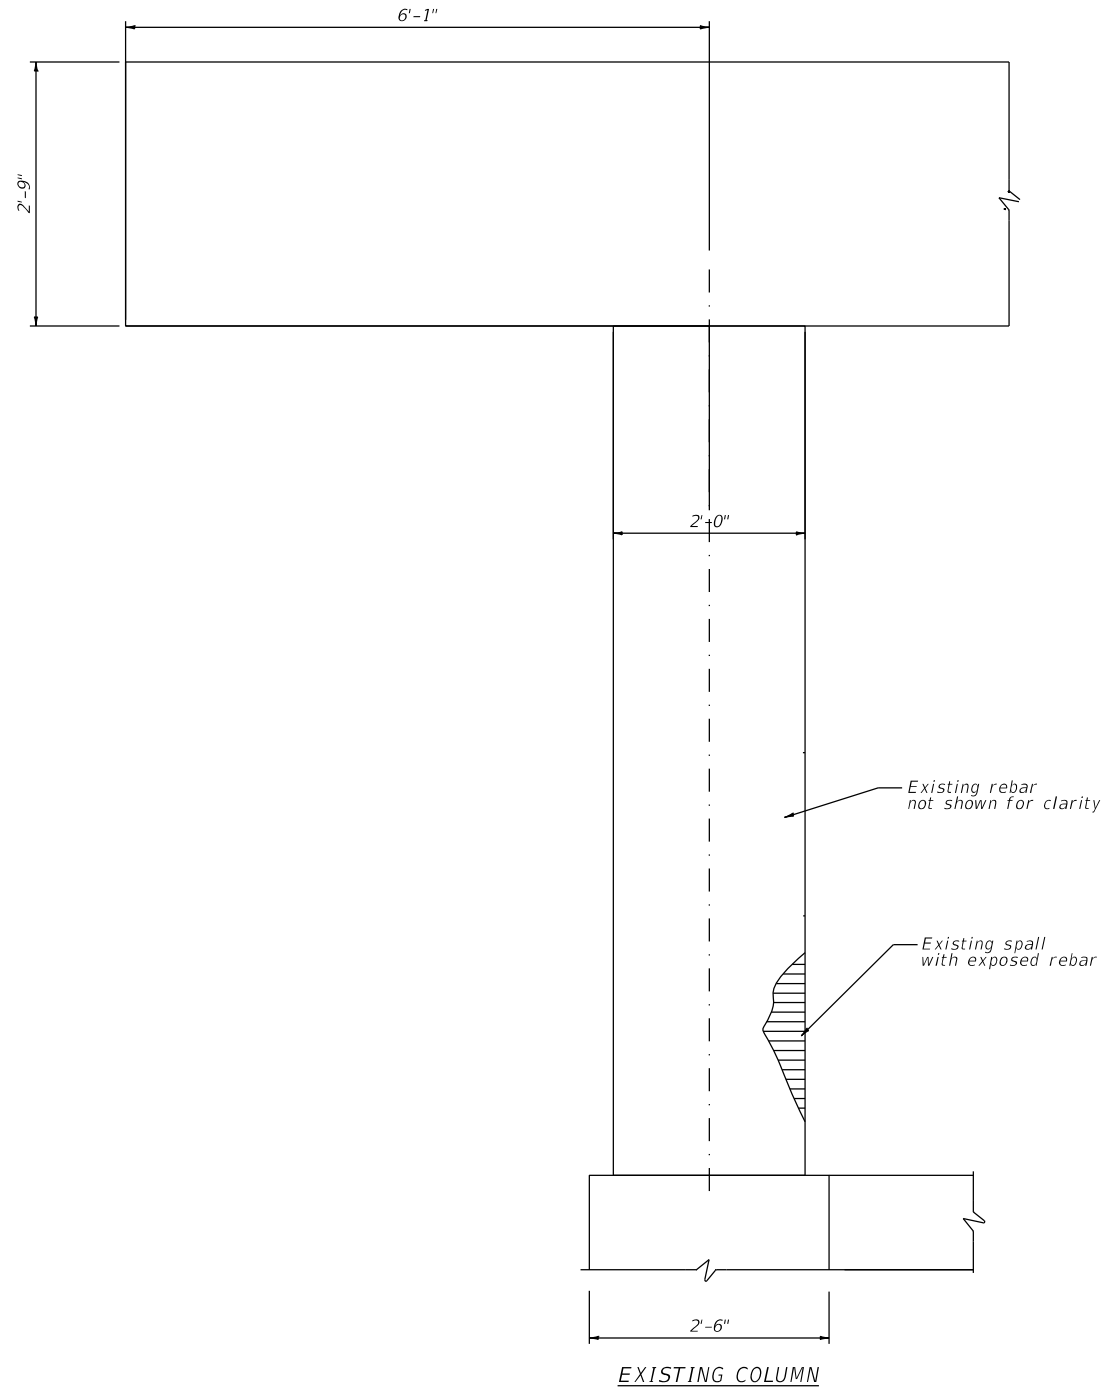


EXISTING COLUMN

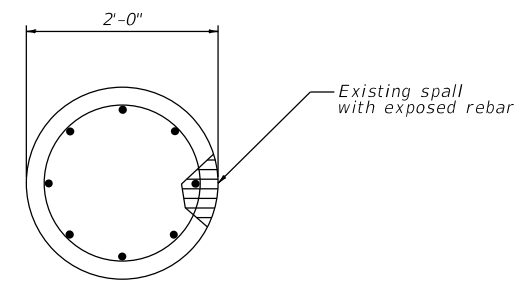

EXISTING COLUMN SECTION BENT 17,41,59,62,81,92,112 & 127

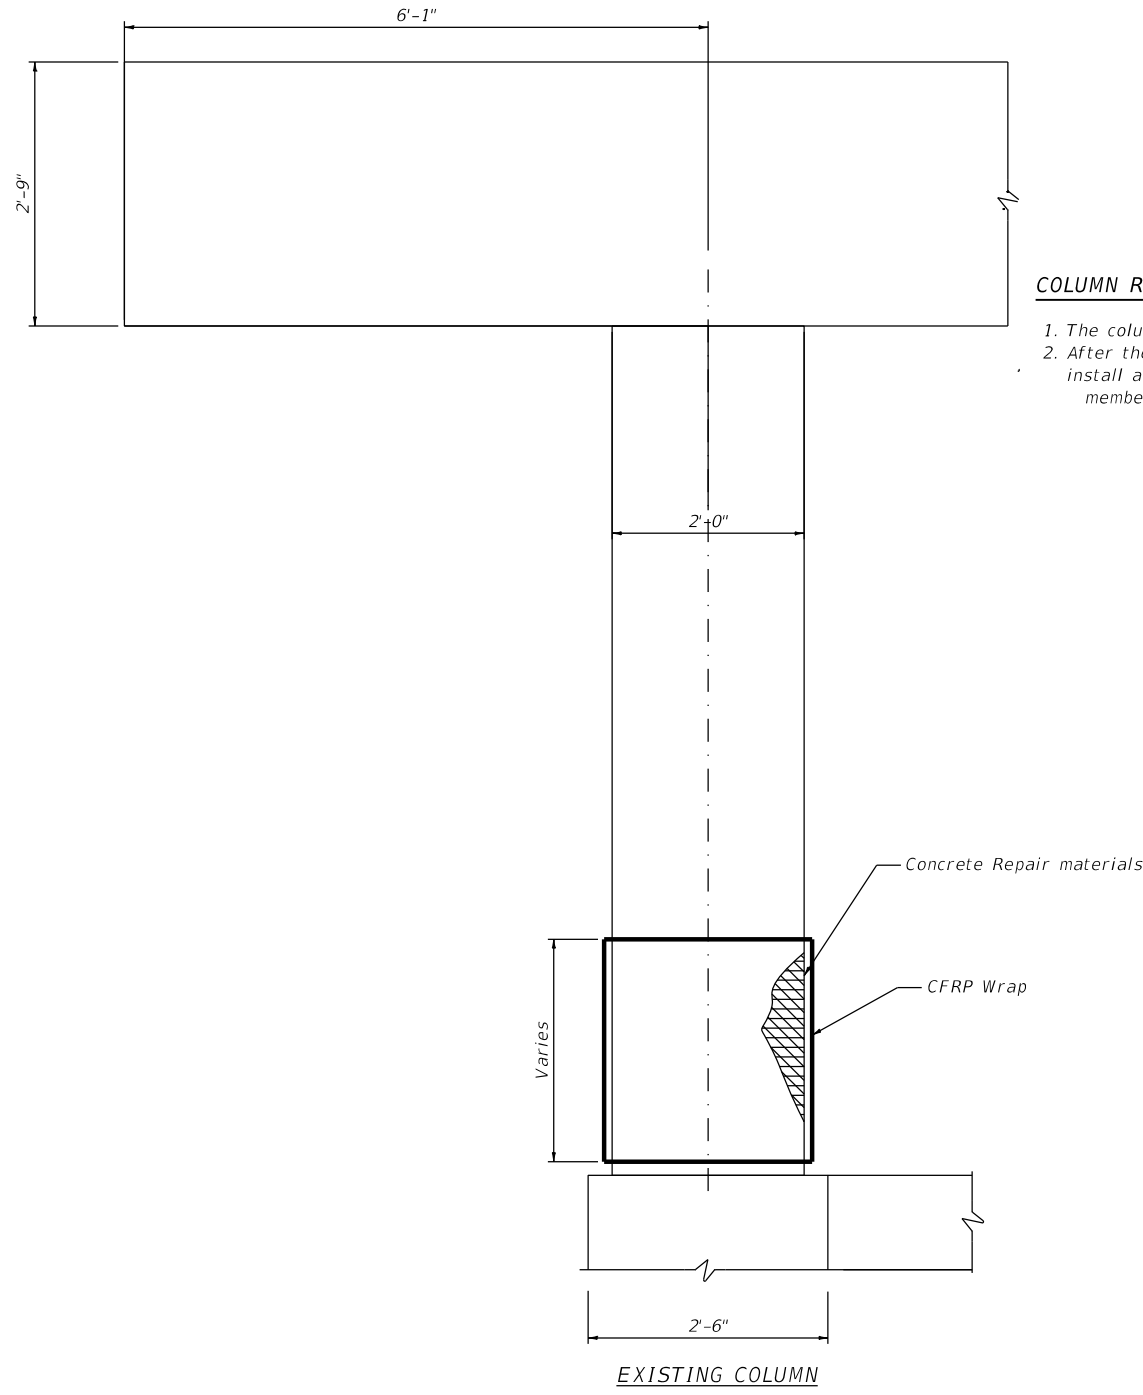


EXISTING COLUMN

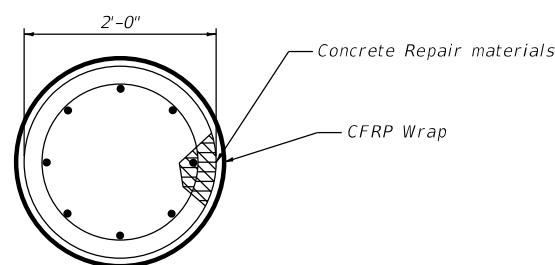

PROPOSED COLUMN REPAIR BENT 17,41,59,62,81,92,112 & 127

COLUMN REPAIR NOTE

1. The column void shall be repaired per item 429 and the Concrete Repair Manual.
2. After the void areas in the columns are cleaned prepared and repaired, install a Carbon Fiber Reinforced Polymer (CFRP) system for protecting concrete member per item 786. Payment will be per item 786.




Rajasegaram Ranjith



04/19/2022

		Dallas District Bridge	
<h2>SH 34</h2> <h3>BARDWELL RESERVOIR</h3> <h3>COLUMN REPAIR DETAILS</h3>			
FILE: SEE PATH	DN: RR	CK: RM	DW: RR
© TxDOT 2022	CONT: 0568	SECT: 01	JOB: SH 34
REVISIONS	DIST: DAL	COUNTY: ELLIS	SHEET NO: 45

DATE: 3/18/2022 TIME: 1:02:30 PM FILE: T:\DALBRDG\Brdge Repair\18-071-0568-01-022 Bardwell Repair\Rail retorfit - Option 2\100% Submission\Repair Details.dgn User: dalbrdg

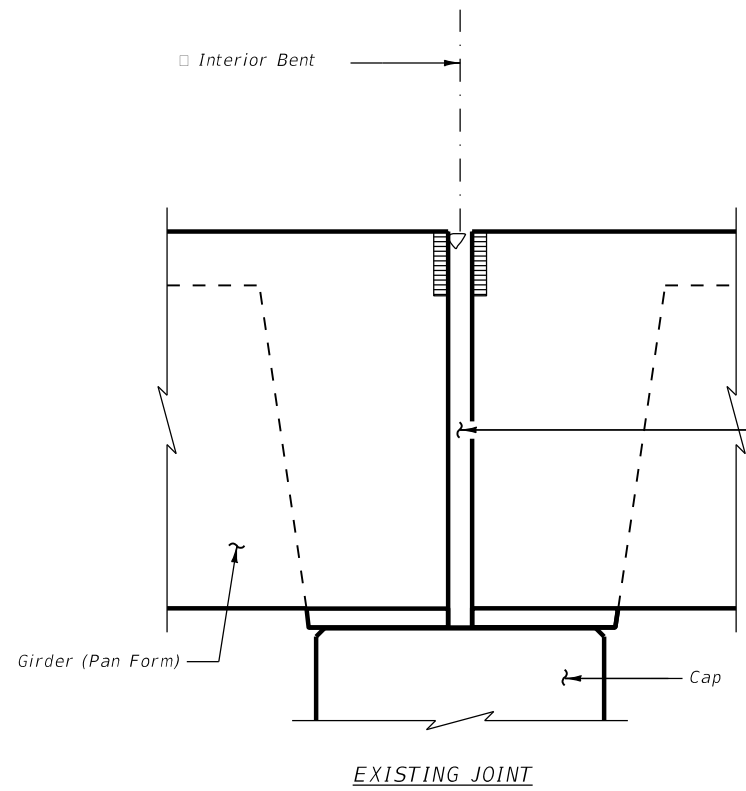


Clean all debris from joint extending down to the top of the cap.

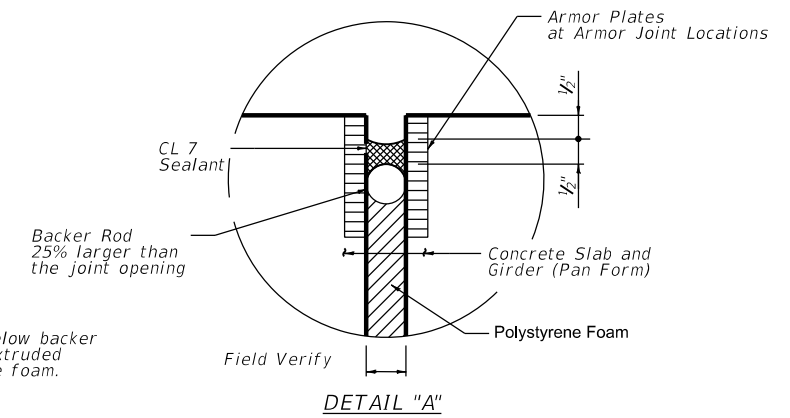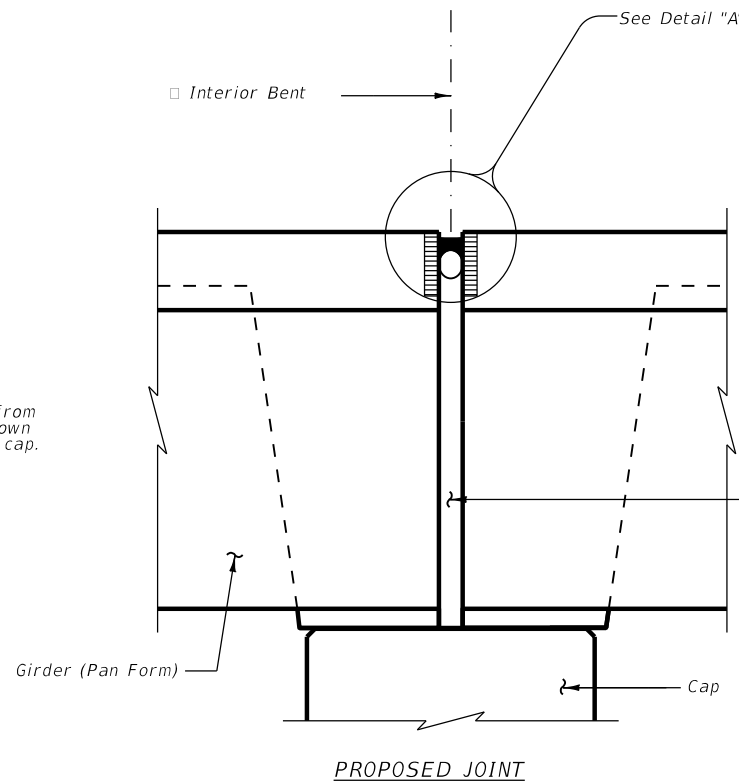


Notes

- 1) Clean joint opening of all old expansion materials/devices, dirt, and all other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints." Clean joint out full depth of the joint.
- 2) Obtain approval of cleaned joint prior to proceeding with joint sealing operation.
- 3) Place backer rod into joint opening 1" below the top of concrete. The backer rod must be 25% larger than the joint opening. When sealing joints for slab spans, pan girder spans, or box beam spans, fill void below backer rod with extruded polystyrene foam.
- 4) Seal the joint opening with a Class 7 Silicone. Recess seal 1/2" below top of concrete in travel lanes and 1/8" below top of concrete in shoulders.




Rajasegaram Ranjith
03/18/2022

		Dallas District Bridge	
<h2>SH 34</h2> <h3>BARDWELL RESERVOIR</h3> <h3>JOINT REPAIR DETAILS</h3>			
FILE: SEE PATH	DN: RR	CK: RM	DW: RR
2022	CONT	SECT	JOB
0568	01	059	SH 34
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	46	

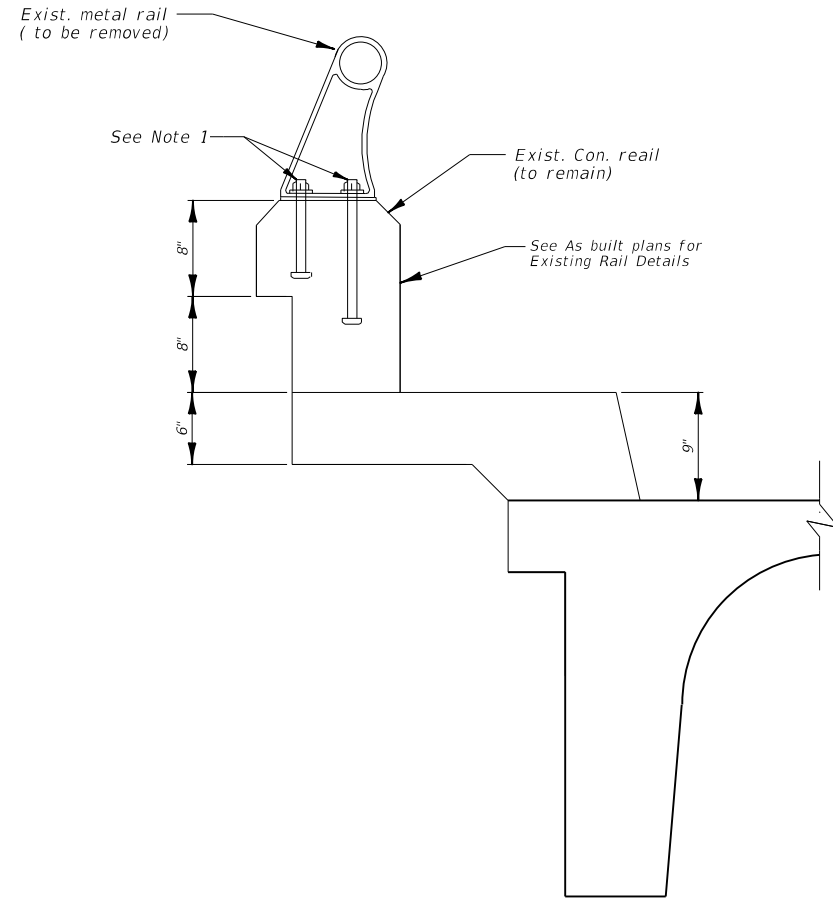


EXISTING RAIL SECTION

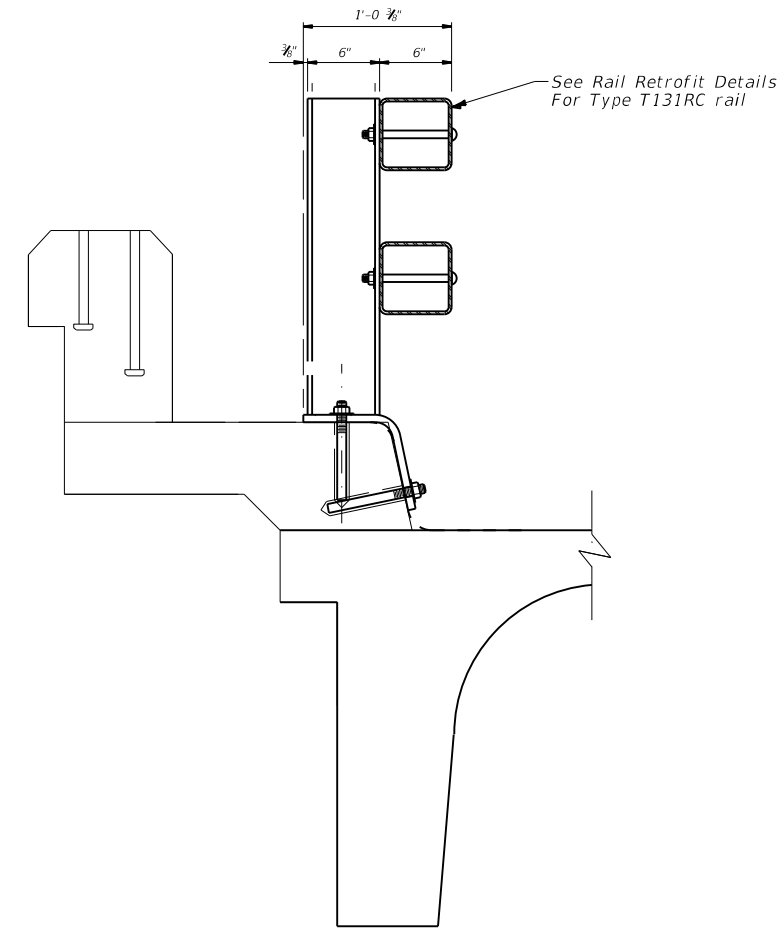

PROPOSED RAIL SECTION

Note:
 1. Remove existing metal railing (including posts), cut and grind anchor bolts flush and paint ends with two coats of zinc-rich paint conforming to the Item "Galvanizing".



Mac Wassef
 09/30/2021

1 of 5


Texas Department of Transportation Dallas District Bridge

SH 34
 BARDWELL RESERVOIR
 RAIL RETROFIT DETAILS


FILE: SEE PATH	DN: MAW	CK: MAW	DW: MAW	CK: MPB
©TxDOT	CONT: 2020	SECT: 01	JOB: 059	HIGHWAY: SH 34
REVISIONS	0568	01	059	SH 34
DIST: DAL	COUNTY: ELLIS	SHEET NO.: 47		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE TIME FILE: DOCUMENT NAME

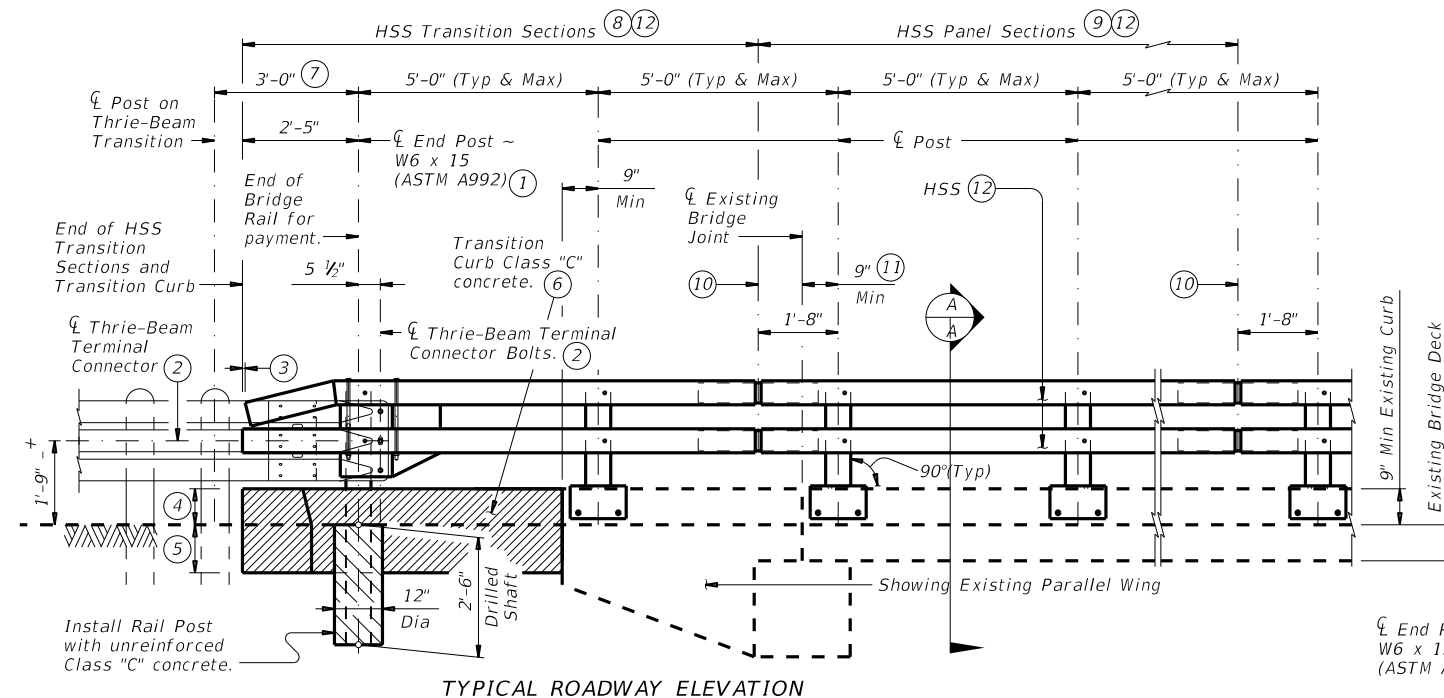

TYPICAL ROADWAY ELEVATION

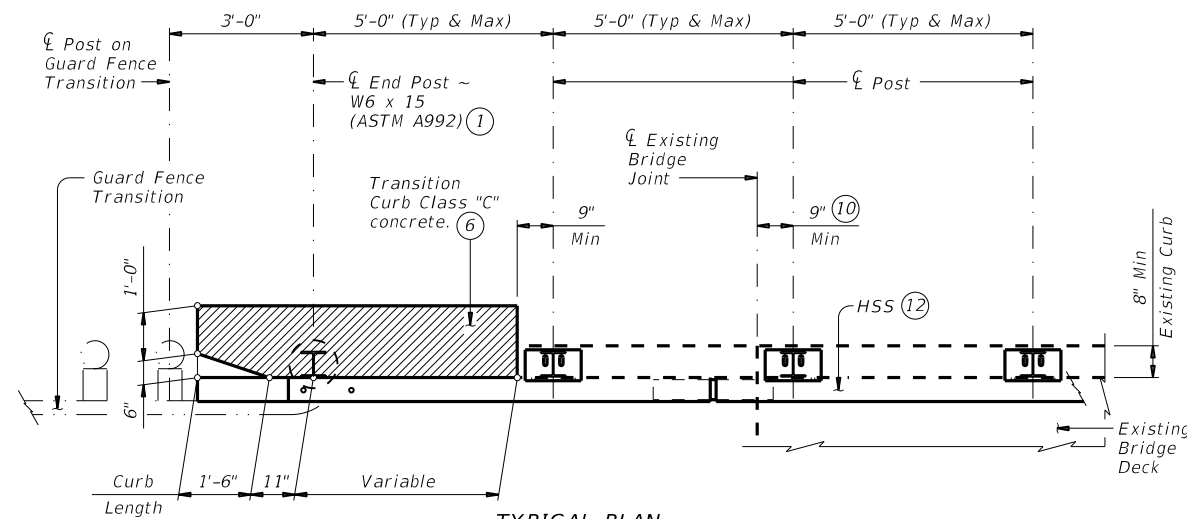


TYPICAL PLAN

EXAMPLE "A" RETROFIT WITH PARALLEL WING

(Showing 9" high and 8" wide curbs, higher and wider curbs similar)

- 1 Post length = Top of rail elevation minus bottom of drilled shaft elevation.
- 2 Terminal Connectors and associated hardware are to be paid for under the Item "Metal Beam Guard Fence". Attach the appropriate Metal Beam Guard Fence Transitions or Downstream Anchor Terminal to the bridge rail using 3 bolts as shown, and extend along the embankment.
- 3 Top HSS can be shorter than bottom HSS 1/8" plus or minus.
- 4 Match existing bridge curb height.
- 5 Cast transition curb 1'-0" into soil or top of concrete approach slab. Remove any asphaltic concrete or mow strip if present.
- 6 Match existing bridge curb face on traffic side of transition curb. Transition curb 6" x 1'-6" taper will remain vertical.
- 7 Showing first post for a TL-3 rated guard fence transition. First post for a TL-2 rated guard fence transition or a guard fence downstream anchor terminal is 4'-4 3/4".
- 8 HSS Transition Sections must have one soil mounted end post embedded in an unreinforced, Class "C" concrete drilled shaft as shown, and a minimum of one curb mounted post per transition section.
- 9 HSS Panel Sections must have a minimum of three posts and a maximum of eight posts per panel section.
- 10 End of HSS Expansion Joint or End of HSS Splice Joint as required.
- 11 Use 9" minimum for both expansion joints and construction/controlled joints.
- 12 HSS 6 x 6 x 1/4 (ASTM A1085 or A500 Gr C).
- 13 May be placed on either side of W6 x 15 web.

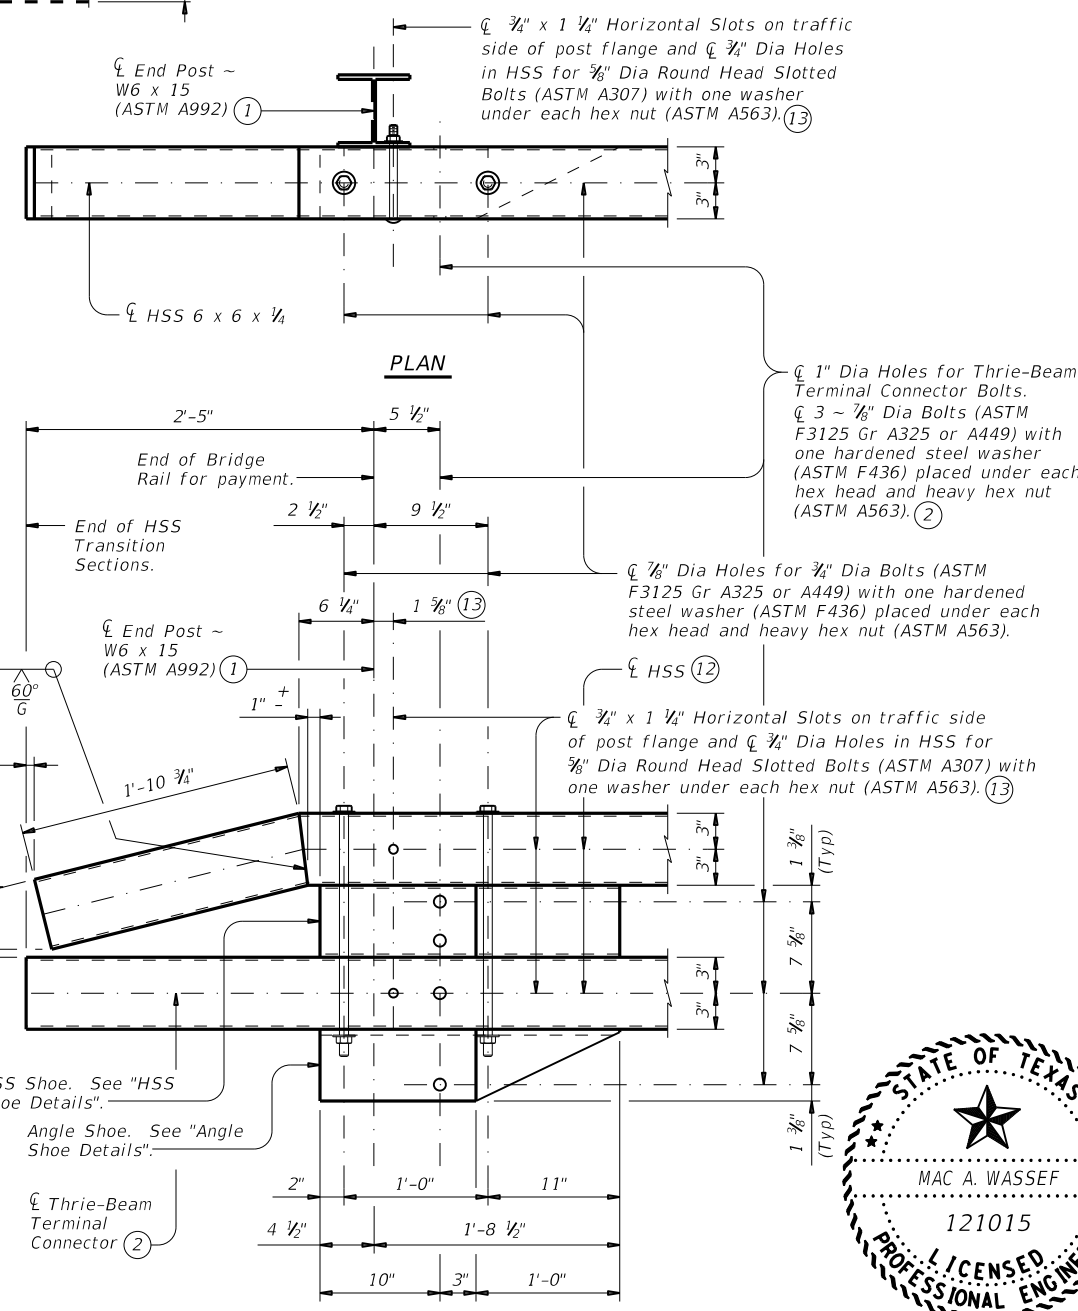

ROADWAY ELEVATION

HSS TRANSITION SECTION END DETAILS


Thrie-Beam Terminal Connector not shown for clarity.

CONSTRUCTION NOTES:
 Field verify dimensions before commencing work and ordering materials.
 Provide Type VIII epoxy mortar under post base plates if gaps larger than 1/16" exist.
 One shop splice per rail member section is permitted with minimum 85 percent penetration.
 The weld may be square groove or single vee groove.
 Round or chamfer exposed edges of HSS rail, rail post and plate to approximately 1/16" by grinding.
 Test adhesive anchors in accordance with Item 450.3.3, "Tests". Test 3 anchors per 100 anchors installed. Perform corrective measures to provide adequate capacity if any of the tests do not meet the required test load. Repair damage from testing as directed.
 Submit erection drawings showing panel lengths, splice locations, post placement, anchor bolt locations and adhesive anchor test data to demonstrate pullout strength to the Engineer for approval. Shop drawings are not required.

MATERIAL NOTES:
 Galvanize all metal components of steel rail system.
 Provide Grade 60 reinforcing steel.
 Provide Class "C" concrete. As an alternate, provide Class "K" concrete, or a Type A-2 or Type C concrete repair material per DMS-4655 "Concrete Repair Materials". Do not use Type "B" (Ultra-Rapid) concrete repair materials.
 Anchor bolts must be 3/4" Dia ASTM A193 Gr B7 or ASTM A449 fully threaded rods with one heavy hex nut and one hardened steel washer (ASTM F436) each. Nuts must conform to ASTM A563 requirements. Embed fully threaded rods into concrete curb using a Type III, Class C, D, E, or F anchor adhesive. Minimum adhesive anchor embedment depth is 6 3/4". Anchor adhesive chosen must be able to achieve a basic bond strength in tension, Nba, of 30 kips. Submit signed and sealed calculations or the manufacturer's published literature showing the proposed anchor adhesive's ability to develop this load to the Engineer for approval prior to use. Anchor installation, including hole size, drilling, and clean out, must be in accordance with Item 450, "Railing".

GENERAL NOTES:
 This retrofit railing has been successfully evaluated by full-scale crash test to meet MASH TL-3 criteria. This retrofit railing can be used for speeds of 50 mph and greater when a TL-3 rated guard fence transition is used. When a TL-2 rated guard fence transition is used, this rail can only be used for speeds of 45 mph and less.
 Rail anchorage details shown on this guide may require modification for select structure types.
 See "Section A-A" for limits on existing overlay/seal coats thickness based on existing curb height.
 This rail is to be paid for as "Retrofit Rail (Ty T131RC)" under Item 451 "Retrofit Railing".
 Average weight with no overlay: 55 plf (9", 11" & 12" Curbs)
 53 plf (18" Curbs)

Cover dimensions are clear dimensions, unless noted otherwise.




Mac Wassef
 09/30/2021


SHEET 2 OF 5

		Bridge Division Standard	
RETROFIT GUIDE FOR			
T131RC RAIL ON CURBS			
TYPE T131RC (MOD)			
FILE: r1std034-19.dgn	DN: TxDOT	CK: JMH	DW: JTR
REVISIONS	CONTRACT	SECTION	JOB
0568	01	059	34
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	48	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

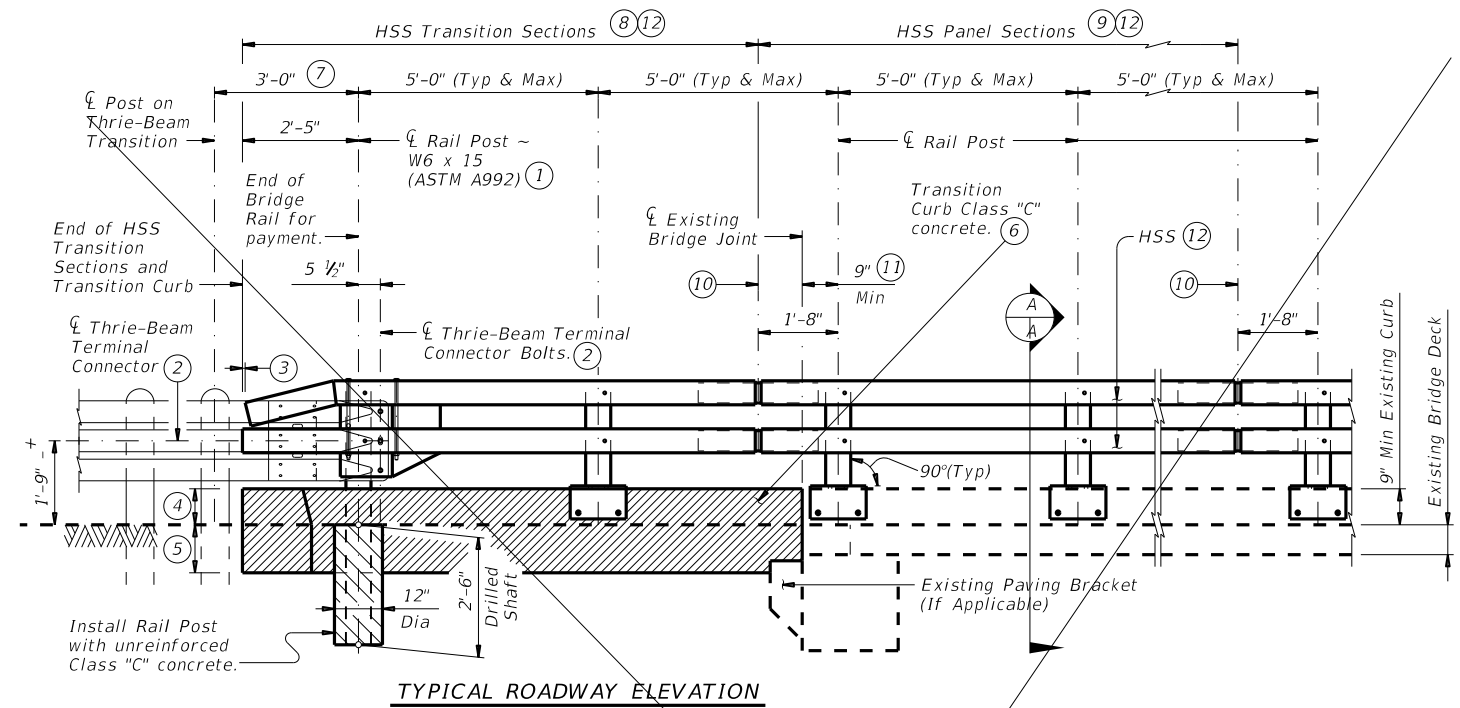

TYPICAL ROADWAY ELEVATION

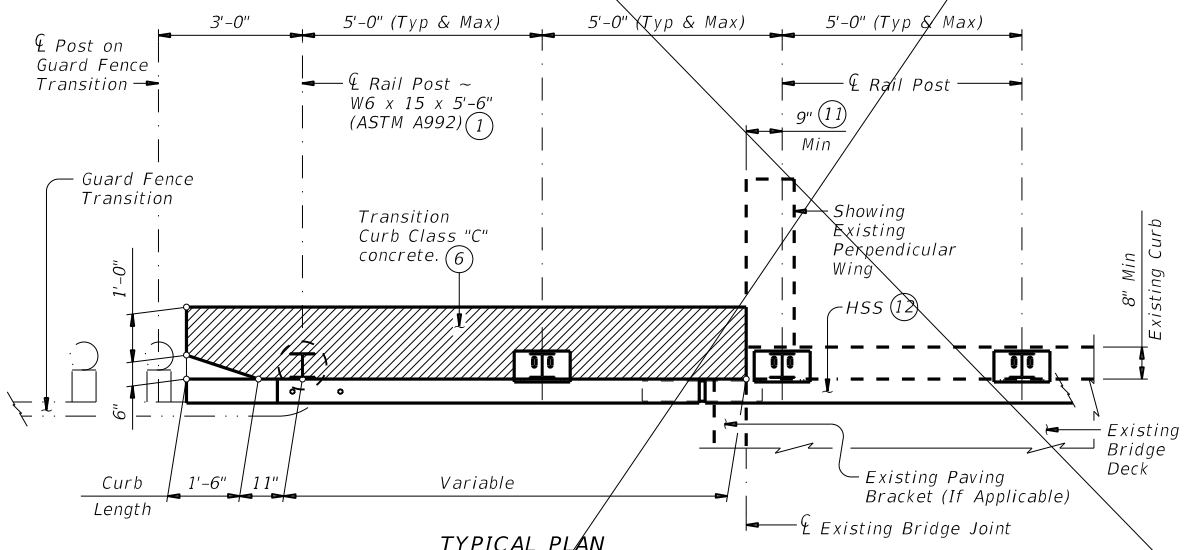


TYPICAL PLAN

EXAMPLE "B" RETROFIT WITH PERPENDICULAR WING


(Showing 9" high and 8" wide curbs, higher and wider curbs similar)

- 1 Post length = Top of rail elevation minus bottom of drilled shaft elevation.
- 2 Terminal Connectors and associated hardware are to be paid for under the Item "Metal Beam Guard Fence". Attach the appropriate Metal Beam Guard Fence Transitions or Downstream Anchor Terminal to the bridge rail using 3 bolts as shown, and extend along the embankment.
- 3 Top HSS can be shorter than bottom HSS 3/8" plus or minus.
- 4 Match existing bridge curb height.
- 5 Cast transition curb 1'-0" into soil or top of concrete approach slab. Remove any asphaltic concrete or mow strip if present.
- 6 Match existing bridge curb face on traffic side of transition curb. Transition curb 6" x 1'-6" taper will remain vertical.
- 7 Showing first post for a TL-3 rated guard fence transition. First post for a TL-2 rated guard fence transition or a guard fence downstream anchor terminal is 4'-4 3/4".
- 8 HSS Transition Sections must have one soil mounted end post embedded in an unreinforced, Class "C" concrete drilled shaft as shown, and a minimum of one curb mounted post per transition section.
- 9 HSS Panel Sections must have a minimum of three posts and a maximum of eight posts per panel section.
- 10 HSS Expansion Joint or HSS Splice Joint as required.
- 11 Use 9" minimum for both expansion joints and construction/controlled joints.
- 12 HSS 6 x 6 x 1/4 (ASTM A1085 or A500 Gr C).
- 13 May be placed on either side of W6 x 15 web.
- 14 Place HSS Expansion Joints in rail at every slab Expansion Joint. For Expansion and Splice Joints openings, use the greater of 1" or (slab opening plus 1/2").

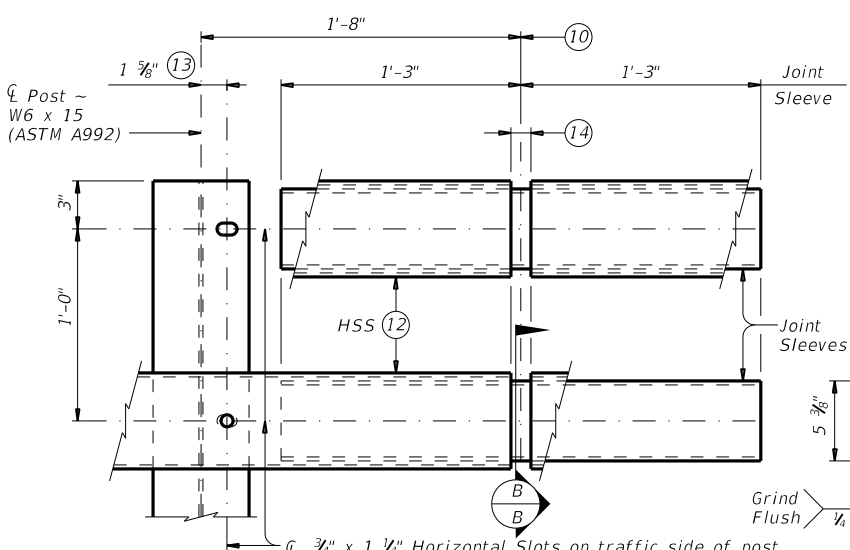


TYPICAL POST CONNECTION AND SPLICE DETAIL FOR HSS

Showing post with HSS and HSS splice.

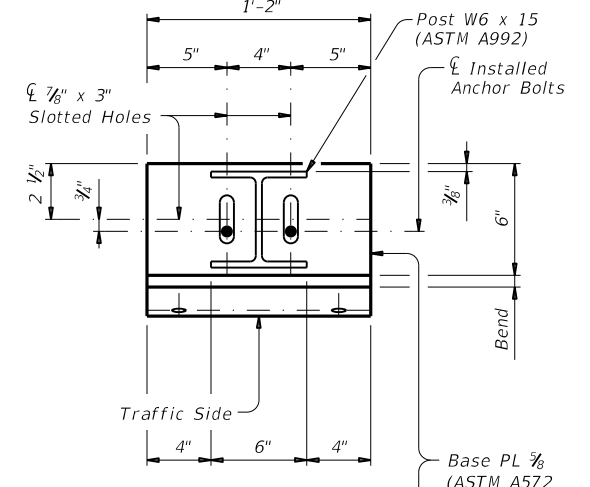


TOP VIEW

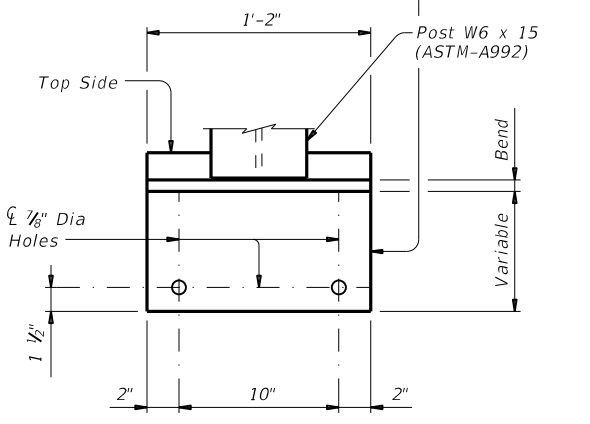


FRONT VIEW

BASE PLATE DETAILS

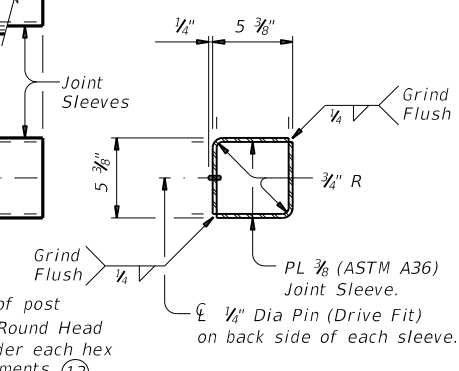


SECTION B-B

Showing typical joint sleeve.



Mac Wassef

09/30/2021
SHEET 3 OF 5

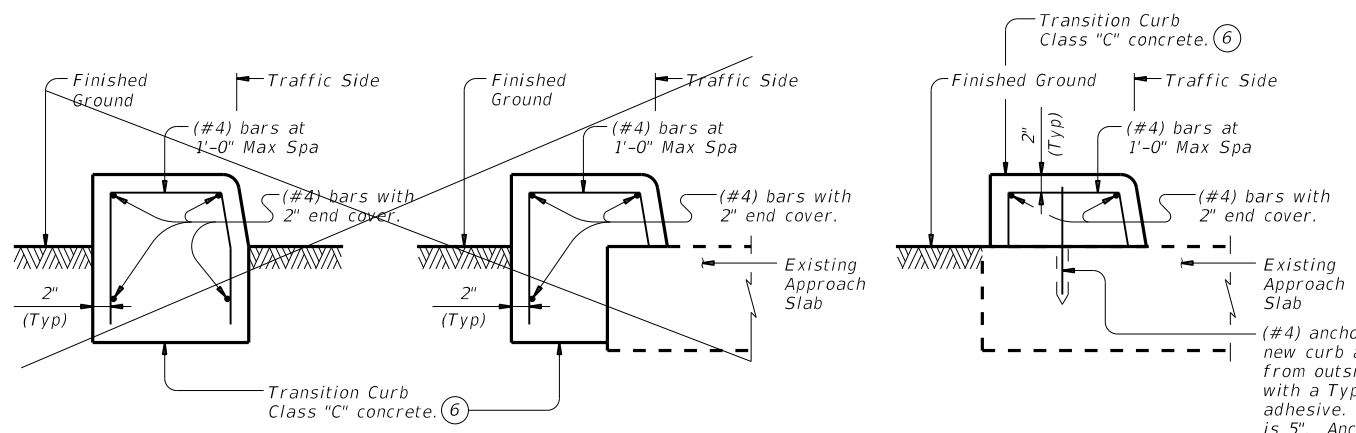

EXAMPLES OF TRANSITION CURB SECTIONS


(#4) anchor bars spaced longitudinally along new curb at 1'-6" Max (Spaced 3" longitudinally from outside edge). Embed (#4) anchor bars with a Type III Class C, D, E, or F anchor adhesive. Minimum adhesive anchor embedment is 5". Anchor installation, including hole size, drilling, and clean out, must be in accordance with Item 450, "Railing".

Texas Department of Transportation		Bridge Division Standard	
RETROFIT GUIDE FOR			
T131RC RAIL ON CURBS			
TYPE T131RC (MOD)			
FILE: r1std034-19.dgn	DN: TxDOT	CK: JMH	DW: JTR
REVISIONS	CONTRACT	SECTION	JOB
0568	01	059	34
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	49	


DATE TIME
DATE: DOCUMENT NAME
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
 TIME:
 FILE:
 DOCUMENT NAME

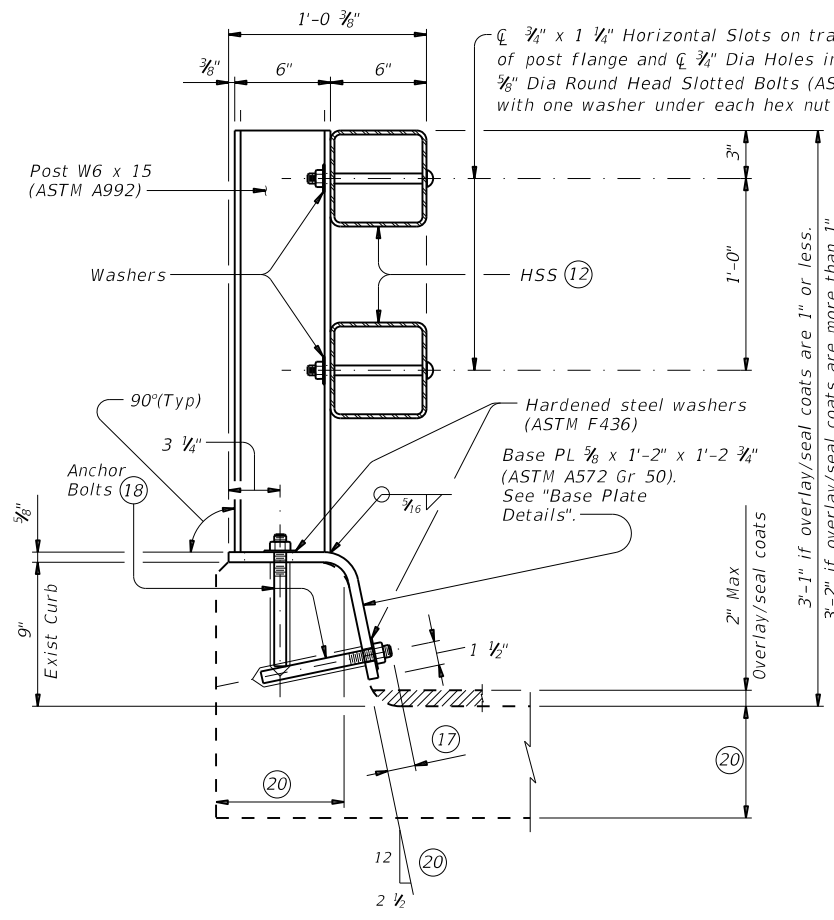


SECTION A-A OF 9" HIGH CURBS
(Showing example of 8" Min width curb, wider curbs similar)

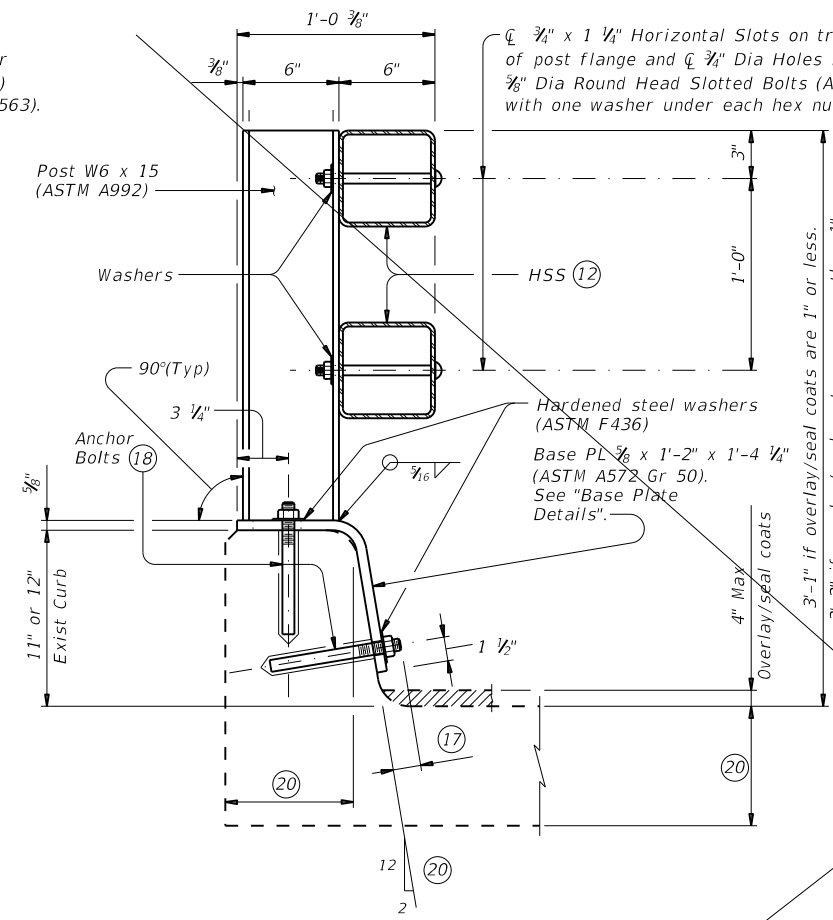


SECTION A-A OF 11" & 12" HIGH CURBS
(Showing example of 8" Min width curb, wider curbs similar)

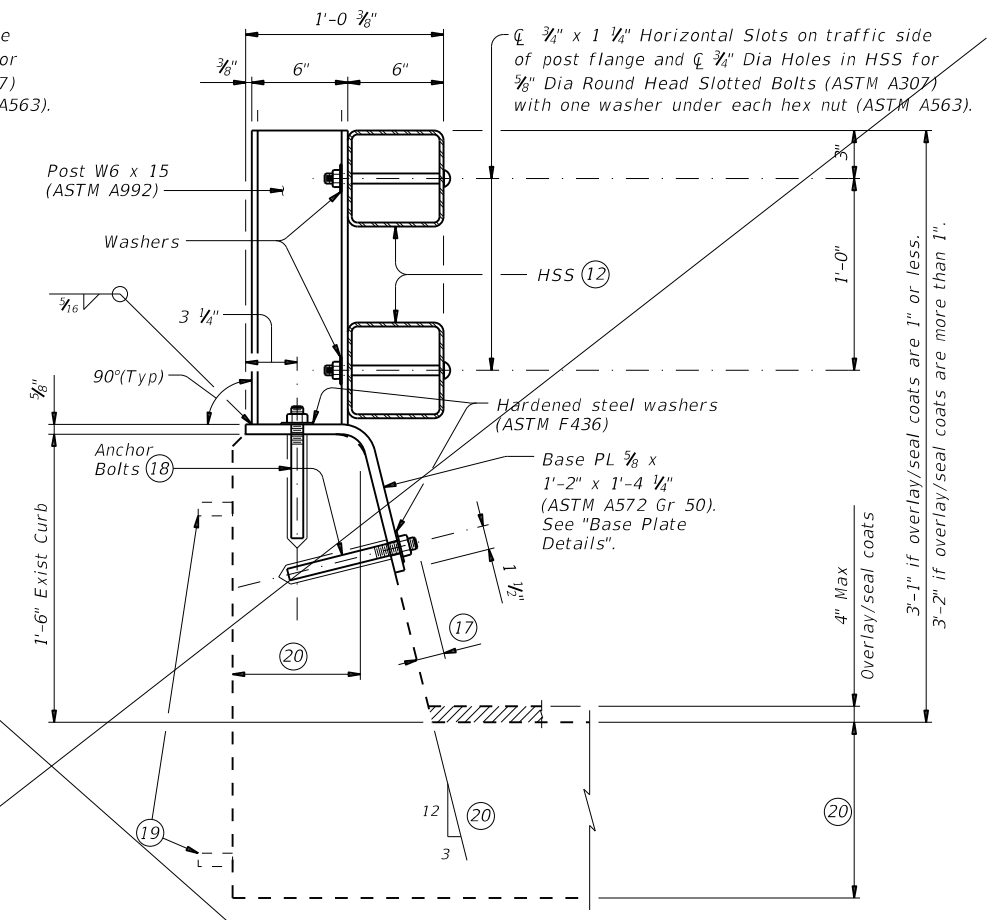


SECTION A-A OF 18" HIGH CURBS
(Showing example of 8" Min width curb, wider curbs similar)

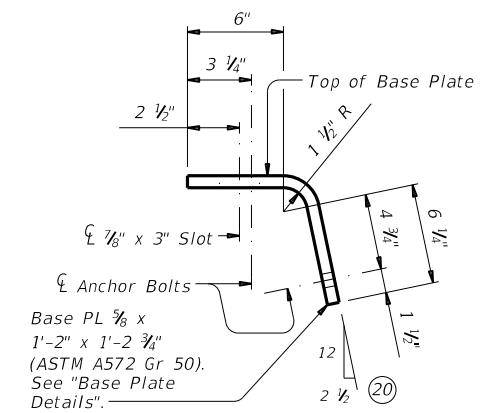

9" HIGH CURB BASE PLATE DETAIL

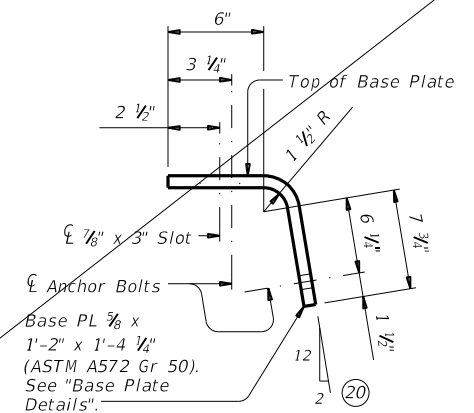


11" & 12" HIGH CURB BASE PLATE DETAIL

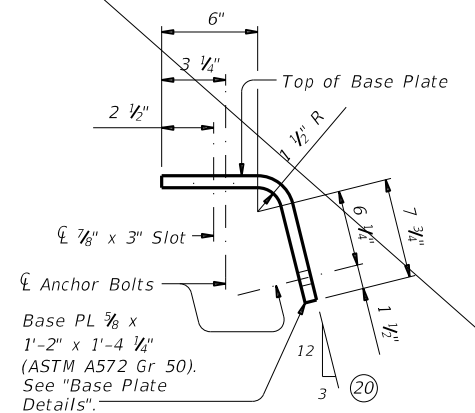

18" HIGH CURB BASE PLATE DETAIL

- ⑫ HSS 6 x 6 x 1/4 (ASTM A1085 or A500 Gr C).
- ⑬ 1 3/4" Bolt Projection (Typ).
- ⑭ See "Material Notes" for anchor Bolt information.
- ⑮ See elsewhere in plans for dimensions (curb width and height, slab and overlay thickness). Slope of curb may differ from what is shown. Adjust base plate as necessary to conform to curb face geometry.







Mac Wassef
09/30/2021

		Bridge Division Standard	
RETROFIT GUIDE FOR			
T131RC RAIL ON CURBS			
TYPE T131RC (MOD)			
FILE: r1std034-19.dgn	DN: TxDOT	CK: JMH	DW: JTR
©TxDOT September 2019	CONT: 0568	SECT: 01	JOB: 059
REVISIONS			HIGHWAY: 34
DIST: DAL	COUNTY: ELLIS	SHEET NO: 50	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: TIME: FILE: DOCUMENT NAME

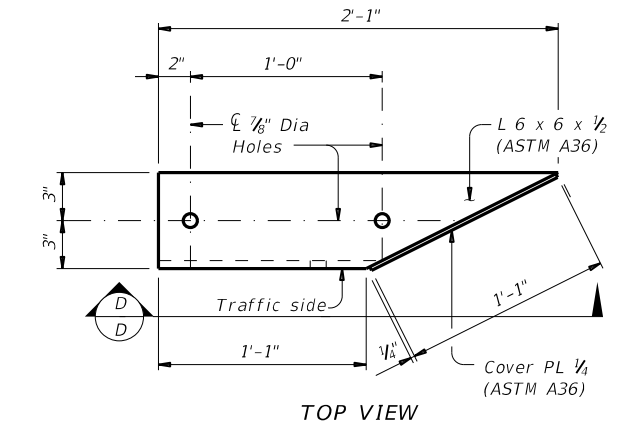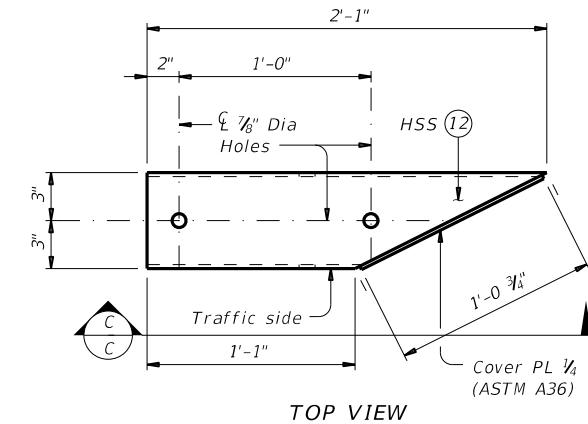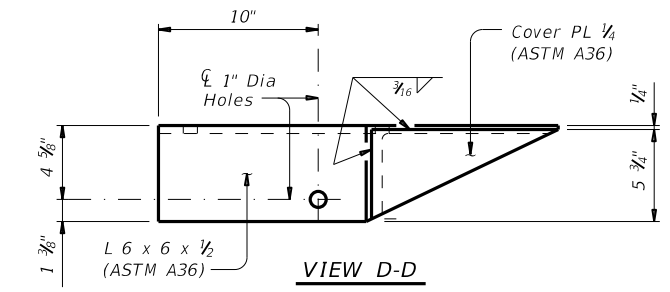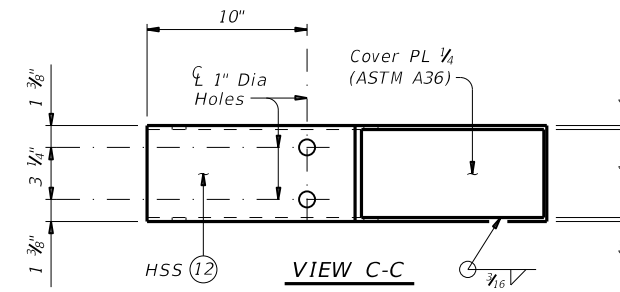


HSS SHOE DETAILS

ANGLE SHOE DETAILS

Angle Shoe shown is detailed for one side only, other side similar. For other side shoe must be built for opposite hand.

- 1 Post length = Top of rail elevation minus bottom of drilled shaft elevation.
- 2 Terminal Connectors and associated hardware are to be paid for under the Item "Metal Beam Guard Fence". The appropriate Metal Beam Guard Fence Transitions or Downstream Anchor Terminal must be attached to the bridge rail and extended along the embankment.
- 3 Top HSS can be shorter than bottom HSS 3/8" plus or minus.
- 4 Match existing bridge curb height.
- 5 Cast transition curb 1'-0" into soil or top of concrete approach slab. Remove any asphaltic concrete or mow strip if present.
- 6 Match existing bridge curb face on traffic side of transition curb. Transition curb 6" x 1'-6" taper will remain vertical.
- 7 Showing first post for a TL-3 rated guard fence transition. First post for a TL-2 rated guard fence transition or a guard fence downstream anchor terminal is 4'-4 3/4".
- 8 HSS Transition Sections must have one soil mounted end post embedded in an unreinforced, Class "C" concrete drilled shaft as shown, and a minimum of one curb mounted post per transition section.
- 9 HSS Panel Sections must have a minimum of three posts and a maximum of eight posts per panel section.
- 10 L HSS Expansion Joint or L HSS Splice Joint as required.
- 11 Use 9" minimum for both expansion joints and construction/controlled joints.
- 12 HSS 6 x 6 x 1/4 (ASTM A1085 or A500 Gr C).
- 15 Remove all existing structure area from top of existing curb. Cut and grind flush all existing reinforcing extending from top of existing curb and paint ends with two coats of zinc-rich paint conforming to the Item "Galvanizing".
- 16 When post is mounted to the transition curb on flared wings as shown, transition curb must be supported laterally by the existing wingwall/curb.




Mac Wassef
09/30/2021

SHEET 5 OF 5

		Bridge Division Standard	
RETROFIT GUIDE FOR T131RC RAIL ON CURBS TYPE T131RC (MOD)			
FILE: r1std034-19.dgn	DN: TxDOT	CK: JMH	DW: JTR
©TxDOT September 2019	CONT: 0568	SECT: 01	JOB: 059
REVISIONS			HIGHWAY: 34
DIST: DAL	COUNTY: ELLIS	SHEET NO.: 51	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information shown on this drawing.

DATE: 02/27/2022 3:04:30 PM
 FILE: PROJECTS\0568010594\Drawings\Bridges\Bas-A.dgn

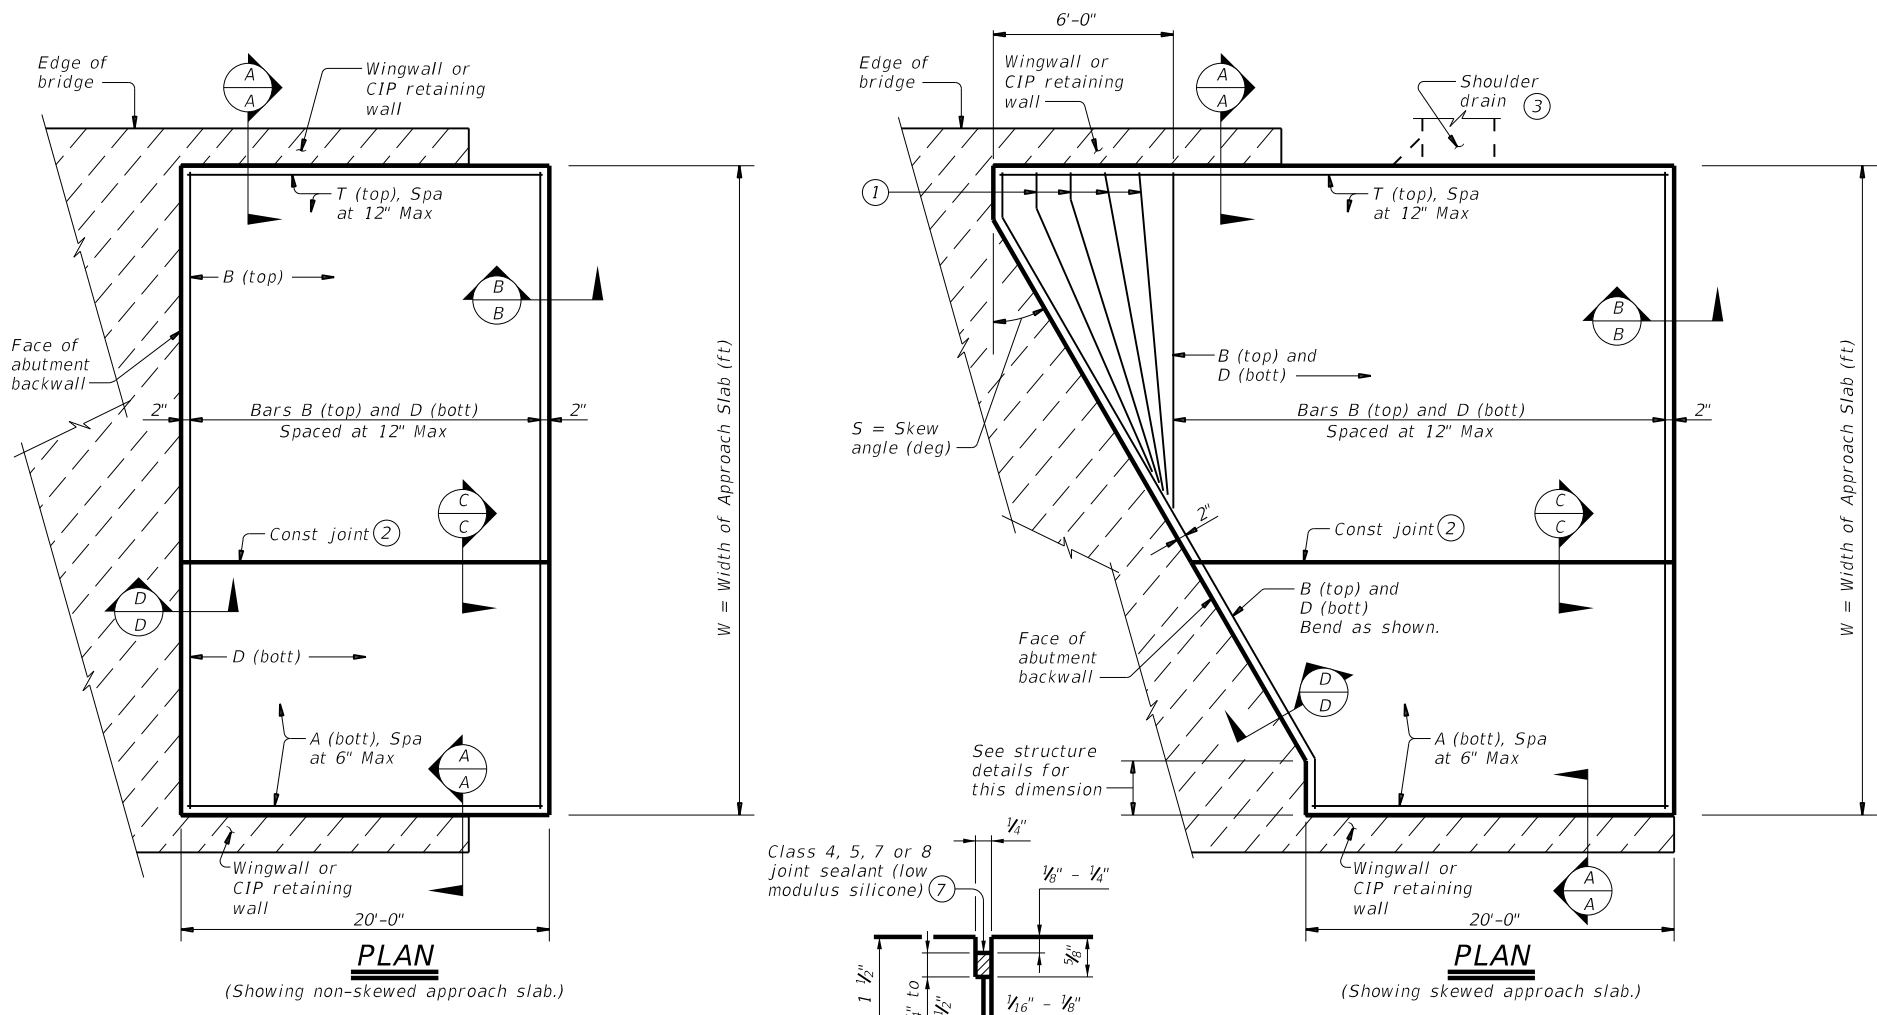


BAR TABLE	
BAR	SIZE
A	#8
B	#5
D	#5
T	#5


APPROXIMATE QUANTITIES ⁽⁴⁾	
Reinf steel weight = 8.5 Lbs/SF of Approach Slab	
Volume of Appr Slab Conc (CY) = 0.802W + 0.02W ² Tan S	
W = Width of Approach Slab (ft)	
S = Skew Angle (deg)	

- Flare Bars B and D in this region (1'-6" Max Spa, 3" Min Spa). Minimum flared bar length = 2'-6". Bend bars as necessary.
- Provide longitudinal construction joints that align with longitudinal construction joints in the bridge slab with bridges built in stages. Other longitudinal construction joints must receive approval of the Engineer.
- See details elsewhere in plans for shoulder drain location and details.
- For Contractor's information only. Quantities shown are for one approach slab.
- Multiple piece tie bars are acceptable at longitudinal construction joints provided minimum laps shown are achieved.
- See details elsewhere in plans for required cross-slope.
- Place in accordance with Item 438.
- Provide backer rod that is 25% larger than joint opening and compatible with the sealant.
- If bridge rail is present at the wingwall or CIP retaining wall, place 1/2" rebonded recycled tire rubber between concrete railing and top of approach slab as shown when concrete railing projects over the approach slab.

LONGITUDINAL SAW CUT JOINT DETAIL



GENERAL NOTES:
 Construct approach slab in accordance with Item 422.
 Provide Class "S" concrete with a minimum compressive strength of 4,000 psi.
 Provide Grade 60 reinforcing steel.
 Provide longitudinal joints as shown on the Longitudinal Saw Cut Joint Detail at lane lines and shoulders when width between longitudinal construction joints or edges of approach slab exceeds 16 feet. Saw cut joints within 24 hours of concrete placement to a depth of 1 1/2" and seal in accordance with Item 438. Alternately, provide a controlled joint consisting of 1 1/2" vinyl or plastic joint former (Stress Cap, Zip Strip, Stress Lock, or equal as approved by the Engineer.)
 Provide rebonded recycled tire rubber joint filler that meets the requirements of DMS-6310. "Joint Sealants and Fillers."
 Construct the subgrade or subbase away from the bridge for a minimum distance of 100 feet prior to the approach slab, unless otherwise indicated on the plans.
 Compact and finish the subgrade or foundation for the approach slab to the typical cross-section and to the lines and grades shown on the plans.
 Cure for 4 days using water or membrane curing per Item 422.
 All details shown herein are subsidiary to bridge approach slab.
 Cover dimensions are clear dimensions, unless noted otherwise.

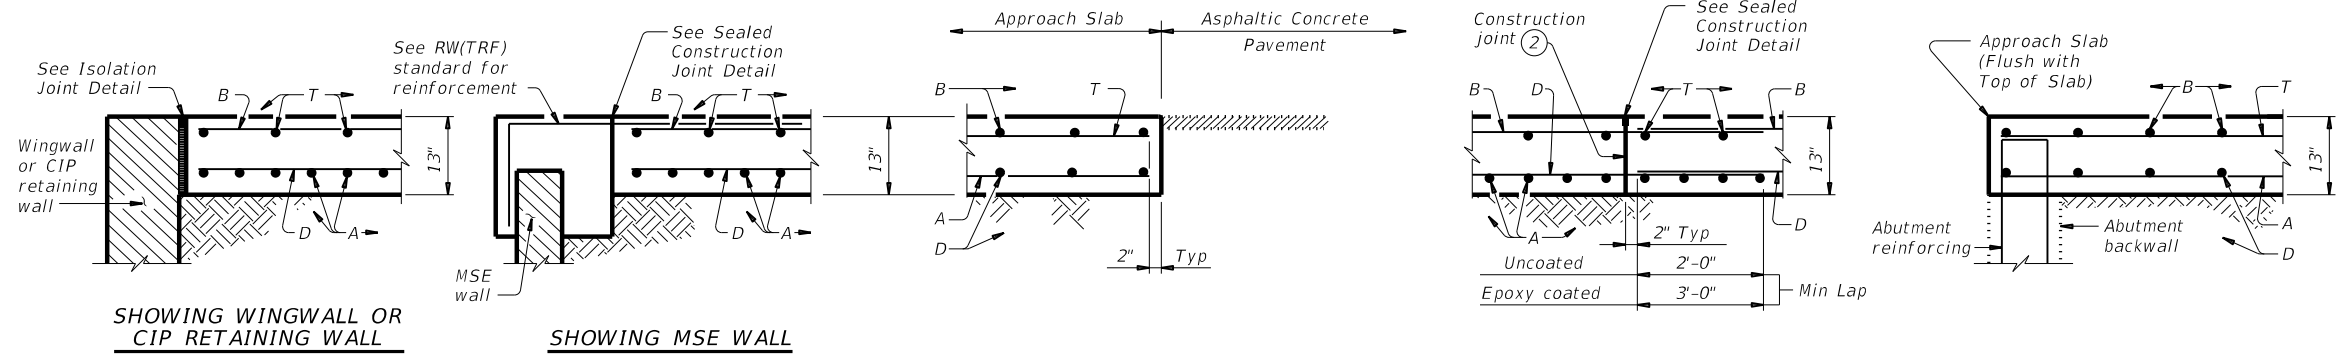


SECTION A-A


SECTION B-B

SECTION C-C ⁽⁵⁾


SECTION D-D

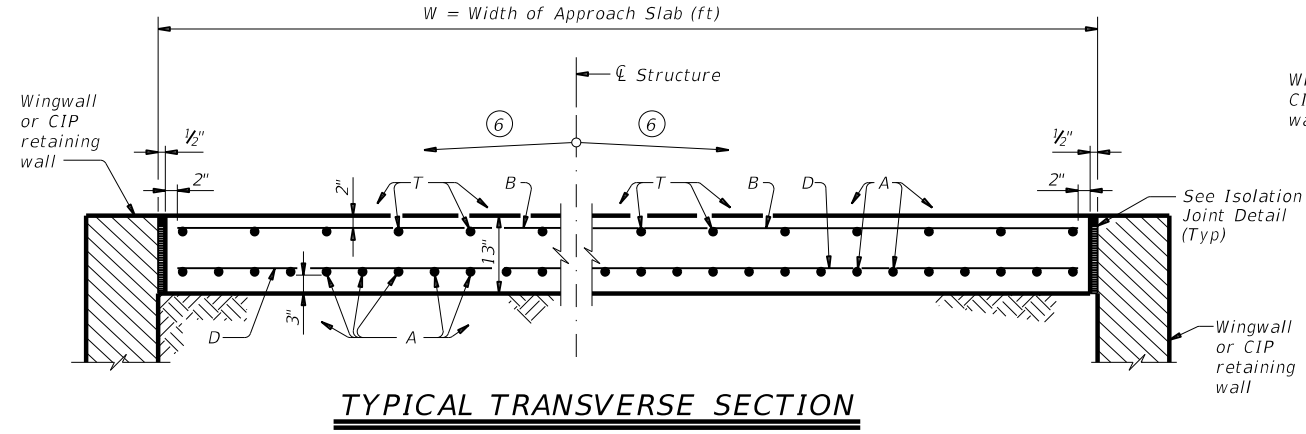

TYPICAL TRANSVERSE SECTION

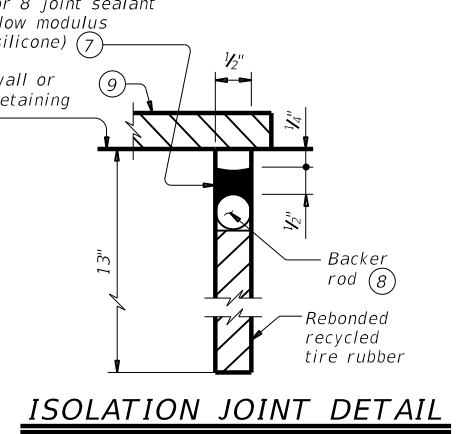

ISOLATION JOINT DETAIL

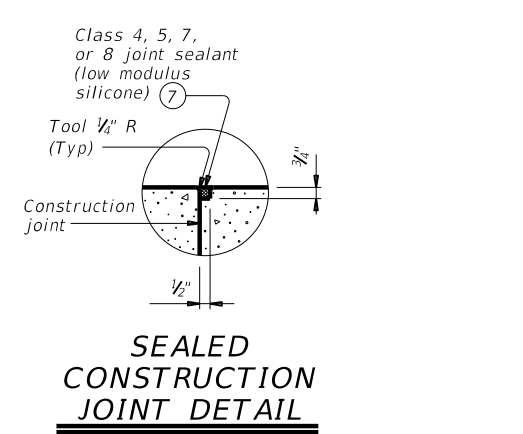

SEALED CONSTRUCTION JOINT DETAIL

Texas Department of Transportation		Bridge Division Standard	
BRIDGE APPROACH SLAB			
ASPHALTIC CONCRETE PAVEMENT			
BAS-A			
FILE: basaste1-20.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT
©TxDOT April 2019	CONTRACT	SECTION	HIGHWAY
REVISIONS	0568	01	059 SH 34
02-20: Removed stress relieving pad.	DIST	COUNTY	SHEET NO.
DAL	ELLIS		52

DATE: 4/12/2022 3:03:50 PM
 FILE: \\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\05000000\05000000.dwg
 PROJECT: 05000000
 DRAWING: 05000000.dwg
 TITLE: REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS
 AUTHOR: JACOB
 CHECKED: JACOB
 APPROVED: JACOB
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information provided herein.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS				DELINEATORS				D & OM DESCRIPTIVE CODES	
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	SINGLE		DOUBLE		INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX(XX) NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRF = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount DIRECTION If Required BI = Bi-Directional BR = Bi-Directional with red on back
SHEETING: Yellow, White or Red Type B or C reflective sheeting				SHEETING: Yellow, White or Red Type B or C Reflective Sheeting					
NOTE: 1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (fix). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.				POST TYPE: WC, YFLX, WFLX		POST TYPE: WC, YFLX, WFLX			
				MOUNT TYPE: GND		MOUNT TYPE: GND, SRF			

OBJECT MARKERS								
DEVICE	Type 1 (OM-1)	Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4
SHEETING: Yellow-Type B or C Sheeting		SHEETING: Yellow - Type B or C Sheeting			SHEETING: Alternating acrylic black and retroreflective yellow - Type B _{FL} or C _{FL} Sheeting			SHEETING: Red -Type B _{FL} or C _{FL} Sheeting
POST TYPE: TWT		POST TYPE: WC	POST TYPE: WC	POST TYPE: WFLX	POST TYPE: TWT			POST TYPE: TWT
MOUNT TYPE: WAS, WAP		MOUNT TYPE: GND	MOUNT TYPE: GND	MOUNT TYPE: GND, SRF	MOUNT TYPE: WAS, WAP			MOUNT TYPE: WAS, WAP

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE: Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.
DEVICE	GF1	GF2	CTB	W1-8				W1-6	
SHEETING: Yellow, White, Red			SHEETING: Yellow, White, Red				SHEETING: Yellow, White, Red		
NOTE: 1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			NOTE: 1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).						
SIZE (W x L): GF1 (18" x 24"), GF2 (24" x 30"), CTB (30" x 36")			SIZE (W x L): W1-8 (18" x 24" Conventional, 24" x 30" Conventional Oversize, 30" x 36" Expressway, 36" x 48" Freeway)				SIZE (W x L): W1-6 (48" x 24" Conventional, 60" x 30" Expressway & Freeway)		
MOUNTING HEIGHT: 4'-0" or 7'-0"			MOUNTING HEIGHT: 4'-0" or 7'-0"				MOUNTING HEIGHT: 7'-0"		

DEPARTMENTAL MATERIAL SPECIFICATIONS	
FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600

Texas Department of Transportation
 Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION

D & OM(1)-20

FILE: dom1-20.dgn	DN: TXDOT	CK: TXDOT	OW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	DAL	ELLIS	53	

20A

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information provided herein.

DATE: 4/12/2022 3:03:54 PM
 FILE: \\txdot.projectwiseonline.com\TXDOT5\Documents\18 - DAL\Design Projects\180101\180101.dwg

POST TYPE AND SUPPORT FOUNDATION DETAILS				TYPE OF BARRIER MOUNTS		
WING CHANNEL (WC)	FLEXIBLE POSTS (YFLX, WFLX)		WEDGE ANCHOR SYSTEMS		GUARD FENCE ATTACHMENT	
GND	GND	SRF	WAS	WAP	GF 1	GF 2
	EMBEDDED	SURFACE MOUNT	STEEL	PLASTIC	CONCRETE TRAFFIC BARRIER (CTB)	
NOTES 1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only. 2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.			NOTE 1. Install per manufacturer's recommendations.		GENERAL NOTES 1. Place delineators on a section of roadway at a consistent distance from the edge of pavement. 2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction. 3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible. 4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation. 5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface. 6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.	
NOTES 1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices. 2. Install per manufacturer's recommendations. 3. Post length may vary to meet field conditions. 4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.						
TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS		CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN		DELINEATORS AND TYPE 2 OBJECT MARKERS		
NOTE Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)		NOTE Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.		See general notes 1, 2 and 3.		

Texas Department of Transportation
Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER INSTALLATION

D & OM(2)-20


FILE: dom2-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	DAL	ELLIS	54	

DATE: 4/12/2022 3:03:58 PM
 FILE: \\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\05030000\05030000.dgn
 PROJECT: 05030000
 DRAWING: 05030000.dgn
 TITLE: DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING
 AUTHOR: J. W. BROWN
 CHECKED: J. W. BROWN
 APPROVED: J. W. BROWN
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information presented herein.

MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	• RPMs	• RPMs
15 MPH & 20 MPH	• RPMs and One Direction Large Arrow sign	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	• RPMs and Chevrons


SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

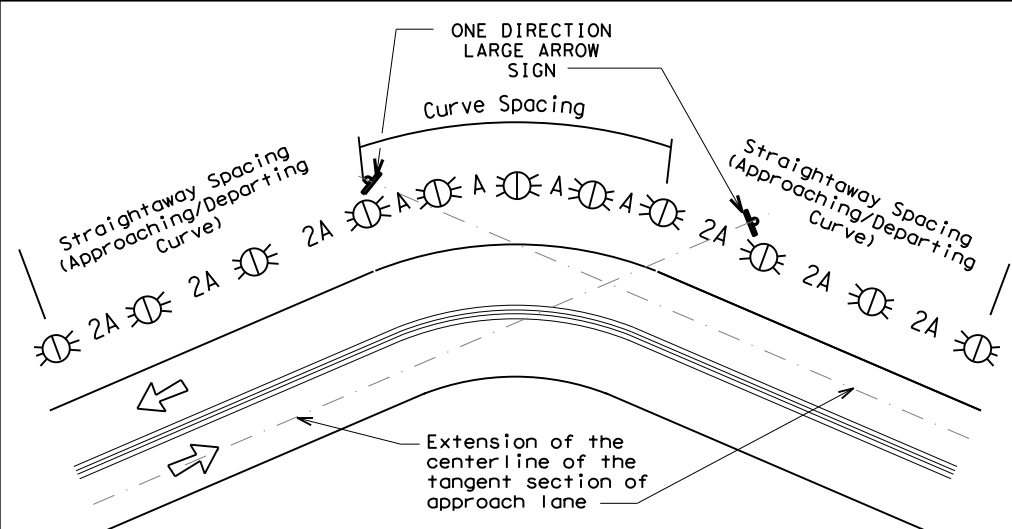

NOTE

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

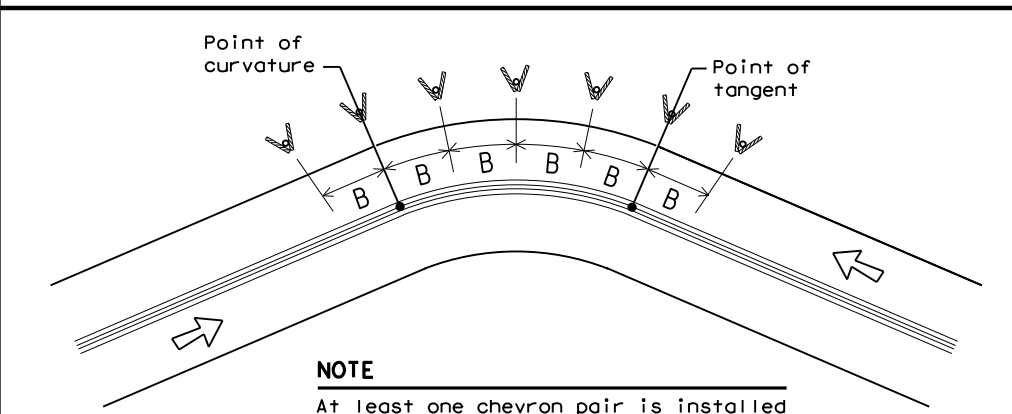

NOTE

At least one chevron pair is installed beyond the point of tangent in tangent section.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy/Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

NOTES

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign

Texas Department of Transportation
Traffic Safety Division Standard


DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(3)-20

FILE: dom3-20.dgn	DW: TXDOT	CK: TXDOT	OW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	DAL	ELLIS	55	


DATE: 4/12/2022 3:04:02 PM
 FILE: \\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\0520200909\0520200909.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard into a digital format.

CROSSOVERS

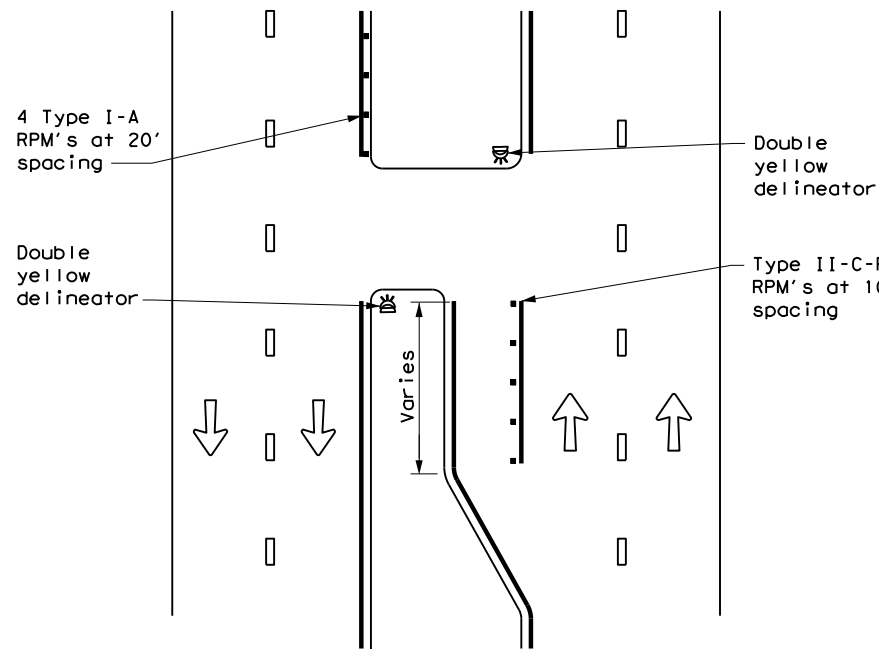


DETAIL 1

FOR CULVERTS WITHOUT MBGF

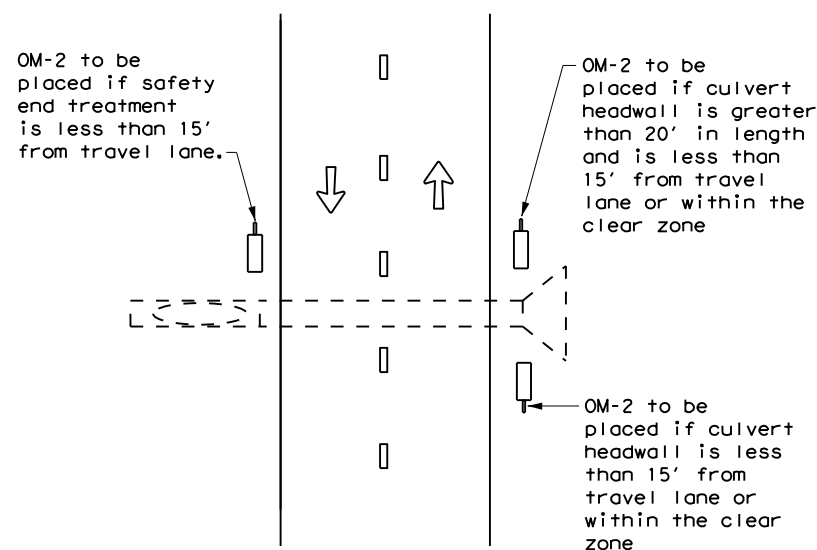


DETAIL 2

FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES

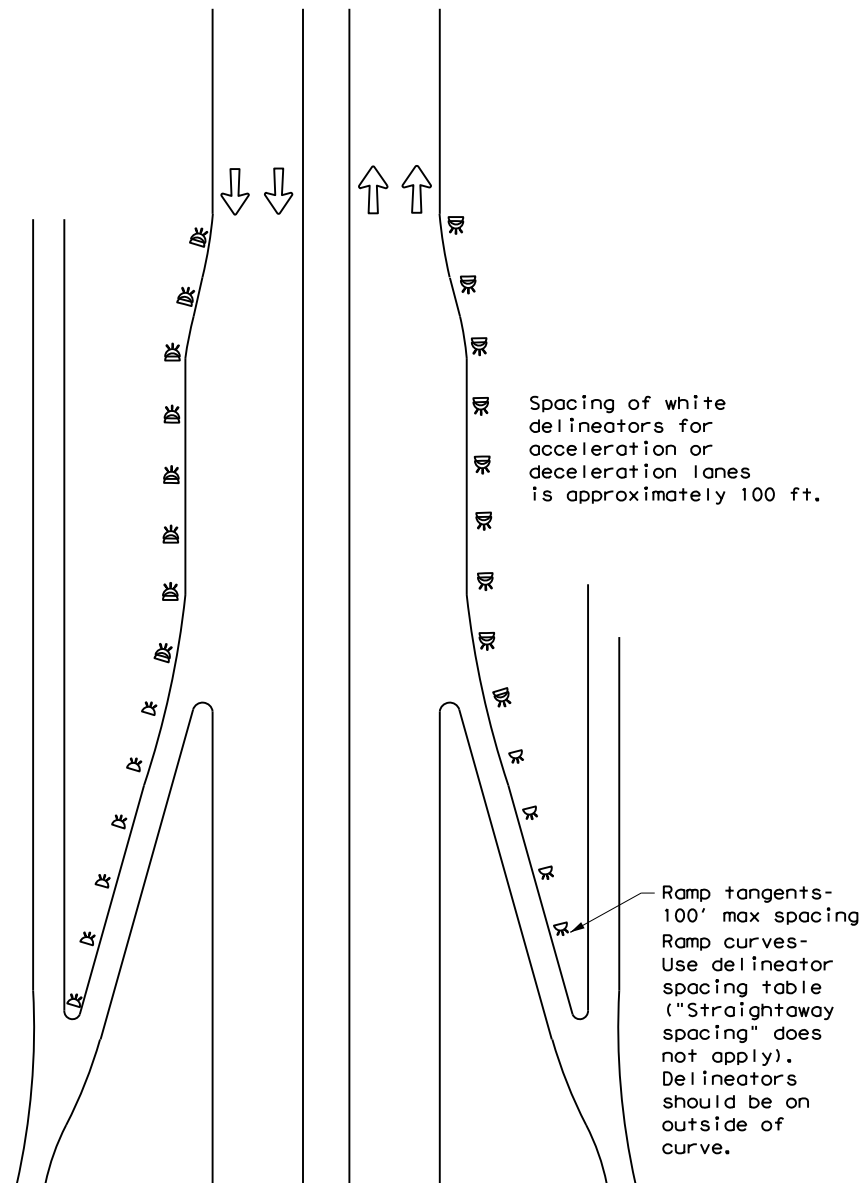


DETAIL 3

TYPICAL APPLICATION OF DEAD END BARRICADE

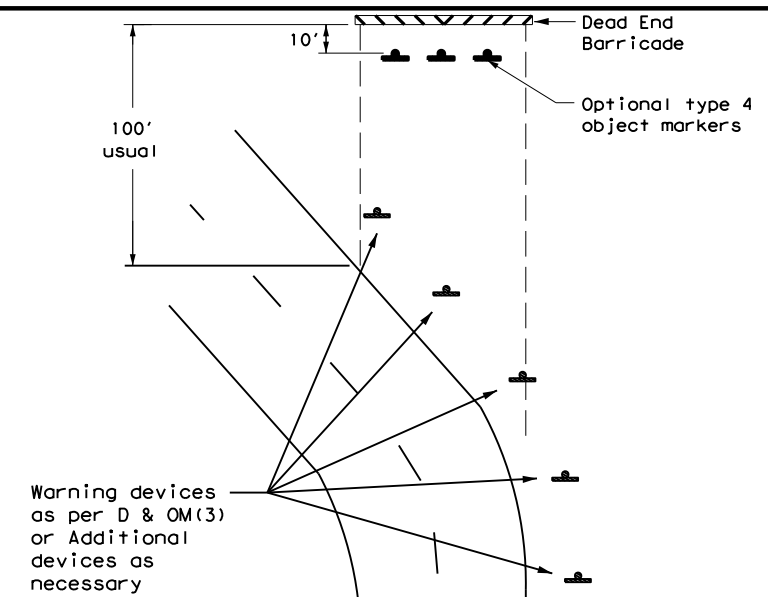

DETAIL 4

TYPICAL DEAD END BARRICADE INSTALLATION

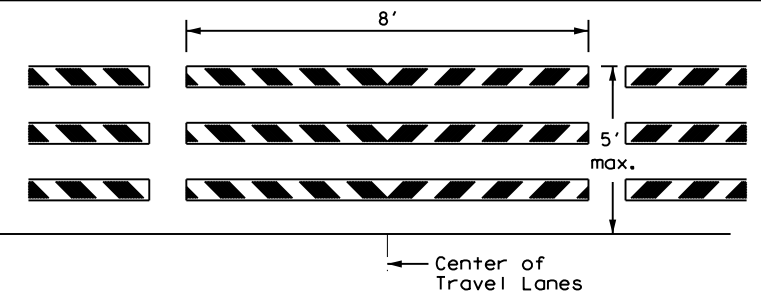

NOTES

- Barricade striping shall be red and white reflective sheeting for all permanent road closures.
- Barricade striping is red and white sloping toward the center of the roadway.
- Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

DETAIL 5

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator




DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(4) -20

FILE: dom4-20.dgn	DN: TXDOT	CK: TXDOT	OW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
3-15	DIST	COUNTY	SHEET NO.	
7-20	DAL	ELLIS	56	


**TWO-WAY, TWO LANE ROADWAY
WITH REDUCED WIDTH APPROACH RAIL**

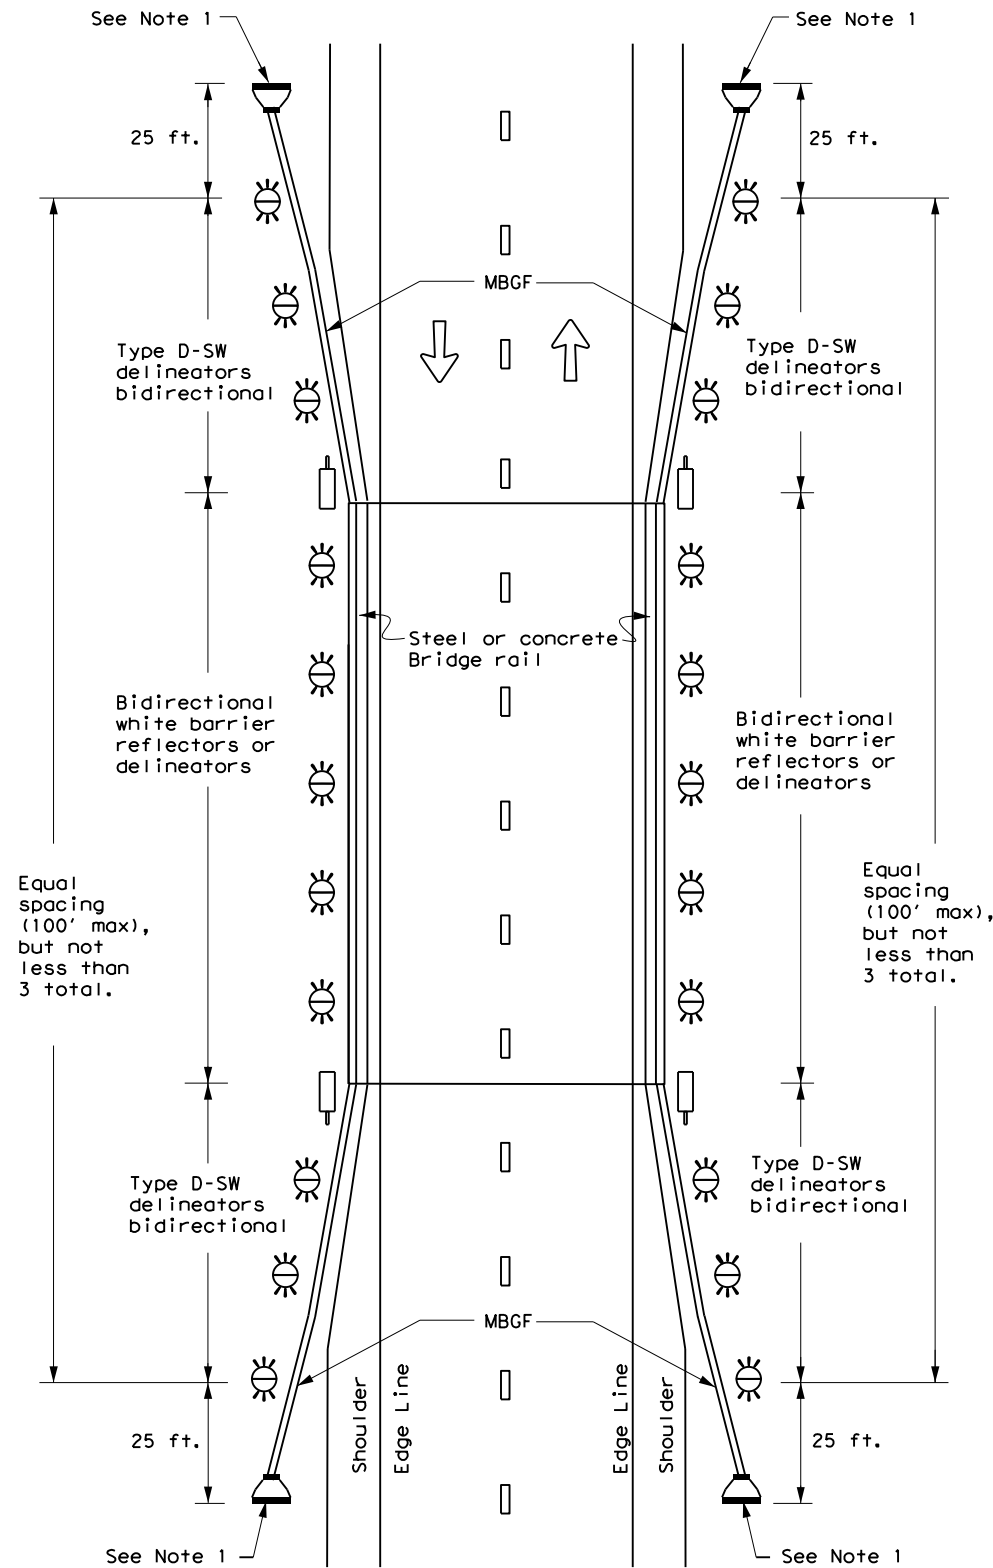

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.


**TWO-WAY, TWO LANE ROADWAY
WITH METAL BEAM GUARD FENCE (MBGF)**

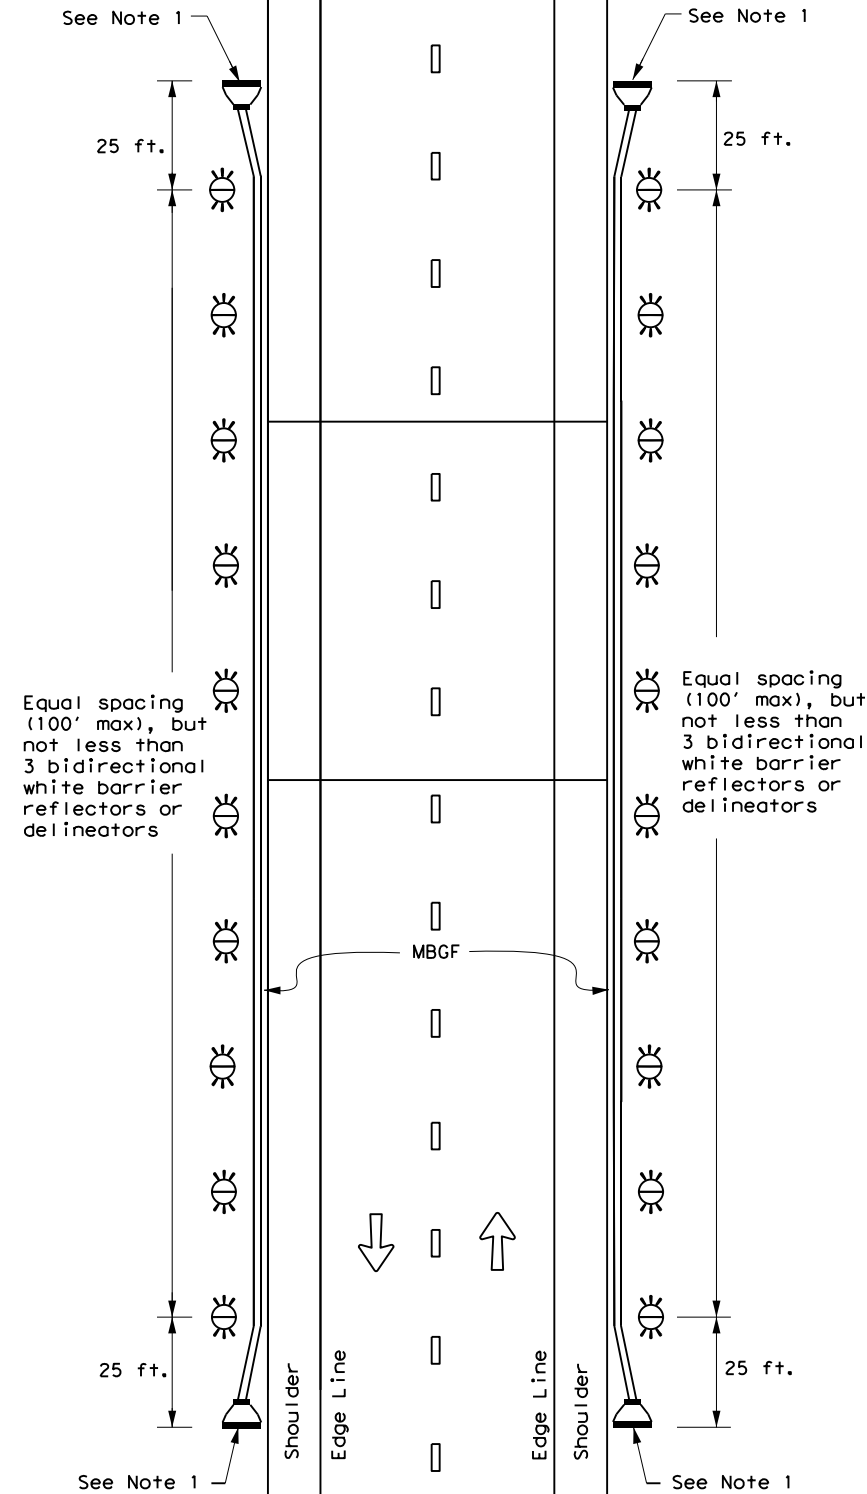

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**TWO-WAY, TWO LANE ROADWAY
BRIDGE WITH NO APPROACH RAIL**

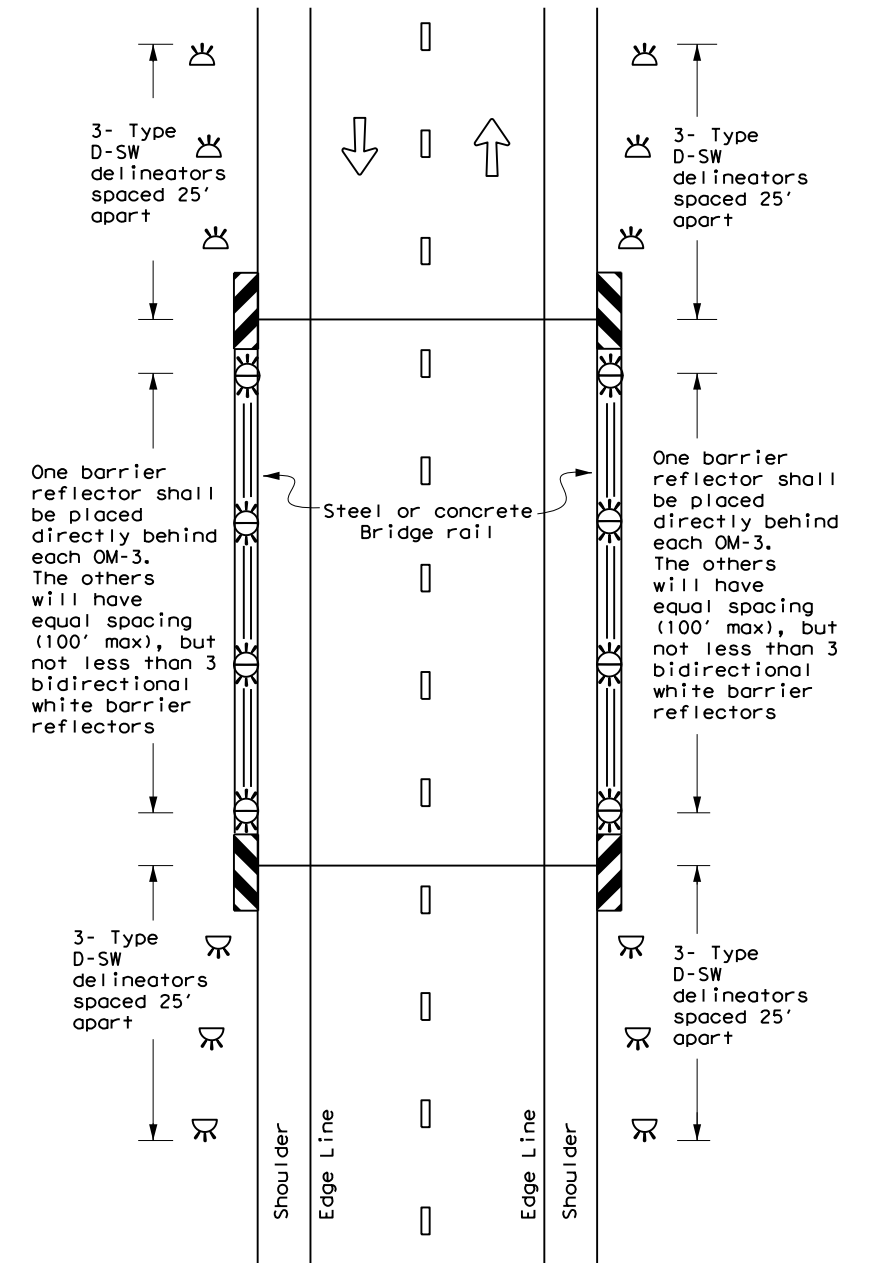

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow



**DELINEATOR &
OBJECT MARKER
PLACEMENT DETAILS**

D & OM(5)-20


FILE: dom5-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
7-20	DIST	COUNTY	SHEET NO.	
	DAL	ELLIS	57	

DATE: 4/12/2022 3:04:06 PM
 FILE: \\txdot\project\wiseonline.com\TXDOT5\Documents\18 - DAL\Design Projects\05680101\05680101.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information presented herein. For more information, please contact the Texas Department of Transportation, 12000 North Loop West, P.O. Box 21089, Houston, Texas 77218-0899.

DATE: 4/12/2022 3:04:12 PM
 FILE: \\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\05202020\05202020.dwg


CONTINUOUS CONCRETE OR STEEL BARRIER

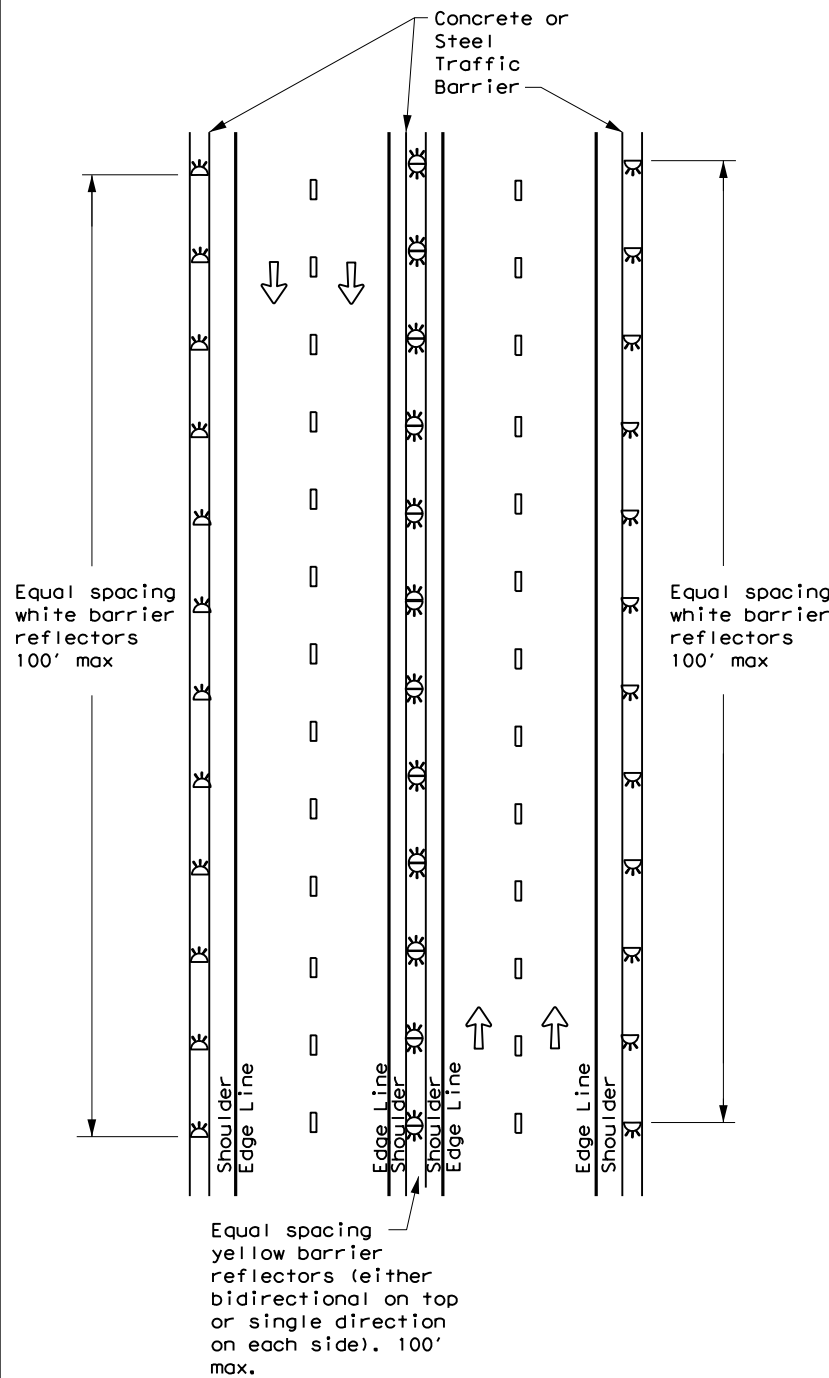


MULTI-LANE UNDIVIDED, TWO-WAY ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

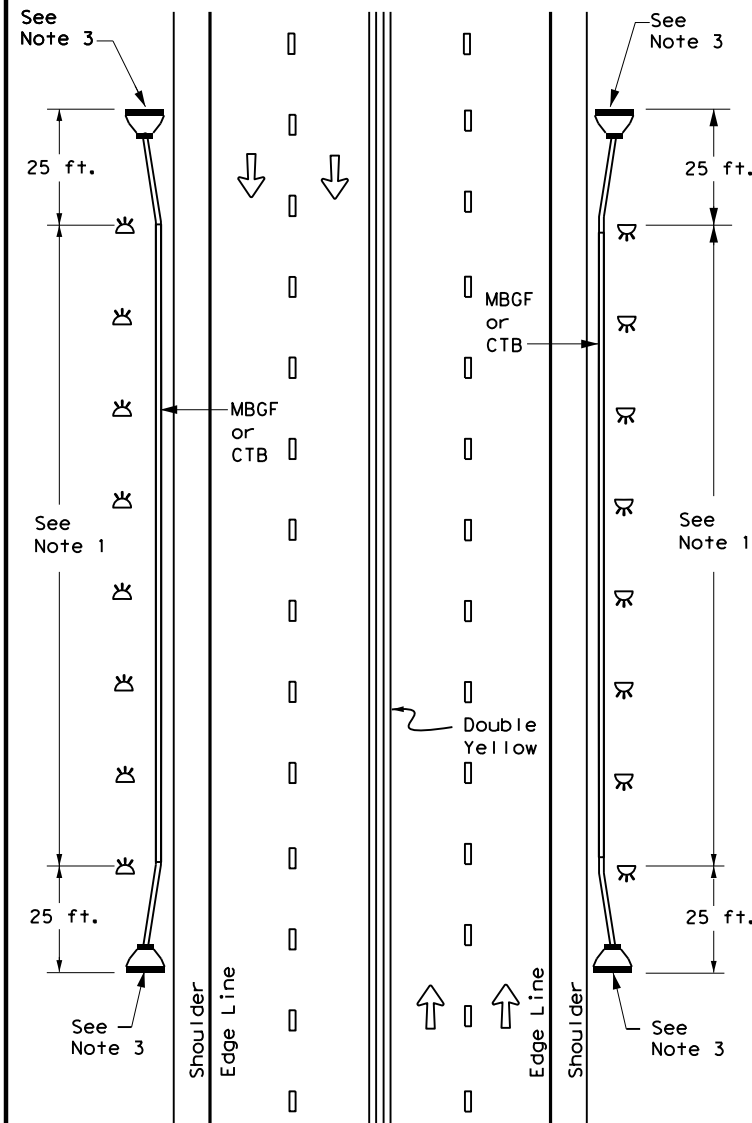

DIVIDED ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

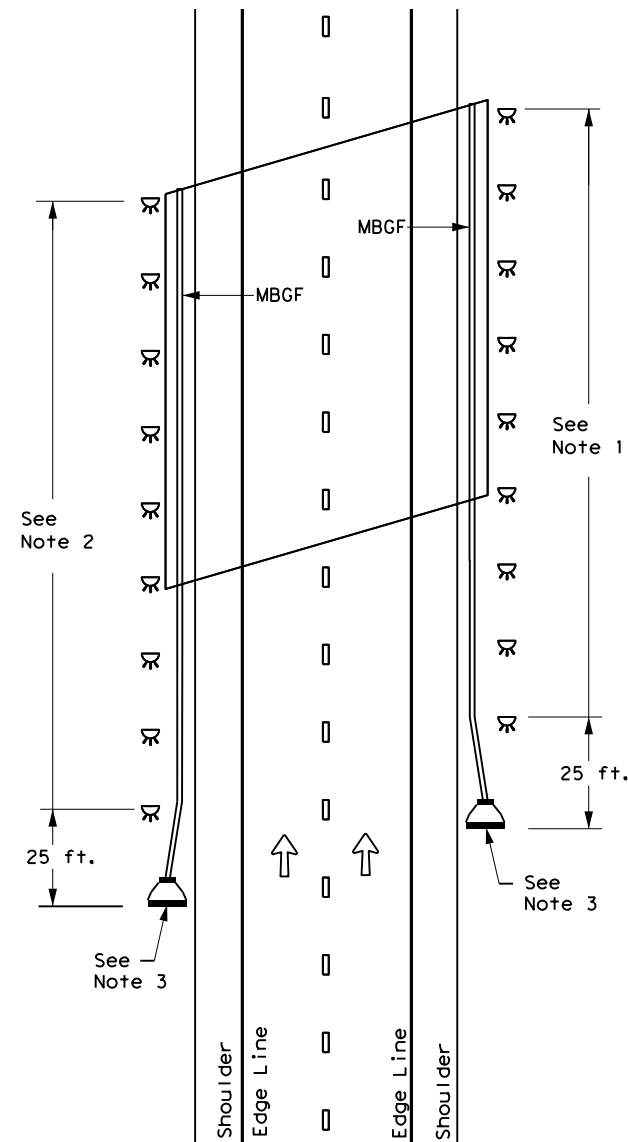

EMERGENCY CROSSOVER

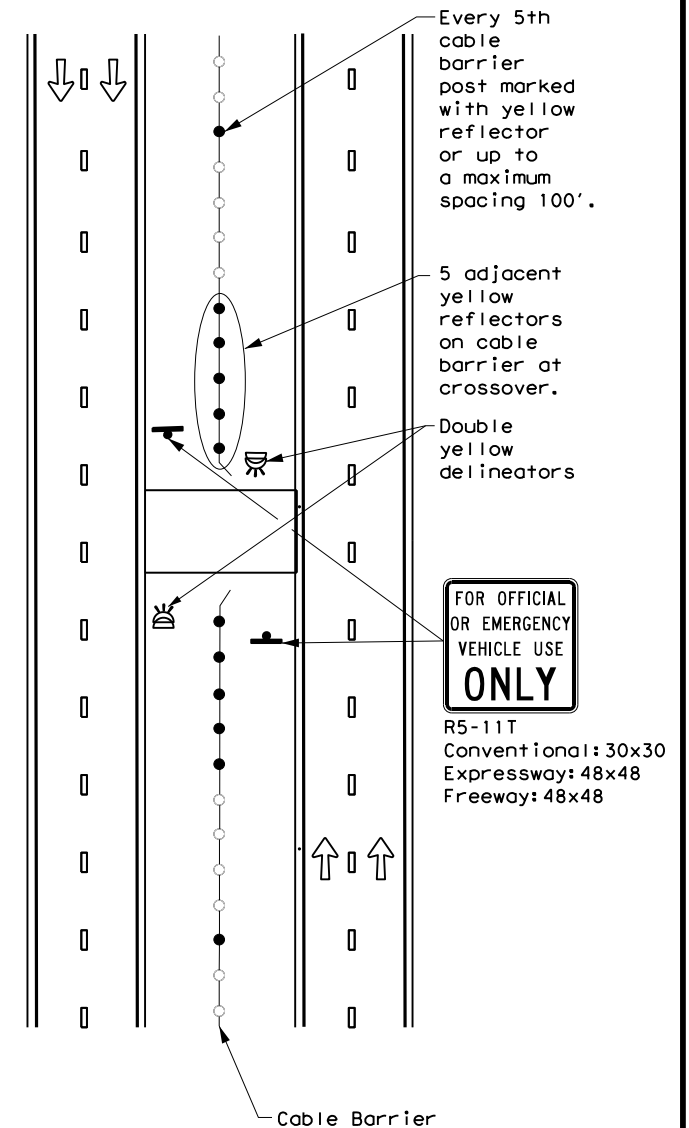

NOTES

1. Equal spacing (100' max), but not less than 3 single directional white barrier reflectors or delineators. On Continuous Barrier, equal spacing (100' max.)
2. Equal spacing (100' max), but not less than 3 single directional yellow barrier reflectors or delineators.
3. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow







DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(6)-20



FILE: dom6-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0568	01	059	SH 34
7-20	DIST	COUNTY	SHEET NO.	
	DAL	ELLIS	58	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided herein. For more information, contact the Texas Department of Transportation, Design Engineering Division, 4901 Westheimer Road, Austin, Texas 78756-8399. Telephone: (512) 463-2000. Fax: (512) 463-2001. E-mail: design@txdot.gov.

DATE: 4/12/2022 3:04:16 PM
 FILE: \\txdot\project\wiseon\line.com\TXDOT\5\Documents\18 - DAL\Design Projects\180919\180919.dwg

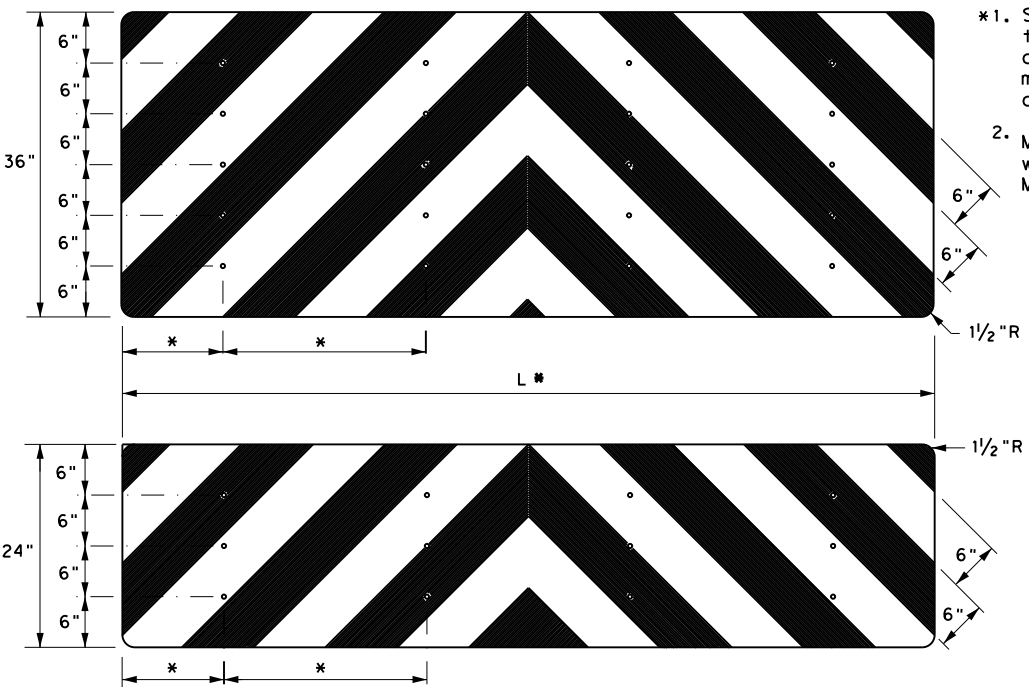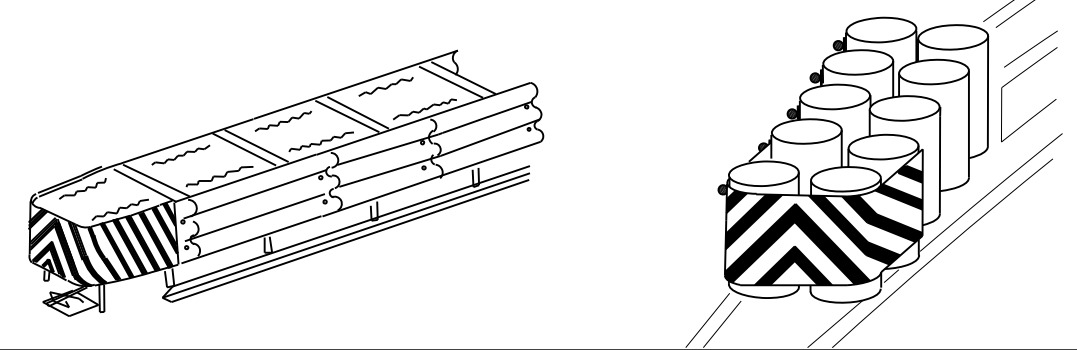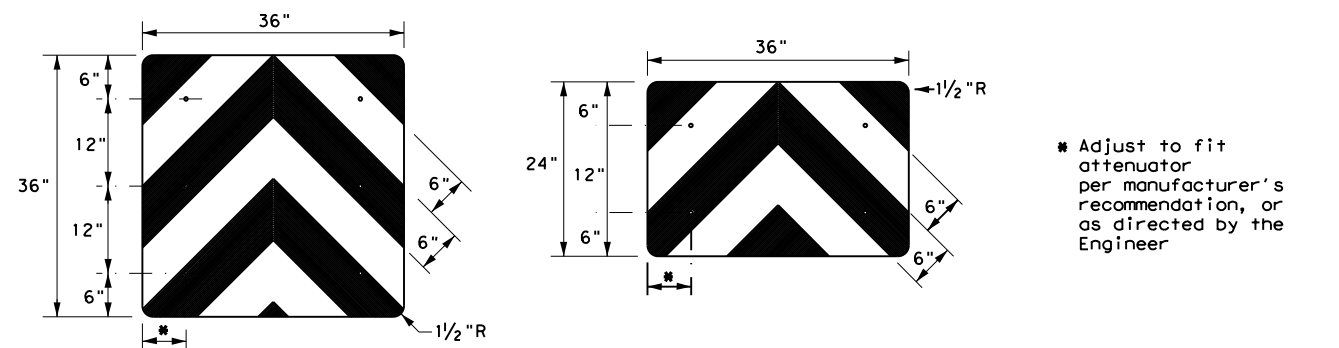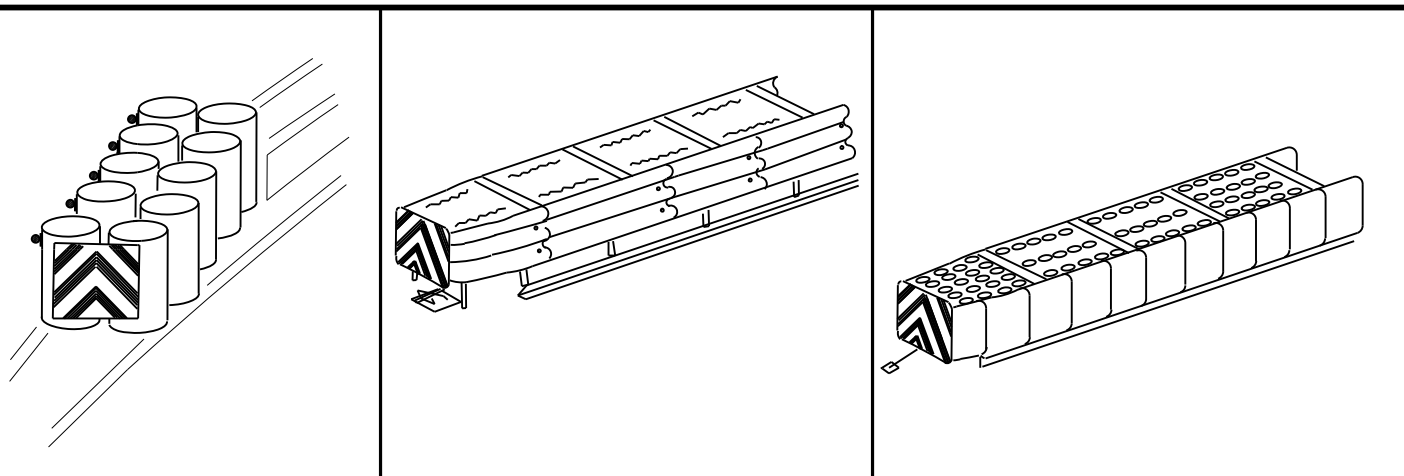



- NOTES**
- *1. Spacing should be adjusted to attach through centerline of drum, per attenuator manufacturer's recommendation, or as directed by the Engineer.
 - 2. Mounting should be flush with top of attenuator. Minimum size 96" x 24".

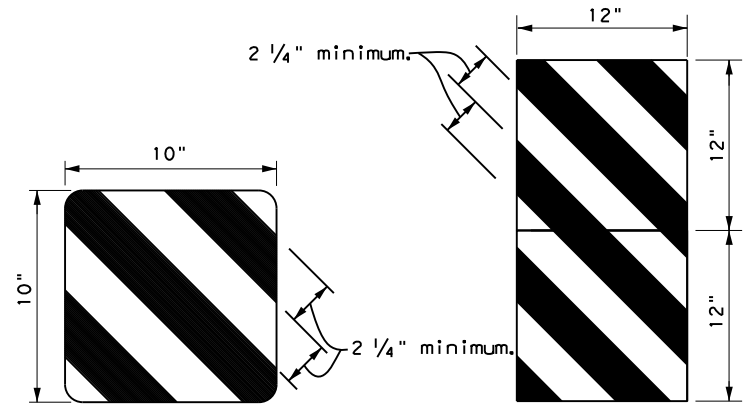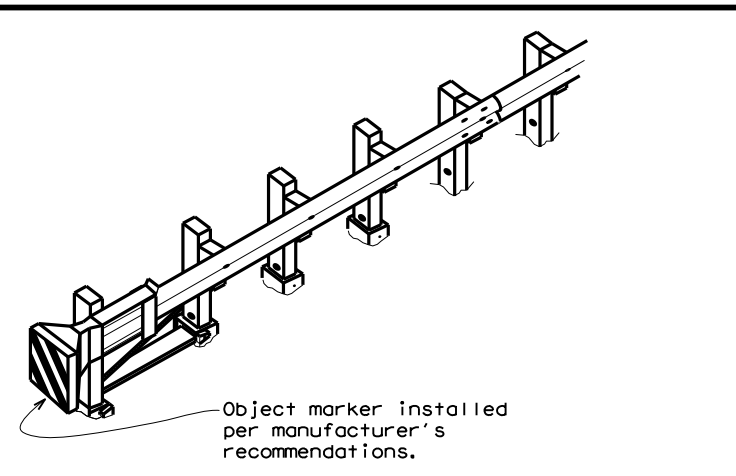

OBJECT MARKERS SMALLER THAN 3 FT²


NOTES

1. Object Markers shall conform to the Texas MUTCD and meet the color and reflectivity requirement of Department Material Specification DMS 8300. Background shall be yellow reflective sheeting (Type B or C) and Chevron shall be black.
2. Object Markers may be fabricated from adhesive backed reflective sheeting applied directly to guardrail end treatment, or applied directly to an "end cap" as per the manufacturer's recommendation. Direct applied sheeting shall provide a smooth surface and have no wrinkles, air bubbles, cuts or tears. A radius at the corners is not required for direct applied sheeting.
3. Object Marker size may be reduced to fit smaller devices. Width of alternating black and yellow stripes are typically 6". Object Markers smaller than 3ft may have reduced width stripes of a minimum of 2 1/4".
4. Pop rivets, screws, or nuts and bolts may be used to attach object markers and reflectors. Holes, slots or other openings may be cut or drilled through object markers to allow cable or other attachments.
5. Object Marker at nose of attenuator is subsidiary to the attenuator.
6. See D & OM (1-4) for required barrier reflectors.

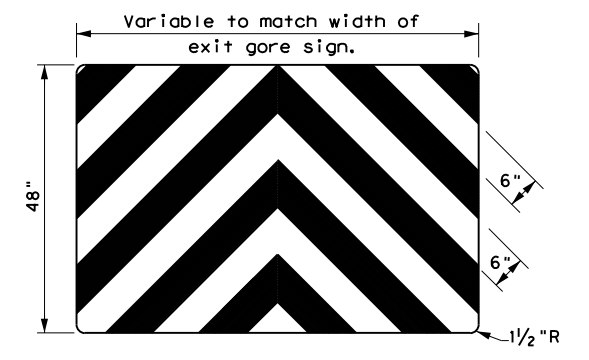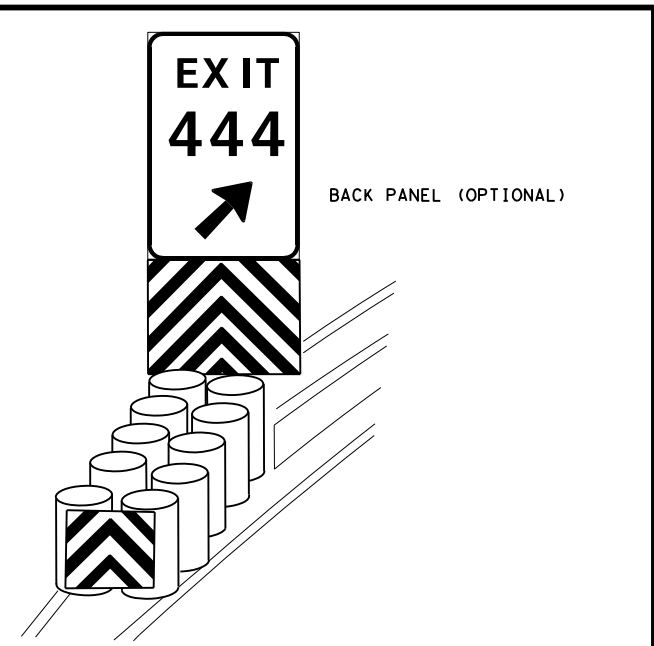


				Traffic Safety Division Standard	
DELINEATOR & OBJECT MARKER FOR VEHICLE IMPACT ATTENUATORS D & OM(VIA) -20					
FILE: domvia20.dgn	DN: TXDOT	CK: TXDOT	OW: TXDOT	CK: TXDOT	
© TXDOT December 1989	CONT	SECT	JOB	HIGHWAY	
REVISIONS			0568 01	059	SH 34
4-92 8-04	DIST	COUNTY	SHEET NO.		
8-95 3-15	DAL	ELLIS	59		
4-98 7-20					
20G					

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information resulting from its use.

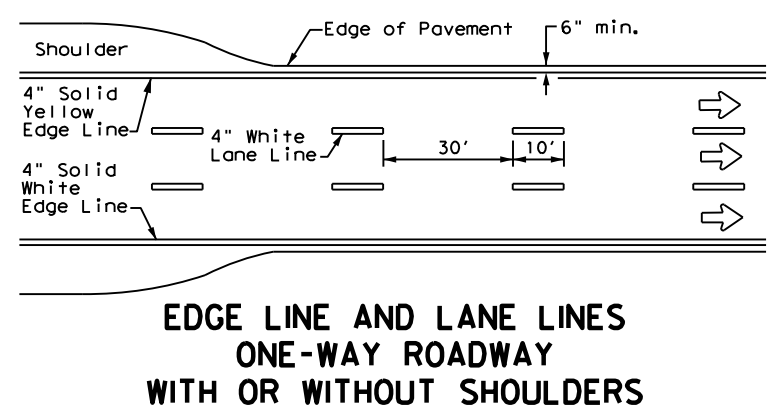

**EDGE LINE AND LANE LINES
ONE-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

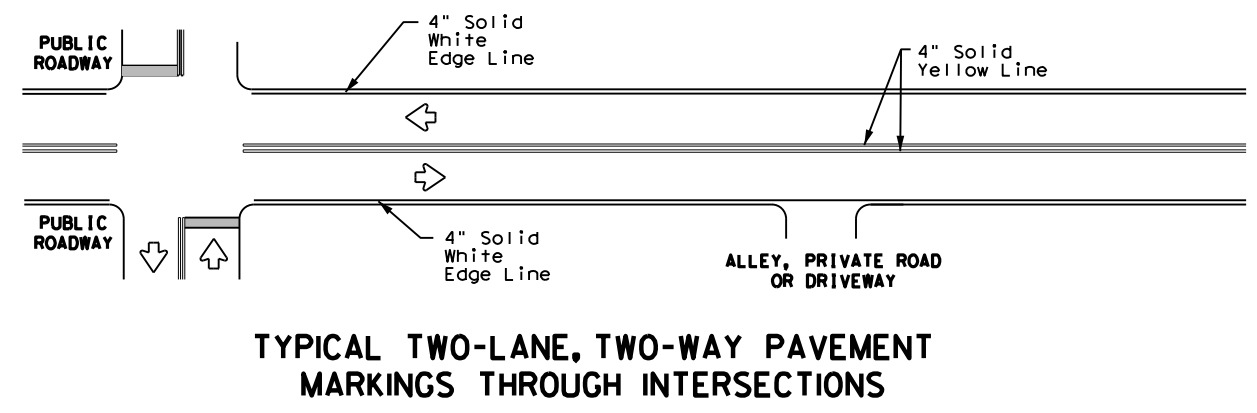


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**


- GENERAL NOTES**
1. Edgeline striping shall be as shown in the plans or as directed by the Engineer. The edgeline should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edgelines are not required in curb and gutter sections of roadways.
 2. The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the inside of edgeline to the inside of edgeline of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

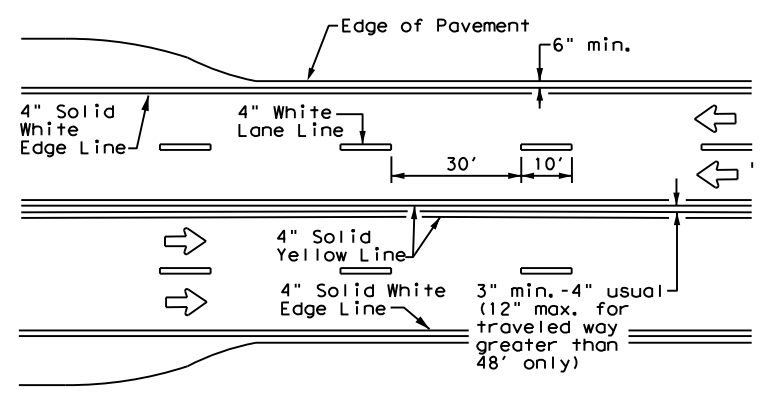


**CENTERLINE AND LANE LINES
FOUR LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

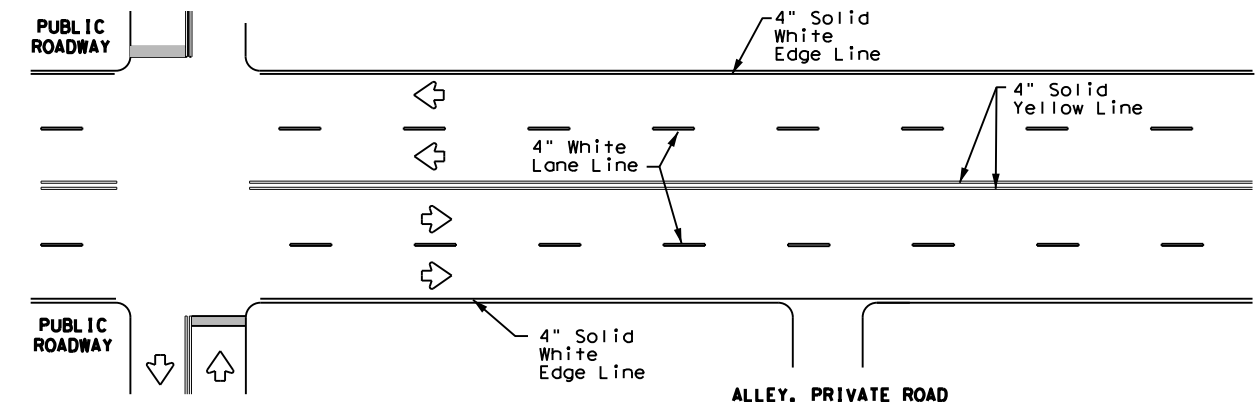


**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

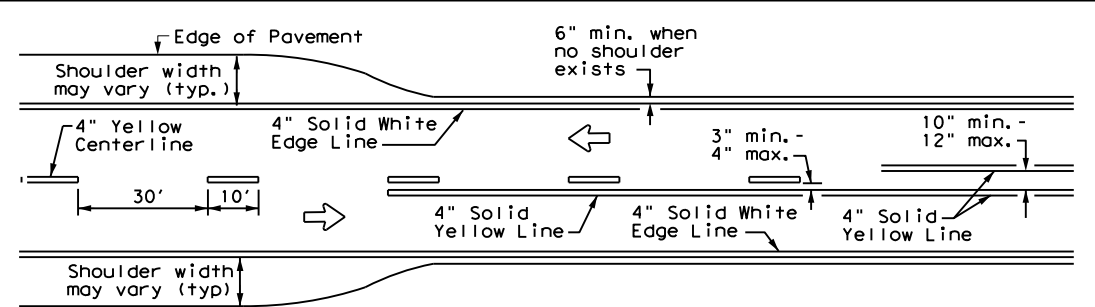

**TWO LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**




For posted speed on road being marked equal to or less than 40 MPH.




For posted speed on road being marked equal to or greater than 45 MPH.

YIELD LINES

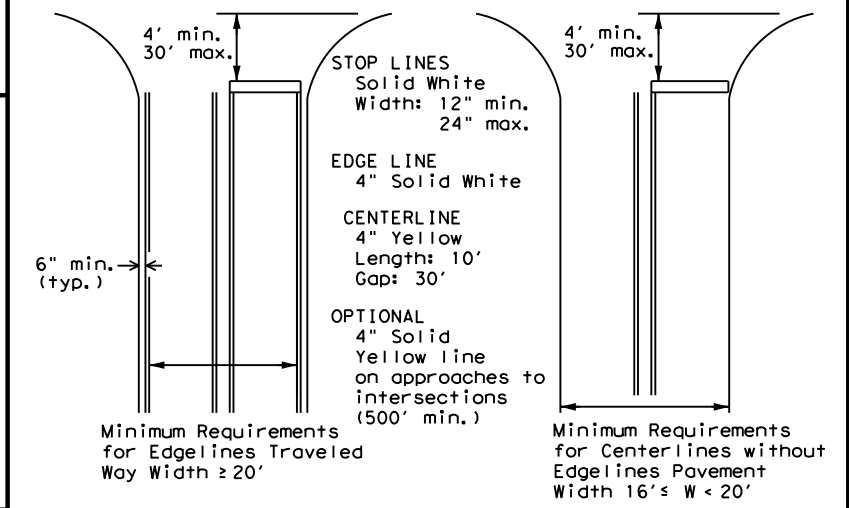

**GUIDE FOR PLACEMENT OF STOP LINES,
EDGE LINE & CENTERLINE**
Based on Traveled Way and Pavement Widths
for Undivided Highways

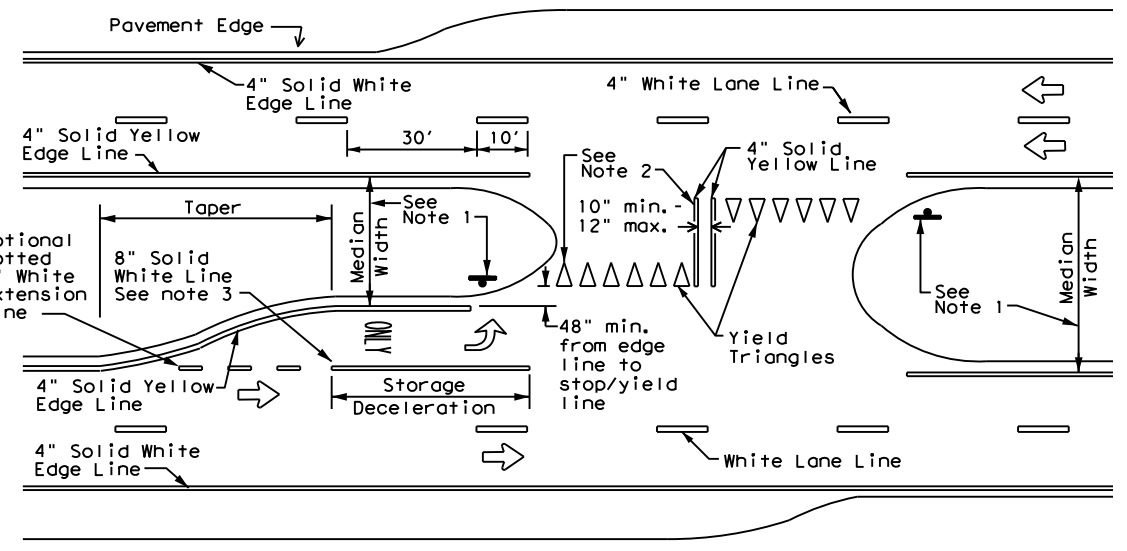

FOUR LANE DIVIDED ROADWAY CROSSOVERS

- NOTES**
1. Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs are optional as determined by the Engineer.
 2. Install median striping (double yellow centerlines and stop bars/yield triangles) when a 50' or greater median centerline can be placed. Stop bars shall only be used with stop signs. Yield triangles shall only be used with yield signs.
 3. Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.


**TYPICAL STANDARD
PAVEMENT MARKINGS**

PM(1) - 20


FILE: pm1-20.dgn	DW: CK:	DW: CK:	CK:
© TxDOT November 1978	CONT SECT	JOB	HIGHWAY
8-95 3-03 REVISIONS	0568 01	059	SH 34
5-00 2-12	DIST	COUNTY	SHEET NO.
8-00 6-20	DAL	ELLIS	60

REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information presented herein.

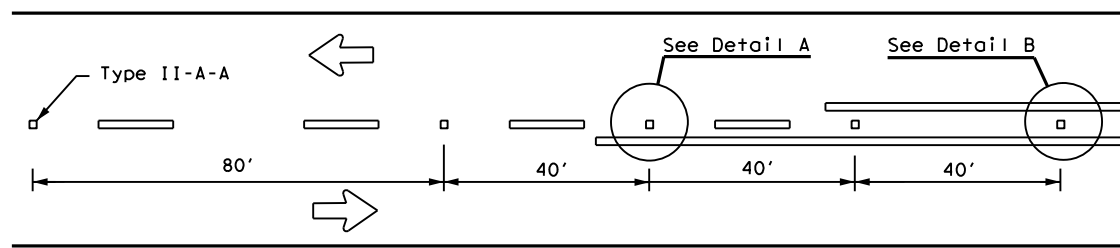


CENTERLINE FOR ALL TWO LANE ROADWAYS

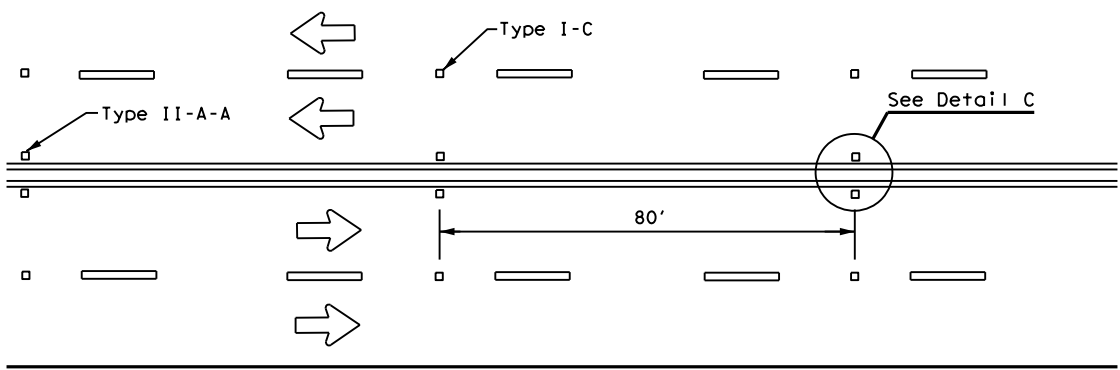

**CENTERLINE & LANE LINES
FOR FOUR LANE TWO-WAY HIGHWAYS**

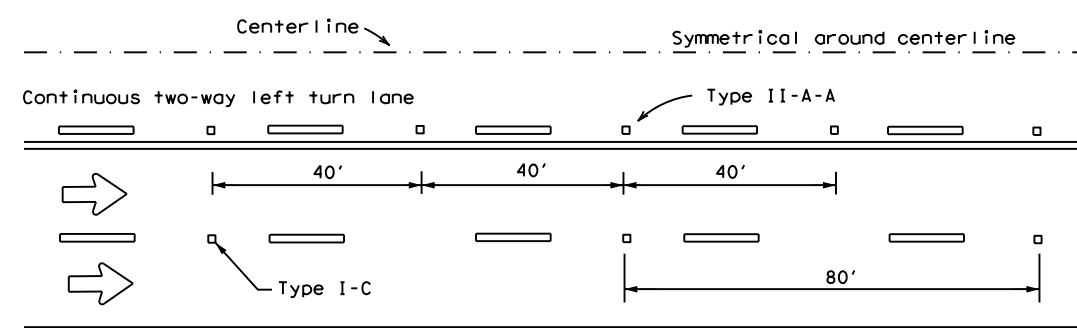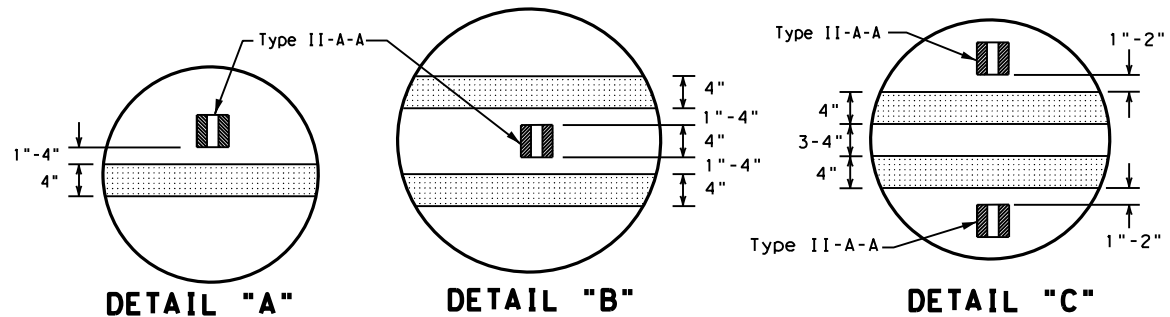

CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

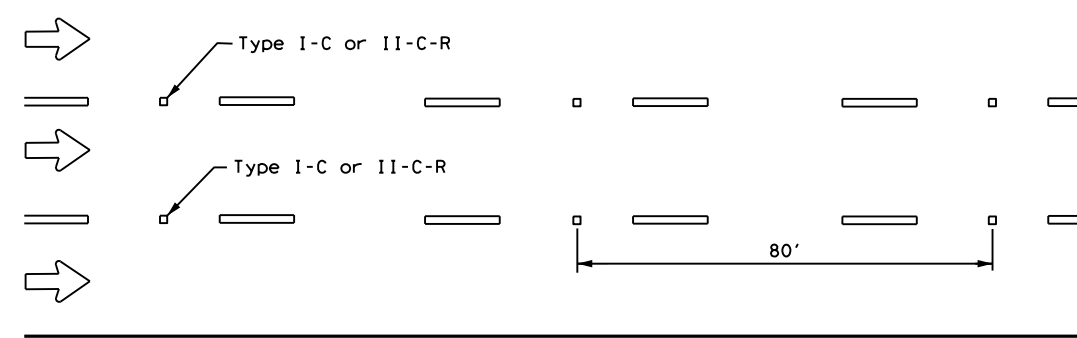


LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)


Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

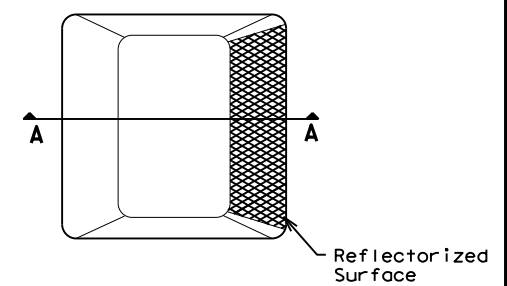

Type I (Top View)

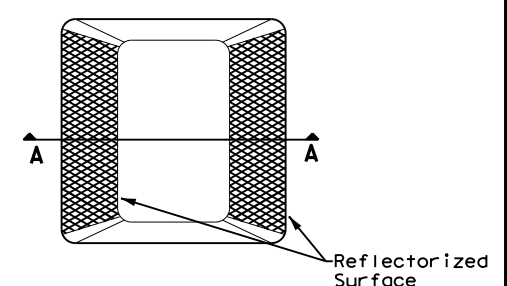


Type II (Top View)

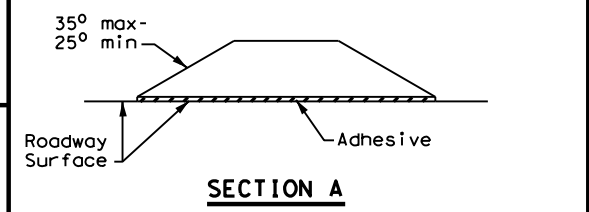


RAISED PAVEMENT MARKERS

GENERAL NOTES

- All raised pavement markers placed in broken lines shall be placed in line with and midway between the stripes.
- On concrete pavements the raised pavement markers should be placed to one side of the longitudinal joints.

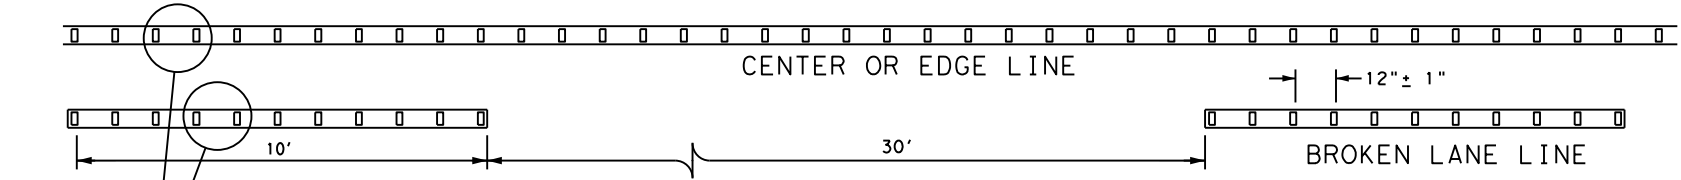

**REFLECTORIZED PROFILE
PATTERN DETAIL**
USING REFLECTIVE PROFILE PAVEMENT MARKINGS

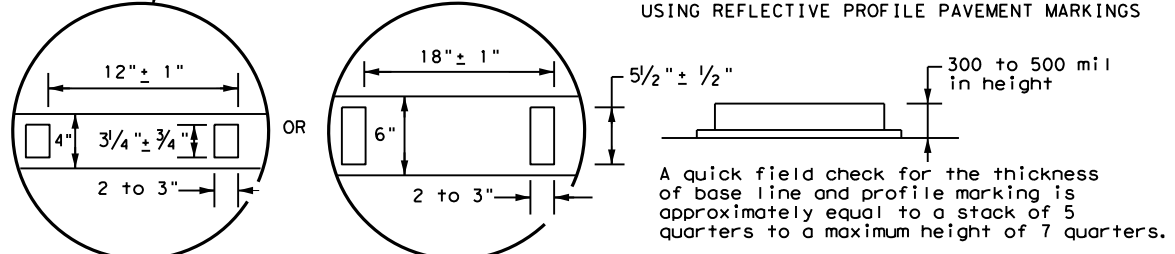

NOTE
Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.



POSITION GUIDANCE USING RAISED MARKERS REFLECTORIZED PROFILE MARKINGS PM(2) - 20

FILE: pm2-20.dgn	DN:	CK:	DW:	CK:
© TxDOT April 1977	CONT	SECT	JOB	HIGHWAY
4-92 2-10 REVISIONS	0568	01	059	SH 34
5-00 2-12	DIST	COUNTY	SHEET NO.	
8-00 6-20	DAL	ELLIS	61	

A. GENERAL SITE DATA

1. PROJECT LIMITS: SH 34 AT BARDWELL RESERVOIR

Begin Project Coordinates : Latitude (N) : 32.2883000 Longitude (W) : -96.6551038
 End Project Coordinates : Latitude (N) : 32.2785524 Longitude (W) : -96.6670768

2. PROJECT SITE MAPS:

- * Project Location Map: The Title Sheet
- * Drainage Patterns:
- * Slopes Anticipated After Major Gradings or Areas of Soil Disturbance:
- * Location of Erosion and Sediment Controls:
- * Surface Waters and Discharge Locations:
- * Project Specific Location(s) (PSL): To be determined by the project Construction Personnel. Location(s) shown on SW3P Site Map (if PSL location(s) is within one mile of project) and information located in project SW3P Binder (Reference Item *IO below).

3. PROJECT DESCRIPTION:

Bridge Maintenance

4. MAJOR SOIL DISTURBING ACTIVITIES:

None

5. EXISTING CONDITION OF SOIL & VEGETATIVE COVER AND % OF EXISTING VEGETATIVE COVER:

Existing soil consists of primarily clay and fine sandy loam with some clay loam. Vegetative cover consists of grasses and weeds with scattered growths of trees. Existing grasses are in good condition with approximately 98% density (thick soil cover).

6. TOTAL PROJECT AREA: 0 Acres

7. TOTAL AREA TO BE DISTURBED: 0 Acres (0 %)

Bardwell Reservoir

8. WEIGHTED RUNOFF COEFFICIENT

BEFORE CONSTRUCTION: 0
 AFTER CONSTRUCTION: 0

9. NAME OF RECEIVING WATERS:

Bardwell Reservoir (Segment 0815; Impaired by Sulfate In water)

10. PROJECT SW3P Binder:

A. For projects disturbing one to five acres, TxDOT will maintain a SW3P Binder at the project field office (if there is not a project field office, should be kept at the Area Office) which contains the following: Index Sheet, TCEQ Signature Authority, TxDOT's and Contractor's Small Construction Site Notice, SW3P Inspector Qualification Statements, EPIC Sheet, SW3P Sheet, Site Location Maps, Inspection and Maintenance Reports (Form 2118), Construction Stage Gate Checklists (CSGC), Stored Material Lists specifying associated control measures and the Appendix which contains the TPDES Construction General Permit, TxDOT and Contractor MS4 Operator Notification(s) and the Construction PSL Permits per all applicable requirements.

B. For projects disturbing 5 acres or more, TxDOT will follow the actions listed in (10.A.) above with the addition of the following: TxDOT and Contractor Notice Of Intent (N.O.I.) and Fee Payment Form, TxDOT and Contractor Large Construction Site Notice (to be used instead of Small Site Notice), and TPDES Permit Coverage Notice.

C. For projects disturbing less than one acre, actions described in (10.A.) and (10.B.) above are not required. Acreage is calculated by adding Total Area To Be Disturbed Acres on project (See *7 above) and the PSL(s) acreage located within one mile of project.

B. EROSION AND SEDIMENT CONTROLS

1. SOIL STABILIZATION PRACTICES: (Select T = Temporary or P = Permanent, as applicable)

- | | |
|--|---|
| <input type="checkbox"/> TEMPORARY SEEDING | <input checked="" type="checkbox"/> P PRESERVATION OF NATURAL RESOURCES |
| <input type="checkbox"/> MULCHING (Hay or Straw) | <input type="checkbox"/> FLEXIBLE CHANNEL LINER |
| <input type="checkbox"/> BUFFER ZONES | <input type="checkbox"/> RIGID CHANNEL LINER |
| <input type="checkbox"/> PLANTING | <input type="checkbox"/> SOIL RETENTION BLANKET |
| <input type="checkbox"/> SEEDING | <input type="checkbox"/> COMPOST MANUFACTURED TOPSOIL |
| <input type="checkbox"/> SODDING | <input type="checkbox"/> VERTICAL TRACKING |
| | <input type="checkbox"/> OTHER: |

2. STRUCTURAL PRACTICES: (Select T = Temporary or P = Permanent, as applicable)

- SILT FENCES
- I EROSION CONTROL LOGS
- EROSION CONTROL COMPOST BERMS (Low Velocity)
- ROCK FILTER DAMS
- DIVERSION, INTERCEPTOR, OR PERIMETER DIKES
- DIVERSION, INTERCEPTOR, OR PERIMETER SWALES
- DIVERSION DIKE AND SWALE COMBINATIONS
- PIPE SLOPE DRAINS
- PAVED FLUMES
- I ROCK BEDDING AT CONSTRUCTION EXIT
- TIMBER MATTING AT CONSTRUCTION EXIT
- CHANNEL LINERS
- SEDIMENT TRAPS
- SEDIMENT BASINS
- STORM INLET SEDIMENT TRAP
- STONE OUTLET STRUCTURES
- CURBS AND GUTTERS
- STORM SEWERS
- VELOCITY CONTROL DEVICES
- OTHER:

NOTE: TOP OF BMP'S SHOULD NOT BE HIGHER THAN ROADWAY ELEVATION AS NOT TO FLOOD ROADWAY UNLESS PRIOR APPROVAL FROM ENGINEER IS OBTAINED.

3. STORM WATER MANAGEMENT:

4. STORM WATER MANAGEMENT ACTIVITIES: (Sequence of Construction)

1. See construction progress schedule for schedule and duration of relevant soil disturbance and stabilization activities.
2. To the extent practicable, preserve existing vegetation, maintain a vegetative buffer along receiving waters, and phase construction activities to minimize exposure of disturbed soils.
3. Avoid storing portable sanitary units, concrete washouts, or chemicals within 50 feet upgradient of receiving waters or drainage conveyance systems without adequate pollution controls in place.
4. Protect the lake from work above; do not allow discharge of project sediment or debris.
5. Install SW3P control devices (BMPs) to protect receiving waters, downslope perimeters, and active roadways prior to soil disturbance and construction activities in the vicinity per the SW3P Site Map, as needed, or as directed by the Engineer. Do not install BMPs in any control area unless soil disturbing activities are to take place within two weeks.
6. Where work has temporarily ceased in a disturbed area (i.e. will exceed 14 days before next soil disturbance activity or initiation of final stabilization measures), temporarily stabilize soils per TXR150000 with vertical tracking, temporary seeding and/or other soil cover as appropriate or as directed by the Engineer.
7. Revegetate disturbed soils in completed areas of the project as soon as practicable or as directed by the Engineer.
8. When construction activities are completed and all project areas are stabilized with approval, remove all temporary structural controls and seed any areas disturbed by the removal. Do not remove perimeter controls until final stabilization of the area upstream.

5. NON-STORM WATER DISCHARGES:

Filter non-storm water discharges, or hold in retention basins, before being allowed to mix with storm water. These discharges consist of, but not limited to, non-polluted ground water, spring water, foundation or footing drain water, water used for dust control or pavement washing and vehicle washwater containing no detergents.

C. OTHER REQUIREMENTS & PRACTICES

1. MAINTENANCE:

Maintain all erosion and sediment controls in good working order. Perform any necessary cleaning/repairs/replacements at the earliest possible date prior to next rain event, but no later than 7 calendar days. Ensure the surrounding ground has dried sufficiently to prevent damage from equipment. "Too Wet" is the only reason for not adhering to timeframes described. When construction activities permanently or temporarily cease and are not expected to resume for 14 or more days on a disturbed portion of the site, stabilization measures must be initiated immediately.

2. INSPECTION:

A TxDOT Inspector will perform a regularly scheduled SW3P Inspection every 7 calendar days. An Inspection and Maintenance Report, signed by the TxDOT Inspector and the Contractor, will be filed for each inspection. Revise/clean/repair/replace each BMP control device in accordance with the current Field Inspection and Maintenance Report (Form 2118) and Item 1 (Maintenance) above.

3. WASTE MATERIALS:

On a daily basis, or as may be directed, collect all waste materials, trash and debris from the construction site and deposit into a metal dumpster having a secure cover and which meets all state and local city solid waste management requirements. Empty the dumpster as required by regulation, or as may be directed, at a local approved landfill site. Do not bury construction waste on the construction project site.

4. HAZARDOUS WASTE & SPILL REPORTING:

As a minimum, any products in the following categories are considered to be hazardous: Paints, Acids, Solvents, Fuels, Asphalt Products, Chemical Additives for Soil Stabilization, and Concrete Curing Compounds or Additives. When storing hazardous material on the project site, or at a Project Specific Location, take all practicable precaution to prevent and/or contain any spillage of these materials. In the event of a spill, contact the spill coordinator immediately.

5. SANITARY WASTE:

Use a licensed sanitary waste management contractor to collect all sanitary waste from portable units as may be required by local regulation, or as directed.

6. CONSTRUCTION VEHICLE TRACKING:

On a regular basis, or as may be directed, dampen haul roads for dust control and construct construction entrances/exits. Provide for a motorized broom or vacuum type sweeper to be available on a daily basis, or as may be directed, to remove sediment from paved roadways on project, abutting and traversing the project site.


7. MANAGEMENT PRACTICES:

- A. Construct disposal areas, stockpiles, haul roads and PSL's in a manner that will minimize and control the amount of sediment that may enter receiving waters. Do not locate disposal areas in any wetland, waterbody or streambed.
- B. Locate construction staging areas, vehicle maintenance and PSL's areas in a manner to minimize the runoff of pollutants.
- C. When working in or near a wetland, install and maintain operating soil erosion and sediment controls at all times during construction and isolate the work from the wetland.
- D. Clear all waterways as soon as practicable of temporary embankment, temporary bridges, matting, falsework, piling, debris or other obstructions placed during construction operations that are not a part of the finished work.
- E. Procedures and/or practices should be taken to control dust.
- F. Sediment to be removed from roadways daily or when work begins after weather events if construction activities have ceased due to weather event.

FILE NAME

DATE

DESIGNER



Juan A. Paredes, P. E.
 Signature of Registrant & Date



DALLAS DISTRICT ENVIRONMENTAL

STORM WATER POLLUTION PREVENTION PLAN (SW3P)

TEMPLATE REVISION DATE: 02/07/18

DESIGN MK	FED. RD. DIV. NO. 6	FEDERAL AID PROJECT NO. (SEE TITLE SHEET)		HIGHWAY NO. SH 34
GRAPHICS MK	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK AM	TEXAS	DALLAS	ELLIS	61
CHECK JP	CONTROL	SECTION	JOB	
	0568	01	059	

DISCLAIMER:
 The use of this standard is governed by the Texas Engineering Practice Act. No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damage resulting from its use.

Notes To Designer:
 1. Do not alter Sheet Design or Font style, size or weight - match text attributes.
 2. If additional space is needed for a numbered section, fence and adjust sections up or down as needed for proportioning and readability but do not relocate from its relative position.
 3. All areas should be addressed thoroughly and verify the necessary pay items are set up to support actions needed.
 Prepared by: Name/Section

I. STORMWATER POLLUTION PREVENTION PLAN-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List adjacent MS 4 Operator(s) that receive discharges from this project. They need to be notified prior to construction activities.

(Note: Leave blank only if no adjacent MS 4 Operator(s) are affected.)

- 1.
- 2.

No Action Required Required Action

Action Number:

1. Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000.
2. Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
3. Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas. No equipment is allowed in any stream channel below the ordinary High Water Mark except on approved temporary stream crossings or drill pods.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required:

Required Actions: List Waters of the US Permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

- 1.
- 2.
- 3.

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices for applicable 401 General Conditions:

(Note: If CORP Permit not required, do not check boxes.)

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

No Action Required Required Action

Action Number:

- 1.
- 2.

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical.

Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751 & 752 in order to comply with requirements for invasive species, beneficial landscaping and tree/brush removal commitments.

No Action Required Required Action

Action Number:

- 1.
- 2.

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS TREATY ACT.

No Action Required Required Action

Action Number:

1. The following species could occur in the project area: sandbank pocketbook, Texas heelsplitter, alligator snapping turtle, Woodhouse's toad, southern crawfish frog, bald eagle, muskrat, long-tailed weasel, eastern spotted skunk, slender glass lizard, Texas garter snake, and timber rattlesnake. Follow the Special Notes and BMPs listed below to protect the species.

2. Freshwater mussel survey is required for the sandbank pocketbook and Texas heelsplitter parallel to the lake shoreline at and in the immediate vicinity of 32.288223, -96.655152 and 32.278521, -96.667092. TxDOT to complete the survey at the crossing between the months of April to November prior to disturbance.

3. To protect nesting birds, contractor to remove nests noted beneath the SH 34 bridge over Bardwell Lake, between October 1 and February 15 after nests have been verified as inactive. Additional nests may be present within the project area, that could be utilized by birds or other wildlife, contractors to adhere to Special Notes #1-3 below.

CONTINUED IN NEXT COLUMN (AFTER SECTION VII)

Special Notes:

1. Avoid harming all wildlife species if encountered and allow them to safely leave the project site. Due diligence should be used to avoid killing or harming any wildlife species in the implementation of transportation projects.

2. If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

3. The Migratory Bird Act of 1918 states that it is unlawful to kill, capture, collect, possess, buy, sell, trade or transport any migratory bird, nest, young, feather or egg in part or in whole, without a federal permit issued in accordance with the Act's policies and regulations. The contractor would remove all old migratory bird nests from any structure or trees where work would be done from October 1 to February 15. In addition, the contractor would be prepared to prevent migratory birds from building nest(s) between February 15 to October 1. In the event that migratory birds are encountered on-site during project construction, efforts to avoid adverse impacts on protected birds, active nests, eggs and/or young would be observed.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
NBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: National Wetlands Permit	USACE: U.S. Army Corp of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Safety Data Sheets (SDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bore ground and covered, for products which may be hazardous. Maintain product labeling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the SDS. In the event of a spill, take actions to mitigate the spill as indicated in the SDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- Dead or distressed vegetation (not identified as normal)
- Trash piles, drums, canisters, barrels, etc.
- Undesirable smells or odors
- Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation(s) or replacement(s) (bridge class structures not including box culverts)?

Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

No Action Required Required Action

Action Number:

- 1.

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

No Action Required Required Action

Action Number:

- 1.

SECTION V. CONTINUED

4. Contractor to implement the following BMPs from "Beneficial Management Practices: Avoiding, Minimizing, and Mitigating Impacts of Transportation Projects on State Natural Resources" available at <https://ftp.txdot.gov/pub/txdot-info/env/toolkit/300-01-bmp.pdf>

- a. Minimize impacts to wetland habitats including isolated ephemeral pools
- b. Minimize impacts to wetlands and riverine habitats
- c. Section 2.4.3 Freshwater Mussel BMP
- d. Section 2.6.1 Aquatic Amphibian and Reptile BMP (barrier fencing not required)
- e. Section 2.6.2 Terrestrial Amphibian and Reptile BMP
- f. Section 1.4 Water Quality BMP
- g. Section 1.2 Vegetation BMP
- h. Section 2.2.1 Bird BMP

GENERAL NOTE:

Any change orders and/or deviations from the final design must be reported to the Engineer prior to commencement of construction activities, as additional environmental clearance may be required.




ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS (EPIC)


FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		HIGHWAY NO.
6	SEE TITLE SHEET		SH 34
STATE	DISTRICT	COUNTY	
TEXAS	DALLAS	Ellis	SHEET NO.
CONTROL	SECTION	JOB	
0568	01	059	63

DISCLAIMER:
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 4/12/2022
FILE: pw:\txdot.projectwiseonline.com:TXDOT5\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10. Miscellaneous\ec316.dgn

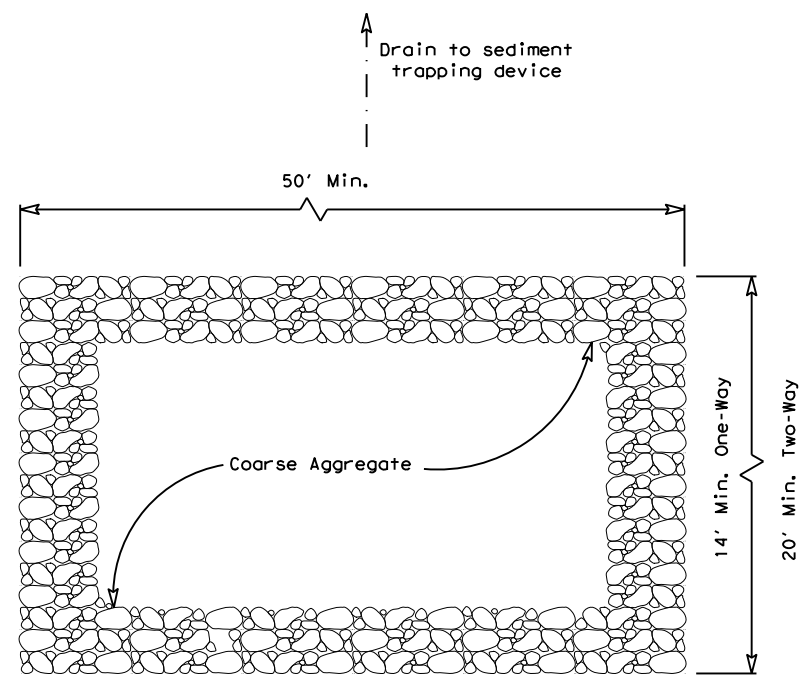

PLAN VIEW

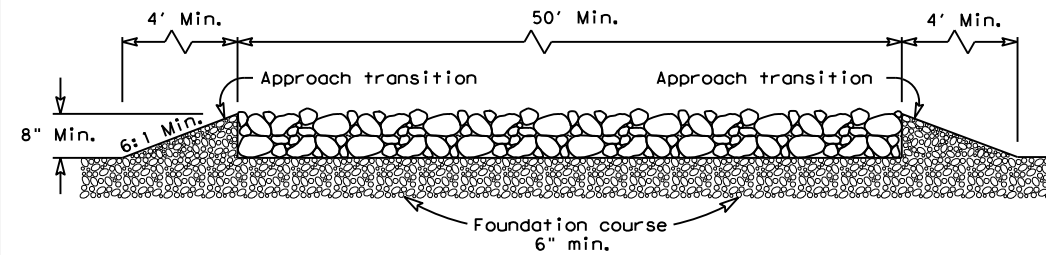


ELEVATION VIEW


CONSTRUCTION EXIT (TYPE 1)
ROCK CONSTRUCTION (LONG TERM)

GENERAL NOTES (TYPE 1)

- The length of the type 1 construction exit shall be as indicated on the plans, but not less than 50'.
- The coarse aggregate should be open graded with a size of 4" to 8".
- The approach transitions should be no steeper than 6:1 and constructed as directed by the Engineer.
- The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other materials approved by the Engineer.
- The construction exit shall be graded to allow drainage to a sediment trapping device.
- The guidelines shown hereon are suggestions only and may be modified by the Engineer.
- Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the full width of the exit, or as directed by the engineer.

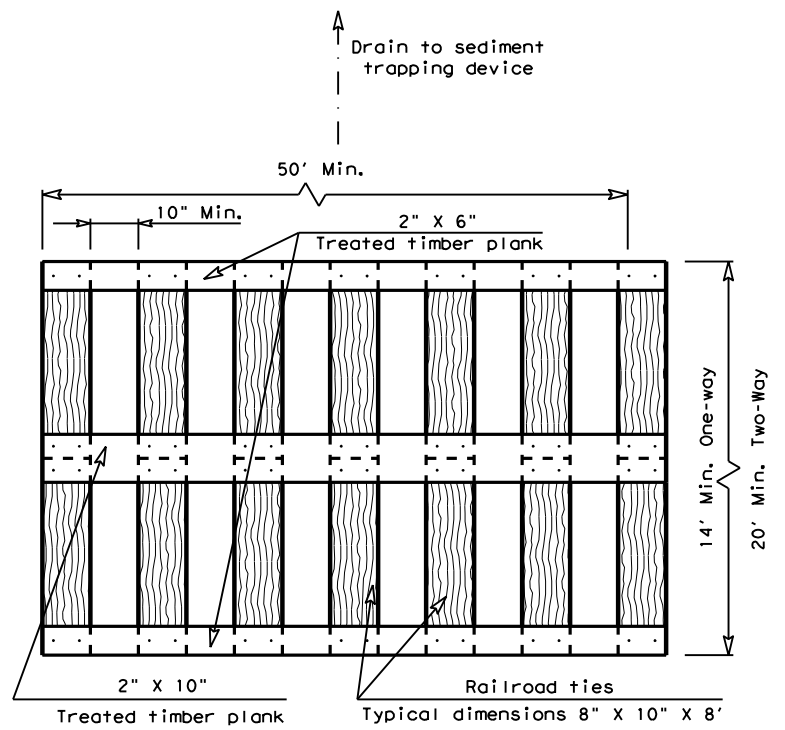

PLAN VIEW

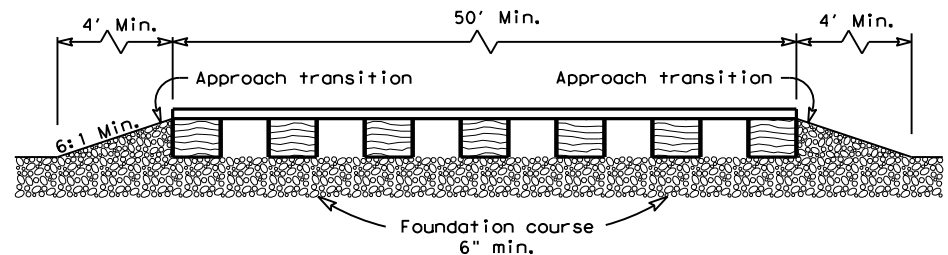


ELEVATION VIEW


CONSTRUCTION EXIT (TYPE 2)
TIMBER CONSTRUCTION (LONG TERM)

GENERAL NOTES (TYPE 2)

- The length of the type 2 construction exit shall be as indicated on the plans, but not less than 50'.
- The treated timber planks shall be attached to the railroad ties with 1/2" x 6" min. lag bolts. Other fasteners may be used as approved by the Engineer.
- The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
- The approach transitions shall be no steeper than 6:1 and constructed as directed by the Engineer.
- The construction exit foundation course shall be flexible base, bituminous concrete, portland cement concrete or other material as approved by the Engineer.
- The construction exit should be graded to allow drainage to a sediment trapping device.
- The guidelines shown hereon are suggestions only and may be modified by the Engineer.
- Construct exits with a width of at least 14 ft. for one-way and 20 ft. for two-way traffic for the full width of the exit, or as directed by the engineer.

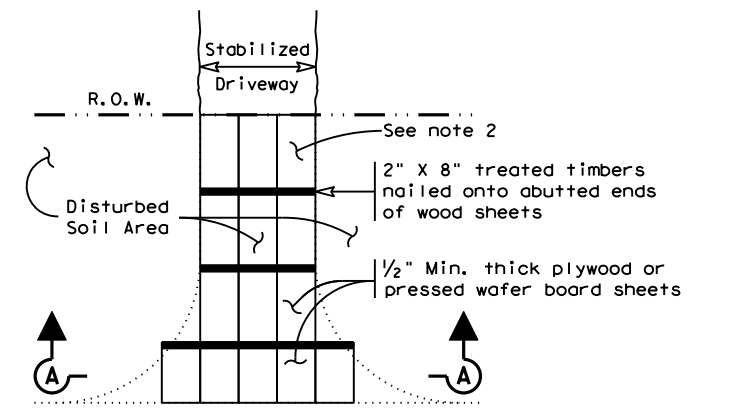

PLAN VIEW

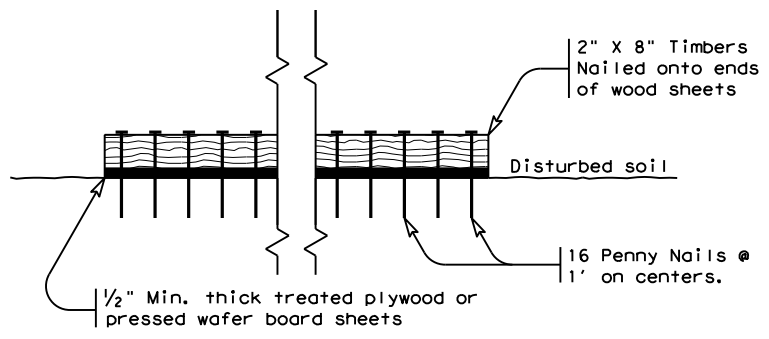


SECTION A-A
CONSTRUCTION EXIT (TYPE 3)
SHORT TERM

GENERAL NOTES (TYPE 3)


- The length of the type 3 construction exit shall be as shown on the plans, or as directed by the Engineer.
- The type 3 construction exit may be constructed from open graded crushed stone with a size of two to four inches spread a min. of 4" thick to the limits shown on the plans.
- The treated timber planks shall be #2 grade min., and should be free from large and loose knots.
- The guidelines shown hereon are suggestions only and may be modified by the Engineer.

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES CONSTRUCTION EXITS EC(3)-16			
FILE: ec316	DN: TxDOT	CK: KM	DW: VP
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	0568 01	059	SH 34
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	64	


DATE: 4/12/2022
 FILE: p:\txdot\projectwiseonline.com\TXDOTS\Documents\18 - DAL\Design Projects\056801059V4 - Design\Plan Set\10. Miscellaneous\ec916.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

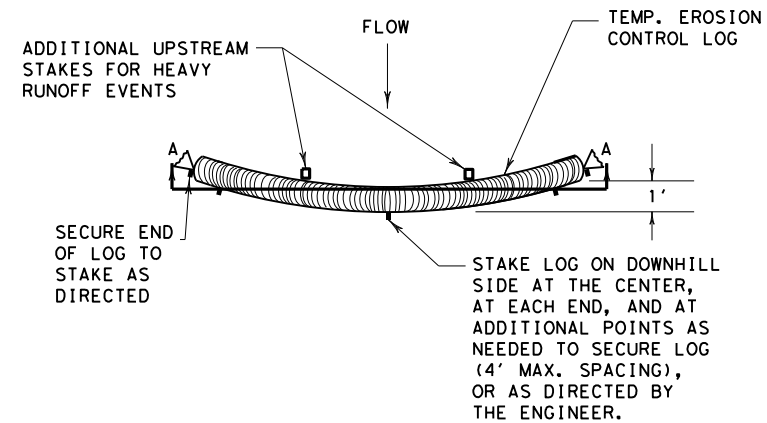


PLAN VIEW

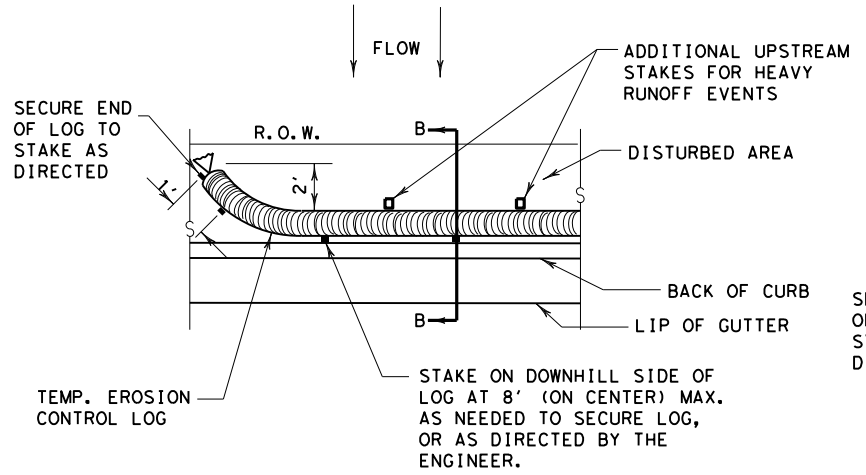

PLAN VIEW

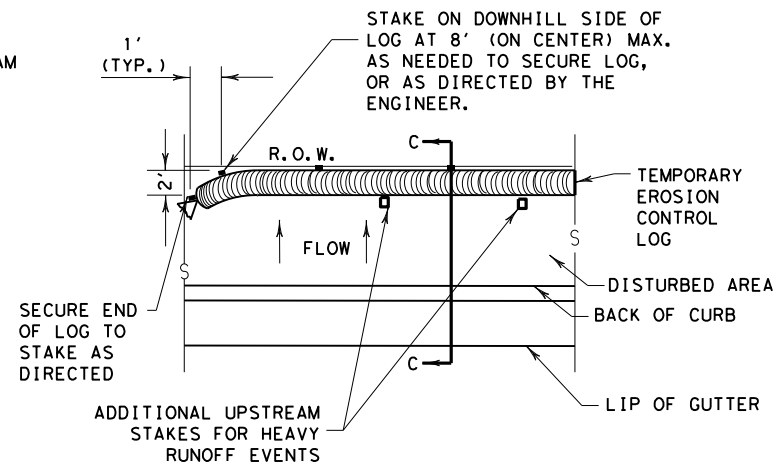


PLAN VIEW

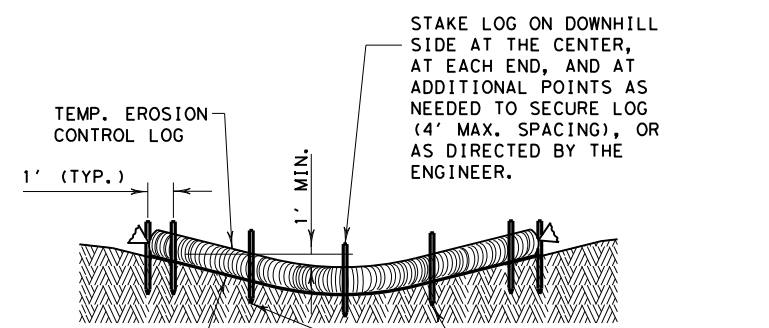

SECTION A-A

EROSION CONTROL LOG DAM


CL-D

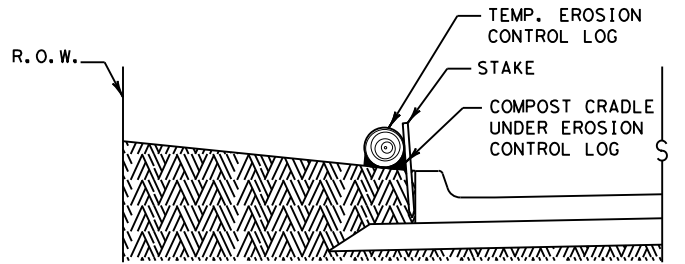

SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB


CL-BOC

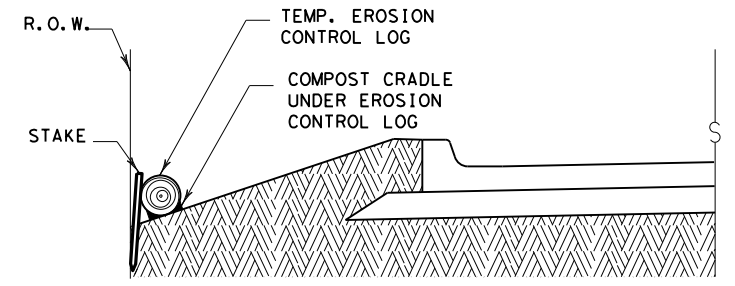

SECTION C-C


EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

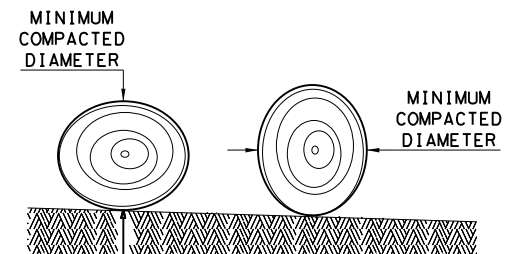

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

- LEGEND**
- CL-D EROSION CONTROL LOG DAM
 - CL-BOC EROSION CONTROL LOG AT BACK OF CURB
 - CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
 - CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
 - CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
 - CL-DI EROSION CONTROL LOG AT DROP INLET
 - CL-CI EROSION CONTROL LOG AT CURB INLET
 - CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET



REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.


GENERAL NOTES:

1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0568	01	059
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	65	

DATE: 4/12/2022
 FILE: p:\txdot\projectwiseonline.com\TXDOT5\Documents\18 - DAL\Design Projects\056801059V4 - Design\Plan Set\10. Miscellaneous\ec916.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

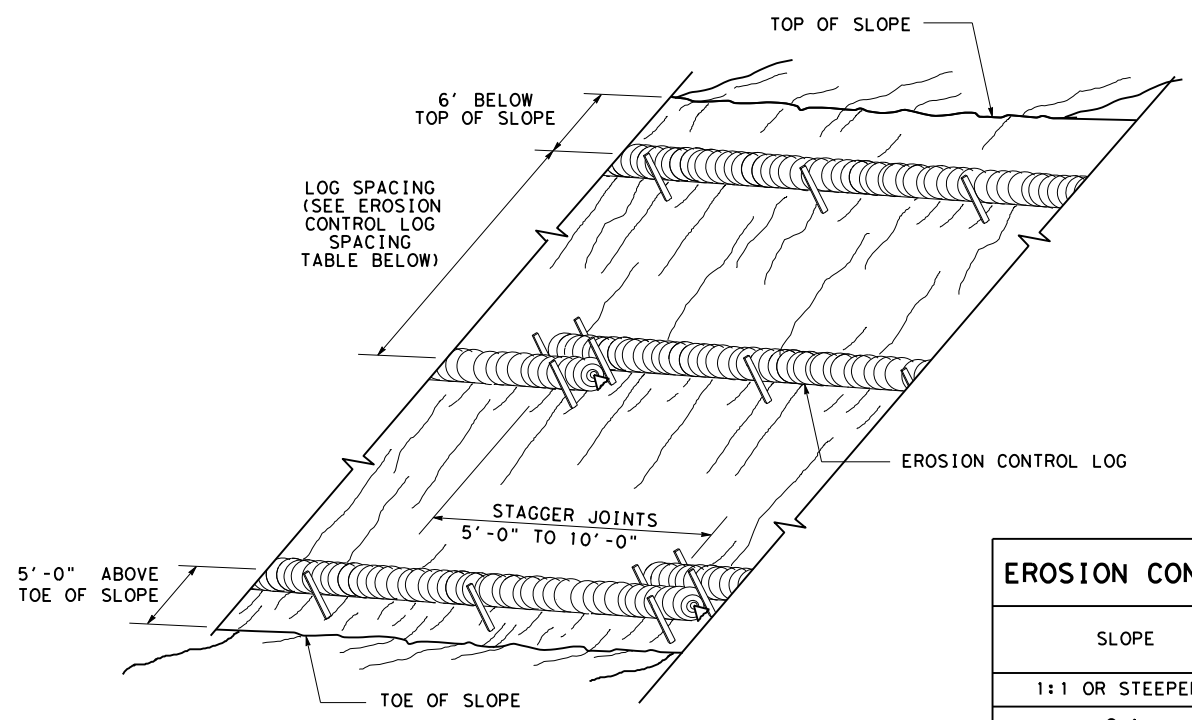

**EROSION CONTROL LOGS ON SLOPES
STAKE AND TRENCHING ANCHORING**


CL-SST

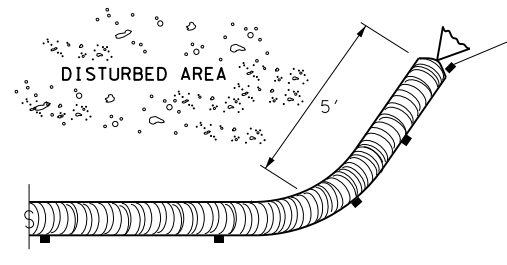

END SECTION RAP DETAIL


EROSION CONTROL LOG SPACING TABLE				
SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
 SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
 HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

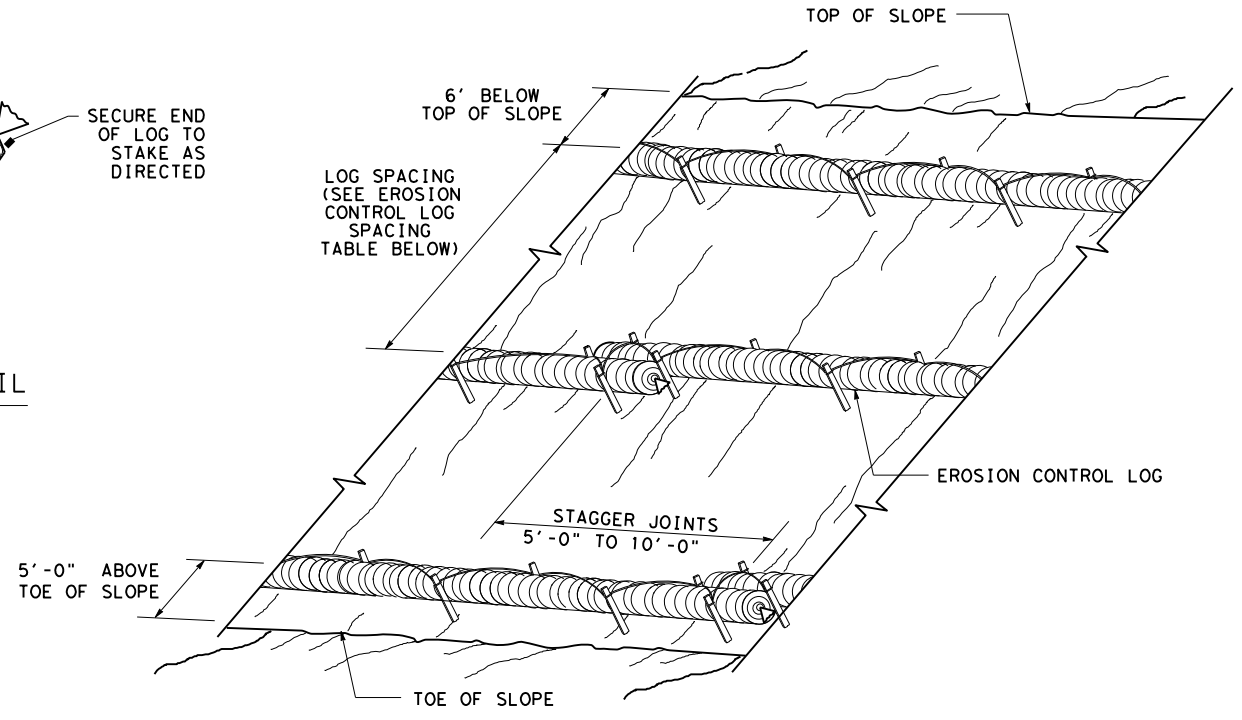



**EROSION CONTROL LOGS ON SLOPES
STAKE AND LASHING ANCHORING**

CL-SSL

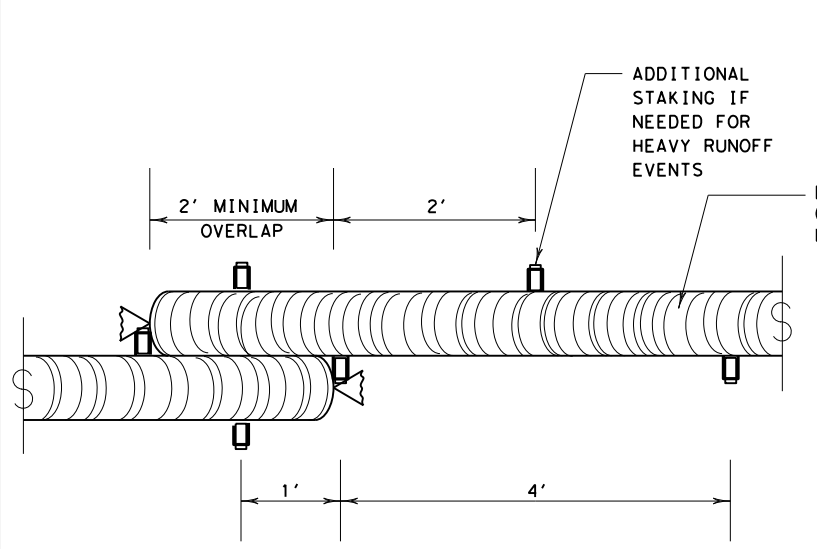


STAKE AND TRENCHING ANCHORING DETAIL

CL-SST

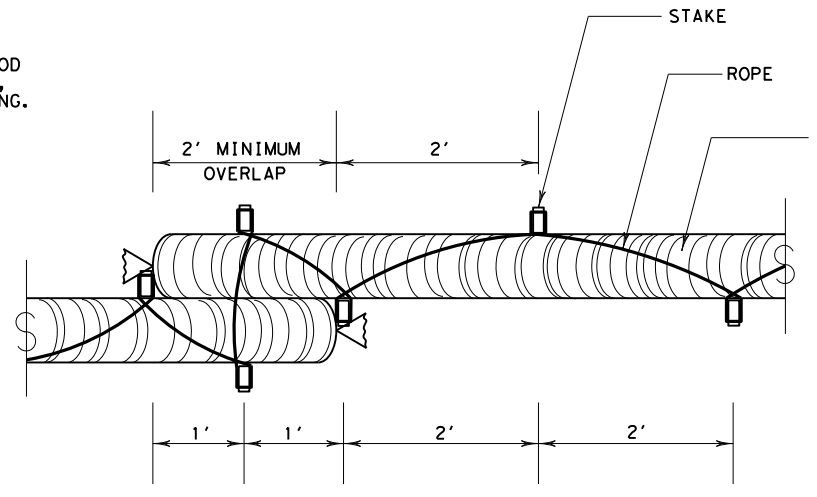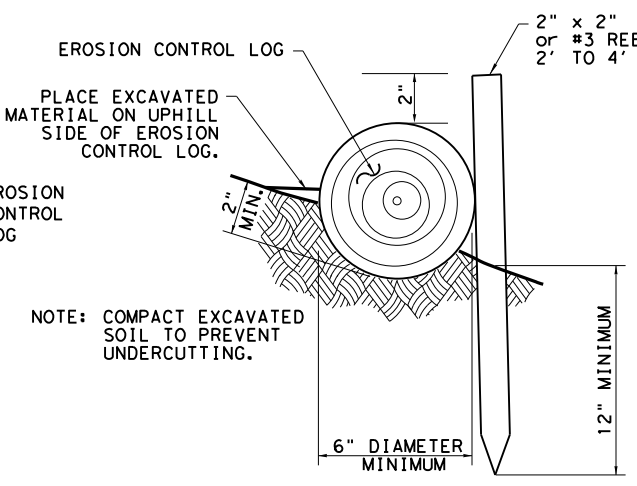


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

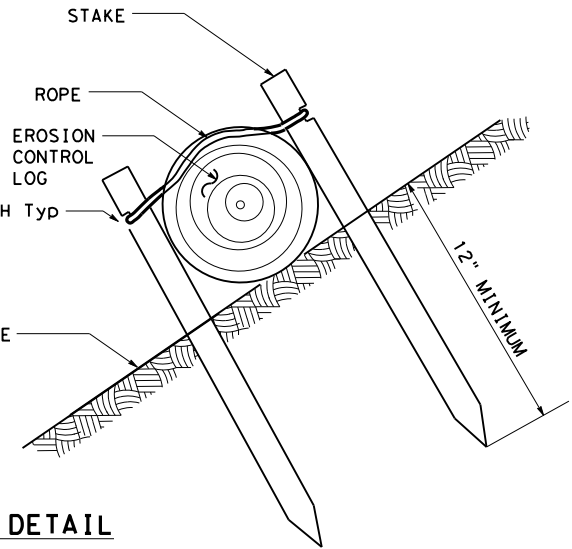

TRENCH DEPTH TABLE	
LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"




STAKE NOTCH DETAIL

SHEET 2 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	0568 01	059	SH 34
DIST	COUNTY	SHEET NO.	
DAL	ELLIS	66	


DATE: 4/12/2022
 FILE: p:\txdot\projectwise\online.com\TXDOT\Documents\18 - DAL\Design Projects\056801059\4 - Design\Plan Set\10. Miscellaneous\ec916.dgn

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

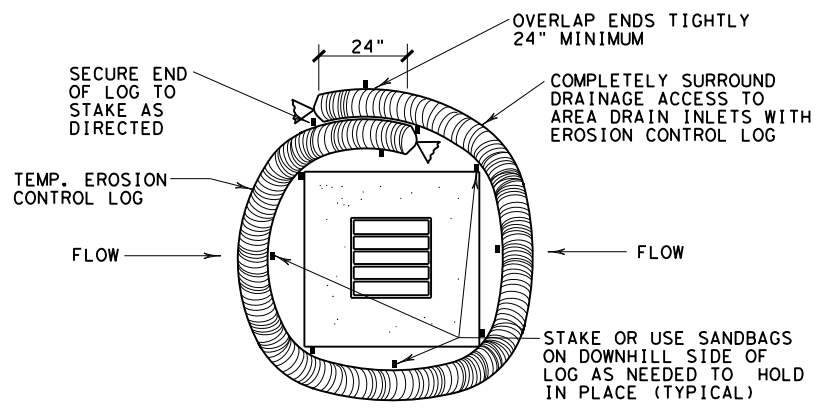


EROSION CONTROL LOG AT DROP INLET

CL-DI

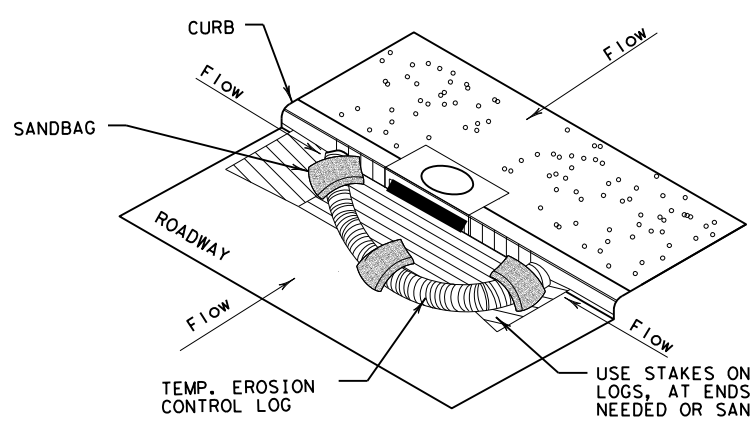

EROSION CONTROL LOG AT CURB INLET


CL-CI

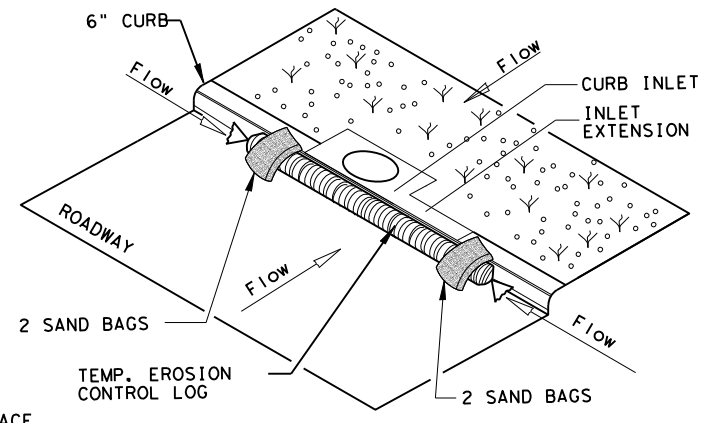

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

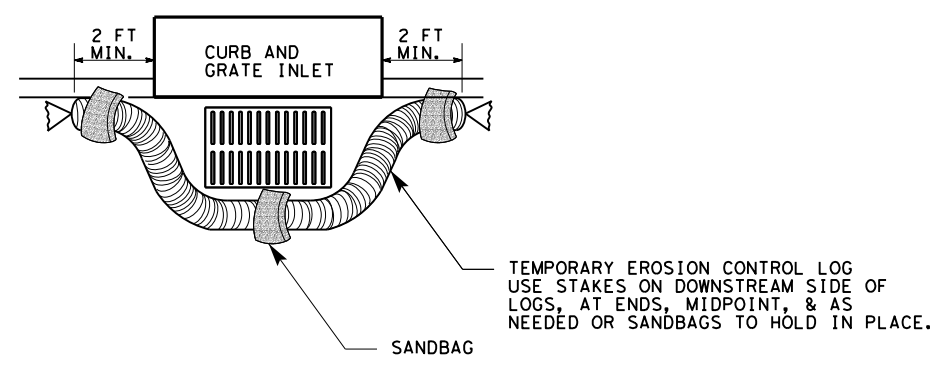

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

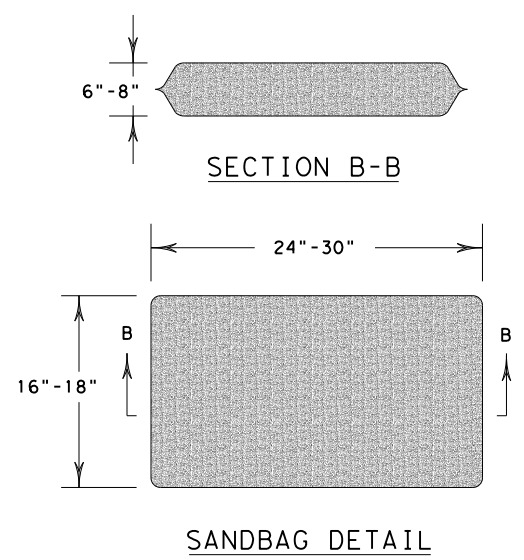

SHEET 3 OF 3

		<i>Design Division Standard</i>	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0568	01	059
DIST	COUNTY		SHEET NO.
DAL	ELLIS		67