


STATE OF TEXAS
TEXAS DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT

PROJECT NO: MMC 6451-87-001
CSJ: 6451-87-001

LIMITS:
FOR PURCHASE & DELIVERY OF MATERIALS ONLY:
HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT

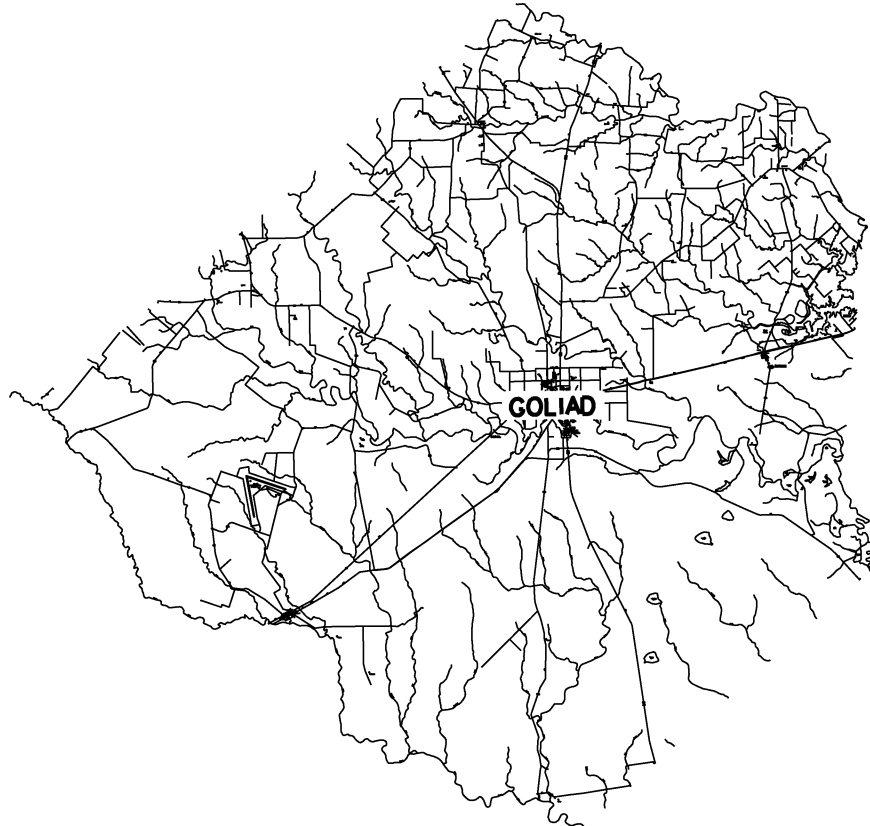

•GOLIAD MAINTENANCE OFFICE AREA OF RESPONSIBILITY

INDEX OF SHEETS

- 1 TITLE SHEET
- 2A-2D GENERAL NOTES
- 3 ESTIMATE & QUANTITY SHEET
- 4 PLAN SHEET & SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT



SUBMITTED 8/18/2023
FOR LETTING DocuSigned by:
Armando Bosquez
BRIDGE ENGINEER

APPROVED 8/18/2023
FOR LETTING: DocuSigned by:
James Harris
DIRECTOR OF MAINTENANCE

Project Number: MMC 6451-87-001

County: Goliad

Control: 6451-87-001

General Notes:

This contract shall commence upon the issuance of a work order by the Director of Maintenance or his representative and shall continue for 180 calendar days. This project consists of described work defined with item 8013, Hot-Mix Cold-Laid Asphalt Concrete Pavement (Material Only) the 2014 Texas Standard Specifications, General Notes and Plans. See estimate and quantity sheet for type and quantity of materials.

This purpose of this contract is to supply HMCL ACP TYPE D (DELIVERY) at the following locations:

Site 1	Goliad Maintenance Office, 817 Pearl St., Goliad TX 77963
Site 2	Roadways within Goliad Maintenance Area

Coordinate work through the following individuals:

Area Engineer	Address	Contact Information
Karnes City Area Office	800 South U.S. 181 Karnes City, TX 78118	Nick Novosad, P.E. Nick.Novosad@txdot.gov
Assistant Area Engineer	800 South U.S. 181 Karnes City, TX 78118	Roberto Jimenez, P.E. Roberto.Jimenez@txdot.gov
Maintenance Section	Address	Contact Information
Goliad	817 Pearl St. Goliad, TX 77963	Ernest Perry Ernest.perry@txdot.gov

SECTION 10.2 – Instructions to Bidders:

This project includes plan sheets that are not part of the bid proposal. View or download plans at:

<http://www.txdot.gov/business/letting-bids/plans-online.html>

All Contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

Project Number: MMC 6451-87-001

County: Goliad

Control: 6451-87-001

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name. Contractor questions will only be accepted through email to the above individuals.

SECTION 10.3 – AWARD AND EXECUTION OF CONTRACT:

If several contracts are awarded to the same contractor, the contractor shall be sufficiently equipped to concurrently supply each contract material. Each contract awarded by the Department stands on its own and as such, is separate from other contracts.

Material requests shall be issued by Work Order to the Contractor a minimum of 15 calendar days in advance unless expedited items therefore allowing a minimum of 48 hours. Each Work Order shall specify quantities to be delivered, location of delivery, and days to complete Work Order.

SECTION 10.4 – SCOPE OF WORK:

Prior to beginning operations, schedule and participate in a coordination call or virtual meetings with the Engineer or designated representative to establish points of contact for communication, an issue escalation ladder, delivery location details, and other Contract requirements. Work with Engineer to resolve or escalate all issues.

In accordance with Article 10.4.3, TXDOT does not guarantee a specific volume to be purchase. No minimum compensation to the Contractor is guaranteed. Quantities indicated for each Item in the Contract are estimates only and are based on the previous usage. These estimates should not be construed as a minimum or maximum quantity to be ordered. The acceptance of this contract also does not guarantee that any materials may be

SECTION 10.6 – CONTROL OF MATERIALS:

The Contractor is responsible for furnishing and delivering the Hot-Mix Cold-Laid Asphalt Concrete Pavement to the agreed upon location(s). The delivery hours will be Monday through Friday 7:00 AM to 5:00 PM. Contractor shall furnish all material in accordance with applicable specifications, test methods and general notes in the Contract and as directed by the Engineer.

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

SECTION 10.8 – PROSECUTION AND PROGRESS:

Contract time charges shall begin upon issuance of "Authorization to Begin Work" letter. This contract is for one-hundred and eighty (180) calendar days and shall be computed and charged in accordance with Article 10.8.2, "Contract Term".

Project Number: MMC 6451-87-001

County: Goliad

Control: 6451-87-001

All material delivery tickets must include the Work Order number and be signed, dated, and list the arrival/departure times by the Department representative upon arrival at final delivery location.

In the event of a delay in delivery of materials notify the Maintenance Supervisor for the work order immediately by phone and provide documentation, in writing, to the office of record upon completion of delivery.

Failure to complete a work order will incur damages in accordance with Article 10.8.6. Actual damages incurred will be deducted from the work order payment and calculations will be provided upon request.

SECTION 10.9 – MEASUREMENT AND PAYMENT:

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

Trucks may be held up for 2-hours at the jobsite at no additional expense to the Department. Written documentation of arrival will be used when calculation demurrage charges and included on an invoice submitted to the managing office. The Department will specify the arrival time and delivery frequency on the work order provided to the Contractor. If the Contractor arrives prior to the specified delivery time, the 2-hour hold will not begin until the arrival time specified on the work order.

Demurrage charges (an amount billed to the Department when the vendor incurs a wait time of more than two hours) Contractor will provide demurrage rate per truck, per 15-min increment, and the Coordination call prior to beginning work on the Contract. Demurrage charges will be invoiced in 15-min increments, rounded down to the nearest whole increment. Contractor will be required to provide documentation for the demurrage per truck.

Actual Damage charges (when a vendor is unable to meet delivery requirement and TxDOT suffers a verifiable loss as a result.) If advanced notice is not approved and the Department must obtain material through another source, the Department could seek damages for any costs exceeding the Contract bid items.

Project Number: MMC 6451-87-001

County: Goliad

Control: 6451-87-001

ITEM 8013 – Hot-Mix Cold-Laid Asphalt Concrete Pavement (Material Only)

Deliver Hot-Mix Cold-Laid ACP to the maintenance office or roadway in end dumps unless otherwise directed by the Maintenance Supervisor.


Schedule the trucking so that all the trucks ordered for each round arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.

A minimum of 20 Tons per work order will be required for delivery only.

Site Locations:


HMCL ACP TYPE D (DELIVERY)(SITE 1): Goliad Maintenance Office at 817 Pearl St.
Goliad, TX 77963.

HMCL ACP TYPE D (DELIVERY)(SITE 2): Roadways within Goliad Maintenance Office area of responsibility.

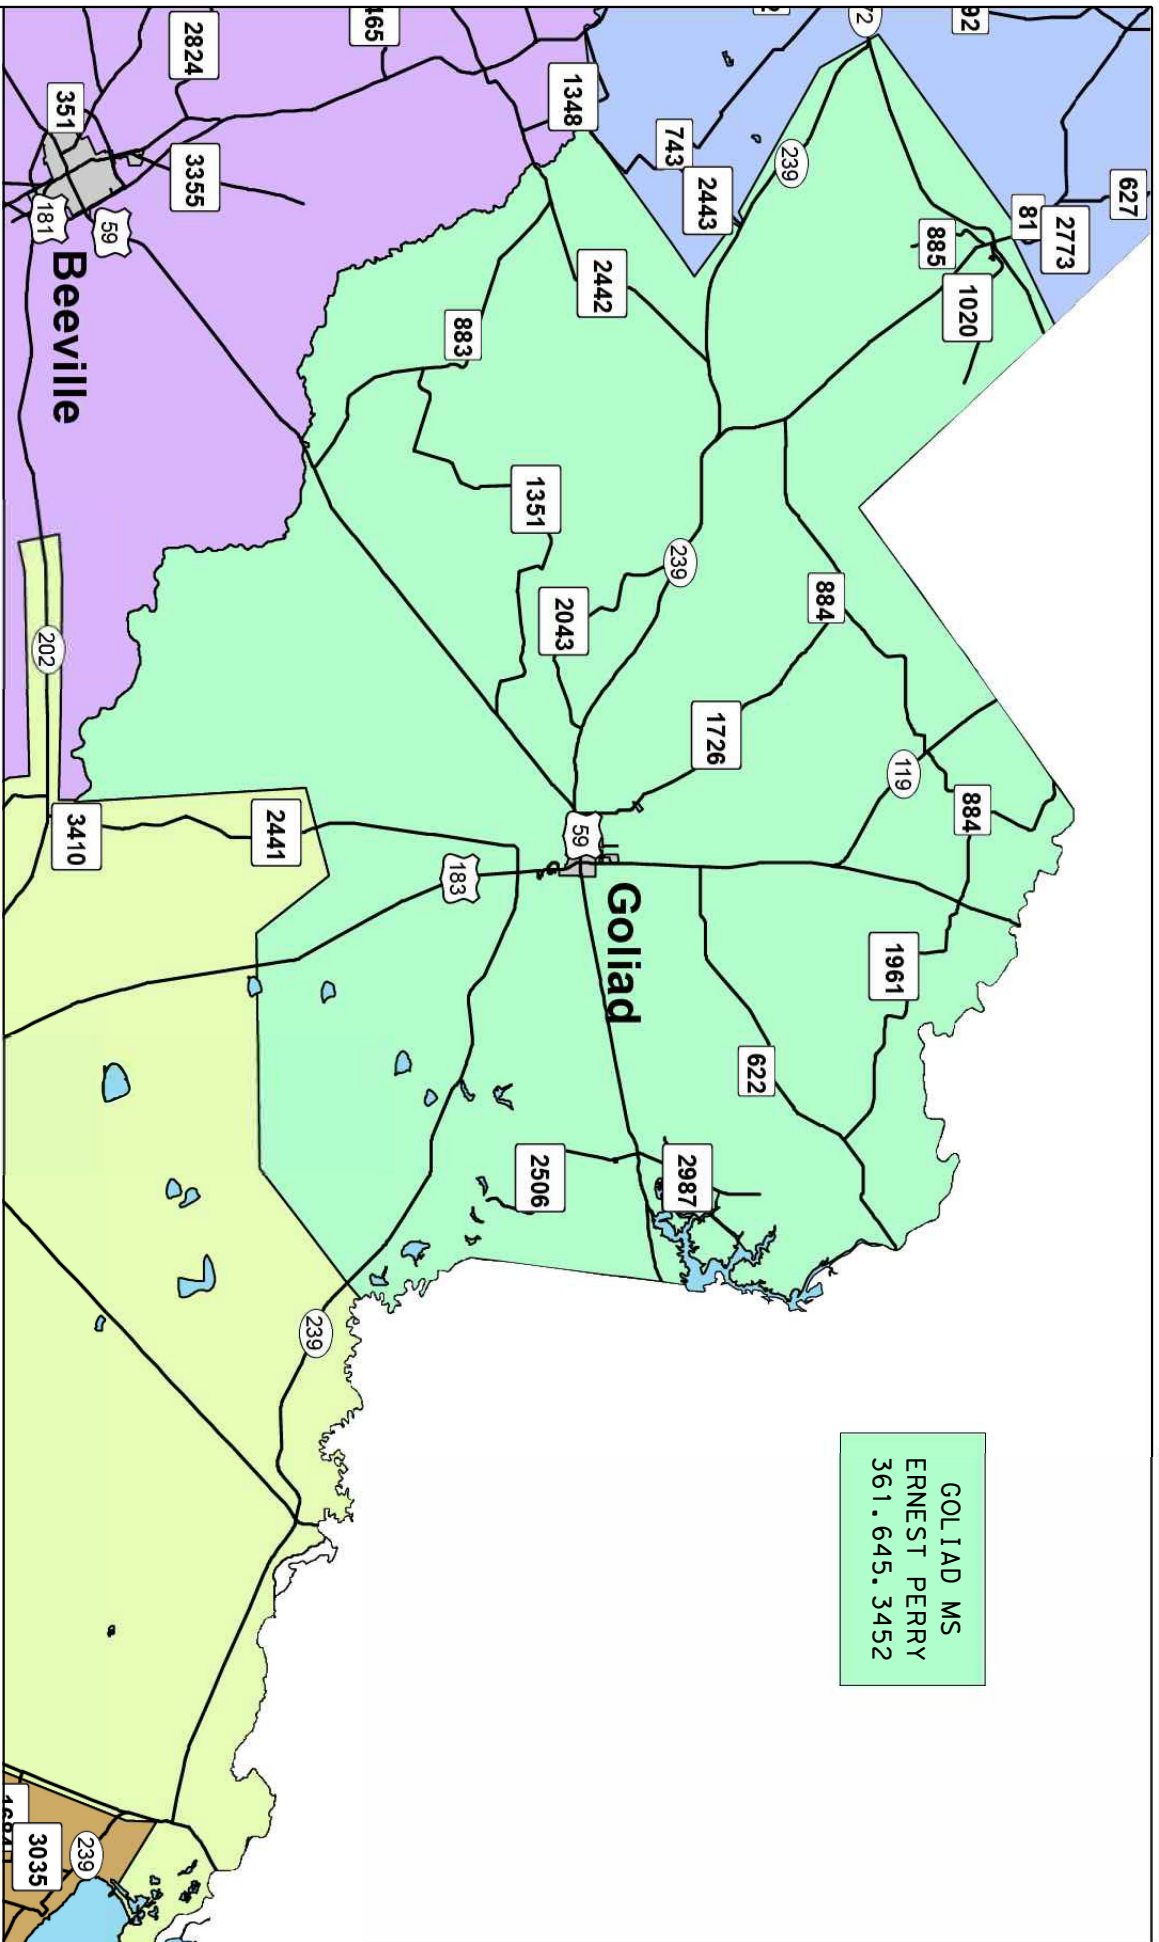

ITEM NO.	DESC NO.	SPEC NO.	DESCRIPTION	UNIT	QTY
8013	6009		HMCL ACP TYPE D (DELIVERY) (SITE 1)	TON	500
8013	6010		HMCL ACP TYPE D (DELIVERY) (SITE 2)	TON	1,900

**PLAN SHEET
& SUMMARY**



CONT	SECT	JOB	HIGHWAY
6451	87	001	US 59, ETC
DIST	COUNTY	SHEET NO.	
16	GOLIAD	4	