

# STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

## MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC 644925001  
CSJ: 6449-25-001  
HIGHWAY: IH 20  
LIMITS OF WORK: ABILENE DISTRICT CENTRAL

FOR PURCHASE AND DELIVERY OF MATERIALS ONLY: D-GR HOT MIX MIXTURES

SUBMITTED FOR  
LETTING: 8/3/2023  
Date

APPROVED FOR  
LETTING: 8/3/2023  
Date

DocuSigned by:  
*Ernest Piske Jr*  
\_\_\_\_\_  
Ernest Piske  
CONTRACT SPECIALIST

DocuSigned by:  
*Cal Hays P.E.*  
\_\_\_\_\_  
Cal Hays, P.E.  
MAINTENANCE ENGINEER

### INDEX OF SHEETS

- |       |                           |
|-------|---------------------------|
| 1     | TITLE SHEET               |
| 2A-2B | GENERAL NOTES             |
| 3     | ESTIMATE & QUANTITY SHEET |
| 4     | PLAN SHEET & SUMMARY      |

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

© 2023



**Project Number:** MMC 6449-25-001**County:** Nolan County**Control:** 6449-25-001**Highway:** IH 0020**GENERAL NOTES:****General:**

This purpose of this contract is to supply **D-GR HMA(SQ) TY B PG 64-22, D-GR HMA(SQ) TY D PG 64-22** at the following locations:

Site 1	Taylor County Maintenance Section
Site 2	Nolan County Maintenance Section
Site 3	Jones County Maintenance Section
Site 4	Fisher County Maintenance Section
Site 5	Stonewall County Maintenance Section
Site 6	Callahan County Maintenance Section

**This contract is non-site specific. Material should be bid assuming delivery to any point in the county specified.** Materials shall be delivered to the locations specified in Work Orders. Estimated quantities are specified in the plans.

Each contract awarded by the Department stands on its own as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Contractor questions on this project are to be emailed to the following individuals:

Paul Norman, P.E.  
 Director of Maintenance  
 4250 N. Clack St.  
 Abilene, Texas 79601  
 Phone (325) 676-6870  
[paul.norman@txdot.gov](mailto:paul.norman@txdot.gov)

Cal Hays, P.E.  
 Maintenance Engineer  
 4250 North Clack  
 Abilene, TX 79601  
 Phone (325) 676-6858  
[cal.hays@txdot.gov](mailto:cal.hays@txdot.gov)

All Contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

**Section 10.2 - Instructions to Bidders:**

This project includes plan sheets that are not part of the bid proposal. View or download plans at:

<https://www.dot.state.tx.us/business/plansonline/ftpinfo.htm>

**Project Number:** MMC 6449-25-001  
**County:** Nolan County

**Control:** 6449-25-001  
**Highway:** IH 0020

**Section 10.4 – Scope of Work:**

Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

In accordance with Article 10.4.3.1, this contract may be extended **twice** not to exceed **549** calendar days for the entire contract term if mutually agreed.

**Section 10.6 – Control of Materials**

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website:

[http://www.txdot.gov/business/contractors\\_consultants/producer\\_list.htm](http://www.txdot.gov/business/contractors_consultants/producer_list.htm)

**Section 10.8 - Prosecution and Progress:**

There are **183** calendar days on this contract. Calendar days will be charged in accordance with Article 10.8.2., "Contract Term".

**Section 10.9 – Measurement and Payment:**

Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for delivery.

Force account work is being added by lump sum to cover contractor's miscellaneous costs such as demurrage, diversion fees, additional mileage, and overnight fees. These costs will be paid upon receipt of a written invoice provided by the contractor.

**Item 8011– D-GR HMA Mixtures (Small Quantity) (Materials Only)**

Minimum daily order quantity shall be one hundred (100) tons. This amount is per contract, meaning that the cumulative total daily tonnage across all locations in the contract will be no less than 100 tons.


A 48-hour lead time will be standard for blade-laying operation Work Orders.

A minimum 14 calendar-day lead time will be given on Work Orders when 1,000 tons or more is requested at a specific location on a single day for laydown machine operations.

Transport truck shall deliver material at location specified with the trailer type specified in the work order.

Failure to meet requested daily tonnage per location will result in Special Deduction.



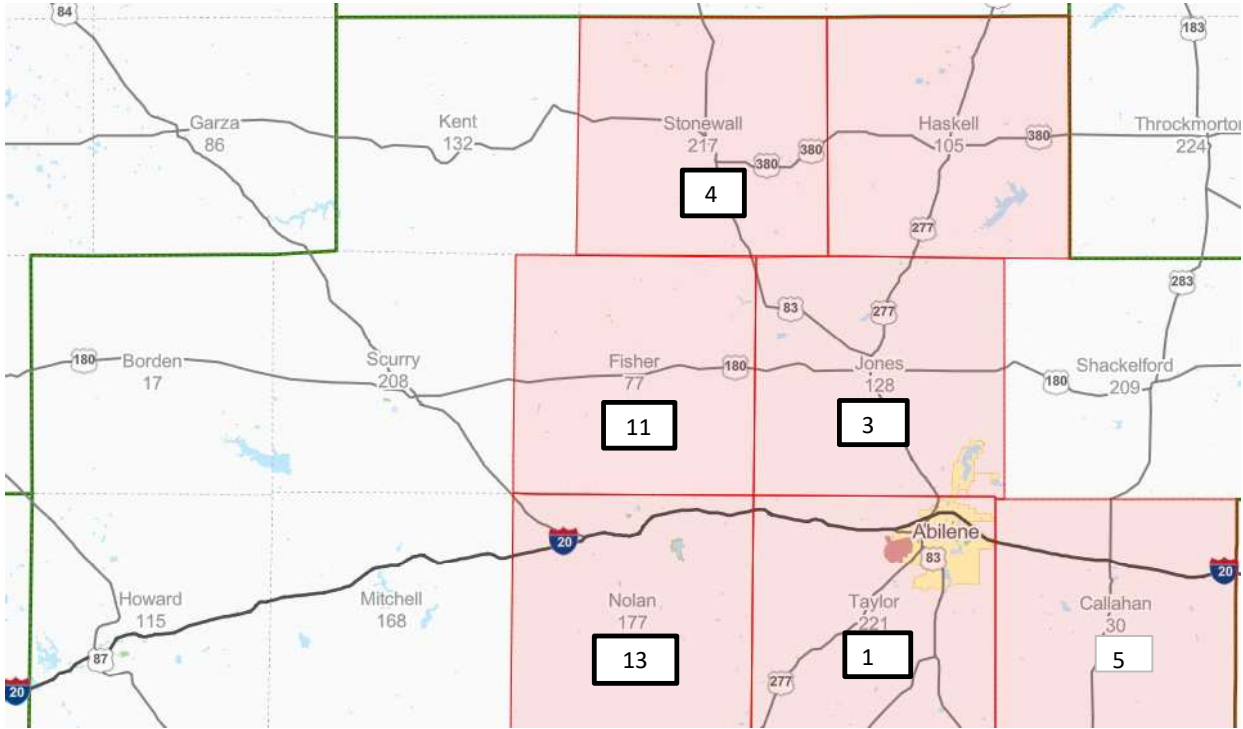

Stonewall, Fisher, Jones, Nolan, Taylor, Callahan Counties

LOC	COUNTY
1	TAYLOR
3	JONES
4	STONEWALL
5	CALLAHAN
11	FISHER
13	NOLAN

**PLAN SHEET SUMMARY**

© 2023

