STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC - 645467001 CSJ 6454-67-001 HIGHWAY: US0190 DELIVERY LOCATION(S): VARIOUS

FOR PURCHASE AND DELIVERY OF MATERIALS ONLY: LIMESTONE ROCK ASPHALT FOR SAN SABA COUNTY

Submitted for Letting:	8/24/2023	Approved for Letting:	8/24/2023	
	Date	_	Date	
	DocuSigned by: Tina (rulia 76C8A3E5D7D24C9		DocuSigned by: Blake Stembridge A2E1607EC542461	
(Contract Specialist	Ma	intenance Engineer	

INDEX OF SHEETS

- 1 TITLE SHEET
- 2-4 GENERAL NOTES
- 5 ESTIMATE & QUANTITY SHEET
- 6 STOCKPILE LOCATION MAP

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.



FED.RD. DIV.NO.	PROJE	SHEET NO.		
6	MMC - 64	1		
STATE	DISTRICT	COUNTY		
TEXAS	BWD	SAN SABA		
CONTROL	SECTION	JOB	HWY NO.	
6454	67	001 US0190		
	DATE			
N	08/17/23			

©2023

Project Number: MMC-645467001

County: SAN SABA Control: 6454-67-001

Highway: US0190

GENERAL NOTES

This project is for San Saba County only. Delivery location Site 1 can be anywhere in San Saba County.

The Engineer will specify the number of WORKING DAYS granted for each WORK ORDER based on appropriate production and delivery rates.

The Engineer will notify the Contractor by email no later than 5:00PM the day before to cancel a delivery by the Contractor, along with a revised WORK ORDER reflecting this change.

Each Contract awarded by the Department stands on its own and as such, is separate from other Contracts. A Contractor awarded multiple Contracts, must be capable and sufficiently staffed to concurrently process any or all Contracts at the same time.

Contractor questions on this project are to be addressed to the following individual(s):

Name Email Address

Blake Stembridge, P.E. blake.stembridge@txdot.gov

Questions may be submitted via the Letting Pre-Bid Q&A webpage. This webpage can be accessed from the Notice to Contractors dashboard located at the following address:

https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A webpage.

The Letting Pre-Bid Q&A webpage for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hoover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

SECTION 10.2 - INSTRUCTIONS TO BIDDERS

This project includes plan sheets that are not part of the bid proposal. View or download plans at: https://www.txdot.gov/business/letting-bids/plans-online.html

General Notes Sheet A

Project Number: MMC-645467001

County: SAN SABA Control: 6454-67-001

Highway: US0190

SECTION 10.4 – SCOPE OF WORK

This Contract requires the Contractor to provide Materials in accordance with ITEM 8040 LIMESTONE ROCK ASPHALT (MATERIALS ONLY) by the following method:

1. Delivered by the Contractor to a designated location as defined in each WORK ORDER issued by TxDOT or the assigned representative.

In accordance with Article 10.4.3.1, this contract may be extended twice not to exceed 540 Calendar Days for the entire contract term if mutually agreed.

SECTION 10.8 – PROSECUTION AND PROGRESS

Section 10.8.2, Contract Term will be 6 months (180 Calendar Days). Calendar Days will be charged in accordance with Article 10.8.2.. "Contract Term".

Section 10.8.3., Work Orders issued will specify the following:

- 1. The type and quantity of material to be delivered,
- 2. The Contractor's delivery location(s),
- 3. The number of WORKING DAYS to complete the WORK ORDER,
- 4. The type of haul vehicle the Contractor shall use in the delivery.

The Contractor shall have the capability to deliver material using belly dumps, super dumps/end dumps, or flow boys/live bottoms, as haul vehicles.

Contractor deliveries will typically occur between the hours of 7:00AM and 3:30 PM CST. Prior arrangements shall be made with the Engineer if deliveries or pickups are outside these hours.

Contractor's driver shall report to the Engineer or representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time on the haul ticket, which will include the **WORK ORDER** number.

ITEM 8040 – LIMESTONE ROCK ASPHALT (MATERIALS ONLY)

A minimum delivery will be 4 truckloads.

Transport truck will deliver material with an end dump trailer at locations specified in each **WORK ORDER**.

Delivery of material Monday through Friday during business hours only. Deliveries outside of

Project Number: MMC-645467001

County: SAN SABA Control: 6454-67-001


Highway: US0190

these times may be allowed at the sole discretion of the Maintenance Section Supervisor.

The Plant is the designated aggregate sampling location, unless otherwise approved by the Engineer.

Material deliveries shall be covered by a tarp during transport.

	ESTIMATE SUMMARY					
ITEM- CODE			DESCRIPTION			
ITEM	DESC	SP		l I T	TOTAL EST. FINAL	
NO 8040	CODE 6009	NO 000	LRA (TY I GR AA) (DEL) (ST1)	TON	75.000	TINAL
8040	6107	000	LRA (TY II GR DS) (DEL) (ST1)	TON	2,000.000	
	ESTIMATE & QUANTITY SHEET					
				SHEET NO.		
	23		SAN SABA	MM	C-645467001	5

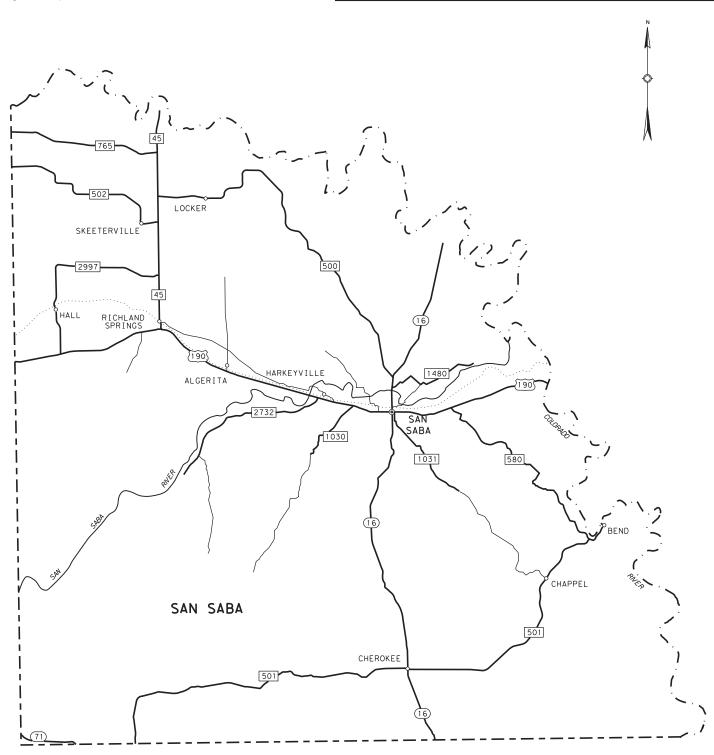

SITE	ITEM	DESCRIPTION		QTY
1	8040-6009	LRA (TY I GR AA)(DEL)(ST1)	TON	75
1	8040-6107	LRA (TY II GR DS)(DEL)(ST1)	TON	2000

*NOTE: SITE 1 DELIVERY LOCATION CAN BE ANYWHERE IN SAN SABA COUNTY.



FED. RD. DIV. NO.	MAINTENANCE PROJECT NO.		SHEET NO.	
6	MA	IC-645467	7001	9
STATE	DIST.	COUNTY		
TEXAS	23	SAN SABA		
CONT.	SECT.	JOB	HIGHWAY NO.	
6454	67	001	US 190	