
DocuSign Envelope ID: 5DD46304-3233-493F-B602-ECB3CB4EBB52

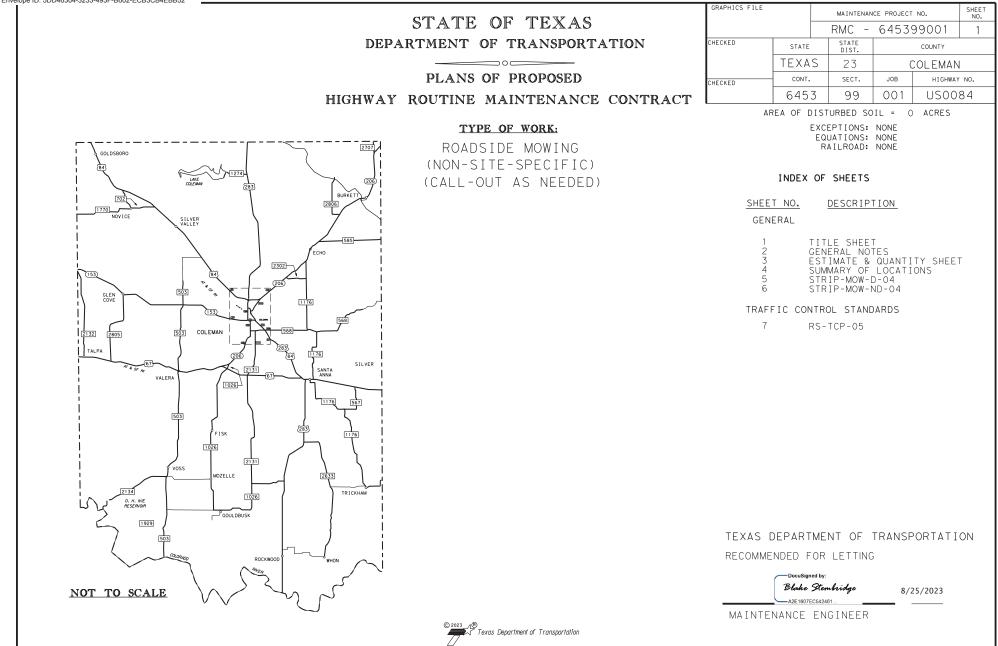

Project Number: RMC - 645399001

County: COLEMAN

Highway: US0084

GENERAL NOTES:

- ITEM 730 will be performed on a CALLOUT BASIS at locations identified by each
  CALLOUT/WORK ORDER.
- This is a CALLOUT CONTRACT. Plan Quantity Measurement does not apply.
- <u>This is a Non-Site-Specific Contract. The LOCATIONS (ROADWAYS) shown on the</u> <u>SUMMARY OF LOCATIONS in the Plans are for Contractor's information only.</u>
- ESTIMATED QUANTITIES shown on the SUMMARY OF LOCATIONS in the Plans are for Contractor's information only.
- QUANTITIES, ROADWAYS and # OF PASSES to be mowed will be identified by each WORK
  ORDER.

## ITEM 2 INSTRUCTIONS TO BIDDERS

Each Contract awarded by the Department stands on its own and as such, is separate from other Contracts. A Contractor awarded multiple Contracts, must be capable and sufficiently staffed to concurrently process any or all Contracts at the same time.

Contractor questions on this project are to be addressed to the following individual(s):

Name

Email Address

Blake Stembridge, P.E. <u>blake.stembridge@txdot.gov</u>

Questions may be submitted via the Letting Pre-Bid Q&A webpage. This webpage can be accessed from the Notice to Contractors dashboard located at the following address:

## https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A webpage.

The Letting Pre-Bid Q&A webpage for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hoover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

General Notes

Sheet A

Control: 6453-99-001

Project Number: RMC – 645399001

County: COLEMAN

Control: 6453-99-001

Highway: US0084

ITEM 7 LEGAL RELATIONS AND RESPONSIBILITIES:

No significant traffic generator events identified.

ITEM 502 BARRICADES, SIGNS AND TRAFFIC HANDLING:

Perform all traffic control according to the Texas Manual on Uniform Traffic Control Devices for Streets and Highways and plan sheet RS-TCP-05.

**ITEM 730 ROADSIDE MOWING** 

Report to the Project Inspector prior to beginning work each day.

Keep equipment MORE THAN 30 ft. from the edge of the pavement or travel lane during non-working hours.

<u>Working Days</u>: The Engineer will calculate and specify the number of working days granted for each WORK ORDER using a production rate of 125 acres each working day.

Set mower cutting height at 7 in. Hand trim to a height of approximately 4 in.

Hand trim around all dead animals or other large debris that can not be mowed over or moved in the same manner as any other fixed object. It is also acceptable to move the object to the right of way line prior to mowing.

## Strip Mowing:

- Mowing width of 15 ft. 1 pass with a 15 ft. mower and is actually measured and paid as 14 ft.
- Mowing width of 30 ft. 2 passes with a 15 ft. mower and is actually measured and paid as 28 ft.
- Mowing width of 45 ft. 3 passes with a 15 ft. mower and is actually measured and paid as 42 ft.
- Trim around signs and driveways beyond the 15 ft., 30 ft. or 45 ft. Strip Mow width.
- Trim around curbs and sidewalks in the city sections.
- All areas not CALLED OUT by WORK ORDER become non-mow areas.
- In reference to plan sheet <u>STRIP-MOW-ND-04</u>, note number 2 is not required unless CALLED OUT by WORK ORDER.

General Notes

Sheet B

## **Estimate Sheet**

ESTIMATE SUMMARY															
						CONTROL 6453-9 US0084 ROADSIDE MOW		A L T				DESCRIPTION	UNIT	TOTAL	
EST	FINAL	EST	FINAL	EST	FINAL	EST	FINAL	Ċ	ITEM CODE	DESC CODE	SP NO			EST	FINAL
						6655.000			730	6001		STRIP MOWING	AC	6655.000	
			l					Н					<u> </u>		
	+		<u> </u>			+		$\vdash$							
						-									
						-									
								Н					+		
						+		Η							
			l					Н							
	+		<u> </u>			+		$\vdash$							
	1		1	1	1	1		Η							
								Н					+		
								$\vdash$			<u> </u>				

ESTIMATE & QUANTITY SHEET

DIST	COUNTY	CCSJ	SHEET
23	COLEMAN	6453-99-001	3
20	COLLINE	0.050.001	

202308141256565

DocuSign Envelope ID: 5DD46304-3233-493F-B602-ECB3CB4EBB52

ITEM 730 will be performed on a **CALLOUT BASIS** at locations identified by each **CALLOUT/WORK ORDER**. This is a **CALLOUT CONTRACT**. Plan Quantity Measurement does not apply. This is a **Non-Site-Specific Contract**. The **LOCATIONS (ROADWAYS)** shown here are for <u>INFORMATION ONLY</u>.

**GENERAL NOTES:** 

•

. . .

QUANTITES, ROADWAYS and # OF PASSES will be identified by each WORK ORDER.


.


ESTIMATED QUANTITES shown here are for INFORMATION ONLY.


SUMMARY OF LOCATIONS

,	GRAPHICS FILE		SHEET NO.					
				RMC	-	64539	99001	4
	CHECKED	STATE	STATI DIST					
		TEXA	23		С			
	CHECKED	CONT.		SEC1	•	JOB	HIGHWAY	NO.
		645	3	99	)	001	)84	
	•							

						STRIP MOWING (1 Pass)			STRIP MOWING (2 Passes)			STRIP MOWING (3 Passes)			
	LIN	REF MARKER		LENGTH	# Of	AC	AC	# OF	AC	AC	# OF	AC	AC		
HWY	FROM	TO	FROM		ТО	MI	Mowings	1 Pass	Total	Mowings	2 Passes	Total	Mowings	3 Passes	Total
US 84	TAYLOR CO LINE	US 67 IN SANTA ANNA	510		544	32.80	0	116.00	0.00	0	222.64	0.00	2	312.12	624.24
US 283	CALLAHAN CO LINE	JCT US 84 IN COLEMAN	336		352	16.00	0	59.00	0.00	0	108.61	0.00	2	156.58	313.16
SH 206	CALLAHAN CO	JCT US 67	324		355	26.60	0	98.00	0.00	0	180.56	0.00	2	268.10	536.20
US 283	US 67 IN SANTA ANNA	MCCULLOCH CO LINE	363		386	21.70	0	80.00	0.00	0	147.30	0.00	2	216.70	433.40
	BROWN CO LINE	RUNNELS CO LINE	586		618	29.40	0	109.00	0.00	0	199.56	0.00	2	288.00	576.00
SH 153	RUNNELS CO LINE	JCT US 84	354		373	19.40	0	65.00	0.00	0	131.68	0.00	2	184.01	368.02
FM 1770	RUNNELS CO LINE	JCT FM 702 IN NOVICE	418		424	5.60	0	20.52	0.00	0	20.52	0.00	2	20.52	41.04
FM 1026	JCT SH 206	JCT US 283	338		364	24.90	0	84.51	0.00	0	145.50	0.00	2	190.44	380.88
FM 1274	JCT US 283	END OF STATE MAINT	432		435	2.40	0	8.15	0.00	0	16.20	0.00	2	24.43	48.86
FM 568	JCT SH 206	END OF PAVEMENT	434	P.	447	12.20	0	41.41	0.00	0	68.50	0.00	2	72.42	144.84
FM 2707	CALLAHAN CO LINE	JCT SH 206	322	P.	324	1.20	0	4.07	0.00	0	4.40	0.00	2	4.40	8.80
FM 1176	JCT SH 206	BROWN CO LINE	334		364	28.00	0	95.03	0.00	0	184.10	0.00	2	225.60	451.20
FM 3425	JCT US 84 BYPASS	JCT SH 206	334		336	1.40	0	4.75	0.00	0	9.50	0.00	2	14.25	28.50
FM 702	JCT US 84	SOUTH JCT US 84	422	P.	427	4.60	0	15.61	0.00	0	31.20	0.00	2	30.38	60.76
FM 2132	JCT US 67	RUNNELS CO LINE	330		339	8.20	0	27.83	0.00	0	55.60	0.00	2	71.94	143.88
FM 2805	JCT US 67	JCT SH 153	332		340	7.50	0	25.45	0.00	0	50.90	0.00	2	73.14	146.28
FM 503	BEGIN STATE MAINT	MCCULLOCH CO LINE	328		356	27.10	0	91.98	0.00	0	180.40	0.00	2	271.14	542.28
FM 2131	FM 568 IN COLEMAN	JCT FM 1026	334		350	15.50	0	52.61	0.00	0	105.20	0.00	2	142.20	284.40
FM 2134	JCT FM 503	END OF STATE MAINT	348	P.	356	6.20	0	21.04	0.00	0	42.00	0.00	2	62.10	124.20
FM 2806	JCT SH 206	END OF STATE MAINT	318	×.	323	4.60	0	15.61	0.00	0	31.20	0.00	2	45.45	90.90
FM 585	JCT SH 206	BROWN CO LINE	324	۳	330	5.80	0	19.68	0.00	0	39.30	0.00	2	59.05	118.10
FM 2633	JCT US 283	END OF PAVEMENT	346	F	360	13.50	0	45.82	0.00	0	89.80	0.00	2	130.50	261.00
FM 1929	CONCHO CO LINE	JCT FM 503	425		431	7.50	0	25.45	0.00	0	50.90	0.00	2	70.24	140.48
FM 567	JCT US 67	JCT FM 1176	342	P.	345	3.40	0	11.54	0.00	0	23.10	0.00	2	27.40	54.80
FM 2302	JCT FM 1176	JCT SH 206	328	P.	331	2.00	0	6.79	0.00	0	13.50	0.00	2	18.13	36.26
RR 9	JCT FM 2134	END OF STATE MAINT	350		351	1.20	0	4.07	0.00	0	9.60	0.00	2	10.85	21.70
TOTAL						328.70		1,148.92	0.00		2,161.77	0.00		2,990.09	5,980.18
ADDITIONAL STRIP MOWING AT UNDETERMINED LOCATI					- ROAD	WAYS & MOV	VING WIDT	H WILL BE C	DUTLINED	BYWOR	ORDER			675.00	ACRES
SUMMAR	γ.					AC									
STRIP MOWING (1 PASS) 0															
	DWING (2 PASSES)	0													
	DWING (3 PASSES)				5,980										
STRIP MC				675											
TOTAL						6,655									

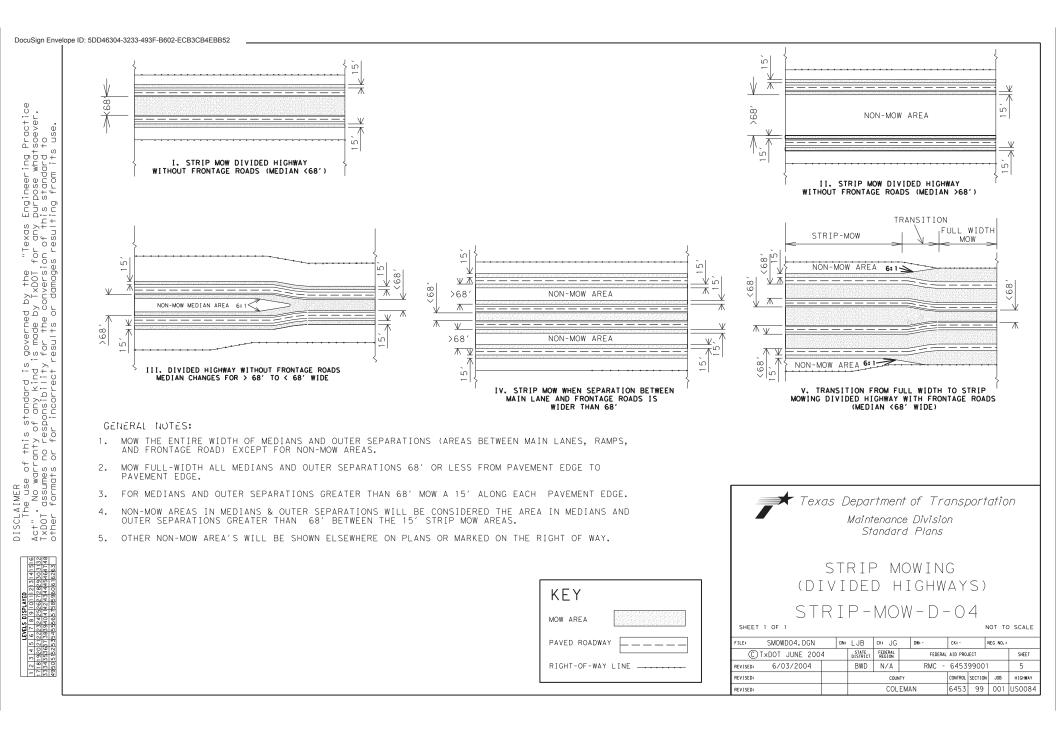

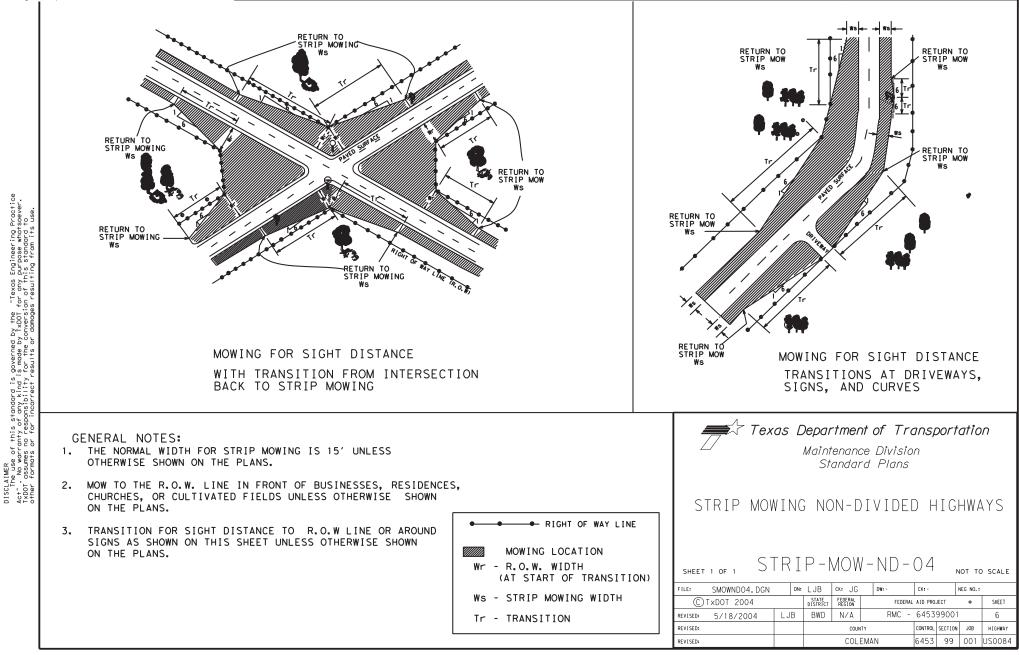

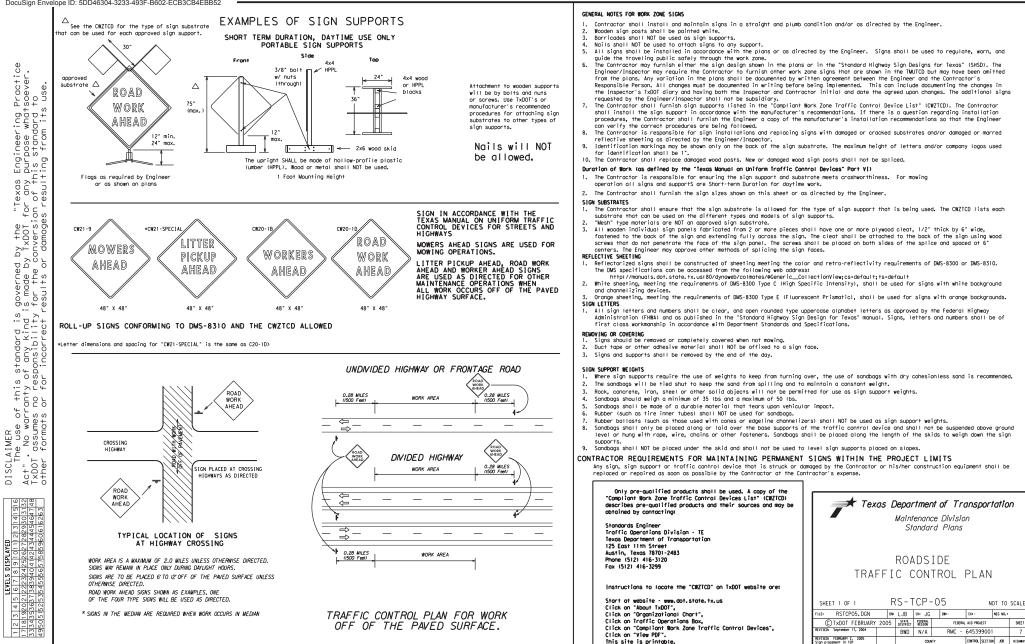

DocuSign Envelope ID: 5DD46304-3233-493F-B602-ECB3CB4EBB52

This site is printable

COLEMA

6453 99 001 US0084