27

31

INDEX OF SHEETS

SHEET	
NO.	DESCRIPTION
1	TITLE SHEET
2	ESTIMATE & QUANTITY SHEET
3A-3I	GENERAL NOTES
4	PROJECT LIMITS
5	SUMMARY SHEET
6-7	TRB-15(1)(DAL) AND TRB-15(2)
8	RSTCP-05
9-20	BC(1)-21 THRU BC(12)-21
21	WZ(RS)-22
22-24	TCP(1-3)-18 THRU TCP(1-5)-18


25-26 TCP(2-1)-18 THRU TCP(2-2)-18

28-30 TCP(2-4)-18 THRU TCP(2-6)-18

32-36 TCP(6-1)-12 THRU TCP(6-5)-12 37-38 TCP(6-8)-14 THRU TCP(6-9)-14

TCP(2-3)-23

TCP(5-1)-18



THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.



10/23/2023

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED HIGHWAY ROUTINE MAINTENANCE CONTRACT

GRAPHICS FILE			MAINTENAN	CE PROJECT	SHEET NO.	
DN		RMC-645025001				
CHECKED	STATE	STATE		COUNTY		
DN	TEXA	TEXAS			DALLAS	
CHECKED	CONT.		SECT.	JOB	HIGHWAY	NO.
NP	6450)	25	001	IHOC	30


TYPE OF WORK:

TREE TRIMMING AND BRUSH REMOVAL

PROJECT NO.: RMC-645025001

IH0030 HIGHWAY :

LIMITS: VARIOUS ROADWAYS IN THE WEST DALLAS COUNTY MAINTENANCE SECTIONS

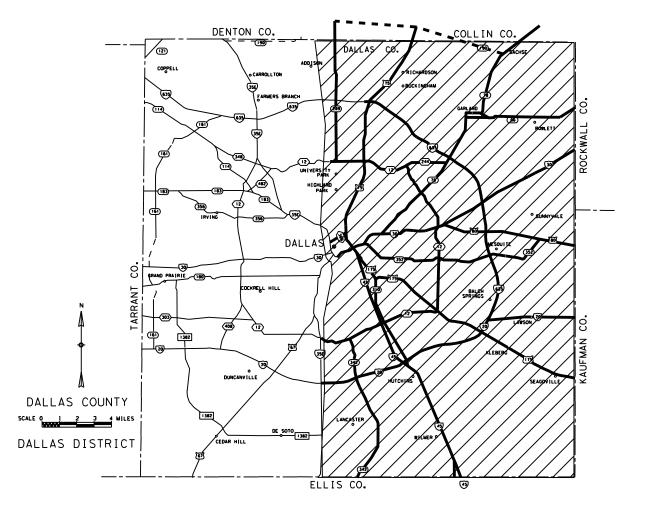



Texas Department of Transportation

RECOMMENDED FOR LETTING

10/30/2023

AREA ENGINEER

RECOMMENDED FOR LETTING


-DocuSigned by:

David Morren, P.E.

10/30/2023

DISTRICT MAINTENANCE ENGINEER

RECOMMENDED FOR LETTING



10/30/2023

(C) by Texas Department of Transportation 2023 : all rights reserved



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6450-25-001

DISTRICT Dallas HIGHWAY IH0030

COUNTY Dallas

	CONTROL SECTION JOB			6450-2	5-001		
		PROJE	CT ID	A0020	A00201203		
		co	UNTY	Dall	las	TOTAL EST.	TOTAL FINAL
		HIG	HWAY	ІНОС)30		
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	МО	8.000		8.000	
	752-6002	BRUSH REMOVAL	MI	16.640		16.640	
	752-6004	TREE TRIMMING / BRUSH REMOVAL(CHANNELS)	AC	16.000		16.000	
	752-6005	TREE REMOVAL (4" - 12" DIA)	EA	757.000		757.000	
	752-6006	TREE REMOVAL (12" - 18" DIA)	EA	157.000		157.000	
	752-6007	TREE REMOVAL (18" - 24" DIA)	EA	31.000		31.000	
	752-6008	TREE REMOVAL (24" - 30" DIA)	EA	3.000		3.000	
	6185-6002	TMA (STATIONARY)	DAY	32.000		32.000	



DISTRICT	COUNTY	CCSJ	SHEET
Dallas	Dallas	6450-25-001	2

DocuSign Envelope ID: 3A4E75C7-7BC0-498F-8154-A739AE5C2E65

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

GENERAL NOTES:

General:

This project consists of performing "Tree Trimming and Brush Removal" on various roadways in the West Dallas County Maintenance Section.

Sequence of work will be approved.

The Department reserves the right to revise schedule as it deems necessary.

Provide and maintain a dedicated email address for receipt of work orders and correspondence throughout the term of this contract. Acknowledgement of emailed work order/callouts is required no more than 12 hr. from notification.

Contractor's attention is called to the fact that all adjoining pavement sections will be protected during all phases of construction and any damages incurred due to Contractor's operation will be repaired and replaced at the Contractor's expense.

Each contract awarded by the Department stands on its own as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Coordinate work through:

Terry Blocker 4777 E. Hwy 80 Mesquite, Texas 75150 214-320-6234

Contractor questions on this project are to be addressed to the following individuals:

Nathan Petter Nathan.Petter@txdot.gov
Terry Blocker Terry.Blocker@txdot.gov

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

General Notes Sheet 3A

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

Attention is directed to the possible presence of underground utilities owned by the Texas Department of Transportation (irrigation, signal, illumination and surveillance, communication, and control) on the right of way. Call the Department for locates at 214-320-6682 and 214-320-6205 48 hr. in advance of excavation. Contact the appropriate department of the local city or town a minimum of 48 hr. in advance of excavation.

If overhead or underground power lines need to be de-energized, contract the electrical service provider to perform this work. Cost associated with de-energizing the power lines or other protective measures required are at no expense to the Department.

If working near power lines, comply with the appropriate sections of Texas State Law and Federal Regulations relating to the type of work involved.

<u>Item 2 – Instructions to Bidders:</u>

This project includes plan sheets that are not part of the bid proposal.

Order plans from any Reproduction Company listed at:

http://www.dot.state.tx.us/business/contractors consultants/repro companies.htm

View or download plans at:

http://www.dot.state.tx.us/business/plansonline/plansonline.htm

Item 3 – Award and Execution of Contract:

This contract is Site Specific.

After written notification, work will be continuously prosecuted to completion.

The work order letter will include all roadways contained on the Summary Sheet.

Notification to perform "Non-Site Specific" work at locations not presented on the Summary Sheet will be in writing.

"Non-Site Specific" minimum per notification will be \$1000.

General Notes Sheet 3B

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

Item 7 – Legal Relations and Responsibilities:

Pre-construction safety meeting will be conducted with Contractor's personnel prior to work beginning on a continuously prosecuted contract or before each callout work request.

Attendance of this meeting will not be paid directly but considered subsidiary to the various bid items.

Do not obtain law enforcement personnel without requesting in writing 48 hr. prior to need and the Engineer's written approval. The Department may compensate the Contractor for providing full time, off-duty, uniformed, law enforcement personnel, and patrol car. The law enforcement personnel may be required for assistance with traffic control for lane or ramp closures or other situations that dictate the need for law enforcement officers as directed. Off-duty law enforcement personnel will have transportation jurisdiction and full police powers. Law enforcement personnel will show proof of certification by the Texas Commission on Law Enforcement (TCOLE). This will be paid under "Force Account – Law Enforcement Personnel". TxDOT Form 318 will be utilized.

Patrol vehicles must be clearly marked to correspond with the officer's agency and equipped with appropriate lights to identify them as law enforcement. For patrol vehicles not owned by a law enforcement agency, markings will be retroreflective and legible from 100 ft. from both sides and the rear of the vehicle. Lights will be high intensity and visible from all angles.

Holiday restrictions – the Engineer may decide that no lane closures or construction operations will be allowed during the restricted periods listed in the following holiday schedule. TxDOT has the right to lengthen, shorten, or otherwise modify these restricted periods as actual, or expected, traffic conditions may warrant. Working days will not be charged for these restricted periods. No additional compensation will be allowed for these restricted closures (i.e., overhead, delays, stand-by, barricades or any other associated cost impacts).

- New Year's Eve and Day (noon on December 31 thru 10 P.M. January 1)
- Easter Holiday weekend (noon on Friday thru 10 P.M. Sunday)
- Memorial Day weekend (noon on Friday thru 10 P.M. Monday)
- Independence Day (noon on July 3 thru 10 P.M. on July 5)
- Labor Day weekend (noon on Friday thru 10 P.M. Monday)
- Thanksgiving Holiday (noon on Wednesday thru 10 P.M. Sunday)
- Christmas Holiday (noon on December 23 thru 10 P.M. December 26)

Holiday restrictions for Independence Day, Thanksgiving Holiday, and the Christmas Holiday may be extended for the "week of" due to the nature of work being performed and the work location at the discretion of the Engineer for safety of the traveling public.

Roadway closures during the following key dates and/or special events are prohibited.

General Notes Sheet 3C

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

Event Restrictions – No Lane Closures that restricts or interferes with traffic will be allowed for the regional events set forth below. This affects IH30, IH30 HOV, IH35E, and IH35E HOV. TxDOT has the right to lengthen, shorten, or otherwise modify these restrictions as actual traffic conditions may warrant. TxDOT also has the right to modify the list of major events as they are added, renamed, rescheduled, or as warranted.

- State Fair of Texas (no lane closures after 6 A.M. on Fridays through 9 P.M. on Sundays; no full closures for any direction of any facility from opening day through the closing day).
- The University of Texas vs. University of Oklahoma football game (no lane closures beginning 4 hr. prior to the event and ending 3 hr. following event completion).
- The First Responder Bowl (no lane closures beginning 3 hr. prior to the event and ending 2 hr. following the event completion).
- Dallas Mavericks Home Games (no lane closure beginning 2 hr. prior to the event and ending ½ hr. following event commencement with no full lane closures considered until 2 hr. following event completion).
- Dallas Stars Home Games (no lane closure beginning 2 hr. prior to the event and ending ½ hr. following event commencement with no full lane closures considered until 2 hr. following event completion).
- Texas Rangers Home Games (no lane closure beginning 2 hr. prior to the event and ending ½ hr. following event commencement with no full lane closures considered until 2 hr. following event completion).
- Dallas Cowboys Home Games (no lane closure beginning 2 hr. prior to the event and ending ½ hr. following event commencement with no full lane closures considered until 2 hr. following event completion).
- Major Events at the American Airline Center, Globe Life Park in Arlington, AT&T Stadium with expected attendance exceeding 15,000 (no lane closures beginning 2 hr. prior to event and ending ½ hr. following event commencement with no full closures considered until 2 hr. following event completion).
- Major Downtown Dallas Events (restrictions will be considered on a case-by-case basis).
 This category could include, but is not limited to, parades for sports championships, major political events, major Art District Events, and large athletic events such as marathons.

<u>Item 8 – Prosecution and Progress:</u>

Working days will be charged in accordance with Section 8.3.1.4, "Standard Workweek".

Liquidated damages will be charged for each working day exceeding the time allowed in the work order letter.

General Notes Sheet 3D

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

The Lane Closure Assessment Fee is shown on the following table. The fee applies to the Contractor for closures or obstructions that overlap into restricted hour traffic for each hour or portion thereof, regardless of the duration of the lane closure or obstruction.

Table 1
Lane Closure Assessment Fee Table

Closure Assessment Fe					
	Amount				
Roadway	Per Lane				
	Per Hour				
IH 20	\$4,000				
IH 30	\$3,500				
IH 35E	\$4,500				
IH 635	\$3,000				
US 67	\$2,000				
SH 114	\$2,000				
SH 161	\$2,500				
SH 180	\$300				
SH 183	\$3,500				
SH 190	\$1,000				
SH 356	\$500				
SS 303	\$200				
SS 348	\$500				
SS 408	\$2,000				
SS 482	\$1,000				
SL 12	\$1,500				
SL 354	\$500				
FM 1382	\$500				

Contractor will submit a bar chart or CPM chart for progress of schedule. Present work to begin no later than 7 calendar days from the work order letter unless otherwise approved.

Perform work during the shaded months presented in the "Schedule of Work" Table.

TABLE 2 SCHEDULE OF WORK

	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
Site Specific												
Work												
Non-Site												
Specific Work												

General Notes Sheet 3E

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

Do not prune between the dates presented under the Item 752 Tree & Brush Removal standard specification. Tree removal may still be performed during these dates. Submit project Schedule that shows no tree trimming will occur during the restricted dates specified under Item 752.

Item 9 – Measurement and Payment:

Payment for police officer hours under force account method will not exceed the duration of the lane closure. Time will begin when set up operations commence and end when the closure is removed.

<u>Item 500 – Mobilization:</u>

Mobilization is lump sum.

<u>Item 502 – Barricades, Signs, and Traffic Handling:</u>

Provide traffic control in compliance with the latest edition of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD), the "Traffic Control Standard Sheets" (TCSS), and as directed.

Perform work Monday through Friday during daylight hours. Do not begin work until 30 minutes after sunrise and cease operations 30 minutes before sunset.

If closing a lane is necessary, closure times will be Monday through Friday, 9 A.M. to 3:30 P.M. Close no more than one lane at a time, unless otherwise approved. Provide proposed lane closure information to the Engineer by 1 P.M. on the day prior to the proposed closures. Furnish information for Monday closures or closures following a national or state holiday on the last office workday prior to the closures. Do not close lanes if the above reporting requirements have not been met.

Nighttime and weekend work will be allowed with prior approval, except for emergency work.

Maximum length of lane closure will be 2 miles.

Traffic Control Plans with a lane closure causing backups of 20 minutes or greater in duration will be modified by the Engineer.

Erect barricades and signs in locations not obstructing the traveling public's view of the normal roadway signing or necessary sight distance.

Provide sufficient and qualified staff and equipment to revise the traffic control as directed.

General Notes Sheet 3F

DocuSign Envelope ID: 3A4E75C7-7BC0-498F-8154-A739AE5C2E65

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

Trailer all slow moving vehicles (designed to operate 25 mph or less) crossing freeway main lanes.

When moving unlicensed equipment on or across any pavement or public highways, protect the pavement from all damage using an acceptable method.

Equipment and materials will not be left within 30 ft. of the travel lane during non-working hours

The work performed, materials furnished and all labor, tools, and equipment necessary to complete the work for Non-Site Specific locations under this Item will not be measured or paid for directly but will be considered subsidiary to the various bid items of this contract.

The "Force Account – Safety Contingency" has been established for this project and is intended to be utilized for work zone enhancements to improve the effectiveness of the Traffic Control Plan that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Item 752 – Tree and Brush Removal:

Pruning of trees between February 15th and June 15th shall be restricted, as directed under the Item 752 Tree & Brush Removal standard specification, to limit insect & fungal infestation of trees. The complete removal of a tree will be allowed during this time frame, but removal must be completed as directed under the Item 752 Tree & Brush Removal and follow all requirements of the standard specification. No pruning nor limb damage shall occur to surrounding Oak trees in the area, during the tree removal process, in order to limit the spread of Oak Wilt.

Trees located in front of a residence or a business will be pruned or trimmed as directed.

Tree Removal – Cut all trees as close to the ground as possible but no higher than 3 in. above the ground level until the stump can be removed according to the plans. Department will mark the trees to be removed with fluorescent orange paint.

Do not use a telescopic side boom rotary mower.

Brush Removal – Remove all brush at culverts, headwalls, wingwalls, guardrail, cable barrier, riprap and as directed. Trees less than 4 in. diameter are considered brush and are to be removed. Saplings and brush will not be marked with florescent orange paint.

General Notes Sheet 3G

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

Remove and dispose of or mulch all dead fall (trees and/or limbs already fallen to the ground) from within the limits of the right of way. This will not be paid for directly but will be considered subsidiary to this item.

Operate equipment (chipper and/or screen) to ensure at least 90% of wood chips left on the right of way are smaller than 2 in. in size (length and width). Keep cutter bar and blades sharp to ensure limbs are not shredded.

Prune all trees at the right of way line to a minimum 18 ft. vertical face measured from the adjacent natural ground. If limbs encroach pavement after pruning, prune as directed.

All stumps will be removed before proceeding to a new location.

Do not use any chemical agents to aid in the deterioration or removal of the stump.

Trees blocking signs will be trimmed as directed.

Burning of brush will not be permitted. Cleanup will be continuously and concurrently with pruning, trimming, and removal operations.

Unless otherwise approved, all trees, limbs, and brush that are cut in 1 day will be picked up and moved off the right of way the same day.

All driveways, walkways, paths, right of way, and roadways will be left clean at the end of each workday.

For channel work, no heavy equipment will be allowed below the ordinary high water mark. Only hand clearing will be allowed for brush removal or as directed.

Item 6185 – Truck Mounted Attenuator (TMA) and Trailer Attenuator (TA):

The total number of truck mounted attenuators (TMA) required when utilizing the traffic control standards are shown in the tables below.

TCP 1 Series	Scenario		Required TMA/TA		
(1-3)-18	Α	В	1	2	
(1-4)-18 / (1-5)-18			1	1	

TCP 2 Series	Scei	nario	Required TMA/TA	
(2-1)-18 / (2-2)-18 / (2-4)-18 / (2-5)-18 / (2-6)-18	Δ	All .	,	1
(2-3)-23	Α	В	1	2

General Notes Sheet 3H

DocuSign Envelope ID: 3A4E75C7-7BC0-498F-8154-A739AE5C2E65

Project Number: RMC-645025001 **Control:** 6450-25-001

County: Dallas Highway: IH0030

TCP 5 Series	Scenario		Required TMA/TA
(5-1)-18	Α	В	1


TCP 6 Series	Scenario		Requ TMA	
(6-1)-12	Α	В	1	2
(6-2)-12 / (6-3)-12	Д	All .	1	
(6-4)-12	Α	В	1	2
(6-5)-12	Α	В	1	2
(6-8)-14 / (6-9)-14	All		1	

Shadow vehicles equipped for truck mounted attenuators (TMA) for mobile and stationary operations must be available for use at any time as determined by the Engineer.

The Contractor will be responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMA needed for the project for those times per plan requirements. Additional TMAs used that are not specified in the plans in which the Contractor expects compensation will require prior approval from the Engineer.

When TMA's are paid by the hour or day, "ready for operation" is defined as all equipment, material, personnel, etc. are present on the project ready to begin work.

General Notes Sheet 3I

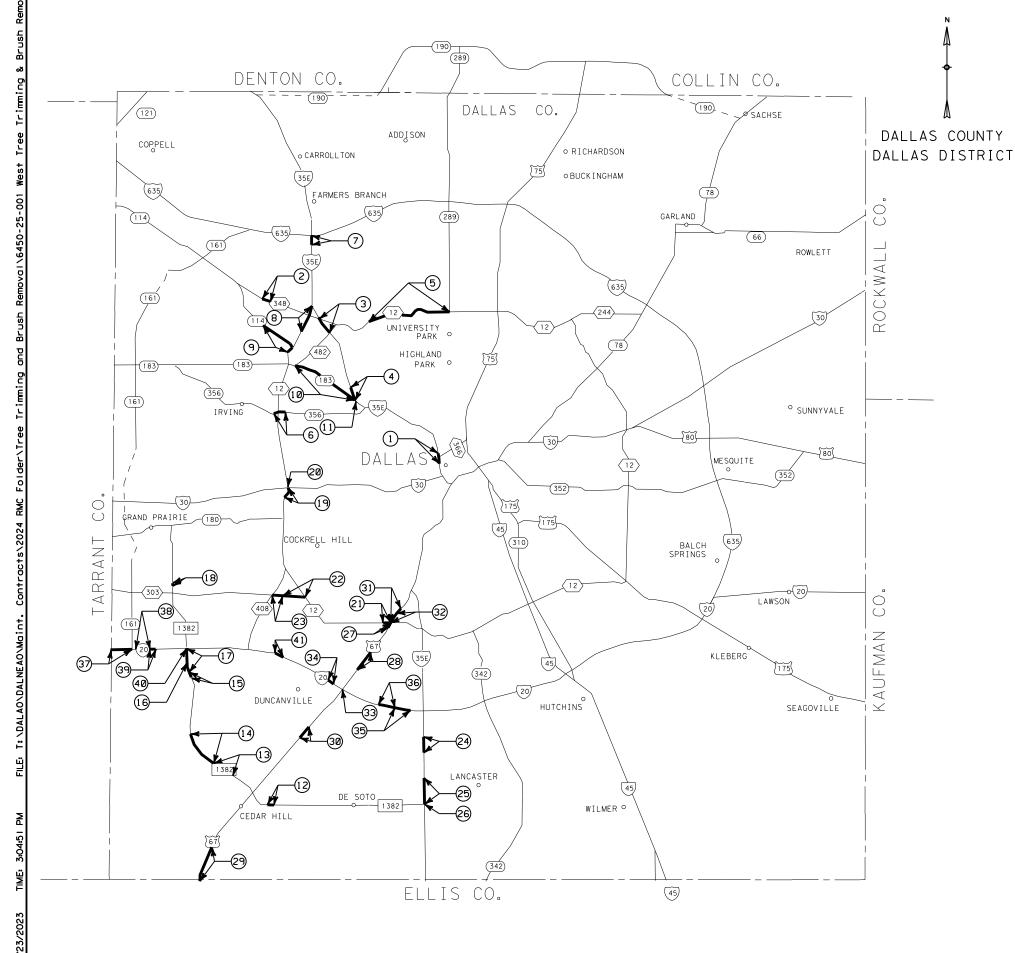

REF. NO.	ROADWAY	LIMITS
	NORTHWEST MAINTENANCE SECTION	
1	IH 35E	REUNION TO CONTINENTAL AVE
2	SS 348	RIVERSIDE DR TO LUNA RD
3	IH 35E	NORTHWEST HIGHWAY TO SS 482
4	IH 35E	REGAL ROW TO MOCKINGBIRD
5	SL 12	MARSH LN TO NORTH DALLAS TOLLWAY
6	SH 356	S WILDWOOD DR TO E 6TH ST
7	IH 35E	IH 635 TO ROYAL LN
8	SL 12	IH 35 SPLIT TO ELM FORK TRINITY RIV
9	Sh 114	TEXAS PLAZA TO ROCHELLE
10	SH 183	MOCKINGBIRD LN TO SS 482
1 1	SH 183	AT PETERS RD
	SOUTHWEST MAINTENANCE SECTION	
12	FM1382	WATERFORD OAKS TO DUNCANVILLE RD.
13	FM1382	NEW CLARK RD TO NORTHWOOD UNIV.
1 4	FM1382	NORTHWOOD TO PENN BRANCH
15	FM1382	MARITIME WAY TO CAMP WISDOM
16	FM1382	MOUNTAIN CREEK
17	FM1382	CAMP WISDOM TO IH20 NB/SB
18	FM1382	CREEK BETWEEN DOMINGO & CANDLESTICK
19	SL12	TOWNVIEW TO IH30
20	SL12	SB @ IH30
21	SL12	RUGGED DR. TO US67 EB/WB
22	SS3Ø3	SL12 TO LEDBETTER DR
23	SS3Ø3	SS 408 TO LEDBETTER
24	IH35	SBFR WINTERGREEN TO THE MEADOWS PKW
25	IH35	SBFR BETWEEN PLEASANT RUN TO BELTLINE
26	IH35	AT TEN MILE/ BELTLINE
27	US67	SB LEDBETTER TO SWANSEE
28	US67	REDBIRD TO CAMP WISDOM SB/NB
29	US67	MT. LEBANON TO ELLIS COUNTY LINE
30	US67	JOE WILSON TO WINTERGREEN
31	US67	LEDBETTER TO POLK
32	US67	PENTAGON TO LEDBETTER SB
33	US67	AT WEST VIRGINA RD
34	IH20	ORIELE TO CAMP WISDOM
35	IH20	EB POLK TO WINTERSET
36	IH2Ø	WB POLK TO HAMPTON
37	IH2Ø	SH161 TO TARRANT COUNTY LINE
38	IH2Ø	EB CARRIER TO DECHMAN
39	IH2Ø	EB WESTCLIFF TO BELTLINE
40	IH2Ø	AT BELTLINE
41	IH20	EB CEDAR RIDGE TO HILL CITY



PROJECT LIMITS

DESIGN DN	FED.RD. DIV.NO.	MAI	MAINTENANCE PROJECT				
GRAPHICS	6	RM	IH0030				
DN	STATE	DISTRICT	COUNTY	SHEET NO.			
CHECK NP	TEXAS	DALLAS	DALLAS				
CHECK	CONTROL	SECTION	JOB	4			
DN	6450	25	001				

₹		
126:42		
_ ≌		
- •		
Νi		


	RY OF ROADWAY ITEMS				750	750	750	750	750	750	
REF NO	LOCATION				752 6002	752 6004	752 6005	752 6006	752 6007	752 6008	<u> </u>
		PHYSICAL LIMITS	TEXAS REFERENCE MARKERS	ADT	BRUSH REMOVAL	TREE TRIMMING / BRUSH REMOVAL(CHANNELS)	TREE REMOVAL (4" -	TREE REMOVAL (12" - 18" DIA)	TREE REMOVAL (18" - 24" DIA)	TREE REMOVAL (24" - 30" DIA)	*DAYS ALLOWED TO COMPLETE
					MI	AC	EA	EA	EA	EA	DAYS
1	NORTHWEST MAINTENANCE SECTION										
1	IH 35E	REUNION TO CONTINENTAL AVE	428-429	198355	Ø. 626		20	3			4
2	SS 348	RIVERSIDE DR TO LUNA RD	577-578	19294		2	75	50	2	3	14
3	IH 35E	NORTHWEST HIGHWAY TO SS 482	436-437	121391	0.741	1	75	4			9
4	IH 35E	REGAL ROW TO MOCKINGBIRD	434-438	123230							Ø
5	SL 12	MARSH LN TO NORTH DALLAS TOLLWAY	604-606	3Ø746	2. 668	2	15				5
6	SH 356	S WILDWOOD DR TO E 6TH ST	58Ø	17425		1	15				3
7	IH 35E	IH 635 TO ROYAL LN	440-439	238774	Ø. 837	1	20	2			4
8	SL 12	IH 35 SPLIT TO ELM FORK TRINITY RIVE	602-600	117013	1.212		17	5			4
9	Sh 114	TEXAS PLAZA TO ROCHELLE	624-622	89870	1.787	1	10	2			3
10	SH 183	MOCKINGBIRD LN TO SS 482	592-594	135330	2. 58	2	25				5
1 1	SH 183	AT PETERS RD	592-594	20432	Ø. 132	2	10	5	5		4
:	SOUTHWEST MAINTENANCE SECTION										
12	FM1382	WATERFORD OAKS TO DUNCANVILLE RD.	28Ø	32, 255	Ø. 716						1
13	FM1382	NEW CLARK RD TO NORTHWOOD UNIV.	278-276	26, 542	Ø. 626						1
14	FM1382	NORTHWOOD TO PENN BRANCH	276	19,604			5				1
15	FM1382	MARITIME WAY TO CAMP WISDOM	274	26, 296			10	2			2
16	FM1382	MOUNTAIN CREEK	272-274	27,684			15				2
17	FM1382	CAMP WISDOM TO IH20 NB/SB	272-274								Ø
18	FM1382	CREEK BETWEEN DOMINGO & CANDLESTICK	27Ø	25, 895		1	5		1		2
19	SL12	TOWNVIEW TO IH30	594	150, 095			5				1
20	SL12	SB @ IH30	594	150,095		1	5				2
21	SL12	RUGGED DR. TO US67 EB/WB	586	21,519			25	5			3
22	SS3Ø3	SL12 TO LEDBETTER DR	578	8, 248			5				1
23	SS3Ø3	SS 408 TO LEDBETTER	578	8, 248	Ø. 417						1
24	IH35	SBFR WINTERGREEN TO THE MEADOWS PKWY	416-417	24,714			60	5	10		8
25	IH35	SBFR BETWEEN PLEASANT RUN TO BELTLINE	415-414	24,714			15	5			2
26	IH35	AT TEN MILE/ BELTLINE	414	6, 899		2	15	5			3
27	US67	SB LEDBETTER TO SWANSEE	4Ø8	85, 929	Ø.527		10				2
28	US67	REDBIRD TO CAMP WISDOM SB/NB	410	91,358	Ø. 778		20	20	5		6
29	US67	MT. LEBANON TO ELLIS COUNTY LINE	420	46, 122							0
30	US67	JOE WILSON TO WINTERGREEN	414-416	48, 889	0.855		50	3			7
31	US67	LEDBETTER TO POLK	408	77, 799							0
32	US67	PENTAGON TO LEDBETTER SB	408	77, 799			30	10	3		5
33	US67	AT WEST VIRGINA RD	412	7, Ø93			10	3			2
34	IH2Ø	ORIELE TO CAMP WISDOM	462-463	161,309			10				1
35	IH2Ø	EB POLK TO WINTERSET	466-467	2,460	Ø.527		20				3
36	IH2Ø	WB POLK TO HAMPTON	465-466	1,380			40	10			5
37	IH2Ø	SH161 TO TARRANT COUNTY LINE	455-454	189, 444							Ø
38	IH2Ø	EB CARRIER TO DECHMAN	456-457	10,139	0.508		30				4
39	IH2Ø	EB WESTCLIFF TO BELTLINE	457	10,139	0.509		50	5			7
40	IH2Ø	AT BELTLINE	457	177, 383				3			1
41	IH20	EB CEDAR RIDGE TO HILL CITY	461	166, 611	0.594		40	10	5		7
	PROJECT TOTALS				16. 64	16	757	157	31	3	135





SUMMARY SHEET


DESIGN DN	FED.RD. DIV.NO.	MAII	HIGHWAY NO.	
GRAPHICS	6	RM	IH0030	
DN	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK NP	TEXAS	DALLAS	DALLAS	_
CHECK	CONTROL	SECTION	JOB	5
DN	6450	25	001	

* TOTAL WORKING DAYS PER REFERENCE NO. (SITE LOCATION) TO COMPLETE THE WORK.

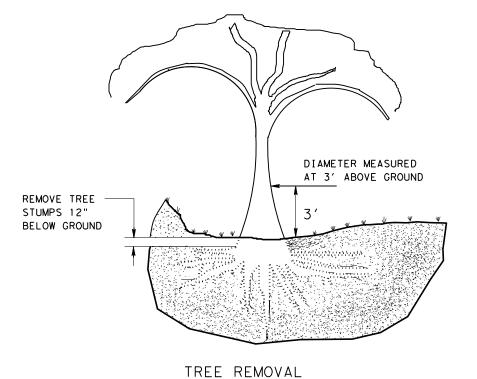



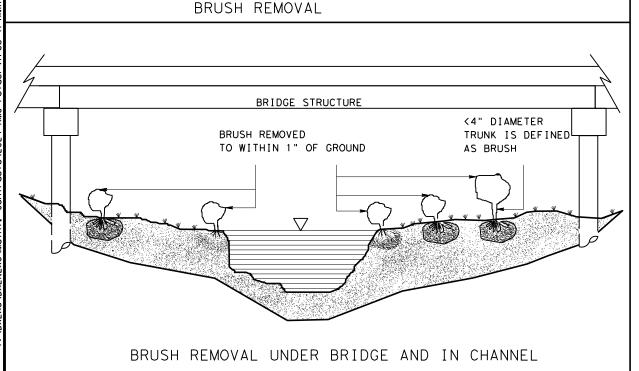

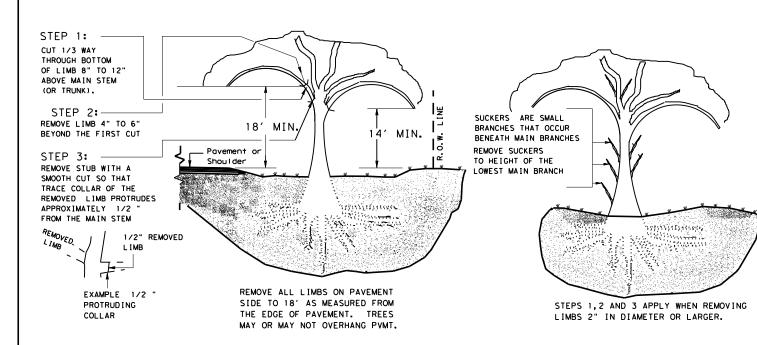

GENERAL NOTES:

TREE TRIMMING

- 1. TRIM AND REMOVE ALL TREE LIMBS ON THE PAVEMENT SIDE OF THE TRUNK 18' ABOVE THE PAVEMENT OR BRIDGE DECK ELEVATION, OVER HANGING THE ROADWAY OR NOT, UNLESS OTHERWISE SHOWN ON THE PLANS.
- 2. TRIM AND REMOVE ALL TREE LIMBS BETWEEN THE TRUNK AND R.O.W. LINE 14' ABOVE NATURAL GROUND, TERRAIN OR OTHER STRUCTURE ELEVATION, UNLESS OTHERWISE SHOWN ON THE PLANS.

TREE REMOVAL

- 3. FOR TREES MARKED FOR REMOVAL, THE DIAMETER OF TREES ARE DETERMINED BY MEASUREMENT OF THE TRUNK CIRCUMFERENCE 3' ABOVE THE GROUND. TREES WITH TRUNKS OF LESS THAN 4" DIAMETER ARE CONSIDERED TO BE BRUSH. TREES WITH MULTIPLE TRUNKS AT THE POINT OF MEASUREMENT ARE MEASURED AND PAID FOR SEPARATELY.
- 4. MEASUREMENTS FOR PAYMENT ARE PRESENTED IN TABLE 1: RANGE FOR PAY ITEMS.

TREE TRIMMING

	TABLE 1								
TF	REE TRUNK SIZ	E FOR TREE R	EMOVAL PAYME	NT					
		RANGE FO	R PAY ITEMS						
	TRUNK [DIAMETER *	TRUNK CIRC	CUMFERENCE					
	LOWER LIMIT	UPPER LIMIT	LOWER LIMIT	UPPER LIMIT					
	IS GREATER	IS LESS THAN		IS LESS THAI					
PAY ITEM	THAN	OR EQUAL TO	THAN	OR EQUAL TO					
752 6005	4	12	12 1/2	37 1/2					
752 6006	12	18	37 1/2	56 1/2					
752 6007	18	24	56 1/2	75 1/2					
752 6008	24	30	75 1/2	94					
752 6009	30	36	94	113					
752 6010	36	42	113	132					
752 6011	42	48	132	151					
752 6012	48	60	151	188 1/2					
752 6013	60	72	188 1/2	226					
752 6019	72	84	226	264					
		GREATER		NOT					
	84	THAN 84	264	APPLICABLE					

*SEE GENERAL NOTE #3.



PAVEMENT SIDE

18' MIN.

R. 0. ₩.

AT R.O.W.

TREE LOCATION MAY VARY WITH R.O.W. LINE

Trenty districtions.

REMOVE ALL LIMBS ON PAVEMENT

SIDE TO 18' ABOVE SURROUNDING


NATURAL GROUND WHEN TREE IS


TREE AND BRUSH REMOVAL

TRB-15(1)(DAL)

FILE:	DN: JEO		CK: LJB	DW: JEO	CK:
© TxDOT MARCH 2017	CONT	SECT	JOB		HIGHWAY
REVISIONS	6450	25	001		I H0030
evised to clarify work at the R.O.W. and General Note 1.	DIST		COUNTY		SHEET NO.
	18		DALLA	S	6

this standard is governed by the "Texas Engineering Practice anty of any kind is made by TxDOT for any purpose whatsoever. no responsibility for the conversion of this standard to or for incorrect results or damages resulting from its use. DISCLAIMER
The use of
Act". No warra
TXDOT assumes n
other formats o



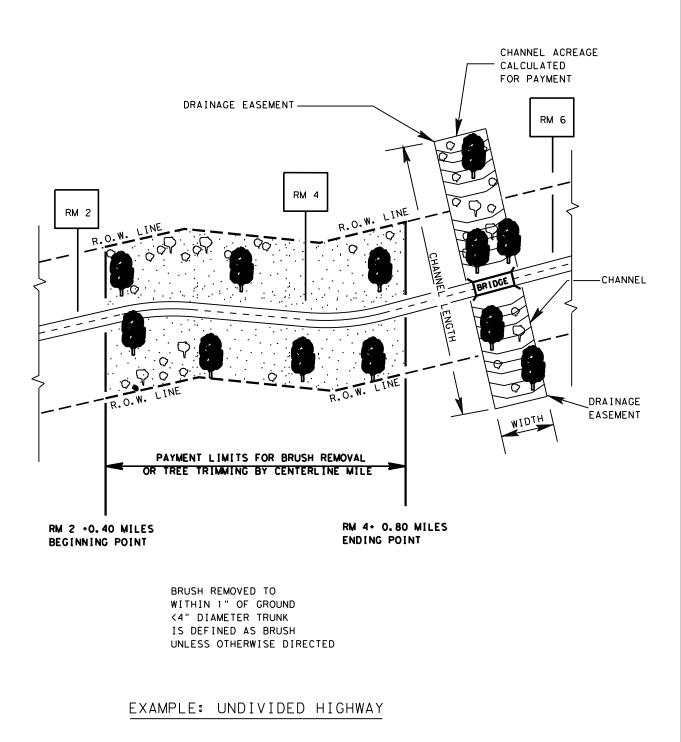

CHANNEL ACREAGE RM 120 CALCULATED FOR PAYMENT RM 116 DRAINAGE EASEMENT CHANNEL FRONTAGE ROAD-BRIDGE Q BRIDGE MEDIAN FRONTAGE ROAD -٥ ۵ RM 11 \Diamond **EASEMENT** PAYMENT LIMITS FOR BRUSH REMOVAL OR TREE TRIMMING BY THE CENTERLINE MILE BRUSH REMOVED TO RM 116 + 0.40 MILES RM 118 + 1.50 MILES WITHIN 1" OF GROUND BEGINNING POINT ENDING POINT <4" DIAMETER TRUNK IS DEFINED AS BRUSH

UNLESS OTHERWISE DIRECTED

EXAMPLE: DIVIDED HIGHWAY WITH FRONTAGE ROADS

GENERAL NOTES:

TREE TRIMMING AND BRUSH REMOVAL

- 1. PAYMENT BY THE CENTERLINE MILE IS MADE TO THE NEAREST 1/100 (0.01) MILE.
- 2. LIMITS OF WORK ARE SHOWN AS DISTANCES FROM REFERENCE MARKERS (RM).
- 3. PAY ITEMS BY THE CENTERLINE MILE INCLUDE ALL TREE TRIMMING OR BRUSH REMOVAL IN THE RIGHT OF WAY ON BOTH SIDES OF THE HIGHWAY. FOR DIVIDED HIGHWAYS, THE MEDIAN IS INCLUDED. FOR HIGHWAYS WITH FRONTAGE ROADS, THE AREAS BETWEEN THE FRONTAGE ROADS AND MAIN LANES, AND THE AREAS OUTSIDE OF THE FRONTAGE ROADS ARE INCLUDED.
- 4. BRUSH REMOVAL AND TREE TRIMMING UNDER BRIDGES, IN AND ALONG CHANNELS AND EASEMENTS ARE PAID FOR BY THE ACRE FOR AREAS DESIGNATED ON THE PLANS.



Texas Department of Transportation

Maintenance Division Standard Plans

TREE AND BRUSH REMOVAL

TRB-15(2)

NOT TO	SCALE									
FILE: TR	B-15(2).DGN	DRAWN: MODIFIE		CHECKED: DM;	(; LJB	DW: -	CK: -		NEG NO.:	<u>.</u>
©	TxDOT APRIL 20	15	STATE DISTRICT	FEDERAL REGION		MAINTEN	ANCE PRO	JECT	•	SHEET
REVISED:	5/13/2004	LJB				RMC-6	4502	5001		7
REVISED:	9/24/2004	LJB		COUN	ITY		CONTROL	SECTION	JOB	H I GHWAY
REVISED:	APRIL 2015	JE0		DALL	AS		6450	25	001	I HOO30

approved

substrate \triangle

that can be used for each approved sign support.

WORK

Flags as required by Engineer

or as shown on plans


See the CWZTCD for the type of sign substrate

12" min.

24" max.


EXAMPLES OF SIGN SUPPORTS

SHORT TERM DURATION. DAYTIME USE ONLY PORTABLE SIGN SUPPORTS



Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports.

Nails will NOT be allowed.




SIGN IN ACCORDANCE WITH THE TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND

MOWERS AHEAD SIGNS ARE USED FOR MOWING OPERATIONS.

LITTER PICKUP AHEAD. ROAD WORK AHEAD AND WORKER AHEAD SIGNS
ARE USED AS DIRECTED FOR OTHER
MAINTENANCE OPERATIONS WHEN
ALL WORK OCCURS OFF OF THE PAVED HIGHWAY SURFACE.

ROLL-UP SIGNS CONFORMING TO DMS-8310 AND THE CWZTCD ALLOWED

*Letter dimensions and spacing for "CW21-SPECIAL" is the same as C20-1D>




TYPICAL LOCATION OF SIGNS AT HIGHWAY CROSSING

WORK AREA IS A MAXIMUM OF 2.0 MILES UNLESS OTHERWISE DIRECTED. SIGNS MAY REMAIN IN PLACE ONLY DURING DAYLIGHT HOURS. SIGNS ARE TO BE PLACED 6'TO 12'OFF OF THE PAVED SURFACE UNLESS OTHERWISE DIRECTED.

ROAD WORK AHEAD SIGNS SHOWN AS EXAMPLES ONE OF THE FOUR TYPE SIGNS WILL BE USED AS DIRECTED.

* SIGNS IN THE MEDIAN ARE REQUIRED WHEN WORK OCCURS IN MEDIAN

UNDIVIDED HIGHWAY OR FRONTAGE ROAD

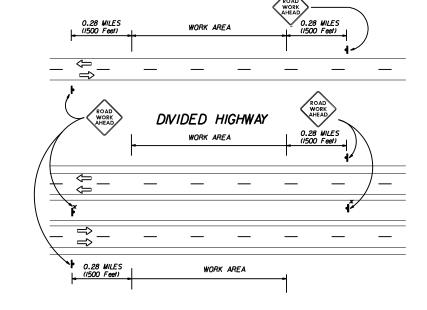

TRAFFIC CONTROL PLAN FOR WORK OFF OF THE PAVED SURFACE.

GENERAL NOTES FOR WORK ZONE SIGNS

- 1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- Nails shall NOT be used to attach signs to any support.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and quide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes. The additional signs requested by the Engineer/Inspector shall not be subsidiary.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD). The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so that the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for sign installations and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1".
- 10. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

Duration of Work (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part VI)

- 1. The Contractor is responsible for ensuring the sign support and substrate meets crashworthiness. For mowing operation all signs and supportS are Short-term Duration for daytime work.
- 2. The Contractor shall furnish the sign sizes shown on this sheet or as directed by the Engineer.

SIGN SUBSTRATES

- The Contractor shall ensure that the sign substrate is allowed for the type of sign support that is being used. The CWZTCD lists each
- substrate that can be used on the different types and models of sign supports. "Mesh" type materials are NOT an approved sign substrate.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat. 1/2" thick by 6" wide. fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign faces.

REFLECTIVE SHEETING

- Reflectorized signs shall be constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 or DMS-8310. The DMS specifications can be accessed from the following web address:
 - http://manuals.dot.state.tx.us:80/dynaweb/colmates/@Generic__CollectionView;cs=default;ts=default
- White sheeting, meeting the requirements of DMS-8300 Type C (High Specific Intensity), shall be used for signs with white background and channelizing devices.
- Orange sheeting, meeting the requirements of DMS-8300 Type E (Fluorescent Prismatic), shall be used for signs with orange backgrounds. SIGN LETTERS
- 1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- Signs should be removed or completely covered when not mowing.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- 3. Signs and supports shall be removed by the end of the day.

SIGN SUPPORT WEIGHTS

- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry cohesionless sand is recommended.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects will not be permitted for use as sign support weights.
 - Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
 - Sandbags shall be made of a durable material that tears upon vehicular impact.
 - Rubber (such as tire inner tubes) shall NOT be used for sandbags.
 - Rubber ballasts (such as those used with cones or edgeline channelizers) shall NOT be used as sign support weights.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign supports.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

Any sign, sign support or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced or repaired as soon as possible by the Contractor at the Contractor's expense.

Only pre-qualified products shall be used. A copy of the "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources and may be obtained by contacting:

Standards Engineer Traffic Operations Division - TE Texas Department of Transportation 125 East 11th Street Austin, Texas 78701-2483 Phone (512) 416-3120 Fox (512) 416-3299

Instructions to locate the "CWZTCD" on TxDOT website are:

Click on "About TxDOT", Click on "Organizational Chart". Click on Traffic Operations Box.

RS-TCP-05 SHEET 1 OF 1 NOT TO SCALE RSTCP05.DGN DN: LJB CK: JG DW:-(C) TXDOT FEBRUARY 2005 STATE FEDERAL REGION FEDERAL AID PROJECT RMC-645025001 18 N/A CONTROL SECTION JOB HIGHWAY 6450 25 001 IH003 DALLAS

ROADSIDE

TRAFFIC CONTROL PLAN

★ Texas Department of Transportation

Maintenance Division

Standard Plans

Start at website - www.dot.state.tx.us

Click on "Compliant Work Zone Traffic Control Devices". Click on "View PDF".

This site is printable.

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- 1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- 3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- 4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- 5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- 6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- 7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- 8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- 9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- 10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- 11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- 12. The Engineer has the final decision on the location of all traffic control devices.
- 13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

- 1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- 2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- 2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD) DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) MATERIAL PRODUCER LIST (MPL) ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)" STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD) TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD) TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12




Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS

BC(1)-21

			•	_			
LE:	bc-21.dgn	DN: T	<dot< td=""><td>ck: TxDOT</td><td>DW:</td><td>TxDOT</td><td>ck: TxDOT</td></dot<>	ck: TxDOT	DW:	TxDOT	ck: TxDOT
TxD0T	November 2002	CONT	ONT SECT JOB		HIGHWAY		
REVISIONS 7-13		6450	50 25 001			ΙH	0030
9-07	8-14	DIST	COUNTY		SHEET NO.		
5-10	5-21	18		DALLA	S		9

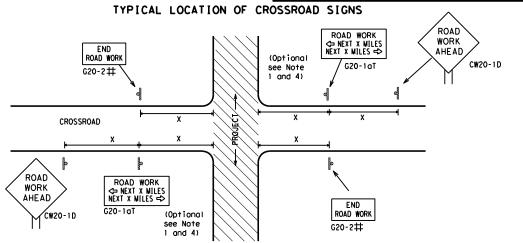

May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D)sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
- 2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
- Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
- The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
- 5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in
- the plans or as determined by the Engineer/Inspector, shall be in place.

BEGIN T-INTERSECTION WORK ZONE X X G20-9TP X X R20-5T FINES DOUBLE X R20-50TP BORKERS ARE PRESENT ROAD WORK ← NEXT X WILES END * + G20-26T WORK ZONE G20-1bTI INTERSECTED 1000'-1500' - Hwy 1 Block - City 1000'-1500' - Hwy 1 Block - City ROADWAY \Rightarrow ROAD WORK G20-1bTR NEXT X MILES => 80' WORK ZONE G20-2bT * * Limit BEGIN G20-5T * * G20-9TP ZONE TRAFFI G20-6T * * R20-5T FINES DOUBLE * R20-5gTP BORKERS ROAD WORK G20-2

CSJ LIMITS AT T-INTERSECTION

- 1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- 2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME"(G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow(G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR)" signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING 1,5,6

SIZE

SPACING

Sign△ Posted Speed Spacing "X" Feet MPH (Apprx.) 30 120 35 160 40 240 45 320 50 400 55 500² 60 600² 65 700 2 70 800² 75 900 ² 80 1000 ²

Sign onventional Expressway/ Number Freeway or Series CW201 48" × 48" CW22 48" x 48" CW23 CW25 CW1, CW2, CW7. CW8. 48" x 48' 36" x 36' CW9, CW11 CW14 CW3, CW4, CW5, CW6, 48" x 48" 48" × 48" CW8-3, CW10, CW12

* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

 \triangle Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES

CW21

- 1. Special or larger size signs may be used as necessary.
- 2. Distance between signs should be increased as required to have 1500 feet advance warning.
- 3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- 5. Only diamond shaped warning sign sizes are indicated.
- 6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS	SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS
ROAD WORK AREA AHEAD CW20-1D WORK ANEA CW20-1D CW13-1P	** \$\frac{1}{2} \frac{1}{2} \f
	\$\limins_{\lambda}\lambda\lamb
Channelizing Devices	WORK SPACE CSJ Limit PRODUCTION PRODU
When extended distances occur between minimal work spaces, the Engineer/ "ROAD WORK AHEAD"(CW20-1D)signs are placed in advance of these work areas	
within the project limits. See the applicable TCP sheets for exact locat channelizing devices.	on and spacing of signs and The Contractor shall determine the appropri

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

STAY ALERT ★ ★G20-9TP ZONE BEGIN ROAD WORK NEXT X MILES OBEY SPEED TRAFF IC X X G20-5T ROAD LIMIT ROAD ROAD ¥ ¥R20-5T FINES SIGNS WORK CLOSED R11-2 CW1 - 4 WORK DOUBLE STATE LAW ∕₂ MILE TALK OR TEXT LATER AHEAD X R20-50TP BHEN BORKERS ARE PRESENT X XG20-6T Type 3 R20-3T R2-1 G20-101 CW20-1D Barricade or CW13-1P CW20-1E channelizina devices \Diamond Channelizing Devices -CSJ Limit \Rightarrow SPEED R2-1 END LIMIT END | ROAD WORK WORK ZONE G20-26T * * G20-2 * *

The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project.

This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.

- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2b1 shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double workers are present.
- ** CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic
- Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND						
I	Type 3 Barricade					
000 Channelizing Devices						
þ	Sign					
Х	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.					

SHEET 2 OF 12

Texas Department of Transportation

BARRICADE AND CONSTRUCTION PROJECT LIMIT


Traffic Safety Division Standard

BC(2)-21

ILE:	bc-21.dgn	DN: T	<dot< th=""><th>ck: TxDOT</th><th>DW:</th><th>T×DOT</th><th>ck: TxDOT</th></dot<>	ck: TxDOT	DW:	T×DOT	ck: TxDOT
C) TxD0T	November 2002	CONT	SECT	JOB		HI	GHWAY
	REVISIONS	6450	25	001		ΙH	0030
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	18		DALLA	S		10

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

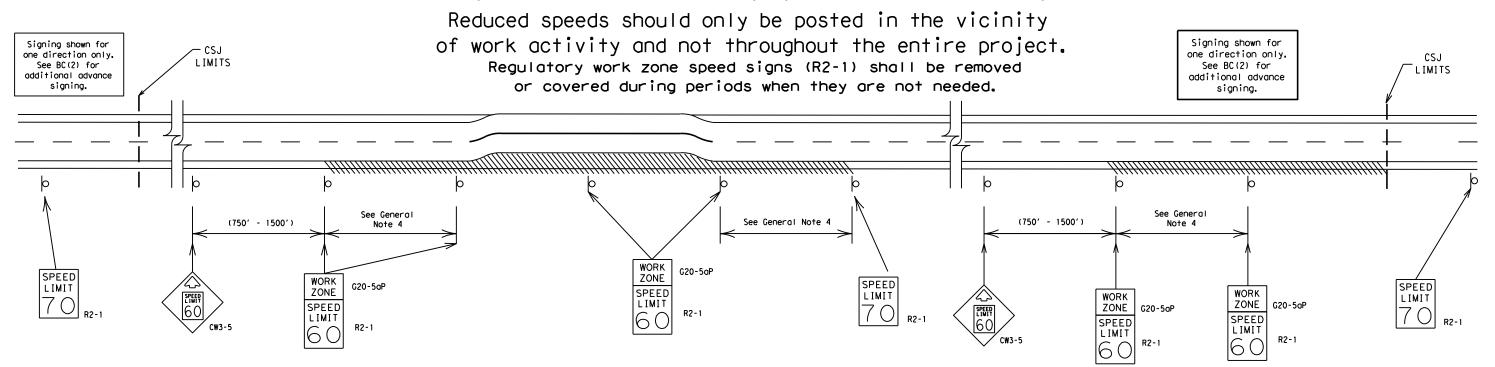

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- a) rough road or damaged pavement surface
- b) substantial alteration of roadway geometrics (diversions)
- c) construction detours
- d) grade
- e) width
- f) other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- 3. Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- 4. Frequency of work zone speed limit signs should be:

40 mph and greater 0.2 to 2 miles

35 mph and less 0.2 to 1 mile

- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- 7. Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- 8. Techniques that may help reduce traffic speeds include but are not limited to:
 A. Law enforcement.
 - B. Flagger stationed next to sign.
 - C. Portable changeable message sign (PCMS).
 - D. Low-power (drone) radar transmitter.
- E. Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only.
 Work Zone Speed Limits should only be posted as approved for each project.
- 10. For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

SHEET 3 OF 12




Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

BC(3)-21


E:	bc-21.dgn	DN: Tx[)OT	ck: TxDOT	DW:	TxDOT	ck: TxDOT	
TxDOT	November 2002	CONT	SECT	CT JOB		HIGHWAY		
REVISIONS		6450	25	001		IH0030		
9-07	8-14 5-21	DIST		COUNTY			SHEET NO.	
7-13	3-21	18		DALLA	S		11	

TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

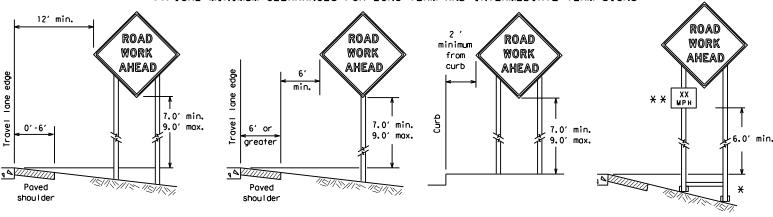

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

* * When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

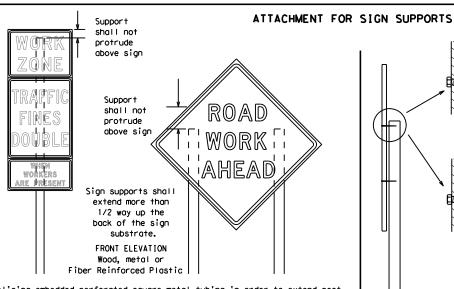

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two SIDE ELEVATION above and two below the spice point. Splice must be located entirely behind Wood the sign substrate, not near the base of the support. Splice insert lengths

Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports


> Nails shall NOT be allowed. Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

STOP/SLOW PADDLES

should be at least 5 times nominal post size, centered on the splice and

of at least the same gauge material.

- 1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflectorized when used at night. 3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- 4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.



SHEETING RE	QUIREMENT	TS (WHEN USED AT NIGHT)
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CW7TCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question reaardina installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

<u>DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)</u>

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary work that occupies a location more than 3 days.
 - Intermediate-term stationary work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - Short-term stationary daytime work that occupies a location for more than 1 hour in a single daylight period.
 - Short, duration work that occupies a location up to 1 hour. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plagues mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above
- the ground. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

- 1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300
- for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- 3. Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL} , shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting. Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

- 1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used. The sandbags will be tied shut to keep the sand from spilling and to maintain a
- constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular
- impact. Rubber (such as tire inner tubes) shall NOT be used. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured
- with rubber bases may be used when shown on the CWZTCD list. Sandbags shall only be placed along or laid over the base supports of the
- traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12

Traffic Safety Division Standard



BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) -21

FILE:	bc-21.dgn	DN: T	(DOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
© TxD0T	November 2002	CONT	SECT	JOB		HIG	SHWAY
	REVISIONS		25	001		IΗ	0030
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	18		DALLA	S		12



Welds to start on

opposite sides going in opposite directions. Minimum

weld, do not

back fill puddle.

weld starts here

¥ Maximum 12 sq. ft. of **X** Maximum wood 21 sq. ft. of sign face post sign face 2x6 4x4 block block 72" Length of skids may be increased for wood additional stability. for sign Top See BC(4) height for sign 2x4 brace requirement height 3/8" bolts w/nuts requiremen or 3/8" x 3 1/2" (min.) lag screws Front 4x4 block 40" 4x4 block 36" Side Front SKID MOUNTED WOOD SIGN SUPPORTS * LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

-2" x 2"

12 ga. upright

2"


SINGLE LEG BASE

Sign Post Pos Post max. desirable 34" min. in Optional strong soils, reinforcing 48" 55" min. in minimum sleeve -34" min, in weak soils. (1/2" larger strong soils, than sian 55" min, in post) x 18' weak soils. Anchor Stub Anchor Stub (1/4" larger (1/4" larger than sign than sign post) post) -OPTION 2 OPTION 1 OPTION 3 (Anchor Stub) (Direct Embedment) (Anchor Stub and Reinforcing Sleeve)) PERFORATED SQUARE METAL TUBING

Post See the CWZTCD for embedment. WING CHANNEL

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

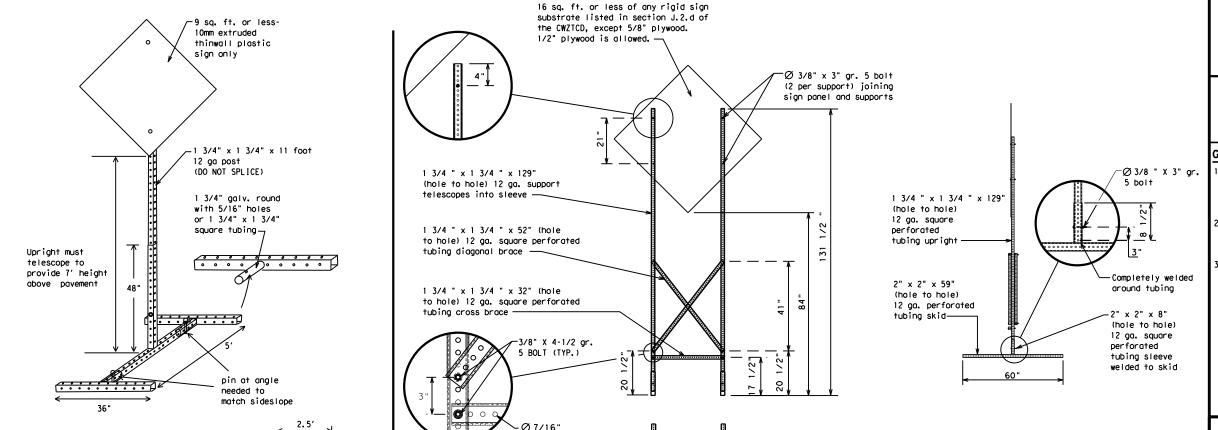

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final
- No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CW7TCD List.
- When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
 - See BC(4) for definition of "Work Duration,"
 - Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
 - ☐ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

ILE:	bc-21,dgn	DN: T>	(DOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
C) TxDOT	November 2002	CONT	SECT	JOB		H	IGHWAY
		6450	25	001		I	H0030
• •	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	18		DALLA	S		13

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

32'

Maint. Contracts\2024 RMC Folder∖Tree Trimm

: T:\DALAO\DALNEAO\Moint. Co

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS
BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR." "AT." etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit romp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- 8. The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- 10. Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- 11. Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- 13. Do not display messages that scroll horizontally or vertically across the face of the sign.
- 14. The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- 15. PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- 16. Each line of text should be centered on the message board rather than left or right justified.
- 17. If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

MORD OR PHRASE ABBREVIATION Access Road ACCS RD Alternate ALT Avenue Best Route Best Route Best Route Best Route Best Route Boulevard BLYD Bridge Cannot Cantot Cantot Cantot Construction Ahead CROSSING CROSSING Detour Route De Tour Route Do Not Do Not Do Not East Eastbound (route) E Emergency Emergency Vehicle Emergency Vehicle Entrance, Enter Express Lane Express Lane Expressway XXXX Feet XXXX FT Fog Ahead Fog Ahead Fog Ahed Freeway Freeway Freeway Freeway Hour(s) Hazmati High-Occupancy Hour(s) Hazmati High-Occupancy Hour(s) Hazmati Left L				
Alternate ALT Avenue AVE Best Route BEST RTE Boulevard BLVD Bridge BRDG Cannot CANT Center CTR Construction Ahead CROSSING XING Detour Route DETOUR RTE Do Not DONT East E Eastbound (route) E Emergency EMER Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway Blocked FWY BLKD Friddy Friddy Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy Hour (s) Left Lane LFT LN Left Lane Closed LN CLOSED Lower Level LWR LEVEL Wint Miles Per Hour MPH Minor Montal Selection Miles Per Hour MPH Minor Montal Selection Mont North N North Mondy Mon Normal North Mondy Mon Normal North Mondy Mon Normal North Mondy Mon Norm North N North Mondy Miles Per Hour MPH Minor Mondy Mon Normal North N	WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Avenue AVE Best Route BEST RTE Boulevard BLYD Bridge BRDG Cannot CANT Center CTR Construction Ahead CROSSING XING Detour Route DETOUR RTE Do Not DONT East E Eastbound (route) E Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Freeway Freeway FRWY, FWY Freeway Blocked FWY BLKD Friddy MRZ Hour(s) HR, HRS Information INFO Lane Closed LN CLOSED Lower Level LWR LEYEL Miles Per Hour MPH Minor Monday Monday Monday Monday Monday Monday Mond Monday Month Northonele Refered Refine Refin	Access Road	ACCS RD	Major	MAJ
Best Route BEST RTE Boulevard BLVD Bridge BRDG Cannot CANT Center CTR Construction Ahead CONST AHD Ahead RO Detour Route DETOUR RTE Do Not DONT East E Eastbound Iroute) E Emergency EMER Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Express Lane EXP LN Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Froeway FRWY, FWY Freeway Blocked FWY BLKD Friday Friedy Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO Left Left Left Left Left Left Left Lane Left LN Lone Closed LWR LEYEL Wining Monday Mon Monday Mon Monday Mon Monday Mon Monday Mon Mon Monday Mon Mon Mondy Mon	Alternate	ALT	Miles	мі
Boulevard BLVD Bridge BRDG Cannot CANT Center CTR Construction Ahead CROSSING Detour Route DETOUR RTE DO Not East E Eastbound Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane Express Lane Expressway XXXX Feet XXXX FT Freeway Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday Hozardous Material High-Occupancy How Left Left Left Left Lane Closed Lower Level LWR LEVEL Wortholman North N	Avenue	AVE	Miles Per Hour	MPH
Bridge BRDG Cannot CANT Center CTR Construction Ahead CONST AHD CROSSING XING Detour Route DETOUR RTE DO Not DONT East E Eastbound (route) E Emergency EMER Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday Mazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Hour (s) HR, HRS Information INFO It Is ITS JUnction JCT Left Left Left Left Left Left Left Lane LFT LN CONST AHD North N North	Best Route	BEST RTE	Minor	MNR
Cannot CanT Center CTR Construction Ahead CONST AHD Ahead RO CROSSING XING Detour Route DETOUR RTE Do Not DONT East E Eastbound (route) E Emergency EMER Entrance, Enter ENT Express Lane EXP LN Expressway EXPMY XXXX Feet XXXX FT Freeway Freeway FRWY, FWY Freeway Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday FRI Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO Lane Closed LN CLOSED Lower Level LWR LEYEL Northown Northbound (route) N Parking PKINC Road RD Right Lane RT LN Saturday SAT Service Road SERV RD Saturday SAT Service Road SERV RD South S So	Boulevard	BLVD	Monday	MON
Center CTR Construction Ahead CROSSING XING Detour Route DETOUR RTE Do Not DONT East E Eastbound (route) E Emergency Vehicle EMER VEH Express Lane EXP LN Express Lane	Bridge	BRDG	Normal	NORM
Construction Ahead CROSSING CROSSING Detour Route DETOUR RTE DO Not East East East Emergency Emergency Emergency Emergency Express Lane Expressway Expressway Express Lane Expressway Express Lane Expressway Express Lane Expressway Expressway Express Lane Expressway Express	Cannot	CANT	North	N
Ahead CROSSING Detour Route Do Not East East Eastbound Croute) E Emergency Emergency Vehicle Entrance, Enter Express Lane Expressway Expressway Expressway Freeway Friday Hazardous Driving Hazardous Driving Hazardous Material Hazwar High-Occupancy How Hour(s) Hayardion Hayardion Hour(s) Hayardion H	Center	CTR	Northbound	(route) N
CROSSING XING Detour Route DETOUR RTE DO Not DONT East E Eastbound (route) E Emergency EMER Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Froeway FRWY, FWY Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday FRI Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO Left Left Left Left Left Left Left Lane LFT LN Eastbound Right Lane RT LN Saturday SAT Service Road SERV RD Shoulder SHLDR South S South Seed S South Seed S South S		CONST AHD		
Detour Route Detour RTE Do Not DoNot East Eastbound Iroute) E Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane Express Lane Expressway Express Exercic Road SERV RD Shoulder SHLDR Southbound Iroute) S Speed SPD Street Sunday Sun Telephone PHONE Temporary Thursday Thursday Thursday To Downtown To Downtown Traffic Travelers Trav		YING		
Do Not DONT East E Eastbound (route) E Emergency EMER Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday FRI Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left Left LFT Left Lane LFT LN Lone Closed LN CLOSED Lower Level LWR LEVEL Service Road SERV RD Service Road SERV RD Southbound (route) S Suhbound (route) S Street ST Southbound (route) S Street ST Southbound (route) S Street ST Sunday SUN Telephone PHONE Temporary TEMP Thursday THURS To Downtown TO DWNTN Traffic TRAF Travelers TRYLRS Travelers TRYLRS Time Minutes TIME MIN Upper Level UPR LEVEL Vehicles (s) VEH, VEHS Warning WaRN Wednesday WED Weight Limit WT LIMIT West West Pavement WET PVMT				
East E E Shoulder SHLDR Shoulder SHLDR Shoulder SHLDR Shippery SLIP South S So				
Eastbound (route) E Emergency				
Emergency EMER Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday Friday HAZ DRIVING Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left Left Left Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL South S Southbound (route) S Sped SPD Street ST Sunday SUN Telephone PHONE Temporary TEMP Thursday THURS To Downtown TO DWNTN Traffic TRAF Travelers TRVLRS Travelers TRVLRS Tuesday TUES Time Minutes TIME MIN Upper Level UPR LEVEL Vehicles (s) VEH, VEHS Warning WARN Wednesday WED Weight Limit WT LIMIT West Westbound (route) W Wet Pavement WET PVMT		•		
Emergency Vehicle EMER VEH Entrance, Enter ENT Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday FRI Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left Left LFT Left Lane LFT LN Lone Closed LN CLOSED Lower Level URR LEVEL Southbound (route) \$ Southbo				
Entrance, Enter ENT Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway FRI Hazardous Driving HAZ DRIVING Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle Highway HWY Hour(s) HR, HRS Information INFO It is ITS Junction JCT Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL Speed SPD Street ST Sunday SUN Telephone PHONE Temporary TEMP Trayelers TRAF Trayelers TRAF Trayelers TRAF Trayelers TRUKS Tuesday TUES Time Minutes TIME MIN Upper Level UPR LEVEL Warning WARN Wednesday WED Weight Limit WT LIMIT West Westbound (route) W Wet Pavement WET PVMT Will Not WONT				
Express Lane EXP LN Expressway EXPWY XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway Blacked FWY BLKD Friday Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEYEL Street ST Itelephone PHONE Temporary TEMP Thursday THURS To Downtown TO DWNTN Traffic TRAF Travelers TRYLRS Tuesday TUES Time Minutes TIME MIN Upper Level UPR LEVEL Warning WARN Wednesday WED Weight Limit WT LIMIT Westbound (route) W Westbound (route) W Wet Pavement WET PYMT				
Expressway XXXX Feet XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway Friday Friday Hozardous Driving HAZ DRIVING Hozardous Material HAZMAT High-Occupancy Vehicle HWY Highway Hour(s) HR, HRS Information INFO Left Left Left Left Left Left Lane Line Closed Line Line Lone				
XXXX Feet XXXX FT Fog Ahead FOG AHD Freeway FRWY, FWY Freeway FRWY, FWY Freeway Blocked FWY BLKD Friddy FRI Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Venicle Highway HWY Hour (s) HR, HRS Information INFO It Is ITS Junction JCT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL Telephone PHONE Temporary TEMP Thursday THURS To Downtown TO DWNTN Traffic TRAF Travelers TRYLRS Tuesday TUES Time Minutes TIME MIN Upper Level UPR LEVEL Weincles (s) YEH, VEHS Warning WARN Wednesday WED Weight Limit WT LIMIT West Westbound (route) W Wet Pavement WET PVMT Will Not WONT				
Fog Ahead FOG AHD Freeway FRWY, FWY Freeway Freeway FRWY, FWY Freeway Friday FRI Hazardous Driving Haz DRIVING Hazardous Material Hazwat High-Occupancy Vehicle Highway Hour(s) HAR, HRS Information INFO It Is Junction Left Left Left Left Lane Closed Lower Level LWR LEYEL Temporary Temporary Tomorary Tomorary Tomorary Tomorary Tomorary Tomorary Temporary Temporary Temporary Temporary Temporary Temporary Tomorary Temporary Tomorary Temporary Temporary Tomorary Tomorary Temporary Temporary Tomorary Tomorary Temporary Tomorary Tomorary Tomorary Temporary Tomorary Temporary Tomorary Temporary Tomorary Temporary Tomorary Temporary Tomorary Tomorary Temporary Tomorary Temporary Tomorary Temporary Tomorary Tomorary Tomorary Tomorary Tomorary Tomorary Tomorary Temporary Tomorary Tomor		— **** *** ***		
Freeway FRWY, FWY Freeway Blocked FWY BLKD Friday FRI Hazordous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO It is ITS Junction JCT Left Left LFT Left Lane LFT LN Lone Closed LN CLOSED Lower Level LWR LEVEL Thursday THURS To Downtown TO DWNTN Traffic TRAF Travelers TRVLRS Tuesday TUES TUESday TUES VEHICLES (S) VEH, VEHS Warning WARN Wednesday WED Weight Limit WT LIMIT Westbound (route) W Westbound (route) W				
Freeway Blocked FWY BLKD Friday FRI Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle Highway Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left Left LFT Left Lane LFT LN Lone Closed LN CLOSED Lower Level LWR LEYEL To Downtown To DWNTN Traffic TRAF Travelers TRVLRS Travelers TRVLRS Travelers TRVLRS Travelers TRVLRS Tuesday TUES Time Minutes TIME MIN Upper Level UPR LEVEL Vehicles (s) VEH, VEHS Warning WARN Wednesday WED Weight Limit WT LIMIT West Westbound (route) W Wet Pavement WET PVMT Will Not WONT				
Friday Friday Friday Friday FRI Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy Vehicle Highway Vehicle Highway HOV Vehicle Highway HOV Vehicle Highway HOV Vehicle Highway HOV Vehicles HWY HOV Vehicles HWY HOV Vehicles HWY HOV Vehicles Vehicles (s) VEH, VEHS Warning WaRN Wednesday WeD Weight Limit West Westbound (route) Westbound (route) Wet Pavement Wet Pavement Well Not Well Not				
Hazardous Driving HAZ DRIVING Hazardous Material HAZMAT High-Occupancy HOV Vehicle Highway Hour(s) HR, HRS Information INFO 11 Is ITS Junction JCT Left Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level WR LEVEL Travelers TRVLRS Tuesday TUES Time Minutes TIME MIN Upper Level UPR LEVEL Vehicles (s) VEH, VEHS Warning WARN Wednesday WED Weight Limit WT LIMIT West Westbound (route) W Wet Pavement WET PVMT Will Not WONT				
Hazardous Material HAZMAT High-Occupancy HOV Vehicle HWY Highway Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWAZMAT Truesday TUES TIME MIN Upper Level UPR LEVEL Vehicles (s) VEH, VEHS Warning WARN Wednesday WED Weight Limit WT LIMIT Westbound (route) W Westbound (route) W Wet Pavement WET PVMT Will Not WONT				
High-Occupancy HOV Vehicle Highway Hour(s) Information INFO It Is Junction Left Left Lane Left Lane Lone Closed Lower Level LWR LEVEL HWY HWY HOW Time Minutes TIME MIN Upper Level UPR LEVEL Vehicles (s) VEH, VEHS Warning WaRN Wednesday WED Weight Limit West Westbound (route) W Wet Pavement WET PVMT Will Not Will Not WONT				
Vehicle Highway Hour(s) HR, HRS Information INFO It Is Junction Left Left Left Lane Left Lane Lone Closed Lower Level LWR LEVEL HWY HUPPER Level Upper Level Upper Level Upper Level Upper Level Upper Level Upper Level Warning Warn Wednesday Wednesday Weight Limit West Westbound (route) W Wet Pavement WET PVMT Will Not Will No				
Highway Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL Upper Level UPR LEVEL Vehicles (s) VEH, VEHS Warning WARN Wednesday WED Weight Limit WT LIMIT West W Westbound (route) W Wet Pavement WET PVMT Will Not WONT				
Hour(s) HR, HRS Information INFO It Is ITS Junction JCT Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL		HWY		
Information		HR. HRS		
It Is				
Junction JCT Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL Weight Limit W Limit Westbound (route) W Wet Pavement WET PVMT Will Not WONT				
Left LFT Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL West W West W West W West W West W West S West W West S West W West S W				
Left Lane LFT LN Lane Closed LN CLOSED Lower Level LWR LEVEL Westbound (route) W Wet Pavement WET PVMT Will Not WONT				•••
Lane Closed LN CLOSED Lower Level LWR LEVEL WET POVENIENT				
Lower Level LWR LEVEL				
			Will Not	WONT
	Maintenance	MAINT		

Roadway

designation # IH-number, US-number, SH-number, FM-number

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

Phase 1: Condition Lists

FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED	ROADWORK XXX FT	ROAD REPAIRS XXXX FT
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT	FLAGGER XXXX FT	LANE NARROWS XXXX FT
ROAD	RIGHT LN	RIGHT LN	TWO-WAY
CLSD AT	CLOSED	NARROWS	TRAFFIC
FM XXXX	XXX FT	XXXX FT	XX MILE
RIGHT X	RIGHT X	MERGING	CONST
LANES	LANES	TRAFFIC	TRAFFIC
CLOSED	OPEN	XXXX FT	XXX FT
CENTER	DAYTIME	LOOSE	UNEVEN
LANE	LANE	GRAVEL	LANES
CLOSED	CLOSURES	XXXX FT	XXXX FT
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED	DETOUR X MILE	ROUGH ROAD XXXX FT
VARIOUS	EXIT XXX	ROADWORK	ROADWORK
LANES	CLOSED	PAST	NEXT
CLOSED	X MILE	SH XXXX	FRI-SUN
EXIT CLOSED	RIGHT LN TO BE CLOSED	BUMP XXXX FT	US XXX EXIT X MILES
MALL	X LANES	TRAFFIC	LANES
DRIVEWAY	CLOSED	SIGNAL	SHIFT

CLOSED TUE - FRI XXXX FT

XXXXXXXX

BLVD ** LANES SHIFT in Phase 1 must be used with STAY IN LAN

f X LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

	e/Effect on Travel List	Location List	Warning List	* * Advance Notice List
MERGE RIGHT	FORM X LINES RIGHT	FM XXXX	SPEED LIMIT XX MPH	TUE-FRI XX AM- X PM
DETOUR NEXT X EXITS	USE XXXXX RD EXIT	BEFORE RAILROAD CROSSING	MAXIMUM SPEED XX MPH	APR XX- XX X PM-X AM
USE EXIT XXX	USE EXIT I-XX NORTH	NEXT X MILES	MINIMUM SPEED XX MPH	BEGINS MONDAY
STAY ON US XXX SOUTH	USE I-XX E TO I-XX N	PAST US XXX EXIT	ADVISORY SPEED XX MPH	BEGINS MAY XX
TRUCKS USE US XXX N	WATCH FOR TRUCKS	XXXXXXX TO XXXXXXX	RIGHT LANE EXIT	MAY X-X XX PM - XX AM
WATCH FOR TRUCKS	EXPECT DELAYS	US XXX TO FM XXXX	USE CAUTION	NEXT FRI-SUN
EXPECT DELAYS	PREPARE TO STOP		DRIVE SAFELY	XX AM TO XX PM
REDUCE SPEED XXX FT	END SHOUL DER USE		DRIVE WITH CARE	NEXT TUE AUG XX
USE OTHER ROUTES	WATCH FOR WORKERS			TONIGHT XX PM- XX AM
STAY IN LANE	*	* * S	ee Application Guidelin	nes Note 6.

APPLICATION GUIDELINES

- 1. Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- 6. For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- 1. The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- 3. EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- 4. Highway names and numbers replaced as appropriate.
- 5. ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- 7. FT and MI, MILE and MILES interchanged as appropriate.
- 8. AT, BEFORE and PAST interchanged as needed.

9. Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4)


PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

CLOSED

- 1. When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- 2. When symbol signs, such as the "Flagger Symbol"(CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- 3. When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- 4. A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

SHEET 6 OF 12




Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC(6)-21


FILE:	bc-21.dgn	DN: T	<dot< th=""><th>ck: TxDOT</th><th>DW:</th><th>TxDOT</th><th>CK: TXDOT</th></dot<>	ck: TxDOT	DW:	TxDOT	CK: TXDOT
C TxD0T	November 2002	CONT	SECT JOB		H	HIGHWAY	
	REVISIONS	6450	25	001		I	H0030
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	18		DALLA	S		14

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of pregualified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- 2. Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.



CONCRETE TRAFFIC BARRIER (CTB)

- 3. Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- 5. When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- 6. Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- 7. Maximum spacing of Barrier Reflectors is forty (40) feet.
- 8. Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- 9. Attachment of Barrier Reflectors to CTB shall be per manufacturer's
- 10. Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer
- 11. Single slope barriers shall be delineated as shown on the above detail.




LOW PROFILE CONCRETE BARRIER (LPCB)

reflectors is 20 feet.

Attach the delineators as per manufacturer's recommendations.

IN WORK ZONES




DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the apppropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH), Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

WARNING LIGHTS

- 1. Warning lights shall meet the requirements of the TMUTCD.
- 2. Warning lights shall NOT be installed on barricades.
- 3. Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- 4. Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- 5. The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- 6. When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights. 7. When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- 8. The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- 1. Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- 2. Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- 3. A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- 4. Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- 5. Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- 6. Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- 7. The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- 1. A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- 2. The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed
- 3. The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- 4. Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- 5. Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- 7. When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- 8. The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- 9. The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- 1. The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- 2. Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- 4. The Flashing Arrow Board should be able to display the following symbols:

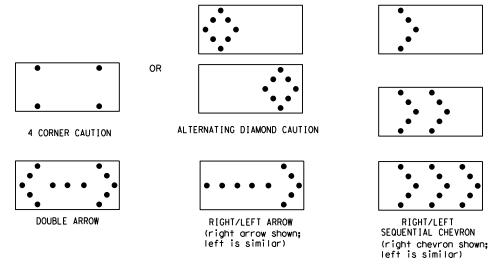

- 5. The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- 8. Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal
- intervals of 25 percent for each sequential phase of the flashing chevron.

 9. The sequential arrow display is NOT ALLOWED.

 10. The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
 A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
 A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility,
- flash rate and dimming requirements on this sheet for the same size arrow.
- 14. Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

	REQUIREMENTS										
TYPE	MINIMUM Size	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE								
В	30 × 60	13	3/4 mile								
С	48 × 96	15	1 mile								

ATTENTION Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- 1. Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- 3. Refer to the CWZTCD for a list of approved TMAs.
- 4. TMAs are required on freeways unless otherwise noted in the plans.
- 5. A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION ARROW PANEL. REFLECTORS. WARNING LIGHTS & ATTENUATOR

BC(7)-21

ILE:	bc-21.dgn	DN: TxDOT CK: TxDOT		DW:	TxDOT	ck: TxDOT		
C) TxD0T	November 2002	CONT SECT JOB		HI	HIGHWAY			
REVISIONS		6450	25	001		ΙH	0030	
9-07	8-14	DIST		COUNTY			SHEET NO.	
7-13	5-21	18		ΠΔΙΙΔ	ς		15	



GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- 2. For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42 two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- 3. For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- 6. The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:

- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- 2. The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- 4. Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- 5. The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- 6. The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- 7. Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the down had from the base.
- to be held down while separating the drum body from the base. 8. Plastic drums shall be constructed of ultra-violet stabilized, orange,
- high-density polyethylene (HDPE) or other approved material.


 9. Drum body shall have a maximum unballasted weight of 11 lbs.
- 10.Drum and base shall be marked with manufacturer's name and model number.


RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST

- 1. Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- 6. Ballast shall not be placed on top of drums.
- 7. Adhesives may be used to secure base of drums to pavement.

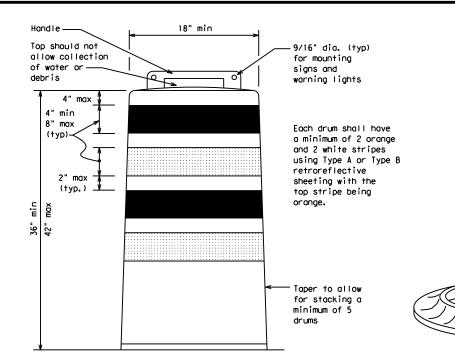




DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade,
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- 4. Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign (Maximum Sign Dimension) Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer

See Ballast



12" x 24"
Vertical Panel
mount with diagonals
sloping down towards
travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- 2. Chevrons and other work zone signs with an orange background shall be manufactured with Type $B_{\rm FL}$ or Type $C_{\rm FL}$ Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- 4. Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- 7. Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8)-21


E: bc-21.dgn	DN: TxDOT		ck: TxDOT Dw:		TxDOT ck: Tx[
TxDOT November 2002	CONT	CONT SECT JOB HIGHWA		HWAY			
	6450	6450 25 001			I H0030		
-03 8-14 -07 5-21	DIST	ST COUNTY			SHEET NO.		
-13	18		DALLA	S		16	



PORTABLE


- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- 2. VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- 3. VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
 Where the height of reflective material on the vertical
- Where the height of reflective material on the vertice panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

VERTICAL PANELS (VPs)



- 1. Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- 4. The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type $B_{\rm FL}$ or Type $C_{\rm FL}$ conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)




- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- 3. Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- 4. To be effective, the chevron should be visible for at least 500 feet.
- 5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_E or Type C_E conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- 3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- 6. Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- 7. The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.



LONGITUDINAL CHANNELIZING DEVICES (LCD)

36"

Fixed Base w/ Approved Adhesive

(Driveable Base, or Flexible

Support can be used)

- 1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- 2. LCDs may be used instead of a line of cones or drums.
- 3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- 6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- 3. Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

Posted Speed	Formula	_	esirab er Lend **	-	Spacir Channe			
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	2	150′	1651	180′	30'	60′		
35	L = WS ²	2051	225′	2451	35'	70′		
40	80	2651	2951	320'	40'	80′		
45		450′	4951	540′	45′	90′		
50		500′	550′	600,	50′	100′		
55	L=WS	550′	6051	660′	55′	110′		
60	- 3	600'	660′	720′	60,	120′		
65		650′	715′	7801	65 <i>°</i>	130'		
70		700′	770′	840′	70′	140'		
75		750′	825′	900'	75'	150′		
80		800′	880′	9601	80,	160′		
XX Taper lengths have been rounded off.								

**X*Taper lengths have been rounded off.
L=Length of Taper (FT.) W=Width of Offset (FT.)
S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



Traffic Safety Division Standard

Suggested Maximum

BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES


BC (9) -21

ILE:	bc-21.dgn	DN: T	<dot< th=""><th>ck: TxDOT</th><th>DW:</th><th>TxDOT</th><th>ck: TxDOT</th></dot<>	ck: TxDOT	DW:	TxDOT	ck: TxDOT
C) TxDOT	November 2002	CONT	SECT	JOB		HIG	CHWAY
REVISIONS		6450	25	001		IHO	0030
9-07 8-1 7-13 5-2	8-14	DIST		COUNTY			SHEET NO.
	5-21	18		DALLA	S		17


103

TYPE 3 BARRICADES

- 1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
- 2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
- 3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
- Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
- Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
- 6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
- Warning lights shall NOT be installed on barricades.
- Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags, Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
- Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.



TYPICAL STRIPING DETAIL FOR BARRICADE RAIL



Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

TYPICAL PANEL DETAIL

Each roadway of a divided highway shall be NAME ADDRESS CITY STATE barricaded in the same manner. R11-2 620-61 CLOSED DETOUR M4-10L 30 feet PERSPECTIVE VIEW Detour Roadway The three rails on Type 3 barricades shall be reflectorized orange and 10 reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour. 1. Signs should be mounted on independent supports at a 7 foot 8' max. length Type 3 Barricades mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades. PLAN VIEW 2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

Two-Piece cones

1. Where positive redirectional capability is provided, drums may be omitted. 2. Plastic construction fencing may be used with drums for safety as required in the plans. 3. Vertical Panels on flexible support may be substituted for drums when the Typical shoulder width is less than 4 feet. Plastic Drum 4. When the shoulder width is greater than 12 feet, steady-burn lights PERSPECTIVE VIEW may be omitted if drums are used. 5. Drums must extend the length These drums are not required of the culvert widening. on one-way roadway LEGEND Plastic drum Plastic drum with steady burn light two drums s ss the work or yellow warning reflector teady burn warning light or yellow warning reflector \bigcirc Increase number of plastic drums on the side of approaching traffic if the crown width makes it necessary. (minimum of 2 and maximum of 4 drums) PLAN VIEW

CONES 4" min. orange ▼ 2" min. ↑ 4" min. white 2" min. 1 4" min. orange [6" min. _2" min. 2" min. $\sqrt{14}$ min. 4" min. white 42" min. 28' min.

2" min 4" min.

3" min. 2" to 6" min.

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

One-Piece cones

Tubular Marker

FOR SKID OR POST TYPE BARRICADES

Alternate Alternate Drums, vertical panels or 42" cones Approx. Approx. at 50' maximum spacing 50' 50' Min. 2 drums or 1 Type 3 or 1 Type 3 barricade STOCKPILE П On one-way roads Desiroble downstream drums stockpile location Channelizing devices parallel to traffic or barricade may be is outside should be used when stockpile is omitted here clear zone. within 30' from travel lane. \Diamond \Rightarrow

TRAFFIC CONTROL FOR MATERIAL STOCKPILES

28" Cones shall have a minimum weight of 9 1/2 lbs.

42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

- 1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
- 2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
- 3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
- 4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
- 5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
- 6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
- 7. Cones or tubular markers used on each project should be of the same size and shape.

SHEET 10 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

Traffic Safety Division Standard

BC(10)-21

E:	bc-21.dgn	DN: TxDOT		ck: TxDOT	DW:	TxDOT	ck: TxDOT
TxDOT	November 2002	CONT	SECT	JOB		HIGHWAY	
		6450	25 001			IH0030	
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	18		DALLA	S		18

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ (STPM).
- 6. When standard povement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- 1. Raised pavement markers are to be placed according to the patterns
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated povement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- 3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type povement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- 7. Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Fnaineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- 10.Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

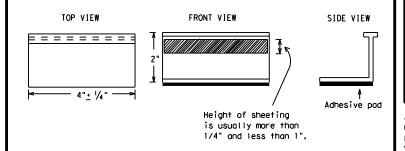

STAPLES OR NAILS SHALL NOT BE USED TO SECURE TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS TO THE PAVEMENT SURFACE

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - A. Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - B. Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- 3. Small design variances may be noted between tab manufacturers.
- 4. See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised povement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
YELLOW - (two amber reflective surfaces with yellow body).
WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIO	NS
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



Traffic Safety Division Standard


BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS


BC(11)-21

		- •				
E: bc-21.dgn	DN: TxDOT		ck: TxDOT Dw:		T×DOT	ck: TxDOT
TxDOT February 1998	CONT SECT		JOB		HIGHWAY	
REVISIONS -98 9-07 5-21	6450	25	001		I H0030	
-98 9-07 5-21 -02 7-13	DIST	ST COUNTY			SHEET NO.	
-02 8-14	18	DALLAS 1			19	


105

PAVEMENT MARKING PATTERNS

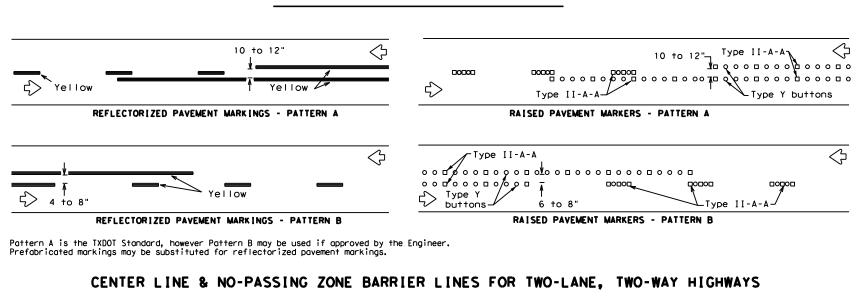

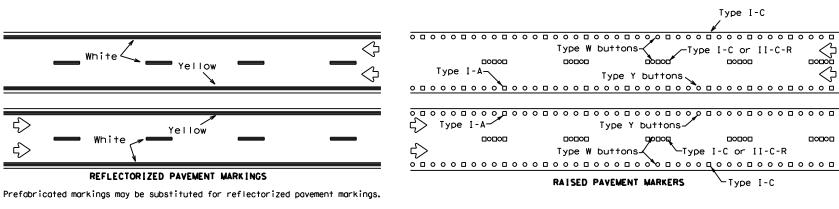


EDGE & LANE LINES FOR DIVIDED HIGHWAY




Prefabricated markings may be substituted for reflectorized pavement markings.

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

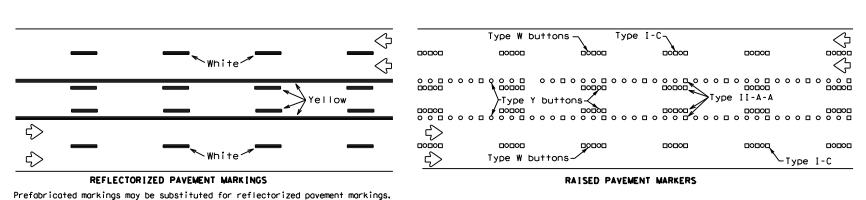



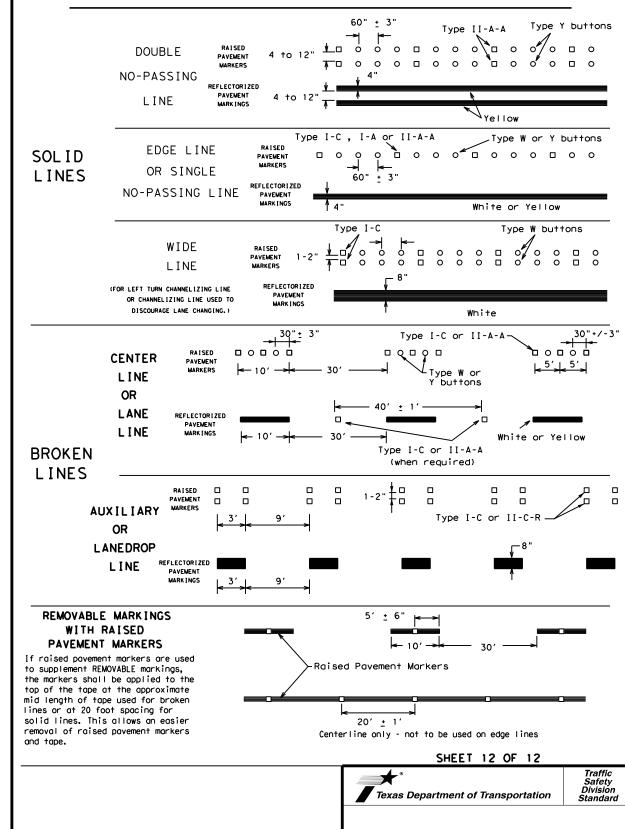

STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS Raised pavement markers used as standard pavement markings shall be from the approved


BC(12)-21

DN: TXDOT CK: TXDOT DW: TXDOT CK: TXDO © TxDOT February 1998 IH0030 6450 25 001 1-97 9-07 5-21 2-98 7-13 11-02 8-14 DALLAS 20

products list and meet the requirements of

Item 672 "RAISED PAVEMENT MARKERS,"

TABLE 1 Warning sign and rumble strip # of Rumble sequence in Flagger Strip opposite direction (Length of Work Area) Arrays is some as below. < 4,500 1/8 Mile 4,500 2 3,500 1/4 Mile > 3,500 2 < 2,600 1 1/2 Mile <u>></u> 2,600 2 < 1,600 1 1 Mile 2 <u>></u> 1,600 > 1 Mile N/A -See note 8 Rumble Strip Array (See note 1) Rumble Strip Array (See note 1) The second Rumble Strip Array is required when the ADT thresholds in Table 1 indicate the need for 2 Arrays. RUMBLE ↔ AHEAD, CW17-2T 48" X 48" (See note 2) ROAD WORK AHEAD CW20-1D 48" X 48" WZ (RS-1a) RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

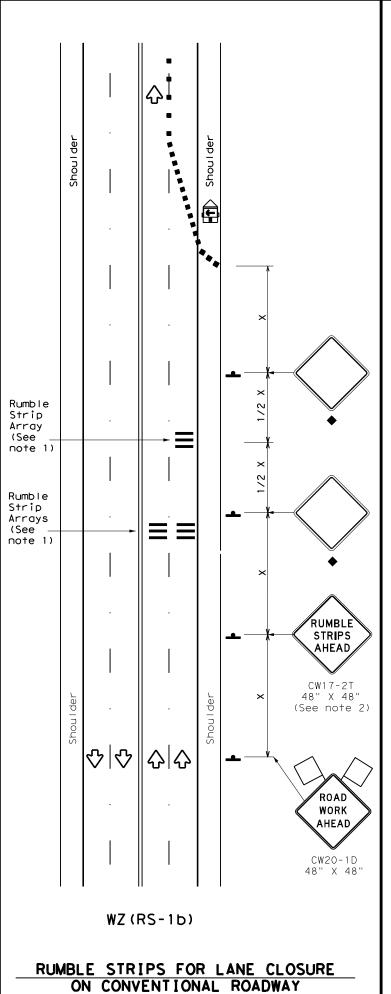

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- 2. The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- 4. Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- B. The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- 10. Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

	LEGEND								
	Type 3 Barricade		Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
£	Trailer Mounted Flashing Arrow Panel	M	Portable Changeable Message Sign (PCMS)						
-	Sign	Ŷ	Traffic Flow						
\Diamond	Flag	ЦO	Flagger						

Posted Formula Speed		Desirable			Spacir Channe		Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"
30	ws ²	150′	1651	1801	30′	60′	120'	90′
35	L= WS	2051	2251	2451	35′	701	160′	120′
40	6	2651	2951	3201	40′	80'	240'	155′
45		450′	495′	540'	45′	90,	3201	195′
50		5001	550′	6001	50°	100′	4001	240′
55	L=WS	550′	605′	660′	55′	110'	500′	295′
60	L - # 3	600′	660′	720′	60`	120'	600′	350′
65		650'	715′	7801	65′	130′	700′	410'
70		700′	770′	840'	70′	140′	8001	475′
75		750′	825′	900′	75′	150′	900′	540′

- * Conventional Roads Only
- XX Taper lengths have been rounded off,
 L=Length of Taper(FT) W=Width of Offset(FT)
 S=Posted Speed(MPH)

TYPICAL USAGE								
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY				
	1	1						

- Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.
- For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

T.	TABLE 2								
Speed	Approximate distance between strips in an array								
≤ 40 MPH	10′								
> 40 MPH & ≤ 55 MPH	15′								
= 60 MPH	20′								
≥ 65 MPH	* 35′+								




TEMPORARY RUMBLE STRIPS

WZ (RS) -22

ILE: wzrs22.dgn	DN: Tx	DOT	ck: TxDOT	DW:	TxDOT	ск: TxDOT
CTxDOT November 2012	CONT	SECT	JOB		HI	GHWAY
REVISIONS	6450	25	001		ΙH	0030
2-14 1-22 4-16	DIST		COUNTY			SHEET NO.
4-16	18		DALLA	S		21

11

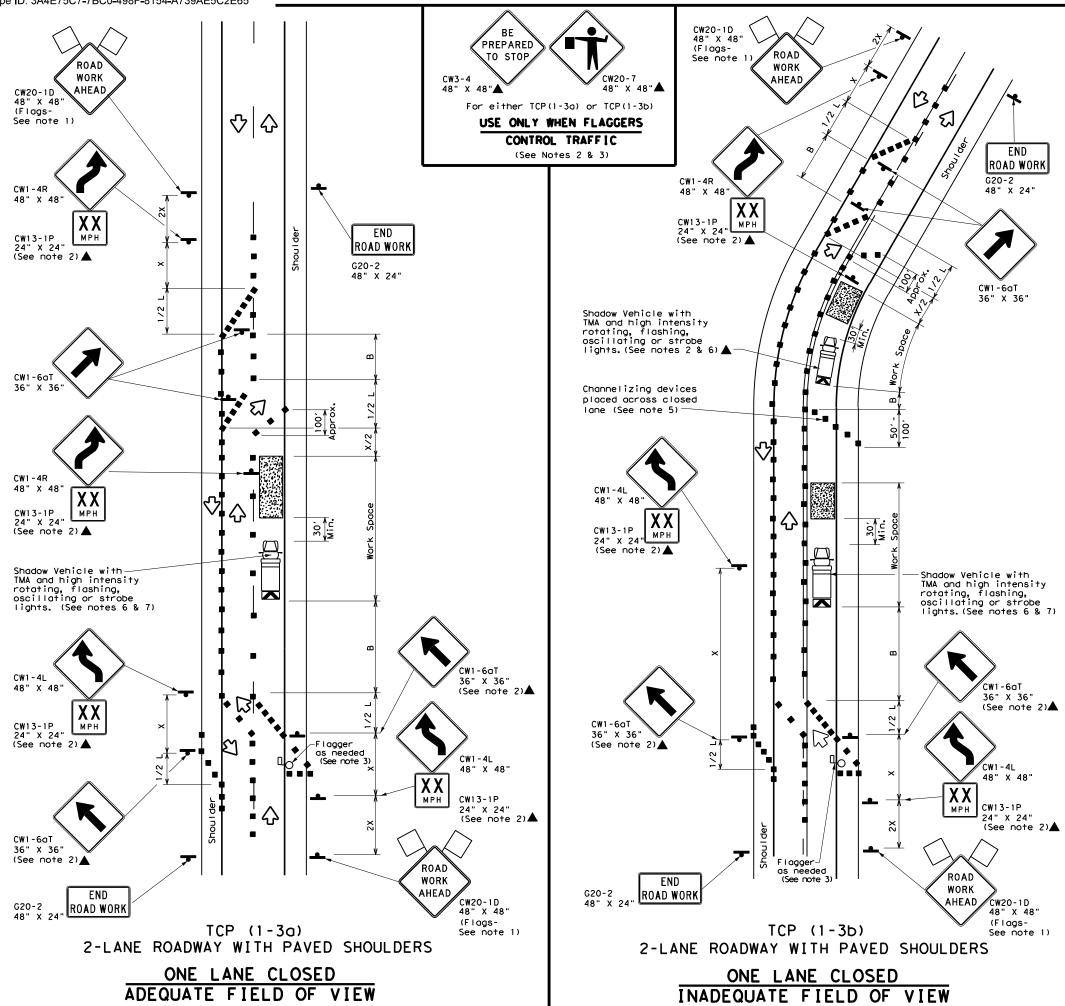

	LEGEND								
~~~	Type 3 Barricade		Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
<b>E</b>	Trailer Mounted Flashing Arrow Board	(M	Portable Changeable Message Sign (PCMS)						
•	Sign	♡	Traffic Flow						
$\Diamond$	Flag	Ф	Flagger						

Posted Speed <del>X</del>	Minimum Desirable Formula Taper Lengths  **		Spacir Channe Dev	lizing ices	Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space		
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"
30	WS ²	150′	1651	1801	30′	60'	120'	90'
35	L = WS	2051	2251	2451	35′	701	160′	120′
40	80	2651	295′	3201	40'	80'	240′	155′
45		450′	4951	540′	45′	90'	320′	195′
50		5001	550′	600'	50′	100'	400′	240′
55	L=WS	550′	6051	660′	55′	110′	500′	295′
60	L 113	600′	6601	7201	60′	120'	600′	350′
65		650′	715′	7801	65′	130′	7001	410′
70		700′	770′	840′	70'	140′	800'	475′
75		750′	8251	900′	75′	150′	900′	540′

- * Conventional Roads Only
- ** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE								
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY				
	1	1						

#### GENERAL NOTES

- 1. Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- Flagger control should NOT be used unless roadway conditions or heavy traffic volume require additional emphasis to safely control traffic. Additional flaggers may be positioned in advance of traffic queues to alert traffic to reduce speed.
- 4. DO NOT PASS, PASS WITH CARE and construction regulatory speed zone signs may be installed downstream of the ROAD WORK AHEAD signs.
- 5. When the work zone is made up of several work spaces, channelizing devices should be placed laterally across the closed lane to re-emphasize closure. Laterally placed channelizing devices should be repeated every 500 to 1000 feet in urban areas and every 1/4 to 1/2 mile in rural areas.
- 6. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- 8. Where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20', or 15' if posted speed are 35 mph or slower, and for tangent sections, at 1/2S where S is the speed in mph. This tighter device spacing is intended for the area of conflicting markings not the entire work zone.




Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
TRAFFIC SHIFTS ON
TWO LANE ROADS

TCP(1-3)-18

FILE: tcp1-3-18,dgn	DN:		CK:	DW:	CK:	
© TxDOT December 1985	CONT	SECT	JOB		HIGHWAY	
REVISIONS 2-94 4-98	6450	25	001		IH0030	
8-95 2-12	DIST		COUNTY		SHEET NO.	
1-97 2-18	18		DALLA	S	22	

15

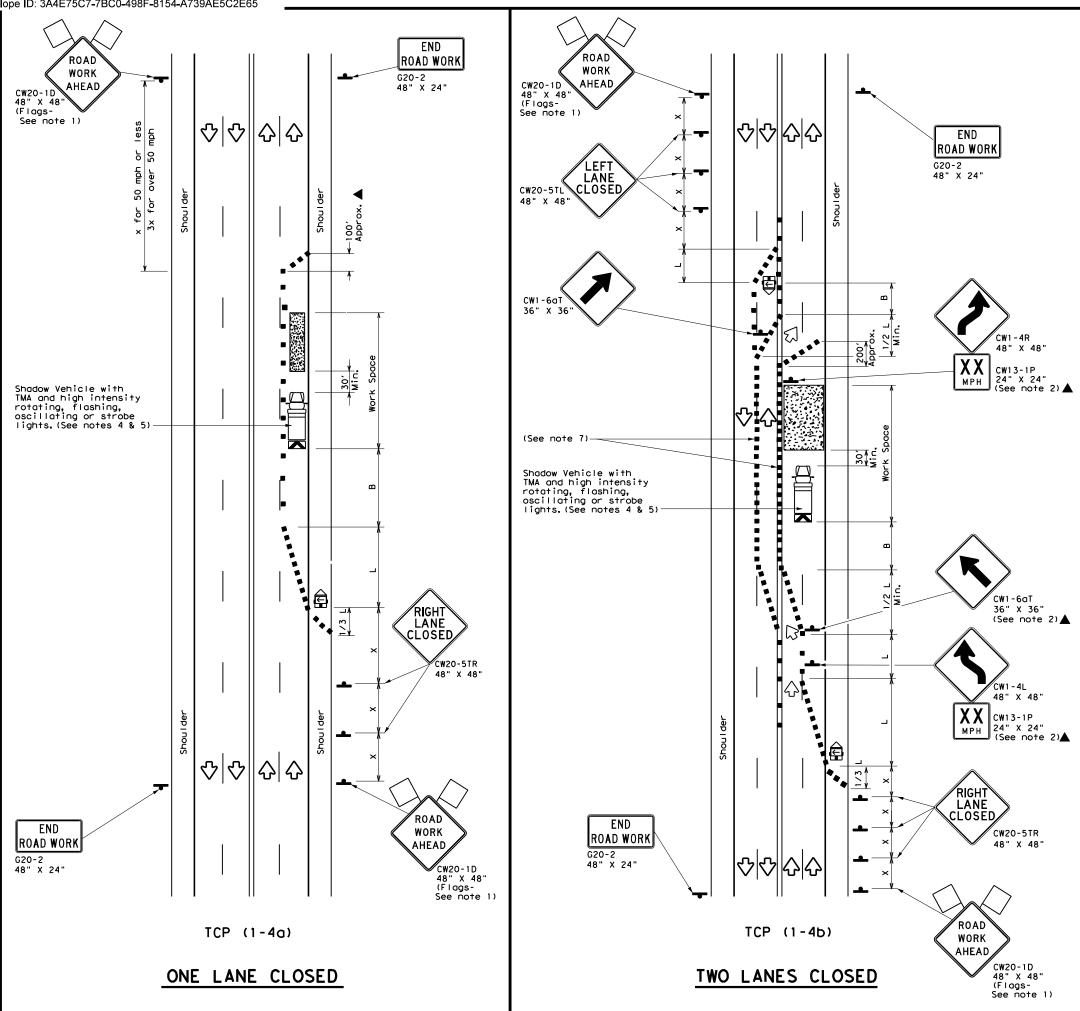

	LEGEND								
	Type 3 Barricade		Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
<b>E</b>	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)						
•	Sign	♡	Traffic Flow						
$\Diamond$	Flag	ЦO	Flagger						

Posted Speed	Speed		* *			d Maximum ng of lizing ices	Minimum Sign Spacing	Suggested Longitudinal Buffer Space	
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B" ·	
30	2	150′	165′	180′	30′	60′	120'	90′	
35	L= WS ²	2051	225'	245'	35′	70′	160′	120′	
40	80	265′	2951	3201	40′	80′	240'	155′	
45		450′	495′	540'	45′	90′	320′	195′	
50		5001	550′	600'	50′	100′	400′	240′	
55	L=WS	550′	605′	660′	55′	110′	500′	295′	
60	- "5	600′	660′	720′	60 <i>°</i>	120'	600,	350′	
65		650'	715′	780′	65′	130′	700′	410′	
70		700′	770′	840′	70′	140′	800′	475′	
75		750′	825′	9001	75′	150′	900'	540′	

- * Conventional Roads Only
- ₩ Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

	TYPICAL USAGE									
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY						
	1	1								

#### **GENERAL NOTES**

- 1. Flags attached to signs where shown are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer. 3. The CW20-1D "ROAD WORK AHEAD" sign may be repeated if the
- visibility of the work zone is less than 1500 feet.

  4. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- 5. Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.

6. If this TCP is used for a left lane closure , CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline where needed to protect the work space from opposing traffic with the arrow panel placed in the closed lane near the end of the merging taper.

7. Where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15' if posted speeds are 35 mph or slower, and for tangent sections, at 1/2S where S is the speed in mph. This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.



Traffic Operations Division Standard

TRAFFIC CONTROL PLAN LANE CLOSURES ON MULTILANE CONVENTIONAL ROADS

TCP(1-4)-18

FILE: tcp1-4-18.dgn	DN:		CK:	DW:	CK:	
© TxDOT December 1985	CONT	SECT	JOB		HIGHWAY	
2-94 4-98 REVISIONS	6450	25	5 001		IH0030	
8-95 2-12	DIST	COUNTY			SHEET NO.	
1-97 2-18	18		DALLA	S	23	

RIGHT LANE


RIGHT


LANE

ROAD

WORK

1 MILE

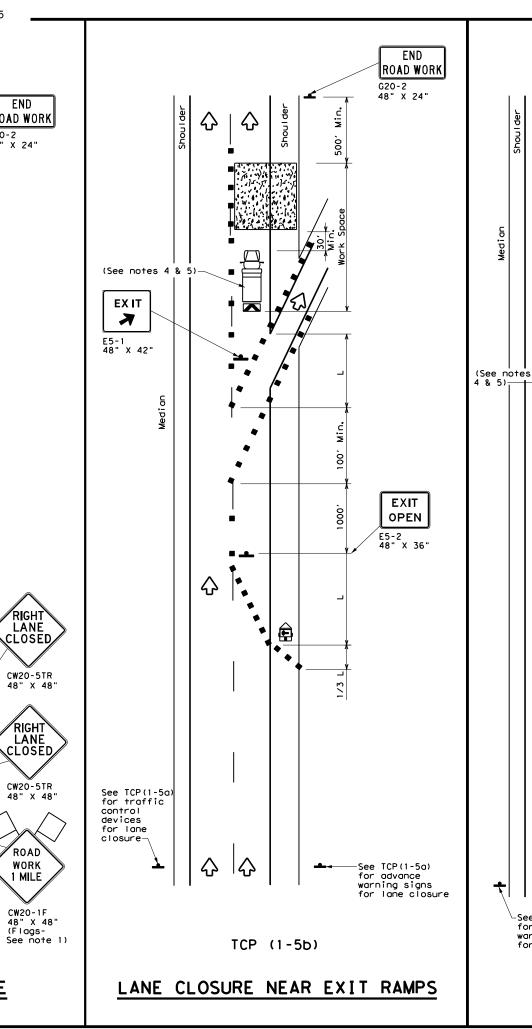



Posted Speed	Formula	* * *			Spacir Channe		Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"В"
30	_ <u>ws²</u>	150′	165′	180′	30′	60′	120′	90′
35	L = WS	2051	225′	245'	35′	70′	160′	120′
40	80	265′	295′	320′	40′	80′	240′	155′
45		450′	495′	540'	45′	90′	320′	195′
50		500′	5501	600'	50′	100′	400′	240′
55	L=WS	550′	605′	660′	55′	110'	500′	295′
60	L-#3	600'	660′	7201	60′	120'	600′	350′
65		650′	715′	780′	65′	130′	700′	410'
70		700′	770′	840'	70′	140'	800′	475′
75		750′	825′	900′	75′	150′	900′	540′

- * Conventional Roads Only
- XX Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

	TYPICAL USAGE									
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY						
		✓								

#### **GENERAL NOTES**

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- 3. Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
- 4. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

Texas Department of Transportation

Traffic Operations Division Standard

TRAFFIC CONTROL PLAN LANE CLOSURES FOR DIVIDED HIGHWAYS

TCP(1-5)-18

FILE: †c	DN:		CK:	DW:		CK:	
© TxD0T	February 2012	CONT	SECT	JOB		HIGHWAY	
2-18	REVISIONS	6450	25	001 I		ΙH	0030
2-10		DIST		COUNTY			SHEET NO.
		18		DALLA	S		24

-See TCP(1-5a) CLOSED for advance warning signs for lane closure AHEAD TCP (1-5c) CW2ORP-3D 48" X 48" LANE CLOSURE NEAR ENTRANCE RAMPS

RAMP

CLOSED

R11-2bT 48" X 30'

USE

NEXT

RAMP

CW25-1T 48" X 48"▲

Channelizing Devices at 20' spacing

See TCP(1-4a) for lane closure details if a lane closure is needed

to close a lane which is normally required to enter the ramp.

RAMP

END Road Work

**쇼 쇼** 

G20-2 48" X 24"

M:n.


公


公

 $\Diamond$ 

 $\Diamond$ 

公

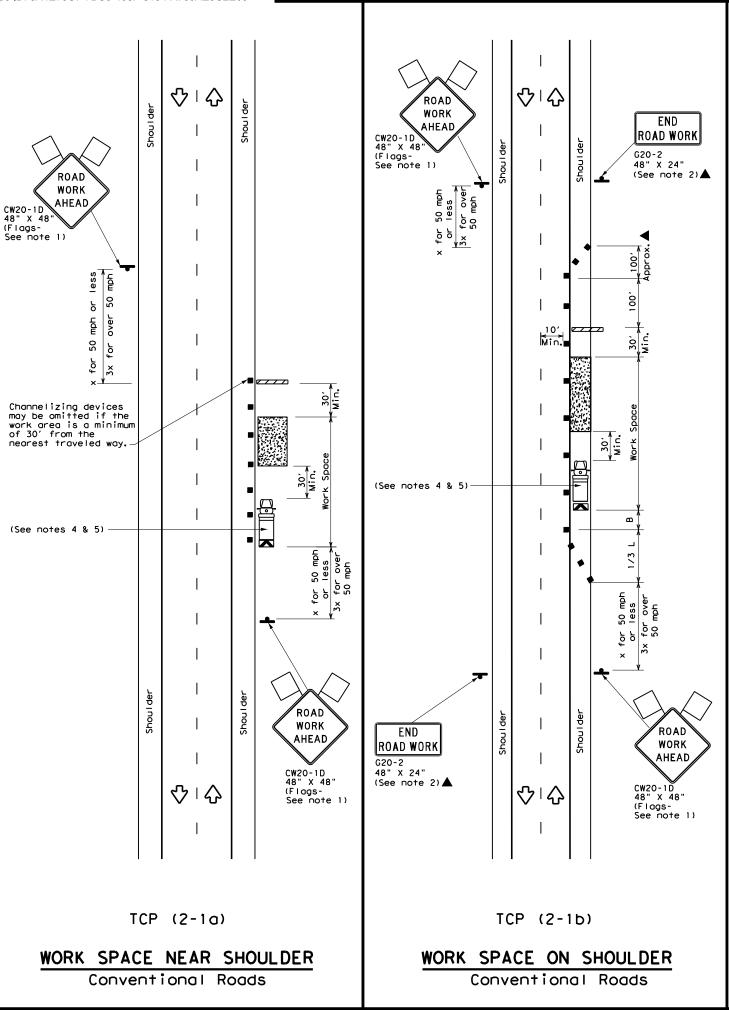

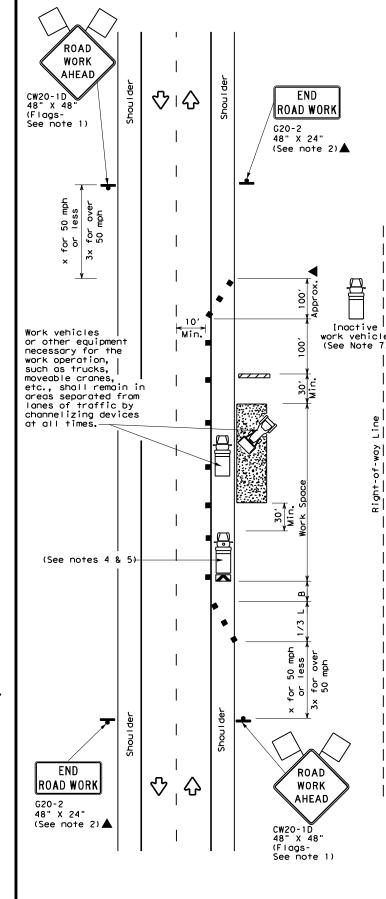

TCP (2-1c)

WORK VEHICLES ON SHOULDER

Conventional Roads

LEGEND Type 3 Barricade Channelizing Devices Truck Mounted Attenuator (TMA) Heavy Work Vehicle Portable Changeable Message Sign (PCMS) Trailer Mounted Flashing Arrow Board M Traffic Flow Sign  $\Diamond$ Flag Flagger

Posted Speed	Formula	**			Spacir Channe		Minimum Sign Spacing "x"	Suggested Longitudinal Buffer Space
*		10' Offset	10' 11' 12' On a On a ffset Offset Offset Taper Tangent		Distance	"B"		
30	2	150′	1651	1801	30'	60′	120′	90'
35	L = WS ²	2051	225′	245'	35′	70′	160′	120′
40	60	265'	295′	3201	40′	80′	240'	155′
45		450′	495′	540′	45′	90′	320'	195′
50		500'	550′	600'	50′	100′	400′	240′
55	L=WS	550′	605′	660′	55′	110′	500′	295′
60	- "5	600'	660′	720′	60′	120′	600′	350′
65		650′	715′	7801	65′	130′	700′	410′
70		7001	770′	840′	70′	140′	800′	475′
75		750′	825′	900'	75′	150′	900'	540′

- * Conventional Roads Only
- ** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

	TYPICAL USAGE								
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY					
	<b>√</b>	✓	<b>√</b>	✓					

#### **GENERAL NOTES**

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the plans, or for routine maintenance work, when approved by the Engineer
- 3. Stockpiled material should be placed a minimum of 30 feet from
- nearest traveled way.

  4. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- 5. Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space. 6. See TCP(5-1) for shoulder work on divided highways, expressways and
- 7. Inactive work vehicles or other equipment should be parked near the
- right-of-way line and not parked on the paved shoulder.
- 8. CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D 'ROAD WORK AHEAD" signs for shoulder work on conventional roadways.


Texas Department of Transportation

Traffic Operations Division Standard


TRAFFIC CONTROL PLAN CONVENTIONAL ROAD SHOULDER WORK

TCP(2-1)-18

ILE: †cp2-1-18.dgn	DN:		CK:	DW:		CK:
TxDOT December 1985	CONT	SECT	JOB		Н	IGHWAY
REVISIONS 2-94 4-98	6450	25	001	001 IH		10030
3-95 2-12	DIST		COUNTY			SHEET NO.
-97 2-18	18		DALLA	S		25

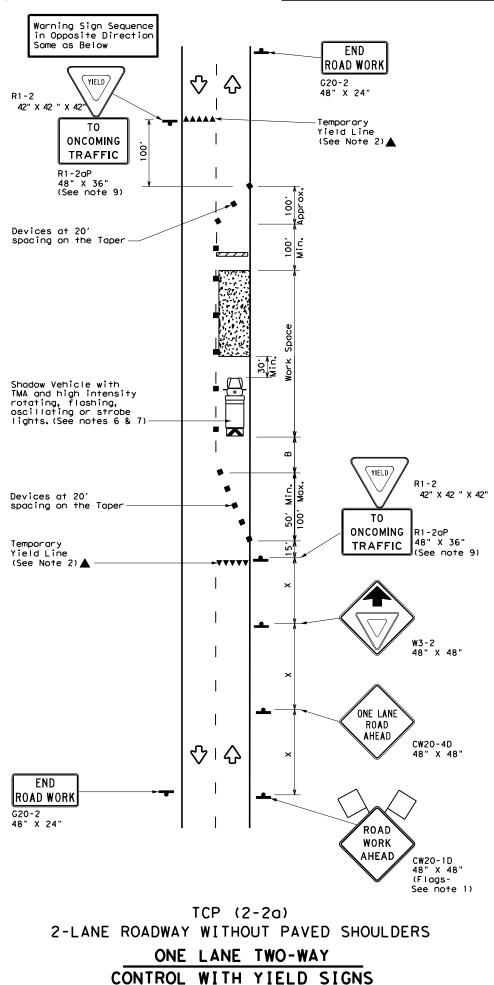

(Less than 2000 ADT - See Note 9)

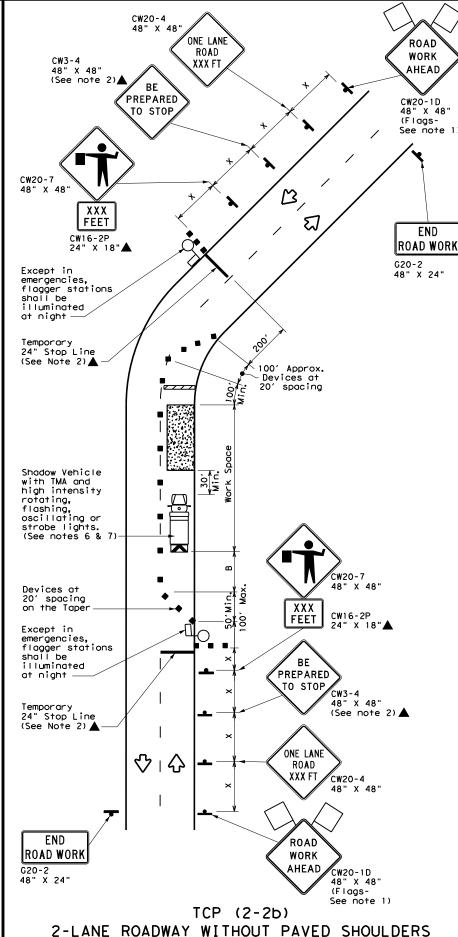

ONE LANE TWO-WAY

CONTROL WITH FLAGGERS

	LEGEND								
~~~	Type 3 Barricade		Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
E	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)						
-	Sign	♡	Traffic Flow						
\Diamond	Flag	Ф	Flagger						

Speed	Formula	D	Minimur esirab er Lend **	le	Spaci: Channe		Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space	Stopping Sight Distance
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"	
30	2	150′	165′	180′	30′	60′	120'	90′	200'
35	L = WS ²	2051	225'	245'	35′	70′	160′	120′	250′
40	80	265′	295′	3201	40'	80'	240'	1551	305′
45		450′	4951	540′	45′	90'	320'	195′	360′
50		5001	550′	600'	50'	100′	400′	240′	425′
55	L=WS	550′	6051	660,	55'	110'	500′	295′	495′
60	L "3	600′	660′	720'	60'	120'	600'	350'	570′
65		650′	715′	780′	65′	130′	700′	410′	645′
70		7001	770′	840′	70′	140′	800'	475′	730'
75		750′	8251	900'	75′	150′	900'	540′	820′

* Conventional Roads Only

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE										
MOBILE	MOBILE SHORT SHORT TERM INTERMEDIATE LONG TERM DURATION STATIONARY TERM STATIONARY STATIONARY									
	1									

GENERAL NOTES

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved
- 3. The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4 "ONE LANE ROAD XXX FT" sign, but proper sign spacing shall be maintained.
- Flaggers should use two-way radios or other methods of communication to control traffic.
- 5. Length of work space should be based on the ability of flaggers to communicate.
- 6. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- 7. Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.

TCP (2-2a)

- 8. The R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work space should be no longer than one half city block. In rural areas, roadways with less than 2000 ADT, work space should be no longer than 400 feet.
- 9. The R1-20P "YIELD TO ONCOMING TRAFFIC" sign shall be placed on a support at a 7 foot minimum mounting height.

TCP (2-2b)

- 10.Channelizing devices on the center line may be omitted when a pilot car is leading traffic and approved by the Engineer.
- 11. If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain stopping sight distance to the flagger and a queue of stopped vehicles.
- 12.Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situtations.




TRAFFIC CONTROL PLAN ONE-LANE TWO-WAY TRAFFIC CONTROL

TCP(2-2)-18

FILE: tcp2-2-18.dgn	DN:		CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB		HIGHWAY
8-95 3-03	6450	25	001		IH0030
1-97 2-12	DIST		COUNTY		SHEET NO.
4-98 2-18	18		DALLA	.S	26

Traffic Operations Division Standard

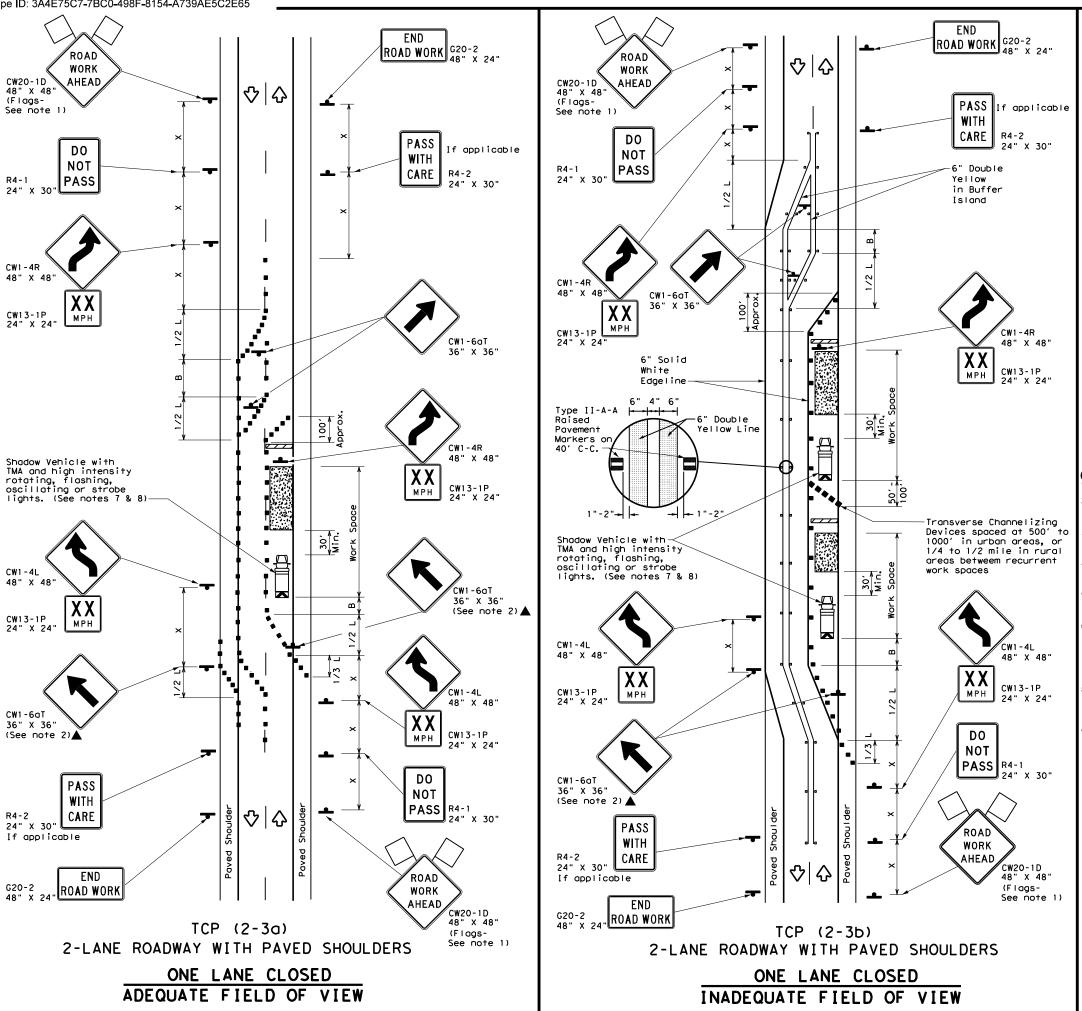

	LEGEND										
~~~	Type 3 Barricade		Channelizing Devices								
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)								
	Trailer Mounted Flashing Arrow Board	••••	Raised Pavement Markers Ty II-AA								
-	Sign	♡	Traffic Flow								
$\Diamond$	Flag	Ф	Flagger								

Posted Speed	Formula	D	Minimur esirab er Len **	le	Spacii Channe		Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"
30	2	150′	165′	180′	30′	60′	120′	90′
35	L = WS ²	2051	225′	245′	35′	70′	160′	120′
40	80	265′	295′	3201	40′	80′	240'	155′
45		4501	4951	540′	45′	90′	320′	195′
50		5001	550′	6001	50′	100′	400′	240′
55	L=WS	550′	6051	660′	55′	110′	500′	295′
60	" " "	600'	660′	7201	60′	120′	600′	350′
65		650′	715′	7801	65′	130'	700′	410'
70		700′	770′	840′	70′	140′	800′	475′
75		750′	8251	900'	75′	150′	900'	540′

* Conventional Roads Only

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

	TYPICAL USAGE										
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY							
				TCP (2-3b) ONLY							
			<b>√</b>	1							

#### GENERAL NOTES

1. Flags attached to signs where shown, are REQUIRED.

- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- When work space will be in place less than three days existing pavement markings may remain in place. Channelizing devices shall be used to separate
- Flagger control should NOT be used unless roadway conditions or heavy traffic volume require additional emphasis to safely control traffic. Flagger should be positioned at end of traffic queue. The R4-1 "DO NOT PASS," R4-2 " PASS WITH CARE" and construction
- regulatory speed zone signs may be installed within CW20-1D "ROAD WORK AHEAD" signs. Proper spacing of signs shall be maintained.
- Conflicting pavement marking shall be removed for long term projects.
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place. Type 3 Barricades or other channelizing devices may be substituted.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.

#### TCP (2-3a)

9. Conflicting pavement markings shall be removed for long-term projects. For shorter durations where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15' if posted speeds are 35 mph or slower, and for tangent sections, at 1/2(S) where S is the speed in mph. This tighter device spacing is intended for the area of the conflicting markings, not the entire work zone.



TRAFFIC CONTROL PLAN TRAFFIC SHIFTS ON

Traffic Safety Division Standard

TCP (2-3) -23

TWO-LANE ROADS

FILE: tcp(2-3)-23.dgn	DN:		CK:	DW:	CK:
© TxDOT April 2023	CONT	SECT	JOB		HIGHWAY
REVISIONS 12-85 4-98 2-18	6450	25	001		I H0030
8-95 3-03 4-23	DIST	COUNTY			SHEET NO.
1-97 2-12	18		DALLA	S	27

WORK

AHEAD

for 50 MPH or less 3x for over 50 MPH

CW20-1D

48" X 48' (Flags-

See note 1)

Shadow Vehicle with TMA and

high intensity rotating, flashing, oscillating or strobe lights. (See notes 5 & 6)


END ROAD WORK

G20-2 48" X 24"

」一

 $| \circlearrowleft | \circlearrowleft | \circlearrowleft | \circlearrowleft |$ 

TCP (2-4a)

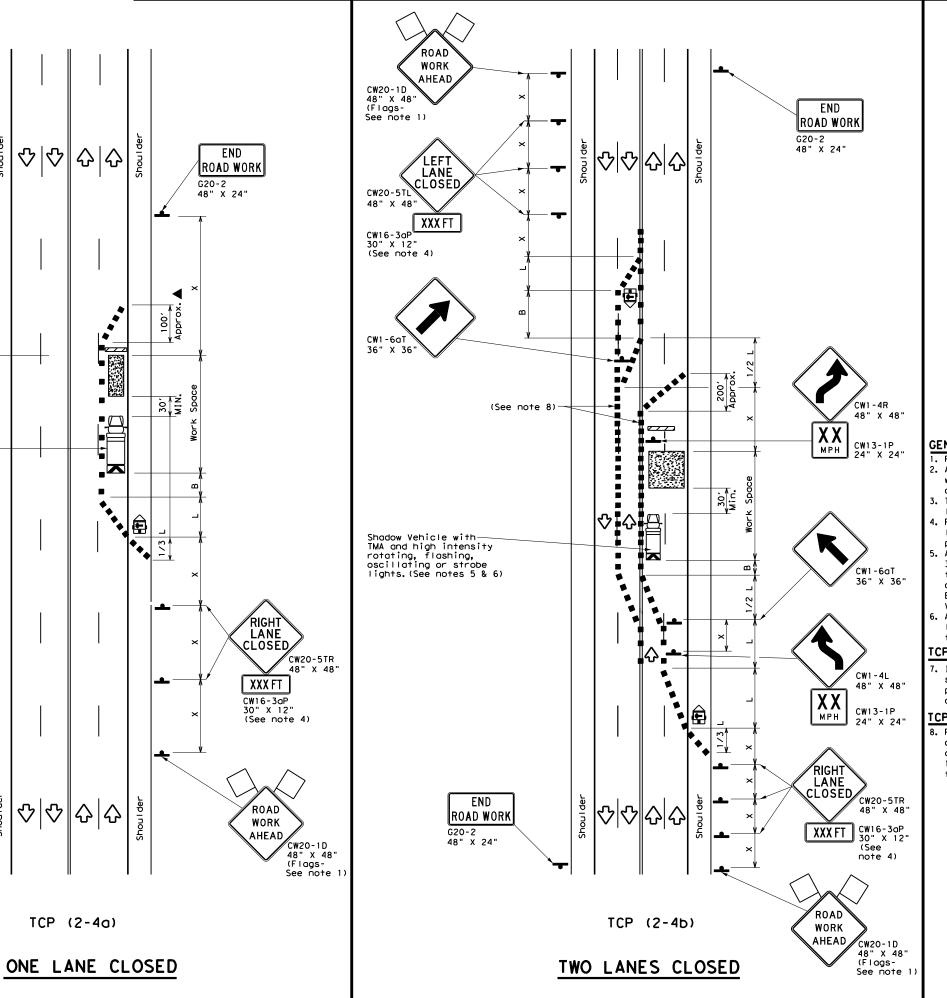

	LEGE	ND	
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
4	Sign	♡	Traffic Flow
$\Diamond$	Flag	<u>Б</u>	Flagger

Speed	Formula	D	Minimum Desirable Oper Lengths X X		Spacin Channe		Minimum Sign Spacing "X"	Suggested Longitudinal Buffer Space		
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"		
30	WS ²	150′	1651	180′	30′	60′	120'	90'		
35	L = WS	2051	225′	245′	35'	701	160′	120′		
40	80	265′	295′	320′	40`	80′	240'	155′		
45		450′	495′	540'	45′	90′	320'	195′		
50		5001	550′	6001	50′	1001	400'	240′		
55	L=WS	550′	6051	660′	55′	110′	500′	295′		
60	" " "	600'	660′	720′	60′	120′	600'	350′		
65		650′	715′	780′	65′	130′	700′	410′		
70		700′	770′	8401	70′	140′	800'	475′		
75		750′	825′	900′	75′	150′	900'	540′		

- * Conventional Roads Only
- ** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE											
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY							
		✓	<b>√</b>								

#### GENERAL NOTES

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- 3. The downstream taper is optional. When used, it should be 100 feet minimum length per lane.
- . For short term applications, when post mounted signs are not used, the distance legend may be shown on the sign face rather than on a CW16-3aP supplemental plaque.
- 5. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- . Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

#### CP (2-4a)

7. If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline to protect the work space from opposing traffic with the arrow board placed in the closed lane near the end of the merging taper.

#### CP (2-4b)

8. For shorter durations where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15' if posted speeds are 35 mph or slower, and for tangent sections, at 1/2(S) where S is the speed in mph. This tighter devices spacing is intended for the area of conflicting markings, not the entire work zone.




Traffic Operations Division Standard

TRAFFIC CONTROL PLAN LANE CLOSURES ON MULTILANE CONVENTIONAL ROADS

TCP(2-4)-18

FILE: tcp2-4-18.dgn	DN:		CK:	DW:		CK:
© TxDOT December 1985	CONT	SECT	JOB		ΗI	SHWAY
8-95 3-03 REVISIONS	6450	25	001		ΙH	0030
1-97 2-12	DIST	IST COUNTY				SHEET NO.
4-98 2-18	18		DALLA	S		28

No warranty of any for the conversion amsits.yesm

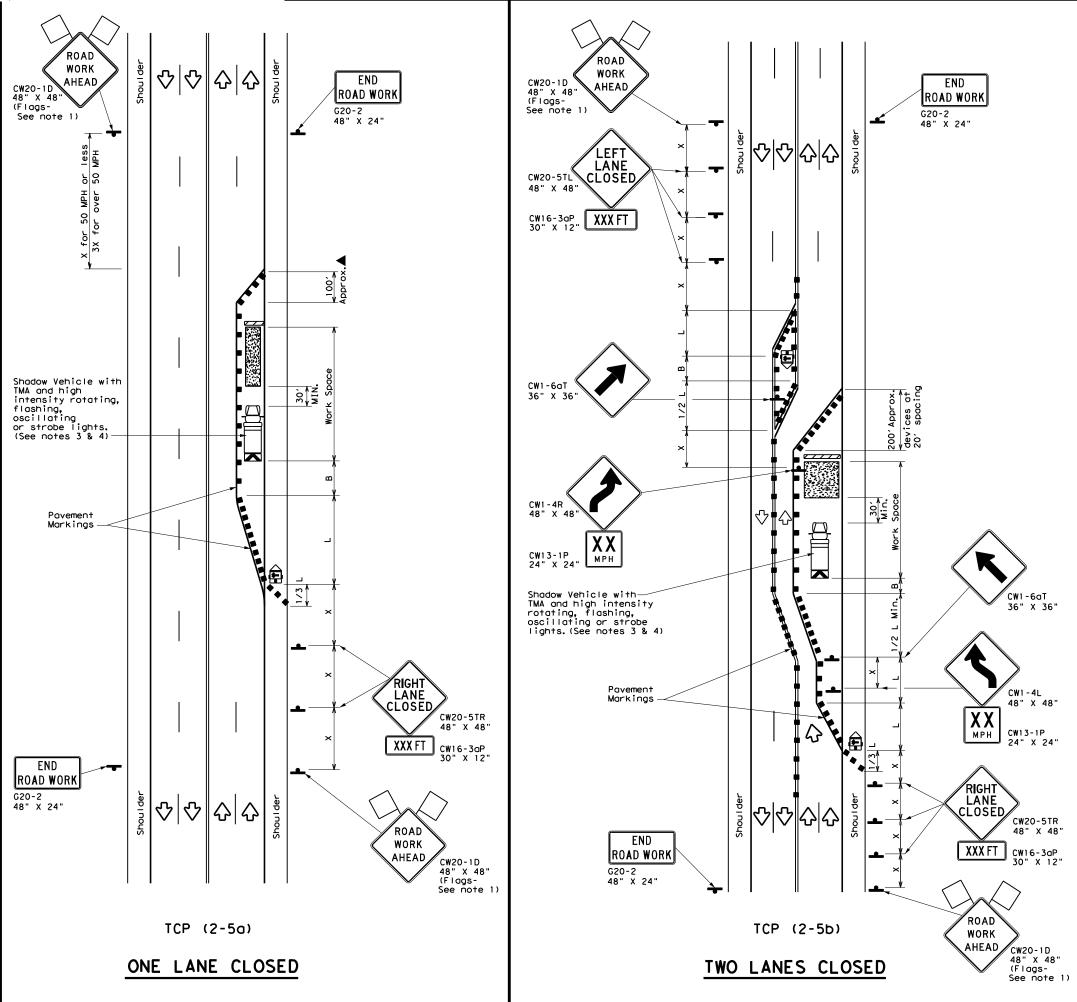

	LEGEND									
~~~	Type 3 Barricade		Channelizing Devices							
	Heavy Work Vehicle	K	Truck Mounted Attenuator (TMA)							
₽	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)							
-	Sign	♡	Traffic Flow							
\Diamond	Flag	4	Flagger							

Posted Speed	Formula	D	Minimur esirab er Len **	le	Spacii Channe		Minimum Sign Spacing "x"	Suggested Longitudinal Buffer Space
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"
30	, <u>ws²</u>	150′	1651	180'	30′	60′	120′	90′
35	L = WS	2051	225′	245'	35′	70′	160′	120′
40	60	265′	295′	3201	40′	80′	240′	155′
45		450′	495′	5401	45′	90′	320′	195′
50		500′	5501	6001	50 <i>°</i>	100′	400′	240′
55	L=WS	550′	6051	660′	55′	110′	500′	295′
60	L 113	600′	660′	720′	60′	120′	600′	350′
65		650′	715′	7801	65′	130′	700′	410′
70		700′	770′	840'	70′	140′	800′	475′
75		750′	8251	9001	75′	150′	900'	540′

- * Conventional Roads Only
- $\fill \fill \fil$

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE									
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY					
			√	1					

GENERAL NOTES

- 1. Flags attached to signs where shown, are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- 3. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew eposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 4. Additional Shadow Vehicles with TMAs may be positioned in each
- closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.
- The downstream taper is optional. When used, it should be 100 feet approximately per lane, with channelizing devices spaced at 20 feet.

TCP (2-5a)

6. If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline to protect the work space from opposing traffic, with the arrow board placed in the closed lane near the end of the merging taper.

TCP (2-5b)

7. Conflicting pavement markings shall be removed for long-term projects.



Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
LONG TERM LANE CLOSURES
MULTILANE CONVENTIONAL RDS.

TCP(2-5)-18

FILE: tcp2-5-18.dgn	DN:		CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB		HIGHWAY
8-95 2-12 REVISIONS	6450	25	001		I H0030
1-97 3-03	DIST		COUNTY		SHEET NO.
4-98 2-18	18		DALLA	S	29

165

 \Diamond

 \Diamond

 \Diamond

 \Diamond

TCP (2-6a)

ONE LANE CLOSURE

END

ROAD WORK G20-2 48" X 24"

CLOSED

1000 FT

CW16-3aP 30" X 12'

RIGHT

LANE


CLOSED


CW16-3aP 30" X 12

ROAD

WORK

1 MILE

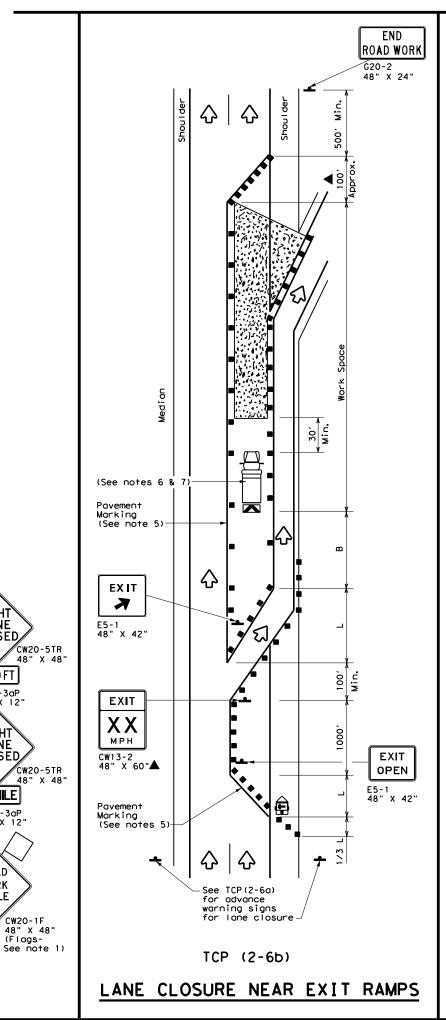

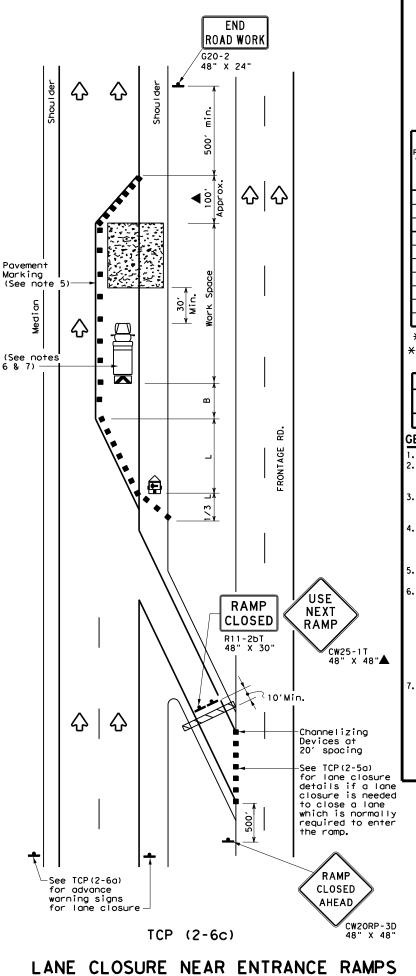

	LEGEND								
	Type 3 Barricade		Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
	Trailer Mounted Flashing Arrow Board	(M	Portable Changeable Message Sign (PCMS)						
-	Sign	♡	Traffic Flow						
\Diamond	Flag	Ф	Flagger						

Speed	Minimum Desirable Formula Taper Lengths ***		le	Spacin Channe		Minimum Sign Spacing "x"	Suggested Longitudinal Buffer Space	
*		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	Distance	"B"
30	ws ²	150′	1651	180′	30′	60′	1201	90′
35	L = WS 60	2051	225′	245'	35′	70′	160′	120′
40	80	265′	295′	3201	40′	80'	240'	155′
45		450'	495′	540'	45′	90'	320'	195′
50		5001	550′	600'	50′	100′	4001	240′
55	L=WS	550′	605′	660′	55′	110'	500′	295′
60	L-#3	600'	660'	720'	60′	120'	6001	350′
65		650′	715′	780′	65′	130′	700′	410′
70		700′	770′	8401	70′	140′	800′	475′
75		750′	8251	900'	75′	150'	900'	540′

- **X Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE									
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY					
			1	1					

GENERAL NOTES

- 1. Flags attached to signs where shown, are REQUIRED. 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer
- Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
- Channelizing devices used along the work space or along tangent sections may be supplemented with vertical panels (VP) placed on everyother channelizing device. If night time conditions make it difficult to see at least two VPs, the VPs may be placed on each channelizing device.
- The placement of pavement markings may be omitted on Intermediate-term stationary work zones with the approval of the Engineer.
- Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the
- Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.


Texas Department of Transportation

Traffic Operations Division Standard

TRAFFIC CONTROL PLAN LANE CLOSURES ON DIVIDED HIGHWAYS

TCP(2-6)-18

FILE: tcp2-6-18.dgn				CK:	DW:		CK:
C TxDOT	December 1985	CONT	SECT	JOB		нІС	CHWAY
2-94 4-98	6450	25	001		ΙH	0030	
8-95 2-12		DIST	DIST COUNTY				SHEET NO.
1-97 2-1	3	18		DALLA	S		30

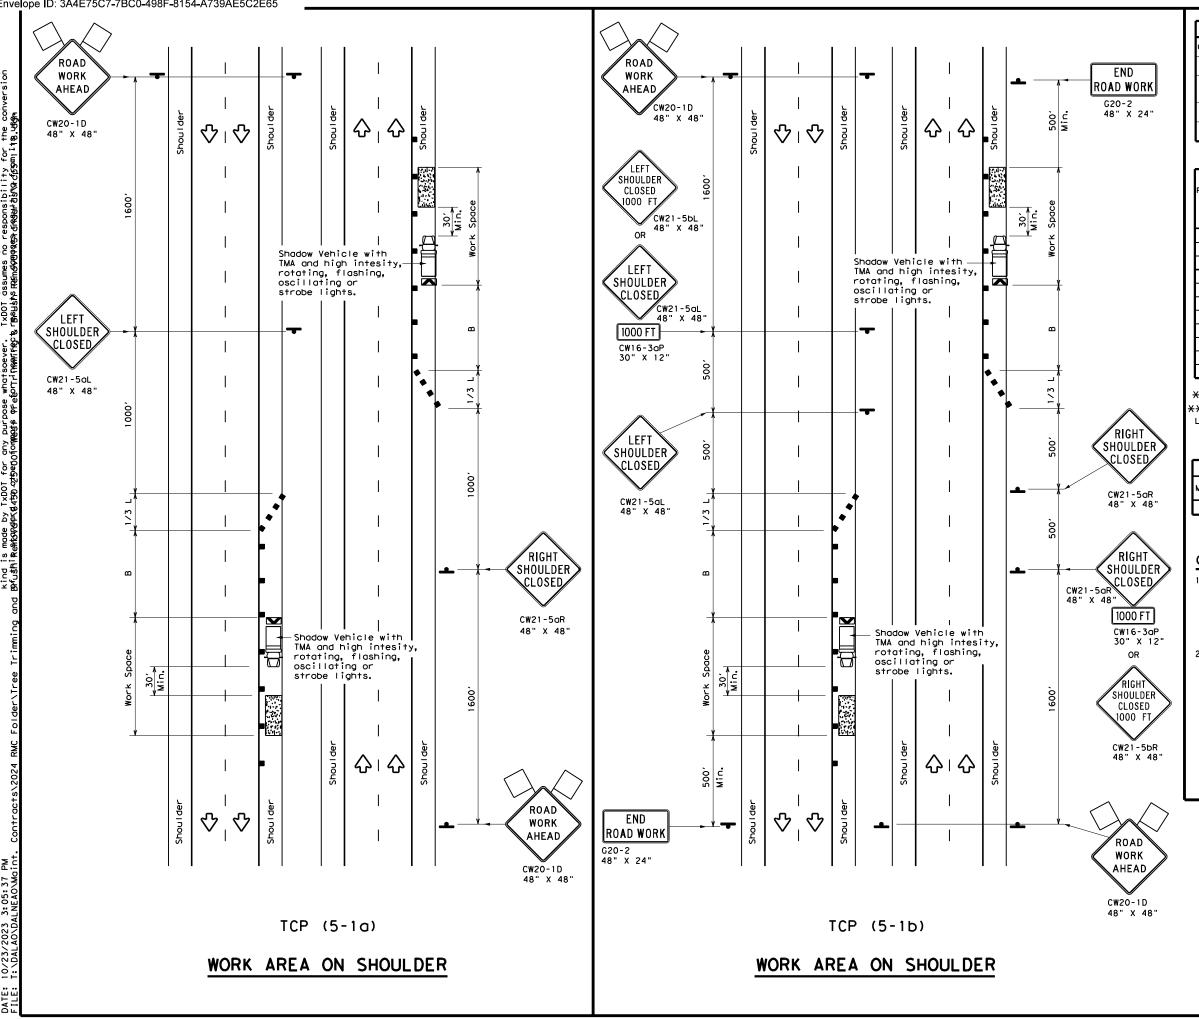

	LEGEND								
~~~	Type 3 Barricade		Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)						
-	Sign	♡	Traffic Flow						
$\Diamond$	Flag	Ц	Flagger						

Posted Speed *	Formula	D Tap	Minimur esirab er Len **	le gths	Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space
^		10′ Offset	11' Offset	12' Offset	On a Taper	On a Tangent	"B"
30	WS ²	150′	1651	1801	30′	60′	90′
35	L = WS	2051	2251	245'	35′	70′	120'
40	80	265′	2951	320'	40′	80′	155′
45		450'	4951	540'	45′	90′	195′
50		500′	5501	6001	50′	100′	240'
55	L=WS	550′	6051	660′	55′	110′	295′
60	L-113	600'	660′	7201	60′	120′	350′
65		650′	715′	780′	65′	130′	410'
70		700′	770′	840′	70′	140′	475′
75		750′	8251	900′	75′	150′	540′
80		800′	880′	960′	80′	160′	615′

- * Conventional Roads Only
- XXTaper lengths have been rounded off.
- L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH

	TYPICAL USAGE										
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY							
	TCP(5-1a) TCP(5-1b) TCP(5-1b)										

#### GENERAL NOTES

- 1. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30' to 100' in advance of the area of crew exposure without adversely effecting the performance or quality of the work. Type 3 barricades or drums may be substituted when workers on foot are no longer present when approved by the Engineer.
- 2. 28" tall or taller one-piece cones will be allowed only for Short Duration or Short Term stationary operations when workers are present to maintain the devices upright and in proper location. Intermediate Term stationary work areas should use Drums, Vertical Panels or 42" tall two-piece




Traffic Operations Division Standard

TRAFFIC CONTROL PLAN SHOULDER WORK FOR FREEWAYS / EXPRESSWAYS

TCP (5-1)-18

FILE:	tcp5-1-18.dgn		DN: CK: DW:		DW:	CK:		
C TxD0T	February 2	2012	CONT	SECT	JOB		HIGHWAY	
REVISIONS 2-18			6450	25	001		I H00	30
			DIST		COUNTY		SHEE	T NO.
			18		ΠΔΙΙΔ	S	1	<b>₹ 1</b>

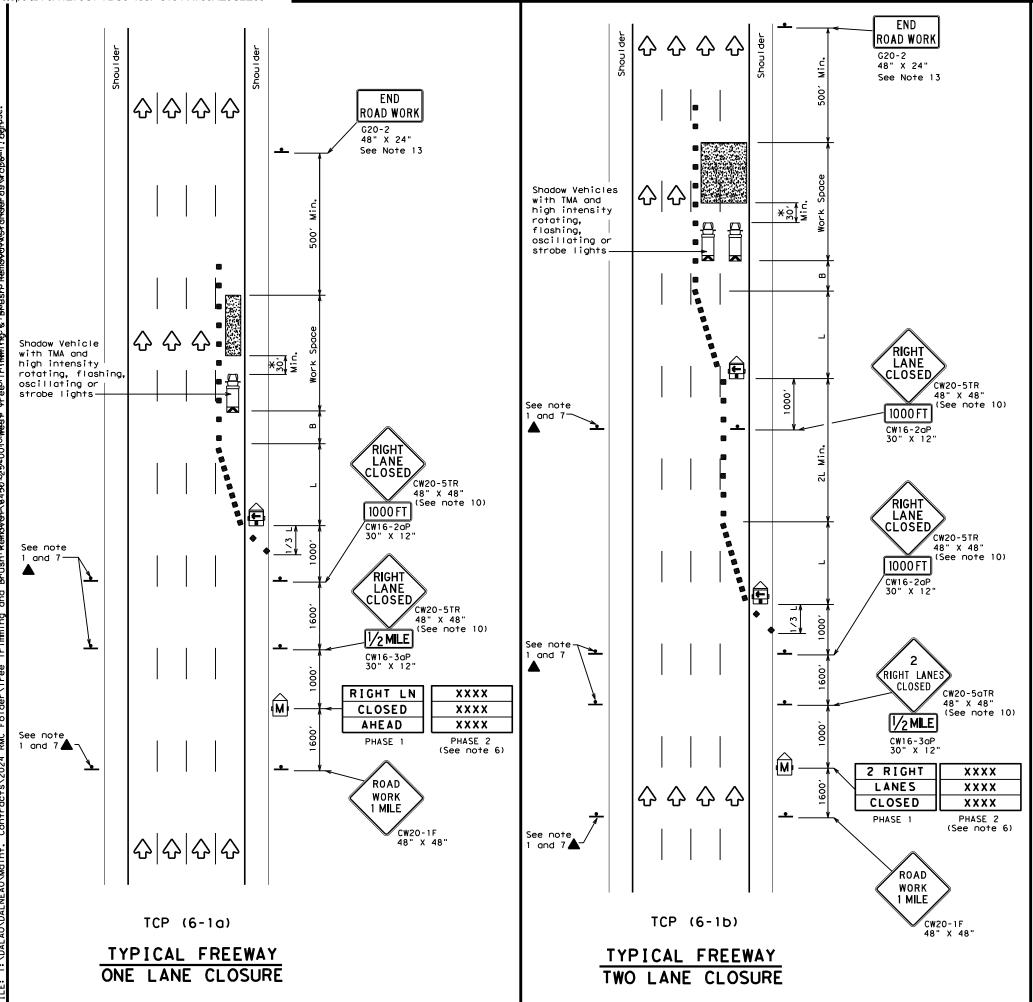

	LEGEND								
~~~~	Type 3 Barricade	8 8	Channelizing Devices						
	Heavy Work Vehicle	K	Truck Mounted Attenuator (TMA)						
E	Trailer Mounted Flashing Arrow Board	(M	Portable Changeable Message Sign (PCMS)						
•	Sign	∿	Traffic Flow						
\Diamond	Flag	П	Flagger						

Posted Speed	Formula	D	Minimur esirab Lengtl **	le	Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	"B"
45		450′	4951	540′	45'	90′	195′
50		5001	550′	6001	50'	100'	240′
55	L=WS	550′	605′	660′	55'	110′	295′
60	- "3	600′	660′	720′	60′	120'	350′
65		650′	715′	780′	65′	130′	410′
70		700′	770′	840′	701	140'	475′
75		750′	825′	9001	75'	150′	540′
80		8001	880′	9601	80,	160′	615′

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE									
MOBILE	MOBILE SHORT SHORT TERM INTERMEDIATE LONG TERM DURATION STATIONARY TERM STATIONARY STATIONARY								

GENERAL NOTES

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- 2. Drums or 42"cones are the typical channelizing devices. For Intermediate Term Stationary work, drums shall be used on tapers with drums or 42" cones used on tangent sections. Other channelizing devices may be used as directed by the Engineer.
- All construction signs and barricades placed during any phase of work shall remain in place until removal is approved by the Engineer.
- The Engineer may direct the Contractor to furnish additional signs and barricades as required to maintain traffic flow, detours and motorist safety during construction.
- 5. Static message boards or changeable message signs stating the date and duration of ramp or freeway lane closures shall be placed a minimum of seven (7) calendar days in advance of the actual closure.
- 6. Phase 2 of the PCMS message should include appropriate information formatted as shown on BC(6), such as "MERGE LEFT," recommended advisory speed, delay information, or other specific warnings.
- 7. Duplicate construction warning signs should be erected on the medians side of freeways where median width will permit and traffic volume justifies the signing.
- The number of closed lanes may be increased provided the spacing of traffic control devices, taper lengths and tangent lengths meet the requirements of the TMUTCD.
- Warning signs for intermediate term stationary work should be mounted at 7' to the bottom of the sign.
- 10. Warning signs shown shall be appropriately altered for left lane closures. When signs are mounted at 1' height for short term stationary or short duration work, sign versions shown in the SHSD for Texas with distances on the sign face rather than mounted on a plaque below the sign may be used.
- 11. When possible, PCMS units should be located in advance of the last available exit ramp prior to the lane closure to allow motorists an alternate route. They may also be relocated to improve advance warning in case of unanticipated queuing or congestion.
- 12. For Intermediate Term Stationary work at night, floodlights should be used to illuminate the work area and equipment crossings. Floodlights shall not produce a disabling glare condition for road users or workers.
- 13. The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.


A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.



TRAFFIC CONTROL PLAN FREEWAY LANE CLOSURES

TCP(6-1)-12

FILE:	tcp6-1.dgn	DN: T	<dot< th=""><th>ck: TxDOT</th><th>DW:</th><th>TxDOT</th><th>ck: TxDOT</th></dot<>	ck: TxDOT	DW:	TxDOT	ck: TxDOT
C TxD0T	February 1998	CONT	SECT	JOB HIGH		IGHWAY	
8-12	REVISIONS	6450	25	001		I	10030
0-12		DIST		COUNTY			SHEET NO.
		18		DALLA	S		32

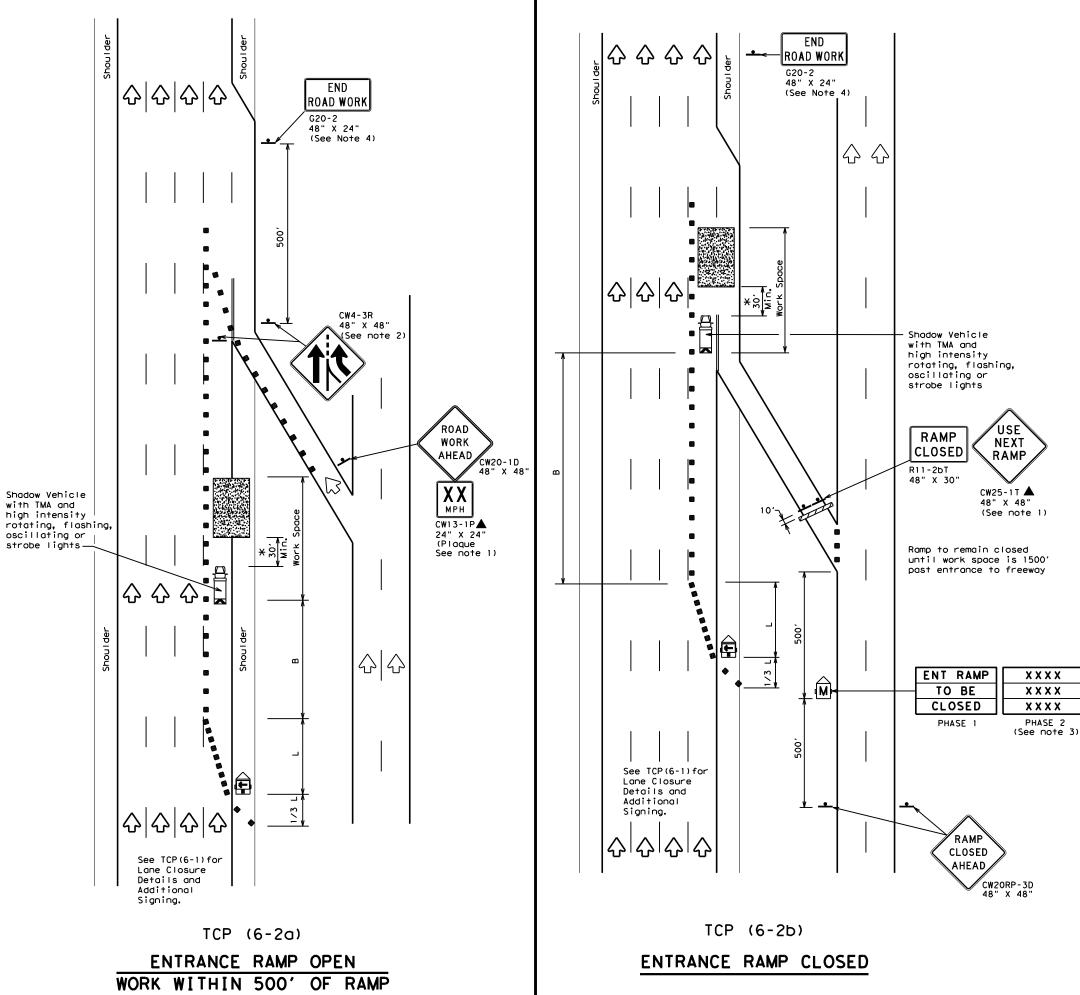

	LEGEND									
~~~	Type 3 Barricade	00	Channelizing Devices							
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)							
<b>E</b>	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)							
-	Sign	♡	Traffic Flow							
$\Diamond$	Flag	Ф	Flagger							

Posted Speed	Formula	D	Minimum esirab Length **	le	Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	"B"
45		450′	495′	540'	45′	90′	195′
50		500′	550′	6001	50′	100′	240′
55	L=WS	550′	605′	660′	55′	110'	295′
60	L-#3	600'	660′	720′	60′	120′	350′
65		650′	715′	780′	65 <i>°</i>	130'	410'
70		700′	770′	840′	701	140′	475′
75		750′	825′	9001	75′	150′	540′
80		800'	880′	9601	80′	160'	615′

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE									
MOBILE	MOBILE SHORT SHORT TERM INTERMEDIATE LONG TERM DURATION STATIONARY TERM STATIONARY STATIONARY								
	1	1	1						

#### **GENERAL NOTES**

- 1. All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- 2. ADDED LANE Symbol (CW4-3) sign may be omitted when sign
- between ramp and mainlane can be seen from both roadways.

  3. See "Advance Notice List" on BC(6) for recommended date
- and time formatting options for PCMS Phase 2 message.
  4. The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

**X**A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.


Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.



# TRAFFIC CONTROL PLAN WORK AREA NEAR RAMP

TCP (6-2) -12

FILE:	tcp6-2.dgn	DN: T:	xDOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
© TxD0T	TXDOT February 1994 CONT SECT JOB HIG		SHWAY				
		6450	25 001		IHO	IH0030	
1-97 8-98 4-98 8-12		DIST		COUNTY			SHEET NO.
		18		DALLA	S		77

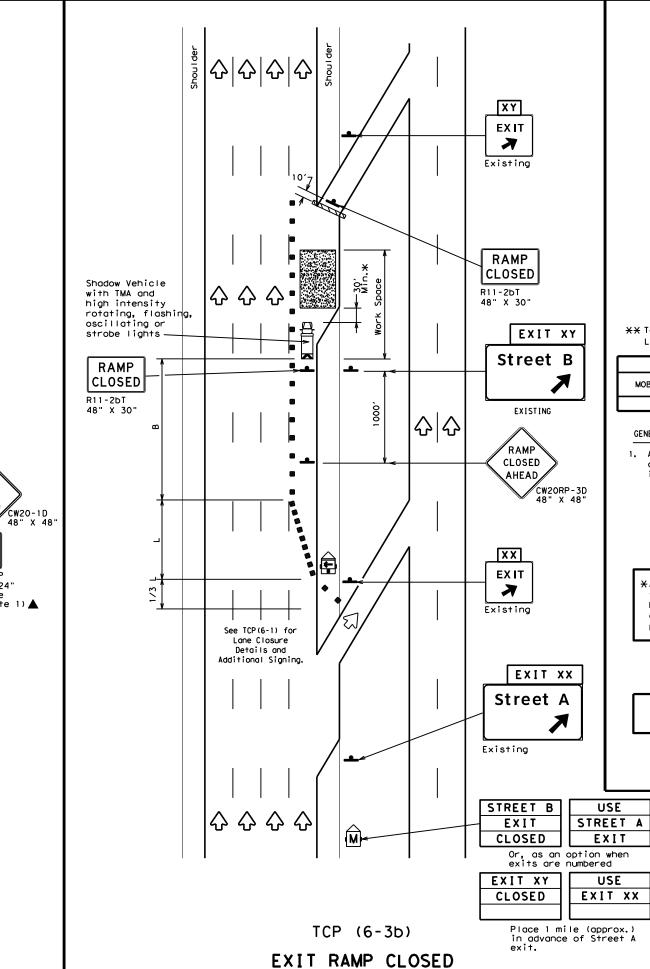

TRAFFIC EXITS PRIOR TO CLOSED

	LEGEND								
~~~	Type 3 Barricade	0 0	Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
₽	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)						
-	Sign	♡	Traffic Flow						
\Diamond	Flag	ГО	Flagger						

Posted Speed	Formula	Minimum Desirable Taper Lengths "L" **			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	"B"
45		450′	495′	540′	45′	90′	195′
50		5001	550′	600′	50′	1001	240′
55	L=WS	550′	605′	660′	55′	110′	295′
60	L-#3	600′	660′	720′	60′	1201	350′
65		650′	715′	780′	65′	130′	410′
70		700′	770′	840′	70′	140′	475′
75		750′	825′	900′	75′	150′	540′
80		800'	8801	960'	80′	160'	615′

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MP

	TYPICAL USAGE									
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY						
	1	√	√							

GENERAL NOTES:

1. All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere

*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work


Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.


> ₹ Texas Department of Transportation Traffic Operations Division Standard

TRAFFIC CONTROL PLAN WORK AREA BEYOND RAMP

TCP (6-3) -12

		-	_			_	
LE:	tcp6-3.dgn	DN: T	<dot< td=""><td>ck: TxDOT</td><td>DW:</td><td>TxDOT</td><td>ck: TxDOT</td></dot<>	ck: TxDOT	DW:	TxDOT	ck: TxDOT
TxD0T	February 1994	CONT	SECT	JOB		HIO	SHWAY
	REVISIONS	6450	25	001		IHO	0030
-97 8-98 -98 8-12		DIST		COUNTY			SHEET NO.
98 8-12		18		DALLA	S		34

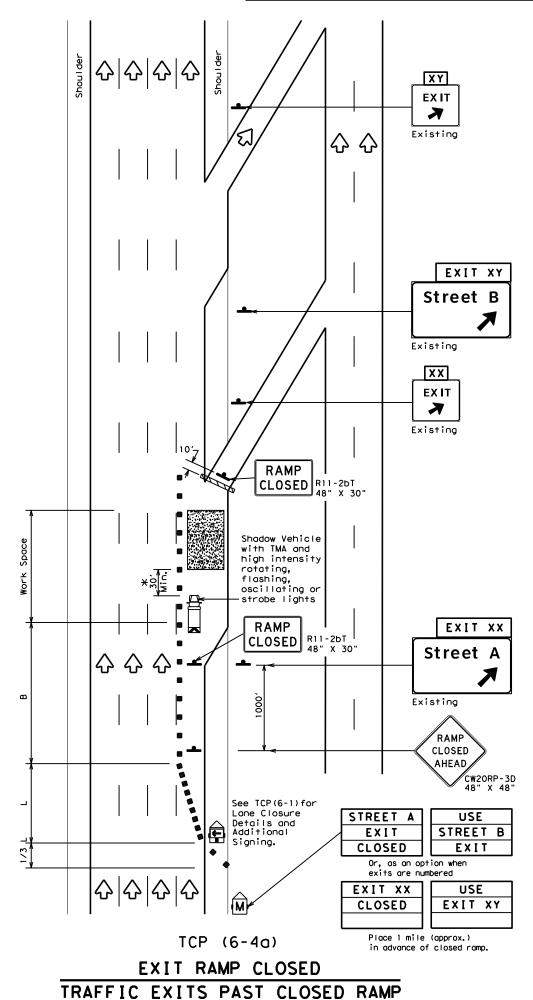

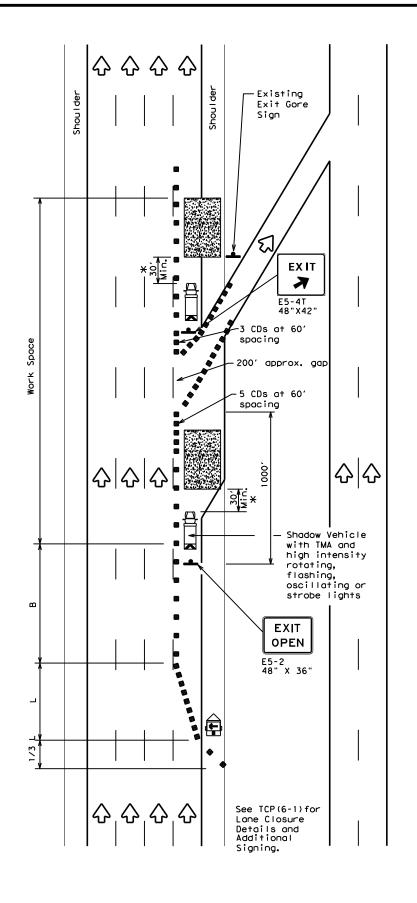

TCP (6-4b)

EXIT RAMP OPEN

	LEGEND								
· / / / /	Type 3 Barricade		Channelizing Devices (CDs)						
	Heavy Work Vehicle	K	Truck Mounted Attenuator (TMA)						
₽	Trailer Mounted Flashing Arrow Board	₹	Portable Changeable Message Sign (PCMS)						
-	Sign	♡	Traffic Flow						
\Diamond	Flag	9	Flagger						
	•		•						

Posted Speed	Formula	D	Minimum esirab Length **	le	Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	"B"
45		450′	495′	540'	45′	90'	195′
50		500′	550′	6001	50′	100'	240′
55	L=WS	550′	605′	660′	55′	110′	295′
60	L-W3	600'	660′	720′	60′	120'	350′
65		650′	715′	780′	65′	130′	410'
70		700′	770′	840′	701	140′	475′
75		750′	825′	900′	75′	150′	540′
80		8001	880′	960′	80′	160′	615′

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE							
MOBILE SHORT DURATION		SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY			
	1	1	1				

GENERAL NOTES

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- 2. See BC Standards for sign details.

*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.


Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.



TRAFFIC CONTROL PLAN
WORK AREA AT EXIT RAMP

TCP (6-4) -12

			_	- •		_	
FILE:	tcp6-4.dgn	DN: T	<dot< td=""><td>ck: TxDOT</td><td>DW:</td><td>T×DOT</td><td>ск: TxDOT</td></dot<>	ck: TxDOT	DW:	T×DOT	ск: TxDOT
©TxD0T Feburary 1994		CONT	SECT JOB		HIGHWAY		
	REVISIONS	6450	25	001		IΗ	0030
1-97 8-98		DIST	COUNTY			SHEET NO.	
4-98 8-1	2	18		DALLA	S		35

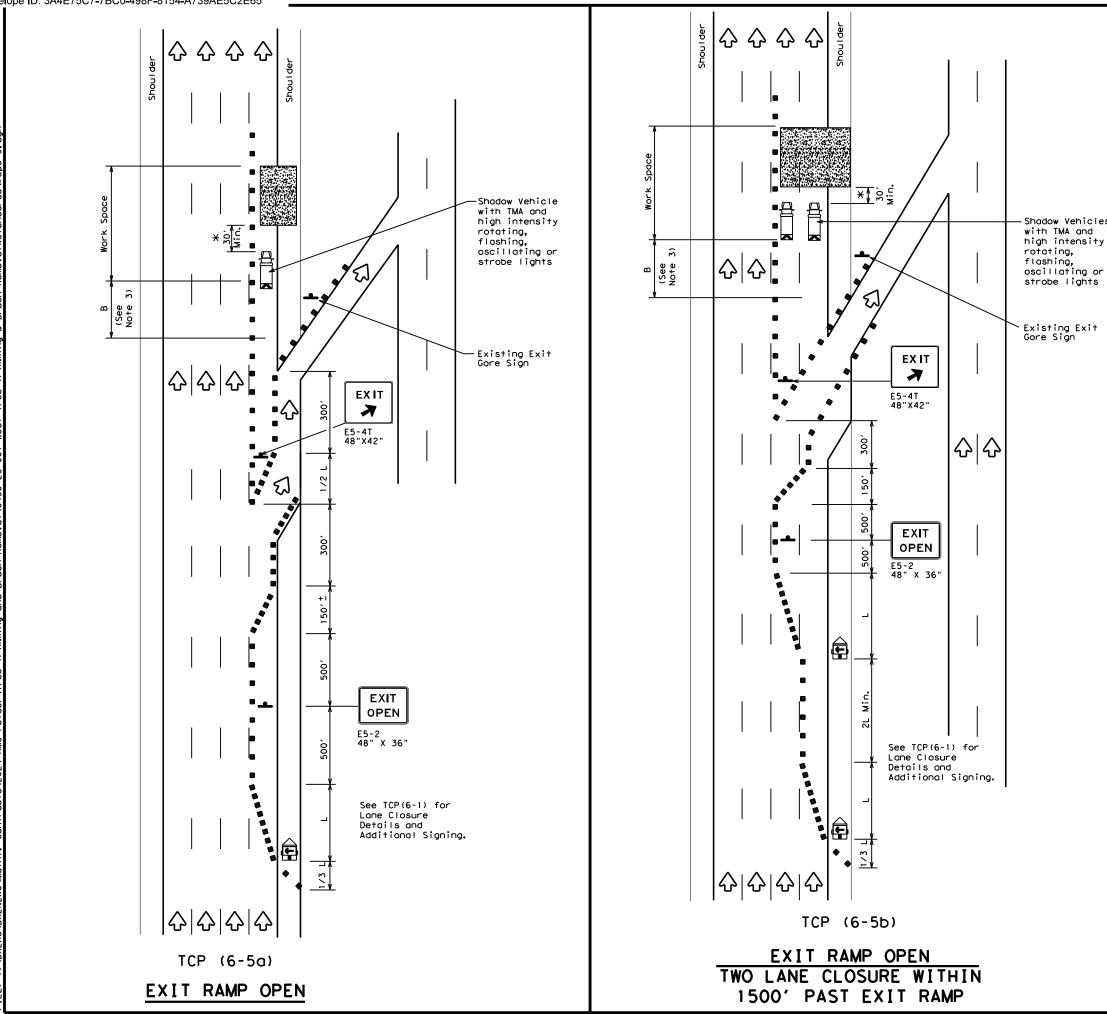

	LEGEND								
~~~	Type 3 Barricade	00	Channelizing Devices						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
<b>£</b>	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)						
-	Sign	♡	Traffic Flow						
$\Diamond$	Flag	Ф	Flagger						

Posted Speed	Formula	Minimum Desirable Taper Lengths "L" **			Spacii Channe		Suggested Longitudinal Buffer Space
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	"B"
45		450′	4951	540'	45′	90'	195′
50		5001	550′	6001	50′	100′	240′
55	L=WS	5501	605′	660′	55′	110'	295′
60	L-#3	600'	660′	720′	60′	120′	350′
65		650′	715′	780′	65′	130′	410'
70		700′	770′	840′	701	140′	475′
75		7501	825′	900′	75′	150′	540′
80		8001	880′	9601	80′	160′	615′

** Taper lengths have been rounded off.

L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE								
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY				
✓		✓	<b>√</b>					

#### GENERAL NOTES

Shadow Vehicles with TMA and high intensity

- 1. All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere  $\ensuremath{\mathsf{S}}$ in the plans.
- 2. See BC standards for sign details.
- If adequate longitudinal buffer length "B" does not exist between the work space and the exit ramp, consideration should be given to closing

*A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.


Additional requirements for lane closures and advance signing shall be as shown on TCP (6-1) or as directed by the Engineer.



## TRAFFIC CONTROL PLAN WORK AREA BEYOND EXIT RAMP

TCP (6-5) -12

FILE: tcp6-5.dgn		DN: T:	×DOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
©TxDOT Feburary 1998		CONT	SECT	JOB		HIG	GHWAY
	REVISIONS	6450	25	001		IHO	0030
1-97 8-98 4-98 8-12		DIST	DIST COUNTY		SHEET NO.		
		18		DALLA	S	36	

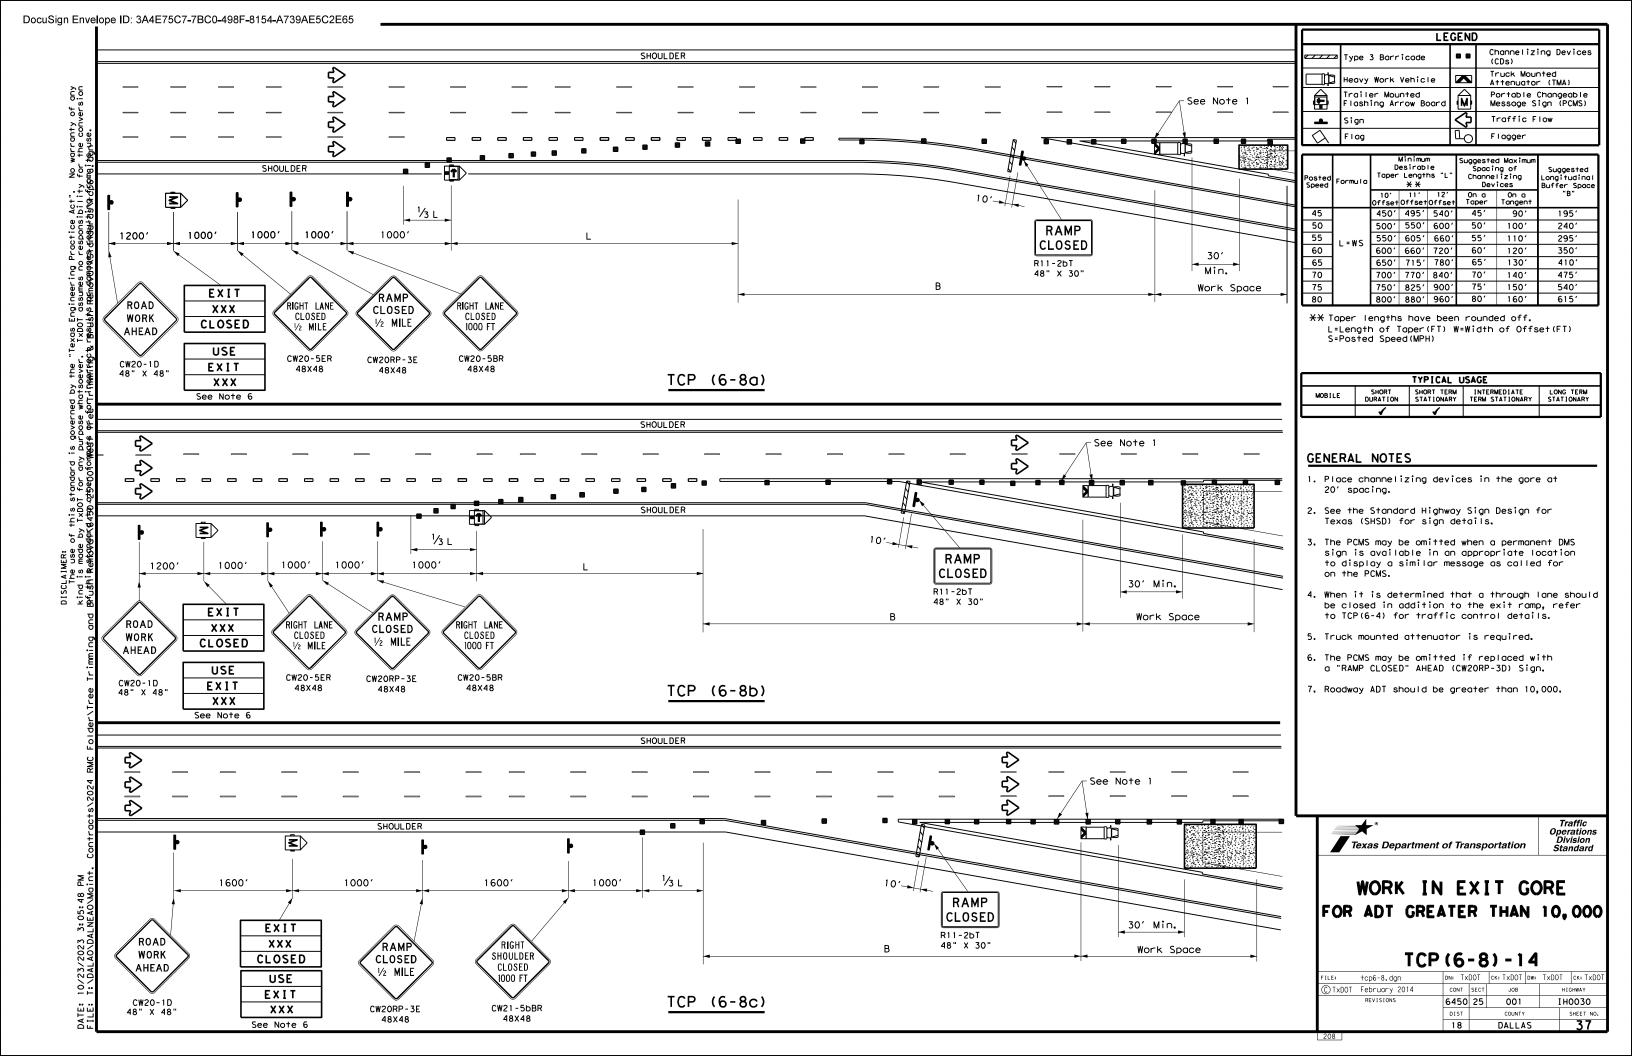

	LEGEND								
•	Type 3 Barricade		Channelizing Devices (CDs)						
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)						
	Trailer Mounted Flashing Arrow Board	M	Portable Changeable Message Sign (PCMS)						
4	Sign	<b>♡</b>	Traffic Flow						
$\triangle$	Flag	P	Flagger						

	Posted Speed	Formula	Minimum Desirable Taper Lengths "L" X **  Suggested Maximum Spacing of Channellzing Devices			Desirable Spacing of Sugge Taper Lengths "L" Channelizing Longit X X Devices Buffer		Suggested Longitudinal Buffer Space
ı			10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	"В"
ı	45		450'	4951	540'	45′	90'	195′
ı	50		5001	550′	600'	50′	1001	240'
ı	55	L=WS	550′	6051	660,	55′	110'	295′
1	60	L-#3	600'	660'	720′	60′	120'	350′
1	65		650'	715′	780′	65′	130′	410'
ı	70		700′	770′	840′	70′	140′	475′
ı	75		750′	8251	900'	75′	150′	540′
·	80		8001	880'	960'	80′	160'	615'

** Taper lengths have been rounded off. L=Length of Toper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

		TYPICAL L	JSAGE	
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		1		

- 1. Place channelizing devices in the gore at
- 2. See the Standard Highway Sign Design for Texas (SHSD) for sign details.
- 3. The PCMS may be omitted when a permanent DMS sign is available in an appropriate location to display a similar message as called for
- 4. When it is determined that a through lane should be closed in addition to the exit ramp, refer to TCP(6-4) and TCP(6-8) for
- 5. Truck mounted attenuators are required.
- 6. The PCMS may be omitted if replaced with a "ROAD WORK 1/2 MILE" (CW20-1E).
- 7. Roadway ADT should be less than 10,000.

Texas Department of Transportation

Traffic Operations Division Standard

# WORK IN EXIT GORE FOR ADT LESS THAN 10,000

TCP (6-9) -14

.E:	tcp6-9.dgn	DN: TxDOT		CK: TXDOT DW:		TxDOT ck: TxD0	
)TxDOT	February 2014	CONT SECT		JOB		HIGHWAY	
REVISIONS		6450	25	001		IH0030	
		DIST COUNTY		SHEET NO.			
		18	DALLAS				38