

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT

STATE AID PROJECT NO. C 901-19-176

EISENHOWER STATE PARK GRAYSON COUNTY

CSJ: 0901-19-176

LIMITS: WITHIN EISENHOWER STATE PARK

TOTAL LENGTH OF PROJECT: 2.24 MI.
FOR THE OVERLAYING OF EXISTING ROADWAY
OVERLAY PARK ROADS, PARKING LOTS AND CAMPSITE PULLOUTS

STATE PROJECT NO. C 901-19-176			
CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST		COUNTY	SHEET NO.
PAR		GRAYSON	1

DESIGN SPEED= 20
A.D.T.(2022)= 470 VPD
A.D.T.(2042)= 705 VPD

INDEX OF SHEETS

SEE SHEET 2 FOR INDEX OF SHEETS


FINAL PLANS

LETTING DATE: _____
 DATE CONTRACTOR BEGAN WORK: _____
 DATE WORK WAS COMPLETED: _____
 DATE WORK WAS ACCEPTED: _____
 ORIGINAL CONTRACT WORKING DAYS: _____
 USED _____ OF _____ WORKING DAYS
 NO. OF CHANGE ORDERS: _____
 FINAL CONTRACT COST: _____
 PERCENT OVER/UNDER RUN: _____
 CONTRACTOR: _____

I CERTIFY THAT THIS PROJECT WAS BUILT IN ACCORDANCE WITH PLANS AND SPECIFICATIONS.

AREA ENGINEER _____ DATE _____

REQUIRED SIGNS SHALL BE IN ACCORDANCE WITH BC (1)- 21 THRU BC (12)- 21 AND THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES".

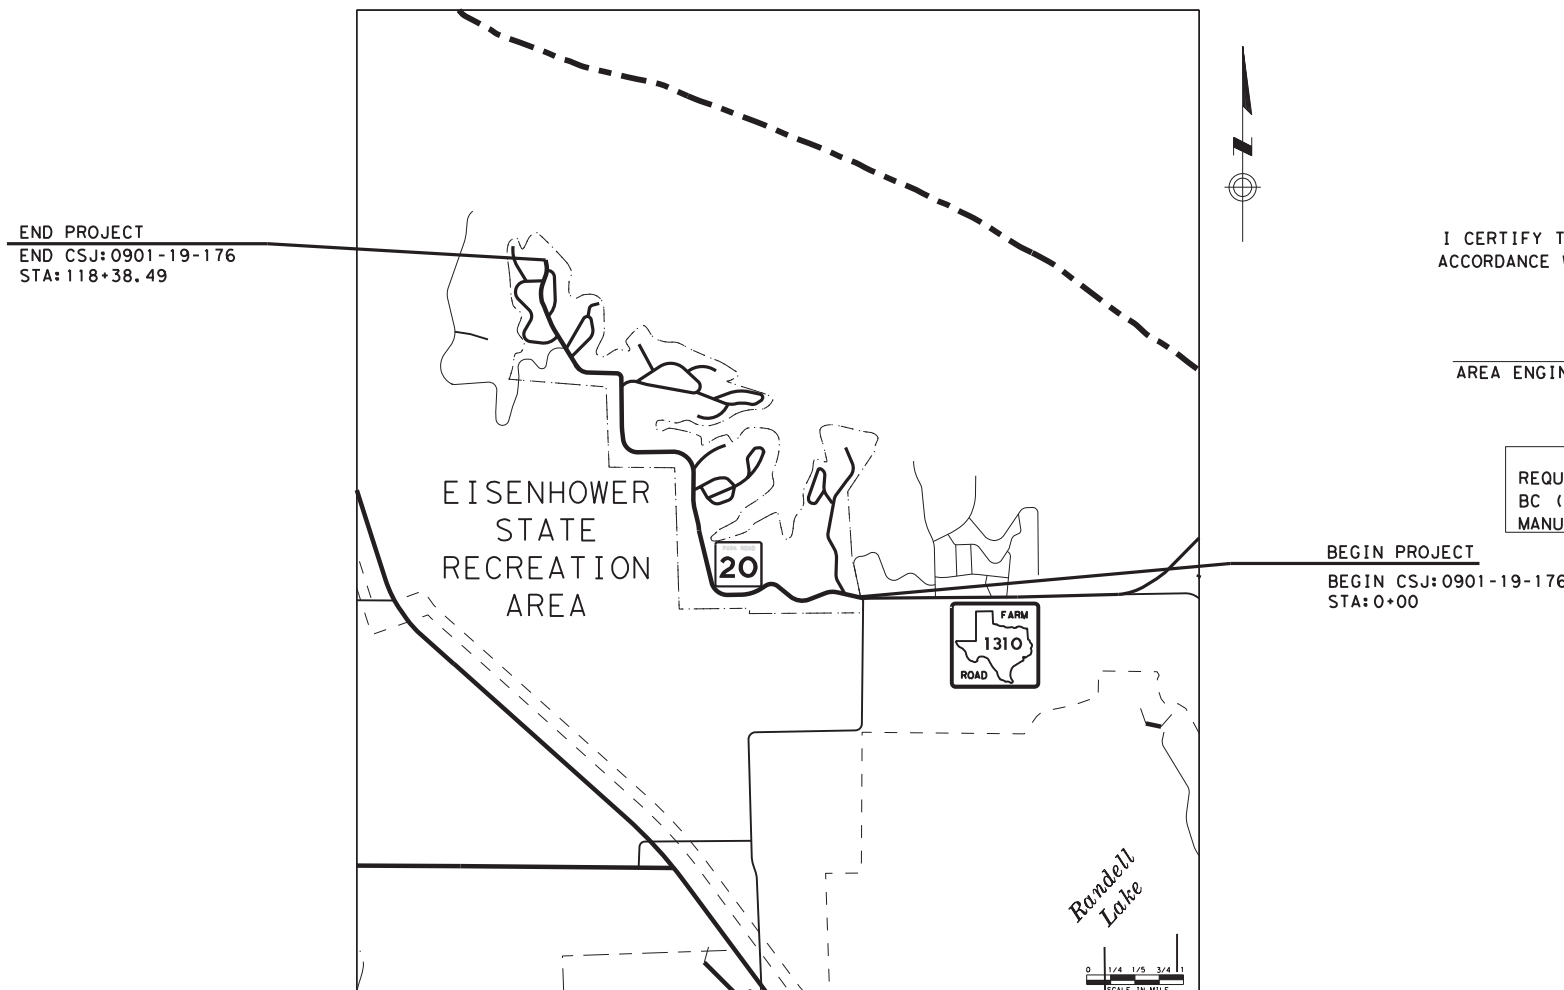

EXCEPTIONS: NONE
 EQUATIONS: NONE
 RAILROAD CROSSINGS: NONE
 BRIDGE: NONE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT: REQUIRED SPECIAL LABOR PROVISIONS FOR ALL STATE CONSTRUCTION PROJECTS (000-008)

©2023
BY TEXAS DEPARTMENT OF TRANSPORTATION
ALL RIGHTS RESERVED.



SUBMITTED FOR LETTING: Nov. 02, 2022

Monte R. Riter P.E.
DESIGN ENGINEER

RECOMMENDED FOR LETTING: 11/4/2022

Chawn R. Bloom
AREA ENGINEER

APPROVED FOR LETTING: 11/4/2022

Noel Paramanathan
DISTRICT ENGINEER

DATE: 11/2/2022 4:20:52 PM FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD_parking_lot_rehab_projects\CSJ_0901-19-176, etc\Submittal\95% Plans\DGNS\001 TITLE SHEET.dgn

INDEX OF SHEETS

SHEET NO.

DESCRIPTION

SHEET NO.

DESCRIPTION

GENERAL

- 1 TITLE SHEET
- 2 INDEX OF SHEETS
- 3 PAVEMENT CORE DATA
- 4-6 TYPICAL SECTIONS
- 7, 7A-7D GENERAL NOTES
- 8, 8A ESTIMATE & QUANTITY
- 9-11 QUANTITY SUMMARIES

TRAFFIC CONTROL PLAN

- 12 SEQUENCE OF WORK

TRAFFIC CONTROL PLAN STANDARDS

- # 13-24 BC (1)-21 THRU BC (12)-21
- # 25 TCP (1-1)-18
- # 26 TCP (1-2)-18
- # 27 TCP (2-1)-18
- # 28 TCP (2-2)-18
- # 29 TCP (3-1)-13
- # 30 TCP (3-3)-14
- # 31 WZ (RS)-22
- # 32 WZ (STPM)-13
- # 33 WZ (UL)-13

ROADWAY DETAILS

- 34-57 PLAN LAYOUTS
- 58 PR 20 REALIGNMENT PLAN & PROFILE
- 59 TREATMENT FOR VARIOUS EDGE CONDITIONS
- 60 HOTMIX LONGITUDINAL JOINT DETAIL
- 61 MISCELLANEOUS DETAILS

ROADWAY DETAILS STANDARDS

- # 62 CCCG-22
- # 63 TE (HMAC)-11
- # 64 GF (31)-19
- # 65 SGT (12S) 31-18
- # 66 SGT (15) 31-20
- # 66A-66B SRR

SIGNING

SIGNING STANDARDS

- # 67 SMD (GEN)-08
- # 68 SMD (SLIP-1)-08
- # 69 SMD (SLIP-2)-08
- # 69A SMD (TWT)-08

PAVEMENT MARKING DETAILS

PAVEMENT MARKINGS & DELINEATION STANDARDS


- # 70 D & OM (1)-20
- # 71 D & OM (2)-20
- # 72 D & OM (4)-20
- # 73 D & OM (VIA)-20
- # 74 PM (AP)-21
- # 75 PM (1)-20
- 76 OMIT

ENVIRONMENTAL ISSUES

- 77 SW3P
- 78 EPIC

ENVIRONMENTAL ISSUES STANDARDS

- # 79-81 EC (9)-16



THE STANDARD SHEETS SPECIFICALLY IDENTIFIED WITH A " # " HAVE BEEN ISSUED BY ME AND ARE APPLICABLE TO THIS PROJECT.

Monte R. Rater P.E. 11.02.22
 NAME DATE



EISENHOWER STATE PARK
INDEX OF SHEETS

©2023 SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	2	

DATE: 11/2/2022 4:20:53 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSI 0901-19-176, etc\Submittal\95% Plans\DGNS\002 INDEX OF SHEETS.dgn

CK: DW: CK: DW: CK: DW:

CORE DATA

PAVEMENT CORES PROVIDED BY EST, INC.

NO. B-01	FOSSIL RIDGE DR (INTERNAL ACCESS RD) PARKING LOT GPS: 33.825641, -96.616255	BROWN SANDY CLAY SUBGRADE	2" ACP 510" RAP
NO. B-02	STATE PARK 20A (INTERNAL ACCESS RD) WEST BOUND LANE WITHIN MAIN LANE GPS: 33.817755, -91.609263	TAN/BROWN SANDY CLAY SUBGRADE WITH LIMESTONE FRAG.	1" ACP 6.5" BASE
NO. B-03	STATE PARK 20A (INTERNAL ACCESS RD) PARKING LOT/EAST BOUND ROAD WITHIN MAIN LANE GPS: 33.819116, -91.604809	GRAY/BROWN CLAY SUBGRADE	1.5" ACP 7.5" BASE
NO. B-04	ARMADILLO HILL DR SOUTH BOUND LANE WITHIN MAIN LANE GPS: 33.812091, -96.600759	TAN/BROWN SANDY CLAY SUBGRADE WITH LIMESTONE FRAG.	3" ACP 9" GRAVELLY BASE/RAP

DATE: 11/2/2022 4:20:53 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176.etc\Submit\95% Plans\DGNS\003 PAVEMENT CORE DATA.dgn




EISENHOWER STATE
 PARK
 PAVEMENT CORE DATA


© 2023 SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	3	

DATE: 11/2/2022 4:20:54 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab projects CSI 0901-19-176. etc\Submittal\95% Plans\DGNS\004 TYPICAL SECTION.dgn

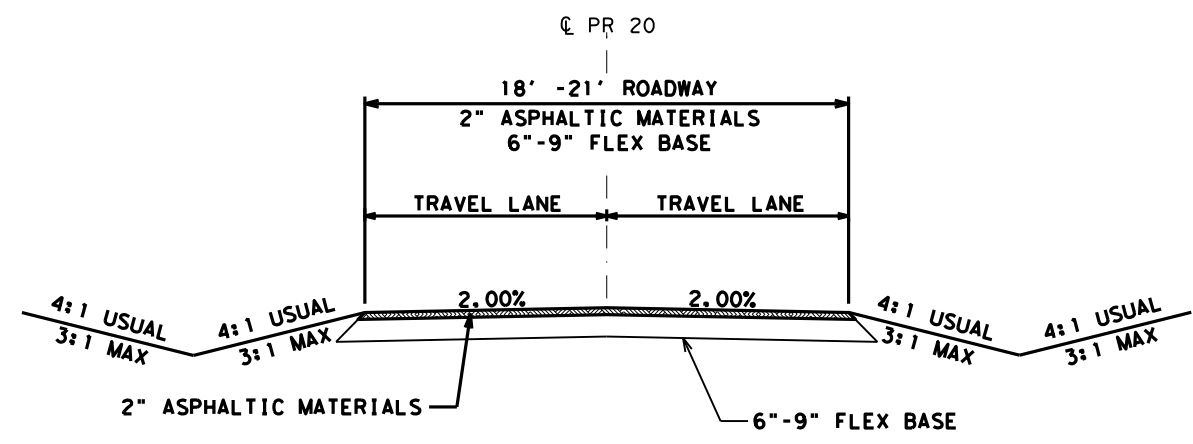

PARK ROAD 20
 EXISTING TYPICAL SECTION
 STATION 0+00 TO 118+38.49

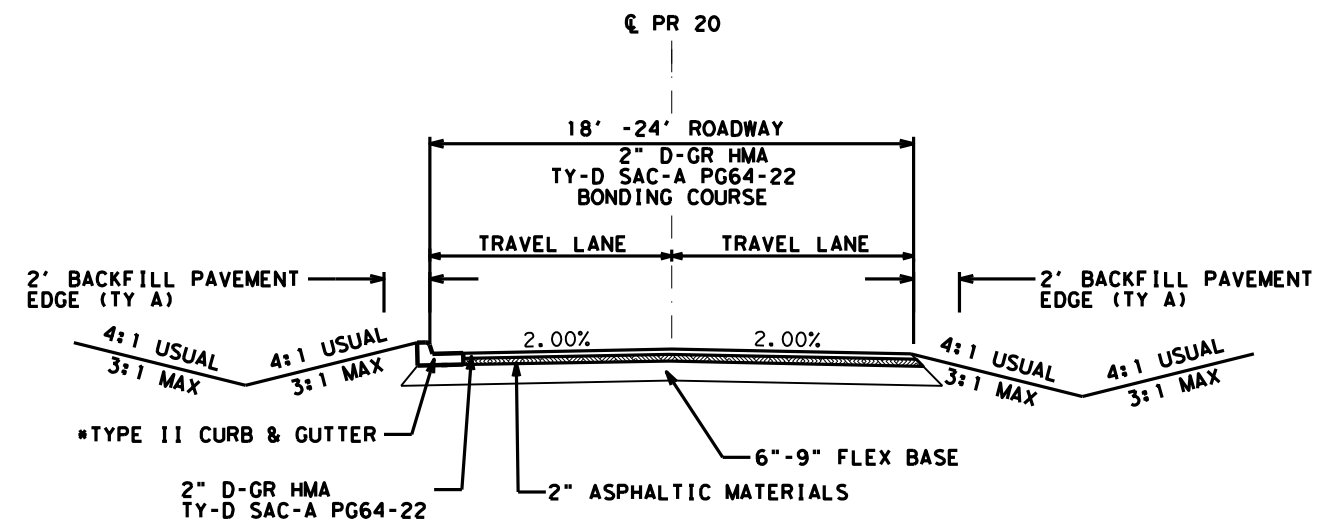

PARK ROAD 20
 PROPOSED TYPICAL SECTION

WIDTH 21'
 STA: 0+00 TO 82+07.5

TRANSITION WIDTH 21' TO 24'
 STA: 82+07.5 TO 83+17.5

WIDTH 24'
 STA: 83+17.5 TO 85+52.92

TRANSITION WIDTH 24' TO 21'
 STA: 85+52.92 - 86+52.92

WIDTH 21'
 STA: 86+52.92 TO 118+38.49

***NOTE: CURB & GUTTER TO BE PLACED ONLY ON LEFT SIDE OF ROAD FROM STATIONS 83+95.13 - 85+23.73**

Monte R. Rater P.E.

 11.02.22




EISENHOWER STATE PARK		
TYPICAL SECTIONS		
© 2023 SHEET 1 OF 3		
CONT	SECT	HIGHWAY
0901	19	176
DIST	COUNTY	SHEET NO.
PAR	GRAYSON	4


PARK ROAD 20

DATE: 11/2/2022 4:20:54 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab projects\CSJ 0901-19-176. etc\Submit\195% Plans\DGNS\005 TYPICAL SECTION.dgn

DW: CK: DW: CK: DW: CK:

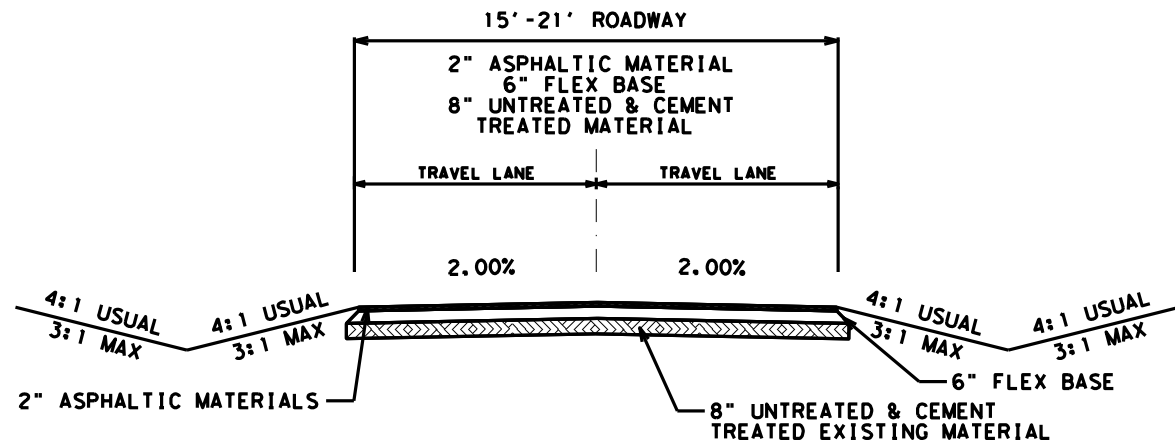


EXISTING PARK SIDE ROADS
SEE PLAN LAYOUT SHEETS FOR LOCATIONS

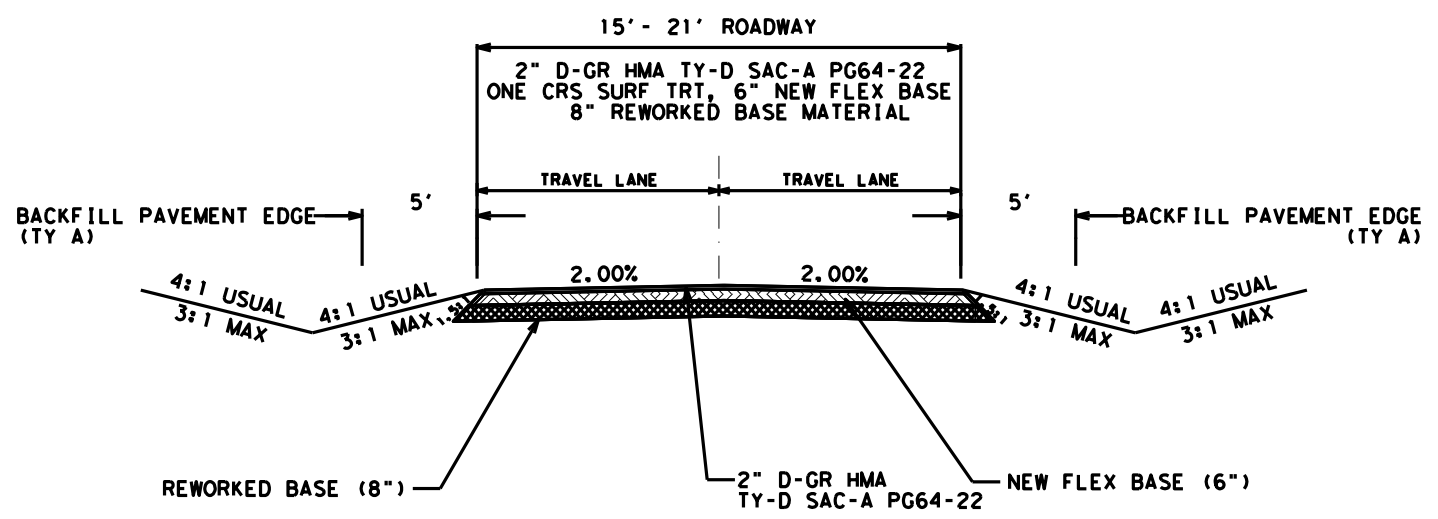


PROPOSED
PARK SIDE ROADS REHAB
SEE PLAN LAYOUT SHEETS FOR LOCATIONS

Monte R. Rater P.E.



11.02.22



PARK ROAD REHAB




EISENHOWER STATE
PARK
TYPICAL SECTIONS


© 2023 SHEET 2 OF 3

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	5	

DATE: 11/2/2022 4:20:55 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab projects CS\0901-19-176_etc\Submittal\95% Plans\DGNS\006 TYPICAL SECTION.dgn

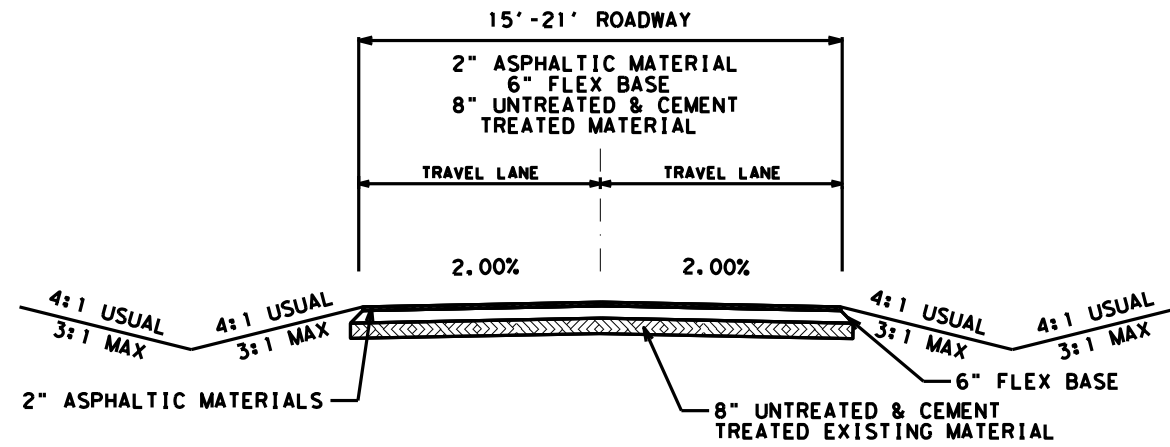


EXISTING SIDE ROADS
SEE PLAN LAYOUTS FOR LOCATIONS

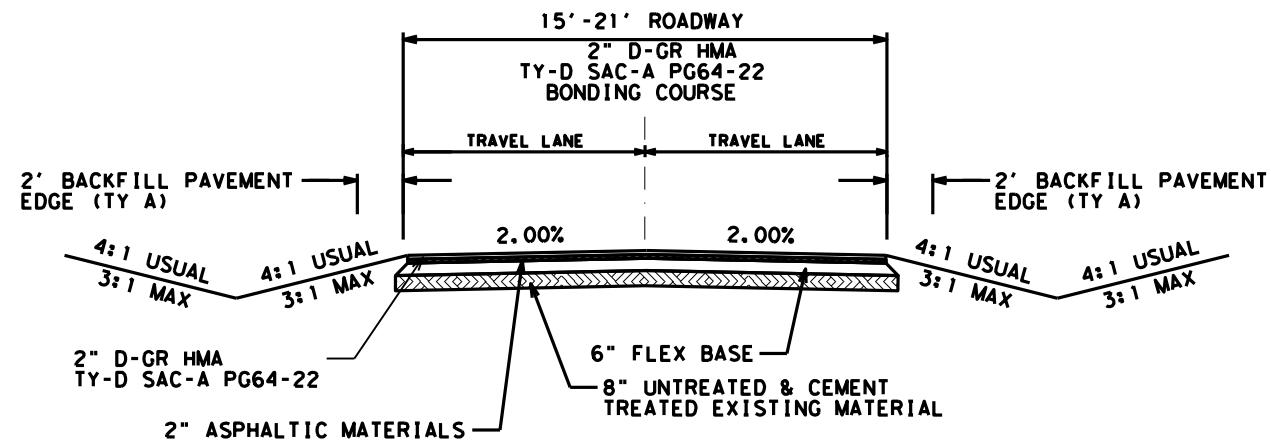

PROPOSED SIDE ROADS
2" OVERLAY
SEE PLAN SHEET LAYOUTS FOR LOCATIONS

Monte R. Rater P.E.

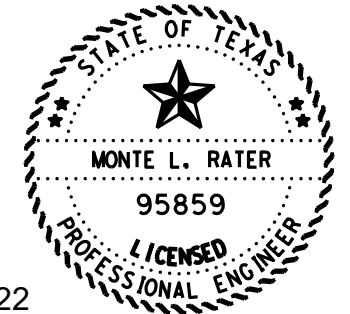

11.02.22



EISENHOWER STATE
PARK

TYPICAL SECTIONS

© 2023 SHEET 3 OF 3

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	6	

PARK SIDE ROADS
OVERLAY

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet:

GENERAL NOTES

General:

Contractor questions on this project are to be addressed to the following individual(s):

Sherman Area Office
Aaron Bloom, P.E. – Aaron.Bloom@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:
<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Dispose of waste materials at an approved site. Furnish written approval from the property owner before disposal of waste materials.

Locate equipment a minimum of 30 feet from roadway when possible. Place signs and barricades as approved.

Stockpile sites for construction materials must be approved. Give at least 48 hours notification prior to stockpiling material.

Item 5 Control of the Work:

The responsibility for the construction surveying on this contract will be in accordance with Section 5.9.3, Method C.

Working days will be computed and charged in accordance with Article 8.3.1.4 Standard Work Week.

Right and left are determined based upon the forward direction of stationing in the specific control section.

Item 7 Legal Relations and Responsibilities:

No significant traffic generator events identified.

Item 8 Prosecution and Progress:

Before beginning work on this project submit in writing, for approval, a plan of construction

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet: 7

operations outlining in detail a sequence of work to be followed.

Provide a Bar Chart progress schedule for this project.

Adjacent construction operations shall only be allowed on one side of the roadway at a time.

Item 9 Measurement and Payment:

Items of work for the Monthly Estimate will be cut off on the 25th of each month. Items of work performed after the 25th will be processed and paid on the following month's estimate. Material On Hand (MOH) will cut off on the 20th of each month. Special circumstances will be considered on a case-by-case basis.

Item 105 Removing Treated and Untreated Base and Asphalt Pavement:

Process salvage material into pieces not larger than 2". Construct separate stockpiles for asphaltic surfacing material and flexible base material.

Item 132 Embankment:

Test potential embankment sources using Tex-145-E to determine the presence and concentration of sulfates. Do not bring soil with greater than 3000 ppm sulfates into project.

Excavation pits for project embankment made within 250 feet of State Right of Way must be approved.

Before embankment operations the existing topsoil shall be salvaged in a manner to preserve the vigor of the existing Bermuda grass sod per Item 160.

Item 134 Backfilling Pavement Edges:

Use Type A backfill Material for final backfill consisting of subsoil obtained below topsoil to prevent noxious seed transfer. Provide material free of vegetation and other objectionable material with a Plasticity Index between 15 and 30.

The backfill material source shall be approved.

Place backfill with a road widener.

Item 164 Seeding for Erosion Control, 166 Fertilizer:

Apply fertilizer with a ratio of 3-1-2 (N-P-K) over the areas to be seeded. This work will not be paid for directly, but will be considered subsidiary.

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet:

Item 164 Seeding for Erosion Control, 166 Fertilizer (Cont.):

Seed mixture.

Canada Wildrye (*Elymus canadensis*) at 10 PLS/acre
Little Bluestem (*Schizachyrium scoparium*) at 8 PLS/acre
Green Sprangletop (*Leptochloa dubia*) at 2 PLS/acre
Buffalograss (*Bouteloua dactyloides*) at 8 PLS/acre
Partridge Pea (*Chamaecrista fasciculata*) at 13 PLS/acre

If plantings are done between September and March, add Cereal Rye Grain (*Secale cereale*) at 25 PLS lbs/acre.

Item 168 Vegetative Watering:

Use water trucks equipped with a sprinkler system adequate to permit coverage of the entire seeded area from the roadbed. This equipment must be available to perform watering throughout the duration of vegetative establishment.

Water all seeded areas the day seed is applied. Thereafter, maintain the seeded areas in a well-watered condition throughout the duration of vegetative establishment.

Item 247 Flexible Base:

Grading requirements

Tests to be in accordance with TxDOT Standard Test Methods

Soil Constants

Item Desc. Linear Shrinkage LL Wet Ball WBMV(incr. passing #40 sieve)
Item 247 Flex Base 6.0 max. 40 max. 40 max. 20% max.

PERCENT RETAINED ON SIEVE:

1-3/4"	7/8"	3/8"	No. 4	No. 40
0	10-35	30-50	45-65	70-85

Flexible Base will not contain more than 1% by weight of clay balls.

All pavement edge drop-offs, at end of day, shall be backfilled in accordance with Edge Treatment Condition I on the "Treatment for Various Edge Conditions" sheet. Backfill material shall be approved by the Engineer.

Item 251 Reworking Base Courses:

Full depth HMAC patching and stabilized areas of various depths are to be expected and are to be reworked into existing base. Stabilized areas may include but are not limited to cement, fly ash, or asphalt treated base.

The finished roadway must match existing grades at project limits, intersections and

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet: 7A

work area terminations. In these areas, salvage existing base and remove sufficient subgrade material to construct the full-depth proposed pavement section, according to the transition details shown in the plans. This removal will not be paid for directly, but will be considered subsidiary to the various bid items. Excess subgrade material generated by these transitions may be utilized to construct slopes, or wasted as approved by the Engineer.

Item 302 Aggregates for Surface Treatments:

Grade 5 Modified Grading Requirements

CUMULATIVE PERCENT RETAINED ON SIEVE:

1/2"	3/8"	No. 4	No. 8	No. 200
0	0-5	30-80	85-100	95-100

The decantation requirement for Grade 5 Modified aggregate is 4% maximum.

The requirements for Flakiness Index, Magnesium Sulfate Soundness, and Los Angeles Abrasion are waived for the Grade 5 Modified aggregate.

Item 316 Surface Treatments:

Unless otherwise permitted by the Engineer in writing, the open season for asphalt placement will be:

May 15- August 31 for AC

Permission to place asphalt outside of the open season may require the contractor to place a fog seal at the contractor's expense.

***Rates For Construction Projects**

First Course

ITEM	APPLICATION
	1 st Course
*Asphalt Type	AC-20-5TR or AC-20XP
*Asph. Rate (Gal/SY)	0.46
Aggregate Type	B
Aggregate Grade	3
Aggr. Rate (CY/SY)	1:105
Min. Cure Time	

* The information above is intended to provide general guidance and as a basis of estimate. Based on the season and weather conditions at the time, the engineer will determine the asphalt type and rates to be used at the time of application.

** Or as approved by the Engineer

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet:

Item 351 Flexible Pavement Structure Repair:

Engineer will select pavement repair areas before scheduled work begins.

Perform flexible pavement structure repair before the final HMAC placement.

Item 354 Planing and Texturing Pavement:

The planing operation will be followed closely by the hot-mix asphalt (HMA) overlay operation. If inclement weather or other unexpected factors do not allow planed areas to be overlaid, warning signs per Standard Sheet WZ(UL) will be maintained until the hot-mix asphalt overlay operation is completed.

RAP will become the property of the Contractor.

Item 432 Riprap:

The Engineer may adjust placement of riprap in the field.

ADA vehicle parking area shall utilize 6" concrete riprap and be reinforced longitudinally and transversely with #4 rebar at 12" c-c spacing between the #4 bars. Center rebar vertically in the sidewalk. Use grade 60 rebar.

Item 502 Barricades, Signs and Traffic Handling:

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

The following items will be required for flagger on this project:

1. Flaggers are required to wear a white hard hat while performing flagging operations.
2. Flaggers will be required at the intersection of all State maintained roadways.
3. Flaggers may be required at other high traffic generating intersections as deemed necessary by the Area Engineer.

The traffic control plan for this contract consists of the installation and maintenance of warning signs and other traffic control devices shown in the plans, specification data which may be included in the general notes, applicable provisions of the Texas Manual on Uniform Traffic Control Devices (TMUTCD), traffic control plan sheets included in the plans, standard BC sheets and Item 502 of the Standard Specifications.

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet: 7B

Do not begin Item 502, Barricades, Signs, and Traffic Handling, on the roadway until both of the following conditions are met:

1. The work schedule is approved.
2. No more than 5 workdays will pass between the beginning of Item 502 and the actual commencement of roadway work bid items.

Correct all deficiencies within the time frame noted on the Traffic Control Device Inspection Form 599. Failure to make corrections within time frame specified may result in no payment for this Item for the month of the noted deficiency.

Provide shadow vehicles equipped with Truck Mounted Attenuators (TMA) as shown on Traffic Control Plan (TCP) standards.

Ensure that all travel lanes are open at night.

Provide pilot car during one lane/two-way traffic operations.

Road closures must be approved by the Engineer. Provide a two-week advance notice to the Engineer prior to desired roadway closure period. Begin display of closure information on PCMBs ten days prior to roadway closure.

Item 506 Temporary Erosion, Sedimentation & Environmental Controls:

The Temporary Erosion Control measures for this project will consist of using the following items, as directed:

1. Erosion Control Logs

The final estimate will be withheld until all disturbed areas are covered with at least 70% perennial vegetative cover.

Acquire approval for any change to the location of erosion control logs as shown in the plans, prior to installation. Placement of erosion protection devices may be altered, as directed, to satisfy the requirements of the SW3P.

Refer to the SW3P sheet for the total disturbed area for the project.

The disturbed area in this project, all project locations in the Contract, and Contractor project specific locations (PSLs) within one mile of the project limits will further establish the authorization requirements for storm water discharges. The Department will obtain an authorization to discharge storm water from the Texas Commission on Environmental Quality (TCEQ) for the construction activities shown on the plans. Obtain any required authorization from the TCEQ for any Contractor PSLs for construction support activities on or off ROW. When the total area disturbed for all projects in the Contract and PSLs within one mile of the project limits exceeds five acres, provide a copy of the Contractors NOI for PSLs on the ROW (to the appropriate MS4 operator when on an off-system route).

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet:

Item 529 Concrete Curb, Gutter, And Combined Curb And Gutter:

Reinforcing steel shall be required in all curb/curb and gutter unless otherwise directed by the Engineer.

Item 540 Metal Beam Guard Fence:

Reinstall removed MBGF and SGT's on the same day.

MBGF delineation shall be installed within ten (10) working days of the completion of each MBGF section. Concrete mow strip is not considered to be a part of this work.

Item 542 Removing Metal Beam Guard Fence:

Removed MBGF rail shall be retained by the Contractor.

Item 585 Ride Quality for Pavement Surfaces:

Use Surface Test Type A to evaluate ride quality of the final pavement surface on park side roads in accordance with Item 585, "Ride Quality for Pavement Surfaces."

Use Surface Test Type B Pay Adjustment Schedule 2 to evaluate ride quality of the final pavement surface Park Road 20 in accordance with Item 585, "Ride Quality for Pavement Surfaces." A localized roughness penalty of \$500 per occurrence will be assessed.

Item 662 Work Zone Pavement Markings:

Non-removable markings may be paint and beads.

Place flexible reflective roadway tabs in accordance with the current WZ (STPM) prior to seal coat operations. Place tabs to indicate the beginning and ending of no passing zones.

Cut, remove and properly dispose of the upright portions of all work zone tabs prior to acceptance of any roadway. Remove entire tab when located on HMAC or concrete surfaces.

Item 666 ReflectORIZED Pavement Markings:

No stripe will be placed unless the inspector is present and at least 24 hours advance notice has been given by the Contractor.

Lay out pilot lines for approval 24 hours prior to all final pavement marking applications.

Use equipment with footage counters capable of measuring the linear footage placed. Calibrate counters prior to the beginning of striping operations.

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet: 7C

Reduce truck speed enough to ensure that the beads drop onto the stripe and do not roll in the paint film.

Due to problems in traffic handling, do not place a dash center stripe and edge line at the same time.

Contact the Engineer 7 days before pavement marking placement for re-establishment of no-pass zones.

Item 3076 Dense-Graded Hot-Mix Asphalt:

All surface mixes are to be SAC A.

The use of PG 64-22 asphalt is required.

RAS is not allowed in surface mixes

Use a self-propelled wheel mounted MTV capable of receiving mix from the haul trucks, separate from the paver. It shall have a minimum storage capacity of approximately 25 tons. It shall be equipped with a pivoting discharge conveyor and shall completely and thoroughly remix the material prior to placement. The effectiveness of the MTV's remixing ability is subject to the approval of the Engineer. In addition, the paver shall have a surge storage insert with a minimum capacity of 20 tons.

Specify Hot Mix Asphalt Concrete (HMAC) or Warm Mix Asphalt (WMA) at the time of design submittal. After design submittal, continue producing the chosen design unless otherwise approved.

RAP from contractor owned sources may be used if the RAP is fractionated. The course fraction of contractor owned RAP will not be allowed if it consists primarily of siliceous aggregates.

A tack coat is required for all overlay areas and for all longitudinal joints unless otherwise directed.

Evaluation of the mixture for moisture susceptibility will be performed by using test method TEX 530-C (boil test) and there shall be no evidence of stripping during design verification or at any time during production.

The maximum nighttime paved surface vertical differential will be limited to two inches. Prevent ponding of water on any travel ways that are exposed to traffic.

Perform all sampling for aggregate quality testing on stockpiles at the HMAC plant. Mixture sampling for QC/QA testing will typically be taken from the truck at the plant; however, the Engineer may direct that a sample be taken at any point or location of mixture during production, delivery or placement.

County: GRAYSON

Control: 0901-19-176

Highway: VARIOUS

Sheet: 7D

Item 3076 Dense-Graded Hot-Mix Asphalt (Cont.):

Preparation and construction of permanent / temporary transitions, terminations of mix courses and transitions to driveways and intersecting roadways is subsidiary to Item 341. This includes all labor, machinery, materials and incidentals to complete the work including planing, removal, hauling and stockpiling of materials and necessary clean-up.

Item 3096 Asphalts, Oils, and Emulsions:

Provide 1L (1qt.) clean and dry screw top or friction-lid sampling cans as directed.

Furnish at least one sample of each type of asphalt used on the project for QA/QC purposes.

Item 6185 Truck Mounted Attenuators:

Shadow vehicles with truck mounted attenuator (TMA) are required on the traffic control plan and TCP standards for this project. The contractor will be responsible for determining if one or more of these traffic control operations will be ongoing at the same time to determine the total number of TMAs needed for the project.



CONTROLLING PROJECT ID 0901-19-176

DISTRICT Paris
HIGHWAY Various

Estimate & Quantity Sheet

COUNTY Grayson

ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	100-6002	PREPARING ROW	STA	4.440	
	105-6008	REMOVING STAB BASE AND ASPH PAV (6")	SY	653.000	
	110-6001	EXCAVATION (ROADWAY)	CY	564.980	
	132-6003	EMBANKMENT (FINAL)(ORD COMP)(TY B)	CY	224.220	
	134-6001	BACKFILL (TY A)	STA	672.390	
	164-6015	STRAW/HAY MLCH SEED(PERM)(RURAL)(CLAY)	SY	25,908.000	
	168-6001	VEGETATIVE WATERING	MG	164.000	
	216-6001	PROOF ROLLING	HR	9.150	
	247-6076	FL BS (CMP IN PLC)(TY D GR 4) (6")	SY	13,509.000	
	251-6028	REWORK BS MTL (TY B) (8") (DENS CONT)	SY	13,509.000	
	316-6405	ASPH (AC-20-5TR OR AC-20XP)	GAL	6,221.000	
	316-6415	AGGR (TY-B GR-3)	CY	136.000	
	351-6002	FLEXIBLE PAVEMENT STRUCTURE REPAIR(6")	SY	1,731.000	
	354-6021	PLANE ASPH CONC PAV(0" TO 2")	SY	134.000	
	432-6002	RIPRAP (CONC)(5 IN)	CY	12.000	
	432-6003	RIPRAP (CONC)(6 IN)	CY	12.000	
	432-6031	RIPRAP (STONE PROTECTION)(12 IN)	CY	7.400	
	500-6001	MOBILIZATION	LS	1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	11.000	
	506-6041	BIODEG EROSN CONT LOGS (INSTL) (12")	LF	1,196.000	
	506-6043	BIODEG EROSN CONT LOGS (REMOVE)	LF	1,196.000	
	529-6008	CONC CURB & GUTTER (TY II)	LF	129.000	
	540-6002	MTL W-BEAM GD FEN (STEEL POST)	LF	3,542.500	
	542-6001	REMOVE METAL BEAM GUARD FENCE	LF	4,573.000	
	542-6002	REMOVE TERMINAL ANCHOR SECTION	EA	24.000	
	544-6001	GUARDRAIL END TREATMENT (INSTALL)	EA	24.000	
	644-6058	IN SM RD SN SUP&AM TYTWT(1)UB(P)	EA	2.000	
	644-6076	REMOVE SM RD SN SUP&AM	EA	2.000	
	658-6062	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2(BI)	EA	59.000	
	662-6111	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	EA	1,038.000	
	666-6041	REFL PAV MRK TY I (W)12"(SLD)(090MIL)	LF	184.500	
	666-6053	REFL PAV MRK TY I (W)(ARROW)(090MIL)	EA	3.000	
	666-6302	RE PM W/RET REQ TY I (W)4"(SLD)(090MIL)	LF	4,978.000	
	666-6308	RE PM W/RET REQ TY I (W)6"(SLD)(090MIL)	LF	144.000	
	666-6314	RE PM W/RET REQ TY I (Y)4"(SLD)(090MIL)	LF	20,704.000	
	3076-6036	D-GR HMA TY-D SAC-A PG64-22	TON	15,527.000	
	3076-6071	D-GR HMA TY-D PG 64-22 (EXEMPT)	TON	211.000	
	3084-6001	BONDING COURSE	GAL	7,068.510	
	5150-6001	PRECAST CONCRETE WHEEL STOPS	EA	237.000	
	5150-6002	MOVE AND RESTE PRECAST CONC WHEEL STOPS	EA	238.000	
	6047-6065	PREFB PAV MK TY C (ACC PARK)	EA	3.000	

ESTIMATE & QUANTITY



DISTRICT	COUNTY	CCSJ	SHEET
Paris	Grayson	0901-19-176	8



CONTROLLING PROJECT ID 0901-19-176

DISTRICT Paris
HIGHWAY Various

COUNTY Grayson

Estimate & Quantity Sheet

ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	6185-6002	TMA (STATIONARY)	DAY	124.000	
	6185-6003	TMA (MOBILE OPERATION)	HR	160.000	
	08	CONTRACTOR FORCE ACCOUNT SAFETY CONTINGENCY (NON-PARTICIPATING)	LS	1.000	
		CONTRACTOR FORCE ACCOUNT EROSION CONTROL MAINTENANCE (NON-PARTICIPATING)	LS	1.000	

ESTIMATE & QUANTITY



DISTRICT	COUNTY	CCSJ	SHEET
Paris	Grayson	0901-19-176	8A

DATE: 11/3/2022 11:49:10 AM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ_0901-19-176_etc\Submittal\95%_Plans\DGNS\009 QUANTITY SUMMARIES.dgn

ROADWAY ITEMS																	
LOCATION	AREA (SQ. FT.)	105	132	134	216	247	251	316	316	351	354	432	432	432	3076	3076	3084
		6008	6003	6001	6001	6076	6028	6405	6415	6002	6021	6002	6003	6031	6036	6071	6001
ROADWAYS		REMOVING STAB BASE AND ASPH PAV (6")	EMBANKMENT (FINAL)(ORD COMP)(TY B)	BACKFILL (TY A)	PROOF ROLLING	FL BS (CMP IN PLC)(TY D GR 4) (6")	REWORK BS MTL (TY B) (8") (DENS CONT)	ASPH (AC-20-5 TR OR AC-20XP)	AGGR (TY-B GR-3)	FLEXIBLE PAVEMENT STRUCTURE REPAIR(6")	PLANE ASPH CONC PAV(0" TO 2")	RIPRAP (CONC)(5 IN)	RIPRAP (CONC)(6 IN)	RIPRAP (STONE PROTECTION) (12 IN)	D-GR HMA TY-D SAC-A PG64-22	D-GR HMA TY-D SAC-A PG64-22 (EXEMPT)**	BONDING COURSE
		SY	CY	STA	HR	SY	SY	GAL	CY	SY	SY	CY	CY	CY	TON	TON	GAL
PARK ROAD 20	248,609.00		50	118.39						186			4		3039		1382
ARMADILLO HILL	123,103.00			58.62						84					1505		684
ARMADILLO HILL CAMP PULL-INS	28,220.00			18.81											345	5	157
BOAT DOCK ROAD	6,609.00			3.30								5			81		37
BOIS D' ARC RIDGE	65,327.00			43.55						94					799		363
* BOIS D' ARC RIDGE RV PULL-THROUGHS	70,028.00			58.36											856	56	390
CEDAR HOLLOW	38,418.00			21.34						316					470		214
DEER HAVEN & YACHT CLUB	212,189.00			106.09						431					2594		1179
DEER HAVEN CAMP PULL-INS	14,196.00			9.46											174	8	79
ELM POINT EAST	27,385.00			15.21											335		153
ELM POINT WEST & OVERFLOW PARKING	60,201.00			33.45						351					736	5	335
ELM POINT WEST CAMP PULL-INS	14,017.00			9.34											172	3	78
FOSSIL RIDGE	37,852.00			25.23						134					463		211
FOSSIL RIDGE CAMP PULL-INS	5,675.00			3.78											70	5	32
SOUTH COVE	46,955.00			23.48								7		7.40	574		261
SOUTH COVE BASE REMOVAL	5,875.00	653								135					72		33
MIDCOVE ROAD	42,547.00			21.27	3.15	4727	4727	2175	46						521		237
PROJECT SUBTOTAL		653	50	569.68	3.15	4727	4727	2175	46	1731	0	12	4	7.40	12806	82	5825

* NOTE: SEE PLAN LAYOUT SHEETS 44 AND 45 FOR LEVEL UP LOCATIONS AND AMOUNTS

ROADWAY ITEMS CONTINUED																	
LOCATION	AREA (SQ. FT.)	105	132	134	216	247	251	316	316	351	354	432	432	432	3076	3076	3084
		6008	6003	6001	6001	6076	6028	6405	6415	6002	6021	6002	6003	6031	6036	6071	6001
PARKING LOTS		REMOVING STAB BASE AND ASPH PAV (6")	EMBANKMENT (FINAL)(ORD COMP)(TY B)	BACKFILL (TY A)	PROOF ROLLING	FL BS (CMP IN PLC)(TY D GR 4) (6")	REWORK BS MTL (TY B) (8") (DENS CONT)	ASPH (AC-20-5 TR OR AC-20XP)	AGGR (TY-B GR-3)	FLEXIBLE PAVEMENT STRUCTURE REPAIR(6")	PLANE ASPH CONC PAV(0" TO 2")	RIPRAP (CONC)(5 IN)	RIPRAP (CONC)(6 IN)	RIPRAP (STONE PROTECTION) (12 IN)	D-GR HMA TY-D SAC-A PG64-22	D-GR HMA TY-D SAC-A PG64-22 (EXEMPT)**	BONDING COURSE
		SY	CY	STA	HR	SY	SY	GAL	CY	SY	SY	CY	CY	CY	TON	TON	GAL
LOT A (& EXIT)	8,277.00			7.70							134		4		102		46
LOT B	4,172.00			2.35											51		24
LOT C	1,203.00			1.08											15		7
LOT D	1,187.00			1.06											15		7
LOT E	18,595.00			3.92											228		104
LOT F	2,319.00			1.83											29		13
LOT G	4,468.00			3.12											55		25
LOT H	17,098.00			6.14											209		95
LOT I	900.00			0.86											11		5
LOT J	2,245.00			1.44											28		13
LOT K	5,899.00			2.28											73		33
LOT L	28,163.00			8.19											345		157
LOT M	6,528.00			2.84	0.48	726	726	334	7						80		37
LOT N	6,119.00			2.67	0.45	680	680	313	7						75		34
LOT O	982.00			1.02	0.07	110	110	51	2						13		6
LOT P	12,980.00			4.53	0.96	1443	1443	664	14						159		73
PROJECT SUBTOTAL		0	0	51.03	1.96	2959	2959	1362	30	0	134	0	4	0	1488	0	679

ASPH: AC-20-5TR or AC-20XP @ 0.46 GAL/SY
 AGGR: GR 3 B OR L @ 1:105 CY/SY
 BONDING COURSE BASED ON 0.05 GAL/SY
 PROOF ROLLING BASED ON 5,000 SY/HR

** ITEM 3076-6071 IS FOR LEVEL UP AT INDICATED LOCATIONS

ROADWAY ITEMS	
LOCATION	3076
	6071
	D-GR HMA TY-D SAC-A PG64-22 (EXEMPT)**
	TON
PARKING LOTS LEVEL UP	129
PROJECT TOTAL	129

NOTE: ENGINEER TO DETERMINE AREAS OF USE WHERE NEEDED.



EISENHOWER STATE PARK
 QUANTITY SUMMARIES

© 2023		SHEET 1 OF 3	
CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	9	

DATE: 11/14/2022 2:14:27 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\EisenhowerTPWD parking lot rehab projects\CSJ 0901-19-176.etc\Submittal\95% Plans\DGNS\010 QUANTITY SUMMARIES.dgn

ROADWAY ITEMS CONTINUED																	
LOCATION	AREA (SQ. FT.)	105	132	134	216	247	251	316	316	351	354	432	432	432	3076	3076	3084
		6008	6003	6001	6001	6076	6028	6405	6415	6002	6021	6002	6003	6031	6036	6071	6001
		REMOVING STAB BASE AND ASPH PAV (6")	EMBANKMENT (FINAL)(ORD COMP)(TY B)	BACKFILL (TY A)	PROOF ROLLING	FL BS (CMP IN PLC)(TY D GR 4) (6")	REWORK BS MTL (TY B) (8") (DENS CONT)	ASPH (AC-20-5 TR OR AC-20XP)	AGGR (TY-B GR-3)	FLEXIBLE PAVEMENT STRUCTURE REPAIR(6")	PLANE ASPH CONC PAV(0" TO 2")	RIPRAP (CONC)(5 IN)	RIPRAP (CONC)(6 IN)	RIPRAP (STONE PROTECTION) (12 IN)	D-GR HMA TY-D SAC-A PG64-22	D-GR HMA TY-D SAC-A PG64-22 (EXEMPT)	BONDING COURSE
PARKING LOTS		SY	CY	STA	HR	SY	SY	GAL	CY	SY	SY	CY	CY	CY	TON	TON	GAL
LOT Q	9,027.00			3.39	0.67	1003	1003	462	10						111		51
LOT R	4,752.00			2.17											59		27
LOT S	951.00			0.96											12		6
LOT T	1,281.00			1.12											16		8
LOT U	11,567.00			3.80									4		142		65
LOT V	3,150.00			1.65											39		18
LOT W	1,603.00			1.25											20		9
LOT X	1,748.00			1.34											22		10
LOT Y	6,449.00			3.61											79		36
LOT Z	2,997.00			4.64											37		17
LOT AA	600.00			0.93											8		4
LOT BB	1,558.00			1.06											20		9
LOT CC	6,095.00			1.98	0.45	678	678	312	7						75		34
LOT DD	4,373.00			2.65											54		25
LOT EE	6,527.00			4.41											80		37
LOT FF	6,277.00			2.62	0.47	698	698	322	7						77		35
LOT GG	7,961.00			3.22	0.59	885	885	408	9						98		45
LOT HH	6,808.00			2.39	0.50	757	757	349	8						84		38
LOT II	5,858.00			4.05	0.43	651	651	300	7						72		33
PROJECT SUBTOTAL		0	0	47.24	3.11	4672	4672	2153	48	0	0	0	4	0	1105	0	507
PROJECT TOTAL		653	50	667.95	8.38	12358	12358	5690	124	1731	134	12	12	7.40	15399	82	7011

ASPH: AC-20-5TR or AC-20XP @ 0.46 GAL/SY
 AGGR: GR 3 B OR L @ 1:105 CY/SY
 BONDING COURSE BASED ON 0.05 GAL/SY
 PROOF ROLLING BASED ON 5,000 SY/HR

**ITEM 3076-6071 IS FOR LEVEL UP AT INDICATED LOCATIONS

ROADWAY ITEMS								
PARK ROAD 20 MBGF	START	END	540	542	542	544	658	132
			6002	6001	6002	6001	6062	6003
			MTL W-BEAM GDFEN (STEEL POST)	REMOVE METAL BEAM GUARD FENCE	REMOVE TERMINAL ANCHOR SECTION	GUARDRAIL END TREATMENT (INSTALL)	INSTL DEL ASSM (D-SW) SZ 1(BRF) OF 2(BI)	EMBANKMENT (FINAL)(ORD COMP)(TY B)
LOCATION LT/RT			LF	LF	EA	EA	EA	CY
LT	9+69	14+09	350	450	2	2	6	13
RT	10+30	13+83	250	345	2	2	5	10
LT	15+57	23+30	662.5	760	2	2	9	25
RT	16+63	23+22	575	670	2	2	8	22
LT	28+05	33+12	425	520	2	2	6	16
RT	35+01	40+00	400	495	2	2	6	15
LT	37+82	40+18	137.5	240	2	2	3	6
RT	41+43	43+06	75	166	2	2	3	3
LT	41+63	44+76	212.5	306	2	2	4	8
RT	55+47	58+12	175	276	2	2	4	7
RT	66+37	68+13	75	172	2	2	3	3
RT	83+78	85+31		173	2		2	
PROJECT TOTAL			3337.5	4573	24	22	59	128

SUMMARY OF EROSION CONTROL ITEMS									
LOCATION	LENGTH	WIDTH		164	168	FERTILIZER 3-1-2 *	506	506	
		LEFT	RIGHT	6015	6001		6041	6043	
				STRAW/HAY MLCH SEED(PERM)(RURAL)(CLAY)	VEGETATIVE WATERING	LBS	BIODEG EROSN CONT LOGS (INSTL)(12")	BIODEG EROSN CONT LOGS (REMOVE)	
				SY	MG		LF	LF	
ROADWAYS	LF								
PARK ROAD 20	11,839.00	2.00	2.00	5,262	32	518			
ARMADILLO HILL	5,863.00	2.00	2.00	2,606	16	256			
ARMADILLO HILL CAMP PULL-INS	1,882.00	2.00	2.00	837	6	82			
BOAT DOCK ROAD	331.00	2.00	2.00	148	1	14			
BOIS D'ARC RIDGE	4,356.00	2.00	2.00	1,936	12	191			
BOIS D'ARC RIDGE RV PULL-THROUGHS	5,836.00	2.00	2.00	2,594	16	255			
CEDAR HOLLOW	3,434.00	2.00	2.00	1,527	10	150			
DEER HAVEN & YACHT CLUB	10,610.00	2.00	2.00	4,716	29	464			
DEER HAVEN CAMP PULL-INS	947.00	2.00	2.00	421	3	41			
ELM POINT EAST	1,522.00	2.00	2.00	677	5	67			
ELM POINT WEST & OVERFLOW PARKING	3,345.00	2.00	2.00	1,487	9	146			
ELM POINT WEST CAMP PULL-INS	935.00	2.00	2.00	416	3	41			
FOSSIL RIDGE	2,524.00	2.00	2.00	1,122	7	110			
FOSSIL RIDGE CAMP PULL-INS	379.00	2.00	2.00	169	2	17			
SOUTH COVE	2,348.00	2.00	2.00	1,044	7	103			
MIDCOVE ROAD	2,128.00	2.00	2.00	946	6	93	1196	1196	
PROJECT TOTAL				25,908	164	2,548	1,196	1,196	

* FOR CONTRACTORS INFORMATION ONLY; 2 CYCLES AT 50 LBS. NITROGEN PER ACRE AT 21-7-14 (NPK) ANALYSIS = 0.0492 LBS/SY/CYCLE
 WATERING: BASED ON 2 APPLICATIONS, 0.5" RAINFALL EQUIVALENT = 0.003 MG/SY/CYCLE

ROADWAY ITEMS		
LOCATION	5150	5150
	6001	6002
	PRECAST CONCRETE WHEEL STOPS	MOVE AND RESET PRECAST CONC WHEEL STOPS
	EA	EA
EISENHOWER STATE PARK	237	238
PROJECT TOTAL	237	238

SIGNING ITEMS			
LOCATION	644	644	
	6058	6076	
	IN SM RD SN SUP&AM TYTWT(1)UB (P)	REMOVE SM RD SN SUP&AM	
	EA	EA	
LOT A @ HQ (ADA)	2	2	
PROJECT TOTALS	2	2	

WORKZONE TRAFFIC CONTROL ITEMS			
LOCATION	6185	6185	
	6002	6003	
	TMA (STATIONARY)	TMA (MOBILE OPERATION)	
	DAY	HR	
EISENHOWER STATE PARK	124	160	
PROJECT TOTALS	124	160	



EISENHOWER STATE PARK
QUANTITY SUMMARIES

DATE: 11/3/2022 3:59:55 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\0901-19-176.etc\Submit\95% Plans\DGNS\011 QUANTITY SUMMARIES.dgn

SUMMARY OF PAVEMENT MARKING ITEMS									
LOCATION	LENGTH	666	666	666	666	6047	662	666	
		6302	6308	6041	6314	6065	6111	6053	
RE PM W/RET REQ TY I (W)4"(SLD) (090MIL)	RE PM W/RET REQ TY I (W)6"(SLD) (090MIL)	REFL PAV MRK TY I (W)12"(SLD) (090MIL)	RE PM W/RET REQ TY I (Y)4"(SLD) (090MIL)	PREFB PAV MK TY C (ACC PARK)	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	REFL PAV MRK TY I (W)(ARROW)(090MIL)			
PARK ROAD 20	LF	LF	LF	LF	LF	EA	EA	EA	
FROM TO				LT RT					
0+00 1+11	111.0			184 184			18		
4+03.4 40+12.5	3610.0			3610 3610			362		
41+35.2 43+25.6	191.0			191 191			20		
43+91.6 50+45.9	655.0			655 655			66		
51+49.9 54+25.4	276.0			276 276			28		
55+18.5 71+36.7	1619.0			1619 1619			162		
71+86.1 75+74.8	389.0			389 389			38		
76+43.7 82+17.9	575.0			575 575			58		
83+25.4 95+64.9	1240.0			1240 1240			124		
96+19 97+29.6	111.0			111 111			12		
97+85.6 100+13.6	228.0			228 228			22		
100+79.6 104+56.4	377.0			377 377			38		
105+63.5 111+85	622.0			622 622			62		
112+63.3 113+83.2	120.0			120 120			12		
114+69.3 116+24.3	155.0			155 155			16		
PARK ENTRANCE		295	144	45				3	
LOT A (& EXIT)		252				1			
LOT B									
LOT C		108							
LOT D		72							
LOT E		1134							
LOT F		180							
LOT G		576				1			
ARMADILLO HILL				10.5					
LOT H									
LOT I		72							
LOT J		180							
LOT K									
LOT L		795							
BOAT DOCK				20					
PROJECT SUBTOTAL		3664	144	75.5	10352	10352	2	1038	3

PAVEMENT MARKING ITEMS CONTINUED									
LOCATION	LENGTH	666	666	666	666	6047	662	666	
		6302	6308	6041	6314	6065	6111	6053	
RE PM W/RET REQ TY I (W)4"(SLD) (090MIL)	RE PM W/RET REQ TY I (W)6"(SLD) (090MIL)	REFL PAV MRK TY I (W)12"(SLD) (090MIL)	RE PM W/RET REQ TY I (Y)4"(SLD) (090MIL)	PREFB PAV MK TY C (ACC PARK)	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	REFL PAV MRK TY I (W)(ARROW)(090MIL)			
SOUTH COVE ROAD				10	LT RT				
LOT M									
LOT N									
LOT O									
LOT P									
LOT Q									
BOIS D'ARC RIDGE				10					
LOT R		252							
CEDAR HOLLOW				18					
LOT S		90							
DEER HAVEN				10					
LOT T		126							
LOT U		144						1	
LOT V		180							
LOT W									
LOT X									
LOT Y		162							
FOSSIL RIDGE				15					
LOT Z									
LOT AA									
LOT BB		90							
LOT CC									
ELM POINT EAST				18					
LOT DD									
ELM POINT WEST				18					
LOT EE									
MIDCOVE ROAD				10					
LOT FF									
LOT GG									
LOT HH									
LOT II		270							
PROJECT SUBTOTAL		1314		109				1	
PROJECT TOTAL		4978	144	184.5	10352	10352	3	1038	3

ROADWAY ITEMS												
PR20 ROAD REALIGNMENT	AREA (SQ. FT.)	100	110	132	134	216	247	251	316	316	3076	3084
		6002	6001	6003	6001	6001	6076	6028	6405	6415	6036	6001
PREPARING ROW	EXCAVATION (ROADWAY)	EMBANKMENT (FINAL)(ORD COMP)(TY B)	BACKFILL (TY A)	PROOF ROLLING	FL BS (CMP IN PLC)(TY D GR 4) (6")	REWORK BS MTL (TY B) (8") (DENS CONT)	ASPH (AC-20-5 TR OR AC-20XP)	AGGR (TY-B GR-3)	D-GR HMA TY-D SAC-A PG64-22	BONDING COURSE		
STA	CY	CY	STA	HR	SY	SY	GAL	CY	TON	GAL		
STA: 82+07.5 - 83+17.5	2,258.00	1.00	136.13	0.13	1.00	0.17	251	251	116	3	28	12.54
STA: 83+17.50 - 85+52.92	5,648.00	2.35	285.77	40.92	2.35	0.42	628	628	289	6	70	31.38
STA: 85+52.92 - 86+52.92	2,446.00	1.09	143.08	5.17	1.09	0.18	272	272	126	3	30	13.59
PROJECT TOTALS		4.44	564.98	46.22	4.44	0.77	1,151	1,151	531	12	128	57.51

ROADWAY ITEMS			
PR20 ROAD REALIGNMENT	540	544	529
	6002	6001	6008
MTL W-BEAM GD FEN (STEEL POST)	GUARDRAIL END TREATMENT (INSTALL)	CONC CURB & GUTTER (TY II)	
LF	EA	LF	
STA: 83+47.5 - 86+52.5	205	2	
STA: 83+94.5 - 85+23.5			129
PROJECT TOTAL	205	2	129

ASPH: AC-20-5TR or AC-20XP @ 0.46 GAL/SY
 AGGR: GR 3 B OR L @ 1:105 CY/SY
 BONDING COURSE BASED ON 0.05 GAL/SY
 PROOF ROLLING BASED ON 5.000 SY/HR




EISENHOWER STATE PARK

QUANTITY SUMMARIES

©2023 SHEET 3 OF 3

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	11	

DATE: 11/9/2022 8:22:00 AM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSJ 0901-19-176. etc\Submittal\95% Plans\DGNS\012 SEQUENCE OF WORK.dgn

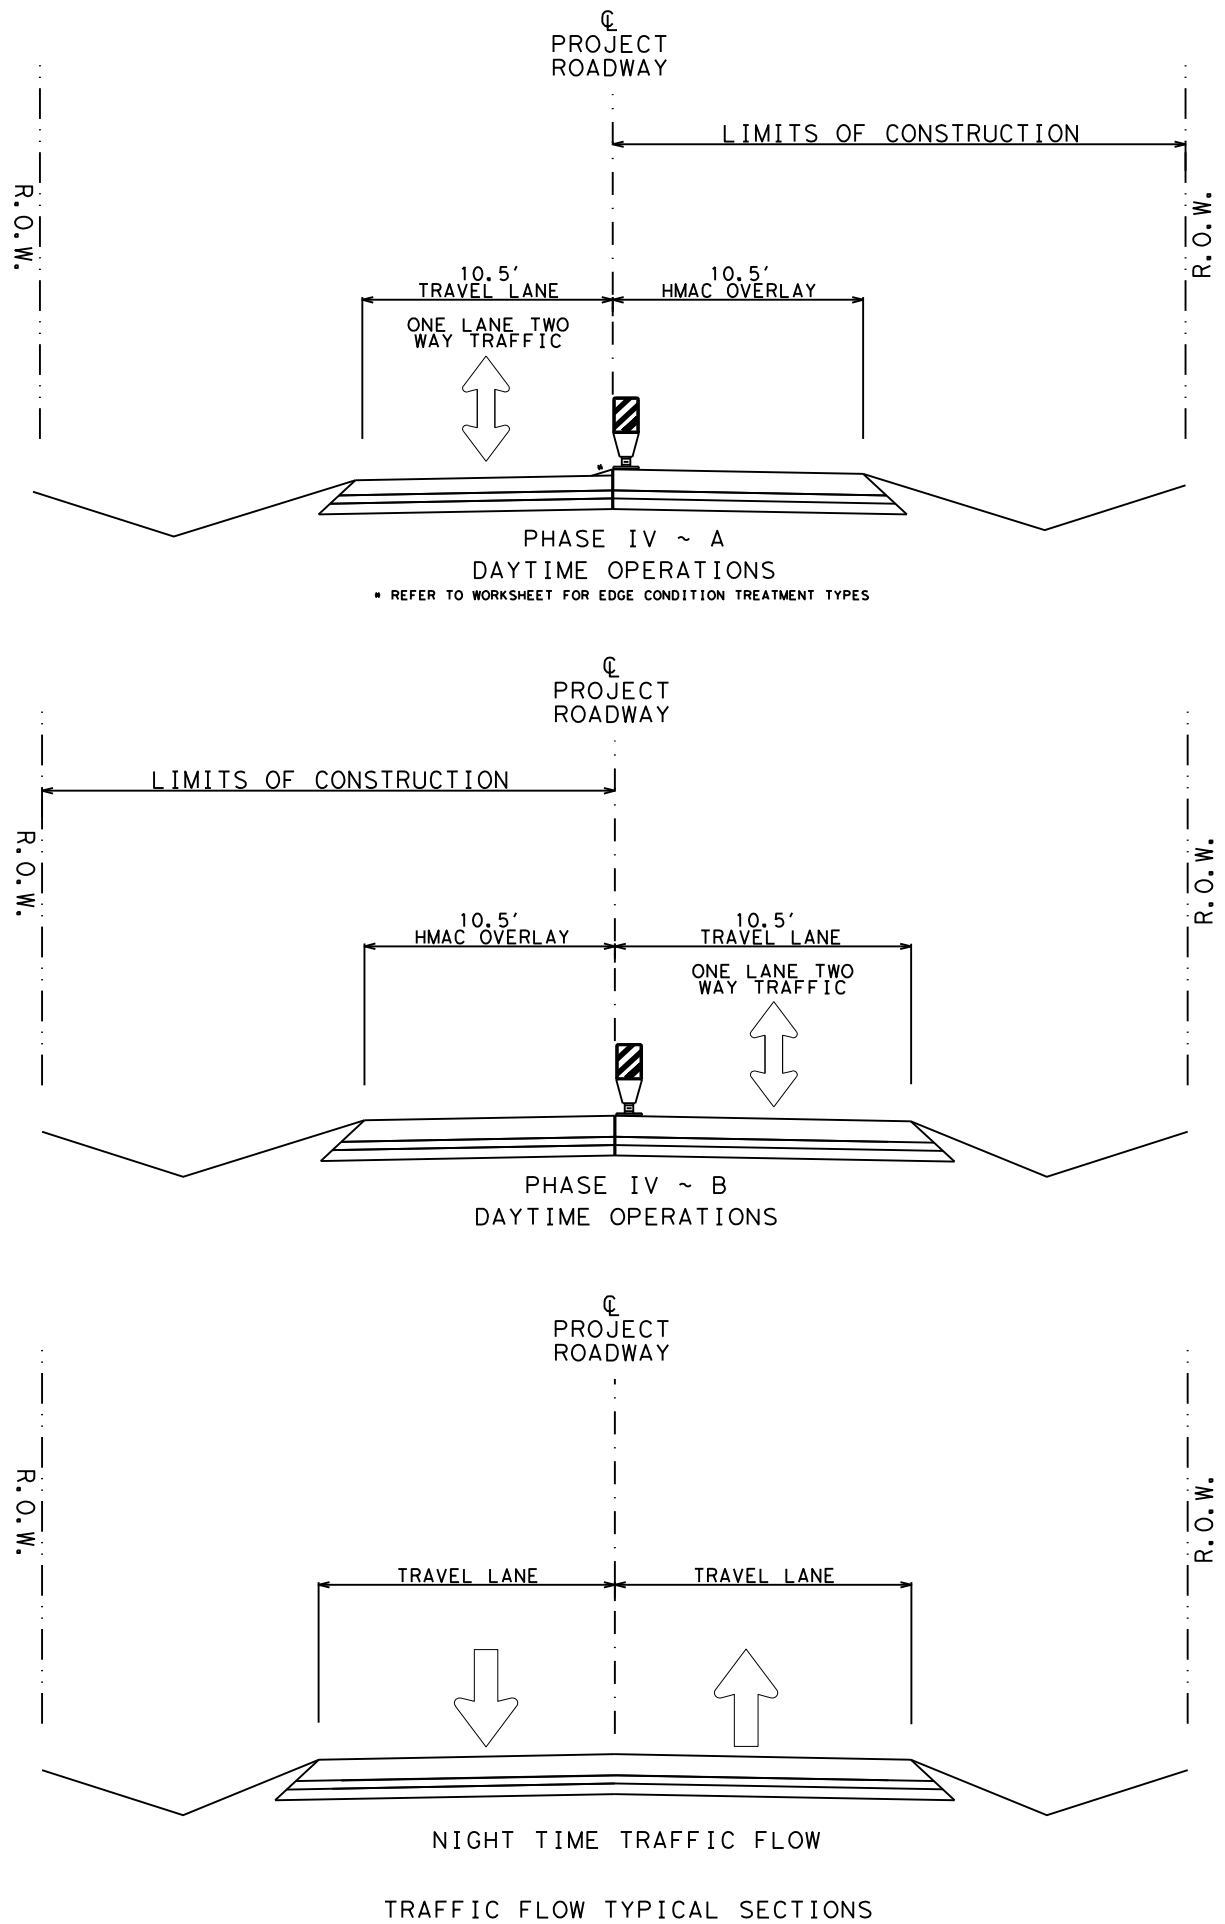

Phase I ~ Initial Traffic Control

Install project limit traffic control devices (TCD) per the BC standard sheets. Utilize the applicable TCP (1-1)-18 or TCP (1-2)-18 layout for TCD installation.

Phase II ~ Erosion Control

Install erosion control devices utilizing the applicable TCP (1-1)-18 layout or TCP (1-2b)-18.

Phase III ~ Park Side Road - Area Rehab & Spot Pavement Repair

Refer to the Traffic Flow Typical Sections for construction work area and traffic flow. Utilize TCP (1-2b)-18 with a pilot car as appropriate for rehab and pavement repair operations.

Phase IV ~ Park Road 20 Pavement Repair, Road Realignment, HMAC Levelup

Refer to the Traffic Flow Typical Sections for construction work area and traffic flow. Utilize TCP (1-2b)-18 with a pilot car as appropriate for construction operations. Prior to advancement to the next section, all backfilling and temporary striping must be completed and the section must be approved by the engineer.

Phase V ~ HMAC Overlay - Park Side Roads and Park Road 20

Refer to the Traffic Flow Typical Sections for construction work area and traffic flow. Utilize TCP (1-2b)-18 with a pilot car as appropriate for HMAC overlay operations. Complete HMAC overlay operations on the Park Side Roads first and then Park Road 20.

Phase VI ~ Final Pavement Markings

Install final pavement markings using TCP(3-1)-13 and TCP(3-3)-14.

Phase VII ~ MBGF Work

Remove and install MBGF utilizing standard TCP (1-2b)- 18.


Phase VIII ~ Backfill and Seeding Operations

Perform pavement backfill operations, sign installation and seeding, utilizing the appropriate TCP standard.

Phase VIII ~ Project Clean Up

Remove erosion control devices, construction debris and waste material, utilizing the appropriate TCP standard.

Notes: Prior to a specific construction operation, the traffic control standard specified for the construction phase in this narrative must be evaluated thoroughly for appropriateness. All traffic control operations must adhere to the Texas Manual on Uniform Traffic Control Devices (TMUTCD) and the applicable Traffic Control Standards. Construction phase order may be varied when approved by the Engineer. Submit a Work and Traffic Control Sequence plan to the Engineer for approval. Ensure that both travel lanes are open at night. Provide access to private property and Public Roads at all times. Provide pilot car during one lane/two way traffic operations. Road closures must be approved by the Engineer.



11.03.22

Monte R. Rater P.E.

EISENHOWER STATE PARK SEQUENCE OF WORK			
©2023 SHEET 1 OF 1			
CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	12	

DATE: 11/2/2022 4:20:57 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab\Projects\090119\76\etc\Submittals\090119\76\BC(1)-21.dgn
 No. warranty of any kind is made by TxDOT or any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format, etc. Submit to: \etc\Submittals\090119\76\BC(1)-21.dgn

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- The Engineer has the final decision on the location of all traffic control devices.
- Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

- Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS) "
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12




**BARRICADE AND CONSTRUCTION
GENERAL NOTES
AND REQUIREMENTS**

BC (1) -21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
4-03	7-13	0901	19	176	VARIOUS				
9-07	8-14	DIST	COUNTY	SHEET NO.					
5-10	5-21	PAR	GRAYSON	13					


DATE: 11/2/2022 4:20:58 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab\Projects\0901\0901.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of any information derived from this standard.

TYPICAL LOCATION OF CROSSROAD SIGNS

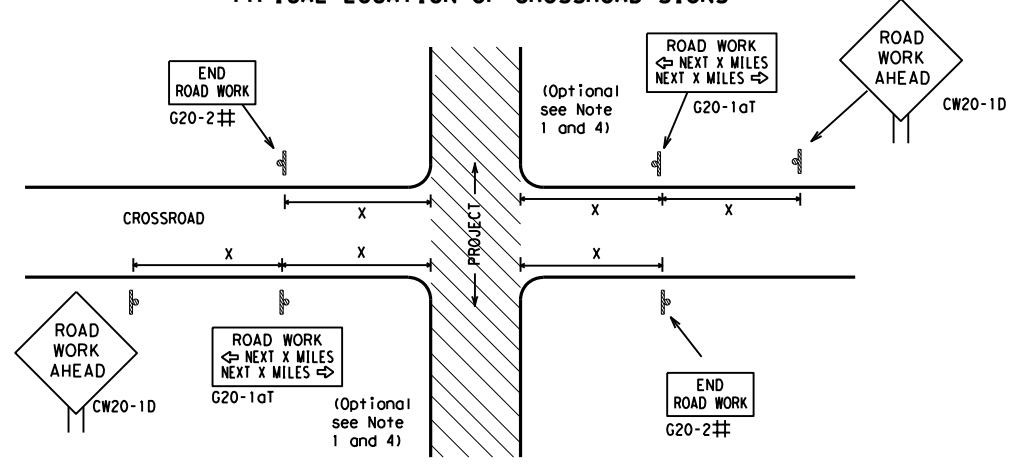

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
 - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
 - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
 - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
 - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
 - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

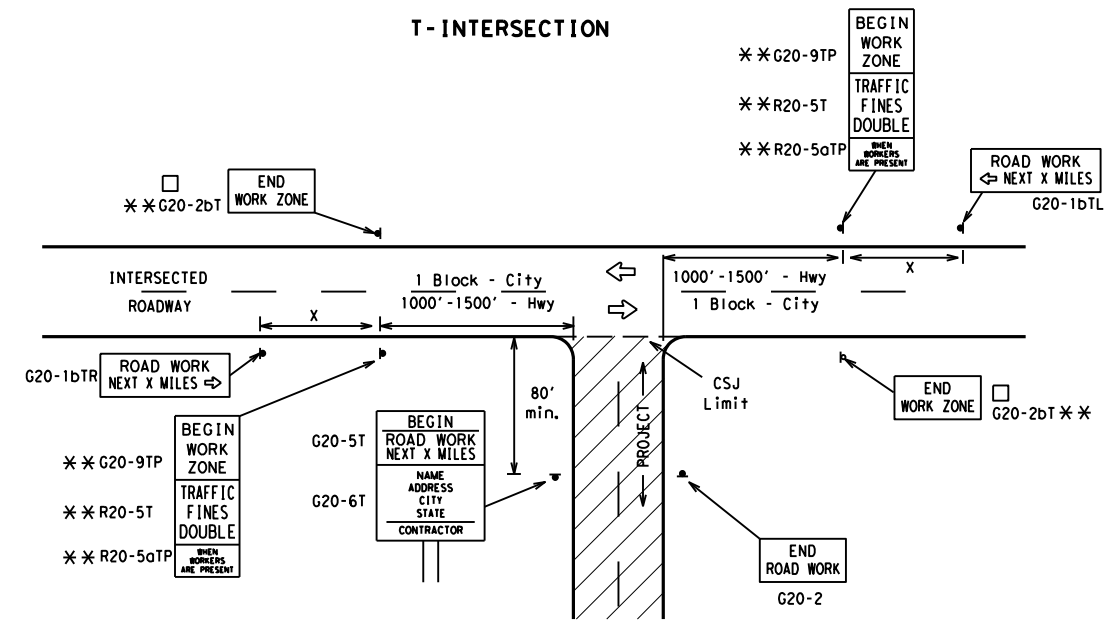

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{1,5,6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
			*	* ³


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

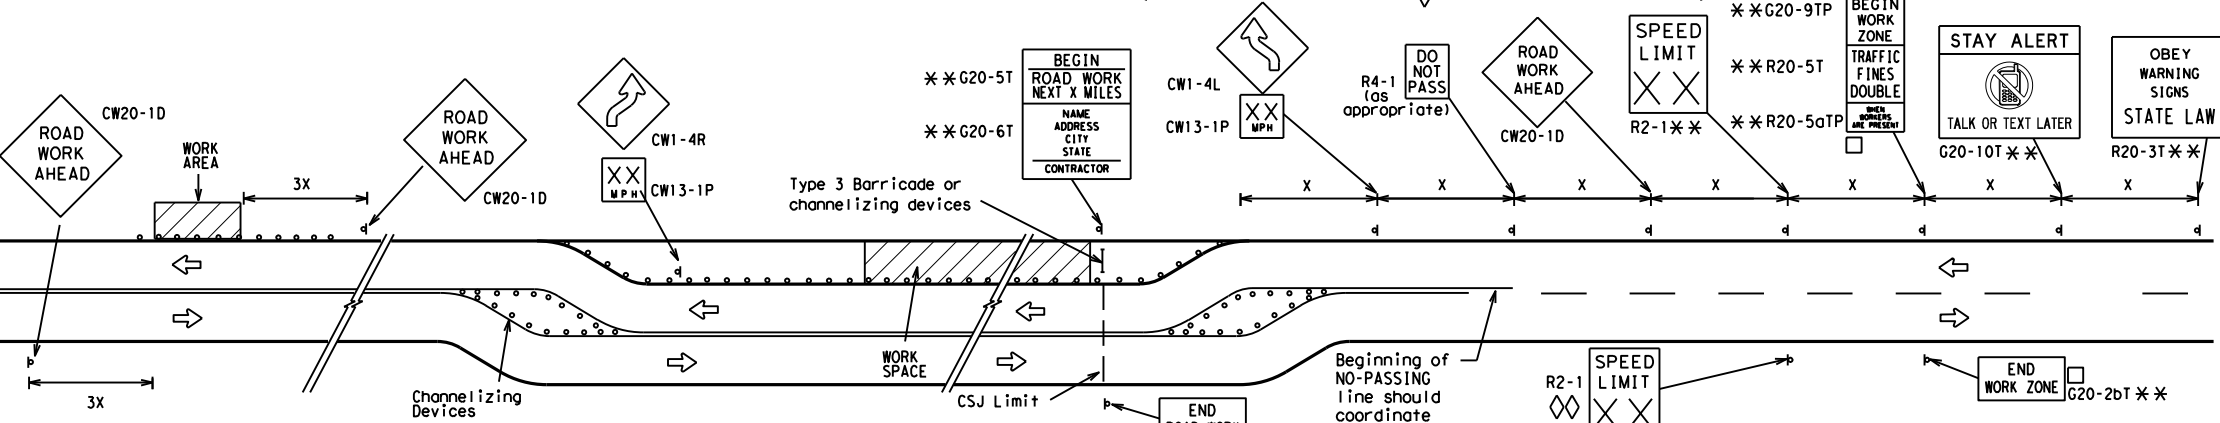

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

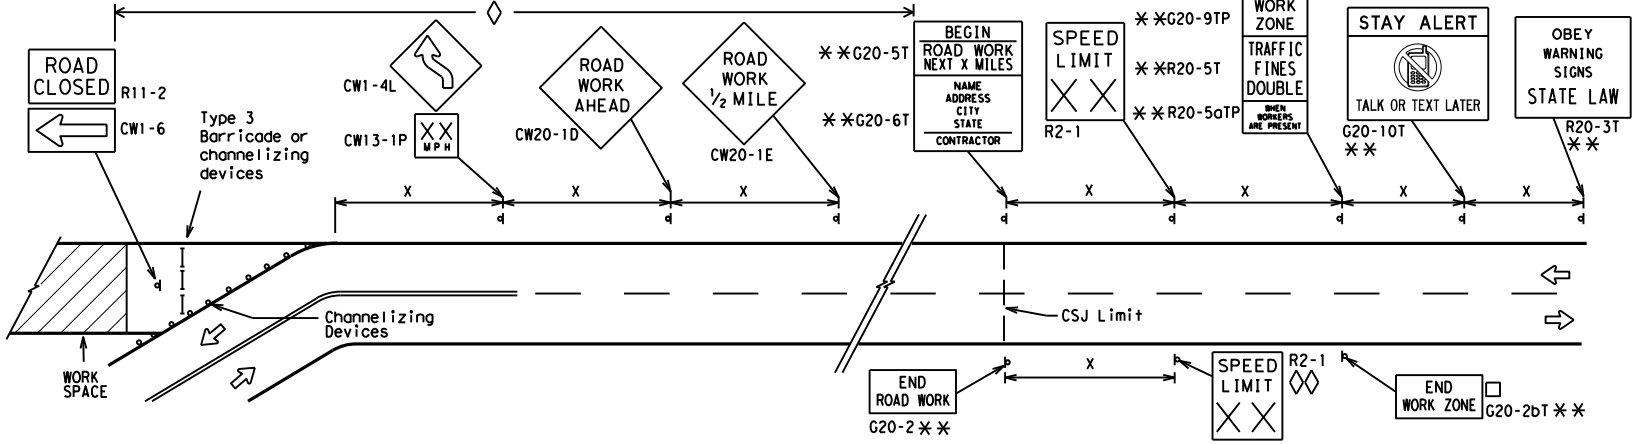

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "x" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
 - CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
 - Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
 - Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12

BARRICADE AND CONSTRUCTION PROJECT LIMIT


BC(2)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	PAR	GRAYSON	14	

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

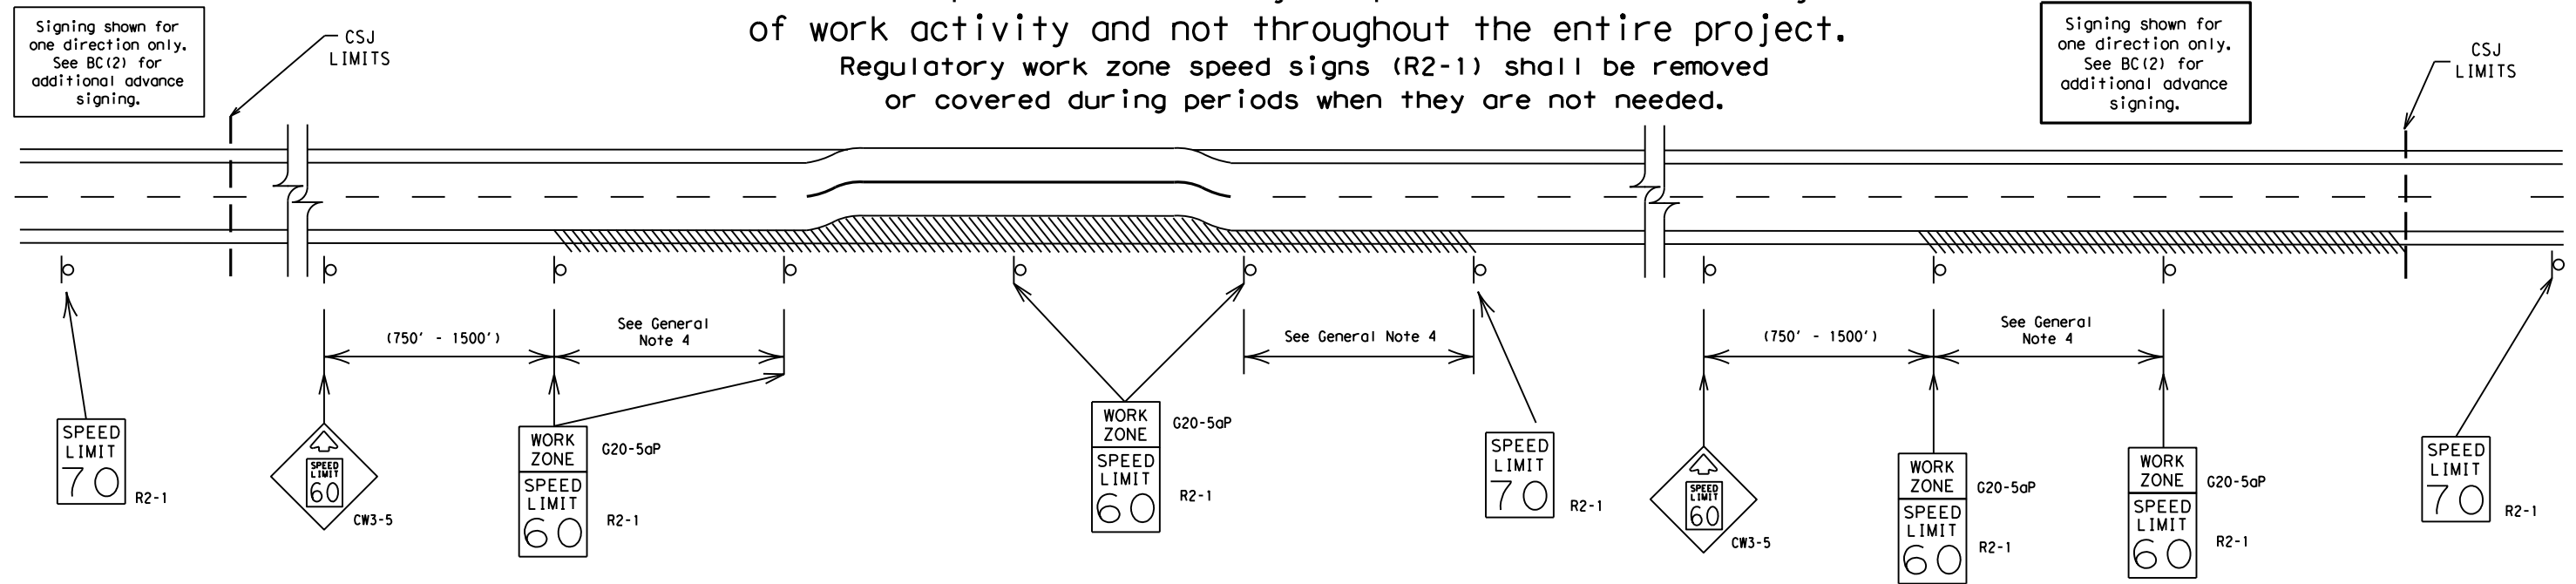

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Law enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.


DATE: 11/2/2022 4:20:58 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab\090119\090119.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of any information derived from this document.

SHEET 3 OF 12

		Traffic Safety Division Standard	
<h2>BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT</h2>			
<h3>BC (3) -21</h3>			
FILE:	bc-21.dgn	DW:	TxDOT
© TxDOT	November 2002	CONT:	19
REVISIONS		SECT:	176
9-07	8-14	JOB:	VARIOUS
7-13	5-21	DIST:	GRAYSON
		COUNTY:	
		SHEET NO.:	15

DATE: 11/2/2022 4:20:59 PM
 FILE: C:\Users\SWALKERT\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ 0901-19-176, etc\Submittal\95% Plans\DGNS\016_BC(4)-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

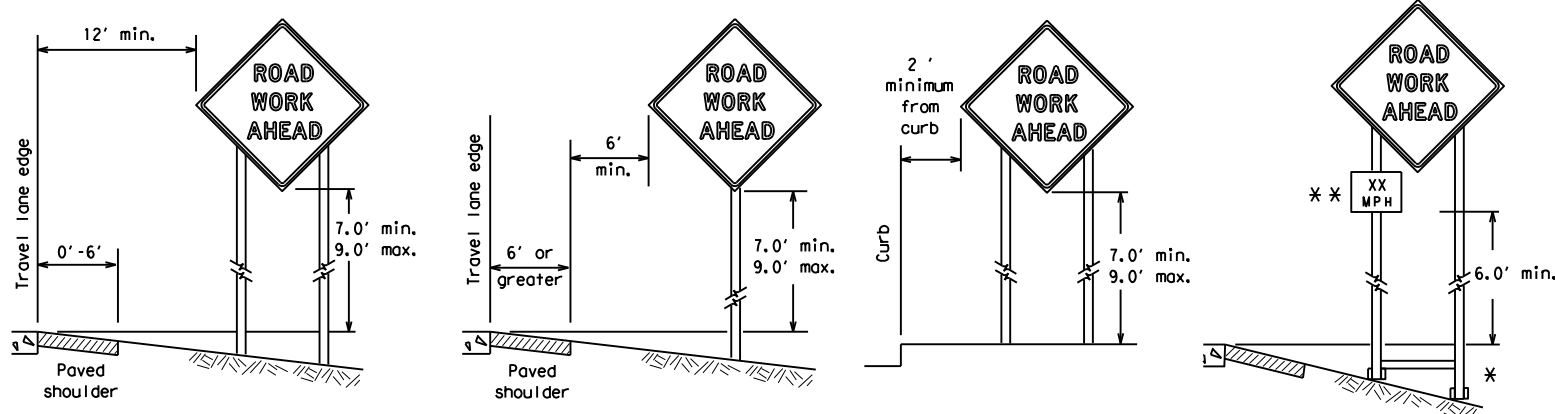

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

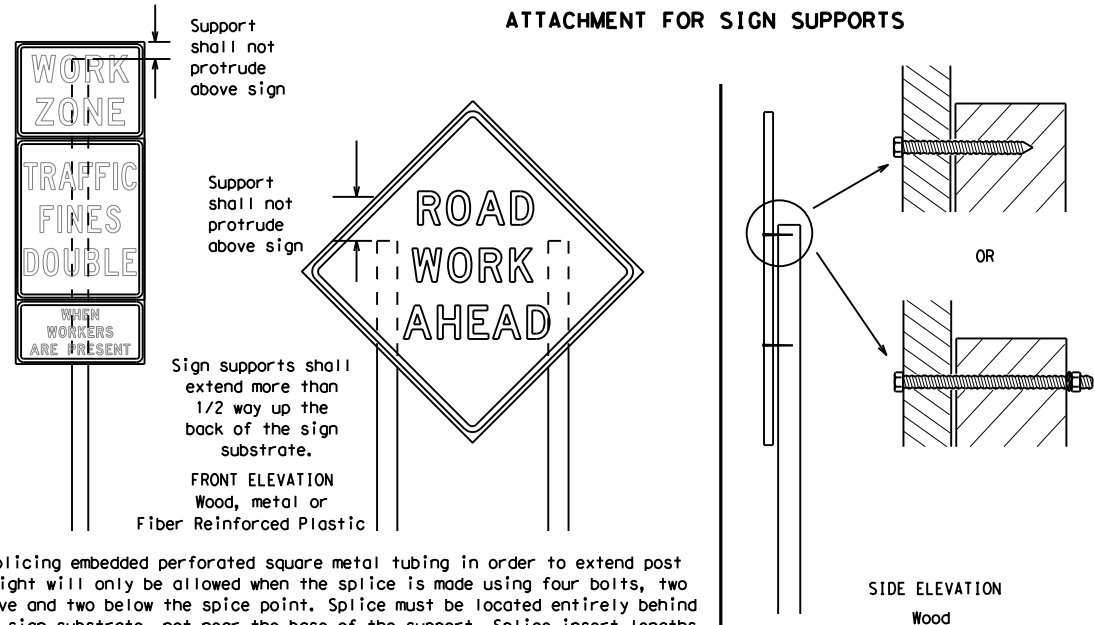


Nails shall NOT be allowed.
 Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflectORIZED when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

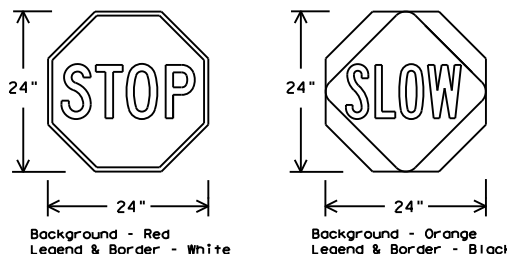

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short, duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.


FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12


		Traffic Safety Division Standard	
<h2>BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES</h2>			
<h3>BC (4) - 21</h3>			
FILE:	bc-21.dgn	DN:	TxDOT
© TxDOT	November 2002	CR:	TxDOT
REVISIONS	CONT	SECT	JOB
9-07 8-14	0901	19	176
7-13 5-21	DIST	COUNTY	SHEET NO.
	PAR	GRAYSON	16

DATE: 11/2/2022 4:20:59 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab Projects\CSU 0901-19-176, etc\Submittal\095% Plans\017 BC(5)-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats for incorrect results resulting from its use.

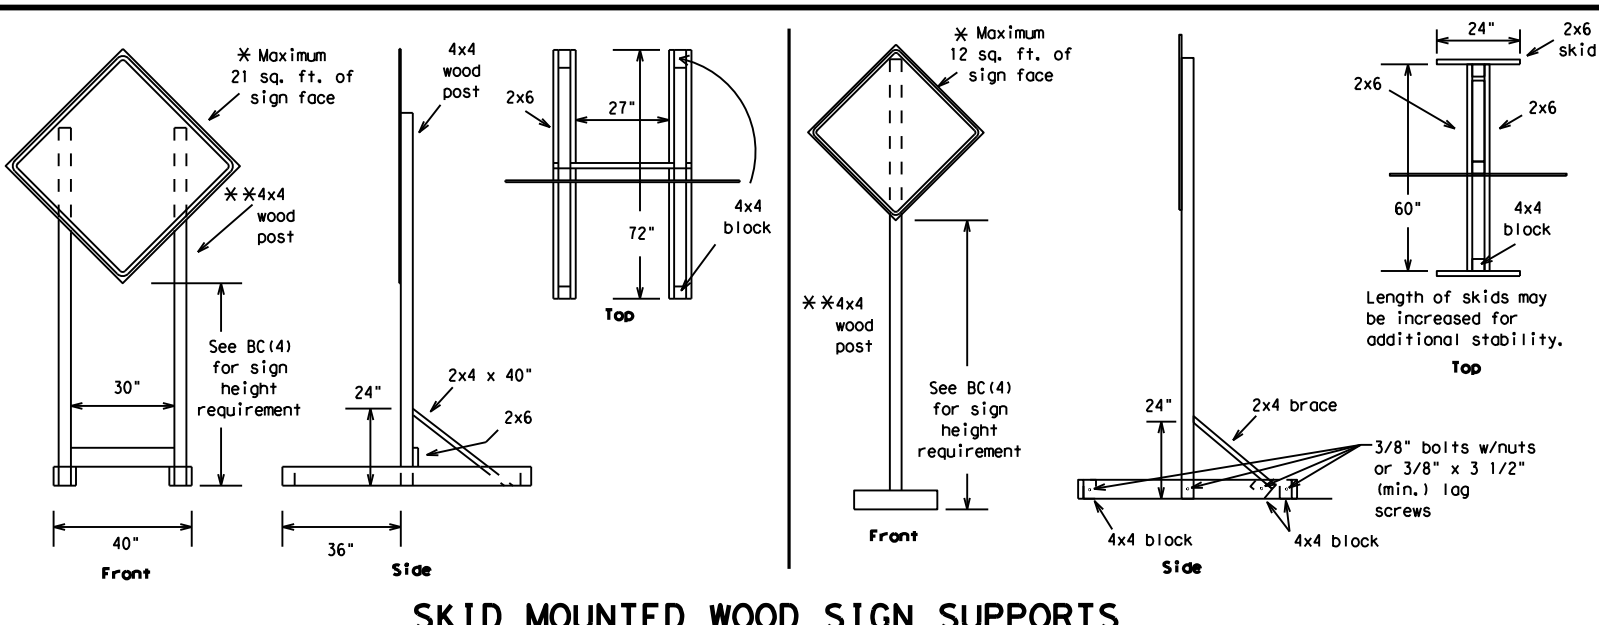


SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

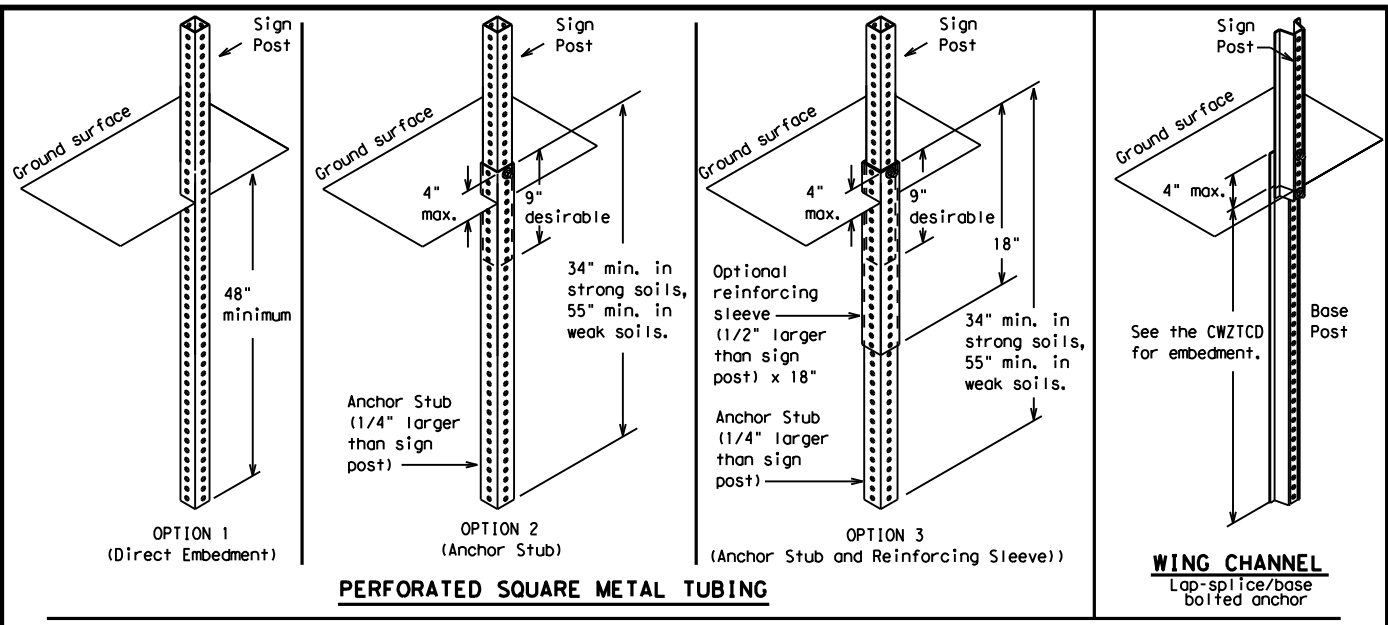


GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

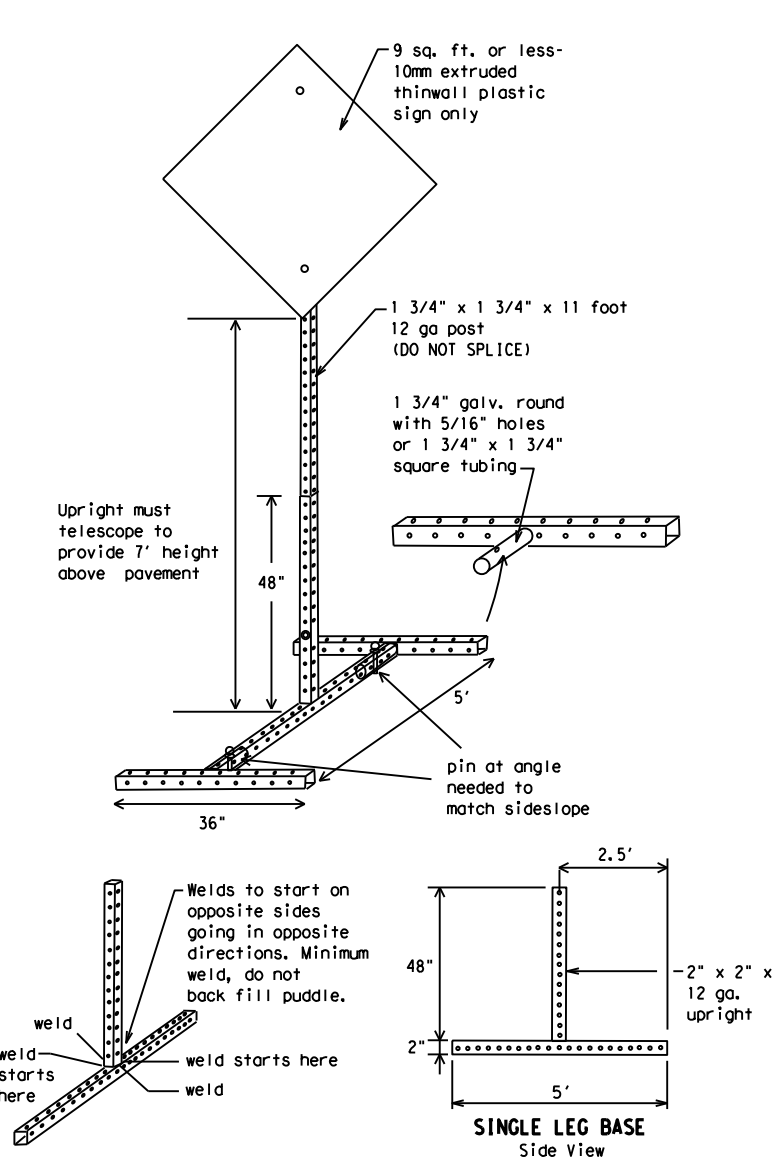

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

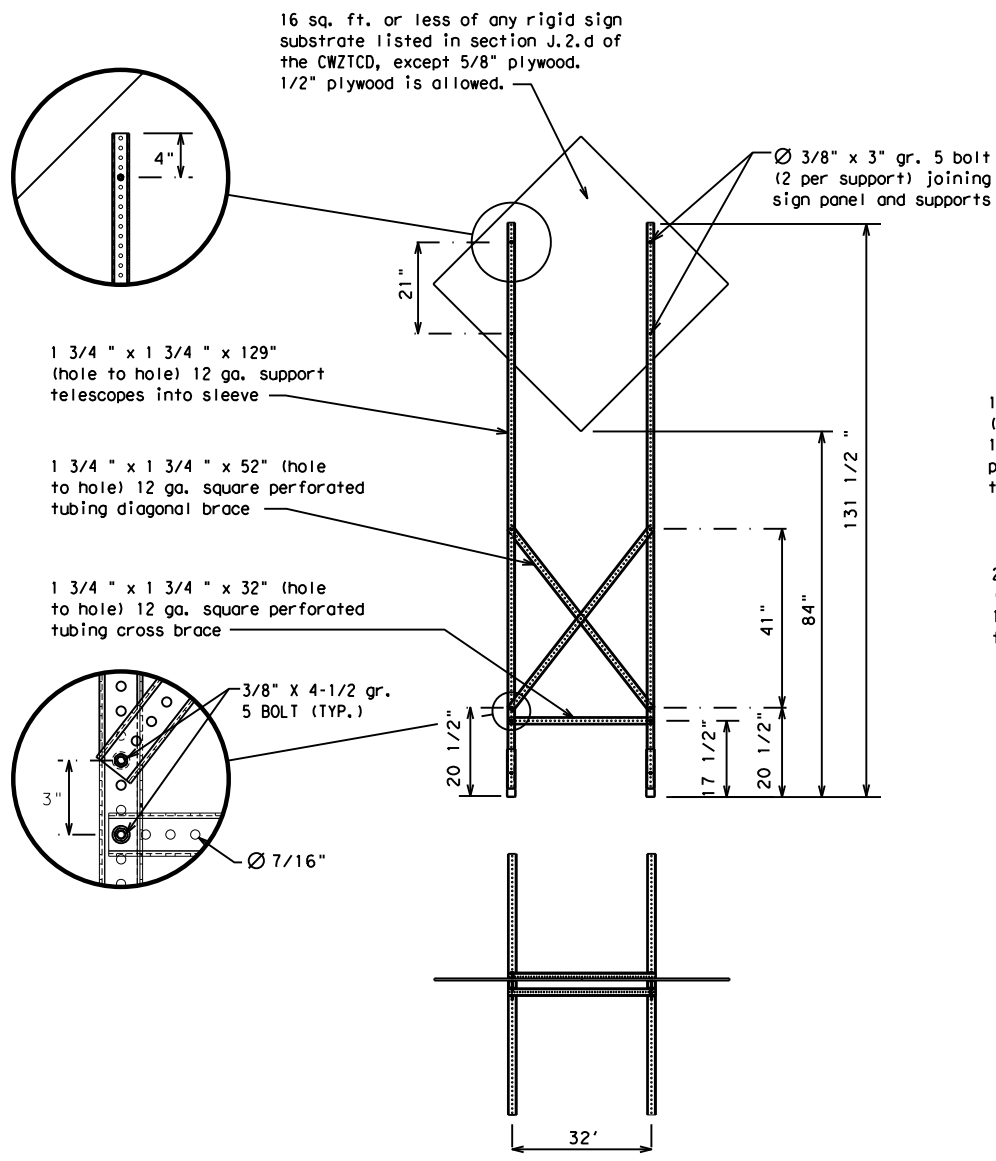

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
 - No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
 - When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
- * See BC(4) for definition of "Work Duration."
 - ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
 - ☐ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS	0901	19	176	VARIOUS					
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	PAR	GRAYSON	17					

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats for printing or for the resulting messages. Plans: D018-BC(6)-21.dgn
DATE: 11/2/2022 4:21:00 PM
FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab Projects_CSU_0901-19-176, etc.\Submit\1018-BC(6)-21.dgn

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canot	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	Hwy	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHS
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation # IH-number, US-number, SH-number, FM-number

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI
ROADWORK XXX FT
FLAGGER XXXX FT
RIGHT LN NARROWS XXXX FT
MERGING TRAFFIC XXXX FT
LOOSE GRAVEL XXXX FT
DETOUR X MILE
ROADWORK PAST SH XXXX
BUMP XXXX FT
TRAFFIC SIGNAL XXXX FT
ROAD REPAIRS XXXX FT
LANE NARROWS XXXX FT
TWO-WAY TRAFFIC XX MILE
CONST TRAFFIC XXX FT
UNEVEN LANES XXXX FT
ROUGH ROAD XXXX FT
ROADWORK NEXT FRI-SUN
US XXX EXIT X MILES
LANES SHIFT *

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE *

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM - X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS


- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

SHEET 6 OF 12

<h3>BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)</h3>			
<h2>BC (6) - 21</h2>			
FILE:	bc-21.dgn	DN:	TxDOT
© TxDOT	November 2002	CONT:	SECT:
REVISIONS	090119	JOB:	176
9-07 8-14		HIGHWAY:	VARIOUS
7-13 5-21		DIST:	COUNTY
		PAR:	GRAYSON
		SHEET NO.:	18


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 11/2/2022 4:21:00 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\0901-19-176, etc\Submittal\95% Plans\DGNS\019_BC(7)-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

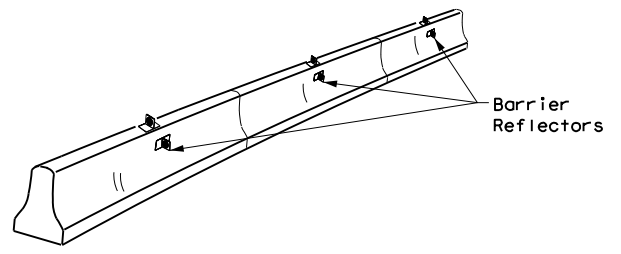


CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

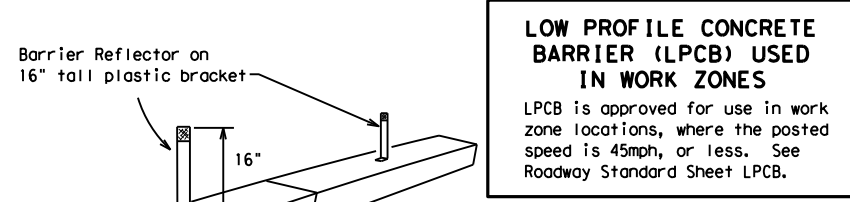

LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES
 LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

LOW PROFILE CONCRETE BARRIER (LPCB)

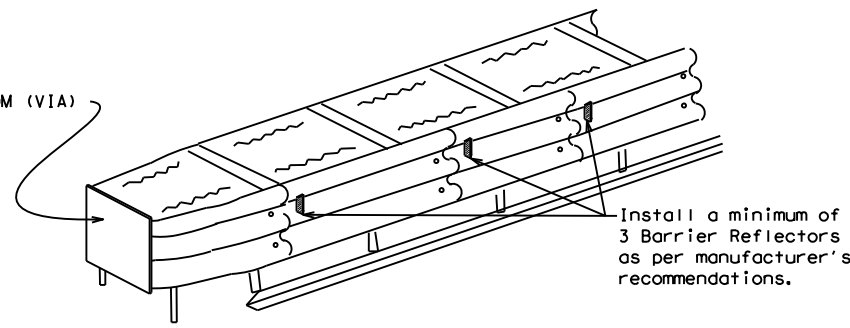

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES
 End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

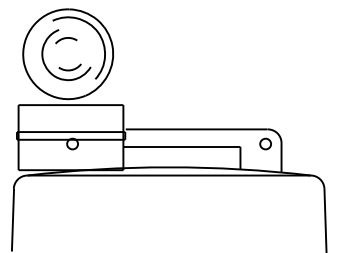


Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.

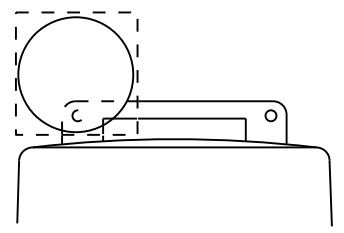

Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

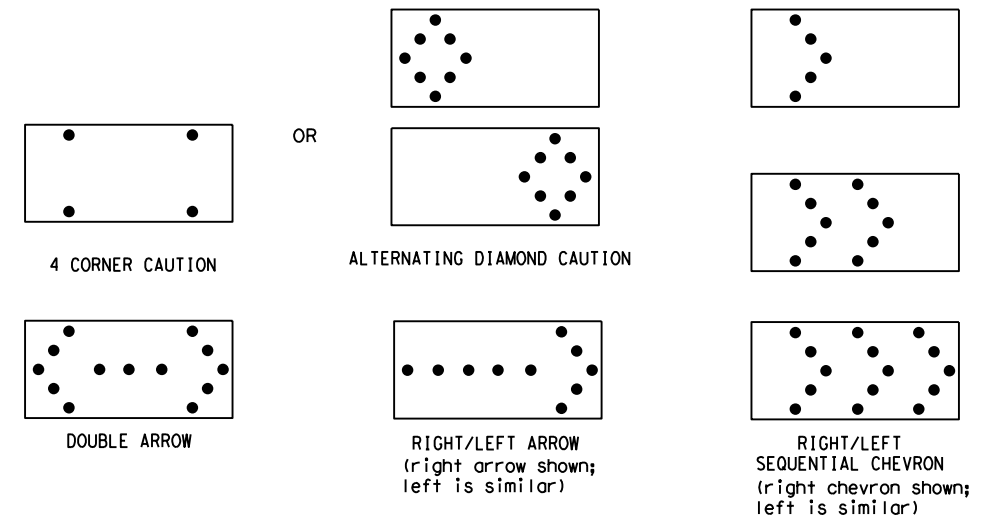

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.

BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC (7) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0901	19	176	VARIOUS				
9-07	8-14	DIST	COUNTY		SHEET NO.				
7-13	5-21	PAR	GRAYSON		19				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 11/2/2022 4:21:01 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ_0901-19-176, etc\Submittal\95% Plans\DGNS\020_BC(8)-21.dgn

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS




- Pre-qualified plastic drums shall meet the following requirements:
- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
 - The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
 - Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
 - Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
 - The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
 - The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
 - Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
 - Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
 - Drum body shall have a maximum unballasted weight of 11 lbs.
 - Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.


BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

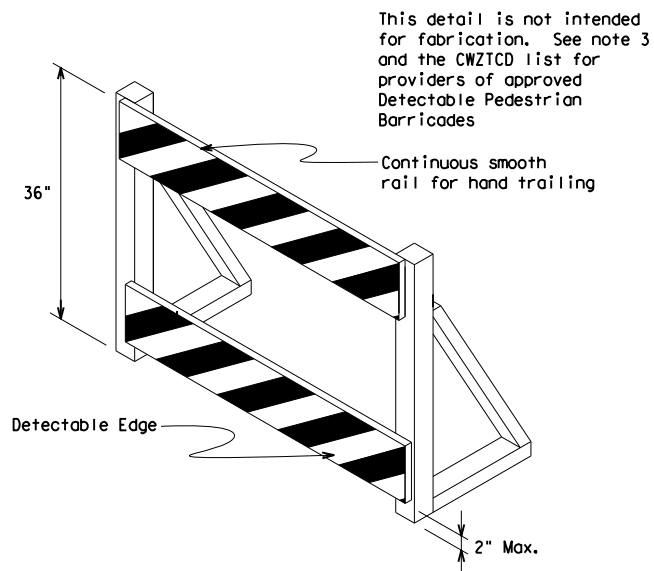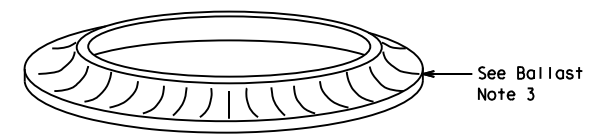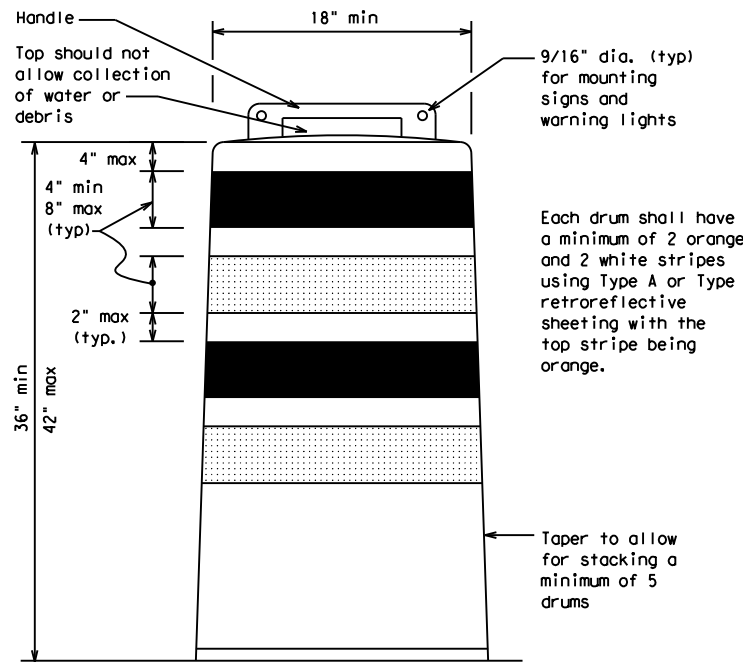


DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign
(Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane
Divider, Driveway sign D70a, Keep Right
R4 series or other signs as approved
by Engineer



12" x 24"
Vertical Panel
mount with diagonals
sloping down towards
travel way

Plywood, Aluminum or Metal sign
substrates shall NOT be used on
plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (8) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0901	19	176	VARIOUS				
4-03	8-14	DIST	COUNTY	SHEET NO.					
9-07	5-21	PAR	GRAYSON	20					
7-13									

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 11/2/2022 4:21:02 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\0901-19-176, etc\Submittal\95% Plans\DGNS\021_BC(9)-21.dgn

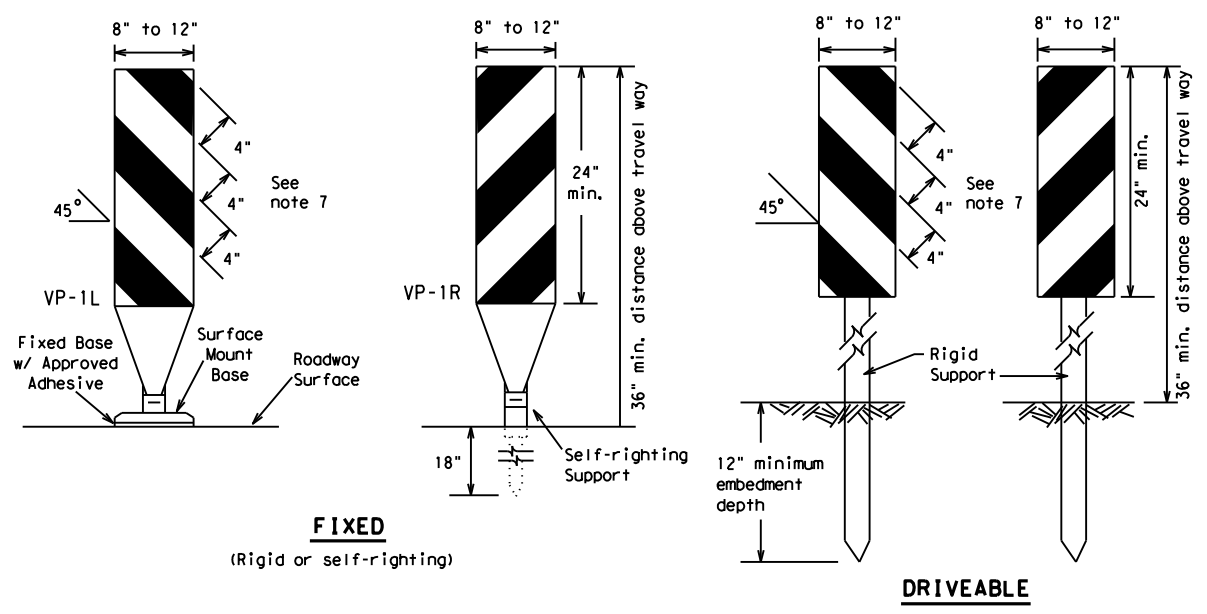

FIXED
(Rigid or self-righting)

DRIVEABLE




(Rigid or self-righting)

PORTABLE


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

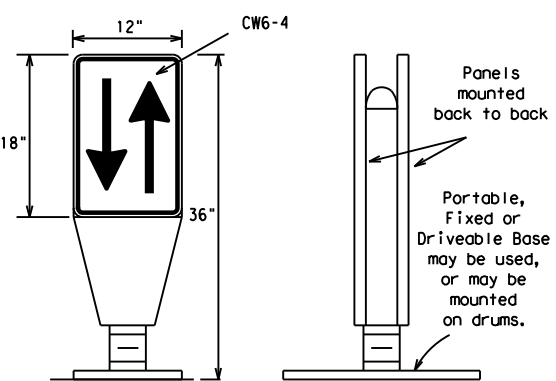

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)


- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

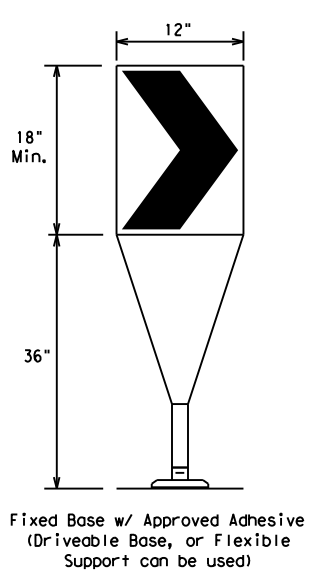

Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

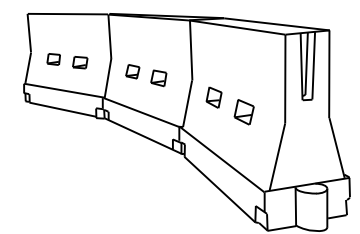

LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths * *			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

* * * Taper lengths have been rounded off.
 L=Length of Taper (FT.) W=Width of Offset (FT.)
 S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (9) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0901	19	176	VARIOUS				
9-07	8-14	DIST	COUNTY		SHEET NO.				
7-13	5-21	PAR	GRAYSON		21				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 11/2/2022 4:21:02 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ 0901-19-176, etc\Submittal\95% Plans\DGNS\022_BC(10)-21.dgn

TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL




TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

Each roadway of a divided highway shall be barricaded in the same manner.

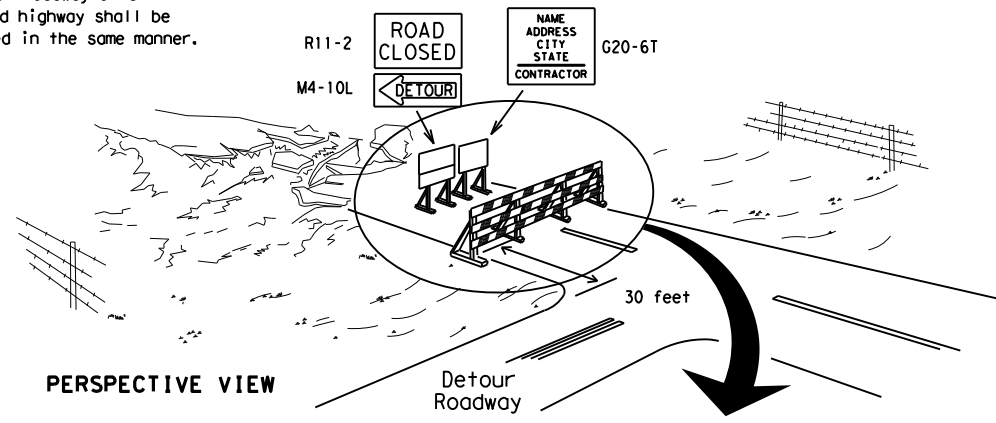

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

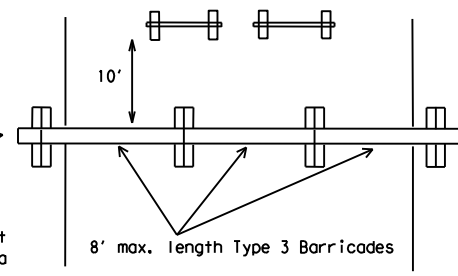


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

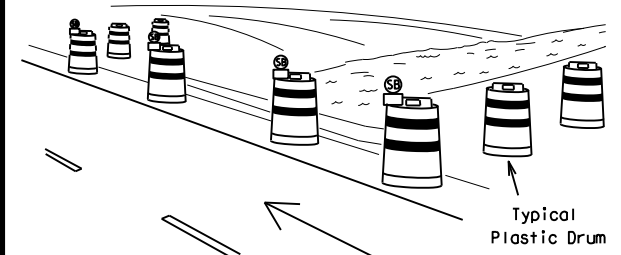

PERSPECTIVE VIEW

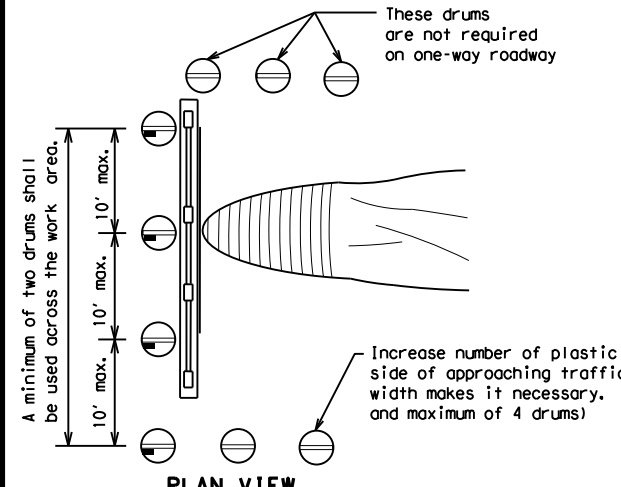


PLAN VIEW

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

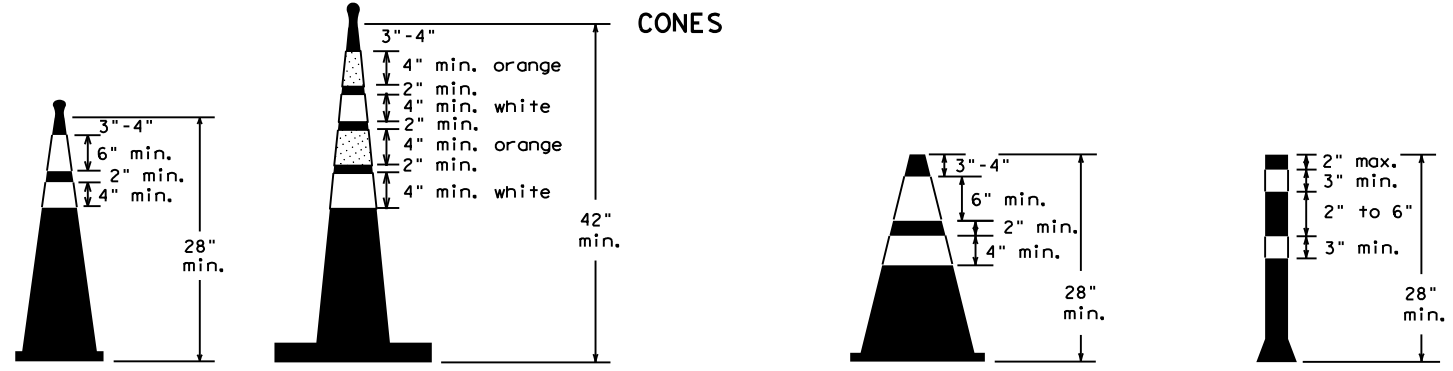


Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.

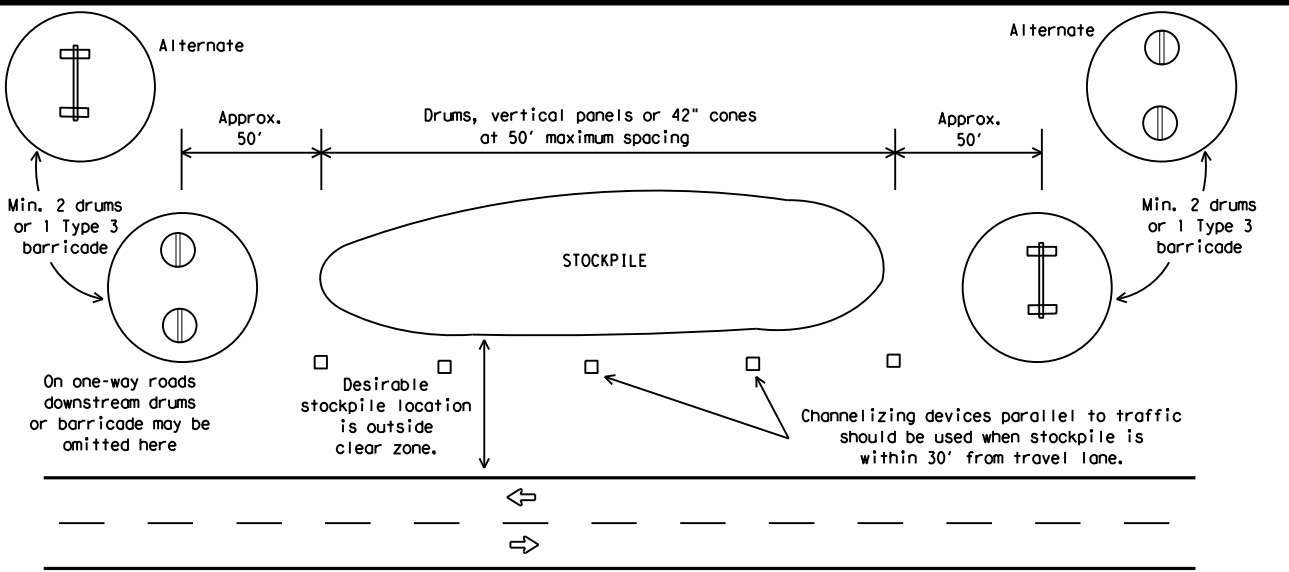

TRAFFIC CONTROL FOR MATERIAL STOCKPILES



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	OW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0901	19	176	VARIOUS				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	PAR	GRAYSON	22					

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

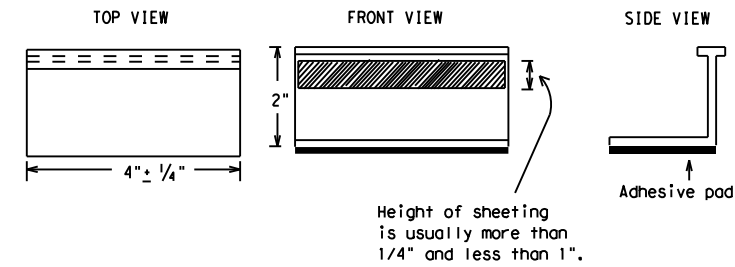

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS		0901	19	176
2-98	9-07	5-21		
1-02	7-13			
11-02	8-14			
	DIST	COUNTY	SHEET NO.	
	PAR	GRAYSON	23	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 11/2/2022 4:21:03 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\Projects\0901-19-176, etc\Submittal\95% Plans\023 BC(11)-21.dgn

PAVEMENT MARKING PATTERNS




REFLECTORIZED PAVEMENT MARKINGS - PATTERN A

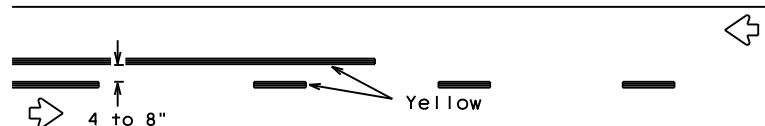


REFLECTORIZED PAVEMENT MARKINGS - PATTERN B

Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.

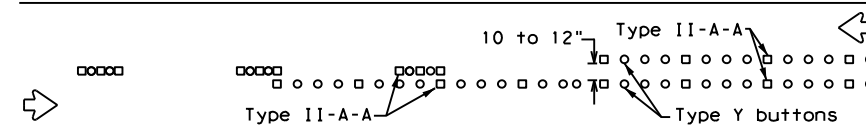

RAISED PAVEMENT MARKERS - PATTERN A

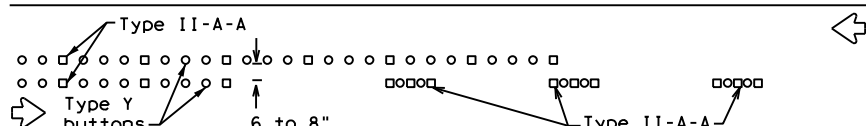


RAISED PAVEMENT MARKERS - PATTERN B

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS



REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.




RAISED PAVEMENT MARKERS

EDGE & LANE LINES FOR DIVIDED HIGHWAY




REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.



RAISED PAVEMENT MARKERS

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS



REFLECTORIZED PAVEMENT MARKINGS


Prefabricated markings may be substituted for reflectORIZED pavement markings.





RAISED PAVEMENT MARKERS

TWO-WAY LEFT TURN LANE


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

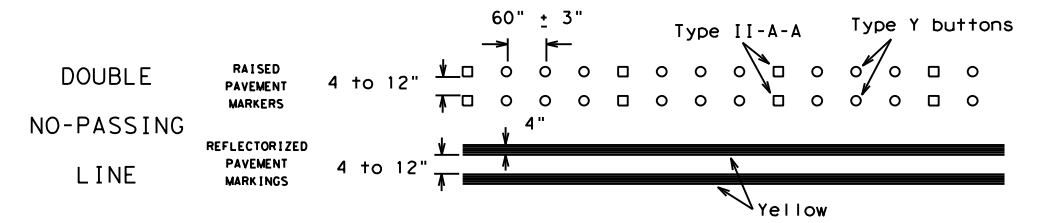


SOLID LINES

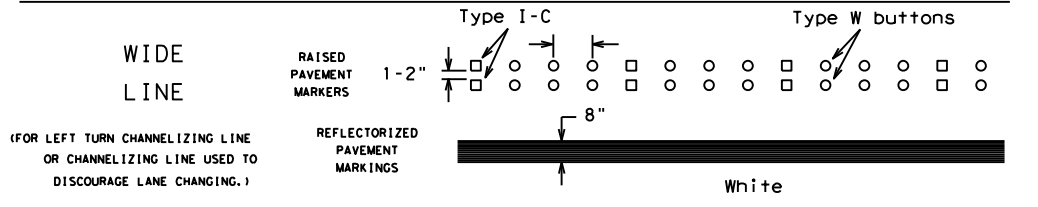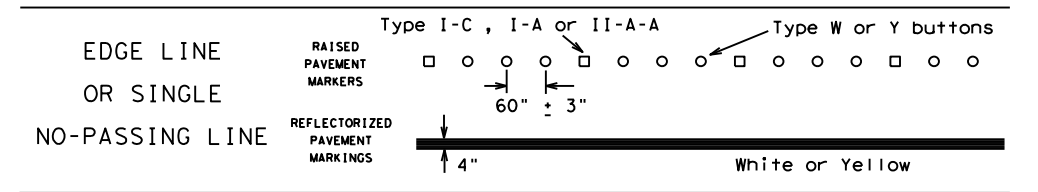

BROKEN LINES

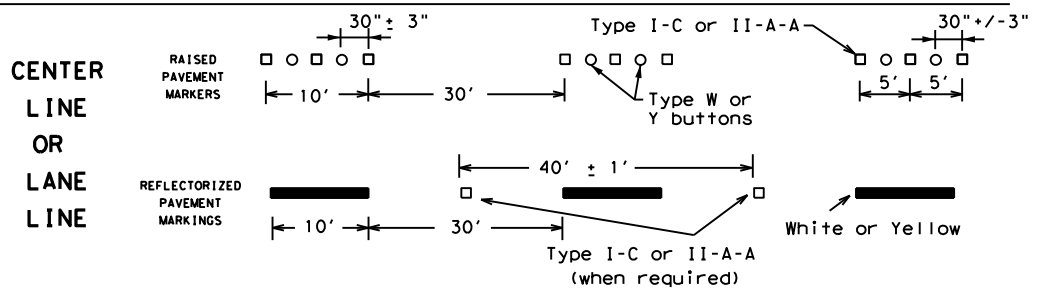


AUXILIARY OR LANEDROP LINE

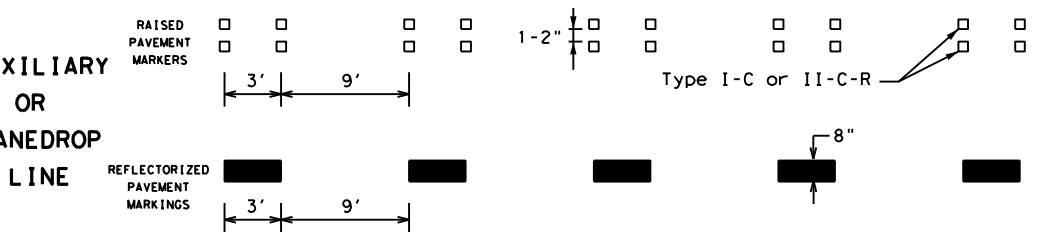

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

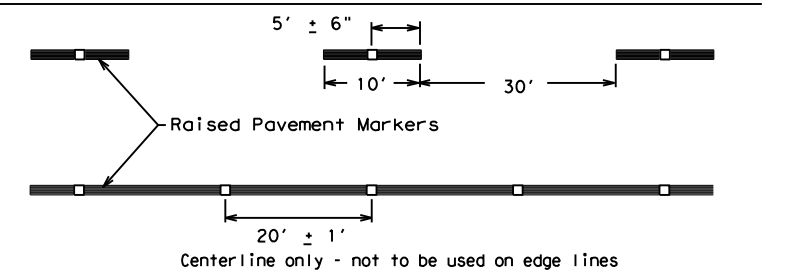

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21




Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT	CR: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	PAR	GRAYSON	24	
11-02 8-14				

DATE: 11/2/2022 4:21:03 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\0901-19-176, etc\Submittal\024_BC(12)-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information into a digital format or for the use of the information for any purpose other than that for which it was originally intended.

DATE: 11/2/2022 4:21:04 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-18-22\09-18-22.dgn

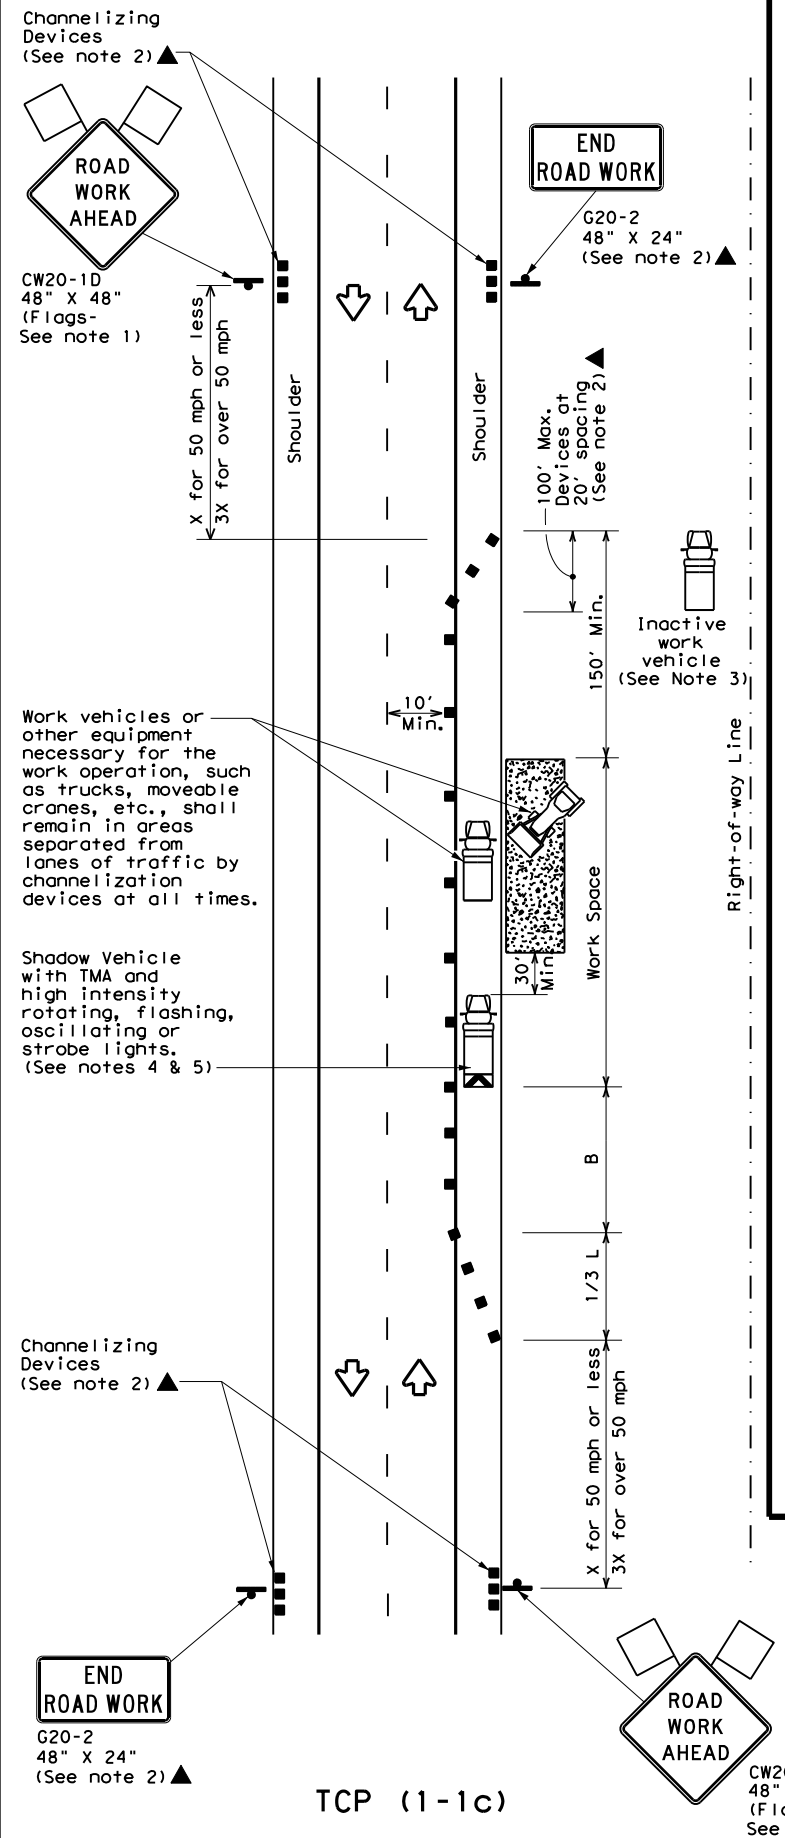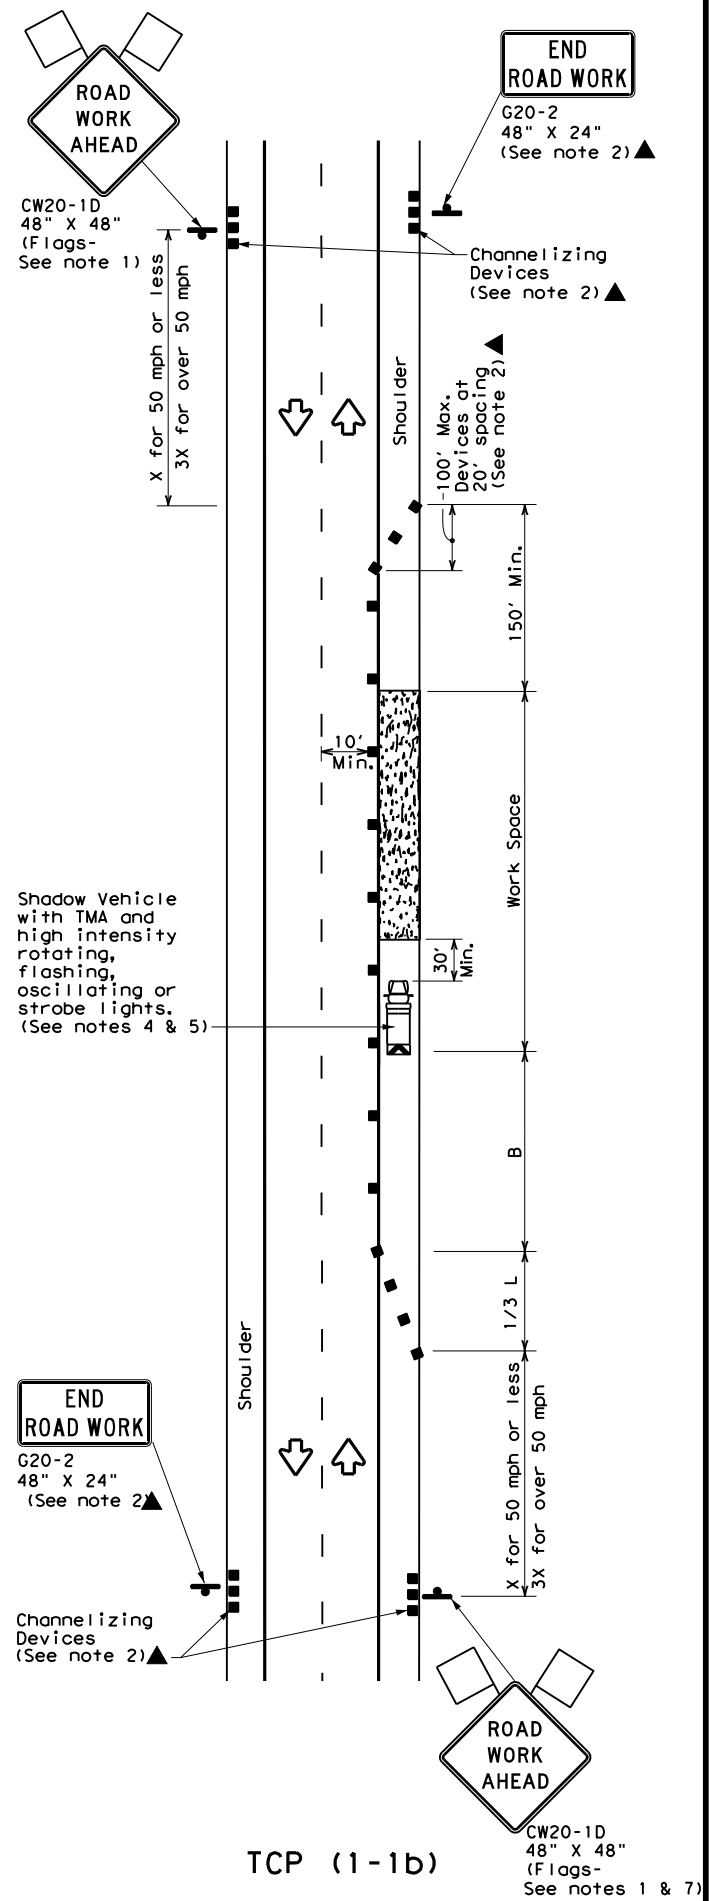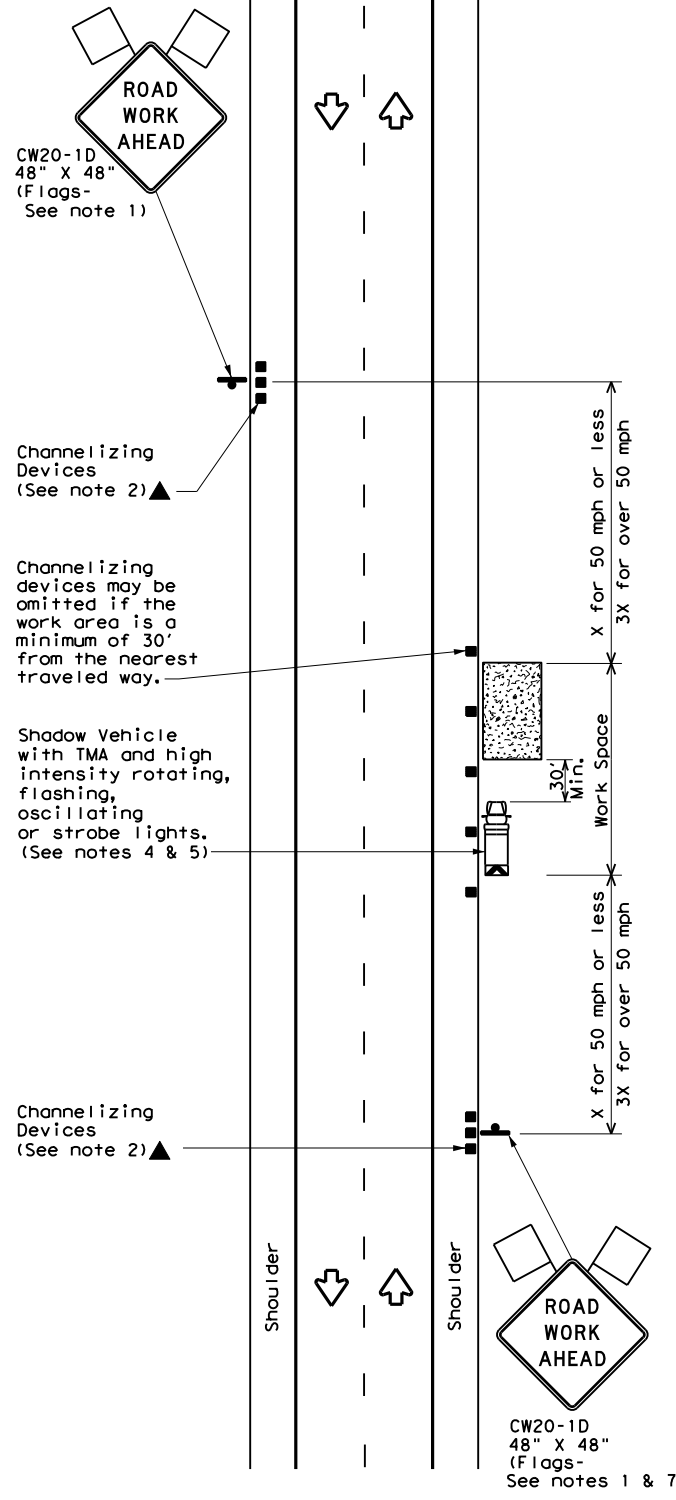

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * S	Formula L = WS / 60	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30		150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.



TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK

TCP (1-1) - 18

FILE: tcp1-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	PAR	GRAYSON	25	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any other project or for any other purpose. The user is responsible for its use.

DATE: 11/2/2022 4:21:04 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\01-18-2022\01-18-2022.dgn

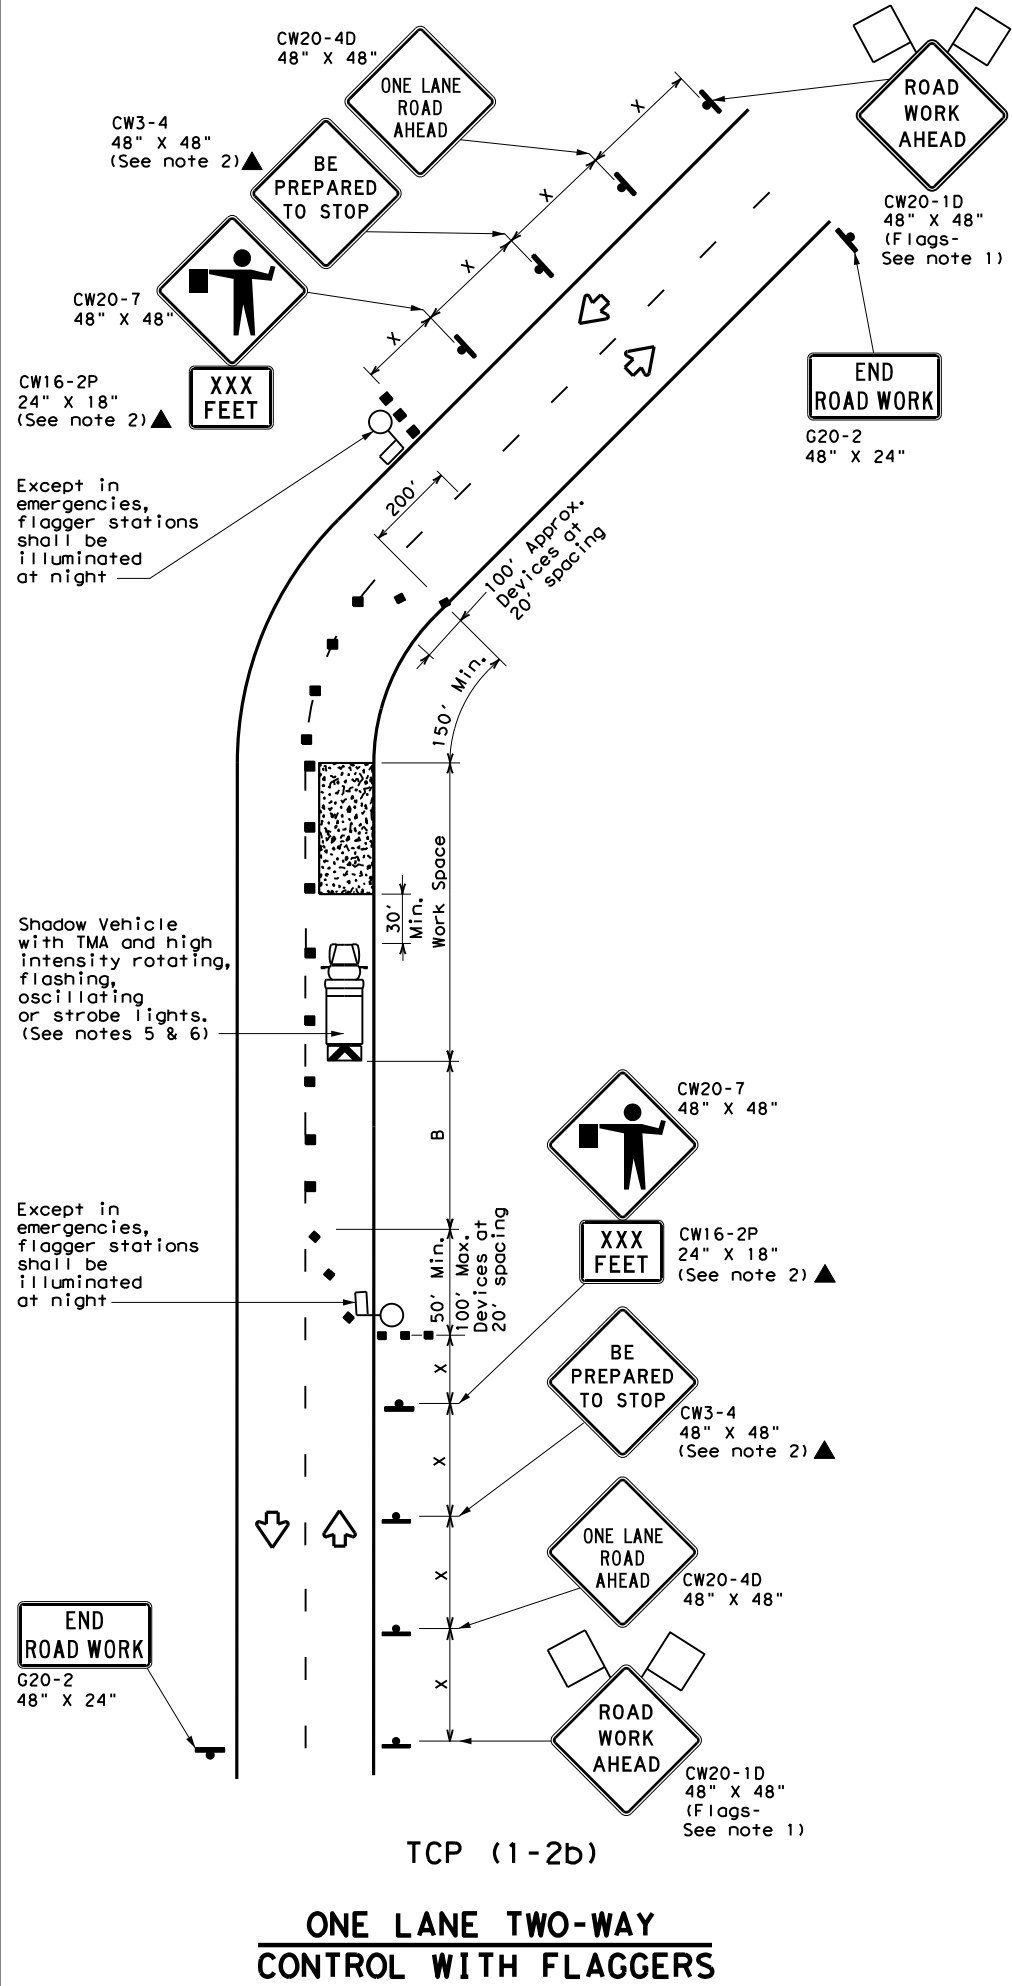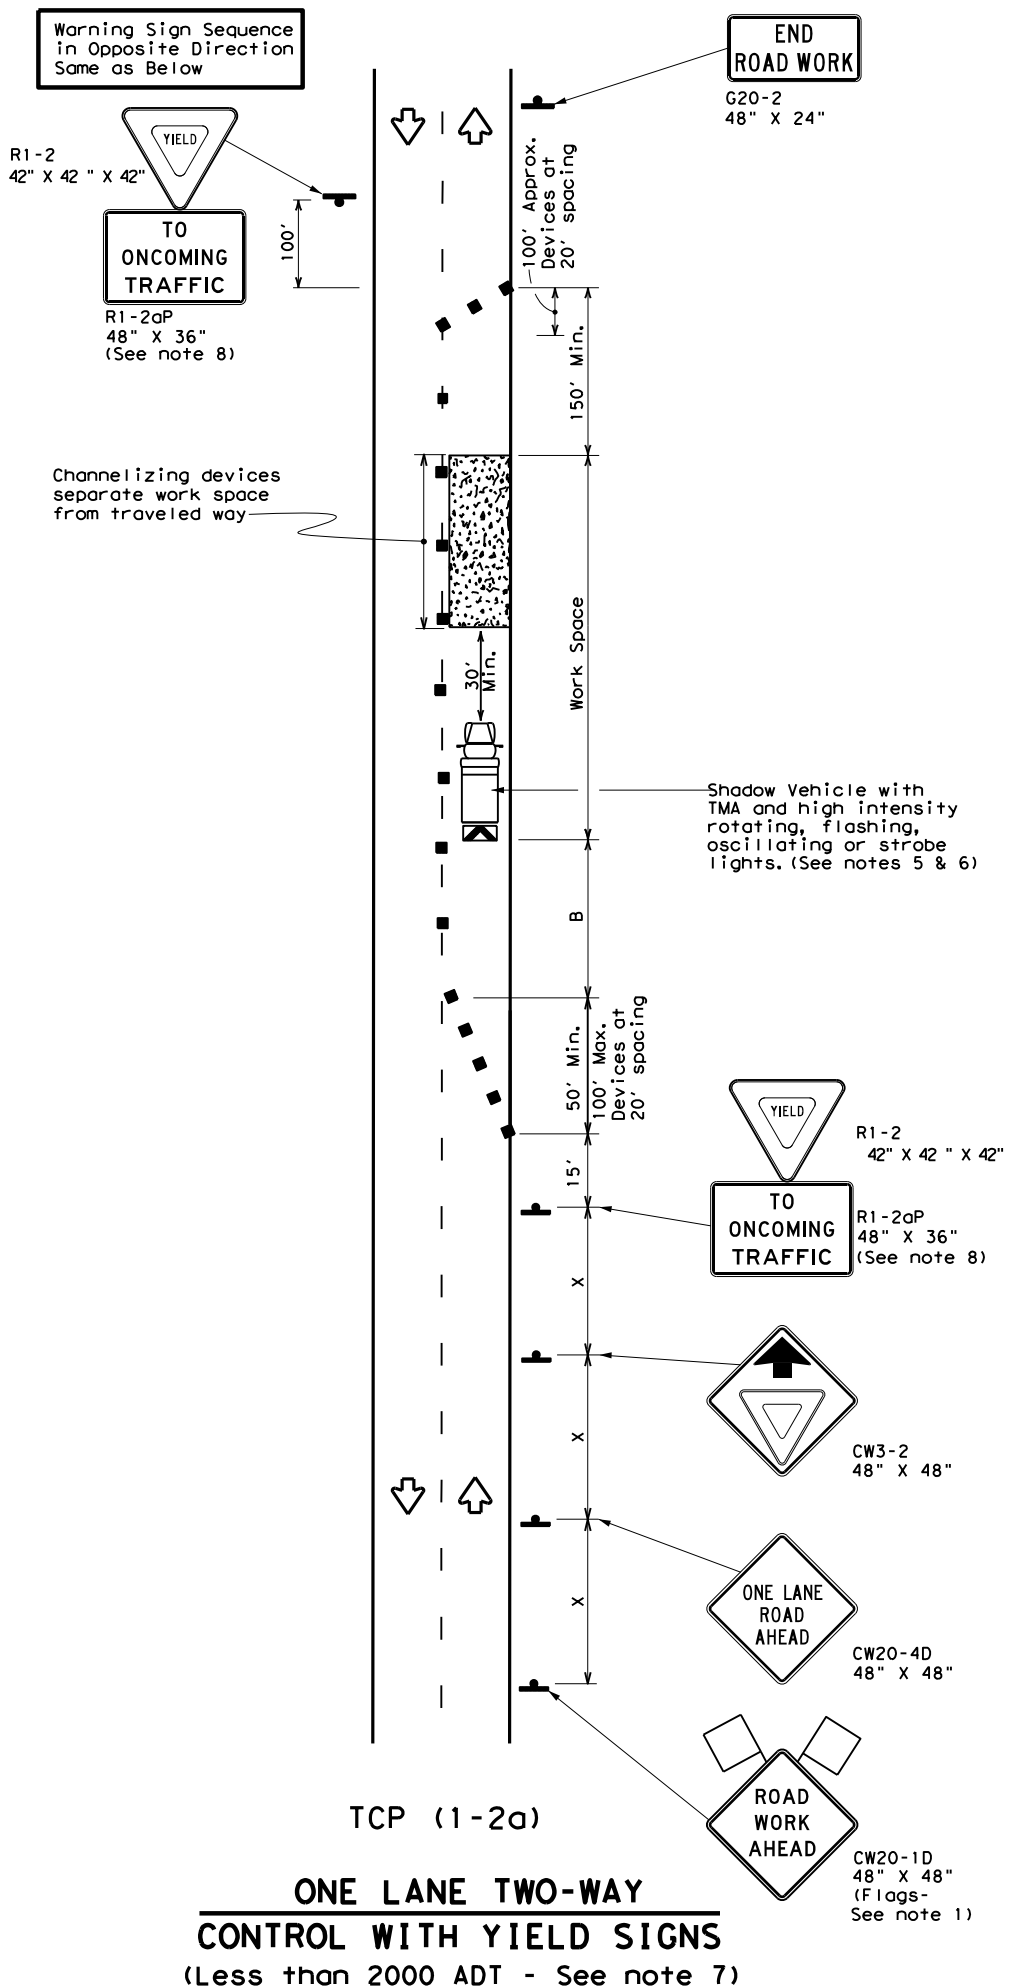

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * X	Formula L = WS ² / 60	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30		150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		




GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4D "ONE LANE ROAD AHEAD" sign, but proper sign spacing shall be maintained.
 - Sign spacing may be increased or an additional CW20-1D "ROAD WORK AHEAD" sign may be used if advance warning ahead of the flagger or R1-2 "YIELD" sign is less than 150 feet.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- TCP (1-2a)**
- R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work spaces should be no longer than one half city block. In rural areas on roadways with less than 2000 ADT, work spaces should be no longer than 400 feet.
 - R1-2 "YIELD" sign with R1-2aP "TO ONCOMING TRAFFIC" plaque shall be placed on a support at a 7 foot minimum mounting height.
- TCP (1-2b)**
- Flaggers should use two-way radios or other methods of communication to control traffic.
 - Length of work space should be based on the ability of flaggers to communicate.
 - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
 - Channelizing devices on the center-line may be omitted when a pilot car is leading traffic and approved by the Engineer.
 - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

TRAFFIC CONTROL PLAN ONE-LANE TWO-WAY TRAFFIC CONTROL			
TCP (1-2) - 18			
FILE: tcp1-2-18.dgn	DN:	CK:	DW:
© TxDOT December 1985	CON: 0901	SECT: 19	JOB: 176
REVISIONS	2-94 2-12	DIST: PAR	COUNTY: GRAYSON
4-90 4-98	1-97 2-18	SHEET NO.:	26

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any project. The user of this standard is responsible for its use.

DATE: 11/2/2022 4:21:05 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\01111111\01111111.dgn

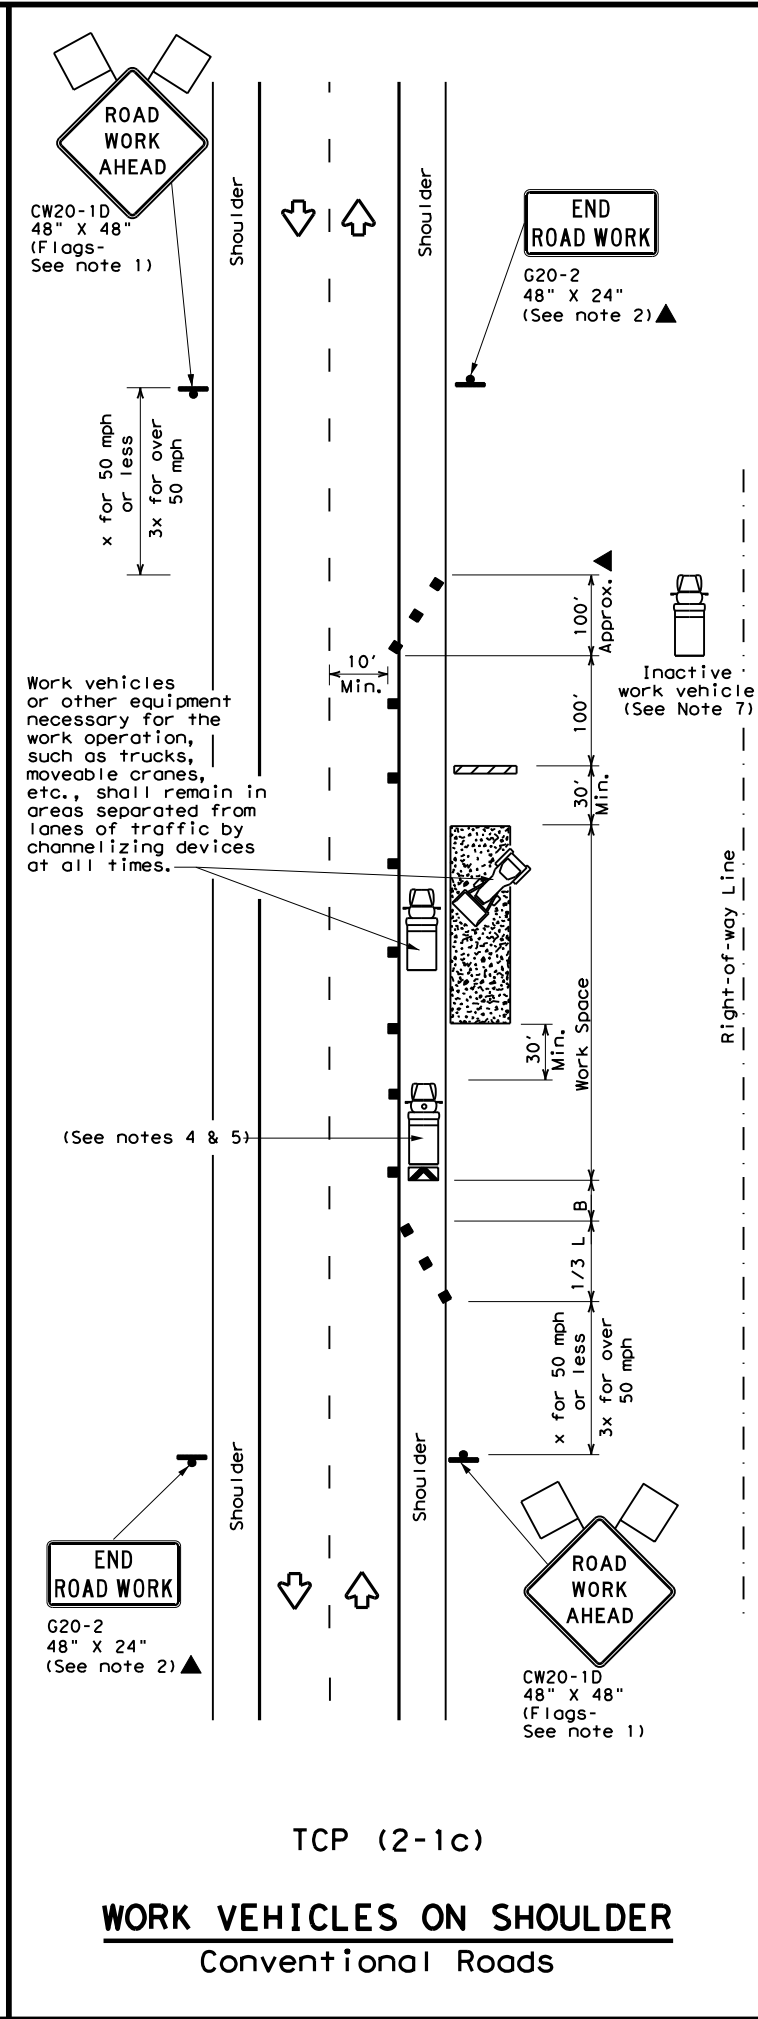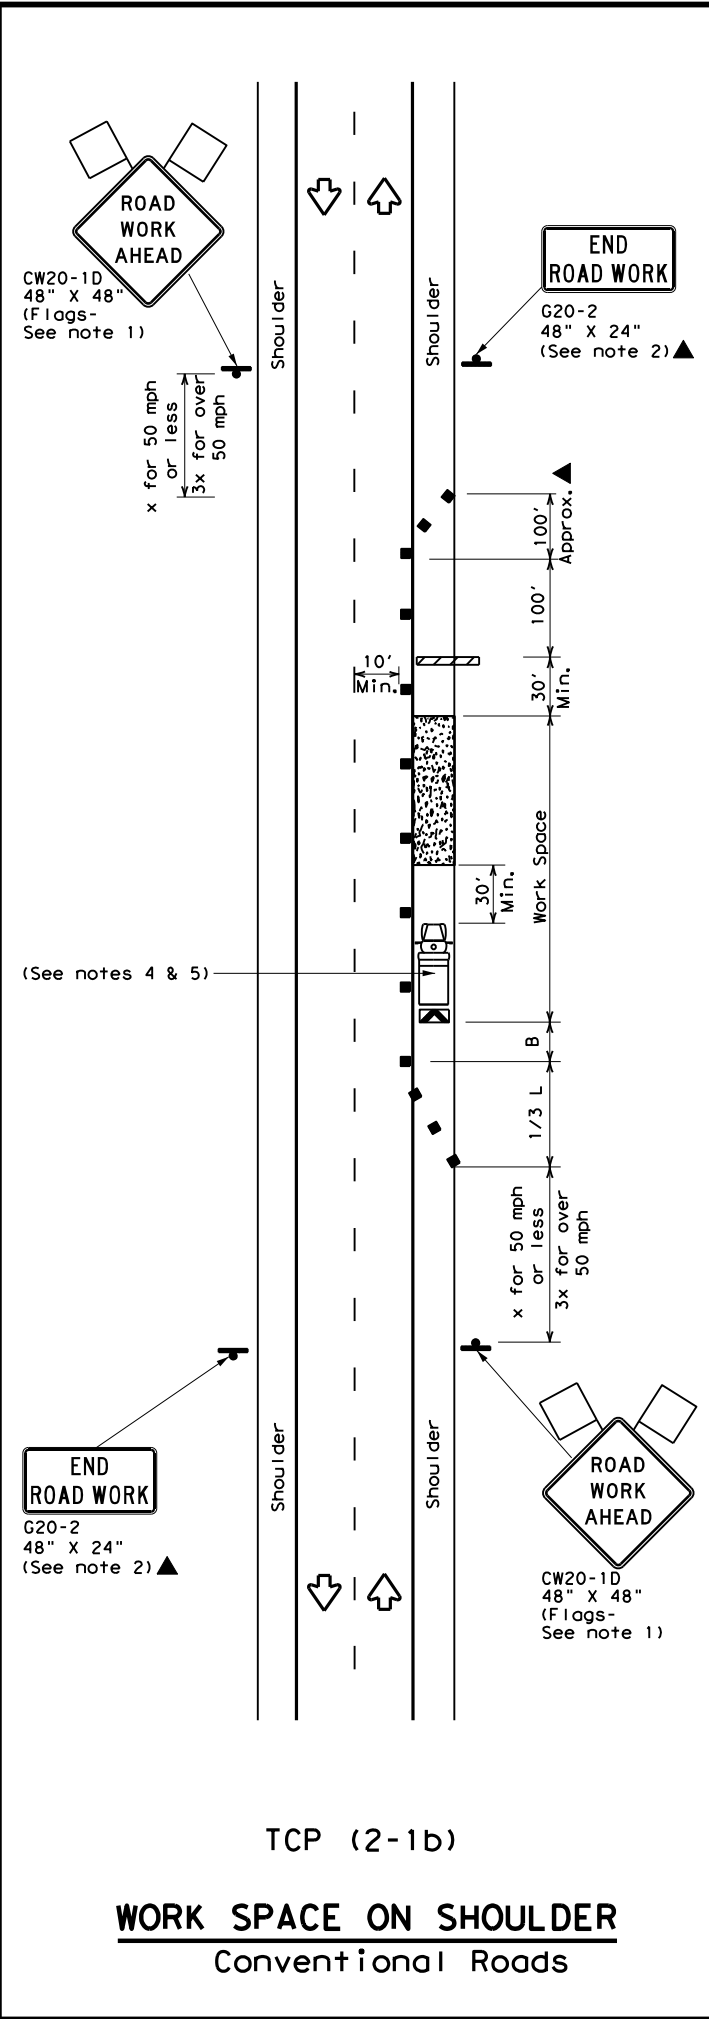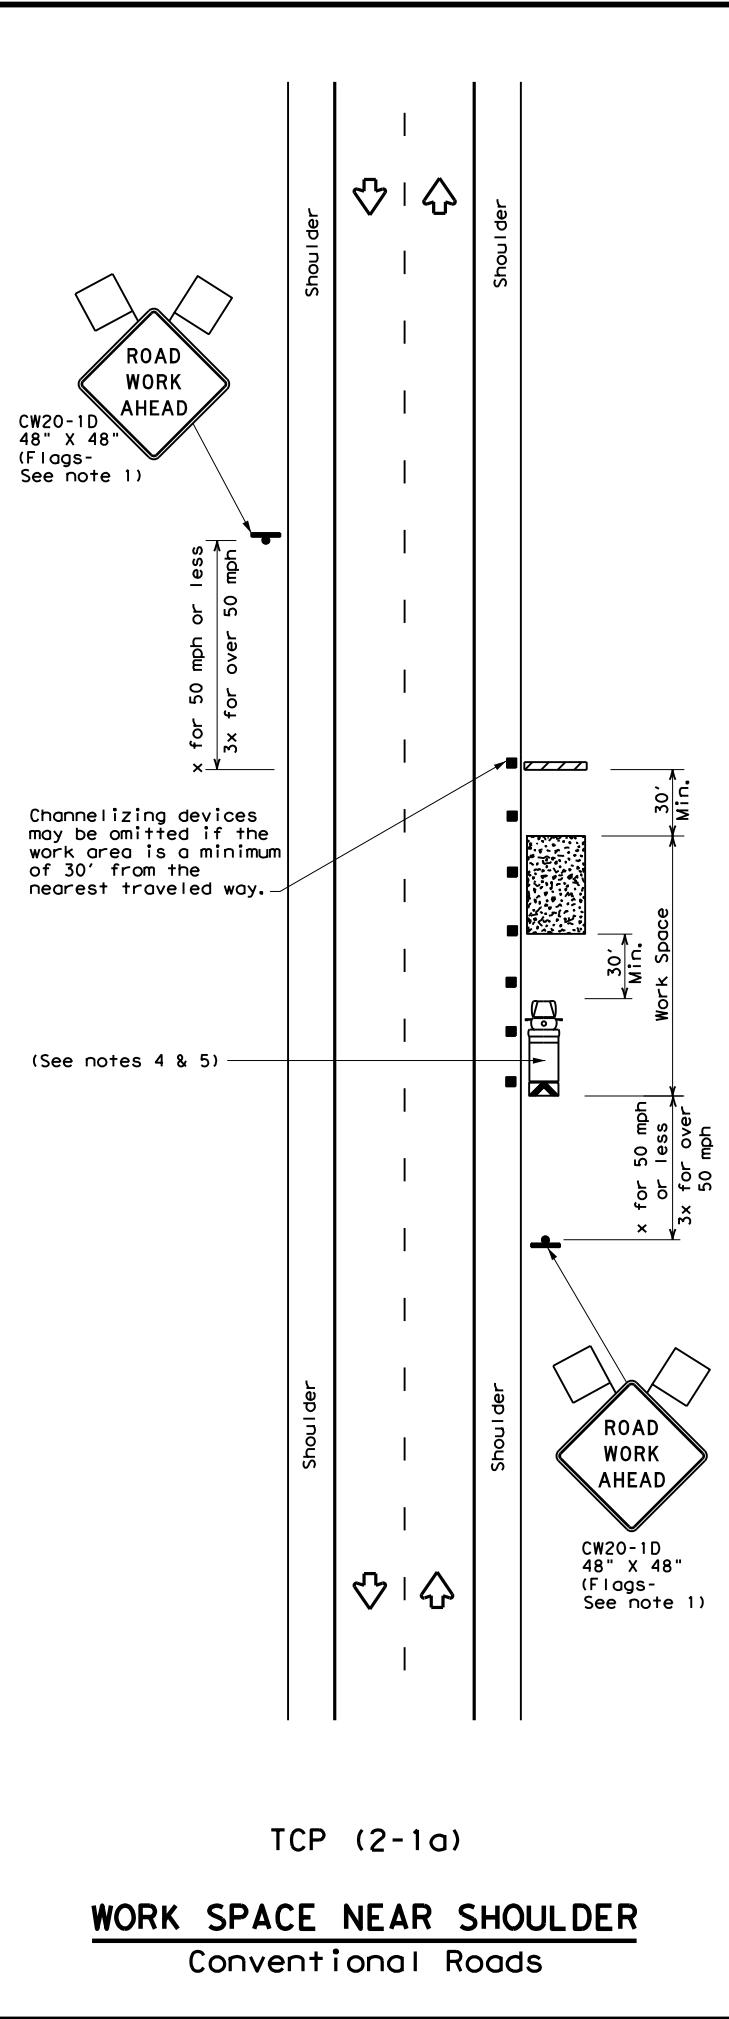

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the plans, or for routine maintenance work, when approved by the Engineer.
 - Stockpiled material should be placed a minimum of 30 feet from nearest traveled way.
 - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - Additional work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.

Texas Department of Transportation
 Traffic Operations Division Standard


TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK

TCP (2-1) - 18


FILE: tcp2-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	PAR	GRAYSON	27	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any project. The user of this standard is responsible for its use.

DATE: 11/2/2022 4:21:05 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-01-2022\09-01-2022.dgn

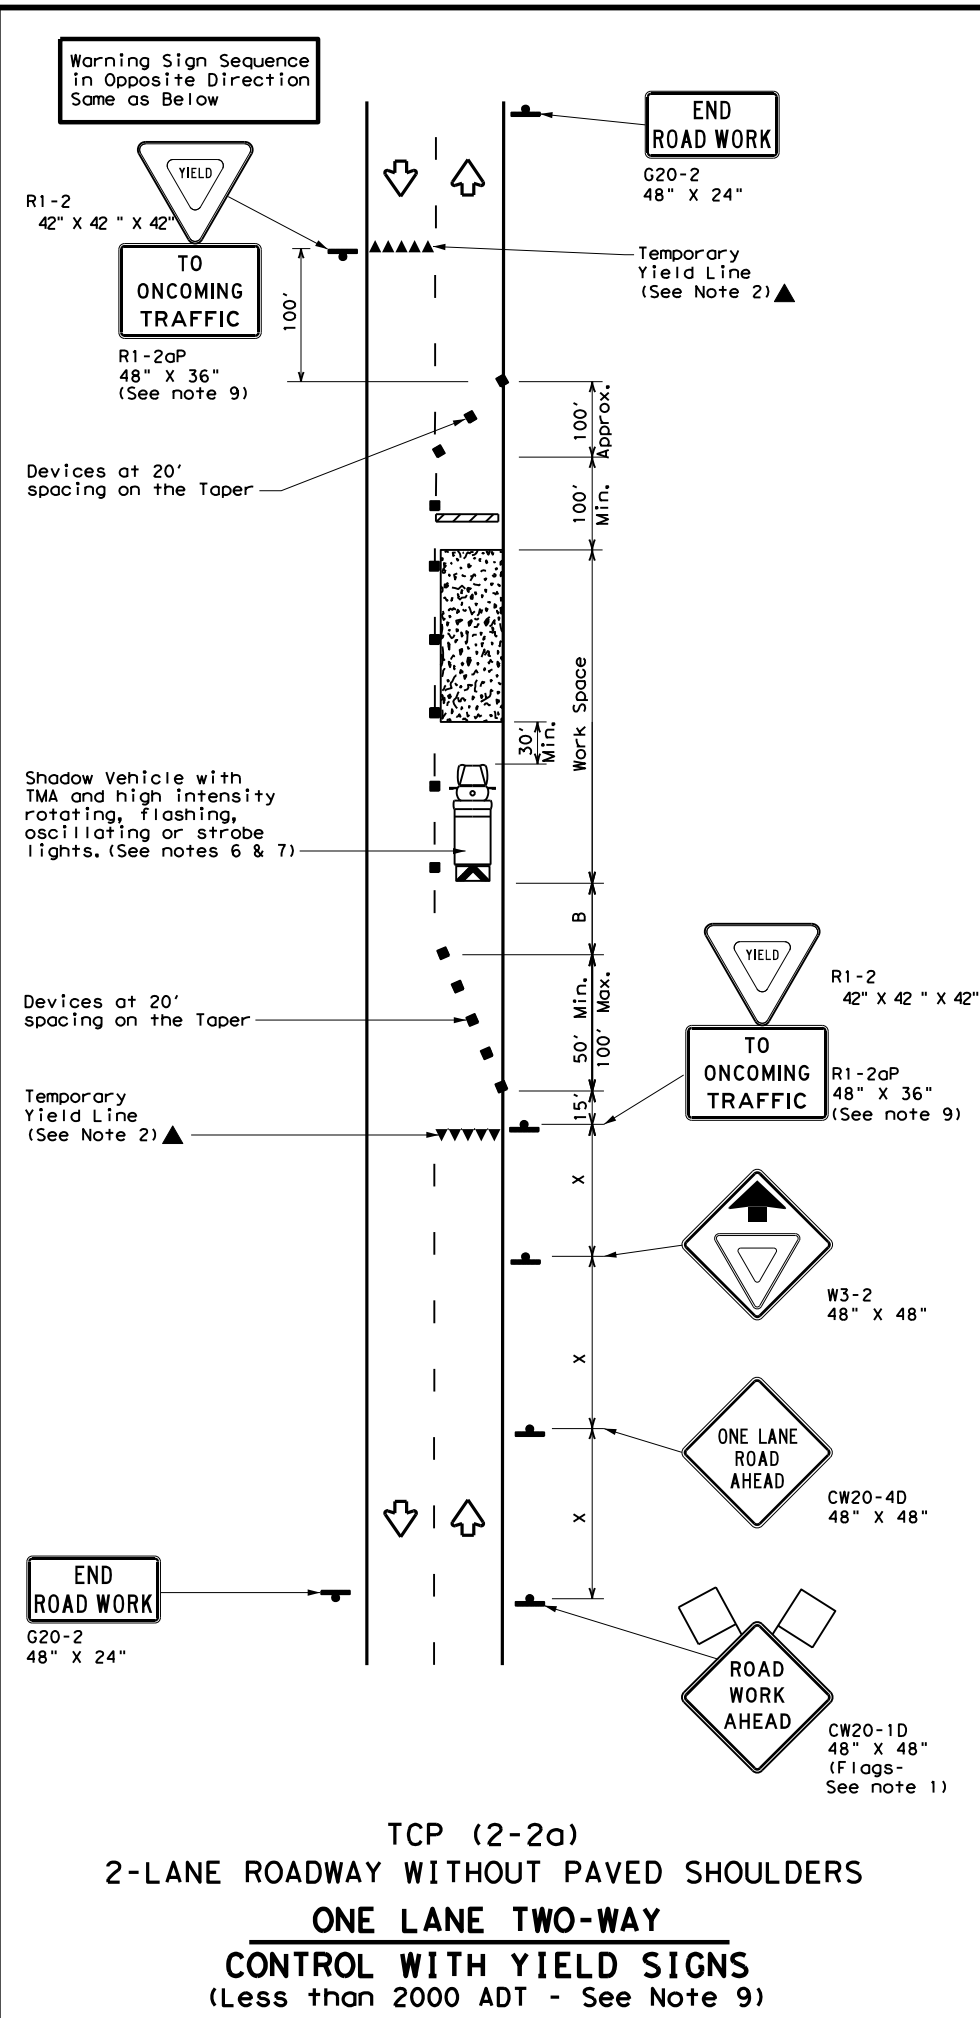

TCP (2-2a)
 2-LANE ROADWAY WITHOUT PAVED SHOULDERS
 ONE LANE TWO-WAY
 CONTROL WITH YIELD SIGNS
 (Less than 2000 ADT - See Note 9)

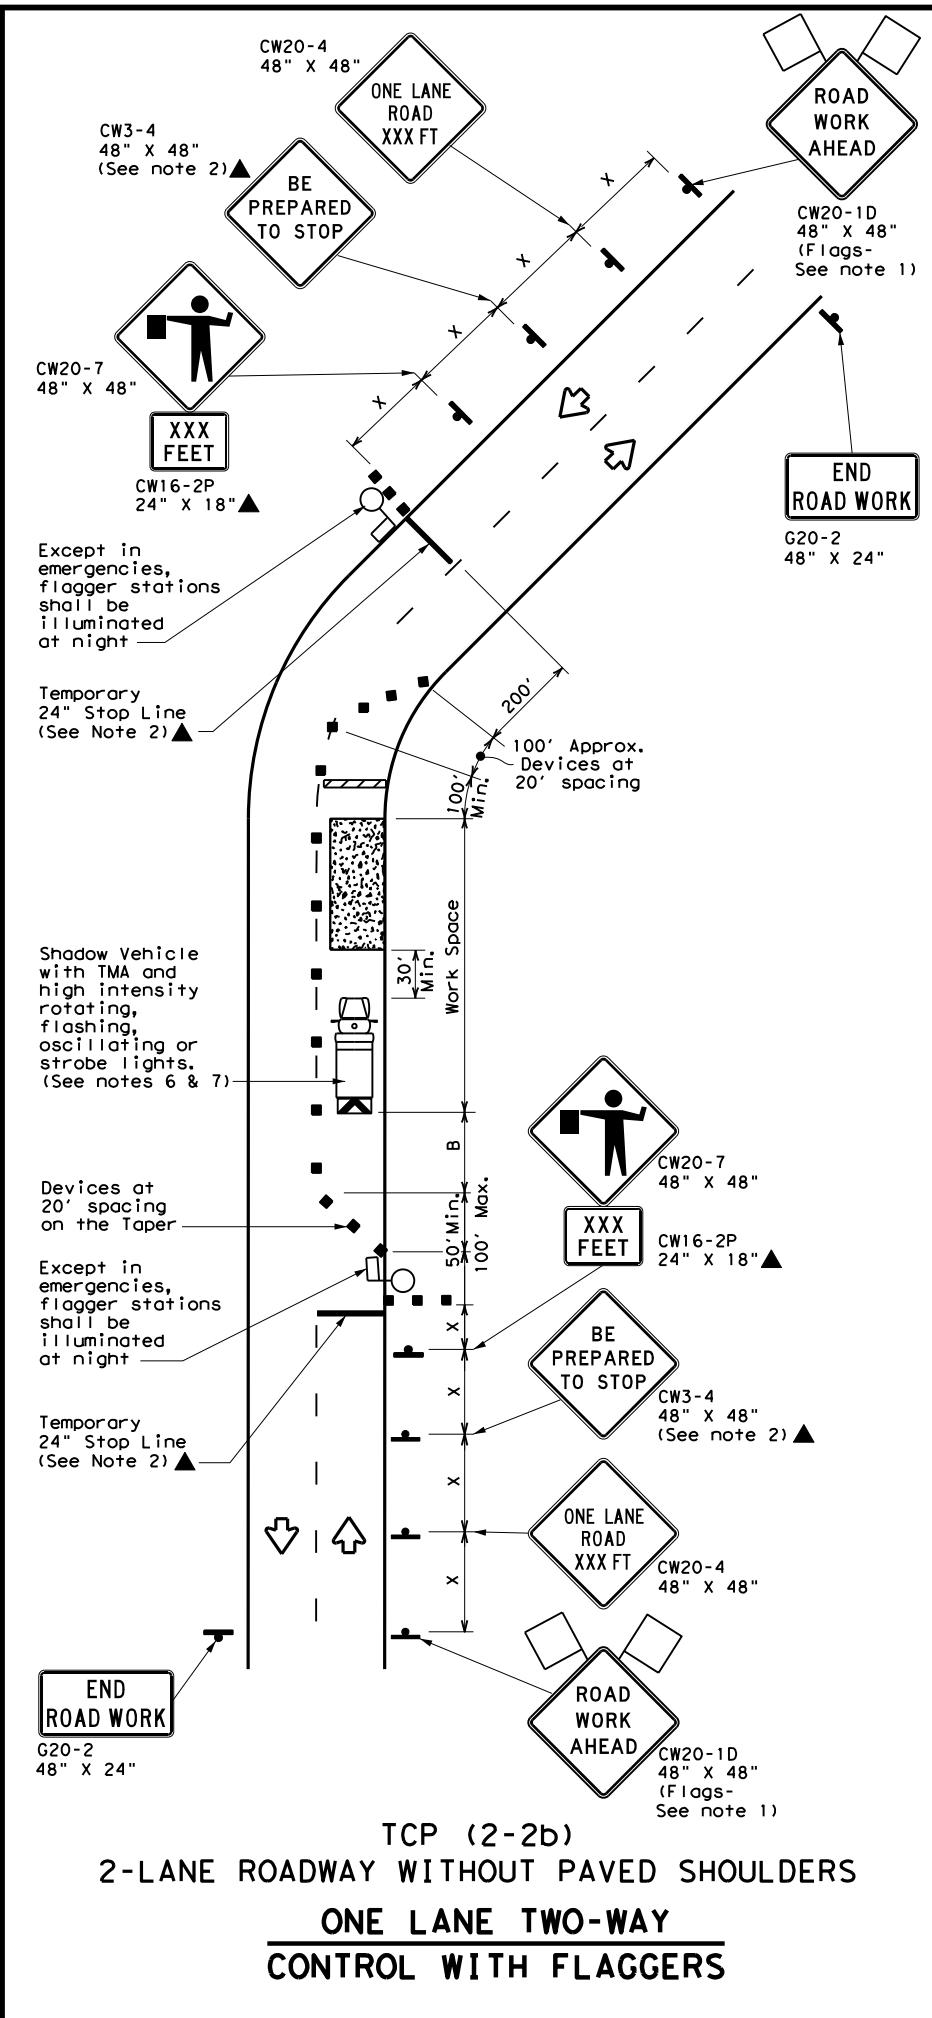

TCP (2-2b)
 2-LANE ROADWAY WITHOUT PAVED SHOULDERS
 ONE LANE TWO-WAY
 CONTROL WITH FLAGGERS

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)


TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES


- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4 "ONE LANE ROAD XXX FT" sign, but proper sign spacing shall be maintained.
 - Flaggers should use two-way radios or other methods of communication to control traffic.
 - Length of work space should be based on the ability of flaggers to communicate.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
- TCP (2-2a)**
- The R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work space should be no longer than one half city block. In rural areas, roadways with less than 2000 ADT, work space should be no longer than 400 feet.
 - The R1-2aP "YIELD TO ONCOMING TRAFFIC" sign shall be placed on a support at a 7 foot minimum mounting height.
- TCP (2-2b)**
- Channelizing devices on the center line may be omitted when a pilot car is leading traffic and approved by the Engineer.
 - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain stopping sight distance to the flagger and a queue of stopped vehicles. (See table above).
 - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

		Traffic Operations Division Standard	
TRAFFIC CONTROL PLAN ONE-LANE TWO-WAY TRAFFIC CONTROL			
TCP (2-2) - 18			
FILE:	tcp2-2-18.dgn	DN:	CK:
© TxDOT	REVISIONS	CON:	SECT:
8-95	3-03	0901	19
1-97	2-12	DIST:	COUNTY:
4-98	2-18	PAR	GRAYSON
		JOB:	176
		HIGHWAY:	VARIOUS
		SHEET NO.:	28

DATE: 11/2/2022 4:21:06 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-13-2022\09-13-2022.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for any errors or omissions that may appear hereon.

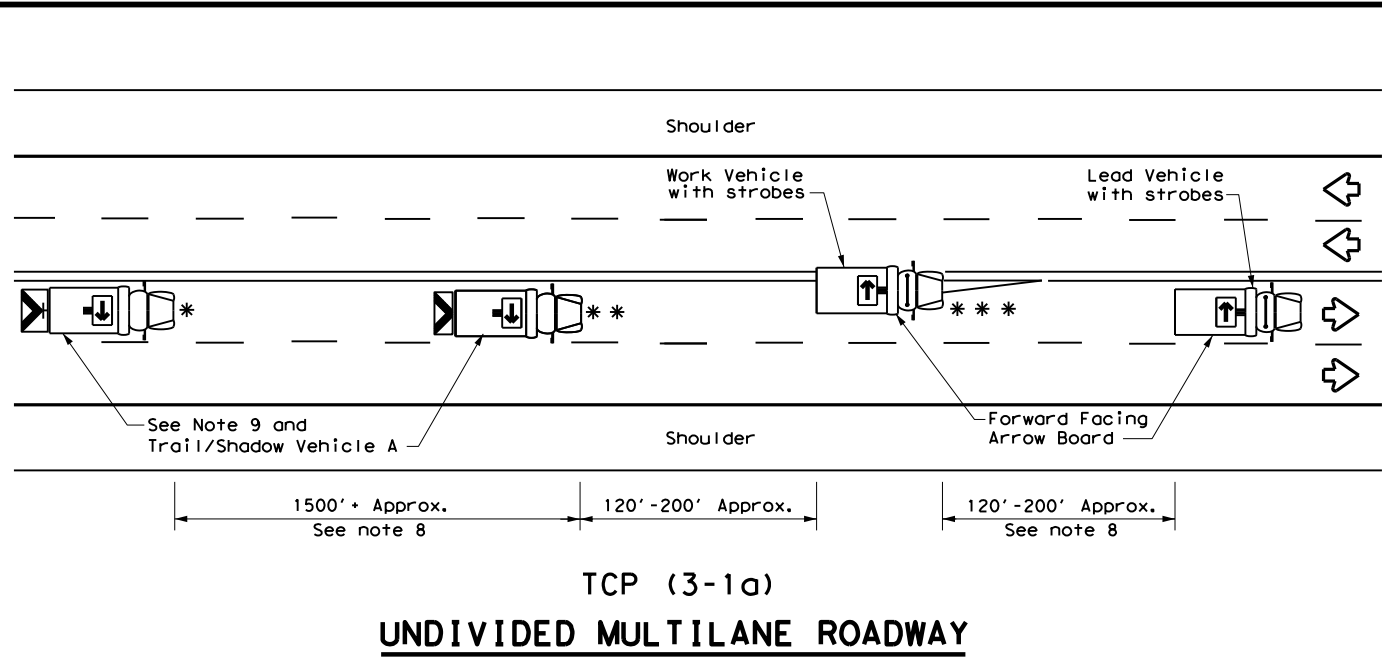

TCP (3-1a)
UNDIVIDED MULTILANE ROADWAY

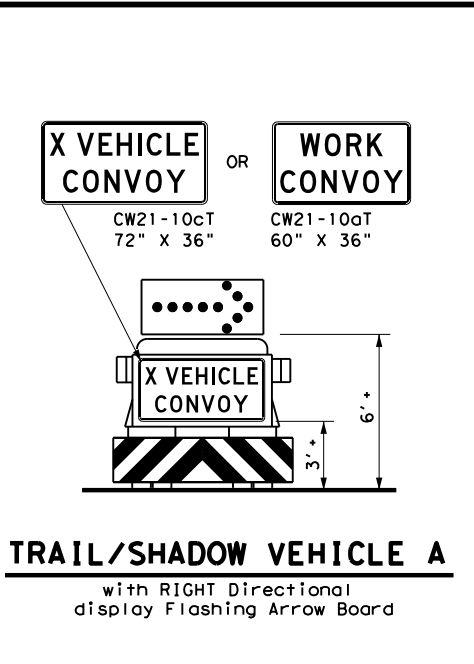


TRAIL/SHADOW VEHICLE A
with RIGHT Directional display Flashing Arrow Board

LEGEND			
*	Trail Vehicle	ARROW BOARD DISPLAY	
**	Shadow Vehicle		
***	Work Vehicle		RIGHT Directional
	Heavy Work Vehicle		LEFT Directional
	Truck Mounted Attenuator (TMA)		Double Arrow
	Traffic Flow		CAUTION (Alternating Diamond or 4 Corner Flash)


TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GENERAL NOTES


- TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used the WORK vehicle must be equipped with an arrow board. The Engineer will determine if the LEAD VEHICLE and/or TRAIL VEHICLE are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
- The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE and TRAIL VEHICLE are required.
- Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
- Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
- Each vehicle shall have two-way radio communication capability.
- When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
- Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
- "X VEHICLE CONVOY" (CW21-10cT) or "WORK CONVOY" (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" X 48" diamond shaped "WORK CONVOY" (CW21-10T) or "X VEHICLE CONVOY" (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The "X VEHICLE CONVOY" sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
- On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a "DO NOT PASS" (R4-1) sign should be placed on the back of the rearmost protection vehicle.

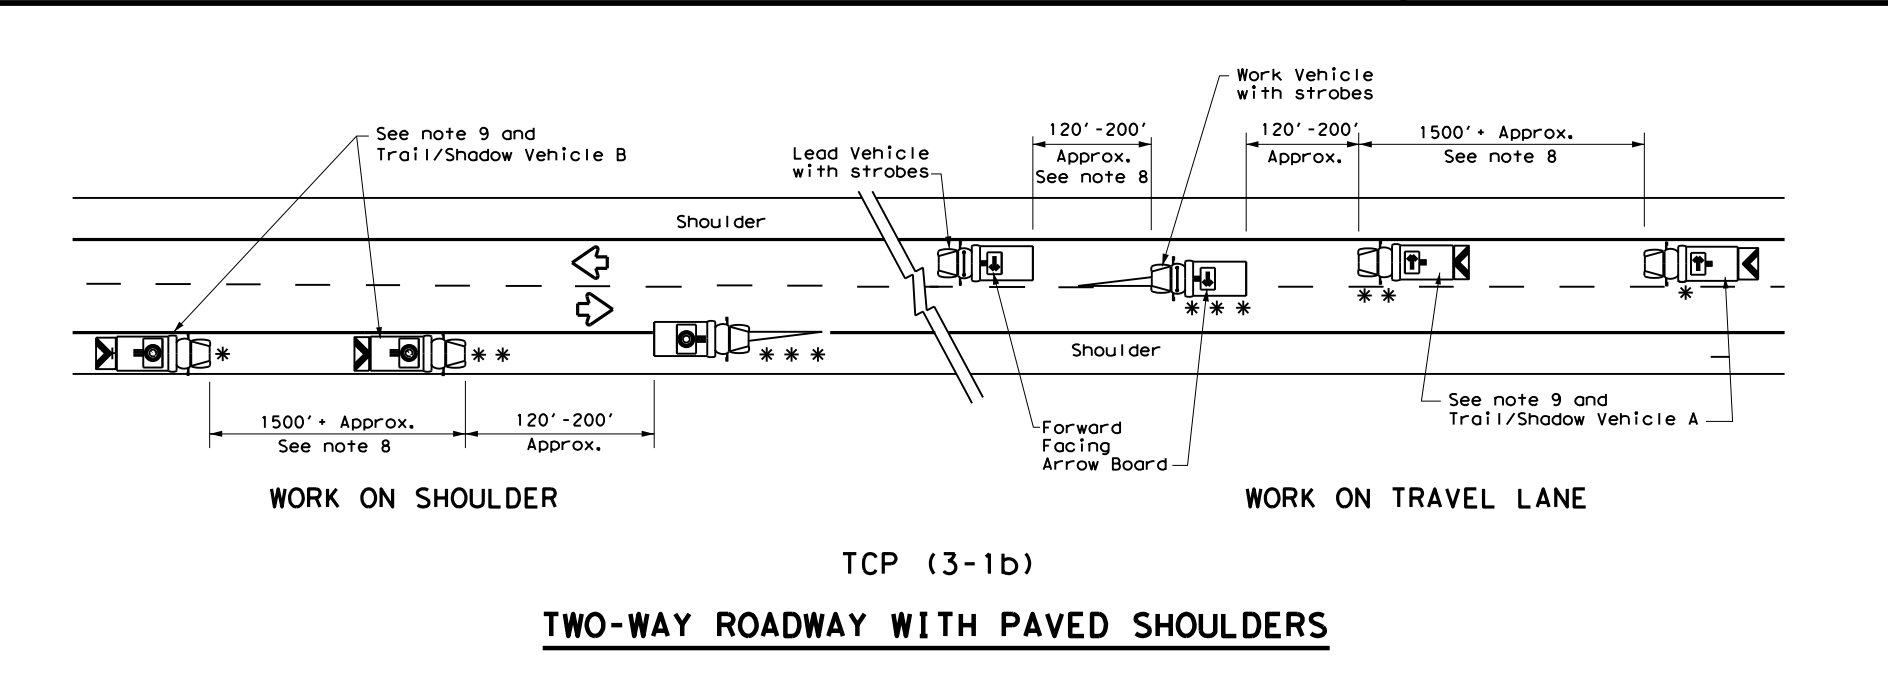


TCP (3-1b)
TWO-WAY ROADWAY WITH PAVED SHOULDERS

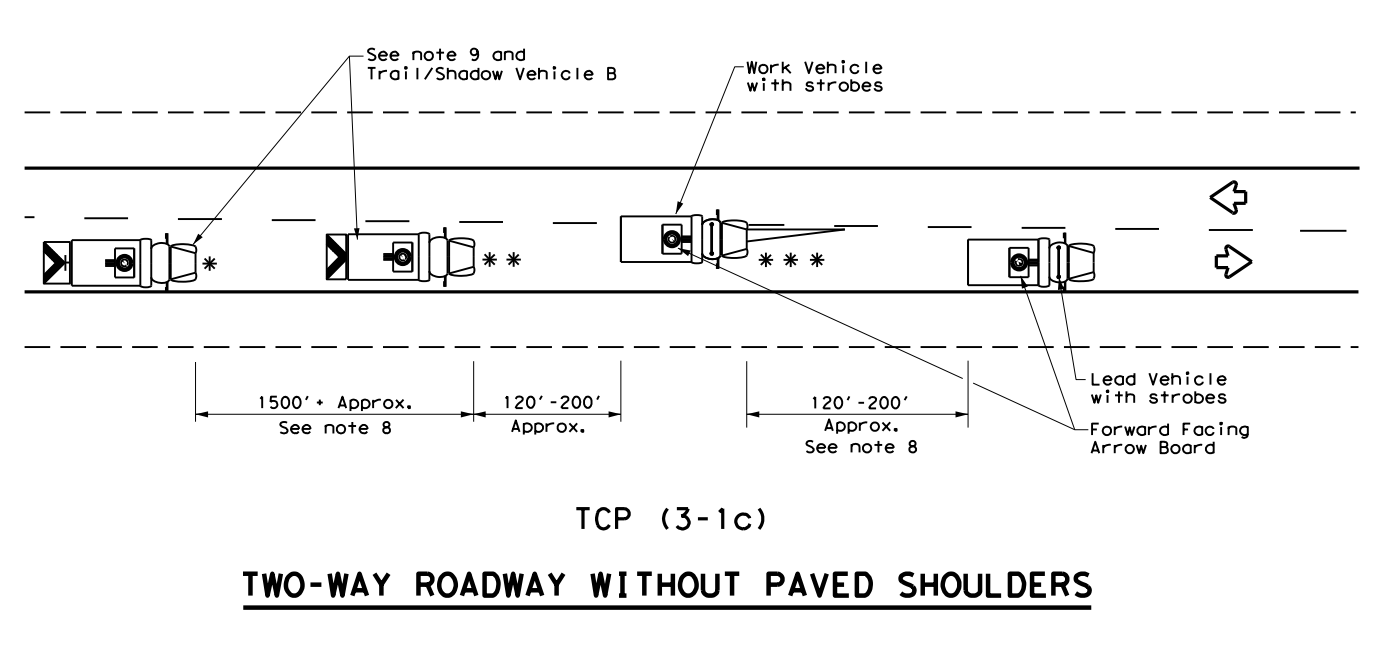

TCP (3-1c)
TWO-WAY ROADWAY WITHOUT PAVED SHOULDERS

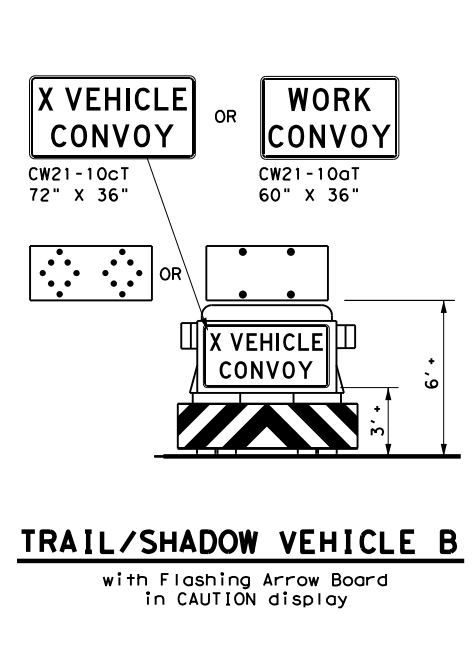

TRAIL/SHADOW VEHICLE B
with Flashing Arrow Board in CAUTION display

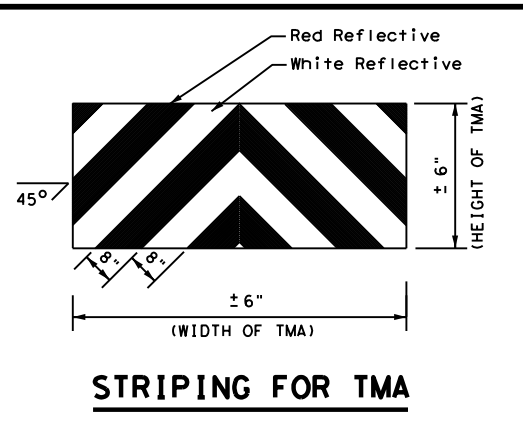

Traffic Operations Division Standard









TEXAS DEPARTMENT OF TRANSPORTATION

**TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
UNDIVIDED HIGHWAYS**

TCP(3-1)-13

FILE:	tcp3-1.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	December 1985	CONT:	SECT:	JOB:	HIGHWAY				
REVISIONS		0901	19	176	VARIOUS				
2-94	4-98	DIST:	COUNTY:	SHEET NO.					
8-95	7-13	PAR:	GRAYSON	29					
1-97									

DATE: 11/2/2022 4:21:06 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-11-2022\09-11-2022.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for any errors or omissions that may appear hereon.

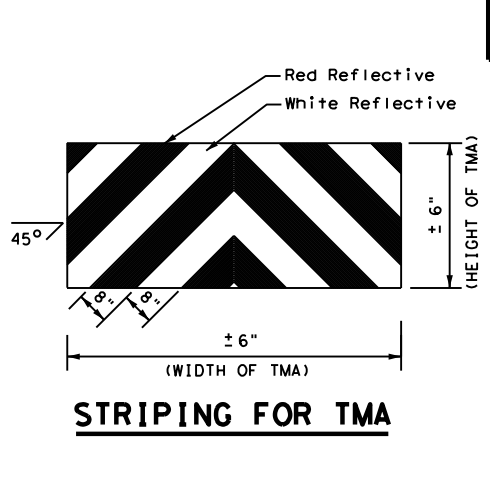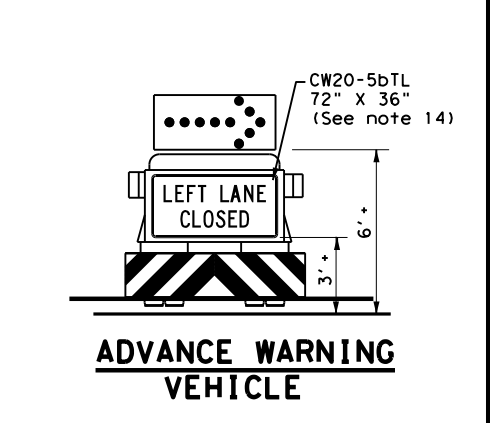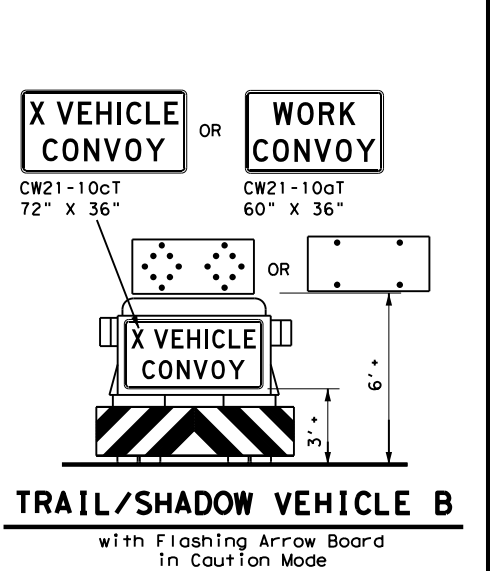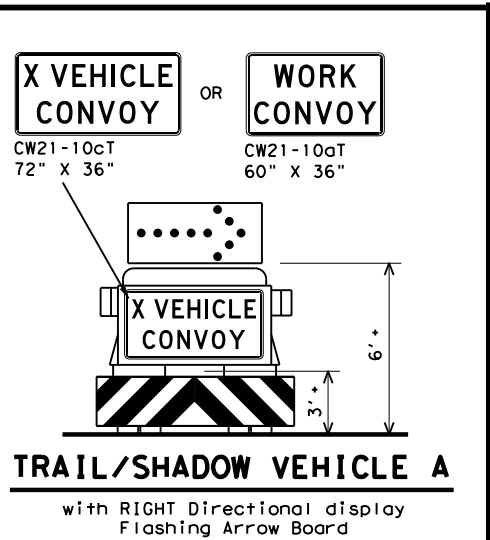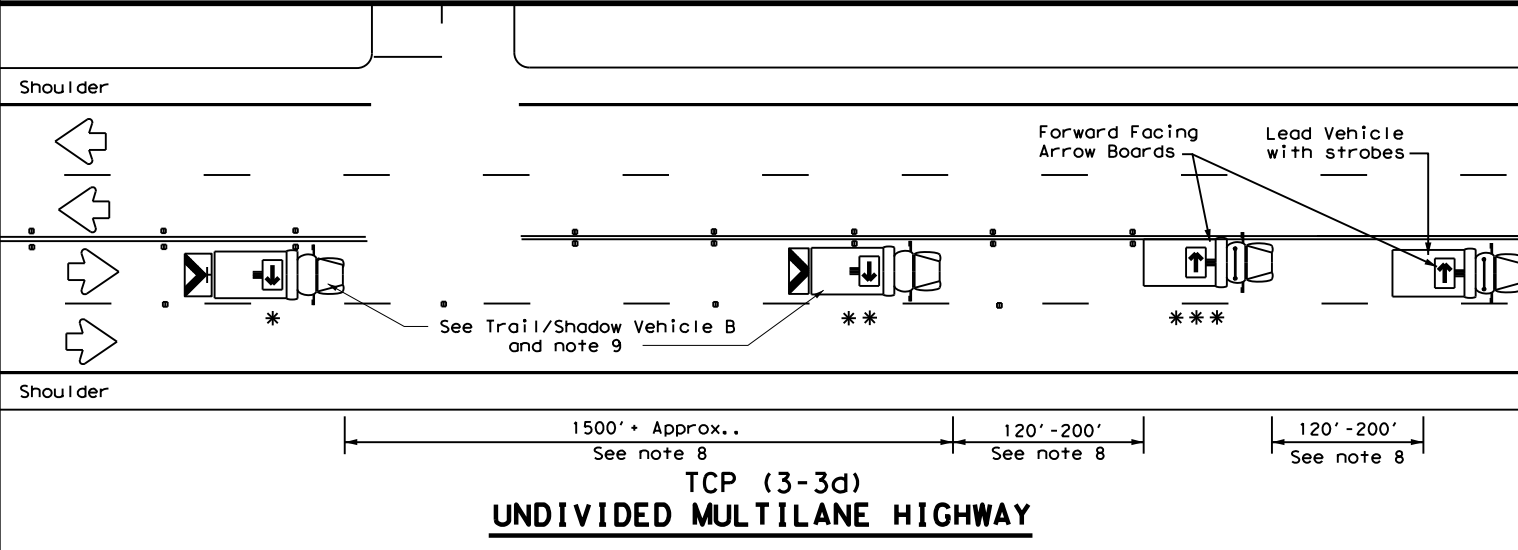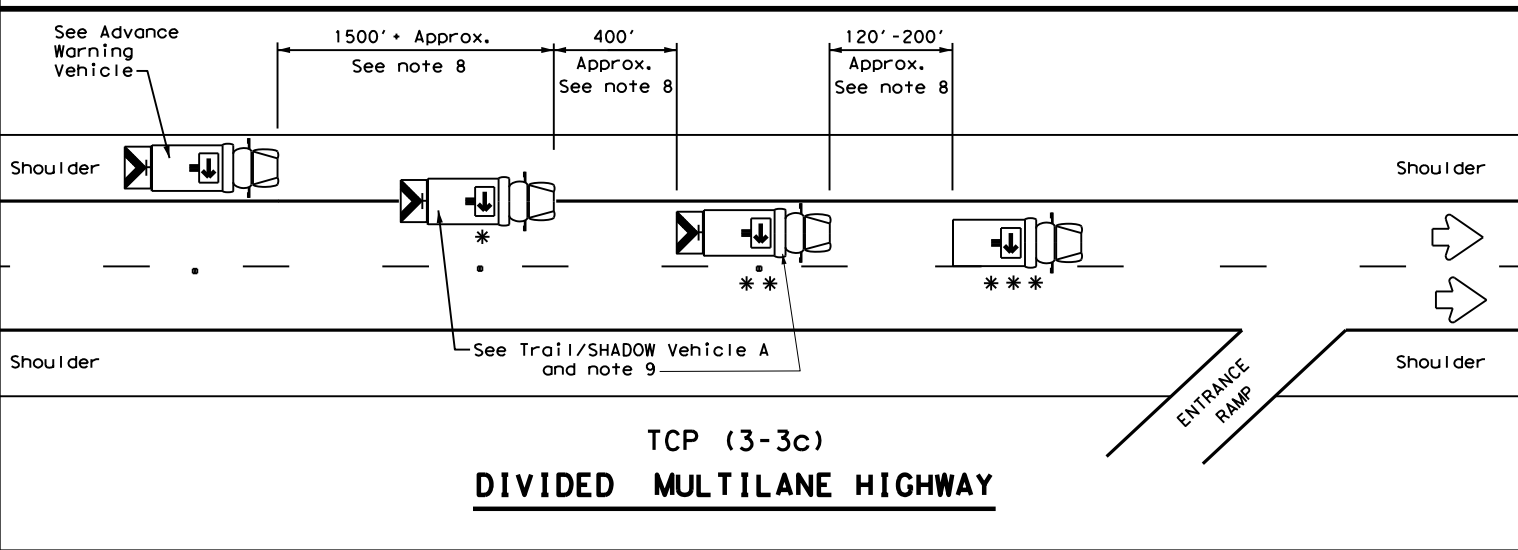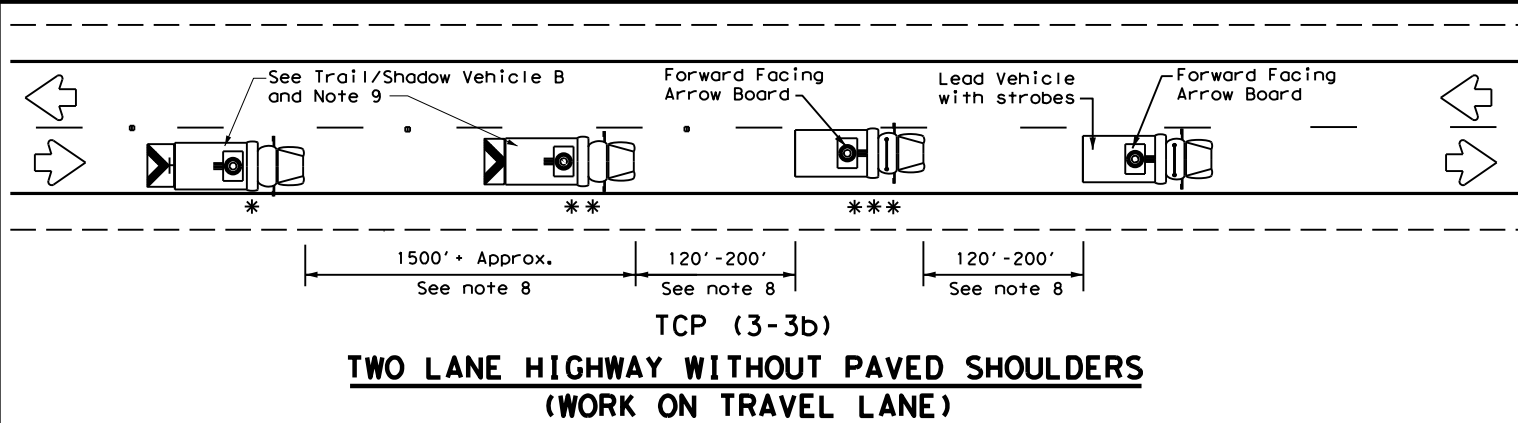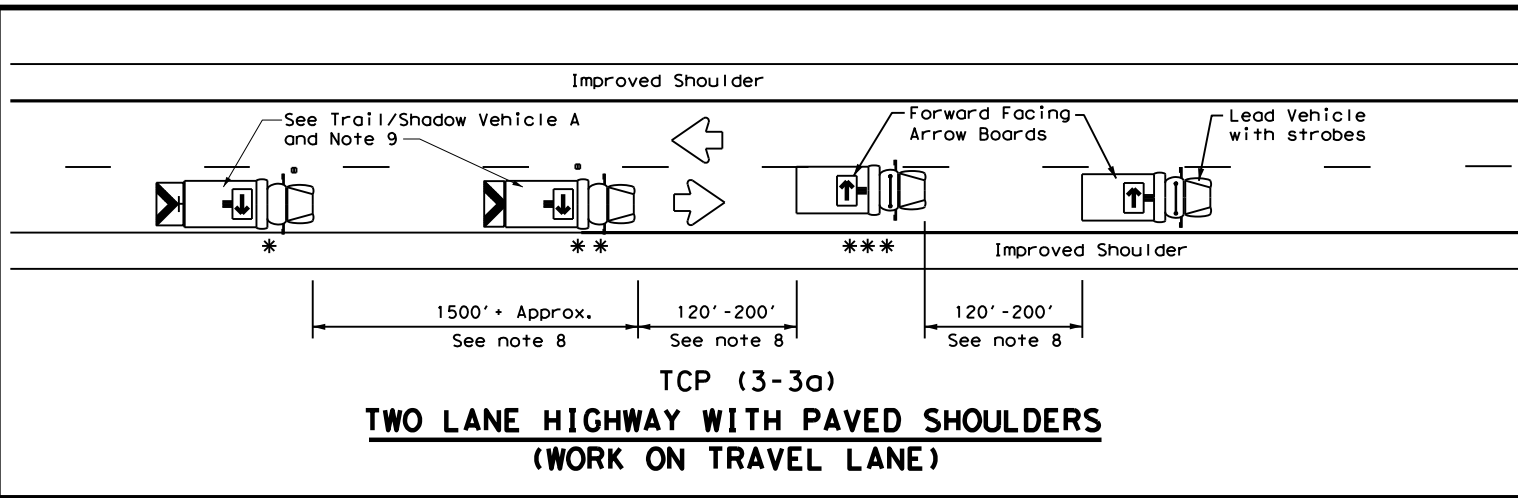

LEGEND		
* Trail Vehicle	ARROW BOARD DISPLAY	
** Shadow Vehicle		
*** Work Vehicle		RIGHT Directional
		LEFT Directional
		Double Arrow
		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
✓				

GENERAL NOTES

1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING and TRAIL VEHICLE are required.
4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
5. Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
6. Each vehicle shall have two-way radio communication capability.
7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
9. X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
10. For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
11. A double arrow shall not be displayed on the arrow board on the Advance Warning Vehicle.
12. For divided highways with three or four lanes in each direction, use TCP(3-2).
13. Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
14. The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes it necessary.
15. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.

Texas Department of Transportation
 Traffic Operations Division Standard


TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
RAISED PAVEMENT
MARKER INSTALLATION/REMOVAL
TCP (3-3) - 14

FILE: tcp3-3.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT	CK: TxDOT
© TxDOT September 1987	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 7-13	PAR	GRAYSON	30	
1-97 7-14				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any project. The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any project.

Warning sign and rumble strip sequence in opposite direction is same as below.

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

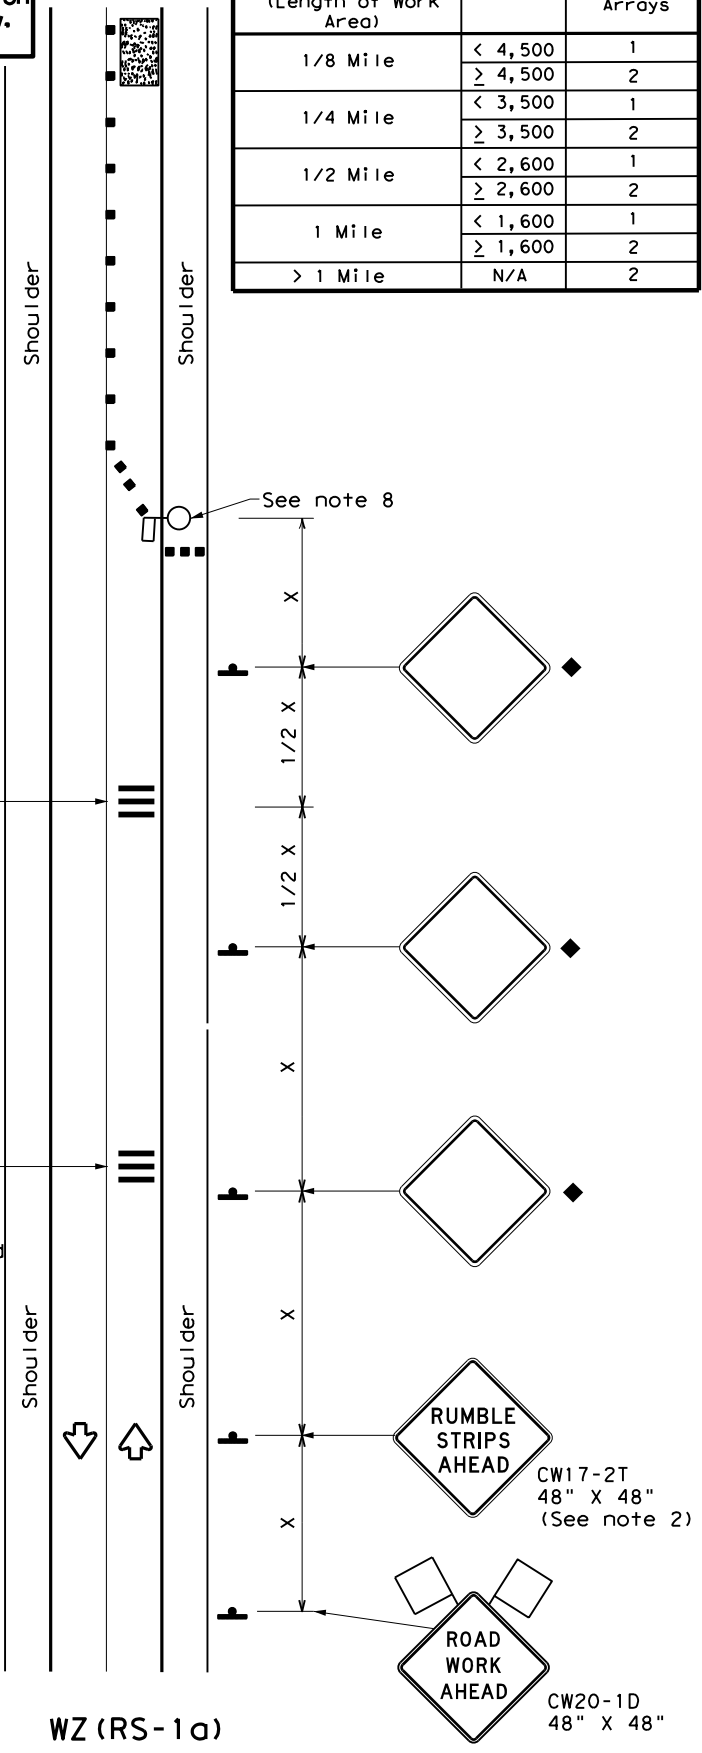

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

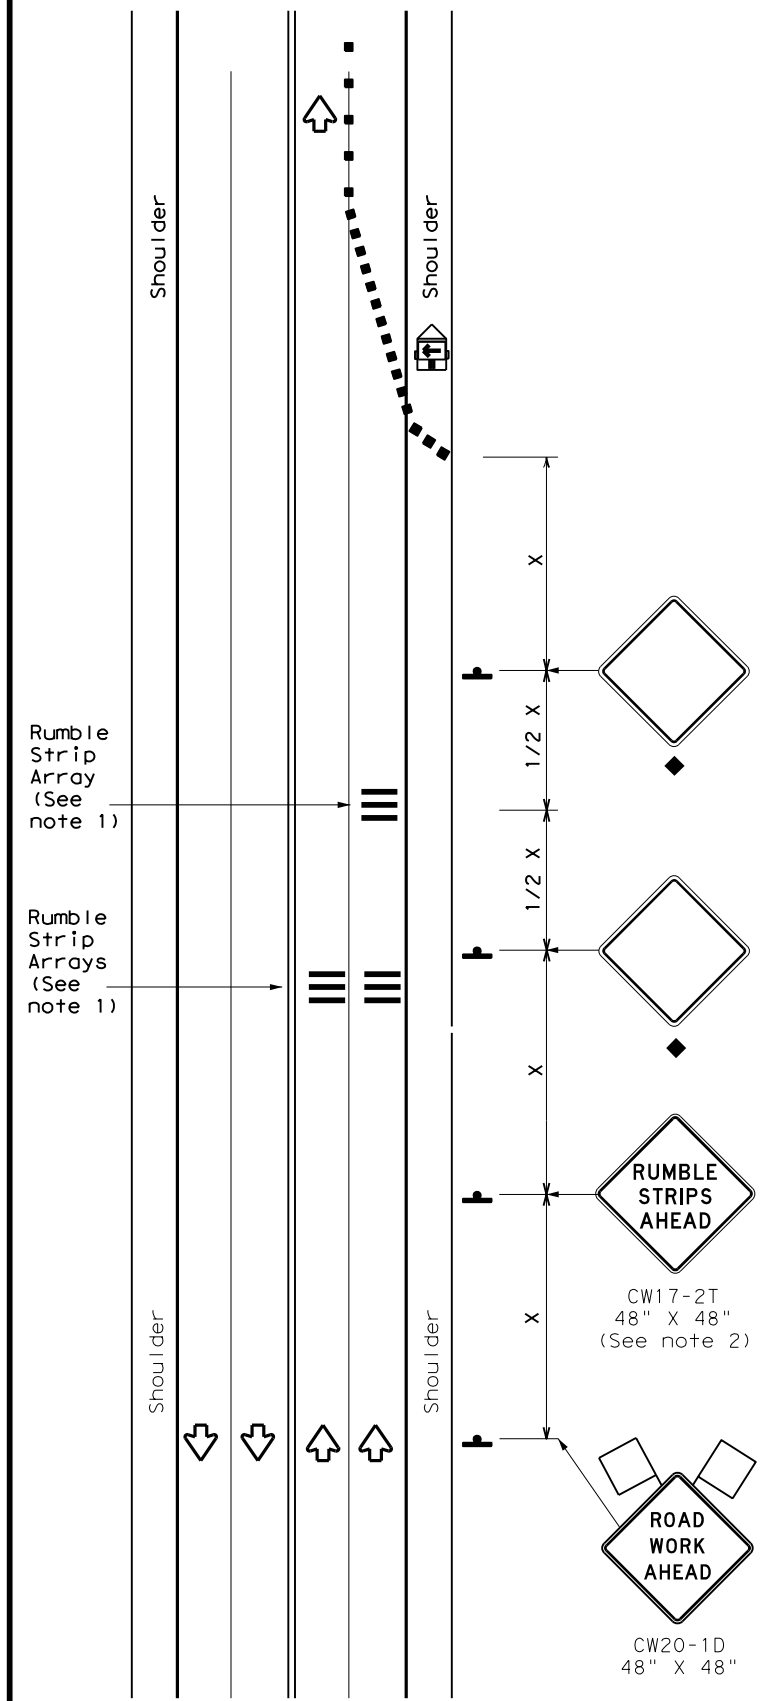

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35' +

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT)
 S=Posted Speed (MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.
 * For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

Texas Department of Transportation Traffic Safety Division Standard

TEMPORARY RUMBLE STRIPS


WZ (RS) - 22

FILE: wzrs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2012	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
2-14 1-22	DIST	COUNTY	SHEET NO.	
4-16	PAR	GRAYSON	31	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of the information contained herein for any purpose other than that for which it was originally intended.

DATE: 11/2/2022 4:21:07 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-01-22\09-01-22.dwg

WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS

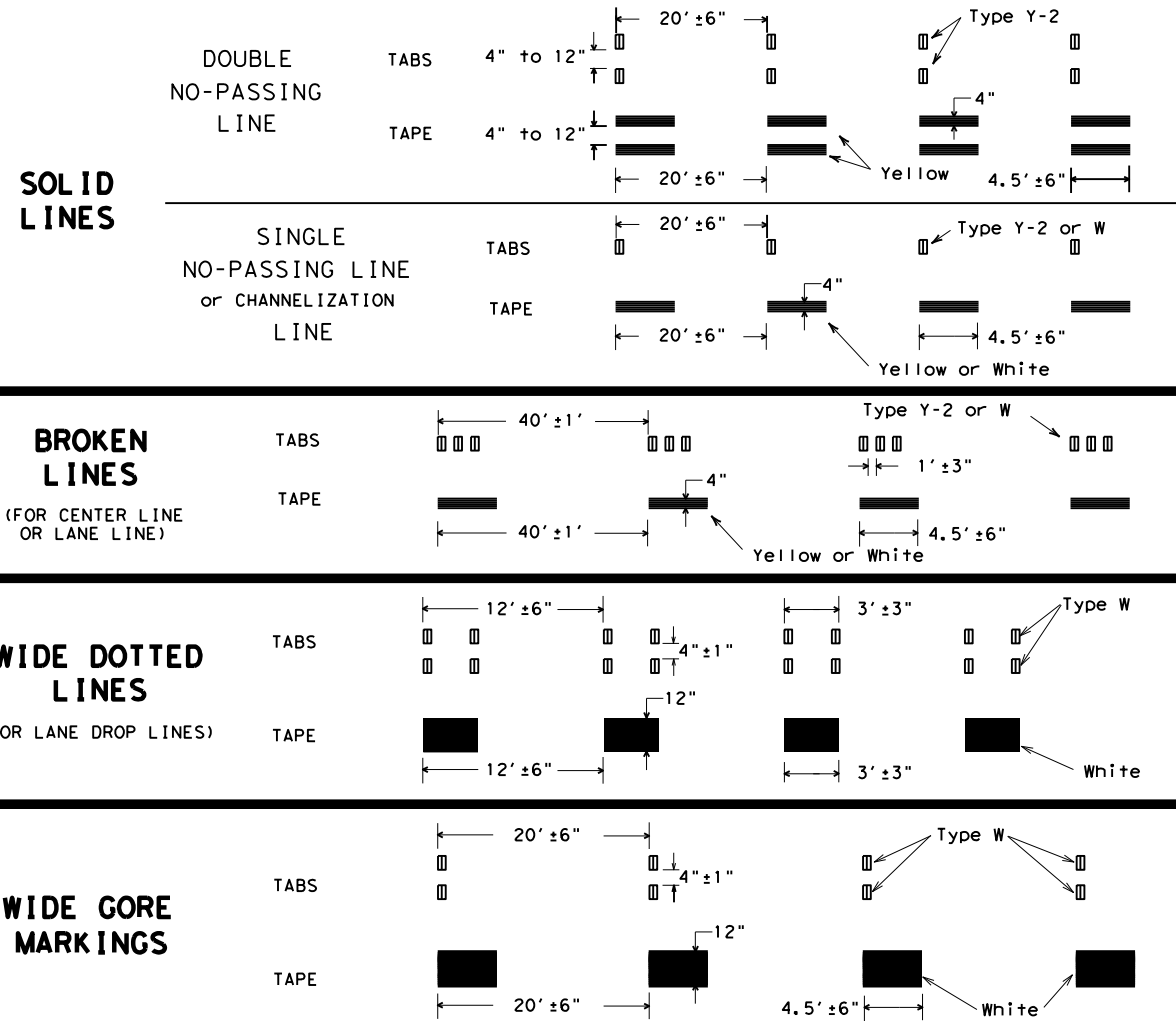



NOTES:

- Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexible-reflective roadway marker tabs unless otherwise specified elsewhere in plans.
- Short term pavement markings shall NOT be used to simulate edge lines.
- Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones for up to 14 calendar days. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.

TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)

- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

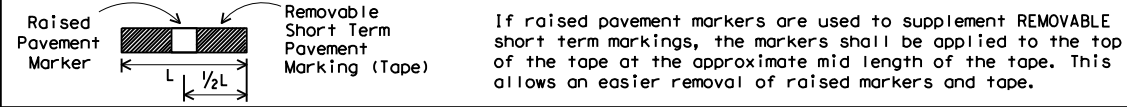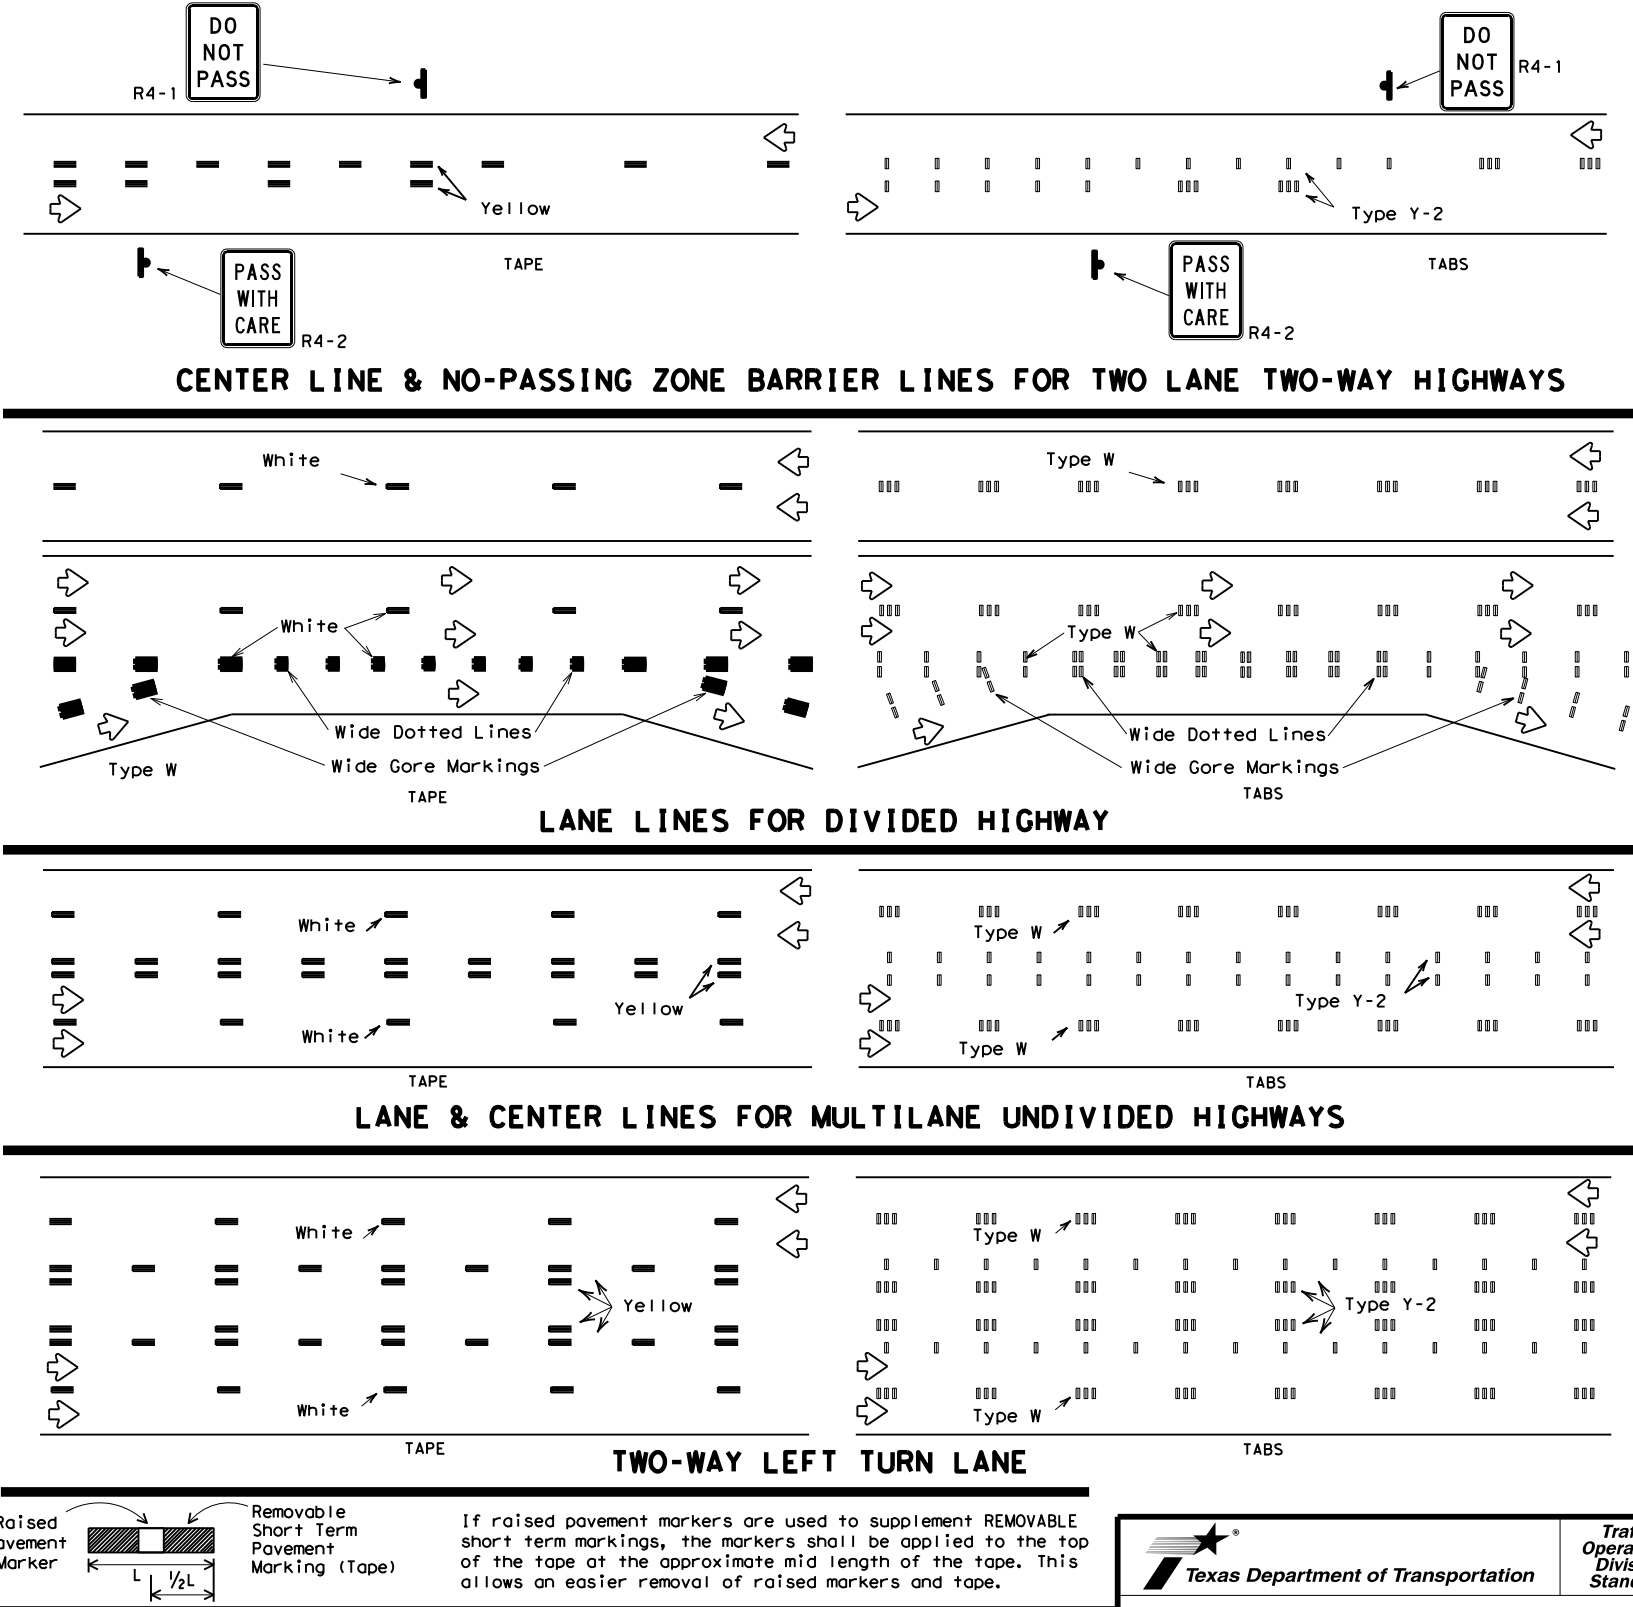

PREFABRICATED PAVEMENT MARKINGS

- Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.
- Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240 "Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Construction-Grade Prefabricated Pavement Markings."

RAISED PAVEMENT MARKERS

- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

- DMSs referenced above can be found along with embedded links to their respective MPLs at the following website:
http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm




WORK ZONE SHORT TERM PAVEMENT MARKINGS

WZ (STPM) - 13

FILE:	wzstpm-13.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	April 1992	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0901	19	176	VARIOUS				
1-97		DIST	COUNTY	SHEET NO.					
3-03		PAR	GRAYSON	32					
7-13									


CK: DW: CK: DW:

DATE: 10/17/2023 8:46:43 AM
 FILE: C:\066\GIS\MANAGER\DeskTop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ_0901-19-176_etc\Submit\195%_Plans\DGNS\034 PLAN LAYOUTS.dgn

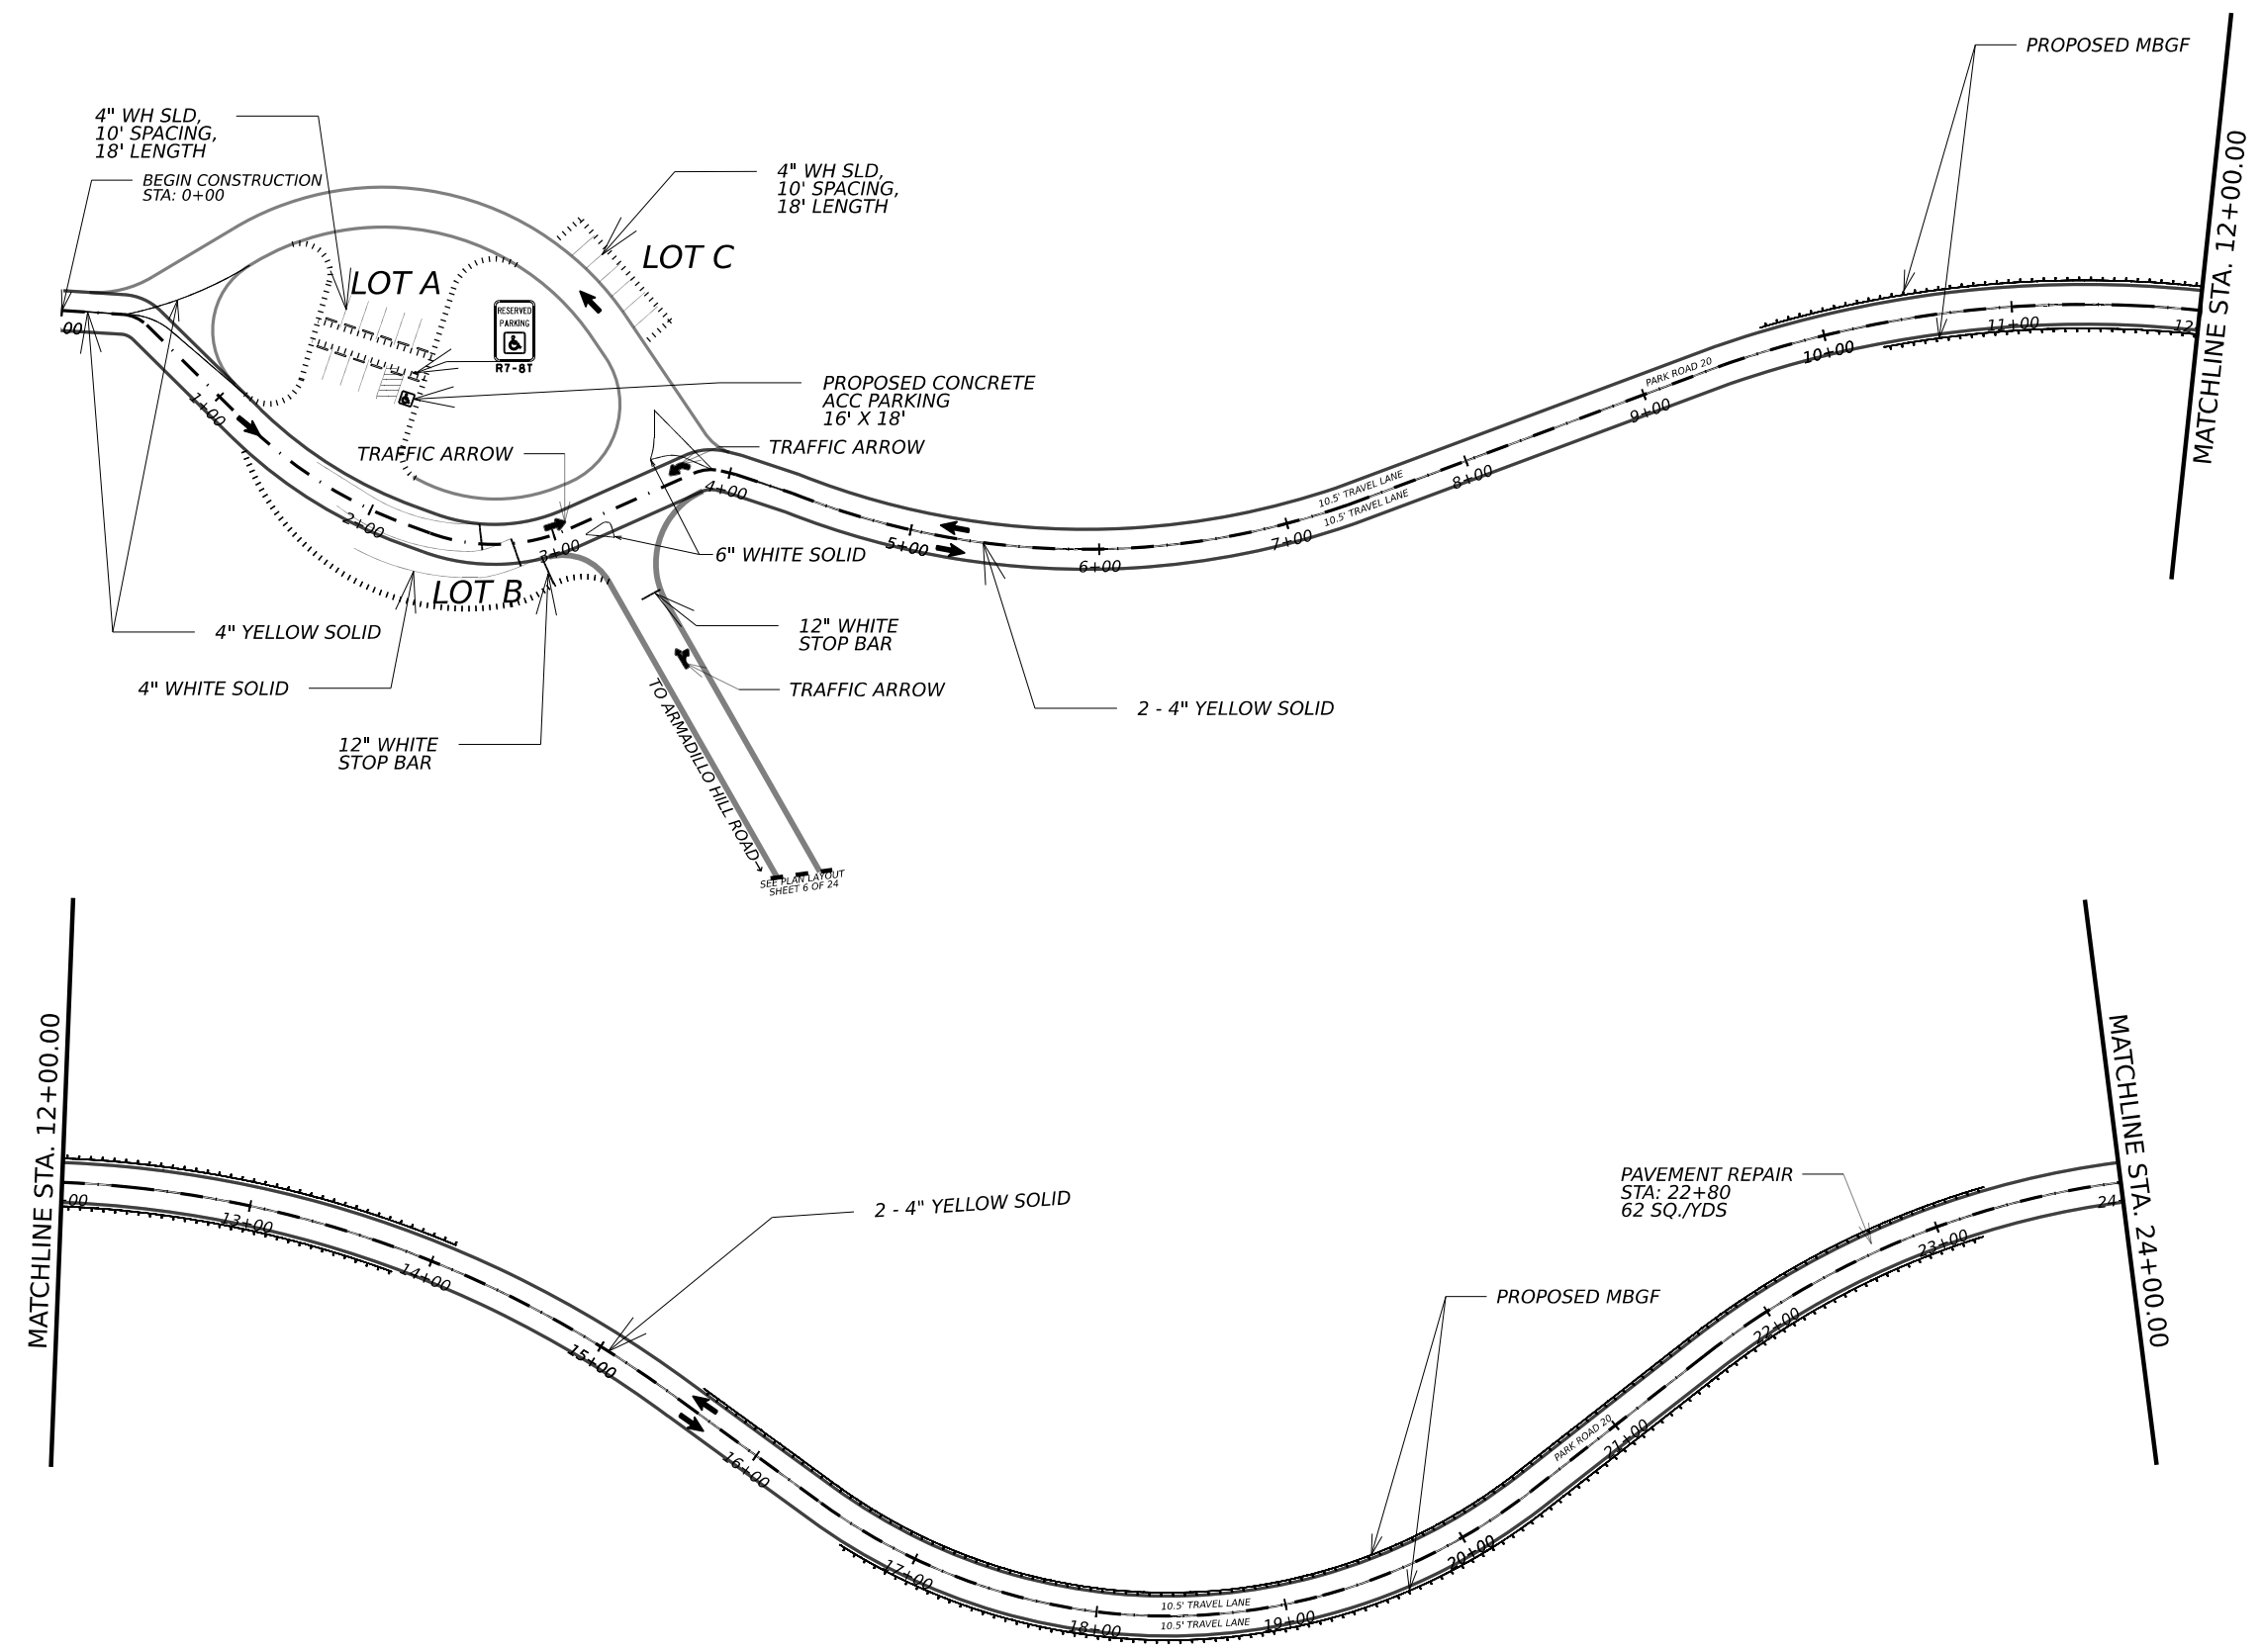

Monte R. Rater P.E.

11.04.22

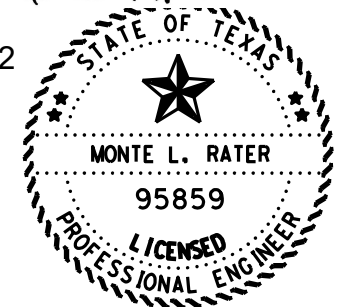

0 50 100
SCALE IN FEET





EISENHOWER STATE PARK
 PARK ROAD 20
 PLAN LAYOUT

©2023 SHEET 1 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	34	


CK:
DW:
CK:
DW:

DATE: 11/2/2022 7:52:23 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ\0901-19-176_etc\Submit\195% Plans\DGNS\034 PLAN LAYOUTS.dgn

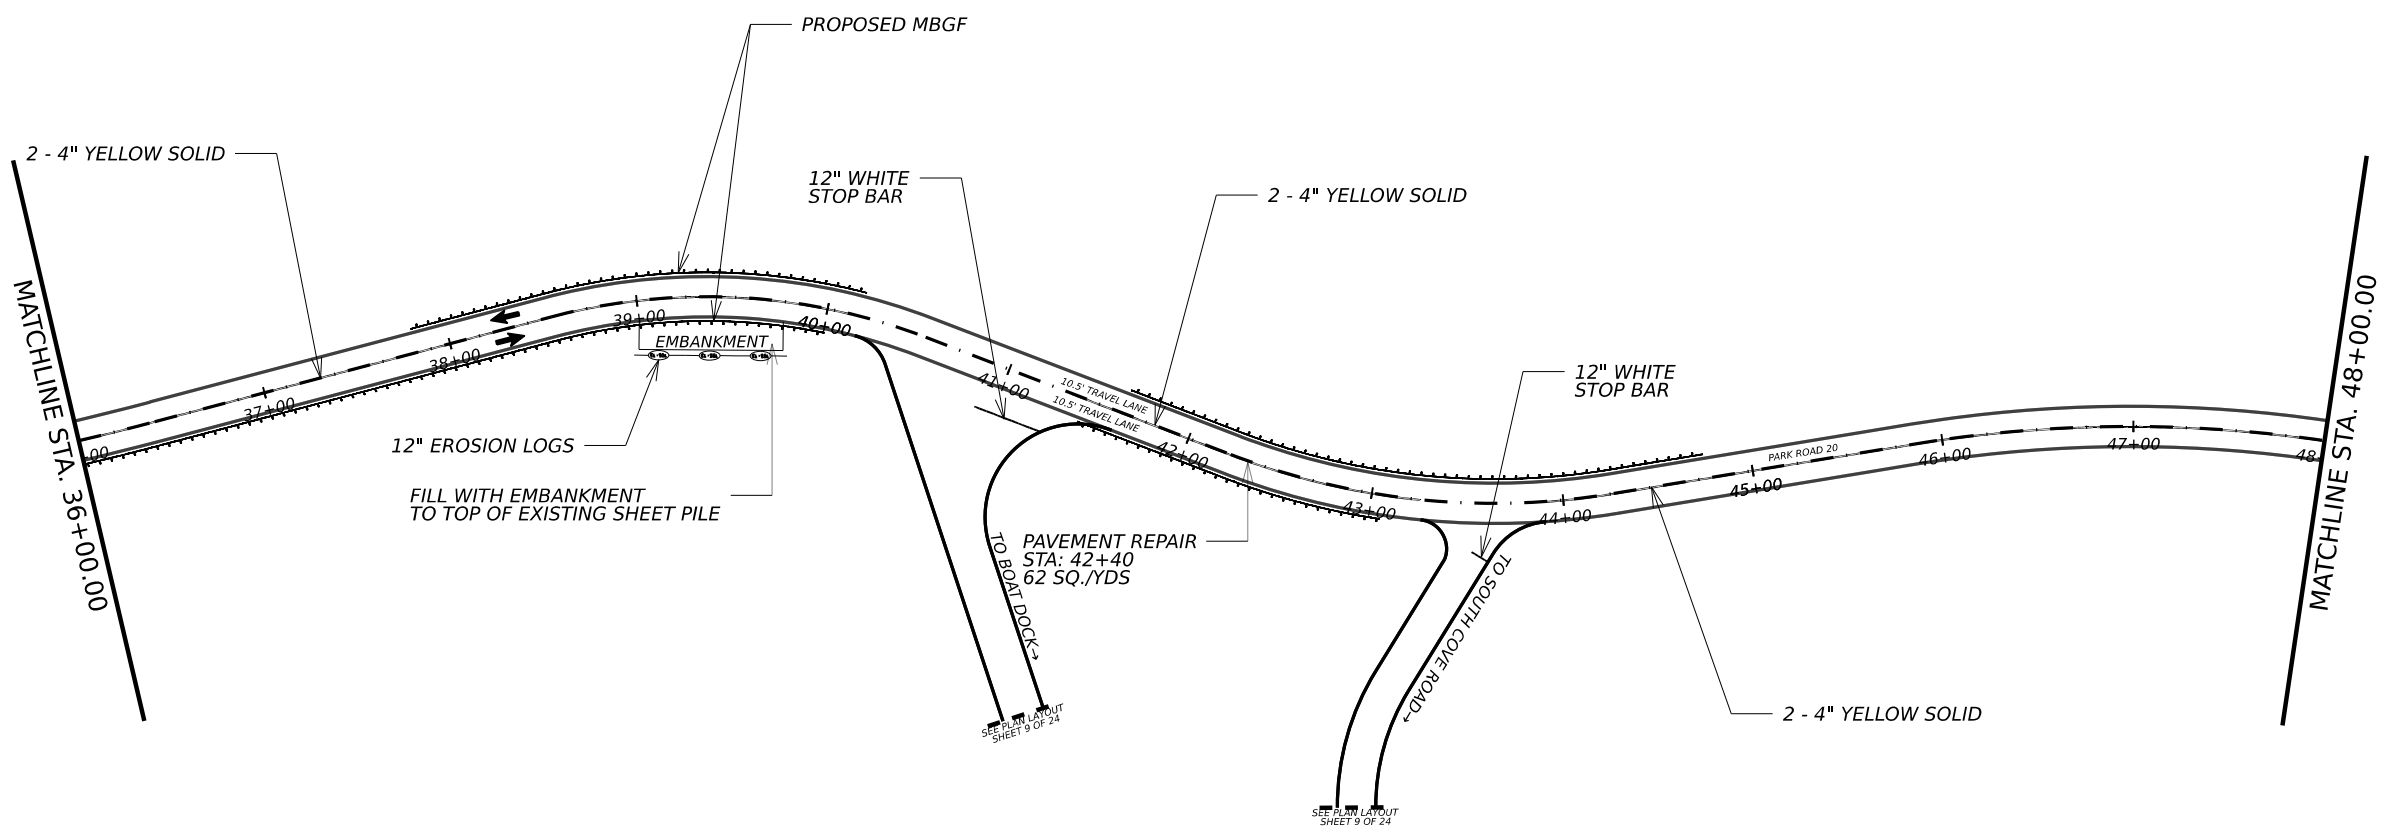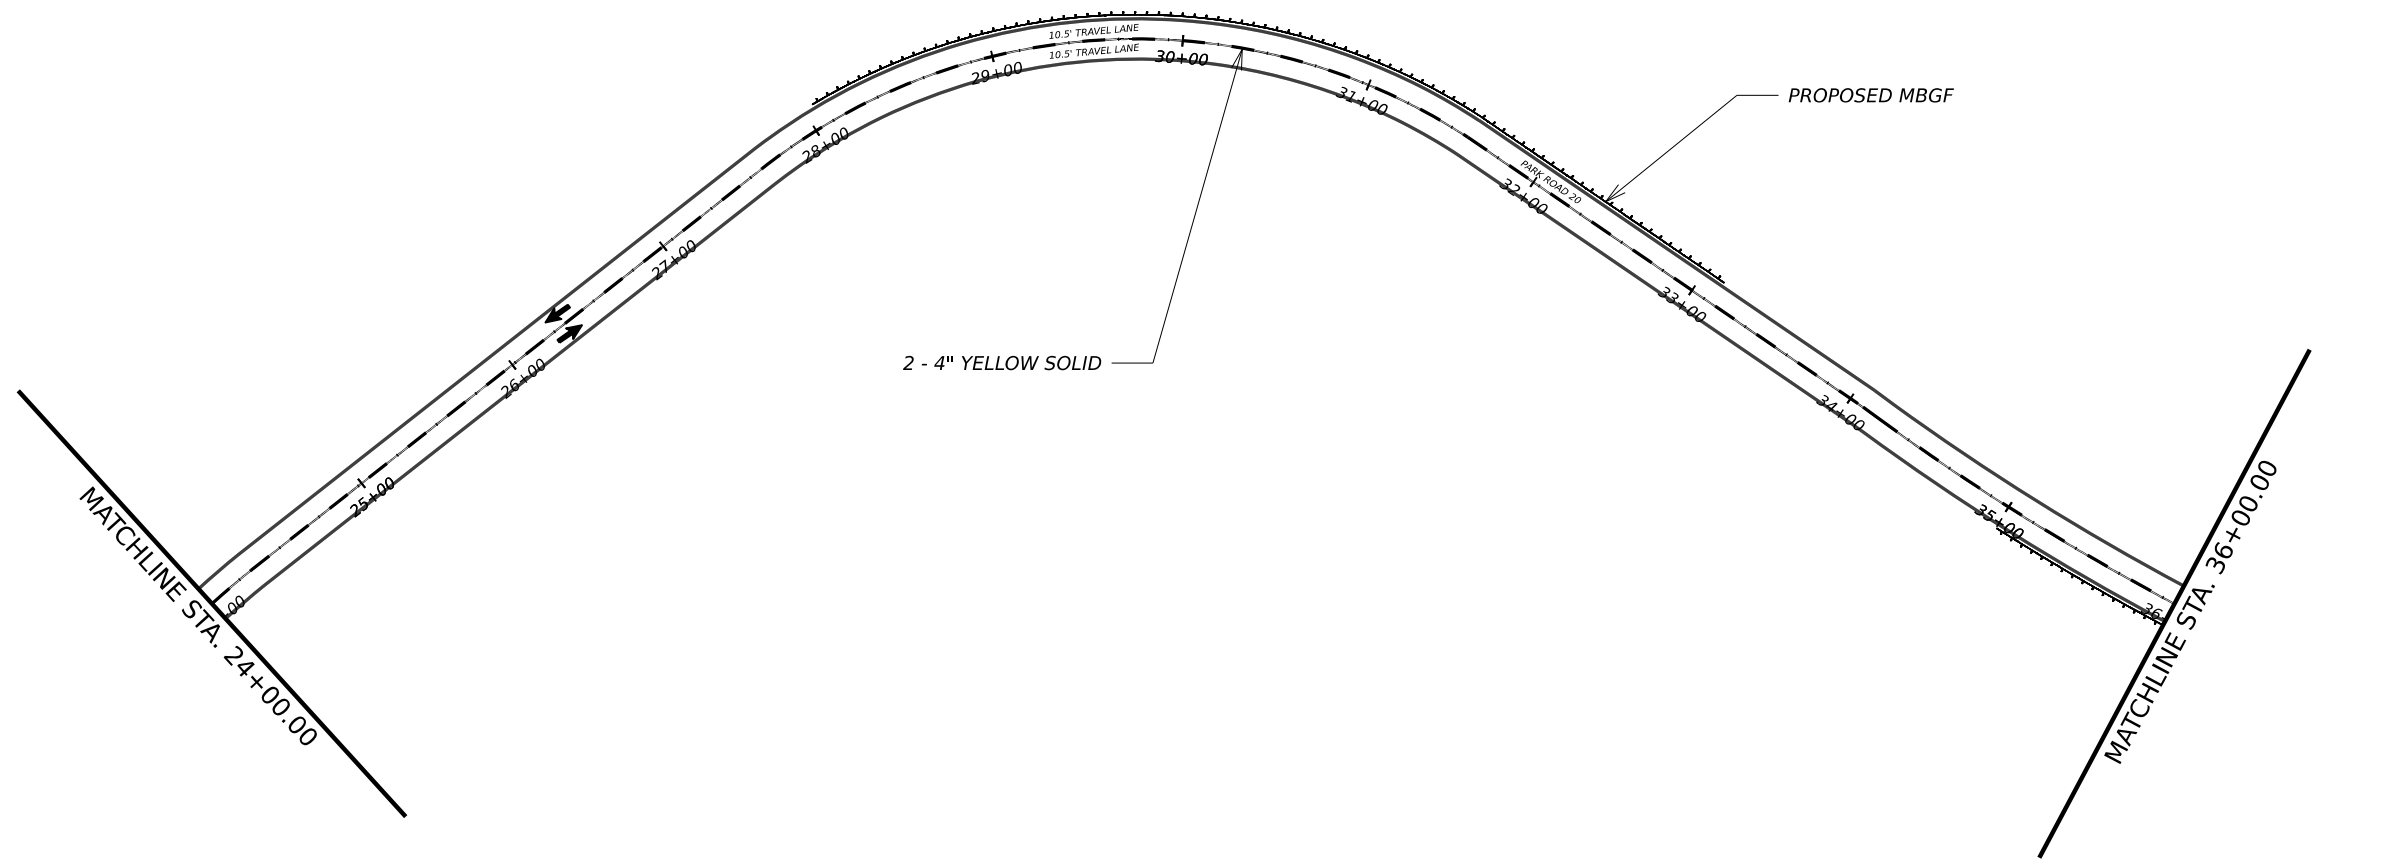

Monte L. Rater P.E.

11.03.22




EISENHOWER STATE PARK
PARK ROAD 20
PLAN LAYOUT

© 2023 SHEET 2 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	35	


CK: DW: CK: DW:

DATE: 11/2/2022 7:52:25 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176_etc\Submit\195% Plans\DGNS\034 PLAN LAYOUTS.dgn

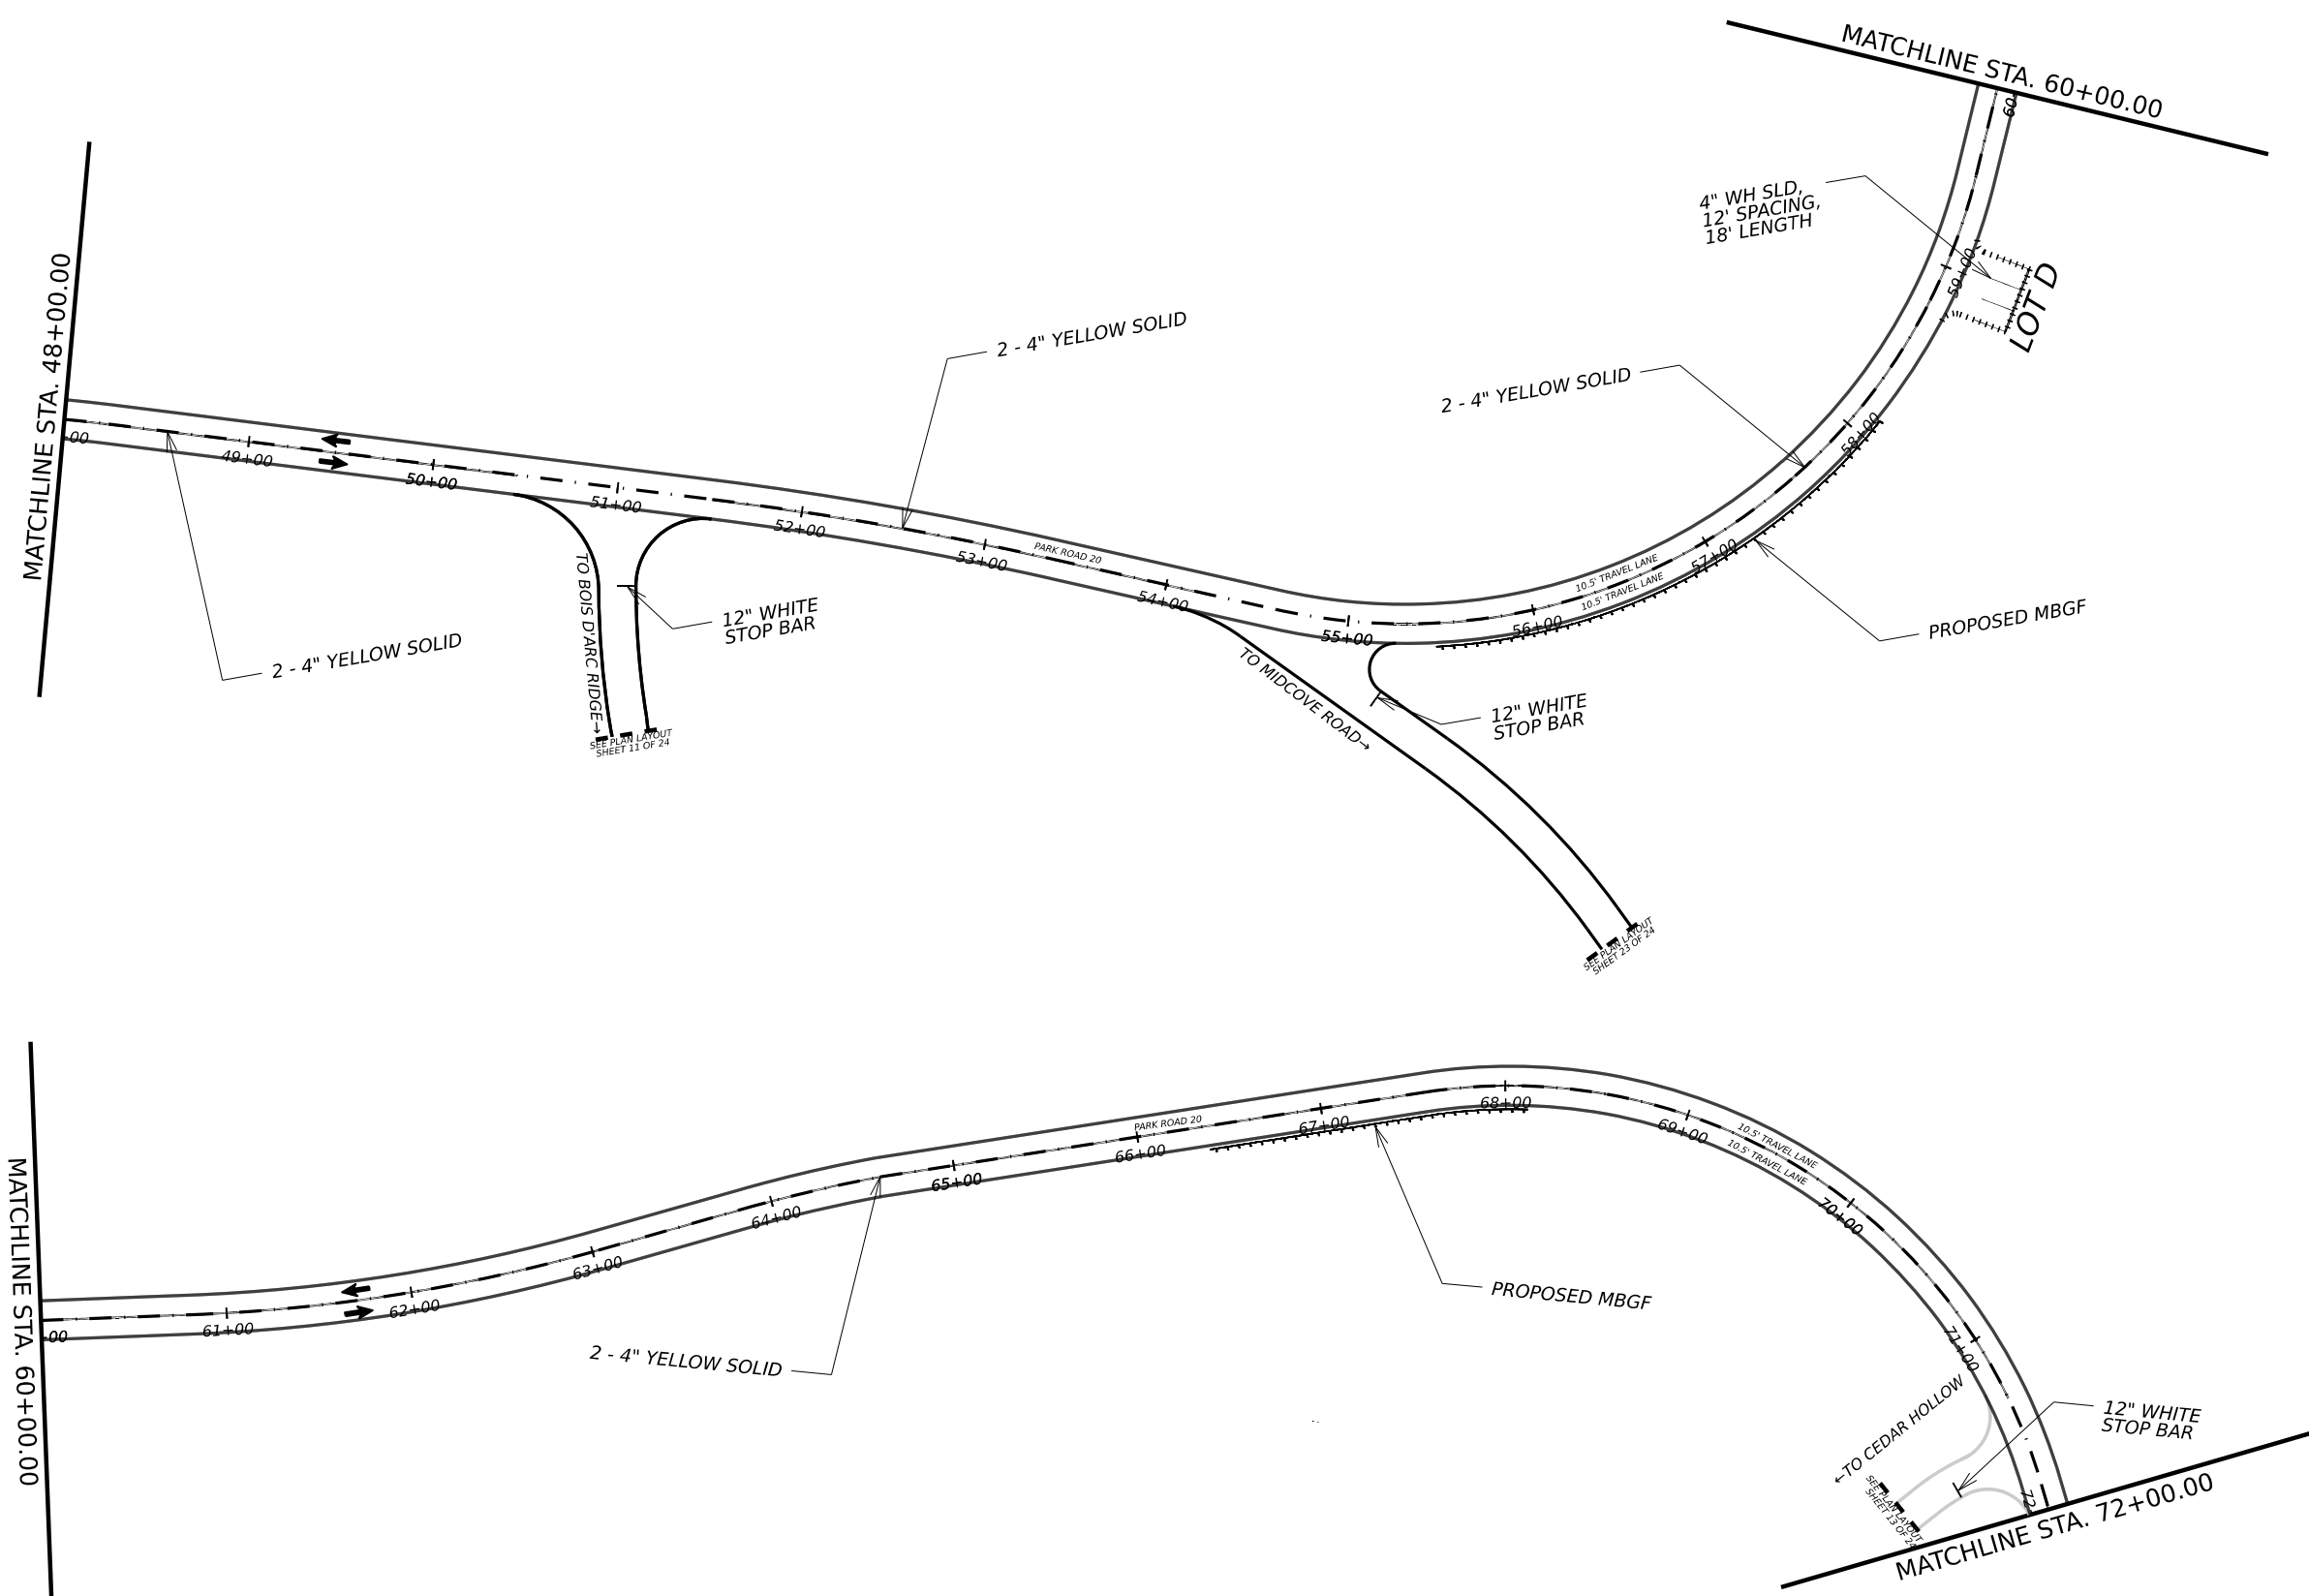


Monte R. Rater P.E.

11.03.22



0 50 100
SCALE IN FEET





EISENHOWER STATE PARK
 PARK ROAD 20
 PLAN LAYOUT

© 2023 SHEET 3 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	36	

CK: DW: CK: DW:

DATE: 11/2/2022 7:52:26 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab projects CS\0901-19-176. etc\Submit\195% Plans\DGNS\034 PLAN LAYOUTS.dgn

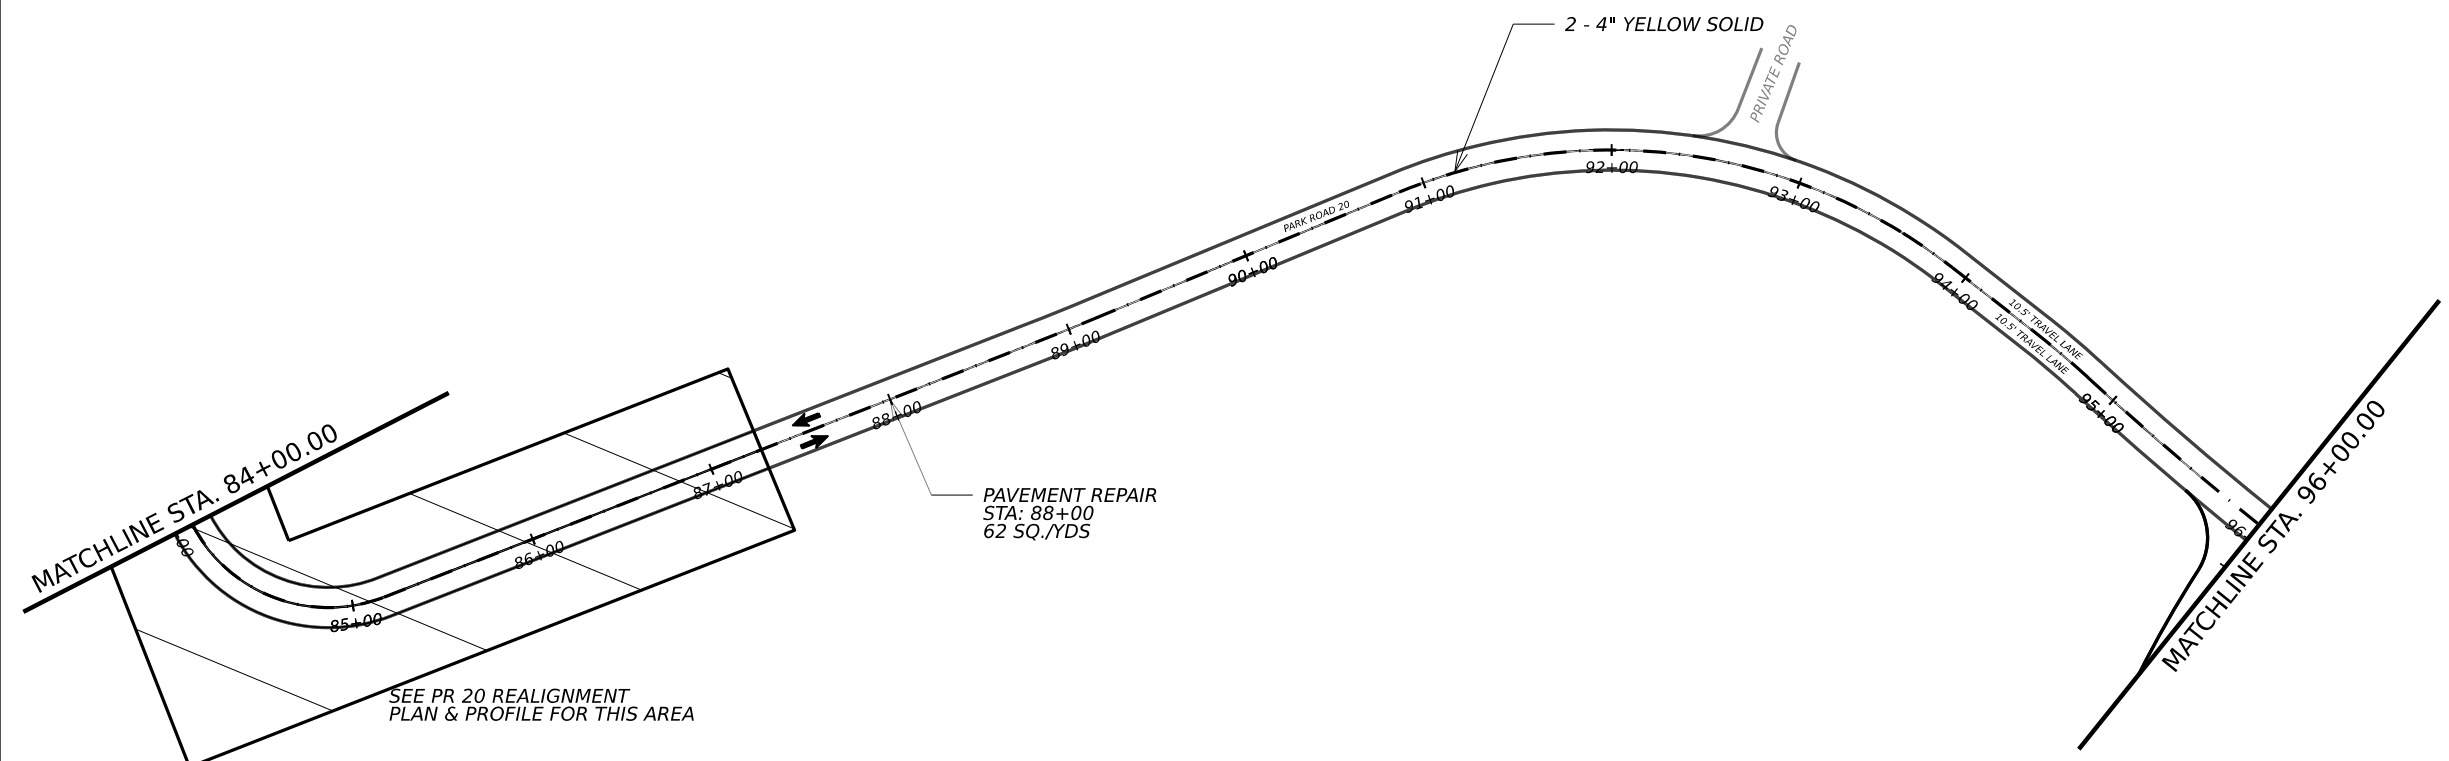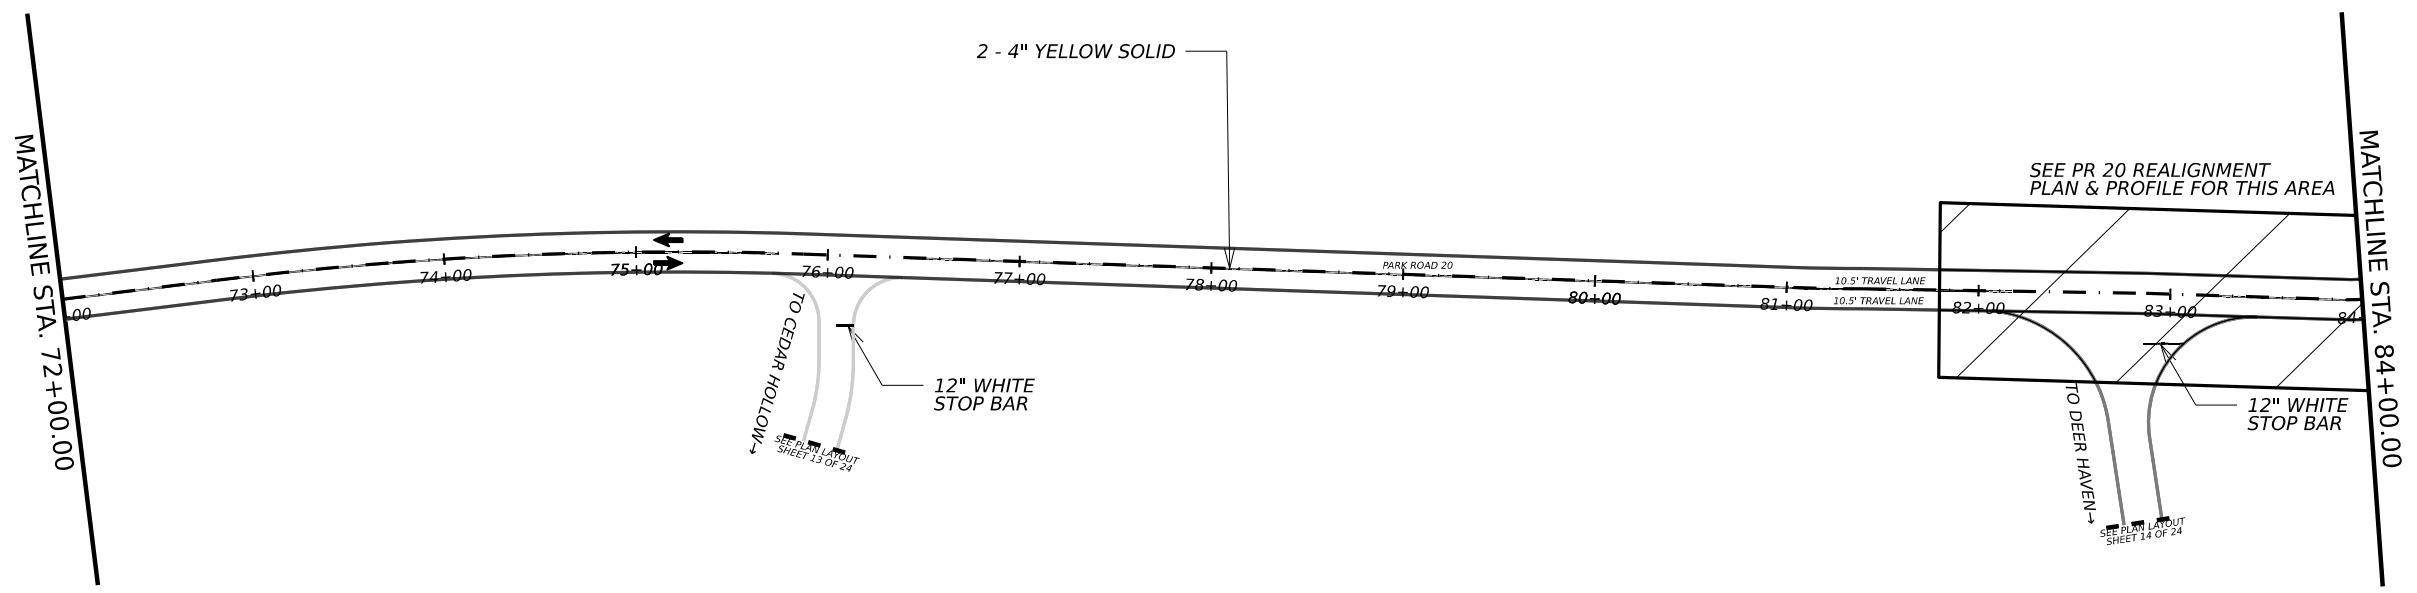

Monte R. Rater P.E.
 11.03.22

0 50 100
 SCALE IN FEET





EISENHOWER STATE PARK
 PARK ROAD 20
 PLAN LAYOUT


© 2023 SHEET 4 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	37	


CK: DW: CK: DW: CK: DW: CK: DW:

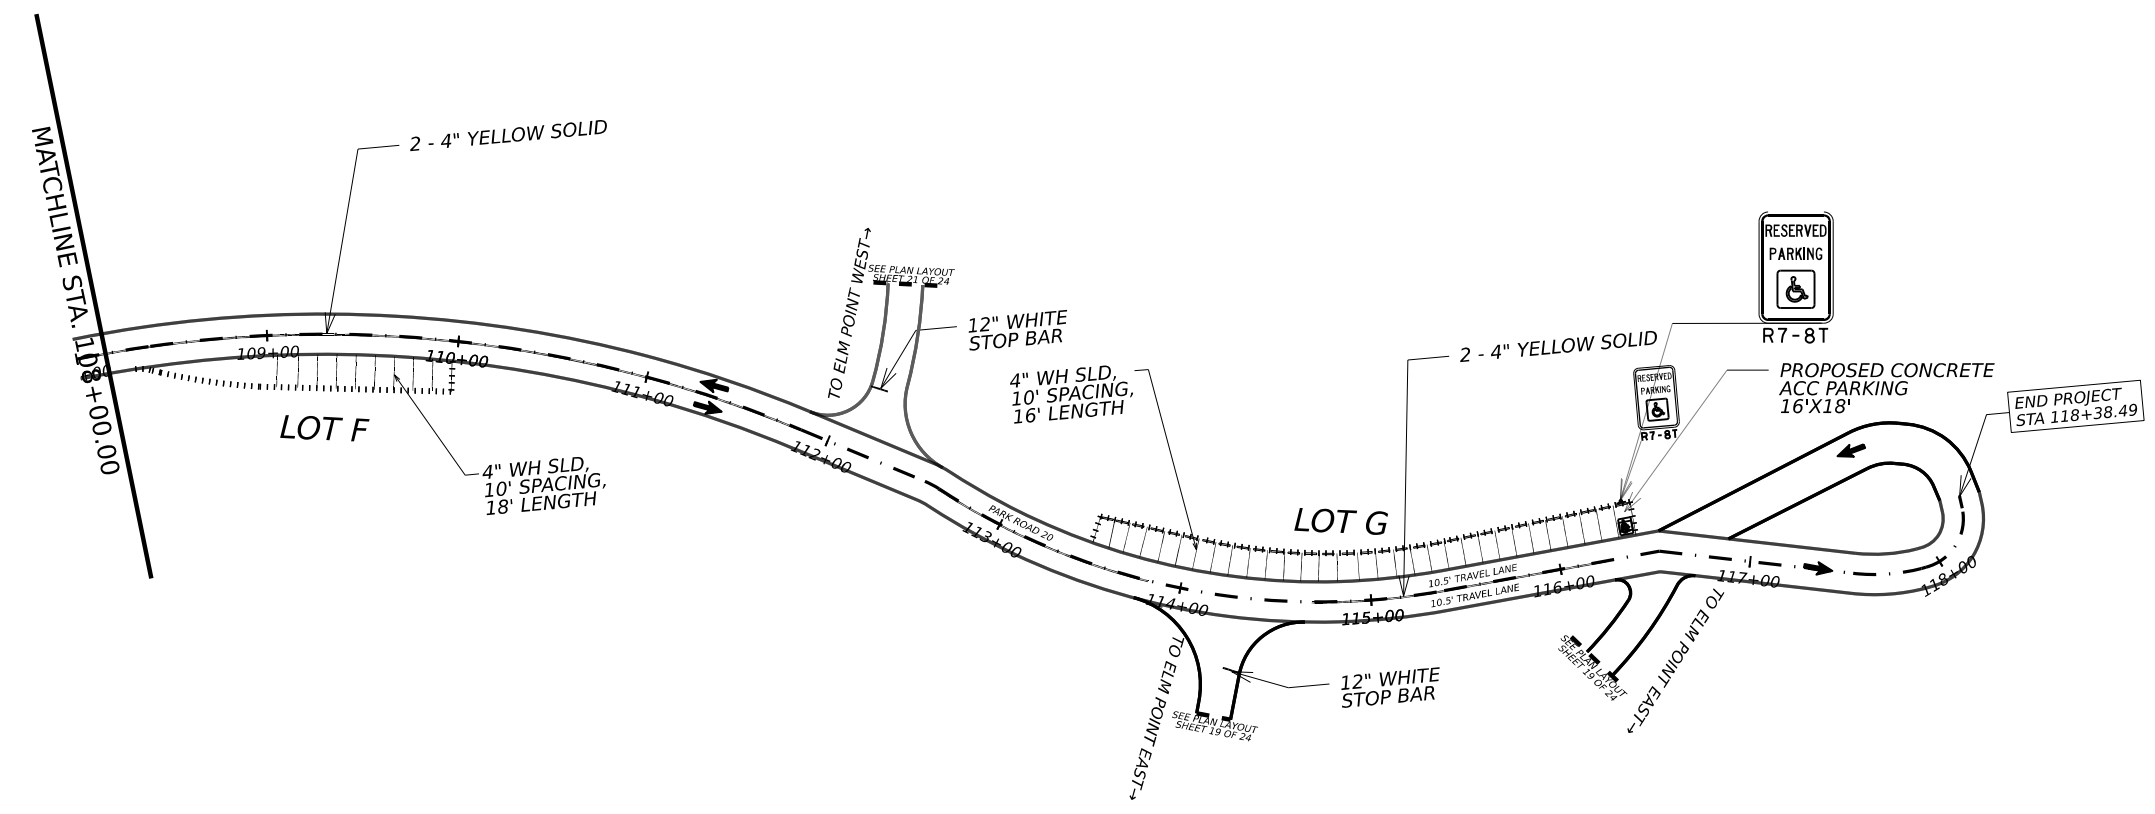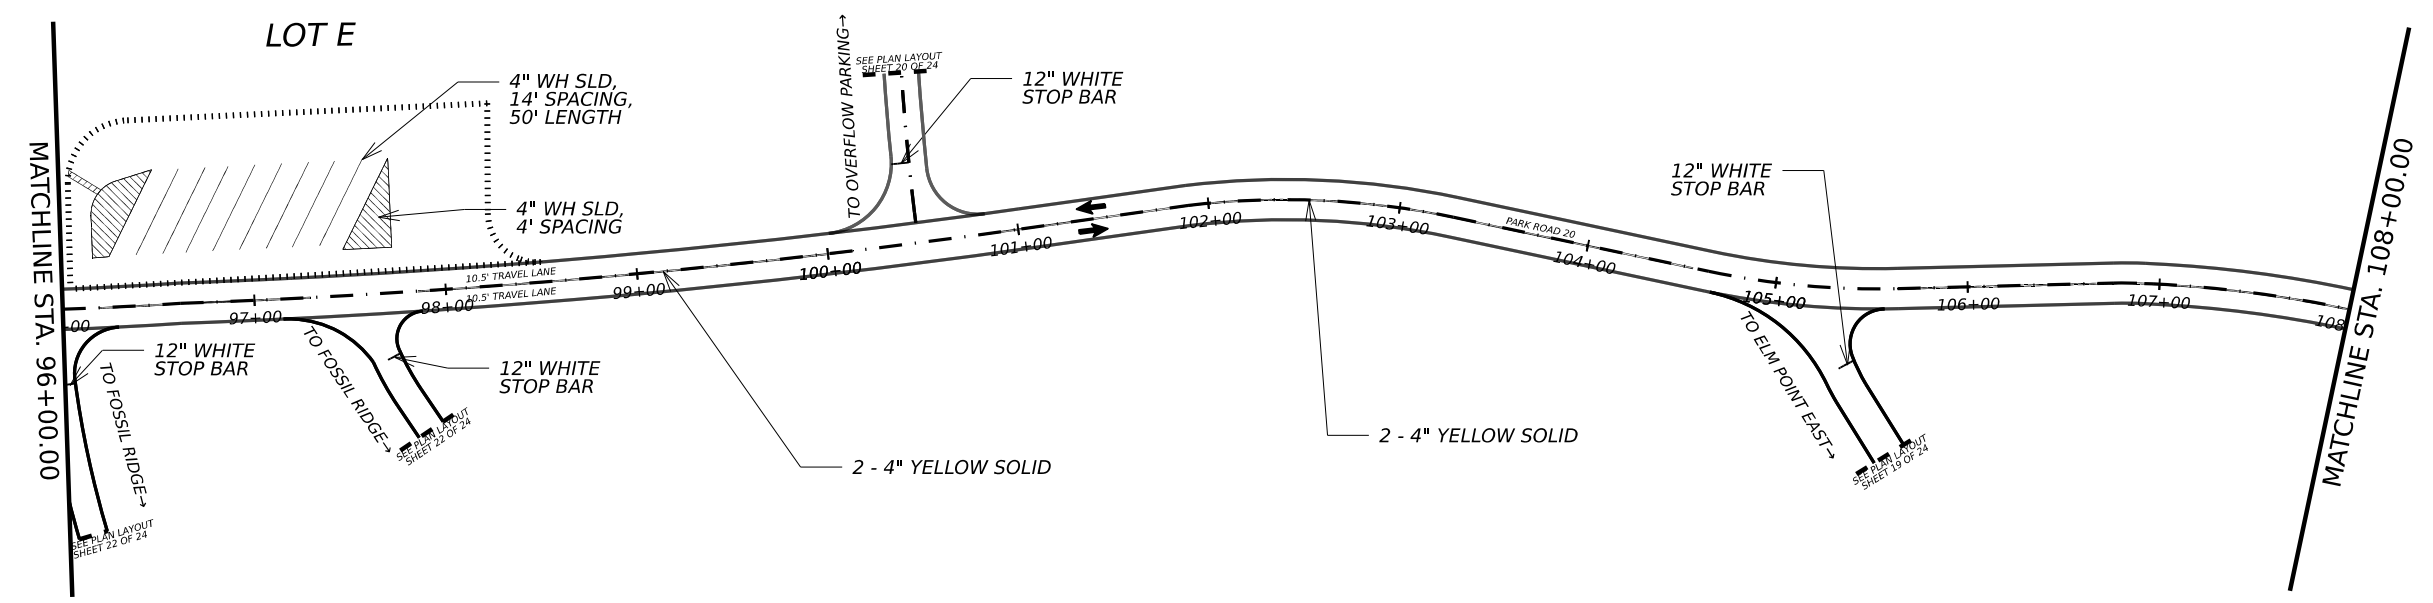

Monte R. Rater P.E.
11.04.22

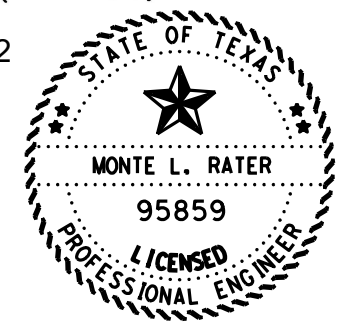

0 50 100
SCALE IN FEET





EISENHOWER STATE PARK
PARK ROAD 20
PLAN LAYOUT

© 2023 SHEET 5 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	38	

DATE: 11/4/2022 8:46:45 AM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ_0901-19-176_et\Submit\195%_Plans\DGNS\034 PLAN LAYOUTS.dgn

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

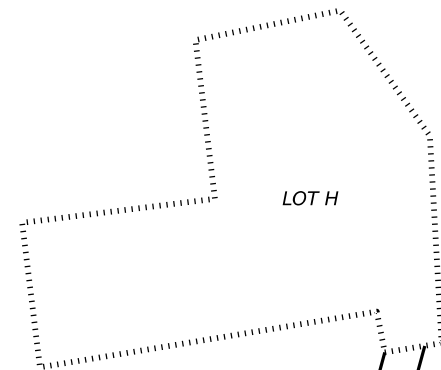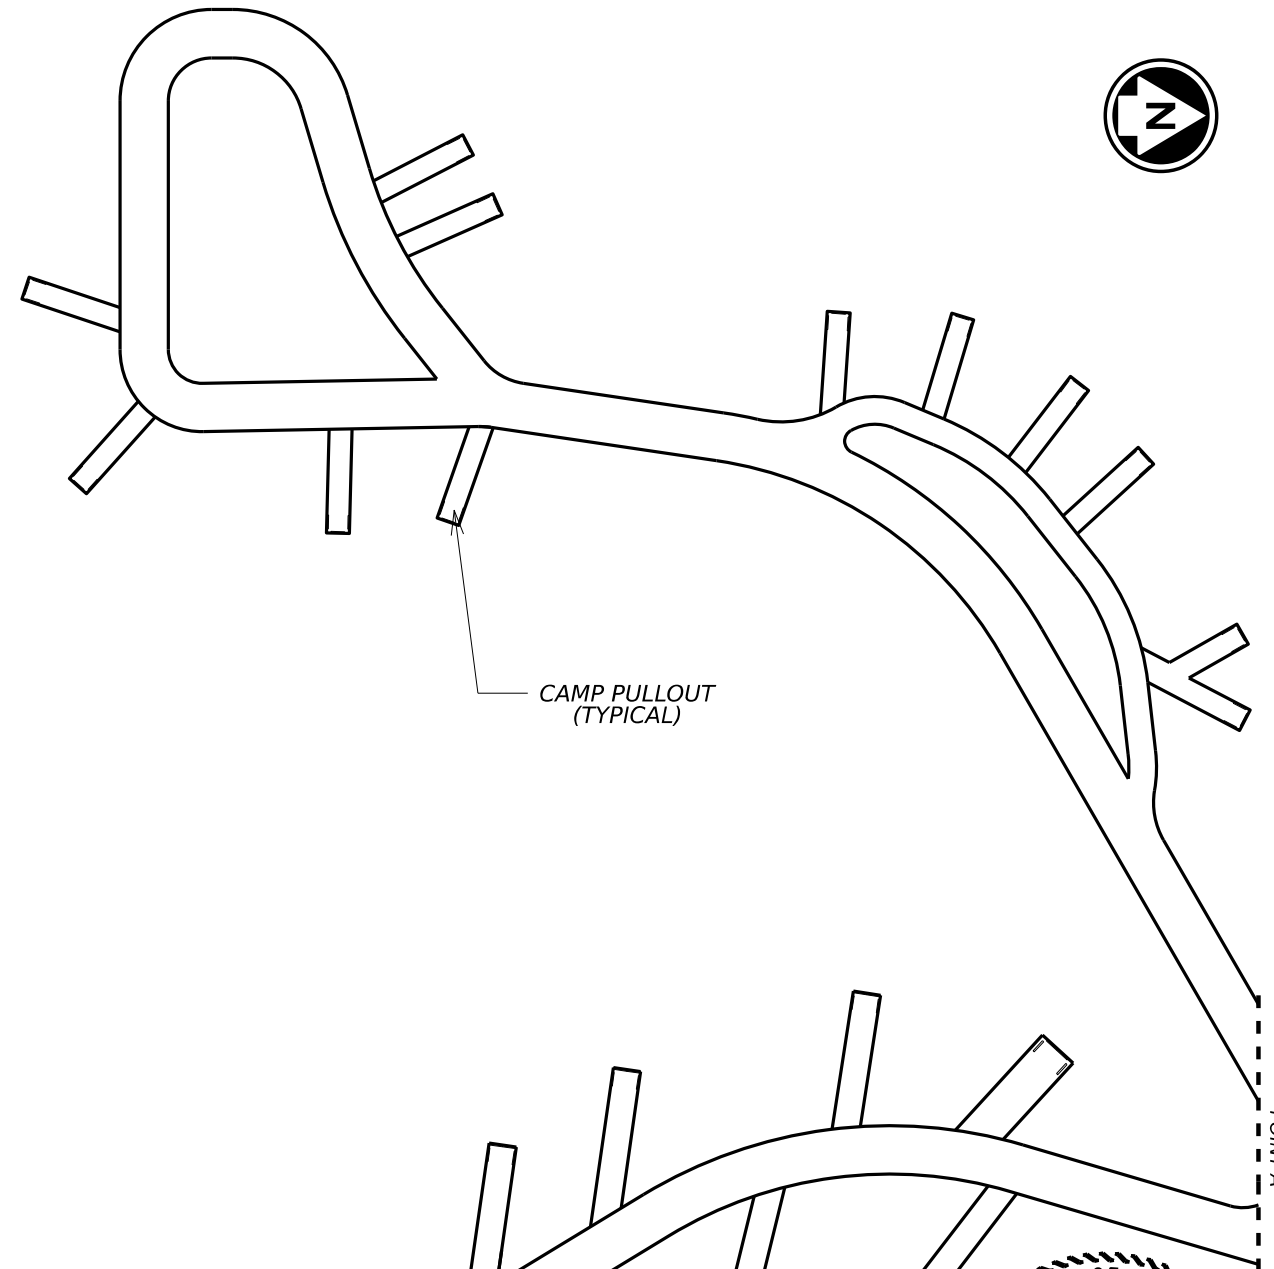

LOT H

CAMP PULLOUT
(TYPICAL)

POINT A

RESIDENT DRIVEWAY

RESIDENT DRIVEWAY




LOT I

4" WH SLD,
10' SPACING,
18' LENGTH


12" WHITE
STOP BAR

PRIVATE ROAD




11.03.22

Monte R. Rater P.E.



EISENHOWER STATE
PARK

ARMADILLO HILL
PLAN LAYOUT



SCALE IN FEET


© 2023 SHEET 6 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	39	

DATE: 11/2/2022 7:56:28 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CS\0901-19-176.etc\Submit\95% Plans\DGNS\039 PLAN LAYOUTS.dgn


CK: DW: CK: DW:

CK: DW: CK: DW: CK: DW:

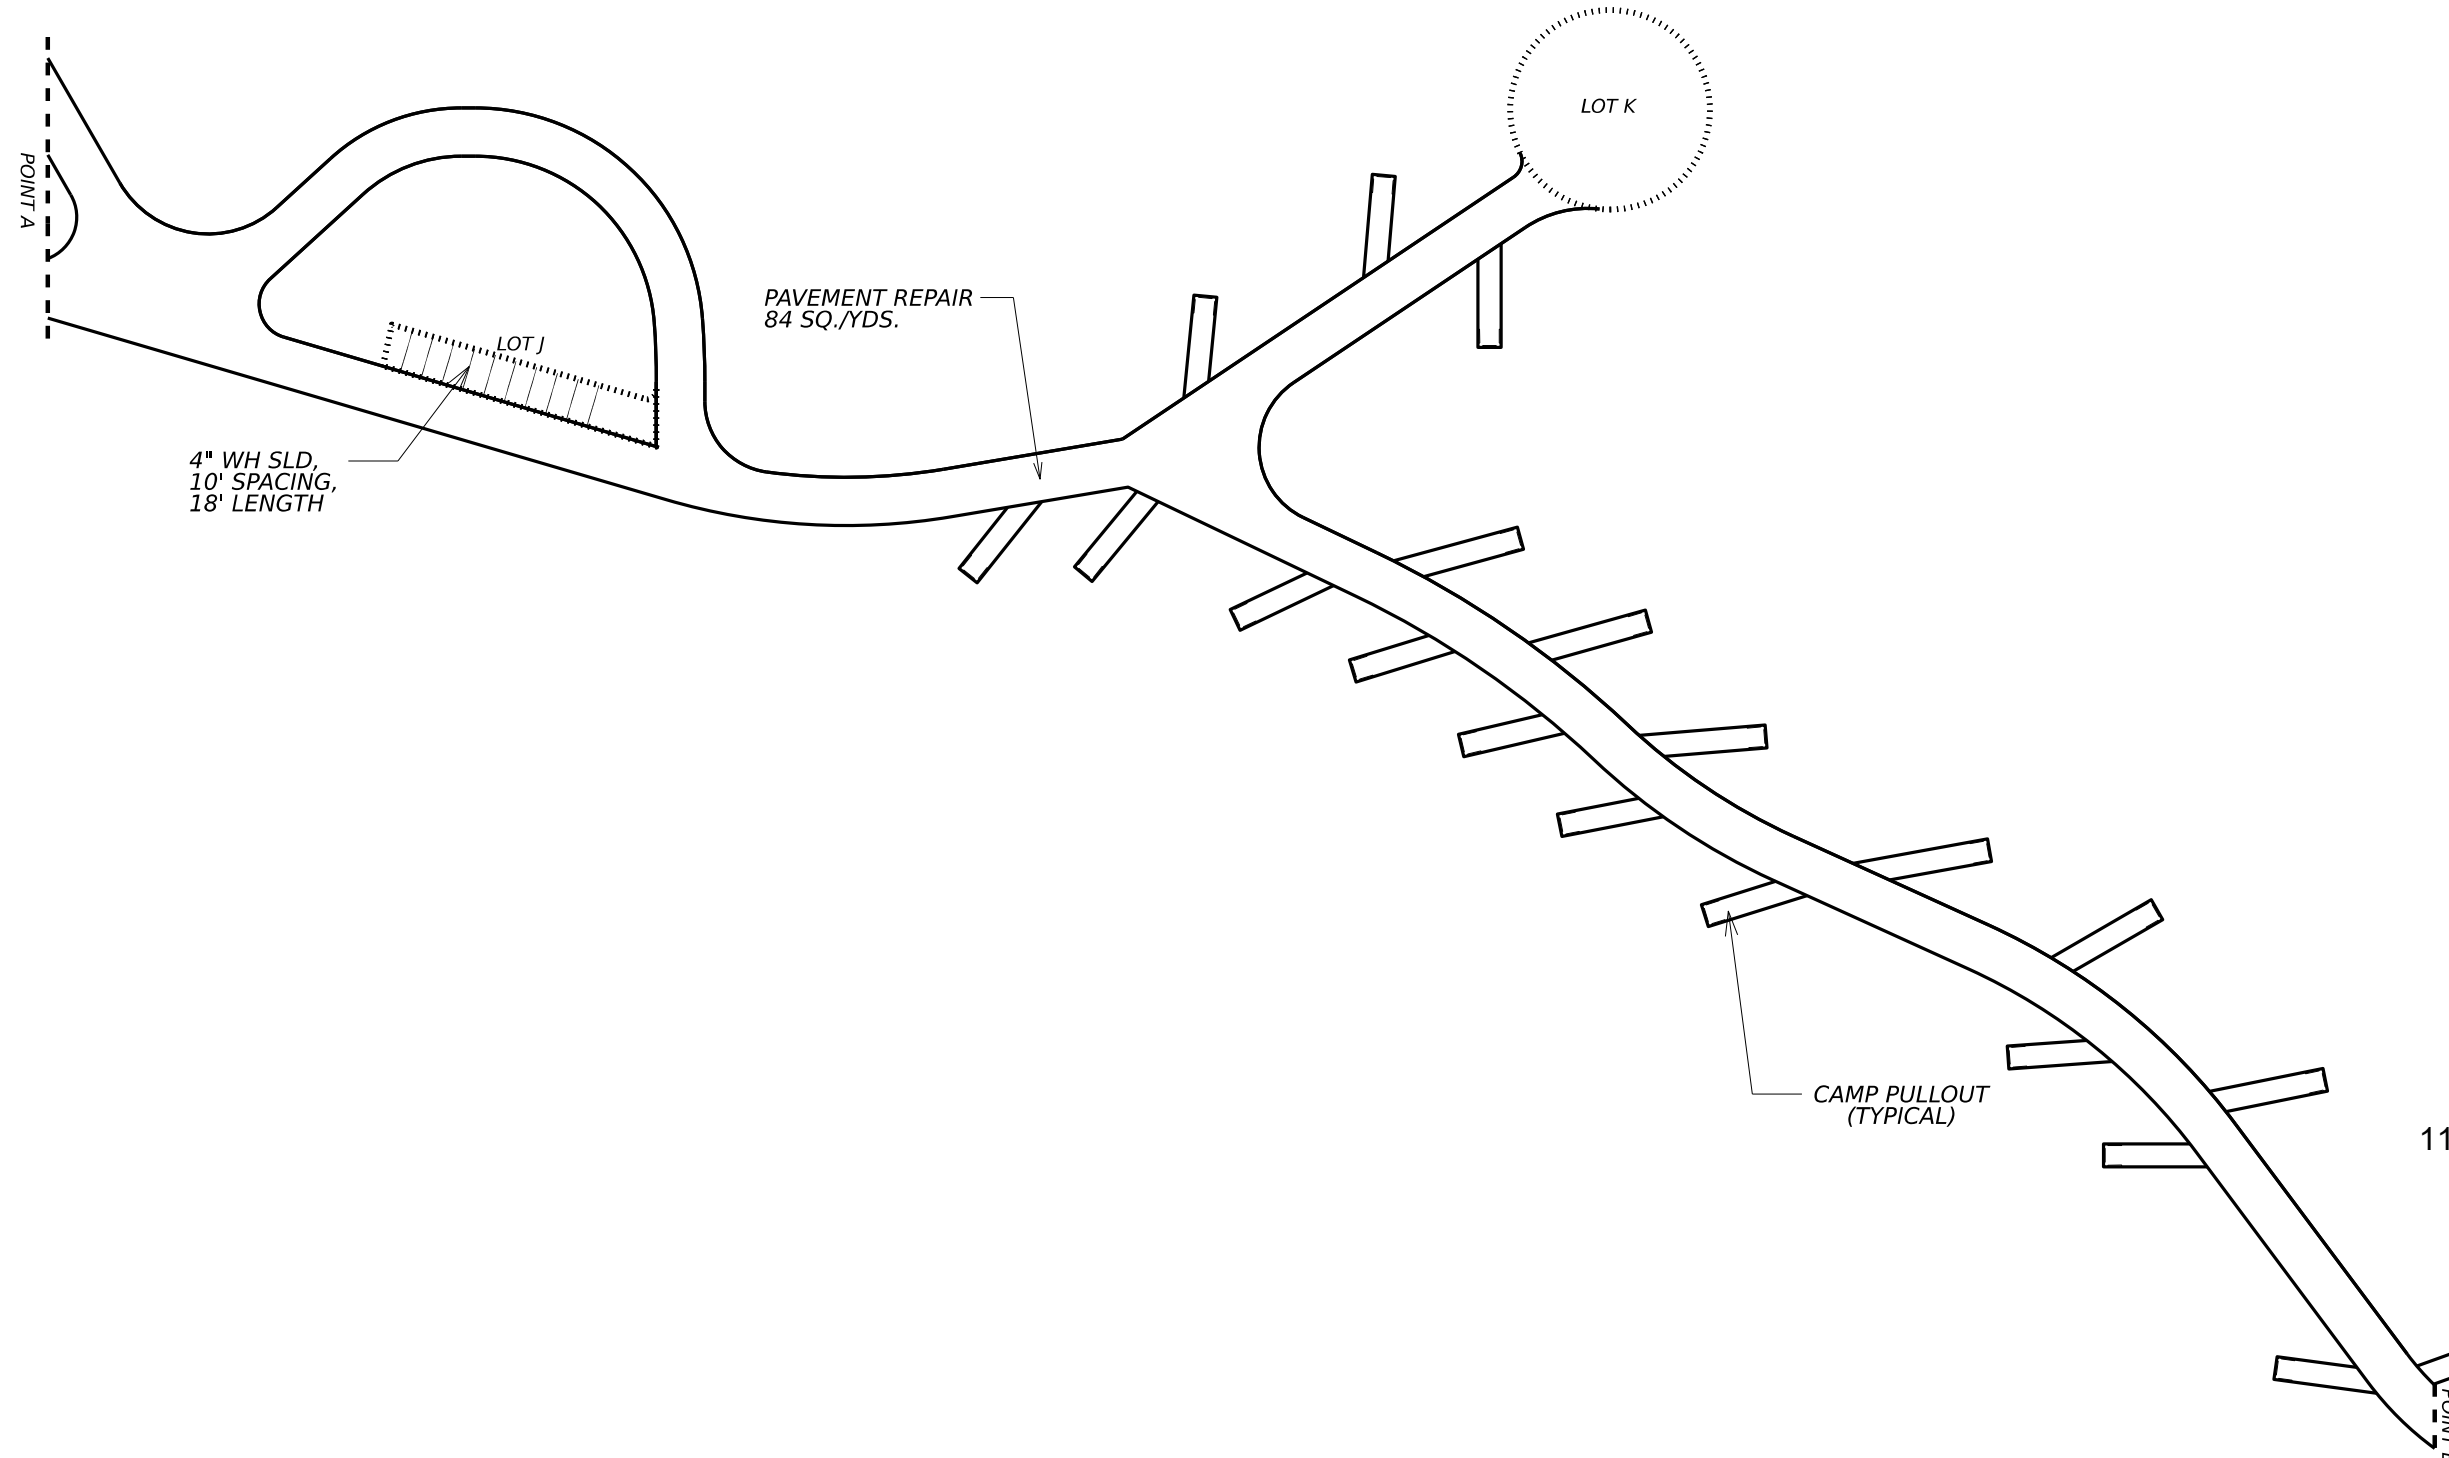

Monte R. Rater P.E.

11.03.22



**OVERLAY ONLY,
ALL AREAS
ON THIS SHEET**



**EISENHOWER STATE
PARK**
**ARMADILLO HILL
PLAN LAYOUT**


© 2023 SHEET 7 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST		COUNTY	SHEET NO.
PAR		GRAYSON	40

DATE: 11/9/2022 4:13:55 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ_0901-19-176_etcl\Submit\195% Plans\DGNS\040 PLAN LAYOUTS.dgn



DN: CK: DW: CK:

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

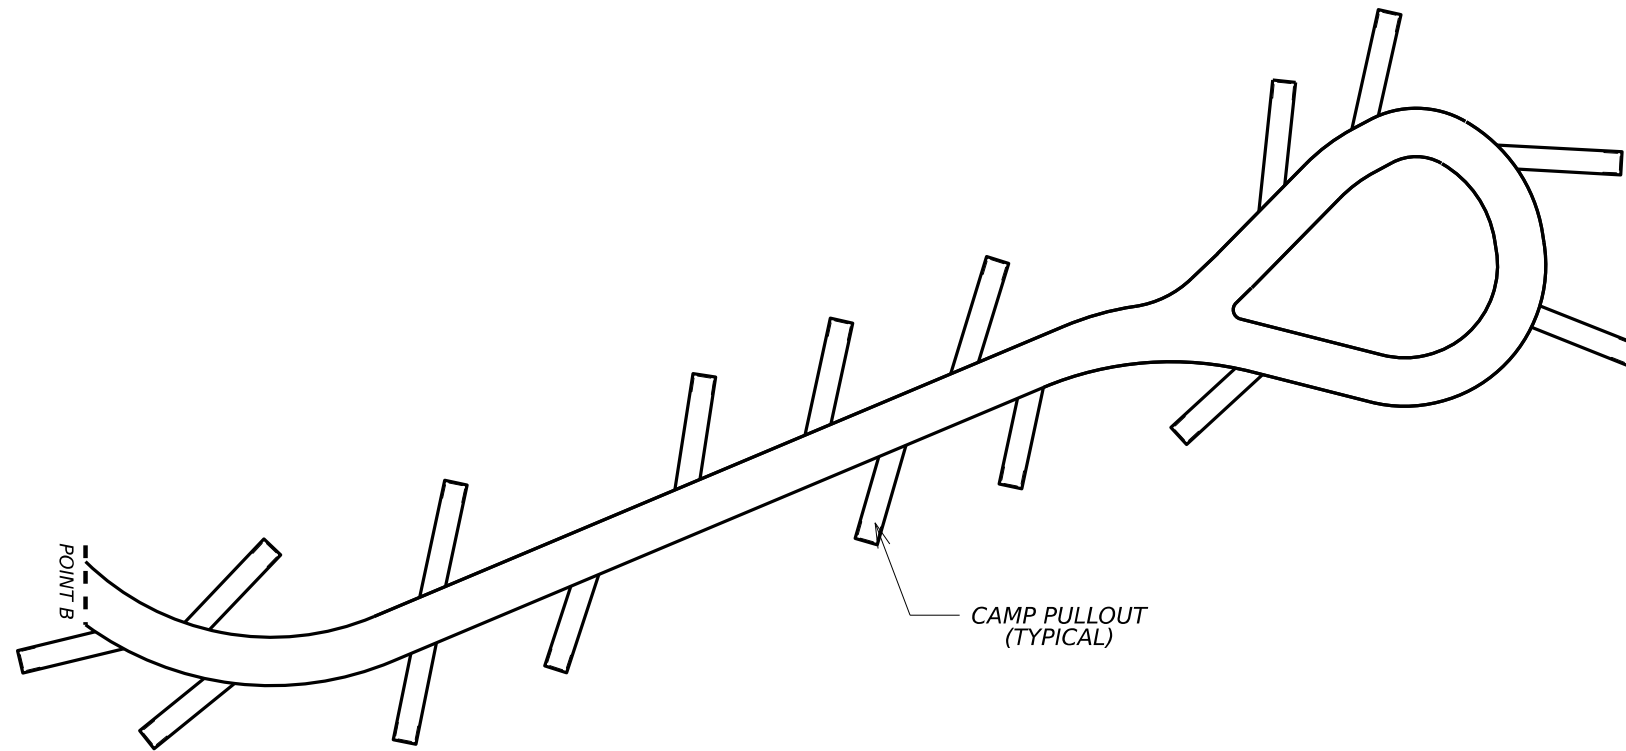

Monte L. Rater P.E.

11.03.22



EISENHOWER STATE
PARK

ARMADILLO HILL
PLAN LAYOUT

© 2023



SHEET 8 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	41	

DATE: 11/2/2022 7:56:30 PM
FILE: C:\06\0615\MANA\071\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ_0901-19-176_etc\Submit\95% Plans\DGNS\041 PLAN LAYOUTS.dgn

CK: DW: CK: DW:

OVERLAY ONLY, ALL
AREAS ON THIS SHEET
EXCEPT WERE REHAB
WORK IS INDICATED

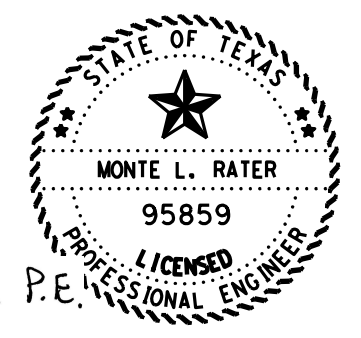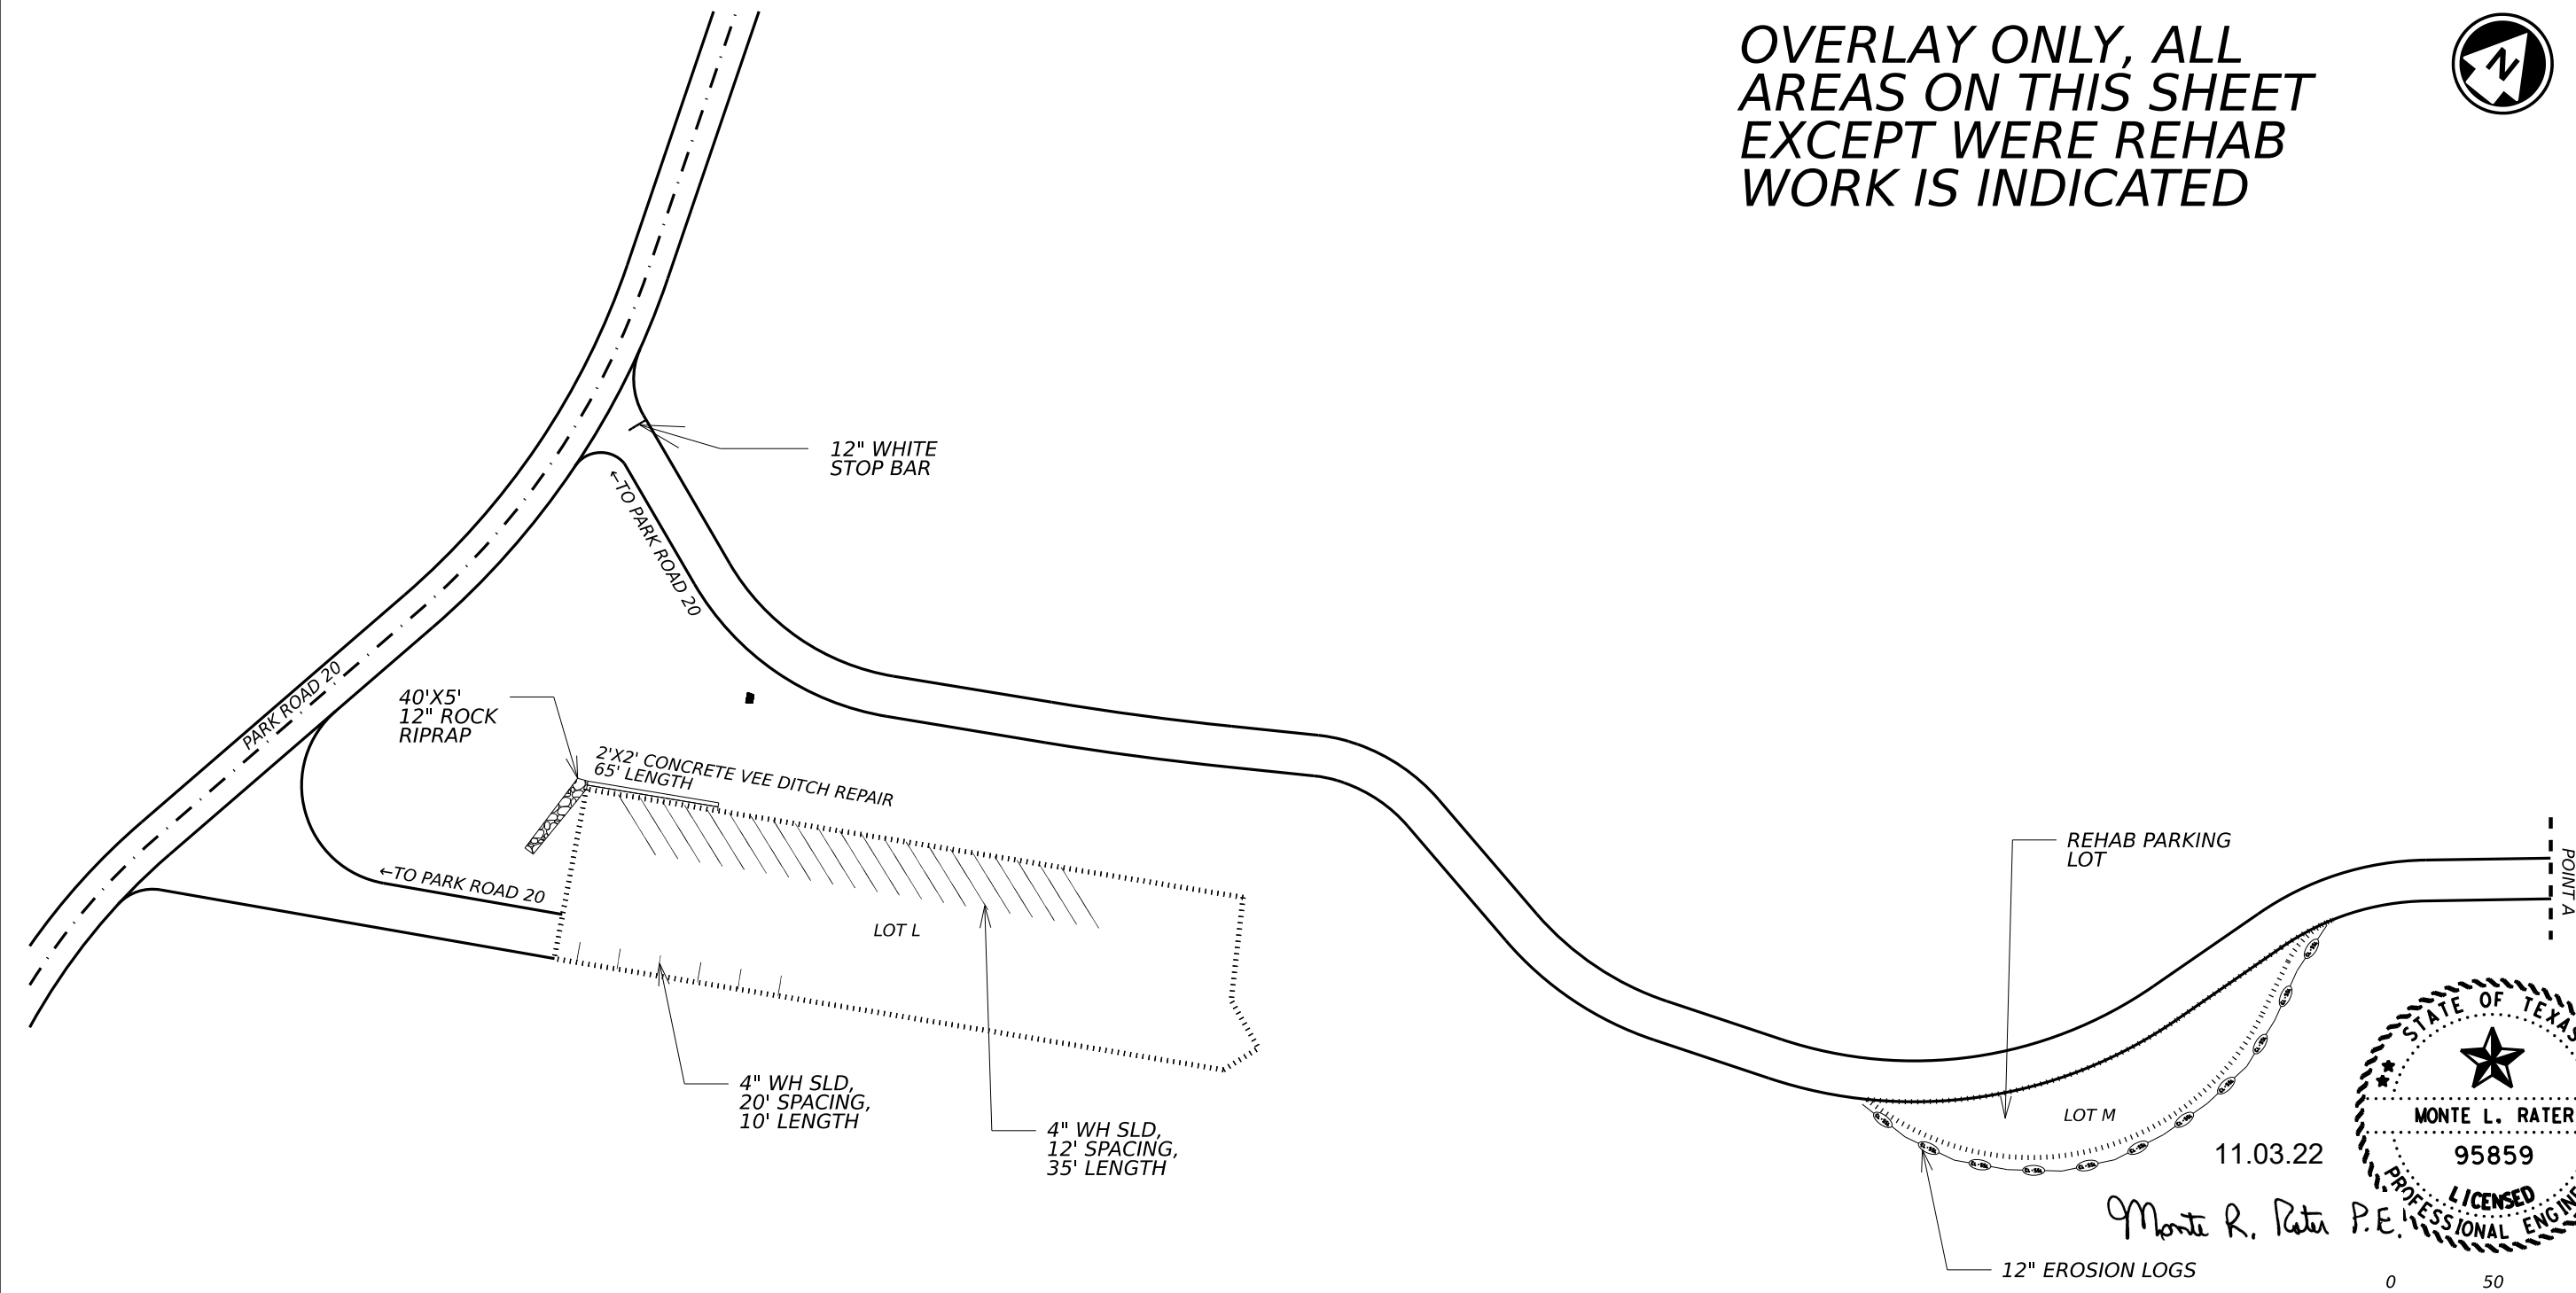

EISENHOWER STATE PARK
BOAT DOCK & SOUTH COVE
PLAN LAYOUT

© 2023 SHEET 9 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	42	

DATE: 11/2/2022 7:56:31 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab\projects\CSJ\0901-19-176_etc\Submittal\95% Plans\DGNS\042 PLAN LAYOUTS.dgn

OVERLAY ONLY, ALL
AREAS ON THIS SHEET
EXCEPT WERE REHAB
WORK IS INDICATED



STAB BASE REMOVAL TO BE PERFORMED BY TXDOT.
FINISHING WORK TO BE PERFORMED BY TPWD.


STAB BASE REMOVAL

REHAB ALL
PARKING LOTS

LOT Q

Monte R. Rater P.E.

11.03.22



POINT A

LOT N

LOT O

LOT P

12" EROSION LOGS

REHAB ALL
PARKING LOTS



EISENHOWER STATE
PARK
BOAT DOCK & SOUTH COVE
PLAN LAYOUT


© 2023 SHEET 10 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	43	

DATE: 11/2/2022 7:56:33 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab projects CS\0901-19-176.etc\Submit\95% Plans\DGNS\043 PLAN LAYOUTS.dgn

CK: DW: CK: DW:

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

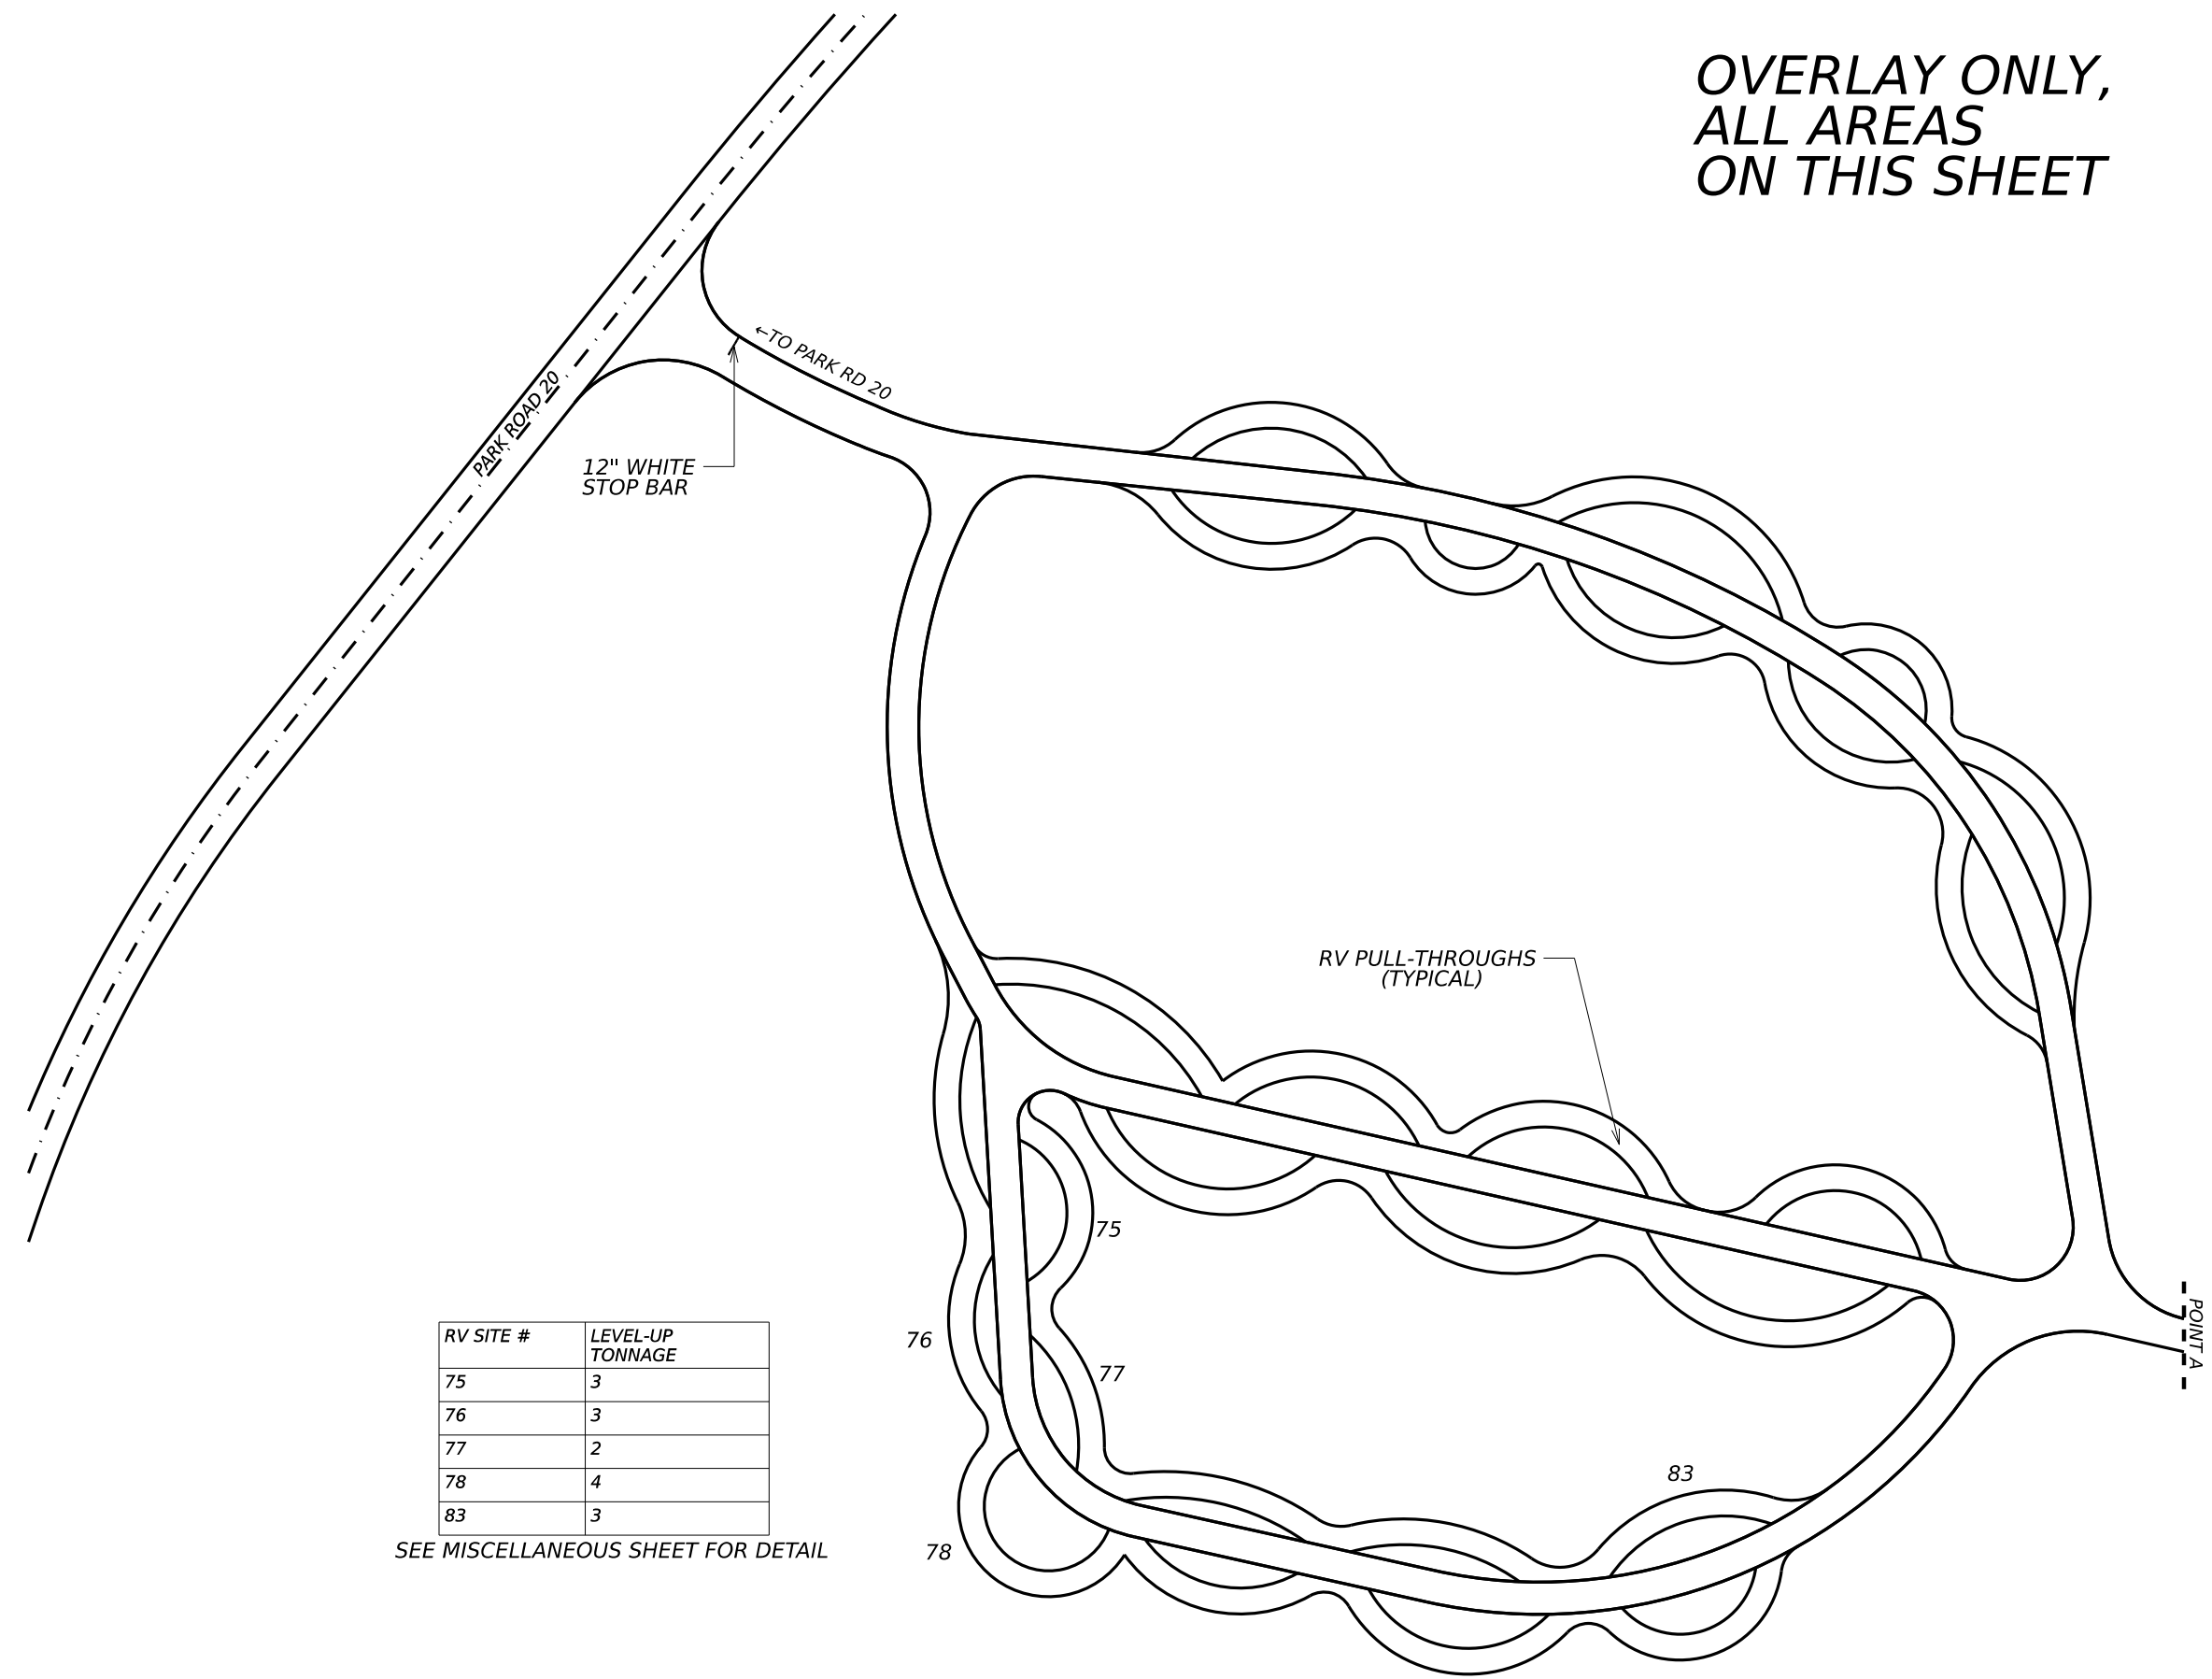

RV SITE #	LEVEL-UP TONNAGE
75	3
76	3
77	2
78	4
83	3

SEE MISCELLANEOUS SHEET FOR DETAIL

Monte R. Rater P.E.
11.03.22



EISENHOWER STATE PARK
BOIS D'ARC RIDGE
PLAN LAYOUT

© 2023 SHEET 11 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	44	


DATE: 11/2/2022 7:56:34 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab\projects\CS\0901-19-176_etcl\Submittal\95% Plans\DGNS\044 PLAN LAYOUTS.dgn

CK: DW: CK: DW:



RV SITE #	LEVEL UP TONNAGE
85	4
86	3
90	3
91	3
92	3
93	3
94	3
96	4
97	3
102	4
104	4
106	4

SEE MISCELLANEOUS SHEET FOR DETAIL

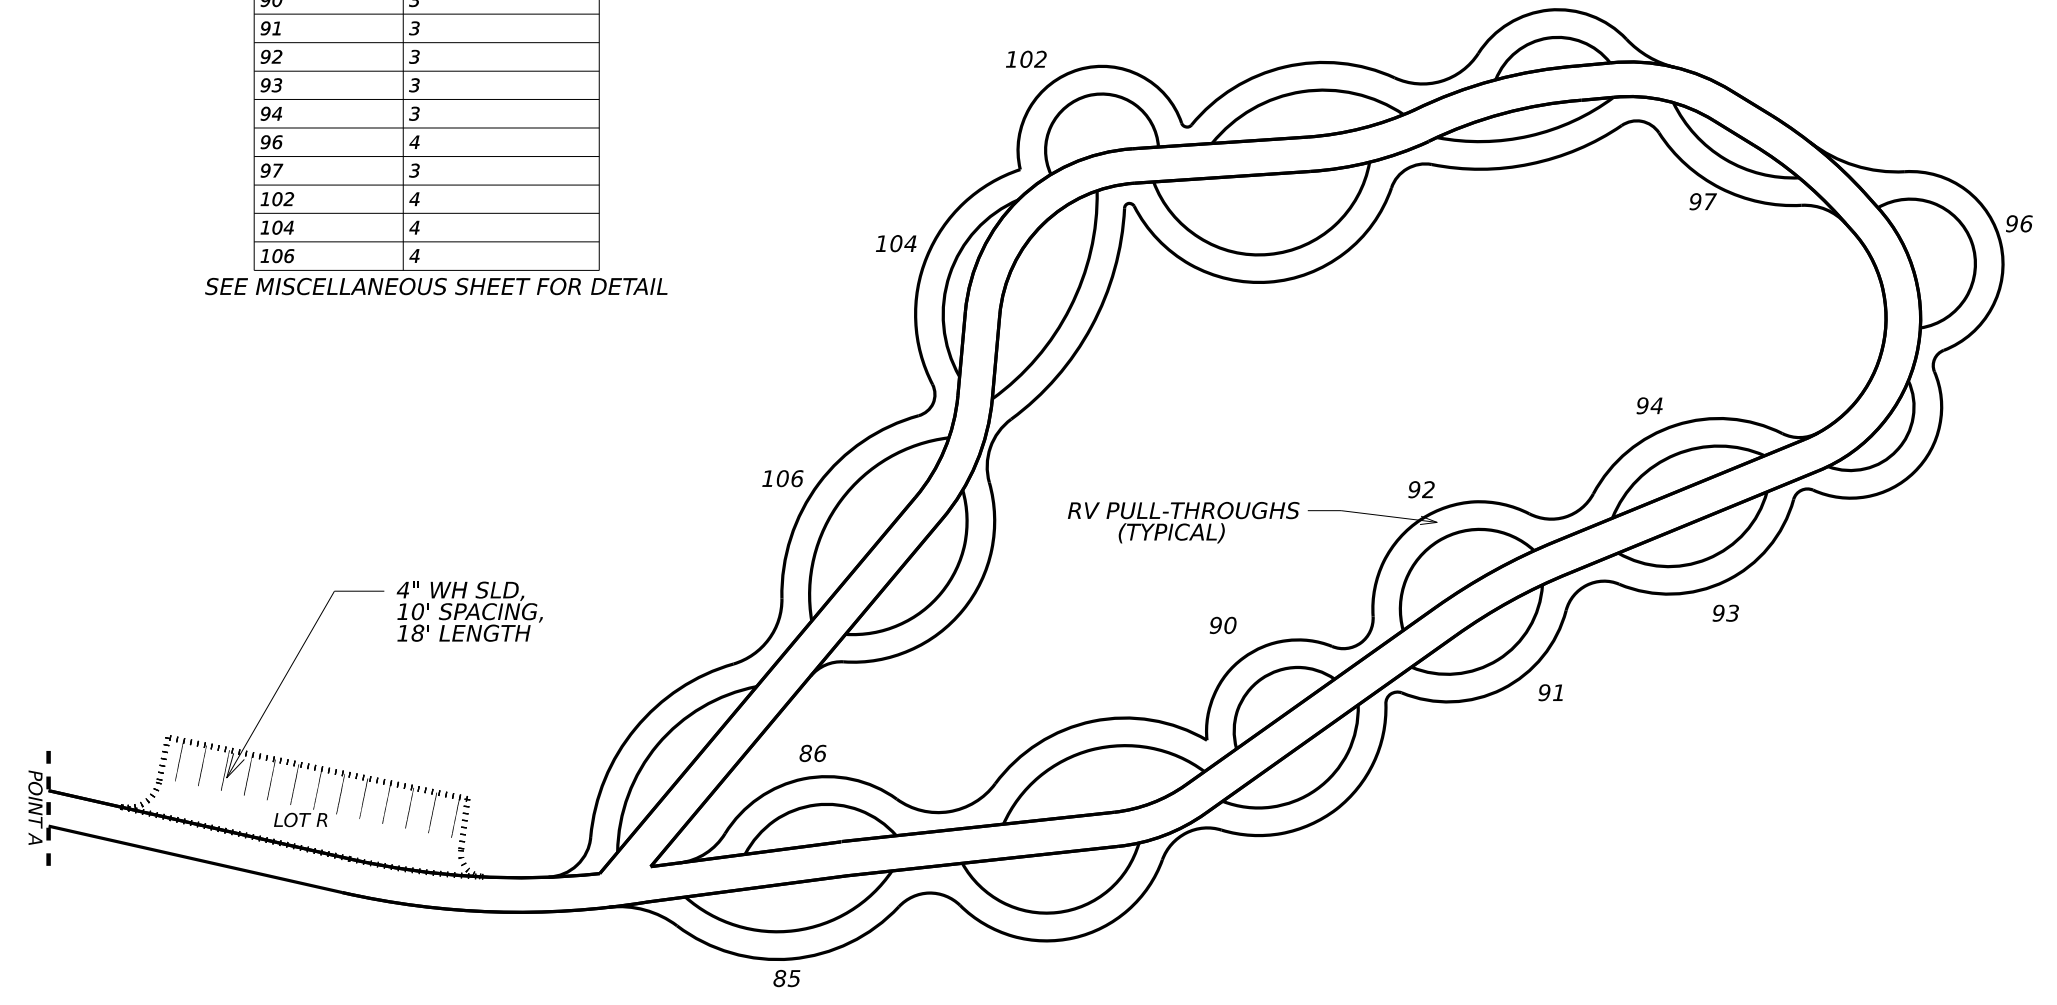

11.03.22

Monte R. Rater P.E.

0 50 100
SCALE IN FEET

**OVERLAY ONLY,
ALL AREAS
ON THIS SHEET**

Texas Department of Transportation


EISENHOWER STATE PARK
BOIS D'ARC RIDGE
PLAN LAYOUT

© 2023 SHEET 12 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	45	


DATE: 11/2/2022 7:56:35 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ_0901-19-176_etc\Submit\195% Plans\DGNS\045 PLAN LAYOUTS.dgn

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

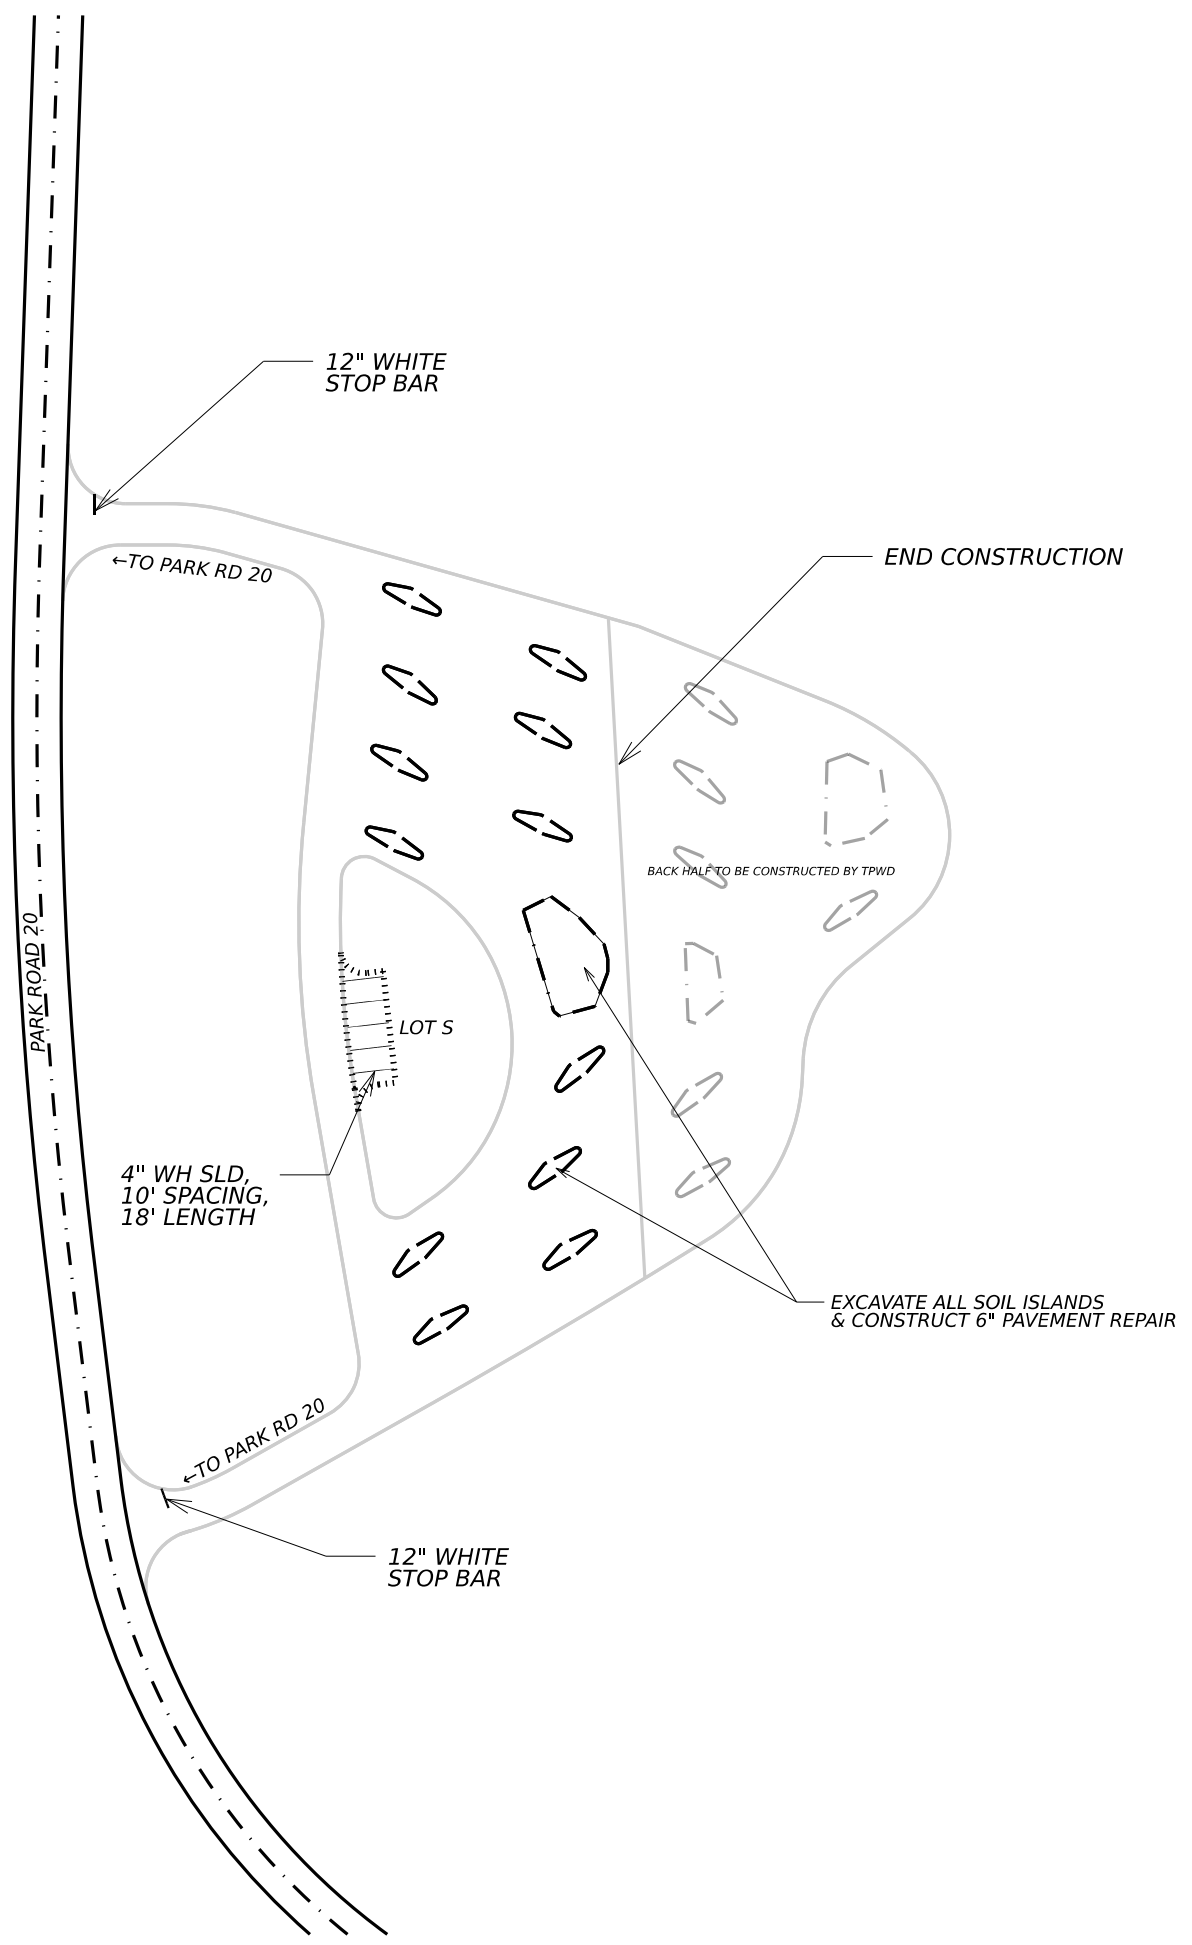

Monte R. Rater P.E.

11.03.22



EISENHOWER STATE
PARK
CEDAR HOLLOW
PLAN LAYOUT


© 2023 SHEET 13 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	46	

DATE: 11/2/2022 7:56:36 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176.etc\Submit\195% Plans\DGNS\046 PLAN LAYOUTS.dgn

DW: CK: CK: CK:

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

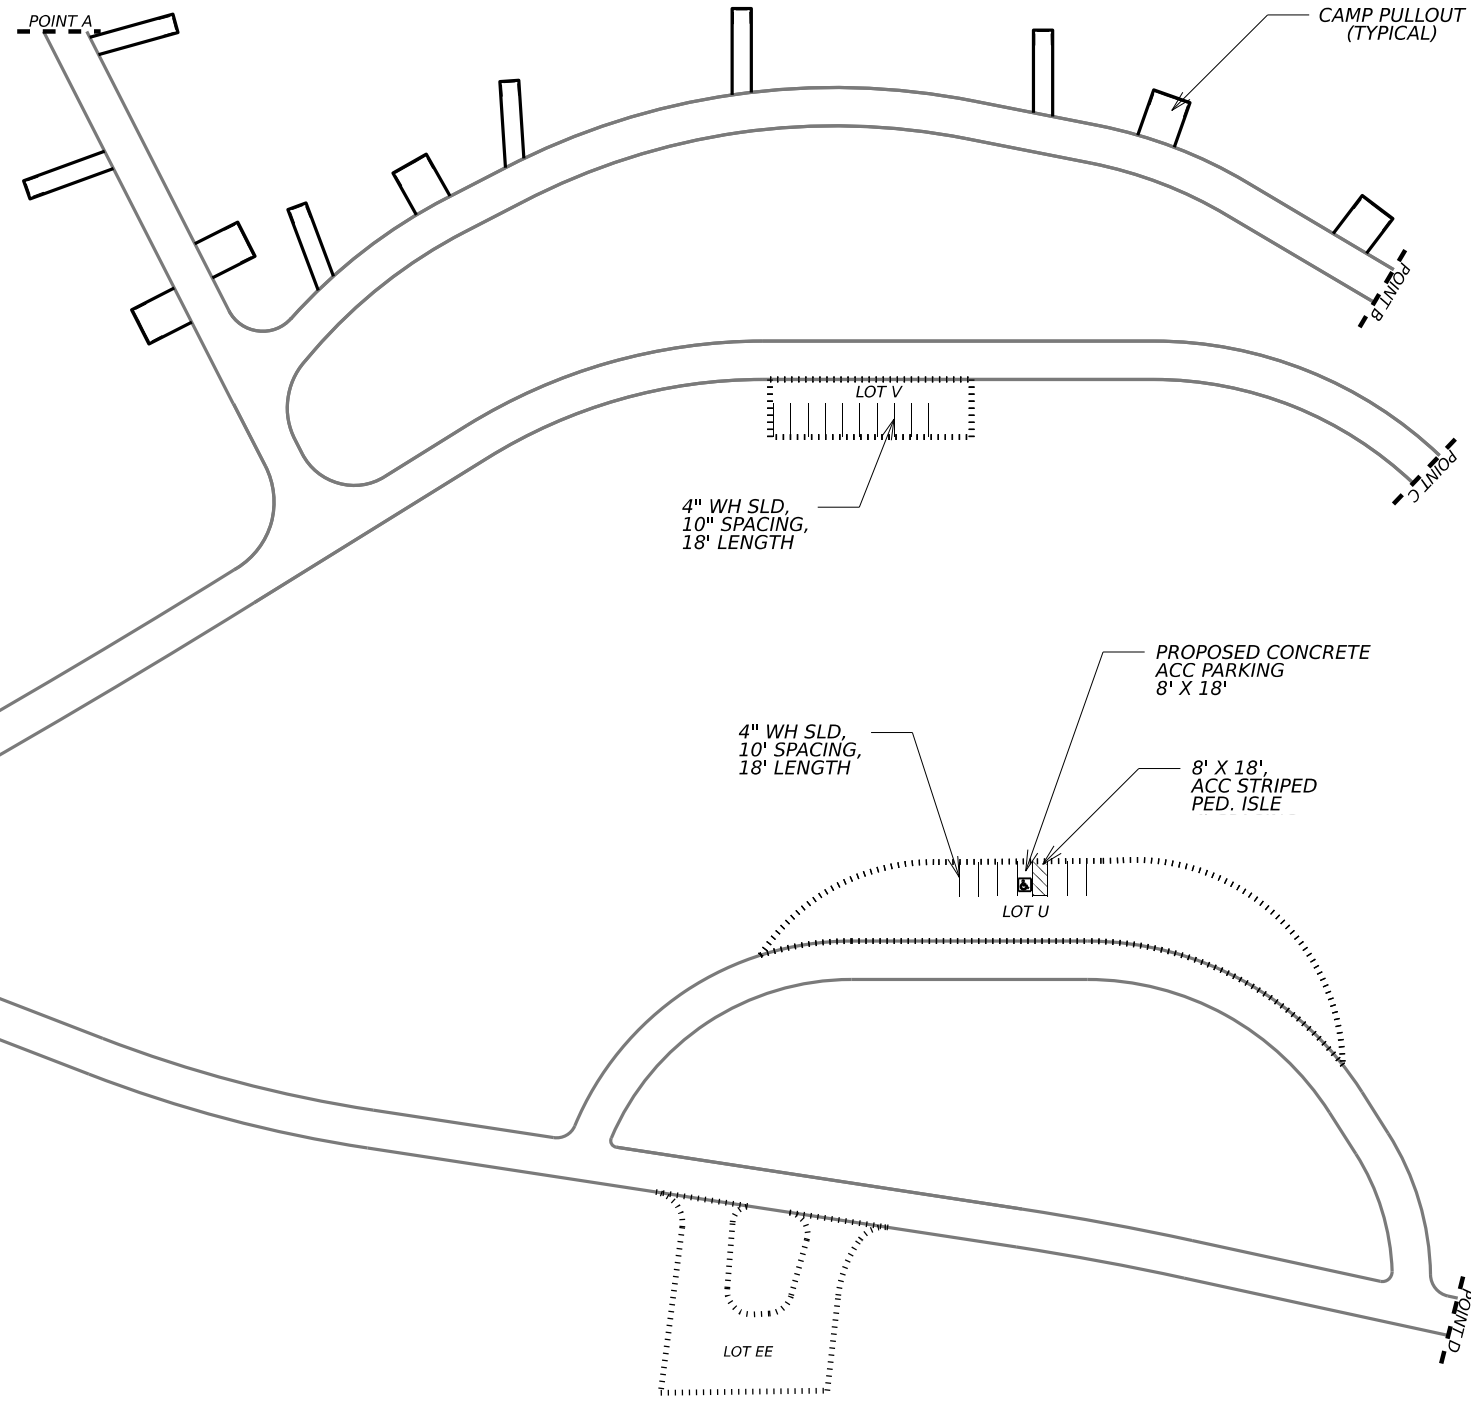

4" WH SLD,
10" SPACING,
18' LENGTH

LOT T

← TO PARK RD 20

12" WHITE
STOP BAR

4" WH SLD,
10" SPACING,
18' LENGTH

LOT V

4" WH SLD,
10" SPACING,
18' LENGTH

PROPOSED CONCRETE
ACC PARKING
8' X 18'

8' X 18'
ACC STRIPED
PED. ISLE


LOT U

LOT EE

CAMP PULLOUT
(TYPICAL)

Monte R. Rater P.E.

11.03.22



EISENHOWER STATE
PARK
DEER HAVEN & YACHT CLUB
PLAN LAYOUT

© 2023 SHEET 14 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	47	


DATE: 11/2/2022 7:56:37 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ\0901-19-176.etc\Submit\95% Plans\DGNS\047 PLAN LAYOUTS.dgn

DW: CK: CK: DW: CK: DW: CK:

CK: DW: CK: DW: CK: DW:


DATE: 11/2/2022 7:56:38 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CS\0901-19-176_etc\Submit\95% Plans\DGNS\048 PLAN LAYOUTS.dgn

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

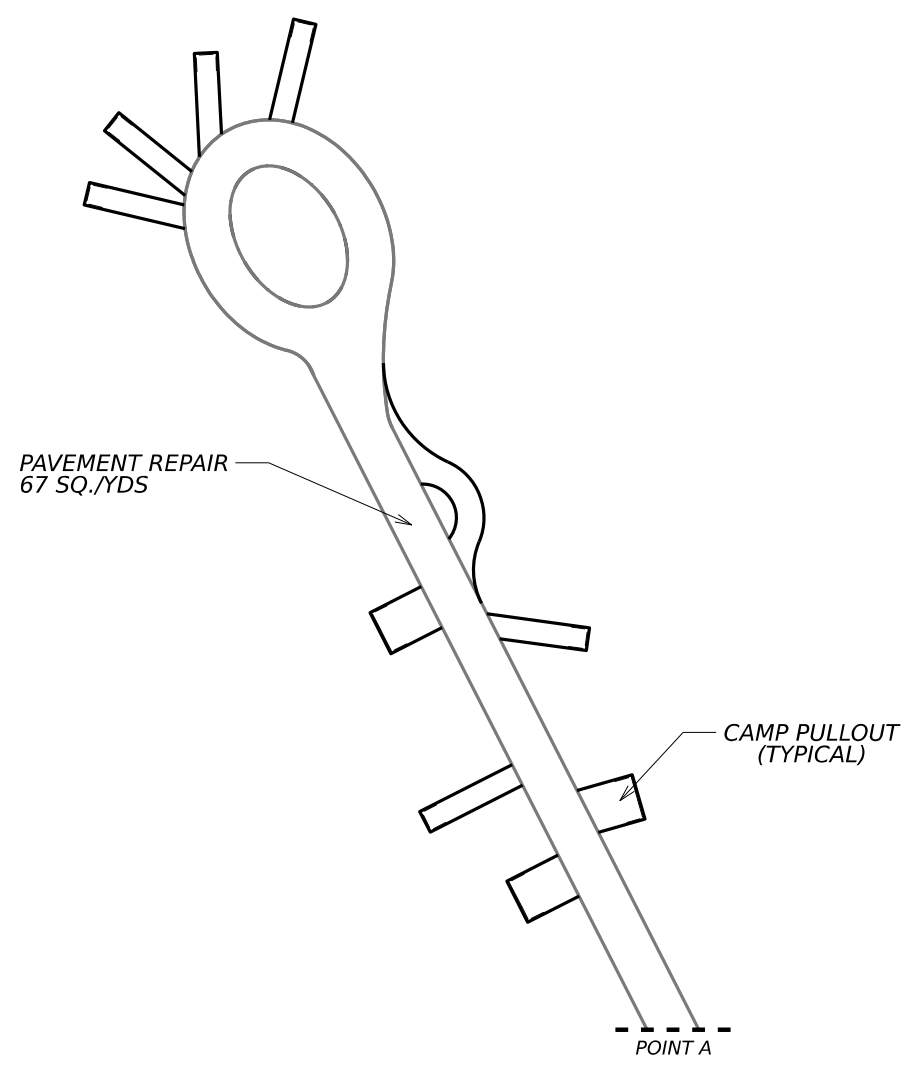

Monte R. Rater P.E.

11.03.22

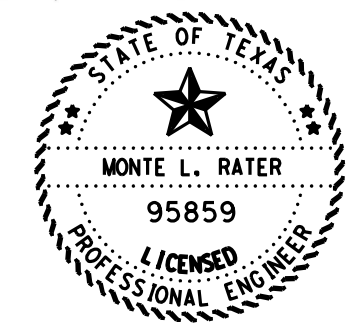


EISENHOWER STATE
PARK
DEER HAVEN & YACHT CLUB
PLAN LAYOUT

© 2023 SHEET 15 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	48	

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

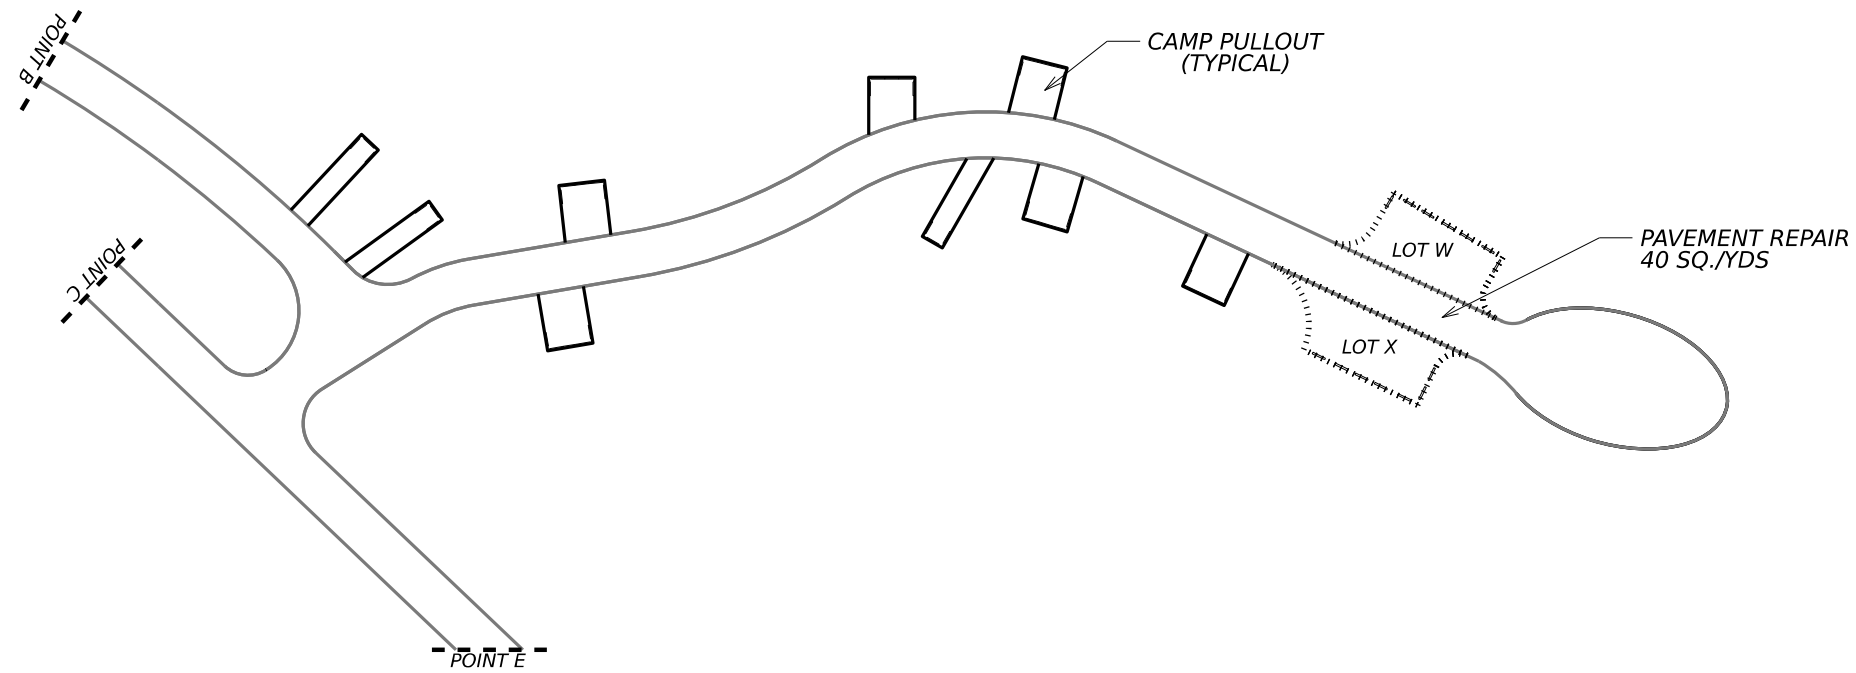

Monte R. Rater P.E.
11.03.22



EISENHOWER STATE
PARK
DEER HAVEN & YACHT CLUB
PLAN LAYOUT


© 2023 SHEET 16 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	49	

DATE: 11/2/2022 7:56:39 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ_0901-19-176_etc\Submit\95% Plans\DGNS\049 PLAN LAYOUTS.dgn


DN: CK: DW: CK:

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

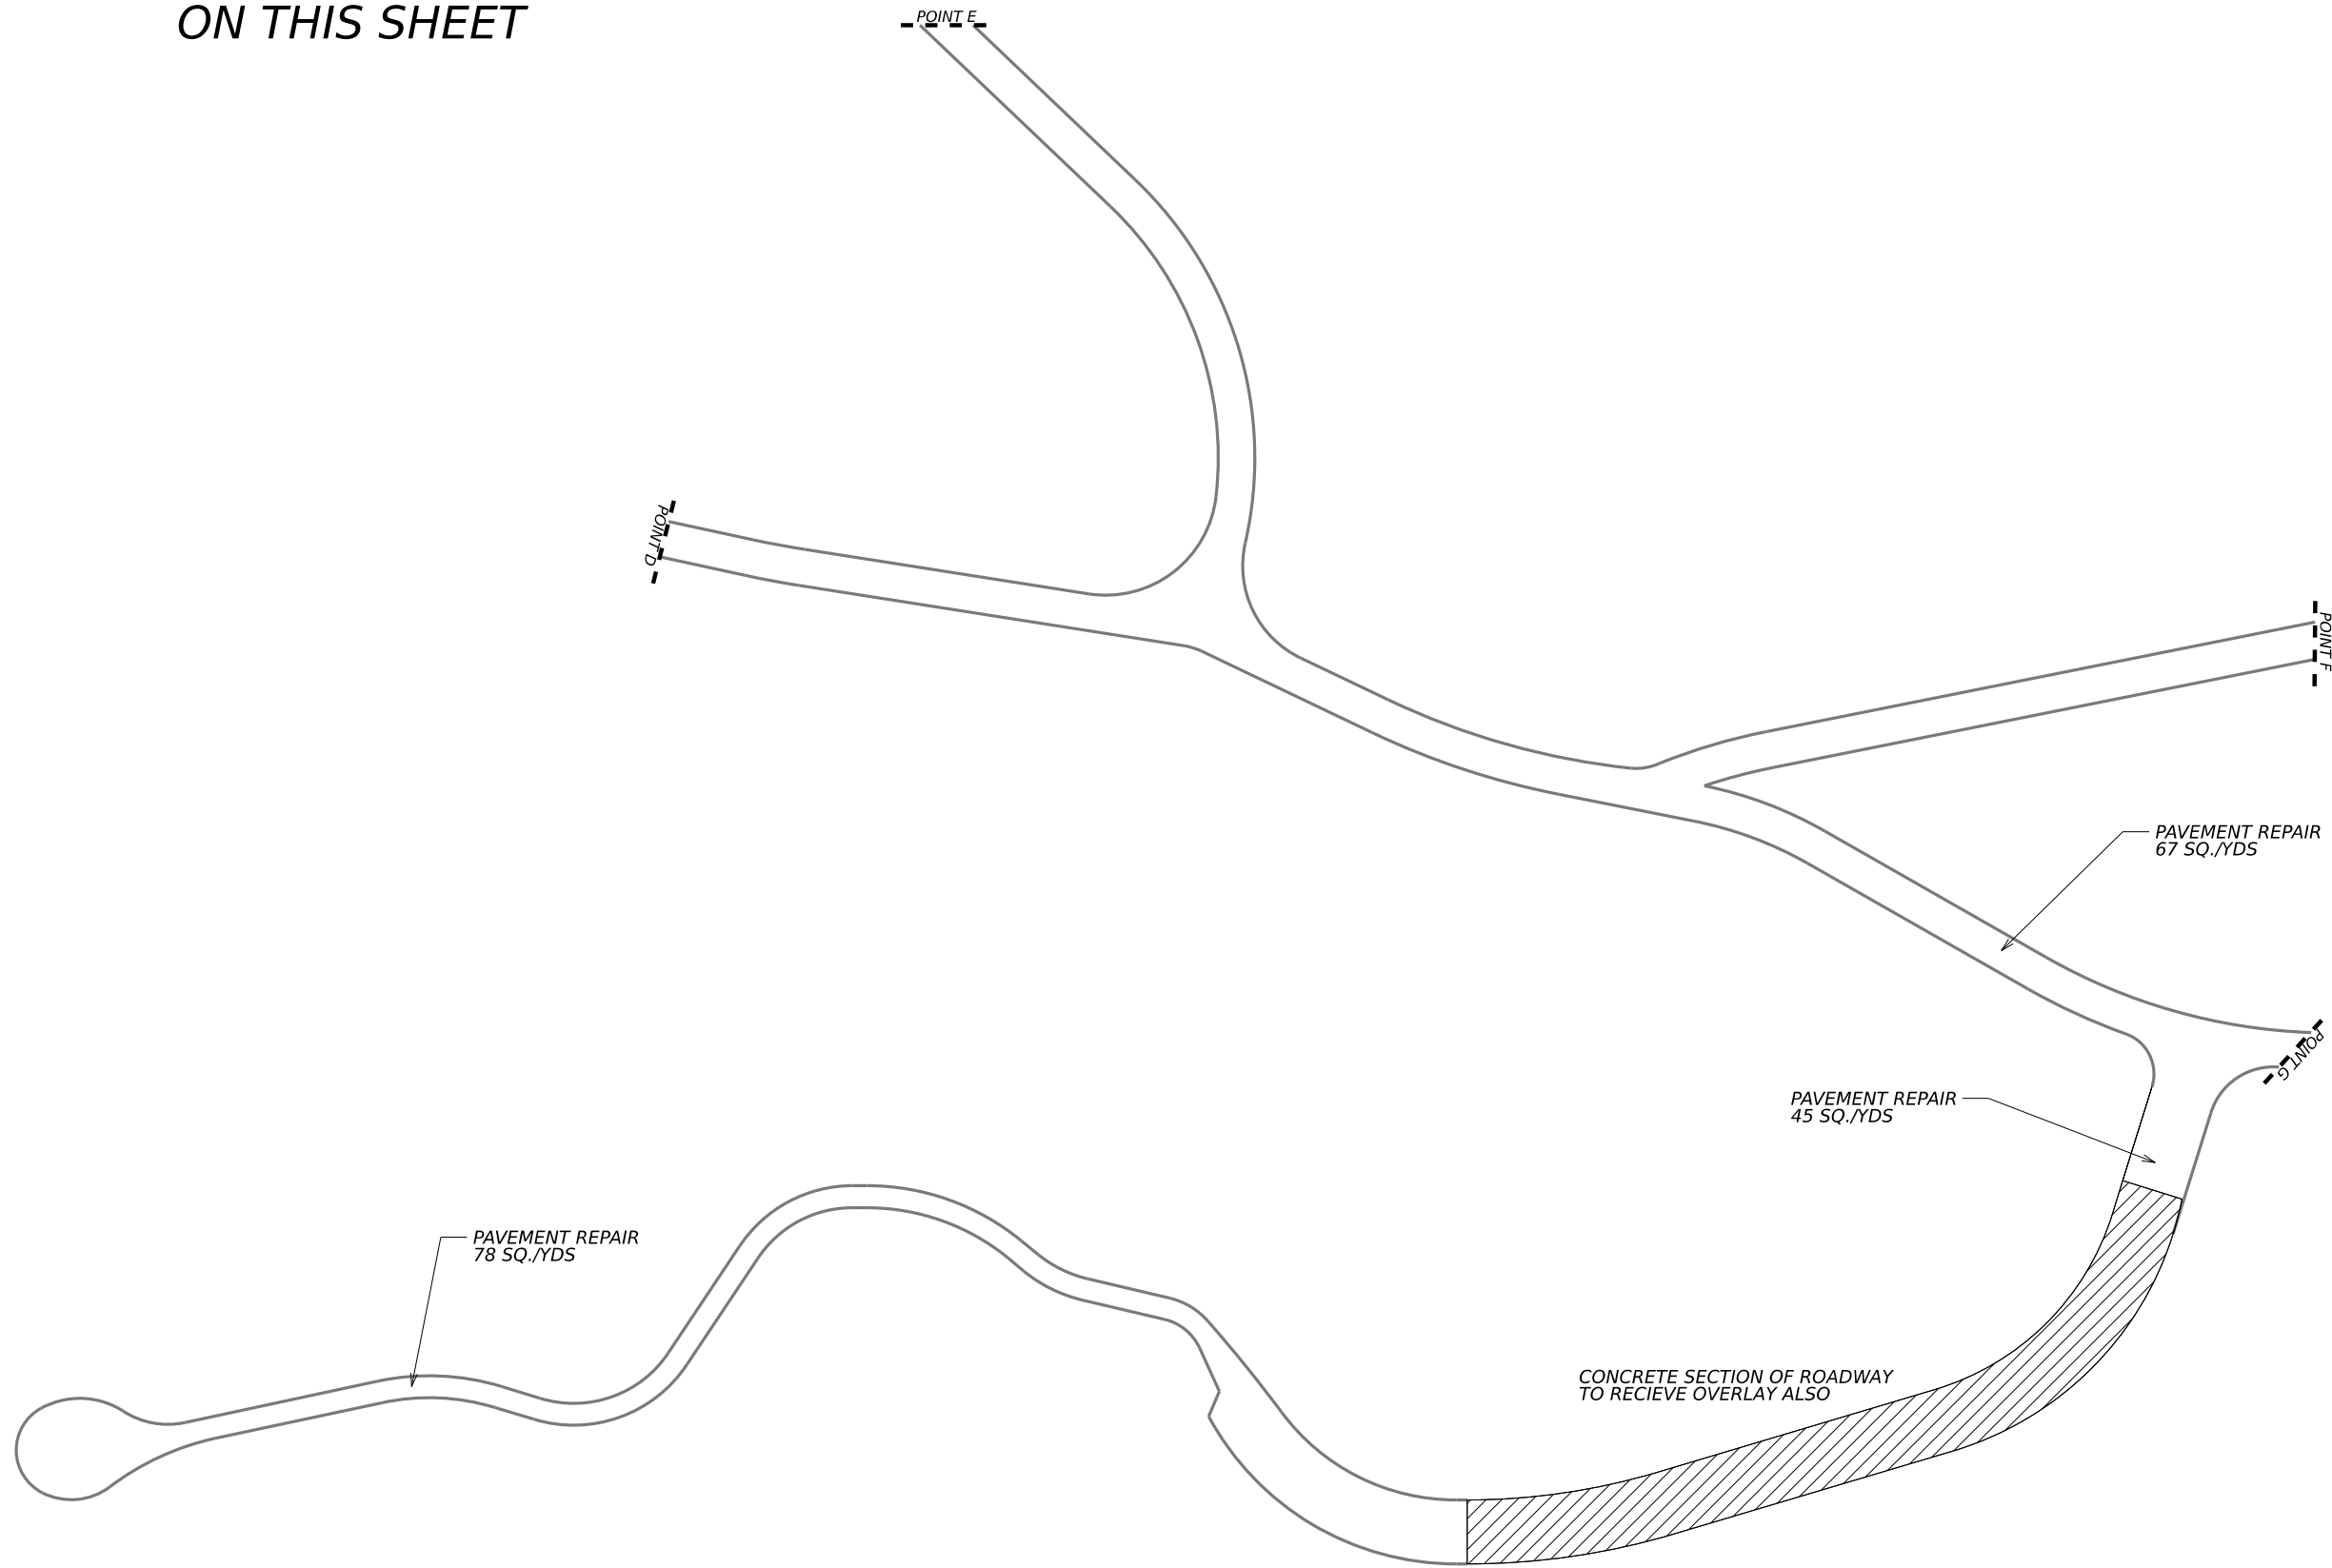

Monte R. Rater P.E.

11.03.22



EISENHOWER STATE
PARK
DEER HAVEN & YACHT CLUB
PLAN LAYOUT


© 2023 SHEET 17 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	50	

DATE: 11/2/2022 7:56:40 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab projects CS\0901-19-176. etc\Submit\95% Plans\DGNS\050 PLAN LAYOUTS.dgn


CK: DW: CK: DW: CK: DW: CK: DW:

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

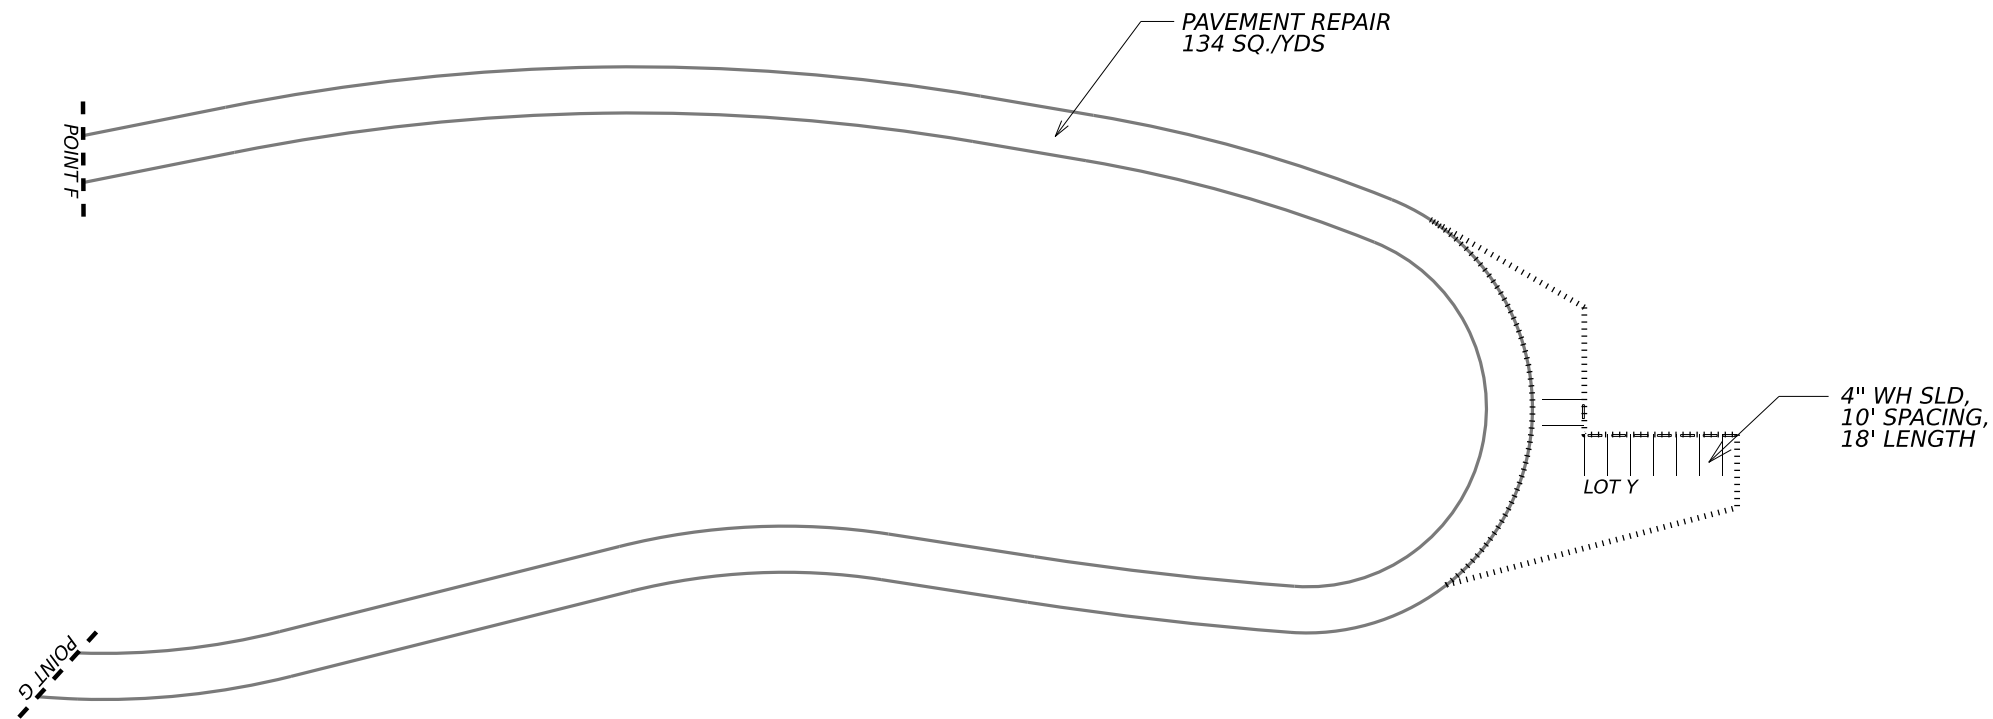

Monte R. Rater P.E.

11.03.22



EISENHOWER STATE
PARK
DEER HAVEN & YACHT CLUB
PLAN LAYOUT

© 2023 SHEET 18 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	51	


DATE: 11/2/2022 7:56:41 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ\0901-19-176_etc\Submit\95% Plans\DGNS\051 PLAN LAYOUTS.dgn

DN: CK: DW: CK: CK:


OVERLAY ONLY,
ALL AREAS
ON THIS SHEET



DATE: 11/2/2022 7:56:42 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CSJ_0901-19-176_etc\Submittal\95% Plans\DGNS\052 PLAN LAYOUTS.dgn

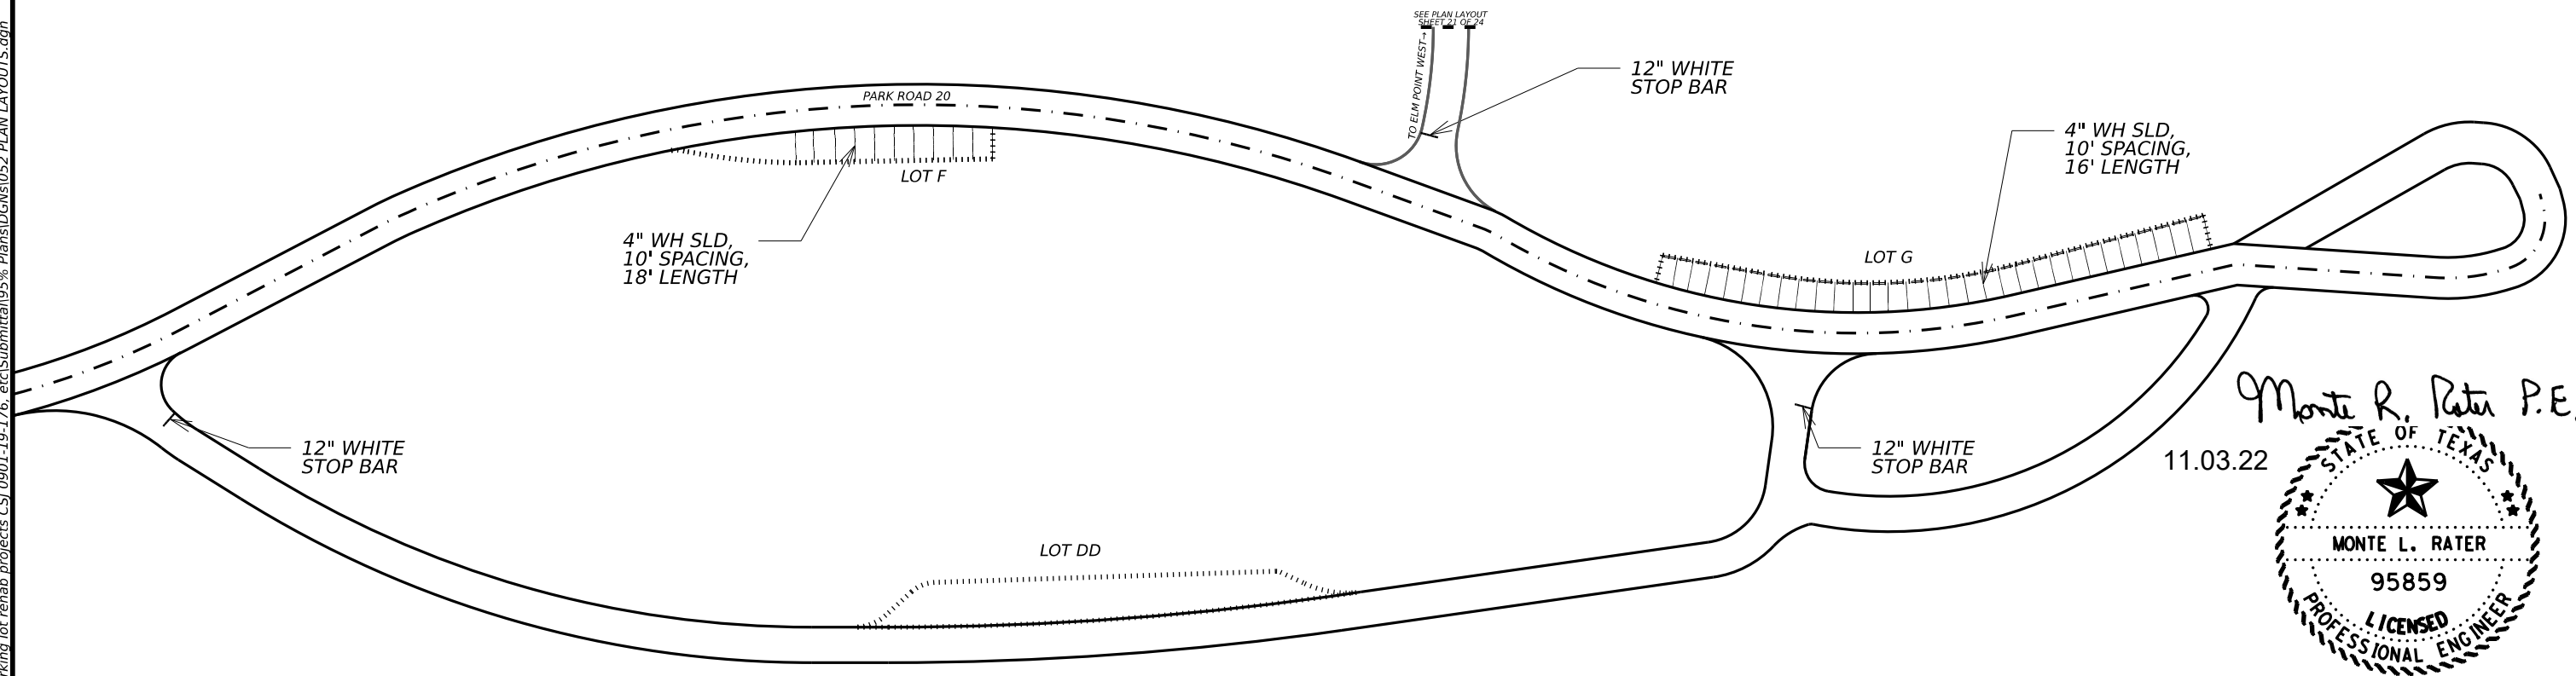

Monte R. Rater P.E.
11.03.22



EISENHOWER STATE
PARK
ELM POINT EAST
PLAN LAYOUT

© 2023 SHEET 19 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST		COUNTY	SHEET NO.
PAR		GRAYSON	52

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET



POINT A

PAVEMENT REPAIR
167 SQ./ YDS

VEHICLE PULL OUT

12" WHITE
STOP BAR

12" WHITE
STOP BAR

TO PARK RD 20

PARK ROAD 20

TO ELM POINT EAST

Monte R. Rater P.E.

11.03.22

SCALE IN FEET

EISENHOWER STATE
PARK

ELM POINT WEST
& OVERFLOW PARKING
PLAN LAYOUT


© 2023 SHEET 20 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	53	

DATE: 11/2/2022 7:56:43 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176.etc\Submit\95% Plans\DGNS\053 PLAN LAYOUTS.dgn


CK: DW: CK: DW:

OVERLAY ONLY,
ALL AREAS
ON THIS SHEET

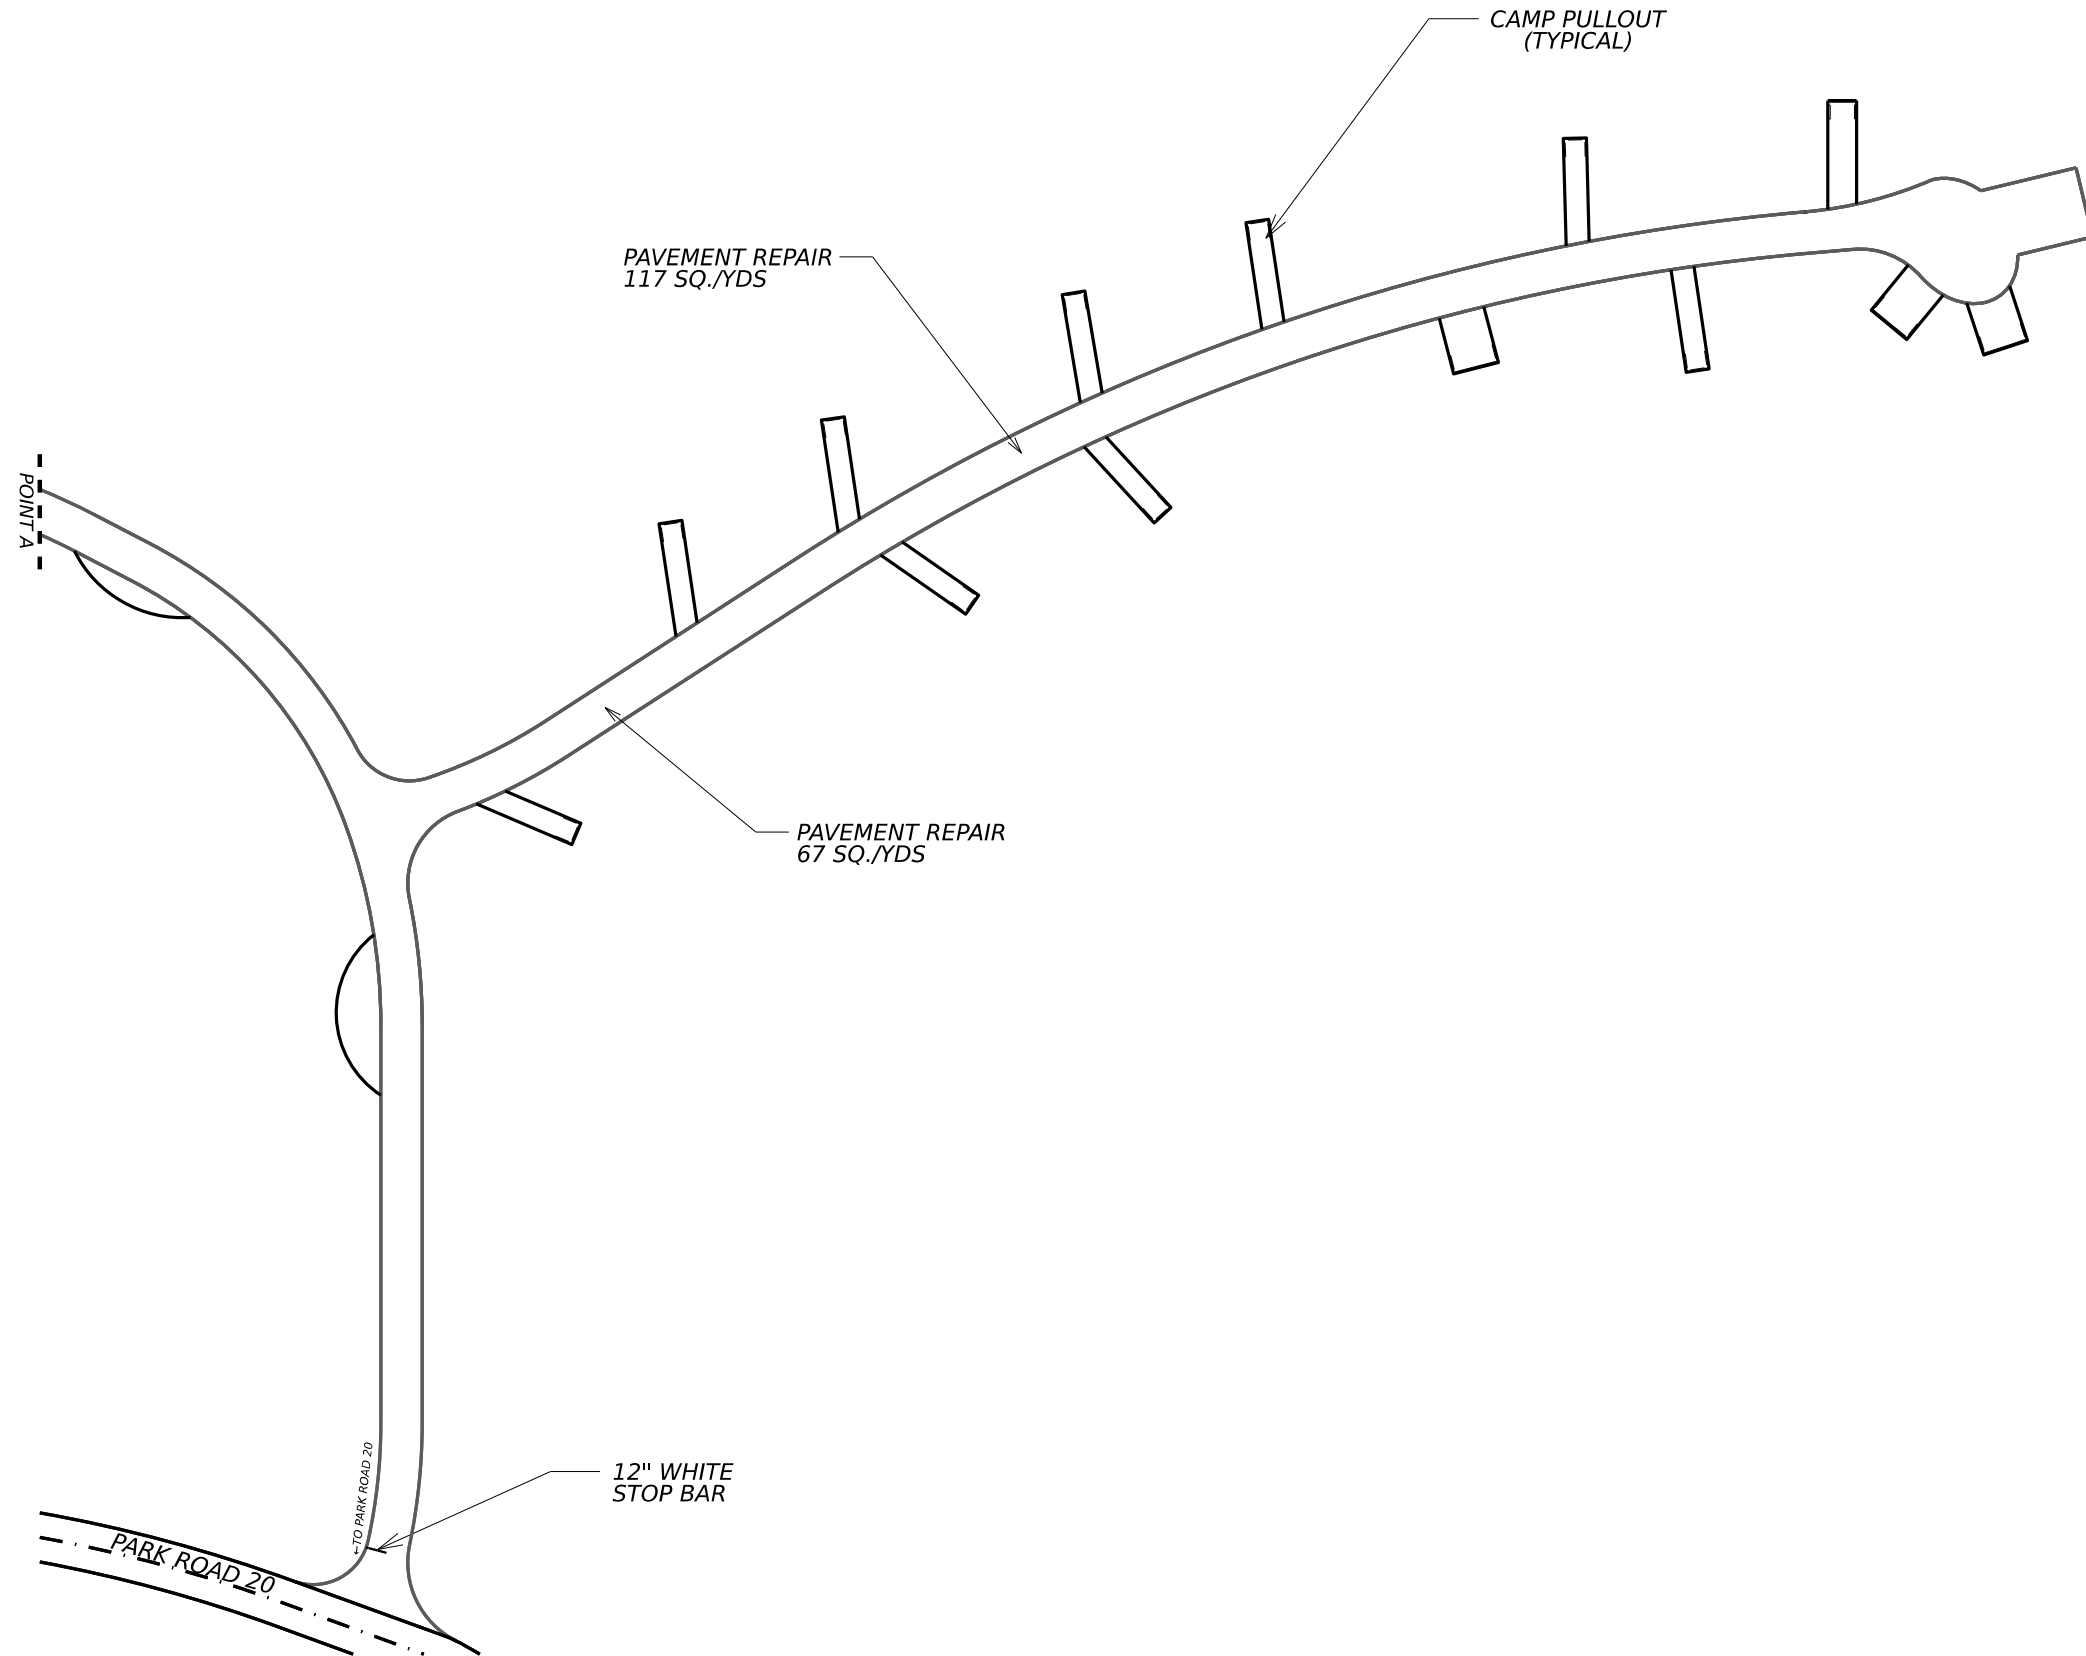

Monte R. Rater P.E.

11.03.22



Texas Department of Transportation

EISENHOWER STATE PARK

ELM POINT WEST & OVERFLOW PARKING PLAN LAYOUT


© 2023 SHEET 21 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	54	

DATE: 11/2/2022 7:56:44 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176_et\Submit\95% Plans\DGNS\054 PLAN LAYOUTS.dgn


CK: DW: CK: DW:

CK:
DW:
CK:
DW:

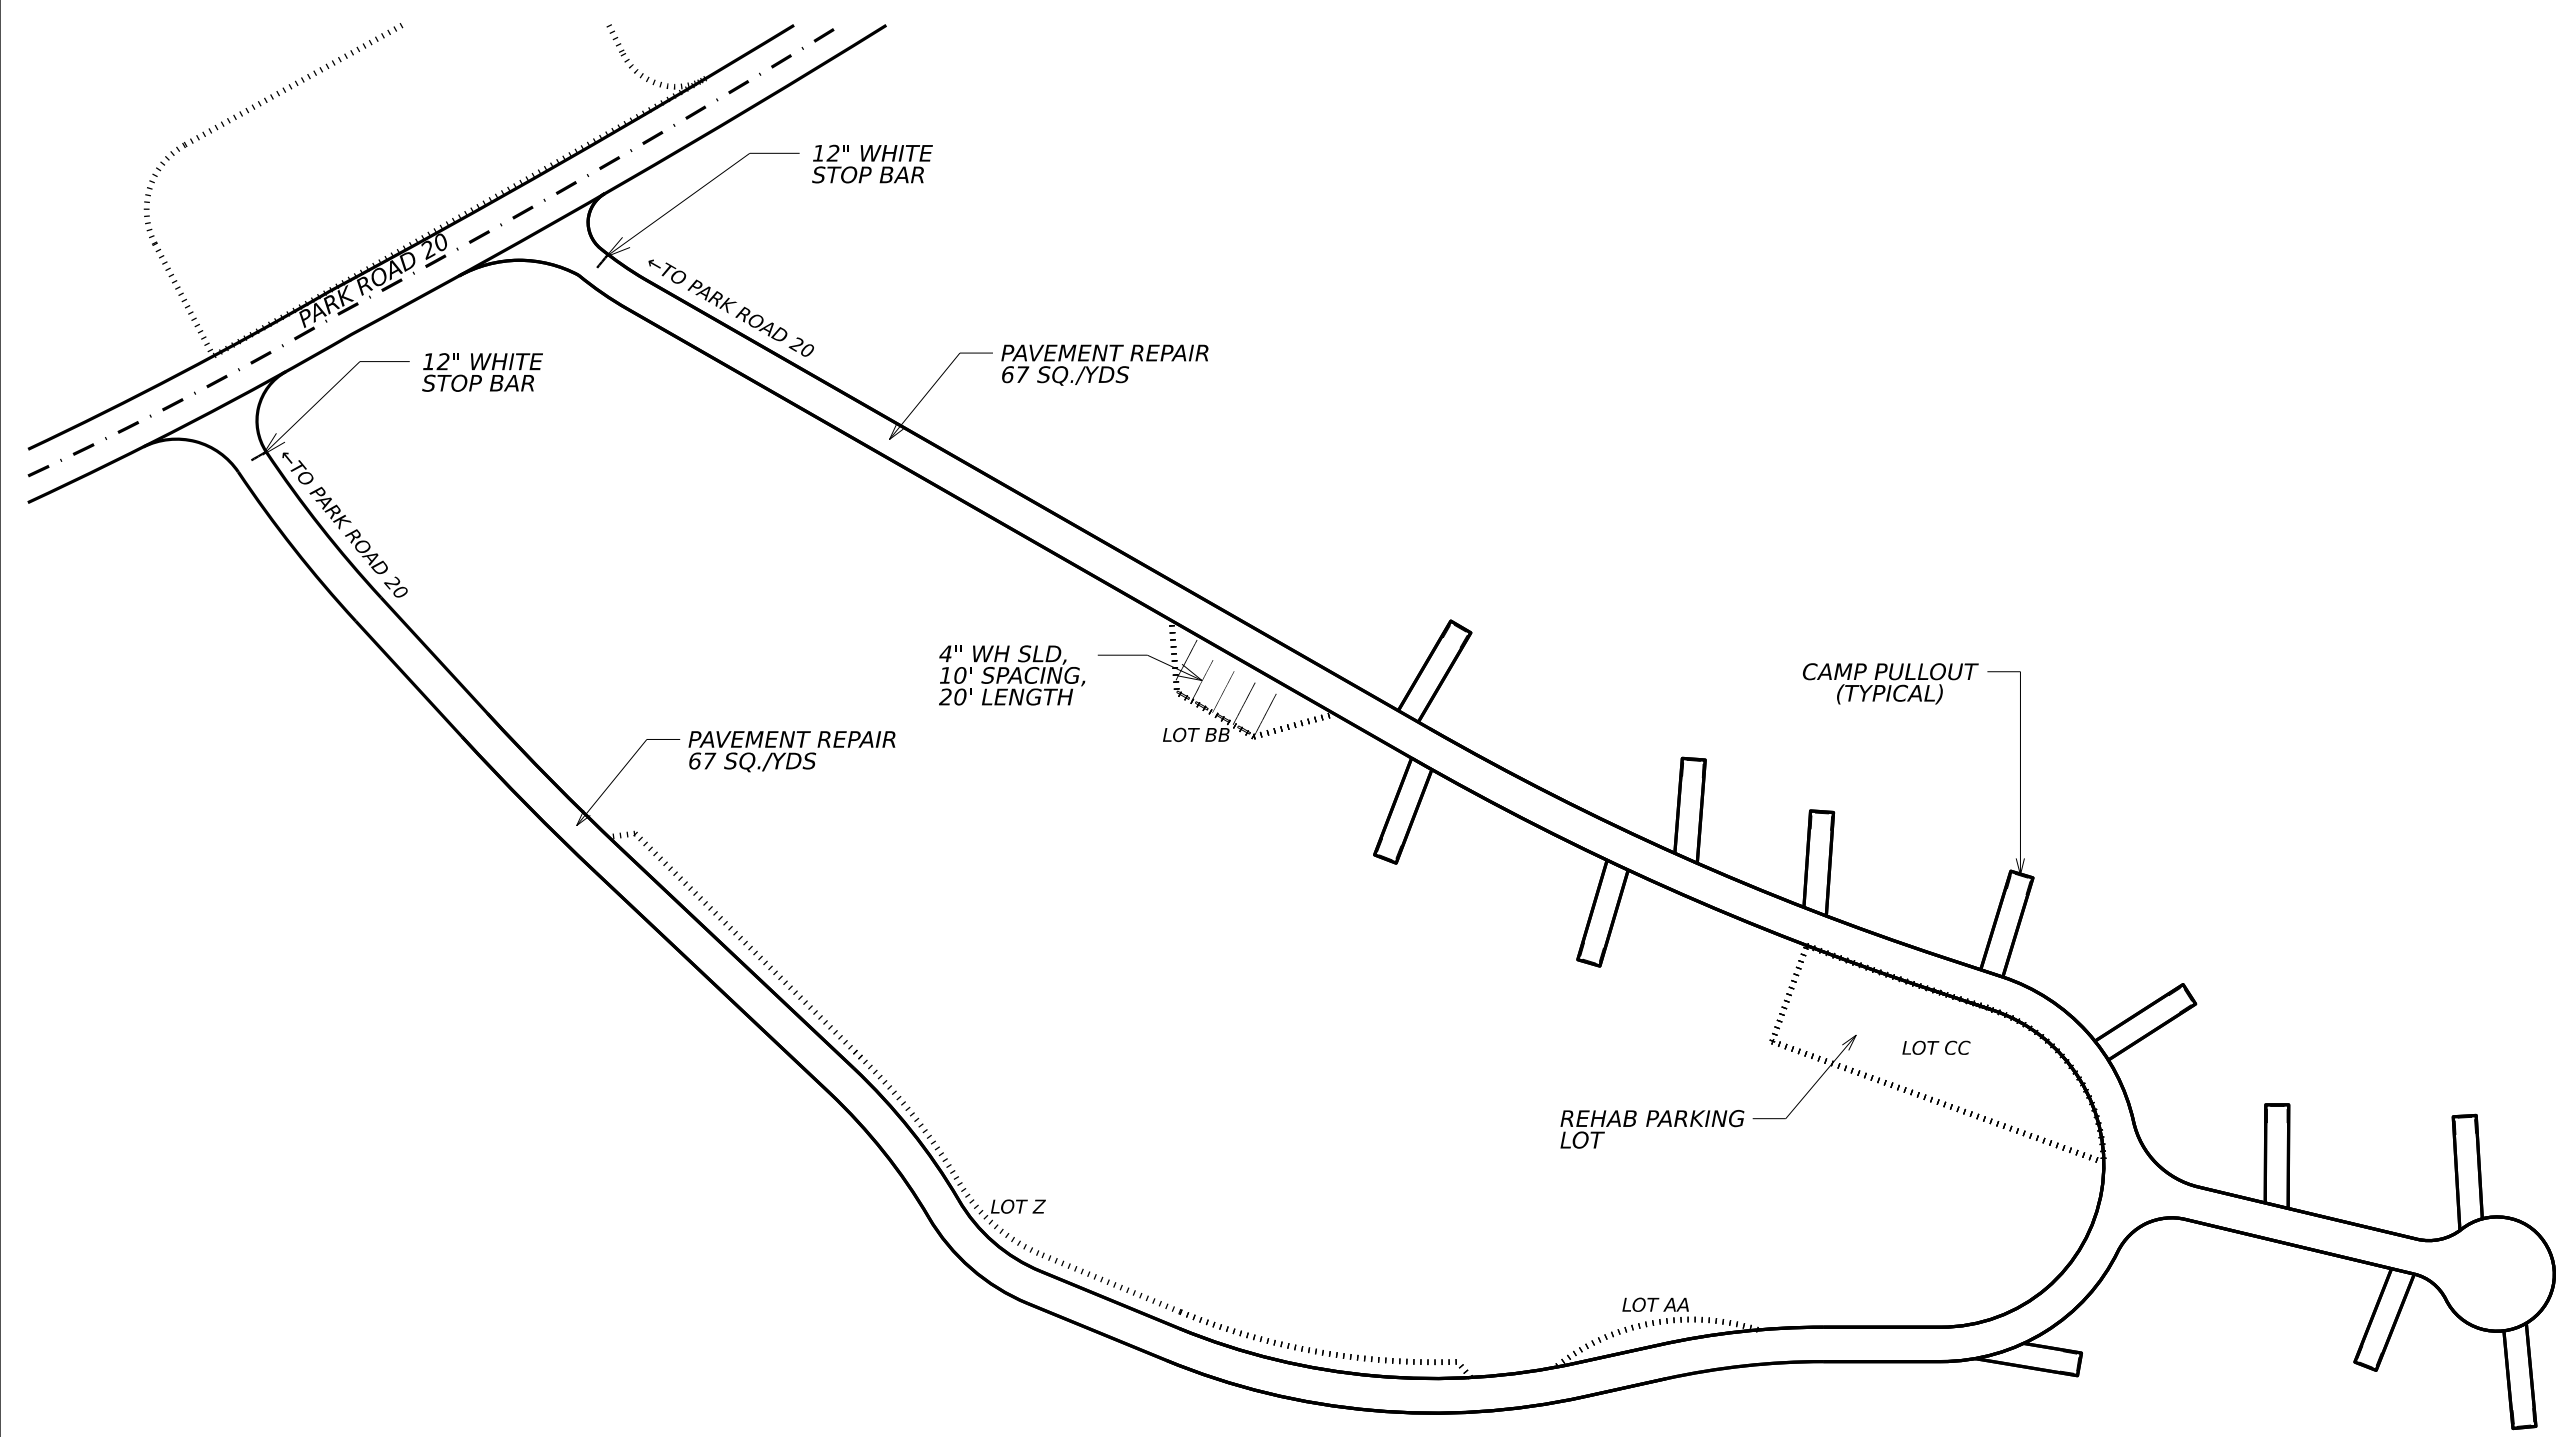

Monte R. Rater P.E.

11.03.22



OVERLAY ONLY, ALL AREAS ON THIS SHEET EXCEPT WERE REHAB WORK IS INDICATED



EISENHOWER STATE PARK


FOSSIL RIDGE PLAN LAYOUT

© 2023 SHEET 22 OF 24


CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	55	

DATE: 11/2/2022 8:04:30 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176_et\Submit\95% Plans\DGNS\055 PLAN LAYOUTS.dgn

REHAB ONLY, ALL
AREAS ON THIS SHEET

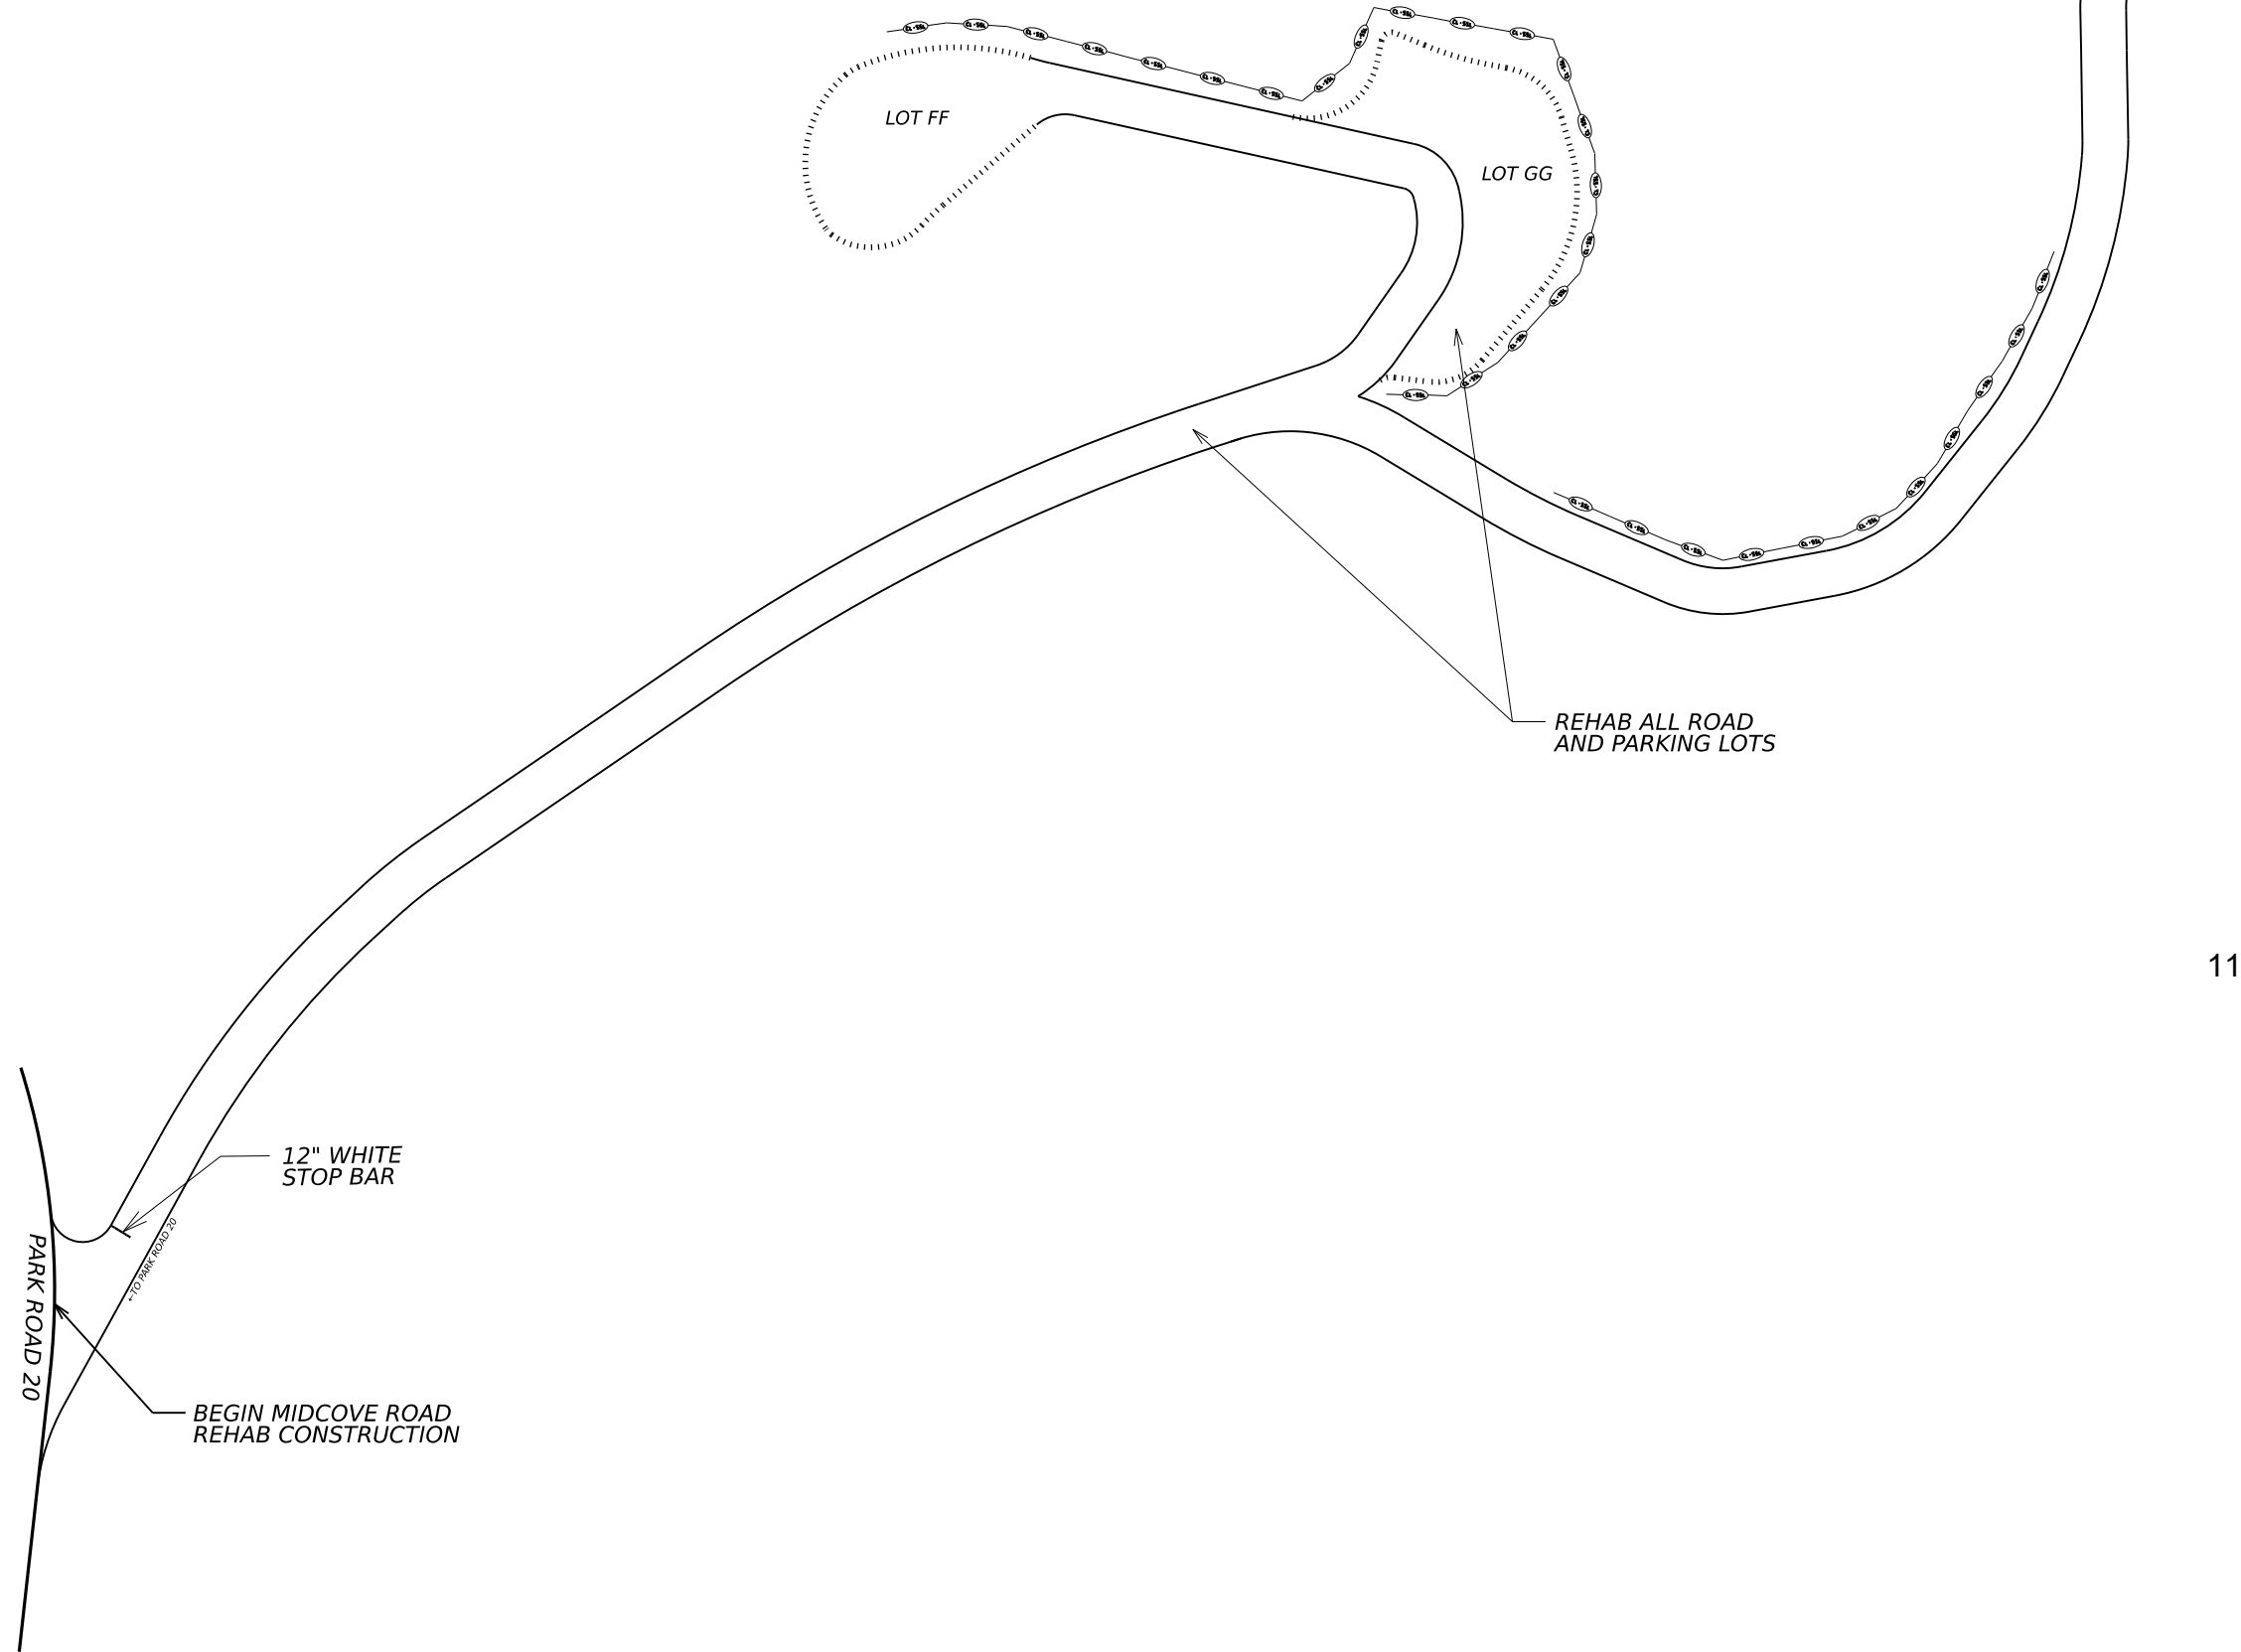

Monte R. Rater P.E.
11.03.22

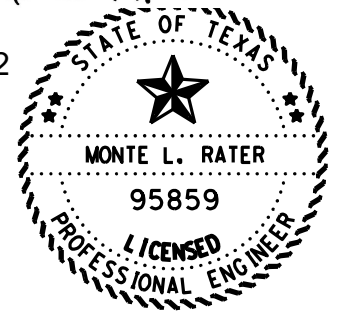

EISENHOWER STATE
PARK
MIDCOVE ROAD
PLAN LAYOUT



©2023 SHEET 23 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	56	

DATE: 11/2/2022 7:56:46 PM
FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176.etc\Submit\95% Plans\DGNS\056 PLAN LAYOUTS.dgn

DW: CK: CK: DW: CK: DW: CK:

REHAB ONLY, ALL AREAS ON THIS SHEET

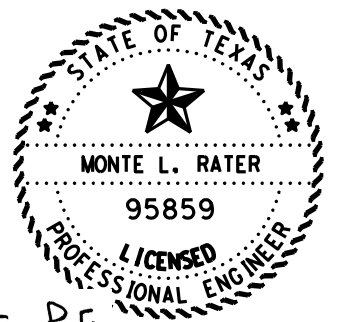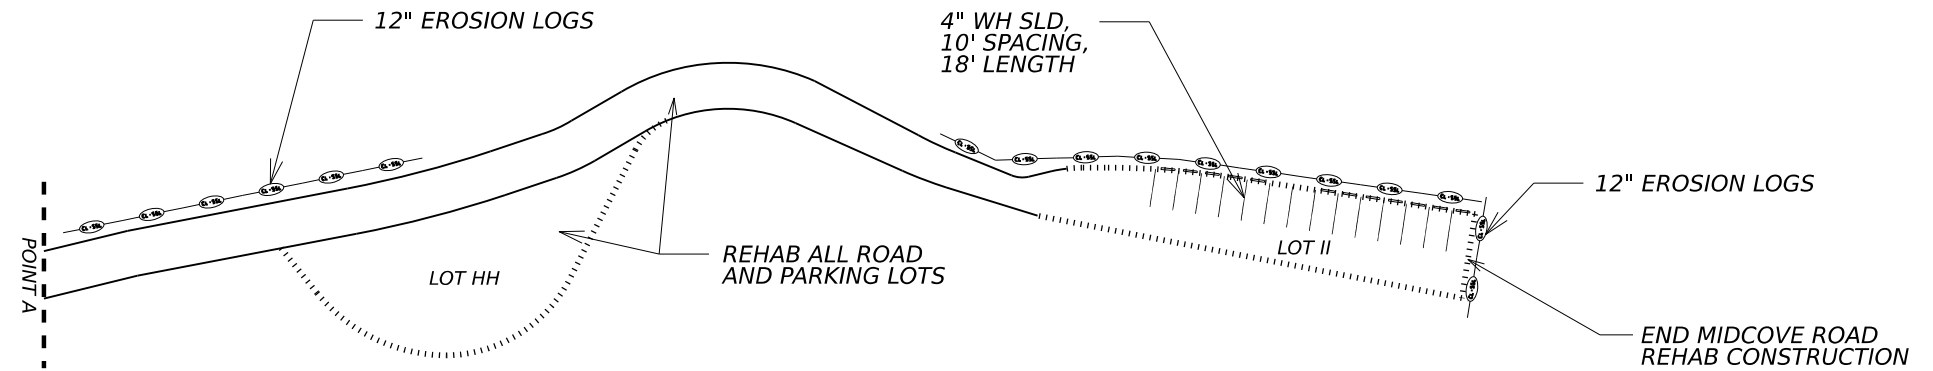

11.03.22

Monte R. Rater P.E.



EISENHOWER STATE PARK

MIDCOVE ROAD
PLAN LAYOUT

© 2023


SHEET 24 OF 24

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	57	

DATE: 11/2/2022 7:56:47 PM
 FILE: C:\Users\SWALKER7\OneDrive\Desktop\Projects\Eisenhower\TPWD parking lot rehab\projects\CS\0901-19-176_etc\Submit\195% Plans\DGNS\057 PLAN LAYOUTS.dgn


DW: CK: CK: CK:

CK:
DW:
CK:
DW:

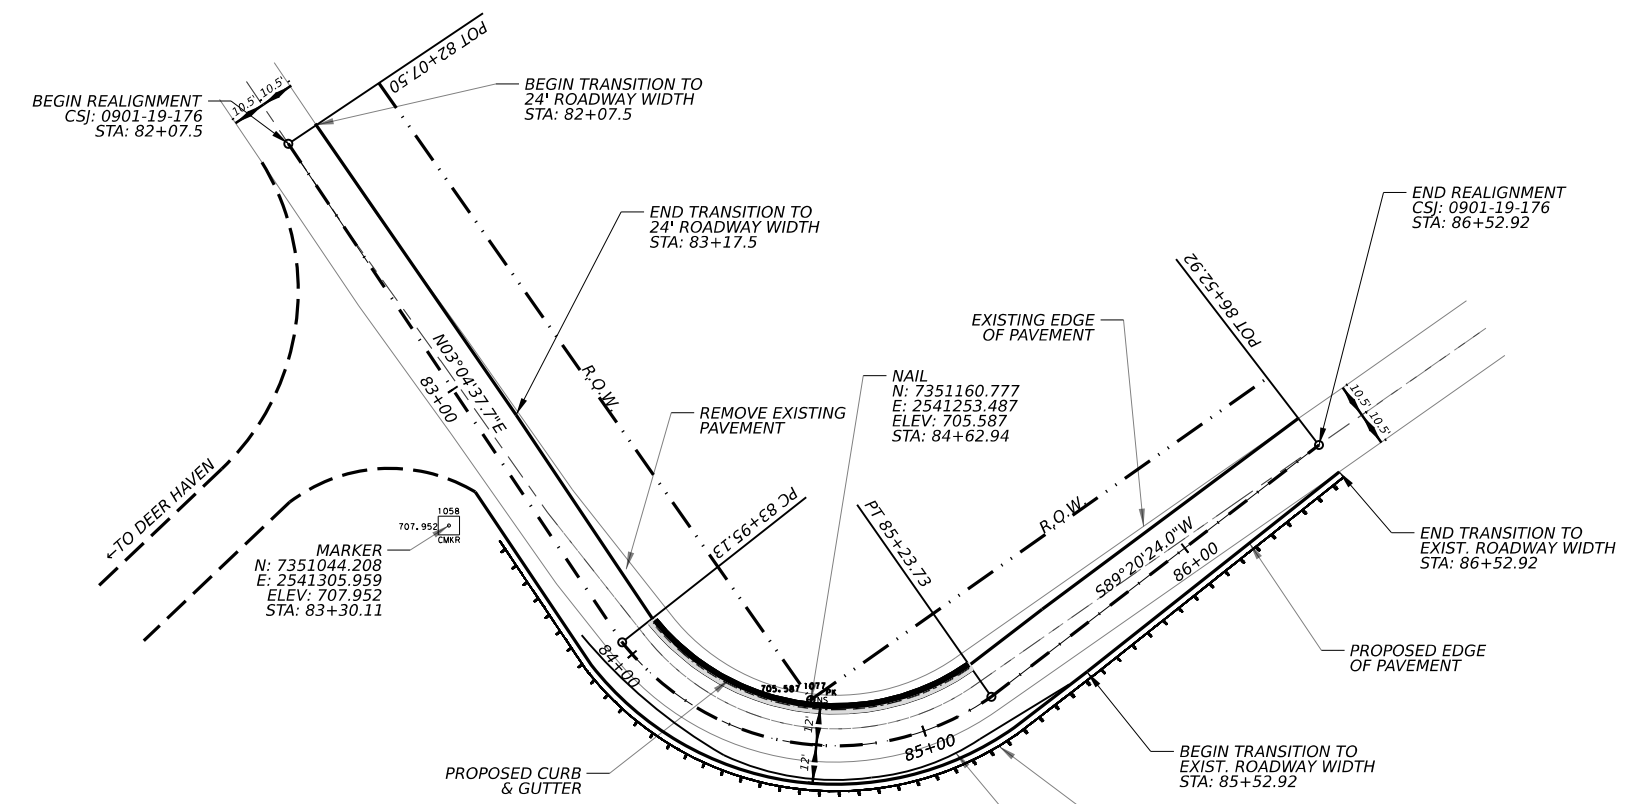

PI 84+75.35
 Δ 86°41'19.6" (LT)
 D 67°24'24.5"
 T 80.22'
 L 128.61'
 R 85.00'
 PC 83+95.13
 PT 85+23.73

POWER POLE
 N: 7351207.444
 E: 2541255.914
 ELEV: 704.098
 STA: 84+85.93

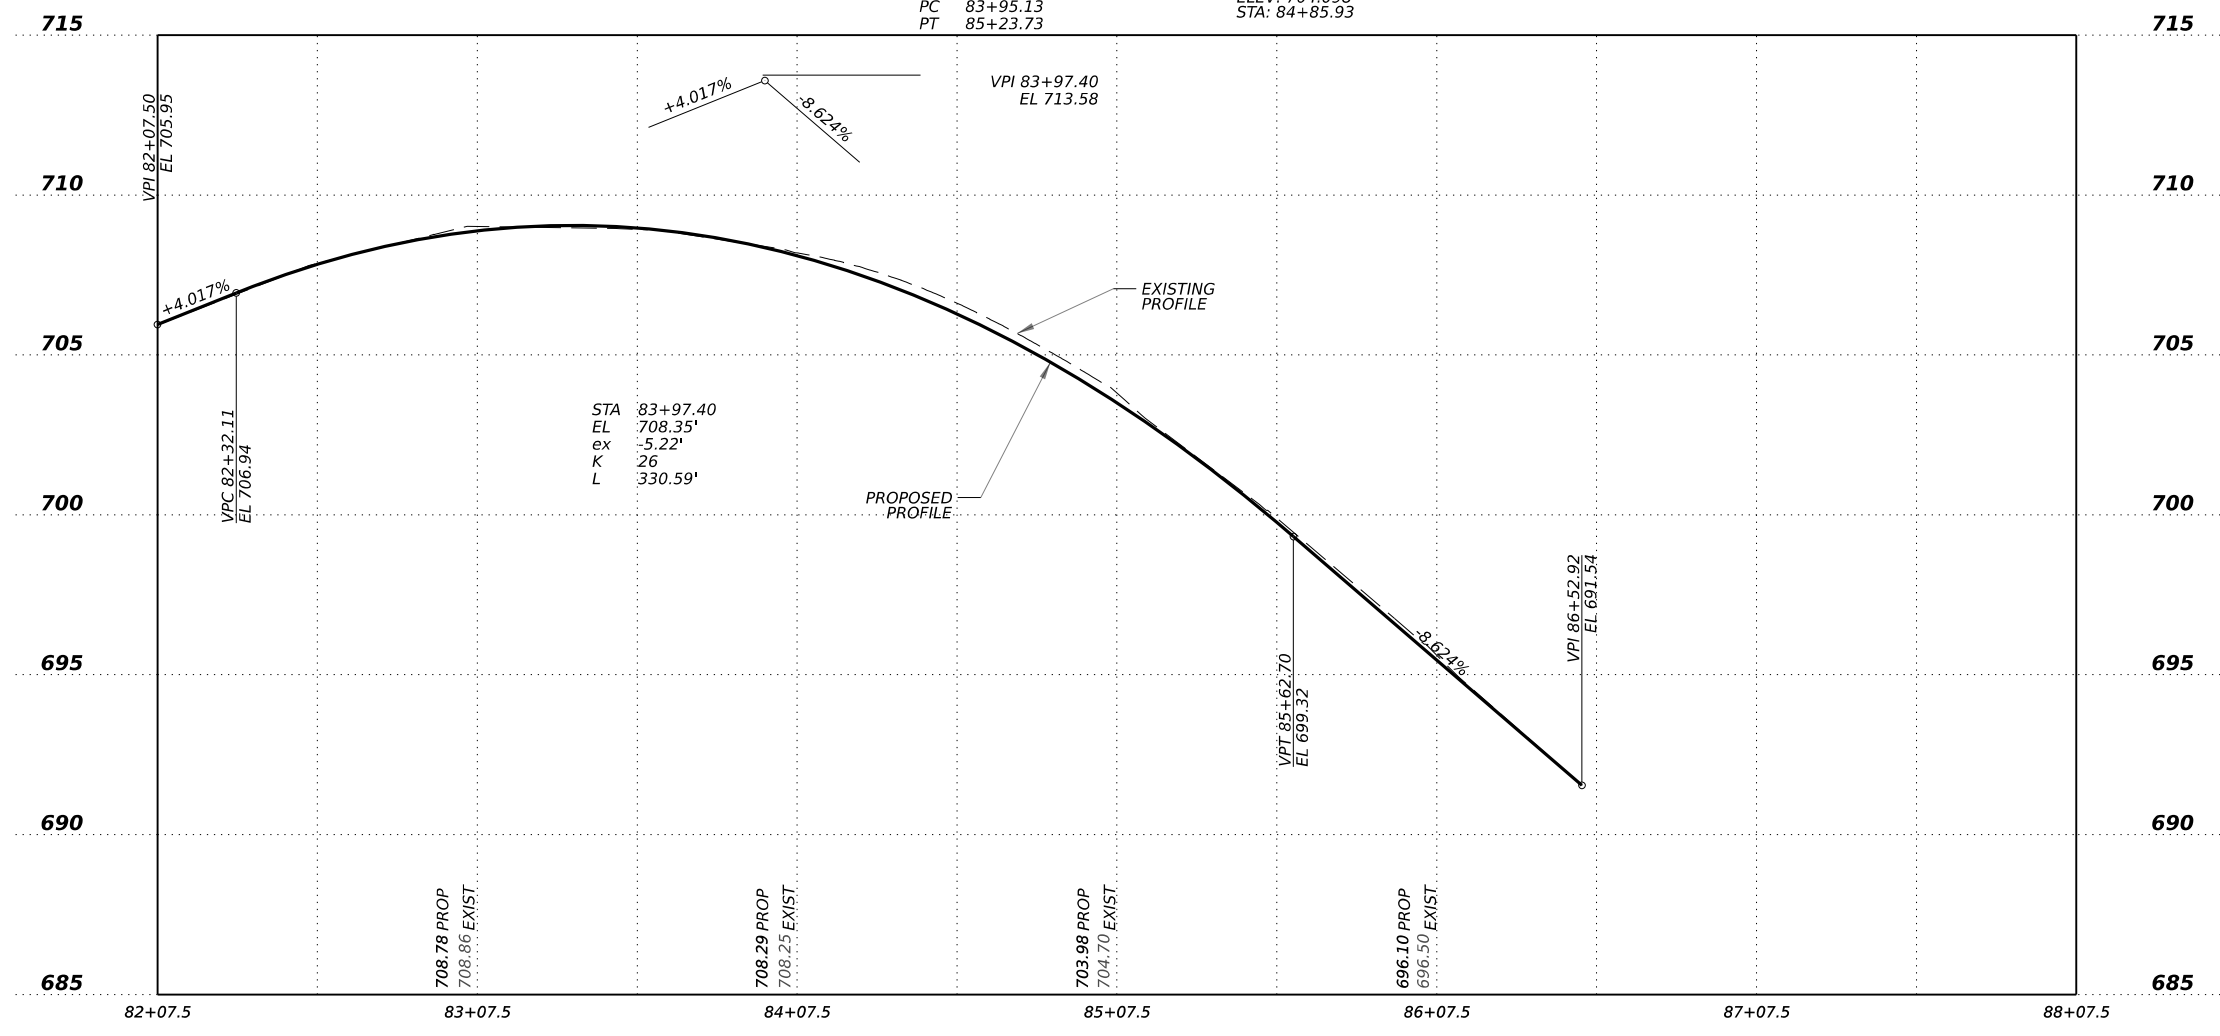

11.03.22

Monte R. Rater P.E.

SCALE IN FEET



EISENHOWER STATE PARK
 PR 20 REALIGNMENT
 PLAN & PROFILE

© 2023 SHEET 1 OF 1



CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	58	

DATE: 11/3/2022 2:56:26 PM
 FILE: C:\Users\swalker7\OneDrive\058 REALIGNMENT PLAN & PROFILE TEST.dgn

DATE: 11/2/2022 4:21:34 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab\edge\edge.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from one format to another.

DEFINITION OF TREATMENT ZONES FOR VARIOUS EDGE CONDITIONS

Edge Height (D) in Inches versus Lateral Clearance (Y) in Feet

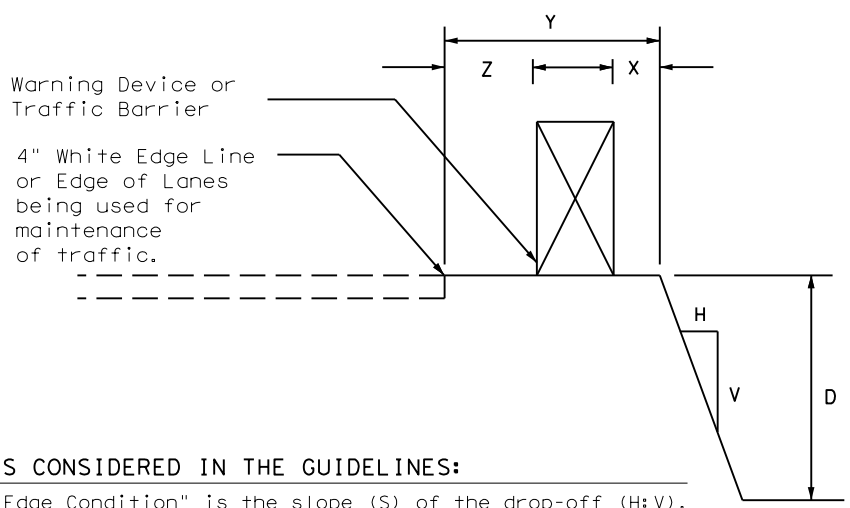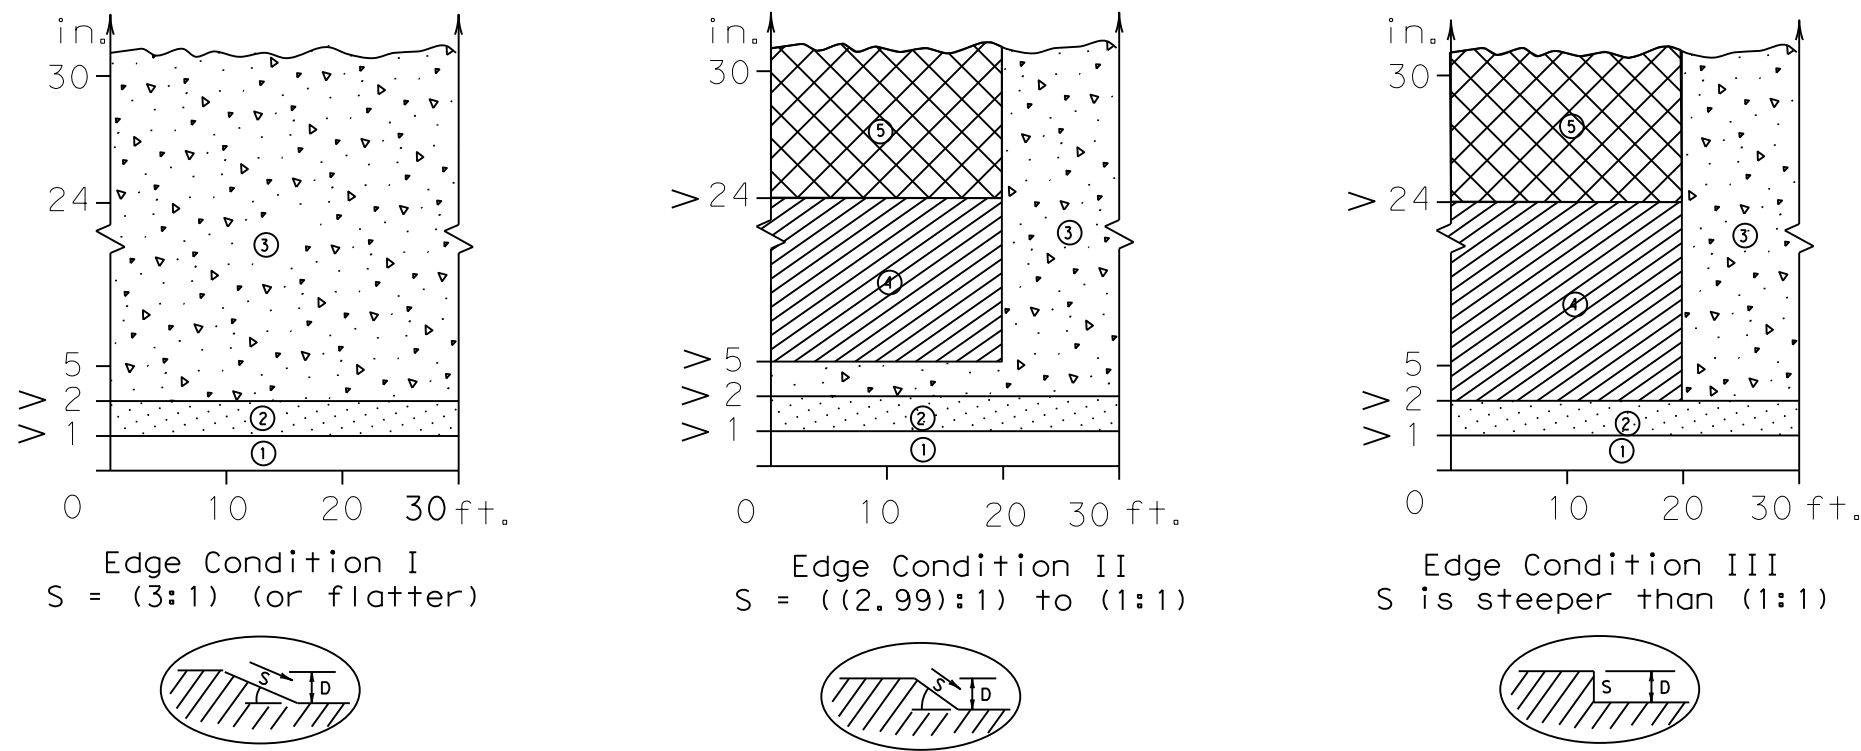

Zone	Treatment Types Guidelines:
①	No treatment
②	CW 8-11 "Uneven Lanes" signs.
③	CW 8-9a Shoulder Drop-Off" or CW 8-11 signs plus vertical panels.
④	CW8-9a or CW 8-11, signs plus drums. Where restricted space precludes the use of drums, use vertical panels. An edge slope to that of the profered Edge Condition I.
⑤	Check indications (Figure-1) for possitive barrier. Where positive barrier is not indicated, the treatment shown above for Zone-4 may be used after consideration of other applicable factors.


FACTORS CONSIDERED IN THE GUIDELINES:

- The "Edge Condition" is the slope (S) of the drop-off (H:V). The "Edge Height" is the depth of the drop-off "D".
- Distance "X" is to be the maximum practical under job conditions. Two feet minimum for high speed conditions. Distance "Y" is the lateral clearance from edge of travel lane to edge of dropoff. Distance "Z" does not have a minimum.
- In addition to the factors considered in the guidelines, each construction zone drop-off situation should be analyzed individually, taking into account other variables, such as: traffic mix, posted speed in the construction zone, horizontal curvature, and the practicality of the treatment options.
- The conditions for indicating the use of positive or protective barriers are given by Zone-5 and Figure-1. Traffic barriers are primarily applicable for high speed conditions. Urban areas with speeds of 30 mph or less may have a lesser need for signing, delineation, and barriers. Right-angled edges, however, with "D" greater than 2 inches and located within a lateral offset of 6 feet, may indicate a higher level of treatment.
- If the distance "Y" must be less than 3 feet, the use of a positive barrier may not be feasible. In such a case, consider either: 1) narrowing the lanes to a desired 11 to 12 feet or 10 foot minimum (see CW20-8 sign), or 2) provide an edge slope such as Edge Condition I.

Edge Condition Notes:

- Edge Condition I: Most vehicles are able to traverse an edge condition with a slope rate of (3 to 1) or flatter. The slope must be constructed with a compacted material capable of supporting vehicles.
- Edge Condition II: Most vehicles are able to traverse an edge condition with a slope between (2.99 to 1) and (1 to 1) so long as "D" does not exceed 5 inches. Under-carriage drag on most automobiles will occur when "D" exceeds 6 inches. As "D" exceeds 24 inches, the possibility for rollover is greater in most vehicles.
- Edge Condition III: When slopes are greater than (1 to 1) and where "D" is greater than 2 inches, a more difficult control factor may exist for some vehicles, if not properly treated. For example, where "D" is greater than 2 inches and up to 24 inches different types of vehicles may experience different steering control at different edge heights. Automobiles might experience more steering control differential when "D" is greater than 2 inches and up to 5 inches. Trucks, particularly those with high loads, have more steering control differential when "D" is greater than 5 inches and up to 24 inches. When "D" exceeds 24 inches, the possibility of rollover is greater for most vehicles.
- Milling or overlay operations that result in Edge Condition III should not be in place without appropriate warning treatments, and these conditions should not be left in place for extended periods of time.

FIGURE-1: CONDITIONS INDICATING USE OF POSITIVE BARRIER FOR ZONE 5 ([Cross-hatched])

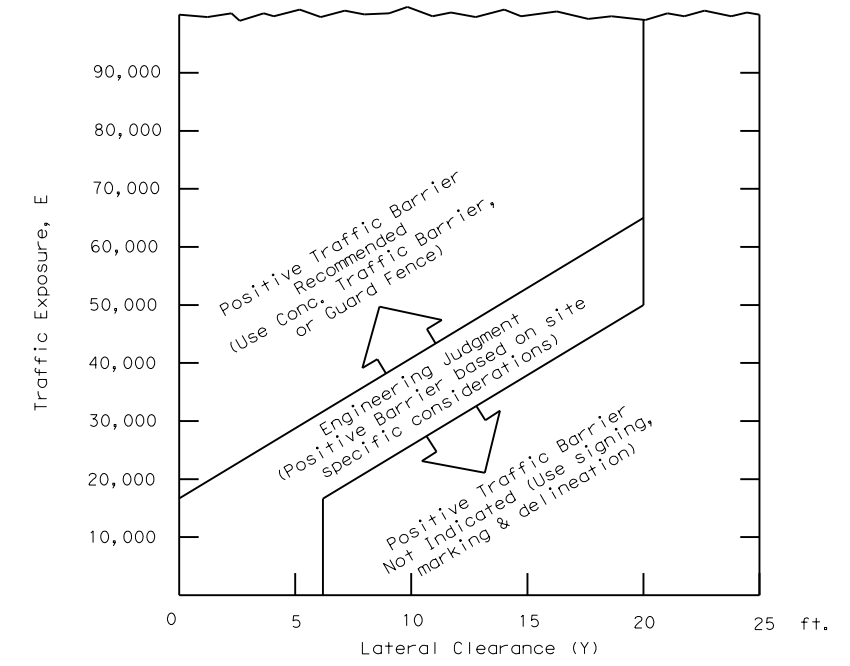

- $E = ADT \times T$
Where ADT is that portion of the average daily traffic volume traveling within 20 feet (generally two adjacent lanes) of the edge dropoff condition; and, T is the duration time in years of the dropoff condition.
- Figure-1 provides a practical approach to the use of positive barriers for the protection of vehicles from pavement drop-offs. Other factors, such as the presence of heavy machinery, construction workers, or the mix and volume of traffic may make the use of positive barriers appropriate, even when the edge condition alone may not justify the use of a barrier.
- An approved end treatment should be provided for any positive barrier end located within the clear zone.

These guidelines apply to temporary traffic control areas or work zones where continuous pavement edges or drop-offs exists parallel and adjacent to a lane used by traffic. The edge conditions may be present between shoulders and travel lanes, between adjacent or opposing travel lanes, or at intermediate points across the width of the paved surface. Due to the variability in construction operations, tolerances in the variables may be allowed by the engineer. These guidelines do not apply to short term operations. These guidelines do not constitute a rigid standard or policy; rather, they are guidance to be used in conjunction with engineering judgement. These guidelines may be updated on the Design Division's on-line manuals.

Engineer's Seal

11.03.22

Monte R. Rater P.E.

Texas Department of Transportation


Traffic Safety Division Standard

TREATMENT FOR VARIOUS EDGE CONDITIONS


FILE: edgecon.dgn	DN:	CK:	DW:	CK:
© TxDOT August 2000	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
03-01	DIST	COUNTY	SHEET NO.	
08-01	PAR	GRAYSON	59	
9-21				

DATE: 11/3/2022 4:41:48 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower1\TPWD parking lot rehab projects CSJ 0901-19-176. etc\Submittal\95% Plans\DGNs\060 HOTMIX LONGITUDINAL JOINT DETAIL.dgn

DW: CK: DW: CK:

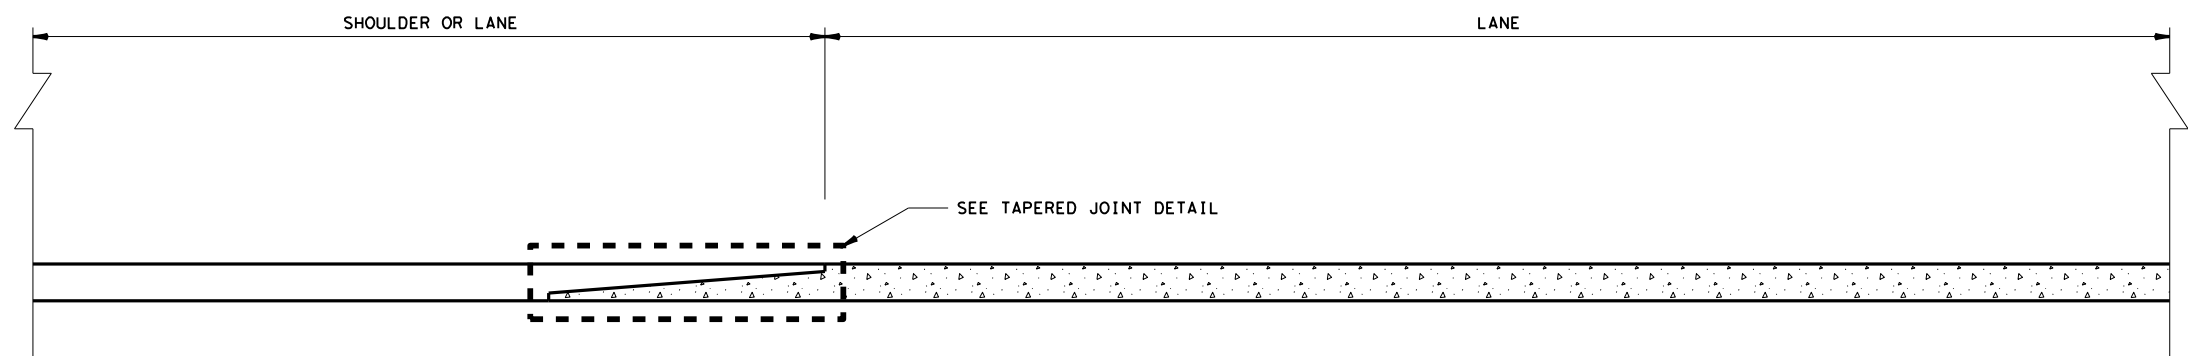

CROSS-SECTIONAL VIEW OF LONGITUDINAL JOINT

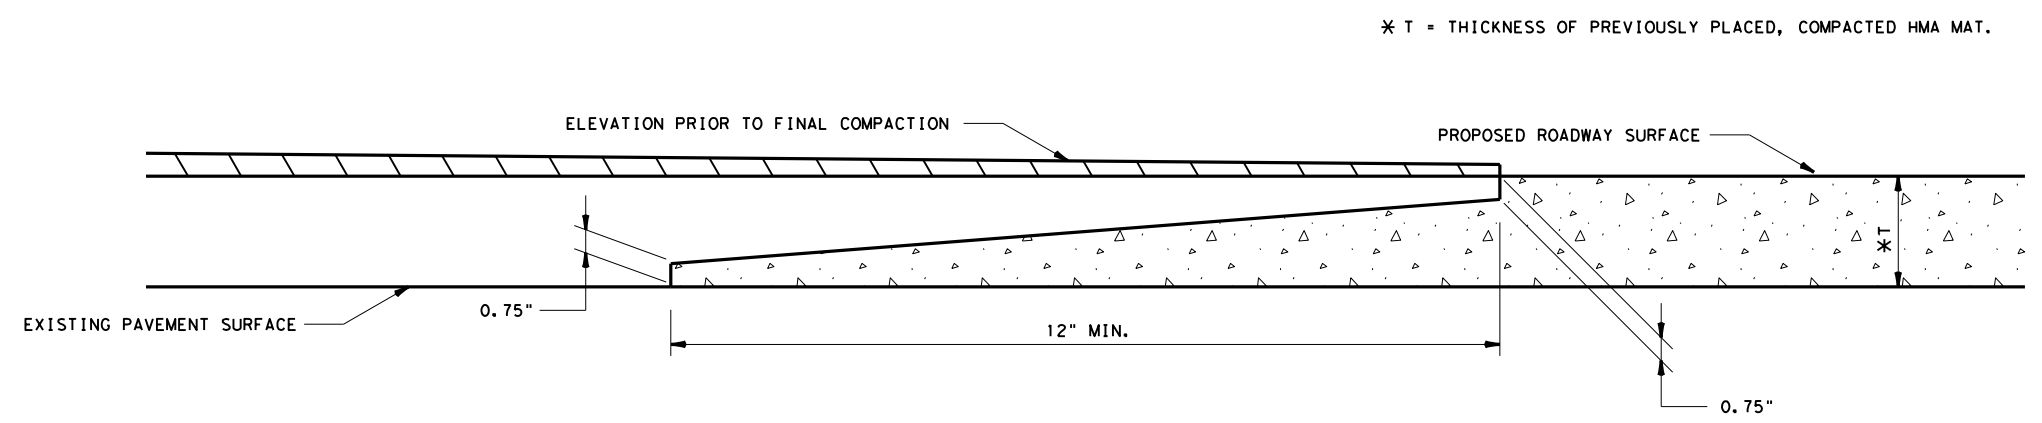

SEE TYPICAL SECTION FOR DEPTH AND TYPE OF HMA

TAPERED JOINT DETAIL

- NOTES:**
- EXTEND THE TAPERED PORTION OF THE MAT BEYOND THE NORMAL LANE WIDTH.
 - CONSTRUCT THE TAPERED PORTION OF THE MAT USING AN APPROVED STRIKE-OFF DEVICE THAT WILL PROVIDE A UNIFORM SLOPE AND WILL NOT RESTRICT THE MAIN SCREED.
 - APPLY TACK COAT TO THE IN-PLACE TAPER BEFORE THE ADJACENT MAT IS PLACED.
 - FINAL DENSITY REQUIREMENTS FOR THE ENTIRE PAVEMENT, INCLUDING THE TAPER AREA, WILL NOT CHANGE.
 - COMPACTION OF THE INITIAL TAPER SECTION WILL BE REQUIRED TO BE AS NEAR TO FINAL DENSITY AS POSSIBLE.

Monte R. Rater P.E.
 11.03.22







EISENHOWER STATE PARK
 HOTMIX LONGITUDINAL JOINT DETAIL

©2023 SHEET 1 OF 1



CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	60	

DATE: 11/14/2022 9:38:35 AM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ_0901-19-176_etcl\Submittal\95%_Plans\DGNS\061_MISCELLANEOUS_DETAILS.dgn

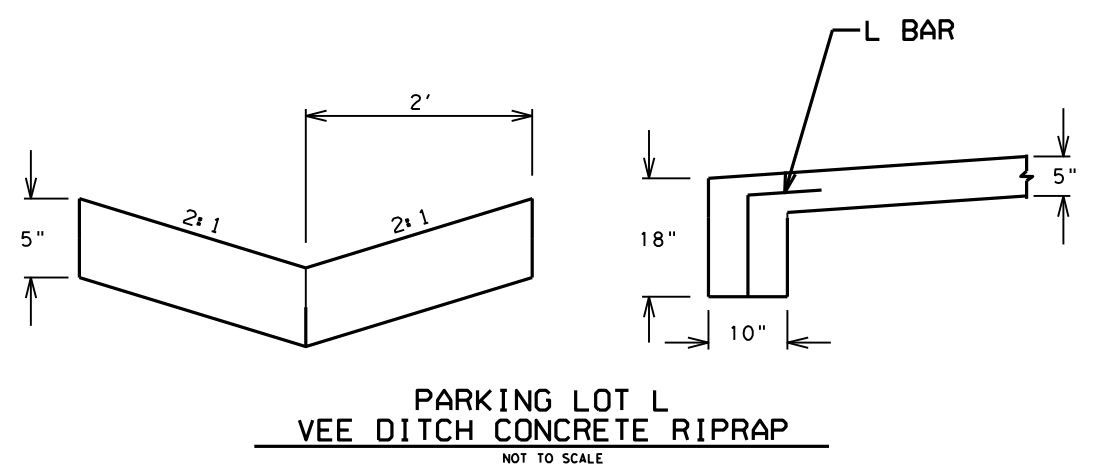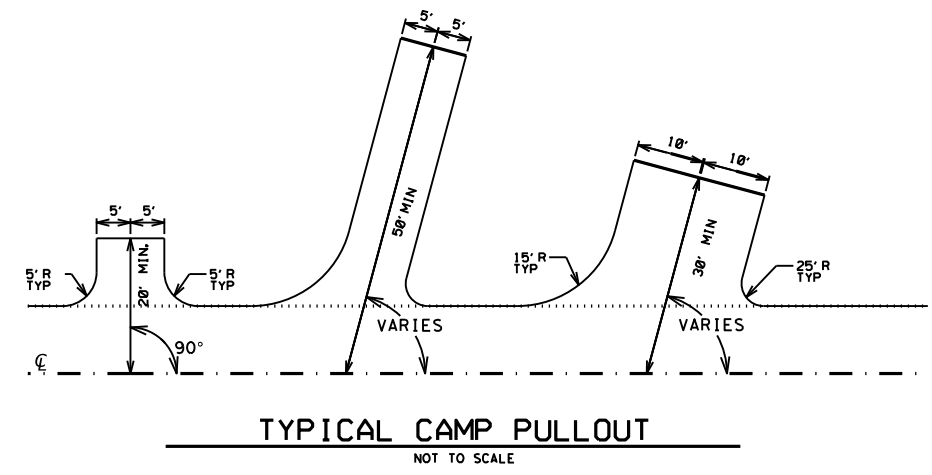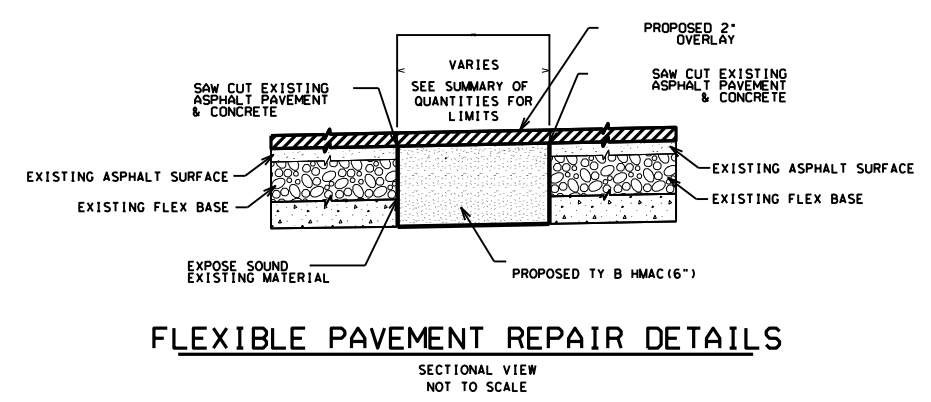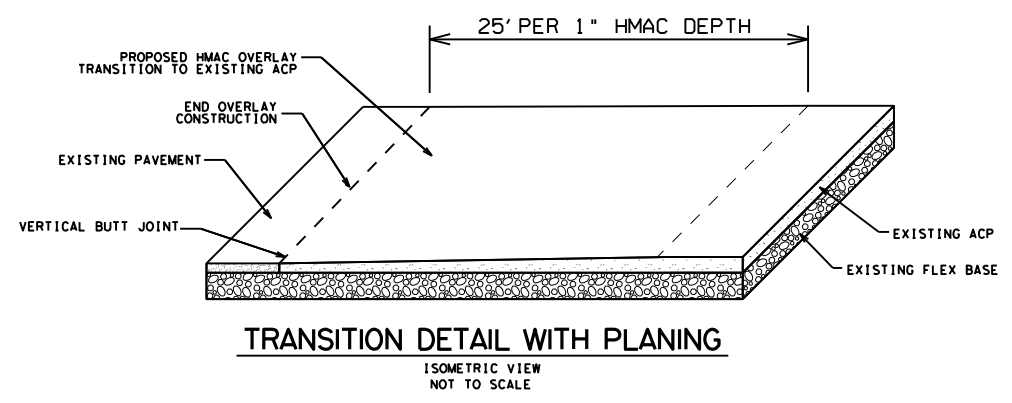

CONCRETE RIPRAP REINFORCEMENT
 5" CONCRETE RIPRAP ~
 #4 BARS WITH 3"
 CLEAR FROM RIPRAP EDGE WITH
 #3 INTERIOR GRID BAR AT 16"
 C-C SPACING. CENTER BARS
 MIDDLE OF 5" RIPRAP DEPTH.

TOEWALL REINFORCEMENT
 TWO #4 BARS PLACED
 VERTICALLY AND EQUALLY SPACED
 BETWEEN SURFACE REBAR AND
 BOTTOM OF TOE WALL.
 INSTALL #3 L BARS WITH
 15" "LEGS" AT 15"
 HORIZONTAL SPACING

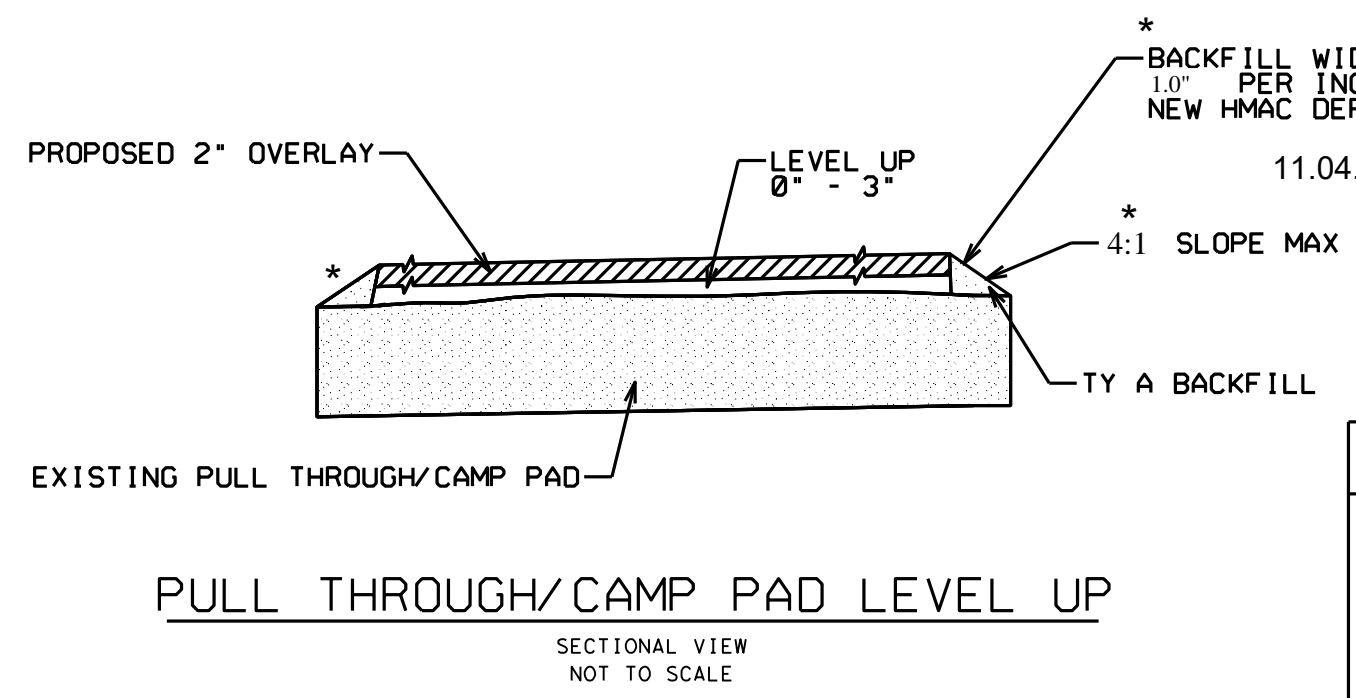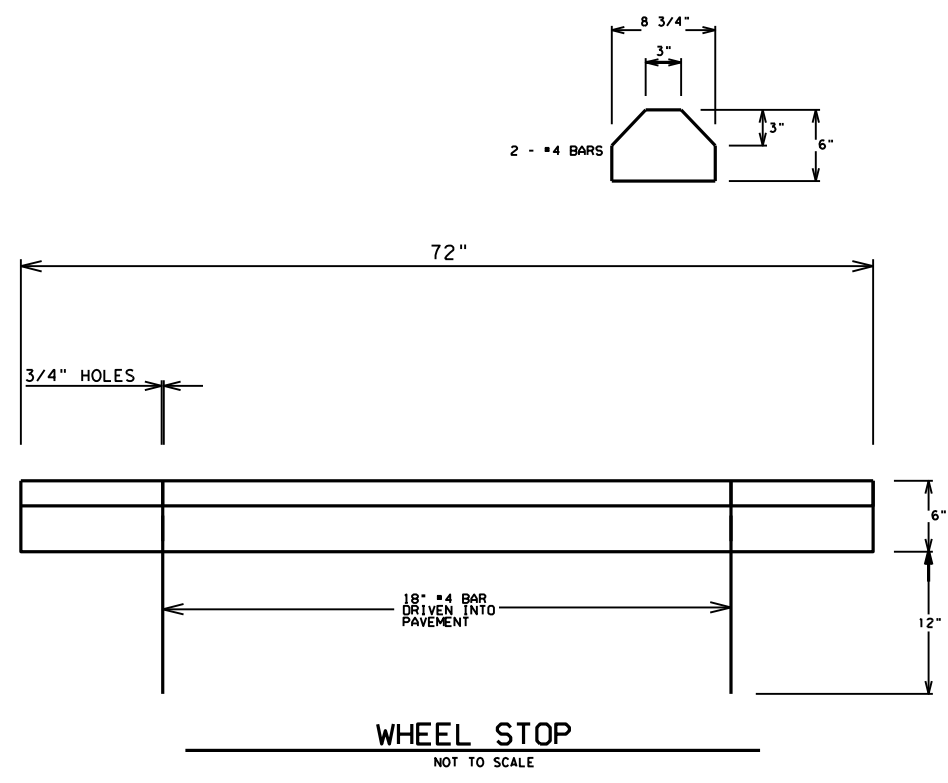

Monte R. Rater P.E.
 11.04.22
 STATE OF TEXAS
 MONTE L. RATER
 95859
 LICENSED PROFESSIONAL ENGINEER

Texas Department of Transportation

EISENHOWER STATE PARK
MISCELLANEOUS DETAILS


© 2023 SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	61	


Note: Refer to SS 5150 for wheel stop construction details.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: \$DATES\$
FILE: \$FILES\$

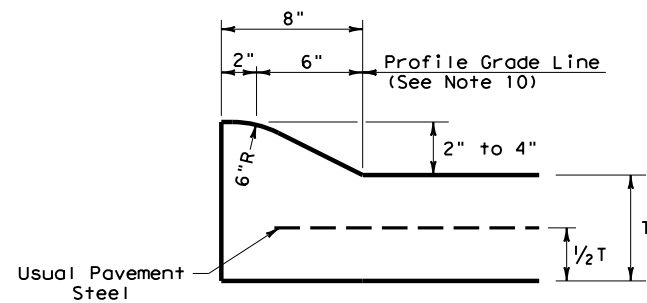


TYPE I CURB (MONOLITHIC)
2" - 4" HEIGHT

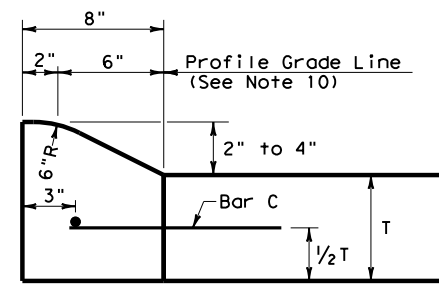


TYPE I CURB
2" - 4" HEIGHT

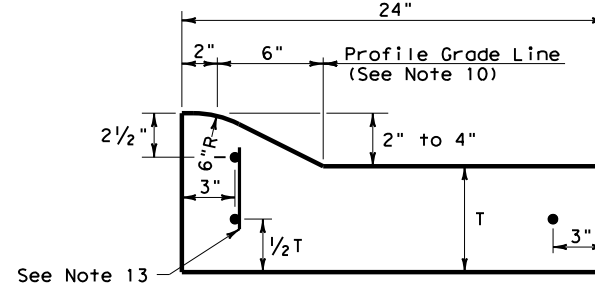


TYPE I CURB AND GUTTER
2" - 4" HEIGHT

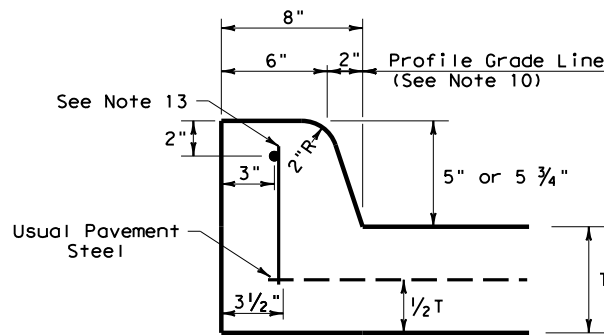


TYPE II CURB (MONOLITHIC)
5" - 5 3/4" HEIGHT

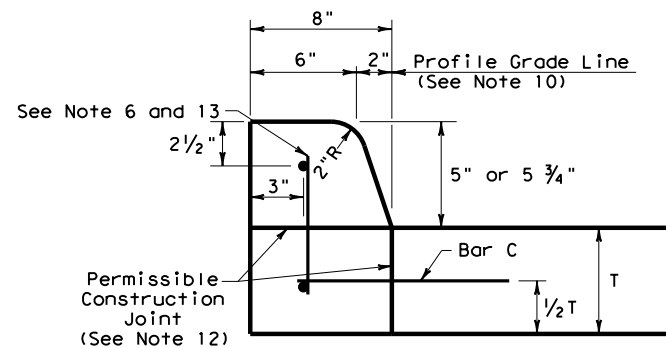


TYPE II CURB
5" - 5 3/4" HEIGHT

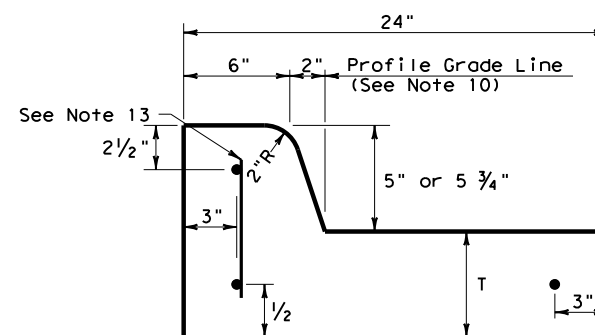


TYPE II CURB AND GUTTER
5" - 5 3/4" HEIGHT

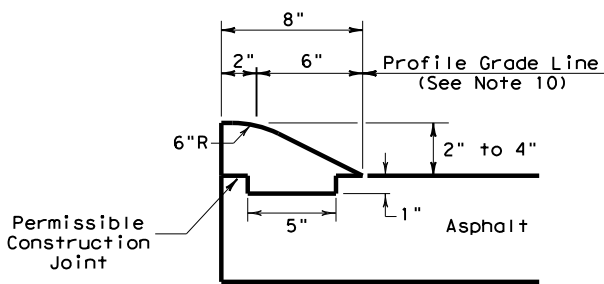


TYPE III CURB (KEYED)
2" - 4" HEIGHT

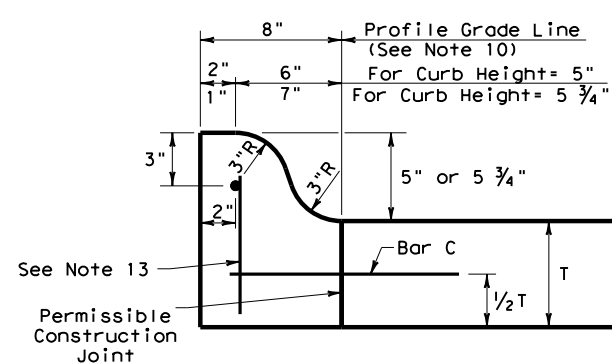


TYPE IIa CURB
5" - 5 3/4" HEIGHT

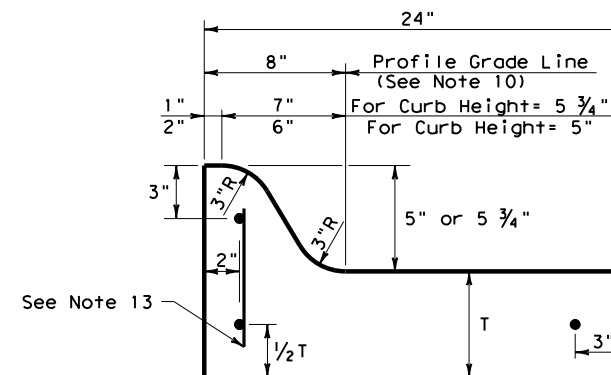


TYPE IIa CURB AND GUTTER
5" - 5 3/4" HEIGHT

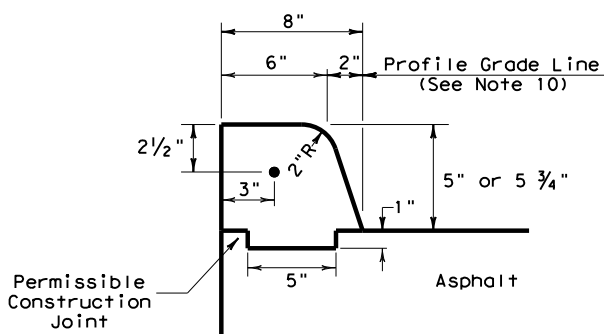

TYPE IV CURB (KEYED)
5" - 5 3/4" HEIGHT

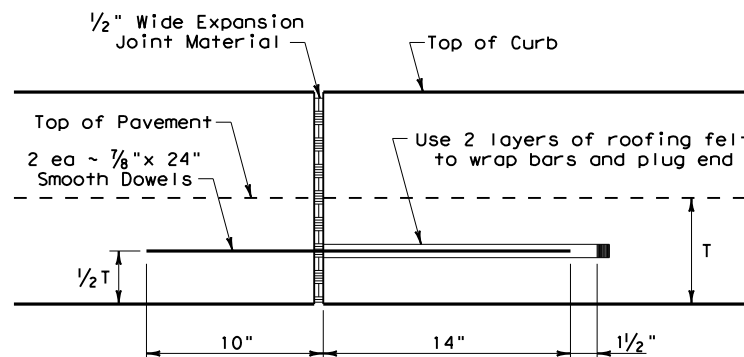

EXPANSION JOINT DETAIL

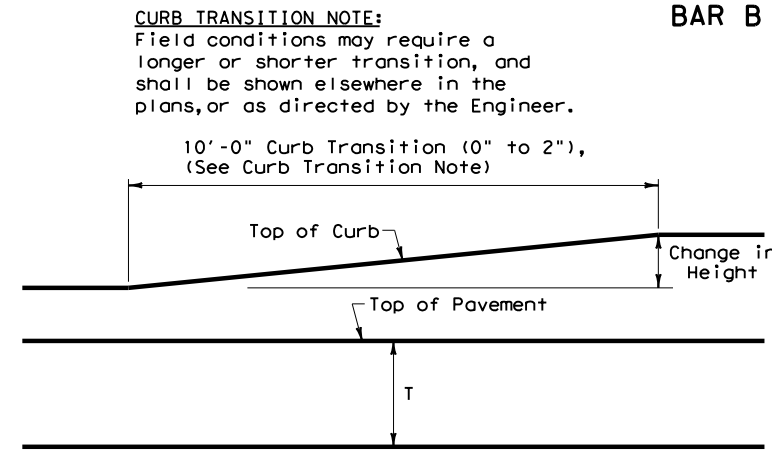


CURB TRANSITION

Note: To be paid for as Highest Curb

GENERAL NOTES

- All materials and construction shall be in accordance with Item 529, "Concrete Curb, Gutter, and Combined Curb and Gutter."
- Concrete shall be Class A.
- When reinforcing bars are used, they shall be No.4 unless otherwise shown. The use of fiber reinforced concrete in lieu of reinforcing steel is acceptable. Use fibers meeting the requirements of DMS 4550, "Fibers for Concrete," and dose fibers in accordance with Material Producers List (MPL) "Fibers for Class A and B Concrete Applications."
- Round exposed sharp edges with a rounding tool, to a minimum radius of 1/4 inch.
- All existing curbs and driveways to be removed shall be sawed or removed at existing joints.
- Where concrete curb is to be placed on existing concrete pavement, Bar B may be drilled and grouted in place, or may be inserted into fresh concrete.
- Expansion and contraction joints shall be constructed to match pavement joints in all curbs and curb and gutter adjacent to jointed concrete pavement. Where placement of curb or curb and gutter is not adjacent to concrete pavement, expansion joints shall be provided at structures, curb returns at streets, and at locations directed by The Engineer.
- Vertical and horizontal dowel bars and transverse reinforcing bars shall be placed at four feet C-C.
- Dimension 'T' shown is the thickness of concrete pavement. When curb is installed adjacent to flexible pavement dimension 'T' is 8" maximum.
- Usual profile grade line. Refer to typical sections and plan-profile sheets for exact locations.
- One-half inch expansion joint material shall be provided where curb or curb and gutter is adjacent to sidewalk or riprap.
- When horizontal permissible construction joints are used, the longitudinal pavement steel shall be placed in accordance with pavement details shown elsewhere in the plans. Reinforcing steel for curb section shall then conform to that required for concrete curb.
- Bar B placement as needed (typically at four ft. C-C) to support curb reinforcing steel during concrete placement.

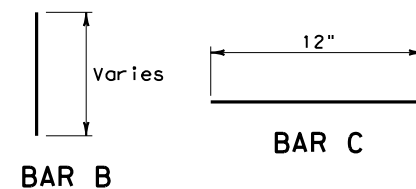


CURB TRANSITION NOTE:
Field conditions may require a longer or shorter transition, and shall be shown elsewhere in the plans, or as directed by the Engineer.

		Design Division Standard	
<h2>CONCRETE CURB AND GUTTER</h2>			
<h3>CCCG-22</h3>			
FILE: cccg21.dgn	DN: TxDOT	CK: AN	DW: CS
© TxDOT: JUNE 2022	CONT: 0901	SECT: 19	JOB: 176
REVISIONS	DIST: COUNTY		HIGHWAY: VARIOUS
	PAR	GRAYSON	SHEET NO. 62


DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 11/2/2022
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSJ 0901-19-176, etc\Submittal\95% Plans\DGNs\063 TE (HMAC) - 11.dgn

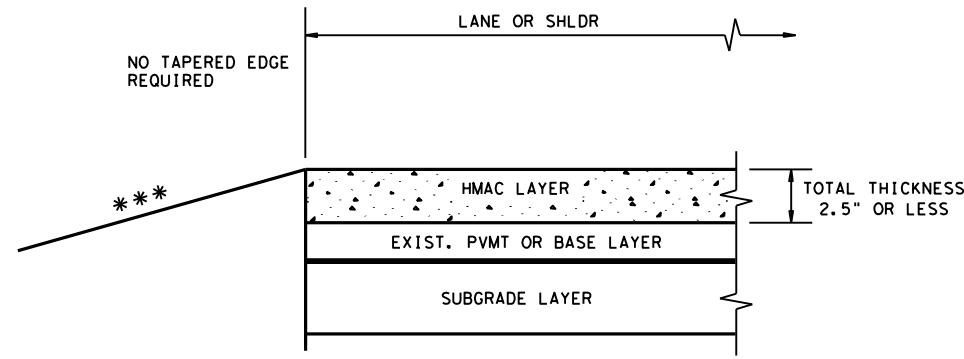

*** SEE TYPICAL SECTION FOR ROADSIDE DETAILS


CONDITION - 1
 THIN HMAC SURFACES OR HMAC OVERLAY
 WITH THICKNESS OF 2.5" OR LESS

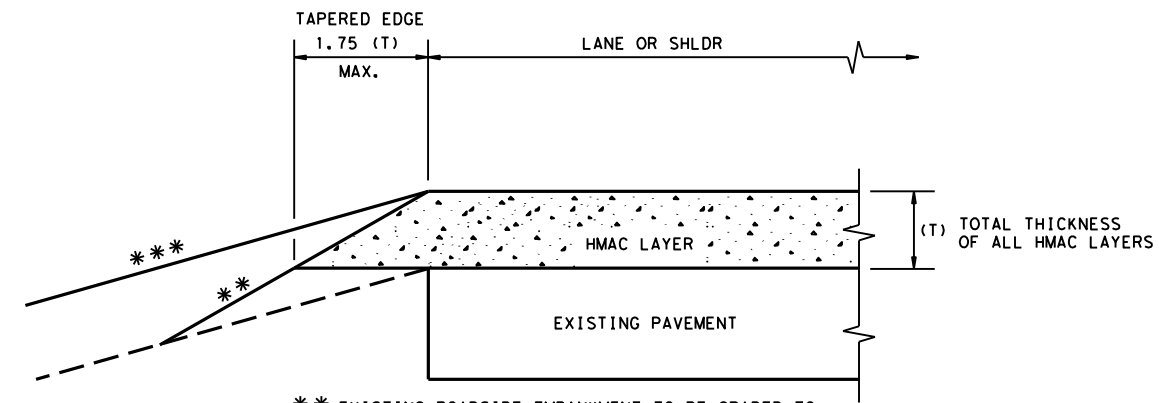

** EXISTING ROADSIDE EMBANKMENT TO BE GRADED TO PRODUCE A SMOOTH LEVEL SURFACE FOR PLACEMENT OF TAPERED EDGE. THIS WORK IS SUBSIDIARY TO THE VARIOUS BID ITEMS.


*** SEE TYPICAL SECTION FOR ROADSIDE DETAILS

CONDITION - 2
 OVERLAY OF EXISTING PAVEMENT
 HMAC THICKNESS 2.5" TO 5"

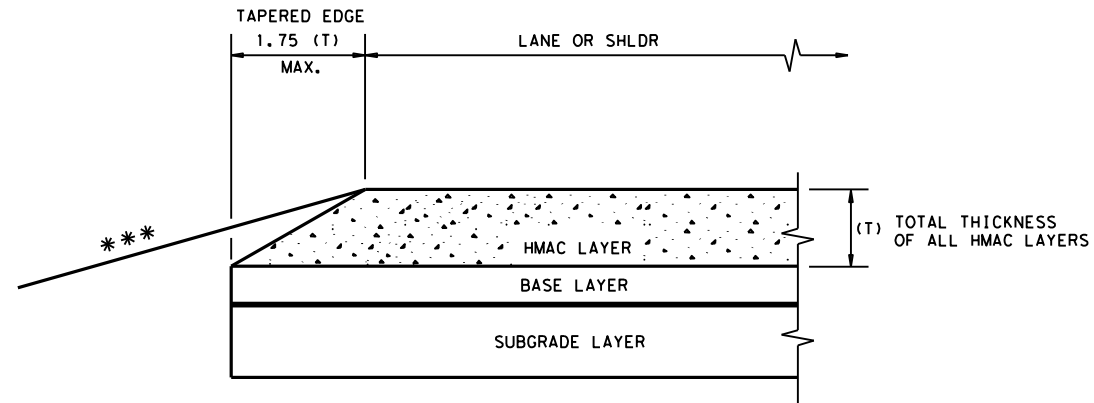

*** SEE TYPICAL SECTION FOR ROADSIDE DETAILS

CONDITION - 3
 NEW OR RECONSTRUCTED PAVEMENT
 HMAC THICKNESS 2.5" TO 5"

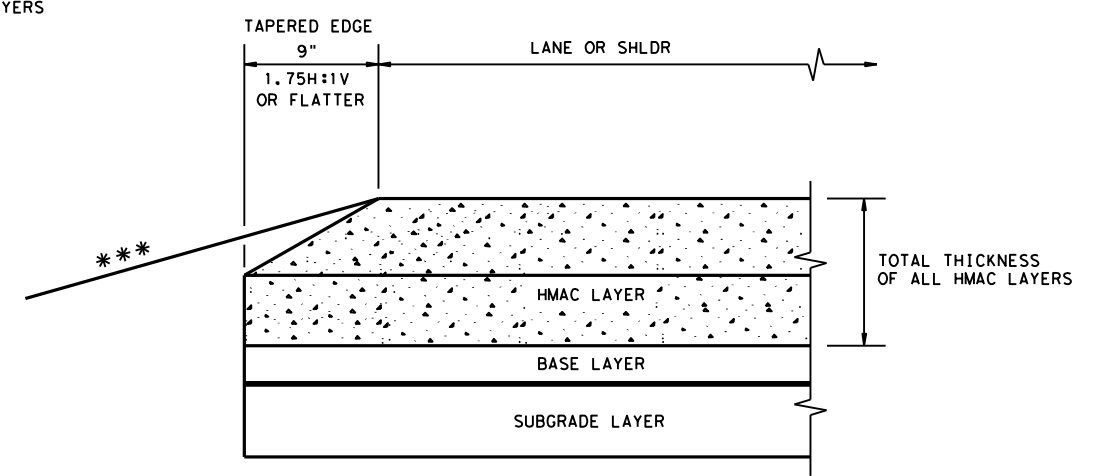

*** SEE TYPICAL SECTION FOR ROADSIDE DETAILS

CONDITION - 4
 NEW OR RECONSTRUCTED PAVEMENT
 HMAC THICKNESS 5" OR GREATER

GENERAL NOTES


1. UNLESS OTHERWISE SHOWN IN THE PLANS, A VERTICAL EDGE IS PERMISSIBLE FOR HMAC PLACED GREATER THAN 5" BELOW THE EDGE OF PAVEMENT AND FOR THICKNESS OF HMAC LESS THAN 2.5".
2. FOR FURTHER INFORMATION REGARDING THE ROADSIDE AND PAVEMENT DETAILS, SEE TYPICAL SECTIONS.
3. PAYMENT FOR TAPERED EDGE WILL BE IN ACCORDANCE WITH APPLICABLE ITEMS IN THE CONTRACT.
4. THE SLOPE OF THE TAPERED EDGE SHALL BE 1.75H:1V OR FLATTER.
5. THE TAPERED EDGE SHALL BE PRODUCED BY USE OF A SCREED ATTACHMENT CAPABLE OF PRODUCING A SMOOTH COMPACTED SURFACE. ADDITIONAL COMPACTING EFFORT BEHIND THE SCREED IS NOT REQUIRED.

(NOT TO SCALE)


				Design Division Standard	
TAPERED EDGE DETAILS HMAC PAVEMENT					
TE (HMAC) - 11					
FILE: tehmac11.dgn	DN: TxDOT	CK: RL	DW: KB	CK:	
© TxDOT January 2011	CONT	SECT	JOB	HIGHWAY	
REVISIONS		0901 19	176	VARIOUS	
DIST	COUNTY	SHEET NO.			
PAR	GRAYSON	63			

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


DATE: 11/2/2022
 FILE: C:\Users\swal.ker\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSJ 0901-19-176, etc\Submittal\95% Plans\DGNS\064_GF (31)-19.dgn

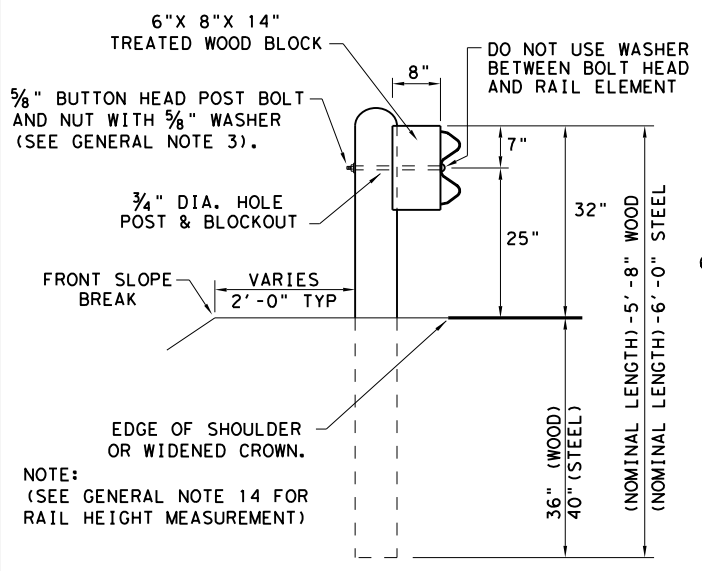

TYPICAL POST PLACEMENT

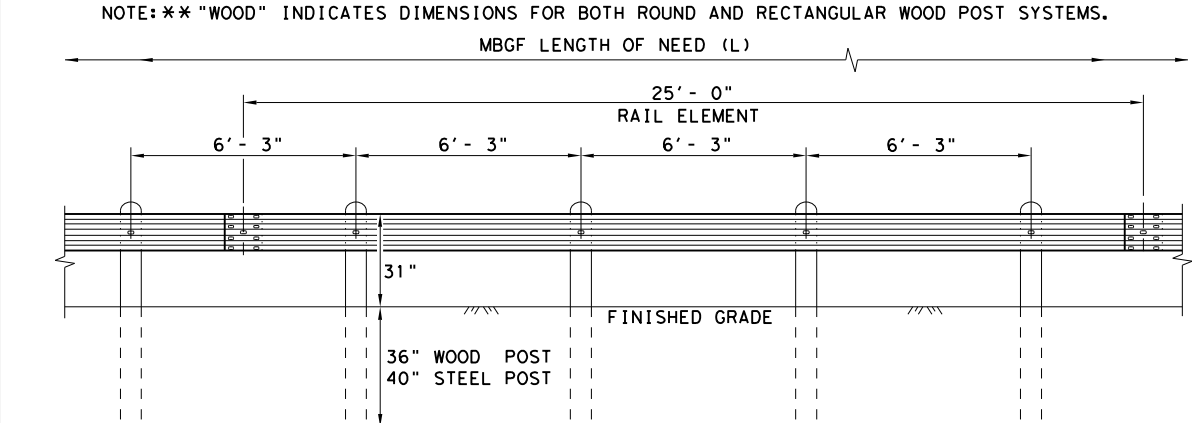

WOOD BLOCK TO ROUND WOOD POST

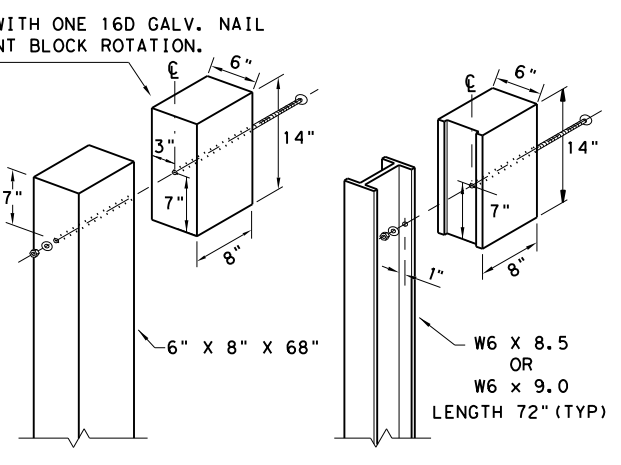


ROUTED WOOD BLOCK TO I-BEAM STEEL POST

- GENERAL NOTES**
1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
 2. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE DOWNSTREAM ANCHOR TERMINAL (DAT) AND THE TRANSITION SECTIONS OF GUARDRAIL.
 3. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC16G) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
 4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
 6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
 7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
 8. UNLESS OTHERWISE SHOWN IN THE PLANS, GUARD FENCE PLACED IN THE VICINITY OF CURBS SHALL BE POSITIONED SO THAT THE FACE OF CURB IS LOCATED DIRECTLY BELOW OR BEHIND THE FACE OF THE RAIL. RAIL PLACED OVER CURBS SHALL BE INSTALLED SO THAT THE POST BOLT IS LOCATED APPROXIMATELY 25 INCHES ABOVE THE GUTTER PAN OR EDGE OF SHOULDER.
 9. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. IF SOLID ROCK IS ENCOUNTERED WITHIN 0 TO 18" OF THE FINISHED GRADE, DRILL A 24" DIA. HOLE, 24" INTO THE ROCK. IF SOLID ROCK IS ENCOUNTERED BELOW 18", DRILL A 12" DIA. HOLE, 12" INTO THE ROCK OR TO THE STANDARD EMBEDMENT DEPTH, WHICHEVER MAYBE LESS. ANY EXCESS POST LENGTH, AFTER MEETING THESE DEPTHS, MAY BE FIELD CUT TO ENSURE PROPER GUARDRAIL MOUNTING HEIGHT. BACKFILL WITH COARSE AGGREGATE MATERIAL.
 10. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
 11. SPECIAL FABRICATION WILL BE REQUIRED AT INSTALLATION LOCATIONS HAVING A CURVATURE OF LESS THAN 150 FT. RADIUS.
 12. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TXDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210 ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
 13. FOR THE LOW FILL CULVERT OPTION, POSTS LOCATED PARTIALLY OR WHOLLY BETWEEN PRECAST BOX CULVERT UNITS, THE USE OF A CAST-IN-PLACE CONCRETE CLOSURE BETWEEN BOXES IS REQUIRED. THE LENGTH OF THE CAST-IN-PLACE CONCRETE CLOSURE SHALL ACCOMMODATE THE PLACEMENT OF THE LOW FILL CULVERT OPTION. SEE CONCRETE CLOSURE DETAILS ON BRIDGE STANDARD SCP-MD.
 14. GUARDRAIL HEIGHT MEASUREMENT: WHEN THE GUARDRAIL IS LOCATED ABOVE PAVEMENT, MEASURE THE HEIGHT FROM THE PAVEMENT TO THE TOP OF THE W-BEAM RAIL. WHEN THE GUARDRAIL IS LOCATED UP TO 2 FT. OFF OF THE EDGE OF PAVEMENT OR FOR A PAVEMENT OVERLAY, USE A 10-FOOT STRAIGHTEDGE TO EXTEND THE PAVEMENT/SHOULDER SLOPE TO THE BACK OF RAIL, MEASURE FROM THE BOTTOM OF STRAIGHTEDGE TO THE TOP OF RAIL. FOR GUARDRAIL LOCATED DOWN A 10:1 SLOPE, MEASURE FROM THE NOMINAL TERRAIN.




ELEVATION MID-SPAN RAIL SPLICE

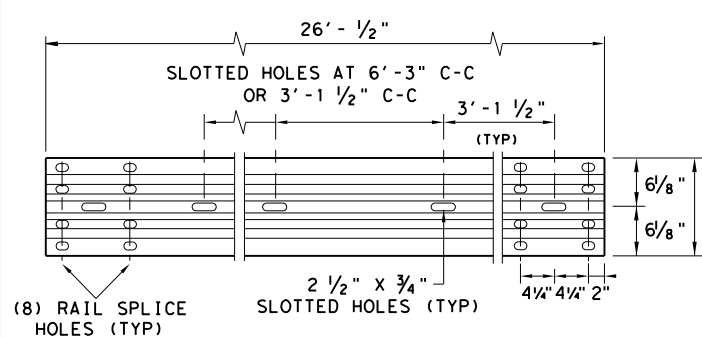


ELEVATION 25'-0 (NOM.) W-BEAM SECTION

NOTES: SEE GENERAL NOTE 2 FOR ALLOWABLE RAIL TYPES. SEE RAIL SPLICE DETAIL FOR REQUIRED HARDWARE.

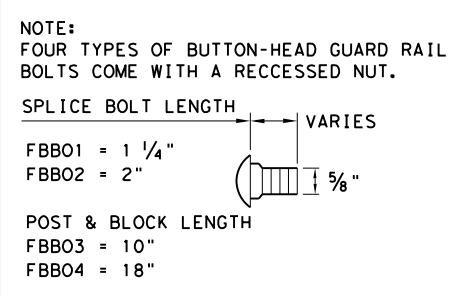

BUTTON HEAD BOLT


NOTE: SEE GENERAL NOTE 3 FOR SPLICE & POST BOLT DETAILS.

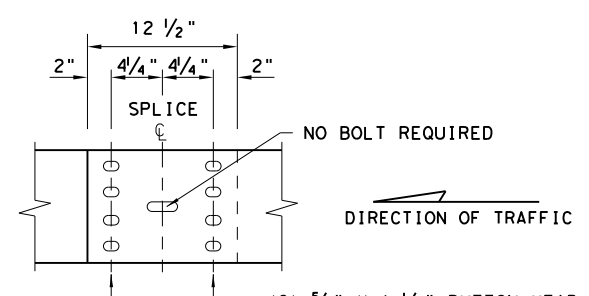

MID-SPAN RAIL SPLICE DETAIL

NOTE: GF(31), MID-SPAN RAIL SPLICES ARE REQUIRED WITH 6'-3" POST SPACINGS.

* POST(S) MAY REQUIRE FIELD MODIFICATION TO ENSURE PROPER GUARDRAIL HEIGHT.

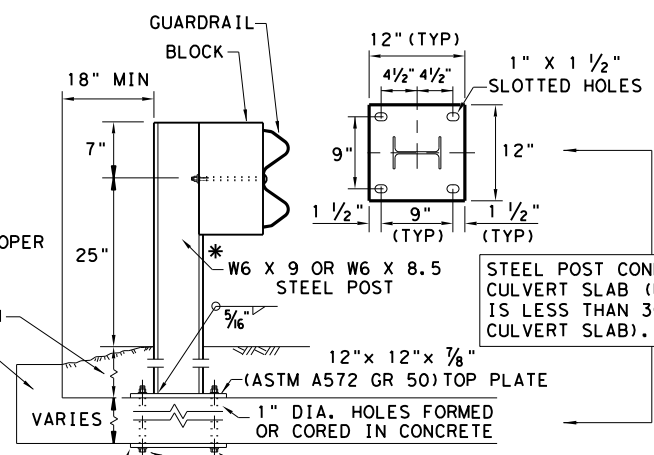


LOW FILL CULVERT POST

1. **BOLT-THROUGH OPTION:** REQUIRES A 6" MIN. SLAB THICKNESS. 7/8" DIA (ASTM A449) HEAVY HEX BOLTS WITH TWO HARDENED WASHER EACH AND HEAVY HEX NUTS. NOTE: BOLT LENGTH = SLAB PLUS 2 1/4" MIN.
2. **EPOXY ANCHOR OPTION:** THIS OPTION MAY ONLY BE USED IF THE CULVERT SLAB IS 9" MIN. THICK. THREADED ANCHOR RODS MUST BE 7/8" DIA. ASTM A449 OR A193 GRADE B7 WITH HEAVY HEX NUT, AND ONE HARDENED WASHER EACH. EMBED ANCHOR RODS 6" WITH HILTI HIT RE 500 EPOXY ADHESIVE. OTHER TYPE III CLASS C EPOXY ADHESIVES MEETING THE REQUIREMENTS OF DMS-6100, "EPOXIES AND ADHESIVES", MAY BE USED IF IT CAN BE DEMONSTRATED THAT THEY MEET OR EXCEED THE STRENGTH OF HILTI HIT RE 500 WITH THE SAME EMBEDMENT DEPTH AND THREADED ROD DIA. FOLLOW THE MANUFACTURER'S REQUIREMENTS FOR INSTALLING EPOXIED THREADED RODS. EXTEND RODS 1/4" MIN. BEYOND NUT.

NOTE: CULVERTS OF 25 FT. OR LESS, SEE GF(31)LS STANDARD FOR "LONG SPAN" OPTION.




				Design Division Standard
METAL BEAM GUARD FENCE TL-3 MASH COMPLIANT GF (31) - 19				
FILE: gf3119.dgn	DN: TXDOT	CK: KM	DW: VP	CK: CGL/AG
© TXDOT: NOVEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
	DIST	COUNTY	SHEET NO.	
	PAR	GRAYSON	64	

DATE: 11/2/2022
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSJ 0901-19-176, etc\Submittal\101.95% Plans\DGNS\065_SGT (12S) 31-18.dgn
 DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

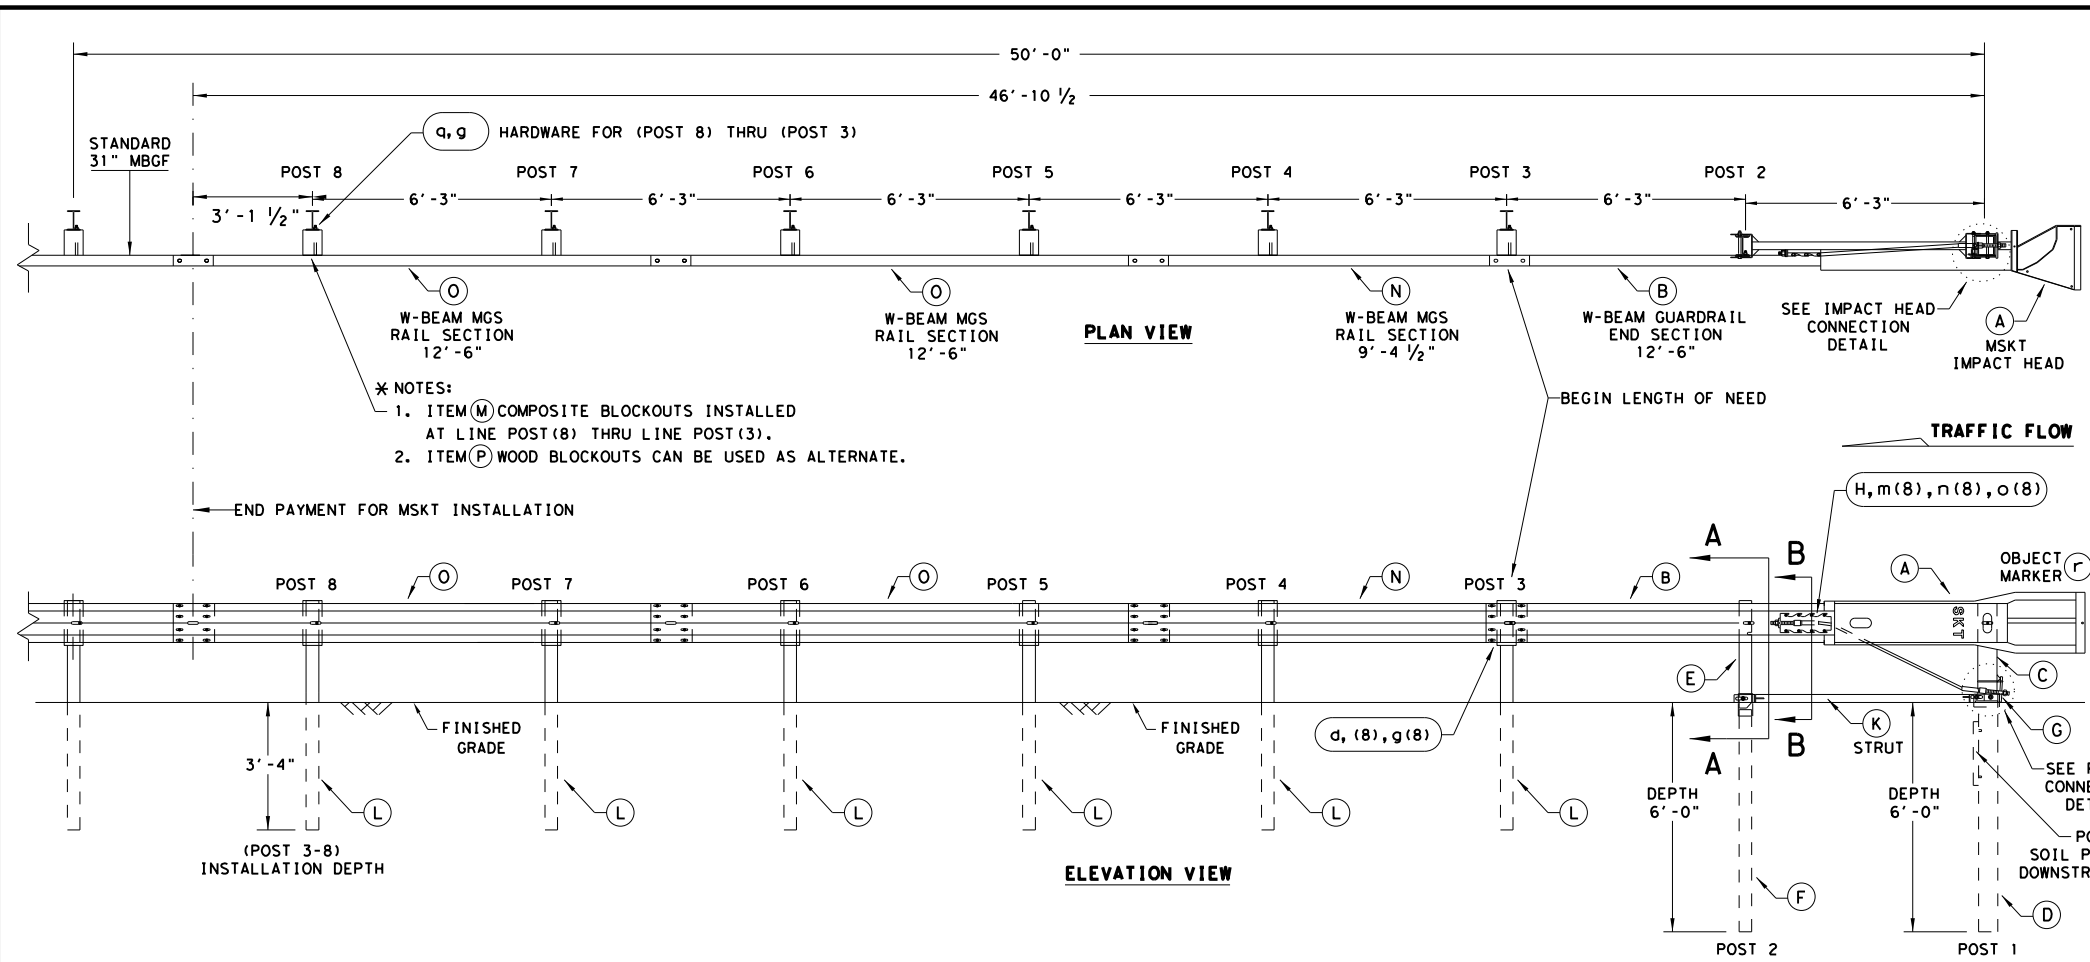

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
 - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
 - A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBSG STANDARD FOR INSTALLATION GUIDANCE.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - SYSTEM MUST BE ATTACHED TO STANDARD 31" MBSG.
 - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
 - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRANCHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
 - THE SYSTEM IS SHOWN WITH TWO 12'-6" MBSG PANELS, ONE 25'-0" MBSG PANEL IS ALSO ALLOWED IN ITS PLACE.
 - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM NUMBERS
A	1	MSKT IMPACT HEAD	MS3000
B	1	W-BEAM GUARDRAIL END SECTION, 12 Go.	SF1303
C	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
D	1	POST 1 - BOTTOM (6' W6X15)	MTPHP1B
E	1	POST 2 - ASSEMBLY TOP	UHP2A
F	1	POST 2 - ASSEMBLY BOTTOM (6' W6X9)	HP2B
G	1	BEARING PLATE	E750
H	1	CABLE ANCHOR BOX	S760
J	1	BCT CABLE ANCHOR ASSEMBLY	E770
K	1	GROUND STRUT	MS785
L	6	W6X9 OR W6X8.5 STEEL POST	P621
M	6	COMPOSITE BLOCKOUTS	CBSP-14
N	1	W-BEAM MGS RAIL SECTION (9'-4 1/2")	G12025
O	2	W-BEAM MGS RAIL SECTION (12'-6")	G1203A
P	6	WOOD BLOCKOUT 6" X 8" X 14"	P675
Q	1	W-BEAM MGS RAIL SECTION (25'-0")	G1209
SMALL HARDWARE			
a	2	5/8" x 1" HEX BOLT (GRD 5)	B5160104A
b	4	5/8" WASHER	W0516
c	2	5/8" HEX NUT	N0516
d	25	5/8" Dia. x 1 1/4" SPLICE BOLT (POST 2)	B580122
e	2	5/8" Dia. x 9" HEX BOLT (GRD A449)	B580904A
f	3	5/8" WASHER	W050
g	33	5/8" Dia. H.G.R NUT	N050
h	1	3/4" Dia. x 8 1/2" HEX BOLT (GRD A449)	B340854A
j	1	3/4" Dia. HEX NUT	N030
k	2	1 ANCHOR CABLE HEX NUT	N100
l	2	1 ANCHOR CABLE WASHER	W100
m	8	1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER	SB12A
n	8	1/2" STRUCTURAL NUTS	N012A
o	8	1 1/8" O.D. x 3/8" I.D. STRUCTURAL WASHERS	W012A
p	1	BEARING PLATE RETAINER TIE	CT-100ST
q	6	5/8" x 10" H.G.R. BOLT	B581002
r	1	OBJECT MARKER 18" X 18"	E3151

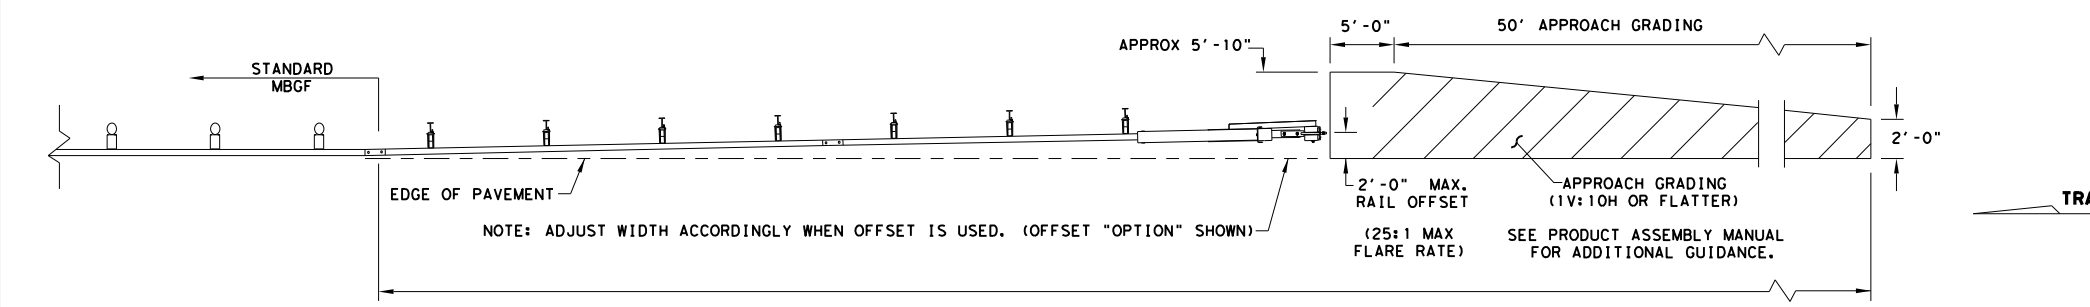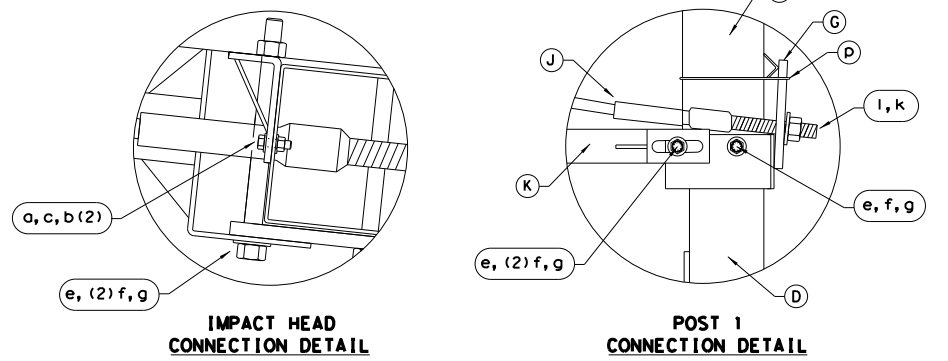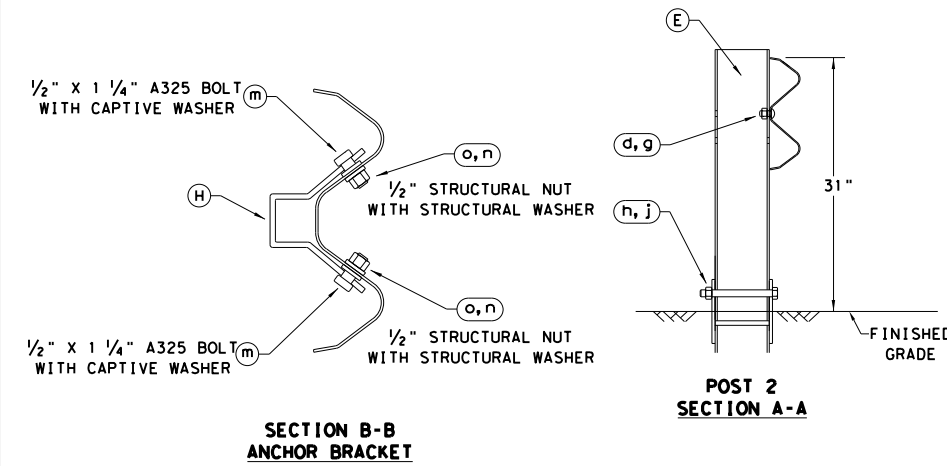

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

Design Division Standard

SINGLE GUARDRAIL TERMINAL







MSKT-MASH-TL-3

SGT (12S) 31-18

FILE: sgt12s3118.dgn	DN: TXDOT	CK: KM	DW: VP	CK: CL
© TXDOT: APRIL 2018	CONT SECT	JOB	HIGHWAY	
REVISIONS	0901 19	176	VARIOUS	
	DIST	COUNTY	SHEET NO.	
	PAR	GRAYSON	65	

DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 11/2/2022
 FILE: C:\Users\swal.ker\Desktop\Projects\Eisenhower\TPWD parking lot rehab\Projects_CSJ_0901-19-176, etc\Submittal\95% Plans\DGNS\066_SGT (15) 31-20.dgn

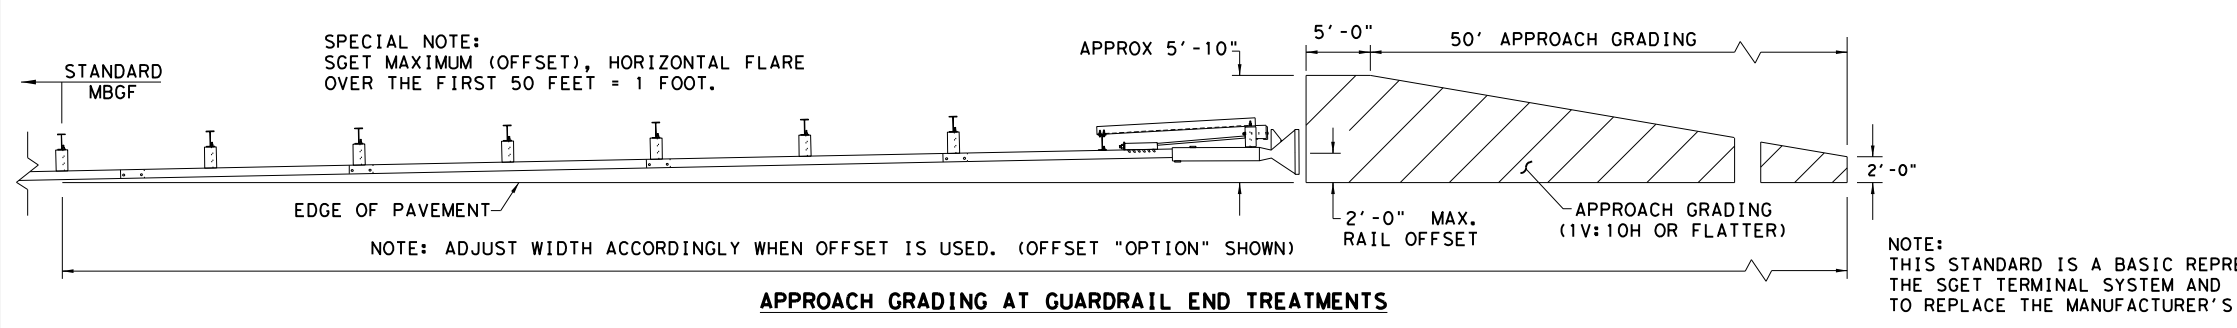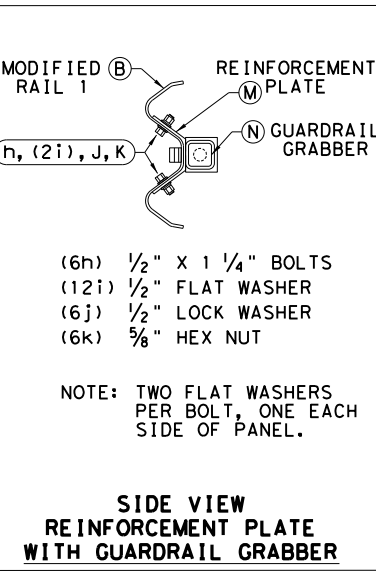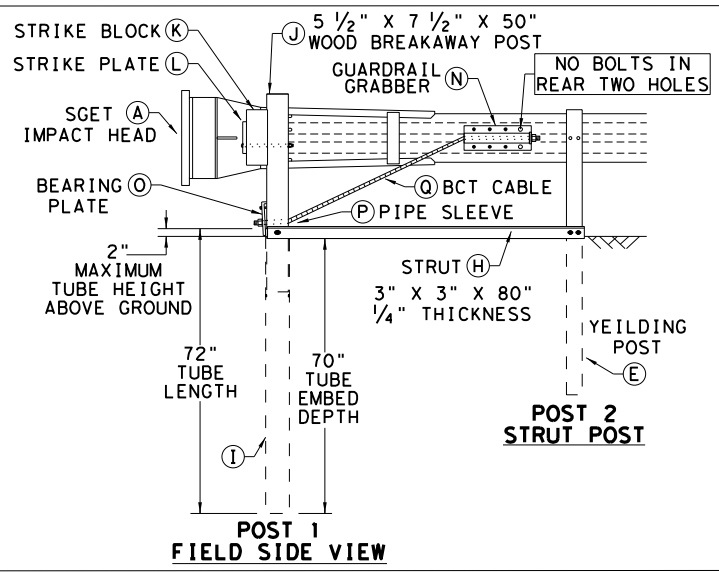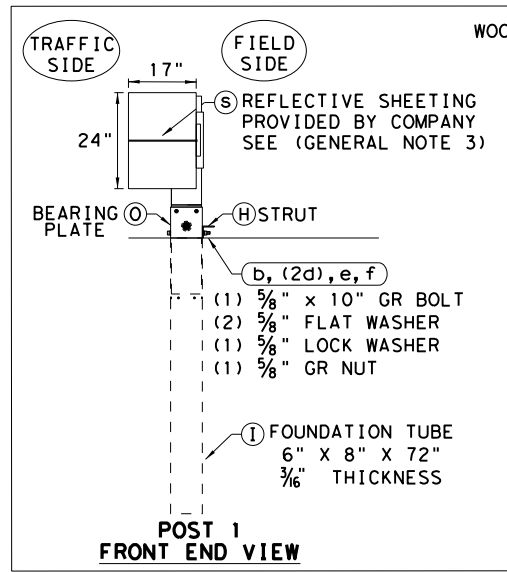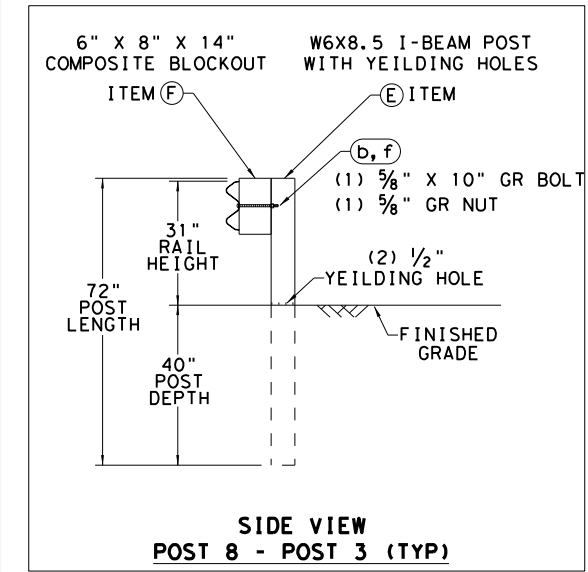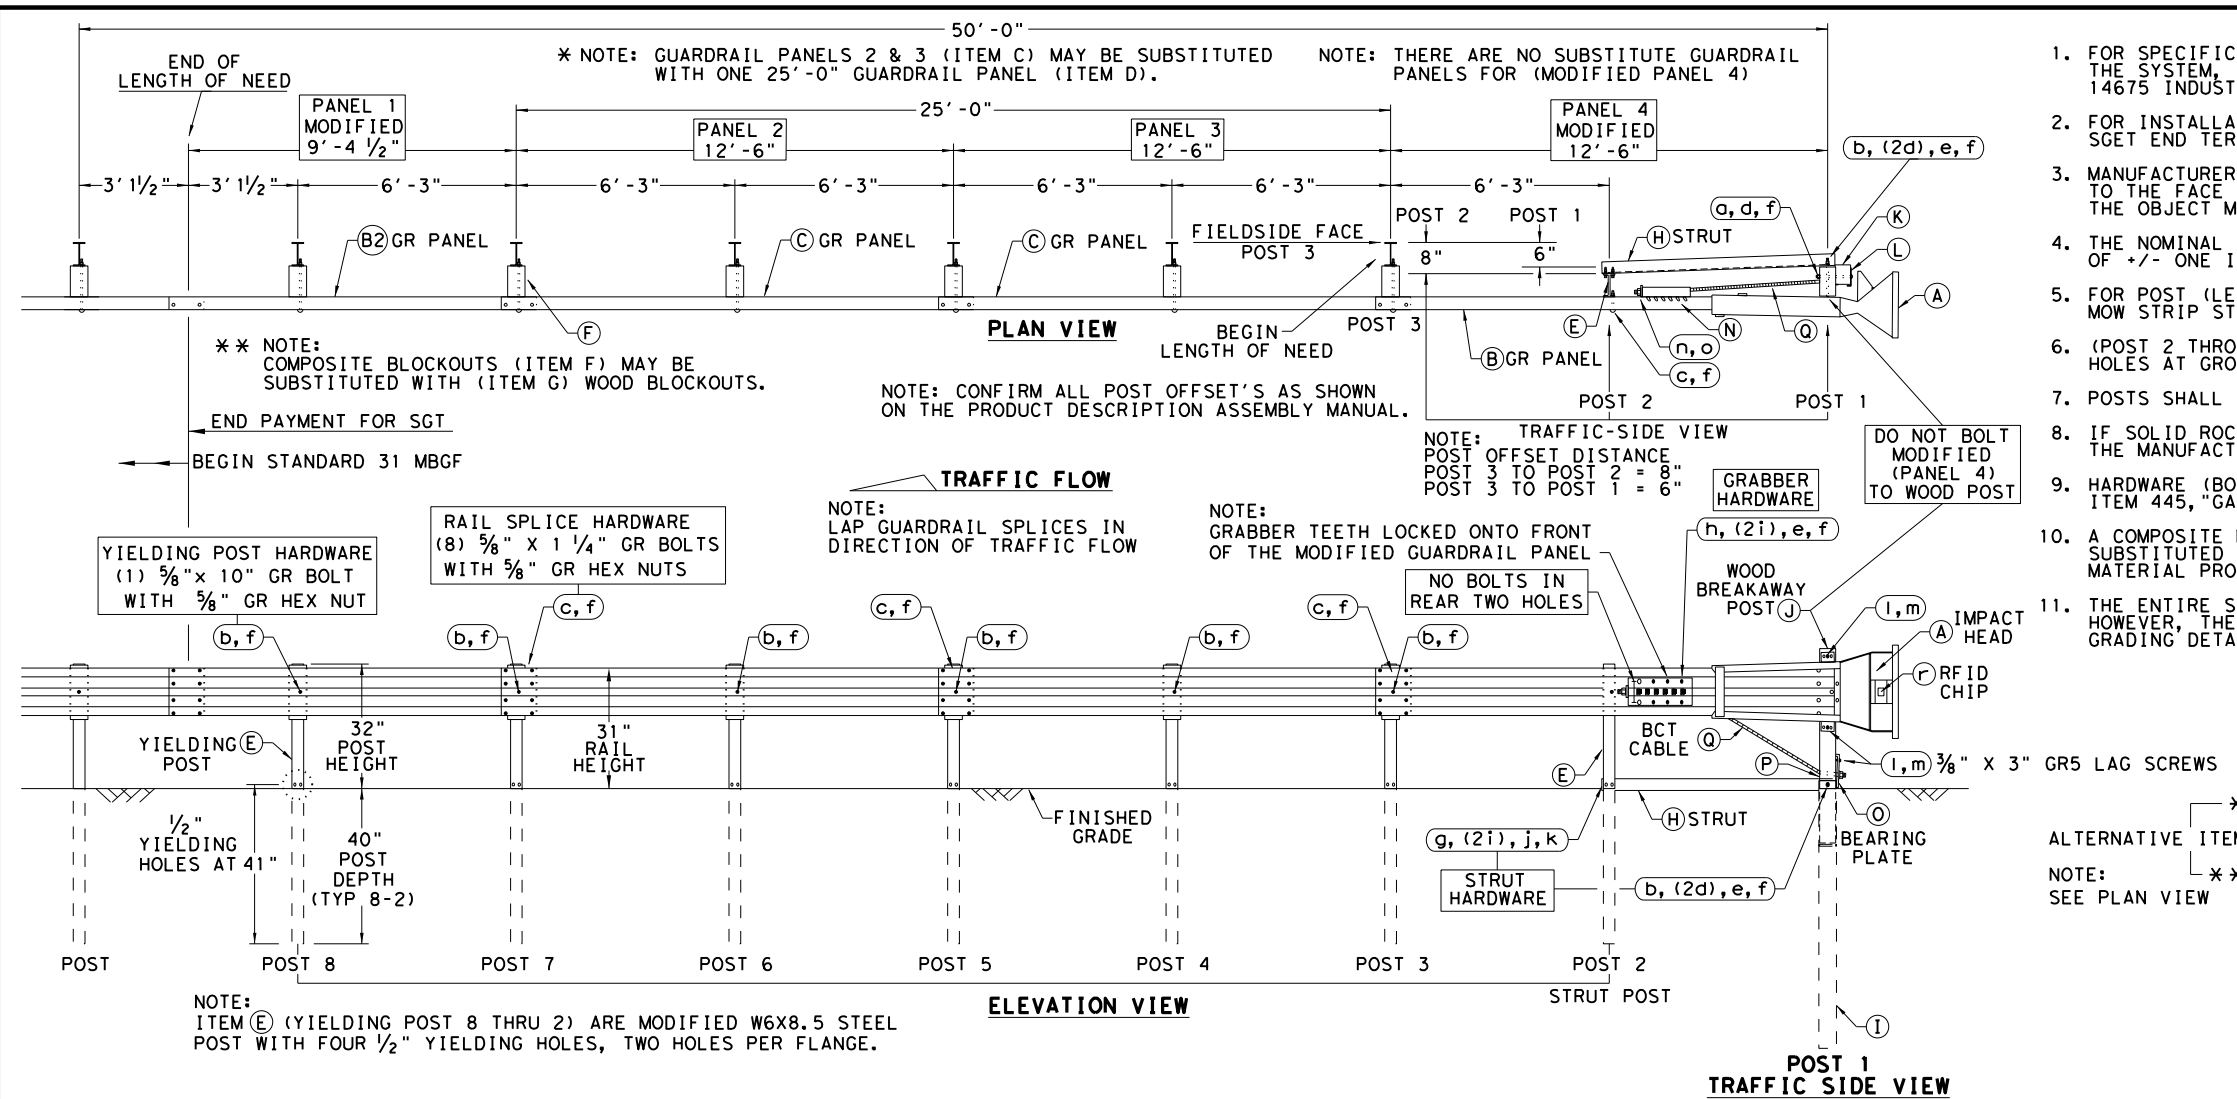

- ### GENERAL NOTES
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: SPIG INDUSTRY, INC. AT 1(267) 644-9510. 14675 INDUSTRIAL PARK RD; BRISTOL, VA 24202
 - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE MANUFACTURER'S; SGET END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL.
 - MANUFACTURER WILL APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" TO THE FACE PLATE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. THE OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
 - THE NOMINAL HEIGHT OF THE GUARDRAIL BEAM IS 31 INCHES WITH A TOLERANCE OF +/- ONE INCH.
 - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
 - (POST 2 THROUGH POST 8) ARE MODIFIED STEEL-YIELDING POSTS WITH YIELDING HOLES AT GROUND LEVEL. THERE ARE NO SUBSTITUTE POSTS.
 - POSTS SHALL NOT BE SET IN CONCRETE.
 - IF SOLID ROCK IS ENCOUNTERED FOR ANY OF THE POSTS IN THE SYSTEM, CONTACT THE MANUFACTURER FOR SPECIFIC INSTALLATION GUIDANCE.
 - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
 - A COMPOSITE MATERIAL BLOCKOUT THAT MEETS DMS-7210 REQUIREMENTS MAY BE SUBSTITUTED FOR AN APPROVED WOOD BLOCKOUT. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
 - THE ENTIRE SYSTEM MUST BE INSTALLED IN A STRAIGHT LINE WITHOUT ANY CURVE. HOWEVER, THE SYSTEM CAN BE OFFSET BY TWO FEET AS SHOWN ON THE APPROACH GRADING DETAIL TO HELP OFF-SET THE IMPACT HEAD FROM SHOULDER OF THE ROAD.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM #
A	1	SGET IMPACT HEAD	SIH1A
B	1	MODIFIED GUARDRAIL PANEL 12'-6" 12GA	126SPZGP
B2	1	MODIFIED GUARDRAIL PANEL 9'-4 1/2" 12GA	GP94
C	2	STANDARD GUARDRAIL PANEL 12'-6" 12GA	GP126
D	1	STANDARD GUARDRAIL PANEL 25'-0" 12GA	GP25
E	7	MODIFIED YIELDING I-BEAM POST W6x8.5	YP6MOD
F	6	COMPOSITE BLOCKOUT 6" X 8" X 14"	CBO8
G	6	WOOD BLOCKOUT 6" X 8" X 14"	WB08
H	1	STRUT 3" X 3" X 80" X 1/4" A36 ANGLE	STR80
I	1	FOUNDATION TUBE 6" X 8" X 72" X 3/8"	FNDT6
J	1	WOOD BREAKAWAY POST 5 1/2" X 7 1/2" X 50"	WBRK50
K	1	WOOD STRIKE BLOCK	WSBK14
L	1	STRIKE PLATE 1/4" A36 BENT PLATE	SPLT8
M	1	REINFORCEMENT PLATE 12 GA. GR55	REPLT17
N	1	GUARDRAIL GRABBER 2 1/2" X 2 1/2" X 16 1/2"	GR17
O	1	BEARING PLATE 8" X 8 5/8" X 5/8" A36	BPLT8
P	1	PIPE SLEEVE 4 1/4" X 2 3/8" O.D. (2 1/8" I.D.)	PSLV4
Q	1	BCT CABLE 3/4" X 81" LENGTH	CBL81
SMALL HARDWARE			
o	1	5/8" X 12" GUARDRAIL BOLT 307A HDG	12GRBLT
b	7	5/8" X 10" GUARDRAIL BOLT 307A HDG	10GRBLT
c	33	5/8" X 1 1/4" GR SPlice BOLTS 307A HDG	1GRBLT
d	3	5/8" FLAT WASHER F436 A325 HDG	58FW436
e	1	5/8" LOCK WASHER HDG	58LW
f	39	5/8" GUARDRAIL HEX NUT HDG	58HN563
g	2	1/2" X 2" STRUT BOLT A325 HDG	2BLT
h	6	1/2" X 1 1/4" PLATE BOLT A325 HDG	125BLT
i	16	1/2" FLAT WASHER F436 A325 HDG	12FWF436
j	8	1/2" LOCK WASHER HDG	12LW
k	8	1/2" HEX NUT A563 HDG	12HN563
l	4	3/8" X 3" HEX LAG SCREW GR5 HDG	38LS
m	4	3/8" FLAT WASHER F436 A325 HDG	38FW844
n	2	1" FLAT WASHER F436 A325 HDG	1FWF436
o	2	1" HEX NUT A563HD HDG	1HN563
p	1	18" TO 24" LONG ZIP TIE RATED 175-200LB	ZPT18
q	1	1 1/2" X 4" SCH-40 PVC PIPE	PSPCR4
r	1	RFID CHIP RATED MIL-STD-810F	RFID810F
s	1	IMPACT HEAD REFLECTIVE SHEETING	RS30M

Texas Department of Transportation
 Design Division Standard

SPIG INDUSTRY, LLC

SINGLE GUARDRAIL TERMINAL

SGET - TL-3 - MASH


SGT (15) 31-20

FILE: sg+153120.dgn	DN: TXDOT	CK: KM	DW: VP	CK: VP
© TXDOT: APRIL 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	090119	176	VARIOUS	
	DIST	COUNTY	SHEET NO.	
	PAR	GRAYSON	66	


NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE SGET TERMINAL SYSTEM AND IS NOT INTENDED TO REPLACE THE MANUFACTURER'S ASSEMBLY MANUAL.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from one format to another.


DATE: 11/2/2022 4:30:03 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\Projects\ADDED\66A_SRR.dgn

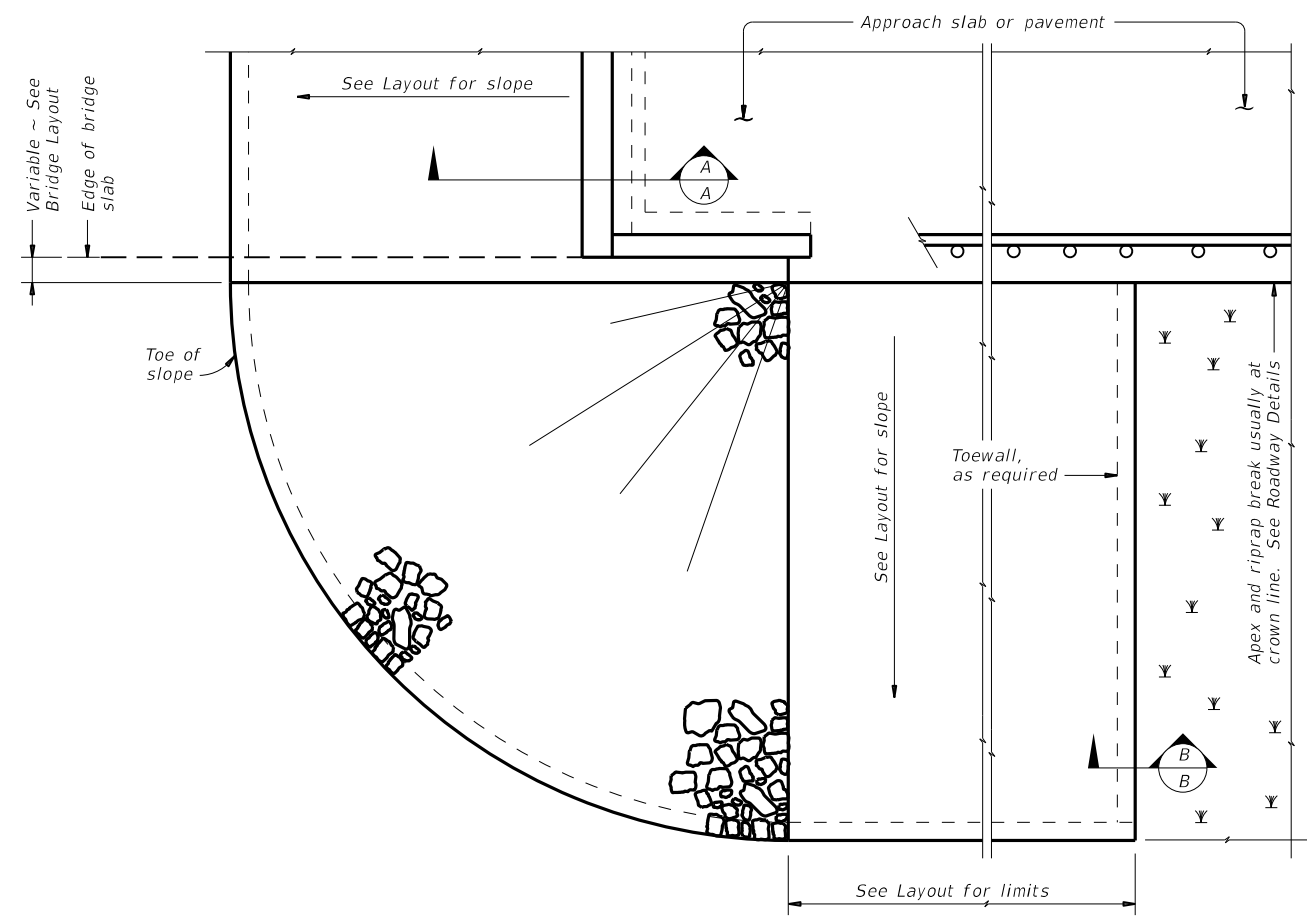


PLAN

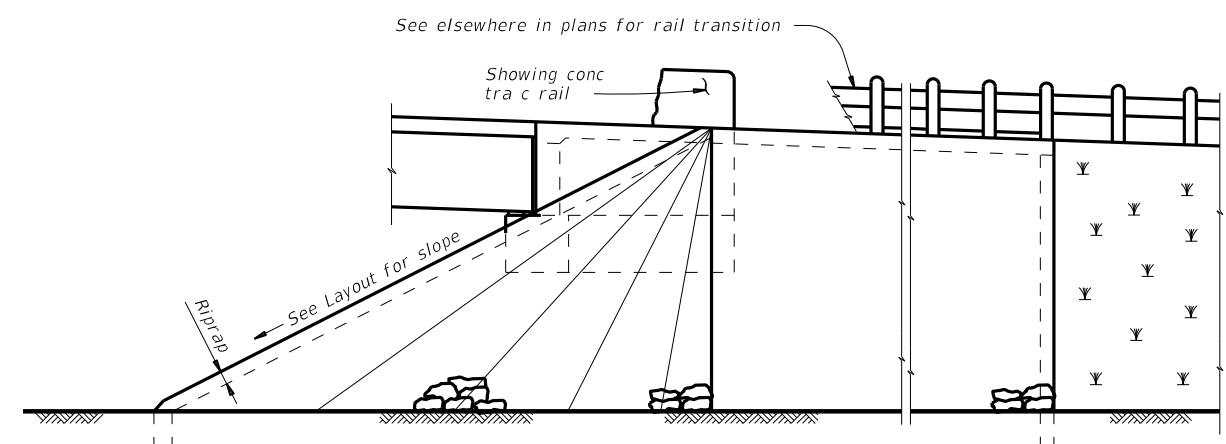

ELEVATION

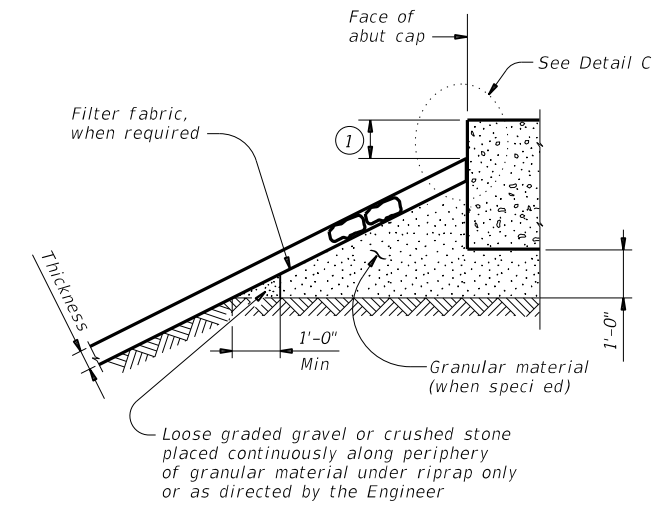


SECTION A-A AT CAP

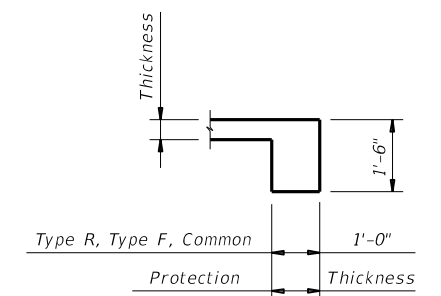

SECTION B-B

Provide toewall when shoulder drain is located adjacent to limits of stone riprap. Omit toewall when thickness of protection riprap is greater than 18".

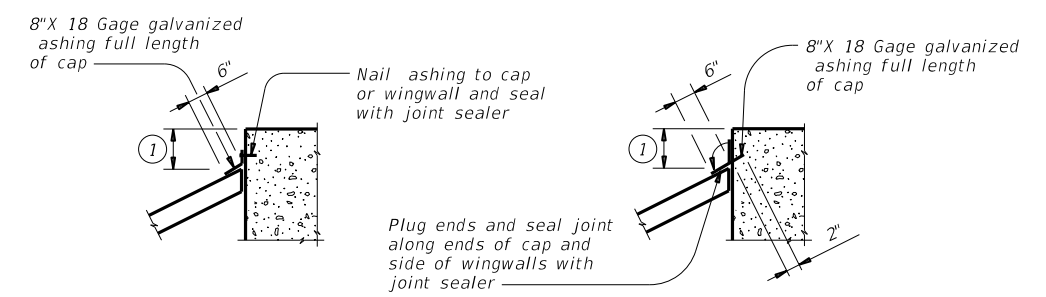

CAP OPTION A

CAP OPTION B

DETAIL C

① Top of cap to top of riprap dimension varies as directed by the Engineer. Provide 9" Min for beam/slab type bridges and 1'-6" for slab span, box beam, or slab beam bridges.

GENERAL NOTES:
 Refer to Item 432, "Riprap" for stone size and gradation, and construction details. See Layout for limits and thickness of riprap specified.
 See elsewhere in plans for locations and details of shoulder drains.

SHEET 1 OF 2

		Bridge Division Standard	
<h1>STONE RIPRAP</h1>			
<h2>SRR</h2>			
FILE: srrstd1-19.dgn	DN: AES	CK: JGD	DW: BWH
©TxDOT April 2019	CONT SECT	JOB	HIGHWAY
REVISIONS	0901 19	176	VARIOUS
DIST	COUNTY	SHEET NO.	
PAR	GRAYSON	66A	

DISCLAIMER:
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of this standard in any project.

DATE: 11/27/2022 4:27:34 PM
FILE: C:\Users\SWALKER\OneDrive\Desktop\Projects\Eisenhower\TPWD parking lot rehab\Projects\ADDED\66A_SRR.dgn

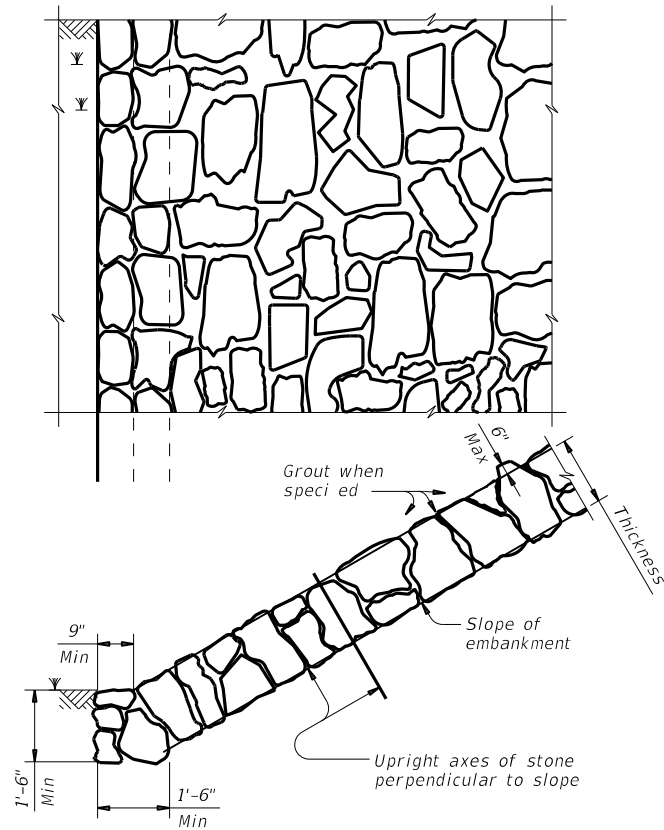


FIGURE 1 ~ TYPE R STONE RIPRAP
dry or grouted

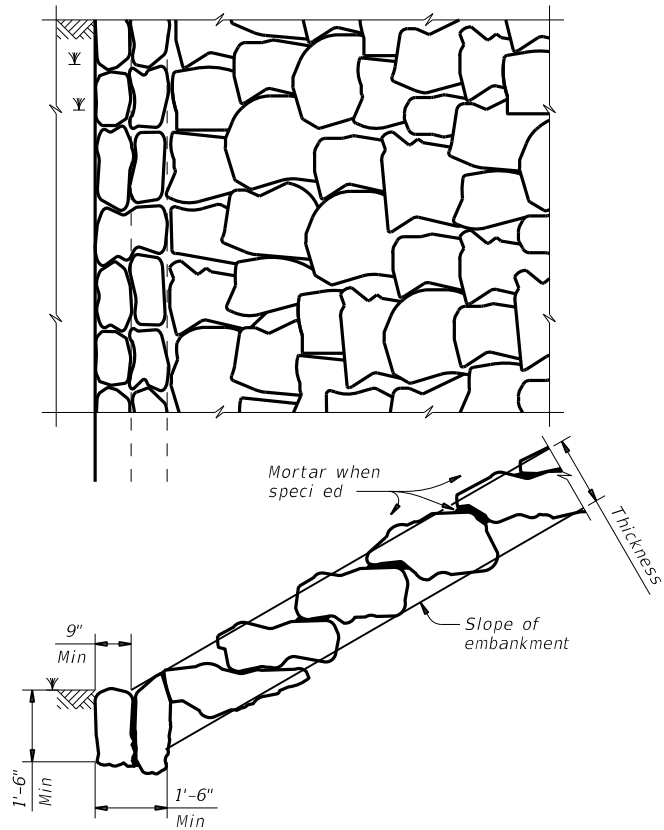


FIGURE 2 ~ TYPE F STONE RIPRAP
dry or mortared



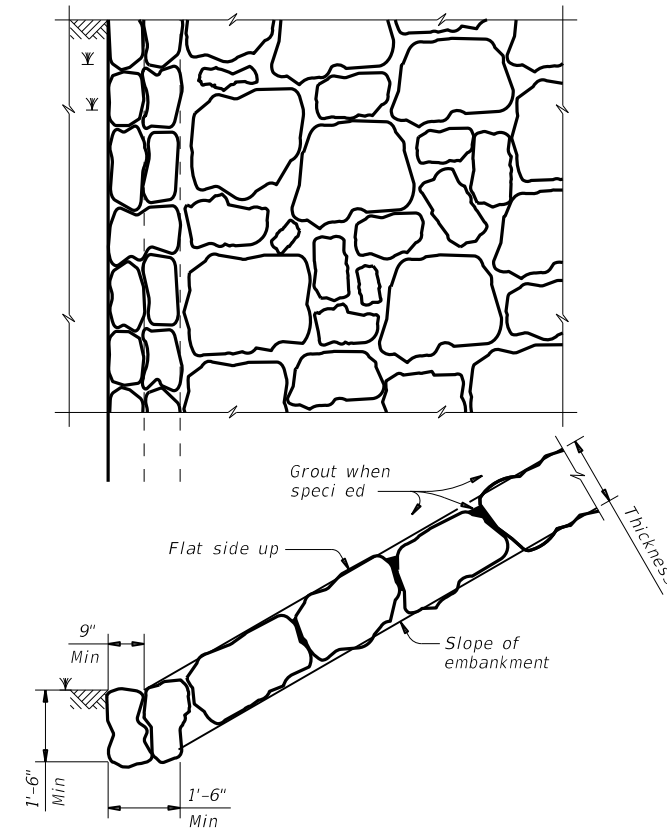


FIGURE 3 ~ TYPE F STONE RIPRAP
grouted

- ② Provide bedding material instead of filter fabric if shown elsewhere in plans. See layout for thickness of bedding material.
- ③ Minimum toe depth is the larger of the maximum scour depth or 2 times the riprap thickness.
- ④ "Y" and Height need to be defined. See layout or detail sheet for values if this option is used.
- ⑤ List Stone Protection as size (XX inch) and thickness (YY inch) on the layout.
Example: Riprap (Stone Protection) XX inch, Thickness = YY inch.

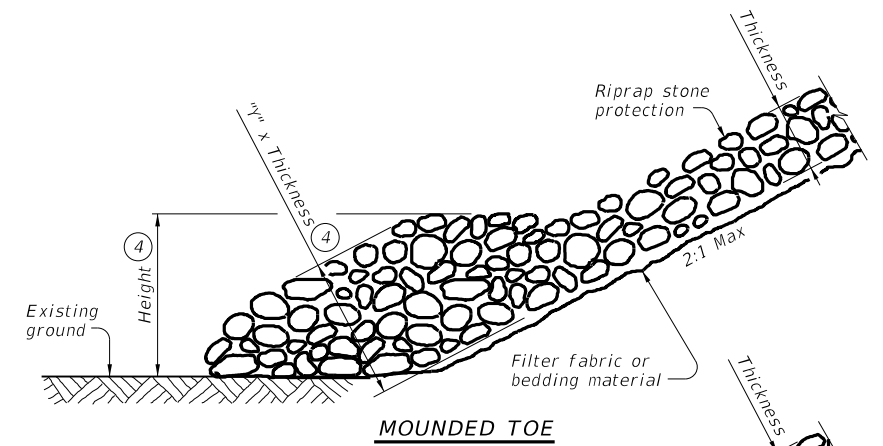

MOUNDED TOE

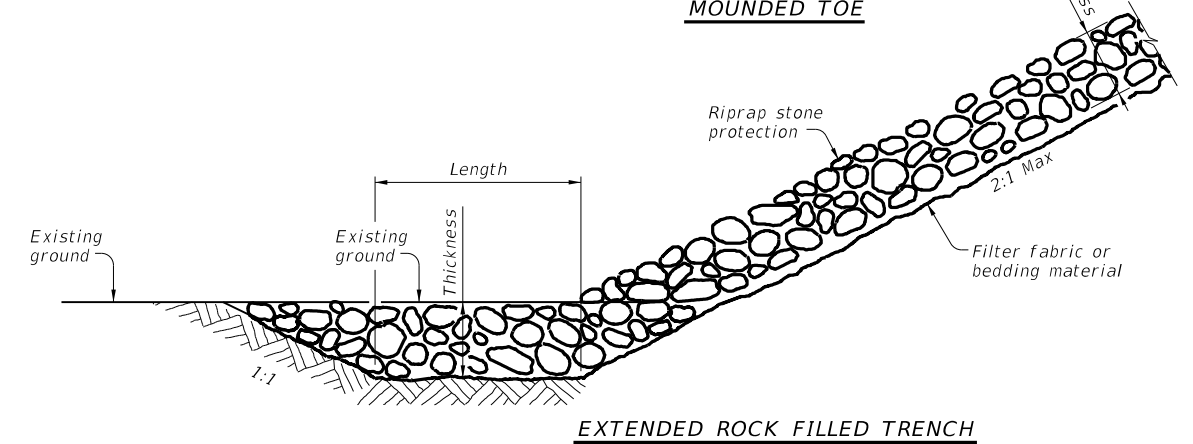

EXTENDED ROCK FILLED TRENCH

PROTECTION STONE RIPRAP TOE OPTIONS ⑤

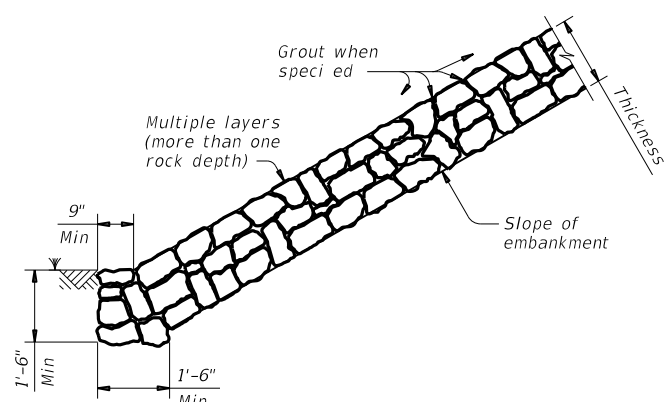
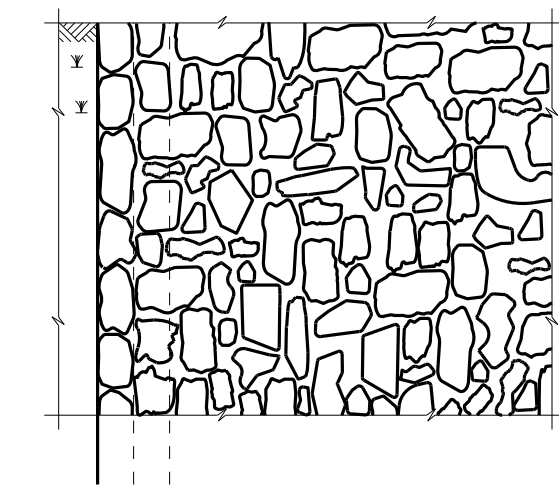


FIGURE 4 ~ COMMON STONE RIPRAP
dry or grouted

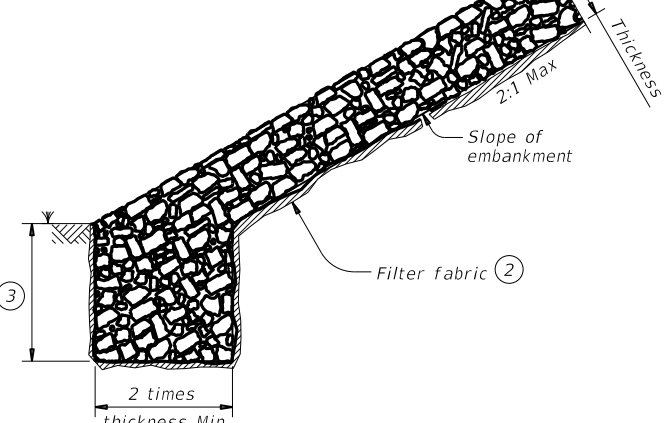
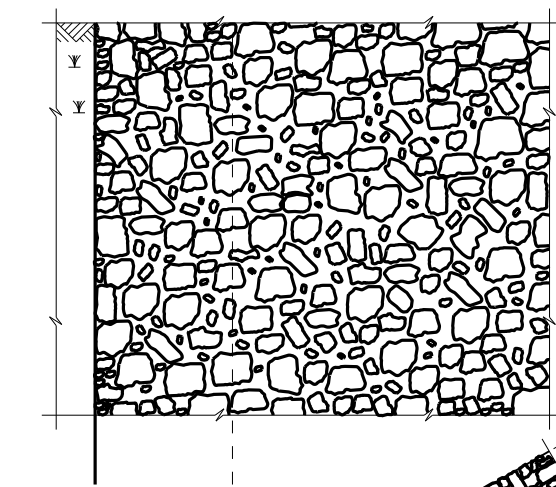


FIGURE 5 ~ PROTECTION STONE RIPRAP ⑤

STONE RIPRAP

SRR

FILE: srrstde1-19.dgn	DN: AES	CK: JGD	DW: BWH	CK: AES
©TxDOT April 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
	DIST	COUNTY	SHEET NO.	
	PAR	GRAYSON	66B	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 11/2/2022 4:22:35 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ 0901-19-176, etc\Submittal\95% Plans\DGNS\067_SMD (GEN)-08.dgn

SIGN SUPPORT DESCRIPTIVE CODES

(Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)

Post Type

FRP = Fiberglass Reinforced Plastic Pipe (see SMD(FRP))
 TWT = Thin-Walled Tubing (see SMD(TWT))
 10BWG = 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3))
 S80 = Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

Number of Posts (1 or 2)


Anchor Type

UA = Universal Anchor - Concreted (see SMD(FRP) and (TWT))
 UB = Universal Anchor - Bolted down (see SMD(FRP) and (TWT))
 WS = Wedge Anchor Steel - (see SMD(TWT))
 WP = Wedge Anchor Plastic (see SMD(TWT))
 SA = Slipbase - Concreted (see SMD(SLIP-1) to (SLIP-3))
 SB = Slipbase - Bolted Down (see SMD(SLIP-1) to (SLIP-3))

Sign Mounting Designation

P = Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))
 T = Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))
 U = Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))
 IF REQUIRED
 1EXT or 2EXT = Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
 BM = Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
 WC = 1.12 #/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))
 EXAL = Extruded Aluminum Sign Panels (see SMD(SLIP-3))


REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT

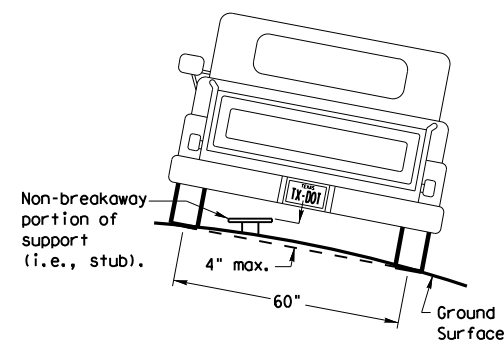

To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheel paths).


SIGN LOCATION

PAVED SHOULDERS

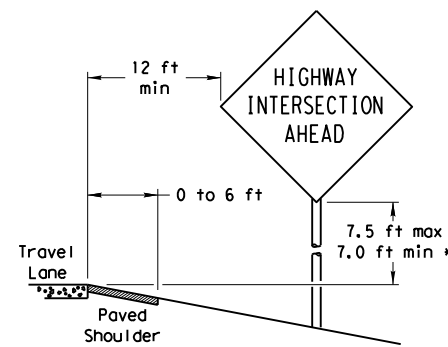

LESS THAN 6 FT. WIDE


When the shoulder is 6 ft. or less in width, the sign must be placed at least 12 ft. from the edge of the travel lane.

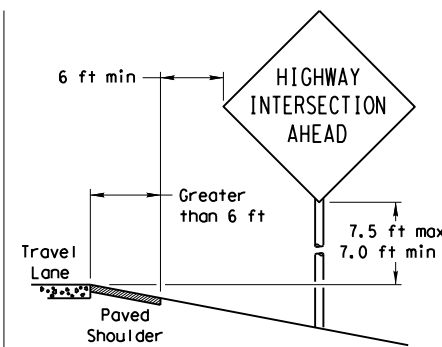

GREATER THAN 6 FT. WIDE


When the shoulder is greater than 6 ft in width, the sign must be placed at least 6 ft. from the edge of the shoulder.

T-INTERSECTION

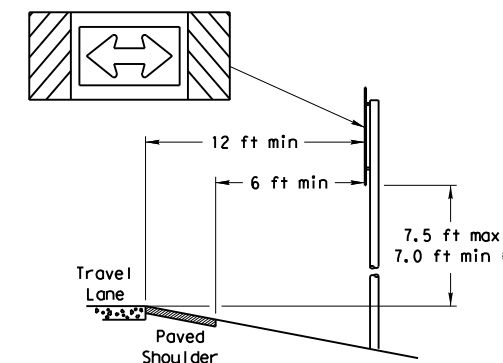


When this sign is needed at the end of a two-lane, two way roadway, the right edge of the sign should be in line with the centerline of the roadway. Place as close to ROW as practical.


No more than 2 sign posts should be located within a 7 ft. circle.

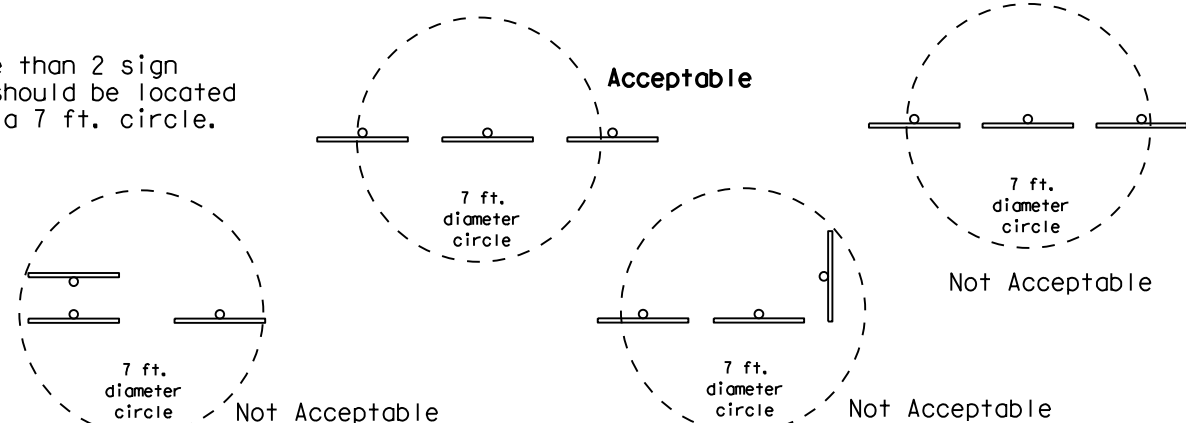

BEHIND BARRIER

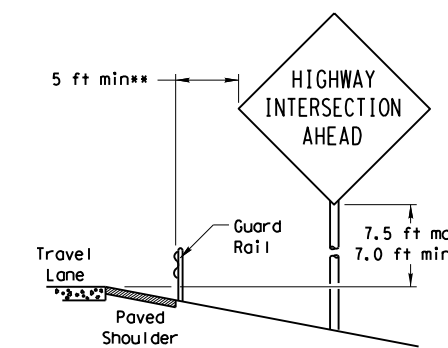


BEHIND GUARDRAIL

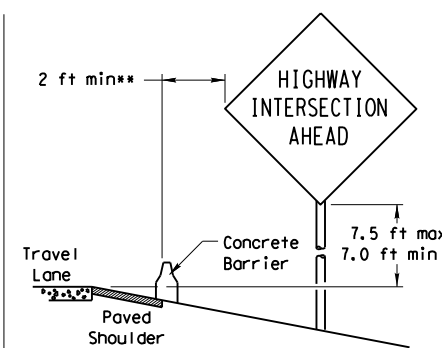

BEHIND CONCRETE BARRIER

**Sign clearance based on distance required for proper guard rail or concrete barrier performance.

TYPICAL SIGN ATTACHMENT DETAIL

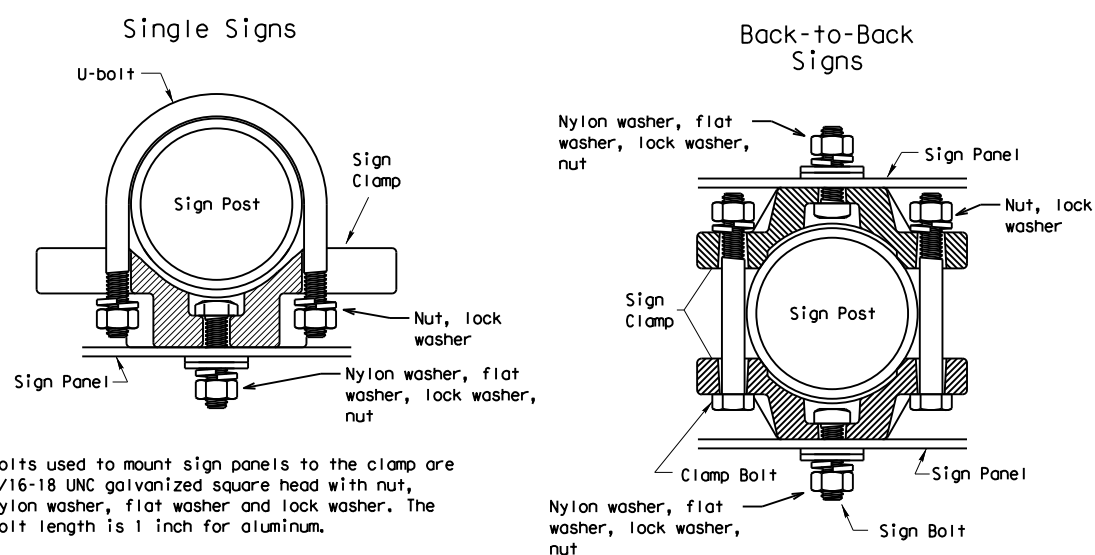


Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.

Sign clamps may be either the specific size clamp or the universal clamp.


Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"

SIGNS WITH PLAQUES

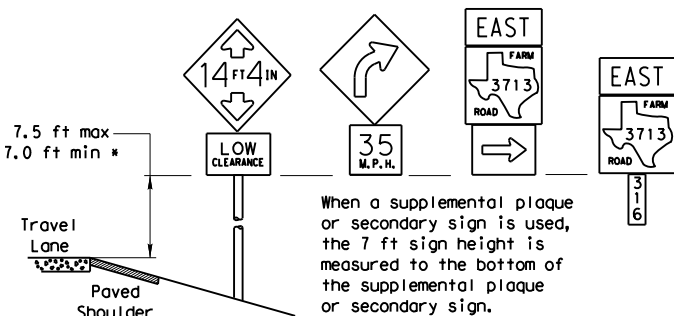


When a supplemental plaque or secondary sign is used, the 7 ft sign height is measured to the bottom of the supplemental plaque or secondary sign.

CURB & GUTTER OR RAISED ISLAND

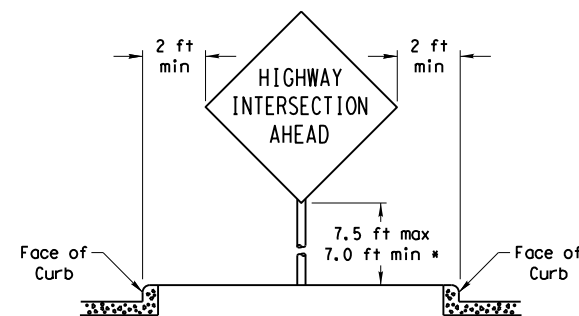


RESTRICTED RIGHT-OF-WAY (When 6 ft min. is not possible.)

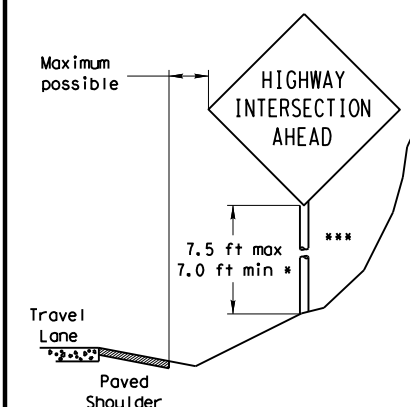

Right-of-way restrictions may be created by rocks, water, vegetation, forest, buildings, a narrow island, or other factors.

In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

*** Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme slope.

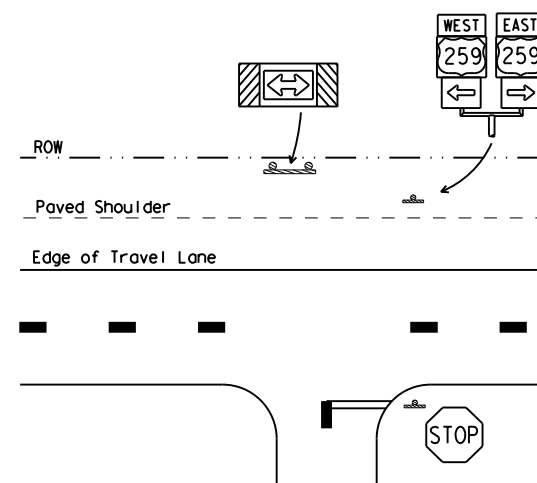

* Signs shall be mounted using the following condition that results in the greatest sign elevation:

- (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
- (2) a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.

The maximum values may be increased when directed by the Engineer.

See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.

The website address is:
<http://www.txdot.gov/publications/traffic.htm>

Texas Department of Transportation
 Traffic Operations Division


SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS GENERAL NOTES & DETAILS

SMD (GEN) - 08

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0901	19	176	VARIOUS
		DIST	COUNTY		SHEET NO.
		PAR	GRAYSON		67

DATE: 11/2/2022 4:22:36 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ 0901-19-176, etc\Submittal\95% Plans\DGNS\068_SMD (SLIP-1)-08.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS

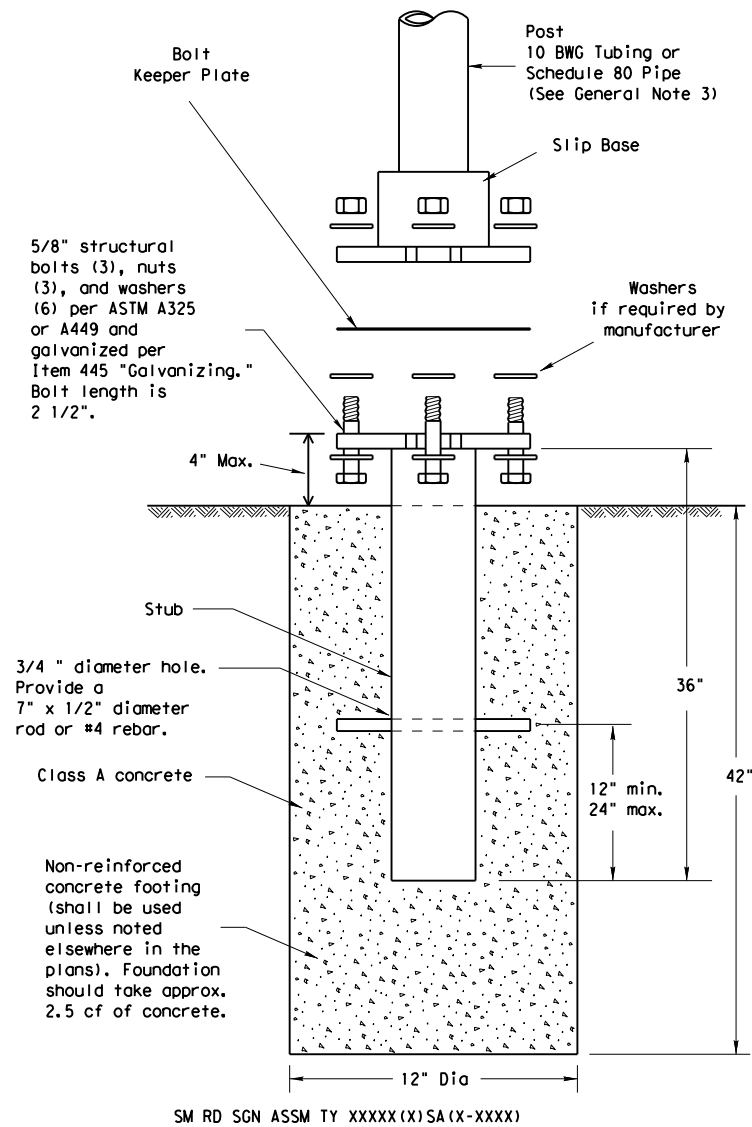

NOTE

There are various devices approved for the Triangular Slipbase System. Please reference the Material Producer List for approved slip base systems. http://www.txdot.gov/business/producer_list.htm
 The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.

GENERAL NOTES:

- Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- Material used as post with this system shall conform to the following specifications:
 - 10 BWG Tubing (2.875" outside diameter)
 - 0.134" nominal wall thickness
 - Seamless or electric-resistance welded steel tubing or pipe
 - Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
 - Other steels may be used if they meet the following:
 - 55,000 PSI minimum yield strength
 - 70,000 PSI minimum tensile strength
 - 20% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"
 - Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"
 - Galvanization per ASTM A123 or ASTM A653 G210. For precoated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
 - Schedule 80 Pipe (2.875" outside diameter)
 - 0.276" nominal wall thickness
 - Steel tubing per ASTM A500 Gr C
 - Other seamless or electric-resistance welded steel tubing or pipe with equivalent outside diameter and wall thickness may be used if they meet the following:
 - 46,000 PSI minimum yield strength
 - 62,000 PSI minimum tensile strength
 - 21% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.248" to 0.304"
 - Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"
 - Galvanization per ASTM A123
- See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.

ASSEMBLY PROCEDURE


Foundation

- Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
- Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
- The triangular slipbase system is multidirectional and is designed to release when struck from any direction.

Support

- Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and straight.
- Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD(SLIP-2) for clearances based on sign types.

CONCRETE ANCHOR

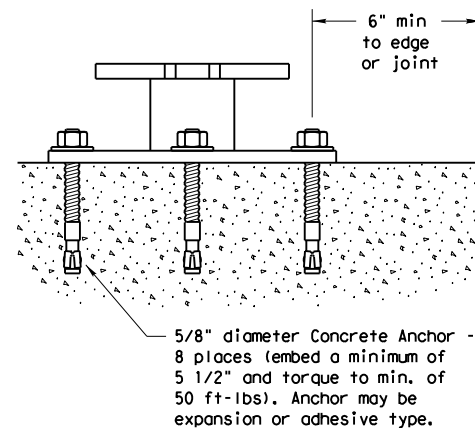

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.


















SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS TRIANGULAR SLIPBASE SYSTEM

SMD(SLIP-1)-08

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT	
9-08	REVISIONS		CONT	SECT	JOB	HIGHWAY
			0901	19	176	VARIOUS
	DIST	COUNTY	PAR	GRAYSON		SHEET NO. 68

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 11/2/2022 4:22:36 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ 0901-19-176, etc\Submittal\95% Plans\DGNS\069_SMD (SLIP-2)-08.dgn

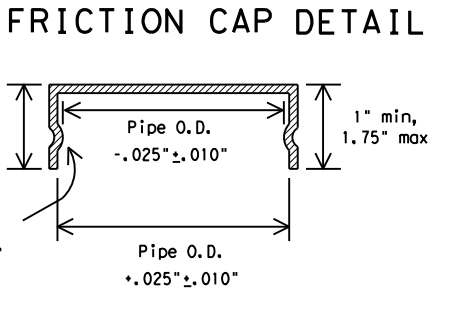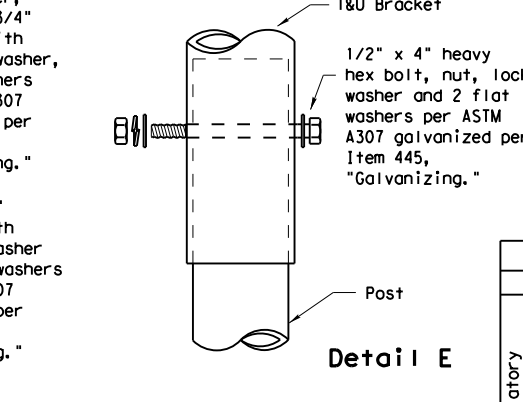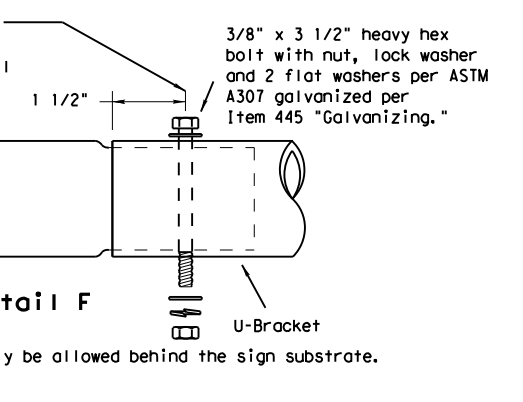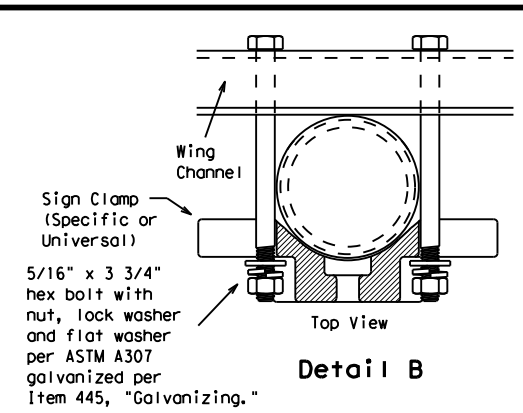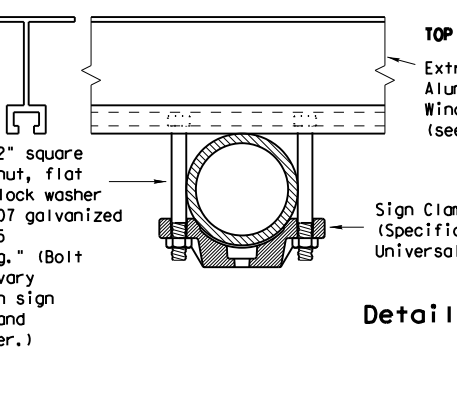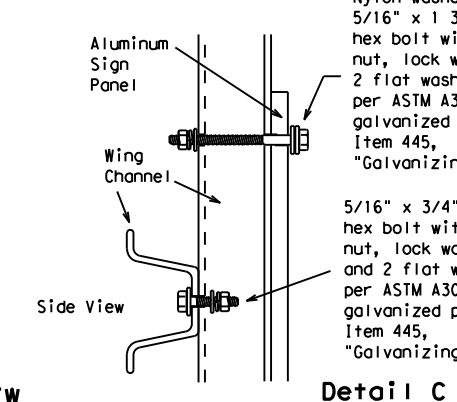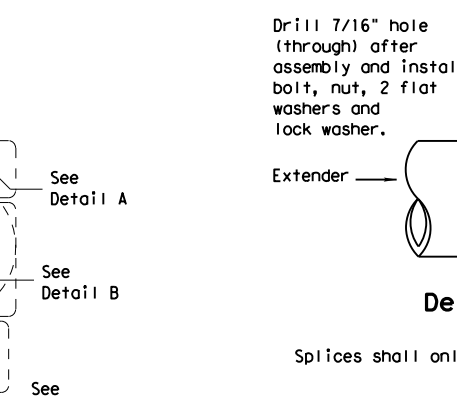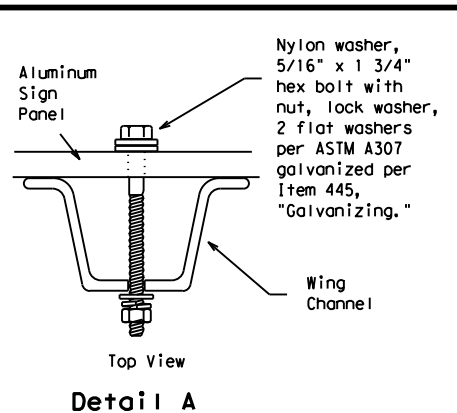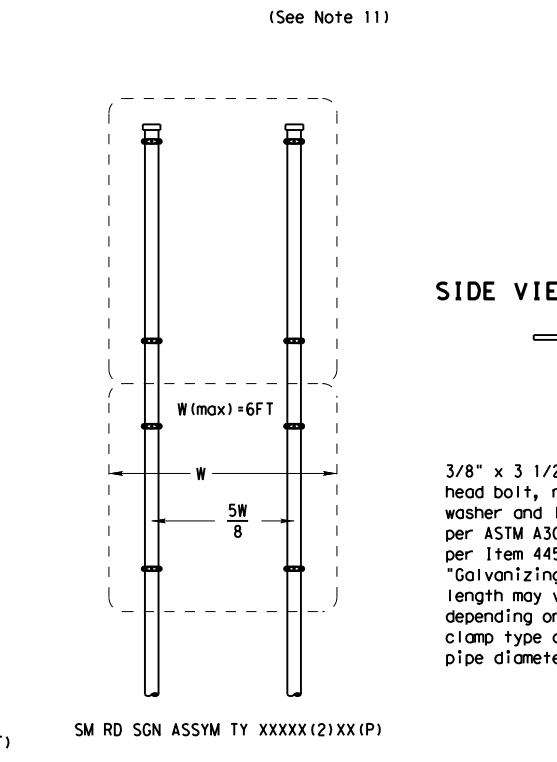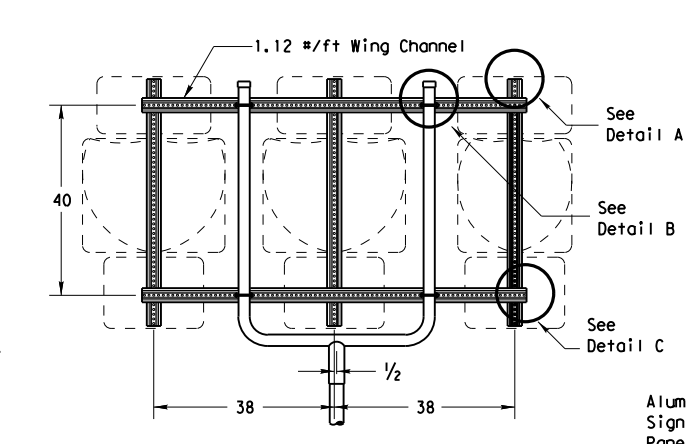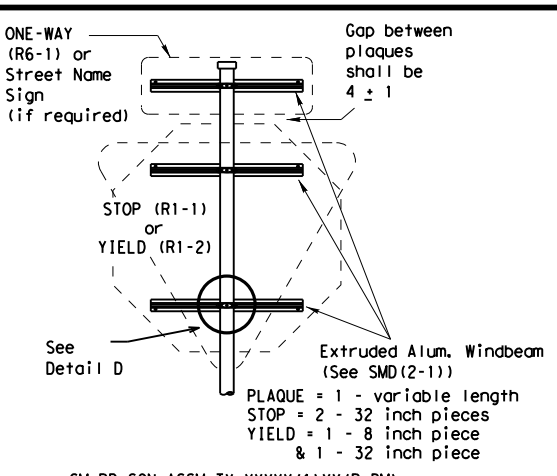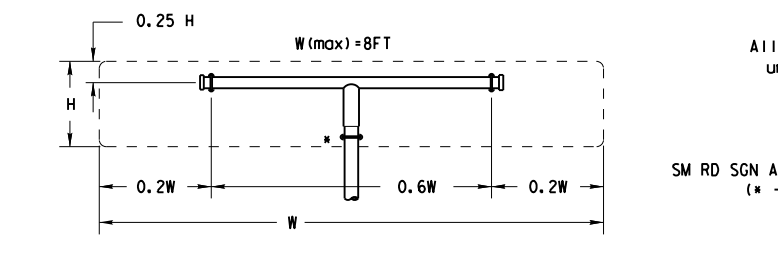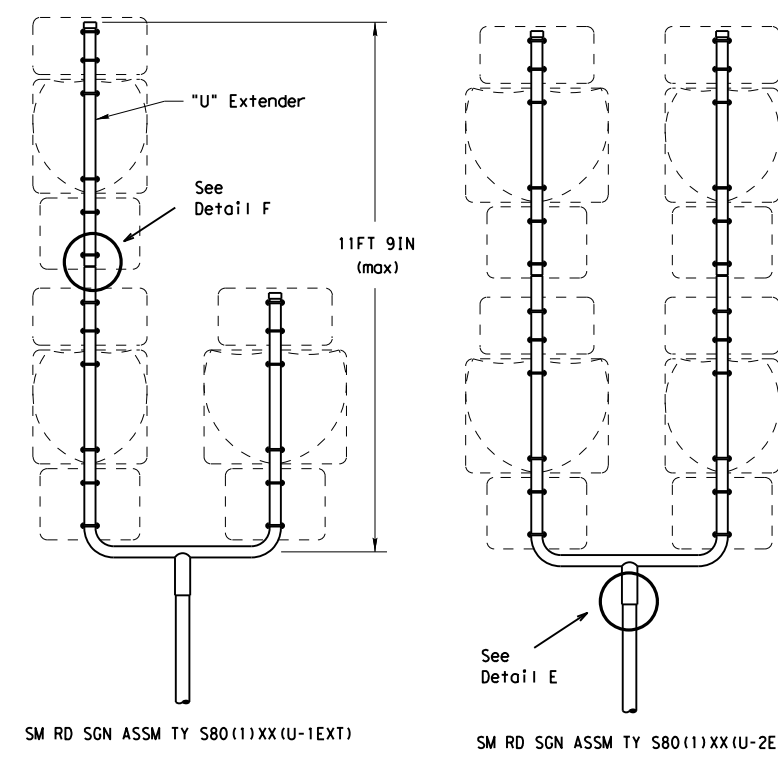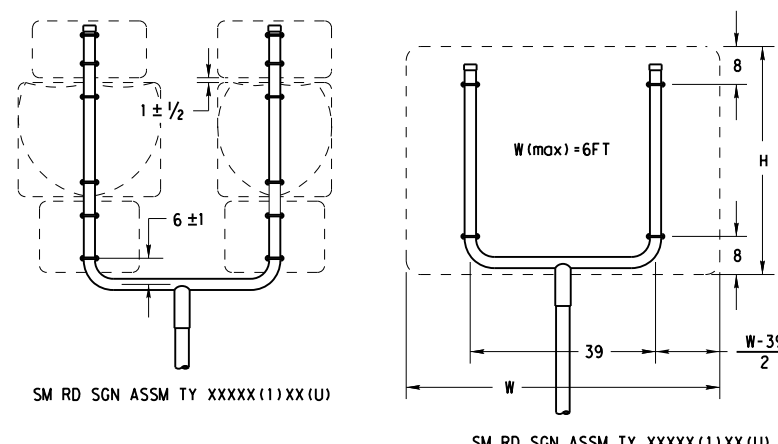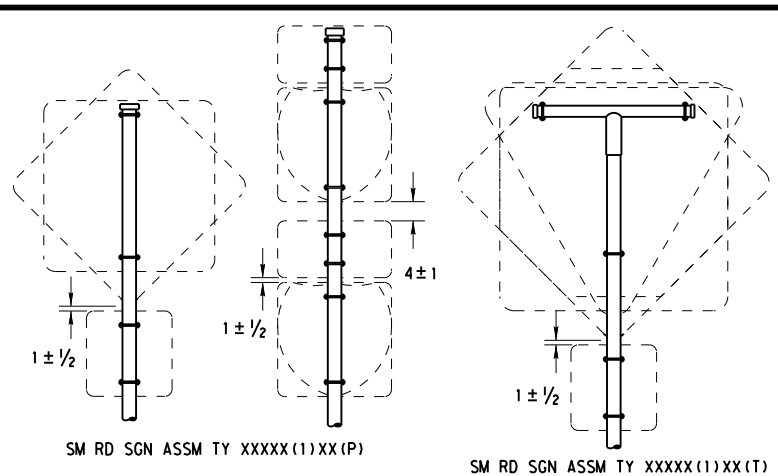

All dimensions are in english unless detailed otherwise.

SM RD SGN ASSM TY XXXX(1)XX(T) (* - See Note 12)

GENERAL NOTES:

1. SIGN SUPPORT # OF POSTS MAX. SIGN AREA

10 BWG	1	16 SF
10 BWG	2	32 SF
Sch 80	1	32 SF
Sch 80	2	64 SF
2. The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
3. Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
4. Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
5. Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
6. For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
7. When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
8. Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
9. Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
10. Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
11. Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
12. Post open ends shall be fitted with Friction Caps.
13. Sign blanks shall be the sizes and shapes shown on the plans.

REQUIRED SUPPORT		
SIGN DESCRIPTION	SUPPORT	
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
Warning	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)	
Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)	

Friction caps may be manufactured from hot rolled or cold rolled steel sheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes. The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture. Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.




**SIGN MOUNTING DETAILS
 SMALL ROADSIDE SIGNS
 TRIANGULAR SLIPBASE SYSTEM
 SMD(SLIP-2)-08**


© TxDOT July 2002	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
9-08	CON: 0901	SECT: 19	JOB: 176	HIGHWAY: VARIOUS
	DIST: PAR	COUNTY: GRAYSON	SHEET NO. 69	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 11/2/2022 4:27:34 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects\CSJ 0901-19-176, etc\Submittal\95% Plans\SGNs\ADDED\69A_SMD (TWT) -08.dgn


Wedge Anchor Steel System

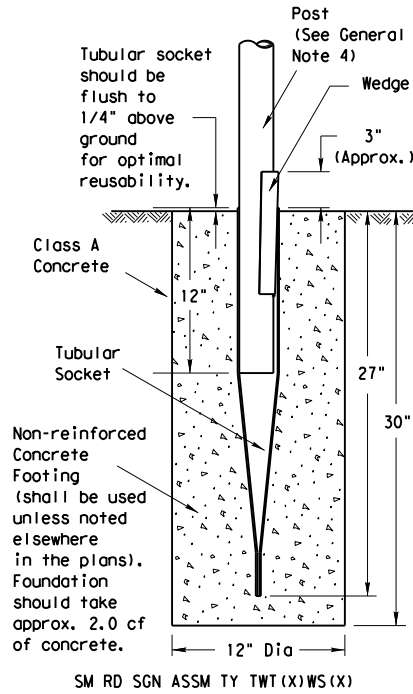


Wedge Anchor High Density Polyethylene (HDPE) System

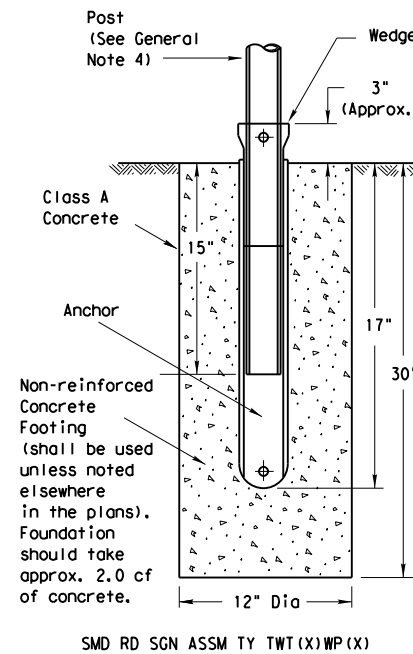

Universal Anchor System with Thin-Walled Tubing Post

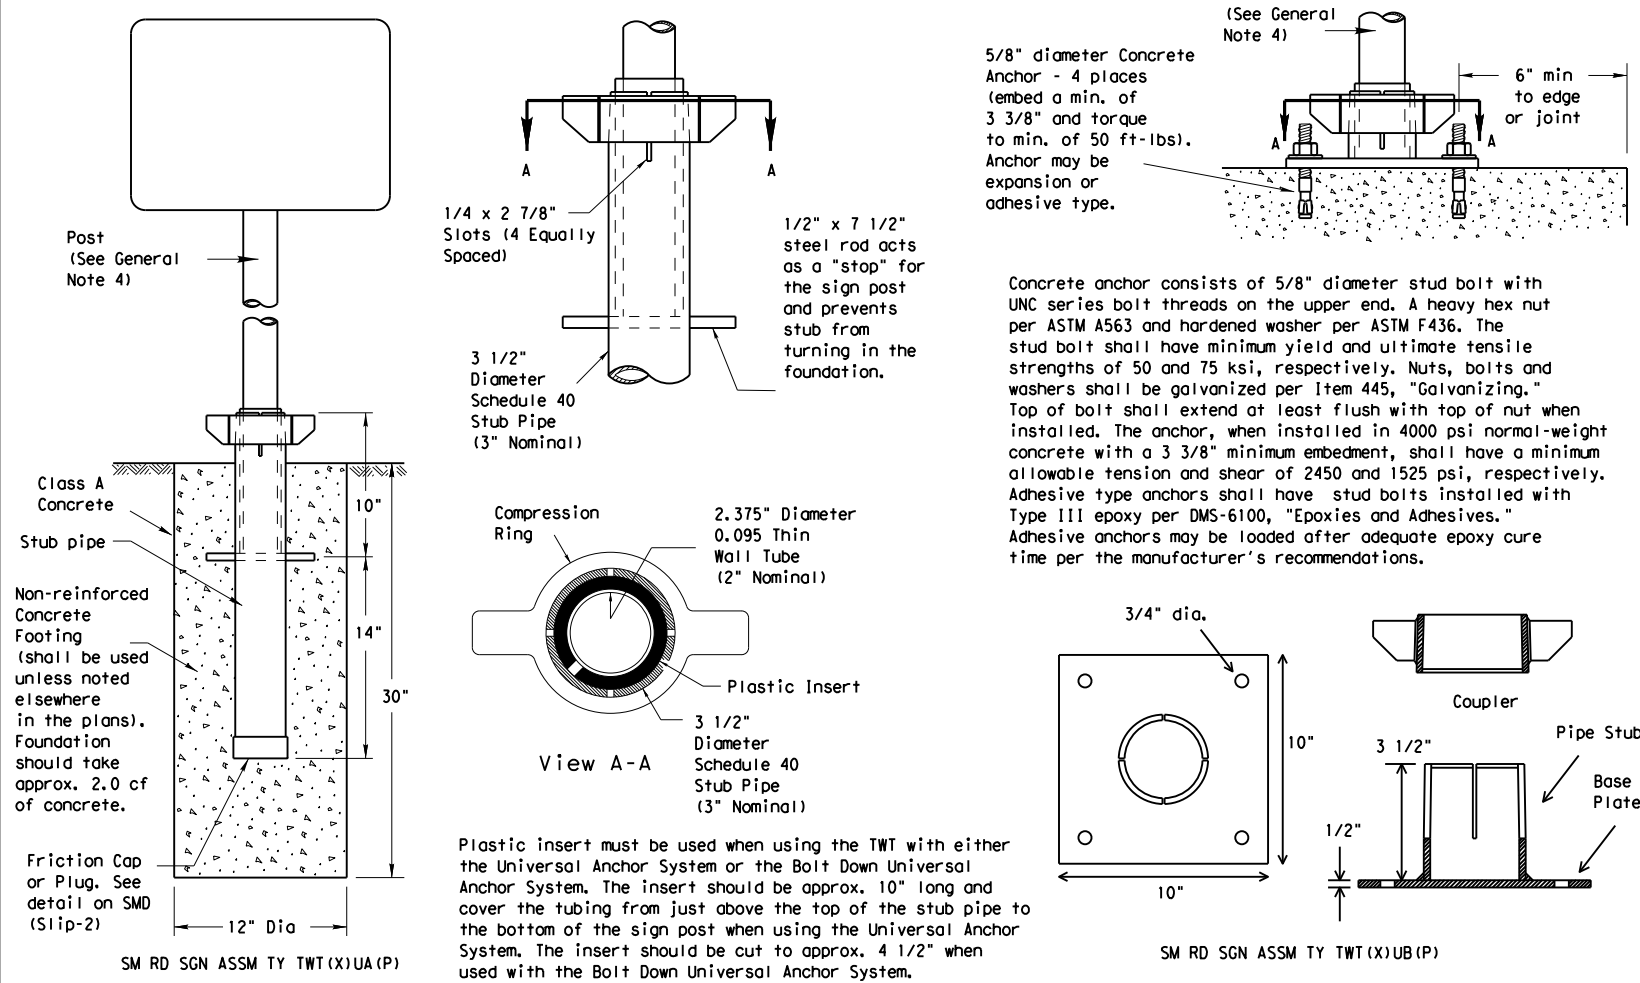

Sign Installation Using a Prefabricated T-Bracket for Thin-Wall Tubing Post

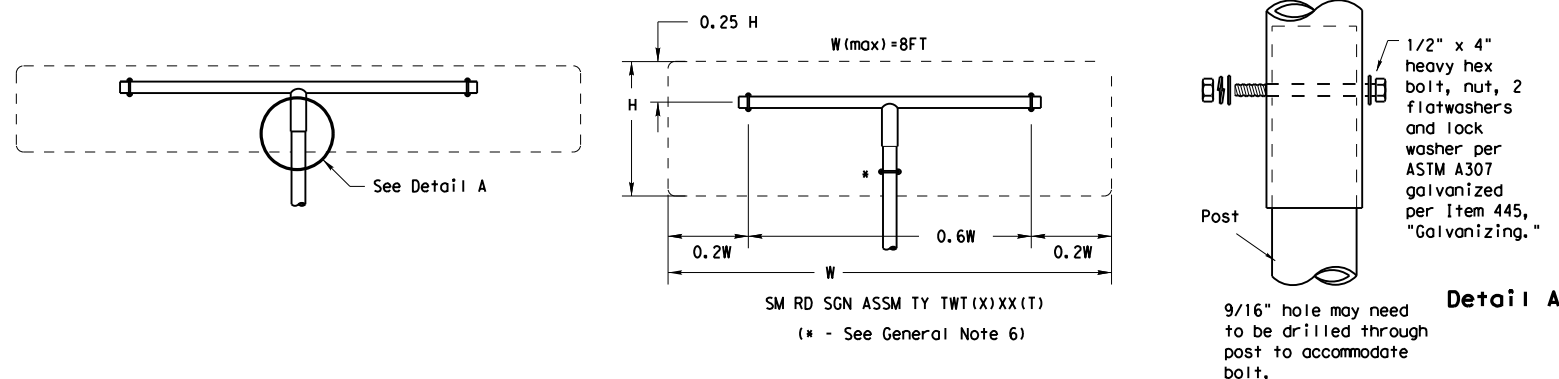

NOTE
 The devices shall be installed per manufacturer's recommendations. Installation procedures shall be provided to the Engineer by Contractor.

GENERAL NOTES:

- The Wedge Anchor System and the Universal Anchor System with thin wall tubing post may be used to support up to 10 square feet of sign area.
- The tubular socket, wedge and prefabricated T-bracket shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to the approval of the TxDOT Traffic Standards Engineer.
- Except for posts (13 BWG Tubing), clamps, nuts and bolts, all components shall be prequalified. A list of prequalified vendors may be obtained from the Material Producer List web page. The website address is: http://www.txdot.gov/business/producer_list.htm
- Material used as post with this system shall conform to the following specifications:
 13 BWG Tubing (2.375" outside diameter) (TWT)
 0.095" nominal wall thickness
 Seamless or electric-resistance welded steel tubing
 Steel shall be HSLA Gr 55 per ASTM A1011 or ASTM A1008
 Other steels may be used if they meet the following:
 55,000 PSI minimum yield strength
 70,000 PSI minimum tensile strength
 18% minimum elongation in 2"
 Wall thickness (uncoated) shall be within the range of .083" to .099"
 Outside diameter (uncoated) shall be within the range of 2.369" to 2.381"
 Galvanization per ASTM 123 or ASTM A653 G210. For precoated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24" high signs. Place clamp at least 3" above bottom of sign when possible.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- See the Traffic Operations Division website for detailed drawings of sign clamps and Wedge Anchor System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>

WEDGE ANCHOR SYSTEM INSTALLATION PROCEDURE

- Dig foundation hole. Where solid rock is encountered at ground level, the foundation shall be a minimum depth of 18". When solid rock is encountered below ground level, the foundation shall extend in the solid rock a minimum depth of 18" or provide a minimum foundation depth of 30". If solid rock is encountered, the socket/stub may be reduced in length as required to a minimum length of 18". Any material removed from the socket/stub shall be from the bottom and the clearance requirements given on SMD(GEN) must be followed. The inner surfaces of the socket/stub must remain free of concrete or other debris.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Place concrete into hole until it is approximately flush with the ground. Concrete shall be Class A.
- Insert tubular socket into concrete until top of socket is approximately 1/4" above the concrete footing.
- Plumb the socket. Allow a minimum 4 days for concrete to set, unless otherwise directed by Engineer.
- Attach the sign to the sign post.
- Insert the sign post into socket and align sign face with roadway.
- Drive the wedge into the socket to secure post. This will leave approximately 3 inches of the wedge exposed.

UNIVERSAL ANCHOR SYSTEM INSTALLATION PROCEDURE

- Dig foundation hole. Where solid rock is encountered at ground level, the foundation shall be a minimum depth of 18". When solid rock is encountered below ground level, the foundation shall extend in the solid rock a minimum depth of 18" or provide a minimum foundation depth of 30". If solid rock is encountered, the socket/stub may be reduced in length as required to a minimum length of 18". Any material removed from the socket/stub shall be from the bottom and the clearance requirements given on SMD(GEN) must be followed. The inner surfaces of the socket/stub must remain free of concrete or other debris.
- Insert base post in hole to depths shown and backfill hole with concrete.
- Level and plumb the base post using a torpedo level and allow concrete adequate time to set. The bottom of the slots provided in the stub pipe shall remain above the top of the concrete foundation.
- Attach the sign to the sign post.
- Install plastic insert around bottom of post.
- Insert sign post into base post. Lower until the post comes to rest on steel rod.
- Seat compression ring using a hammer. Typically, the top of compression ring will be approximately level with top of stub post when optimally installed.
- Check sign post by hand to ensure it is unable to turn. If loose, increase the tightening of the compression ring.

Texas Department of Transportation
 Traffic Operations Division

**SIGN MOUNTING DETAILS
 SMALL ROADSIDE SIGNS
 WEDGE & UNIVERSAL ANCHOR
 WITH THIN WALL TUBING POST
 SMD (TWT) -08**

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0901	19	176	VARIOUS
		DIST	COUNTY	SHEET NO.	
		PAR	GRAYSON	69A	

DATE: 11/2/2022 4:22:37 PM
 FILE: C:\Users\SWALKER\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-18-19\09-18-19.dwg
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the use of the standard in any other way than that intended for its use.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS				DELINEATORS				D & OM DESCRIPTIVE CODES	
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	DEVICE	SINGLE	DOUBLE	INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX(XX)	
								NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRFL = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount DIRECTION If Required BI = Bi-Directional BR = Bi-Directional with red on back	
SHEETING	Yellow, White or Red Type B or C reflective sheeting				SHEETING	Yellow, White or Red Type B or C Reflective Sheeting			
NOTE	1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (fix). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.				POST TYPE	WC	YFLX, WFLX	WC	YFLX, WFLX
					MOUNT TYPE	GND	GND, SRF	GND	GND, SRF

OBJECT MARKERS										D & OM DESCRIPTIVE CODES		
DEVICE	Type 1 (OM-1)		Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)		INSTL OM ASSM (OM-XX) (XXXX)XXX(XX)	
		OM-1		OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4	TYPE OF OBJECT MARKER 1, 2, 3, or 4 NUMBER OF REFLECTORS OR DIRECTION X = 3-Size 2 reflector units (Type 2 only) Y = 1-Size 3 reflector unit (Type 2 only) Z = 3-Size 1 or 1-Size 4 reflector unit(s) (Type 2 only) L = Left Side (Type 3 Object Marker only) R = Right Side (Type 3 Object Marker only) C = Center (Type 3 Object Marker only) TYPE OF POST WC = Wing Channel Post WFLX = White Flexible Post TWT = Thin Walled Tubing TYPE OF MOUNT GND = Embedded (drivable) SRF = Surface Mount WAS = Wedge Anchor Steel WAP = Wedge Anchor Plastic DIRECTION If Required BI = Bi-Directional	
										DEPARTMENTAL MATERIAL SPECIFICATIONS FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES) DMS-4400 SIGN FACE MATERIALS DMS-8300 DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS DMS-8600		
SHEETING	Yellow-Type B _{FL} or C _{FL} Sheeting		Yellow - Type B or C Sheeting			Alternating acrylic black and retroreflective yellow - Type B _{FL} or C _{FL} Sheeting			Red -Type B _{FL} or C _{FL} Sheeting			
POST TYPE	TWT		WC	WC	WFLX	TWT			TWT			
MOUNT TYPE	WAS, WAP		GND	GND	GND, SRF	WAS, WAP			WAS, WAP			

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE:		
DEVICE	GF1	GF2	CTB	W1-8				W1-6		Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.	
				SIZE (W x L)	18"x 24" (Conventional)	24"x 30" (Conventional Oversize)	30"x 36" (Expressway)	36" x 48" (Freeway)	SIZE (W x L)		48" x 24" (Conventional)
	1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			MOUNTING HEIGHT	4'-0" or 7'-0"		7'-0" Only		MOUNTING HEIGHT	7'-0"	
				NOTE	1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).						
SHEETING	Yellow, White, Red										
NOTE	1. Reflective sheeting shall have a minimum dimension of 3 inches and minimum surface area of 9 square inches.										

Texas Department of Transportation
 Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION












D & OM(1)-20


FILE: dom1-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	PAR	GRAYSON	70	

20A

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of the standard for any purpose other than that for which it was originally intended.

DATE: 11/2/2022 4:22:37 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-01-19\090119-176\090119-176.dwg

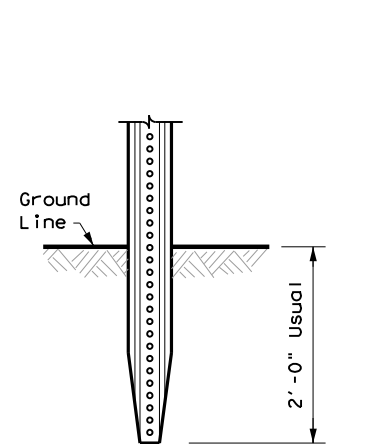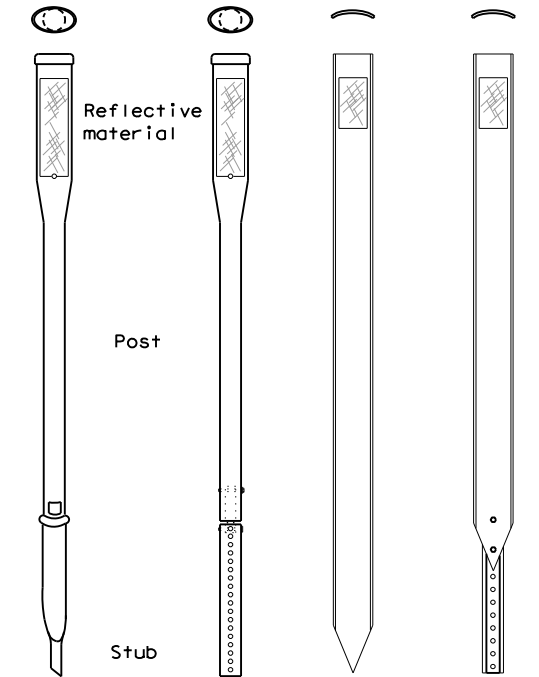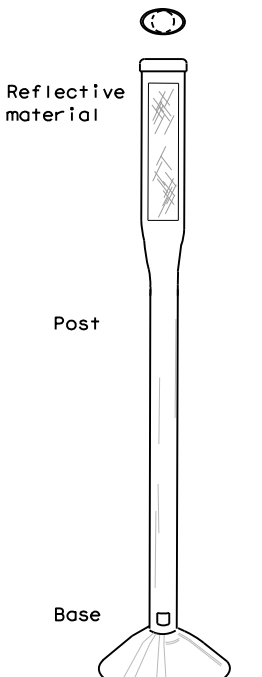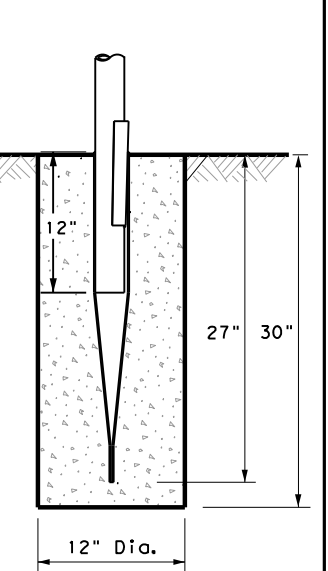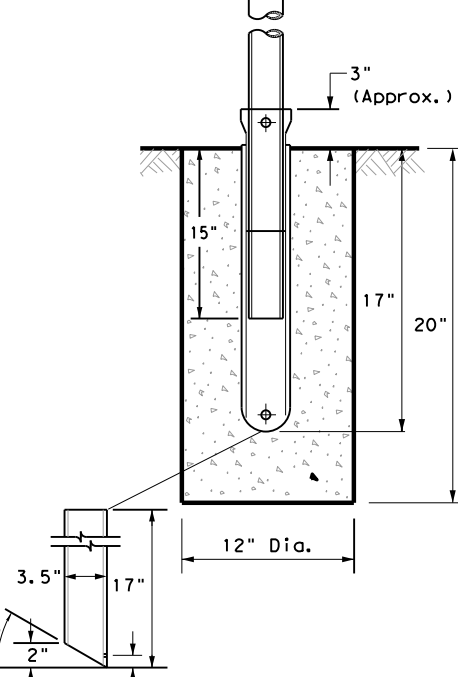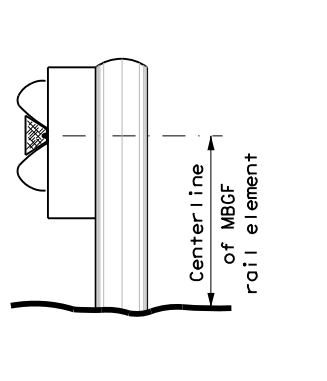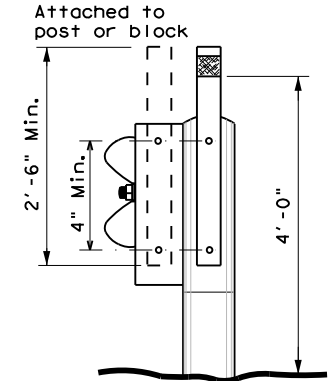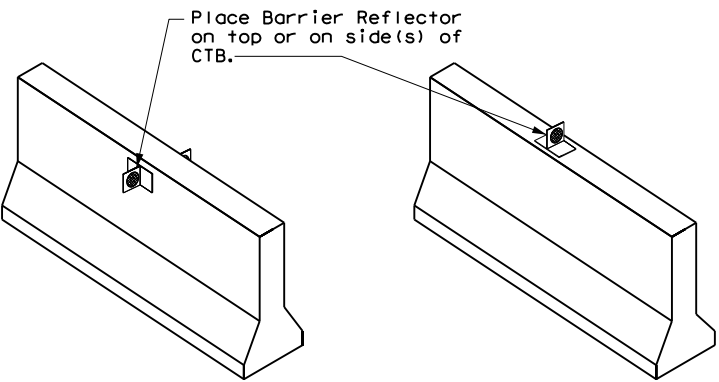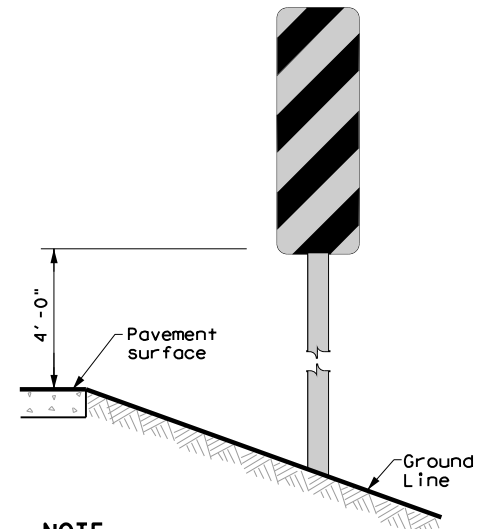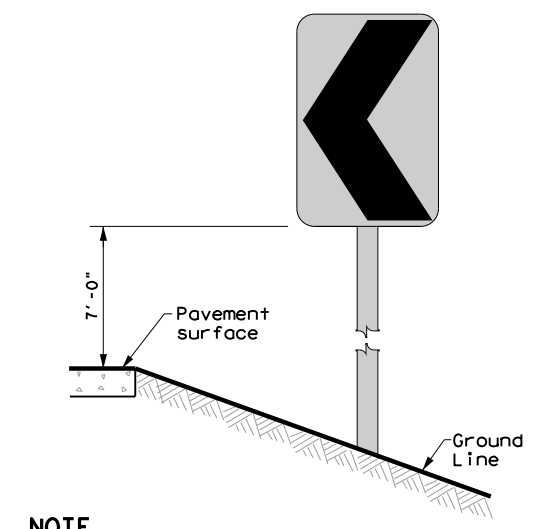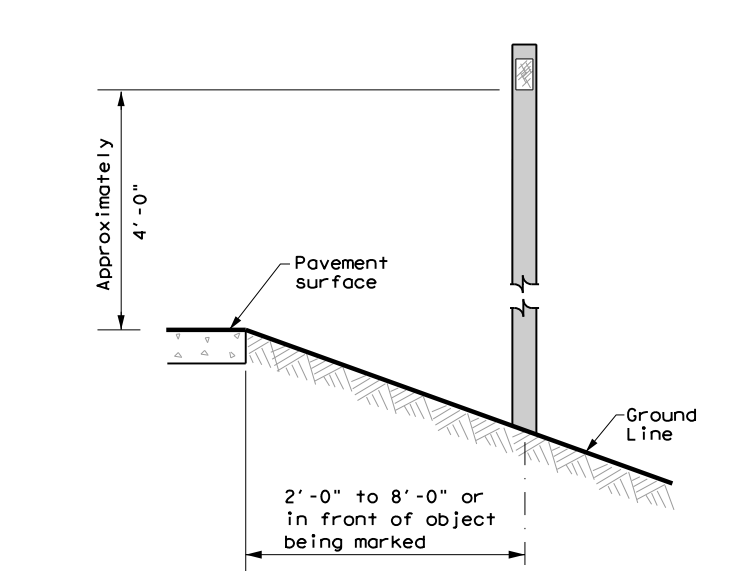POST TYPE AND SUPPORT FOUNDATION DETAILS				TYPE OF BARRIER MOUNTS		
WING CHANNEL (WC)	FLEXIBLE POSTS (YFLX, WFLX)		WEDGE ANCHOR SYSTEMS		GUARD FENCE ATTACHMENT	
GND	GND	SRF	WAS	WAP	GF 1	
						
	EMBEDDED	SURFACE MOUNT	STEEL	PLASTIC	GF 2	
NOTES 1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only. 2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.			NOTE 1. Install per manufacturer's recommendations.			
NOTES 1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices. 2. Install per manufacturer's recommendations. 3. Post length may vary to meet field conditions. 4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.					CONCRETE TRAFFIC BARRIER (CTB) 	
TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS 		CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN 		DELINEATORS AND TYPE 2 OBJECT MARKERS 		GENERAL NOTES 1. Place delineators on a section of roadway at a consistent distance from the edge of pavement. 2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction. 3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible. 4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation. 5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface. 6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.
NOTE Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)		NOTE Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.		NOTE See general notes 1, 2 and 3.		



Texas Department of Transportation

Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER INSTALLATION


D & OM(2)-20

FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	090119		176	VARIOUS
10-09 3-15	DIST	COUNTY		SHEET NO.
4-10 7-20	PAR	GRAYSON		71

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any other project. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any other project.


DATE: 11/2/2022 4:22:38 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\090119\090119.dgn

CROSSOVERS

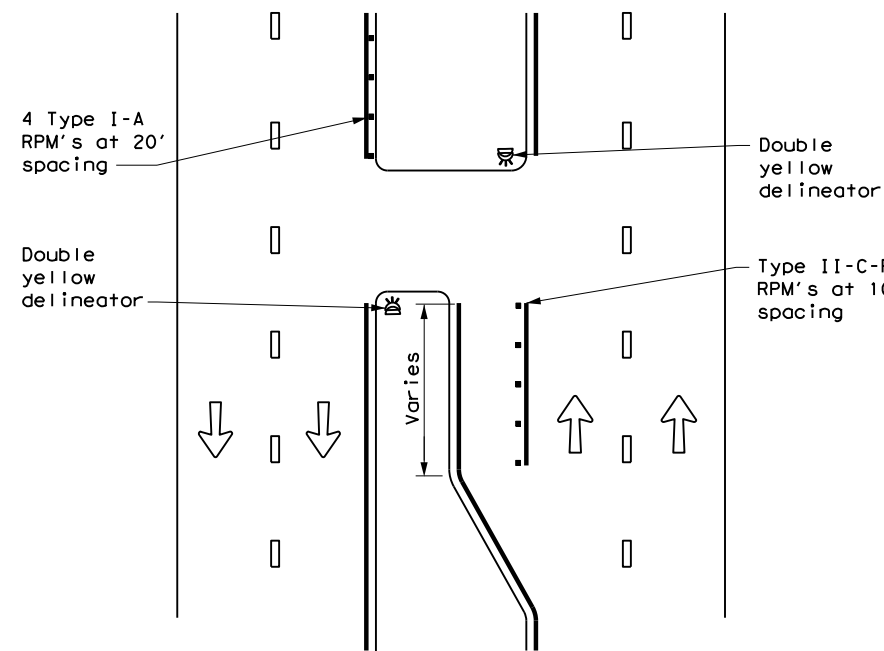


DETAIL 1

FOR CULVERTS WITHOUT MBGF

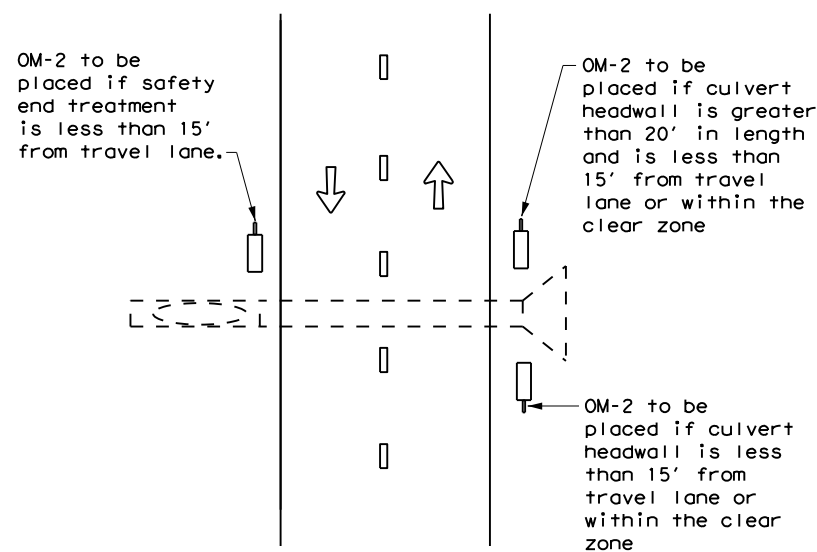


DETAIL 2

FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES

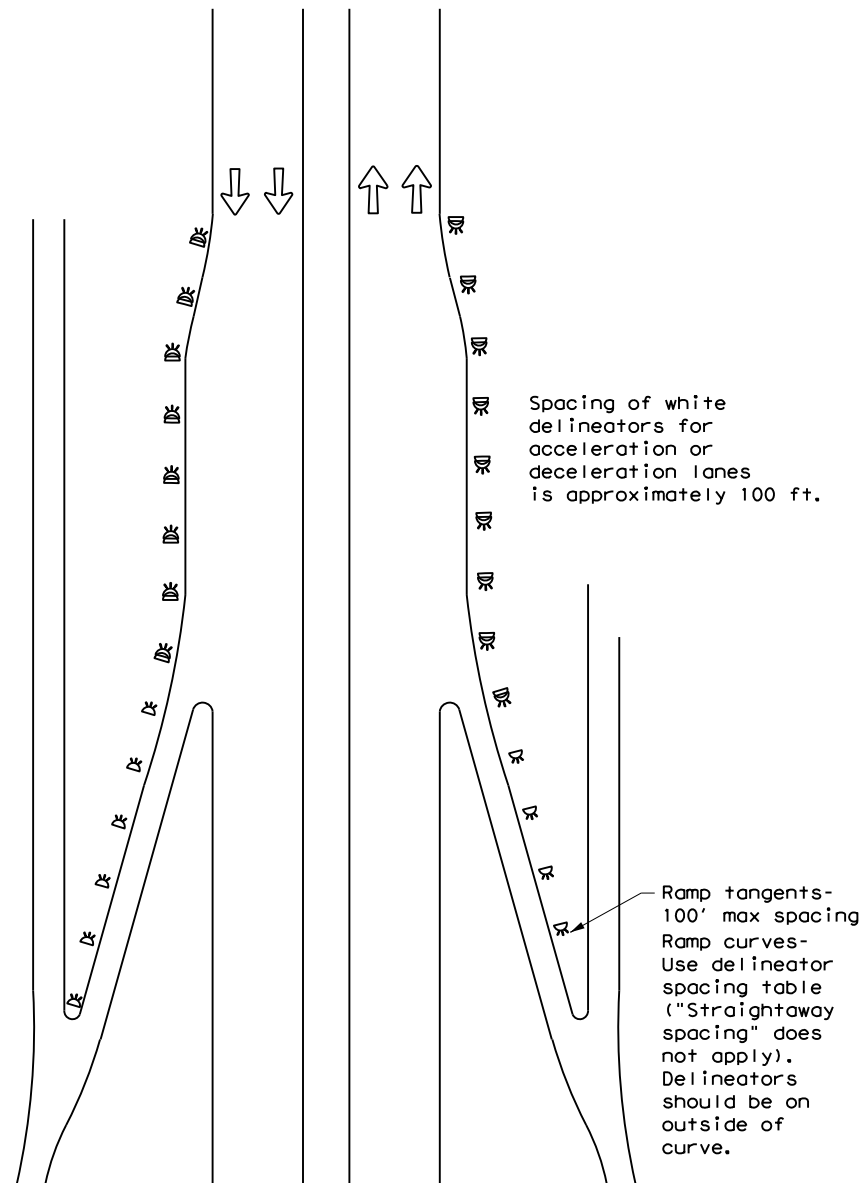


DETAIL 3

TYPICAL APPLICATION OF DEAD END BARRICADE

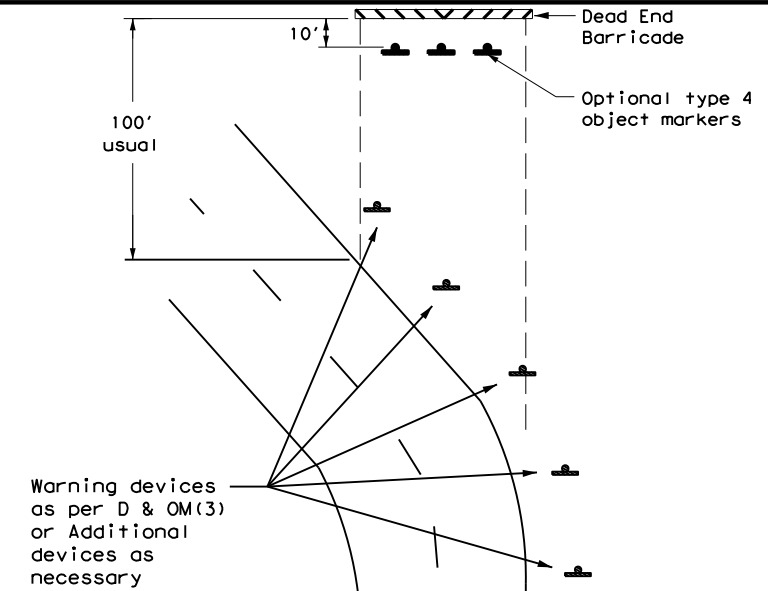

DETAIL 4

TYPICAL DEAD END BARRICADE INSTALLATION

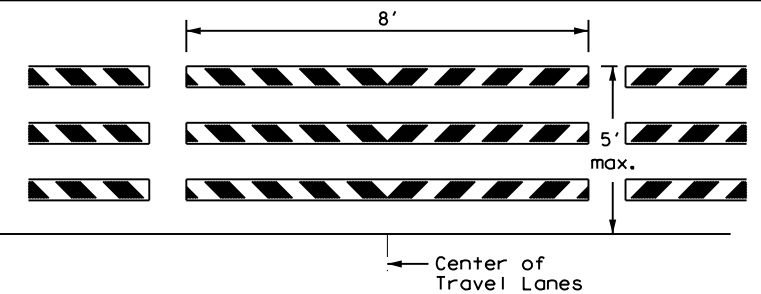

NOTES

- Barricade striping shall be red and white reflective sheeting for all permanent road closures.
- Barricade striping is red and white sloping toward the center of the roadway.
- Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

DETAIL 5

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator










DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(4) -20


FILE: dom4-20.dgn	DN: TXDOT	CK: TXDOT	OW: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	090119	176	VARIOUS	
3-15	DIST	COUNTY	SHEET NO.	
7-20	PAR	GRAYSON	72	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any other project or for any other purpose.

DATE: 11/2/2022 4:22:38 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-18-19\09-18-19.dwg

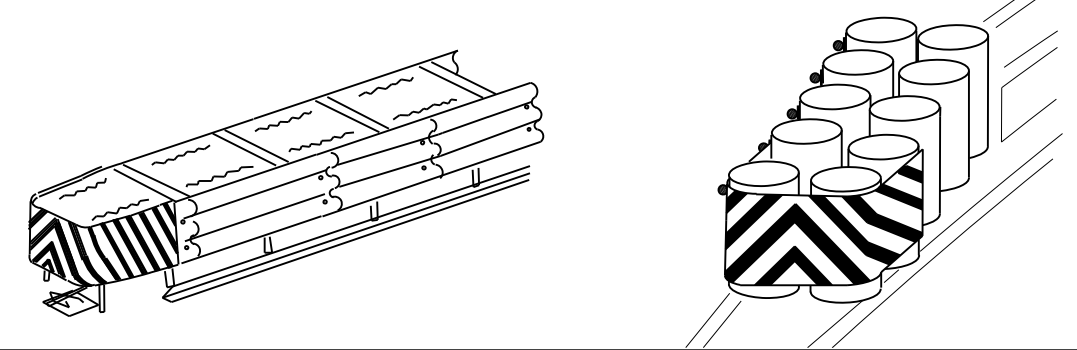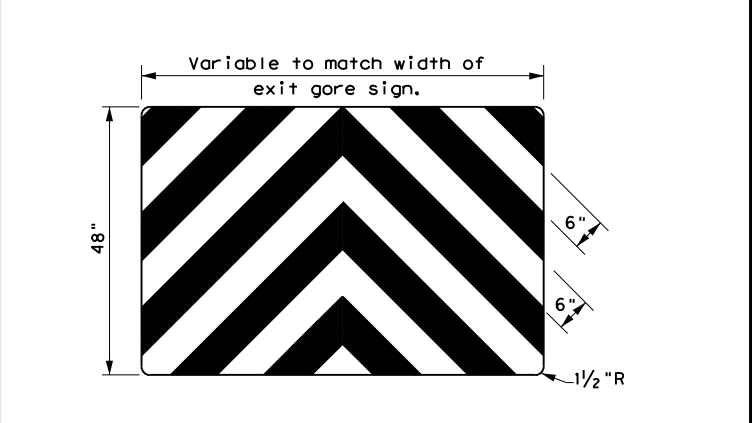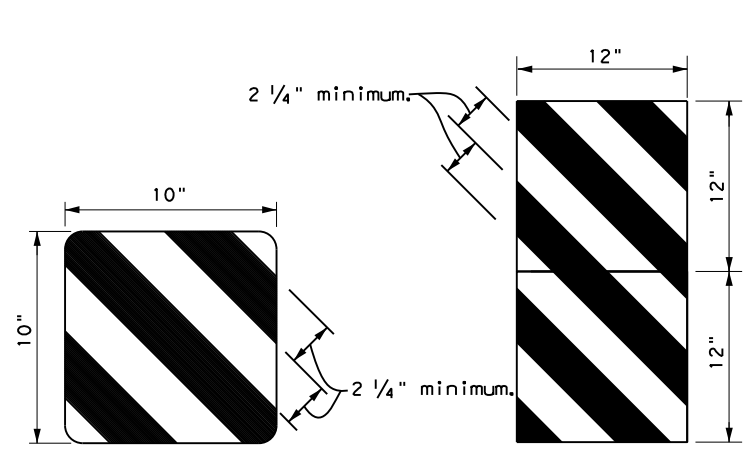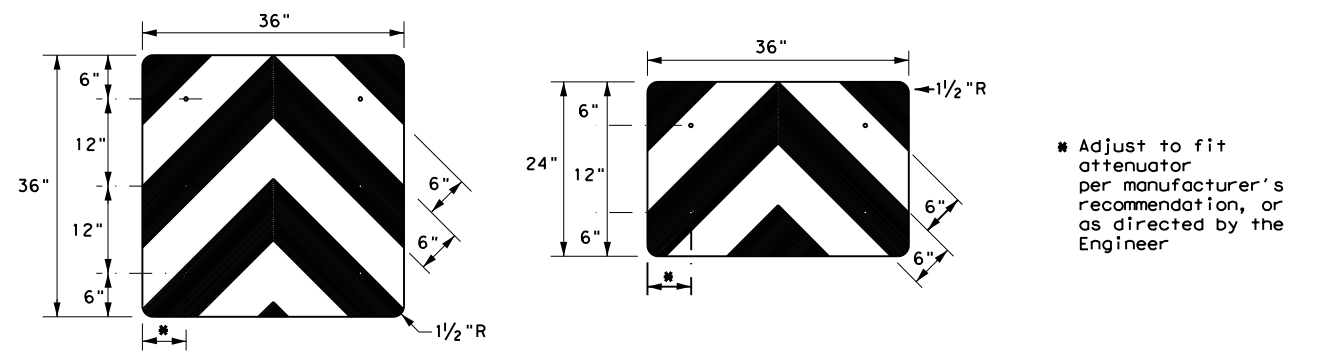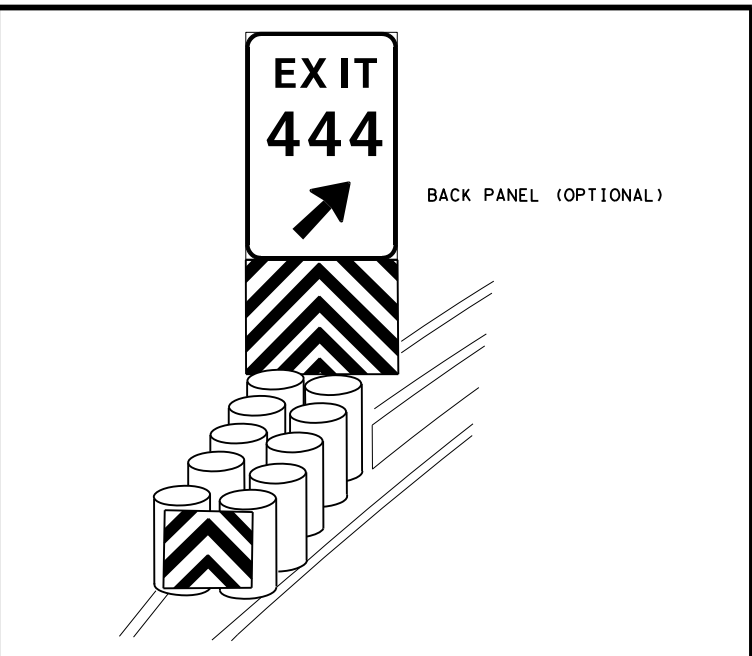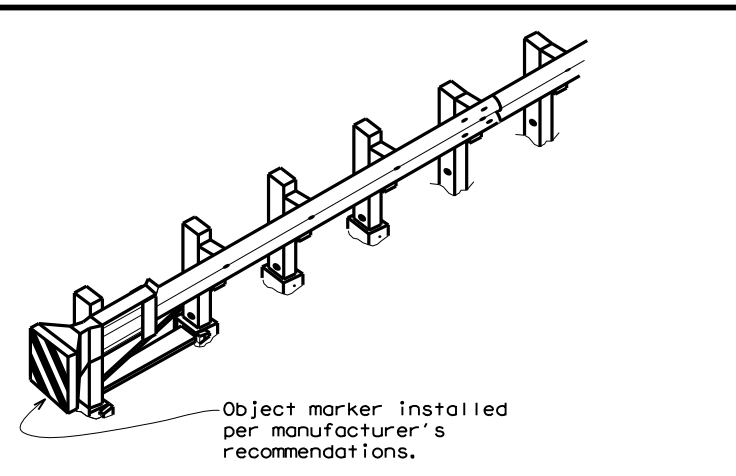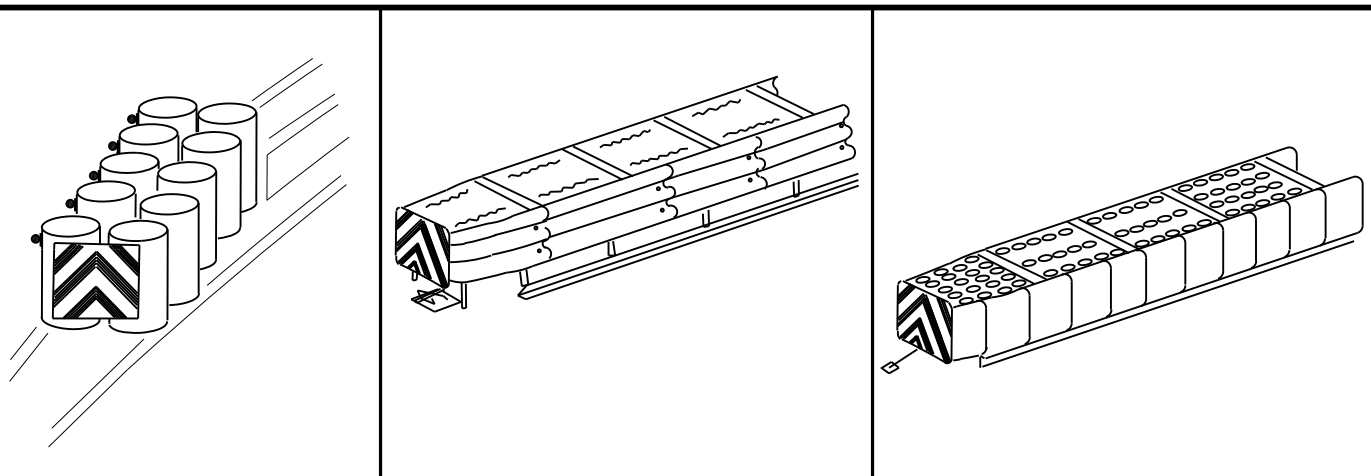

OBJECT MARKERS SMALLER THAN 3 FT²

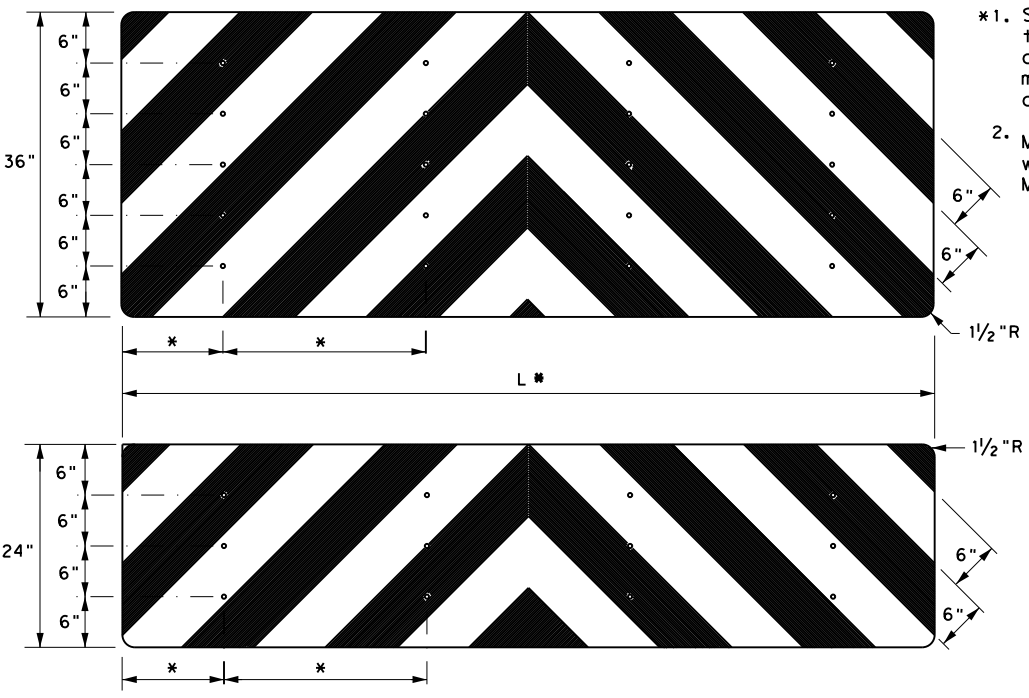


- NOTES**
- Spacing should be adjusted to attach through centerline of drum, per attenuator manufacturer's recommendation, or as directed by the Engineer.
 - Mounting should be flush with top of attenuator. Minimum size 96" x 24".

NOTES


- Object Markers shall conform to the Texas MUTCD and meet the color and reflectivity requirement of Department Material Specification DMS 8300. Background shall be yellow reflective sheeting (Type B or C) and Chevron shall be black.
- Object Markers may be fabricated from adhesive backed reflective sheeting applied directly to guardrail end treatment, or applied directly to an "end cap" as per the manufacturer's recommendation. Direct applied sheeting shall provide a smooth surface and have no wrinkles, air bubbles, cuts or tears. A radius at the corners is not required for direct applied sheeting.
- Object Marker size may be reduced to fit smaller devices. Width of alternating black and yellow stripes are typically 6". Object Markers smaller than 3ft may have reduced width stripes of a minimum of 2 1/4".
- Pop rivets, screws, or nuts and bolts may be used to attach object markers and reflectors. Holes, slots or other openings may be cut or drilled through object markers to allow cable or other attachments.
- Object Marker at nose of attenuator is subsidiary to the attenuator.
- See D & OM (1-4) for required barrier reflectors.

		Traffic Safety Division Standard	
DELINEATOR & OBJECT MARKER FOR VEHICLE IMPACT ATTENUATORS			
D & OM(VIA) -20			
FILE: domvia20.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT
© TxDOT December 1989	CONT	SECT	JOB
REVISIONS		0901 19	176
4-92 8-04	DIST	COUNTY	SHEET NO.
8-95 3-15	PAR	GRAYSON	73
4-98 7-20			
20G			


DATE: 11/2/2022 4:22:39 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\09-18-18\09-18-18.dwg
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any data other than that which is specifically identified in its use.

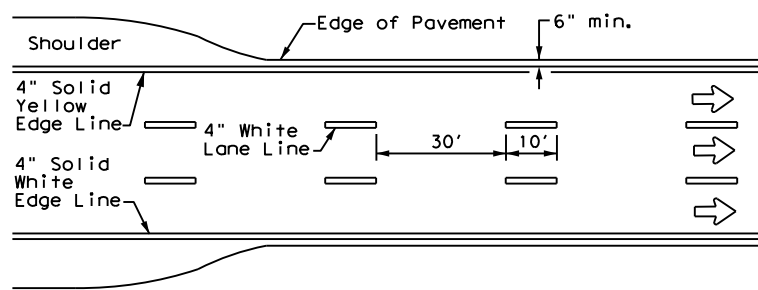


**EDGE LINE AND LANE LINES
ONE-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

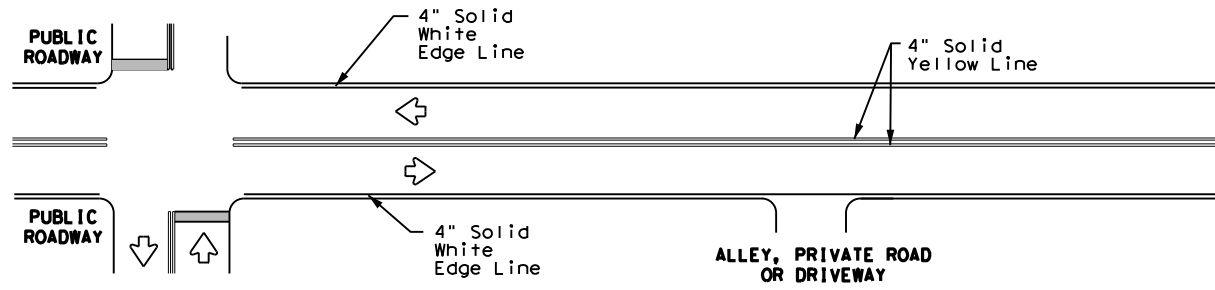


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

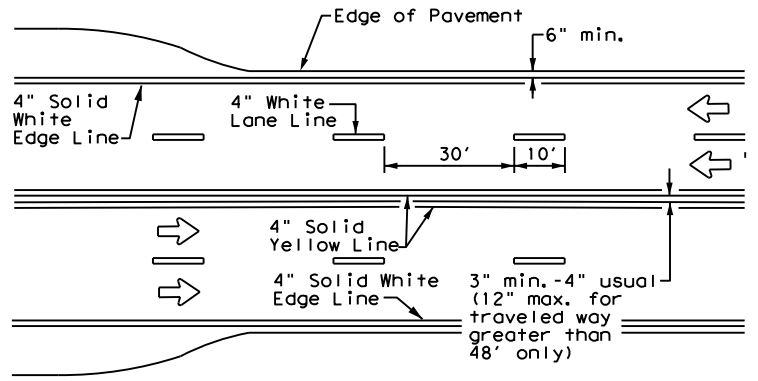


**CENTERLINE AND LANE LINES
FOUR LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

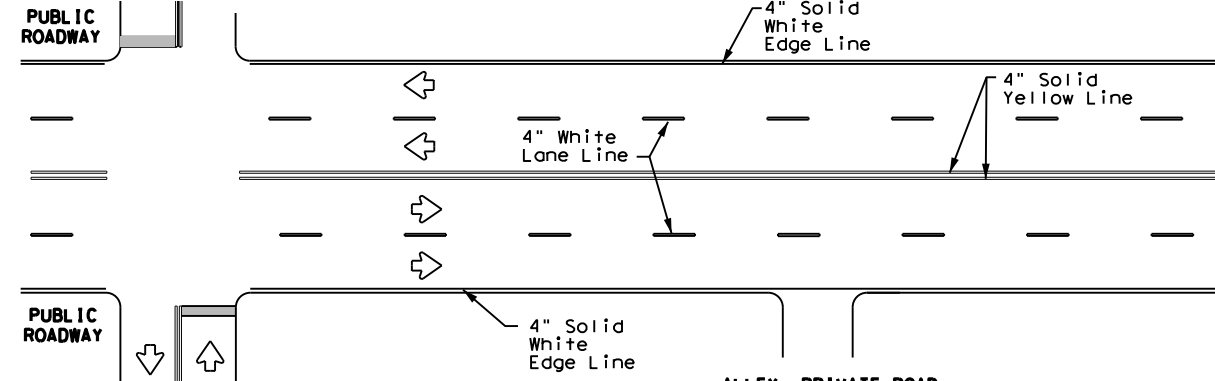


**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

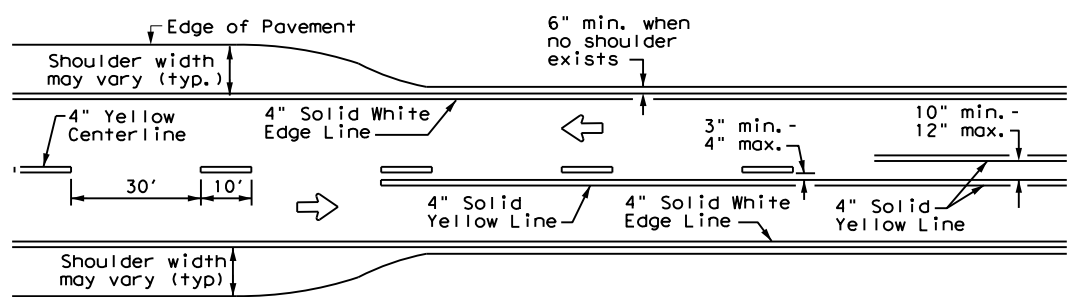

**TWO LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**




For posted speed on road being marked equal to or less than 40 MPH.

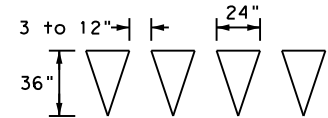

For posted speed on road being marked equal to or greater than 45 MPH.

YIELD LINES

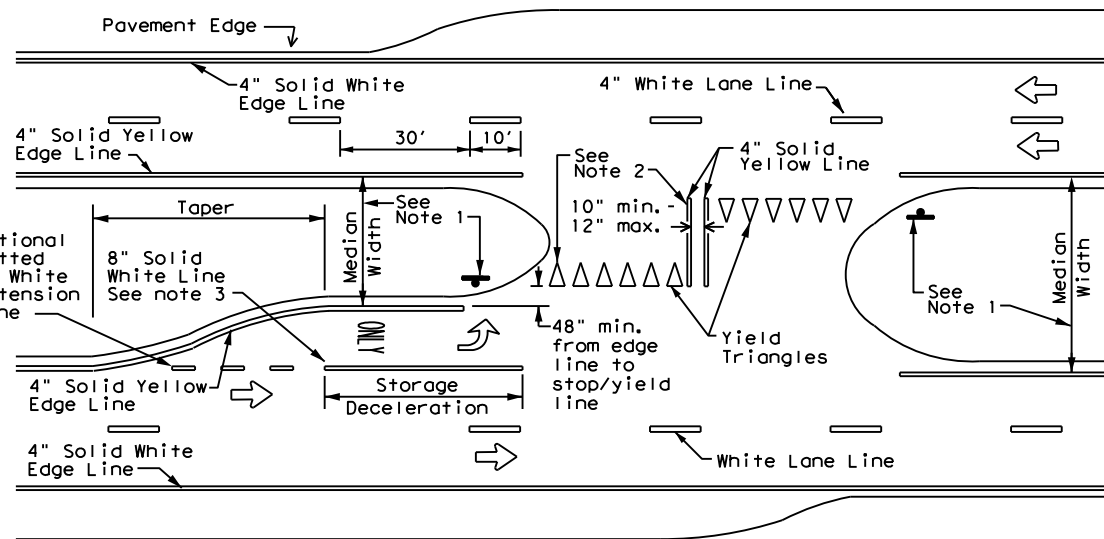

FOUR LANE DIVIDED ROADWAY CROSSOVERS

NOTES


- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop bars/yield triangles) when a 50' or greater median centerline can be placed. Stop bars shall only be used with stop signs. Yield triangles shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

GENERAL NOTES

- Edgeline striping shall be as shown in the plans or as directed by the Engineer. The edgeline should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edgelines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the inside of edgeline to the inside of edgeline of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

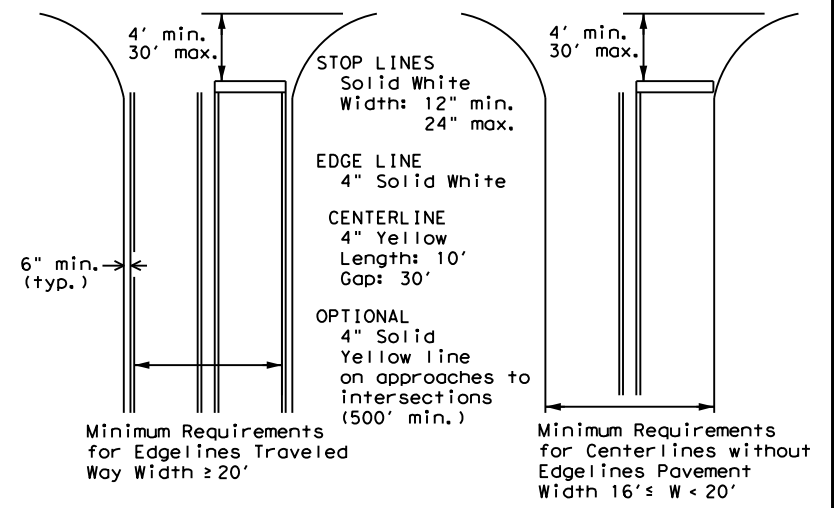

**GUIDE FOR PLACEMENT OF STOP LINES,
EDGE LINE & CENTERLINE**

Based on Traveled Way and Pavement Widths for Undivided Highways



**TYPICAL STANDARD
PAVEMENT MARKINGS**

PM(1) - 20

FILE: pm1-20.dgn	DN:	CK:	DW:	CK:
© TxDOT November 1978	CONT	SECT	JOB	HIGHWAY
8-95 3-03 REVISIONS	0901	19	176	VARIOUS
5-00 2-12	DIST	COUNTY	SHEET NO.	
8-00 6-20	PAR	GRAYSON	75	

DATE: 11/23/2022 9:34:00 AM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\IPWD parking lot rehab projects\CSJ 0901-19-176, etc\Submi\101\95% Plans\DGNS\077 SW3P.dgn

SITE DESCRIPTION

PROJECT LIMITS: THIS PROJECT IS IN NORTHCENTRAL GRAYSON COUNTY WITHIN EISENHOWER STATE PARK

PROJECT DESCRIPTION: REHABILITATION/HMAC OVERLAY AND OVERLAY OF EXISTING ROADS

MAJOR SOIL DISTURBING ACTIVITIES:

INCLUDES PREP ROW, EMBANKMENT, EROSION AND SEDIMENTARY CONTROLS, AND PERMANENT SEEDING.

TOTAL PROJECT AREA: 55 ACRES

TOTAL AREA TO BE DISTURBED: 5.35 AC (9.7%)

EXISTING CONDITION OF SOIL & VEGETATIVE COVER AND % OF EXISTING VEGETATIVE COVER:

The existing soil consists of Bolar-Aledo complex consisting of stony, loamy clay, well drained, high runoff. Slopes range from 3 to 15 percent. Native grasses, brush, and trees cover the existing soil.

NAME OF RECEIVING WATERS:

Lake Texoma (segment *0203), flows directly into the Red River (segment *0202).

EROSION AND SEDIMENT CONTROLS

SOIL STABILIZATION PRACTICES & STRUCTURAL PRACTICES:

EROSION CONTROL:

- TEMPORARY SEEDING
- PERMANENT PLANTING, SODDING, OR SEEDING
- MULCHING
- SOIL RETENTION BLANKET
- BUFFER ZONES
- PRESERVATION OF NATURAL RESOURCES

OTHER:

DISTURBED AREAS ON WHICH CONSTRUCTION ACTIVITY HAS CEASED (TEMPORARILY OR PERMANENTLY) SHALL BE STABILIZED WITHIN 14 DAYS UNLESS ACTIVITIES ARE SCHEDULED TO RESUME AND DO WITHIN 21 DAYS.

SEDIMENTATION CONTROL:

- SILT FENCES
- HAY BALES
- ROCK BERMS
- DIVERSION, INTERCEPTOR, OR PERIMETER DIKES
- DIVERSION, INTERCEPTOR, OR PERIMETER SWALES
- DIVERSION DIKE AND SWALE COMBINATIONS
- PIPE SLOPE DRAINS
- PAVED FLUMES
- ROCK BEDDING AT CONSTRUCTION EXIT
- TIMBER MATTING AT CONSTRUCTION EXIT
- CHANNEL LINERS
- SEDIMENT TRAPS
- SEDIMENT BASINS
- STORM INLET SEDIMENT TRAP
- STONE OUTLET STRUCTURES
- CURBS AND GUTTERS
- STORM SEWERS
- VELOCITY CONTROL DEVICES
- EROSION CONTROL LOGS

POST-CONSTRUCTION CONTROLS:

- RETENTION / IRRIGATION
- EXTENDED DETENTION BASIN (ie: ROCK BERMS)
- VEGETATIVE FILTER STRIPS
- GRASSY SWALES
- VEGETATIVE LINED DRAINAGE DITCHES
- CONSTRUCTED WET LANDS
- WET BASINS
- SAND FILTER SYSTEMS

NARRATIVE - SEQUENCE OF CONSTRUCTION (STORM WATER MANAGEMENT) ACTIVITIES:

THE ORDER OF ACTIVITIES WILL BE AS FOLLOWS:

MAJOR SOIL DISTURBING ACTIVITIES SHALL NOT BE PERFORMED UNTIL EMBANKMENT PLACEMENT IS SCHEDULED TO BEGIN WITHIN FIVE (5) WORKING DAYS.

INSTALL EROSION AND SEDIMENTATION CONTROLS PRIOR TO SOIL DISTURBANCE WHENEVER POSSIBLE.

ONCE BEGUN, EARTHWORK ACTIVITIES SHALL BE PROGRESSED WITHOUT DELAY, UNLESS APPROVED BY THE ENGINEER, UNTIL FINAL GRADING IS ACCOMPLISHED.

EROSION CONTROL MEASURES SHALL BE APPLIED IMMEDIATELY UPON COMPLETION OF THE EMBANKMENT PLACEMENT TO MINIMIZE POTENTIAL WATER QUALITY IMPACTS.

REMARKS: Disposal areas, stockpiles, and haul roads shall be constructed in a manner that will minimize and control the amount of sediment that may enter receiving waters. Disposal areas shall not be located in any wetland, waterbody or streambed. The Contractor shall designate a location for, construct, and maintain an area for concrete mixing, handling and delivery equipment to wash out. Construction staging areas and vehicle maintenance areas shall be constructed by the Contractor in a manner to minimize the runoff of pollutants. All waterways shall be cleared as soon as practicable of temporary embankment, temporary bridges, matting, falsework, piling, debris or other obstructions placed during construction operations that are not a part of the finished work.

MAINTENANCE: All erosion and sediment controls will be maintained in good working order. If a repair is necessary, it will be done at the earliest date possible, but no later than 7 calendar days after the surrounding exposed ground has dried sufficiently to prevent further damage from heavy equipment. The areas adjacent to creeks and drainageways shall have priority followed by devices protecting storm sewer inlets.

INSPECTION: An inspection will be performed by a TxDOT Inspector at least once every seven (7) calendar days. An inspection and maintenance report will be made per each inspection. Stormwater controls will be modified as directed by the Engineer based on these reports.

OTHER EROSION AND SEDIMENT CONTROLS:

WASTE MATERIALS: All trash and construction debris from the job site will be disposed of by the Contractor at a local dump. No construction materials will be buried on site.

HAZARDOUS WASTE (INCLUDING SPILL REPORTING): Any hazardous waste spills shall be reported to the TxDOT Safety Officer in Paris. It shall be the responsibility of the waste owner to provide for the required clean-up. If the owner cannot be determined, the district laboratory shall direct in the clean-up operation.

SANITARY WASTE: Any sanitary waste shall be collected from portable units as necessary or as required by local regulation by a licensed sanitary waste management contractor. All sanitary waste from permanent sites will be collected by local sanitary sewer systems.


OFFSITE VEHICLE TRACKING:

- HAUL ROADS DAMPENED FOR DUST CONTROL
- LOADED HAUL TRUCKS TO BE COVERED WITH TARPAULIN
- EXCESS DIRT ON ROAD REMOVED DAILY
- STABILIZED CONSTRUCTION ENTRANCE

THE CONTRACTOR IS RESPONSIBLE FOR ENSURING THAT ALL SUBCONTRACTORS ARE AWARE OF AND COMPLY WITH ALL COMPONENTS OF THE SW3P.

Monte R. Rater P.E.

11.03.22



EISENHOWER STATE PARK SW3P

© 2023			
CONT	SECT	JOB	HIGHWAY
0901	19	176	VARIOUS
DIST	COUNTY		SHEET NO.
PAR	GRAYSON		77

DATE: 11/2/2022 4:22:43 PM
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab\epic\090119\01232015\01232015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES)
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from its use.

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

- 1.
2. No Action Required Required Action

Action No.

1. Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
2. Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
3. Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP# _____

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

- 1.
- 2.
- 3.
- 4.

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input checked="" type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input checked="" type="checkbox"/> Mulch Filter Berm and Socks	<input checked="" type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input checked="" type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required Required Action

Action No.

- 1.
- 2.
- 3.
- 4.

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required Required Action

Action No.

- 1.
- 2.
- 3.
- 4.

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

- No Action Required Required Action

Action No.

- 1.
- 2.
- 3.
- 4.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used. Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- * Dead or distressed vegetation (not identified as normal)
- * Trash piles, drums, canister, barrels, etc.
- * Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required Required Action

Action No.

- 1.
- 2.
- 3.


VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)


- No Action Required Required Action

Action No.


- 1.
- 2.
- 3.

 Texas Department of Transportation		Design Division Standard	
ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS EPIC			
© 2023			
FILE: epic.dgn	DN: TxDOT	CK: RG	DW: VP
© TxDOT: February 2015	CONT	SECT	JOB
12-12-2011 (DS) REVISIONS	0901	19	176
05-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY	SHEET NO.
01-23-2015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	PAR	GRAYSON	78

DATE: 11/2/2022
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSJ 0901-19-176, etc\Submit\195% Plans\DGNS\079 EC (9) -16.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

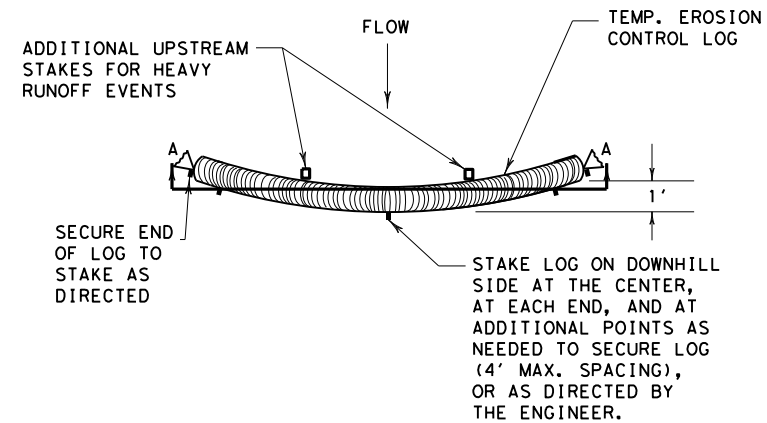

PLAN VIEW

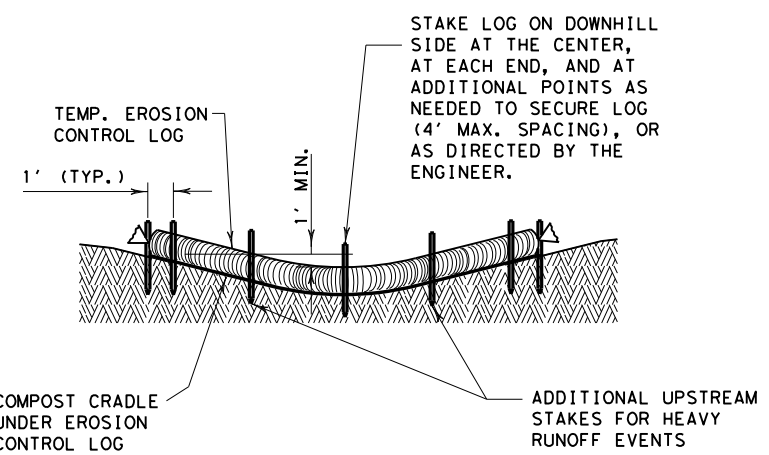


SECTION A-A
EROSION CONTROL LOG DAM


CL-D

LEGEND

- CL-D EROSION CONTROL LOG DAM
- CL-BOC EROSION CONTROL LOG AT BACK OF CURB
- CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
- CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
- CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
- CL-DI EROSION CONTROL LOG AT DROP INLET
- CL-CI EROSION CONTROL LOG AT CURB INLET
- CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET

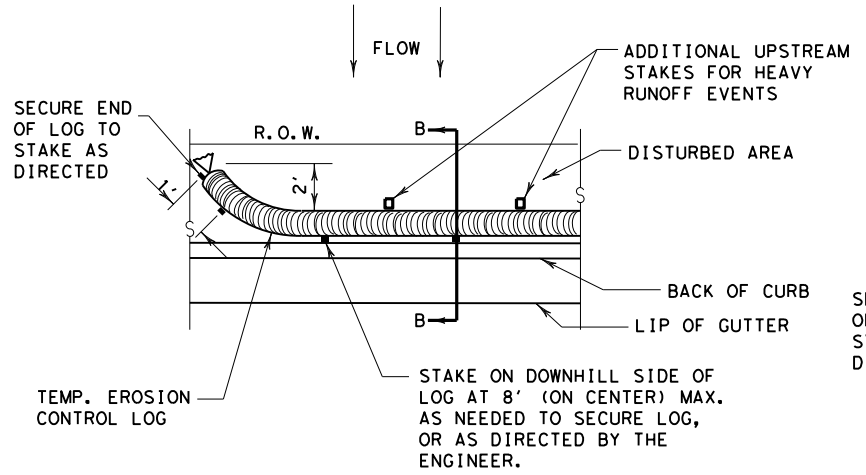


PLAN VIEW

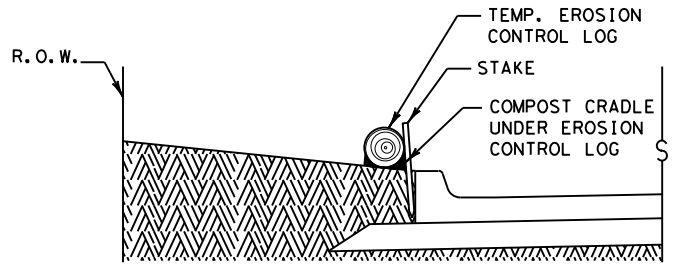


SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB


CL-BOC



REBAR STAKE DETAIL

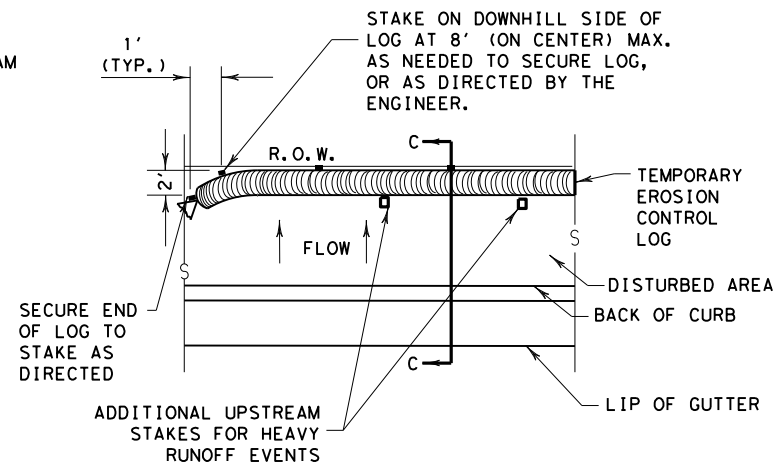


PLAN VIEW

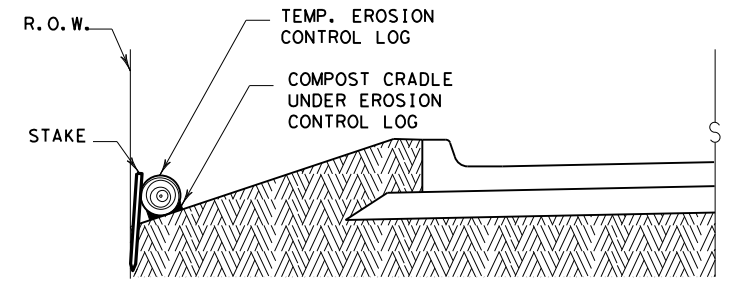

SECTION C-C

EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

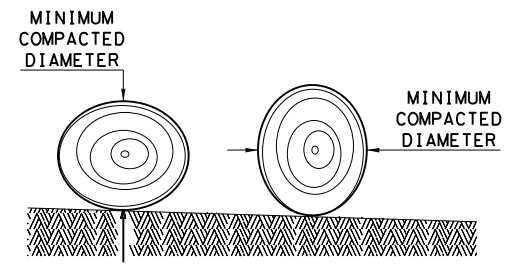

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.


- GENERAL NOTES:**
1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
 2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
 3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
 4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
 5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
 6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
 7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
 8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
 9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
 10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3

		<i>Design Division Standard</i>	
<p>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES</p> <p>EROSION CONTROL LOG</p> <p>EC (9) - 16</p>			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0901	19	176
	DIST	COUNTY	SHEET NO.
	PAR	GRAYSON	79


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 11/2/2022
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSJ 0901-19-176, etc\Submit\195% Plans\DGNS\080 EC (9)-16.dgn

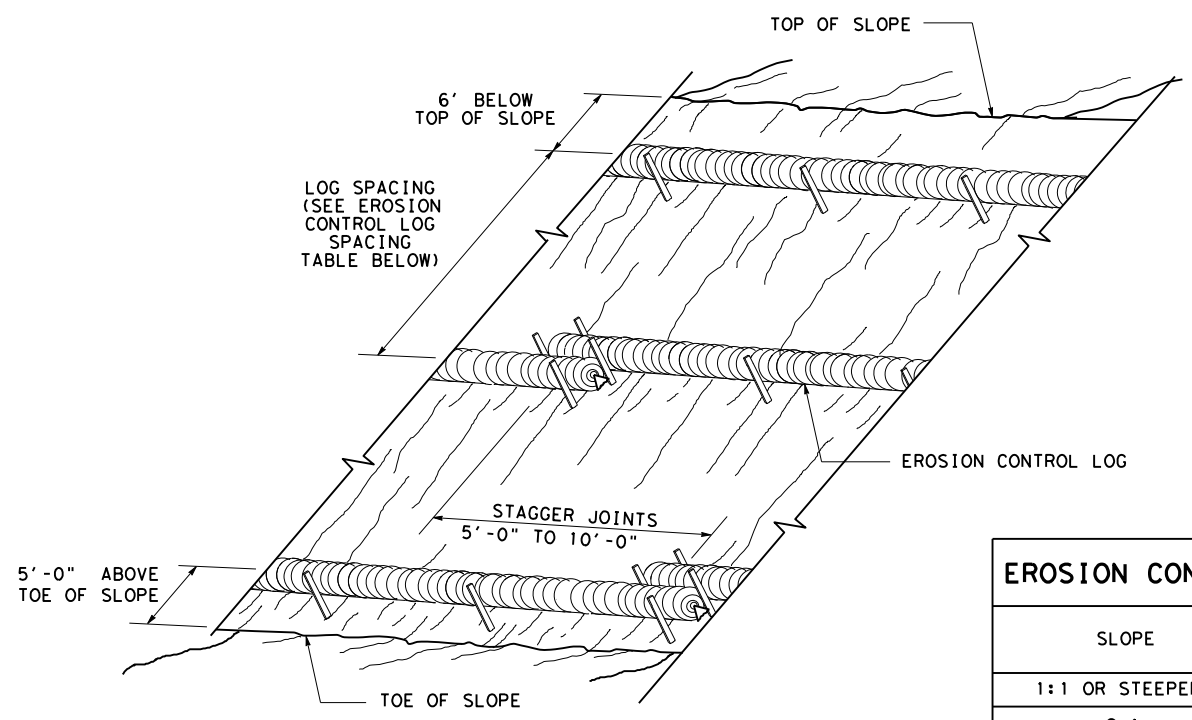

**EROSION CONTROL LOGS ON SLOPES
 STAKE AND TRENCHING ANCHORING**


CL-SST

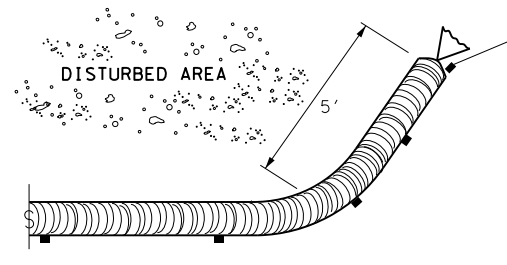

END SECTION RAP DETAIL


SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
 SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
 HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

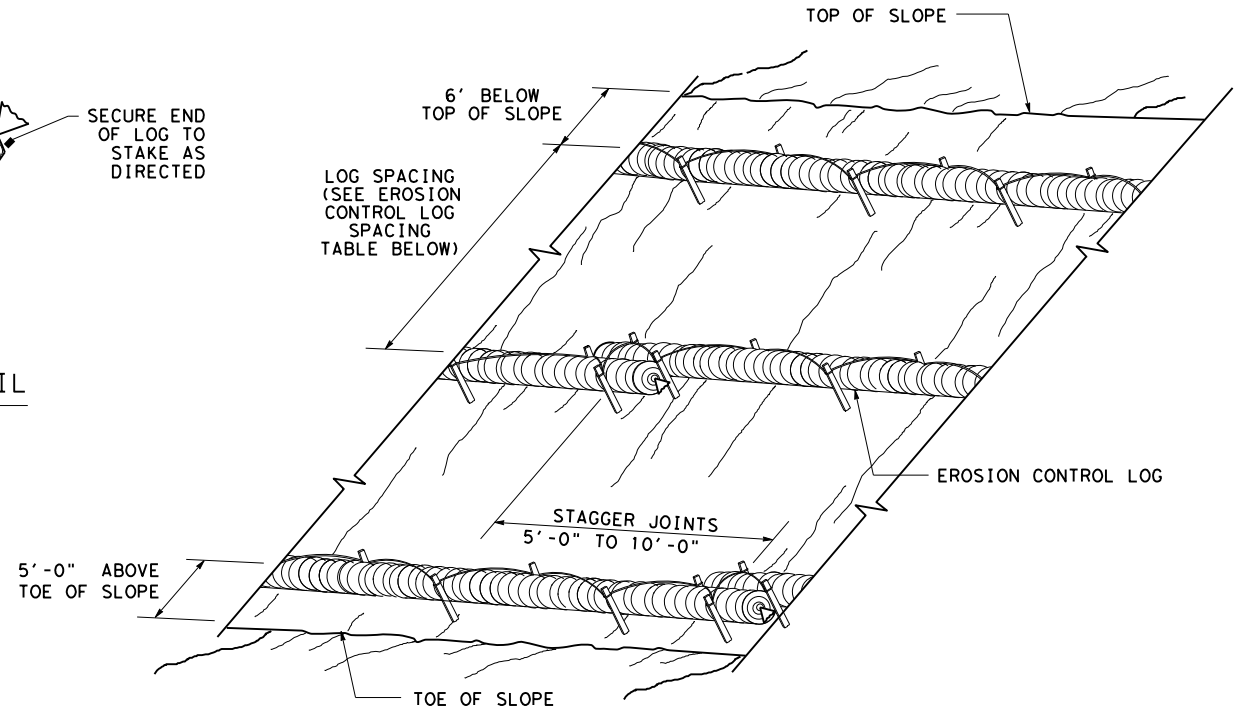


**EROSION CONTROL LOGS ON SLOPES
 STAKE AND LASHING ANCHORING**

CL-SSL

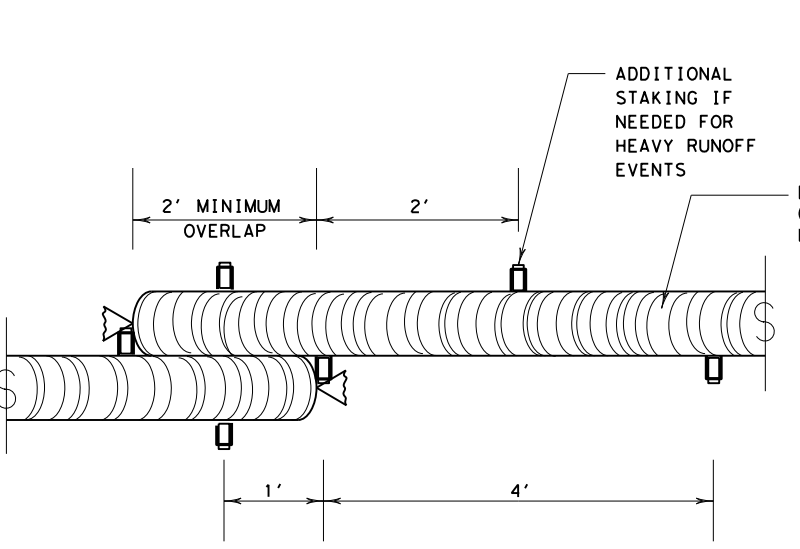

STAKE AND TRENCHING ANCHORING DETAIL


CL-SST

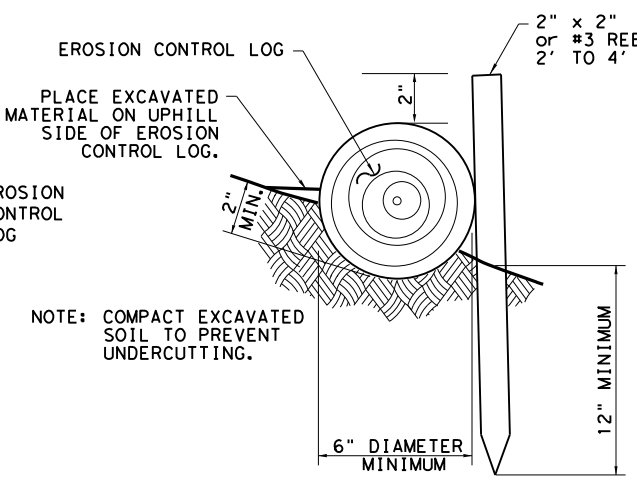


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"



STAKE NOTCH DETAIL

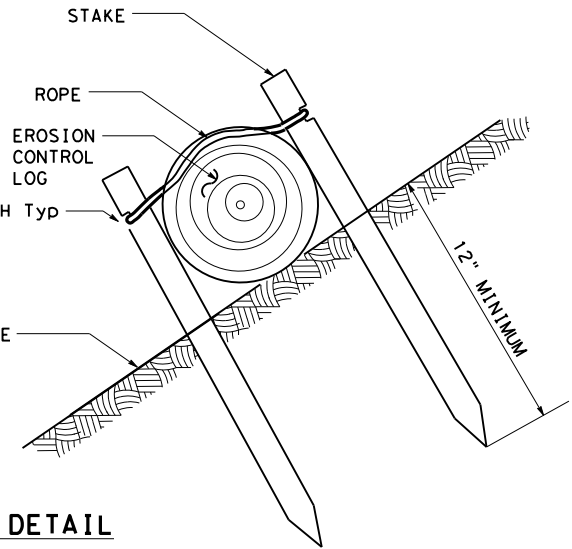

SHEET 2 OF 3


Design Division Standard

**TEMPORARY EROSION,
 SEDIMENT AND WATER
 POLLUTION CONTROL MEASURES
 EROSION CONTROL LOG
 EC(9) - 16**

FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT	CK: LS
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY
REVISIONS	0901	19	176	VARIOUS
DIST	COUNTY	SHEET NO.		
PAR	GRAYSON			80


DATE: 11/2/2022
 FILE: C:\Users\SWALKER7\Desktop\Projects\Eisenhower\TPWD parking lot rehab projects CSJ 0901-19-176, etc\Submit\195% Plans\DGNS\081 EC (9)-16.dgn

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

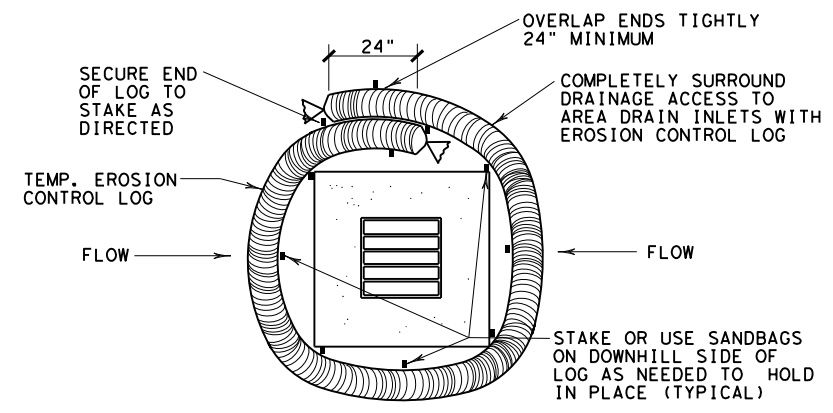


EROSION CONTROL LOG AT DROP INLET

CL-DI

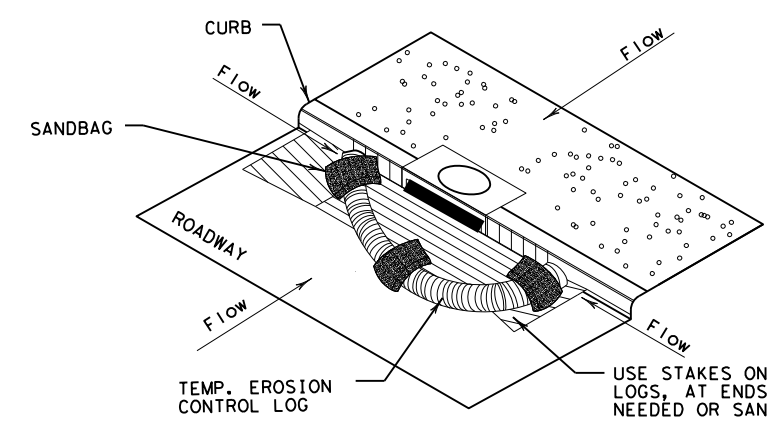

EROSION CONTROL LOG AT CURB INLET


CL-CI

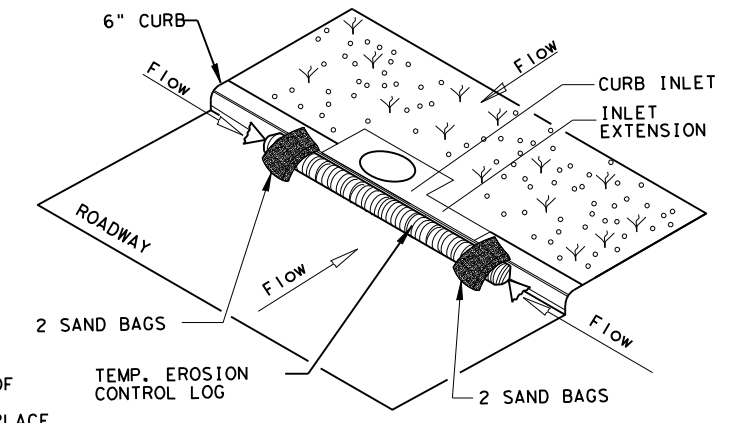

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

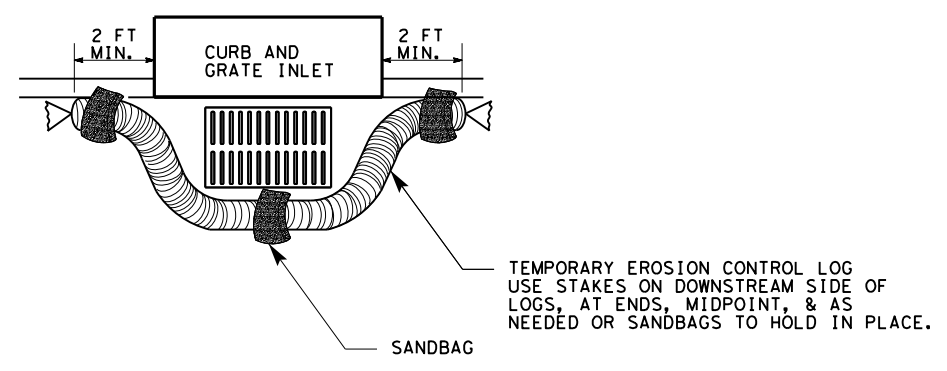

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

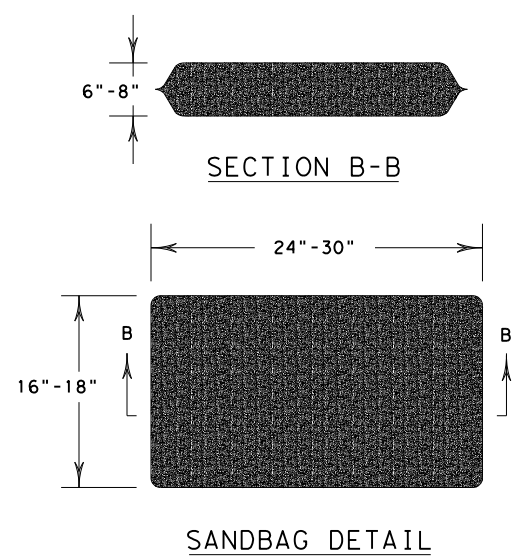

SHEET 3 OF 3

		<i>Design Division Standard</i>	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES			
EROSION CONTROL LOG			
EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0901	19	176
DIST	COUNTY		SHEET NO.
PAR	GRAYSON		81