

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT

FEDERAL AID PROJECT NUMBER
STP 2023(734)HES
PROJECT NUMBER
0265-05-089, ETC


NET LENGTH OF PROJECT = 2,687.52 FEET = 0.509 MILES ——— ROADWAY = 2,687.52 FEET = 0.509 MILES
BRIDGE = 0 FEET = 0 MILES

CSJ	ROADWAY LENGTH		BRIDGE LENGTH		TOTAL LENGTH	
	(FT)	(MI)	(FT)	(MI)	(FT)	(MI)
0265-05-089	1,056.00	0.200	N/A	N/A	1,056.00	0.200
0472-01-050	1,631.52	0.309	N/A	N/A	1,631.52	0.309
TOTAL	2,687.52	0.509	N/A	N/A	2,687.52	0.509

BASTROP COUNTY SH 71, ETC

FROM: AT COTTLETOWN RD (CR 154)
TO:

FOR THE CONSTRUCTION OF INTERSECTION IMPROVEMENT
CONSISTING OF LENGTHEN LEFT TURN LANE

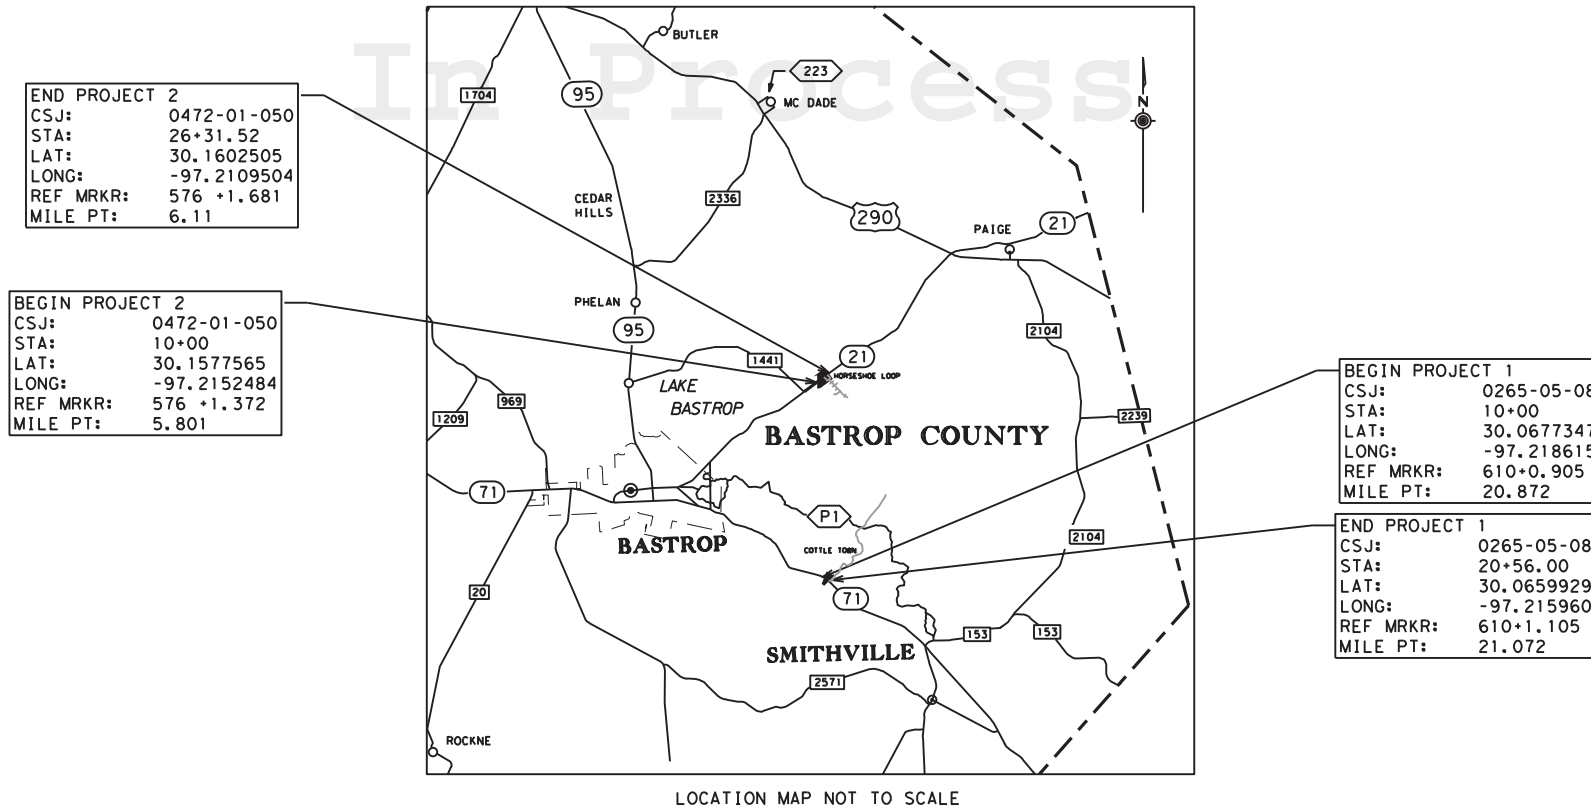

END PROJECT 2
CSJ: 0472-01-050
STA: 26+31.52
LAT: 30.1602505
LONG: -97.2109504
REF MRKR: 576 +1.681
MILE PT: 6.11

BEGIN PROJECT 2
CSJ: 0472-01-050
STA: 10+00
LAT: 30.1577565
LONG: -97.2152484
REF MRKR: 576 +1.372
MILE PT: 5.801

BEGIN PROJECT 1
CSJ: 0265-05-089
STA: 10+00
LAT: 30.0677347
LONG: -97.2186152
REF MRKR: 610+0.905
MILE PT: 20.872

END PROJECT 1
CSJ: 0265-05-089
STA: 20+56.00
LAT: 30.0659929
LONG: -97.2159601
REF MRKR: 610+1.105
MILE PT: 21.072

LOCATION MAP NOT TO SCALE

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSINGS: NONE

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION ON NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS FOR ALL FEDERAL-AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, JULY 2022).



CONT	SECT	JOB	HIGHWAY
0265	05	089, ETC	SH 71, ETC
DIST	COUNTY		SHEET NO.
AUS	BASTROP		1

DESIGN SPEED

MAIN LANES: 35 **
FRONTAGE ROADS: N/A
RAMPS: N/A

** NOTE: DESIGN SPEED IS FOR HSIP ELEMENTS ONLY

A. D. T.

CSJ: 0265-05-089
2021: 22,470 VPD
2041: 28,762 VPD
CSJ: 0472-01-050
2021: 11,465 VPD
2041: 15,134 VPD

FINAL PLANS

DATE OF LETTING: _____
DATE WORK BEGAN: _____
DATE WORK COMPLETED AND ACCEPTED: _____
FINAL CONTRACT COST: \$ _____
CONTRACTOR: _____
LIST OF APPROVED CHANGE ORDERS:

I CERTIFY THAT THIS PROJECT WAS CONSTRUCTED IN SUBSTANTIAL COMPLIANCE WITH THE FINAL AS-BUILT PLANS AND SPECIFICATIONS.

AREA ENGINEER P. E. DATE

RECOMMENDED FOR LETTING: 3/7/2023

DocuSigned by:
Susana Ceballos P.E.
E1816167B5C7414...
DISTRICT DESIGN ENGINEER

APPROVED FOR LETTING: 3/7/2023

DocuSigned by:
Heather Kelly-Ng
DIRECTOR OF TRANSPORTATION PLANNING & DEVELOPMENT

SUBMITTED FOR LETTING: 1/27/2023

DocuSigned by:
Diana K. Schulzes P.E.
6775445255A3482...
AREA ENGINEER

PLAN SHEETS

SHEET NO.	GENERAL
1	TITLE SHEET
2	INDEX OF SHEETS
3	LOCATION MAP
4, 4A-4G	GENERAL NOTES
5, 5A	ESTIMATE & QUANTITY
6	QUANTITY SUMMARY SHEET
7	EXISTING LAYOUT SH 21
8	EXISTING LAYOUT SH 71
9	PROPOSED LAYOUT SH 21
10	PROPOSED LAYOUT SH 71
11	EXISTING TYPICAL SECTION SH 21
12	EXISTING TYPICAL SECTION SH 71
13	PROPOSED TYPICAL SECTION SH 21
14	PROPOSED TYPICAL SECTION SH 71
15	TYPICAL SECTION DETAILS
15A, 15B	TRAFFIC CONTROL PLAN TYPICAL SECTION
16	PROJECT SEQUENCE

SHEET NO.	SIGNING AND PAVEMENT MARKING DETAILS
17, 7A, 17B, 17C	SIGNING, PAVEMENT MARKING AND DELINEATION LAYOUT - SH 21
18	SIGNING, PAVEMENT MARKING AND DELINEATION LAYOUT - SH 71
19	SUMMARY OF SMALL SIGNS

SHEET NO.	DRAINAGE DETAILS
20	SUMMARY OF RCP PARRALLEL DRAINAGE STRUCTURES
20A	CUT & RESTORE PAVEMENT DETAILS

SHEET NO.	ENVIRONMENTAL ISSUES
21, 21A	STORMWATER POLLUTION PREVENTION PLAN (SWP3)
22	OMIT
23	ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS (EPIC)
24	LOST PINE HABITAT CONSERVATION PLAN

STANDARD SHEETS

SHEET NO.	TRAFFIC CONTROL PLAN STANDARDS
*25	BC (1) -21
*26	BC (2) -21
*27	BC (3) -21
*28	BC (4) -21
*29	BC (5) -21
*30	BC (6) -21
*31	BC (7) -21
*32	BC (8) -21
*33	BC (9) -21
*34	BC (10) -21
*35	BC (11) -21
*36	BC (12) -21
*37	TCP (2-4) -18
*38	TCP (2-6) -18
*39	WZ (RCD) -13
*40	WZ (RS) -22
*41	WZ (STPM) -13
*42	WZ (UL) -13

STANDARD SHEETS CON'T

SHEET NO.	ROADWAY DETAILS STANDARDS
*43, 43A, 43B	BRIFEN (TL4) -14
*44	CASS (TL3) -14
*45	CASS (TL4) -14
*46	GBRLTR (TL3) -14
*47	GBRLTR (TL4) -14
*48, 48A	NU-CABLE (TL3) -14
*49, 49A	NU-CABLE (TL4) -14
*50	TSR (3) -13
*51	TSR (4) -13
*52	TSR (5) -13
*53	DWMB-22 (AUS)
*54	MB (1) -21
*55	MB (2) -21
*56	MB (3) -21
*57	MB (4) -21

SHEET NO.	STRUCTURE STANDARDS
*58	PSETRPSS-20
*59	PSETRRSE-20
*60	PSETSPSS-21
*61	SETPPDSE-20

SHEET NO.	PAVEMENT MARKINGS & DELINEATION STANDARDS
*62	PM (1) -22
*63	PM (2) -22
*64	D&OM (1) -20
*65	D&OM (2) -20
*66	D&OM (3) -20
*67	D&OM (4) -20
*68	D&OM (5) -20
*69	D&OM (6) -20
*70	D&OM (VIA) -20

SHEET NO.	ENVIRONMENTAL ISSUES STANDARDS
*71	EC (1) -16
*72, 72A, 72B	EC (9) -16
*73	AREF-21

DATE: \$DATE\$ \$TIME\$
FILE: \$FILES\$

* THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY SUPERVISION AND ARE APPLICABLE TO THIS PROJECT.


DocuSigned by:

Diana K. Schulze P.E.

P. E.

1/25/2023

DATE





Austin District
Bastrop Area Office



SH 71, ETC
INDEX OF SHEETS

CONTRACT	SECTION	JOB	HIGHWAY
0265	05	089, ETC	SH 71, ETC
DISTRICT	COUNTY	SHEET NO.	
AUS	BASTROP	2	

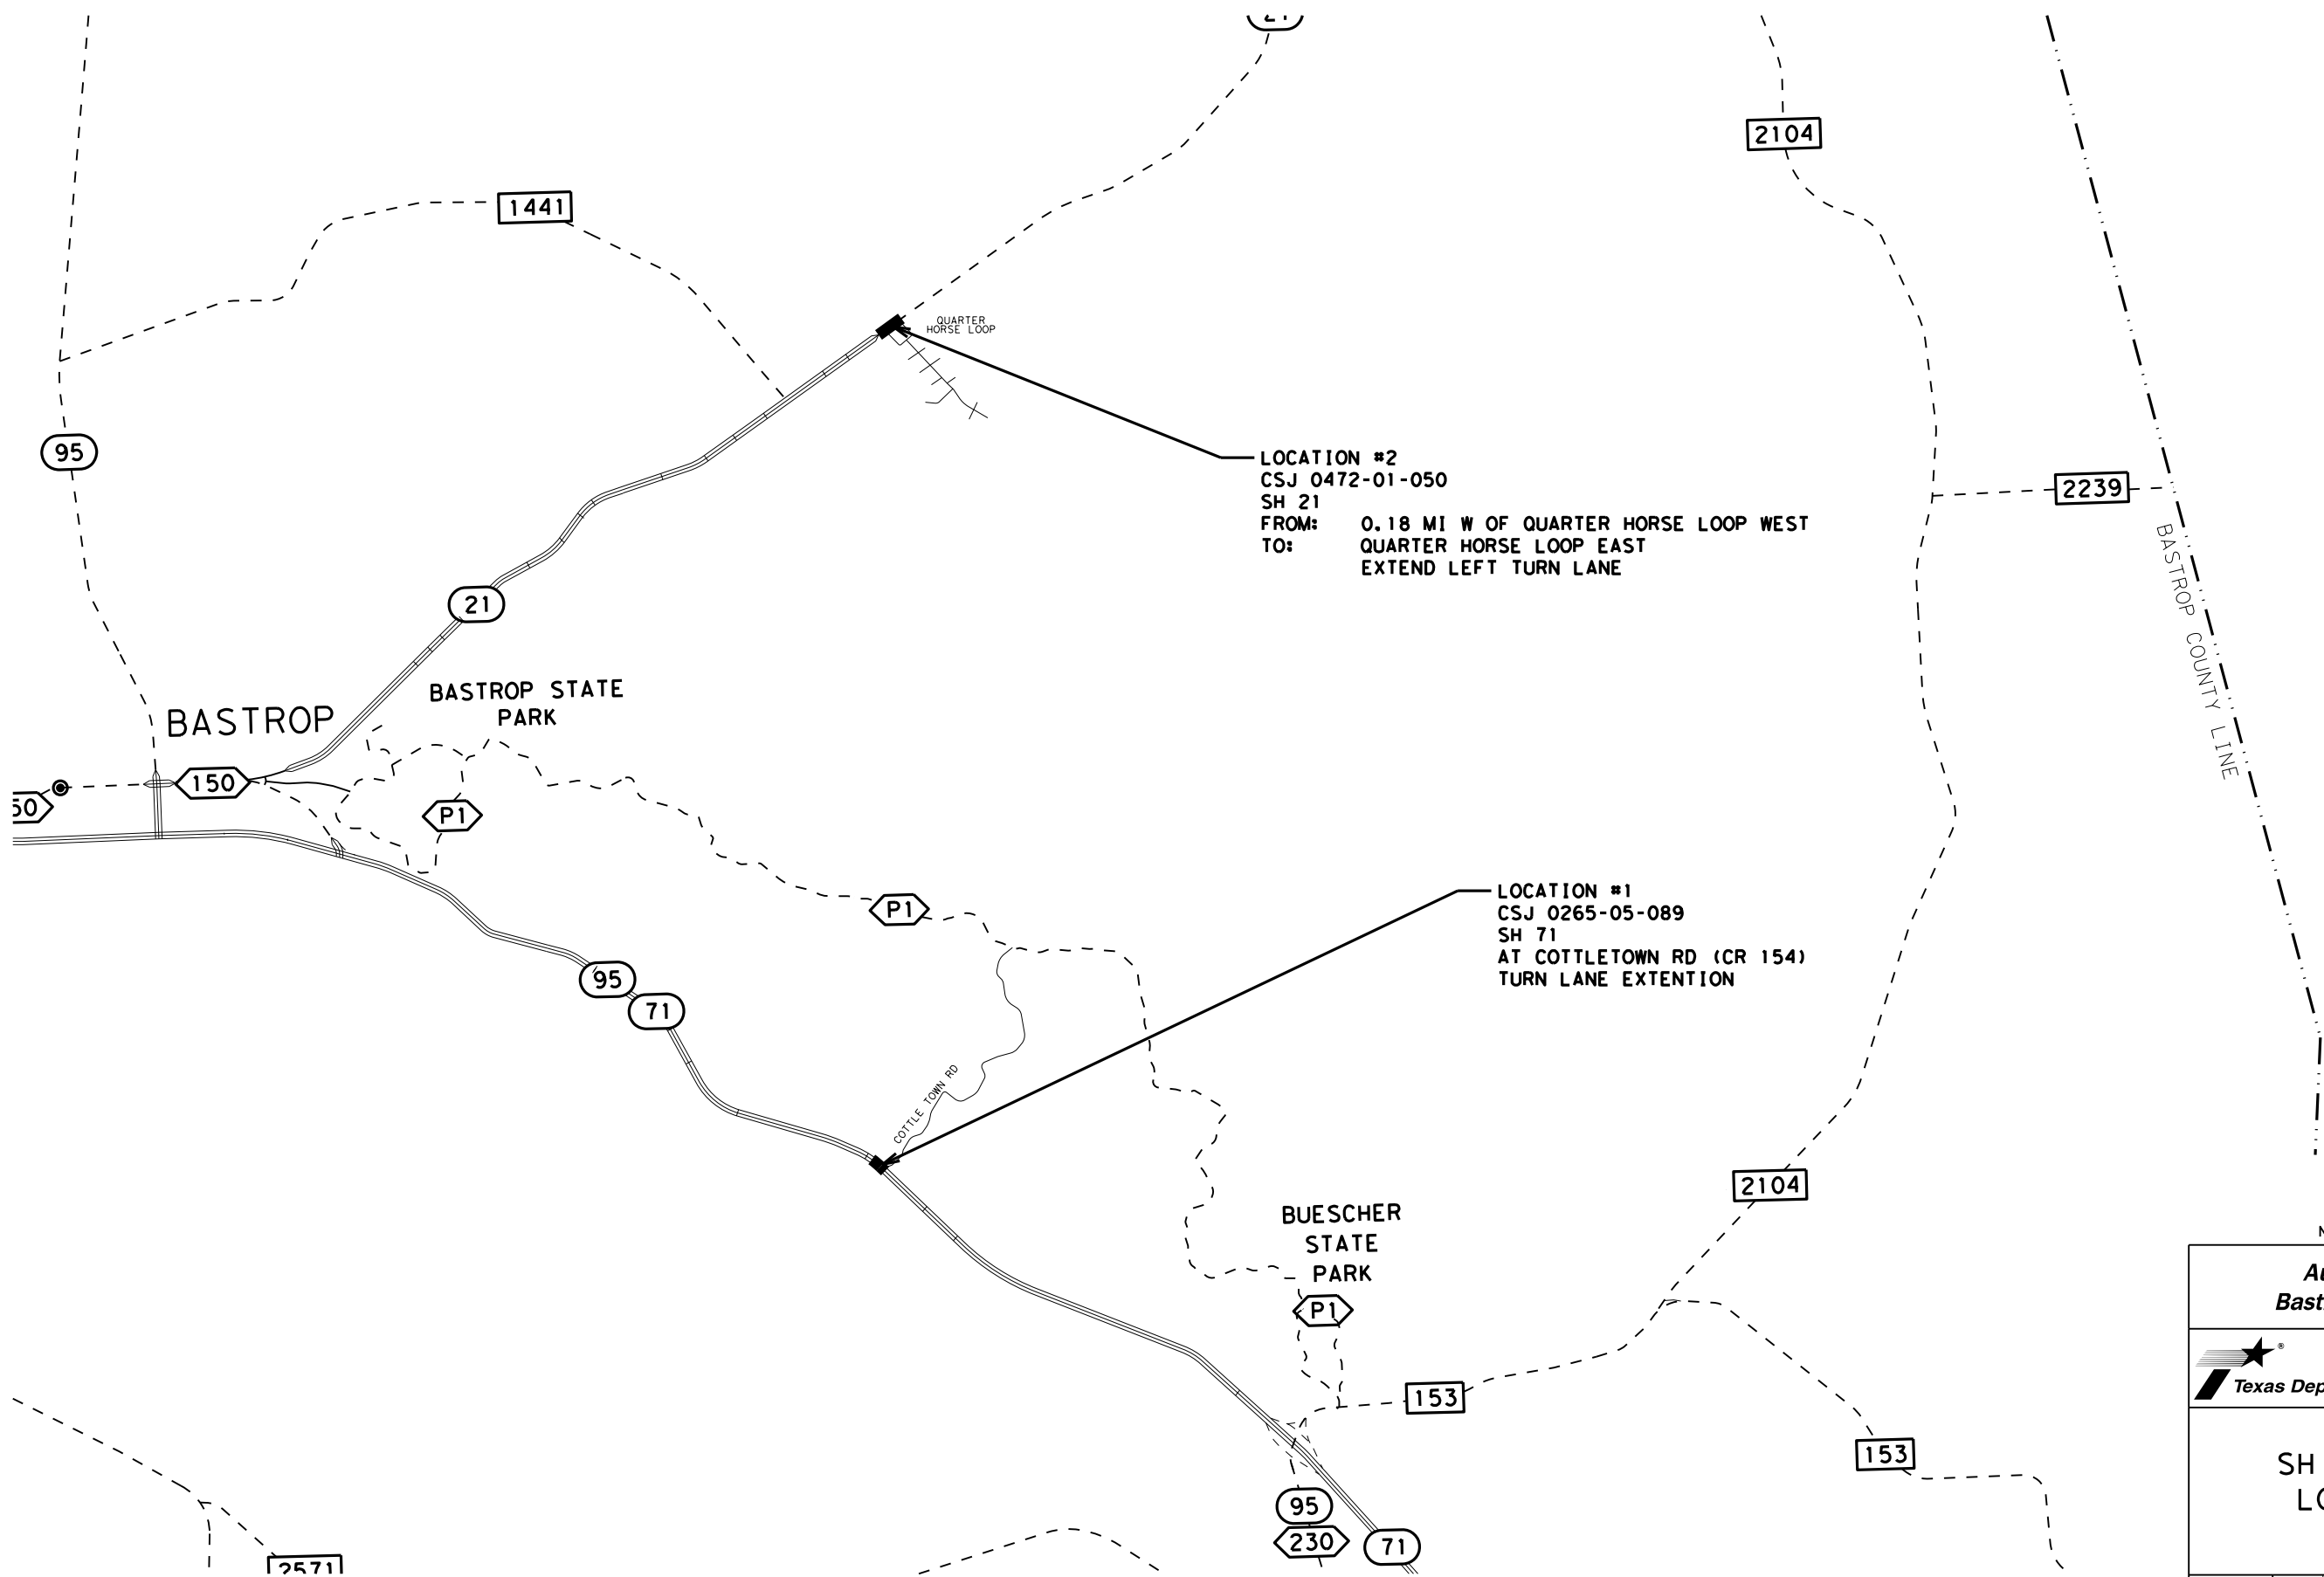

LOCATION #2
 CSJ 0472-01-050
 SH 21
 FROM: 0.18 MI W OF QUARTER HORSE LOOP WEST
 TO: QUARTER HORSE LOOP EAST
 EXTEND LEFT TURN LANE

LOCATION #1
 CSJ 0265-05-089
 SH 71
 AT COTTLETOWN RD (CR 154)
 TURN LANE EXTENTION

NOT TO SCALE

**Austin District
 Bastrop Area Office**



**SH 71, ETC
 LOCATION
 MAP**

© 2022	CONT	SECT	JOB	HIGHWAY
	0265	05	089, ETC	SH 71
	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	03

DATE: \$DATE\$ \$TIME\$
 FILE: \$FILE\$

GENERAL NOTES: Version: December 20, 2022

Item	Description	**Rate
341/3076, 344/3077	Dense-Graded Hot-Mix Asphalt and Superpave	110 LB/SY/IN
3084	Bonding Course	0.09 GAL/SY

** For Informational Purposes Only

GENERAL

Contractor questions on this project are to be addressed to the following individual(s):

Bastrop Area Diana.Schulze@txdot.gov
Bastrop Area Tanli.Sun@txdot.gov

Questions and requests for documents will be accepted via the Letting Pre-Bid Q&A web page. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:
<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

References to manufacturer's trade name or catalog numbers are for the purpose of identification only. Similar materials from other manufacturers are permitted if they are of equal quality, comply with the specifications for this project, and are approved.

If work is performed at Contractor's option, when inclement weather is impending, and the work is damaged by subsequent precipitation, the Contractor is responsible for all costs associated with replacing the work, if required.

Equip all construction equipment used in roadway work with highly visible omnidirectional flashing warning lights.

Provide a smooth, clean sawcut along the existing asphalt or concrete pavement structure, as directed. Consider subsidiary to the pertinent Items.

Construct all manholes/valves to final pavement elevations prior to the placement of final surface. If the manholes/valves are going to be exposed to traffic, place temporary asphalt around the manhole/valve to provide a 50:1 taper. The asphalt taper is subsidiary to the ACP work.

Damage to existing pipes and SET's due to Contractor operations will be repaired at Contractor's expense.

All locations used for storing construction equipment, materials, and stockpiles of any type, within the right of way, will be as directed.

Use of right of way for these purposes will be restricted to those locations where driver sight distance to businesses and side street intersections is not obstructed and at other locations where an unsightly appearance will not exist. The Contractor will not have exclusive use of right of way but will cooperate in the use of the right of way with the city/county and various public utility companies as required.

During evacuation periods for Hurricane events the Contractor will cooperate with Department for the restricting of Lane Closures and arranging for Traffic Control to facilitate Coastal Evacuation Efforts.

ITEM 5 – CONTROL OF THE WORK

Place construction stakes at intervals of no more than 100 ft. This work is subsidiary.

Alignment and Profile.

Unless shown in the plans, profile and alignment data for roadways being overlaid or widened are for design verification only. Provide survey and construct the roadway in accordance with the typical section. Bid items and data may be provided to adjust cross slope and super elevations.

ITEM 6 - CONTROL OF MATERIALS

Give a minimum of 1 business day notice for materials, which require inspection at the Plant.

The area designated as the potential habitat for the Houston Toad will not be allowed as a source for embankment unless approved by the Engineer. The general area is Bastrop County north of the Colorado River and east of SH 95 unless provided in the plans.

For Federally Funded Contracts, comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, by submitting a notarized original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product. Refer to the Buy America Material Classification Sheet, located at the following link, for clarification on material categorization. [Buy America material classification sheet \(txdot.gov\)](#)

ITEM 7 – LEGAL RELATIONS AND RESPONSIBILITIES

Roadway closures during key dates and/or special events are prohibited. See notes for Item 502 for the key dates and/or special events.

Refer to the Environmental Permits, Issues and Commitments (EPIC) plan sheets for additional requirements and permits.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4A
Control: 0265-05-089, ETC

When any abandoned well is encountered, cease construction operations in this area and notify the Engineer who will coordinate the proper plugging procedures. A water well driller licensed in the State of Texas must be used to plug a well.

Perform maintenance of vehicles or equipment at designated maintenance sites. Keep a spill kit on-site during fueling and maintenance. This work is subsidiary.

Maintain positive drainage for permanent and temporary work for the duration of the project. Be responsible for any items associated with the temporary or interim drainage and all related maintenance. This work is subsidiary.

Suspend all activities near any significant recharge features, such as sinkholes, caves, or any other subterranean openings that are discovered during construction or core sampling. Do not proceed until the designated Geologist or TCEQ representative is present to evaluate and approve remedial action.

Locate aboveground storage tanks kept on-site for construction purposes in a contained area as to not allow any exposure to soils. The containment will be sized to capture 150% of the total capacity of the storage tanks.

Work over or near Bodies of Water (lakes, rivers, ponds, creeks, dry waterways, etc.).

Keep on site a universal spill kit adequate for the body of water and the work being performed. Debris is not allowed to fall into the ordinary high-water level (OHWL). Debris that falls into the OHWL must be removed at the end of each work day. Debris that falls into the floodway must be removed at the end of each work week or prior to a rain event. Install and maintain traffic control devices to maintain a navigable corridor for water traffic, except during bridge demo and beam placement. This work is subsidiary.

Obtain written approval from the Engineer for temporary fill or crossings not specifically addressed in the plans. Provide a signed sketch of the location 60 business days prior to begin work at the location. Complete and return any forms provided by TxDOT. Approval of the work is not guaranteed. Unapproved work is not a compensable impact.

Migratory Birds and Bats.

Migratory birds and bats may be nesting within the project limits and concentrated on roadway structures such as bridges and culverts. Remove all old and unoccupied migratory bird nests from any structures, trees, etc. between September 16 and February 28. Prevent migratory birds from re-nesting between March 1 and September 15. Prevention shall include all areas within 25 ft. of proposed work. All methods used for the removal of old nesting areas and the prevention of re-nesting must be submitted to TxDOT 30 business days prior to begin work. This work is subsidiary.

If active nests are encountered on-site during construction, all construction activity within 25 ft. of the nest must stop. Contact the Engineer to determine how to proceed.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4A
Control: 0265-05-089, ETC

Law Enforcement Personnel.

Submit charge summary and invoices using the Department forms.

Patrol vehicles must be clearly marked to correspond with the officer's agency and equipped with appropriate lights to identify them as law enforcement. For patrol vehicles not owned by a law enforcement agency, markings will be retroreflective and legible from 100 ft. from both sides and the rear of the vehicle. Lights will be high intensity and visible from all angles.

No payment will be made for law enforcement personnel needed for moving equipment or payment for drive time to/from the event site. A minimum number of hours is not guaranteed. Payment is for work performed. If the Contractor has a field office, provide an office location for a supervisory officer when event requires a supervising officer. This work is subsidiary.

A maximum combined rate of \$70 per hour for the law enforcement personnel and the patrol vehicle will be allowed. Any scheduling fee is subsidiary per Standard Specification 502.4.2.

Cancel law enforcement personnel when the event is canceled. Cancellation, minimums or "show up" fees will not be paid when cancellation is made 12 hours prior to beginning of the event. Failure to cancel within 12 hours will not be cause for payment for cancellation, minimums, or "show up" time. Payment of actual "show up" time to the event site due to cancellation will be on a case by case basis at a maximum of 2 hours per officer.

Alterations to the cancellation and maximum rate must be approved by the Engineer or pre-determined by official policy of the officers governing authority.

Houston Toad.

This project is subject to the following restrictions/requirements due to the presence of the Houston Toad. The limits of the toad restrictions are for the entire project limits.

Toad habitat boundaries can be found on the Lost Pines Habitat Conservation Plan Area map shown in this contract.

All workers are required to receive up to 1-hour training prior to working on the jobsite. This training will be conducted on site by a TxDOT representative. Provide 72-hour notice to schedule the training.

No work will occur outside of the period of 30 minutes after sunrise to 30 minutes before sunset each day. Night work will require a 48-hour notice prior to beginning of the work to allow the site to be cleared.

TxDOT will clear the project site daily. Notifications when site is clear will be sent to the project staff. Entry or activity within the work area prior to clearance is not allowed.

A sequence of installation of the Amphibian and Reptile Exclusion Fence(AREF) to ensure full site containment and permit compliance must be submitted to TxDOT 96 hours prior to begin installation. AREF shall be paid using construction perimeter fence bid Item.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4B
Control: 0265-05-089, ETC

Install (AREF) around the perimeter of the project to impede toads from entering the project. Installation of the fence shall be completed prior to using equipment on the site. Hand clearing to install the fence is subsidiary.

Install other toad BMPs as designated by the plans or Engineer prior to begin work. BMPs related to the toad will be inspected daily. All deficiencies shall be corrected immediately. Failure to correct a toad related BMP within 24 hours will result in stoppage of work.

Toads may inhabit brush piles during non-work hours; therefore, all vegetation shall be removed at the end of each day to a location outside of toad habit.

If any type of toad, amphibian, or reptile found within the project, suspend work within 75 ft. of the toad and notify TxDOT. TxDOT will be responsible for relocation of a toad.

All standing water not located in a waterway shall be removed prior to sunset.

All spills, of any amount, shall be reported to TxDOT. All parked equipment and refuelling shall remain 200 ft. from a waterway.

The Bermuda grass in the seed mix (PLS/acre) will be replaced with 1 lb. Slender Grama (Dilley), 1 lb. Sideoats Grama (Haskell), 0.5 lb. Hairy Grama (Chaparral), 0.25 lb Hooded Windmill Grass (Mariah), 0.25 lb Sand Dropseed (Borden), and 1 lb. Green Sprangletop.

Visually inspect all open holes and trenches for toads prior to backfill. Holes and trenches shall be covered at the end of each work day or when no work is occurring. This work is subsidiary.

All material imported to the project shall be free of fire ants. All existing material with fire ants shall be treated with a granular product to eliminate the fire ants. This work is subsidiary.

If the total rainfall in a 48-hour period is 2 in. or greater, the Contractor must suspend work for 24 hour or ensure that the TxDOT provided monitors will be onsite on a full-time basis for that 24 hour period. Time suspension will not begin until the rain event has ended, and time will not be charged during the suspension. Time charges during the rain event will be in accordance with the contract. If the suspension does not impact the performance of work for 7 hr. between 7:00 A.M and 6:00 P.M., a working day will be charged. The suspension will be non-compensable.

During Prep right of way tree trimming / tree removal operations, no stockpiling, burning or mulching of vegetation will be allowed on the Right of Way within the Houston Toad Habitat. Mulching activities with a bobcat style brush mulcher or similar equipment, will be allowed as approved by the District Biologist to facilitate installation of AREF. All vegetation shall be removed by the end of each day to a location outside of toad habitat to process for final disposal.

Trees shall be removed mechanically with equipment, such as a track hoe or grad all. capable of pulling the vegetation straight out of the ground for inspection. To facilitate proper inspection, no

County: BASTROP
Highway: SH 71, ETC

Sheet: 4B
Control: 0265-05-089, ETC

dozers, loaders, track loaders, etc. will be allowed to doze down vegetation while preparing the right of way.

Root balls of all vegetation must be removed mechanically. No grinding of stumps will be allowed.

No on or off right of way PSLs for material storage, equipment staging, borrow sites, water sources, etc. will be allowed within the toad habitat boundaries. All materials shall store off the ground and surrounded with AREF. A project PSL shall be enclosed with AREF.

Roadway	Table HT	Limits
FM 2336		East of CR 353 (Herron Trail)
US 290		South of FM 2336 to FM 2104
FM 2104		All
HWY 71		SH 95 to FM 153
SH 95		Old McDade Road to Hwy 71
FM 1441		Peach St. to SH 21
SH 21		SH 95 to Lee County Line
Loop 150		SH 21 to Hwy 71
Park Roads 1A, 1C, 1D, and 1E		All
FM 1624		Highway 21 to Rockdale Street
FM 696		All
FM 112		Milam County Line to FM696
FM 3403		All
HWY 77		HWY 21 N to the Milam County line
Off-system		All - East of SH 95 and North of the Colorado River

ITEM 8 – PROSECUTION AND PROGRESS

Working days will be charged in accordance with 8.3.1.4, “Standard Workweek.”

In accordance with SP 008-005, the latest work start date is the August 1st immediately following the authorization to begin work.

ITEM 100 - PREPARING RIGHT OF WAY

Prep ROW must not begin until accessible trees designated for preservation have been protected, items listed in the EPIC have been addressed, and SW3P controls installed in accessible areas.

Backfill material will be Type B Embankment using ordinary compaction.

Unless shown otherwise in the plans or a designated non-mow area, perform trimming or removal for areas within 30 ft. of edge of pavement under construction. Trim or remove to provide minimum of 5 ft. of horizontal clearance and 7 ft. of vertical clearance for the following: sidewalks, paths, guard fence, rails, signs, object markers, and structures. Trim to provide a minimum of 14 ft. vertical clearance under all trees. This work is subsidiary.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4C
Control: 0265-05-089, ETC

ITEM 110 – EXCAVATION

The Engineer will define unsuitable material.

ITEM 132 – ALL EMBANKMENT

At no time will the retaining wall backfill material exceed the adjacent embankment operation by more than one lift. At no time will the embankment adjacent to the retaining wall backfill exceed the wall backfill by any elevation. Embankment placed over the area of MSE backfill must meet the same backfill requirements for the type specified under Item 423.

The Engineer will define unsuitable material. Material which the Contractor might deem to be unsuitable due to moisture content will not be considered unsuitable material.

Prior to begin embankment of existing area, correct or replace unstable material to a depth of 6 in. below existing grade. Embankment areas will be inspected prior to beginning work.

Rock or broken concrete produced by the project is allowed in earth embankments. The size of the rock or broken concrete will not exceed the layer thickness requirements in Section 132.3.4., “Compaction Methods.” The material will not be placed vertically within 5 ft. of the finished subgrade elevation.

Embankment placed vertically within 5 ft. of the finished subgrade elevation or within the edges of the subgrade and treated with lime, cement, or other calcium based additives must have a sulfate content less than 3000 ppm. Allow 5 business days for testing. Treatment of sulfate material 3000 ppm to 7000 ppm requires 7 days of mellowing and continuous water curing, in accordance TxDOT guidelines for Treatment of Sulfate-Rich Soils and Bases in Pavement Structures (9/2005). Material over 7000 ppm is not allowed.

ITEM 160 – TOPSOIL

Off-site topsoil will have a minimum PI of 25.

No Sandy Loam allowed.

Obtain approval of the actual depth of the topsoil sources for both on-site and off-site sources.

Construct topsoil stockpiles of no more than five (5) feet in height.

It is permissible to use topsoil dikes for erosion control berms within the right of way, as directed.

Seed or track slopes within 14 days of placement.

Salvage topsoil from sites of excavation and embankment. Maximum salvage depth is 6 inches.

Windrowing of topsoil obtained from the Right of Way (ROW) is not allowed.

ITEM 162 – SODDING FOR EROSION CONTROL

Provide common Bermuda. Provide St. Augustine if the adjacent grass is St. Augustine.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4C
Control: 0265-05-089, ETC

ITEM 168 – VEGETATIVE WATERING

Water all areas of project to be seeded or sodded.

Maintain the seedbed in a condition favorable for the growth of grass. Watering can be postponed immediately after a rainfall on the site of ½ inch or greater, but will be resumed before the soil dries out. Continue watering until final acceptance.

Vegetative watering rates and quantities are based on ¼ inch of watering per week over a 3-month watering cycle. The actual rates used and paid for will be as directed and will be based on prevailing weather conditions to maintain the seedbed.

Obtain water at a source that is metered (furnish a current certification of the meter being used) or furnish the manufacturer’s specifications showing the tank capacity for each truck used. Notify the Engineer, each day that watering takes place, before watering, so that meter readings or truck counts can be verified.

ITEM 169 – SOIL RETENTION BLANKETS

Type A blankets containing straw fibers are not allowed. Type B and D blankets shall be a spray type blanket.

ITEM 300s – SURFACE COURSES AND PAVEMENTS

Asphalt season is May 1 thru September 15. Emulsified Asphalt season is April 1 thru October 15. The latest work start date for asphalt season is August 1.

If an under seal is not provided, furnish a tack coat. Apply tack coat at 0.08 GAL/SY (residual). Apply non-tracking tack coat using manufacturer recommend rates.

ITEMS 341, 344, & 3076 THRU 348/3082 - HOT-MIX ASPHALT PAVEMENT

Core holes may be filled with an Asphaltic patching material meeting the requirements of DMS-9203 or with SCM meeting requirements of DMS-9202.

Install transverse butt joints with 50 ft. H: 1 in. V transition from the new ACP to the existing surface. Install a butt joint with 24 in. H: 1 in. V transition from the new ACP to a driveway, pullout or intersection. Saw cut the existing pavement at the butt joints. This work is subsidiary.

Use a device to create a maximum 3H:1V notched wedge joint on all longitudinal joints of 2 in. or greater. This work is subsidiary.

Prior to milling, core the existing pavement to verify thickness. This work is subsidiary.

Ensure placement sequence to avoid excess distance of longitudinal joint lap back not to exceed one day’s production rates.

Submit any proposed adjustments or changes to a JMF before production of the new JMF.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4D
Control: 0265-05-089, ETC

Tack every layer. Do not dilute tack coat. Apply it evenly through a distributor spray bar.

Provide a minimum transition of 10' for intersections, 10' for commercial driveways, and 6' for residential driveways unless otherwise shown on the plans.

Irregularities will require the replacement of a full lane width using an asphalt paver. Replace the entire subplot if the irregularities are greater than 40% of the subplot area.

Lime or an approved anti-stripping agent must be used when crushed gravel is utilized to meet a SAC "A" requirement.

When using RAP or RAS, include the management methods of processing, stockpiling, and testing the material in the QCP submitted for the project. If RAP and RAS are used in the same mix, the QCP must document that both of these materials have dedicated feeder bins for each recycled material. Blending of RAP and RAS in one feeder bin or in a stockpile is not permitted.

Asphalt content and binder properties of RAP and RAS stockpiles must be documented when recycled asphalt content greater than 20% is utilized.

No RAS is allowed in surface courses.

Department approved warm-mix additives is required for all surface mix application when RAP is used. Dosage rates will be approved during JMF approval.

The Hamburg Wheel Test will have a minimum rut depth of 3mm except for SMA with HPG or PG 76.

ITEMS 341/3076 - DENSE-GRADED HOT-MIX ASPHALT

Use the SGC for design and production testing of all mixtures. Design all Type D mixtures as a surface mix, maximum 15% RAP and no RAS.

Contractor may not use a substitute PG binder for 76-22. When using substitute binders, mold specimens for mix design and production at the temperature required for the substitute binder used to produce the HMA.

The Hamburg Wheel minimum number of passes for PG 64 or lower is reduced to 7,000. The Engineer may accept Hamburg Wheel test results for production and placement if no more than 1 of the 5 most recent tests is below the specified number of passes and the failing test is no more than 2,000 passes below the specified number of passes.

ITEM 432 – RIPRAP

Mow strip riprap will be 4 in. and all other riprap will be 5 in. unless otherwise shown on the plans.

Mow strip for cable barrier may be placed monolithically with the barrier foundations if using concrete in accordance with Item 543. Fiber reinforcement is not allowed except in mow strip

County: BASTROP
Highway: SH 71, ETC

Sheet: 4D
Control: 0265-05-089, ETC

for cable barrier if foundation and mow strip are placed monolithically. GFRP is allowed reinforcement for all applications.

Saw-cut existing riprap then epoxy 12 in. long No. 3 or No. 4 bars 6 in. deep at a maximum spacing of 18 in. in each direction to tie new riprap to existing riprap. This work is subsidiary. Provide Type A Grade 3 or 5 flexible base for cement stabilized riprap. Compressive strengths for flexible base are waived.

SGT approach taper, paid for using mow strip item, will be installed using concrete, flexible base coated with SS-1 at a rate of 0.12 GAL/SY, or HMA Type B/C/D. Placement will be ordinary compaction and does not require placement using an asphalt paver.

ITEM 467 - SAFETY END TREATMENT

Field adjust pipe end to maintain the necessary slope. Field cutting of pipe end is allowed. Coat all metal field cuts or exposed reinforcement with asphalt paint.

ITEM 496 - REMOVING STRUCTURES

Submit a demolition plan to the Engineer. Have the plan signed and sealed by a licensed professional engineer when the structure will continue to accommodate traffic after removal has begun and the removal impacts any part of the structure below the deck or riding surface. If applicable, the plan must detail requirements for meeting the U.S. Army Corps of Engineers' Section 404 Permit. The demolition plan must detail handling of roadway and waterway traffic. Waterway traffic must be maintained at all times unless a closure is approved by the Engineer.

No debris is allowed to fall into a body of water. Debris that falls into the water must be removed at the end of each work day. Debris that falls into the floodway must be removed at the end of each work week or prior to a rain event.

ITEM 502 - BARRICADES, SIGNS, AND TRAFFIC HANDLING

<u>Table 2</u>		
<u>Roadway</u>	<u>Limits</u>	<u>Allowable Closure Time</u>
SH 71	At Cottle Town Rd (CR 154)	30 min after sunrise to 30 min before sunset
SH 21	From 0.18 MI W of Quarter Horse Loop W To Quarter Horse Loop East	30 min after sunrise to 30 min before sunset

For roadways without defined allowable closure times, nighttime lane closures will be allowed from 8 P to 6 A. Unless stated, daytime or Friday night lane closures will not be allowed and one lane in each direction will remain open at all times for all roadways.

Full closures only allowed Friday night thru Monday morning for bridge beam installation, bridge demolition, or OSB truss removal/installation. Full closures only allowed for roadways with frontage roads or if a designated detour route is provided in the plans.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4E
Control: 0265-05-089, ETC

No closures will be allowed on the weekends, working day prior, and working day after the National Holidays defined in the Standard Specifications, Good Friday, and Easter weekend. Closures the Sunday of the Super Bowl will not be allowed from 1 P to 11 P.

No closures will be allowed on Friday and the weekends for projects within 20 miles of Formula 1 at COTA, ACL Fest, SXSW, ROT Rally, UT home football games (includes games not on a Friday or weekend), sales tax holiday, Dell Match Play (includes Thursday), Rodeo Austin, or other special events that could be impacted by the construction. All lanes will be open by noon of the day before these special events.

To account for directional traffic volumes, begin and end times of closures may be shifted equally by the Engineer. The closure duration will remain. Added compensation is not allowed.

Submit an emailed request for a lane closure (LCN) to TxDOT. The email will be submitted in the format provided. Receive concurrence prior to implementation. Submit a cancellation of lane closures a minimum of 18 hours prior to implementation. Blanket requests for extended periods are not allowed. Max duration of a request is 2 weeks prior to requiring resubmittal.

Provide 2 hour notice prior to implementation and immediately upon removal of the closure.

Submit the request a minimum of 48 hours prior to the closure and by the following deadline immediately prior to the closure: 11A on Tuesday or 11A on Friday. For all roadways: Submit request for traffic detours and full roadway closures 168 hours prior to implementation. Submit request for nighttime work 96 hours to implementation date.

Cancellations of accepted closures (not applicable to full closures or detours) due to weather will not require resubmission in accordance with the above restrictions if the work is completed during the next allowable closure time.

Closures that conflict with adjacent contractor will be prioritized according to critical path work per latest schedule. Conflicting critical path or non-critical work will be approved for first LCN submitted. Denial of a closure due to prioritization or other reasons will not be reason for time suspension, delay, overhead, etc.

Meet with the Engineer prior to lane closures to ensure that sufficient equipment, materials, devices, and workers will be used. Take immediate action to modify current and future traffic control, if at any time the queue becomes greater than 20 minutes.

Consider inclement weather prior to implementing the lane closures. Do not set up traffic control when the pavement is wet.

Cover, relocate, or remove existing small, large, and overhead signs that conflict with traffic control. Cover large and overhead signs to remain using latest standard TS-CD. This work is subsidiary.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4E
Control: 0265-05-089, ETC

Install all permanent signs, delineation, and object markers required for the operation of the roadway before opening to traffic. Use of temporary mounts is allowed or may be required until the permanent mounts are installed or not impacted by construction. Maintain the temporary mounts. This work is subsidiary.

Place a 28-inch cone, meeting requirements of BC (10), on top of foundations that have protruding studs. This work is subsidiary.

Vertical panels used on roadways with speed limit 55mph or greater must be round in shape or have a self-righting mechanism. The “flat” or “oblong” shaped vertical panels are not allowed.

A series of sequential flashing warning lights, per BC(7), must be installed in a merging taper for long term stationary TCP. This includes all TCP setups, such as those shown on the plans or TCP setups per the standards.

Edge condition treatment types must be in accordance with the TxDOT standard. Installation and removal of a safety slope is subsidiary.

To determine a speed limit or an advisory speed limit, submit a request to TxDOT 60 business days prior to manufacture of the sign.

The Contractor Force Account “Safety Contingency” that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor’s Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

ITEM 504 - FIELD OFFICE AND LABORATORY

All labs and offices will include cleaning at least once a week. The cleaning will include sweeping and mopping of floors, cleaning the toilet and lavatory, and emptying wastebaskets. Space heaters are not considered adequate heating.

Projects with HMAC, furnish a Type D structure for the Engineer’s exclusive use. The structure will include high speed internet service with WIFI signal, one desk, two chairs, and one file cabinet. Provide a minimum of three 120-volt circuits with 20-amp breakers and at most two grounded convenience outlets per circuit.

ITEM 506 - TEMPORARY EROSION, SEDIMENTATION, AND ENV CONTROLS

If SW3P plan sheets are not provided, place the control measures as directed.

Install, maintain, remove control measures in areas of the right of way utilized by the Contractor that are outside the limits of disturbance required for construction. Permanently stabilize the area. This work is subsidiary.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4F
Control: 0265-05-089, ETC

Erosion control measures must be initiated immediately in areas where construction activities have ceased and will not resume for a period exceeding 14 calendar days. Vertical track all exposed soil, stockpiles, and slopes. Re-track after each rain event or every 14 days, whichever occurs first. Sheep foot roller is allowed for vertical tracking. This work is subsidiary.

Unless a specific pay item is provided in the plans, the installation of the 6:1 or flatter for RFD side slopes in the safety zone will be subsidiary to pertinent bid items.

ITEM 508 – CONSTRUCTING DETOURS

Detour typical section must match the adjacent roadway section, unless shown on the plans.

Flexible base will be Type A Grade 5 placed using ordinary compaction. Base compressive strengths are waived for roadways not listed in Item 502, Table 1.

ITEMS 528, 529, 530, 531, & 536 – MISCELLANEOUS CONSTRUCTION

If roots are encountered verify with the Engineer before accommodating or removing 2 in. diameter or larger roots. Root removal must be in accordance with Section 752.4.2. Roots may remain in the bedding or base. For improvements within 6 in. of a root, the concrete thickness may be reduced by 1 in. and the bedding increased by 1 in. to minimize impacts to the roots. Adjust bedding and surface profile to provide a 1 in. bedding cushion around the roots. The surface profile may be adjusted to the extent allowed by ADA. This work is subsidiary.

ITEM 530 – INTERSECTIONS, DRIVEWAYS, AND TURNOUTS

Notify property owners at least 48 hr. before beginning work on their driveway. Provide a list of each notification and contact before each closure. Only close driveways for reconstruction if duration and alternate access are approved. Install and maintain material across a work zone as temporary access. This work is subsidiary.

For ACP or SURF TREAT, the pavement structure will match the adjacent roadway unless detailed on the plans. HMA, including surface, may use a maximum allowable quantity of 40% RAP and 5% RAS for private driveways, public driveways for 2-lane roadways or smaller, and turnouts. Blending of 2 or more sources is allowed.

For CONC, the pavement structure will be 6 in. thick and have 3 in. flexible base bedding unless detailed on the plans.

ITEM 543 – CABLE BARRIER SYSTEM

Before installation stake end terminal locations for approval. Changes to the location may be necessary to accommodate slopes or other obstructions in the field. This work is subsidiary.

Retain all materials. Existing materials that are structurally sound may be reused. All reused material shall be from this project and in compliance with current standards.

Revise cross slopes as necessary to provide a slope in compliance with the barrier standard. Reuse of excavated material from installation of the barrier and mow strip is subsidiary. Use of additional material shall be paid using embankment.

County: BASTROP
Highway: SH 71, ETC

Sheet: 4F
Control: 0265-05-089, ETC

ITEM 644 – SMALL ROADSIDE SIGN ASSEMBLIES

Triangular slip base that use set screws to secure the post will require 1 of the set screws to penetrate the post by drilling a hole in the post at the location of the screw. All set screws shall be treated with anti-seize compound.

ITEM 658 – DELINEATOR AND OBJECT MARKER ASSEMBLIES

Installation and maintenance of portable CTB reflectors will be subsidiary to the barrier.

Flexible posts YFLX and WFLX must be tubular in shape. The “flat” flexible posts are not allowed.

ITEM 662 - WORK ZONE PAVEMENT MARKINGS

Notify the Engineer at least 24 hours in advance of work for this item.

Maintain removable and short-term markings daily. Remove within 48 hours after permanent striping has been completed.

Item 668 is not allowed for use as Item 662.

Roadways with existing profile pavement markings or rumble strips must supplement work zone solid lines with traffic buttons spaced at 12 in. Traffic buttons used to supplement the work zone markings will be paid by the each in addition to the work zone item.

ITEM 666 - RETROREFLECTORIZED PAVEMENT MARKINGS

Notify the Engineer at least 24 hr. before beginning work.

Place longitudinal markings nightly for IH 35 main lanes or roadways with AADT greater than 100,000. Use of temporary flexible reflective roadway marker tabs is subsidiary and at the Contractor’s option. Replace missing or damaged tabs nightly. If using tabs, place longitudinal markings weekly by 5 AM Friday for all weekday work and by 5 AM Monday for all weekend work. Failure to maintain tabs or place longitudinal markings by deadline will require nightly placement of longitudinal markings.

Place longitudinal markings no later than 7 calendar days after placement of the surface for roadways with AADT greater than 20,000.

When the raised portion of a profile marking is placed as a separate operation from the pavement marking, the raised portion must be placed first then covered with TY I.

When using black shadow to cover existing stripe apply a non-retroreflective angular abrasive bead drop. The marking color shall be adjusted to resemble the pavement color. If Item 677 is not used prior to placement of black shadow, scrape the top of the marking with a blade or large piece of equipment unless surface is a seal coat. The scraping of the marking is subsidiary.

ITEM 677 - ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS

Dispose of removed materials and debris at locations off the right of way.

Elimination using a pavement marking will not be allowed in lieu of methods listed in specification.

Remove pavement markings by a hydro-blasting method. Flail milling will be allowed when total quantity of removal on concrete surfaces is less than 1000 ft.

Strip seal is only method allowed on seal coat surface unless project includes placement of a new surface. If total quantity of removal on a seal coat surface is less than 2000 ft., elimination using a pavement marking is allowed if a test section is approved by the Engineer. Test section shall demonstrate the thermo marking color matches the existing pavement color.

Use a TRAIL or a non-retroreflective paint to cover stripe remnants that remain after elimination. The test requirements for these materials are waived. The paint color shall be adjusted to resemble the existing pavement color. Installation and maintenance is subsidiary.

ITEM 3084 – BONDING COURSE

The minimum application rates are listed in Table BC. Miscellaneous Tack is allowed for use with dense-graded Type B HMA. If a tack bid item is not provided, use bonding course item.

The target shear bond strengths are listed in Table BCS. The informational test cores shall be taken once a shift for first 5 lots of placement or a change to placement method of bonding course, bonding material, or hot mix material. The remaining informational test cores shall be taken once every 3 lots for surface mix. Informational tests are not required for non-surface mix beyond the first 5 lots unless there is a change to placement method of bonding course, bonding material, or hot mix material. Results from these informational tests will not be used for specification compliance.

Table BC

Material	Minimum Application Rate (gal. per square yard)
TRAIL – Emulsified Asphalt	0.06
TRAIL – Hot Asphalt	0.12
Spray Applied Underseal Membrane	0.10

Table BCS (For Informational Tests)

Material	Target Shear Bond Strength (Tex-249-F psi)
SMA – Stone-Matrix Asphalt	60.0
PFC – Permeable Friction Course	N/A
All Other Materials	40.0



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0265-05-089

DISTRICT Austin
HIGHWAY SH 21, SH 71

COUNTY Bastrop

CONTROL SECTION JOB				0265-05-089		0472-01-050		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00177175		A00177174			
COUNTY				Bastrop		Bastrop			
HIGHWAY				SH 71		SH 21			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL		
	100-6002	PREPARING ROW	STA	10.560		16.315		26.875	
	110-6001	EXCAVATION (ROADWAY)	CY	2,700.000		958.000		3,658.000	
	132-6003	EMBANKMENT (FINAL)(ORD COMP)(TY B)	CY	1,675.000		4,330.000		6,005.000	
	150-6002	BLADING	HR	20.000		20.000		40.000	
	160-6003	FURNISHING AND PLACING TOPSOIL (4")	SY	2,700.000		3,600.000		6,300.000	
	164-6001	BROADCAST SEED (PERM) (RURAL) (SANDY)	SY	2,700.000		3,600.000		6,300.000	
	164-6071	BROADCAST SEED (TEMP)(WARM OR COOL)	SY	2,700.000		3,600.000		6,300.000	
	168-6001	VEGETATIVE WATERING	MG	25.000		50.000		75.000	
	169-6002	SOIL RETENTION BLANKETS (CL 1) (TY B)	SY			3,600.000		3,600.000	
	169-6004	SOIL RETENTION BLANKETS (CL 1) (TY D)	SY	2,700.000				2,700.000	
	400-6006	CUT & RESTORING PAV	SY			160.000		160.000	
	432-6045	RIPRAP (MOW STRIP)(4 IN)	CY	35.000				35.000	
	464-6003	RC PIPE (CL III)(18 IN)	LF			230.000		230.000	
	467-6363	SET (TY II) (18 IN) (RCP) (6: 1) (P)	EA			12.000		12.000	
	496-6004	REMOV STR (SET)	EA			3.000		3.000	
	496-6007	REMOV STR (PIPE)	LF			140.000		140.000	
	500-6001	MOBILIZATION	LS			1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	4.000				4.000	
	506-6038	TEMP SEDMT CONT FENCE (INSTALL)	LF	40.000		40.000		80.000	
	506-6039	TEMP SEDMT CONT FENCE (REMOVE)	LF	40.000		40.000		80.000	
	506-6041	BIODEG EROSN CONT LOGS (INSTL) (12")	LF			150.000		150.000	
	506-6043	BIODEG EROSN CONT LOGS (REMOVE)	LF			150.000		150.000	
	530-6005	DRIVEWAYS (ACP)	SY			360.000		360.000	
	543-6001	CABLE BARRIER SYSTEM (TL-3)	LF	700.000				700.000	
	543-6019	CABLE BARRIER TERMINAL SECTION (TL-3)	EA	2.000				2.000	
	543-6021	REMOVE CABLE BARRIER	LF	700.000				700.000	
	560-6011	MAILBOX INSTALL-S (TWW-POST) TY 4	EA			3.000		3.000	
	560-6012	MAILBOX INSTALL-D (TWW-POST) TY 4	EA			1.000		1.000	
	644-6068	RELOCATE SM RD SN SUP&AM TY 10BWG	EA			7.000		7.000	
	658-6096	INSTL DEL ASSM (D-DY)SZ 1(YFLX)SRF	EA	5.000				5.000	
	662-6001	WK ZN PAV MRK NON-REMOV (W)4"(BRK)	LF			812.000		812.000	
	662-6004	WK ZN PAV MRK NON-REMOV (W)4"(SLD)	LF			3,263.000		3,263.000	
	662-6014	WK ZN PAV MRK NON-REMOV (W)12"(SLD)	LF	350.000				350.000	
	662-6016	WK ZN PAV MRK NON-REMOV (W)24"(SLD)	LF			50.000		50.000	
	662-6032	WK ZN PAV MRK NON-REMOV (Y)4"(BRK)	LF			812.000		812.000	
	662-6039	WK ZN PAV MRK NON-REMOV (Y)12"(SLD)	LF			325.000		325.000	
	662-6060	WK ZN PAV MRK REMOV (W)4"(BRK)	LF	3,312.000				3,312.000	



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0265-05-089

DISTRICT Austin
HIGHWAY SH 21, SH 71

COUNTY Bastrop

CONTROL SECTION JOB				0265-05-089		0472-01-050		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00177175		A00177174			
COUNTY				Bastrop		Bastrop			
HIGHWAY				SH 71		SH 21			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL		
	662-6063	WK ZN PAV MRK REMOV (W)4"(SLD)	LF	3,312.000				3,312.000	
	662-6071	WK ZN PAV MRK REMOV (W)8"(SLD)	LF	1,200.000				1,200.000	
	666-6036	REFL PAV MRK TY I (W)8"(SLD)(100MIL)	LF	550.000				550.000	
	666-6042	REFL PAV MRK TY I (W)12"(SLD)(100MIL)	LF	350.000				350.000	
	666-6167	REFL PAV MRK TY II (W) 4" (BRK)	LF	1,656.000				1,656.000	
	666-6300	RE PM W/RET REQ TY I (W)4"(BRK)(100MIL)	LF			812.000		812.000	
	666-6303	RE PM W/RET REQ TY I (W)4"(SLD)(100MIL)	LF			3,263.000		3,263.000	
	666-6342	REF PROF PAV MRK TY I(W)4"(SLD)(100MIL)	LF	1,656.000				1,656.000	
	666-6345	REF PROF PAV MRK TY I(Y)4"(SLD)(100MIL)	LF	1,656.000				1,656.000	
	672-6006	REFL PAV MRKR TY I-A	EA			812.000		812.000	
	672-6007	REFL PAV MRKR TY I-C	EA			812.000		812.000	
	677-6001	ELIM EXT PAV MRK & MRKS (4")	LF	8,280.000		3,263.000		11,543.000	
	677-6003	ELIM EXT PAV MRK & MRKS (8")	LF	2,400.000				2,400.000	
	3076-6003	D-GR HMA TY-B PG64-22 (EXEMPT)	TON	523.000		958.000		1,481.000	
	3076-6070	D-GR HMA TY-D PG 76-22 SAC-B (EXEMPT)	TON	168.000		280.000		448.000	
	3084-6001	BONDING COURSE	GAL	138.000		229.000		367.000	
	5116-6001	AMPHIBIAN/REPTILE EXCLUSION FENCE INST	LF	540.000		3,263.000		3,803.000	
	5116-6002	AMPHIBIAN/REPTILE EXCLUSION FENCE REM	LF	540.000		3,263.000		3,803.000	
	6001-6002	PORTABLE CHANGEABLE MESSAGE SIGN	EA			3.000		3.000	
	6185-6002	TMA (STATIONARY)	DAY			62.000		62.000	
	6185-6005	TMA (MOBILE OPERATION)	DAY			10.000		10.000	
	7251-6001	Subsurface Util Locate (Outside Rdbed)	EA			1.000		1.000	
	18	LAW ENFORCEMENT: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS			2.000		2.000	
		EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS			2.000		2.000	
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS			2.000		2.000	

TABULATION OF PROJECTS

REF NO.	COUNTY	HWY NO.	CONTROL	LIMITS	TOTAL LENGTH		TY-D PG76-22 AREA (SY)	TY-B PG76-22 AREA (SY)
					MI	FT		
*1	BASTROP	SH 71	0265-05-089	AT COTTLETOWN RD (CR 154)	0.200	1,056.00	1,525	1,584
*2	BASTROP	SH 21	0472-01-050	FROM: 0.18 MI W OF QUARTER HORSE LOOP E TO: QUARTER HORSE LOOP EAST	0.309	1,631.52	2,538	2,901
TOTALS					0.509	2,687.52	4,063	4,485

* FOR CONTRACTORS INFORMATION ONLY

BASIS OF ESTIMATE - SH 71

ITEM	DESCRIPTION	RATE	QUANTITY	UNIT
3076	D-GR HMA TY-D PG 76-22 SAC-B(EXEMPT)	110 LB/IN/SY **	168	TON
3076	D-GR HMA TY-B PG 64-22(EXEMPT)	110 LB/IN/SY **	523	TON
3084	BONDING COURSE	0.09 GAL/SY **	138	GAL

** RATES MAY BE VARIED BY THE ENGINEER, SEE INDIVIDUAL PROJECT LISTINGS FOR SQUARE YARDS.

BASIS OF ESTIMATE - SH 21


ITEM	DESCRIPTION	RATE	QUANTITY	UNIT
3076	D-GR HMA TY-D PG 76-22 SAC-B(EXEMPT)	110 LB/IN/SY **	280	TON
3076	D-GR HMA TY-B PG 64-22(EXEMPT)	110 LB/IN/SY **	958	TON
3084	BONDING COURSE	0.09 GAL/SY **	229	GAL

** RATES MAY BE VARIED BY THE ENGINEER, SEE INDIVIDUAL PROJECT LISTINGS FOR SQUARE YARDS.

NOTES:

- SH 21:
- NET INCREASES IN MATERIAL SHALL BE AT A MINIMUM TO PREVENT DISPLACEMENT OF DRAINAGE ON SH 71 IN FEMA AREAS FROM STA 10+00 TO STA 15+72
 - EXISTING MAILBOX TURNOUTS, DRIVEWAY, INTERSECTIONS ARE TO BE OVERLAYED WITH 2" TY-D PG 76-22 THIS IS INCLUDED IN OVERALL TY-D ASPHALT, TY-B ASPHALT AND BONDING COURSE QTY.
 - ADD WHITE & YELLOW PROFILE EDGELINE WITH TY-I AS DIRECTED.
 - WK ZN STRIPE QTY INCLUDES:
1 FULL SET FOR TY-D PG 76-22 & MAILBOX TURNOUT
 - SEE PROJECT SEQUENCE SHEET FOR MORE INFORMATION.
 - SEE PROPOSED TYPICAL FOR MORE DETAIL.

GENERAL NOTES:
SEE LOCATION SPECIFIC INFORMATION PERTAINING TO WORK RESTRICTIONS IN ITEM 502 OF THE GENERAL NOTES.




DocuSigned by:
Diana K. Schulze, P.E.
6775445255A3482...
1/25/2023

**Austin District
Bastrop Area Office**

**SH 71
QUANTITY SUMMARY
SHEET**


© 2022	CONT	SECT	JOB	HIGHWAY
	0265	05	089, ETC	SH 71
	DIST	COUNTY		SHEET NO.
	AUS	BASTROP		6

CK: DW: CK: DW:

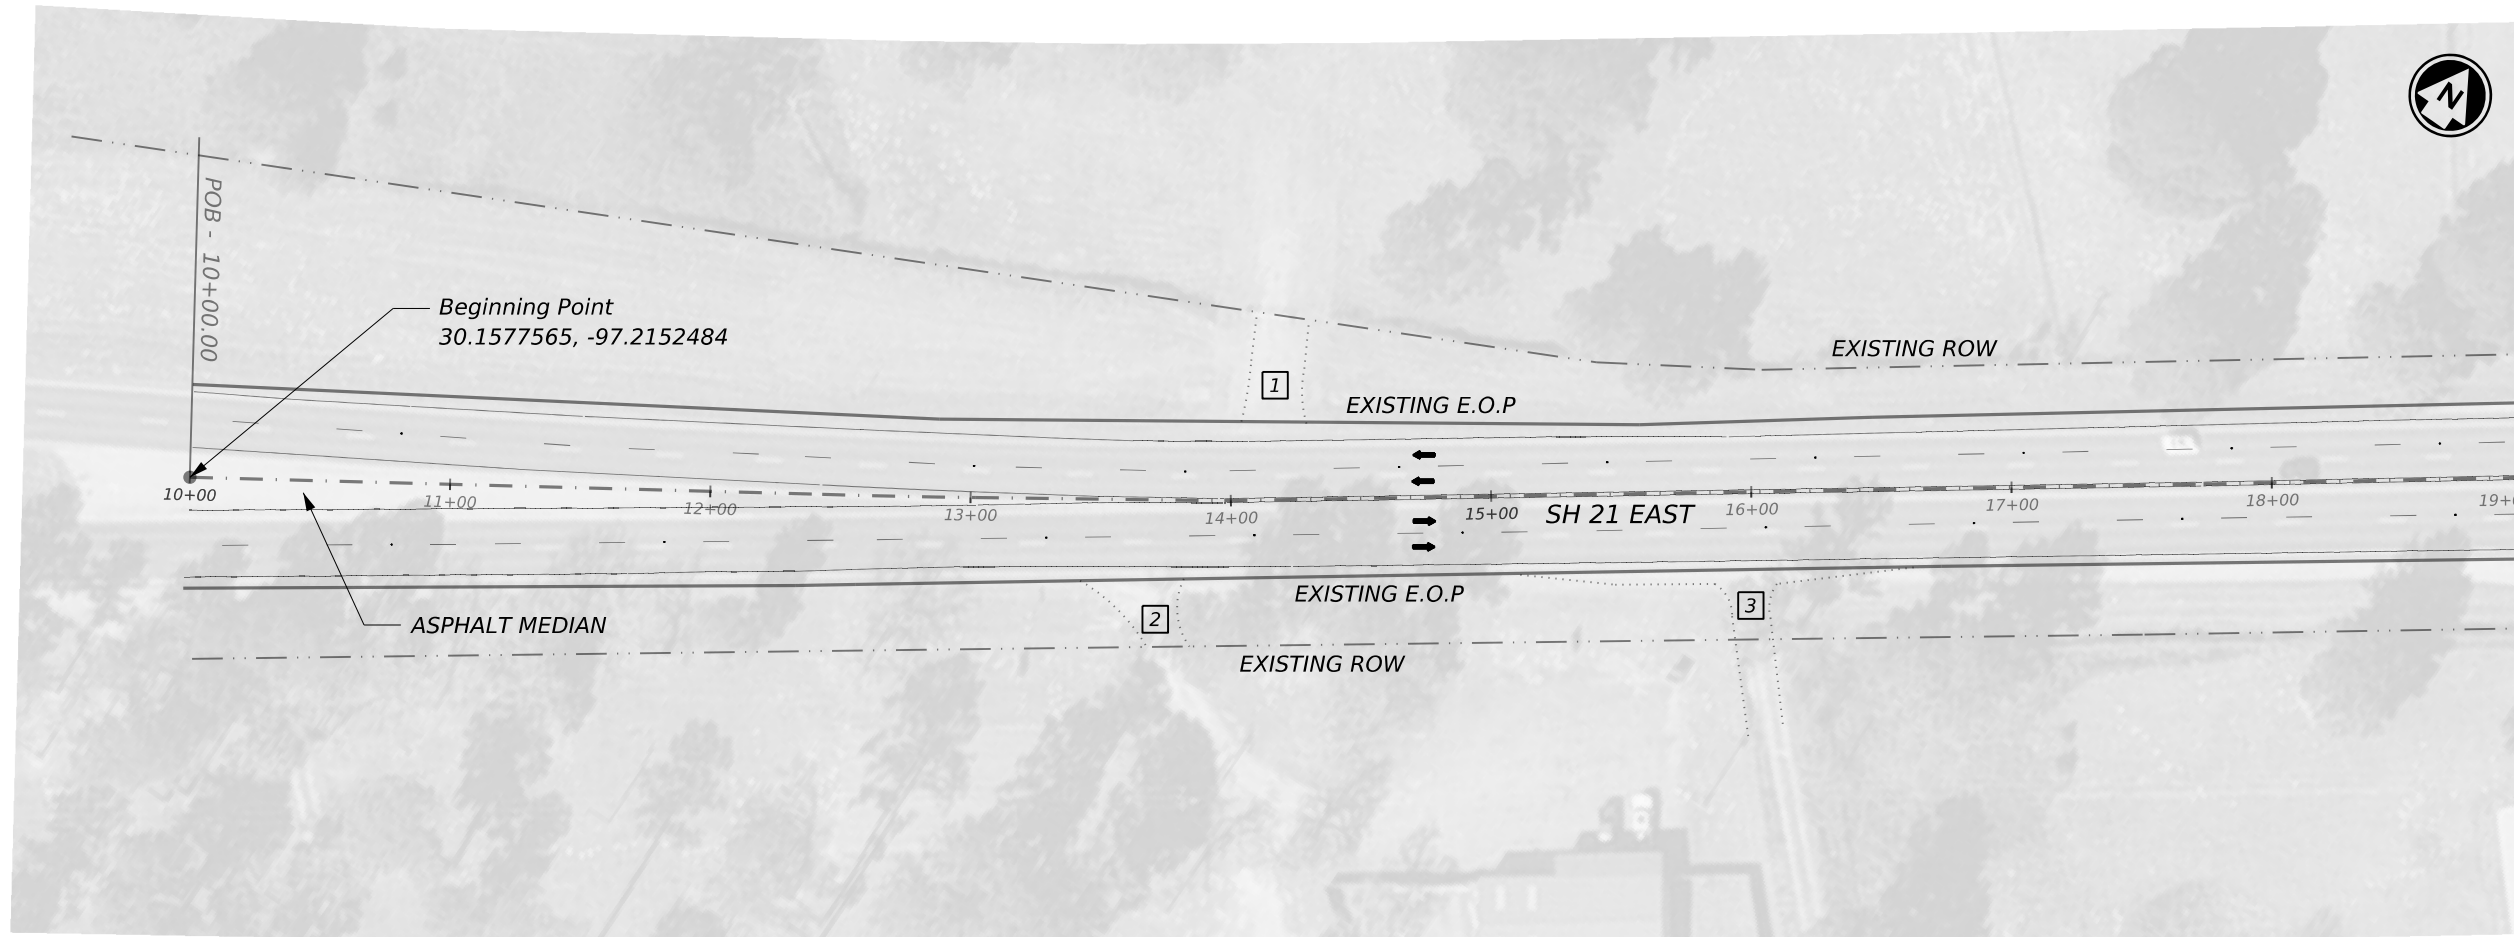

LEGEND	
←	TRAFFIC FLOW
[X]	DRIVEWAY NUMBER

MATCHLINE STA. 19+00

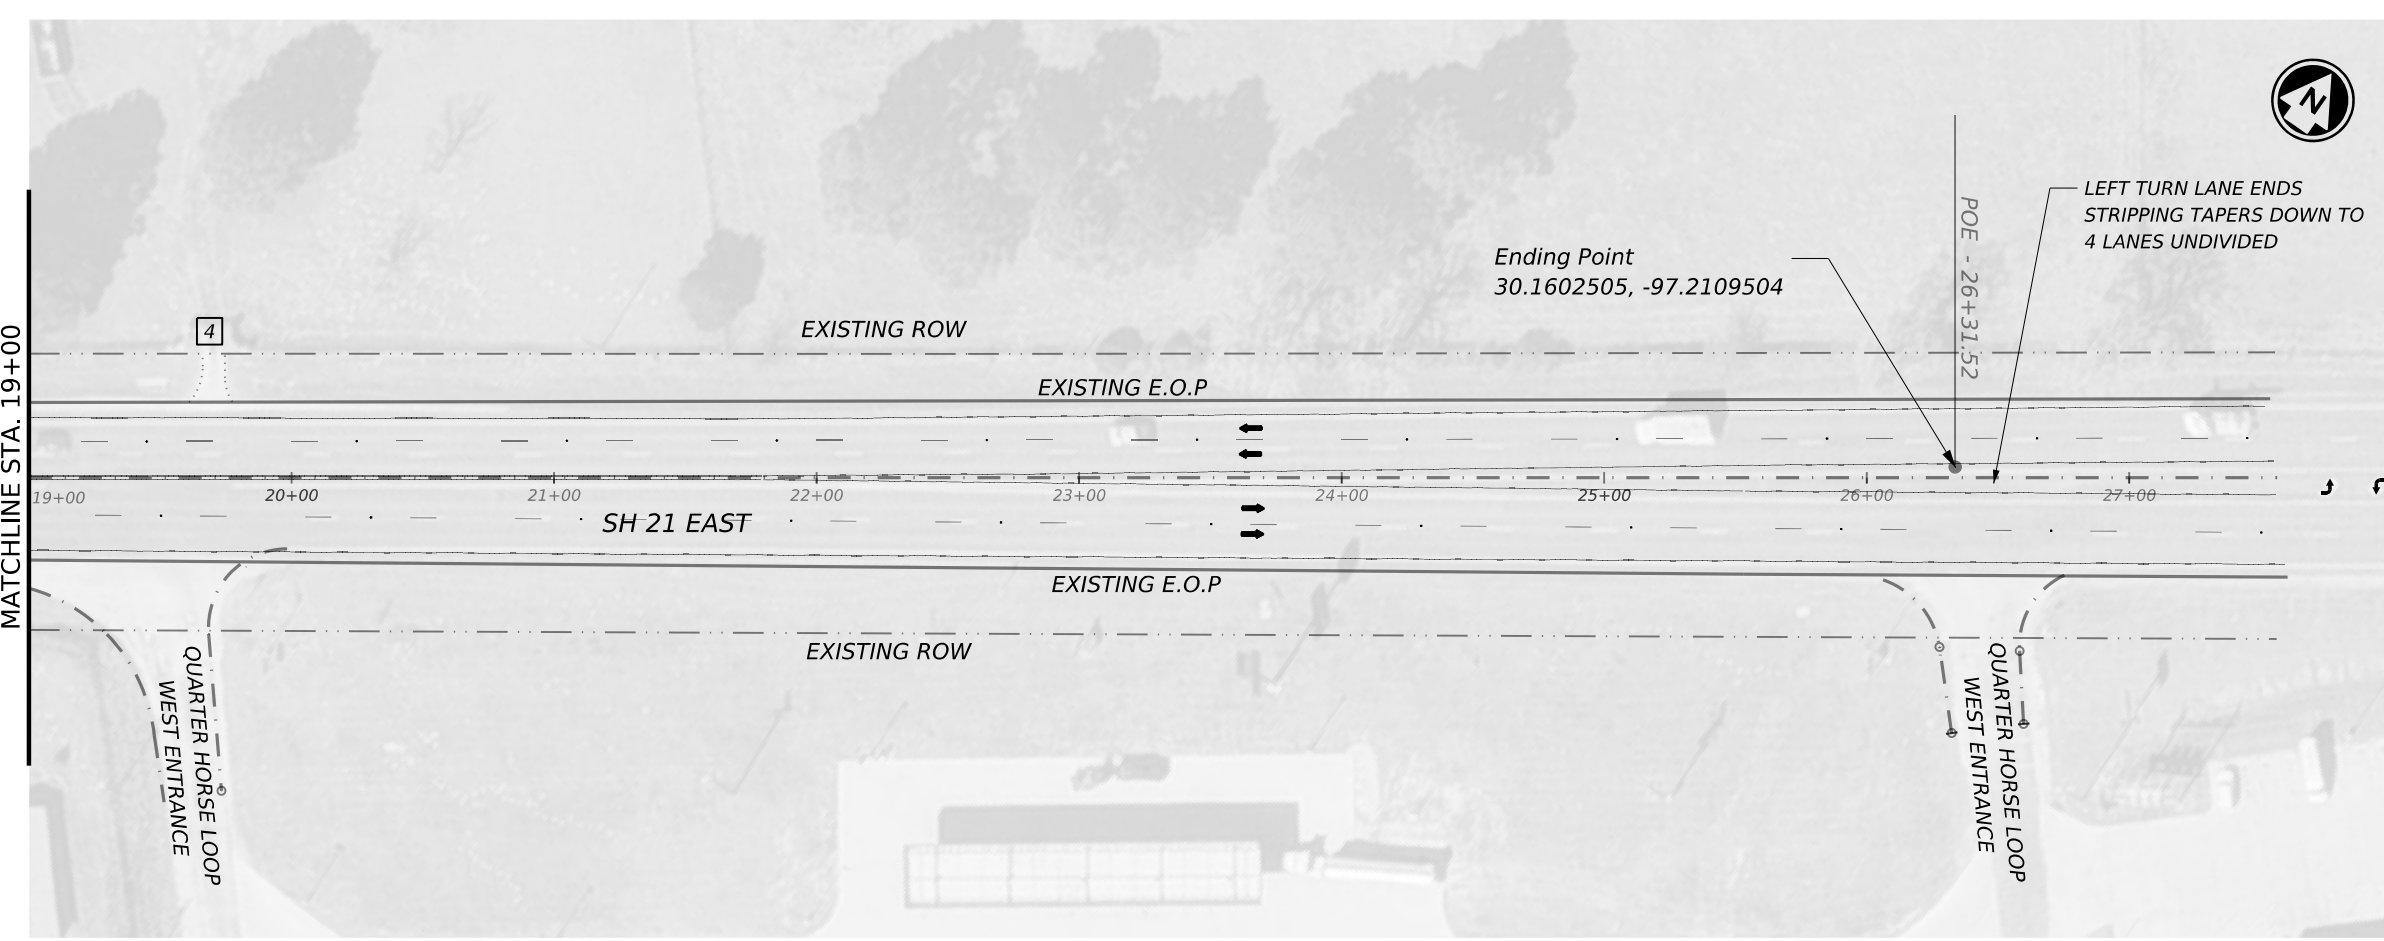

DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/5/2023

NOTE: THE INTERSECTION OF SH 21 & CARDINAL DR IS LOCATED 445' EAST FROM THE END OF PROJECT



SH 21
PLAN SHEET
EXISTING LAYOUT


SHEET 1 OF 50

CONT	SECT	JOB	HIGHWAY
0265	05	089,ETC	SH 21
DIST	COUNTY	SHEET NO.	
AUS	BASTROP	7	

DATE: \$DATE\$ TIME: \$TIME\$ FILE: \$SPEC\$ DRAWING NAME


DW: _____
 CK: _____
 DW: _____
 CK: _____

LEGEND	
←	TRAFFIC FLOW
X	DRIVEWAY NUMBER

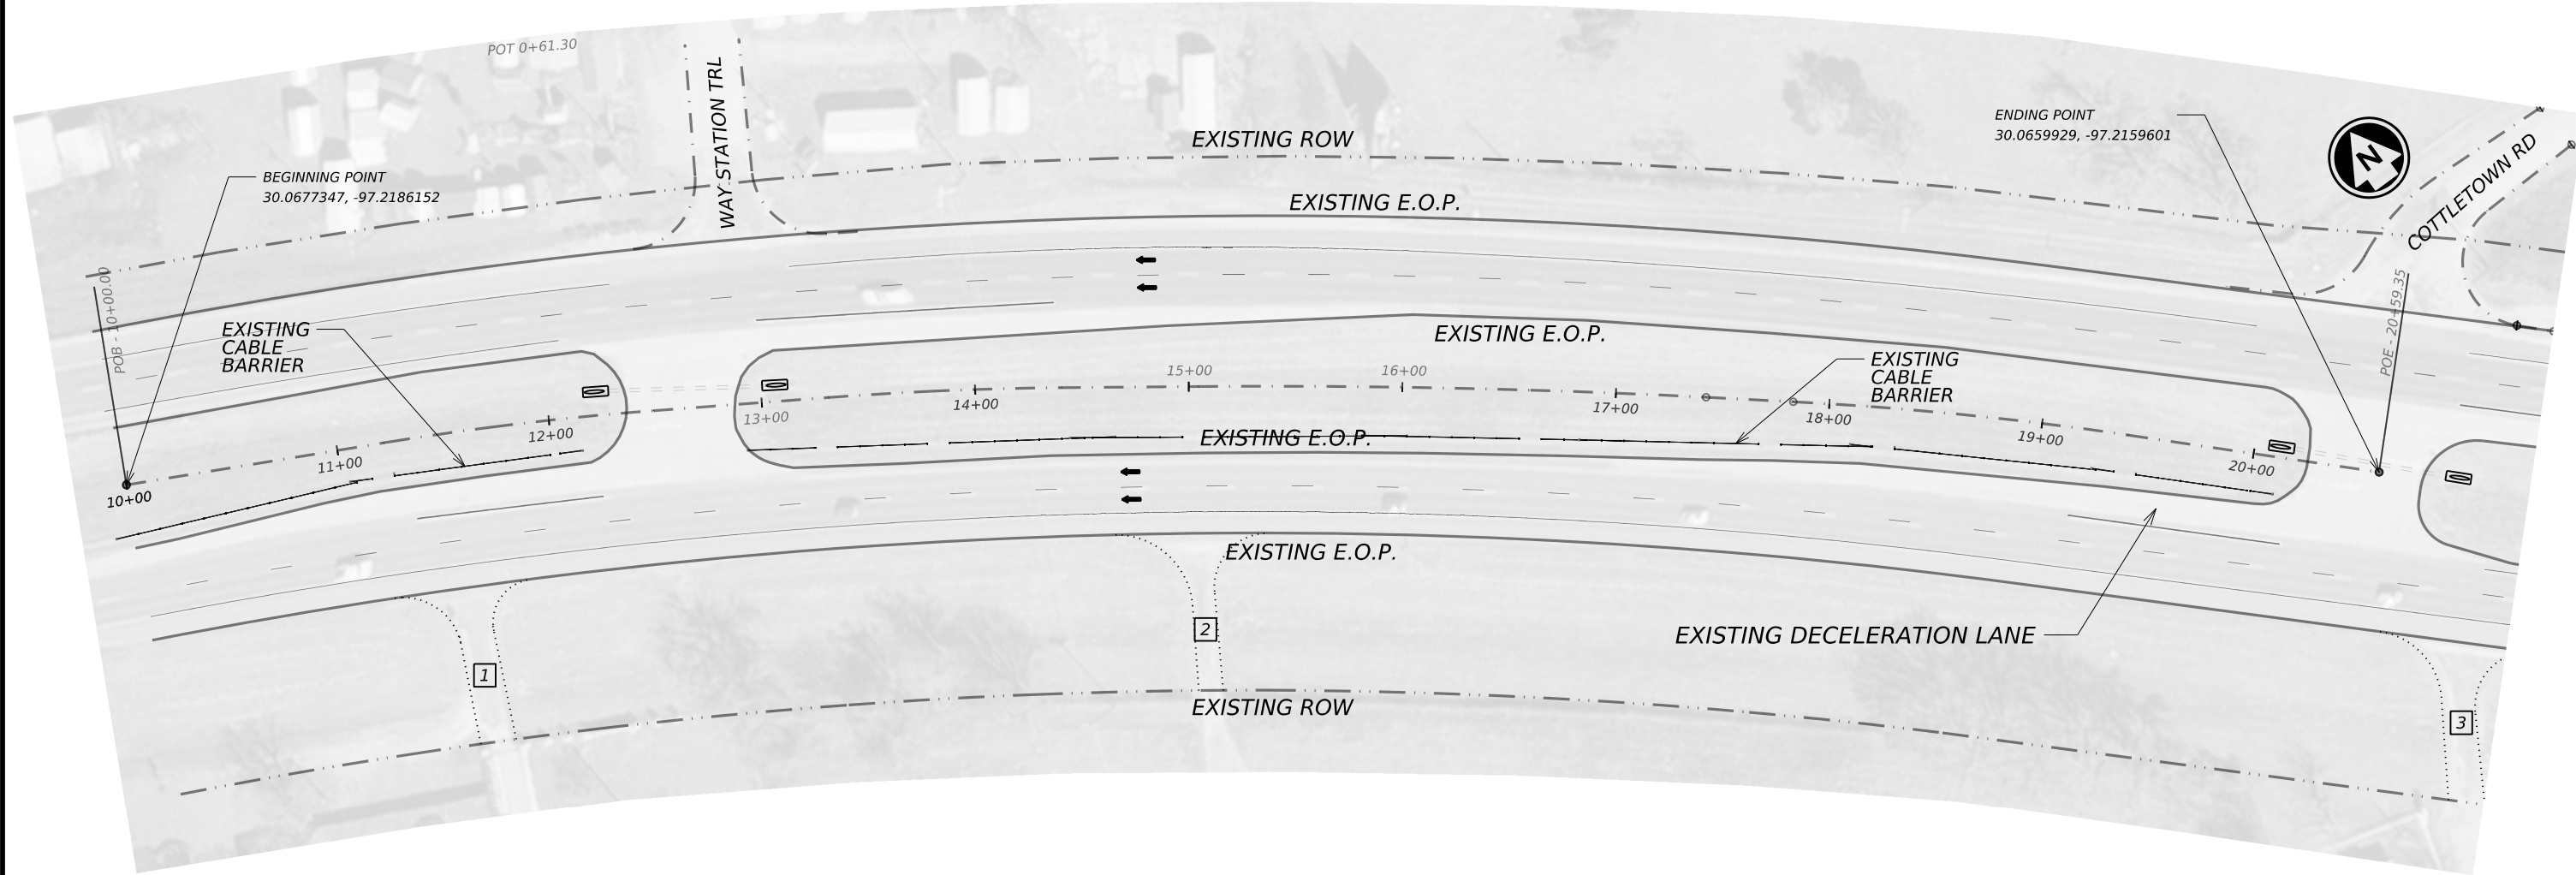

DATE: \$DATE\$ TIME: \$TIME\$
 FILE: \$SPECIMEN_NAME\$


NOTE: EXISTING DECELERATION LANE ISN'T LONG ENOUGH TO ACCOMMODATE THE INCREASE IN THRU TRAFFIC AT THE CROSSOVER AT COTTLETOWN ROAD. THIS PROJECT PROPOSES TO EXTENDING THE DECELERATION LANE ALONG THE MEDIAN STARTING FROM THE EXISTING CROSSOVER AT WAY STATION TRL, AND CARRYING IT THROUGH UNTIL IT MERGES WITH THE EXISTING LANE.



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/5/2023


SH 71, ETC EXISTING LAYOUT			
SHEET 1 OF 1			
CONT	SECT	JOB	HIGHWAY
0265	05	089, ETC	SH 71, ETC
DIST	COUNTY		SHEET NO.
AUS	BASTROP		8

CK: DW: CK: DN:

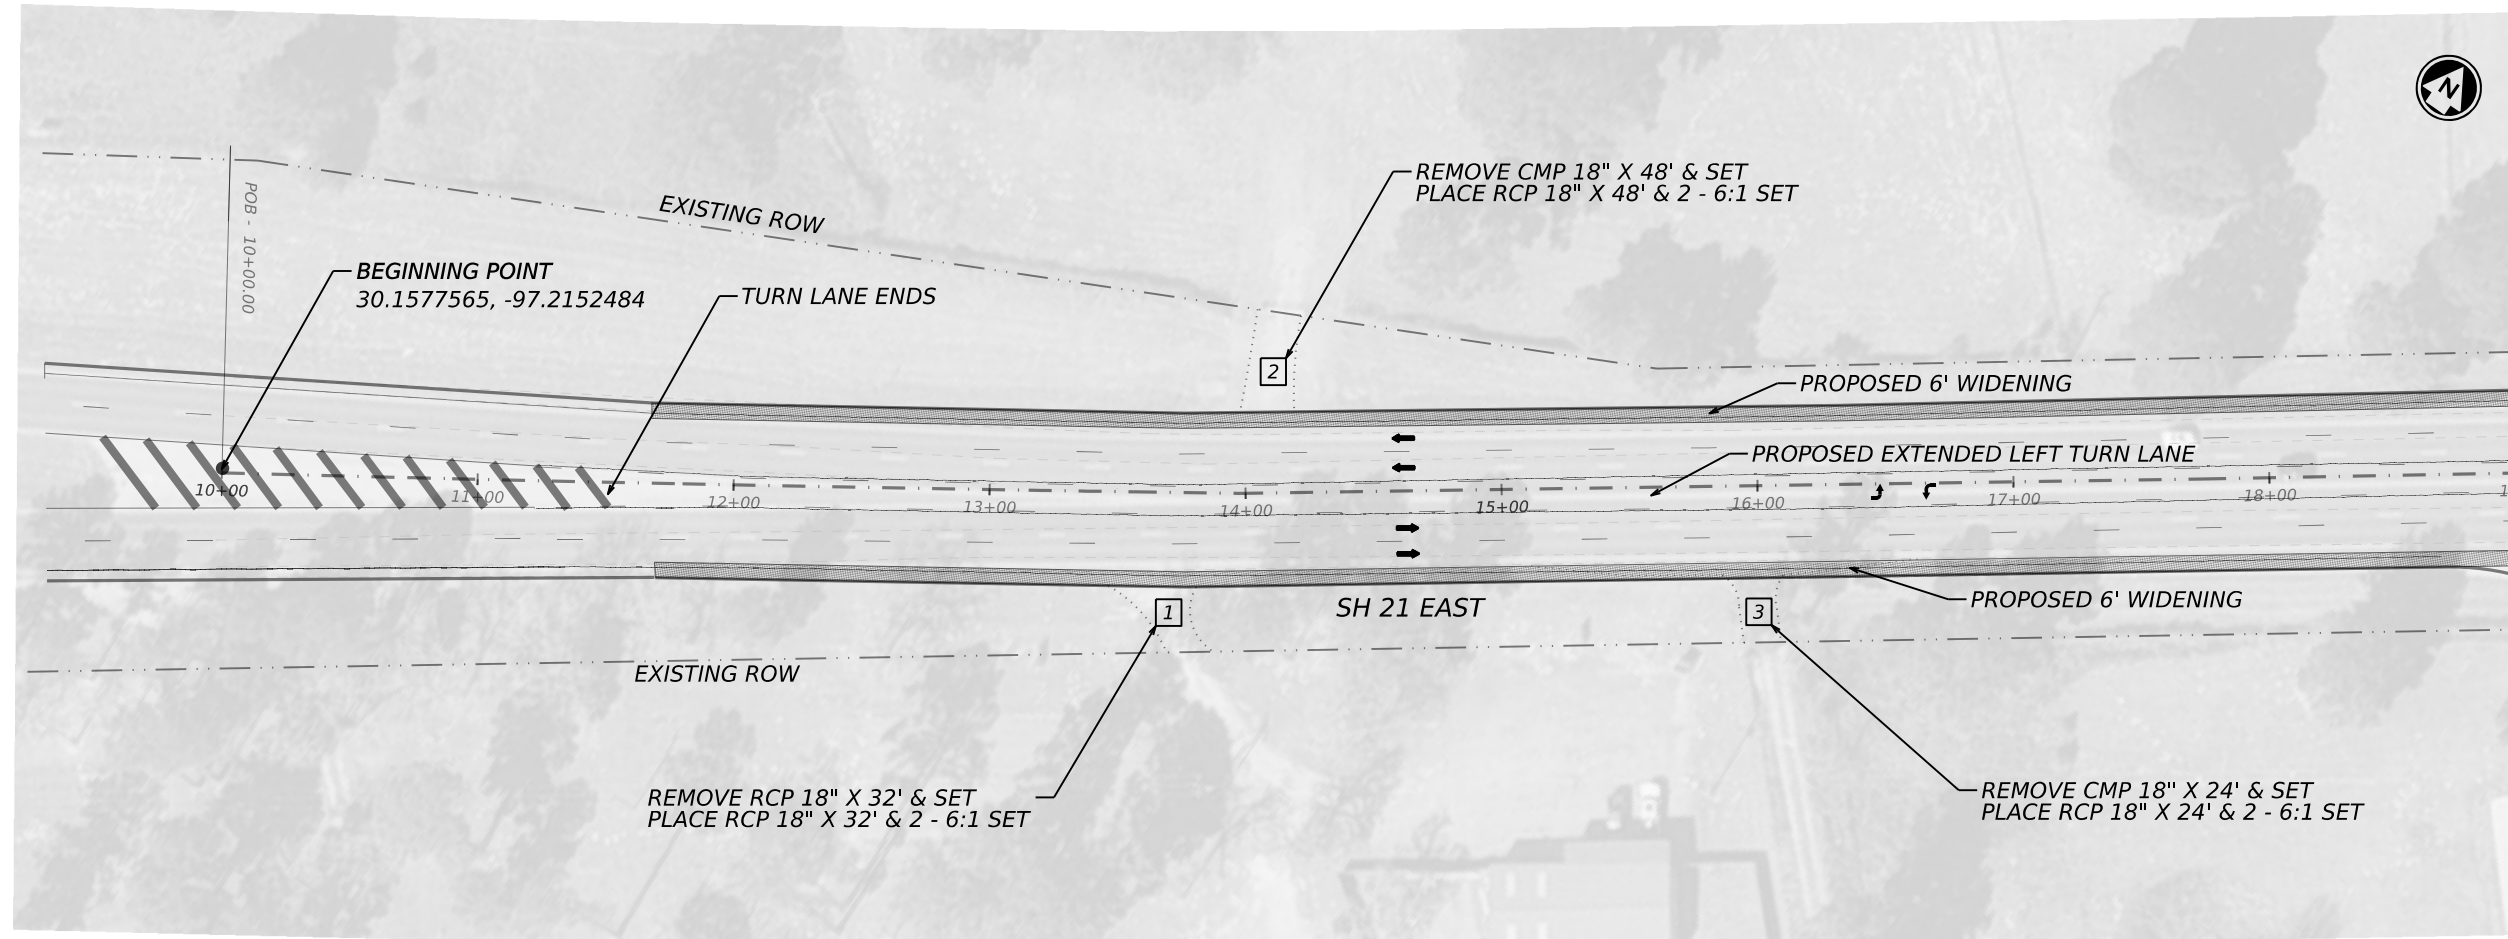


LEGEND	
	TRAFFIC FLOW
	DRIVEWAY NUMBER

MATCHLINE STA. 19+00.00



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

- NOTE:
- FOR MORE DETAILS ON DRAINAGE STRUCTURES SEE SUMMARY OF RCP PARALLEL DRAINAGE STRUCTURES IN THIS PLAN SET
 - OVERLAY ENTIRE DRIVEWAYS 1 THRU 4 USING TY D, SAME AS ROADWAY. TY D HAS BEEN INCLUDED IN THE QUANTITIES FOR THIS ITEM. (SEE STANDARD DWMB-22(AUS) FOR DETAILS)
 - OVERLAY ALL MAILBOX TURNOUTS USING TY D, SAME AS ROADWAY. TY D HAS BEEN INCLUDED IN THE QUANTITIES FOR THIS ITEM. (SEE STANDARD DWMB-22(AUS) FOR DETAILS)

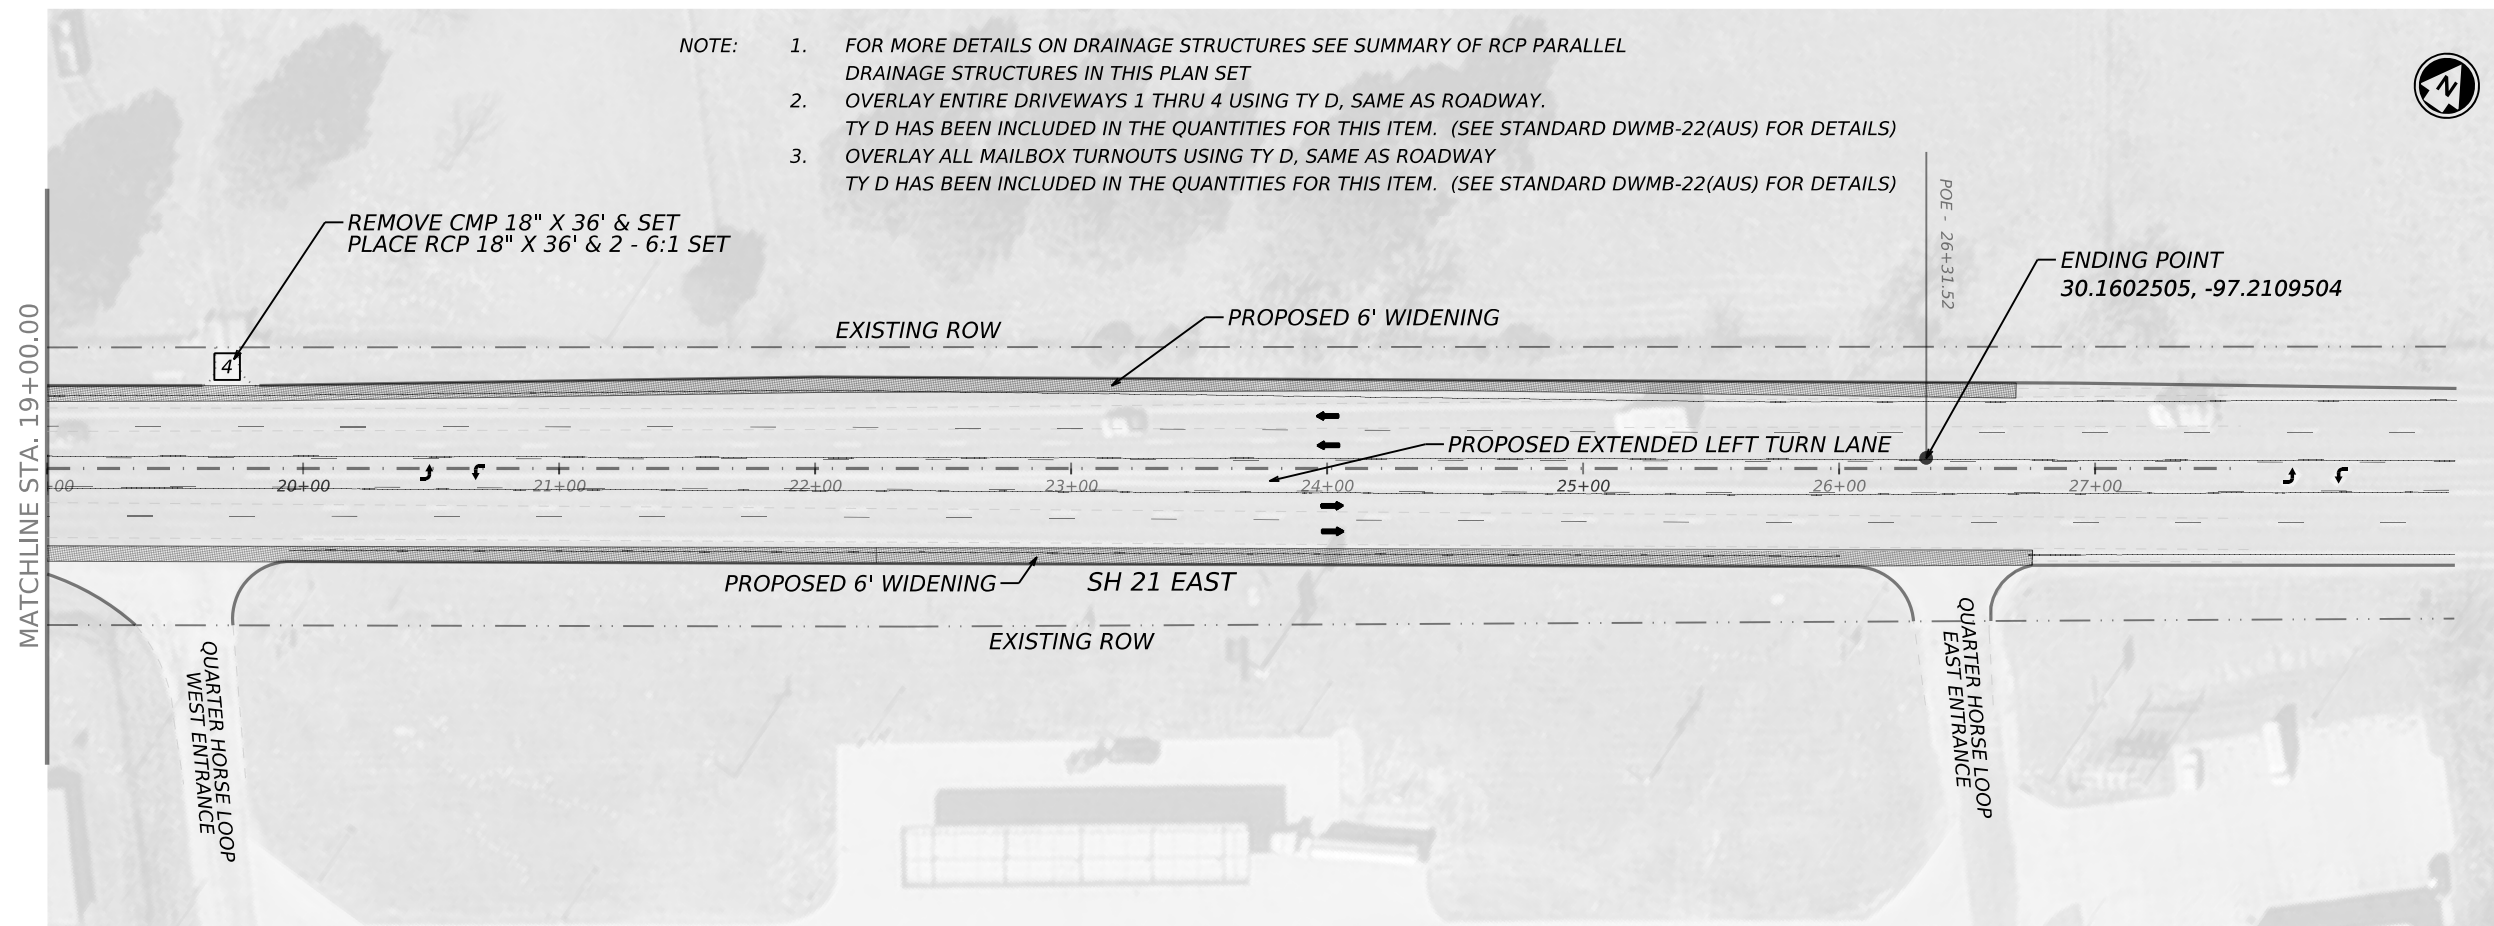

NOTE: THE INTERSECTION OF SH 21 & CARDINAL DR IS LOCATED 445' EAST FROM THE END OF PROJECT



SH 21
PLAN SHEET
PROPOSED LAYOUT


SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0265	05	089,ETC	SH 21
DIST	COUNTY	SHEET NO.	
AUS	BASTROP	9	

DATE: \$DATE\$
 FILE: \$FILES\$

DW: _____
 CK: _____
 DW: _____
 CK: _____

LEGEND	
←	TRAFFIC FLOW
[X]	DRIVEWAY NUMBER

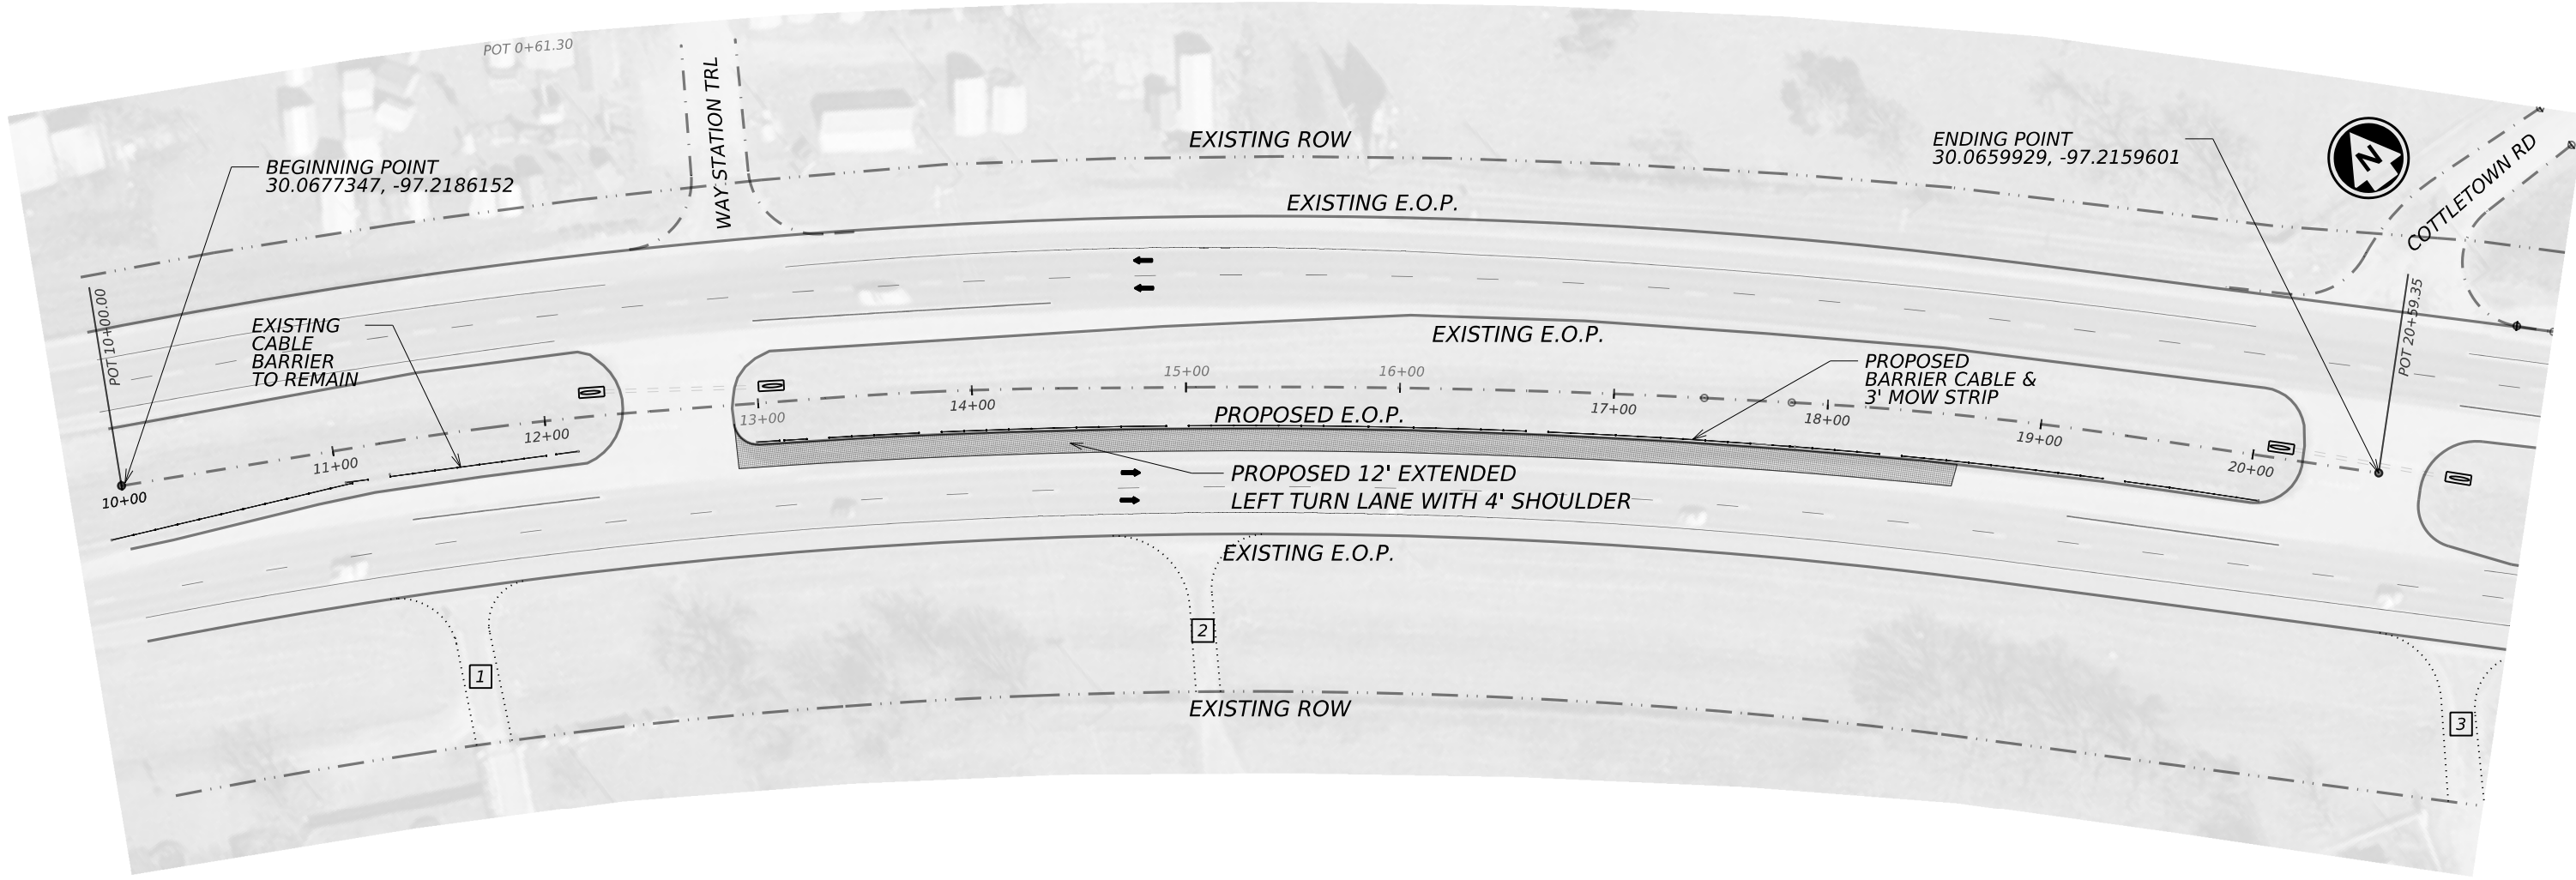

DATE: \$DATE\$ TIME: \$TIME\$
 FILE: \$SPECIMEN NAME\$




NOTE: NO CHANGE FOR DRIVEWAYS NOTED ON SH 71




DocuSigned by:
Diana K. Schulze P.E.

6775445255A3482...
 1/5/2023

SH 71, ETC PROPOSED LAYOUT			
SHEET 1 OF 1			
CONT	SECT	JOB	HIGHWAY
0265	05	089, ETC	SH 71, ETC
DIST	COUNTY		SHEET NO.
AUS	BASTROP		10

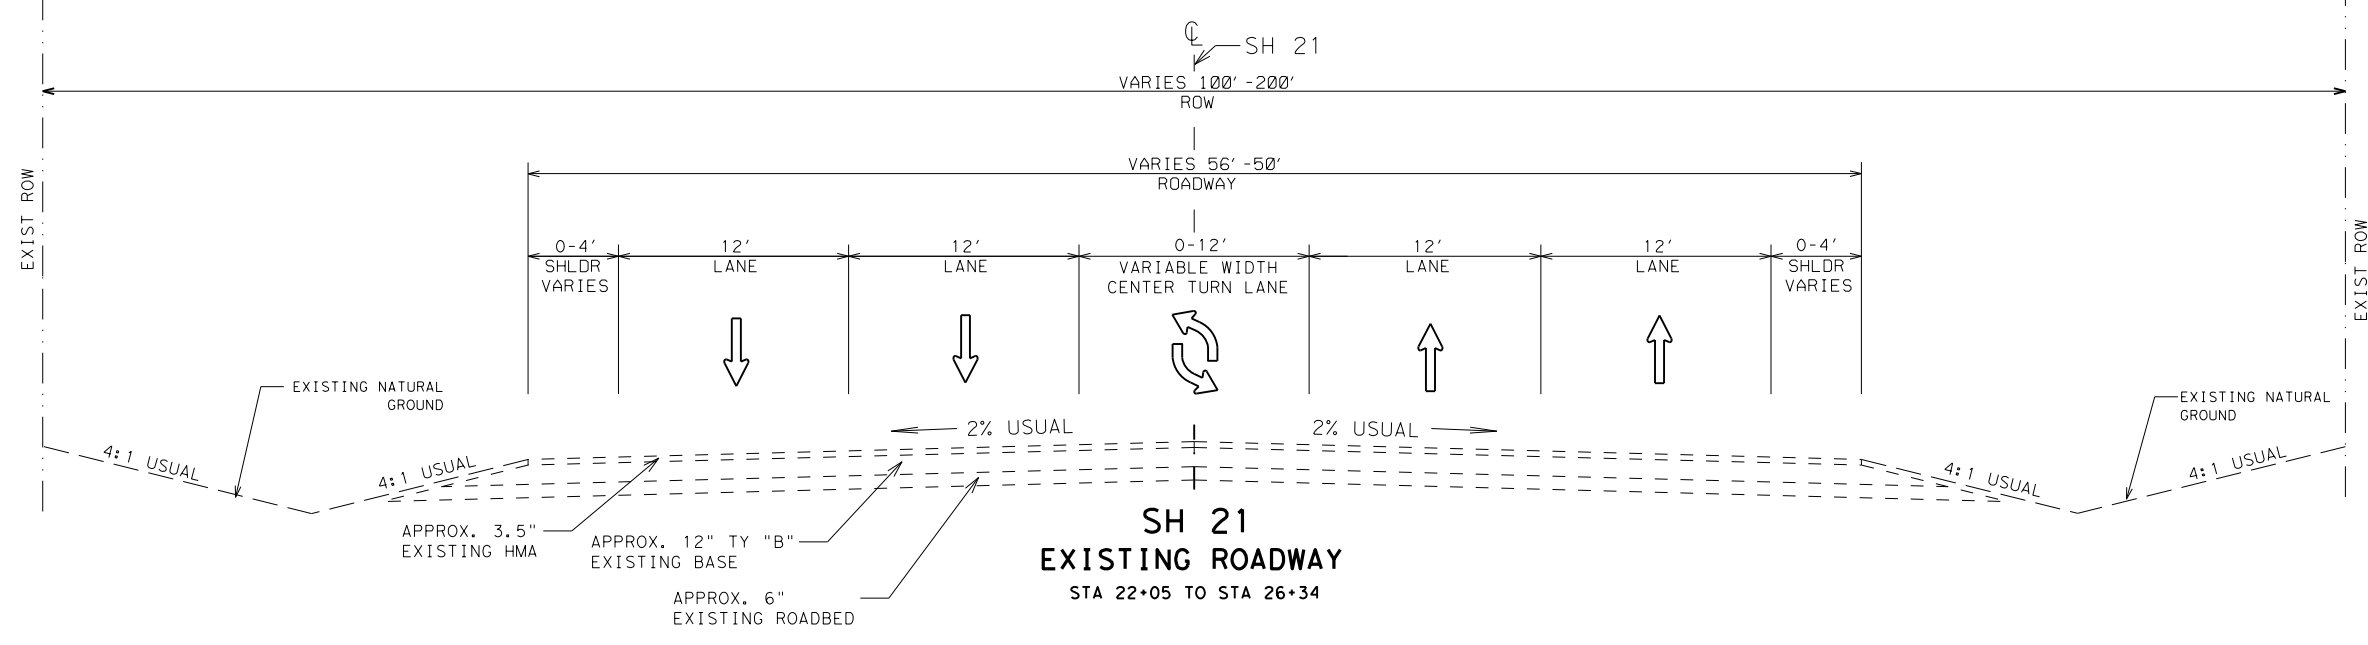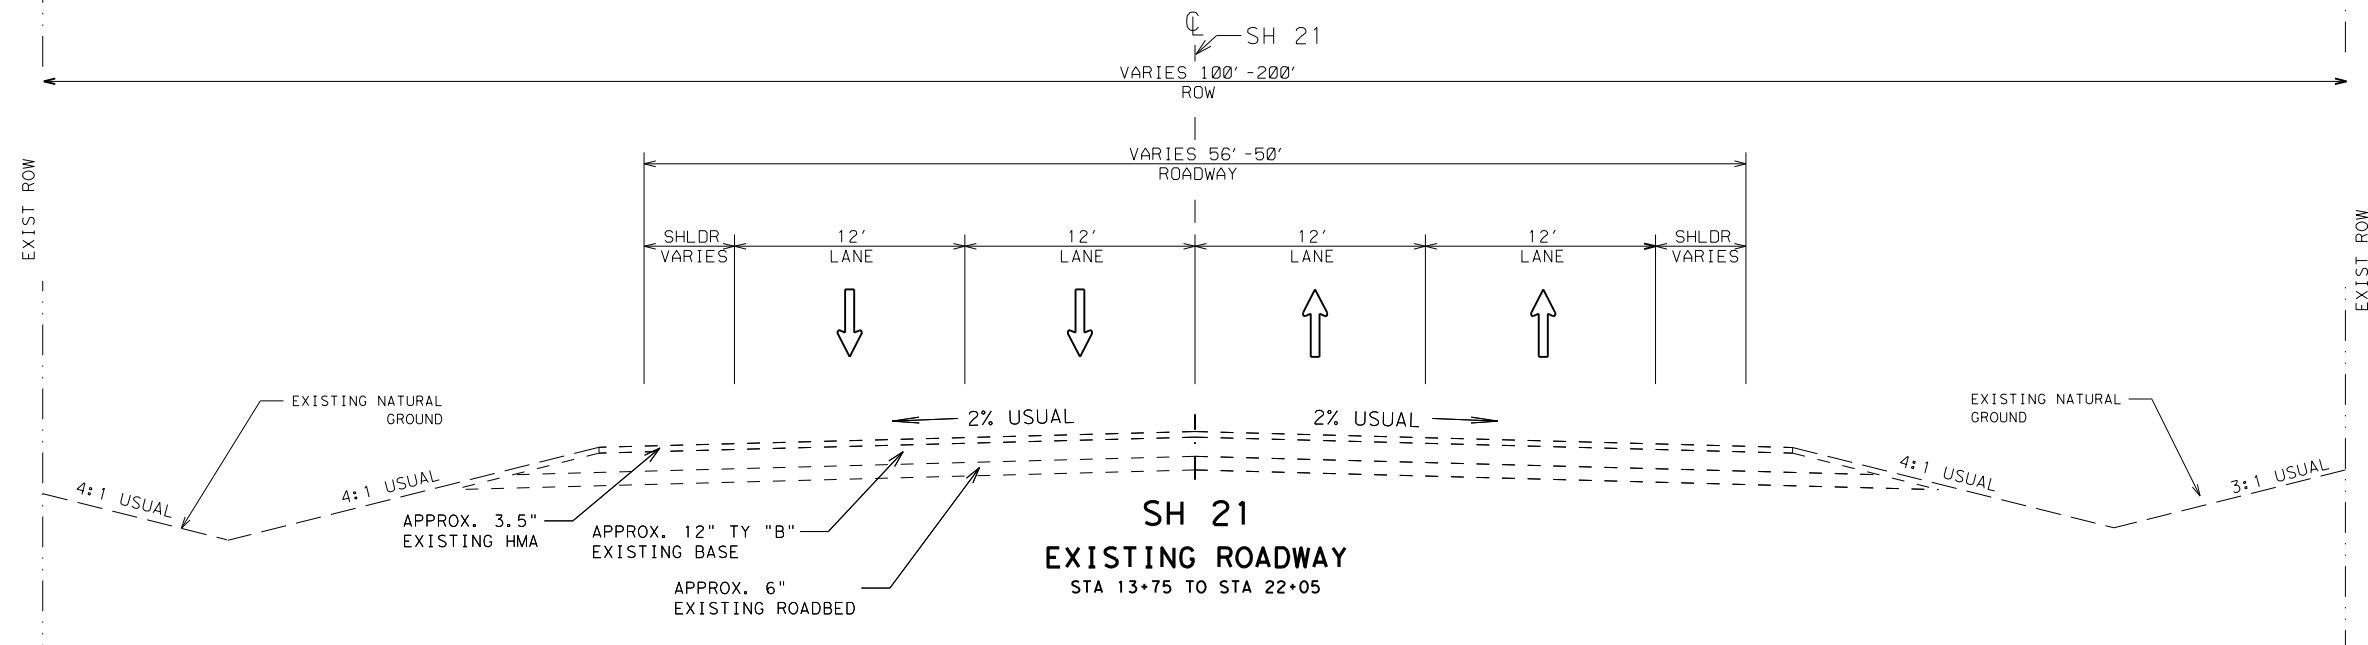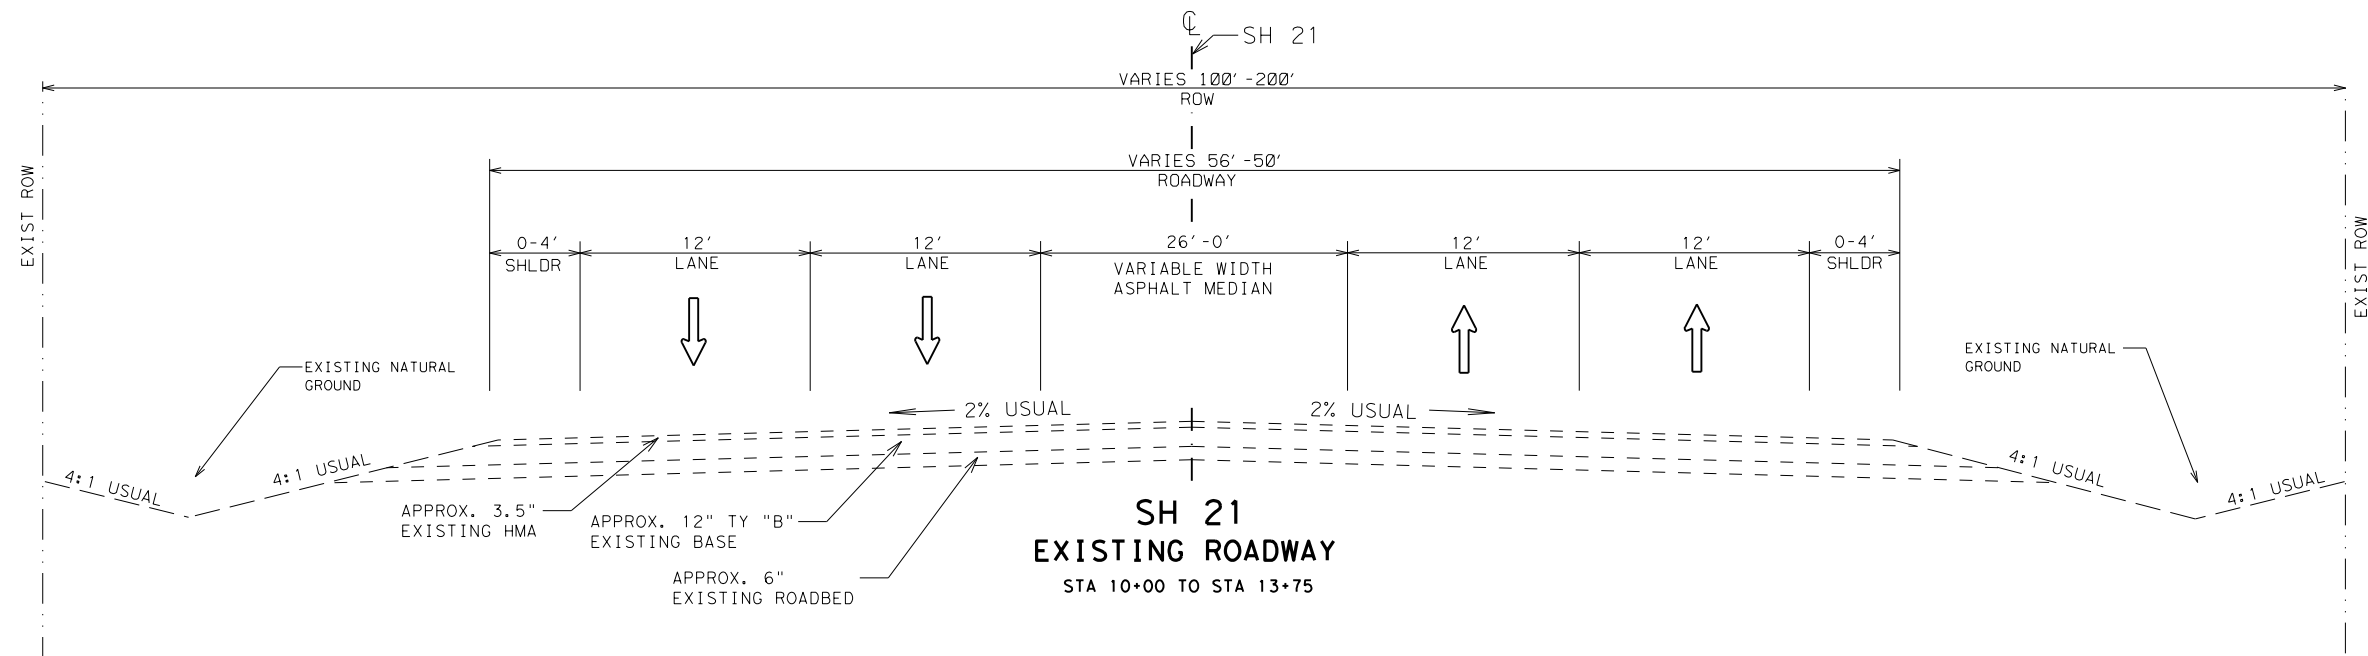

- NOTES:
- ① STA 10+00 BEGIN 0.18 MI W OF QUARTER HORSE LOOP W
 - ② ALL STATIONS FOR MAILBOX AREAS SHOWN BELOW ARE TO BE PAVED TO MATCH EXISTING ROADWAY ELEVATION. SEE QUANTITY SUMMARY SHEET AND PROFILE SHEETS FOR ADDITIONAL NOTES & ITEM QUANTITIES:
STATIONS: 13+70 WB, 13+90 EB, 15+90 EB, AND 19+40 WB
 - ③ ALL TAPER LENGTHS ARE PROVIDED AND ARE INCLUDED IN TOTAL QUANTITIES.
 - ④ STA 26+34 END AT QUARTER HORSE LOOP E



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

DATE: \$DATE\$
 FILE: \$FILE\$



N. T. S. SHEET 1 OF 7

**Austin District
 Bastrop Area Office**


Texas Department of Transportation

**SH 21
 EXISTING
 TYPICAL SECTION**

© 2022	CONT	SECT	JOB	HIGHWAY
DS: _____	0265	05	089, ETC	SH 71, ETC
DW: _____	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	11

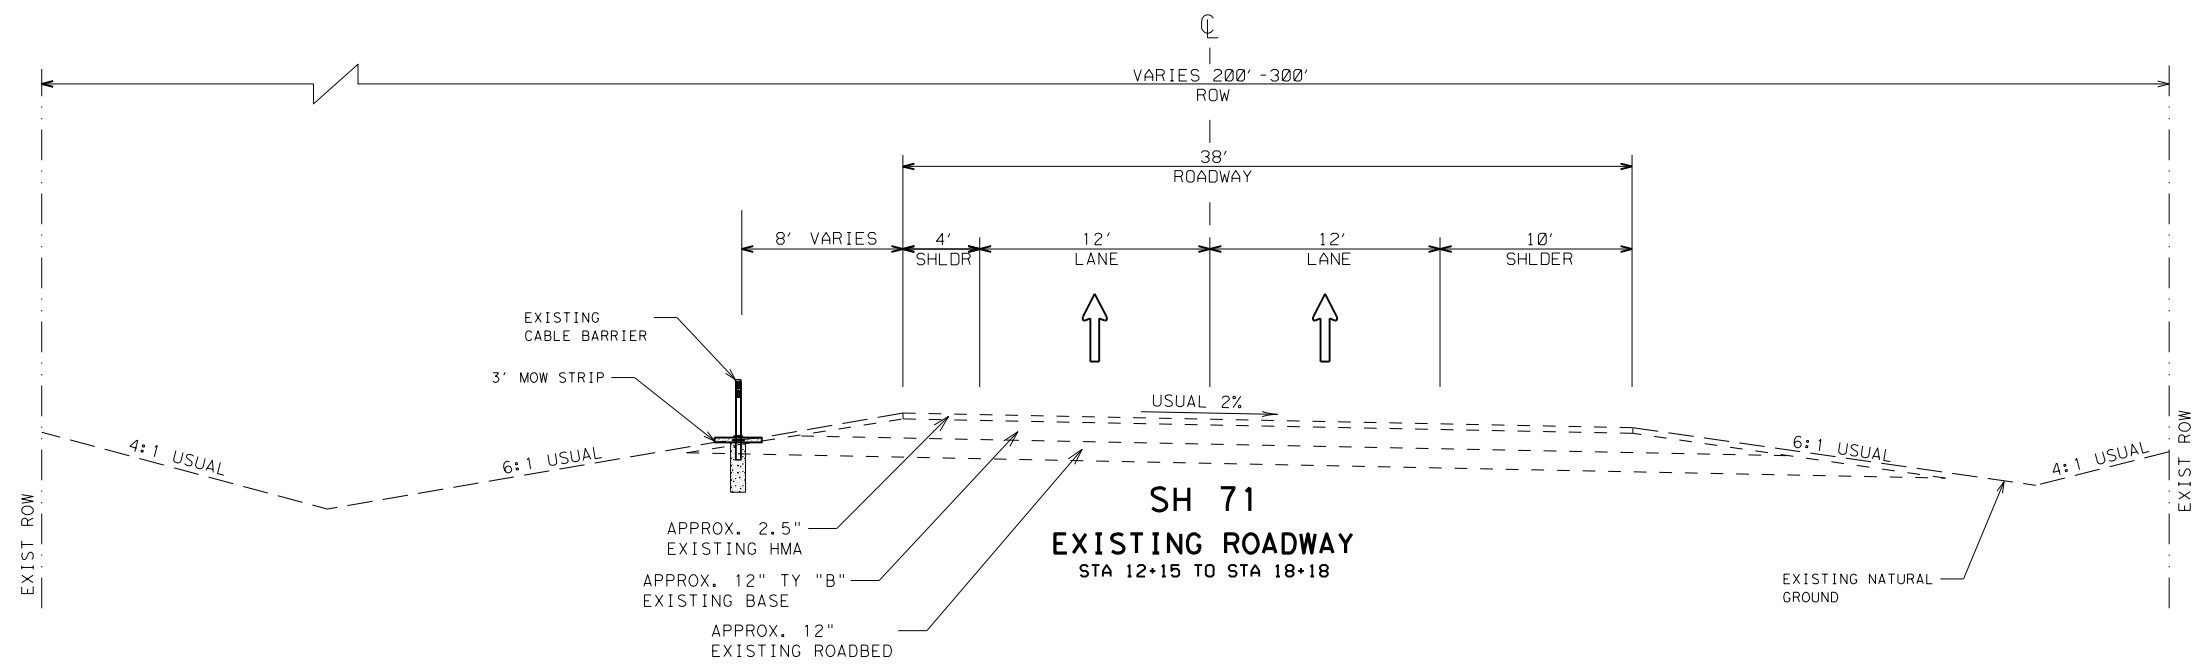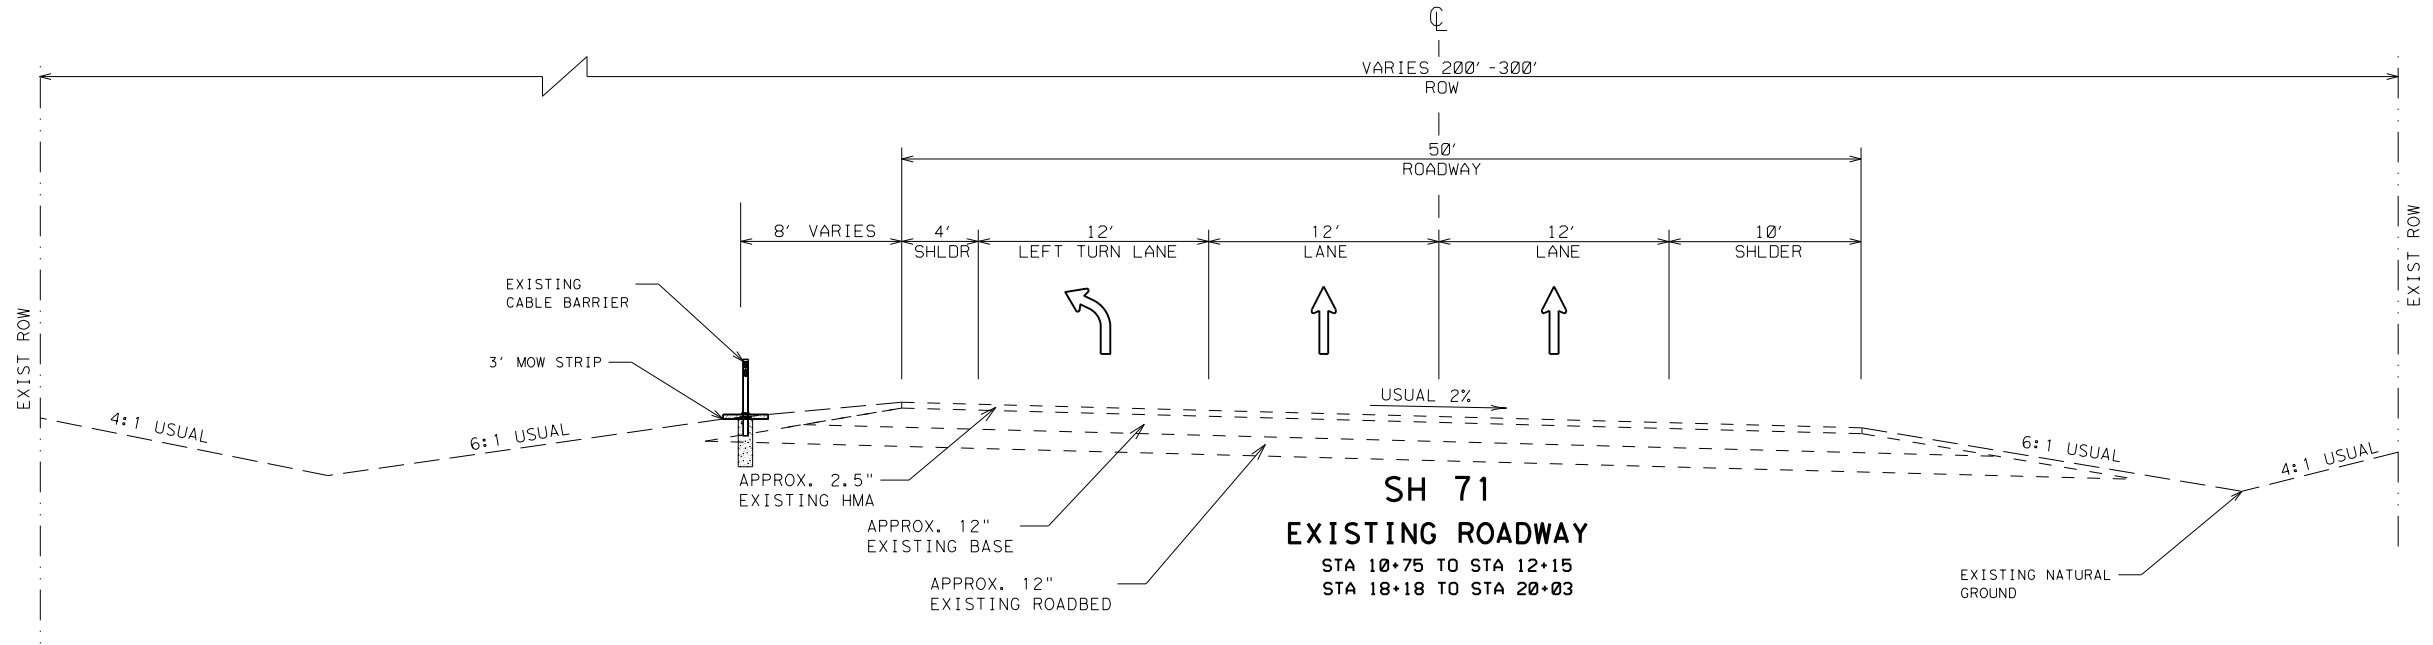

- NOTES: ① STA 10+00 BEGIN APPROX. 0.04 MI W OF WAY STATION TRAIL
- ② ALL TAPER LENGTHS ARE PROVIDED AND ARE INCLUDED IN TOTAL QUANTITIES.
- ③ ALL STATIONS SHOWN BELOW IN FEMA AREAS - NET INCREASES IN MATERIAL SHALL BE KEPT AT A MINIMUM TO PERVENT DISPLACEMENT OF DRAINAGE.
- STA 10+00 TO STA 15+72
- ④ STA 20+55 END AT COTTLETOWN RD (CR 154)




DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

**Austin District
 Bastrop Area Office**


**SH 71
 EXISTING
 TYPICAL SECTION**

© 2022	CONT	SECT	JOB	HIGHWAY
DS: CK:	0265	05	089, ETC	SH 71
DW: CK:	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	12

DATE: \$DATE\$
 TIME: \$TIME\$
 FILE: \$FILES\$

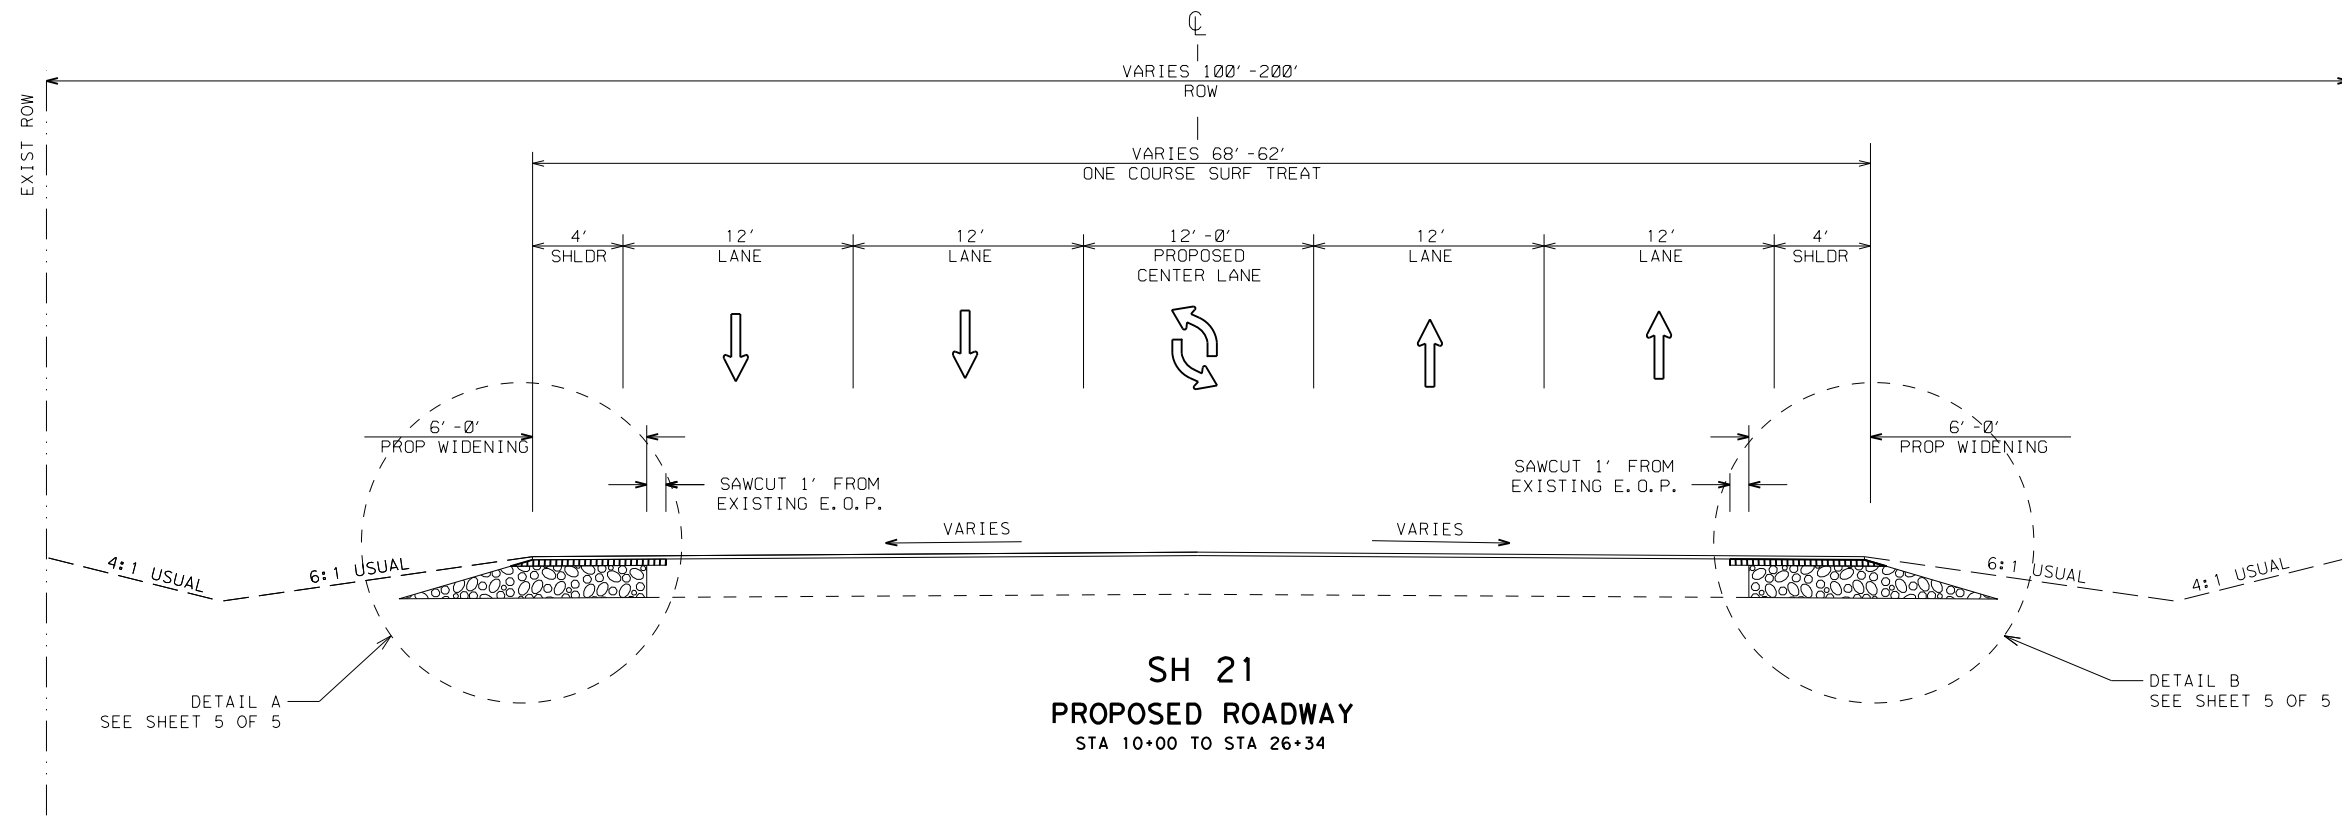

NOTE: DETAILS ARE ON SHEET 7 OF 7



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...

1/25/2023

- NOTES:
- ① STA 10+00 BEGIN 0.18 MI W OF QUARTER HORSE LOOP W
 - ② ALL STATIONS FOR MAILBOX AREAS SHOWN BELOW ARE TO BE PAVED TO MATCH EXISTING ROADWAY ELEVATION. SEE QUANTITY SUMMARY SHEET AND PROFILE SHEETS FOR ADDITIONAL NOTES & ITEM QUANTITIES:
 STATIONS: 13+70 WB, 13+90 EB, 15+90 EB, 19+40 WB
 - ③ ALL TAPER LENGTHS ARE PROVIDED AND ARE INCLUDED IN TOTAL QUANTITIES.
 - ④ STA 26+34 END AT QUARTER HORSE LOOP E

N. T. S. SHEET 2 OF 7



**Austin District
 Bastrop Area Office**




**SH 21
 PROPOSED
 TYPICAL SECTION**

© 2022	CONT	SECT	JOB	HIGHWAY
DS: CK:	0265	05	089, ETC	SH 71, ETC
DW: CK:	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	13

DATE: \$DATES \$TIME\$
 FILE: \$FILES

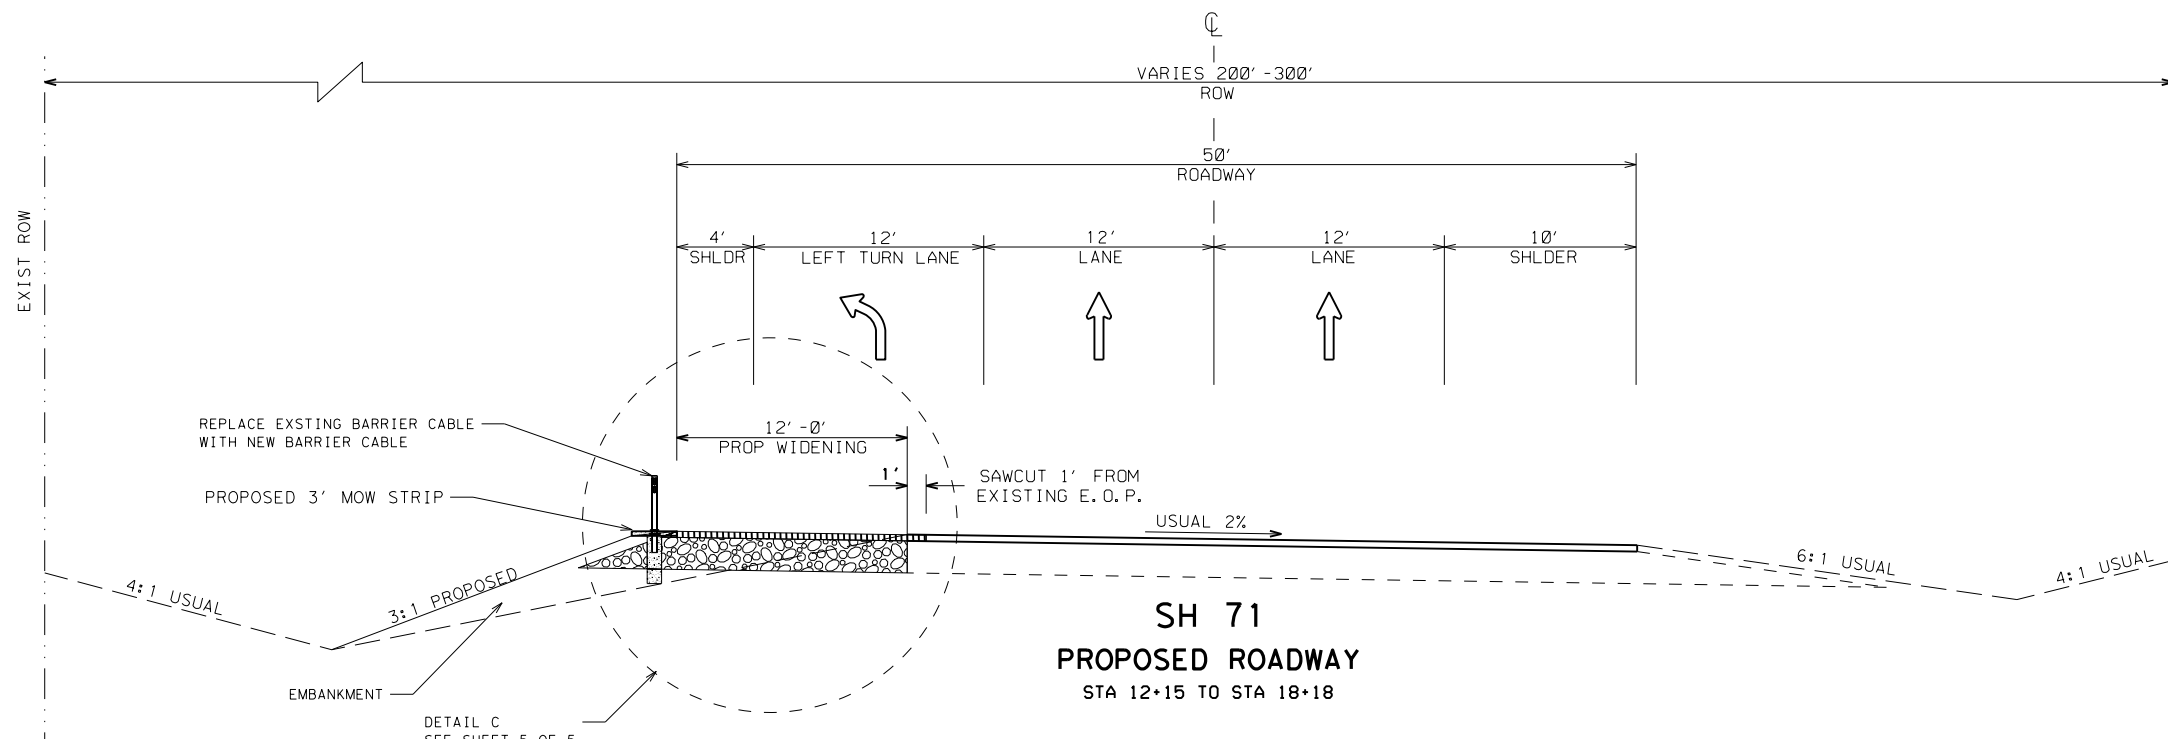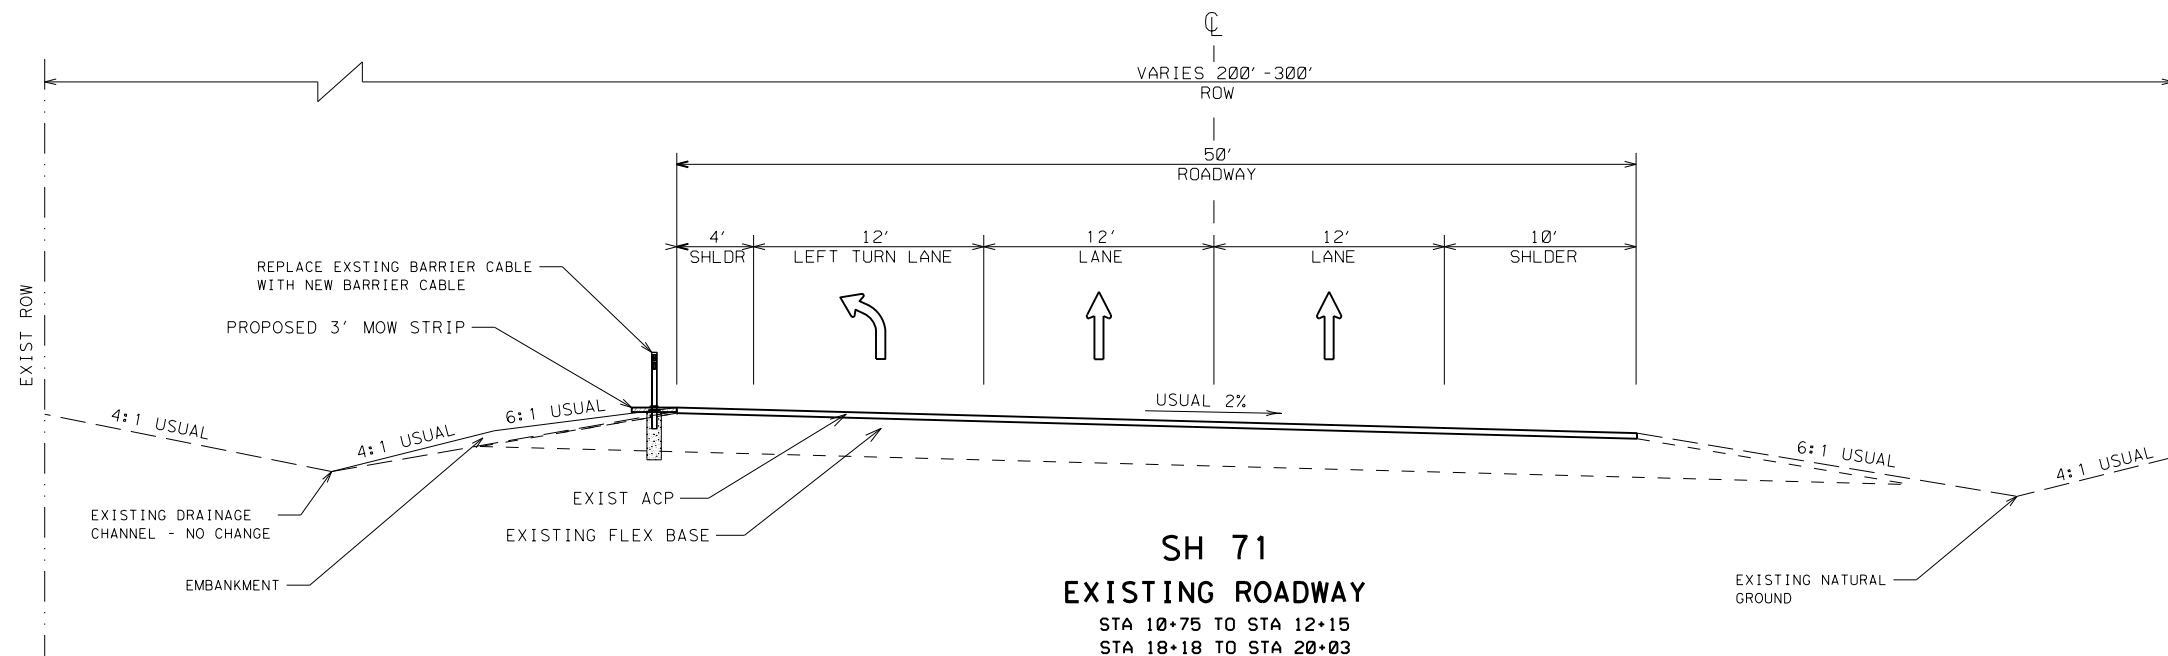

NOTE: DETAILS ARE ON SHEET 7 OF 7



DocuSigned by:
Diana K. Schulze P.E.
6775445255A3482...
1/25/2023

- NOTES: ① STA 10+00 BEGIN APPROX. 0.04 MI W OF WAY STATION TRAIL
- ② ALL TAPER LENGTHS ARE PROVIDED AND ARE INCLUDED IN TOTAL QUANTITIES.
- ③ ALL STATIONS SHOWN BELOW IN FEMA AREAS - NET INCREASES IN MATERIAL SHALL BE KEPT AT A MINIMUM TO PERVENT DISPLACEMENT OF DRAINAGE.
- STA 10+00 TO STA 15+72
- ④ STA 20+55 END AT COTTLETOWN RD (CR 154)

N. T. S. SHEET 5 OF 7


**Austin District
Bastrop Area Office**

**SH 71
PROPOSED
TYPICAL SECTION**

© 2022	CONT	SECT	JOB	HIGHWAY
DS: 0265	CK: 05		089, ETC	SH 71, ETC
DW:	CR:		DIST	COUNTY
			AUS	BASTROP
				SHEET NO.
				14

DATE: \$DATE\$ \$TIME\$
FILE: \$FILES\$


SH 21 WB

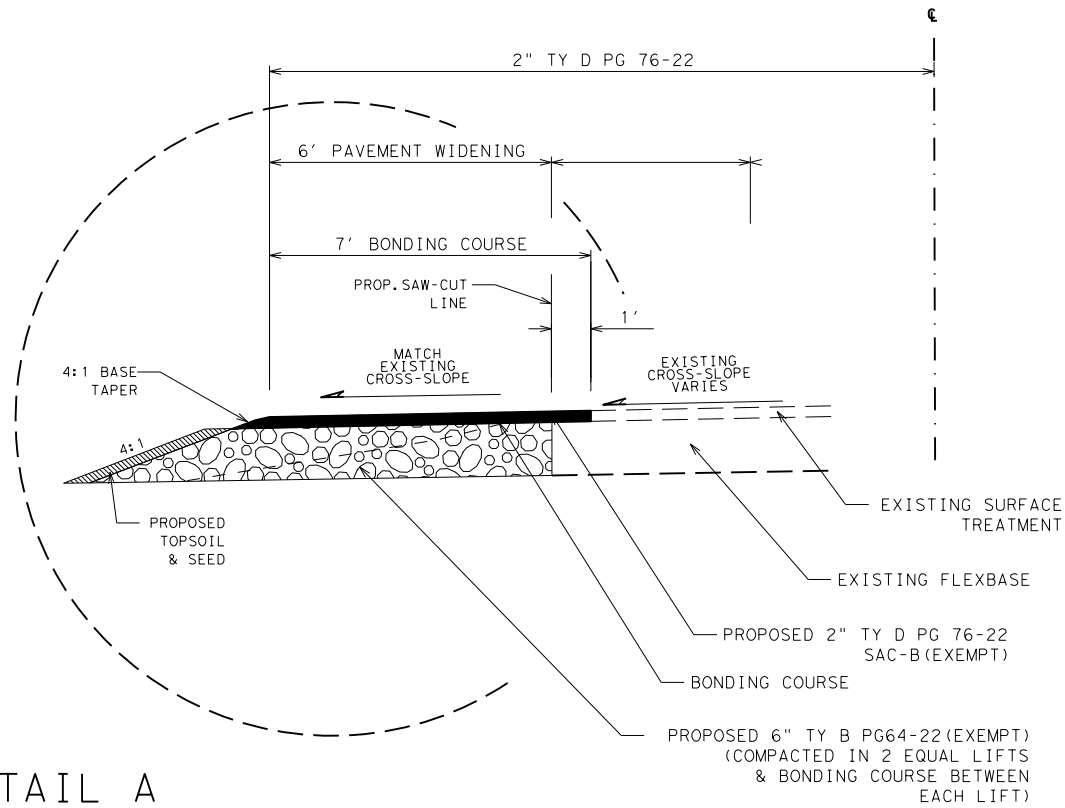

DETAIL A

N. T. S.


SH 21 EB

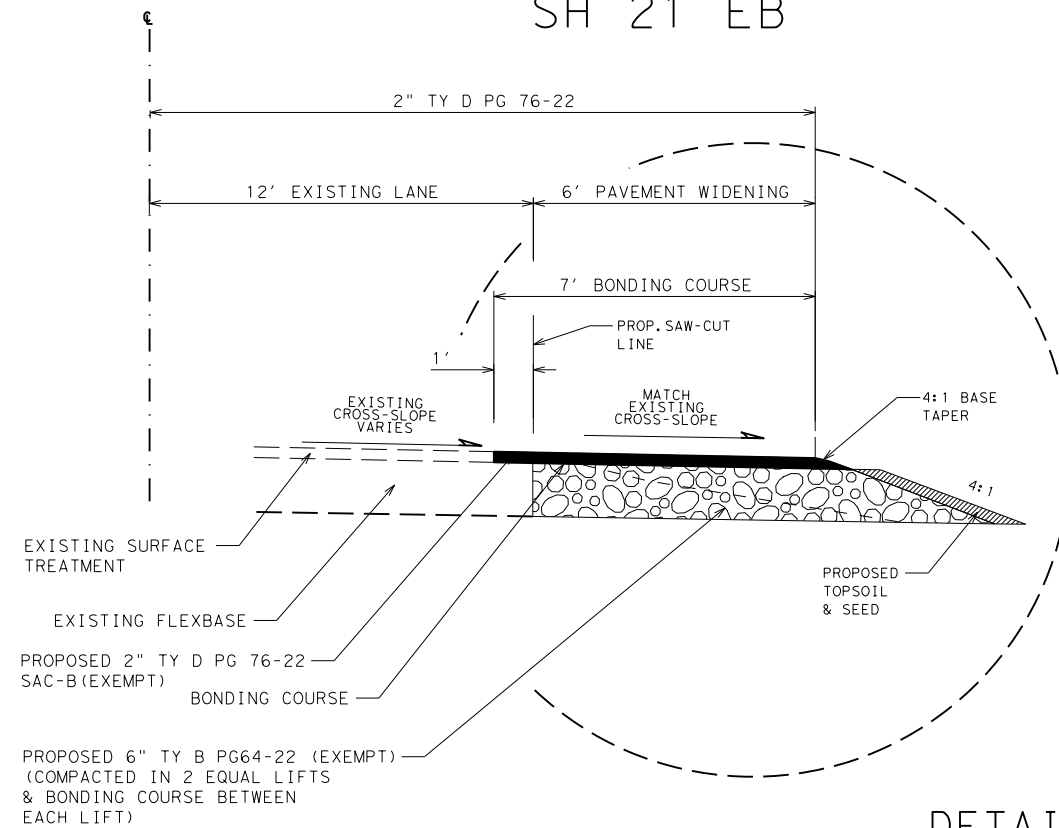

DETAIL B


N. T. S.

SH 71 EB

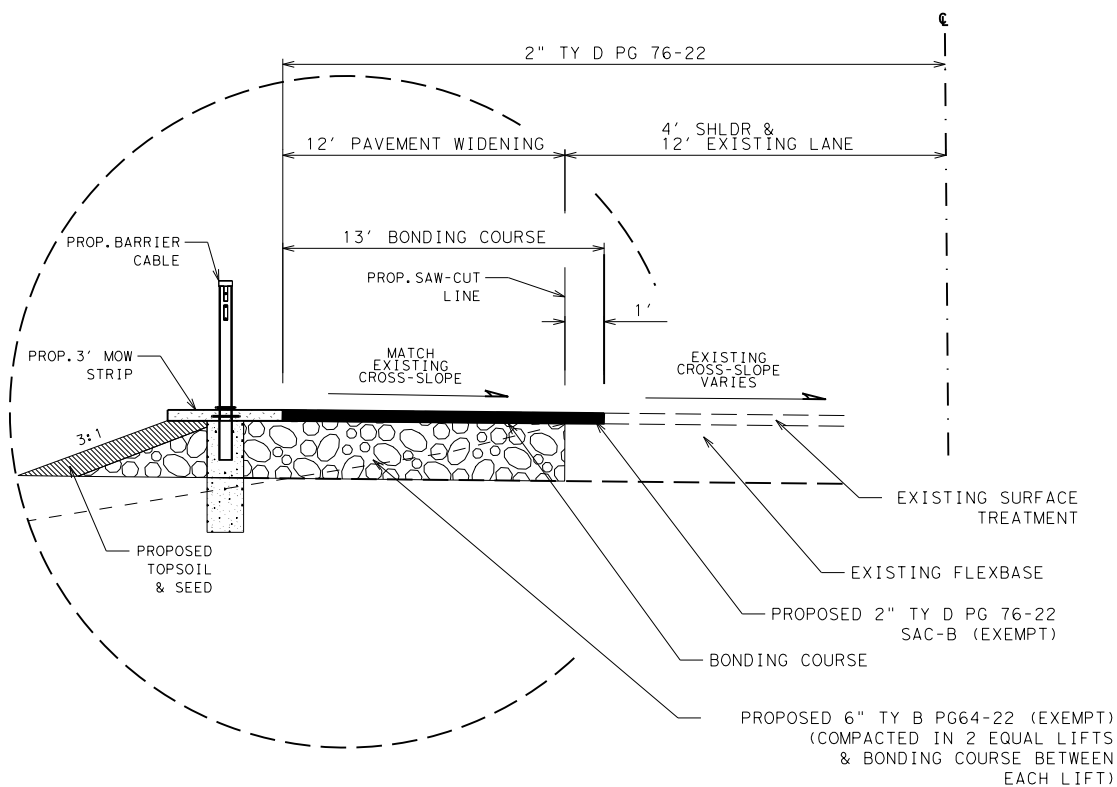

DETAIL C

N. T. S.



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...

1/25/2023

NOTES:

1. STATIONS AND DISTANCES ARE APPROXIMATE AND ARE FOR INFORMATIONAL PURPOSES ONLY.
2. ANY DAMAGES TO EXISTING CROSS CULVERTS OR IRRIGATION CROSSINGS CAUSED BY THE CONTRACTOR WILL BE REPAIRED BY THE CONTRACTOR AT THE CONTRACTOR'S EXPENSE.
3. WHERE POSSIBLE AND UNLESS OTHERWISE DIRECTED BY THE ENGINEER, PERMISSIBLE CONSTRUCTION JOINTS SHALL FALL ON STRIPING LANES.
4. SAW CUT LINES SHOWN FOR CONTRACTOR'S INFORMATION ONLY AND SHALL BE SUBSIDIARY TO PERTINENT BID ITEMS.
5. TOP SOIL AND SEEDING THROUGH OUT ENTIRE PROJECT ON BOTH SH 71 & SH 21

N. T. S.

SHEET 7 OF 7




**Austin District
 Bastrop Area Office**




TYPICAL SECTION DETAILS

© 2022	CONT	SECT	JOB	HIGHWAY
	0265	05	089, ETC	SH 71, ETC
	DIST		COUNTY	SHEET NO.
	AUS		CALDWELL	15

DATE: \$DATES \$TIME\$
 FILE: \$FILES

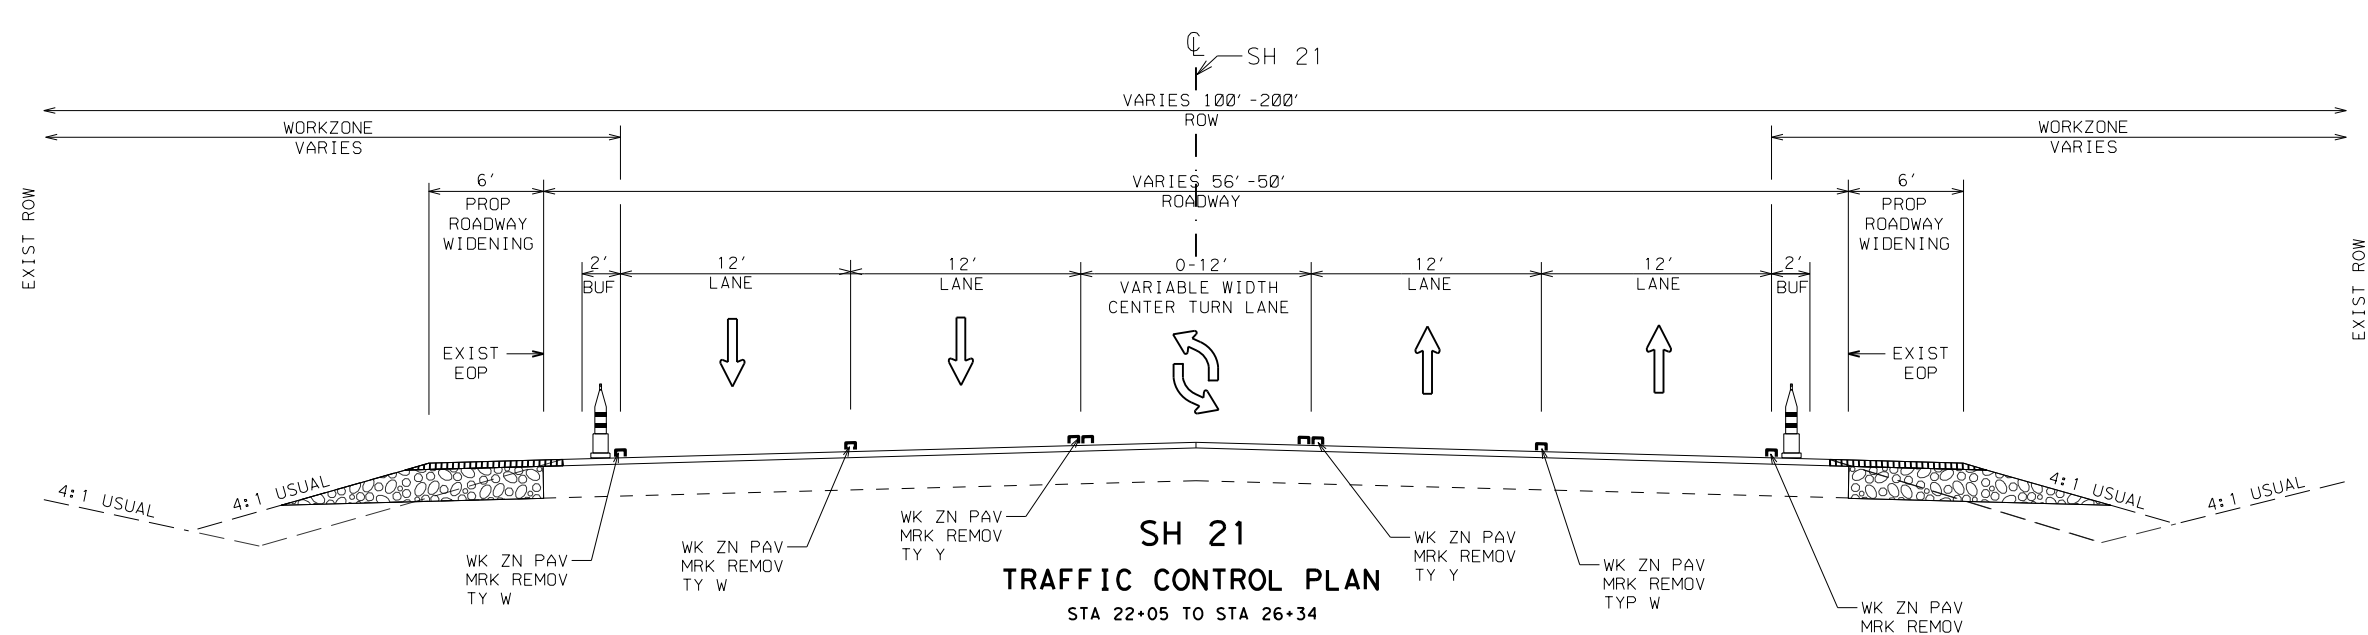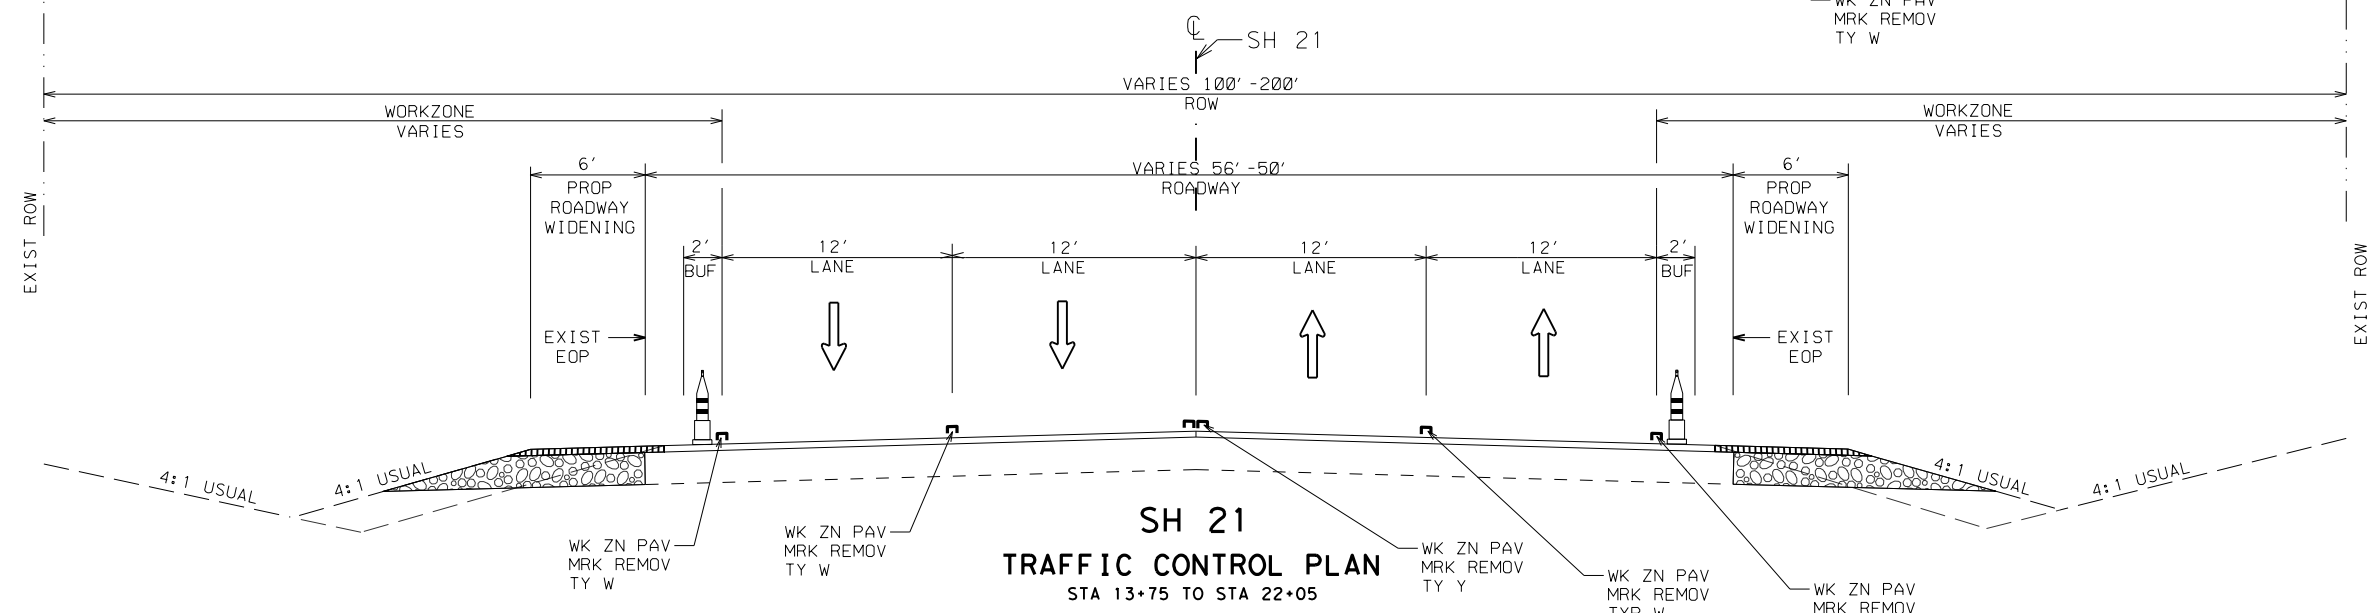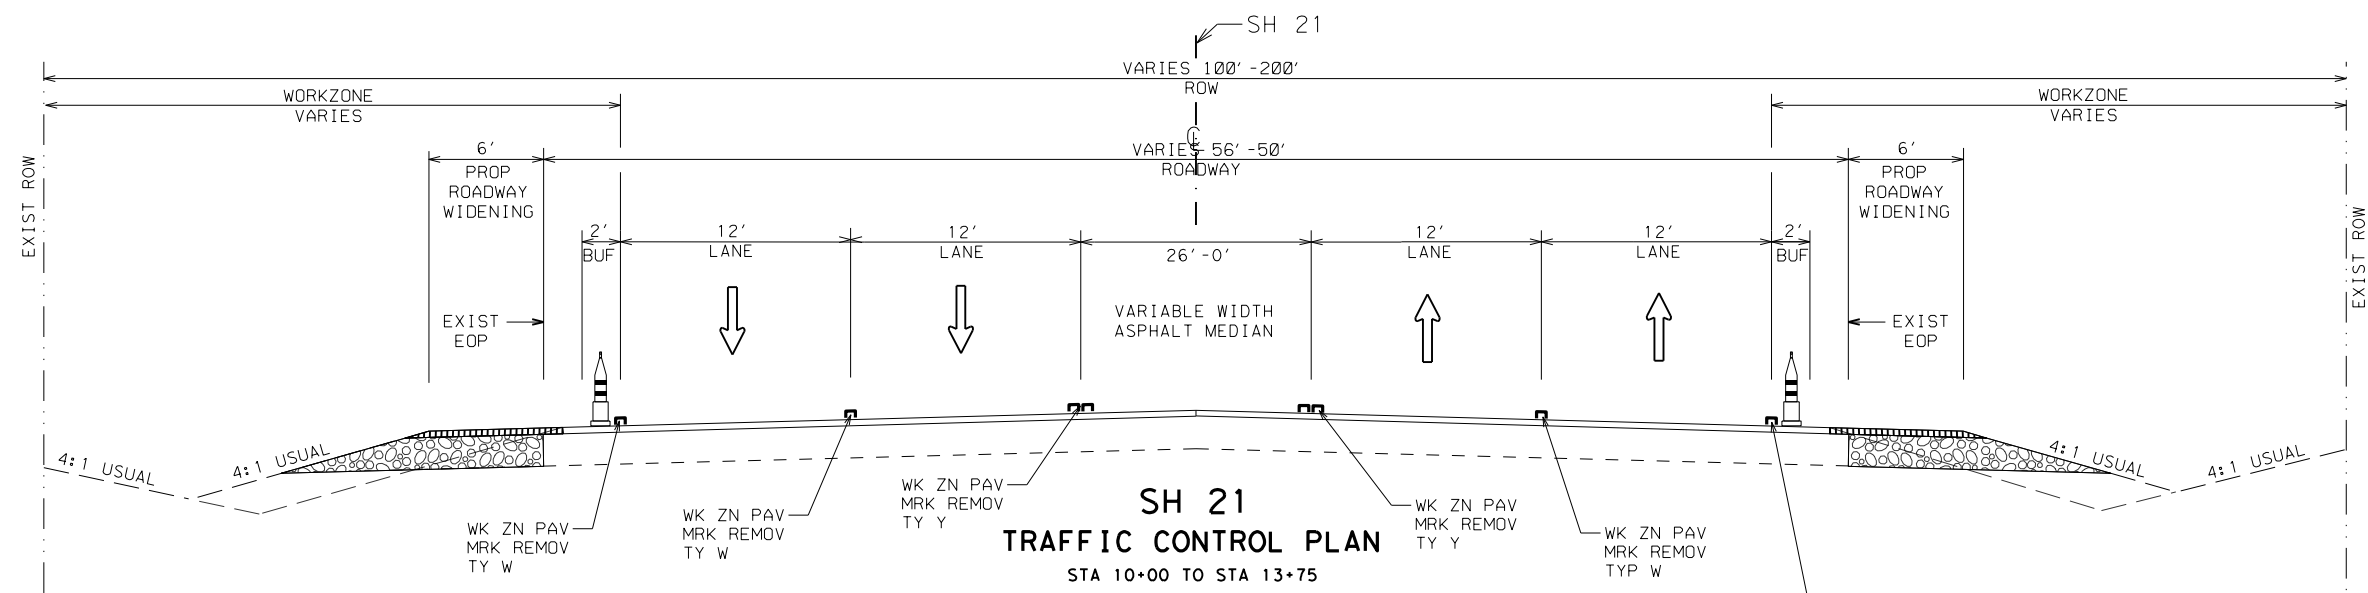

- NOTES:
1. NO PLAN VIEW TCP PROVIDED. USE TCP STANDARD FOR TRAFFIC CONTROL SETUP.
 2. USE 3:1 SAFETY SLOPES FOR ALL DROPOFFS GREATER THAN 2-INCHES AT THE END OF WORKSHIFT, CONSIDER THIS SUBSIDIARY TO ITEM 502.
 3. SEQUENCE OF CONSTRUCTION CAN BE CHANGED WITH PRIOR APPROVAL FROM ENGINEER.
 4. MAINTAIN A 1 FT CLEARZONE BETWEEN EDGE OF TRAVEL LANE AND TRAFFIC BARREL.
 5. REFER TO BC STANDARDS FOR CHANNELIZING DEVICE SPACING REQUIREMENTS.
 6. REFER TO TYPICAL SECTION DETAILS (SHEET 7 OF 7) FOR DETAILS ON CONSTRUCTION MATERIAL.



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

DATE: \$DATE\$
 FILE: \$FILES\$


N. T. S. SHEET 3 OF 7

**Austin District
Bastrop Area Office**


Texas Department of Transportation

**SH 21
TRAFFIC
CONTROL PLAN
TYPICAL SECTION**

© 2022	CONT	SECT	JOB	HIGHWAY
DS: CK:	0265	05	089, ETC	SH 71, ETC
DW: CR:	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	15A

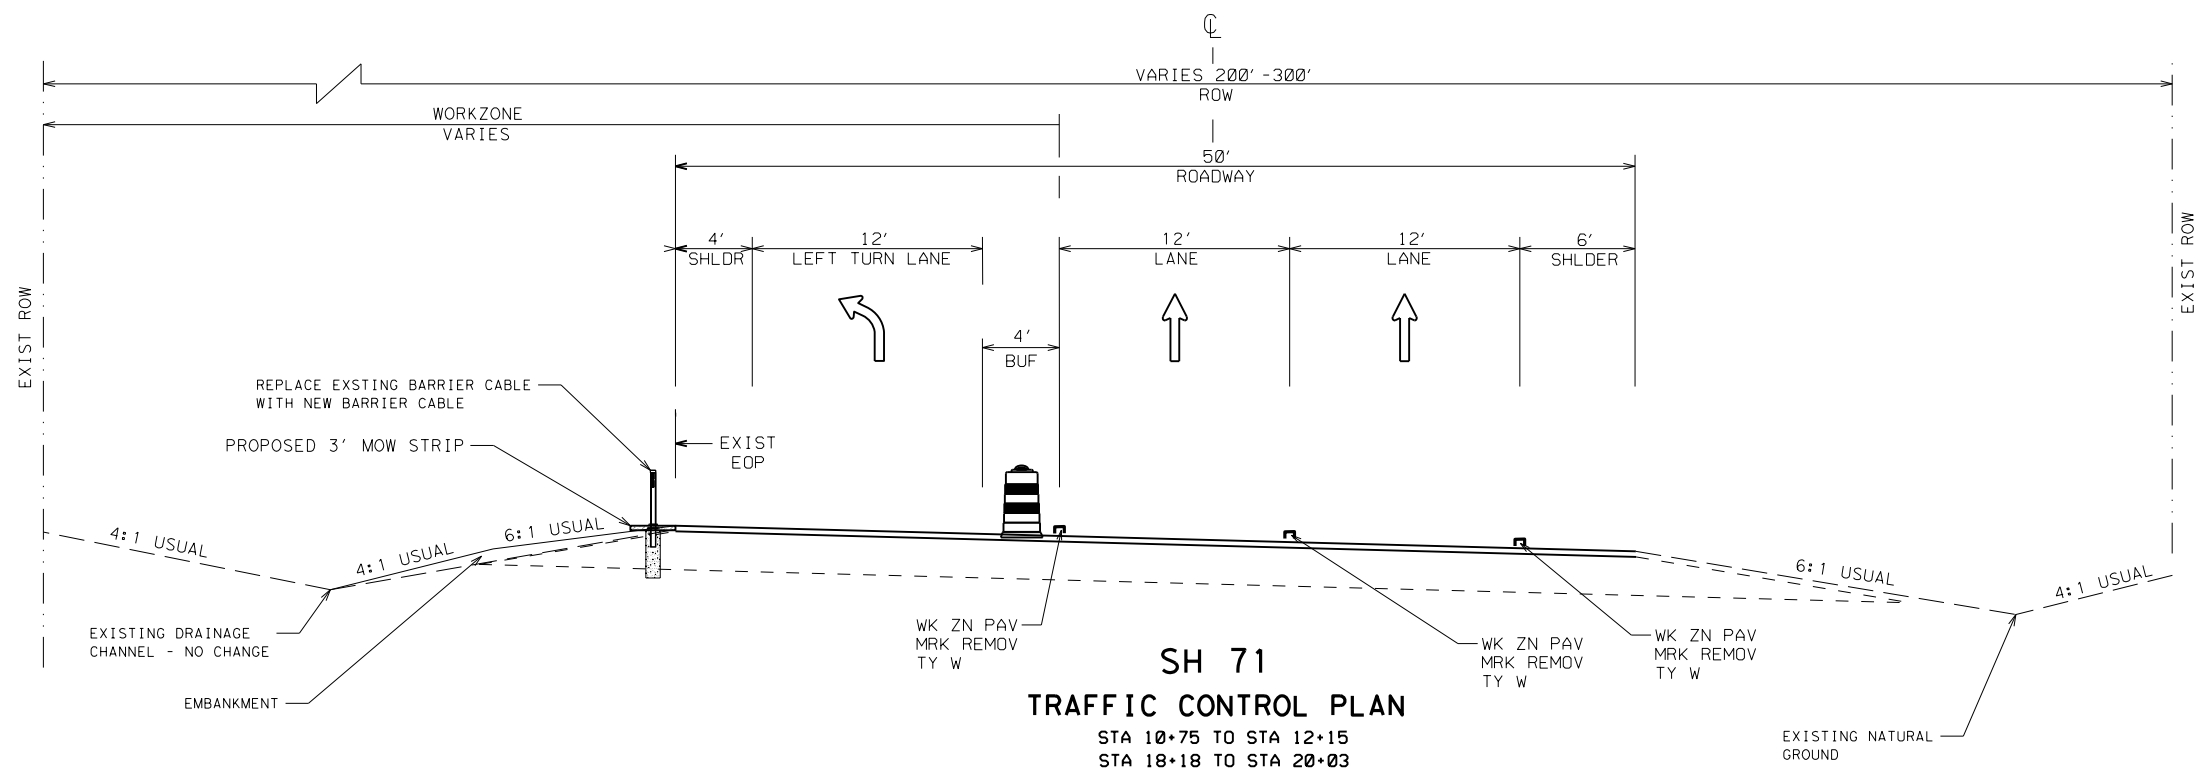


**SH 71
TRAFFIC CONTROL PLAN**
STA 10+75 TO STA 12+15
STA 18+18 TO STA 20+03

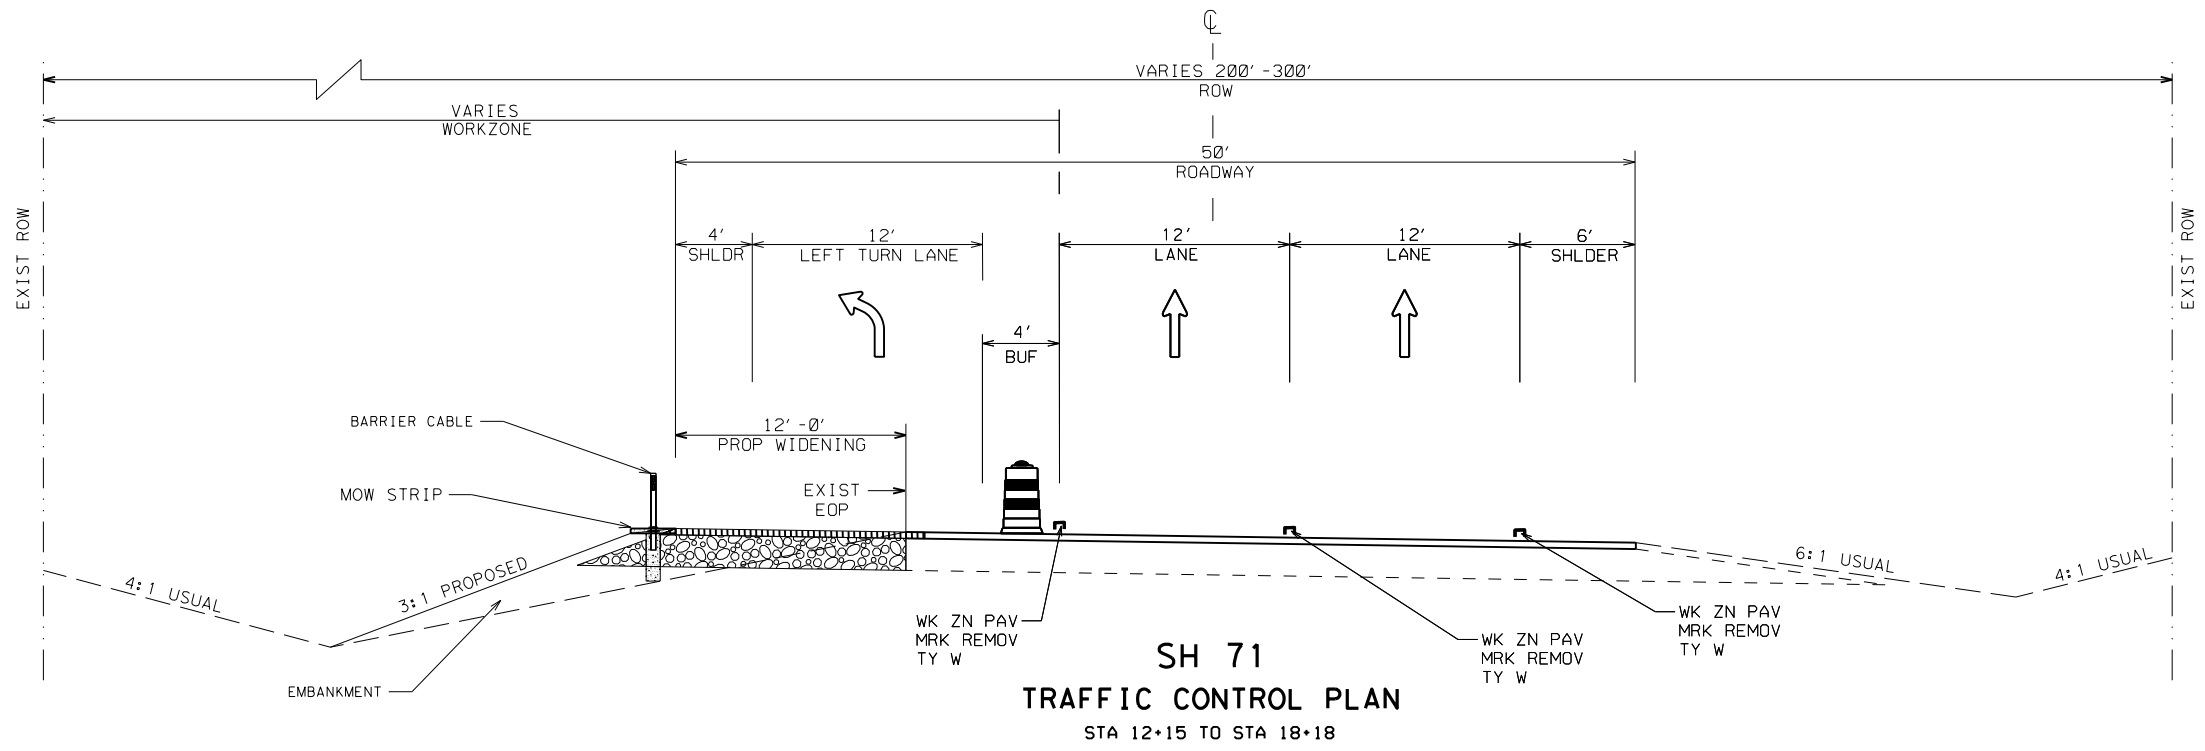

**SH 71
TRAFFIC CONTROL PLAN**
STA 12+15 TO STA 18+18

- NOTES:
1. NO PLAN VIEW TCP PROVIDED. USE TCP STANDARD FOR TRAFFIC CONTROL SETUP.
 2. USE 3:1 SAFETY SLOPES FOR ALL DROPOFFS GREATER THAN 2-INCHES AT THE END OF WORKSHIFT, CONSIDER THIS SUBSIDIARY TO ITEM 502.
 3. SEQUENCE OF CONSTRUCTION CAN BE CHANGED WITH PRIOR APPROVAL FROM ENGINEER.
 4. MAINTAIN A 1 FT CLEARZONE BETWEEN EDGE OF TRAVEL LANE AND TRAFFIC BARREL.
 5. REFER TO BC STANDARDS FOR CHANNELIZING DEVICE SPACING REQUIREMENTS.
 6. REFER TO TYPICAL SECTION DETAILS (SHEET 7 OF 7) FOR DETAILS ON CONSTRUCTION MATERIAL.



DocuSigned by:
Diana K. Schulze P.E.
6775445255A3482...
1/25/2023

N. T. S. SHEET 3 OF 7

**Austin District
Bastrop Area Office**

Texas Department of Transportation

**SH 71
TRAFFIC
CONTROL PLAN
TYPICAL SECTION**

© 2022	CONT	SECT	JOB	HIGHWAY
DS: CK:	0265	05	089, ETC	SH 71, ETC
DW: CR:	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	15B

DATE: \$DATE\$
FILE: \$FILE\$

General Project Sequence

SH 21

- See location specific information pertaining to work restrictions in Item 502 of the General Notes.
- Install perimeter barricades.
- Install applicable TCP daily using TMA's and PCMB's as directed.
- Install toad exclusion fence as show in the plans or as directed by Engineer.
- Install temporary erosion control.
- EB Lane Saw Cut, excavate, and prepare subgrade as shown in on typical sections show on SH 21.
- EB Lane Install widened pavement structure along one side as construction progresses along SH 21.
- Prepare embankment.
- Construct Pavement transitions.
- WB Lane Saw Cut, excavate, and prepare subgrade as shown in on typical sections show on SH 21.
- WB Lane Install widened pavement structure along one side as construction progresses along SH 21.
- Prepare embankment.
- Construct Pavement transitions.
- Utilize signing and pavement marking layouts, install proposed signs.
- Utilize erosion control, install topsoils and seeding as directed.
- Place final surface treatment over the entire project.
- Remove perimeter barricades.


SH 71


- See location specific information pertaining to work restrictions in Item 502 of the General Notes.
- Install perimeter barricades.
- Install applicable TCP daily using TMA's and PCMB's as directed.
- Install toad exclusion fence as show in the plans or as directed by Engineer.
- Install temporary erosion control.
- Saw Cut, excavate, and prepare subgrade as shown in on typical sections show on SH 71.
- Install widened pavement structure along one side as construction progresses along SH 71
- Construct Pavement transitions.
- Prepare embankment and construct riprap and Install guardrail.
- Utilize signing and pavement marking layouts, install proposed signs.
- Utilize erosion control, install topsoils and seeding as directed.
- Remove perimeter barricades.

DATE: \$DATES \$TIME\$
FILE: \$FILES


DocuSigned by:
Diana K. Schulze P.E.
6775445255A3482...

1/4/2023




Austin District Bastrop Area Office				
 Texas Department of Transportation				
PROJECT SEQUENCE OF WORK				
© 2022	CONT	SECT	JOB	HIGHWAY
	0265	05	089, ETC	SH 71, ETC
	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	16

DW: _____
 CK: _____
 CC: _____

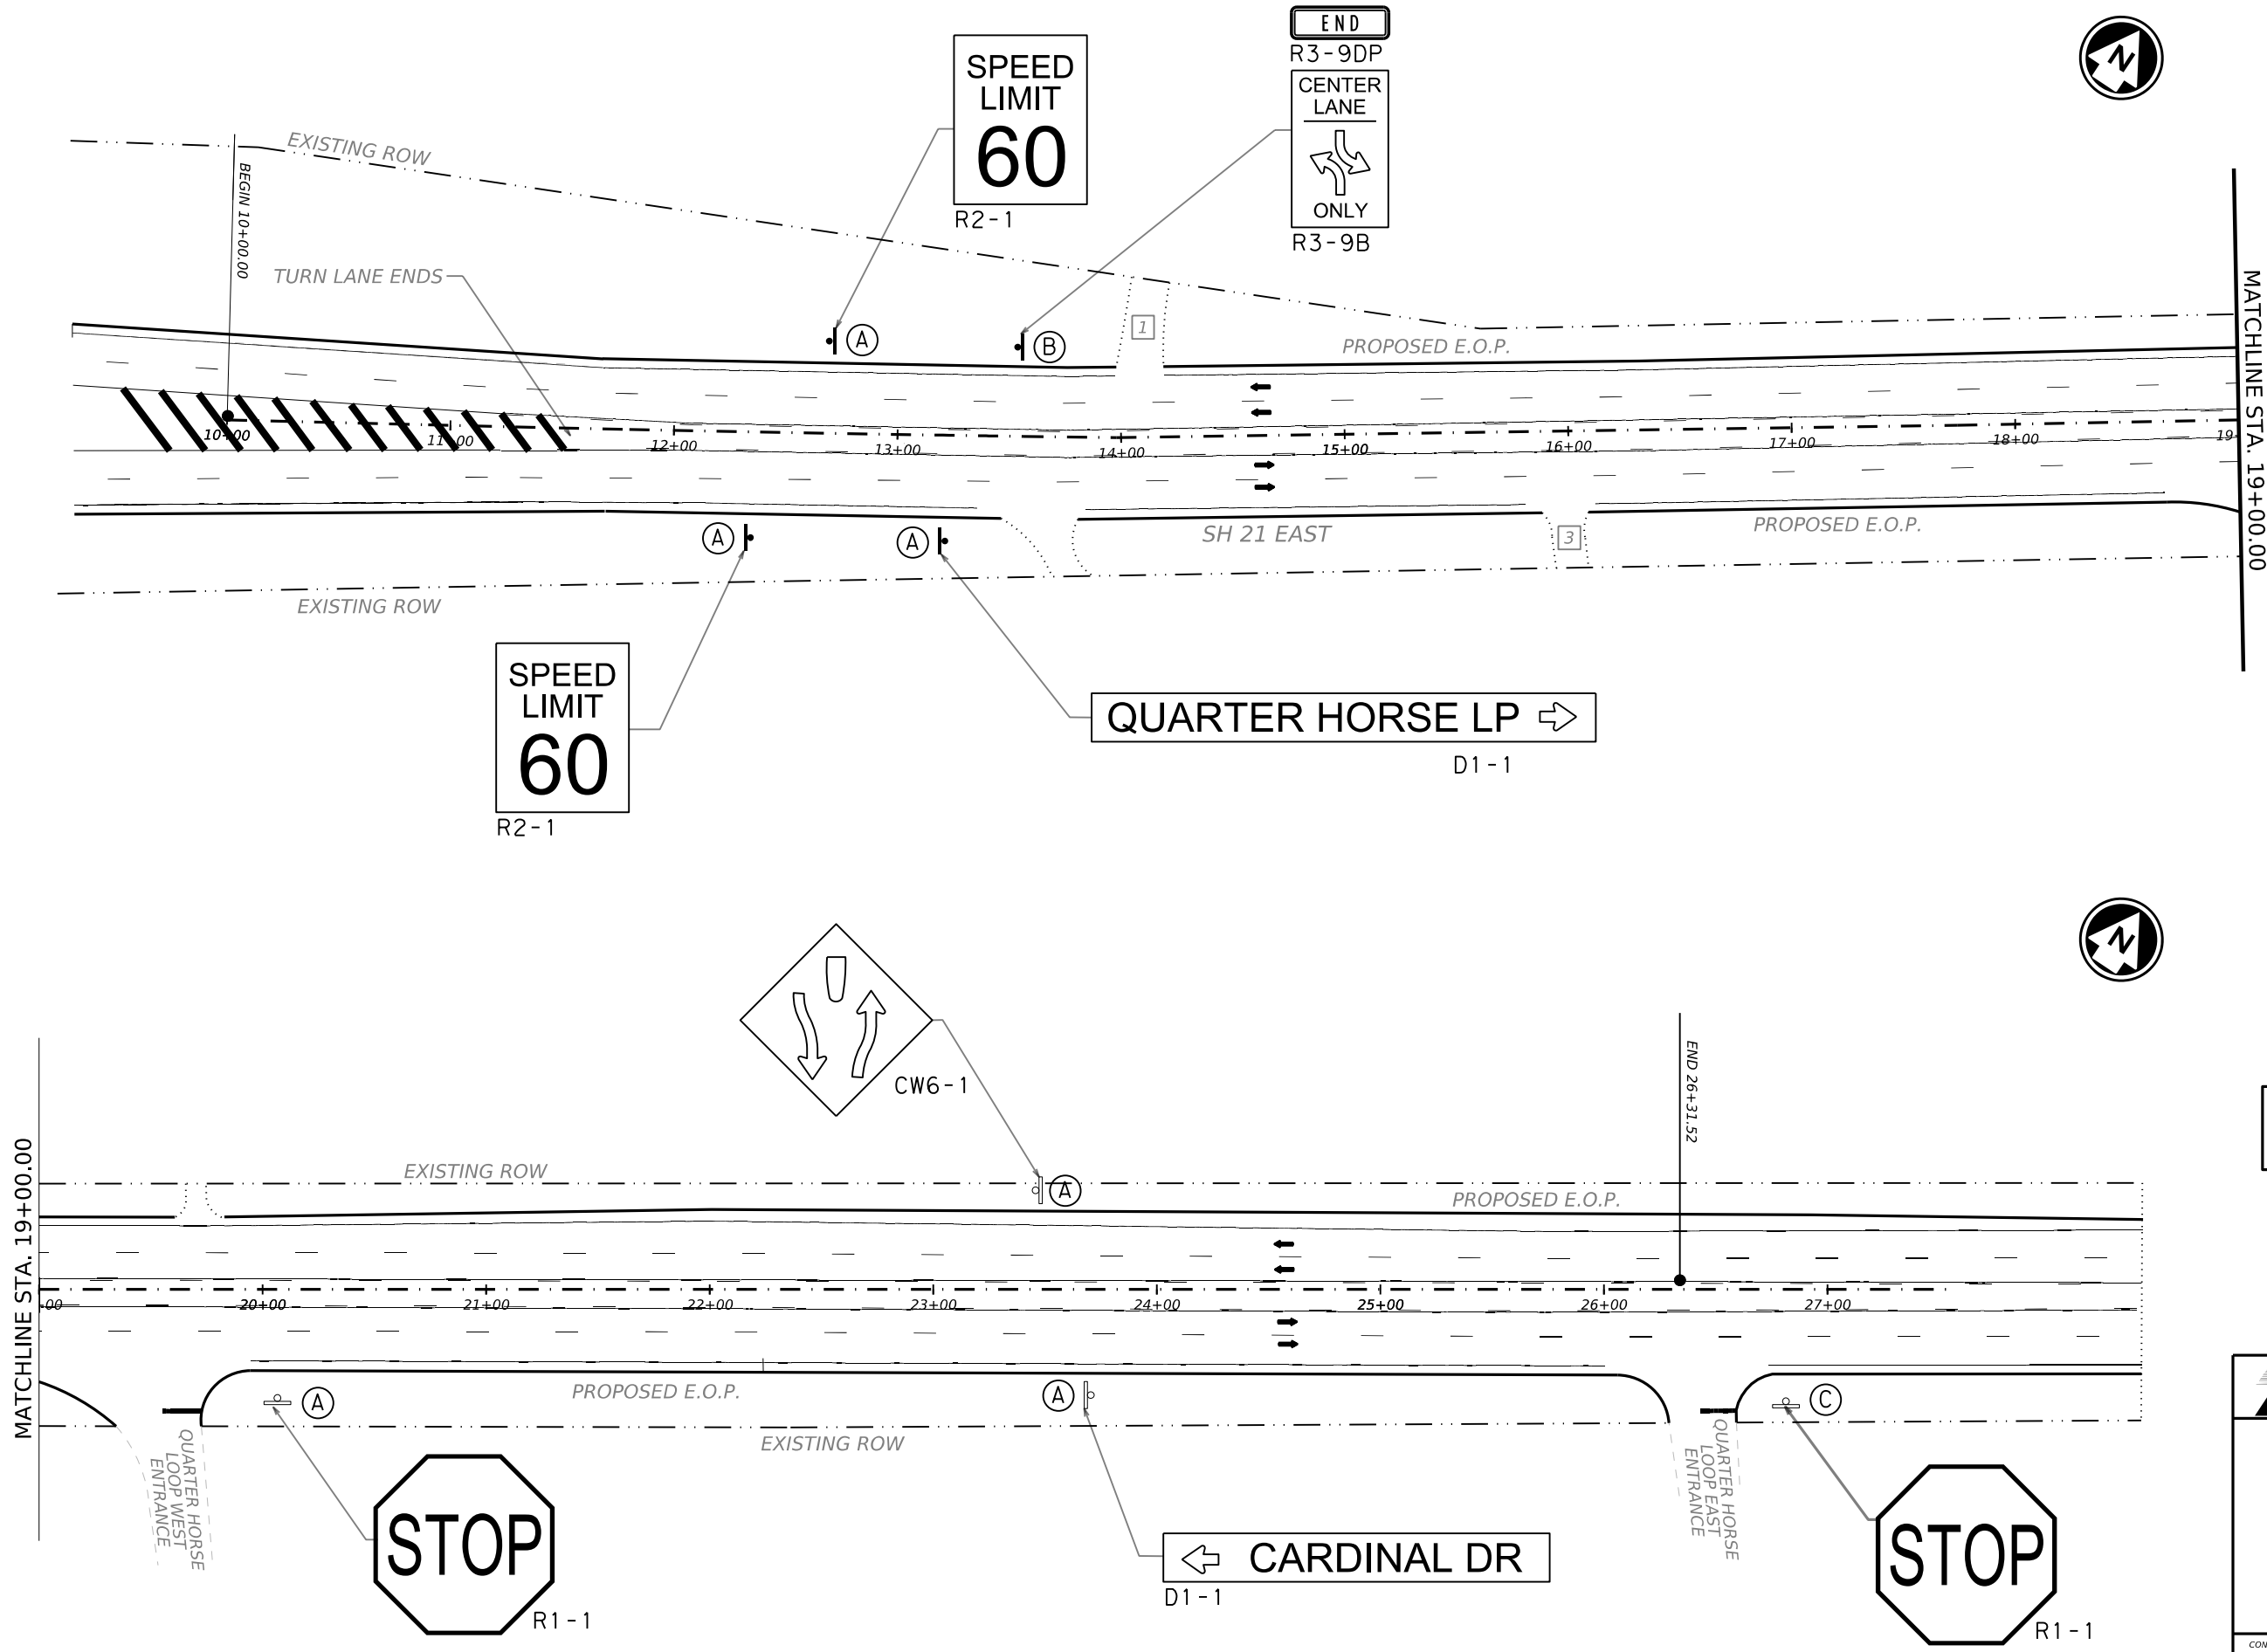

LEGEND

←	TRAFFIC FLOW
[X]	DRIVEWAY NUMBER
†	SIGN POST



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

- NOTES FOR SIGNS:**
- (A) REMOVE AND RELOCATE EXISTING SIGN
 - (B) ADD NEW SIGN SEE SOSS
 - (C) NO CHANGES NEEDED AT THIS LOCATION

This is a general layout for signs and pavement markings. see standards for placement details.

Texas Department of Transportation

SH 21

SIGNING, PAVEMENT MARKING AND DELINEATION LAYOUT

SHEET 1 OF 4


CONT	SECT	JOB	HIGHWAY
0471	01	050	SH 21
DIST	COUNTY	SHEET NO.	
AUS	BASTROP	17	

DATE: \$DATE\$ \$TIMES
 FILE: \$FILES\$

DW: _____
 CK: _____
 DN: _____

LEGEND

	TRAFFIC FLOW
	DRIVEWAY NUMBER
PAVEMENT MARKINGS	
	4" WHITE PROFILE
	4" WHITE BROKEN
	8" WHITE SOLID
	24" WHITE SOLID
	4" YELLOW PROFILE
	4" YELLOW BROKEN
	12" YELLOW SOLID

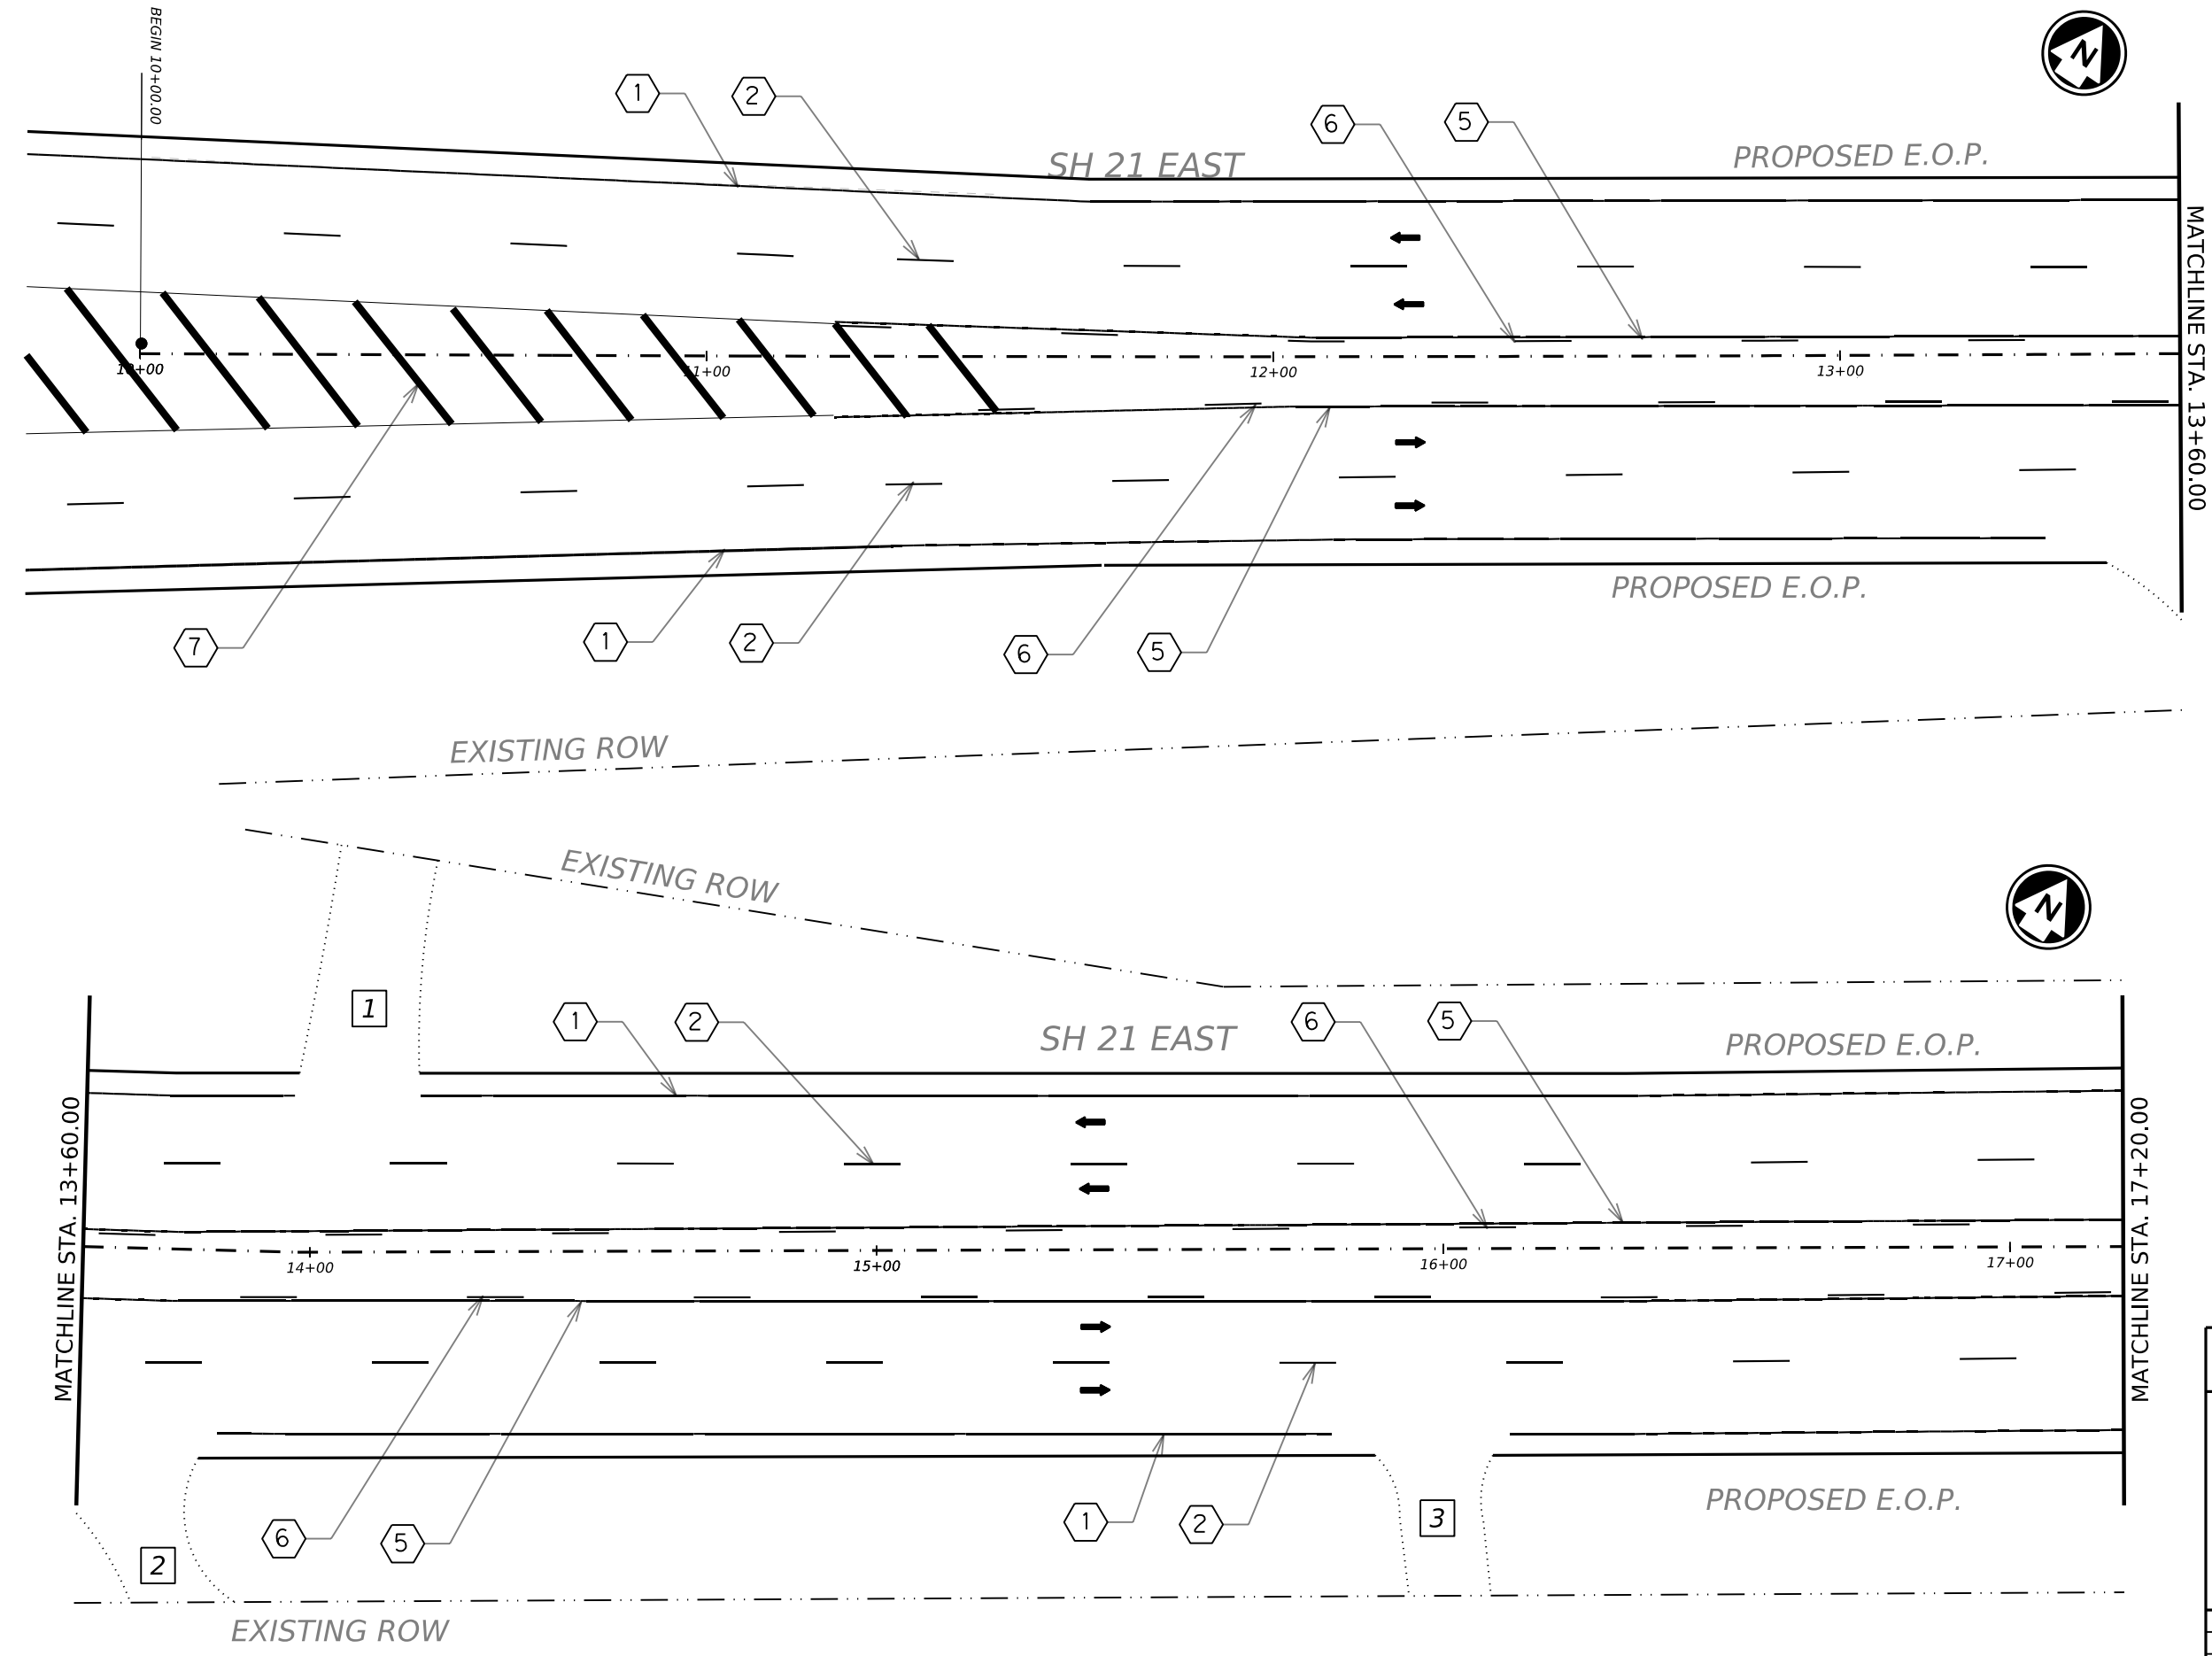

DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

This is a general layout for signs and pavement markings. see standards for placement details.

Texas Department of Transportation

SH 21


SIGNING, PAVEMENT MARKING AND DELINEATION LAYOUT

SHEET 2 OF 4


CONT	SECT	JOB	HIGHWAY
0472	01	050, ETC	SH 21
DIST	COUNTY	SHEET NO.	
AUS	BASTROP	17A	

DATE: _____
 FILE: _____

CK: DW: CK: DW: CK: DW:

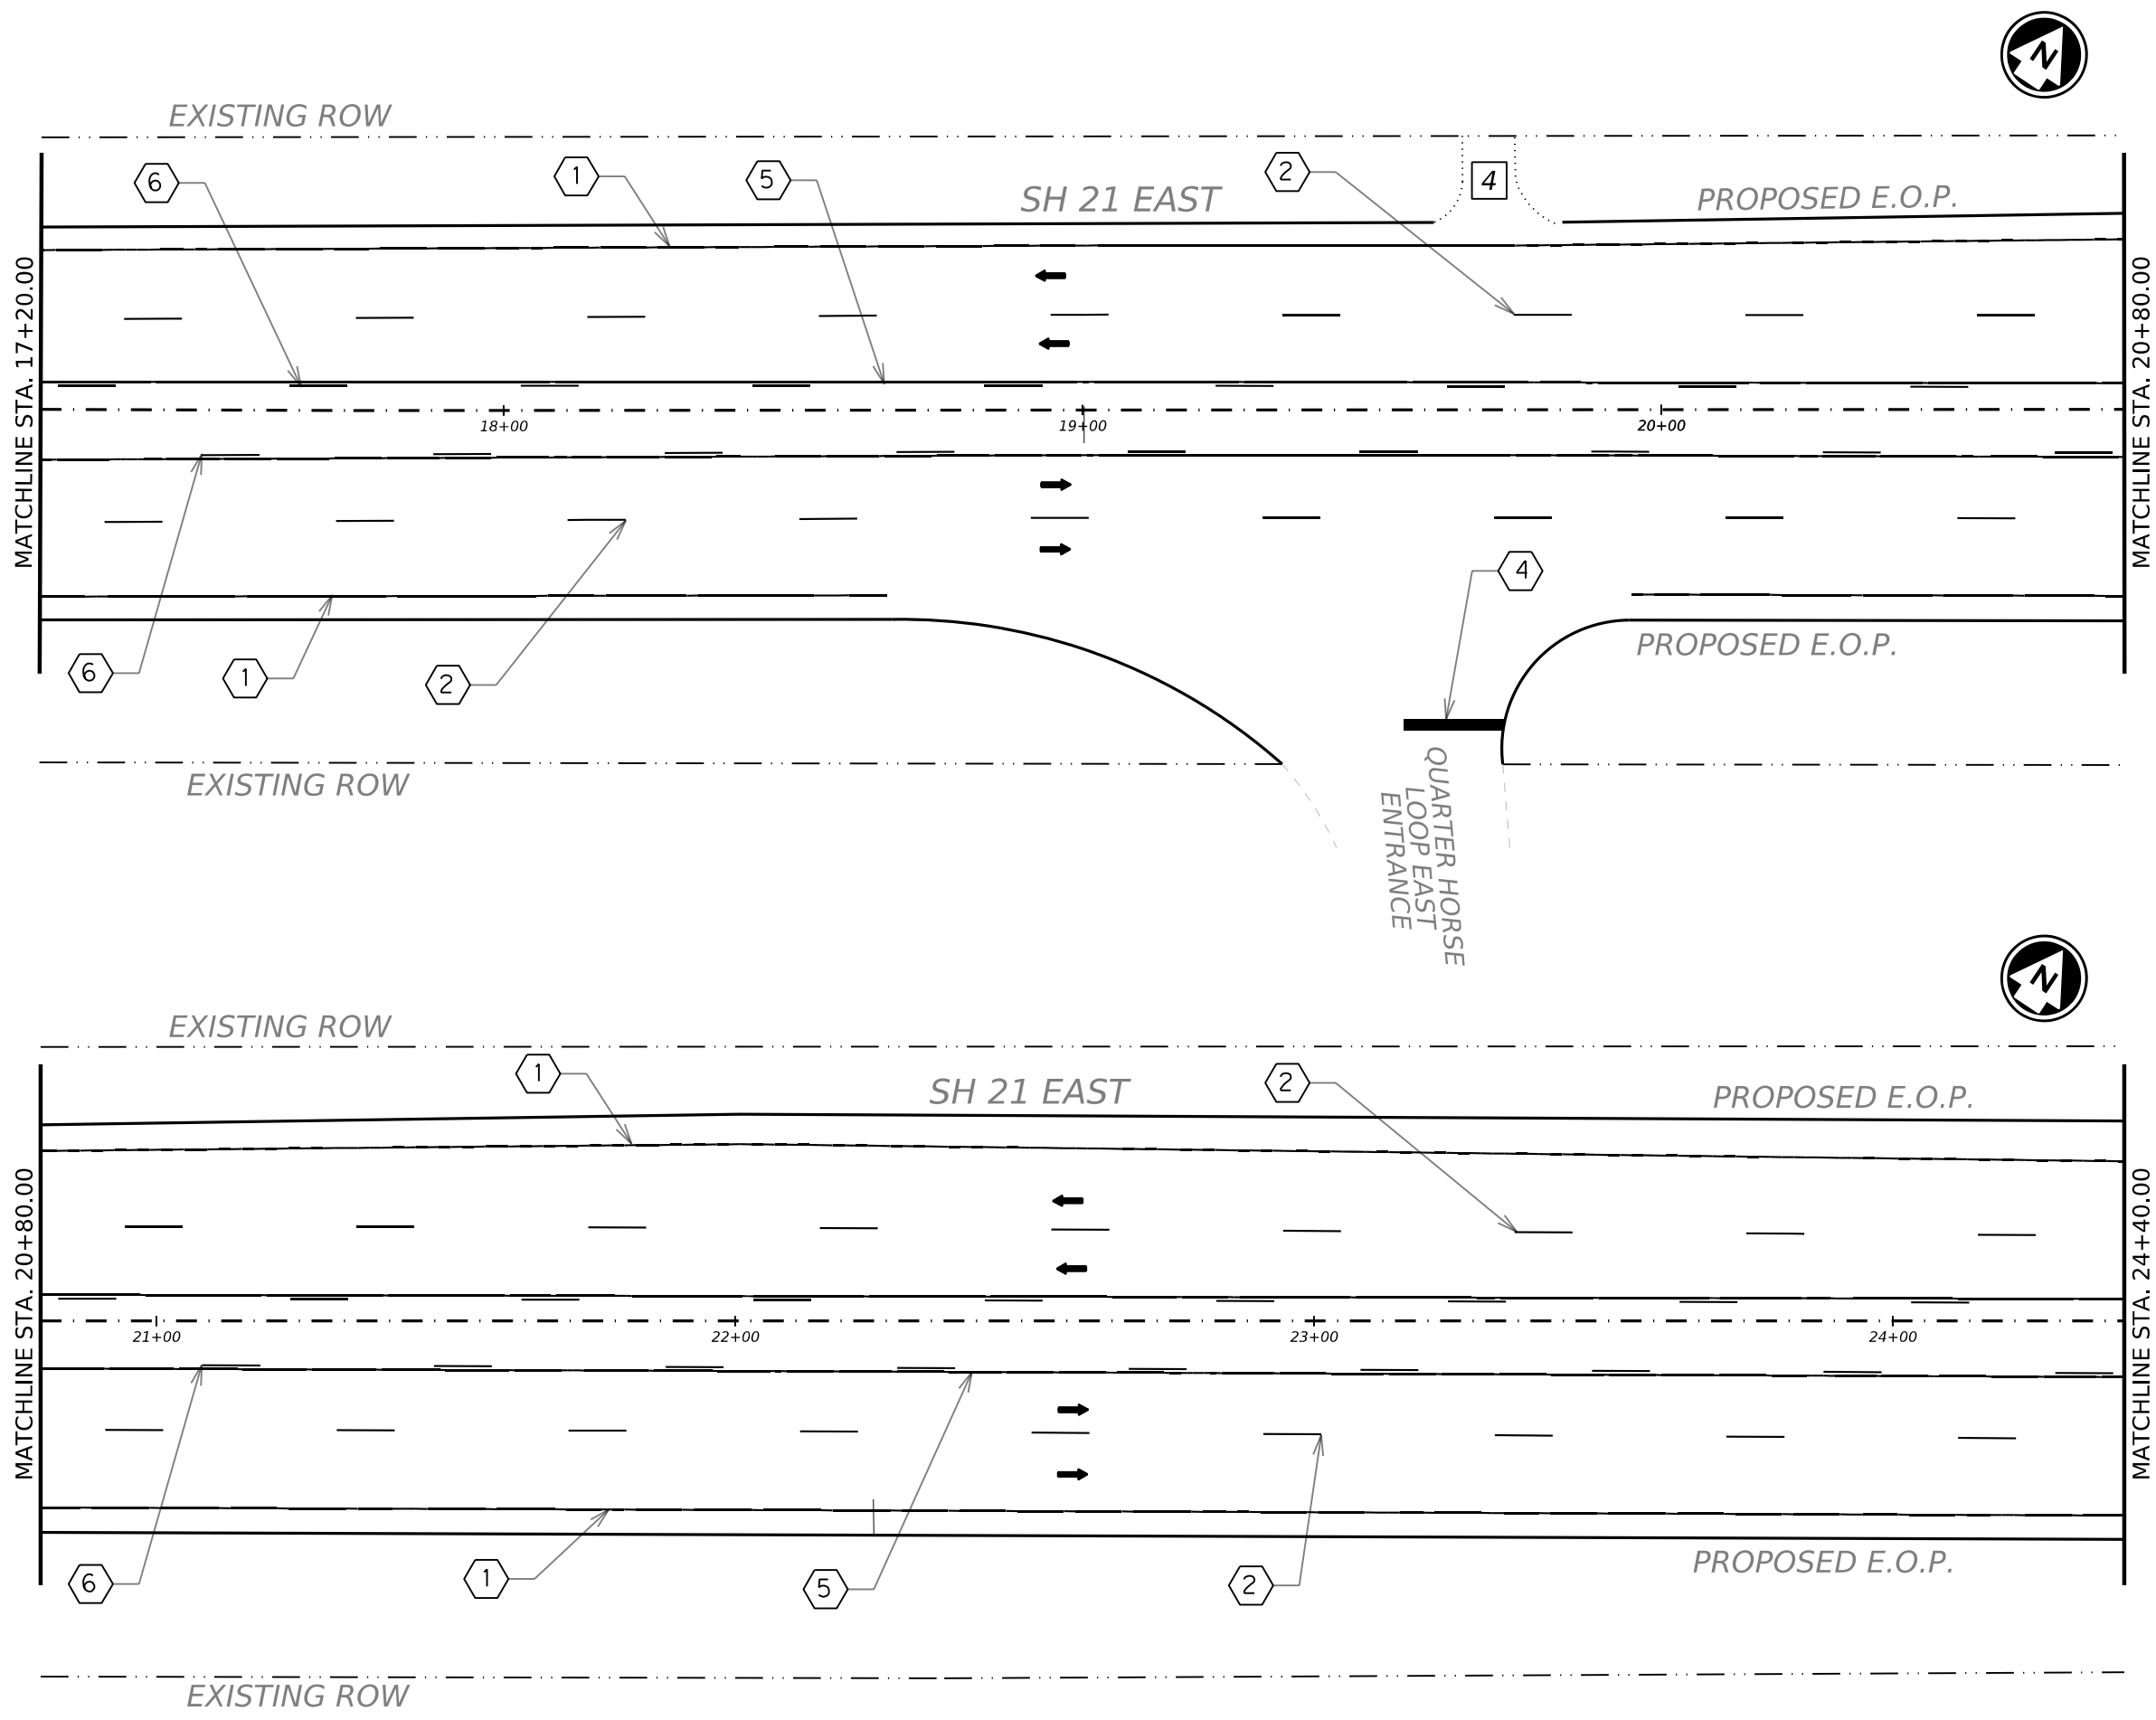

LEGEND	
←	TRAFFIC FLOW
ⓧ	DRIVEWAY NUMBER
PAVEMENT MARKINGS	
①	4" WHITE PROFILE
②	4" WHITE BROKEN
③	8" WHITE SOLID
④	24" WHITE SOLID
⑤	4" YELLOW PROFILE
⑥	4" YELLOW BROKEN
⑦	12" YELLOW SOLID



DocuSigned by:
 Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

This is a general layout for signs and pavement markings. see standards for placement details.

Texas Department of Transportation

SH 21


SIGNING, PAVEMENT MARKING AND DELINEATION LAYOUT

SHEET 3 OF 4

CONT	SECT	JOB	HIGHWAY
0472	05	050, ETC	SH 21
DIST	COUNTY	SHEET NO.	
AUS	BASTROP	17B	

DATE: \$DATE\$ TIME: \$TIME\$ FILE: \$SPECIMEN NAME\$

CK:
DW:
CK:
DN:

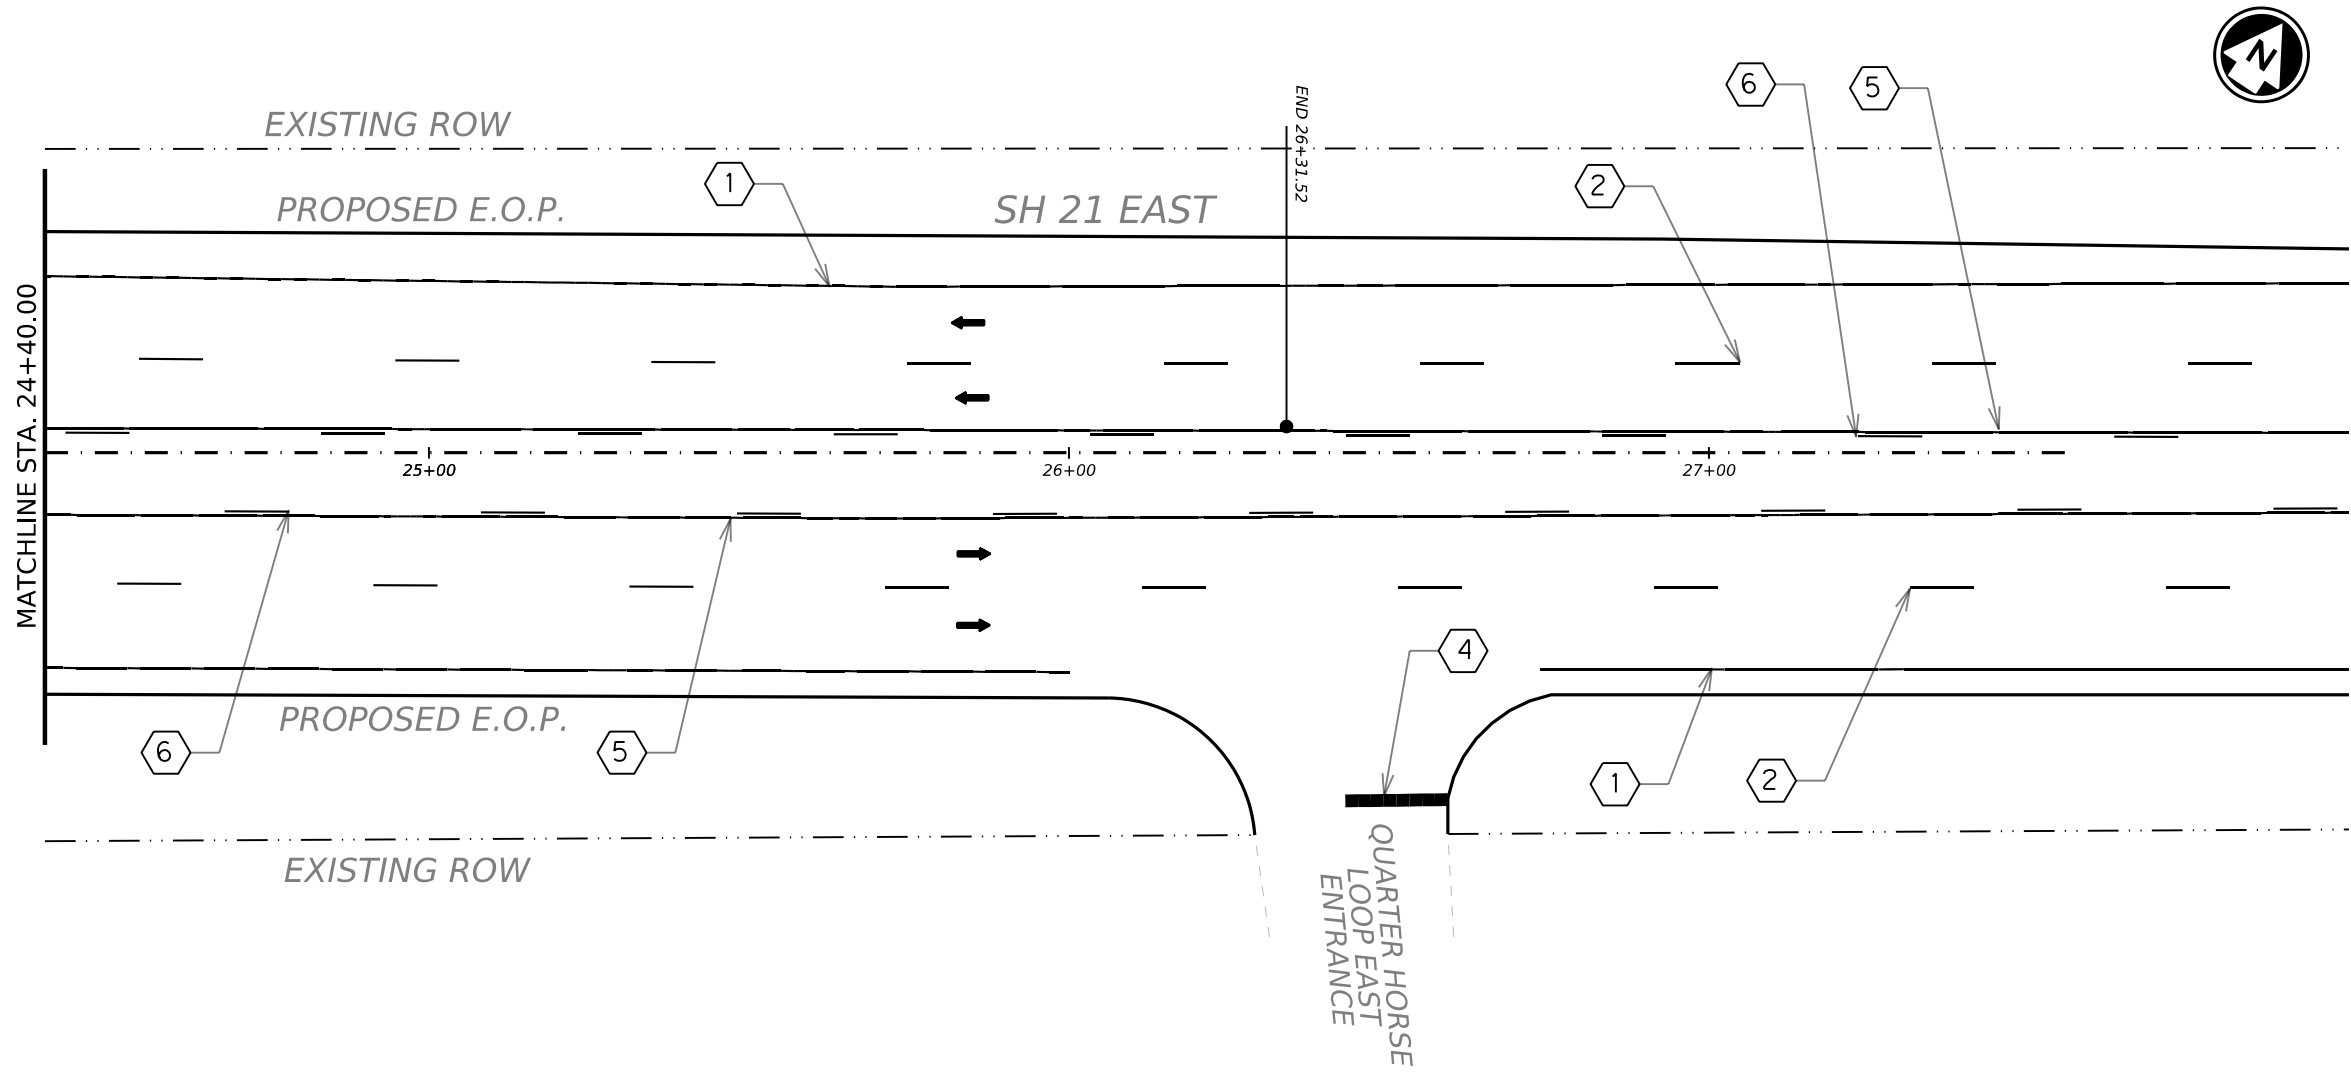

LEGEND

←	TRAFFIC FLOW
[X]	DRIVEWAY NUMBER
PAVEMENT MARKINGS	
①	4" WHITE PROFILE
②	4" WHITE BROKEN
③	8" WHITE SOLID
④	24" WHITE SOLID
⑤	4" YELLOW PROFILE
⑥	4" YELLOW BROKEN
⑦	12" YELLOW SOLID



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

This is a general layout for signs and pavement markings. see standards for placement details.

Texas Department of Transportation

SH 21


SIGNING, PAVEMENT MARKING AND DELINEATION LAYOUT

SHEET 4 OF 4


CONT	SECT	JOB	HIGHWAY
0472	01	050, ETC	SH 21, ETC
DIST	COUNTY	SHEET NO.	
AUS	BASTROP	17C	

DATE: \$DATE\$ TIME: \$TIME\$
 FILE: \$PROJECT\$ NAME

DW: _____
 CK: _____
 CC: _____

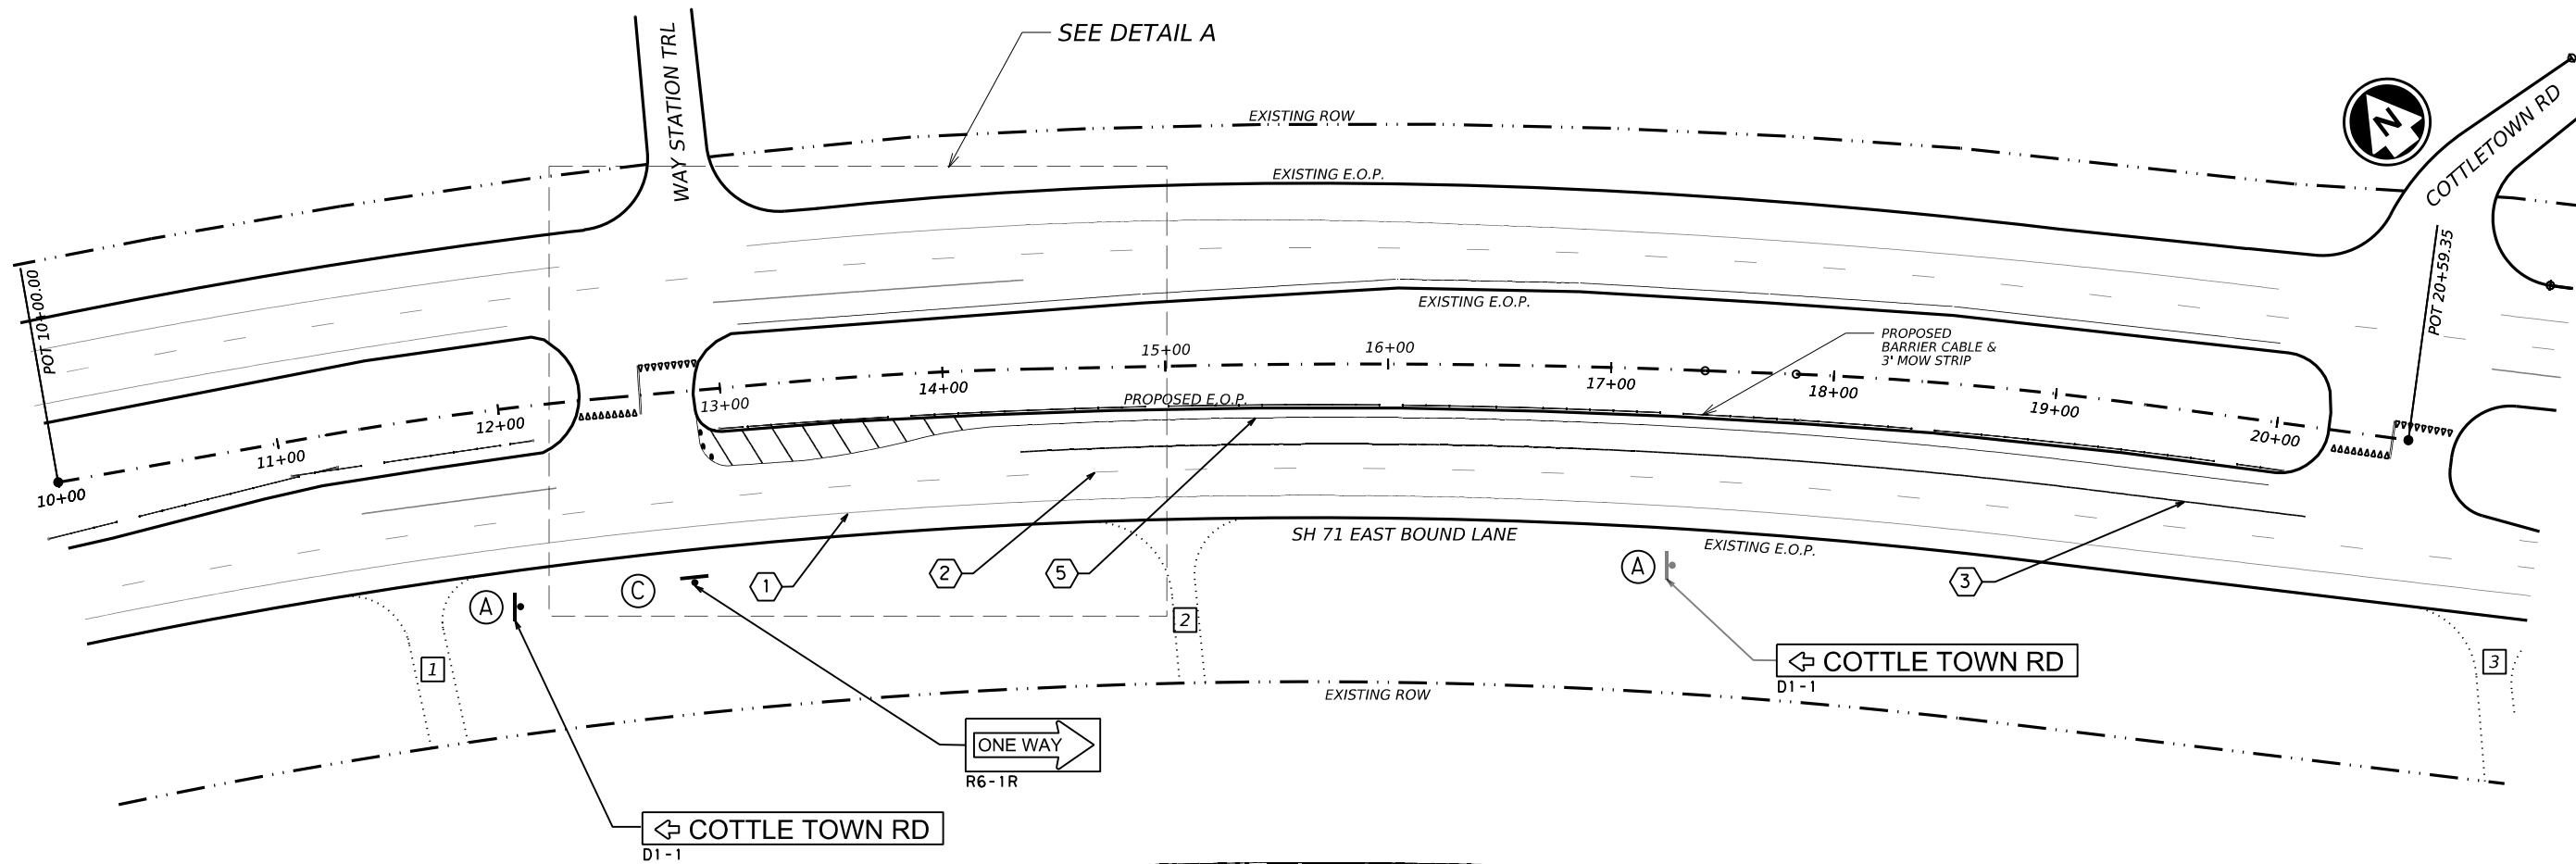

DETAIL A

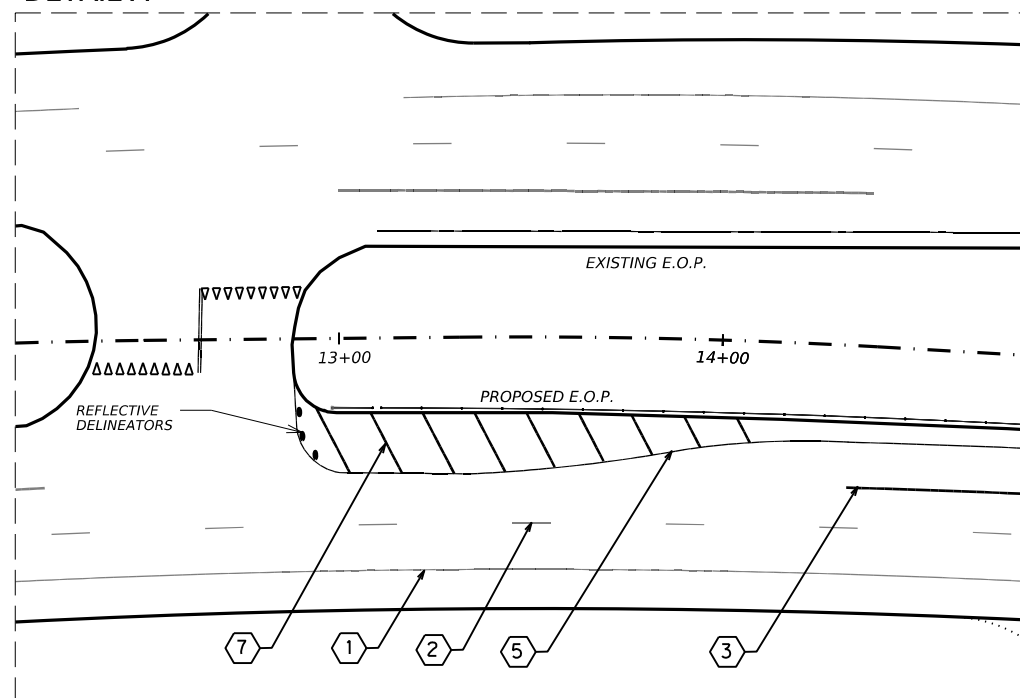


LEGEND

	TRAFFIC FLOW
	DRIVEWAY NUMBER
	SIGN POST
PAVEMENT MARKINGS	
	4" WHITE PROFILE
	4" WHITE BROKEN
	8" WHITE SOLID
	24" WHITE SOLID
	4" YELLOW PROFILE
	4" YELLOW BROKEN
	12" YELLOW SOLID

NOTES FOR SIGNS:

- (A) REMOVE AND RELOCATE EXISTING SIGN
- (B) ADD NEW SIGN SEE SOSS
- (C) NO CHANGES NEEDED AT THIS LOCATION



DocuSigned by:
Diana K. Schulze P.E.
 6775445255A3482...
 1/25/2023

This is a general layout for signs and pavement markings. see standards for placement details.

Texas Department of Transportation

SH 71

SIGNING, PAVEMENT MARKING AND DELINEATION LAYOUT

SHEET 1 OF 1



CONT	SECT	JOB	HIGHWAY
0265	05	089, ETC	SH 71
DIST		COUNTY	SHEET NO.
AUS		BASTROP	18

DATE: \$DATE\$ TIME: \$TIME\$
 FILE: \$SPECIMEN NAME\$

SUMMARY OF SMALL SIGNS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 8-16
 FILE:

PLAN SHEET NO.	SIGN NO.	SIGN NOMENCLATURE	SIGN	DIMENSIONS	FLAT ALUMINUM (TYPE A)	EXAL ALUMINUM (TYPE G)	SM RD SGN ASSM TY XXXXX (X) XX (X-XXXX)				BRIDGE MOUNT CLEARANCE SIGNS (See Note 2) TY = TYPE TY N TY S
							POST TYPE	POSTS	ANCHOR TYPE	MOUNTING DESIGNATION	
							FRP = Fiberglass TWT = Thin-Wall 10BWG = 10 BWG S80 = Sch 80	1 or 2	UA=Universal Conc UB=Universal Bolt SA=Slipbase-Conc SB=Slipbase-Bolt WS=Wedge Steel WP=Wedge Plastic	PREFABRICATED P = "Plain" T = "T" U = "U" 1EXT or 2EXT = # of Ext BM = Extruded Wind Beam WC = 1.12 #/ft Wing Channel EXAL= Extruded Alum Sign Panels	
XX	1	R3-9dP	 END R3-9dP	36" X 36"	X		10 BWG	1	SA	T	
XX	1	R3-9B	 CENTER LANE ONLY R3-9B	36" X 48"	X		10 BWG	1	SA	T	

Square Feet	Minimum Thickness
Less than 7.5	0.080"
7.5 to 15	0.100"
Greater than 15	0.125"

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:
<http://www.txdot.gov/>

- NOTE:**
- Sign supports shall be located as shown on the plans, except that the Engineer may shift the sign supports, within design guidelines, where necessary to secure a more desirable location or to avoid conflict with utilities. Unless otherwise shown on the plans, the Contractor shall stake and the Engineer will verify all sign support locations.
 - For installation of bridge mount clearance signs, see Bridge Mounted Clearance Sign Assembly (BMCS) Standard Sheet.
 - For Sign Support Descriptive Codes, see Sign Mounting Details Small Roadside Signs General Notes & Details SMD(GEN).


 Texas Department of Transportation	Traffic Operations Division Standard		
<h2 style="margin: 0;">SUMMARY OF SMALL SIGNS</h2> <h3 style="margin: 10px 0 0 0;">SOSS</h3>			
FILE: slums16.dgn © TxDOT May 1987	DN: TxDOT CONT SECT REVISIONS 4-16 0265 05 8-16	CK: TxDOT JOB 089, ETC COUNTY BASTROP	DW: TxDOT HIGHWAY SH 71, ETC SHEET NO. 19

SUMMARY OF RCP PARALLEL DRAINAGE STRUCTURES

LOCATION	DESCRIPTION	DISPOSITION	432-6001	464-6003	464-6005	464-6031	465-6005	467-6341	467-6363	467-6395	467-6531	467-6545	467-6580	496-6007	496-6091												
			RIPRAP (CONC) (4 in)	RC PIPE (CL I I I) (18 IN)	RC PIPE (CL I I I) (24 IN)	RC PIPE (ARCH) (CL I I I) (DES 2)	JCTBOX (Cmpl) (PJB) (3FTX3FT)	SET (TY II) (15 IN) (RCP) (6:1) (P)	SET (TY II) (18 IN) (RCP) (6:1) (P)	SET (TY II) (24 IN) (RCP) (6:1) (P)	SET (TY II) (DES 2) (RCP) (6:1) (P)	SET (TY II) (DES 3) (RCP) (6:1) (P)	SET (REMOV)	REMOV STR (PIPE)	REMOV STR (CURB)	CY	LF	LF	LF	EA	EA	EA	EA	EA	EA	EA	EA
STA 13+55 RT	18" X 32' CMP	REMOVE EXISTING PIPE & SET/ ADD 18" X 32' RCP & 2-SET		32							2					2	32										
STA 14+03 LT	18" X 48' RCP	REMOVE EXISTING PIPE & SET/ ADD 18" X 32' RCP & 2-SET		48							2					2	48										
STA 15+93 RT	18" X 24' RCP	REMOVE EXISTING PIPE & SET/ ADD 18" X 32' RCP & 2-SET		24							2					2	24										
STA 19+64 LT	18" X 36' RCP	REMOVE EXISTING PIPE & SET/ ADD 18" X 32' RCP & 2-SET		36							2					2	36										

NOT TO SCALE

**Austin District
Bastrop Area Office**




**SUMMARY OF
PARALLEL DRAINAGE
STRUCTURES
RC PIPE
SH 21**

© 2022	CONT	SECT	JOB	HIGHWAY
	0265	05	089, ETC	SH 71
	DIST		COUNTY	SHEET NO.
	AUS		BASTROP	20

DATE: \$DATE\$ TIME: \$TIME\$ FILE: \$FILE\$

CUT & RESTORE PAVEMENT TYPICAL

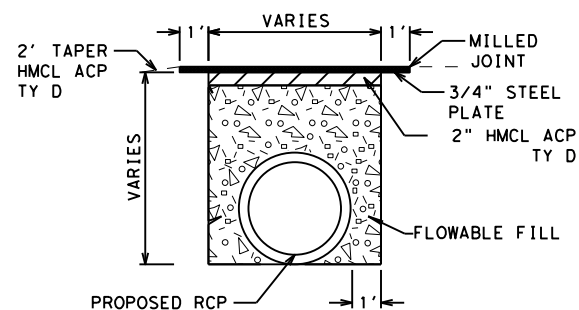


NOTE: HMCL (TY D) WILL BE PLACED ONCE THE FLOWABLE BACKFILL IS CURED.

PLACEMENT OF HMCL (TY D) AND STEEL PLATE ARE SUBSIDIARY TO CUT & RESTORE PAVEMENT.

SEQUENCE AS FOLLOWS:

- 1) CONDUCT ONE-WAY TRAFFIC CONTROL.
- 2) REMOVE EXISTING CMP AND INSTALL CBC (LEFT). CBC WILL BE TEMPORARILY PLUGGED AS APPROVED BY THE ENGINEER.
- 3) REMOVE EXISTING CMP AND INSTALL CBC (RIGHT).
- 4) SWITCH TRAFFIC BACK TO TWO-WAY TRAFFIC.



DocuSigned by:
Diana K. Schulze P.E.
6775445255A3482...
1/25/2023

**Austin District
Bastrop Area Office**



**SH 21
CUT & RESTORE
PAVEMENT
DETAILS**

© 2023	CONT	SECT	JOB	HIGHWAY
	0265	05	089	SH 71, ETC
	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	20A	

DATE: \$DATE\$
FILE: \$FILE\$

STORMWATER POLLUTION PREVENTION PLAN (SWP3):

This SWP3 has been developed in accordance with the TPDES Construction General Permit TXR150000 (CGP). The Texas Department of Transportation (TxDOT) ensures that project specifications include adequate best management practices (BMPs) for this project.

For all projects with any soil disturbing activities, TxDOT will maintain a SWP3 with all pertinent records, correspondence, environmental documents, etc. at the project field office. If no field office is available, then this SWP3 shall be kept in the appropriate TxDOT Area Office.

This SWP3 is consistent with requirements specified in applicable stormwater plans and the projects environmental permits, issues, and commitments (EPICs). A copy of the CGP is included in Attachment 2.12 of the SWP3 binder.

1.0 SITE/PROJECT DESCRIPTION

1.1 PROJECT CONTROL SECTION JOB (CSJ):

1.2 PROJECT LIMITS:

From: _____

To: _____

1.3 PROJECT COORDINATES:

BEGIN: (Lat)_____,(Long)_____

END: (Lat)_____,(Long)_____

1.4 TOTAL PROJECT AREA (Acres): 8.70

1.5 TOTAL AREA TO BE DISTURBED (Acres): 1.88

1.6 NATURE OF CONSTRUCTION ACTIVITY:

1.7 MAJOR SOIL TYPES:

Soil Type	Description
PaPaE	Padina Fine Sand 1-2% Slope
DeC	Robco-Tanglewood Complex 1-5% Slope
PaE	Padina Fine Sand 1-12% Slope
MaE	Mabank Loam 0-1% Slope

1.8 PROJECT SPECIFIC LOCATIONS (PSLs):

PSLs must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. PSLs may be identified during preconstruction meetings or during the construction process. Please choose from the options below:

- PSLs determined during preconstruction meeting
- PSLs determined during construction
- No PSLs planned for construction

Type	Sheet #s

All off-ROW PSLs required by the Contractor are the Contractor's responsibility. The Contractor shall secure all permits required by local, state, federal laws for off-ROW PSLs. The contractor shall provide diagrams, areas of disturbance, acreage, and BMPs for all off-ROW PSLs within one mile of the project.

1.9 CONSTRUCTION ACTIVITIES:

(Use the following list as a starting point when developing the Construction Activity Schedule and Ceasing Record in Attachment 2.5.)

- Mobilization
- Install sediment and erosion controls
- Blade existing topsoil into windrows, prep ROW, clear and grub
- Remove existing pavement
- Grading operations, excavation, and embankment
- Excavate and prepare subgrade for proposed pavement widening
- Remove existing culverts, safety end treatments (SETs)
- Remove existing metal beam guard fence (MBGF), bridge rail
- Install proposed pavement per plans
- Install culverts, culvert extensions, SETs
- Install mow strip, MBGF, bridge rail
- Place flex base
- Rework slopes, grade ditches
- Blade windrowed material back across slopes
- Revegetation of unpaved areas
- Achieve site stabilization and remove sediment and erosion control measures
- Other: _____
- Other: _____
- Other: _____

1.10 POTENTIAL POLLUTANTS AND SOURCES:

- Sediment laden stormwater from stormwater conveyance over disturbed area
- Fuels, oils, and lubricants from construction vehicles, equipment, and storage
- Solvents, paints, adhesives, etc. from various construction activities
- Transported soils from offsite vehicle tracking
- Construction debris and waste from various construction activities
- Contaminated water from excavation or dewatering pump-out water
- Sanitary waste from onsite restroom facilities
- Trash from various construction activities/receptacles
- Long-term stockpiles of material and waste
- Other: _____
- Other: _____
- Other: _____

1.11 RECEIVING WATERS:

Receiving waters must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. Include Segment # for receiving waters.

Tributaries	Classified Waterbody
ALUM CREEK	1434G

* Add (*) for impaired waterbodies with pollutant in ().

1.12 ROLES AND RESPONSIBILITIES: TxDOT

- Development of plans and specifications
- Submit Notice of Intent (NOI) to TCEQ (≥5 acres)
- Post Construction Site Notice
- Submit NOI/CSN to local MS4
- Perform SWP3 inspections
- Maintain SWP3 records and update to reflect daily operations
- Complete and submit Notice of Termination to TCEQ
- Maintain SWP3 records for 3 years
- Other: _____
- Other: _____
- Other: _____

1.13 ROLES AND RESPONSIBILITIES: CONTRACTOR

- Day To Day Operational Control
- Submit Notice of Intent (NOI) to TCEQ (≥5 acres)
- Post Construction Site Notice
- Submit NOI/CSN to local MS4
- Maintain schedule of major construction activities
- Install, maintain and modify BMPs
- Complete and submit Notice of Termination to TCEQ
- Maintain SWP3 records for 3 years
- Other: _____
- Other: _____
- Other: _____

1.14 LOCAL MUNICIPAL SEPARATE STORM SEWER SYSTEM (MS4) OPERATOR COORDINATION:

MS4 Entity

STORMWATER POLLUTION PREVENTION PLAN (SWP3)



Sheet 1 of 2

FED. RD. DIV. NO.	PROJECT NO.		SHEET NO.
	STP 2023(734)HES		21
STATE	STATE DIST.	COUNTY	
TEXAS		BASTROP	
CONT.	SECT.	JOB	HIGHWAY NO.
0265	05	089, ETC	SH 71, ETC

STORMWATER POLLUTION PREVENTION PLAN (SWP3):

2.0 BEST MANAGEMENT PRACTICES (BMPs) AND CONTROLS, INSPECTION, AND MAINTENANCE

The Contractor shall be the responsible party for implementing the BMPs described herein and for complying with the SWP3 for control of erosion and sedimentation during day-to-day operations. The Contractor shall implement changes to this SWP3 approved by TxDOT within the times specified in this SWP3 or the CGP.

2.1 EROSION CONTROL AND SOIL STABILIZATION BMPs:

T / P

- Protection of Existing Vegetation
- Vegetated Buffer Zones
- Soil Retention Blankets
- Geotextiles
- Mulching/ Hydromulching
- Soil Surface Treatments
- Temporary Seeding
- Permanent Planting, Sodding or Seeding
- Biodegradable Erosion Control Logs
- Rock Filter Dams/ Rock Check Dams
- Vertical Tracking
- Interceptor Swale
- Riprap
- Diversion Dike
- Temporary Pipe Slope Drain
- Embankment for Erosion Control
- Paved Flumes
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.2 SEDIMENT CONTROL BMPs:

T / P

- Biodegradable Erosion Control Logs
- Dewatering Controls
- Inlet Protection
- Rock Filter Dams/ Rock Check Dams
- Sandbag Berms
- Sediment Control Fence
- Stabilized Construction Exit
- Floating Turbidity Barrier
- Vegetated Buffer Zones
- Vegetated Filter Strips
- Other: _____
- Other: _____
- Other: _____
- Other: _____

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

Sediment control BMPs requiring design capacity calculations (See SWP3 Attachment 1.3.):

T / P

- Sediment Trap
 - Calculated volume runoff from 2-year, 24-hour storm for each acre of disturbed area
 - 3,600 cubic feet of storage per acre drained
- Sedimentation Basin
 - Not required (<10 acres disturbed)
 - Required (>10 acres) and implemented.
 - Calculated volume runoff from 2-year, 24-hour storm for each acre of disturbed area
 - 3,600 cubic feet of storage per acre drained
 - Required (>10 acres), but not feasible due to:
 - Available area/Site geometry
 - Site slope/Drainage patterns
 - Site soils/Geotechnical factors
 - Public safety
 - Other: _____

2.3 PERMANENT CONTROLS:

(Coordinate post-construction BMPs with appropriate TxDOT maintenance sections.)

BMPs To Be Left In Place Post Construction:

Type	Stationing	
	From	To

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.4 OFFSITE VEHICLE TRACKING CONTROLS:

- Excess dirt/mud on road removed daily
- Haul roads dampened for dust control
- Loaded haul trucks to be covered with tarpaulin
- Stabilized construction exit
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.5 POLLUTION PREVENTION MEASURES:

- Chemical Management
- Concrete and Materials Waste Management
- Debris and Trash Management
- Dust Control
- Sanitary Facilities
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.6 VEGETATED BUFFER ZONES:

Natural vegetated buffers shall be maintained as feasible to protect adjacent surface waters. If vegetated natural buffer zones are not feasible due to site geometry, the appropriate additional sediment control measures have been incorporated into this SWP3.

Type	Stationing	
	From	To

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.7 ALLOWABLE NON-STORMWATER DISCHARGES:

- Fire hydrant flushings
- Irrigation drainage
- Pavement washwater (where spills or leaks have not occurred, and detergents are not used)
- Potable water sources
- Springs
- Uncontaminated groundwater
- Water used to wash vehicles or control dust
- Other allowable non-stormwater discharges as allowed by TPDES GP TXR150000.

2.8 INSPECTIONS:

All disturbed areas and erosion and sediment control devices shall be inspected at least once every seven (7) days. Inspections shall be performed by TxDOT as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.5 of this SWP3 .

2.9 MAINTENANCE:

Control measures shall be properly installed according to specifications. If it is determined that a BMP or control measure is not operating effectively, maintenance must be accomplished as soon as possible and before the next anticipated rain event, but in no case later than 7 calendar days after being able to access the site. Maintenance shall be performed by the Contractor as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.5 of this SWP3.

STORMWATER POLLUTION PREVENTION PLAN (SWP3)



FED. RD. DIV. NO.	PROJECT NO.		SHEET NO.
	STP 2023(734)HES		21A
STATE	STATE DIST.	COUNTY	
TEXAS		BASTROP	
CONT.	SECT.	JOB	HIGHWAY NO.
0265	05	089, ETC	SH 71, ETC

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

1.
2.
 No Action Required Required Action

Action No.

- Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
- Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
- Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
- When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
 Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
 Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
 Individual 404 Permit Required
 Other Nationwide Permit Required: NWP# _____

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

1.
2.
3.
4.

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input checked="" type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required Required Action

Action No.

1.
2.
3.
4.

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required Required Action

Action No.

1.
2.
3.
4.

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

- No Action Required Required Action

Action No.

- Houston Toad Habitat - See General Notes - Item 7
-
-
-

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used. Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- * Dead or distressed vegetation (not identified as normal)
- * Trash piles, drums, canister, barrels, etc.
- * Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required Required Action

Action No.

1.
2.
3.


VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)


- No Action Required Required Action

Action No.


- Notify the local floodplain administrator as necessary and to comply with all applicable rules and regulations regarding the hydraulic design of the project.
-
-

 Texas Department of Transportation		<i>Design Division Standard</i>	
ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS EPIC			
FILE: epic.dgn	DN: TxDOT	CK: RG	DW: VP
©TxDOT: February 2015	CONT	SECT	JOB
12-12-2011 (DS) REVISIONS	0265	05	089, ETC
05-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY	SH 71, ETC
01-23-2015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	AUS	BASTROP	SHEET NO. 23




 HOUSTON TOAD KNOWN AND POTENTIAL HABITAT

NOTES:
1- SEE EPIC SHEET AND GENRAL NOTES (ITEM 7) FOR ADDITIONAL HOUSTON TOAD NOTES

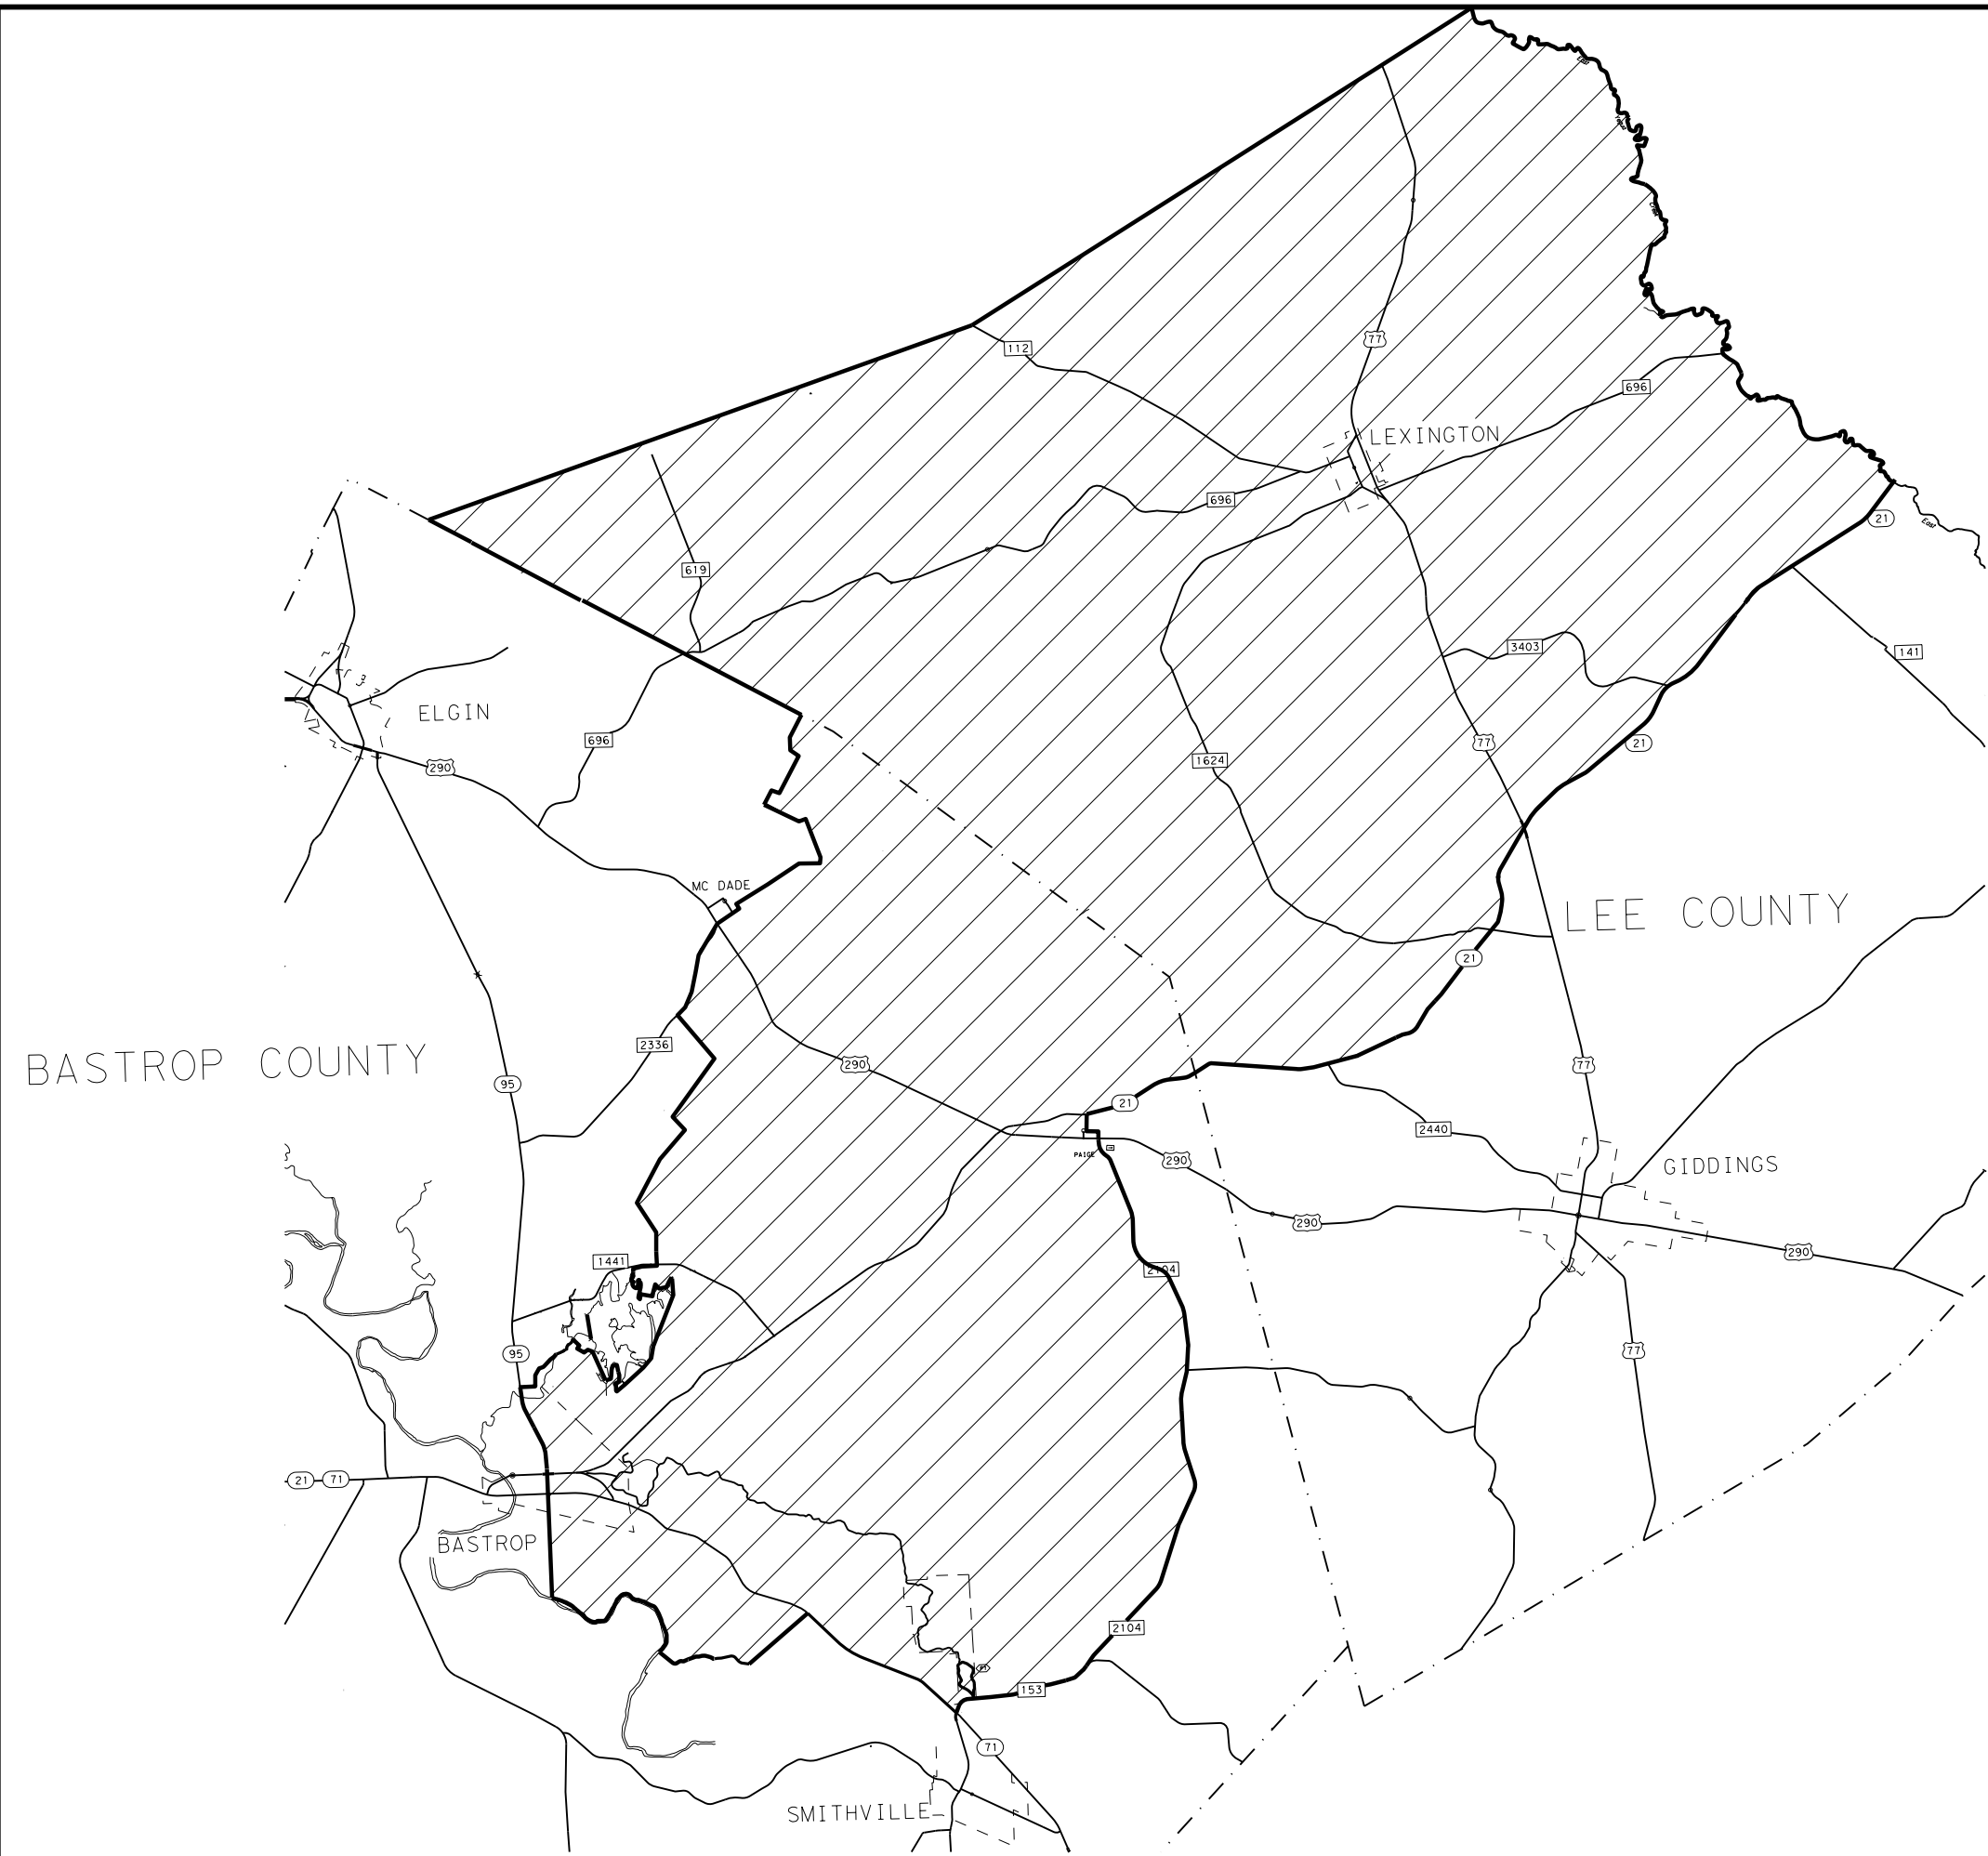

DATE: \$DATES \$TIMES
FILE: \$FILES

**Austin District
Bastrop Area Office**



LOST PINE
HABITAT
CONSERVATION
PLAN AREA

© 2022	CONT	SECT	JOB	HIGHWAY
	0265	05	089, ETC	SH 71
	DIST	COUNTY		SHEET NO.
	AUS	BASTROP		24

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
 FILE:

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:



1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).


<p>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov</p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12

 Texas Department of Transportation		 Traffic Safety Division Standard	
<p>BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS</p> <p>BC (1) -21</p>			
FILE:	bc-21.dgn	DN:	TxDOT
© TxDOT	November 2002	CONT SECT:	0265 05
REVISIONS	JOB	DIST	COUNTY
4-03 7-13	089, ETC	AUS	BASTROP
9-07 8-14	SH 71, ETC	SHEET NO.	25
5-10 5-21			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPICAL LOCATION OF CROSSROAD SIGNS

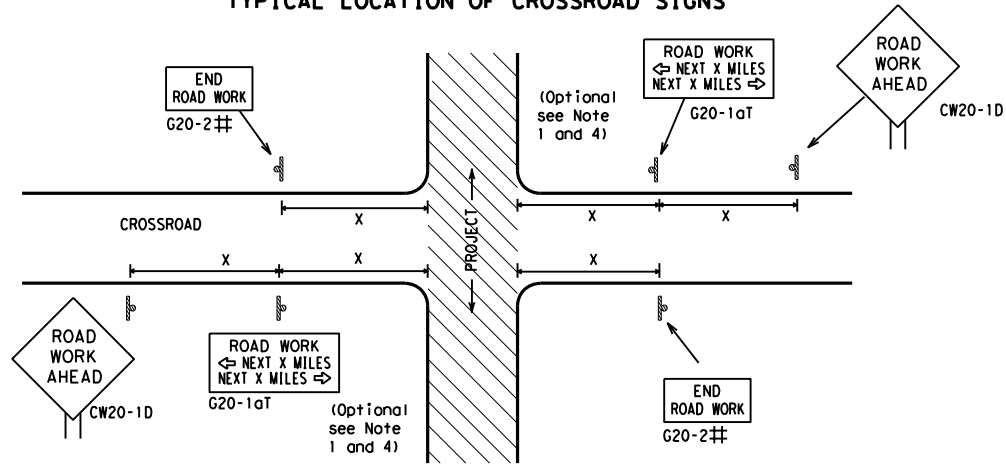

May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

1. The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
3. Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
4. The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
6. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

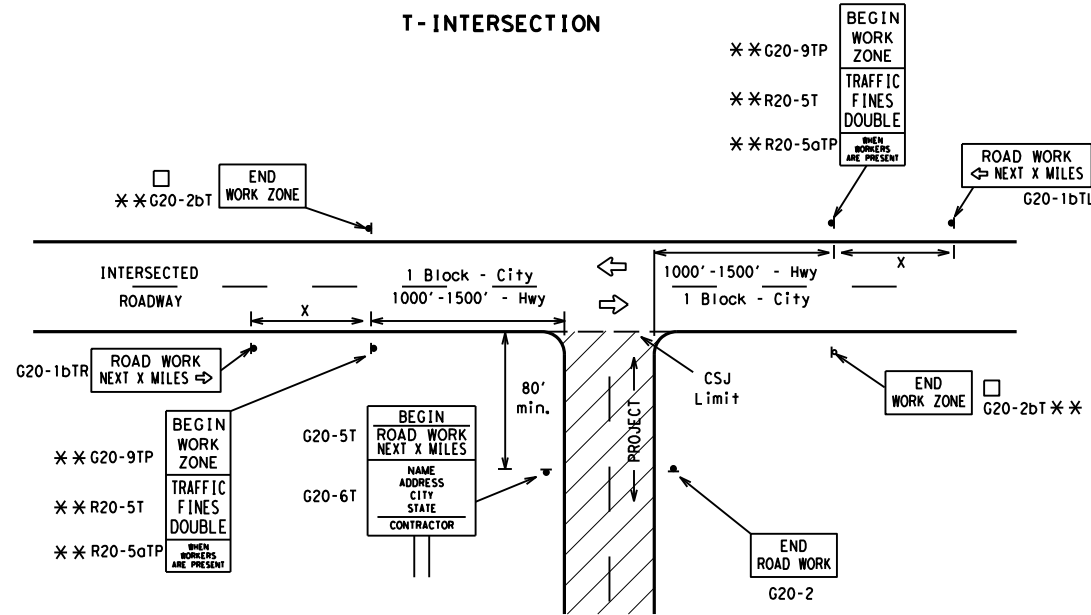

CSJ LIMITS AT T-INTERSECTION

1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{1,5,6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
			55	500 ²
			60	600 ²
			65	700 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	70	800 ²
			75	900 ²
			80	1000 ²
			*	* ³


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


1. Special or larger size signs may be used as necessary.
2. Distance between signs should be increased as required to have 1500 feet advance warning.
3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
4. 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
5. Only diamond shaped warning sign sizes are indicated.
6. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

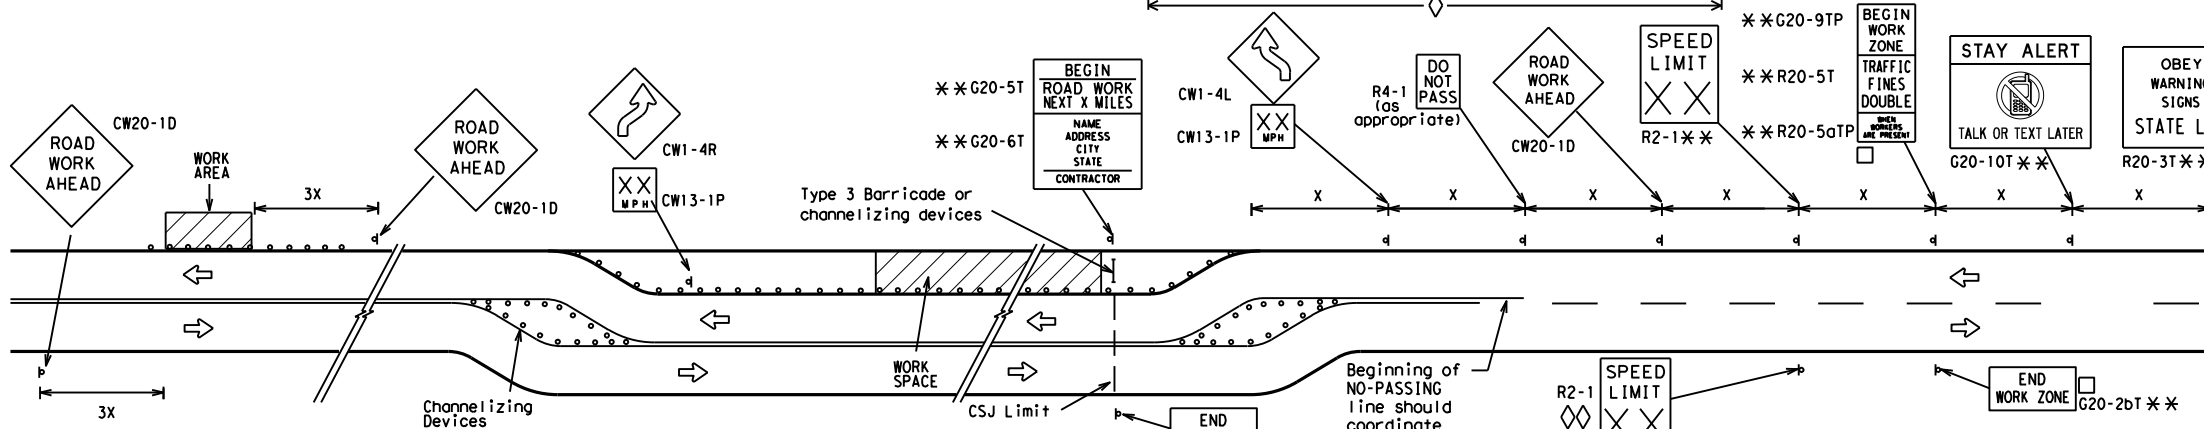


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

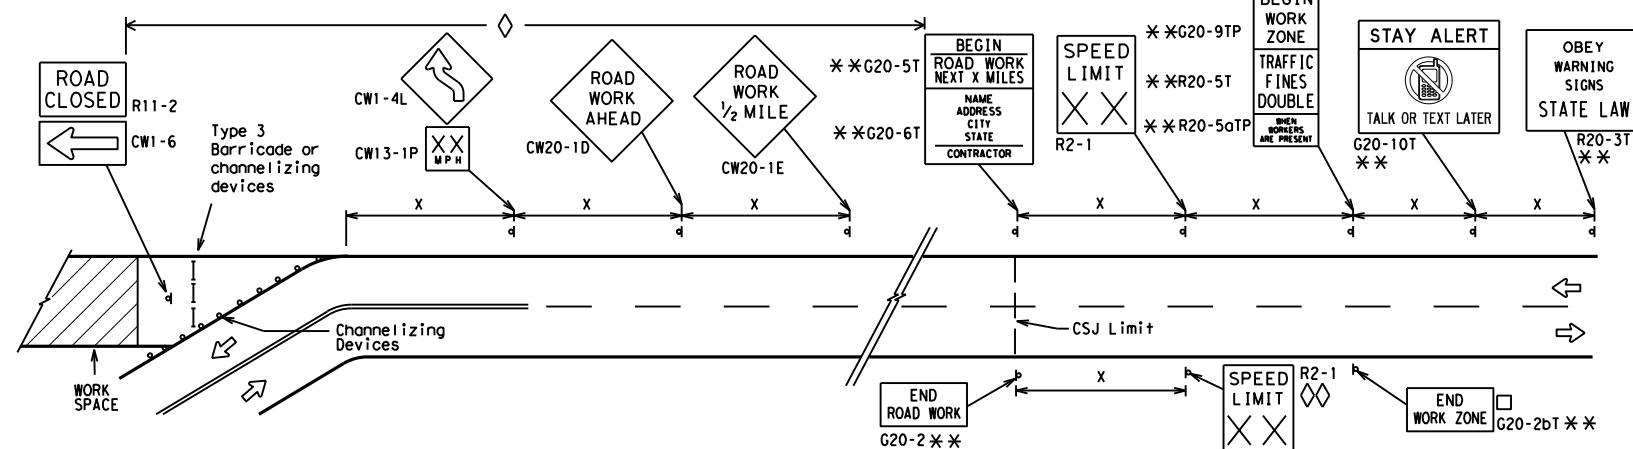

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS

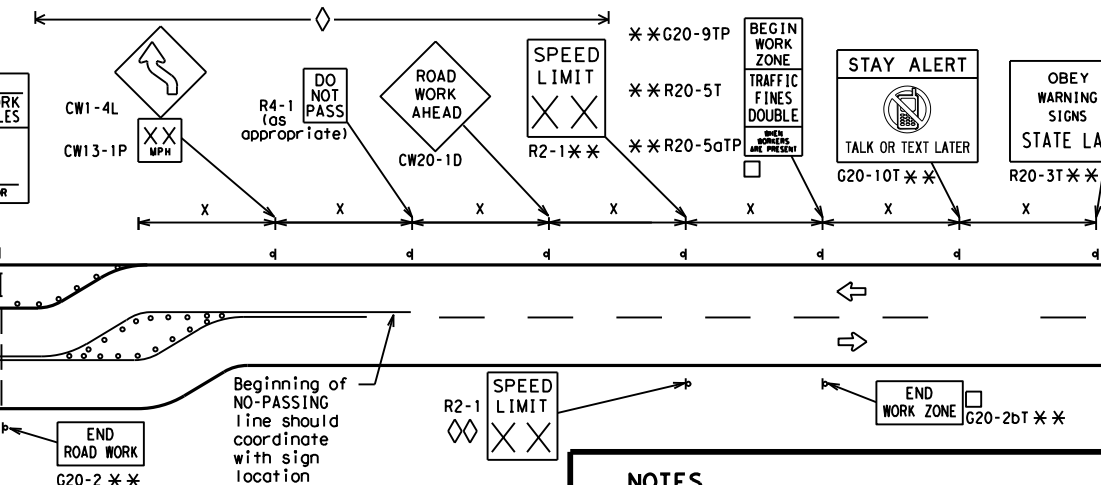

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "x" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
- CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
- Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND	
—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC(2)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AUS	BASTROP	26	

DATE: FILE:

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

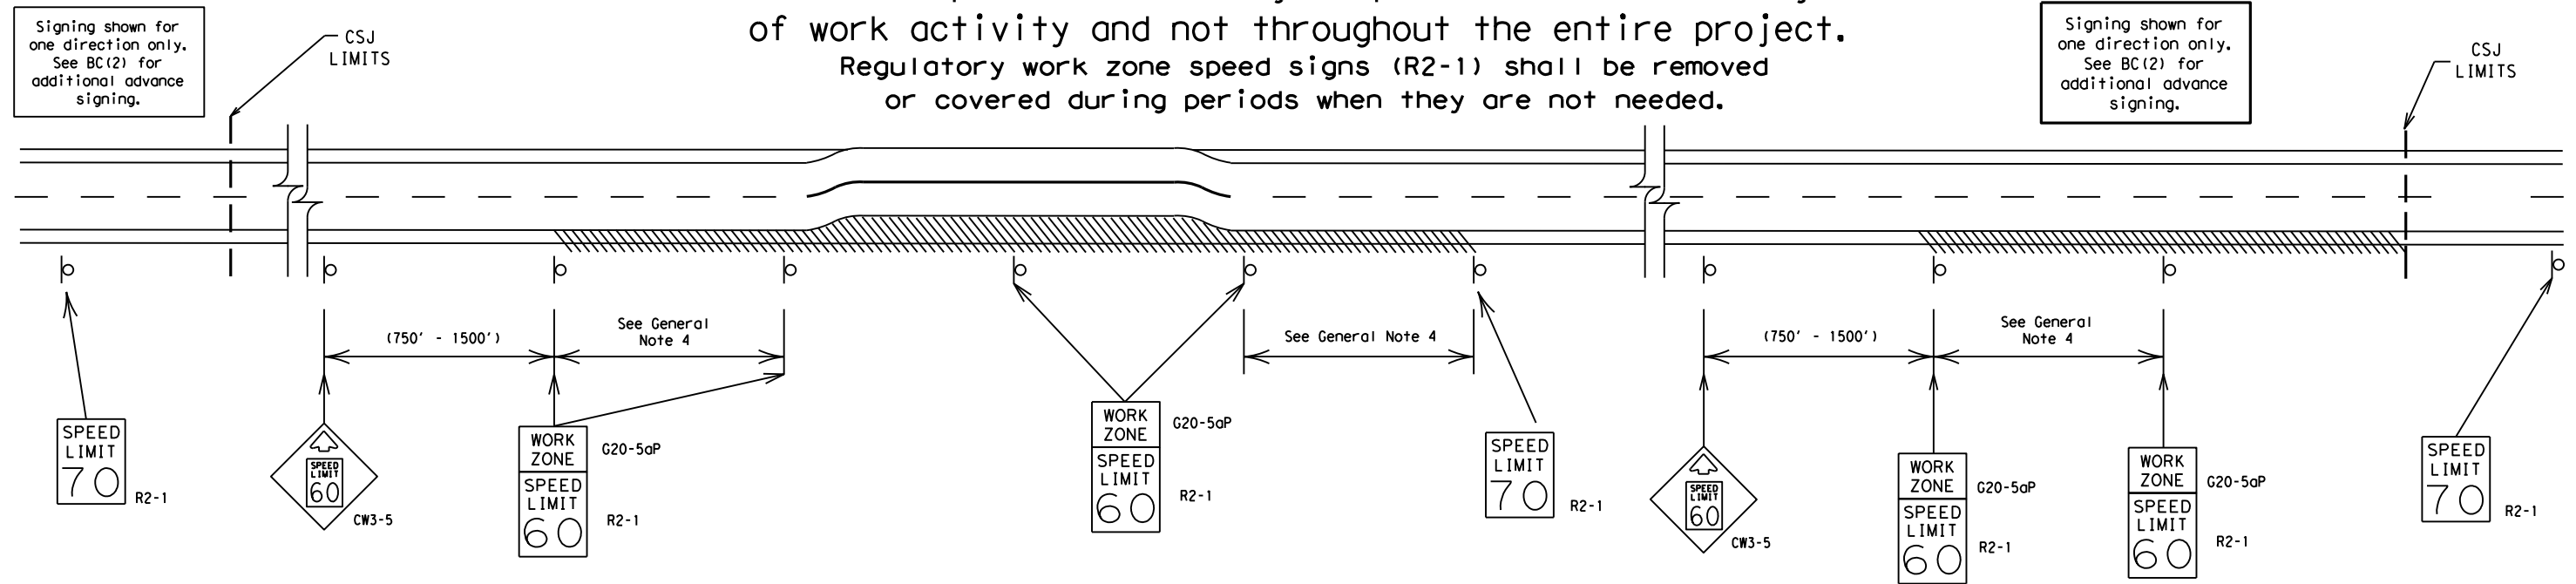

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Law enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

SHEET 3 OF 12




BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

BC (3) - 21

FILE:	bc-21.dgn	DW:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT:	0265	SECT:	05	JOB:	089, ETC	SH:	71, ETC
REVISIONS		DIST:	AUS	COUNTY:	BASTROP	SHEET NO.:	27		
9-07	8-14								
7-13	5-21								

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

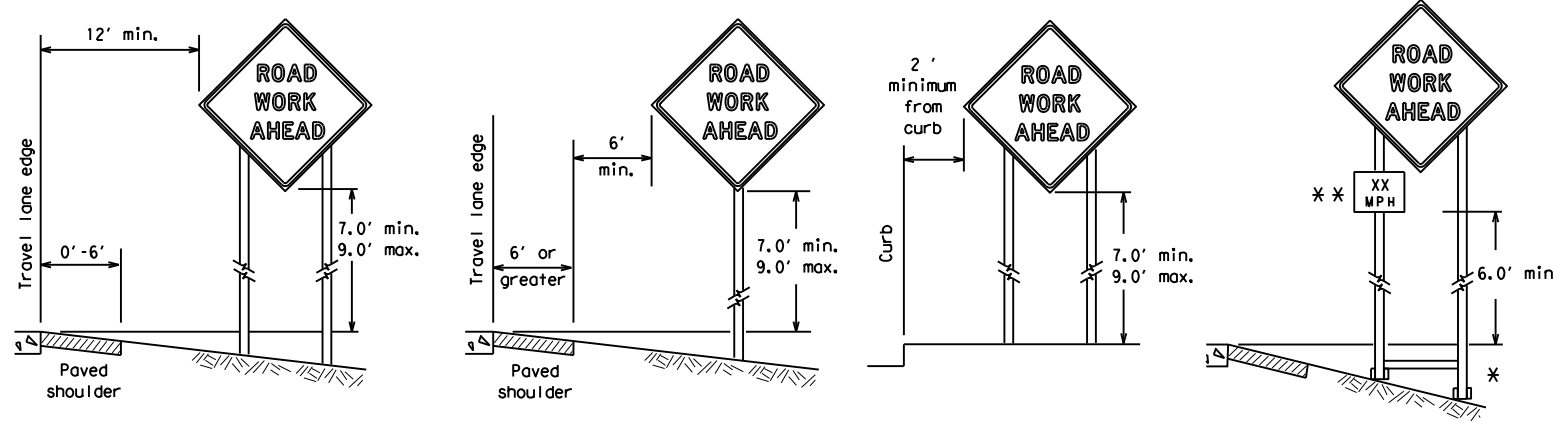

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

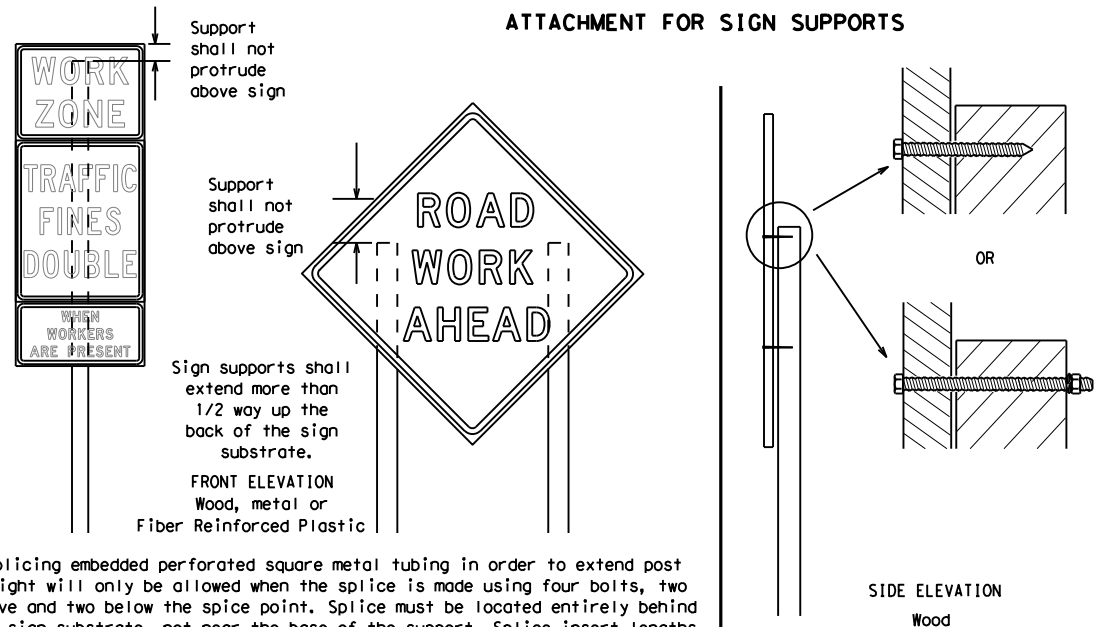

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - Long-term stationary - work that occupies a location more than 3 days.
 - Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - Short, duration - work that occupies a location up to 1 hour.
 - Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

- The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

- All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS


- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

- Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

STOP/SLOW PADDLES

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflective when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

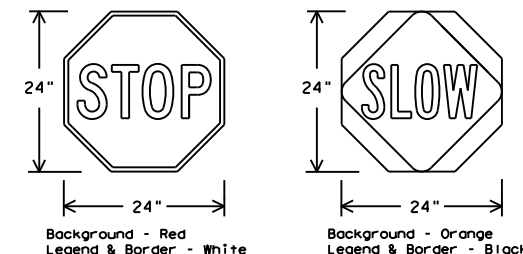

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.





BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	OW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0265	05	089	ETC	SH 71	ETC		
9-07	8-14	DIST		COUNTY		SHEET NO.			
7-13	5-21	AUS		BASTROP		28			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

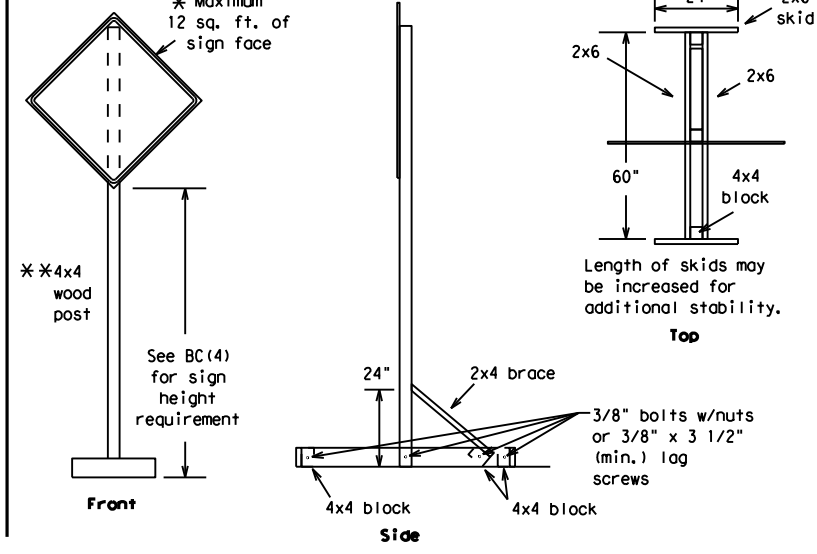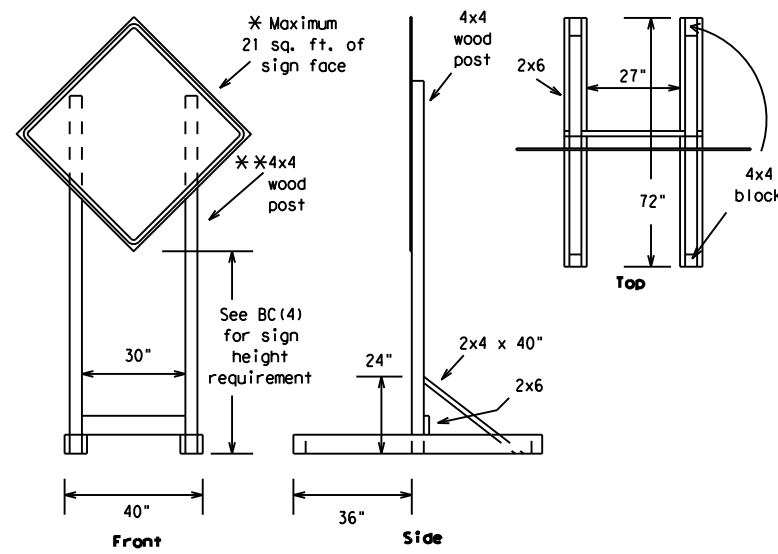



SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

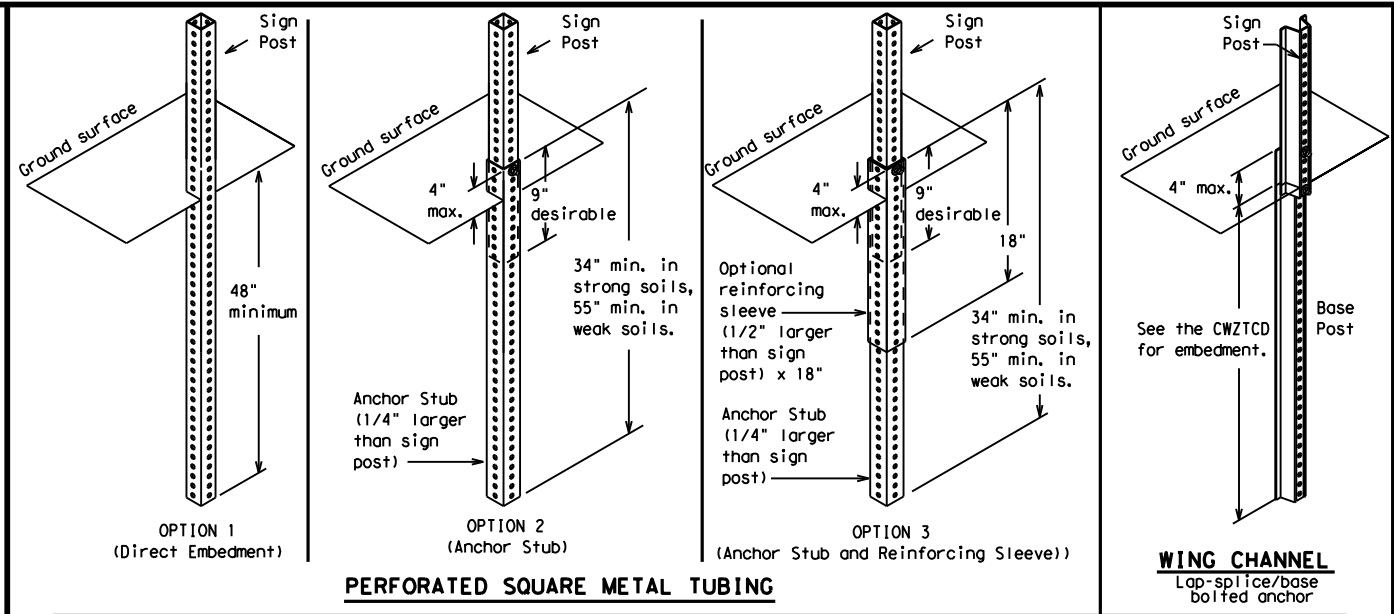

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

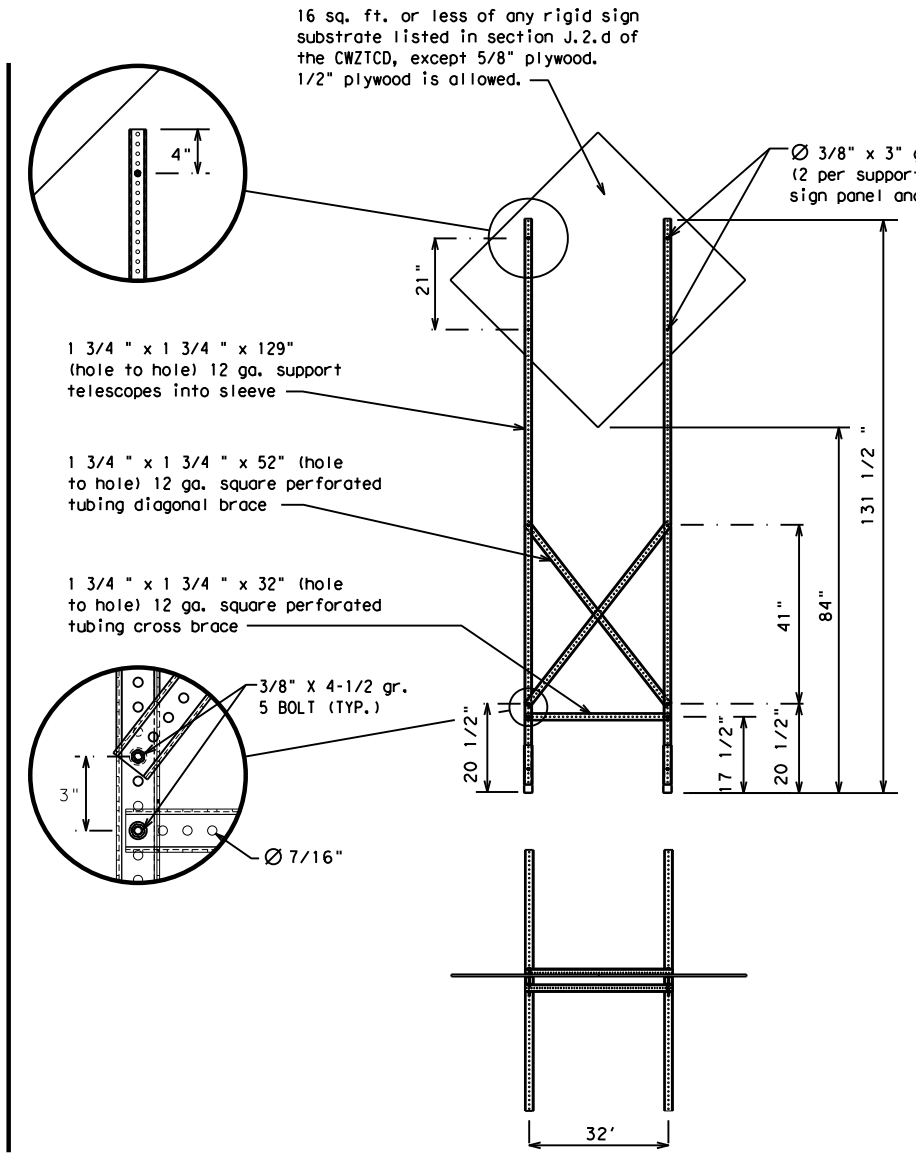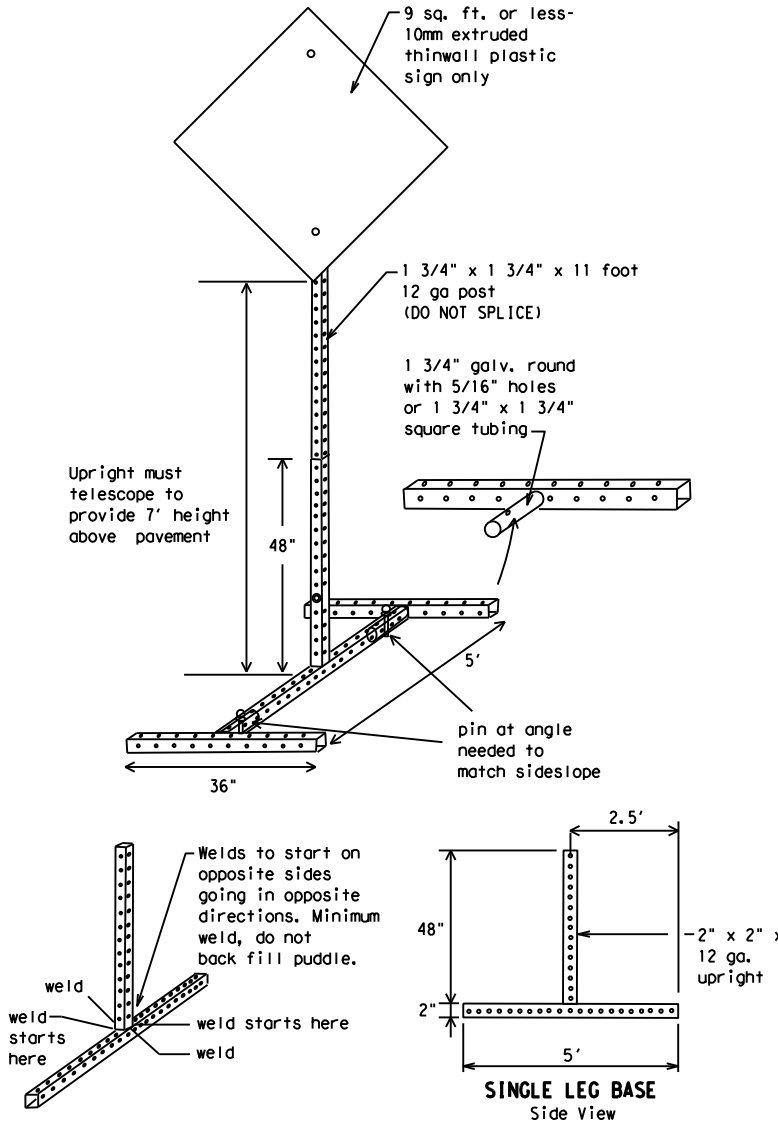

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
- No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
- When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- * See BC(4) for definition of "Work Duration."
- ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT:	SECT:	JOB:	089, ETC	SH:	71, ETC		
REVISIONS		0265	05						
9-07	8-14	DIST:	COUNTY:						
7-13	5-21	AUS:	BASTROP					SHEET NO. 29	

DATE:
FILE:

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI
ROADWORK XXX FT
FLAGGER XXXX FT
RIGHT LN NARROWS XXXX FT
MERGING TRAFFIC XXXX FT
LOOSE GRAVEL XXXX FT
DETOUR X MILE
ROADWORK PAST SH XXXX
BUMP XXXX FT
TRAFFIC SIGNAL XXXX FT
ROAD REPAIRS XXXX FT
LANE NARROWS XXXX FT
TWO-WAY TRAFFIC XX MILE
CONST TRAFFIC XXX FT
UNEVEN LANES XXXX FT
ROUGH ROAD XXXX FT
ROADWORK NEXT FRI-SUN
US XXX EXIT X MILES
LANES SHIFT *

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE *

FORM X LINES RIGHT
USE XXXXX RD EXIT
USE EXIT I-XX NORTH
USE I-XX E TO I-XX N
WATCH FOR TRUCKS
EXPECT DELAYS
PREPARE TO STOP
END SHOULDER USE
WATCH FOR WORKERS

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHS
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation # IH-number, US-number, SH-number, FM-number

Traffic Safety Division Standard


BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC (6) - 21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AUS	BASTROP	30	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

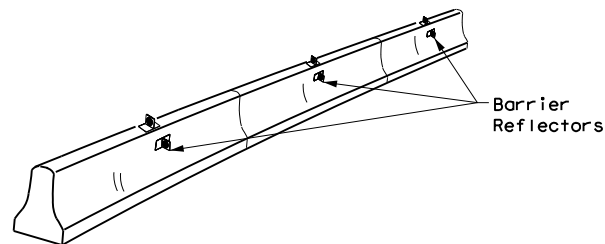


CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

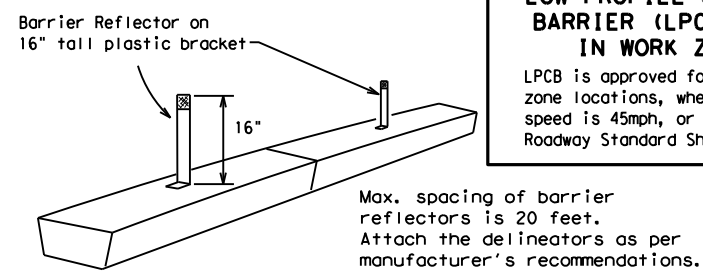

LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES
 LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

LOW PROFILE CONCRETE BARRIER (LPCB)

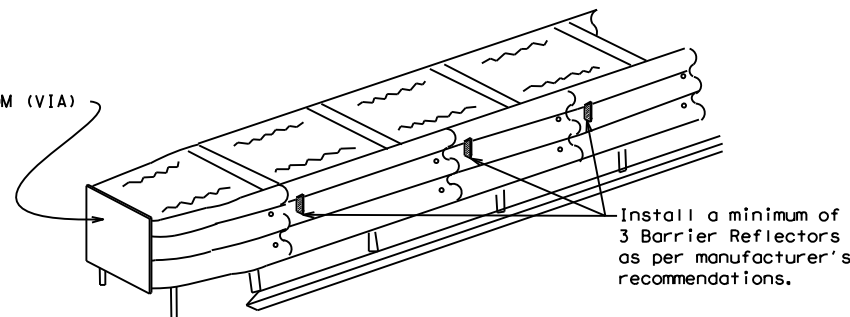

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES
 End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.



Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.




Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

DATE:
FILE:

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

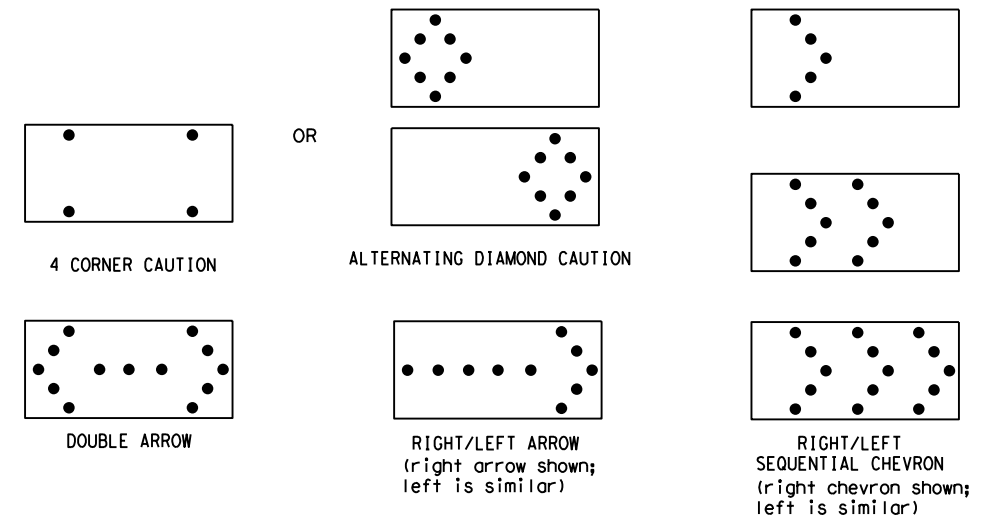

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.

Texas Department of Transportation
 Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC (7) -21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB		HIGHWAY			
REVISIONS		0265	05	089, ETC		SH 71, ETC			
9-07	8-14	DIST		COUNTY		SHEET NO.			
7-13	5-21	AUS		BASTROP		31			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:


- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.


BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

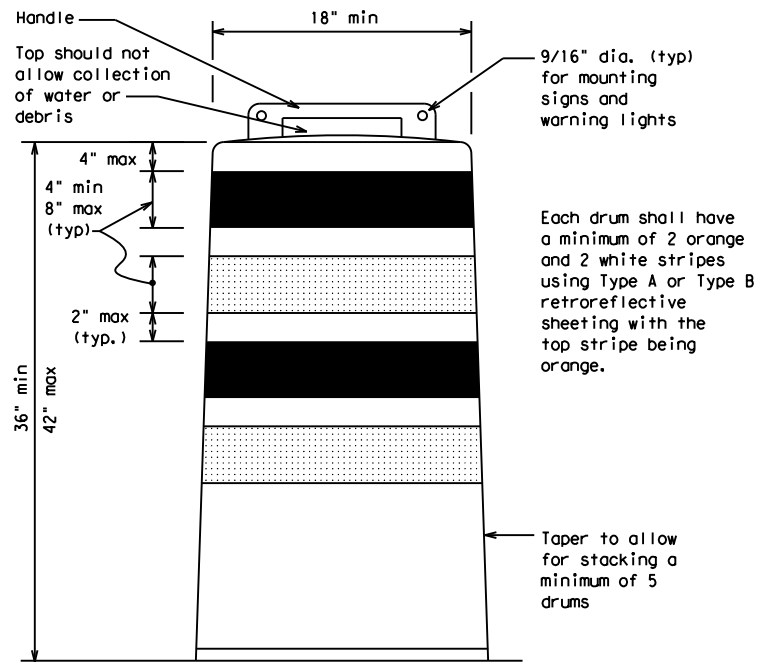


Each drum shall have a minimum of 2 orange and 2 white stripes using Type A or Type B retroreflective sheeting with the top stripe being orange.

Taper to allow for stacking a minimum of 5 drums




This detail is not intended for fabrication. See note 3 and the CWZTCD list for providers of approved Detectable Pedestrian Barricades

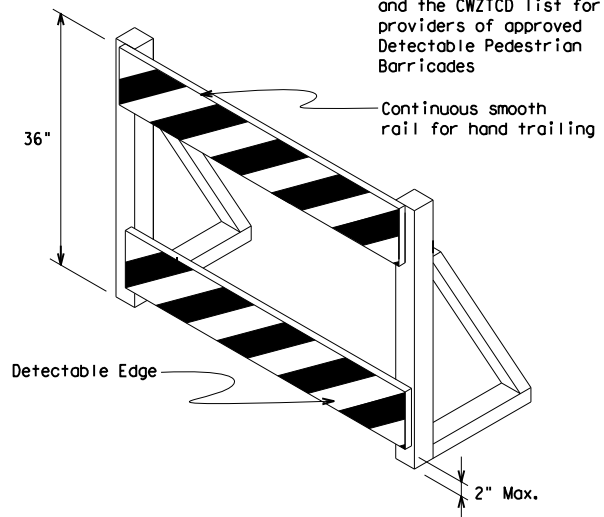


DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign (Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel
mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0265	05	089, ETC		SH 71, ETC			
4-03	8-14	DIST		COUNTY		SHEET NO.			
9-07	5-21	AUS		BASTROP		32			
7-13									

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

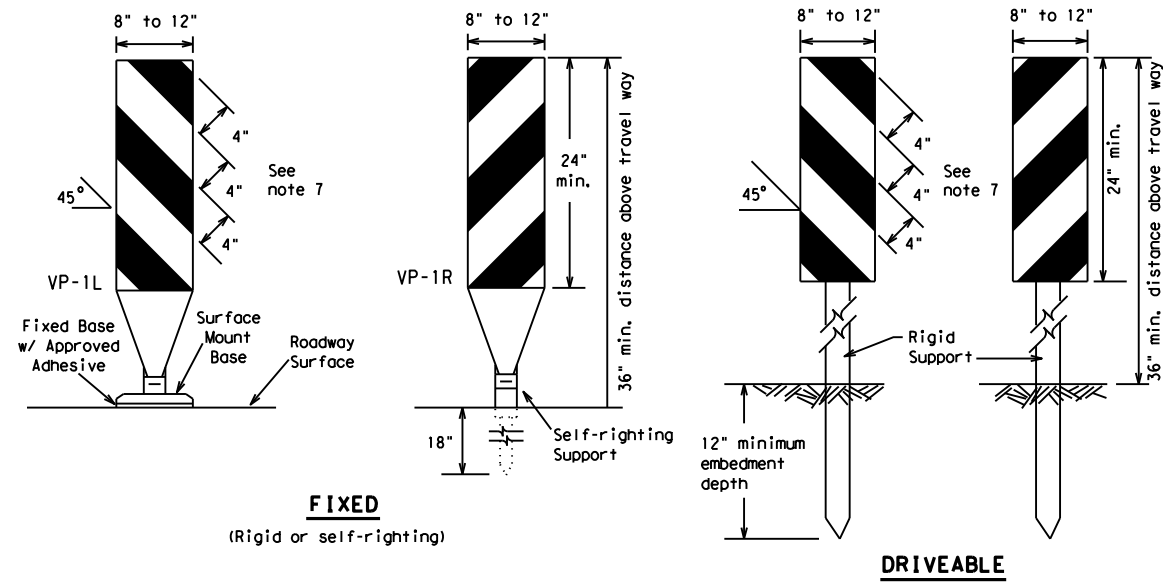

FIXED
(Rigid or self-righting)


DRIVEABLE

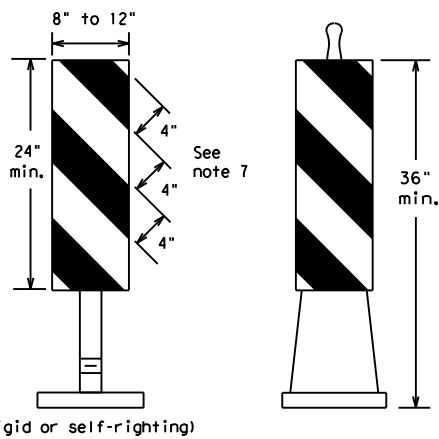

PORTABLE


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane. VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

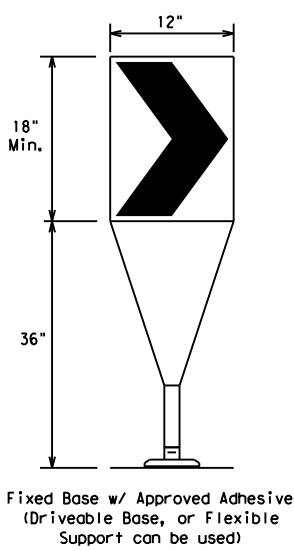

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS



LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long cones and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths * X			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

*X Taper lengths have been rounded off.
L=Length of Taper (FT.) W=Width of Offset (FT.)
S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (9) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DR: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AUS	BASTROP	33	


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

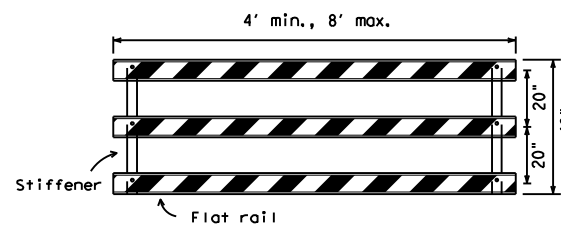


TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

Each roadway of a divided highway shall be barricaded in the same manner.

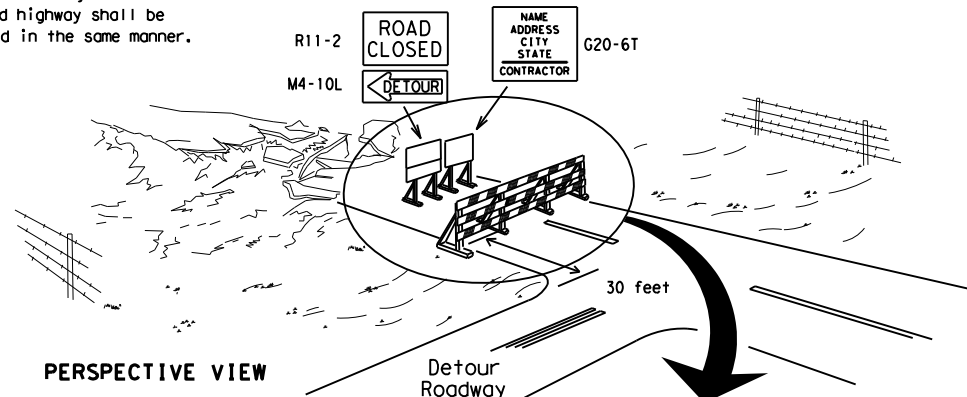

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

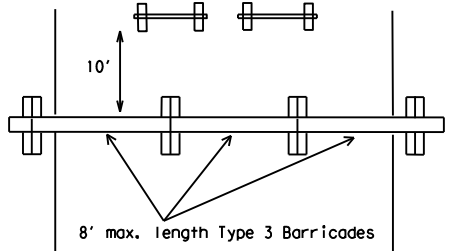


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

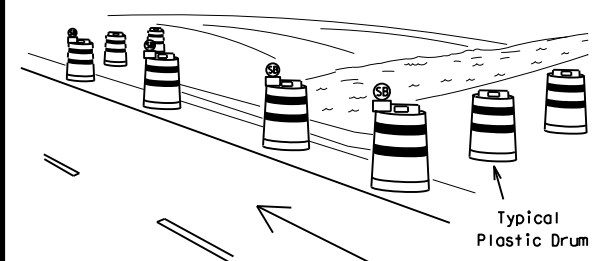

PERSPECTIVE VIEW

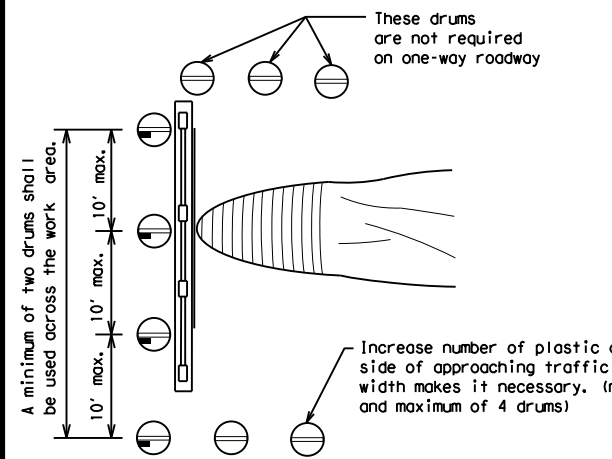


PLAN VIEW

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

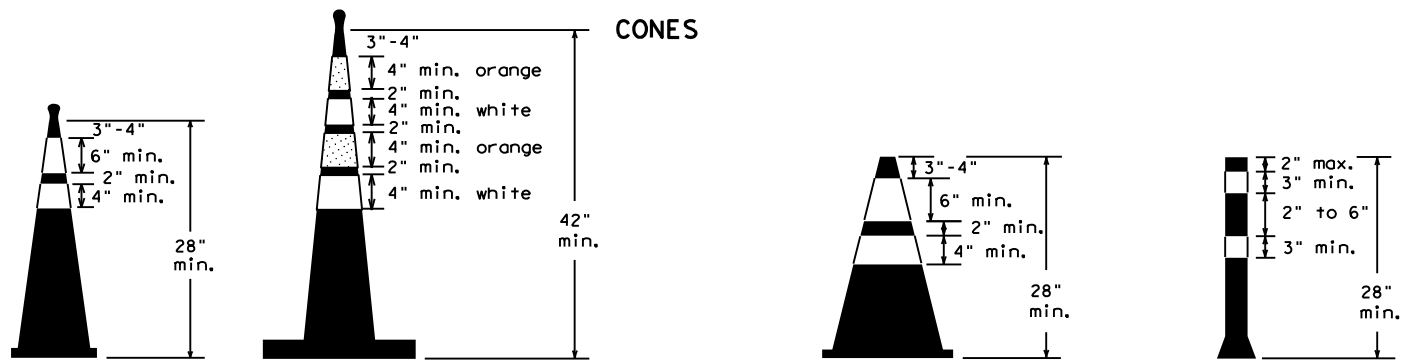


Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

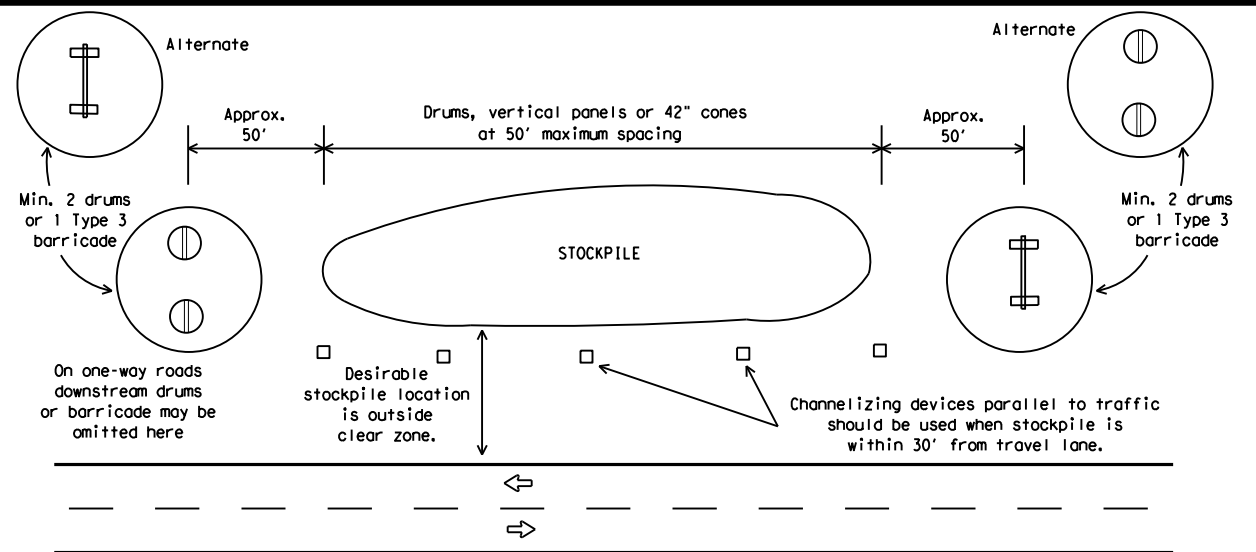

TRAFFIC CONTROL FOR MATERIAL STOCKPILES

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined in BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.

Texas Department of Transportation
Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (10) -21

FILE# bc-21.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AUS	BASTROP	34	

DATE: FILE:

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

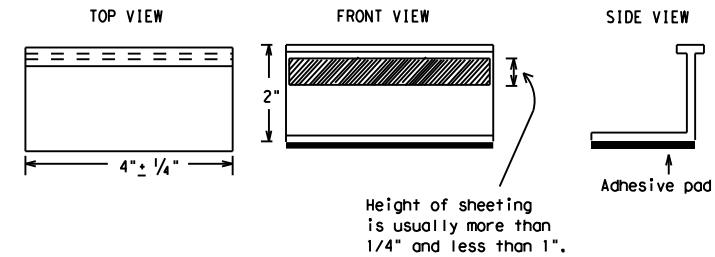

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

SHEET 11 OF 12







BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
2-98 9-07 5-21	0265	05	089, ETC	SH 71, ETC
1-02 7-13	DIST	COUNTY	SHEET NO.	
11-02 8-14	AUS	BASTROP	35	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

PAVEMENT MARKING PATTERNS

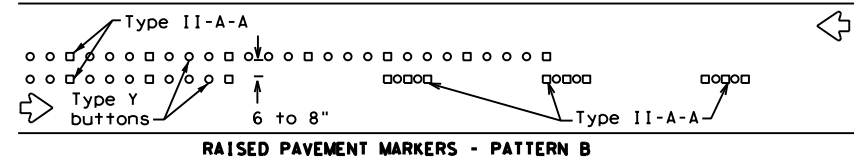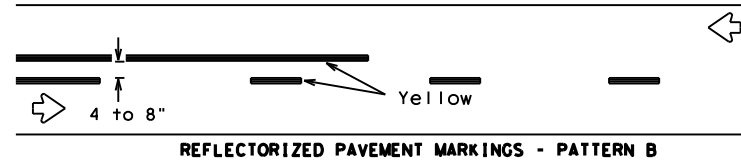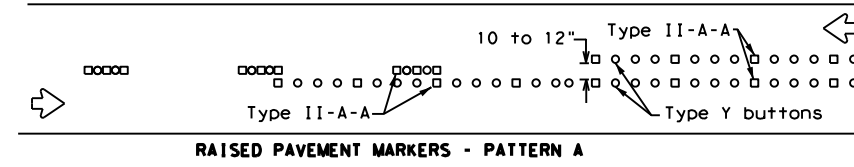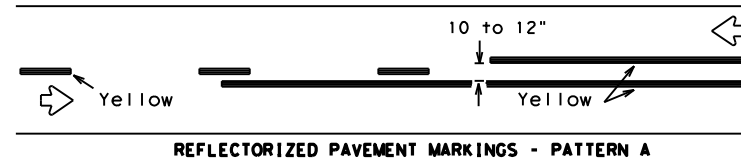



Pattern A is the TxDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

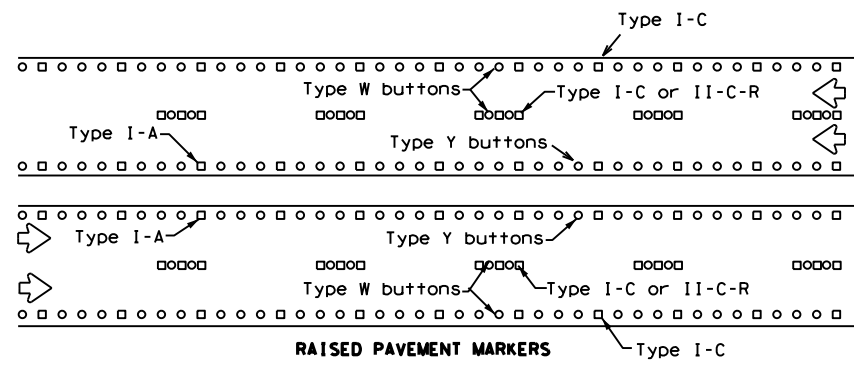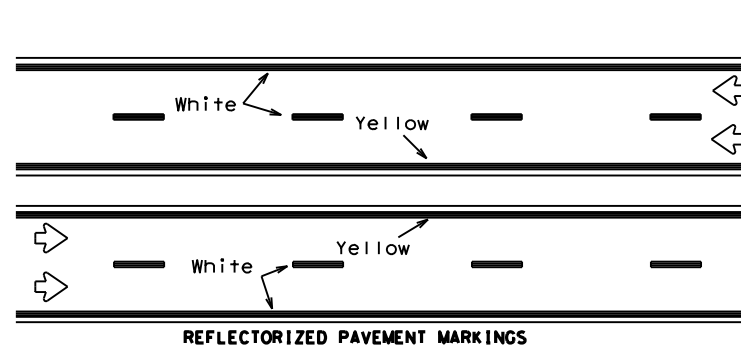



Prefabricated markings may be substituted for reflectorized pavement markings.

EDGE & LANE LINES FOR DIVIDED HIGHWAY

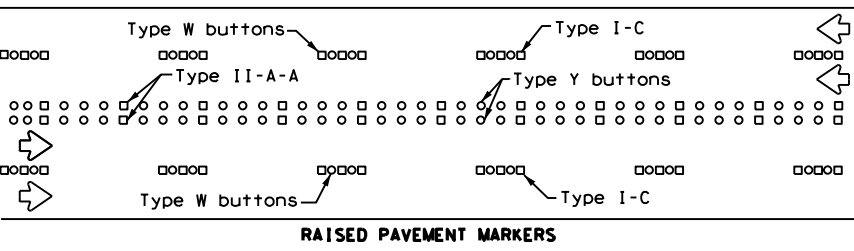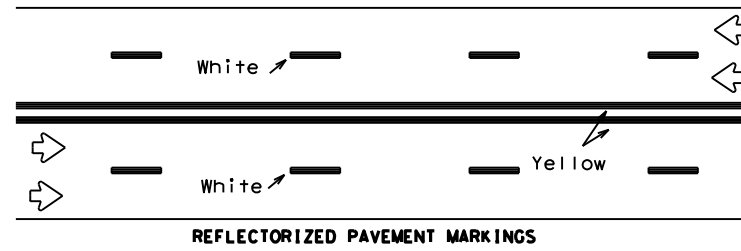

Prefabricated markings may be substituted for reflectorized pavement markings.





LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

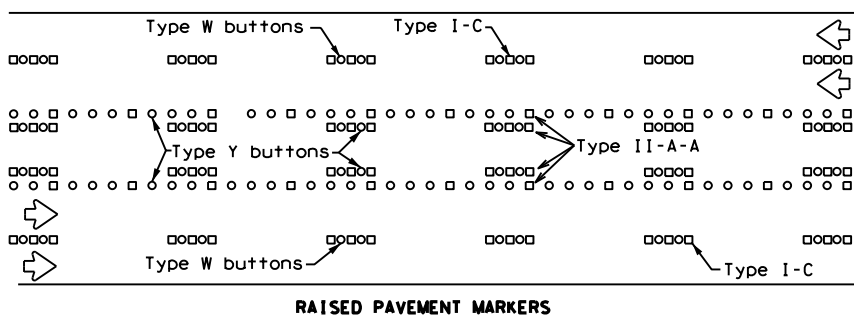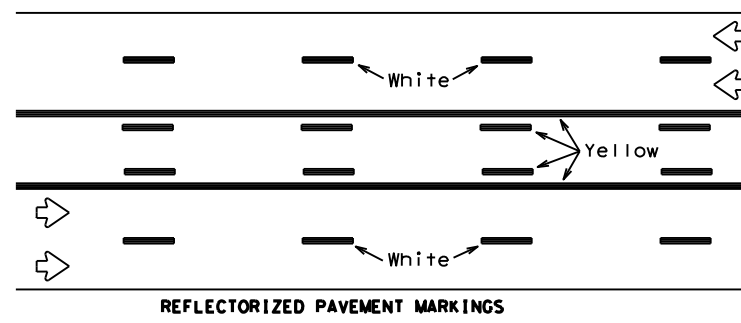

Prefabricated markings may be substituted for reflectorized pavement markings.

TWO-WAY LEFT TURN LANE

STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

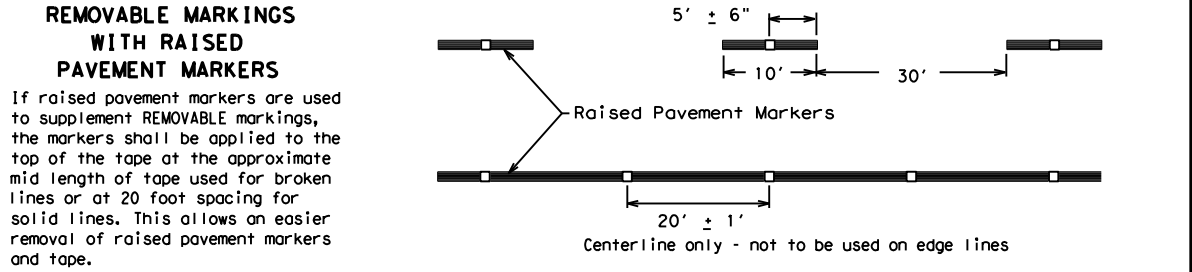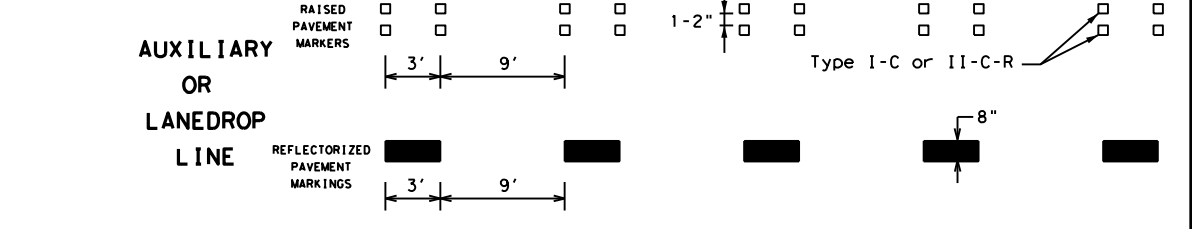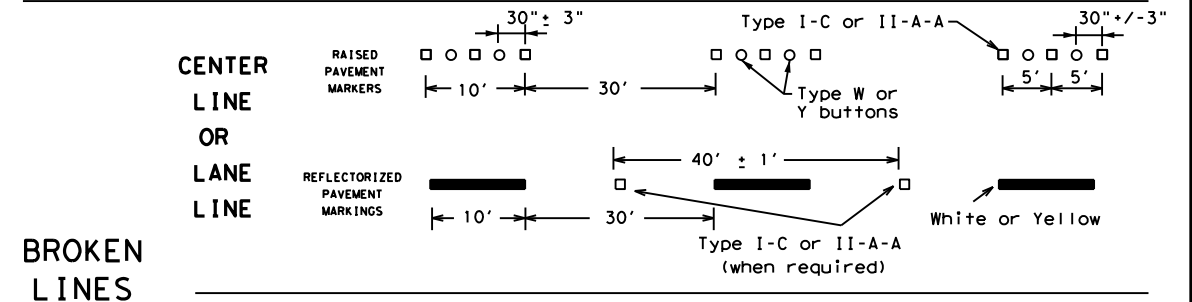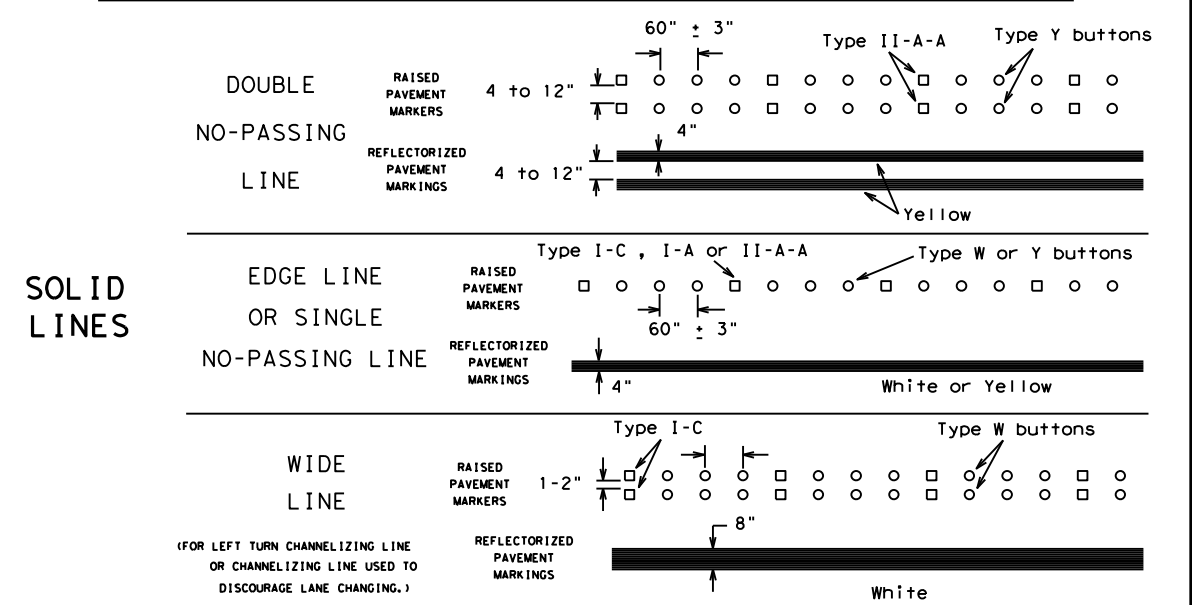

SHEET 12 OF 12

Texas Department of Transportation
Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC (12) - 21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	AUS	BASTROP	36	
11-02 8-14				

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

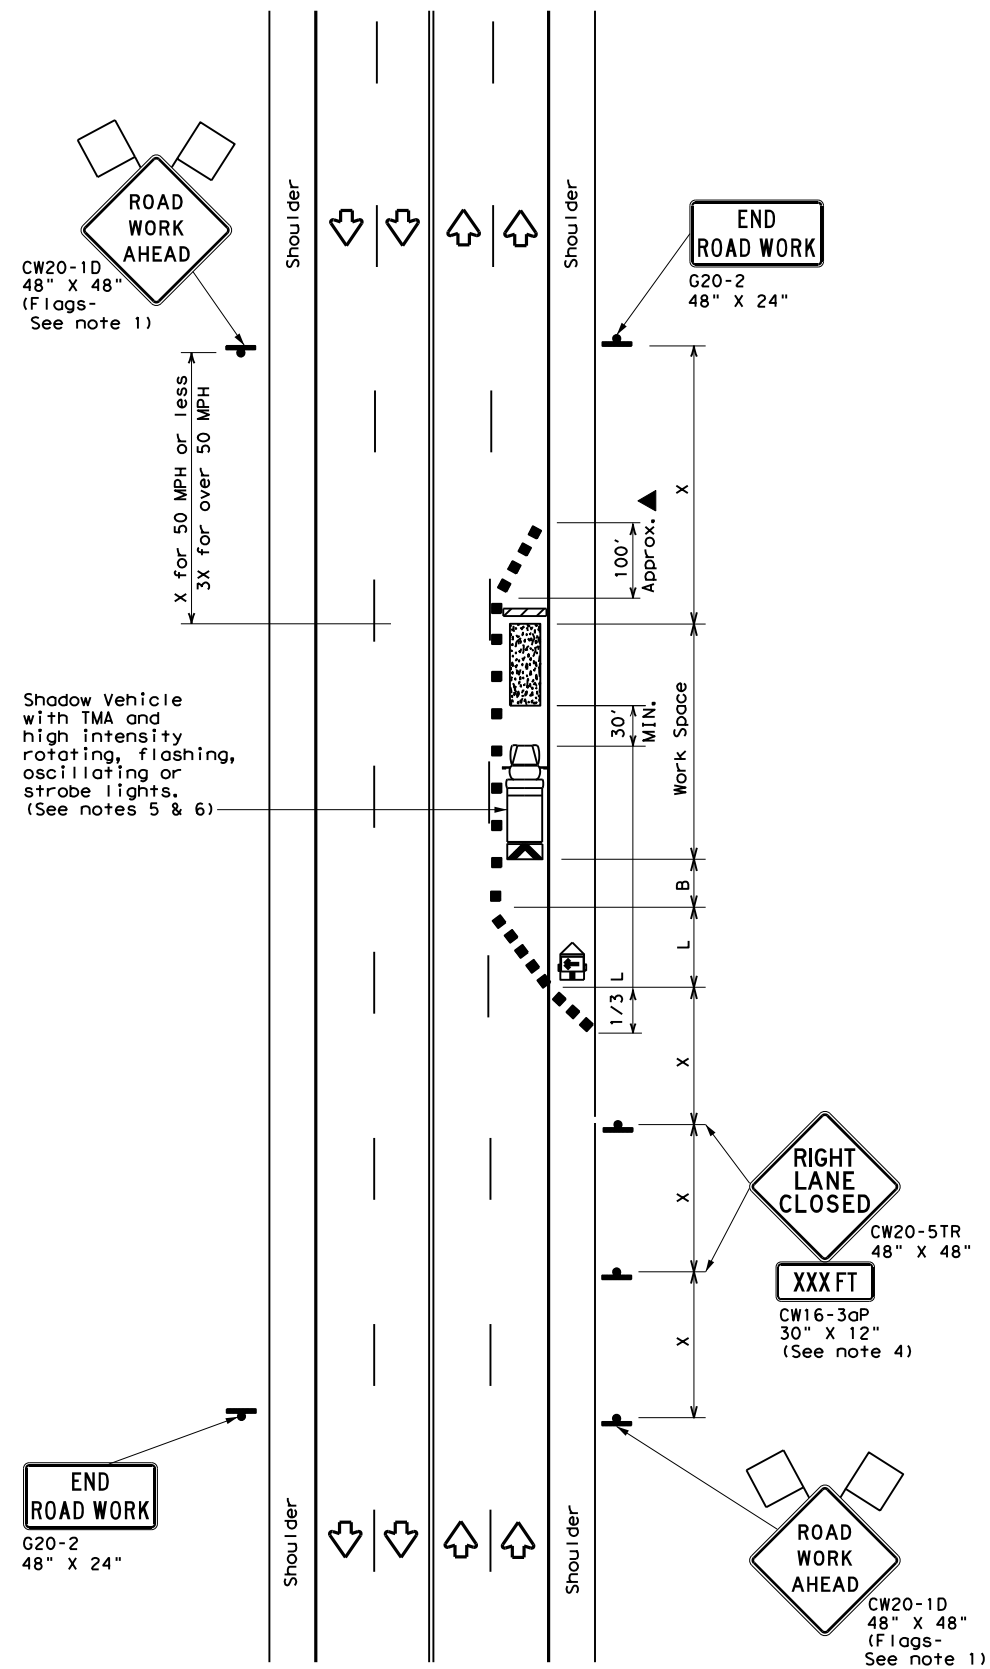

TCP (2-4a)
ONE LANE CLOSED

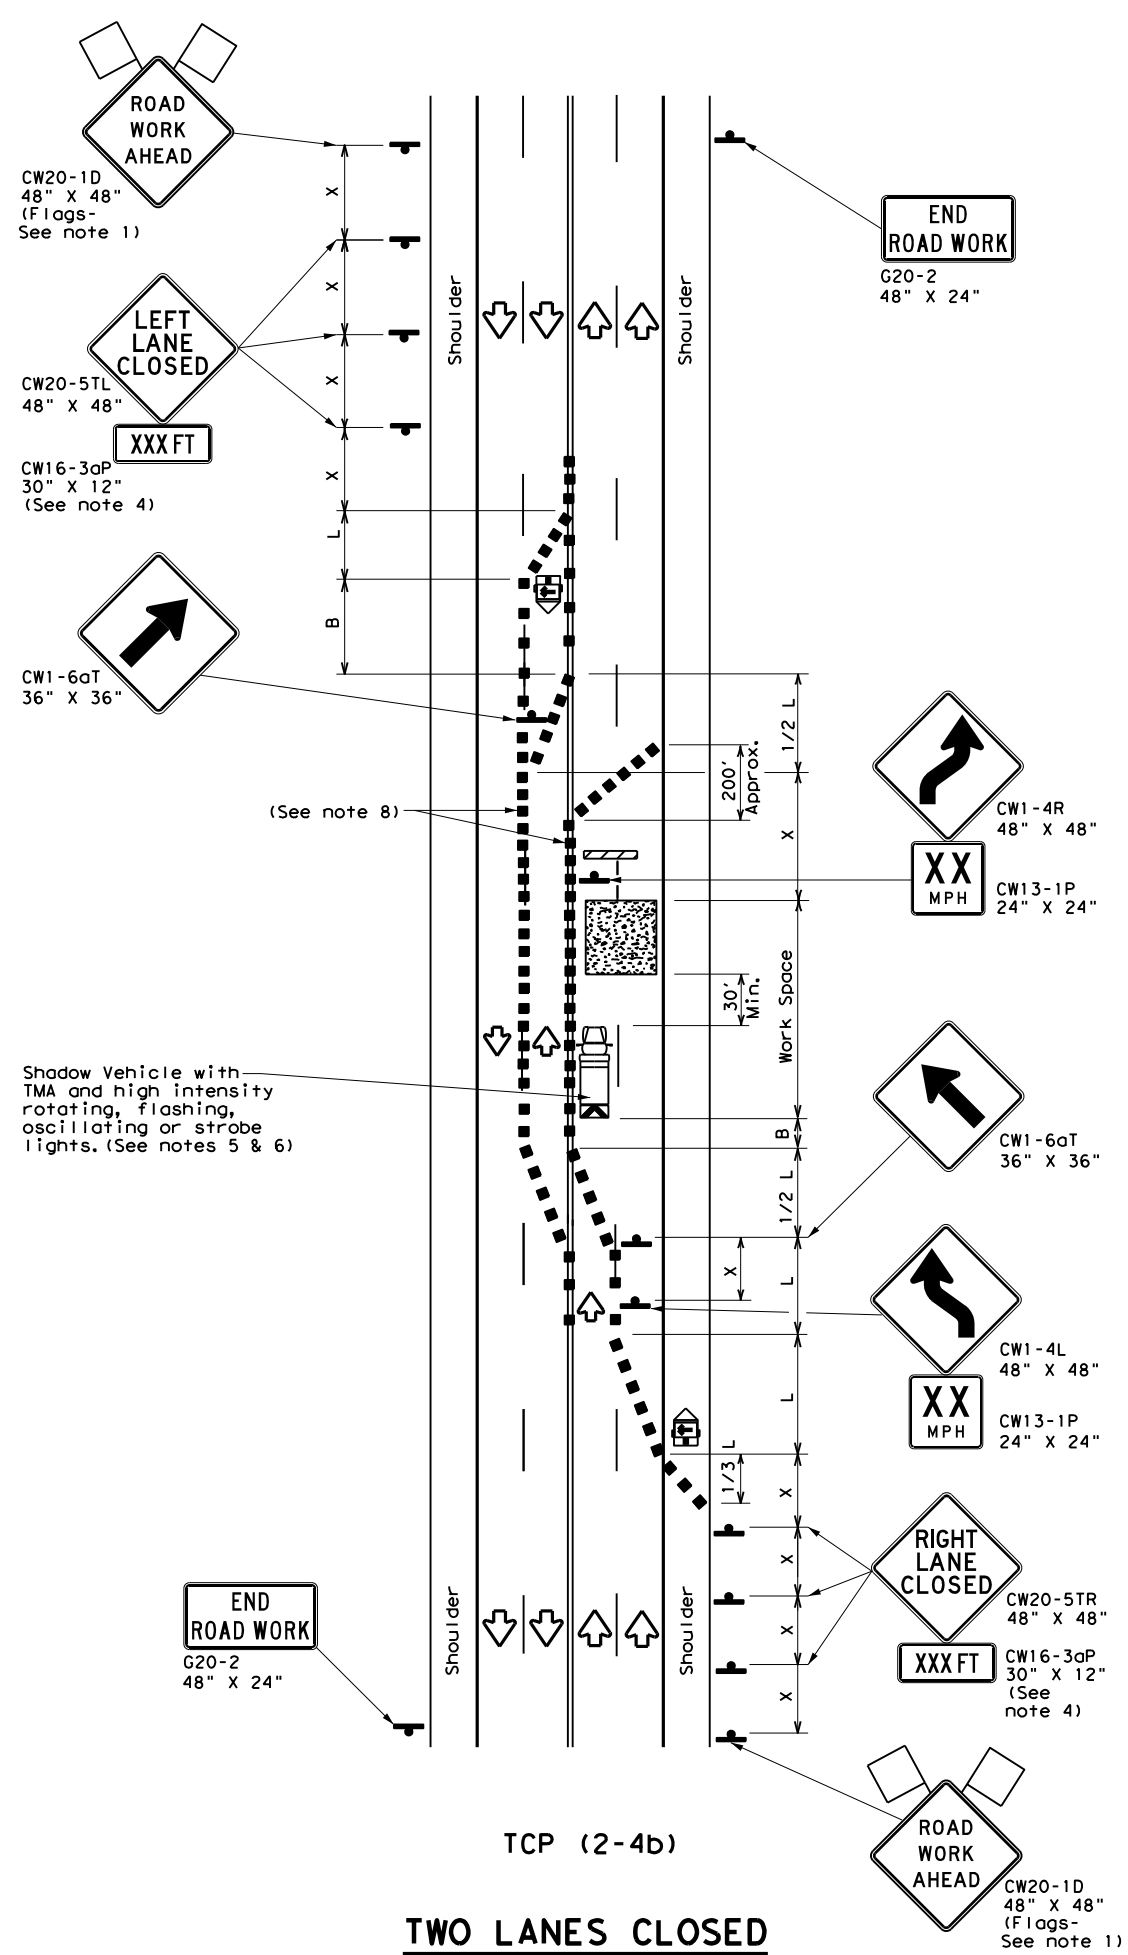

TCP (2-4b)
TWO LANES CLOSED

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		✓	✓	

GENERAL NOTES

- Flags attached to signs where shown, are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- The downstream taper is optional. When used, it should be 100 feet minimum length per lane.
- For short term applications, when post mounted signs are not used, the distance legend may be shown on the sign face rather than on a CW16-3aP supplemental plaque.
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

TCP (2-4a)

- If this TCP is used for a left lane closure, CW20-5TL "LEFT LANE CLOSED" signs shall be used and channelizing devices shall be placed on the centerline to protect the work space from opposing traffic with the arrow board placed in the closed lane near the end of the merging taper.

TCP (2-4b)

- For shorter durations where traffic is directed over a yellow centerline, channelizing devices which separate two-way traffic should be spaced on tapers at 20' or 15' if posted speeds are 35 mph or slower, and for tangent sections, at 1/2(S) where S is the speed in mph. This tighter devices spacing is intended for the area of conflicting markings, not the entire work zone.






**TRAFFIC CONTROL PLAN
LANE CLOSURES ON MULTILANE
CONVENTIONAL ROADS**

TCP (2-4) - 18

FILE: tcp2-4-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
8-95 3-03	DIST	COUNTY	SHEET NO.	
1-97 2-12	AUS	BASTROP	37	
4-98 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

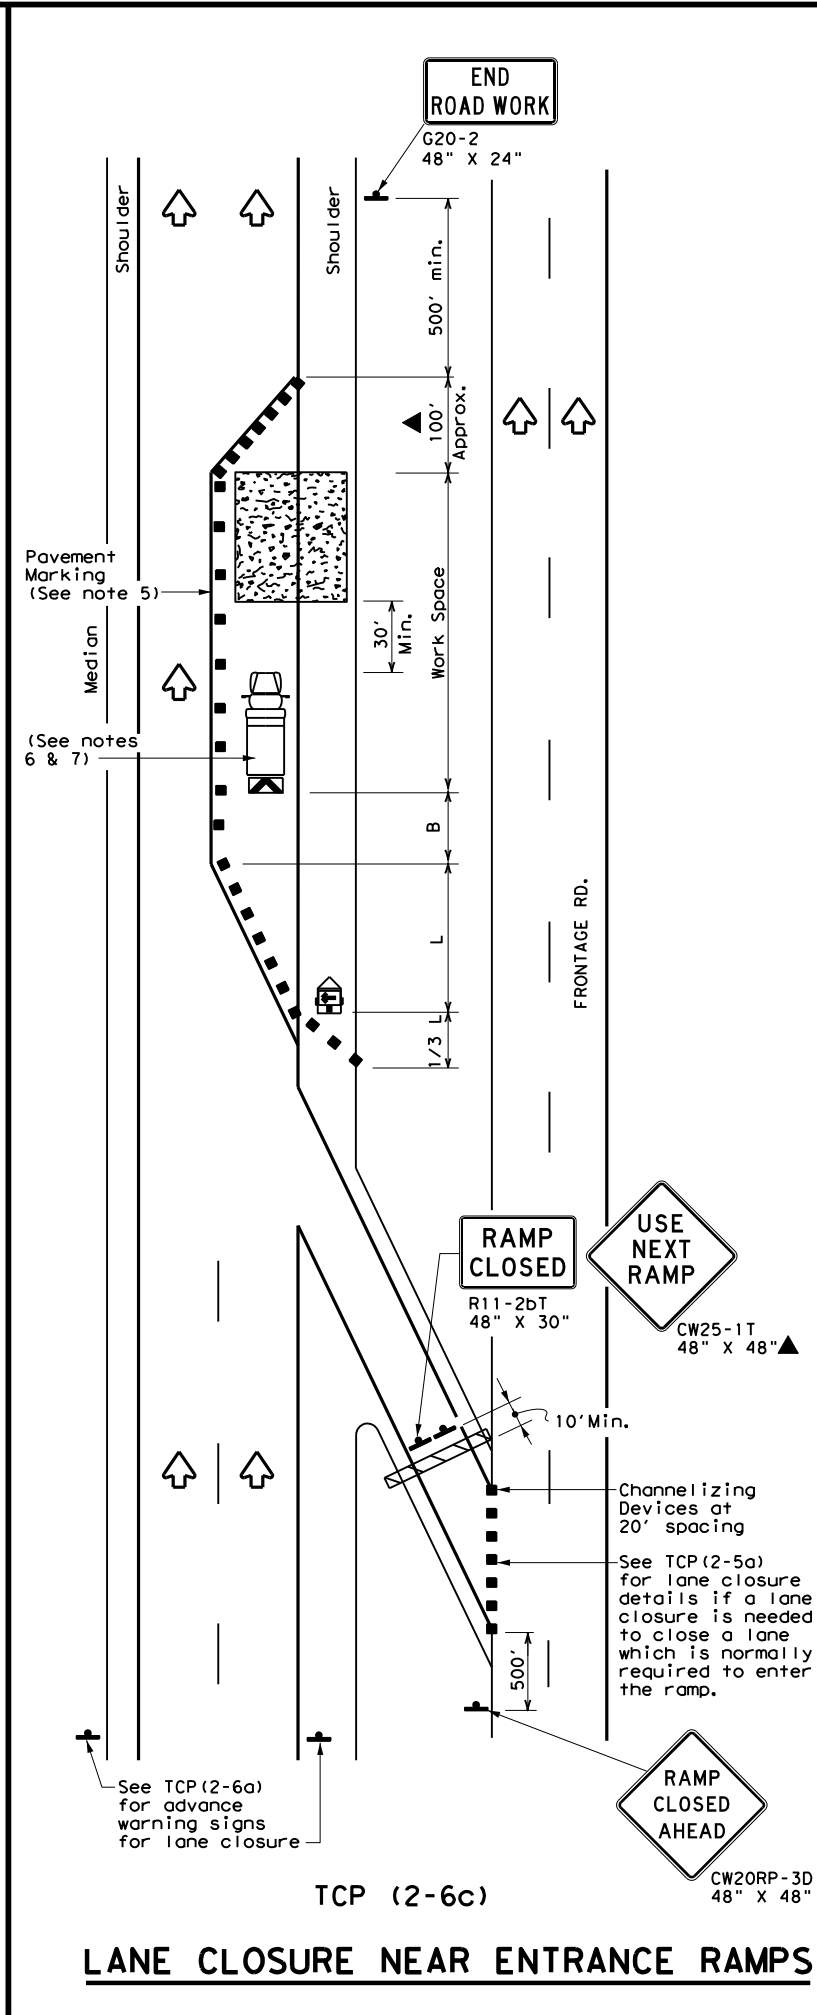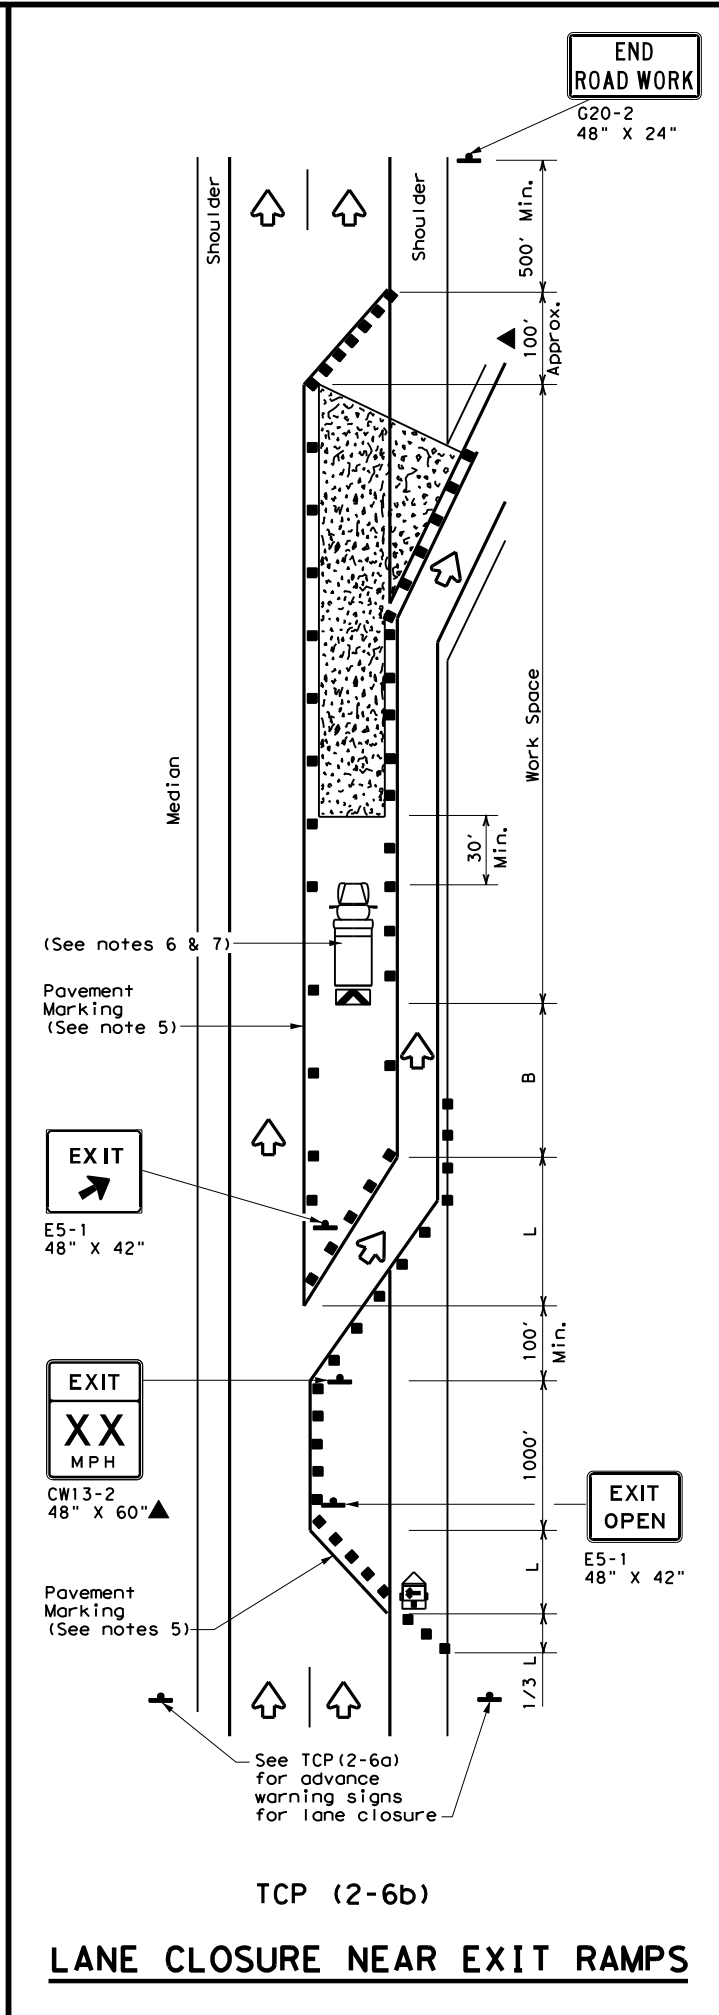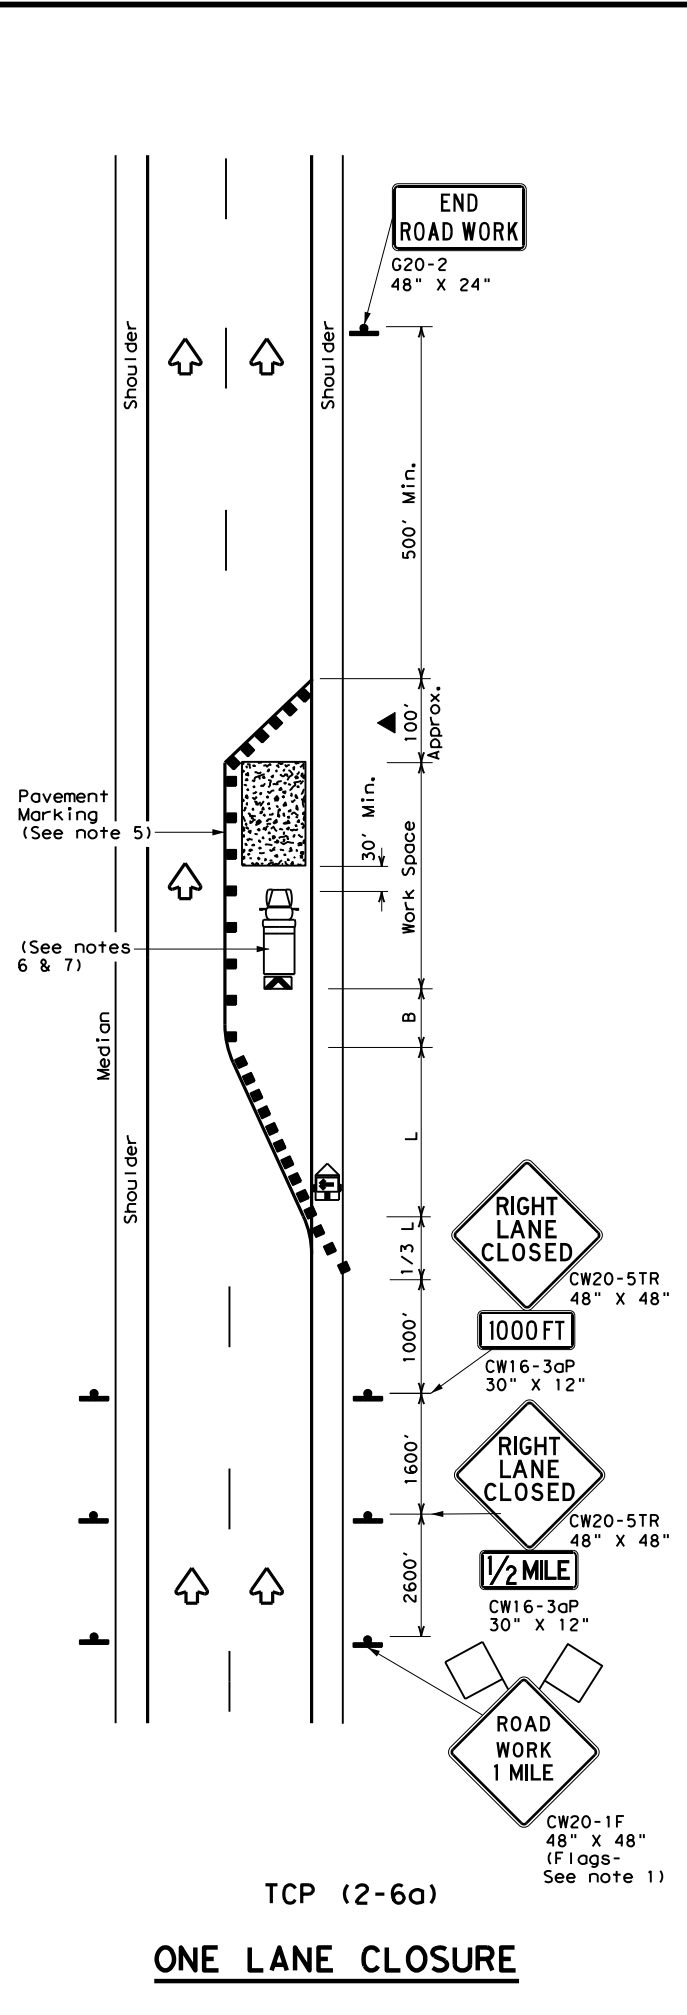

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
			✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
 - Channelizing devices used along the work space or along tangent sections may be supplemented with vertical panels (VP) placed on every other channelizing device. If night time conditions make it difficult to see at least two VPs, the VPs may be placed on each channelizing device.
 - The placement of pavement markings may be omitted on intermediate-term stationary work zones with the approval of the Engineer.
 - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

Texas Department of Transportation
 Traffic Operations Division Standard


TRAFFIC CONTROL PLAN LANE CLOSURES ON DIVIDED HIGHWAYS

TCP (2-6) - 18


FILE: tcp2-6-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	AUS	BASTROP	38	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

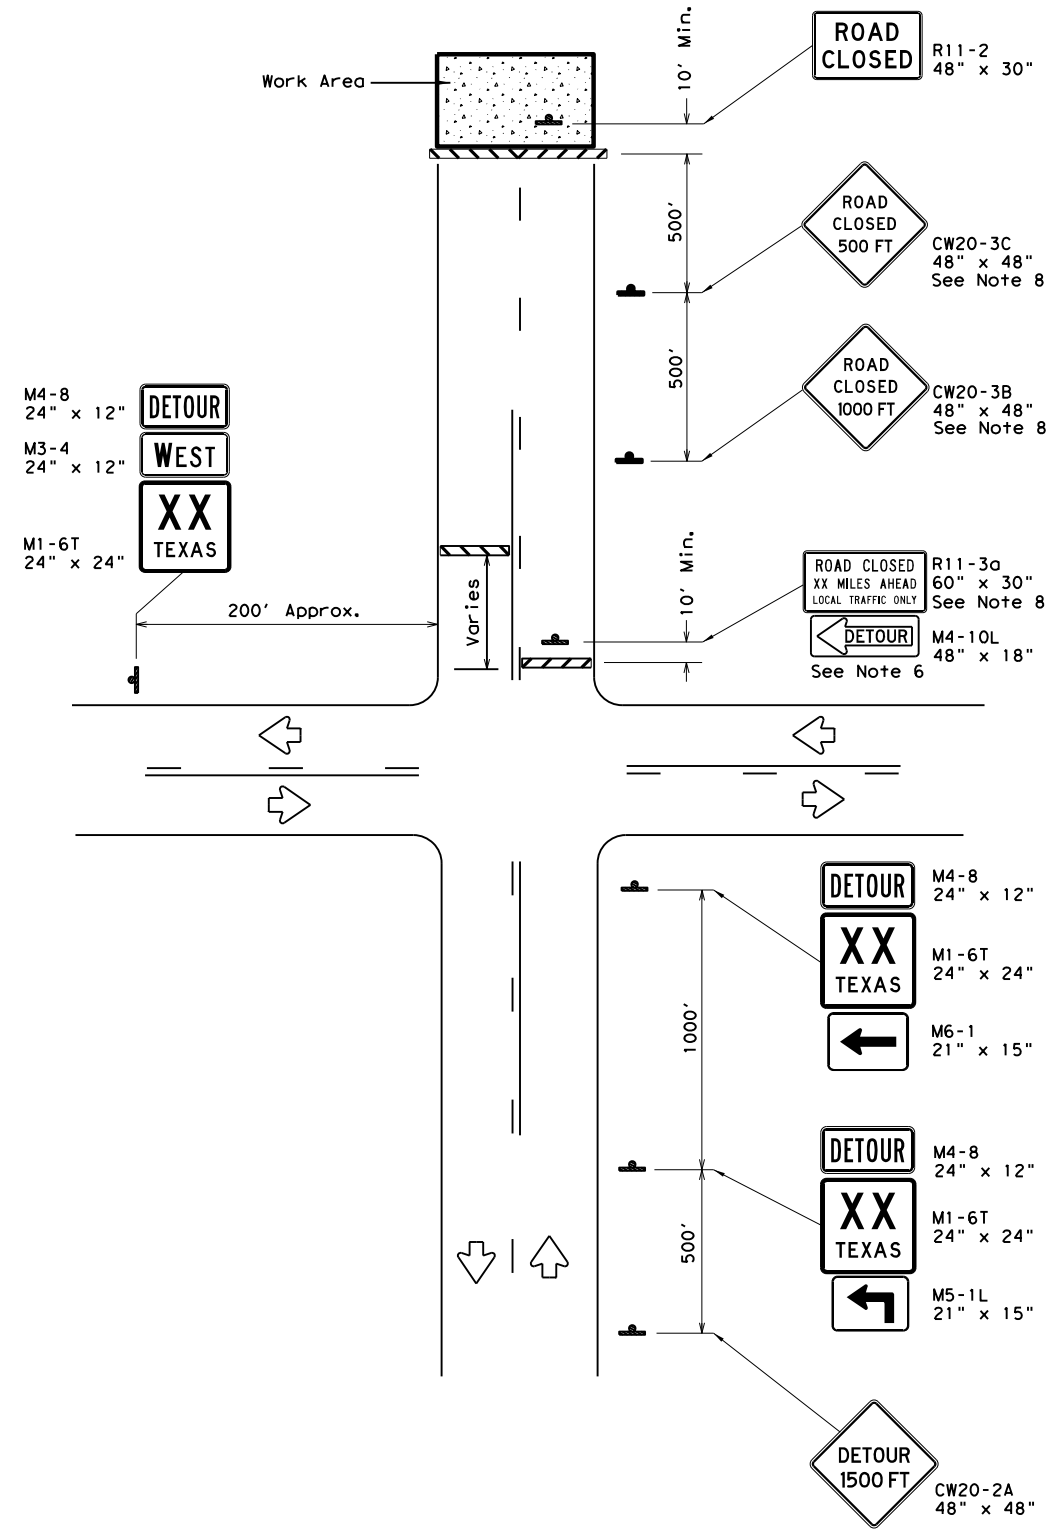

ROAD CLOSURE BEYOND THE INTERSECTION
Signing for a Numbered Route with an Off-Site Detour

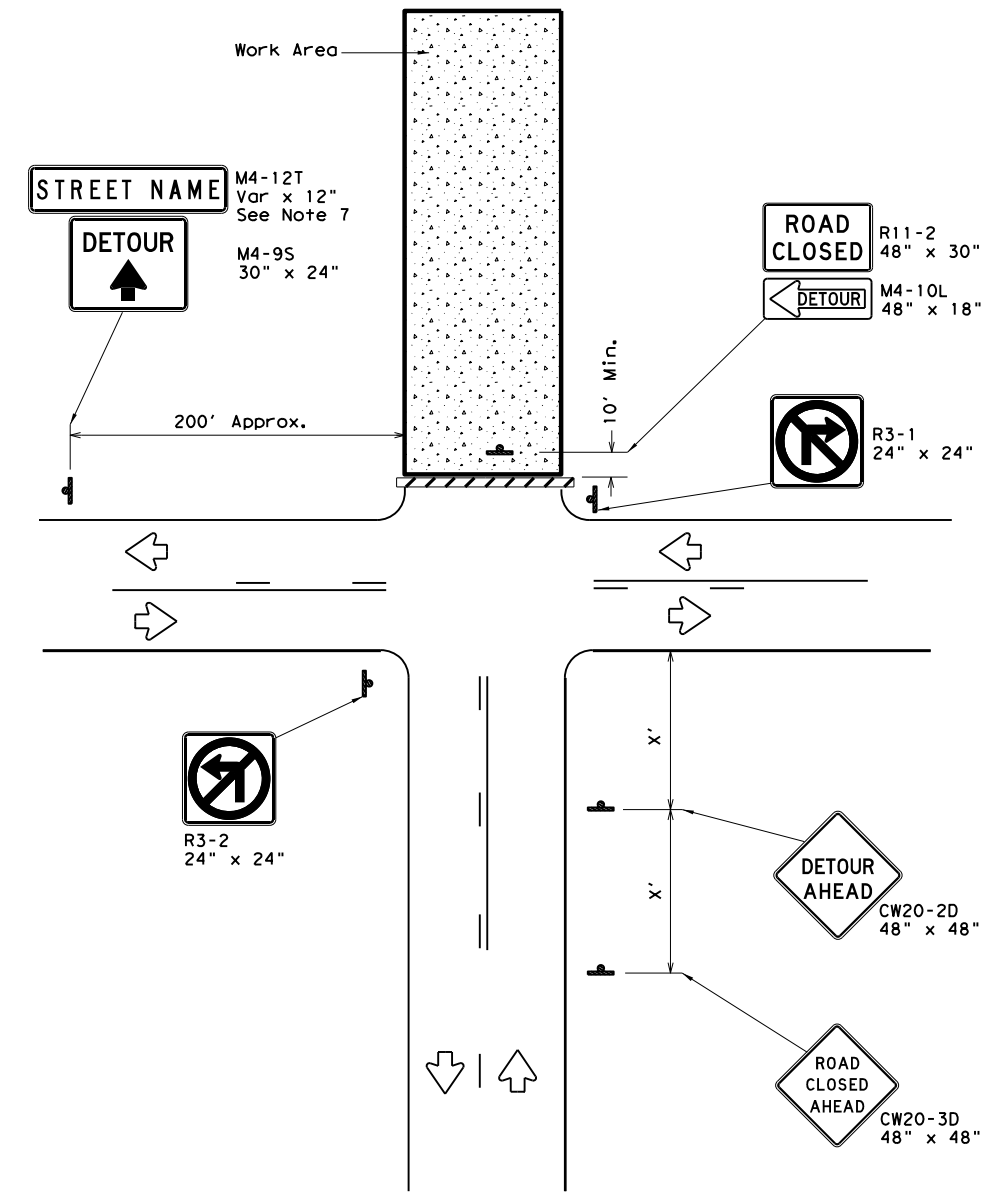

ROAD CLOSURE AT THE INTERSECTION
Signing for an Un-numbered Route with an Off-Site Detour

LEGEND	
	Type 3 Barricade
	Sign

Posted Speed *	Minimum Sign Spacing "x" Distance
30	120'
35	160'
40	240'
45	320'
50	400'
55	500'
60	600'
65	700'
70	800'
75	900'

* Conventional Roads Only

GENERAL NOTES

1. This sheet is intended to provide details for temporary work zone road closures. For permanent road closure details see the D&OM standards.
2. Barricades used shall meet the requirements shown on Barricade and Construction Standard BC(10) and listed on the Compliant Work Zone Traffic Control Devices list (CWZTCD).
3. Stockpiled materials shall not be placed on the traffic side of barricades.
4. Barricades at the road closure should extend from pavement edge to pavement edge.
5. Detour signing shown is intended to illustrate the type of signing that is appropriate for numbered routes or un-numbered routes as labeled. It does not indicate the full extent of detour signing required. Detour routes should be signed as shown elsewhere in the plans.
6. If the road is open for a significant distance beyond the intersection or there are significant origin/destination points beyond the intersection, the signs and barricades at this location should be located at the edge of the traveled way.
7. The Street Name (M4-12T) sign is to be placed above the DETOUR (M4-9S) sign.
8. For urban areas where there is a shorter distance between the intersection and the actual closure location, the ROAD CLOSED XX MILES AHEAD (R11-3a) sign may be replaced with a ROAD CLOSED TO THRU TRAFFIC (R11-4) sign. If adequate space does not exist between the intersection and the closure a single ROAD CLOSED AHEAD (CW20-3D) sign spaced as per the table above may replace the ROAD CLOSED 1000 FT (CW20-3B) and ROAD CLOSED 500 FT (CW20-3C) signs.
9. Signs and barricades shown shall be subsidiary to Item 502. Locations where these details will be required shall be as shown elsewhere in the plans.

WORK ZONE ROAD CLOSURE DETAILS

WZ (RCD) - 13

FILE: wzrcd-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 1995	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
1-97 4-98 7-13	DIST	COUNTY	SHEET NO.	
2-98 3-03	AUS	BASTROP	39	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


Warning sign and rumble strip sequence in opposite direction is same as below.

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

Rumble Strip Array (See note 1)


Rumble Strip Array (See note 1)

The second Rumble Strip Array is required when the ADT thresholds in Table 1 indicate the need for 2 Arrays.

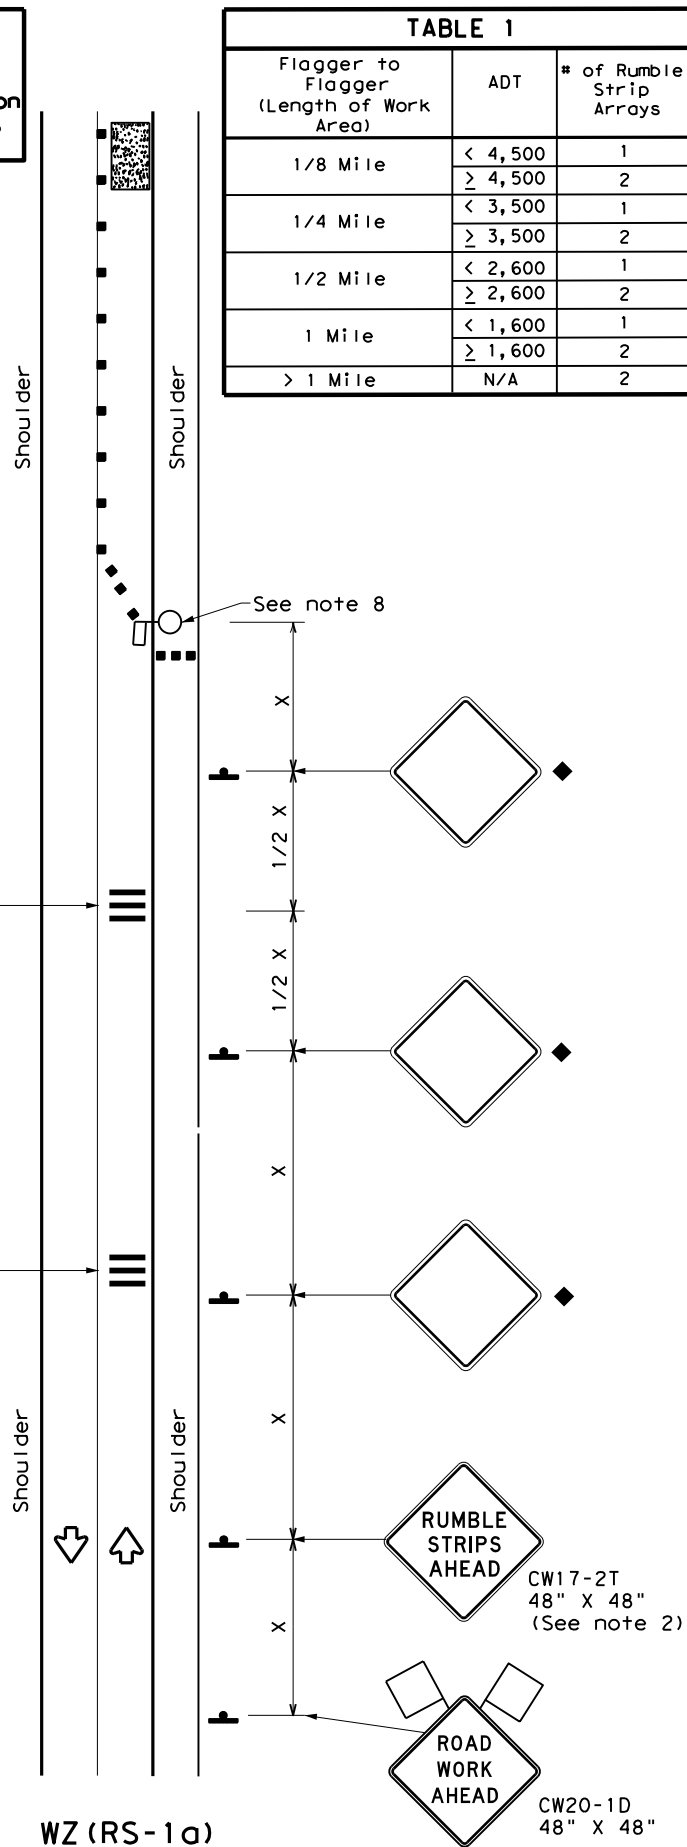

WZ (RS-1a)

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

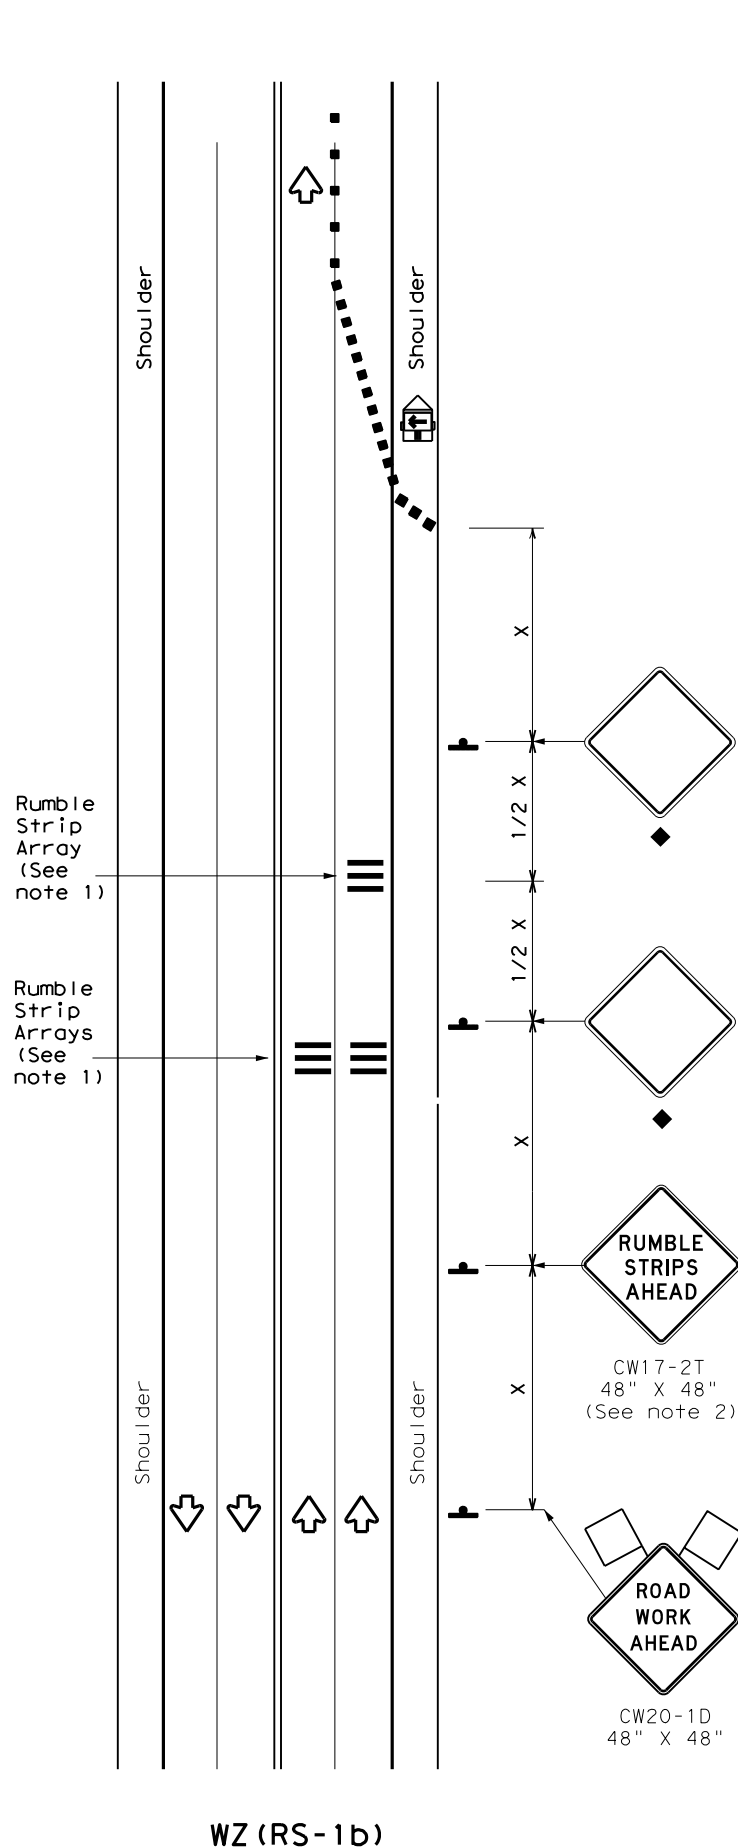

WZ (RS-1b)

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35' +

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS/2 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT)
 S=Posted Speed (MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.

* For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

Texas Department of Transportation Traffic Safety Division Standard

TEMPORARY RUMBLE STRIPS


WZ (RS) - 22

FILE: wzrs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2012	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
2-14 1-22	DIST	COUNTY	SHEET NO.	
4-16	AUS	BASTROP	40	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS

SOLID LINES

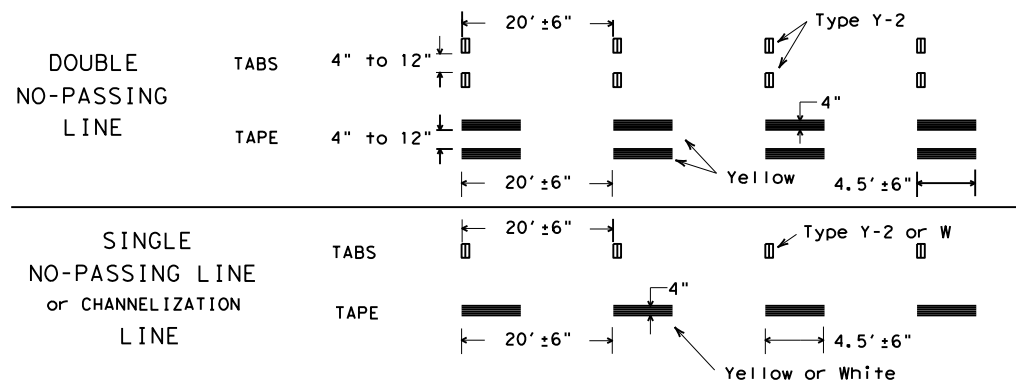


BROKEN LINES

(FOR CENTER LINE OR LANE LINE)

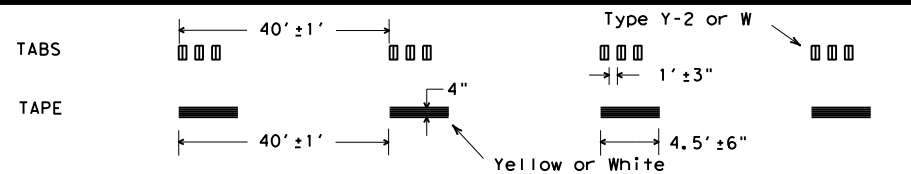


WIDE DOTTED LINES

(FOR LANE DROP LINES)

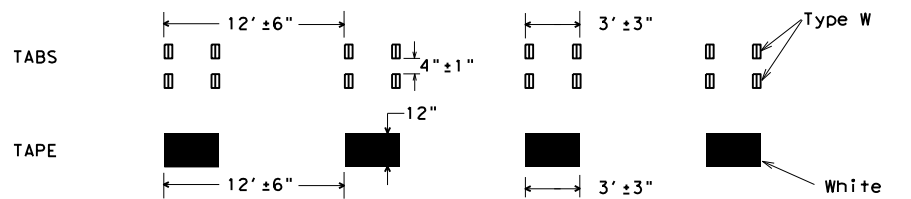

WIDE GORE MARKINGS

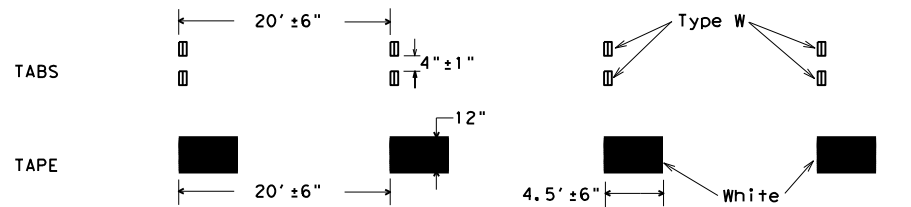

NOTES:


- Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexible-reflective roadway marker tabs unless otherwise specified elsewhere in plans.
- Short term pavement markings shall NOT be used to simulate edge lines.
- Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones for up to 14 calendar days. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.

TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)


- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

DATE:
FILE:


WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

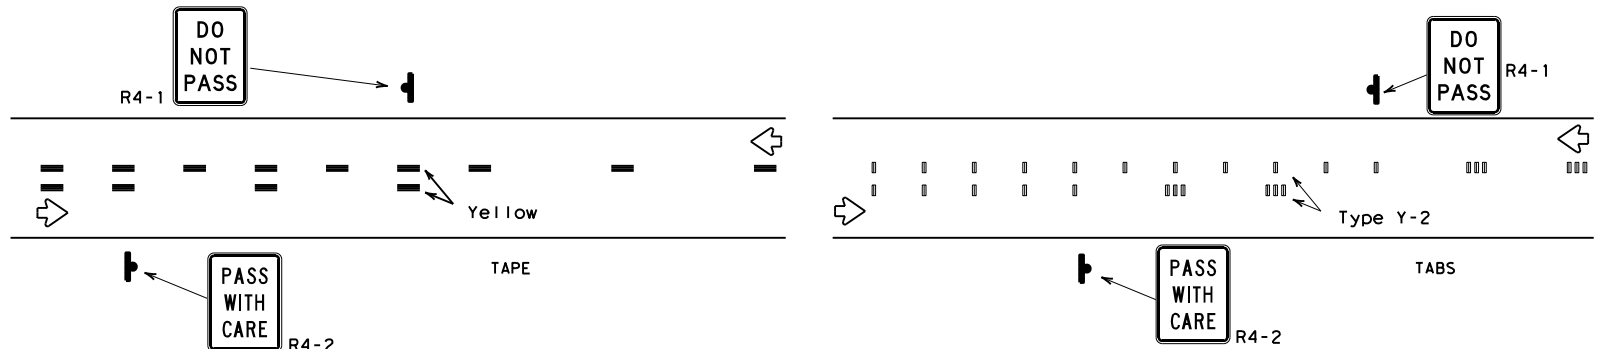


CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO LANE TWO-WAY HIGHWAYS

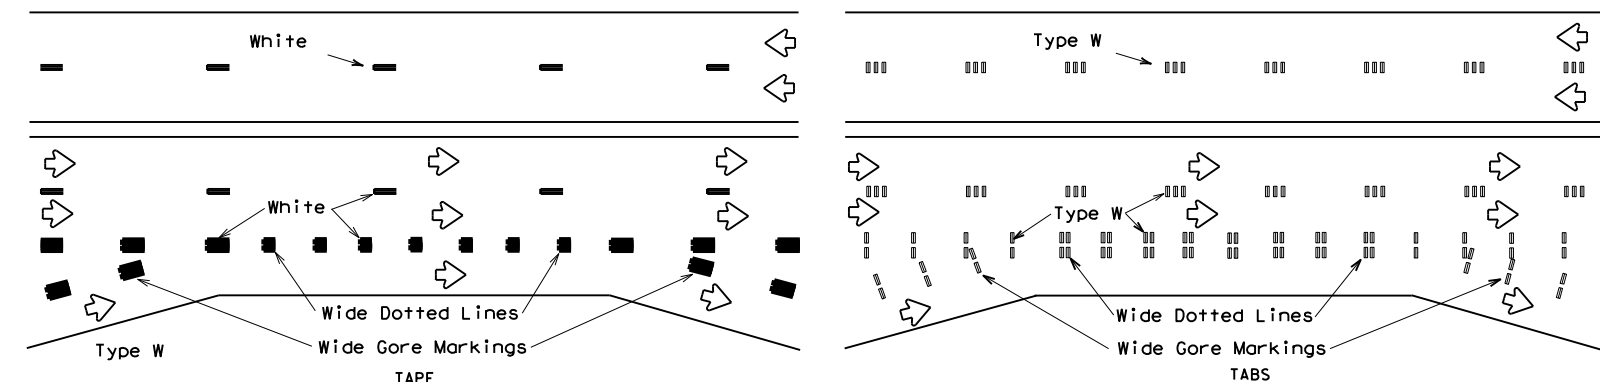


LANE LINES FOR DIVIDED HIGHWAY

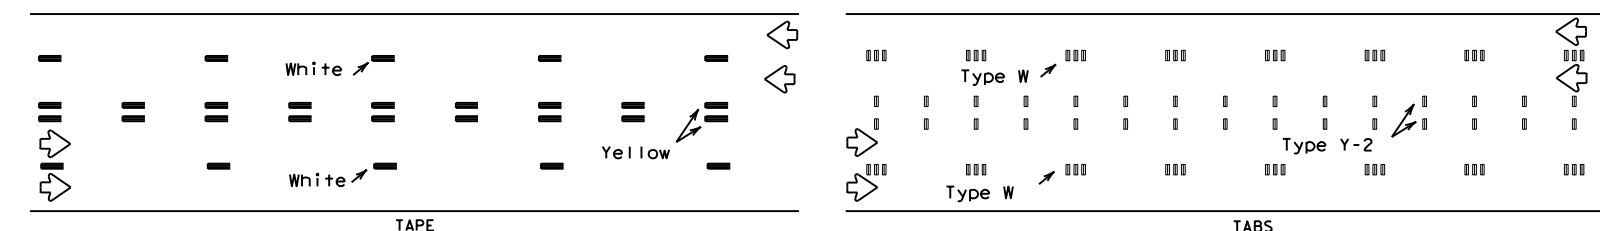

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

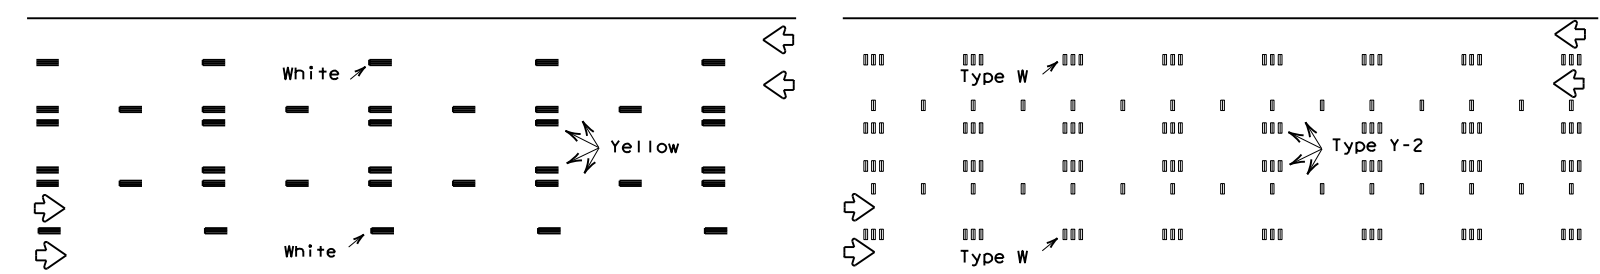

TWO-WAY LEFT TURN LANE



If raised pavement markers are used to supplement REMOVABLE short term markings, the markers shall be applied to the top of the tape at the approximate mid length of the tape. This allows an easier removal of raised markers and tape.

PREFABRICATED PAVEMENT MARKINGS

- Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.
- Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240 "Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Construction-Grade Prefabricated Pavement Markings."

RAISED PAVEMENT MARKERS

- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

- DMSs referenced above can be found along with embedded links to their respective MPLs at the following website:
http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm





WORK ZONE SHORT TERM PAVEMENT MARKINGS

WZ (STPM) - 13

FILE:	wzstpm-13.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	April 1992	CONT:	0265	SECT:	05	JOB:	089, ETC	SH:	71, ETC
REVISIONS		DIST:	AUS	COUNTY:	BASTROP	SHEET NO.:	41		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

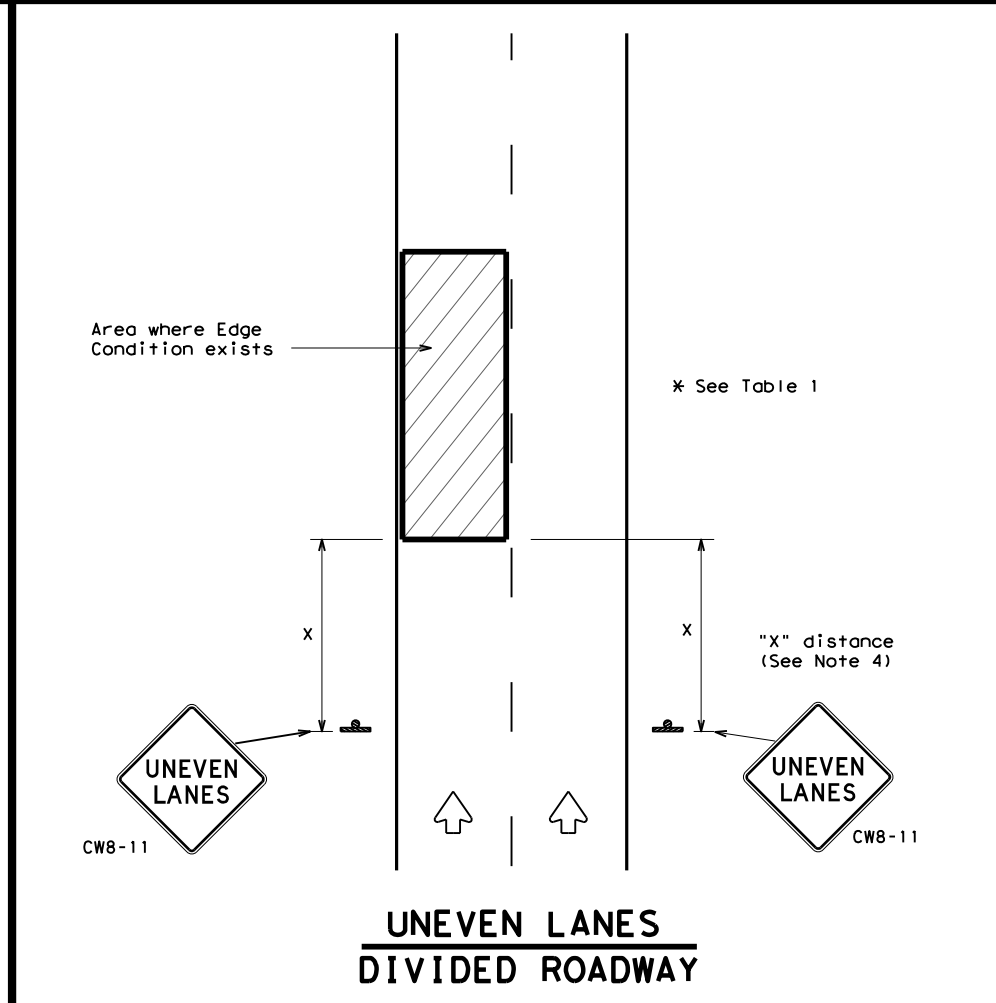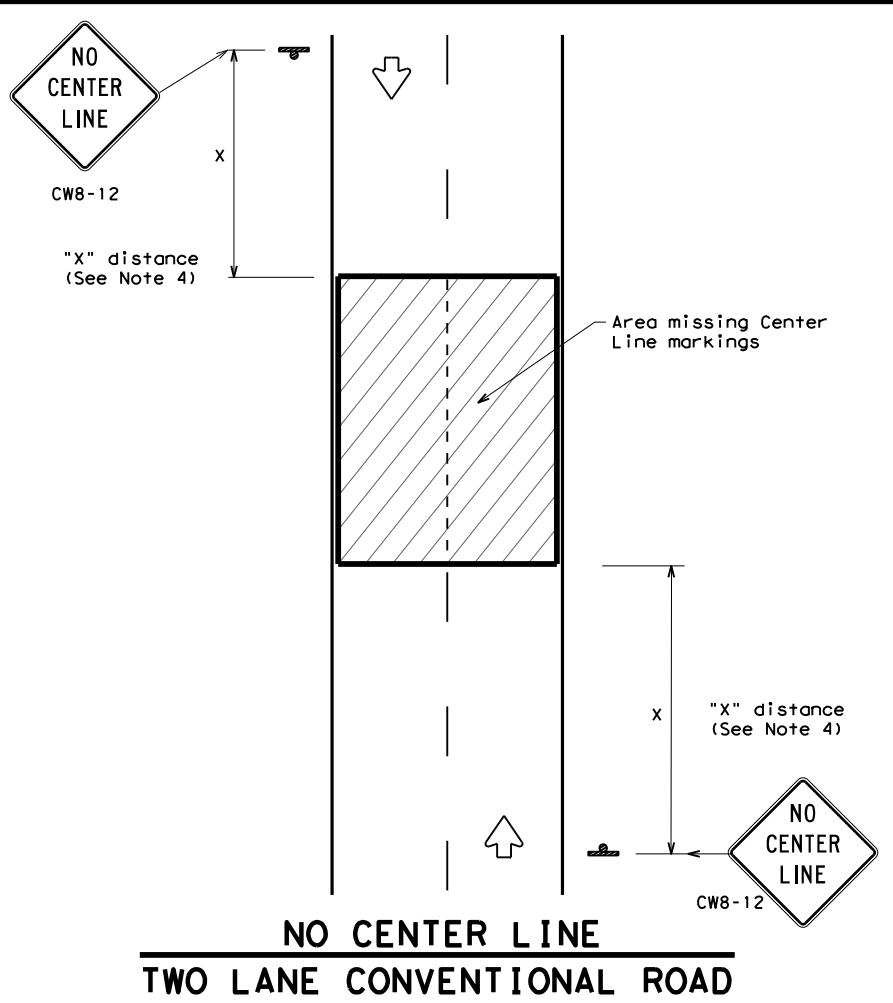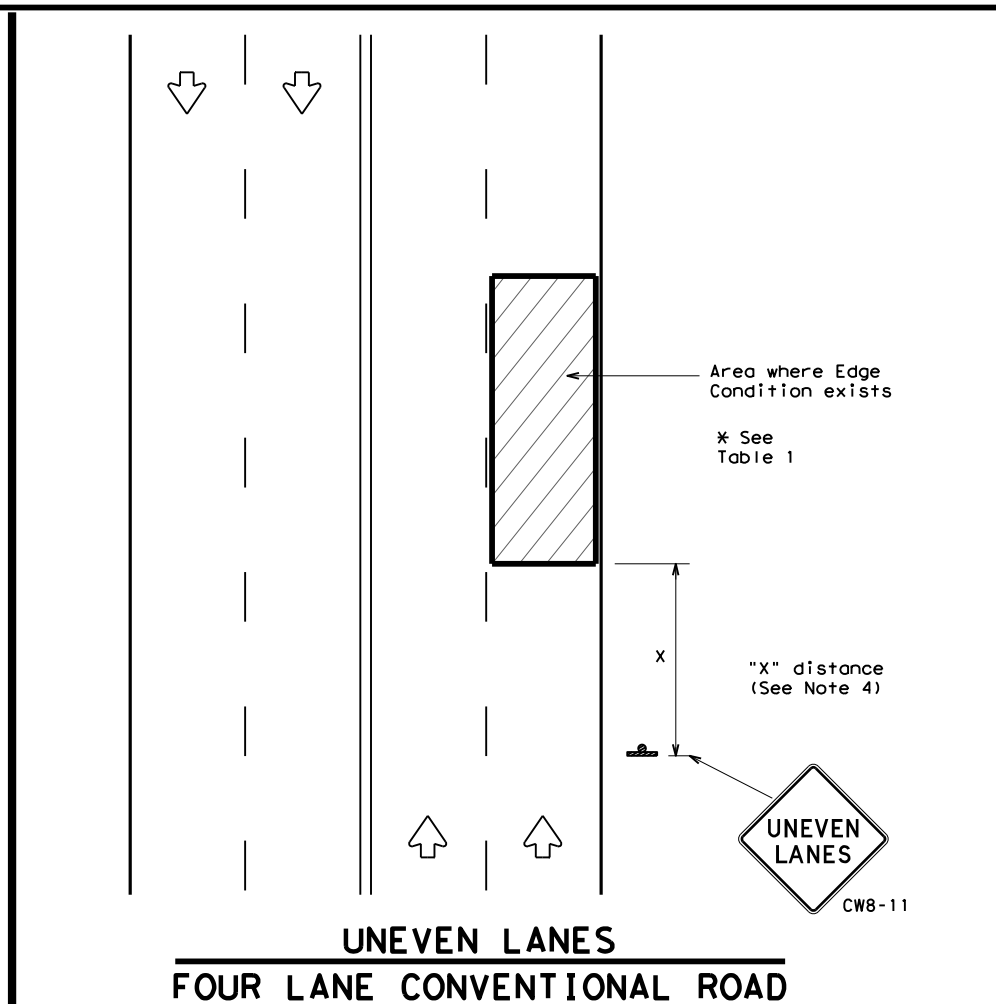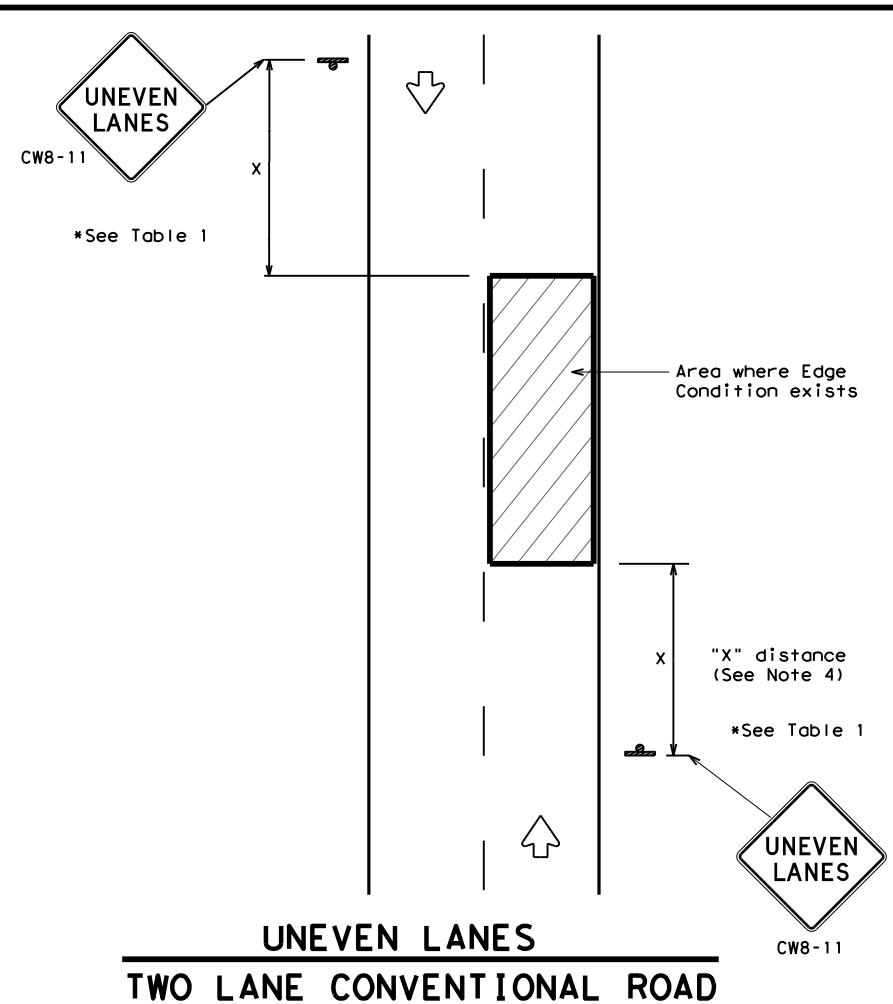

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY (REMOVABLE) PREFABRICATED PAVEMENT MARKINGS	DMS-8241
SIGN FACE MATERIALS	DMS-8300

COLOR	USAGE	SHEETING MATERIAL
ORANGE	BACKGROUND	TYPE B _{FL} OR TYPE C _{FL} SHEETING
BLACK	LEGEND & BORDERS	ACRYLIC NON-REFLECTIVE SHEETING

GENERAL NOTES

1. If spalling or holes occur, ROUGH ROAD (CW8-8) signs should be placed in advance of the condition and be repeated every two miles where the condition persists.
2. UNEVEN LANES (CW8-11) signs shall be installed in advance of the condition and repeated every mile. Signs installed along the uneven lane condition may be supplemented with the NEXT XX MILES (CW7-3aP) plaque or Advisory Speed (CW13-1P) plaque.
3. NO CENTER LINE (CW8-12) signs and temporary pavement markings as per the WZ(STPM) standard shall be installed if yellow centerlines separating two way traffic are obscured or obliterated. Repeat NO CENTER LINE signs every two miles where the center line markings are not in place. The signs and markings shall remain in place until permanent pavement markings are installed.
4. Signs shall be spaced at the distances recommended as per BC standards.
5. Additional signs may be required as directed by the Engineer. Signs shall remain in place until final surface is applied. Signs shall be considered subsidiary to Item 502 "BARRICADES, SIGNS AND TRAFFIC HANDLING."
6. Signs shall be fabricated and mounted on supports as shown on the BC standards and/or listed on the "Compliant Work Zone Traffic Control Devices" list.
7. Short term markings shall not be used to simulate edge lines.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition.

Edge Condition	Edge Height (D)	* Warning Devices
①	Less than or equal to: 1/4" (maximum-planing) 1/2" (typical-overlay)	Sign: CW8-11
②	Less than or equal to 3"	Sign: CW8-11
③	Distance "D" may be a maximum of 3" if uneven lanes with edge condition 2 or 3 are open to traffic after work operations cease. Uneven lanes should not be open to traffic when "D" is greater than 3".	

TRAFFIC CONTROL DURING PLANING, OVERLAY AND LEVELING OPERATIONS ARE SHOWN ELSEWHERE IN THE PLANS.

MINIMUM WARNING SIGN SIZE	
Conventional roads	36" x 36"
Freeways/expressways, divided roadways	48" x 48"

Texas Department of Transportation



SIGNING FOR UNEVEN LANES

WZ (UL) - 13

FILE: wzu1-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT April 1992	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
8-95 2-98 7-13	DIST	COUNTY	SHEET NO.	
1-97 3-03	AUS	BASTROP	42	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

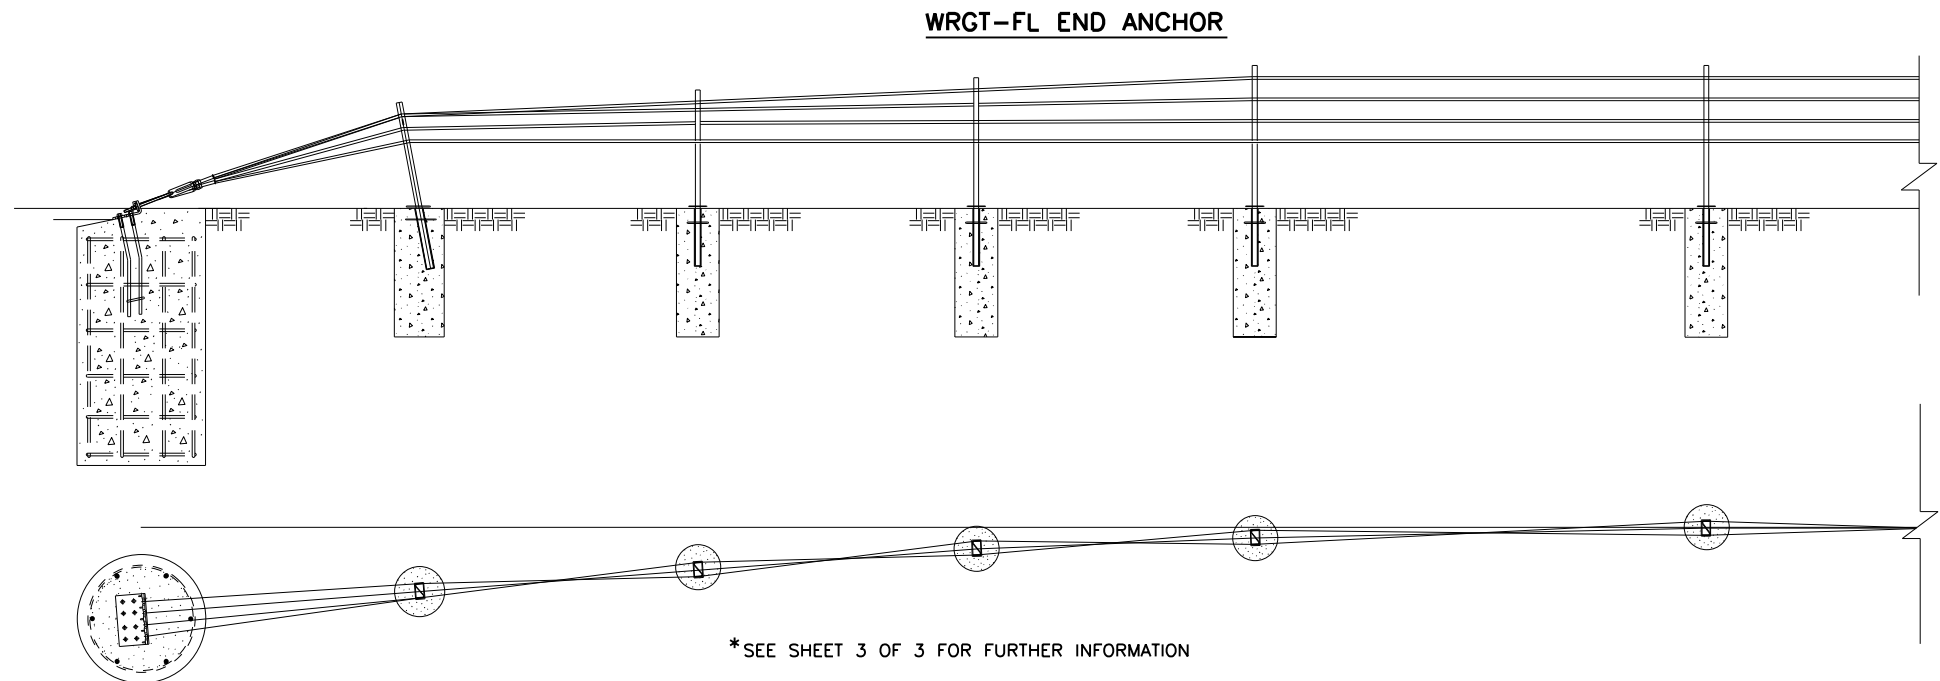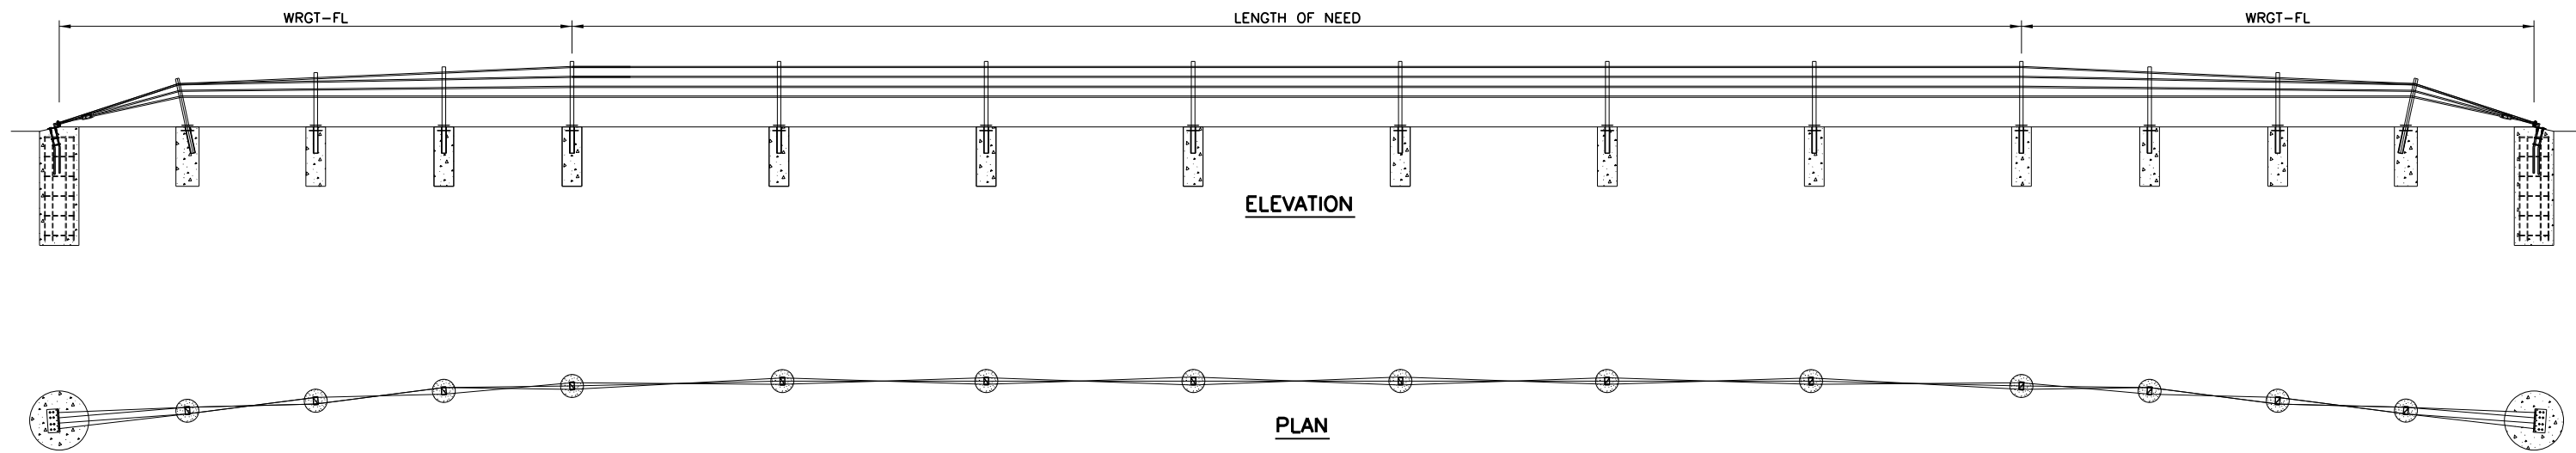

*SEE SHEET 3 OF 3 FOR FURTHER INFORMATION

ROPE TENSION TABLE		
ROPE TEMP (°F)	TENSION (LBS)	TENSION (kN)
0	5700	25.4
5	5550	24.7
10	5400	24.0
15	5250	23.4
20	5100	22.7
25	4950	22.0
30	4800	21.4
35	4650	20.74
40	4500	20.0
45	4350	19.3
50	4200	18.7
55	4050	18.0
60	3900	17.3
65	3750	16.7
70	3600	16.0
75	3450	15.3
80	3300	14.7
85	3150	14.0
90	3000	13.3
95	2850	12.7
100	2700	12.0
105	2550	11.3
110	2400	10.7
115	2250	10.0
120	2100	9.3
125	1950	8.7
130	1800	8.0
135	1650	7.3
140	1500	6.7

*ROPE TENSION: ± 20% AFTER 2-WEEK INTERVAL

GENERAL NOTES:

- BRIFEN DRAWINGS, SPECIFICATIONS, AND PRODUCT MANUAL SHOULD BE REVIEWED PRIOR TO STARTING AN INSTALLATION. FOR ADDITIONAL INFORMATION OR QUESTIONS, CONTACT BRIFEN USA, INC. AT 1-866-427-4336.
- THE BRIFEN WRSF HAS BEEN SUCCESSFULLY TESTED TO NCHRP 350 TL-4 CONDITIONS ON SLOPES 6:1 OR FLATTER AND NCHRP 350 TL-3 CONDITIONS ON SLOPES 4:1 TO 6:1.
- THE POST SPACING SHALL BE DETERMINED BY THE SPECIFYING AGENCY. POST SPACING MAY BE DECREASED TO AVOID OBSTRUCTIONS OR UTILITIES. IN NO EVENT SHALL THE POST SPACING EXCEED 21'-0".
- BRIFEN WRSF SHALL BE PLACED ON A SMOOTH SURFACE, WITHOUT HUMPS, DROP-OFFS, HOLES, ETC THAT WOULD INTERFERE WITH THE STABILITY OF THE ERRANT VEHICLE. GRADING, FILL AND COMPACT MAY BE REQUIRED TO ASSURE THAT ROPES ARE INSTALLED AT THE DESIGN HEIGHT.
- THE WRGT-FL END ANCHOR HAS BEEN SUCCESSFULLY TESTED TO NCHRP 350 TL-3 CONDITIONS. THE LENGTH OF NEED BEGINS 31'-0" FROM THE END ANCHOR. POSTS A THROUGH POST B3, SPACED 6'-6" APART, HAVE WEAKENED CUTS AT THE GROUND THAT SHALL FACE THE ANCHOR.
- ANCHOR AND LINE POST DIMENSIONS AND STEEL REINFORCEMENT WILL BE DETERMINED ON PROJECT SPECIFIC SOIL CLASSIFICATION, PROPERTIES AND TEMPERATURE EXTREMES. CONTACT BRIFEN USA, INC. FOR ADDITIONAL INFORMATION.
- ALL REINFORCEMENT AND CONCRETE FOR THE ANCHORS AND LINE POSTS PROVIDED BY OTHERS.
- REINFORCEMENT AND CONCRETE PROPERTIES SHALL MEET AGENCY SPECIFICATIONS.
- FOR PLACEMENT NEAR GUARDRAIL OR OTHER OBSTACLES CONTACT BRIFEN USA, INC. FOR ADDITIONAL DRAWINGS AND SUPPORT.
- TAPER RATES FOR THE BRIFEN WRSF ARE AS FOLLOWS:
HORIZONTAL: 25:1 MAXIMUM, 50:1 PREFERABLE
VERTICAL: 25:1 MAXIMUM, 50:1 PREFERABLE

SHEET 1 OF 3



**BRIFEN
WIRE ROPE SAFETY FENCE
(TL-4)**


BRIFEN(TL4) - 14

FILE: brifent1414.dgn	DN: TxDOT	CK: RM	DW: VP	CK:
© TxDOT: MARCH 2014	CONT: 0265	SECT: 05	JOB: 089, ETC	HIGHWAY: SH 71, ETC
REVISIONS		DIST: AUS	COUNTY: BASTROP	SHEET NO.: 43


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

LINE POST ASSEMBLY [Z11]

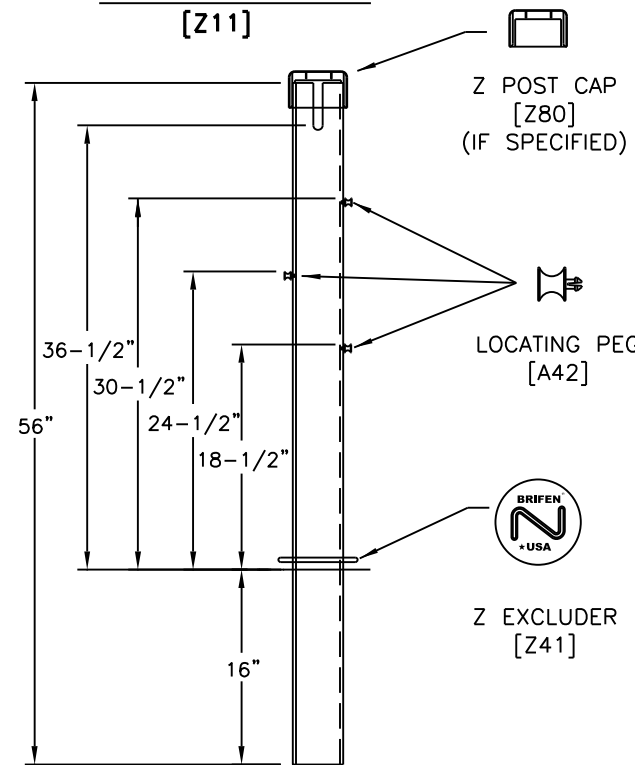

ELEVATION




PLAN

NOTES SPECIFIC TO LINE POST ASSEMBLY

1. ROPE HEIGHTS SHALL BE $\pm 1"$ TO GROUND LINE.
2. POST SHALL BE $\pm 4"$ FROM VERTICAL PLUMB.
3. POST CAPS SHALL BE USED IF SPECIFIED.
4. REFLECTORS SHALL BE SPACED ACCORDING TO AGENCY SPECIFICATIONS.
5. REFLECTORS CAN BE PLACED ON THE POST CAP OR POST.


ROPE CONNECTION DETAIL

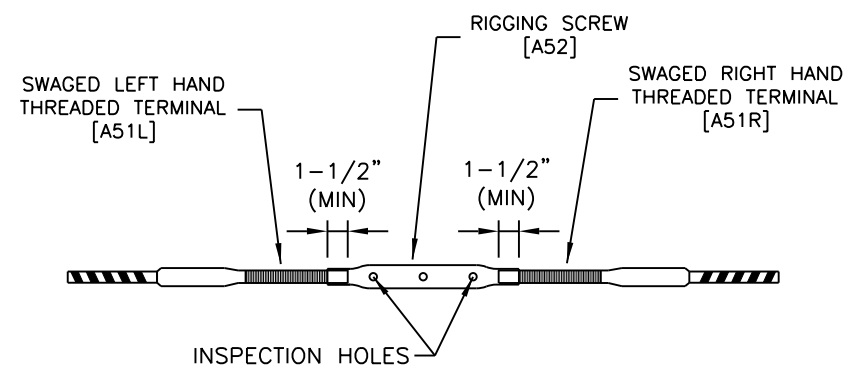


NOTES SPECIFIC TO ROPE CONNECTION DETAIL

1. THE WIRE ROPE TERMINALS SHALL BE THREADED A MINIMUM OF 1-1/2" INTO RIGGING SCREW.
2. AFTER FINAL TENSIONING, THE TERMINALS SHALL BE VISIBLE IN THE INSPECTION HOLES.

SOCKET ASSEMBLY

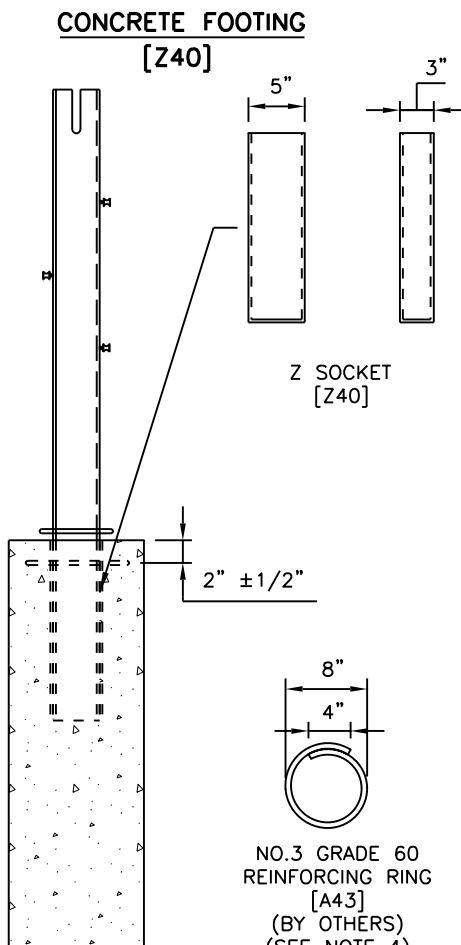

ELEVATION




PLAN

NOTES SPECIFIC TO CONCRETE FOOTING

1. SIZE OF FOOTING WILL BE DETERMINED BY SOIL CONDITIONS, FOUNDATION TYPE AND PROJECT CONDITIONS.
2. CONCRETE BASED ON AGENCY SPECIFICATIONS.
3. CONCRETE BY OTHERS.
4. REINFORCING RING (BY OTHERS) WILL BE USED ACCORDING TO FOUNDATION SIZE AND TYPE. THE REINFORCING RING MAY BE OMITTED IF THE FOOTING IS PLACED IN A CONTINUOUS CONCRETE MOW STRIP.
5. FOOTING SHALL BE FLUSH WITH THE GROUND LINE, TO A MAXIMUM OF 1 INCH BELOW OR ABOVE GROUND LINE.
6. SOCKET SHALL BE $\pm 2^\circ$ OF VERTICAL PLUMB.

DRIVE SOCKET [Z44]

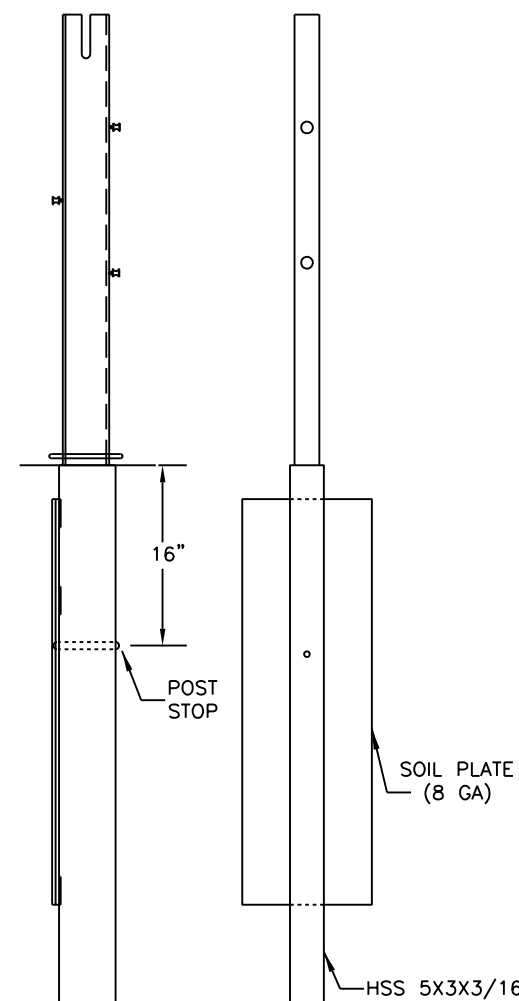

ELEVATION

SIDE



PLAN

NOTES SPECIFIC TO DRIVE SOCKETS

1. SIZE OF SOIL PLATE WILL BE DETERMINED BY SOIL CONDITIONS AND PROJECT CONDITIONS.
2. THE SOIL PLATE SHALL BE PARALLEL TO ROADWAY AND CAN FACE TOWARD OR AWAY FROM THE TRAVEL LANE.
3. FOOTING SHALL BE FLUSH WITH THE GROUND LINE, TO A MAXIMUM OF 1 INCH BELOW OR ABOVE GROUND LINE.
4. SOCKET SHALL BE $\pm 2^\circ$ OF VERTICAL PLUMB.
5. SOCKETS SHALL BE DRIVEN IN A MANNER TO NOT DISTORT OR DESTROY THE TOP OF SOCKET TO A DEGREE THAT PLACES THE SOCKET OR LINE POST OUT OF CONSTRUCTION TOLERANCES.

GENERAL NOTES:

1. BRIFEN DRAWINGS, SPECIFICATIONS, AND PRODUCT MANUAL SHOULD BE REVIEWED PRIOR TO STARTING AN INSTALLATION. FOR ADDITIONAL INFORMATION OR QUESTIONS, CONTACT BRIFEN USA, INC. 1-866-427-4336.
2. THE BRIFEN WRSF HAS BEEN SUCCESSFULLY TESTED TO NCHRP 350 TL-4 CONDITIONS ON SLOPES 6:1 OR FLATTER AND NCHRP 350 TL-3 CONDITIONS ON SLOPES 4:1 TO 6:1.
3. THE POST SPACING SHALL BE DETERMINED BY THE SPECIFYING AGENCY. POST SPACING MAY BE DECREASED TO AVOID OBSTRUCTIONS OR UTILITIES. IN NO EVENT SHALL THE POST SPACING EXCEED 21'-0".
4. BRIFEN WRSF SHALL BE PLACED ON A SMOOTH SURFACE, WITHOUT HUMPS, DROP-OFFS, HOLES, ETC THAT WOULD INTERFERE WITH THE STABILITY OF THE ERRANT VEHICLE. GRADING, FILL AND COMPACTION MAY BE REQUIRED TO ASSURE THAT ROPES ARE INSTALLED AT THE DESIGN HEIGHT.

SHEET 2 OF 3



**BRIFEN
WIRE ROPE SAFETY FENCE
(TL-4)**


BRIFEN(TL4) - 14

FILE: brifent1414.dgn	DN: TxDOT	CK: RM	DW: VP	CK:
© TxDOT: MARCH 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
	DIST	COUNTY		SHEET NO.
	AUS	BASTROP		43A

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:


WRGT-FL END ANCHOR LAYOUT

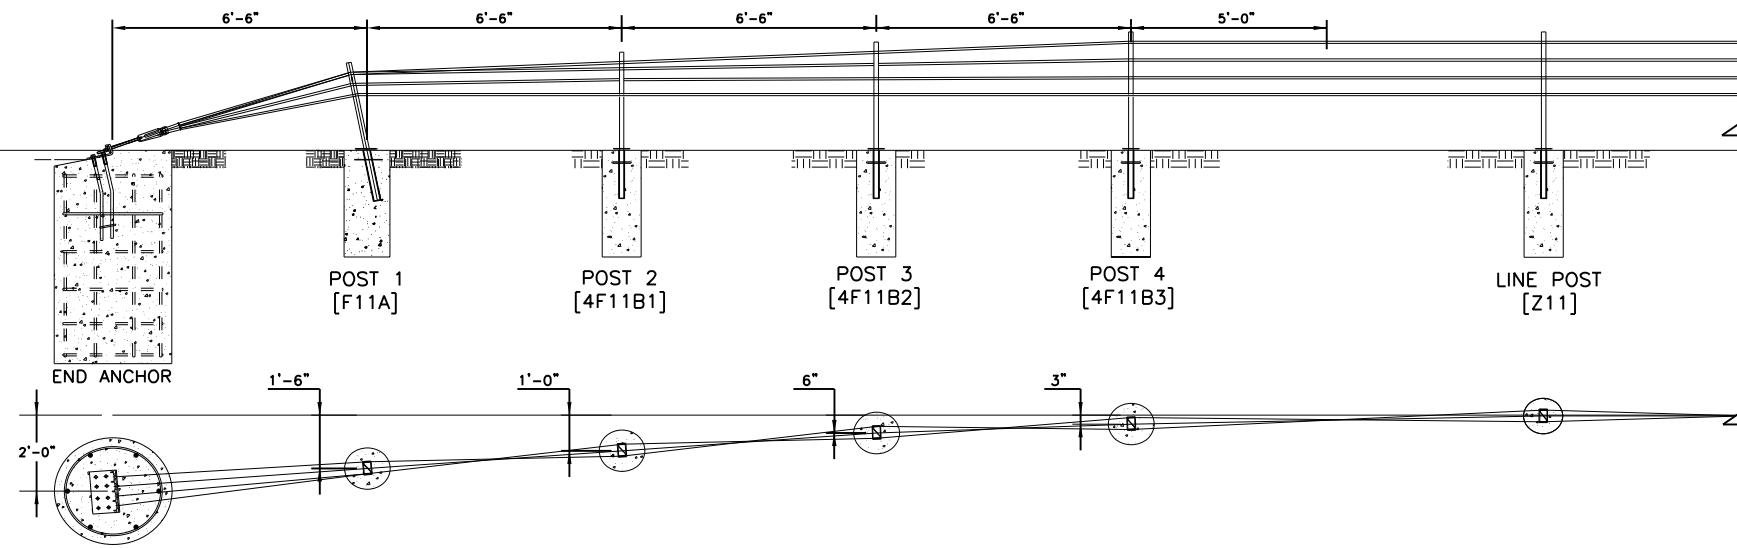

GENERAL NOTES:

- BRIFEN DRAWINGS, SPECIFICATIONS, AND PRODUCT MANUAL SHOULD BE REVIEWED PRIOR TO STARTING AN INSTALLATION. FOR ADDITIONAL INFORMATION OR QUESTIONS, CONTACT BRIFEN USA, INC. AT 1-866-427-4336.
- THE WRGT-FL END ANCHOR HAS BEEN SUCCESSFULLY TESTED TO NCHRP 350 TL-3 CONDITIONS. THE LENGTH OF NEED BEGINS 31'-0" FROM THE END ANCHOR. POSTS A THROUGH POST B3, SPACED 6'-6" APART, HAVE WEAKENED CUTS AT THE GROUND THAT SHALL FACE THE ANCHOR.
- ANCHOR AND LINE POST DIMENSIONS AND STEEL REINFORCEMENT WILL BE DETERMINED ON PROJECT SPECIFIC SOIL CLASSIFICATION, PROPERTIES AND TEMPERATURE EXTREMES. CONTACT BRIFEN USA, INC. FOR ADDITIONAL INFORMATION.
- ALL REINFORCEMENT AND CONCRETE FOR THE ANCHORS AND LINE POSTS PROVIDED BY OTHERS.
- REINFORCEMENT AND CONCRETE PROPERTIES SHALL MEET AGENCY SPECIFICATIONS.
- FOR PLACEMENT NEAR GUARDRAIL OR OTHER OBSTACLES CONTACT BRIFEN USA, INC. FOR ADDITIONAL DRAWINGS AND SUPPORT.


WRGT-FL POST DETAILS

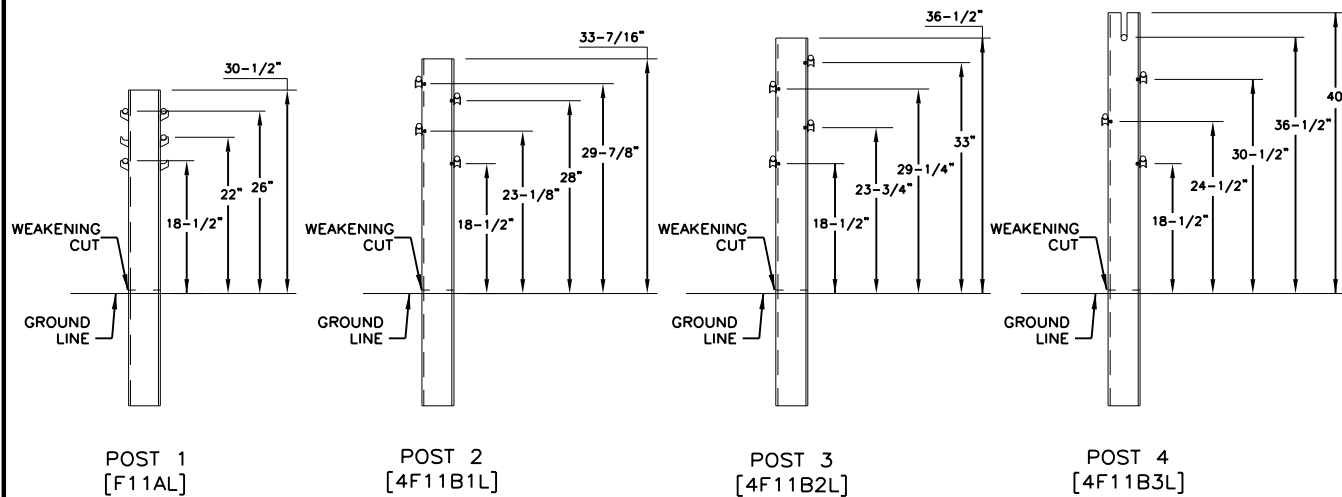

NOTES SPECIFIC TO WRGT-FL POST DETAIL

- ROPE HEIGHTS SHALL BE $\pm 1"$ TO GROUND LINE.
- POST SHALL BE $\pm 4"$ FROM VERTICAL PLUMB.
- POST CAPS SHALL BE USED IF SPECIFIED.
- REFLECTORS SHALL BE SPACED ACCORDING TO AGENCY SPECIFICATIONS.
- REFLECTORS CAN BE PLACED ON THE POST CAP OR POST.
- Z EXCLUDER (Z41) SHALL BE USED.
- POST A & SOCKET SHALL BE PLACED $79^\circ (\pm 4^\circ)$ TOWARD END ANCHOR FROM THE HORIZONTAL PLANE.
- POST A SOCKET SHALL BE PLACED IN 14" (MIN) CONCRETE FOUNDATION. DEPTH TO BE DETERMINED FROM SOIL CONDITIONS AND PROJECT CONDITIONS.
- FOUNDATIONS FOR POST 2 THRU 4 SHALL BE THE SAME AS THE LINE POST ASSEMBLY'S FOR THE PROJECT.
- WEAKENED CUTS SHALL FACE END ANCHOR.


END ANCHOR DETAILS

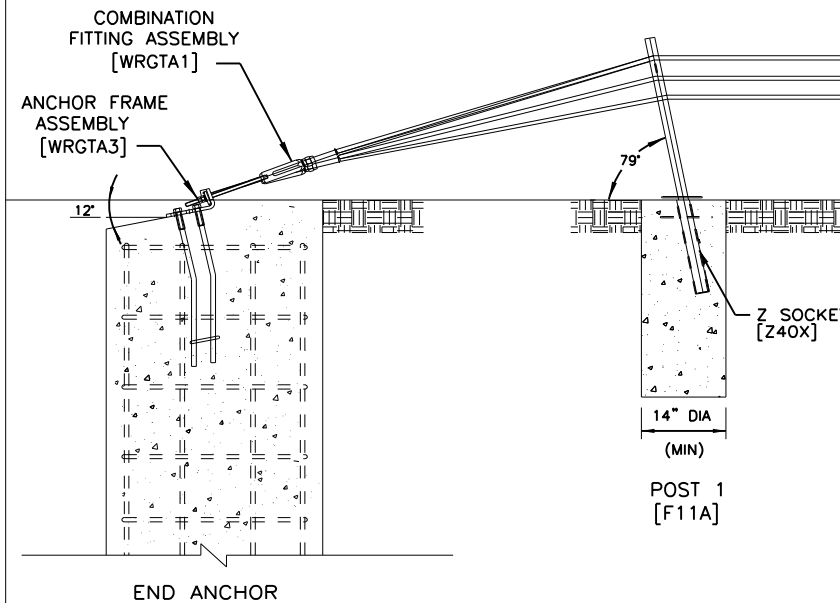

NOTES SPECIFIC TO END ANCHOR DETAIL

- THE END ANCHOR ASSEMBLY SHALL BE PLACED 12" (+3", -1") BELOW HORIZONTAL PLANE.
- POST 1 & SOCKET SHALL BE PLACED $79^\circ (\pm 4^\circ)$ TOWARD END ANCHOR FROM THE HORIZONTAL PLANE.
- POST 1 SOCKET SHALL BE PLACED IN 14" (MIN) CONCRETE FOUNDATION. DEPTH TO BE DETERMINED FROM SOIL CONDITIONS AND PROJECT CONDITIONS.

END ANCHOR COMPONENTS

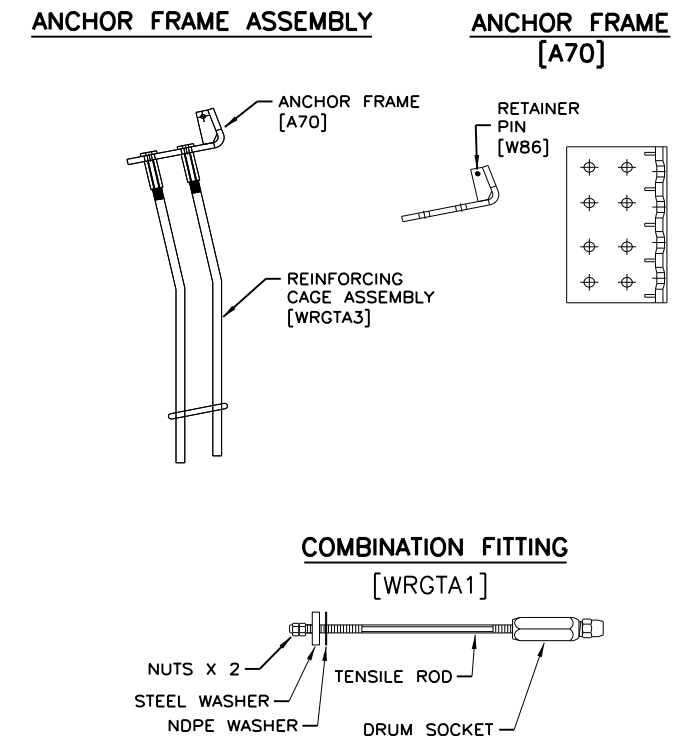

SHEET 3 OF 3



BRIFEN
WIRE ROPE SAFETY FENCE
(TL-4)












BRIFEN(TL4) - 14

FILE: brifentl414.dgn	DN: TxDOT	CK: RM	DW: VP	CK:
© TxDOT: MARCH 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	43B	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Preferred Installation: Locate post #2 away from nearest traffic. System has been successfully tested with opposite installation.

Length-of-Need Cass Cable Terminal (CCT):
Departure Installation: Length-of-Need: 44'-9" (At Post #8)
Approach Installation: Length-of-Need: 19'-9" (12" Past Post #4)

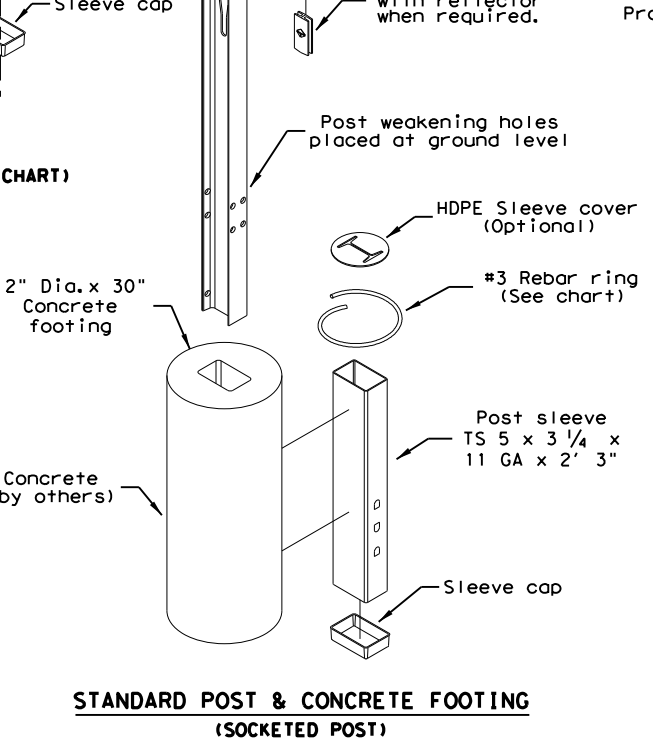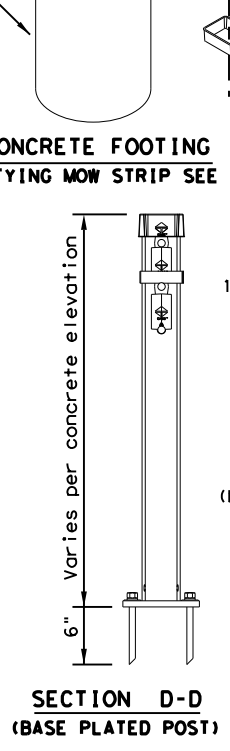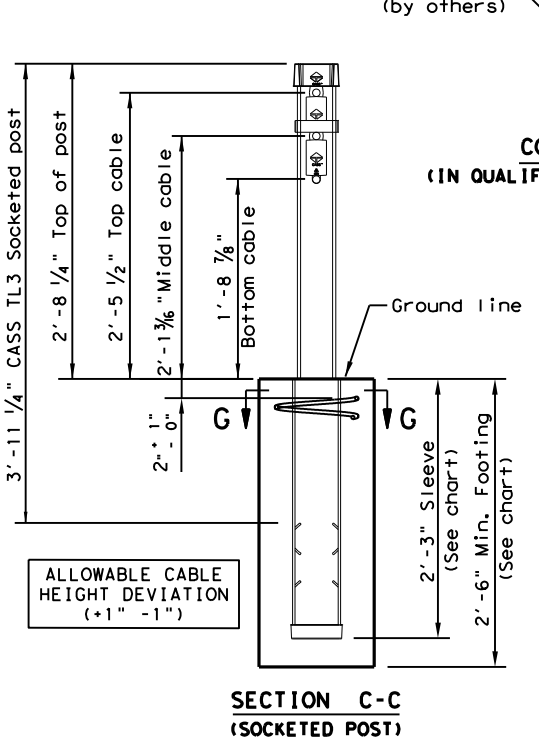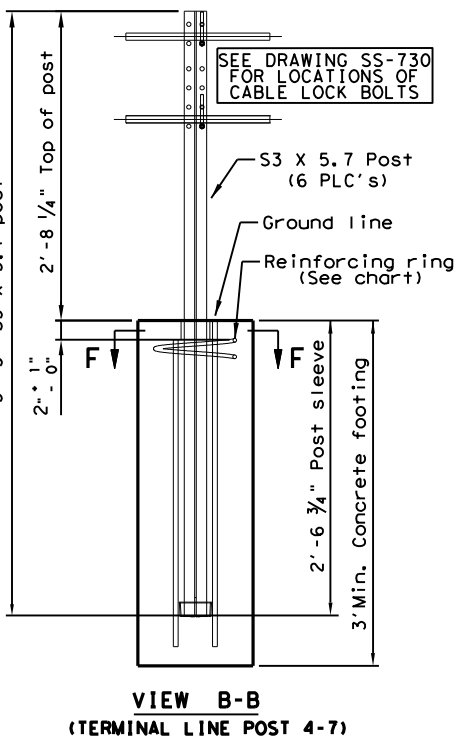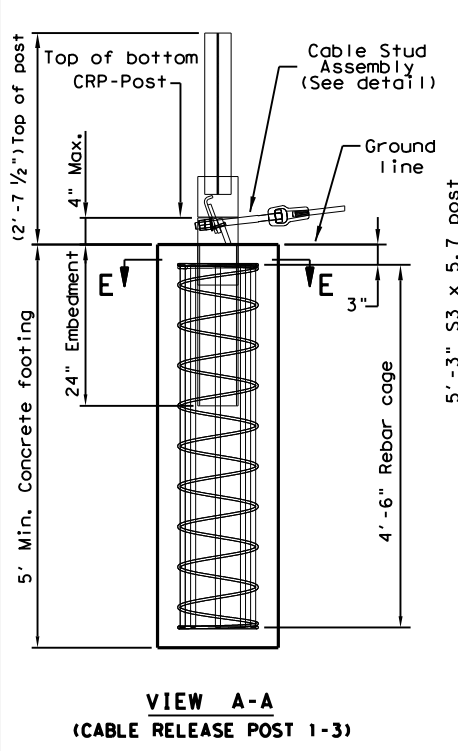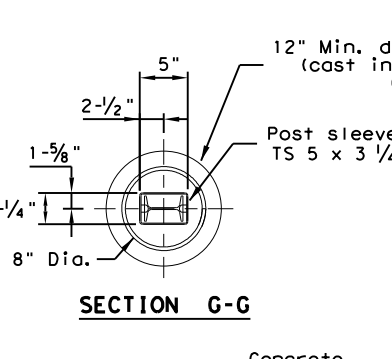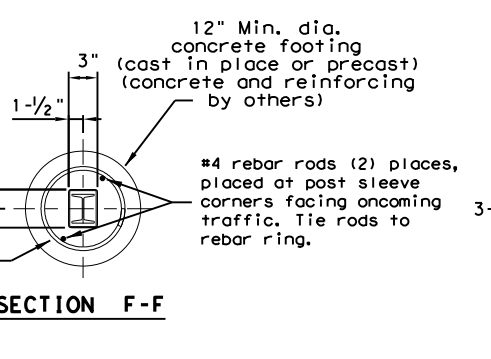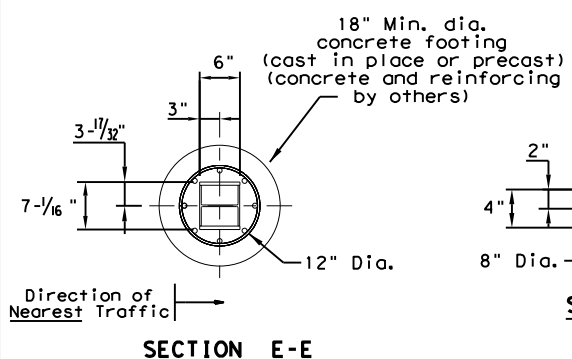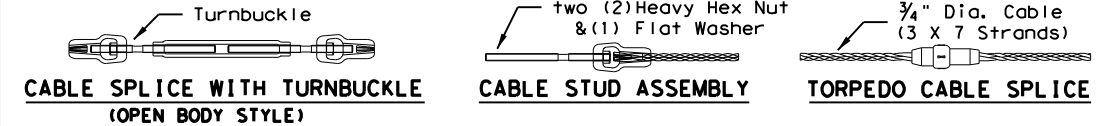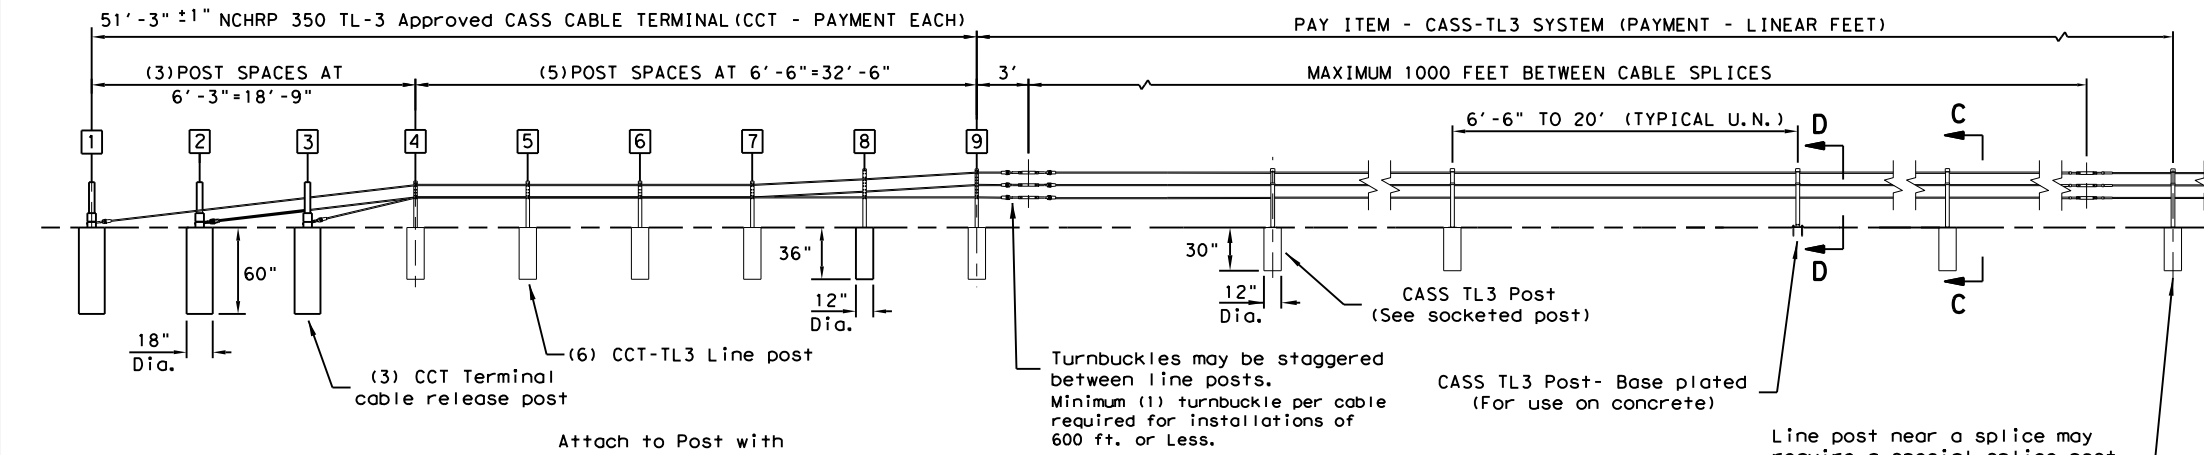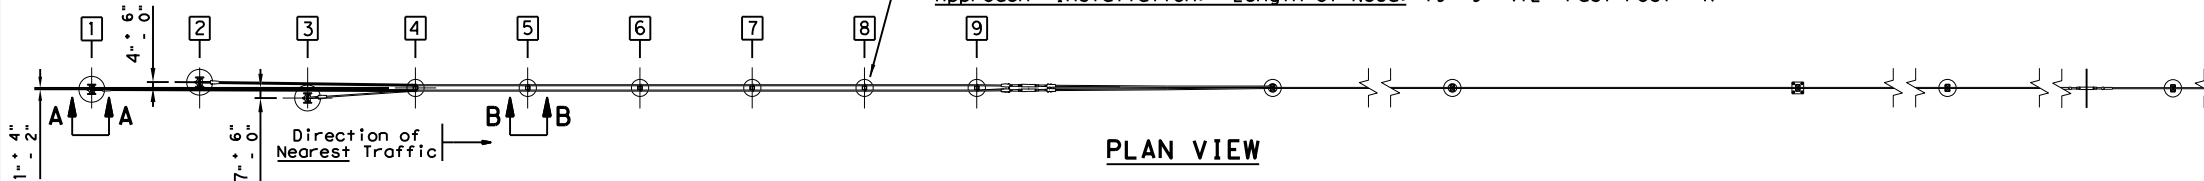

ELEVATION VIEW (TYPICAL LAY-OUT)

CONCRETE FOOTING (IN QUALIFYING MOW STRIP SEE CHART)

GENERAL NOTES

- This drawing is a general overview of CASS TL-3 Barrier System. See SS-730 (latest version) for specific details of CASS cable terminal (CCT) and cable safety system (CASS) requirements, proper installation, options and specification.
- CASS is designed for bi-directional traffic flows and can be installed on either side of the median. Contact Trinity (800-527-6050) or consult the design, installation, or repair manual(s) for additional information.
- All concrete for CASS footings shall be TxDOT class A. If class A or stronger concrete is utilized for the mowstrip, please see chart below for allowable footing depth and sleeve deviations.
- All posts shall be socketed unless otherwise specified. All cables shall be pre-stretched unless otherwise specified.
- For payment see Special Specification "Cable Barrier System".
- CASS TL-3 shall be installed on shoulders or medians with slopes of 6:1 or flatter without obstructions, depressions, etc. That may significantly affect the stability of an errant vehicle. Grading of site and/or appropriate fill materials may be required. The designer/installer shall "Flatten" or "Round" various topographical inconsistencies that could interfere with the ability of the installer to consistently maintain the design height (in relation to the terrain) of the cables. Please consult manual(s) and/or TxDOT Memo(s) for installations in "Ditch Sections".
- CASS TL-3 post spacing may be modified to avoid obstacles that conflict with the installation of CASS TL-3 line posts or to reduce deflection on radiuses. No post space can exceed the maximum post TxDOT space limit of 20'. Reducing or increasing post spacing affects deflection. CASS TL-3 may be laterally transferred at a rate not to exceed 30:1.
- Post foundations may be drilled through existing pavement. requirements in various applications.
- For aesthetic purposes Trinity recommends all sleeves, driven posts, and lower cable release posts to be installed reasonably plumb (approximately 1/8" per foot).
- CASS TL-3 shall be installed in well-drained, compacted, NCHRP Report 350 Standard soil. If soil does not meet this classification, if solid rock/concrete is encountered below grade or if soil is susceptible to severe freeze/thaw cycles, please contact Trinity about alternate footing design(s). Trinity suggests the use of "Mow strips" for erosion prevention and ease of maintenance / installation.
- See the Texas MUTCD for proper "Barrier" Delineation.

MOW STRIP DETAIL*			CONCRETE FOOTING CHART		
MOW STRIP	DEPTH	WIDTH	FOOTING	TUBE SLEEVE	REBAR RING
NONE			30" Min.	27" Min.	YES
HMA	6" Min.	3' Min.	27" Min.	15" Min.	NO
HMA	8" Min.	3' Min.	24" Min.	15" Min.	NO
RC	3" Min.	3' Min.	24" Min.	15" Min.	NO

Chart does not apply to Terminal Posts 1 thru 9.
 * Mow strip or pavement.
 HMA = Hot Mix Asphalt (Not Recycled Asphalt Pavement).
 RC = Reinforced Concrete (TxDOT Class A Minimum).

Trinity Highway Products, LLC.
 2525 Stemmons Freeway
 Dallas, TX 75207
 Phone: (800) 644-7976
 Product. INFO@TRIN.NET

CABLE TENSION CHART		
FAHRENHEIT DEGREES	PRE-STRETCHED LB / FORCE	
-10	7300	
0	7000	
10	6600	
20	6300	
30	6000	
40	5600	
50	5300	
60	5000	
70	4600	
80	4300	
90	4000	
100	3600	
110	3300	
120	3000	
130	2700	
140	2500	
150	2300	

Allowable deviation from chart in tangent sections: +800, -200 pounds/force. Cable tension readings are typically higher in curved cable sections.

Texas Department of Transportation
TRINITY CABLE SAFETY SYSTEM (TL-3)
CASS (TL3) - 14


FILE: casst1314.dgn	DN: TxDOT	CK: RM	DW: VP	CK:
©TxDOT: MARCH 2014	CONT: 0265	SECT: 05	JOB: 089, ETC	HIGHWAY: SH 71, ETC
REVISIONS	DIST: AUS	COUNTY: BASTROP	SHEET NO. 44	

DATE: FILE:


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Preferred Installation: Locate post #2 away from nearest traffic. System has been successfully tested with opposite installation.



Length-of-Need Cass Cable Terminal (CCT):
Departure Installation: Length-of-Need: 44'-9" (At Post #8)
Approach Installation: Length-of-Need: 19'-9" (12" Post Post #4)

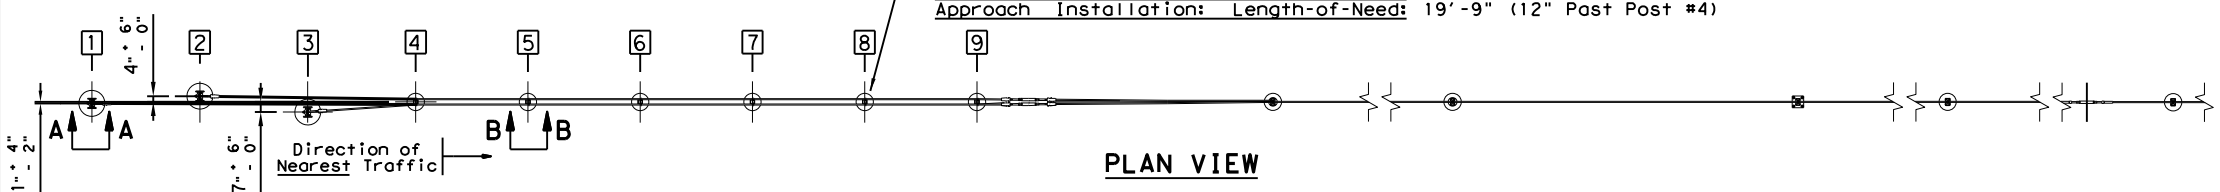


PLAN VIEW

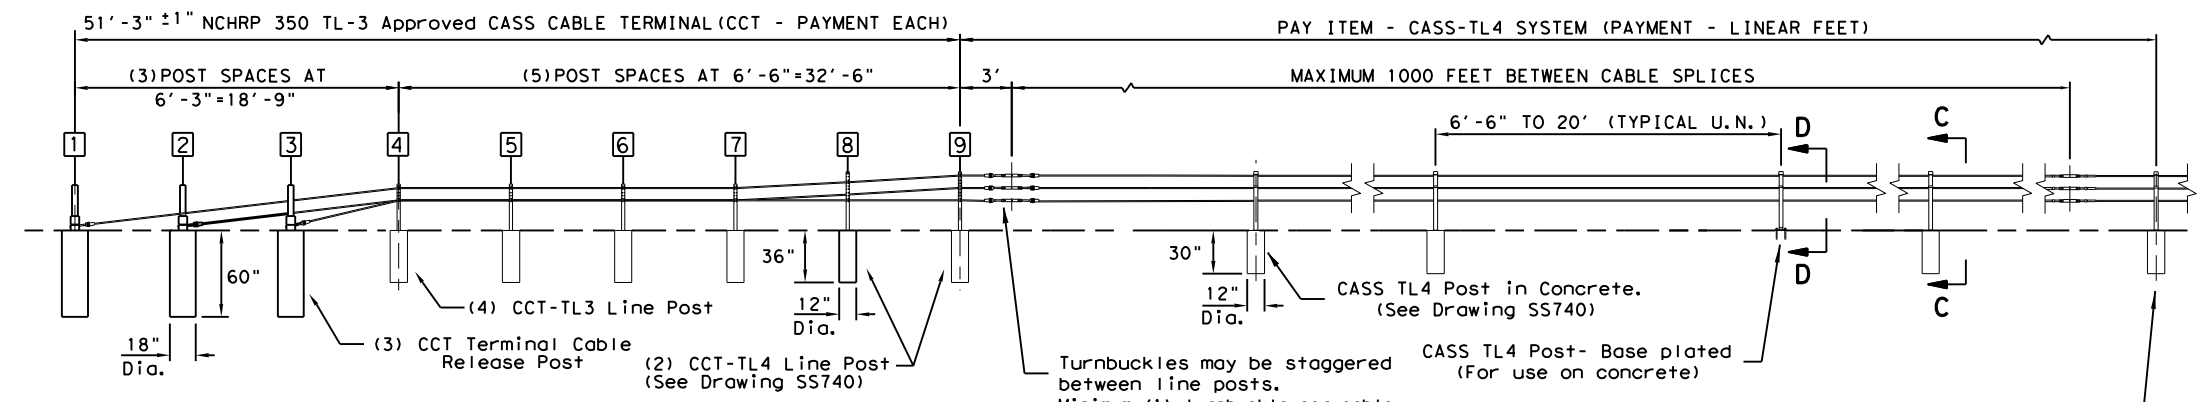


ELEVATION VIEW (TYPICAL LAY-OUT)

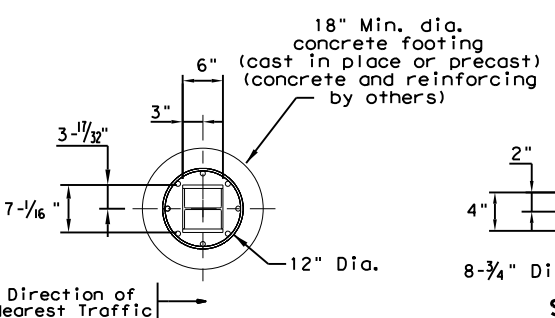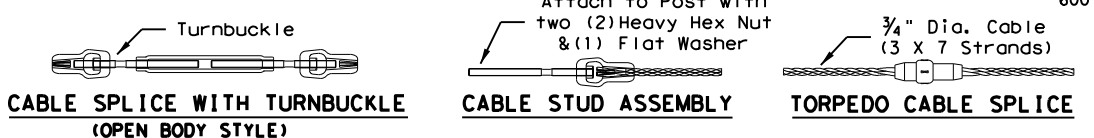


SECTION E-E

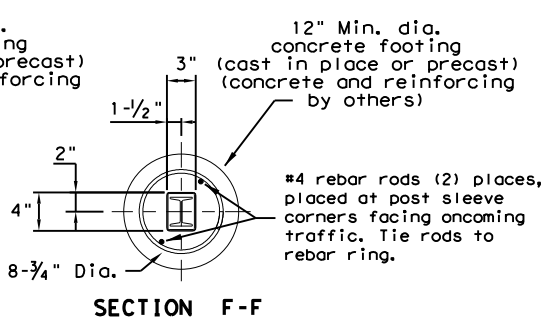


SECTION F-F

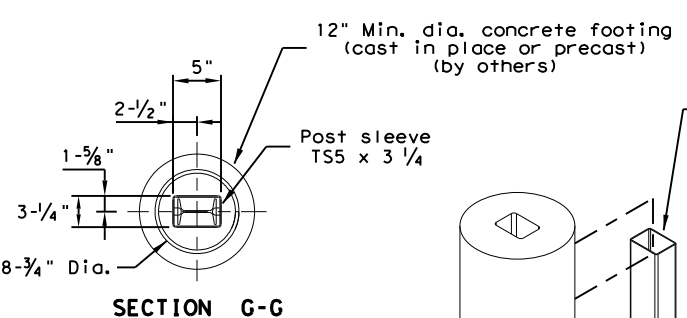


SECTION G-G

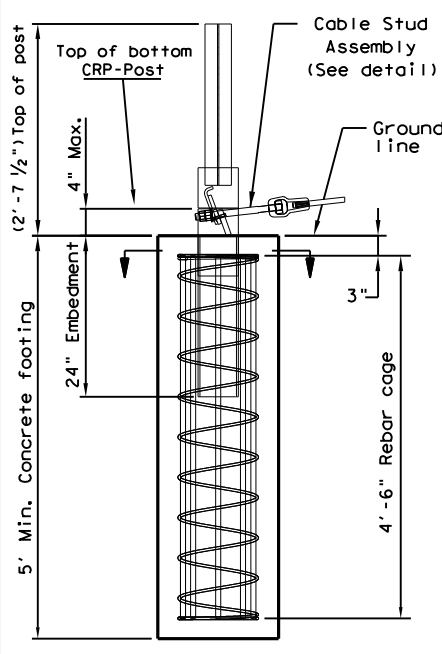


VIEW A-A (CABLE RELEASE POST 1-3)

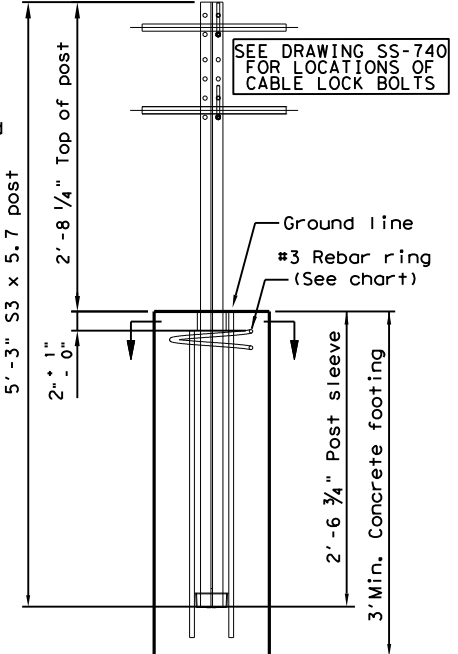


VIEW B-B (TERMINAL LINE POST 4-7)

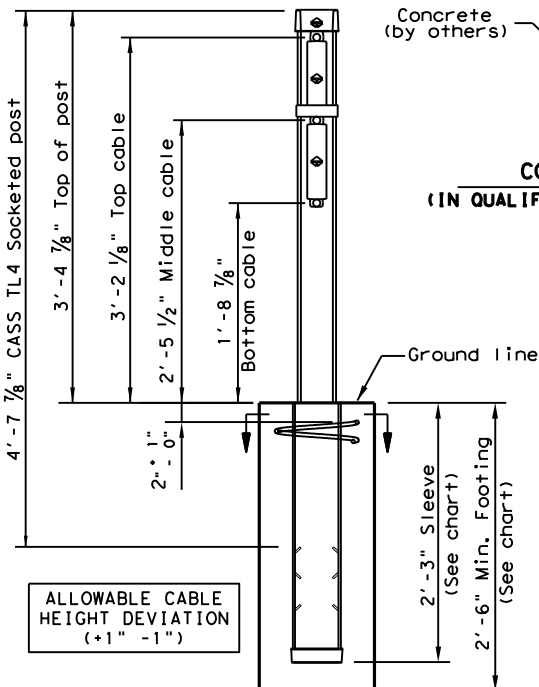

SECTION C-C (SOCKETED POST)

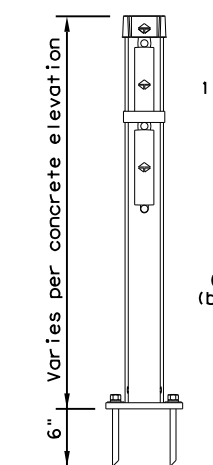

SECTION D-D (BASE PLATED POST)

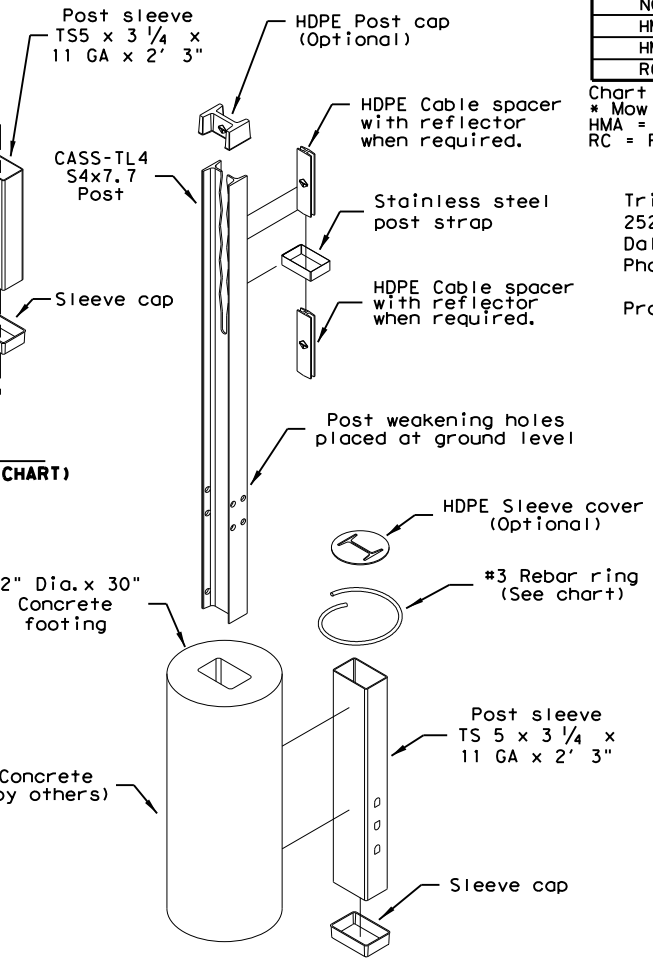

STANDARD POST & CONCRETE FOOTING (SOCKETED POST)

GENERAL NOTES

- This drawing is a general overview of CASS TL-4 Barrier System. See SS-740 (latest version) for specific details of CASS cable terminal (CCT) and cable safety system (CASS) requirements, proper installation, options and specification.
- CASS is designed for bi-directional traffic flows and can be installed on either side of the median. Contact Trinity (800-527-6050) or consult the design, installation, or repair manual(s) for additional information.
- All concrete for CASS footings shall be TxDOT class A. If class A or stronger concrete is utilized for the mowstrip, please see chart below for allowable footing depth and sleeve deviations.
- All posts shall be socketed unless otherwise specified. All cables shall be pre-stretched unless otherwise specified.
- For payment see Special Specification "Cable Barrier System".
- CASS-TL4 shall be installed on shoulders or medians with slopes of 6:1 or flatter without obstructions, depressions, etc. That may significantly affect the stability of an erring vehicle. Grading of site and/or appropriate fill materials may be required. The designer/installer shall "Flatten" or "Round" various topographical inconsistencies that could interfere with the ability of the installer to consistently maintain the design height (in relation to the terrain) of the cables. Please consult manual(s) and / or TxDOT Memo(s) for installations in "Ditch Sections".
- CASS TL-4 post spacing may be modified to avoid obstacles that conflict with the installation of cass-tl4 line posts or to reduce deflection on radiuses. No post space can exceed the maximum post TxDOT space limit of 20'. Reducing or increasing post spacing affects deflection. CASS TL-4 may be laterally transferred at a rate not to exceed 30:1.
- Post foundations may be drilled through existing pavement. Please see line post foundation chart for minimum footing requirements in various applications.
- For aesthetic purposes Trinity recommends all sleeves, driven posts, and lower cable release posts to be installed reasonably plumb (approximately 1/8" per foot).
- CASS TL-4 shall be installed in well-drained, compacted, NCHRP Report 350 Standard soil. If soil does not meet this classification, if solid rock/concrete is encountered below grade or if soil is susceptible to severe freeze/thaw cycles, please contact Trinity about alternate footing design(s). Trinity suggests the use of "Mow strips" for erosion prevention and ease of maintenance / installation.
- See the Texas MUTCD for proper "Barrier" Delineation.

MOW STRIP DETAIL*		CONCRETE FOOTING CHART			
MOW STRIP	DEPTH	WIDTH	FOOTING TUBE	SLEEVE	REBAR RING
NONE			30" Min.	27" Min.	YES
HMA	6" Min.	3' Min.	27" Min.	15" Min.	NO
HMA	8" Min.	3' Min.	24" Min.	15" Min.	NO
RC	3" Min.	3' Min.	24" Min.	15" Min.	NO

Chart does not apply to Terminal Posts 1 thru 9.
 * Mow strip or pavement.
 HMA = Hot Mix Asphalt (Not Recycled Asphalt Pavement).
 RC = Reinforced Concrete (TxDOT Class A Minimum).

Trinity Highway Products, LLC.
 2525 Stemmons Freeway
 Dallas, TX 75207
 Phone: (800) 644-7976
 Product: INFO@TRIN.NET

CABLE TENSION CHART	
FAHRENHEIT DEGREES	PRE-STRETCHED LB / FORCE
-10	7300
0	7000
10	6600
20	6300
30	6000
40	5600
50	5300
60	5000
70	4600
80	4300
90	4000
100	3600
110	3300
120	3000
130	2700
140	2500
150	2300










Allowable deviation from chart in tangent sections: +800, -200 pounds/force. Cable tension readings are typically higher in curved cable sections.

Texas Department of Transportation
TRINITY CABLE SAFETY SYSTEM (TL-4)
CASS (TL4) - 14

FILE: casst1414.dgn	DN: TxDOT	CK: RM	DW: VP	CK:
©TxDOT: March 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265 05	089, ETC	SH 71, ETC	
	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	45	

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

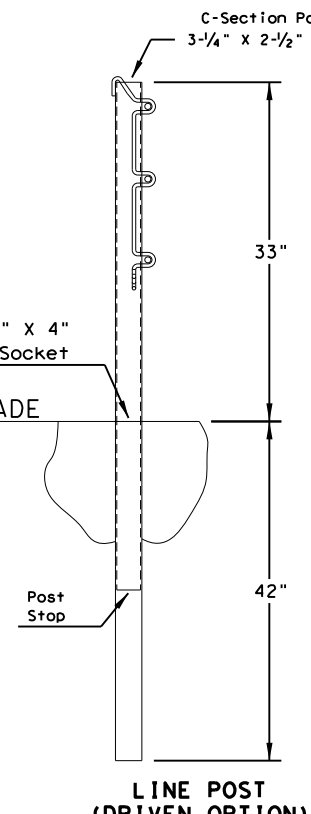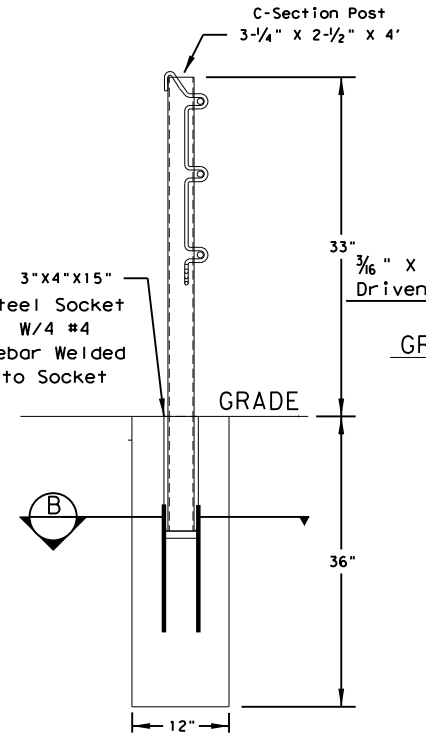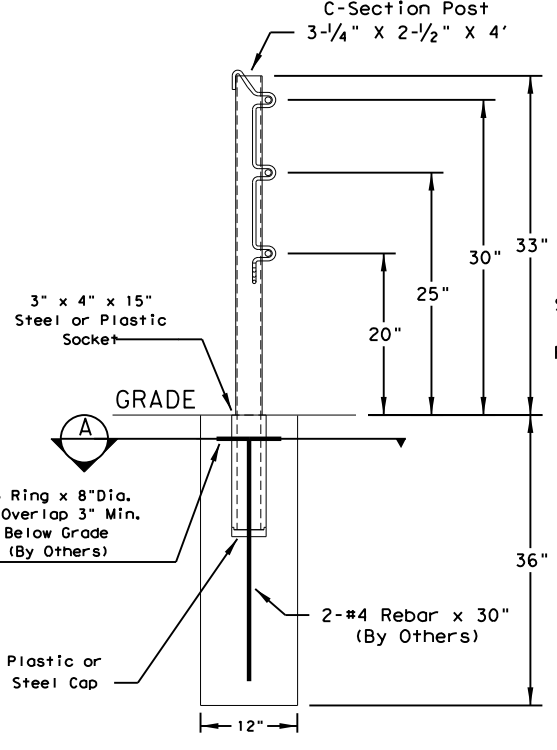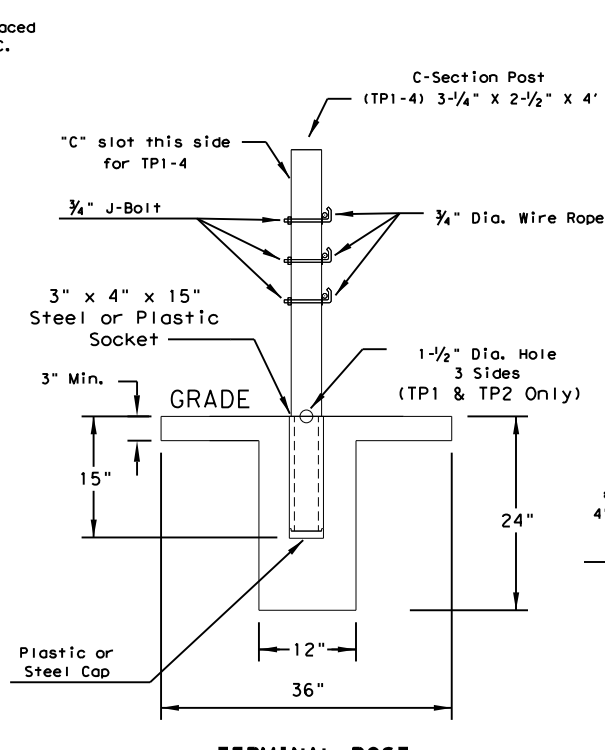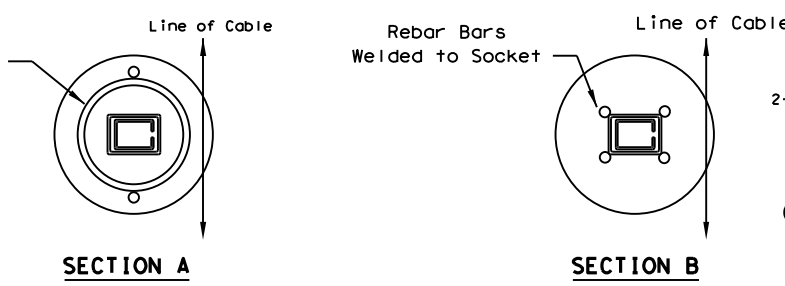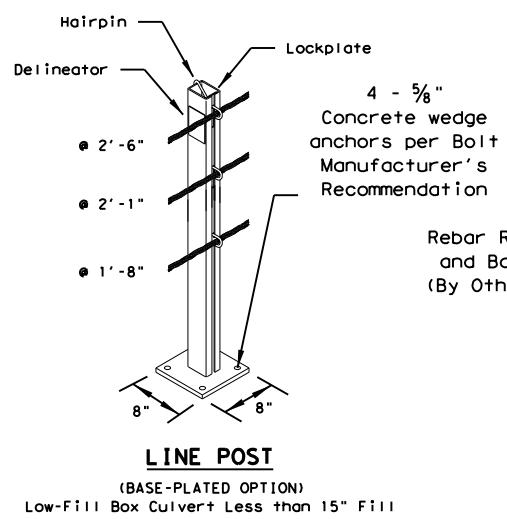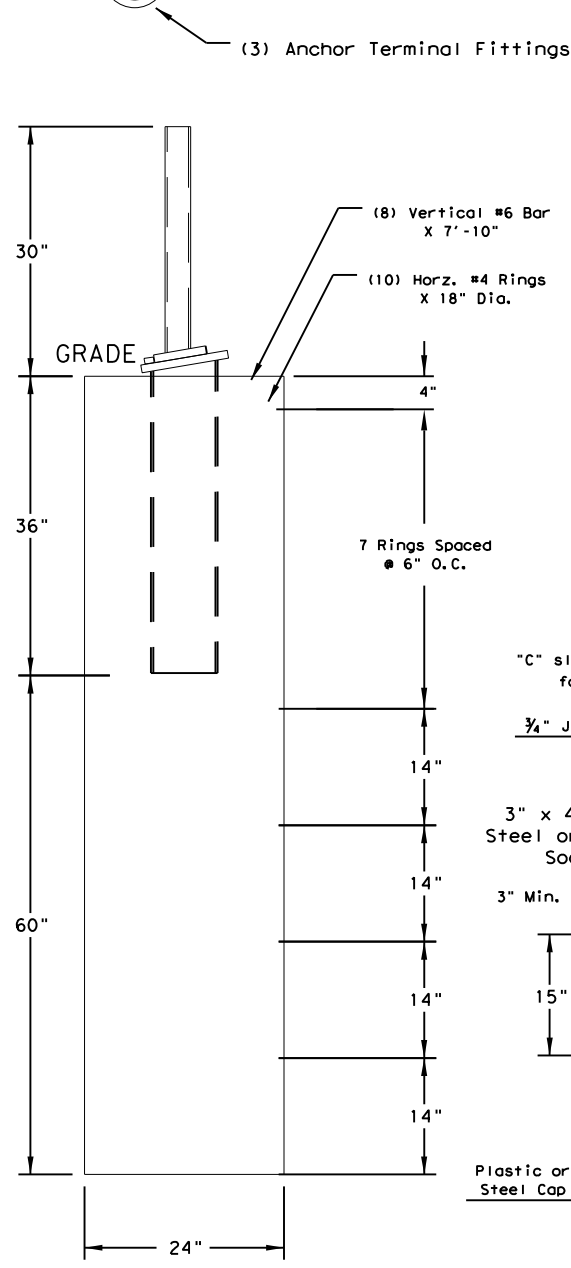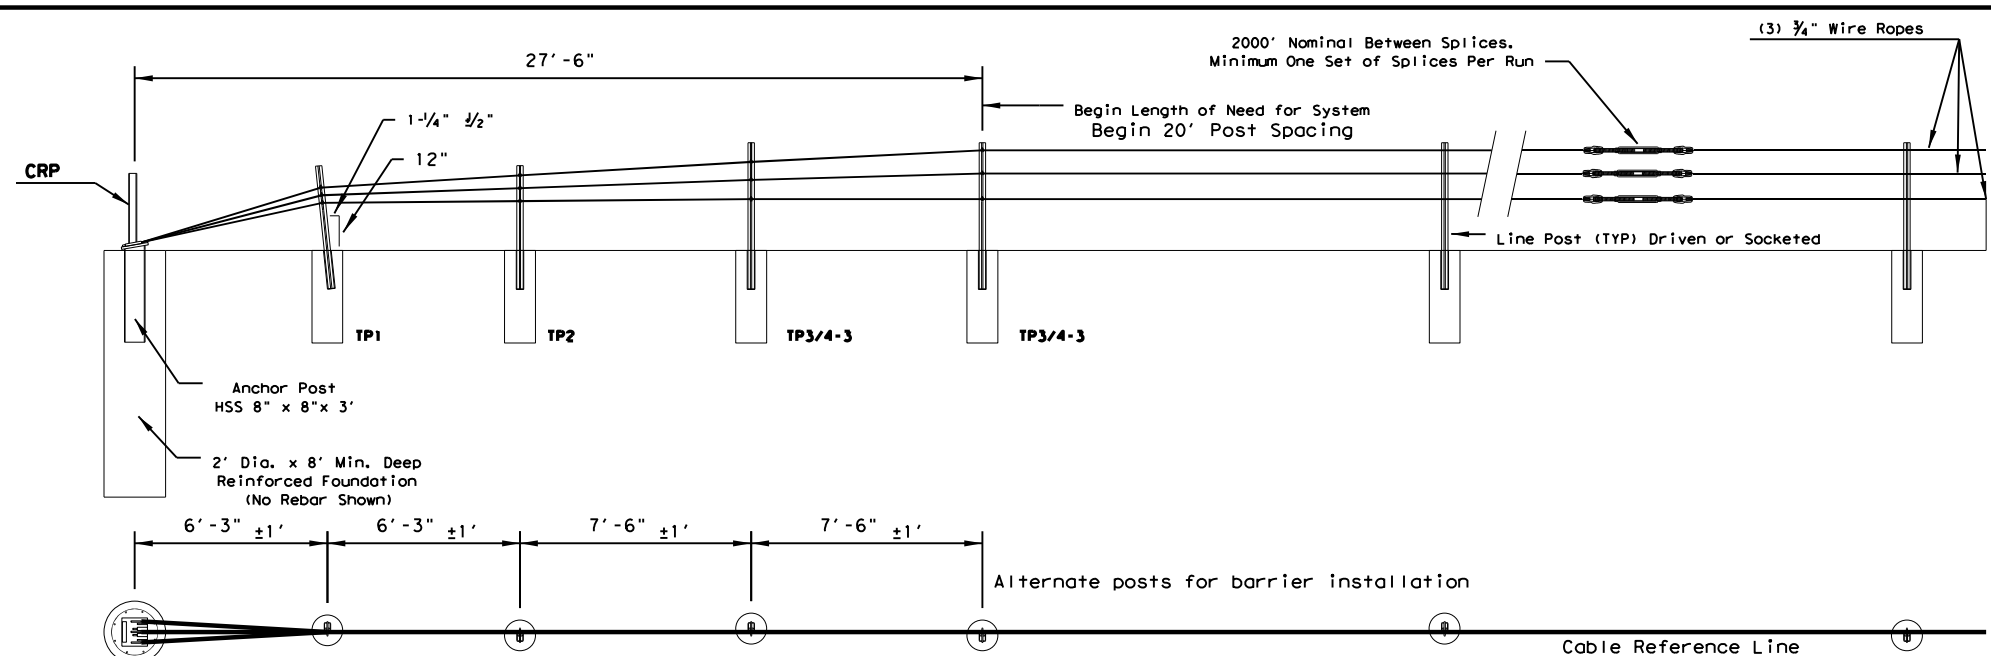

CABLE RELEASE AND ANCHOR POST

TERMINAL POST (SHOWN WITH CONCRETE MOWSTRIP)
(Shown with Tube Plate Option)
(See Note 9)

LINE POST SOCKETED
(Shown with Rebar Ring/Bars Socket Option)
(See Note 9)

LINE POST SOCKETED
(Shown with Welded Rebar Socket Option)
(See Note 9)

LINE POST (DRIVEN OPTION)
(Shown with Driven Socket Option)
(See Note 9)

GENERAL NOTES

- For additional information contact Gibraltar, Inc. at 1-800-495-8957, 830-798-5444, or see the manufacturer's product manual.
- All concrete shall be CLASS A.
- The Cable Barrier System shall be installed on shoulders or on medians with slopes of 6:1 or flatter.
- The Cable Barrier System is accepted by the FHWA Test Level - 3.
- See the Texas MUTCD for proper "Barrier" delineation.
- Rock Clause: Where solid rock is encountered:
 - For socketed post, continue digging 12" diameter, 15" deep into rock or the required plan depth, whichever comes first.
 - For driven post, core drill a 4" diameter hole 18" deep into rock or the required plan depth, whichever comes first.
 - For Anchor post, continue digging 24" diameter, 30" deep into rock or the required plan depth, whichever comes first.
- Tolerances:
 - LP = 3" out of plumb, at top
 - Cable height = 1"
 - Anchor Post = 5" off of Cable Reference Line
- The Gibraltar cable barrier system shall be installed in NCHRP Report 350 standard compacted soil. Soil must be well drained.
- All non-welded rebar by others.
- Minimum recommended line post foundation.
 - Without mowstrip, 36" Deep x 12" diameter foundations with #3 rebar ring x 8" diameter with two #4 rebar vertical bars 30" long
 - With 4" minimum depth hot mix asphalt, 30" deep x 12" diameter foundations with #3 rebar ring x 8" diameter with two #4 rebar vertical bars 30" long.
 - With 3" minimum depth concrete mowstrip, 24" deep x 12" diameter foundations. (No rebar required)
 - Direct drive post 42" deep.

CABLE TENSION CHART*	
-10 °F	8000
0 °F	7600
10 °F	7200
20 °F	6800
30 °F	6400
40 °F	6000
50 °F	5600
60 °F	5200
70 °F	4800
80 °F	4400
90 °F	4000
100 °F	3600
110 °F	3200

DEFLECTION	
Deflection	Post Spacing
8'-0"	20 FT
7'-0"	12 FT
6'-8"	10 FT

* Allowable Deviation from Chart +/- 10%


Texas Department of Transportation
GIBRALTAR CABLE BARRIER SYSTEM (TL-3)
GBRLTR (TL3) - 14

FILE: gbrltr1314.dgn	DN: TxDOT	CK: RM	DW: VP	CK:
©TxDOT: March 2014	CONT: 0265	SECT: 05	JOB: 0859, ETC	HIGHWAY: SH 71, ETC
REVISIONS:	DIST: AUS	COUNTY: BASTROP	SHEET NO.: 46	

Design Division Standard

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

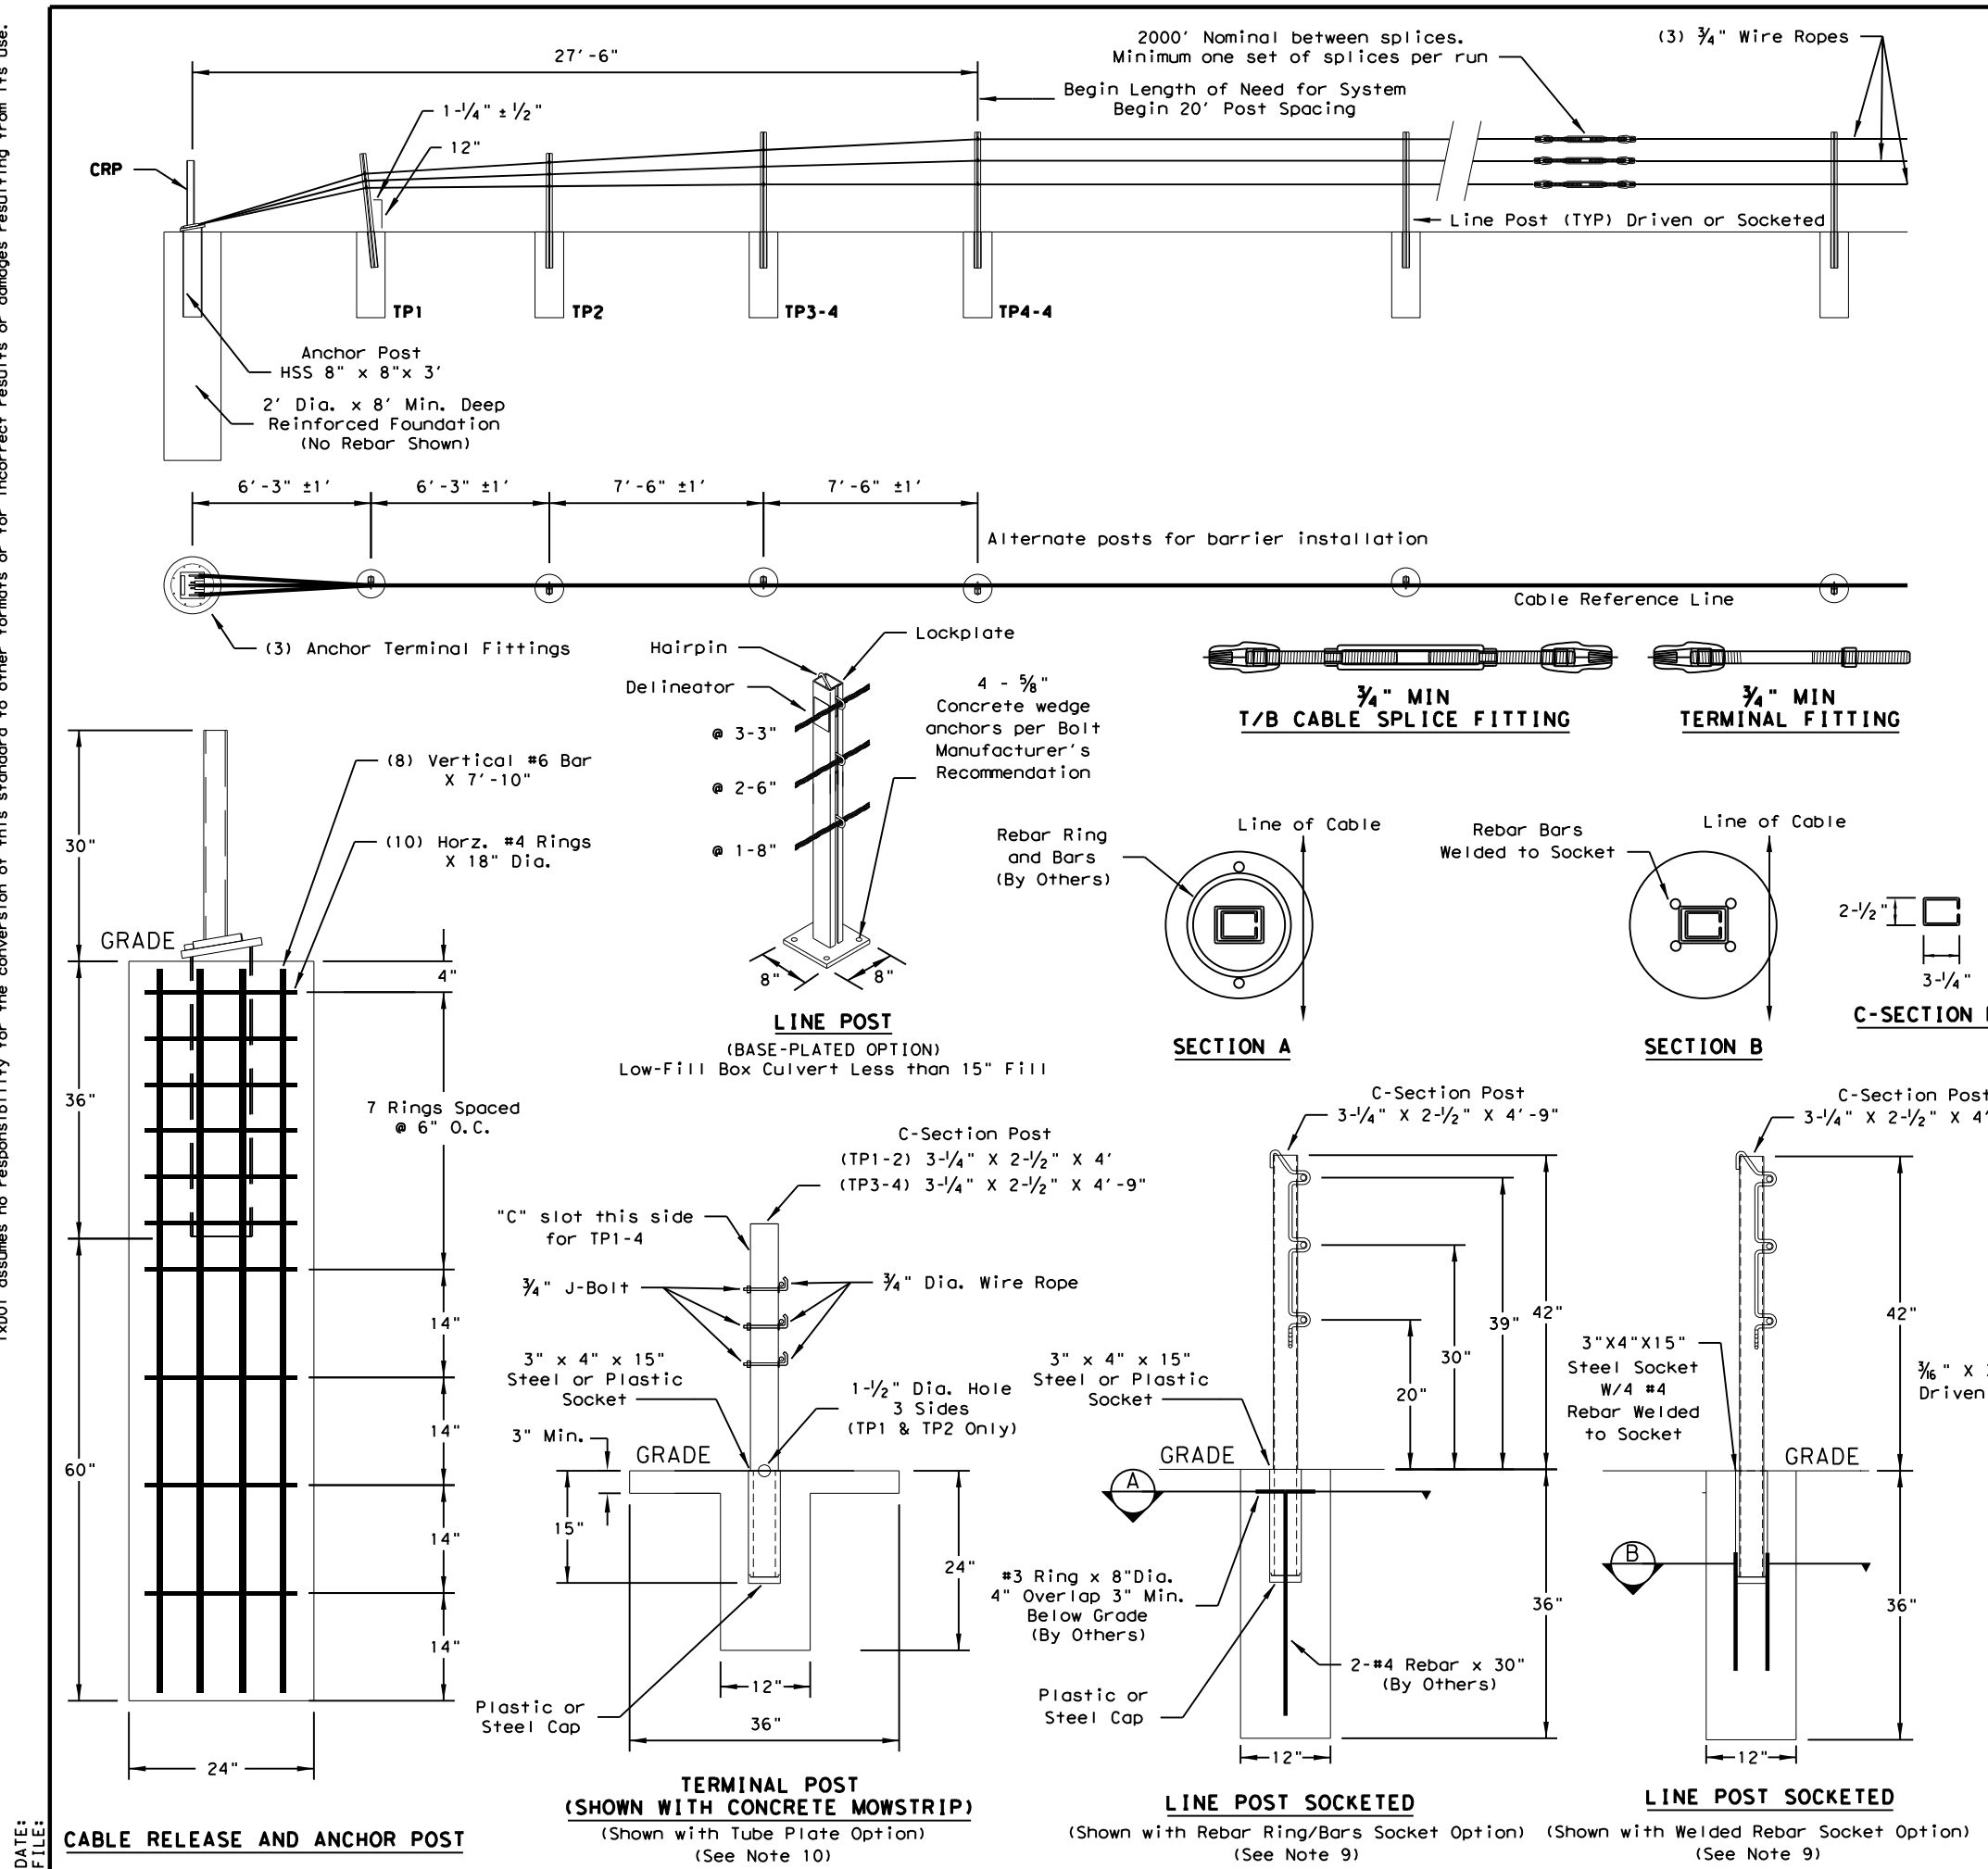

GENERAL NOTES

- For additional information contact Gibraltar, Inc. at 1-800-495-8957, 830-798-5444, or see the manufacturer's product manual.
- All concrete shall be CLASS A.
- The Cable Barrier System shall be installed on shoulders or on medians with slopes of 6:1 or flatter. If installed on slopes steeper than 6:1 up to 4:1 the TL-4 system performs as a TL-3 and Gibraltar must be contacted for various guidelines related to placement.
- The Cable Barrier System is accepted by the FHWA Test Level - 4.
- See the Texas MUTCD for proper "Barrier" delineation.
- Rock Clause: Where solid rock is encountered:
 - For socketed post, continue digging 12" diameter, 15" deep into rock or the required plan depth, whichever comes first.
 - For driven post, core drill a 4" diameter hole 18" deep into rock or the required plan depth, whichever comes first.
 - For Anchor post, continue digging 24" diameter, 30" deep into rock or the required plan depth, whichever comes first.
- Tolerances:
 - * LP = 3" out of plumb, at top
 - * Cable height = 1"
 - * Anchor Post = 5" off of Cable Reference Line
- The Gibraltar cable barrier system shall be installed in NCHRP Report 350 standard compacted soil. Soil must be well drained.
- All non-welded rebar by others.
- Minimum recommended line post foundation.
 - Without mowstrip, 36" Deep x 12" diameter foundations with #3 rebar ring x 8" diameter with two #4 rebar vertical bars 30" long
 - With 4" minimum depth hot mix asphalt, 30" deep x 12" diameter foundations with #3 rebar ring x 8" diameter with two #4 rebar vertical bars 30" long.
 - With 3" minimum depth concrete mowstrip, 24" deep x 12" diameter foundations. (No rebar required)
 - Direct drive post 42" deep.

CABLE TENSION CHART*

-10 °F	8000
0 °F	7600
10 °F	7200
20 °F	6800
30 °F	6400
40 °F	6000
50 °F	5600
60 °F	5200
70 °F	4800
80 °F	4400
90 °F	4000
100 °F	3600
110 °F	3200

DEFLECTION

Deflection	Post Spacing
8'-0"	20 FT
7'-0"	12 FT
6'-8"	10 FT

* Allowable Deviation from Chart +/- 10%







Texas Department of Transportation
GIBRALTAR CABLE BARRIER SYSTEM (TL-4)
GBRL TR (TL4) - 14

FILE: gbrl tr t1414.dgn	DN: TxDOT	CK: RM	DW: VP	CK:
© TxDOT: March 2014	CONT: 0265	SECT: 05	JOB: 089, ETC	HIGHWAY: SH 71, ETC
REVISIONS	DIST: AUS	COUNTY: BASTROP	SHEET NO.: 47	

Design Division Standard

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

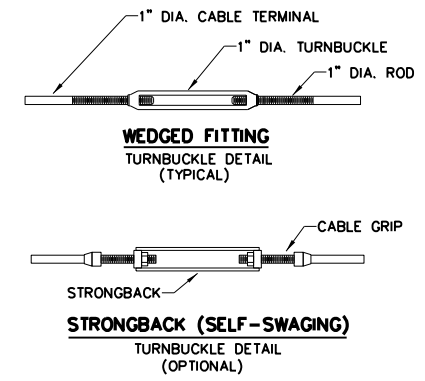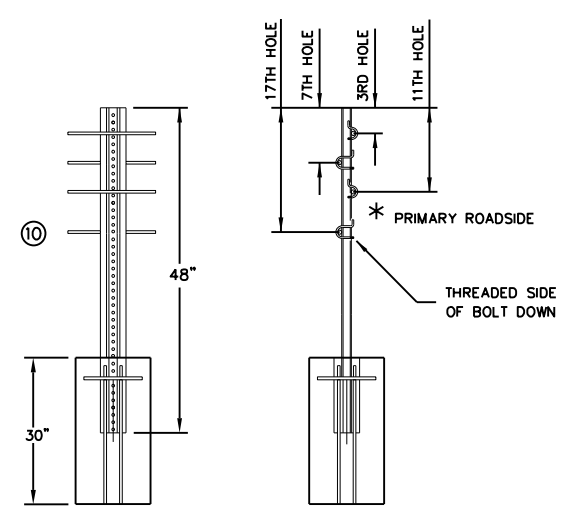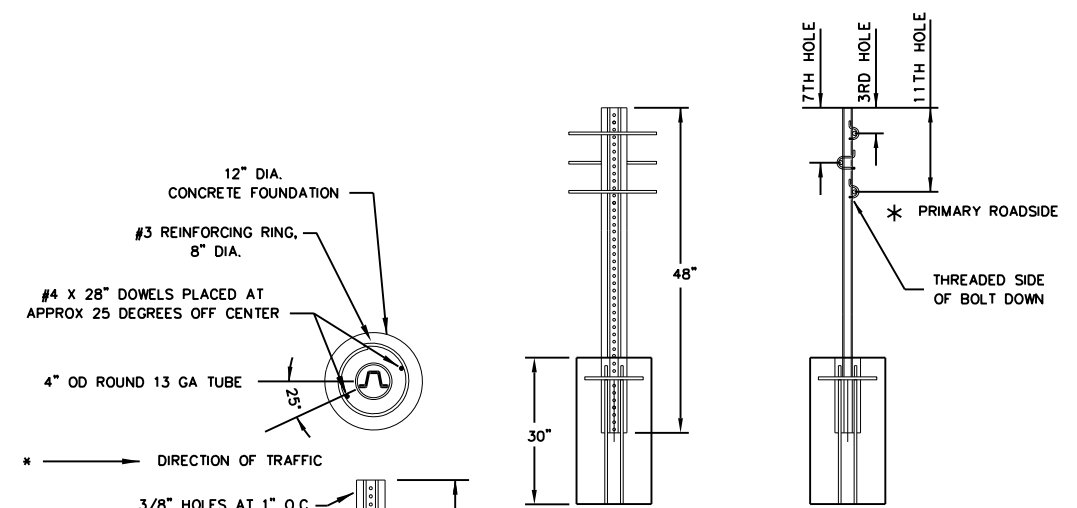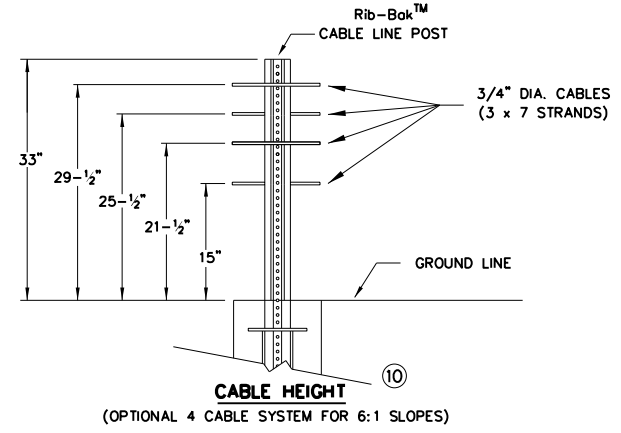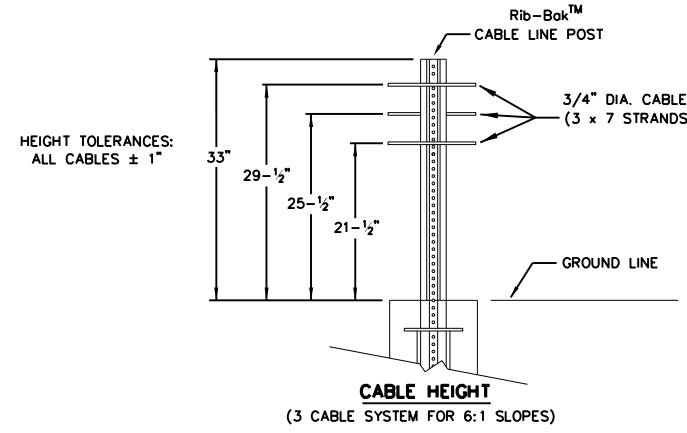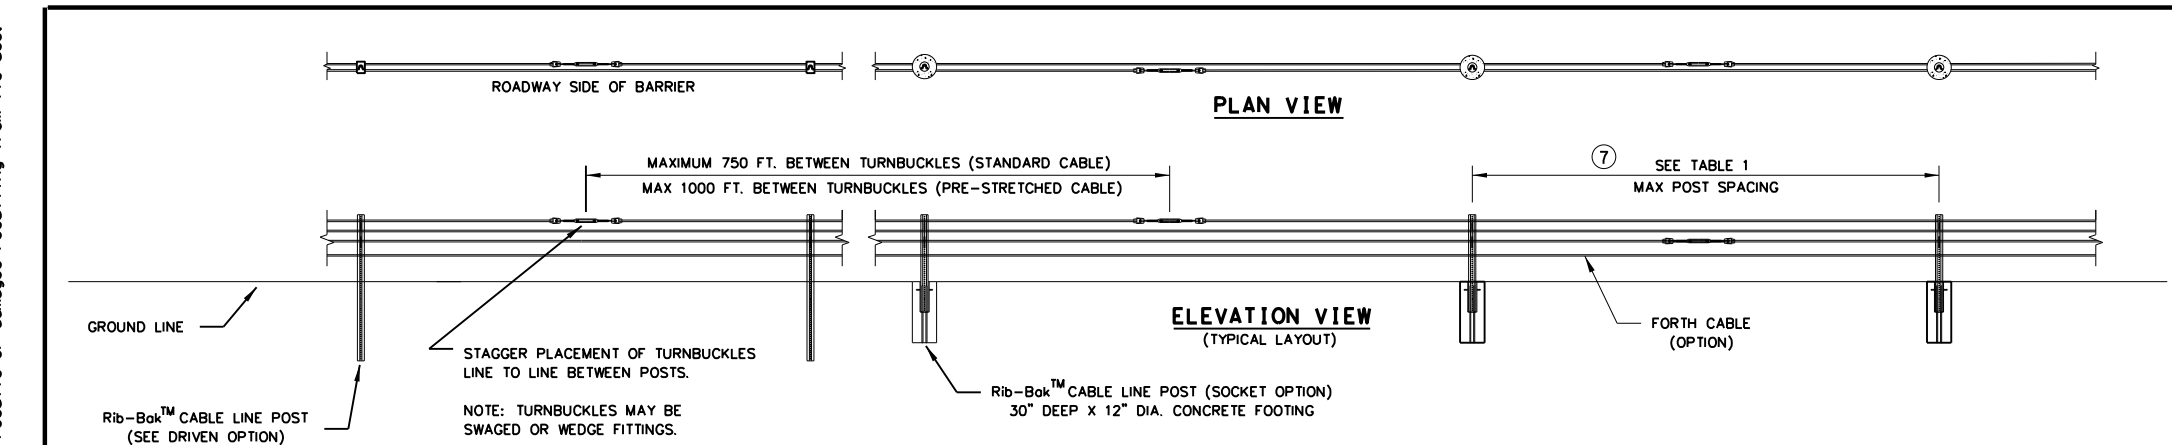

7 TABLE 1

POST SIZE TABLE	
POST SPACING	POST SIZE
0' - 17'-6"	4# / LF X 4' OR 6' POST
17'-6" - 20'	5# / LF X 4' POST





POST SPACING IS PER 8 FOOT DEFLECTION REQUIREMENTS. CONSULT PRODUCT MANUAL IF GREATER DEFLECTION IS PERMISSIBLE.

8 TABLE 2

CABLE TENSION CHART	
INITIAL INSTALL	
F	LBF
120	4624
110	4986
100	5350
90	5713
80	6077
70	6440
60	7167
50	7894
40	8619
30	9346
20	10073
10	10800
0	11525
-10	12252
-20	12979
-30	13706

9 TABLE 3

CABLE TENSION CHART	
MAINTENANCE	
F	LBF
120	4021
110	4336
100	4652
90	4968
80	5284
70	5600
60	6232
50	6864
40	7495
30	8127
20	8759
10	9391
0	10022
-10	10654
-20	11286
-30	11918

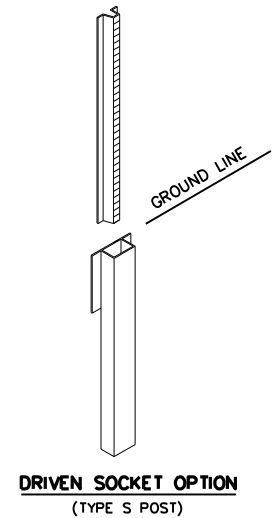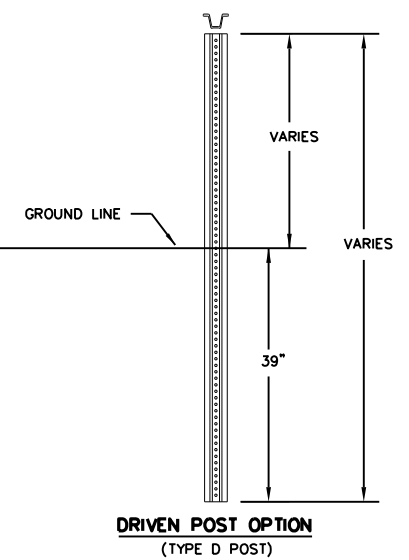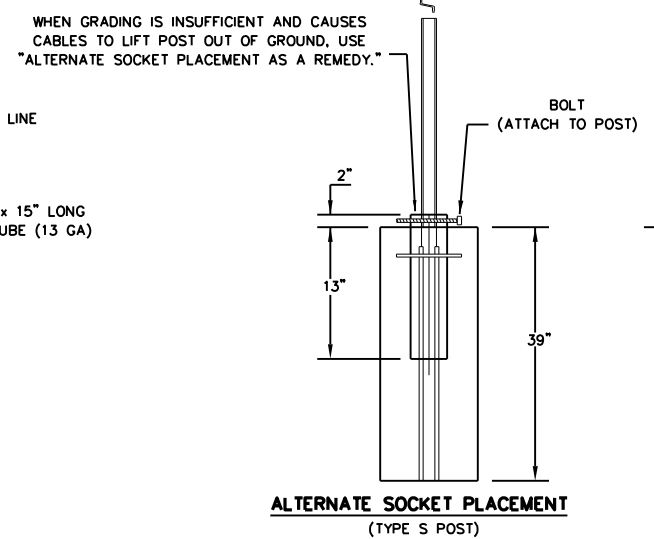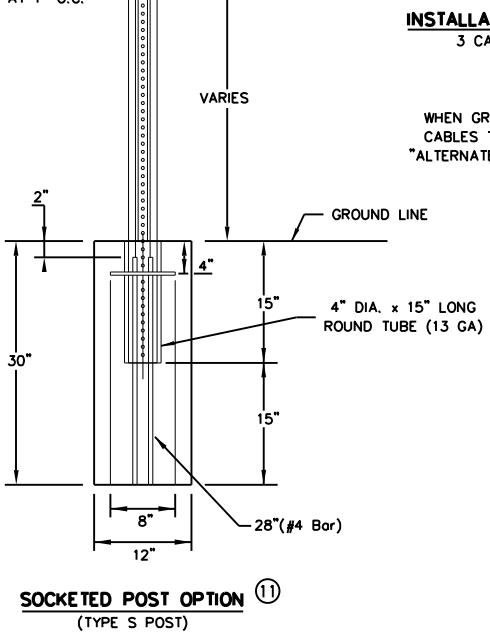

- GENERAL NOTES**
- FOR ADDITIONAL INFORMATION CONTACT YOUR DISTRIBUTOR OR NUCOR STEEL MARION, INC. AT (603) 430-9350.
 - FOR PAYMENT SEE SPECIAL SPECIFICATION "CABLE BARRIER SYSTEM".
 - FOR ADDITIONAL INFORMATION SEE THE MANUFACTURER'S PRODUCT MANUAL.
 - THE NU-CABLE SYSTEM IS DESIGNED FOR BI-DIRECTIONAL TRAFFIC FLOWS. SEE THE MANUFACTURER'S PRODUCT MANUAL FOR PLACEMENT ADJACENT TO GUARDRAIL END TREATMENTS.
 - THE NU-CABLE SYSTEM SHALL BE INSTALLED ON SHOULDERS OR MEDIANS WITH SLOPES OF 6:1 OR FLATTER WITHOUT OBSTRUCTIONS, DEPRESSIONS, ETC. THAT MAY SIGNIFICANTLY AFFECT THE STABILITY OF AN ERRANT VEHICLE.
 - THE NU-CABLE SYSTEM MAY BE INSTALLED ON EITHER SIDE OF THE ROADWAY. Rib-Bok™ CABLE LINE POSTS MAY BE SOCKETED OR DRIVEN DESIGN.
 - THE TL-3 THREE-CABLE AND FOUR-CABLE FOR 6:1 SLOPES CAN USE EITHER A 4# /LF OR 5# /LF POST. SEE TABLE # 1 FOR POST SIZE PER SPACING.
 - SEE (TABLE 2) FOR TENSION AMOUNT AT SPECIFIC CABLE TEMPERATURE FOR INITIAL INSTALLATION.
 - SEE (TABLE 3) FOR TENSION AMOUNT AT SPECIFIC CABLE TEMPERATURE FOR MAINTENANCE.
 - FOURTH (LOWEST) CABLE IS OPTIONAL. SEE PROJECT SPECIFICATIONS FOR REQUIREMENT OF FOURTH CABLE.
 - CONSULT YOUR PROJECT PLAN SHEET AND CABLE BARRIER SPECIFICATIONS FOR DESIRED SOCKET MATERIAL.
 - ALL FOUNDATION DESIGNS ARE BASED ON NCHRP 350 STRONG (S1) SOIL. CONSULT THE MANUFACTURER FOR SPECIFIC FOUNDATION DESIGN IF SOIL TYPES DIFFER.

DATE: FILE:






Texas Department of Transportation Design Division Standard

NU-CABLE BARRIER SYSTEM (TL-3) (3 OR 4 CABLE)

NU-CABLE (TL3) - 14

FILE:	DN:	CK:	DW:	CK:
© TxDOT:	CONT:	SECT:	JOB:	HIGHWAY:
REVISIONS	0265	05	089, ETC	SH 71, ETC
	DIST:	COUNTY:		SHEET NO.
	AUS	BASTROP		48


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

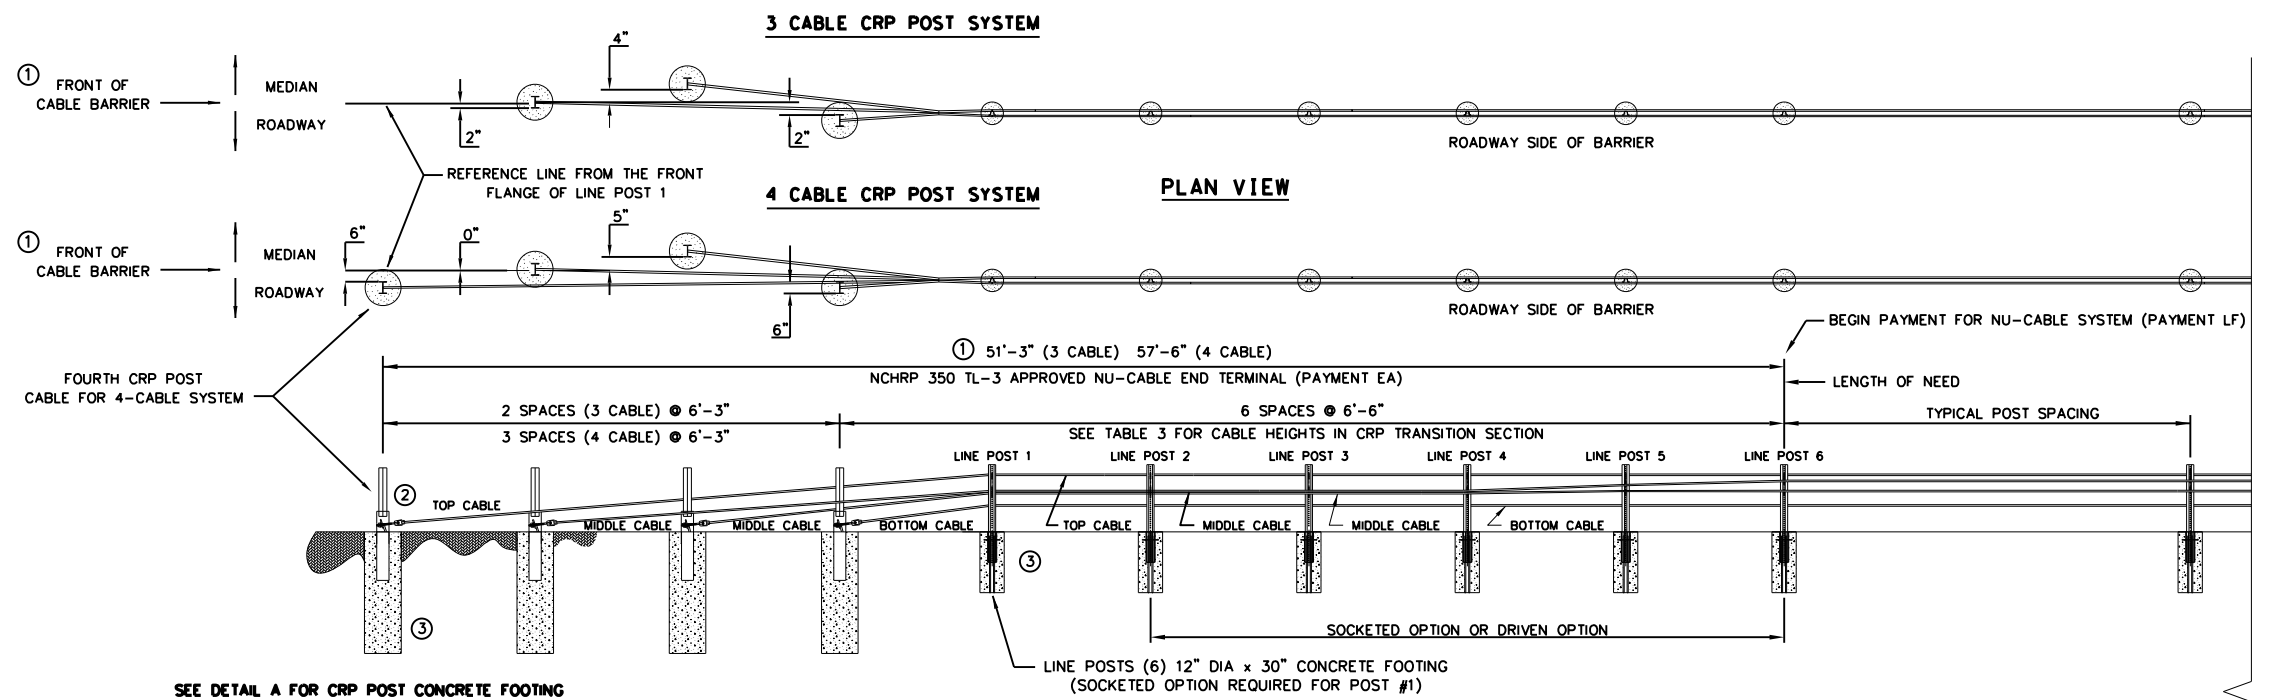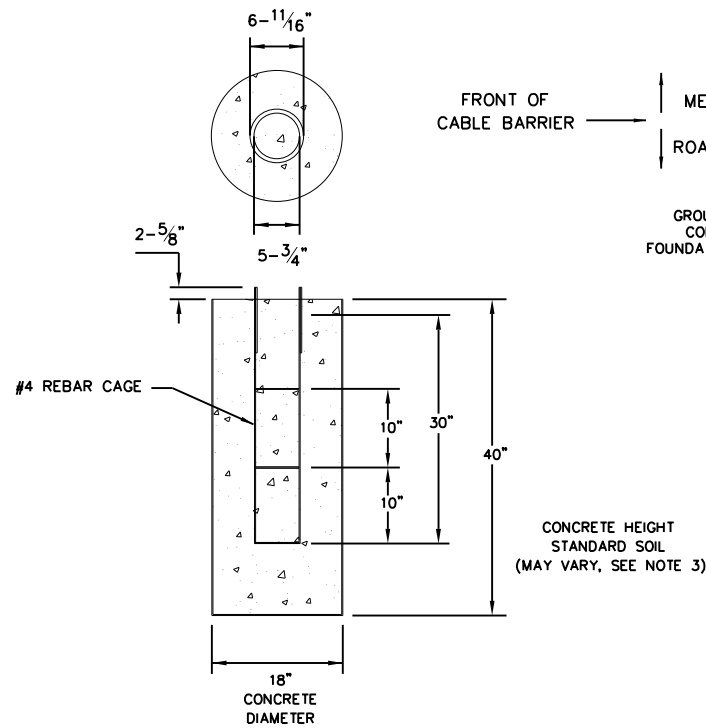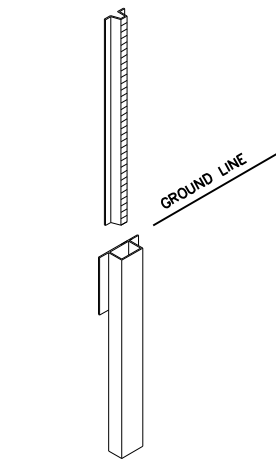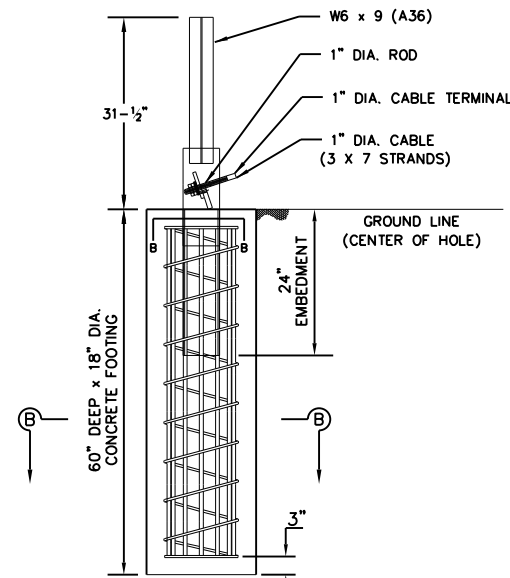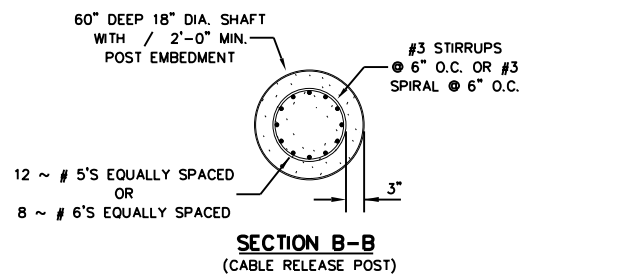

SEE DETAIL A FOR CRP POST CONCRETE FOOTING

CRP POST END TERMINAL SYSTEMS (3 AND 4 CABLE)

ELEVATION VIEW

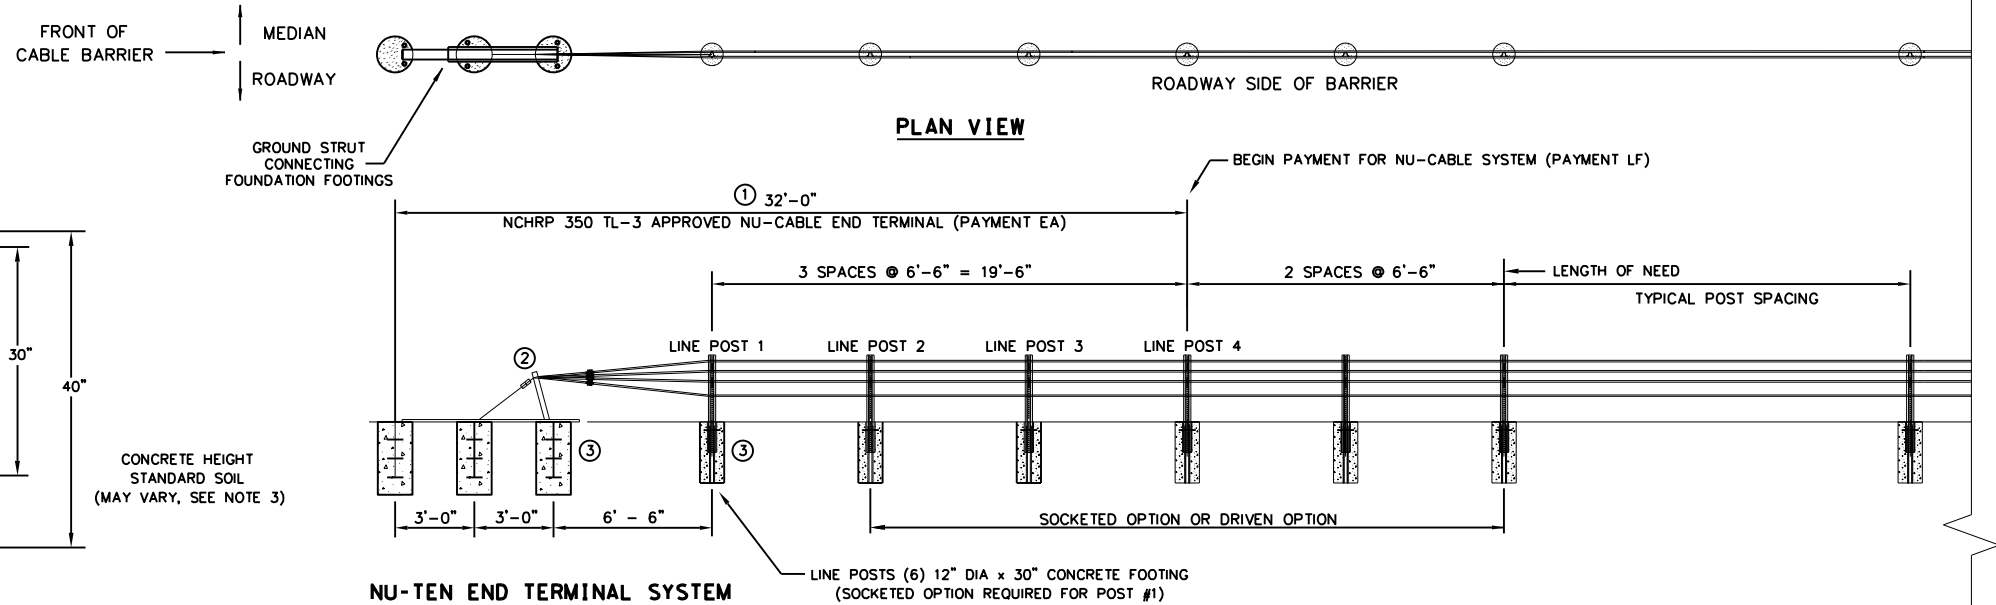

NU-TEN END TERMINAL SYSTEM

ELEVATION VIEW

④ **TABLE 4**

CRP END TERMINAL CABLE HEIGHTS - TL-3- THREE CABLE						
	LP 1	LP 2	LP 3	LP 4	LP 5	LP 6
TOP CABLE	28"	28"	28"	28"	30"	30"
MIDDLE CABLE	22"	22"	22"	23"	25"	25"
BOTTOM CABLE	19"	19"	19"	20"	20"	21"
CRP END TERMINAL CABLE HEIGHTS - TL-3- FOUR CABLE 6:1						
	LP 1	LP 2	LP 3	LP 4	LP 5	LP 6
TOP CABLE	28"	28"	28"	28"	30"	30"
UPPER-MIDDLE CABLE	22"	22"	22"	23"	25"	25"
BOTTOM-MIDDLE CABLE	19"	19"	19"	20"	20"	21"
BOTTOM CABLE	15"	15"	15"	15"	15"	15"

NOTES:

1. THE OPPOSING END TREATMENTS ON A PARTICULAR RUN ARE MIRRORED IN THEIR LAYOUT. SYSTEM PAYMENT IS PER EACH (EA). REFER TO PROJECT SPECIFICATIONS FOR ADDITIONAL PAYMENT INFORMATION.
2. REFER TO INSTALLATION MANUAL FOR CABLE END ASSEMBLY DETAIL.
3. ALL FOUNDATION DESIGNS ARE BASED ON NCHRP 350 STRONG (S1) SOIL. CONSULT THE MANUFACTURER FOR SPECIFIC FOUNDATION DESIGNS IF SOIL TYPES DIFFER.
4. SEE TABLE 2 CABLE HEIGHTS IN CRP TRANSITION SECTION.

REFER TO SHEET 1 OF 2 FOR LENGTH OF NEED CABLE HEIGHTS.

Texas Department of Transportation
Design Division Standard

NU-CABLE BARRIER SYSTEM (TL-3) (3 OR 4 CABLE)








NU-CABLE (TL3) - 14

FILE:	DN:	CK:	DW:	CK:
© TxDOT:	CONT:	SECT:	JOB:	HIGHWAY:
REVISIONS	0265	05	089, ETC	SH 71, ETC
	DIST:	COUNTY:	SHEET NO.	
	AUS	BASTROP	48A	

DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

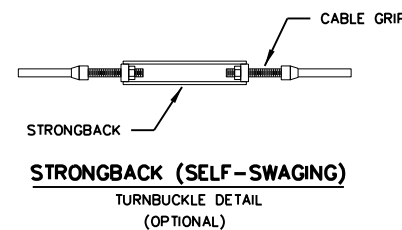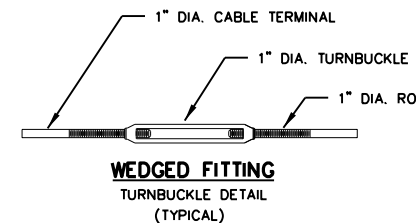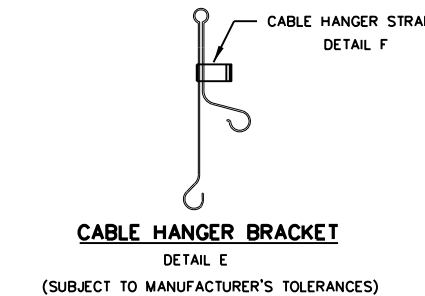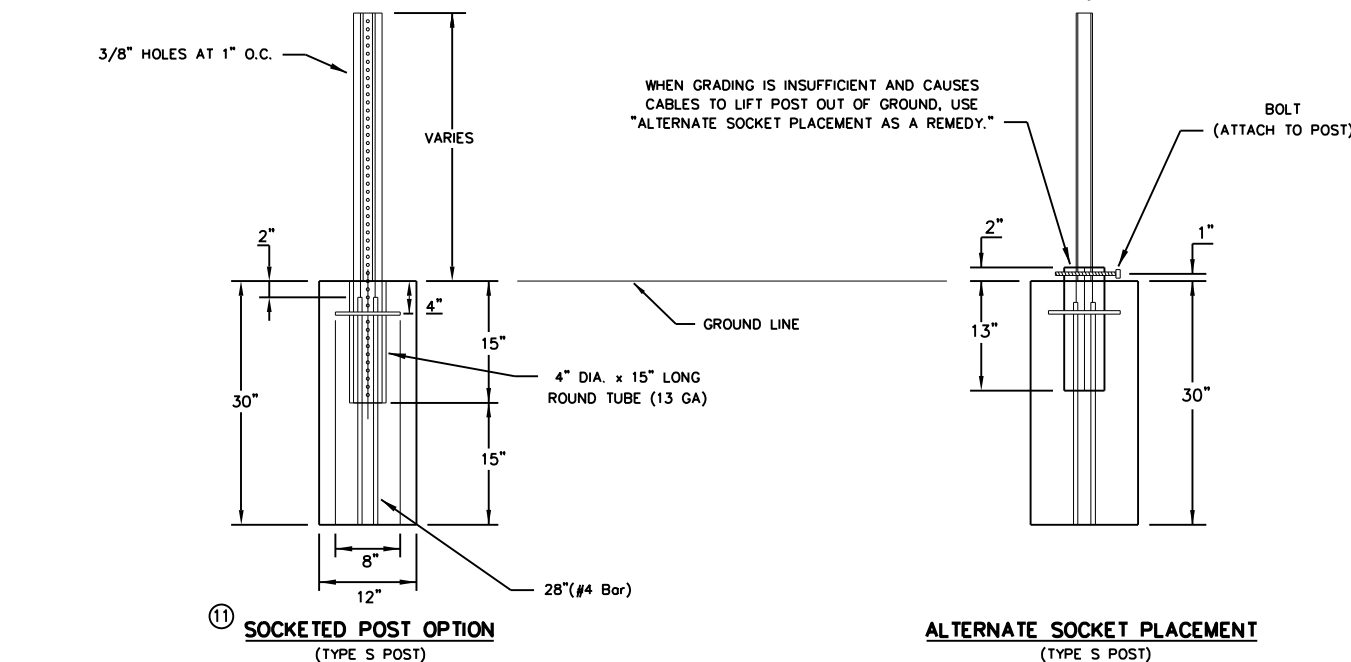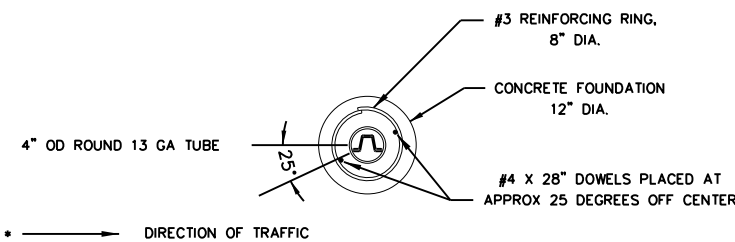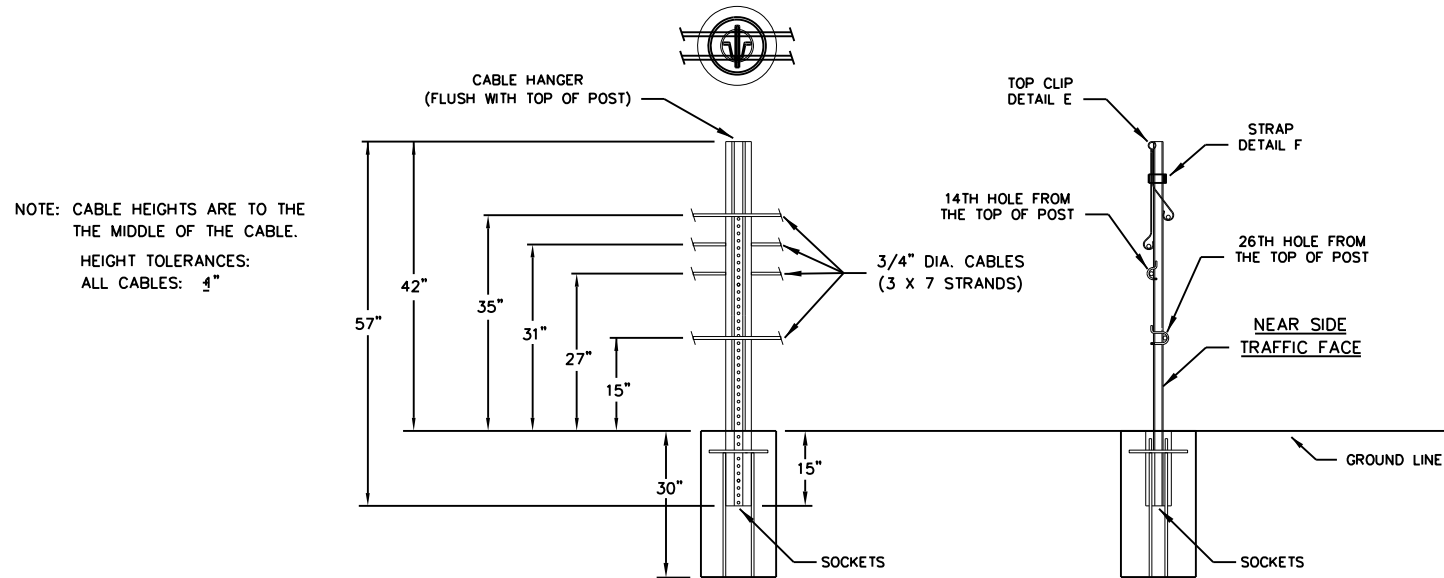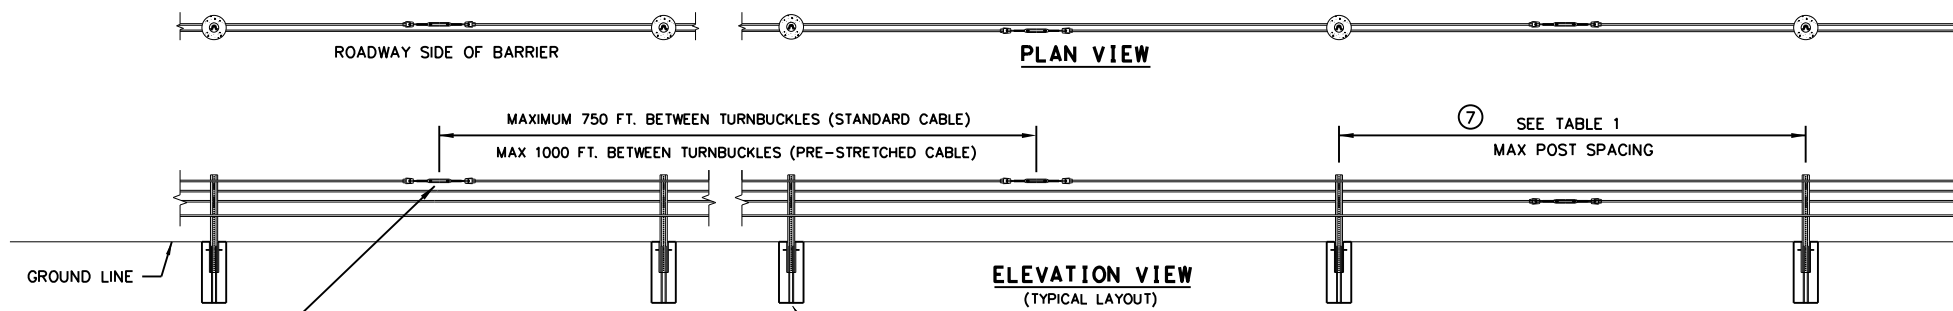

GENERAL NOTES

- FOR ADDITIONAL INFORMATION CONTACT YOUR DISTRIBUTOR OR NUCOR STEEL MARION, INC. AT (740) 383-4011.
- FOR PAYMENT SEE SPECIAL SPECIFICATION "CABLE BARRIER SYSTEM".
- FOR ADDITIONAL INFORMATION SEE THE MANUFACTURER'S PRODUCT MANUAL.
- THE NU-CABLE SYSTEM IS DESIGNED FOR BI-DIRECTIONAL TRAFFIC FLOWS. SEE THE MANUFACTURER'S PRODUCT MANUAL FOR PLACEMENT ADJACENT TO GUARDRAIL END TREATMENTS.
- THE NU-CABLE SYSTEM SHALL BE INSTALLED ON MEDIANS WITH SLOPES OF 6:1 OR FLATTER WITHOUT OBSTRUCTIONS, DEPRESSIONS, ETC; THAT MAY SIGNIFICANTLY AFFECT THE STABILITY OF AN ERRANT VEHICLE.
- THE NU-CABLE SYSTEM MAY BE INSTALLED ON EITHER SIDE OF THE ROADWAY. Rib-Bak™ CABLE LINE POSTS MAY BE SOCKETED OR DRIVEN DESIGN.
- THE TL-4 FOR 6:1 SLOPES CAN USE 4# / LF POST. SEE TABLE #1 FOR POST SIZE PER SPACING.
- SEE (TABLE 2) FOR TENSION AMOUNT AT SPECIFIC CABLE TEMPERATURE FOR INITIAL INSTALLATION.
- SEE (TABLE 3) FOR TENSION AMOUNT AT SPECIFIC CABLE TEMPERATURE FOR MAINTENANCE.
- FOURTH (LOWEST) CABLE IS NOT OPTIONAL ON THE TL-4 SYSTEM.
- CONSULT YOUR PROJECT PLAN SHEETS AND CABLE BARRIER SPECIFICATIONS FOR DESIRED SOCKET MATERIAL.
- ALL FOUNDATION DESIGNS ARE BASED ON NCHRP 350 STRONG (S1) SOIL. CONSULT THE MANUFACTURER FOR SPECIFIC FOUNDATION DESIGN IF SOIL TYPES DIFFER.

⑦ **TABLE 1**

POST SIZE TABLE	
POST SPACING	POST SIZE
0' - 17'-6"	4# / LF X 4' OR 6' POST
17'-6" - 20'	5# / LF X 4' POST

POST SPACING IS PER 8 FOOT DEFLECTION REQUIREMENTS. CONSULT PRODUCT MANUAL IF GREATER DEFLECTION IS PERMISSIBLE.

⑧ **TABLE 2**

CABLE TENSION CHART	
INITIAL INSTALL	
F	LBF
120	4624
110	4986
100	5350
90	5713
80	6077
70	6440
60	7167
50	7894
40	8619
30	9346
20	10073
10	10800
0	11525
-10	12252
-20	12979
-30	13706

⑨ **TABLE 3**

CABLE TENSION CHART	
MAINTENANCE	
F	LBF
120	4021
110	4336
100	4652
90	4968
80	5284
70	5600
60	6232
50	6864
40	7495
30	8127
20	8759
10	9391
0	10022
-10	10654
-20	11286
-30	11918

SHEET 1 OF 2


Texas Department of Transportation
Design Division Standard

NU-CABLE BARRIER SYSTEM (TL-4) (4 CABLE)


NU-CABLE (TL4) - 14

FILE:	DN:	CK:	DW:	CK:
© TxDOT:	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
	DIST	COUNTY		SHEET NO.
	AUS	BASTROP		49

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

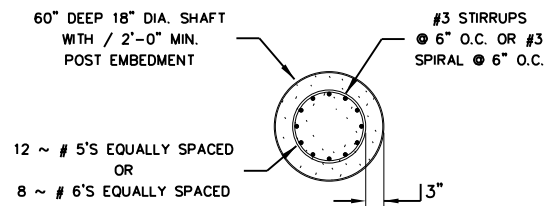

SECTION B-B (CABLE RELEASE POST)

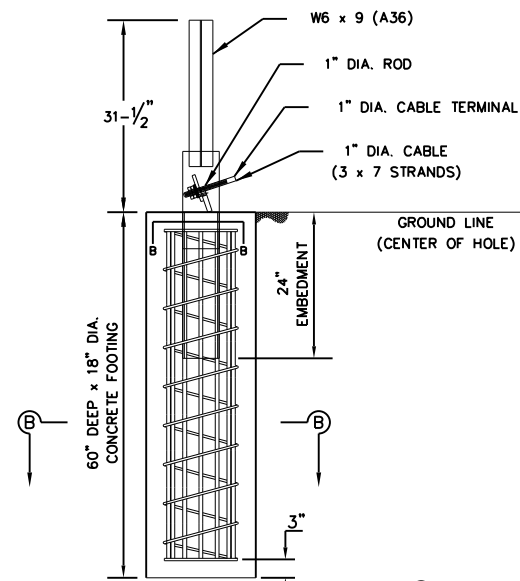

DETAIL A - CRP IN CONCRETE FOOTING (3000 PSI MIN CONCRETE)




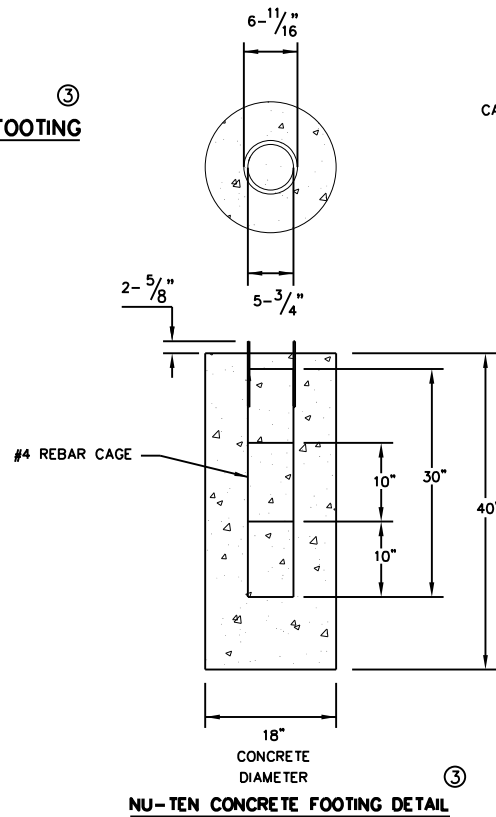


TABLE 4

CRP END TERMINAL CABLE HEIGHTS - TL-4						
	LP 1	LP 2	LP 3	LP 4	LP 5	LP 6
TOP CABLE	34"	34"	34"	34"	34"	34"
UPPER-MIDDLE CABLE	27"	27"	27"	27"	28"	31"
BOTTOM-MIDDLE CABLE	24"	24"	24"	24"	24"	24"
BOTTOM CABLE	15"	15"	15"	15"	15"	15"

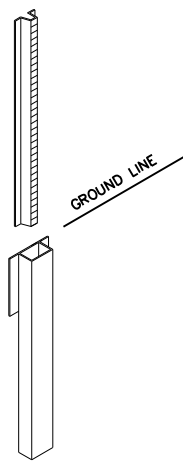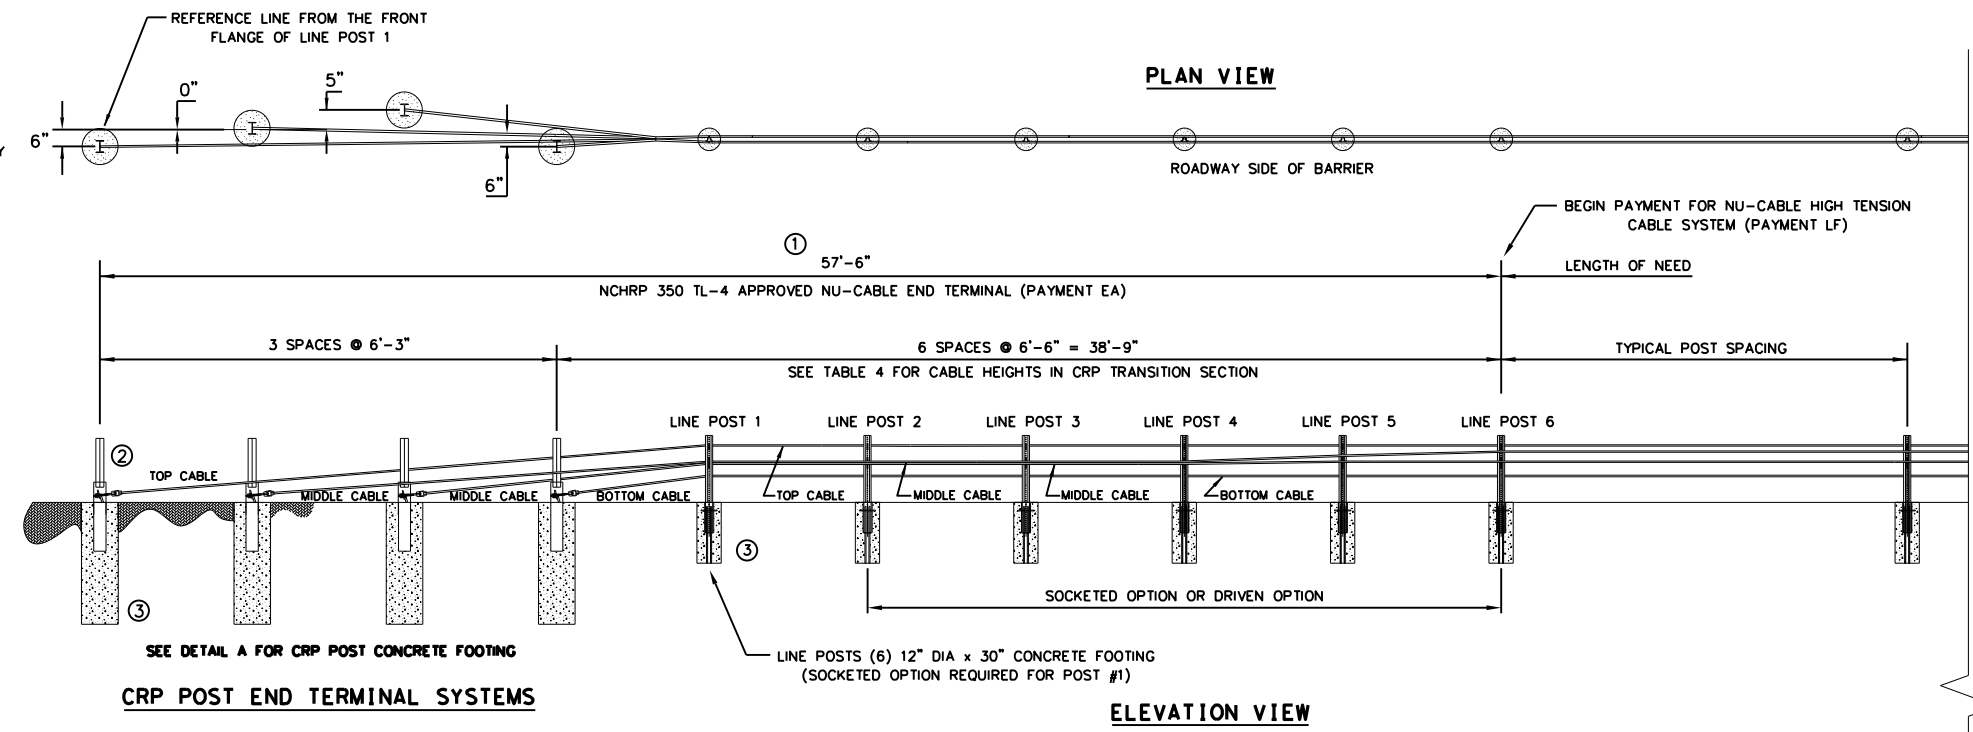

① THE OPPOSING END TREATMENTS ON A PARTICULAR RUN ARE MIRRORED IN THEIR LAYOUT.

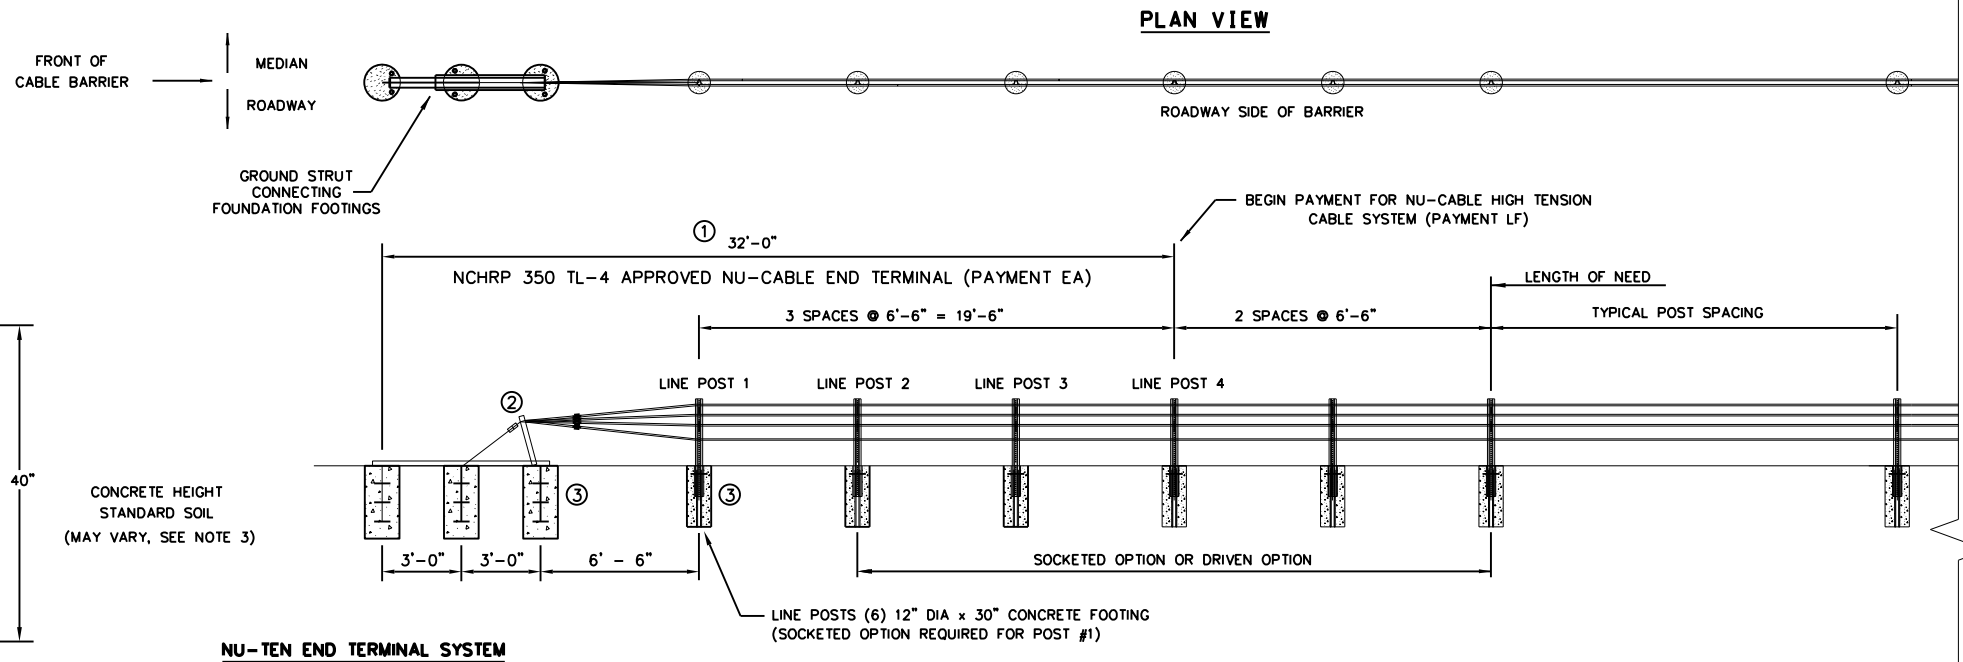

NOTES

1. THE OPPOSING END TREATMENTS ON A PARTICULAR RUN ARE MIRRORED IN THEIR LAYOUT. SYSTEM PAYMENT IS PER EACH (EA). REFER TO PROJECT SPECIFICATIONS FOR ADDITIONAL PAYMENT INFORMATION
2. REFER TO INSTALLATION MANUAL FOR CABLE END ASSEMBLY DETAIL.
3. ALL FOUNDATION DESIGNS ARE BASED ON NCHRP 350 STRONG (S1) SOIL. CONSULT THE MANUFACTURER FOR SPECIFIC FOUNDATION DESIGNS IF SOIL TYPES DIFFER.
4. SEE TABLE 4 CABLE HEIGHTS IN CRP TRANSITION SECTION.

SHEET 2 OF 2

Texas Department of Transportation
Design Division Standard

NU-CABLE BARRIER SYSTEM (TL-4) (4 CABLE)

NU-CABLE (TL4) - 14

FILE:	DN:	CK:	DW:	CK:
© TxDOT:	CONT:	SECT:	JOB:	HIGHWAY:
REVISIONS	0265	05	089, ETC	SH 71, ETC
	DIST:	COUNTY:	SHEET NO.	
	AUS	BASTROP	49A	




DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

REQUIREMENTS FOR INDEPENDENT MOUNTED ROUTE SIGNS



SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE A SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & BORDERS	ALL OTHERS	TYPE B or C SHEETING

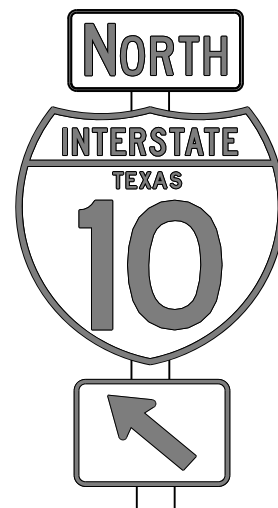

TYPICAL EXAMPLES

REQUIREMENTS FOR BLUE, BROWN & GREEN D AND I SERIES GUIDE SIGNS

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	ALL	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE D SHEETING
LEGEND, SYMBOLS & BORDERS	ALL OTHERS	TYPE B OR C SHEETING

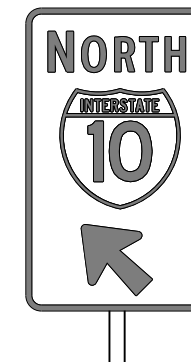

TYPICAL EXAMPLES

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- White legend shall use the Clearview Alphabet. The following Clearview fonts shall be used to replace the existing white Federal Highway Administration (FHWA) Standard Highway Alphabets, when not specified in the SHSD, or in the plans.

B	CV-1W
C	CV-2W
D	CV-3W
E	CV-4W
Emod	CV-5WR
F	CV-6W

- Route sign legend (ie. IH, US, SH and FM shields) shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Independent mounted route sign with white or colored legend and borders shall be applied by screening process with transparent color ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof. White legend, symbols and borders on all other signs shall be cut-out white sheeting applied to colored background sheeting.
- Information regarding borders and radii for signs is found in the "Standard Highway Sign Designs for Texas". Dimensions shown and described for borders and corner radii on parent sign are nominal. Borders may vary in width as much as 1/2 inch. Corner radii above 3 inches may vary in width as much as 1 inch. Borders and corner radii within a parent sign must be of matching widths. The sign area outside the corner radius should be trimmed or rounded.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details of roadside signs are shown in the "SMD series" Standard Plan Sheets.

DEPARTMENTAL MATERIAL SPECIFICATIONS	
ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.

<http://www.txdot.gov/>


Texas Department of Transportation		<i>Traffic Operations Division Standard</i>
<h2 style="margin: 0;">TYPICAL SIGN REQUIREMENTS</h2> <h3 style="margin: 0;">TSR(3) - 13</h3>		
FILE: tsr3-13.dgn	DN: TxDOT	CK: TxDOT
© TxDOT October 2003	CON: TxDOT	SECT: TxDOT
REVISIONS	JOB: 0265 05	HIGHWAY: 089, ETC
12-03 7-13	DIST: AUS	COUNTY: BASTROP
9-08	SHEET NO.:	50

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

REQUIREMENTS FOR RED BACKGROUND REGULATORY SIGNS

(STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)

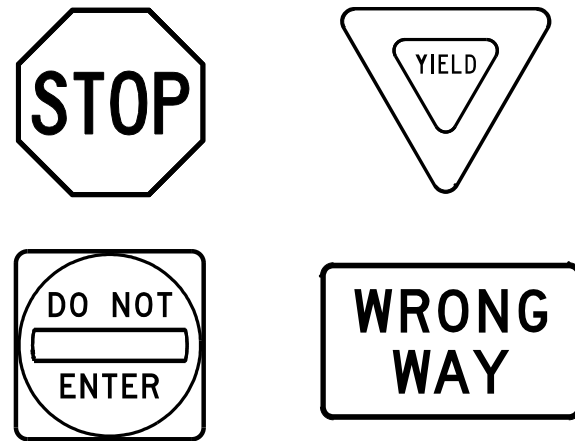


REQUIREMENTS FOR FOUR SPECIFIC SIGNS ONLY

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	WHITE	TYPE B OR C SHEETING
LEGEND & BORDERS	WHITE	TYPE B OR C SHEETING
LEGEND	RED	TYPE B OR C SHEETING

REQUIREMENTS FOR WHITE BACKGROUND REGULATORY SIGNS


(EXCLUDING STOP, YIELD, DO NOT ENTER AND WRONG WAY SIGNS)

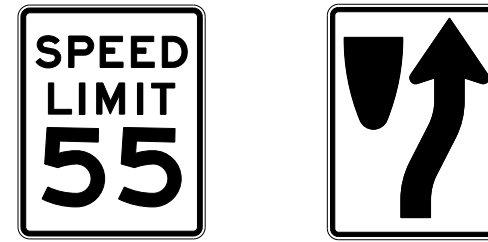

TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	ALL OTHERS	TYPE B OR C SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND, BORDERS AND SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

REQUIREMENTS FOR WARNING SIGNS

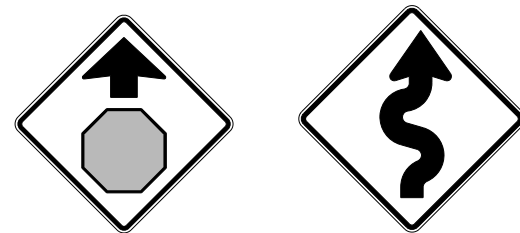

TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	FLOURESCENT YELLOW	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDERS	BLACK	ACRYLIC NON-REFLECTIVE FILM
LEGEND & SYMBOLS	ALL OTHER	TYPE B OR C SHEETING

REQUIREMENTS FOR SCHOOL SIGNS



TYPICAL EXAMPLES

SHEETING REQUIREMENTS		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	WHITE	TYPE A SHEETING
BACKGROUND	FLOURESCENT YELLOW GREEN	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND, BORDERS AND SYMBOLS	BLACK	ACRYLIC NON-REFLECTIVE FILM
SYMBOLS	RED	TYPE B OR C SHEETING

GENERAL NOTES

- Signs to be furnished shall be as detailed elsewhere in the plans and/or as shown on sign tabulation sheet. Standard sign designs and arrow dimensions can be found in the "Standard Highway Sign Designs for Texas" (SHSD).
- Sign legend shall use the Federal Highway Administration (FHWA) Standard Highway Alphabets (B, C, D, E, Emod or F).
- Lateral spacing between letters and numerals shall conform with the SHSD, and any approved changes thereto. Lateral spacing of legend shall provide a balanced appearance when spacing is not shown.
- Black legend and borders shall be applied by screening process or cut-out acrylic non-reflective black film to background sheeting, or combination thereof.
- White legend and borders shall be applied by screening process with transparent colored ink, transparent colored overlay film to white background sheeting or cut-out white sheeting to colored background sheeting, or combination thereof.
- Colored legend shall be applied by screening process with transparent colored ink, transparent colored overlay film or colored sheeting to background sheeting, or combination thereof.
- Sign substrate shall be any material that meets the Departmental Material Specification requirements of DMS-7110 or approved alternative.
- Mounting details for roadside mounted signs are shown in the "SMD series" Standard Plan Sheets.

ALUMINUM SIGN BLANKS THICKNESS

Square Feet	Minimum Thickness
Less than 7.5	0.080
7.5 to 15	0.100
Greater than 15	0.125

DEPARTMENTAL MATERIAL SPECIFICATIONS

ALUMINUM SIGN BLANKS	DMS-7110
SIGN FACE MATERIALS	DMS-8300

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.

<http://www.txdot.gov/>



TYPICAL SIGN REQUIREMENTS


TSR(4) - 13

FILE:	tsr4-13.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
©TxDOT	October 2003	CONT	SECT	JOB	HIGHWAY				
REVISIONS	0265 05	089, ETC	SH 71, ETC						
12-03 7-13	DIST	COUNTY	SHEET NO.						
9-08	AUS	BASTROP	51						


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

ARROW DETAILS


for Large Ground-Mounted and Overhead Guide Signs




Type A




Type B



E-3



E-4



Down Arrow

TYPE	LETTER SIZE	USE
A-1	10.67" U/L and 10" Caps	Single Lane Exits
A-2	13.33" U/L and 12" Caps	
A-3	16" & 20" U/L	
B-1	10.67" U/L and 10" Caps	Multiple Lane Exits
B-2	13.33" U/L and 12" Caps	
B-3	16" & 20" U/L	

CODE	USED ON SIGN NO.
E-3	E5-1aT
E-4	E5-1bT


NOTE

Arrow dimensions are shown in the "Standard Highway Sign Designs for Texas" manual.

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website.


<http://www.txdot.gov/>

SIGN BLANK PUNCHING DETAILS FOR ATTACHMENTS WHEN SPECIFIED TO BE TYPE A ALUMINUM SIGNS (FOR MOUNTING TO GUIDE SIGN FACE)

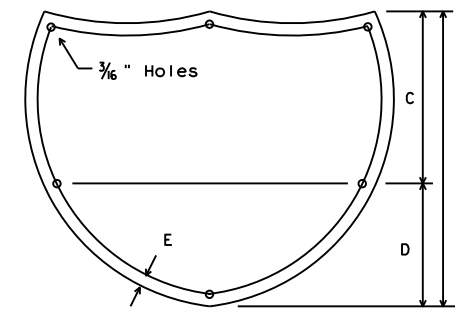


INTERSTATE ROUTE MARKERS

A	C	D	E
36	21	15	1 1/2
48	28	20	1 3/4

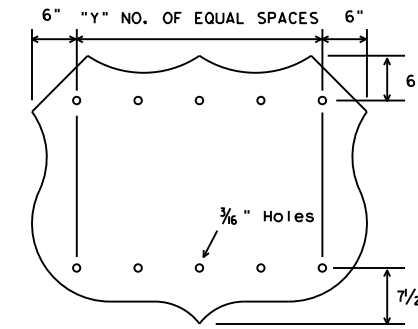


U.S. ROUTE MARKERS

Sign Size	"Y"
24x24	2
30x24	3
36x36	3
45x36	4
48x48	4
60x48	5

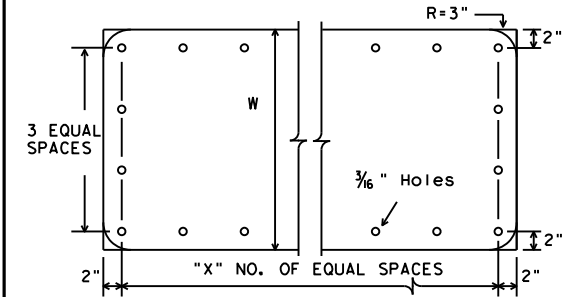


STATE ROUTE MARKERS

No. of Digits	W	X
4	24	4
4	36	5
4	48	6
3	24	3
3	36	4
3	48	5

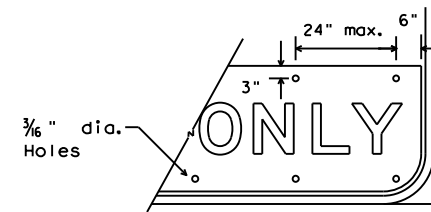

EXIT ONLY PANEL


MOUNTING DETAILS OF ATTACHMENTS TO GUIDE SIGN FACE ("EXIT ONLY" AND "LEFT EXIT" PANELS, ROUTE MARKERS AND OTHER ATTACHMENTS)

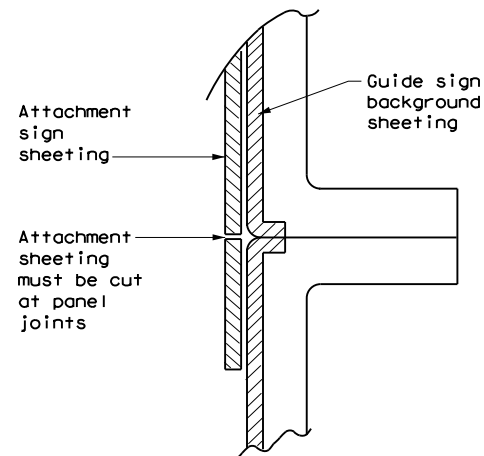


DIRECT APPLIED ATTACHMENT

NOTE:

- Sheeting for legend, symbols, and borders must be cut at panel joints.
- Direct applied attachment signs will be subsidiary to "Aluminum Signs" or "Fiberglass Signs".

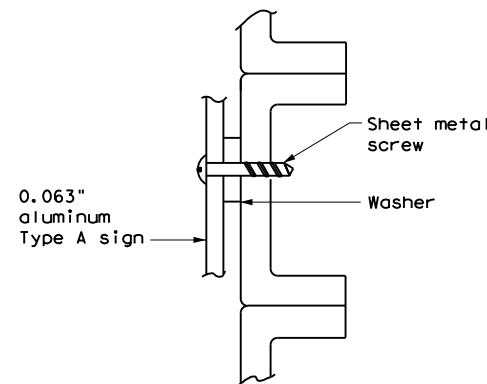

SCREW ATTACHMENT

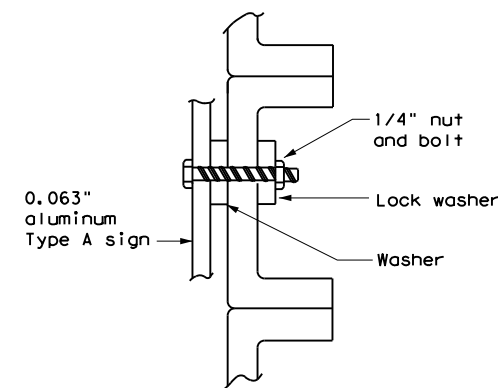


NUT/BOLT ATTACHMENT


NOTE:

Furnish Type A aluminum sign attachments only when specified in the plans. These signs will be paid for under "Aluminum Signs".

ARROW DETAILS for Destination Signs (Type D)



Standard arrow to be used with 6 inch letters.

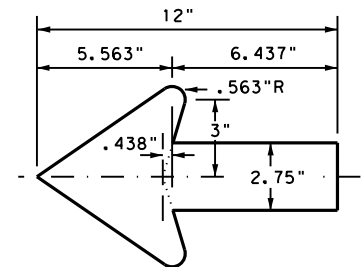

Standard arrow to be used with 8 inch letters.




TYPICAL SIGN REQUIREMENTS

TSR (5) - 13

FILE: tsr5-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT October 2003	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265 05	089, ETC	SH 71, ETC	
12-03 7-13	DIST	COUNTY	SHEET NO.	
9-08	AUS	BASTROP	52	

DATE:
FILE:

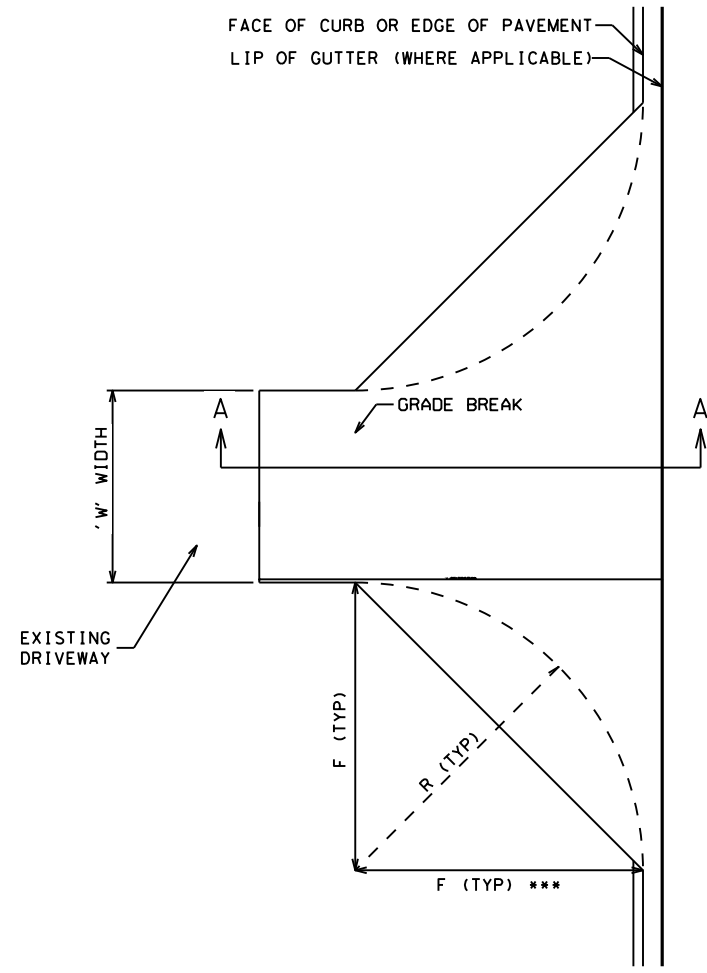


DRIVEWAY PLAN

FLARE OR RADIUS	FARM/RANCH	RESIDENTIAL	COMMERCIAL
"F" OR "R" (FT)	25	25	25

THESE ARE STANDARD DIMENSIONS UNLESS OTHERWISE SHOWN ELSEWHERE ON THE PLANS.

FLARES ARE TYPICALLY USED FOR SUBURBAN/URBAN (CURBED) ROADWAYS. RADII ARE TYPICALLY USED FOR RURAL OR UNCURBED ROADWAYS.


*** THIS 'F' DIMENSION MAY BE REDUCED TO KEEP WORK WITHIN THE ROW.

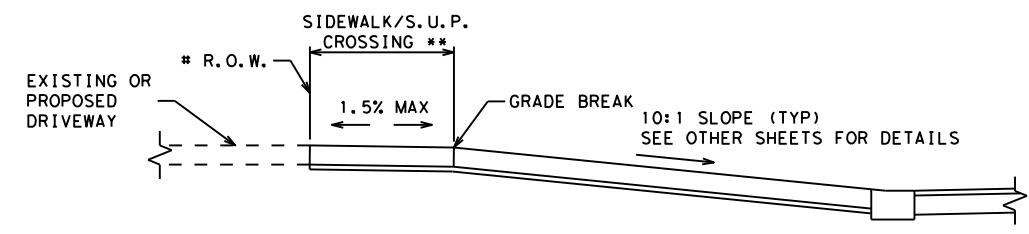


DRIVEWAY WITH GUTTER SECTION A-A

ENSURE GRADE BREAK DOES NOT EXCEED 8% UNLESS OTHERWISE DIRECTED. PROVIDE ABSOLUTE MINIMUM SIDEWALK CROSSING WIDTH OF 4' FOR DRIVEWAYS WIDTH OF 20' OR LESS


** LOCATE SIDEWALK CROSSING TO ALIGN WITH ADJACENT SIDEWALK; SIDEWALK/S.U.P. WIDTH AND LOCATION SHOWN ELSEWHERE ON THE PLANS.

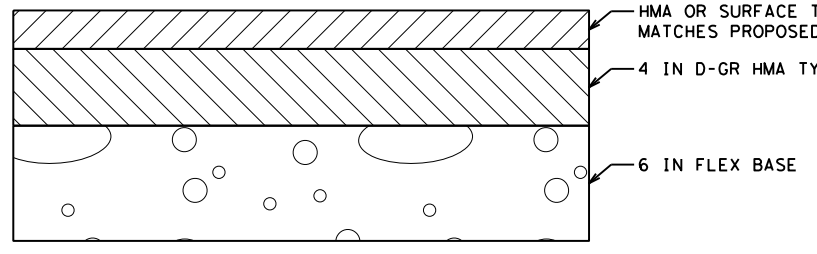


HMA OR SURFACE TREATMENT - COMMERCIAL

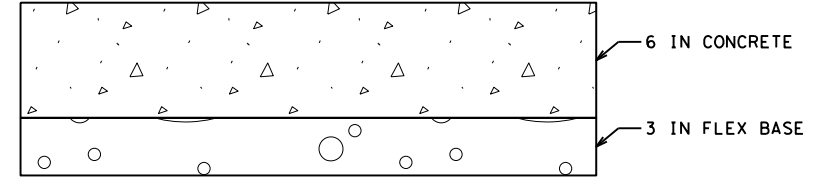

CONCRETE - ALL DRIVEWAY TYPES

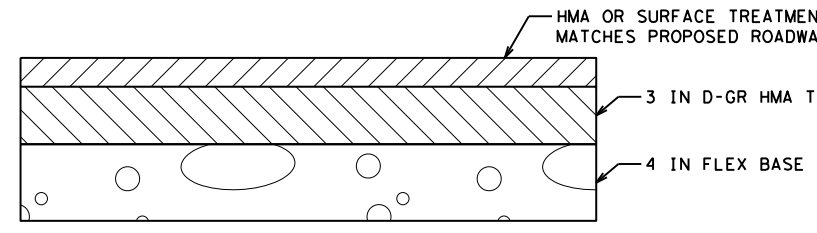


HMA OR SURFACE TREATMENT - FARM/RANCH/RESIDENTIAL




FAST TRACK ACP (TYPE 3) OR CONCRETE


DRIVEWAY AND TURNOUT TYPICAL SECTIONS

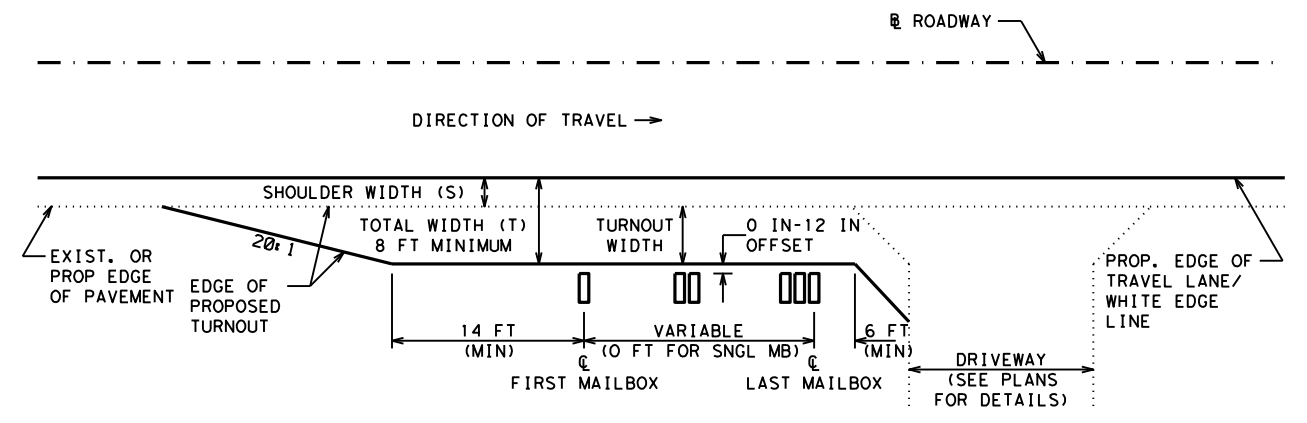

MAILBOX TURNOUT PLAN WITH DRIVEWAY

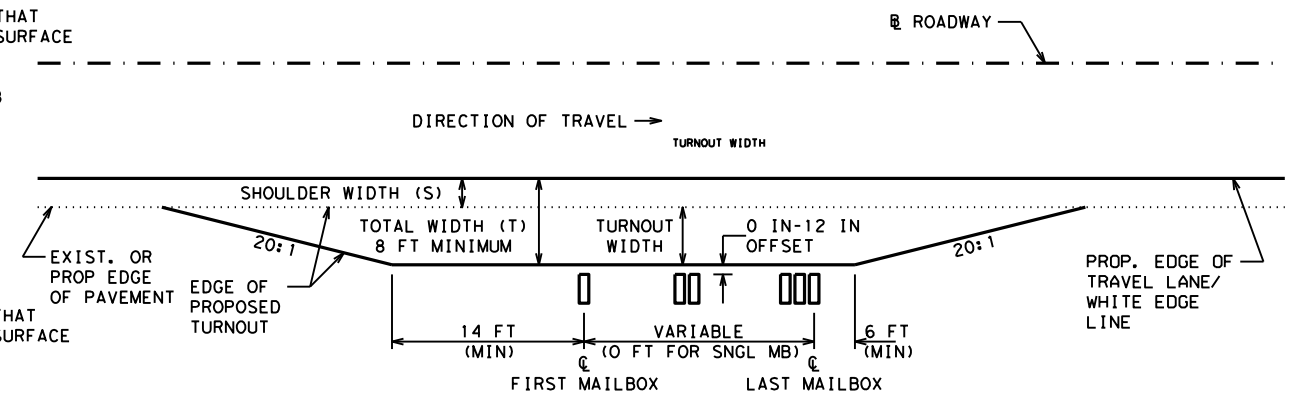

MAILBOX TURNOUT PLAN WITHOUT DRIVEWAY

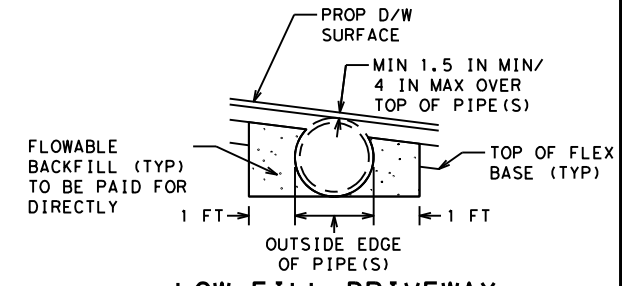

LOW FILL DRIVEWAY

ONLY ONE PIPE SHOWN SEE ELSEWHERE ON THE PLANS FOR SPECIFIC DRIVEWAY DETAILS

GENERAL NOTES

PROVIDE EXPANSION 20 FT C-C FOR WIDTH OR LENGTH OVER 25 FT. EXPANSION JOINT PER AUS STANDARD FOR SIDEWALK (MCPSSWD).

REINFORCEMENT WILL BE IN ACCORDANCE WITH ITEM 432.3.1 USING NO. 3 OR NO. 4 BARS.

FIBER REINFORCEMENT IS NOT ALLOWED. CLASS A CONCRETE IS ALLOWED TO USE COARSE AGGREGATE GRADES 1-8.

IN LIEU OF PFC OR TOM, SURFACE MUST BE 1.5" D-GR HMA TY D. IF SURFACE IS A MULTIPLE COURSE SURFACE TREATMENT, ALL COURSES MUST BE PLACED ON DRIVEWAY. SURFACE HMA IS PG 76-22. NON SURFACE HMA IS PG 64-22 AND MAY BE BLADE LAID.

FURNISH BASE MEETING THE REQUIREMENTS FOR ANY TYPE OR GRADE IN ACCORDANCE WITH ITEM 247. BASE COMPRESSIVE STRENGTHS ARE WAIVED.

THE BASE UNDER THE CONCRETE MAY BE REPLACED WITH CONCRETE AT A RATIO OF 3 INCHES OF BASE EQUALS 2 INCHES OF CONCRETE.

FAST TRACK DRIVEWAYS MUST BE CLOSED, CONSTRUCTED, AND REOPENED WITHIN 24 HOURS.

IF ROOTS ARE ENCOUNTERED VERIFY WITH THE ENGINEER PRIOR TO ACCOMMODATING OR REMOVING 2 IN. DIAMETER OR LARGER ROOTS. ROOT REMOVAL MUST BE IN ACCORDANCE WITH ITEM 752.4.2. ROOTS MAY REMAIN IN THE BASE. FOR IMPROVEMENTS WITHIN 6 IN. OF A ROOT, THE CONCRETE THICKNESS MAY BE REDUCED BY 1 IN. AND THE BASE INCREASED BY 1 IN. TO MINIMIZE IMPACTS TO THE ROOTS. ADJUST BASE AND SURFACE PROFILE TO PROVIDE A 1 IN. BASE CUSHION AROUND THE ROOTS. THE SURFACE PROFILE MAY BE ADJUSTED TO THE EXTENT ALLOWED BY ADA. THIS WORK IS SUBSIDIARY.

Texas Department of Transportation Austin District Standard

DRIVEWAYS AND MAILBOX TURNOUTS

DWMB-22 (AUS)



DATE: \$DATE\$ FILE: \$FILE\$	\$TIME\$	CONT	SECT	JOB	HIGHWAY
		265	05	089, ETC	SH 71, ETC
		DIST	COUNTY		SHEET NO.
		AUS	BASTROP		53

REVISIONS



01/16/16 SHEET CREATED	
04/19/16 APPROVED	
11/20/16 TABLE REVISED, GN ADDED, PLAN & PROFILE MODIFIED	
01/22/17 ADDED TURNOUT INFO	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TYPE 1 - MULTIPLE

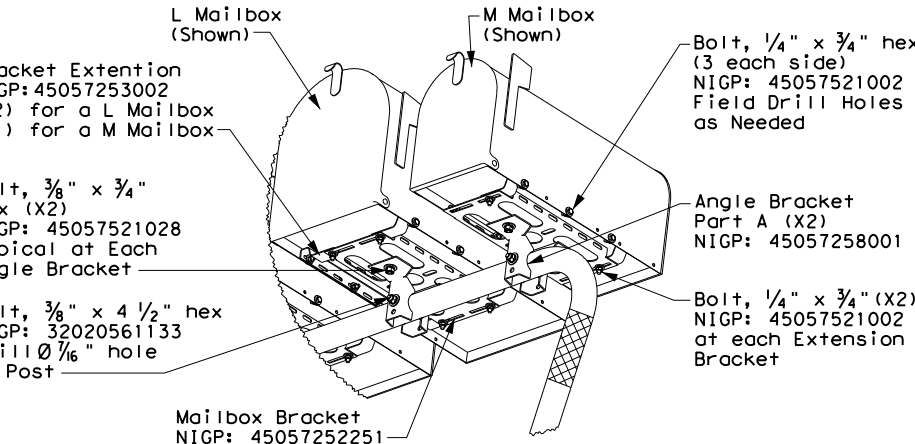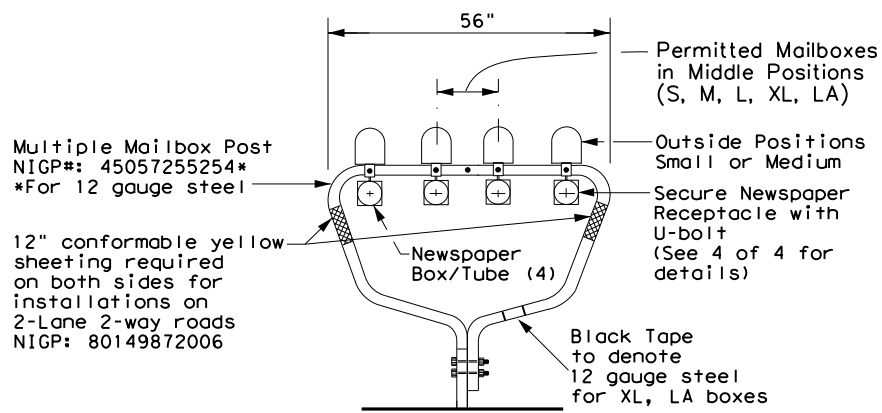

TYPE 4 - MULTIPLE

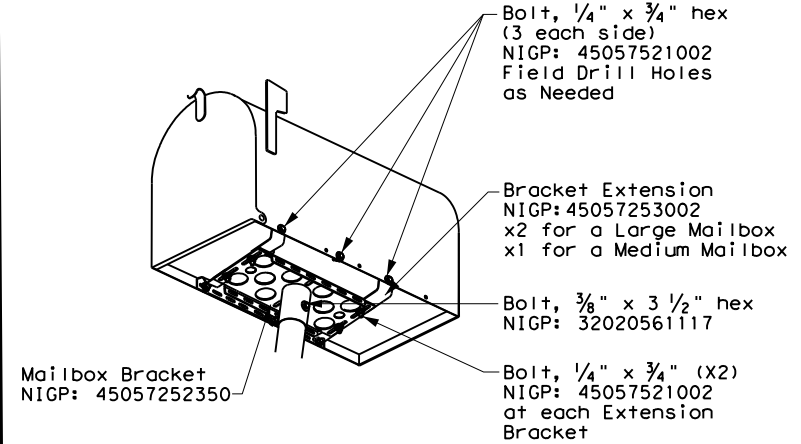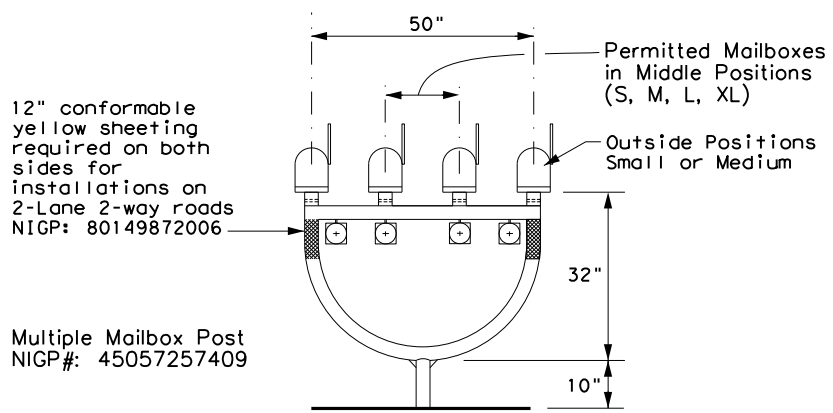

MAILBOX SIZES


MAILBOX SIZE	TYPICAL DIMENSIONS			MAX **
	LENGTH	WIDTH	HEIGHT	
SMALL	19 1/2"	6"	7"	6 LBS
MEDIUM	22 1/2" *	8" *	11 1/2" *	8 LBS
LARGE	23 1/2"	11 1/2"	13 1/2"	11 LBS
EXTRA LARGE	18"	14"	12"	13 LBS
LOCKABLE	18"	11 1/2"	15"	23 LBS

GENERAL NOTES:

- Dimensions shown (length, width, and height) are typical, not maximums. However, anytime a medium size mailbox is mounted on a single/double mount or on the outside position on a multi mount, the dimensions shown are maximums.
- Mailboxes shall be made of light weight sheet metal or light weight plastic. Heavy steel, cast iron or decorative mailboxes shall not be used on the state highway system.

* See Note 1.
 ** Excluding Molded Plastic on 4 X 4 Post


TYPICAL INSTALLATION MEASUREMENTS

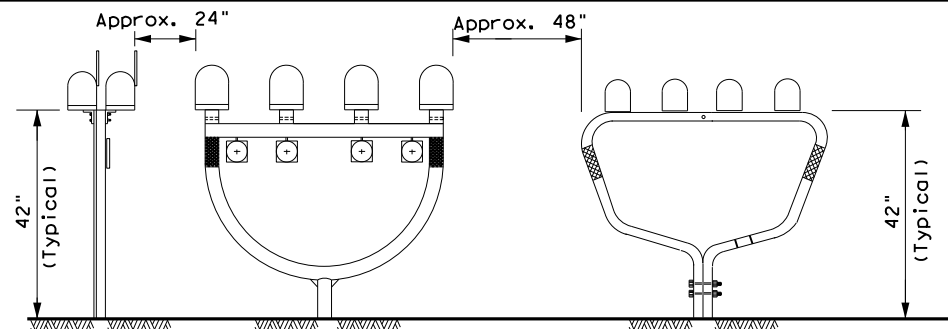


NOTE:

Mailbox installations in sidewalk areas shall be in accordance with the latest TxDOT Design Standard sheets PED-Pedestrian Facilities Curb Ramps.


TYPE 2 and 4 - SINGLE/DOUBLE

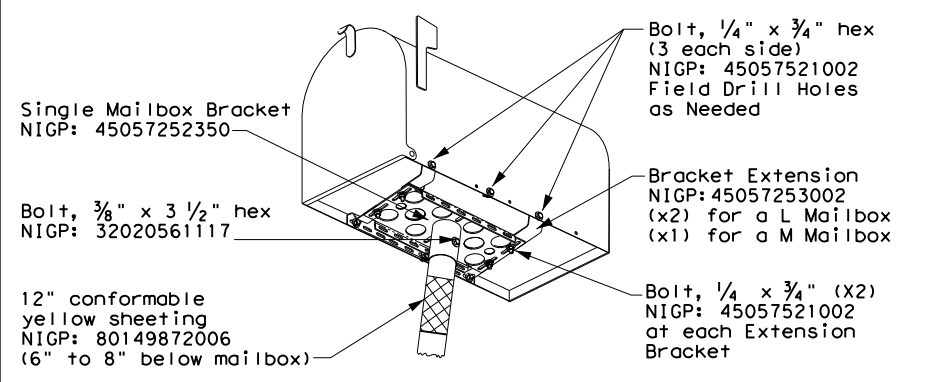

TYPE 3 - SINGLE/DOUBLE


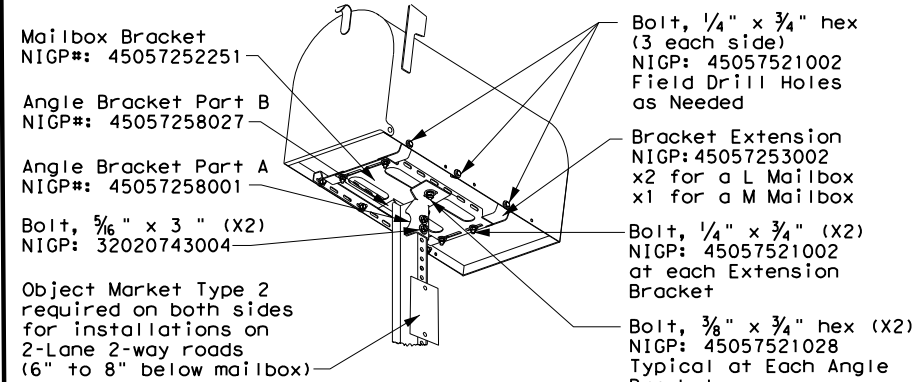


PLACEMENT OF EMERGENCY LOCATION NUMBER

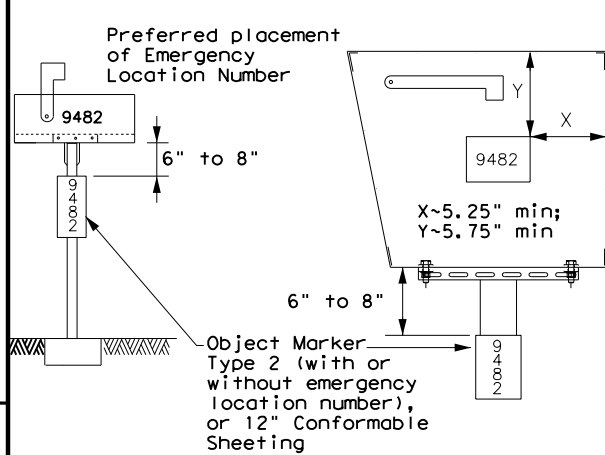


NOTES:

- Location numbers are provided by homeowner. Minimum size 1" height.
- Location number is typically placed on the mailbox in a contrasting color.
- Black numbers may be placed on the Type 2 object marker if the numbers cannot be placed on the mailbox.
- Alternatively, a green or blue plate with white numbers attached may be mounted below the object marker. Other contrasting color configuration, as approved, may be used.
- See 3 of 4 for Foundation details.
- See 4 of 4 for Hardware details.

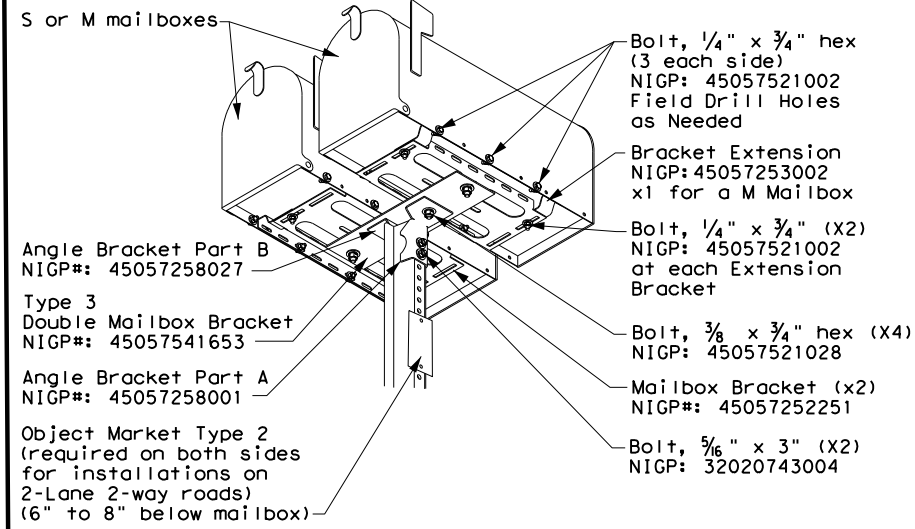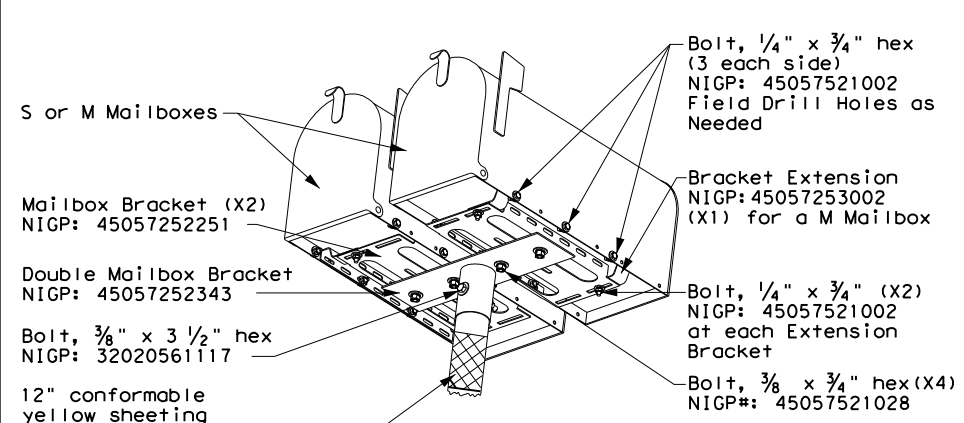

TYPE 5

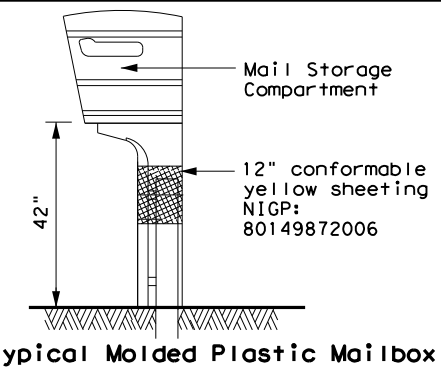

SHEET 1 OF 4



MAILBOX MOUNTING AND ASSEMBLY

MB(1)-21

FILE: MB-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT March 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
2/2005	11/2009	4/2015	DIST	COUNTY
6/2005	1/2011		AUS	BASTROP
11/2006	7/2014			SHEET NO. 54


DATE: \$DATE\$
 \$TIME\$
 FILE: \$FILE\$

NOTE:

Double mailbox mounts are not allowed with a type 4 multiple mailbox installation

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TYPE 1 - MULTI LOCKABLE AND XL MAILBOX

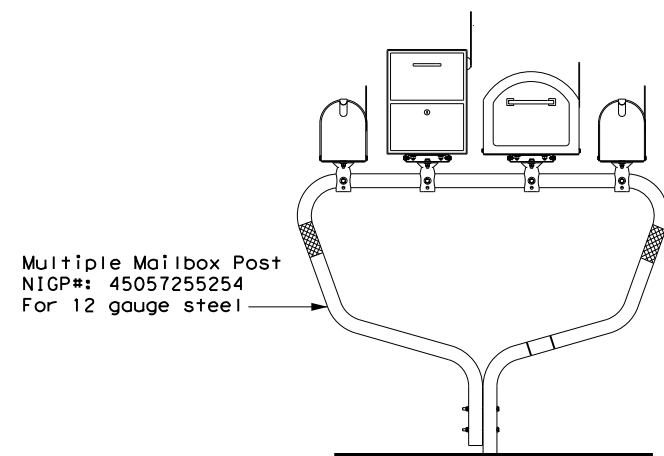

Multiple Mailbox Post
NIGP#: 45057255254
For 12 gauge steel

TYPE 2/4 - SINGLE LOCKABLE MAILBOX

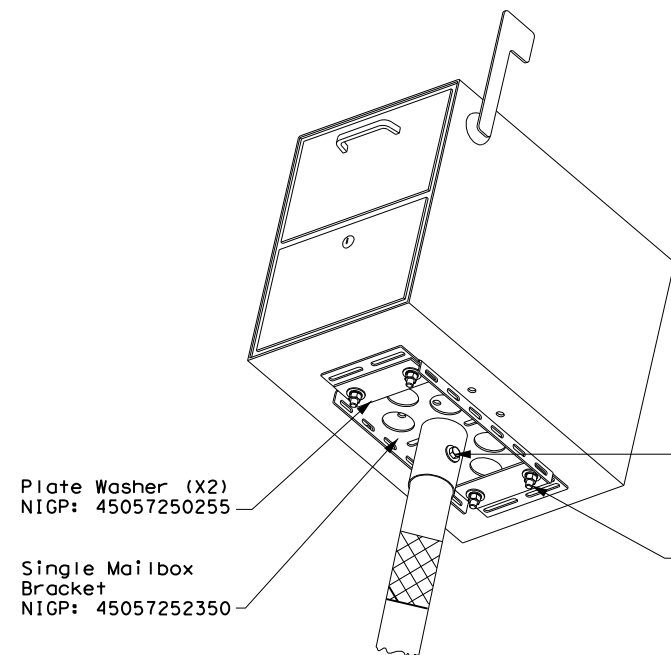



Plate Washer (X2)
NIGP: 45057250255

Single Mailbox Bracket
NIGP: 45057252350

Bolt, 3/8" x 3 1/2" hex (X2)
NIGP: 32020561117

Bolt, 5/16" x 1 1/4" hex (X4)
NIGP: 32020681246

TYPE 2/4 - SINGLE XL MAILBOX

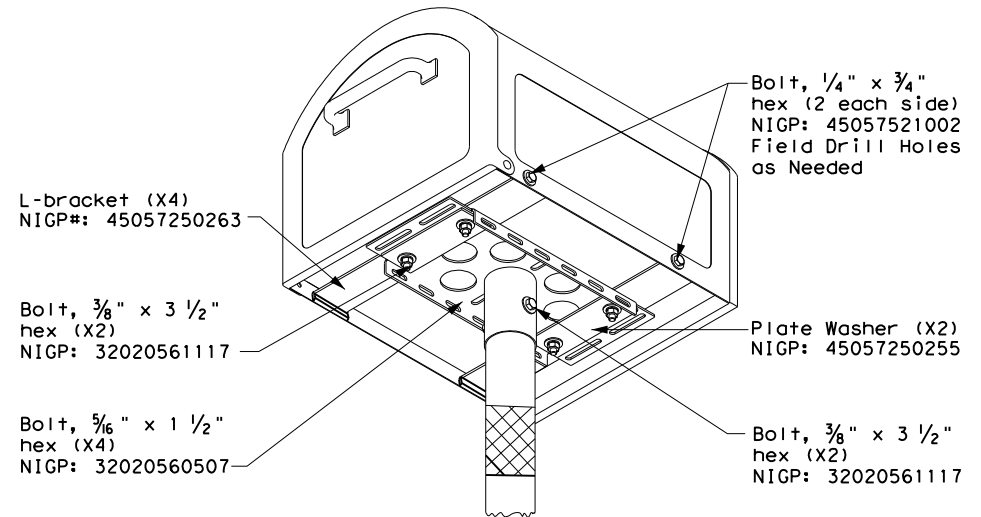

L-bracket (X4)
NIGP#: 45057250263

Bolt, 3/8" x 3 1/2" hex (X2)
NIGP: 32020561117

Bolt, 5/16" x 1 1/2" hex (X4)
NIGP: 32020560507

Single Mailbox Bracket
NIGP: 45057252350


Bolt, 1/4" x 3/4" hex (2 each side)
NIGP: 45057521002
Field Drill Holes as Needed

Plate Washer (X2)
NIGP: 45057250255

Bolt, 3/8" x 3 1/2" hex (X2)
NIGP: 32020561117

NOTE:
Follow same configuration when mounting an XL mailbox on a Type 4 multi post.

TYPE 1 MULTI - LOCKABLE ARCHITECTURAL (LA)

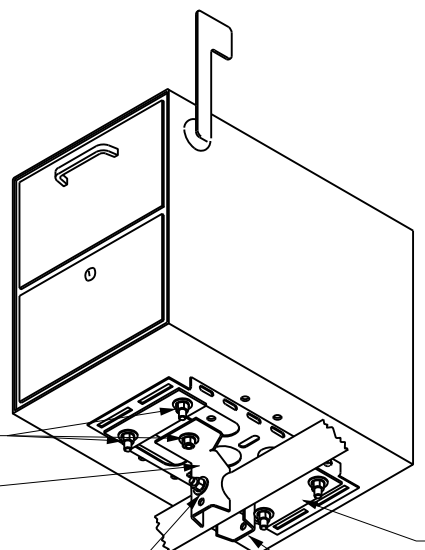

Bolt, 3/8" x 3/4" hex (X6)
NIGP: 45057521028
Typical at Each Angle Bracket and plate washer


Mailbox Bracket
NIGP: 45057252251 (Inverted)

Bolt, 3/8" x 4 1/2" hex
NIGP: 32020561133
Drill 1/16" hole in Post

Plate Washer (X2)
NIGP: 45057250255

Angle Bracket Part A (X2)
NIGP: 45057258001

TYPE 1 MULTI - XL MAILBOX

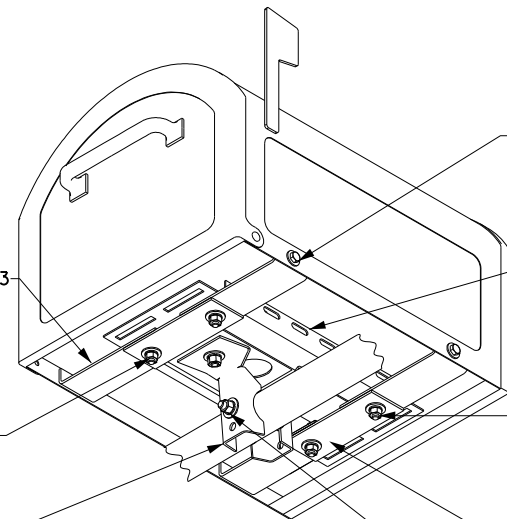

L-bracket (X4)
NIGP#: 45057250263

Bolt, 3/8" x 3/4" hex (X6)
NIGP: 45057521028
Typical at Each Angle Bracket and plate washer

Angle Bracket Part A (X2)
NIGP: 45057258001

Bolt, 1/4" x 3/4" hex (2 each side)
NIGP: 45057521002
Field Drill Holes as Needed


Mailbox Bracket
NIGP#: 45057252251 (Inverted)

Bolt, 5/16" x 2 1/2" hex (X4)
NIGP: 32020220938
Use existing hole in mailbox

Plate Washer (X2)
NIGP#: 45057250255

Bolt, 3/8" x 4 1/2" hex
NIGP: 32020561133
Drill 1/16" hole in Post

TYPE 3 - XL MAILBOX MOUNTING

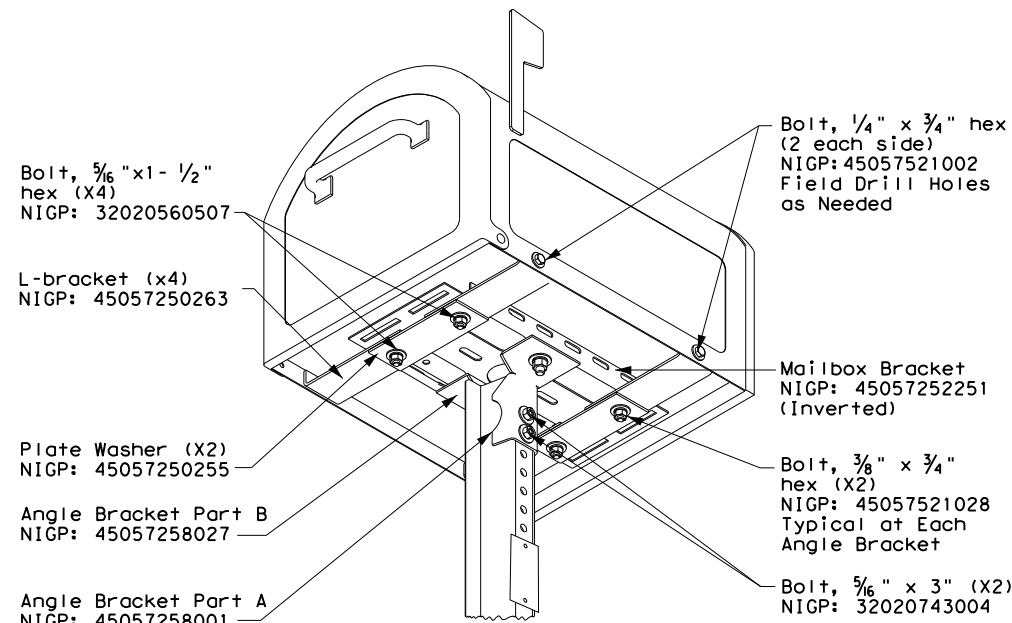

Bolt, 5/16" x 1 1/2" hex (X4)
NIGP: 32020560507

L-bracket (X4)
NIGP: 45057250263

Plate Washer (X2)
NIGP: 45057250255

Angle Bracket Part B
NIGP: 45057258027

Angle Bracket Part A
NIGP: 45057258001

Bolt, 1/4" x 3/4" hex (2 each side)
NIGP: 45057521002
Field Drill Holes as Needed

Mailbox Bracket
NIGP: 45057252251 (Inverted)

Bolt, 3/8" x 3/4" hex (X2)
NIGP: 45057521028
Typical at Each Angle Bracket

Bolt, 5/16" x 3" (X2)
NIGP: 32020743004

SHEET 2 OF 4

Texas Department of Transportation Maintenance Division Standard

XL AND LOCKABLE ARCHITECTURAL MAILBOX ASSEMBLY MB (2) - 21


FILE: MB-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT March 2004	CONT	SECT	JOB	HIGHWAY
2/2005	REVISIONS	0265	05	089, ETC
6/2005	11/2009	4/2015		SH 71, ETC
11/2006	1/2011			
	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	55	

DATE: \$DATES \$TIMES
FILE: \$FILES


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TYPE 1 - SUPPORT/FOUNDATION

Thin Wall Tube w/ V-LOC Anchorage

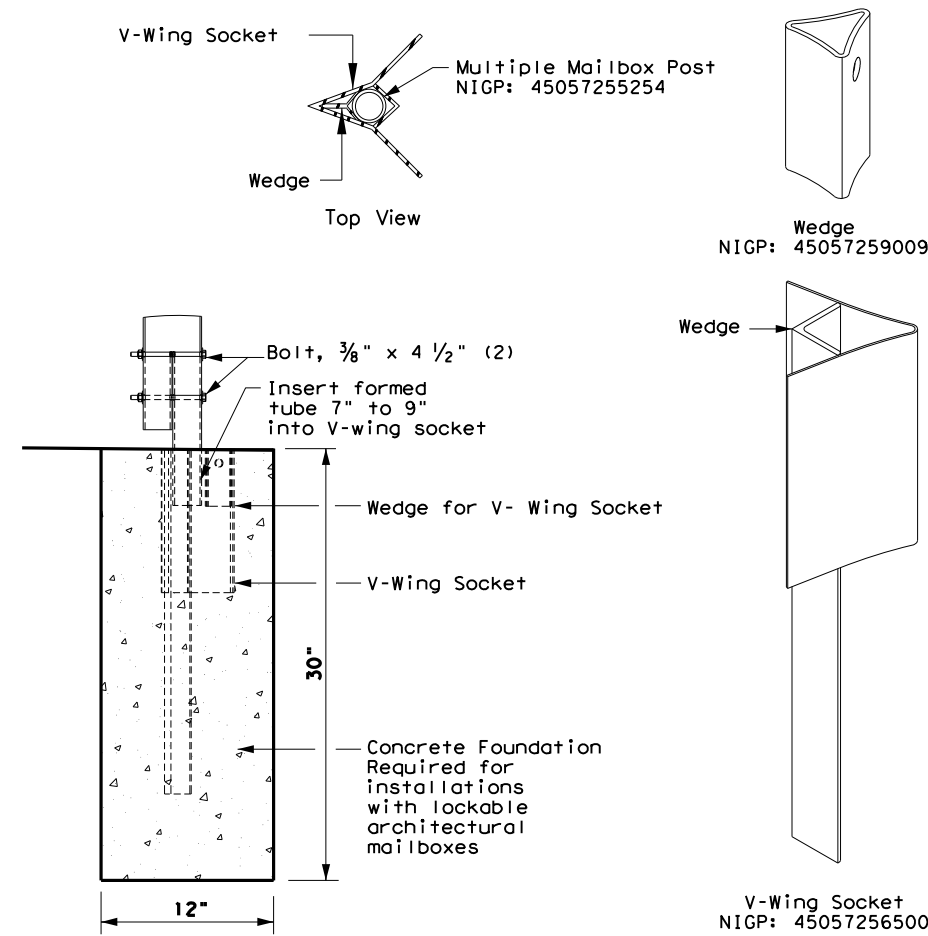


TYPE 3 - SUPPORT/FOUNDATION

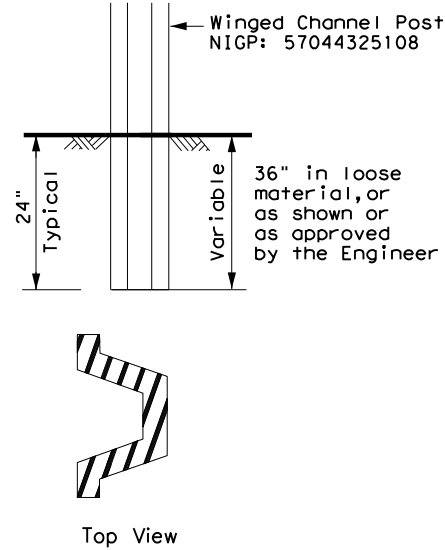


NOTES:

1. Attach Object Marker (OM) facing direction of traffic.
2. OM will also be required on opposite side if installed on a 2-Lane, 2-Way roadway.

TYPE 5 - SUPPORT/FOUNDATION

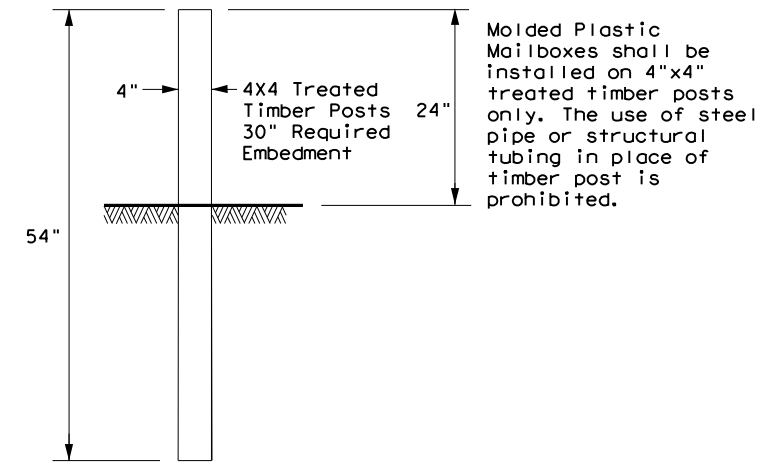

TYPE 6 - TEMPORARY MAILBOX SUPPORT

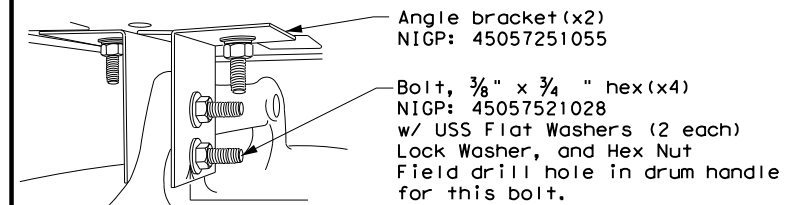


Plastic Drum NIGP: 55093383655
Rubber Collar NIGP: 55093387102

NOTES:

1. Place on approved plastic drum as shown in the Compliant Work Zone Traffic Control Devices (CWZTCD).
2. Existing attachment hardware shall be used unless damaged. Damaged hardware shall be replaced.


TYPE 2 - SUPPORT/FOUNDATION

Thin Wall Steel Tube w/Wedge Anchor System

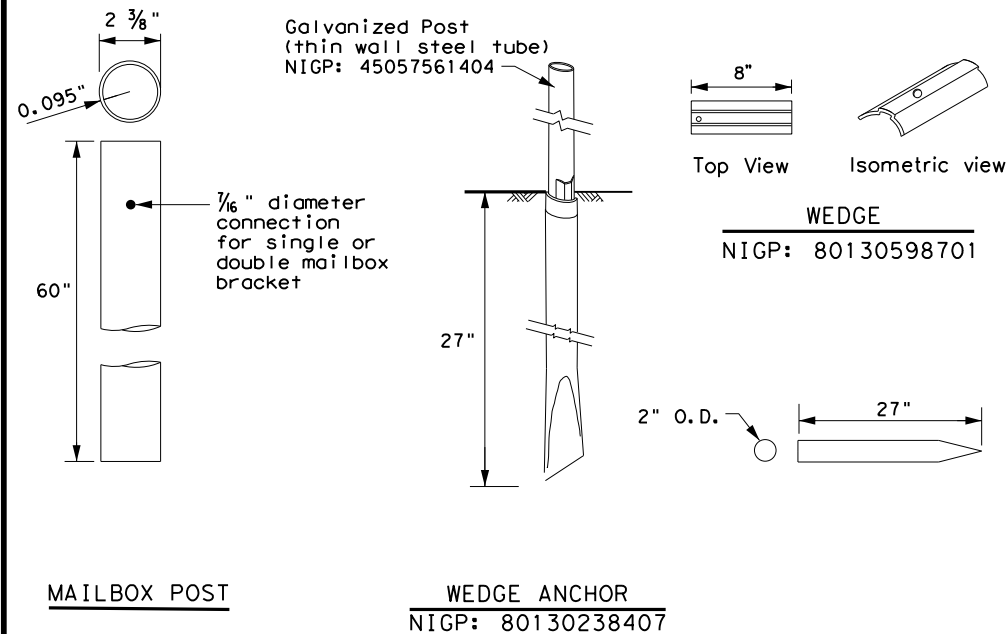

TYPE 4 - SUPPORT/FOUNDATION

Whitecoated steel post NIGP: 45057561107
Multiple post NIGP: 45057257409
Recycled Rubber post (RR) NIGP: 45057561057

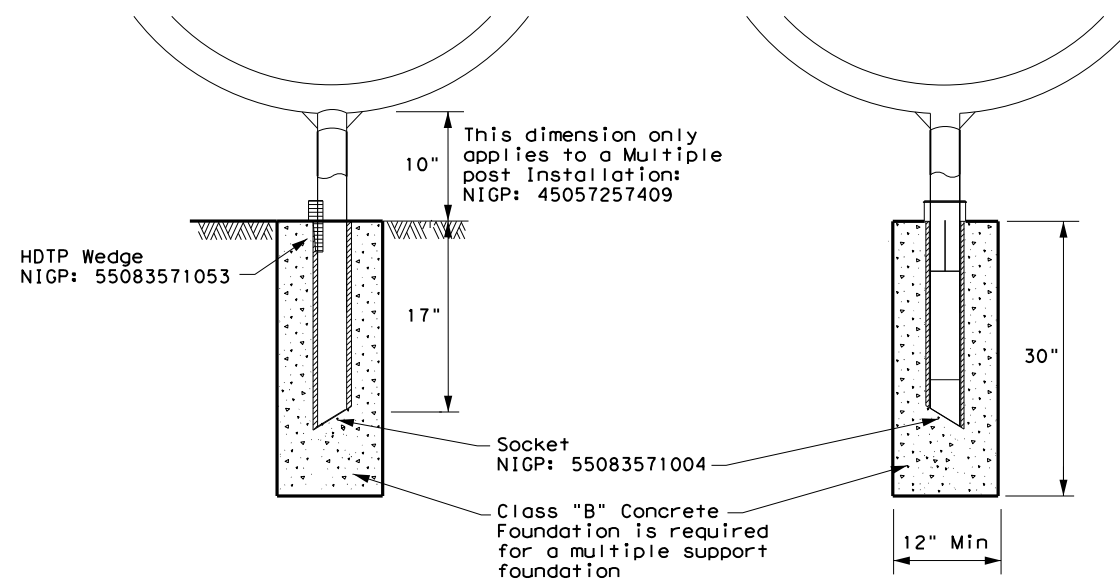

GENERAL NOTES:

1. Erect post plumb or vertical.
2. When galvanized part is required galvanize in accordance with Item 445.
3. Use a concrete footing as shown or when directed. Concrete footing will be required when soils do not hold the support/foundations in a stable condition, only on Type 1, Type 2, and Type 4

SHEET 3 OF 4



MAILBOX SUPPORT AND FOUNDATION

MB (3) - 21

FILE: MB-21.dgn	DN:	CK:	DW:	CK:
© TxDOT March 2004	CONT	SECT	JOB	HIGHWAY
2/2005	0265	05	089, ETC	SH 71, ETC
6/2005	DIST	COUNTY	SHEET NO.	
11/2006	AUS	BASTROP	56	

DATE: \$DATE\$
FILE: \$FILE\$


\$TIME\$

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPE	TYPE 1	TYPE 2	TYPE 3	TYPE 4	TYPE 5	TYPE 6
Configuration	Multiple	Single or Double	Single or Double	Single	Double	Multiple
Mailbox Size NIGP #	Outside Position: S or M Inside Position: S, M, L, XL, or LA	Single: S, M, L, XL, or LA Double: SS, SM, MM	Single: S, M, L, or XL Double: SS, SM, MM	S, M, L, XL, or LA	SS, SM, or MM	Outside Position: S or M Inside Position: S, M, L, or XL
Mailbox Post NIGP #	45057255254 (Galvanized Multiple)	45057561404 (Thin Walled Govanize)	57044325108 (Wing Channel Post)	45057561107 (Thin walled white powder coated) 45057561057 (Recycled Rubber Post: S or M only)	45057561107 (Thin Walled White Powder Coated)	45057257409 (White Powder Coated Multiple)
Post and Mailbox Hardware NIGP #	45057259009 (Wedge) 45057256500 (V-Wing Socket) 45057253002 (Bracket Extension) 45057252251 (Mailbox Bracket) 45057258001 (Part A Angle Bracket x2) 45057250255 (Plate Washer for XL/LA x2) 45057250263 (L-Bracket for XL x4)	80130598701 (Wedge) 80130238407 (Wedge Anchor) 45057253002 (Bracket Extension) 45057252343 (Double MB Bracket) 45057252350 (S. Mailbox Bracket) 45057252251 (Mailbox Bracket) 45057250255 (Plate Washer for XL/LA x2) 45057250263 (L-Bracket for XL x4)	45057541653 (Type 3 Double Mailbox Bracket) 45057252251 (Mailbox Bracket) 45057253002 (Bracket Extension) 45057258001 (Part A Angle Bracket) 45057258027 (Part B Angle Bracket) 45057250255 (Plate Washer for XL x2) 45057250263 (L-Bracket for XL x4)	55083571053 (Wedge) 55083571004 (Socket) 45057252350 (Single Mailbox Bracket) 45057253002 (Bracket Extension) 45057250255 (Plate Washer for XL/LA x2) 45057250263 (L-Bracket for XL x4)	55083571053 (Wedge) 55083571004 (Socket) 45057253002 (Bracket Extension) 45057252350 (Single Mount Bracket) 45057250255 (Plate Washer for XL x2) 45057252251 (Mailbox Bracket x2)	45057251055 Angle Bracket (x2)
Foundation Used	Class B Concrete (Required for LA Mailboxes)	Class B Concrete (Required for LA Mailboxes)	None	Class B Concrete (not used with recycled rubber post, required for LA Mailboxes)	Class B Concrete (not required)	Class B Concrete None




NIGP: 45057250263
L-Bracket x4 for XL sized mailboxes




NIGP: 45057252343
Double Mailbox Bracket For Type 2 and Type 4 double mount

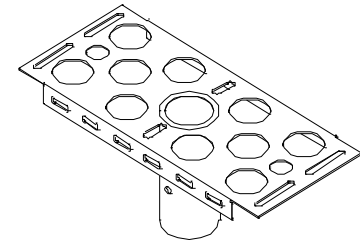

NIGP: 45057252350
Single Mailbox Bracket For Type 2 single and for Type 4 single and multi mount




NIGP: 45057258001
Part "A" Angle Bracket For Type 1 multi (2 per mailbox) and Type 3 single and double



NIGP: 45057251055
Type 6 Angle Bracket (2 per mailbox)




NIGP: 45057252251
Mailbox Bracket For Type 1 multi and any double mount (use 2)

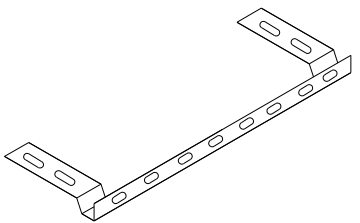


NIGP: 45057253002
Bracket Extension Use 1 for a medium Mailbox Use 2 for a Large Mailbox




NIGP: 45057258027
Part "B" Angle Bracket For Type 3 single and double




NIGP: 80130598701
Wedge for Type 2




NIGP: 45057250255
Plate Washer for Architecural and XL Mailboxes




NIGP: 45057541653
Type 3 double mailbox bracket



NIGP: 55083571053
Type 4 Mailbox Wedge




NIGP: 55083571004
Type 4 Mailbox Socket



NIGP: 80130238407
Type 2 Wedge Anchor



NIGP: 45057259009
Wedge for Type 1 V-wing Socket

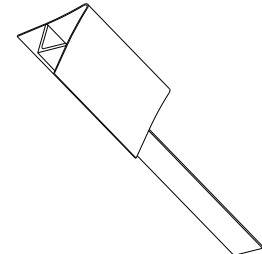


NIGP: 45057256500
V-wing Socket for Type 1 Foundation

NIGP #	OBJECT MARKERS AND CONFORMABLE SHEETING
55008311759	Type 2 OM 4"x4" (3 Needed) for Type 3 Wing Channel Post
55008312906	Type 2 OM 6"x12" (1 needed) for Type 3 Wing Channel Post
80149872006	12" Conformable Reflective Yellow Sheeting for Flexible Posts


NOTES:

- Type 2 object marker in accordance with Traffic Engineering Standard Delineators & Object Markers.
- A light weight receptacle for newspaper delivery can be attached to mailbox posts if the receptacle does not touch the mailbox, present a hazard to traffic or delivery of the mail, extend beyond the front of the mailbox, or display advertising, except the publication title.

BID CODES FOR CONTRACTS

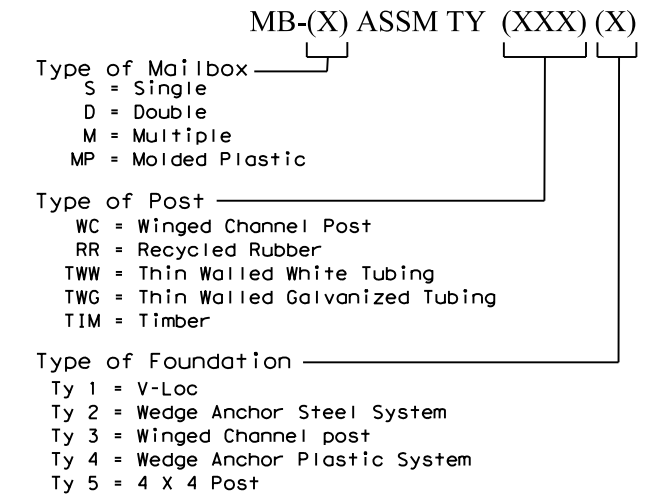

SHEET 4 OF 4

 Texas Department of Transportation				Maintenance Division Standard	
<h2>NIGP PARTS LIST AND COMPATIBILITY</h2> <h3>MB(4)-21</h3>					
FILE: MB-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT	
©TxDOT March 2004	CONT	SECT	JOB	SH	HIGHWAY
2/2005	11/2009	4/2015	0265 05	089, ETC	SH 71, ETC
6/2005	1/2011		DIST	COUNTY	SHEET NO.
11/2006	7/2014		AUS	BASTROP	57


DATE: \$DATE\$ \$TIME\$
 FILE: \$FILE\$

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

- Slope as shown elsewhere in the plans. Slope of 6:1 or flatter is required for vehicle safety.
- Provide cement stabilized bedding and backfill in accordance with the Item, "Excavation and Backfill for Structures". Bedding and backfill is considered subsidiary to the Item 467, "Safety End Treatment". When concrete riprap is specified around the safety end treatment, backfill as directed by Engineer.
- Fill the top 4" of void between precast end treatments with concrete riprap. Concrete riprap is considered subsidiary to the Item 467, "Safety End Treatment".
- Adjust clear distance between pipes to provide for the minimum distance between safety end treatments.
- Safety pipe runners are required for multiple pipe culverts with more than two pipes.


REQUIREMENTS FOR CULVERT PIPES AND SAFETY PIPE RUNNERS

Pipe I.D.	Min Wall Thickness	Min O.D.	Min O.D. at Tapered End	Min Reinf Requirements (sq. in. per ft. of Pipe)	Max Slope	Min Length of Unit	Pipe Runner Requirements		Required Pipe Runner Sizes		
							Single Pipe	Multiple Pipe	Nominal Dia	O.D.	I.D.
12"	2"	16"	16"	0.07 Circ.	6:1	4' - 0"	No	(5)	3" STD	3.500"	3.068"
15"	2 1/4"	19 1/2"	19"	0.07 Circ.	6:1	5' - 8"	No	(5)	3" STD	3.500"	3.068"
18"	2 1/2"	23"	21 1/2"	0.07 Circ.	6:1	7' - 3"	No	(5)	3" STD	3.500"	3.068"
24"	3"	30"	27"	0.07 Circ.	6:1	10' - 6"	No	(5)	3" STD	3.500"	3.068"
30"	3 1/2"	37"	31"	0.18 Circ.	6:1	12' - 1"	No	Yes	4" STD	4.500"	4.026"
36"	4"	44"	36"	0.19 Ellip.	6:1	15' - 4"	Yes	Yes	4" STD	4.500"	4.026"
42"	4 1/2"	51"	41 1/2"	0.23 Ellip.	6:1	18' - 7"	Yes	Yes	4" STD	4.500"	4.026"

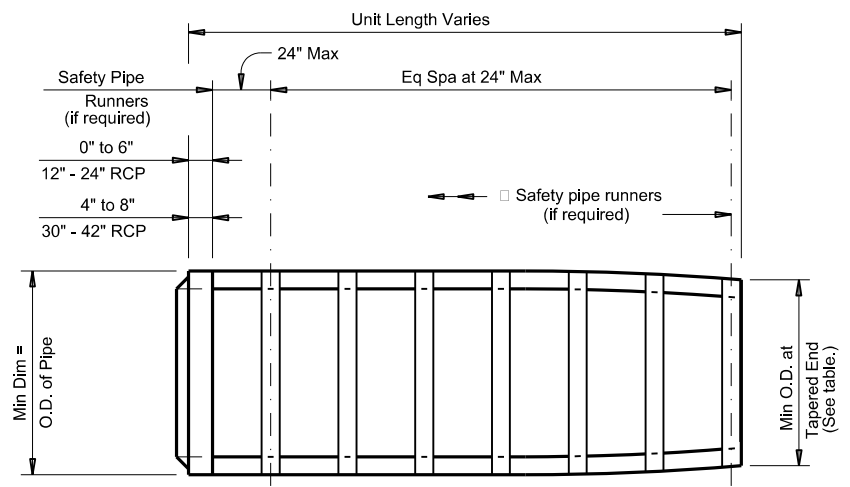


PLAN VIEW - 12" THRU 24"

(Showing spigot end connection.)

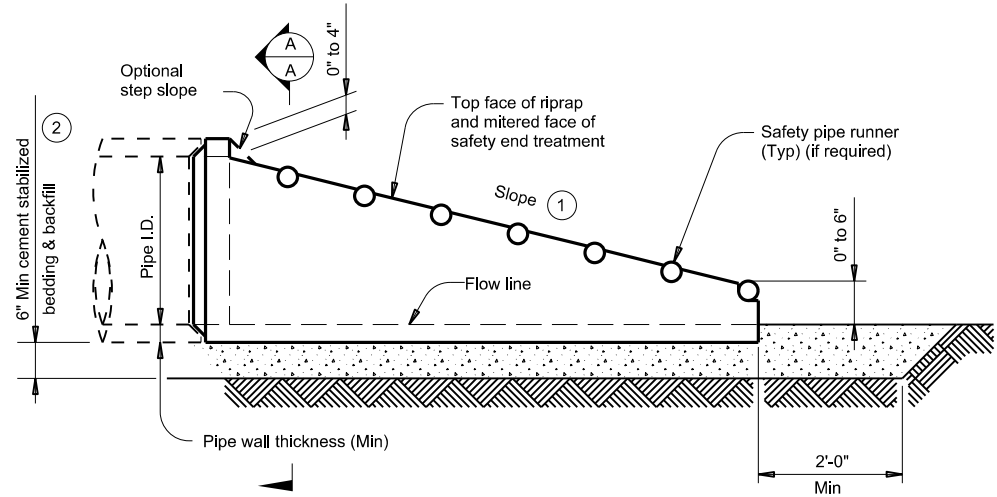


LONGITUDINAL ELEVATION - 12" THRU 24"

(Showing spigot end connection.)

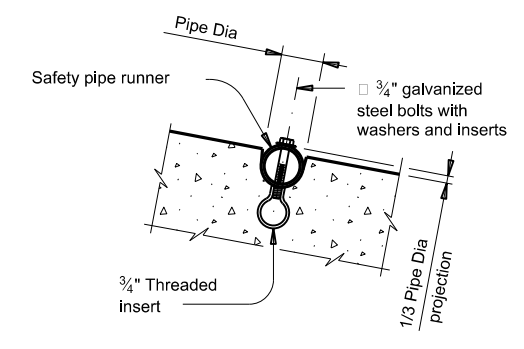


INSTALLATION DETAIL FOR SAFETY PIPE RUNNERS

(If required)

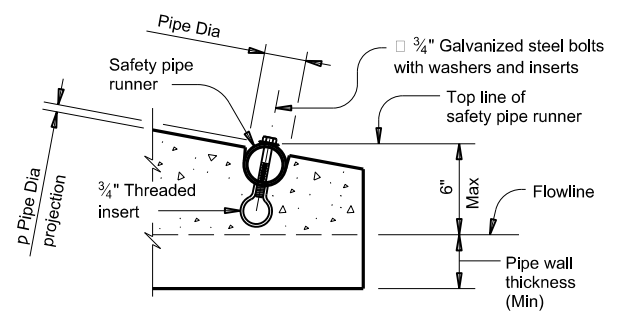


OPTION A

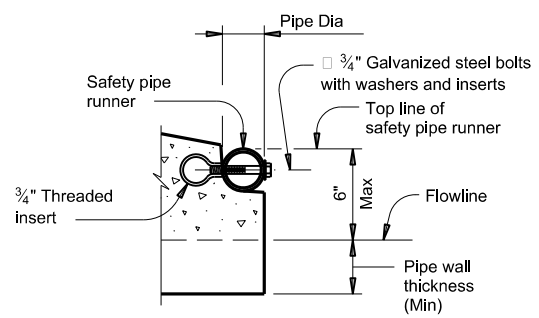


OPTION B

END DETAILS FOR INSTALLATION OF SAFETY PIPE RUNNERS

(If required)

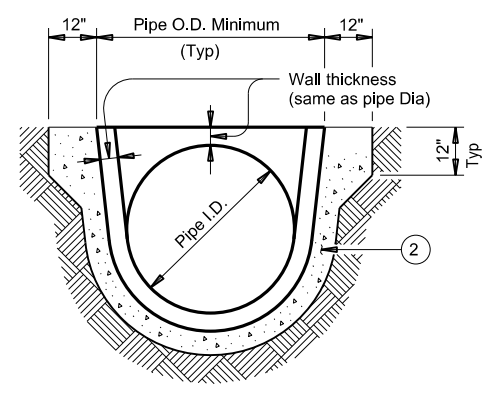

SECTION A-A

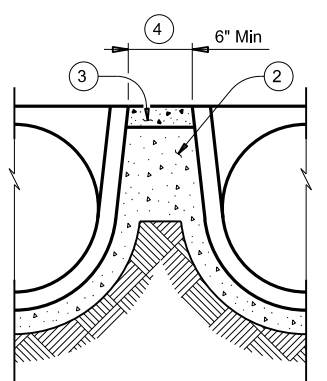

MULTIPLE PIPE INSTALLATION

MATERIAL NOTES:

Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel reinforcing in riprap concrete unless noted otherwise.
 Provide pipe runners meeting the requirements of ASTM A53 (Type E or S, Gr B), ASTM A500 Gr B, or API 5LX52.
 Galvanize steel components except reinforcing steel after fabrication. Repair galvanizing damaged during transport or construction in accordance with the specifications.

GENERAL NOTES:

Precast safety end treatment for reinforced concrete pipe (RCP) may be used for TYPE II end treatment as specified in Item 467, "Safety End Treatment".
 When precast safety end treatment is used as a Contractor's alternate to mitered RCP, riprap will not be required unless noted otherwise on the plans.
 Manufacture precast concrete end sections in accordance with Item 464, "Reinforced Concrete Pipe" and in accordance with ASTM Specification C-76, Class III, Wall B for circular pipe.
 Provide precast concrete end sections with a spigot or bell end for compatibility to upstream or downstream end conditions with sufficient annular space to allow for grout, mortar, cold applied asphalt joint compound or pre-formed plastic gasket material.
 Methods of lifting shall be provided by the manufacturer for ease of loading, unloading and installation.
 Pipe runners are designed for a traversing load of 10,000 Lbs at yield as recommended by Research Report 280-2F, "Safety Treatment of Roadside Parallel-Drainage Structures", Texas Transportation Institute, March 1981.

Bridge Division Standard

PRECAST SAFETY END TREATMENT


TYPE II ~ PARALLEL DRAINAGE

PSET-RP


FILE: psetrpss-20.dgn	DN: RLW	CK: KLR	DW: JTR	CK: GAF
©TxDOT February 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089.ETC	SH 71, ETC
	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	58	

DATE:
FILE:



ESTIMATED CONCRETE RIPRAP QUANTITIES (CY)								
Nominal Culvert (Pipe) I.D.	PSET-SC and PSET-SP Standards					PSET-RC and PSET-RP Standards		
	Unit Width "W"	Side Slope			Unit Width "W"	Side Slope		
		3:1	4:1	6:1		3:1	4:1	6:1
12"	23.0"	0.1	0.2	0.2	16.0"	0.1	0.1	0.2
15"	26.5"	0.2	0.2	0.3	19.5"	0.1	0.2	0.2
18"	30.0"	0.2	0.2	0.3	23.0"	0.2	0.2	0.3
24"	37.0"	0.3	0.3	0.5	30.0"	0.2	0.3	0.4
30"	44.5"	0.3	0.4	0.6	37.0"	0.3	0.3	0.5
36"	51.5"	0.4	0.5	0.7	44.0"	0.3	0.4	0.6
42"	58.5"	0.5	0.6	0.8	51.0"	0.4	0.5	0.7

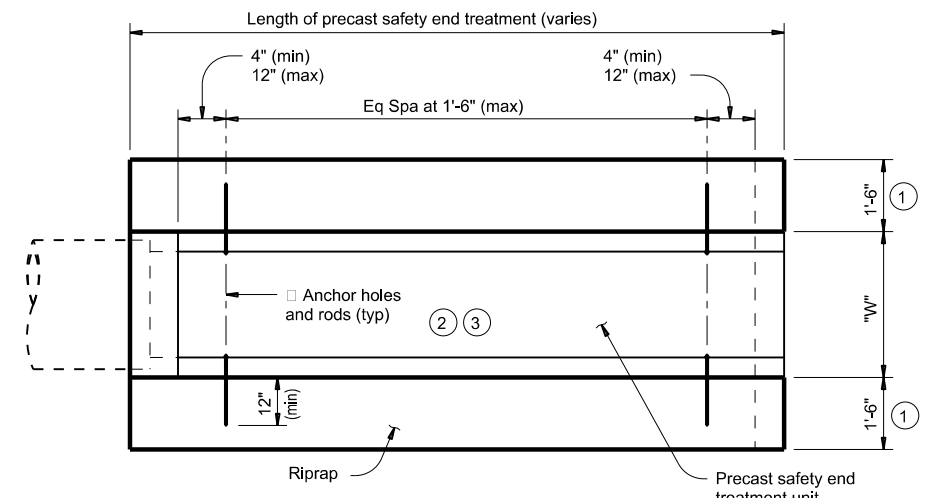


PLAN

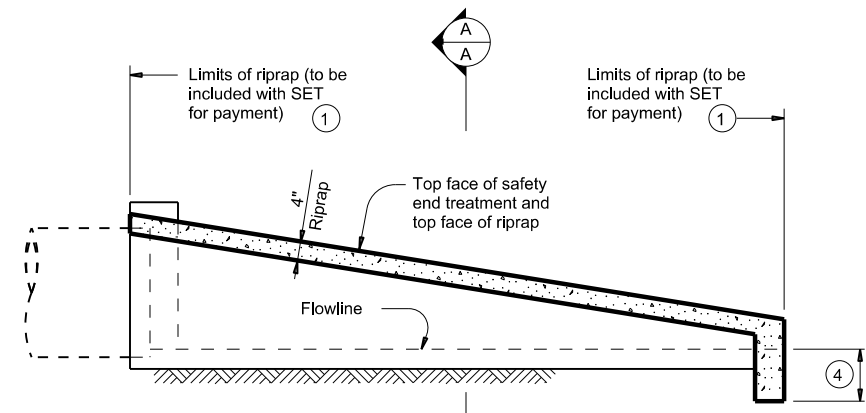

LONGITUDINAL ELEVATION

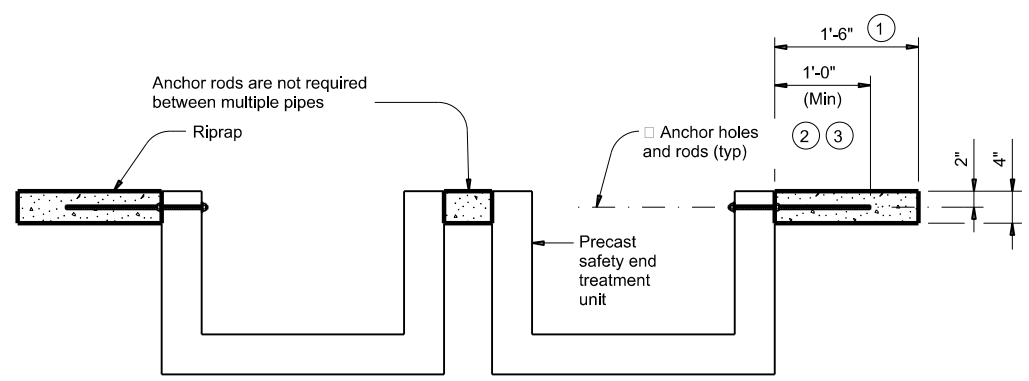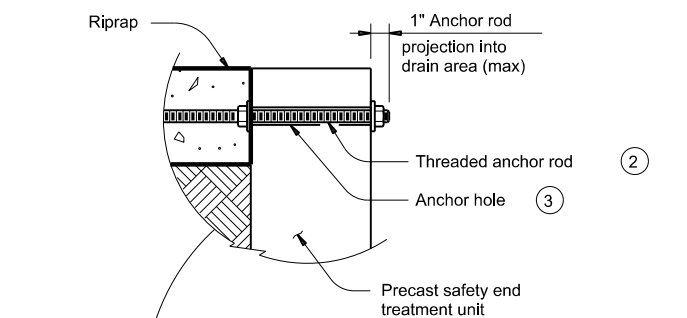

MULTIPLE PIPE INSTALLATION

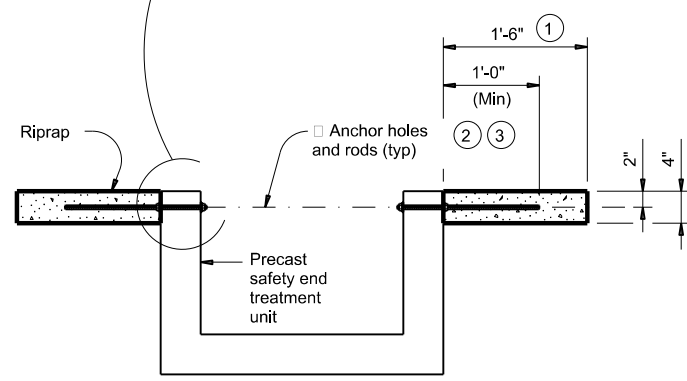

SINGLE PIPE INSTALLATION

SECTION A-A

- Riprap placed beyond the limits shown will be paid as concrete riprap in accordance with Item 432, "Riprap". When riprap is cast integrally with the precast safety end treatment, this dimension is 1'-0" minimum.
- 1#2" Dia ASTM A307 Gr A threaded anchor rod with 2 nuts and 2 washers. Galvanize all components in accordance with Item 445, "Galvanizing". Repair galvanizing that is damaged during transport or construction in accordance with the specifications.
- 3/4" through holes in walls of safety end treatment for riprap anchor rods may be drilled with rotary (coring or masonry) type drilling equipment or may be formed. Do not use percussive (star) type drilling equipment. If holes are drilled, patch spalls in the inside face of the wall exceeding 1#2" from the holes.
- Provide riprap toe wall when dimension is shown elsewhere in the plans or when field conditions require a toe wall.
- Quantities shown are for one end of one reinforced concrete pipe culvert. For multiple pipe culverts, quantities will need to be adjusted. Riprap quantities are for Contractor's information only. Quantities are based on the minimum unit lengths shown on the Precast Safety End Treatment (SET) standard sheets.

MATERIAL NOTES:

Provide Class "B" riprap in accordance with Item 432, "Riprap". Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel reinforcing in riprap concrete unless noted otherwise. The anchor rods shown are always required.

GENERAL NOTES:

Precast safety end treatment for reinforced concrete pipe may be used for TYPE II end treatment as specified in Item 467, "Safety End Treatment". Refer to PSET-SC or PSET-SP standard sheets for details of square safety end treatments not shown. Refer to PSET-RC or PSET-RP standard sheets for details of round safety end treatments not shown. For precast units with integrally cast riprap, substitute reinforcing steel in the amount on 0.26 in./ft. minimum for the threaded anchor rods shown. When requested, submit sealed engineering drawings for approval prior to construction. Shop drawings will not be required. Note that a proprietary precast unit with integral riprap is available from L&R Precast Concrete Works, Inc. (956) 583-6293 or www.lrpccast.com. Payment for riprap and toewalls is included in the price bid for each safety end treatment.

These riprap details are only applicable when notes that require placement of riprap with precast safety end treatments are shown elsewhere in the plans.
 Precast units with integrally cast riprap are permitted unless noted otherwise on the plans.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
 FILE:

				Bridge Division Standard	
PRECAST SAFETY END TREATMENT TYPE II RIPRAP DETAILS PSET-RR					
FILE:	psetrrse-20.dgn	DN:	GAF	CK:	TxDOT
REVISED:	February 2020	CON:	0265	SECT:	05
		JOB:	089.ETC		SH 71, ETC
		DIST:	AUS	COUNTY:	BASTROP
				SHEET NO.:	59


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

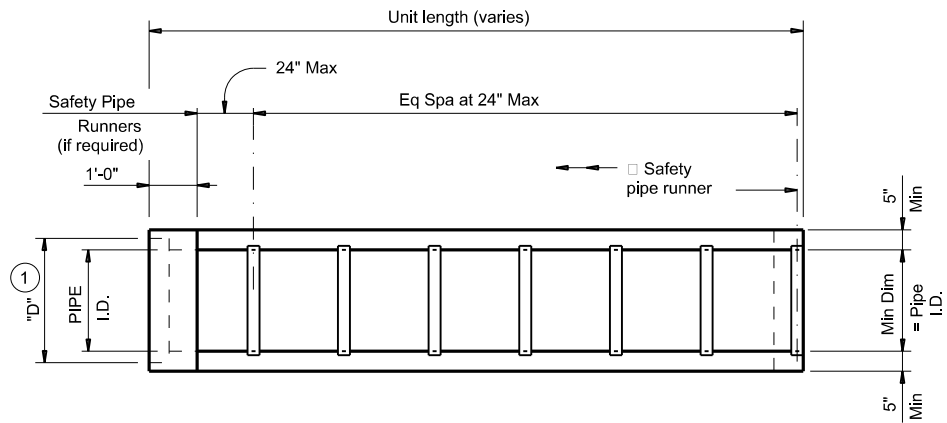


PLAN

(Showing bell end connection.)

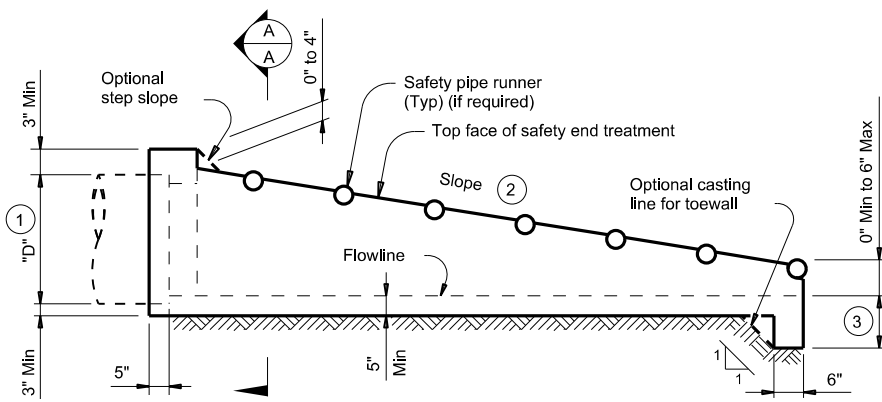


LONGITUDINAL ELEVATION

(Showing bell end connection.)

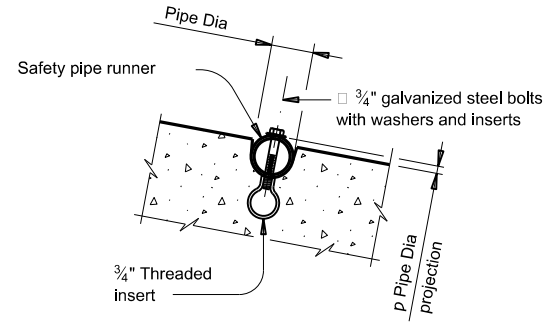


INSTALLATION DETAIL FOR SAFETY PIPE RUNNERS

(If required)

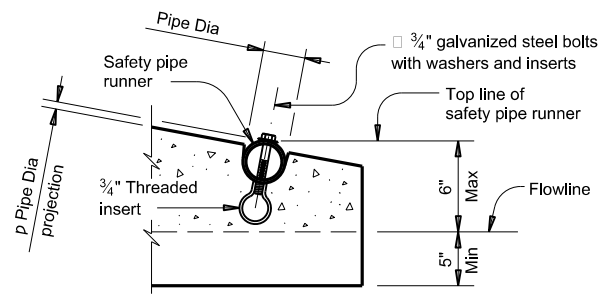


OPTION A

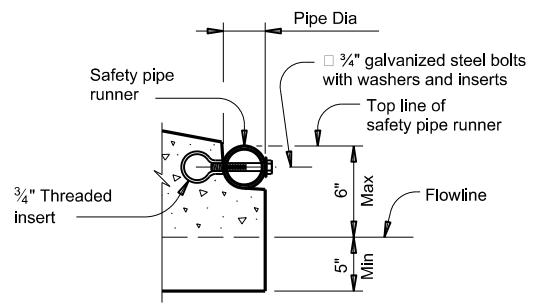


OPTION B

END DETAILS FOR INSTALLATION OF SAFETY PIPE RUNNERS

(If required)

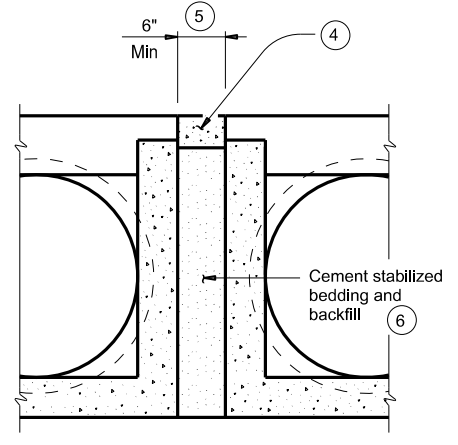


MULTIPLE PIPE INSTALLATION

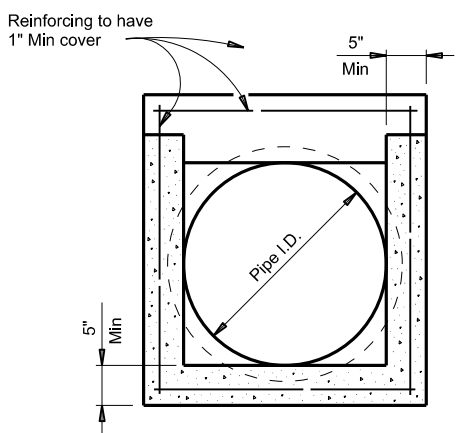


OPTION WITH SQUARE BOTTOM

SECTION A-A

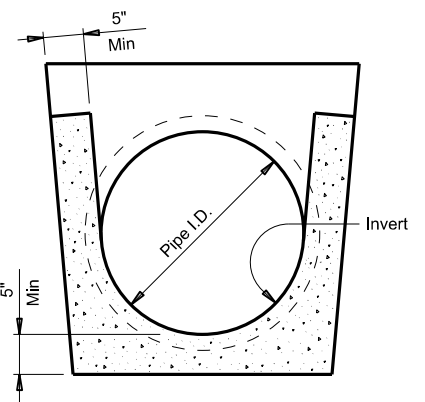

OPTION WITH INVERT BOTTOM

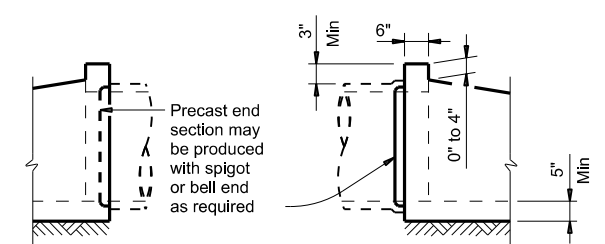

OPTIONAL JOINT FOR RCP

(Showing joint between RCP and precast safety end treatment.)

REQUIREMENTS FOR CULVERT PIPES AND SAFETY PIPE RUNNERS

Pipe I.D.	RCP Wall "B" Thickness	TP Wall Thickness (7)	"D" (1)	Slope	Min Length	Pipe Runners Required		Required Pipe Runner Size		
						Single Pipe	Multiple Pipe	Nominal Dia.	O.D.	I.D.
12"	2"	1.15"	17.00"	6:1	4' - 9"	No	Yes, for > 2 pipes	3" STD	3.500"	3.068"
15"	2 1/4"	1.30"	20.50"	6:1	6' - 5"	No	Yes, for > 2 pipes	3" STD	3.500"	3.068"
18"	2 1/2"	1.60"	24.00"	6:1	8' - 0"	No	Yes, for > 2 pipes	3" STD	3.500"	3.068"
24"	3"	1.95"	31.00"	6:1	11' - 3"	No	Yes, for > 2 pipes	3" STD	3.500"	3.068"
30"	3 1/2"	2.65"	38.50"	6:1	14' - 8"	No	Yes	4" STD	4.500"	4.026"
36"	4"	2.75"	45.50"	6:1	17' - 11"	Yes	Yes	4" STD	4.500"	4.026"
42"	4 1/2"	2.7"	52.50"	6:1	21' - 2"	Yes	Yes	4" STD	4.500"	4.026"

- Dimension "D" is based on reinforced concrete pipe (RCP) meeting the requirements of ASTM C-76, Class III, (RCP Wall "B" thickness). Adjust "D" for any other wall thickness used. For thermoplastic pipe (TP) take into account the annular space requirements for grouted connections.
- Slope as shown elsewhere in the plans. Slope of 6:1 or flatter is required for vehicle safety.
- Toewall to be used only when dimension is shown elsewhere in the plans.
- Fill the top 4" of void between precast end treatments with concrete riprap. Concrete riprap is considered subsidiary to the Item 467, "Safety End Treatment".
- Adjust clear distance between pipes to provide for the minimum distance between safety end treatments.
- Provide cement stabilized bedding and backfill in accordance with the Item 400, "Excavation and Backfill for Structures". Bedding and backfill is considered subsidiary to the Item 467, "Safety End Treatment". When concrete riprap is specified around the safety end treatment, backfill as directed by Engineer.
- Thermoplastic pipe wall thickness may vary. Adjust accordingly. Thermoplastic pipe requires the safety end treatments to have a bell end for grouted connections.

GENERAL NOTES:

Precast safety end treatment for reinforced concrete pipe (RCP), and thermoplastic pipe (TP) may be used for TYPE II end treatment as specified in Item "Safety End Treatment".

When precast safety end treatment is used as a Contractor's alternate to mitered RCP, riprap will not be required unless noted otherwise on the plans.

Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel reinforcing in riprap concrete unless noted otherwise.

Manufacture this product in accordance with Item 467, "Safety End Treatment" except as noted below:

A. Provide minimum reinforcing of #4 at 6" (Grade 40) or #4 at 9" (Grade 60) each way or 6"x6" - D12 x D12 or 5"x5" - D10 x D10 welded wire reinforcement (WWR).

B. For precast (steel formed) sections, provide Class "C" concrete (f'c = 3,600 psi).

At the option and expense of the Contractor the next larger size of safety end treatment may be furnished; as long as the "D" dimension cast is that of the required size of pipe.

Pipe runners are designed for a traversing load of 10,000 Lbs at yield as recommended by Research Report 280-2F, "Safety Treatment of Roadside Parallel-Drainage Structures", Texas Transportation Institute, March 1981.

Provide pipe runners meeting the requirements of ASTM A53 (Type E or S, Grade B), ASTM A500 (Grade B), or API 5LX52.

Galvanize all steel components except reinforcing steel after fabrication. Repair galvanizing damaged during transport or construction in accordance with the specifications.

Connect RCP using the Optional Joint for RCP detail shown or in accordance with Item 464, "Reinforced Concrete Pipe". Connect TP by grouting. See Pipe and Box Grouted Connections (PBGC) standard for grouted connections with TP and precast safety end treatment.

Texas Department of Transportation Bridge Division Standard


PRECAST SAFETY END TREATMENT TYPE II ~ PARALLEL DRAINAGE

PSET-SP

FILE: psetsps-21.dgn	DN: RLW	CK: KLR	DW: JTR	CK: GAF
©TxDOT February 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089,ETC	SH 71, ETC
12-21: Added 42" TP	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	60	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

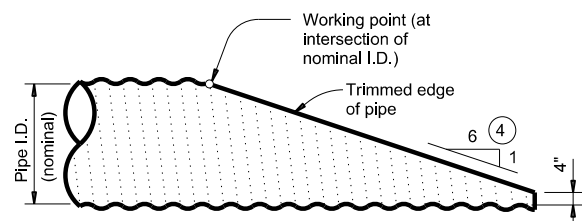


NOTE: All cross pipes, calculations, and dimensions are based on the pipe culverts mitered as shown in this detail. Alternate styles of mitered ends will require that appropriate adjustments be made to the values presented on this standard.

SIDE ELEVATION OF TYPICAL PIPE CULVERT MITER

(Showing corrugated metal pipe (CMP) culvert. Details at reinforced concrete pipe (RCP) culvert are similar.)

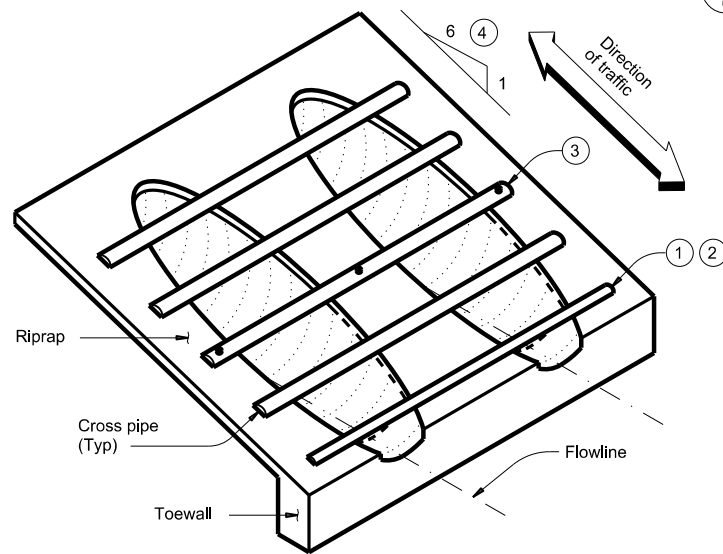


ISOMETRIC VIEW OF TYPICAL INSTALLATION

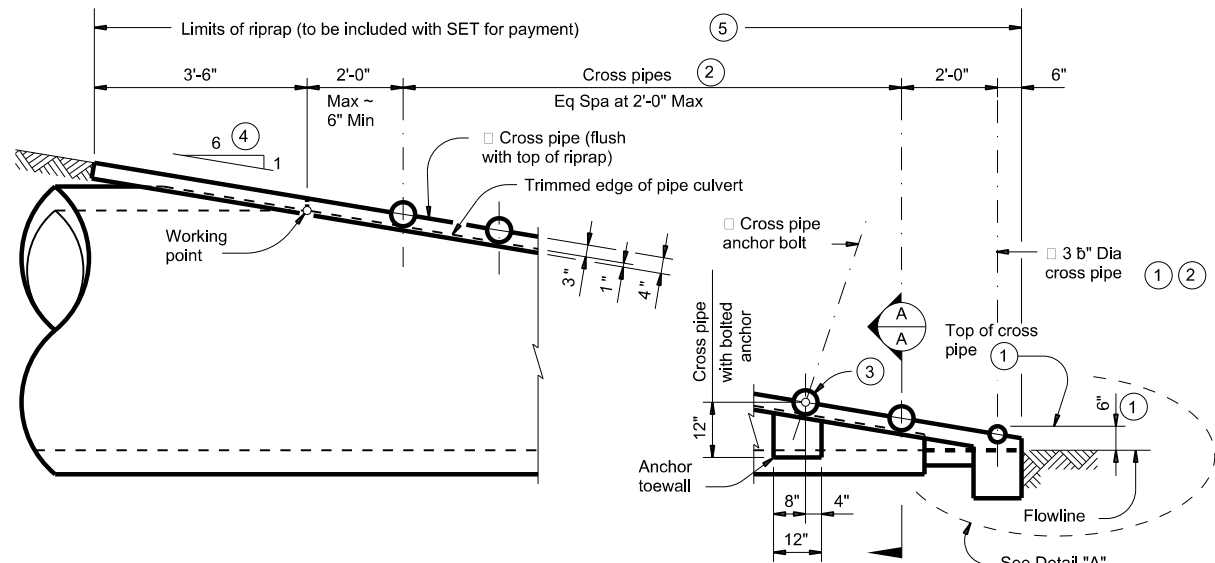


SIDE ELEVATION OF CAST-IN-PLACE CONCRETE


(Showing reinforced concrete pipe (RCP) culvert. Details at corrugated metal pipe (CMP) culvert are similar.)

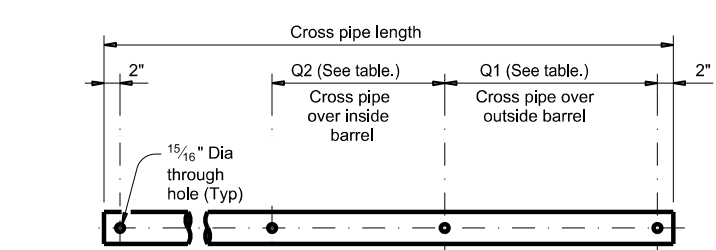

PIPE WITH BOLTED ANCHOR

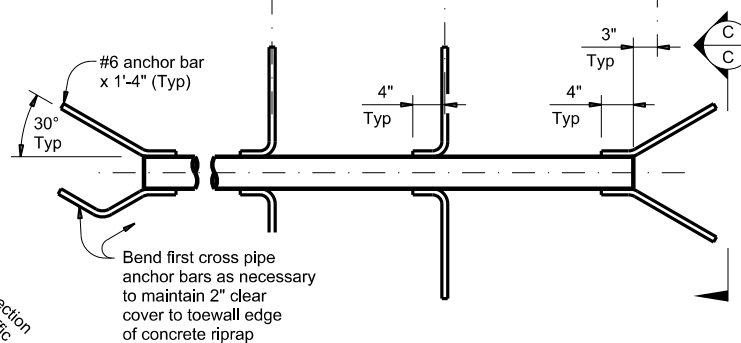


PIPE WITH ANCHOR BARS

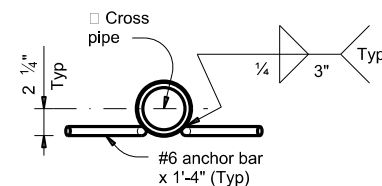


SECTION C-C

CROSS PIPE DETAILS


Limits of riprap (to be included with SET for payment) 5

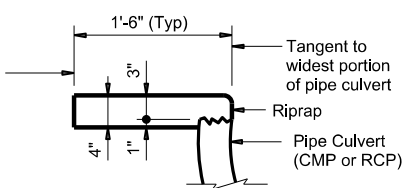

SHOWING TYPICAL PIPE CULVERT AND RIPRAP

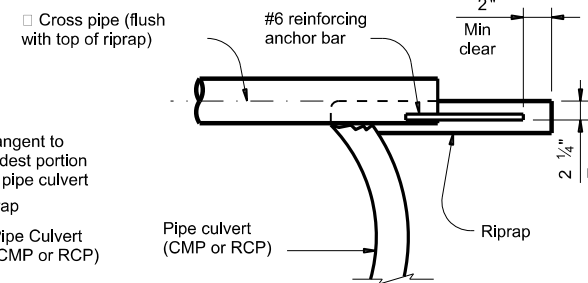


SHOWING CROSS PIPE WITH ANCHOR BAR

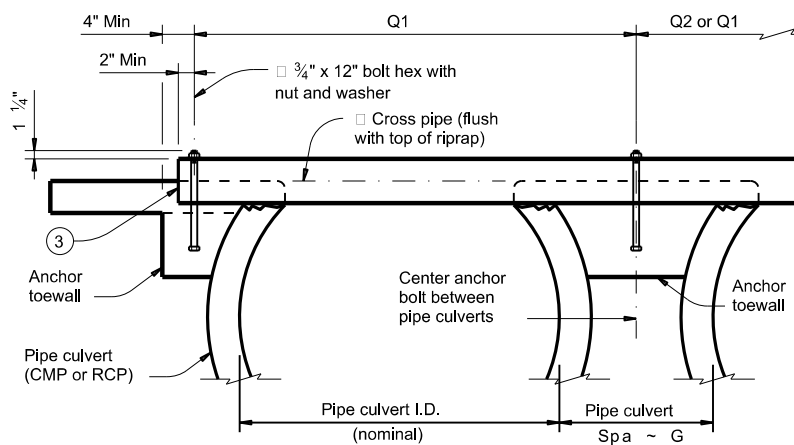


SHOWING CROSS PIPE WITH BOLTED ANCHOR

SECTION A-A

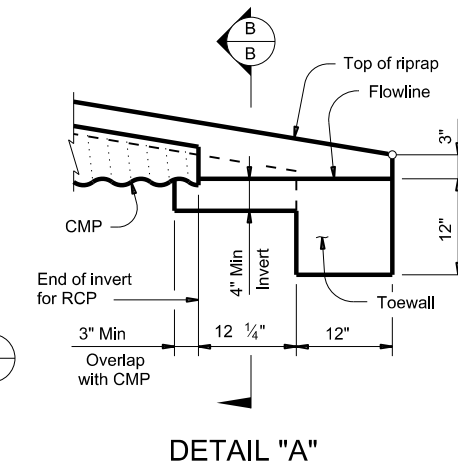

DETAIL "A"

(Showing invert with corrugated metal pipe (CMP) culvert. Reinforced concrete pipe (RCP) culvert details are similar. Cross pipes not shown for clarity.)

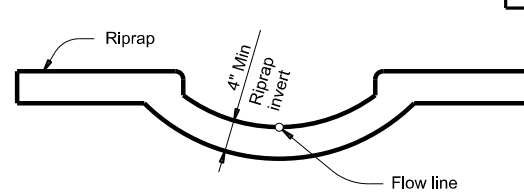

SECTION B-B

(Cross pipes not shown for clarity.)

CROSS PIPE LENGTHS, REQUIRED PIPE SIZES, AND RIPRAP QUANTITIES

Nominal Culvert I.D.	Conc Riprap (CY) (6)	Pipe Culvert Spa ~ G	Single Barrel ~ Q1	Multi-Barrel ~ Q1	Q2	Conditions for Use of Cross Pipes	Cross Pipe Sizes
12"	0.6	0' - 9"	N/A	2' - 1"	1' - 9"	3 or more pipe culverts	3" Std (3.500" O.D.)
15"	0.7	0' - 11"	N/A	2' - 5"	2' - 2"		
18"	0.8	1' - 2"	N/A	2' - 10"	2' - 8"		
21"	0.9	1' - 4"	N/A	3' - 2"	3' - 1"	3 or more pipe culverts	3 1/2" Std (4.000" O.D.)
24"	0.9	1' - 7"	N/A	3' - 6"	3' - 7"		
27"	1.0	1' - 8"	N/A	3' - 10"	3' - 11"		
30"	1.1	1' - 10"	N/A	4' - 2"	4' - 4"	2 or more pipe culverts	3 1/2" Std (4.000" O.D.)
33"	1.2	1' - 11"	4' - 2"	4' - 5"	4' - 8"	All pipe culverts	
36"	1.3	2' - 1"	4' - 5"	4' - 9"	5' - 1"	All pipe culverts	4" Std (4.500" O.D.)
42"	1.5	2' - 4"	4' - 11"	5' - 5"	5' - 10"		
48"	1.7	2' - 7"	5' - 5"	6' - 0"	6' - 7"	All pipe culverts	5" Std (5.563" O.D.)
54"	2.0	3' - 0"	5' - 11"	6' - 9"	7' - 6"		
60"	2.2	3' - 3"	6' - 5"	7' - 4"	8' - 3"		
66"	2.4	3' - 3"	6' - 11"	7' - 10"	8' - 9"	All pipe culverts	5" Std (5.563" O.D.)
72"	2.7	3' - 4"	7' - 5"	8' - 5"	9' - 4"		

- The proper installation of the first cross pipe is critical for vehicle safety. Place the top of the first cross pipe no more than 6" above the flow line.
- Provide cross pipes, except the first bottom pipe, of the size shown in the table. Provide a 3 1/2" standard pipe (4" O.D.) for the first bottom pipe.
- Install the third cross pipe from the bottom of the culvert using a bolted connection. Ensure that riprap concrete does not flow into the cross pipe so as to permit disassembly of the bolted connection to allow cleanout access. At the Contractor's option, install all other cross pipes using the bolted connection details.
- Match cross slope as shown elsewhere in the plans. Cross slope of 6:1 or flatter is required for vehicle safety.
- Riprap placed beyond the limits shown will be paid for as concrete riprap in accordance with Item 432, "Riprap".
- Quantities shown are for one end of one reinforced concrete pipe (RCP) culvert. For multiple pipe culverts or for corrugated metal pipe (CMP) culverts, quantities will need to be adjusted. Riprap quantities are for contractor's information only.

MATERIAL NOTES:

Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel reinforcing in riprap concrete unless noted otherwise. Provide cross pipes that meet the requirements of ASTM A53 (Type E or S, Gr B), ASTM A500 (Gr B), or API 5LX52. Provide ASTM A307 bolts and nuts. Galvanize all steel components, except concrete reinforcing, after fabrication. Repair galvanizing damaged during transport or construction in accordance with the specifications.

GENERAL NOTES:

Cross pipes are designed for a traversing load of 10,000 pounds at yield as recommended by Research Report 280-2F, "Safety Treatment of Roadside Parallel-Drainage Structures", Texas Transportation Institute, March 1981. Safety end treatments (SET) shown herein are intended for use in those installations where out of control vehicles are likely to traverse the openings approximately perpendicular to the cross pipes. Construct concrete riprap and all necessary inverts in accordance with the requirements of Item 432, "Riprap". Payment for riprap and toewall is included in the Price Bid for each Safety End Treatment.


Texas Department of Transportation Bridge Division Standard

SAFETY END TREATMENT FOR 12" DIA TO 72" DIA PIPE CULVERTS TYPE II ~ PARALLEL DRAINAGE


SETP-PD

FILE: setppdse-20.dgn	DN: GAF	CK: CAT	DW: JRP	CK: GAF
©TxDOT February 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089,ETC	SH 71, ETC
DIST	COUNTY		SHEET NO.	
AUS	BASTROP		61	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

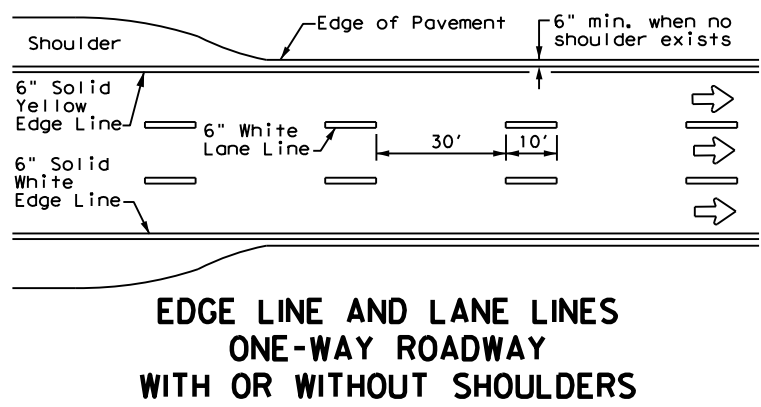


**EDGE LINE AND LANE LINES
ONE-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

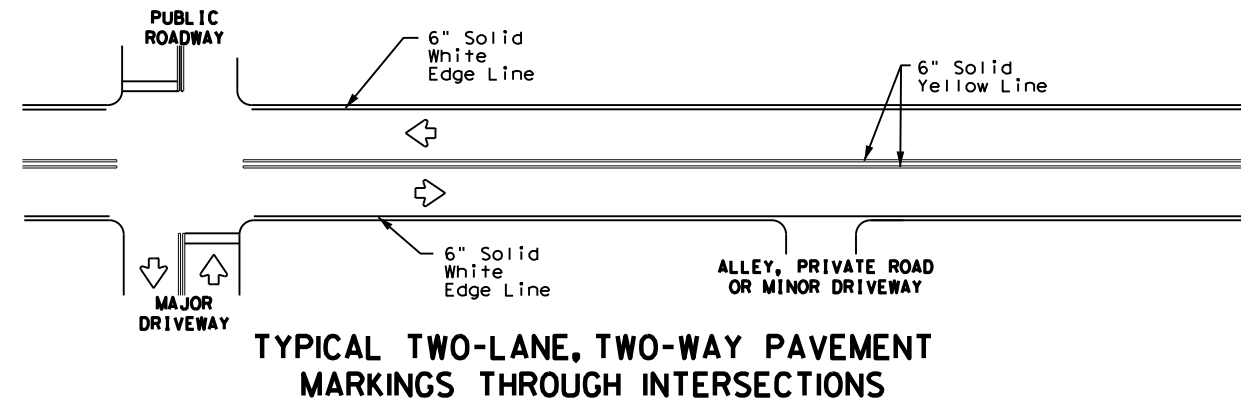


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

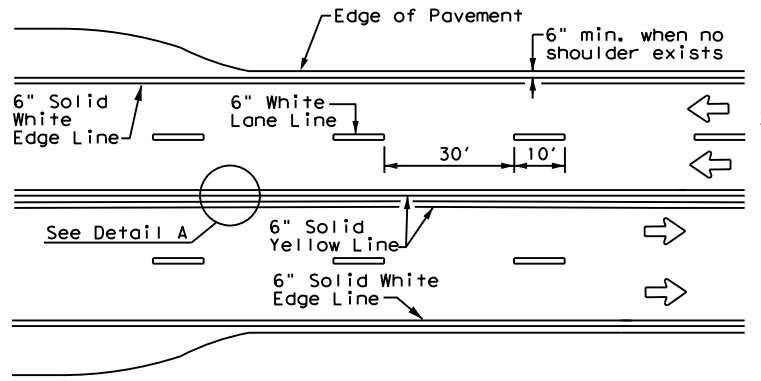


**CENTERLINE AND LANE LINES
FOUR LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

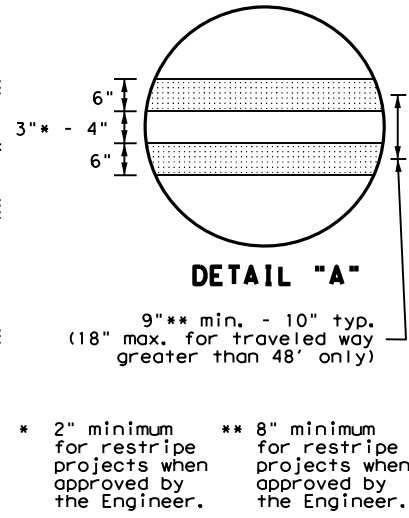


DETAIL "A"

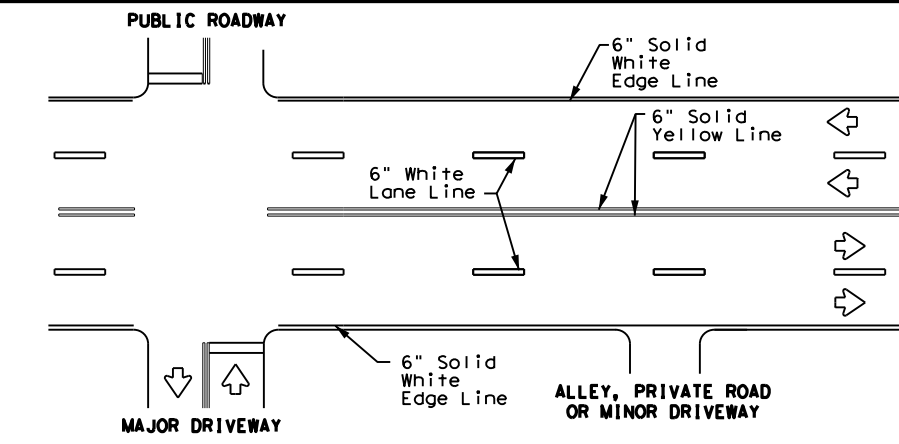


**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

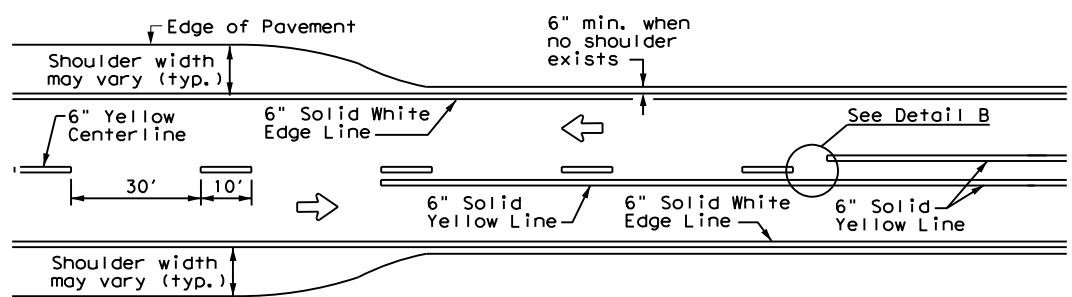


**TWO LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

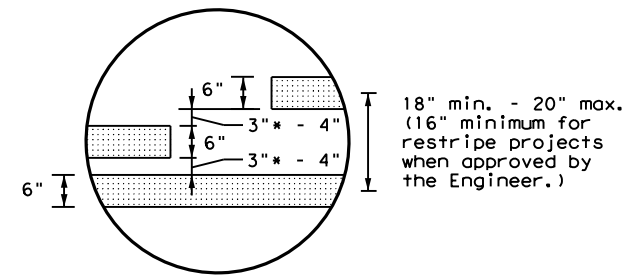

DETAIL "B"




YIELD LINES

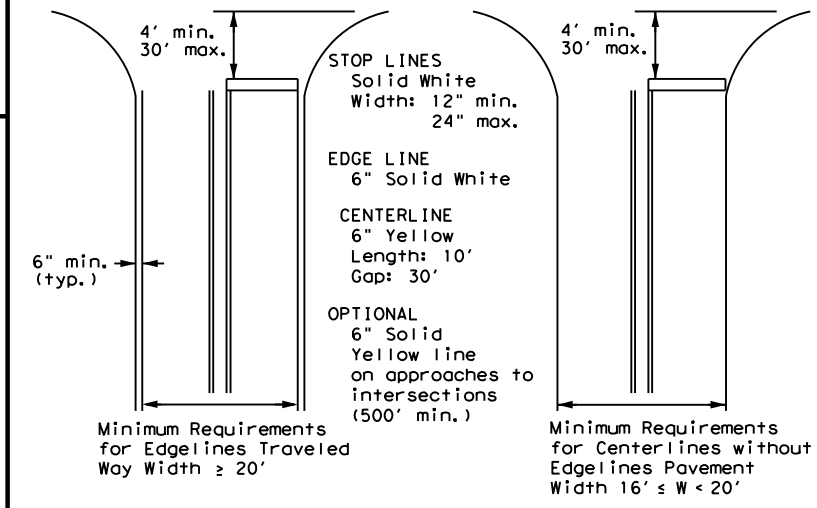

NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

**GUIDE FOR PLACEMENT OF STOP LINES,
EDGE LINE & CENTERLINE**
Based on Traveled Way and Pavement Widths
for Undivided Roadways

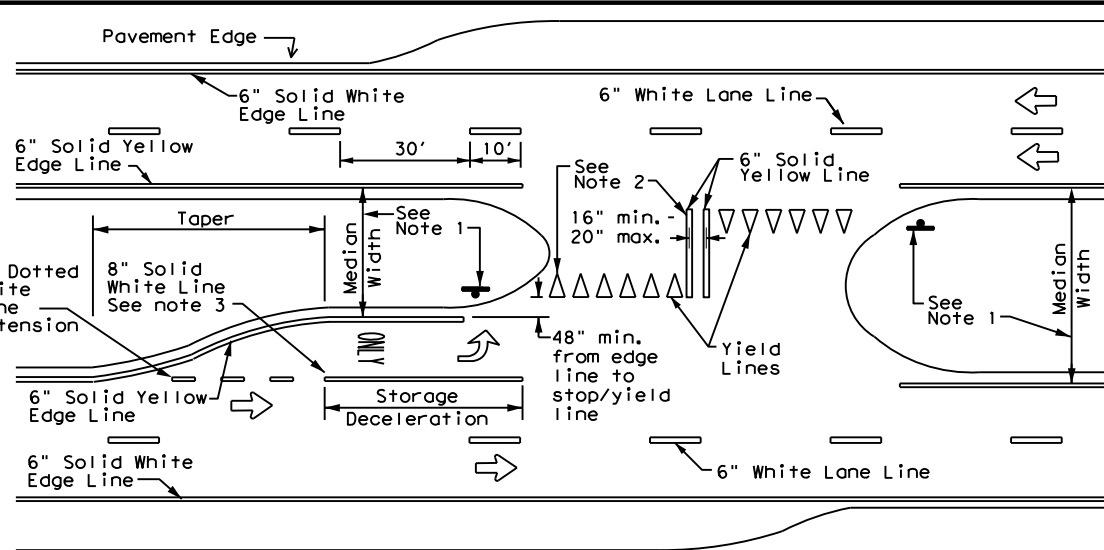

FOUR LANE DIVIDED ROADWAY CROSSOVERS

NOTES

- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

GENERAL NOTES

- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.



**TYPICAL STANDARD
PAVEMENT MARKINGS**


PM(1)-22

FILE: pm1-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
11-78 8-00 6-20	DIST	COUNTY	SHEET NO.	
8-95 3-03 12-22	AUS	BASTROP	62	
5-00 2-12				


DATE:
FILE:

REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

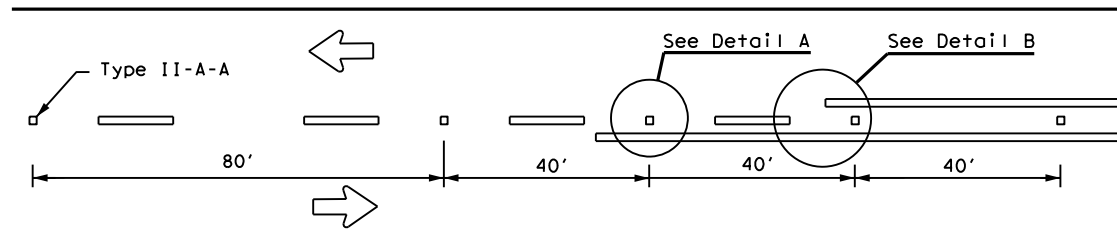

CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS

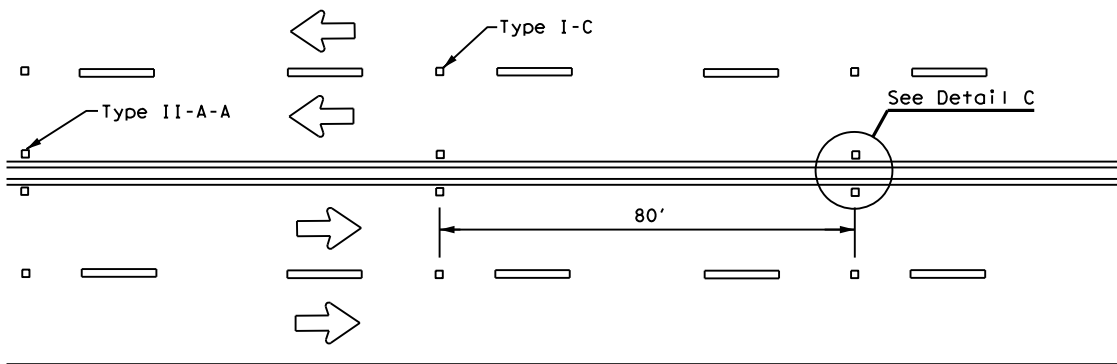


**CENTERLINE & LANE LINES
FOR FOUR LANE TWO-WAY ROADWAYS**

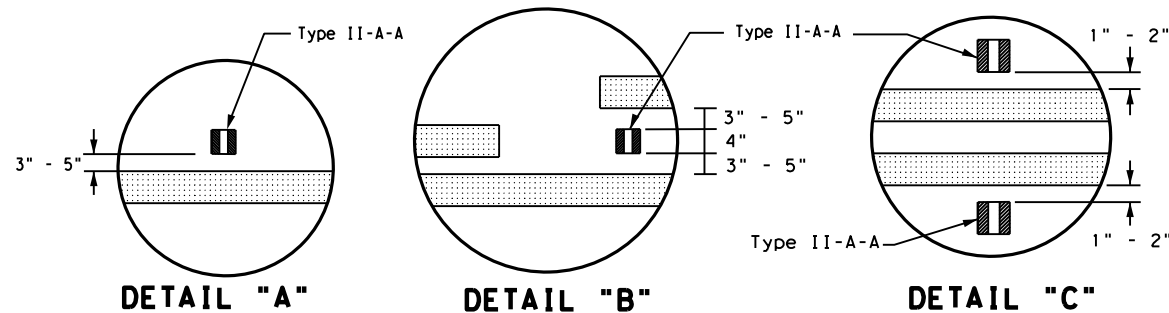


DETAIL "A"

DETAIL "B"

DETAIL "C"

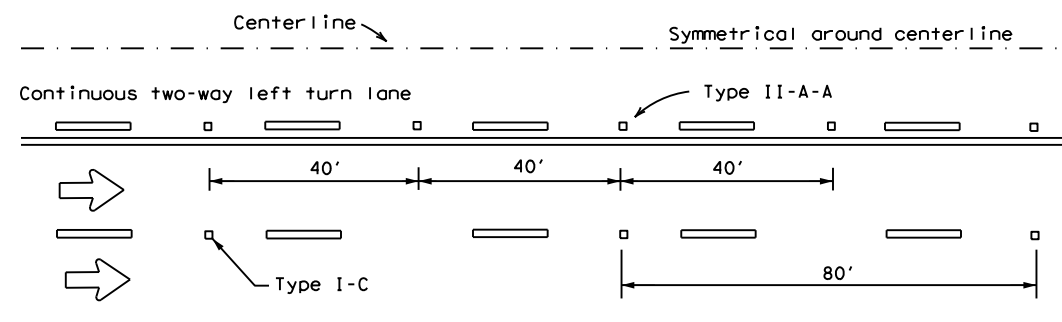


CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

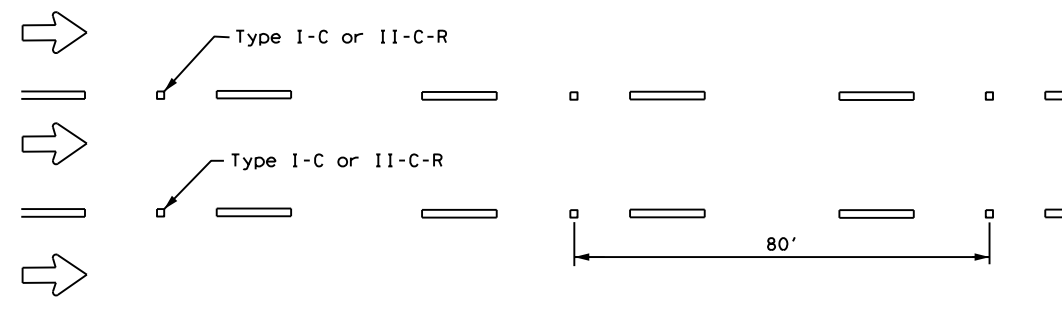


LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)

Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.
See Note 3.

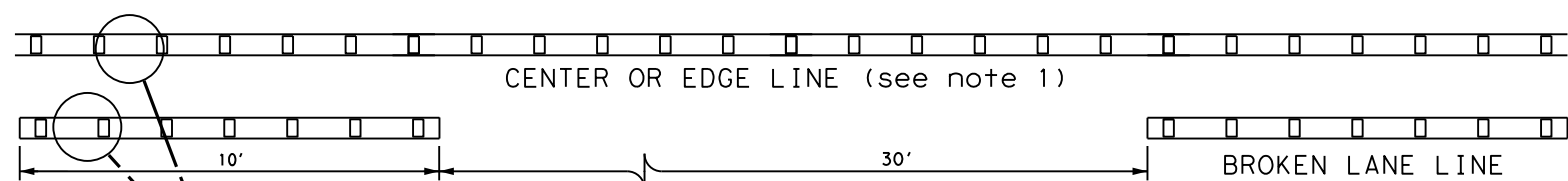

**REFLECTORIZED PROFILE
PATTERN DETAIL**
USING REFLECTIVE PROFILE PAVEMENT MARKINGS

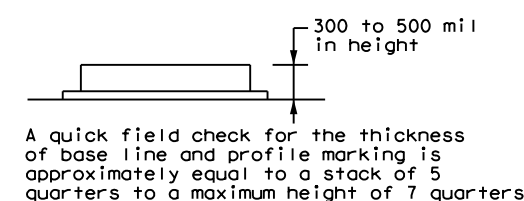

A quick field check for the thickness of base line and profile marking is approximately equal to a stack of 5 quarters to a maximum height of 7 quarters.


- NOTES**
1. Edge lines should typically be 6" wide and the materials shall be specified in the plans.
 2. Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

GENERAL NOTES


1. All raised pavement markers placed along broken lines shall be placed in line with and midway between the stripes.
2. On concrete pavements the raised pavement markers should be placed to one side of the longitudinal joints.
3. Use raised pavement marker Type I-C with undivided roadways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

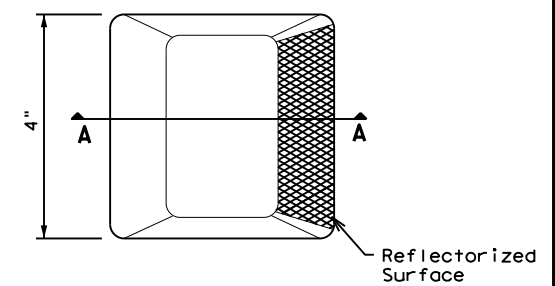

Type I (Top View)

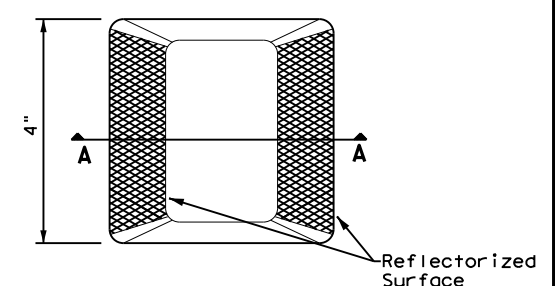

Type II (Top View)

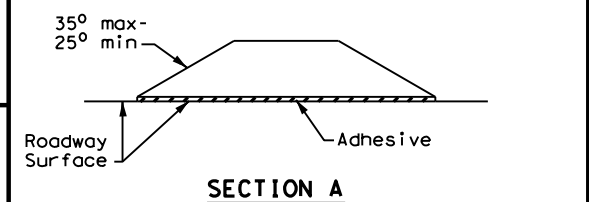

SECTION A

RAISED PAVEMENT MARKERS



**POSITION GUIDANCE USING
RAISED MARKERS
REFLECTORIZED PROFILE
MARKINGS
PM(2) - 22**

FILE: pm2-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
4-77 8-00 6-20	DIST	COUNTY	SHEET NO.	
4-92 2-10 12-22	AUS	BASTROP	63	
5-00 2-12				

DATE: \$DATE\$ \$TIME\$
FILE: \$FILE\$

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS				DELINEATORS				D & OM DESCRIPTIVE CODES			
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	DEVICE	SINGLE	DOUBLE	INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX (XX)			
										NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRFL = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount	
SHEETING: Yellow, White or Red Type B or C reflective sheeting				SHEETING: Yellow, White or Red Type B or C Reflective Sheeting						DIRECTION: If Required, BI = Bi-Directional, BR = Bi-Directional with red on back	
NOTE: 1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (fix). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.				POST TYPE: WC, YFLX, WFLX, GND						INSTL OM ASSM (OM-XX) (XXXX)XXX (XX)	
				MOUNT TYPE: GND, SRF						TYPE OF OBJECT MARKER: 1, 2, 3, or 4	

OBJECT MARKERS										
DEVICE	Type 1 (OM-1)		Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)	
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4		
SHEETING: Yellow-Type B _{FL} or C _{FL} Sheeting		SHEETING: Yellow - Type B or C Sheeting			SHEETING: Alternating acrylic black and retroreflective yellow - Type B _{FL} or C _{FL} Sheeting			SHEETING: Red -Type B _{FL} or C _{FL} Sheeting		
POST TYPE: TWT		POST TYPE: WC			POST TYPE: WFLX			POST TYPE: TWT		
MOUNT TYPE: WAS, WAP		MOUNT TYPE: GND			MOUNT TYPE: GND, SRF			MOUNT TYPE: WAS, WAP		

DEPARTMENTAL MATERIAL SPECIFICATIONS	
FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE: Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.
DEVICE	GF1	GF2	CTB	W1-8				W1-6	
SHEETING: Yellow, White, Red			SHEETING: Yellow, White, Red				SHEETING: Yellow, White, Red		
NOTE: 1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			NOTE: 1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).						
SIZE (W x L): GF1 (18" x 24"), GF2 (24" x 30"), CTB (30" x 36")			SIZE (W x L): W1-8 (18" x 24", 24" x 30", 30" x 36", 36" x 48")				SIZE (W x L): W1-6 (48" x 24", 60" x 30")		
MOUNTING HEIGHT: 4'-0" or 7'-0"			MOUNTING HEIGHT: 4'-0" or 7'-0"				MOUNTING HEIGHT: 7'-0"		



DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION

D & OM(1)-20

FILE: dom1-20.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT	CR: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265 05	089, ETC	SH 71, ETC	
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	AUS	BASTROP	64	

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

POST TYPE AND SUPPORT FOUNDATION DETAILS








TYPE OF BARRIER MOUNTS

WING CHANNEL (WC)

FLEXIBLE POSTS (YFLX, WFLX)

WEDGE ANCHOR SYSTEMS

GUARD FENCE ATTACHMENT

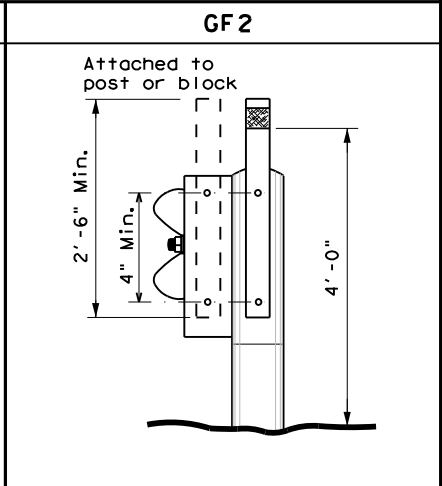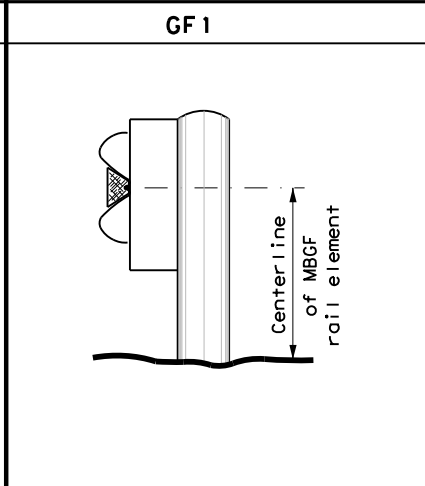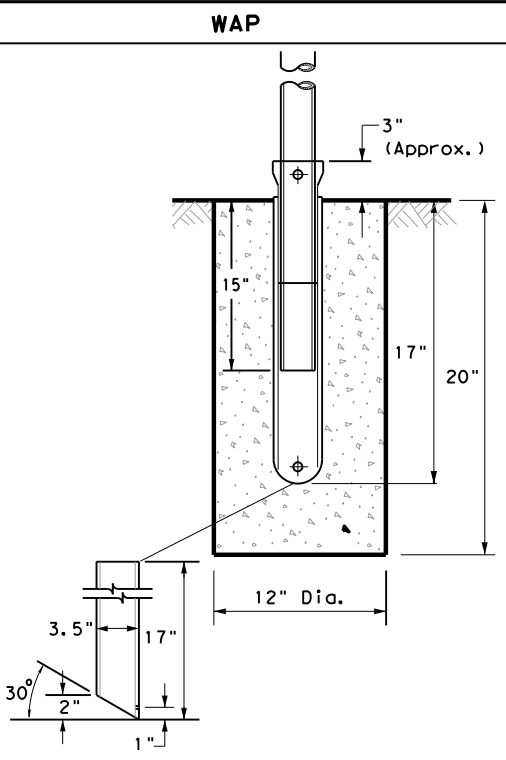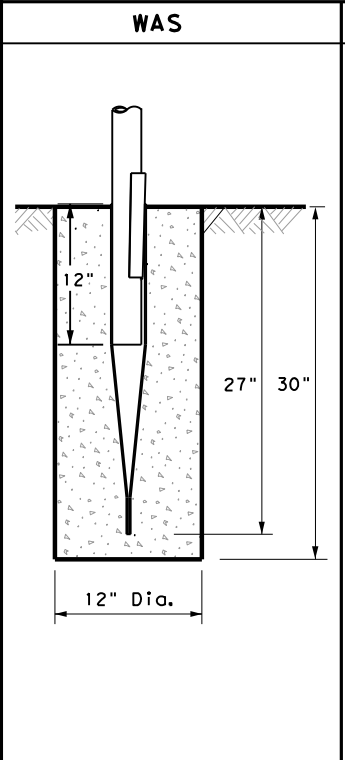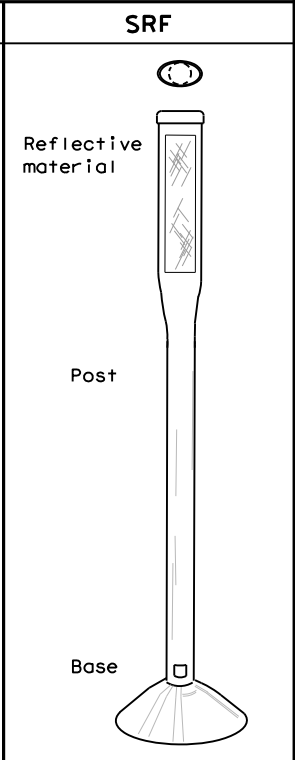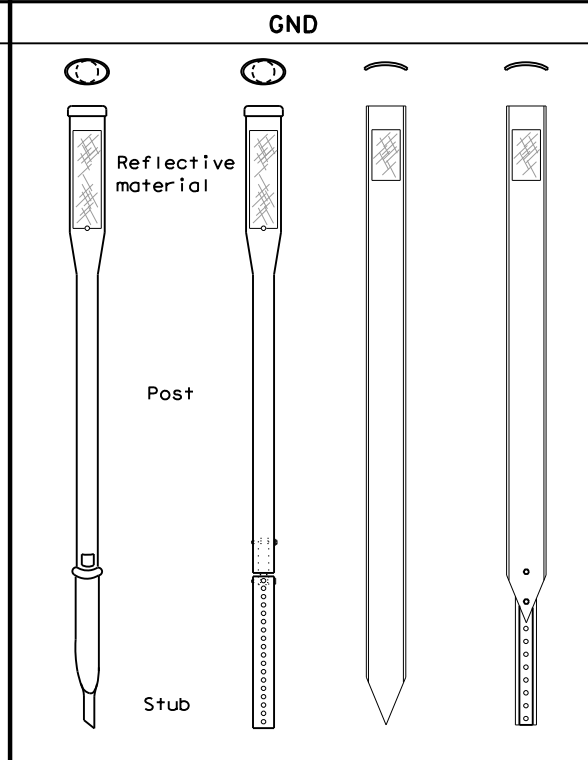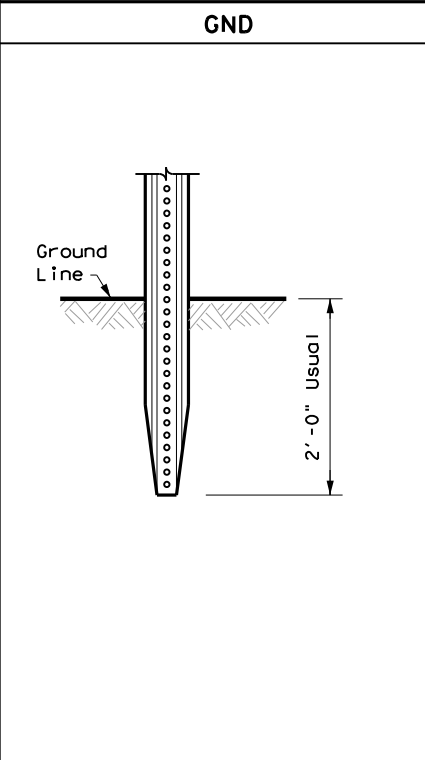

NOTES

1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only.
2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.

EMBEDDED **SURFACE MOUNT**

NOTES


1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices.
2. Install per manufacturer's recommendations.
3. Post length may vary to meet field conditions.
4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.

STEEL **PLASTIC**

NOTE

1. Install per manufacturer's recommendations.


CONCRETE TRAFFIC BARRIER (CTB)

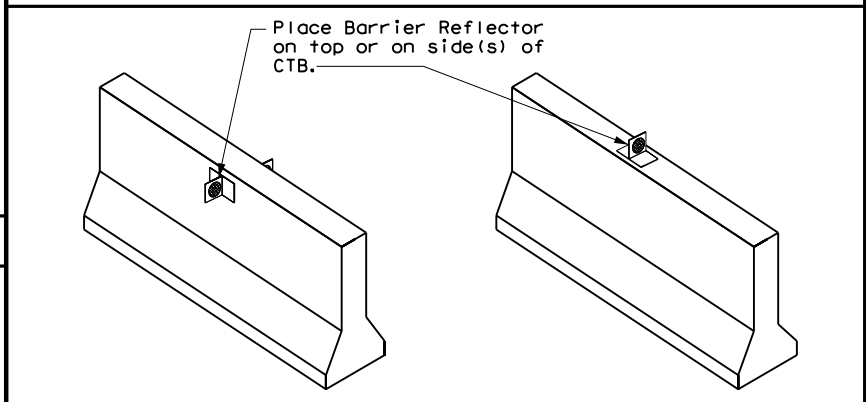


GENERAL NOTES

1. Place delineators on a section of roadway at a consistent distance from the edge of pavement.
2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction.
3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible.
4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation.
5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface.
6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.


TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS

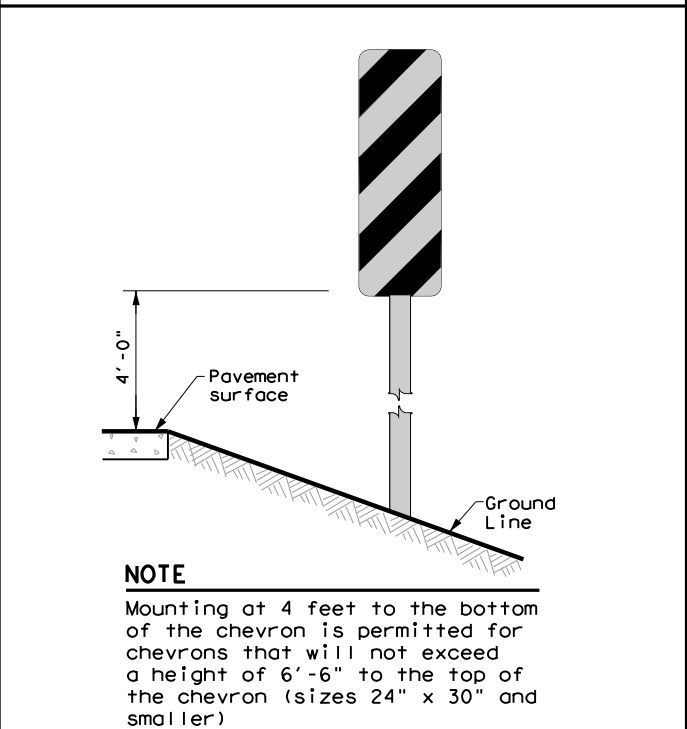

CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN

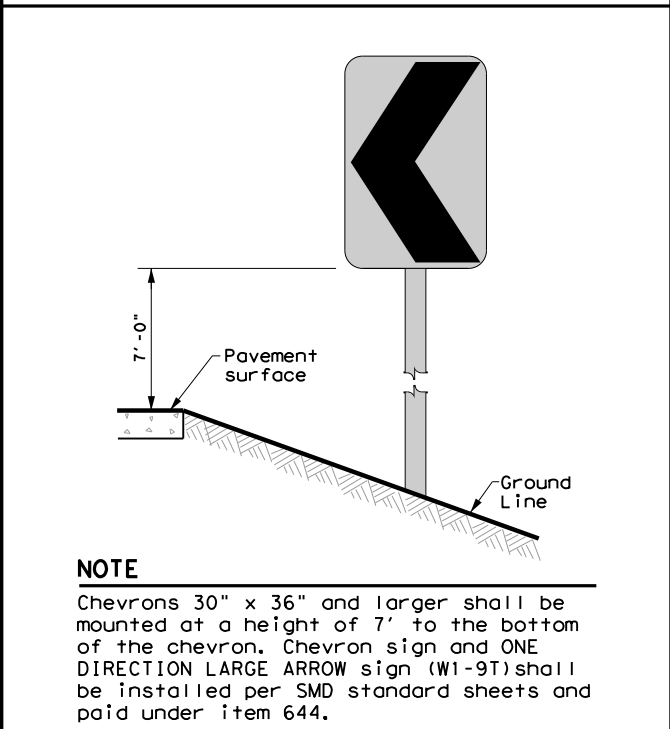

DELINEATORS AND TYPE 2 OBJECT MARKERS

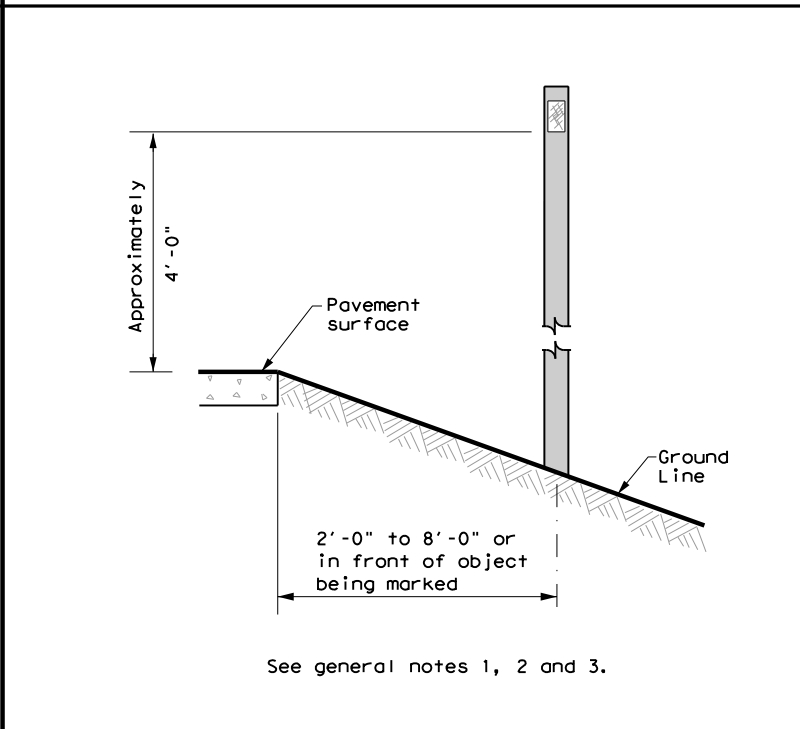

Texas Department of Transportation

Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER INSTALLATION

D & OM(2)-20


FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265 05	089, ETC	SH 71, ETC	
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	AUS	BASTROP	65	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	• RPMs	• RPMs
15 MPH & 20 MPH	• RPMs and One Direction Large Arrow sign	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	• RPMs and Chevrons


SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

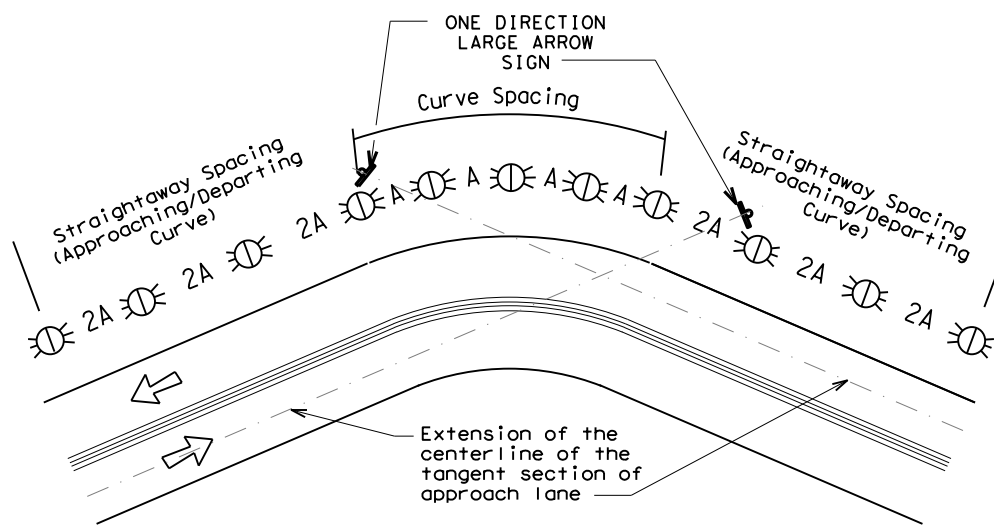

NOTE

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

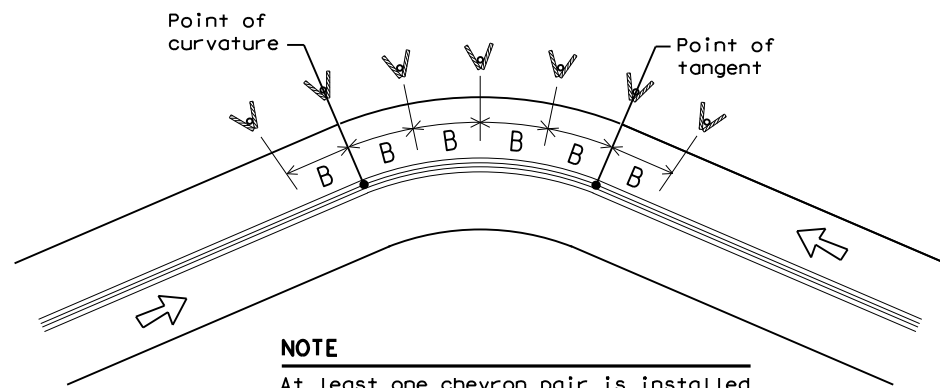

NOTE

At least one chevron pair is installed beyond the point of tangent in tangent section.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy/Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

NOTES

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign

Texas Department of Transportation
Traffic Safety Division Standard

DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(3)-20


FILE: dom3-20.dgn	DW: TxDOT	CK: TxDOT	OW: TxDOT	CR: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265 05	089, ETC	SH 71, ETC	
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	AUS	BASTROP	66	

DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

CROSSOVERS

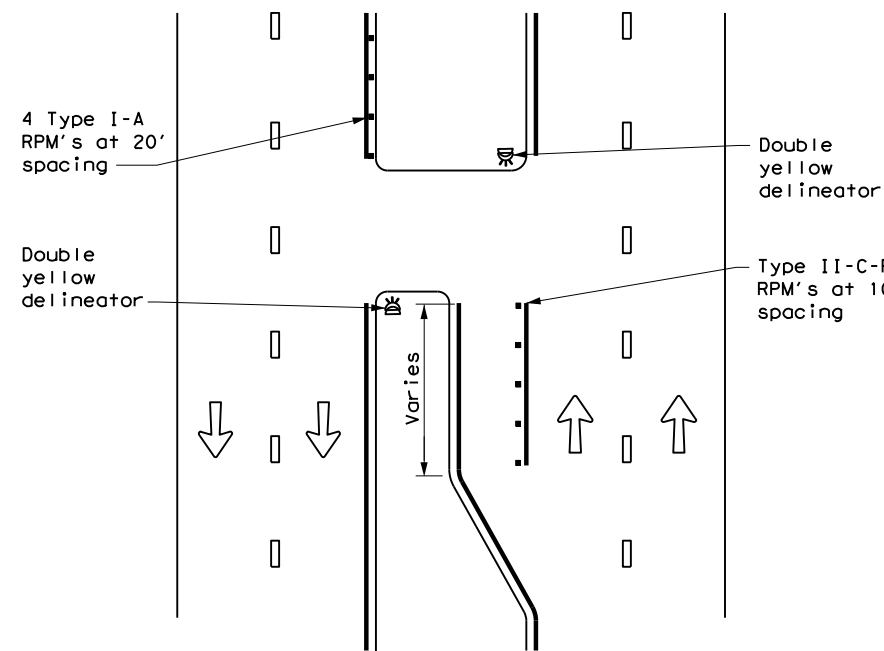


DETAIL 1

FOR CULVERTS WITHOUT MBGF

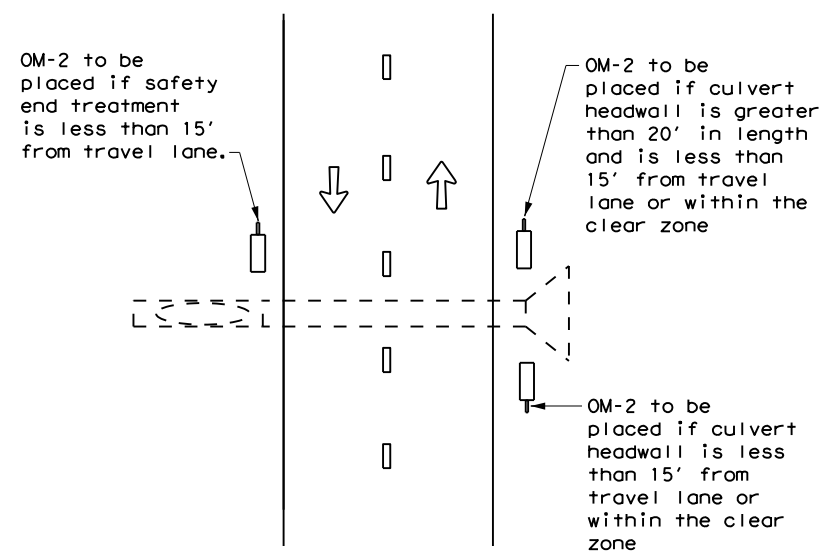


DETAIL 2

FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES

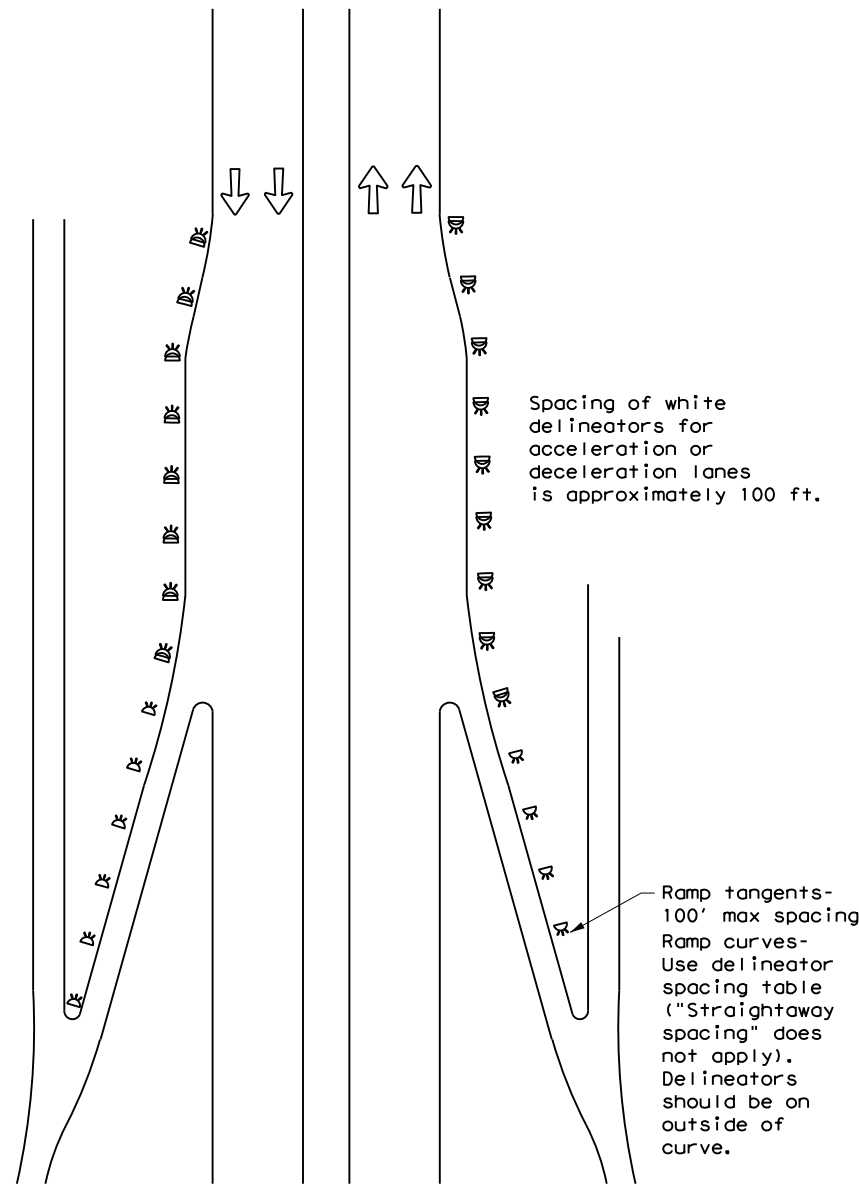


DETAIL 3

TYPICAL APPLICATION OF DEAD END BARRICADE

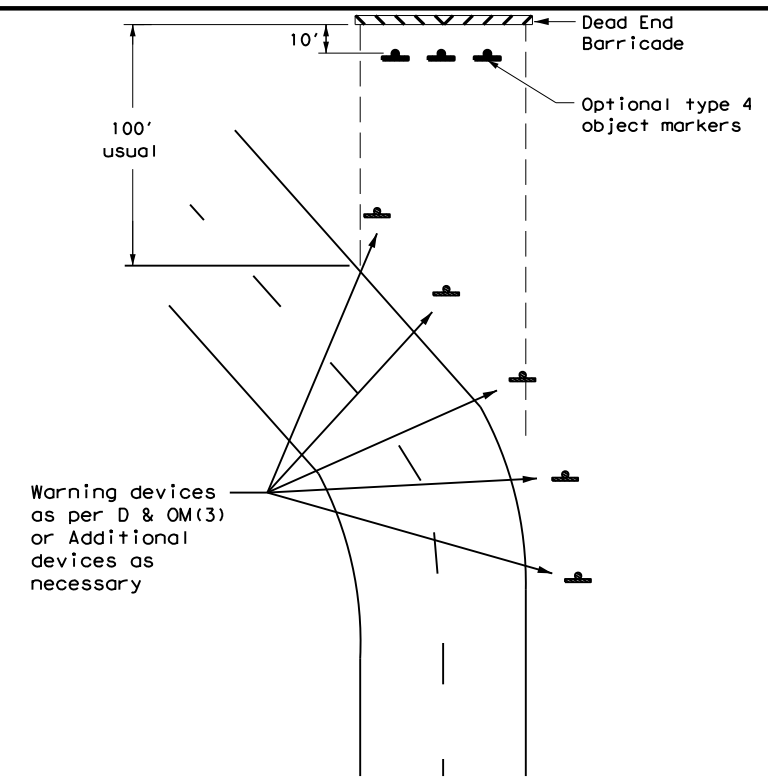

DETAIL 4

TYPICAL DEAD END BARRICADE INSTALLATION

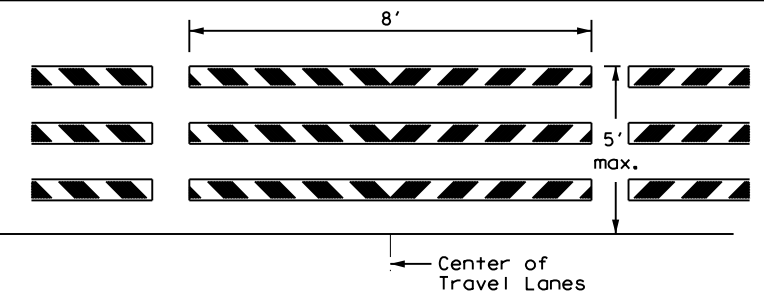

NOTES

- Barricade striping shall be red and white reflective sheeting for all permanent road closures.
- Barricade striping is red and white sloping toward the center of the roadway.
- Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

DETAIL 5

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator




DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(4) -20

FILE: dom4-20.dgn	DN: TXDOT	CK: TXDOT	OW: TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
3-15	DIST	COUNTY	SHEET NO.	
7-20	AUS	BASTROP	67	


**TWO-WAY, TWO LANE ROADWAY
WITH REDUCED WIDTH APPROACH RAIL**

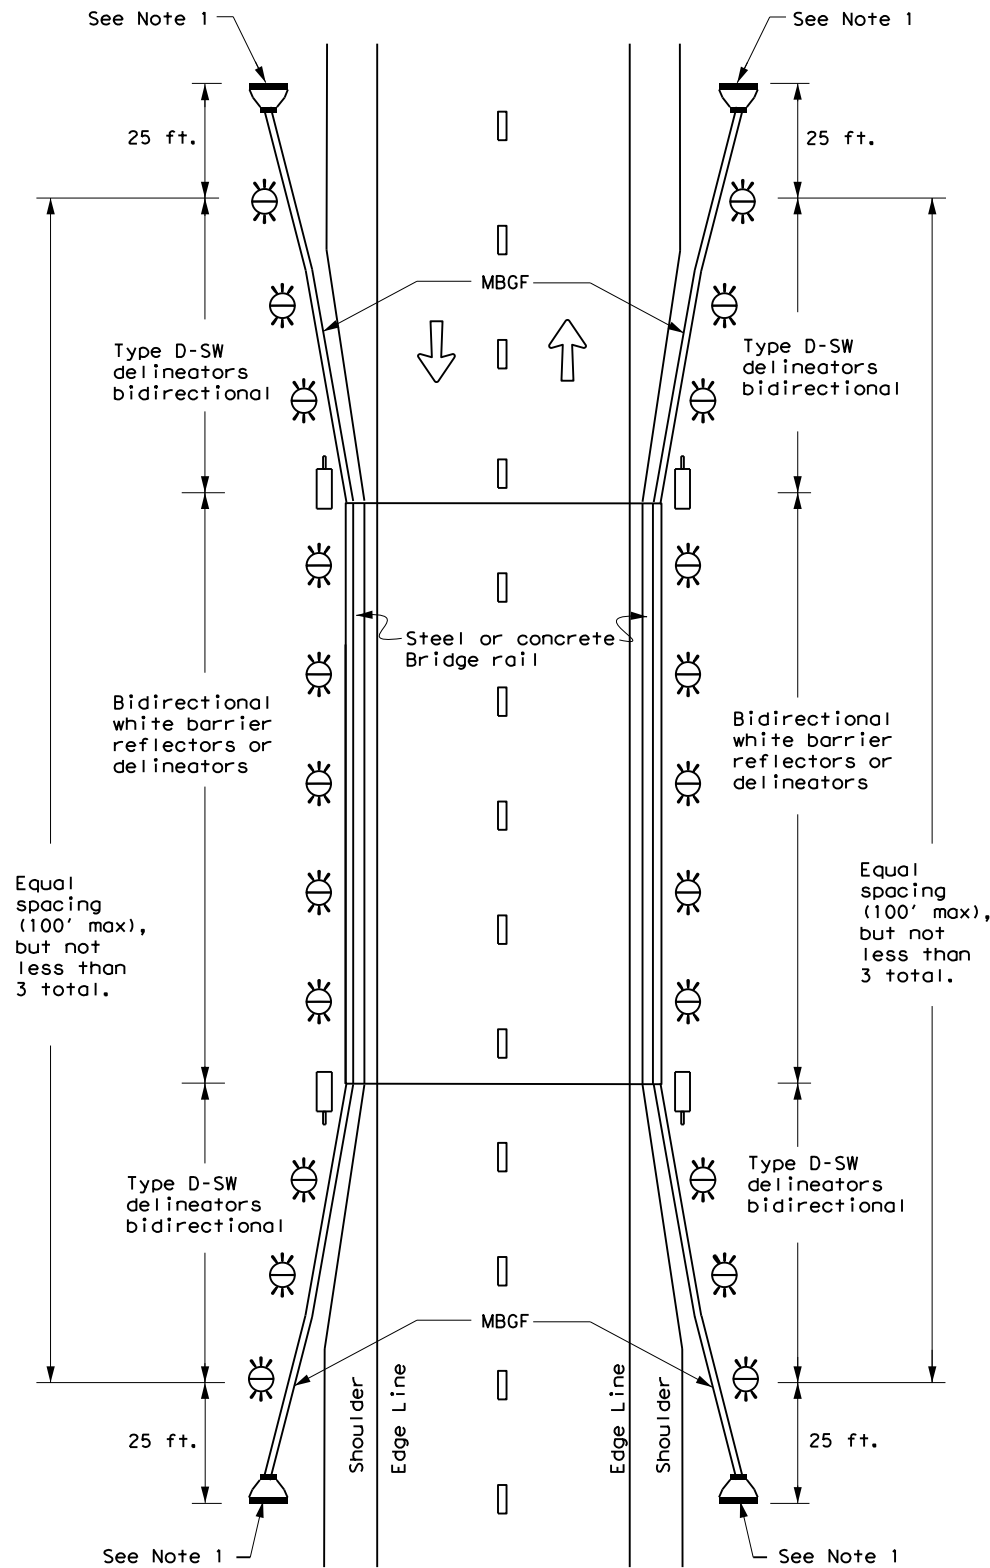

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.


**TWO-WAY, TWO LANE ROADWAY
WITH METAL BEAM GUARD FENCE (MBGF)**

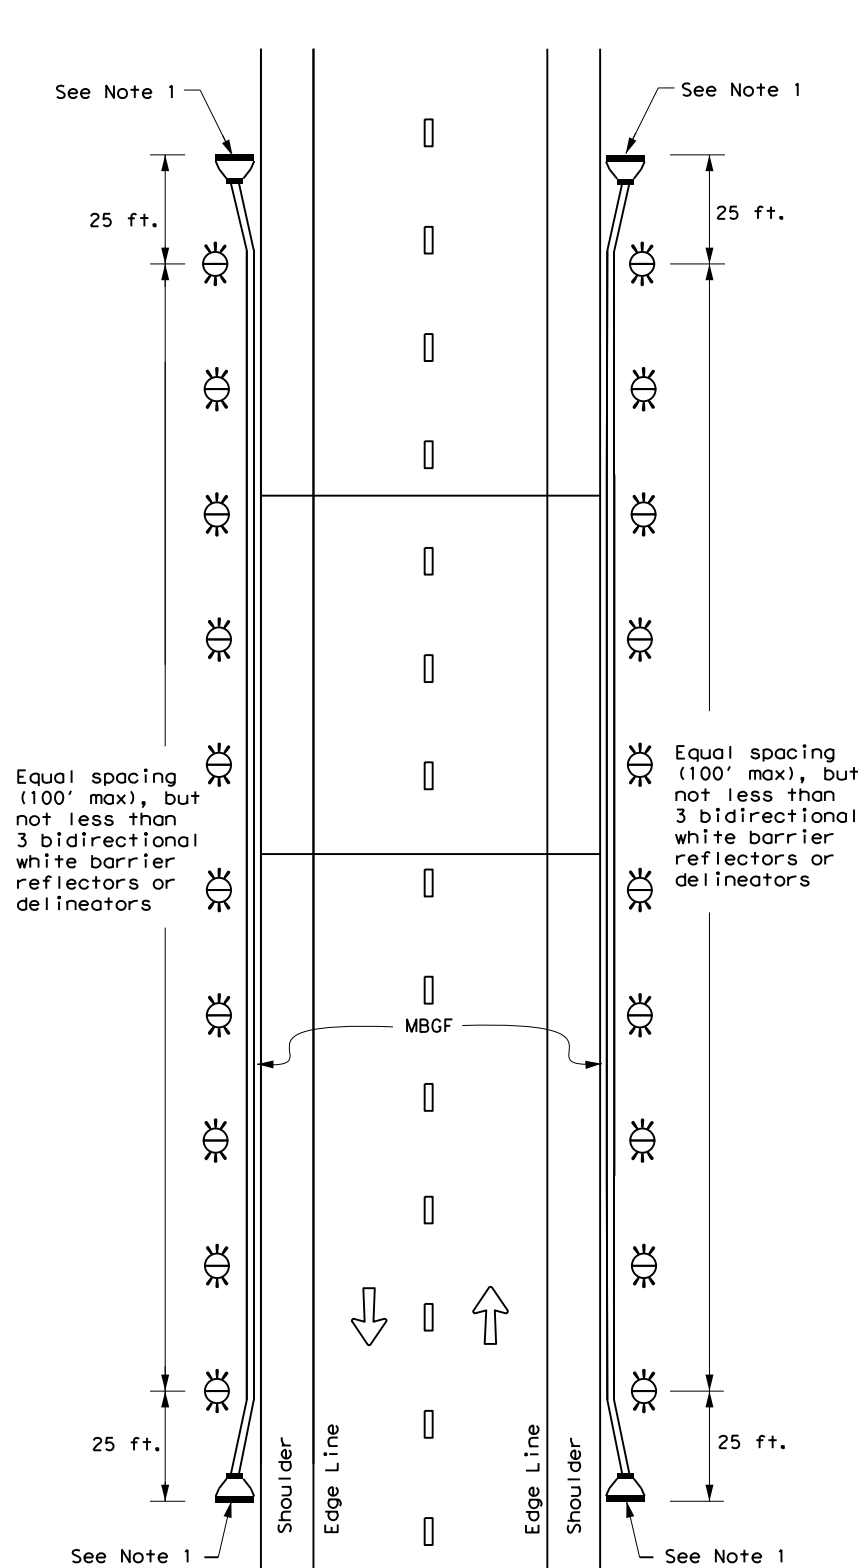

NOTE:

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**TWO-WAY, TWO LANE ROADWAY
BRIDGE WITH NO APPROACH RAIL**

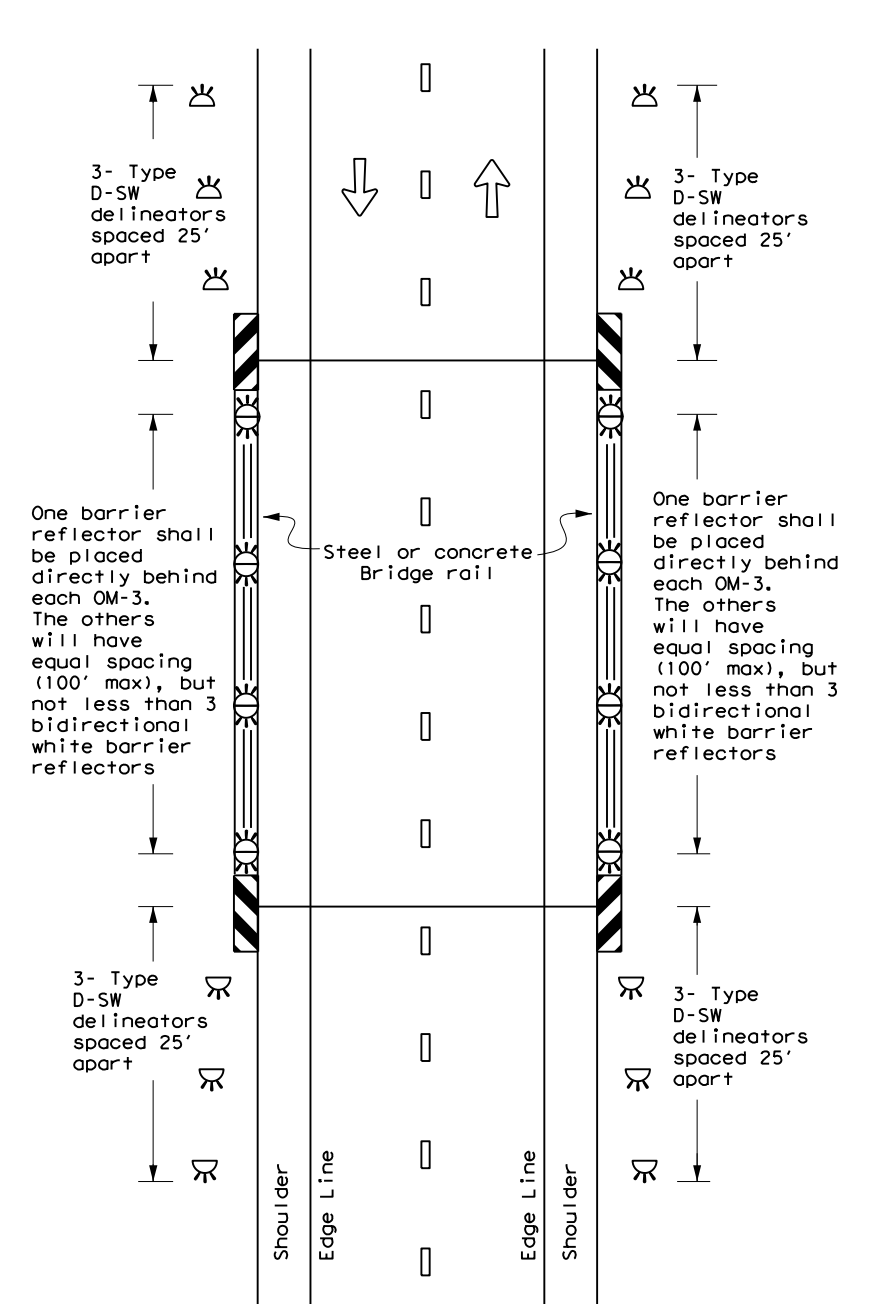

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow



**DELINEATOR &
OBJECT MARKER
PLACEMENT DETAILS**

D & OM(5)-20


FILE: dom5-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
©TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	0265	05	089, ETC	SH 71, ETC
7-20	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	68	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


CONTINUOUS CONCRETE OR STEEL BARRIER

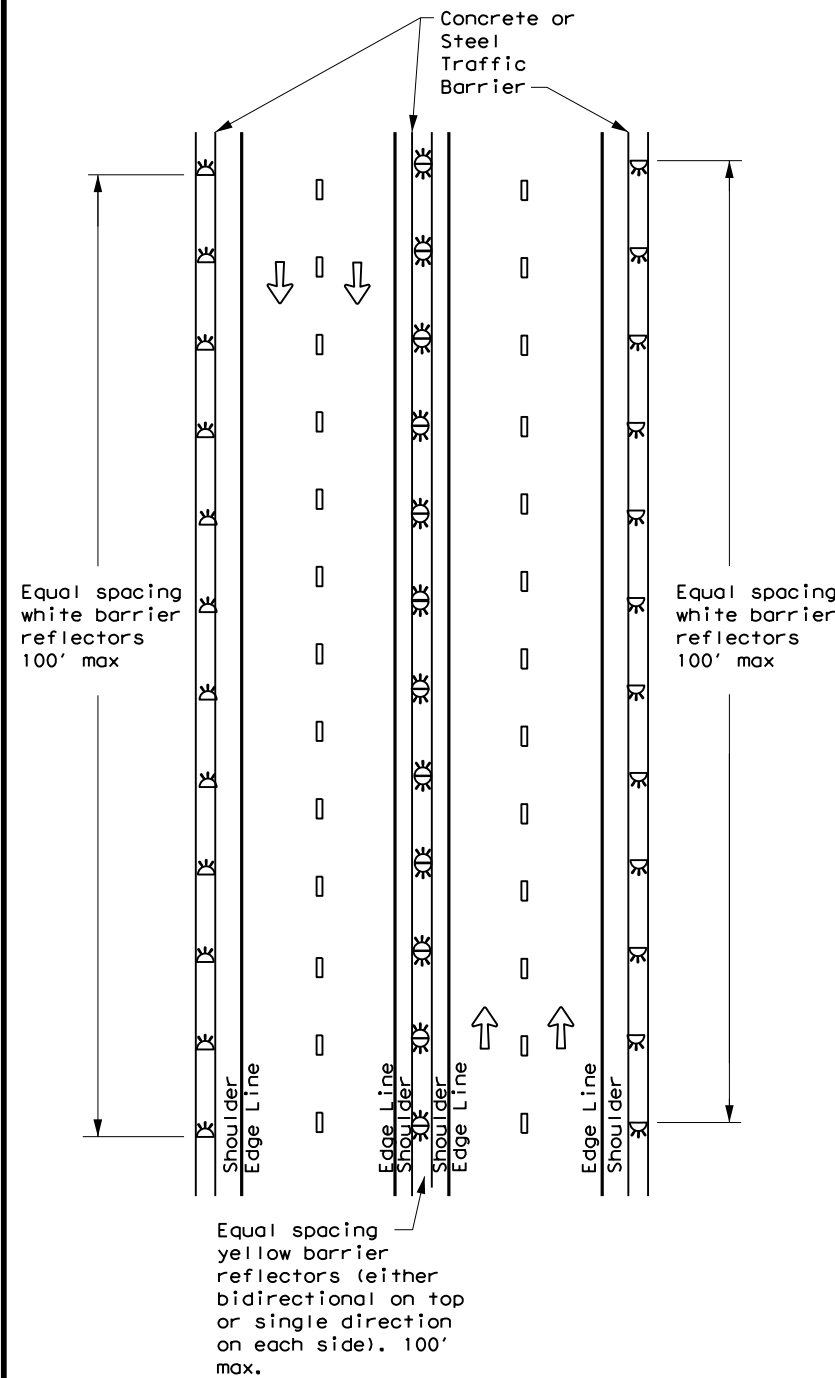


MULTI-LANE UNDIVIDED, TWO-WAY ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

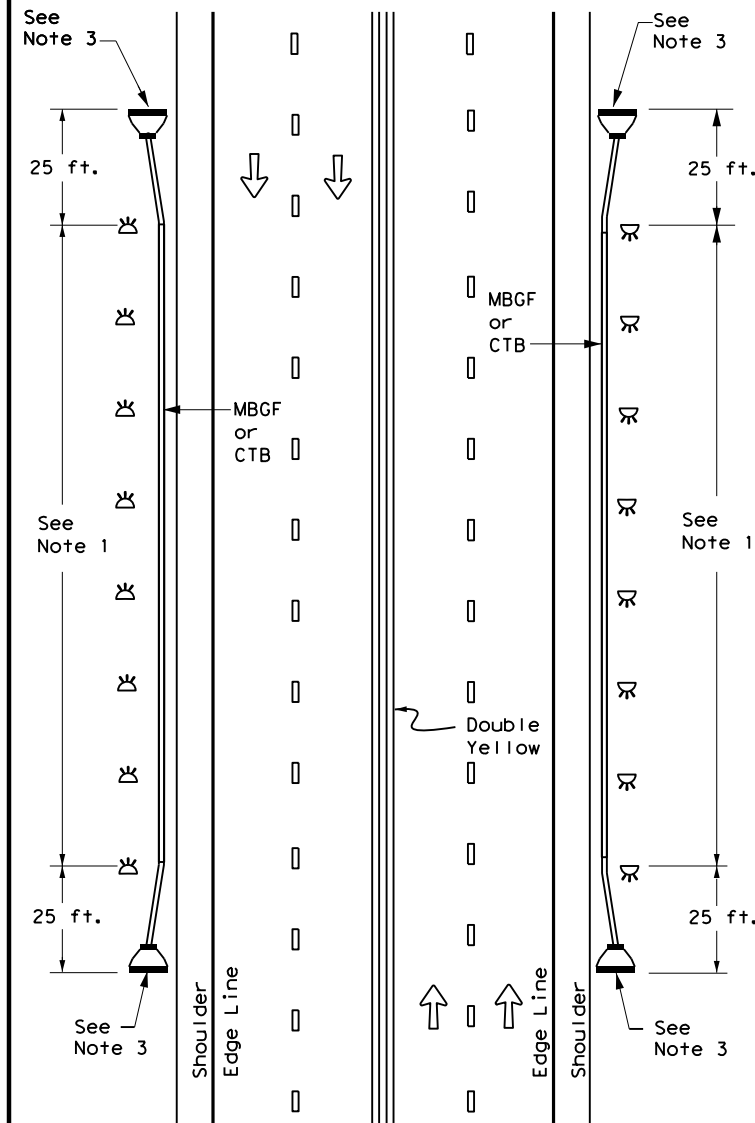

DIVIDED ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

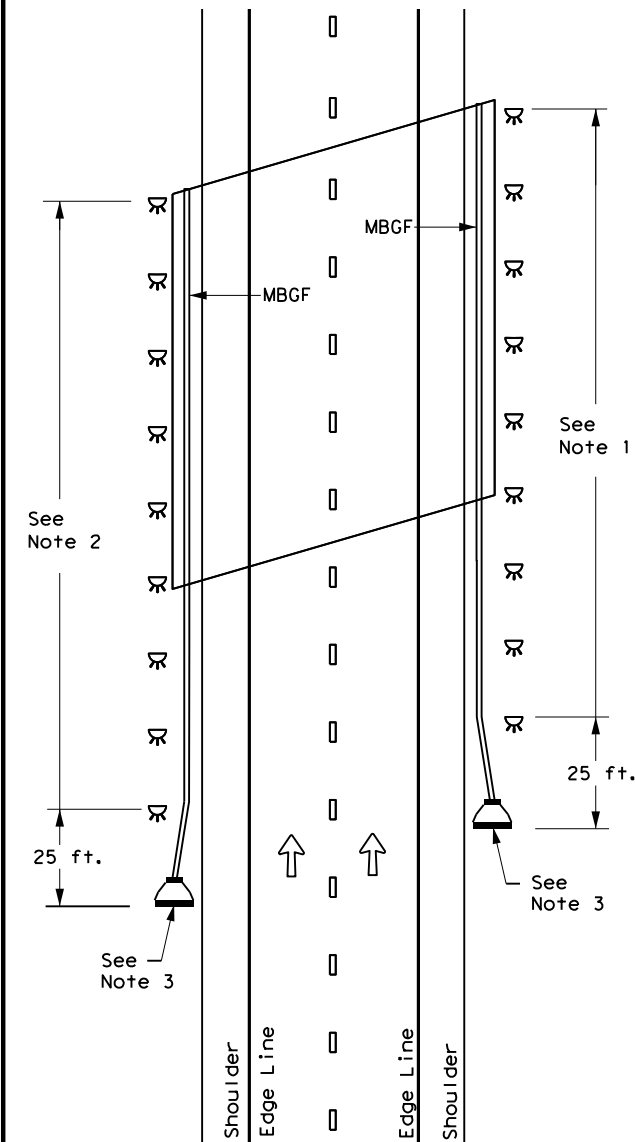

EMERGENCY CROSSOVER

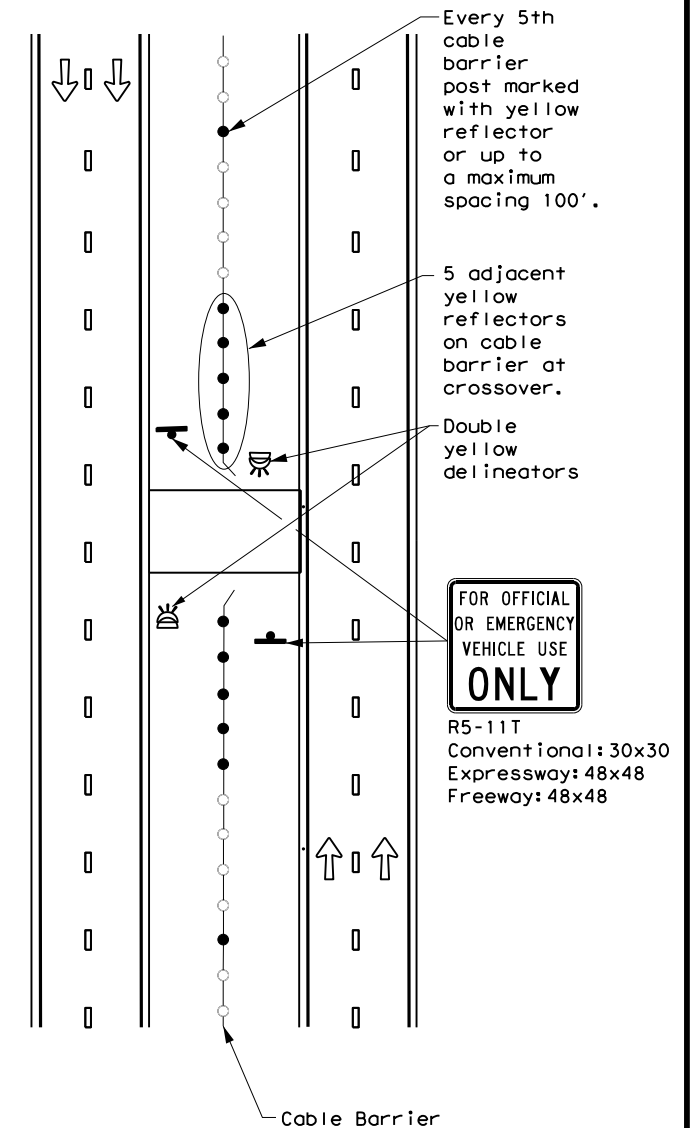

NOTES

1. Equal spacing (100' max), but not less than 3 single directional white barrier reflectors or delineators. On Continuous Barrier, equal spacing (100' max.)
2. Equal spacing (100' max), but not less than 3 single directional yellow barrier reflectors or delineators.
3. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow










DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(6)-20

FILE: dom6-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
7-20	REVISIONS	0265	05	089, ETC SH 71, ETC
	DIST	COUNTY	SHEET NO.	
	AUS	BASTROP	69	

DATE:
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

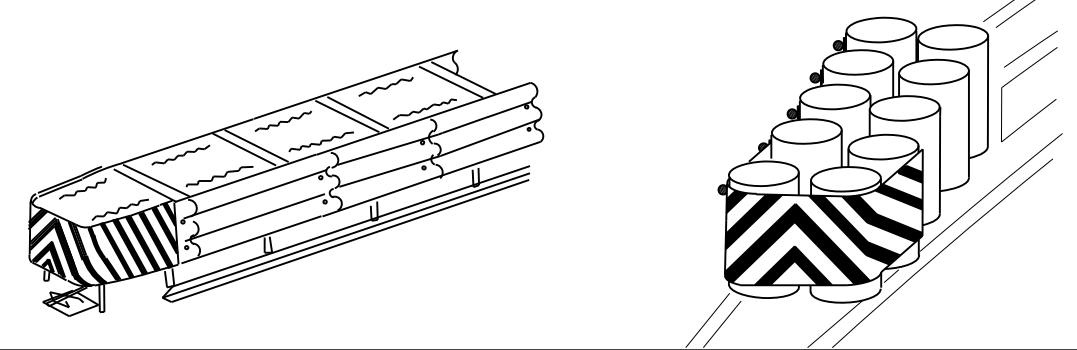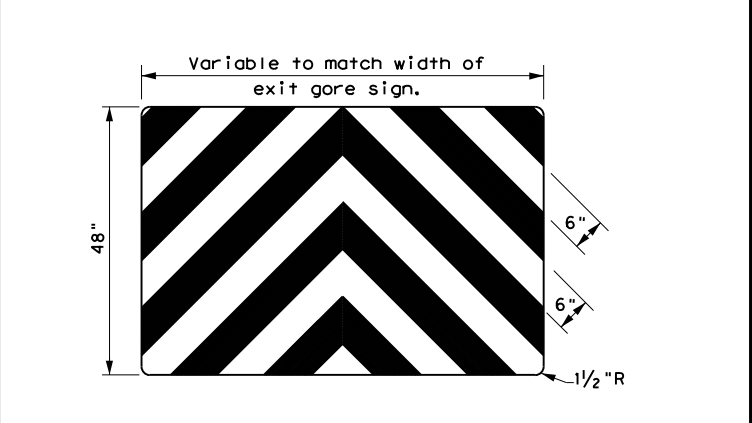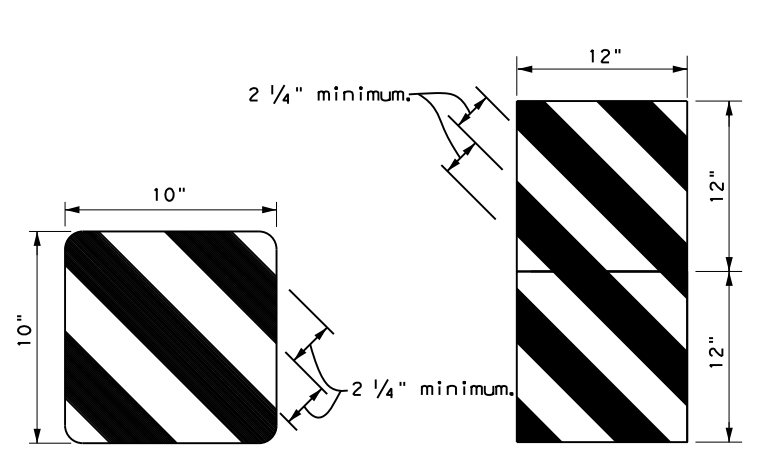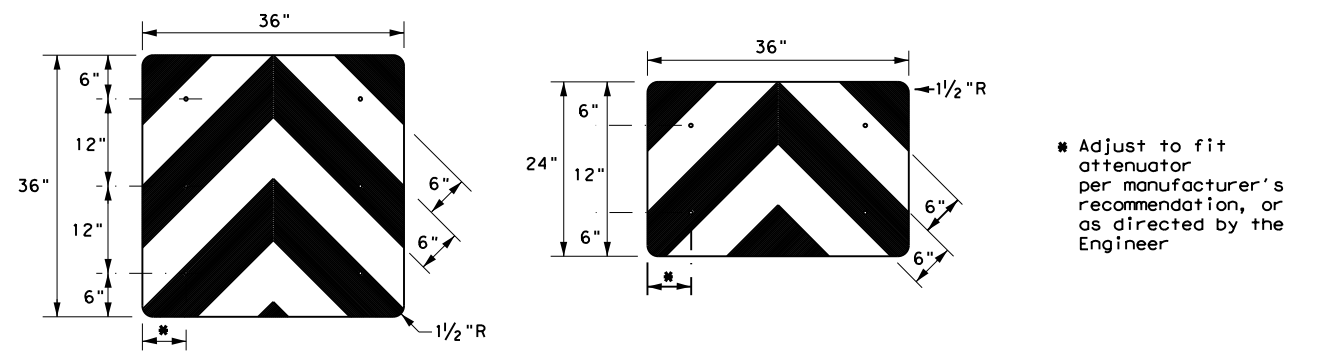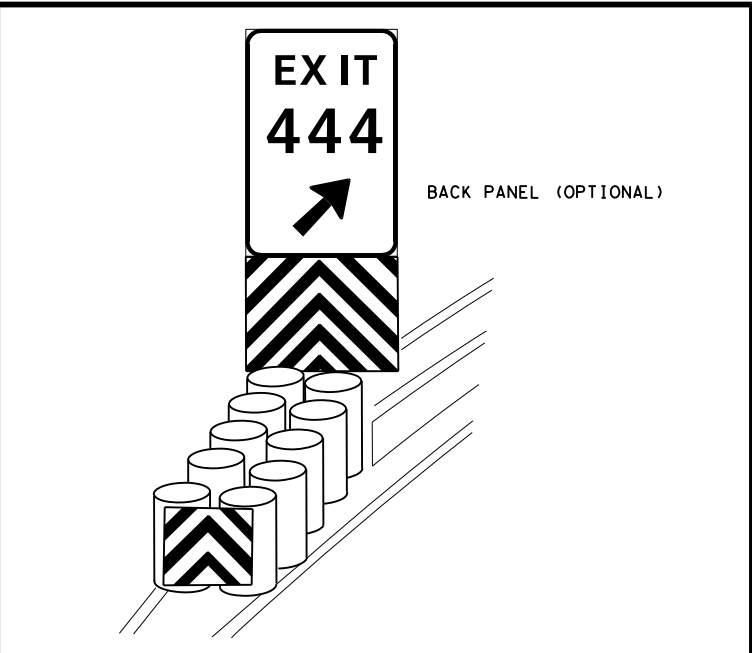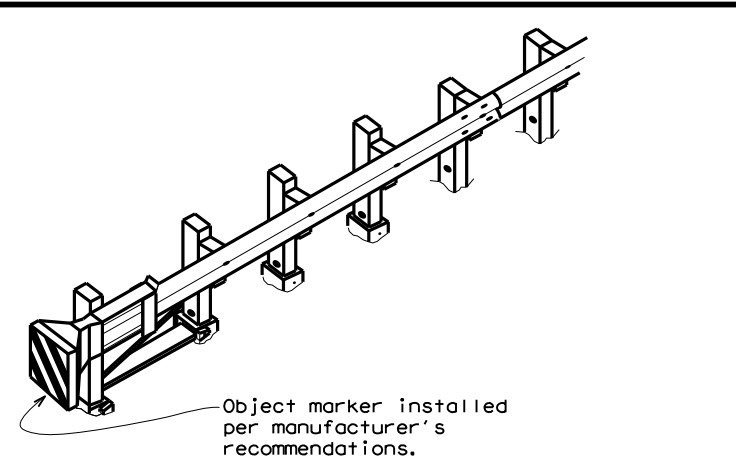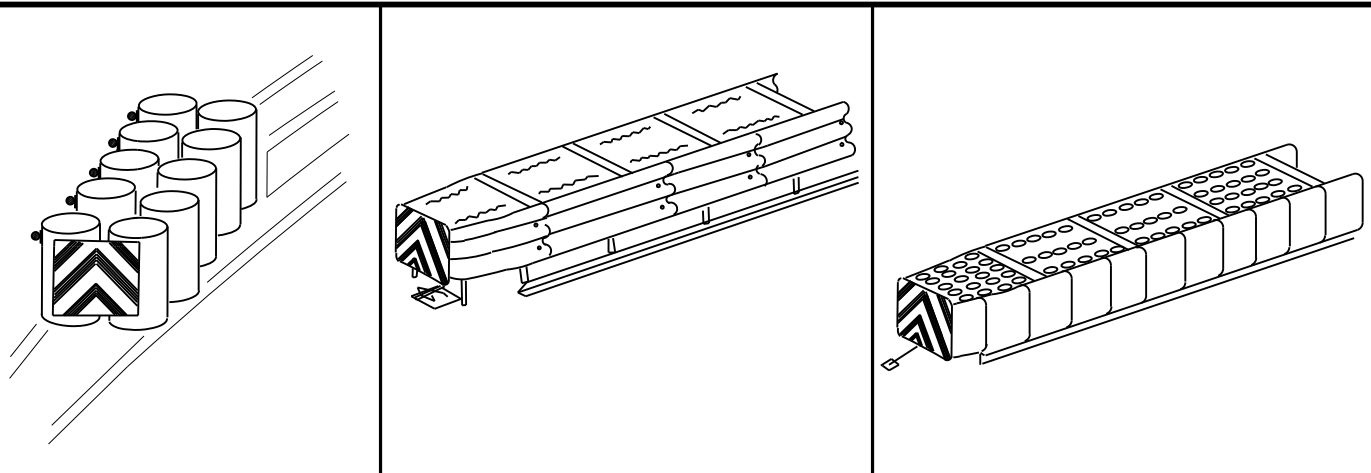


OBJECT MARKERS SMALLER THAN 3 FT²

NOTES

- Object Markers shall conform to the Texas MUTCD and meet the color and reflectivity requirement of Department Material Specification DMS 8300. Background shall be yellow reflective sheeting (Type B or C) and Chevron shall be black.
- Object Markers may be fabricated from adhesive backed reflective sheeting applied directly to guardrail end treatment, or applied directly to an "end cap" as per the manufacturer's recommendation. Direct applied sheeting shall provide a smooth surface and have no wrinkles, air bubbles, cuts or tears. A radius at the corners is not required for direct applied sheeting.
- Object Marker size may be reduced to fit smaller devices. Width of alternating black and yellow stripes are typically 6". Object Markers smaller than 3ft may have reduced width stripes of a minimum of 2 1/4".
- Pop rivets, screws, or nuts and bolts may be used to attach object markers and reflectors. Holes, slots or other openings may be cut or drilled through object markers to allow cable or other attachments.
- Object Marker at nose of attenuator is subsidiary to the attenuator.
- See D & OM (1-4) for required barrier reflectors.

NOTES

- Spacing should be adjusted to attach through centerline of drum, per attenuator manufacturer's recommendation, or as directed by the Engineer.
- Mounting should be flush with top of attenuator. Minimum size 96" x 24".

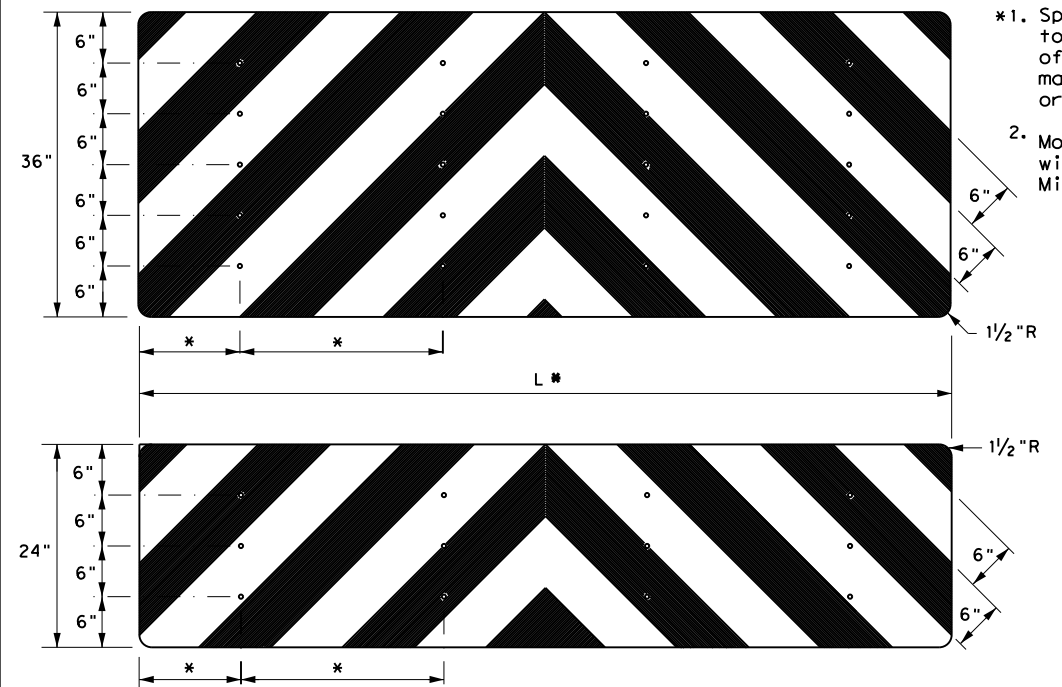


		Traffic Safety Division Standard	
DELINEATOR & OBJECT MARKER FOR VEHICLE IMPACT ATTENUATORS D & OM(VIA) -20			
FILE: domvia20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT December 1989	CONT	SECT	JOB
REVISIONS		0265 05	089, ETC
4-92 8-04	DIST	COUNTY	SHEET NO.
8-95 3-15	AUS	BASTROP	70
4-98 7-20			
20G			

DATE:
FILE:


DISCLAIMER: This standard is made by TxDOT for any purpose whatsoever. The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE
FILE

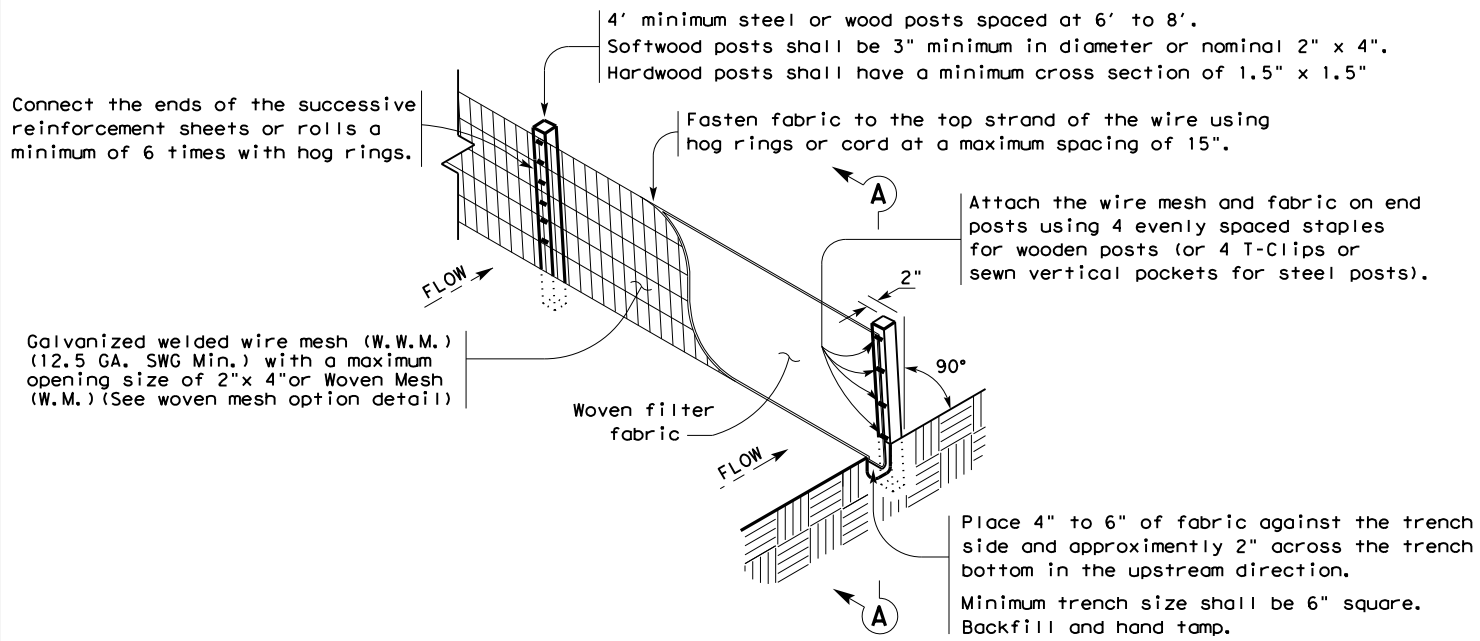

TEMPORARY SEDIMENT CONTROL FENCE

SCF

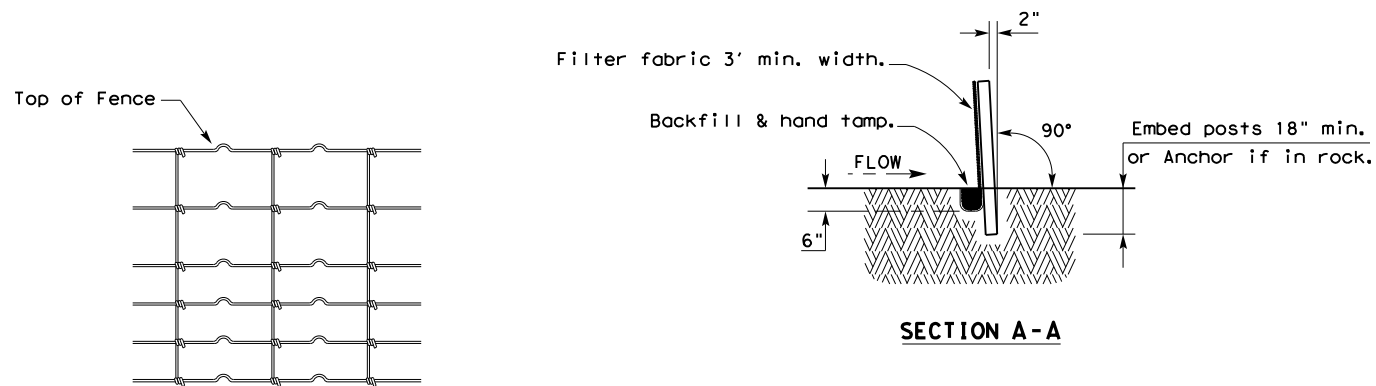

HINGE JOINT KNOT WOVEN MESH (OPTION) DETAIL

Galvanized hinge joint knot woven mesh (12.5 GA. SWG Min.) requires a minimum of five horizontal wires spaced at a maximum of 12 inches apart and all vertical wires spaced at a maximum of 12 inches apart.

SEDIMENT CONTROL FENCE USAGE GUIDELINES

A sediment control fence may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A 2 year storm frequency may be used to calculate the flow rate to be filtered.

Sediment control fence should be sized to filter a maximum flow through rate of 100 GPM/FT². Sediment control fence is not recommended to control erosion from a drainage area larger than 2 acres.


LEGEND

Sediment Control Fence

SCF

GENERAL NOTES


1. Vertical tracking is required on projects where soil distributing activities have occurred unless otherwise approved.
2. Perform vertical tracking on slopes to temporarily stabilize soil.
3. Provide equipment with a track undercarriage capable of producing linear soil impressions measuring a minimum of 12" in length by 2" to 4" in width by 1/2" to 2" in depth.
4. Do not exceed 12" between track impressions.
5. Install continuous linear track impressions where the minimum 12" length impressions are perpendicular to the slope or direction of water flow.

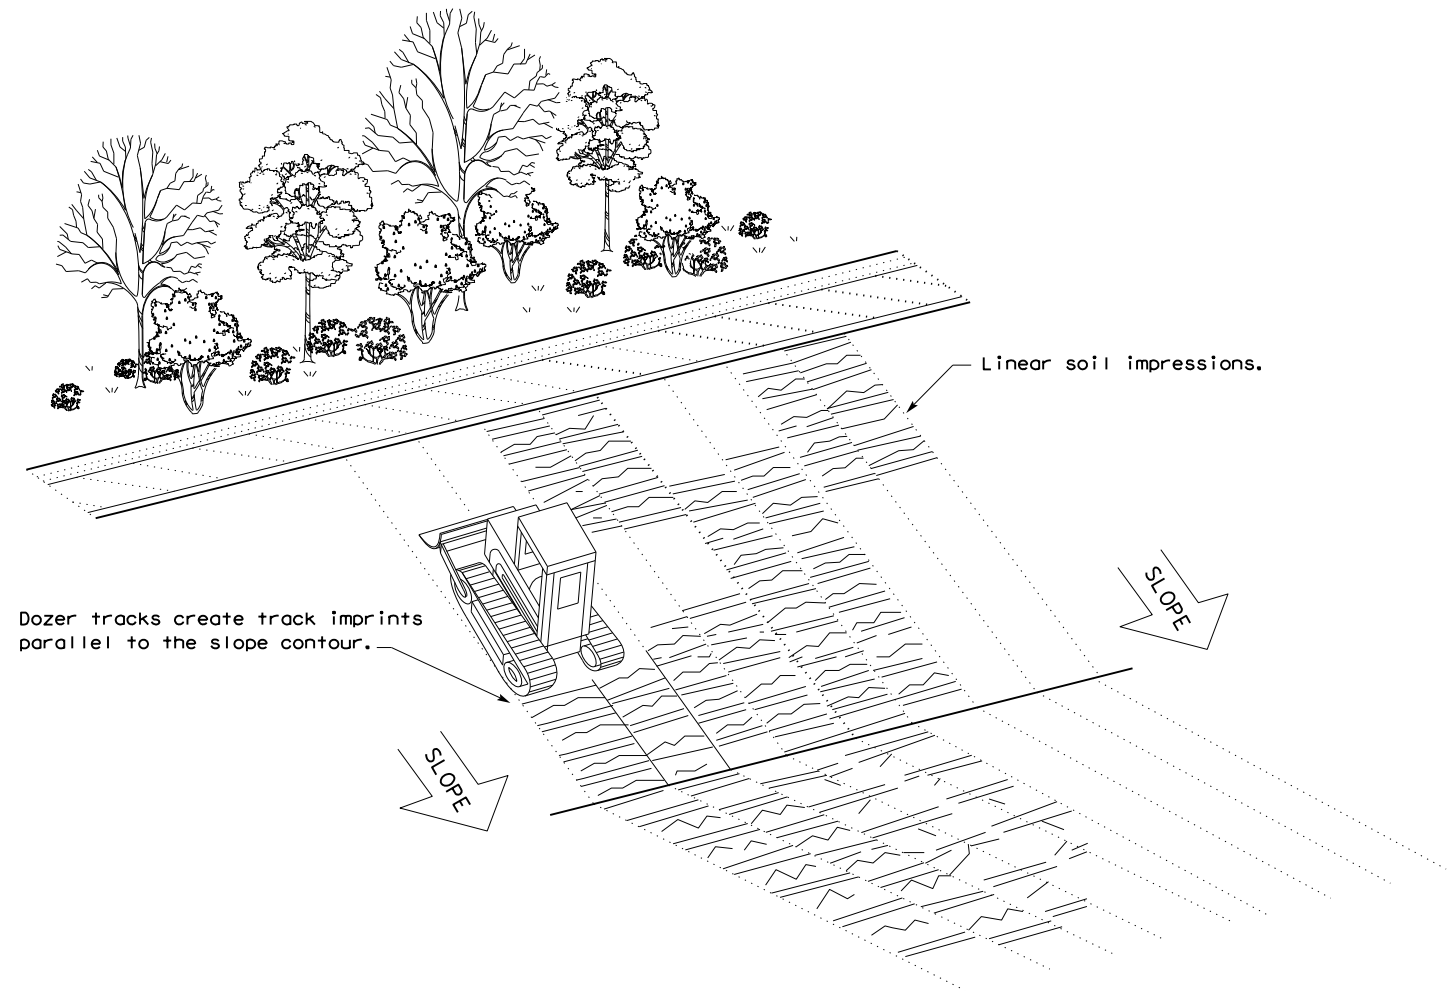


VERTICAL TRACKING

				Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES FENCE & VERTICAL TRACKING EC(1)-16					
FILE: ec116	DN: TxDOT	CK: KM	DW: VP	DN/CK: LS	
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY	
REVISIONS	0265	05	089, ETC	SH 71, ETC	
	DIST	COUNTY	SHEET NO.		
	AUS	BASTROP	71		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

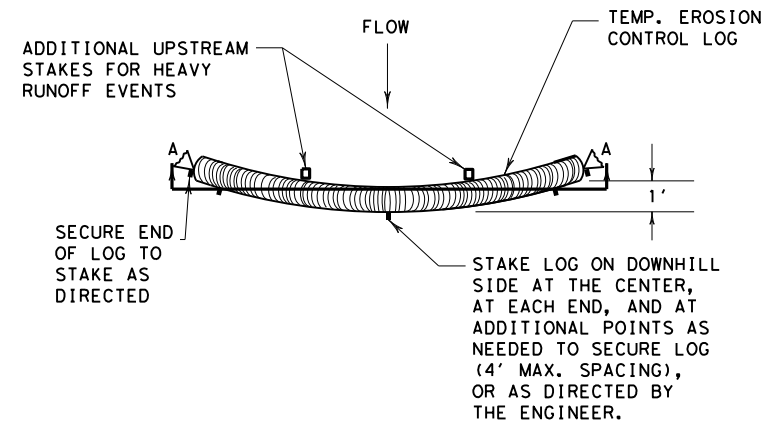


PLAN VIEW

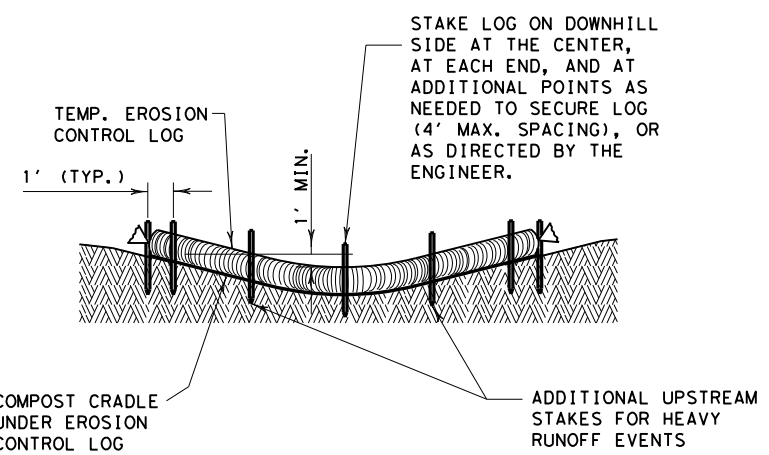


SECTION A-A
EROSION CONTROL LOG DAM

CL-D

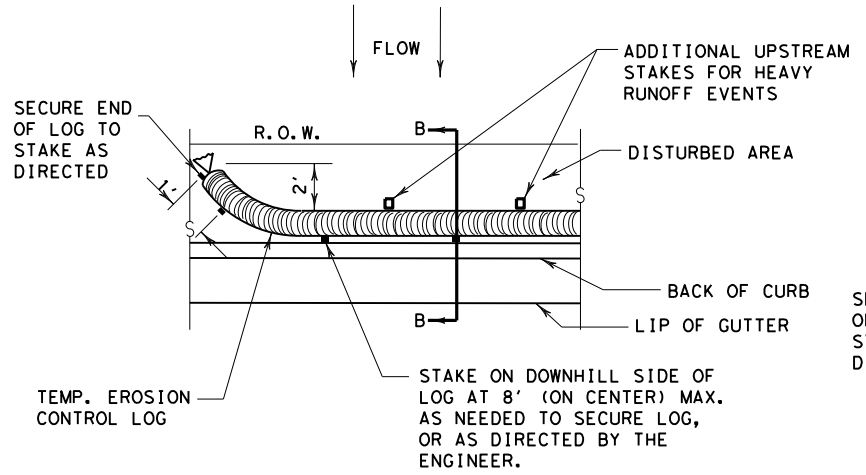


PLAN VIEW

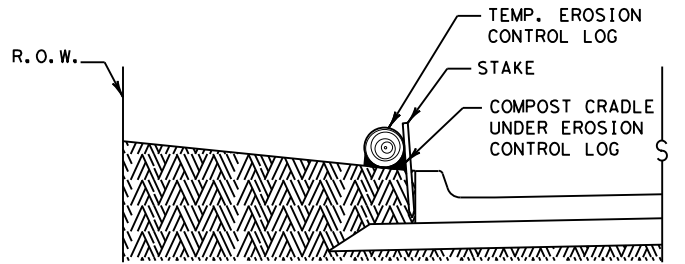


SECTION B-B
EROSION CONTROL LOG AT BACK OF CURB

CL-BOC

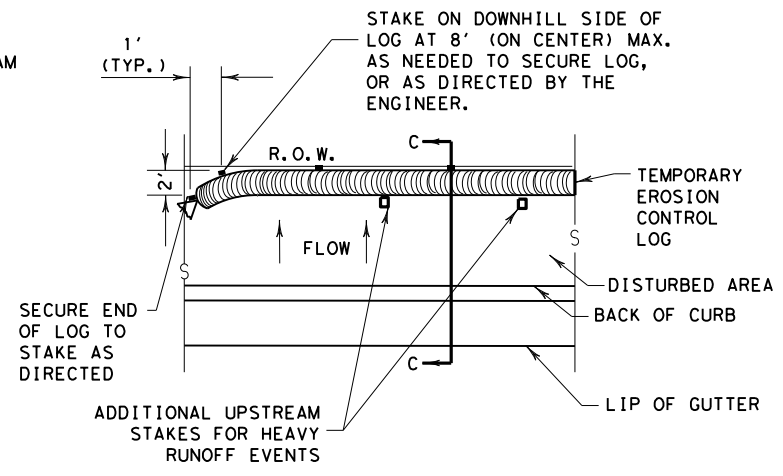


PLAN VIEW

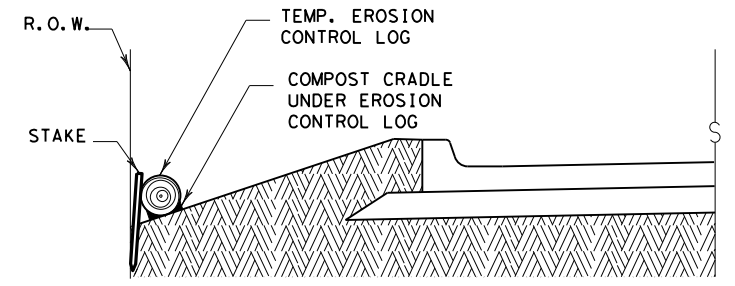

SECTION C-C


EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

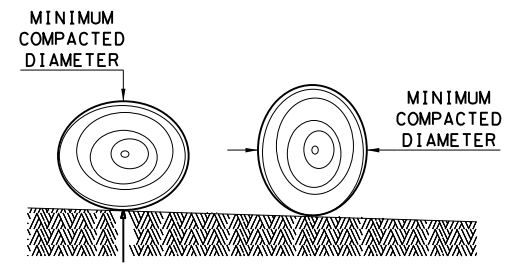

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

- LEGEND**
- CL-D EROSION CONTROL LOG DAM
 - CL-BOC EROSION CONTROL LOG AT BACK OF CURB
 - CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
 - CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
 - CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
 - CL-DI EROSION CONTROL LOG AT DROP INLET
 - CL-CI EROSION CONTROL LOG AT CURB INLET
 - CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET



REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

GENERAL NOTES:

1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.


SHEET 1 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES			
EROSION CONTROL LOG			
EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0265 05	089, ETC	SH 71, ETC
	DIST	COUNTY	SHEET NO.
	AUS	BASTROP	72

DATE: FILE:


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

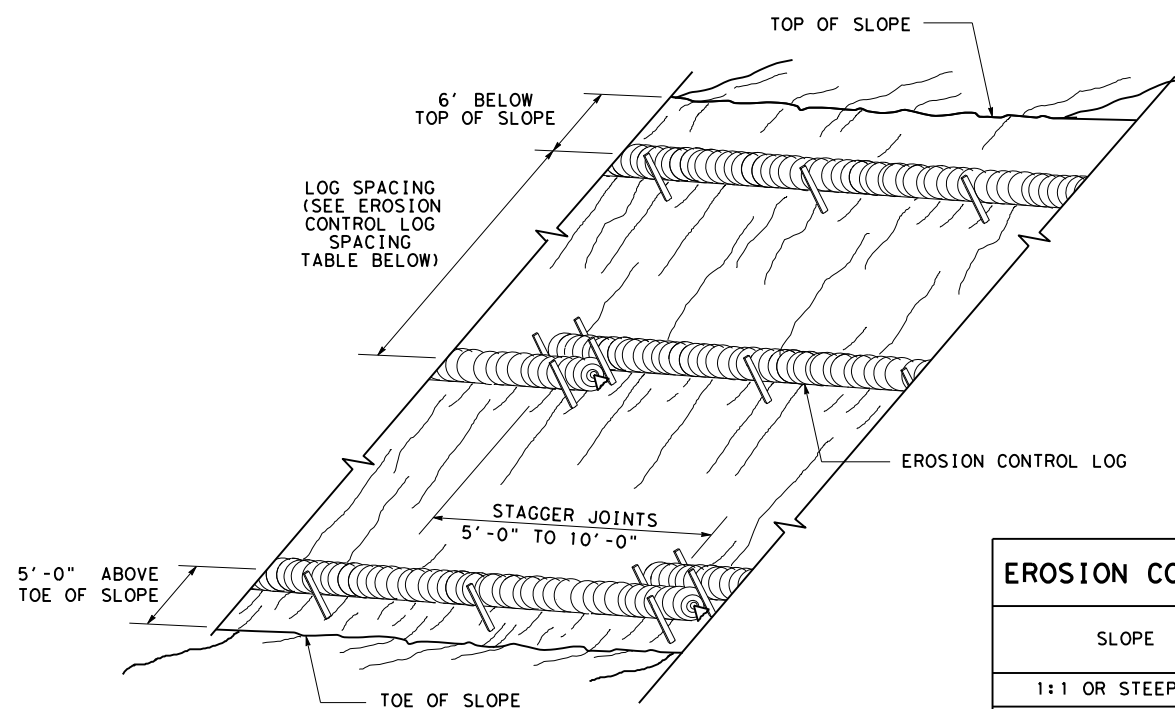


**EROSION CONTROL LOGS ON SLOPES
STAKE AND TRENCHING ANCHORING**

CL-SST

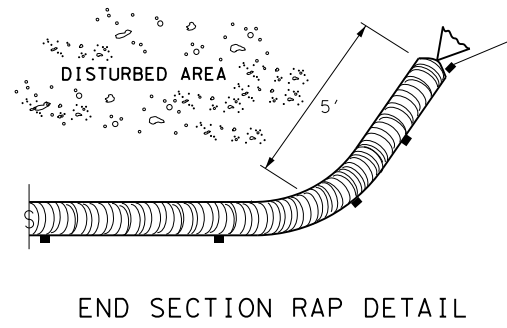


SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

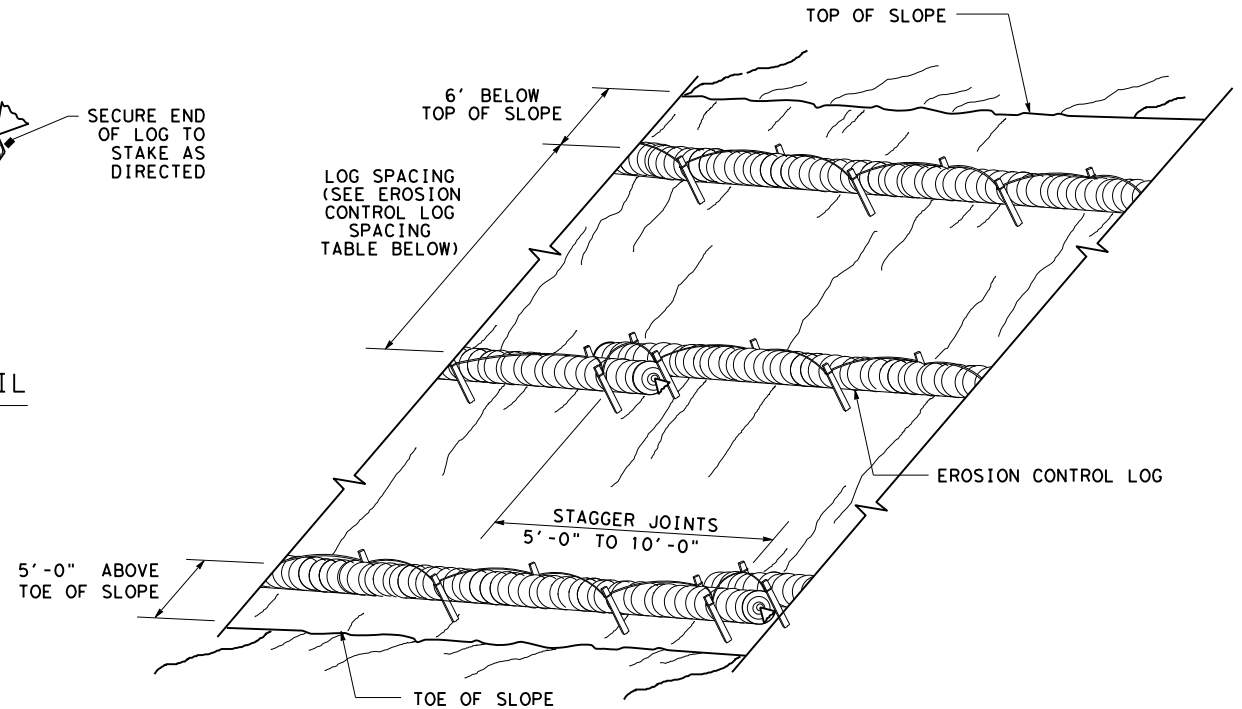



**EROSION CONTROL LOGS ON SLOPES
STAKE AND LASHING ANCHORING**

CL-SSL

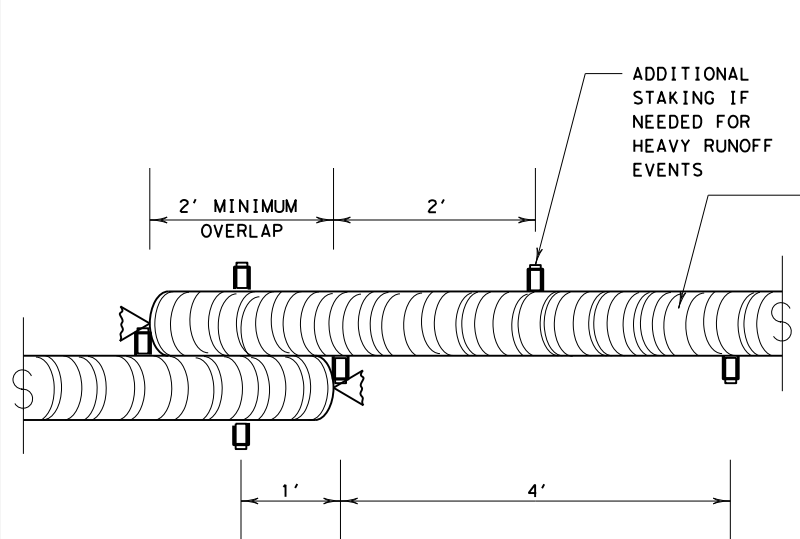


STAKE AND TRENCHING ANCHORING DETAIL

CL-SST

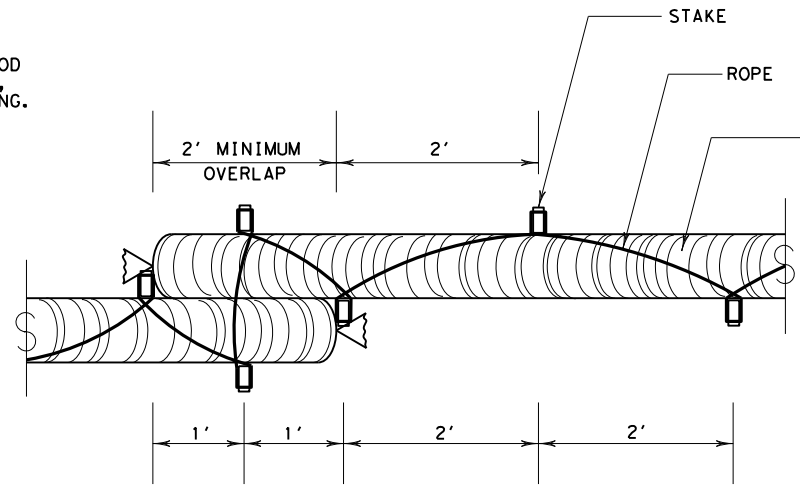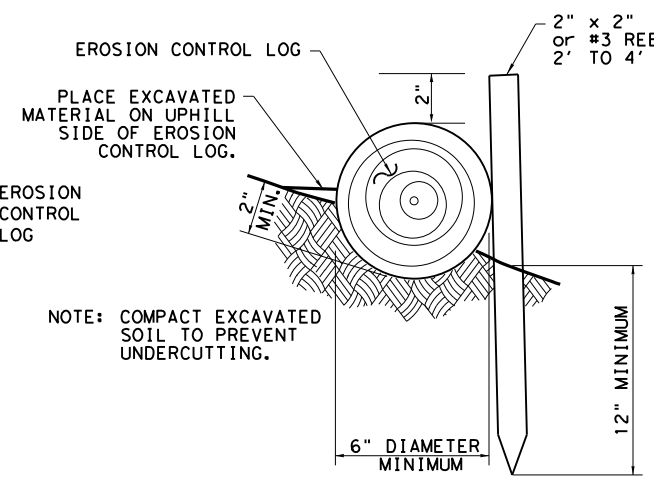


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

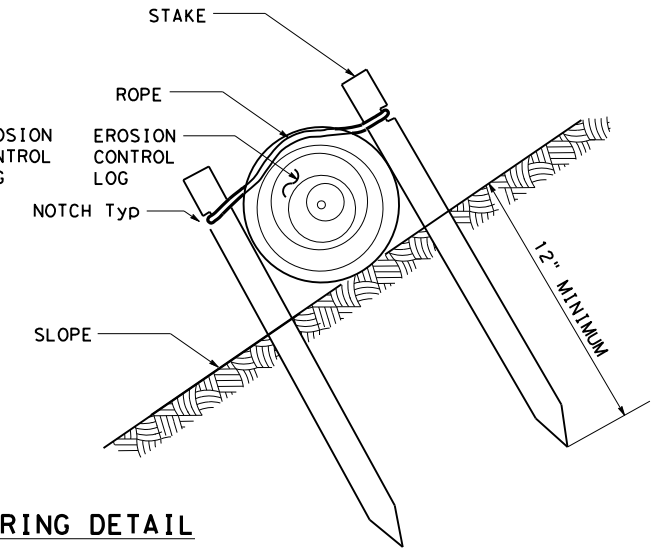

LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"




STAKE NOTCH DETAIL

SHEET 2 OF 3


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9) - 16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	0265 05	089, ETC	SH 71, ETC
DIST	COUNTY	SHEET NO.	
AUS	BASTROP	72A	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

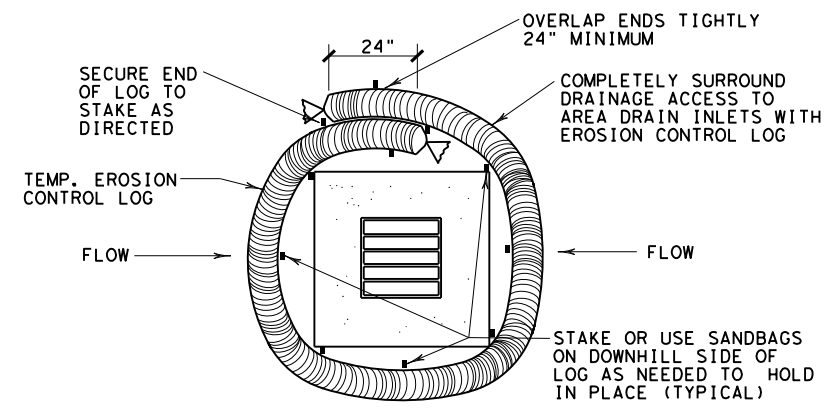


EROSION CONTROL LOG AT DROP INLET

CL-DI

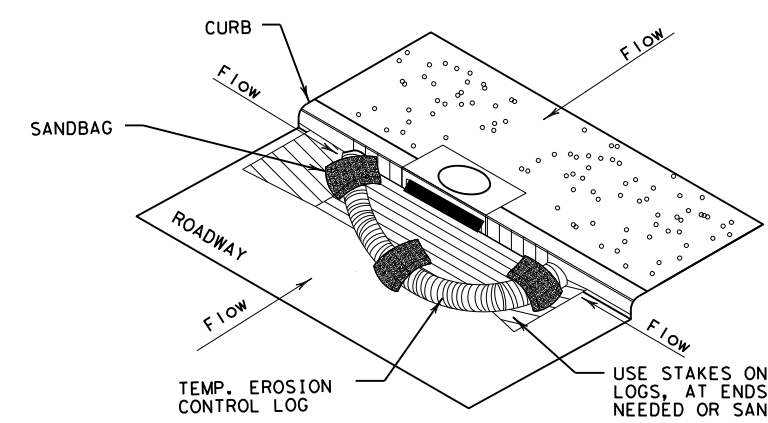

EROSION CONTROL LOG AT CURB INLET


CL-CI

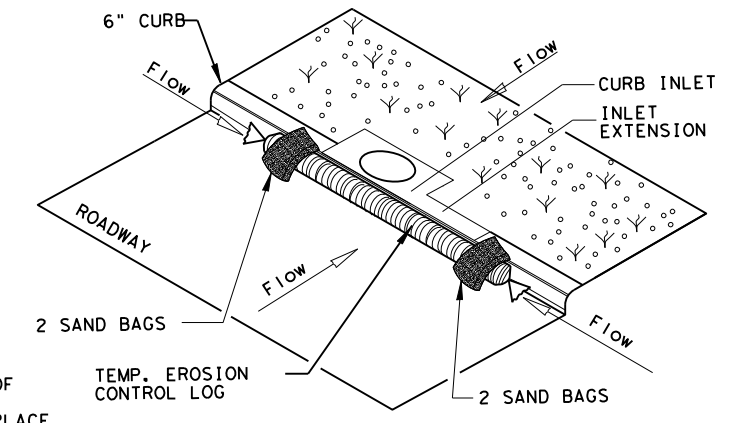

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

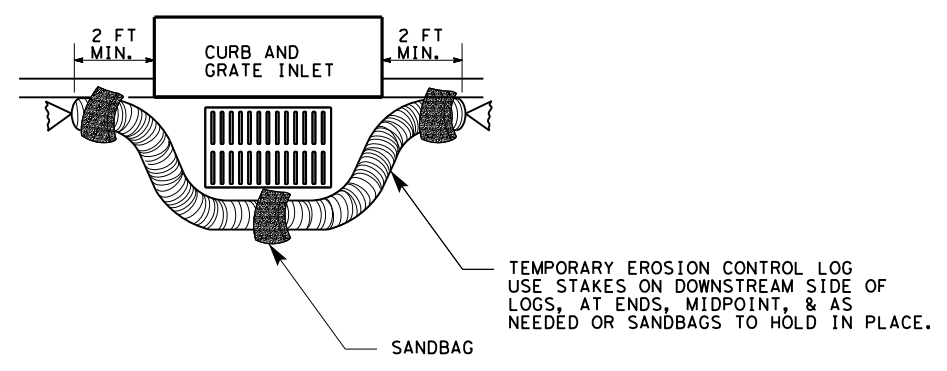

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

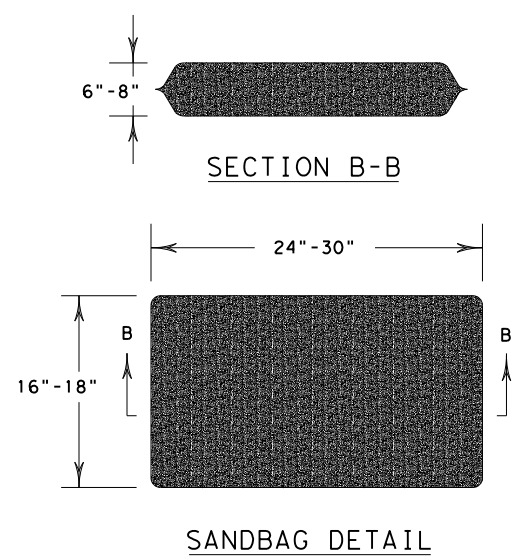


SHEET 3 OF 3

		<i>Design Division Standard</i>	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0265	05	089, ETC
DIST	COUNTY		SHEET NO.
AUS	BASTROP		72B

DATE:
FILE:



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

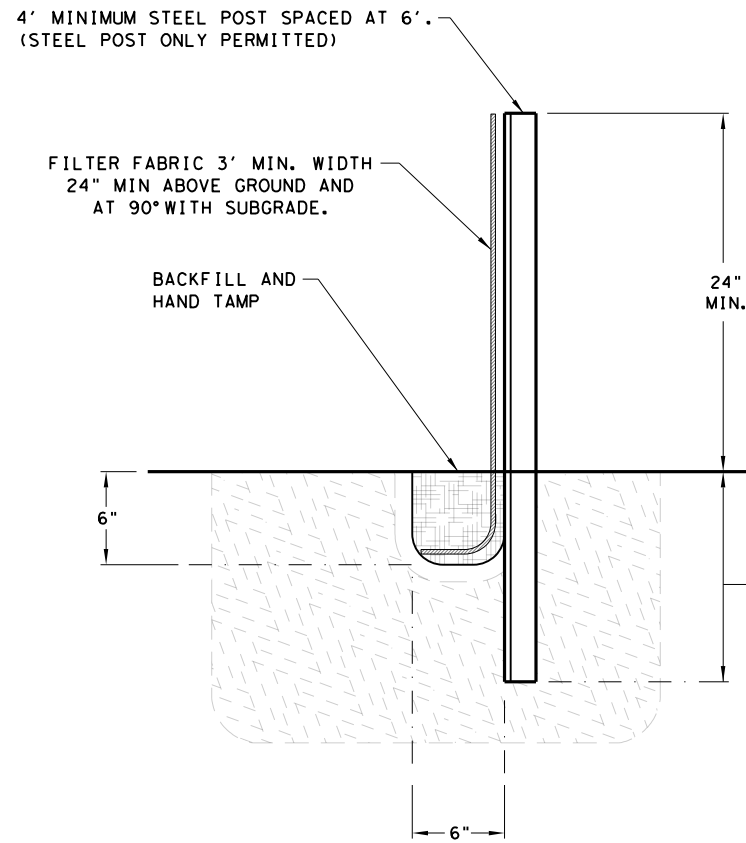


TRENCH SIDE VIEW DETAIL

FABRIC TOE-IN IS TO RUN DOWN THE TRENCH AND ALONG THE BOTTOM OF THE TRENCH

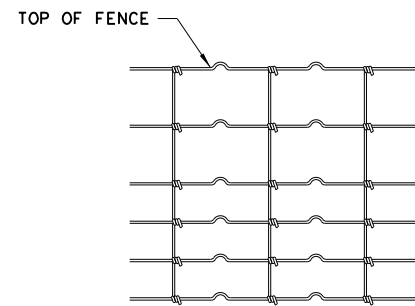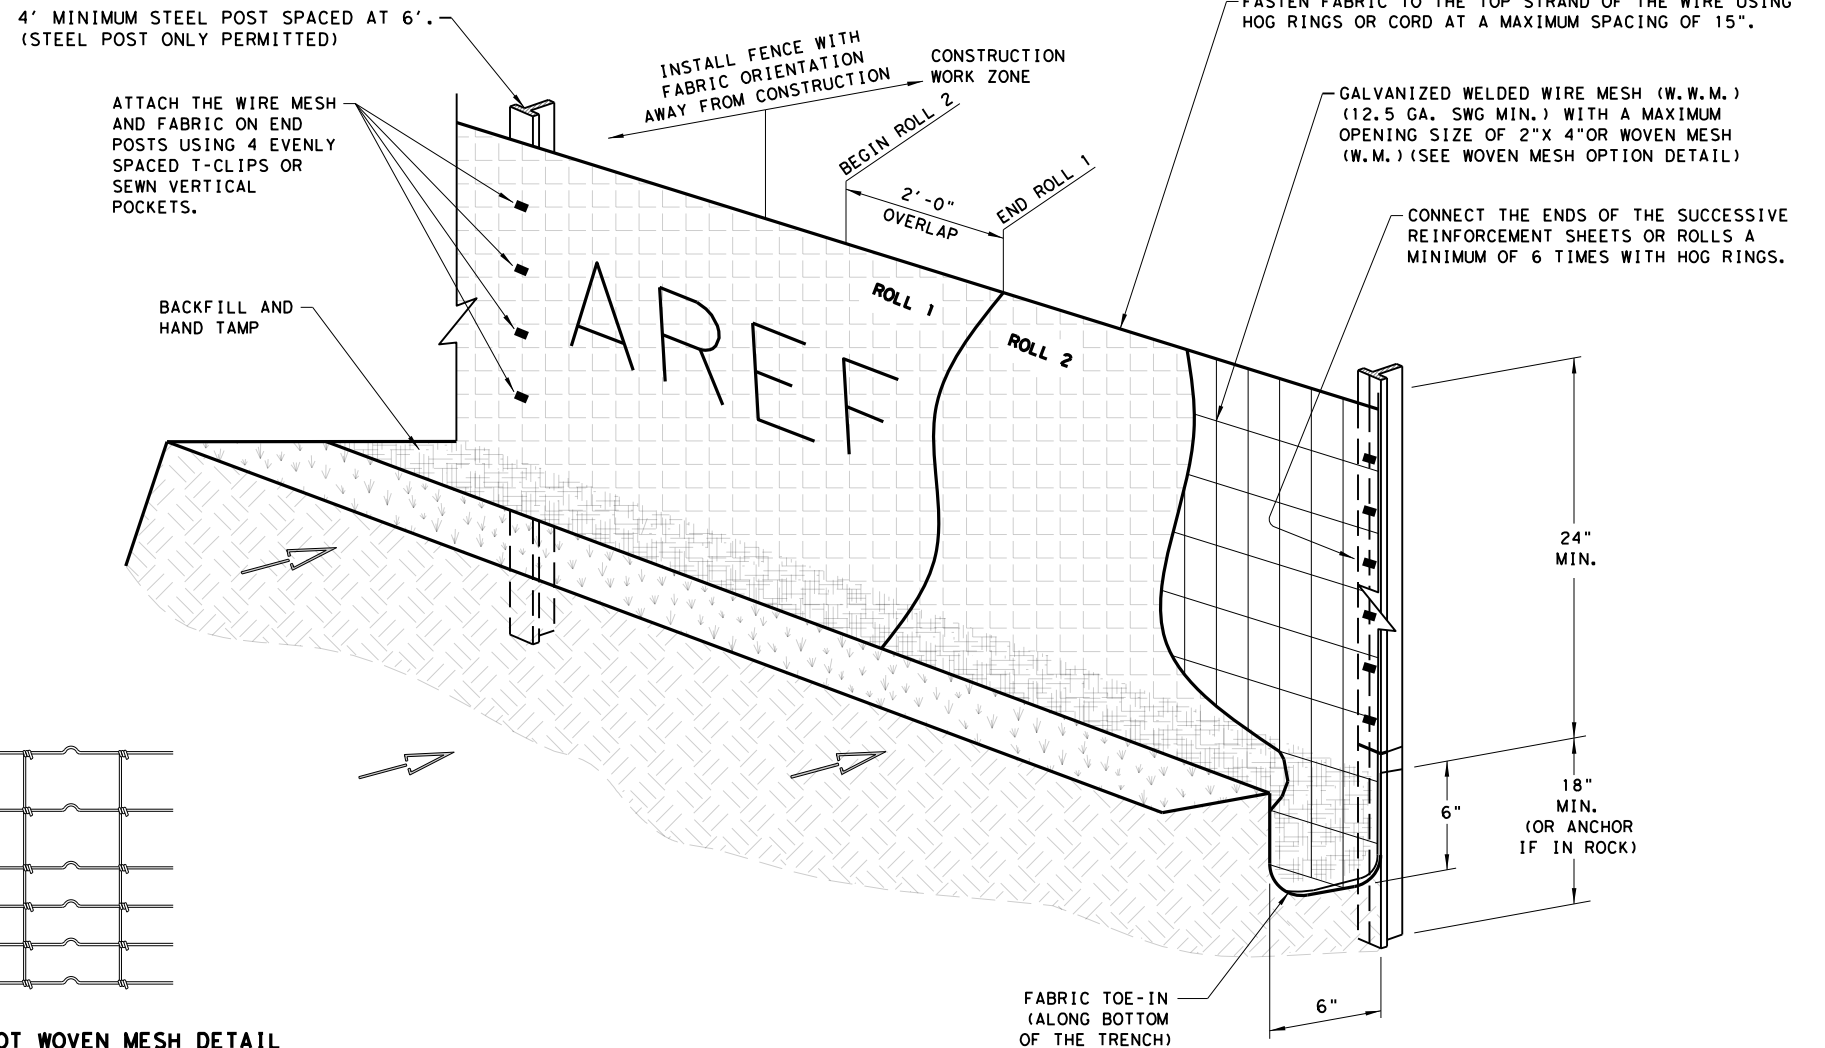

HINGE JOINT KNOT WOVEN MESH DETAIL

GALVANIZED HINGE JOINT KNOT WOVEN MESH (12.5 GA. SWG MIN.) REQUIRES A MINIMUM OF FIVE HORIZONTAL WIRES SPACED AT A MAXIMUM OF 12 INCHES APART AND ALL VERTICAL WIRES SPACED AT A MAXIMUM OF 12 INCHES APART.

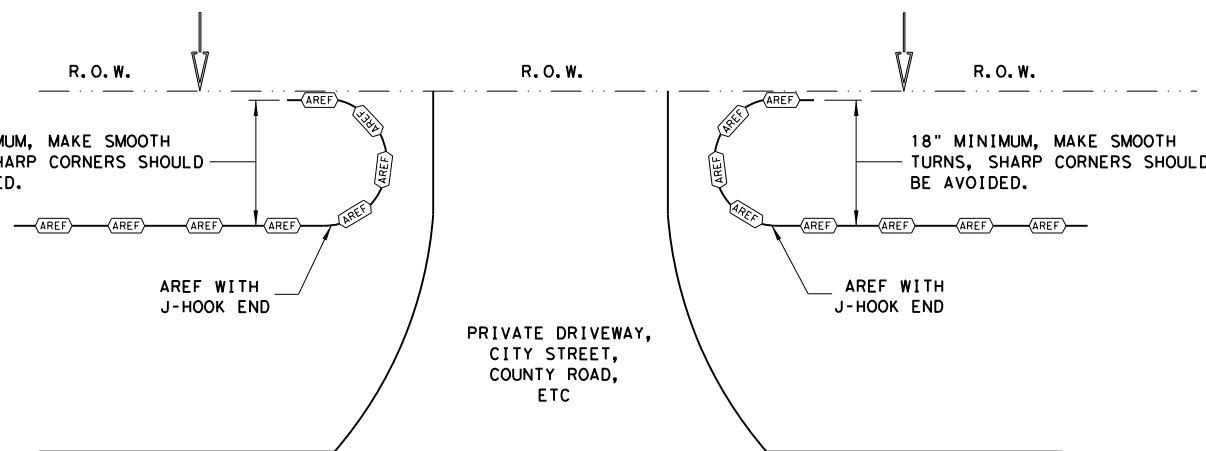

J-HOOK END OF FENCE DETAIL (TOP VIEW)

TRENCH IS TO STAY 6 IN DEEP AND 6 IN WIDE WITH FABRIC TOE-IN TO MATCH TRENCH DETAIL.

J-HOOK APPLIES AT DRIVEWAY BREAKS, ROADWAY BREAKS, AND AT ANY LOCATION AS DIRECTED BY THE ENGINEER.

GENERAL NOTES

1. REMOVE ALL ROOTS AND OTHER OBSTRUCTIONS FROM THE TRENCH BEFORE FABRIC PLACEMENT.
2. AMPHIBIAN AND REPTILE EXCLUSION FENCE MUST BE CHECKED DAILY, INCLUDING DAYS DURING RAINFALL SHUTDOWN PERIODS.
3. ANY DAMAGE TO FENCE, INCLUDING SMALL HOLES, MUST BE REPAIRED THE DAY IT IS OBSERVED BEFORE DARK.
4. SMALL HOLES (WITH THE ENGINEER'S DISCRETION) MAY BE REPAIRED WITH TAPE AS DIRECTED BY THE ENGINEER.
5. AS DIRECTED BY THE ENGINEER, SECTIONS OF FENCE WHERE THE DAMAGE IS DEEMED DETRIMENTAL TO THE FENCE WILL BE REPLACED RATHER THAN REPAIRED.
6. A MINIMUM OF 2' SHOULD BE OVERLAPPED WHEN JOINING FABRIC SECTIONS.
7. PAINT "AREF" OR "TEF" ON THE FABRIC IN BRIGHT COLOR EVERY 50' AND AT BREAKS.
8. REMOVE SEDIMENT, VEGETATION, OR OTHER DEBRIS TO MAINTAIN THE 24" AREF CLEARANCE.
9. FOR PAYMENT AND ADDITIONAL INFORMATION FOR AREF, SEE SPEC. 5116 (AMPHIBIAN AND REPTILE EXCLUSION FENCE).

LEGEND

- AREF — AMPHIBIAN AND REPTILE EXCLUSION FENCE
- AMPHIBIAN AND REPTILE DIRECTION OF TRAVEL

		<i>Design Division Standard</i>	
AMPHIBIAN AND REPTILE EXCLUSION FENCE			
AREF - 21			
FILE: aref21.dgn	DN: TJ	CK: KM	DW: SS
© TxDOT: FEBRUARY 2021	CONT	SECT	JOB
REVISIONS	0265	05	089, ETC
DIST	COUNTY		SHEET NO.
AUS	BASTROP		73