

STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT

FEDERAL AID PROJECT NO. BR 2024(528), etc.

SH 70 & 86
HALL COUNTY

FOR THE CONSTRUCTION OF ASPHALTIC CONCRETE PAVEMENT OVERLAY
CONSISTING OF ACP OVERLAY AND BRIDGE
REPLACEMENT (CULVERT)

FEDERAL AID PROJECT NO.			
BR 2024(528), etc			
CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY		SHEET NO.
CHS	HALL		1

DESIGN SPEED - 50 MPH
ADT.(2022) - 596
ADT.(2042) - 834

THE TCP HAS BEEN REVIEWED BY
TRAFFIC SAFETY COMMITTEE

Joel R. Stone, P.E. 08/03/2023
TRAFFIC SAFETY CHAIRMAN

REQUIRED SIGNS SHALL BE IN ACCORDANCE WITH
BC (1)-21 THRU BC (12)-21 AND THE 'TEXAS
MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES'.

CSJ: 0105-02-023


LIMITS: INTERSECTION OF SH 70, NORTH
TO: FM 657

NET LENGTH OF ROADWAY - 43,695.08 FT. - 8.276 MI.
NET LENGTH OF BRIDGE - 23.32 FT. - 0.004 MI.
NET LENGTH OF PROJECT - 43,718.40 FT. - 8.280 MI.

CSJ: 0105-02-026

LIMITS: TURKEY NCL, NORTH
TO: INTERSECTION OF SH 86

NET LENGTH OF ROADWAY - 2,059.20 FT. - 0.390 MI.
NET LENGTH OF BRIDGE - 0.00 FT. - 0.000 MI.
NET LENGTH OF PROJECT - 2,059.20 FT. - 0.390 MI.

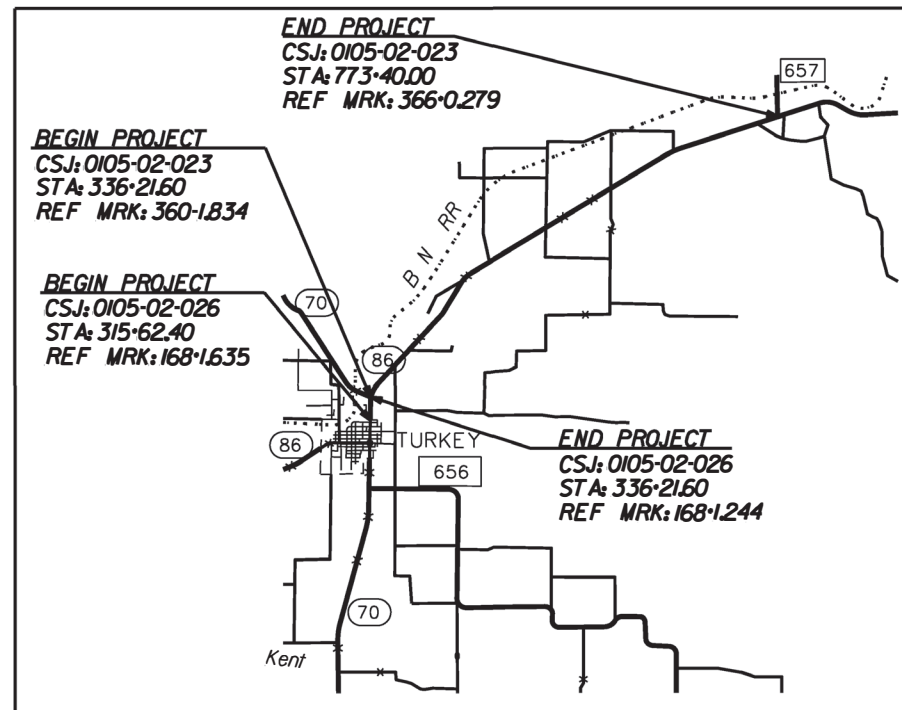

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSINGS: NONE

FINAL PLANS

CONTRACTOR NAME: _____

CONTRACTOR ADDRESS: _____

LETTING DATE: _____

DATE TIME CHARGES BEGAN: _____

DATE WORK BEGAN: _____

DATE WORK COMPLETED: _____

DATE OF WORK ACCEPTANCE: _____

I, _____, P.E. DO HEREBY CERTIFY
THAT THE CONSTRUCTION WORK WAS PERFORMED IN ACCORDANCE WITH
THE PLANS, CONTRACT, AND CHANGES THERETO.

AREA ENGINEER

DATE



All Rights Reserved

RECOMMENDED FOR LETTING: 08/02/2023

Matthew G. Heubrich, P.E.

AREA ENGINEER

SUBMITTED FOR LETTING: 08/03/2023

Chad B. Steel, P.E.

TP&D DIRECTOR

RECOMMENDED FOR LETTING: 08/03/2023

[Signature]

DISTRICT ENGINEER

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION,
NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS,
SHALL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS FOR ALL
FEDERAL-AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, JULY 2022)

DATE: 8/2/2023 12:33:16 PM
 FILE: T:\CHSD\PROJECTS\HALL\05-02-023 (SH 86 Rehab)\Plan Sheets\General\002 INDEX OF SHEETS.dgn

GENERAL
 1 TITLE SHEET
 2 INDEX OF SHEETS
 3 TYPICAL SECTIONS
 4-7 GENERAL NOTES
 8-9 ESTIMATE & QUANTITY
 10-11 QUANTITY SUMMARY

TRAFFIC CONTROL PLAN
 12 TRAFFIC CONTROL PLAN AND SEQUENCE OF WORK

TRAFFIC CONTROL PLAN STANDARDS
 * 13-24 BC (1)-21 THRU BC (12)-21
 * 25 TCP (1-1)-18
 * 26 TCP (1-2)-18
 * 27 TCP (2-1)-18
 * 28 TCP (2-2)-18
 * 29 TCP (2-8)-23
 * 30 TCP (3-1)-13
 * 31 TCP (3-3)-14
 * 32 WZ (STPM)-23
 * 33 WZ (UL)-13
 * 34 WZ (RS)-22

ROADWAY DETAILS - SH 86 @ DRAW
 35 SURVEY CONTROL INDEX AND ALIGNMENT DATA
 36 PLAN AND PROFILE
 37 INTERSECTION LAYOUT
 38 PLANING DETAIL

ROADWAY DETAILS STANDARDS
 * 39-45 D & OM (1)-20 THRU (6)-20 & (VIA)-20
 * 46-47 SSCB(2)-10
 * 48 SLED-19
 * 48 A ABSORB(M)-19
 * 49-51 PM (1)-22, (2)-22 & (3)-22
 * 52-53, 53A RS (2)-23, (4)-23 & (5)-23

BRIDGE - SH 86 @ DRAW
 54-55 HYDRAULIC DATA
 56 CULVERT LAYOUT

STRUCTURE STANDARDS
 * 57 BCS
 * 58 NBIS
 * 59-60 SRR
 * 61-62 MC-7-10
 * 63 MC-MD
 * 64-66 SETB-FW-0

ENVIRONMENTAL ISSUES
 67 ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS (EPIC)
 68-68A STORMWATER POLLUTION PREVENTION PLAN (SW3P)

ENVIRONMENTAL ISSUES STANDARDS
 * 69-71 EC (9)-16
 72 SWP3 LAYOUT

*THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ON THIS SHEET HAVE BEEN ISSUED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

Charles B. Steed, P.E. 08/03/2023

 DESIGN ENGINEER DATE



Charles B. Steed, P.E.

08/03/2023

INDEX OF SHEETS





CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY		SHEET NO.
CHS	HALL		2

DATE: 8/1/2023 1:04:47 PM
 FILE: I:\CHSD\DESIGN\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\General\Typical Sections.dgn

ROADWAY CORE INFORMATION

STATION	LANE	HMAC DEPTH	FLEX BASE
336+25	WBL	3.75"	12"
349+71	EBL	2.50"	13.25"
376+81	EBL	1.75"	16"
390+48.50	WBL	1.75"	19"
403+67	EBL	2"	11"
417+22.50	WBL	1.75"	17"
430+72	EBL	2.25"	17"
444+18	WBL	2.75"	27"
457+56.50	EBL	2.50"	16"
470+94.50	WBL	1.75"	18.25"
484+50	EBL	2"	20"
498+14.50	WBL	2.25"	21.75"
511+35	EBL	2.25"	28"
525+02.50	WBL	2.25"	20.25"
538+03	EBL	1.75"	19.5"
551+01.50	WBL	2"	22.75"
564+60.50	EBL	2.75"	21"
577+95.50	WBL	2"	29"
591+57.50	EBL	2.75"	19"
604+86	WBL	2.25"	26.75"
618+41.50	EBL	2.75"	19.25"
631+98	WBL	2.5"	29"
645+85.50	EBL	1.75"	25.75"
659+67	WBL	2.75"	26.25"
672+95	EBL	1.25"	20.75"
686+74	WBL	2"	19.25"
700+25.50	EBL	2"	24.75"
713+85.50	WBL	1.75"	31.5"
727+00.50	EBL	1.75"	31.75"
740+41	WBL	1.5"	49.5"
754+32	EBL	2"	31.5"
764+82	WBL	1.75"	28.25"
771+97	EBL	2"	28.75"

* FOR CONTRACTOR INFORMATION ONLY.

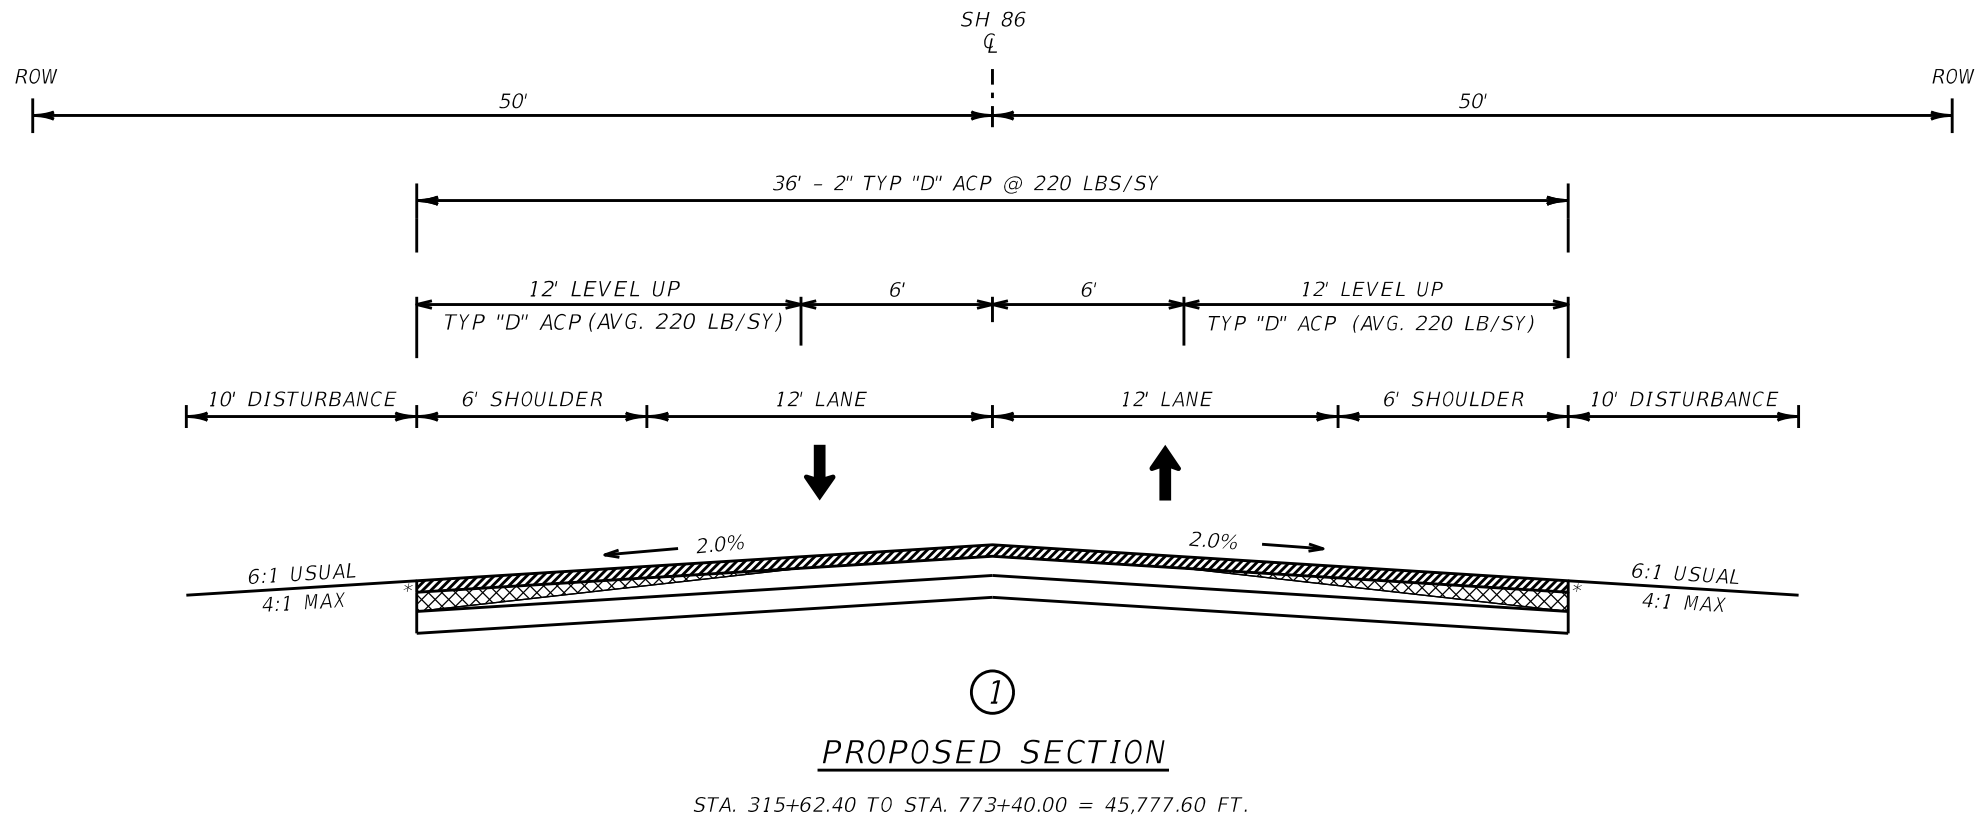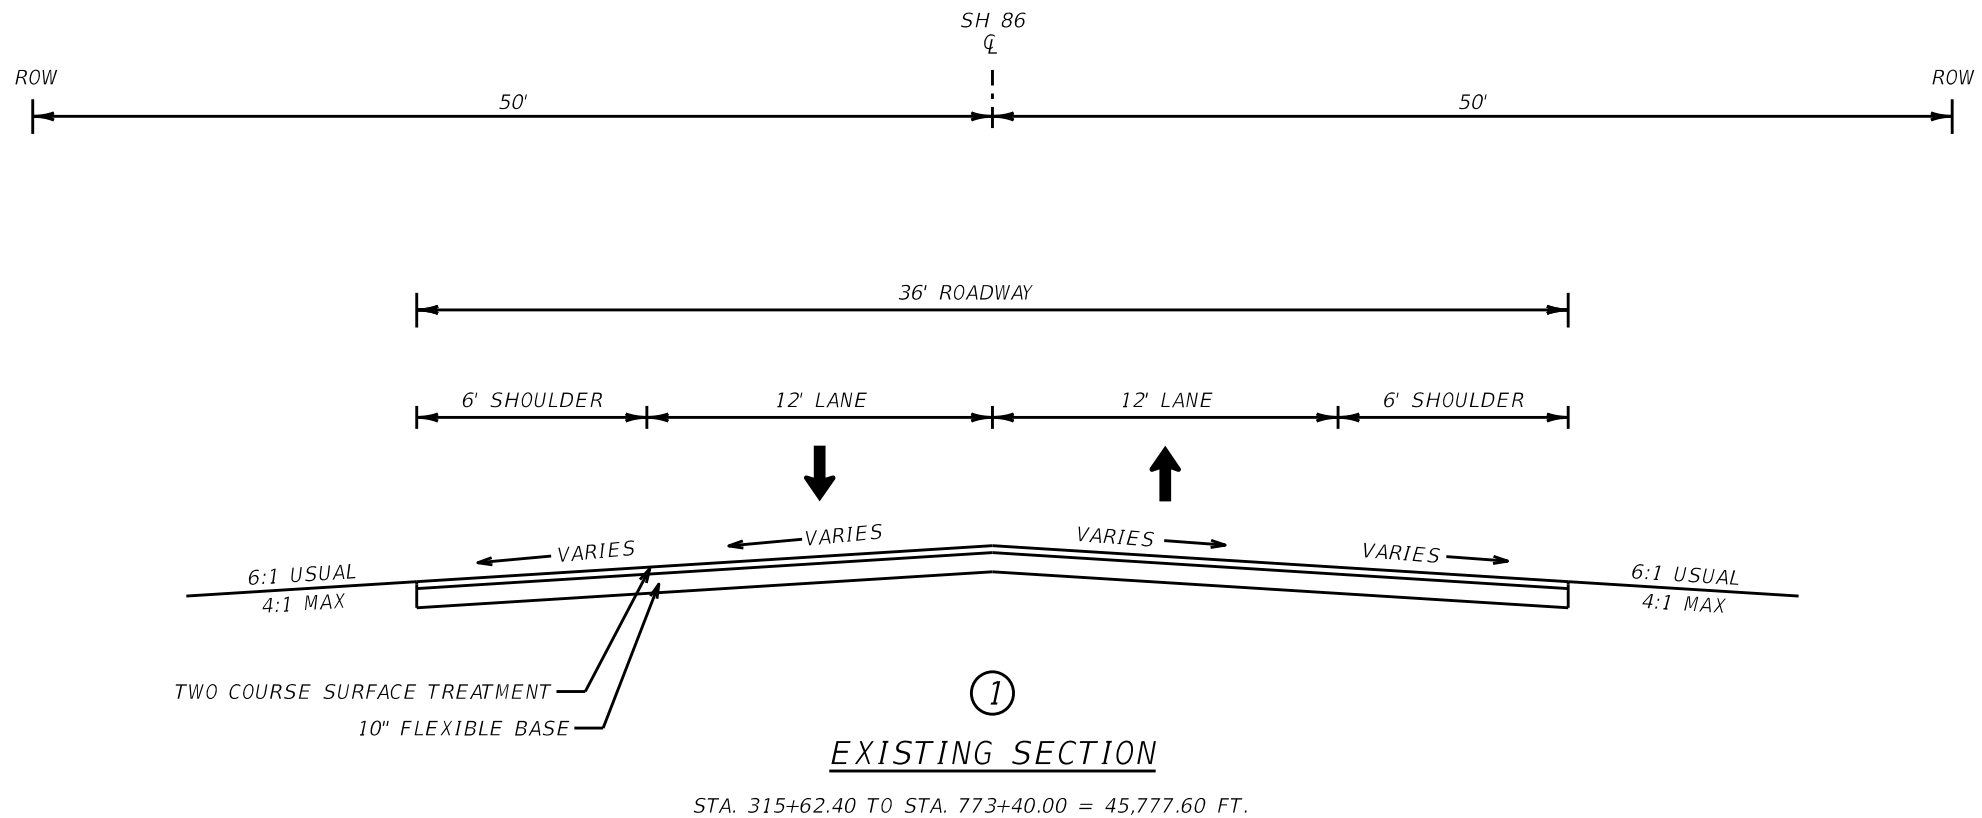

* BACKFILL PAVEMENT EDGES TYPE A OR B




Charles B. Steed, P.E.

08/03/2023

SH 70/86
 TYPICAL
 SECTIONS

NOT TO SCALE

SHEET 1 OF 1



CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY		SHEET NO.
CHS	HALL		3

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

GENERAL NOTES AND SUPPLEMENTAL INFORMATION

*BASIS FOR ESTIMATE		
ITEM	DESCRIPTION	RATE
168	VEGETATIVE WATERING	39,000 GAL/ACRE
314	EMULSIFIED ASPH (CSS-1H) (EROSION CONTROL)	0.20 GAL/SY
3076	D-GR HMA (PER BID ITEM DESCRIPTION)	110 LB/SY/IN
3076	TACK COAT (TRAIL)	0.10 GAL/SY

*RATES SHOWN IN THIS TABLE HAVE BEEN USED FOR PLAN QUANTITY CALCULATIONS AND MAY BE ADJUSTED BY THE ENGINEER DURING CONSTRUCTION FOR APPLICATION PURPOSES.

CONTRACTOR QUESTIONS ON THIS PROJECT ARE TO BE ADDRESSED TO THE FOLLOWING INDIVIDUAL(S):

MATTHEW.HERBSTTRITT@TXDOT.GOV

QUESTIONS MAY BE SUBMITTED VIA THE LETTING PRE-BID Q&A WEB PAGE. THIS WEBPAGE CAN BE ACCESSED FROM THE NOTICE TO CONTRACTORS DASHBOARD LOCATED AT THE FOLLOWING ADDRESS:

[HTTPS://TABLEAU.TXDOT.GOV/VIEWS/PROJECTINFORMATIONDASHBOARD/NOTICETOCONTRACTORS](https://tableau.txdot.gov/views/projectinformationdashboard/noticetocontractors)

ALL CONTRACTOR QUESTIONS WILL BE REVIEWED BY THE ENGINEER. ALL QUESTIONS AND ANY CORRESPONDING RESPONSES THAT ARE GENERATED WILL BE POSTED THROUGH THE SAME LETTING PRE-BID Q&A WEB PAGE.

THE LETTING PRE-BID Q&A WEB PAGE FOR EACH PROJECT CAN BE ACCESSED BY USING THE DASHBOARD TO NAVIGATE TO THE PROJECT YOU ARE INTERESTED IN BY SCROLLING OR FILTERING THE DASHBOARD USING THE CONTROLS ON THE LEFT. HOVER OVER THE BLUE HYPERLINK FOR THE PROJECT YOU WANT TO VIEW THE Q&A FOR AND CLICK ON THE LINK IN THE WINDOW THAT POPS UP.

ITEM 5 - CONTROL OF THE WORK

CONSTRUCTION SURVEYING ON THIS CONTRACT WILL BE IN ACCORDANCE WITH ARTICLE 5.9.3, "METHOD C". THE CONTRACTOR SHALL PLACE CONSTRUCTION STAKES NEAR THE RIGHT-OF-WAY LINE AT INTERVALS OF NO MORE THAN 200', OR AS DIRECTED, WITH STATIONING.

CORRECT ANY DEFICIENCIES IDENTIFIED DURING FINAL INSPECTION, INCLUDING REQUIRED PAPERWORK. SUBMIT ALL REQUIRED DOCUMENTATION WITHIN 14 DAYS OF FINAL ACCEPTANCE AS DIRECTED BY THE ENGINEER.

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

ITEM 6 – CONTROL OF MATERIALS

WHEN A PRECAST OR CAST-IN-PLACE CONCRETE ELEMENT IS INCLUDED IN THE PLANS, A PRECAST CONCRETE ALTERNATE MAY BE SUBMITTED IN ACCORDANCE WITH "STANDARD OPERATING PROCEDURE FOR ALTERNATE PRECAST PROPOSAL SUBMISSION" FOUND ONLINE AT THE FOLLOWING ADDRESS:

[HTTPS://FTP.TXDOT.GOV/PUB/TXDOT-INFO/BRG/DESIGN/ALTERNATE-PRECAST-PROPOSAL-SUBMISSION.PDF](https://ftp.txdot.gov/pub/txdot-info/brg/design/alternate-precast-proposal-submission.pdf)

AN ACCEPTANCE OR DENIAL OF AN ALTERNATE IS AT THE SOLE DISCRETION OF THE ENGINEER. IMPACTS TO THE PROJECT SCHEDULE AND ANY ADDITIONAL COSTS RESULTING FROM THE USE OF ALTERNATES ARE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.

TO COMPLY WITH THE LATEST PROVISIONS OF BUILD AMERICA, BUY AMERICA ACT (BABA ACT) OF THE BIPARTISAN INFRASTRUCTURE LAW, THE CONTRACTOR MUST SUBMIT A NOTARIZED ORIGINAL OF THE TXDOT CONSTRUCTION MATERIAL BUY AMERICA CERTIFICATION FORM FOR ALL ITEMS CLASSIFIED AS CONSTRUCTION MATERIALS. THIS FORM IS NOT REQUIRED FOR MATERIALS CLASSIFIED AS A MANUFACTURED PRODUCT.

REFER TO THE BUY AMERICA MATERIAL CLASSIFICATION SHEET FOR CLARIFICATION ON MATERIAL CATEGORIZATION.

THE BUY AMERICA MATERIAL CLASSIFICATION SHEET IS LOCATED AT THE BELOW LINK.

[HTTPS://WWW.TXDOT.GOV/BUSINESS/RESOURCES/MATERIALS/BUY-AMERICA-MATERIAL-CLASSIFICATION-SHEET.HTML](https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html) FOR CLARIFICATION ON MATERIAL CATEGORIZATION.

ITEM 7 - LEGAL RELATIONS AND RESPONSIBILITIES

PROVIDE INGRESS & EGRESS TO THE ADJACENT PROPERTIES IN AREAS UNDER CONSTRUCTION. PHASED CONSTRUCTION OF DRIVEWAYS AND STREETS SHALL BE REQUIRED TO PROVIDE UNINTERRUPTED ACCESS TO ADJACENT PROPERTIES. COORDINATE WORK WITH THE PROPERTY OWNERS BEFORE BEGINNING ANY CONSTRUCTION IN THE VICINITY OF THE DRIVE.

DO NOT INITIATE ACTIVITIES IN A PROJECT SPECIFIC LOCATION (PSL) ASSOCIATED WITH A U.S. ARMY CORPS OF ENGINEERS (USACE) PERMIT AREA THAT HAS NOT BEEN PREVIOUSLY EVALUATED BY THE USACE AS PART OF THE PERMIT REVIEW FOR THIS PROJECT. SUCH ACTIVITIES INCLUDE BUT ARE NOT LIMITED TO, HAUL ROADS, EQUIPMENT STAGING AREAS, BORROW AND DISPOSAL SITES. "ASSOCIATED", AS DEFINED HEREIN, INCLUDES MATERIALS DELIVERED TO OR FROM THE PSL. THE PERMIT AREA INCLUDES ALL WATERS OF THE U.S. OR ASSOCIATED WETLANDS AFFECTED BY PROJECT ACTIVITIES. SPECIAL RESTRICTIONS MAY BE REQUIRED FOR SUCH WORK. CONSULT WITH THE USACE REGARDING ACTIVITIES, INCLUDING PROJECT SPECIFIC LOCATIONS (PSLS) THAT HAVE NOT BEEN PREVIOUSLY EVALUATED BY THE USACE. PROVIDE THE DEPARTMENT WITH A COPY OF ALL CONSULTATION(S) OR APPROVAL(S) FROM THE USACE PRIOR TO INITIATING ACTIVITIES.

PROCEED WITH ACTIVITIES IN PSLS THAT DO NOT AFFECT A USACE PERMIT AREA IF A SELF DETERMINATION HAS BEEN MADE THAT THE PSL IS NON-JURISDICTIONAL OR PROPER USACE CLEARANCES HAVE BEEN OBTAINED IN JURISDICTIONAL AREAS OR HAVE BEEN PREVIOUSLY EVALUATED BY THE USACE AS PART OF THE PERMIT REVIEW FOR THIS PROJECT. DOCUMENT ANY DETERMINATION(S) THAT PROJECT ACTIVITIES DO NOT AFFECT A USACE PERMIT AREA.

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

MAINTAIN COPIES OF DETERMINATION(S) FOR REVIEW BY THE DEPARTMENT OR ANY REGULATORY AGENCY.

DOCUMENT AND COORDINATE WITH THE USACE, IF REQUIRED, PRIOR TO ANY EXCAVATION HAULED FROM OR EMBANKMENT HAULED INTO A USACE PERMIT AREA BY EITHER (1) OR (2) BELOW.

1. RESTRICTED USE OF MATERIALS FOR THE PREVIOUSLY EVALUATED PERMIT AREAS.

DOCUMENT BOTH THE PROJECT SPECIFIC LOCATION (PSL) AND AUTHORIZATION. MAINTAIN COPIES FOR REVIEW BY THE DEPARTMENT OR ANY REGULATORY AGENCY. WHEN AN AREA WITHIN THE PROJECT LIMITS HAS BEEN EVALUATED BY THE USACE AS PART OF THE PERMIT PROCESS FOR THIS PROJECT:

- SUITABLE EXCAVATION OF REQUIRED MATERIAL IN THE AREAS SHOWN ON THE PLANS AND CROSS SECTIONS AS SPECIFIED IN ITEM 110 IS USED FOR PERMANENT OR TEMPORARY FILL (ITEM 132, EMBANKMENT) WITHIN A USACE PERMIT AREA;
- SUITABLE EMBANKMENT (ITEM 132) FROM WITHIN THE USACE PERMIT AREA IS USED AS FILL WITHIN A USACE EVALUATED AREA; AND,
- UNSUITABLE EXCAVATION OR EXCESS EXCAVATION [“WASTE”] (ITEM 110) THAT IS DISPOSED OF AT A LOCATION APPROVED BY THE ENGINEER WITHIN A USACE EVALUATED AREA.

2. CONTRACTOR MATERIALS FROM AREAS OTHER THAN PREVIOUSLY EVALUATED AREAS.

PROVIDE THE DEPARTMENT WITH A COPY OF ALL USACE COORDINATION OR APPROVAL(S) PRIOR TO INITIATING ANY ACTIVITIES FOR AN AREA WITHIN THE PROJECT LIMITS THAT HAS NOT BEEN EVALUATED BY THE USACE OR FOR ANY OFF RIGHT OF WAY LOCATIONS USED FOR THE FOLLOWING, BUT NOT LIMITED TO, HAUL ROADS, EQUIPMENT STAGING AREAS, BORROW AND DISPOSAL SITES:

- ITEM 132, EMBANKMENT, USED FOR TEMPORARY OR PERMANENT FILL WITHIN A USACE PERMIT AREA; AND,
- UNSUITABLE EXCAVATION OR EXCESS EXCAVATION [“WASTE”] (ITEM 110, EXCAVATION) THAT IS DISPOSED OF OUTSIDE A USACE EVALUATED AREA.

THE DISTURBED AREA IN THIS PROJECT, ALL PROJECT LOCATIONS IN THE CONTRACT, AND THE CONTRACTOR’S PROJECT SPECIFIC LOCATIONS (PSLS), WITHIN ONE (1) MILE OF THE PROJECT LIMITS, FOR THE CONTRACT WILL FURTHER ESTABLISH THE AUTHORIZATION REQUIREMENTS FOR STORM WATER DISCHARGES. THE DEPARTMENT WILL OBTAIN AN AUTHORIZATION TO DISCHARGE STORM WATER FROM THE TEXAS COMMISSION ON ENVIRONMENTAL QUALITY (TCEQ) FOR THE CONSTRUCTION ACTIVITIES SHOWN ON THE PLANS. THE CONTRACTOR IS TO OBTAIN REQUIRED AUTHORIZATION FROM THE TCEQ FOR CONTRACTOR PSLs FOR CONSTRUCTION SUPPORT ACTIVITIES ON OR OFF THE ROW. WHEN THE TOTAL AREA DISTURBED IN THE CONTRACT AND PSLs WITHIN ONE (1) MILE OF THE PROJECT LIMITS EXCEEDS FIVE (5) ACRES, PROVIDE A COPY OF THE CONTRACTOR’S NOI

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

FOR PSLs ON THE ROW TO THE ENGINEER AND TO THE LOCAL GOVERNMENT THAT OPERATES A SEPARATE STORM SEWER SYSTEM.

“NO SIGNIFICANT TRAFFIC GENERATOR EVENTS IDENTIFIED”

ITEM 8 – PROSECUTION AND PROGRESS

WORKING DAYS WILL BE CHARGED IN ACCORDANCE WITH ARTICLE 8.3.1.4, STANDARD WORKWEEK.

PROVIDE A MINIMUM OF 2 WORKING DAYS ADVANCED NOTICE TO THE ENGINEER FOR REQUESTS TO PERFORM WORK ON SATURDAYS. NO WORK ON SUNDAYS OR NATIONAL HOLIDAYS WILL BE ALLOWED.

SUBMIT WRITTEN REQUESTS TO THE ENGINEER FOR CONSIDERATION OF TEMPORARY SUSPENSION OF WORK AND/OR WORKING DAY CHARGES DUE TO CONDITIONS NOT UNDER THE CONTROL OF THE CONTRACTOR. SUCH REQUESTS WILL BE EVALUATED BY THE ENGINEER ON A CASE-BY-CASE BASIS AND A WRITTEN RESPONSE WILL BE PROVIDED TO THE CONTRACTOR.

COORDINATE WITH THE ENGINEER TO DETERMINE THE APPROPRIATE PROJECT SCHEDULE TYPE IN ACCORDANCE WITH ARTICLE 5.5 PRIOR TO SUBMISSION OF THE BASELINE SCHEDULE.

ITEM 134 - BACKFILL PAVEMENT EDGES

WINDROW APPROXIMATELY 4” OF EXISTING TOPSOIL PRIOR TO BEGINNING OPERATIONS. UPON COMPLETION OF OPERATIONS, RETURN THE WINDROWED MATERIAL TO THE SLOPES AND DITCHES AS A PERMANENT EROSION CONTROL MEASURE. THIS WORK WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED SUBSIDIARY TO PERTINENT BID ITEMS.

SHOULDER UP PAVEMENT EDGES AT THE END OF EACH WORKING DAY TO ENSURE SLOPES OF 4:1 OR FLATTER OFF OF THE EDGE OF PAVEMENT. PAYMENT FOR BACKFILL OF PAVEMENT EDGES WILL ONLY BE MADE ONCE FOR THE FINAL ROADWAY SECTION.

APPLY EMULSIFIED ASPHALT TO THE BACKFILLED MATERIAL AFTER IT HAS BEEN ROLLED AND SEEDED.

ITEM 164 – SEEDING FOR EROSION CONTROL

ALL SEEDED AREAS OF THE PROJECT SHALL BE FERTILIZED WITH 60 POUNDS OF NITROGEN PER ACRE. FERTILIZER WILL NOT BE PAID FOR DIRECTLY BUT WILL BE SUBSIDIARY TO PERTINENT BID ITEMS.

ITEM 300 – ASPHALTS, OILS AND EMULSIONS

PROVIDE DOCUMENTATION THAT INCLUDES THE CURRENT LAB NUMBER SHOWING THAT THE OIL SAMPLE HAS BEEN PRE-TESTED AND APPROVED FOR THE MONTH OF APPLICATION. THIS DOCUMENTATION MUST BE PROVIDED AND VERIFIED BY THE ENGINEER PRIOR TO APPLICATION OF THE MATERIAL.

DO NOT DILUTE EMULSIFIED ASPHALT WITH ADDITIONAL WATER UNDER ANY CIRCUMSTANCES. PROVIDE EMULSIONS MEETING THE REQUIREMENTS UNDER ITEM 300.

CSJ: 0105-02-023, ETC.

SHEET:

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

ITEM 421 – HYDRAULIC CEMENT CONCRETE

THE CONTRACTOR WILL SAMPLE ALL CONCRETE AND TEST ACCORDING TO TEX-414-A OR TEX-416-A (IF AIR ENTRAINED CONCRETE IS SPECIFIED), TEX-415-A, TEX-422-A, AND TEX-447-A. CONTRACTOR PERSONNEL PERFORMING TESTING MUST BE ACI CERTIFIED. PERSONNEL PERFORMING THESE TESTS ARE SUBJECT TO DEPARTMENT APPROVAL. USE OF A COMMERCIAL LABORATORY IS PERMITTED.

THE CONTRACTOR WILL NOT BE REQUIRED TO SUPPLY COMPRESSION TESTING EQUIPMENT. TXDOT PERSONNEL WILL PERFORM THE COMPRESSION TESTING.

PROVIDE THE ENGINEER WITH ACI CERTIFICATES, CURRENT EQUIPMENT CALIBRATION RECORDS, AND THE EMAIL ADDRESSES OF TESTING PERSONNEL.

ITEM 422 – CONCRETE SUPERSTRUCTURES

USE OF A SELF-PROPELLED TRANSVERSE SCREED WILL BE REQUIRED FOR BRIDGE SLABS AND THE TOP SLABS OF DIRECT-DRIVE CULVERTS. THE USE OF LONGITUDINAL SCREEDS WILL NOT BE ALLOWED. THE USE OF MANUALLY OPERATED SCREEDS WILL NOT BE ALLOWED.

ITEM 427 - SURFACE FINISHES FOR CONCRETE

PROVIDE A SURFACE AREA I RUB FINISH UNLESS OTHERWISE APPROVED BY THE ENGINEER.

ITEM 432 – RIPRAP

CONCRETE RUBBLE GENERATED FROM DEMOLITION OF THE EXISTING BRIDGE MAY BE USED FOR STONE PROTECTION RIPRAP ON THE PROJECT WITH THE ENGINEER'S APPROVAL.

ITEM 440 – REINFORCING STEEL

ALL REINFORCING STEEL LOCATED IN APPROACH SLABS, ABUTMENTS, BRIDGE DECKS, TOP SLABS OF DIRECT TRAFFIC CULVERTS, AND CAPS WILL BE **GALVANIZED**.

ITEM 460 – CORRUGATED METAL PIPE

CONCRETE COLLARS NEEDED TO CONNECT PIPES TO EXISTING OR PROPOSED BOXES OR PIPES WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED SUBSIDIARY TO PERTINENT BID ITEMS.

ITEM 467 – SAFETY END TREATMENT

THE CONTRACTOR WILL POUR AN APRON ON ALL BOX CULVERTS THAT ARE TO BE TREATED WITH SAFETY END TREATMENTS. THERE WILL BE NO CONSTRUCTION JOINTS ALLOWED IN THIS FOOTING. THIS APRON WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED SUBSIDIARY TO PERTINENT BID ITEMS.

ITEM 502 - BARRICADES, SIGNS, AND TRAFFIC HANDLING

THE CONTRACTOR'S RESPONSIBLE PERSON FOR TCP COMPLIANCE SHALL BE AVAILABLE BY PHONE AND SHALL HAVE A RESPONSE TIME WITHIN 45 MINUTES.

CSJ: 0105-02-023, ETC.

SHEET:

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

WORK WILL NOT BE ALLOWED ON BOTH SIDES OF THE ROAD AT THE SAME TIME UNLESS OTHERWISE APPROVED BY THE ENGINEER.

ALL EQUIPMENT AND MATERIALS SHALL BE STORED OUTSIDE THE ROADWAY CLEAR ZONE.

EQUIP ALL WORK VEHICLES WITHIN 30 FEET OF THE TRAVELED WAY WITH A FUNCTIONING AMBER STROBE LIGHT OR ROTATING BEACON VISIBLE FROM ALL DIRECTIONS.

THE CONTRACTOR SHALL TAKE ACTION AT THE TIME OF RECEIPT OF THE BARRICADE INSPECTION IN ACORDANCE WITH THE DEFICIENCY PRIORITY. MAKE CORRECTIONS WITHIN 1 CALENDAR DAY FOR A PRIORITY 1 DEFICIENCY, OR WITHIN 7 CALENDAR DAYS FOR A PRIORITY 2 DEFICIENCY. THE ENGINEER MAY REQUIRE THE TEMPORARY SUSPENSION OF WORK WITHOUT SUSPENSION OF TIME CHARGES FOR FAILURE TO MAKE CORRECTIONS WITHIN THE APPROPRIATE TIME FRAMES.

THE CONTRACTOR FORCE ACCOUNT "SAFETY CONTINGENCY" THAT HAS BEEN ESTABLISHED FOR THIS PROJECT IS INTENDED TO BE UTILIZED FOR WORK ZONE ENHANCEMENTS AND TO IMPROVE THE EFFECTIVENESS OF THE TRAFFIC CONTROL PLAN. THESE ENHANCEMENTS WILL BE MUTUALLY AGREED UPON BY THE ENGINEER AND THE CONTRACTOR'S RESPONSIBLE PERSON IN WRITING. THE ENGINEER MAY CHOOSE TO USE EXISTING BID ITEMS IF IT DOES NOT SLOW THE IMPLEMENTATION OR ENHANCEMENT.

ITEM 506 – TEMPORARY EROSION, SEDIMENTATION, AND ENVIRONMENTAL CONTROLS

THE ENGINEER MAY REQUIRE THE TEMPORARY SUSPENSION OF WORK WITHOUT SUSPENSION OF TIME CHARGES FOR FAILURE TO MAKE CORRECTIONS TO DEFICIENCIES NOTED ON FORM 2118 WITHIN THE APPROPRIATE TIME FRAMES.

ITEM 510 – ONE-WAY TRAFFIC CONTROL

WHEN PORTABLE TRAFFIC SIGNALS ARE UTILIZED, THE CONTRACTOR SHALL PROVIDE VISIBLE COUNTDOWN TIMERS CAPABLE OF SHOWING THE WAIT TIME FOR STOPPED TRAFFIC, UNLESS OTHERWISE APPROVED BY THE ENGINEER. SUCH DEVICES WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED SUBSIDIARY TO PERTINENT BID ITEMS.

ITEM 585 – RIDE QUALITY FOR PAVEMENT SURFACES

USE SURFACE TEST TYPE "B" FOR FINISHED RIDING SURFACES OF NEWLY CONSTRUCTED TRAVEL LANES.

USE PAY ADJUSTMENT SCHEDULE 2.

ITEM 666 - REFLECTORIZED PAVEMENT MARKINGS

THE CONTRACTOR SHALL PLACE GUIDE MARKS TO ESTABLISH THE LOCATION OF THE PROPOSED PAVEMENT MARKINGS. THE CONTRACTOR MAY USE YELLOW TABS SPACED AT 40' ON CENTER OR OTHER METHODS NOT NOTED IN THE PLANS. ALTERNATE METHODS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO STRIPING. ANY ALTERNATE GUIDE MARKINGS PLACED WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED SUBSIDIARY TO PERTINENT BID ITEMS.

CSJ: 0105-02-023, ETC.

SHEET:

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

ITEM 672 – RAISED PAVEMENT MARKERS

REMOVE EXISTING RAISED PAVEMENT MARKINGS AS THE WORK PROGRESSES, OR AS DIRECTED BY THE ENGINEER. REMOVAL SHALL TAKE PLACE IN CONCURRENCE WITH THE PROPOSED TCP PHASING UNLESS OTHERWISE DIRECTED. REMOVAL OF EXISTING RPMS WILL NOT BE PAID FOR DIRECTLY BUT WILL BE CONSIDERED SUBSIDIARY TO PERTINENT BID ITEMS.

ITEM 677 – ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS

IN ACCORDANCE WITH THE TEXAS MUTCD, BLACK PAVEMENT MARKINGS WILL NOT BE ACCEPTED AS A SUBSTITUTE FOR REMOVAL OF EXISTING PAVEMENT MARKINGS.

ITEM 3076 – DENSE GRADED HOT-MIX ASPHALT

ANY REPAIRS MADE TO NEW HOTMIX WILL BE PERFORMED FULL LANE WIDTH OR FULL SHOULDER WIDTH AT THE CONTRACTOR’S EXPENSE.

MINIMUM CRUSHED FACE COUNT FOR COURSE GRAVEL AGGREGATE IS 95%.

MINERAL FILLER OTHER THAN DRIED STONE DUST MUST BE APPROVED.

LIME OR LIQUID ANTISTRIPPING AGENT WILL BE REQUIRED.

DESIGN THE MIXTURE USING A SUPERPAVE GYRATORY COMPACTOR (SGC) AT 50 GYRATIONS.

TARGET LAB MOLDED DENSITY IS 97.0%.

MINIMUM ASPHALT CONTENT WILL BE 5%.

TEX-530-C BOIL TEST WILL BE WAIVED.

TWO (2) VERIFICATION TESTS PER DESIGN WILL BE PERFORMED BY THE CHILDRESS DISTRICT LABORATORY. ANY ADDITIONAL DESIGN VERIFICATION TESTING WILL BE PAID FOR BY THE CONTRACTOR AT \$5,000 EACH.

THE MAXIMUM CONTENT OF RECYCLED MATERIALS FOR ALL HOT MIX ASPHALT CONCRETE SHALL BE 10%.

RAS WILL NOT BE ALLOWED.

A MATERIAL TRANSFER VEHICLE (MTV) WITH REMIXING CAPABILITIES WILL BE REQUIRED.

A TAPERED LONGITUDINAL JOINT WILL BE REQUIRED UNLESS OTHERWISE APPROVED BY THE ENGINEER.

ITEM 3076 – TACK COAT

TRACKING RESISTANT ASPHALT INTERLAYER (TRAIL) APPROVED MATERIALS SHALL BE USED FOR TACK COAT.

CSJ: 0105-02-023, ETC.

SHEET:

COUNTY: HALL

HIGHWAY: SH 86/ SH 70

ITEM 6185 – TRUCK MOUNTED ATTENUATOR (TMA) AND TRAILER ATTENUATOR (TA)

THERE WILL BE NO ADDITIONAL SHADOW VEHICLES OR TMA REQUIRED IN ADDITION TO THE SHADOW VEHICLES WITH TRUCK MOUNTED ATTENUATOR (TMA) THAT ARE SPECIFIED AS BEING REQUIRED ON THE TRAFFIC CONTROL PLAN STANDARDS FOR THIS PROJECT.

REFERENCE THE TABLE BELOW FOR TMA REQUIRED PER TCP STANDARD OPERATION. THE CONTRACTOR WILL BE RESPONSIBLE FOR DETERMINING IF ONE OR MORE OF THESE OPERATIONS WILL BE ONGOING AT THE SAME TIME TO DETERMINE THE TOTAL NUMBER OF TMA’S NEEDED FOR THE PROJECT.

BASIS OF ESTIMATE FOR STATIONARY TMAs				
		TMA (STATIONARY)		
PHASE	STANDARD	REQUIRED	ADDITIONAL	TOTAL
OVERLAY	TCP (1-1)-18	1	0	1
OVERLAY	TCP (1-2)-18	1	0	1
CULVERT REPLACEMENT	TCP (2-1)-18	1	0	1
CULVERT REPLACEMENT	TCP (2-2)-18	1	0	1
CULVERT REPLACEMENT	TCP (2-8)-23	0	0	0

BASIS OF ESTIMATE FOR MOBILE TMAs				
		TMA (MOBILE)		
PHASE	STANDARD	REQUIRED	ADDITIONAL	TOTAL
STRIPING	TCP (3-1)-13	2	0	2
RPMS	TCP (3-3)-14	2	0	2



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0105-02-023

DISTRICT Childress
HIGHWAY SH 70, SH 86

COUNTY Hall

CONTROL SECTION JOB				0105-02-023		0105-02-026		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00123511		A00183344			
COUNTY				Hall		Hall			
HIGHWAY				SH 86		SH 70			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL		
	132-6002	EMBANKMENT (FINAL)(DENS CONT)(TY A)	CY	200.000				200.000	
	134-6004	BACKFILL (TY A OR B)	STA	437.000		20.000		457.000	
	150-6002	BLADING	HR	4.000		1.000		5.000	
	164-6034	DRILL SEEDING (PERM) (RURAL) (SANDY)	AC	20.100		0.900		21.000	
	164-6053	DRILL SEEDING (TEMP)(WARM OR COOL)	AC	20.100		0.900		21.000	
	168-6001	VEGETATIVE WATERING	MG	1,634.000		77.000		1,711.000	
	314-6013	EMULS ASPH (EROSN CONT)(CSS-1H)	GAL	19,420.000		915.000		20,335.000	
	354-6021	PLANE ASPH CONC PAV(0" TO 2")	SY	800.000		800.000		1,600.000	
	401-6001	FLOWABLE BACKFILL	CY	35.000				35.000	
	432-6035	RIPRAP (STONE PROTECTION)(24 IN)	CY	41.480				41.480	
	462-6014	CONC BOX CULV (7 FT X 3 FT)	LF	114.000				114.000	
	467-6245	SET (TY I)(S= 7 FT)(HW= 4 FT)(4:1) (C)	EA	6.000				6.000	
	496-6001	REMOV STR (BOX CULVERT)	EA	1.000				1.000	
	496-6005	REMOV STR (WINGWALL)	EA	2.000				2.000	
	500-6001	MOBILIZATION	LS	1.000				1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	5.000				5.000	
	506-6042	BIODEG EROSN CONT LOGS (INSTL) (18")	LF	300.000				300.000	
	510-6003	ONE-WAY TRAF CONT (PORT TRAF SIG)	MO	3.000				3.000	
	512-6013	PORT CTB (DES SOURCE)(SGL SLP)(TY 1)	LF	300.000				300.000	
	512-6025	PORT CTB (MOVE)(SGL SLP)(TY 1)	LF	300.000				300.000	
	512-6037	PORT CTB (STKPL)(SGL SLP)(TY 1)	LF	300.000				300.000	
	533-6003	RUMBLE STRIPS (SHOULDER) ASPHALT	LF	86,527.000		4,120.000		90,647.000	
	533-6004	RUMBLE STRIPS (CENTERLINE) ASPHALT	LF	43,694.000		2,059.000		45,753.000	
	545-6002	CRASH CUSH ATTEN (DES SOURCE)	EA	4.000				4.000	
	545-6003	CRASH CUSH ATTEN (MOVE & RESET)	EA	4.000				4.000	
	545-6004	CRASH CUSH ATTEN (STKPL)	EA	4.000				4.000	
	658-6100	INSTL OM ASSM (OM-2Z)(WFLX)GND(BI)	EA	4.000				4.000	
	662-6050	WK ZN PAV MRK REMOV (REFL) TY II-A-A	EA	360.000				360.000	
	662-6063	WK ZN PAV MRK REMOV (W)4"(SLD)	LF	1,100.000				1,100.000	
	662-6075	WK ZN PAV MRK REMOV (W)24"(SLD)	LF	24.000				24.000	
	662-6095	WK ZN PAV MRK REMOV (Y)4"(SLD)	LF	14,400.000				14,400.000	
	662-6110	WK ZN PAV MRK SHT TERM (TAB)TY Y	EA	6,532.000		136.000		6,668.000	
	666-6048	REFL PAV MRK TY I (W)24"(SLD)(100MIL)	LF	24.000				24.000	
	666-6309	RE PM W/RET REQ TY I (W)6"(SLD)(100MIL)	LF	86,575.000		4,120.000		90,695.000	
	666-6318	RE PM W/RET REQ TY I (Y)6"(BRK)(100MIL)	LF	8,860.000		520.000		9,380.000	
	666-6321	RE PM W/RET REQ TY I (Y)6"(SLD)(100MIL)	LF	43,960.000		770.000		44,730.000	
	672-6009	REFL PAV MRKR TY II-A-A	EA	990.000		35.000		1,025.000	

DISTRICT	COUNTY	CCSJ	SHEET
Childress	Hall	0105-02-023	008



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0105-02-023

DISTRICT Childress
HIGHWAY SH 70, SH 86

COUNTY Hall

CONTROL SECTION JOB				0105-02-023		0105-02-026		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00123511		A00183344			
COUNTY				Hall		Hall			
HIGHWAY				SH 86		SH 70			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL		
	677-6001	ELIM EXT PAV MRK & MRKS (4")	LF	2,780.000				2,780.000	
	3076-6045	D-GR HMA TY-D SAC-A PG70-28	TON	32,132.000		1,510.000		33,642.000	
	3076-6066	TACK COAT	GAL	29,211.000		1,373.000		30,584.000	
	6001-6002	PORTABLE CHANGEABLE MESSAGE SIGN	EA	2.000				2.000	
	6056-6001	PREFORMED IN-LANE(TRANS) RUMBLE STRIP	LF	144.000				144.000	
	6185-6002	TMA (STATIONARY)	DAY	5.000		1.000		6.000	
	6185-6003	TMA (MOBILE OPERATION)	HR	48.000		8.000		56.000	
	08	CONTRACTOR FORCE ACCOUNT EROSION CONTROL MAINTENANCE (NON-PARTICIPATING)	LS	1.000				1.000	
		CONTRACTOR FORCE ACCOUNT SAFETY CONTINGENCY (NON-PARTICIPATING)	LS	1.000				1.000	

CK: DW: CK: DN:

ROADWAY SUMMARY

LOCATION	LENGTH	134 6004	150 6002	354 6021	533 6003	533 6004	3076 6045	3076 6045	3076 6066
		BACKFILL (TY A OR B)	BLADING	PLANE ASPH CONC PAV (0"-2")	RUMBLE STRIP (SHOULDER) ASPHALT	RUMBLE STRIP (CENTERLINE) ASPHALT	D-GR HMA TY-D SAC-A PG 70-28 (220LBS/SY) (LEVEL UP)	D-GR HMA TY-D SAC-A PG 70-28 (220LBS/SY)	TACK COAT (0.10 GAL/SY)
		STA	HR	SY	LF	LF	TON	TON	GAL
CSJ: 0105-02-023									
STA. 336+21.60 TO STA. 773+40.00	43,718.40	437	4	800	86,527	43,694	* 12,817	* 19,226	29,130
INTERSECTION SUMMARY									
CSJ: 0105-02-026									
STA. 315+62.40 TO STA. 336+21.60	2,059.20	20	1	800	4,120	2,059	604	906	1,373
PROJECT TOTALS		457	5	1,600	90,647	45,753	13,421	20,221	30,584

* QUANTITY ADJUSTED TO ACCOMODATE CULVERT REPLACEMENT AS DIRECT DRIVE.

EROSION CONTROL SUMMARY

STATION	164 6034	164 6053	168 6001	314 6013	506 6042	
	DRILL SEEDING (PERM)(RURAL) (SANDY)	DRILL SEEDING (TEMP) (WARM OR COOL)	VEGETATIVE WATERING	EMULS ASPH (EROSN CONT) (CSS-1H)	BIODEG EROSN CONT LOGS (INSTL) (18")	
	AC	AC	MG	GAL	LF	
CSJ: 0105-02-023						
STA. 336+21.60 TO STA. 773+40.00	20.1	20.1	1,634	19,420	300	
CSJ: 0105-02-026						
STA. 315+62.40 TO STA. 336+21.60	0.9	0.9	77	915		
PROJECT TOTALS		21.0	21.0	1,711	20,335	300

CULVERT SUMMARY

STATION	132 6002	401 6001	432 6035	462 6014	467 6245	496 6001	496 6005	658 6100
	EMBANKMENT (FINAL) (DENS CONT) (TYA)	FLOWABLE BACKFILL	RIPRAP (STONE PROTECTION) (24 IN)	CONC BOX CULV (7 FT X 3 FT)	SET (TY 1) (S = 7 FT) (HW = 4 FT) (4:1)(C)	REMOV STR (BOX CULVERT)	REMOV STR (WINGWALL)	INSTL OM ASSM (OM-2Z)(WFLX) GND(BI)
	CY	CY	CY	LF	EA	EA	EA	EA
CSJ: 0105-02-023								
STA. 570+46.92 TO STA. 570+69.08	200	35	41.48	114	6	1	2	4
PROJECT TOTALS		200	35	41.48	114	6	1	4

STRIPING SUMMARY

STATION	666 6048	666 6309	666 6318	666 6321	672 6009	
	REFL PAV MRK TY I (W)24"(SLD) (100MIL)	RE PM W/RET REQ TY I (W) 6"(SLD) (100MIL)	RE PM W/RET REQ TY I (Y) 6"(BRK) (100MIL)	RE PM W/RET REQ TY I (Y) 6"(SLD) (100MIL)	REFL PAV MRKR TY II-A-A	
	LF	LF	LF	LF	EA	
CSJ: 0105-02-023						
STA. 336+21.60 TO STA. 773+40.00	24	86,575	8,860	43,960	990	
CSJ: 0105-02-026						
STA. 315+62.40 TO STA. 336+21.60	-	4,120	520	770	35	
PROJECT TOTALS		24	90,695	9,380	44,730	1,025

SH 86
QUANTITY SUMMARY

DATE: 8/3/2023 11:37:10 AM
FILE: I:\CHSD\DESIGN\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan_Sheets\General\Quantity_Summary.dgn

DATE: 8/2/2023 12:04:07 PM
 FILE: I:\CHSD\DES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan_Sheets\General\Quantity_Summary.dgn

WORK ZONE TRAFFIC CONTROL SUMMARY

STATION	510 6003	512 6013	512 6025	512 6037	545 6002	545 6003	545 6004	6001 6002	6056 6001
	ONE-WAY TRAF CONT (PORT TRAF SIG)	PORT CTB (DES SOURCE) (SGL SLP) (TY 1)	PORT CTB (MOVE) (SGL SLP) (TY 1)	PORT CTB (STKPL) (SGL SLP) (TY 1)	CRASH CUSH ATTEN (DES SOURCE)	CRASH CUSH ATTEN (MOVE & RESET)	CRASH CUSH ATTEN (STKPL)	PORTABLE CHANGEABLE MESSAGE SIGN	PREFORMED IN-LANE (TRANS) RUMBLE STRIPS
	MO	LF	LF	LF	EA	EA	EA	EA	LF
CSJ: 0105-02-023									
STA. 570+46.34 TO STA. 570+69.66	3	300	300	300	4	4	4	2	144
PROJECT TOTALS	3	300	300	300	4	4	4	2	144


WORK ZONE SUMMARY

LOCATION	662 6050	662 6063	662 6075	662 6095	662 6110	677 6001	6185 6002	6185 6003
	WK ZN PAV MRK REMOV (REFL) TY II-A-A	WK ZN PAV MRK REMOV (W)4"(SLD)	WK ZN PAV MRK REMOV (W)24"(SLD)	WK ZN PAV MRK REMOV (Y)4"(SLD)	WK ZN PAV MRK SHT TERM (TAB) TY Y	ELIM EXT PAV MRK & MRKS (4")	TMA (STATIONARY)	TMA (MOBILE OPERATION)
	EA	LF	LF	LF	EA	LF	DAY	HR
CSJ: 0105-02-023								
STA. 336+21.60 TO STA. 773+40.00	360	1,100	24	14,400	6,532	2,780	5	48
CSJ: 0105-02-026								
STA. 315+62.40 TO STA. 336+21.60	-	-	-	-	136	-	1	8
PROJECT TOTALS	360	1,100	24	14,400	6,668	2,780	6	56

SH 86
 QUANTITY SUMMARY




CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY		SHEET NO.
CHS	HALL		11

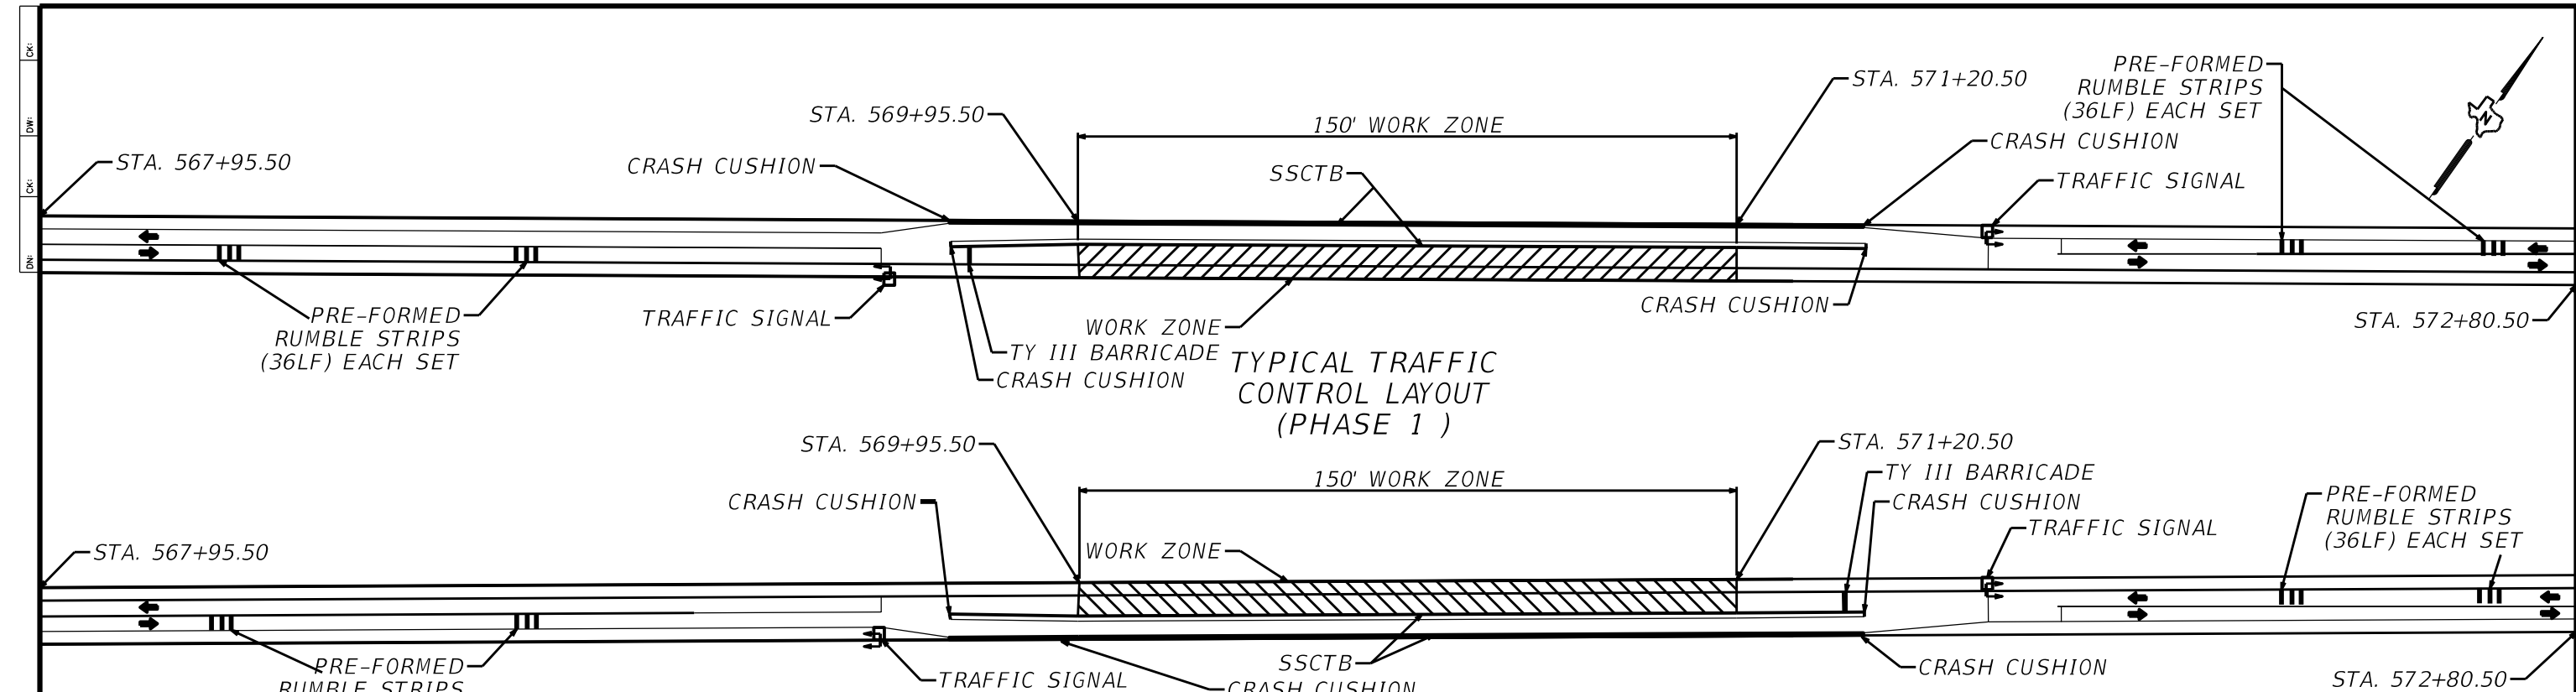


TYPICAL TRAFFIC CONTROL LAYOUT (PHASE 1)

TYPICAL TRAFFIC CONTROL LAYOUT (PHASE 2)

NOTES:
 SEE TCP (2-8)-18 FOR DETAILS ON SIGN SPACING, WORKZONE STRIPES, SIGNS, ETC.
 THE ABOVE LAYOUT IS TYPICAL FOR EACH PHASE AND MAY BE MODIFIED AS DIRECTED BY THE ENGINEER.
 MESSAGE BOARDS SHALL BE SET UP IN ADVANCE OF WORK ZONE AS DIRECTED BY THE ENGINEER.
 PLACEMENT OF TEMPORARY RUMBLE STRIPS SHALL BE PER RS(5)-13 UNLESS MODIFICATION IS APPROVED BY THE ENGINEER. USE PRE-FORMED MELT-ON STYLE RUMBLE STRIPS THAT WILL REMAIN ADHERED TO THE SURFACE.

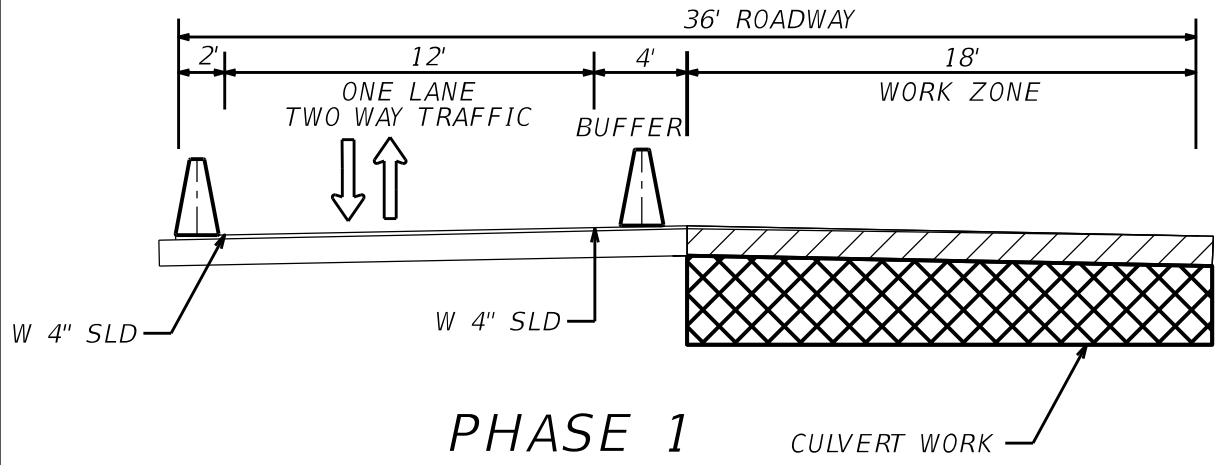


PHASE 1

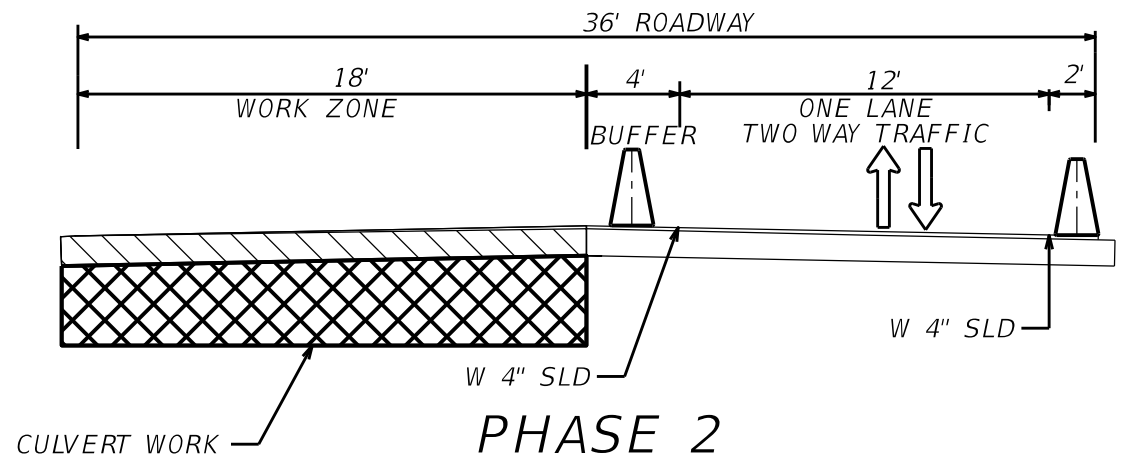

PHASE 2

1. SHIFT TRAFFIC TO THE WESTBOUND LANE UTILIZING FLAGGER CONTROL WHILE PREPARING FOR ONE LANE TWO-WAY TRAFFIC ON THE WB SIDE.
2. PLACE WK ZONE STRIPES & SSCTB AS SHOWN ABOVE AND ON SH 86 TRAFFIC CONTROL LAYOUT SHEETS.
3. COMPLETE ALL NECESSARY WORK AS SHOWN ON CORRESPONDING CULVERT LAYOUT SHEETS AS DIRECTED BY THE ENGINEER.

1. SHIFT TRAFFIC TO THE EASTBOUND LANE UTILIZING FLAGGER CONTROL WHILE PREPARING FOR ONE LANE TWO-WAY TRAFFIC ON THE EB SIDE.
2. PLACE WK ZONE STRIPES & SSCTB AS SHOWN ABOVE AND ON SH 86 TRAFFIC CONTROL LAYOUT SHEETS.
3. COMPLETE ALL NECESSARY WORK AS SHOWN ON CORRESPONDING CULVERT LAYOUT SHEETS AS DIRECTED BY THE ENGINEER.
4. SHIFT TRAFFIC BACK TO ORIGINAL CONFIGURATION AND PREPARE FOR OVERLAY.



TRAFFIC CONTROL LAYOUT & SEQUENCE OF WORK (SH 86 @ DRAW)

CULVERT WORK ONLY
 Texas Department of Transportation
 SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY		SHEET NO.
CHS	HALL		12

DATE: 8/1/2023 11:11 PM
 FILE: I:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan_Sheets\General\Traffic control.dgn

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.


COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

<p>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov</p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information contained herein to any other format.

DATE: 8/11/2023 8:47:03 PM
 FILE: T:\CHSDES\PROJECTS\HALL\10105-02-023 (SH 86) REMOVAL PLAN SHEETS\STANDARD SHEETS\TRAFFIC CONTROL\bc-21.dgn

 Texas Department of Transportation		Traffic Safety Division Standard		
<p>BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS</p> <p>BC(1)-21</p>				
FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS 4-03 7-13 9-07 8-14 5-10 5-21		01050223, ETC, SH 70/86		
DIST	COUNTY	SHEET NO.		
CHS	HALL	13		


DATE: 8/1/2023
 FILE: T:\CHSD\PROJECTS\HALL\105-02-023 (SH 86)
 8:49:27 PM
 86
 STANDARD SHEETS
 PROJECT TOP OF BC-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units.

TYPICAL LOCATION OF CROSSROAD SIGNS

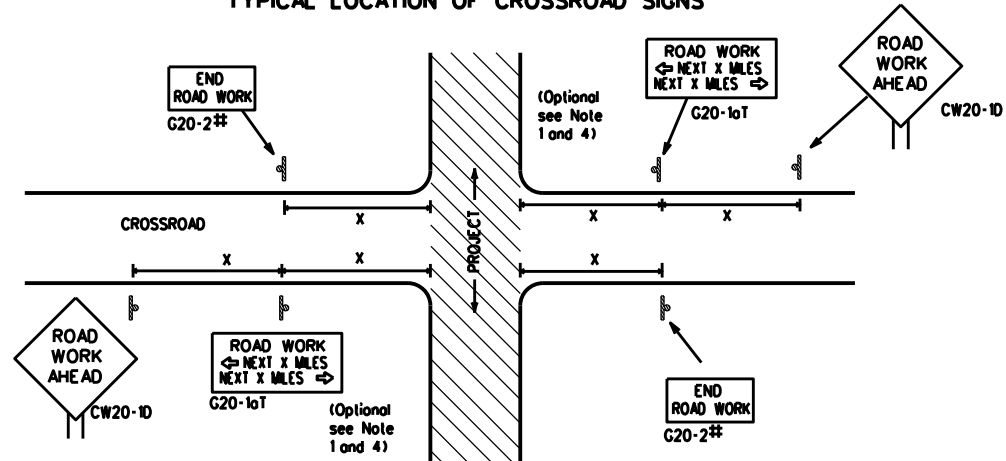

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
 - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
 - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
 - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
 - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
 - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

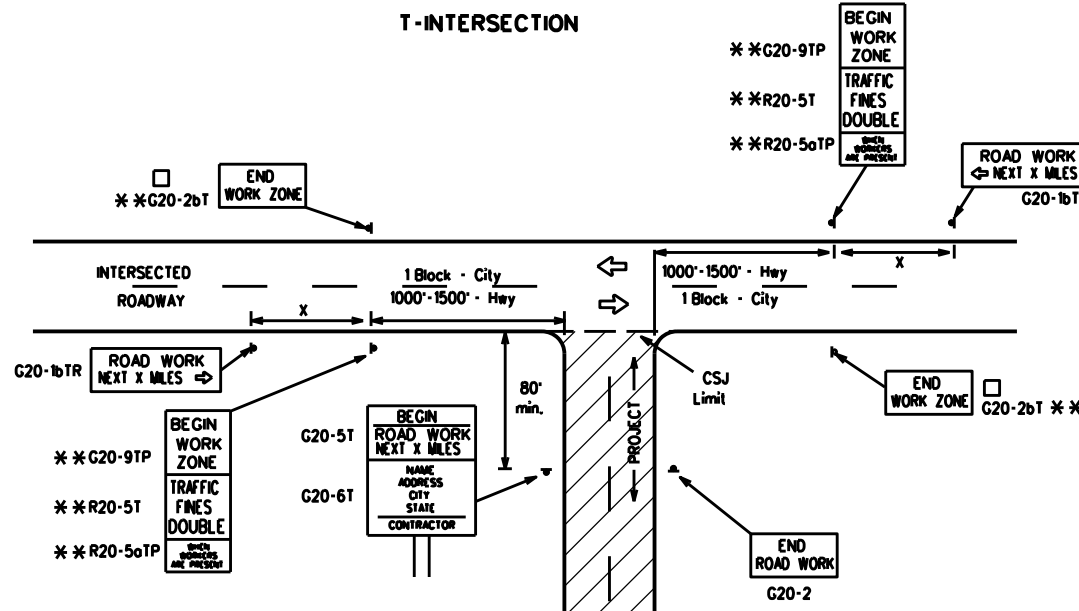

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING


Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Spacing "X" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW23			40	240
CW25			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
*			*	* ³

- For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.
- Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

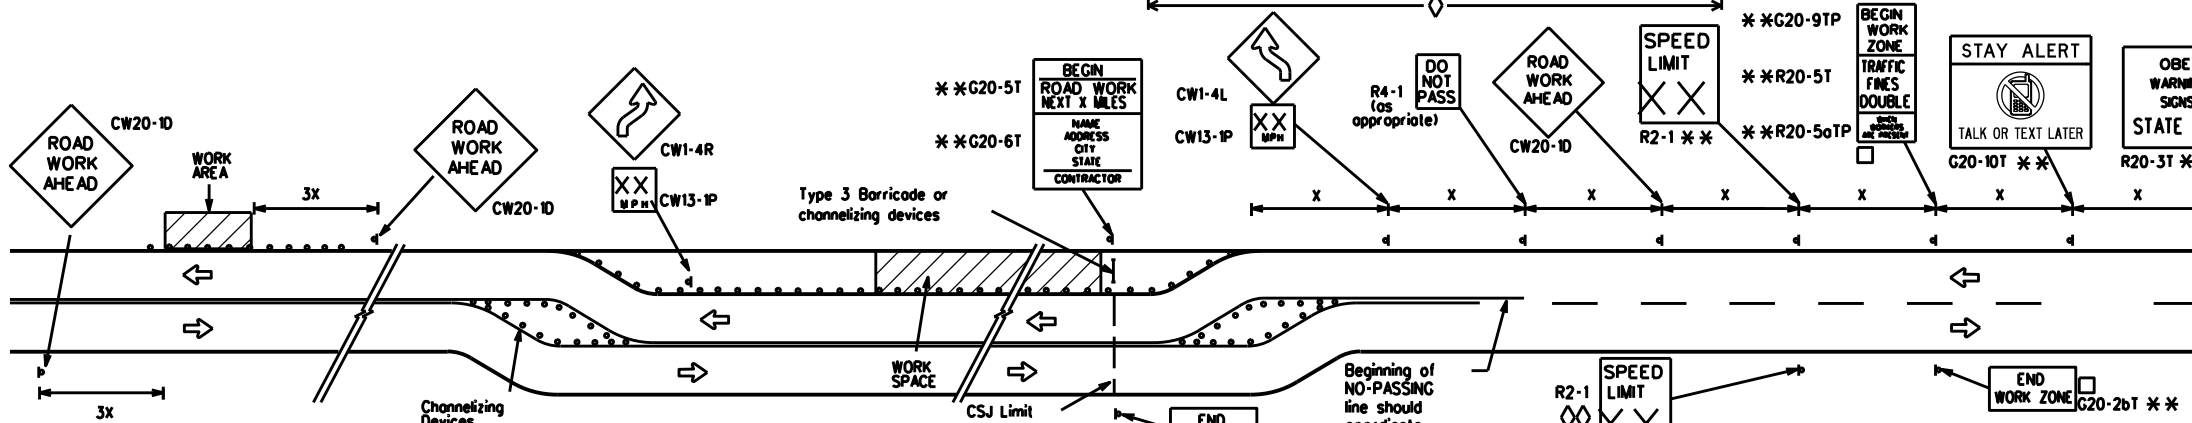

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

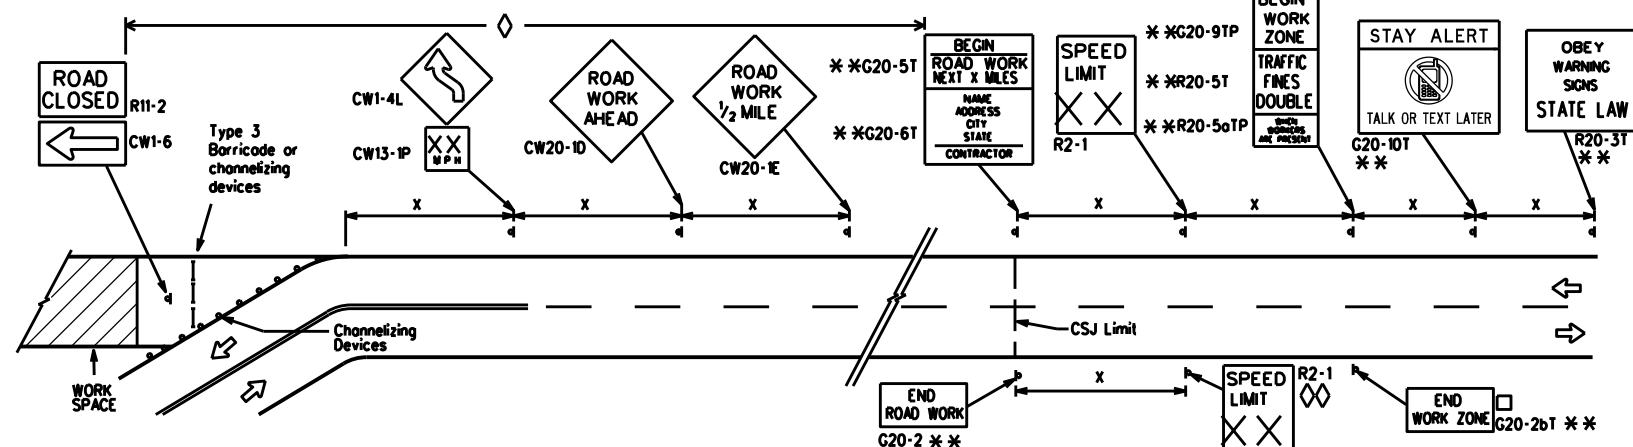


NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
- CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
- Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



BARRICADE AND CONSTRUCTION PROJECT LIMIT


BC(2)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223, ETC, SH 70/86			
9-07	8-14	DIST	COUNTY	SHEET NO.
7-13	5-21	CHS	HALL	14

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

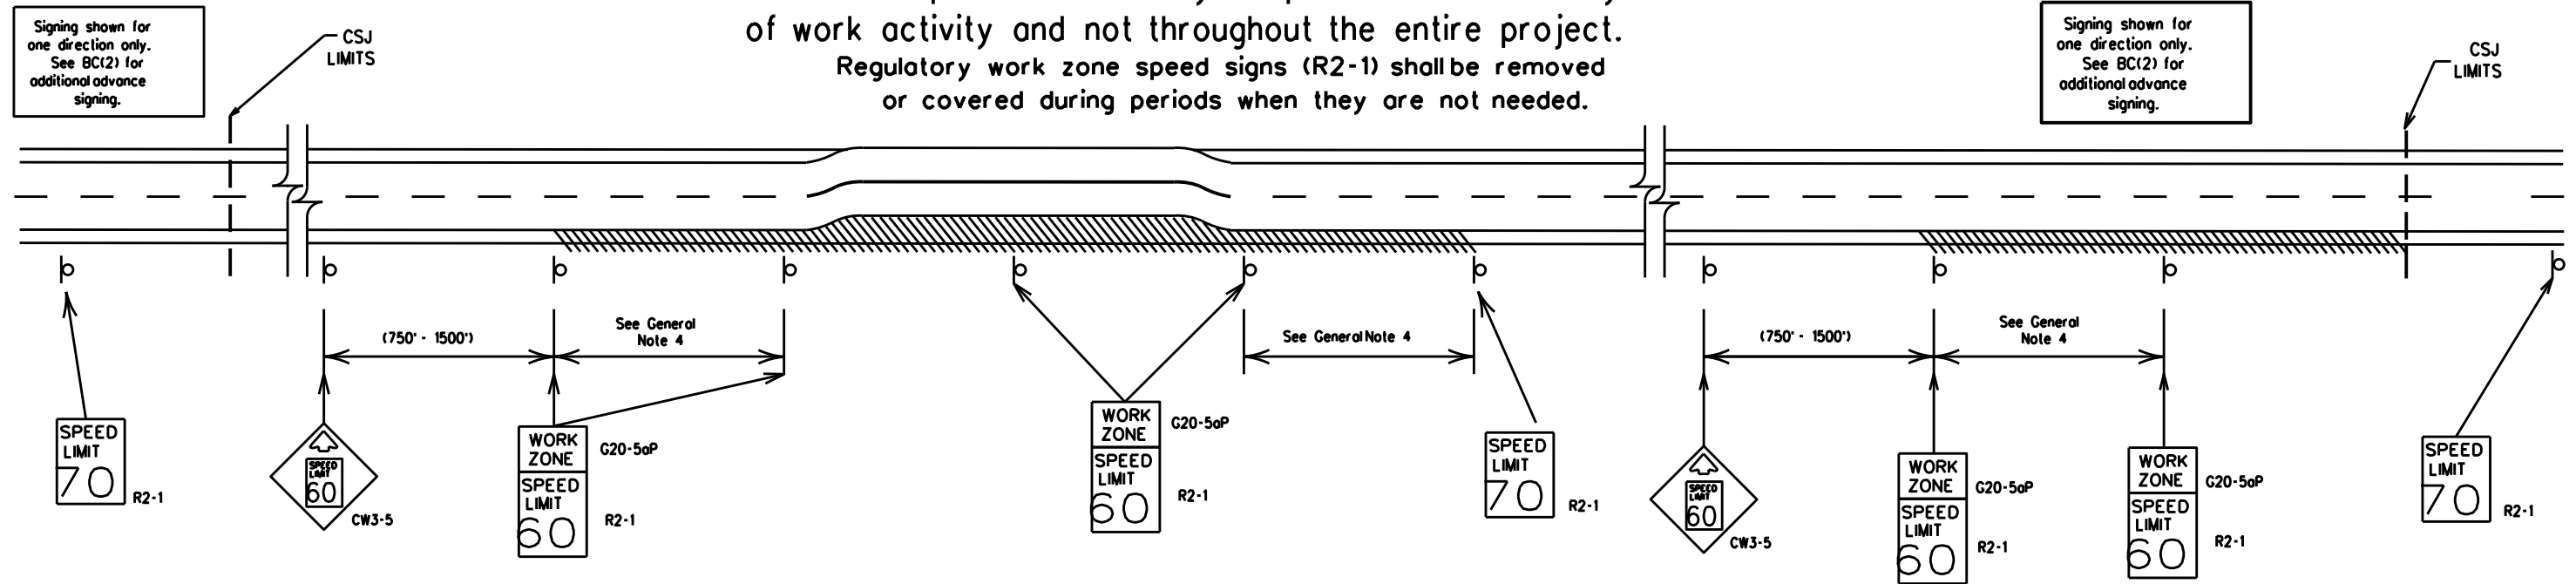

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
 - 40 mph and greater 0.2 to 2 miles
 - 35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Low enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form *1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units.


DATE: 8/1/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86) BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT BC(3)-21.dgn

SHEET 3 OF 12

		Traffic Safety Division Standard	
<h2>BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT</h2>			
<h3>BC(3)-21</h3>			
FILE:	bc-21.dgn	DN: TxDOT	CK: TxDOT
© TxDOT	November 2002	CONT	SECT
REVISIONS	01050223, ETC	JOB	HIGHWAY
9-07	8-14	DIST	CHS
7-13	5-21	COUNTY	HALL
		SHEET NO.	15

DATE: 8/1/2023
 TIME: 8:52:03 PM
 FILE: T:\CHSD\PROJECTS\HALL\105-02-023 (SH 86) \Rehab\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

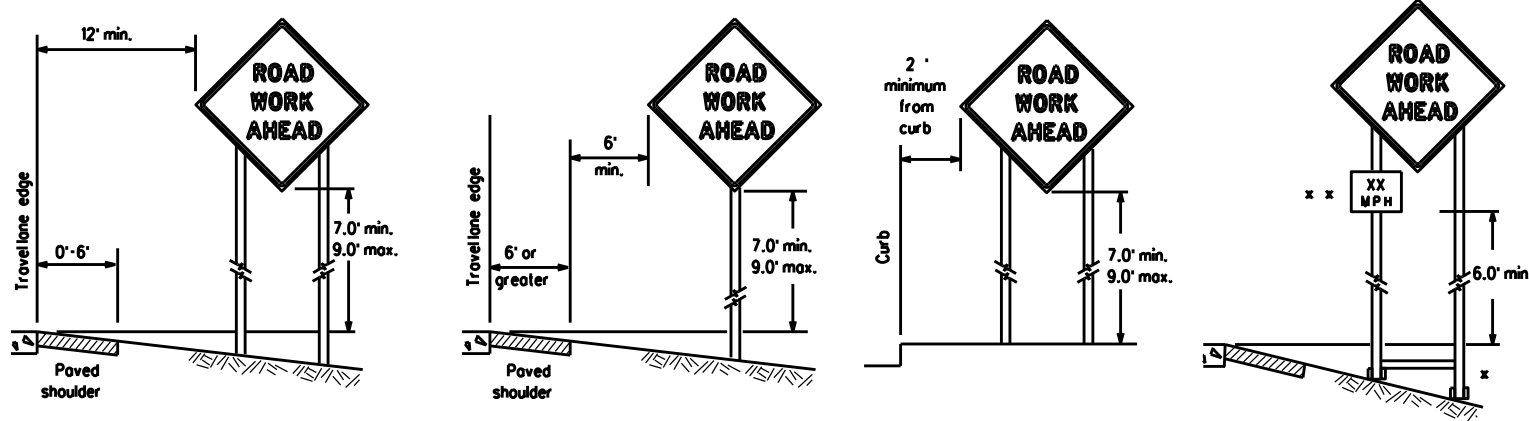

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

* * When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

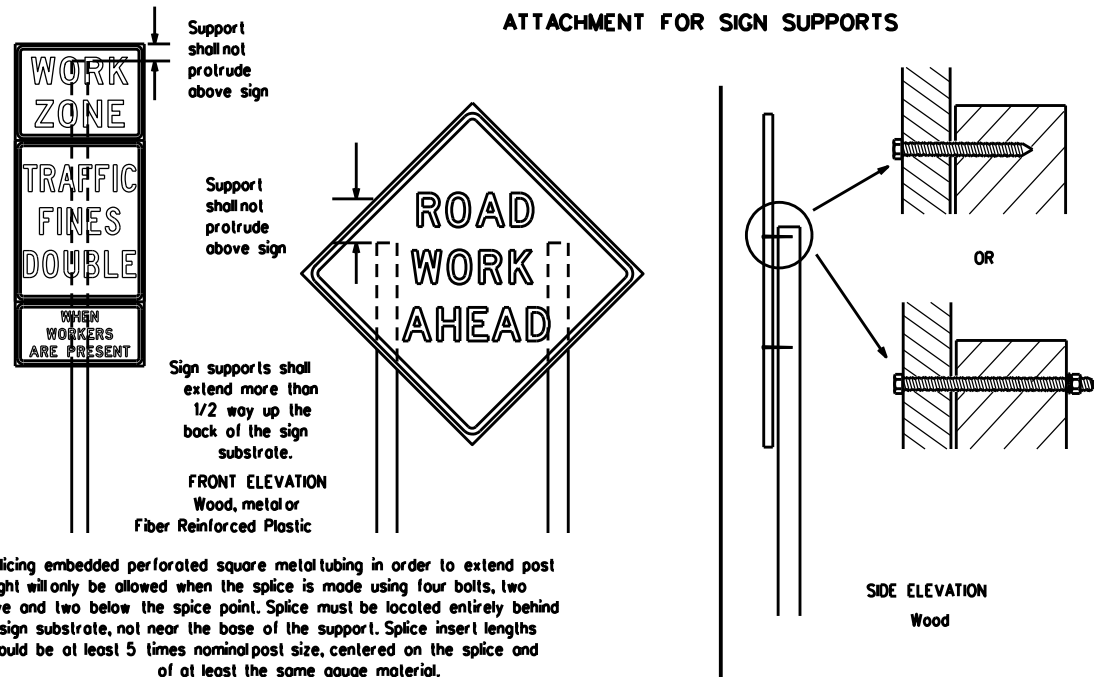


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nails shall NOT be allowed. Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflectorized when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

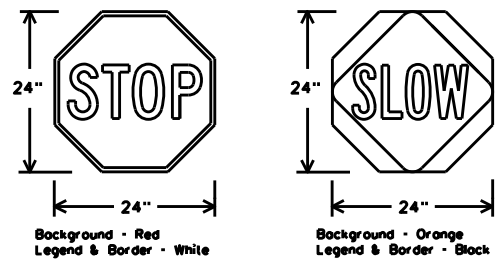

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{TL} OR C _{TL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCO list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCO) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCO lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B or Type C, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCO list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12





BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC(4)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223, ETC, SH 70/86			
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	CHS	HALL	16	

DATE: 8/1/2023
 TIME: 8:53:22 PM
 FILE: T:\CHSD\PROJECTS\HAL\0105-02-023 (SH 86 RENDY)\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn

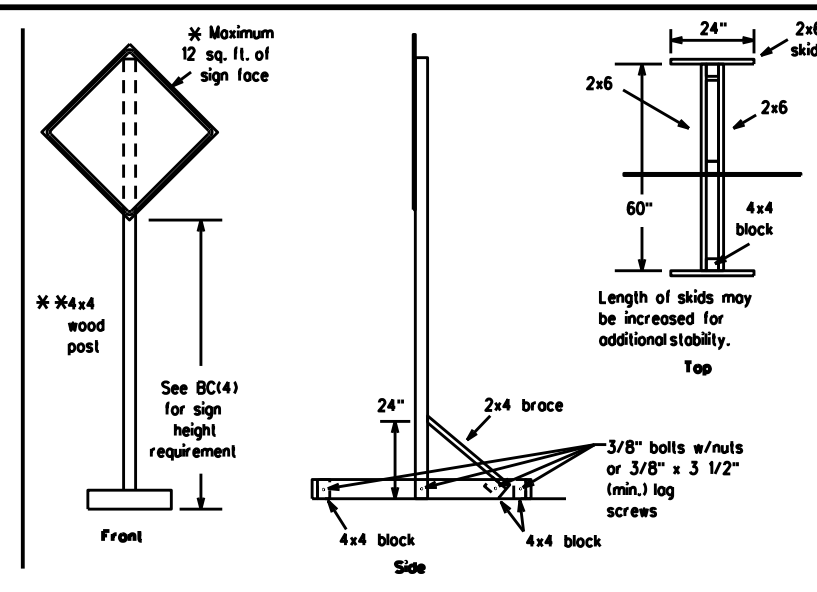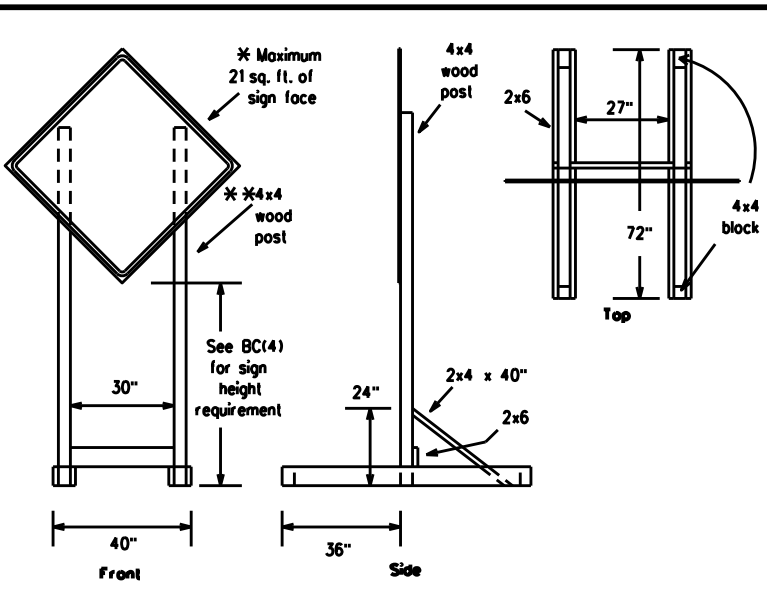



SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

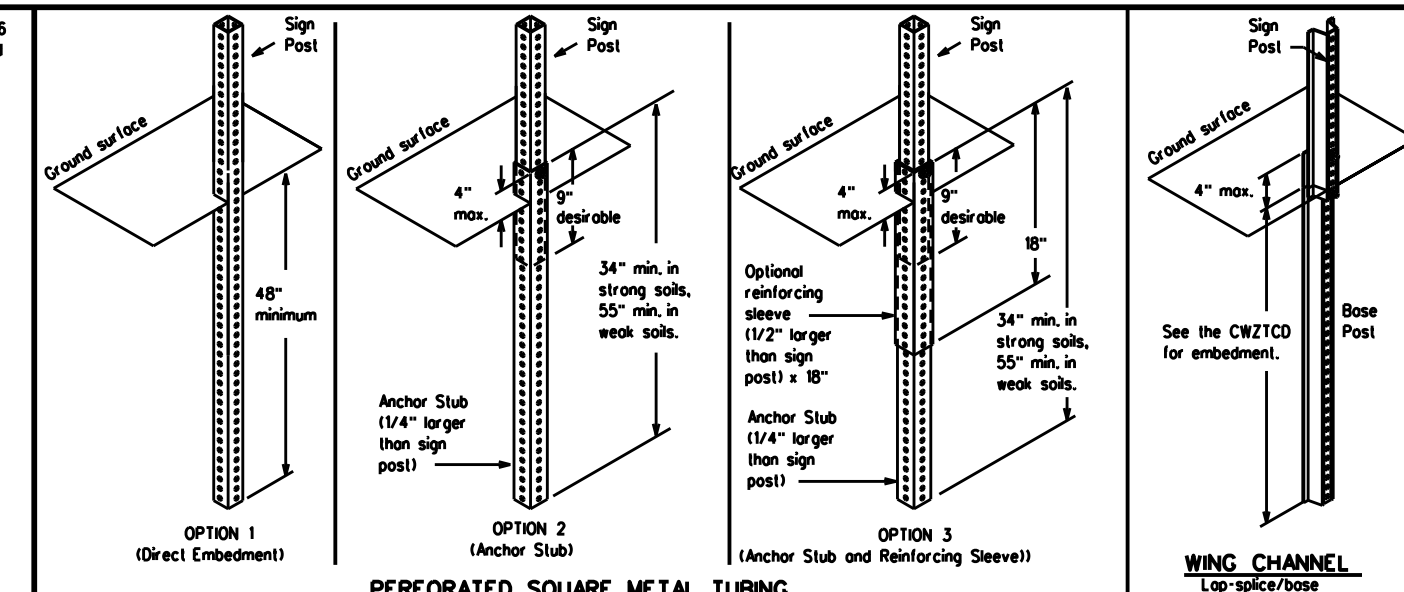


GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

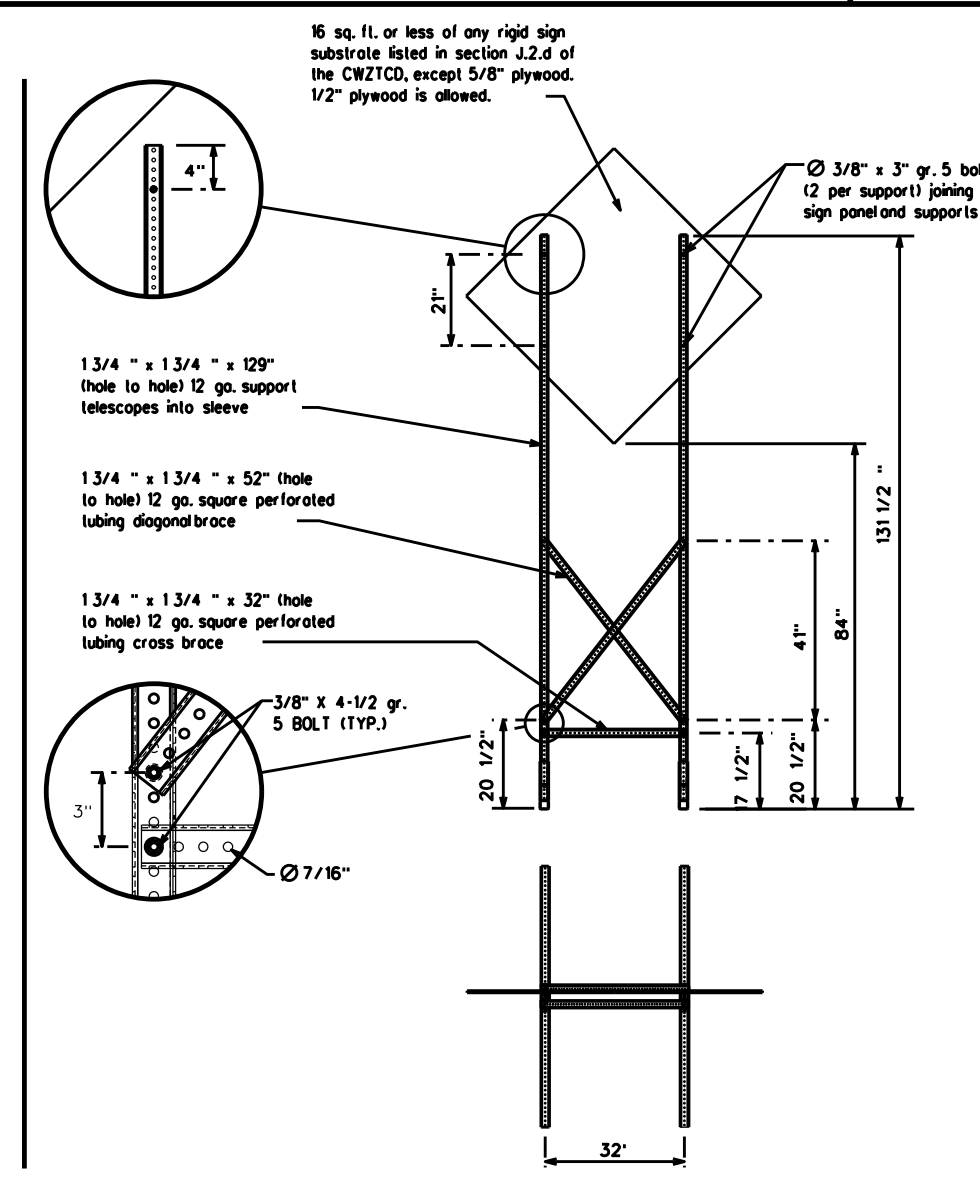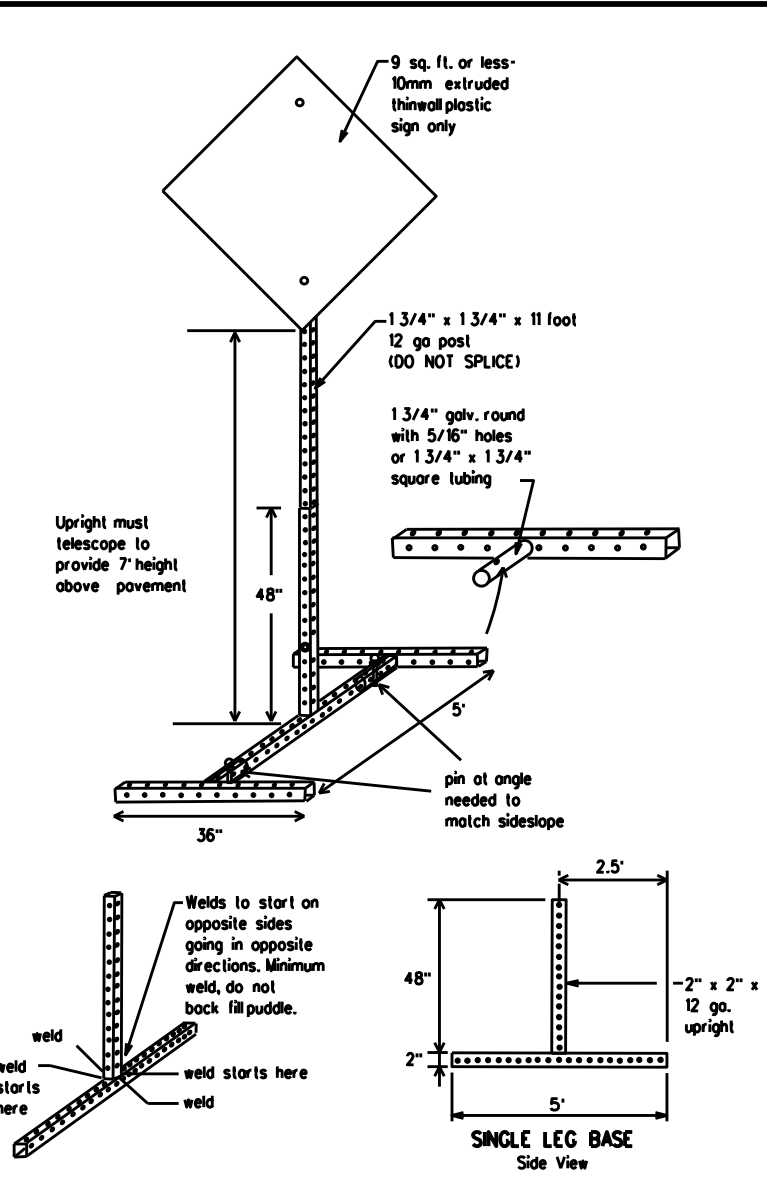

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

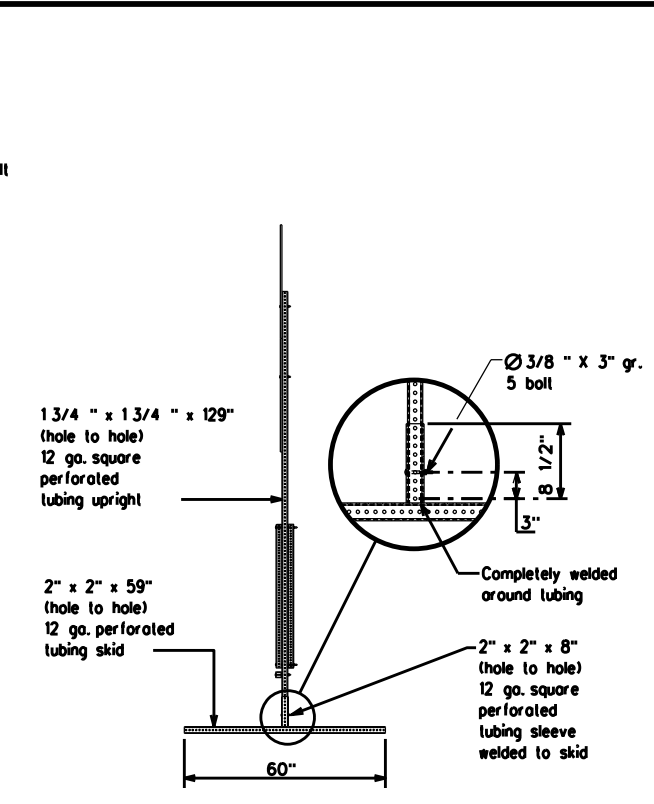

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" log screws must be used on every joint for final connection.
2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- * See BC(4) for definition of "Work Duration."
- ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- ☐ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223.ETC.SH 70/86			
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	CHS	HALL	17	

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase must be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXXX BLVD CLOSED

Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI
ROADWORK XXX FT
FLAGGER XXXX FT
RIGHT LN NARROWS XXXX FT
MERGING TRAFFIC XXXX FT
LOOSE GRAVEL XXXX FT
DETOUR X MILE
ROADWORK PAST SH XXXX
BUMP XXXX FT
TRAFFIC SIGNAL XXXX FT
ROAD REPAIRS XXXX FT
LANE NARROWS XXXX FT
TWO-WAY TRAFFIC XX MILE
CONST TRAFFIC XXX FT
UNEVEN LANES XXXX FT
ROUGH ROAD XXXX FT
ROADWORK NEXT FRI-SUN
US XXX EXIT X MILES
LANES SHIFT

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE
FORM X LINES RIGHT
USE XXXXX RD EXIT
USE EXIT I-XX NORTH
USE I-XX E TO I-XX N
WATCH FOR TRUCKS
EXPECT DELAYS
END SHOULDER USE
WATCH FOR WORKERS

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXXX TO XXXXXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM- X PM
APR XX- XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM- XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS should be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and M, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flogger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound (route) N	
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound (route) E		Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound (route) S	
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHs
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound (route) W	
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation = IH-number, US-number, SH-number, FM-number

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of the information herein. SHEETS STANDARDS PROJECTS\HALL\0105-02-023 (SH 86) 8/1/2023 8:54:33 PM DATE: 8/1/2023 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86) 8/1/2023 8:54:33 PM




BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC(6)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223_ETC.SH 70/86			
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	CHS	HALL	18	


DATE: 8/1/2023
 FILE: T:\CHSD\DESIGN\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn
 8:56:08 PM
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

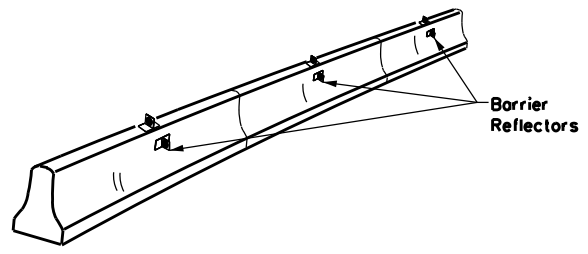

CONCRETE TRAFFIC BARRIER (CTB)


- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edge line being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

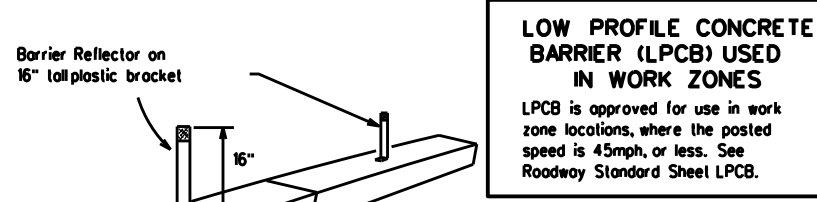

LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES
 LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Barrier Reflector on 16" tall plastic bracket
 Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

LOW PROFILE CONCRETE BARRIER (LPCB)

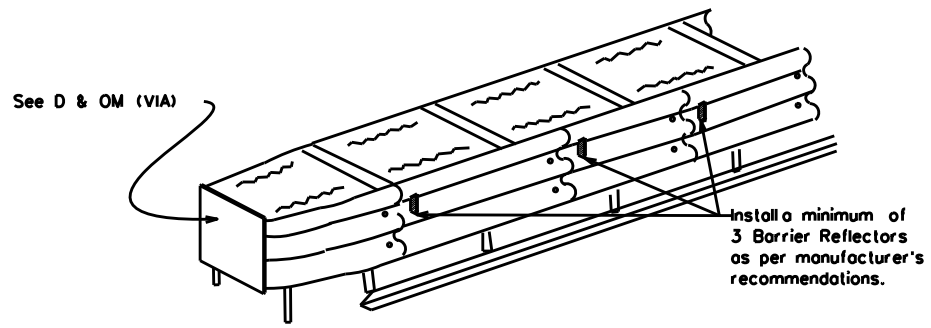


DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES
 End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B or C sheeting, meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.



Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS

- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.




Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

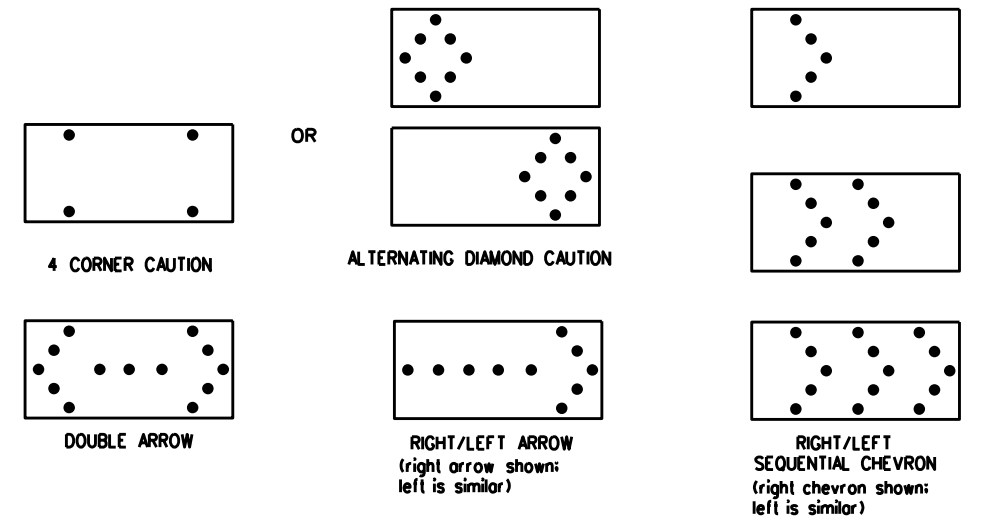

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be advanced anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC(7)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223, ETC, SH 70/86			
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	CHS	HALL	19	

DATE: 8/1/2023
 TIME: 8:57:24 PM
 FILE: T:\CHSD\PROJECTS\HALL\105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:




- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

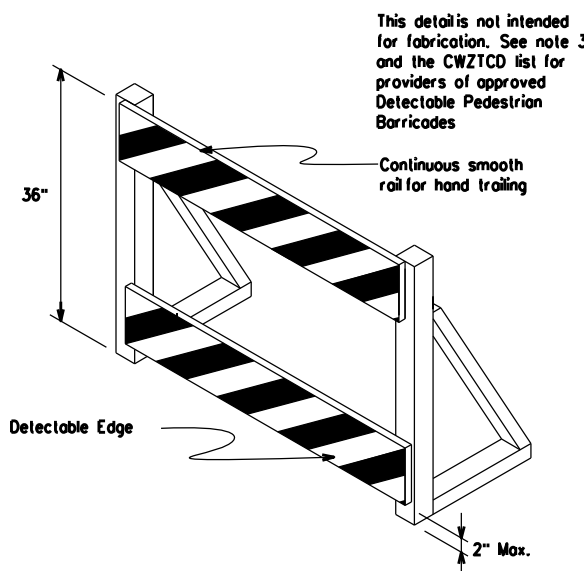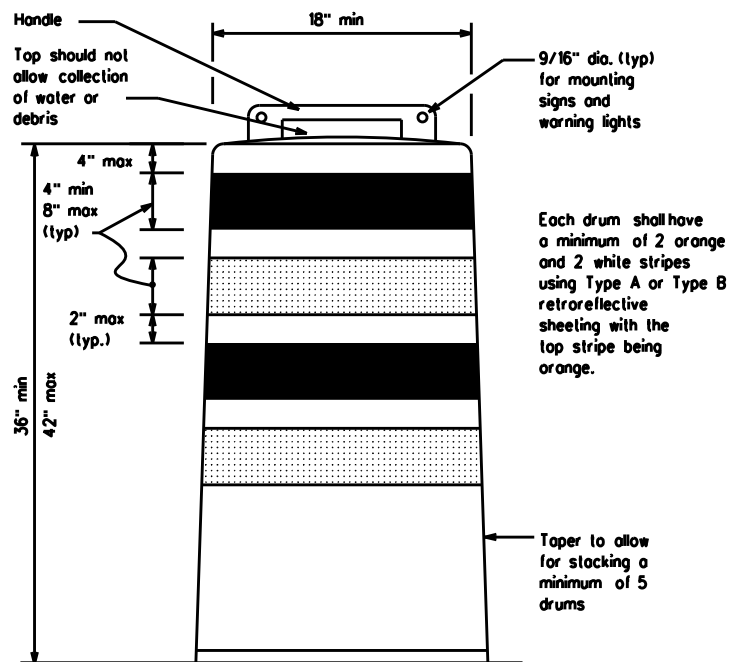


DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign
(Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel
mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B or Type C Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used of each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12





BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223, ETC, SH 70/86			
4-03 8-14	DIST	COUNTY	SHEET NO.	
9-07 5-21	CHS	HALL	20	
7-13				

DATE: 8/1/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn
 9:00:25 PM
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

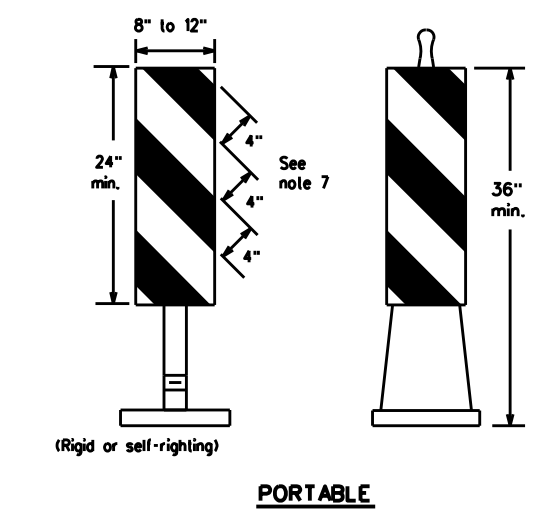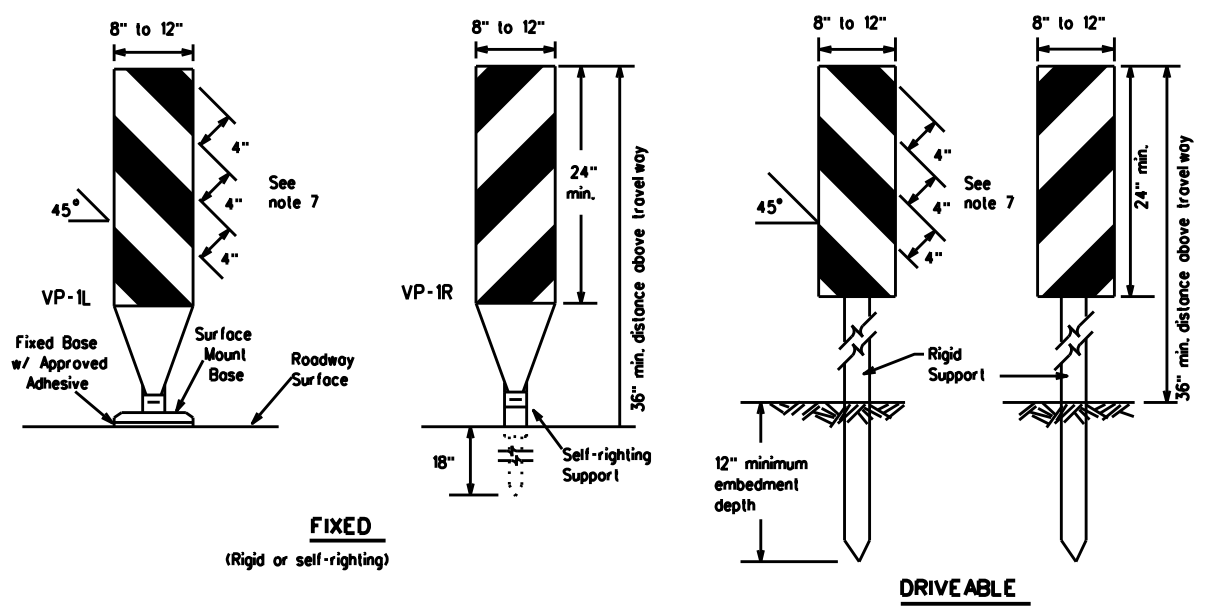


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panels is 36 inches or greater, a panel stripe of 6 inches shall be used.

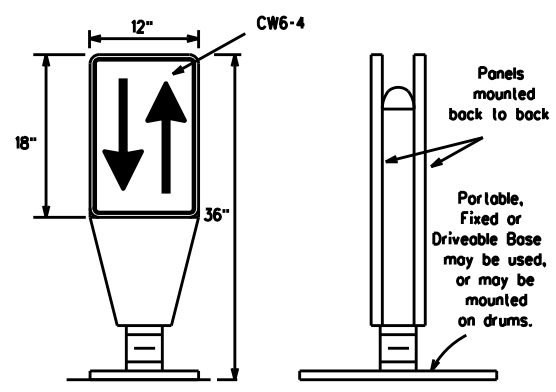


- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

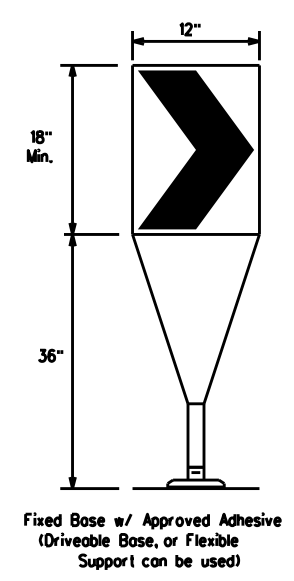

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

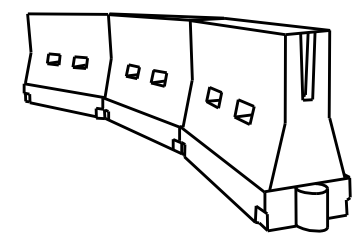

LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long cones and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES


- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70	700'	770'	840'	70'	140'	
75	750'	825'	900'	75'	150'	
80	800'	880'	960'	80'	160'	

x x Taper lengths have been rounded off.
 L=Length of Taper (FT.) W=Width of Offset (FT.)
 S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(9)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223, ETC, SH 70/86			
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	CHS	HALL	21	

DATE: 8/11/2023
 TIME: 9:02:42 PM
 FILE: T:\CHSD\DESIGN\PROJECTS\HAL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorporating results or damages resulting from its use.


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stocked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

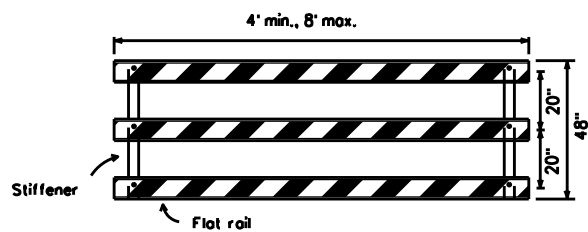


Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

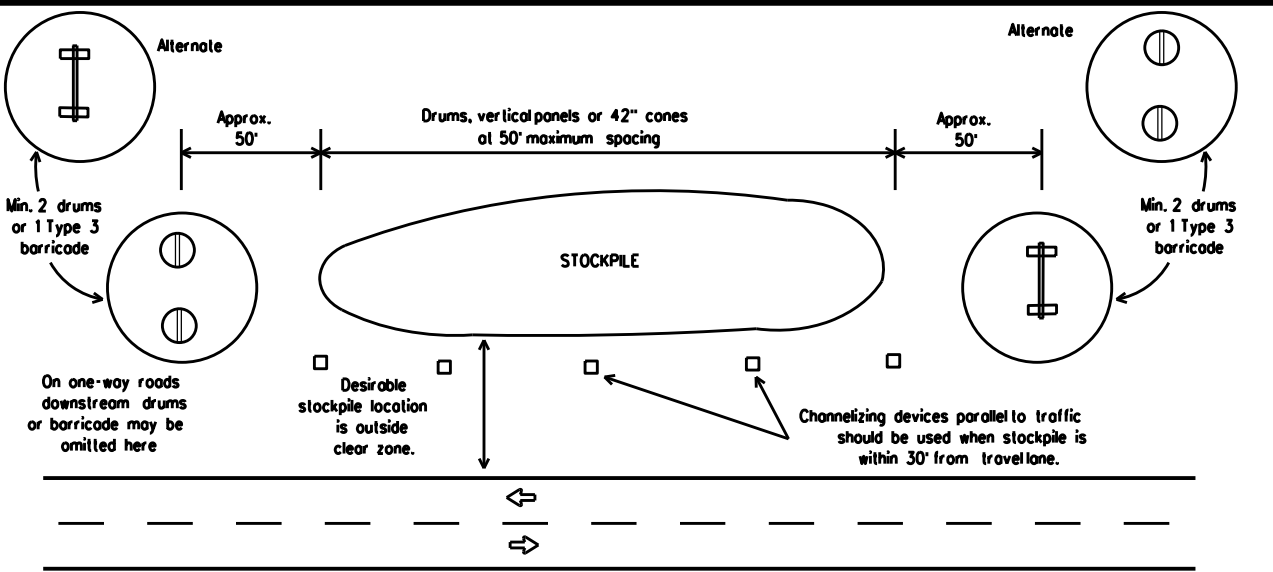


TRAFFIC CONTROL FOR MATERIAL STOCKPILES

Each roadway of a divided highway shall be barricaded in the same manner.

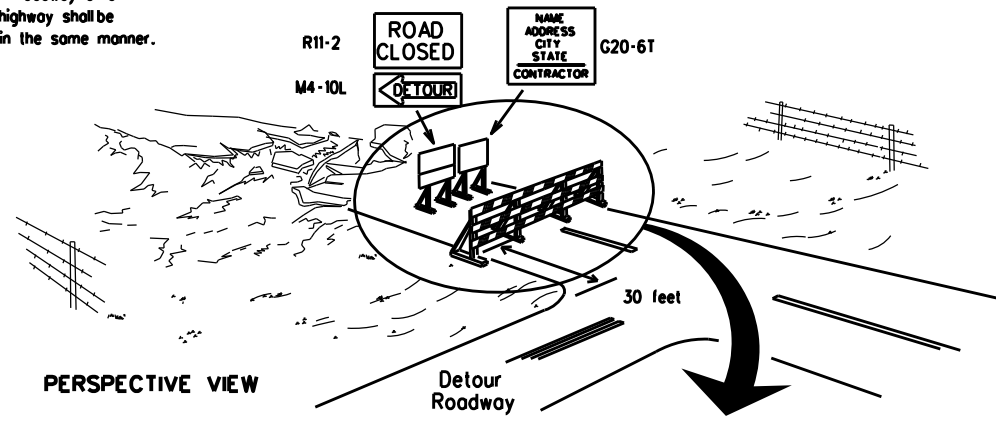

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

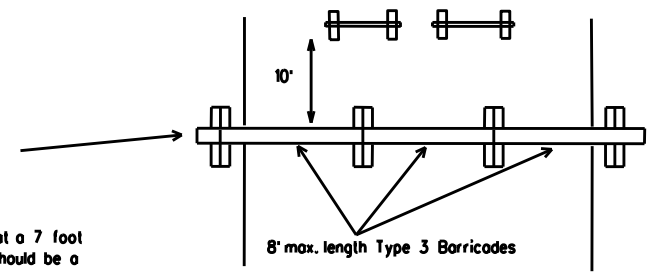

PLAN VIEW


1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

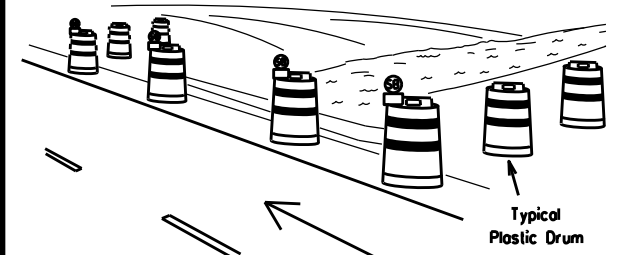

PERSPECTIVE VIEW

These drums are not required on one-way roadway

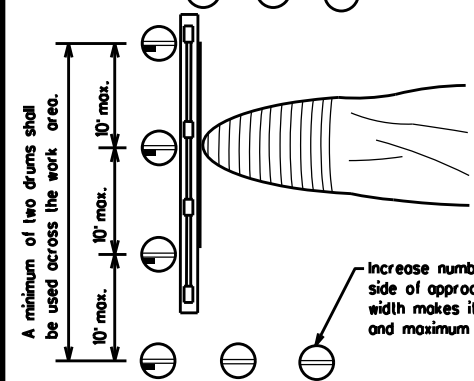


PLAN VIEW

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

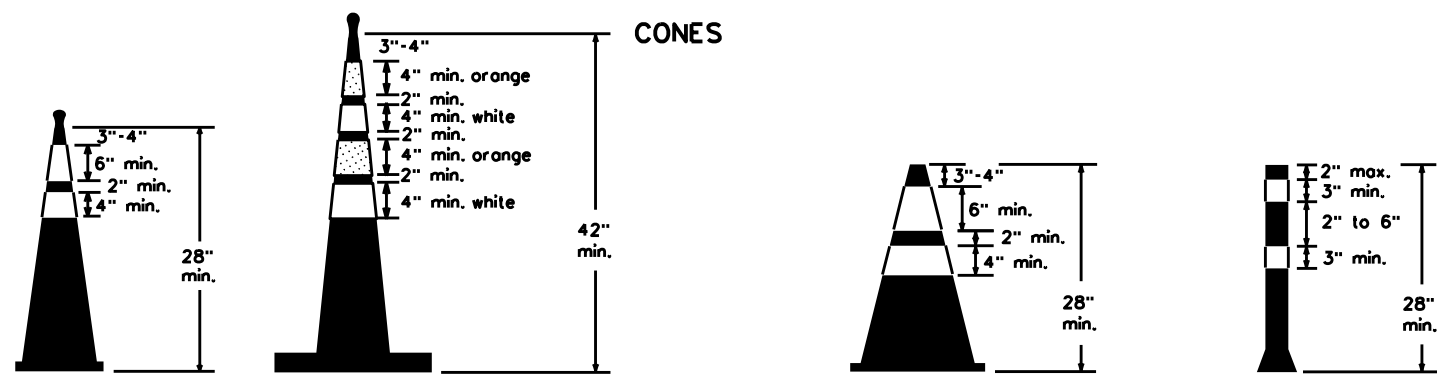

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined in BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223, ETC, SH 70/86			
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	CHS	HALL	22	

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Block-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

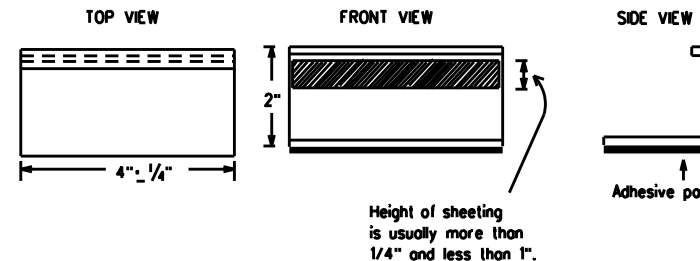

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS


- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12







BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS				
2-98	9-07	5-21		
1-02	7-13			
11-02	8-14			
			DIST	COUNTY
			CHS	HALL
				SHEET NO.
				23



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for inaccuracies or damages resulting from its use.
 DATE: 8/11/2023 9:04:26 PM
 FILE: T:\CHSDES\PROJECTS\HALL\10105-02-023 (SH 86) Renobyl\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn

PAVEMENT MARKING PATTERNS

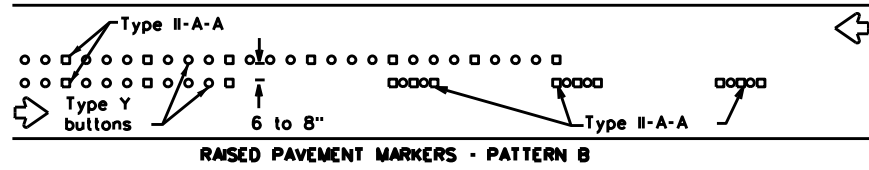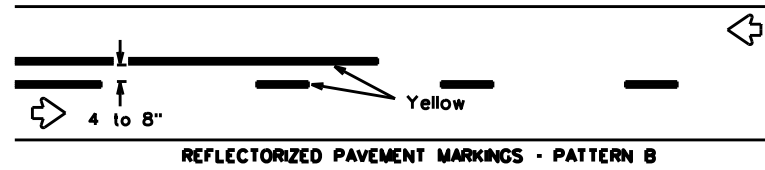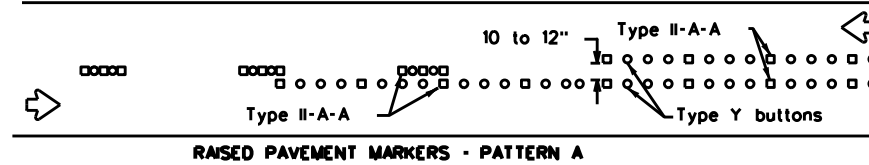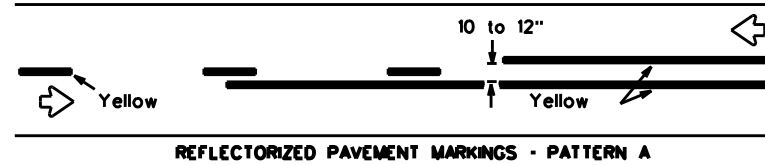



Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

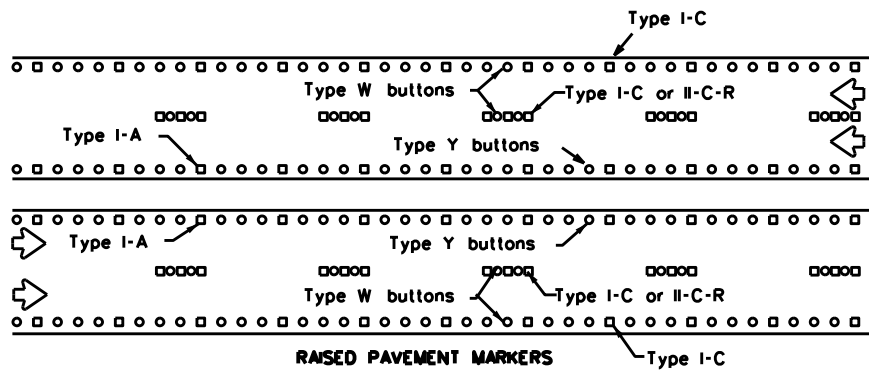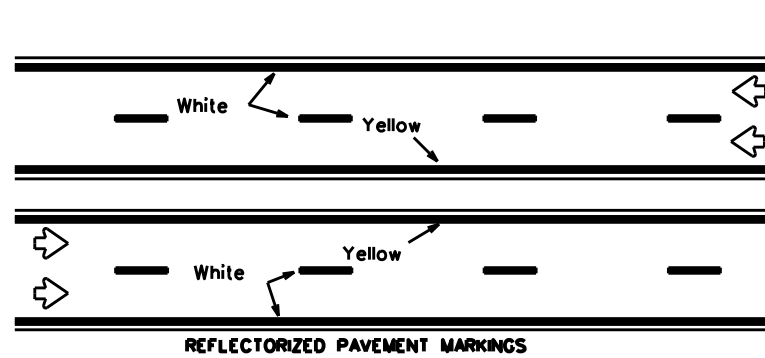



Prefabricated markings may be substituted for reflectorized pavement markings.

EDGE & LANE LINES FOR DIVIDED HIGHWAY

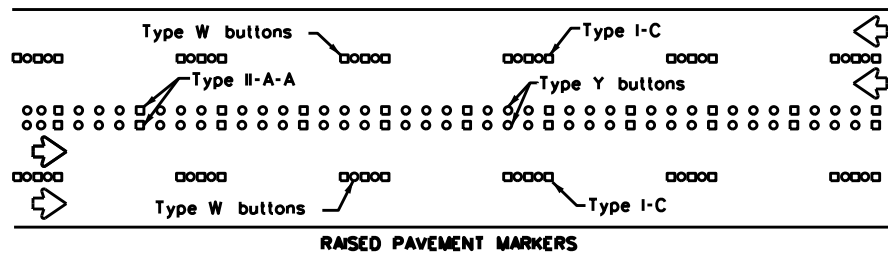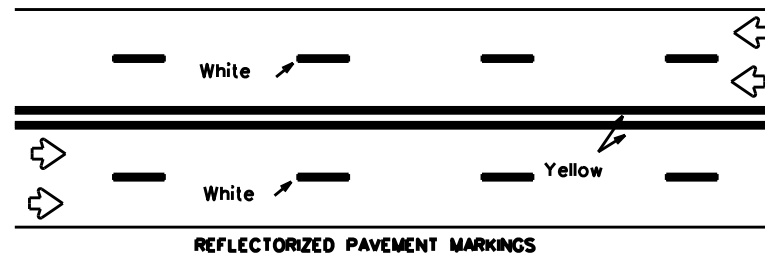

Prefabricated markings may be substituted for reflectorized pavement markings.


LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

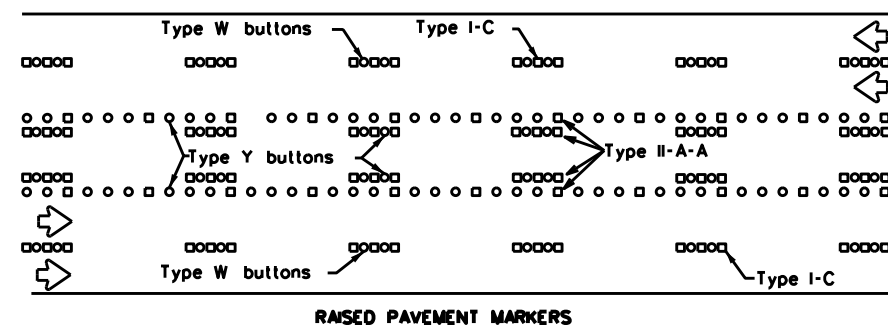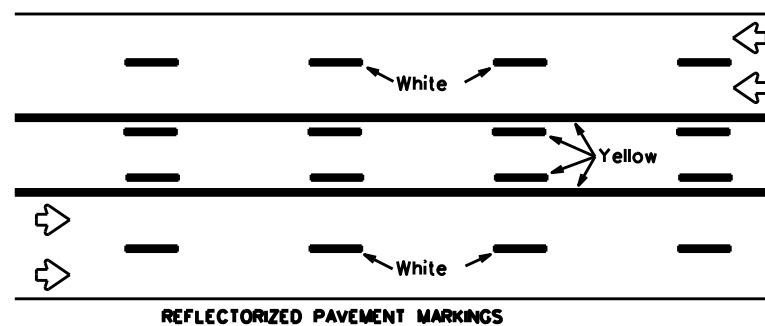



Prefabricated markings may be substituted for reflectorized pavement markings.

TWO-WAY LEFT TURN LANE



STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

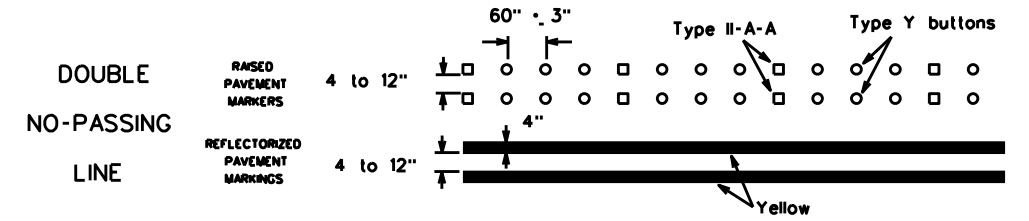

SOLID LINES

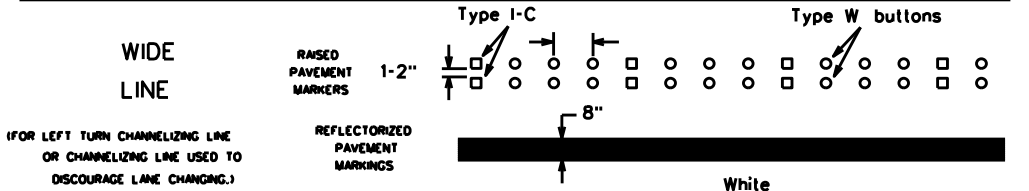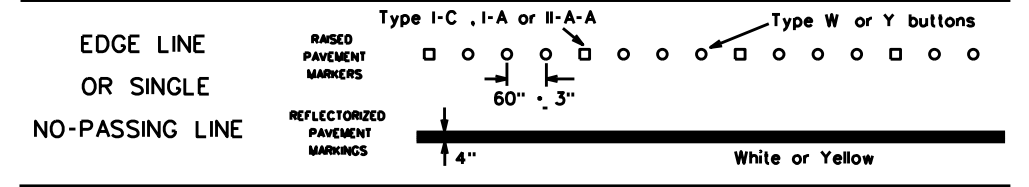


BROKEN LINES

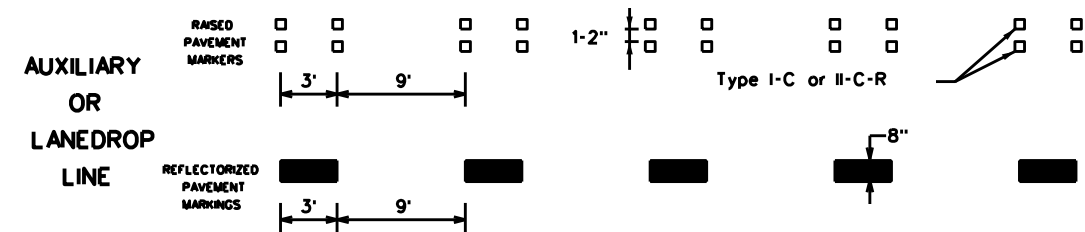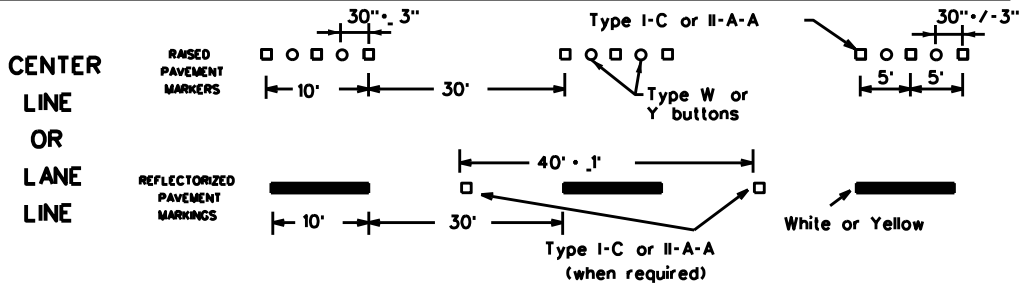

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

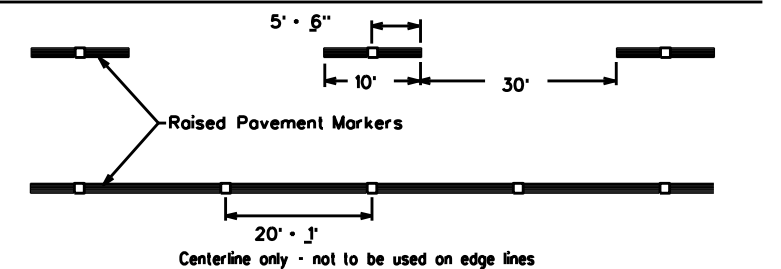

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21


Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050223, ETC, SH 70/86			
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	CHS	HALL	24	
11-02 8-14				

DATE: 8/1/2023 9:05:55 PM
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Traffic Control\bc-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for inaccuracies, omissions, or damages resulting from its use.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for any errors or omissions resulting from its use.

DATE: 8/1/2023 9:10:59 PM
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARD\TRAFFIC CONTROL PLAN\TCP(1-1)-18.dgn

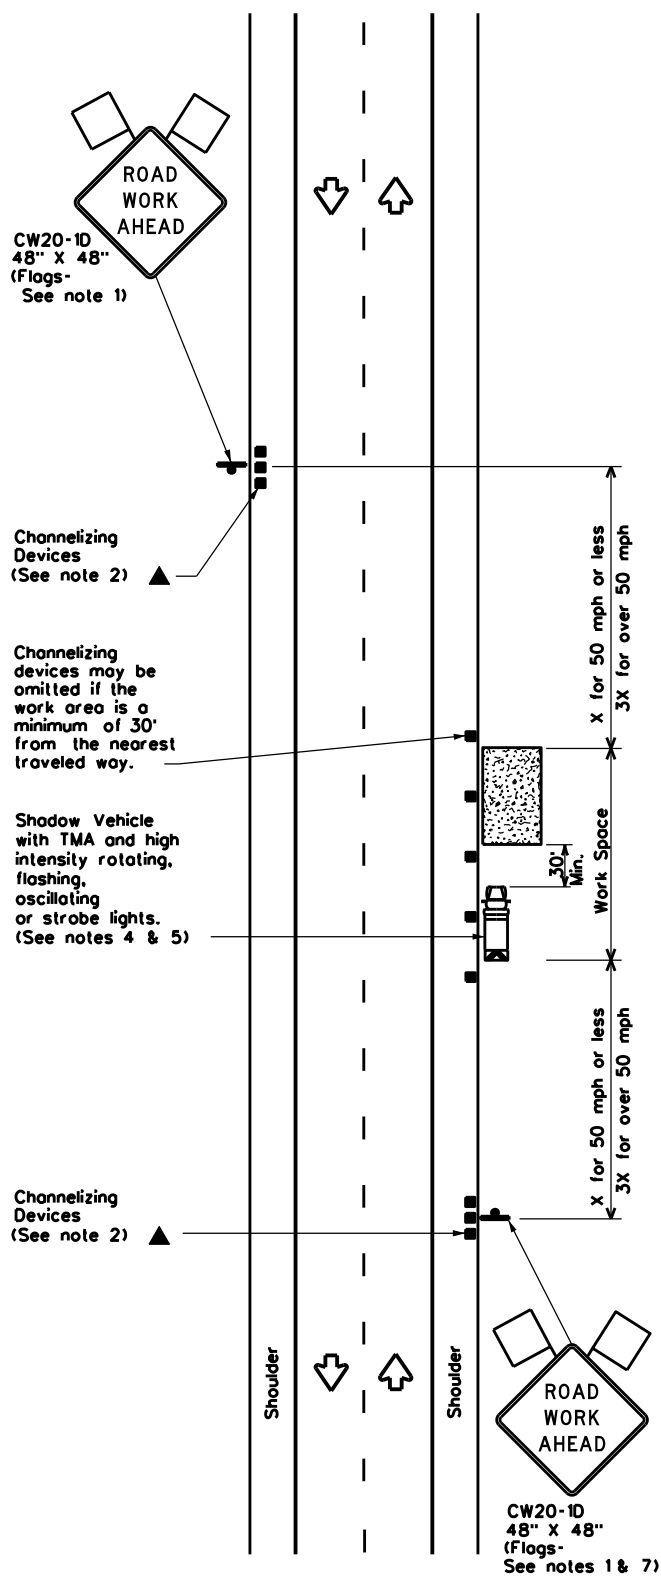


TCP (1-1a)

WORK SPACE NEAR SHOULDER
 Conventional Roads

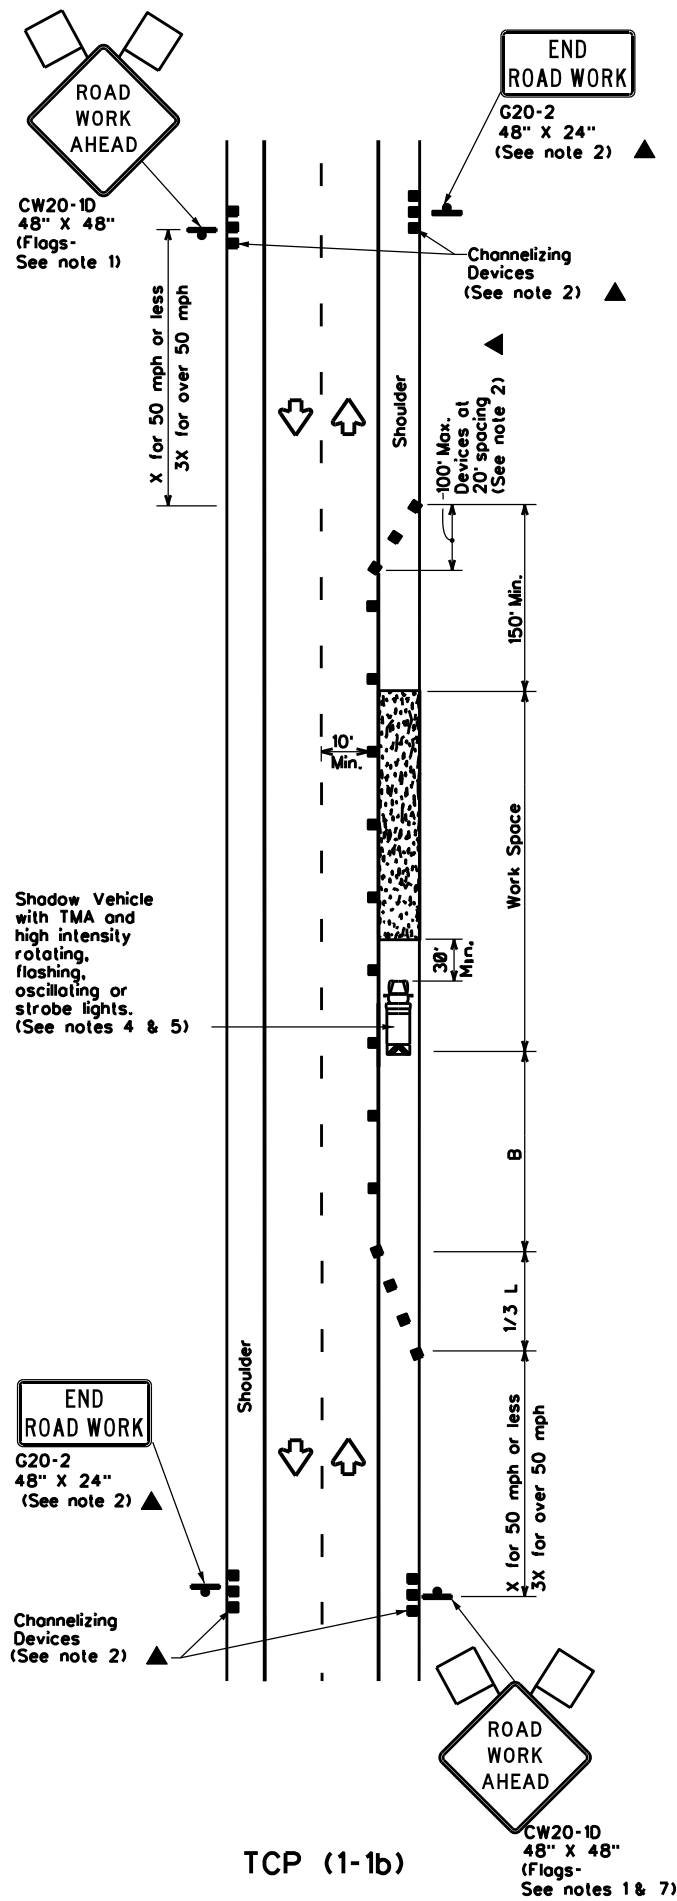

TCP (1-1b)

WORK SPACE ON SHOULDER
 Conventional Roads

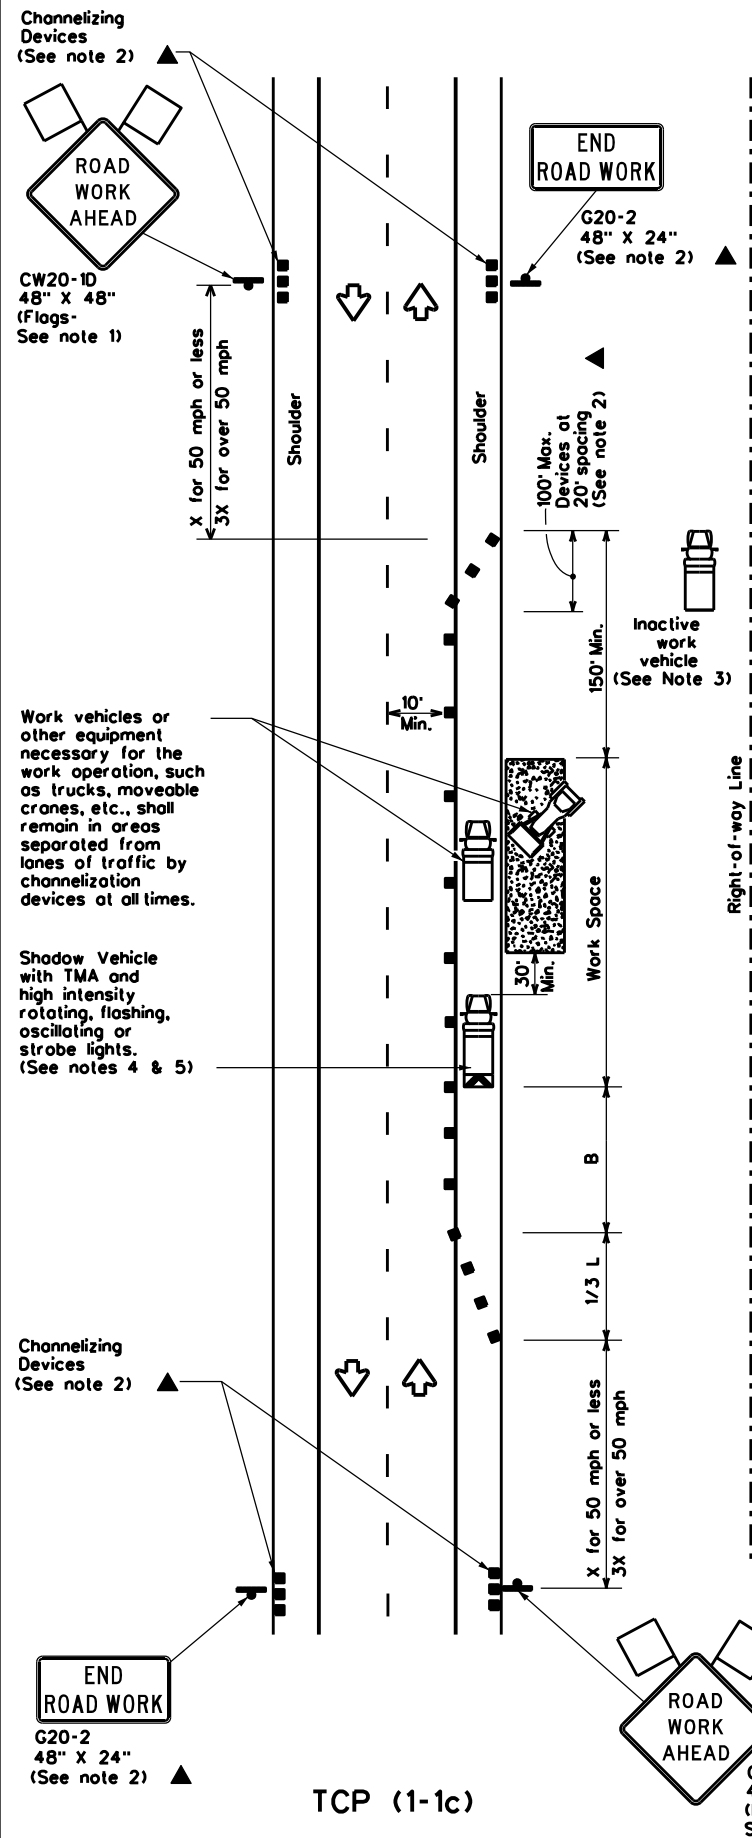

TCP (1-1c)

WORK VEHICLES ON SHOULDER
 Conventional Roads

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x =			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40	L = WS	265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75	750'	825'	900'	75'	150'	900'	540'	

x Conventional Roads Only
 x x Taper lengths have been rounded off.
 L-Length of Taper(FT) W-Width of Offset(FT) S-Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.





TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK

TCP(1-1)-18

FILE: tcp1-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105	02	023, ETC.	SH 70/86
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	CHS	HALL	25	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units or for any damages resulting from its use.

DATE: 8/1/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheet\Traffic Control\TCP(1-2)-18.dgn

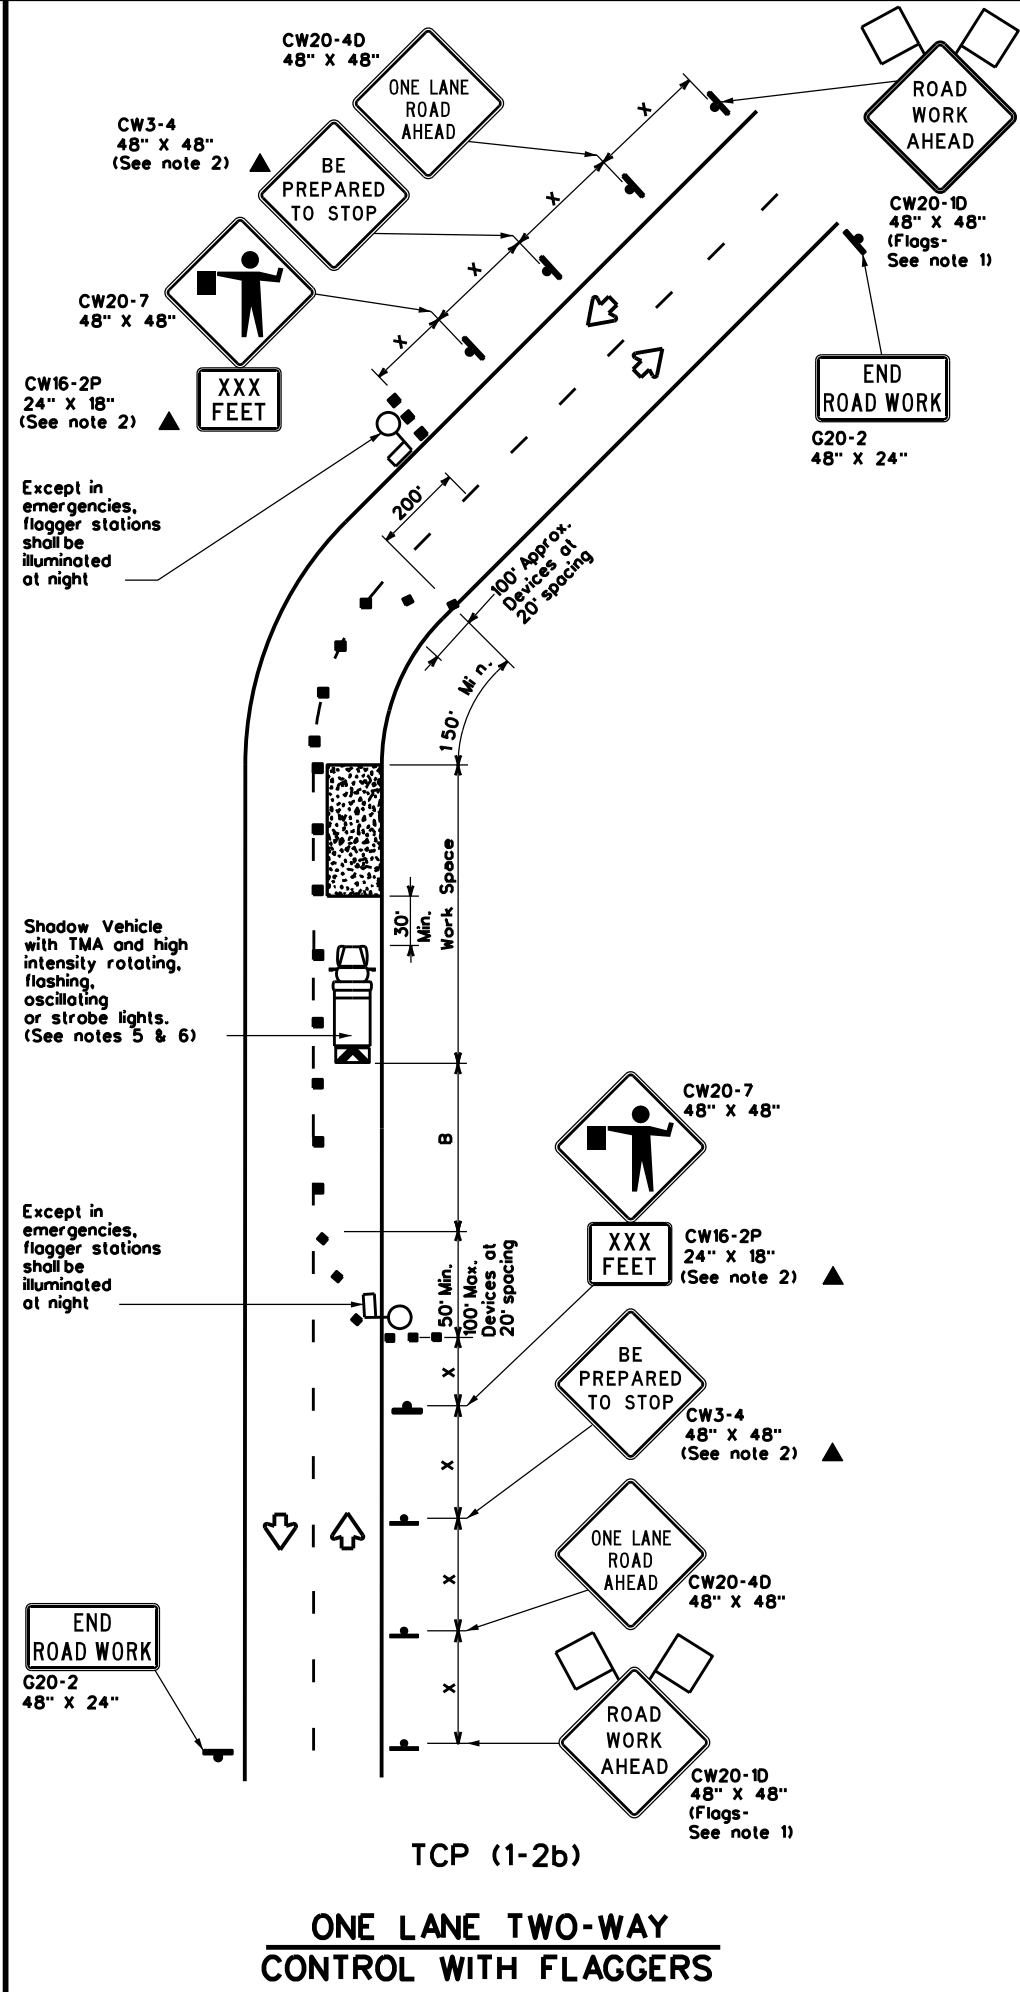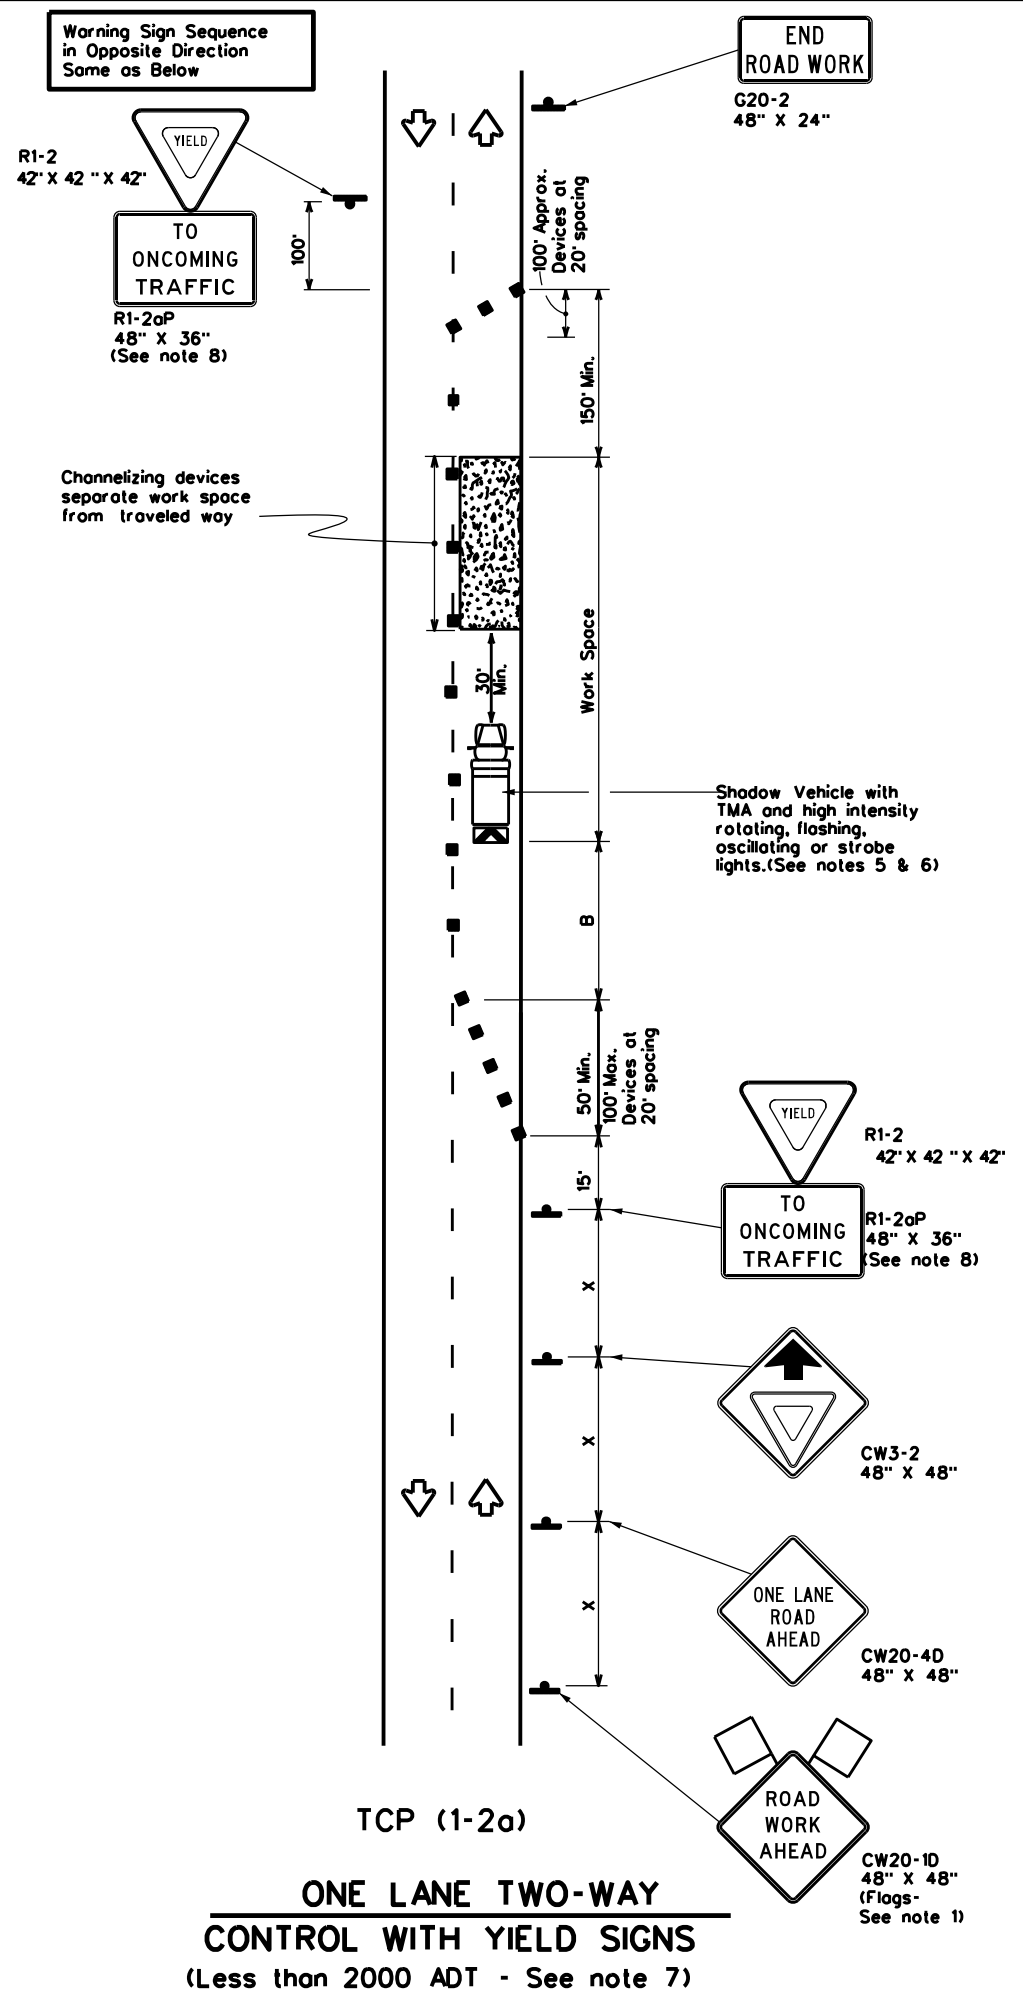

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flogger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

x Conventional Roads Only
 x x Taper lengths have been rounded off.
 L-Length of Taper (FT) W-Width of Offset (FT) S-Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		




GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4D "ONE LANE ROAD AHEAD" sign, but proper sign spacing shall be maintained.
 - Sign spacing may be increased or an additional CW20-1D "ROAD WORK AHEAD" sign may be used if advance warning ahead of the flagger or R1-2 "YIELD" sign is less than 1500 feet.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- TCP (1-2a)**
- R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work spaces should be no longer than one half city block. In rural areas on roadways with less than 2000 ADT, work spaces should be no longer than 400 feet.
 - R1-2 "YIELD" sign with R1-2oP "TO ONCOMING TRAFFIC" plaque shall be placed on a support at a 7 foot minimum mounting height.
- TCP (1-2b)**
- Flaggers should use two-way radios or other methods of communication to control traffic.
 - Length of work space should be based on the ability of flaggers to communicate.
 - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
 - Channelizing devices on the center-line may be omitted when a pilot car is leading traffic and approved by the Engineer.
 - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

		Traffic Operations Division Standard	
TRAFFIC CONTROL PLAN ONE-LANE TWO-WAY TRAFFIC CONTROL			
TCP(1-2)-18			
FILE:	tcp1-2-18.dgn	DN:	CK:
© TxDOT	December 1985	CON:	SECT:
REVISIONS 4-90 4-98 2-94 2-12 1-97 2-18		JOB HIGHWAY 010502023, ETC SH 70/86	
DIST COUNTY CHS HALL		SHEET NO. 26	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units or for any damages resulting from its use.

DATE: 8/1/2023
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheet\Standard\RD\SHR\186\186.dwg

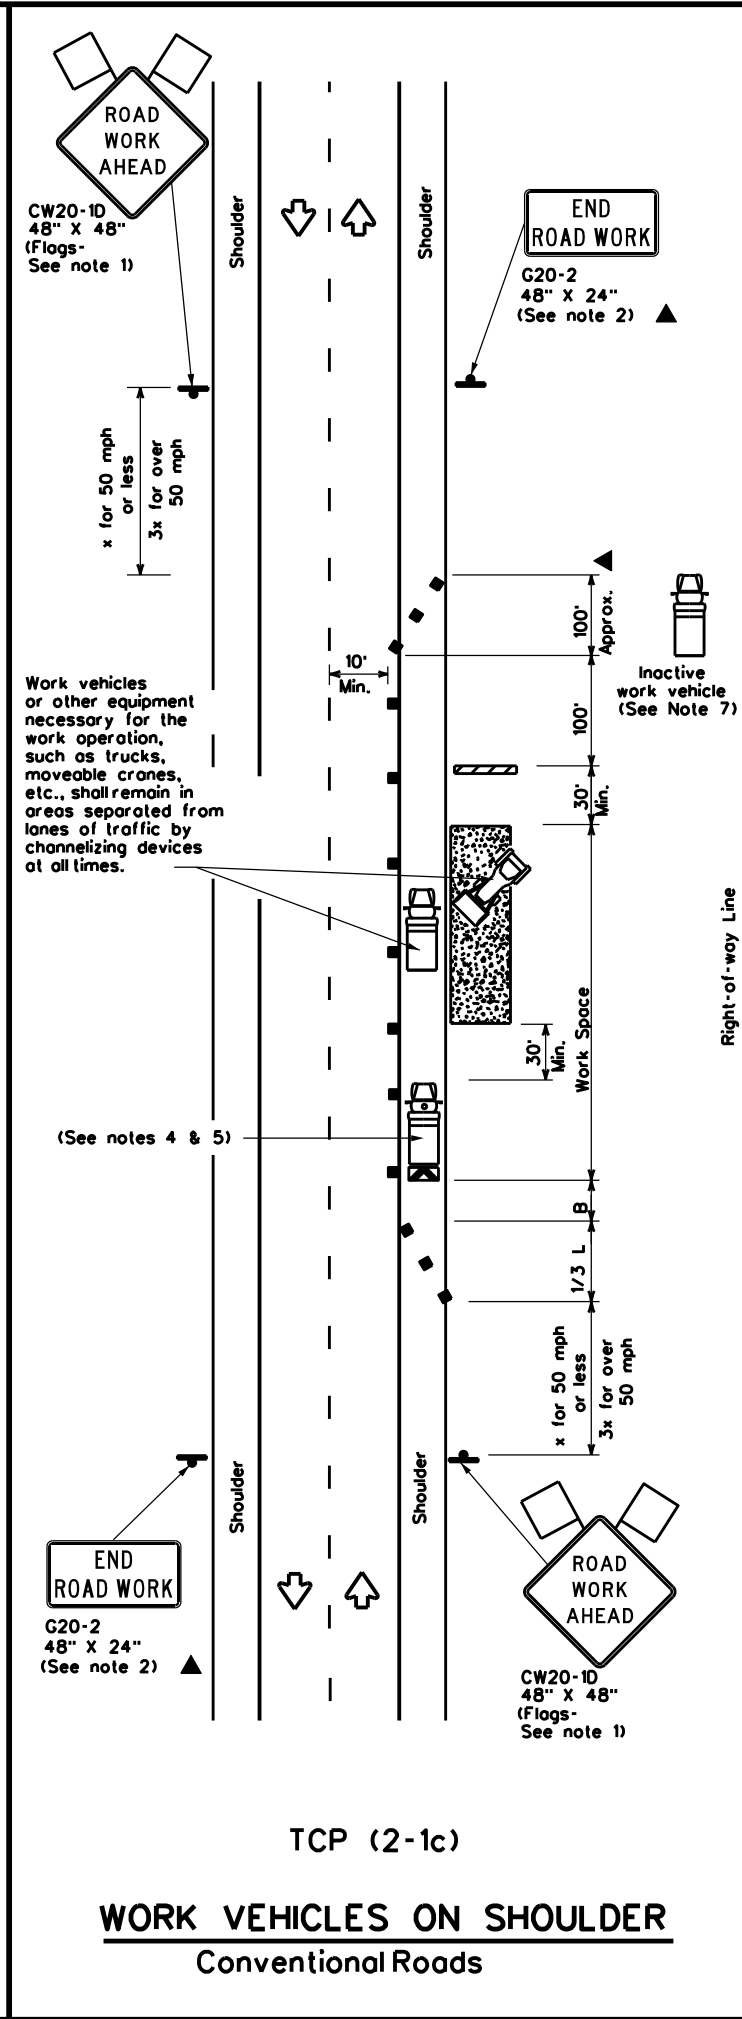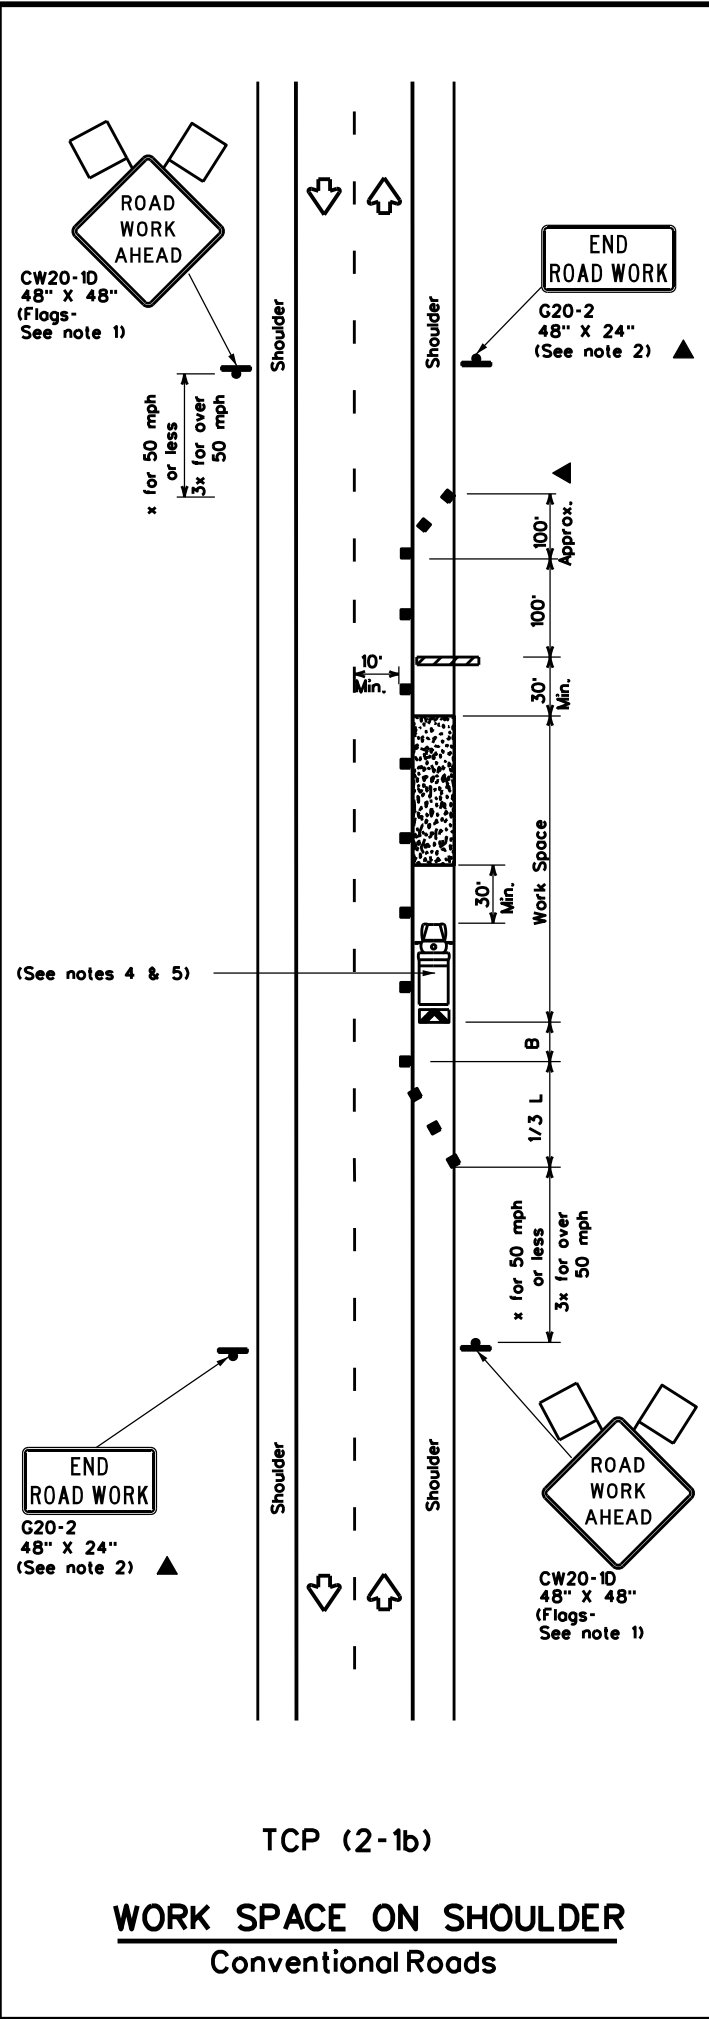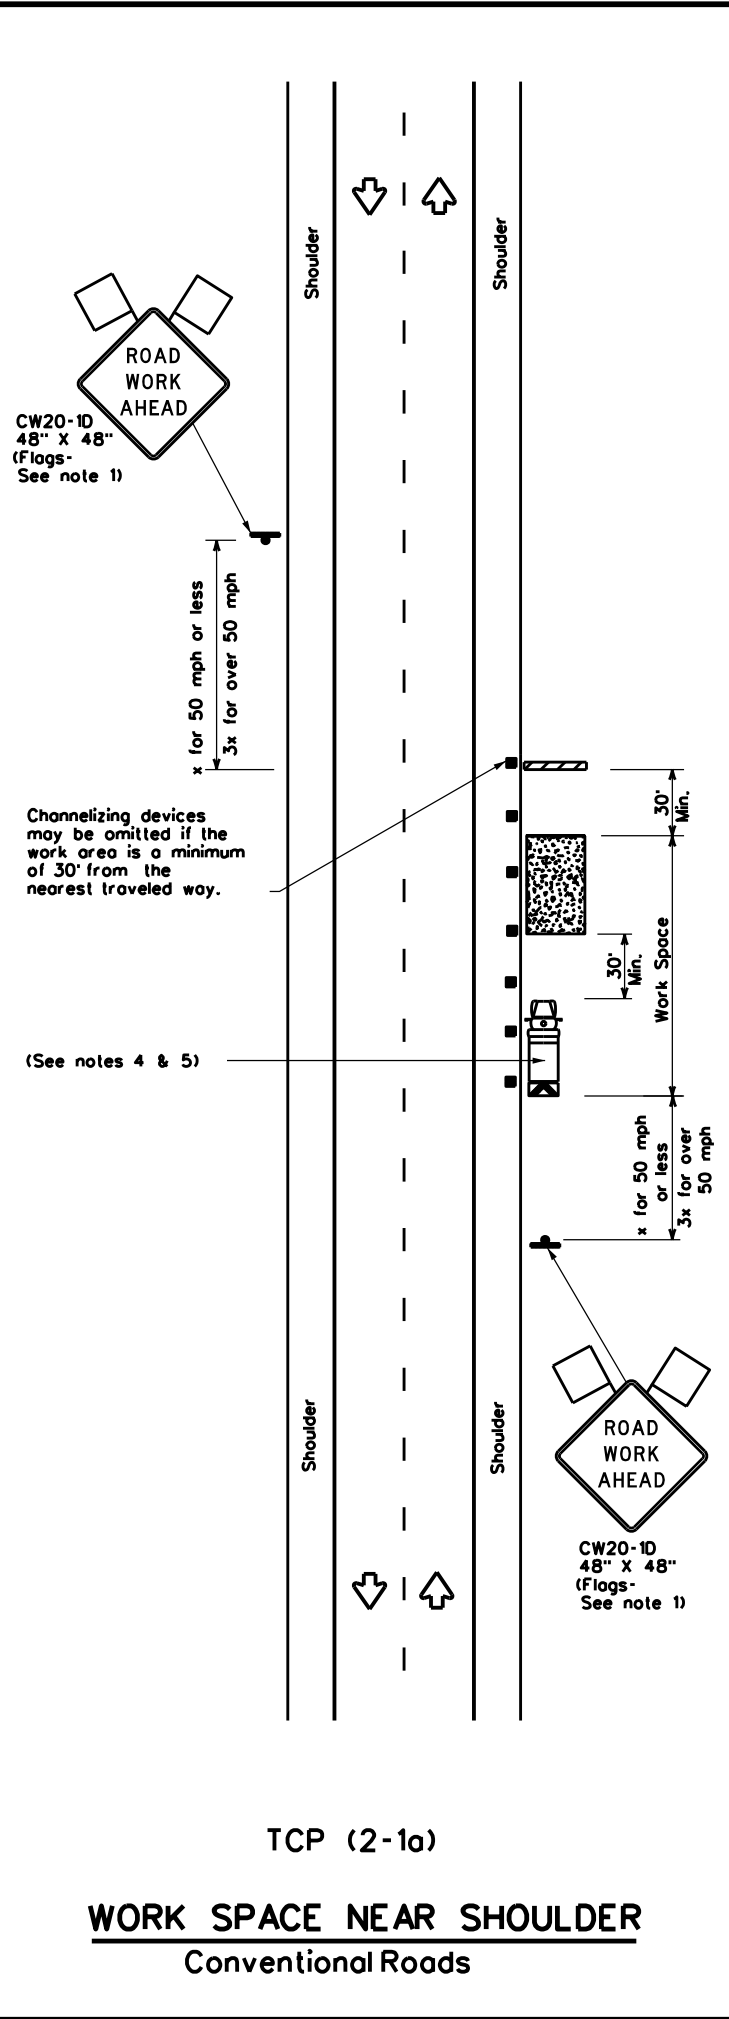

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40	L = WS	265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50	L = WS	500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60	L = WS	600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	L = WS	700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the plans, or for routine maintenance work, when approved by the Engineer.
 - Stockpiled material should be placed a minimum of 30 feet from nearest traveled way.
 - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.


Texas Department of Transportation
 Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK


TCP(2-1)-18

FILE: tcp2-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	010502023, ETC SH 70/86			
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	CHS	HALL	27	
1-97 2-18				

DATE: 8/1/2023
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheet\T-101\T-101.dwg
 9:30:46 PM
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from its original source to any other format or for any damages resulting from its use.

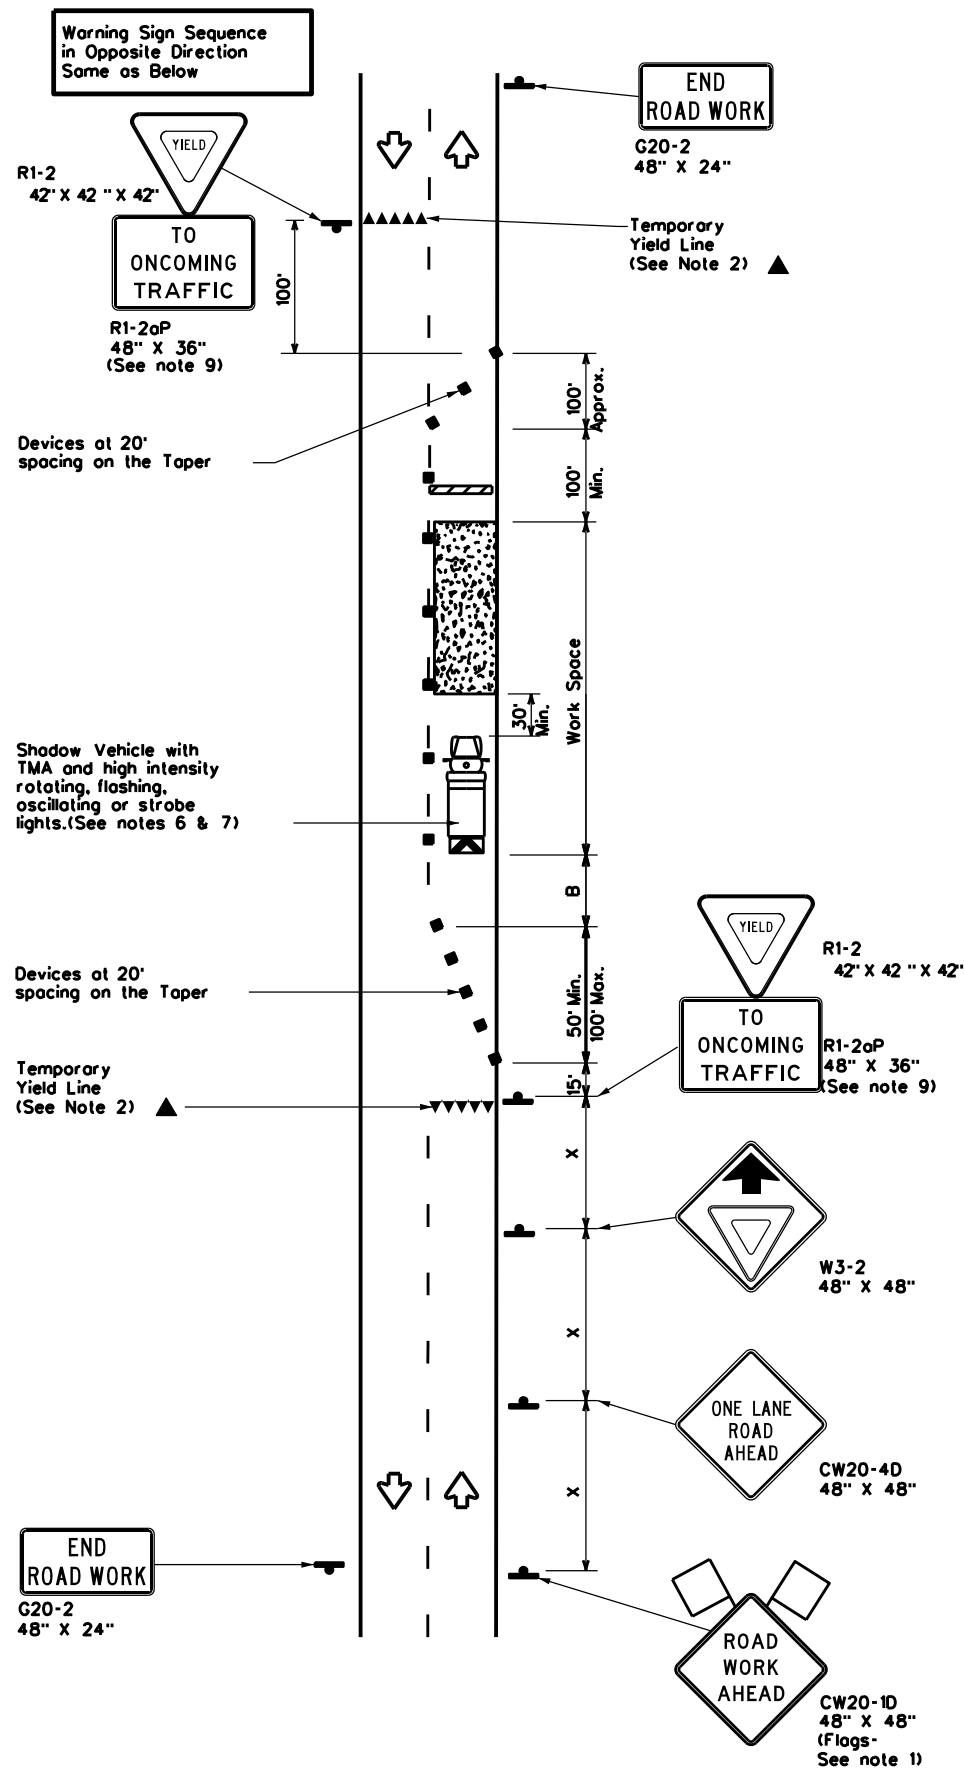

TCP (2-2a)
2-LANE ROADWAY WITHOUT PAVED SHOULDERS
ONE LANE TWO-WAY
CONTROL WITH YIELD SIGNS
 (Less than 2000 ADT - See Note 9)

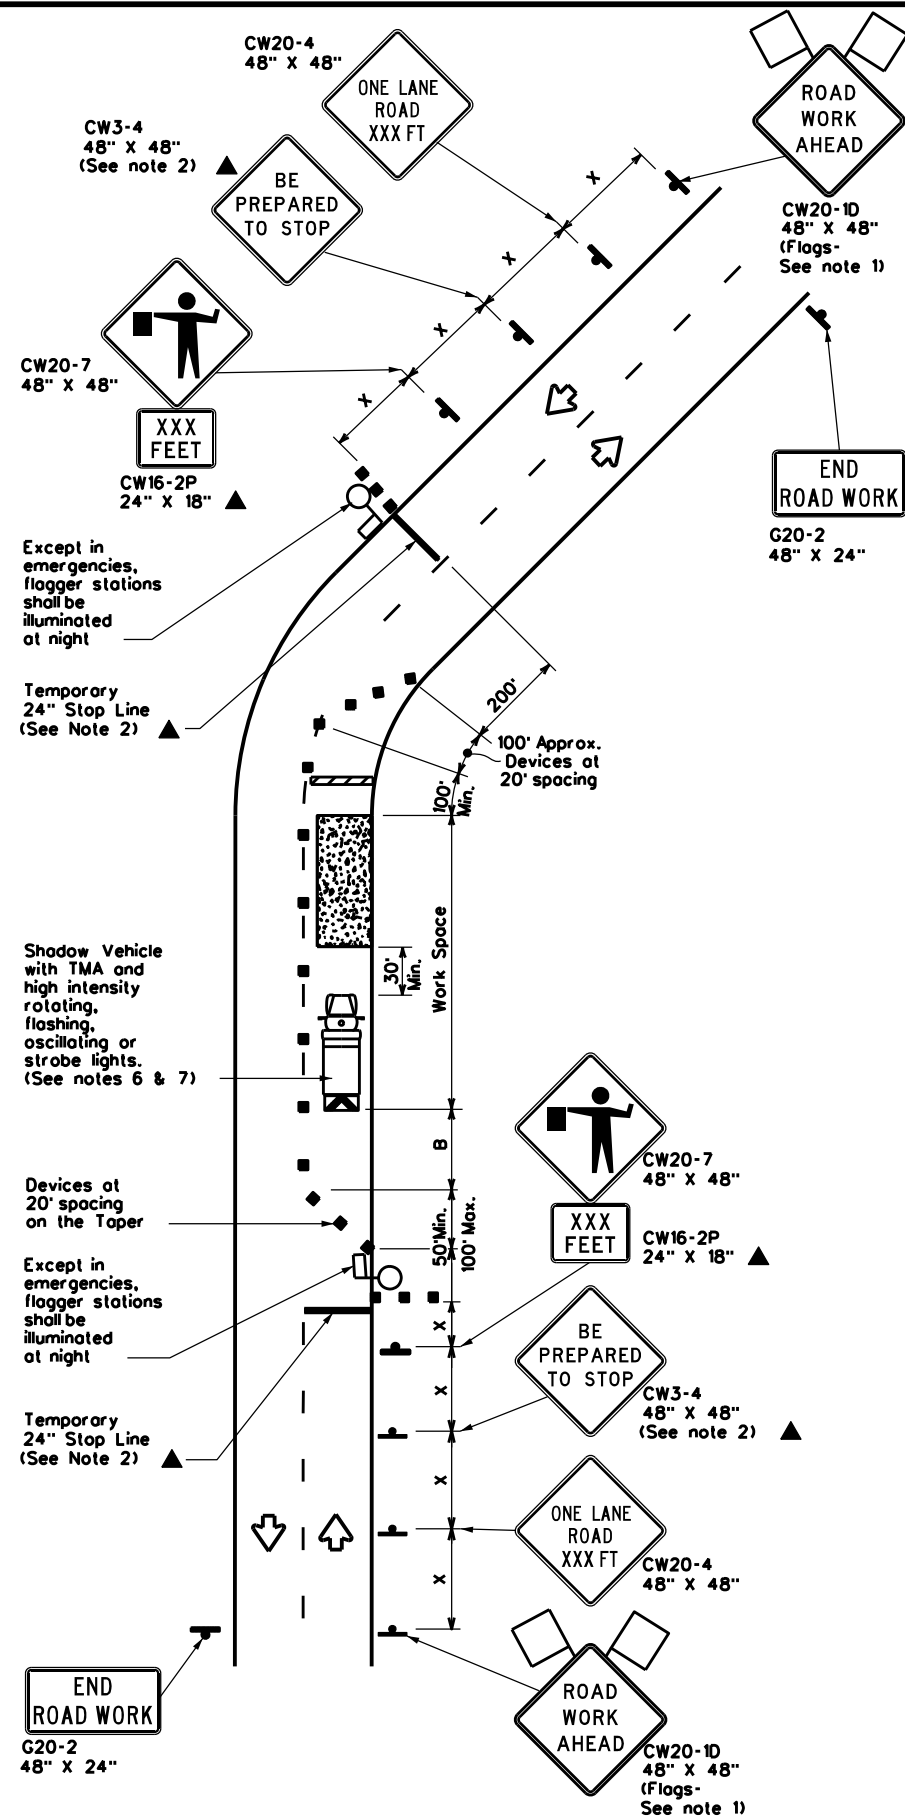

TCP (2-2b)
2-LANE ROADWAY WITHOUT PAVED SHOULDERS
ONE LANE TWO-WAY
CONTROL WITH FLAGGERS

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths * x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = $\frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only
 * x Taper lengths have been rounded off.
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)


TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES


- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - The CW3-4 "BE PREPARED TO STOP" sign may be installed after the CW20-4 "ONE LANE ROAD XXX FT" sign, but proper sign spacing shall be maintained.
 - Flaggers should use two-way radios or other methods of communication to control traffic.
 - Length of work space should be based on the ability of flaggers to communicate.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
- TCP (2-2a)**
- The R1-2 "YIELD" sign traffic control may be used on projects with approaches that have adequate sight distance. For projects in urban areas, work space should be no longer than one half city block. In rural areas, roadways with less than 2000 ADT, work space should be no longer than 400 feet.
 - The R1-2oP "YIELD TO ONCOMING TRAFFIC" sign shall be placed on a support of a 7 foot minimum mounting height.
- TCP (2-2b)**
- Channelizing devices on the center line may be omitted when a pilot car is leading traffic and approved by the Engineer.
 - If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain stopping sight distance to the flagger and a queue of stopped vehicles. (See table above).
 - Flaggers should use 24" STOP/SLOW paddles to control traffic. Flags should be limited to emergency situations.

Texas Department of Transportation		Traffic Operations Division Standard	
TRAFFIC CONTROL PLAN ONE-LANE TWO-WAY TRAFFIC CONTROL			
TCP(2-2)-18			
FILE:	tcp2-2-18.dgn	DN:	CK:
© TxDOT	December 1985	CON:	SECT:
REVISIONS 8-95 3-03 1-97 2-12 4-98 2-18		JOB HIGHWAY 010502023, ETC SH 70/86	
DIST CHS		COUNTY HALL	
		SHEET NO. 28	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

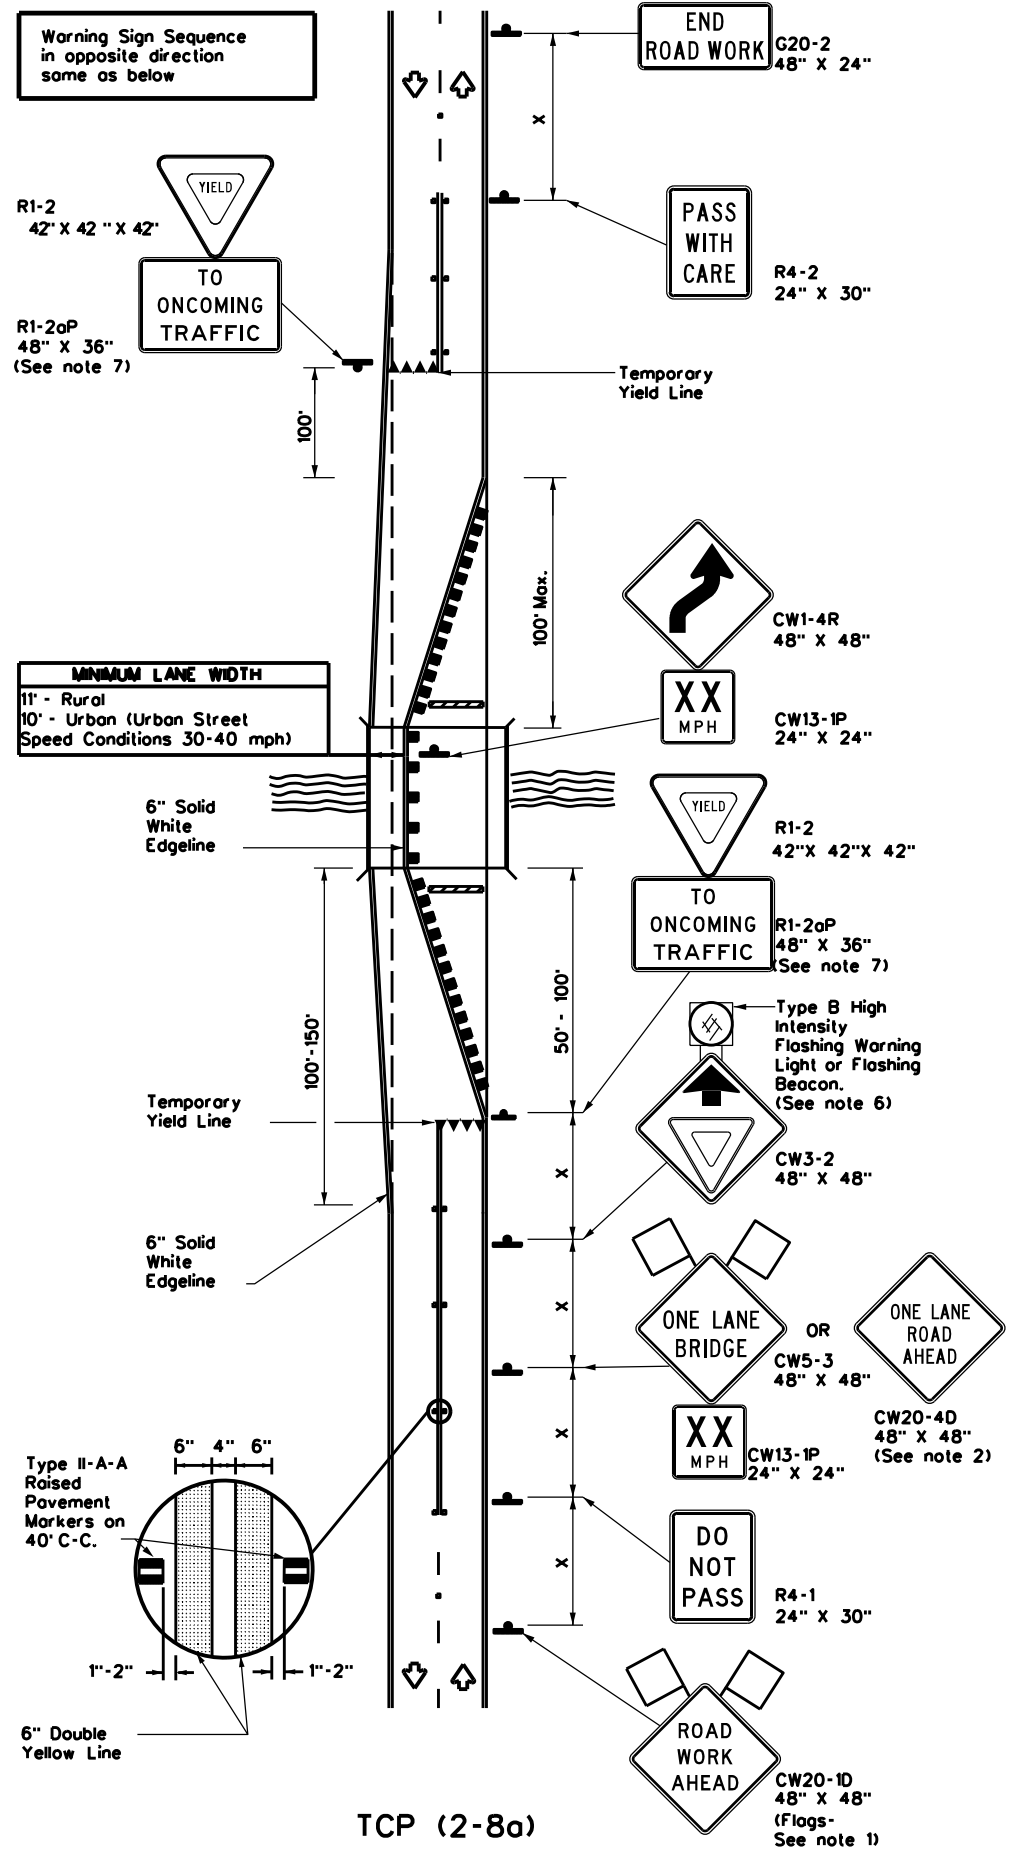

TCP (2-8a)
ONE LANE TWO-WAY
TRAFFIC CONTROL WITH YIELD SIGNS
 (Less Than 2000 ADT-See Note 5)

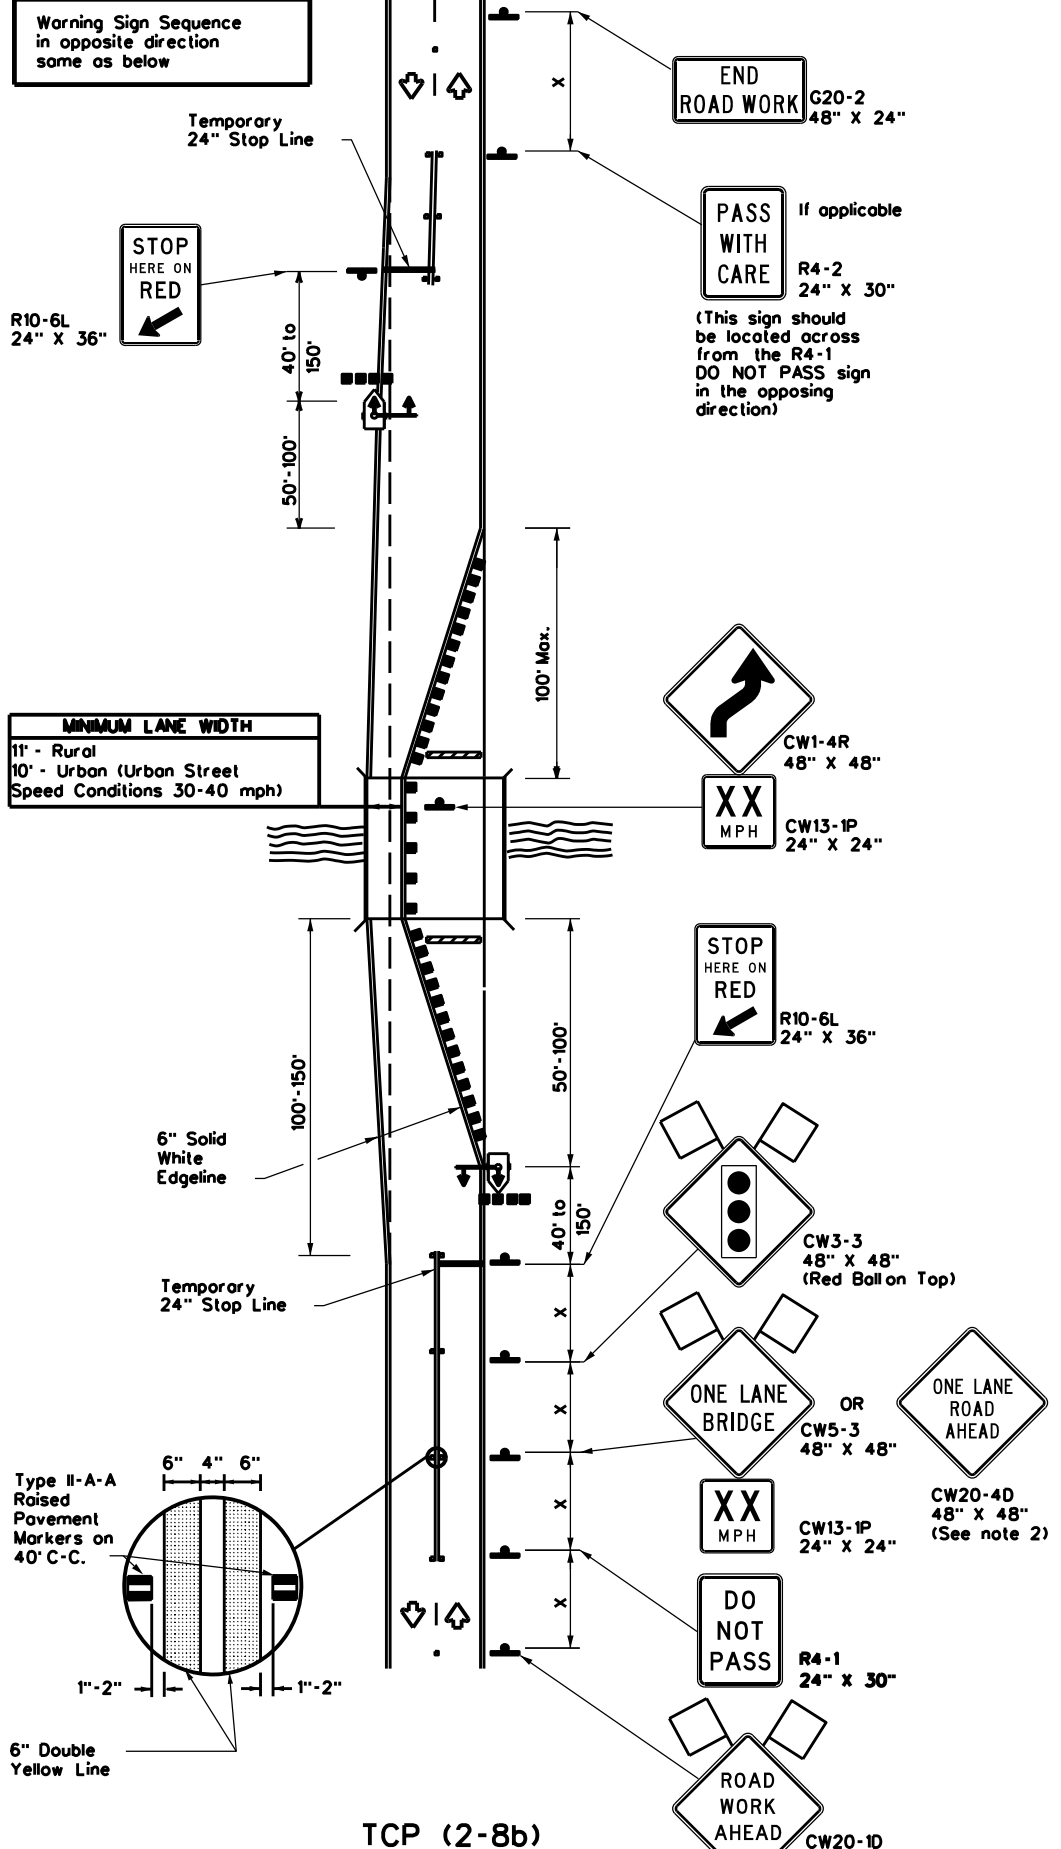

TCP (2-8b)
ONE LANE TWO-WAY
TRAFFIC CONTROL WITH TRAFFIC SIGNAL

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Sign		Traffic Flow
	Flag		Flagger
	Raised Pavement Markers Ty II-AA		Temporary or Portable Traffic Signal

Posted Speed x	Formula	Minimum Desirable Taper Lengths x =			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70	700'	770'	840'	70'	140'	800'	475'	730'	
75	750'	825'	900'	75'	150'	900'	540'	820'	

x Conventional Roads Only
 x x Taper lengths have been rounded off.
 L- Length of Taper(FT) W-Width of Offset(FT) S-Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
			✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - When this TCP is used at a location which does not involve a bridge, a 48" x 48" CW20-4D "ONE LANE ROAD AHEAD" signs should be used in lieu of the CW5-3 "ONE LANE BRIDGE" signs. The CW13-1P Advisory Speed Plaque is required with either warning sign.
 - Raised pavement markers shall be placed 40 feet c-c on centerline between DO NOT PASS signs and stop or yield lines.
 - For intermediate term situations, when it is not feasible to remove and restore pavement markings, the channelization must be made dominant by using a very close spacing. This is especially important in locations of conflicting information, such as where traffic is directed over a double yellow centerline. In such locations a maximum channelizing device spacing of 20 feet is recommended. The 20 foot channelizing device spacing recommendation is intended for the area of conflicting information and not the entire work zone.

- TCP (2-8a)**
- Traffic control by CW3-2 "YIELD AHEAD" symbolsigns for one lane two-way traffic control operations should be limited to work spaces less than 400 feet long and roadways with less than 2000 ADT. Otherwise, portable traffic signals should be used.
 - If power is available, a flashing beacon should be attached to the CW3-2 "YIELD AHEAD" symbolsign for emphasis.
 - The R1-2 "YIELD" and R1-2aP "TO ONCOMING TRAFFIC" signs and other regulatory signs shall be installed at 7 foot minimum mounting height.
- TCP (2-8b)**
- A list of approved Portable Traffic Signals can be found in the "Compliant Work Zone Traffic Control Devices" list.
 - Portable traffic signals should be located to provide adequate stopping sight distance for approaching motorist (See table above).



TRAFFIC CONTROL PLAN
LONG TERM ONE-LANE
TWO-WAY CONTROL


TCP(2-8)-23

FILE: tcp2-8-23.dgn	DN:	CK:	DW:	CK:
© TxDOT April 2023	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105	02	023, ETC.	SH86/SH70
12-85 4-98 2-18	DIST	COUNTY	SHEET NO.	
8-95 3-03 4-23	CHS	HALL	29	
1-97 2-12				


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion or damages resulting from its use.

DATE: 8/1/2023 9:45:39 PM
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\AR\010502023\TCP(3-1)13.dgn

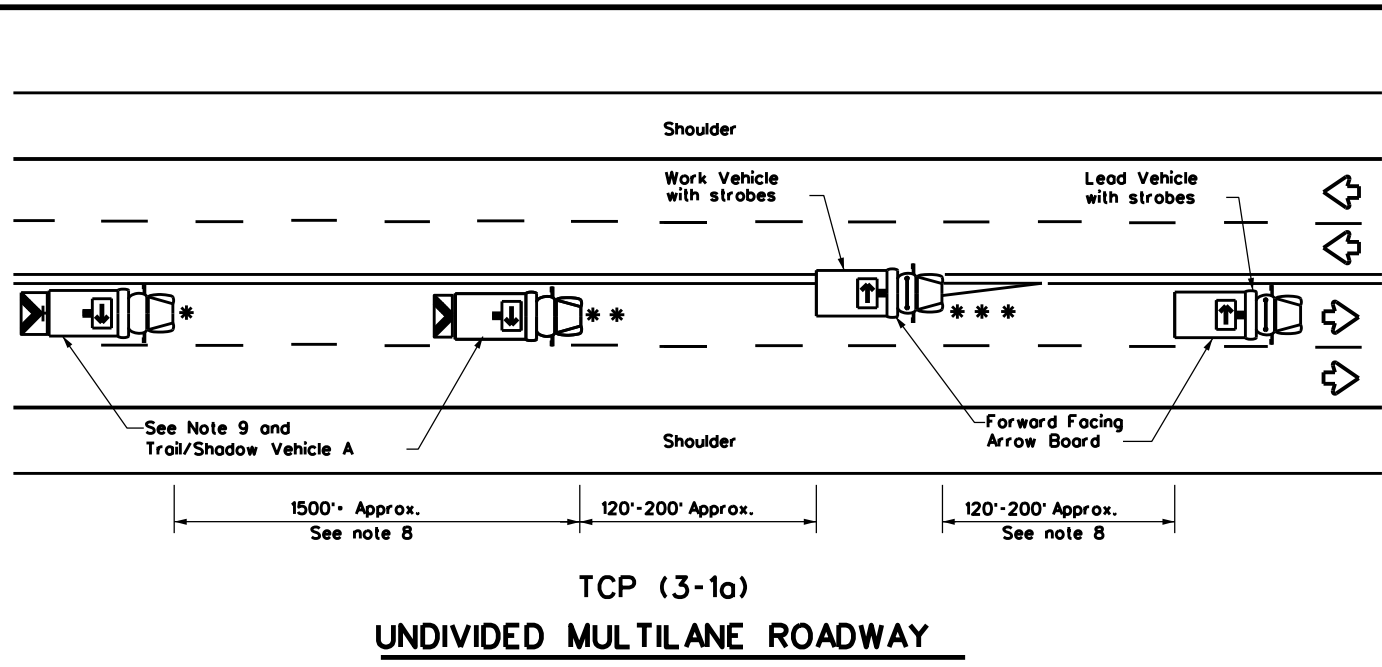

TCP (3-1a)
UNDIVIDED MULTILANE ROADWAY

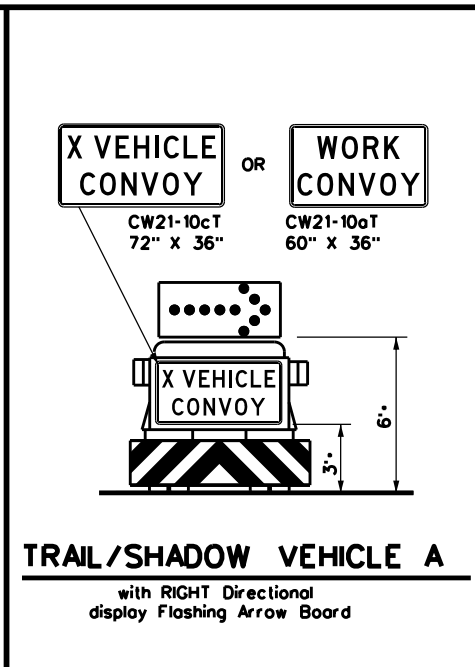


TRAIL/SHADOW VEHICLE A
with RIGHT Directional display Flashing Arrow Board

LEGEND		ARROW BOARD DISPLAY	
*	Trail Vehicle		
**	Shadow Vehicle		
***	Work Vehicle		RIGHT Directional
	Heavy Work Vehicle		LEFT Directional
	Truck Mounted Attenuator (TMA)		Double Arrow
	Traffic Flow		CAUTION (Alternating Diamond or 4 Corner Flash)


TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
✓				

GENERAL NOTES


1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used the WORK vehicle must be equipped with an arrow board. The Engineer will determine if the LEAD VEHICLE and/or TRAIL VEHICLE are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE and TRAIL VEHICLE are required.
4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
5. Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
6. Each vehicle shall have two-way radio communication capability.
7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
9. "X VEHICLE CONVOY" (CW21-10cT) or "WORK CONVOY" (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" X 48" diamond shaped "WORK CONVOY" (CW21-10T) or "X VEHICLE CONVOY" (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The "X VEHICLE CONVOY" sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
10. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a "DO NOT PASS" (R4-1) sign should be placed on the back of the rearmost protection vehicle.

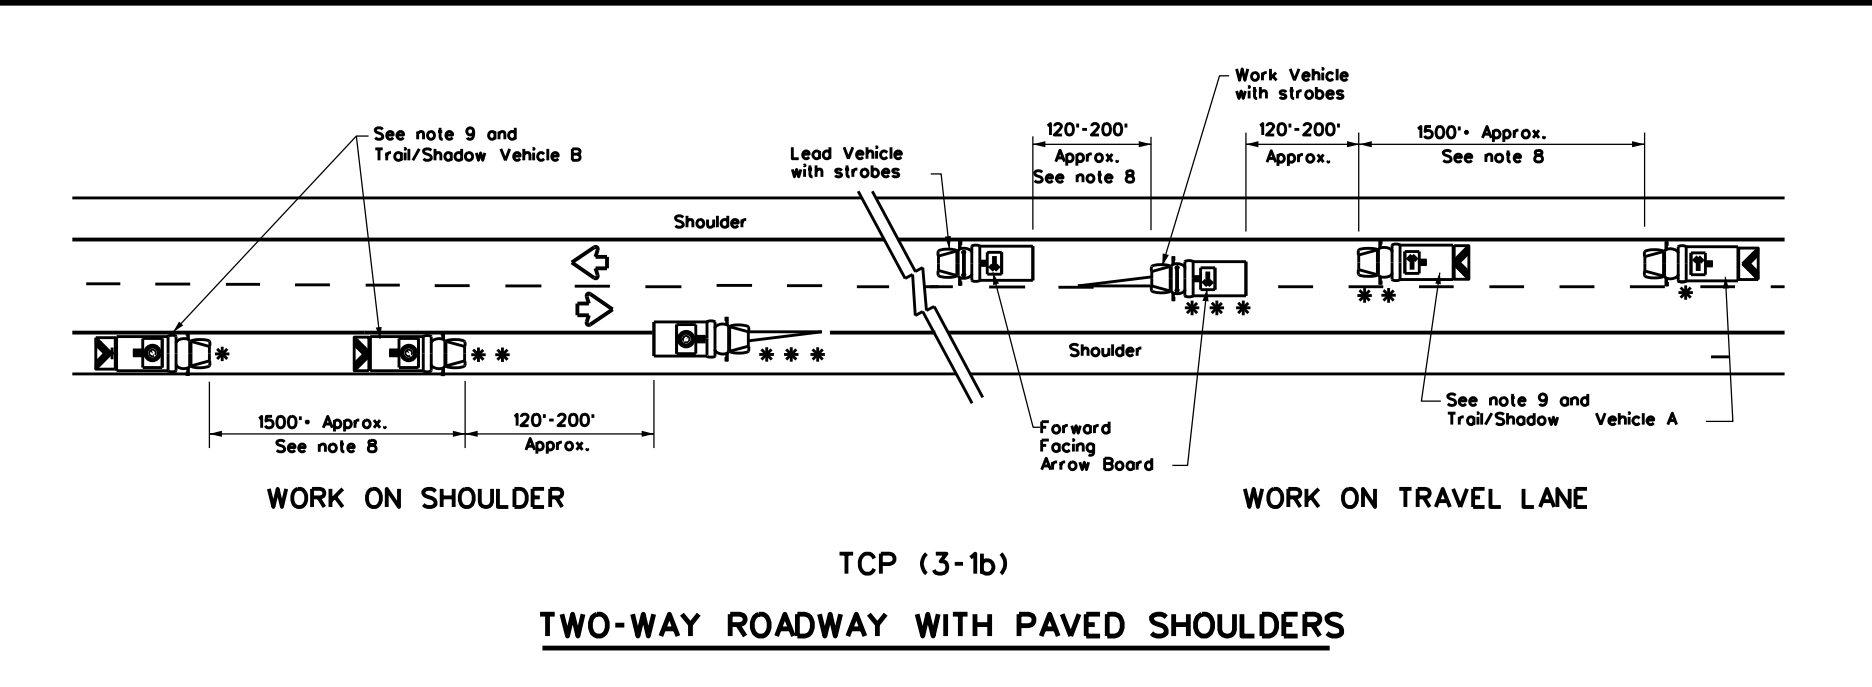


TCP (3-1b)
TWO-WAY ROADWAY WITH PAVED SHOULDERS

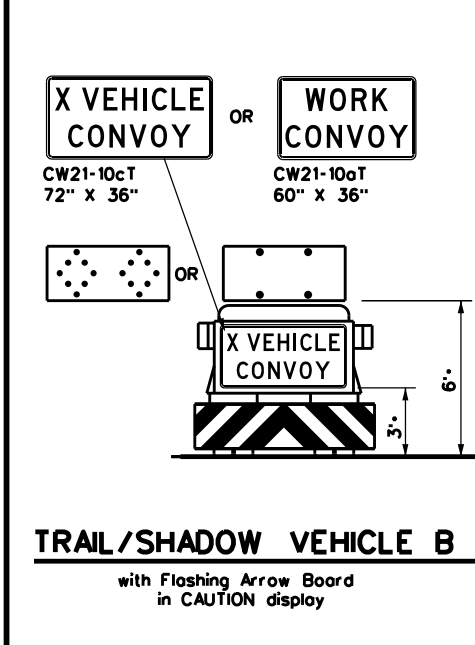

TRAIL/SHADOW VEHICLE B
with Flashing Arrow Board in CAUTION display

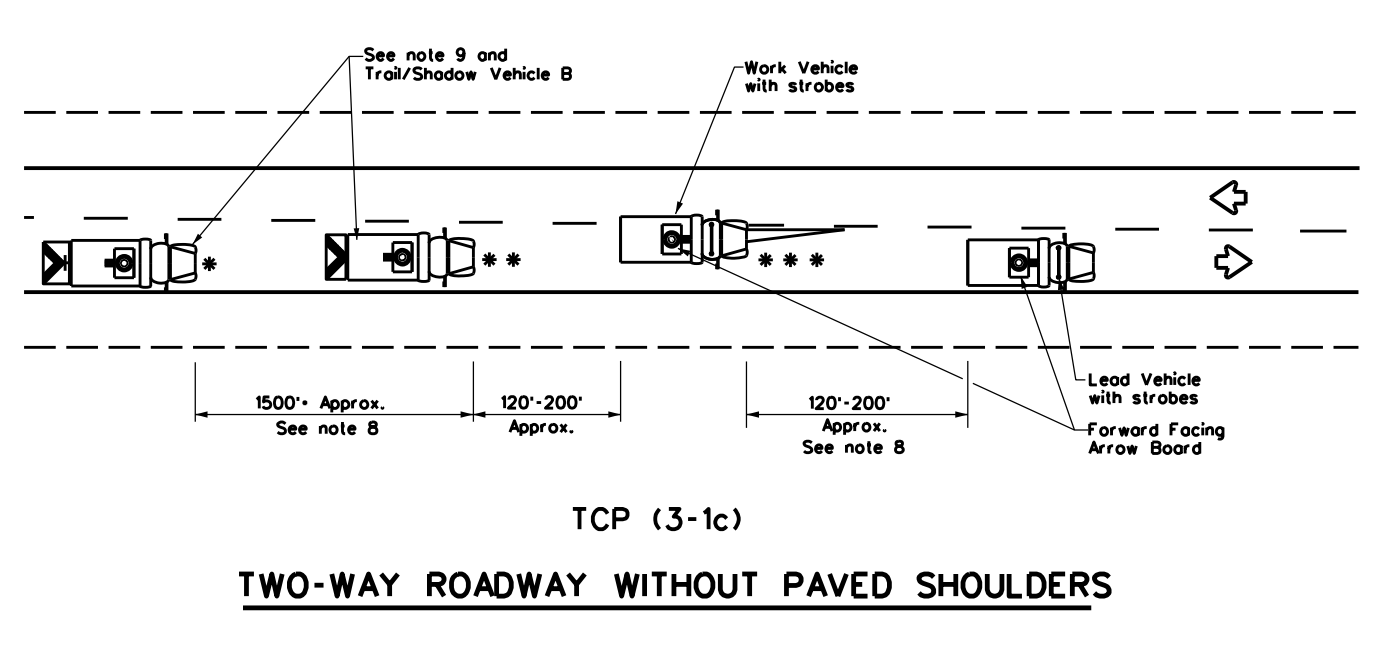

TCP (3-1c)
TWO-WAY ROADWAY WITHOUT PAVED SHOULDERS

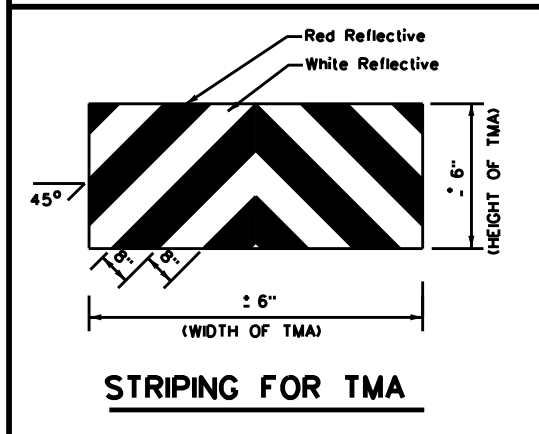

STRIPING FOR TMA


Texas Department of Transportation
 Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
UNDIVIDED HIGHWAYS
TCP(3-1)-13

FILE: tcp3-1.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	010502023, ETC. SH 70/86			
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 7-13	CHS	HALL	30	
1-97				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS

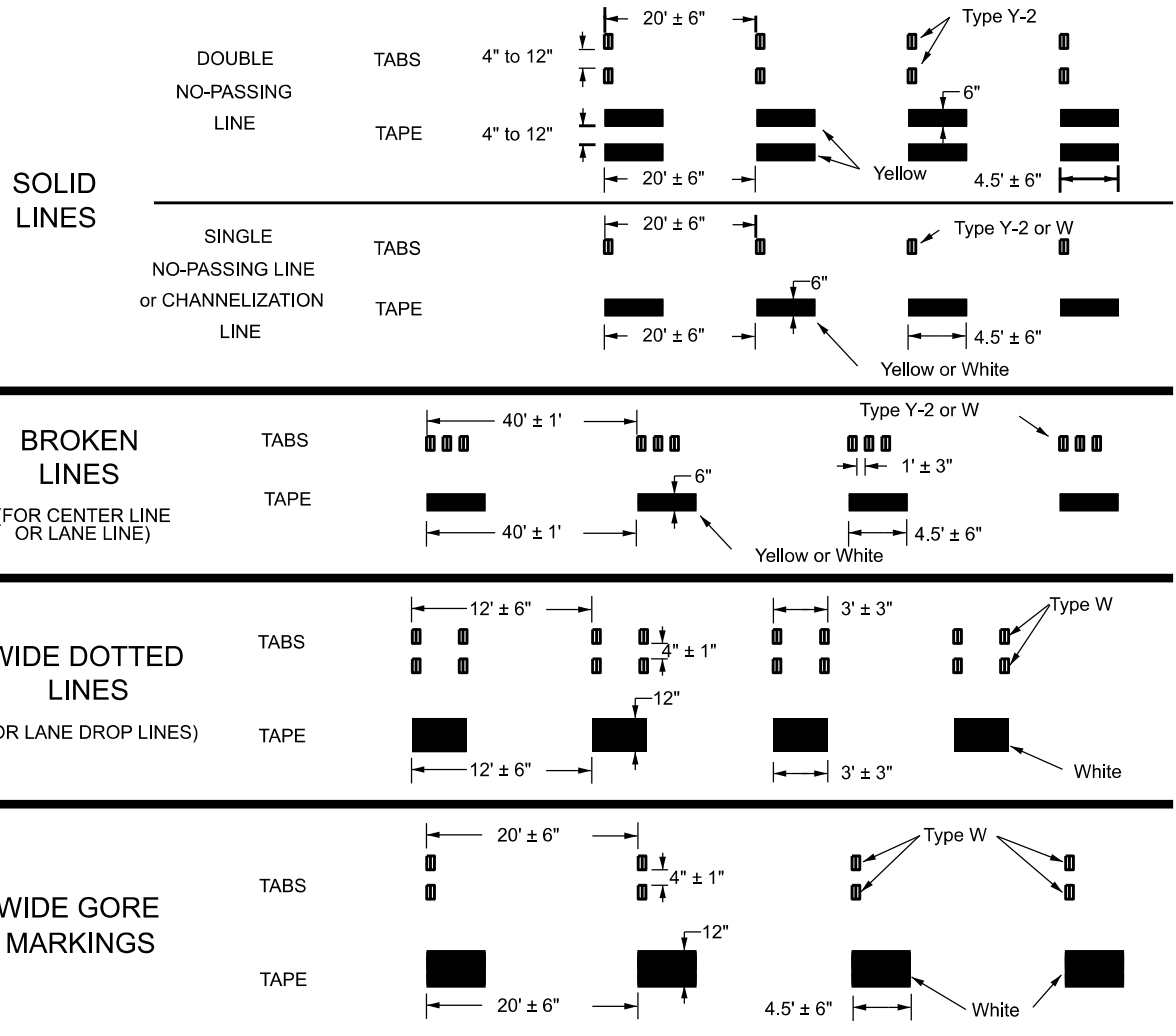


NOTES:

- Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexible reflective roadway marker tabs unless otherwise specified elsewhere in plans.
- Short term pavement markings shall NOT be used to simulate edge lines.
- Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.

TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)

- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

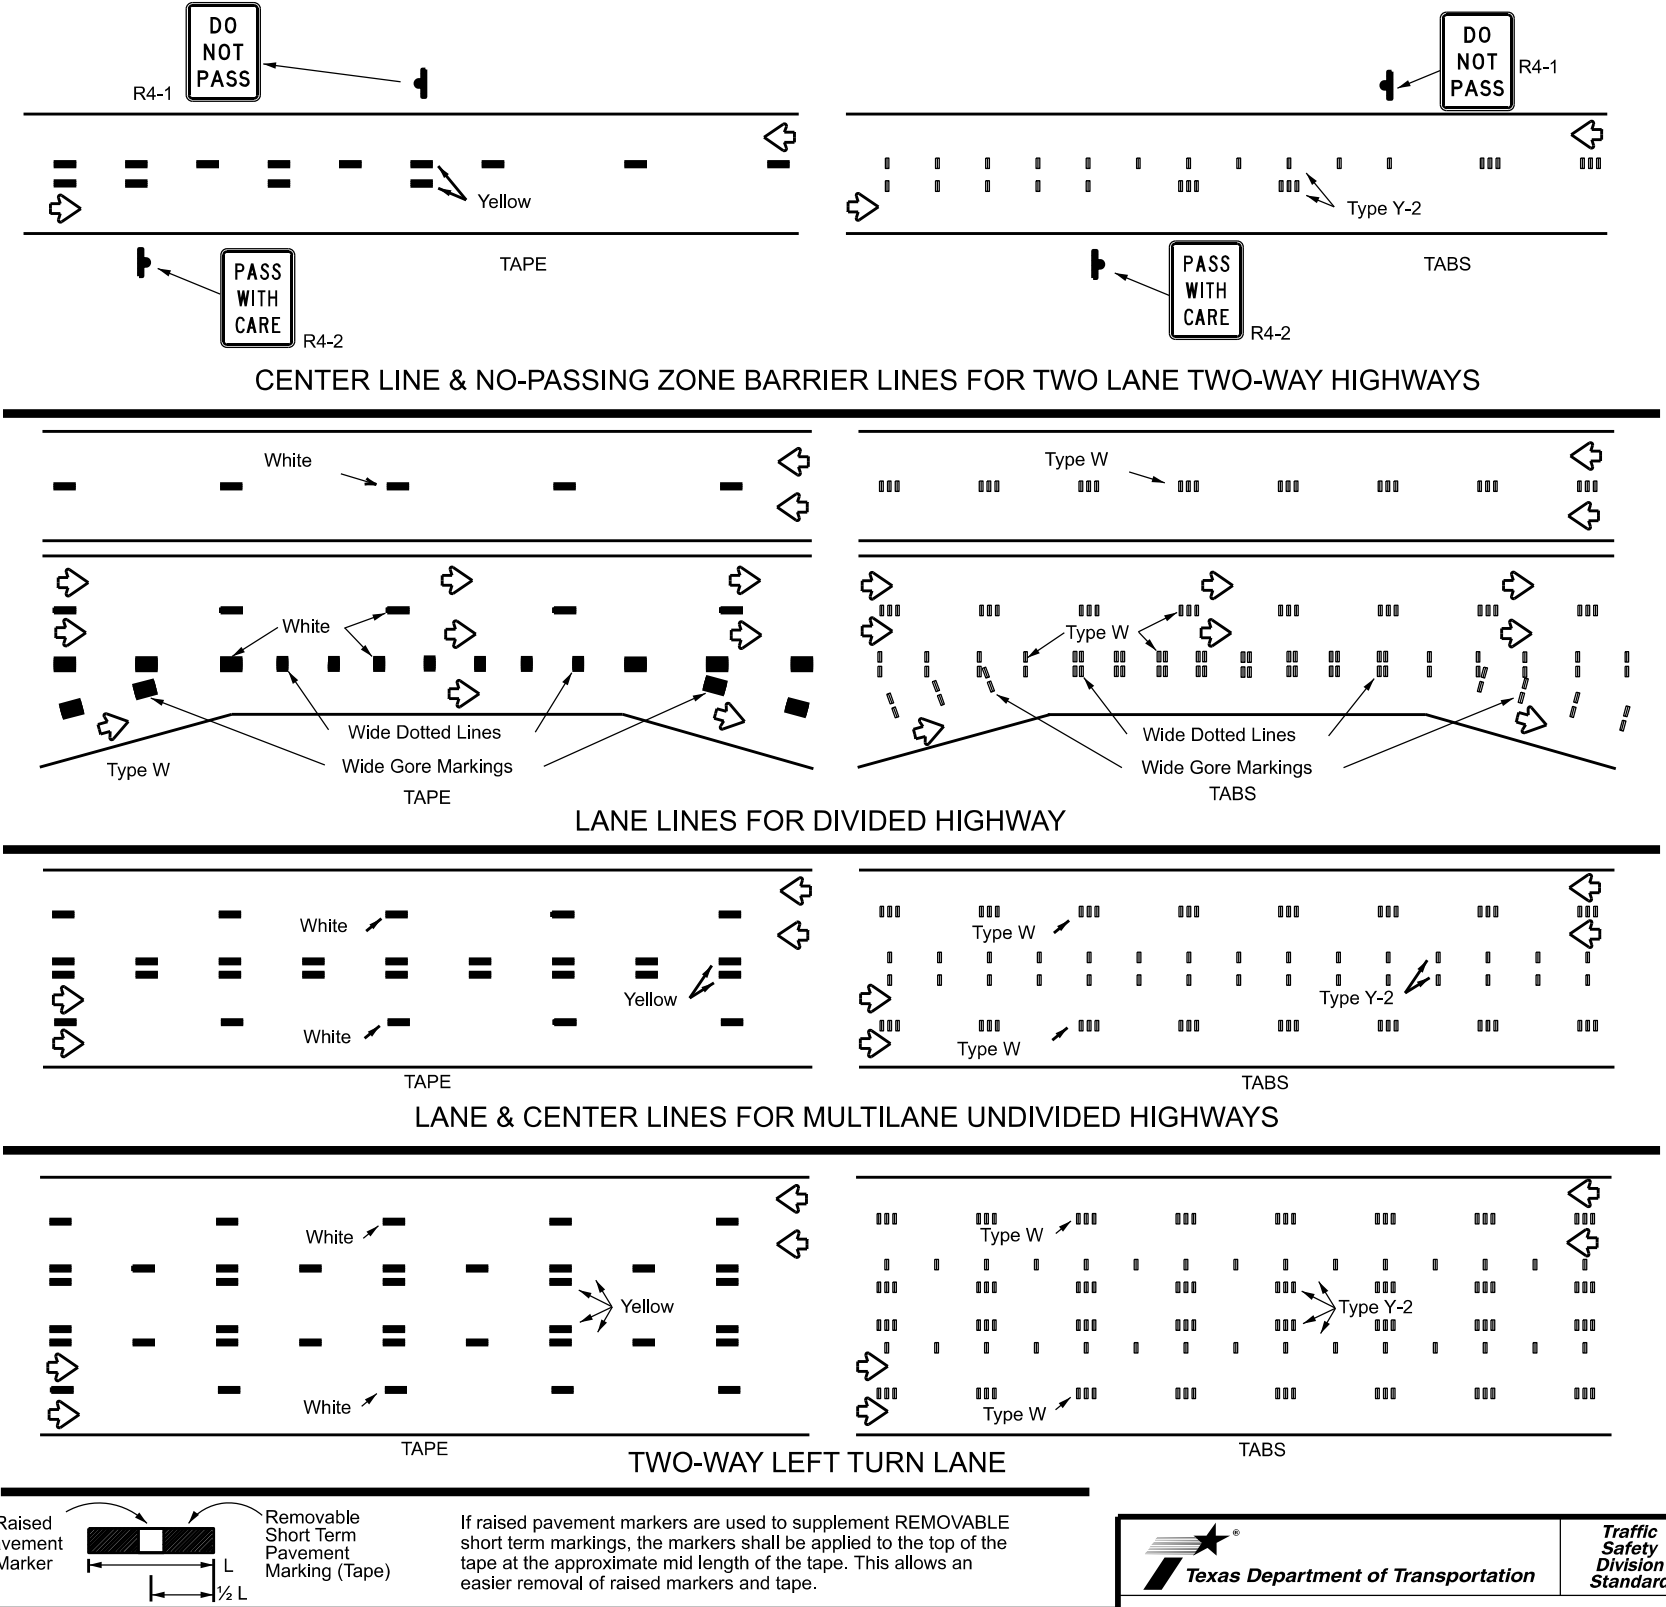

PREFABRICATED PAVEMENT MARKINGS

- Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.
- Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240 "Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Construction-Grade Prefabricated Pavement Markings."

RAISED PAVEMENT MARKERS

- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

- DMSs referenced above can be found along with embedded links to their respective MPLs at the following website:

http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm



WORK ZONE SHORT TERM PAVEMENT MARKINGS

WZ(STPM)-23

FILE:	wzstpm-23.dgn	DWG:	CK:	DWG:	CK:
© TxDOT	February 2023	CONT:	0105 02	SECT:	023, ETC.
REVISIONS		JOB:	HIGHWAY		
4-92	7-13	DIST:	COUNTY		SHEET NO.
1-97	2-23	CHS	HALL		32
3-03					

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


Warning sign and rumble strip sequence in opposite direction is same as below.

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

Rumble Strip Array (See note 1)


Rumble Strip Array (See note 1)

The second Rumble Strip Array is required when the ADT thresholds in Table 1 indicate the need for 2 Arrays.

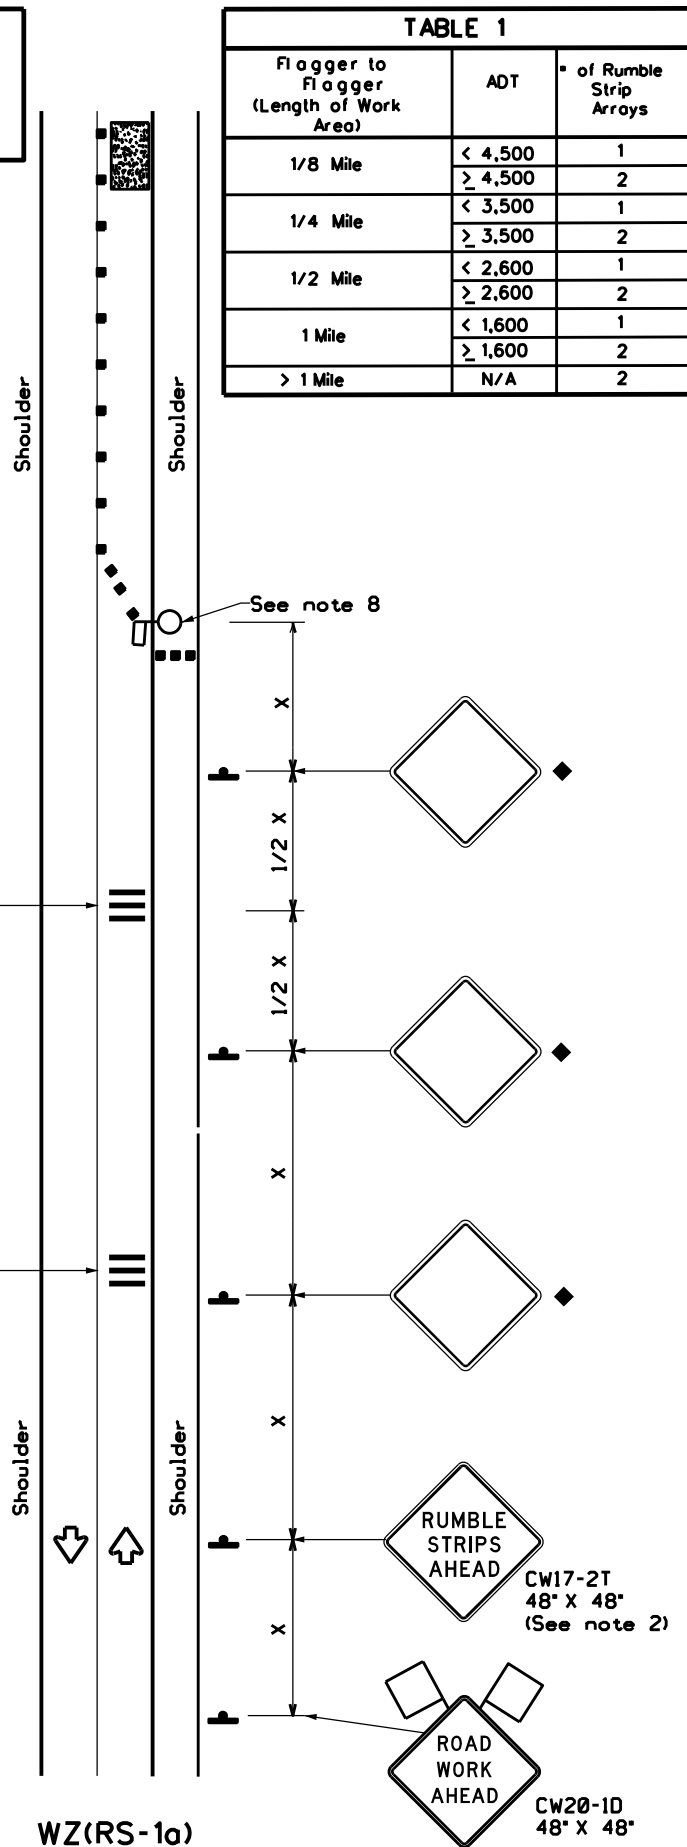

WZ(RS-1a)

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

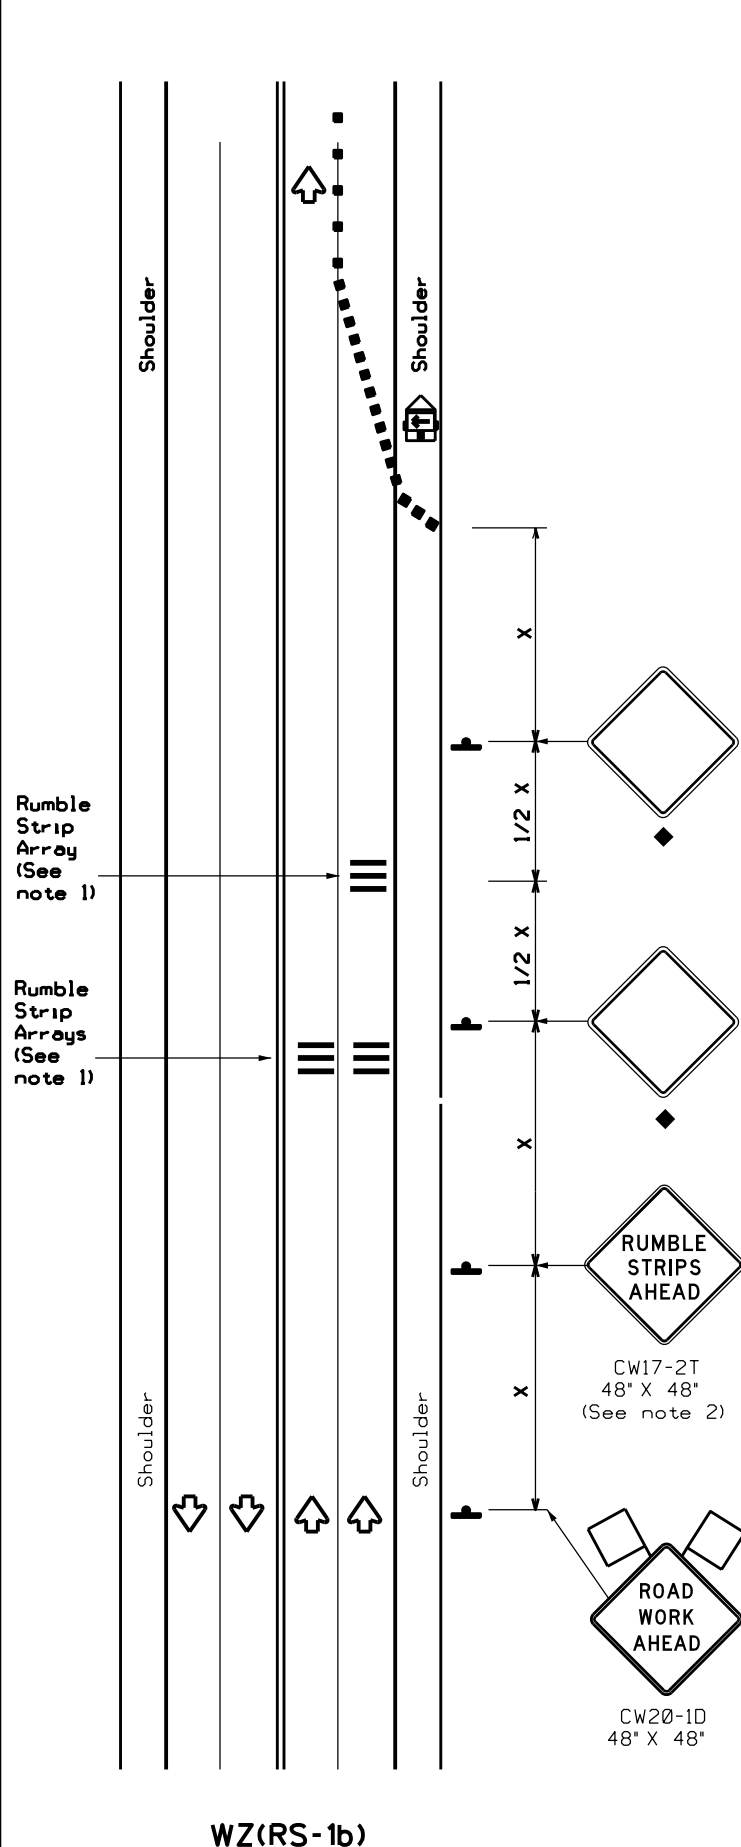

WZ(RS-1b)

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	• 35'+

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths * x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40	L = WS	265'	295'	320'	40'	80'	240'	155'
45		450'	495'	540'	45'	90'	320'	195'
50	L = WS	500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60	L = WS	600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70	L = WS	700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 * x Taper lengths have been rounded off.
 L=Length of Taper(FT) W=Width of Offset(FT)
 S=Posted Speed(MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.

• For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

Texas Department of Transportation Traffic Safety Division Standard


TEMPORARY RUMBLE STRIPS

WZ(RS)-22

FILE: wzrs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2012	CONT 0105	SECT 02	JOB HIGHWAY	
REVISIONS	0105	02	023, ETC.	SH86/SH70
2-14 1-22	DIST	COUNTY	SHEET NO.	
4-16	CHS	HALL	34	

DATE: 6/10/2022 11:33:41 AM
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\3D\DESIGN\PROJECTS\SH_86\4 - Design\3D Corridor Modeling\Geometry\SH86_ALIGNMENT.dgn

DW: CK: DW: CK: DW: CK:

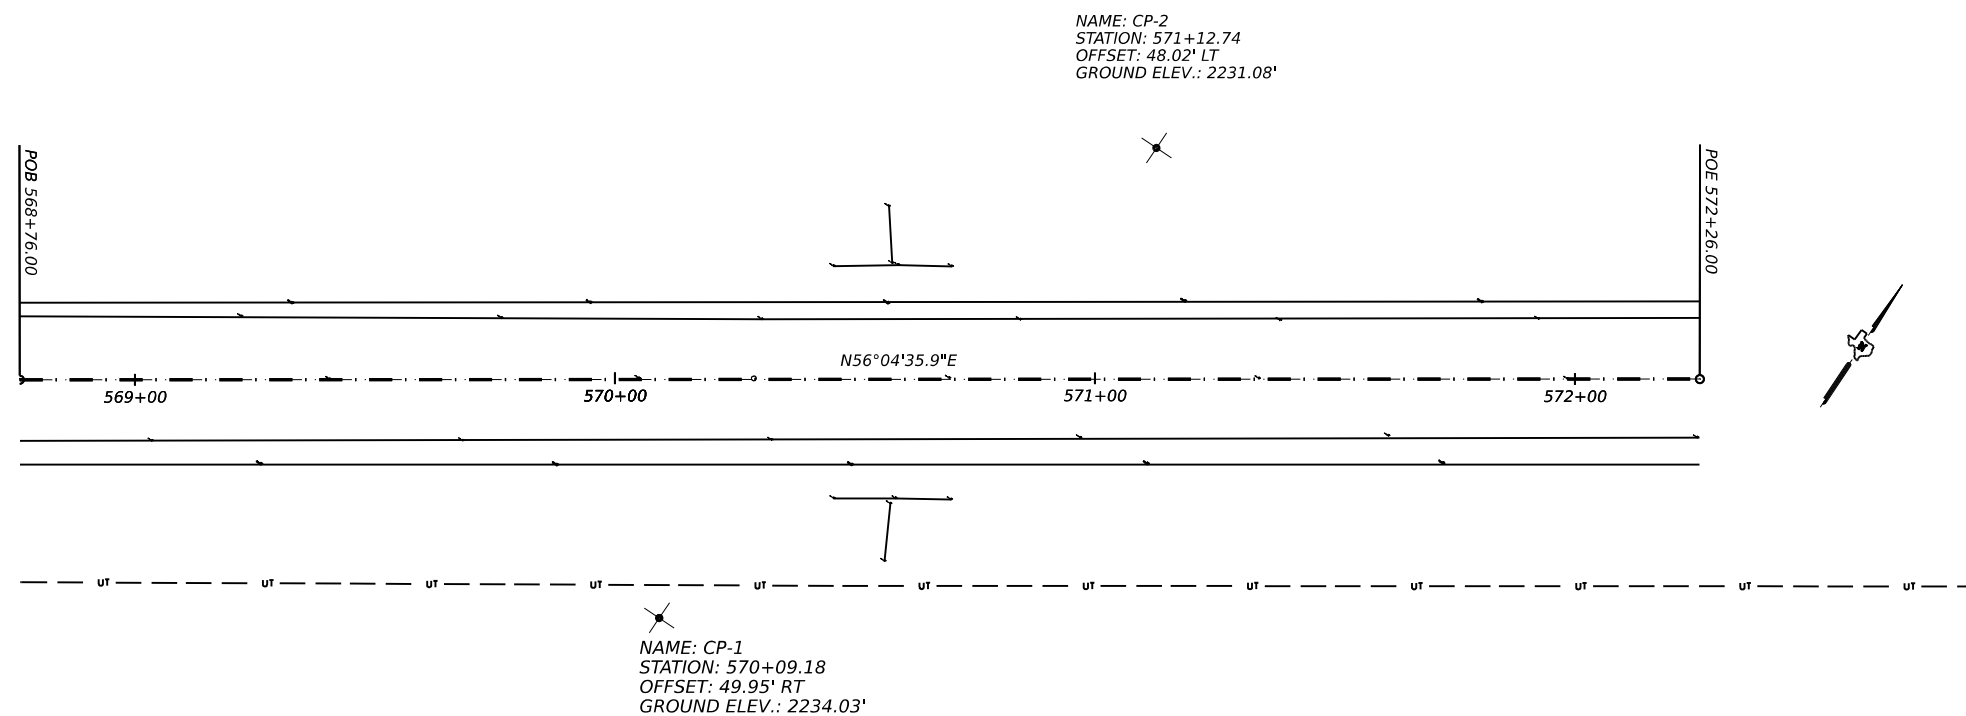

	SH 86			
	ROAD CENTERLINE			
	Station	Northing	Easting	
Element: Linear				
POB	568+76.000 R1	3445158.6	855853.194	
POE	572+26.001 R1	3445353.833	856143.684	
Tangential Direction:	N56°04'35.9\"E			
Tangential Length:		350		



Texas Department of Transportation





**SH 70/86
@ DRAW**

**SURVEY CONTROL INDEX
AND
ALIGNMENT DATA**

SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY	SHEET NO.	
CHS	HALL	35	

DATE: 6/10/2022 11:30:17 AM
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\3D\DESIGN PROJECTS\SH_86\4 - Design\Master Design Files\Sheet Boundary Container\SH86_CONTAINER_PLANPROFILE.dgn

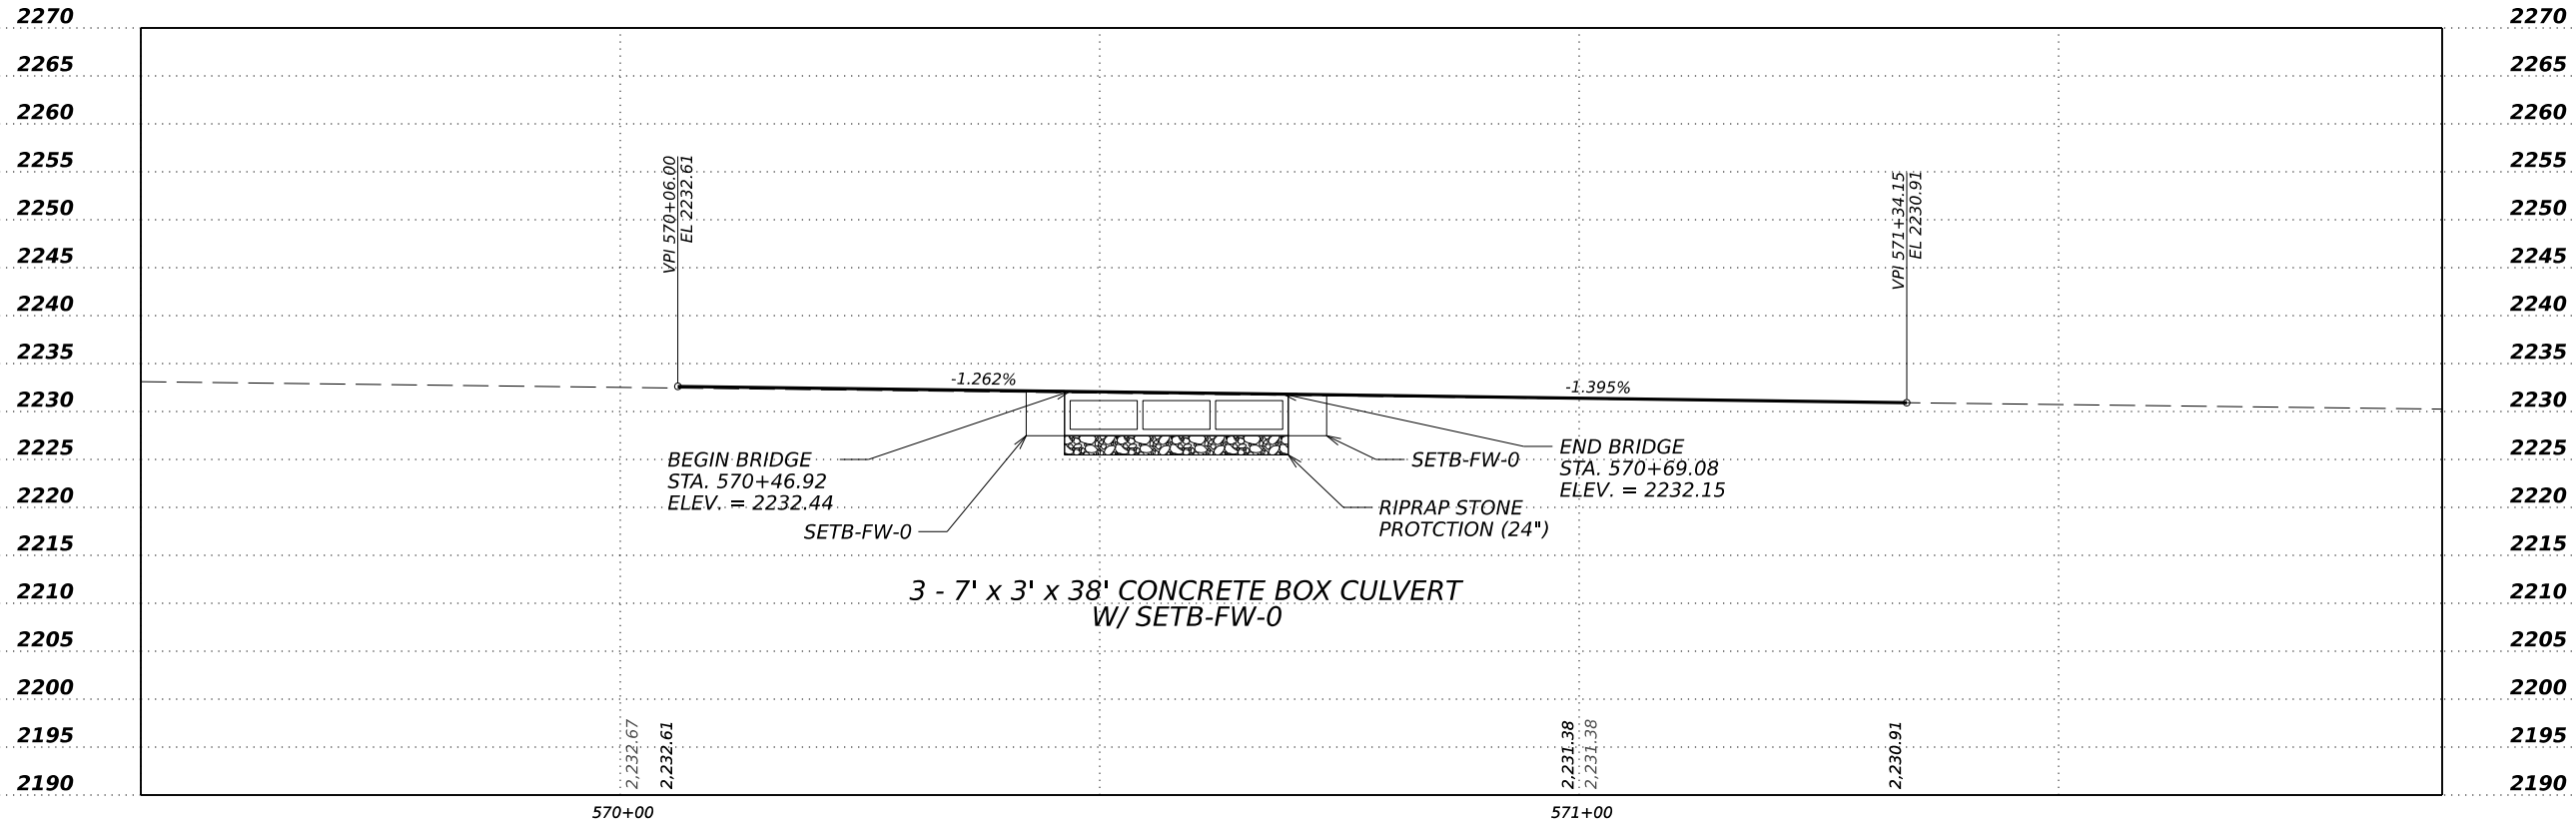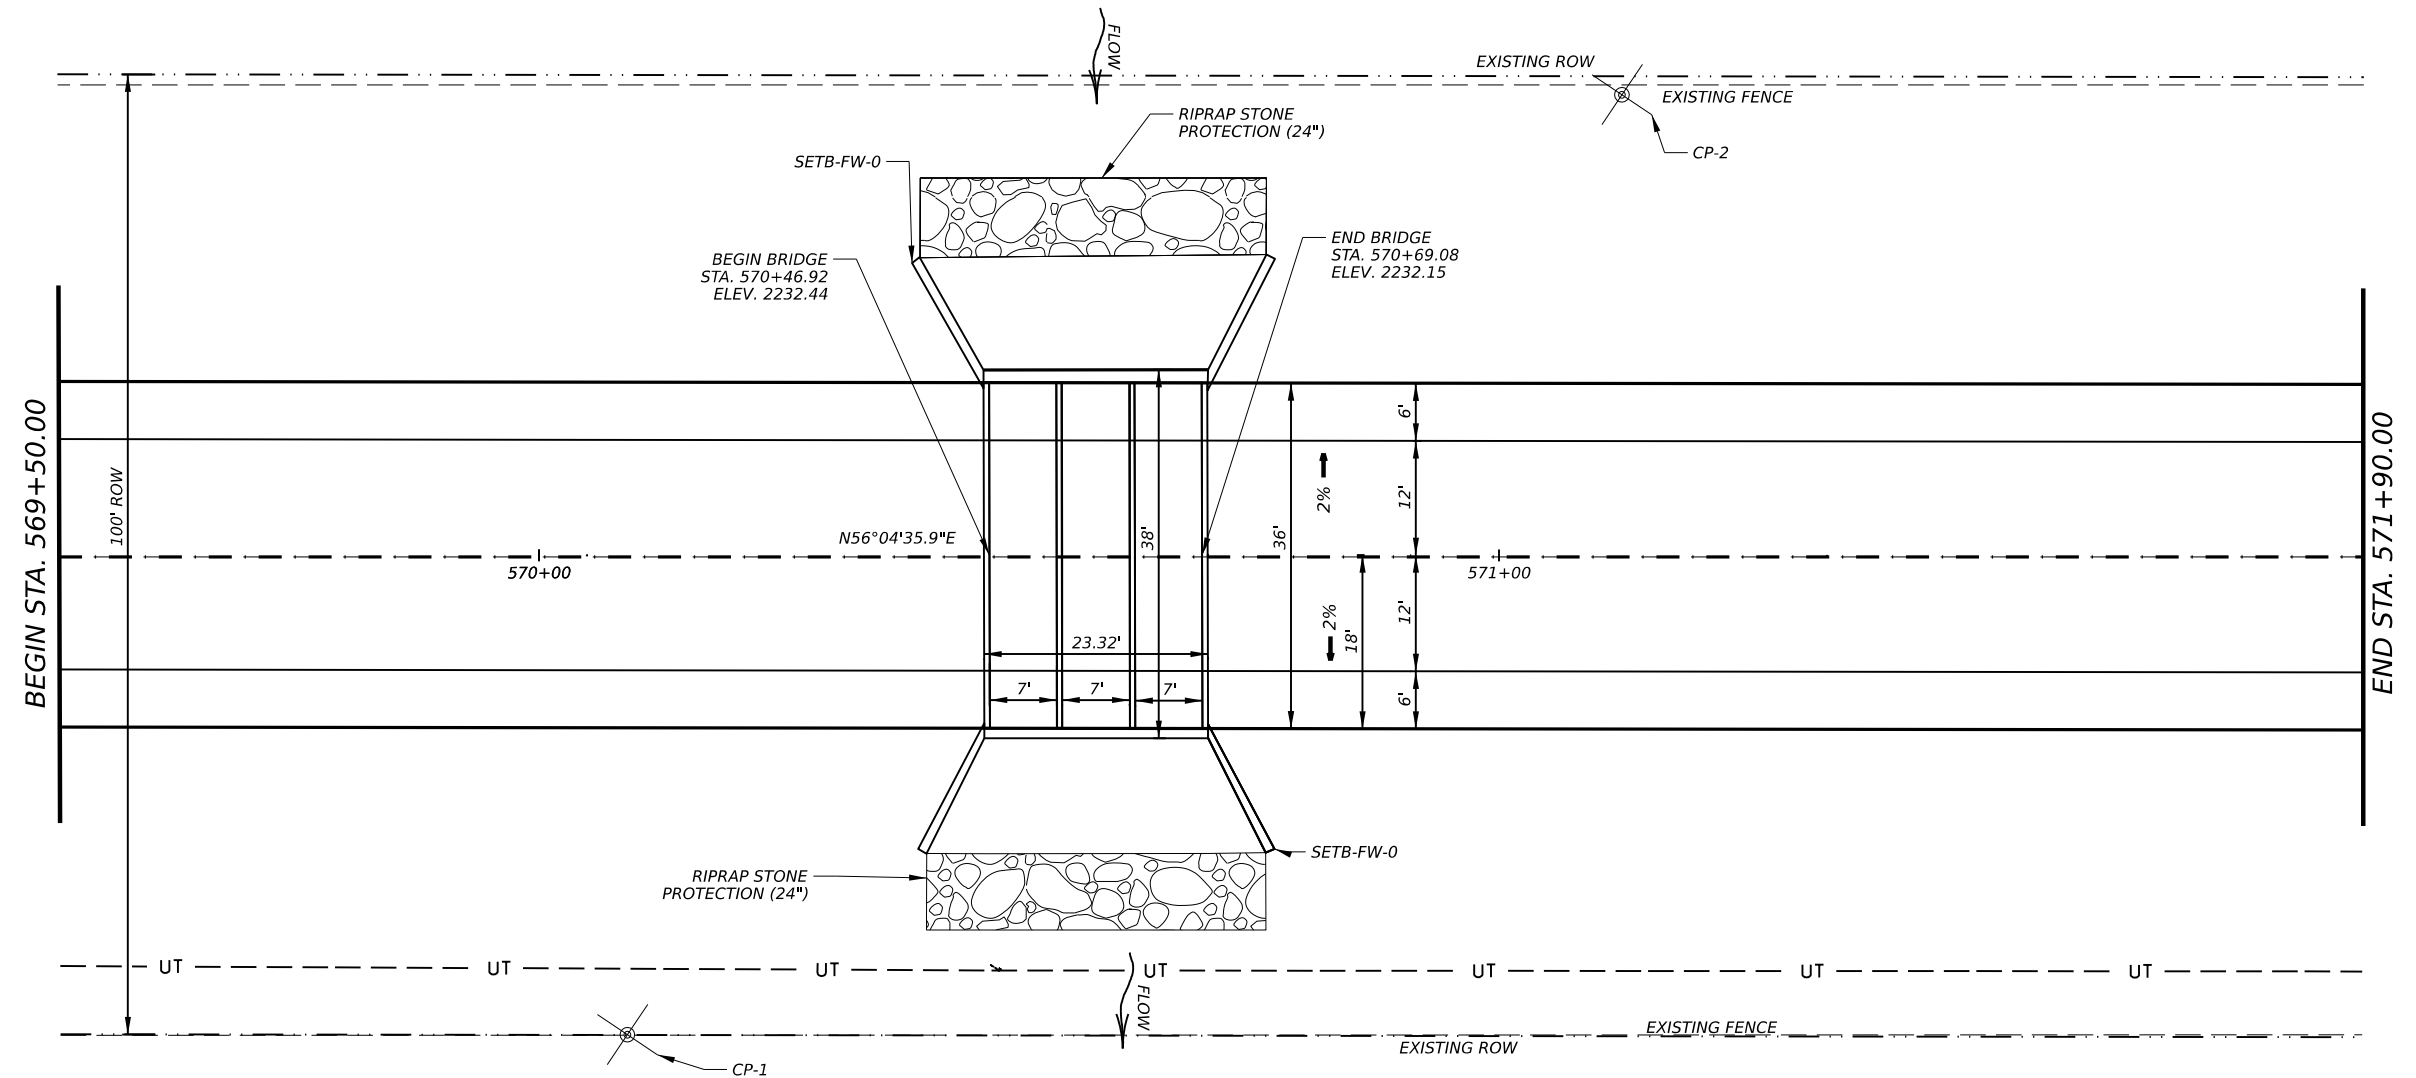

Texas Department of Transportation

**SH 86 @ DRAW
 PLAN AND PROFILE**



STA. 569+50.00
 TO
 STA. 571+90.00
 SCALE
 H - 1" = 20'
 V - 1" = 20'

SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY	SHEET NO.	
CHS	HALL	36	

DATE: 8/1/2023 1:23:27 PM
 FILE: I:\CHSD\DESIGN\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\General\Intersection Layout.dgn

DN:
 CK:
 DW:
 CK:

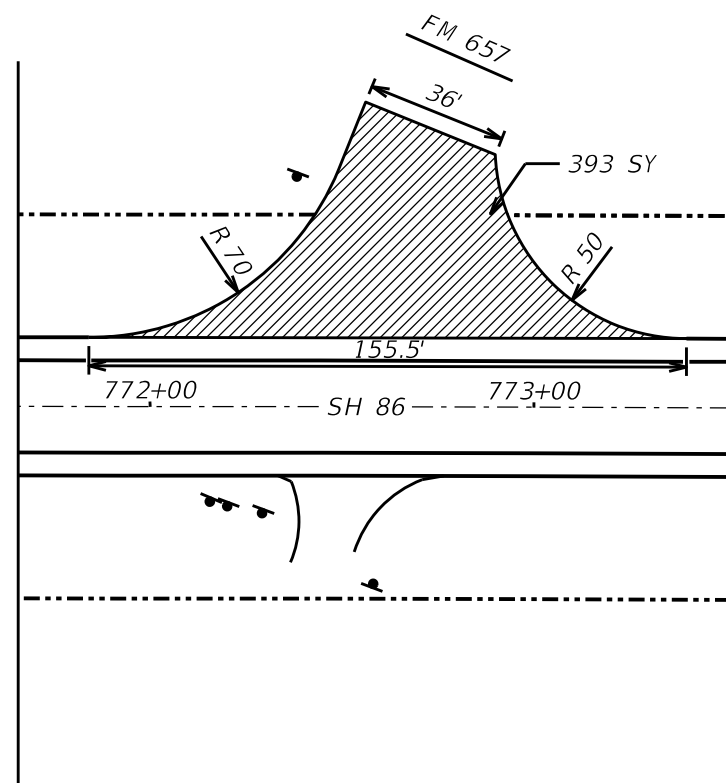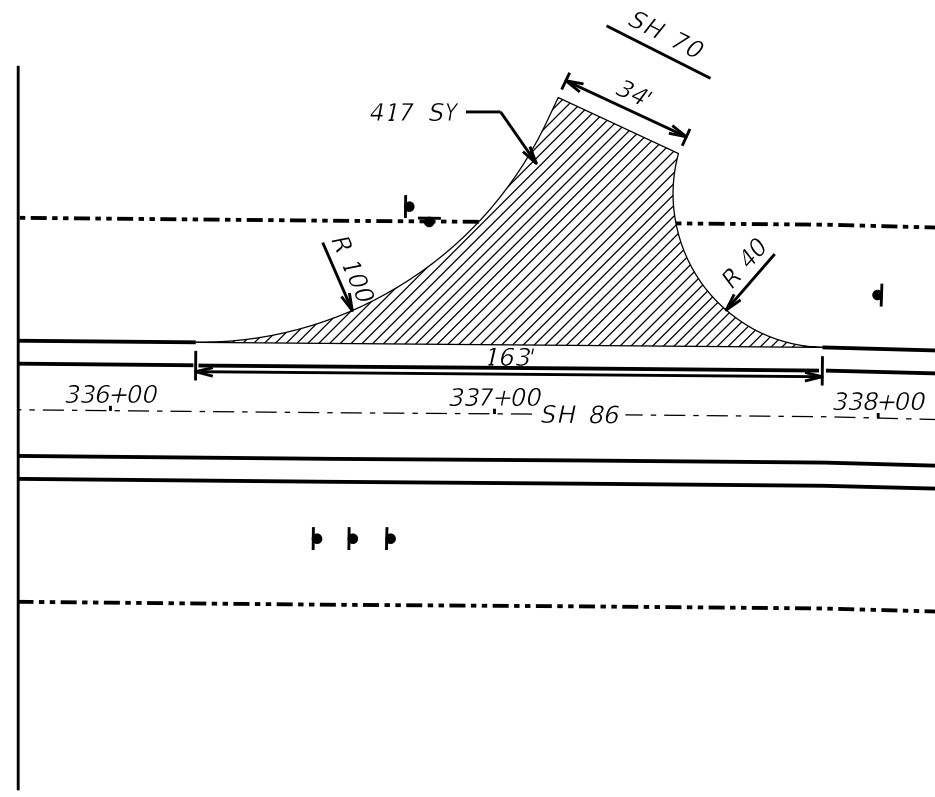

INTERSECTION SUMMARY

LOCATION	LT/ RT	AREA	D-GR HMA TY-D SAC-A PG70-28 (220 LBS/SY)	TACK COAT (0.10 GAL/SY)
		SY	TON	GAL
CSJ: 0105-02-023				
SH 70	RT	417	46	42
FM 657	LT	393	43	39
PROJECT TOTAL		810	89	81



Charles B. Steed, P.E.
 08/03/2023


SH 70/86
 INTERSECTION
 LAYOUT

NOT TO SCALE



CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY		SHEET NO.
CHS	HALL		37

DATE: 8/11/2023 12:26:23 PM
 FILE: T:\CHS\DESIGN\PROJECTS\HALL\0105-02-023\SH 86 Rehab\Plan Sheets\General\Planing Detail.dgn

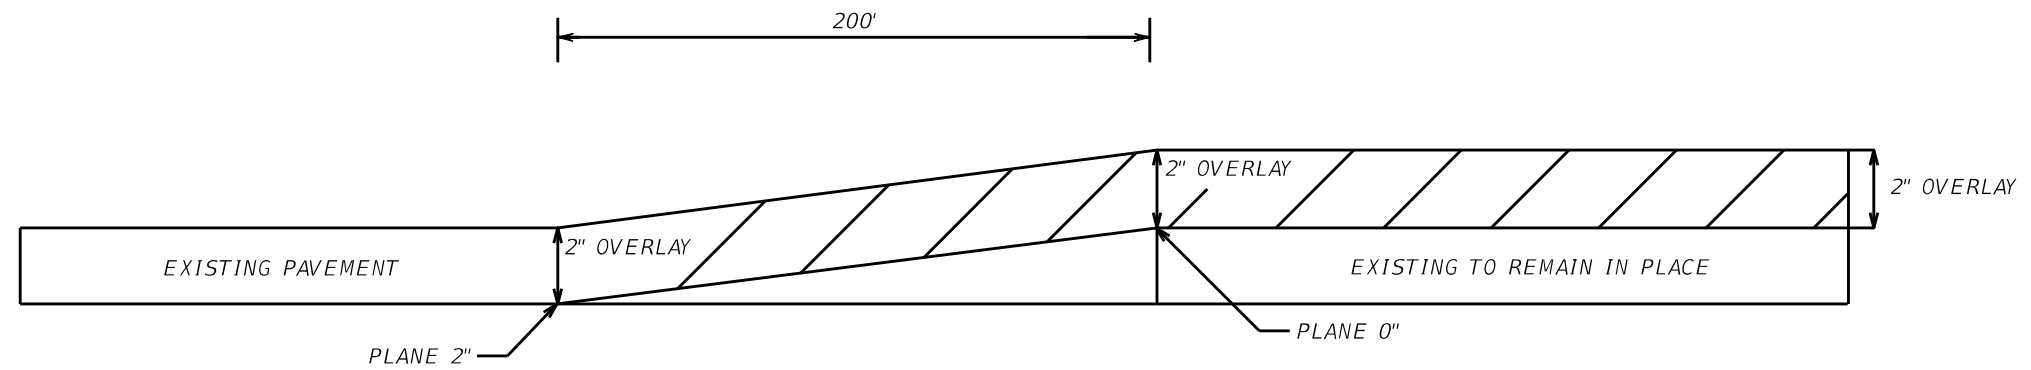

PLANING DETAIL

STA. 315+62.40 TO STA. 317+62.40 = 200.00 FT
 STA. 771+40.00 TO STA. 773+40.00 = 200.00 FT

NOTE:
 DETAILS ON THIS SHEET ARE NOT DRAWN TO SCALE.

STATE OF TEXAS
 CHARLES B. STEED
 88647
 LICENSED PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
 08/03/2023

PLANING
 DETAIL

SH 70/86



CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY	SHEET NO.	
CHS	HALL	38	

DATE: 8/1/2023 10:07:06 PM
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\OBJECT MARKERS\0105-02-023 (SH 86 Rehab)\0105-02-023 (SH 86 Rehab).dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or for damages resulting from its use.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS				DELINEATORS				D & OM DESCRIPTIVE CODES	
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	SINGLE		DOUBLE		INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX(XX) NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRFL = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount DIRECTION If Required Bi = Bi-Directional BR = Bi-Directional with red on back
SHEETING: Yellow, White or Red Type B or C reflective sheeting				SHEETING: Yellow, White or Red Type B or C Reflective Sheeting				INSTL OM ASSM (OM-XX) (XXXX)XXX(XX) TYPE OF OBJECT MARKER 1, 2, 3, or 4 NUMBER OF REFLECTORS OR DIRECTION X = 3-Size 2 reflector units (Type 2 only) Y = 1-Size 3 reflector unit (Type 2 only) Z = 3-Size 1 or 1-Size 4 reflector unit(s) (Type 2 only) L = Left Side (Type 3 Object Marker only) R = Right Side (Type 3 Object Marker only) C = Center (Type 3 Object Marker only) TYPE OF POST WC = Wing Channel Post WFLX = White Flexible Post TWT = Thin Walled Tubing TYPE OF MOUNT GND = Embedded (drivable) SRF = Surface Mount WAS = Wedge Anchor Steel WAP = Wedge Anchor Plastic DIRECTION If Required Bi = Bi-Directional	
NOTE				POST TYPE				MOUNT TYPE	
				WC		YFLX, WFLX		WC	
				GND		GND, SRF		GND, SRF	

OBJECT MARKERS								
DEVICE	Type 1 (OM-1)	Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4
								SHEETING: Yellow-Type B or C Sheeting POST TYPE: TWT MOUNT TYPE: WAS, WAP
	SHEETING: Yellow - Type B or C Sheeting			SHEETING: Alternating acrylic black and retroreflective yellow - Type B or C Sheeting			SHEETING: Red - Type B or C Sheeting	POST TYPE: WC, WFLX, TWT MOUNT TYPE: GND, SRF, WAS, WAP

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW			
DEVICE	GF1	GF2	CTB	W1-8				W1-6		
					NOTE: 1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).					
SHEETING: Yellow, White, Red NOTE: 1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			SIZE (W x L)	18" x 24" (Conventional)	24" x 30" (Conventional Oversize)	30" x 36" (Expressway)	36" x 48" (Freeway)	SIZE (W x L)	48" x 24" (Conventional)	60" x 30" (Expressway & Freeway)
			MOUNTING HEIGHT	4'-0" or 7'-0"		7'-0" Only		MOUNTING HEIGHT	7'-0"	

DEPARTMENTAL MATERIAL SPECIFICATIONS	
FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600

NOTE:
 Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.



DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION				D & OM(1)-20			
FILE:	dom1-20.dgn	DN:	TXDOT	CK:	TXDOT	DW:	TXDOT
© TXDOT	August 2004	CONT:	SECT:	JOB:	HIGHWAY:		
REVISIONS		0105 02	023, ETC.	SH 70/86			
10-09	3-15	DIST:	COUNTY:	SHEET NO.			
4-10	7-20	CHS	HALL	39			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/1/2023
 10:09:28 PM
 FILE: T:\CHSD\ES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARD SHEETS\0105-02-023.dwg


POST TYPE AND SUPPORT FOUNDATION DETAILS				TYPE OF BARRIER MOUNTS																										
WING CHANNEL (WC)	FLEXIBLE POSTS (YFLX, WFLX)		WEDGE ANCHOR SYSTEMS		GUARD FENCE ATTACHMENT																									
GND	GND	SRF	WAS	WAP	GF1																									
	EMBEDDED	SURFACE MOUNT	STEEL	PLASTIC	GF2																									
NOTES 1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only. 2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.			NOTES 1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices. 2. Install per manufacturer's recommendations. 3. Post length may vary to meet field conditions. 4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.																											
TYPES 1, 3, AND 4 OBJECT MARKERS AND CHEVRONS			CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN		CONCRETE TRAFFIC BARRIER (CTB) 																									
					GENERAL NOTES 1. Place delineators on a section of roadway at a consistent distance from the edge of pavement. 2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction. 3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible. 4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation. 5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface. 6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.																									
NOTE Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)			NOTE Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.		DELINEATORS AND TYPE 2 OBJECT MARKERS 																									
			NOTE See general notes 1, 2 and 3.																											
DELINEATOR & OBJECT MARKER INSTALLATION D & OM(2)-20																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>FILE: dom2-20.dgn</td> <td>DN: TxDOT</td> <td>CK: TxDOT</td> <td>DW: TxDOT</td> <td>CK: TxDOT</td> </tr> <tr> <td>© TxDOT August 2004</td> <td>CONT</td> <td>SECT</td> <td>JOB</td> <td>HIGHWAY</td> </tr> <tr> <td>REVISIONS</td> <td>0105 02</td> <td>023, ETC.</td> <td>SH 70/86</td> <td></td> </tr> <tr> <td>10-09 3-15</td> <td>DIST</td> <td>COUNTY</td> <td>SHEET NO.</td> <td></td> </tr> <tr> <td>4-10 7-20</td> <td>CHS</td> <td>HALL</td> <td>40</td> <td></td> </tr> </table>						FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT	© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY	REVISIONS	0105 02	023, ETC.	SH 70/86		10-09 3-15	DIST	COUNTY	SHEET NO.		4-10 7-20	CHS	HALL	40	
FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT																										
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY																										
REVISIONS	0105 02	023, ETC.	SH 70/86																											
10-09 3-15	DIST	COUNTY	SHEET NO.																											
4-10 7-20	CHS	HALL	40																											

DATE: 8/1/2023 10:12:47 PM
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARD\STANDARD.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS


Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	• RPMs	• RPMs
15 MPH & 20 MPH	• RPMs and One Direction Large Arrow sign	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	• RPMs and Chevrons

SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

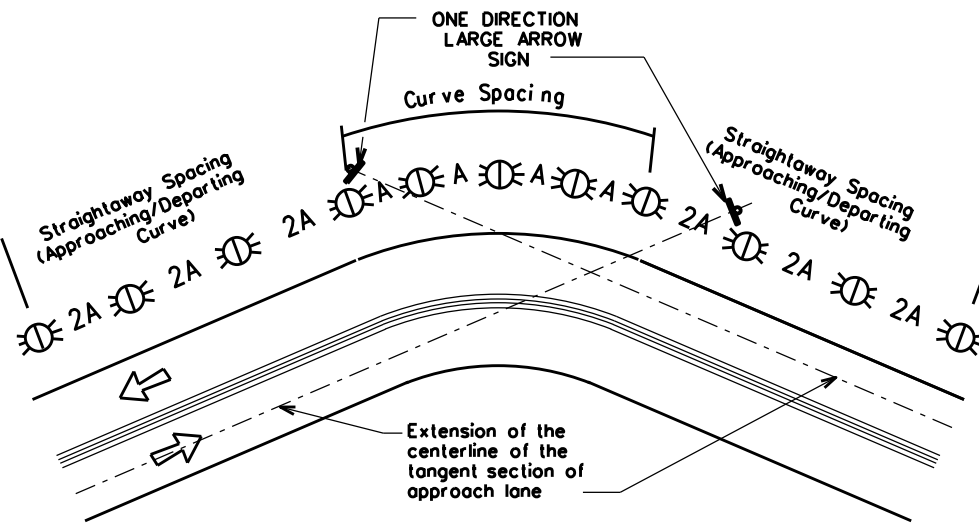

NOTE
 ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

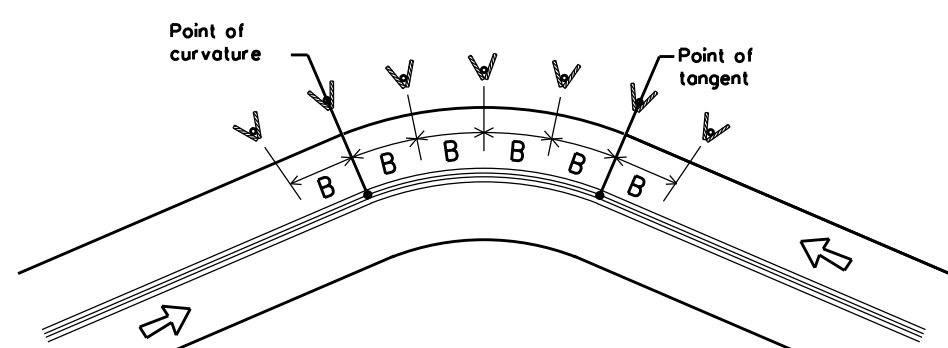

NOTE
 At least one chevron pair is installed beyond the point of tangent in tangent section.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy./Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

NOTES

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign

Traffic Safety Division Standard


DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(3)-20

FILE: dom3-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105 02	023, ETC.	SH	70/86
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	CHS	HALL	41	


DATE: 8/1/2023 10:15:58 PM
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan_Sheets\01050203, ETC\SH 70/86.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information or for any results or damages resulting from its use.

CROSSOVERS

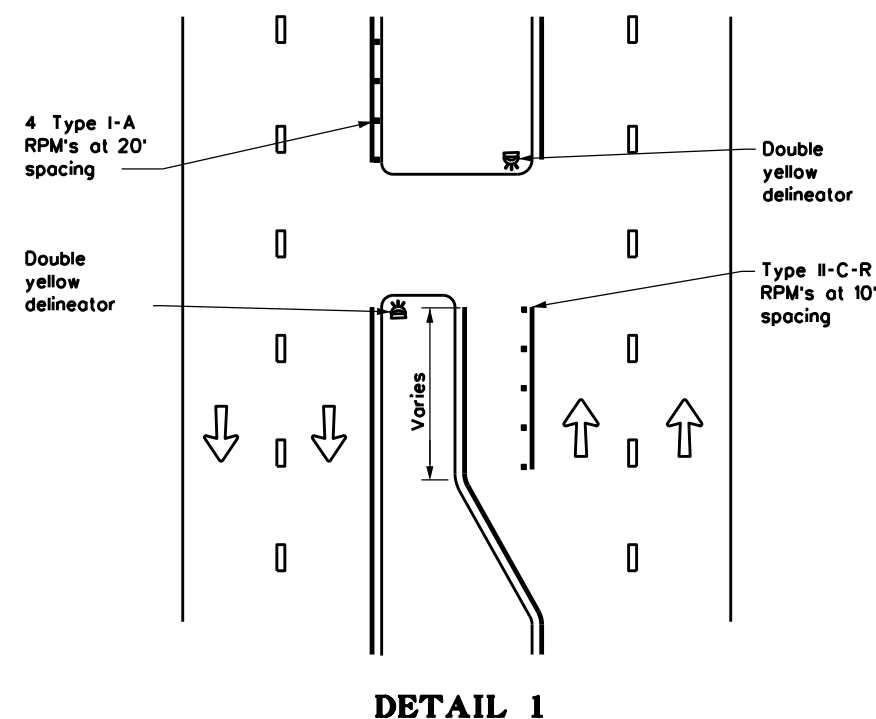


DETAIL 1

FOR CULVERTS WITHOUT MBGF

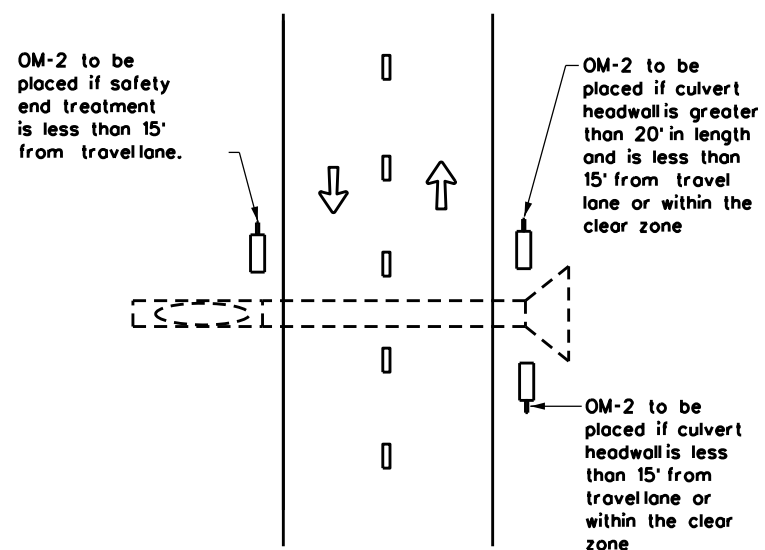


DETAIL 2

FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES

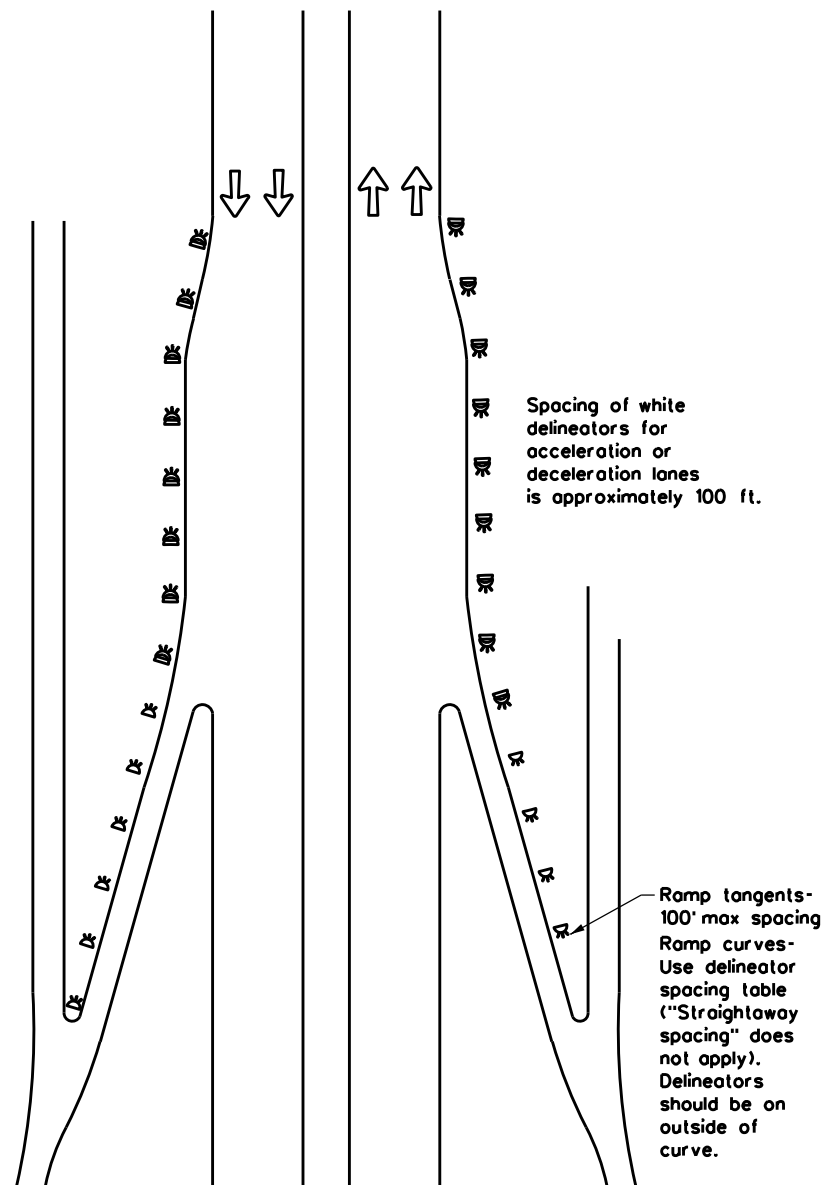


DETAIL 3

TYPICAL APPLICATION OF DEAD END BARRICADE

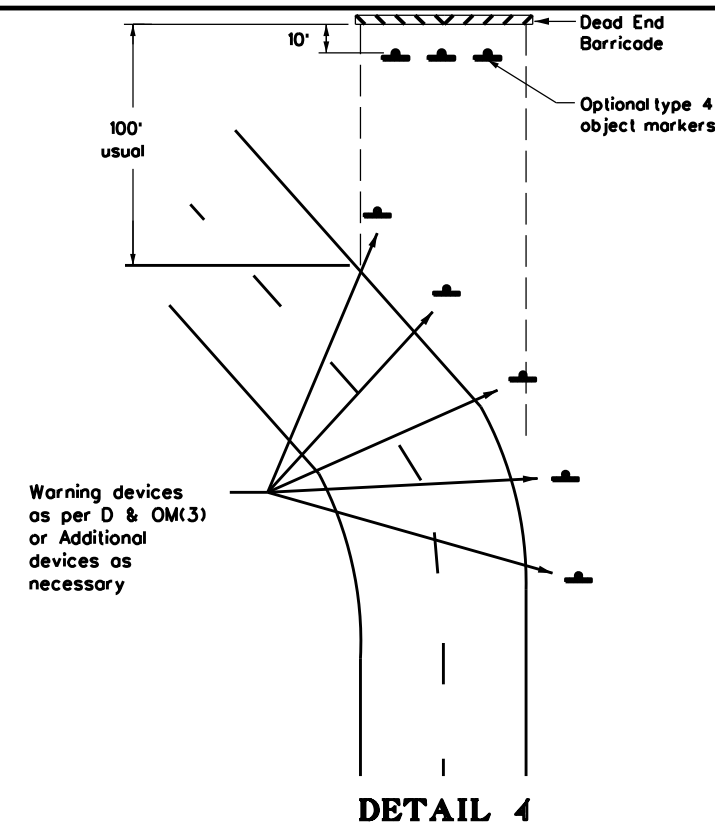

DETAIL 4

TYPICAL DEAD END BARRICADE INSTALLATION

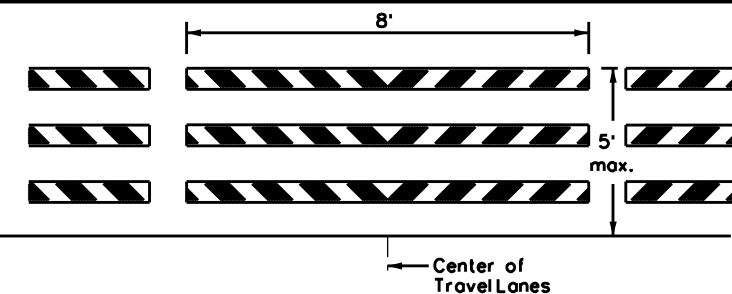

NOTES

- Barricade striping shall be red and white reflective sheeting for all permanent road closures.
- Barricade striping is red and white sloping toward the center of the roadway.
- Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

DETAIL 5

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator



DELINEATOR & OBJECT MARKER PLACEMENT DETAILS


D & OM(4)-20

FILE: dom4-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	01050203, ETC SH 70/86			
3-15	DIST	COUNTY	SHEET NO.	
7-20	CHS	HALL	42	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units or for any results or damages resulting from its use.

DATE: 8/1/2023 10:21:17 PM
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\0105-02-023.dwg


CONTINUOUS CONCRETE OR STEEL BARRIER

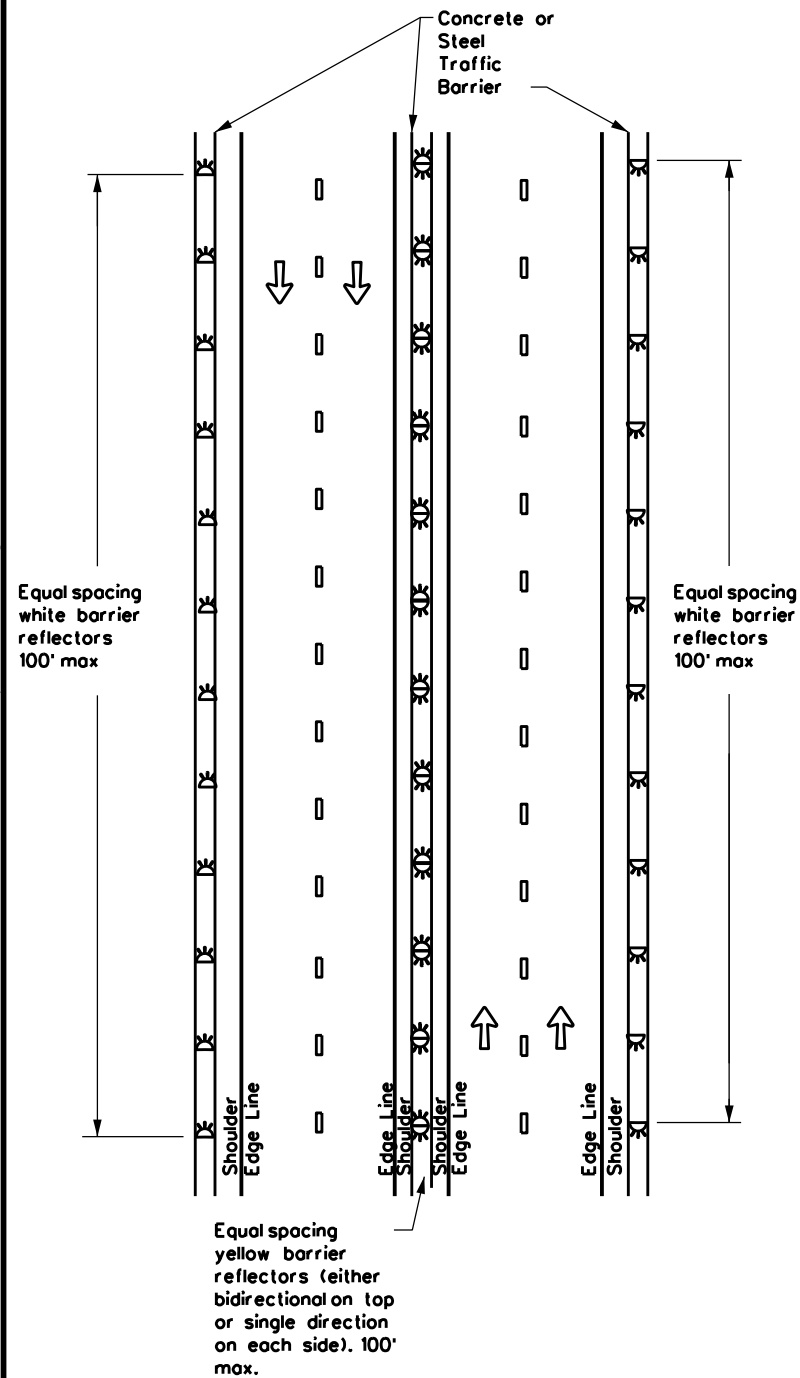


MULTI-LANE UNDIVIDED, TWO-WAY ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

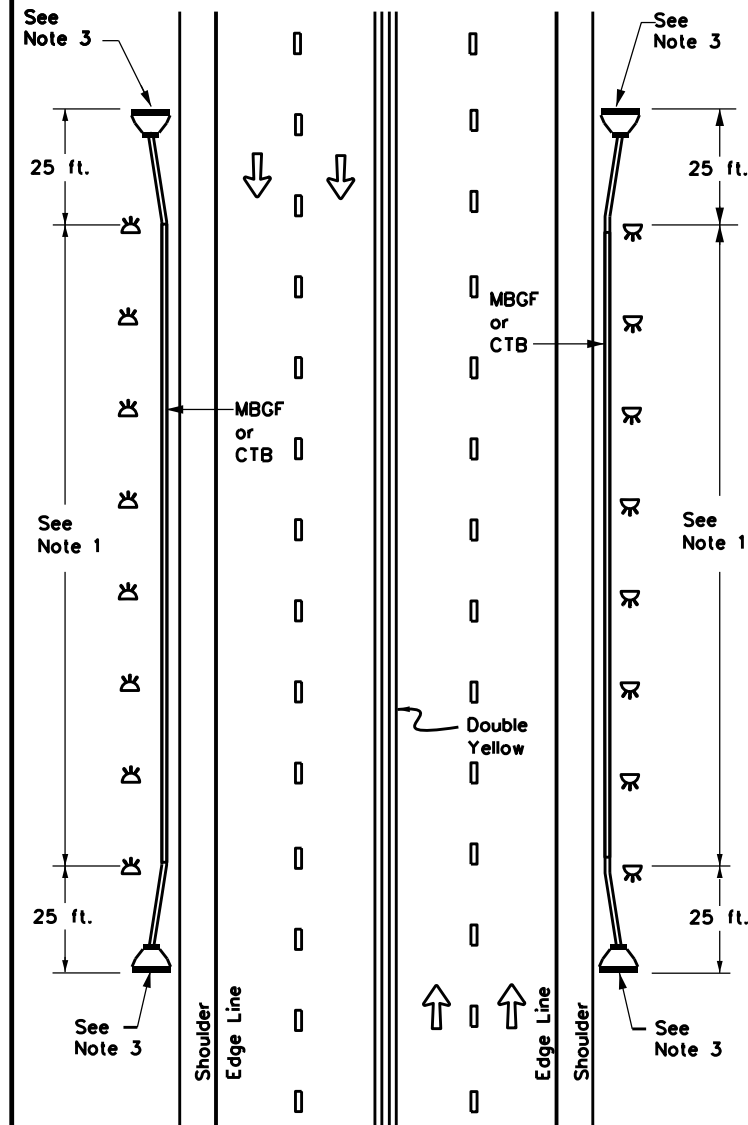

DIVIDED ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

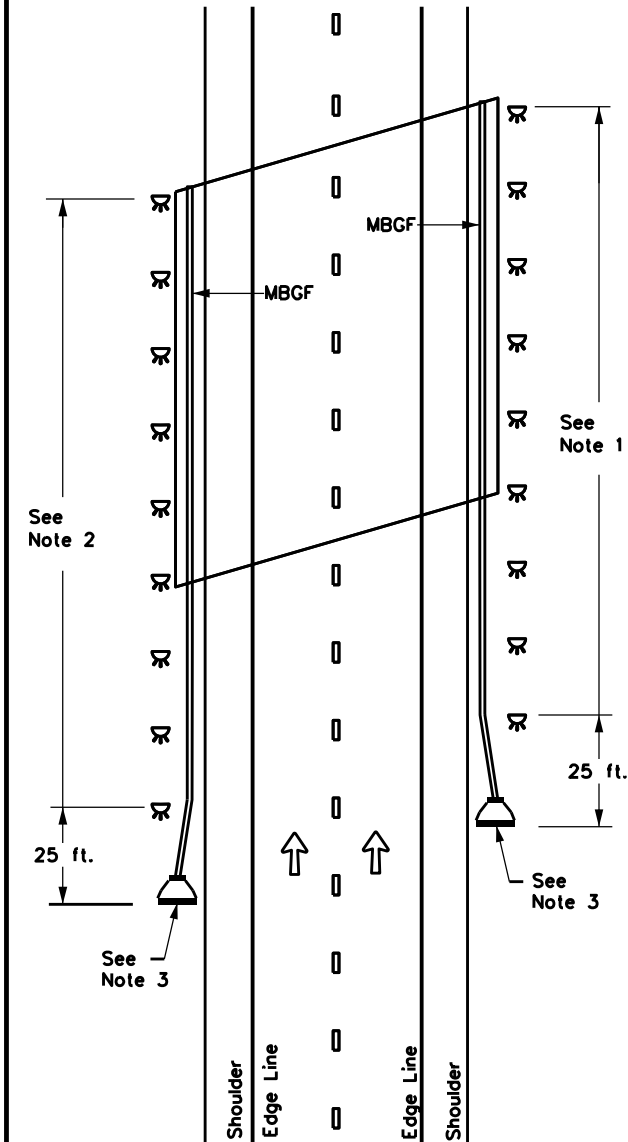

EMERGENCY CROSSOVER

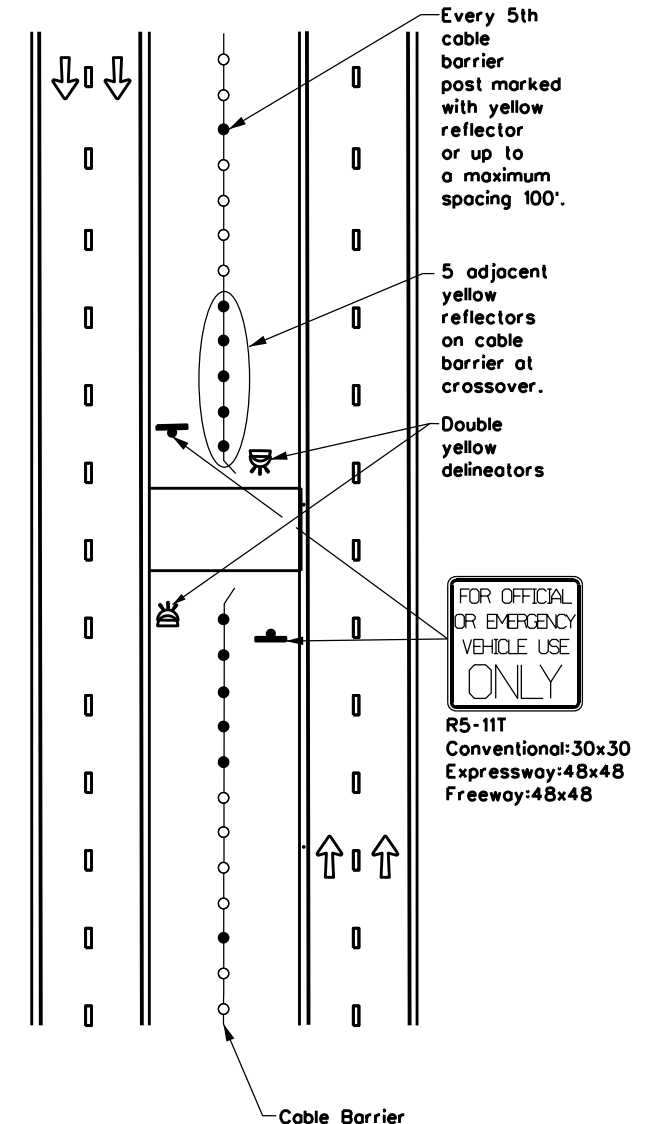

NOTES

1. Equal spacing (100' max), but not less than 3 single directional white barrier reflectors or delineators. On Continuous Barrier, equal spacing (100' max.)
2. Equal spacing (100' max), but not less than 3 single directional yellow barrier reflectors or delineators.
3. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow







DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

D & OM(6)-20


FILE: dom6-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
7-20	DIST	COUNTY	SHEET NO.	
REVISIONS	CHS	HALL	44	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other units or for inaccuracies or damages resulting from its use.



DATE: 8/1/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023\SH 86 Rehab\Plan Sheet\delin\delin.dwg

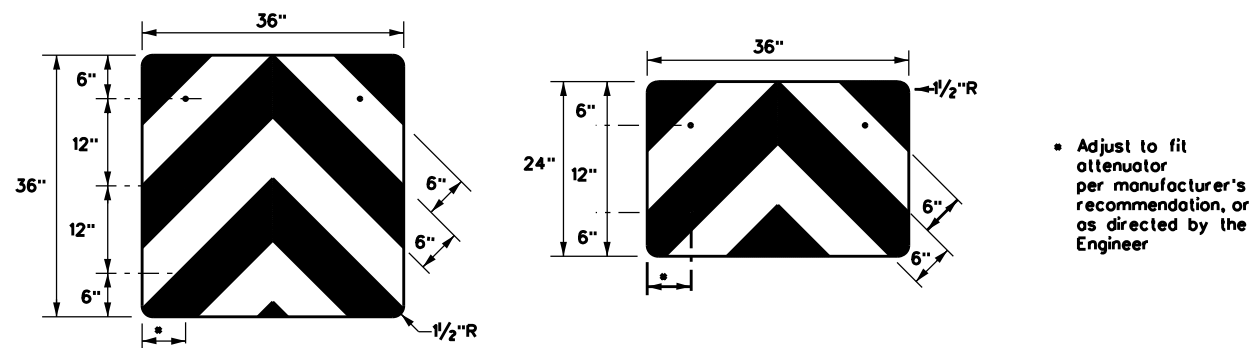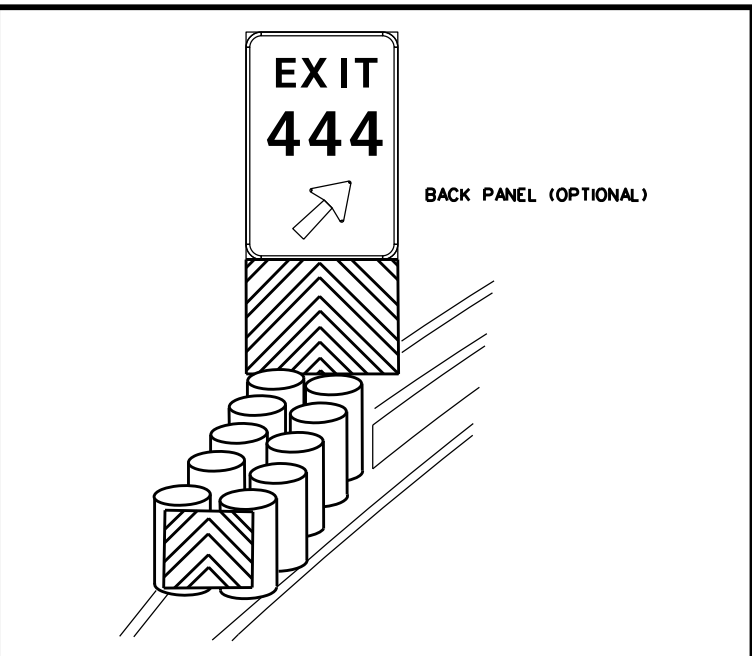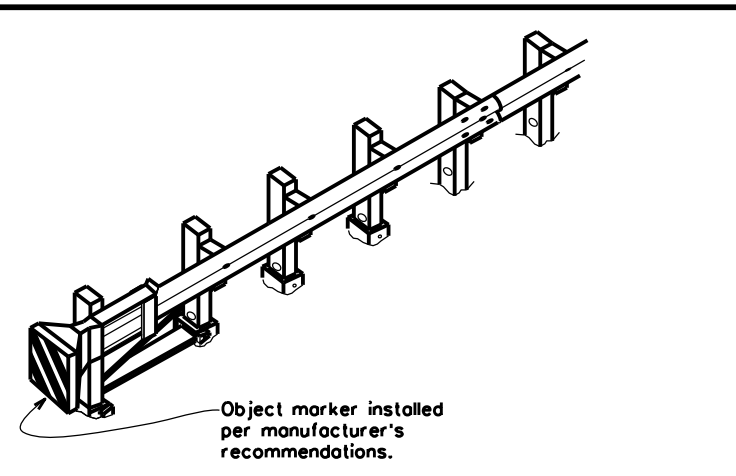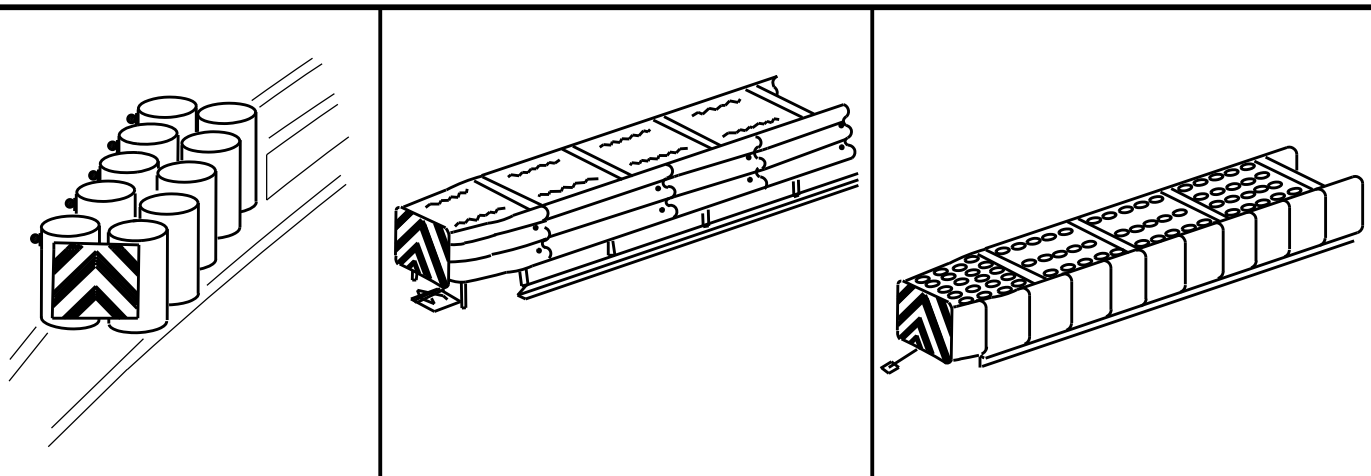

• Adjust to fit attenuator per manufacturer's recommendation, or as directed by the Engineer

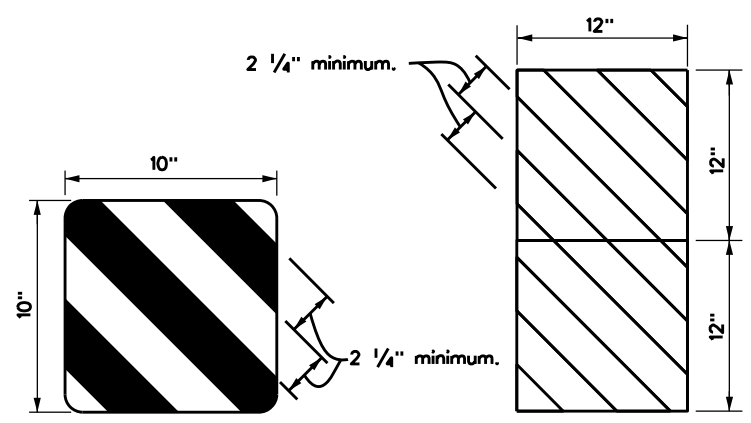

OBJECT MARKERS SMALLER THAN 3 FT²

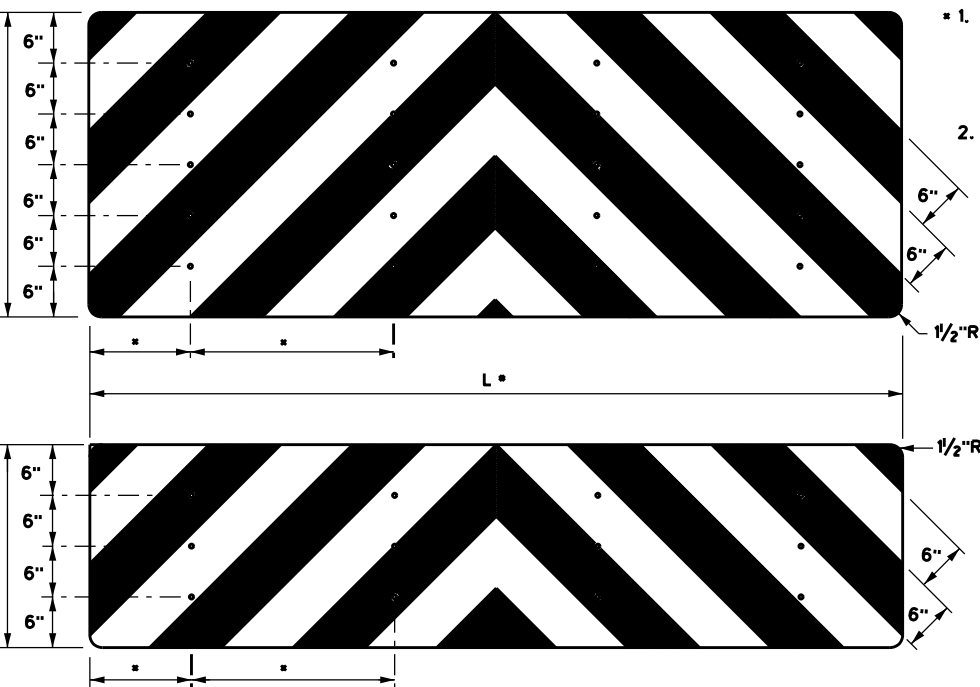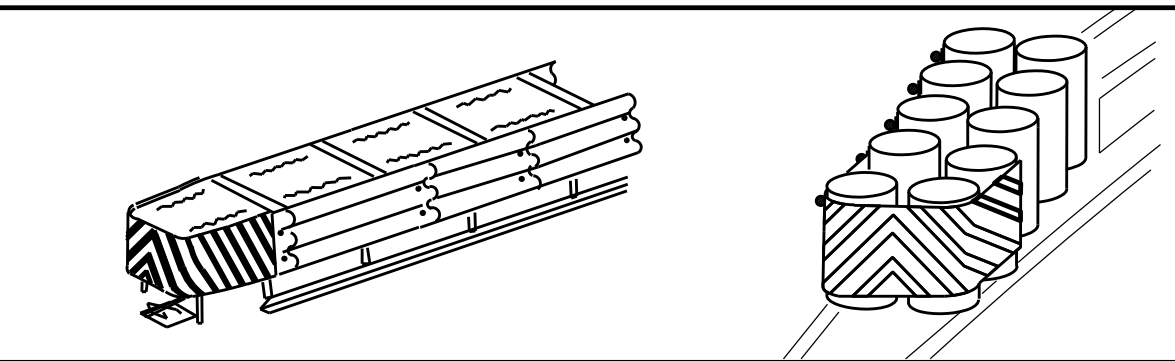

NOTES

1. Spacing should be adjusted to attach through centerline of drum, per attenuator manufacturer's recommendation, or as directed by the Engineer.
2. Mounting should be flush with top of attenuator. Minimum size 96" x 24".


NOTES

1. Object Markers shall conform to the Texas MUTCD and meet the color and reflectivity requirement of Department Material Specification DMS 8300. Background shall be yellow reflective sheeting (Type B or C) and Chevron shall be black.
2. Object Markers may be fabricated from adhesive backed reflective sheeting applied directly to guardrail end treatment, or applied directly to an "end cap" as per the manufacturer's recommendation. Direct applied sheeting shall provide a smooth surface and have no wrinkles, air bubbles, cuts or tears. A radius at the corners is not required for direct applied sheeting.
3. Object Marker size may be reduced to fit smaller devices. Width of alternating black and yellow stripes are typically 6". Object Markers smaller than 3ft may have reduced width stripes of a minimum of 2 1/4".
4. Pop rivets, screws, or nuts and bolts may be used to attach object markers and reflectors. Holes, slots or other openings may be cut or drilled through object markers to allow cable or other attachments.
5. Object Marker at nose of attenuator is subsidiary to the attenuator.
6. See D & OM (1-4) for required barrier reflectors.


		Traffic Safety Division Standard	
DELINEATOR & OBJECT MARKER FOR VEHICLE IMPACT ATTENUATORS D & OM(VIA)-20			
FILE: domvia20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT
© TXDOT December 1989	CONT	SECT	JOB
REVISIONS		HIGHWAY	
4-92 8-04	010502023, ETC.		SH 70/86
8-95 3-15	DIST	COUNTY	SHEET NO.
4-98 7-20	CHS	HALL	45
20G			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 8/1/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Roadway\SSCB210.dgn
 10:28:56 PM

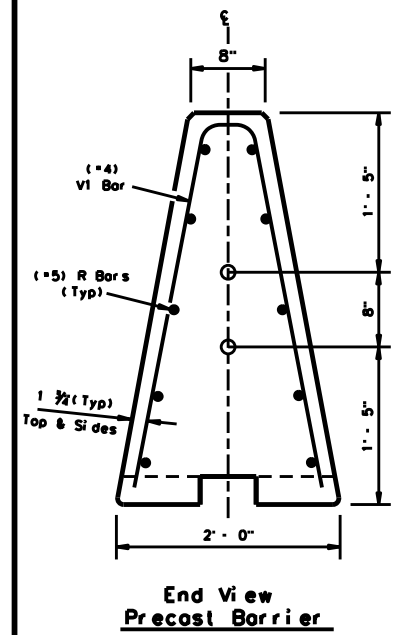


End View Precast Barrier
 Pipe Locations for Joint Type X connection

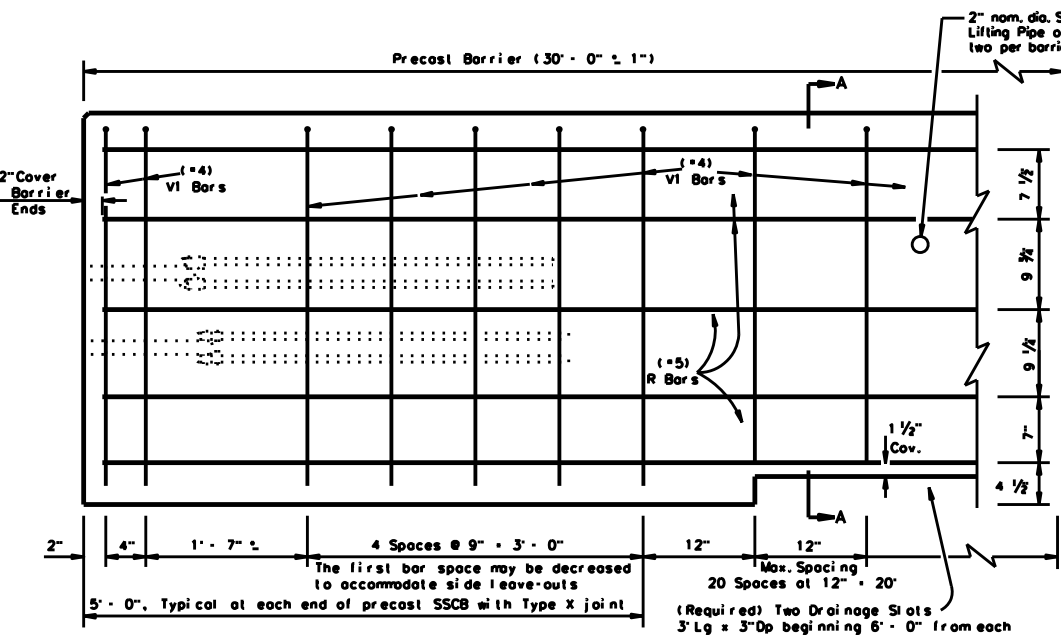


Reinforcement for Precast (SSCB) Single Slope Concrete Barrier (Type 1)
 Showing reinforcement for Joint Connection (Type X)

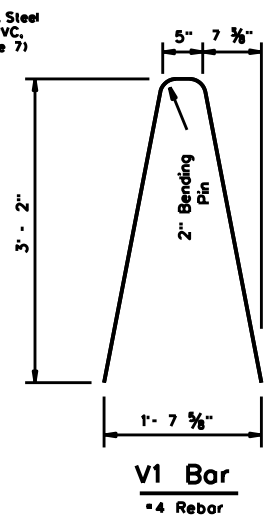

V1 Bar
 = 4 Rebar
 Note: V1 Bars above the drainage slots may be bent to accommodate 1 1/2 inch clear cover as directed by the Engineer.

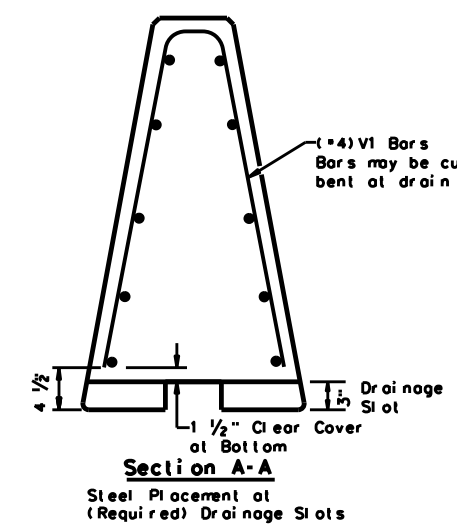


Section A-A
 Steel Placement at (Required) Drainage Slots

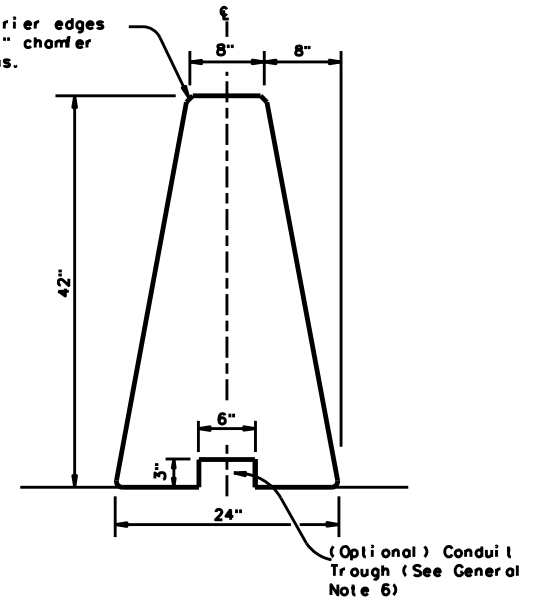


All precast barrier edges shall have a 3/4 inch chamfer or looted radius.


Single Slope Concrete Traffic Barrier
 Precast SSCB barrier may be connected to cast-in-place SSBC. The joint connection "Types" may be used in the cast-in-place barrier, to match the precast barrier connection.

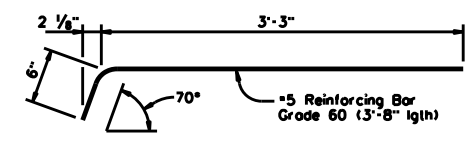


DEFORMED BAR ANCHOR DETAILS
 Two (2) Bars required per assembly. Eight (8) required per joint.

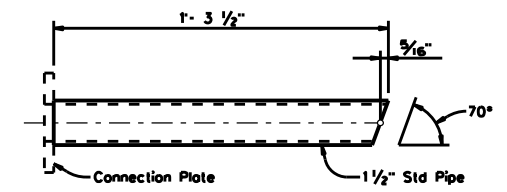


UPPER CONNECTION PIPE DETAILS
 One (1) Steel Pipe required per Upper Assembly. Two (2) required per joint.

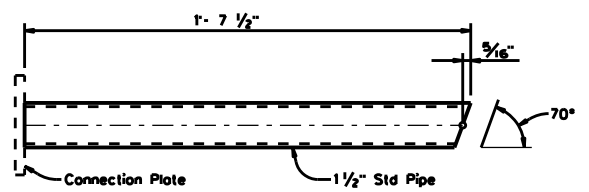


LOWER CONNECTION PIPE DETAILS
 One (1) Steel Pipe required per Lower Assembly. Two (2) required per joint.

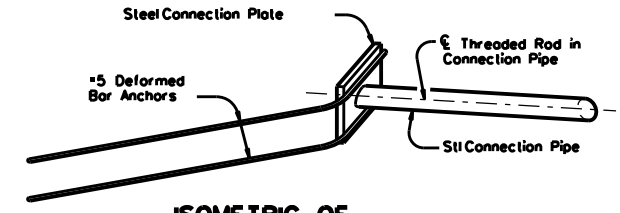


ISOMETRIC OF TYPICAL WELDED ASSEMBLY
 Four (4) [2 Upper & 2 Lower] Assemblies required per joint.

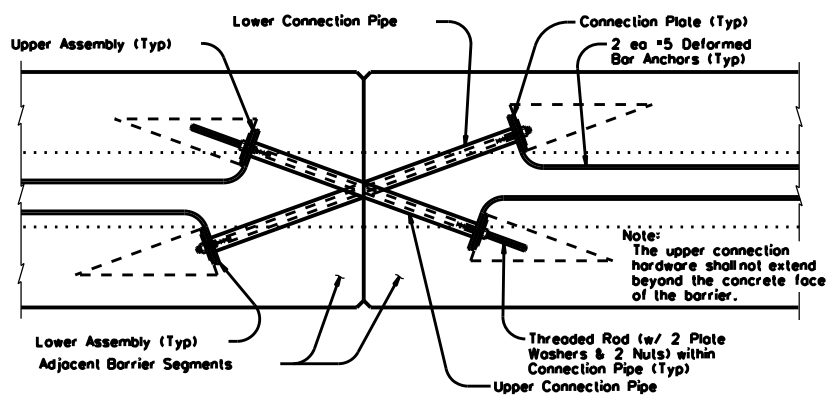

TYPE X JOINT INSTALLATION DETAIL
 Barrier reinforcing and Type X Joint Leave-Out dimensions not shown for clarity.

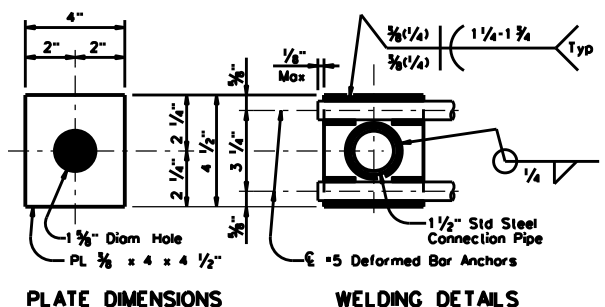


CONNECTION PLATE DETAILS
 One (1) Plate required per assembly. Four (4) required per joint. All steel fittings for joint Type X shall be galvanized after fabrication in accordance with Item 445.

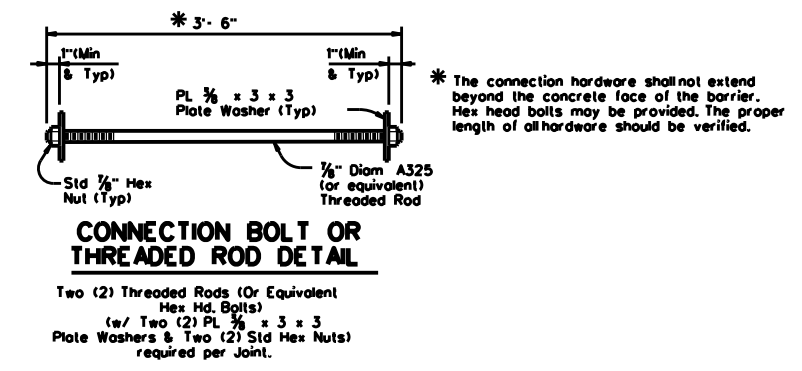

CONNECTION BOLT OR THREADED ROD DETAIL
 Two (2) Threaded Rods (Or Equivalent Hex Hd. Bolts) (w/ Two (2) PL 3/8 x 3 x 3 Plate Washers & Two (2) Std Hex Nuts) required per joint.


* The connection hardware shall not extend beyond the concrete face of the barrier. Hex head bolts may be provided. The proper length of all hardware should be verified.

Weight of one precast 30 ft. (SSCB) segment = Approx. 10.5 Tons or 717 lbs per ft.

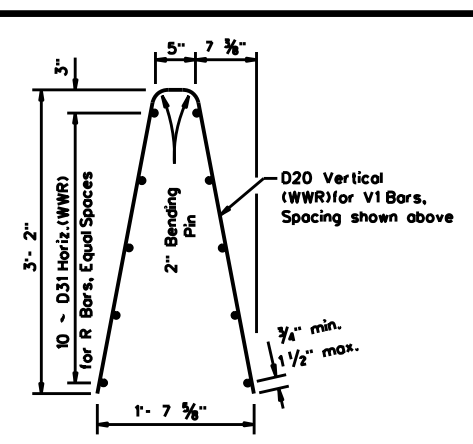

Welded Wire Reinforcement (WWR) Option for Bars R and V1

- (WWR) General Notes**
- Deformed Welded Wire Reinforcement (WWR) shall conform to ASTM A497.
 - Welded wire cage may be cut or bent to accommodate the Type X joint connection and drainage slots, as directed by the Engineer.
 - All reinforcement shall comply with Item 440, "Reinforcing Steel."
 - Combinations of reinforcing steel and WWR will be permitted, as directed by the Engineer. The dimension from the end of the barrier section to the first wire shall not exceed 3".

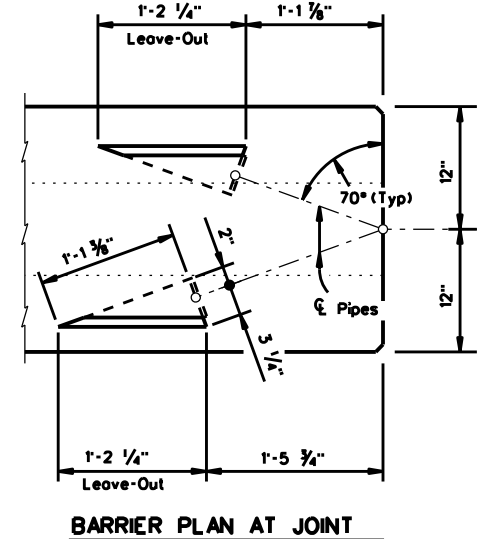


BARRIER PLAN AT JOINT

General Notes


- Concrete shall be Class H with a minimum compressive strength of 3,600 psi.
- Where used, rebar reinforcement shall be Grade 60 and conform to ASTM A615.
- Precast barrier length shall be 30 ft. unless otherwise specified on the plans.
- All precast barrier edges shall have a 3/4 inch chamfer or a looted radius.
- All concrete, reinforcement, joint connection systems, grout etc. as shown, are considered as part of the barrier payment.
- Conduit trough when required shall be shown elsewhere on the plans, or as directed by the Engineer.
- Regardless of the method of handling, barrier lifting points shall be approx. 7.5 feet from the ends of the barrier. Lifting devices and attachments to barrier sections shall be approved by the Engineer.
- Surface finishing and grouting (where required) shall be two parts sand one part cement with enough water to make the mixture plastic. Grouting shall be done in a manner that will assure a smooth surface. Surface finishing shall be considered subsidiary to the various bid items.
- All steel assemblies shall be galvanized after fabrication in accordance with Item 445, "Galvanizing."

		Design Division Standard	
SINGLE SLOPE CONCRETE BARRIER PRECAST BARRIER (TYPE 1) SSCB(2)-10			
FILE: sscb210.dgn	DN: TxDOT	CK: AM	DW: BD
© TxDOT December 2010	CONT: 010502023, ETC.	SECT: HIGHWAY	SH 70/86
REVISIONS:	DIST: CHS	COUNTY: HALL	SHEET NO.: 46


DATE: 8/1/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Roadway\sscb210.dgn
 10:30:22 PM
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

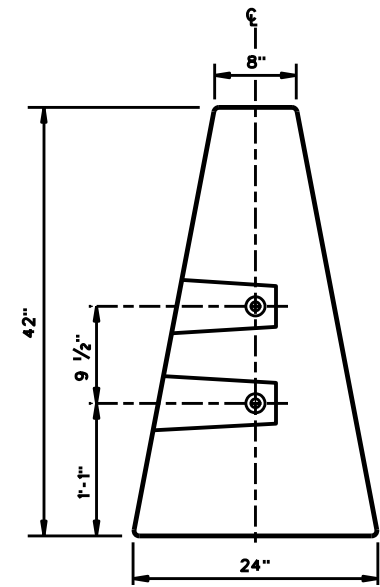

END VIEW
"QUICK-BOLT" POCKET LOCATIONS

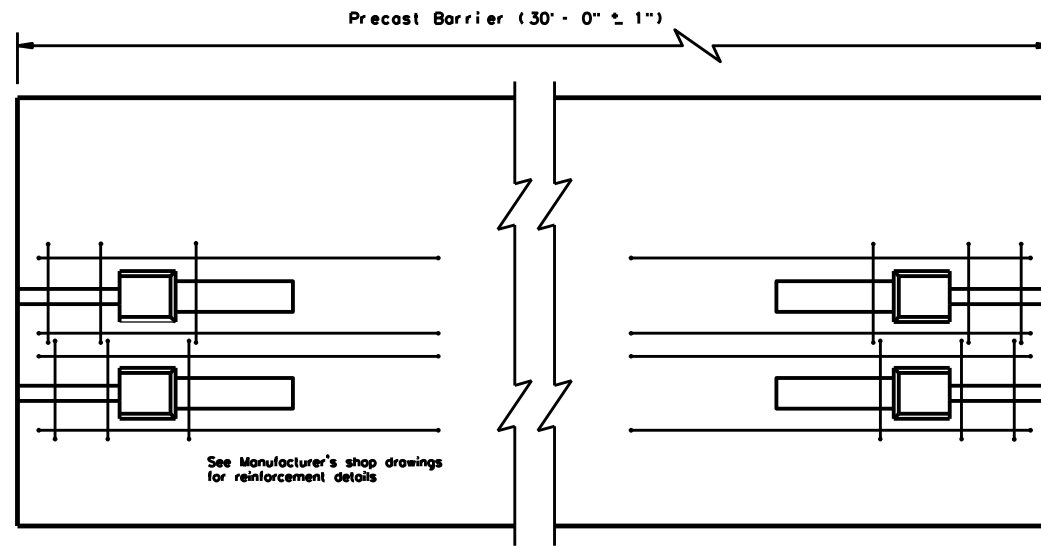


ELEVATION VIEW
"QUICK-BOLT" (SSCB)
See Manufacturer's shop drawing for additional details

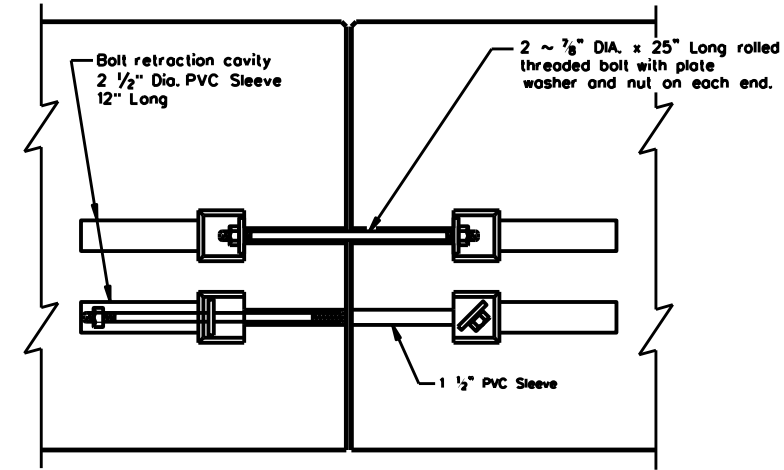


ELEVATION VIEW SHOWING JOINT CONNECTION
"QUICK-BOLT"


Joint Connection (Type Q)

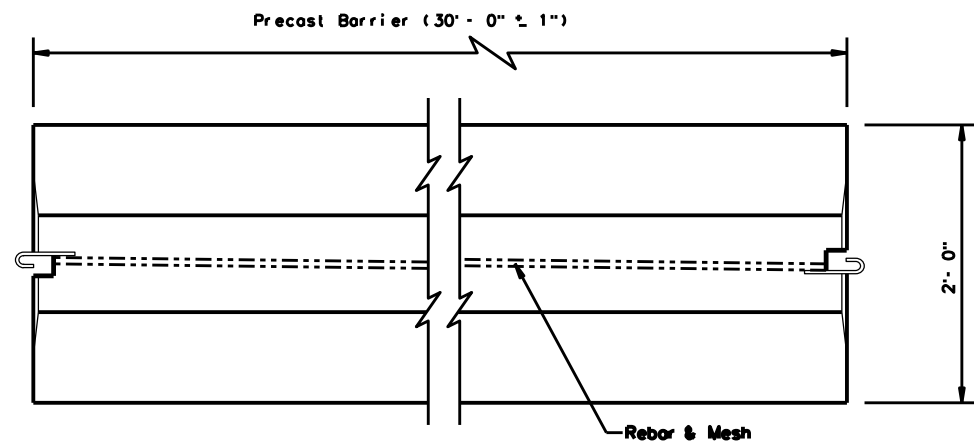

TOP VIEW
PRECAST (SSCB) WITH J-J HOOKS
See Manufacturer's shop drawing for additional details

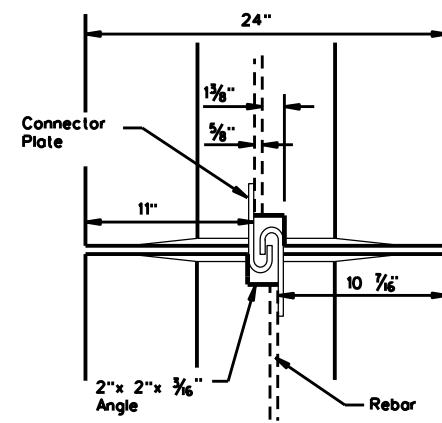

VIEW FROM ABOVE
J-J HOOK CONNECTION

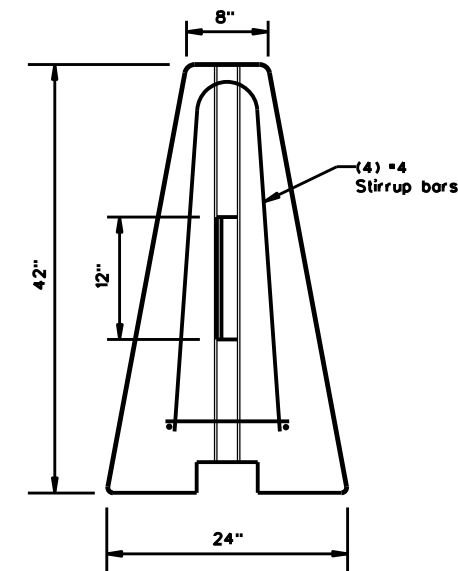


END VIEW

Proprietary Joint Connections (SSCB)


Two proprietary joint connections are acceptable as alternates to the (Type X) connection shown, here on. These joint connections types are:

J-J Hooks by Easi-Set Industries, (800)547-4045
 Quick-Bolt by Bexor Concrete, (210)497-3773


If one of these connection systems are exclusively specified in the plans, prior approval for sole source use must be obtained. Details of the connection components and barrier reinforcement for these systems, will be shown on the manufacturer's shop drawing(s) furnished to the Engineer.

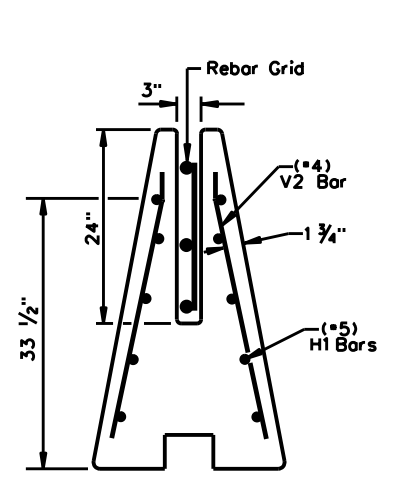


SECTION A-A
Showing (Type R)
Rebar Grid

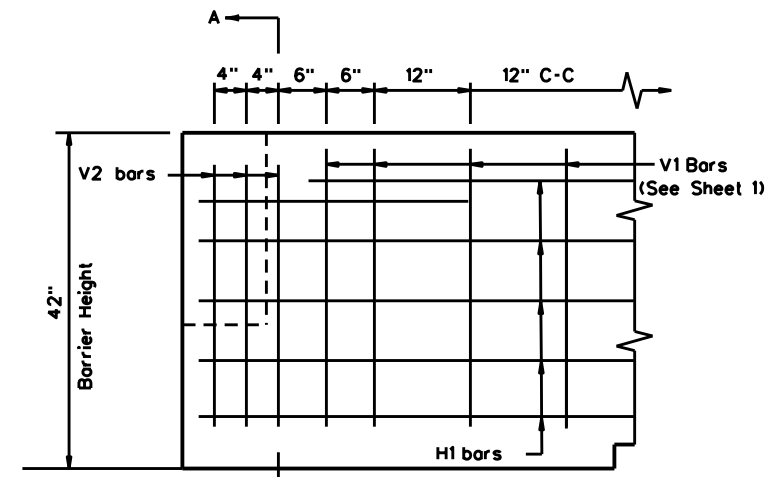


ELEVATION
V1 Bars (See Sheet 1)

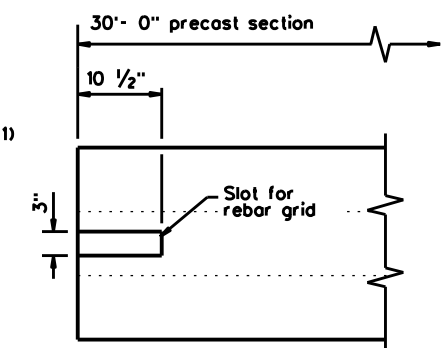

TOP VIEW
JOINT CONNECTION
Typical at both ends of barrier segment



(4) V2 BARS
6 - two piece bars per barrier segment

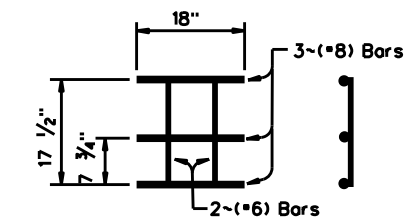

WELDED REBAR GRID


Joint Connection (Type R)

SINGLE SLOPE CONCRETE BARRIER
PRECAST BARRIER (TYPE 1)
SSCB(2)-10


FILE: sscb210.dgn	DN: TxDOT	CK: AM	DW: VP	CK:
©TxDOT December 2010	CONT	SECT	JOB	HIGHWAY
REVISIONS	010502023, ETC.		SH 70/86	
DIST	COUNTY	SHEET NO.		
CHS	HALL	47		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/1/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Roadway\sled19.dgn

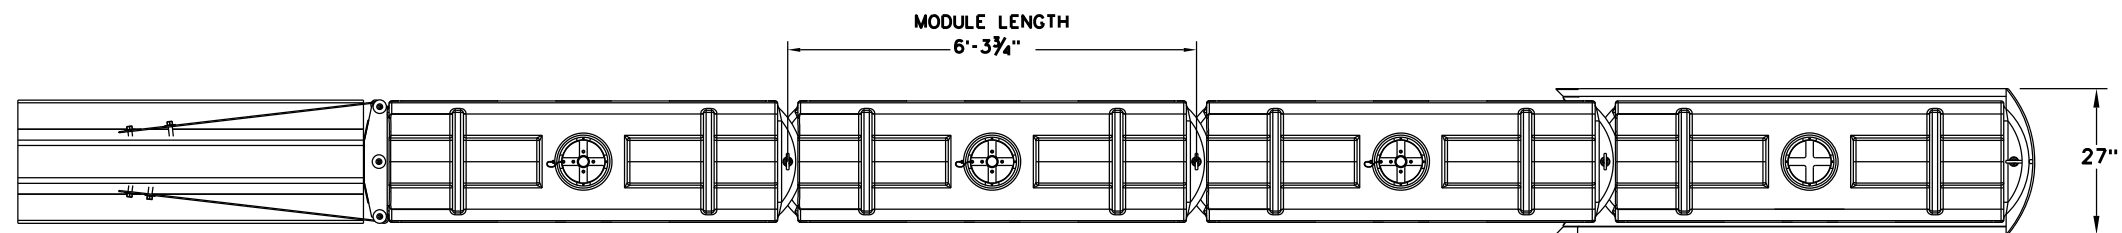

PLAN VIEW

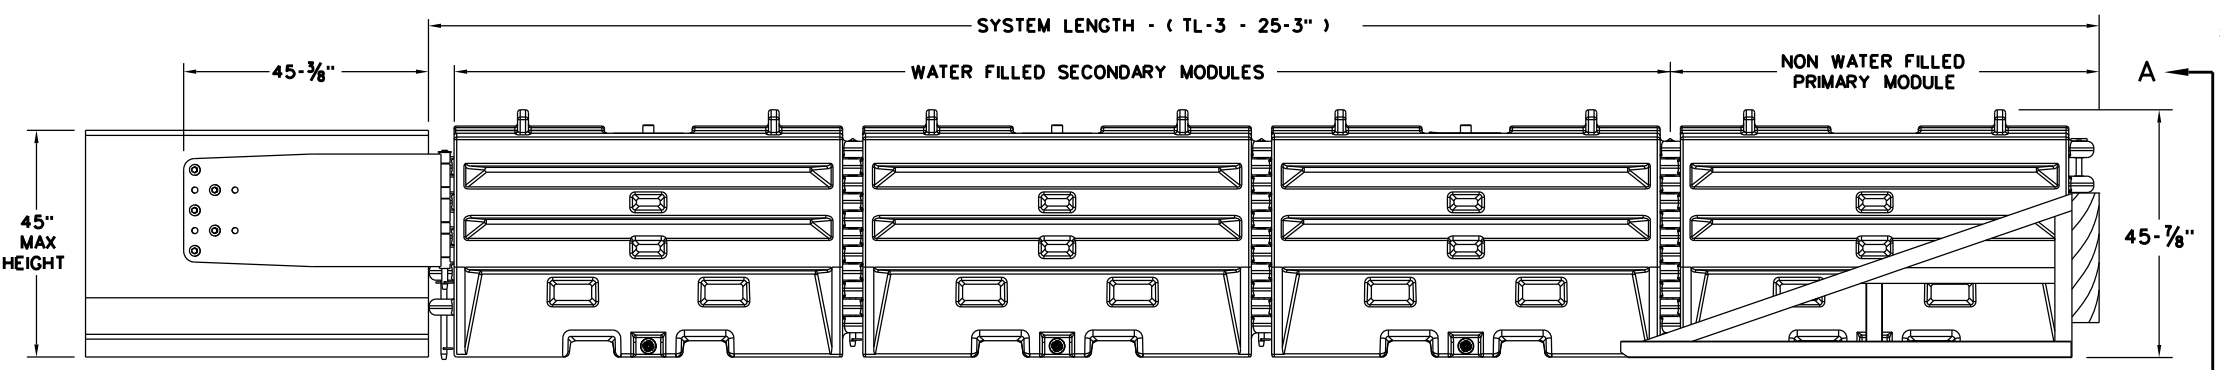


ELEVATION VIEW

GENERAL NOTES

1. REFER TO THE INSTALLATION MANUAL FOR SPECIFIC SYSTEM ASSEMBLY AND MODULE ORIENTATION. FOR ADDITIONAL INFORMATION, CONTACT TRAFFIX, INC. AT (949) 361-5663.
2. THE SLED SYSTEM IS A MASH APPROVED TEST LEVEL 3 (TL-3) CRASH CUSHION APPROVED FOR USE IN TEMPORARY WORK ZONES. THE SLED SYSTEM IS A NON-REDIRECTIVE, GATING CRASH CUSHION THAT DOES NOT NEED TO BE ATTACHED TO THE GROUND AND CAN BE INSTALLED ON CONCRETE, ASPHALT, GRAVEL OR COMPACTED SOIL.
3. MAXIMUM PERMISSIBLE CROSS SLOPE IS 8° (DEGREES)(14%).
4. THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
5. THE SLED SYSTEM CAN BE ATTACHED TO:

- CONCRETE BARRIER, TEMPORARY OR PERMANENT, 45" MAXIMUM HEIGHT
- STEEL BARRIER
- PLASTIC BARRIER
- CONCRETE BRIDGE ABUTMENTS
- W-BEAM GUARD RAIL
- THRIE BEAM GUARD RAIL

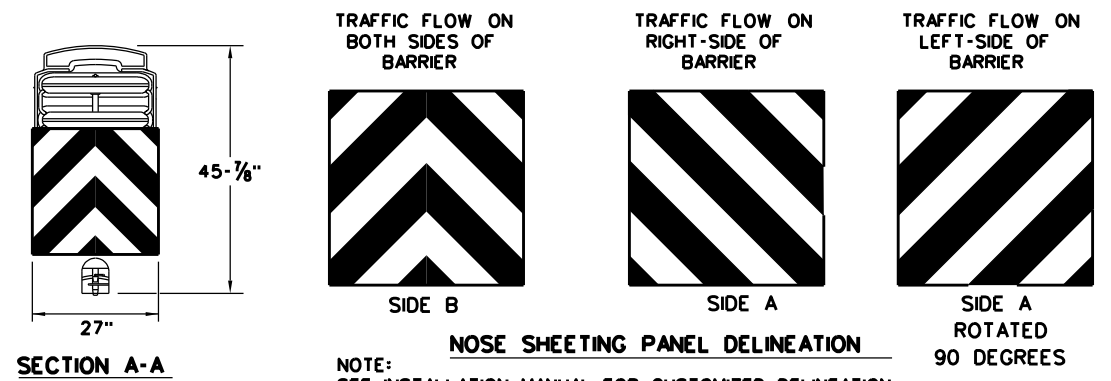

NOSE SHEETING PANEL DELINEATION

NOTE: SEE INSTALLATION MANUAL FOR CUSTOMIZED DELINEATION NOSE SHEETING FOR DECAL PLACEMENT.


TEST LEVEL	NUMBER OF SECONDARY MODULES	SYSTEM LENGTH
TL-3	3	25' 3"

BILL OF MATERIAL

PART NUMBER	DESCRIPTION	QTY:TL-3
45131	TRANSITION FRAME,GALVANIZED	1
45150	TRANSITION PANEL,GALVANIZED	2
45147-CP	TRANSITION SHORT DROP PIN W/ KEEPER PIN, GALVANIZED	2
45148-CP	TRANSITION LONG DROP PIN W/ KEEPER PIN, GALVANIZED	1
45050	ANCHOR BOLTS	9
12060	WASHER, 3/4" ID X 2" OD	9
45044-Y	SLED YELLOW WATER FILLED MODULE	3
45044-YH	SLED YELLOW "NO FILL" MODULE	1
45044-S	CIS (CONTAINMENT IMPACT SLED), GALVANIZED	1
45043-CP	T-PIN W/ KEEPER PIN	4
18009-B-1	FILL CAP W/ "DRIVE BY" FLOAT INDICATOR	3
45033-RC-B	DRAIN PLUG	3
45032-DPT	DRAIN PLUG REMOVAL TOOL	1

TRANSITION OPTIONS

SLED TRANSITION TO CONCRETE TRAFFIC BARRIER (TEMPORARY OR PERMANENT)
SLED TRANSITION TO STEEL TRAFFIC BARRIER (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO PLASTIC TRAFFIC BARRIER (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO W-BEAM OR THRIE BEAM GUARD RAIL (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO CONCRETE BRIDGE ABUTMENT

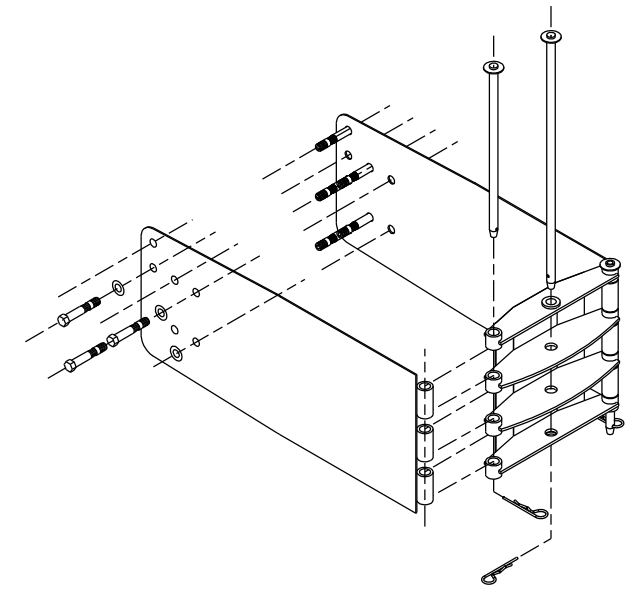

SLED TRANSITION COMPONENTS FOR ATTACHMENT TO CMB

NOTE: SEE MANUFACTURER'S INSTALLATION MANUAL FOR FURTHER DETAILS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE SLED, IT IS NOT INTENDED TO REPLACE THE INSTALLATION INSTRUCTIONS MANUAL.

SACRIFICIAL





SLED CRASH CUSHION TL-3 MASH COMPLIANT (TEMPORARY, WORK ZONE) SLED-19

FILE: sled19.dgn	DN: TxDOT	CK: KM	DW: VP	CK:
© TxDOT: DECEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105 02023, ETC, SH 70/86			
DIST	COUNTY	SHEET NO.		
CHS	HALL	48		

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE:
FILE:

SYSTEM SHOWN - ABSORB-M TL-3

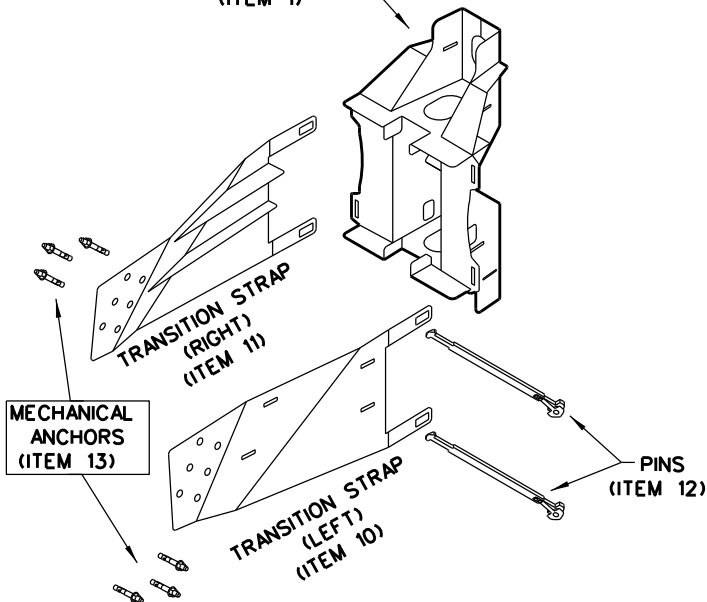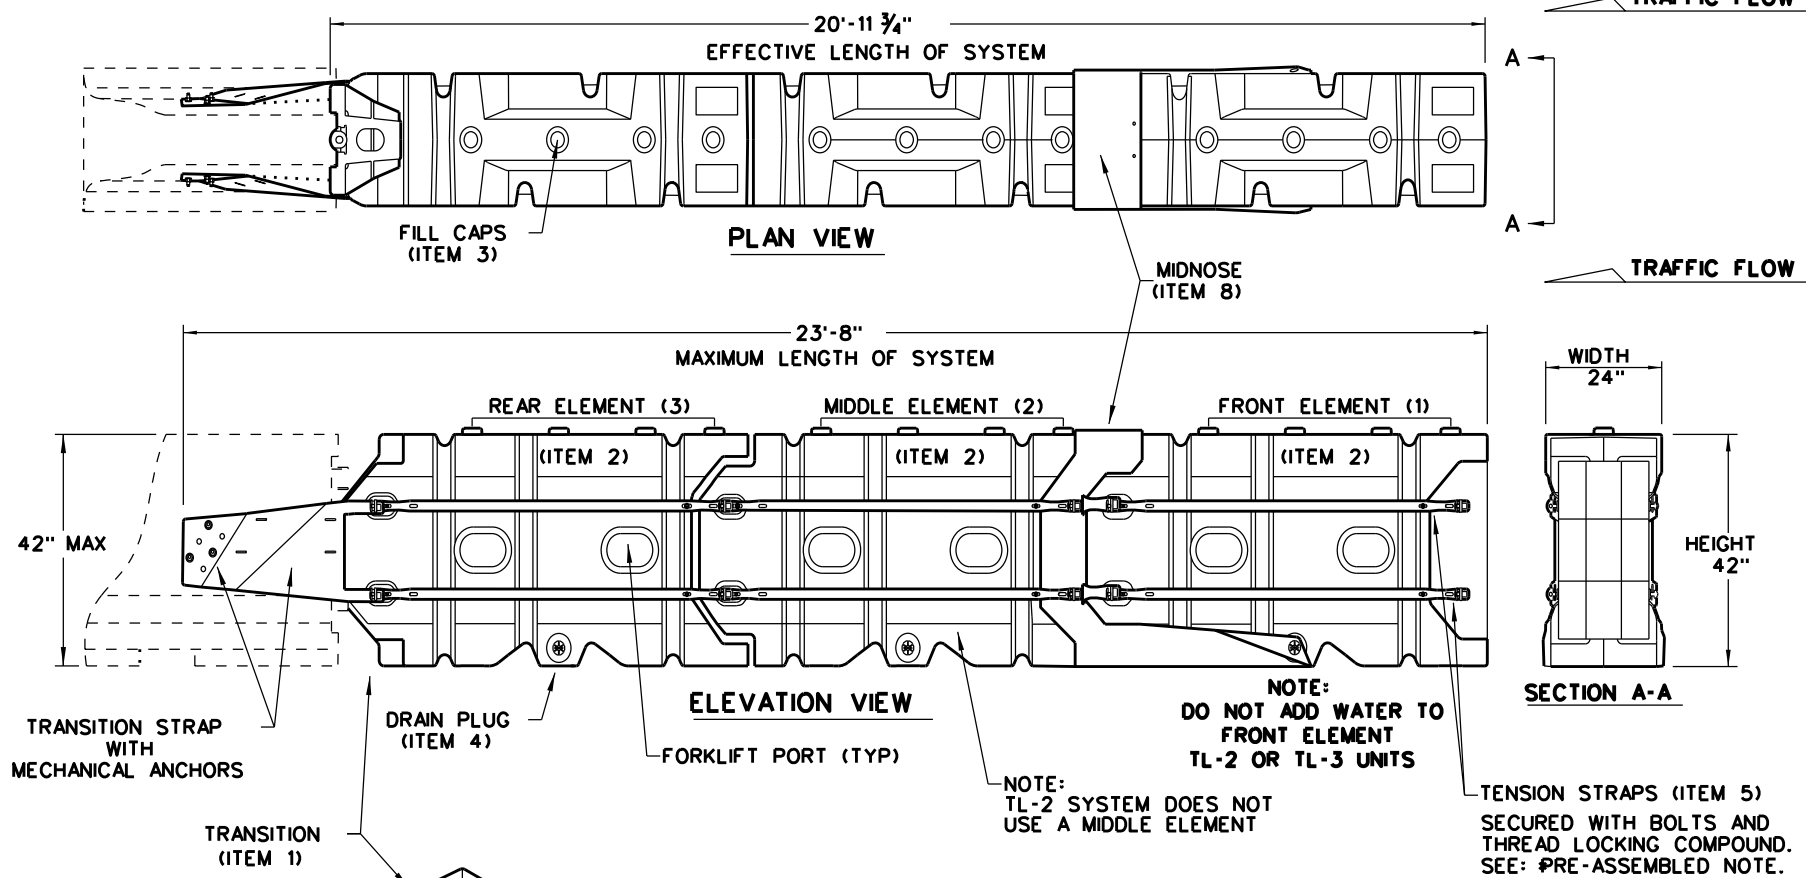


THE ABSORB-M IS A NON-REDIRECTIVE, GATING, CRASH CUSHION DESIGNED TO MEET THE LATEST TL-3 & TL-2 MASH REQUIREMENTS.

THE SYSTEM IS DESIGNED TO ACCOMMODATE A VARIETY OF F-SHAPE AND SINGLE SLOPE CONCRETE BARRIERS. CONTACT THE MANUFACTURER FOR GUIDANCE REGARDING OTHER ALLOWABLE SHAPES.

TEST LEVEL	NUMBER OF ELEMENTS	EFFECTIVE LENGTH	MAXIMUM LENGTH
TL-2	2	14'- 7 3/4"	17'- 4"
TL-3	3	20'- 11 3/4"	23'- 8"

NOTE: CROSS SLOPES OF UP TO 8% (OR 1:12 SLOPE) CAN BE ACCOMMODATED WITH STANDARD HARDWARE SHOWN WITHIN THE INSTRUCTIONS MANUAL. FOR SLOPES WITH EXCESS OF 8% (OR 1:12) CONTACT, LINDSAY TRANSPORTATION SOLUTIONS.

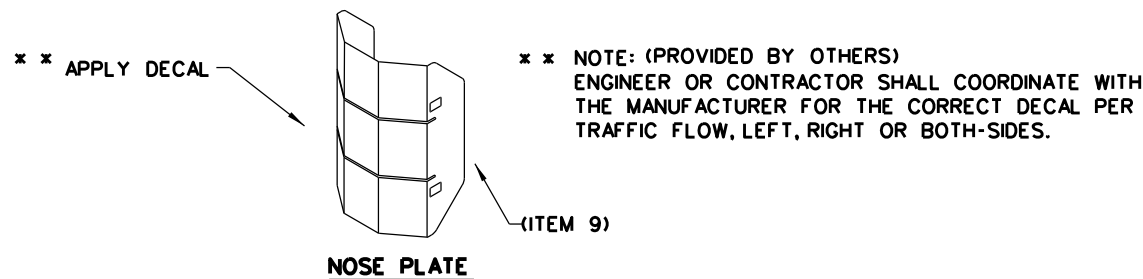


NOTE: APPLY A HIGH REFLECTIVE DECAL TO THE NOSE PLATE. DELINEATION DECAL ORIENTATION IS SHOWN ON THE CONSTRUCTION PLAN SET AND SHALL BE IN ACCORDANCE WITH THE TEXAS MUTCD FOR (TRAFFIC CONTROL DEVICES). DECALS ARE AVAILABLE FOR TRAFFIC FLOW ON THE LEFT-SIDE, BOTH -SIDES AND RIGHT-SIDE.

GENERAL NOTES

- FOR SPECIFIC INFORMATION REGARDING THE INSTALLATION AND TECHNICAL GUIDANCE, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800, 180 RIVER ROAD, RIO VISTA, CA 94571
- THE ABSORB-M SYSTEM IS ONLY APPROVED FOR USE IN (TEMPORARY WORK ZONE) LOCATIONS.
- THE ABSORB-M IS A WATER FILLED NON-REDIRECTIVE, GATING CRASH CUSHION THAT DOES NOT NEED TO BE ATTACHED TO A FOUNDATION AND CAN BE INSTALLED ON TOP OF CONCRETE, ASPHALT, OR ANY SURFACE CAPABLE OF BEARING THE WEIGHT OF THE SYSTEM.
- MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%.
- THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE ABSORB-M SHOULD BE LOCATED APPROXIMATELY PARALLEL WITH THE BARRIER.
- THE USE OF THE ABSORB-M IS RESTRICTED TO A BARRIER HEIGHT OF UP TO 42 INCHES.
- DO NOT ADD WATER TO FRONT ELEMENT (TL-2 OR TL-3 UNIT).

BILL OF MATERIALS (BOM) ABSORB-M TL-3 & TL-2 SYSTEMS			QTY	QTY
ITEM #	PART NUMBER	PART DESCRIPTION	TL-2 SYSTEM	TL-3 SYSTEM
1	BSI-1809036-00	TRANSITION-(GALV)	1	1
2	BSI-1808002-00	PRE-ASSEMBLED ABSORBING (ELEMENTS)	2	3
3	BSI-4004598	FILL CAPS	8	12
4	BSI-4004599	DRAIN PLUGS	2	3
5	BSI-1809053-00	TENSION STRAP-(GALV)	8	12
6	BSI-2001998	C-SCR FH 3/8-16 X 1 1/2 GR5 PLT	8	12
7	BSI-2001999	C-SCR FH 3/8-16 X 1 GR5 PLT	8	12
8	BSI-1809035-00	MIDNOSE-(GALV)	1	1
9	BSI-1808014-00	NOSE PLATE	1	1
10	BSI-1809037-00	TRANSITION STRAP (LEFT-HAND)-(GALV)	1	1
11	BSI-1809038-00	TRANSITION STRAP (RIGHT-HAND)-(GALV)	1	1
12	BSI-1808005-00	PIN ASSEMBLY	8	10
13	BSI-2002001	ANC MECH 5/8-11X5 (GALV)	6	6
14	ABSORB-M	INSTALLATION AND INSTRUCTIONS MANUAL	1	1

* COMPONENTS PRE-ASSEMBLED WITH ELEMENT ASSEMBLY

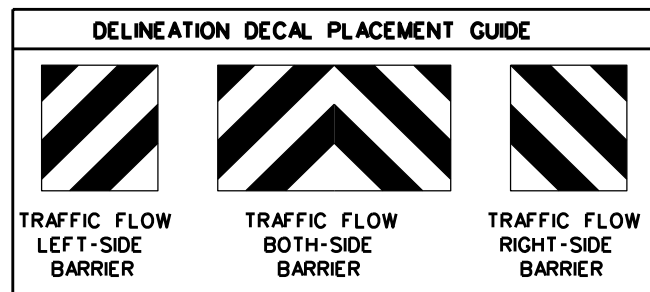

SACRIFICIAL


Design
Division
Standard

**LINDSAY TRANSPORTATION SOLUTIONS
CRASH CUSHION
(MASH TL-3 & TL-2)
TEMPORARY - WORK ZONE
ABSORB(M)-19**


FILE: absorbm19	DN: TxDOT	CK: KM	DW: VP	CK:
© TxDOT: JULY 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105	02	023, ETC.	SH 70/86
	DIST	COUNTY	SHEET NO.	
	CHS	HALL	48A	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

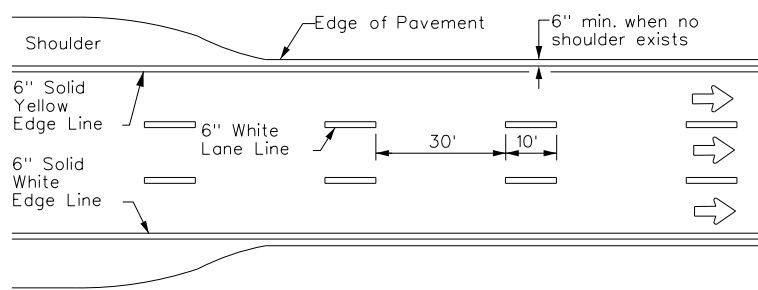

**EDGE LINE AND LANE LINES
ONE-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

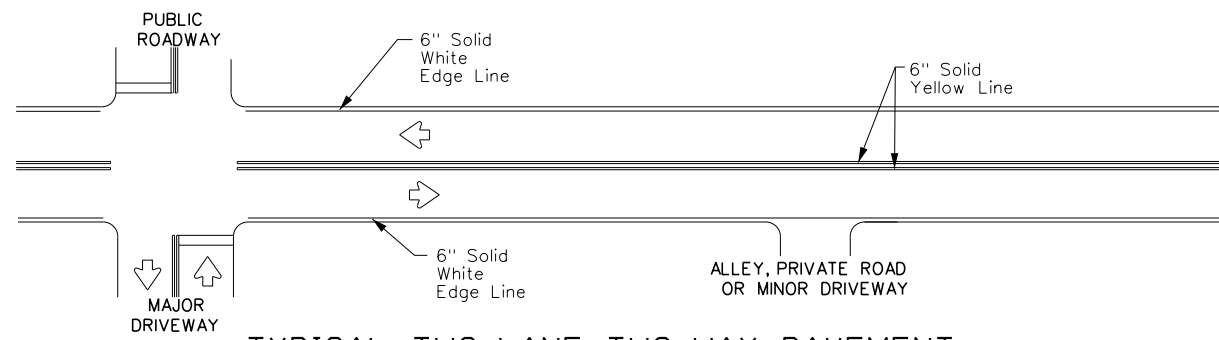


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

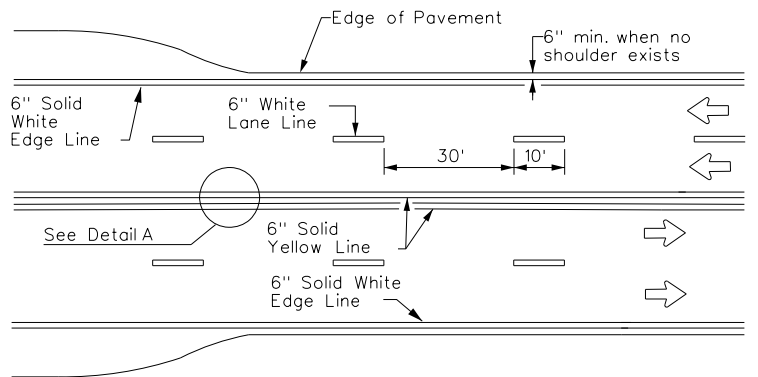


**CENTERLINE AND LANE LINES
FOUR LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**


* 2" minimum for restripe projects when approved by the Engineer.
** 8" minimum for restripe projects when approved by the Engineer.




DETAIL "A"
9" min. - 10" typ.
(18" max. for traveled way greater than 48' only)

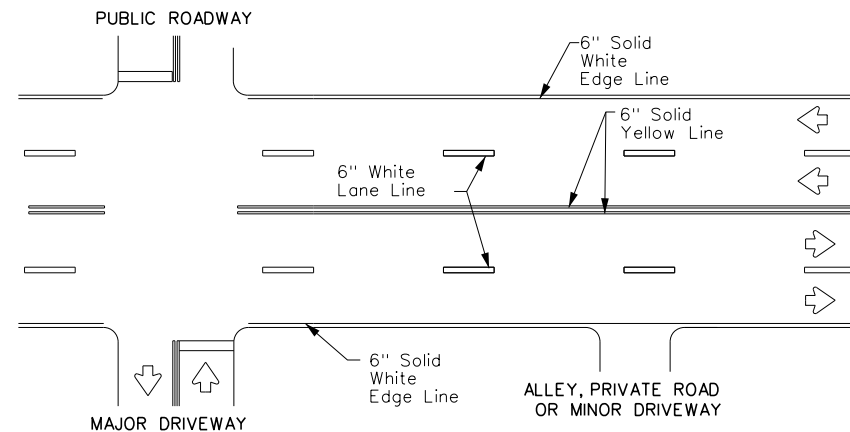


**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

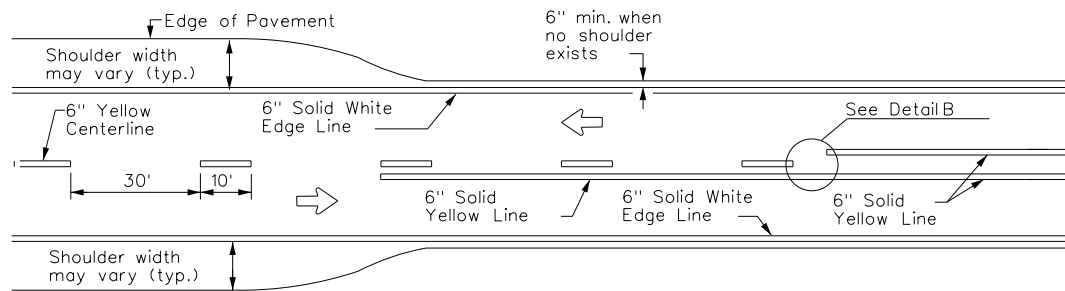


**TWO LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

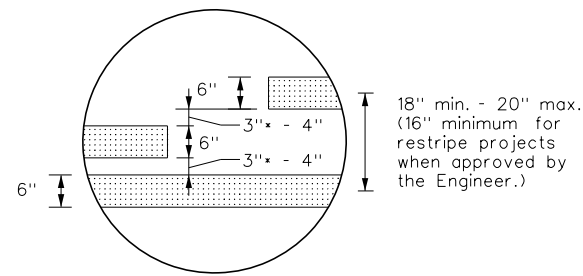


DETAIL "B"
18" min. - 20" max.
(16" minimum for restripe projects when approved by the Engineer.)
* 2" minimum for restripe projects when approved by the Engineer.



YIELD LINES



For posted speed on road being marked equal to or less than 40 MPH.

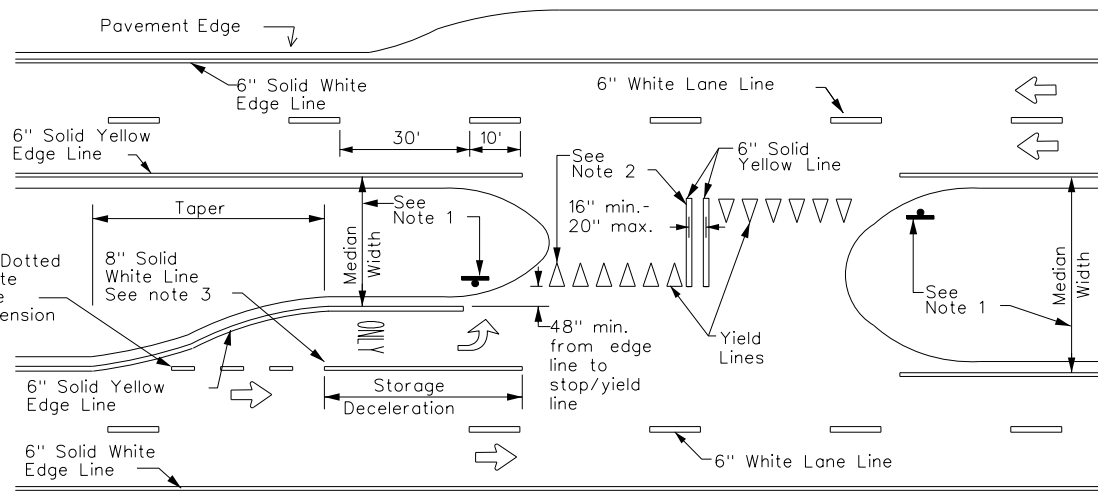

FOUR LANE DIVIDED ROADWAY CROSSOVERS

NOTES


- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

GENERAL NOTES

- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

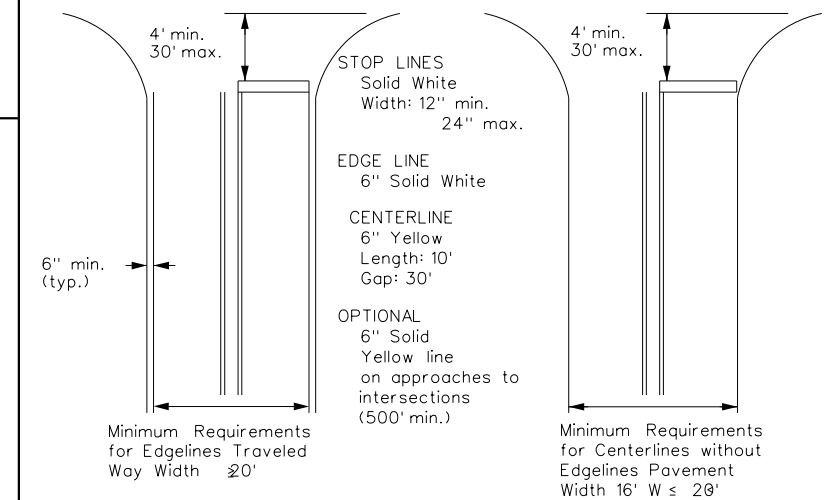

NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

**GUIDE FOR PLACEMENT OF STOP LINES,
EDGE LINE & CENTERLINE**

Based on Traveled Way and Pavement Widths for Undivided Roadways




**TYPICAL STANDARD
PAVEMENT MARKINGS**

PM(1)-22


FILE: pml-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105	02	023, ETC.	SH86/SH70
11-78 8-00 6-20	DIST	COUNTY		SHEET NO.
8-95 3-03 12-22	CHS	HALL		49
5-00 2-12				

REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

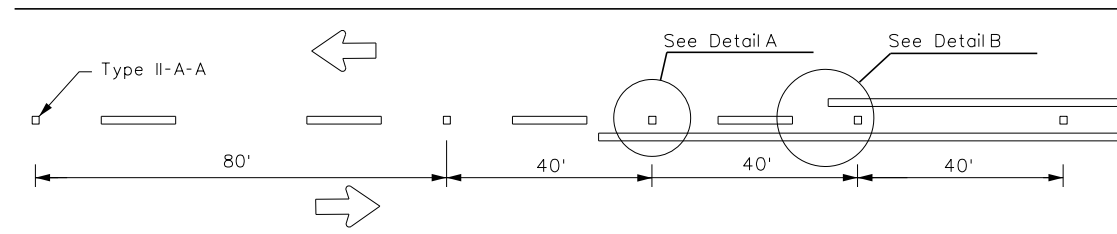


CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS

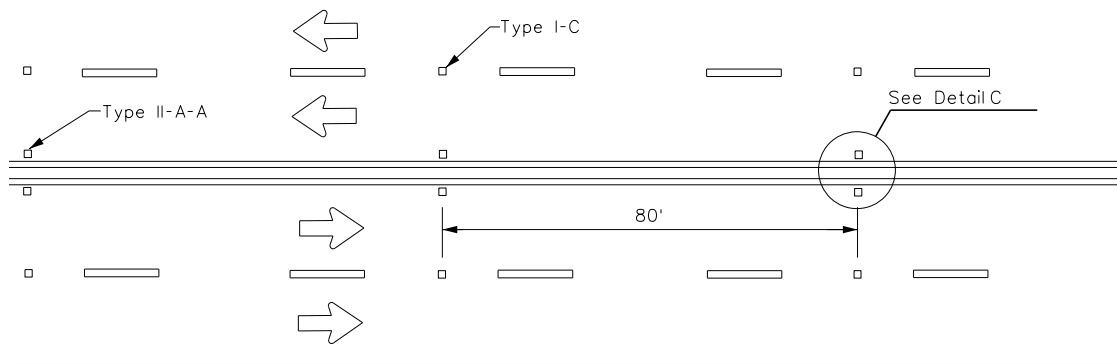

CENTERLINE & LANE LINES
FOR FOUR LANE TWO-WAY ROADWAYS

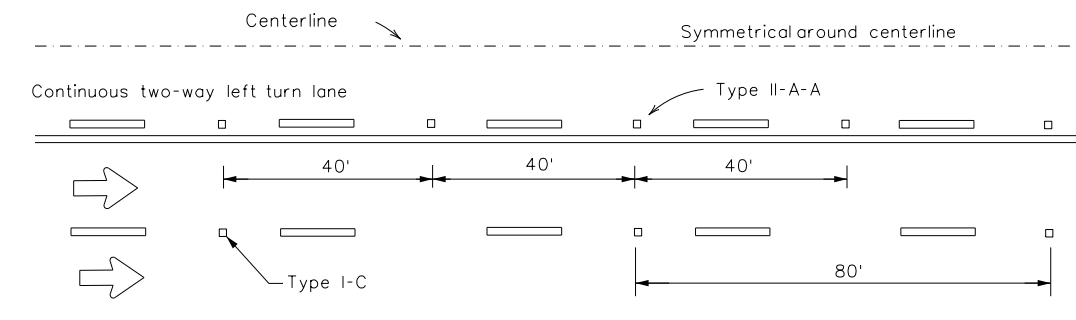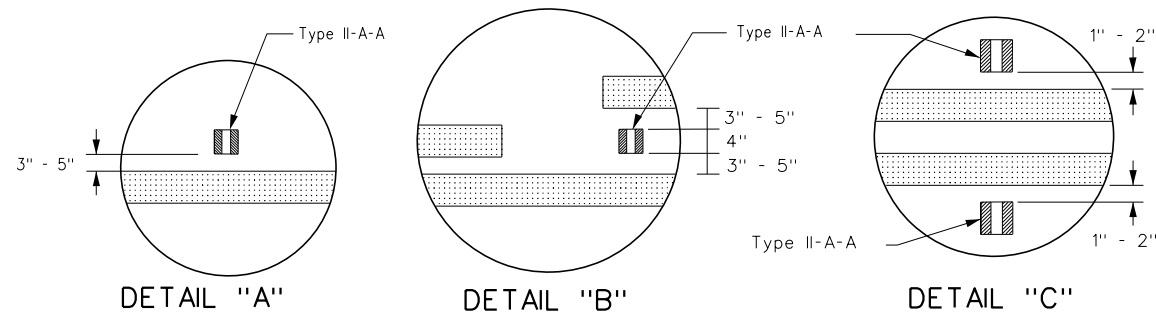

CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

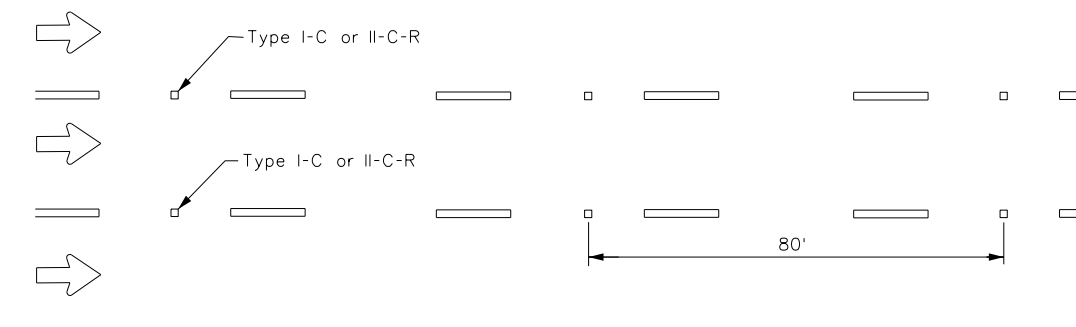


LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)


Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.
See Note 3.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

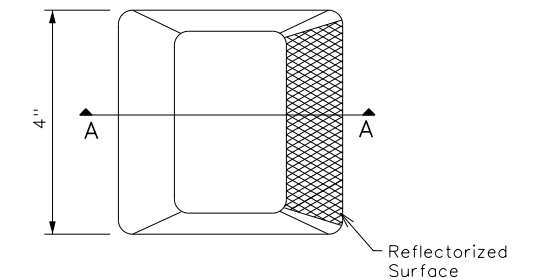

Type I (Top View)

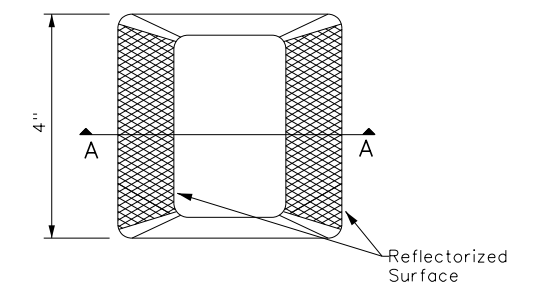

Type II (Top View)

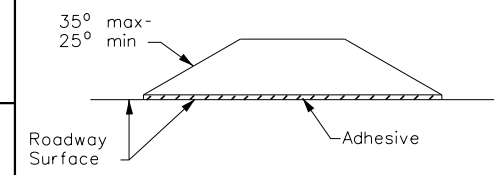



SECTION A

RAISED PAVEMENT MARKERS




POSITION GUIDANCE USING RAISED MARKERS REFLECTORIZED PROFILE MARKINGS PM(2)-22

FILE: pm2-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105	02	023, ETC.	SH86/SH70
4-77 8-00 6-20	DIST	COUNTY	SHEET NO.	
4-92 2-10 12-22	CHS	HALL	50	
5-00 2-12				

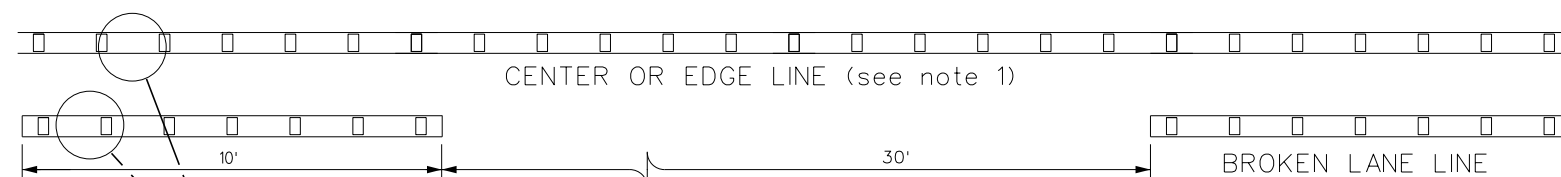

REFLECTORIZED PROFILE
PATTERN DETAIL
USING REFLECTIVE PROFILE PAVEMENT MARKINGS

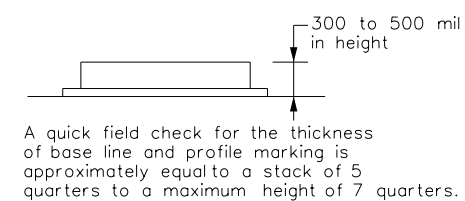

A quick field check for the thickness of base line and profile marking is approximately equal to a stack of 5 quarters to a maximum height of 7 quarters.

NOTES

- Edge lines should typically be 6" wide and the materials shall be specified in the plans.
- Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.


GENERAL NOTES

- All raised pavement markers placed along broken lines shall be placed in line with and midway between the stripes.
- On concrete pavements the raised pavement markers should be placed to one side of the longitudinal joints.
- Use raised pavement marker Type I-C with undivided roadways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

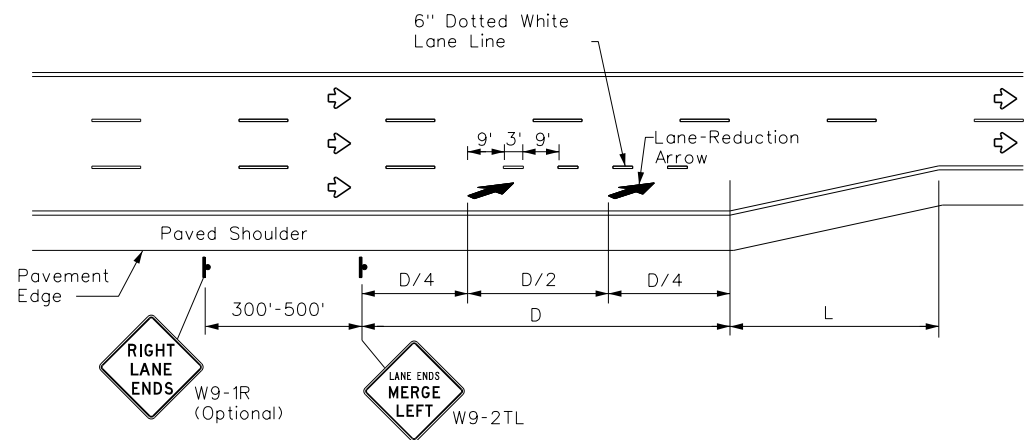

LANE REDUCTION

NOTES

- Lane reduction pavement markings are used where the number of through lanes is reduced because of narrowing of the roadway or because of a section of on-street parking in what would otherwise be a through lane. For Texas Super 2 Passing Lanes, see TS2(PL) standard sheets.
- On divided highways, an additional RIGHT LANE ENDS (W9-1R) sign may be installed in the median aligned with the W9-1R sign on the right side of the highway.
- Lane reduction arrows are required for speeds of 45 mph or greater. An optional third lane reduction arrow may be added based on engineering judgement. If used, the optional third lane reduction arrow should be centered between the first and last lane reduction arrows.
- For lane reductions on Freeways and Expressways, signing shall conform to the TxDOT Freeway Signing Handbook.


Posted Speed	D (ft)	L (ft)
30 MPH	460	$L = \frac{WS^2}{60}$
35 MPH	565	
40 MPH	670	L=WS
45 MPH	775	
50 MPH	885	
55 MPH	990	
60 MPH	1,100	
65 MPH	1,200	
70 MPH	1,250	
75 MPH	1,350	

GENERAL NOTES


- Lane use word and arrow markings shall be used where through lanes approaching an intersection become mandatory turn lanes. Lane use word and arrow markings should be used in auxiliary lanes of substantial length. Lane use arrow markings or word and arrow markings may be used in other lanes and turn bays for emphasis. Details for words and arrows are as shown in the Standard Highway Sign Designs for Texas.
- When lane-use words and arrow markings are used, two sets of arrows should be used if the length of the bay is greater than 180 feet. When a single lane use arrow or word and arrow marking is used for a short turn lane, it should be located at or near the upstream end of the full-width turn lane.
- Use raised pavement marker Type I-C with undivided highways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer. See Chapter 3 of the Roadway Design Manual for additional information on turning lanes or storage lengths.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

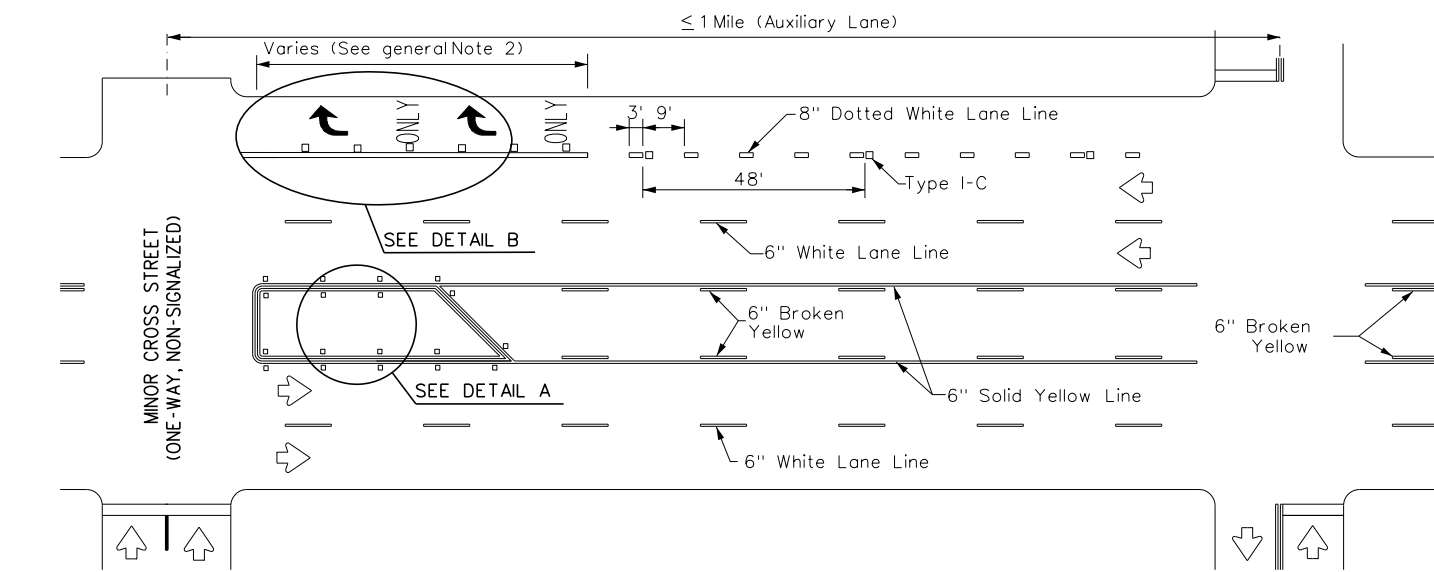


TYPICAL TWLTL AT ONE-WAY STREET AND RIGHT TURN AUXILIARY LANE

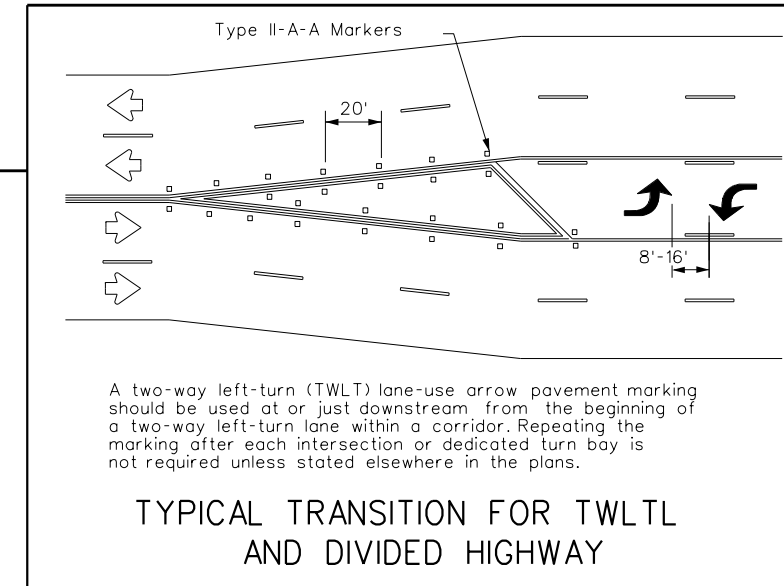


TYPICAL TRANSITION FOR TWLTL AND DIVIDED HIGHWAY

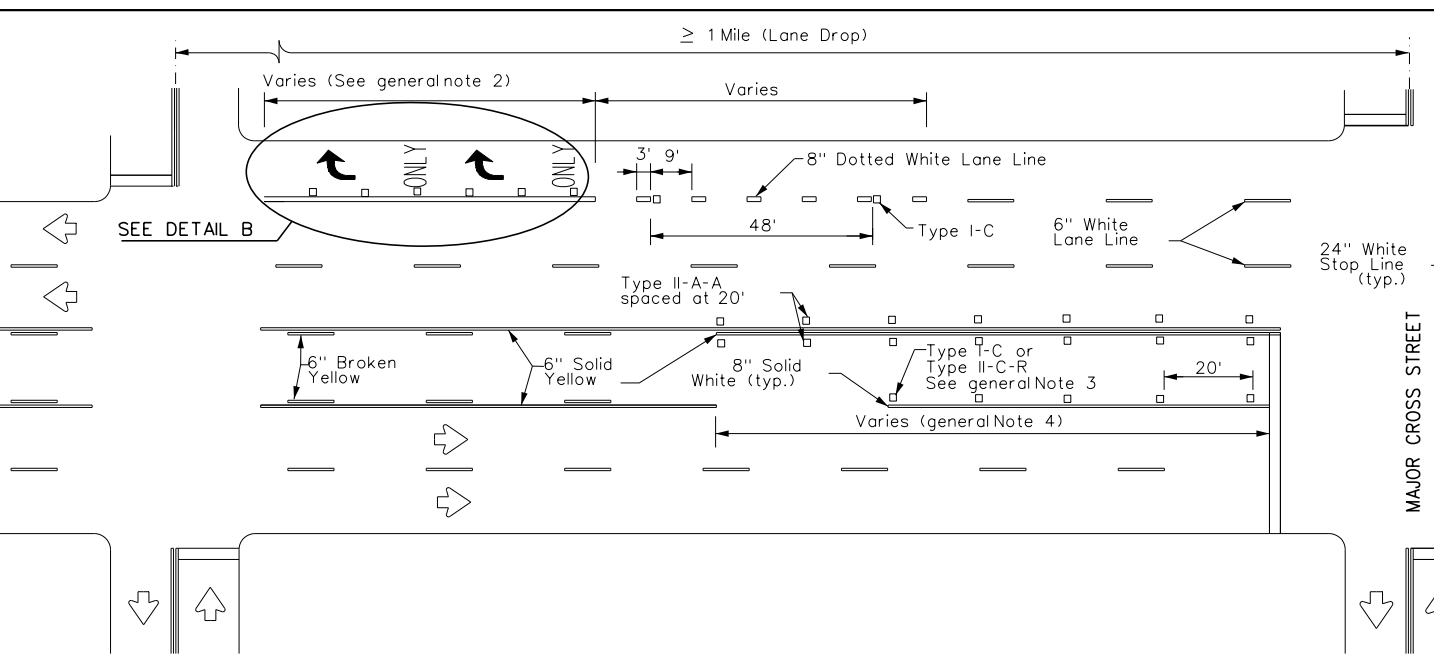

TYPICAL TWLTL AT TWO-WAY CROSS STREET AND RIGHT TURN LANE DROP

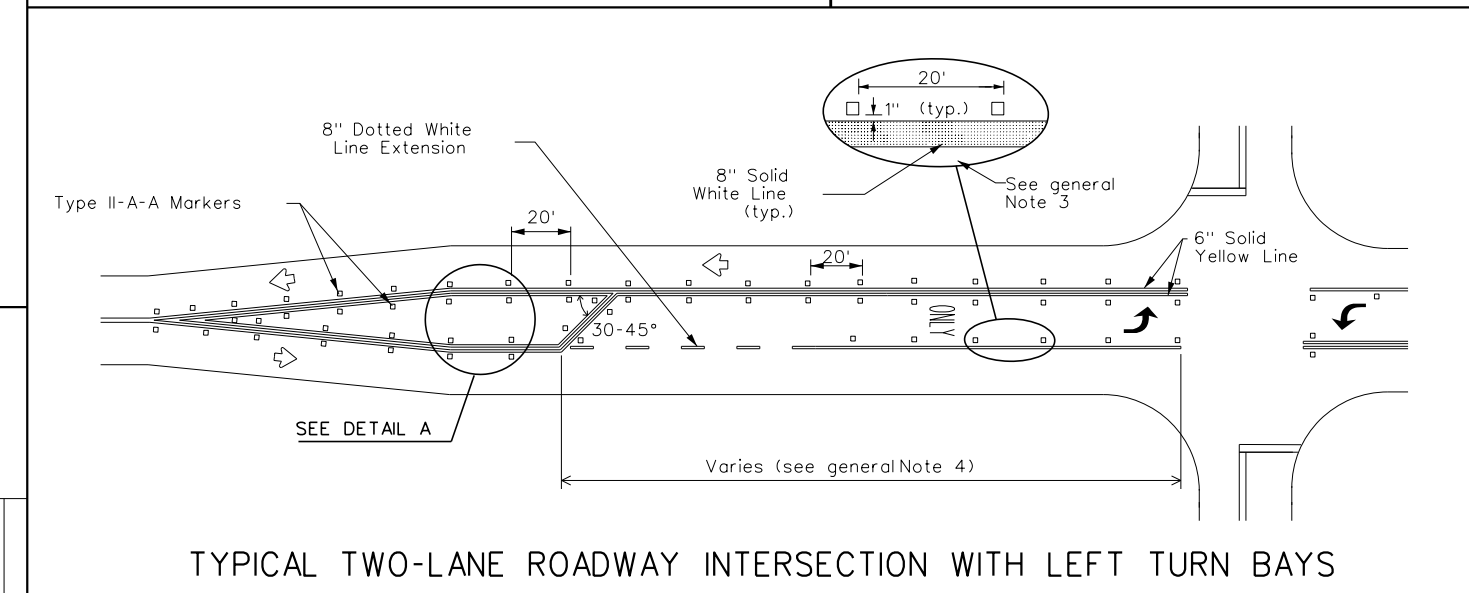

TYPICAL TWO-LANE ROADWAY INTERSECTION WITH LEFT TURN BAYS

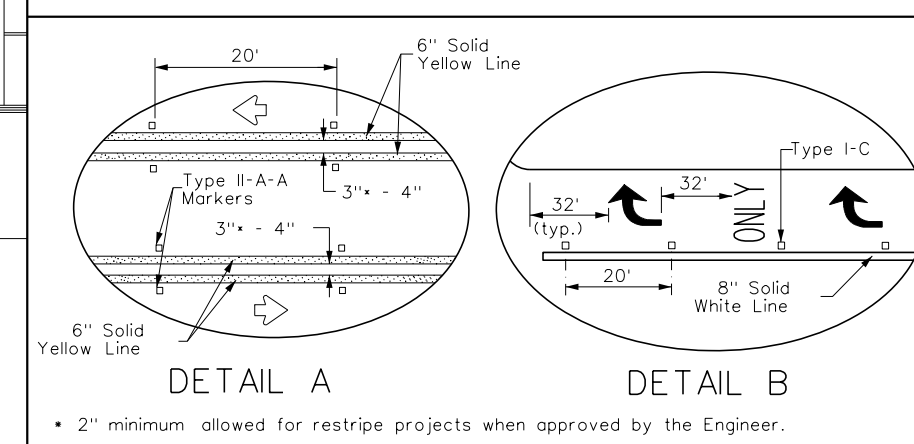

DETAIL A

DETAIL B

* 2" minimum allowed for restripe projects when approved by the Engineer.

Texas Department of Transportation
Traffic Safety Division Standard









TWO-WAY LEFT TURN LANES, RURAL LEFT TURN BAYS, AND LANE REDUCTION PAVEMENT MARKINGS PM(3)-22

FILE: pm3-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105	02	023, ETC.	SH86/SH70
4-98 3-03 6-20	DIST	COUNTY	SHEET NO.	
5-00 2-10 12-22	CHS	HALL	51	
8-00 2-12				

22C

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

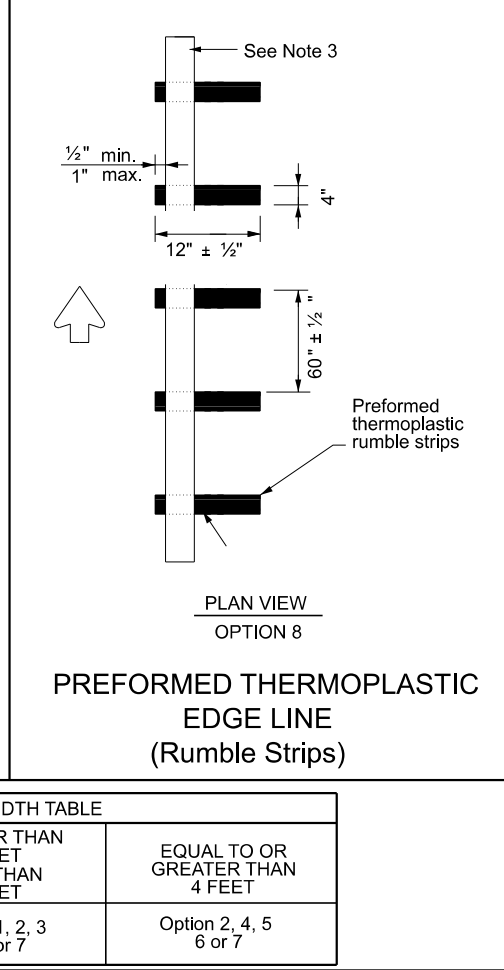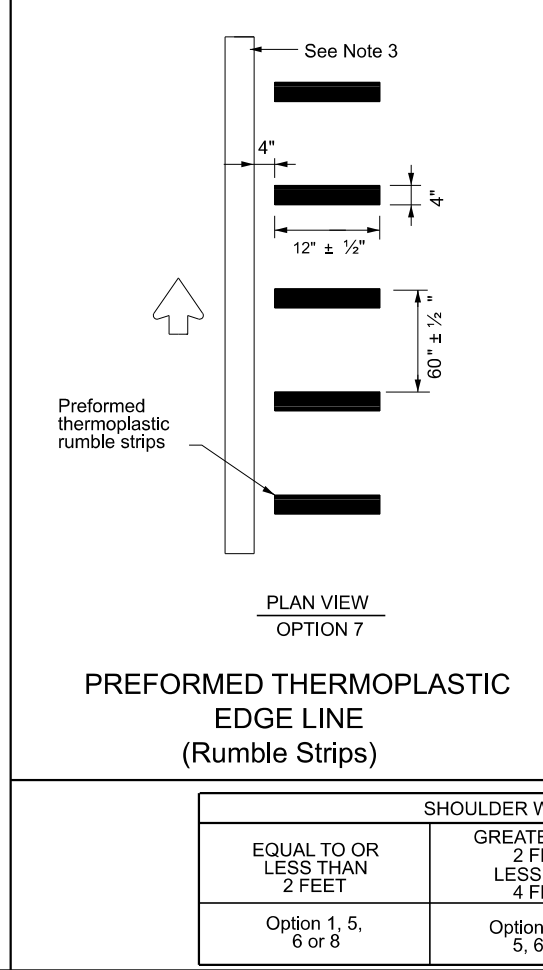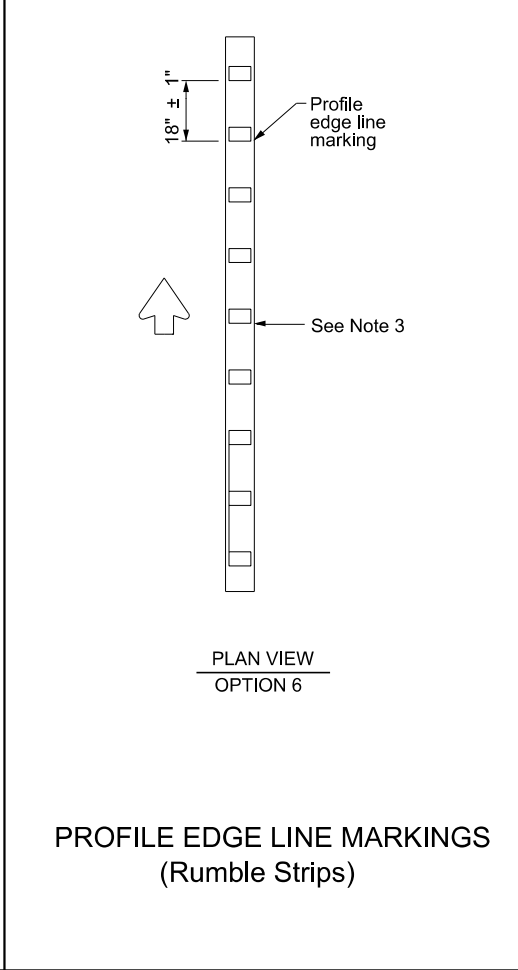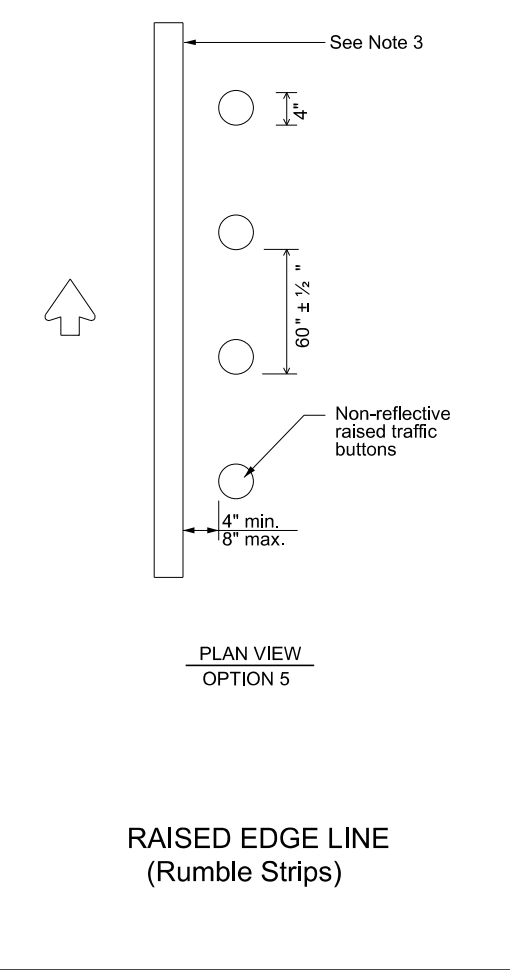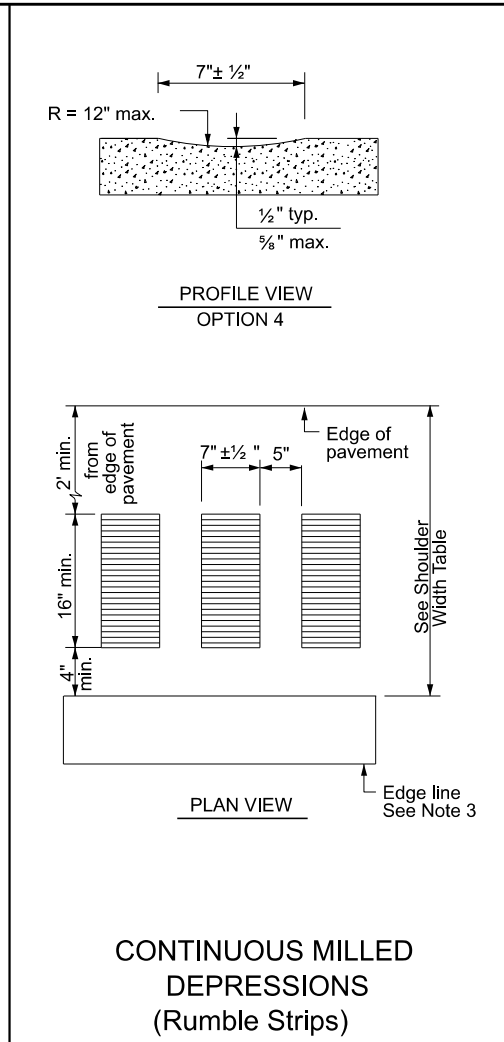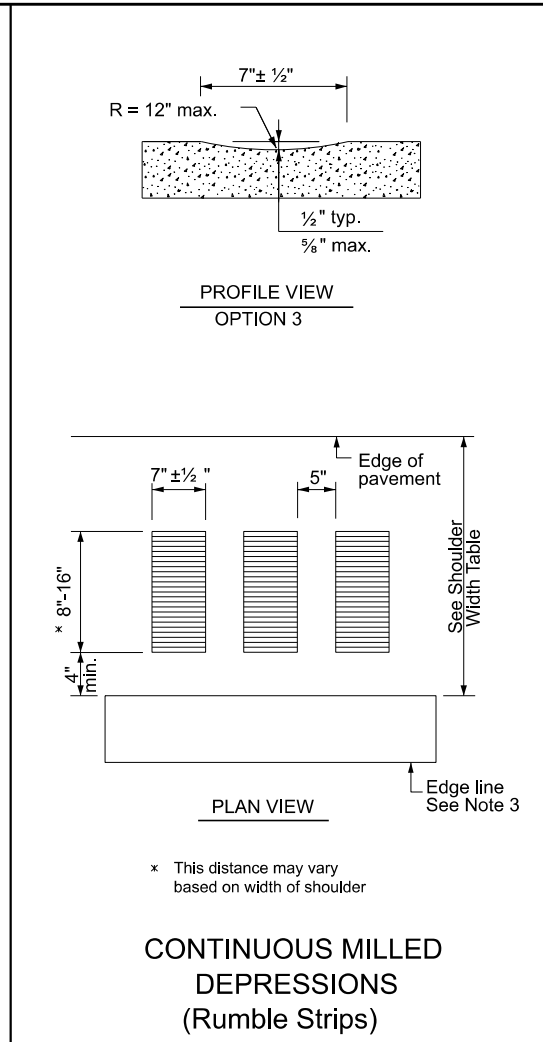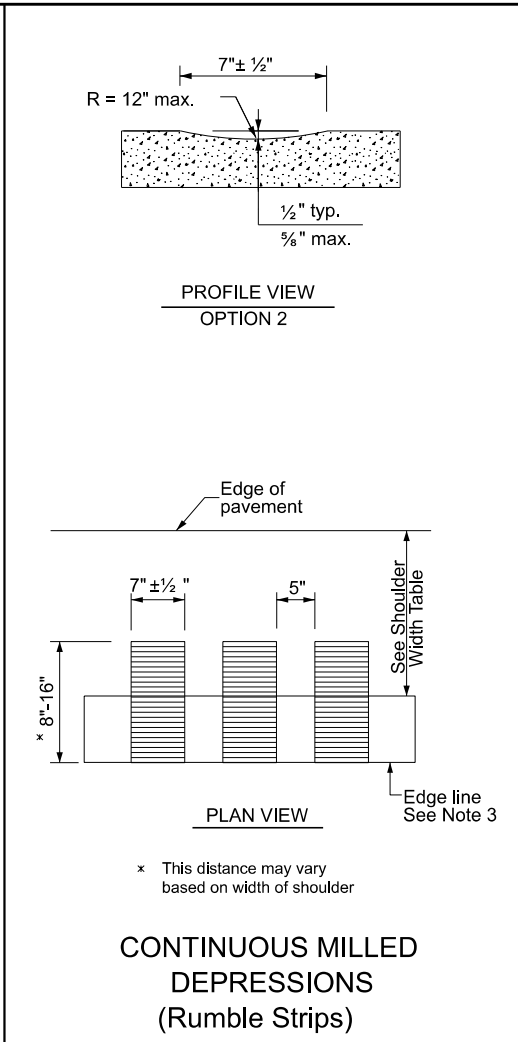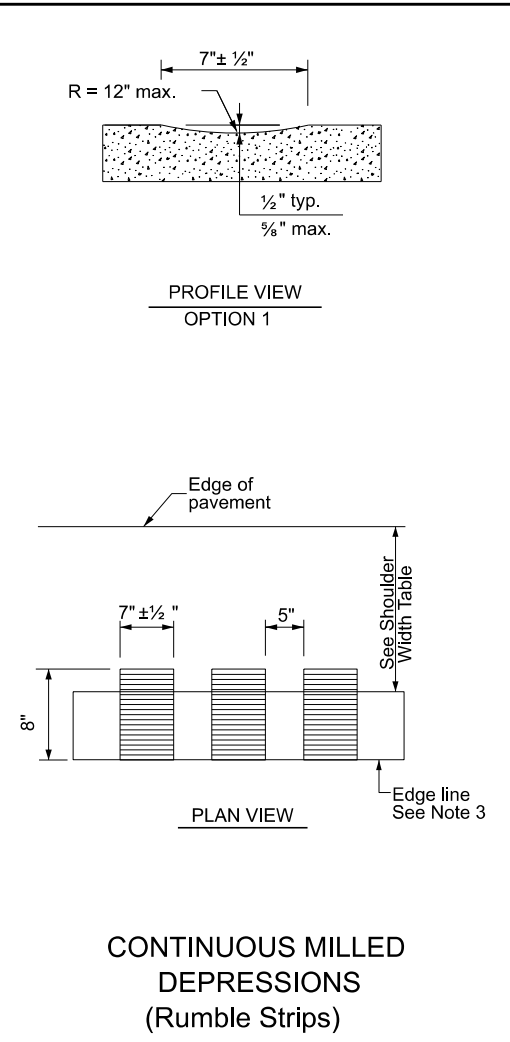

SHOULDER WIDTH TABLE		
EQUAL TO OR LESS THAN 2 FEET	GREATER THAN 2 FEET LESS THAN 4 FEET	EQUAL TO OR GREATER THAN 4 FEET
Option 1, 5, 6 or 8	Option 1, 2, 3, 5, 6 or 7	Option 2, 4, 5, 6 or 7

GENERAL NOTES

1. Rumble strips and profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.
2. Milled rumble strips are preferred when adequate pavement depth is available. If pavement thickness is less than 2 inches, milled rumble strips shall not be used. Rumble strips shall not be milled or depressed into bridge decks.
3. Use Standard Sheet PM(2) and FPM(1) for positioning, dimensioning, and spacing of all reflective raised pavement markers, pavement markings, and profile markings.
4. See the Shoulder Width Table below for determining what options may be used for edge line rumble strips.
5. Breaks in edge line rumble strips shall occur at least 50 feet and no more than 150 feet in advance of bridges, railroad crossings, intersections, or driveways with high usage of large trucks when installed on conventional highways.
6. Rumble strips shall not be placed across exit or entrance ramps, acceleration or deceleration lanes, crossovers, gore areas, or intersections with other roadways.
7. Consideration should be given to noise levels when edgeline rumble strips are to be installed near residential areas, schools, churches, etc. A 3/8 inch deep (minimum) milled rumble strip may be considered in these areas.
8. Consideration shall be given to bicyclists. See RS(6).

WHEN INSTALLING MILLED DEPRESSION EDGE LINE RUMBLE STRIPS:

9. See dimensions for milled rumble strips. Other shapes and dimensions may be used if approved by the Traffic Safety Division.
10. Pavement markings can be applied over milled shoulder rumble strips to create an edge line rumble strip.

WHEN INSTALLING RAISED OR PROFILE EDGE LINE RUMBLE STRIPS:

11. Raised rumble strips consisting of non-reflective raised traffic buttons may be used. Non-reflective raised traffic buttons can be affixed to asphalt or concrete with bitumen or adhesives, as per the manufacturer's recommendations.
12. Non-reflective traffic buttons shall be placed adjacent to the pavement marking delineating the edge line when used as a rumble strip. The color of the button should match the color of the adjacent edge line marking (white or yellow). The buttons will be paid for under Item 672, "Raised Pavement Markers." Non-reflective traffic buttons must meet the requirements of DMS-4300.
13. Non-reflective traffic buttons shall not be placed across exit or entrance ramps, acceleration and deceleration lanes, crossovers, gore areas or intersections with other roadways.
14. The minimum distance between the edge line and the buttons should be used if the shoulder is less than 8 feet in width.
15. Raised profile thermoplastic markings used as edge lines may substitute for buttons.

Traffic Safety Division Standard

EDGE LINE RUMBLE STRIPS ON UNDIVIDED OR TWO LANE HIGHWAYS


RS(2)-23

FILE: rs(2)-23.dgn	DIN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT	January 2023	CONT	SECT	JOB
		0105	02	023, ETC.
10-13	REVISIONS			SH86/SH70
1-23		DIST	COUNTY	SHEET NO.
		CHS	HALL	52






DISCLAIMER:
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:


TWO LANE TWO-WAY HIGHWAYS

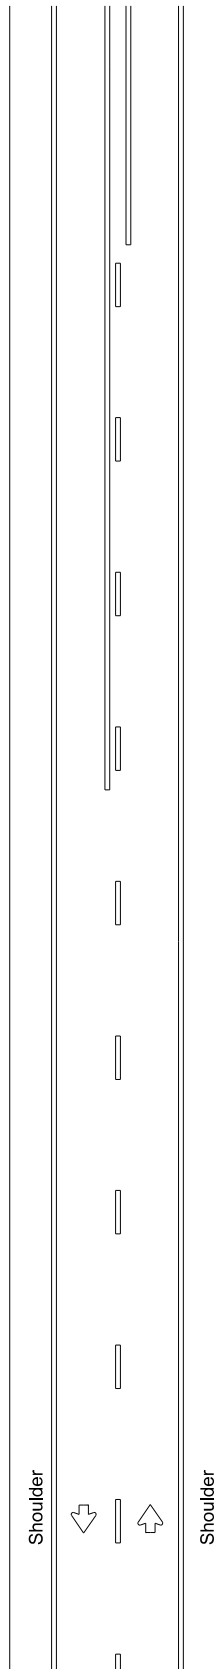


CENTERLINE RUMBLE STRIPS

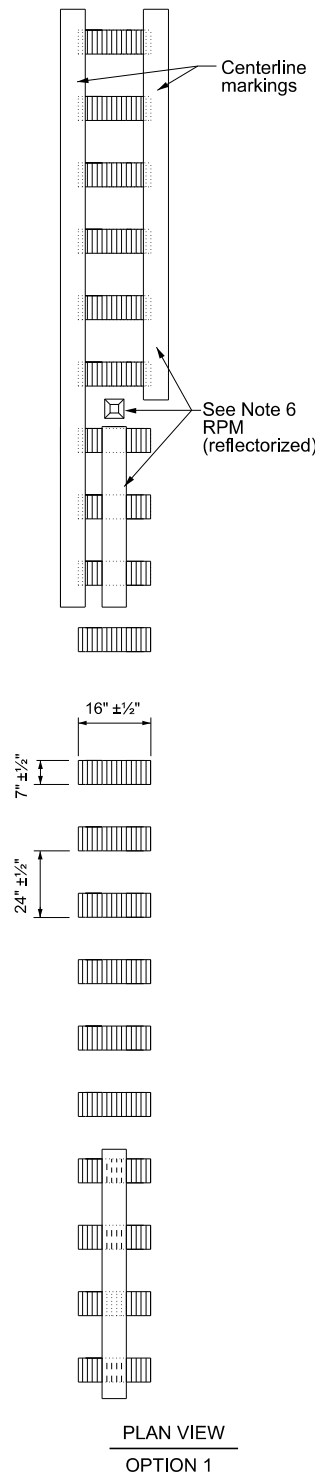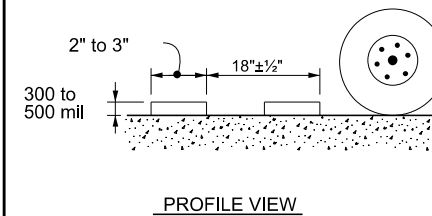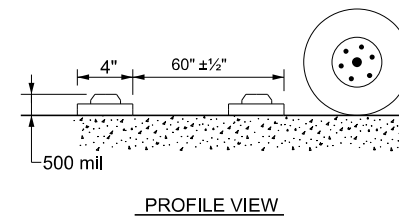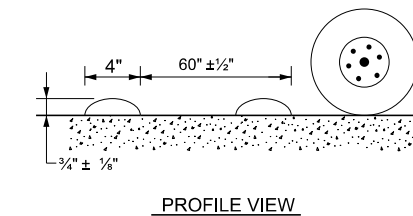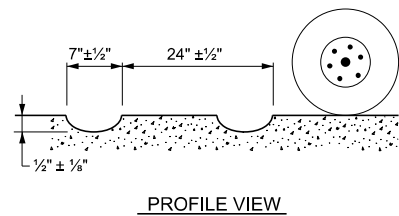


MILLED CENTERLINE RUMBLE STRIPS

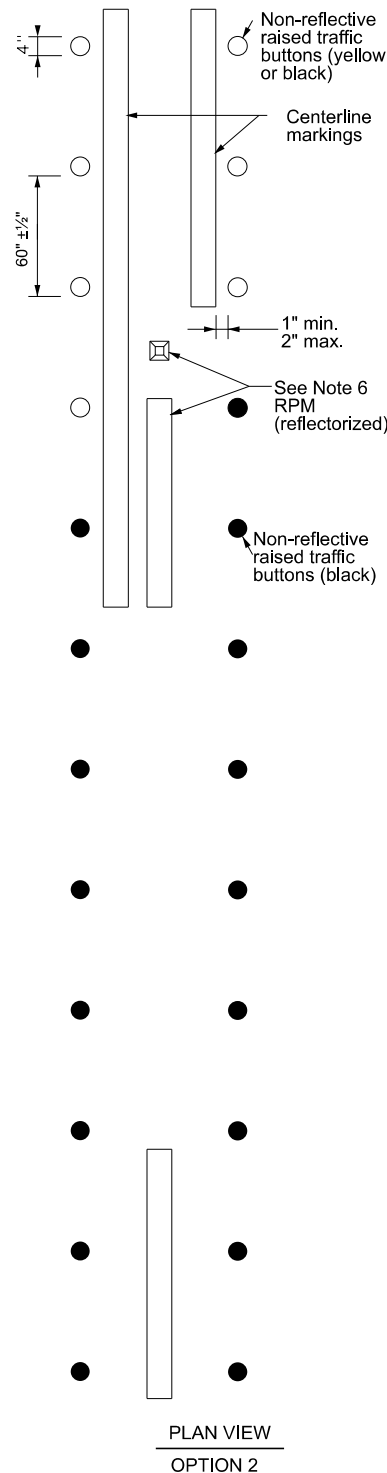

RAISED CENTERLINE RUMBLE STRIPS

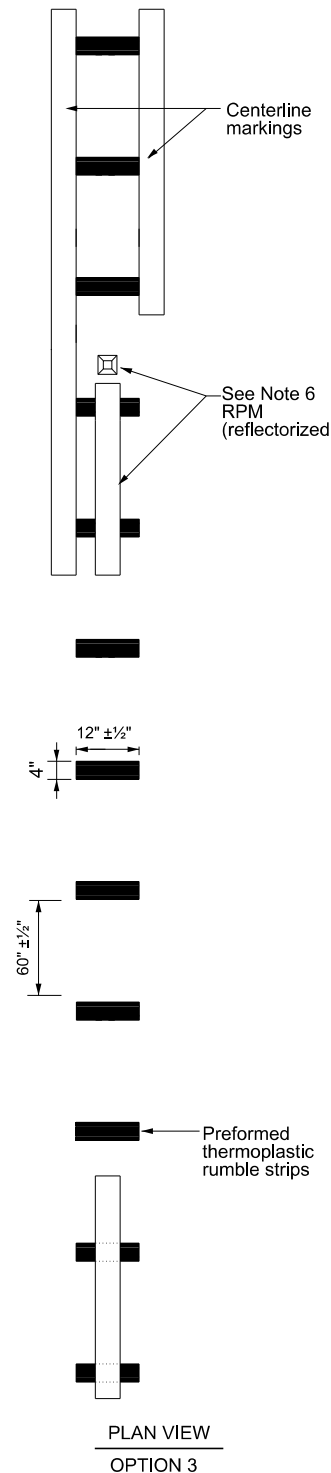

PREFORMED THERMOPLASTIC RUMBLE STRIPS

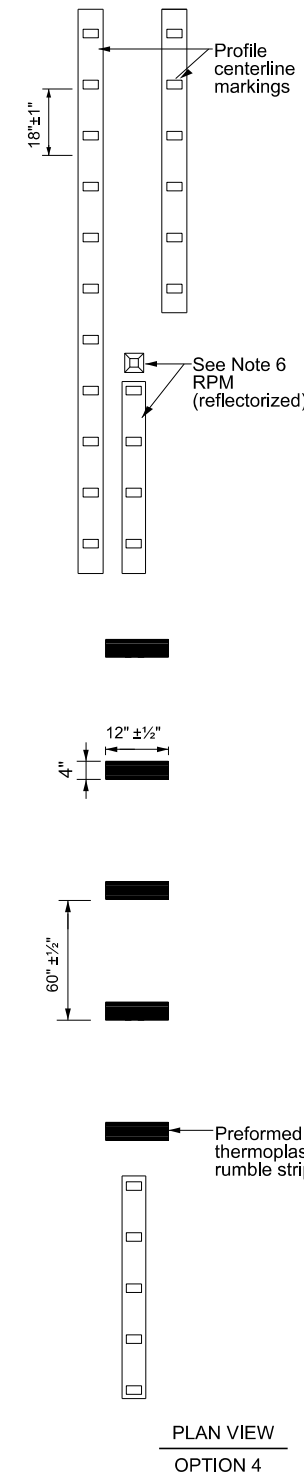

PROFILE CENTERLINE MARKINGS AND PREFORMED THERMOPLASTIC RUMBLE STRIPS

GENERAL NOTES

1. This standard sheet provides guidelines for installing centerline rumble strips on two-lane highways with or without shoulders.
2. Centerline and edge line rumble strips or profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.
3. Milled rumble strips are preferred when adequate pavement depth is available. If pavement thickness is less than 2 inches, milled rumble strips shall not be used. Rumble strips shall not be milled or depressed into bridge decks.
4. See dimensions for milled rumble strips. Other shapes and dimensions may be used if approved by the Traffic Safety Division.
5. Breaks in milled centerline rumble strips shall occur at least 50 feet and no more than 150 feet in advance of bridges, railroad crossings, intersections or driveways with high usage of large trucks.
6. Use standard sheet PM(2) for positioning, dimensioning, and spacing of all reflective raised pavement markers, pavement markings and profile markings.
7. Consideration should be given to noise levels when centerline rumble strips are to be installed near residential areas, schools, churches, etc. A 3/8 inch deep (minimum) milled rumble strip may be considered in these areas.
8. Pavement markings must be applied over milled centerline rumble strips.

WHEN INSTALLING CENTERLINE RUMBLE STRIPS:

9. Raised rumble strips consisting of non-reflective raised traffic buttons may be used. Non-reflective raised traffic buttons can be affixed to asphalt or concrete with bitumen or adhesives, as per manufacturer's recommendations.
10. When using non-reflective raised traffic buttons as a centerline rumble strip, the button shall be placed adjacent to the pavement marking delineating the centerline. The buttons will be paid for under Item 672, "Raised Pavement Markers." Non-reflective traffic buttons must meet the requirements of DMS-4300.
11. The color of the button should be yellow for a continuous no passing roadway. Black buttons should be used in areas where passing is allowed.
12. Consideration shall be given to bicyclists. See RS(6).



WHEN INSTALLING EDGE LINE RUMBLE STRIPS WITH OR WITHOUT CENTERLINE RUMBLE STRIPS ON UNDIVIDED HIGHWAYS:

13. See standard sheet RS(2).


<p>CENTERLINE RUMBLE STRIPS ON TWO LANE TWO-WAY HIGHWAYS</p> <p>RS(4)-23</p>			
FILE:	rs(4)-23.dgn	DN:	TxDOT
© TxDOT	January 2023	CK:	TxDOT
REVISIONS	0105 02	DW:	TxDOT
10-13 1-23		HW:	TxDOT
		CONT:	0105 02
		SECT:	023, ETC.
		JOB:	SH86/SH70
		DIST:	COUNTY
		CHS:	HALL
		SHEET NO.:	53

RUMBLE STRIP TYPICAL APPLICATION

See Note 1

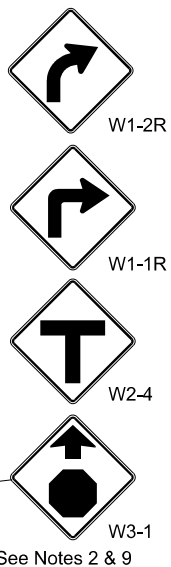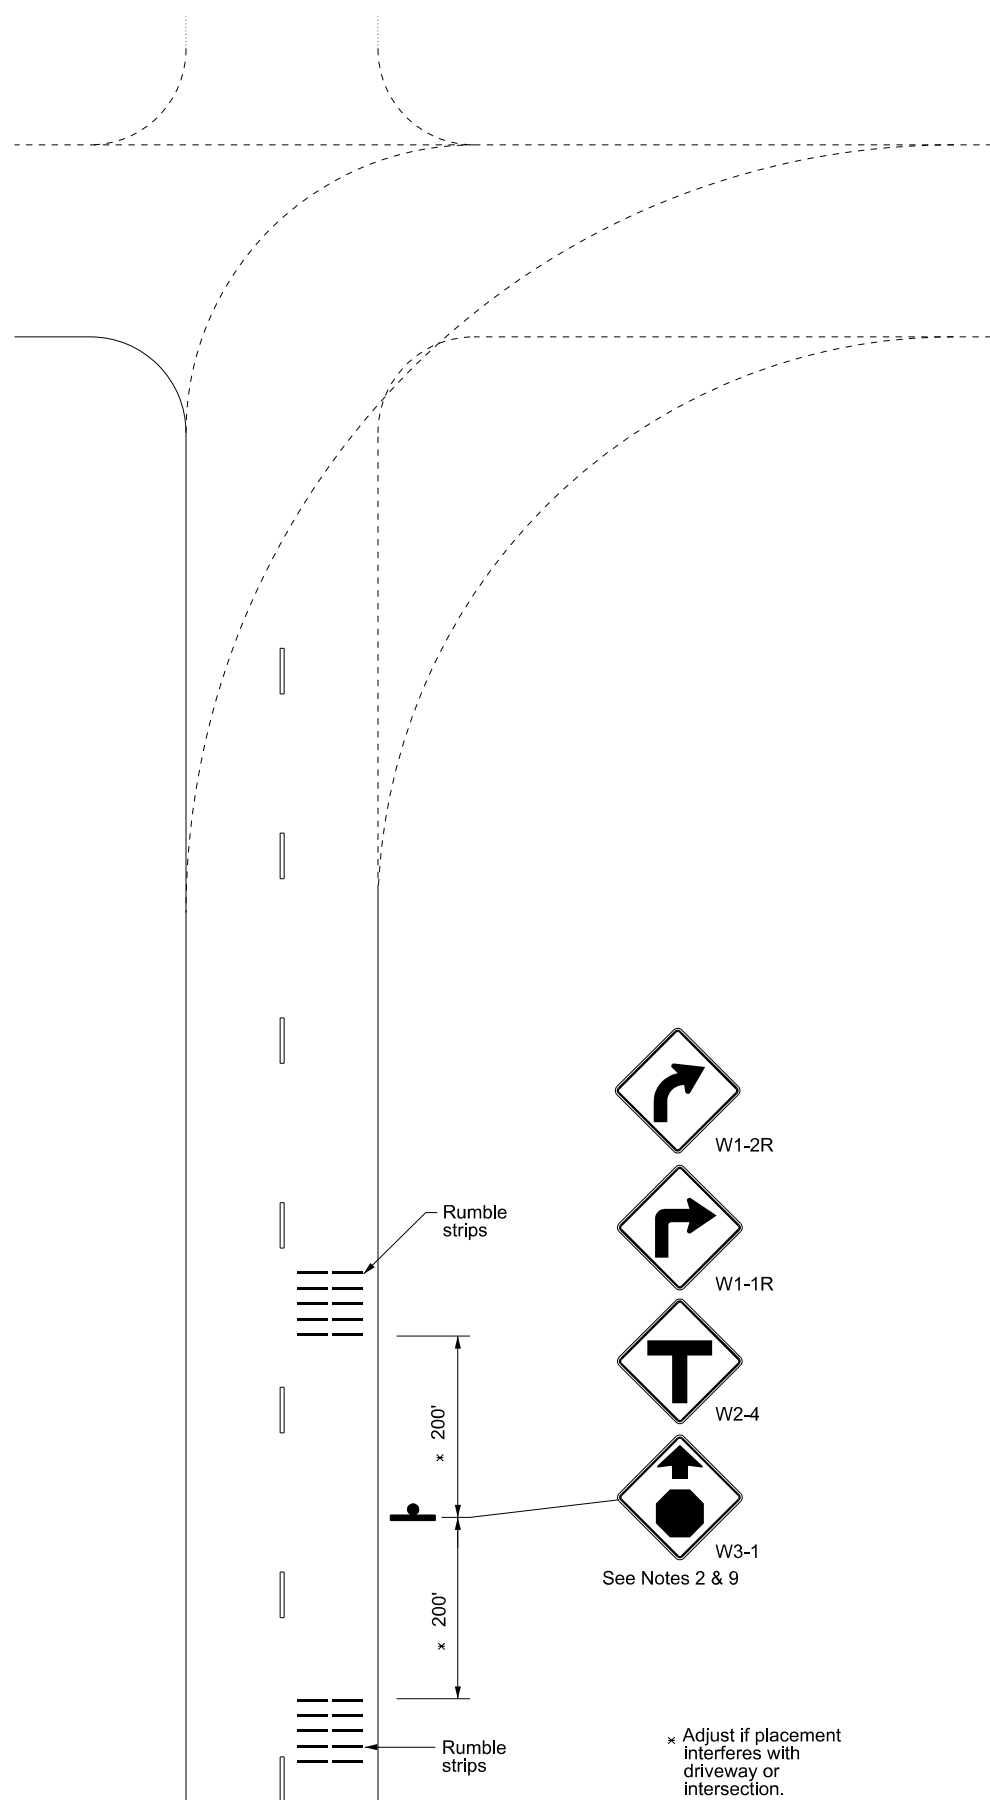


* Adjust if placement interferes with driveway or intersection.

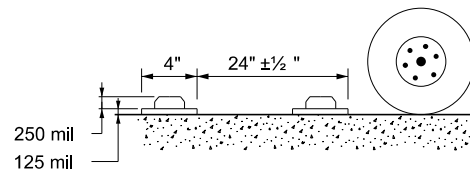


PROFILE VIEW

RUMBLE STRIP STANDARD PATTERN

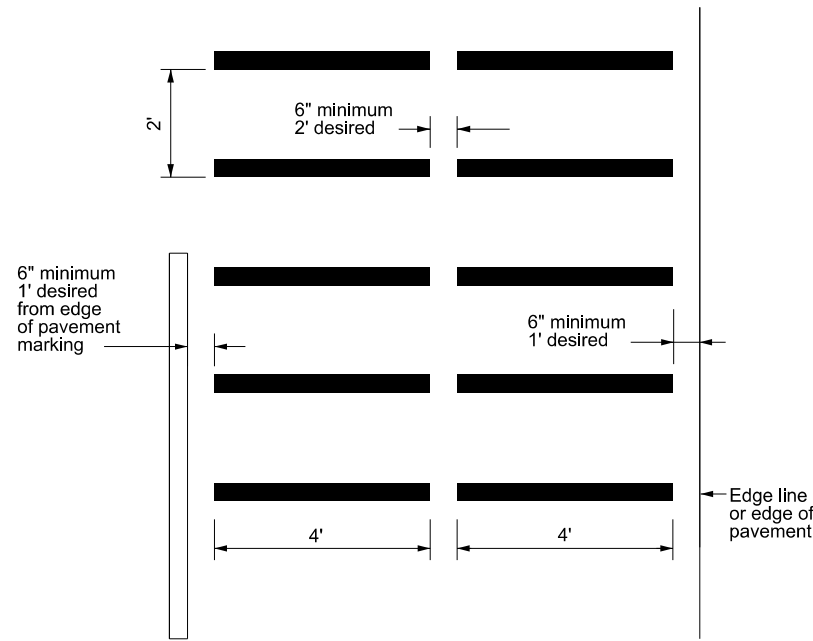

PLAN VIEW

RUMBLE STRIP ALTERNATIVE PATTERN

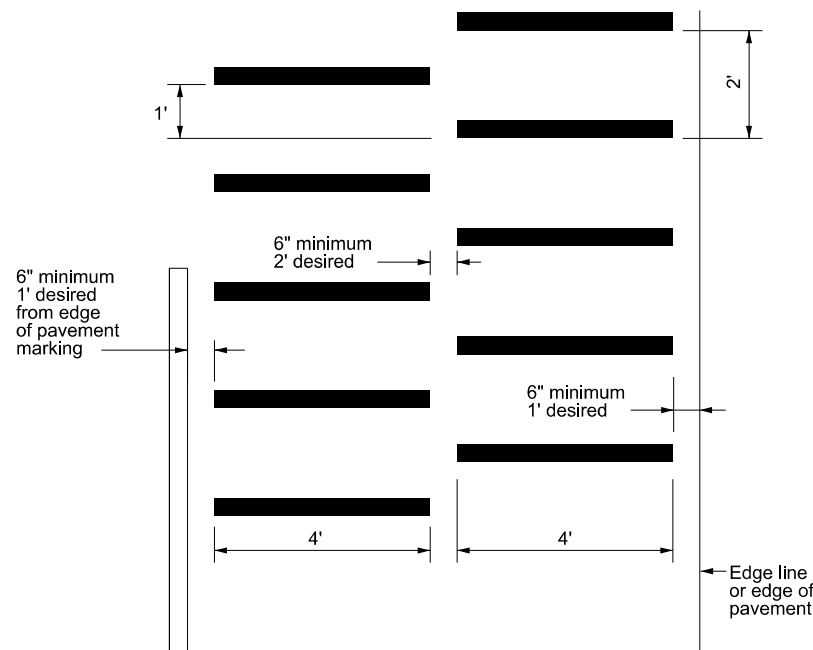

PLAN VIEW

GENERAL NOTES

1. Transverse or in-lane rumble strips should only be used at high incident and special geometric locations. These special geometric locations may include: approaches to rural, high speed signalized or stop-controlled intersections with sight restrictions and/or high crash rates, approaches to unexpected urban intersections, approaches to newly installed stop or signalized controlled intersections, approaches to toll plazas, approaches to hazardous horizontal curves, and approaches to railroad grade crossings.
2. When used, the rumble strips shall be placed 200 feet upstream and downstream of the warning sign.
3. The use of rumble strips should not be widespread or indiscriminate.
4. Preformed black raised rumble strips should be used. They should be installed in accordance with the manufacturer's recommendations.
5. Please reference the TxDOT Material Producers List for approved rumble strips (transverse): <http://www.txdot.gov/>
6. Consideration should be given to noise levels when in-lane or transverse rumble strips are to be installed near residential areas, schools, churches, etc.
7. The RUMBLE STRIPS AHEAD (W17-2T) sign may be used in advance of in-lane or transverse rumble strips, based on engineering judgement. This sign is typically not necessary for rumble strip installations built to the guidelines on this standard sheet. When used, this sign should be spaced in advance of the rumble strips based on the Guidelines for Advance Placement of Warning Signs table of the Texas Manual on Uniform Traffic Control Devices.
8. Consideration shall be given to bicyclists. See RS(6).
9. Other signs can be used as conditions warrant.




W17-2T

DISCLAIMER:
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

				Texas Department of Transportation		Traffic Safety Division Standard	
<h2>TRANSVERSE OR IN-LANE RUMBLE STRIPS</h2> <h3>RS(5)-23</h3>							
FILE:	rs(5)-23.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT
© TxDOT	January 2023	CONT	SECT	JOB	HIGHWAY		
4-06	1-12	0105	02	023, ETC.	SH86/SH70		
2-10		DIST	COUNTY	SHEET NO.			
10-13		CHS	HALL	53A			
94							

DATE: 8/1/2023 1:32:03 PM
 FILE: I:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\General\Hydraulic Data @D-rw.dgn

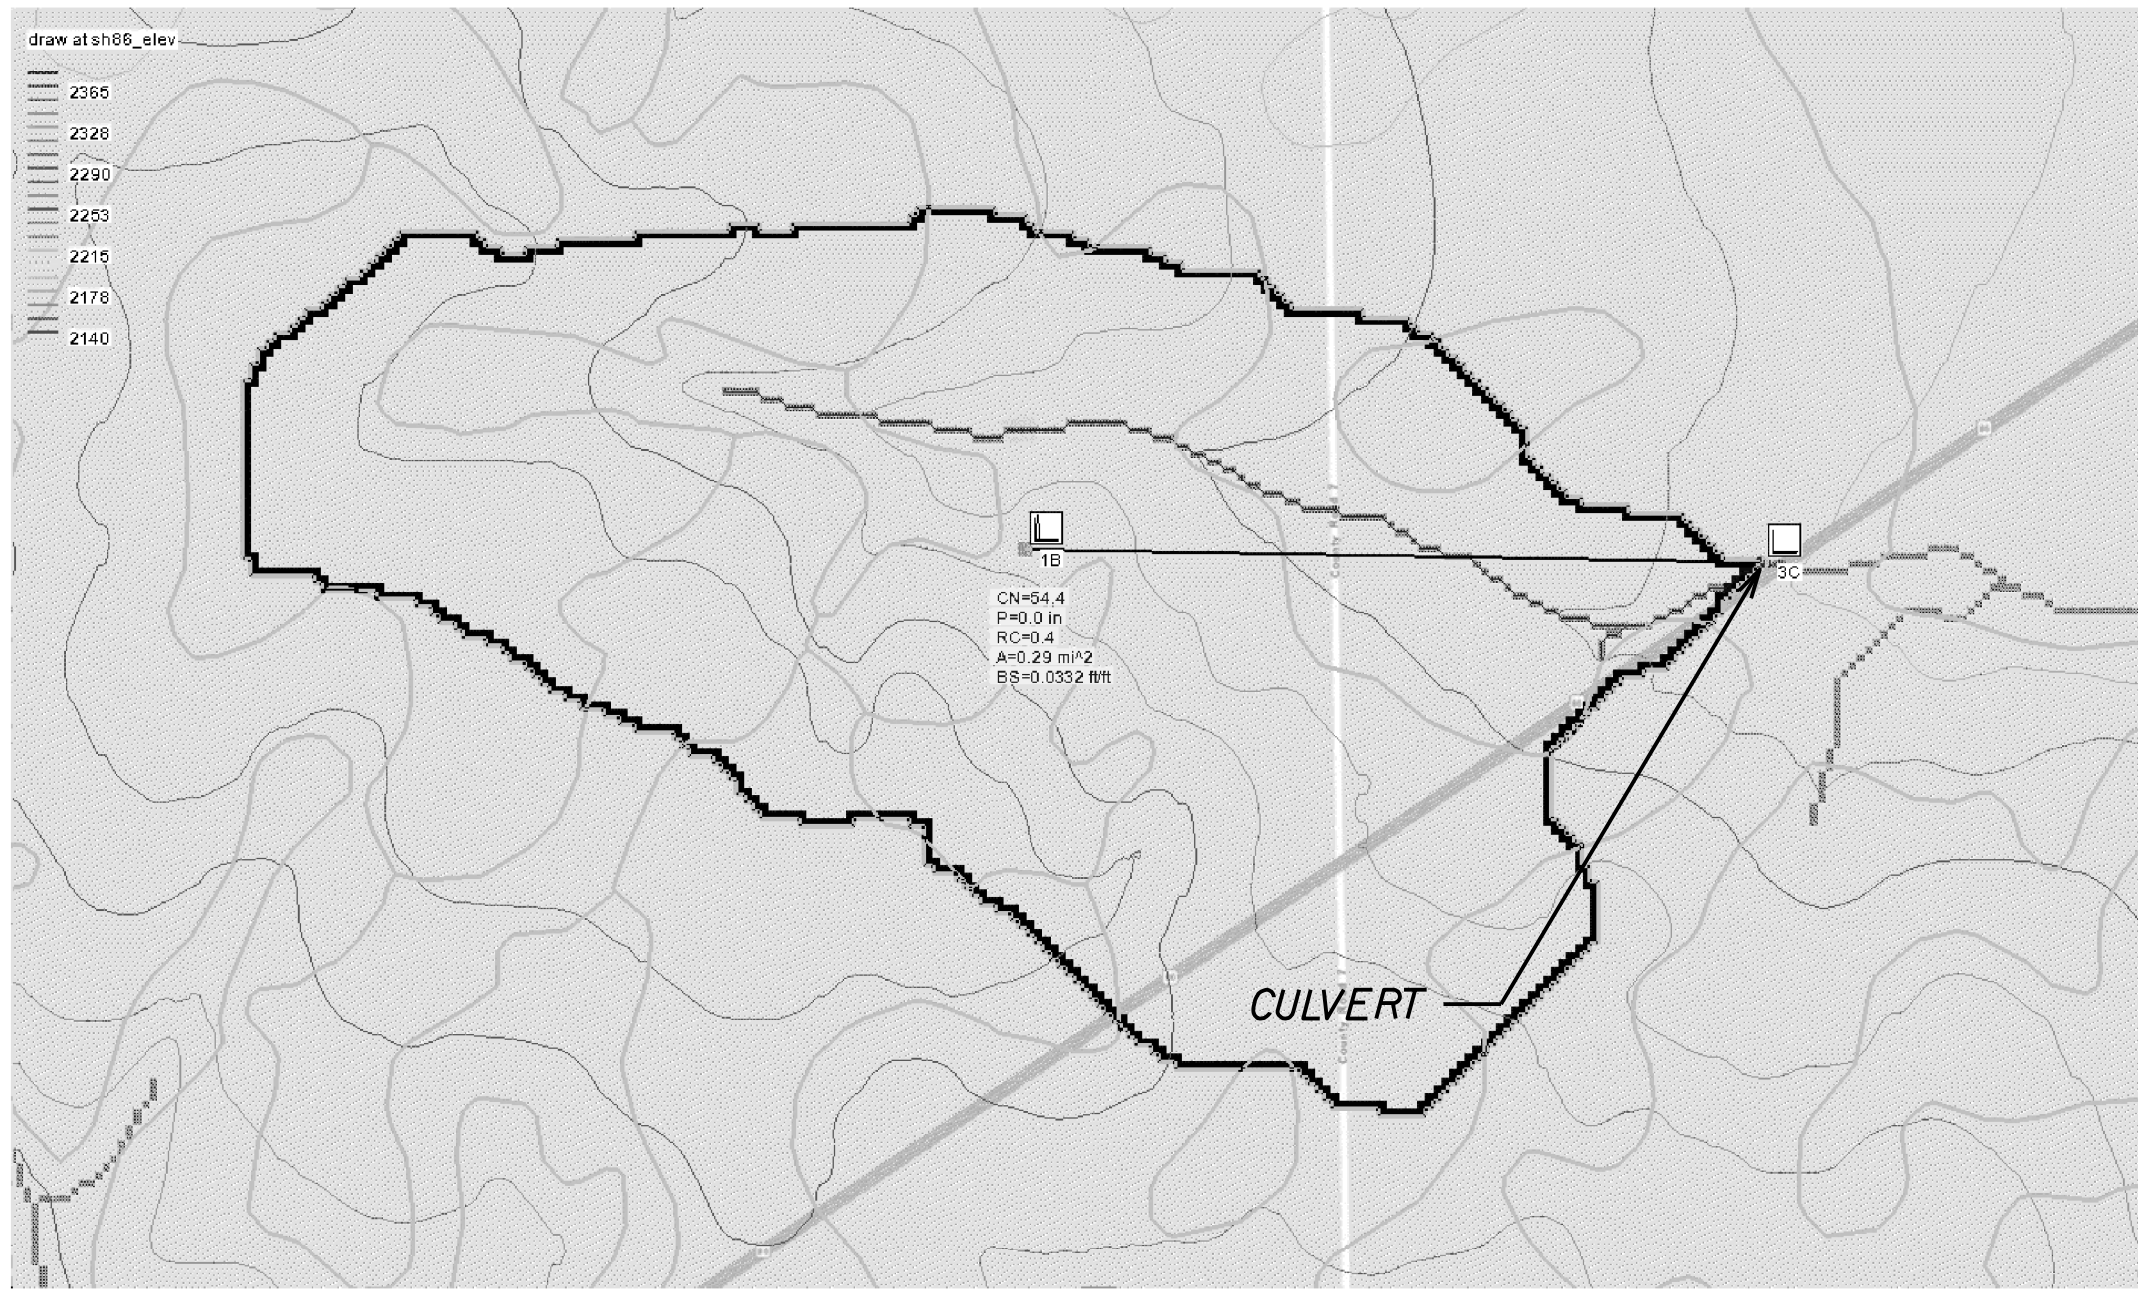

HALL COUNTY IS NOT A PARTICIPANT IN THE FEMA NFIP .THERE ARE NO FEMA FLOODPLAINS IN PROJECT AREA.THE IMPACT OF THE NEW STRUCTURE WILL NOT INCREASE THE FLOODING OF ANY EXISTING STRUCTURES OR CROPLAND.THE PROPOSED MODEL OF THE 100 YEAR FLOOD INCREASES THE WATER SURFACE LEVEL LESS THAN THE ONE FOOT RECOMMENDED BY FEMA.

NOTES:
 HEC-RAS USED FOR HYDRAULIC ANALYSIS AND DESIGN.
 STEADY FLOW BOUNDARY CONDITIONS ARE BASED ON
 NORMAL DEPTH WITH A DOWNSTREAM SLOPE OF 0.015259 PERCENT.



Charles B. Steed, P.E.
 08/03/2023

EXISTING CONDITION	FREQUENCY-25 YEAR			
	STA.	Q (CFS)	VEL (FPS)	WSEL (FT)
SECTION 5 (U.S.BOUNDARY)	7929.00	99	4.24	2282.46
SECTION 4 (U.S.OF BRIDGE)	5880.00	99	3.59	2251.25
SECTION 3 (U.S.OF BRIDGE)	4112.00	99	3.43	2230.69
UPSTREAM BRIDGE FACE	4018J CULV U	99	2.44	2230.69
DWNSTREAM BRIDGE FACE	4018J CULV D	99	1.59	2229.60
SECTION 2 (D.S.OF BRIDGE)	4008.00	99	2.93	2229.60
SECTION 1 (D.S.BOUNDARY)	3057.00	99	4.44	2218.97

EXISTING CONDITION	FREQUENCY-100 YEAR			
	STA.	Q (CFS)	VEL (FPS)	WSEL (FT)
SECTION 5 (U.S.BOUNDARY)	7929.00	120	4.21	2282.58
SECTION 4 (U.S.OF BRIDGE)	5880.00	120	3.83	2251.31
SECTION 3 (U.S.OF BRIDGE)	4112.00	120	3.67	2230.73
UPSTREAM BRIDGE FACE	4018J CULV U	120	2.89	2230.73
DWNSTREAM BRIDGE FACE	4018J CULV D	120	1.90	2229.66
SECTION 2 (D.S.OF BRIDGE)	4008.00	120	3.09	2229.66
SECTION 1 (D.S.BOUNDARY)	3057.00	120	4.54	2219.11

A * CONTRIBUTING DRAINAGE AREA (SQ.MI.)	0.29
S * SLOPE (FT/FT)	0.0332
P * ANNUAL PRECIPITATION (IN.)	9.87
Q (2 YEAR)	54 cfs
Q (5 YEAR)	70 cfs
Q (10 YEAR)	82 cfs
Q (25 YEAR)	99 cfs
Q (50 YEAR)	109 cfs
Q (100 YEAR)	120 cfs
Q (500 YEAR)	154 cfs

DESIGN CONDITION	FREQUENCY-25 YEAR			
	STA.	Q (CFS)	VEL (FPS)	WSEL (FT)
SECTION 5 (U.S.BOUNDARY)	7929.00	99	4.24	2282.46
SECTION 4 (U.S.OF BRIDGE)	5880.00	99	2.89	2251.35
SECTION 3 (U.S.OF BRIDGE)	4112.00	99	3.16	2229.77
UPSTREAM BRIDGE FACE	4018J CULV U	99	4.21	2229.77
DWNSTREAM BRIDGE FACE	4018J CULV D	99	4.48	2229.50
SECTION 2 (D.S.OF BRIDGE)	4008.00	99	3.08	2229.50
SECTION 1 (D.S.BOUNDARY)	3057.00	99	4.44	2218.97

DESIGN CONDITION	FREQUENCY-100 YEAR			
	STA.	Q (CFS)	VEL (FPS)	WSEL (FT)
SECTION 5 (U.S.BOUNDARY)	7929.00	120	4.45	2282.55
SECTION 4 (U.S.OF BRIDGE)	5880.00	120	3.07	2251.41
SECTION 3 (U.S.OF BRIDGE)	4112.00	120	3.41	2229.94
UPSTREAM BRIDGE FACE	4018J CULV U	120	4.64	2229.94
DWNSTREAM BRIDGE FACE	4018J CULV D	120	4.99	2229.60
SECTION 2 (D.S.OF BRIDGE)	4008.00	120	3.06	2229.60
SECTION 1 (D.S.BOUNDARY)	3057.00	120	4.54	2219.11


HYDRAULIC DATA SHEET

**SH 86
 DRAW**

NOT TO SCALE
 Texas Department of Transportation
 PAGE 1 OF 2

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST		COUNTY	SHEET NO.
CHS		HALL	54

DATE: 8/1/2023 1:34:34 PM
 FILE: I:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\General\Hydraulic Data @D-ew.dgn

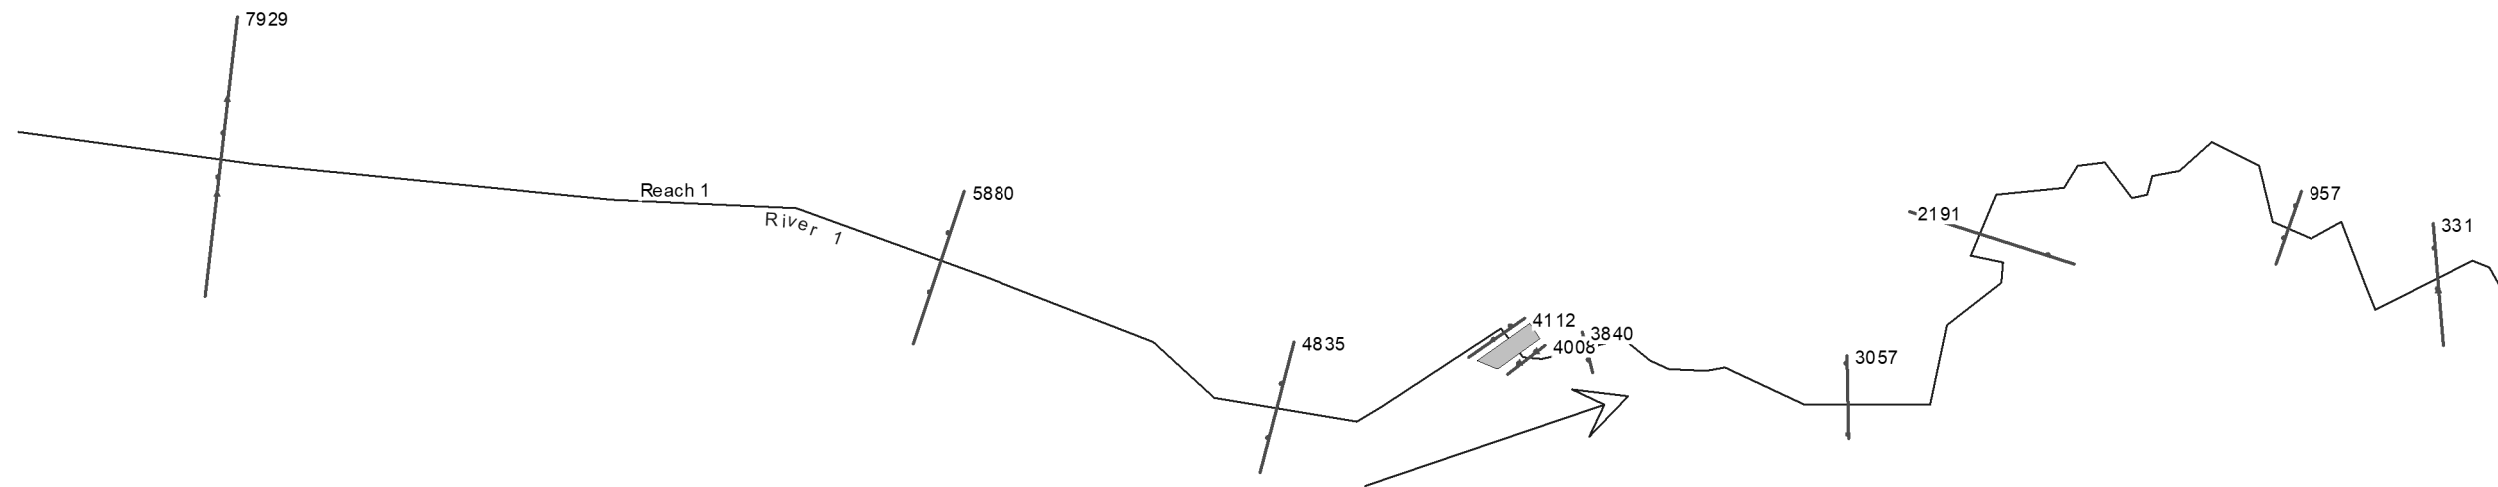

Charles B. Steed, P.E.


08/03/2023

HYDRAULIC DATA SHEET

**SH 86
 DRAW**


NOT TO SCALE
 Texas Department of Transportation
 PAGE 2 OF 2

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY		SHEET NO.
CHS	HALL		55

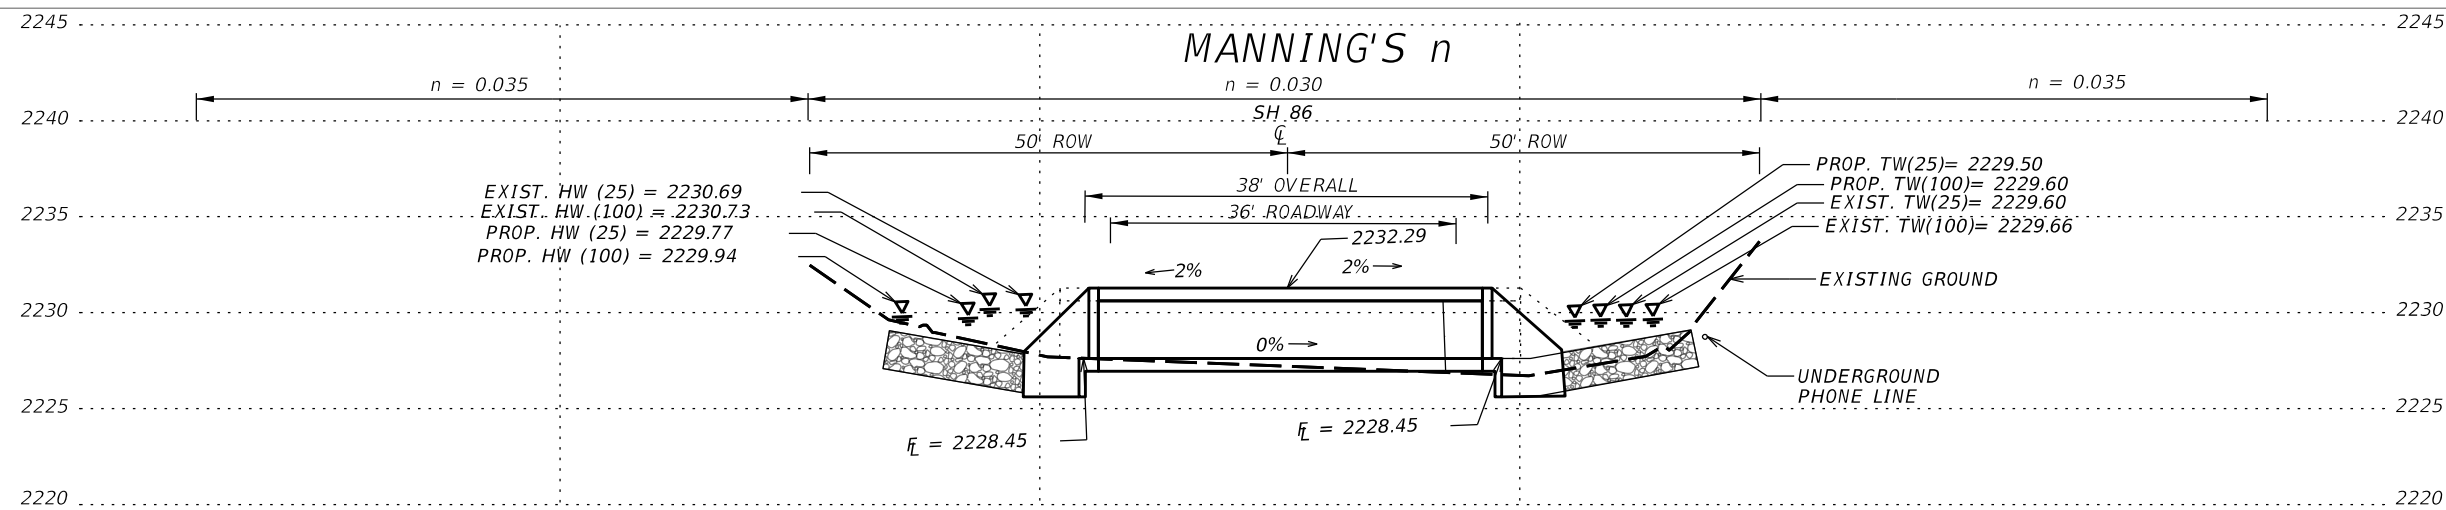


DATE: 6/10/2022 11:23:10 AM
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\3D\DESIGN PROJECTS\SH_86\4 - Design\Master Design Files\Sheet Boundary Container\SH86_CONTAINER_CULVERTLAYOUT.dgn

NOTE:
CONTRACTOR SHALL VERIFY ALL
DIMENSIONS IN THE FIELD PRIOR
TO ORDERING MATERIALS.

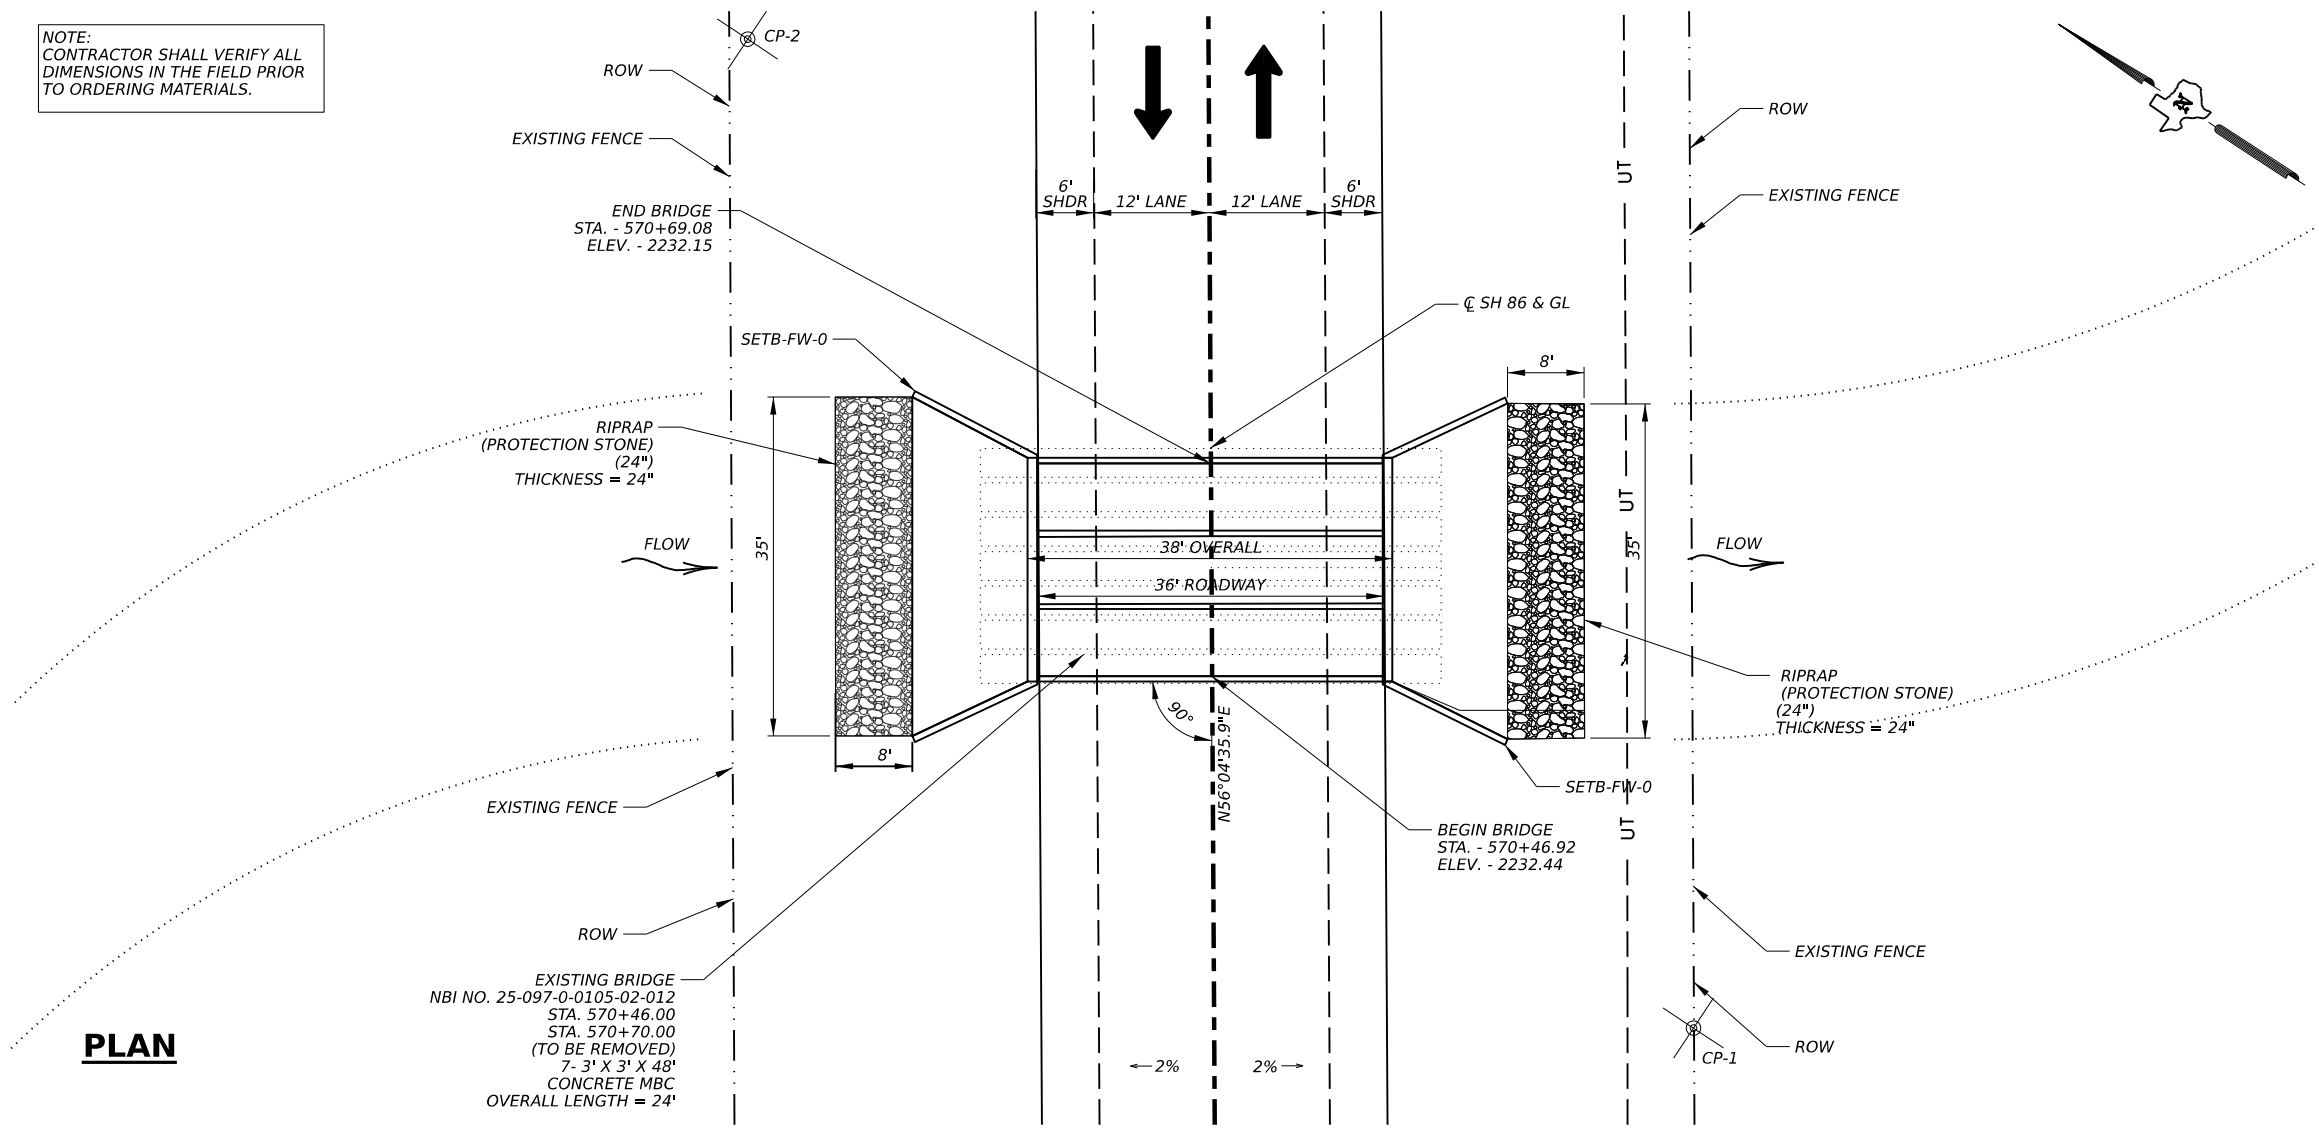

Charles B. Steed, P.E.
 08/03/2023

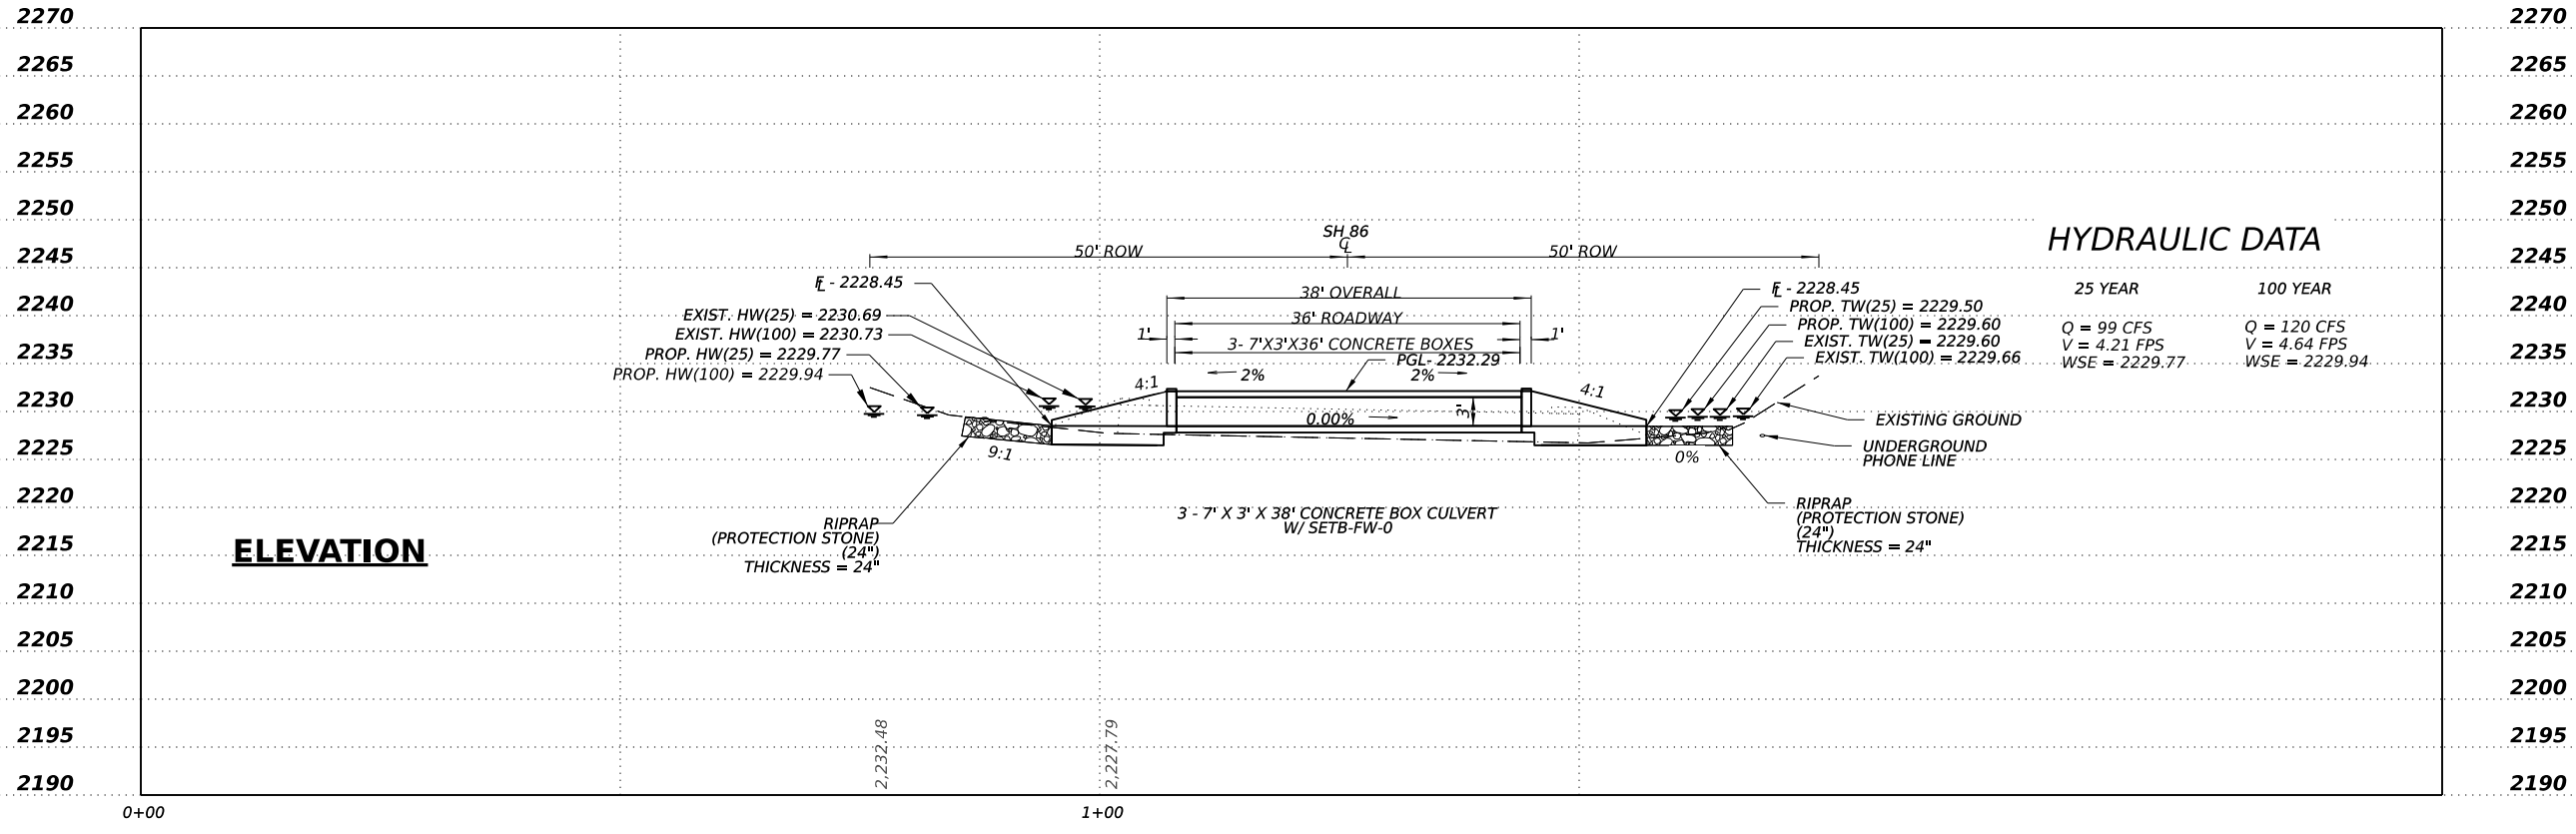

CULVERT LAYOUT
SH 86 @ DRAW

NBI NO. 25-097-0-0105-02-063
 DESIGN SPEED = 70 MPH
 ADT (2022) - 520
 ADT (2042) - 720
 FUNCTIONAL CLASS : RURAL MAJOR COLLECTOR

Texas Department of Transportation

STA. 570+46.92
 TO
 STA. 570+69.08


SCALE
 H - 1" = 20'
 V - 1" = 20'

SHEET 1 OF 1


CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86
DIST	COUNTY	SHEET NO.	
CHS	HALL	56	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

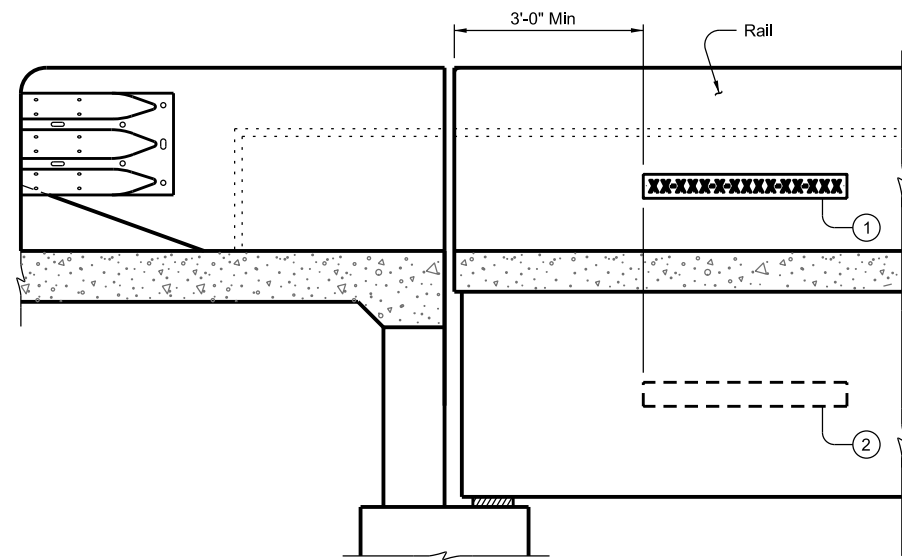

ELEVATION

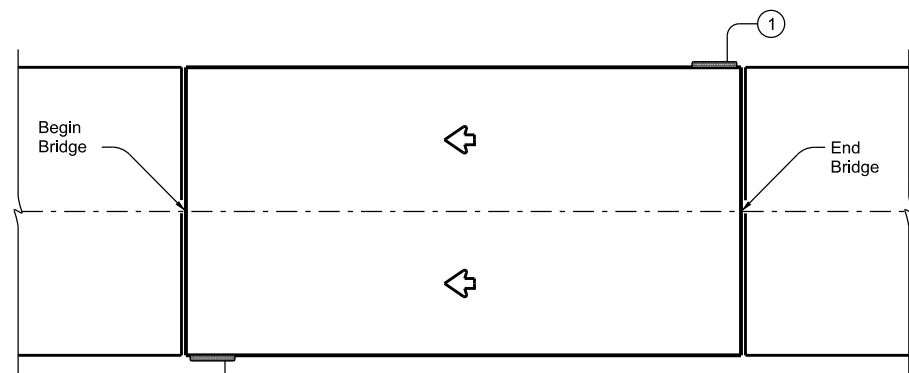


1 3

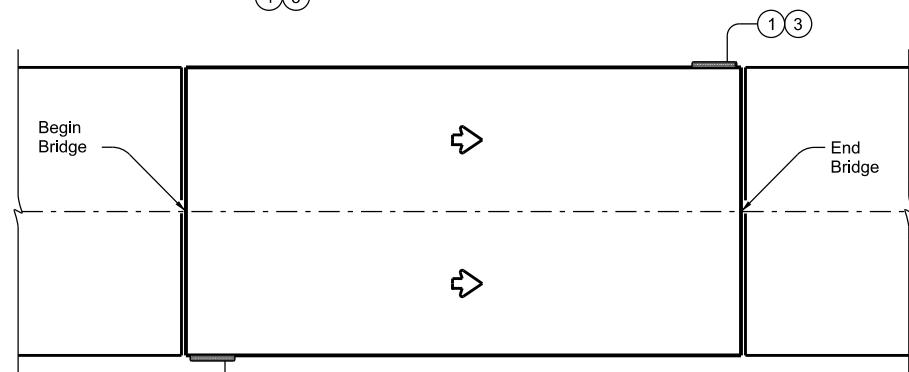


1 3


BRIDGE SIGN LOCATIONS

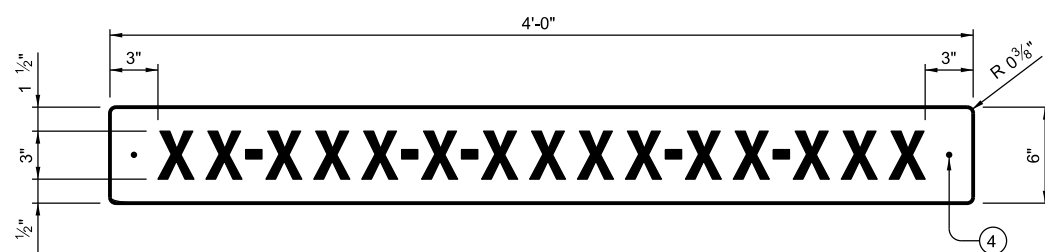

BRIDGE IDENTIFICATION SIGN

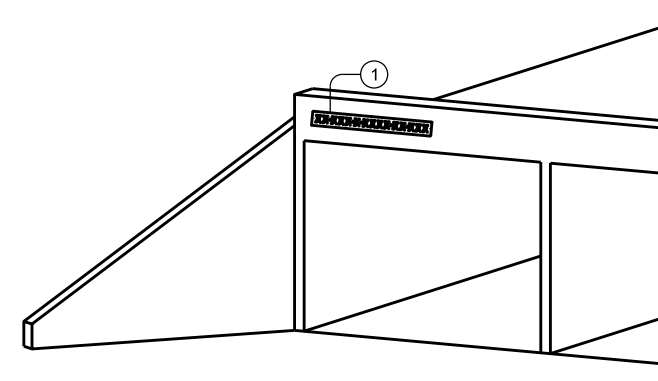


DETAIL "A"

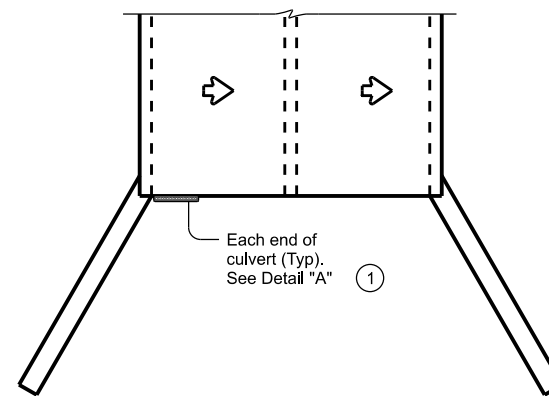

PLAN

BRIDGE CLASS CULVERT SIGN PLACEMENT

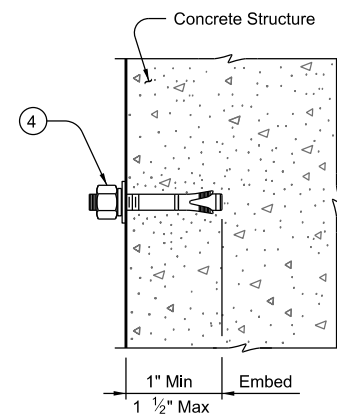

ANCHOR DETAIL

SHEETING REQUIREMENTS

Usage	Color	Sign Face Material
Background	White	Type B or C Sheeting
Letters and Symbols	Black	Type B or C Sheeting

- 1 Bridge identification sign location
- 2 Alternate sign placement location for exterior concrete beams.
- 3 If adjacent bridges are less than 2 feet apart, these signs may be omitted.
- 4 1/4" Diameter stainless steel expansion anchor with hex nut, washer, and spring-lock washer.

SIGN NOTES:

Standard sign designs can be found in the Standard Highway Sign Designs for Texas (SHSD).

Use the Clearview Alphabet CV-2W for the letters and symbols.

MATERIAL NOTES:

Provide lateral spacing between letters and numerals conforming with the SHSD, and any approved changes thereto. Provide a balanced appearance when spacing is not shown.

Provide aluminum sign blanks with a minimum thickness of 0.080" that meet the requirements of DMS-7110.

Provide sign face materials that meet the requirements of DMS-8300 and the sheeting requirements shown in the table.

Provide 1/4" diameter stainless steel expansion anchors with one hex head nut, one flat washer, and one helical spring-lock washer each.

Use torque controlled mechanical expansion anchors that are approved for use in cracked concrete by the International Code Council, Evaluation Service (ICC-ES). Provide anchor products that have a designated ICC-ES Evaluation Report number. The approval status must be maintained on the ICC-ES website under Division 031600 for Concrete Anchors.

Unless otherwise approved by the Engineer: do not use adhesive anchors; do not use expansion anchors that are not included in the ICC-ES approval list; and do not use expansion anchors that are only approved for use in uncracked concrete.

Use anchors manufactured with stainless steel expansion wedges. Anchors manufactured with carbon steel expansion wedges are not allowed. Anchor bodies can be either zinc-plated carbon steel or stainless steel. For application in marine environments, provide both stainless steel anchor bodies and expansion wedges.

GENERAL NOTES:

Prior to hole drilling, locate rebar to ensure clearing of existing reinforcement and/or strands.

Prior to installation, obtain approval of sign locations from the Engineer. Avoid placement of sign over travel lanes and pedestrian walkways. Submit proposed installation method to Engineer prior to beginning work. Install anchors as shown on plans and in accordance with the anchor manufacturer's published installation instructions.


Do not install anchors sections of members under tension.

For new construction, the signs and anchors are subsidiary to the bridge. For installations on existing structures, the signs and anchors are paid under Item 442, "Metal for Structures." Each sign weighs 28 lbs.


<p>NBIS BRIDGE IDENTIFICATION SIGN STANDARD</p>			
<p>NBIS</p>			
FILE:	DN: TAR	CK: TxDOT	DW: JER
©TxDOT	March 2023	REVISIONS	SH 70/86
0105	02	023, ETC.	HIGHWAY
DIST	COUNTY	SHEET NO.	
CHS	HALL	58	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/2/2023 9:29:33 AM
 FILE: T:\CHSD\DESIGN\PROJECTS\HALL\0105-02-023 (SH_86_Rehab)\Plan_Sheets\STANDARDS\Cu\We\H\ST\0105-02-023-19.dwg

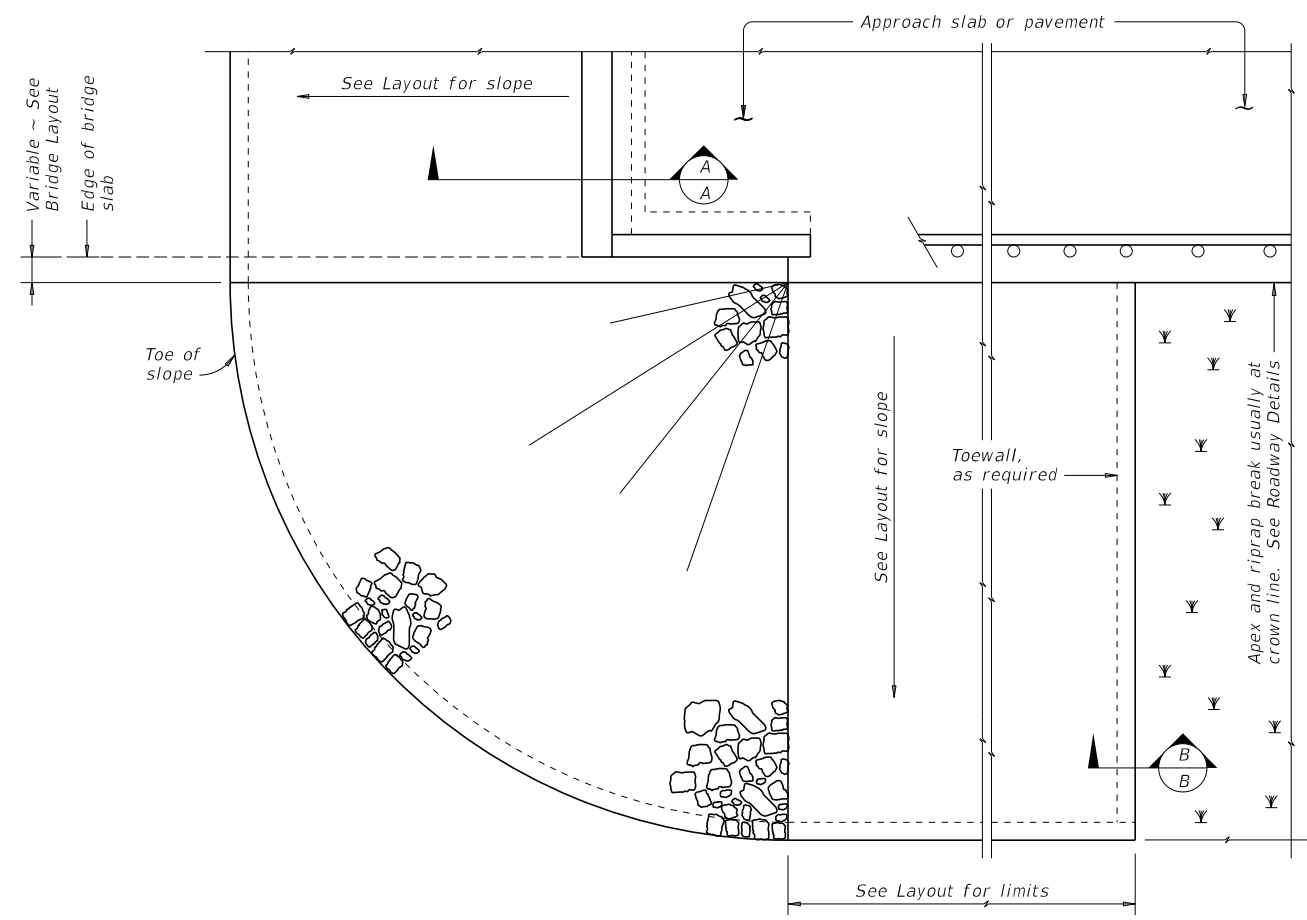


PLAN

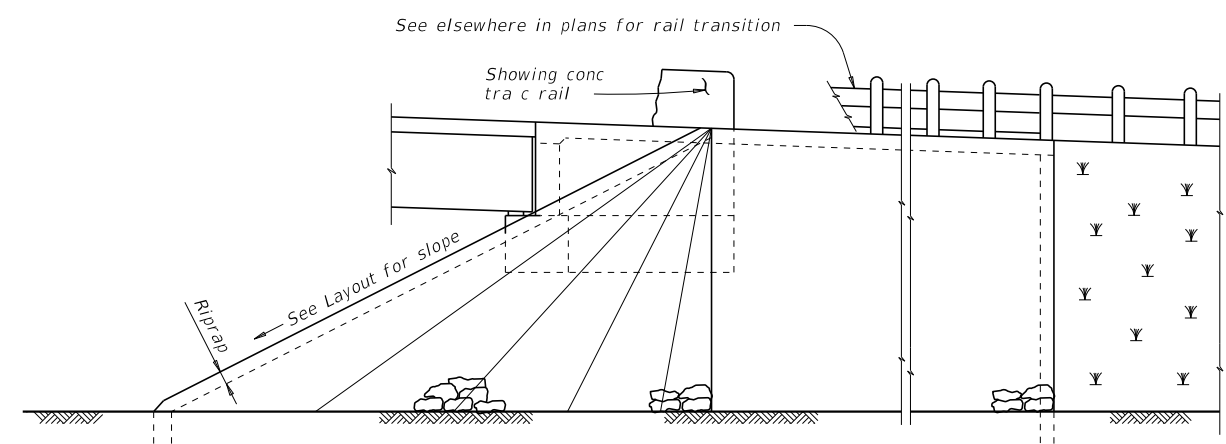

ELEVATION

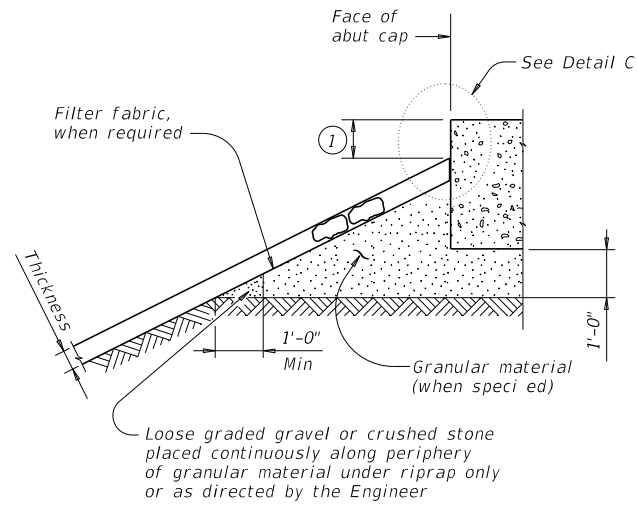


SECTION A-A AT CAP

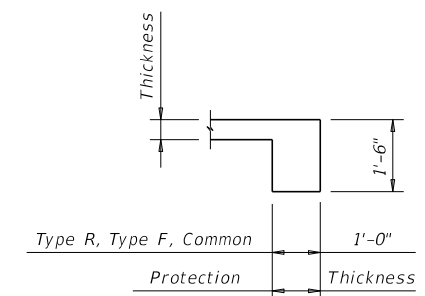


SECTION B-B

Provide toewall when shoulder drain is located adjacent to limits of stone riprap. Omit toewall when thickness of protection riprap is greater than 18".

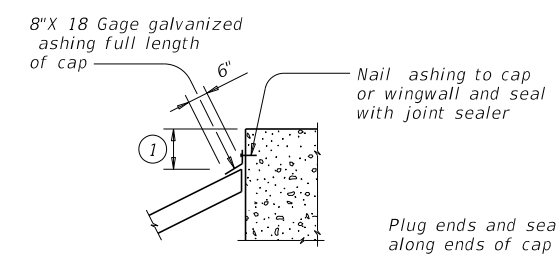

CAP OPTION A

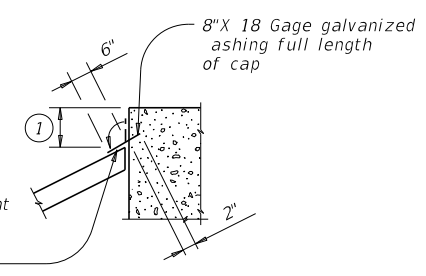

CAP OPTION B

DETAIL C

① Top of cap to top of riprap dimension varies as directed by the Engineer. Provide 9" Min for beam/slab type bridges and 1'-6" for slab span, box beam, or slab beam bridges.


GENERAL NOTES:
 Refer to Item 432, "Riprap" for stone size and gradation, and construction details. See Layout for limits and thickness of riprap specified.
 See elsewhere in plans for locations and details of shoulder drains.

SHEET 1 OF 2


		Bridge Division Standard	
<h1>STONE RIPRAP</h1>			
<h2>SRR</h2>			
FILE: srrstd1-19.dgn	DN: AES	CK: JGD	DW: BWH
©TxDOT April 2019	CONT	SECT	JOB
REVISIONS	0105	02	023, ETC.
	DIST	COUNTY	SHEET NO.
CHS	HALL		59

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/2/2023
 FILE: T:\CHSDDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\CIP\CHS\MC7-10.dwg

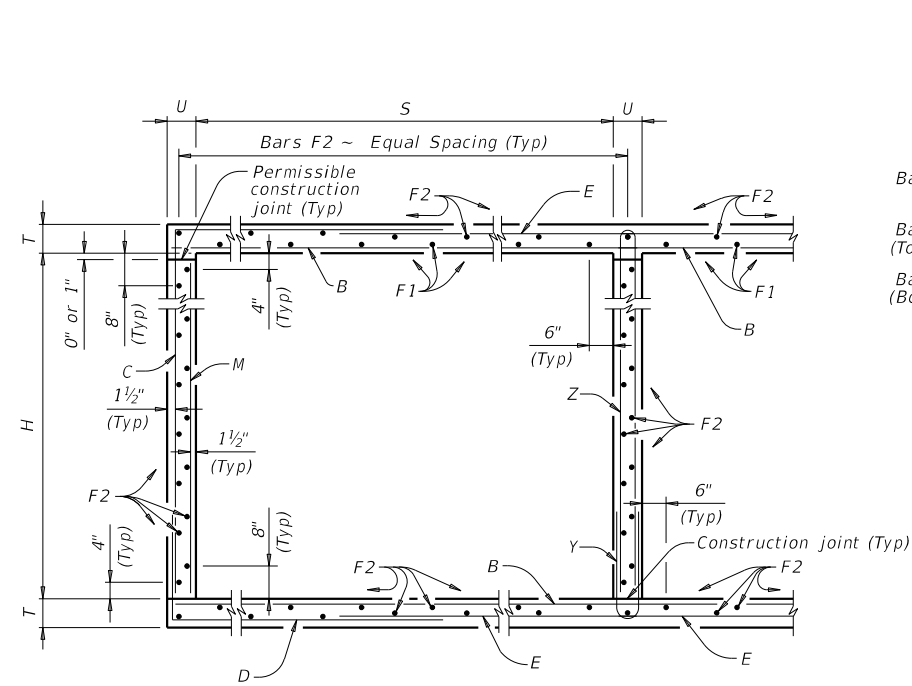

TYPICAL SECTION

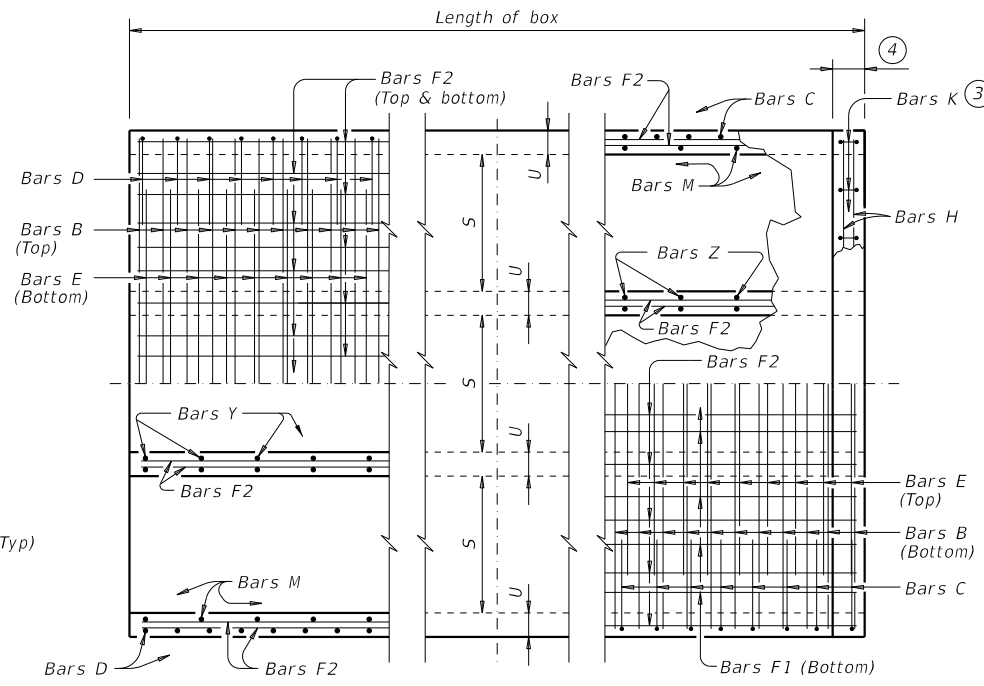


BOTTOM SLAB
PART PLANS
TOP SLAB

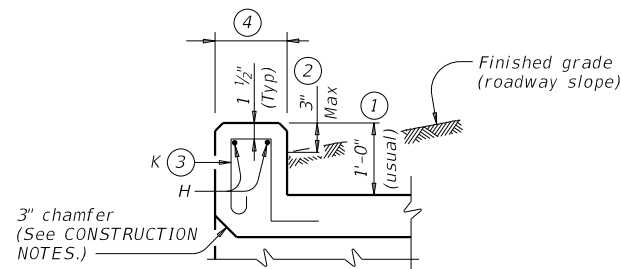

SECTION THRU CURB

TABLE OF BAR DIMENSIONS		
H	"X"	"Y"
3'-0"	3'-6 1/2"	4'-5"
4'-0"	4'-6 1/2"	4'-5"
5'-0"	5'-6 1/2"	4'-5"
6'-0"	6'-6 1/2"	4'-5"
7'-0"	7'-6 1/2"	4'-5"

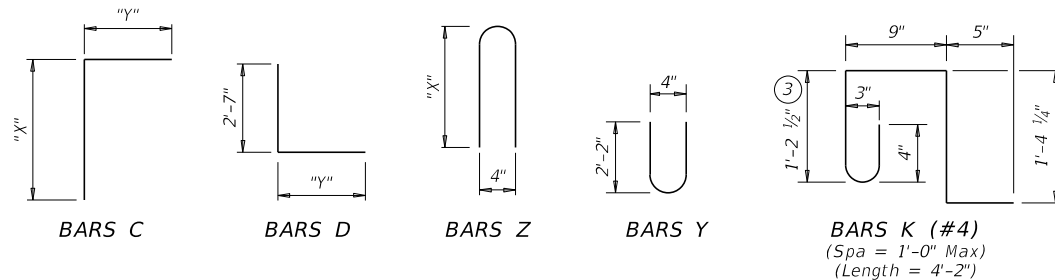

- 0" Min to 5'-0" Max. Estimated curb heights are shown elsewhere in the plans. For structures with pedestrian rail or curbs taller than 1'-0", refer to the Extended Curb Details (ECD) standard sheet. For structures with T631 or T631LS bridge rail, refer to the Mounting Details for T631 & T631LS Rails (T631-CM) standard sheet. Refer to the Rail Anchorage Curb (RAC) standard sheet for structures with bridge rail other than T631 or T631LS.
- For vehicle safety, the following requirements must be met:
 - For structures without bridge rail, construct curbs no more than 3" above finished grade.
 - For structures with bridge rail, construct curbs flush with finished grade. Reduce curb heights, if necessary, to meet the above requirements. No changes will be made in quantities and no additional compensation will be allowed for this work.
- For curbs less than 1'-0" high, tilt Bars K or reduce bar height as necessary to maintain cover. For curbs less than 3" high, Bars K may be omitted.
- 1'-0" typical. 2'-3" when the Rail Anchorage Curb (RAC) standard sheet is referred to elsewhere in the plans.

The Contractor may replace Bars B, C, D, E, F1, F2, M, Y, and/or Z with deformed welded wire reinforcement (WWR) meeting the requirements of ASTM A1064. The area of required reinforcement may be reduced by the ratio of 60 ksi / 70 ksi. Spacing of WWR is limited to 4" Min and 18" Max. When required, provide lap splices in the WWR of the same length required for the equivalent bar size, rounded up for wire sizes between conventional bar sizes. The lap length required for WWR is never less than the lap length required for uncoated #4 bars.

Example conversion: Replacing No. 6 Gr 60 at 6" Spacing with WWR
 Required WWR = (0.44 sq. in. per 0.5 ft.) x (60 ksi / 70 ksi) = 0.755 sq. in. per ft.
 If D30.6 wire is used to meet the 0.755 sq. in. per ft. requirement in this example, the required spacing = (0.306 sq. in.) / (0.755 sq. in. per ft.) x (12 in. per ft.) = 4.86" Max spacing. Required lap length for the provided D30.6 wire is 2'-1" (the same minimum lap length required for uncoated #5 bars, as listed under MATERIAL NOTES).

CONSTRUCTION NOTES:

Do not use permanent forms.
 Chamfer the bottom edge of the top slab 3" at the entrance.
 Optionally, raise construction joints shown at the low line by a maximum of 6". If this option is taken, Bars M may be cut or raised, Bars C and D may be reversed, and Bars Y and Z may be reversed.

MATERIAL NOTES:

Provide Grade 60 reinforcing steel.
 Provide galvanized reinforcing steel if required elsewhere in the plans.
 Provide Class C concrete (f'c = 3,600 psi) for culvert barrel and curb, with the following exceptions: provide Class S concrete (f'c = 4,000 psi) for top slabs of:
 • culverts with overlay,
 • culverts with 1-to-2 course surface treatment, or
 • culverts with the top slab as the final riding surface.
 Provide bar laps, where required, as follows:
 • Uncoated or galvanized ~ #4 = 1'-8" Min
 • Uncoated or galvanized ~ #5 = 2'-1" Min
 • Uncoated or galvanized ~ #6 = 2'-6" Min

GENERAL NOTES:

Designed according to AASHTO LRFD Bridge Design Specifications for the range of H heights shown.
 See the Multiple Box Culverts Cast-In-Place Miscellaneous Detail (MC-MD) standard sheet for details pertaining to skewed ends, angle sections, and lengthening.

Cover dimensions are clear dimensions, unless noted otherwise.
 Reinforcing bar dimensions shown are out-to-out of bar.

HL93 LOADING SHEET 1 OF 2



**MULTIPLE BOX CULVERTS
 CAST-IN-PLACE
 7'-0" SPAN
 0' TO 10' FILL**


MC-7-10

FILE: mc710ste-20.dgn	DN: TBE	CK: BMP	DW: TxDOT	CK: TxDOT
©TxDOT February 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	0105	02	023, ETC.	SH 70/86
DIST	COUNTY	SHEET NO.		
CHS	HALL	61		

DATE: 8/2/2023 9:34:26 AM
 FILE: T:\CHSIDE5\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Culverts\FRANS\HNE\02023\p1 for incorrect results or damages resulting from its use.
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions.


NUMBER OF SPANS	SECTION DIMENSIONS				BILLS OF REINFORCING STEEL (For Box Length = 40 feet)																																QUANTITIES												
					Bars B				Bars C & D				Bars E				Bars F1 ~ #4				Bars F2 ~ #4				Bars M ~ #4				Bars Y & Z ~ #4				Bars H 4 ~ #4		Bars K		Per Foot of Barrel		Curb		Total								
	S	H	T	U	No.	Size	Spa	Length	Wt	No.	Size	Spa	Bars C		Bars D		No.	Size	Spa	Length	Wt	No.	Spa	Length	Wt	No.	Spa	Length	Wt	No.	Spa	Length	Wt	No.	Spa	Bars Y		Bars Z		Length	Wt	No.	Wt	Conc (CY)	Reinf (Lb)	Conc (CY)	Reinf (Lb)	Conc (CY)	Reinf (Lb)
2	7'-0"	3'-0"	8"	7"	108	#6	9"	15'-6"	2,514	162	#5	6"	7'-11"	1,338	7'-0"	1,183	108	#6	9"	11'-5"	1,852	10	18"	39'-9"	266	54	18"	39'-9"	1,434	108	9"	3'-0"	216	54	9"	4'-7"	165	7'-3"	262	15'-6"	41	34	95	0.972	230.8	1.2	136	40.0	9,366
3	7'-0"	3'-0"	8"	7"	108	#6	9"	23'-1"	3,744	162	#5	6"	7'-11"	1,338	7'-0"	1,183	108	#6	9"	19'-0"	3,082	15	18"	39'-9"	398	77	18"	39'-9"	2,045	108	9"	3'-0"	216	108	9"	4'-7"	331	7'-3"	523	23'-1"	62	50	139	1.412	321.5	1.7	201	58.2	13,061
4	7'-0"	3'-0"	8"	7"	108	#6	9"	30'-8"	4,975	162	#5	6"	7'-11"	1,338	7'-0"	1,183	108	#6	9"	26'-7"	4,312	20	18"	39'-9"	531	100	18"	39'-9"	2,655	108	9"	3'-0"	216	162	9"	4'-7"	496	7'-3"	785	30'-8"	82	64	178	1.851	412.3	2.3	260	76.3	16,751
5	7'-0"	3'-0"	8"	7"	108	#6	9"	38'-3"	6,205	162	#5	6"	7'-11"	1,338	7'-0"	1,183	108	#6	9"	34'-2"	5,542	25	18"	39'-9"	664	123	18"	39'-9"	3,266	108	9"	3'-0"	216	216	9"	4'-7"	661	7'-3"	1,046	38'-3"	102	80	223	2.290	503.0	2.8	325	94.4	20,446
6	7'-0"	3'-0"	8"	7"	108	#6	9"	45'-10"	7,435	162	#5	6"	7'-11"	1,338	7'-0"	1,183	108	#6	9"	41'-9"	6,773	30	18"	39'-9"	797	146	18"	39'-9"	3,877	108	9"	3'-0"	216	270	9"	4'-7"	827	7'-3"	1,308	45'-10"	122	94	262	2.729	593.9	3.4	384	112.6	24,138
2	7'-0"	4'-0"	8"	7"	108	#6	9"	15'-6"	2,514	162	#5	6"	8'-11"	1,507	7'-0"	1,183	108	#6	9"	11'-5"	1,852	10	18"	39'-9"	266	54	18"	39'-9"	1,434	108	9"	4'-0"	289	54	9"	4'-7"	165	9'-3"	334	15'-6"	41	34	95	1.037	238.6	1.2	136	42.6	9,680
3	7'-0"	4'-0"	8"	7"	108	#6	9"	23'-1"	3,744	162	#5	6"	8'-11"	1,507	7'-0"	1,183	108	#6	9"	19'-0"	3,082	15	18"	39'-9"	398	77	18"	39'-9"	2,045	108	9"	4'-0"	289	108	9"	4'-7"	331	9'-3"	667	23'-1"	62	50	139	1.498	331.2	1.7	201	61.6	13,447
4	7'-0"	4'-0"	8"	7"	108	#6	9"	30'-8"	4,975	162	#5	6"	8'-11"	1,507	7'-0"	1,183	108	#6	9"	26'-7"	4,312	20	18"	39'-9"	531	100	18"	39'-9"	2,655	108	9"	4'-0"	289	162	9"	4'-7"	496	9'-3"	1,001	30'-8"	82	64	178	1.959	423.7	2.3	260	80.6	17,209
5	7'-0"	4'-0"	8"	7"	108	#6	9"	38'-3"	6,205	162	#5	6"	8'-11"	1,507	7'-0"	1,183	108	#6	9"	34'-2"	5,542	25	18"	39'-9"	664	123	18"	39'-9"	3,266	108	9"	4'-0"	289	216	9"	4'-7"	661	9'-3"	1,335	38'-3"	102	80	223	2.420	516.3	2.8	325	99.6	20,977
6	7'-0"	4'-0"	8"	7"	108	#6	9"	45'-10"	7,435	162	#5	6"	8'-11"	1,507	7'-0"	1,183	108	#6	9"	41'-9"	6,773	30	18"	39'-9"	797	146	18"	39'-9"	3,877	108	9"	4'-0"	289	270	9"	4'-7"	827	9'-3"	1,668	45'-10"	122	94	262	2.881	608.9	3.4	384	118.6	24,740
2	7'-0"	5'-0"	8"	7"	108	#6	9"	15'-6"	2,514	162	#5	6"	9'-11"	1,676	7'-0"	1,183	108	#6	9"	11'-5"	1,852	10	18"	39'-9"	266	60	18"	39'-9"	1,593	108	9"	5'-0"	361	54	9"	4'-7"	165	11'-3"	406	15'-6"	41	34	95	1.102	250.4	1.2	136	45.2	10,152
3	7'-0"	5'-0"	8"	7"	108	#6	9"	23'-1"	3,744	162	#5	6"	9'-11"	1,676	7'-0"	1,183	108	#6	9"	19'-0"	3,082	15	18"	39'-9"	398	85	18"	39'-9"	2,257	108	9"	5'-0"	361	108	9"	4'-7"	331	11'-3"	812	23'-1"	62	50	139	1.584	346.1	1.7	201	65.1	14,045
4	7'-0"	5'-0"	8"	7"	108	#6	9"	30'-8"	4,975	162	#5	6"	9'-11"	1,676	7'-0"	1,183	108	#6	9"	26'-7"	4,312	20	18"	39'-9"	531	110	18"	39'-9"	2,921	108	9"	5'-0"	361	162	9"	4'-7"	496	11'-3"	1,217	30'-8"	82	64	178	2.067	441.8	2.3	260	85.0	17,932
5	7'-0"	5'-0"	8"	7"	108	#6	9"	38'-3"	6,205	162	#5	6"	9'-11"	1,676	7'-0"	1,183	108	#6	9"	34'-2"	5,542	25	18"	39'-9"	664	135	18"	39'-9"	3,585	108	9"	5'-0"	361	216	9"	4'-7"	661	11'-3"	1,623	38'-3"	102	80	223	2.549	537.5	2.8	325	104.8	21,825
6	7'-0"	5'-0"	8"	7"	108	#6	9"	45'-10"	7,435	162	#5	6"	9'-11"	1,676	7'-0"	1,183	108	#6	9"	41'-9"	6,773	30	18"	39'-9"	797	160	18"	39'-9"	4,248	108	9"	5'-0"	361	270	9"	4'-7"	827	11'-3"	2,029	45'-10"	122	94	262	3.032	633.2	3.4	384	124.7	25,713
2	7'-0"	6'-0"	8"	7"	108	#6	9"	15'-6"	2,514	162	#5	6"	10'-11"	1,845	7'-0"	1,183	108	#6	9"	11'-5"	1,852	10	18"	39'-9"	266	66	18"	39'-9"	1,752	108	9"	6'-0"	433	54	9"	4'-7"	165	13'-3"	478	15'-6"	41	34	95	1.167	262.2	1.2	136	47.8	10,624
3	7'-0"	6'-0"	8"	7"	108	#6	9"	23'-1"	3,744	162	#5	6"	10'-11"	1,845	7'-0"	1,183	108	#6	9"	19'-0"	3,082	15	18"	39'-9"	398	93	18"	39'-9"	2,469	108	9"	6'-0"	433	108	9"	4'-7"	331	13'-3"	956	23'-1"	62	50	139	1.671	361.0	1.7	201	68.6	14,642
4	7'-0"	6'-0"	8"	7"	108	#6	9"	30'-8"	4,975	162	#5	6"	10'-11"	1,845	7'-0"	1,183	108	#6	9"	26'-7"	4,312	20	18"	39'-9"	531	120	18"	39'-9"	3,186	108	9"	6'-0"	433	162	9"	4'-7"	496	13'-3"	1,434	30'-8"	82	64	178	2.175	459.9	2.3	260	89.3	18,655
5	7'-0"	6'-0"	8"	7"	108	#6	9"	38'-3"	6,205	162	#5	6"	10'-11"	1,845	7'-0"	1,183	108	#6	9"	34'-2"	5,542	25	18"	39'-9"	664	147	18"	39'-9"	3,903	108	9"	6'-0"	433	216	9"	4'-7"	661	13'-3"	1,912	38'-3"	102	80	223	2.679	558.7	2.8	325	110.0	22,673
6	7'-0"	6'-0"	8"	7"	108	#6	9"	45'-10"	7,435	162	#5	6"	10'-11"	1,845	7'-0"	1,183	108	#6	9"	41'-9"	6,773	30	18"	39'-9"	797	174	18"	39'-9"	4,620	108	9"	6'-0"	433	270	9"	4'-7"	827	13'-3"	2,390	45'-10"	122	94	262	3.183	657.6	3.4	384	130.7	26,687
2	7'-0"	7'-0"	8"	7"	108	#6	9"	15'-6"	2,514	162	#5	6"	11'-11"	2,014	7'-0"	1,183	108	#6	9"	11'-5"	1,852	10	18"	39'-9"	266	66	18"	39'-9"	1,752	108	9"	7'-0"	505	54	9"	4'-7"	165	15'-3"	550	15'-6"	41	34	95	1.231	270.0	1.2	136	50.4	10,937
3	7'-0"	7'-0"	8"	7"	108	#6	9"	23'-1"	3,744	162	#5	6"	11'-11"	2,014	7'-0"	1,183	108	#6	9"	19'-0"	3,082	15	18"	39'-9"	398	93	18"	39'-9"	2,469	108	9"	7'-0"	505	108	9"	4'-7"	331	15'-3"	1,100	23'-1"	62	50	139	1.757	370.7	1.7	201	72.0	15,027
4	7'-0"	7'-0"	8"	7"	108	#6	9"	30'-8"	4,975	162	#5	6"	11'-11"	2,014	7'-0"	1,183	108	#6	9"	26'-7"	4,312	20	18"	39'-9"	531	120	18"	39'-9"	3,186	108	9"	7'-0"	505	162	9"	4'-7"	496	15'-3"	1,650	30'-8"	82	64	178	2.283	471.3	2.3	260	93.6	19,112
5	7'-0"	7'-0"	8"	7"	108	#6	9"	38'-3"	6,205	162	#5	6"	11'-11"	2,014	7'-0"	1,183	108	#6	9"	34'-2"	5,542	25	18"	39'-9"	664	147	18"	39'-9"	3,903	108	9"	7'-0"	505	216	9"	4'-7"	661	15'-3"	2,200	38'-3"	102	80	223	2.809	571.9	2.8	325	115.2	23,202
6	7'-0"	7'-0"	8"	7"	108	#6	9"	45'-10"	7,435	162	#5	6"	11'-11"	2,014	7'-0"	1,183	108	#6	9"	41'-9"	6,773	30	18"	39'-9"	797	174	18"	39'-9"	4,620	108	9"	7'-0"	505	270	9"	4'-7"	827	15'-3"	2,750	45'-10"	122	94	262	3.334	672.6	3.4	384	136.8	27,288

HL93 LOADING SHEET 2 OF 2


 Texas Department of Transportation		Bridge Division Standard	
MULTIPLE BOX CULVERTS CAST-IN-PLACE 7'-0" SPAN 0' TO 10' FILL			
MC-7-10			
FILE: mc710ste-20.dgn	DN: TBE	CK: BMP	DW: TxDOT
CTxDOT February 2020	CONT SECT	JOB	HIGHWAY
REVISIONS	0105 02	023, ETC.	SH 70/86
DIST	COUNTY	SHEET NO.	
CHS	HALL	62	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.


DATE: 8/2/2023 9:36:35 AM
 FILE: T:\CHSDDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\COPY\MC-MD\Miscellaneous\MC-MD.dwg

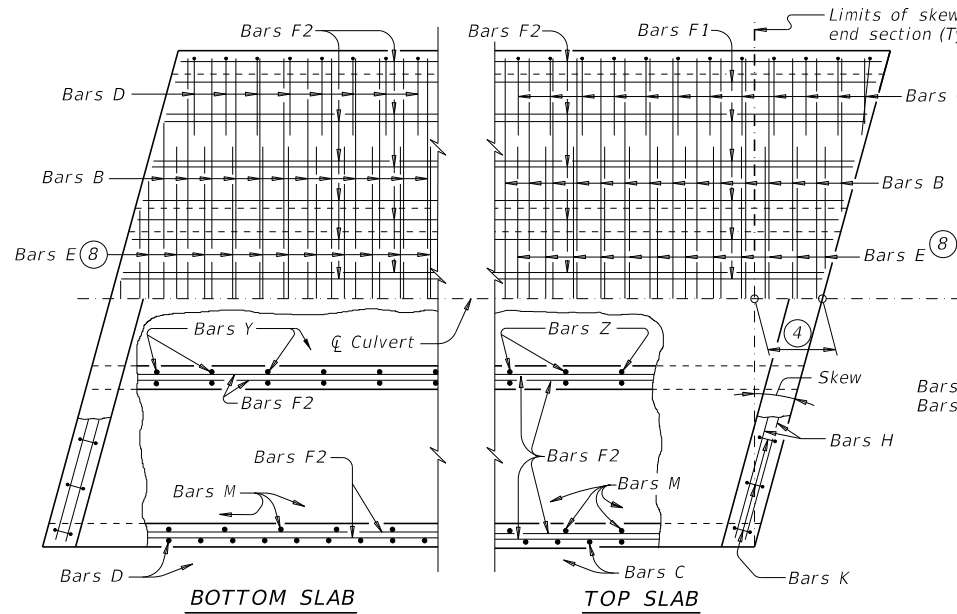


PLAN OF SKEWED ENDS ~ FROM 0° TO 15°

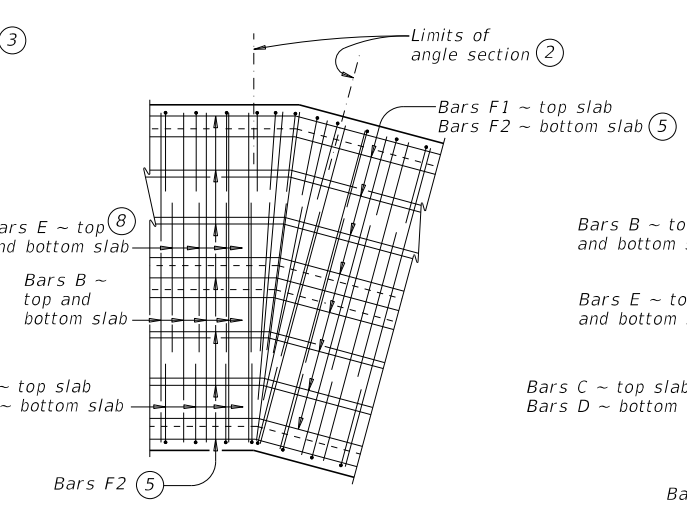


PLAN OF ANGLE SECTION ~ FROM 0° TO 15°

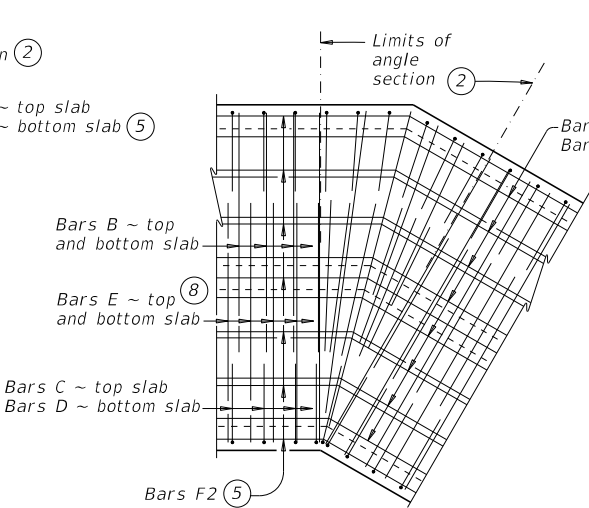

PLAN OF ANGLE SECTION ~ OVER 15° TO 30°

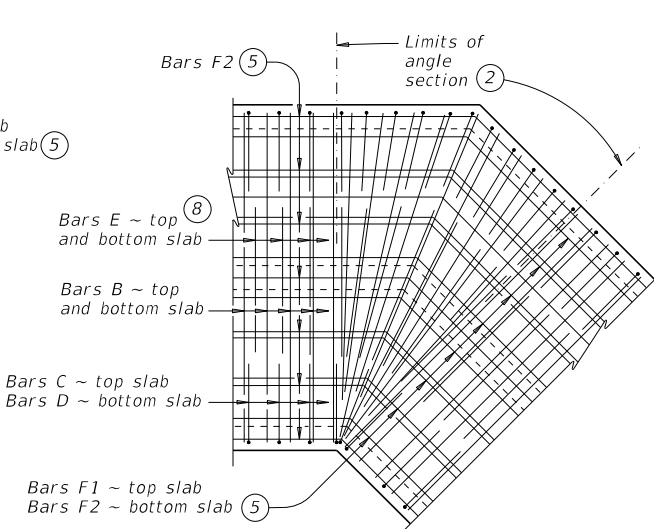

PLAN OF ANGLE SECTION ~ OVER 30° TO 45°

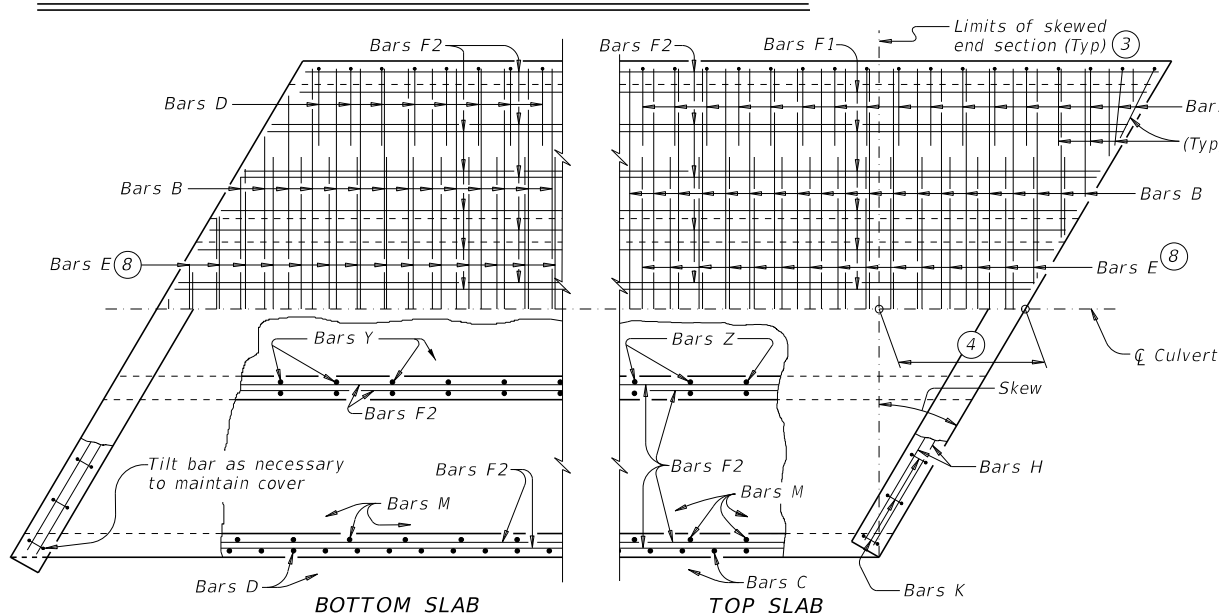

PLAN OF SKEWED ENDS ~ OVER 15° TO 30°


- ① For skewed box culverts with less than 2'-0" of \parallel , break back the top slab to provide a 1'-10" minimum lap of the existing longitudinal bars with the longitudinal bars in the extension.
 For non-skewed box culverts with less than 2'-0" of \parallel and for skewed or non-skewed culverts with a \parallel depth of 2'-0" or greater, break back the top slab to provide a 1'-10" minimum lap of the existing longitudinal bars with the longitudinal bars in the extension. Alternatively, if the box is non-skewed, embed #6 anchor bars with a Type III, Class C, D, E, or F anchor adhesive into the existing walls, top and bottom slab at 1'-6" center-to-center spacing. Minimum embedment depth is 8". Anchor adhesive chosen must be able to achieve a basic bond strength in tension, N_b , of 26.4 kips. Submit signed and sealed calculations or the manufacturer's published literature showing the proposed anchor adhesive's ability to develop this load to the Engineer for approval prior to use. Anchor installation, including hole size, drilling, and clean out, must be in accordance with Item 450, "Railing." Test adhesive anchors in accordance with Item 450.3.3, "Tests." Test 3 anchors per 100 anchors installed.
 Break back wings and apron as necessary to install the extension. Clean and extend the exposed wingwall and apron reinforcing into the extension. When lengthening existing box culverts with dimensions different than current standard dimensions, form horizontal and vertical transitions as directed by the Engineer. Match bottom slabs to maintain an uninterrupted flow line. Field bend existing and new reinforcing into transitions and maintain specified cover requirements. For top slabs of culverts with overlay, with 1-to-2 course surface treatment, or with the top slab as the final riding surface, adjust the "H" dimension to provide a smooth riding surface.
- ② When the spacing between Bars B or Bars E becomes less than half of the normal spacing, cut bars to avoid contact.
- ③ The length of Bars B and Bars E will vary in the skewed end sections.
- ④ $[0.5 \times \text{overall width}] \times [\text{tangent of the skew angle}]$

- ⑤ Place Bars F1 and F2 continuously through the angle section. Bend Bars F1 and F2 to remain parallel to the walls of the box culvert.
- ⑥ When necessary to avoid contact in acute corners, shorten the slab extension leg of Bars C and Bars D to a minimum of 1'-6" for skews of 30° thru 45°.
- ⑦ At the Contractor's option, for skews of 15° or less, place Bars B, C, D, and E parallel to the skewed end while maintaining spacing along centerline of box. Increase lengths of Bars B and Bars E shown on the Multiple Box Culverts Cast-In-Place (MC) standard sheets to accommodate the skew.
- ⑧ Extend Bars E as shown on the MC standard sheet for direct traffic culverts.


CONSTRUCTION NOTES:
 Do not use permanent forms.
 When required, lap Bars H 1'-8" for uncoated or galvanized bars.
 Provide a minimum of 1 1/2" clear cover.

MATERIAL NOTES:
 Provide Grade 60 reinforcing steel.
 Provide galvanized reinforcing steel, if required elsewhere in the plans.
 Provide Class C concrete ($f'_c = 3,600$ psi) with these exceptions:
 provide Class S concrete ($f'_c = 4,000$ psi) for top slabs of culverts with overlay, with 1-to-2 course surface treatment, or with the top slab as the final riding surface.

GENERAL NOTES:
 Designed according to AASHTO LRFD Bridge Design Specifications.
 Refer to Multiple Box Culverts Cast-in-Place (MC) standard sheets for details of straight sections of culvert.
 For skewed sections and angle sections, refer to Multiple Box Culverts Cast-in-Place (MC) standard sheets for slab and wall dimensions, bar sizes, maximum bar spacing, and any other details not shown.
 For skewed ends with curbs, adjust length of Bars H, number of Bars K, curb concrete volume, and reinforcing steel weight by dividing the values shown on the Multiple Box Culverts Cast-In-Place (MC) standard sheets by the cosine of the skew angle.
 Cover dimensions are clear dimensions, unless noted otherwise.

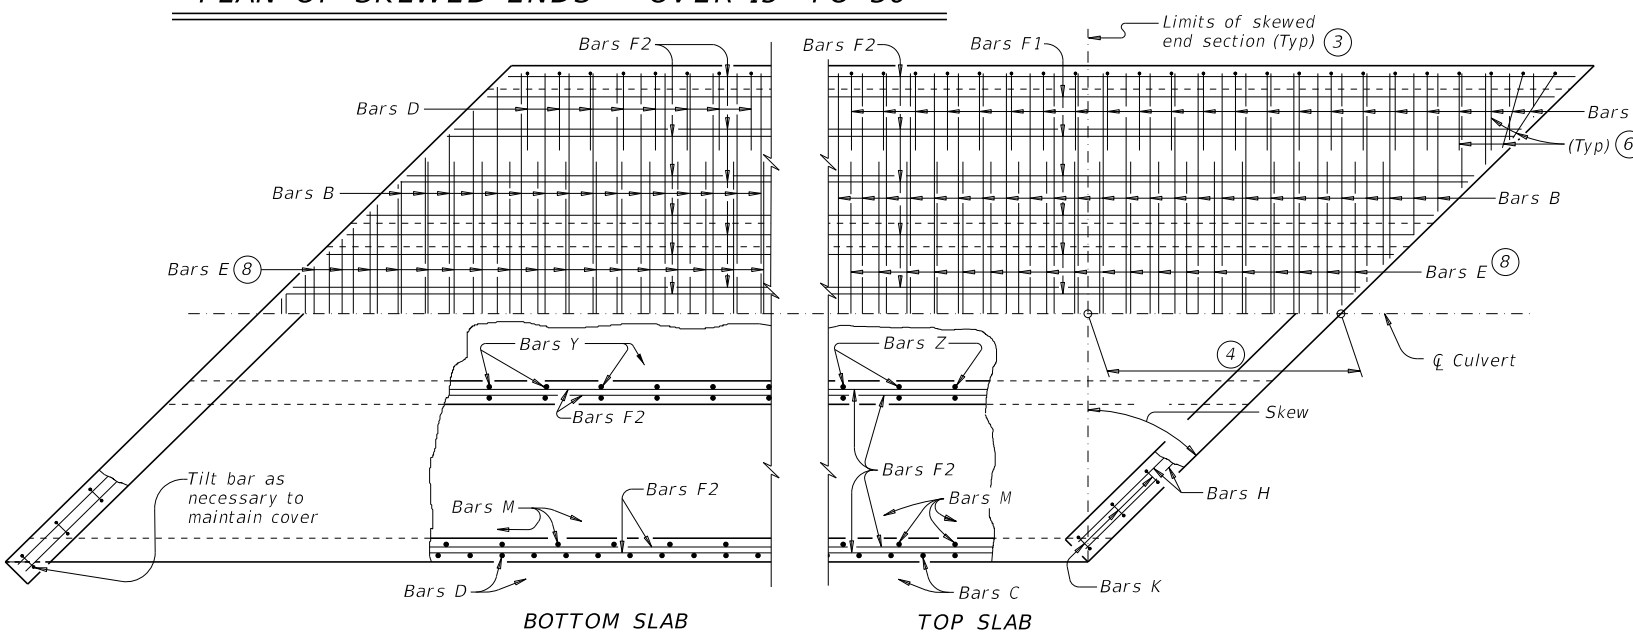

PLAN OF SKEWED ENDS ~ OVER 30° TO 45°

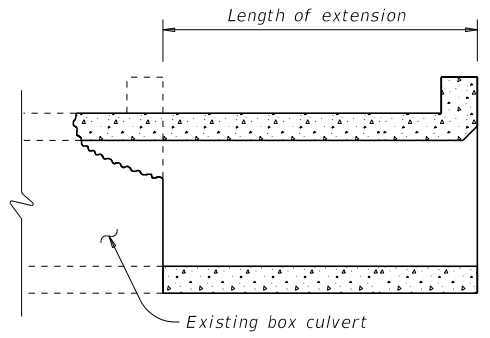

LENGTHENING DETAIL

HL93 LOADING		Bridge Division Standard	
MULTIPLE BOX CULVERTS CAST-IN-PLACE MISCELLANEOUS DETAILS			
MC-MD			
FILE: mc-mdste-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
©TxDOT February 2020	CONT: 0105	SECT: 02	JOB: 023, ETC.
REVISIONS	DIST: CHS		COUNTY: HALL
	SHEET NO. 63		HIGHWAY: SH 70/86

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/2/2023 9:39:22 AM
 FILE: T:\CHSD\DESIGN\PROJECTS\HALL\0105-02-023 (SH_86 Rehab)\Plan Sheets\STANDARDS\Culverts\SETB-FW-0.dwg

TABLE OF DIMENSIONS AND REINFORCING STEEL
(Wings for One Structure End)

Maximum Wingwall Height Hw (9)	Dimensions				Variable Reinforcing				Estimated Quantities per ft of wing length (Two-Wings) (3)	
	W	X	Y	Z	Bars J1		Bars J2		Reinf (Lb/Ft)	Conc (CY/Ft)
2'-6"	2'-5"	1'-0"	9"	7"	#4	1'-0"	#4	1'-0"	33.73	0.248
3'-0"	2'-5"	1'-0"	9"	7"	#4	1'-0"	#4	1'-0"	37.07	0.261
3'-6"	2'-5"	1'-0"	9"	7"	#4	1'-0"	#4	1'-0"	37.74	0.273
4'-0"	2'-5"	1'-0"	9"	7"	#4	1'-0"	#4	1'-0"	38.41	0.285
4'-6"	3'-2"	1'-6"	1'-0"	7"	#4	1'-0"	#4	1'-0"	41.75	0.330
5'-0"	3'-2"	1'-6"	1'-0"	7"	#4	1'-0"	#4	1'-0"	45.09	0.343
5'-6"	3'-2"	1'-6"	1'-0"	7"	#4	1'-0"	#4	1'-0"	45.75	0.355
6'-0"	3'-2"	1'-6"	1'-0"	7"	#4	1'-0"	#4	1'-0"	46.42	0.367
7'-0"	3'-8"	1'-9"	1'-3"	7"	#4	1'-0"	#4	1'-0"	52.77	0.414
8'-0"	4'-2"	2'-0"	1'-6"	8"	#5	1'-0"	#4	1'-0"	60.19	0.486
9'-0"	4'-8"	2'-3"	1'-9"	8"	#4	6"	#4	6"	81.49	0.535
10'-0"	5'-2"	2'-6"	2'-0"	8"	#5	6"	#4	6"	97.25	0.584
11'-0"	5'-8"	2'-9"	2'-3"	8"	#6	6"	#5	6"	133.65	0.634
12'-0"	6'-2"	3'-0"	2'-6"	9"	#7	6"	#5	6"	162.29	0.721

TABLE OF WING WALL REINFORCING (Two-Wings)

Bar	Size	No.	Spa
D	#5	~	1'-0"
E	#4	~	1'-0"
F	#4	~	1'-0"
G	#6	4	~
M	#4	4	~
P	#4	~	1'-0"
R	#5	6	~
V	#4	~	1'-0"

TABLE OF ESTIMATED CULVERT TOEWALL QUANTITIES

Bar	Size	No.	Spa
L	#4	~	1'-6"
Q	#4	1	~
Reinf (Lb/Ft)	2.45		
Conc (CY/Ft)	0.037		

TABLE OF ESTIMATED ANCHOR TOEWALL QUANTITIES

Bar	Size	No.	Spa
K	#4	~	1'-0"
N	#5	6	~
OL	#4	6	~
Reinf (Lb/Ft)	9.82		
Conc (CY/Ft)	0.074		

- Extend Bars P 3'-0" Min into bottom slab of box culvert.
- Adjust to t as necessary to maintain 1 1/2" clear cover and 4" Min between bars.
- Quantities shown are based on an average wing height for two wings (one structure end). To determine total quantities for two wings multiply the tabulated values by Lw.
- Recommended values of slope are: 3:1, 4:1, and 6:1. Provide 3:1 or steeper slope.
- When shown elsewhere on the plans, construct 5" deep concrete riprap. Payment for riprap is as required by Item 432, "Riprap". Unless otherwise shown on the plans or directed by the Engineer, extend construction joints or grooved joints, oriented in the direction of flow, across the full distance of the riprap, at intervals of approximately 20'. When such riprap is provided, the culvert toewall shown in SECTION B-B is not required.
- At Contractor's option, end the culvert toewall flush with wingwall toewall. Adjust reinforcing as needed.
- 3" Min to 5'-0" Max. Estimated curb heights are shown elsewhere in the plans. For structures without railing and curbs taller than 1'-0", refer to the Extend Curb Details (ECD) standard sheet.
- For vehicle safety, reduce curb heights, if necessary, to provide a maximum 3" projection above finished grade. No changes will be made in quantities and no additional compensation will be allowed for this work.
- See Table of Maximum Wing Heights for various slopes. Height is limited based on a 33'-6" maximum safety pipe runner length.

TABLE OF MAXIMUM WING HEIGHTS (9)

Side Slope	Hw Max
3:1	11'-5"
4:1	8'-10"
6:1	6'-1"

WING DIMENSION CALCULATIONS:

$$\begin{aligned}
 Hw &= H + T + C - 0.250' \quad (9) \\
 A &= (Hw - 0.333') (SL) \\
 B &= (A) (\tan 30^\circ) \\
 Lw &= (A) \div \cos 30^\circ \\
 \\
 \text{For cast-in-place culverts:} \\
 Ltw &= (N) (S) + (N + 1) (U) \\
 \text{For precast culverts:} \\
 Ltw &= (N) (2U + S) + (N - 1) (0.500') \\
 \\
 Lc &= (Ltw) - (2B) \\
 Atw &= (Lc) + (2B) \\
 \text{Total Wingwall Area (two wings ~ SF)} \\
 &= (Hw + 0.333') (Lw)
 \end{aligned}$$

Hw = Height of wingwall (feet)
 Atw = Anchor toewall length (feet)
 Lw = Length of wingwall (feet)
 N = Number of culvert barrels
 SL:1 = Side slope ratio (horizontal : 1 vertical)
 Ltw = Culvert toewall length (feet)
 Lc = Culvert curb between wings (feet)

See applicable box culvert standard for H, S, T, and U values.
See Table of Maximum Wall Heights for limits on Hw.


MATERIAL NOTES:

Provide Grade 60 reinforcing steel.
Provide galvanized reinforcing steel if required elsewhere in the plans. Synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) may be used in lieu of steel reinforcing in riprap concrete unless noted otherwise.
Provide Class "C" concrete (f'c = 3,600 psi).
Adjust reinforcing as necessary to provide a minimum clear cover of 1 1/2".
Provide pipe runners and anchor pipes meeting the requirements of ASTM A53 (Type E or S, Gr B), ASTM A500 Gr B, or API 5LX52.
Provide ASTM A307 bolts and nuts.
Provide ASTM A36 steel plates.
Galvanize all steel components, except reinforcing unless required elsewhere in the plans, after fabrication.
Repair galvanizing damaged during transport or construction in accordance with the Item 445, "Galvanizing".
For optional adhesive anchors, install adhesive anchorages in accordance with the manufacturer's instructions including hole size, drilling equipment and method, hole cleaning equipment and method, mixing and dispensing adhesive, and anchor insertion. Do not alter the manufacturer's mixing nozzle or dispenser. Provide anchorage rods that are clean and free of grease, oil, or any other foreign material. Demonstrate hole cleaning method to the Engineer for approval and continue the approved process for all anchorage locations. Test adhesive anchors in accordance with Item 450.3.3, "Tests." Test 3 anchors per 100 anchors installed.

GENERAL NOTES:


Designed according to AASHTO LRFD Bridge Design Specifications.
The safety end treatments shown herein are intended for use in those installations where out of control vehicles are likely to traverse the openings approximately perpendicular to the pipe runners.
Pipe runners are designed for a traversing load of 1,800 pounds at yield as recommended by Research Report 280-1, "Safety Treatment of Roadside Cross-Drainage Structures", Texas Transportation Institute, March 1981.
When structure is founded on solid rock, depth of toewalls for culverts and wingwalls may be reduced or eliminated as directed by the Engineer.
All bolts, nuts, washers, brackets, angles, and pipe runners are considered parts of the safety end treatment for payment.
The quantities for pipe runners, reinforcing steel, and concrete, resulting from the formulas given herein are for Contractor's information only.
See the Box Culvert Supplement (BCS) standard sheet for additional dimensions and information.

Cover dimensions are clear dimensions, unless noted otherwise. Reinforcing dimensions are out-to-out of bars.

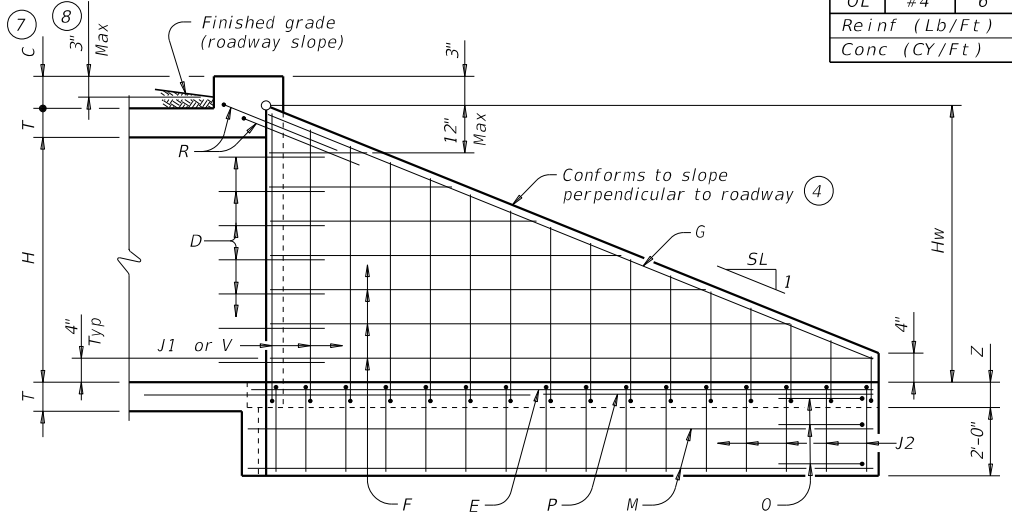


INSIDE ELEVATION OF WINGWALL

(Showing reinforcing. Culvert and culvert toewall reinforcing not shown for clarity.)

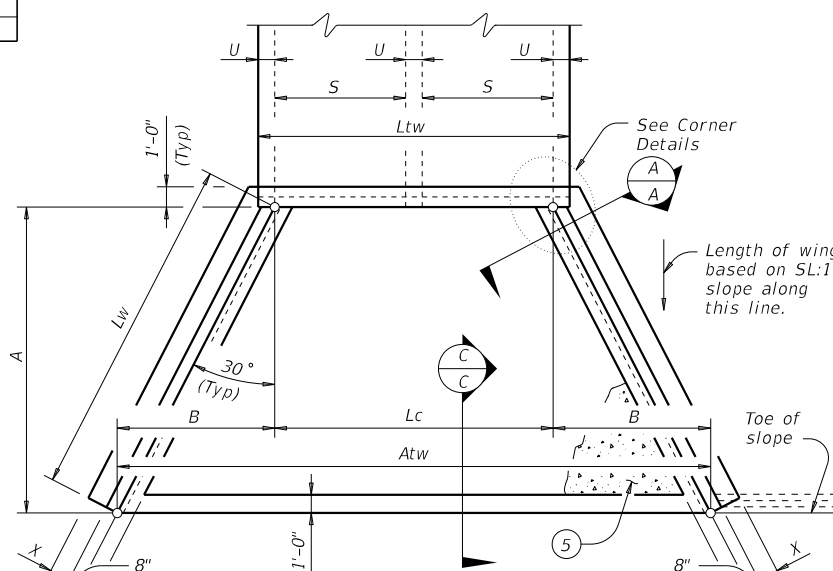


STRUCTURAL PLAN


(Showing dimensions.)

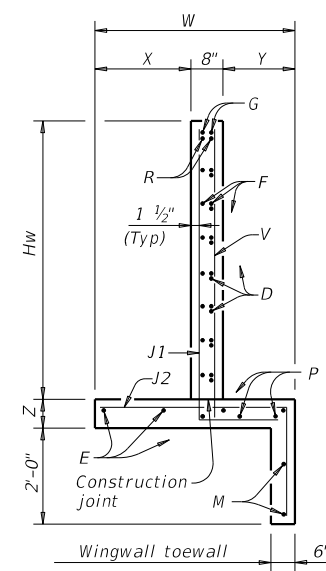

SECTION A-A

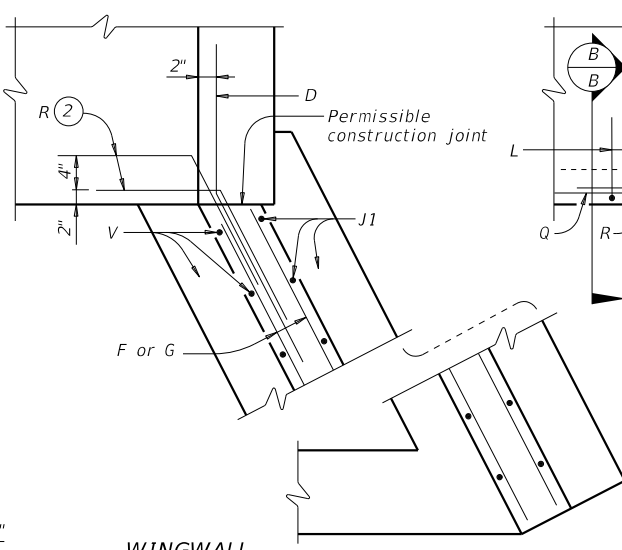


WINGWALL

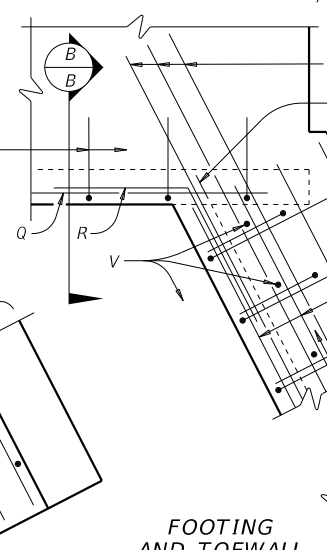


CORNER DETAILS

FOOTING AND TOEWALL

(Culvert and culvert toewall reinforcing not shown for clarity.)

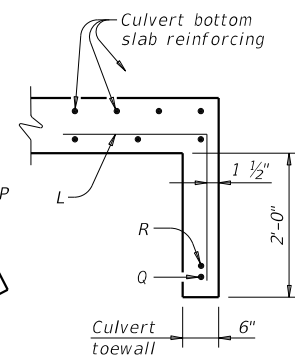

SECTION B-B (5)

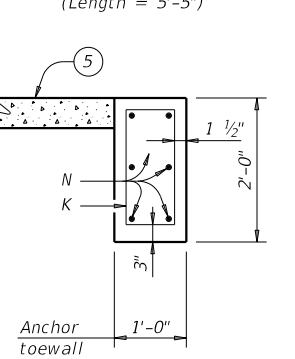

SECTION C-C

BARS K (Length = 5'-5")

BARS OL

		Bridge Division Standard	
SAFETY END TREATMENT WITH FLARED WINGS FOR 0° SKEW BOX CULVERTS TYPE I ~ CROSS DRAINAGE			
SETB-FW-0			
FILE: setbf0se-20.dgn	DN: GAF	CK: CAT	DW: TxDOT
REVISIONS	CONTRACT	SECTION	JOB
0105	02	023, ETC.	SH 70/86
DIST	COUNTY	SHEET NO.	
CHS	HALL	64	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 8/2/2023 9:40:27 AM
 FILE: T:\CHSD\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Culverts\SETB-FW-0.dwg

MAXIMUM PIPE RUNNER LENGTHS AND REQUIRED PIPE RUNNER SIZES

Maximum Pipe Runner Length (Pc or Pw)	Required Pipe Runner Size			Required Anchor Pipe Size		
	Pipe Size	Pipe O.D.	Pipe I.D.	Pipe Size	Pipe O.D.	Pipe I.D.
9'-4"	3" STD	3.500"	3.068"	2" STD	2.375"	2.067"
19'-0"	4" STD	4.500"	4.026"	3" STD	3.500"	3.068"
33'-6"	5" STD	5.563"	5.047"	4" STD	4.500"	4.026"

- 10 If pipe runner length (Pw) is 1'-9" or less replace the normal pipe runner and anchor pipe with a single non-sliding pipe runner. See Non-Sliding Pipe Runner Details for additional information.
- 11 At Contractor's option, 7/8" diameter hole may be formed or cored drilled. Percussion drilling is not permitted. Adjust placement of reinforcing steel as necessary to avoid bolt holes.
- 12 After installation of pipe runner, use the 1/2" inspection hole to ensure that the lap of the anchor pipe with the pipe runner is adequate.
- 13 At Contractor's option, an adhesive anchor may be used. Provide 3/4" Dia adhesive anchors that meet the requirements of ASTM A307 Gr A fully threaded rods. Embed threaded rods into curb, wingwalls, and toewall using a Type III, Class C, D, E, or F anchor adhesive. Minimum embedment depth is 5 1/2". Provide anchor adhesive able to achieve a basic bond strength in tension, Nba, of 20 kips. Submit signed and sealed calculations or the manufacturer's published literature showing the proposed anchor adhesive's ability to develop this load to the Engineer for approval prior to use.

PIPE RUNNER DIMENSION CALCULATIONS:


$$Wn = (2.000)(Dn) - (0.416')$$

$$Pwn = (Dn)(K2) - (2.063')$$

$$Pw1 \text{ Non-Sliding Pipe Runner (If required)} = (D1)(K2) - (0.563')$$


$$Pc = (A)(K1) - (1.688')$$

Wn = Distance from working point to centerline anchor bolt measured along bottom inside face of wing (feet)
 Dn = Distance from working point to centerline pipe runner measured along outside face of anchor toewall (feet)
 Pw = Wingwall pipe runner length (feet)
 Pc = Curb pipe runner length (feet)
 K = Constant values for use in formulas
 Slope SL:1 K1 K2
 3:1 ~ 1.054 ~ 1.826
 4:1 ~ 1.031 ~ 1.785
 6:1 ~ 1.014 ~ 1.756
 n = Wing pipe runner number

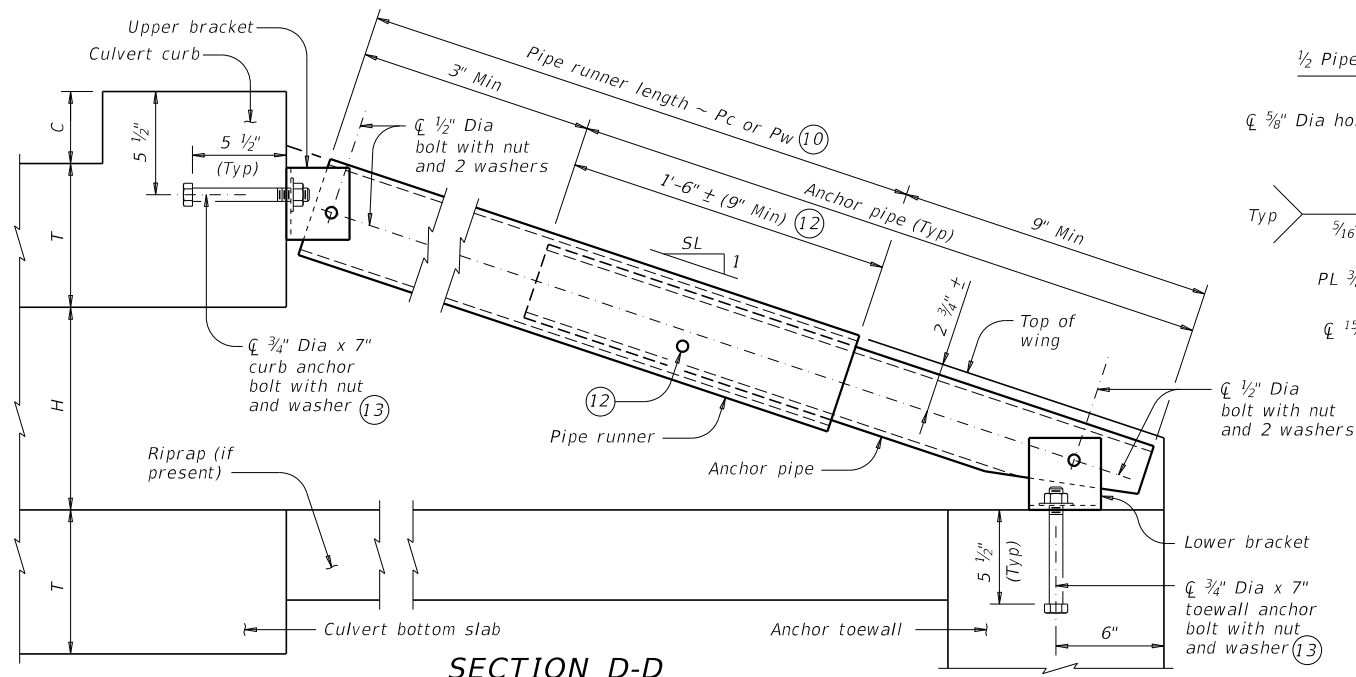

SECTION D-D


(Showing curb pipe runner. Except for upper bracket, wingwall pipe runners are similar.)

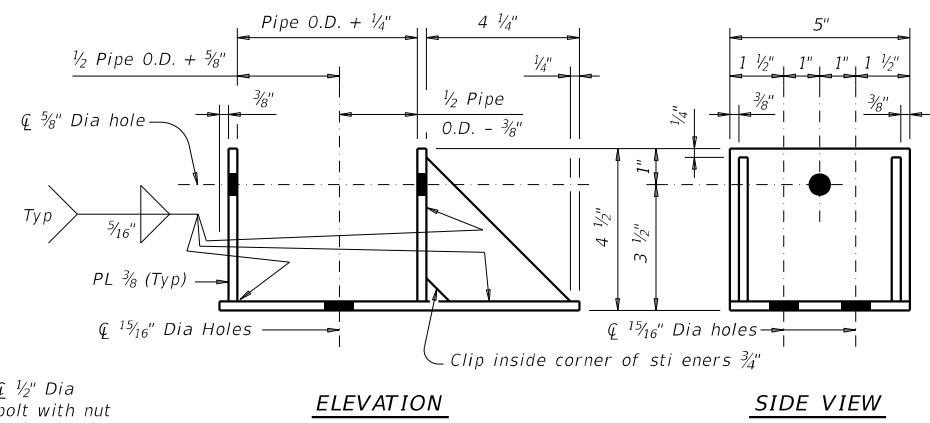

ELEVATION

SIDE VIEW

Install 3/4" anchor bolt in hole nearest to the culvert curb. Other bolt hole is intended for use on the opposite hand wingwall.

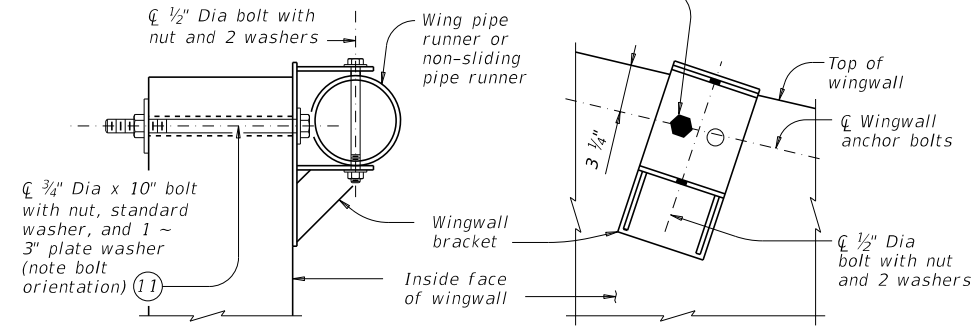

SECTION E-E


ELEVATION

(Showing installed bracket.)

(Showing installed bracket normal to wall. Pipe not shown for clarity.)

Note: Match wingwall bracket to the upper curb bracket size.

WINGWALL BRACKET DETAILS

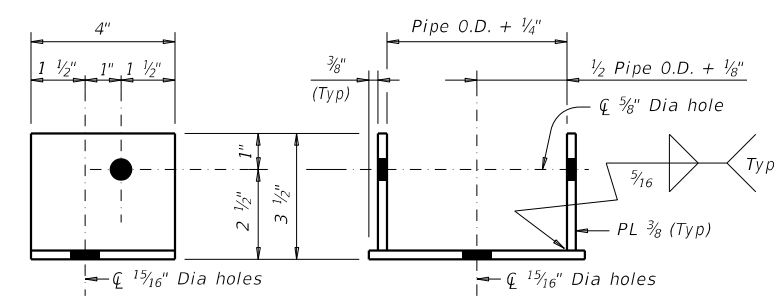


SIDE VIEW


ELEVATION

Note: Match upper and lower brackets, except for the brackets used with non-sliding pipe runners, to the required pipe diameters as shown in the table.

UPPER AND LOWER BRACKET DETAILS

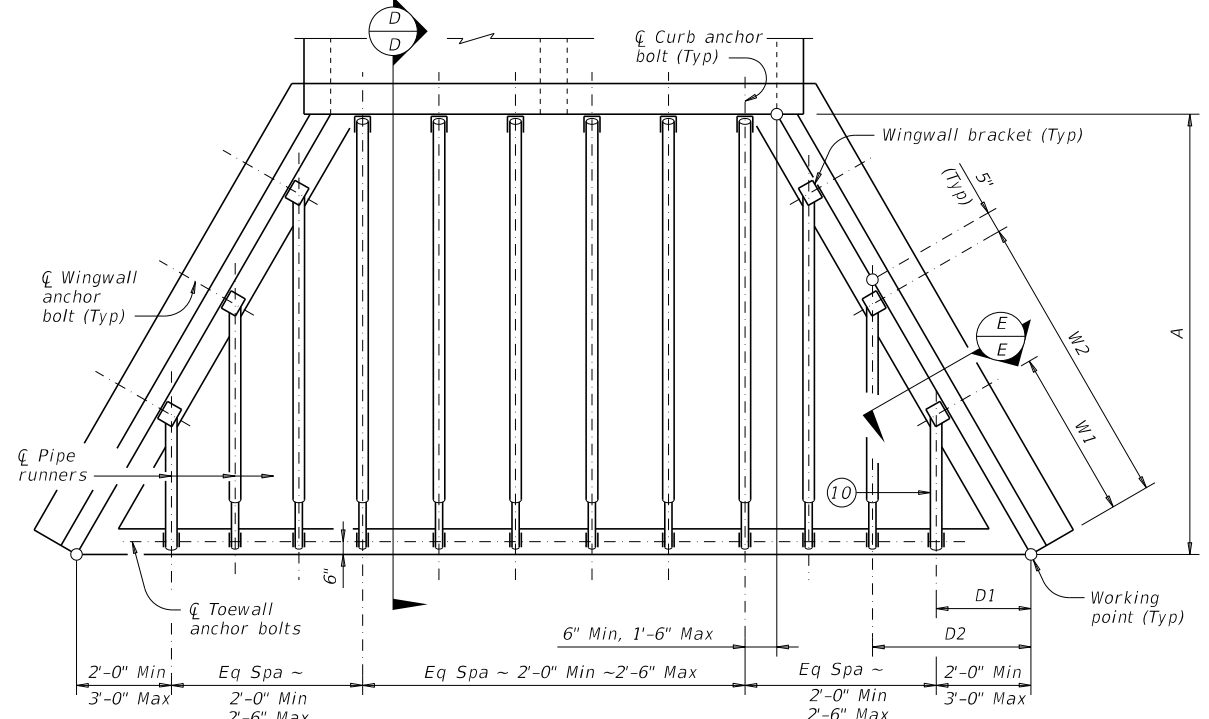


PIPE RUNNER PLAN

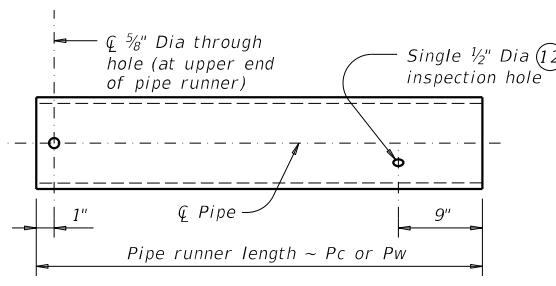


PIPE RUNNER DETAILS

Note: Pipe diameter required for curb pipe runner is also used for wingwall pipe runner.

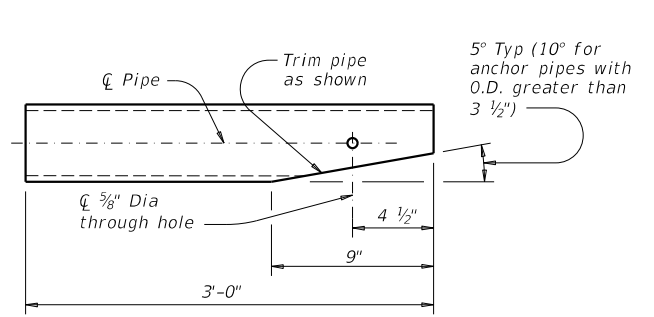

ANCHOR PIPE DETAILS

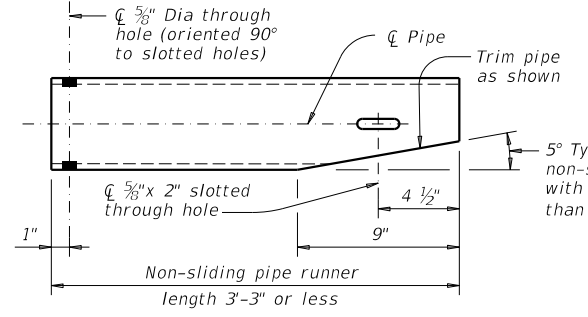

NON-SLIDING PIPE RUNNER DETAILS

Note: Pipe size is the same as required for curb pipe runner. Adjust the corresponding lower bracket accordingly.

Texas Department of Transportation
Bridge Division Standard

SAFETY END TREATMENT WITH FLARED WINGS FOR 0° SKEW BOX CULVERTS TYPE I ~ CROSS DRAINAGE

SETB-FW-0

FILE: setbf0se-20.dgn	DN: GAF	CK: CAT	DW: TxDOT	CK: TxDOT
REVISIONS	CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH 70/86	
DIST	COUNTY	SHEET NO.		
CHS	HALL	65		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

- No Action Required Required Action

Action No.

1. Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
2. Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
3. Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
4. When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP* _____

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

-
-
-
-

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input checked="" type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input checked="" type="checkbox"/> Erosion Control Logs	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input checked="" type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required Required Action

Action No.

-
-
-
-

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required Required Action

Action No.

1. Minimize impacts to existing vegetation in the project area; impacted vegetation should be replaced with in-kind native vegetation. Trim trees instead of removal (when possible). Re-vegetation proposed for the project would be in compliance with Executive Order 13112 on Invasive Species and the Executive Memorandum on Beneficial Landscapes.
-
-

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

- No Action Required Required Action

Action No.

1. MIGRATORY BIRDS-DO NOT DISTURB, DESTROY, OR REMOVE ACTIVE NESTS INCLUDING NESTING BIRDS DURING THE NESTING SEASON. AVOID IMPACTS TO BIRDS, THEIR EGGS, AND THEIR YOUNG. AVOID THE REMOVAL OF UNOCCUPIED, INACTIVE NESTS, AS PRACTICAL BE.
2. PLAINS SPOTTED SKUNK - AVOID HARMING SPECIES IF ENCOUNTERED AND AVOID UNNECESSARY IMPACTS TO DENS.
3. TEXAS HORNED LIZARD - POTENTIAL OCCURRENCE IN THE PROJECT AREA. IF THE TEXAS HORNED LIZARD IS FOUND IN THE PROJECT AREA; AVOID HARMING THE SPECIES AND ALLOW SPECIES TO SAFELY LEAVE THE PROJECT AREA. THIS SHOULD INCLUDE AVOIDING HARVESTER ANT MOUNDS IN THE SELECTION OF PROJECT SPECIFIC LOCATIONS (PSL'S). AVOID OR MINIMIZE DISTURBING OR REMOVING DOWNED TREES, ROTTING STUMPS, AND LEAF LITTER WHERE FEASIBLE.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SWSP: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labeling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- Dead or distressed vegetation (not identified as normal)
- Trash piles, drums, canister, barrels, etc.
- Undesirable smells or odors
- Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required Required Action

Action No.

-
-
-


VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

- No Action Required Required Action

Action No.

-
-
-



Charles B. Steed, P.E.

08/03/2023

		Design Division Standard	
ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS			
EPIC			
FILE: epic.dgn	DN: TxDOT	CK: RG	DW: VP
© TxDOT: February 2015	CONT: 0105	SECT: 02	JOB: 023, ETC.
12-12-2011 (DS) REVISIONS			SH 70/86
05-07-14 ADDED NOTE SECTION IV.	DIST: CHS	COUNTY: HALL	SHEET NO: 67
01-23-2015 SECTION I CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.			

STORMWATER POLLUTION PREVENTION PLAN (SWP3):

This SWP3 has been developed in accordance with the TPDES Construction General Permit TXR150000 (CGP). The Texas Department of Transportation (TxDOT) ensures that project specifications include adequate best management practices (BMPs) for this project.

For all projects with soil disturbing activity and for projects that have Environmental, Permits, Issues, and Commitments (EPICs) dependent on stormwater controls and water quality measures TxDOT will maintain a SWP3 with all pertinent records, correspondence, environmental documents, etc. at the project field office, Area Office, or electronically.

This SWP3 is consistent with requirements specified in applicable stormwater plans and the projects environmental permits, issues, and commitments (EPICs). A copy of the CGP is included in Attachment 2.12 of the SWP3 binder.

1.0 SITE/PROJECT DESCRIPTION

1.1 PROJECT CONTROL SECTION JOB (CSJ):
0105-02-023, ETC.

1.2 PROJECT LIMITS:

From: TURKEY NCL, NORTH

To: FM 657

1.3 PROJECT COORDINATES:

BEGIN: (Lat) 34.3985446, (Long) -100.8899578

END: (Lat) 34.4757012, (Long) -100.7785528

1.4 TOTAL PROJECT AREA (Acres): 95.91

1.5 TOTAL AREA TO BE DISTURBED (Acres): 21.02

1.6 NATURE OF CONSTRUCTION ACTIVITY:

ACP OVERLAY AND BRIDGE REPLACEMENT (CULVERT)

1.7 MAJOR SOIL TYPES:

Soil Type	Description
SAGERTON LOAM, 1 TO 3% SLOPES	STA 315+62.40 TO 773+40.00, WELL DRAINED, MEDIUM RUNOFF
WEYMOUTH LOAM, 1 TO 5% SLOPES	STA 336+21.60 TO 773+40.00, WELL DRAINED, HIGH RUNOFF
WOODWARD-QUINLAN COMPLEX, 5 TO 12% SLOPES	STA 336+21.60 TO 773+40.00, WELL DRAINED, MEDIUM RUNOFF

1.8 PROJECT SPECIFIC LOCATIONS (PSLs):

PSLs must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. PSLs may be identified during preconstruction meetings or during the construction process. Please choose from the options below:

- PSLs determined during preconstruction meeting
- PSLs determined during construction
- No PSLs planned for construction

Type	Sheet #s

All off-ROW PSLs required by the Contractor are the Contractor's responsibility. The Contractor shall secure all permits required by local, state, federal laws for off-ROW PSLs. The contractor shall provide diagrams, areas of disturbance, acreage, and BMPs for all off-ROW PSLs within one mile of the project.

1.9 CONSTRUCTION ACTIVITIES:

(Use the following list as a starting point when developing the Construction Activity Schedule and Ceasing Record in Attachment 2.5.)

- Mobilization
- Install sediment and erosion controls
 - Blade existing topsoil into windrows, prep ROW, clear and grub
 - Remove existing pavement
- Grading operations, excavation, and embankment
 - Excavate and prepare subgrade for proposed pavement widening
- Remove existing culverts, safety end treatments (SETs)
 - Remove existing metal beam guard fence (MBGF), bridge rail
- Install proposed pavement per plans
- Install culverts, culvert extensions, SETs
 - Install mow strip, MBGF, bridge rail
 - Place flex base
 - Rework slopes, grade ditches
 - Blade windrowed material back across slopes
 - Revegetation of unpaved areas
- Achieve site stabilization and remove sediment and erosion control measures
- Other: BACKFILL PAVEMENT EDGES

Other: _____

Other: _____

1.10 POTENTIAL POLLUTANTS AND SOURCES:

- Sediment laden stormwater from stormwater conveyance over disturbed area
- Fuels, oils, and lubricants from construction vehicles, equipment, and storage
- Solvents, paints, adhesives, etc. from various construction activities
- Transported soils from offsite vehicle tracking
- Construction debris and waste from various construction activities
 - Contaminated water from excavation or dewatering pump-out water
- Sanitary waste from onsite restroom facilities
- Trash from various construction activities/receptacles
 - Long-term stockpiles of material and waste
- Discharges from concrete washout activities, runoff from concrete cutting activities, and other concrete related activities.

Other: _____

Other: _____

Other: _____

1.11 RECEIVING WATERS:

Receiving waters must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. Include Segment # for receiving waters.

Tributaries	Classified Waterbody
HACKBERRY CREEK, COTTONWOOD CREEK, BUFFALO CREEK, WIND RIVER	NORTH PEASE RIVER (0220)

* Add (*) for impaired waterbodies with pollutant in ().

1.12 ROLES AND RESPONSIBILITIES: TxDOT

- Development of plans and specifications
- Submit Notice of Intent (NOI) to TCEQ (≥5 acres)
- Post Construction Site Notice
 - Submit NOI/CSN to local MS4
- Perform SWP3 inspections
- Maintain SWP3 records and update to reflect daily operations
- Complete and submit Notice of Termination to TCEQ
- Maintain SWP3 records for 3 years

Other: _____

Other: _____

Other: _____

1.13 ROLES AND RESPONSIBILITIES: CONTRACTOR

- Day To Day Operational Control
- Submit Notice of Intent (NOI) to TCEQ (≥5 acres)
- Post Construction Site Notice
 - Submit NOI/CSN to local MS4
- Maintain schedule of major construction activities
- Install, maintain and modify BMPs
- Complete and submit Notice of Termination to TCEQ
- Maintain SWP3 records for 3 years

Other: _____

Other: _____

Other: _____

1.14 LOCAL MUNICIPAL SEPARATE STORM SEWER SYSTEM (MS4) OPERATOR COORDINATION:

MS4 Entity
NO MS4 RECEIVES STORMWATER DISCHARGE FROM THIS SITE.



Charles B. Steed, P.E.

08/23/2023

STORMWATER POLLUTION PREVENTION PLAN (SWP3)



Sheet 1 of 2

Texas Department of Transportation

FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
				68
STATE	STATE DIST.	COUNTY		
TEXAS	CHS	HALL		
CONT.	SECT.	JOB	HIGHWAY NO.	
0105	02	023, ETC	SH 86/ SH 70	

STORMWATER POLLUTION PREVENTION PLAN (SWP3):

2.0 BEST MANAGEMENT PRACTICES (BMPs) AND CONTROLS, INSPECTION, AND MAINTENANCE

The Contractor shall be the responsible party for implementing the BMPs described herein and for complying with the SWP3 for control of erosion and sedimentation during day-to-day operations. The Contractor shall implement changes to this SWP3 approved by TxDOT within the times specified in this SWP3 or the CGP.

2.1 EROSION CONTROL AND SOIL STABILIZATION BMPs:

T / P

- Protection of Existing Vegetation
- Vegetated Buffer Zones
- Soil Retention Blankets
- Geotextiles
- Mulching/ Hydromulching
- Soil Surface Treatments
- Temporary Seeding
- Permanent Planting, Sodding or Seeding
- Biodegradable Erosion Control Logs
- Rock Filter Dams/ Rock Check Dams
- Vertical Tracking
- Interceptor Swale
- Riprap
- Diversion Dike
- Temporary Pipe Slope Drain
- Embankment for Erosion Control
- Paved Flumes
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.2 SEDIMENT CONTROL BMPs:

T / P

- Biodegradable Erosion Control Logs
- Dewatering Controls
- Inlet Protection
- Rock Filter Dams/ Rock Check Dams
- Sandbag Berms
- Sediment Control Fence
- Stabilized Construction Exit
- Floating Turbidity Barrier
- Vegetated Buffer Zones
- Vegetated Filter Strips
- Other: _____
- Other: _____
- Other: _____
- Other: _____

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

Sediment control BMPs requiring design capacity calculations (See SWP3 Attachment 1.3.):

T / P

- Sediment Trap
 - Calculated volume runoff from 2-year, 24-hour storm for each acre of disturbed area
 - 3,600 cubic feet of storage per acre drained
- Sedimentation Basin
 - Not required (<10 acres disturbed)
 - Required (>10 acres) and implemented.
 - Calculated volume runoff from 2-year, 24-hour storm for each acre of disturbed area
 - 3,600 cubic feet of storage per acre drained
- Required (>10 acres), but not feasible due to:
 - Available area/Site geometry
 - Site slope/Drainage patterns
 - Site soils/Geotechnical factors
 - Public safety
 - Other: _____

2.3 PERMANENT CONTROLS:

(Coordinate post-construction BMPs with appropriate TxDOT maintenance sections.)

BMPs To Be Left In Place Post Construction:

Type	Stationing	
	From	To
NO PERMANENT CONTROLS ARE PLANNED.		

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.4 OFFSITE VEHICLE TRACKING CONTROLS:

- Excess dirt/mud on road removed daily
- Haul roads dampened for dust control
- Loaded haul trucks to be covered with tarpaulin
- Stabilized construction exit
- Daily street sweeping
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.5 POLLUTION PREVENTION MEASURES:

- Chemical Management
- Concrete and Materials Waste Management
- Debris and Trash Management
- Dust Control
- Sanitary Facilities
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.6 VEGETATED BUFFER ZONES:

Natural vegetated buffers shall be maintained as feasible to protect adjacent surface waters. If vegetated natural buffer zones are not feasible due to site geometry, the appropriate additional sediment control measures have been incorporated into this SWP3.

Type	Stationing	
	From	To
VEGETATED BUFFER ZONES ARE NOT PLANNED.		

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.7 ALLOWABLE NON-STORMWATER DISCHARGES:

- Fire hydrant flushings
- Irrigation drainage
- Pavement washwater (where spills or leaks have not occurred, and detergents are not used)
- Potable water sources
- Springs
- Uncontaminated groundwater
- Water used to wash vehicles or control dust
- Other allowable non-stormwater discharges as allowed by TPDES GP TXR150000.

2.8 DEWATERING:

Dewatering discharges of accumulated stormwater, groundwater, and surface water including discharges from dewatering of trenches, excavations, foundations, vaults, and other points of accumulation are prohibited unless managed by appropriate controls to prevent and minimize the offsite discharge of sediment and other pollutants.

2.9 INSPECTIONS:

All disturbed areas and erosion and sediment control devices shall be inspected at least once every seven (7) days. Inspections shall be performed by TxDOT as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.5 of this SWP3.

When dewatering activities are present, a daily inspection will be conducted once per day during those activities and documented in accordance with CGP and TxDOT requirements.

2.10 MAINTENANCE:

Control measures shall be properly installed according to specifications. If it is determined that a BMP or control measure is not operating effectively, maintenance must be accomplished as soon as possible and before the next anticipated rain event, but in no case later than 7 calendar days after being able to access the site. Maintenance shall be performed by the Contractor as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.5 of this SWP3.



Charles B. Steed, P.E.

08/23/2023

STORMWATER POLLUTION PREVENTION PLAN (SWP3)




Sheet 2 of 2

Texas Department of Transportation


FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
				68A
STATE	STATE DIST.	COUNTY		
TEXAS	CHS	HALL		
CONT.	SECT.	JOB	HIGHWAY NO.	
0105	02	023, ETC	SH 86/ SH 70	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/2/2023
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Env\ec916.dgn

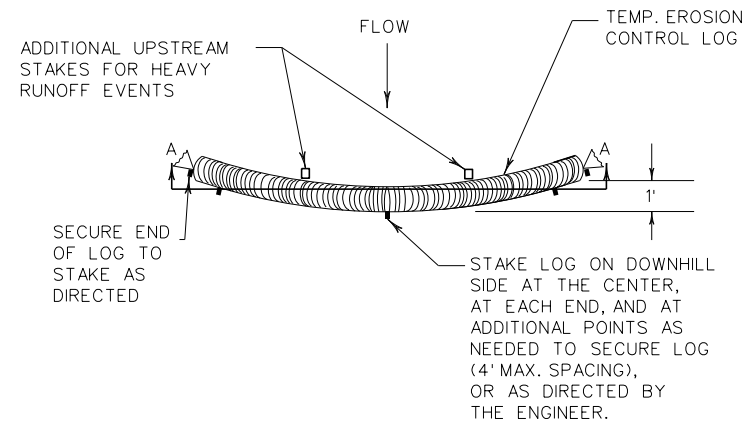


PLAN VIEW

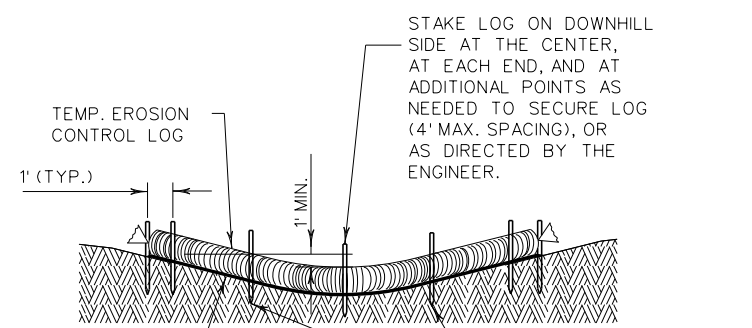


SECTION A-A
 EROSION CONTROL LOG DAM

LEGEND

- CL-D EROSION CONTROL LOG DAM
- CL-BOC EROSION CONTROL LOG AT BACK OF CURB
- CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
- CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
- CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
- CL-DI EROSION CONTROL LOG AT DROP INLET
- CL-CI EROSION CONTROL LOG AT CURB INLET
- CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET

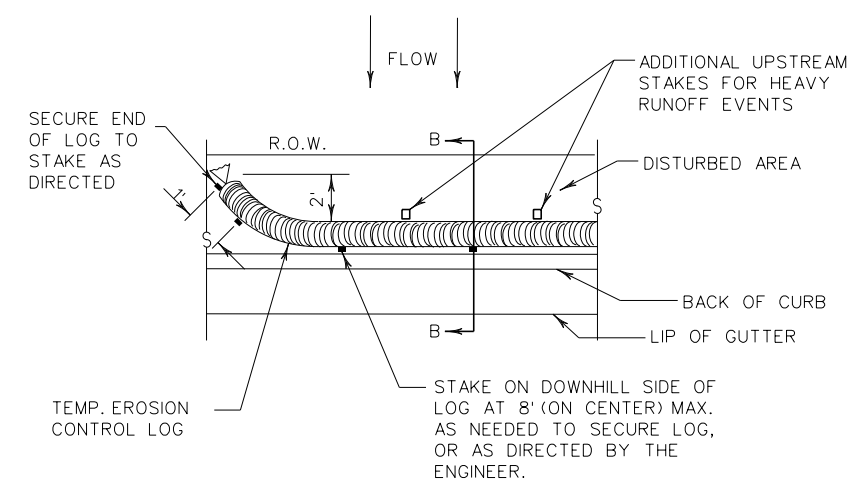


PLAN VIEW

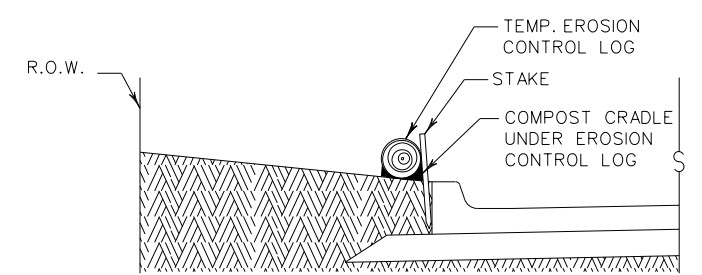


SECTION B-B
 EROSION CONTROL LOG AT BACK OF CURB


CL-BOC



REBAR STAKE DETAIL

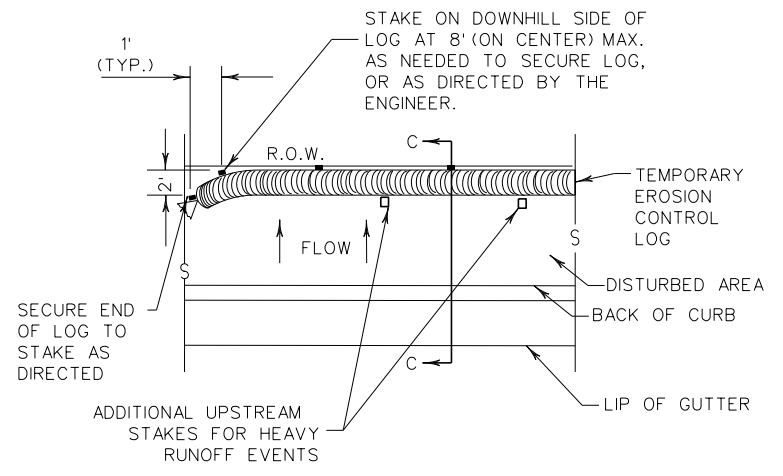


PLAN VIEW

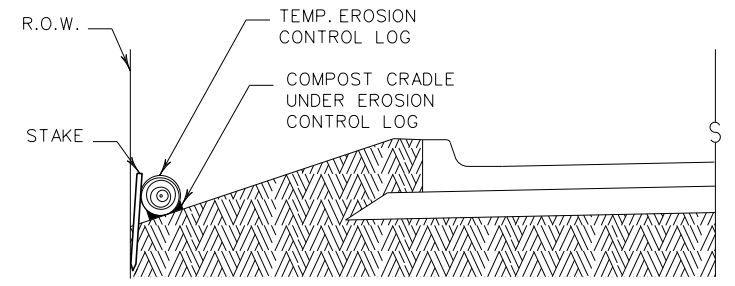

SECTION C-C

EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

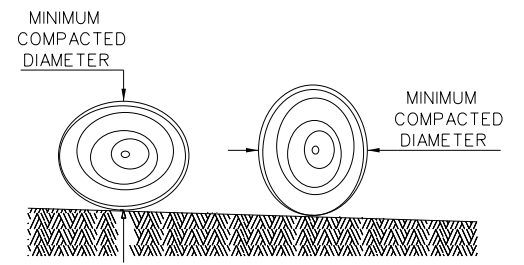

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion controllog sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Controllogs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

GENERAL NOTES:


1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES			
EROSION CONTROL LOG			
EC(9)-16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT: 0105	SECT: 02	JOB: 023, ETC.
REVISIONS		HIGHWAY: SH 70/86	
DIST: CHS	COUNTY: HALL	SHEET NO.: 69	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/2/2023 9:47:54 AM
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Env\ec916.dgn

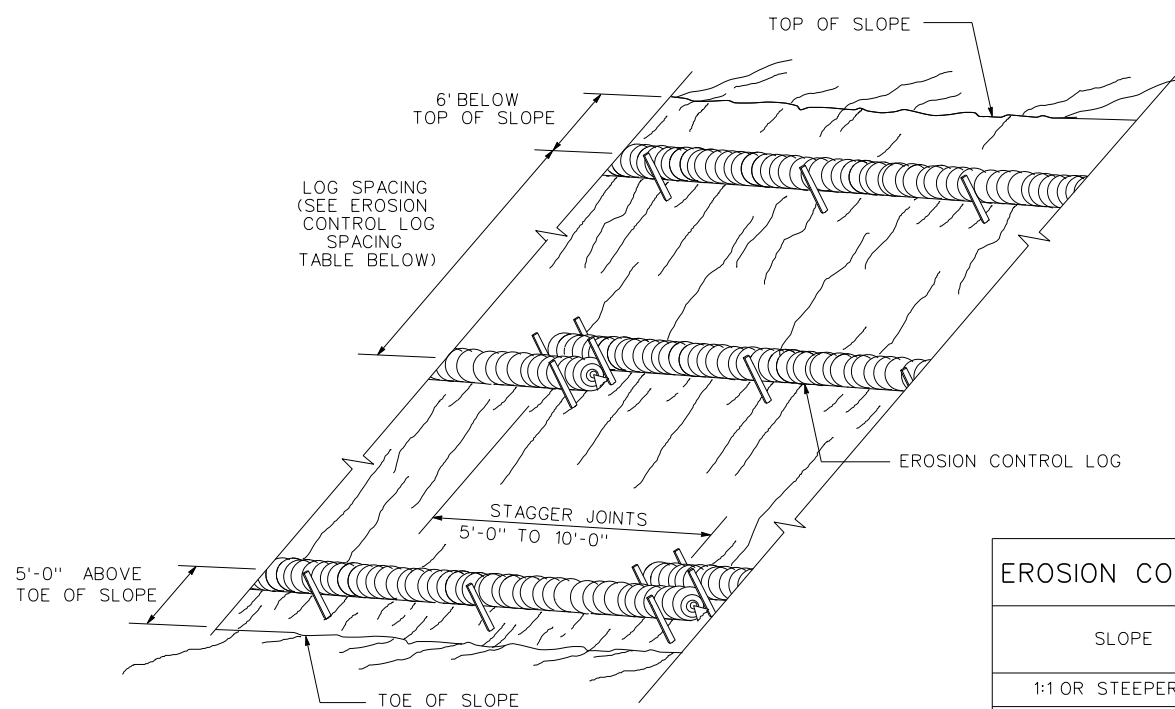

EROSION CONTROL LOGS ON SLOPES
 STAKE AND TRENCHING ANCHORING


CL-SST

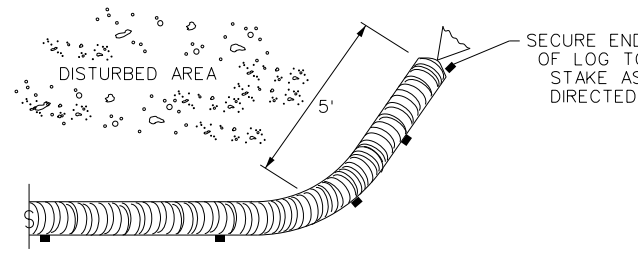

END SECTION RAP DETAIL


SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
 SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
 HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

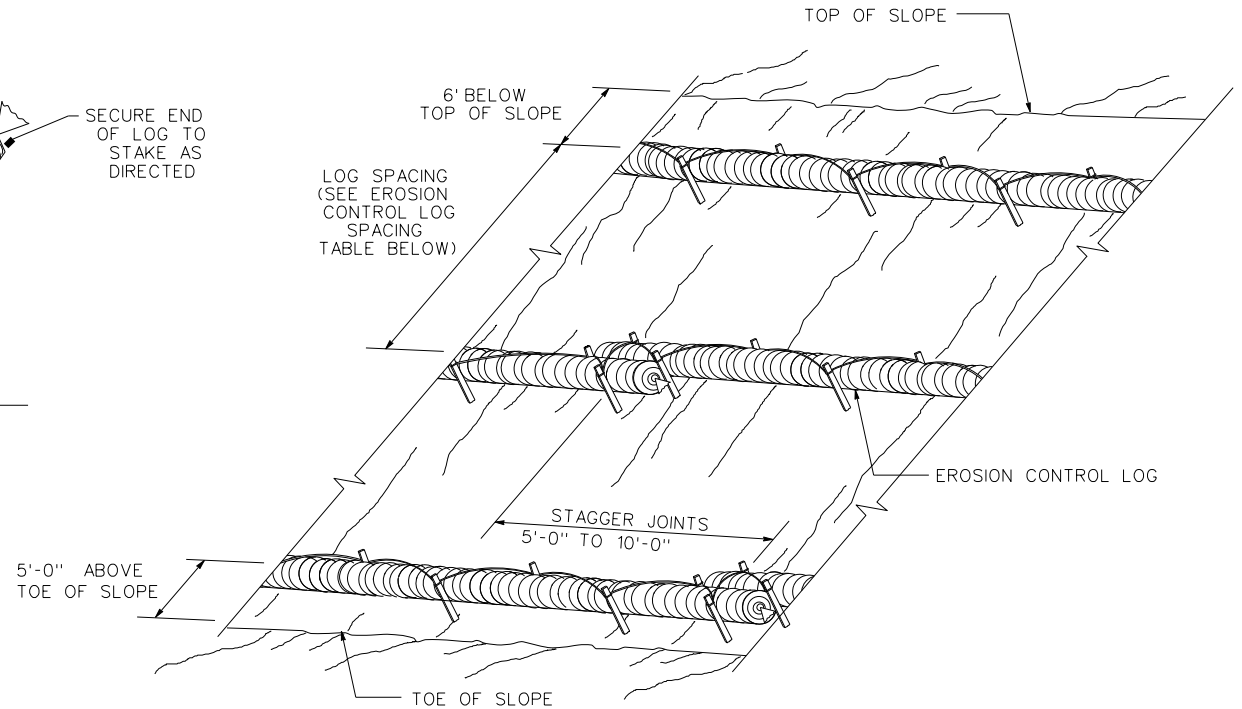



EROSION CONTROL LOGS ON SLOPES
 STAKE AND LASHING ANCHORING

CL-SSL

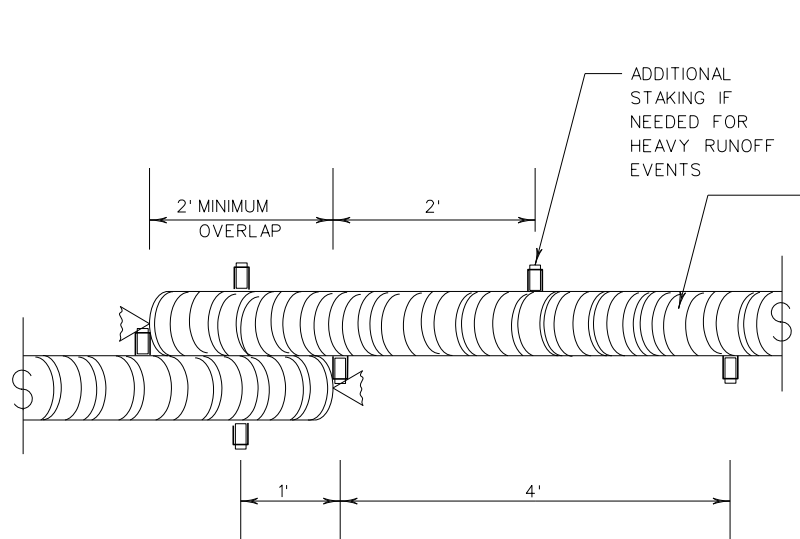


STAKE AND TRENCHING ANCHORING DETAIL

CL-SST

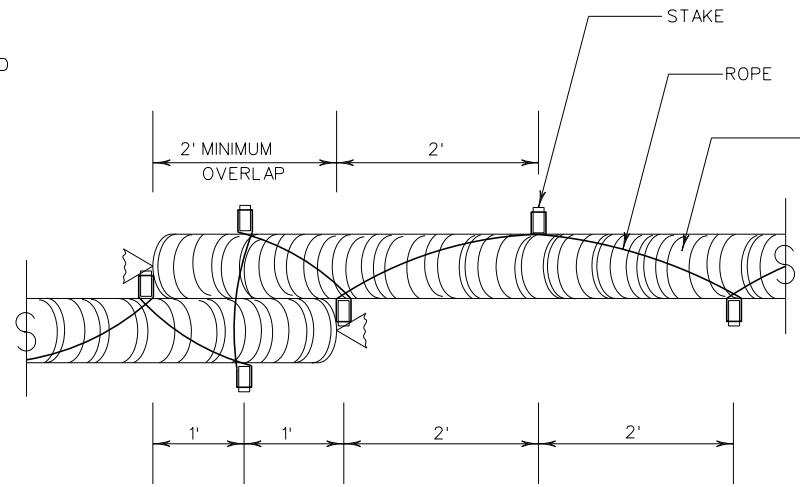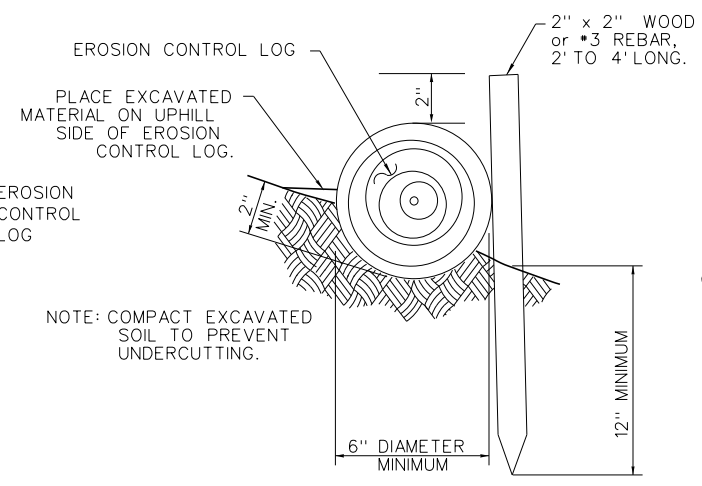


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

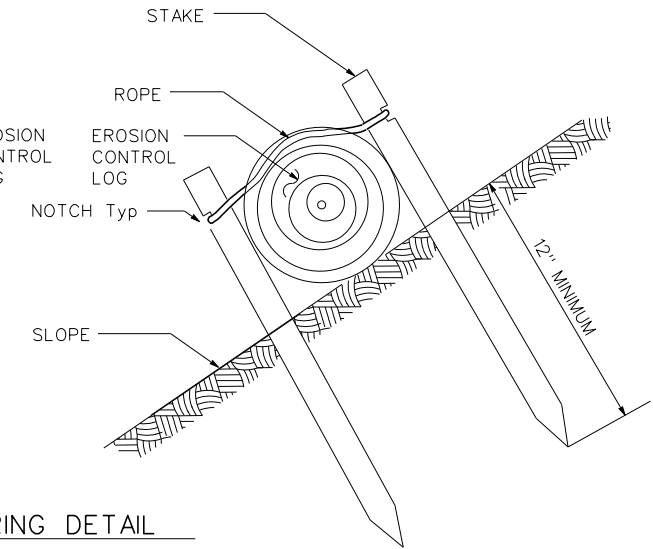

TRENCH DEPTH TABLE	
LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"




STAKE NOTCH DETAIL

SHEET 2 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0105	02	023, ETC.
	DIST	COUNTY	SH 70/86
	CHS	HALL	SHEET NO. 70


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 8/2/2023 9:48:35 AM
 FILE: T:\CHSDES\PROJECTS\HALL\0105-02-023 (SH 86 Rehab)\Plan Sheets\STANDARDS\Env\ec916.dgn

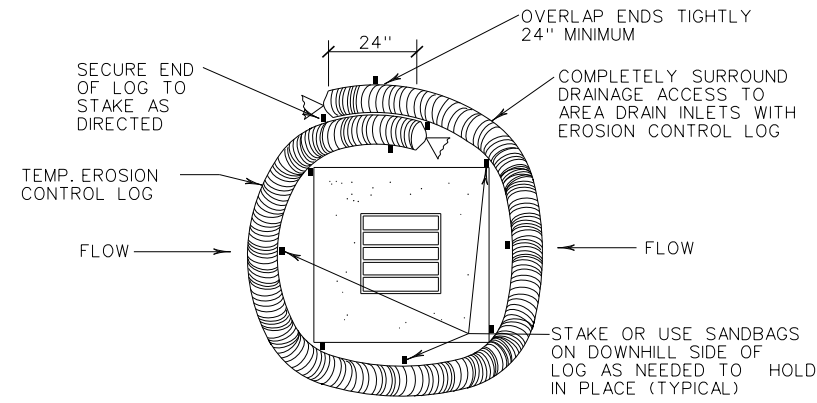


EROSION CONTROL LOG AT DROP INLET

CL-DI

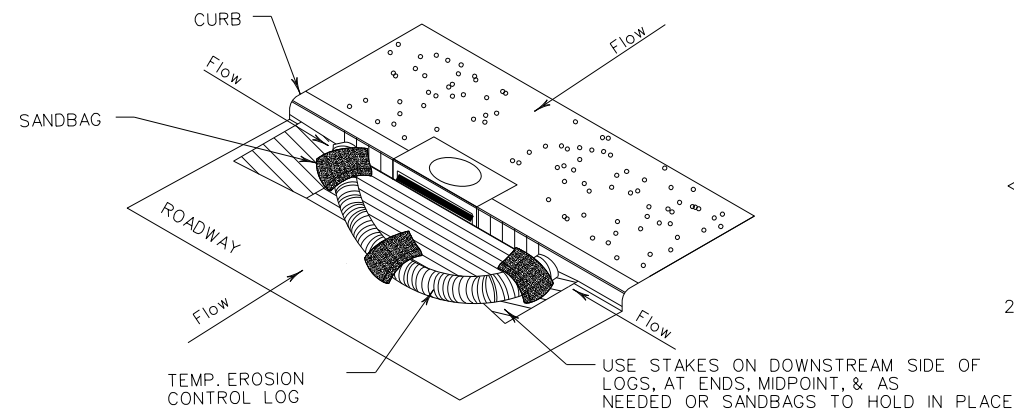

EROSION CONTROL LOG AT CURB INLET


CL-CI

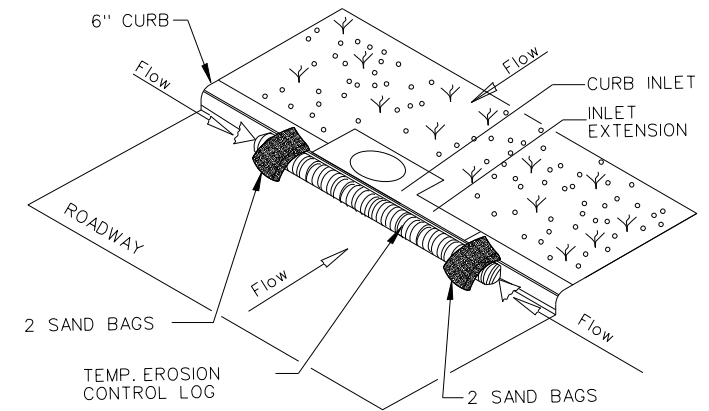

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

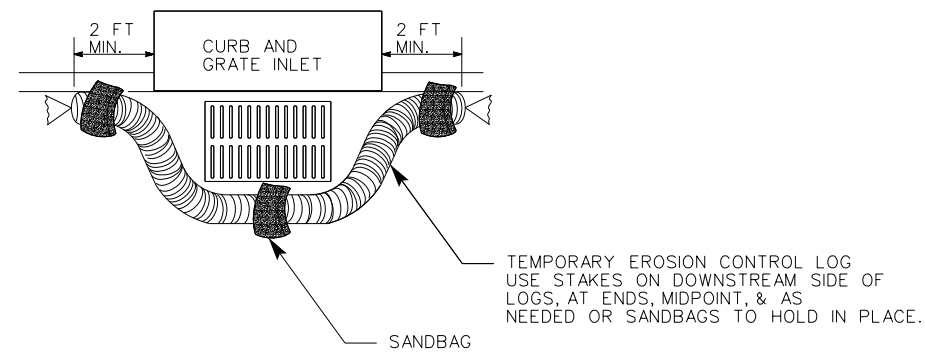

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

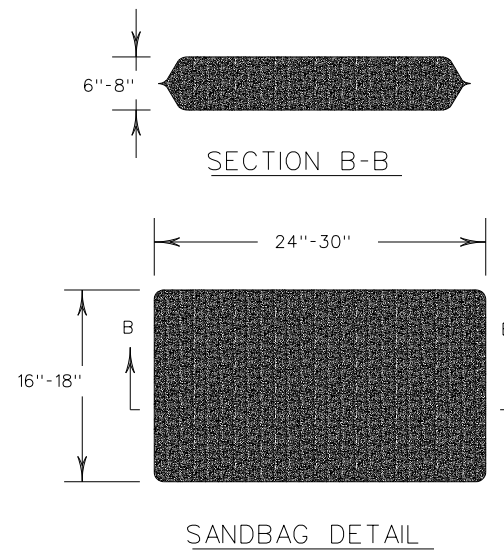


SHEET 3 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS		0105	02 023, ETC.
DIST	COUNTY	SH	70/86
CHS	HALL		71

CK: DW: CK: DW:


BEGIN PROJECT STA. 315+62.40

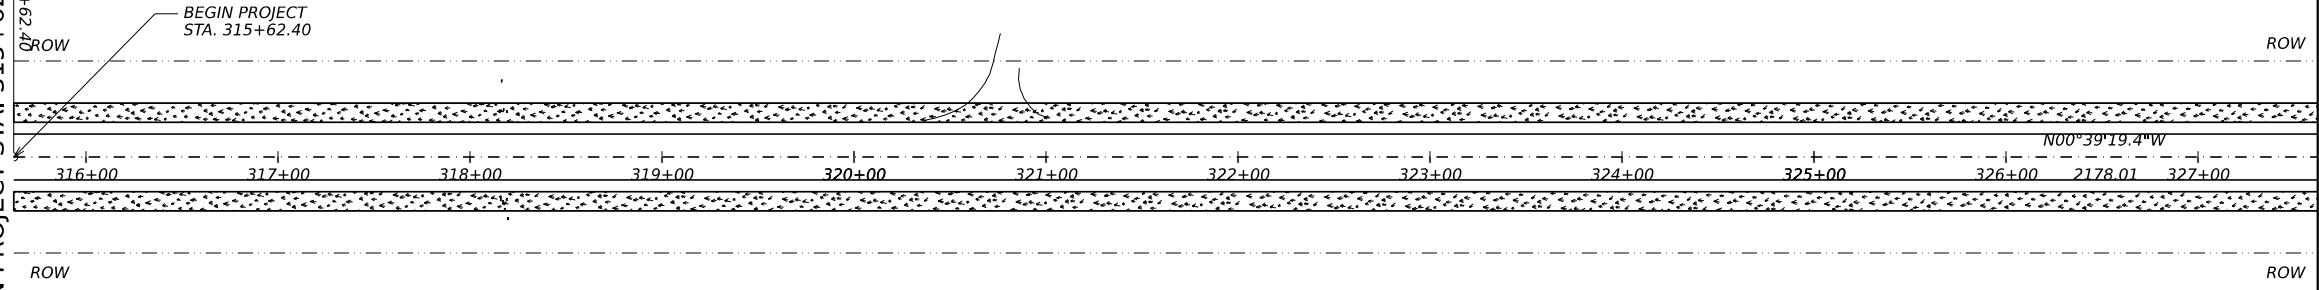

MATCHLINE STA. 327+62.40


SEEDING AND EMULSION

MATCHLINE STA. 327+62.40

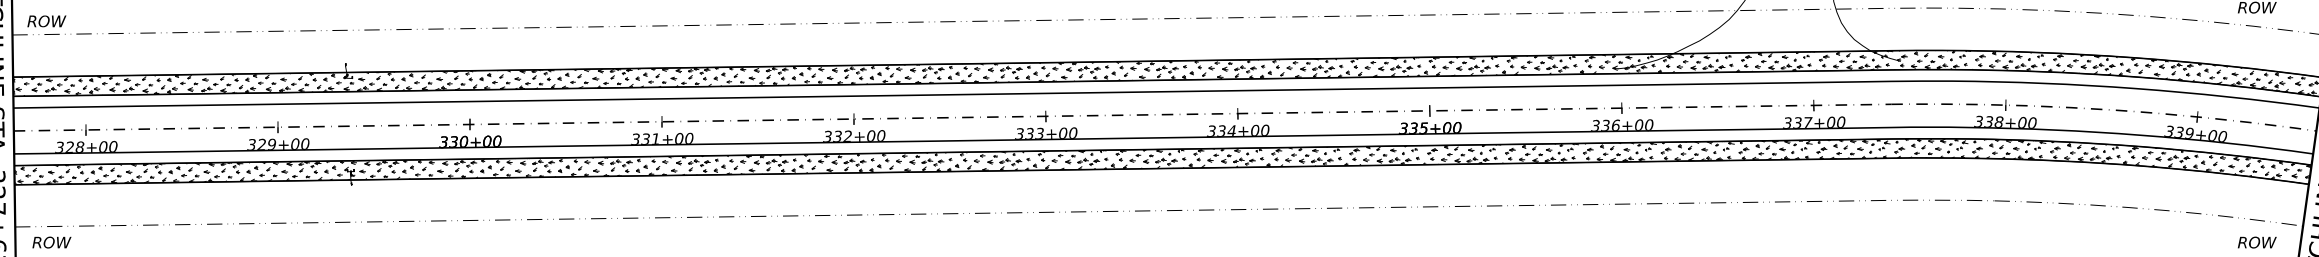

MATCHLINE STA. 339+62.40

MATCHLINE STA. 339+62.40

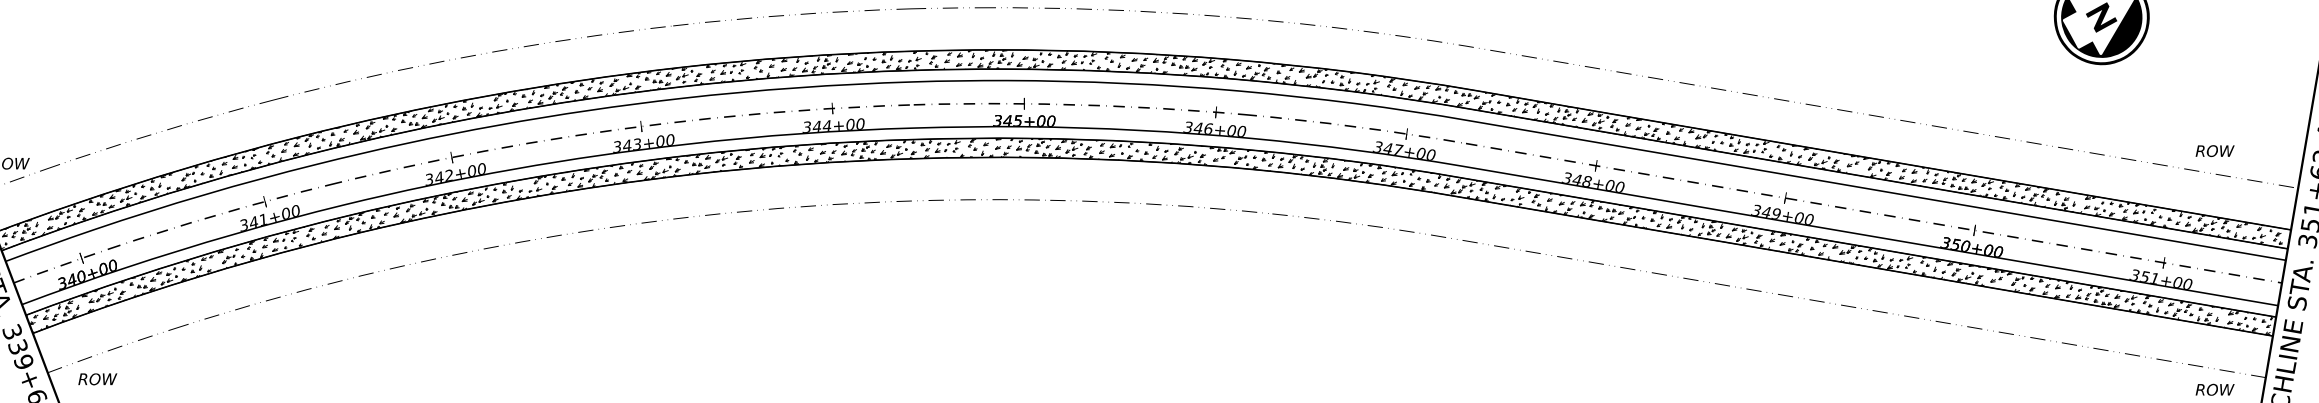

MATCHLINE STA. 351+62.40



Charles B. Steed, P.E.

08/08/2023



SWP3 LAYOUT

SHEET 1 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST		COUNTY	SHEET NO.
CHS		HALL	72


DATE: FILE:

DATE: _____
FILE: _____

DATE: _____
FILE: _____


DN: _____
CK: _____
DW: _____
CC: _____

MATCHLINE STA. 351+62.40

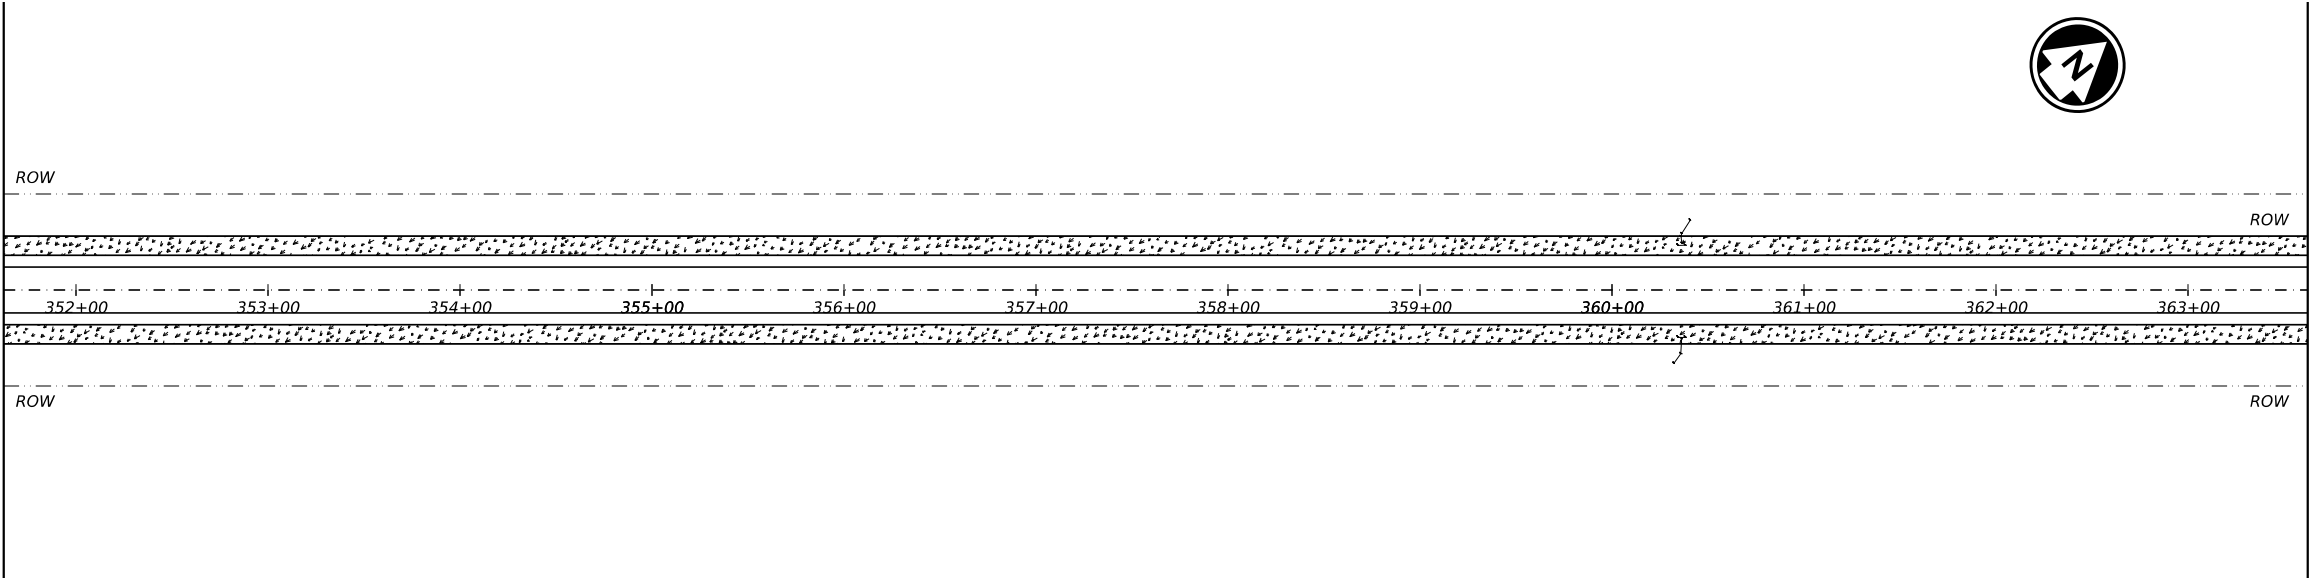


MATCHLINE STA. 363+62.40

MATCHLINE STA. 363+62.40

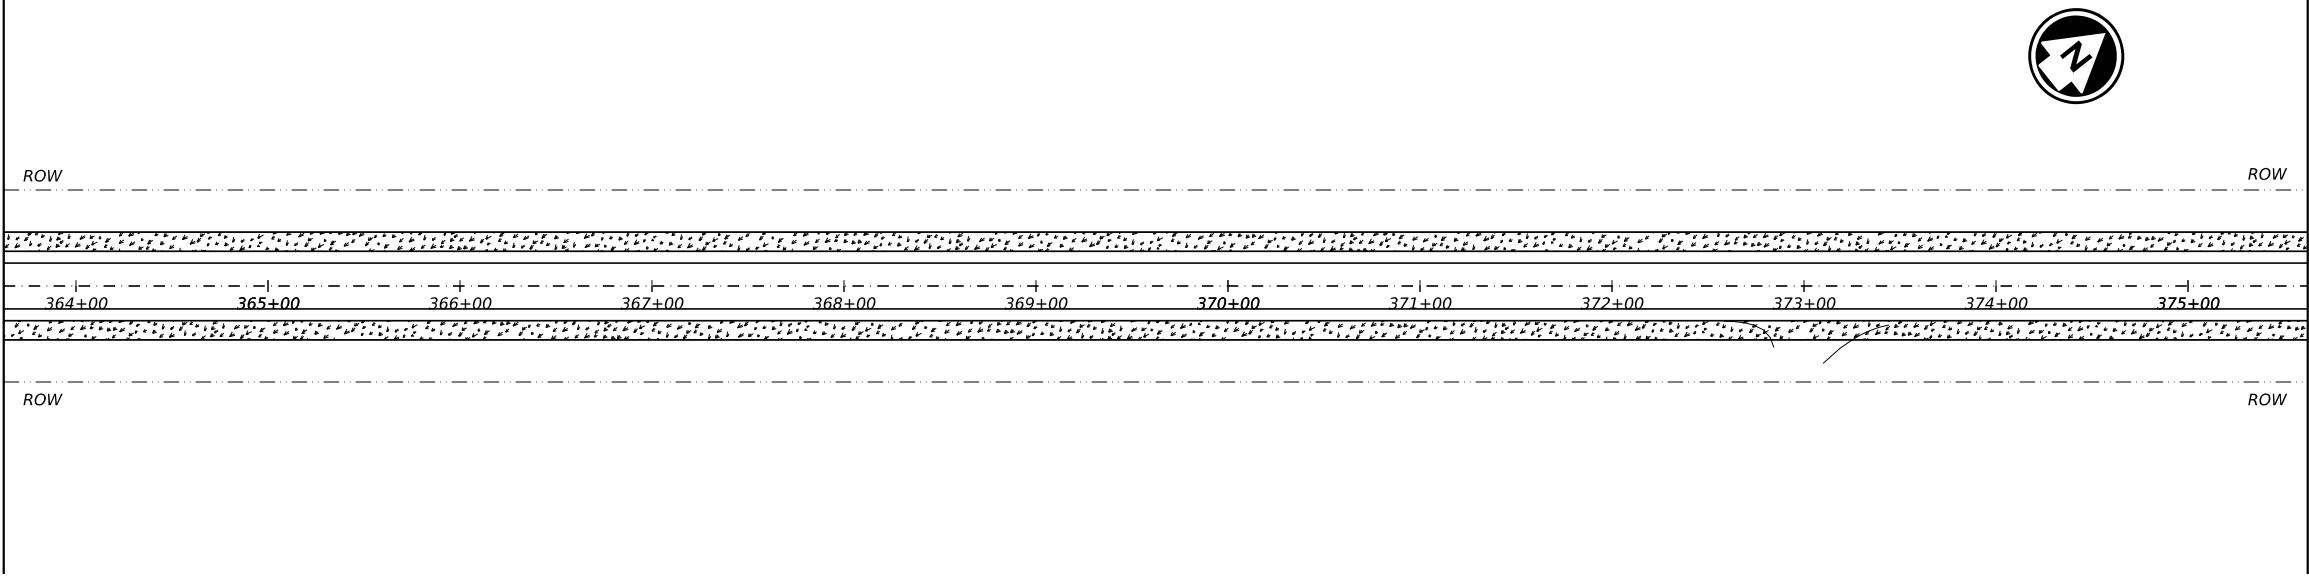

MATCHLINE STA. 375+62.40

MATCHLINE STA. 375+62.40

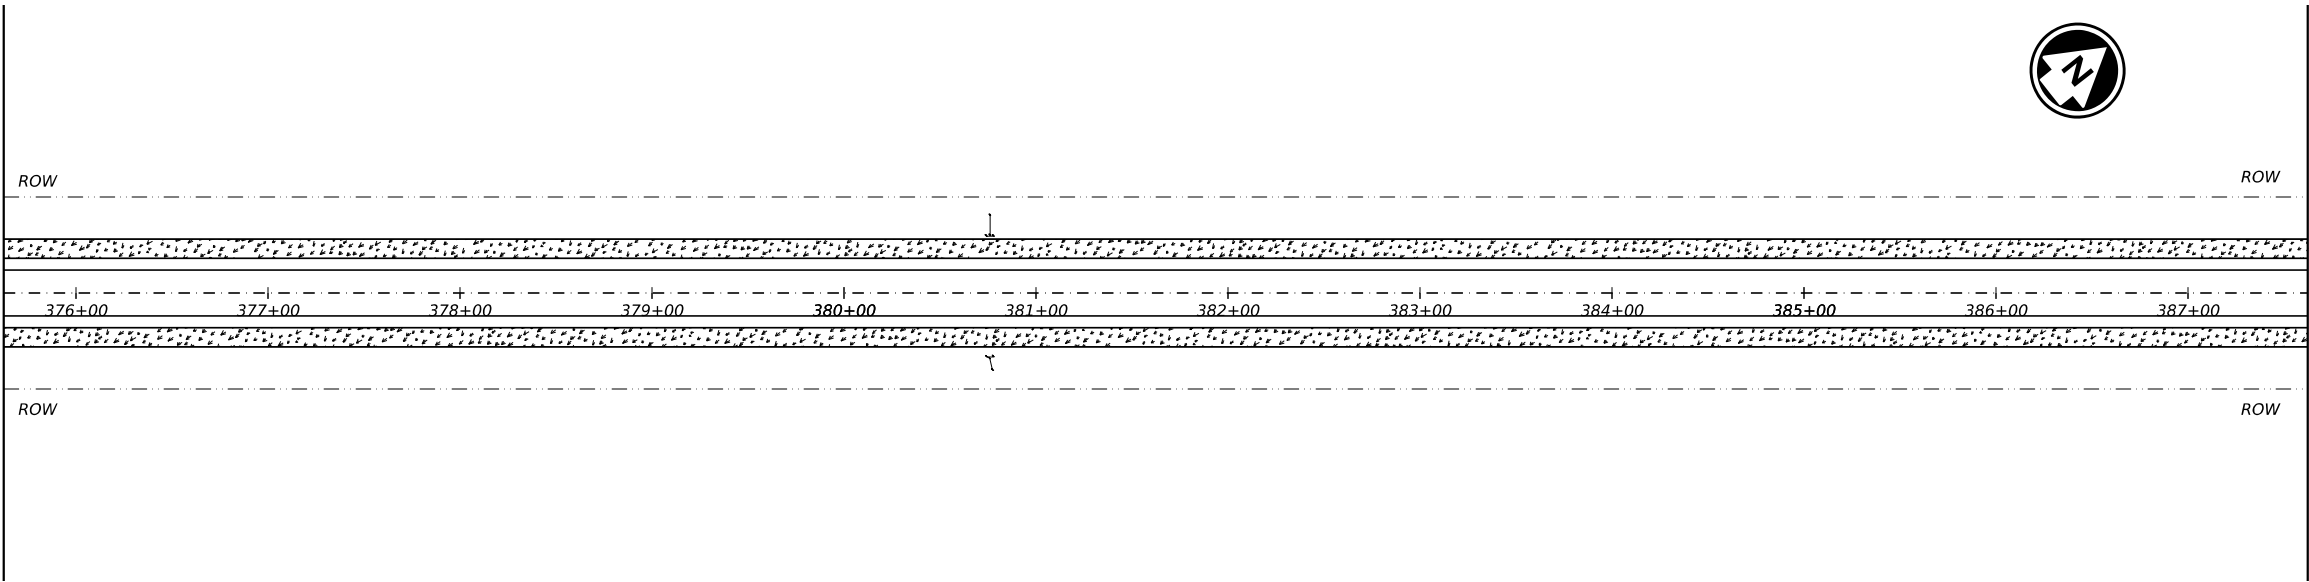

MATCHLINE STA. 387+62.40

 SEEDING AND EMULSION



Charles B. Steed, P.E.

08/08/2023



SWP3 LAYOUT


SHEET 2 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	73	

DATE: _____
FILE: _____


DN: _____
CK: _____
DW: _____

MATCHLINE STA. 387+62.40

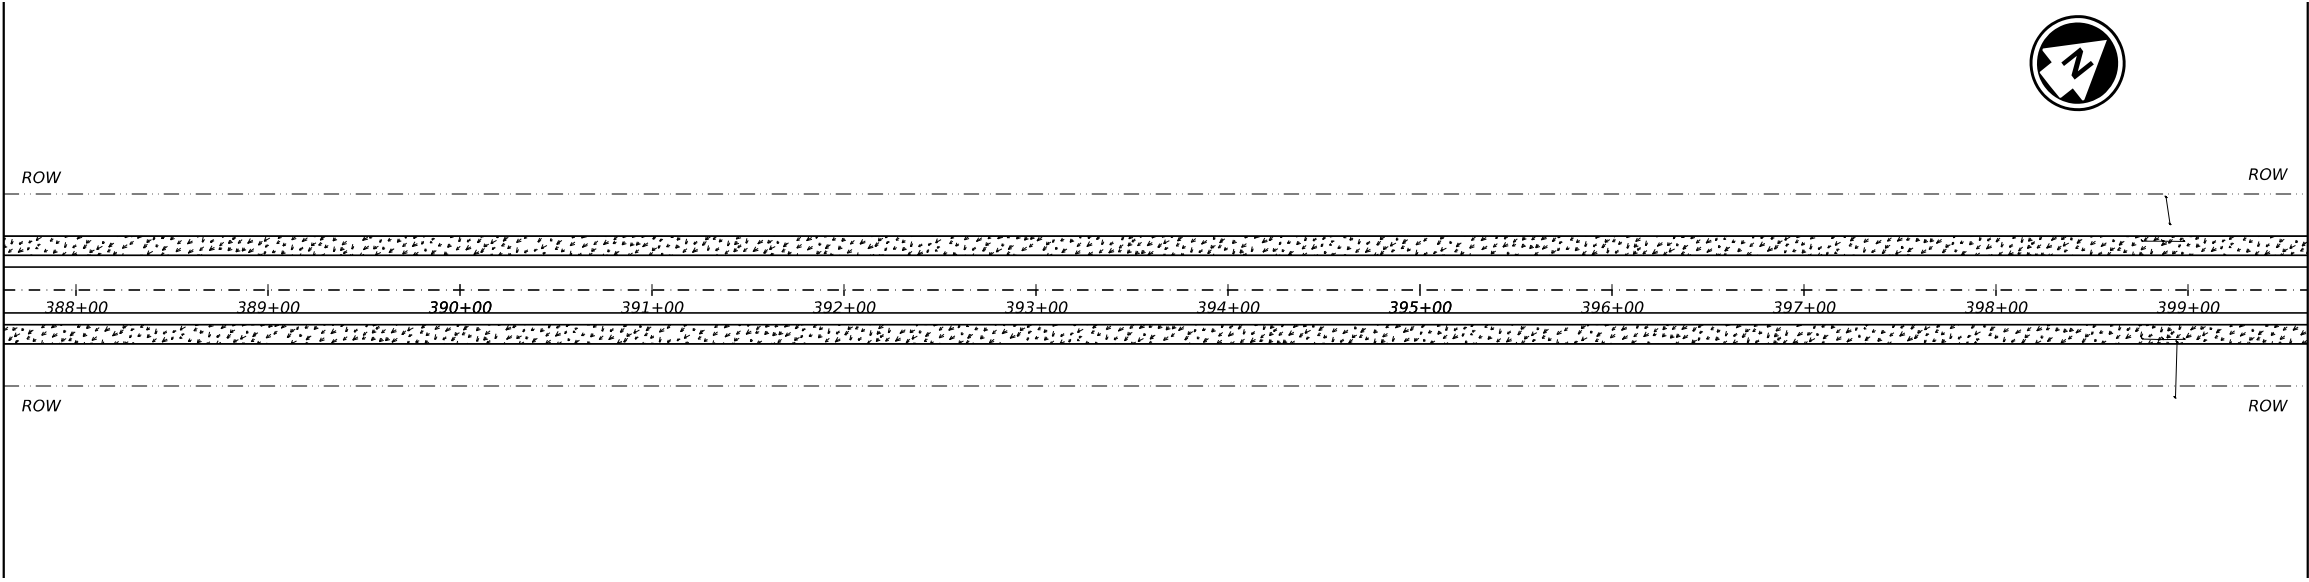


MATCHLINE STA. 399+62.40

MATCHLINE STA. 399+62.40

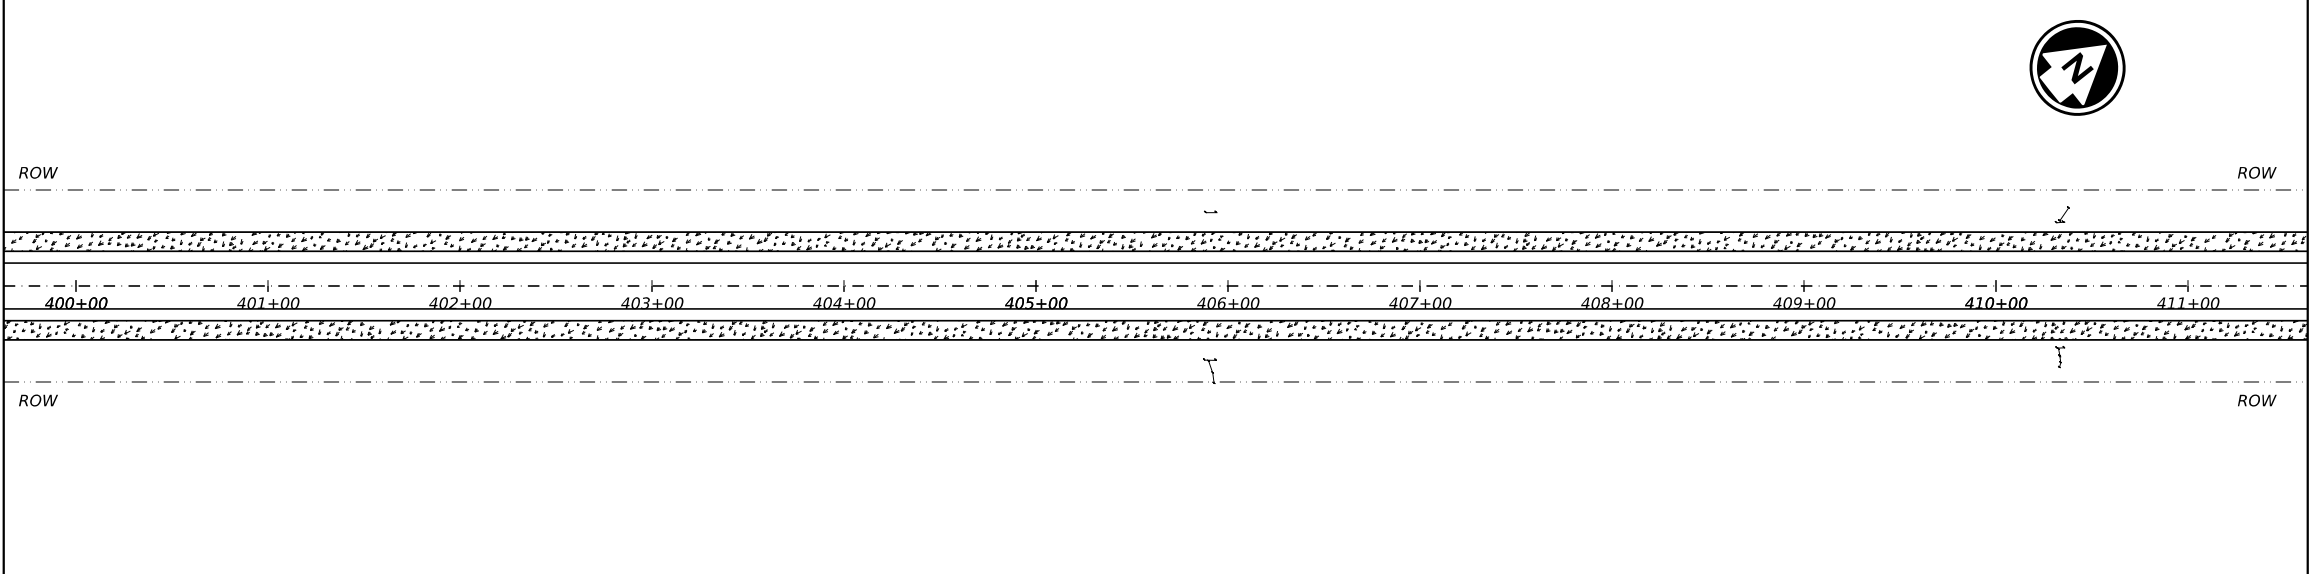

MATCHLINE STA. 411+62.40

MATCHLINE STA. 411+62.40

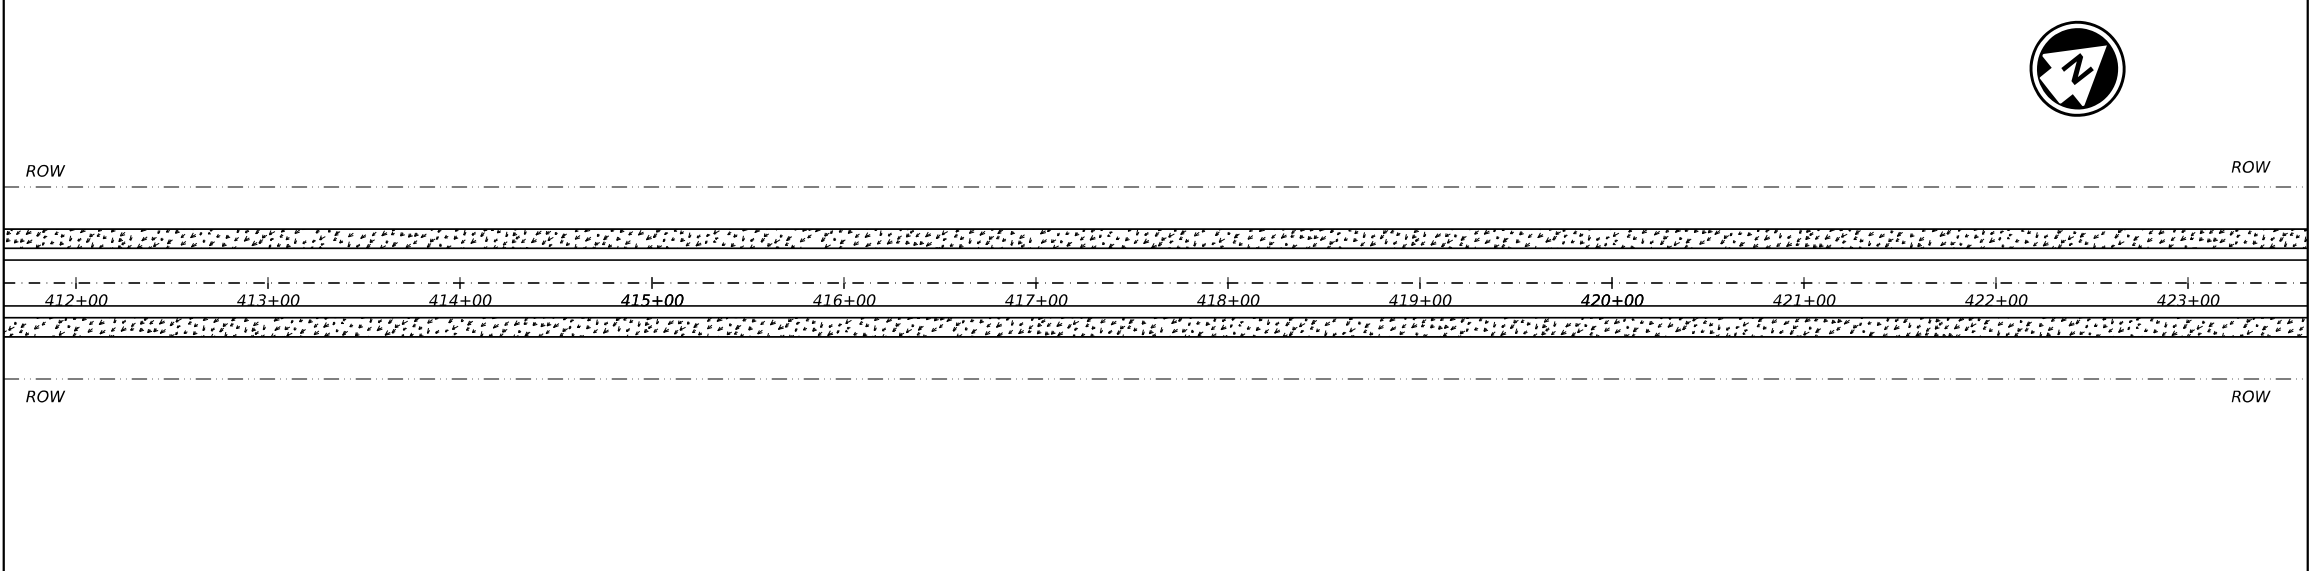

MATCHLINE STA. 423+62.40

 SEEDING AND EMULSION

STATE OF TEXAS
CHARLES B. STEED
88647
LICENSED
PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
08/08/2023




 Texas Department of Transportation

SWP3 LAYOUT


SHEET 3 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	74	

DW: _____
 CK: _____
 DW: _____
 CK: _____

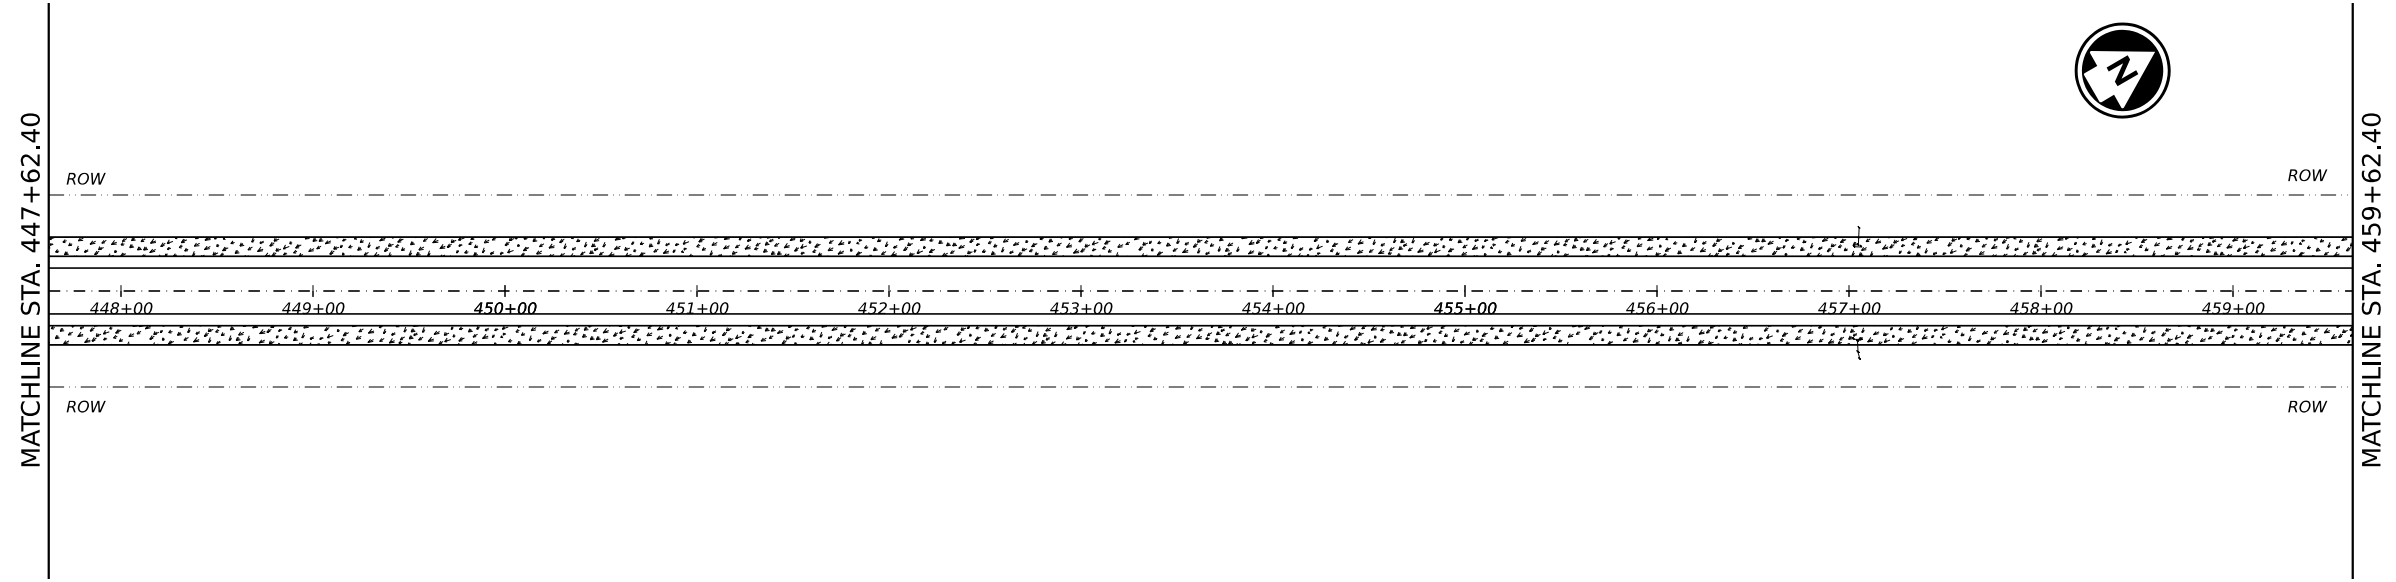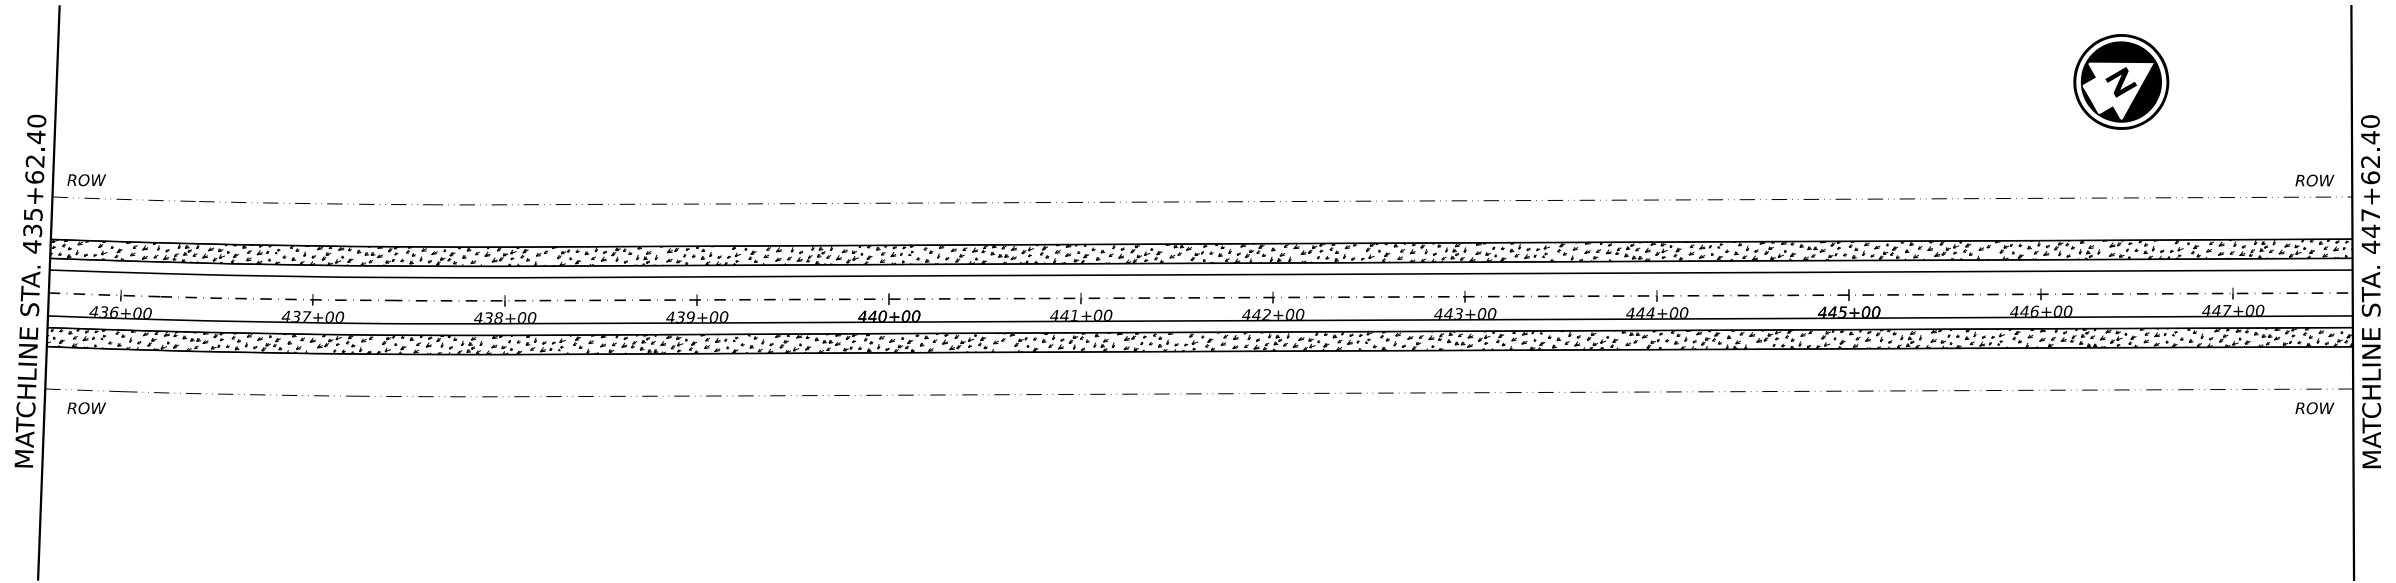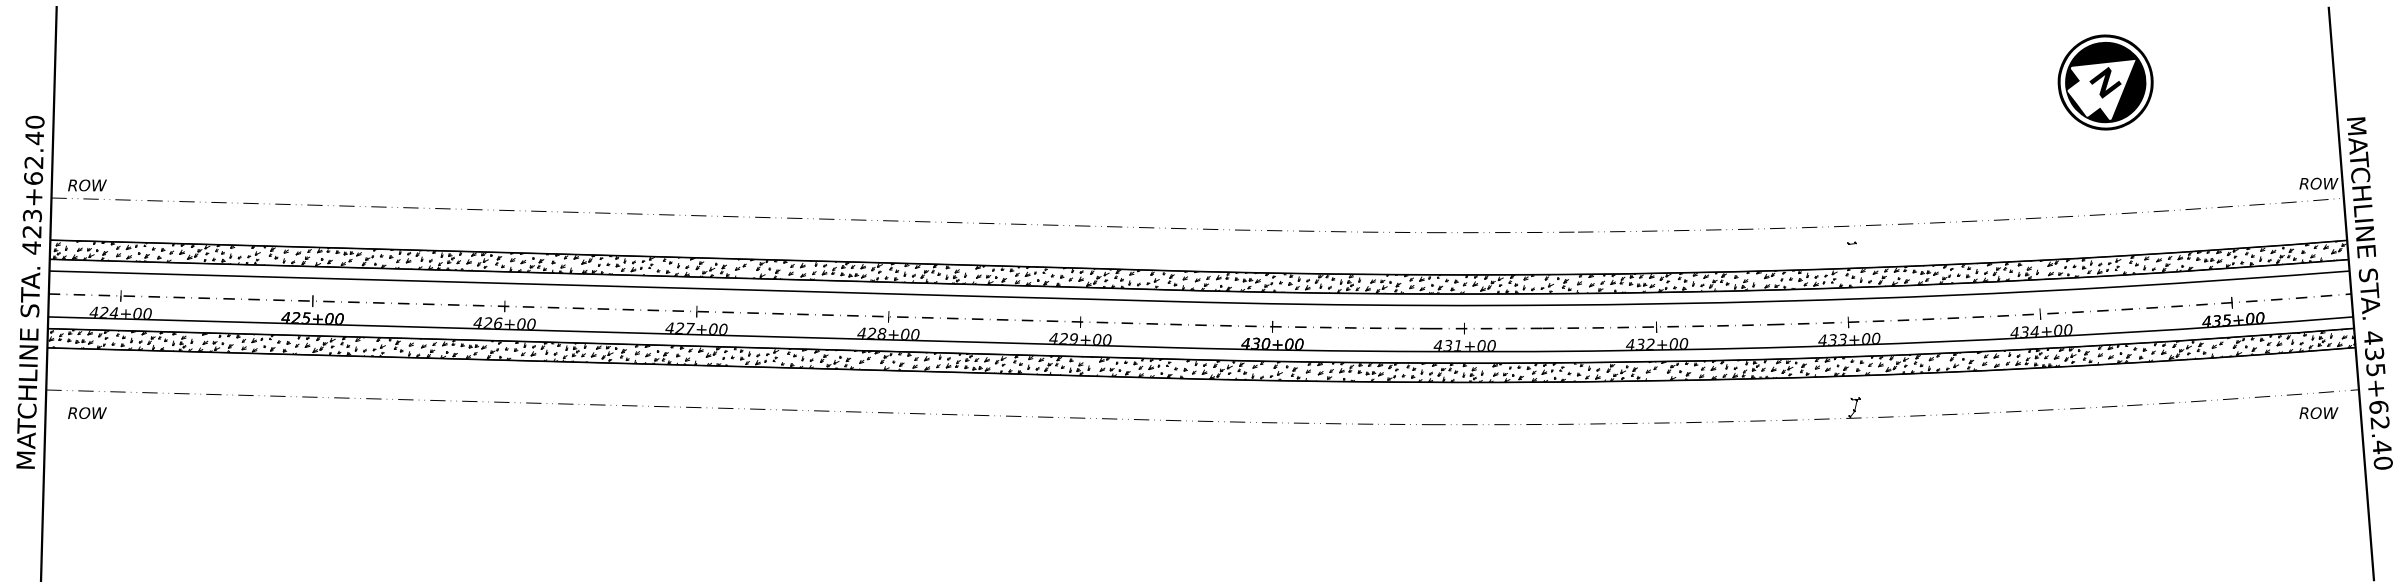

SEEDING AND EMULSION



Charles B. Steed, P.E.

08/08/2023



SWP3 LAYOUT

SHEET 4 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST		COUNTY	SHEET NO.
CHS		HALL	75

DATE: _____
 FILE: _____

DATE: _____
FILE: _____


CK:

DW:

CK:


DW:

MATCHLINE STA. 459+62.40

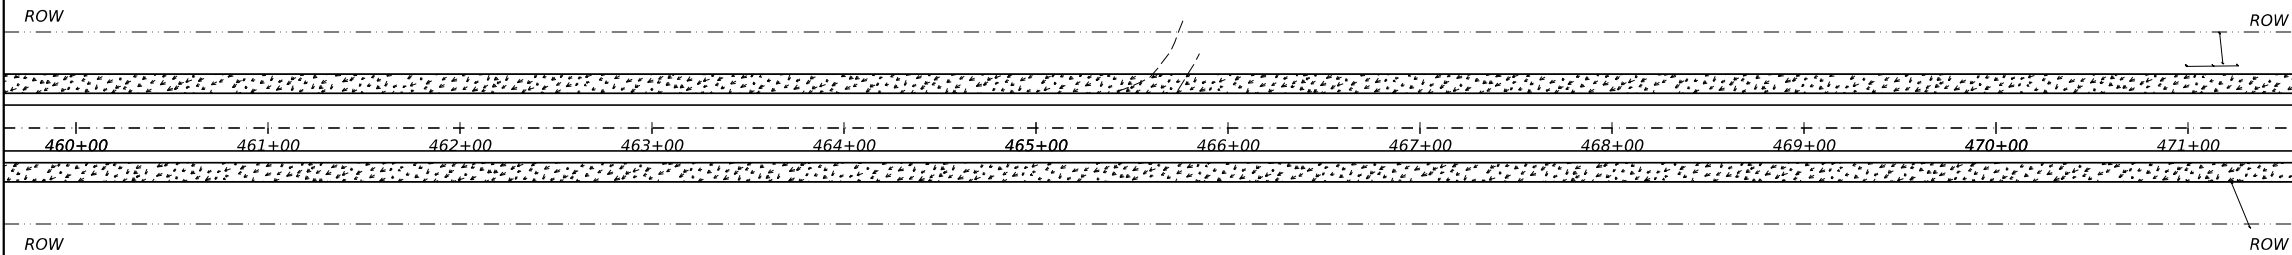


MATCHLINE STA. 471+62.40

MATCHLINE STA. 471+62.40

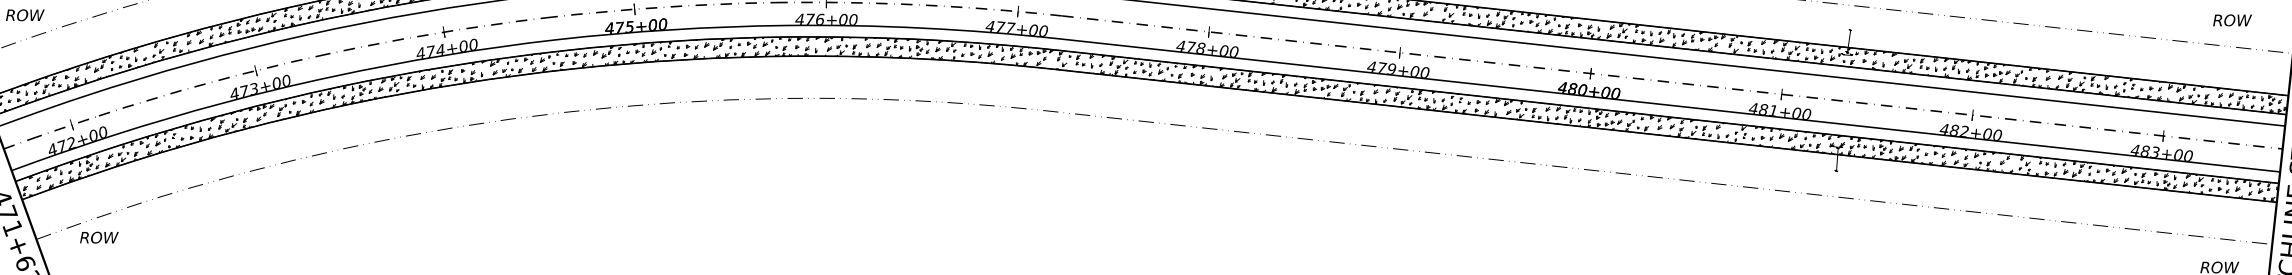

MATCHLINE STA. 483+62.40

MATCHLINE STA. 483+62.40

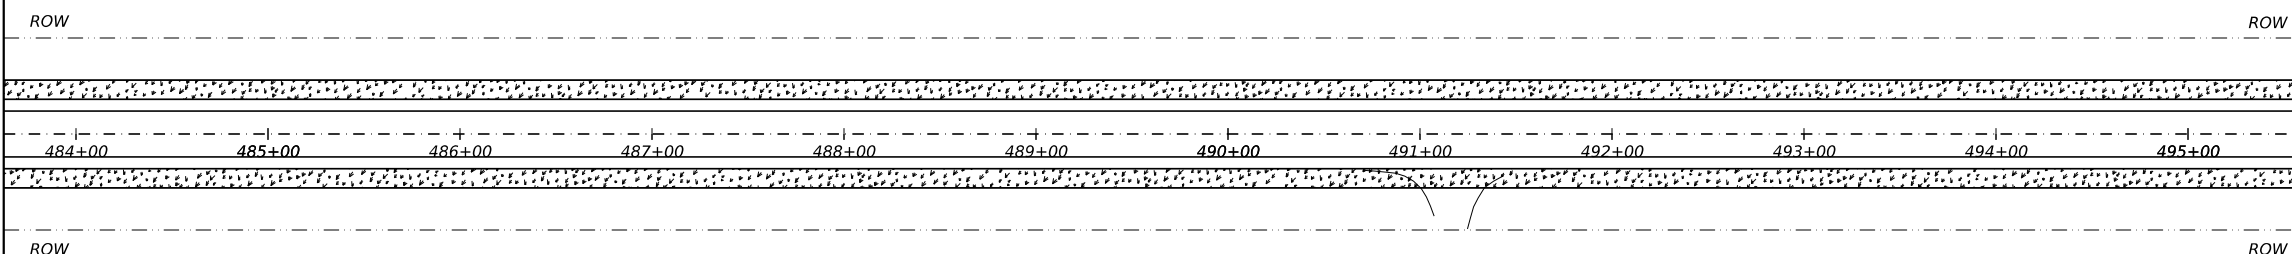

MATCHLINE STA. 495+62.40

SEEDING AND EMULSION

STATE OF TEXAS
CHARLES B. STEED
88647
LICENSED PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
08/08/2023

Texas Department of Transportation


SWP3 LAYOUT

SHEET 5 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	76	


DATE: _____
 FILE: _____
 DWG: _____
 CK: _____
 CC: _____

MATCHLINE STA. 495+62.40

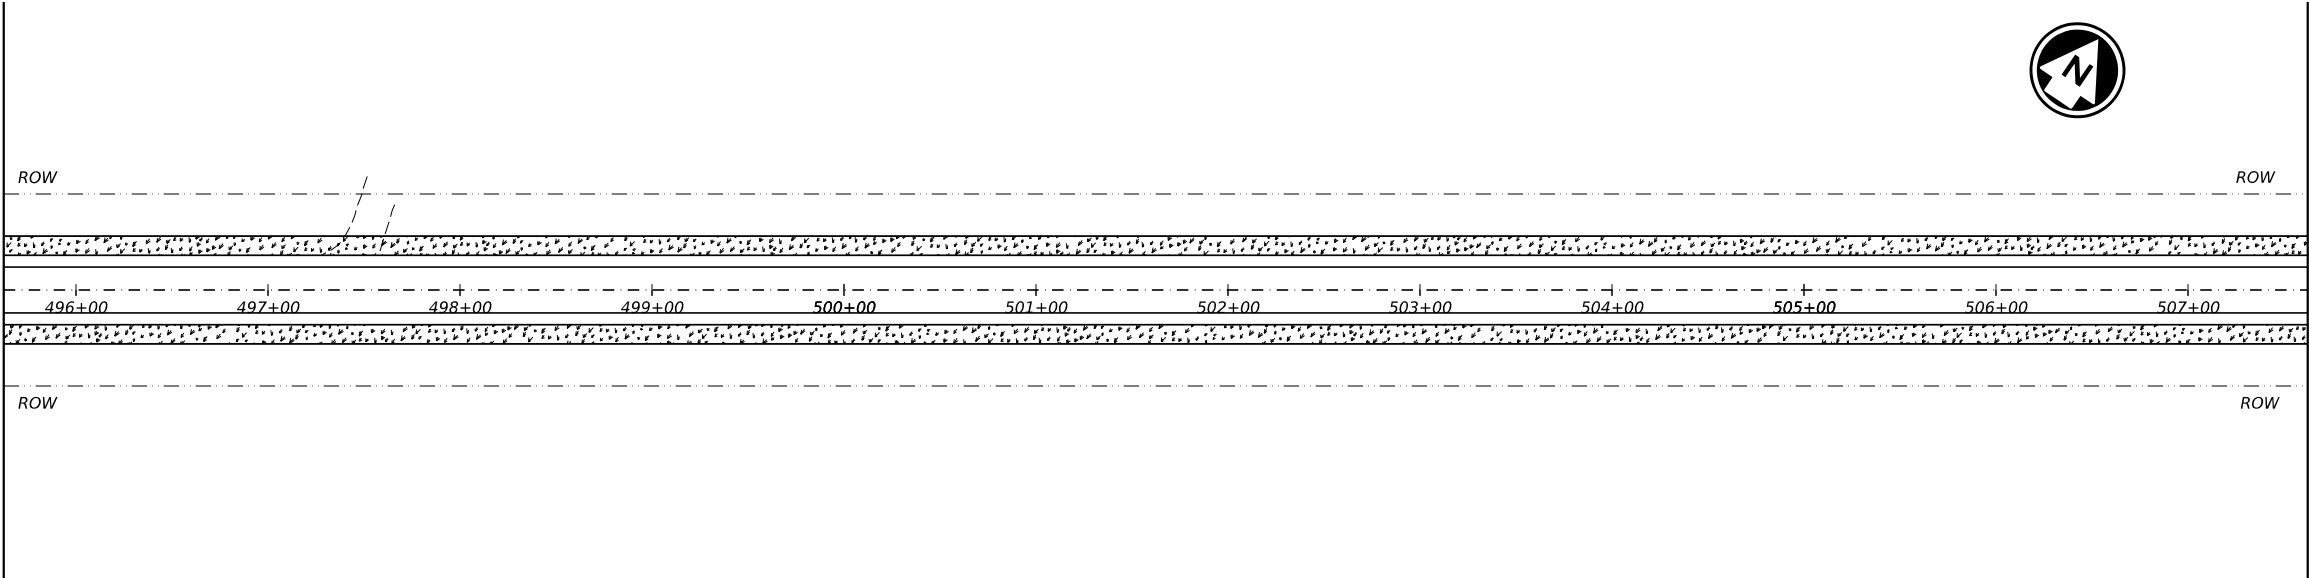


MATCHLINE STA. 507+62.40

MATCHLINE STA. 507+62.40

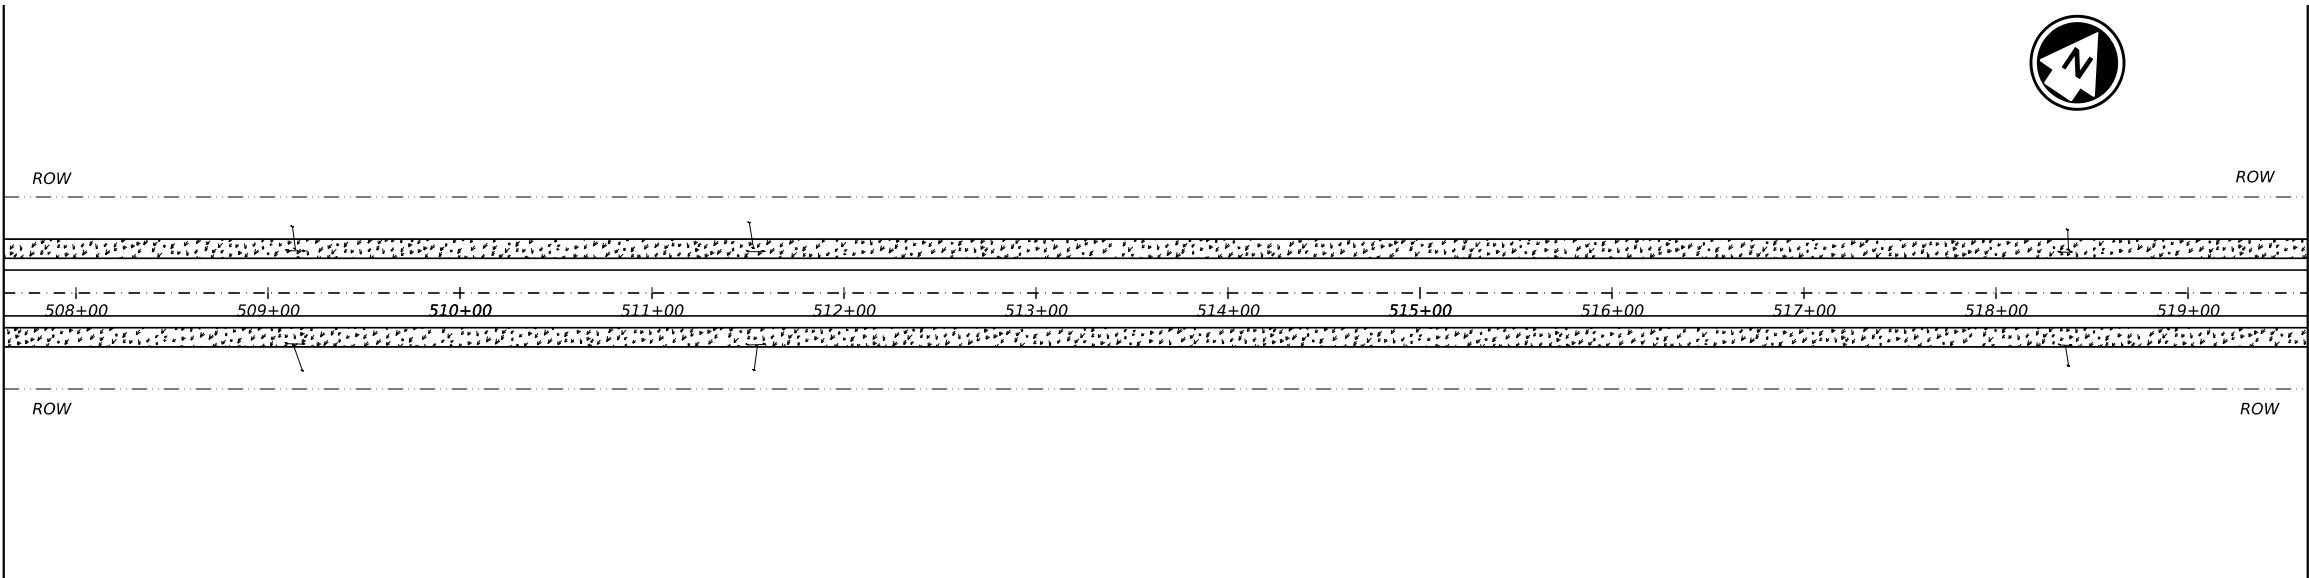

MATCHLINE STA. 519+62.40


MATCHLINE STA. 519+62.40

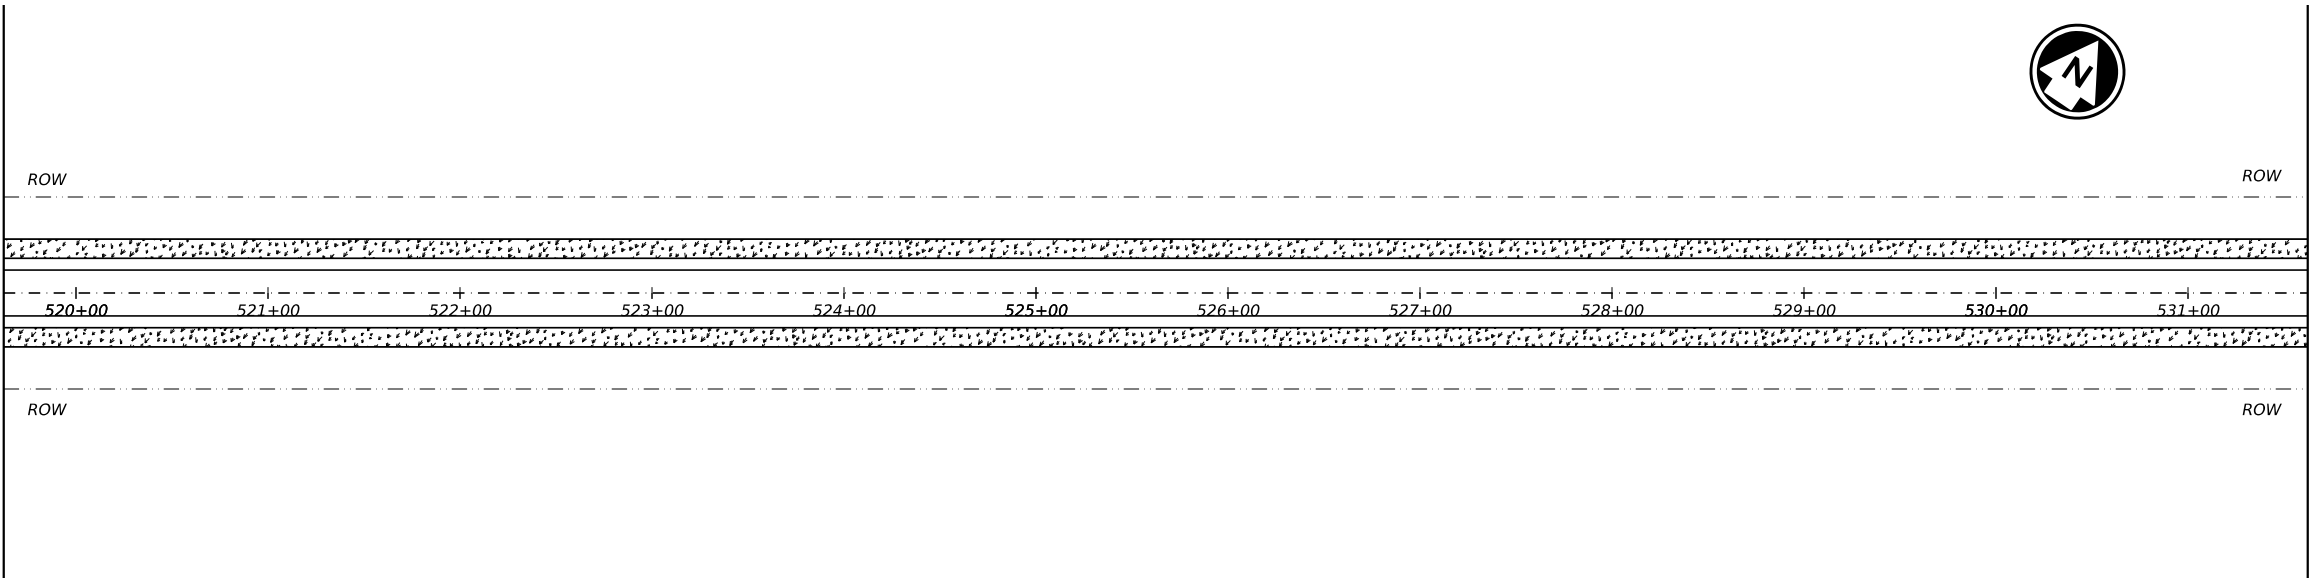

MATCHLINE STA. 531+62.40

 SEEDING AND EMULSION

STATE OF TEXAS
 CHARLES B. STEED
 88647
 LICENSED
 PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
 08/08/2023

 Texas Department of Transportation

SWP3 LAYOUT

SHEET 6 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	77	

DATE: _____
 FILE: _____


CK:

DW:

CK:


DW:

MATCHLINE STA. 531+62.40

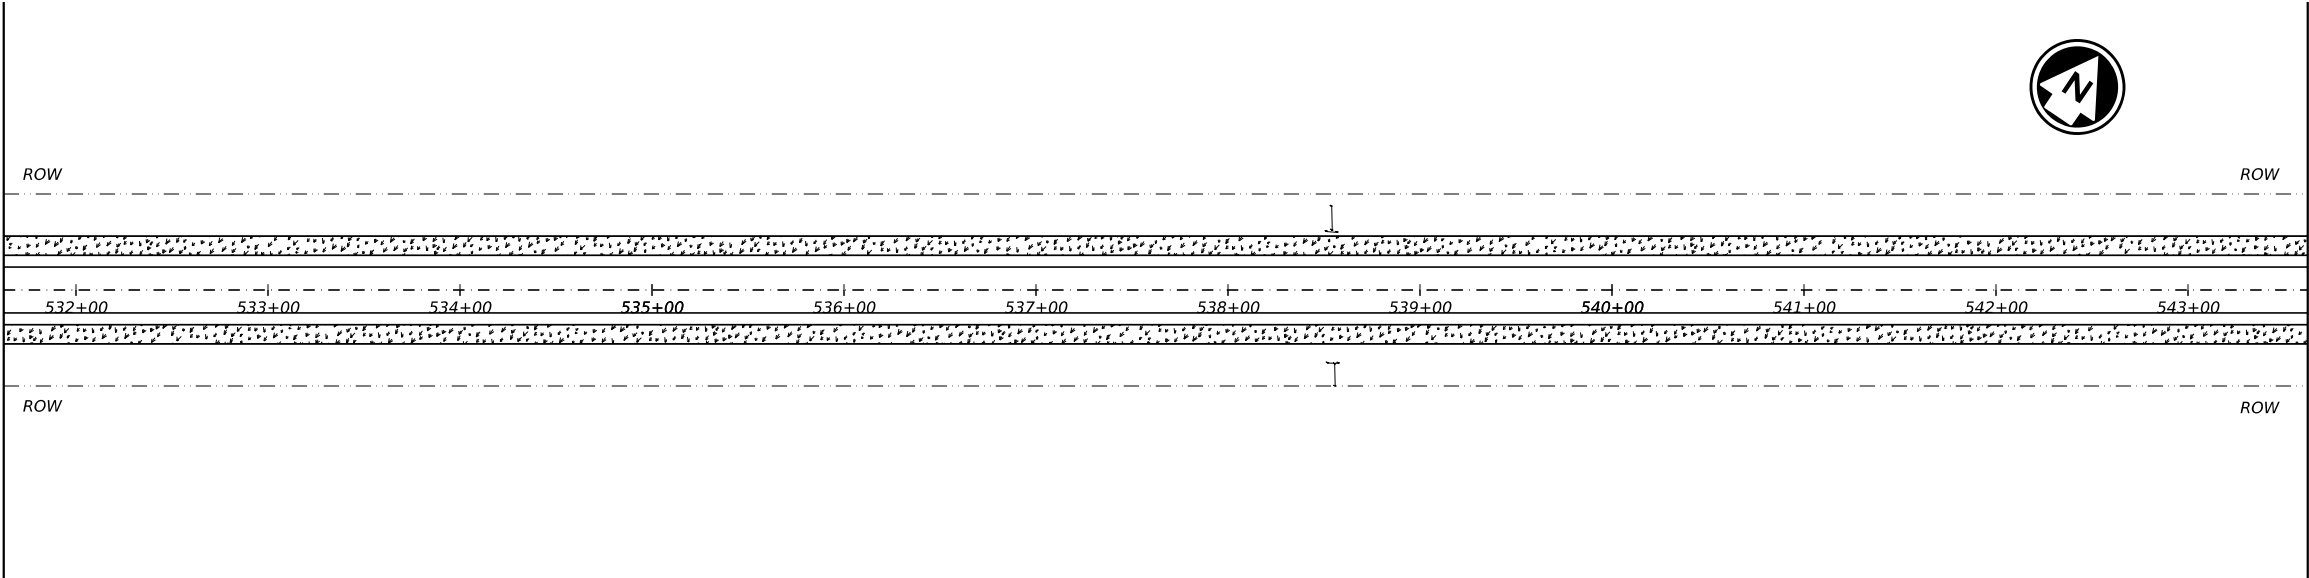


MATCHLINE STA. 543+62.40

MATCHLINE STA. 543+62.40

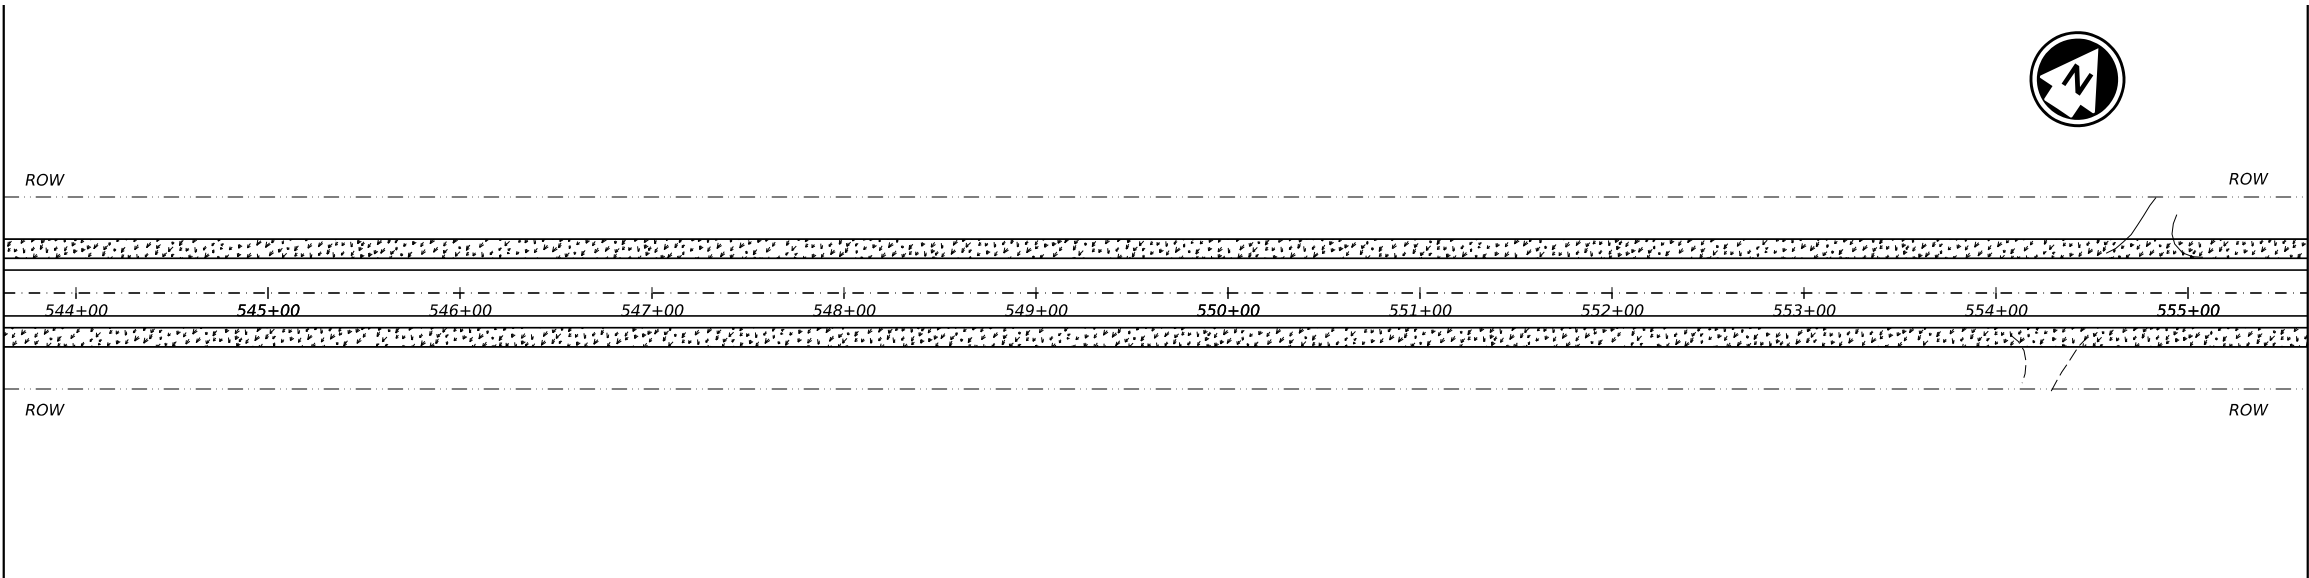

MATCHLINE STA. 555+62.40

MATCHLINE STA. 555+62.40

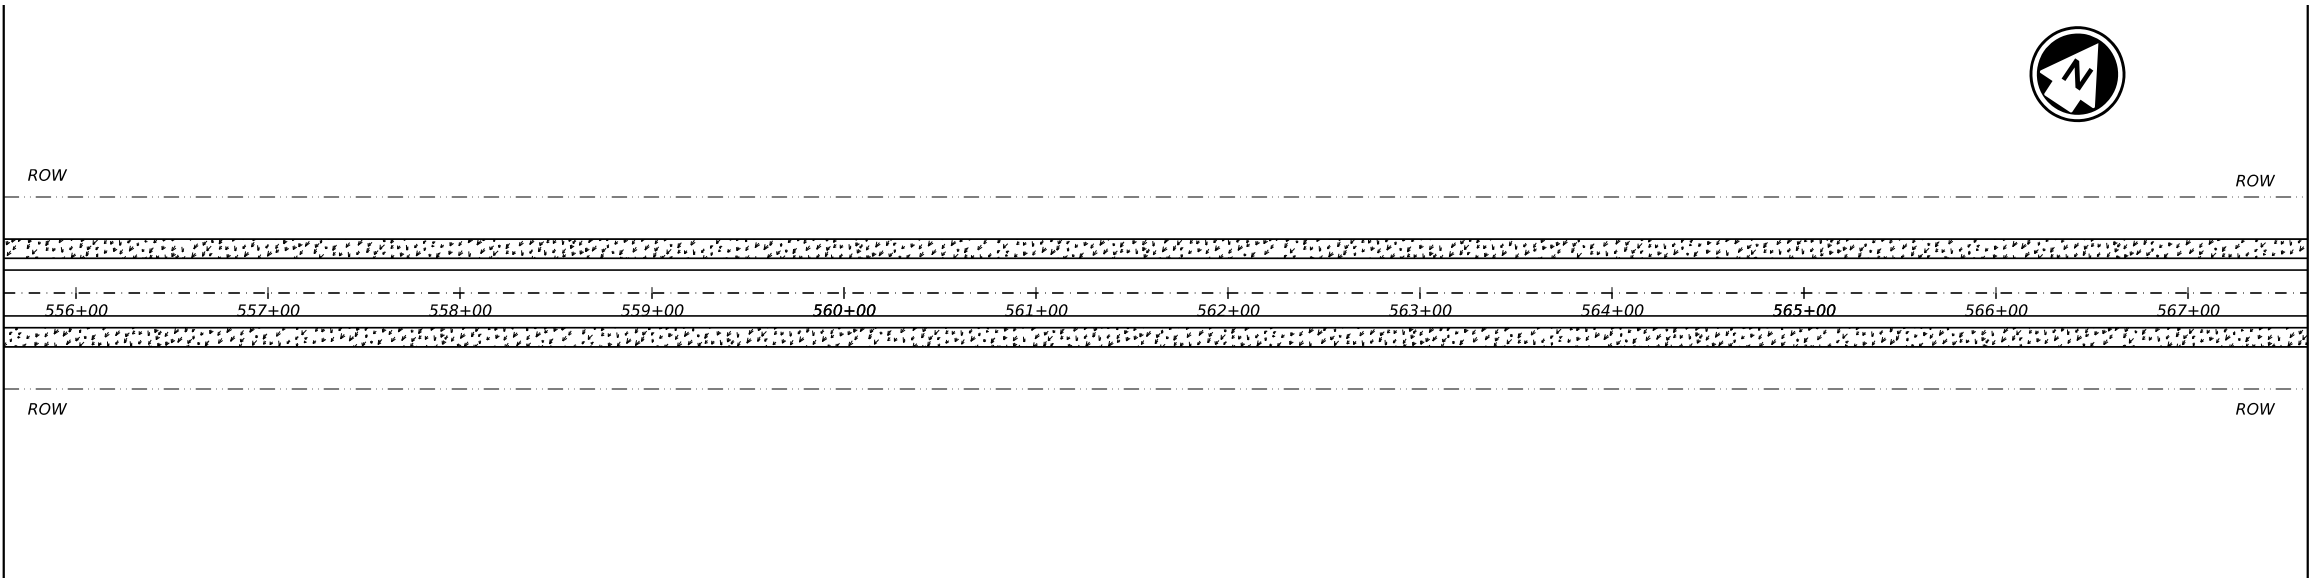

MATCHLINE STA. 567+62.40

 SEEDING AND EMULSION



Charles B. Steed, P.E.
 08/08/2023






SWP3 LAYOUT

SHEET 7 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	78	

CK: DW: CK: DW: CK: DW:

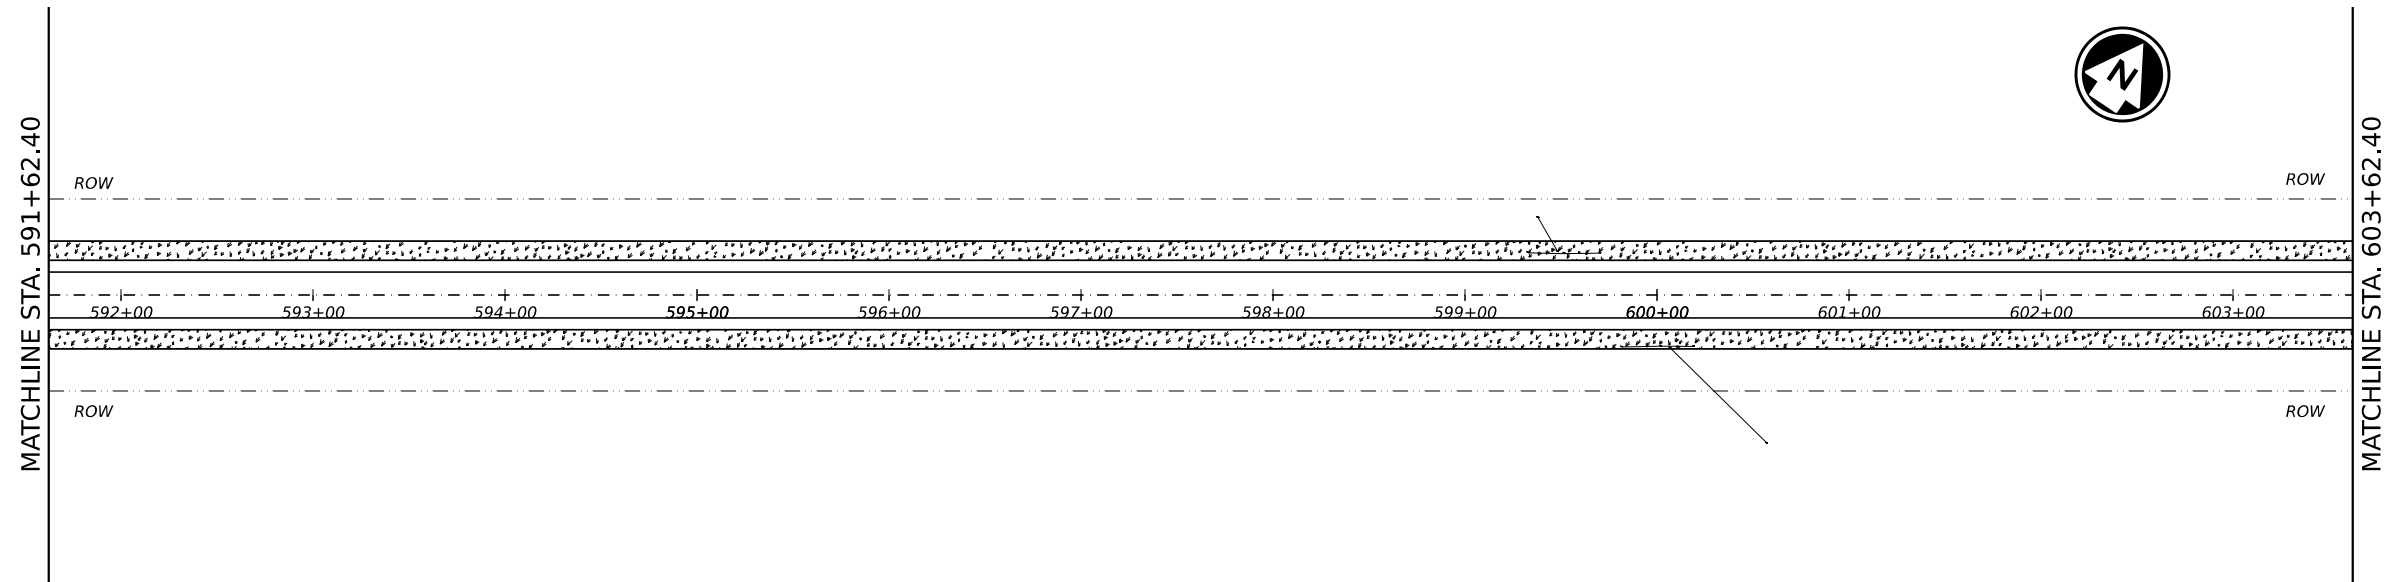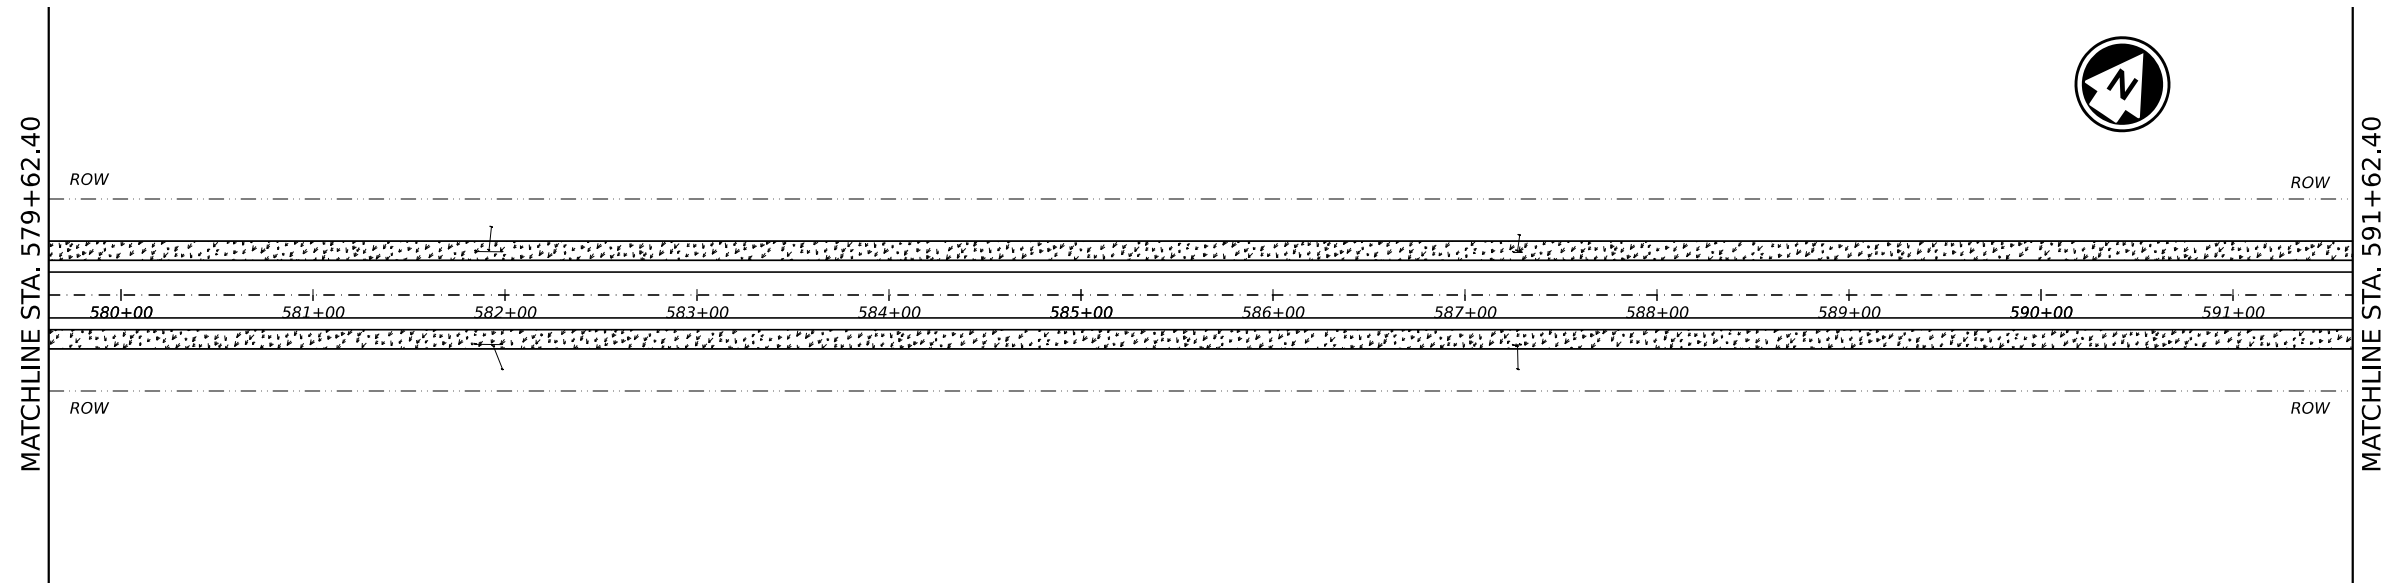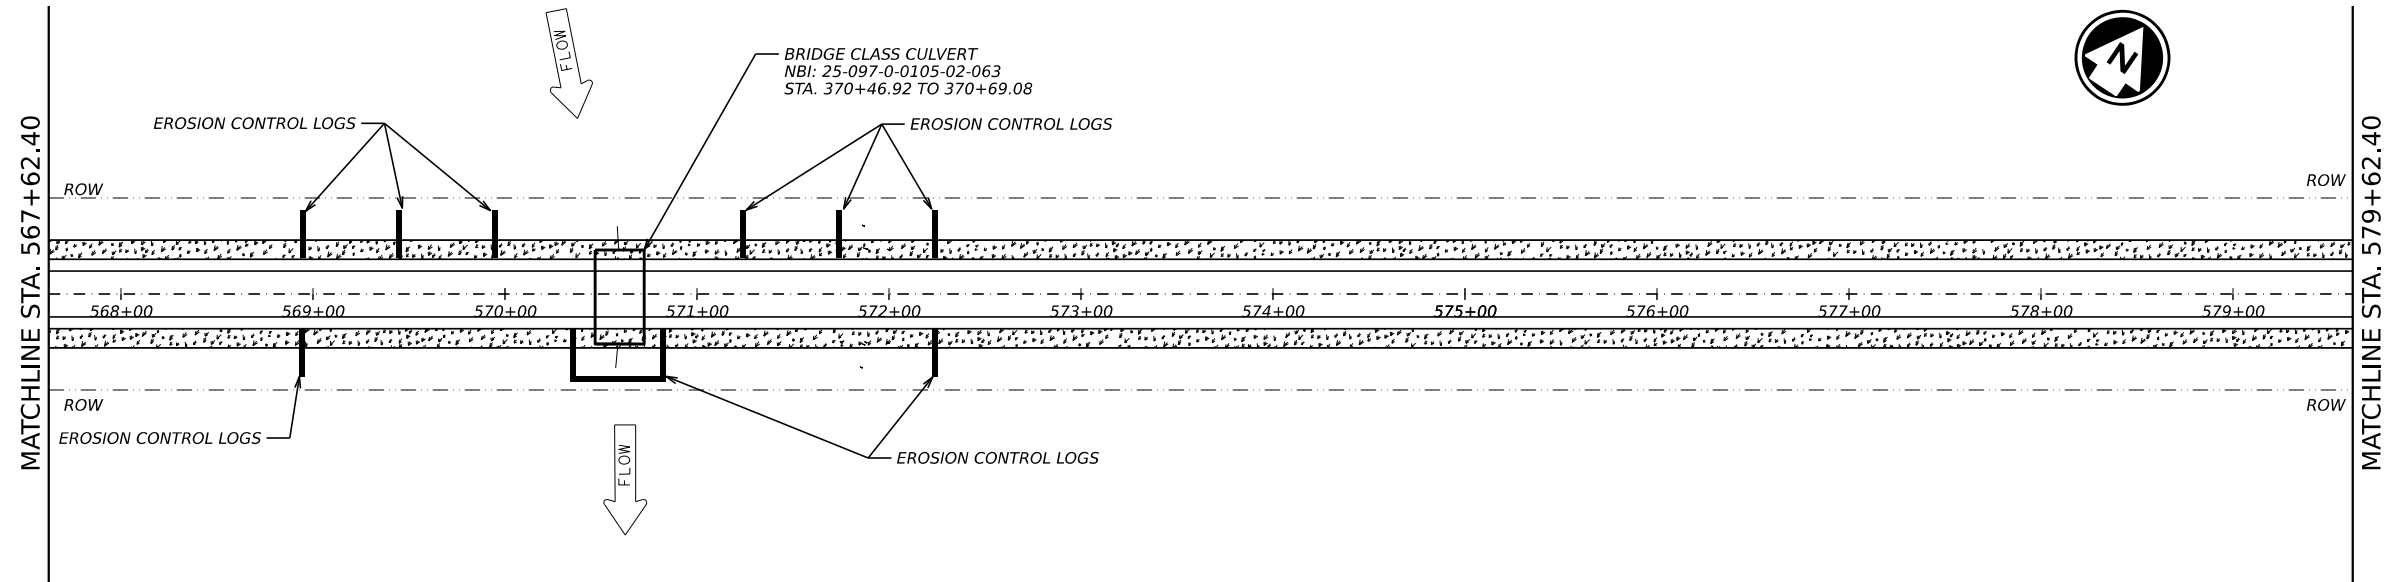

STATE OF TEXAS
 CHARLES B. STEED
 88647
 LICENSED
 PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
 08/08/2023



SWP3 LAYOUT

SHEET 8 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	79	

DATE:
 FILE:

DATE: _____
 FILE: _____


CK:

DW:

CK:


DW:

MATCHLINE STA. 603+62.40

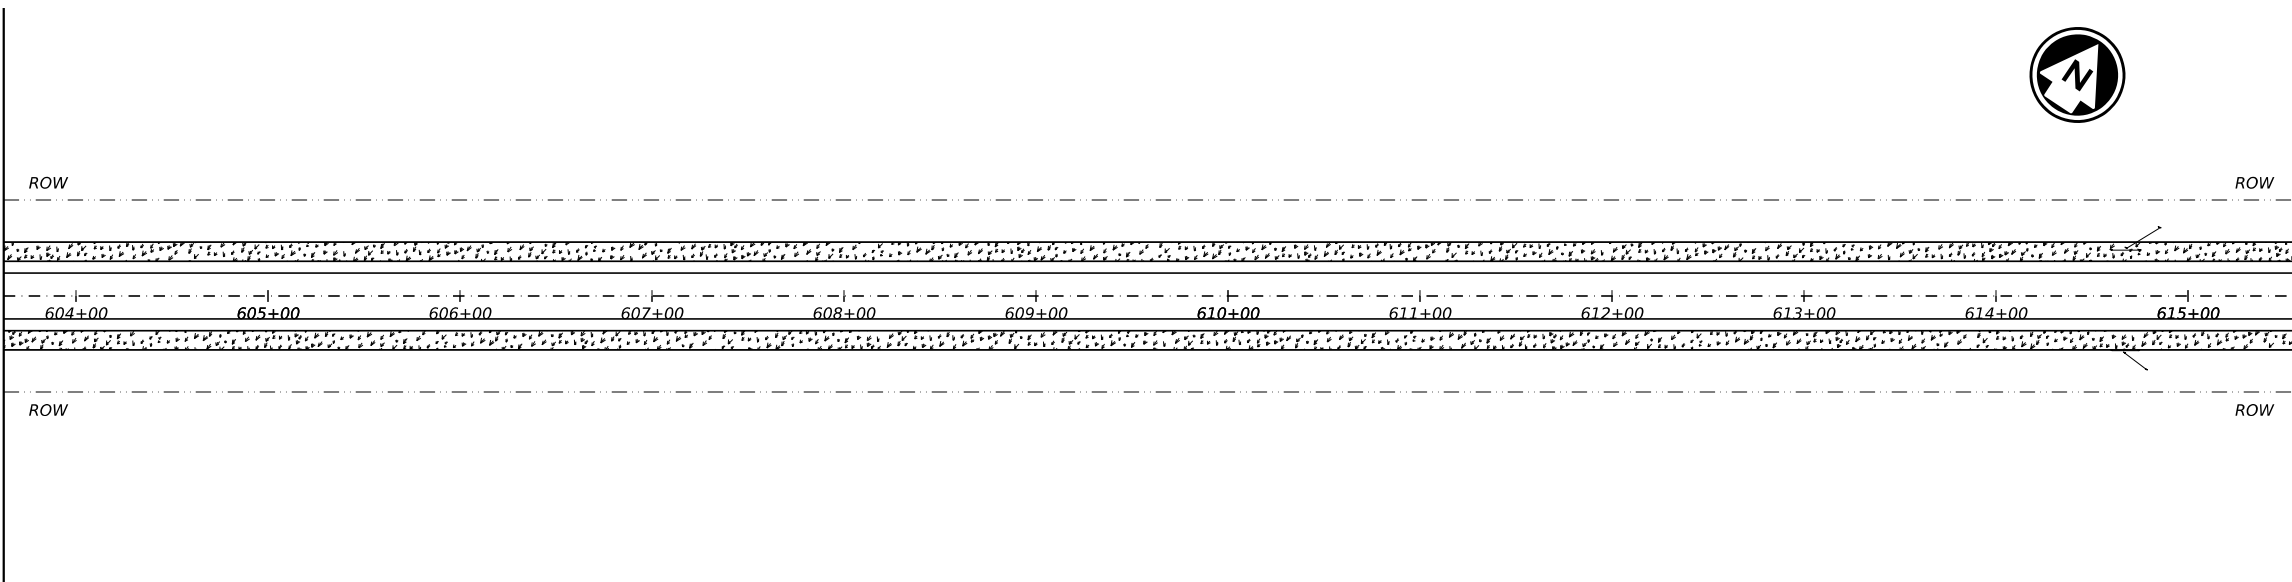


MATCHLINE STA. 615+62.40

MATCHLINE STA. 615+62.40

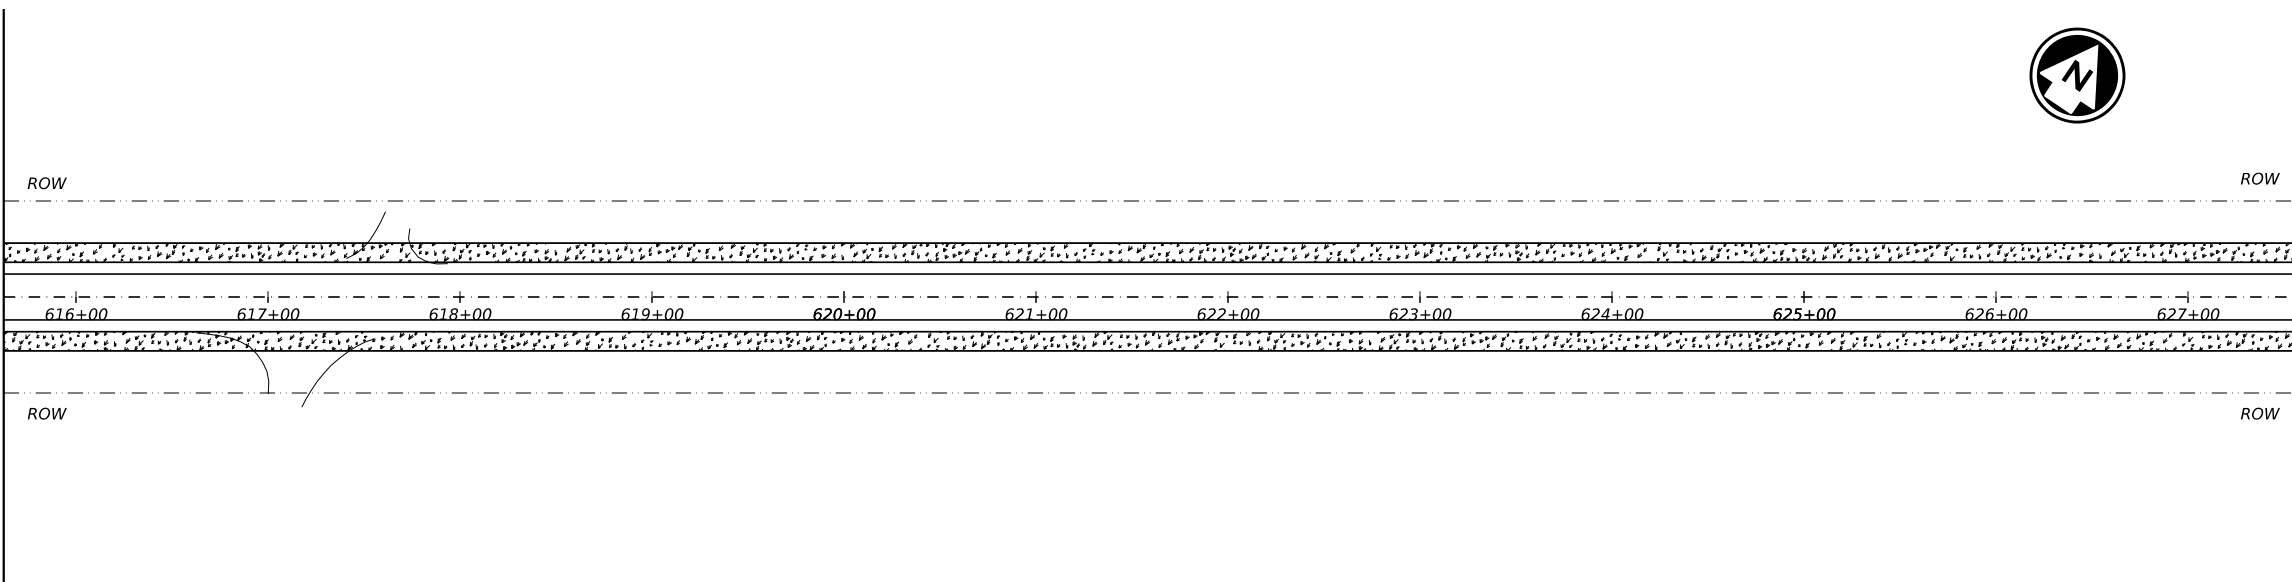

MATCHLINE STA. 627+62.40


MATCHLINE STA. 627+62.40

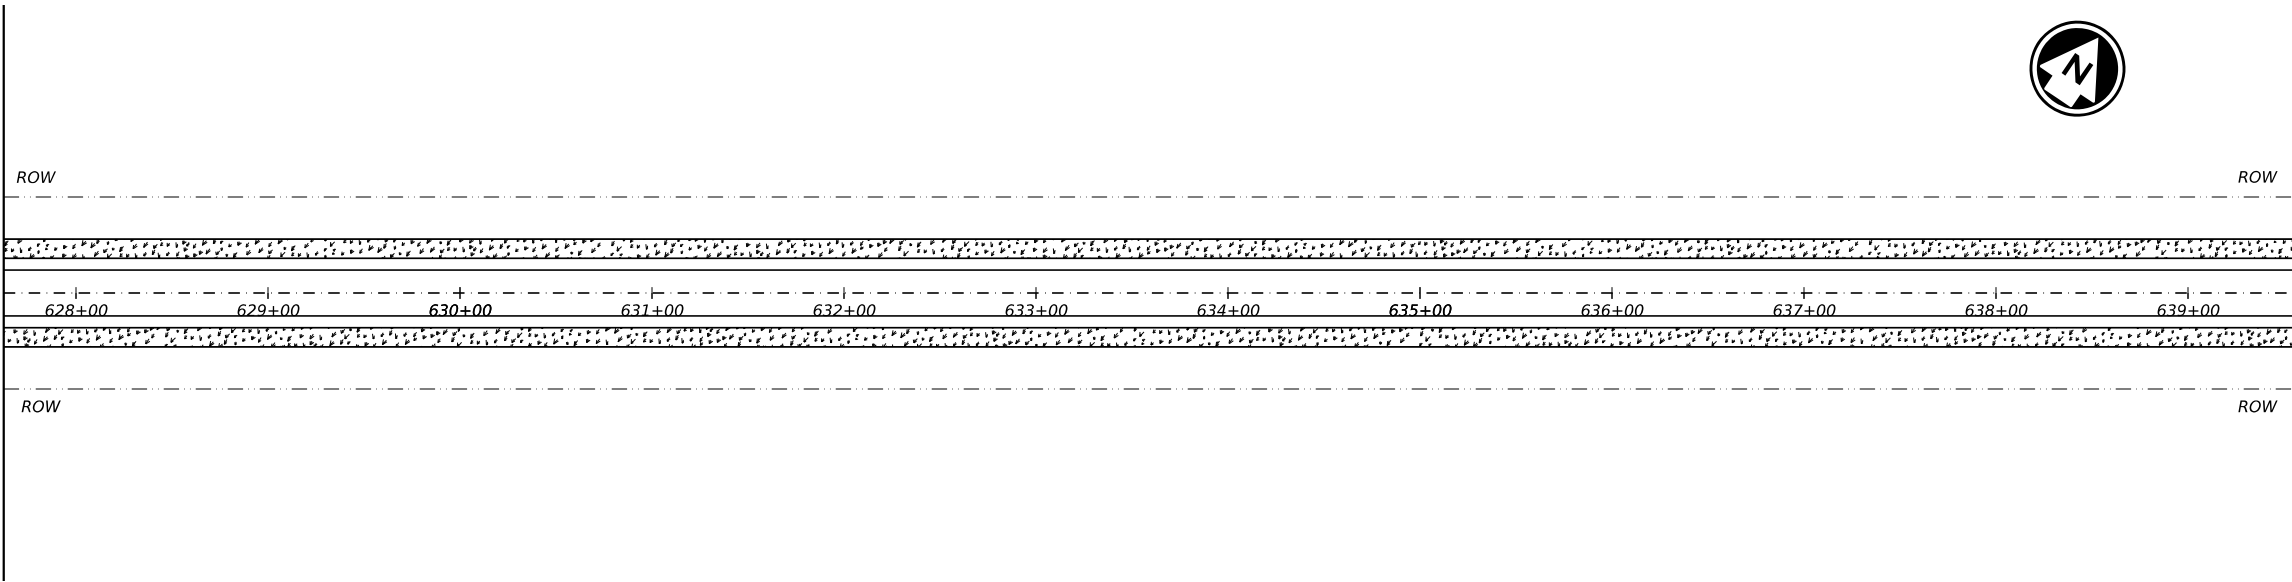

MATCHLINE STA. 639+62.40

 SEEDING AND EMULSION

STATE OF TEXAS
 CHARLES B. STEED
 88647
 LICENSED
 PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
 08/08/2023

 Texas Department of Transportation


SWP3 LAYOUT

SHEET 9 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	80	


DATE: FILE:
DW: CK: DW: CK: DW: CK:

MATCHLINE STA. 639+62.40

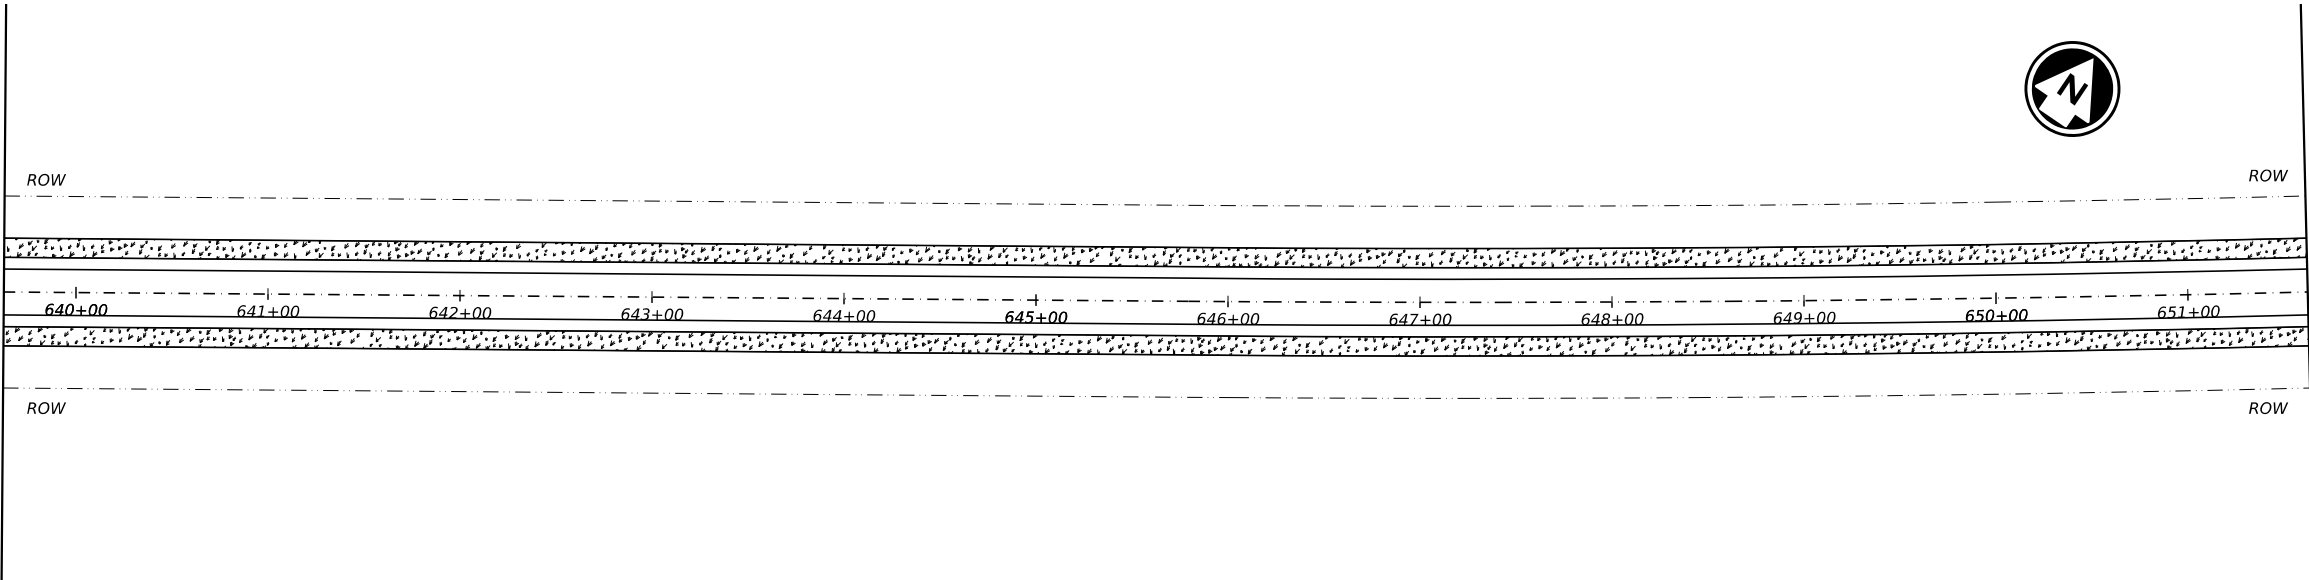


MATCHLINE STA. 651+62.40

MATCHLINE STA. 651+62.40

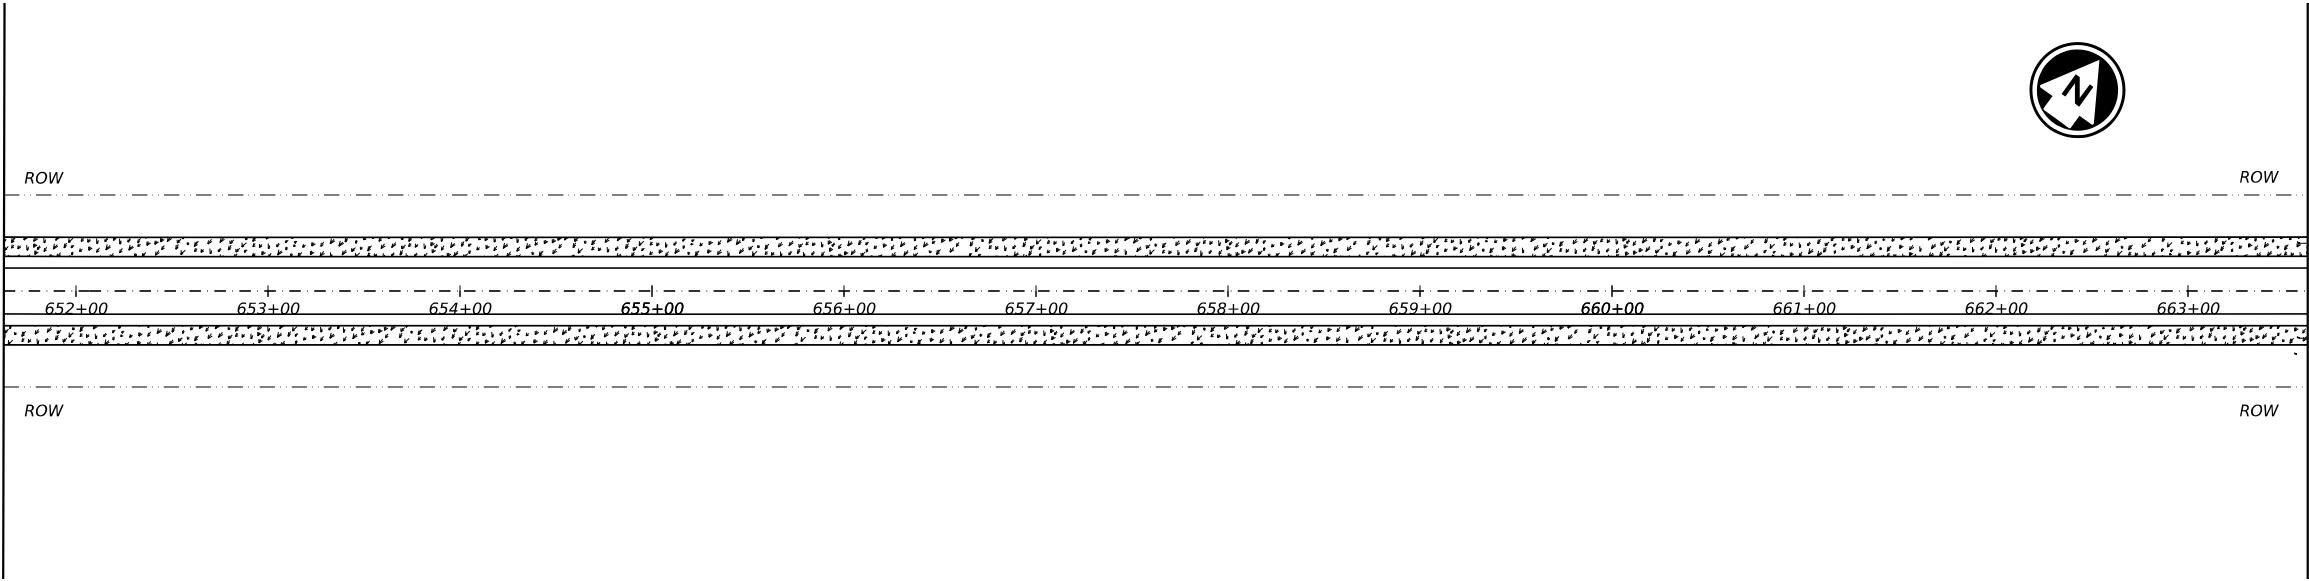

MATCHLINE STA. 663+62.40


MATCHLINE STA. 663+62.40

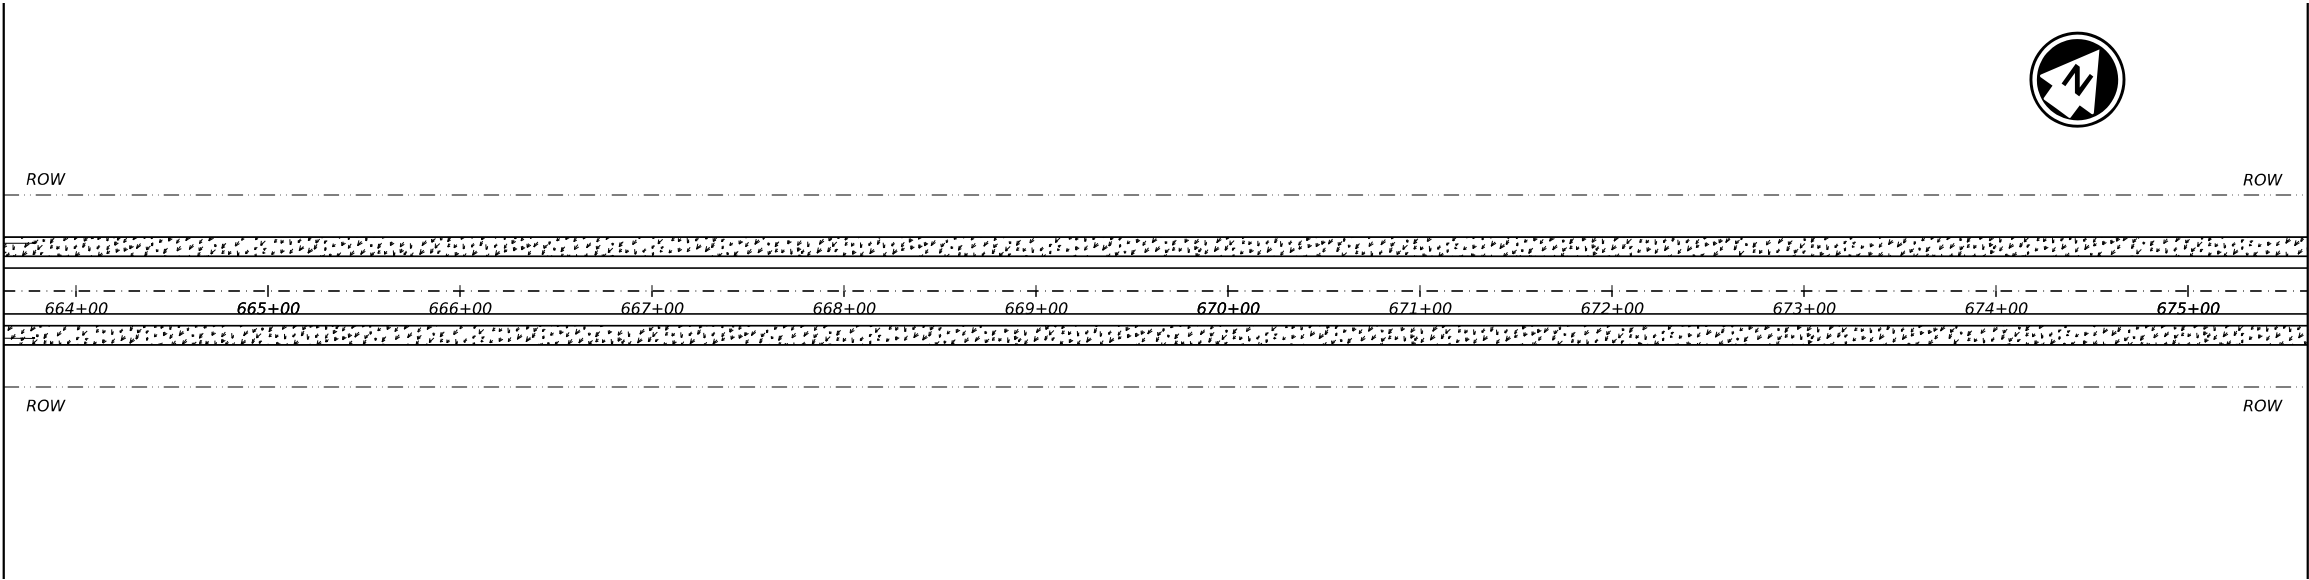

MATCHLINE STA. 675+62.40

 SEEDING AND EMULSION

STATE OF TEXAS
CHARLES B. STEED
88647
LICENSED
PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
08/08/2023


 Texas Department of Transportation

SWP3 LAYOUT



SHEET 10 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	81	

CK: DW: CK: DN:

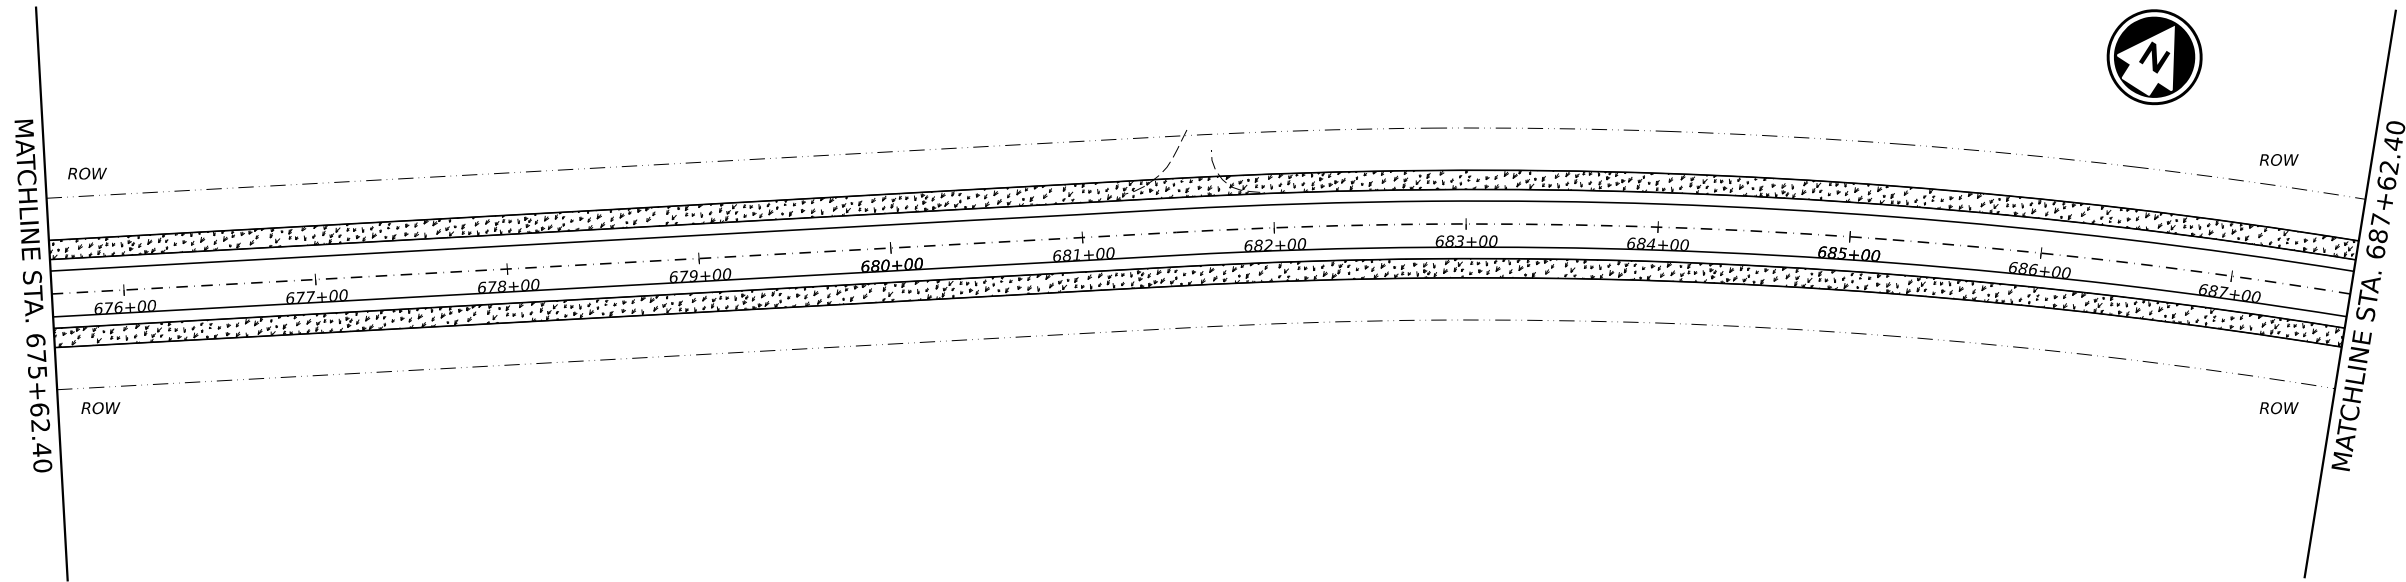

SEEDING AND EMULSION

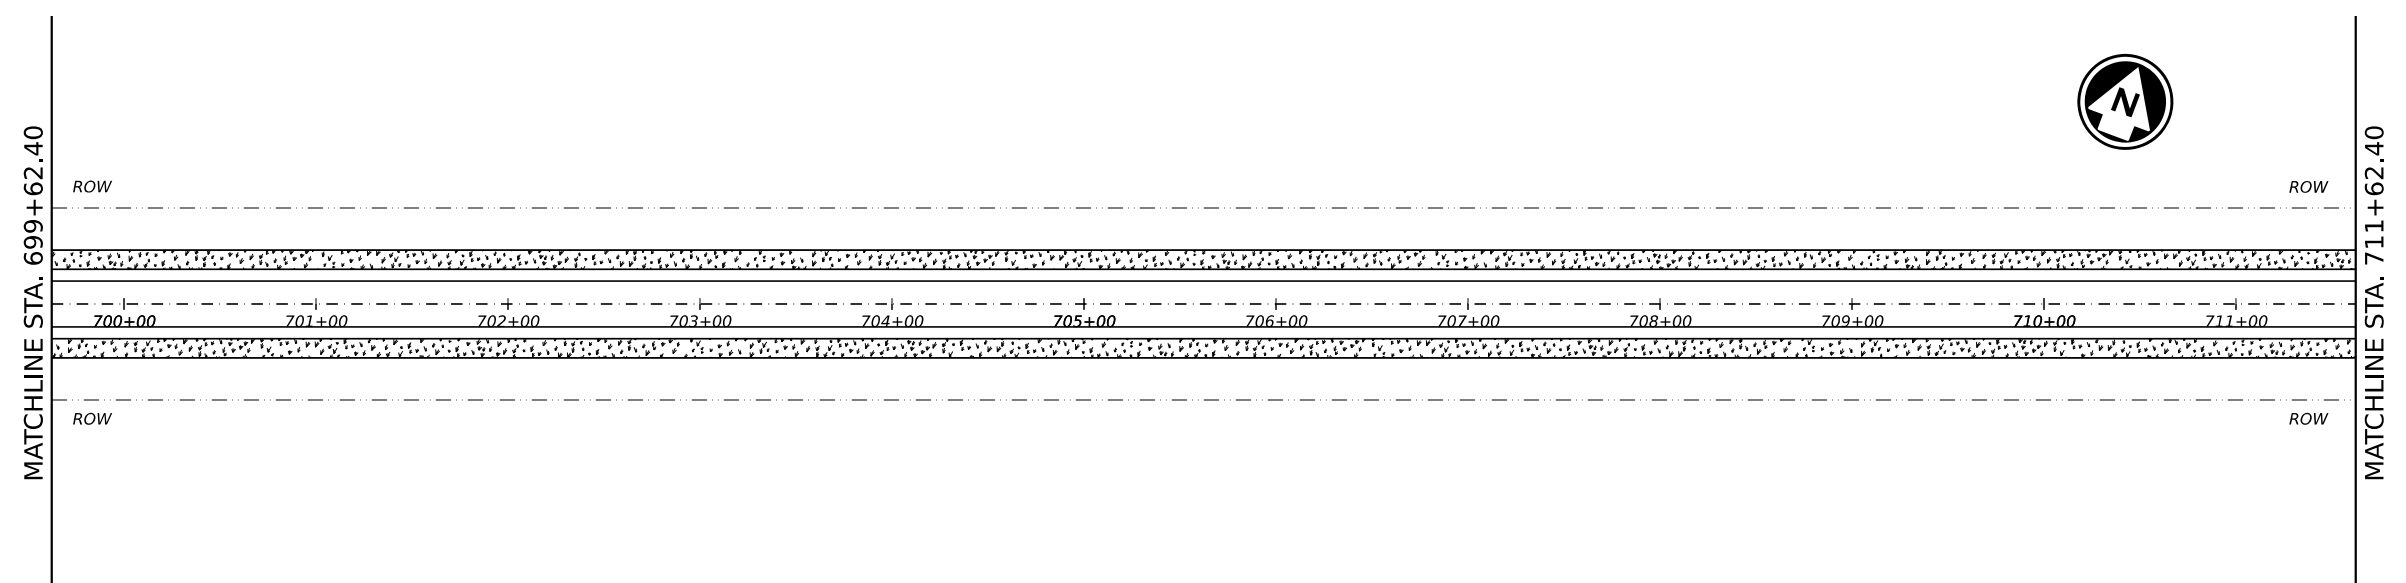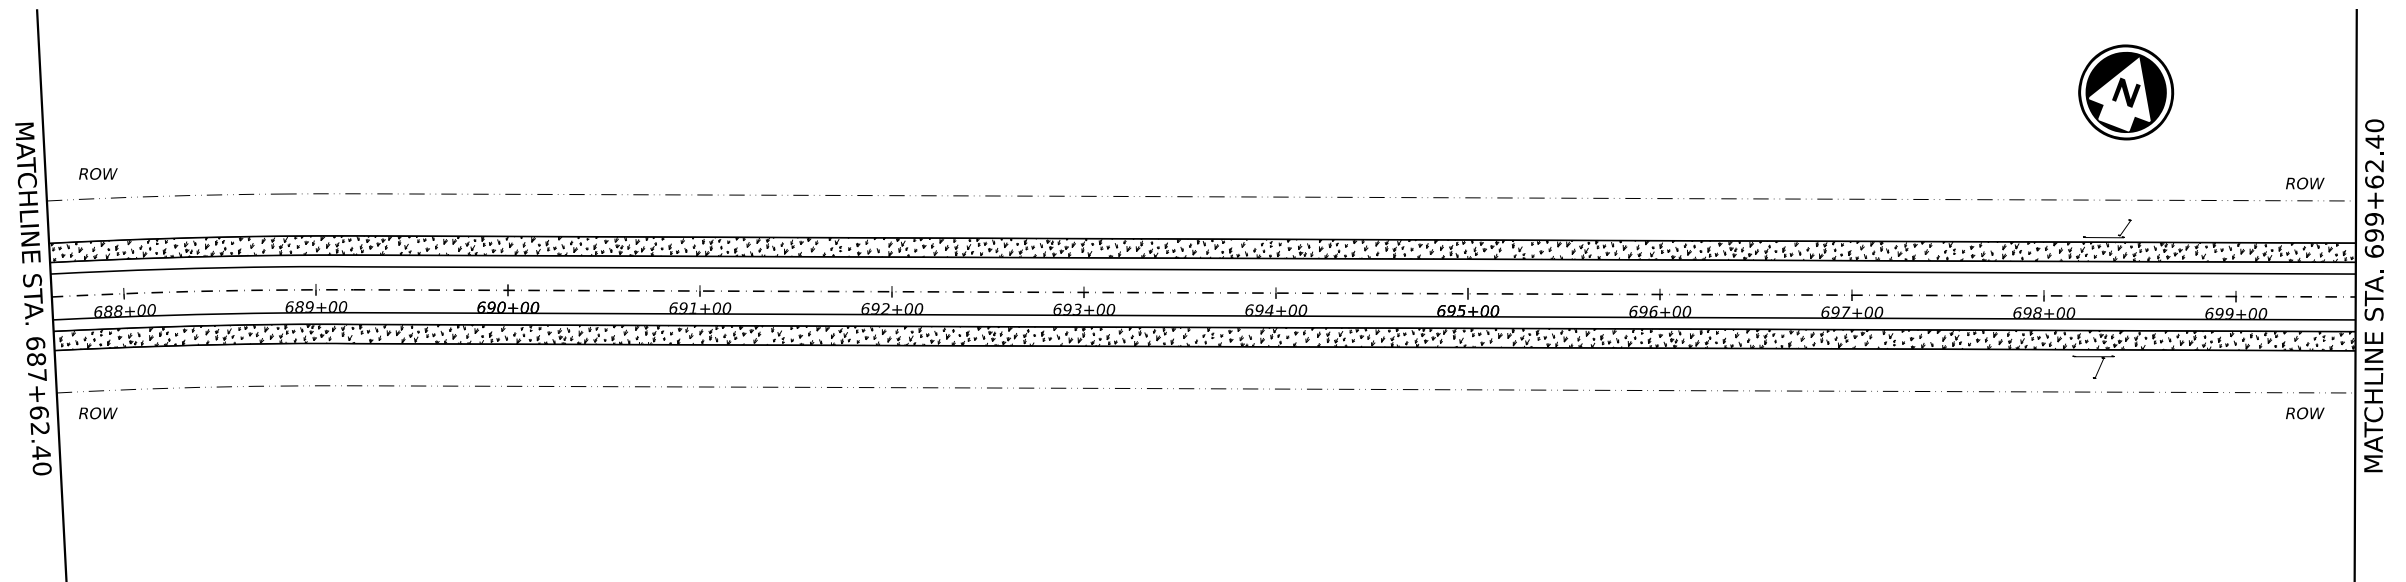

STATE OF TEXAS
 CHARLES B. STEED
 88647
 LICENSED PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
 08/08/2023



SWP3 LAYOUT

SHEET 11 OF 13


CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY	SHEET NO.	
CHS	HALL	82	

DATE: FILE:

DATE: _____
 FILE: _____


DATE: _____
 FILE: _____

MATCHLINE STA. 711+62.40

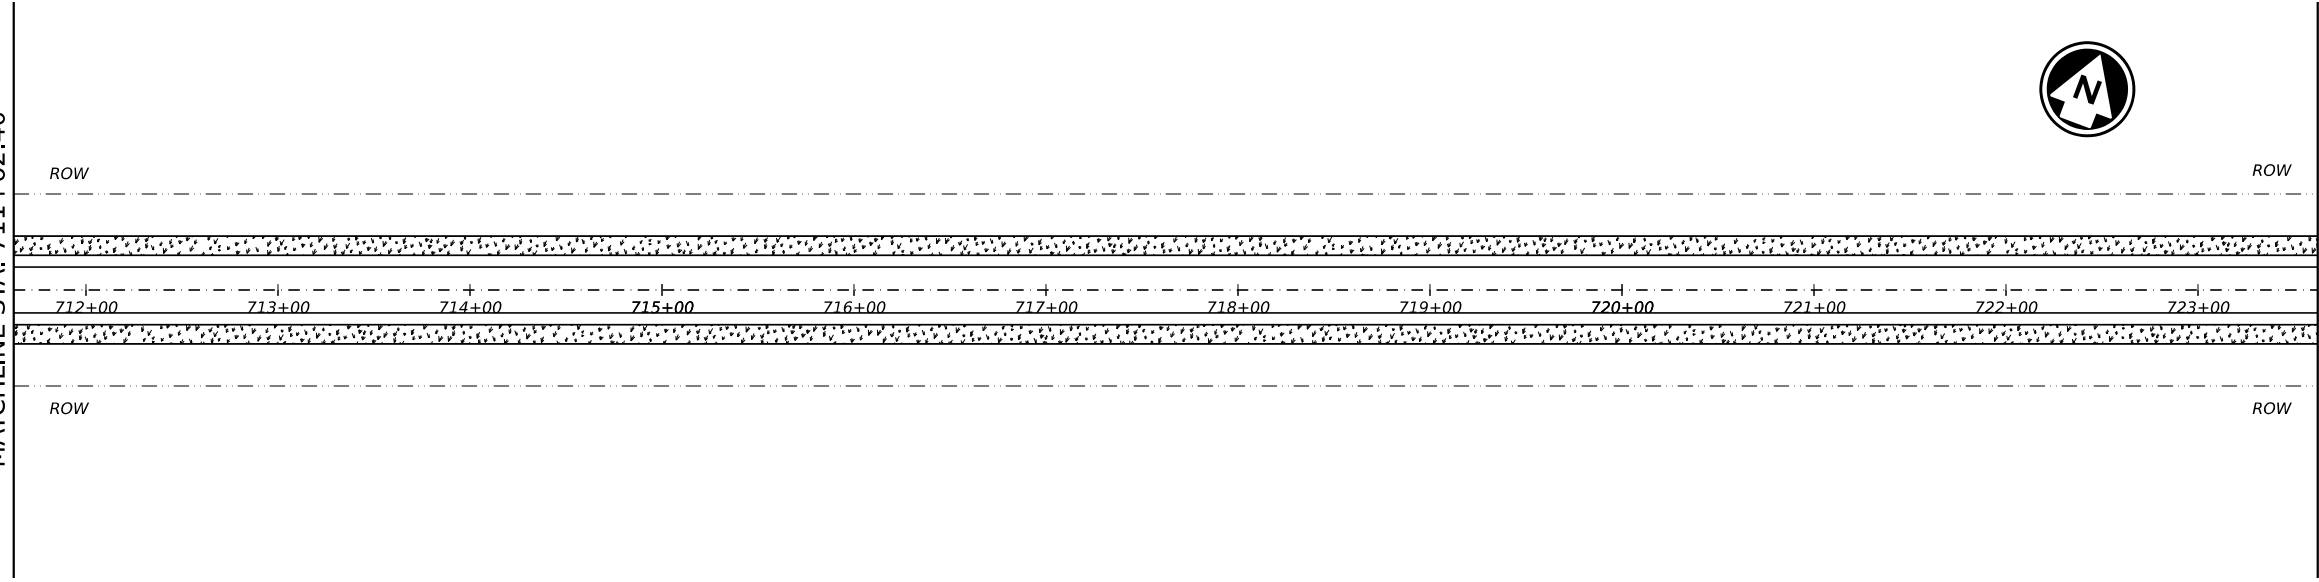


MATCHLINE STA. 723+62.40

MATCHLINE STA. 723+62.40

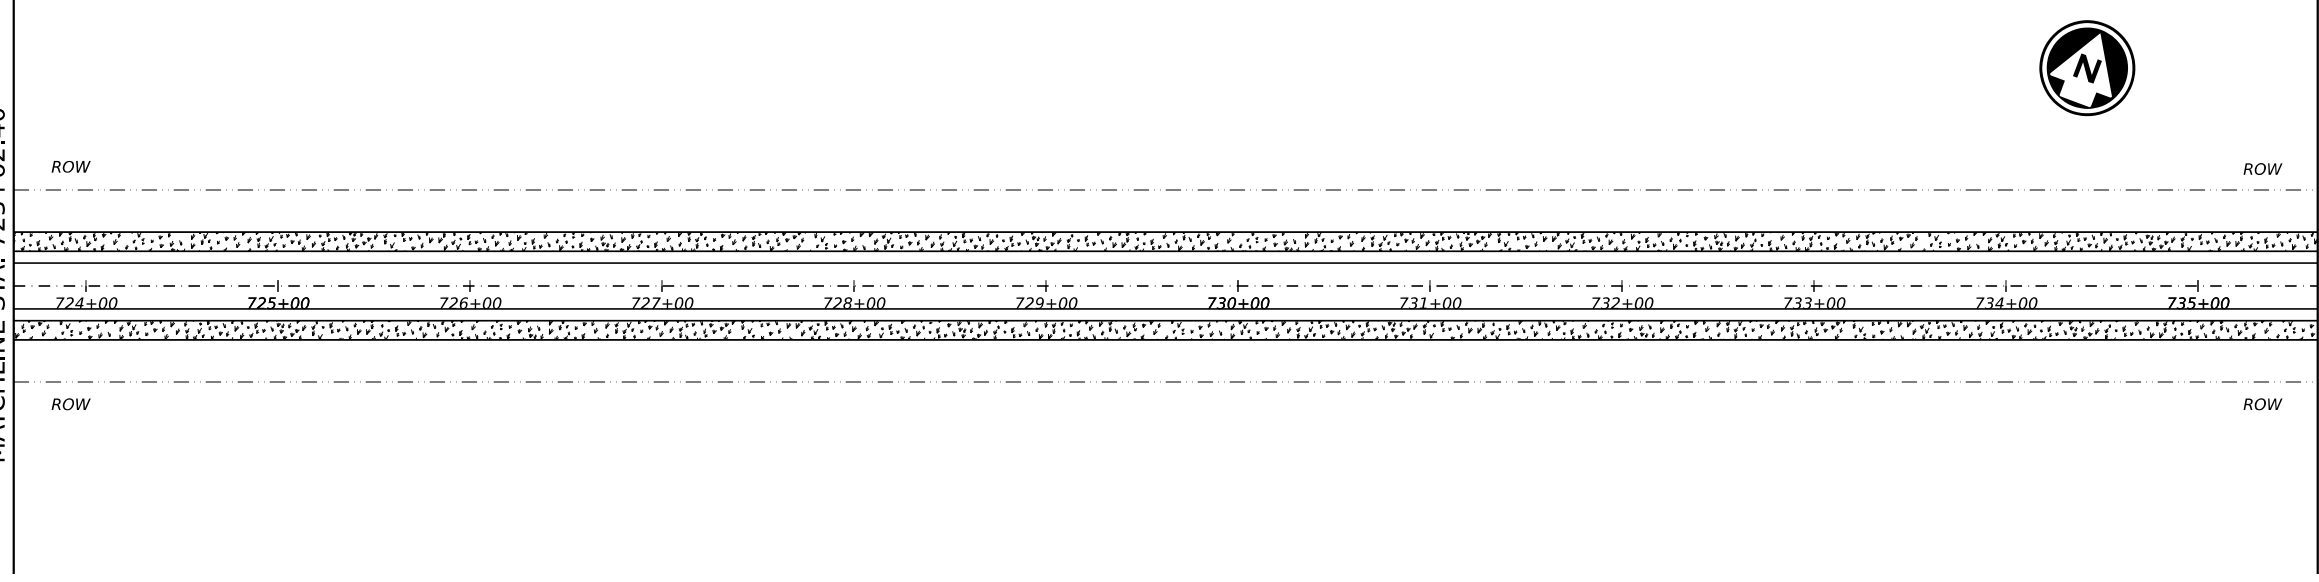


MATCHLINE STA. 735+62.40

MATCHLINE STA. 735+62.40

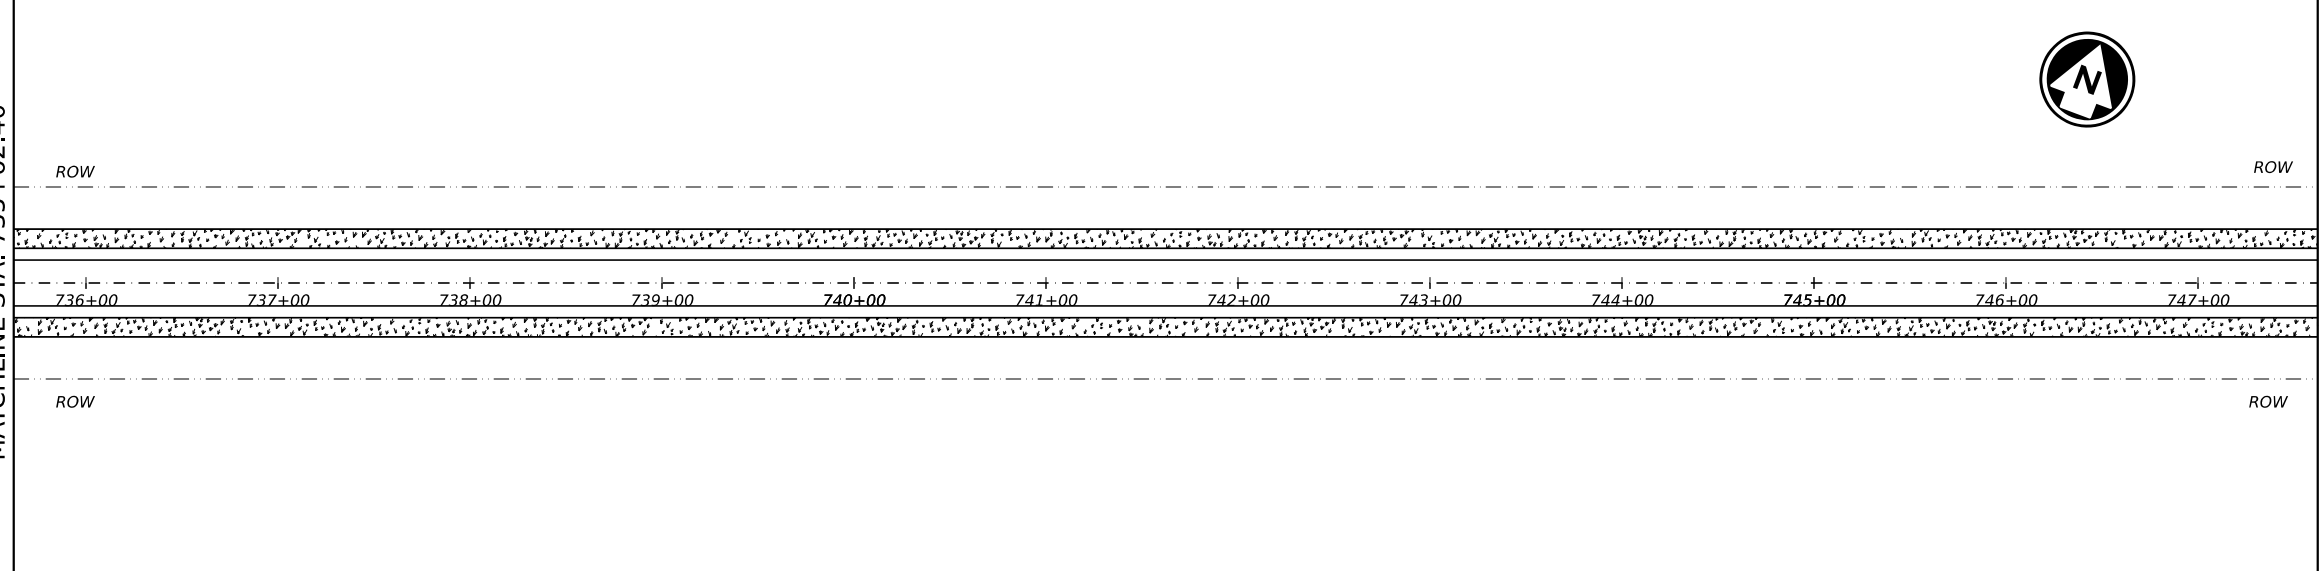

MATCHLINE STA. 747+62.40

 SEEDING AND EMULSION

STATE OF TEXAS
 CHARLES B. STEED
 88647
 LICENSED
 PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
 08/08/2023

 Texas Department of Transportation




SWP3 LAYOUT

SHEET 12 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY		SHEET NO.
CHS	HALL		83


DATE: _____
 FILE: _____

DATE: _____
 FILE: _____

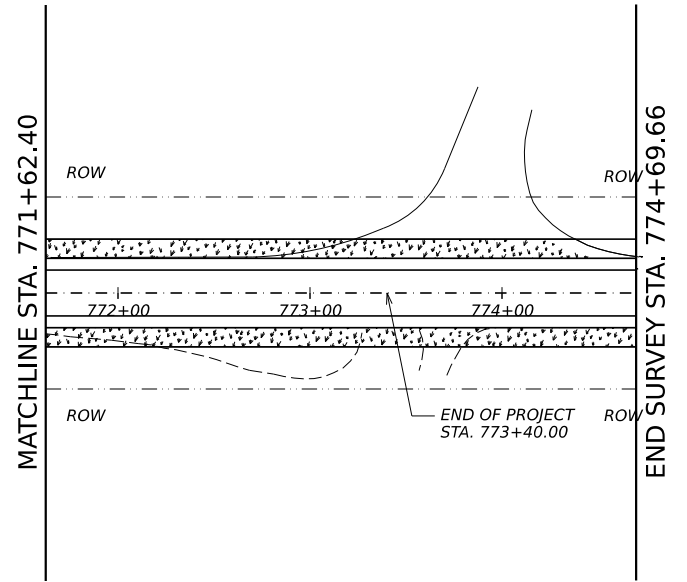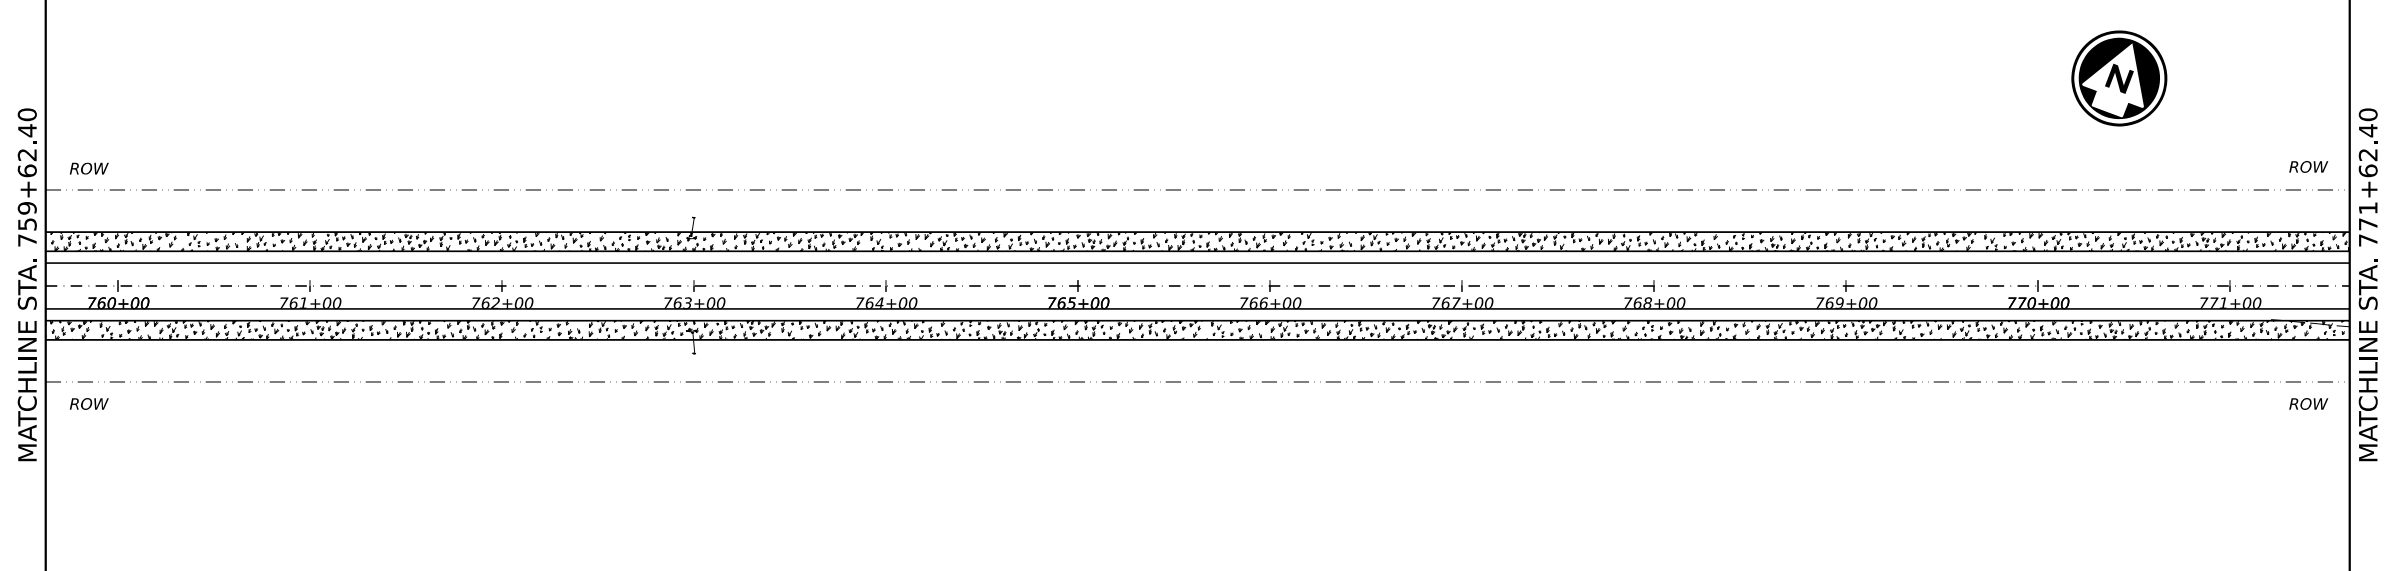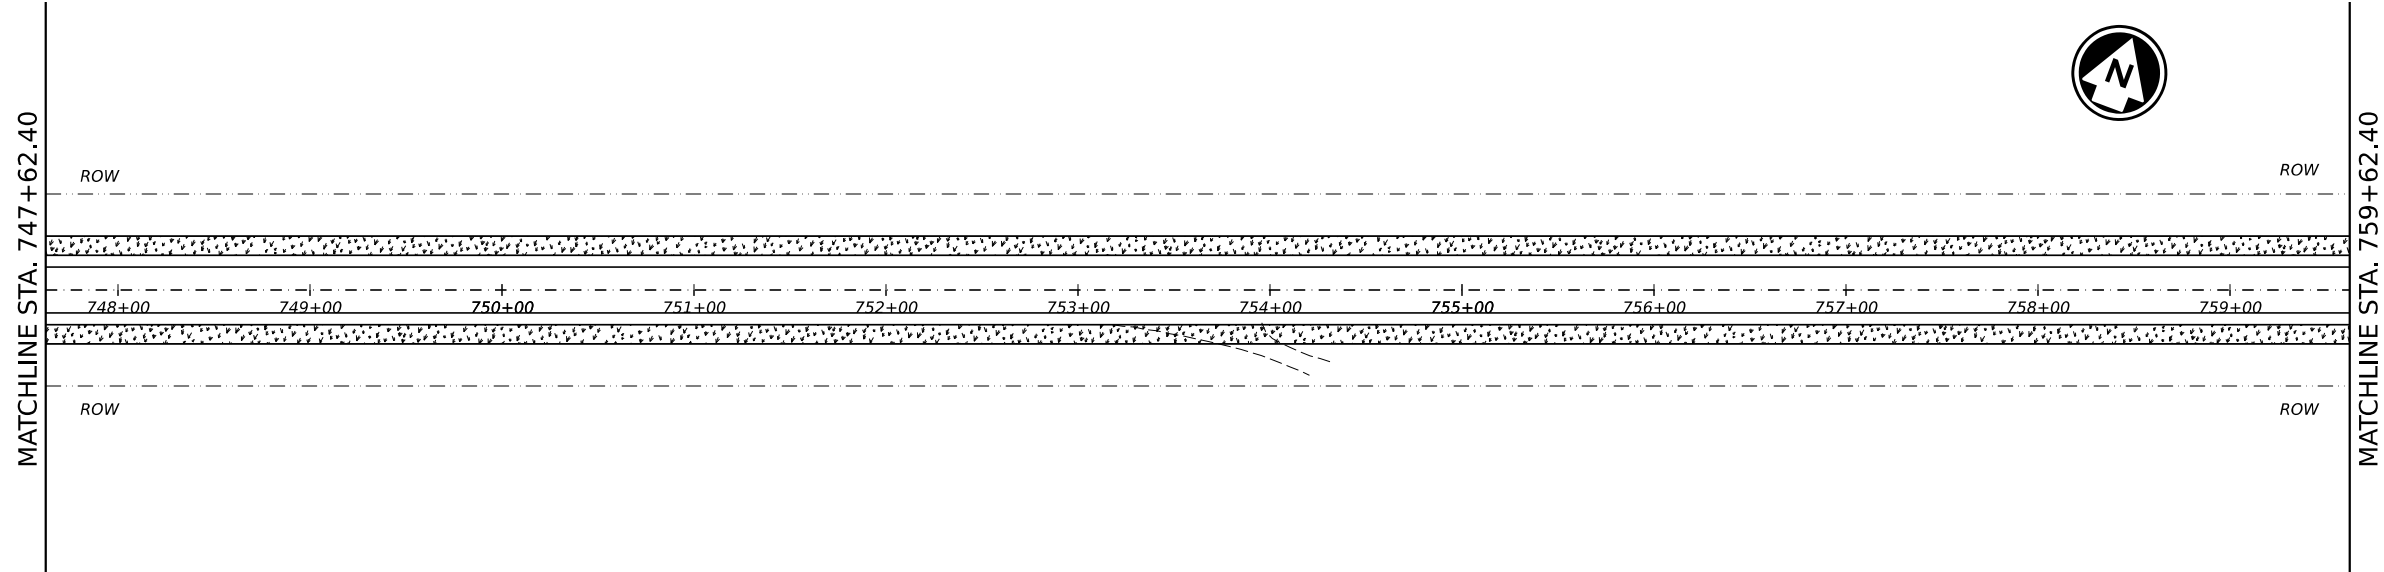

SEEDING AND EMULSION

STATE OF TEXAS
 CHARLES B. STEED
 88647
 LICENSED
 PROFESSIONAL ENGINEER
Charles B. Steed, P.E.
 08/08/2023



SWP3 LAYOUT

SHEET 13 OF 13

CONT	SECT	JOB	HIGHWAY
0105	02	023, ETC.	SH86/SH70
DIST	COUNTY		SHEET NO.
CHS	HALL		84