

# STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

DESIGN SPEED = 50 mph  
 CURRENT A.D.T. (2021) = 66 VPD  
 PROJECTED A.D.T. (2041) = 92 VPD  
 FUNCTIONAL CLASS = RURAL MAJOR COLLECTOR

FED. RD. DIV. NO.	PROJECT NO.		SHEET NO.
6	BR 2024(303)		001
STATE	DISTRICT	COUNTY	
TEXAS	ABL	FISHER	
CONTROL	SECTION	JOB	HIGHWAY NO.
1652	01	015	FM 419

**INDEX OF SHEETS**

SEE SHEET 002

## PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT

PROJECT NO. BR 2024(303)

NET LENGTH OF ROADWAY = 426.67 ft = 0.081 mi  
 NET LENGTH OF BRIDGE = 45.50 ft = 0.009 mi  
 NET LENGTH OF PROJECT = 472.17 ft = 0.089 mi

FINAL PLANS

LETTING DATE: NOVEMBER 2023  
 DATE CONTRACTOR BEGAN WORK: \_\_\_\_\_  
 DATE WORK WAS COMPLETED: \_\_\_\_\_  
 DATE WORK WAS ACCEPTED: \_\_\_\_\_  
 FINAL CONTRACT COST: \$ \_\_\_\_\_  
 CONTRACTOR : \_\_\_\_\_

## FM 419 FISHER COUNTY

LIMITS: FM 419 AT DRAW CREEK  
 FOR THE CONSTRUCTION OF: BRIDGE REPLACEMENT  
 CONSISTING OF: REPLACE BRIDGE AND APPROACHES

CERTIFICATION FOR FINAL PLANS

THIS PROJECT WAS BUILT ACCORDING TO THE PLANS AND SPECIFICATIONS. THESE FINAL PLANS REFLECT THE WORK DONE AND THE QUANTITIES SHOWN THEREON AND ON THE FINAL ESTIMATE ARE FINAL QUANTITIES.


AREA ENGINEER \_\_\_\_\_ DATE \_\_\_\_\_

THE DISTRICT TRAFFIC SAFETY COMMITTEE HAS REVIEWED THE TRAFFIC CONTROL PLAN FOR THIS PROJECT AND IT IS IN COMPLIANCE WITH CURRENT TRAFFIC CONTROL STANDARDS.


DocuSigned by:  
Michael Wittie, P.E. 8/16/2023  
 COMMITTEE CHAIRMAN DATE

 **Texas Department of Transportation**  
 ©2023 BY TEXAS DEPARTMENT OF TRANSPORTATION;  
 ALL RIGHTS RESERVED


RECOMMENDED FOR LETTING 8/16/2023

DocuSigned by:  
  
 STEWART J. CHAPMAN  
 AREA ENGINEER


SUBMITTED FOR LETTING 8/16/2023

DocuSigned by:  
  
 THAISITHA SILVA, P.E.  
 CONSULTANT PROJECT MANAGER


RECOMMENDED FOR LETTING 8/17/2023


DocuSigned by:  
  
 MICHAEL A. HAITHCOCK, P.E.  
 DIRECTOR OF T P & D

RECOMMENDED FOR LETTING 8/16/2023

DocuSigned by:  
  
 PETER N. RERIANI, P.E.  
 TxDOT PROJECT MANAGER

APPROVED FOR LETTING 8/17/2023

DocuSigned by:  
  
 THOMAS G. ALLBRITTON, P.E.  
 DISTRICT ENGINEER

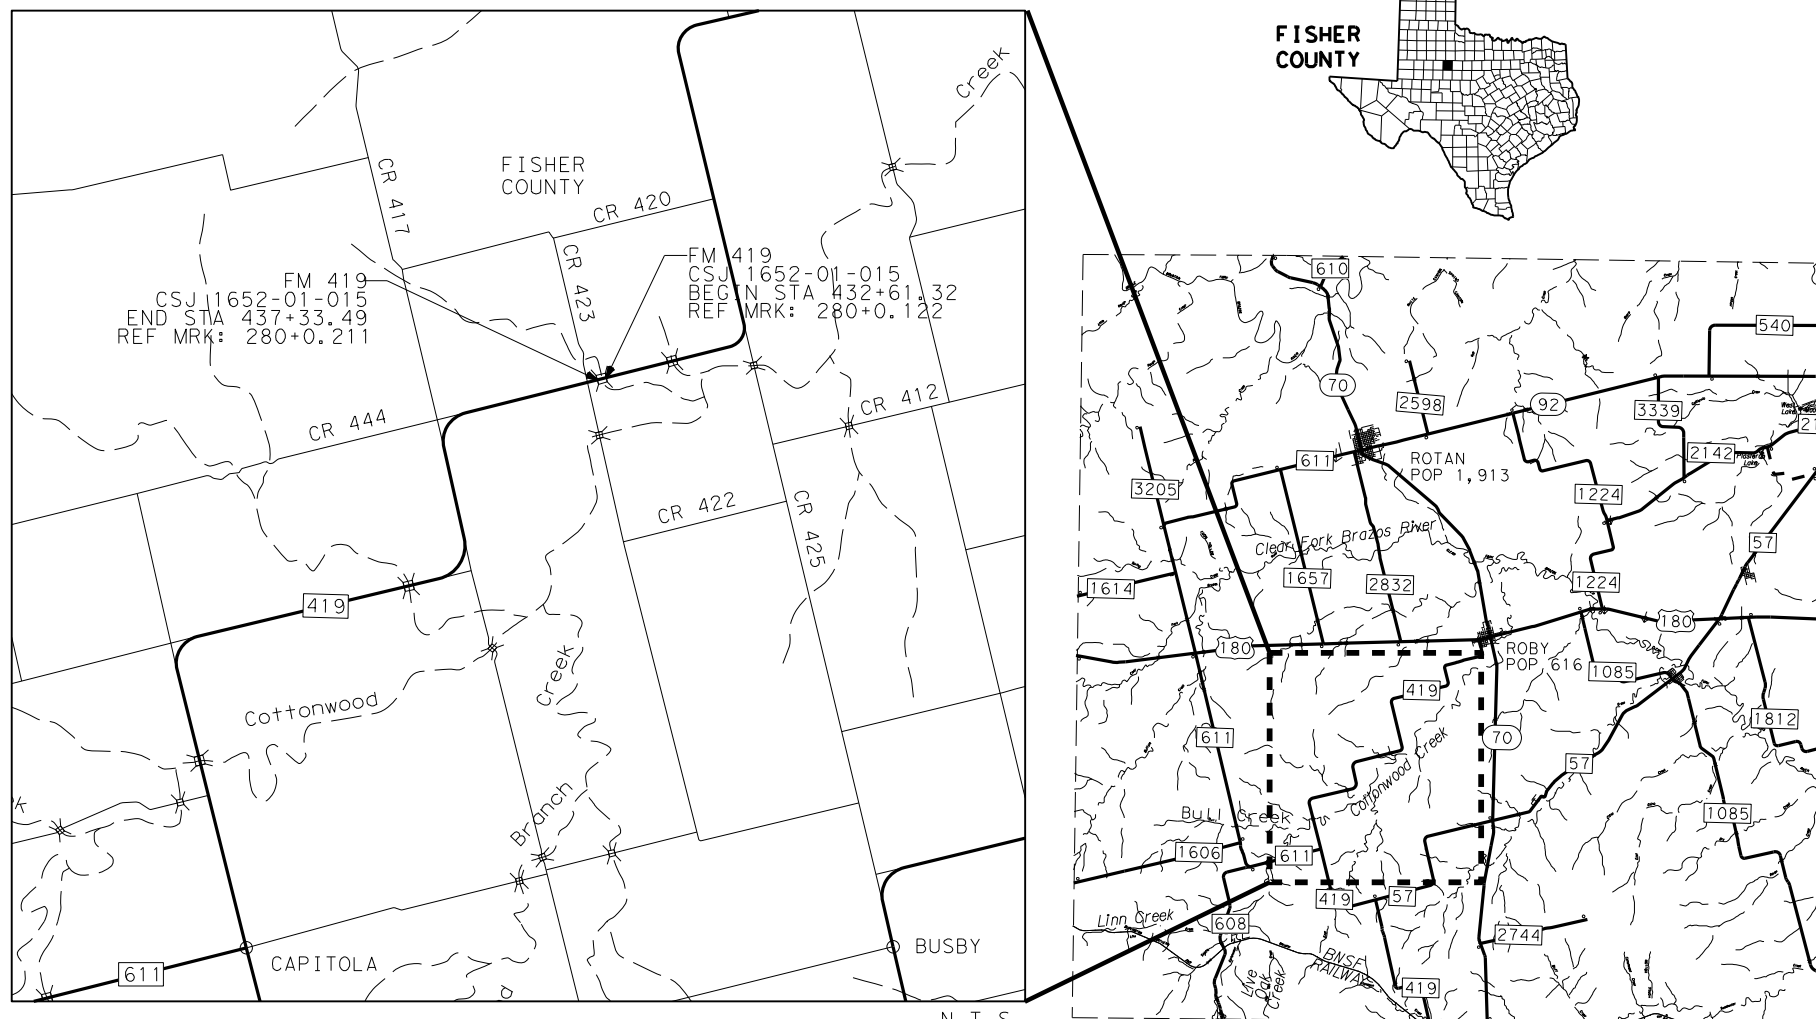

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS FOR ALL FEDERAL-AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, OCTOBER 23, 2023).

EXCEPTIONS: N/A  
 EQUATIONS: N/A  
 RAILROAD CROSSINGS: N/A

DATE: 9/18/2023 11:59:47 AM  
 FILE: c:\users\erfcc\appdata\local\bentley\projectwise\workingdir\wpm-pw-bentley.com\_wpm-pw-01\eco@waltermoore.com\dms45805\FM419\_IND.dgn

**I. GENERAL**

001 TITLE SHEET  
 002 INDEX OF SHEETS  
 003 PROJECT LAYOUT  
 004 TYPICAL SECTIONS  
 005 - 008 GENERAL NOTES  
 009 ESTIMATE & QUANTITY  
 010 QUANTITY SUMMARY

**II. TRAFFIC CONTROL PLAN**

011 SEQUENCE OF CONSTRUCTION  
 012 DETOUR LAYOUT

**III. TRAFFIC CONTROL PLAN STANDARDS**

013 - 024 # BC(1)-21 THRU BC(12)-21  
 025 # WZ(RCD)-13

**IV. ROADWAY**

026 - 027 SURVEY CONTROL POINTS  
 028 HORIZONTAL ALIGNMENT DATA  
 029 REMOVAL LAYOUT  
 030 ROADWAY PLAN AND PROFILE

**V. ROADWAY STANDARDS**

031 # TE(HMAC)-11

**VI. BRIDGE**

032 FM 419 AT DRAW CREEK DRAINAGE AREA MAP  
 033 - 036 FM 419 AT DRAW CREEK HYDRAULIC DATA  
 037 BRIDGE CLASS CULVERT LAYOUT  
 038 SIDD-14  
 039 BCS SHEET

**VII. BRIDGE STANDARDS**

040 # SCP-6  
 041 # SCP-MD  
 042 - 043 # SETB-CD

**VIII. BORING LOGS**

044 - 045 BORING LOGS

**VIII. SIGNING & PAVEMENT MARKINGS STANDARDS**

046 - 049 # D&OM(1)-20 THRU D&OM(4)-20  
 050 - 051 # PM(1)-22 THRU PM(2)-22

**IX. ENVIRONMENTAL**

052 EPIC  
 053 - 054 STORMWATER POLLUTION PREVENTION PLAN (SWP3)  
 055 ENVIRONMENTAL LAYOUT  
 056 SWP3 NOTIFICATION BOARD DETAIL



**X. ENVIRONMENTAL STANDARDS**

057 # EC(1)-16  
 058 # EC(2)-16  
 059 - 061 # EC(9)-16



THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ON THIS SHEET WITH A "\*" HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

THUSITHA SILVA, P.E. 09/18/2023  
 NAME DATE


			
 Walter P. Moore and Associates, Inc. 1301 McKinney, Suite 1100 Houston, Texas 77010 Texas Firm Registration No. 1856			
<h2>INDEX OF SHEETS</h2>			
SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		002
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD#
1652	01	015	FM 419

BEGIN EXIST BRIDGE CLASS CULVERT  
 EXIST 4-7' X6' X29' RCB  
 EXIST NBI#: 08-077-0-1652-01-002  
 STA 434+82.65



BEGIN PROPOSED BRIDGE CLASS CULVERT  
 PROP 6-6' X3' X36' RCB WITH SET (TYI) (4:1) (C)  
 PROPOSED NBI#: 08-077-0-1652-01-005  
 STA 434+74.66


END EXIST BRIDGE CLASS CULVERT  
 EXIST 4-7' X6' X29' RCB  
 EXIST NBI#: 08-077-0-1652-01-002  
 STA 435+12.51

END PROPOSED BRIDGE CLASS CULVERT  
 PROP 6-6' X3' X36' RCB WITH SET (TYI) (4:1) (C)  
 PROPOSED NBI#: 08-077-0-1652-01-005  
 STA 435+20.16

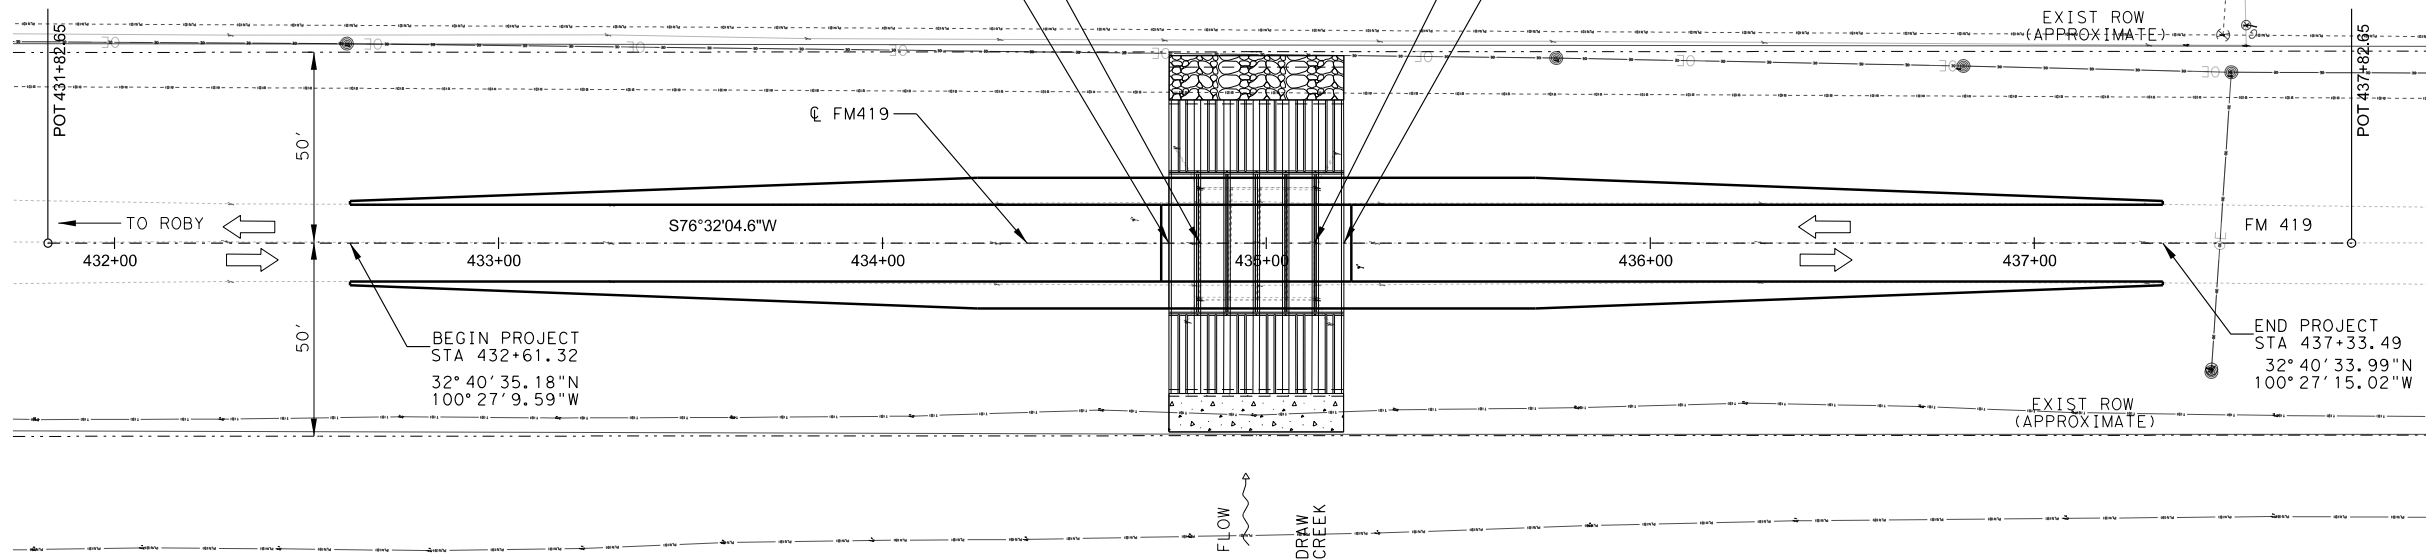


LEGEND

-  STONE RIPRAP
-  CONCRETE RIPRAP



NO.	DATE	REVISION	APPROVED

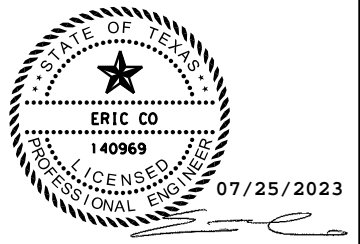


**walter p moore**  
 Walter P. Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

**FM 419  
 PROJECT LAYOUT**


SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.	
6	SEE TITLE SHEET	003	
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

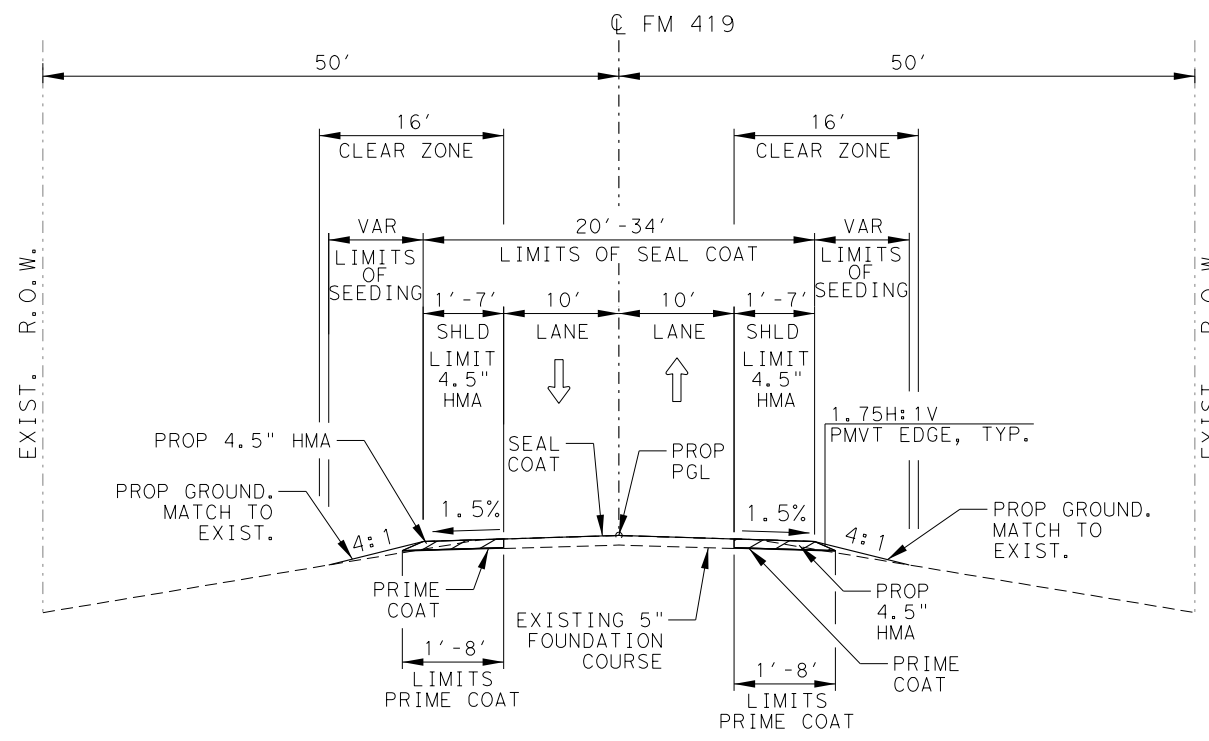


PROPOSED TYPICAL SECTION

FROM STA 432+61.32 TO STA 434+72.66  
 FROM STA 435+20.16 TO STA 437+33.49  
 SHOULDER TRANSITION FROM 20' TO 34': STA 432+61.32 TO STA 434+24.66  
 SHOULDER TRANSITION FROM 34' TO 20': STA 435+70.16 TO STA 437+33.49  
 N. T. S.

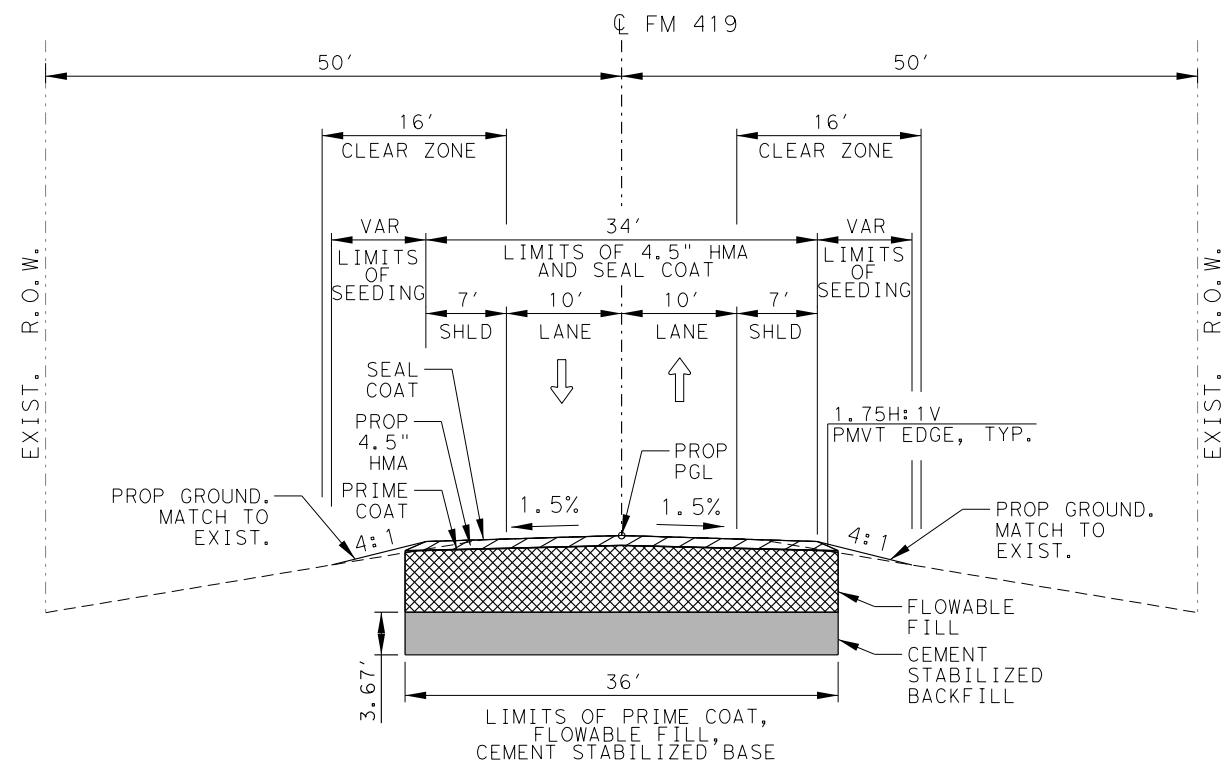


PROPOSED TYPICAL SECTION

FROM STA 434+72.66 TO STA 434+74.66  
 FROM STA 435+20.16 TO STA 435+20.16  
 N. T. S.

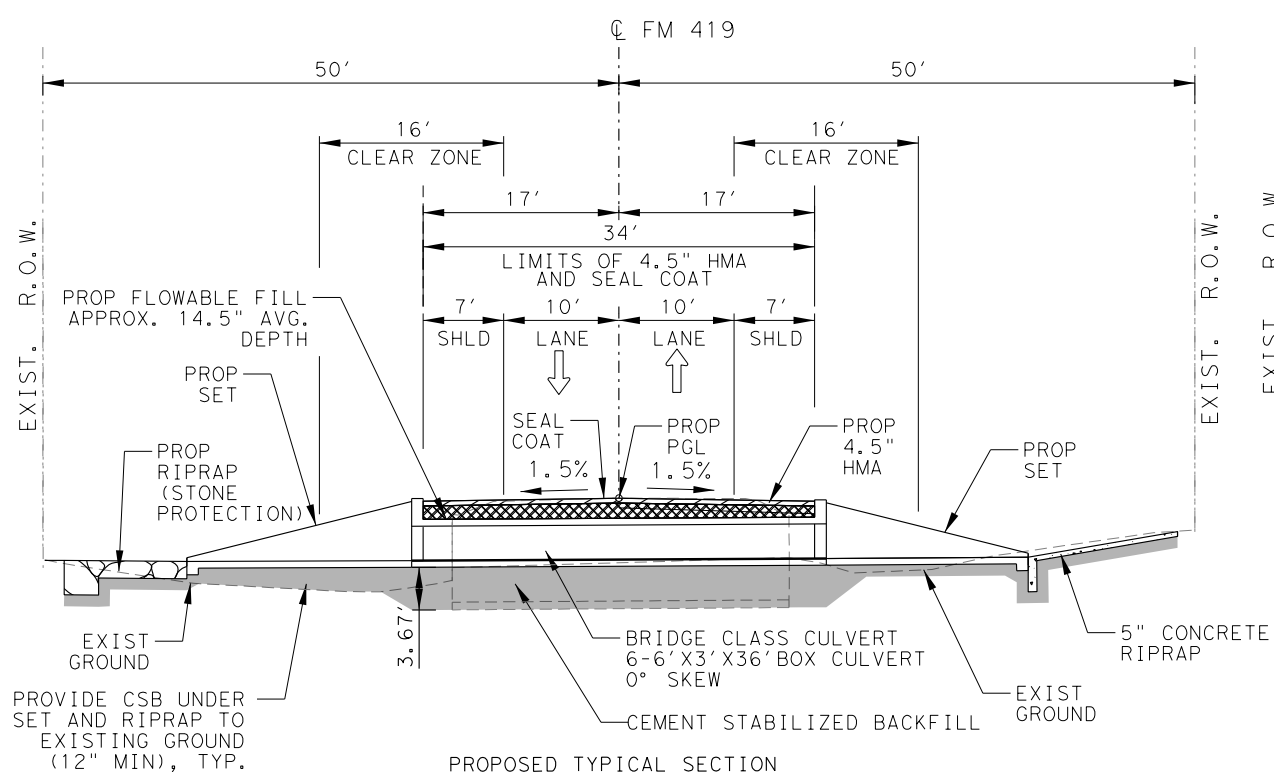

PROPOSED TYPICAL SECTION

FROM STA 434+74.66 TO STA 435+20.16  
 N. T. S.

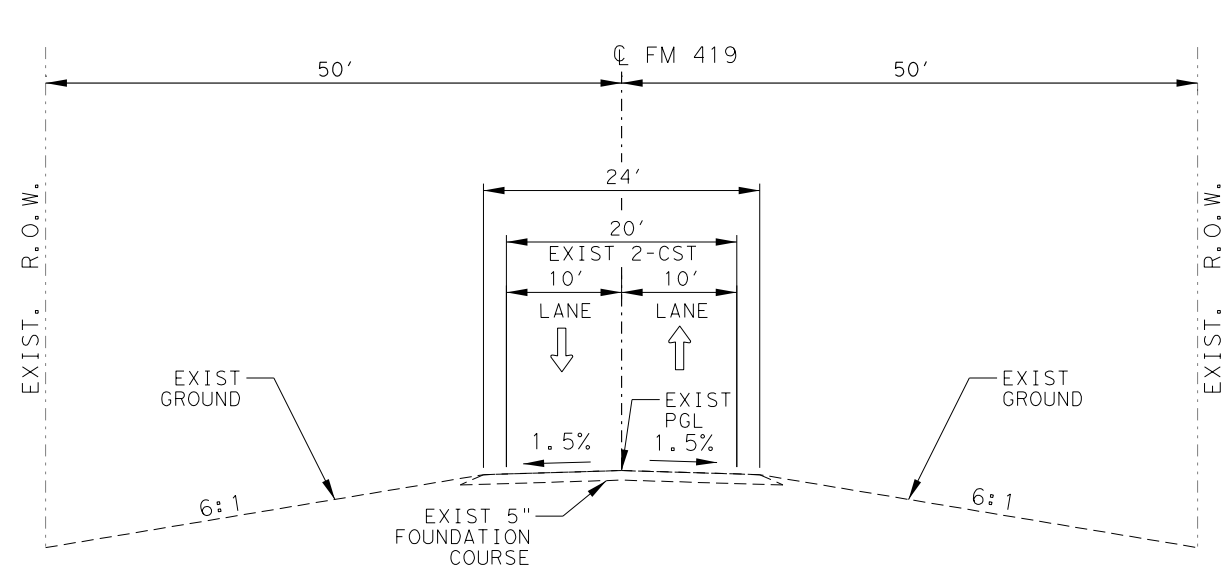

EXISTING TYPICAL SECTION

FROM STA 432+61.32 TO STA 437+33.49  
 N. T. S.

DATE: 9/18/2023 11:17:30 AM  
 FILE: c:\users\salvador\dms45805\FM419\_TYP01.dgn

NO.	DATE	REVISION	APPROVED

09/18/2023

© 2023

Walter P. Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

FM 419

## TYPICAL SECTIONS

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	SEE TITLE SHEET	004

STATE	DIST.	COUNTY
TX	ABL	FISHER

CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419



CCSJ: 1652-01-015  
County: Fisher  
Highway: FM 419

**ABILENE DISTRICT GENERAL NOTES  
2014 SPECIFICATIONS**

**General**

Contractor questions on this project are to be addressed to the following individual(s):

Stewart Chapman, P.E. / Phone: 325-573-0143 / [Stewart.Chapman@txdot.gov](mailto:Stewart.Chapman@txdot.gov)  
Maxie Allen, P.E. / Phone: 325-573-0142 / [Maxie.Allen@txdot.gov](mailto:Maxie.Allen@txdot.gov)  
Jose Cabrera, P.E. / Phone: 325-573-0143 / [Jose.Cabrera@txdot.gov](mailto:Jose.Cabrera@txdot.gov)  
(Snyder Area Office)

Contractor questions will be accepted through email, phone, and in person by the above individuals.

For Q&A's on Proposals navigate to <https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>  
Use the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

All relevant project documentation including contract time, cross sections, etc will be posted on the districts FTP website. <https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

Failure to make necessary corrections to SW3P based on SW3P inspections will be cause for withholding the monthly estimate until such corrections have been made.

Failure to make necessary corrections to traffic control items based on barricade inspections will be cause for withholding the monthly estimate until such corrections have been made.

Cut neat, straight lines with vertical faces along pavement edges or along joints between existing asphalt or concrete pavement and new pavement perpendicular or parallel to the direction of traffic by methods described in applicable bid items, or as directed. Provide clean edges or joints without jagged appearance or chunks broken out. This work is considered subsidiary to various bid items.

**Environmental  
Endangered and Protected Species**

1. Migratory Bird Treaty Act (MBTA) - Establishment of a Federal prohibition, unless permitted by regulations, to "pursue, hunt, take, capture, kill, attempt to take, capture or kill, possess, offer for sale, sell, offer to purchase, purchase, deliver for shipment, ship, cause to be shipped, deliver for transportation, transport, cause to be transported, carry, or cause to be carried by any means whatever, receive for shipment, transportation or carriage, or export, at any time, or in any manner, any migratory bird, included in the

General Notes

Sheet A

CCSJ: 1652-01-015  
County: Fisher  
Highway: FM 419

terms of this Convention . . . for the protection of migratory birds . . . or any part, nest, or egg of any such bird." (16 U.S.C. 703)

**Best Management Practices**

1. Comply with the SW3P and associated sheets.
2. Migratory Birds:
  - a. Bird nesting season is typically 15Feb through 15Sep annually.
  - b. The Contractor will avoid disturbing, destroying, removing, or relocating migratory birds and active nests found in trees, culverts, bridges, on the ground, or anywhere they are encountered.
  - c. Perform all tree trimming and other vegetation clearing activities during the non-breeding season (typically 15Sep-15Feb annually). Perform any inactive nest removal and bird exclusion methods to prevent birds from establishing nests. Phasing of work during construction may be necessary to stay in compliance.
  - d. When active nests are unexpectedly encountered on-site during construction, the Contractor will stop work and immediately notify the Engineer. Take measures to avoid disturbance of these birds, their occupied nest, eggs, and/or young, in accordance with the Migratory Bird Treaty Act, Texas Parks and Wildlife Code, and TxDOT policy.
  - e. The Engineer will notify the Contractor when work may resume.
  - f. The Contractor should be prepared to prevent migratory birds from building nests by utilizing nest prevention methods, such as bird-deterrent netting and bird-repelling sprays and/or gels, between 15Feb and 15Sep. The Contractor can discuss other preventative measures with the Engineer and/or District Environmental Staff.
3. Other Best Management Practices for State Protected Species \*
  - a. If Black Tailed Prairie Dog (BTPD) burrows or pocket gopher mounds are found near or within the project area, place barrier fencing to discourage the individual animals of moving into or through the construction area.
  - b. While seeding or revegetating, if BTPD or pocket gopher mounds are discovered near or within the planned area, a vegetative barrier should be planted to discourage the dispersal of the species within the TxDOT ROW.
  - c. If any animals are within the project area, avoid harming when encountered. Let them leave the area without harassment. Avoid any unnecessary impacts to dens or burrows.
  - d. Avoid or minimize disturbing or removing downed trees, rotting stumps, and leaf litter where feasible.
  - e. Examine heavy equipment stored on site before use, particularly after rain events when reptile and amphibian movements occur more often, to ensure use will not harm individuals that might be seeking temporary refuge.

General Notes

Sheet B

7/26/2023 9:04:20 PM c:\user\server\cc\appdata\local\project\work\working\wpm-dw\_bent\ex.com\_wpm-dw-01\eco\w\terpmoore.com\dms45805\FM419\_GN\_dgn

CONT	SECT	JOB	HIGHWAY
1652	01	015	FM 419
DIST	COUNTY		SHEET NO.
ABL	FISHER		005



7/26/2023 9:04:24 PM c:\user\s\er\cc\appdata\local\temp\project\se\work\ing\d\wpm-pw-bent\ex.com\dms\45805\FM419\_GN.dgn

CCSJ: 1652-01-015  
County: Fisher  
Highway: FM 419

- f. For open trenches and excavated pits, install escape ramps at an angle of less than 45 degrees (1:1) in areas left uncovered. Visually inspect excavation areas for the presence of wildlife prior to backfilling.
- g. Rubbish found near bridges on TxDOT ROW should be removed and disposed of properly to minimize the risk of pollution. Rubbish does not include brush piles or snags.
- h. If Texas tortoises (*Gopherus berlandieri*) or box turtles (*Terrepenes* spp.) are present in a project area, they should be removed from the area and relocated between 100 and 200 meters from the project area.
- i. Minimize the amount of vegetation cleared. Removal of native vegetation, particularly mature native trees and shrubs should be avoided.

**Item 5, "Control of Work"**

Use Method C for construction surveying.

All known utilities are identified in the plans, including the crossing of power lines. Use this information to identify potential issues with power poles and power lines prior to bidding.

Make necessary arrangements with utility owners regarding temporary protections such as bracing power poles, and de-energizing power lines. The Department will not reimburse the cost of such temporary protections to the Contractor, unless the Engineer determines that inadequate information was available at the time the project was bid. **"Call Before You Dig" "Call 811"**

Provide notification to the District Traffic Engineering Section by telephone at 325-676-6991 and by email at [ABL\\_TrafficFix@txdot.gov](mailto:ABL_TrafficFix@txdot.gov) when planning drilling or excavation work in areas where existing TxDOT underground utilities exist. Visual evidence of TxDOT underground utilities in the area include illumination poles, ground boxes, flashing beacons, traffic signals, etc. This notification must be provided 72 hours in advance of performing the work.

Excavation areas must be staked prior to the notification so that the underground utilities can be located in relationship to the proposed work. Preserve and document the marked utility locations to prevent unnecessary secondary notifications. Notify the Engineer of conflicts between proposed work and underground utilities.

"When a precast or cast-in-place concrete element is included in the plans, a precast concrete alternate may be submitted in accordance with "Standard Operating Procedure for Alternate Precast Proposal Submission" found online at <https://www.txdot.gov/inside-txdot/forms-publications/consultants-contractors/publications/bridge.html#design>. Acceptance or denial of an alternate is at the sole discretion of the Engineer. Impacts to the project schedule and any additional costs resulting from the use of alternates are the sole responsibility of the Contractor."

General Notes

Sheet C

CCSJ: 1652-01-015  
County: Fisher  
Highway: FM 419

**Item 6, "Control of Materials"**

To comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, the contractor must submit a notarized original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product.

Refer to the Buy America Material Classification Sheet for clarification on material categorization.

The Buy America Material Classification Sheet is located at the below link.

<https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html> for clarification on material categorization.

**Item 7, "Legal Relations and Responsibilities"**

The total area disturbed for this project is **0.3** acre. The disturbed area in this project, all project locations in the Contract, and the Contractor project specific locations (PSLs), within 1 mile of the project limits, for the Contract will further establish the authorization requirements for storm water discharges. The Department will obtain an authorization to discharge storm water from the Texas Commission on Environmental Quality (TCEQ) for the construction activities shown on the plans. The Contractor is to obtain required authorization from the TCEQ for Contractor PSLs for construction support activities on or off the ROW. When the total area disturbed in the Contract and PSLs within 1 mile of the project limits exceeds 5 acres, provide a copy of the Contractor NOI for PSLs on the ROW to the Engineer and to the government that operates a separate storm sewer system.

Provide one SW3P Notification Board for this project. Notification Boards are to be placed at locations within the right-of-way but outside the clear zone as directed by the Engineer. Consider this work to be subsidiary to the various bid items of the contract.

No significant traffic generator events identified.

**Hard hats are required at all times during construction when construction personnel are in TxDOT Right-of-Way.**

Patrol vehicles must be clearly marked to correspond with the officer's agency and equipped with appropriate lights to identify them as law enforcement. For patrol vehicles not owned by a law enforcement agency, markings will be retroreflective and legible from 100 ft. from both sides and the rear of the vehicle. Lights will be high intensity and visible from all angles.

General Notes

Sheet D

CONT	SECT	JOB	HIGHWAY
1652	01	015	FM 419
DIST	COUNTY		SHEET NO.
ABL	FISHER		006

7/26/2023 9:04:28 PM c:\user\server\cc\appdata\local\temp\project\se\working\wpm-dw-bent\ley\ngdi\wpm-dw-bent\ley\com\_wpm-dw-01\eco@walterpmoore.com\dms45805\FM419\_GN.dgn

**CCSJ:** 1652-01-015  
**County:** Fisher  
**Highway:** FM 419

**Item 8 “Prosecution and Progress”**

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process and/or execute all contracts at the same time.

The Contractor is hereby authorized to begin work prior to the expiration of the number of calendar days provided in the Special Provision to Item 8, Article 8.1. Notify the Engineer in writing of the date to begin work. Time charges will commence when work begins or on the expiration of the number of calendar days provided, whichever occurs first.

Coordinate and update the work schedule with the project inspector daily. Give a minimum of 24 hours of notice to project inspector if work requiring inspection or testing is to be performed. Failure to do so may cause that work to be delayed or postponed if TxDOT personnel are not available. Work performed without suitable inspection, as determined by the Engineer, may be ordered removed and replaced at Contractor’s expense.

The Additional Project Specific Liquidated Damages are \$2762.00 per day.

**Item 9, “Measurement and Payment”**

The progress payment period shall end on the 25<sup>th</sup> of each month, unless directed by the Area Office Engineer. Material on Hand (MOH) is due two business days before estimate cut off.

**Item 164, “Seeding for Erosion Control”**

Quantities shown are approximate; limits of the permanent seeding will be determined during construction.

**Item 168, “Vegetative Watering”**

Water rate for this project shall be ¼” of water per acre every two weeks for a 3-month period.

**Item 216, “Proof Rolling”**

Perform proof rolling only as directed. Payment for this item will be made only when proof rolling is performed as directed.

**Item 316, “Surface Treatments”**

ASPH (AC-20-5TR) @ .40 GAL/SY  
AGGR (TY-PB GR-3 SAC –B) – 1 CY/115 SY

The rates shown are for estimating purposes and the engineer can dictate higher or lower rates based on roadway conditions.

In addition to other asphalt distributor requirements, the asphalt distributor will be capable of providing a transversely varied asphalt rate. The Contractor will demonstrate that the distributor can apply an asphalt rate outside of the wheel path locations between 22 and 32 percent higher than the asphalt rate being applied in the wheel paths. The Contractor’s calibration of the

General Notes

Sheet E

**CCSJ:** 1652-01-015  
**County:** Fisher  
**Highway:** FM 419

distributor will include verification of this capability and a description of the spray bar(s) and nozzles to be used. The percentage difference in the asphalt rate provided by each tested spray bar and nozzle arrangement will be provided to the Engineer. The Engineer will select the pavements where the transversely varied asphalt rates are to be provided.

Unless authorized in writing by the Engineer, the open season for the application of asphalt is May 1 to August 31.

Furnish a minimum of six (6) light or four (4) medium pneumatic-tire rollers in accordance with item 210, “Rolling”.

Furnish and use variable rate nozzles when directed by the Engineer. The asphalt placement rate outside the wheel path will be 20% to 30% greater than the rate inside the wheel path unless otherwise approved.

After each roadway is completed, all paper joints shall be removed when each roadway is completed or as directed by the Engineer.

Remove excess aggregate from the curb and gutter sections, bridge rail, intersections, and other areas as directed. After final rolling, remove any loose aggregate from the paved surface. This work is subsidiary to the various bid items.

**Item 401, “Flowable Backfill”**

Provide non-excavatable material.

**Item 421, “Hydraulic Cement Concrete”**

Class C fly ash and Type I cement will not be allowed for any mix unless approved by the Engineer.

As a minimum, curing facility includes concrete curing tank, heater and a concrete recording thermometer. Provide a recorder with the capability to chart temperatures for 24 hours, 7 days and 30 day periods of time.

Air Entrainment requirements are waived with exception to bridge deck concrete, and rails, top slabs of direct traffic culverts and approach slabs.

**Item 502, “Barricades, Signs and Traffic Handling”**

Provide the Engineer with written notification seven (7) days in advance of major traffic changes. A major traffic change is defined as the temporary (greater than one day) or permanent relocation of traffic lanes typically in an urban setting. The notice will, at a minimum, include the expected date, time and scope of the traffic change. The Department will utilize the information provided to inform the traveling public of the changes. Failure to provide advance notice, or to provide accurate information, will result in delaying the work until such time that the public has been notified.

General Notes

Sheet F



GENERAL NOTES

CONT	SECT	JOB	HIGHWAY
1652	01	015	FM 419
DIST	COUNTY		SHEET NO.
ABL	FISHER		007



7/26/2023 9:04:32 PM c:\user\server\cc\appdata\local\temp\project\se\working\ngdi\wpm-dw\ben\le\com\_wpm-dw-01\eco@wal\ter\pmoore.com\dms45805\FM419\_GN.dgn

**CCSJ:** 1652-01-015  
**County:** Fisher  
**Highway:** FM 419

Additional signs, barricades and traffic handling may be necessary to complete the work shown herein and will be provided by the contractor as required and will be considered subsidiary to this item.

All safety appurtenances such as signs, delineators, object markers and route markers will be in place prior to opening each phase of the construction to traffic, unless otherwise directed.

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

The Contractor's person responsible for TCP compliance must be available by local telephone and have a response time within 45 minutes.

Equip all work vehicles within 30 feet of the traveled way with a functioning amber strobe light or rotating beacon visible from all directions.

Repair barricades within the timeline shown on the barricade inspection report. Failure to comply will cease all work until barricades are repaired to the satisfaction of the Department. Replace all damaged traffic control devices immediately. Remove any damaged traffic control devices from the project within 24 hours.

Conflicting guide signs shall be covered as approved by the Engineer. This work shall be subsidiary to Item 502.

**Item 658, "Delineator and Object Marker Assemblies"**  
Delineators and object marker assemblies will use winged channel posts. The winged channel posts will be 1.12 lb/ft and 6.5 ft in length.

**Item 666, "Retro reflectorized Pavement Markings"**  
All longitudinal pavement markings (including profile pavement markings) must meet minimum retro reflectivity requirements.

Establish a true and correct alignment with a method approved by the Engineer. This work will be considered subsidiary.

Contractor is responsible for re-establishing location and alignment for new pavement markings matching pavement marking alignment prior to construction activities. This work will be considered subsidiary.

General Notes

Sheet G

**CCSJ:** 1652-01-015  
**County:** Fisher  
**Highway:** FM 419

**Item 672, "Raised Pavement Markers"**  
Provide a complete system of raised pavement markers at locations indicated on the plans and as directed by the engineer. The plans are intended to show typical conditions, which can be extended to similar conditions throughout this project as approved or directed.

Bituminous adhesive shall be used on this project.

**Item 3076, "Dense-Graded Hot-Mix Asphalt"**  
The Engineer reserves the right to test all sources even if the source is listed in the Bituminous Source Rated Quality Catalog.

Provide the testing lab samples to calibrate the ignition oven no later than five (5) working days prior to mix design verification.

Paving operations will not be allowed to begin until TxDOT has tested and obtained passing Hamburg results on the trial batch.

A maximum of 0.50% anti-stripping agent will be allowed for each specified mix type.

Dilution of tack coat is not allowed.

Do not exceed a laydown width of 16' per pass.

Substitute Binders will not be allowed unless RAP is used in the production of the mixture. RAS will not be allowed in surface mixes.

A warm mix additive will be required for hotmix hauls over 50 miles.

Unless otherwise directed by the engineer, a warm mix additive will be required when paving during November 1<sup>st</sup> through March 15<sup>th</sup>.

The use of a tapered longitudinal joint will be required for pavement thicker than 2 inches. Provide PG 64-22 tack coat at a rate of 0.10 gal/sy.

The Contractor will be required to tack 100% of the surfaces with uniform coverage prior to the subsequent lift. The type and grade of tack will be approved by the Engineer prior to use.

Tack all vertical joints unless otherwise directed.

General Notes

Sheet H

CONT	SECT	JOB	HIGHWAY
1652	01	015	FM 419
DIST	COUNTY		SHEET NO.
ABL	FISHER		008



SUMMARY OF BRIDGE ITEMS

CSJ	PLAN & PROFILE SHEET	BRIDGE NBI #		DESIGN		BRIDGE LOCATION	STATION		LENGTH FT	CLEAR RDWY WIDTH FT	LOADING	400 6002	400 6005	401 6001	432 6002	432 6031	462 6010	467 6219
		EXISTING	PROPOSED	EXISTING	PROPOSED		BEGIN	END				STRUCT EXCAV (BOX) CY	CEM STABIL BKFL CY	FLOWABLE BACKFILL CY	RIPRAP (CONC) (5 IN) CY	RIPRAP (STONE PROTECTION) (12 IN) CY	CONC BOX CULV (6 FT X 3 FT) LF	SET (TY 1) (S= 6 FT) (HW= 5 FT) (4:1) (C) EA
		PROJECT TOTALS																
1652-01-015	37	80770165201002	080770165201005	4 - 7' X6' X29.3' CONCRETE BOX CULVERT	6 - 6' X3' X36' CONCRETE BOX CULVERT	FM 419 AT DRAW CREEK	434+74.66	435+20.16	45.5	34	HL 93	232	381	99	10	37	216	12
PROJECT TOTALS												232	381	99	10	37	216	12

SUMMARY OF ASPHALT SURFACE AREAS

STATION	TO STATION	TO STATION	TO STATION	LENGTH FT	BEGIN WIDTH FT	END WIDTH FT	AREA SY	310 6005	316 6017	316 6222	3076 6001	3076 6001
								PRIME COAT (AE-P) 0.2 GAL/SY	ASPH (AC-20-5TR) 0.40 GAL/SY	AGGR (TY-PB GR-3 SAC-B) 1 CY/115 SY	D-GR HMA TY-B PG64-22 496 LB/SY	D-GR HMA TY-B PG64-22 248 LB/SY
								GAL	GAL	CY	TON	TON
TAPERED EDGE												
STATION 432+61.32	TO STATION 434+24.66	TO STATION 434+24.66	TO STATION 434+24.66	163.34	20	34	490		196	4		
STATION 434+24.66	TO STATION 434+72.66	TO STATION 434+72.66	TO STATION 434+72.66	48.00	34	34	181		72	2		
STATION 434+72.66	TO STATION 434+74.66	TO STATION 434+74.66	TO STATION 434+74.66	2.00	34	34	8		3	0		
STATION 434+74.66	TO STATION 435+20.16	TO STATION 435+20.16	TO STATION 435+20.16	45.50	34	34	172		69	1		
STATION 435+20.16	TO STATION 435+22.16	TO STATION 435+22.16	TO STATION 435+22.16	2.00	34	34	8		3	0		
STATION 435+22.16	TO STATION 435+70.16	TO STATION 435+70.16	TO STATION 435+70.16	48.00	34	34	181		72	2		
STATION 435+70.16	TO STATION 437+33.49	TO STATION 437+33.49	TO STATION 437+33.49	163.33	34	20	490		196	4		
TOTAL:									611	13		
STATION 432+61.32	TO STATION 434+24.66	TO STATION 434+24.66	TO STATION 434+24.66	163.34	1	14	136	27			34	
STATION 434+24.66	TO STATION 434+72.66	TO STATION 434+72.66	TO STATION 434+72.66	48.00	14	14	75	15			19	
STATION 434+72.66	TO STATION 434+74.66	TO STATION 434+74.66	TO STATION 434+74.66	2.00	34	34	8	2			2	
STATION 434+74.66	TO STATION 435+20.16	TO STATION 435+20.16	TO STATION 435+20.16	45.50	34	34	172	34			43	
STATION 435+20.16	TO STATION 435+22.16	TO STATION 435+22.16	TO STATION 435+22.16	2.00	34	34	8	2			2	
STATION 435+22.16	TO STATION 435+70.16	TO STATION 435+70.16	TO STATION 435+70.16	48.00	14	14	75	15			19	
STATION 435+70.16	TO STATION 437+33.49	TO STATION 437+33.49	TO STATION 437+33.49	163.33	14	1	136	27			34	
STATION 432+61.32	TO STATION 437+33.49	TO STATION 437+33.49	TO STATION 437+33.49	472.17	1.31	1.31	8	2				1
TOTAL:								124			153	1

SUMMARY OF REMOVAL ITEMS

FM 419 AT DRAW CREEK	105 6023	403 6001	496 6005	496 6008
	REMOVING STAB BASE AND ASPH PAV (5")	TEMPORARY SPL SHORING	REMOV STR (WINGWALL)	REMOV STR (BOX CULVERT)
	SY	SF	EA	LF
STATION 432+61.32 TO STATION 437+33.49	108	540	2	116
PROJECT TOTALS	108	540	2	116

SUMMARY OF ROADWAY ITEMS


FM 419 AT DRAW CREEK	110 6001	132 6004	216 6001
	EXCAVATION (ROADWAY)	EMBANKMENT (FINAL) (DENS CONT) (TY B)	PROOF ROLLING
	CY	CY	HR
STATION 432+61.32 TO STATION 437+33.49	50	50	2
PROJECT TOTALS	50	50	2

SUMMARY OF PAVEMENT MARKING ITEMS

FM 419 AT DRAW CREEK	658 6047	666 6174	666 6208	672 6009
	INSTL OM ASSM (OM-2Y) (WC) GND	REFL PAV MRK TY II (W) 6" (SLD)	REFL PAV MRK TY II (Y) 6" (BRK)	REFL PAV MRKR TY II-A-A
	EA	LF	LF	EA
STATION 432+52.60 TO STATION 437+32.60	4	960	120	6
PROJECT TOTALS	4	960	120	6

SUMMARY OF EROSION CONTROL ITEMS

FM 419 AT DRAW CREEK	164 6023	168 6001	506 6003	506 6011	506 6040	506 6043
	CELL FBR MLCH SEED (PERM) (RURAL) (CLAY)	VEGETATIVE WATERING	ROCK FILTER DAMS (INSTALL) (TY 3)	ROCK FILTER DAMS (REMOVE)	BIODEG EROSN CONT LOGS (INSTL) (8")	BIODEG EROSN CONT LOGS (REMOVE)
	SY	MG	LF	LF	LF	LF
STATION 432+52.60 TO STATION 437+32.60	485	25	168	168	80	80
PROJECT TOTALS	485	25	168	168	80	80



© 2023  
Walter P. Moore and Associates, Inc.  
1301 McKinney, Suite 1100  
Houston, Texas 77010  
Texas Firm Registration No. 1856

### QUANTITY SUMMARY




SHEET 1 OF 1		
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	SEE TITLE SHEET	010
STATE	DIST.	COUNTY
TX	ABL	FISHER
CONT.	SECT.	JOB
1652	01	015
STREET/ROAD:		
FM 419		

DATE: 7/31/2023 10:17:53 AM  
 FILE: c:\users\erfc\appdata\local\bentley\projectwise\workingdir\wpm-pw-bentley.com\_wpm-pw-01\eco@waltermoore.com\dms45805\FM419\_SUM.dgn

DATE: 7/31/2023 10:33:01 AM  
 FILE: c:\users\erfcc\appdata\local\bentley\projectwise\workingdir\wpm-pw-bentley.com\_wpm-pw-01\eco@waltermoore.com\dms45806\FM419\_TCP01.dgn


**FM 419 SEQUENCE OF CONSTRUCTION:**

1. INSTALL PROJECT SIGNS, TCP DEVICES, AND SWP3 BMPS.
2. REMOVE PAVEMENT, PERFORM EXCAVATION & INSTALL TEMPORARY SPECIAL SHORING, AND REMOVE EXISTING CULVERT & WINGWALLS.
3. GRADE CHANNEL SURFACE AND INSTALL CEMENT STABILIZED BACKFILL.
4. INSTALL PROPOSED CULVERT AND SETS.
5. INSTALL STONE AND CONCRETE RIPRAP.
6. GRADE APPROACHES.
7. REMOVE SHORING AND INSTALL PROPOSED FLOWABLE FILL, PRIME COAT, PAVEMENT, SEAL COAT, AND PAVEMENT MARKINGS.
8. GRADE SIDE SLOPES AND INSTALL PERMANENT SEEDING/WATER/FERTILIZER.
9. REMOVE PROJECT SIGNS, TCP DEVICES, AND TEMPORARY SW3P BMPS.

NO.	DATE	REVISION	APPROVED
			
			
			
<p><b>FM 419</b>  <b>SEQUENCE OF</b>  <b>CONSTRUCTION</b></p>			
SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		011
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419



DATE: 7/25/2023 4:39:51 PM  
 FILE: c:\users\salvador\dms45806\FM419\_TCF02.dgn

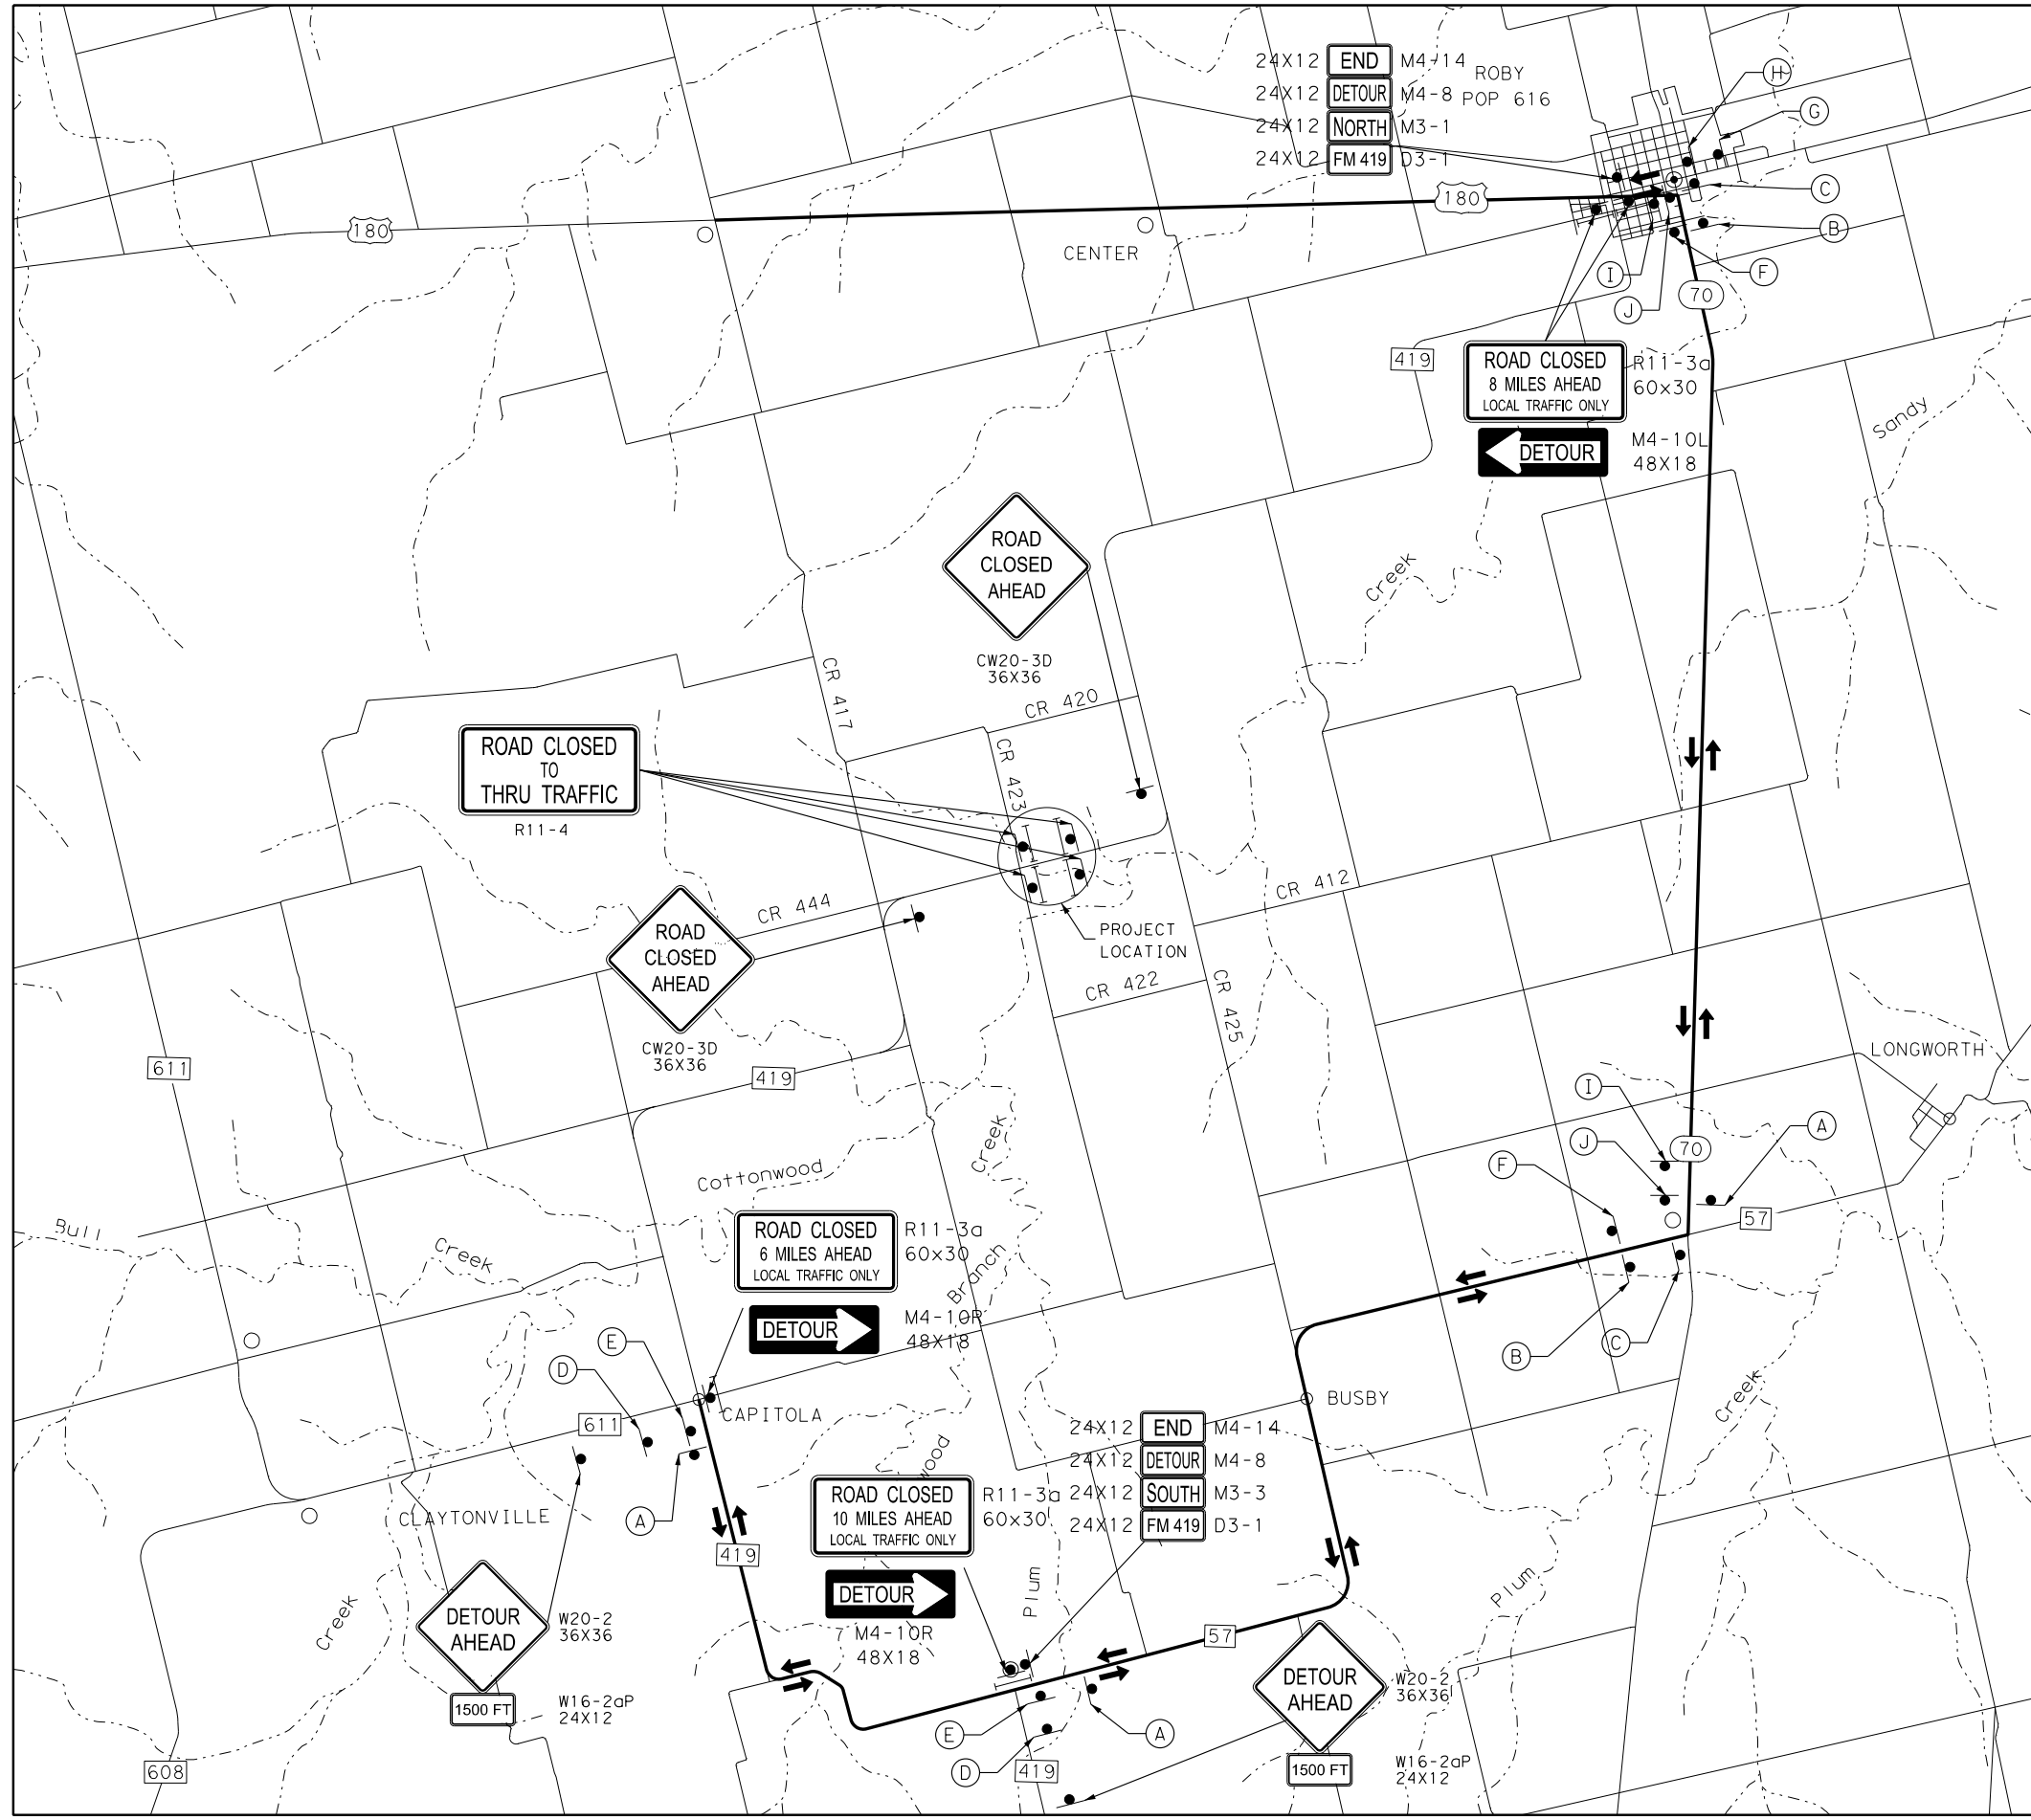

LEGEND

- SIGN
  - TYPE III BARRICADE
- |     |                   |     |                   |
|-----|-------------------|-----|-------------------|
| (A) | DETOUR M4-8 24X12 | (F) | DETOUR M4-8 24X12 |
|     | NORTH M3-1 24X12  |     | SOUTH M3-1 24X12  |
|     | FM 419 D3-1 24X12 |     | FM 419 D3-1 24X12 |
| (B) | DETOUR M4-8 24X12 | (G) | DETOUR M4-8 24X12 |
|     | NORTH M3-3 24X12  |     | SOUTH M3-3 24X12  |
|     | FM 419 D3-1 24X12 |     | FM 419 D3-1 24X12 |
|     | ← M5-1L 21x15     |     | ← M5-1L 21x15     |
| (C) | DETOUR M4-8 24X12 | (H) | DETOUR M4-8 24X12 |
|     | NORTH M3-1 24X12  |     | SOUTH M3-1 24X12  |
|     | FM 419 D3-1 24X12 |     | FM 419 D3-1 24X12 |
|     | ← M6-1L 21x15     |     | ← M6-1L 21x15     |
| (D) | DETOUR M4-8 24X12 | (I) | DETOUR M4-8 24X12 |
|     | NORTH M3-3 24X12  |     | SOUTH M3-3 24X12  |
|     | FM 419 D3-1 24X12 |     | FM 419 D3-1 24X12 |
|     | ↶ M5-1R 21x15     |     | ↶ M5-1R 21x15     |
| (E) | DETOUR M4-8 24X12 | (J) | DETOUR M4-8 24X12 |
|     | NORTH M3-3 24X12  |     | SOUTH M3-3 24X12  |
|     | FM 419 D3-1 24X12 |     | FM 419 D3-1 24X12 |
|     | → M6-1R 21x15     |     | → M6-1R 21x15     |

NO.	DATE	REVISION	APPROVED



Walter P. Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

**FM 419  
 DETOUR LAYOUT**

SHEET 1 OF 1	
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.
6	SEE TITLE SHEET
STATE	DIST.
TX	ABL
CONT.	SECT.
1652	01
COUNTY	STREET/ROAD:
FISHER	FM 419

NOTE: REFER TO STANDARD WZ-RCD FOR ADDITIONAL SIGNAGE OR AS DIRECTED.

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:  
 FILE:

**BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:**

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

**WORKER SAFETY NOTES:**

1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

**COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES**

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

<p><b>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT</b>  <a href="http://www.txdot.gov">http://www.txdot.gov</a></p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12




**BARRICADE AND CONSTRUCTION  
 GENERAL NOTES  
 AND REQUIREMENTS**

**BC (1) - 21**

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
	1652	01	015	FM419
4-03 7-13	REVISIONS			
9-07 8-14	DIST	COUNTY	SHEET NO.	
5-10 5-21	ABL	FISHER	013	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

**TYPICAL LOCATION OF CROSSROAD SIGNS**

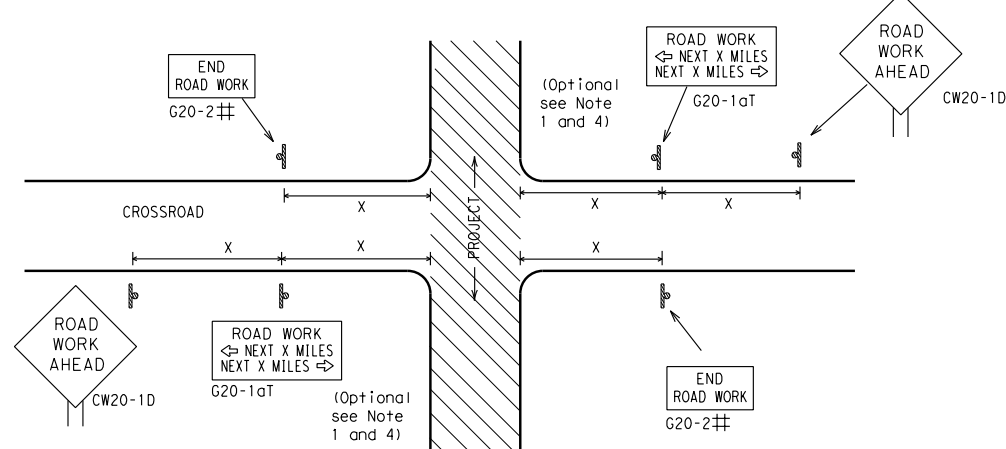

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
  - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
  - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
  - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
  - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
  - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

**T-INTERSECTION**

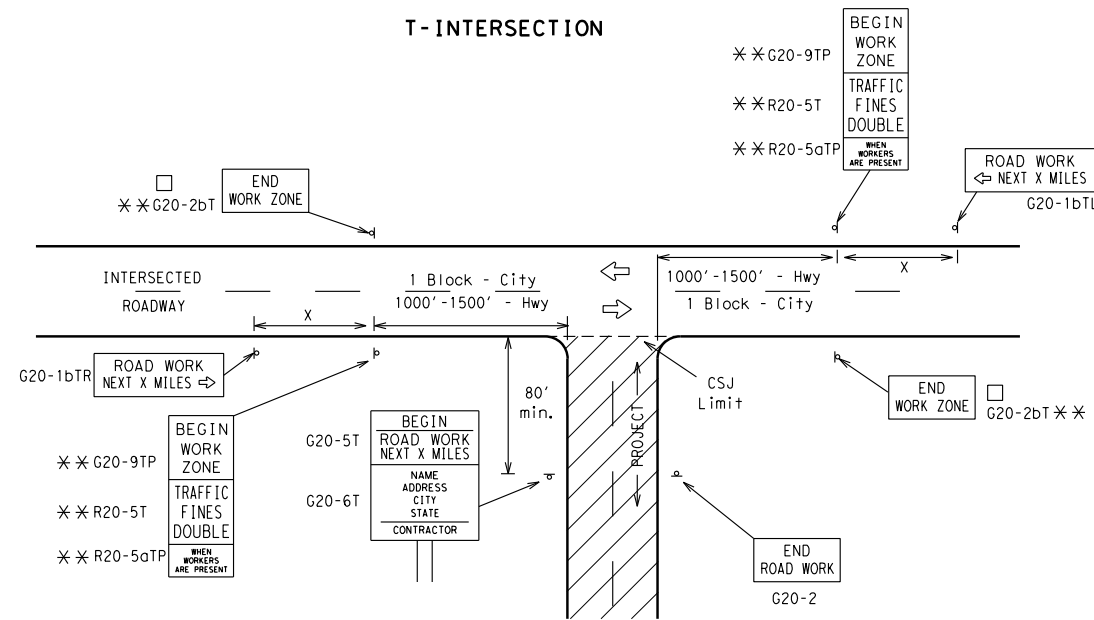

**CSJ LIMITS AT T-INTERSECTION**

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

**TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING<sup>1,5,6</sup>**

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "X" Feet (Apprx.)
CW20 <sup>4</sup>	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25	36" x 36"	48" x 48"	50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14			55	500 <sup>2</sup>
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12			60	600 <sup>2</sup>
			65	700 <sup>2</sup>
	48" x 48"	48" x 48"	70	800 <sup>2</sup>
			75	900 <sup>2</sup>
			80	1000 <sup>2</sup>
			*	* <sup>3</sup>


\* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

**GENERAL NOTES**


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

**WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS**

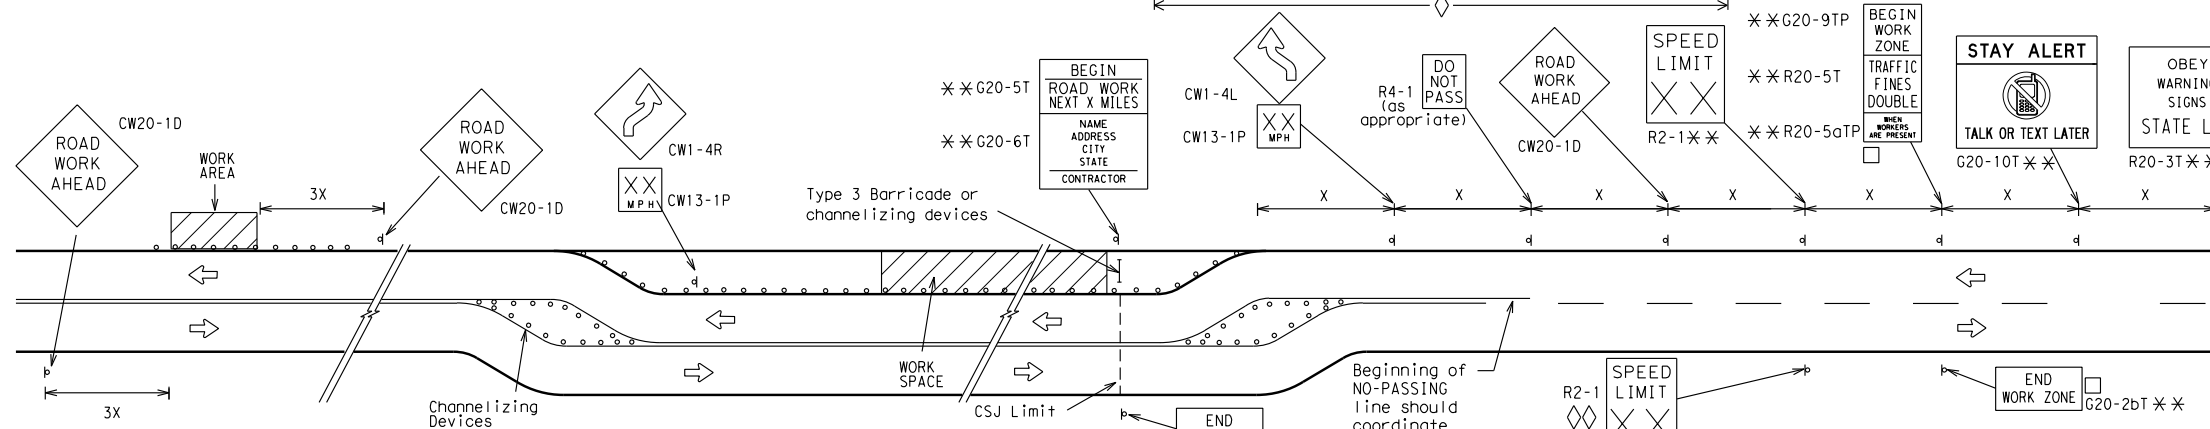

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

**SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS**

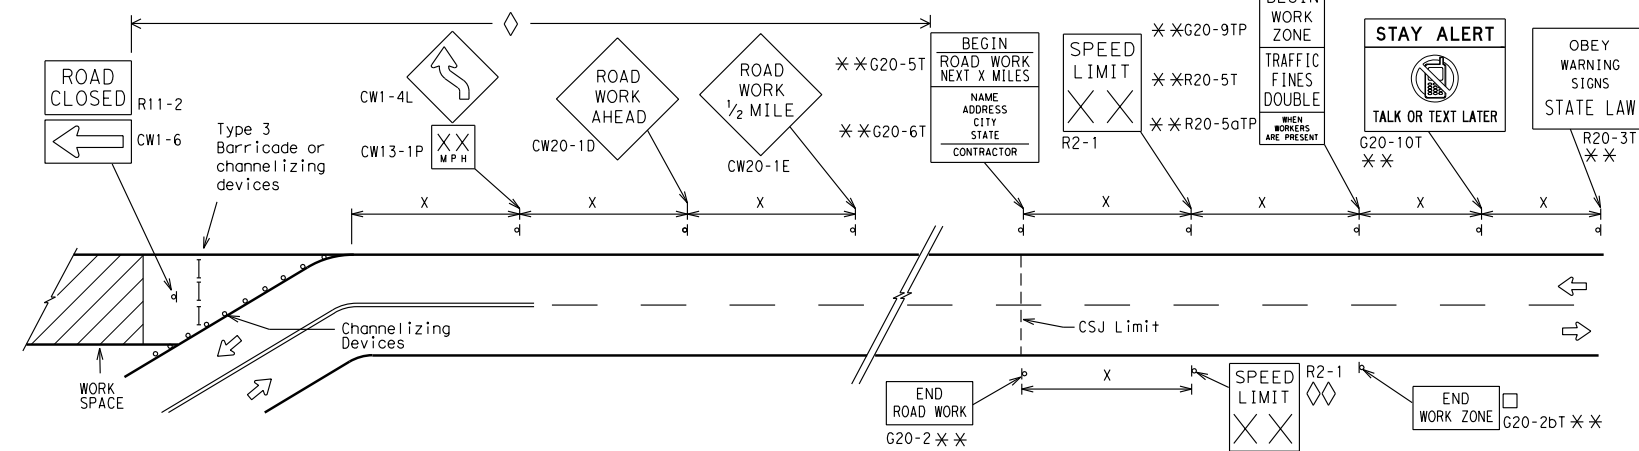

**NOTES**

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
  - \*\* CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
  - ◇ Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
  - ◇◇ Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND	
—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



**BARRICADE AND CONSTRUCTION PROJECT LIMIT**

**BC (2) - 21**


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	ABL	FISHER	014	

DATE: FILE:

# TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

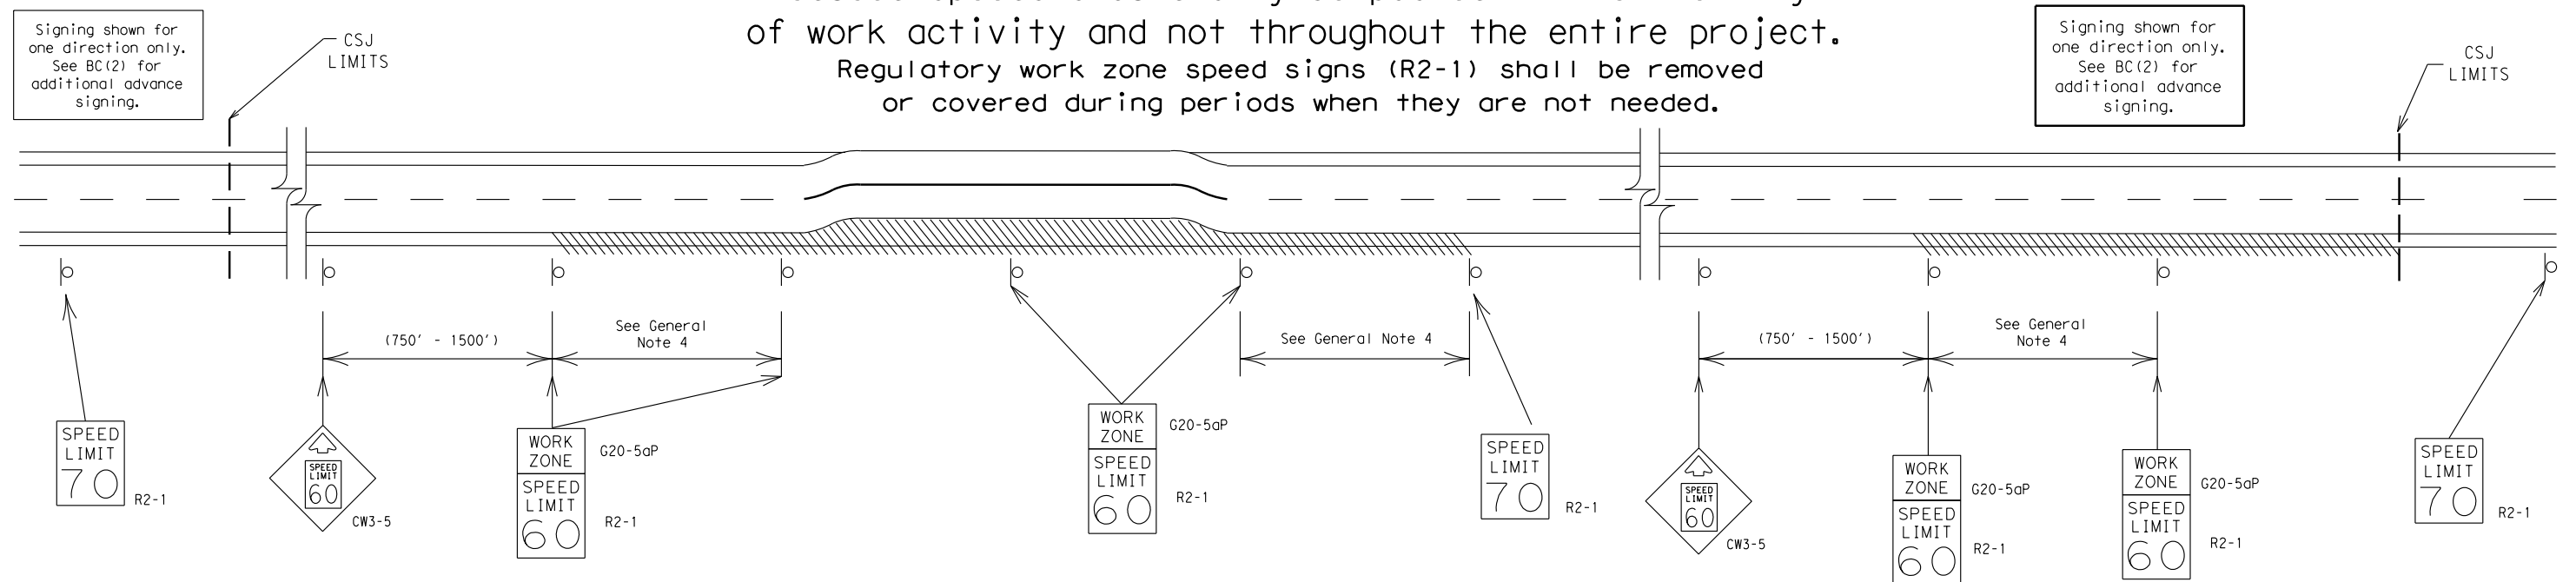

## GUIDANCE FOR USE:

### LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

### SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

## GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
 

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
  - Law enforcement.
  - Flagger stationed next to sign.
  - Portable changeable message sign (PCMS).
  - Low-power (drone) radar transmitter.
  - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:  
FILE:

SHEET 3 OF 12




## BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

BC (3) - 21

FILE:	bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS		1652	01	015	FM419
9-07	8-14	DIST	COUNTY		SHEET NO.
7-13	5-21	ABL	FISHER		015

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


**TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS**

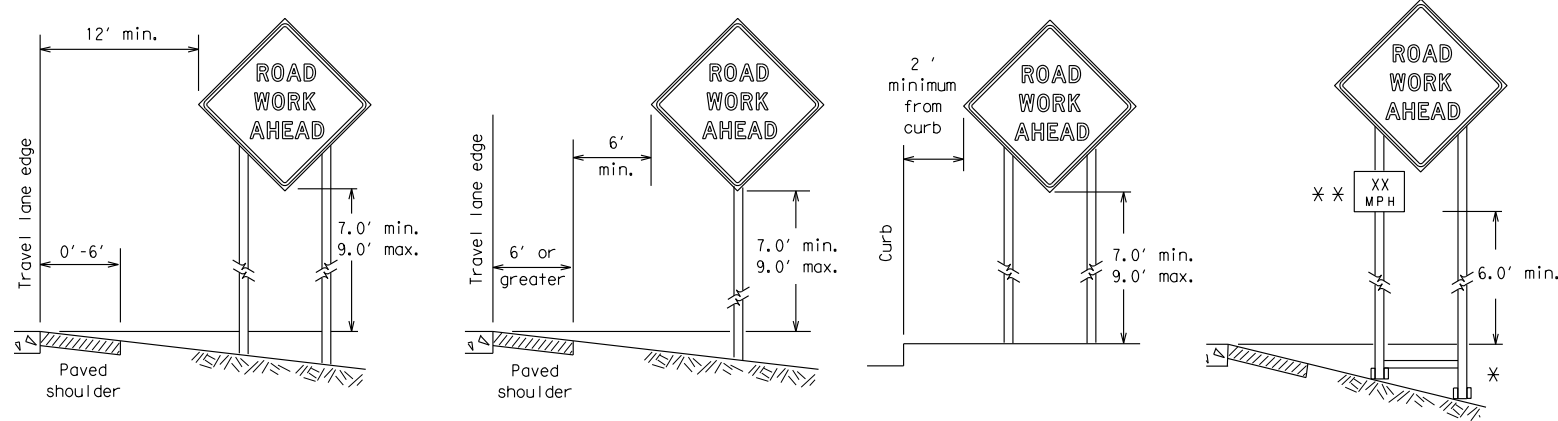

\* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

\*\* When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

**ATTACHMENT FOR SIGN SUPPORTS**

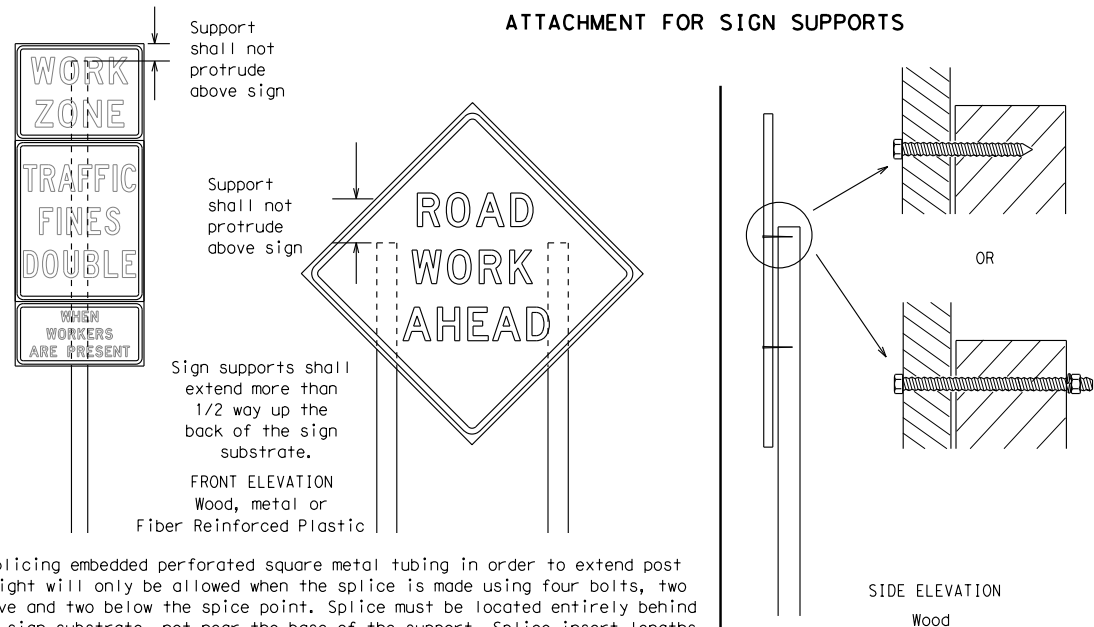

**Nails shall NOT be allowed.**  
Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

**GENERAL NOTES FOR WORK ZONE SIGNS**

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
- The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
- The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

**DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)**

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
  - Long-term stationary - work that occupies a location more than 3 days.
  - Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
  - Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
  - Short, duration - work that occupies a location up to 1 hour.
  - Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

**SIGN MOUNTING HEIGHT**

- The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
- The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
- Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
- Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
- Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

**SIZE OF SIGNS**

- The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

**SIGN SUBSTRATES**

- The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
- "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

**REFLECTIVE SHEETING**

- All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- Orange sheeting, meeting the requirements of DMS-8300 Type B<sub>FL</sub> or Type C<sub>FL</sub>, shall be used for rigid signs with orange backgrounds.

**SIGN LETTERS**

- All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

**REMOVING OR COVERING**

- When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
- Burlap shall NOT be used to cover signs.
- Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

**SIGN SUPPORT WEIGHTS**


- Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
- The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
- Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
- Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as fire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
- Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

**FLAGS ON SIGNS**

- Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

**STOP/SLOW PADDLES**

- STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
- STOP/SLOW paddles shall be retroreflective when used at night.
- STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

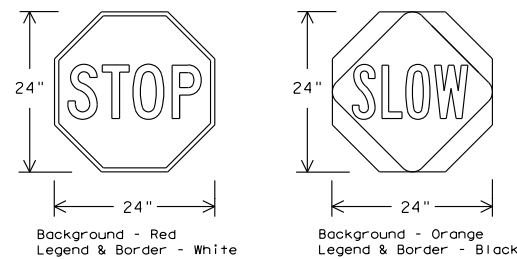

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

**CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS**

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.



Texas Department of Transportation  
Traffic Safety Division Standard

**BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES**

**BC (4) - 21**


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
9-07 8-14	DIST	COUNTY		SHEET NO.
7-13 5-21	ABL	FISHER		016

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

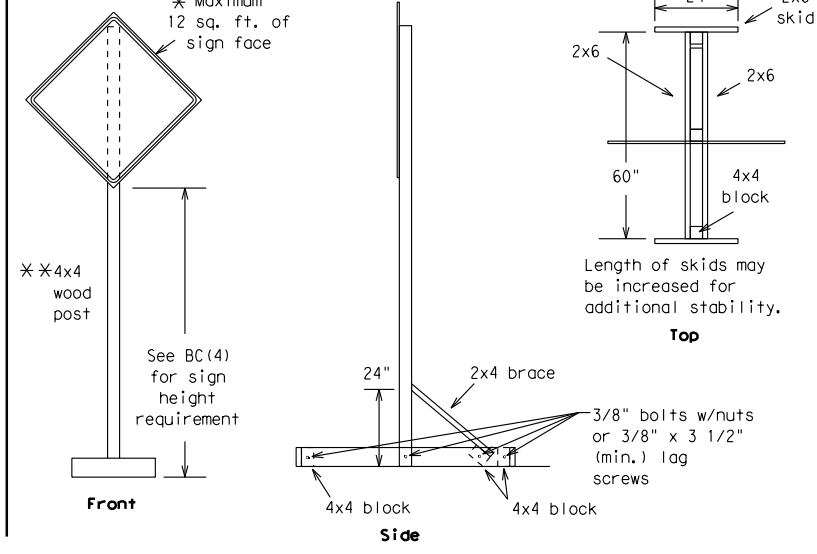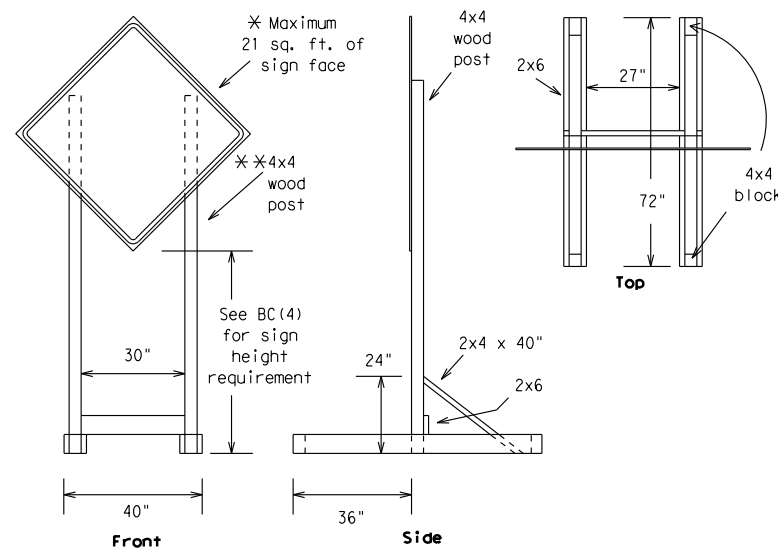



### SKID MOUNTED WOOD SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

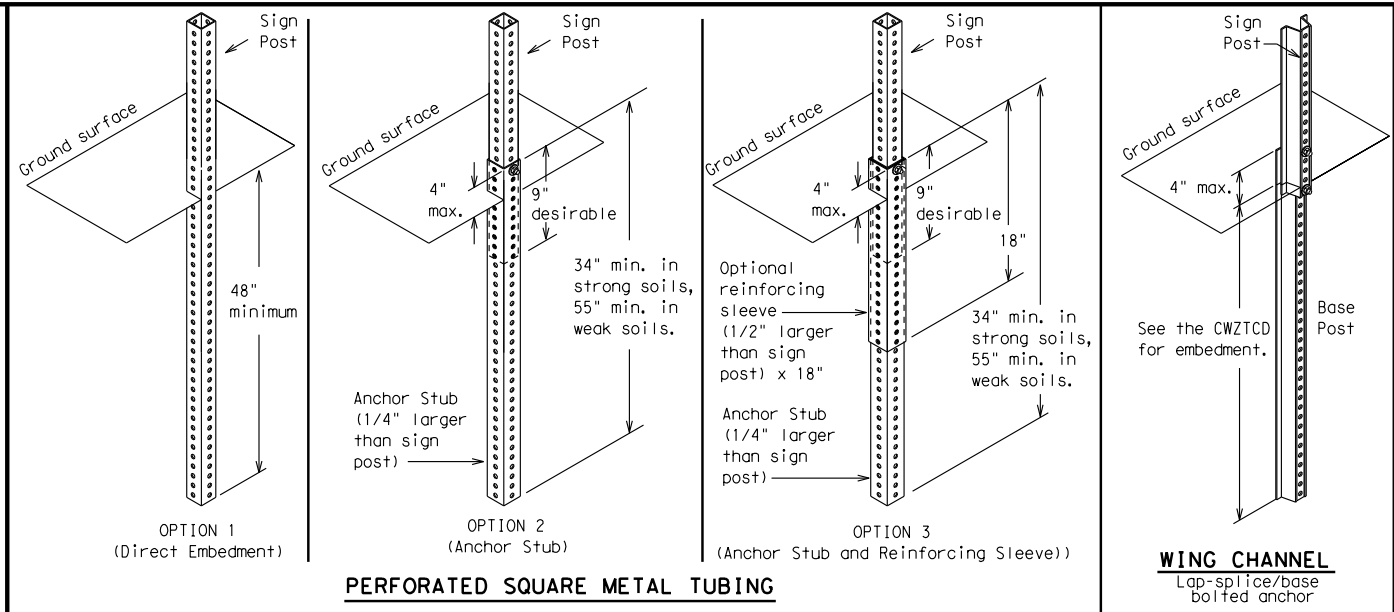

### GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

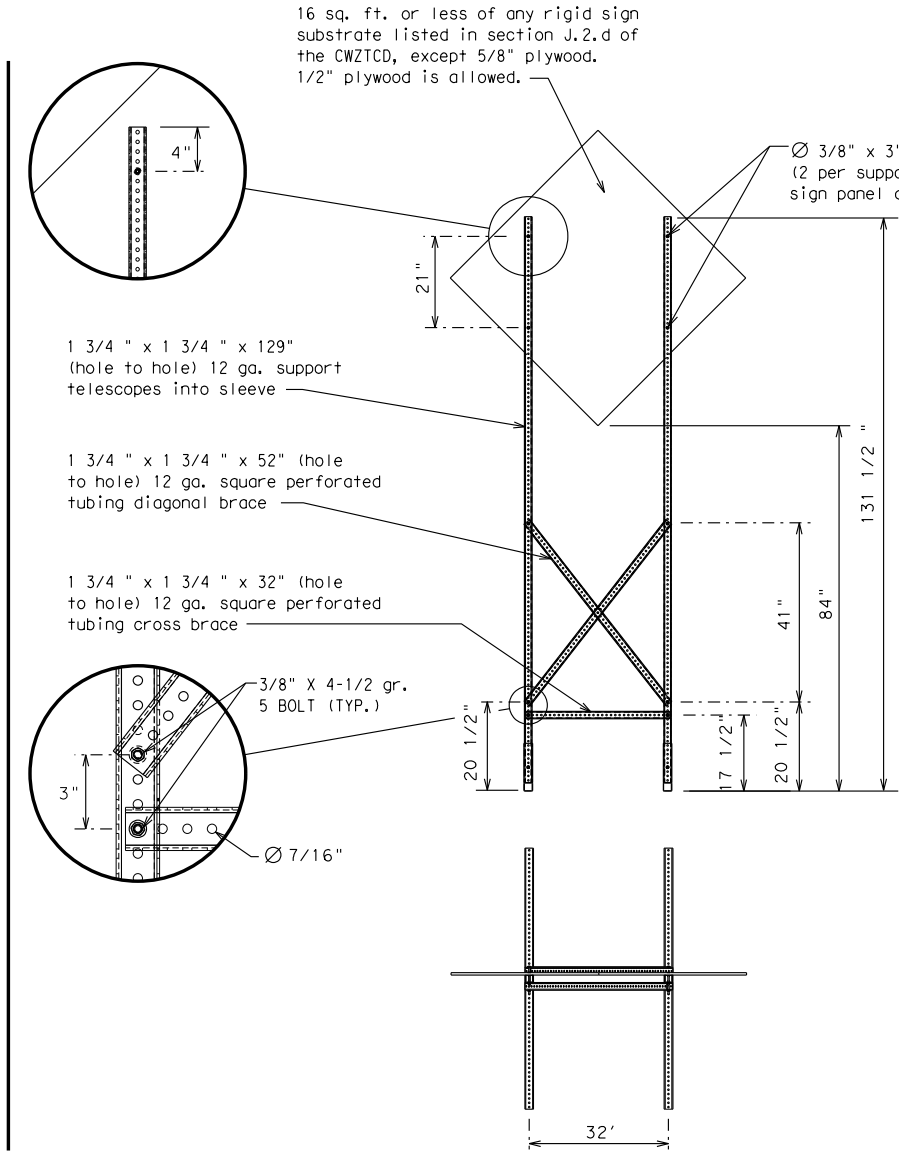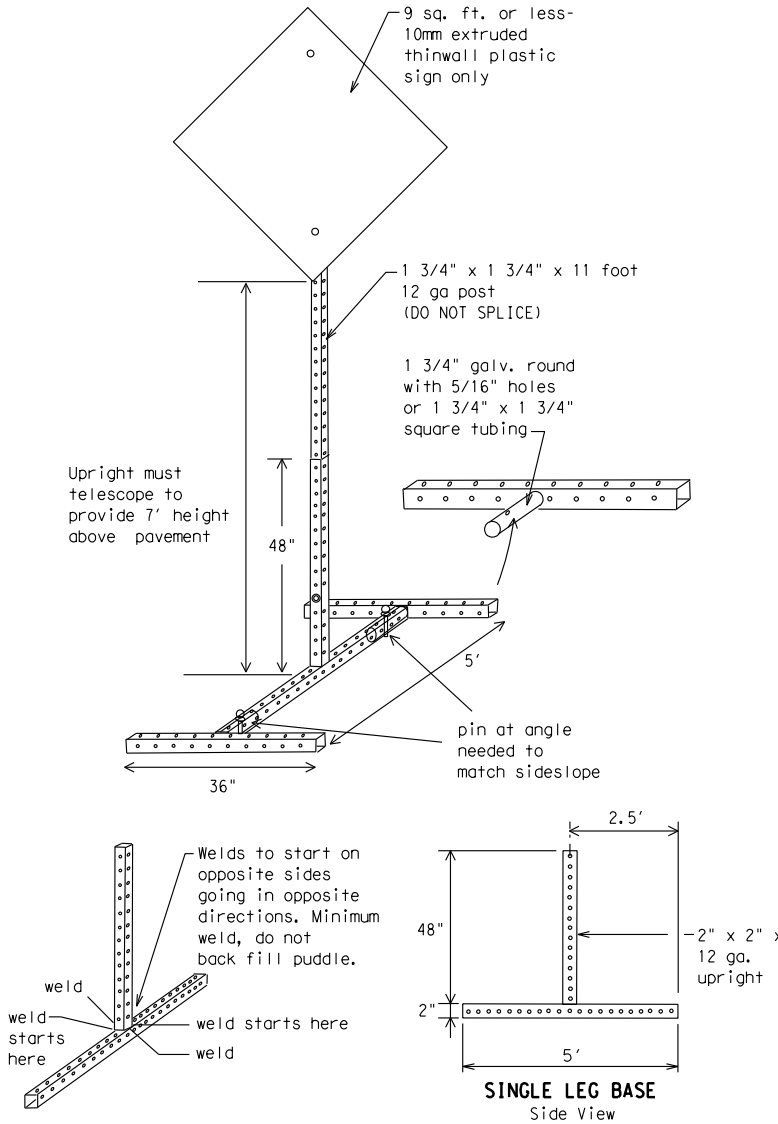

### SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

### WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

### OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

### GENERAL NOTES

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- \* See BC(4) for definition of "Work Duration."
- \*\* Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



## BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	ABL	FISHER	017	

DATE:  
FILE:

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

# RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

## PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

## Phase 1: Condition Lists

### Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

### Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI

ROADWORK XXX FT
FLAGGER XXXX FT
RIGHT LN NARROWS XXXX FT
MERGING TRAFFIC XXXX FT
LOOSE GRAVEL XXXX FT
DETOUR X MILE
ROADWORK PAST SH XXXX
BUMP XXXX FT
TRAFFIC SIGNAL XXXX FT

ROAD REPAIRS XXXX FT
LANE NARROWS XXXX FT
TWO-WAY TRAFFIC XX MILE
CONST TRAFFIC XXX FT
UNEVEN LANES XXXX FT
ROUGH ROAD XXXX FT
ROADWORK NEXT FRI-SUN
US XXX EXIT X MILES
LANES SHIFT *

\* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

## Phase 2: Possible Component Lists

### Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE *

### Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXXX
US XXX TO FM XXXX

### Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

### \*\* Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

\*\* See Application Guidelines Note 6.

## APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

## WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

## FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHS
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation # IH-number, US-number, SH-number, FM-number



## BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)


BC (6) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	ABL	FISHER	018	




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

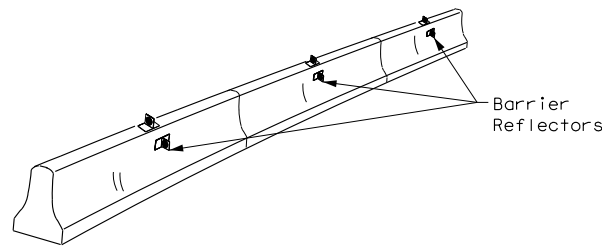

**CONCRETE TRAFFIC BARRIER (CTB)**

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

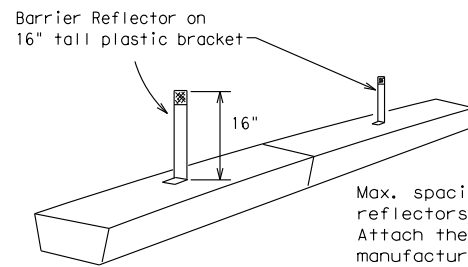


**LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES**

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

**LOW PROFILE CONCRETE BARRIER (LPCB)**

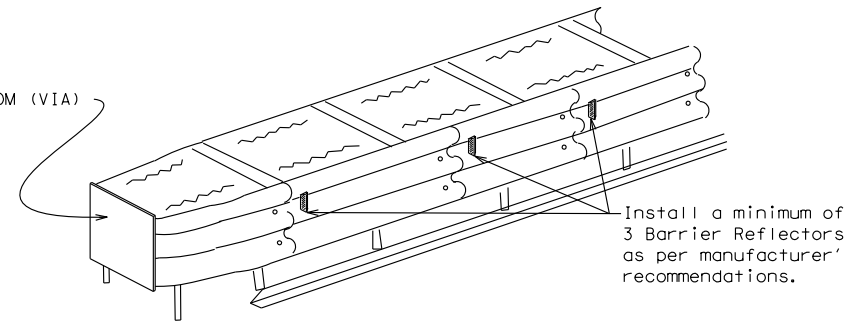

**DELINEATION OF END TREATMENTS**

**END TREATMENTS FOR CTB'S USED IN WORK ZONES**

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

**BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS**

**WARNING LIGHTS**


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B<sub>FL</sub> or C<sub>FL</sub> Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

**WARNING LIGHTS MOUNTED ON PLASTIC DRUMS**


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

**WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS**

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.



Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.




Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

DATE:  
FILE:

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

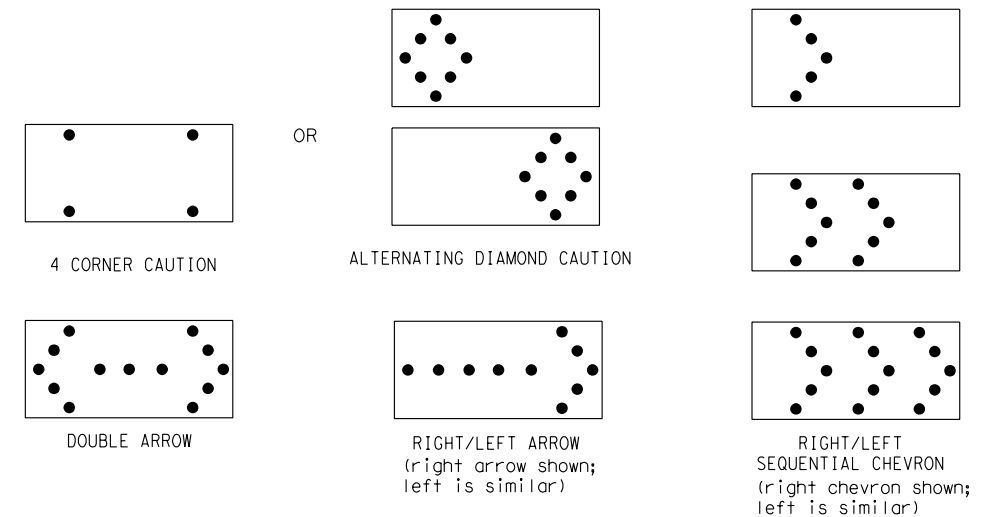

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

**ATTENTION**  
Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

**FLASHING ARROW BOARDS**

SHEET 7 OF 12

**TRUCK-MOUNTED ATTENUATORS**

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



**BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR**

**BC (7) - 21**

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	OW:	TxDOT	CK:	TxDOT
©TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		1652	01	015	FM419				
9-07	8-14	DIST	COUNTY		SHEET NO.				
7-13	5-21	ABL	FISHER		019				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

### GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

### GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:



- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

### RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.


### BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

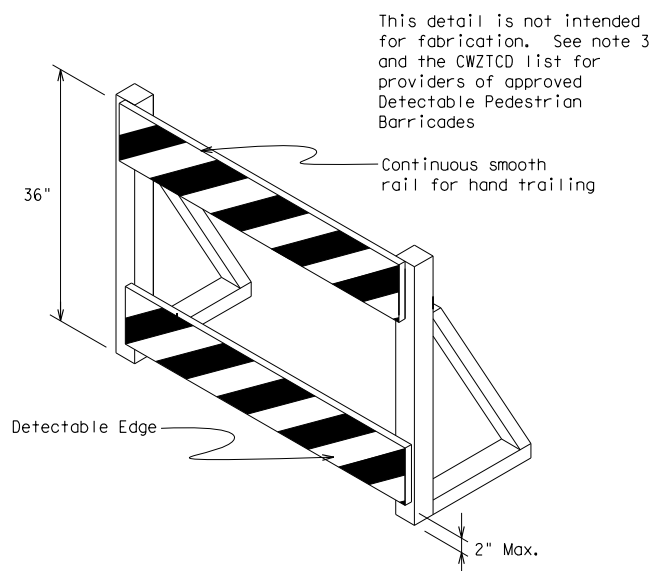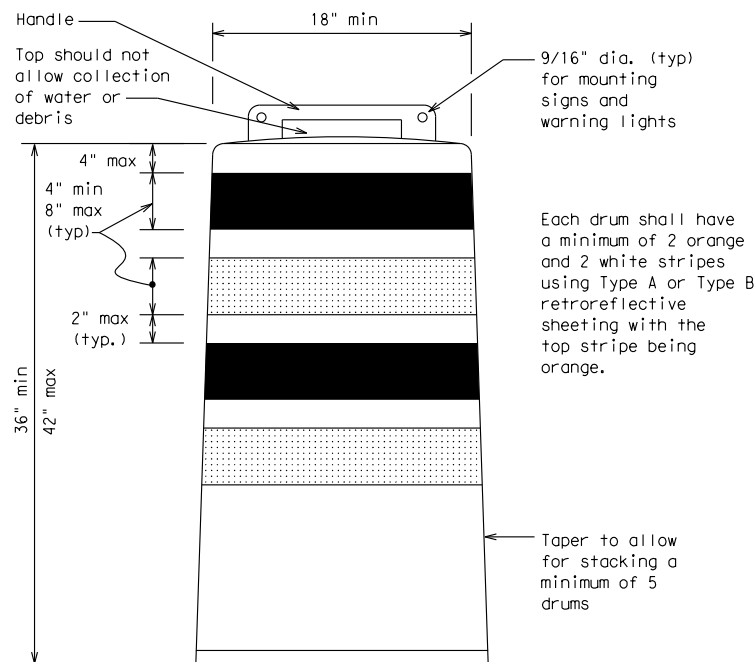

### DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.

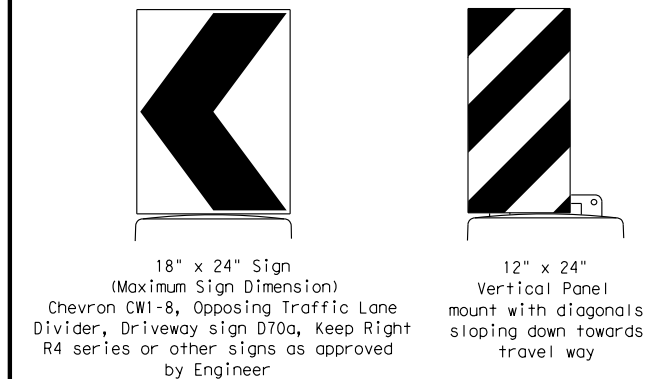

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

### SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B<sub>FL</sub> or Type C<sub>FL</sub> Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




## BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (8) - 21


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DN:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		1652	01	015	FM419				
4-03	8-14	DIST	COUNTY		SHEET NO.				
9-07	5-21	ABL	FISHER		020				
7-13									

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

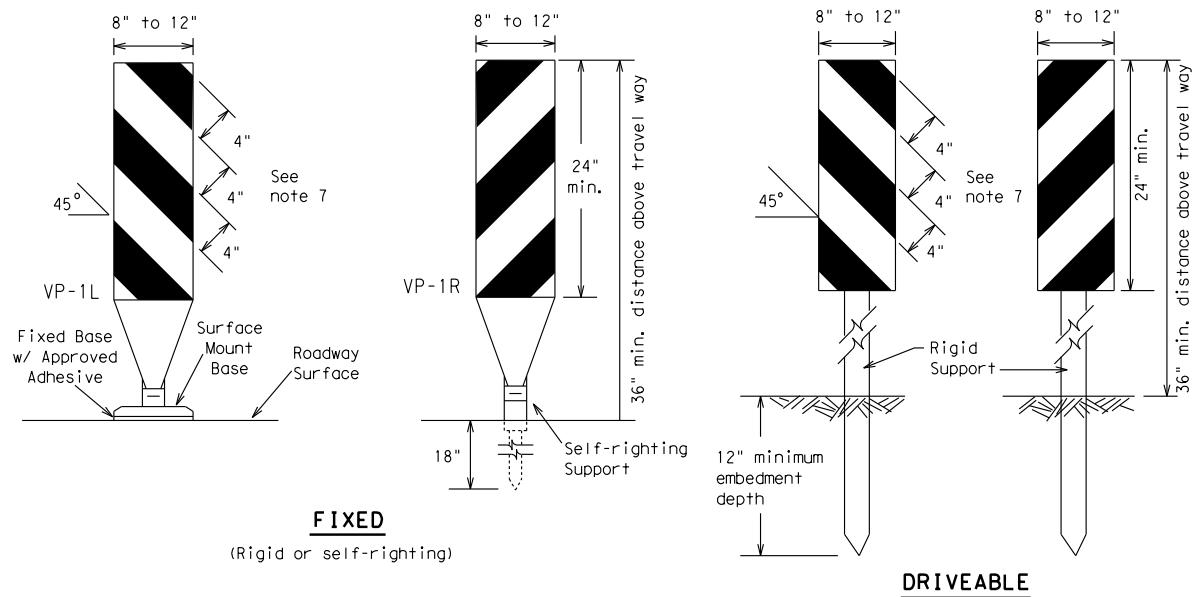

**FIXED**  
(Rigid or self-righting)


**DRIVEABLE**

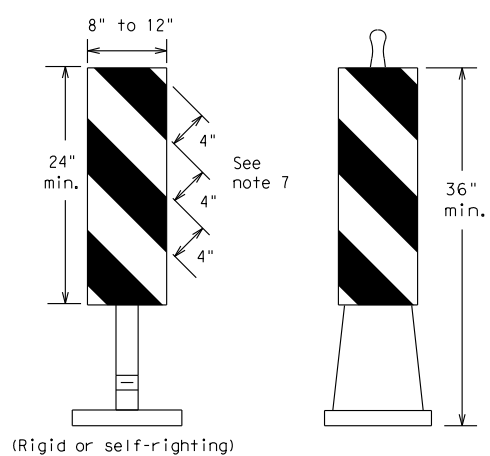

**PORTABLE**


**VERTICAL PANELS (VPs)**

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

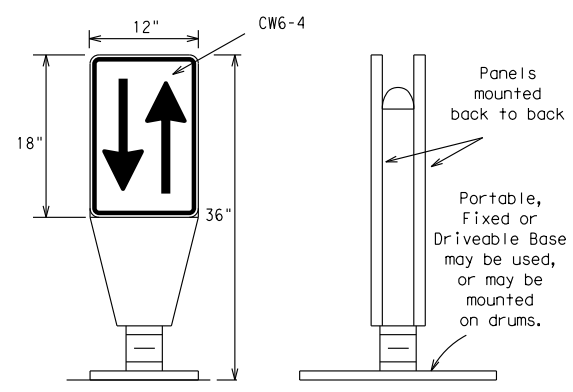

**OPPOSING TRAFFIC LANE DIVIDERS (OTLD)**


- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B<sub>FL</sub> or Type C<sub>FL</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

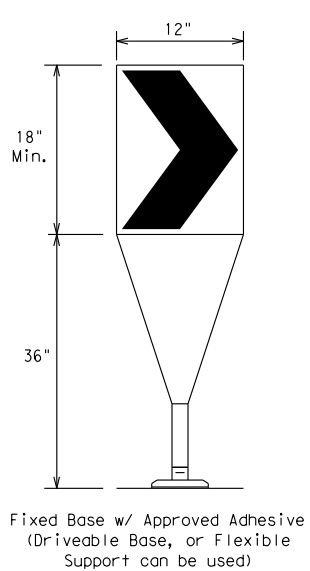

Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B<sub>FL</sub> or Type C<sub>FL</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

**CHEVRONS**

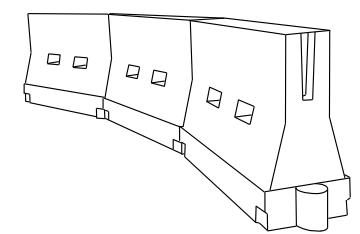

**LONGITUDINAL CHANNELIZING DEVICES (LCD)**

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

**WATER BALLASTED SYSTEMS USED AS BARRIERS**

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

**HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS**

**GENERAL NOTES**

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths * X			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

\*X Taper lengths have been rounded off.  
L=Length of Taper (FT.) W=Width of Offset (FT.)  
S=Posted Speed (MPH)

**SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS**

SHEET 9 OF 12



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC (9) - 21**

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	ABL	FISHER	021	


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


**TYPE 3 BARRICADES**

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




**TYPICAL STRIPING DETAIL FOR BARRICADE RAIL**

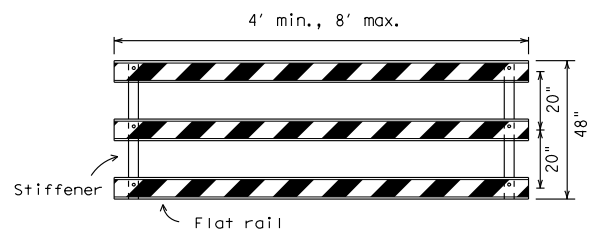

Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.


**TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES**

Each roadway of a divided highway shall be barricaded in the same manner.

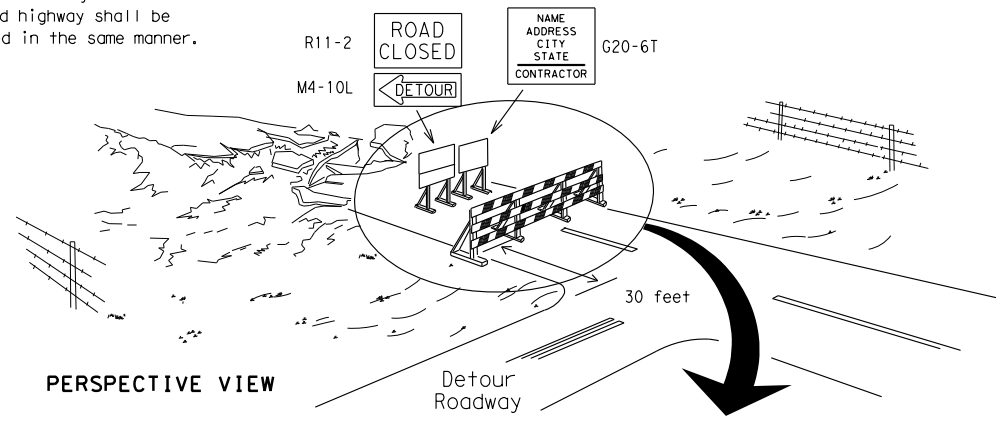

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

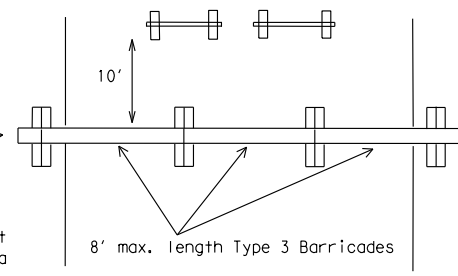


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

**TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION**

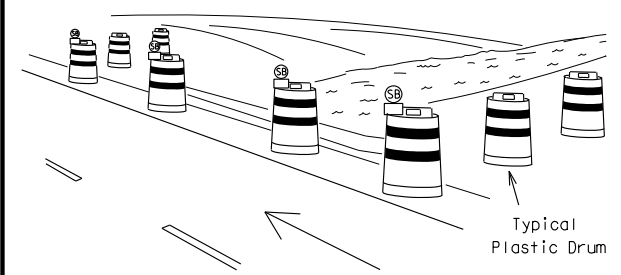

PERSPECTIVE VIEW

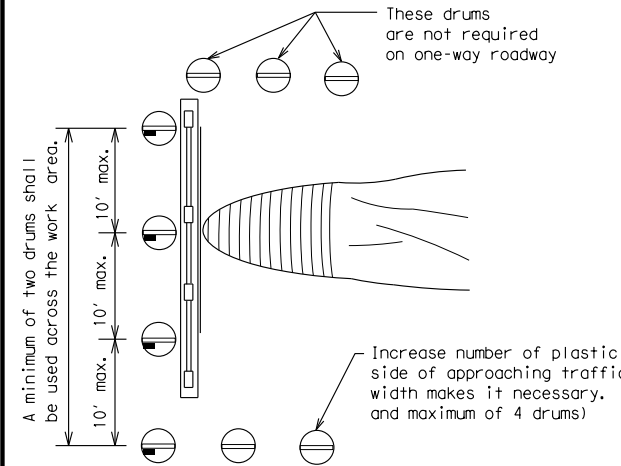


PLAN VIEW

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

**CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS**

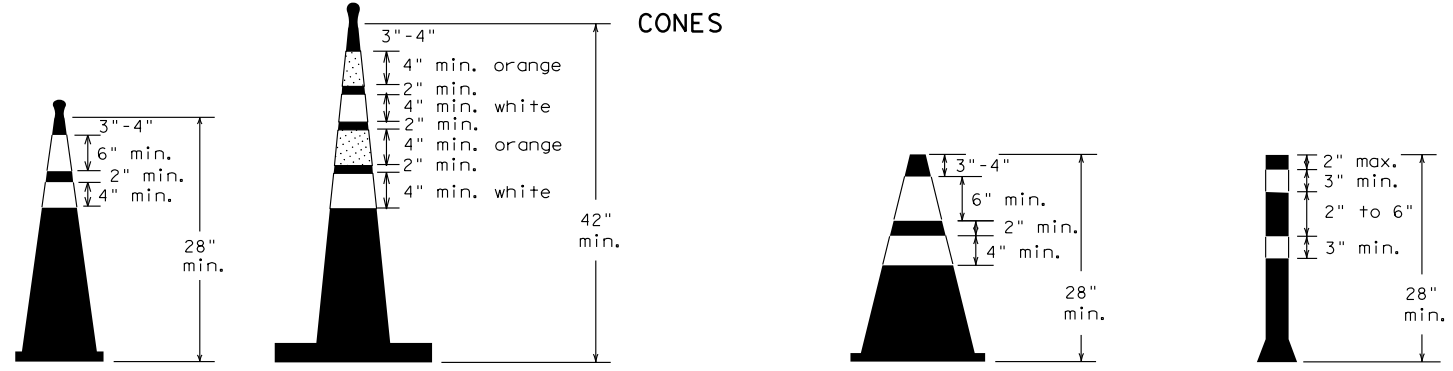


Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.  
42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.

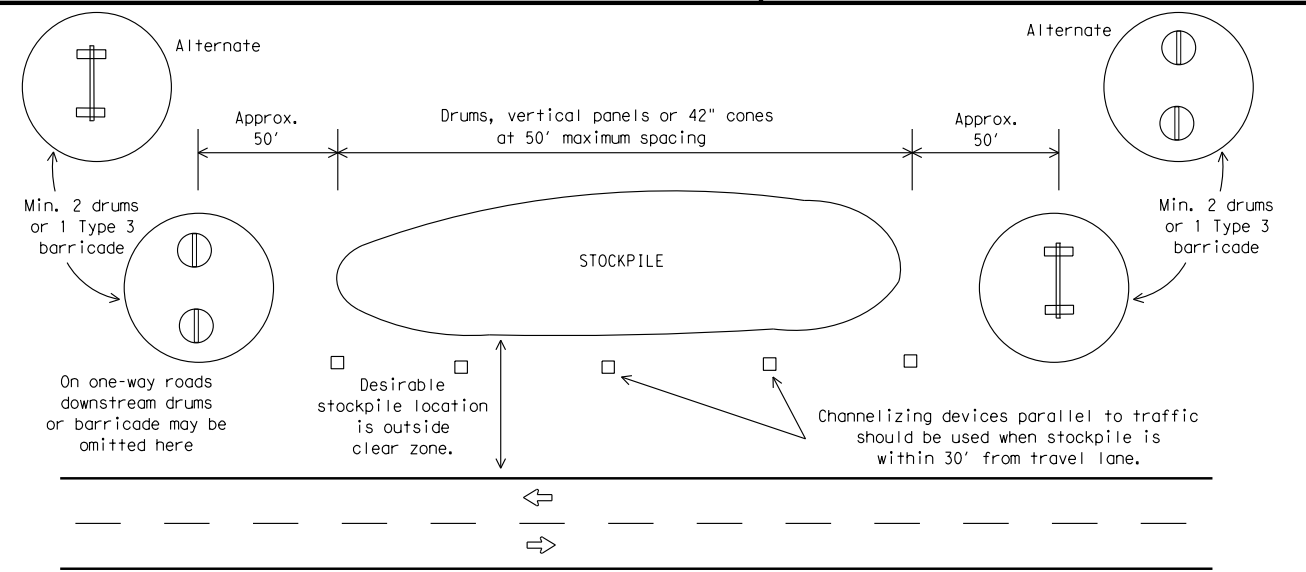

**TRAFFIC CONTROL FOR MATERIAL STOCKPILES**



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC (10) - 21**

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
9-07 8-14	DIST	COUNTY		SHEET NO.
7-13 5-21	ABL	FISHER		022

DATE: FILE:

## WORK ZONE PAVEMENT MARKINGS

### GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

### RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

### PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


### MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

### REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

## Temporary Flexible-Reflective Roadway Marker Tabs

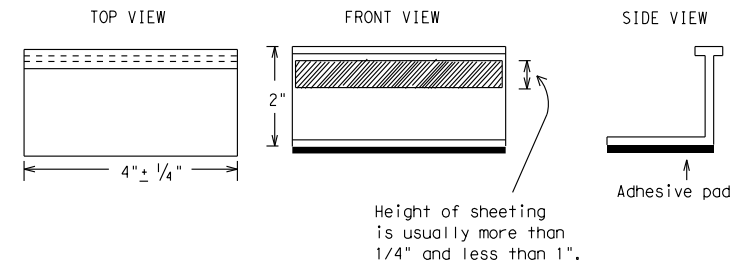

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE  
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER  
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
  - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
  - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

### RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:  
 YELLOW - (two amber reflective surfaces with yellow body).  
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



## BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS


**BC(11) - 21**

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
	1652	01	015	FM419
REVISIONS	DIST	COUNTY	SHEET NO.	
2-98 9-07 5-21	ABL	FISHER	023	
1-02 7-13				
11-02 8-14				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:  
FILE:

## PAVEMENT MARKING PATTERNS




REFLECTORIZED PAVEMENT MARKINGS - PATTERN A




REFLECTORIZED PAVEMENT MARKINGS - PATTERN B

Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.




RAISED PAVEMENT MARKERS - PATTERN A




RAISED PAVEMENT MARKERS - PATTERN B

## CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

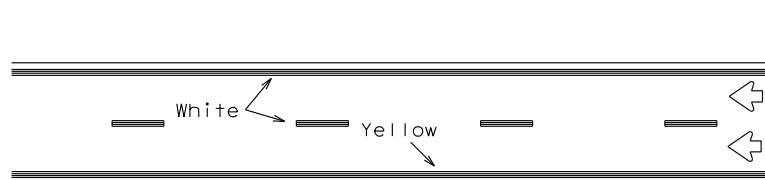

REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

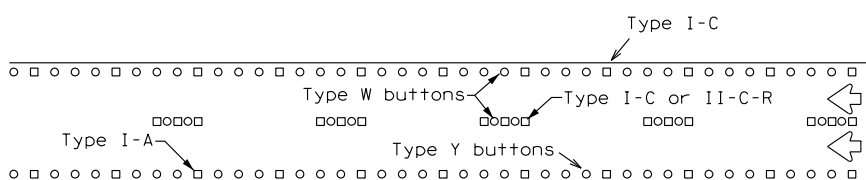


RAISED PAVEMENT MARKERS

## EDGE & LANE LINES FOR DIVIDED HIGHWAY



REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

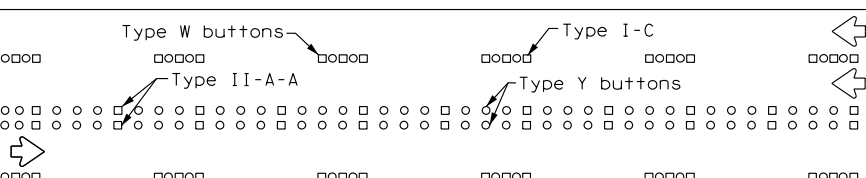


RAISED PAVEMENT MARKERS

## LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS



REFLECTORIZED PAVEMENT MARKINGS


Prefabricated markings may be substituted for reflectORIZED pavement markings.

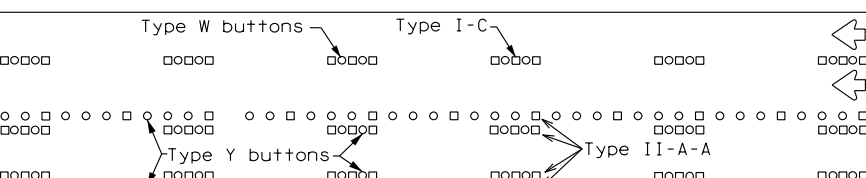



RAISED PAVEMENT MARKERS

## TWO-WAY LEFT TURN LANE


## STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

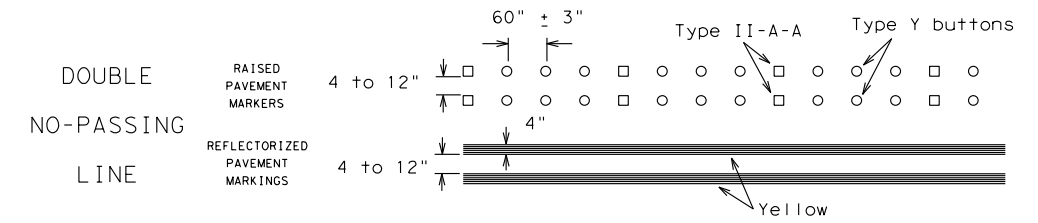


### SOLID LINES

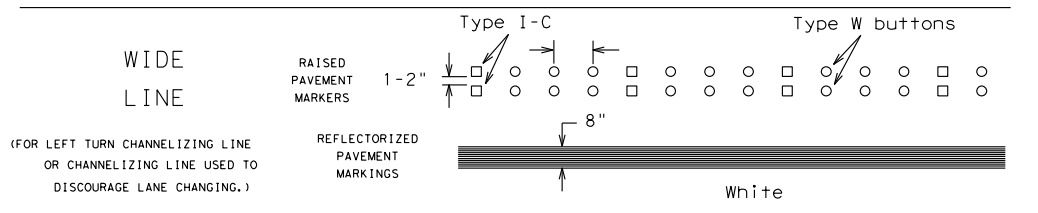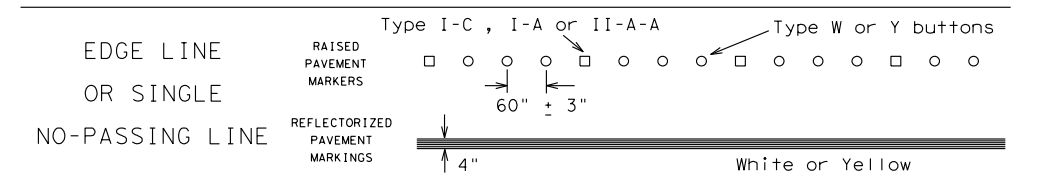

### BROKEN LINES

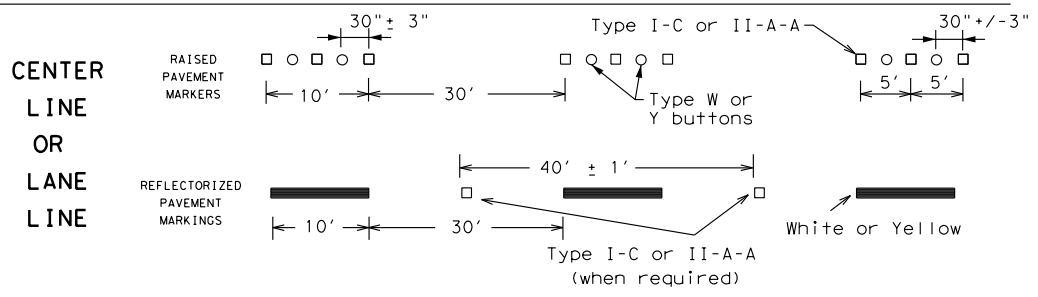


### AUXILIARY OR LANEDROP LINE

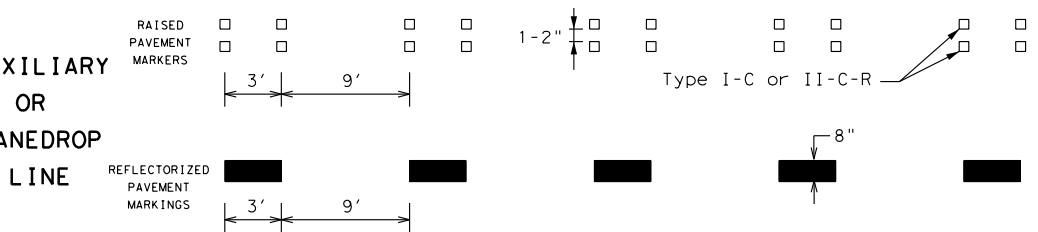

### REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

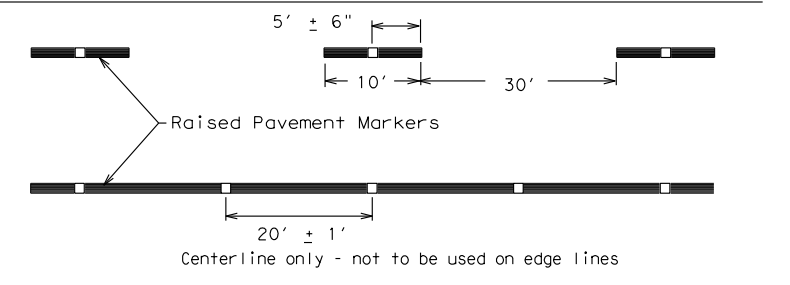

SHEET 12 OF 12



## BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	OW: TxDOT	CK: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
1-97 9-07 5-21	1652	01	015	FM419
2-98 7-13	DIST	COUNTY	SHEET NO.	
11-02 8-14	ABL	FISHER	024	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:  
FILE:

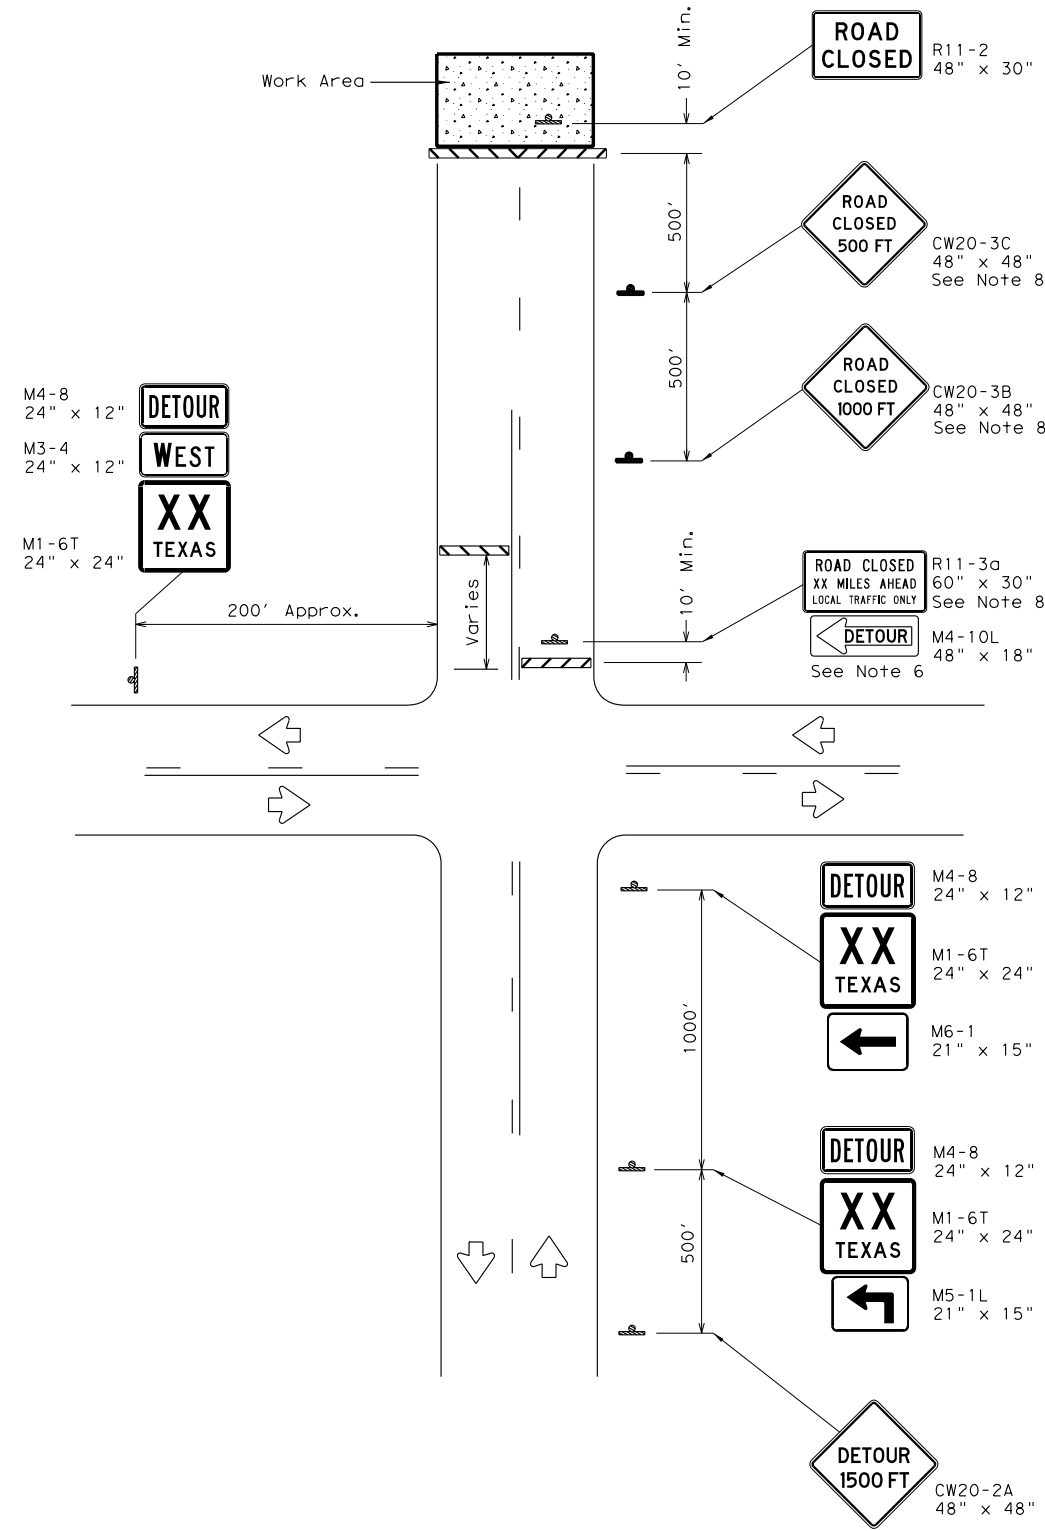

**ROAD CLOSURE BEYOND THE INTERSECTION**  
Signing for a Numbered Route with an Off-Site Detour

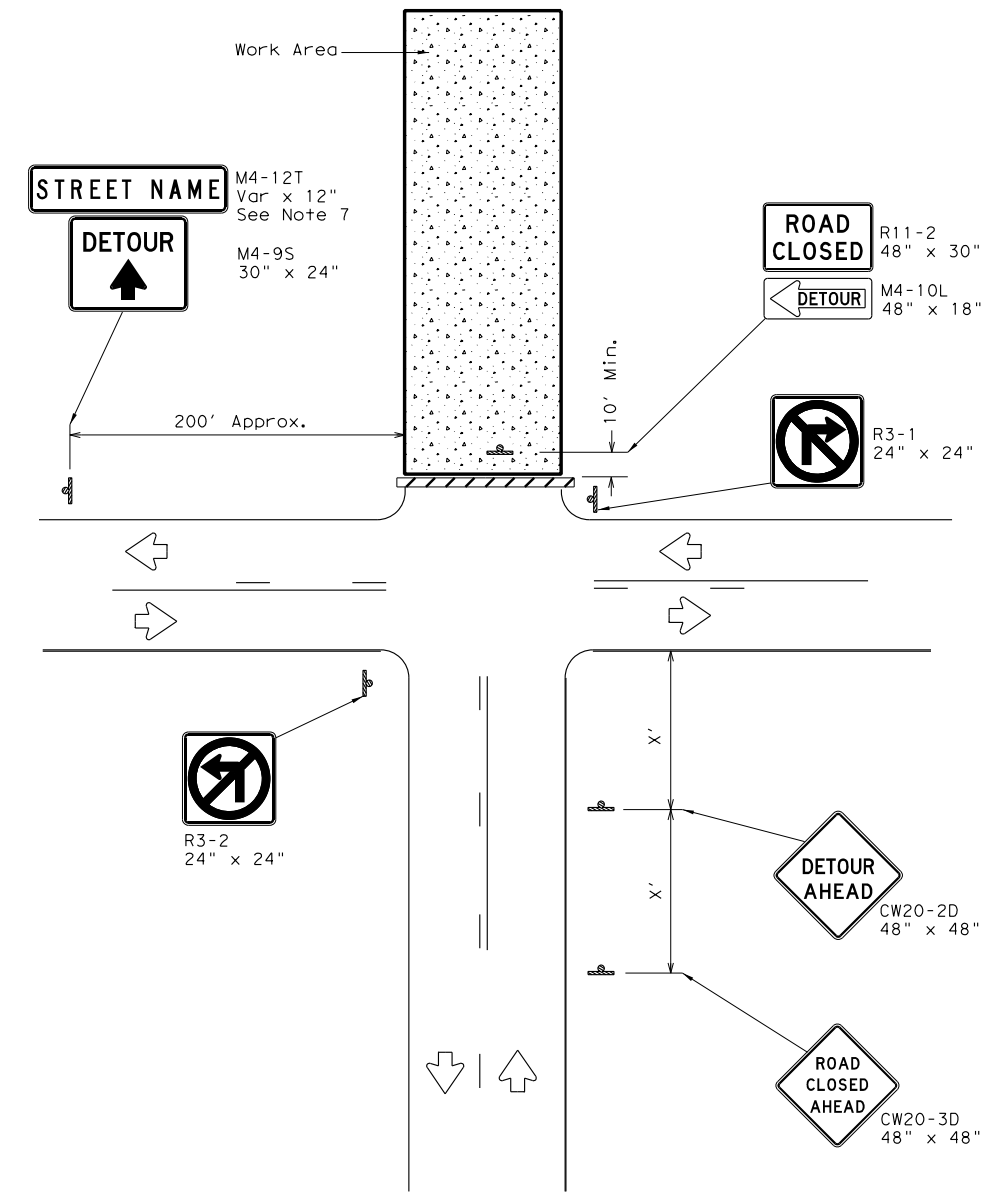

**ROAD CLOSURE AT THE INTERSECTION**  
Signing for an Un-numbered Route with an Off-Site Detour

LEGEND	
	Type 3 Barricade
	Sign

Posted Speed *	Minimum Sign Spacing "X" Distance
30	120'
35	160'
40	240'
45	320'
50	400'
55	500'
60	600'
65	700'
70	800'
75	900'

\* Conventional Roads Only

**GENERAL NOTES**

1. This sheet is intended to provide details for temporary work zone road closures. For permanent road closure details see the D&OM standards.
2. Barricades used shall meet the requirements shown on Barricade and Construction Standard BC(10) and listed on the Compliant Work Zone Traffic Control Devices List (CWZTCD).
3. Stockpiled materials shall not be placed on the traffic side of barricades.
4. Barricades at the road closure should extend from pavement edge to pavement edge.
5. Detour signing shown is intended to illustrate the type of signing that is appropriate for numbered routes or un-numbered routes as labeled. It does not indicate the full extent of detour signing required. Detour routes should be signed as shown elsewhere in the plans.
6. If the road is open for a significant distance beyond the intersection or there are significant origin/destination points beyond the intersection, the signs and barricades at this location should be located at the edge of the traveled way.
7. The Street Name (M4-12T) sign is to be placed above the DETOUR (M4-9S) sign.
8. For urban areas where there is a shorter distance between the intersection and the actual closure location, the ROAD CLOSED XX MILES AHEAD (R11-3a) sign may be replaced with a ROAD CLOSED TO THRU TRAFFIC (R11-4) sign. If adequate space does not exist between the intersection and the closure a single ROAD CLOSED AHEAD (CW20-3D) sign spaced as per the table above may replace the ROAD CLOSED 1000 FT (CW20-3B) and ROAD CLOSED 500 FT (CW20-3C) signs.
9. Signs and barricades shown shall be subsidiary to Item 502. Locations where these details will be required shall be as shown elsewhere in the plans.





**WORK ZONE ROAD CLOSURE DETAILS**

**WZ (RCD) - 13**

FILE: wzrcd-13.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 1995	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
1-97 4-98 7-13	DIST	COUNTY	SHEET NO.	
2-98 3-03	ABL	FISHER	025	



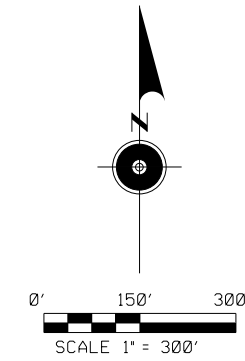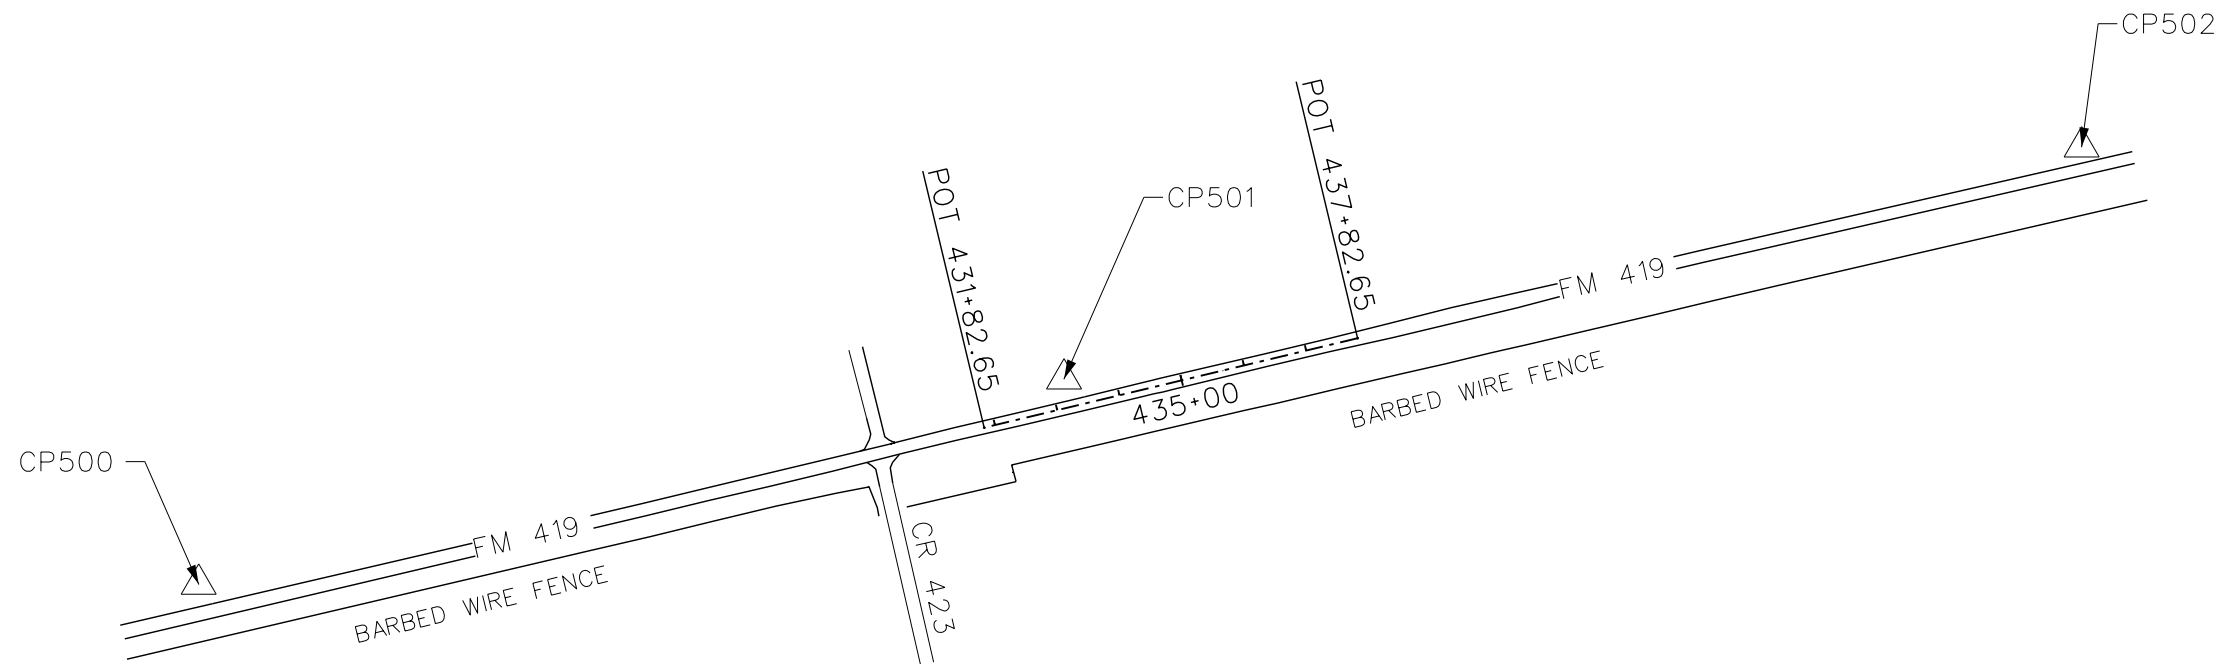


**LEGEND**  
 PRIMARY CONTROL POINT

CONTROL POINTS (SURFACE COORDINATES)							
POINT	NORTH	EAST	ELEVATION	STATION	OFFSET	LT/RT	DESCRIPTION
500	6,935,691.257	1,366,282.381	2,044.69	NA	NA	NA	3 1/2" ALUMINUM DISK SET IN CONCRETE
501	6,936,012.923	1,367,629.381	2,025.15	433+23.81	30.28'	LT	3 1/2" ALUMINUM DISK SET IN CONCRETE
502	6,936,389.247	1,369,214.021	2,014.51	NA	NA	NA	3 1/2" ALUMINUM DISK SET IN CONCRETE

**NOTES:**

1. THE SURVEY CONTROL INFORMATION HAS BEEN ACCEPTED AND INCORPORATED INTO THIS PS&E WHICH IS SIGNED, SEALED AND DATED BY A TEXAS PROFESSIONAL ENGINEER.
2. ALL COORDINATES SHOWN HEREON ARE BASED ON THE TEXAS COORDINATE SYSTEM, NORTH CENTRAL ZONE (4202), NORTH AMERICAN DATUM OF 1983 (2011 ADJ: EPOCH 2010.00)
3. THE VERTICAL DATUM FOR THIS PROJECT IS THE NAVD 1988 (CORS 2011), U.S. SURVEY FEET.
4. ALL COORDINATE VALUES ARE BASED UPON AN AVERAGE OF FOUR 180 EPOCH OBSERVATIONS UTILIZING THE TxDOT VRS NETWORK.
5. COORDINATES AND DISTANCES ARE U.S. SURVEY FEET. DISPLAYED IN SURFACE VALUES USING THE SURFACE ADJUSTMENT FACTOR 1.00021 (0.9997900441)



*Eric A. Kreiner* 06/28/23  
 Eric A. Kreiner Date  
 RPLS No. 5320

**SAM** Surveying and Mapping, LLC. (SAM)  
 1341 W. Mockingbird Lane, Suite 400W  
 Dallas, Tx 75247 - (214) 631-7888  
 FIRM REGISTRATION NO. F-1937  
 TBPLS REGISTRATION NO. 10064301

© 2023  
**Texas Department of Transportation**


**walter p moore** Walter P Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

<b>FM 419</b>			
<b>SURVEY CONTROL POINTS</b>			
			SHEET 1 OF 2
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		026
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

\$USER\$  
 \$TIMES\$  
 \$DATES\$  
 \$FILES\$  
 DATE: FILE:


500  
 N:6,935,691.257  
 E:1,366,282.381  
 ELEV: 2,044.69

+/- 0.2 OF A MILE TO  
 THE INTERSECTION OF FM  
 419 AND CR 423.

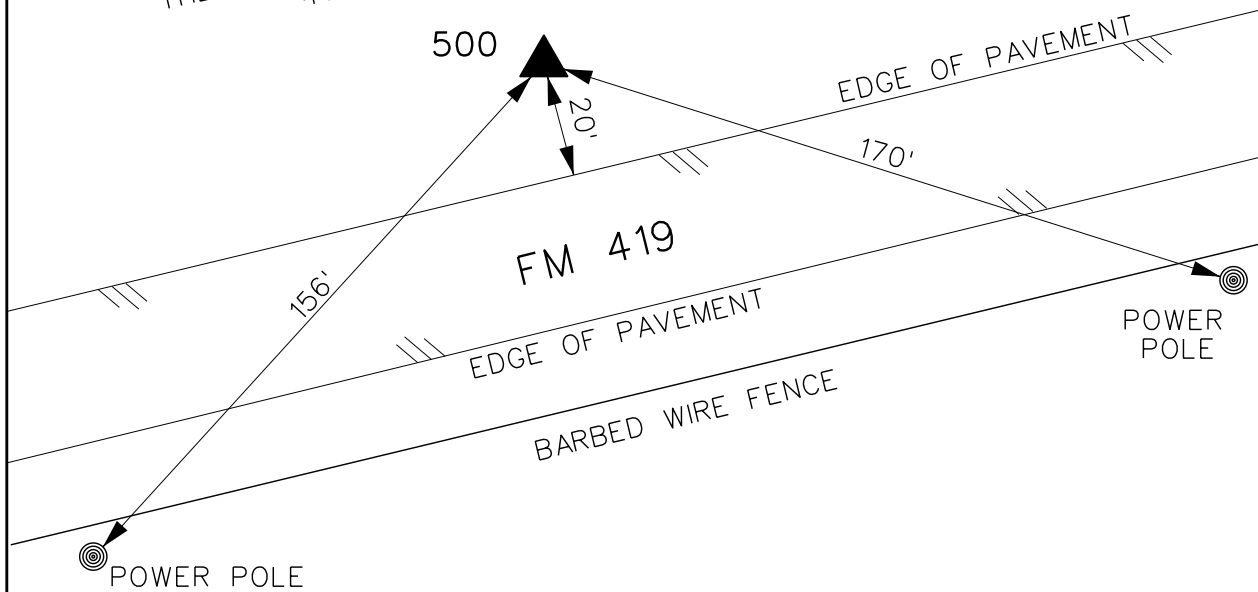

3 1/2" ALUMINUM DISK SET IN CONCRETE STAMPED "500", +/- 0.2 OF A MILE WEST OF THE INTERSECTION OF FM 419 AND CR 423, 20' NORTH OF THE NORTH EDGE OF PAVEMENT OF FM 419, 156' NORTHEAST OF A POWER POLE, AND 170' NORTHWEST OF ANOTHER POWER POLE.

501  
 N:6,936,012.923  
 E:1,367,629.381  
 ELEV: 2025.15

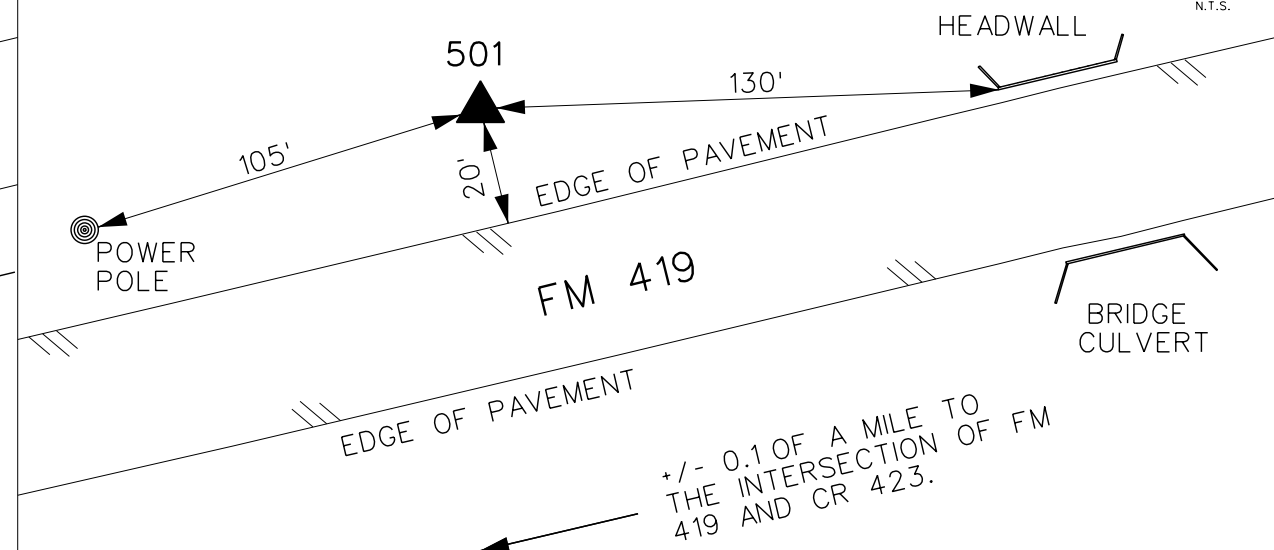


3 1/2" ALUMINUM DISK SET IN CONCRETE STAMPED "501", +/- 0.1 OF A MILE EAST OF THE INTERSECTION OF FM 419 AND CR 423, 20' NORTH OF THE NORTH EDGE OF PAVEMENT OF FM 419, 105' EAST OF A POWER POLE, AND 130' WEST OF THE SOUTHWEST CORNER OF A HEADWALL.

- NOTE:
1. ALL BEARINGS AND COORDINATES SHOWN HEREON ARE BASED ON THE TEXAS COORDINATE SYSTEM, NORTH CENTRAL ZONE (4202), NORTH AMERICAN DATUM OF 1983 (2011 ADJ.: EPOCH 2010.00).
  2. ALL ELEVATIONS SHOWN HEREON ARE REFERENCED TO THE NORTH AMERICAN VERTICAL DATUM OF 1988 (GEOID 18).
  3. COORDINATES AND DISTANCES ARE U.S. SURVEY FEET, DISPLAYED IN SURFACE VALUES, AND MAY BE CONVERTED TO GRID VALUES BY DIVIDING BY THE PROJECT SURFACE ADJUSTMENT FACTOR OF 1.00021.
  4. HORIZONTAL AND VERTICAL VALUES WERE DERIVED FROM UTILIZING THE STATE VIRTUAL REFERENCE SYSTEM NETWORK IN JANUARY 2023.



502  
 N:6,936,389.247  
 E:1,369,214.021  
 ELEV: 2,014.51

+/- 0.4 OF A MILE TO  
 THE INTERSECTION OF FM  
 419 AND CR 423.

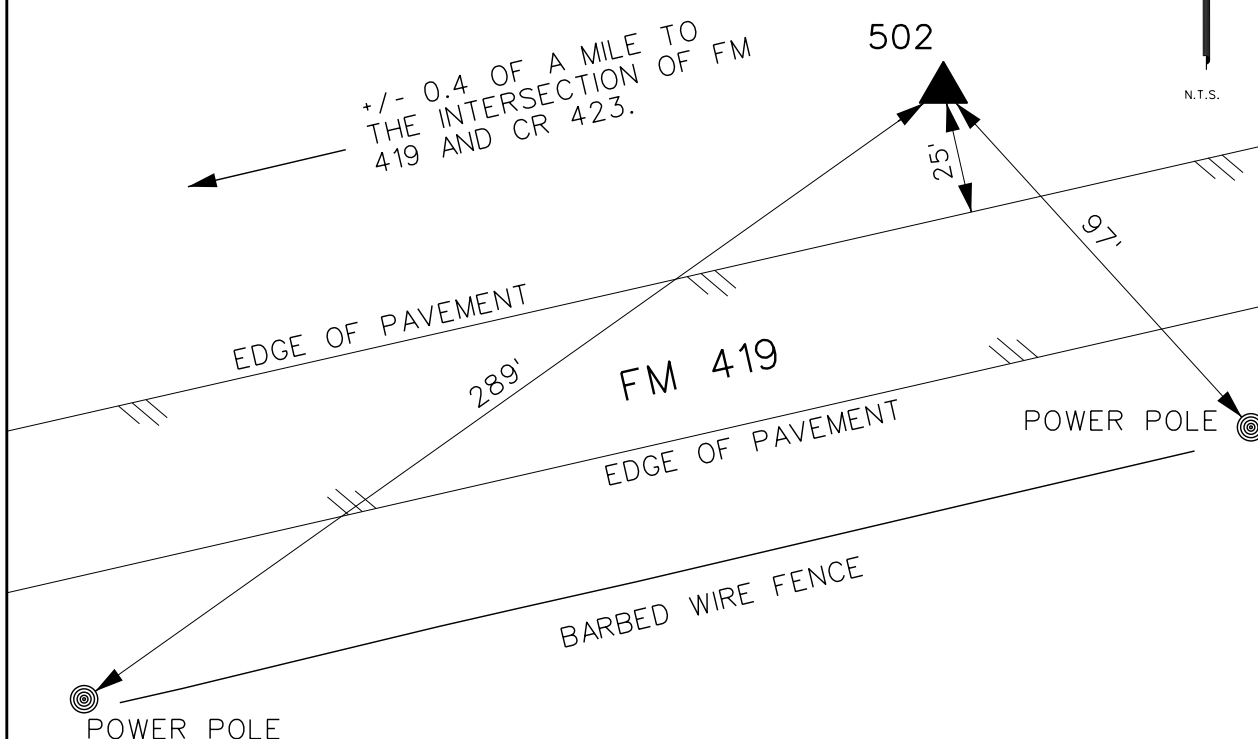

3 1/2" ALUMINUM DISK SET IN CONCRETE STAMPED "502", +/- 0.4 OF A MILE EAST OF THE INTERSECTION OF FM 419 AND CR 423, 25' NORTH OF THE NORTH EDGE OF PAVEMENT OF FM 419, 97' NORTHWEST OF A POWER POLE, AND 283' WEST OF ANOTHER POWER POLE.

NO.	DATE	REVISION	APPROVED

**SAM** Surveying and Mapping, LLC. (SAM)  
 1341 W. Mockingbird Lane, Suite 400W  
 Dallas, TX 75247 - (214) 631-7888  
 FIRM REGISTRATION NO. F-1937  
 TBPLS REGISTRATION NO. 10064301



Walter P Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

FM 419  
 SURVEY CONTROL  
 POINTS

SHEET 2 OF 2




FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.	
6	SEE TITLE SHEET	028	
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

\$/USER\$  
 \$TIMES\$  
 \$DATES\$  
 \$FILES\$

HORIZONTAL ALIGNMENT REPORT



Alignment name: FM419-ALIGN  
 Alignment description:  
 Report Created: Wednesday, March 15, 2023  
 Time: 4:18:45 PM



	STATION	X	Y
POT	431+82.650 R1	1368082.660	6936090.317
POT	437+82.651 R1	1367499.153	6935950.602
Tangential Direction:	S76°32'04.606"W		
Tangential Length:	600.001		

NO.	DATE	REVISION	APPROVED
			
			
			
<b>FM 419</b> <b>HORIZONTAL ALIGNMENT</b> <b>DATA SHEET</b>			
SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		028
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419


DATE: 7/25/2023 4:40:43 PM  
 FILE: c:\users\salsvador\dm\45813\FM419\_REM01.dgn

LEGEND

-  CULVERT REMOVAL
-  ASPHALT REMOVAL

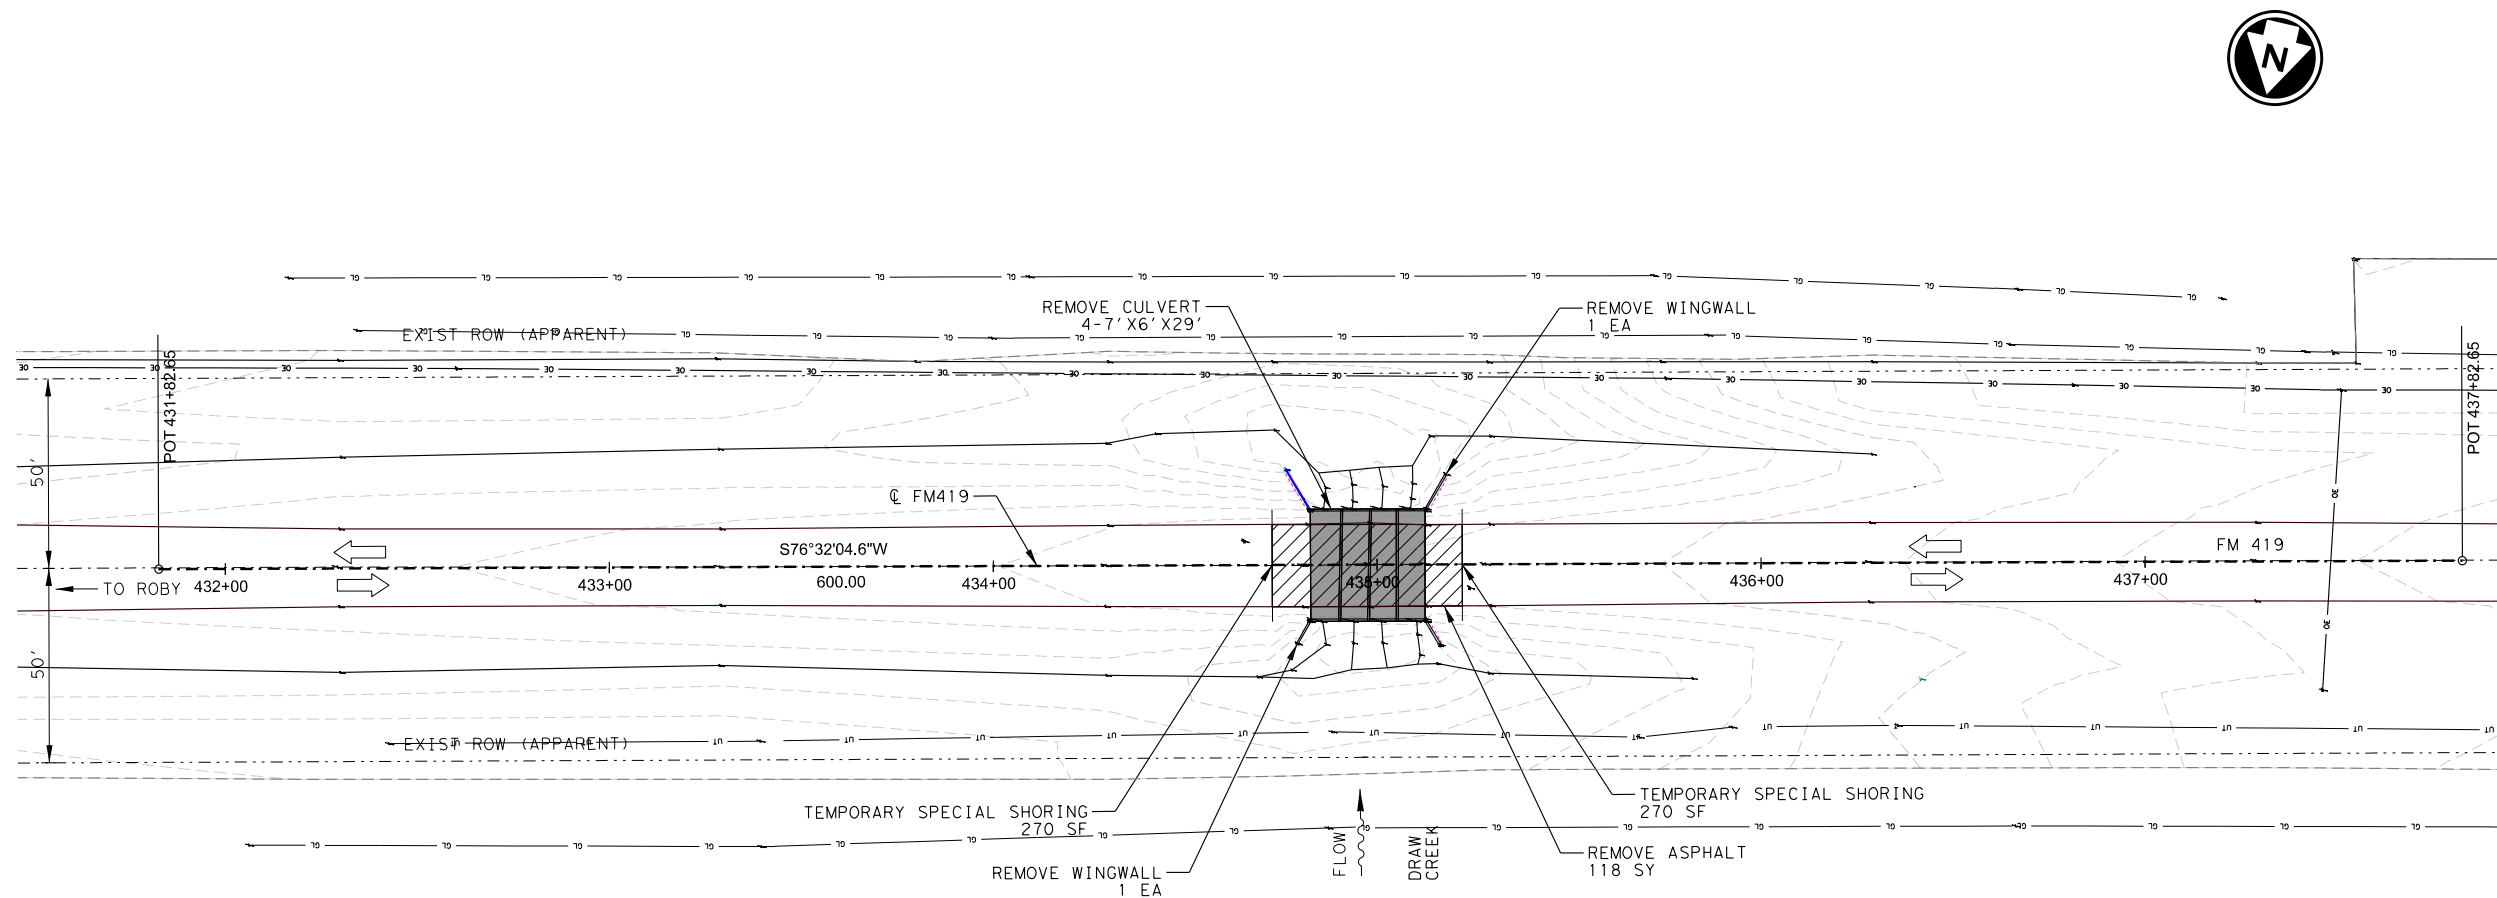

NO.	DATE	REVISION	APPROVED

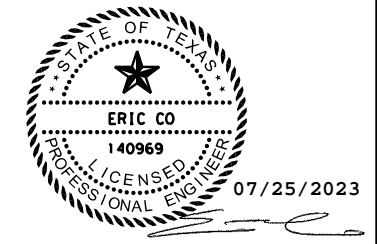


**walter p moore**  
 Walter P. Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

**FM 419  
 REMOVAL LAYOUT**


SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		029
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

DATE: 7/25/2023 5:57:47 PM  
 FILE: c:\users\erfc\appdata\local\bentley\projectwise\workingdir\wpm-pw-bentley.com\_wpm-pw-01\eco@waltermoore.com\dms45813\FM419\_RPP01.dgn

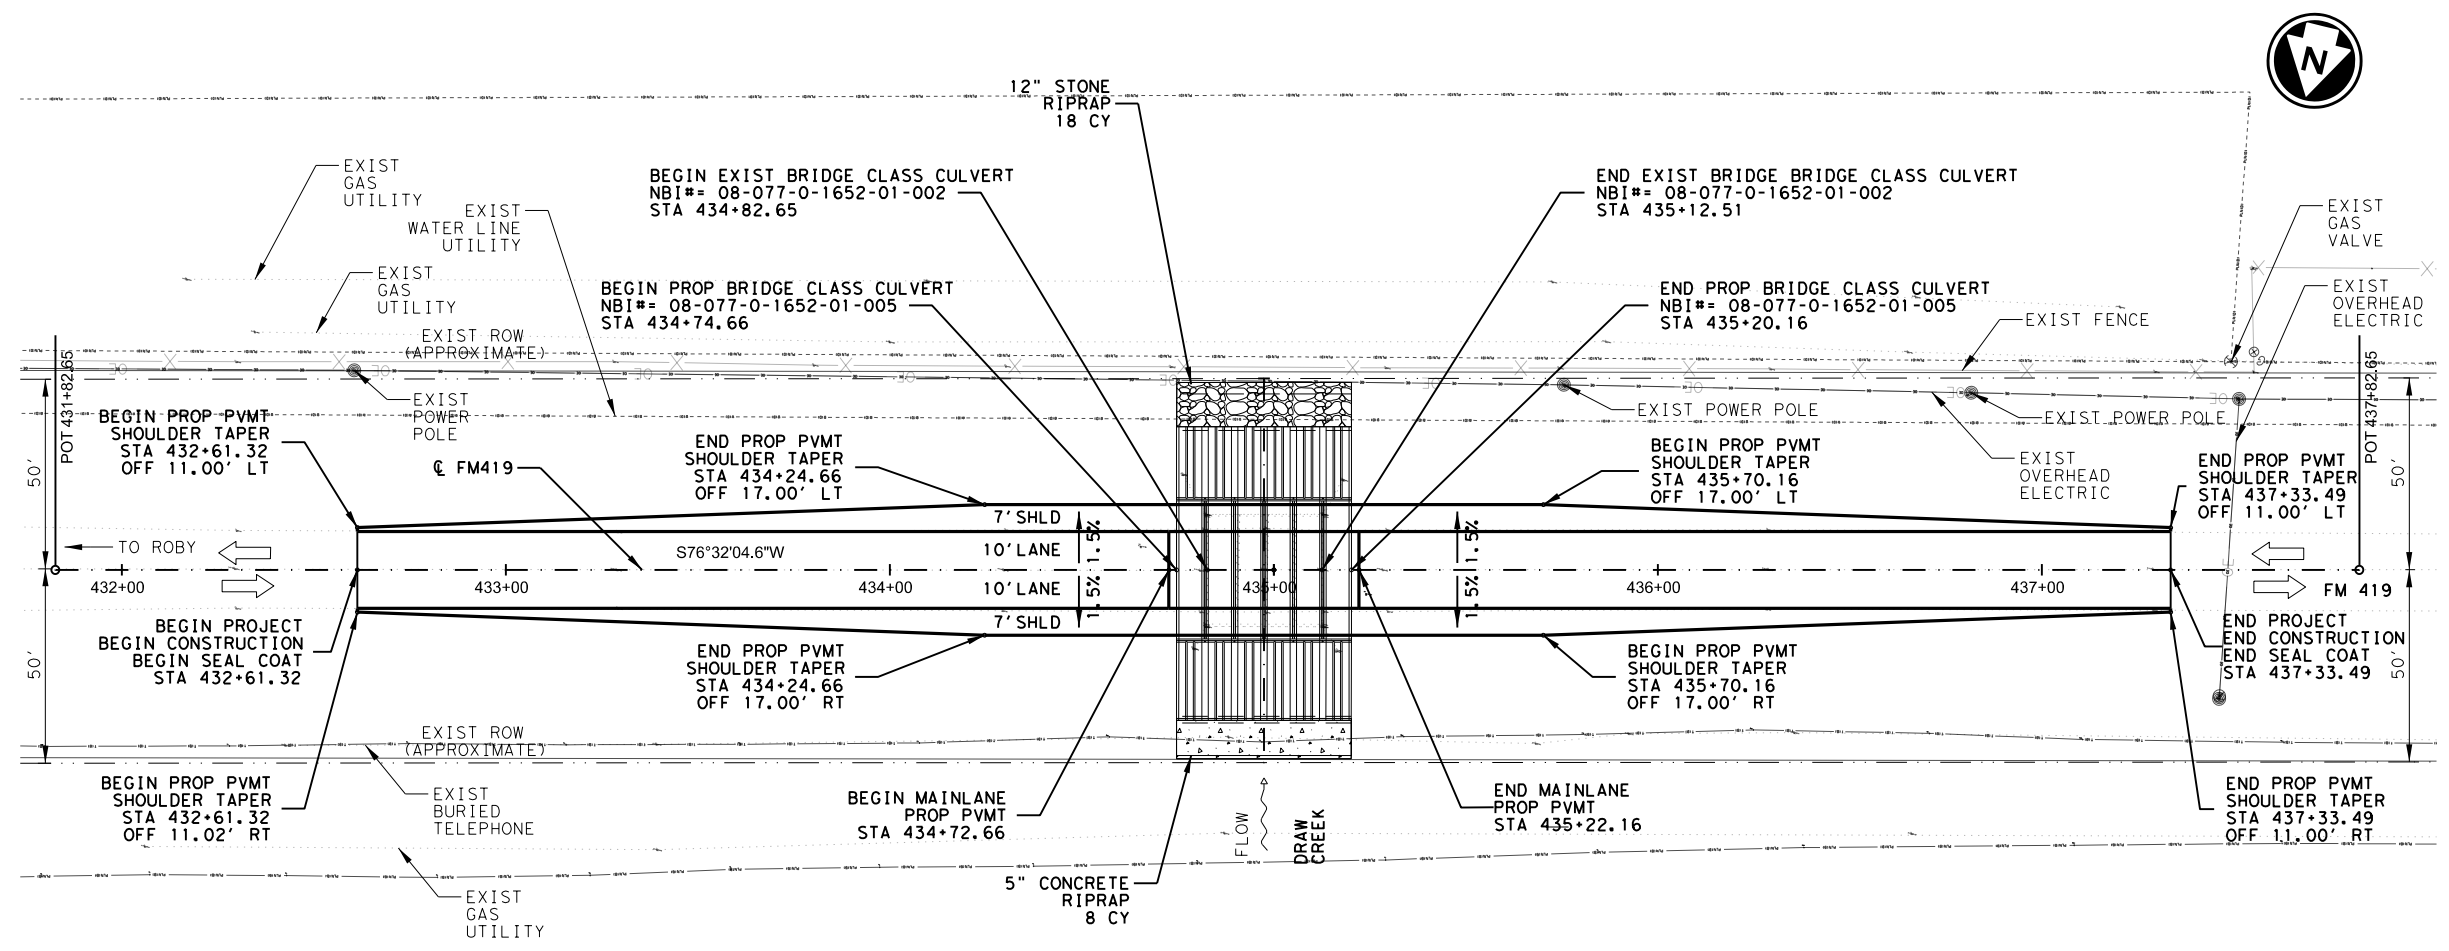


**LEGEND**

- STONE RIPRAP
- CONCRETE RIPRAP



NO.	DATE	REVISION	APPROVED

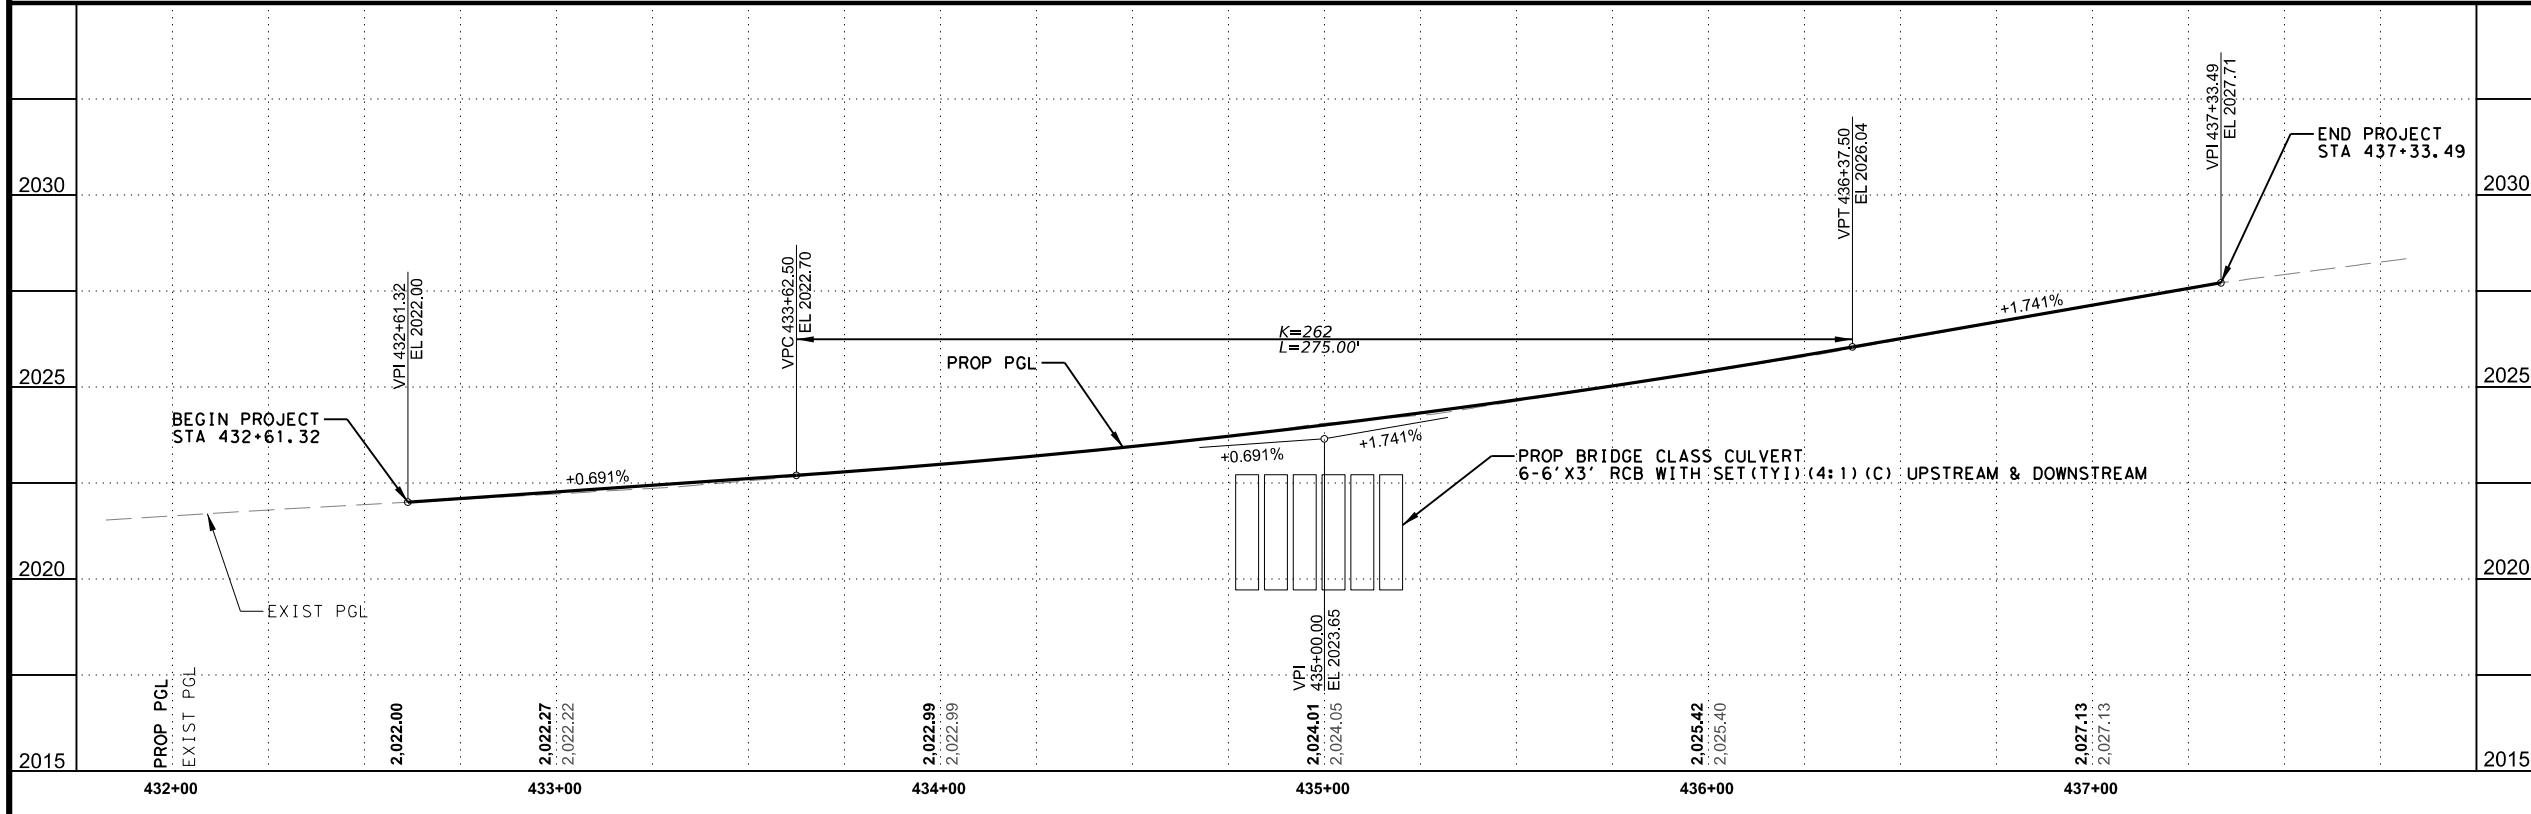

STATE OF TEXAS  
 ERIC CO  
 140969  
 LICENSED PROFESSIONAL ENGINEER  
 07/25/2023

Texas Department of Transportation  
 walter p moore  
 Walter P. Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856


**FM 419  
 ROADWAY  
 PLAN AND PROFILE**

SHEET 1 OF 1

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6	SEE TITLE SHEET	030


STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD#
1652	01	015	FM 419

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

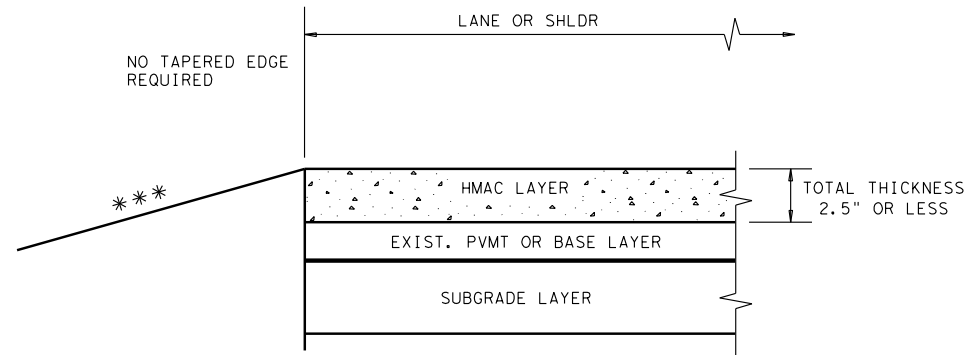

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS


**CONDITION - 1**  
THIN HMAC SURFACES OR HMAC OVERLAY  
WITH THICKNESS OF 2.5" OR LESS

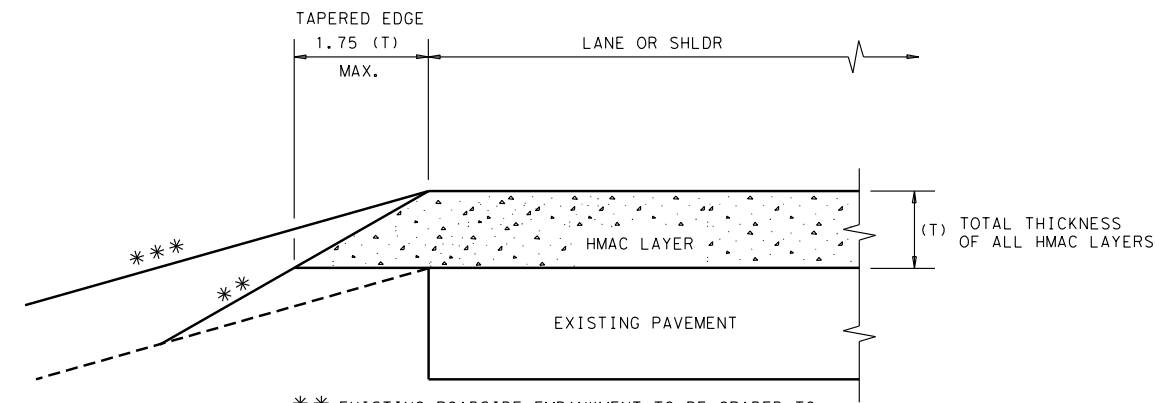

\*\* EXISTING ROADSIDE EMBANKMENT TO BE GRADED TO PRODUCE A SMOOTH LEVEL SURFACE FOR PLACEMENT OF TAPERED EDGE. THIS WORK IS SUBSIDIARY TO THE VARIOUS BID ITEMS.


\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 2**  
OVERLAY OF EXISTING PAVEMENT  
HMAC THICKNESS 2.5" TO 5"

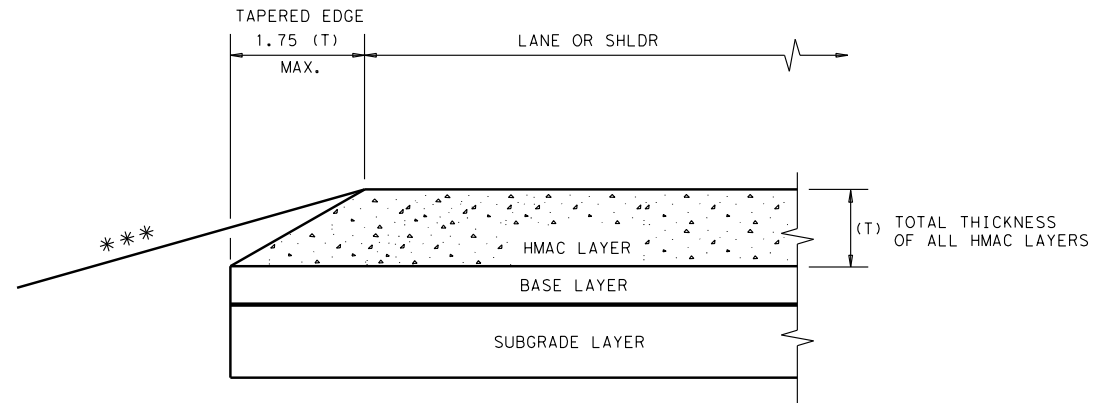

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 3**  
NEW OR RECONSTRUCTED PAVEMENT  
HMAC THICKNESS 2.5" TO 5"

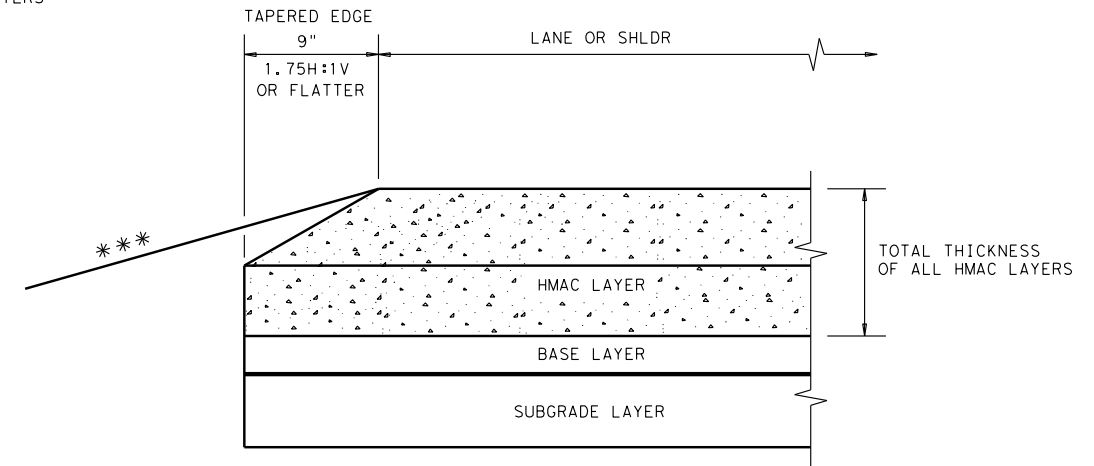

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 4**  
NEW OR RECONSTRUCTED PAVEMENT  
HMAC THICKNESS 5" OR GREATER

**GENERAL NOTES**

1. UNLESS OTHERWISE SHOWN IN THE PLANS, A VERTICAL EDGE IS PERMISSIBLE FOR HMAC PLACED GREATER THAN 5" BELOW THE EDGE OF PAVEMENT AND FOR THICKNESS OF HMAC LESS THAN 2.5".
2. FOR FURTHER INFORMATION REGARDING THE ROADSIDE AND PAVEMENT DETAILS, SEE TYPICAL SECTIONS.
3. PAYMENT FOR TAPERED EDGE WILL BE IN ACCORDANCE WITH APPLICABLE ITEMS IN THE CONTRACT.
4. THE SLOPE OF THE TAPERED EDGE SHALL BE 1.75H:1V OR FLATTER.
5. THE TAPERED EDGE SHALL BE PRODUCED BY USE OF A SCREED ATTACHMENT CAPABLE OF PRODUCING A SMOOTH COMPACTED SURFACE. ADDITIONAL COMPACTING EFFORT BEHIND THE SCREED IS NOT REQUIRED.


(NOT TO SCALE)

				<b>Design Division Standard</b>	
<b>TAPERED EDGE DETAILS HMAC PAVEMENT</b>					
<b>TE (HMAC) - 11</b>					
FILE: tehmac11.dgn	DN: TxDOT	CK: RL	DW: KB	CK:	
© TxDOT January 2011	CONT	SECT	JOB	HIGHWAY	
REVISIONS	1652	01	015	FM 419	
	DIST	COUNTY			SHEET NO.
	ABL	FISHER			031


DATE:  
FILE:



\_USERNAME\_ 2:41:54 PM  
 6/30/2023  
 Z:\7093\01\04\_CADD\dgn\Draw\_Creek\02\_Sheets\Draw\_Creek\_Drainage\_Area\_Map.dgn  
 ...04\_CADD\plctfg\pdf-bw.plctfg

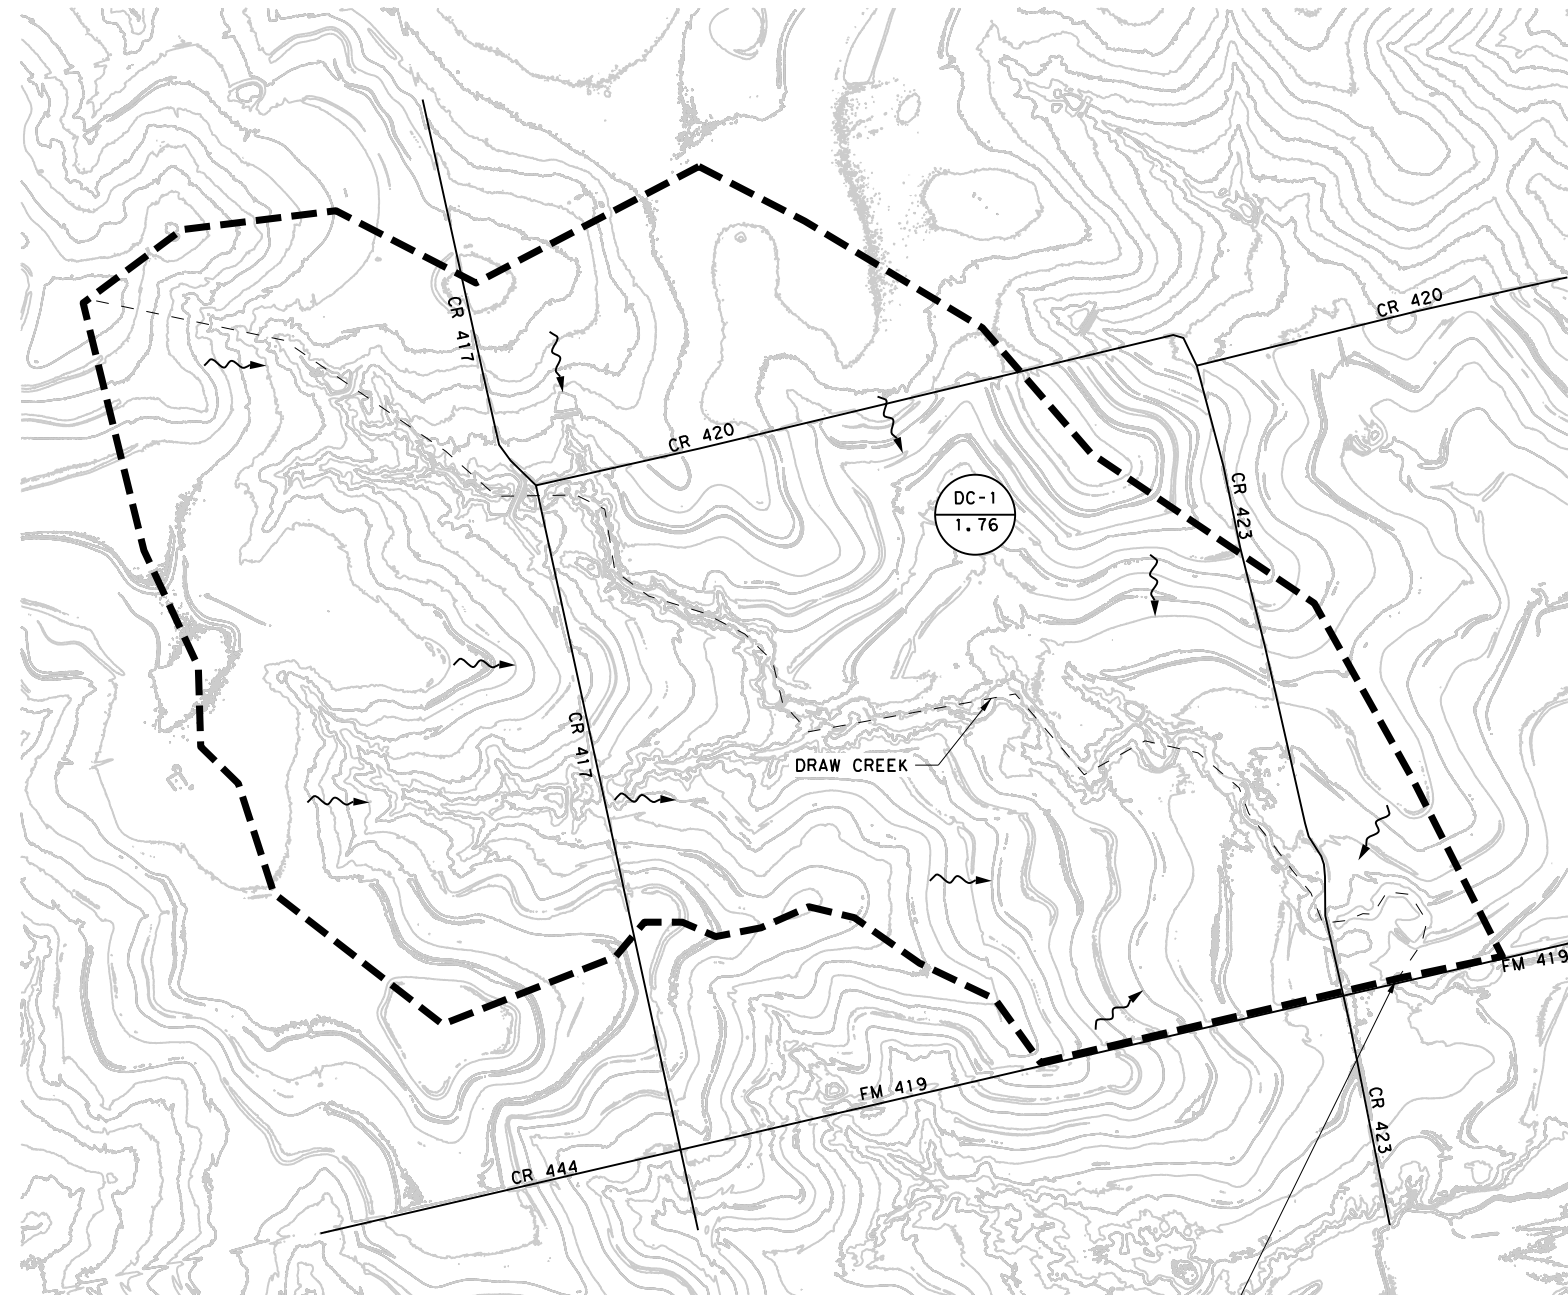

FM 419 CULVERT  
 EXIST 4-7' X 6' RCB  
 TO BE REPLACED WITH  
 PROP 6-6' X 3' RCB



- DRAINAGE AREA ID  
DRAINAGE AREA (SQ. MI)
- DRAINAGE AREA BOUNDARY
- FLOW DIRECTION
- ROADS
- EXISTING CONTOURS
- STREAM CENTERLINE

NOTES:

1. RUNOFF COMPUTATIONS PERFORMED WITH HEC-HMS 4.10 AND VERIFIED BY OMEGA EM REGRESSION ANALYSIS.
2. RAINFALL DEPTHS WERE OBTAINED FROM NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION (NOAA) ATLAS 14, VOLUME 11.
3. STORMS WERE MODELED AS 24-HOUR DURATION EVENTS USING TEMPORAL DISTRIBUTION.
4. RUNOFF VOLUME WAS COMPUTED USING THE SCS CURVE NUMBER LOSS MODEL.
5. TIME OF CONCENTRATION (TC) WAS COMPUTED USING NRCS METHOD.
6. TOPOGRAPHIC ELEVATION DATA WAS OBTAINED FROM TNRS USING THE FEMA UPPER CREEK FORK BRAZOS RIVER 2014, DEM, LIDAR (70 CENTIMETER)

DRAINAGE AREA ID	AREA (SQMI)	CURVE NUMBER	TIME OF CONCENTRATION (MIN)	LAG TIME (MIN)
DC-1	1.76	60	92	55.2

HEC-HMS SCS METHOD	
DRAINAGE AREA	1.76 SQ. MI.
Q 2	95.40 CFS
Q 5	237.10 CFS
Q 10	398.70 CFS
Q 25	684.60 CFS
Q 50	940.50 CFS
Q 100	1236.40 CFS



*wanzhang*  
 06/30/2023




**FM 419 AT  
 DRAW CREEK  
 DRAINAGE AREA MAP**

SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		032
STATE	DIST.	COUNTY	
TEXAS	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419



\_USERNAME\_ 2:50:35 PM  
 6/30/2023  
 Z:\7093\01\04\_CADD\dgn\Draw\_Creek\_Hydraulic\_Data.dgn  
 ...04\_CADD\plctfg\pdf-bw.plctfg

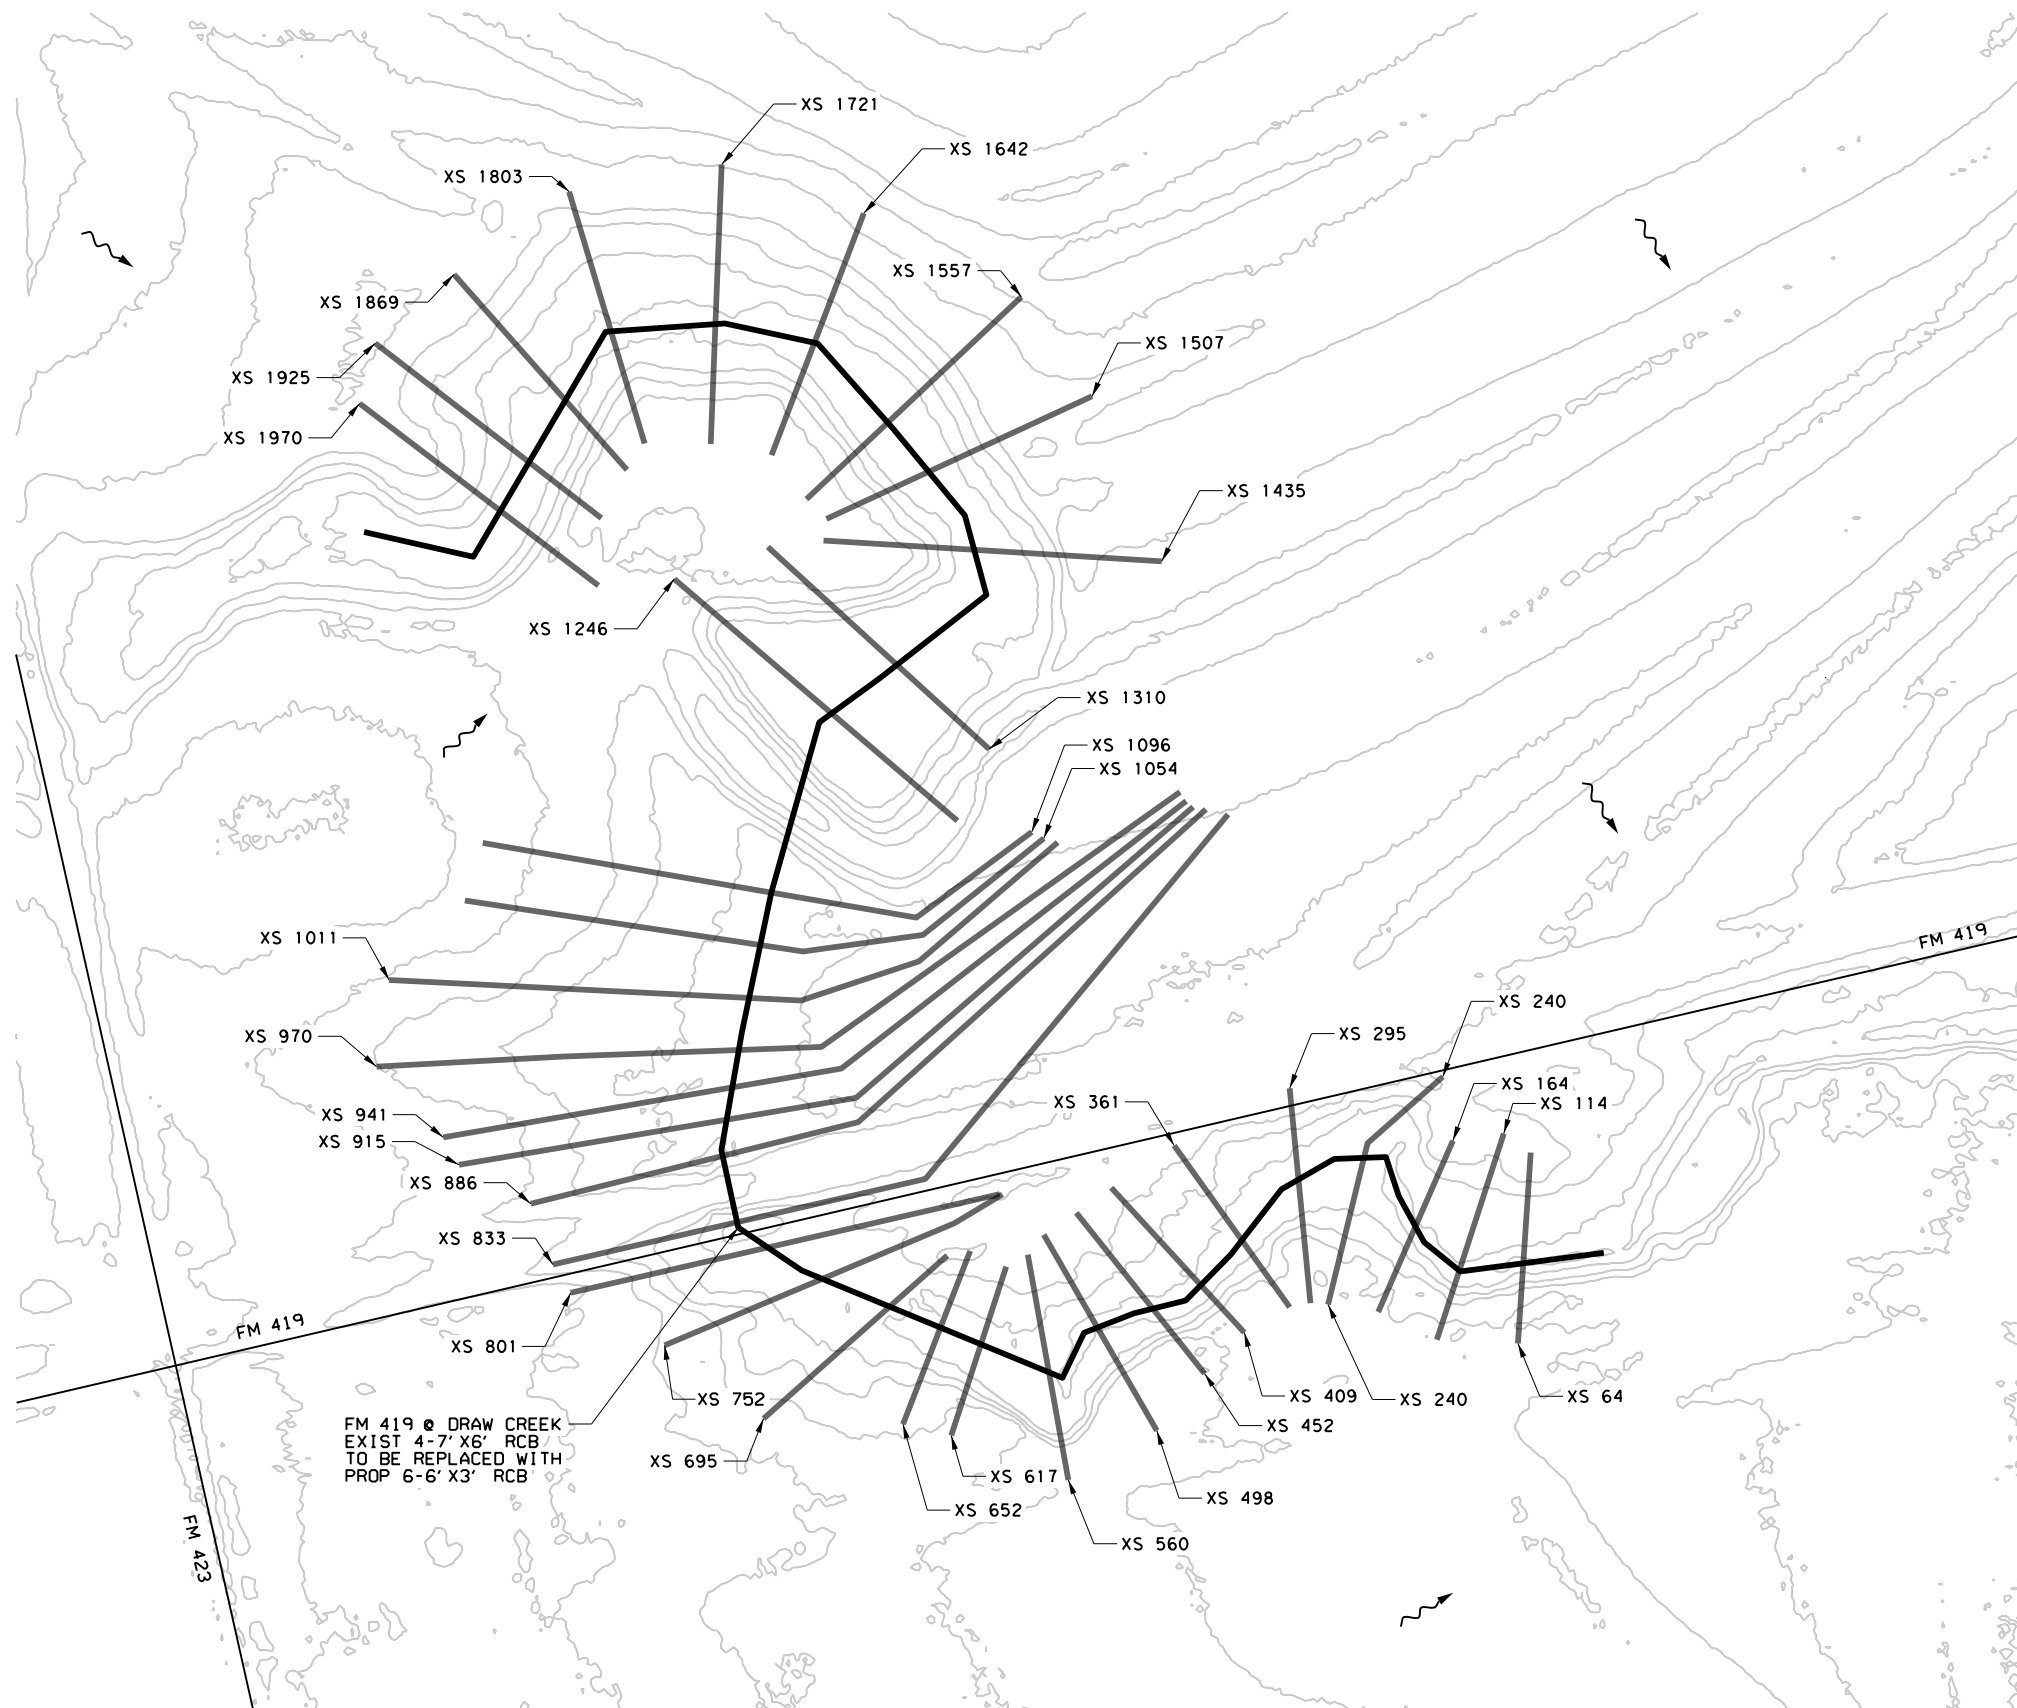


NOTES:

1. HEC-RAS VERSION 6.3.1 USED FOR THE ANALYSIS
2. ALL ELEVATIONS BASED ON THE NAVD88 VERTICAL DATUM.
3. THE NORMAL DEPTH OF 0.00739 FT/FT WAS USED AS THE DOWNSTREAM REACH BOUNDARY CONDITION.
4. FPA NOTIFICATION ALONG WITH PROJECT INFORMATION WAS SUBMITTED TO JOY DENNIS AT THE COUNTY JUDGE OFFICE OF FISHER COUNTY ON JUNE 30, 2023. NO FLOOD HAZARD AREAS ARE DESIGNATED BY FEMA ALONG DRAW CREEK WITHIN THE PROJECT LIMITS.



*wanzhang*  
 06/30/2023



**FM 419 AT  
 DRAW CREEK  
 HYDRAULIC DATA**


SHEET 1 OF 4			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		033
STATE	DIST.	COUNTY	
TEXAS	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

## HYDRAULIC MODEL RESULTS

HEC-RAS STATION	25-YEAR FLOW (CFS)	25-YEAR WSEL (FT)			25-YEAR VELOCITY (FT/S)		100-YEAR FLOW (CFS)	100-YEAR WSEL (FT)			100-YEAR VELOCITY (FT/S)	
		EXISTING	PROPOSED	DIFFERENCE	EXISTING	PROPOSED		EXISTING	PROPOSED	DIFFERENCE	EXISTING	PROPOSED
1970	684.6	2025.24	2025.24	0.00	3.11	3.11	1236.4	2026.23	2026.23	0.00	4.12	4.12
1925	684.6	2025.21	2025.21	0.00	2.71	2.71	1236.4	2026.22	2026.22	0.00	3.39	3.39
1869	684.6	2025.14	2025.14	0.00	2.75	2.75	1236.4	2026.13	2026.13	0.00	3.52	3.53
1803	684.6	2025.02	2025.02	0.00	3.08	3.08	1236.4	2026.01	2026.01	0.00	3.75	3.75
1721	684.6	2024.79	2024.79	0.00	3.54	3.54	1236.4	2025.78	2025.78	0.00	4.16	4.16
1642	684.6	2024.50	2024.50	0.00	3.98	3.98	1236.4	2025.41	2025.41	0.00	4.98	4.98
1557	684.6	2024.34	2024.34	0.00	3.37	3.37	1236.4	2025.22	2025.22	0.00	4.41	4.41
1507	684.6	2024.14	2024.14	0.00	4.02	4.01	1236.4	2024.89	2024.89	0.00	5.42	5.43
1435	684.6	2023.83	2023.83	0.00	4.40	4.40	1236.4	2024.38	2024.38	0.00	6.12	6.13
1310	684.6	2023.74	2023.74	0.00	2.34	2.34	1236.4	2024.29	2024.28	-0.01	3.39	3.39
1246	684.6	2023.74	2023.74	0.00	1.48	1.48	1236.4	2024.30	2024.29	-0.01	2.14	2.15
1096	684.6	2023.53	2023.53	0.00	2.71	2.71	1236.4	2023.96	2023.95	-0.01	3.68	3.71
1054	684.6	2023.46	2023.46	0.00	2.45	2.45	1236.4	2023.89	2023.87	-0.02	3.26	3.29
1011	684.6	2023.29	2023.30	0.01	3.04	3.03	1236.4	2023.73	2023.70	-0.03	3.66	3.75
970	684.6	2023.14	2023.15	0.01	3.10	3.08	1236.4	2023.55	2023.49	-0.06	3.96	4.17
941	684.6	2022.96	2023.00	0.04	3.59	3.41	1236.4	2023.46	2023.35	-0.11	3.65	4.13
915	684.6	2022.71	2022.56	-0.15	4.26	5.17	1236.4	2023.40	2023.25	-0.15	3.35	4.01
886	684.6	2022.84	2022.45	-0.39	1.44	1.64	1236.4	2023.44	2023.32	-0.12	1.90	2.03
860		<b>FM 419 CULVERT CROSSING</b>										
833	684.6	2021.19	2021.19	0.00	1.89	1.89	1236.4	2022.04	2022.04	0.00	2.46	2.46
801	684.6	2020.98	2020.98	0.00	3.68	3.68	1236.4	2021.86	2021.86	0.00	3.76	3.76
752	684.6	2020.79	2020.79	0.00	3.51	3.51	1236.4	2021.67	2021.67	0.00	4.10	4.10
695	684.6	2020.39	2020.39	0.00	4.57	4.57	1236.4	2021.29	2021.29	0.00	5.23	5.23
652	684.6	2019.92	2019.92	0.00	5.42	5.42	1236.4	2020.67	2020.67	0.00	6.83	6.83
617	684.6	2019.42	2019.42	0.00	6.12	6.12	1236.4	2020.37	2020.37	0.00	6.76	6.76
560	684.6	2019.48	2019.48	0.00	2.94	2.94	1236.4	2020.51	2020.51	0.00	3.60	3.60
498	684.6	2018.95	2018.95	0.00	5.20	5.20	1236.4	2019.78	2019.78	0.00	6.60	6.60
452	684.6	2018.68	2018.68	0.00	4.80	4.80	1236.4	2019.48	2019.48	0.00	6.18	6.18
409	684.6	2018.34	2018.34	0.00	5.05	5.05	1236.4	2019.20	2019.20	0.00	6.11	6.11
361	684.6	2018.01	2018.01	0.00	4.84	4.84	1236.4	2018.89	2018.89	0.00	5.87	5.87
295	684.6	2017.44	2017.44	0.00	5.16	5.16	1236.4	2018.30	2018.30	0.00	6.27	6.27
240	684.6	2017.34	2017.34	0.00	3.14	3.14	1236.4	2018.35	2018.35	0.00	3.59	3.59
164	684.6	2016.83	2016.83	0.00	4.51	4.51	1236.4	2017.81	2017.81	0.00	5.30	5.30
114	684.6	2016.68	2016.68	0.00	3.86	3.86	1236.4	2017.70	2017.70	0.00	4.53	4.53
64	684.6	2016.17	2016.17	0.00	5.84	5.84	1236.4	2017.10	2017.10	0.00	6.90	6.90

**NOTES:**

1. HEC-RAS VERSION 6.3.1 USED FOR THE ANALYSIS
2. ALL ELEVATIONS BASED ON THE NAVD88 VERTICAL DATUM.
3. THE NORMAL DEPTH OF 0.00739 FT/FT WAS USED AS THE DOWNSTREAM REACH BOUNDARY CONDITION.
4. FPA NOTIFICATION ALONG WITH PROJECT INFORMATION WAS SUBMITTED TO JOY DENNIS AT THE COUNTY JUDGE OFFICE OF FISHER COUNTY ON JUNE 30, 2023. NO FLOOD HAZARD AREAS ARE DESIGNATED BY FEMA ALONG DRAW CREEK WITHIN THE PROJECT LIMITS.

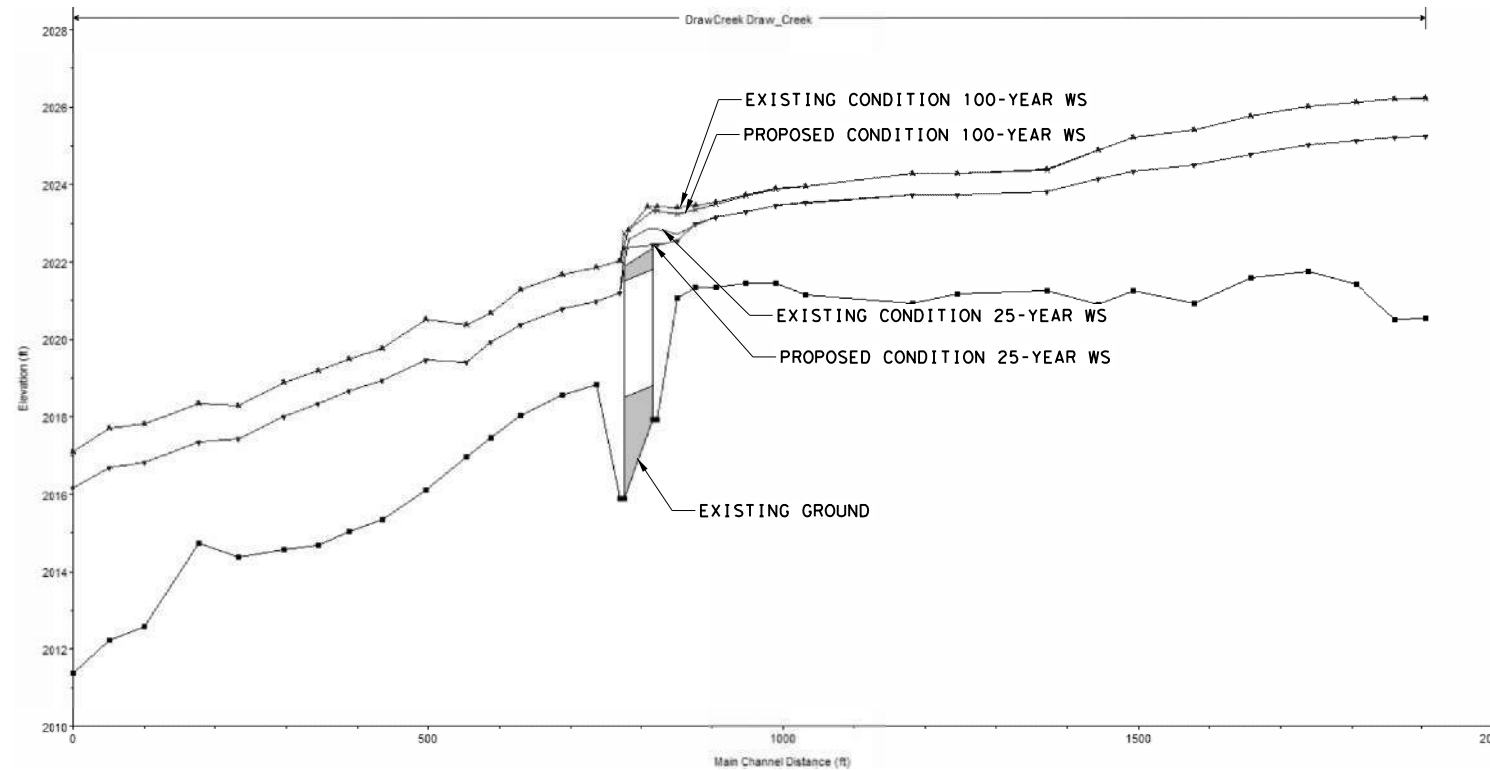


\_USERNAME\_ 2:52:14 PM  
 6/30/2023  
 Z:\7093\01\04\_CADD\dgn\Draw\_Creek\02\_Sheets\Draw\_Creek\_Hydraulic\_Data\_02.dgn  
 ...04\_CADD\picfig.pdf-bw.picfig




### FM 419 AT DRAW CREEK HYDRAULIC DATA

SHEET 2 OF 4			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.	
6	SEE TITLE SHEET	034	
STATE	DIST.	COUNTY	
TEXAS	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

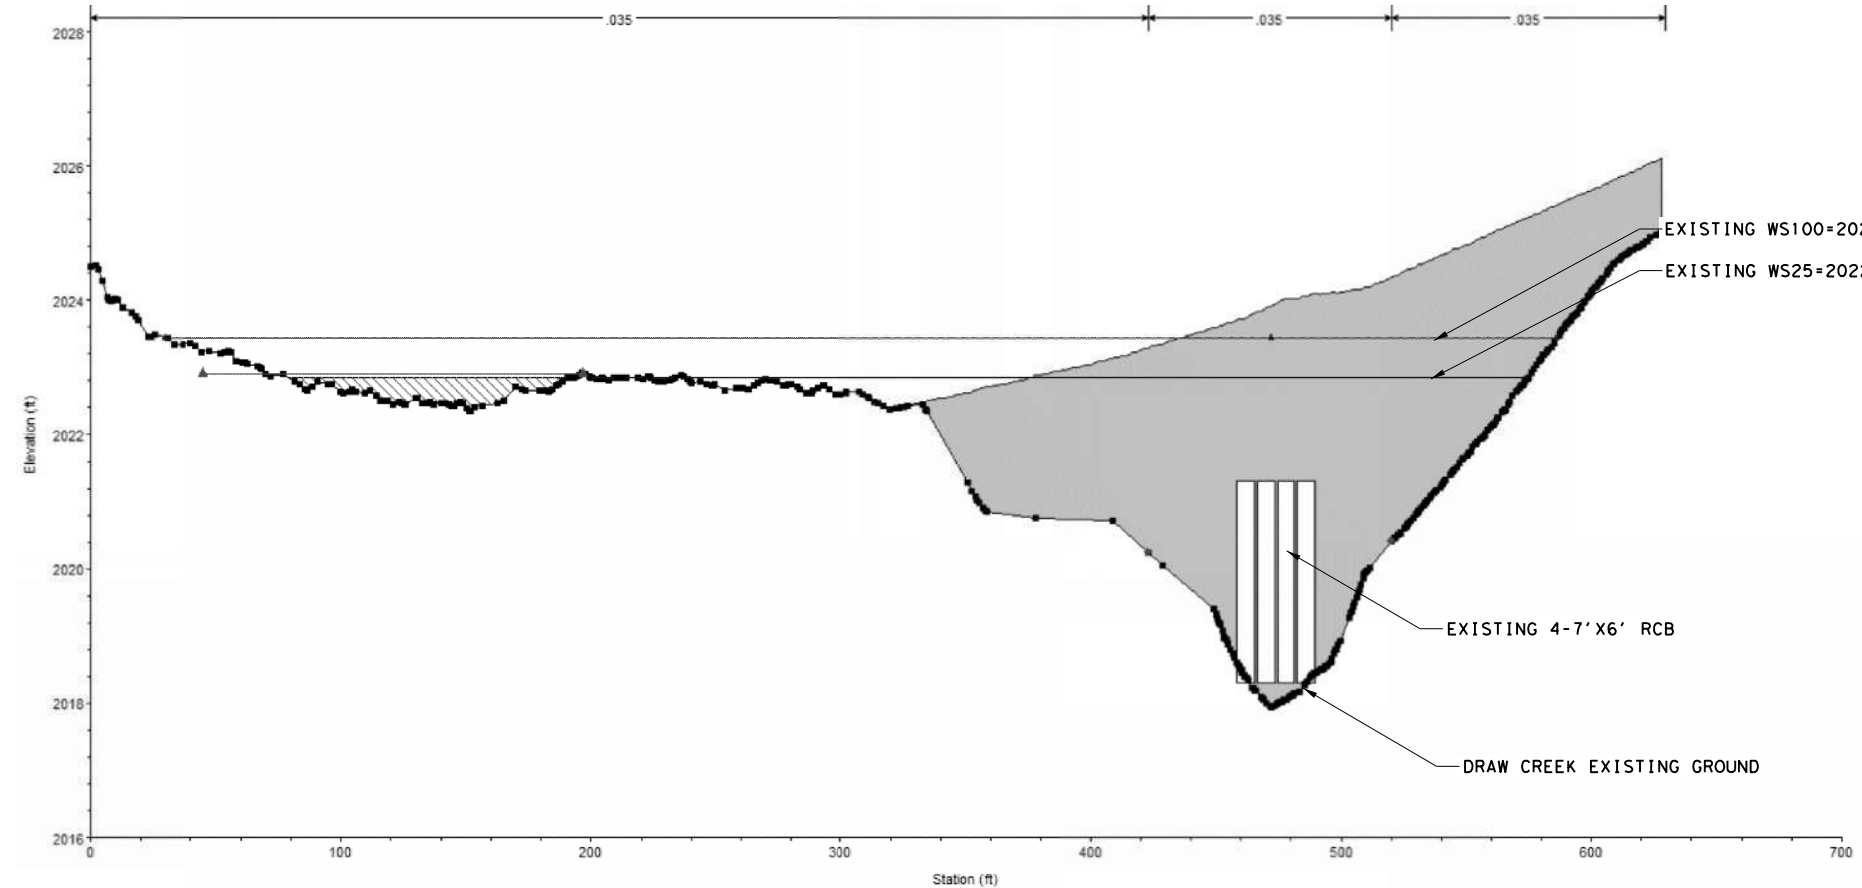

EXISTING FM 419 CULVERT CROSSING AT DRAW CREEK

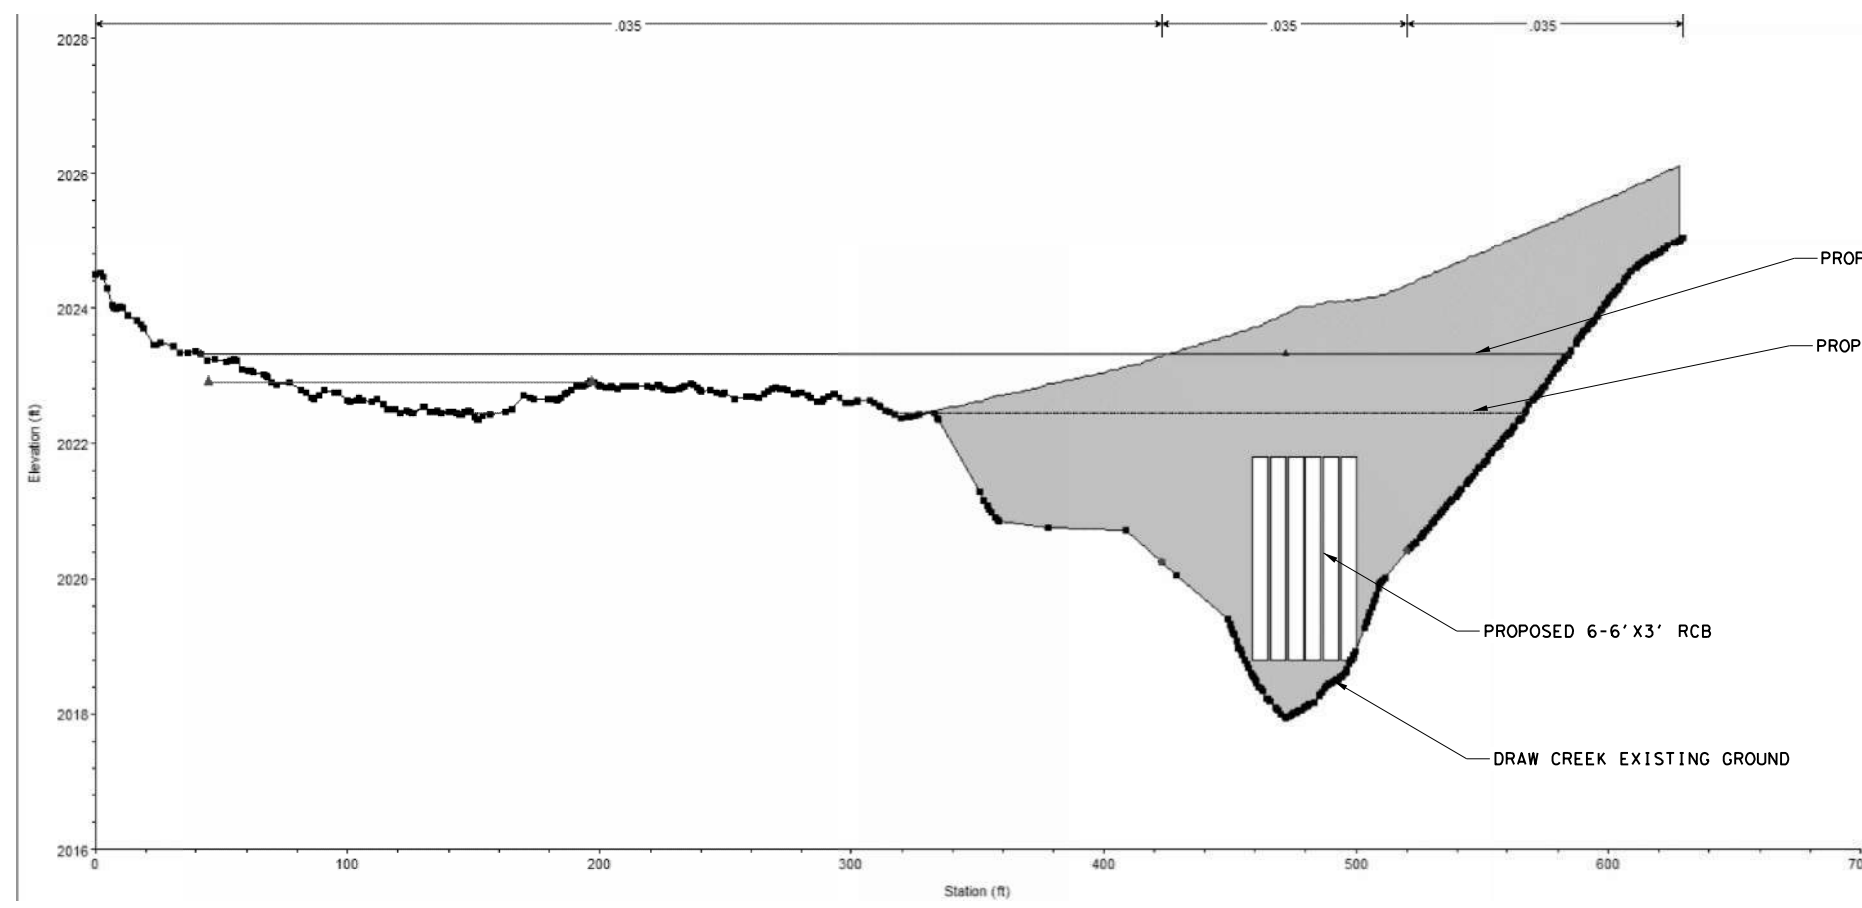

PROPOSED FM 419 CULVERT CROSSING AT DRAW CREEK

- NOTES:
1. HEC-RAS VERSION 6.3.1 USED FOR THE ANALYSIS
  2. ALL ELEVATIONS BASED ON THE NAVD88 VERTICAL DATUM.
  3. THE NORMAL DEPTH OF 0.00739 FT/FT WAS USED AS THE DOWNSTREAM REACH BOUNDARY CONDITION.
  4. FPA NOTIFICATION ALONG WITH PROJECT INFORMATION WAS SUBMITTED TO JOY DENNIS AT THE COUNTY JUDGE OFFICE OF FISHER COUNTY ON JUNE 30, 2023. NO FLOOD HAZARD AREAS ARE DESIGNATED BY FEMA ALONG DRAW CREEK WITHIN THE PROJECT LIMITS.

\_USERNAME\_ 2:53:35 PM  
 6/30/2023  
 Z:\7093\01\04\_CADD\dgn\Draw\_Creek\Draw\_Creek\_Hydraulic\_Data\_03.dgn  
 ...04\_CADD\picfig.pdf-bw.picfig



<b>FM 419 AT DRAW CREEK HYDRAULIC DATA</b>			
SHEET 3 OF 4			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		035
STATE	DIST.	COUNTY	
TEXAS	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

HEC-RAS OUTPUT FOR THE U/S AND D/S FACES  
INSIDE THE PROPOSED CULVERT STRUCTURES

PLAN: PROP DRAW CREEK RS:860 PROFILE: 25 YEAR				PLAN: PROP DRAW CREEK RS:860 PROFILE: 100 YEAR			
Q CULV GROUP (CFS)	683.95	CULV FULL LEN (FT)		Q CULV GROUP (CFS)	724.79	CULV FULL LEN (FT)	40.00
# BARRELS	6	CULV VEL US (FT/S)	8.49	# BARRELS	6	CULV VEL US (FT/S)	6.71
Q BARREL (CFS)	113.99	CULV VEL DS (FT/S)	7.05	Q BARREL (CFS)	120.80	CULV VEL DS (FT/S)	6.71
E.G. US. (FT)	2022.49	CULV INV EL UP (FT)	2018.80	E.G. US. (FT)	2023.37	CULV INV EL UP (FT)	2018.80
W.S. US. (FT)	2022.45	CULV INV EL DN (FT)	2018.50	W.S. US. (FT)	2023.32	CULV INV EL DN (FT)	2018.50
E.G. DS (FT)	2021.24	CULV FRCTN LS (FT)	0.19	E.G. DS (FT)	2022.11	CULV FRCTN LS (FT)	0.14
W.S. DS (FT)	2021.19	CULV EXIT LOSS (FT)	0.72	W.S. DS (FT)	2022.04	CULV EXIT LOSS (FT)	0.62
DELTA EG (FT)	1.25	CULV ENTR LOSS (FT)	0.33	DELTA EG (FT)	1.25	CULV ENTR LOSS (FT)	0.49
DELTA WS (FT)	1.26	Q WEIR (CFS)	0.65	DELTA WS (FT)	1.28	Q WEIR (CFS)	511.61
E.G. IC (FT)	2022.49	WEIR STA LFT (FT)	314.43	E.G. IC (FT)	2023.28	WEIR STA LFT (FT)	32.11
E.G. OC (FT)	2022.53	WEIR STA RGT (FT)	332.09	E.G. OC (FT)	2023.37	WEIR STA RGT (FT)	429.97
CULVERT CONTROL	INLET	WEIR SUBMERG	0.00	CULVERT CONTROL	OUTLET	WEIR SUBMERG	0.00
CULV WS INLET (FT)	2021.04	WEIR MAX DEPTH (FT)	0.11	CULV WS INLET (FT)	2021.80	WEIR MAX DEPTH (FT)	1.02
CULV WS OUTLET (FT)	2021.19	WEIR AVG DEPTH (FT)	0.05	CULV WS OUTLET (FT)	2021.50	WEIR AVG DEPTH (FT)	0.60
CULV NML DEPTH (FT)	1.78	WEIR FLOW AREA (SQ FT)	0.96	CULV NML DEPTH (FT)		WEIR FLOW AREA (SQ FT)	237.88
CULV CRT DEPTH (FT)	2.24	MIN EL WEIR FLOW (FT)	2022.38	CULV CRT DEPTH (FT)	2.33	MIN EL WEIR FLOW (FT)	2022.38


NOTES:

1. HEC-RAS VERSION 6.3.1 USED FOR THE ANALYSIS
2. ALL ELEVATIONS BASED ON THE NAVD88 VERTICAL DATUM.
3. THE NORMAL DEPTH OF 0.00739 FT/FT WAS USED AS THE DOWNSTREAM REACH BOUNDARY CONDITION.
4. FPA NOTIFICATION ALONG WITH PROJECT INFORMATION WAS SUBMITTED TO JOY DENNIS AT THE COUNTY JUDGE OFFICE OF FISHER COUNTY ON JUNE 30, 2023. NO FLOOD HAZARD AREAS ARE DESIGNATED BY FEMA ALONG DRAW CREEK WITHIN THE PROJECT LIMITS.

\_USERNAME\_ 2:54:40 PM  
 6/30/2023  
 Z:\7093\01\04\_CADD\dgn\Draw\_Creek\_Hydraulic\_Data\_04.dgn  
 ...04\_CADD\plctfg.pdf-bw.plctfg



*wanzhang*  
06/30/2023





**FM 419 AT  
DRAW CREEK  
HYDRAULIC DATA**


SHEET 4 OF 4

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.	
6	SEE TITLE SHEET	036	
STATE	DIST.	COUNTY	
TEXAS	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

DATE: 7/26/2023 10:54:45 PM  
 FILE: c:\users\erick\appdata\local\bentley\project\wise\working\wpm-pw-bentley.com\_wpm-pw-01\eco@waltermoore.com\dms45825\FM419\_CUL01.dgn

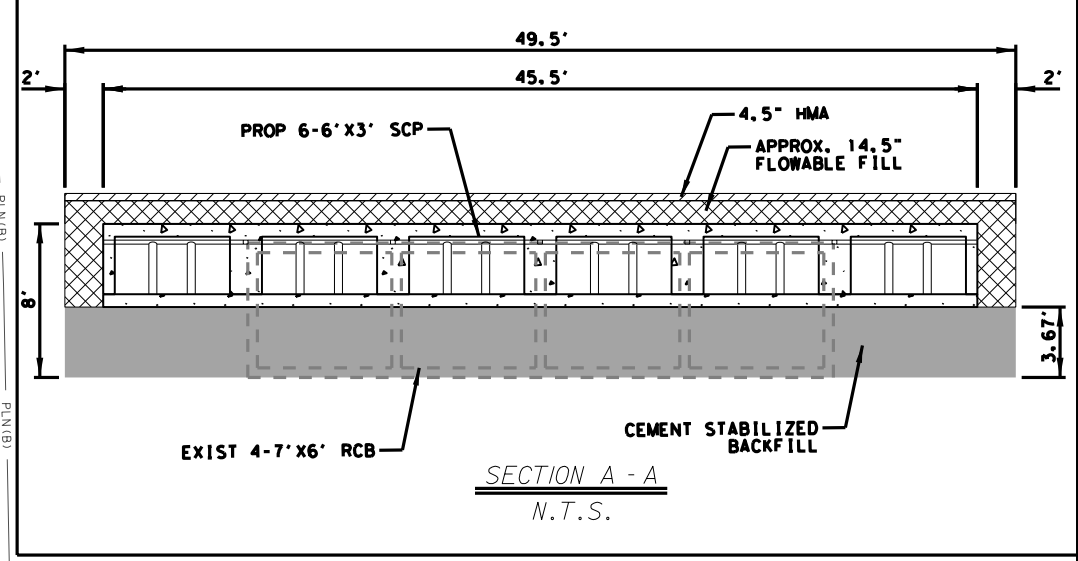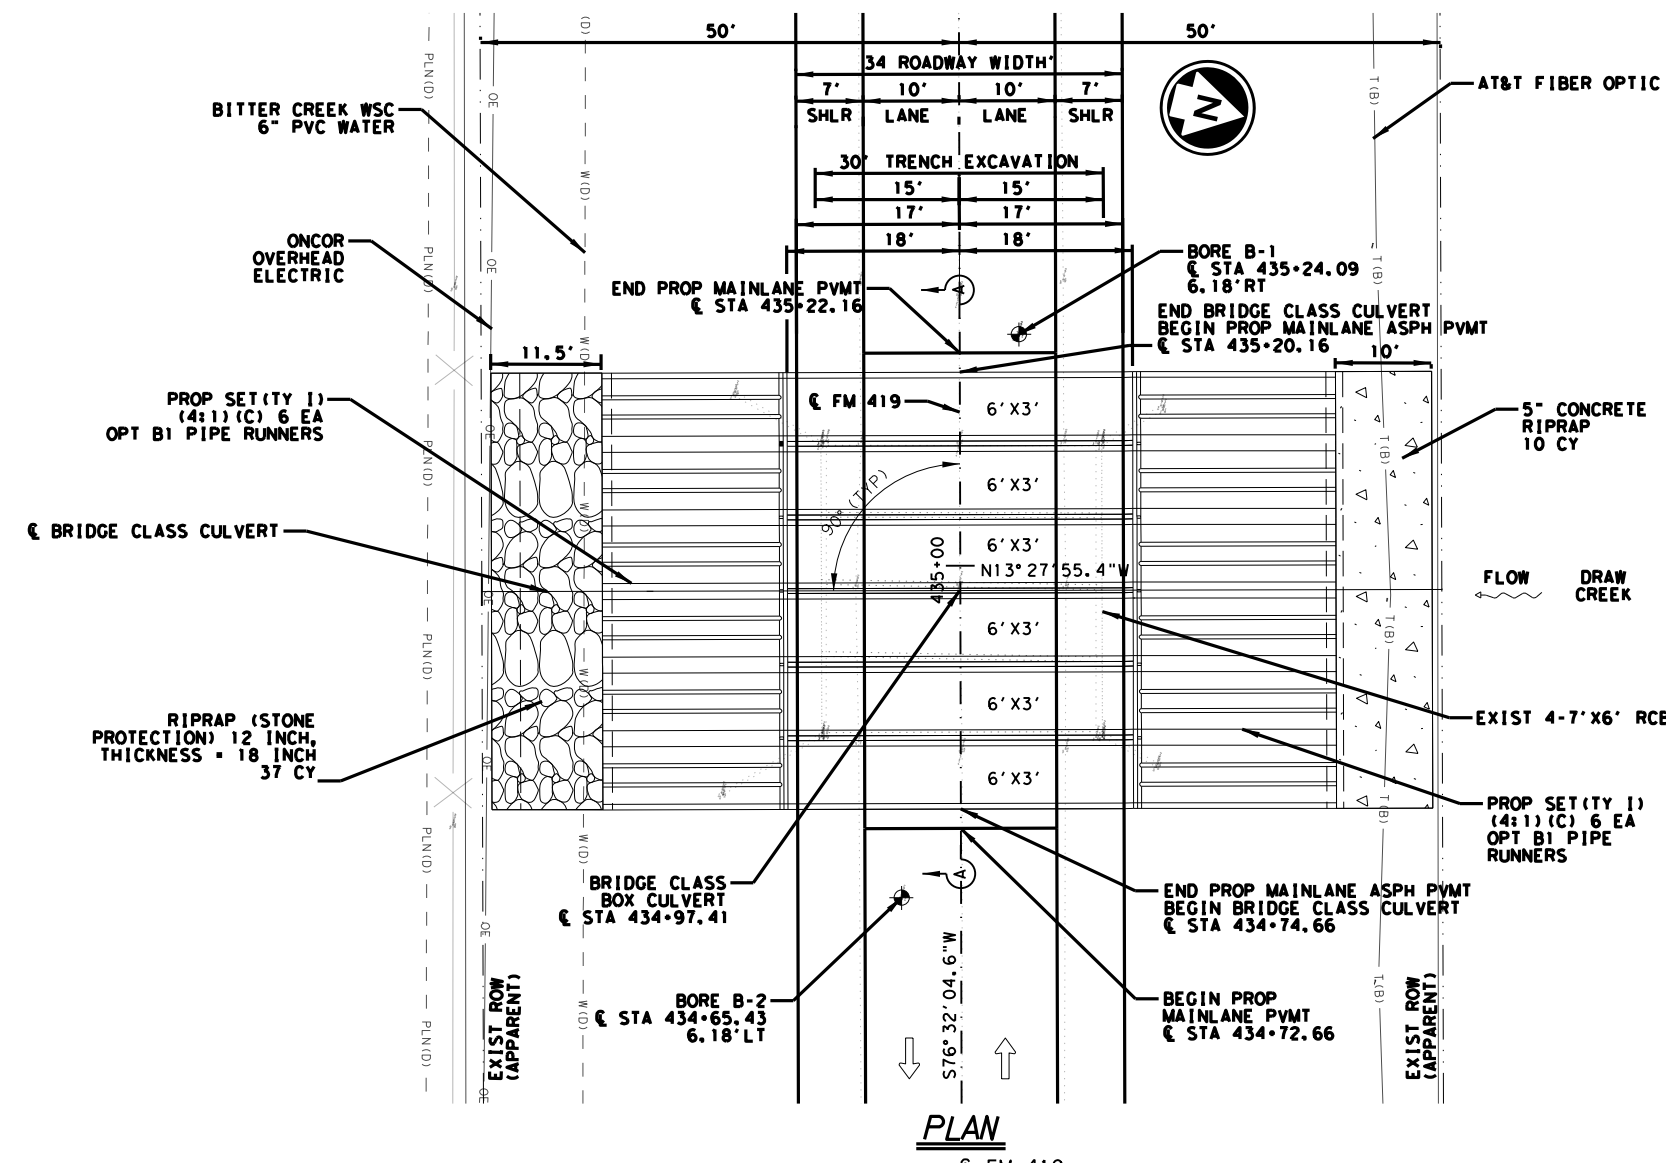


400	400	401	432	432	462	467
STRUCT EXCAV (BOX)	CEM STABIL BKFL	FLOWABLE BACKFILL	RIPRAP (CONC) (5 IN)	RIPRAP (STONE PROTECTI ON) (12 IN)	CONC BOX CULV (6 FT X 3 FT)	SET (TY I) (S= 6 FT) (HW= 5 FT) (4:1) (C)
CY	CY	CY	CY	CY	LF	EA
232	381	99	10	37	216	12




DESIGN SPEED: 50 MPH  
 CURRENT A.D.T. (2021) = 66 VPD  
 PROJECTED A.D.T. (2041) = 92 VPD  
 FUNCTIONAL CLASSIFICATION = RURAL MAJOR COLLECTOR  
 EXISTING NBI#: 08-077-0-1652-01-002  
 PROPOSED NBI#: 08-077-0-1652-01-005

NO.	DATE	REVISION	APPROVED

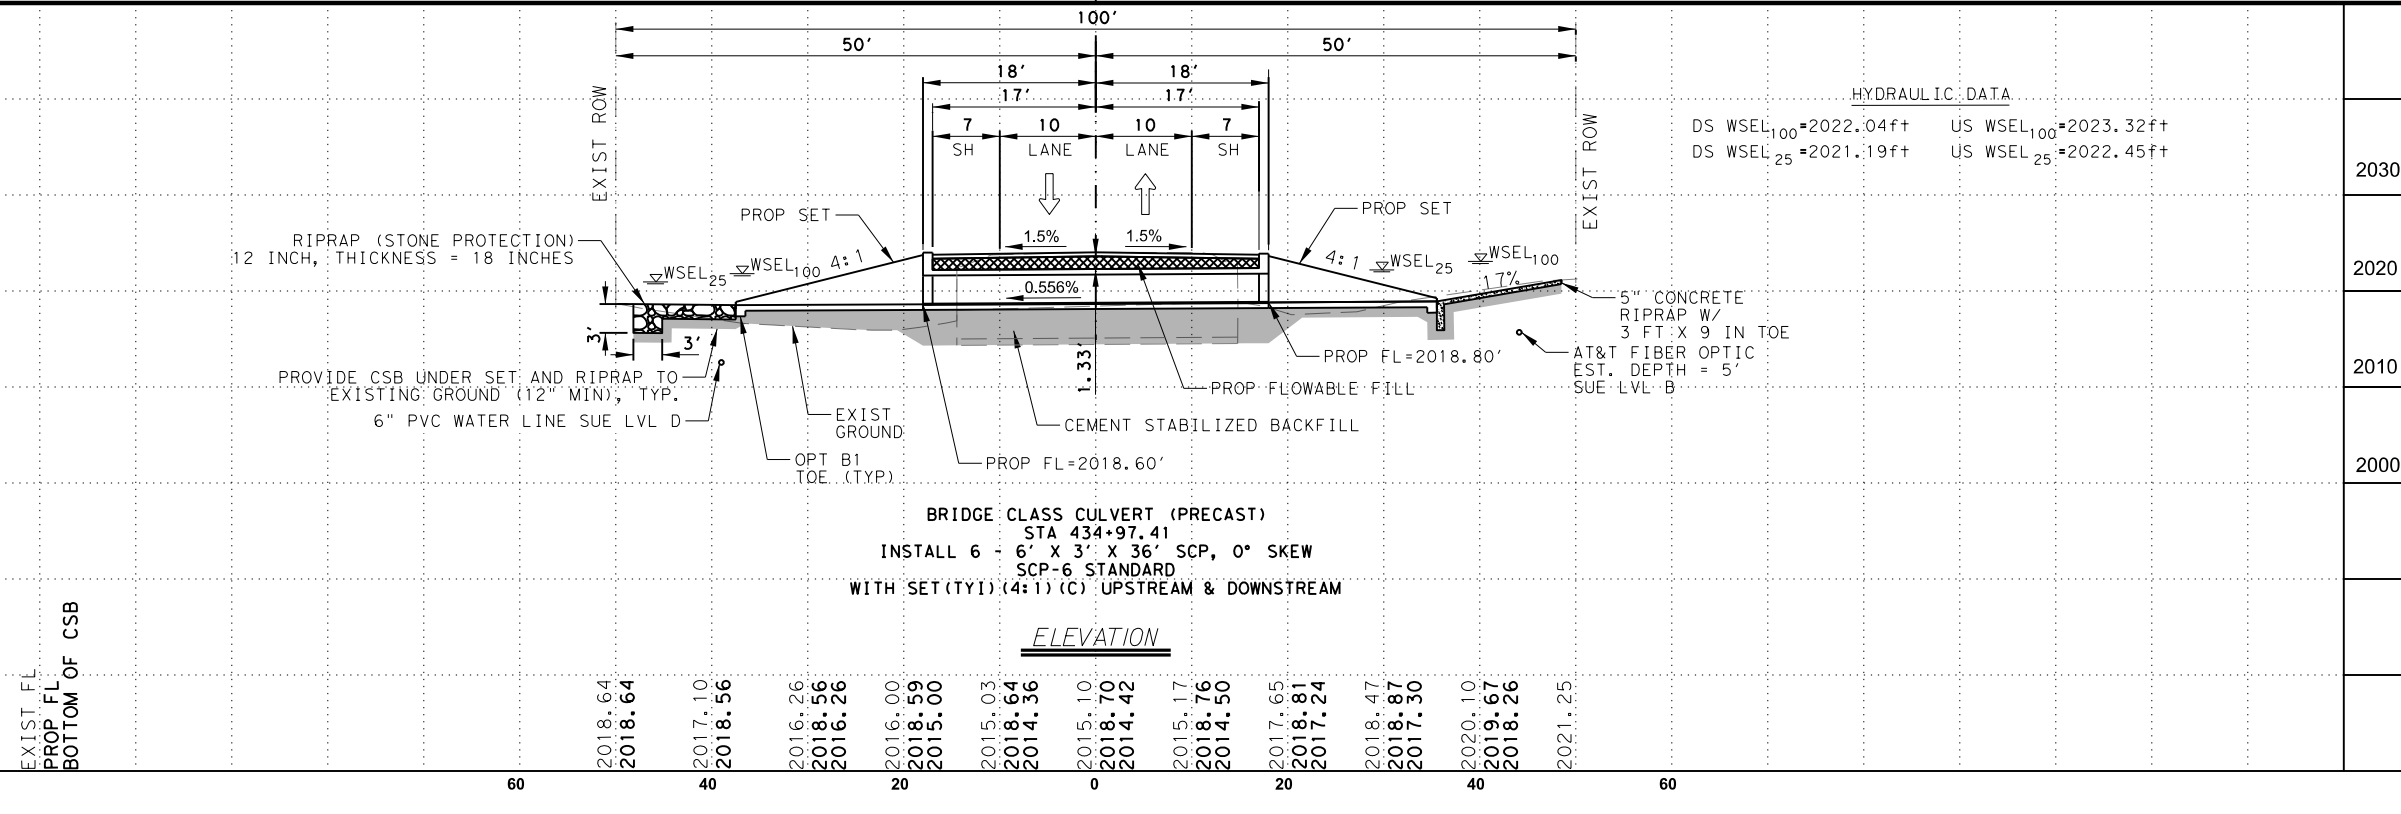

HYDRAULIC DATA  
 DS WSEL<sub>100</sub> = 2022.04ft US WSEL<sub>100</sub> = 2023.32ft  
 DS WSEL<sub>25</sub> = 2021.19ft US WSEL<sub>25</sub> = 2022.45ft

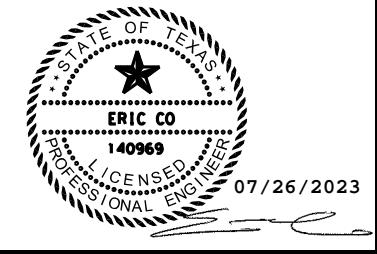


Walter P. Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

**FM 419  
 BRIDGE CLASS  
 CULVERT LAYOUT**

SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.	
6	SEE TITLE SHEET	037	
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419





**STRUCTURE ID TEMPLATES**

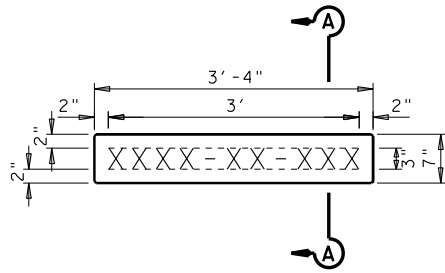


NOTE: THE SYMBOLS XXXX-XX-XXX REPRESENT THE STRUCTURE NUMBER WHICH IS SHOWN IN THE TABLE TO THE RIGHT.

ALL CHARACTERS ARE REQUIRED, AND ARE TO BE FORMATTED EXACTLY AS SHOWN IN THE STRUCTURE NUMBER COLUMN TO THE RIGHT.


STRUCTURE ID TEMPLATE NUMBERS							
NBI NUMBER	LOCATION	STRUCTURE NUMBER	"WL"	"Lw"	"Hw"	"FBW" #	"FTS" #
08-077-0-1652-01-005	FM 419 OVER DRAW CREEK	1652-01-015	N/A	LT 19.167' RT 18.000'	LT 5.125' RT 4.833'	VARIOUS	VARIOUS

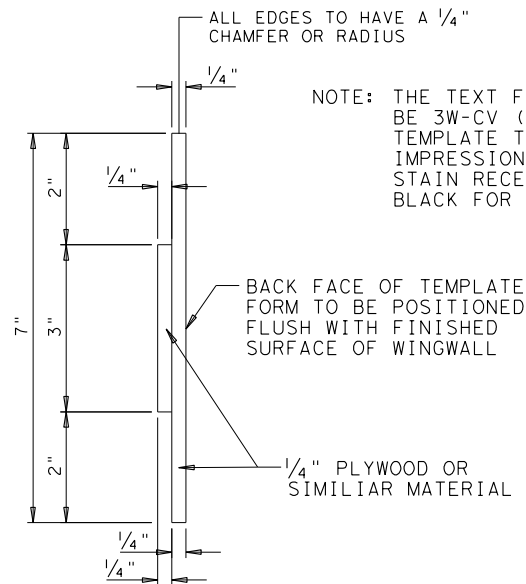

NOTE: THE TEXT FOR ALL TEMPLATES SHOULD BE 3W-CV (3") CLEAR VIEW FONT. TEMPLATE TO PROVIDE A RECESSED IMPRESSION INTO CAST CONCRETE. STAIN RECESSED NUMERAL SURFACES BLACK FOR CONTRAST.

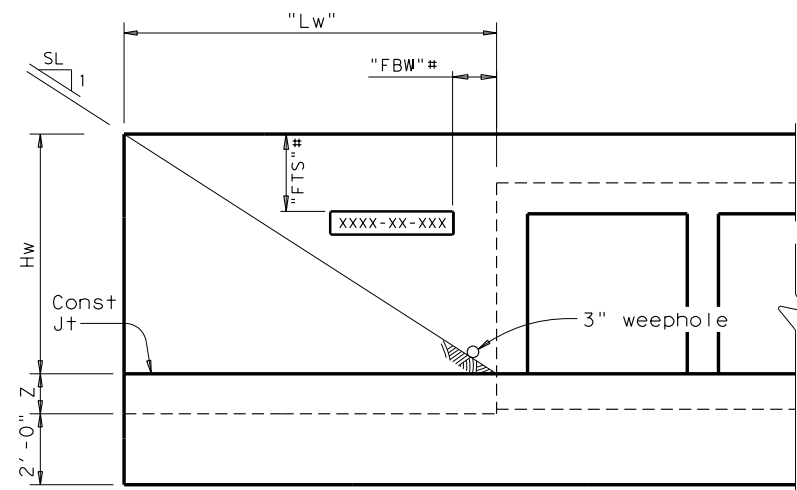

**PARALLEL WING ELEVATION**

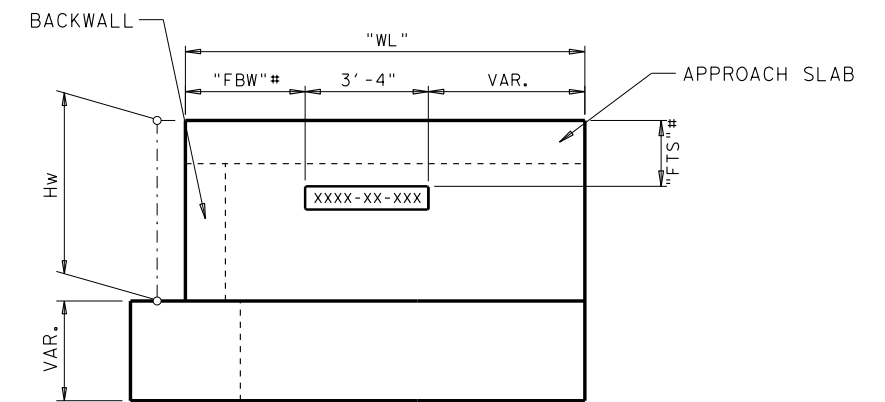

**WINGWALL ELEVATION**

# FIELD LOCATE TO AVOID CONFLICT WITH REINFORCEMENT AND RIPRAP. THE ENGINEER SHALL APPROVE INSTALLATION LOCATION PRIOR TO PLACEMENT.



NOTE: THE STRUCTURE ID'S ARE USUALLY PLACED ON THE RIGHT HAND SIDE OF APPROACHES. THIS PLACES THE ID'S ON DIAGONAL CORNERS. THE STRUCTURE ID'S WILL NOT BE PAID FOR DIRECTLY, BUT WILL BE CONSIDERED SUBSIDIARY TO THE VARIOUS BRIDGE ITEMS.

**STRUCTURE ID DETAILS  
SIDD-14**



NO SCALE		SHEET 1 OF 1	
FHWA DIVISION	PROJECT NO.	HIGHWAY NO.	
6	SEE TITLE SHEET	FM 419	
STATE	COUNTY	SHEET NO.	
TEXAS	FISHER	038	
DISTRICT	CONTROL	SECTION	JOB
ABL	1652	01	015



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

**BOX DATA**

SECTION DIMENSIONS					Fill Height (ft.)	M (Min) (in.)	REINFORCING (sq. in. / ft.) <sup>②</sup>						① Lift Weight (tons)
S (ft.)	H (ft.)	TT (in.)	TB (in.)	TS (in.)			AS1	AS2	AS3	AS4	AS5	AS7	
6	2	8	7	7	< 2	-	0.23	0.27	0.19	0.17	0.19	0.17	7.2
6	2	7	7	7	2 < 3	43	0.25	0.21	0.17	0.17	-	-	6.8
6	2	7	7	7	3 - 5	43	0.20	0.17	0.17	0.17	-	-	6.8
6	2	7	7	7	10	39	0.20	0.17	0.17	0.17	-	-	6.8
6	2	7	7	7	15	39	0.26	0.20	0.20	0.17	-	-	6.8
6	2	7	7	7	20	39	0.34	0.26	0.26	0.17	-	-	6.8
6	2	7	7	7	25	39	0.43	0.32	0.32	0.17	-	-	6.8
6	2	7	7	7	30	39	0.52	0.38	0.39	0.17	-	-	6.8
6	3	8	7	7	< 2	-	0.20	0.31	0.22	0.17	0.19	0.19	7.9
6	3	7	7	7	2 < 3	43	0.21	0.24	0.19	0.17	-	-	7.5
6	3	7	7	7	3 - 5	39	0.17	0.18	0.17	0.17	-	-	7.5
6	3	7	7	7	10	39	0.17	0.18	0.19	0.17	-	-	7.5
6	3	7	7	7	15	38	0.22	0.24	0.24	0.17	-	-	7.5
6	3	7	7	7	20	38	0.28	0.31	0.31	0.17	-	-	7.5
6	3	7	7	7	25	38	0.35	0.38	0.39	0.17	-	-	7.5
6	3	7	7	7	30	38	0.42	0.46	0.46	0.17	-	-	7.5
6	4	8	7	7	< 2	-	0.19	0.34	0.25	0.17	0.19	0.19	8.6
6	4	7	7	7	2 < 3	43	0.19	0.27	0.21	0.17	-	-	8.2
6	4	7	7	7	3 - 5	39	0.17	0.21	0.19	0.17	-	-	8.2
6	4	7	7	7	10	39	0.17	0.20	0.21	0.17	-	-	8.2
6	4	7	7	7	15	38	0.18	0.27	0.27	0.17	-	-	8.2
6	4	7	7	7	20	38	0.24	0.34	0.35	0.17	-	-	8.2
6	4	7	7	7	25	38	0.29	0.43	0.42	0.17	-	-	8.2
6	4	7	7	7	30	38	0.35	0.51	0.52	0.17	-	-	8.2
6	5	8	7	7	< 2	-	0.19	0.37	0.28	0.17	0.19	0.19	9.3
6	5	7	7	7	2 < 3	43	0.17	0.30	0.24	0.17	-	-	8.9
6	5	7	7	7	3 - 5	43	0.17	0.23	0.21	0.17	-	-	8.9
6	5	7	7	7	10	39	0.17	0.22	0.23	0.17	-	-	8.9
6	5	7	7	7	15	38	0.17	0.28	0.29	0.17	-	-	8.9
6	5	7	7	7	20	38	0.20	0.37	0.38	0.17	-	-	8.9
6	5	7	7	7	25	38	0.25	0.45	0.46	0.17	-	-	8.9
6	5	7	7	7	30	38	0.30	0.54	0.55	0.17	-	-	8.9
6	6	8	7	7	< 2	-	0.19	0.38	0.30	0.17	0.19	0.19	10
6	6	7	7	7	2 < 3	52	0.17	0.32	0.26	0.17	-	-	9.6
6	6	7	7	7	3 - 5	52	0.17	0.24	0.22	0.17	-	-	9.6
6	6	7	7	7	10	43	0.17	0.23	0.24	0.17	-	-	9.6
6	6	7	7	7	15	39	0.17	0.29	0.31	0.17	-	-	9.6
6	6	7	7	7	20	39	0.18	0.38	0.39	0.17	-	-	9.6
6	6	7	7	7	25	38	0.23	0.46	0.48	0.17	-	-	9.6
6	6	7	7	7	30	38	0.27	0.55	0.57	0.17	-	-	9.6


① For box length = 8'-0"

② AS1 thru AS4, AS7 and AS8 are minimum required areas of reinforcement per linear foot of box length. AS5 is minimum required area of reinforcement per linear foot of box width.

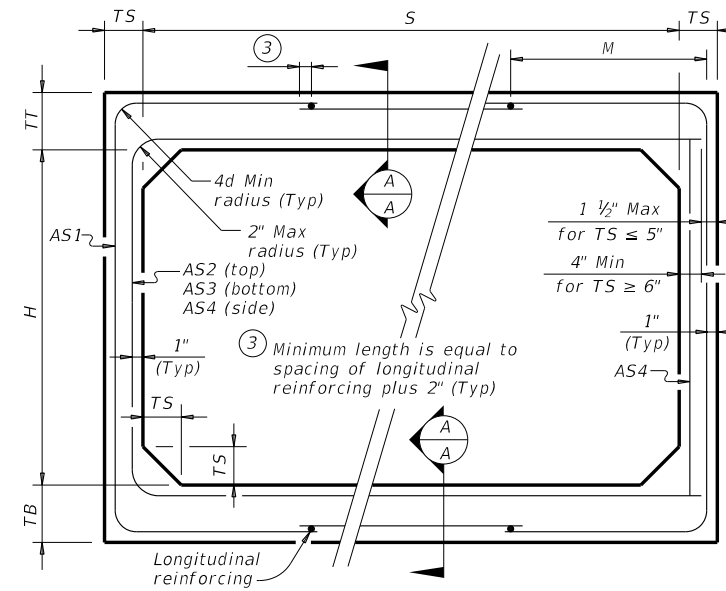

CORNER OPTION "A" CORNER OPTION "B"


**FILL HEIGHT 2 FT AND GREATER**

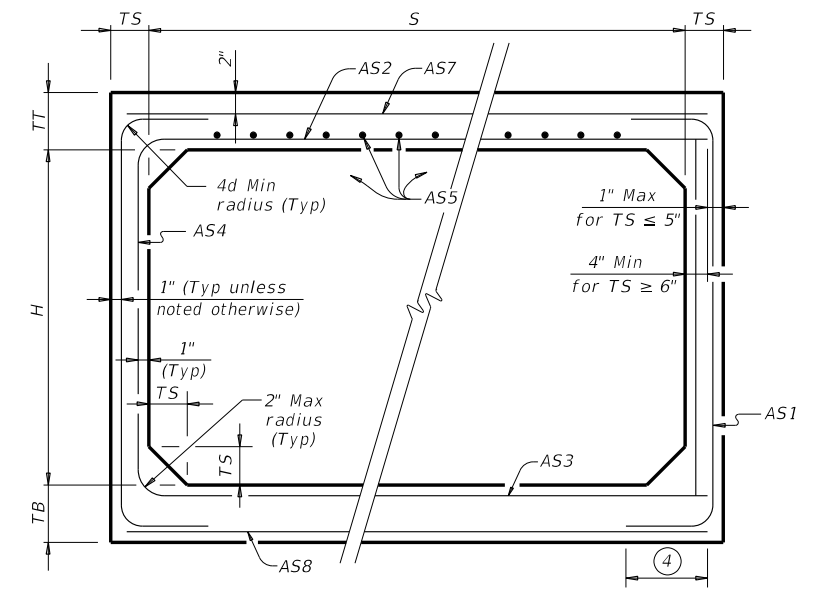

CORNER OPTION "A" CORNER OPTION "B"

**FILL HEIGHT LESS THAN 2 FT**

④ Length is equal to spacing of longitudinal reinforcing plus 2". (10" Min) (Typ)

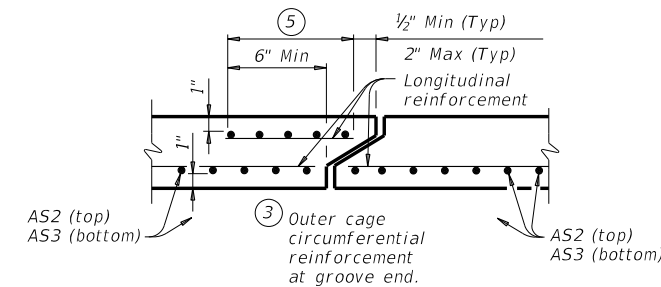

**SECTION A-A**

(Showing top and bottom slab joint reinforcement.)

**MATERIAL NOTES:**

Provide 0.03 sq. in./ft. minimum longitudinal reinforcement at each face in slabs and walls. This minimum requirement may be met by the transverse wires when wire mesh reinforcement is used.  
Provide Class H concrete (f'c = 5,000 psi).

**GENERAL NOTES:**


Designs shown conform to ASTM C1577. Refer to ASTM C1577 for information or details not shown.  
See Box Culverts Precast Miscellaneous Details (SCP-MD) standard sheet for details and notes not shown.  
In lieu of furnishing the designs shown on this sheet, the contractor may furnish an alternate design that is equal to or exceeds the box design for the design fill height in the table. Submit shop plans for alternate designs in accordance with Item "Precast Concrete Structural Members (Fabrication)".

HL93 LOADING

		<b>Bridge Division Standard</b>	
<b>SINGLE BOX CULVERTS PRECAST 6'-0" SPAN</b>			
<b>SCP-6</b>			
FILE: scp06sts-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT
©TxDOT February 2020	CONT	SECT	JOB
REVISIONS	1652	01	015
	DIST	COUNTY	SHEET NO.
	ABL	FISHER	040


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

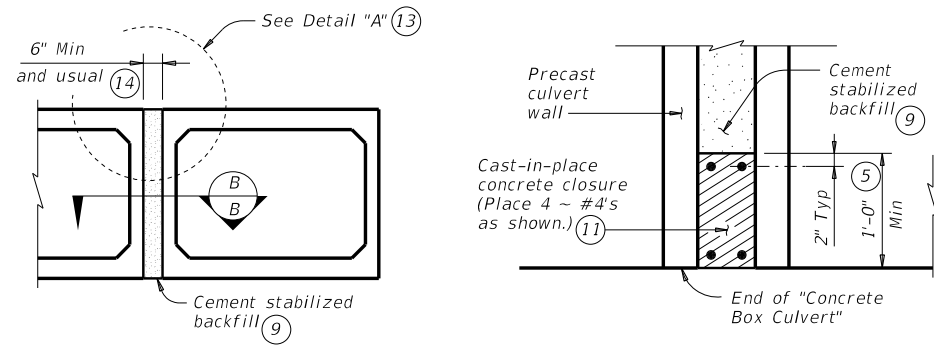


**MULTIPLE UNIT PLACEMENT**

**SECTION B-B**

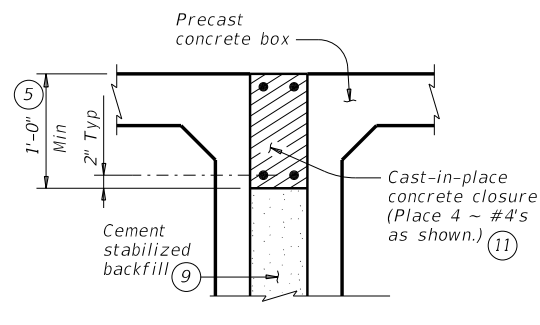


**DETAIL "A"**

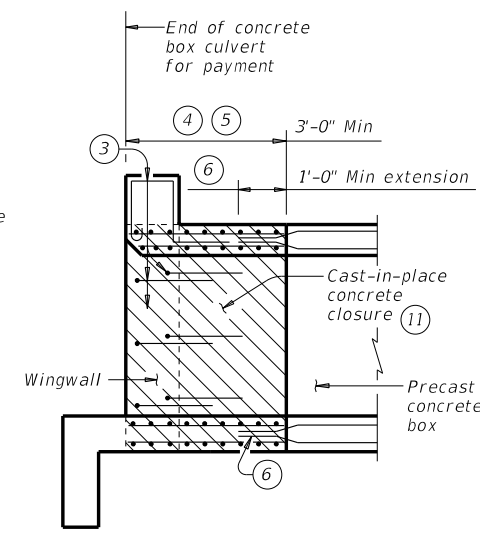


**WINGWALL CONNECTION**

(Also applies to safety end treatment.)

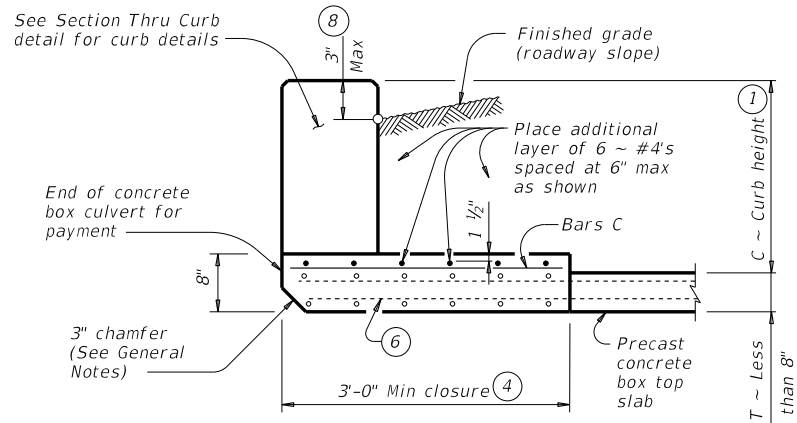


**SECTION THRU TOP SLABS LESS THAN 8"**

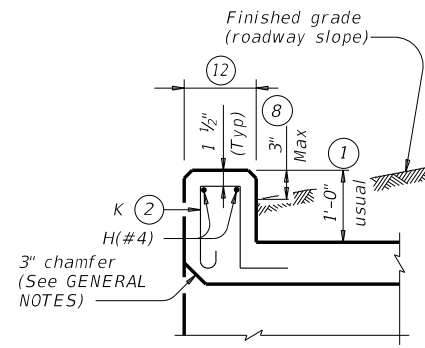


**SECTION THRU CURB**

QUANTITIES PER FOOT OF CURB (10)	
Reinforcing Steel	4.12 Lb
Concrete	0.037 CY



**BARS C (#4)**  
(Spa = 1'-0" Max)




**BARS K (#4)**  
(Spa = 1'-0" Max)  
(Length = 4'-2")

- 0" Min to 5'-0" Max. Estimated curb heights are shown elsewhere in the plans. For structures with pedestrian rail, bicycle rail, or curbs taller than 1'-0, refer to the Extended Curb Details (ECD) standard sheet. For structures with T631 or T631LS bridge rail, refer to the Mounting Details for T631 & T631LS Rails (T631-CM) standard sheet. Refer to the Box Culvert Rail Mounting Details (RAC) standard sheet for structures with bridge rail other than T631 or T631LS.
- For curbs less than 1'-0" high, tilt Bars K or reduce bar height as necessary to maintain cover. For curbs less than 3" high, Bars K may be omitted.
- Extend curb, wingwall, or safety end treatment reinforcing into concrete closure. Bend or trim, as necessary, any reinforcing that does not fit into closure area.
- Provide a 3'-0" Min cast-in-place concrete closure. Break back boxes in the field or cast boxes short. Provide bands of reinforcing in the closure that are the same size and spacing as in the precast box section. Provide #4 longitudinal reinforcement spaced at 12 inches Max within the closure. Except where shown otherwise, construct the cast-in-place closure flush with the inside and outside faces of the precast box section.
- For multiple unit placements, adjust the length of the closure for the interior walls as necessary. Provide a 3'-0" Min cast-in-place closure in the top slab, bottom slab, and exterior wall. See Section B-B detail when interior walls are cast full length.
- Extend precast box reinforcing a minimum of 1'-0" into concrete closure (Typ).
- Place bands of reinforcing matching the inside and outside face reinforcing in the gaps of the top and bottom slabs. Place a band matching the outside face reinforcing of the wall in the gaps of the walls (placed in the outside face only). Tack weld the bands to the exposed reinforcing at each point of contact.
- For vehicle safety, the following requirements must be met:
  - For structures without bridge rail, construct curbs no more than 3" above finished grade.
  - For structures with bridge rail, construct curbs flush with finished grade. Reduce curb heights, if necessary, to meet the above requirements. No changes will be made in quantities and no additional compensation will be allowed for this work.
- Cement stabilized backfill between boxes is considered part of the box culvert for payment.
- All curb concrete and reinforcing is considered part of the box culvert for payment.
- Any additional concrete and reinforcing required for the closures will be considered subsidiary to the box culvert for payment.
- 1'-0" typical. 2'-3" when the Box Culvert Rail Mounting Details (RAC) standard sheet is referred to elsewhere in the plans.
- For multiple unit placement with overlay, with 1 to 2 course surface treatment, or with the top slab as the final riding surface, provide wall closure as shown in Detail "A".
- This dimension may be increased with approval of the Engineer to allow the precast boxes to be tunneled or jacked in accordance with Item 476, "Jacking, Boring, or Tunneling Pipe or Box". No payment will be made for any additional material in the gap between adjacent boxes.


**MATERIAL NOTES:**  
Provide Grade 60 reinforcing steel.  
Provide ASTM A1064 welded wire reinforcement.  
Provide Class C concrete (f'c = 3,600 psi) for the closures.  
Provide cement stabilized backfill meeting the requirements of Item 400, "Excavation and Backfill for Structures."  
Any additional concrete required for the closures will be considered subsidiary to the box culvert.

**GENERAL NOTES:**  
Designed according to AASHTO LRFD Bridge Design Specifications.  
Refer to the Single Box Culverts Precast (SCP) standard sheets for details and notes not shown.  
Chamfer the bottom edge of the top slab closure 3 inches at culvert closure ends.


Cover dimensions are clear dimensions, unless noted otherwise.  
Reinforcing bars dimensions are out-to-out of bars.

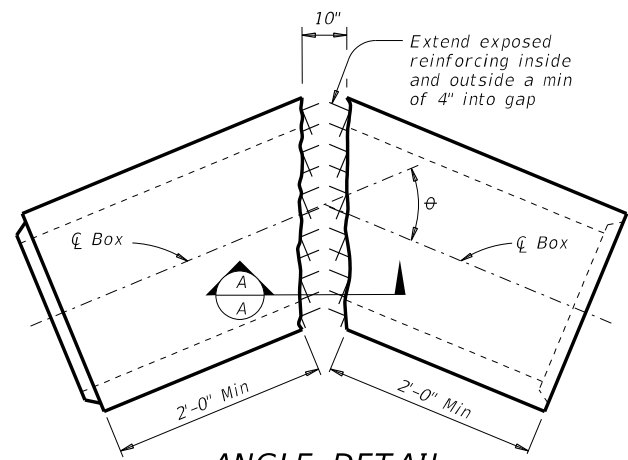

**ANGLE DETAIL**

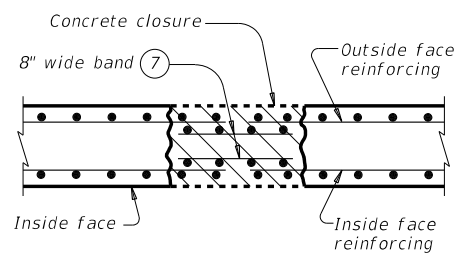

**SECTION A-A**

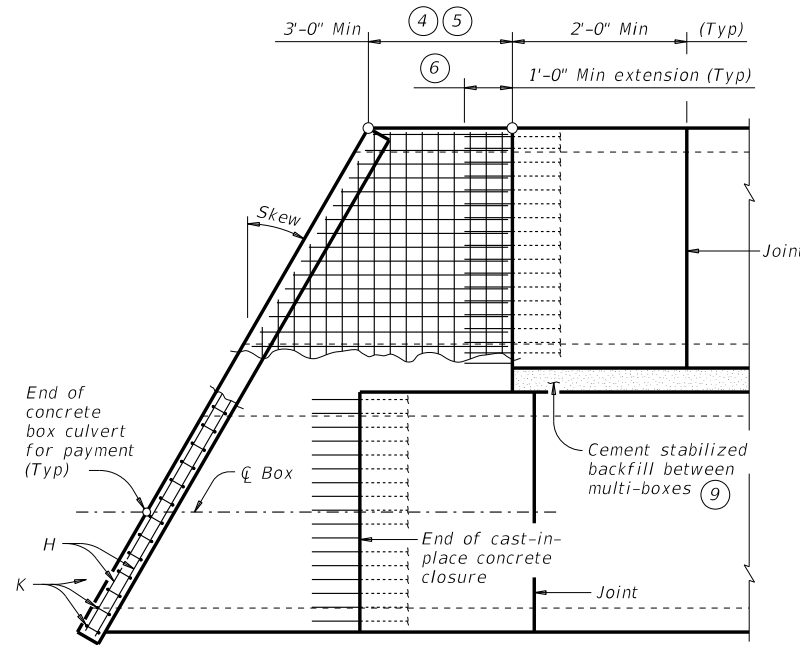

**PLAN OF SKEWED ENDS**



(Showing multi-box placement.)

HL93 LOADING

		<b>Bridge Division Standard</b>	
<b>BOX CULVERTS          PRECAST          MISCELLANEOUS DETAILS</b>			
<b>SCP-MD</b>			
FILE: scpmdsts-20.dgn	DN: GAF	ck: LMW	DW: BWH/TxDOT ck: GAF
©TxDOT February 2020	CONT	SECT	JOB HIGHWAY
REVISIONS	1652	01	015 FM419
DIST	COUNTY		SHEET NO.
ABL	FISHER		041

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

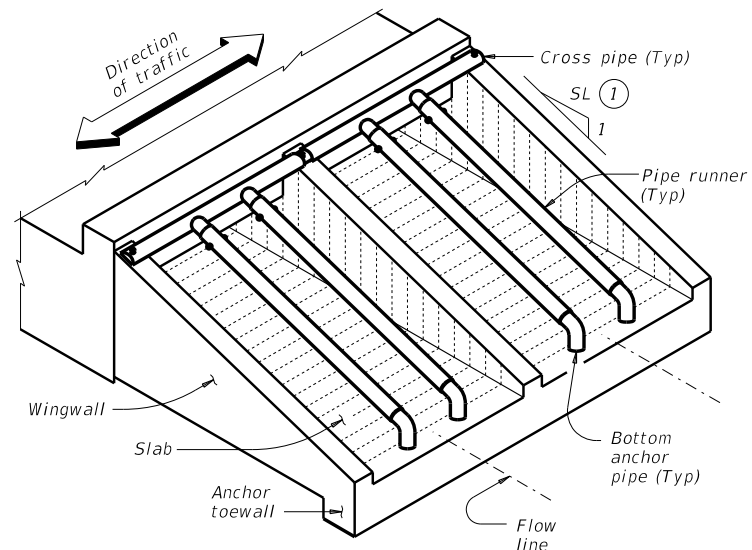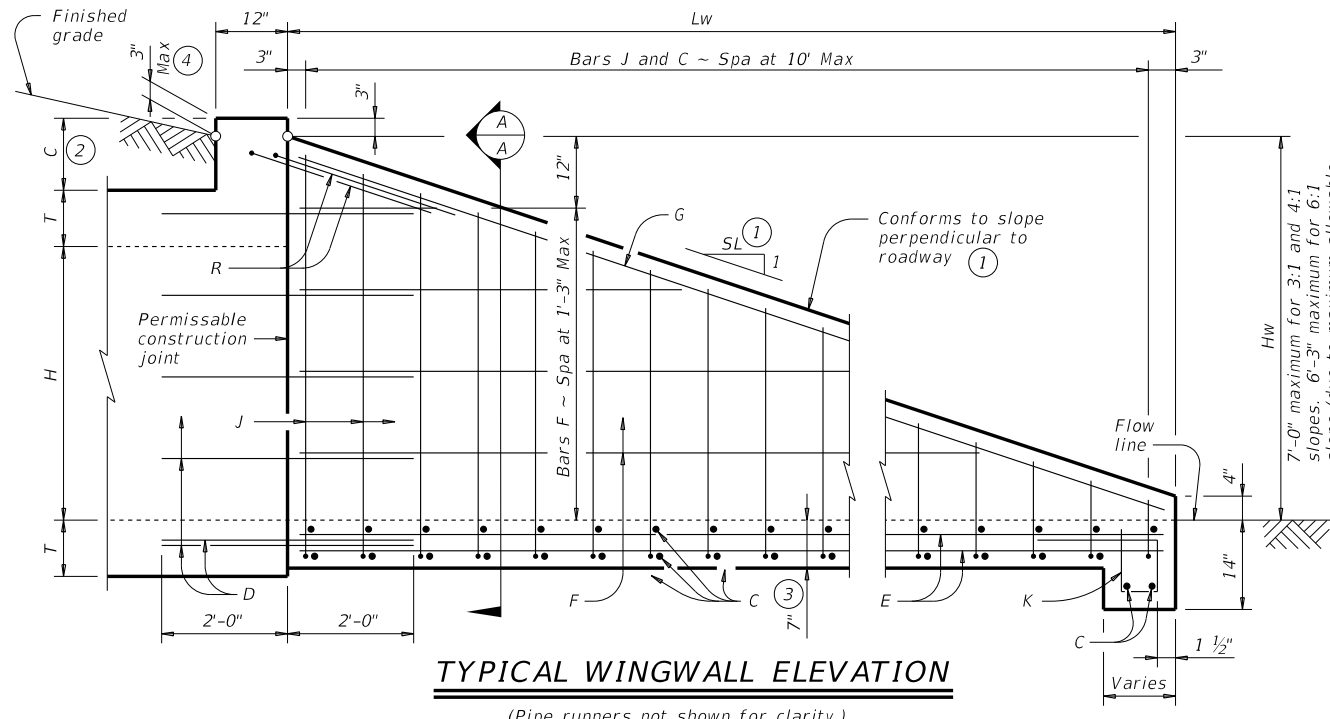

**WING DIMENSION CALCULATIONS:**

$$Hw = H + T + C - 0.250'$$

$$Lw = (Hw - 0.333') (SL)$$

For cast-in-place culverts:  
 $Atw = (N) (S) + (N + 1) (U)$

For precast culverts:  
 $Atw = (N) (2U + S) + (N - 1) (0.500')$

Total Wingwall Area (SF)  
 $= (0.5) (Hw + 0.333') (Lw) (N + 1)$

Total Concrete Volume (CY)  
 $= [(Wingwall Area) (0.583') + (Lw) (Atw) (0.583') + (Atw) (1.167') (1.167' - 0.583')] \div (27)$

**PIPE RUNNER DIMENSION CALCULATIONS:**

Pipe Runner Length  
 $= (Lw) (K1) - (1.917')$

Total Reinforcing (Lb)  
 $= (1.55) (Lw) (Atw) + (4.43) (Atw) + (K2) (Hw) (N + 1) (\sqrt{Lw})$

C = Height of curb above top of top slab (feet)  
Hw = Height of wingwall (feet)  
K = Constant value for use in formulas

Slope SL:1	K1	K2
3:1	~ 1.054	~ 7.45
4:1	~ 1.031	~ 8.49
6:1	~ 1.014	~ 10.30

Atw = Anchor toewall length (feet)  
Lw = Length of wingwall (feet)  
N = Number of culvert barrels  
SL:1 = Side slope ratio (horizontal : 1 vertical)

See applicable box culvert standard for H, S, T, and U values.

**MATERIAL NOTES:**

Provide Grade 60 reinforcing steel.  
Provide galvanized reinforcing steel if required elsewhere in the plans.  
Adjust reinforcing as necessary to provide a minimum clear cover of 1 1/2".  
Provide Class "C" concrete (f'c = 3,600 psi).  
Provide pipe runners, cross pipes, and anchor pipes meeting the requirements of ASTM A53 (Type E or S, Gr B), ASTM A500 Gr B, or API 5LX52.  
Provide ASTM A307 bolts.  
Galvanize all steel components, except the concrete reinforcing, unless required elsewhere in the plans, after fabrication.  
Repair galvanizing damaged during transport or construction in accordance with the Item 445, "Galvanizing".

**GENERAL NOTES:**

Designed according to AASHTO LRFD Bridge Design Specifications.  
The safety end treatments shown herein are intended for use in those installations where out of control vehicles are likely to traverse the openings approximately perpendicular to the pipe runners.  
Pipe runners are designed for a traversing load of 1,800 pounds at yield as recommended by Research Report 280-1, "Safety Treatment of Roadside Cross-Drainage Structures", Texas Transportation Institute, March 1981.  
The quantities for pipe runners, reinforcing steel, and concrete resulting from the formulas given herein are for Contractor's information only.  
See the Box Culvert Supplement (BCS) standard sheet for additional dimensions and information.  
Alternate design drawings bearing the seal of a professional engineer will be acceptable for precast construction of the safety end treatments.

Cover dimensions are clear dimensions, unless noted otherwise. Reinforcing dimensions are out-to-out of bars.


SHEET 1 OF 2

Texas Department of Transportation  
Bridge Division Standard


**SAFETY END TREATMENT FOR 0° SKEW BOX CULVERTS (MAXIMUM Hw = 7'-0") TYPE I ~ CROSS DRAINAGE**

**SETB-CD**


FILE: setbcdse-20.dgn	DN: GAF	CK: CAT	DW: TxDOT	CK: TxDOT
©TxDOT February 2020	CONT: 1652	SECT: 01	JOB: 015	HIGHWAY: FM 419
REVISIONS	DIST: ABL	COUNTY: FISHER	SHEET NO. 042	

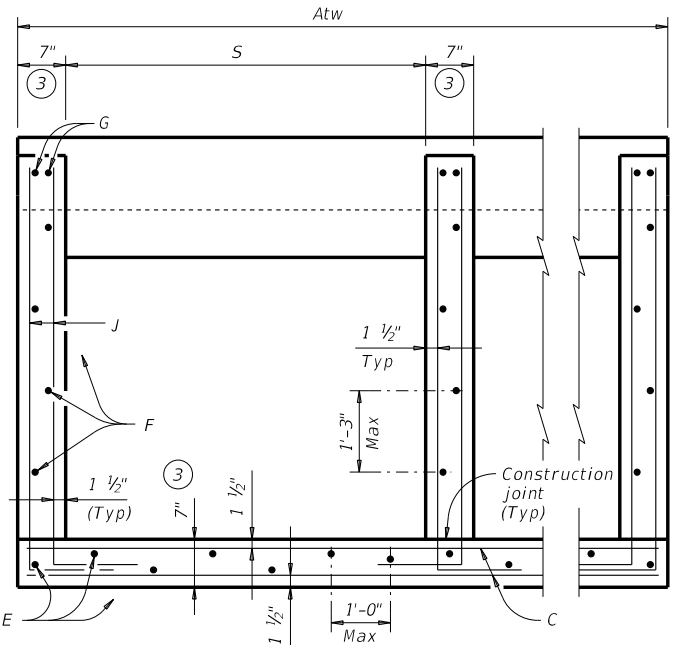


**SECTION A-A**  
(Showing typical wingwall and wing slab reinforcing. Pipe runners not shown for clarity.)

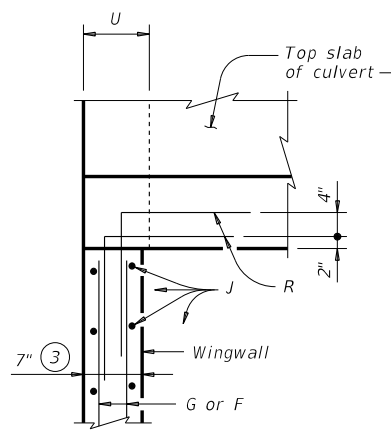


**AT TOP OF EXTERIOR WINGWALL**  
(Cast-in-place culvert)

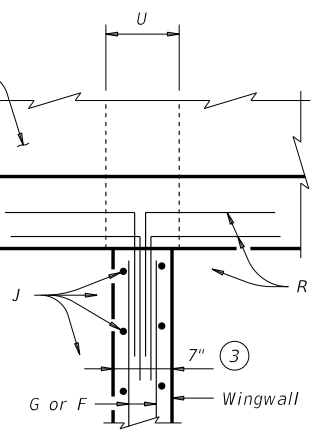

**AT TOP OF INTERIOR WINGWALL**  
(Cast-in-place culvert)

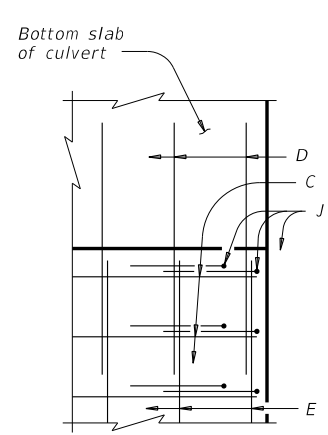

**AT OUTSIDE OF BOTTOM SLAB**  
(Cast-in-place culvert)

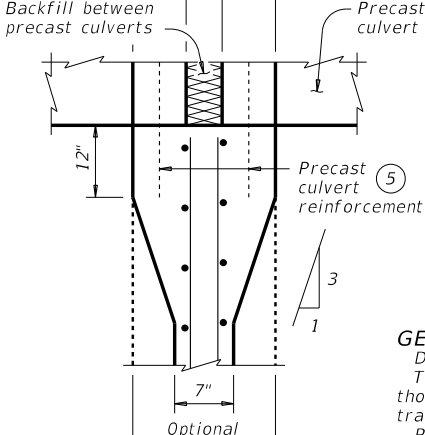


**AT INTERIOR WINGWALL**  
(Precast culvert)

**PLAN VIEWS OF CORNER DETAILS**

- Recommended values of slope are: 3:1, 4:1, and 6:1. Provide 3:1 or flatter slope.
- 0" Min to 5'-0" Max. Estimated curb heights are shown elsewhere in the plans. For structures without railing and curbs taller than 1'-0", refer to the Extended Curb Details (ECD) standard sheet.
- Wingwall and slab thicknesses may be the same as the adjacent culvert wall and slab thicknesses (7" minimum). If thicknesses greater than the minimum (7") are used, no changes will be made in quantities and no additional compensation will be allowed.
- For vehicle safety, reduce curb height, if necessary, to provide a maximum 3" projection. No changes will be made in quantities and no additional compensation will be allowed for this work.
- For culverts with C = 0", the precast culvert reinforcing may extend 1'-0" minimum into wingwall. Wingwall Bars D and R may be omitted. Otherwise, refer to the Wingwall Connection detail on the Box Culvert Precast Miscellaneous Details (SCP-MD) standard sheet.

**TABLE OF REINFORCING BAR SIZES AND SPACING**


Bar	Size	Spacing
C	#4	10" Max
D	#4	Match F and E
E	#4	1'-0" Max
F	#4	1'-3" Max
G	#6	As shown
J	#4	10" Max
K	#4	1'-0" Max
R	#4	As shown

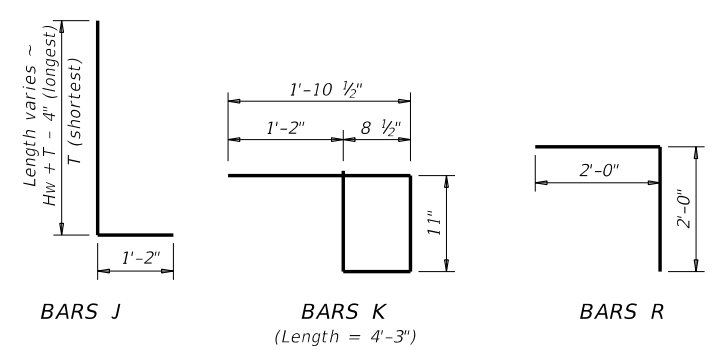




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

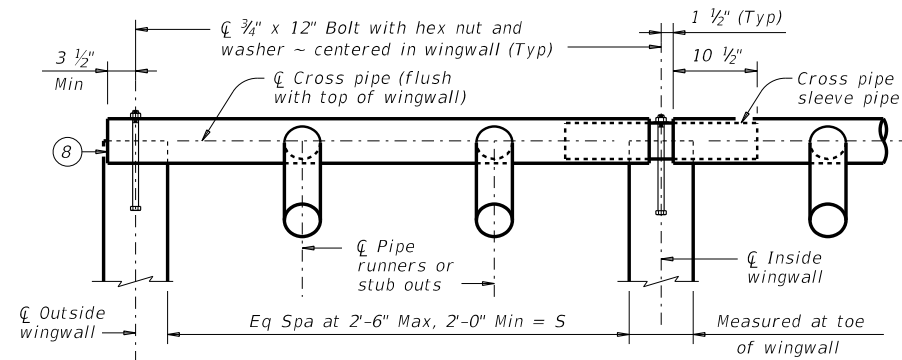


NOTE: At Contractor's option, make the cross pipe continuous across the inside wingwalls. If option is selected, omit the sleeve pipe and make a 1 5/16 inch diameter through hole in the cross pipe to accept the anchor bolt at the centerline of each inside wingwall.

**CROSS PIPE INSTALLATION DETAILS**

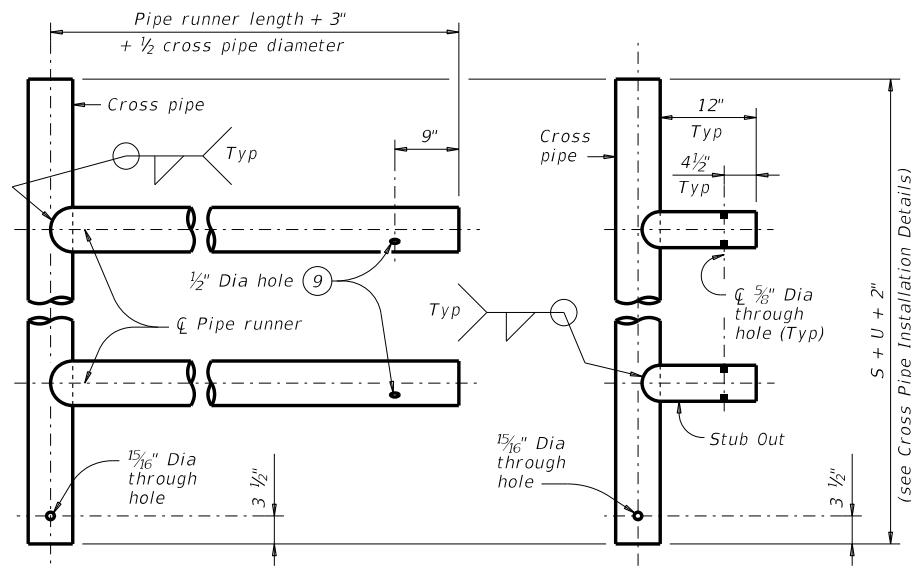


**OPTION A2** **OPTION A1**  
FOR USE IN OUTSIDE CULVERT BAY

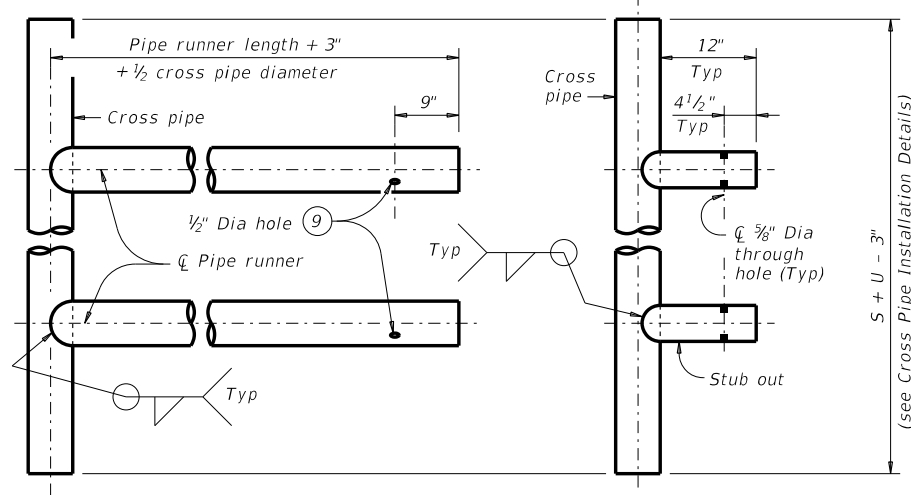


**OPTION A2** **OPTION A1**  
FOR USE IN INSIDE CULVERT BAY

**CROSS PIPE AND CONNECTIONS DETAILS**

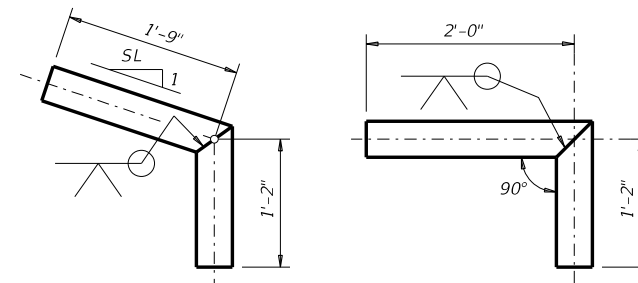


**OPTION A** **OPTION B**  
**BOTTOM ANCHOR PIPE DETAILS**

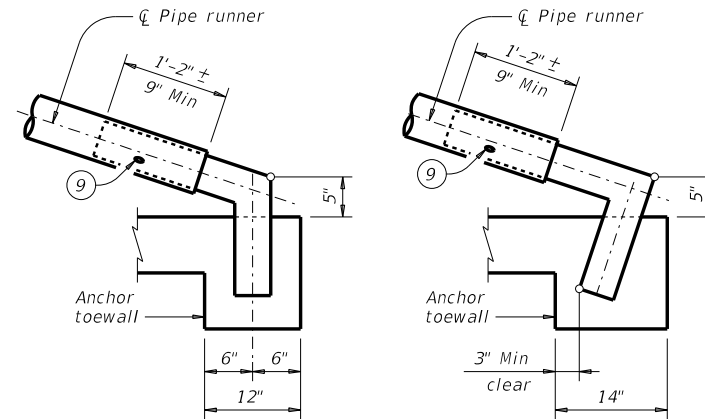


**OPTION B1** **OPTION B2**  
**BOTTOM ANCHOR TOEWALL DETAILS**

(Wingwall not shown for clarity.)



**CROSS PIPE SLEEVE PIPE DETAILS**

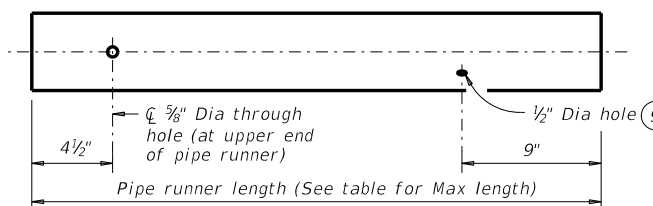


NOTE: The separate pipe runner shown is required when Cross Pipe Connection Option A1 is used.

**PIPE RUNNER DETAILS**

- ⑥ Cross pipe is the same size as the pipe runner. Cross pipe stub out is the same size as the anchor pipe.
- ⑦ Note that actual slope of safety pipe runner may vary slightly from side slope.
- ⑧ Take care to ensure that riprap concrete does not flow into the cross pipe so as to permit disassembly of the bolted connection to allow cleanout access.
- ⑨ After installation, inspect the 1#2 hole to ensure that the lap of the safety pipe runner with the bottom anchor pipe is adequate.
- ⑩ At fabricator's option, a heat bend to a smooth 5" radius or a manufactured elbow (of the same material as the runner) may be substituted for the mitered and welded joint in the bottom anchor pipe.

Maximum Pipe Runner Length	Required Pipe Runner Size			Required Anchor Pipe Size		
	Pipe Size	Pipe O.D.	Pipe I.D.	Pipe Size	Pipe O.D.	Pipe I.D.
10'- 0"	3" STD	3.500"	3.068"	2" STD	2.375"	2.067"
19'- 8"	4" STD	4.500"	4.026"	3" STD	3.500"	3.068"
34'- 2"	5" STD	5.563"	5.047"	4" STD	4.500"	4.026"

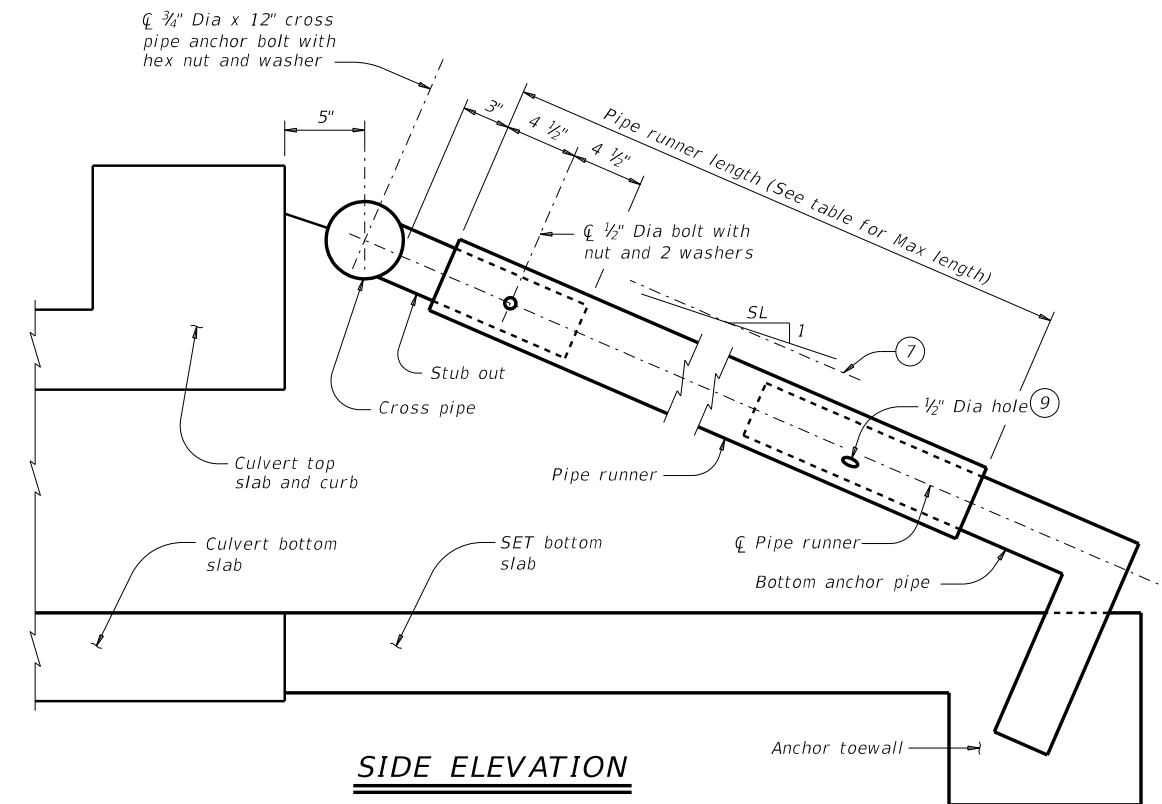

**SIDE ELEVATION**

(Showing pipe runner with Cross Pipe Connection Option A1 and Bottom Anchor Toewall Option B2. Wingwall not shown for clarity.)


SHEET 2 OF 2

				<b>Bridge Division Standard</b>	
<b>SAFETY END TREATMENT</b> FOR 0° SKEW BOX CULVERTS (MAXIMUM Hw = 7'-0") TYPE I ~ CROSS DRAINAGE					
<b>SETB-CD</b>					
FILE: setbcdse-20.dgn	DN: GAF	CK: CAT	DW: TxDOT	CK: TxDOT	
©TxDOT February 2020	CONT: 1652	SECT: 01	JOB: 015	HIGHWAY: FM 419	
REVISIONS	DIST: ABL	COUNTY: FISHER	SHEET NO: 043		


\_USER\_

DATE: 7/25/2023 4:21:42 PM


FILE: c:\users\salvador\documents\FM419\_BLG01.dgn

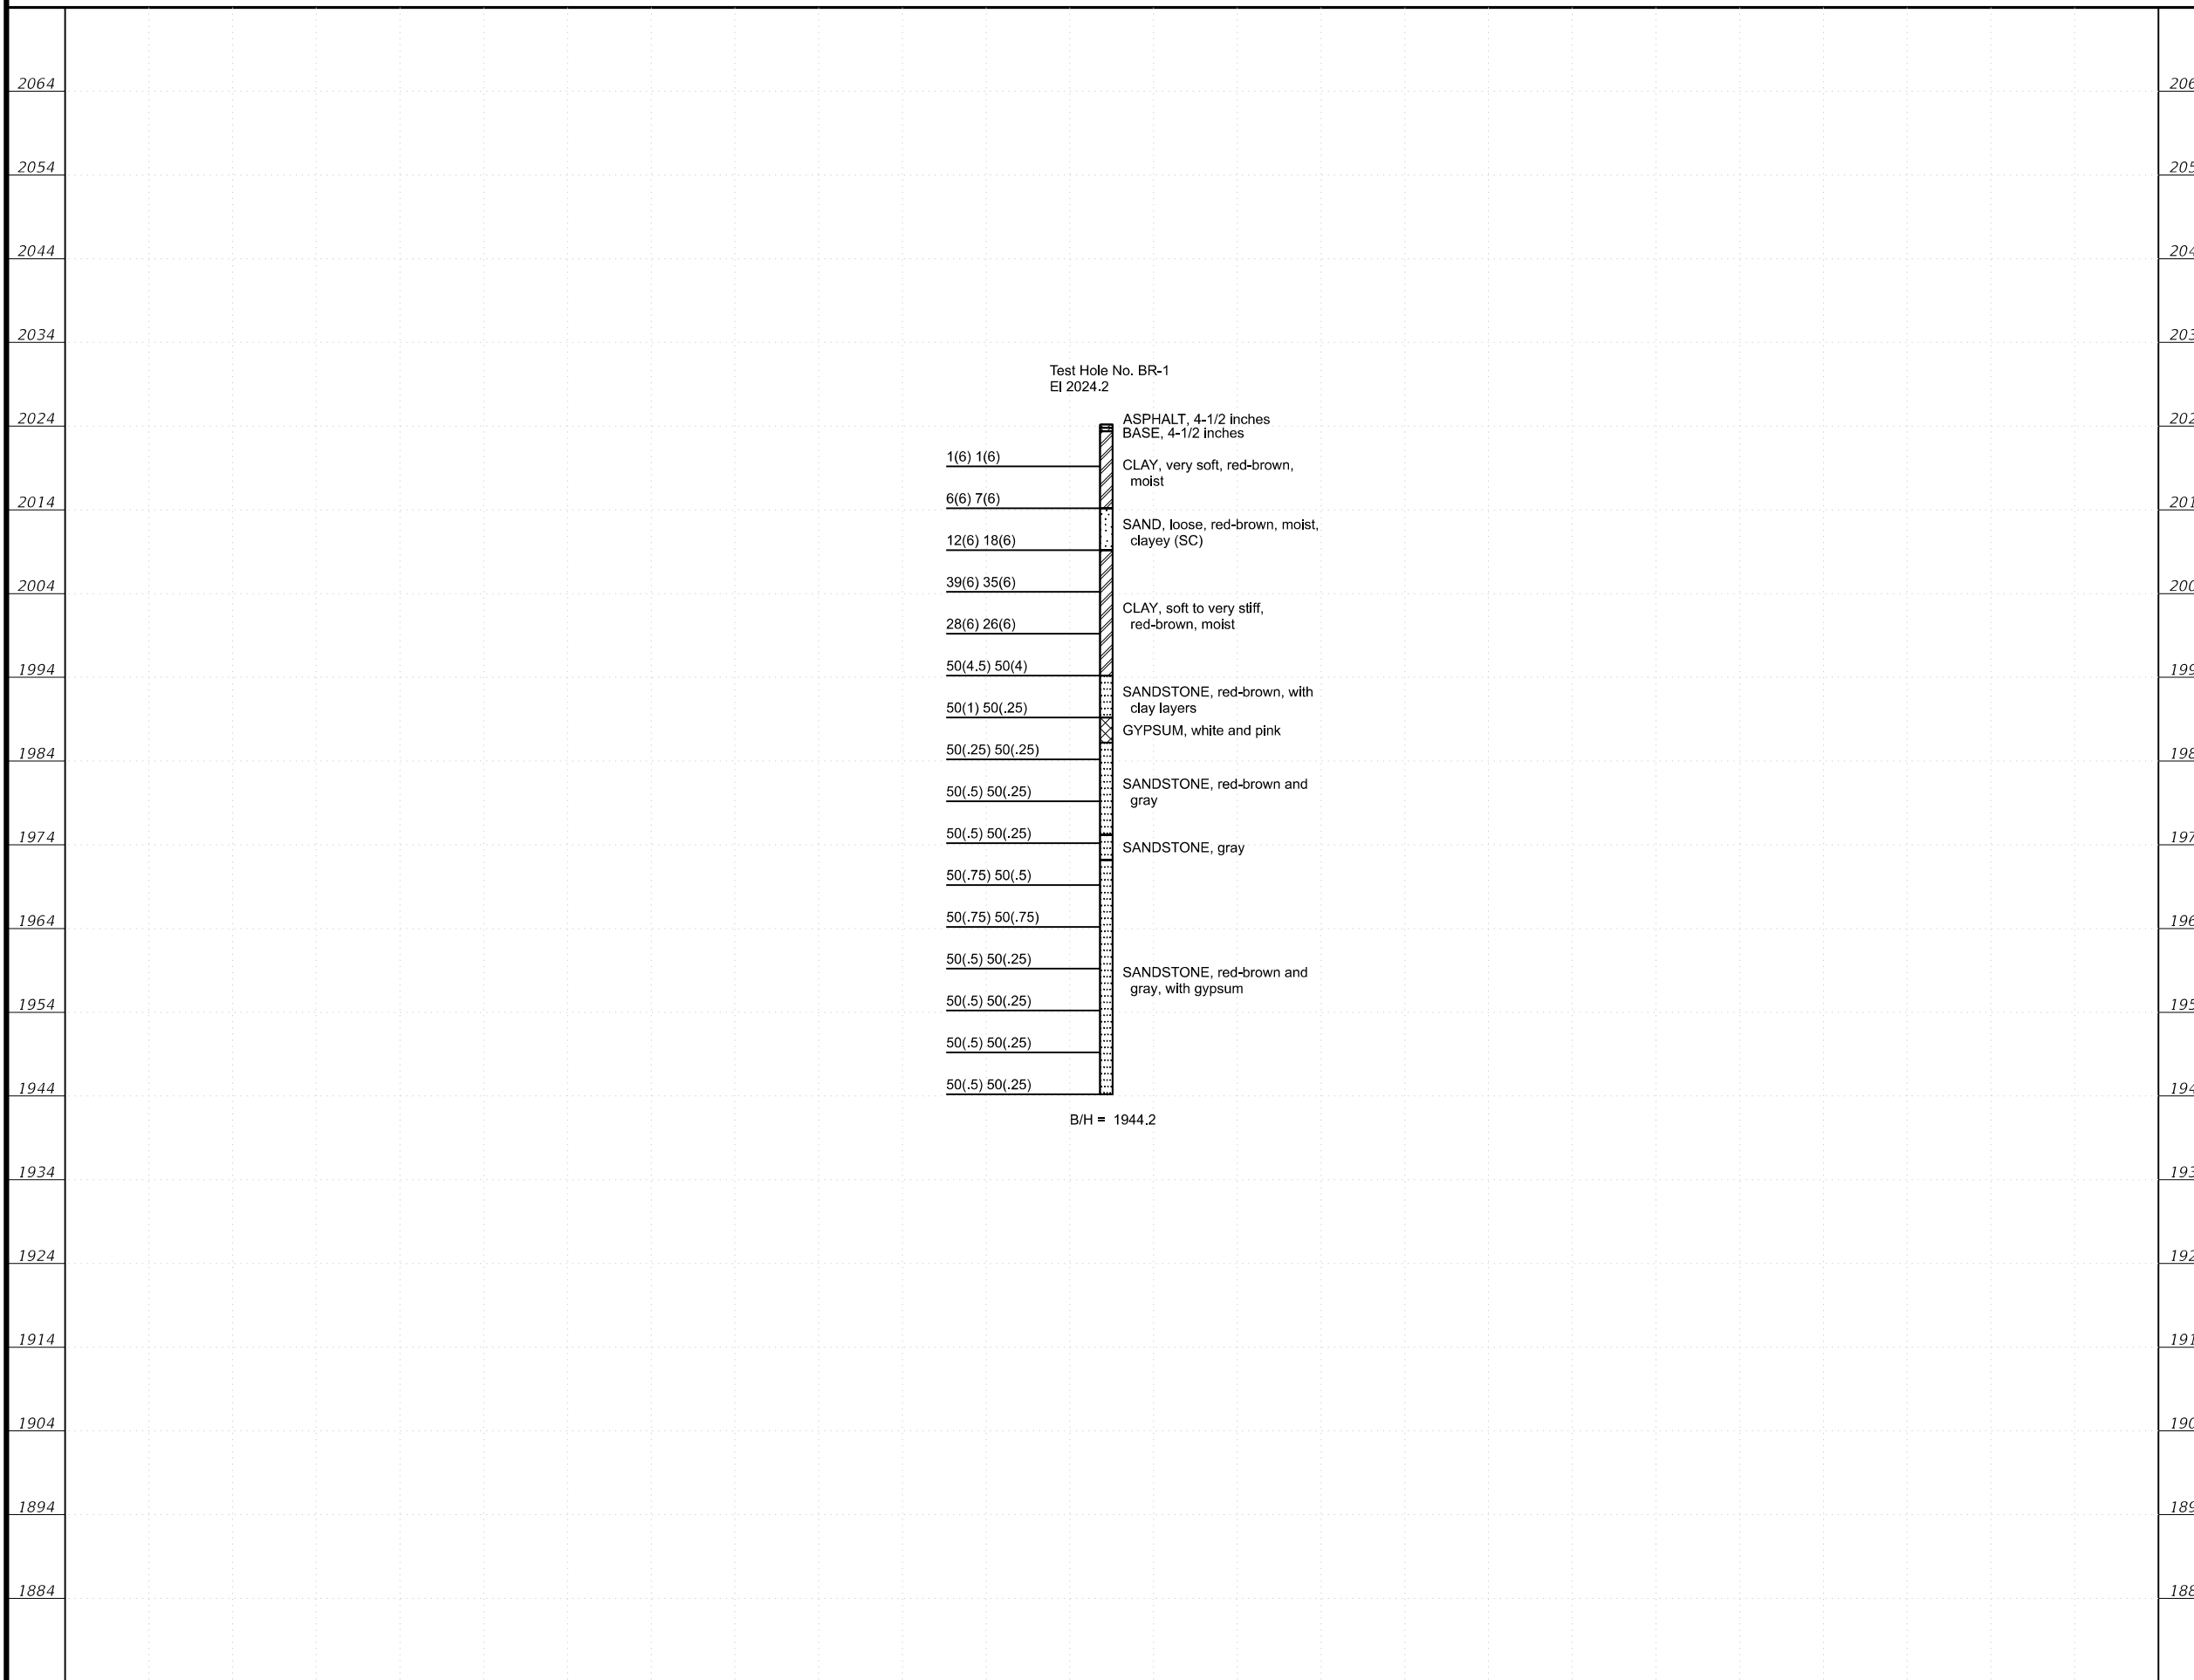

2064  
2054  
2044  
2034  
2024  
2014  
2004  
1994  
1984  
1974  
1964  
1954  
1944  
1934  
1924  
1914  
1904  
1894  
1884



NO.	DATE	REVISION	APPROVED

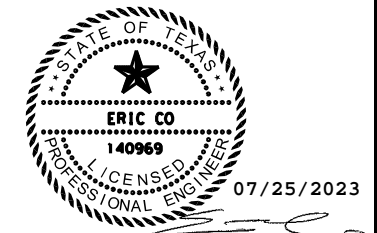

Walter P. Moore and Associates, Inc.  
1301 McKinney, Suite 1100  
Houston, Texas 77010  
Texas Firm Registration No. 1856


**FM 419  
BORING LOGS**

SHEET 1 OF 2			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		044
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD#
1652	01	015	FM 419

\_USER\_

DATE: 7/25/2023 4:20:35 PM

FILE: c:\users\salvadorr\documents\FM419\_BLG02.dgn

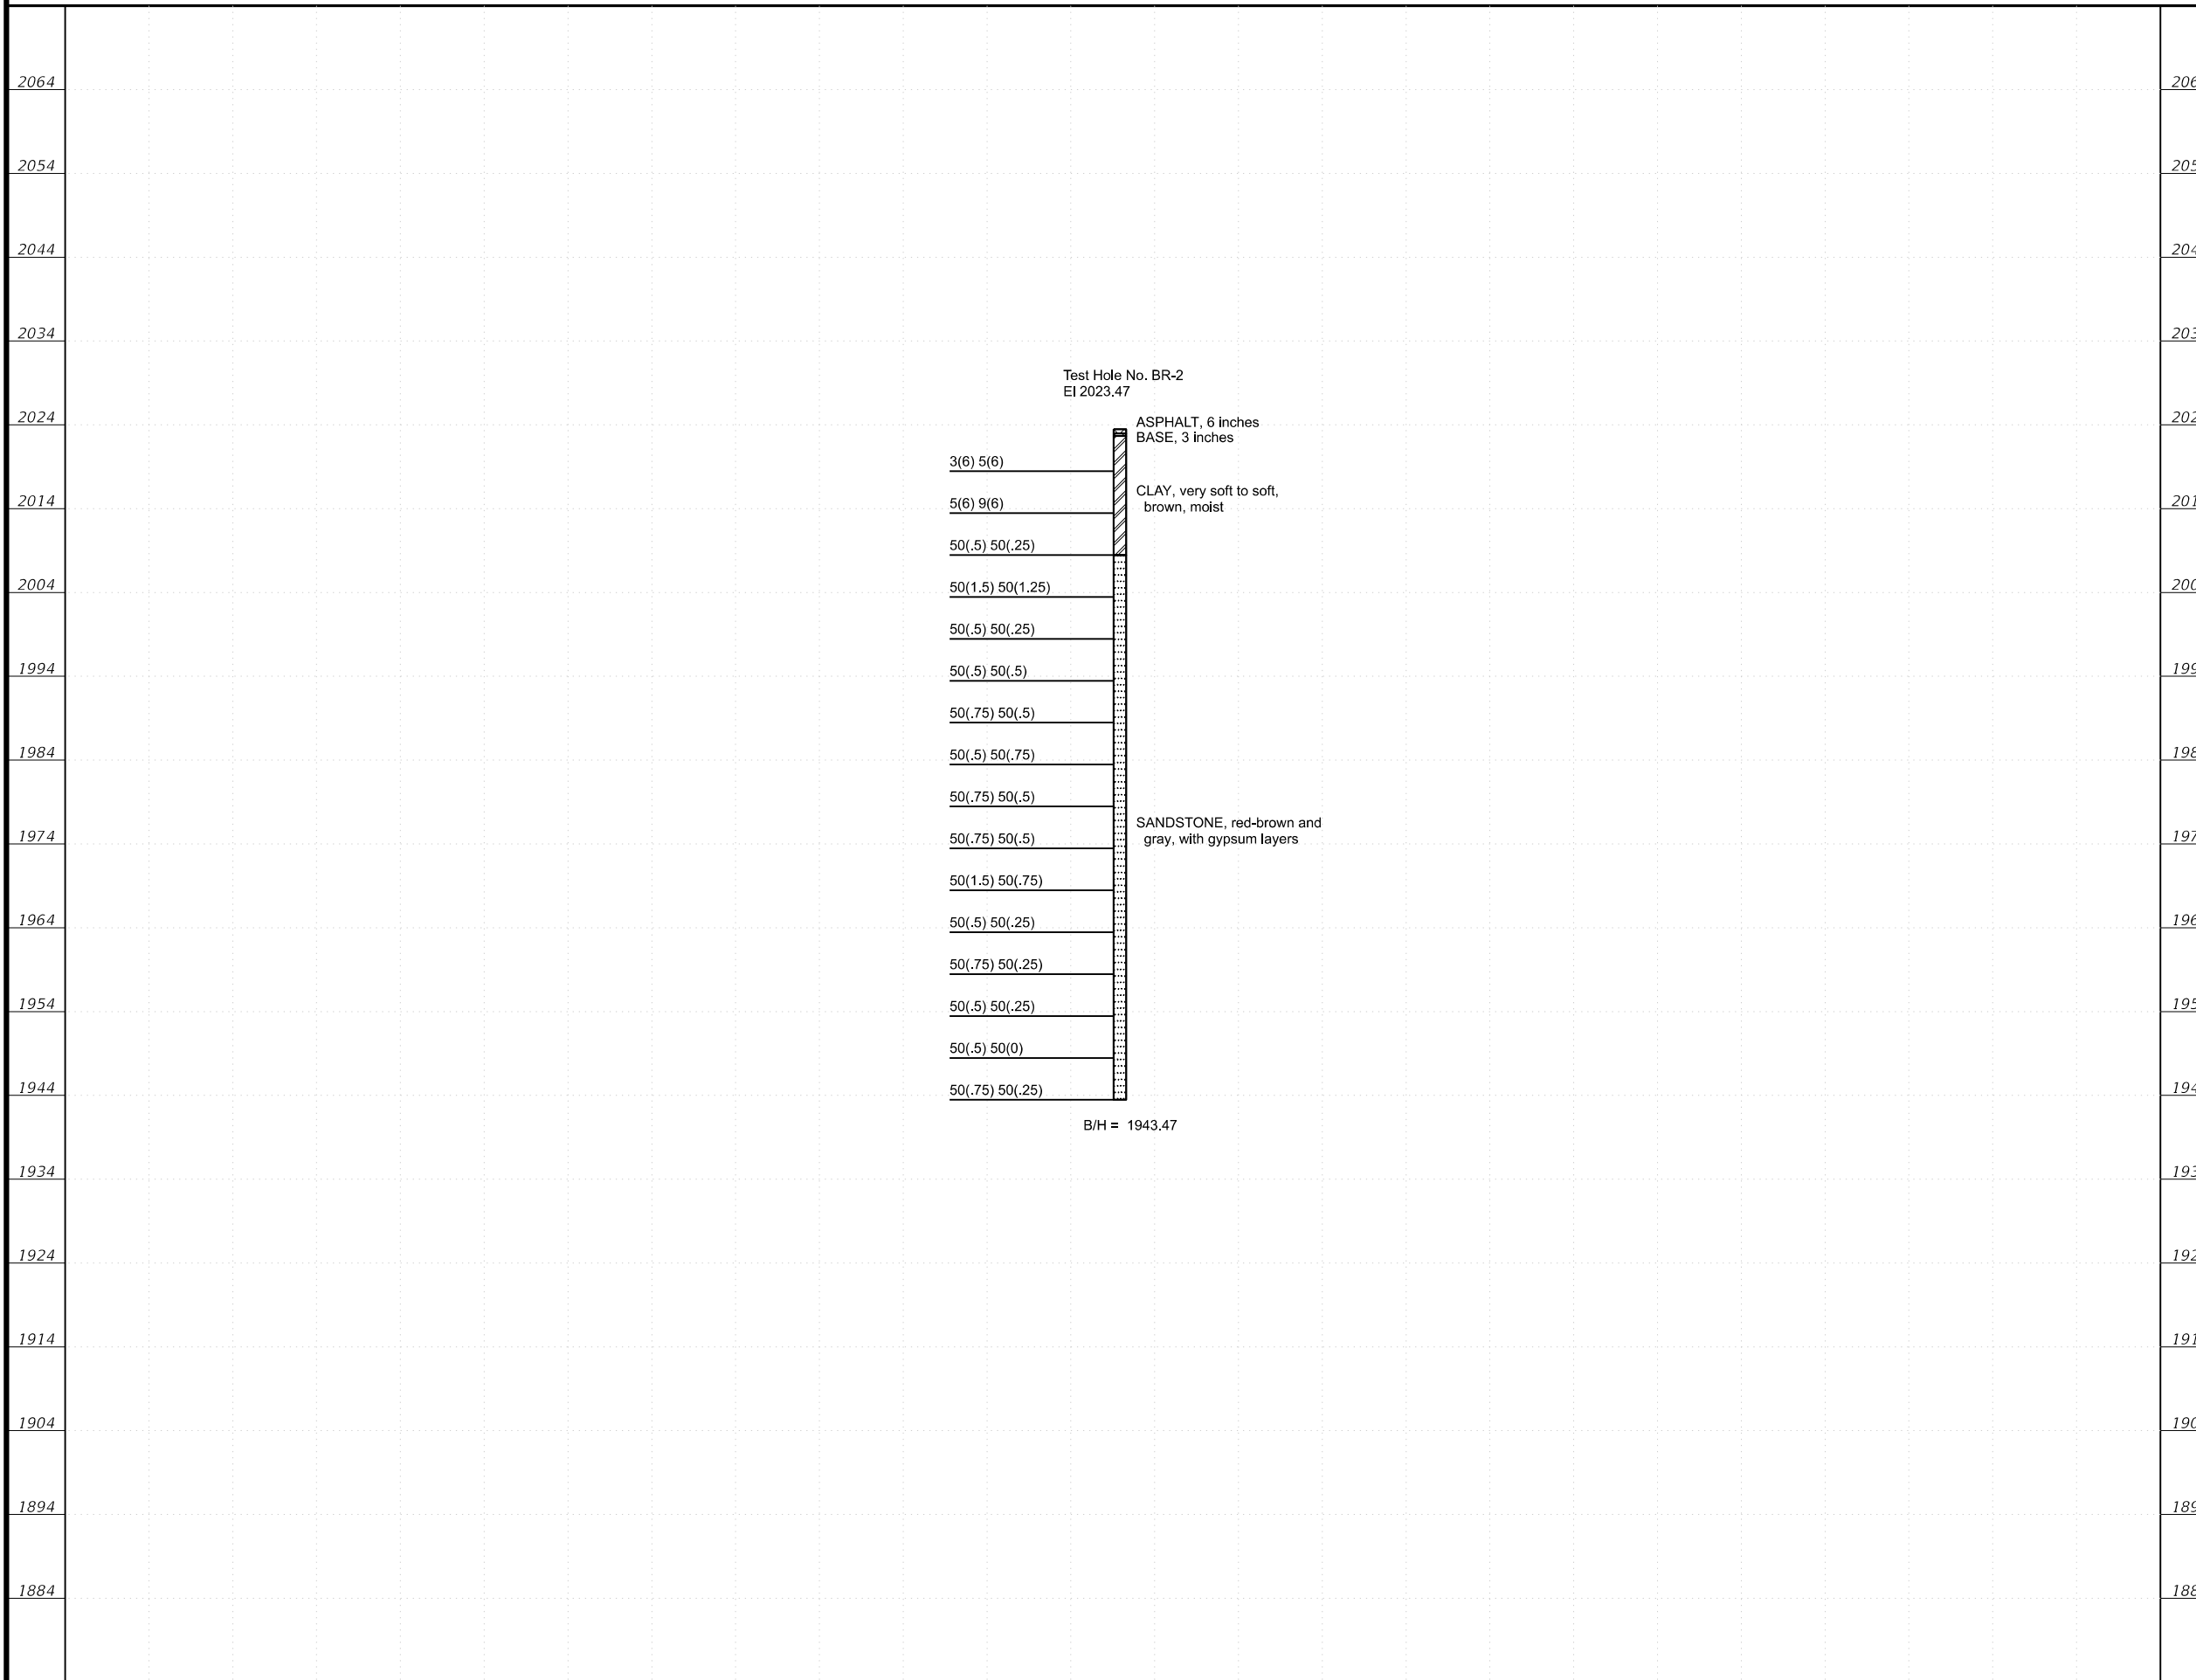

2064

2054

2044

2034

2024

2014

2004

1994

1984

1974

1964

1954

1944

1934


1924

1914


1904

1894

1884



NO.	DATE	REVISION	APPROVED

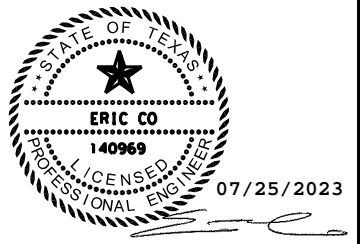

Walter P. Moore and Associates, Inc.  
1301 McKinney, Suite 1100  
Houston, Texas 77010  
Texas Firm Registration No. 1856

**FM 419  
BORING LOGS**

SHEET 2 OF 2

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	SHEET NO.	
6	SEE TITLE SHEET	045	
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD#
1652	01	015	FM 419

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS				DELINEATORS				D & OM DESCRIPTIVE CODES	
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	SINGLE		DOUBLE		
SHEETING	Yellow, White or Red Type B or C reflective sheeting				Yellow, White or Red Type B or C Reflective Sheeting				
NOTE	1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (fix). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.				POST TYPE	WC	YFLX, WFLX	WC	YFLX, WFLX
					MOUNT TYPE	GND	GND, SRF	GND	GND, SRF

**INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX (XX)**  
**NUMBER OF REFLECTORS**  
 S = Single  
 D = Double  
**COLOR OF REFLECTORS**  
 W = White  
 Y = Yellow  
 R = Red  
**REFLECTOR UNIT SIZE**  
 1 or 2  
**TYPE OF POST OR DELINEATOR**  
 WC = Wing Channel Post  
 YFLX = Yellow Flexible Post  
 WFLX = White Flexible Post  
 BRFL = Barrier Reflector  
**TYPE OF MOUNT**  
 GND = Embedded (drivable or set in concrete)  
 CTB = Concrete Barrier Mount  
 GF1 or GF2 = Guard Fence Attachment  
 SRF = Surface Mount  
**DIRECTION**  
 If Required  
 BI = Bi-Directional  
 BR = Bi-Directional with red on back  
**INSTL OM ASSM (OM-XX) (XXXX)XXX (XX)**  
**TYPE OF OBJECT MARKER**  
 1, 2, 3, or 4  
**NUMBER OF REFLECTORS OR DIRECTION**  
 X = 3-Size 2 reflector units (Type 2 only)  
 Y = 1-Size 3 reflector unit (Type 2 only)  
 Z = 3-Size 1 or 1-Size 4 reflector unit(s) (Type 2 only)  
 L = Left Side (Type 3 Object Marker only)  
 R = Right Side (Type 3 Object Marker only)  
 C = Center (Type 3 Object Marker only)  
**TYPE OF POST**  
 WC = Wing Channel Post  
 WFLX = White Flexible Post  
 TWT = Thin Walled Tubing  
**TYPE OF MOUNT**  
 GND = Embedded (drivable)  
 SRF = Surface Mount  
 WAS = Wedge Anchor Steel  
 WAP = Wedge Anchor Plastic  
**DIRECTION**  
 If Required  
 BI = Bi-Directional

OBJECT MARKERS								
DEVICE	Type 1 (OM-1)	Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4
SHEETING	Yellow-Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting	Yellow - Type B or C Sheeting			Alternating acrylic black and retroreflective yellow - Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting			Red -Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting
POST TYPE	TWT	WC	WC	WFLX	TWT			TWT
MOUNT TYPE	WAS, WAP	GND	GND	GND, SRF	WAS, WAP			WAS, WAP

DEPARTMENTAL MATERIAL SPECIFICATIONS	
FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		
DEVICE	GF1	GF2	CTB						
	1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			<b>W1-8</b> SIZE (W x L) 18" x 24" (Conventional) 24" x 30" (Conventional Oversize) 30" x 36" (Expressway) 36" x 48" (Freeway) MOUNTING HEIGHT 4'-0" or 7'-0"				<b>W1-6</b> SIZE (W x L) 48" x 24" (Conventional) 60" x 30" (Expressway & Freeway) MOUNTING HEIGHT 7'-0"	
SHEETING	Yellow, White, Red			NOTE				NOTE:	
NOTE	1. Reflective sheeting shall have a minimum dimension of 3 inches and minimum surface area of 9 square inches.			1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).				Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.	















**DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION**  
**D & OM(1)-20**

FILE: dcm1-20.dgn	DN: TXDOT	CK: TXDOT	DN: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM 419
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	ABL	FISHER	046	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

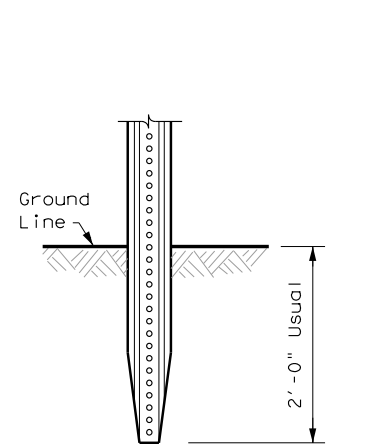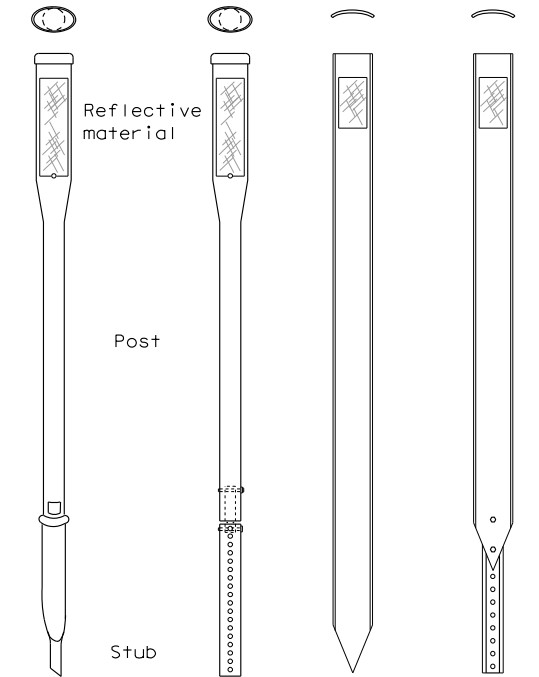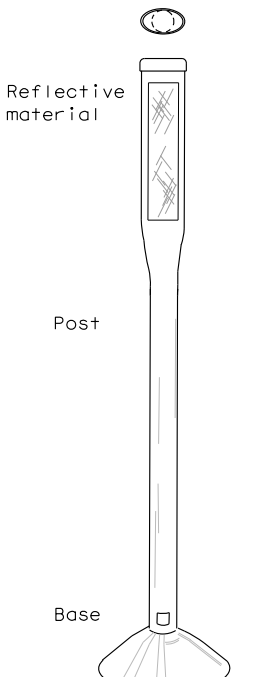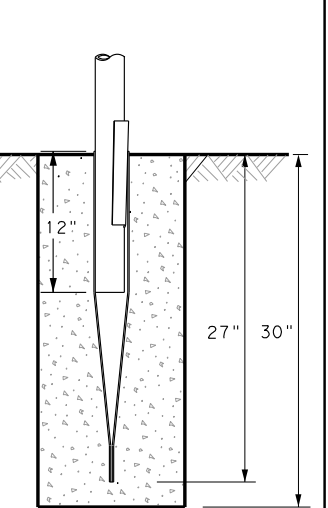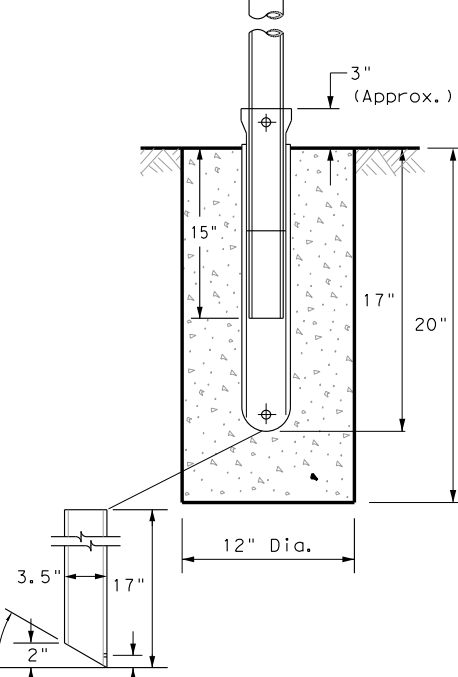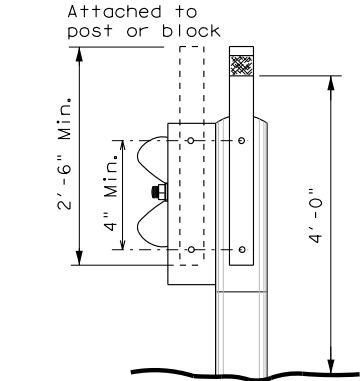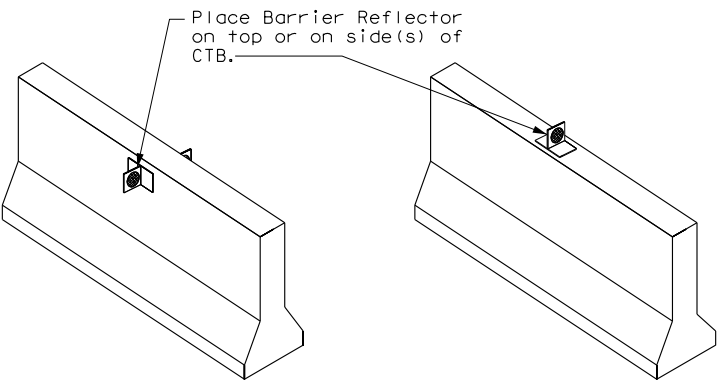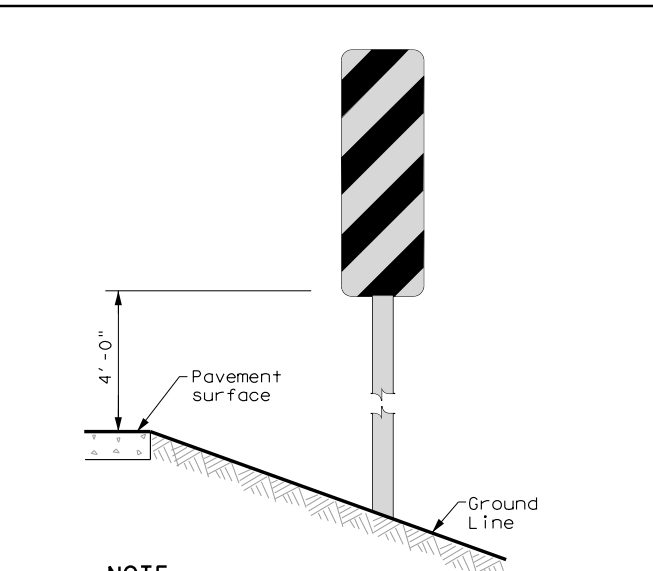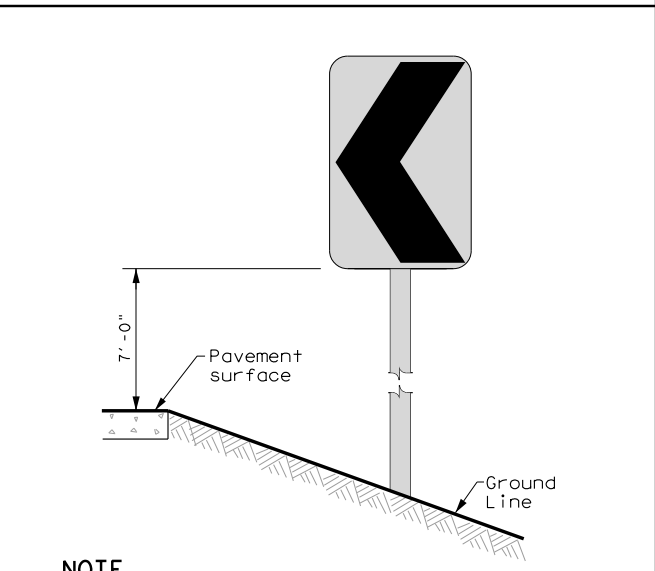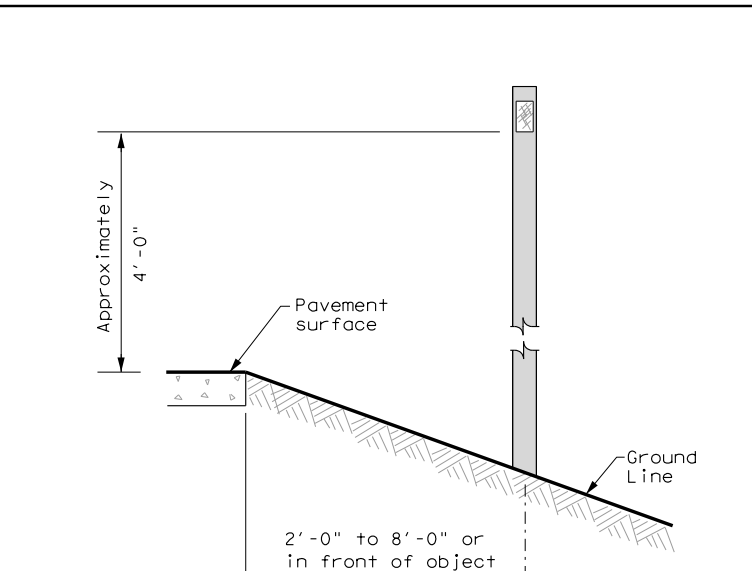POST TYPE AND SUPPORT FOUNDATION DETAILS				TYPE OF BARRIER MOUNTS			
WING CHANNEL (WC)	FLEXIBLE POSTS (YFLX, WFLX)		WEDGE ANCHOR SYSTEMS		GUARD FENCE ATTACHMENT		
GND	GND	SRF	WAS	WAP	GF 1		
							
	EMBEDDED		SURFACE MOUNT	STEEL	PLASTIC	<b>CONCRETE TRAFFIC BARRIER (CTB)</b> 	
<b>NOTES</b> 1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only. 2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.		<b>NOTES</b> 1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices. 2. Install per manufacturer's recommendations. 3. Post length may vary to meet field conditions. 4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.		<b>NOTE</b> 1. Install per manufacturer's recommendations.		<b>GENERAL NOTES</b> 1. Place delineators on a section of roadway at a consistent distance from the edge of pavement. 2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction. 3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible. 4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation. 5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface. 6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.	
<b>TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS</b>		<b>CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN</b>		<b>DELINEATORS AND TYPE 2 OBJECT MARKERS</b>			
							
<b>NOTE</b> Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)		<b>NOTE</b> Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.		See general notes 1, 2 and 3.			



**Texas Department of Transportation**

*Traffic Safety Division Standard*

## DELINEATOR & OBJECT MARKER INSTALLATION

### D & OM(2)-20

FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DN: TxDOT	CK: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM 419
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	ABL	FISHER	047	

20B




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

### MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	• RPMs	• RPMs
15 MPH & 20 MPH	• RPMs and One Direction Large Arrow sign	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	• RPMs and Chevrons


### SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

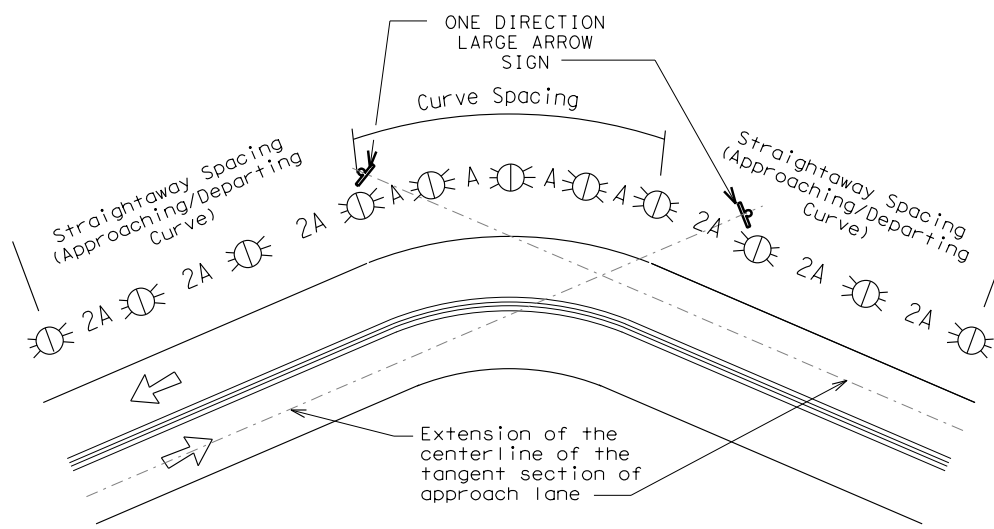

**NOTE**

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

### SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

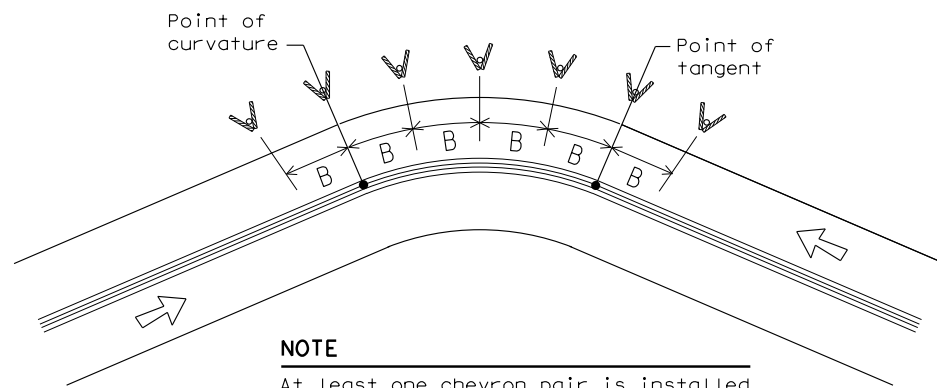

**NOTE**

At least one chevron pair is installed beyond the point of tangent in tangent section.

### DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

### DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

### DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy/Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

**NOTES**

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign



## DELINEATOR & OBJECT MARKER PLACEMENT DETAILS


### D & OM(3)-20

FILE: dom3-20.dgn	DN: TxDOT	CK: TxDOT	DN: TxDOT	CK: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM 419
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	ABL	FISHER	048	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:  
FILE:

**CROSSOVERS**

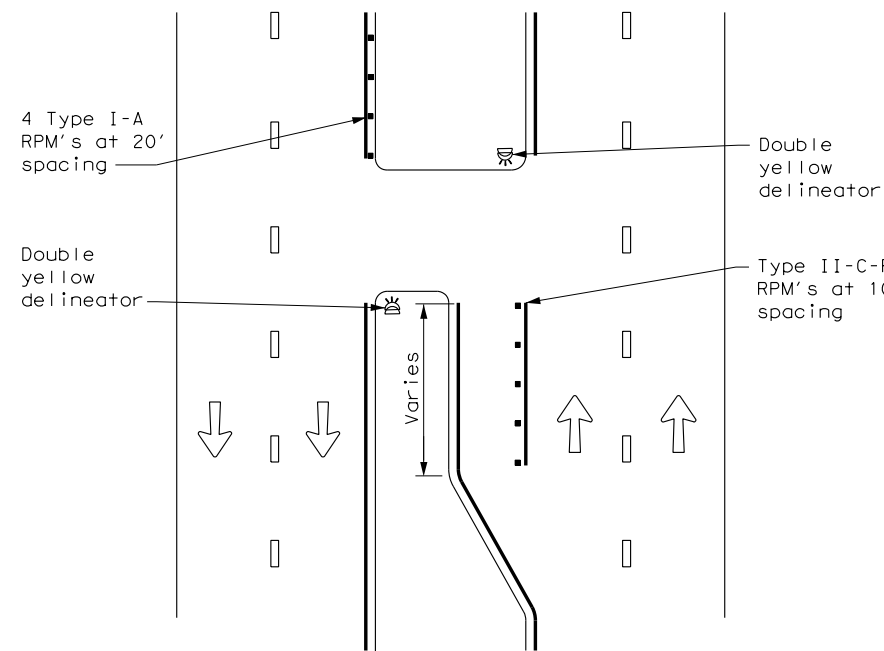


**DETAIL 1**

**FOR CULVERTS WITHOUT MBGF**

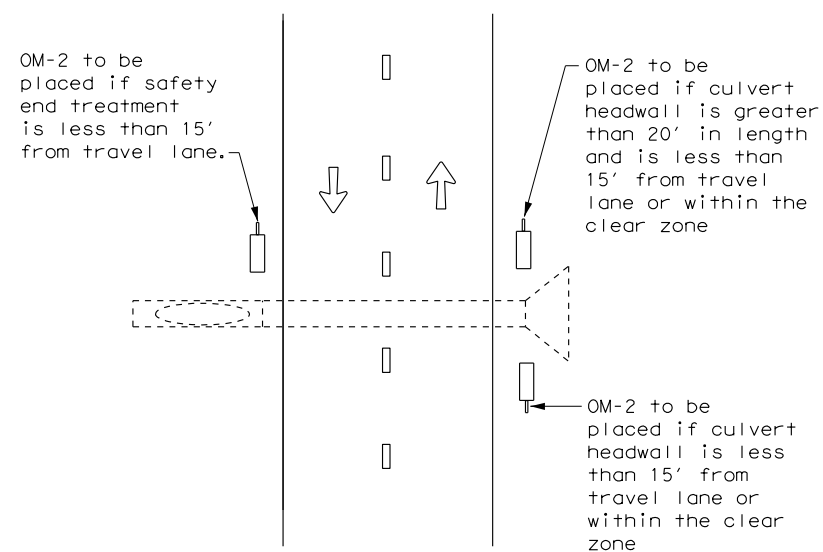


**DETAIL 2**

**FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES**

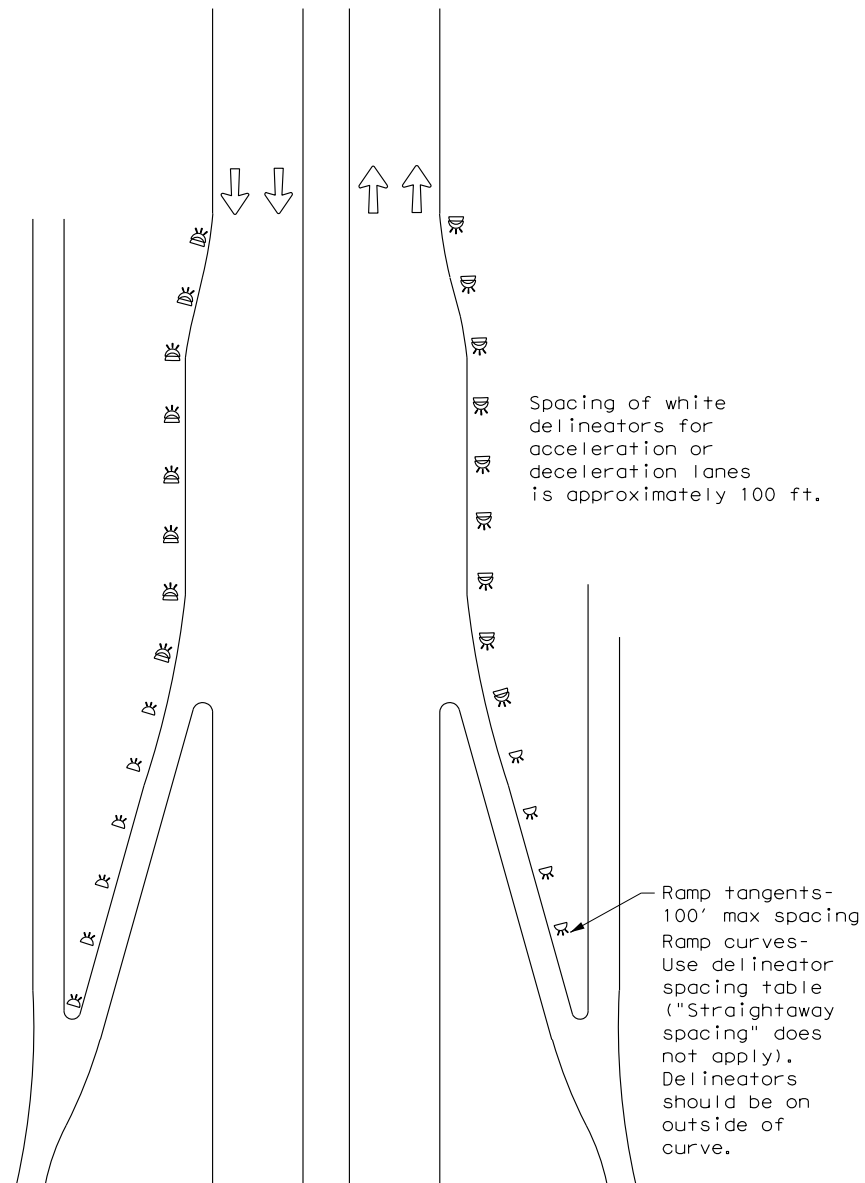


**DETAIL 3**

**TYPICAL APPLICATION OF DEAD END BARRICADE**

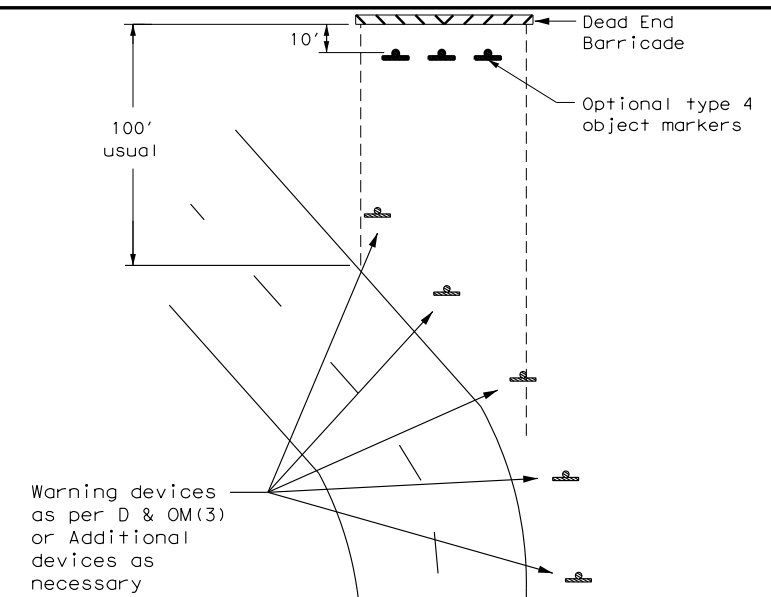

**DETAIL 4**

**TYPICAL DEAD END BARRICADE INSTALLATION**

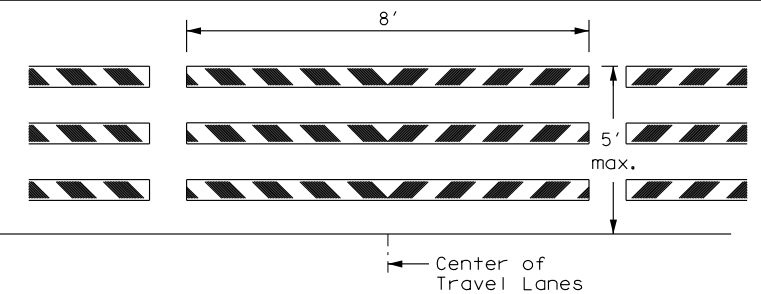

**NOTES**

1. Barricade striping shall be red and white reflective sheeting for all permanent road closures.
2. Barricade striping is red and white sloping toward the center of the roadway.
3. Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

**DETAIL 5**

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator




**DELINEATOR & OBJECT MARKER PLACEMENT DETAILS**

**D & OM(4) -20**


FILE: dom4-20.dgn	DN: TxDOT	CK: TxDOT	DN: TxDOT	CK: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM 419
3-15	DIST	COUNTY	SHEET NO.	
7-20	ABL	FISHER	049	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: FILE:

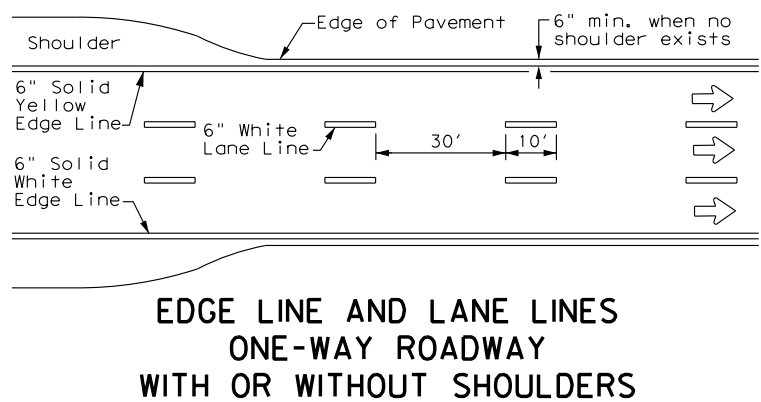


**EDGE LINE AND LANE LINES  
ONE-WAY ROADWAY  
WITH OR WITHOUT SHOULDERS**

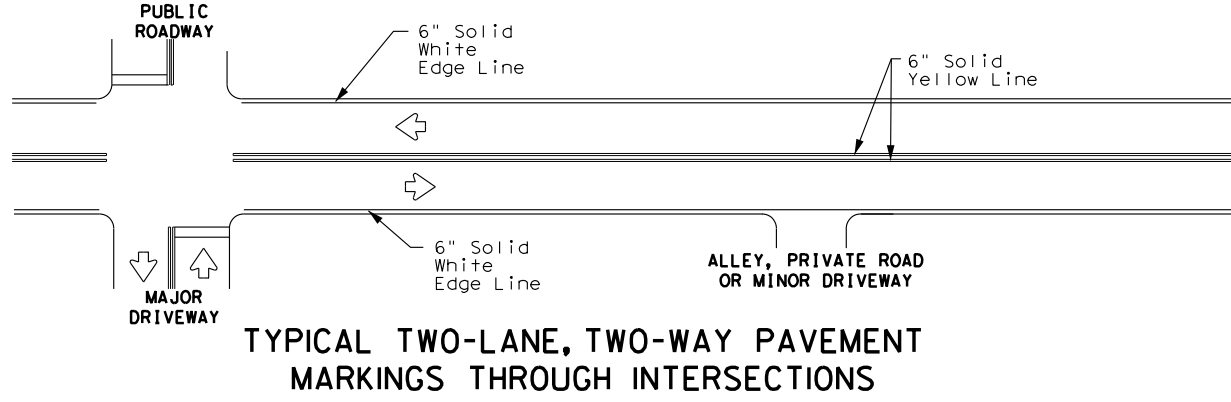

**TYPICAL TWO-LANE, TWO-WAY PAVEMENT  
MARKINGS THROUGH INTERSECTIONS**

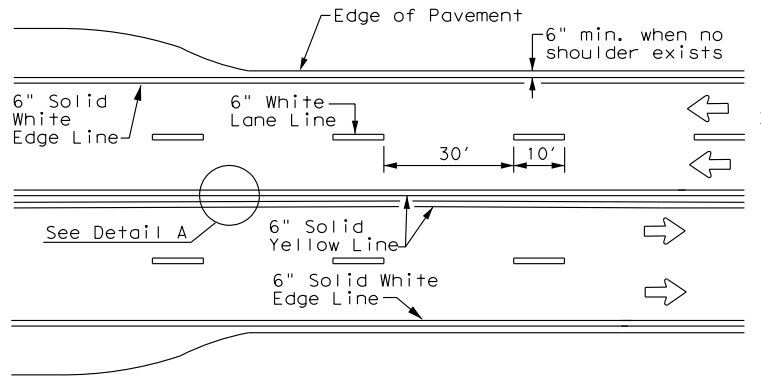


**CENTERLINE AND LANE LINES  
FOUR LANE TWO-WAY ROADWAY  
WITH OR WITHOUT SHOULDERS**

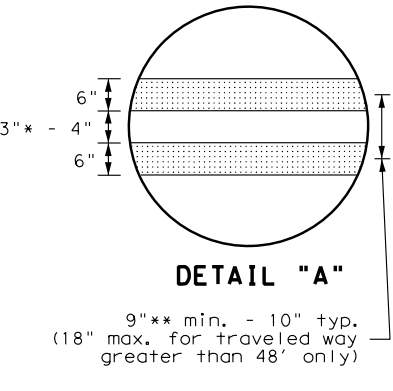


**DETAIL "A"**

9" \*\* min. - 10" typ.  
(18" max. for traveled way greater than 48' only)


\* 2" minimum for restripe projects when approved by the Engineer.  
\*\* 8" minimum for restripe projects when approved by the Engineer.

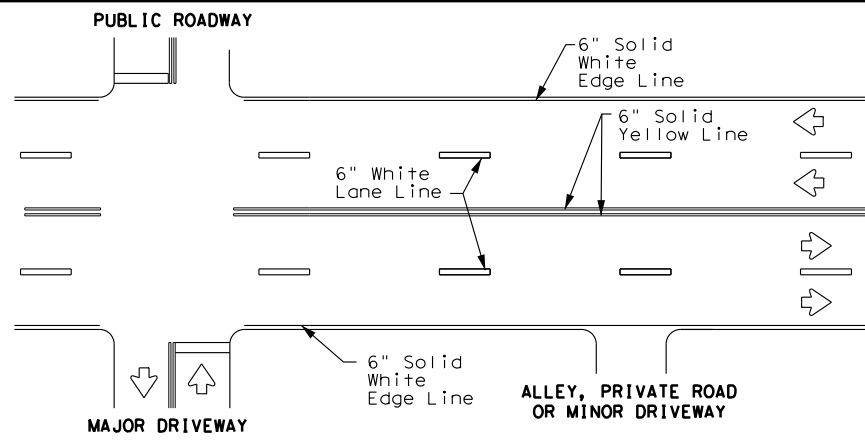

**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT  
MARKINGS THROUGH INTERSECTIONS**

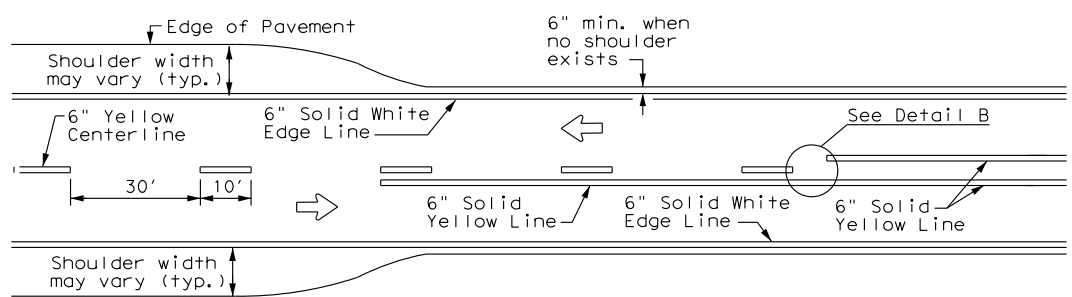


**TWO LANE TWO-WAY ROADWAY  
WITH OR WITHOUT SHOULDERS**

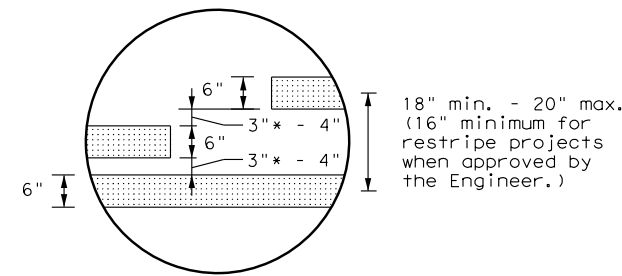


**DETAIL "B"**

\* 2" minimum for restripe projects when approved by the Engineer.



**YIELD LINES**

For posted speed on road being marked equal to or greater than 45 MPH.



For posted speed on road being marked equal to or less than 40 MPH.

**NOTES**


- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

**GENERAL NOTES**

- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

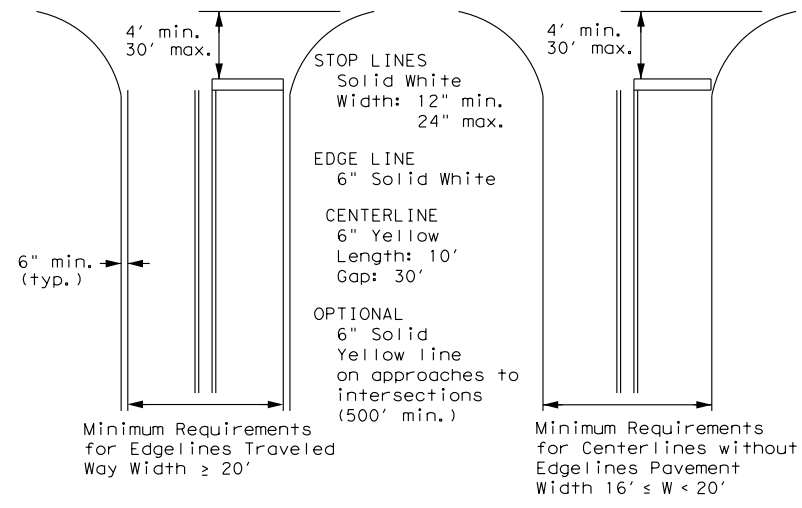

NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

**GUIDE FOR PLACEMENT OF STOP LINES,  
EDGE LINE & CENTERLINE**

Based on Traveled Way and Pavement Widths for Undivided Roadways




**TYPICAL STANDARD  
PAVEMENT MARKINGS**

**PM(1)-22**


FILE: pml-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
11-78 8-00 6-20	DIST	COUNTY	SHEET NO.	
8-95 3-03 12-22	ABL	FISHER	050	
5-00 2-12				

# REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

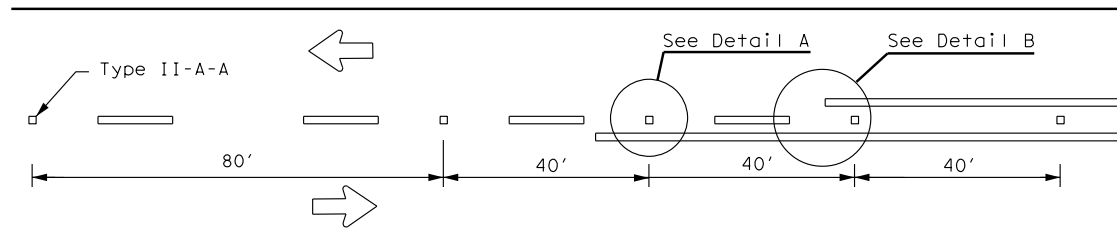

**CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS**

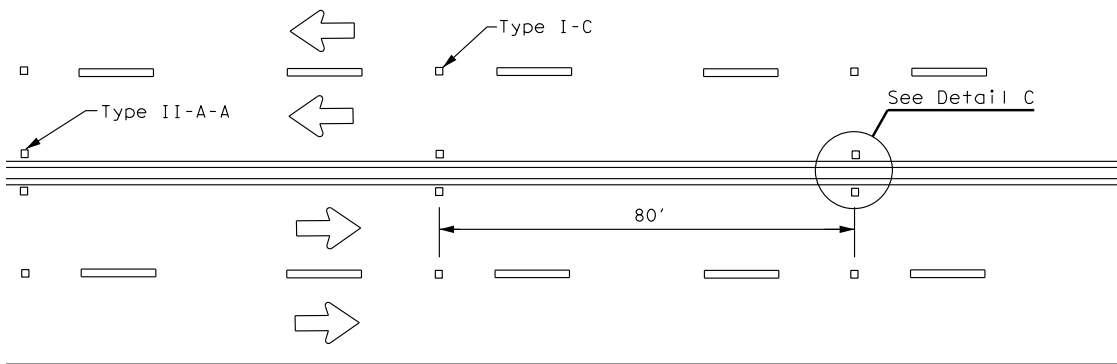


**CENTERLINE & LANE LINES  
FOR FOUR LANE TWO-WAY ROADWAYS**

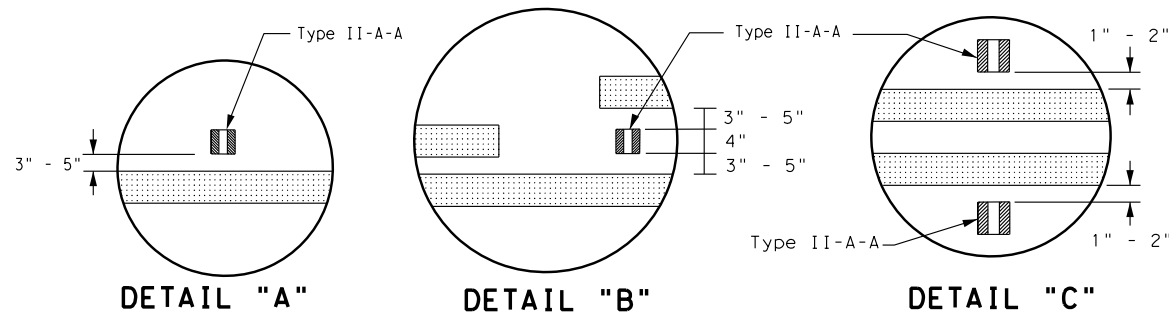


**DETAIL "A"**

**DETAIL "B"**

**DETAIL "C"**


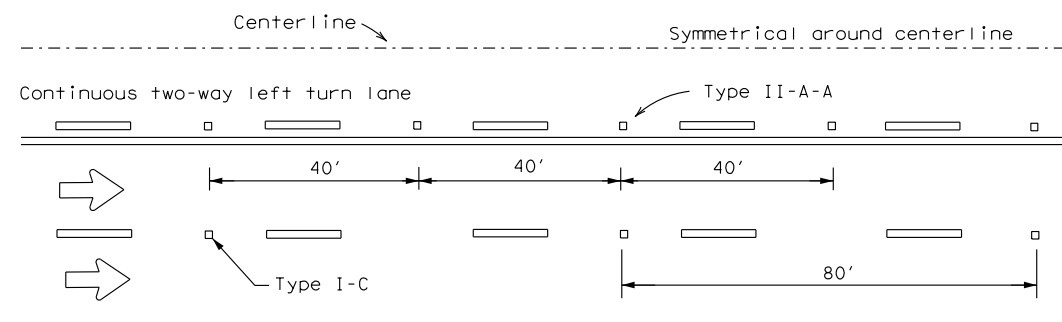


**CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE**

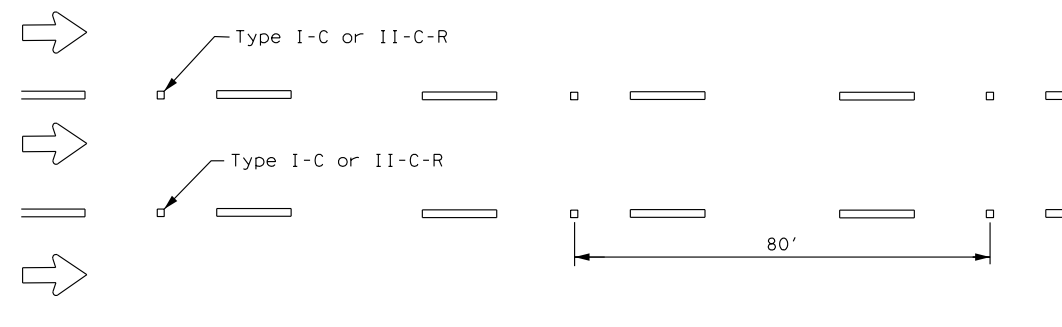

**LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)**


Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.  
See Note 3.

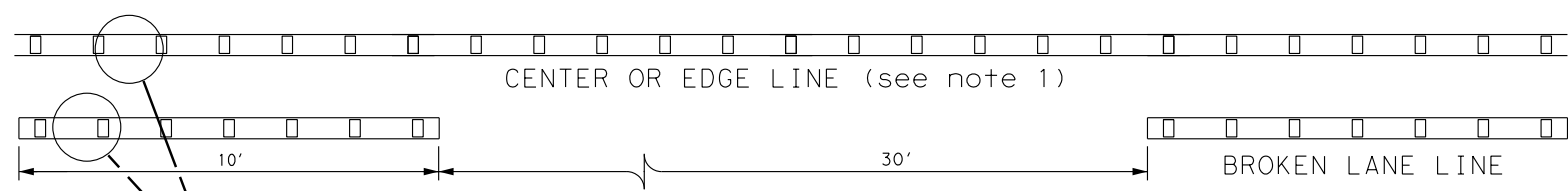

**REFLECTORIZED PROFILE  
PATTERN DETAIL**

USING REFLECTIVE PROFILE PAVEMENT MARKINGS

6" EDGE LINE, 6" CENTERLINE  
OR 6" LANE LINE

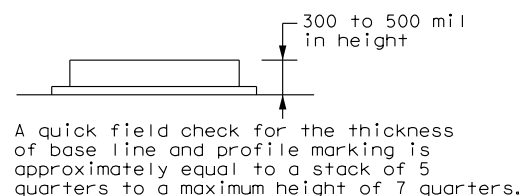


A quick field check for the thickness of base line and profile marking is approximately equal to a stack of 5 quarters to a maximum height of 7 quarters.

**NOTES**


- Edge lines should typically be 6" wide and the materials shall be specified in the plans.
- Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

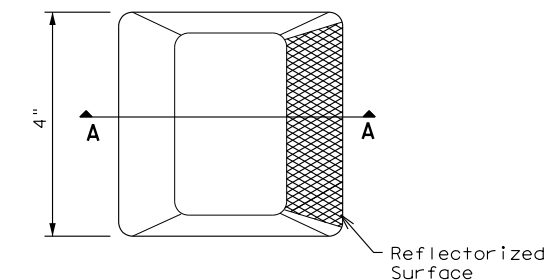

**Type I (Top View)**

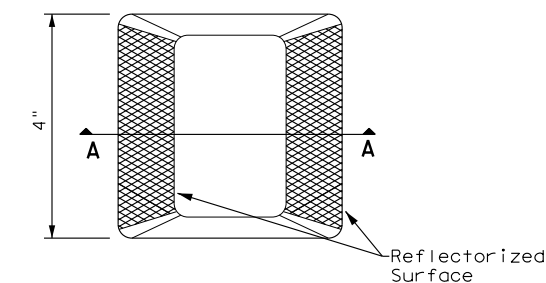

**Type II (Top View)**

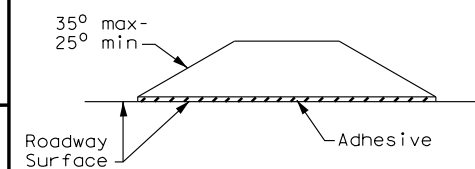

**SECTION A**

**RAISED PAVEMENT MARKERS**



**POSITION GUIDANCE USING  
RAISED MARKERS  
REFLECTORIZED PROFILE  
MARKINGS  
PM(2) - 22**

FILE: pm2-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM419
4-77 8-00 6-20	DIST	COUNTY	SHEET NO.	
4-92 2-10 12-22	ABL	FISHER	051	
5-00 2-12				

DATE:  
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

X

PREPARED BY (NAME OF DESIGNER)  
 DATE: 7/25/2023  
 FILE: c:\user\s\salvadorr\dms45856\FM419\*EPIC.dgn

**I. STORM WATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402**

TPDES TXR 150000: Storm water Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

1.  No Action Required  Required Action

Action No.

- The project disturbs less than one acre of surface area. The contractor is responsible for the PSL as defined in the Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges (2014 Edition, Section 7.6., Page 44). The total disturbed acreage is the combined acreage to be disturbed on the project and the contractors PSL.
- Prevent storm water pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
- Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
- Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
- When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

**II. WORK IN OR NEAR STREAMS, WATER BODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404**

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required  
 Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)  
 Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)  
 Individual 404 Permit Required  
 Other Nationwide Permit Required: NWP# \_\_\_\_\_

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

- 
- 

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

<b>Erosion</b>	<b>Sedimentation</b>	<b>Post-Construction TSS</b>
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input checked="" type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Sedimentation Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw & Hay Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost/Mulch
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Sand Filter Systems
<input checked="" type="checkbox"/> Temporary Erosion Control Logs (BIOLOGS)	<input type="checkbox"/> Temporary Erosion Control Logs (BIOLOGS)	<input type="checkbox"/> Temporary Erosion Control Logs (BIOLOGS)
<input type="checkbox"/> Preservation of Natural Resources	<input type="checkbox"/> Sediment Traps	<input checked="" type="checkbox"/> Permanent Vegetation (Planting, Sodding, or Seeding)
<input type="checkbox"/> Construction Exits	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

**III. CULTURAL RESOURCES**

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required  Required Action

Action No.

- 
- 
- 
- 

**IV. VEGETATION RESOURCES**

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required  Required Action

Action No.

- Comply with E013112 on use of Native Vegetation.
- 
- 
- 

**V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.**

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

- No Action Required  Required Action

Action No.

- Comply with Migratory Bird Treaty Act (MGBTA) on protection of birds.
- 
- 
- 

**LIST OF ABBREVIATIONS**

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Storm water Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

**VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES**

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- \* Dead or distressed vegetation (not identified as normal)
- \* Trash piles, drums, canister, barrels, etc.
- \* Undesirable smells or odors
- \* Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes  No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes  No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required  Required Action

Action No.

- 
- 
- 

**VII. OTHER ENVIRONMENTAL ISSUES**


(includes regional issues such as Edwards Aquifer District, etc.)

- No Action Required  Required Action

Action No.

- 
- 
- 

FM 419  
 ENVIRONMENTAL PERMITS,  
 ISSUES AND COMMITMENTS  
 EPIC



© 2023 Texas Department of Transportation

NO SCALE		SHEET 1 OF 1	
FHWA DIVISION	PROJECT NO.	HIGHWAY NO.	
6	SEE TITLE SHEET	FM 419	
STATE	COUNTY	SHEET NO.	
TEXAS	FISHER	052	
DISTRICT	CONTROL	SECTION	JOB
ABL	1652	01	015

**STORMWATER POLLUTION PREVENTION PLAN (SWP3):**

This SWP3 has been developed in accordance with TxDOT policy for projects disturbing less than 1 acre of soil, and not part of a larger common plan of development.

For all projects with any soil disturbing activities, TxDOT will maintain a SWP3 with all pertinent records, correspondence, environmental documents, etc. at the project field office. If no field office is available, then this SWP3 shall be kept at the appropriate TxDOT Area Office.

This SWP3 is consistent with requirements specified in applicable stormwater plans, and the project's environmental permits, issues, and commitments (EPICs).

**1.0 SITE/PROJECT DESCRIPTION**

**1.1 PROJECT CONTROL SECTION JOB (CSJ):**

1652-01-015

**1.2 PROJECT LIMITS:**

From: FM 419 at Draw Creek

To:

**1.3 PROJECT COORDINATES:**

BEGIN: (Lat) 32°40'35.1624"N, (Long) 100°27'09.6871"W

END: (Lat) 32°40'33.9903"N, (Long) 100°27'15.0337"W

**1.4 TOTAL PROJECT AREA (Acres):** 0.85

**1.5 TOTAL AREA TO BE DISTURBED (Acres):** 0.30

**1.6 NATURE OF CONSTRUCTION ACTIVITY:**

Bridge replacement

**1.7 MAJOR SOIL TYPES:**

Soil Type	Description
Ac-Acme-Cottonwood complex, 0 to 3 percent slopes	Well drained, Acme-Low rate of runoff, Cottonwood-Medium rate of runoff, Class 1 erosion
La-Westola fine sandy loam, dry, 0 to 1 percent slopes, frequent flooded	Well drained, Negligible rate of runoff, No erosion, Deposition
CaB-Paducah loam, 1 to 3 percent slopes	Well drained, Low rate of runoff, Class 1 erosion

**1.8 PROJECT SPECIFIC LOCATIONS (PSLs):**

PSLs must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. PSLs may be identified during preconstruction meetings or during the construction process. Please choose from the options below:

- PSLs determined during preconstruction meeting
- PSLs determined during construction
- No PSLs planned for construction

Type	Sheet #s

All off-ROW PSLs required by the Contractor are the Contractor's responsibility. The Contractor shall secure all permits required by local, state, federal laws for off-ROW PSLs. The contractor shall provide diagrams, areas of disturbance, acreage, and BMPs for all off-ROW PSLs within one mile of the project.

**1.9 CONSTRUCTION ACTIVITIES:**

(Use the following list as a starting point when developing the Construction Activity Schedule and Ceasing Record in Attachment 2.3.)

- X Mobilization
- X Install sediment and erosion controls
- X Blade existing topsoil into windrows, prep ROW, clear and grub
- X Remove existing pavement
- X Grading operations, excavation, and embankment
- X Excavate and prepare subgrade for proposed pavement widening
- X Remove existing culverts, safety end treatments (SETs)
  - Remove existing metal beam guard fence (MBGF), bridge rail
- X Install proposed pavement per plans
- X Install culverts, culvert extensions, SETs
- X Install mow strip, MBGF, bridge rail
  - Place flex base
- X Rework slopes, grade ditches
- X Blade windrowed material back across slopes
- X Revegetation of unpaved areas
- X Achieve site stabilization and remove sediment and erosion control measures

Other: \_\_\_\_\_  
 Other: \_\_\_\_\_  
 Other: \_\_\_\_\_

**1.10 POTENTIAL POLLUTANTS AND SOURCES:**

- X Sediment laden stormwater from stormwater conveyance over disturbed area
- X Fuels, oils, and lubricants from construction vehicles, equipment, and storage
- X Solvents, paints, adhesives, etc. from various construction activities
- X Transported soils from offsite vehicle tracking
- X Construction debris and waste from various construction activities
- X Contaminated water from excavation or dewatering pump-out water
- X Sanitary waste from onsite restroom facilities
- X Trash from various construction activities/receptacles
  - Long-term stockpiles of material and waste
  - Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**1.11 RECEIVING WATERS:**

Receiving waters must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. Include Segment # for receiving waters.

Tributaries	Classified Waterbody
Draw Creek, Cottonwood Creek	(*) Clear Fork Brazos River (1232) (Bacteria in water)
<b>NO TMDLs or I-PLANS WERE IDENTIFIED</b>	

\* Add (\*) for impaired waterbodies with pollutant in ( ).

**1.12 ROLES AND RESPONSIBILITIES: TxDOT**

- X Development of plans and specifications
- X Perform SWP3 inspections
- X Maintain SWP3 records and update to reflect daily operations
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**1.13 ROLES AND RESPONSIBILITIES: CONTRACTOR**

- X Day To Day Operational Control
- X Maintain schedule of major construction activities
- X Install, maintain and modify BMPs
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_



**STORMWATER POLLUTION PREVENTION PLAN (SWP3) (Less Than 1 Acre)**



FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
6	SEE TITLE SHEET			053
STATE	STATE DIST.	COUNTY		
TEXAS	ABL	FISHER		
CONT.	SECT.	JOB	HIGHWAY NO.	
1652	01	015	FM 419	



**STORMWATER POLLUTION PREVENTION PLAN (SWP3):**

**2.0 BEST MANAGEMENT PRACTICES (BMPs) AND CONTROLS, INSPECTION, AND MAINTENANCE**

The Contractor shall be the responsible party for implementing the BMPs described herein and for complying with the SWP3 for control of erosion and sedimentation during day-to-day operations. The Contractor shall implement changes to this SWP3 approved by TxDOT within the times specified in this SWP3 or the CGP.

**2.1 EROSION CONTROL AND SOIL STABILIZATION BMPs:**

**T / P**

- Protection of Existing Vegetation
- Vegetated Buffer Zones
- Soil Retention Blankets
- Geotextiles
- Mulching/ Hydromulching
- Soil Surface Treatments
- Temporary Seeding
- Permanent Planting, Sodding or Seeding
- Biodegradable Erosion Control Logs
- Rock Filter Dams/ Rock Check Dams
- Vertical Tracking
- Interceptor Swale
- Riprap
- Diversion Dike
- Temporary Pipe Slope Drain
- Embankment for Erosion Control
- Paved Flumes
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**2.2 SEDIMENT CONTROL BMPs:**

**T / P**

- Biodegradable Erosion Control Logs
- Dewatering Controls
- Inlet Protection
- Rock Filter Dams/ Rock Check Dams
- Sandbag Berms
- Sediment Control Fence
- Stabilized Construction Exit
- Floating Turbidity Barrier
- Vegetated Buffer Zones
- Vegetated Filter Strips
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

**2.3 PERMANENT CONTROLS:**

(Coordinate post-construction BMPs with appropriate TxDOT maintenance sections.)

BMPs To Be Left In Place Post Construction:

Type	Stationing	
	From	To

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

**2.4 OFFSITE VEHICLE TRACKING CONTROLS:**

- Excess dirt/mud on road removed daily
- Haul roads dampened for dust control
- Loaded haul trucks to be covered with tarpaulin
- Stabilized construction exit
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**2.5 POLLUTION PREVENTION MEASURES:**

- Chemical Management
- Concrete and Materials Waste Management
- Debris and Trash Management
- Dust Control
- Sanitary Facilities
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**2.6 VEGETATED BUFFER ZONES:**

Natural vegetated buffers shall be maintained as feasible to protect adjacent surface waters. If vegetated natural buffer zones are not feasible due to site geometry, the appropriate additional sediment control measures have been incorporated into this SWP3.

Type	Stationing	
	From	To

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

**2.7 ALLOWABLE NON-STORMWATER DISCHARGES:**


- Fire hydrant flushings
- Irrigation drainage
- Pavement washwater (where spills or leaks have not occurred, and detergents are not used)
- Potable water sources
- Springs
- Uncontaminated groundwater
- Water used to wash vehicles or control dust
- Other allowable non-stormwater discharges as allowed by TPDES GP TXR150000.

**2.8 INSPECTIONS:**

All disturbed areas and erosion and sediment control devices shall be inspected at least once every seven (7) days. Inspections shall be performed by TxDOT as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SWP3 .

**2.9 MAINTENANCE:**

Control measures shall be properly installed according to specifications. If it is determined that a BMP or control measure is not operating effectively, maintenance must be accomplished as soon as possible and before the next anticipated rain event, but in no case later than 7 calendar days after being able to access the site. Maintenance shall be performed by the Contractor as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SWP3.

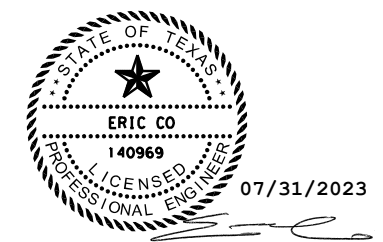

**STORMWATER POLLUTION PREVENTION PLAN (SWP3) (Less Than 1 Acre)**









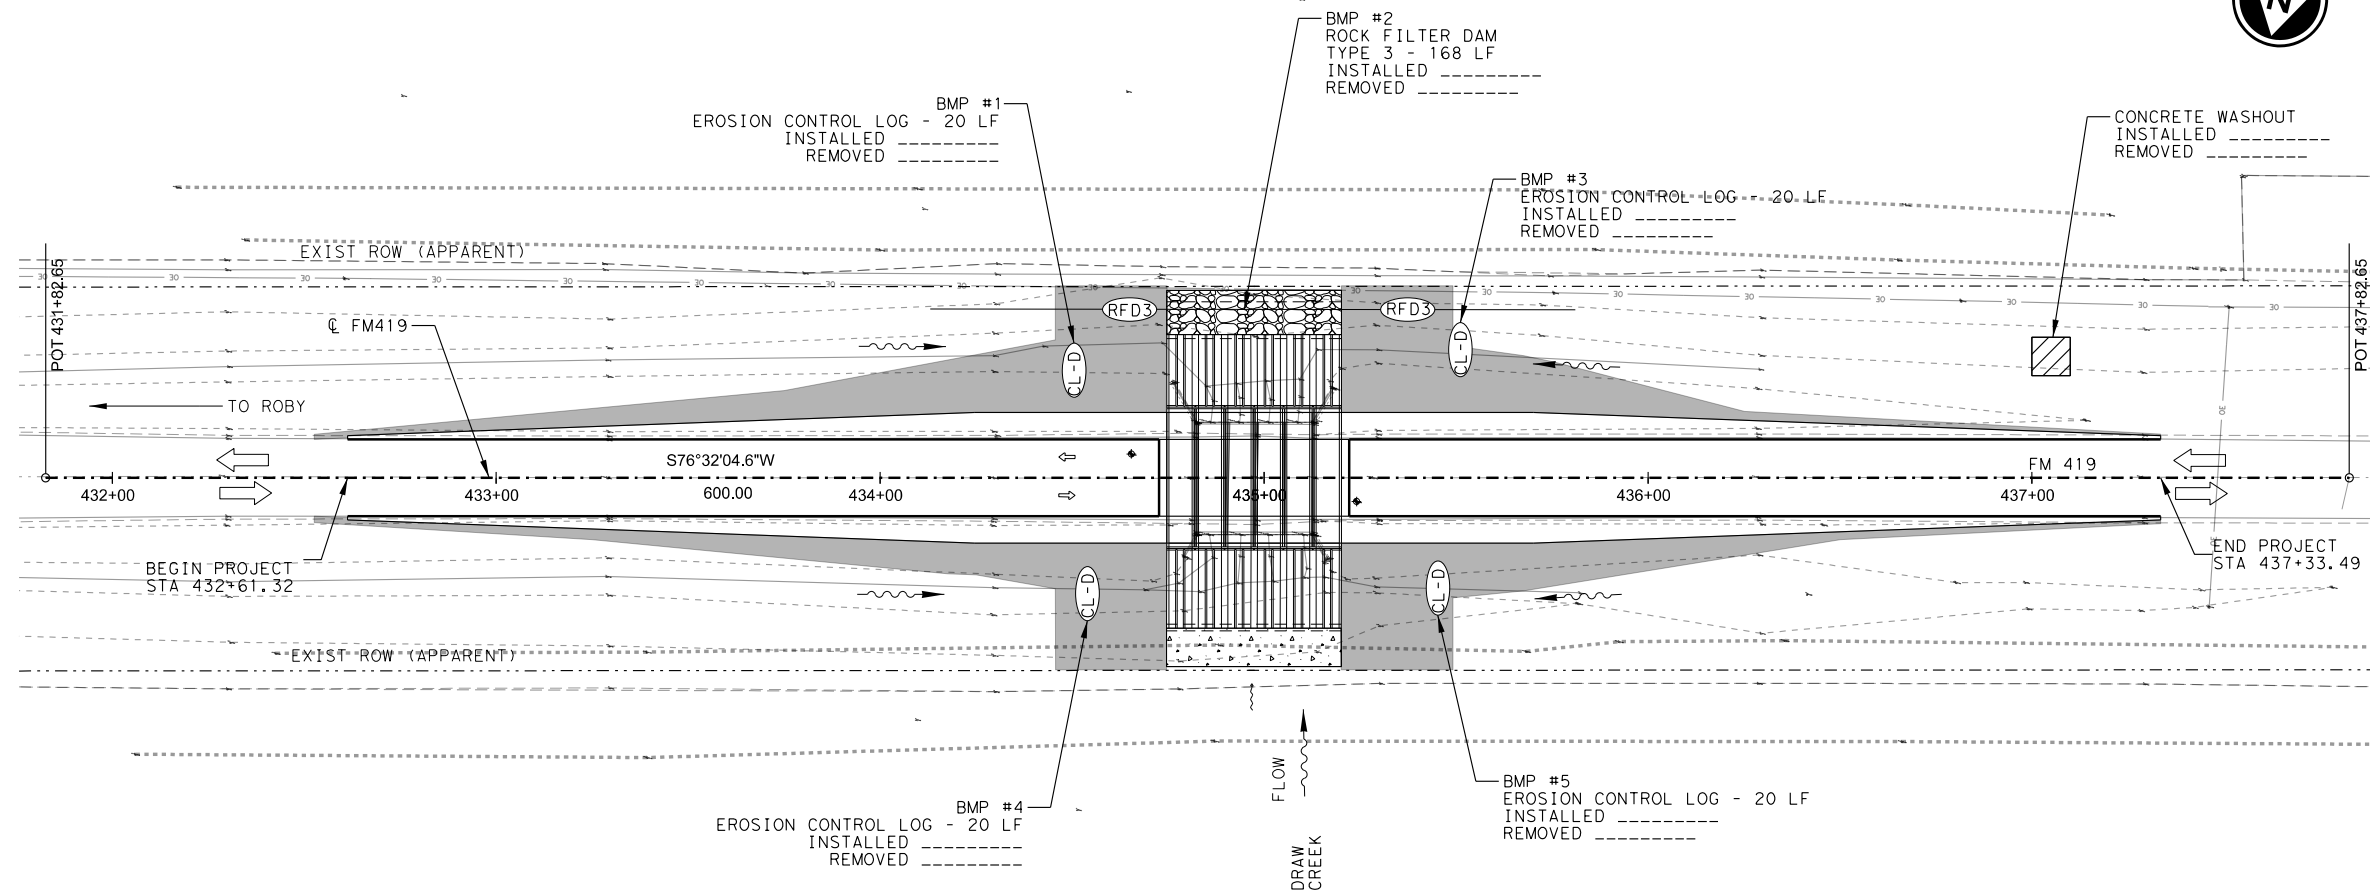
FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
6	SEE TITLE SHEET			054
STATE	STATE DIST.	COUNTY		
TEXAS	ABL	FISHER		
CONT.	SECT.	JOB	HIGHWAY NO.	
1652	01	015	FM 419	

**NOTES:**


1. EROSION CONTROL QUANTITIES LISTED ARE APPROXIMATE AND MAY NEED TO BE VARIED TO MEET FIELD CONDITIONS.

**LEGEND**

-  EROSION CONTROL LOG - DAM
-  ROCK FILTER DAM TYPE 3
-  DRAINAGE FLOW ARROWS
-  CONCRETE WASHOUT
-  SEEDING



NO.	DATE	REVISION	APPROVED

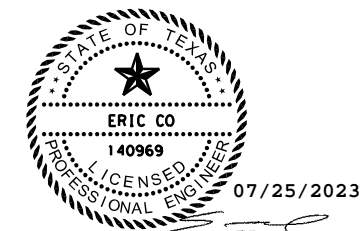

**walter p moore**  
 Walter P. Moore and Associates, Inc.  
 1301 McKinney, Suite 1100  
 Houston, Texas 77010  
 Texas Firm Registration No. 1856

**FM 419  
 ENVIRONMENTAL LAYOUT**




SHEET 1 OF 1			
FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	SEE TITLE SHEET		055
STATE	DIST.	COUNTY	
TX	ABL	FISHER	
CONT.	SECT.	JOB	STREET/ROAD:
1652	01	015	FM 419

\$\USER\$

\$TIMES

\$DATE\$  
 \$FILE\$


# Tx DOT PROJECT SWP3 INFORMATION

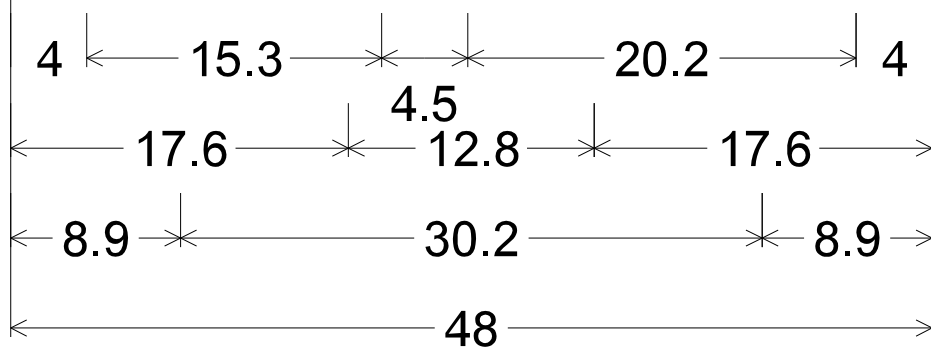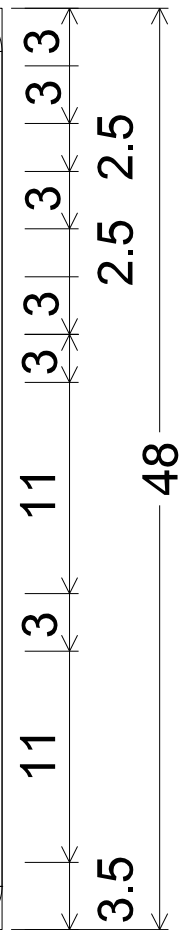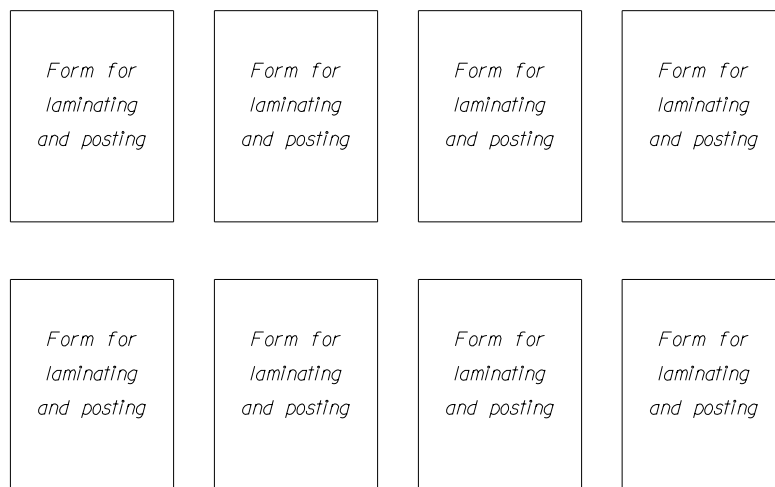

2.3" Radius, 0.9" Border, White on Blue;  
 [TxDOT PROJECT] E Mod;  
 [SWP3] E Mod;  
 [INFORMATION] E Mod;

**NOTE:**

The Forms needed for laminating and posting to the SWP3 Notification Board will be provided by the Engineer. The total number of forms may vary. Notification Boards are to be constructed from Plywood, 1/2 or 5/8-inch thick, in accordance with TxDOT Departmental Material Specification (DMS)-7100. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The sign will be placed at a location within the right-of-way but outside the clear zone as directed by the Engineer. This work will not be paid for directly, but will be considered subsidiary to other items.

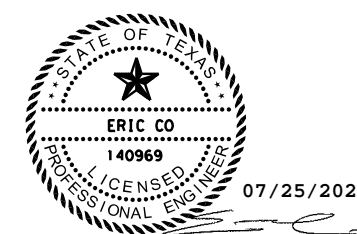

### SWP3 NOTIFICATION BOARD DETAIL




NO SCALE SHEET 1 OF 1


FHWA DIVISION	PROJECT NO.		HIGHWAY NO.	
6	SEE TITLE SHEET		FM 419	
STATE	COUNTY		SHEET NO.	
TEXAS	FISHER		<b>056</b>	
DISTRICT	CONTROL	SECTION		JOB
ABL	1652	01		015

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE  
FILE

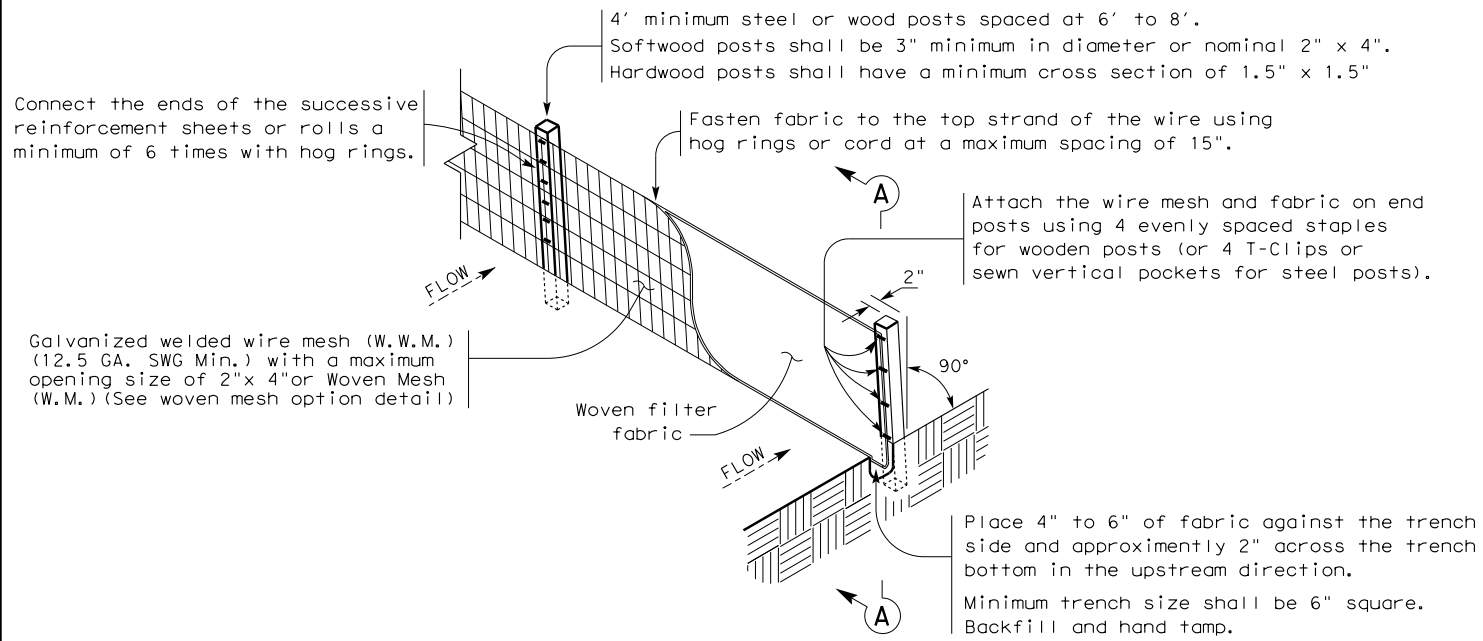

**TEMPORARY SEDIMENT CONTROL FENCE**

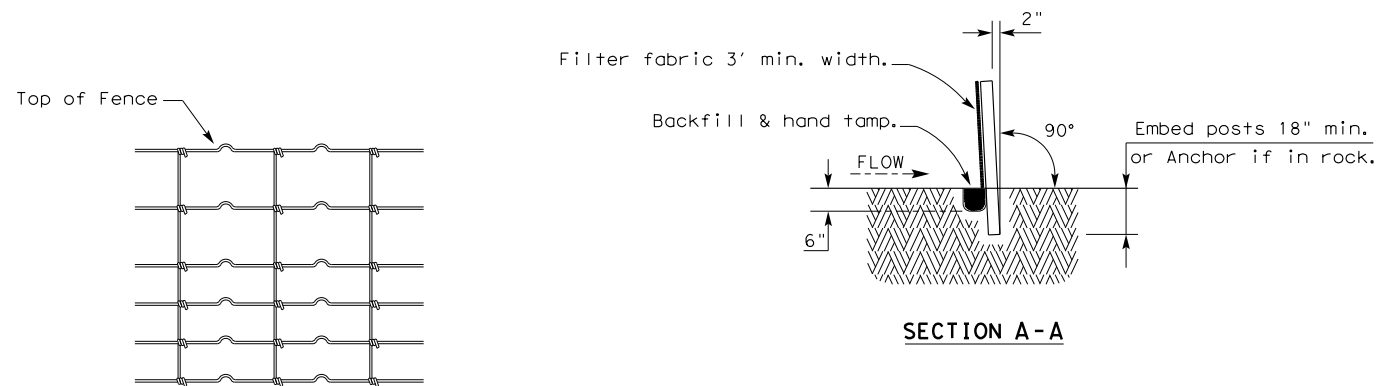

**HINGE JOINT KNOT WOVEN MESH (OPTION) DETAIL**

Galvanized hinge joint knot woven mesh (12.5 GA. SWG Min.) requires a minimum of five horizontal wires spaced at a maximum of 12 inches apart and all vertical wires spaced at a maximum of 12 inches apart.

**SEDIMENT CONTROL FENCE USAGE GUIDELINES**

A sediment control fence may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A 2 year storm frequency may be used to calculate the flow rate to be filtered.

Sediment control fence should be sized to filter a maximum flow through rate of 100 GPM/FT<sup>2</sup>. Sediment control fence is not recommended to control erosion from a drainage area larger than 2 acres.


**LEGEND**

Sediment Control Fence



**GENERAL NOTES**

1. Vertical tracking is required on projects where soil distributing activities have occurred unless otherwise approved.
2. Perform vertical tracking on slopes to temporarily stabilize soil.
3. Provide equipment with a track undercarriage capable of producing linear soil impressions measuring a minimum of 12" in length by 2" to 4" in width by 1/2" to 2" in depth.
4. Do not exceed 12" between track impressions.
5. Install continuous linear track impressions where the minimum 12" length impressions are perpendicular to the slope or direction of water flow.

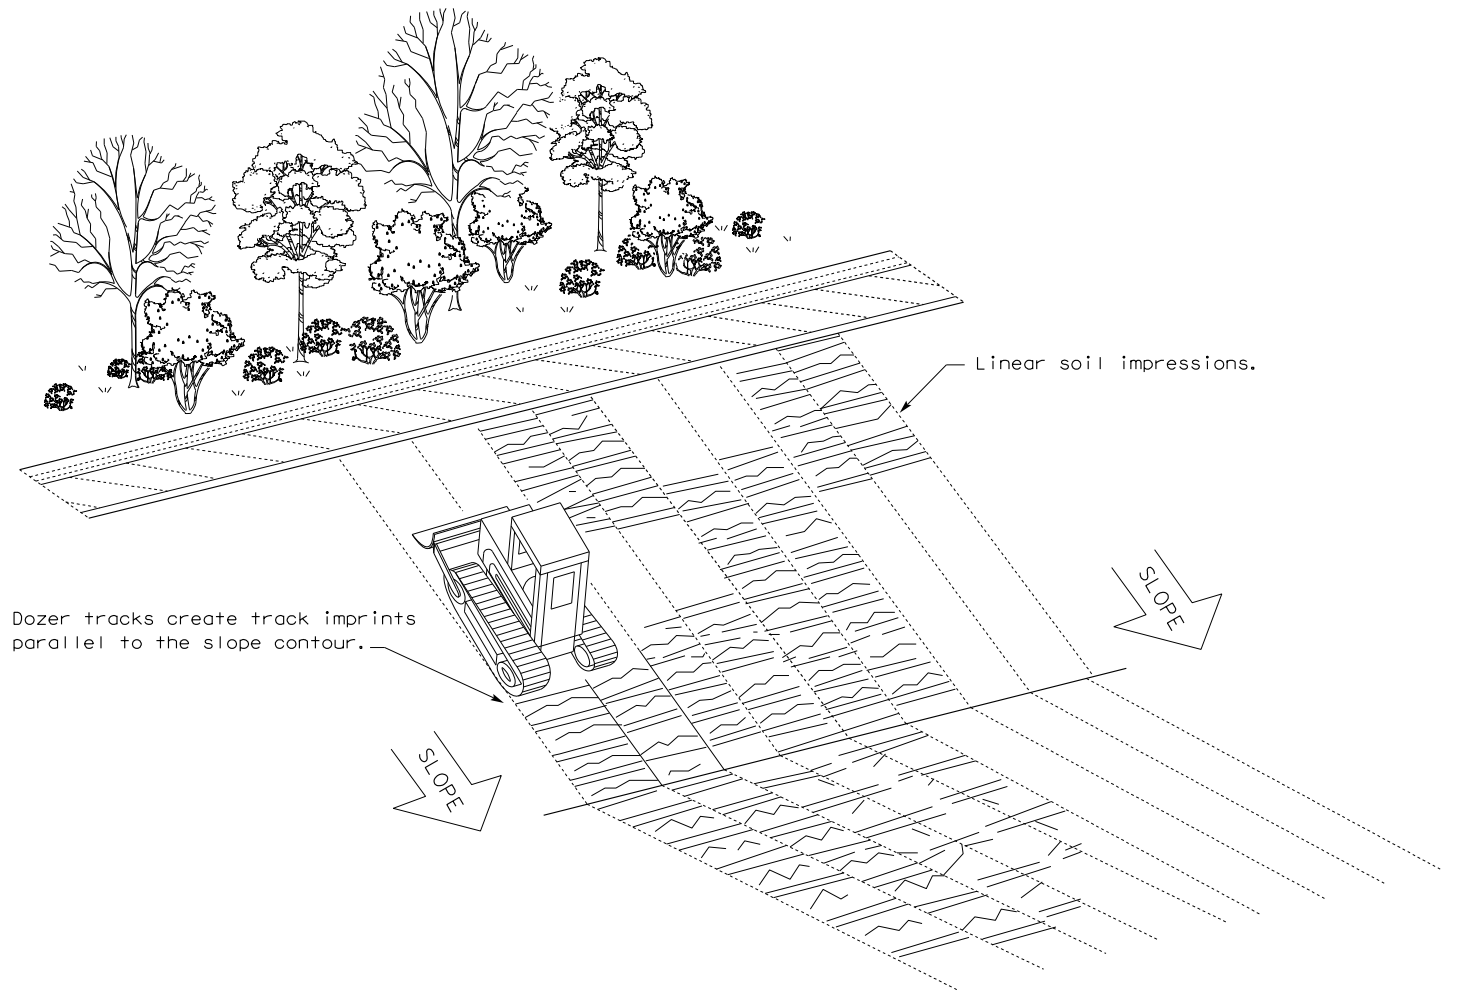


**TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES FENCE & VERTICAL TRACKING EC(1)-16**

FILE: ec116	DN: TxDOT	CK: KM	DW: VP	DN/CK: LS
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY
REVISIONS	1652	01	015	FM 419
	DIST	COUNTY		SHEET NO.
	ABL	FISHER		057


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

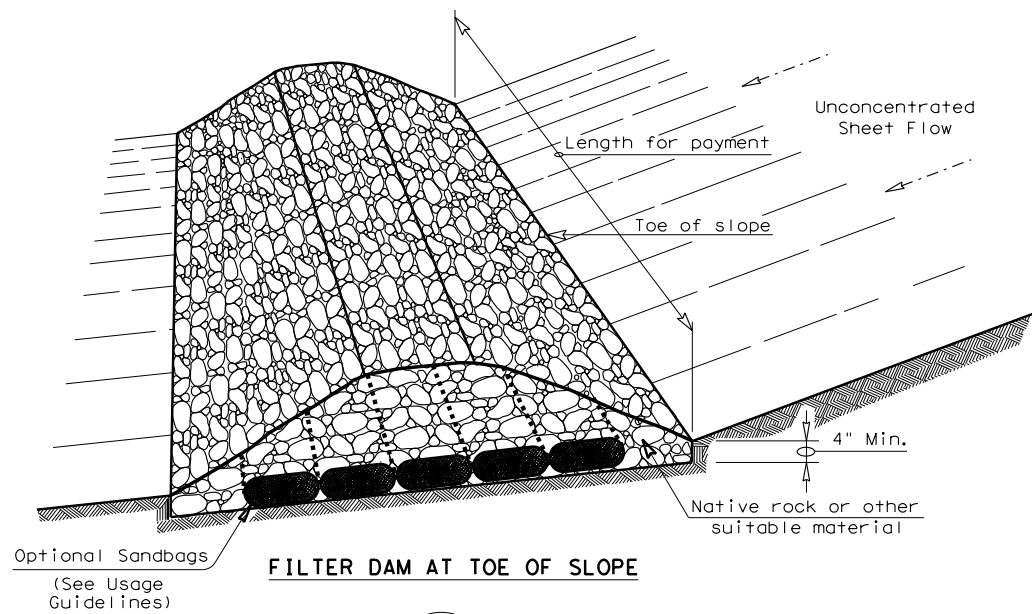


**FILTER DAM AT TOE OF SLOPE**


— (RFD1) —

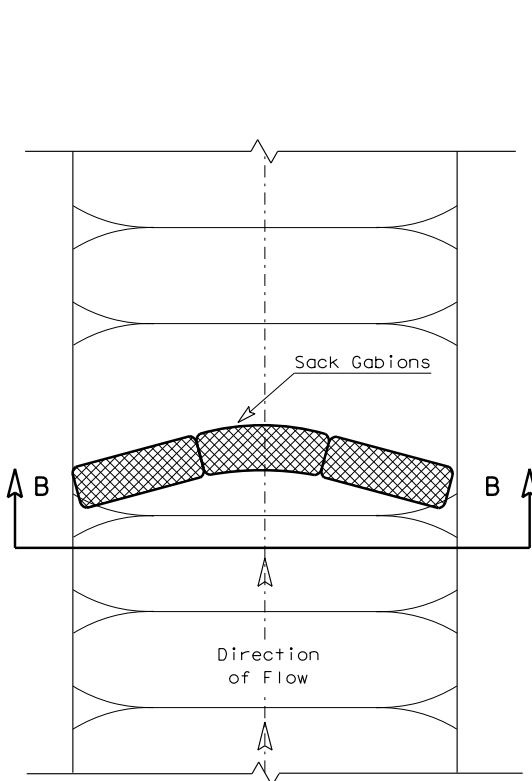


**PLAN VIEW**

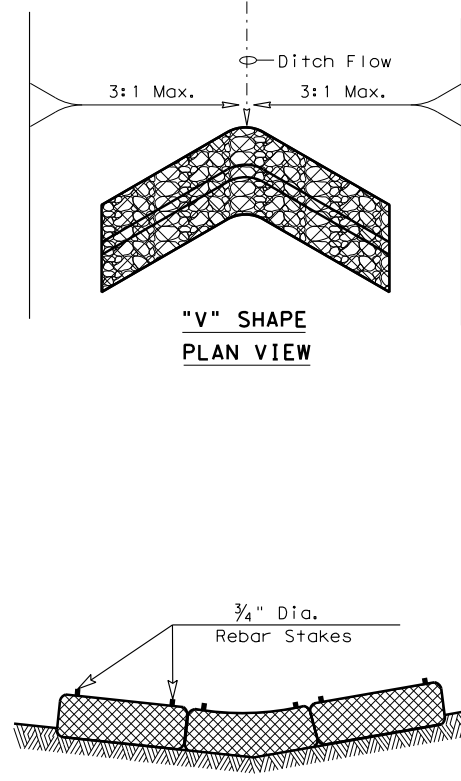

**"V" SHAPE PLAN VIEW**

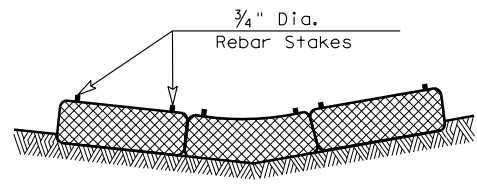


**SECTION B-B**

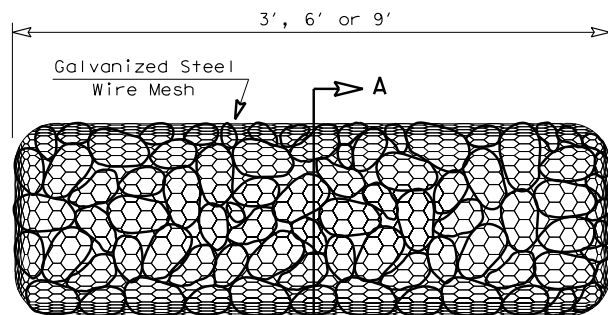


**TYPE 4 (SACK GABIONS)**

— (RFD4) —

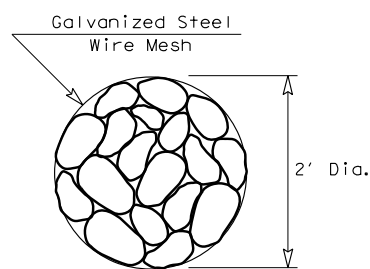


**SECTION A-A**

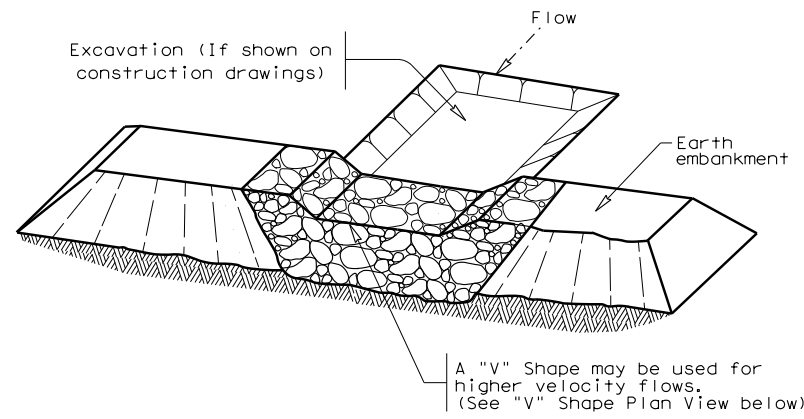


**FILTER DAM AT SEDIMENT TRAP**

— (RFD1) — OR — (RFD2) —

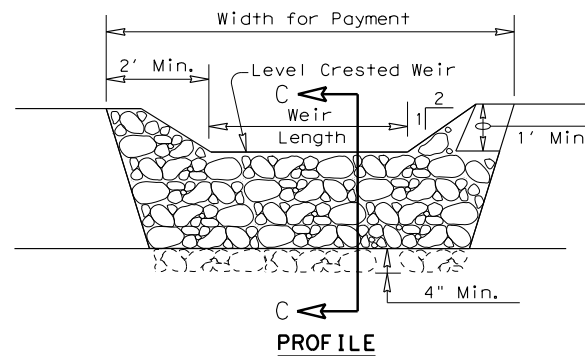

**PROFILE**

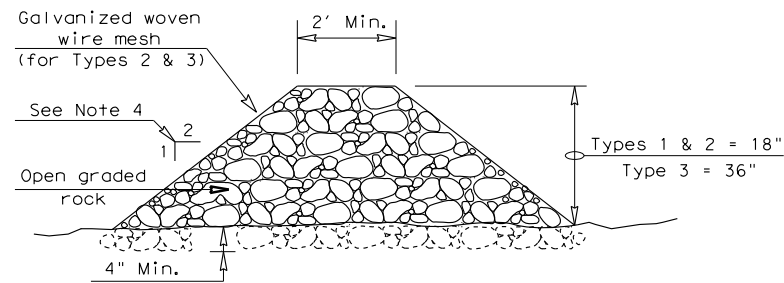

**SECTION C-C**

**ROCK FILTER DAM USAGE GUIDELINES**

Rock Filter Dams should be constructed downstream from disturbed areas to intercept sediment from overland runoff and/or concentrated flow. The dams should be sized to filter a maximum flow through rate of 60 GPM/FT<sup>2</sup> of cross sectional area. A 2 year storm frequency may be used to calculate the flow rate.


**Type 1 (18" high with no wire mesh) (3" to 6" aggregate):** Type 1 may be used at the toe of slopes, around inlets, in small ditches, and at dike or swale outlets. This type of dam is recommended to control erosion from a drainage area of 5 acres or less. Type 1 may not be used in concentrated high velocity flows (approximately 8 Ft/Sec or more) in which aggregate wash out may occur. Sandbags may be used at the embedded foundation (4" deep min.) for better filtering efficiency of low flows if called for on the plans or directed by the Engineer.

**Type 2 (18" high with wire mesh) (3" to 6" aggregate):** Type 2 may be used in ditches and at dike or swale outlets.

**Type 3 (36" high with wire mesh) (4" to 8" aggregate):** Type 3 may be used in stream flow and should be secured to the stream bed.

**Type 4 (Sack gabions) (3" to 6" aggregate):** Type 4 May be used in ditches and smaller channels to form an erosion control dam.

**Type 5:** Provide rock filter dams as shown on plans.

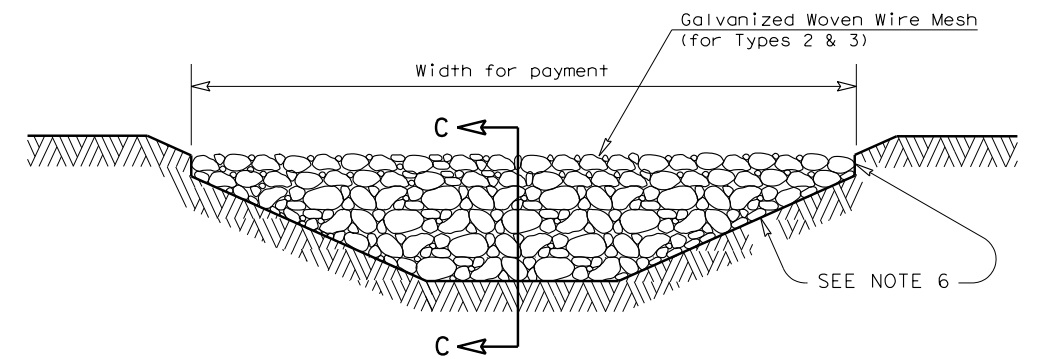

**FILTER DAM AT CHANNEL SECTIONS**

— (RFD1) — OR — (RFD2) — OR — (RFD3) —

**GENERAL NOTES**

1. If shown on the plans or directed by the Engineer, filter dams should be placed near the toe of slopes where erosion is anticipated, upstream and/or downstream at drainage structures, and in roadway ditches and channels to collect sediment.
2. Materials (aggregate, wire mesh, sandbags, etc.) shall be as indicated by the specification for "Rock Filter Dams for Erosion and Sedimentation Control".
3. The rock filter dam dimensions shall be as indicated on the SW3P plans.
4. Side slopes should be 2:1 or flatter. Dams within the safety zone shall have sideslopes of 6:1 or flatter.
5. Maintain a minimum of 1' between top of rock filter dam weir and top of embankment for filter dams at sediment traps.
6. Filter dams should be embedded a minimum of 4" into existing ground.
7. The sediment trap for ponding of sediment laden runoff shall be of the dimensions shown on the plans.
8. Rock filter dam types 2 & 3 shall be secured with 20 gauge galvanized woven wire mesh with 1" diameter hexagonal openings. The aggregate shall be placed on the mesh to the height & slopes specified. The mesh shall be folded at the upstream side over the aggregate and tightly secured to itself on the downstream side using wire ties or hog rings. For in stream use, the mesh should be secured or staked to the stream bed prior to aggregate placement.
9. Sack Gabions should be staked down with 3/4" dia. rebar stakes, and have a double-twisted hexagonal weave with a nominal mesh opening of 2 1/2" x 3 1/4".
10. Flow outlet should be onto a stabilized area (vegetation, rock, etc.).
11. The guidelines shown hereon are suggestions only and may be modified by the Engineer.


**PLAN SHEET LEGEND**

- Type 1 Rock Filter Dam — (RFD1) —
- Type 2 Rock Filter Dam — (RFD2) —
- Type 3 Rock Filter Dam — (RFD3) —
- Type 4 Rock Filter Dam — (RFD4) —


		<b>Design Division Standard</b>	
<b>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES</b> <b>ROCK FILTER DAMS</b> <b>EC (2) - 16</b>			
FILE: ec216	DN: TxDOT	CK: KM	DW: VP
© TxDOT: JULY 2016	CONT: 1652	SECT: 01	JOB: 015
REVISIONS	DIST: COUNTY		HIGHWAY: FM 419
	ABL: FISHER		SHEET NO.: 058

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: FILE:

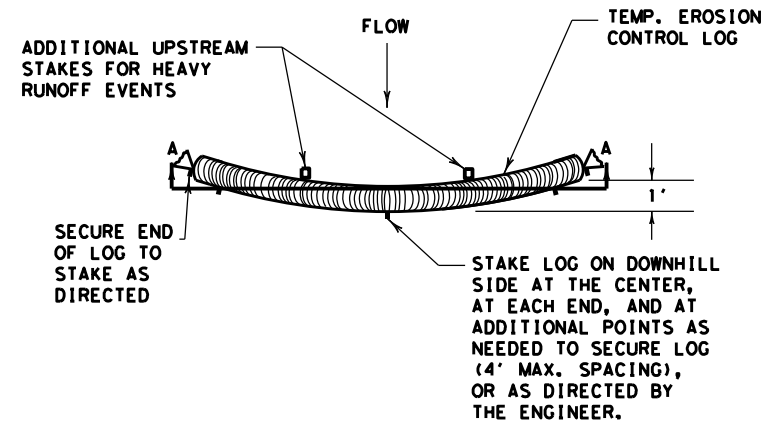


PLAN VIEW

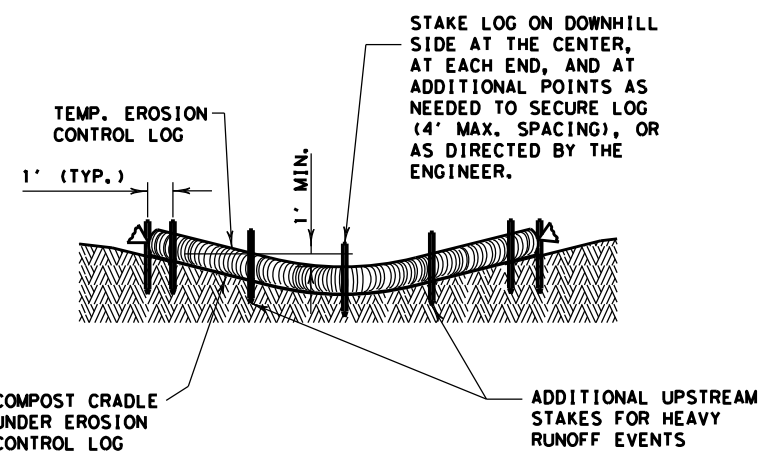


SECTION A-A

EROSION CONTROL LOG DAM

CL-D

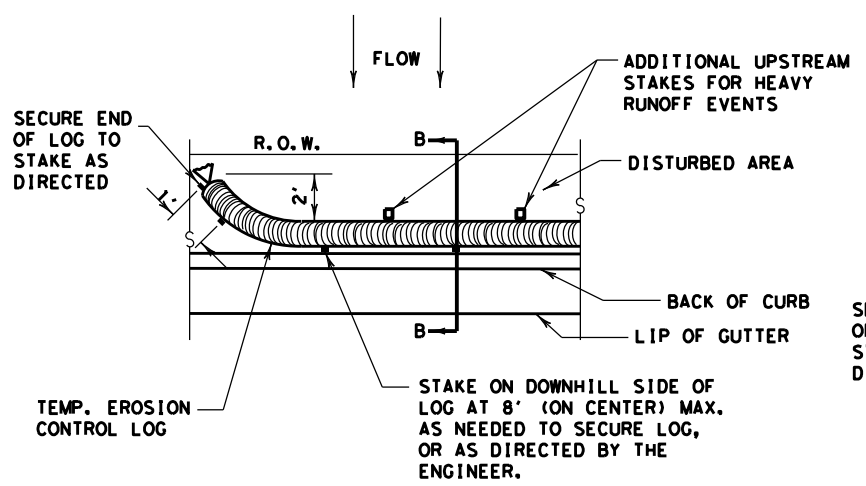


PLAN VIEW

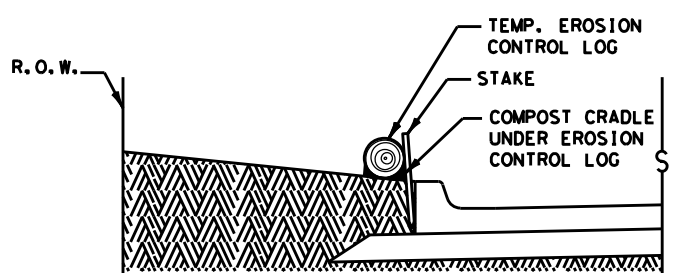


SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB

CL-BOC

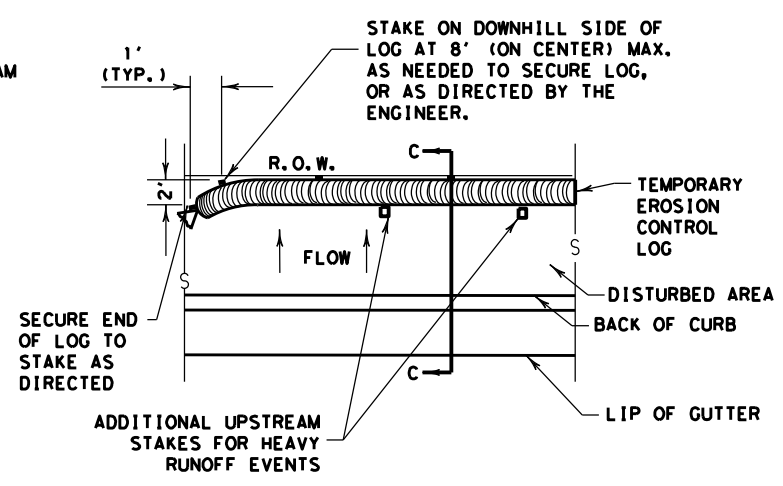


PLAN VIEW

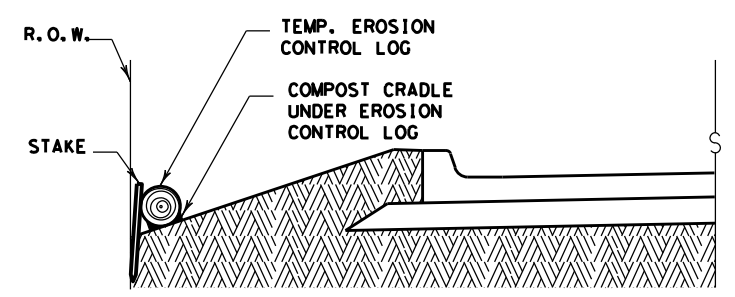


SECTION C-C

EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

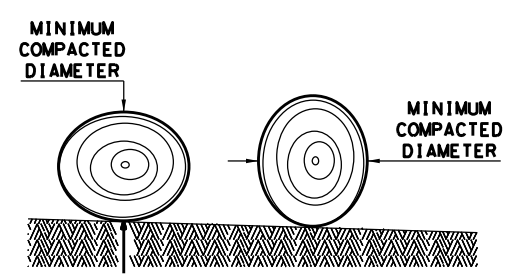

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS



REBAR STAKE DETAIL

**SEDIMENT BASIN & TRAP USAGE GUIDELINES**

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

**Log Traps:** The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

**GENERAL NOTES:**


1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3

		Design Division Standard	
<b>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES</b> <b>EROSION CONTROL LOG</b> <b>EC (9) - 16</b>			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	1652	01	015
	DIST	COUNTY	SHEET NO.
	ABL	FISHER	059




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

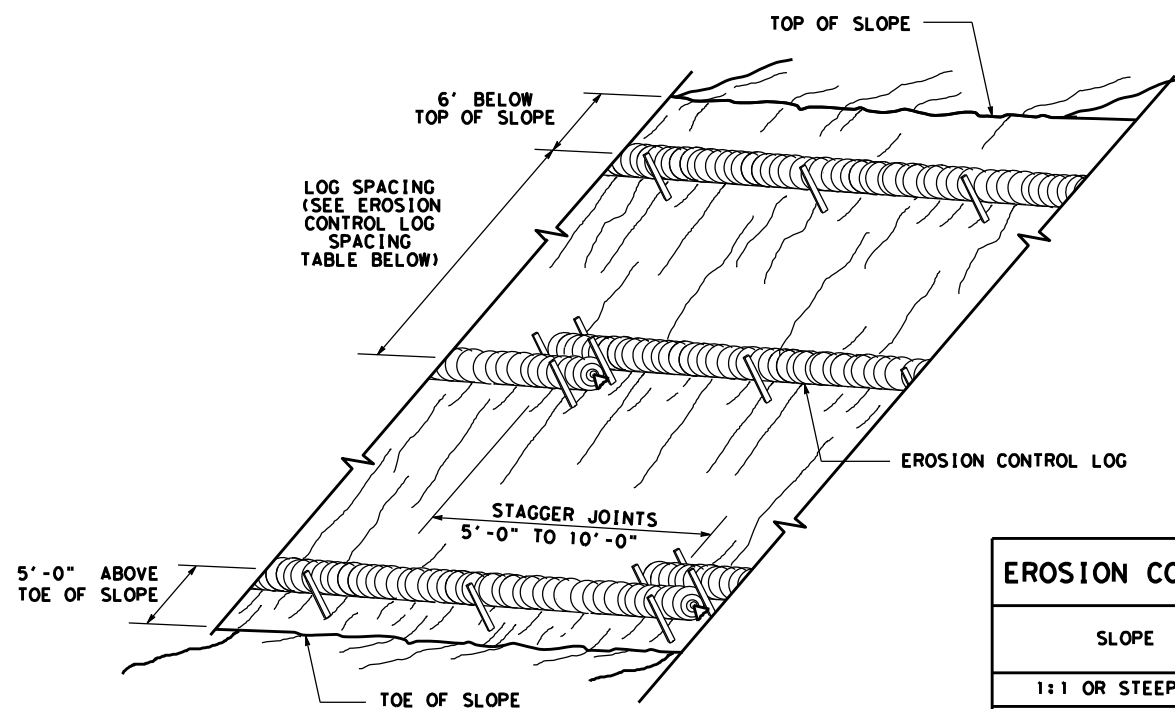


**EROSION CONTROL LOGS ON SLOPES  
STAKE AND TRENCHING ANCHORING**

CL-SST

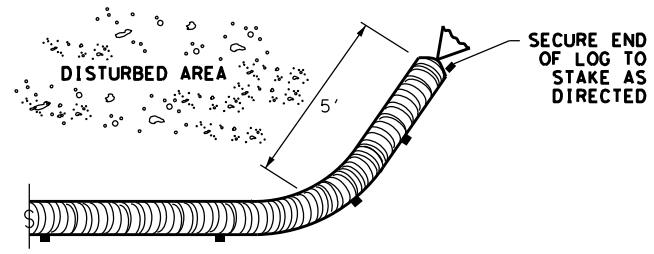

**END SECTION RAP DETAIL**

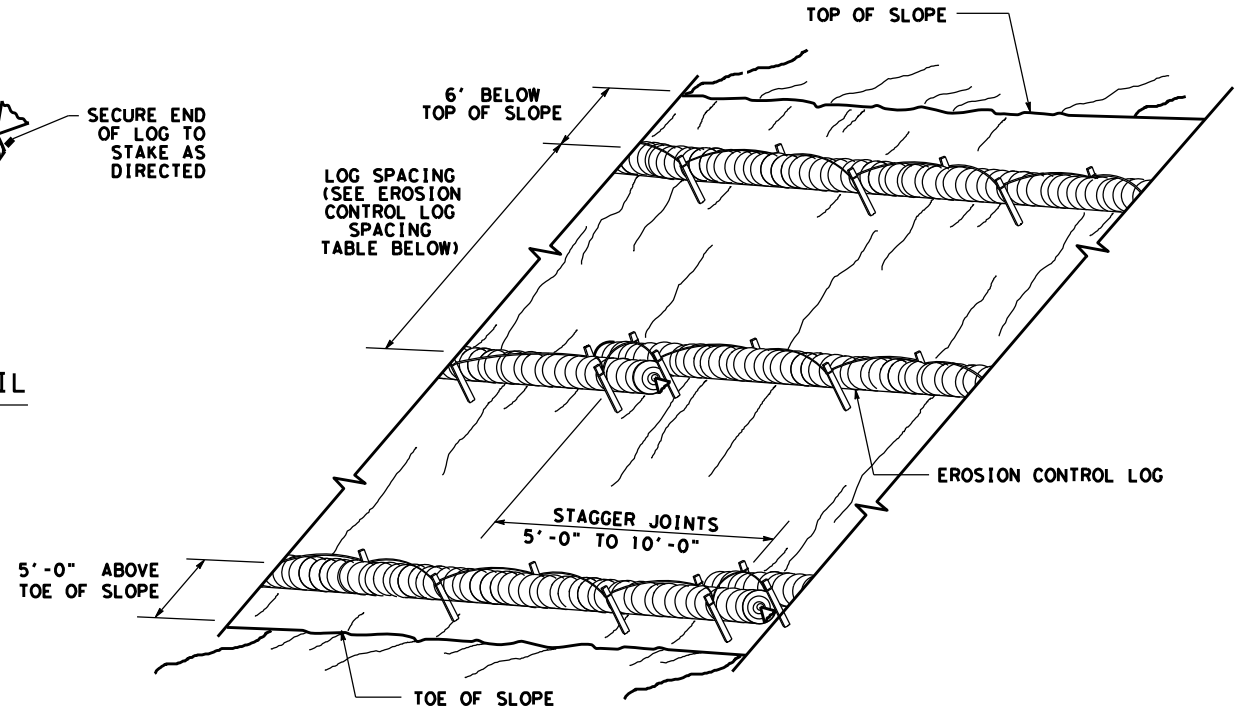


**EROSION CONTROL LOGS ON SLOPES  
STAKE AND LASHING ANCHORING**

CL-SSL



SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

\* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:  
SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;  
HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

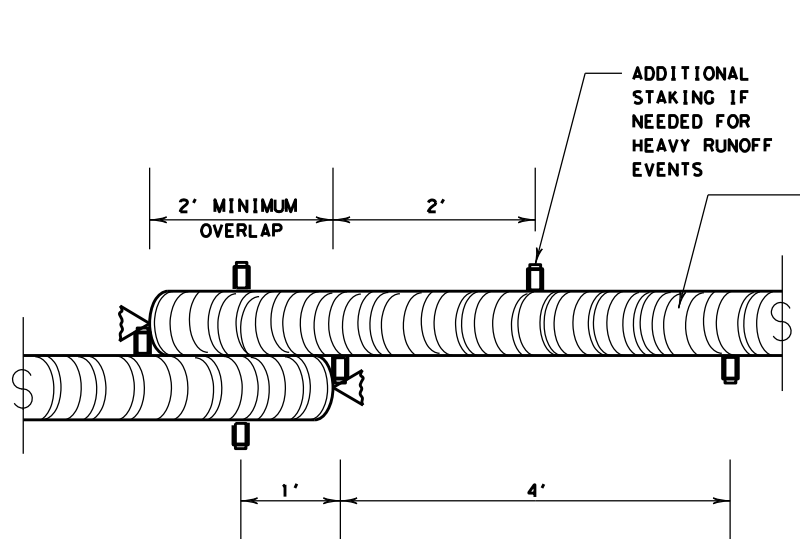


**STAKE AND TRENCHING ANCHORING DETAIL**

CL-SST

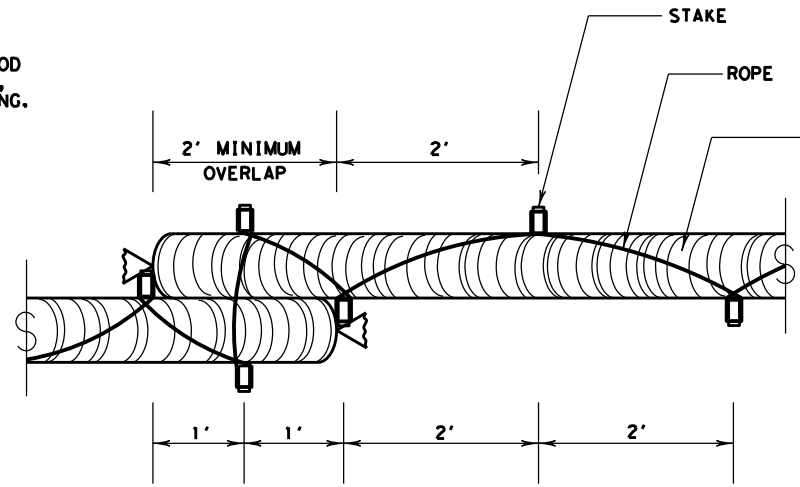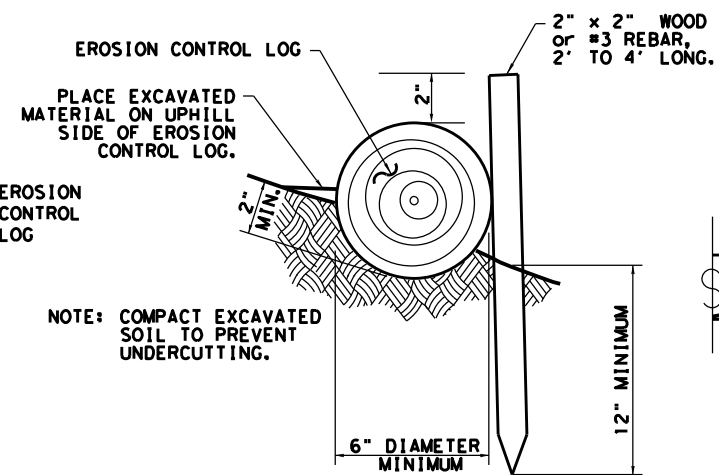


**STAKE AND LASHING ANCHORING DETAIL**

CL-SSL

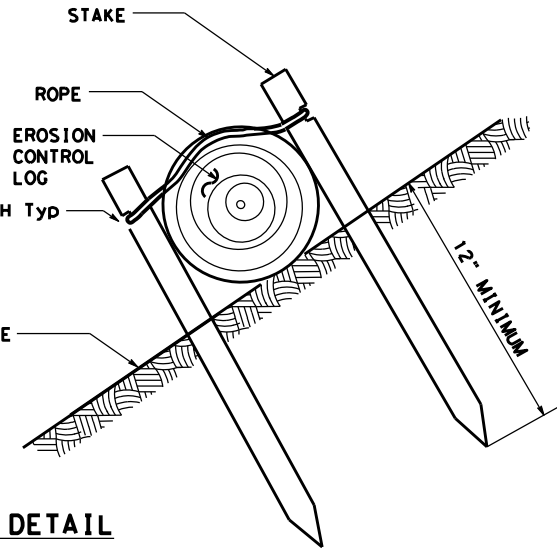

TRENCH DEPTH TABLE	
LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"




**STAKE NOTCH DETAIL**

SHEET 2 OF 3

		Design Division Standard	
<b>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16</b>			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	1652 01	015	FM 419
	DIST	COUNTY	SHEET NO.
	ABL	FISHER	060


DATE:  
FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

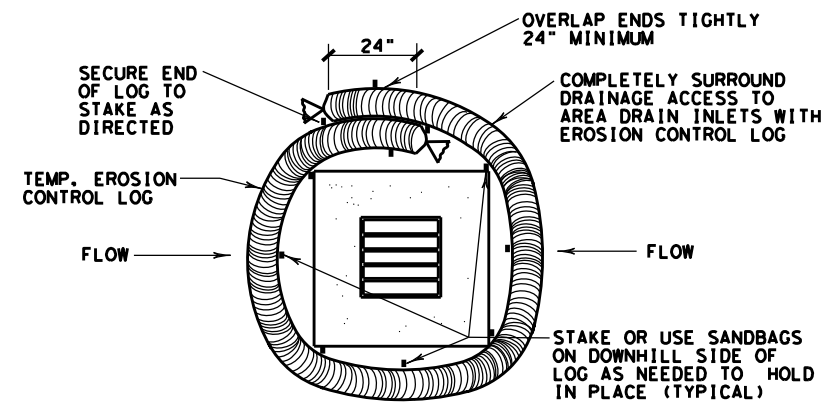


**EROSION CONTROL LOG AT DROP INLET**

CL-DI

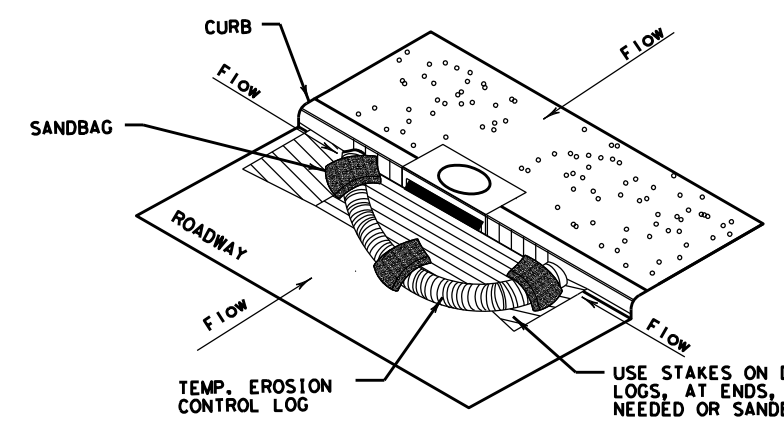

**EROSION CONTROL LOG AT CURB INLET**


CL-CI

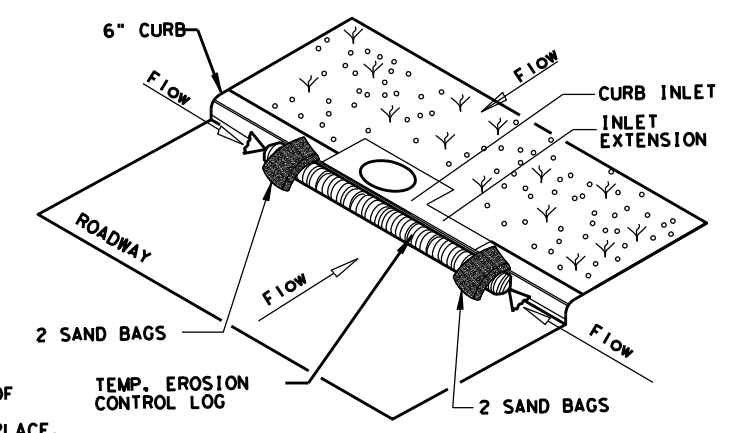

**EROSION CONTROL LOG AT CURB INLET**


CL-CI

NOTE:  
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

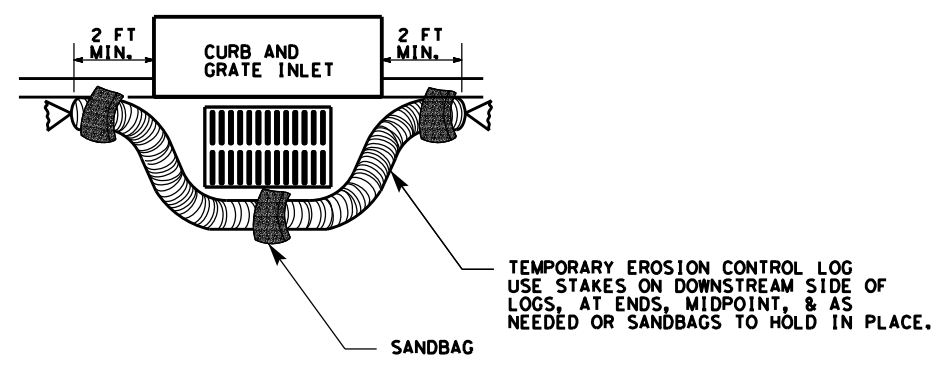

**EROSION CONTROL LOG AT CURB & GRADE INLET**

CL-GI

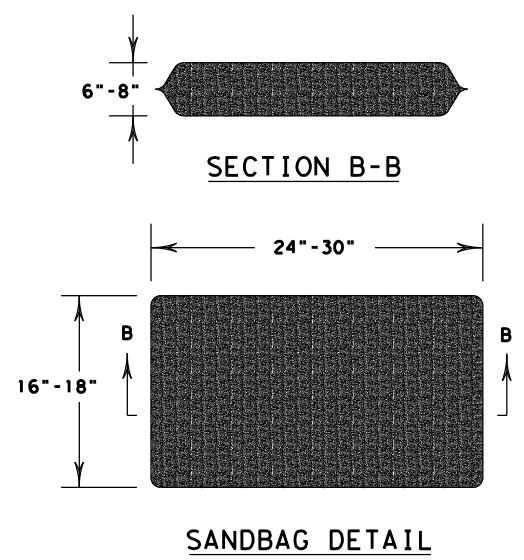

		Design Division Standard	
<b>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES</b> <b>EROSION CONTROL LOG</b> <b>EC (9) - 16</b>			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	1652	01	015
	DIST	COUNTY	SHEET NO.
	ABL	FISHER	061

DATE: FILE: