PROJECT.

INDEX OF SHEETS

THE STANDARD SHEET SPECIFICALLY IDENTIFIED* ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY DIRECT SUPERVISION AS BEING APPLICABLE TO THIS

*THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN ISSUED BY ME AND ARE APPLICABLE TO THIS PROJECT.

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	PROJECT LOCATION SHEET
3-6	GENERAL NOTES
7	ESTIMATE AND QUANTITY
8	QUANTITY SUMMARY SHEET
9-10	LAYOUT PLAN
11-14	WALL DETAILS
15-16	PLANTING PLAN
17	PLANTING SPECIFICATIONS
18-20	PLANTING AND ESTABLISHMENT
21-22	IRRIGATION PLAN
23-25	IRRIGATION DETAILS AND MATERIALS
26-27	SW3P
28	EPIC
29-40	*BC (1)-21 THRU BC(12)-21
41	*TCP (1-1)-18
42	*TCP (2-1)-18
43-52	*TA-BMP
53	*EC(1)-16
54-56	*EC(9)-16
57	SW3P SIGN

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT

STATE AID PROJECT: C 184-1-68


CORYELL COUNTY

SH 36

CSJ 0184-01-068 NET LENGTH OF PROJECT: 1056.00 FT = 0.200 MI

LIMITS: FROM: AT THE INTERSECTION OF BUS 36 & SH 36

FOR THE CONSTRUCTION OF LANDSCAPE DEVELOPMENT CONSISTING OF INSTALLATION OF LANDSCAPE IMPROVEMENTS

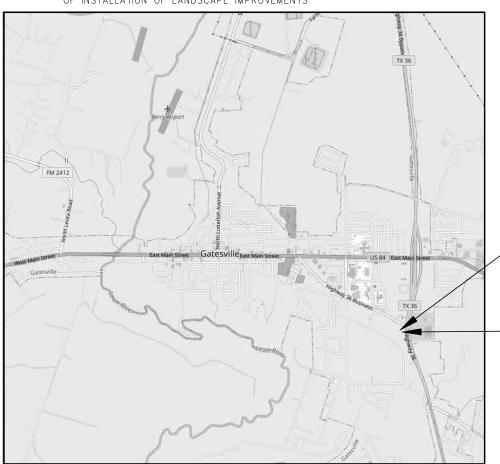

BEGIN PROJECT

CSJ: 0184-01-068 STA 170+88.67 REF. MRKR 442+1.107

END PROJECT

CSJ: 0184-01-068

Specifications Adopted By The Texas Department of Transportation NOVEMBER 1, 2014 and Specification Items Listed and Dated as Follows, WILL Govern on This Project: Special Labor Provisions for State Projects (000-008).

EXCEPTIONS: NONE EQUATIONS: NONE RR CROSSINGS: NONE SCALE: 1" = 5280.00"

1" = 5,280.0'

©)2023 by Texas Department of Transportation; all rights reserved.

DESIGN	FED.RD. DIV.NO.	STAT	E AID PROJECT NO.	HIGHWAY NO.
GRAPHICS	6		C 184-168	SH 36
	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	WACO	CORYELL	
CHECK	CONTROL	SECTION	JOB	1 1
	0184	01	068	

DESIGN SPEED = 30 MPH

YEAR	ADT
2021	12,257
2041	17,160

Texas Department of Transportation

1/12/2023 Recommended for Michael Yates

1/12/2023 Recommended for Letting Outr Stabel PE.


Director of Transportation Planning & Development


1/12/2023 Approved for

STA 181+44.67 REF. MRKR. 442 +1.107

Stanley Swiatck

District Engineer

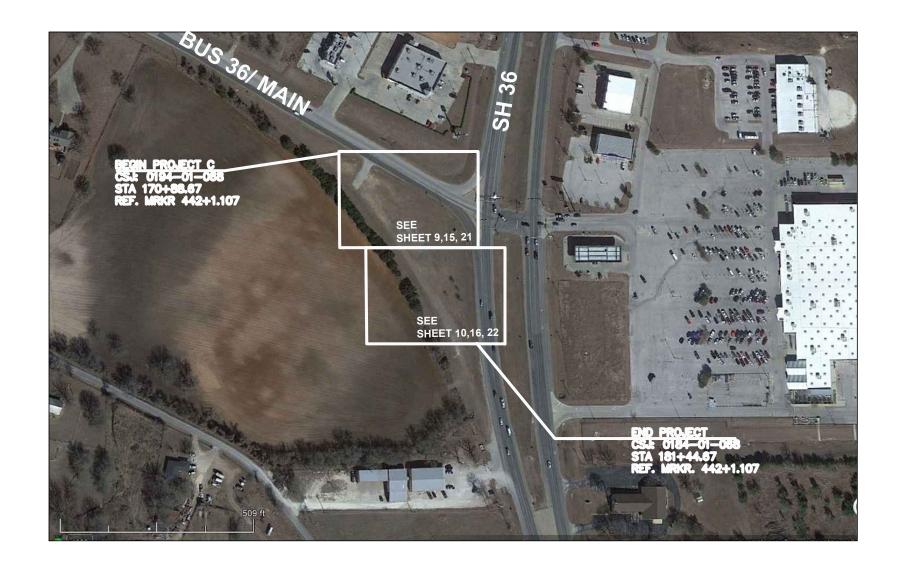







PROJECT LOCATION SHEET



CONT	SECT	JOB	HIGHWAY		
0184	01	068	SH 36		
DIST		COUNTY		SHEET NO.	
WACO		CORYELL		2	

Highway: SH 36 CSJ: 0184-01-068

	Table 2: Basis of Estimate for Permanent Construction										
Item	Description	Thickness	Rate	Quantity							
164	Fertilizer		See Specifications	4 CY							
164	Cell Fbr Mlch Seed (Perm) (Urban) (Clay)		See Specifications	2,884 SY							
164	Vegetative Watering (Fall)*		See Specifications	146 MG							

^{*}For contractor's information only

COUNTY: CORYELL SHEET 3

HIGHWAY: SH 36 CSJ: 0184-01-068

GENERAL

The construction, operation and maintenance of the proposed project will be consistent with the state implementation plan as prepared by the Texas Commission on Environmental Quality.

The disturbed area for this project, as shown on the plans is 1.5 acres. However, the Total Disturbed Area (TDA) will establish the required authorization for storm water discharges. The TDA of this project will be determined by the sum of the disturbed area in all project locations in the contract, and all disturbed area on all Project-Specific Locations (PSL) located in the project limits and/or within 1 mile of the project limits. The department will obtain an authorization to discharge storm water from the Texas Commission on Environmental Quality (TCEQ) for the construction site as shown on the plans, according to the TDA of the project. The contractor will obtain any required authorization from the TCEQ for the discharge of storm water from any PSL for construction support activities on or off of the project row according to the TDA of the project. When the TDA for the project exceeds 1 acre, provide a copy of the appropriate application of permit (NOI, or Construction Site Notice) to the engineer, for any PSL located in the project limits or within 1 mile of the project limits. Follow the directives and adhere to all requirements set forth in the TCEQ, Texas Pollution Discharge Elimination System, Construction General Permit (TPDES, CGP).

This project required <u>permitting</u> with environmental resources agencies, as outlined in the plan set Environmental Permits, Issues, and Commitments (EPIC) Sheet. There is a high probability that an environmentally sensitive area could be encountered on the contractor designated Project-Specific Locations (PSL) for this project (haul roads, equipment staging areas, borrow pits, disposal sites, field offices, storage areas, parking areas, etc.). Item 7.6 "Project-Specific Locations", provides a listing of regulatory agencies that may need to be contacted regarding this project.

Install traffic marking signs prior to sealcoat application and remove within three days after placement of traffic markings.

Leave all right of way areas undisturbed until actual construction is to be performed in said areas.

Contractor questions on this project are to be addressed to the following individual(s):

Bill Compton - Wacoprebid@txdot.gov, 254-867-2770, 100 S. Loop Dr., Waco, TX Carmen Chau - Wacoprebid@txdot.gov, 254-867-2794, 100 S. Loop Dr., Waco, TX

Or Via phone or in person to the following individual(s): Area Engineer's: Michael Yates, P.E., 254-865-7115 Assistant Area Engineer's: Mohab Samuel, P.E., 254-865-7115

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address: https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/

General Notes Sheet A General Notes Sheet B

^{**}Use Summer rate for calculation, adjust for actual field conditions/temperatures as necessary.
See Vegetation Establishment Plan Sheet for estimated daily rates.

^{***}Portland Concrete Cement

HIGHWAY: SH 36 CSJ: 0184-01-068

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

For Q&A's on Proposals navigate to https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors. Use the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

Paper copies of cross-sections may be produced by using the provided .pdf file located on the above FTP Website at the bidders' expense and at copying companies. This data is for non-construction purposes only and it is the responsibility of the prospective bidder to validate the enclosed data with appropriate plans, specifications and estimate for the project(s).

ITEM 5: CONTROL OF THE WORK

Underground utilities owned by the Texas Department of Transportation may be present within the Right-Of-Way on this project. For signal, illumination, surveillance, and communications & control maintained by TxDOT, call the TxDOT Traffic Signal Office (214-320-6682) for locates a minimum of 48 hours in advance of excavation. For irrigation systems, call TxDOT Landscape Office (214-320-6205) for locates a minimum of 48 hours in advance of excavation. If city or town owned irrigation facilities are present, call the appropriate department of the local city or town a minimum of 48 hours in advance of excavation. The Contractor is liable for all damages when utilities are damaged due to Contractor's negligence including, but not limited to, repair or replacement at the Contractor's expense.

For the project to be deemed complete, permanently stabilize all unpaved disturbed areas of the project with a vegetative cover at a minimum of 70% density for the control of erosion.

Place construction stakes/station markings at intervals of no more than 100 feet or as directed by the Engineer. Place stakes and markings so as not to interfere with normal construction operations.

ITEM 6: CONTROL OF MATERIALS

This proposed Contract will not include federal funds. Buy Texas stipulations apply in accordance with 6.1.2 "Buy Texas".

References to manufacturer's trade name or catalog numbers are for the purpose of identification only and the Contractor will be permitted to furnish like materials of other manufacturers provided they are of equal quality and comply with specifications for this project.

COUNTY: CORYELL SHEET 4

HIGHWAY: SH 36 CSJ: 0184-01-068

ITEM 7: LEGAL RELATIONS AND RESPONSIBILITIES

No significant traffic generator events identified.

If utilizing private property for waste disposal sites, field office sites, equipment storage sites or for any other purpose involved with this project, provide to the Engineer written proof of the property owner's approval of the use of this property. This proof may be in the form of a letter or agreement signed by the property owner or other documents acceptable to the Engineer. Provide such proof prior to occupying the site.

Personal vehicles of the Contractor's employees will not be parked within the right of way at any time including any section closed to public traffic, unless the vehicle is being utilized for construction procedures. However, the Contractor's employees may park on the right of way at the sites where the Contractor has his office, equipment and materials storage yard.

Once this drawing and supporting information is reviewed and approved by TxDOT, all construction workers should be made aware of the limits designated on the drawings by the Contractor's supervision. Work in all waters of the US will be limited to the minimum necessary required to construct the bridge, culvert or roadway fills. Work will also include all activities needed for bridge and culvert demolitions. Working or disturbing soil in the stream channel outside the limits of the work plan will not be allowed. Orange fencing will be provided and maintained to establish the TxDOT approved boundaries in which work may be conducted between the Ordinary High-Water Marks. Orange fencing will not be paid for but will be considered subsidiary to Item 502, "Barricades, Signs and Traffic Handling".

Repair or replace any structures and utilities that might have been damaged by negligence or a failure to have utility locates performed.

Perform all electrical work in accordance with the National Electrical Code and Texas Department of Transportation Specifications.

Consult with appropriate electric company representatives according to their respective area to coordinate electrical services installations.

ITEM 8: PROSECUTION AND PROGRESS

This Project will be a Five-Day Workweek in accordance with Article 8.3.1.1.

Meet weekly with the engineer to notify him or her of planned work for the upcoming week.

Provide the engineer with a daily work schedule of planned work.

HIGHWAY: SH 36 CSJ: 0184-01-068

ITEM 160: TOPSOIL

Sequence construction operations to salvage topsoil from one location and spread on areas ready to receive topsoil. Keep stockpiling of topsoil to a minimum.

Use fertile clay or loam from the project site not more than six inches below natural grade as topsoil.

Avoid topsoil areas that have invasive plant species. Contain / separate topsoil from areas with identified invasive species into separate windrows / piles. Mark topsoil from invasive species areas accordingly and track and return materials to only their original areas or dispose of such materials accordingly. Invasive species will include Giant Cane,

ITEM 192: : LANDSCAPE PLANTING

Provide forty-eight (48) hours notification to the Engineer of the time that plant maintenance will be conducted so that an inspector may be present during these activities. The Engineer may withhold monthly payment for landscape establishment if he is not adequately notified of the contactor's maintenance activities.

No planting shall occur between June 1st and September 15th without written approval from the Engineer.

Perform soil percolation test at least 24 hours prior to planting trees in plant pits. Excavate plant pit and fill entirely with water. Inspect planting pit within 24 hours to verify water has percolated into surrounding soil. In the event the water is present after 24 hours, contact Engineer before continuing tree planting in pits.

Prior to installing any plant material, ensure the irrigation system (if included in project) is pressurized up to the valves.

Begin the 90-day maintenance period only after all live plant material and functional irrigation systems have been installed as shown on plans.

ITEM 500: MOBILIZATION

Material On Hand (MOH) will not be used in calculating partial payments for Mobilization.

ITEM 502: BARRICADES, SIGNS, AND TRAFFIC HANDLING

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

COUNTY: CORYELL SHEET 5

HIGHWAY: SH 36 CSJ: 0184-01-068

Access will be provided to all business and residences at all times. Where turning radii are limited during phased construction at intersections, provide all weather surfaces such as RAP or base in turning movements to accommodate and to protect the traffic from edge drop-offs. Materials, labor, maintenance and removal for these temporary accesses and radii will not be paid for directly but will be considered subsidiary to the various bid items.

Provide written proposed lane closure information by 1:00 pm on the business day prior to the proposed closures. Do not close lanes when this requirement is not met.

Place barricades and signs in locations that do not obstruct the sight distance of drivers entering the highway from driveways or side streets.

Do not commence work on the road before sunrise. Do not operate or park any equipment/machinery closer than 30 feet from the traveled roadway after sunset unless authorized by the engineer.

When moving unlicensed equipment on or across any pavement or public highways, protect the pavement from all damage using an acceptable method.

All field office layouts must be approved by the Engineer prior to installation.

Provide an all in one color printer/scanner/copier that will print, scan and copy 11"x17" and 8.5"X11" sheets with software that is compatible with TxDOT equipment. This is subsidiary to the various bid items.

ITEM 506: TEMPROARY EROSION, SEDIMENTATION AND ENVIRONMENTAL CONTROLS

Provide SW3P Signs. Obtain from the Engineer a copy of the project's completed TPDES Storm Water Program Construction Site Notice and Contractor Site Notice. Laminate the sheets and bond with adhesive to 36" X 36" plywood sign blanks. Ensure the sheets remain dry. Apply Type C Blue reflective sheeting as the background and add the text "SW3P" in 5" white lettering, centered at the top. Attach the signs to approved temporary mounts and locate at each of the project limits just inside the right of way line at a readable height or as directed by the Engineer. If the sign cannot be placed outside the clear zone, it must adhere to the TMUTCD. SW3P signs, maintenance, and reposting (for replacement or as needed to ensure readability) will be subsidiary to Item 502.

Leave all right of way areas undisturbed until actual construction is to be performed in said areas.

No soil disturbing activities will begin on any section of TxDOT ROW without adequate sedimentation controls first being installed and functioning at adjacent drainage outfalls. Begin and continuously prosecute the repairs, additions and maintenance of erosion and sedimentation control devices within seven days after the Contractor receives each Form 2118, Field Inspection and Maintenance Report, from the Engineer. Failure of the Contractor to fulfill either of the above requirements places TxDOT in potential non-compliance with permit requirements and may result in withholding estimates or stopping work or both until all environmental permit requirements are fulfilled.

HIGHWAY: SH 36 CSJ: 0184-01-068 HIGHWAY: SH 36 CSJ: 0184-01-068

Concrete Washouts are required per the CGP. The Concrete Washout Area(s) structural controls must consist of temporary berms, temporary shallow pits, and/or temporary storage tanks to prevent contaminated runoff and must be lined as to prevent contamination of underlying soil. Ensure pits properly maintained including removal of concrete as not to allow over flow. The location(s) of washout area will be approved by the Engineer. When washout pits are no longer needed, they will be removed and area will be restored to original condition. This work, materials and labor will not be measured or paid for directly but will be subsidiary to Item 506, "Temporary Erosion, Sedimentation, and Environmental Controls."

ITEM 6185: TRUCK MOUNTED ATTENUATORS

The total number of truck mounted attenuators (TMA) required when utilizing the traffic control standards are shown in the tables below.

TCP 1 Series	Scenario	Required TMA
(1-1)-18		1

TCP 2 Series	Scenario	Required TMA
(2-1)-18	All	1

Shadow vehicles equipped for truck mounted attenuators (TMA) for stationary operations will be paid for by the day and must be available for use at any time as determined by the Engineer.

The Contractor will be responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMA needed for the project for those times per plan requirements. Additional TMAs used that are not specified in the plans in which the Contractor expects compensation will require prior approval from the Engineer.

THIS PAGE INTENTIONALLY LEFT BLANK

General Notes Sheet G General Notes Sheet H



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0184-01-068

DISTRICT WacoHIGHWAY SH 36

COUNTY Coryell

		1-068					
		PROJE	A0018	3272			
COUNTY Coryell					ell	TOTAL EST.	TOTAL FINAL
		HIG	HWAY	SH 3	36		TINAL
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	164-6031	CELL FBR MLCH SEED(TEMP)(COOL)	SY	146.000		146.000	
	168-6001	VEGETATIVE WATERING	MG	146.000		146.000	
	170-6003	IRRIGATION SYSTEM (TY II)	LS	1.000		1.000	
	192-6002	PLANT MATERIAL (1-GAL)	EA	57.000		57.000	
	192-6004	PLANT MATERIAL (5-GAL)	EA	23.000		23.000	
	192-6012	MULCH	CY	25.000		25.000	
	192-6024	PLANT MATERIAL (30 GAL) (TREE)	EA	1.000		1.000	
	192-6025	PLANT MATERIAL (45 GAL) (TREE)	EA	29.000		29.000	
	193-6007	IRRIGATION SYSTEM OPER AND MAINT	МО	9.000		9.000	
	423-6004	RETAINING WALL (CONC BLOCK)	SF	1,660.000		1,660.000	
	423-6006	RETAINING WALL (STONE)	SF	2,340.000		2,340.000	
	423-6015	RETAINING WALL (SPECIAL)	SF	1,660.000		1,660.000	
	432-6009	RIPRAP (CONC) (CL B) (4")	CY	6.400		6.400	
	432-6047	RIPRAP (MOW STRIP)(6 IN)	CY	4.000		4.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	МО	5.000		5.000	
	506-6020	CONSTRUCTION EXITS (INSTALL) (TY 1)	SY	1.000		1.000	
	506-6024	CONSTRUCTION EXITS (REMOVE)	SY	1.000		1.000	
	506-6038	TEMP SEDMT CONT FENCE (INSTALL)	LF	100.000		100.000	
	506-6039	TEMP SEDMT CONT FENCE (REMOVE)	LF	100.000		100.000	
	6185-6002	TMA (STATIONARY)	DAY	5.000		5.000	
	08	CONTRACTOR FORCE ACCOUNT SAFETY CONTINGENCY (NON-PARTICIPATING)	LS	1.000		1.000	
		CONTRACTOR FORCE ACCOUNT EROSION CONTROL MAINTENANCE (NON-PARTICIPATING)	LS	1.000		1.000	



DISTRICT	COUNTY	CCSJ	SHEET	
Waco	Coryell	0184-01-068	7	

	ë.	
	DW: C	
	œ.	
	DN:	
,		


SUMMARY QUANTITIES

BID CODE	164-6031	168-6001	170-6003	192-6002	192-6004	192-6012	192-6024	192-6025	193-6007	423-6004	423-6006	423-6015	432-6009	432-6047	506-6020	506-6024	506-6038	506-6039	6185-6002
DESCRIPTION	CELL FBR MLCH SEED(TEMP)(COOL)	VEGETATIVE WATERING	IRRIGATION SYSTEM (TY II)	PLANT MATERIAL (1-GAL)	PLANT MATERIAL (5-GAL)				IRRIGATION SYSTEM OPER AND MAINT			RETAINING WALL (SPECIAL)	RIPRAP (CONC) (CL B) (4")	RIPRAP (MOW STRIP)(6 IN)	CONSTRUCTION EXITS (INSTALL) (TY 1)	CONSTRUCTION EXITS (REMOVE)	TEMP SEDMT CONT FENCE (INSTALL)	TEMP SEDMT CONT FENCE (REMOVE)	TMA (STATIONARY)
ALTERNATE BID GROUP																			
UNIT	SY Square Yards	MG Thousand Gallons	LS Lump Sum	EA Each	EA Each	CY Cubic Yard	EA Each	EA Each	MO Monthly	SF Square Feet	SF Square Feet	SF Square Feet	CY Cubic Yard	CY Cubic Yard	SY Square Yards	SY Square Yards	LF Linear Feet	LF Linear Feet	DAY Day
PROJECT TOTALS	146.000	146.000	1.000	57.000	23.000	25.000	1.000	29.000	9.000	1,660.000	2,340.000	1,660.000	6.400	4.000	1.000	1.000	100.000	100.000	5.000


QUANTITY SUMMARY



CONT	SECT	JOB		HIGHWAY		
0184	01	068	SH 36			
DIST		COUNTY		SHEET NO.		
WACO		CORYFLI		8		

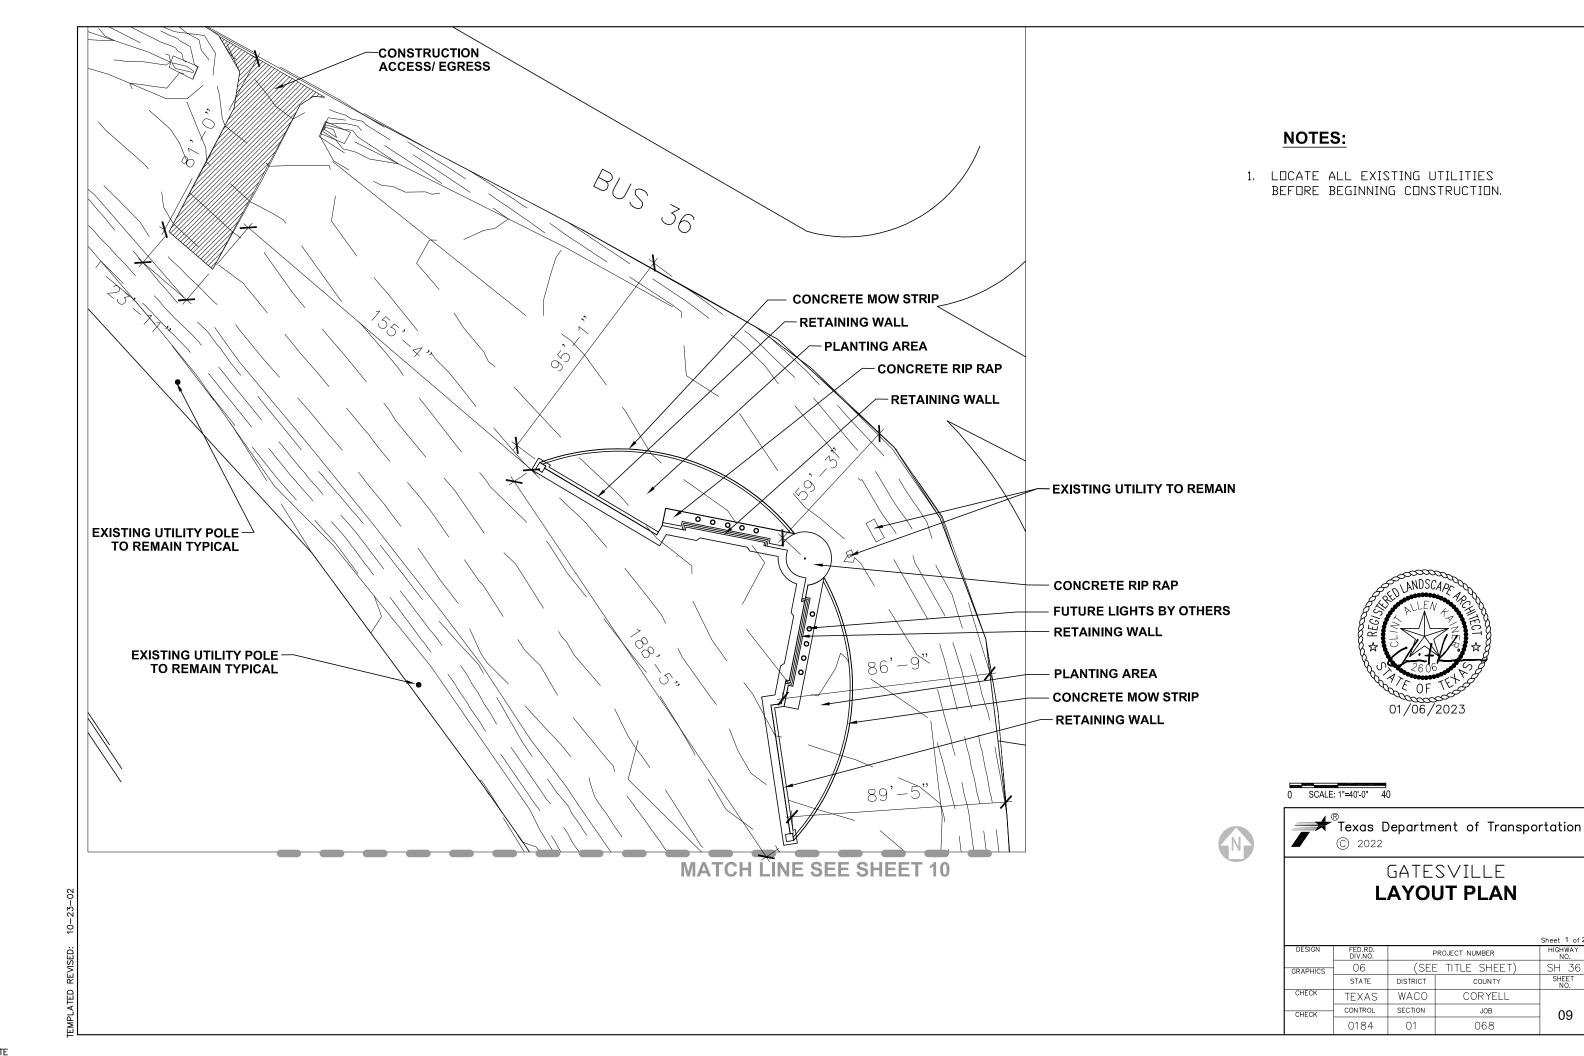

DΔTE

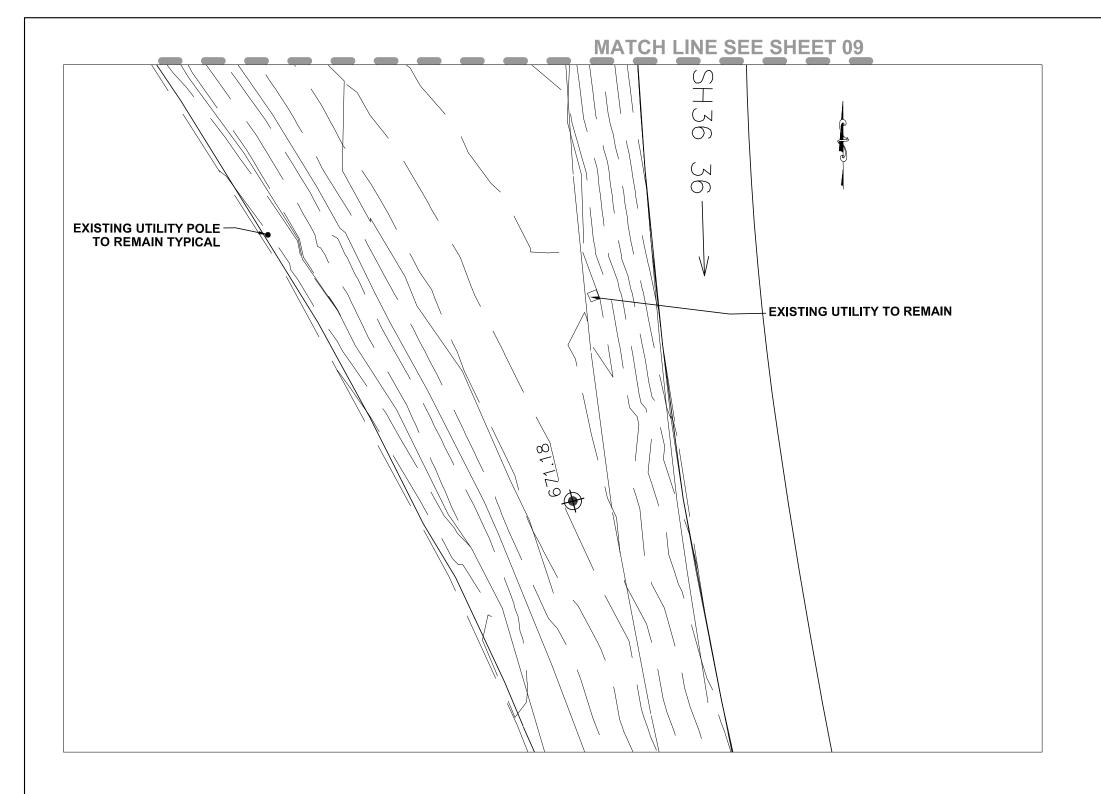


NOTES:

1. LOCATE ALL EXISTING UTILITIES BEFORE BEGINNING CONSTRUCTION.





0 SCALE: 1"=40'-0" 40



GATESVILLE **LAYOUT PLAN**

Sheet 2 or

SIGN	DIV.NO.	F	NO.	
APHICS	06	(SEE	SH 36	
	STATE	DISTRICT	COUNTY	SHEET NO.
HECK	TEXAS	WACO	CORYELL	
HECK	CONTROL	SECTION	JOB	10
	0184	01	068	

+ +

EST	IMATED SHEET Q	UAN	TITY	/
ITEM	DESCRIPTION	QUA.	UNIT	REMARKS
ITEM 420 - 6043	CL C CONC (FOOTING)	34	CY	
ITEM 423 - 6004	RETAINING WALL (CONC BLK)	763	SF	
ITEM 423 - 6006	RETAINING WALL (STONE)	763	SF	
ITEM 432 - 6001	RIPRAP (CONC) (4 IN)	3.2	CY	
ITEM 432 - 6047	RIPRAP (MOW STRIP) (6")	2	CY	

SEE SCHEDULE OF MATERIALS AND FINISHES FOR SIZES, COLORS, AND EXAMPLES OF BLOCK, STONE, AND CAST STONE PRODUCTS.







1-9-2023

RETAINING WALL

GATESVILLE **WALL DETAILS**

				Sheet 1 of 4		
DESIGN	FED.RD. DIV.NO.	F	PROJECT NUMBER	HIGHWAY NO.		
GRAPHICS	06	(SEE	(SEE TITLE SHEET)			
	STATE	DISTRICT	COUNTY	SHEET NO.		
CHECK	TEXAS	WACO	CORYELL			
CHECK	CONTROL	SECTION	JOB] 11		
	0184	01	068	11		

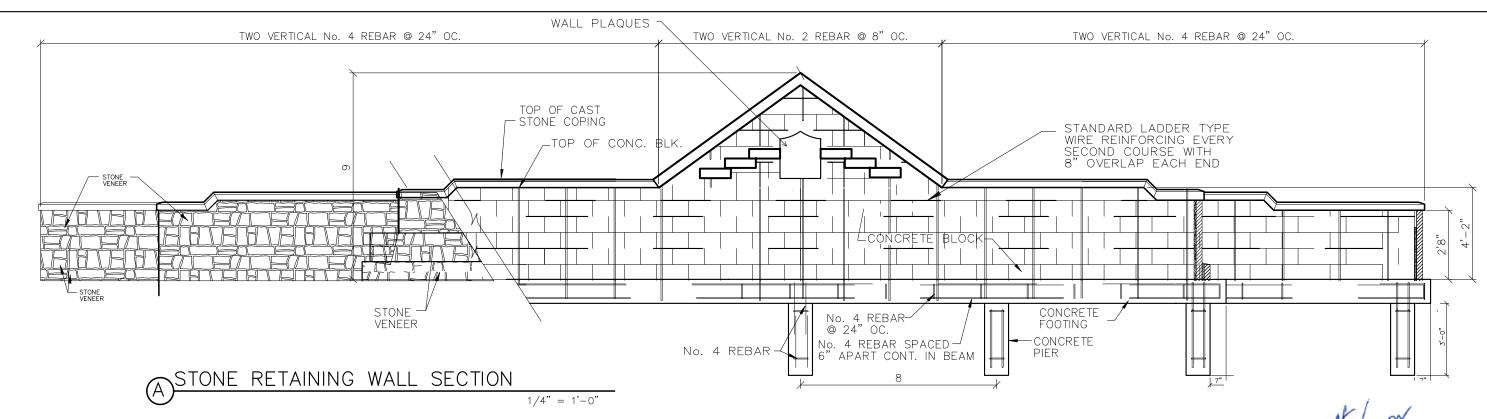

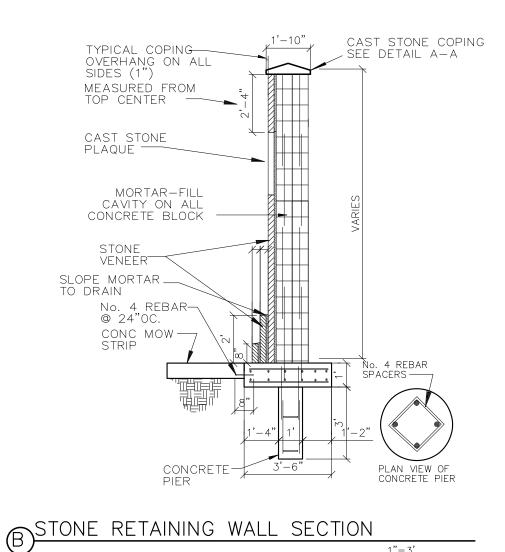

1"=3

GENERAL NOTES

- SEE SHEET 9-10 FOR WALL LOCATION.
- GRADE PLANTING BED TO DRAIN AWAY FROM WALLS.
- TOP OF WALL SHOULD BE EQUAL IN ELEVATION.
- ALL EXCAVATION IS SUPPLEMENTAL TO THE WALL ITEM.
- REBAR TO BE 2" MIN. FROM EDGE OF CONCRETE (TYPICAL) 5.
- MORTAR TO BE $\frac{1}{2}$ " (TYPICAL). COLOR CREAM
- STONE VENEER PROVIDED BY KIRBY STONE CO. OR APPROVED EQUAL.

SAND STONE-LIGHT AUTUMN BLEND, LIGHT COLOR ONLY TOP AND BOTTOM CUT. $3\frac{1}{2}$ DEEP. 4",6",8" MINGLE HEIGHT.

SUBMIT SAMPLES OF ARCHITECTURAL STONE AND MORTAR FOR APPROVAL BY ENGINEER.



1-9-2023

Texas Department of Transportation © 2023

> GATESVILLE **WALL DETAILS**

				Sheet 2 of 4		
DESIGN	FED.RD. DIV.NO.	F	PROJECT NUMBER	HIGHWAY NO.		
GRAPHICS	06	(SEE	(SEE TITLE SHEET)			
	STATE	DISTRICT	COUNTY	SHEET NO.		
CHECK	TEXAS	WACO	CORYELL			
CHECK	CONTROL	SECTION	JOB	12		
	0184	01	068	12		

NOTES:


- 1. SEE LAYOUT PLAN SHEET 9 & 11 FOR WALL LOCATIONS.
- 2. SEE DETAIL SHEET 12, 13 & 14 FOR WALL DETAILS.

AS AVAILABLE FROM: AHI — SUPPLY INC., 2800 GORDON ALVIN, TEXAS 77511 OR APPROVED EQUAL

LOCALLY SOURCED

- 3. SUBMIT SAMPLES OF ARCHITECTURAL CONCRETE MASONRY BLOCK, CAST STONE, AND STONE VENEER FOR APPROVAL BY THE ENGINEER


4. SEE WALL SCHEDULE OF MATERIAL AND FINISHES THIS SHEET FOR MATERIAL AND FINISHES FOR ARCHITECTURAL CONCERT BLOCK, CAST STONE AND STONE VENEER.

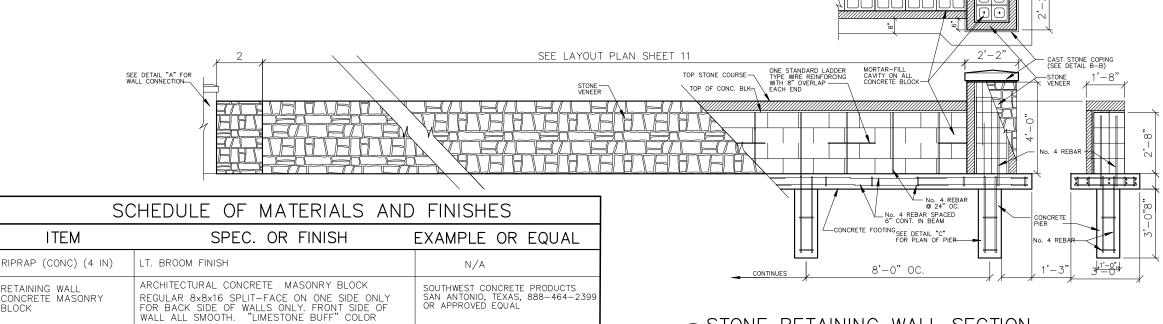

STONE RETAINING WALL SECTION

1/4" = 1'-0"

CONCRETE FOOTING

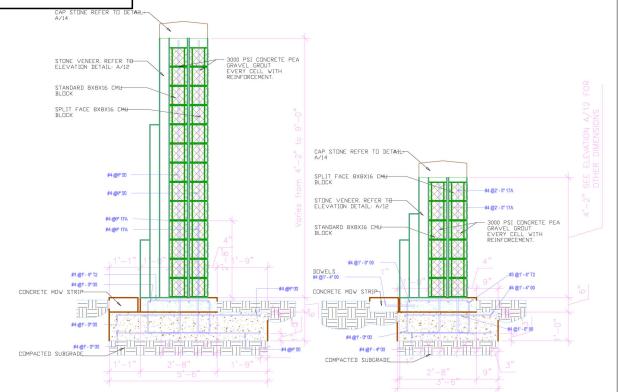

STONE RETAINING WALL SECTIONS

SALOMON L. FLORES

1-9-2023

Texas Department of Transportation © 2023

GATESVILLE **WALL DETAILS**

				Sheet 3 of 4		
DESIGN	FED.RD. DIV.NO.	F	PROJECT NUMBER			
GRAPHICS	06	(SEE	(SEE TITLE SHEET)			
	STATE	DISTRICT	COUNTY	SHEET NO.		
CHECK	TEXAS	WACO	CORYELL			
CHECK	CONTROL	SECTION	JOB	☐ 13 I		
	0184	01	068			

ITEM

RETAINING WALL CONCRETE MASONRY

CAST STONE PRODUCTS

RETAINING WALL (CONC

BLK) STONE VENEER


SMOOTH WHITE LIMESTONE FINISH.
MORTAR COLOR TO MATCH CAST STONE.


3-4" THICK, RANDOM LENGTH & WIDTH. STONE COLOR SHOULD MATCH THAT OF THE GATESVILLE, TX COURTHOUSE.


PROVIDE SHOP DRAWINGS FOR JOINTING, REINF. STEEL, AND WALL CONNECTION DEVICES.

DISTRICT LANDSCAPE ARCHITECT WILL APPROVE ALL STONE PRIOR TO ITS DELIVERY TO THE SITE.

BLOCK

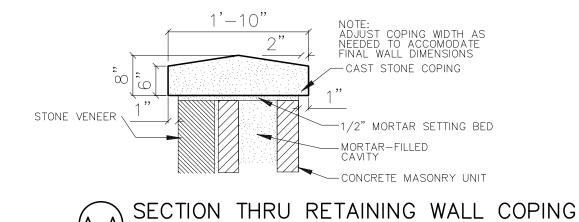


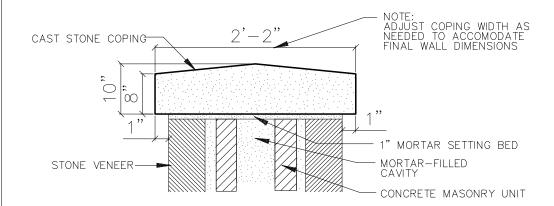

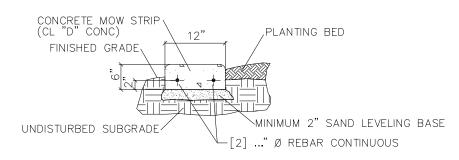

SECTION THRU WALL COLUMN CAP



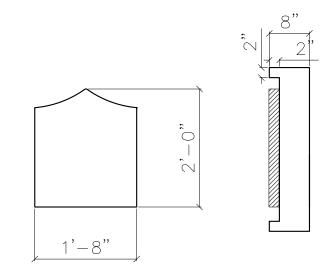



NOTES:

- 1. THE TWO PLAQUES WILL BE FORMED OF THE SAME MATERIAL AS THE OTHER CAST STONE ITEMS IN THIS PROJECT BUT OF A COLOR TO MATCH THE RED STONE OF THE GATESVILLE, TX COURTHOUSE. CONTRACTOR TO SUBMIT 3 OPTIONS FOR REVIEW BY ENGINEER.
- 2. SEE LAYOUT PLAN SHEET 9 FOR WALL LOCATION.
- 3. SEE DETAIL SHEET 12 AND 13 FOR SECTION DETAILS.
- 4. SUBMIT SAMPLES OF ARCHITECTURAL CONCRETE MASONRY BLOCK, CAST STONE, AND STONE VENEER FOR APPROVAL BY THE ENGINEER.
- 5. SEE WALL SCHEDULE OF MATERIAL AND FINISHES SHEET 13 FOR MATERIAL AND FINISHES FOR ARCHITECTURAL CONCERT BLOCK, CAST STONE AND STONE VENEER.
- 6. SUBMIT SHOP DRAWINGS FOR APPROVAL BY ENGINEER.



NOTE:


SEE SCHEDULE OF MATERIALS AND FINISHES FOR SIZES, COLORS, AND EXAMPLES OF BLOCK, STONE, AND CAST STONE PRODUCTS.




Texas Department of Transportation © 2023

GATESVILLE **WALL DETAILS**

				Sheet 4 of 4			
DESIGN	FED.RD. DIV.NO.	F	PROJECT NUMBER				
RAPHICS	06	(SEE	TITLE SHEET)	SH 36			
	STATE	DISTRICT	COUNTY	SHEET NO.			
CHECK	TEXAS	WACO	CORYELL				
CHECK	CONTROL	SECTION	JOB	14			
	0184	01	068	'-			

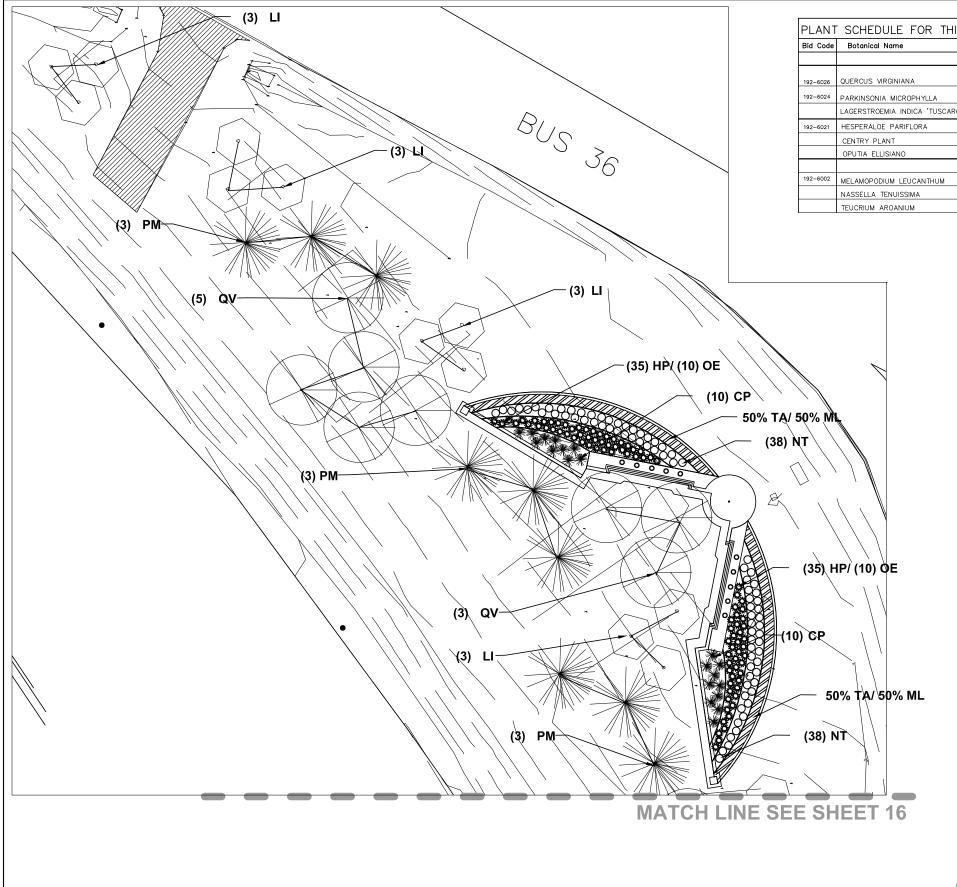

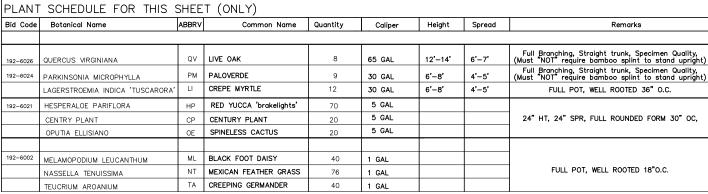

NOTES:

- 1. LOCATE ALL UTILITIES BEFORE BEGINNING CONSTRUCTION
- 2. SEE PLANTING DETAIL SHEET.
- 3. PLANTING PLANS ARE DIAGRAMMATIC REPRESENTATIONS OF PROPOSED WORK AREAS ONLY.
 CONTRACTOR IS RESPONSIBLE FOR LOCATING AND STAKING LIMITS OF EACH BED PREPARATION
 AREA IN ACCORDANCE WITH PLANS. ADJUSTMENTS WILL BE MADE TO ACCOMMODATIONS SITE CONDITIONS.
 ALL LOCATIONS WILL BE APPROVED PRIOR TO ANY BED PREPARATION WORK.








GATESVILLE PLANTING PLAN


PROJECT NUMBER (SEE TITLE SHEET) 06 SH 36 GRAPHICS STATE DISTRICT COUNTY CHECK TEXAS WACO CORYELL CONTROL SECTION JOB CHECK 15 0184 01 068

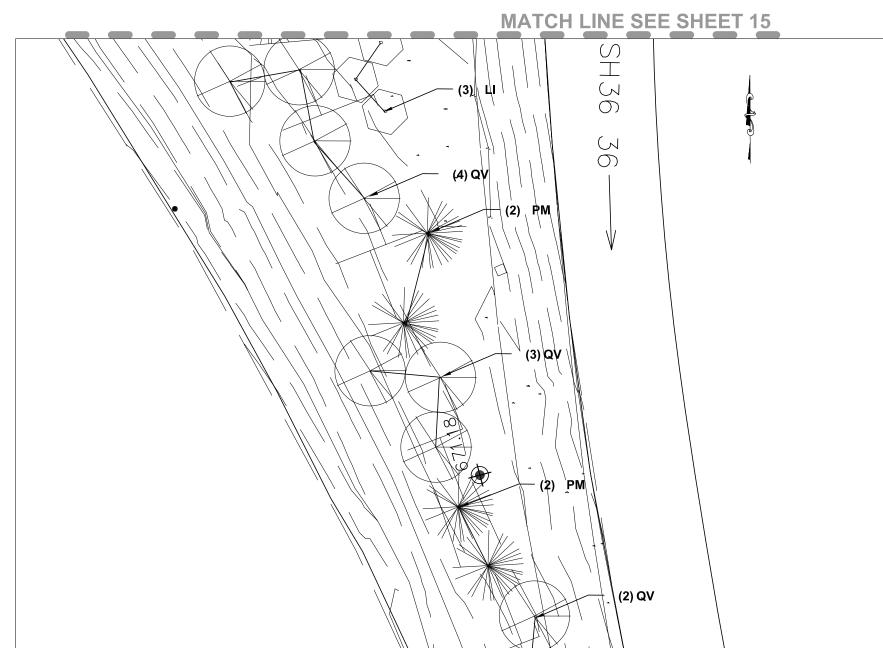

- 1. LOCATE ALL UTILITIES BEFORE BEGINNING CONSTRUCTION
- 2. SEE PLANTING DETAIL SHEET.
- 3. PLANTING PLANS ARE DIAGRAMMATIC REPRESENTATIONS OF PROPOSED WORK AREAS ONLY. CONTRACTOR IS RESPONSIBLE FOR LOCATING AND STAKING LIMITS OF EACH BED PREPARATION AREA IN ACCORDANCE WITH PLANS. ADJUSTMENTS WILL BE MADE TO ACCOMMODATIONS SITE CONDITIONS.
 ALL LOCATIONS WILL BE APPROVED PRIOR TO ANY BED PREPARATION WORK.

PLANT	SCHEDULE FOR THIS S	SHEE	T (ONLY)					
Bid Code	Botanical Name	ABBRV	Common Name	Quantity	Caliper	Height	Spread	Remarks
192-6026	QUERCUS VIRGINIANA	QV	LIVE OAK	9	65 GAL	12'-14'	6'-7'	Full Branching, Straight trunk, Specimen Quality, (Must "NOT" require bamboo splint to stand upright)
192-6024	PARKINSONIA MICROPHYLLA	РМ	PALOVERDE	4	30 GAL	6'-8'	4'-5'	Full Branching, Straight trunk, Specimen Quality, (Must "NOT" require bamboo splint to stand upright)
	LAGERSTROEMIA INDICA 'TUSCARORA'	П	CREPE MYRTLE	3	30 GAL	6'-8'	4'-5'	FULL POT, WELL ROOTED 36" O.C.







Texas Department of Transportation
© 2022 © 2022

> GATESVILLE **PLANTING PLAN**

				Sheet 2 of 2
SIGN	FED.RD. DIV.NO.	F	PROJECT NUMBER	HIGHWAY NO.
PHICS	06	(SEE	TITLE SHEET)	SH 36
	STATE	DISTRICT	COUNTY	SHEET NO.
ECK	TEXAS	WACO	CORYELL	
ECK	CONTROL	SECTION	JOB	16 l
	0184	01	068	'0

PLANT SPECIFICATION	NS)		MINIMUM SPECIFICATIONS						
Botanical Name	ABBRV	Common Name	Color	Quantity	Root Condition	Caliper	Height	Spread	Remarks
									Full Branching, Straight trunk, Specimen Quality, (Must "NOT" require bamboo splint to stand upright)
QUERCUS VIRGINIANA	QV	LIVE OAK		17	CONTAINER	65 GAL	12'-14'	6'-7'	Full Branching, Straight trunk, Specimen Quality, (Must "NOT" require bamboo splint to stand upright)
PARKINSONIA MICROPHYLLA	PM	PALOVERDE		13	CONTAINER	30 GAL	6'-8'	4'-5'	Full Branching, Straight trunk, Specimen Quality, (Must "NOT" require bamboo splint to stand upright)
LAGERSTROEMIA INDICA 'TUSCARORA'	LI	CREPE MYRTLE		15	CONTAINER	30 GAL	6'-8'	4'-5'	FULL POT, WELL ROOTED 36" O.C.
Hesperaloe pariflora	Сс	RED YUCCA 'brakelights'		70					
Centry plant	Po	CENTURY PLANT		20	CONTAINER	5 GAL			24" HT, 24" SPR, FULL ROUNDED FORM 30" OC,
Opuntia ellisiana	Qu	SPINELESS CACTUS		20					
MELAMOPODIUM LEUCANTHUM	EP	BLACK FOOT DAISY		40	CONTAINER	1 GAL			FULL POT, WELL ROOTED 18"O.C.
NASSELLA TENUISSIMA	MF	MEXICAN FEATHER GRASS		76	CONTAINER	1 GAL			FULL POT, WELL ROOTED 18"O.C.
EUCRIUM AROANIUM	TA	CREEPING GERMANDER		40	CONTAINER	1 GAL			FULL POT WELL ROOTED 18" O.C.

PLANT SPECIFICATION NOTES:

- 1. Reference Item 192 of the Texas Standard Specifications for Construction of Highways, Streets and Bridges 2014 for specifications, dimensions, volumes and measurements that are not shown.
- All plants to be nursery grown in containers unless otherwise shown on plans. See SEEDLING NOTES this sheet for additional information.
- 3. Provide photographs of plant material when requested by Engineer.
- Properly handle and maintain plants during delivery, handling, storage, and planting. The Engineer may inspect any phase of work and may reject any plant material improperly handled and/or maintained.
- 5. DELIVERY NOTICE. Provide
 48 hour notice of proposed plant material
 delivery prior to arrival at project or
 storage area.
- 6. DELIVERY TICKETS. For each plant material shipment, provide invoice showing the number, size, and name (common and botanical) of each of the species of plant
- 7. WATERING PLAN(S). Prior to arrival at project or storage area, provide watering plan(s) of plants to be installed or stored. Watering plan(s) must be approved by Engineer prior to delivery to project or storage area.





Texas Department of Transportation
© 2022


© 2022

GATESVILLE

PLANTING SPECIFICATIONS

				Silect 1 Of 0
DESIGN	FED.RD. DIV.NO.	F	HIGHWAY NO.	
GRAPHICS	06	(SEE	SH 36	
	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	WACO	CORYELL	
CHECK	CONTROL	SECTION	JOB	17
	0184	01	068	''
				•

SINGLE & MULTI-TRUNK TREE PLANTING AND BELOW GRADE STAKING PLAN

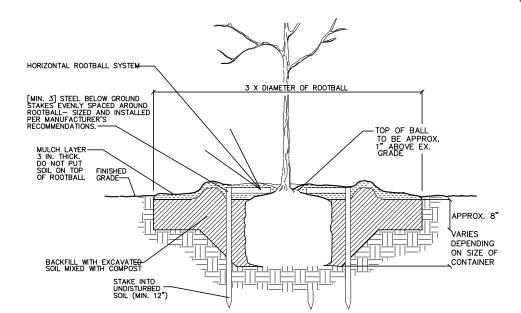

SINGLE & MULTI-TRUNK TREE PLANTING AND BELOW GRADE STAKING SECTION

VEGETATIVE WATERING SCHEDULE FOR: ITEM DESCRIPTION PHASE FREQUENCY RATE Construction/installation operations, Item 192.3 2 times plant Same day as planting JANUARY container **SHRUBS** gallon size per plant 2 times per week 90—day Maintenance period, Item 192.3 through 2 days minimum DECEMBER between waterings 3 month Establishment period, Item 193 Construction/installation Same day as planting operations, Item 192.3 **JANUARY TREES** times plant 90—day Maintenance period, Item 192.3 2 times per week through container gallon 2 days minimum DECEMBER size per plant between waterings 3 month Establishment period, Item 193 Same day as planting & daily for 10 days following, inch of water Construction/installation operations, Item 168.2 then 2 times per week for remainder of Installation through SEEDING DECEMBER 90—day Maintenance period, Item 168.2 Weekly during Maintenance period

NOTES

Provide water necessary to meet the quality and schedule shown above.Construction/installation operations & 90—day Maintenance period water required is subsidiary to Item 192 and will not be paid for separately.

120-day Establishment period will be paid under Item 193-6001.

Rate and frequency may be adjusted to meet site conditions and weather as approved or directed by engineer.

Refer to Item 168.2 for water quality information.

At the time of installation all plants are to be watered manually the same day as planting at a rate and frequency shown above.


Stressed plant material will be rejected according to Item 192.2(B) and replaced.

PLANTING BED PREPARATION

PERFORM PLANTING BED OPERATIONS IN THE FOLLOWING ORDER:


- 1. STAKE BED PREPARATION AREAS OR OTHERWISE DESIGNATE THE PROPER LOCATIONS ACCORDING TO THE PLANS. OBTAIN APPROVAL OF FINAL LOCATIONS BEFORE CONTINUING WORK UNDER THIS ITEM.
- 2. AFTER UNDERGROUND UTILITIES ARE LOCATED AND MARKED, TILL THE BED PREPARATION AREAS TO A DEPTH OF TWELVE (12) INCHES. TAKE SPECIAL PRECAUTION TO AVOID ANY UNDERGROUND UTILITIES WITHIN THE PROJECT AREAS AND DO NOT ALTER EXISTING DRAINAGE PATTERNS
- ADD 4" GENERAL USE COMPOST.COMPOST IS SUBSIDIARY TO ITEM 192-6016, PLANT BED PREPARATION
- 4. TILL/DISC SOIL TO A SMOOTH CONSISTENCY TO A DEPTH OF TWELVE (12) INCHES.
- 5. AFTER PLANTING MULCH BEDS WITH CYPRESS BARK MULCH TO A DEPTH OF 3".



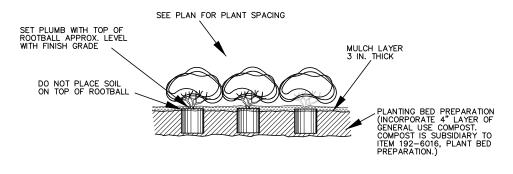

SHRUB PLANTING IN MASS BEDS

NTS

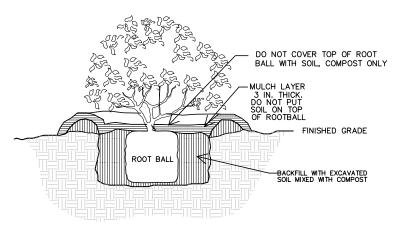

SHRUB AND GROUNDCOVER PLANTING

NTS



Texas Department of Transportation
© 2022

GATESVILLE

PLANTING AND ESTABLISHMENT

				Sheet 1 of 3
DESIGN	FED.RD. DIV.NO.	F	HIGHWAY NO.	
RAPHICS	06	(SEE	TITLE SHEET)	SH 36
	STATE	DISTRICT	COUNTY	SHEET NO.
CHECK	TEXAS	WACO	CORYELL	
CHECK	CONTROL	SECTION	JOB	18
	0184	01	068	

TEMPI ATEN REVISEN: 10-23-

PROJECT CONDITIONS DURING INSTALLATION AND SUSPENSION

During project installation and suspension periods, project site conditions are Contractor's responsibility. Contractor will maintain project site conditions as shown on plans.

All project site maintenance work is incidental and is not paid for separately unless otherwise shown on plans.

Reference pertinent items of the Texas Standard Specifications for Construction and Maintenance of Highways, Streets and Bridges 2014 for specifications, dimensions, volumes and measurements that are not shown. Notify Engineer prior to each site visit, determination of the completeness of work will be done in the presence of the Engineer same day as work activity.

DESCRIPTION OF WORK	TIMELINE
	From BEGINNING OF PROJECT CONSTRUCTION OR SUSPENSION thru END OF CONSTRUCTION/INSTALLATION
WATERING(See PLANTING AND ESTABLISHMENT SHEET 1 of , VEGETATIVE WATERING SCHEDULE FOR TREES, SHRUBS, VINES)	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
MOWING, TRIMMING, AND EDGING (From back of curb, retaining wall, barrier, and riprap to bed preparation areas, otherwise 6' width around outside edge of bed preparation areas, around and between planting bed preparation areas, including areas around any structures within the outer limits adjacent to the roadway) DO NOT MOW, TRIM, OR EDGE WITHIN 3' of ANY TREE	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
PLANT BASIN, BED, AND WORKSITE MAINTENANCE (Includes keeping all inlets within or near the bed preparation areas free of compost. Maintain bed preparation areas as shown below and reshape beds every 30 days or as site conditions and weather require. If no requirement is selected, maintain per Item 192.3.15.3) WEED CONTROL REQUIREMENT See PLANTING AND ESTABLISHMENT SHEET 5 of 6 For Requirements	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
PLANT SUPPORTS See PLANTING AND ESTABLISHMENT SHEET 5 of 6 For Requirements	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
PRUNING (Includes palm plant material and dead, diseased, or damaged palm fronds.)	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
INSECT, DISEASE, AND ANIMAL INSPECTION AND TREATMENT (Exterminate all active ant colonies in bed preparation areas)	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
LITTER AND DEBRIS COLLECTION AND DISPOSAL (Includes planting bed preparation areas and designated mowing limits. In addition, keep all inlets within or near planting bed preparation areas free of debris and litter)	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
TREE TRUNK WRAP AND PROTECTION GUARD REMOVAL AND DISPOSAL (Not applicable)	
PLANT REPLACEMENT *	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
1022-6002 LANDSCAPE TREATMENT (TY 2)(See PLANT BED PREPARATION TYPE III, SHEETS 1 AND 2 of 2, each application will be paid for separately)	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.
IRRIGATION SYSTEM (Only when Item 170 Irrigation System or a temporary irrigation system is part of the contract, see IRRIGATION DETAILS AND MATERIALS SHEET 1 OF 3, GUARANTEE AND ACCEPTANCE)	FOLLOW SAME REQUIREMENTS AND FREQUENCY SHOWN ON PLANTING AND ESTABLISHMENT SHEET 3 OF 4.

^{*} Remove any materials damaged by actions described in Item 7.17.
Removal and disposal of damaged materials is incidental to Item 192.
Contractor may be reimbursed for plant replacement in accordance with Item 7.17.1.
Theft is not a reimbursable repair.





GATESVILLE PLANTING AND ESTABLISHMENT

Sheet 2 of

DESIGN	FED.RD. DIV.NO.	F	PROJECT NUMBER						
GRAPHICS	06	(SEE	SH 36						
	STATE	DISTRICT	SHEET NO.						
CHECK	TEXAS	WACO	CORYELL	NO.					
CHECK	CONTROL	SECTION	JOB	19					
	0184	01	068						

After completion of the project installation, as shown in the plans and approved by the Engineer, begin maintenance activities for a period of 365 calendar days as described in Special Provision 192—001.
Payment in accordance with Special Provision 192—001 is subject to completion of all scheduled maintenance activities, timeline may also be suspended for failure to complete scheduled maintenance activities.
All maintenance work is incidental and is not paid for separately unless otherwise shown on plans.
Reference Item 170 and 192 of the Texas Standard Specifications for Construction and Maintenance of Highways, Streets and Bridges 2014 and Special Specification 1006 for specifications, dimensions, volumes and measurements that are not shown.
Notify Engineer prior to each site visit, determination of the completeness of work will be done in the presence of the Engineer same day as work activity.

DESCRIPTION OF WORK															TIME	LINE	(Days	3)													
	Q		3() C	(5 _. 0		S	90		120)	1	50		180)	2	10		240)	2	 270	1	30	0		 330		 365
	1 Thru	8 1 Thru Th 15 2	6 23 ruThruT 2 30	31 38 hru Thru 37 45	46 53 ThruThr 52 60	61 Tu Thru	68 7 ThruTi 75 8	76 83 hruThru 32 90	91 9 u Thru T 97 1	98 106 1 hru Thru T 05 112 1	13 121 hru Thri 20 127	1 128 1 uThruTl 7 135 1	36 143 hru Thru 42 150	151 15 Thru Th 157 16	58 166 17u Thru 65 172	173 18 Thru Thr 180 18	1 188 1 uThru T 7 195 2	96 203 hru Thr 202 210	211 2 ThruTh 217 2	18 226 1ru Thru 25 232	233 24 Thru Thi 240 24	41 248 Iru Thru 47 255	256 26 Thru Thi 262 27	3 271 ru Thru 0 277	278 28 ThruTh 285 29	36 293 1ru Thru 92 300	301 308 Thru Thru 307 315	316 32 ThruTh 322 3.	23 331 iru Thru 30 338	339 34 ThruTh 346 3	47 355 1ru Thru 54 365
192.3.15.1. WATERING (See PLANTING AND ESTABLISHMENT SHEET 1 of 4, VEGETATIVE WATERING SCHEDULE FOR TREES, SHRUBS, VINES)										///																					
192.3.15.2. MOWING, TRIMMING, AND EDGING (From back of curb, retaining wall, barrier, and riprap to bed preparation areas, otherwise 6' width around outside edge of bed preparation areas, around and between planting bed preparation areas, including areas around any structures within the outer limits adjacent to the roadway) DO NOT MOW, TRIM, OR EDGE WITHIN 3' of ANY TREE										LAST WE	EK OF	MARCH	H, APR	IL, MAY	Y, JUNE	E, JULY	, AUGU	ST, SE	PTEMBI	ER AND	ОСТО	BER								. T	
192.3.15.3. PLANT BASIN, BED, AND WORKSITE MAINTENANCE (Includes keeping all inlets within or near the bed preparation areas free of compost. Maintain bed preparation areas as shown below and reshape beds every 30 days or as site conditions and weather require. If no requirement is selected, maintain per Item 192.3.15.3) WEED CONTROL REQUIREMENT Maintain weed—free per Item 192.3.15.3. Cord trimmers are not allowed. Replace damaged plants per Item 192.15.9. INVASIVE VINES MUST BE CHEMICALLY TREATED, NOT MANUALLY REMOVED. OLEANDER BEDS ONLY.		,					<i>y</i>			<i>y</i> .			/														<i></i>				
Maintain grasses and weeds at 24" maximum height. Eradicate all vines regardless of height, VINES MUST BE CHEMICALLY TREATED, NOT MANUALLY REMOVED. Eradicate invosive shrubs and trees as directed. Method must be either a spotteratment chemical application such as a wick applicator or manual hand pulling of weeds. Hand-pull or trim previously treated dead plants over 24" tall.		<u> </u>							\																						
192.3.15.4. PLANT SUPPORTS(Remove plant stakes and all appurtenances within last 10 days of this schedule unless this Item 192 maintenance period is followed by Item 193 establishment period, unless otherwise directed by Engineer)		/	1	J		r	/	/		/ .	1	1	/		/	/	/	/			/	/	V	"	1	1	J		/	/	I
192.3.15.5. PRUNING (Includes palm plant material and dead, diseased, or damaged palm fronds.)		/		1						/		1			/		/			/		1			1		J			/	
192.3.15.6. INSECT, DISEASE, AND ANIMAL INSPECTION AND TREATMENT (Exterminate all active ant colonies in bed preparation areas)		/	1	J	/	7	1	/	1	/	1	1	/		/	1	1	/		/	/	J	~	"	1	1	/		/	/	1
192.3.15.7. LITTER AND DEBRIS COLLECTION AND DISPOSAL (Includes planting bed preparation areas and designated mowing limits. In addition, keep all inlets within or near planting bed preparation areas free of debris and litter)		/	1	1	<i>,</i>	,	1	/	1	/ .	1	1	1		/	y	1	/		/	y	1	~	/	1	1	1		/	/	/
192.3.15.8. TREE TRUNK WRAP AND PROTECTION GUARD REMOVAL AND DISPOSAL																															
192.3.15.9. PLANT REPLACEMENT * (See Special Provision 192-001)			/		<i>\</i>	,		/	,	,	1		J			J		/			/		\ 	<u> </u>		/		-	<u></u>		/
1022-6002 LANDSCAPE TREATMENT (TY 2)(See PLANT BED PREPARATION TYPE III, SHEETS 1 AND 2 of 2, each application will be paid for separately)	J										/	,															<u>/</u>				
			AF THI	TER FIR EN APP	ST FOLI	AR A	PPLICA LIAR 1	ATION A 80 CA	AS DES	SCRIBED R DAYS	ON PR AFTER	EVIOUS SECON	S SHEE	T, APPI IAR (ON	LY SEC	OND FO	DLIAR 1 SCHED	20 CA ULE IF	ENDAF WITHIN	R DAY A	AFTER RACT T	FIRST TIME).	FOLIAR	2,							
IRRIGATION SYSTEM (Only when Item 170 Irrigation System or a temporary irrigation system is part of the contract, see IRRIGATION DETAILS AND MATERIALS SHEET 1 OF 3, GUARANTEE AND ACCEPTANCE)		/	/	y		,	/	√		<u>/</u>	1	1	y		/	y	1	/			/	y			1				/	/	/

* Remove any materials damaged by actions described in Item 7.17.
Removal and disposal of damaged materials is incidental to Item 192.
Contractor may be reimbursed for plant replacement in accordance with Item 7.17.1.
Theft is not a reimbursable repair.

NOTES:

1. Reference Item 5.10 Inspection of the Texas Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges 2014. At any time during all phases of the contract, any materials or work performed not in accordance with the plans and specifications will be replaced and/or reworked until in compliance.

2. Any adjustments due to the failure to comply with plans and specifications shown will be at Contractors expense.

Work required during defined period of timeline. All work must be completed for entire project.


Texas Department of Transportation
© 2022

GATESVILLE

PLANTING AND ESTABLISHMENT

HIGHWAY NO. FED.RD. DIV.NO. PROJECT NUMBER (SEE TITLE SHEET) 06 SH 36 GRAPHICS STATE DISTRICT COUNTY CHECK TEXAS WACO CORYELL CONTROL JOB CHECK 20 0184 01 068

DATE

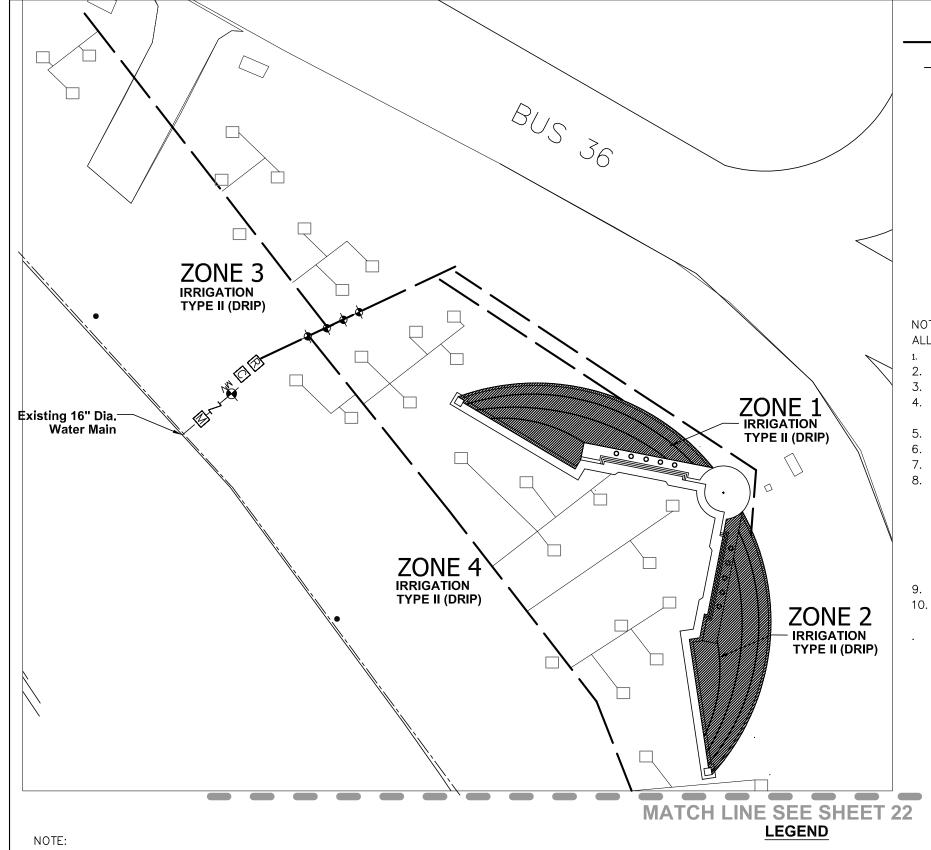

Planting and irrigation site location sheets are diagramatic representations of proposed work areas only. Contractor is responsible for locating and staking limits of each work area in accordance with the plans. Adjustments will be made to accomodate site conditions.

All locations will be approved prior to any work.

POWER POLE

TRAFFIC SIGNAL POLE

UTILITY BOX

--- ROW

--- STORM WATER

SIGN

IRRIGATION LATERAL

IRRIGATION MAINLINE

IRRIGATION LEGEND

IRRIGATION TYPE II, SEE IRRIGATION DETAIL SHEET 2 OF 3 DRIPLINE INSTALLATION - INDIVIDUAL TREE PLANTING

REMOTE CONTROL VALVE

CONTROLLER C

RAIN / FREEZE SENSOR EXISTING

PROPOSED WATER METER (BY OTHERS)

PROPOSED BACKFLOW PREVENTOR

MASTER VALVE ₹-

NOTES AND ADDITIONAL REQUIREMENTS FOR ITEM 170-6003.

ALL NEW PLANTING AREAS WILL REQUIRE IRRIGATION.

- 1. LOCATE ALL EXISTING UTLITIES BEFORE BEGINNING CONSTRUCTION.
- 2. SEE IRRIGATION DETAIL SHEETS FOR ADDITIONAL REQUIREMENTS.
- 3. SYSTEMS PROVIDE TREE, SHRUB, AND GROUNDCOVER IRRIGATION FOR ALL NEW PLANTING.
- 4. ADD BACKFLOW PREVENTERS, VALVES, WIRES, EMISSION DEVICES, ETC. SUBMIT MATERIAL INFORMATION FOR APPROVAL BY CITY AND TXDOT LANDSCAPE ARCHITECT PRIOR TO WORK.
- 5. ALL IRRIGATION TO BE AT FINISH GRADE.
- 6. ENSURE NEW PLANTS ARE IRRIGATED PROPERLY.
- 7. TAG, NUMBER, AND LABEL ALL VALVES WITH INDUSTRY-STANDARD MATERIALS.
- 8. DEVELOP, SEAL AND PROVIDE IRRIGATION SYSTEM AS-BUILT DRAWINGS ON 11x17 SHEETS. SEALED BY LICENSED IRRIGATOR. PROJECT PLANS CAN BE USED FOR THIS PURPOSE. REMOVE EXISTING LANDSCAPE

ARCHITECT SEAL FROM SHEETS. LOCATE HEADS, BOXES, VALVES, CONTROLLERS, METERS,

DEVICES, ADUSTED LATERALS AND MAINLINES, ETC. WHERE POSSIBLE, SHOW EXISTING BORES, MAINLINES, ETC

- 9. CITY OF GATESVILLE TO PROVIDE AND INSTALL WATER METER
- 10. CONTRACTOR TO TIE INTO PROPOSED WATER METER AND INSTALL THE IRRIATION SYSTEM AS SHOWN ON PLANS.






SCALE: 1"=40'-0" 40

GATESVILLE **IRRIGATION PLAN**

FED.RD. DIV.NO. PROJECT NUMBER (SEE TITLE SHEET) 06 SH 36 GRAPHICS STATE DISTRICT TEXAS WACO CORYELL CONTROL SECTION CHECK 21 0184 01 068



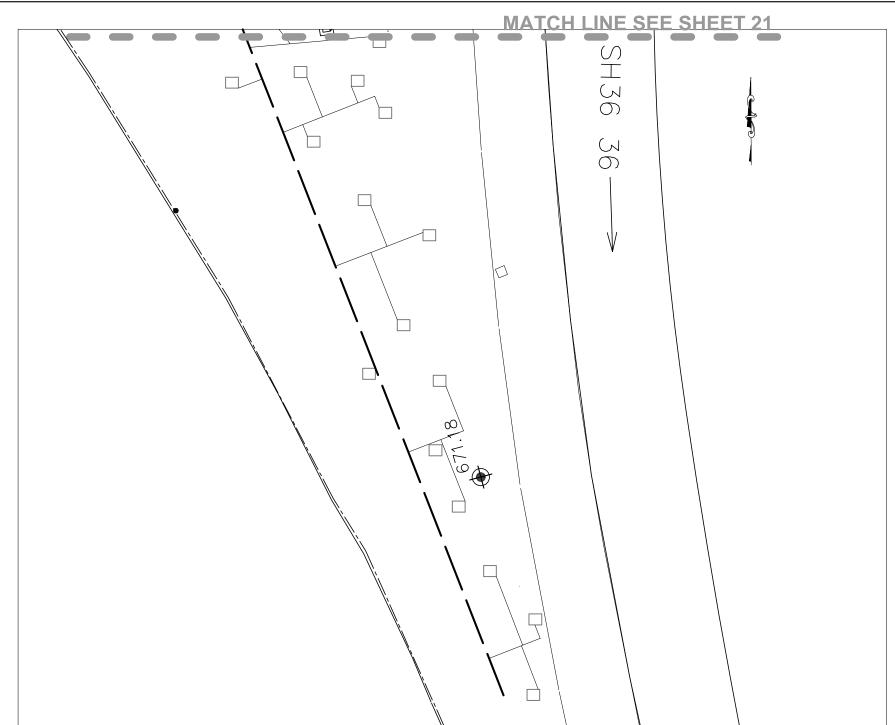

IRRIGATION LEGEND

IRRIGATION MAINLINE

IRRIGATION LATERAL

IRRIGATION TYPE II, SEE IRRIGATION DETAIL SHEET 2 OF 3 DRIPLINE INSTALLATION - INDIVIDUAL TREE PLANTING

REMOTE CONTROL VALVE

CONTROLLER С

R М

RAIN / FREEZE SENSOR EXISTING

PROPOSED WATER METER (BY OTHERS)

PROPOSED BACKFLOW PREVENTOR

MASTER VALVE

NOTES AND ADDITIONAL REQUIREMENTS FOR ITEM 170-6003.

ALL NEW PLANTING AREAS WILL REQUIRE IRRIGATION.

- 1. LOCATE ALL EXISTING UTLITIES BEFORE BEGINNING CONSTRUCTION.
- 2. SEE IRRIGATION DETAIL SHEETS FOR ADDITIONAL REQUIREMENTS.
- 3. SYSTEMS PROVIDE TREE, SHRUB, AND GROUNDCOVER IRRIGATION FOR ALL NEW PLANTING.
- 4. ADD BACKFLOW PREVENTERS, VALVES, WIRES, EMISSION DEVICES, ETC. SUBMIT MATERIAL INFORMATION FOR APPROVAL BY CITY AND TXDOT LANDSCAPE ARCHITECT PRIOR TO WORK.
- 5. ALL IRRIGATION TO BE AT FINISH GRADE.
- 6. ENSURE NEW PLANTS ARE IRRIGATED PROPERLY.
- 7. TAG, NUMBER, AND LABEL ALL VALVES WITH INDUSTRY-STANDARD MATERIALS.
- 8. DEVELOP, SEAL AND PROVIDE IRRIGATION SYSTEM AS-BUILT DRAWINGS ON 11x17 SHEETS. SEALED BY LICENSED IRRIGATOR. PROJECT PLANS CAN BE USED FOR THIS PURPOSE. REMOVE EXISTING LANDSCAPE ARCHITECT SEAL FROM SHEETS. LOCATE HEADS, BOXES, VALVES, CONTROLLERS, METERS, BACKFLOW DEVICES, ADUSTED LATERALS AND MAINLINES, ETC. WHERE POSSIBLE, SHOW EXISTING BORES, MAINLINES, ETC
- 9. CITY OF GATESVILLE TO PROVIDE AND INSTALL WATER METER
- 10. CONTRACTOR TO TIE INTO PROPOSED WATER METER AND INSTALL THE IRRIATION SYSTEM AS SHOWN ON PLANS.

SCALE: 1"=40'-0" 40

NOTE:

Planting and irrigation site location sheets are diagramatic representations of proposed work areas only. Contractor is responsible for locating and staking limits of each work area in accordance with the plans. Adjustments will be made to accomodate site conditions.

All locations will be approved prior to any work.

LEGEND

POWER POLE

TRAFFIC SIGNAL POLE

UTILITY BOX

 $R\square W$

STORM WATER

SIGN





Texas Department of Transportation © 2022

> GATESVILLE **IRRIGATION PLAN**

PROJECT NUMBER (SEE TITLE SHEET) 06 SH 36 GRAPHICS STATE DISTRICT COUNTY TEXAS WACO CORYELL CONTROL JOB CHECK 21 0184 01 068

TYPE OF WORK	REQUIREMENTS
170-6003 IRRIGATION SYSTEM (TY II) LS	FOR ALL IRRIGATION SYSTEM TYPES, THE DESIGN, FURNISH, INSTALLATION, REMOVAL, AND MAINTENANCE OF IRRIGATION SYSTEMS IS INCIDENTAL TO ITEM 170 AND WILL NOT BE PAID FOR SEPARATELY UNLESS OTHERWISE SHOWN.
√	Design, furnish, and install irrigation system in accordance with Item 170 of the Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges 2014, plans, details, and notes. Design is incidental to this item and not paid for separately unless otherwise shown.
√	Provide shop drawings with layout, details, and specifications for approval prior to work.
√	Provide as—built drawings at completion of irrigation system. As—built drawings must be sealed by Licensed Irrigator. See additional notes this sheet for requirements.

IRRIGATION SYSTEM NOTES

GENERAL

GENERAL

1. Reference Item 170 of the Texas Standard Specifications for Construction and Maintenance of Highways, Streets and Bridges 2014 for specifications, dimensions, volumes and measurements not shown.

2. Locate and stake all underground conduits and utilities associated with but not limited to: CTMS, CTMS power supply, lighting, signal wires and detectors, gas, electrical, telephone, fiber optics, etc.

3. Locate and stake existing ground boxes, inlets, culverts, manholes, etc. within the project area with a 4' wooden stake painted orange. Maintain the stakes in place for duration of contract. Remove stakes as directed by engineer.

4. The drawings are diagramatic of the work to be performed. Changes may be required due to varying conditions or as directed by the engineer.

5. Conduct a complete inventory and analysis of site conditions, incidental construction such as boring, mainline adjustment, sidewalk removal and replacement, utility adjustments, etc. will not be paid for seperately unless shown on plans.

will not be paid for seperately unless shown on plans.

6. See IRRIGATION DETAILS AND MATERIALS SHEET 3 of 3 for materials specifications,

see introducing betalls and materials sheet 3 of 3 for materials specifications, sizes, and requirements.
Reference Item 5.10 Inspection of the Texas Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges 2014. At any time during all phases of the contract, any materials or work performed not in accordance with the plans and specifications will be replaced and/or reworked until in compliance.

8. Any adjustments due to the failure to comply with plans and specifications shown will be at contractors expense.

1. Locate and stake irrigation system and related work in the field. Locate all irrigation

Locate and stake irrigation system and related work in the field. Locate all irrigation valves, mainlines, dripline, etc., for approval by the engineer prior to installation. Any adjustments to work performed prior to approval will be incidental.
 Obtain all permits, licenses, tests, and approvals. Pay any fees and deposits and install or arrange for all water meters and taps for installation and operation as applicable. Deposits will not be refunded by TxDOT.
 Install water meter(s). WATER METERS WILL BE PLACED IN NAME OF THE CONTRACTOR THROUGHOUT ENTIRE CONTRACT. The contractor will pay for monthly water charges. Ensure water meter(s) remain operational and turned on for duration of the contract. Upon completion of the contract transfer water meter(s) into name of entity provided by the engineer.
 Install backflow preventer(s). BACKFLOW PREVENTERS WILL BE PLACED IN NAME OF THE CONTRACTOR THROUGHOUT ENTIRE CONTRACT. Pay all charges, fees, tests, and coordination for any backflow preventer(s) testing at installation or annual inspection required by local entity for duration of the contract. Upon completion of the contract transfer backflow preventer(s) into name of entity provided by the engineer.

preventer(s) testing at installation or annual inspection required by local entity for duration of the contract. Upon completion of the contract transfer backflow preventer(s) into name of entity provided by the engineer.

5. Excavation and Trenching Item 170.3.2. Exercise care when excavating near trees. No mechanical trenching is permitted below the canopy of existing trees. Adjust trench path, bore, and/or excavate by hand to avoid damage to existing tree root system. Keep trench bottom clean and smooth with all organic debris and sharp objects removed.

6. Boring Item 170.3.3. Stake boring and sleeve locations for engineer's approval. Bore pit will be minimum of 5 feet from edge of base material or pavement unless otherwise approved by engineer. The size of the bore will not exceed the diameter of the encasement by more than 1 inch. Cover or fill bore pit during non-scheduled work hours.

7. Encasement 170.3.5 Depth is minimum 36 inches below roadway pavement surface. All encasement is continuous and will extend the full width of the pavement and 5' on each side thereof. Encasement is incidental to irrigation system. Install encasement same day as boring.

8. Pipe and Valve Assembly 170.3.6. Do not install pipe when air temperature is below 40 degrees fahrenheit. Cut pipe in a manner that will ensure a square cut. Remove burs prior to installation for a clean, smooth unobstructed flow. Install pipe to an even grade and support pipe continuously on bottom of trench. Snake pipe in trench to allow for contraction and expansion.

9. Sprinkler Heads and Drip Tubing 170.3.7. See note 10 before installing dripline.

10. Closing and Flushing of PVC Pipe 170.3.10. Thoroughly flush all water lines before installing dripline.

11. Hydrostatic Tests 170.3.11. Engineer must be present.

12. Backfill and Compaction 170.3.12. Backfill to correct soil settlement is incidental.

- GUARANTEE AND ACCEPTANCE

 1. Maintenance period. Inspect irrigation system concurrently with, and subject to the same maintenance requirement period under Items 192 and 193. During the installation and maintenance perid perform the following activities as a minimum and to the satisfaction of the engineer:

 A)Install and maintain the controller program to ensure the proper distribution of water (includes replacement of any batteries).

 B)Inspect, repair, and/or replace any equipment that is found defective, damaged or stolen.

 C)Make any adjustments that may become necessary to ensure the proper delivery of water to the plant material.

 2. As—built drawings. Furnish the engineer a set of as—built drawings on reproducible 11x17 sheets upon completion of the installation of the irrigation system. The as—built drawings will be verified that they are a true record of the project conditions. Show all valve locations on drawings by triangulation from a fixed object. Show actual location of main and lateral lines from a fixed object. As—built drawings must be sealed by Licensed Irrigator.

 3. Operating and maintenance data. Provide instructions covering full operation, care and maintenance of the equipment, including a schedule showing time each valve is open to provide determined amount of water, and instruct personnel designated by engineer in proper operation of the system.

-Install backflow preventer enclosure and enclosure footing per manufacturer's recommendations when required as noted on irrigation materials specification sheet Backflow Preventer Gate From meter To system


BACKFLOW PREVENTER ABOVE GROUND INSTALLATION

Type shall meet local code. Local code will

Valve box and lid, flush with finished grade. Box must accomodate each line, valve and fittings. Size of box must allow for easy access/removal of backflow device. Grade Gate Gate # # Backflow From meter Minimum 2 depth of pea gravel below valve Bottom of valve box must extend a min. of 4" below bottom of valve. Box extensions may be required for clearance (typ)


BACKFLOW PREVENTER IN GROUND INSTALLATION

Type shall meet local code. Local code will

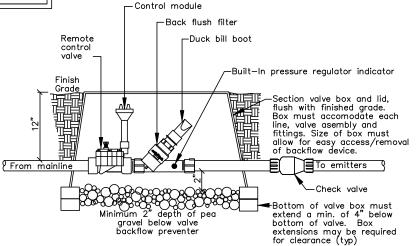

SECTION - PIPING TO/FROM REMOTE CONTROL VALVE ASSEMBLY

REMOTE CONTROL VALVE ASSEMBLY

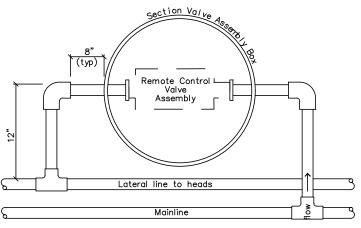

PLAN - PIPING TO/FROM REMOTE CONTROL VALVE ASSEMBLY




IRRIGATION DETAILS AND MATERIALS

SHFFT 1 OF 3

Details not to scale




FILE:	FED	STATE		PROJE	SHEET		
	6	TEXAS		SEE	23		
REVISED:	DIST	COUNTY		CONTROL	SECT	JOB	HIGHWAY
	WACC	CORYEL	L	0184	01	068	SH 36

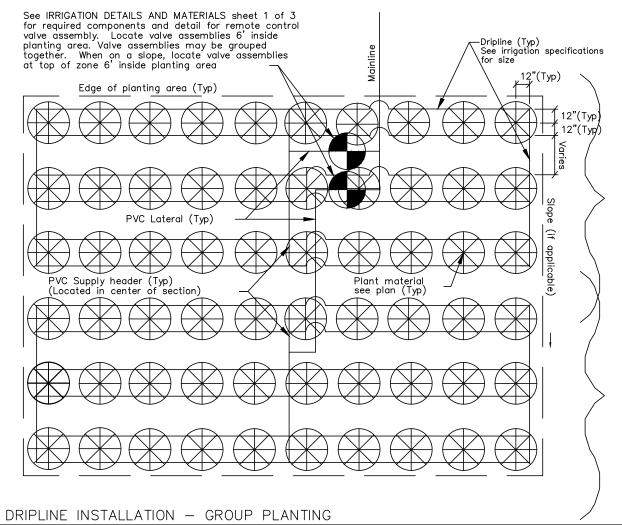


Dripline
Section (Typ)
will be approx.
equal to other
section sizes.
When spaced on
slopes, locate
and size as
shown in plans

Dripline
Section (Typ)
will be approx.
equal to other
section sizes.
When spaced on
slopes, locate
and size as
shown in plans

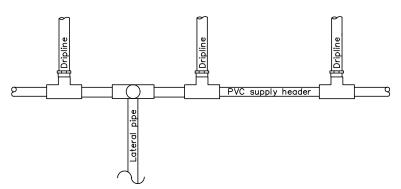


PLAN - RISER/SUPPLY HEADER TO DRIP TUBING

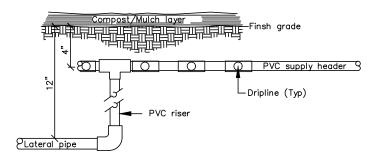

SECTION - RISER/SUPPLY HEADER TO DRIP TUBING

Note: When dripline sections are installed on slopes, schedule controller such that lower sections on slope are operating for shorter lengths of time. Contact engineer and landscape architect for setting length of timed dripline section operation. Total number of emitters and laterals will not allow for section GPM (gallons per minute) to exceed 20 GPM

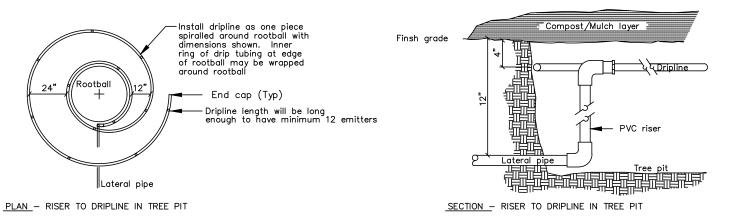

DRIPLINE INSTALLATION - INDIVIDUAL PLANTING


Note: Total number of emitters and laterals will not allow for section GPM (gallons per minute) to exceed 20 GPM



IRRIGATION DETAILS AND MATERIALS

SHEET 2 OF 3

Details not to scale



FILE:	FED	STATE		PROJE	SHEET		
	6	TEXAS		SEE '	24		
REVISED:	DIST	COUNT	COUNTY		SECT	JOB	HIGHWAY
	WACC	CORYEL	CORYELL		01	068	SH 36

IRRIGATION MATERIALS SPECIFICATIONS DESCRIPTION * EXAMPLE OR EQUAL SIZE REMARKS LOCAL CODE MAY REQUIRE LARGER METER 1 1/2 inch minimum TAP /MFTFR LOCAL CODE APPROVED BY LOCAL CODE 1 inch BACKFLOW PREVENTER ENCLOSURE REQUIRED FOR THE FOLLOWING IRRIGATION SYSTEM TYPES: TYPE I APPROVED BY ENGINEER APPROVED BY ENGINEER PROVIDE FOUR(4) KEYS TO ENGINEER IF ENCLOSURE IS REQUIRED TYPE II TYPE IV Enclosure will be approved by the engineer. Enclosure will be manufactured specifically for purpose of protecting backflow preventor. Enclosure will be vandal—resistant, lockable with the ability to be anchored to the ground. Enclosure will be completely removable. Enclosure size will provide access and clearance on all sides of backflow preventer. Locking Locking mechanism will be approved by the engineer. Provide locks and keys. All locks will use same keys unless otherwise directed by the engineer. Keys will match master key provided by engineer or landscape architect. Locks may be integrated into enclosure. RAINBIRD XCZ-100-PRF-BF INCLUDES: BACK FLUSH FILTER and PRESSURE REGULATOR RAINBIRD PRF 100 BFF CHECK VALVE RAINBIRD CV100 DUCK BILL BOOT RAINBIRD DBB CLOSE NIPPLES (1") NELSON CONTROL VALVE WITH CONTROL MODULE Programmable actuator with lithium battery NELSON 8015 ACTUATOR, LITHIUM BATTERY, VALVE 4 inch OVERCUTTING WILL NOT BE ALLOWED PVC SCH 40 ENCASEMENT PIPE FOR SLEEVES AND BORES Pressure rated with slip type solvent welded joints 4 inch REFERENCE ITEM 170.2.C PVC SCH 80 above ground at backflow device 2 inch PIPE RATED FOR DIRECT SUNLIGHT EXPOSURE PVC SCH 40 MAINLINE Pressure rated with twin gasket couplings and fittings or slip type solvent welded joints 2 inch PVC SCH 40 LATERALS AND HEADERS 3/4 inch PVC SCH 80 ABOVE GROUND PIPE PIPE RATED FOR DIRECT SUNLIGHT EXPOSURE BURIED RISERS AND SWING-JOINT COMPONENTS SCH 80 PVC FITTINGS All fittings incorporated into system will be of the same type, size and class material as the pipe 0.6 GAL./HR, 24 inch DRIPPER SPACING Dripline with COPPER SHIELD for Sub-Surface Irrigation RAINBIRD DRIPLINE XFS-06-24 DRIPLINE FITTINGS Use fittings specifically manufactured for all dripline connections, no bending/crimping allowed. CONTROL WIRE All low voltage control wire will be color coded. Wire sizes will conform to the controller manufacturer specifications for maximum distances for specific wire sizes. All wire will be specifically manufactured for direct burial. All wire connections and splices will be made in ground boxes. The splice will be completely waterproof and will be completely encapsulated within a King Safety Sealed Irrigation Connector/Splice enclusure or an approved equal SOLVENT CEMENT Solvent cement will be the type recommended by the pipe manufacturer VALVE BOXES PARLY BOALS Boxes for section valves, below—ground backflow preventors, and quick coupling valves will be as shown on detail sheet VALVE BOX RISERS

IRRIGATION SYSTEM NOTES:
1. Reference IRRIGATION DETAILS AND MATERIALS sheets 1,2 and 3 for details and requirements.
2. Reference to manufacturer's trade name or catalog number is for the purpose of identificatin only, contractor is permitted to furnish like materials of other manufacturer's provided they are of equal quality and comply with specifications for this project.



IRRIGATION DETAILS AND MATERIALS

SHEET 3 OF 3



FILE:	FED	STATE		PROJE	SHEET		
	6	TEXAS		SEE	25		
REVISED:	DIST	COUNTY		CONTROL	SECT	JOB	HIGHWAY
	WACC	CORYEL	L	0184	01	068	SH 36

STORMWATER POLLUTION PREVENTION PLAN (SWP3):

This SWP3 has been developed in accordance with the TPDES Construction General Permit TXR150000 (CGP). The Texas Department of Transportation (TxDOT) ensures that project specifications include adequate best management practices (BMPs) for this project.

For all projects with any soil disturbing activities, TxDOT will maintain a SWP3 with all pertinent records, correspondence, environmental documents, etc. at the project field office. If no field office is available, then this SWP3 shall be kept in the appropriate TxDOT Area Office.

This SWP3 is consistent with requirements specified in applicable stormwater plans and the projects environmental permits, issues, and commitments (EPICs). A copy of the CGP is included in Attachment 2.12 of the SWP3 binder.

1.0 SITE/PROJECT DESCRIPTION

1.1 PROJECT CONTROL SECTION JOB (CSJ):

Construction of Landscape work consisting of planting and irrigation

1.2 PROJECT LIMITS:

From: Intersection .24 miles South of SH 36

To: .2 miles West of BUS 36

1.3 PROJECT COORDINATES:

BEGIN: (Lat) 31.4257947 (Long) -97.71488457

END: (Lat) 31.27048281 (Long) -97.51557350

1.4 TOTAL PROJECT AREA (Acres): 2.5 Acres

1.5 TOTAL AREA TO BE DISTURBED (Acres): 1.5 Acres 60%

1.6 NATURE OF CONSTRUCTION ACTIVITY:

Tree planting, Drip Irrigation, and Landscape Amenity

1.7 MAJOR SOIL TYPES:

Soil Type	Description
MnB	Minwells fine sandy loam, warm, 1 to 3 percent slopes

1.8 PROJECT SPECIFIC LOCATIONS (PSLs):

PSLs must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. PSLs may be identified during preconstruction meetings or during the construction process. Please choose from the options below:

PSLs determined during preconstruction meeting

PSLs determined during construction

No PSLs planned for construction

Туре	Sheet #s

All off-ROW PSLs required by the Contractor are the Contractor's responsibility. The Contractor shall secure all permits required by local, state, federal laws for off-ROW PSLs. The contractor shall provide diagrams, areas of disturbance, acreage, and BMPs for all off-ROW PSLs within one mile of the project.

1.9 CONSTRUCTION ACTIVITIES:

(Use the following list as a starting point when developing the Construction Activity Schedule and Ceasing Record in Attachment 2.5.)

- Mobilization
 ■
 Mobilization
 Note:
 Mobilization
 Mobilization
 Note:
 Mobilization
 Note:
- ⋈ Install sediment and erosion controls
- Blade existing topsoil into windrows, prep ROW, clear and grub
- Remove existing pavement
- Grading operations, excavation, and embankment
- Excavate and prepare subgrade for proposed pavement widenina
- ☐ Remove existing culverts, safety end treatments (SETs)
- ☐ Remove existing metal beam guard fence (MBGF), bridge rail
- ☐ Install proposed pavement per plans
- ☐ Install culverts, culvert extensions, SETs
- ☐ Install mow strip, MBGF, bridge rail
- □ Place flex base
- ☐ Rework slopes, grade ditches
- ☐ Blade windrowed material back across slopes
- ⊠ Revegetation of unpaved areas
- ⋈ Achieve site stabilization and remove sediment and erosion control measures

Other:	

Other:				

1.10 POTENTIAL POLLUTANTS AND SOURCES:

- Sediment laden stormwater from stormwater conveyance over disturbed area
- Fuels, oils, and lubricants from construction vehicles, equipment, and storage
- Solvents, paints, adhesives, etc. from various construction activities
- ☐ Transported soils from offsite vehicle tracking
- ⊠ Construction debris and waste from various construction activities
- Contaminated water from excavation or dewatering pump-out
- Sanitary waste from onsite restroom facilities
- ☐ Trash from various construction activities/receptacles
- □ Long-term stockpiles of material and waste Other:

Othe	ŗ٠.			

1.11 RECEIVING WATERS:

Receiving waters must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. Include Segment # for receiving waters.

Olega: final Waterdands

Tributaries	Classified Waterbody
Leon River above Belton Lake	Classified Freshwater Stream

* Add (*) for impaired waterbodies with pollutant in ().

1.12 ROLES AND RESPONSIBILITIES: TxDOT

- X Development of plans and specifications
- X Submit Notice of Intent (NOI) to TCEQ (≥5 acres)
- X Post Construction Site Notice
- X Submit NOI/CSN to local MS4
- X Perform SWP3 inspections

☐ Other:

- X Maintain SWP3 records and update to reflect daily operations
- X Complete and submit Notice of Termination to TCEQ
- X Maintain SWP3 records for 3 years

	□ Other:			
- 1	_			

☐ Other:	

1.13 ROLES AND RESPONSIBILITIES: CONTRACTOR

- X Day To Day Operational Control
- X Submit Notice of Intent (NOI) to TCEQ (≥5 acres)
- X Post Construction Site Notice
- X Submit NOI/CSN to local MS4
- X Maintain schedule of major construction activities
- X Install, maintain and modify BMPs
- X Complete and submit Notice of Termination to TCEQ
- X Maintain SWP3 records for 3 years

□ Other:

□ Other:			
□ Other:			

1.14 LOCAL MUNICIPAL SEPARATE STORM SEWER **SYSTEM (MS4) OPERATOR COORDINATION:**

MS4 Ent	tity



STORMWATER POLLUTION PREVENTION PLAN (SWP3)



Sheet 1 of 2

DIV. NO.	PROJECT NO.			NO.
9	SEE TITLE SHEET			
STATE	STATE DIST.	c	OUNTY	
TEXAS	WACO	С	ORYELL	
CONT.	SECT.	JOB	HIGHWAY N	10.
0184	01	068	SH 36	

STORMWATER POLLUTION PREVENTION PLAN (SWP3): 2.0 BEST MANAGEMENT PRACTICES (BMPs) AND CONTROLS, INSPECTION, AND MAINTENANCE

The Contractor shall be the responsible party for implementing the BMPs described herein and for complying with the SWP3 for control of erosion and sedimentation during day-to-day operations. The Contractor shall implement changes to this SWP3 approved by TxDOT within the times specified in this SWP3 or the CGP.

2.1 EROSION CONTROL AND SOIL STARII IZATION RMDs.

STADILIZATION DIVIES.
T/P
□ □ Protection of Existing Vegetation
□ □ Vegetated Buffer Zones
□ □ Soil Retention Blankets
□ □ Geotextiles
□ ⋈ Mulching/ Hydromulching
□ ⋈ Soil Surface Treatments
□ Temporary Seeding
□ ⋈ Permanent Planting, Sodding or Seeding
□ □ Biodegradable Erosion Control Logs
□ □ Rock Filter Dams/ Rock Check Dams
□ □ Vertical Tracking
□ □ Interceptor Swale
□ □ Riprap □ □ Diversion Dike
☐ ☐ Diversion blike ☐ ☐ Temporary Pipe Slope Drain
□ □ Embankment for Erosion Control
□ Paved Flumes
Other:
□ Other:
□ Other:
□ Other:
2.2 SEDIMENT CONTROL BMPs:
T/P
□ □ Biodegradable Erosion Control Logs
□ □ Dewatering Controls
□ □ Inlet Protection
□ □ Rock Filter Dams/ Rock Check Dams
□ □ Sandbag Berms
Sediment Control Fence Sediment Con
□ □ Stabilized Construction Exit
□ □ Floating Turbidity Barrier
□ Vegetated Buffer Zones
□ □ Vegetated Filter Strips
Other:
□ □ Other:
□ Other:
□ Other:

located in Attachment 1.2 of this SWP3

Sediment control BMPs requiring design capacity calculations (See SWP3 Attachment 1.3.):

т	1	D
	•	

□ □ Sediment Trap

 □ Calculated volume runoff from 2-year, 24-hour storm for each acre of disturbed area □ 3,600 cubic feet of storage per acre drained
* '
Sedimentation Basin
□ Not required (<10 acres disturbed)
□ Required (>10 acres) and implemented.
 Calculated volume runoff from 2-year, 24-hour storm for each acre of disturbed area
$\hfill\Box$ 3,600 cubic feet of storage per acre drained
□ Required (>10 acres), but not feasible due to:
☐ Available area/Site geometry
□ Site slope/Drainage patterns
☐ Site soils/Geotechnical factors
□ Public safety
□ Other:

2.3 PERMANENT CONTROLS:

(Coordinate post-construction BMPs with appropriate TxDOT maintenance sections.)

BMPs To Be Left In Place Post Construction:

Type Stationing	
From	То
	From

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.4	OFFSILE	VEHICLE	RACKING	CONTROLS:

Excess dirt/mud on road removed daily

 ☐ Haul roads dampened for dust control ☐ Loaded haul trucks to be covered with tarpaulin ☐ Stabilized construction exit
□ Other:

2.5 POLLUTION PREVENTION MEASURES:

☐ Chemical Management
☐ Concrete and Materials Waste Management
☐ Debris and Trash Management
□ Dust Control
□ Sanitary Facilities
□ Other:
□ Other:
□ Other:

2.6 VEGETATED BUFFER ZONES:

Other:

Natural vegetated buffers shall be maintained as feasible to protect adjacent surface waters. If vegetated natural buffer zones are not feasible due to site geometry, the appropriate additional sediment control measures have been incorporated into this SWP3.

Type	Statio	oning
Туре	From	То

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

2.7 ALLOWABLE NON-STORMWATER DISCHARGES:

- X Fire hydrant flushings
- X Irrigation drainage
- X Pavement washwater (where spills or leaks have not occurred, and detergents are not used)
- X Potable water sources
- X Springs
- X Uncontaminated groundwater
- X Water used to wash vehicles or control dust
- X Other allowable non-stormwater discharges as allowed by TPDES GP TXR150000.

2.8 INSPECTIONS:

All disturbed areas and erosion and sediment control devices shall be inspected at least once every seven (7) days. Inspections shall be performed by TxDOT as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.5 of this SWP3.

2.9 MAINTENANCE:

Control measures shall be properly installed according to specifications. If it is determined that a BMP or control measure is not operating effectively, maintenance must be accomplished as soon as possible and before the next anticipated rain event, but in no case later than 7 calendar days after being able to access the site. Maintenance shall be performed by the Contractor as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.5 of this SWP3.



STORMWATER POLLUTION **PREVENTION PLAN (SWP3)**



Sheet 2 of 2

l	FED. RD. DIV. NO.		PROJECT NO.			
I	9		SEE TITLE SHEET 2			
Ī	STATE	TE STATE COUNTY				
I	TEXAS	AS WACO CORYELL				
CONT. SECT. JOB HIGHWAY		10.				
I	0184 01		068 SH 36			

	I. STORMWATER POLLUTION PREVENTION	N PLAN-CLEAN WATE	R ACT SECTION 402					
	TPDES TXR 150000: Stormwater Discharge required for projects with 1 or more acres disturbed soil must protect for erosion and stem 506.	disturbed soil. Projects wi	ith any					
	List adjacent MS 4 Operator(s) that receive discharges from this project. They need to be notified prior to construction activities. (Note: Leave blank only if no adjacent MS 4 Operator(s) are affected.)							
	1.							
	2.							
	1							
	☐ No Action Required	X Required Action						
	Action Number:							
	Prevent stormwater pollution by controlling	erosion and sedimentati	on in					
,	accordance with TPDES Permit TXR 150 2. Comply with the SW3P and revise when r		tion or					
	required by the Engineer. 3. Post Construction Site Notice (CSN) with	,						
	the site, accessible to the public and To	CEQ, EPA or other inspect	ors.					
	4. When Contractor project specific location area to 5 acres or more, submit NOI to		ed soil					
	# # # OD NEAD STOP NA # ATES	000:50 440 455.44	100 OLEMA 184750					
	II. WORK IN OR NEAR STREAMS, WATER ACT SECTIONS 401 AND 404	BODIES AND WEILAR	NDS CLEAN WATER					
	USACE Permit required for filling, dredging,	excavating or other work	in any					
	water bodies, rivers, creeks, streams, wetto allowed in any sream channel below the a		-					
	approved temporary stream crossings or	•						
	The Contractor must adhere to all of the the following permit(s):	terms and conditions ass	ociated with					
	X No Permit Required							
	Nationwide Permit 14 - PCN not Requir wetlands affected)	ed (less than 1/10th acre	waters or					
	☐ Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in	tidal waters)					
	Individual 404 Permit Required							
	Other Nationwide Permit Required: NWP	• 3(o)						
	Required Actions: List Waters of the US Pe and check Best Management Practices plan and post-project TSS. 1.		-					
	2.							
	3.							
	The elevation of the ordinary high water me to be performed in the waters of the US of permit can be found on the Bridge Layouts	equiring the use of a nat	.*					
	Best Management Practices for applic (Note: If CORP Permit not required, do		tions:					
	Erosion Sedimen	tation	Post-Construction TSS					
	☐ Temporary Vegetation ☐ Silt Fe	nce	Vegetative Filter Strips					
	Blankets/Matting Rock	Berm	Retention/Irrigation Systems					
	Mulch Triong	ulor Filter Dike	Extended Detention Bosin					
اے		Bog Berm	Constructed Wetlands					
9	Interceptor Swale	Bale Dîke	Wet Bosin					
Š	Diversion Dike Brush	Berms	Erosion Control Compost					
틸	Erosion Control Compost Erosio Mulch Filter Berm and Socks Mulch	n Control Compost Filter Berm and Socks	Mulch Filter Berm and Socks Compost Filter Berm and Socks					
red by: Nome/Section	Compost Filter Berm and Socks Compost	est Filter Berm and Socks	Vegetation Lined Ditches					
3	Stone	Outlet Sediment Traps	Sand Filter Systems					

Sediment Bosins

Grassy Swales

NO: Notice of Intent

I. U	I I UKAL KESOUKCES			ľ
	Refer to TxDOT Standard Specifications in archeological artifacts are found during co- archeological artifacts (bones, burnt rock, fl work in the immediate area and contact the	nstructio lint, pott	on. Upon discovery of ery, etc.) cease	G
	X No Action Required	-	Required Action	P
	Action Number:			١
	1,			٦
	2.			
	3.			ir
	J.			"
IV.	VEGETATION RESOURCES			
	Preserve native vegetation to the extent Contractor must adhere to Construction 164, 192, 193, 506, 730, 751 & 752 in ord invasive species, beneficial landscaping and	Specific ler to c	ation Requirements Specs 162, omply with requirements for	
	X No Action Required		Required Action	
	Action Number:			
	1,			
	2.			
	3.			
٧.	FEDERAL LISTED, PROPOSED THREA CRITICAL HABITAT, STATE LISTED AND MIGRATORY BIRDS TREATY A	SPECIE	S, CANDIDATE SPECIES	
	☐ No Action Required		Required Action	
	Action Number:			
	1. Follow Special Notes.			
1,	necial Notes: Avoid harming all wildlife species if encountera ave the project site. Due diligence should be		· · · · · · · · · · · · · · · · · · ·	
ho	rming any wildlife species in the implementat	ion of t	ransportation projects.	١,
do	If any of the listed species are observed, ce not disturb species or habitat and contact (the Engi	neer immediately. The	
	rk may not remove active nests from bridg sting season of the birds associated with the	•	-	
	e discovered, cease work in the immediated gineer immediately.	area, an	d contact the	
	The Migratory Bird Act of 1918 states that it is un oture, collect, possess, buy, sell, trade or transport			
you	ung, feather or egg in part or in whole, without a footdance within the Act's policies and regulations.	eder ol pe	rmit issued in	
rer	nove allold migratory bird nests from any struc	ture or t	rees where work would be	l
	ne from October 1 to February 15. In addition, the prevent migratory birds from building nest(s) bet			l
	lhe event that migratory birds are encountered o orts to avoid adverse impacts on protected bird		• • •	l
wo	uld be observed.			┨
.	LIST OF ABBRE			
BMP: COP: DSHS:	Best Management Practice Construction General Permit Texas Department of State Health Services	SPCC: SW5P: PON:	Spill Prevention Control and Countermeasure Storm Water Pollution Prevention Plan Pre-Construction Notification	
	Federal Highway Administration	PSL:	Project Specific Location	
		TOEO:	Texas Commission on Environmental Quality	1
MOA; MOU:	Menor andum of Under standing		Texas Pall utant Discharge Elimination System	ή.
MOA: MOU: M64: MBTA;	Memorandum of Understanding Municipal Separate Stormwater Sewer System Migratory Bird Treaty Act	n TPWD: TxDOT:	Texas Parks and Wildlife Department Texas Department of Transportation	
MOA: MOU: M64: MBTA: MOT: NOT:	Menorandum of Understanding Municipal Separate Stormwater Sewer System	n TPWD: TxDOT: T&E: USACE:	Texas Parks and Wildlife Department	

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

seneral (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with nazardous materials by conducting safety meetings prior to beginning construction and naking workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Safety Data Sheets (SDS) for all hazardous products ised on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the SDS. In the event of a spill, take actions to mitigate the spill as indicated in the SDS, n accordance with safe work practices, and contact the District Spill Coordinator mmediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- Dead or distressed vegetation (not identified as normal)
- Trosh piles, drums, conisters, barrels, etc.
- Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation(s) or replacement(s) (bridge class structures not including box culverts)?

☐ Yes

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the osbestos inspection positive (is osbestos present)?

☐ Yes

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

X] No	Action	Required

Required Action

Action Number:

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

X No Action Required

Required Action

Action Number:

GENERAL NOTE:

Any change orders and/or deviations from the final design must be reported to the Engineer prior to commencement of construction activities, as additional environmental clearance may be required.

© ²⁰²² Texas	Department of	Transportation
	Dallas District	

ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS (EPIC)

FED.RD. DIV.NO.		HIGHWAY NO.	
6	SEE	TITLE SHEET	SH 36
STATE	DISTRICT	COUNTY	3.1. 30
TEXAS	WACO	CORYELL	SHEET
CONTROL	SECTION	JOB	NO.
0184	01	068	28

LAST REVISION:1/15/15

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- 4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- 5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- 6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- 8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- 10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- 11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- 12. The Engineer has the final decision on the location of all traffic control devices.
- 13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travellanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

- Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- 2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT

http://www.txdot.gov

COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)

MATERIAL PRODUCER LIST (MPL)

ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"

STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)

TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)

TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12



Safety Division Standard

BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS

BC(1)-21

50 1 2 1							
FILE:	bc-21.dgn	DN: Tx	:DOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
© TxD0T	November 2002	CONT	SECT	JOB		н	GHWAY
4-03 7-13 9-07 8-14		0184	01	068		SH	1 36
		DIST		COUNTY			SHEET NO.
5-10	5-21	WACO		CORYELL			29

- May be mounted on back of "ROAD WORK AHEAD"(CW20-1D) sign with approval of Engineer. (See note 2 below)
- 1. The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D)sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
- 2. The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK"(G20-2) sign on low volume crossroods (see Note 4 under 'Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texos" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
- 3. Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets. Traffic Control Plan sheets or the Work Zone Standard Sheets.
- 4. The "ROAD WORK NEXT X MILES"(G20-10T) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
- 5. Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads. 6. When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

CW1-4

CW13-1P

Type 3 Barricade or

devices

T-INTERSECTION WORK *** ***G20-9TP * *R20-5T DOUBLE * *R20-50TP ROAD WORK END * *G20-26T WORK ZONE G20-1bTL INTERSECTED 1000'-1500' - Hwy 1 Block - City 1000'-1500' - Hwy 1 Block - City ROADWAY ➾ G20-16TR ROAD WORK WORK ZONE G20-2bT ** G20-5T * * G20-9TP ZONE TRAFFIC G20-6T FINES **X X R20-5T** DOUBLE * * R20-5oTP ROAD WORK

CSJ LIMITS AT T-INTERSECTION

- 1. The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- 2. If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME"(G20-6T) sign behind the Type 3 Barricodes for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow(G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR)" signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING

SIZE

				
Sign Number or Series	Conventional Road	Expressway/ Freeway		
CW20 ⁴ CW21 CW22 CW23 CW25	48" × 48"	48" × 48"		
CW1, CW2, CW7, CW8, C CW9, CW11, CW14	36" × 36" 48'	× 48"		
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	-8" x 48" 48'	' × 48"		

SPACING

Posted Speed	Sign * Spacing "X"
MPH	Feet (Apprx.)
30	120
35	160
40	240
45	320
50	400
55	500 ²
60	600 ²
65	700 ²
70	800 ²
75	900 ²
80	1000 ²
*	* 3

- # For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.
- Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES

- Special or larger size signs may be used as necessary.
- 2. Distance between signs should be increased as required to have 1500 feet odvance warning.
- 3. Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 4.36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroods at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- 5. See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS * *G20-9TP SPEED STAY ALERT LIMIT OBEY * *R20-5T WORK * *G20-5T CW1-4L AHE AD SIGNS IDOURI F CW20-10 ROAD STATE LAW * *R20-5aTP ALK OR TEXT LATER CW13-1P ROAD WORK * *G20-6T R2-1 * * WORK CW1-4R G20-10T * * R20-31 * * AHE AD CONTRACTOR **CA3HA** Type 3 Borricode or WPH CW13-1P CW20-1D \Diamond \Diamond \diamondsuit \Diamond ➾ ➾ ➾ ➾ Beginning of NO-PASSING SPEED END CONE G20-26T * * R2-1 LIMIT $\otimes \times \times$ 3x CSJ Limit END ROAD WORK coordinate When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional with sign "ROAD WORK AHEAD"(CW20-1D)signs are placed in advance of these work areas to remind drivers they are still G20-2 * * NOTES within the project limits. See the applicable TCP sheets for exact location and spacing of signs and The Contractor shall determine the appropriate distance SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

* *G20-9TP

¥ ¥R20-5T

× ×R20-5oTP

SPEED

-CSJ Limi

LIMIT

Ř2-1

* *G20-51

* *G20-6T

END ROAD WORK

G20-2 * *

ROAD

WORK

^ነ₂ MILE

CW2O-1E

ROAD

WORK

AHE AD

CW20-10

ZONE

TRAFFIC

FINES

DOUBLE

SPEED R2-1

LIMIT

STAY ALERT

TALK OR TEXT LATER

G20-10T

OBEY

STATE LAW

➾

END G20-25T **

R20-3T

to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES"(G20-5T)sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.

- ☐ The "BEGIN WORK ZONE"(G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double f workers are present.
- CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D)sign and other signs or devices as called for on the Traffic
- Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND			
I	Type 3 Barricade		
000	Channelizing Devices		
4	Sign		
x	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.		

SHEET 2 OF 12



BARRICADE AND CONSTRUCTION

BC(2)-21

FILE:	bc-21.dgn	DN: Tx	DOT	CK: TxDOT DW: Tx		CK: TxDOT DW: Tx		TxDOT	ck: TxDOT
©TxD0T	November 2002	CONT	SECT	JOB		HIGHWAY			
	REVISIONS	0184	01	068		SH	36		
9-07	8-14	DIST		COUNTY			SHEET NO.		
7-13	5-21	WACO		CORYELL			30		


PROJECT LIMIT

ROAD

CLOSED R11-2

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

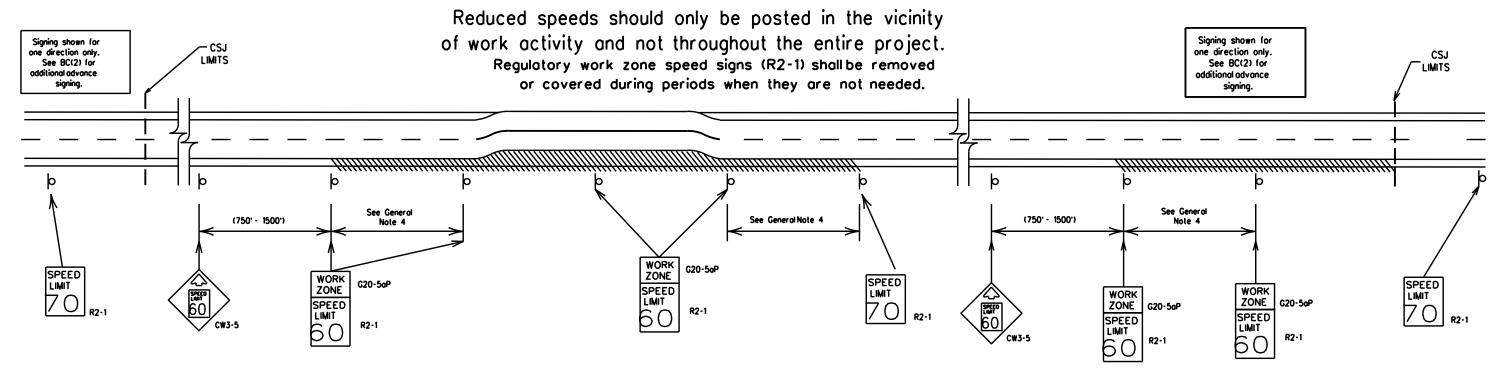

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described obove, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- a) rough road or damaged povement surface
- b) substantial alteration of roadway geometrics (diversions)
- c) construction detours
- d) grade
- e) width

f) other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- 1. Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- 2. Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- 3. Speed zone signs are illustrated for one direction of traveland are normally posted for each direction of travel.
- 4. Frequency of work zone speed limit signs should be:
 - 40 mph and greater 0.2 to 2 miles

35 mph and less

0.2 to 1 mile

- 5. Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- 6. Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE"(G20-5aP) plaque and the "SPEED LIMIT"(R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- 7. Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- 8. Techniques that may help reduce traffic speeds include but are not limited to: A. Law enforcement.
 - B. Flagger stationed next to sign.
 - C. Portable changeable message sign (PCMS).
 - D. Low-power (drone) radar transmitter.
 - E. Speed monitor trailers or signs.
- 9. Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- 10. For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form *1204 in the TxDOT e-form system.

SHEET 3 OF 12




Traffic Safety Division Standard


BARRICADE AND CONSTRUCTION **WORK ZONE SPEED LIMIT**


BC(3)-21


ILE:	bc-21.dgn	DN: TxD	OT	CK: TxDOT DW:		TxDOT	ck: TxDOT	
C) TxDOT	November 2002	CONT	SECT	JOB		н	HIGHWAY	
	REVISIONS	0184	01	068		SH	1 36	
9-07 7-13	8-14 5-21	DIST		COUNTY			SHEET NO.	
7-13	2.51	WACO	CORYELL				31	

TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS










- * When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.
 - * * When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travellane. mentalplaques (advisory or distance) should not cover the surface of the parent sign.

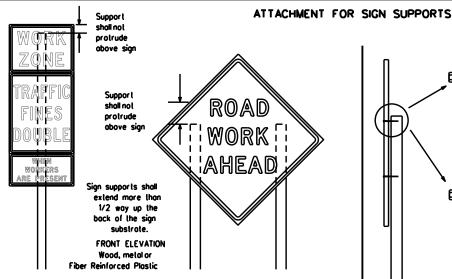

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two SIDE ELEVATION above and two below the spice point. Splice must be located entirely behind

Attochment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

> Nails shall NOT be allowed. Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.


of at least the same gauge material. STOP/SLOW PADDLES


1. STOP/SLOW paddles are the primary method to control traffic by floggers. The STOP/SLOW poddle size should be 24" x 24".

the sign substrate, not near the base of the support. Splice insert lengths

should be at least 5 times nominal post size, centered on the splice and

- 2. STOP/SLOW poddles shall be retroreflectorized when used at night. 3. STOP/SLOW poddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
- 4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.





Bockground - Red Legend & Border - White

Bockground - Orange Legend & Border - Black

SHEETING REC	OUIREMENTS	(WHEN USED AT NIGHT)
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BL ACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

- Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
- When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the
- When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
- If existing signs are to be relocated on their original supports, they shall be installed on croshworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
- If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use croshworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
- Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper auidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

- Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
- Wooden sign posts shall be painted white.
- Barricades shall NOT be used as sign supports.
- All signs shall be installed in occordance with the plans or as directed by the Engineer. Signs shall be used to regulate, worn, and guide the traveling public safely through the work zone.
- 5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been amitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This con include documenting the changes in the inspector's TxDOT diary and having both the inspector and Contractor initial and date the agreed upon changes.
- The Controctor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in occordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
- The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or domaged or marred reflective sheeting as directed by the Engineer/Inspector.
- Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
- . The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Monual on Uniform Traffic Control Devices" Part 6)

- The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
- a. Long-term stationary work that occupies a location more than 3 days.
- b. Intermediate-term stationary work that occupies a location more than one daylight period up to 3 days, or nightlime work losting more than one hour.
- c. Short-term stationary daytime work that occupies a location for more than 1 hour in a single daylight period.
- d. Short, duration work that occupies a location up to 1 hour.
- e. Mobile work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

- SIGN MOUNTING HEIGHT. I. The bottom of Long-term/intermediate-term signs shallbe at least 7 feet, but not more than 9 feet, above the paved surface, except
- as shown for supplemental plaques mounted below other signs.

 2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above
- the ground.
 3. Long-term/intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.

centers. The Engineer may approve other methods of splicing the sign face.

- 4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/intermediate sign height.

 Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

. The Controctor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

- . The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
- All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6"

REFLECTIVE SHEETING

- . All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300
- for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
- White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
- 3. Orange sheeting, meeting the requirements of DMS-8300 Type B or Type G, , shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

- 1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
- 2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be lurned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
- Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
- . When signs are covered, the material used shall be opaque, such as heavy mill black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting. Burloo shall NOT be used to cover sions.
- 6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
- Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

- 1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.

 2. The sandbags will be tied shut to keep the sand from spilling and to maintain a
- 3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.

 Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
- Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
- Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
- Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed nuing with rope, wire, chairs or other tasteriers. Satistages shall be placed along the length of the skids to weigh down the sign support.

 Sandbags shall NOT be placed under the skid and shall not be used to level
- sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be arange or fluorescent red-arange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12


Traffic Safety


Texas Department of Transportation

BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC(4)-21

FILE:	bc-21.dgn	DN: T	DOT	ck: TxDOT	DW:	TxDOT	ck: TxD0
© TxD0T	November 2002	CONT	SECT	JOB		HIC	HWAY
	REVISIONS	0184	01	068		SH	36
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	WACO		CORYELL			32

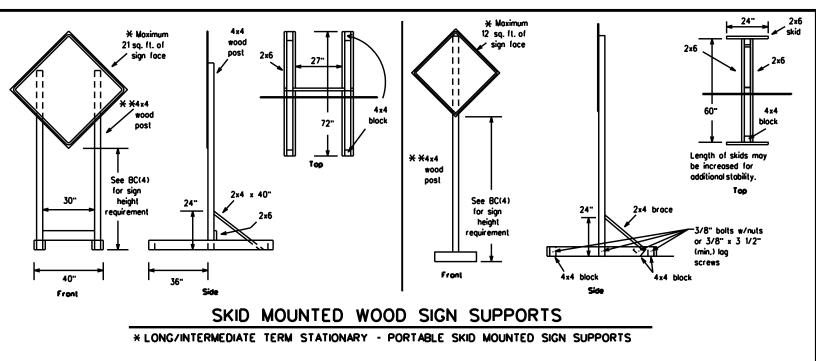

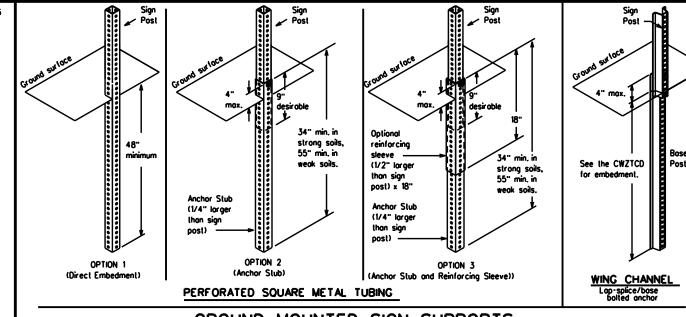


GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support.

The maximum sign square footage shall adhere to the manufacturer's recommendation.

Two post installations can be used for larger signs.

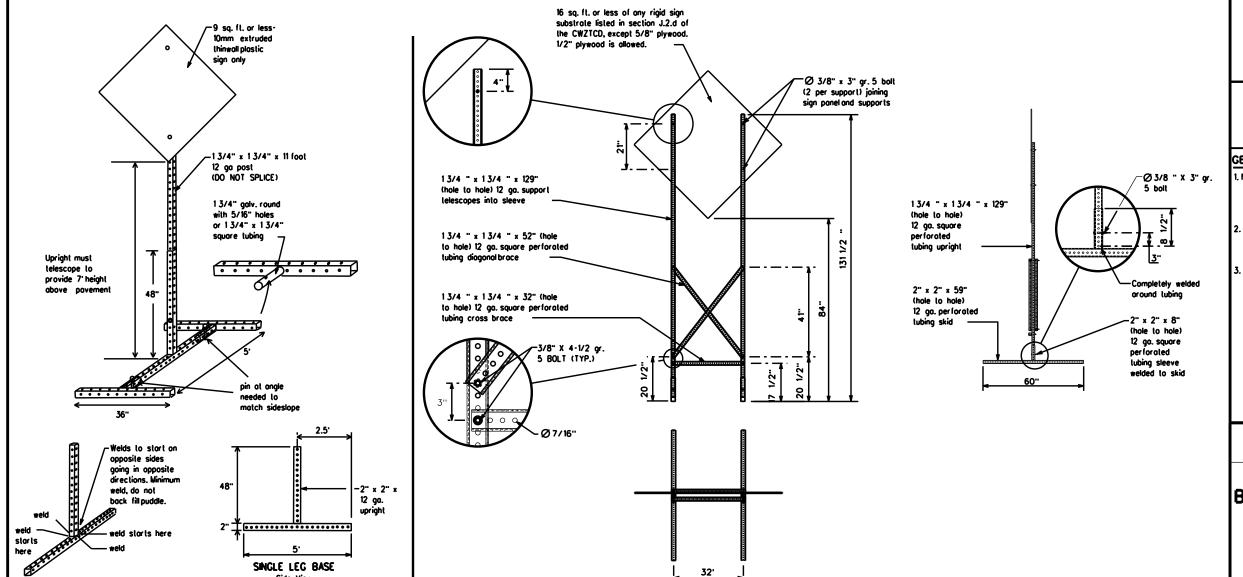

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(11).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE
AND SHORT TERM SUPPORTS CAN BE FOUND ON THE
CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

- Noils may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" log screws must be used on every joint for final connection.
- No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
- When project is completed, all sign supports and foundations shall be removed from the project site.
 This will be considered subsidiary to Item 502.
 - * See BC(4) for definition of "Work Duration."
- ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12

Traffic Safety Division Standard



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

FILE:	bc-21.dgn	DN: T	DOT	ck: TxDOT	DW:	TxDOT	ck: TxD01
© TxDOT	November 2002	CONT	SECT	JOB		HIG	YAW
	REVISIONS	0184	01	068		SH	36
	8-14	DIST		COUNTY		,	SHEET NO.
7-13	5-21	WACO		CORYELL			33

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

2. Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS

3. Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by

4. Use the word "EXIT" to refer to an exit ramp on a freeway: i.e., "EXIT CLOSED." Do not use the term "RAMP."

5. Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.

When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.

7. The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.

8. The Engineer/Inspector may select one of two options which are available for displaying a two phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.

9. Do not "flosh" messages or words included in a message. The message should be steady burn or continuous while displayed.

10. Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line. 11. Do not use the word "Danger" in message.

12. Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.

13. Do not display messages that scroll horizontally or vertically across the face of the sign.

14. The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be obbrevioled, unless shown in the TMUTCO.

15. PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.

16. Each line of text should be centered on the message board rather than left or right justified.

17. If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Rood A	CCS RD	Major MAJ	
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MINR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Cannot	CANT	North	N
Center	CTR	Nor thbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
	EMER	Slippery	SLIP
Emergency		South	S
Emergency Vehicle Entronce. Enter	ENT	Southbound	(route) S
	EXP LN	Speed	SPD
Express Lone	EXPWY	Street	ST
Expressway XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
reeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving		Traffic	TRAF
Hazardous Material		Trovelers	TRVLRS
High-Occupancy	HOV	Tuesday	TUES
Vehicle	nuv	Time Minutes	TIME MIN
Highway	HWY	Upper Level	UPR LEVEL
Hour (s)	HR. HRS	Vehicles (s)	VEH, VEHS
Information	INFO	Warning	WARN
intormotion	ITS	Wednesday	WED
Junction	JCT	- Weight Limit	WT LIMIT
Left	LFT	- West	W
Left Lane	LFT LN	- Westbound	(route) W
Lett Lane Lane Closed	LN CLOSED	- Wet Povement	WET PVMT
Lone Closed	LWR LEVEL	Will Not	WONT
Maintenance	MAINT	1	

designation * IH-number, US-number, SH-number, FM-number

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

Phase 1: Condition Lists

Road/Lane/Ramp	Closure List	Other Condition	on List
FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED	ROADWORK XXX FT	ROAD REPAIRS XXXX FT
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT	FLAGGER XXXX FT	LANE NARROWS XXXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT	RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
RIGHT X LANES CLOSED	RIGHT X LANES OPEN	MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
CENTER	DAYTIME	LOOSE	UNEVEN

LANE **GRAVEL** LANE LANES CLOSED CLOSURES XXXX FT XXXX FT NIGHT I-XX SOUTH DETOUR **ROUGH** LANE EXIT X MILE ROAD **CLOSURES** CLOSED

XXXX FT **VARIOUS EXIT XXX ROADWORK** ROADWORK CLOSED IANES PAST NEXT CLOSED X MILE SH XXXX FRI-SUN EXIT RIGHT LN BUMP US XXX CLOSED TO BE XXXX FT **CLOSED** X MILES

X LANES MALI DRIVEWAY CLOSED TUE - FRI CLOSED

XXXXXXX BLVD

CLOSED

LANES

SHIF T

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

TRAFFIC

SIGNAL

XXXX FT

APPLICATION GUIDELINES

1. Only 1 or 2 phases are to be used on a PCMS. 2. The 1st phase (or both) should be selected from the

"Road/Lane/Ramp Closure List" and the "Other Condition List". 3. A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phose Lists".

4. A Location Phase is necessary only if a distance or location is not included in the first phase selected.

5. If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.

6. For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

Phase 2: Possible Component Lists

Action to Take/Effe		Location List	Warning List	* * AdvanceNotice List
MERGE RIGHT	FORM X LINES RIGHT	AT FM XXXX	SPEED LIMIT XX MPH	TUE-FRI XX AM- X PM
DETOUR NEXT X EXITS	USE XXXXX RD EXIT	BEFORE RAILROAD CROSSING	MAXIMUM SPEED XX MPH	APR XX- XX X PM-X AM
USE EXIT XXX	USE EXIT I-XX NORTH	NEXT X MILES	MINIMUM SPEED XX MPH	BEGINS MONDAY
STAY ON US XXX SOUTH	USE I-XX E TO I-XX N	PAST US XXX EXIT	ADVISORY SPEED XX MPH	BEGINS MAY XX
TRUCKS USE US XXX N	WATCH FOR TRUCKS	XXXXXXX TO XXXXXXX	RIGHT LANE EXIT	MAY X-X XX PM - XX AM
WATCH FOR TRUCKS	EXPECT DELAYS	US XXX TO FM XXXX	USE CAUTION	NEXT FRI-SUN
EXPECT DELAYS	PREPARE TO STOP		DRIVE SAFELY	XX AM TO XX PM
REDUCE SPEED XXX FT	END SHOULDER USE		DRIVE WITH CARE	NEXT TUE AUG XX
USE OTHER ROUTES	WATCH FOR WORKERS			TONIGHT XX PM- XX AM
STAY IN LANE *		× × Sec	e Application Guidelines No	de 6.

WORDING ALTERNATIVES

- 1. The words RIGHT, LEFT and ALL can be interchanged as appropriate. 2. Roodway designations IH, US, SH, FM and LP can be interchanged as
- appropriate.
 3. EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- 5. ROAD, HIGHWAY and FREEWAY can be interchanged as needed
- 6. AHEAD may be used instead of distances if necessary.
- 7. FT and MI, MILE and MILES interchanged as appropriate.
- 8. AT, BEFORE and PAST interchanged as needed
- 9. Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

1. When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" obove.

2. When symbol signs, such as the "Flagger Symbol"(CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above. 3. When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute

for, or replace that sign, 4. A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

SHEET 6 OF 12




BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)

BC(6)-21

		-						
FILE:	bc-21.dgn	DN: TxDOT		CK: TxDOT DW:		TxDOT	ck: TxDOT	
© TxD0T	November 2002	CONT SECT		JOB		н	HIGHWAY	
	REVISIONS	0184	01	068		SI	1 36	
9-07	8-14	DIST	COUNTY			SHEET NO.		
7-13	5-21	WACO	WACO CORYELL		34			


۵۵۵

- 1. Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- 2. Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiory to Item 512.

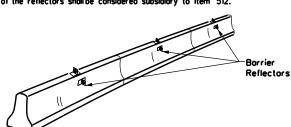

CONCRETE TRAFFIC BARRIER (CTB)

- 3. Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two vellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one vellow reflective face, as shown in the detail above.
- 5. When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- 6. Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- 7. Maximum spacing of Barrier Reflectors is forty (40) feet.
- 8. Povement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- 9. Attachment of Barrier Reflectors to CTB shall be per manufacturer's
- 10.Missing or damaged Barrier Reflectors shall be replaced as directed
- 11. Single slope barriers shall be delineated as shown on the above detail.



zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB. Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.


LOW PROFILE CONCRETE

IN WORK ZONES

BARRIER (LPCB) USED

LPCB is approved for use in work

LOW PROFILE CONCRETE BARRIER (LPCB)

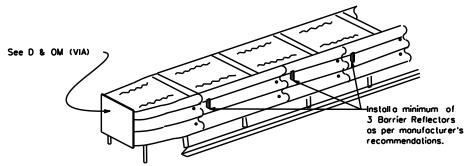


DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTR's in work zones shall meet the apppropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

Type C Warning Light or approved substitute mounted on a drum adjacent to the travelway.



Warning reflector may be round or square.Must have a yellow reflective surface area of at least 30 square inches

WARNING LIGHTS

- 1. Warning lights shall meet the requirements of the TMUTCD.
- 2. Warning lights shall NOT be installed on barricades.
- 3. Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B or C Specifical meeting the requirements of Departmental Material Specification DMS-8300.
- 4. Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control
- devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB"
- 5. The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- 6. When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the worning lights meet the requirements of the lotest ITE Purchase Specifications for Floshing and Steady-Burn Warning Lights.
- 7. When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- 8. The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS

- 1. Type A floshing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- 2. Type A random floshing warning lights are not intended for delineation and shall not be used in a series.
- 3. A series of sequential lashing warning lights placed on channelizing devices to form a merging laper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shallbe 65 flashes per minute, plus or minus 10 flashes.
- 4. Type C and D steady burn warning lights are intended to be used in a series to delineate the edge of the travellane on detaurs on lane changes, on lane closures, and on other similar conditions.
- 5. Type Å, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- 6. Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- 7. The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.


WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- 1. A worning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn worning light at the discretion of the Contractor unless otherwise noted in the plans.
- 2. The worning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- 3. The worning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- 4. Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- 5. Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- 6. The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- 7. When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- 8. The warning reflector should be mounted on the side of the handle nearest approaching traffic.
 9. The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- 1. The Floshing Arrow Board should be used for all lone closures on multi-lane roadways, or slow
- moving maintenance or construction activities on the travellanes.

 2. Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- 4. The Flashing Arrow Board should be able to display the following symbols:

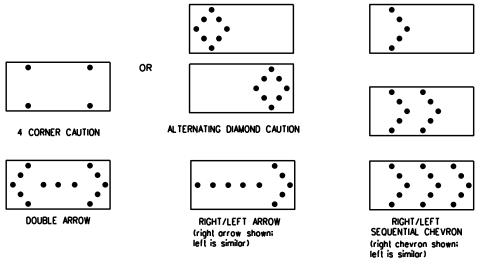

- 5. The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating
- Diamond Caution mode as shown.
- 6. The straight line coution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage.

 The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.

 Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- 9. The sequential arrow display is NOT ALLOWED.

- The sequential arrow display is NOT ALLOWED.
 The floshing arrow display is the TxDOT standard: however, the sequential chevron display may be used during daylight operations.
 The Floshing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
 A Floshing Arrow Board SHALL NOT BE USED to laterally shift traffic.
 A full matrix PCMS may be used to simulate a Floshing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
 Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panet.

	REQUIREMENTS								
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE						
В	30 × 60	13	3/4 mile						
С	48 × 96	15	1 mile						

ATTENTION Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- 1. Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Monual for Assessing Safety Hordware (MASH). 2. Refer to the CWZTCD for the requirements of Level 2 or
- 3. Refer to the CWZTCD for a list of approved TMAs. 4. TMAs are required on freeways unless otherwise noted
- 5. A TMA should be used anytime that it can be positioned
- 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.

 6. The only reason a TMA should not be required is when a work
- area is spread down the roadway and the work crew is an extended distance from the TMA.



Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION ARROW PANEL. REFLECTORS. WARNING LIGHTS & ATTENUATOR

BC(7)-21

FILE:	bc-21.dgn	DN: T	DOT	ck: TxD0T	DW:	TxDOT	ск: Тх	:DO
© 1xD01	November 2002	CONT	SECT	JOB		HIG	HWAY	
	REVISIONS	0184	01	068		SH	36	
	8-14	DIST		COUNTY			SHEET N	10.
7-13	5-21						7.5	

GENERAL NOTES

- 1. For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- 2. For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in langent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- 3. For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- 4. Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 5. Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- 6. The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:

- 1. Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- 2. The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- 3. Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- 4. Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- 5. The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved
- 6. The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectorized space between any two adjacent stripes shall not exceed 2 inches in
- 7. Boses shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- 8. Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material. 9. Drum body shall have a maximum unballasted weight of 11 lbs. 10.0rum and base shall be marked with manufacturer's name and model number.


RETROREFLECTIVE SHEETING

- 1. The stripes used on drums shall be constructed of sheeting meeting the color and retrorellectivity requirements of Deportmental Materials


 Specification DMS-8300, "Sign Face Materials." Type A or Type B
 reflective sheeting shall be supplied unless otherwise specified
- 2. The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain othered in place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to obrasion of the sheeting

BALLAST

- 1. Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavemen surface may not exceed 12 inches.
- 2. Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- 3. Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- 4. The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- 5. When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- 6. Ballast shall not be placed on top of drums
- 7. Adhesives may be used to secure base of drums to povement.

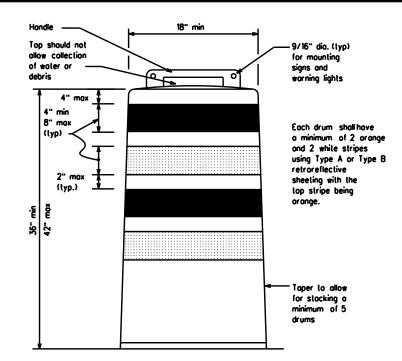




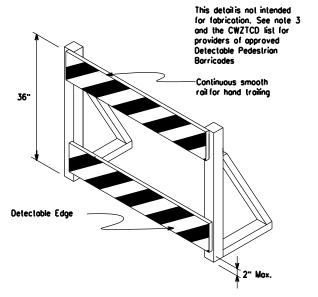

DETECTABLE PEDESTRIAN BARRICADES

- 1. When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- 2. Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- 3. Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian
- 4. Tone, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian
- 5. Warning lights shall not be attached to detectable pedestrian
- 6. Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign (Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel mount with diagonals sloping down lowerds travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- 1. Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- 2. Chevrons and other work zone signs with an orange background shall be manufactured with Type B or Type C Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- 3. Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- 4. Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below
- 5. Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each
- 6. Mounting bolls and nuts shall be fully engaged and adequately larqued. Bolts should not extend more than 1/2
- 7. Chevrons may be placed on drums on the outside of curves, on merging topers or on shifting topers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- 8. R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12





Traffic Safety

IBARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8)-21

	. — .						
FILE: bc-21.dgn	DN: TxDOT CK: TxD		ck: TxDOT	:TxDOT Dw: TxDO		ck: TxDOT	
© TxDOT November 2002	CONT SECT JOB HIC		HIGI	YAWH			
REVISIONS	0184	01	068		SH	36	
4-03 8-14 9-07 5-21	DIST	DIST COUNTY			,	SHEET NO.	
7-13	WACO	CORYELL				36	

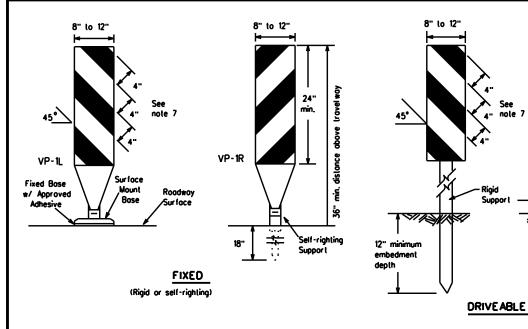


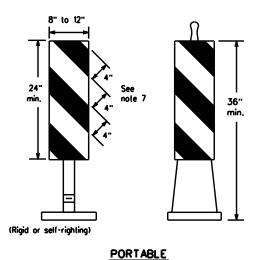

1. Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.


- 2. VP's may be used in daylime or nightlime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daylime and nightlime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's
- 3. VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective arange and reflective white and should always slope downward toward the travellane.
- 4. VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- 5. Self-righting supports are available with portable base. "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 6. Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- 7. Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

VERTICAL PANELS (VPs)

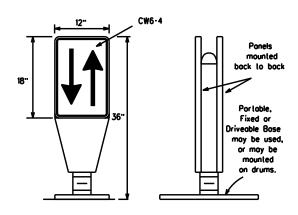

- 1. Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the povement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- 2. The OTLD may be used in combination with 42"
- 3. Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing
- 4. The OTLD shall be arange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)



8" to 12"


Fixed Base w/ Approved Adhesive (Driveoble Bose, or Flexible Support can be used)

- 1. The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- 2. Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- 3. Chevrons, when used, shall be erected on the outside of a sharp curve or lurn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- 4. To be effective, the chevron should be visible for at least 500 feet.
- 5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B or Type C configring to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- 6. For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

GENERAL NOTES

- 1. Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform, and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- 2. Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- 3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- 4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, foded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spocing and alignment.
- 5. Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- 6. Povement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's
- 7. The installation and removal of channelizing devices shall not cause detrimental effects to the final povement surfaces, including povement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.



LONGITUDINAL CHANNELIZING DEVICES (LCD)

- 1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- 2. LCDs may be used instead of a line of cones or drums.
- 3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- 5. LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travellanes.
- 6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for borricode rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballosted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) croshworthiness requirements based on
- 2. Water ballosted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nightlime visibility. They may also be supplemented with povement markings.
- 3. Water bollasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- 4. Water ballosted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a laper in a low speed urban area, the laper shall be delineated and the laper length should be designed to optimize road user operations considering the available geometric conditions.
- 5. When water ballosted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flored to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballosted systems must have a continuous detectable bottom for users of long canes and the top I the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

Posted Speed	Formula	0	esiroble er Leng x x		Suggested Maximum Spacing of Channelizing Devices		
		10° Offset	11 [.] Offset	12' Offset	On a Taper	On a Tangent	
30	2	150 ⁻	165'	180'	30.	60.	
35	L. <u>ws²</u>	205	225'	245'	35'	70'	
40] **	265	295'	320	40'	80.	
45		450'	495'	540	45'	90.	
50	1	500	550	600	50'	100'	
55	l.ws	550	605	660	55'	110'	
60] " " " "	600 .	660	720	60'	120'	
65]	650'	715'	780	65 [.]	130'	
70]	700'	770'	840	70'	140'	
75		750	825'	900.	75'	150'	
80		800	880.	960	80.	160'	

x x Toper lengths have been rounded off. L-Length of Toper (FT.) W-Width of Offset (FT.) S-Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12




Division


BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(9)-21


	-	,,,,	•	_	• •			
ILE:	bc-21.dgn	DN:	T	kDOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
C) TxDOT	November 2002	co	NT	SECT	JOB		Н	IIGHWAY
	REVISIONS	01	84	01	068		5	SH 36
9-07	8-14	DIS	т		COUNTY			SHEET NO.
7-13	5-21		~~		CORVELL			3.7

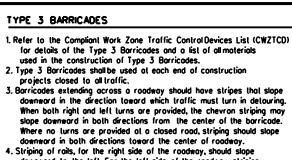

- downward to the left. For the left side of the roadway, striping should slope downward to the right.
- 5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
- 6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided
- 7. Worning lights shall NOT be installed on barricades.
- Where barricodes require the use of weights to keep from turning over, the use of sandbogs with dry, cohesionless sand is recommended. The sandbags will be lied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as lire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
- 9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

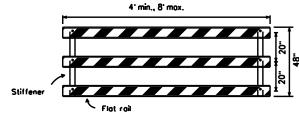



Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

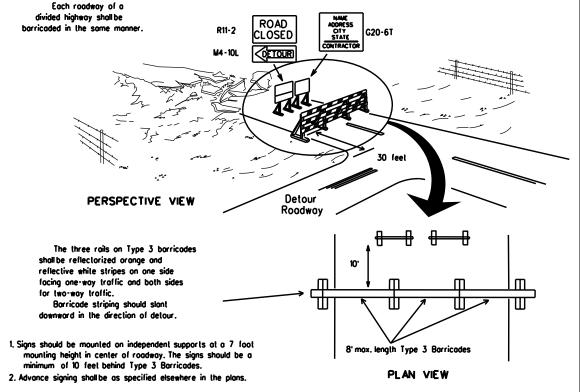

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

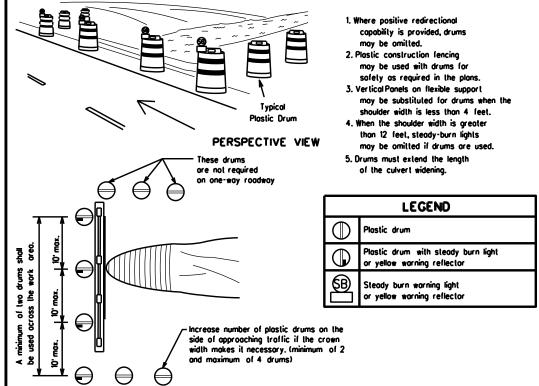

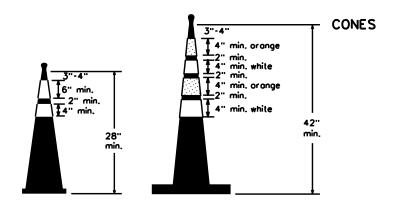

Two-Piece cones


PLAN VIEW

2" to 6" 3" min.

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

One-Piece cones

Tubular Marker

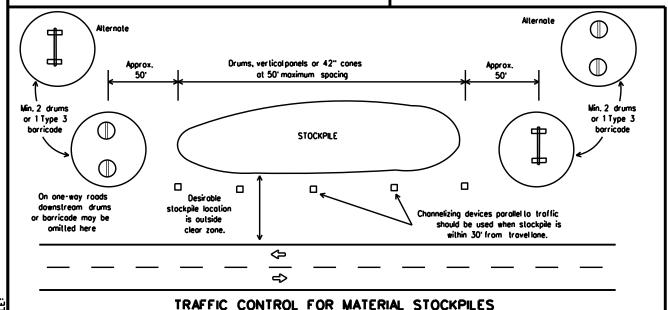

28" Cones shall have a minimum weight of 9 1/2 lbs.

42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

- 1. Traffic cones and lubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
- 2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two piece cones have a cone shaped body and a separate rubber base. or bollost, that is added to keep the device upright and in place.
- 3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
- 4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
- 5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
- 6. 42" two-piece cones, vertical panels or drums are suitable for all work zone
- 7. Cones or lubular markers used on each project should be of the same size and shape.

SHEET	10	OF	12
-------	----	----	----



BARRICADE AND CONSTRUCTION

Traffic Safety Division Standard

CHANNELIZING DEVICES

BC(10)-21

E:	bc-21.dgn	DN: Tx	DOT	ck: TxDOT	DW:	TxDOT	ck: TxDOT
) TxDOT	November 2002	CONT	SECT	JOB		HIC	SHWAY
	REVISIONS	0184	01	068		SH	36
9-07	8-14	DIST		COUNTY			SHEET NO.
7-13	5-21	WACO		CORYELL			38

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing povement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, potterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental povement marking details may be found in the plans or specifications.
- Povement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCO, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- 6. When standard povement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where possing is prohibited and PASS WITH CARE signs at the beginning of sections where possing is permitted.
- 7. All work zone povement markings shall be installed in accordance with Item 662, "Work Zone Povement Markings."

RAISED PAVEMENT MARKERS

- Roised povement markers are to be placed according to the patterns on BC(12).
- All roised povement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated povement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated povement markings (fail back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone povement markings within the work limits.
- Work zone povement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- 3. The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion
 or direct a motorist toward or into the closed portion of the roadway
 shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Povement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Povement Markings and Markers".
- The removal of povement markings may require resurfacing or seal cooting portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type povement may be used.
- Blost cleaning may be used but will not be required unless specifically shown in the plans.
- 7. Over-pointing of the markings SHALL NOT BE permitted.
- 8. Removal of raised pavement markers shall be as directed by the
- Removal of existing povement markings and markers will be poid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- 10.Block-out marking tope may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

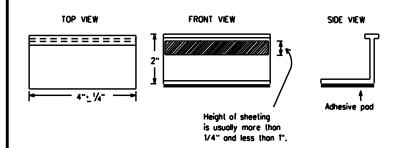

STAPLES OR NAILS SHALL NOT BE USED TO SECURE TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS TO THE PAVEMENT SURFACE

- Temporary flexible-reflective roodway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- 2. Tobs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - A. Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - B. Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic povement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- 3. Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new povements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised povement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemorks shall be designated as: YELLOW - (two amber reflective surfaces with yellow body). WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised povement markers, non-reflective traffic buttons, roadway marker tabs and other povement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12

Traffic Safety




Texas Department of Transportation


BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS


BC(11)-21

	• • • •	′ 4	4 •			
FILE: bc-21.dgn	DN: T	:DOT	ck: TxDOT	DW:	TxDOT	ск: ТхDОТ
©⊤xDOT February 1998	CONT	SECT	JOB		H	IIGHWAY
REVISIONS 2-98 9-07 5-21	0184	01	068		9	SH 36
2-98	DIST		COUNTY			SHEET NO.
11-02 8-14	WACO		CORYELL			39

PAVEMENT MARKING PATTERNS 10 to 12" Type II-A-A ₹>` Type II-A-A Type Y bullons RAISED PAVENENT MARKERS - PATTERN A REFLECTORIZED PAVEMENT MARKINGS - PATTERN A -Type II-A-A 000'000000000 Type Y buttons -5 4 to 8" REFLECTORIZED PAVENENT MARKINGS - PATTERN B RAISED PAVEMENT MARKERS - PATTERN B Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized povement markings. CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS Type I-C Type W bultons ···· 00000 Type I-A Type Y buttons <u>o a o o o a o o o a o o o a o o o a o o o a o o o a o o o a o o o a o o o a o o o a o o o a o o o a o o o a o o a o o a o o a o o a o o a o o a o o a o o a o o a o o a o o a o o o a o o o a o a o o a o a o o a o a o o a o a o o a o a o o a o a o o a o a o o a o a o o a o a o o a o a o o a o a o o a o a o o a o</u> ₹〉 ➾ Type I-A Type Y buttons 00000 Type W bultons Type I-C or II-C-R REFLECTORIZED PAVEMENT MARKINGS RAISED PAVEMENT MARKERS Prefabricated markings may be substituted for reflectorized pavement markings. EDGE & LANE LINES FOR DIVIDED HIGHWAY Type I-C Type W buttons 00000 0000 Type II-A-A Type Y buttons ♦ ➪ 00000 00000 ➾ Type W buttons RAISED PAVEMENT MARKERS REFLECTORIZED PAVEMENT MARKINGS Prefabricated markings may be substituted for reflectorized pavement markings. LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS Type W bullons 00000 попоп попоп Hype Y ➪ 00000 00000 Type W bullons -Type I-C REFLECTORIZED PAVEMENT MARKINGS RAISED PAVEMENT MARKERS Prefabricated markings may be substituted for reflectorized povement markings. TWO-WAY LEFT TURN LANE

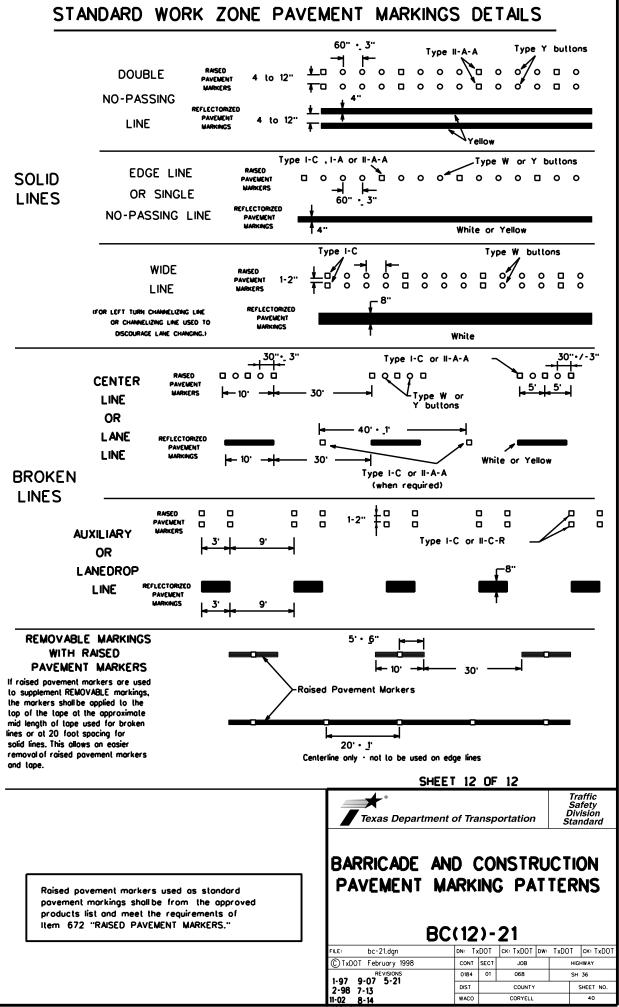

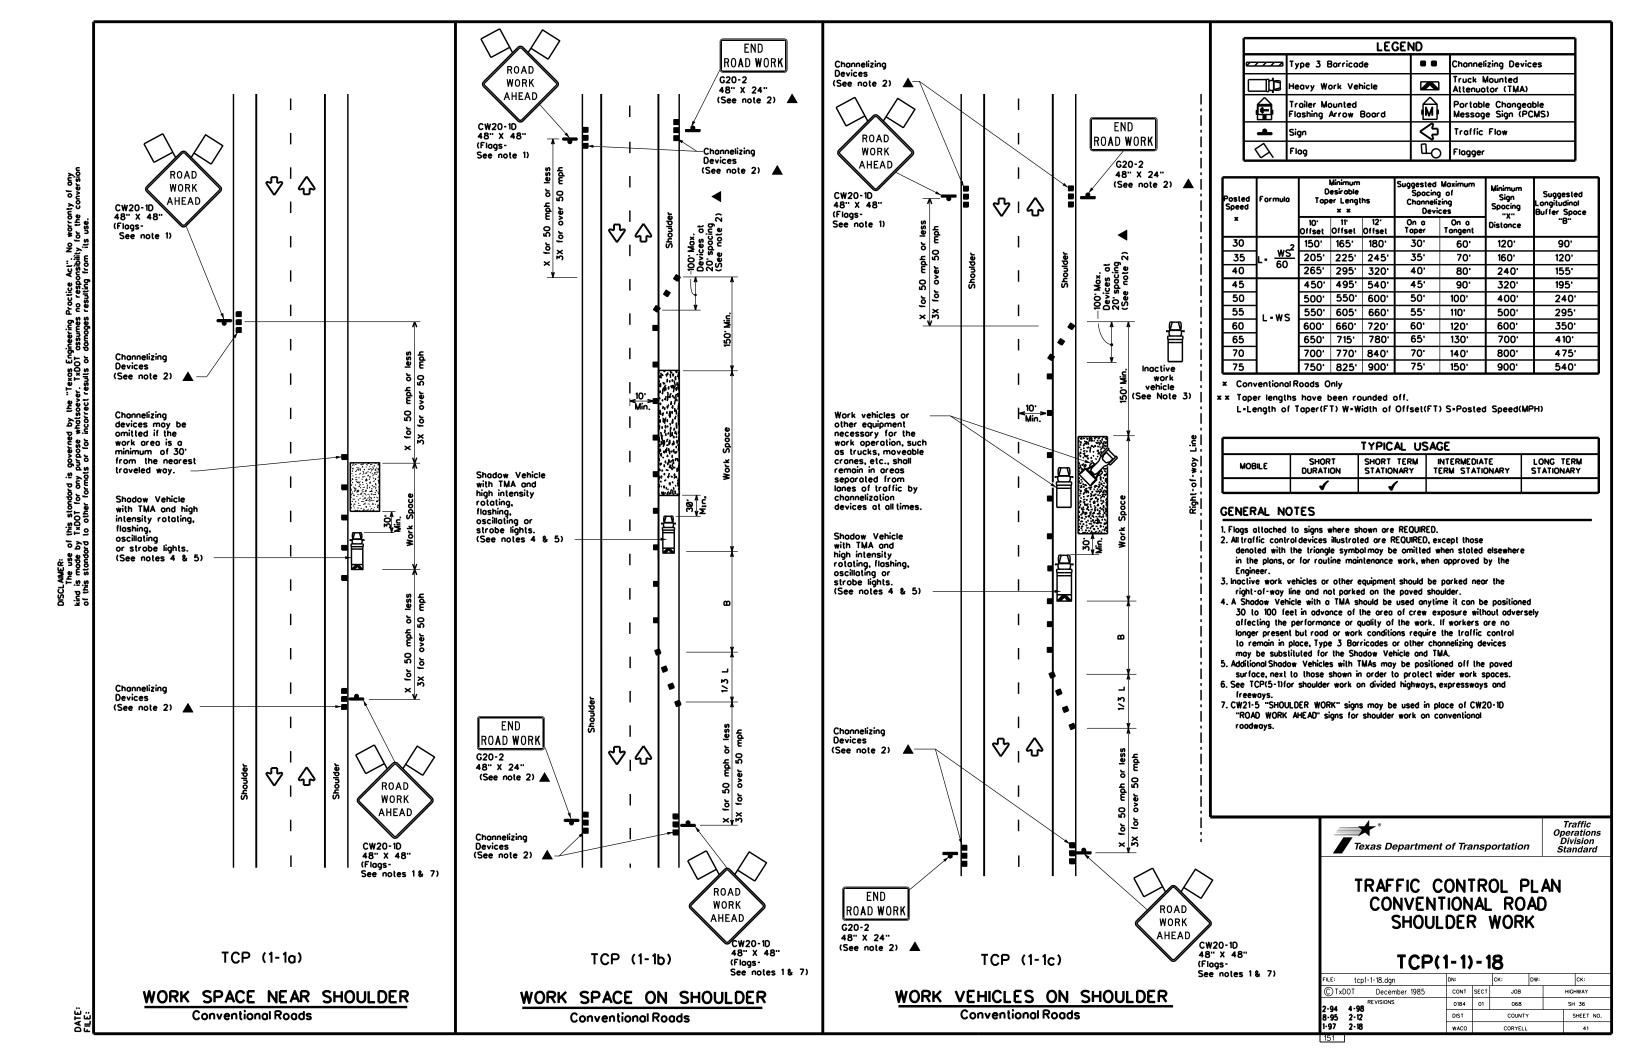

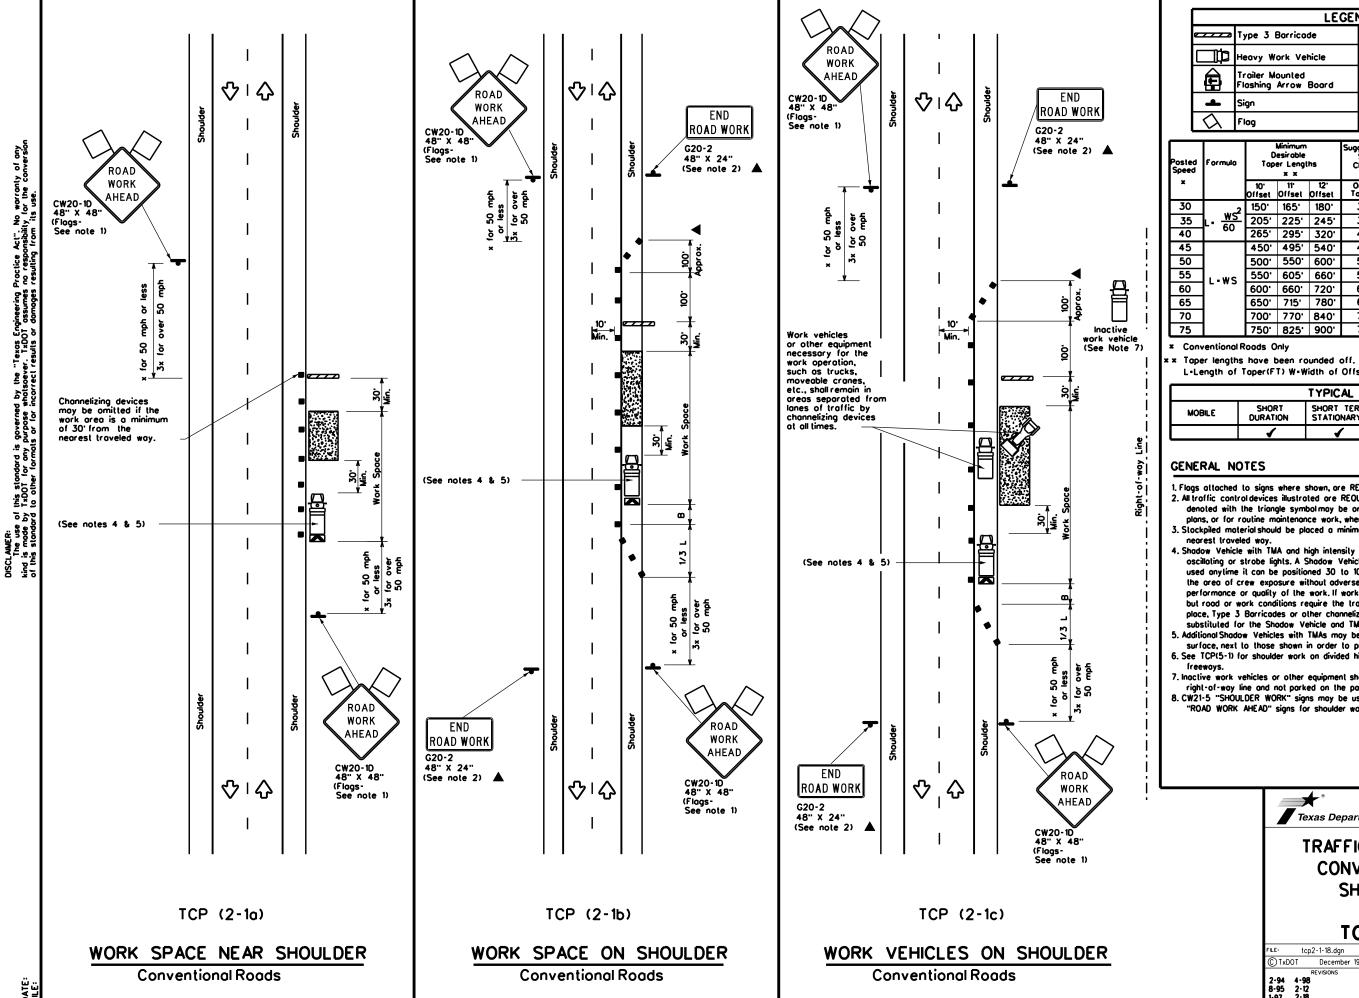

LEGEND Channelizing Devices Truck Mounted Attenuator (TMA) Heavy Work Vehicle Portable Changeable Message Sign (PCMS) Trailer Mounted Flashing Arrow Board **₹** Traffic Flow Ф Flagger

Posted Speed	Formula	0	Minimum esirable er Lengl x x		Suggested Spacino Channeli Devi	g of zing	Minimum Sign Spacing	Suggested Longitudinal Buffer Space
x		10° Offset	11 [.] Offset	12" Offset	On a Taper	On a Tangent	Distance	"8"
30	2	150 ⁻	165	180	30.	60.	120'	80 ,
35	L. <u>ws²</u>	205'	225'	245'	35'	70'	160'	120 ⁻
40	00	265 [.]	295	320'	40'	80.	240'	155'
45		450'	495'	540'	45'	90,	320'	195'
50		500	550.	600.	50.	100	400'	240 [.]
55	L-WS	550'	605'	660	55'	110'	500 [,]	295 [.]
60] - " 3	600·	660.	720	60'	120'	600 [,]	350 [.]
65		650	715	780'	65'	130'	700'	410'
70		700'	770'	840	70'	140'	800.	475'
75		750 [.]	825	900.	75'	150'	300 .	540'

- L-Length of Toper(FT) W-Width of Offset(FT) S-Posted Speed(MPH)

	TYPICAL USAGE							
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY				
	1	1	√	✓				

- 1. Flags attached to signs where shown, are REQUIRED.
- 2. All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the
- plans, or for routine maintenance work, when approved by the Engineer 3. Stockpiled material should be placed a minimum of 30 feet from
- nearest traveled way.

 Shodow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shodow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- 5. Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space. 6. See TCP(5-1) for shoulder work on divided highways, expressways and
- 7. Inactive work vehicles or other equipment should be parked near the
- right-of-way line and not parked on the paved shoulder.

 8. CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.

Texas Department of Transportation

Operations Division Standard

TRAFFIC CONTROL PLAN CONVENTIONAL ROAD SHOULDER WORK

TCP(2-1)-18

:	tcp2-1-18.dgn	DN:		CK:	DW:	CK:
TxDOT	December 1985	CONT	SECT	JOB		HIGHWAY
94 4	REVISIONS -98	0184	01	068		SH 36
	-90 -12	DIST		COUNTY		SHEET NO.
	-18	WACO		CORYELI		42

- 1. Prior to TxDOT allowing the Contractor to start construction, the Contractor will provide the required storm water and 404 permit documentation and support activities, including but not limited to the following:
 - Provide a list of all chemicals, construction and waste products that will be generated, stored or brought upon TxDOT ROW. The list includes expected construction debris, sanitary wastes, construction chemicals and petroleum products used or generated by the Contractor and sub-contractors. Along with the list, the Contractor will supply a spill prevention plan and clean up procedures that will include each of these chemical products or generated waste.
 - Provide in the construction schedule the necessary line items that will comply with the schedule and planning requirements of the storm water permit.
 - Post the TxDOT storm water permit and any Contractor permits, per permit requirements.
 - Provide copies of storm water permits for Contractor PSL(s). As new PSL(s) may be obtained for the project, provide copies of new or amended permits to TxDOT. The Contractor will not disturb soil without the proper permits.
 - Provide scale drawings of off ROW PSL's within one mile of the project, for field offices, borrow sources, plant sites or other uses.
 - Provide permit information on any Contractor batch plants or concrete crushing plants to be located at a Contractor PSL(s) within one mile of the project limits or boundaries. Copies of the air and water permits are to be provided to TxDOT before materials will be used on the project. No asphalt or concrete batch plants or concrete crushing plants will be located on TxDOT ROW.
 - Provide a letter indicating a Contractor Responsible Person for environmental compliance (CRP) for the project, and maintain a CRP throughout the project duration.
 - Provide all environmental documentation including certification of compliance and EMS training documents/certificates prior to starting work. The Contractor is to provide daily BMP inspection reports that document all field BMPs needing repair or replacement. The Contractor is to clearly document specific BMPs needing repair and location each work day.
 The Contractor is encouraged to be proactive in fixing BMPs without TxDOT direction.
 - Provide documentation required for Waters of the US, Note =3 and submittals for Item 496 bridge removal. Bridge removal methods submitted will follow all Waters of the US note requirements. The Contractor is not to start construction within the Ordinary High Water Warks of any stream until receiving approval for stream channel construction methods from T+DOT
 - Provide a written procedure for managing all chemicals and construction items placed in vertical containment structures. Also, provide methods to be used for the treatment, disposal, collection or release of storm water.
 - Provide on estimated date by letter, for the submittal of marked up bridge drawings, indicating cut locations for any structural steel requiring cutting or tarching of steel, coated with lead containing paints.
- 2. Place and maintain trash cans and portable sanitary facilities at locations where there is active construction. Worker generated trash and construction debris will be kept from being transported by storm water and will be collected daily from the ground and routinely hauled from the work area.
- 3. Contractor will provide TxDOT copies of all correspondence with MS4s, TCEO, EPA, DSHS and Corps of Engineers regarding activities on this project.
- 4. Contractor to conduct storm water inspections and develop SWPPP documents to support Contractor permits obtained for the project including PSL(s).
- 5. Contractor will maintain written documentation of locations of all portable sanitary facilities. The Contractor is required to document the location and disposition of all spills and cleanups from partable sanitary facilities.
- 6. Contractor will not store chemicals on TxDOT ROW, unless chemicals are stored following all environmental and safety regulations. Fuels for construction equipment will not be stored on TxDOT ROW.
- 7. The Contractor will store fuels and bulk chemicals on Contractor PSL(s) using a secondary containment method, such as double lined tanks and/or free standing containment reservoirs made of plastic or steel designed to hold bulk chemicals or drums.
- 8. The Contractor will not remove sediment controls without the prior approval of TxDOT, except for a sediment control that may back up water and cause safety or traffic problems.

SCALE - NTS SHEET 1 OF 10

Texas Department of Transportation

Waco District Standard

FOR
BEST MANAGEMENT
PRACTICES

FILE: BMPLAYOUTS.dgn	DN:		CK:	DW:	CK:
© TxDOT 2009	CONT	SECT	JOB	1	HIGHWAY
REVISIONS DEC 2013	0184	01	068	9	SH 36
FEB 2015	DIST		COUNTY		SHEET NO.
	WAC		CORYFI		43

- 9. Any sediment controls removed by the Contractor must be re-installed before the next rainfall event or by the end of day, as approved in advance.
- 10. Vegetative buffer strips may be used in place of temporary sediment controls such as sill fences and rock filler dams. The amount of disturbed soil area will be limited to 1/3 of an acre or less for a minimum of 50 feet of grassed ditch and 2/3 of an acre of disturbed soil for a minimum of 100 feet of grassed ditch.
- 11. Construction equipment found to be leaking oil, fuel or coolant will be immediately stopped, the leaking fluid collected and the equipment fixed. Equipment continuing to leak will be removed from the project of PSL.
- 12. Earth berms or mounds typically used to stockpile topsoil and used in place of boundary silt fence will be seeded upon being constructed. Long term use of earth berms or mounds will not be continued without establishing grass on the control.
- 13. The Contractor will inform TxDOT of new areas where soil will be disturbed to facilitate planning for new sediment controls. Areas of vegetated soil will not be disturbed by the Contractor, unless adequate sediment controls can be installed before the next rainfall event. The Contractor will assist TxDOT in keeping an accurate set of working SWPPP drawings that show the locations of all temporary sediment and erosion controls.
- 14. The Contractor will maintain an adequate amount of temporary sediment controls on hand at the field office or project staging area for critical SWPPP maintenance, including silt fence (minimum of 200 feet) and rock / fabric for rock filter dams (minimum for 100 feet of Type III dams).

The requirement for BMP rock quantities on hand is waived for small projects for on and off system bridge installations. The Contractor having a BMP Subcontractor does not eliminate the requirement for the Contractor to have the required sill fence and rock on hand, typically stored at the Contractor PSL.

- 15. Failure of a sub-contractor to complete storm water work on time will require the Contractor to start storm water sediment control work immediately and complete the work with high priority, or be subject to stop work on the entire project.
- 16. Earth materials on roads as a result of soil tracking will not be allowed to be transported off ROW in storm water. Soil or rock material found on roadways deposited from Contractor equipment will be removed daily.
- 17. Unless approved, completed concrete curb inlets will not be blocked by sediment controls. The controctor will frequently sweep the completed or partially completed roadway to keep sediment out of drainage pipes.
- 18. The Contractor will be responsible for proper dust control and will route construction traffic in a manner that minimizes dust generation.
- 19. Water for dust control will contain no pollutants, but may be non-potable from upland stock ponds. No quantity of water to be used for construction purposes may be taken from a 404 stream, prior to the proper authorizations or permits being obtained by the Contractor.
- 20. Contractor is to direct workers and sub-contractors to use portable sanitary facilities provided by the Contractor and not to trespass off ROW.
- 21. Contractor will provide written verification to TxDOT that earth borrow pits and disposal sources meet environmental and regulatory requirements, prior to use. Excavations will meet all OSHA requirements and the current safety guidelines established for TxDOT Quarries and Pits.
- 22. Boundary sill fences that are terminated down slope, with one end being at the lowest elevation, will be installed with an L hook to contain sediment. Boundary sill fences that are installed on flat ground will have L-hooks on both ends.
- 23. Rock filler dams across dilches will be constructed where the rock filler dam ends are embedded within the ditch side slopes and ditch bottom. The top center elevation of the rock filler dam will be at least 6 inches lower than the elevations on the rock filler dam ends.
- 24. Sill fence will be constructed in a U or V pattern across ditch lines and up the ditch side slope to keep storm water from flowing around the ends of the sill fence. Small sill fences that do not adequately span the ditch and allows storm water around the end(s) will not be used. Where there is adequate space, large U pattern sill fences are preferred to facilitate sediment collection and sediment removal with equipment.
- 25. Sediment controls (RFDs or silt fences) will be located along road ditches as marked on the SWPPP drawings. Modifications to the sediment control spacing will be adjusted during the project based on sediment control effectiveness. The installation and maintenance of sediment controls at or near outfalls, where storm water leaves TxDOT ROW, takes persistent over ditch line sediment controls.

SCALE - NTS SHEET 2 OF 10

Texas Department of Transportation

Waco District Standard

TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

-E: BMPLAYOUTS.dgn	DN:		ск:	DW:	CK:
TxDOT 2009	CONT	SECT	JOB	HIC	SHWAY
REVISIONS DEC 2013	0184	01	068	SH	1 36
EB 2015	DIST		COUNTY		SHEET NO.
	WAC		CORYEL	.L	44

- 26. Storm water draining sheet flow over disturbed soil sloped towards the ROW property line, will be intercepted by a boundary sill fence typically installed with L-shaped ends.
- 27. For ditch grading and shoulder up work, the Contractor is limited during good weather to remove up to one mile (limited to five acres of disturbed soil) of ditch line sediment controls on one side of the roadway. Outfall controls cannot be removed during this activity. Ditch line controls must be replaced upon completion of work and before the next rain event.
- 28. Sediment controls domaged by the Contractor, as defined by permit, must be fixed or replaced immediately upon discovery.
- 29. Notches in sill fences are not typically allowed. Specific sill fences that back up water onto lanes of traffic may be notched if approved.
- 30. For sill fence maintenance, the Contractor will leave approximately 4 inches of deposited sediment up stream of sill fences and not over excavate around silt fences or rock filter dams.
- 31. The Contractor will inform TxDOT of new construction areas and where soil is planned to be disturbed. Sediment controls will be installed at outfalls prior to the Contractor beginning soil disturbing activities up slope from the outfall.
- 32. Water from concrete saw cutting, concrete grinding and concrete coring activities; or fine materials from concrete chipping and salvage will not be allowed to enter storm drains or enter streams.
- 33. Storm water containing suspended sediment and turbidity needing to be removed from excavations or low areas will be pumped or gravity drained through vegetated buffer strips (50 foot minimum) or placed in ditches with temporary sediment controls, prior to the water being discharged into a stream.
- 34. Uncontaminated water from natural groundwater seepage, springs, foundations and drains that does not contain suspended sediment or any pollutants may be discharged without storm water controls.
- 35. Lime or cement if spilled in ditches or outside the defined limits of application is considered a pollutant and will be excavated and removed the same day, to avoid contaminating streams.
- 36. If located along the project ROW, RAP stockpiles will be located where there is a minimum 100 feet of vegetative buffer strip before storm water will reach a stream. RAP will not be used as a construction material within the Ordinary High Water Marks of a stream channel of a 404 designated stream.
- 37. If allowed on the project, concrete truck wash out areas will have adequate volume to allow 12 inch freeboard for rain and will be lined with 6 mils of plastic. No concrete will be stored higher than the 12 inch freeboard. Cleaning of truck chutes and equipment does not constitute concrete truck wash out and this activity may be completed at the concrete placement location. Wash out areas will not be located closer than 50 ft from down slope inlets or stream channels.
- 38. For outfalls near stack pands closer than 50 foot from disturbed soil at the ROW line, redundant sediment controls will be provided, typically a combination of rock filter dam and a silt fence constructed in line of the flow.
- 39. Earth stockpiles will utilize silt fence sediment controls, positioned on the low end of the stockpile drainage area with L-hooks or silt fence installed around the entire stockpile.
- 40. Sediment controls including rock filter dams and sill fences will not be installed across any 404 streams. Sediment controls at 404 streams will be positioned to limit sediment entering the stream from the banks and around structures/culverts, and will allow free flow of storm water to pass through the ROW without being dammed by any sediment controls. Remove loose materials from stream channels prior to each rain event.
- 41. Sediment controls for non-404 streams may be constructed across the drainage channel in unlimited locations. It is appropriate to use sediment control details typically used for 404 streams for non-404 streams when flow velocities are high. Remove loose material from stream channels prior to each rain event.
- 42. Incomplete drainage pipe installation across the roadway does not remove the requirement for having sediment controls around the ends of the pipe. To stay within permit requirements, sediment controls should be installed over and around the terminated end and along each side of the banks as soon as construction on the pipe has been completed. Remove loose material from stream channels prior to each rain event.
- 43. Safety end / headwall construction temporarily will require the removal of part of the sediment control placed over and around the pipe end. Retain in place as much functioning sediment control as possible. Replace the silt fence over and around the top of the pipe, immediately upon concrete placement and form removal. Do not remove culvert sediment controls that cannot be replaced before the next rain event. Sediment control at the ends of culverts must be in place and available for any rain event until the disturbed soil areas are re-vegetated.

SCALE - NTS SHEET 3 OF 10

Texas Department of Transportation

Waco District Standard

TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

LE: BMPLAYOUTS.dgn	DN:		CK:	DW:	CK:
ĈTxDOT 2009	CONT	SECT	JOB		HIGHWAY
REVISIONS DEC 2013	0184	01	068		SH 36
FEB 2015	DIST		COUNTY		SHEET NO.
	WAC		CORYEL	.L	45

- 44. Belween the Ordinary High Water Marks of a 404 stream channel, the Contractor will disturb only the minimum amount of stream channel that is necessary to complete the work.
- 45. Rock riprop for erosion control does not replace the requirements to maintain sediment control until vegetation is re-established. Replace sediment controls immediately after installing erosion rock.
- 46. At the direction of TxDOT, sediment deposited into existing and new culverts will be removed subsidiary to Item 506. Sediment to be removed is either pre-existing material before construction starts or sediment generated as a part of this project.
- 47. Provide treated 2X4 cross bracing for rectangular inlet silt fence, subsidiary to Item 506.
- 48. Loose or granular earth materials will not be used to repair silt fence undercuts. Silt fence undercut repairs will be conducted with well compacted soils or the silt fence will be reset in a nearby location.
- 49. Sill fence steel T posts of approximately 1.25 pounds per foot are allowed at a spacing of 8 feet or less. Sill fence steel T posts between approximately 1.25 pounds per foot and 0.85 pounds per foot are allowed for T post spacing of 5 feet or less.
- 50. Sill fence to be used to slow the flow of storm water down slopes will be positioned approximately horizontal (on the contour) with L hooks on the ends and limited to approximately 200 feet in length. Multiple sections and levels of sill fence may be required in addition to temporary / permanent erosion control flumes.
- 51. Soil retention blankets will be installed rolled down the slope with the small dimension side embedded at the top of slope, unless recommended otherwise by the manufacturer. Excess grass, rocks, trash, debris or clods will be removed before seeding and installing soil retention blankets. All installations will be by the manufacturer recommendations. Contractor equipment, including tractor mowers will be kept off areas with soil retention blankets until the grass is established.


SCALE - NTS SHEET 4 OF 10

Texas Department of Transportation


Waco District Standard

TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

FILE: BMPLAYOUTS.dgn	DN:		CK:	DW:	CK:
© TxDOT 2009	CONT	SECT	JOB	н	CHWAY
REVISIONS DEC 2013	0184	01	068	SI	⊣ 36
FEB 2015				SHEET NO.	
	WAC		CORYFI	1	46

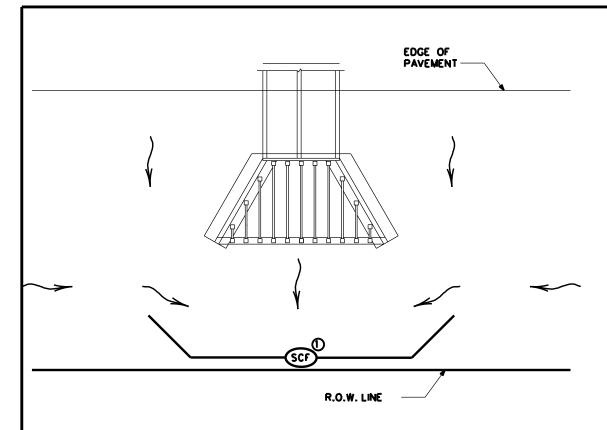


FOR NON-404 STREAMS ONLY ~ SEDIMENT CONTROL AT EXIT OF CULVERT

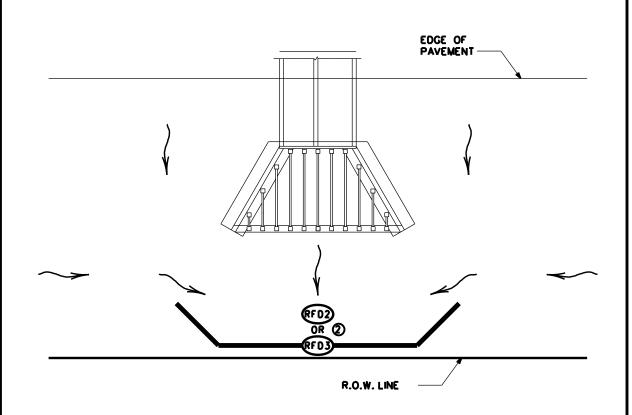


BEST MANAGEMENT PRACTICE (BMP) •2

FOR NON-404 STREAMS ONLY - SEDIMENT CONTROL AT EXIT OF CULVERT

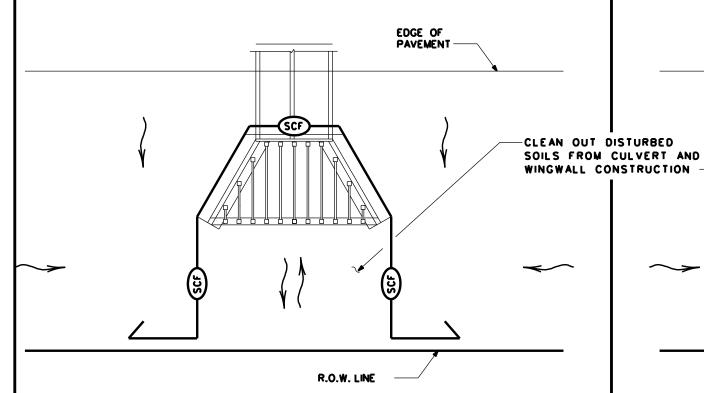

BEST MANAGEMENT PRACTICE (BMP) •3

FOR 404 OR NON-404 STREAMS ~ SEDIMENT CONTROL AT EXIT OR ENTRANCE OF CULVERT

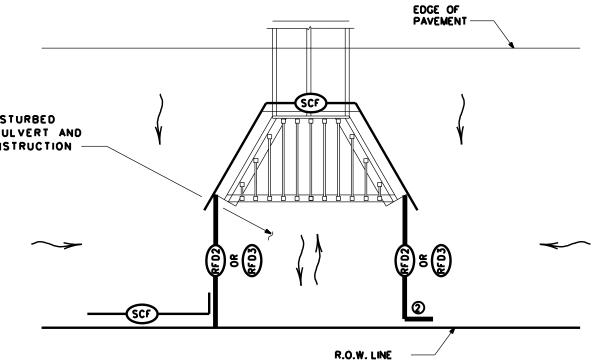

BEST MANAGEMENT PRACTICE (BMP) •4

FOR 404 OR NON-404 STREAMS - SEDIMENT CONTROL AT EXIT OR ENTRANCE OF CULVERT

—w—	SEDIMENT CONTROL FENCE
E F02	ROCK FILTER DAM (TY 2)
(1)	ROCK FILTER DAM (TY 3)
~	DIRECTION OF FLOW

NOTES

(DEXTEND SILT FENCE SO STORM WATER DOES NOT GO AROUND THE ENDS. USE L-HOOKS ON ENDS AS REQUIRED.


② EXTEND ROCK FILTER DAM SO STORM WATER DOES NOT GO AROUND THE ENDS.

SCALE - NTS SHEET 5 OF 10




TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

						-
FILE: BMPLAYOUTS.dgn	DN: TXDOT		ck: TXDOT	DW: TXD	OT	ck: TXDOT
© TxDOT 2009	CONT	SECT	JOB		HIGHWAY	
REVISIONS DEC 2013 FEB 2015	0184	01	068		SH	36
	DIST	COUNTY			SHEET NO.	
	WAC		CORYEL	.L		47

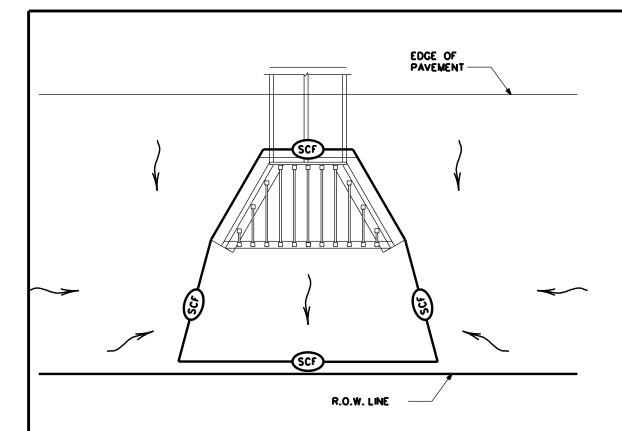


FOR NON-404 STREAMS ONLY - SEDIMENT CONTROL AT EXIT OF CULVERT

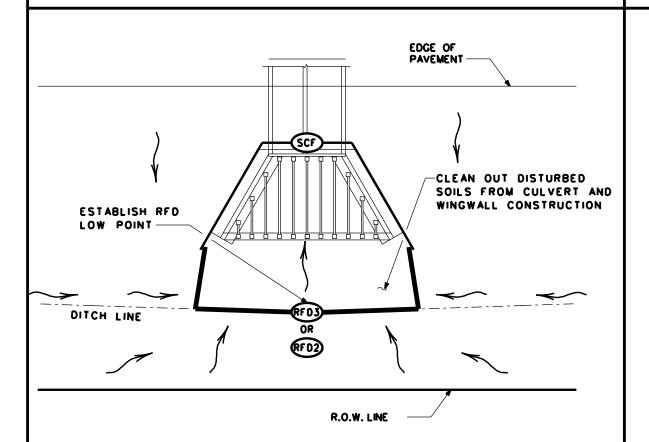


BEST MANAGEMENT PRACTICE (BMP) •7

FOR NON-404 STREAMS ONLY ~ SEDIMENT CONTROL AT ENTRANCE OF CULVERT

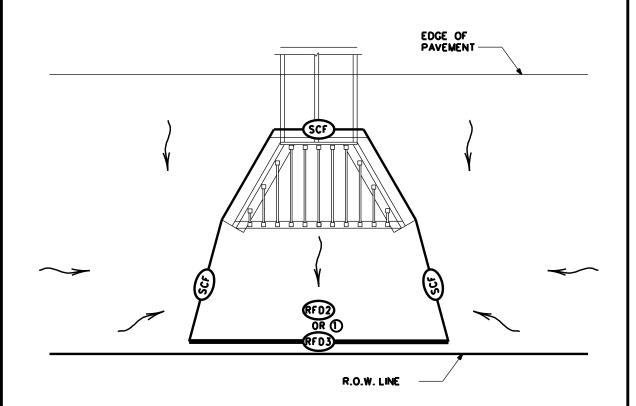

BEST MANAGEMENT PRACTICE (BMP) •6

FOR NON-404 STREAMS ONLY ~ SEDIMENT CONTROL AT EXIT OF CULVERT

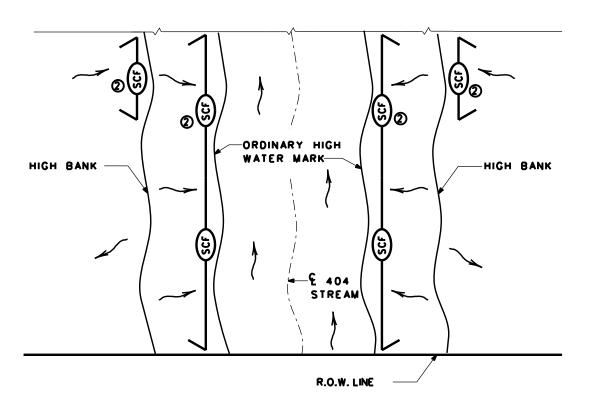

BEST MANAGEMENT PRACTICE (BMP) *8

FOR 404 STREAMS - SEDIMENT CONTROL DURING PROJECT CLEARING AND GRUBBING

—(13)	SEDIMENT CONTROL FENCE
₹ 02	ROCK FILTER DAM (TY 2)
(1)	ROCK FILTER DAM (TY 3)
~	DIRECTION OF FLOW

NOTES

1) PROVIDE OVERLAP OF SILT FENCE WITH ROCK FILTER DAM.


2 USE SILT FENCE L-HOOKS ON ENDS TO BLOCK STORM WATER SEDIMENT

SCALE - NTS SHEET 6 OF 10




TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

: BMPLAYOUTS.dgn	DN: TXDOT		ck: TXDOT	DW:	TXDOT	ck: TXDOT
TxDOT 2009	CONT	SECT	JOB		HIGH	YAW
REVISIONS C 2013	0184	01	068	SH	SH 36	
B 2015	DIST		COUNTY	SHEET NO.		
	WAC		CORYEL	L		48

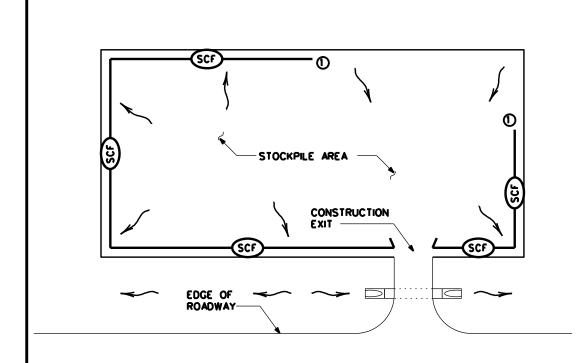


STOCKPILE SEDIMENT CONTROL

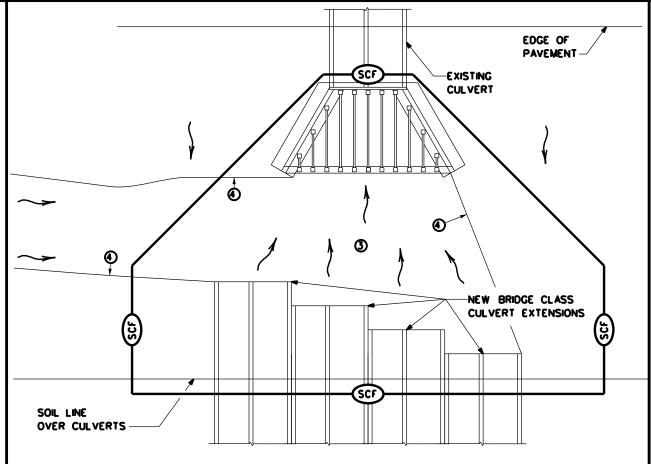


BEST MANAGEMENT PRACTICE (BMP) •10

FOR 404 OR NON-404 STREAMS ONLY ~
SEDIMENT CONTROL AT PHASED CONSTRUCTION OF BRIDGE CLASS CULVERTS

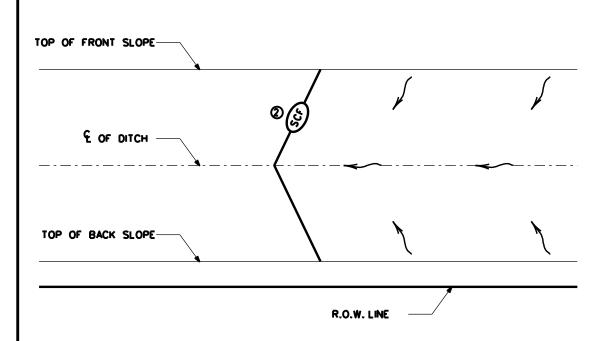

BEST MANAGEMENT PRACTICE (BMP) •11

BOUNDRY SEDIMENT CONTROL - BOTH ENDS OF CONTROL TERMINATED UP SLOPE

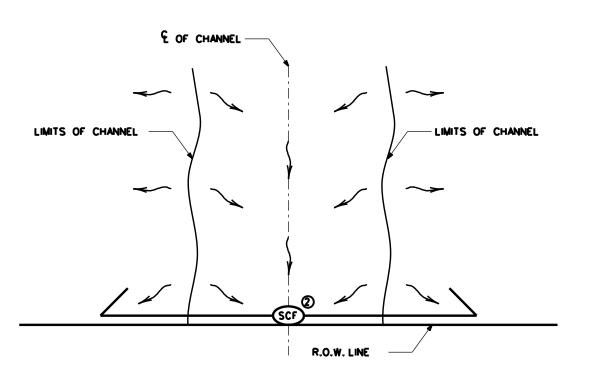

BEST MANAGEMENT PRACTICE (BMP) •12

BOUNDRY SEDIMENT CONTROL - BOTH ENDS OF CONTROL TERMINATED DOWN SLOPE

—(35)	SEDIMENT CONTROL FENCE
(G)	ROCK FILTER DAM (TY 2)
	ROCK FILTER DAM (TY 3)
\	DIRECTION OF FLOW

NOTES:


- ()START SEDIMENT CONTROL AT LOCATION SO ALL STORM WATER WITH SEDIMENT IS COLLECTED
- ② ROCK FILTER DAMS OR EARTH/GRASSED EMBANKMENTS CAN BE SUBSTITUTED AS DIRECTED.
- ③ PROVIDE A SMOOTH TRANSITION FROM THE INVERT ELEVATIONS BETWEEN CULVERTS. REMOVE LOOSE SOIL FROM EXCAVATED AREA BETWEEN CULVERTS.
- (4) PROVIDE AND INSTALL PNEUMATICALLY PLACED CONCRETE ON THE DITCH BOTTOM AND SIDE SLOPES BETWEEN TEMPORARY TERMINATIONS BETWEEN OLD AND NEW CULVERTS. PNEUMATICALLY PLACED CONCRETE WILL BE PLACED TO THE HEIGHT OF THE LARGEST CULVERT ON THE DITCH SIDE SLOPES; AND TO A LIMIT TO FEET OUTSIDE THE LOCATION OF BMPS ALONG THE DITCH BOTTOM, CEMENT STABILIZED SAND MAY BE SUBSTITUTED FOR PNEUMATICALLY PLACED CONCRETE, IN AREAS WHERE INSTALLATION WORKS AND AT THE OPTION OF TXDOT.


SCALE • NTS SHEET 7 OF 10





TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

FILE: BMPLAYOUTS.dgn	DN: TXDOT		ck: TXDOT	DW:	TXDOT	ck: TXDOT
© TxDOT 2009	CONT	SECT	JOB		HIGHWAY	
REVISIONS DEC 2013	0184	01	068		SH	36
FEB 2015	DIST	COUNTY		SHEET NO.		
	WAC		CORYFI	ī		49

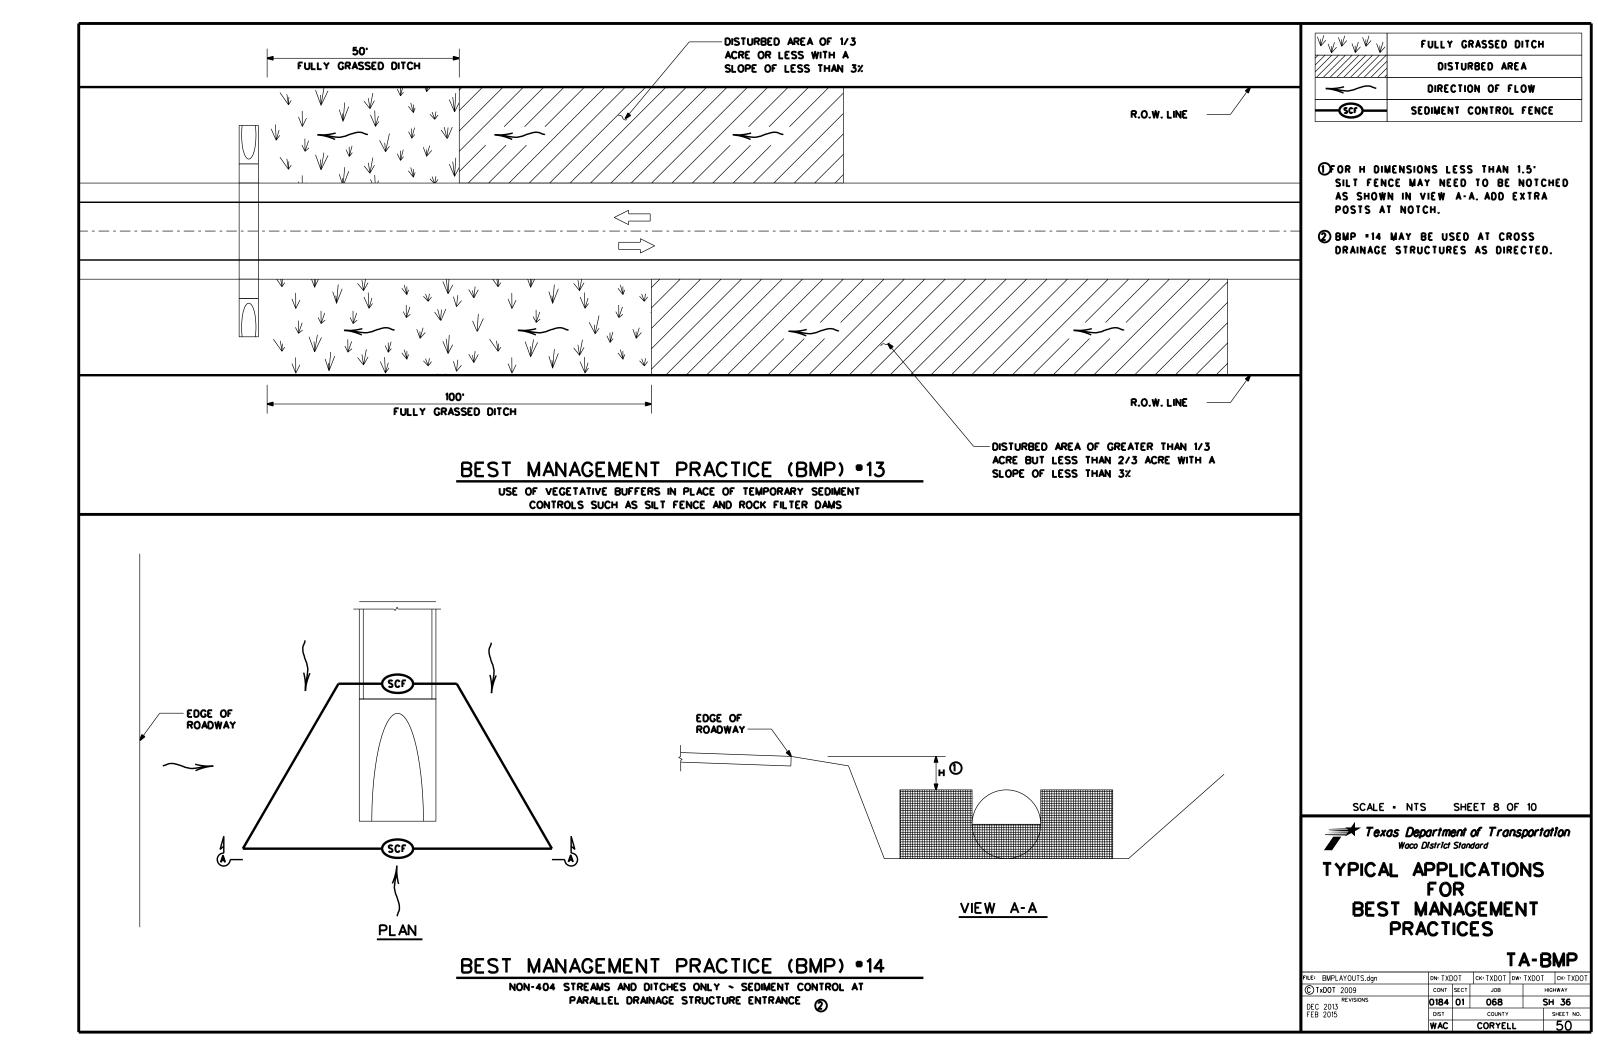


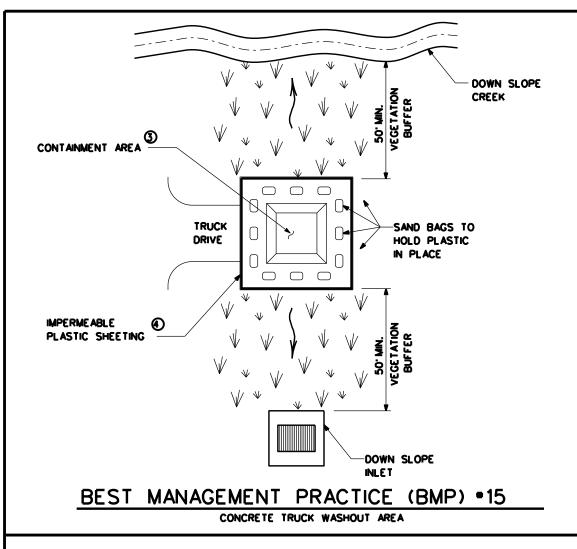

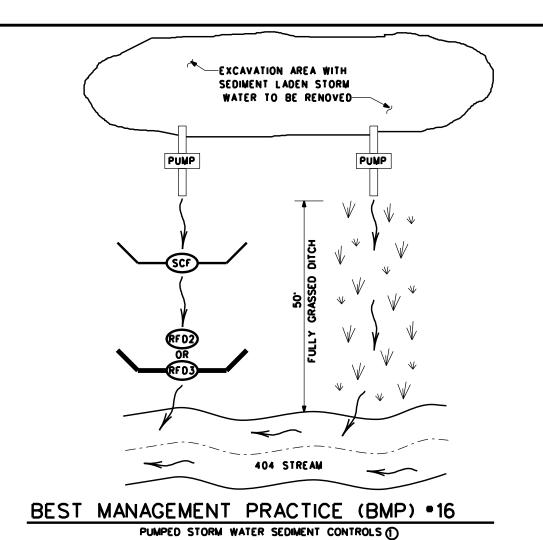


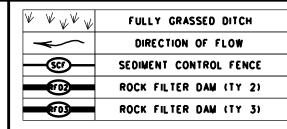

- ()PUMPED STROM WATER FROM AN EXCAVATION AREA SHOULD BE DISCHARGED IN A 50' VEGETATIVE BARRIER OR THROUGH TWO TEMPORARY SEDIMENT CONTROLS BEFORE ENTERING A 404 STREAM.
- ② FOR LANDOWNER STOCKPONDS WITHIN 50' OF THE RIGHT OF WAY LINE, PROVIDE REDUNDANT SEDIMENT CONTROLS AT THE CONVEYANCE OF THE POND. MINIMUM OF TWO SEDIMENT CONTROLS.
- (3) WHEN CONTAINMENT AREA REACHES 1' FREEBOARD, DISCONTINUE WASHOUT PLACEMENT AND REMOVE MATERIAL UPON SOLIDIFICATION.

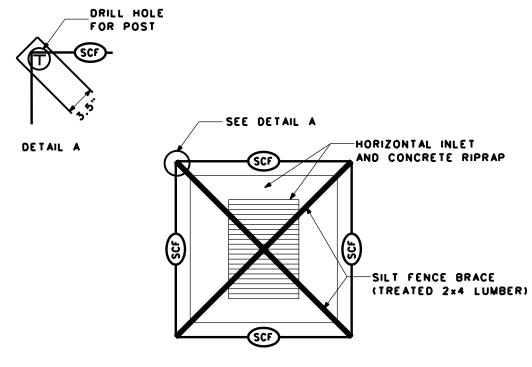

HORIZONTAL INLET SEDIMENT CONTROL

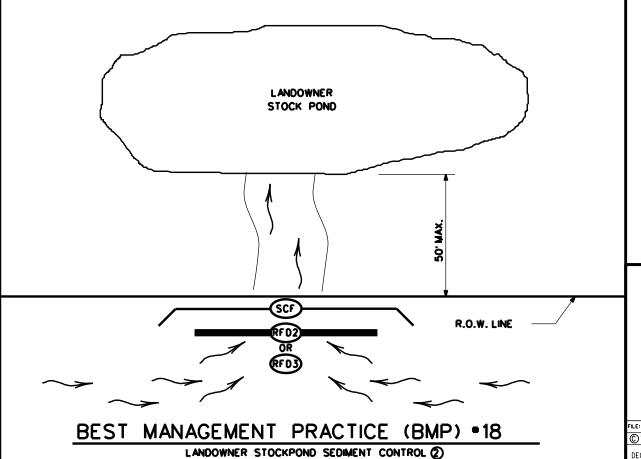


SCALE - NTS SHEET 9 OF 10

Texas Department of Transportation
Waco District Standard

TYPICAL APPLICATIONS


TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

: BMPLAYOUTS.dgn	DN: TXDOT		ck: TXDOT	DW:	TXDOT	ck: TXDOT
TxDOT 2009	CONT	SECT	JOB		HIGHWAY	
REVISIONS C 2013	0184	01	068		SH	36
B 2015	DIST		COUNTY		S	HEET NO.
	WAC		CORYEL	.L		51

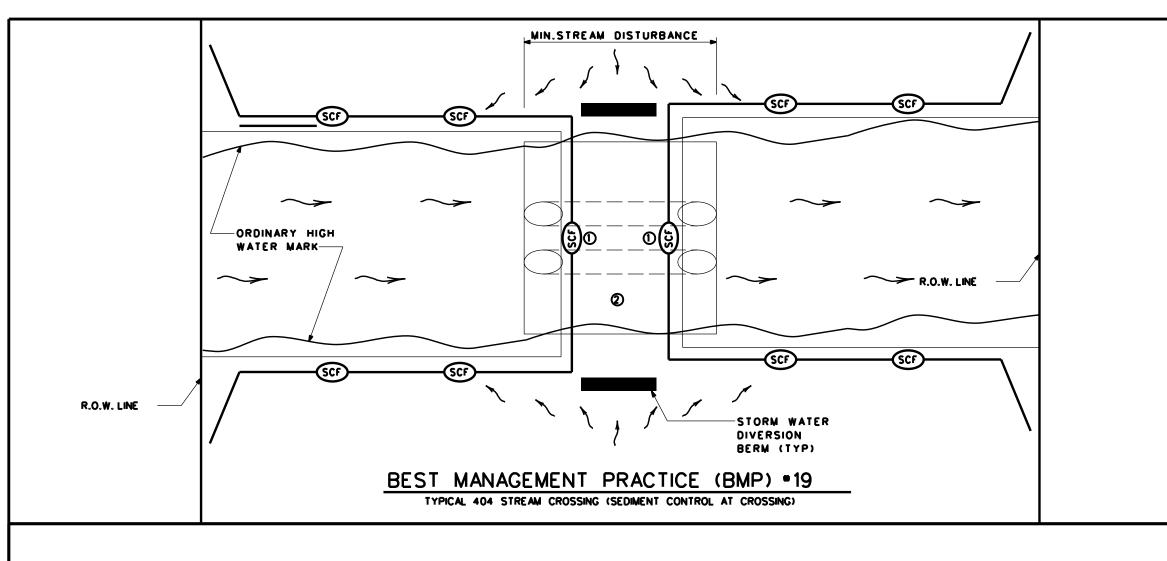

	DIRECTION OF FLOW
	SEDIMENT CONTROL FENCE
RFD-	ROCK FILTER DAM
	SECURITY FENCING

- (1) HAY BALES MAY BE SUBSTITUTED FOR SILT FENCE OVER THE STREAM CROSSING.
- ② CROSSING WILL BE AS PER REQUIREMENTS OF THE WATERS OF THE US GENERAL NOTES.
- (3) INSTALL SILT FENCE SLIGHTLY UP FROM OHW MARK FROM R.O.W. TO R.O.W.
- WISE SILT FENCE L-HOOKS ON LEVEL OR DOWN SLOPING ENDS TO BLOCK STORM WATER SEDIMENT
- (5) INSTALL LARGE V OR U SHAPED BMP'S FROM ABUTMENT AS SHOWN, IF THERE IS STEEP DITCH CONDITIONS DECREASE SPACING AND CONSIDER RFD'S, ADD ADDITIONAL BMP'S IF GRADE IS STEEP OR IF FLOW IS HIGH.

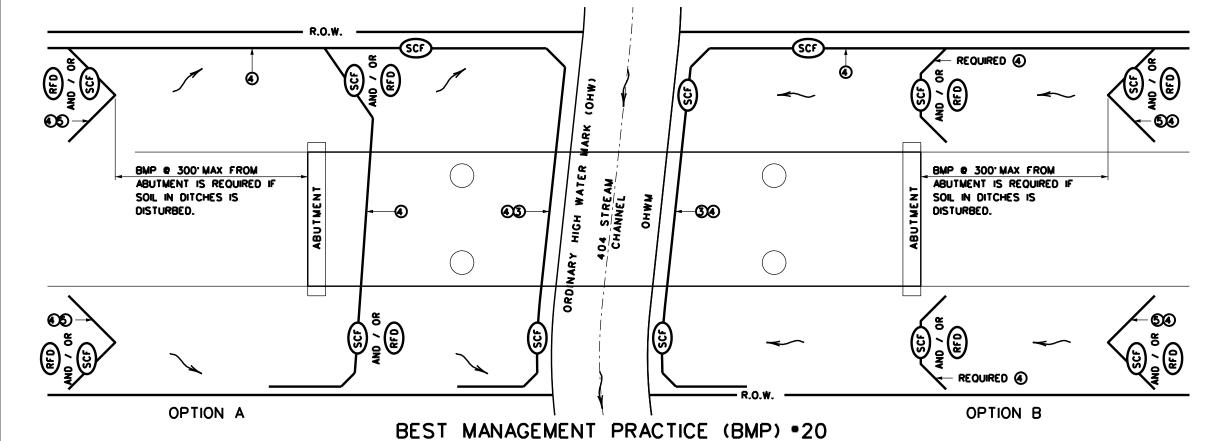

FOR 404 STREAMS ~ BMP'S AT BRIDGES

SCALE - NTS SHEET 10 OF 10

Texas Department of Transportation


Waco District Standard

TYPICAL APPLICATIONS
FOR
BEST MANAGEMENT
PRACTICES

FILE: BMPLAYOUTS.dgn	DN: TXD	OT	ck: TXDOT	DW:	TXDOT	ck: TXDOT
© TxDOT 2009	CONT	SECT	JOB		HIG	HWAY
REVISIONS DEC 2013	0184	01	068	8 SH 36		36
FEB 2015	DIST	COUNTY			SHEET NO.	
	WAC		CORYEL	.L		52

Connect the ends of the successive reinforcement sheets or rolls a minimum of 6 times with hog rings.

Galvanized welded wire mesh (W.W.M.) (12.5 GA, SWG Min.) with a maximum opening size of 2"x 4"or Woven Mesh (W.M.)(See woven mesh option detail)

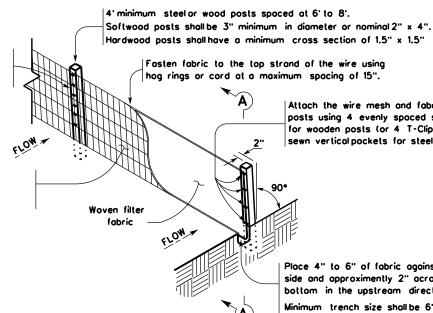


Attach the wire mesh and fabric on end posts using 4 evenly spaced staples for wooden posts (or 4 T-Clips or sewn vertical pockets for steel posts).

Place 4" to 6" of fabric against the trench side and approximently 2" across the trench bottom in the upstream direction.

Minimum trench size shall be 6" square. Backfill and hand tamp.

TEMPORARY SEDIMENT CONTROL FENCE



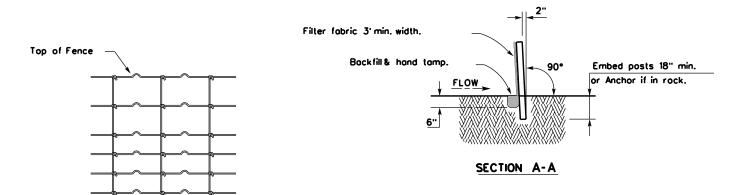

HINGE JOINT KNOT WOVEN MESH (OPTION) DETAIL

Galvanized hinge joint knot woven mesh (12.5 GA.SWG Min.) requires a minimum of five horizontal wires spaced at a maximum of 12 inches apart and all vertical wires spaced at a maximum of 12 inches apart.

SEDIMENT CONTROL FENCE USAGE GUIDELINES

A sediment control fence may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A 2 year storm frequency may be used to calculate the flow rate to be filtered.

Sediment control fence should be sized to filter a maximum flow through rate of 100 GPM/FT. Sediment control fence is not recommended to control erosion from a drainage area larger than 2 acres.


LEGEND

Sediment Control Fence



GENERAL NOTES

- 1. Vertical tracking is required on projects where soil distributing activities have occurred unless otherwise opproved.
- 2. Perform vertical tracking on slopes to temporarily stabilize soil.
- 3. Provide equipment with a track undercarriage copable of producing linear soil impressions measuring a minimum of 12" in length by 2" to 4" in width by 1/2" to 2" in depth.
- 4. Do not exceed 12" between track impressions.
- 5. Install continous linear track impressions where the minimum 12" length impressions are perpendicular to the slope or direction of water flow.

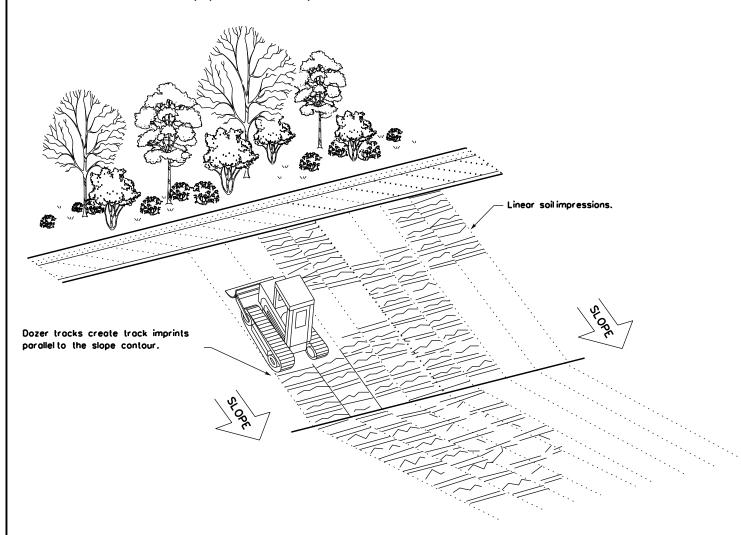


VERTICAL TRACKING



TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES FENCE & VERTICAL TRACKING

EC(1)-16

FILE: ec116	DN: TxDOT		ск: КМ	ow: VP	DN/CK: LS
© TxDOT: JULY 2016	CONT	SECT	JOB		HIGHWAY
REVISIONS	0184	01	068		SH 36
	DIST	ST COUNTY SHEE			SHEET NO.
	WACO		CORYELL		53

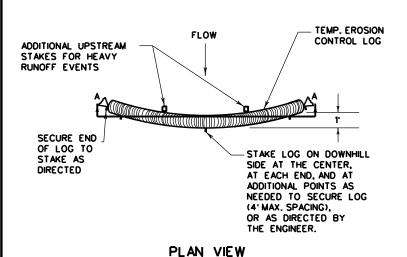

TEMP. EROSION

CONTROL LOG

1' (TYP.)


COMPOST CRADLE

UNDER EROSION


CONTROL LOG


FLOW ADDITIONAL UPSTREAM STAKES FOR HEAVY RUNOFF EVENTS SECURE END OF LOG TO R.O.W. STAKE AS DISTURBED AREA DIRECTED BACK OF CURB -LIP OF GUTTER STAKE ON DOWNHILL SIDE OF TEMP. EROSION LOG AT 8' (ON CENTER) MAX. CONTROL LOG AS NEEDED TO SECURE LOG, OR AS DIRECTED BY THE ENGINEER.

PLAN VIEW

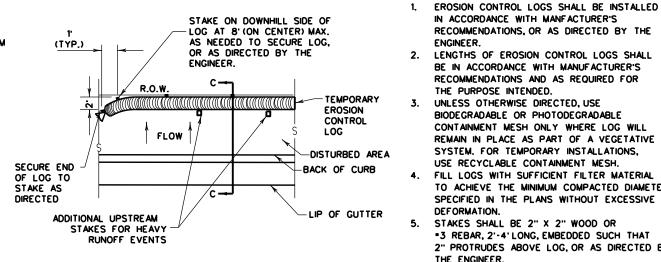


PLAN VIEW

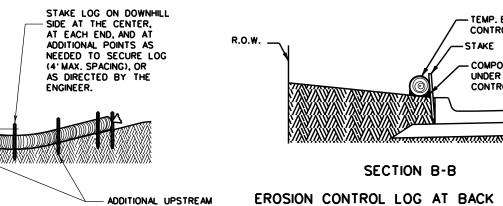

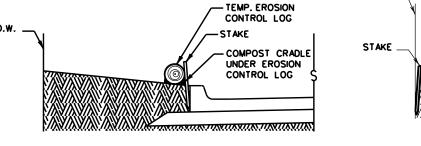

EROSION CONTROL LOG AT BACK OF CURB CL-BOC

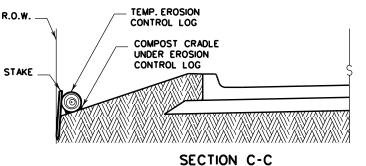

EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY



MINIMUM COMPACTED DIAMETER MINIMUM COMPACTED DIAMETER

GENERAL NOTES:

RECOMMENDATIONS, OR AS DIRECTED BY THE

LENGTHS OF EROSION CONTROL LOGS SHALL

BE IN ACCORDANCE WITH MANUFACTURER'S

RECOMMENDATIONS AND AS REQUIRED FOR

CONTAINMENT MESH ONLY WHERE LOG WILL

REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS.

FILL LOGS WITH SUFFICIENT FILTER MATERIAL

SPECIFIED IN THE PLANS WITHOUT EXCESSIVE

*3 REBAR, 2'-4'LONG, EMBEDDED SUCH THAT

2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY

DO NOT PLACE STAKES THROUGH CONTAINMENT

SANDBAGS USED AS ANCHORS SHALL BE PLACED

TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE

TO PREVENT RUNOFF FROM FLOWING AROUND THE

UPSTREAM STAKES MAY BE NECESSARY TO KEEP

ON TOP OF LOGS & SHALL BE OF SUFFICIENT

COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.

TO ACHIEVE THE MINIMUM COMPACTED DIAMETER

UNLESS OTHERWISE DIRECTED, USE

BIODEGRADABLE OR PHOTODEGRADABLE

USE RECYCLABLE CONTAINMENT MESH.

STAKES SHALL BE 2" X 2" WOOD OR

SIZE TO HOLD LOGS IN PLACE.

10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL

LOG FROM FOLDING IN ON ITSELF.

IN ACCORDANCE WITH MANFACTURER'S

ENGINEER.


DEFORMATION.

THE ENGINEER.

THE PURPOSE INTENDED.

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS


SHEET 1 OF 3



TEMPORARY EROSION. SEDIMENT AND WATER POLLUTION CONTROL MEASURES **EROSION CONTROL LOG**

EC(9)-16

DN: TxDOT CK: KM DW: LS/PT CK: LS ILE: ec916 CONT SECT TxDOT: JULY 2016 JOB HIGHWAY 0184 01 068 SH 36 DIST COUNTY SHEET NO. WACO CORYFLL 54

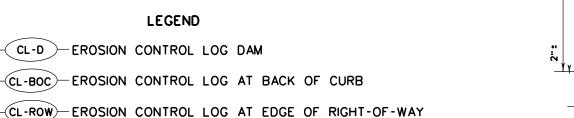

STAKES FOR HEAVY

RUNOFF EVENTS

EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING -(CL-SST

SECTION A-A

EROSION CONTROL LOG DAM


CL-D

EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING -(CL-SSL

(CL-DI -EROSION CONTROL LOG AT DROP INLET

(CL-CI EROSION CONTROL LOG AT CURB INLET

CL-GI -EROSION CONTROL LOG AT CURB & GRATE INLET



REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion controllog sediment trop may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 ocres. The trop copocity should be 1800 CF/Acre (0.5" over the drainage area).


Controllogs should be placed in the following locations:

- 1. Within drainage ditches spaced as needed or min. 500' on center
- 2. Immediately preceding ditch inlets or drain inlets 3. Just before the drainage enters a water course
- 4. Just before the drainage leaves the right of way 5. Just before the drainage leaves the construction
- limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.




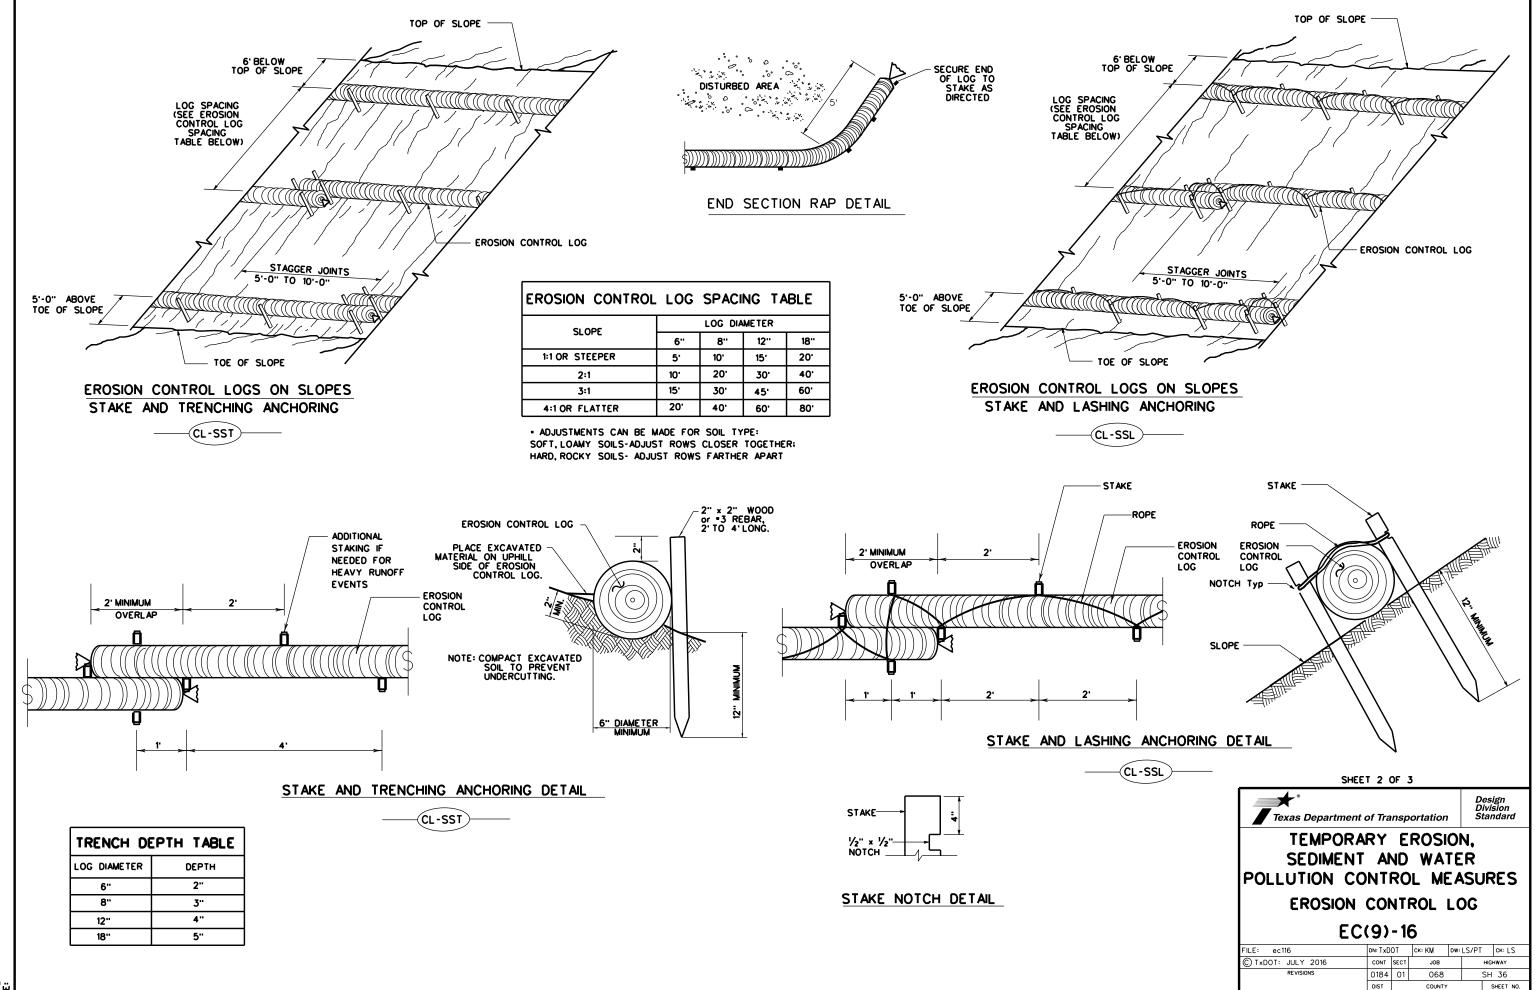


55

WACO

CORYELL

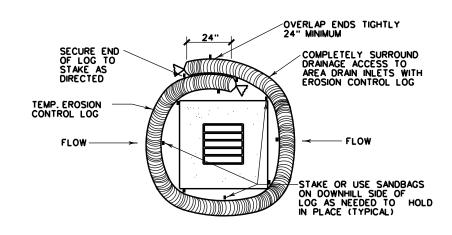

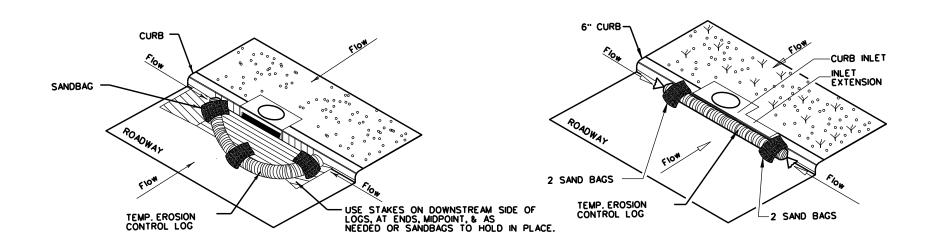

EROSION CONTROL LOG AT DROP INLET

_____(CL-DI)_____

EROSION CONTROL LOG AT CURB INLET

(CL-CI)----

EROSION CONTROL LOG AT CURB INLET


CL-CI

Z FT CURB AND GRATE INLET TEMPORARY EROSION CONTROL LOG USE STAKES ON DOWNSTREAM SIDE OF LOGS, AT ENDS, MIDPOINT, & AS NEEDED OR SANDBAGS TO HOLD IN PLACE.

EROSION CONTROL LOG AT CURB & GRADE INLET

_____(CL-GI)____

EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

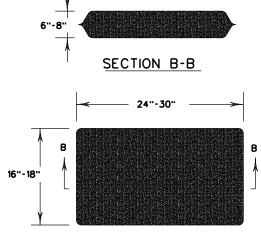

SANDBAG DETAIL

SHEET 3 OF 3




SEDIMENT AND WATER
POLLUTION CONTROL MEASURES
EROSION CONTROL LOG

EC(9)-16

FILE: ec916	DN: TxD	ОТ	CK: KM DW: LS		LS/PT CK: LS			
© TxDOT: JULY 2016	CONT	SECT	JOB			HIGHWAY		
REVISIONS	0184	01	068			36		
	DIST		COUNTY			SHEET NO.		
	WACO		CORYELL			56		

STORM WATER POLLUTION

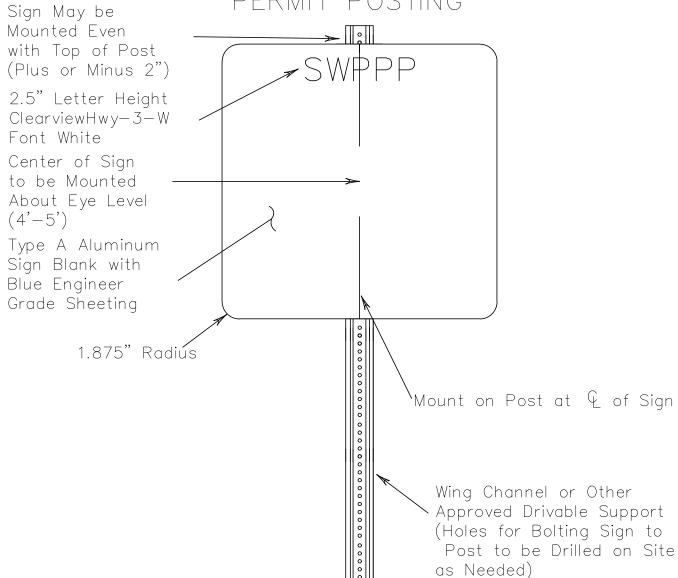

No Permanent Installation Allowed. Sign to be Removed After Project Completion.

SW3P SIGN

TxDOT & Contractor Construction Site Note

GENERAL NOTES:

- 1. The alphabets and lateral spacing between letters and numerals shall conform with the "Texas Manual on Uniform Traffic Control Devices for Streets and Highways", (TMUTCD) latest edition, and the "Compliant Work Zone Traffic Control Devices List". Lateral spacing of text shall provide a balanced appearance. All materials shall conform to Department Specifications.
- 2. Background shall be reflective sheeting Type C.
- 3. CSN Sheets will be laminated and attached to the sign with an adhesive. Ensure sheets remain dry.(See Figure 1).
- 4. SW3P Signs should be placed just inside the ROW line at the project limits at a readable height. It may be placed perpendicular or parallel to ROW line. If the sign cannot be placed outside the clear zone, it will be mounted per TMUTCD requirements.
- 5. Final location of the signs will be as approved by the
- 6. The sign will be removed upon completion of the project.

DEPARTMENT MATERIAL SPECIFICATIONS

FLAT SURFACE REFLECTIVE SHEETING VINYL NON-REFLECTIVE DECAL SHEETING DMS-8300 DMS-8320

REFLECTIVE SHEETING OR COLOR USAGE

BLUE BACKGROUND TYPE C (FLUORESCENT PRISMATIC) WHITE LEGEND VINYL NON-REFLECTIVE DECAL SHEETING

★Texas Department of Transportation

SW3P SIGN SHEET

FILE:	DN: TxDOT	CK:	DW:		CK:	CK:	
©TxD0T 2016	DISTRICT	FEDERAL AID PROJECT			SHEET		
REVISION DATE: 10-16-15	6	(SEE TITLE SHEET)				57	
	COUNTY		CONTROL	SECT	JOB	HIGHWAY	
	WACO		0184	01	068	SH 36	