

INDEX OF SHEETS


SHEET NO	DESCRIPTION
GENERAL	
1	TITLE SHEET
2 - 9	PROJECT MAP
10	RAILROAD LOCATION MAPS
11,11A - 11D	GENERAL NOTES AND SPECIFICATION DATA
12,12A - 12D	ESTIMATE & QUANTITY
13	SEAL COAT MATERIAL SELECTION TABLE
14 - 23	CONSOLIDATED SUMMARIES
24 - 25	RAILROAD REQUIREMENTS FOR NON-BRIDGE CONSTRUCTION PROJECTS
26 - 28	RAILROAD SCOPE OF WORK
STANDARD SHEETS BELOW	
29 - 40	* BC(1) - 21 THRU BC(12) - 21
41	* TCP(3-1)-13
42	* TCP(3-3)-14
43 - 49	* TCP(SC-1)-22 THRU TCP(SC-7)-22
50 - 53	* PM(1)-22 THRU PM(3)-22, PM(4)-22
54 - 55	* TS2(PL-1)-23 THRU TS2(PL-2)-23
56 - 57	* RCD(1)-22 THRU RCD(2)-22
58	* RS(5)-23
59	* WZ(RS)-22
60	* EC(1)-16
61	EPIC

In Case of Railroad Emergency
Call Union Pacific Railroad (UPRR)
at 888-877-7267
Locations DOT 416 027 L
RRMP: 206,690

And at 800-848-8715
Locations DOT 448 426 L
RRMP: 136,210

BNSF at 800-333-2383
Locations DOT 023 056 J
RRMP: 239,980

THE STANDARD SHEET SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY DIRECT SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.



Brian W. Lamb, P.E.
SIGNATURE OF REGISTRANT & DATE 7/5/2023

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, WILL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS FOR ALL FEDERAL - AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, JULY 2022).

STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION


PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT

FEDERAL AID PROJECT:

BELL COUNTY - 2303-02-010, 2504-01-008, 2602-02-013, 1656-01-014
BOSQUE COUNTY - 0833-02-021, 2871-02-008
CORYELL COUNTY - 0833-01-009, 2138-01-014, 2871-01-016
FALLS COUNTY - 1656-02-017, 1078-01-009, 2634-01-019
HAMILTON COUNTY - 0550-08-014, 0774-05-015
HILL COUNTY - 0834-02-030, 0834-03-026, 0888-01-022, 2305-02-018
LIMSTONE COUNTY - 1458-02-011, 0831-02-022, 0673-01-023, 3079-02-005
MCLENNAN COUNTY - 2674-02-012, 1187-02-019

FOR THE CONSTRUCTION OF SEAL COAT TYPE WORK
CONSISTING OF SEAL COAT

TOTAL LENGTH 804,286.56 FT
152.327 MILES

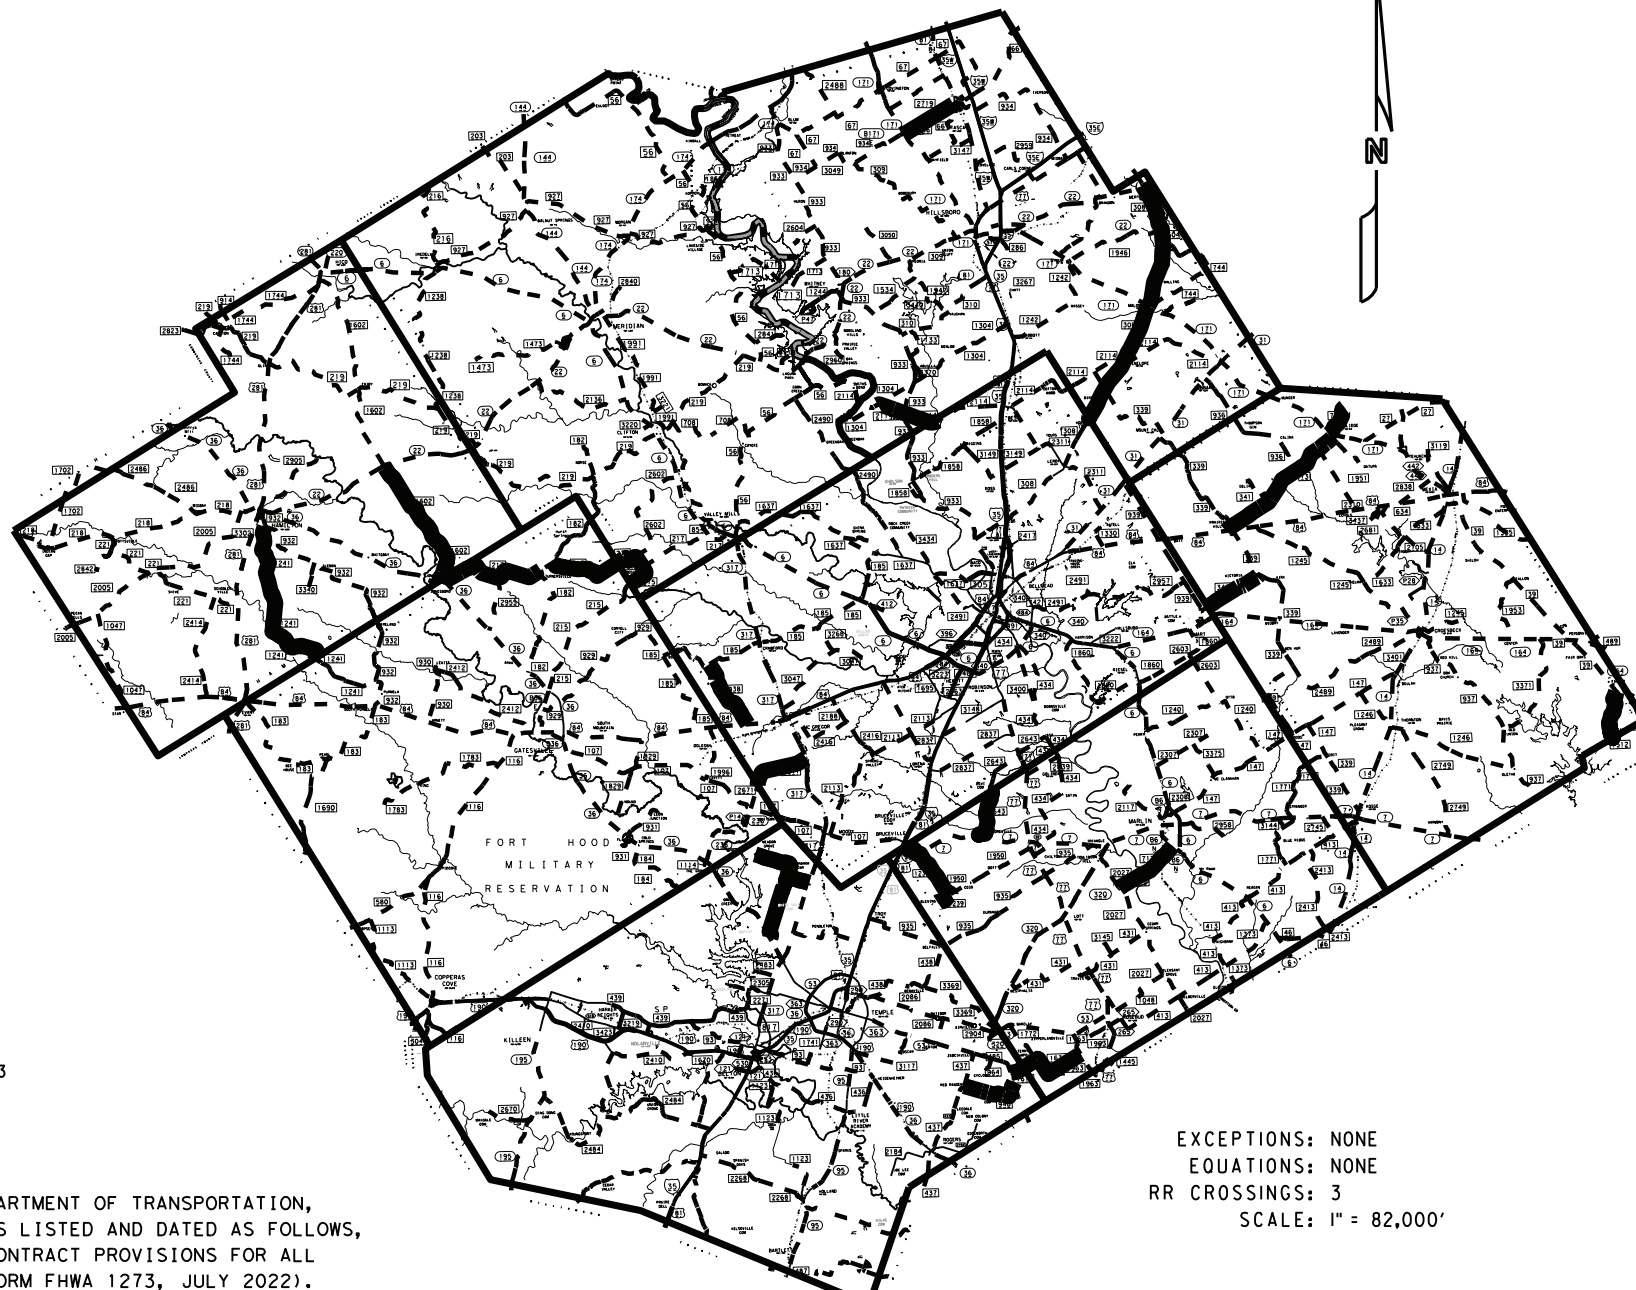

DESIGN	FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.	HIGHWAY NO.
GRAPHICS	6	F 2024 (015), ETC.	FM 217, etc
CHECK	STATE	DISTRICT	COUNTY
CHECK	TEXAS	WACO	Coryell, etc
CHECK	CONTROL	SECTION	JOB
	0833	01	009, etc.

2024 SEAL COAT

SIGNS G20-5T, G20-6T, R2-1, R20-5aP, R20-5T, R20-5aTP, G20-10T, R20-3T, AND G20-2 SHALL BE PLACED AT EACH END OF THE PROJECT UNDER CONSTRUCTION.

SIGNS CW20-ID, CW21-2, CW20-7d, CW20-7a, FLAGMAN AND CONES SHALL BE USED IN THE VICINITY OF ACTUAL WORK AS DIRECTED BY THE ENGINEER.

SIGNS CW20-ID AND G20-2 SHALL BE PLACED AT ALL ROAD INTERSECTIONS OF PROJECTS UNDER CONSTRUCTION.

SIGNS G20-1aT SHALL BE PLACED AT ALL STATE HIGHWAY INTERSECTIONS.

ALL DEVICES SHALL BE PLACED IN ACCORDANCE WITH THE TEXAS MUTCD AND AS DIRECTED BY THE ENGINEER.



Recommended for Letting
DocuSigned by: 7/6/2023

W. J. ... P.E.
D3F082798B8543C...
Area Engineer

Recommended for Letting
DocuSigned by: 7/6/2023

Uita ... P.E.
9AD8C743F95E4E3...
Director of Transportation Planning & Development


Approved for Letting
DocuSigned by: 7/6/2023

Stanley Swiatek
B69BD796DD564C9...
District Engineer

EXCEPTIONS: NONE
EQUATIONS: NONE
RR CROSSINGS: 3
SCALE: 1" = 82,000'

COUNTY PROJECT MAP BELL COUNTY TEXAS LEGEND

- NATIONAL OR STATE BOUNDARY
- - - COUNTY BOUNDARY
- - - LIMIT OF ENLARGED DETAIL
- CITY LIMIT
- RAILROAD
- PRIVATE ROAD
- STATE-OTHER
- ===== DIVIDED ROAD
- ===== PAVED ROAD
- ===== ALL WEATHER ROAD
- ===== EARTH ROAD
- ===== ROAD IN CITY
- ===== DIVIDED ROADWAY WITH FRONTAGE ROADS
- * 4.3 9.0 * MILEAGE BETWEEN POINTS
- 20 INTERSTATE HIGHWAY
- 290 U S NUMBERED HIGHWAY
- 78 STATE HIGHWAY
- 42 STATE HIGHWAY-LOOP OR SPUR
- B21 STATE HIGHWAY PARK ROAD
- 144 FARM OR RANCH TO MARKET ROAD
- R15 RECREATIONAL ROAD
- B78 B20 B59 BUSINESS ROUTES
- COUNTY SEAT
- TOWN SYMBOLS
- BRIDGE OR CROSSING SEPARATION OVER 20'
- LOW WATER CROSSING
- INTERMITTENT STREAM
- FLOWING STREAM
- SHIP OR BARGE CHANNEL
- LAKE WITH DAM
- AREA SUBJECT TO INUNDATION
- INTERMITTENT LAKE
- PROMINENT ELEVATION
- ESCARPMENT OR BLUFF
- AIRPORT WITH FACILITIES
- MILITARY AIRBASE
- HISTORIC SITE
- SDHPT CO LINE MARKER
- U S CUSTOMS PORT OF ENTRY
- SDHPT TOURIST BUREAU
- CEMETERY
- SDHPT DISTRICT OFFICE
- SDHPT WAREHOUSE
- COUNTRY CLUB / GOLF COURSE

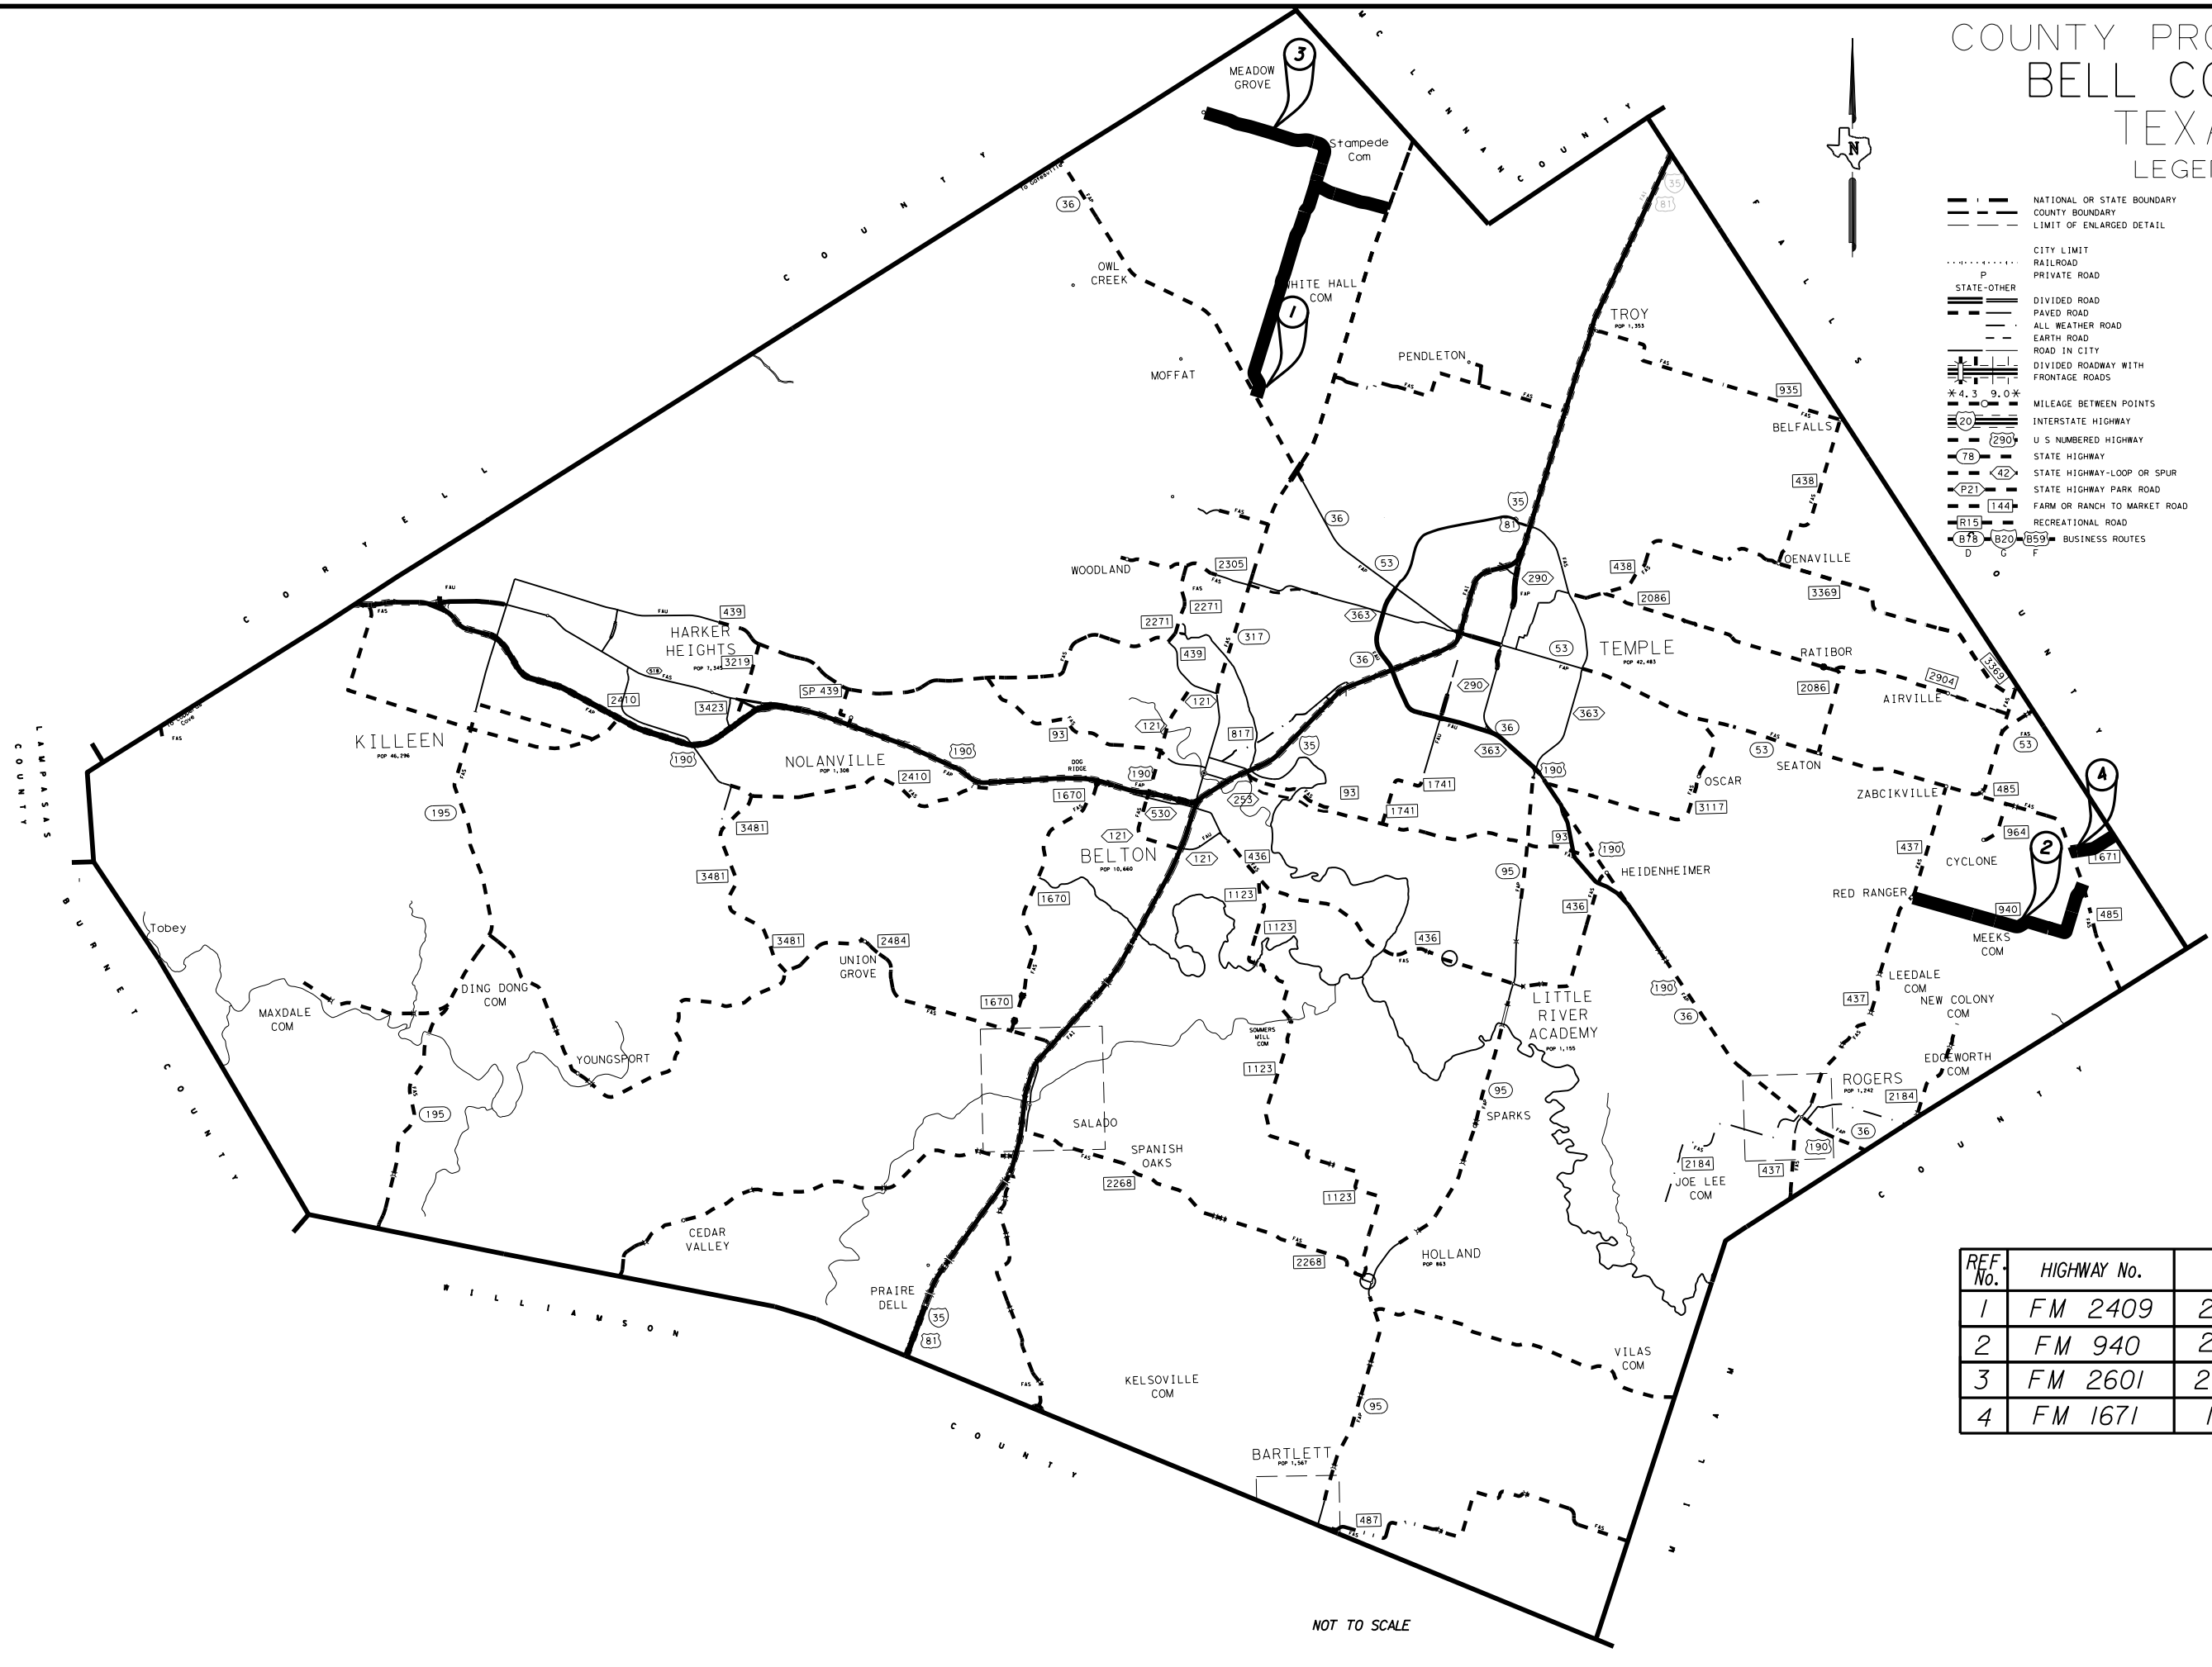

REF. No.	HIGHWAY No.	CONTROL No.
1	FM 2409	2303-02-010
2	FM 940	2504-01-008
3	FM 2601	2602-02-013
4	FM 1671	1656-01-014



FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		2
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB
0833	01	009, etc.
		HIGHWAY NO.
		FM 217, etc

NOT TO SCALE

COUNTY PROJECT MAP


BOSQUE COUNTY

TEXAS

LEGEND

- | | | | |
|--|-------------------------------------|--|--|
| | NATIONAL OR STATE BOUNDARY | | COUNTY SEAT |
| | COUNTY BOUNDARY | | TOWN SYMBOLS |
| | LIMIT OF ENLARGED DETAIL | | BRIDGE OR CROSSING SEPARATION OVER 20' |
| | CITY LIMIT | | LOW WATER CROSSING |
| | RAILROAD | | INTERMITTENT STREAM |
| | PRIVATE ROAD | | FLOWING STREAM |
| | STATE-OTHER | | SHIP OR BARGE CHANNEL |
| | DIVIDED ROAD | | LAKE WITH DAM |
| | ALL WEATHER ROAD | | AREA SUBJECT TO INUNDATION |
| | EARTH ROAD | | INTERMITTENT LAKE |
| | ROAD IN CITY | | PROMINENT ELEVATION |
| | DIVIDED ROADWAY WITH FRONTAGE ROADS | | ESCARPMENT OR BLUFF |
| | MILEAGE BETWEEN POINTS | | AIRPORT WITH FACILITIES |
| | INTERSTATE HIGHWAY | | MILITARY AIRBASE |
| | U.S. NUMBERED HIGHWAY | | HISTORIC SITE |
| | STATE HIGHWAY | | U.S. CUSTOMS PORT OF ENTRY |
| | STATE HIGHWAY-LOOP OR SPUR | | TXDOT TOURIST BUREAU |
| | STATE HIGHWAY PARK ROAD | | CEMETERY |
| | FARM OR RANCH TO MARKET ROAD | | TXDOT DISTRICT OFFICE |
| | RECREATIONAL ROAD | | TXDOT WAREHOUSE |
| | BUSINESS ROUTES | | COUNTRY CLUB / GOLF COURSE |

REF. No.	HIGHWAY No.	CONTROL No.
5	FM 217	0833-02-021
6	FM 215	2871-02-008

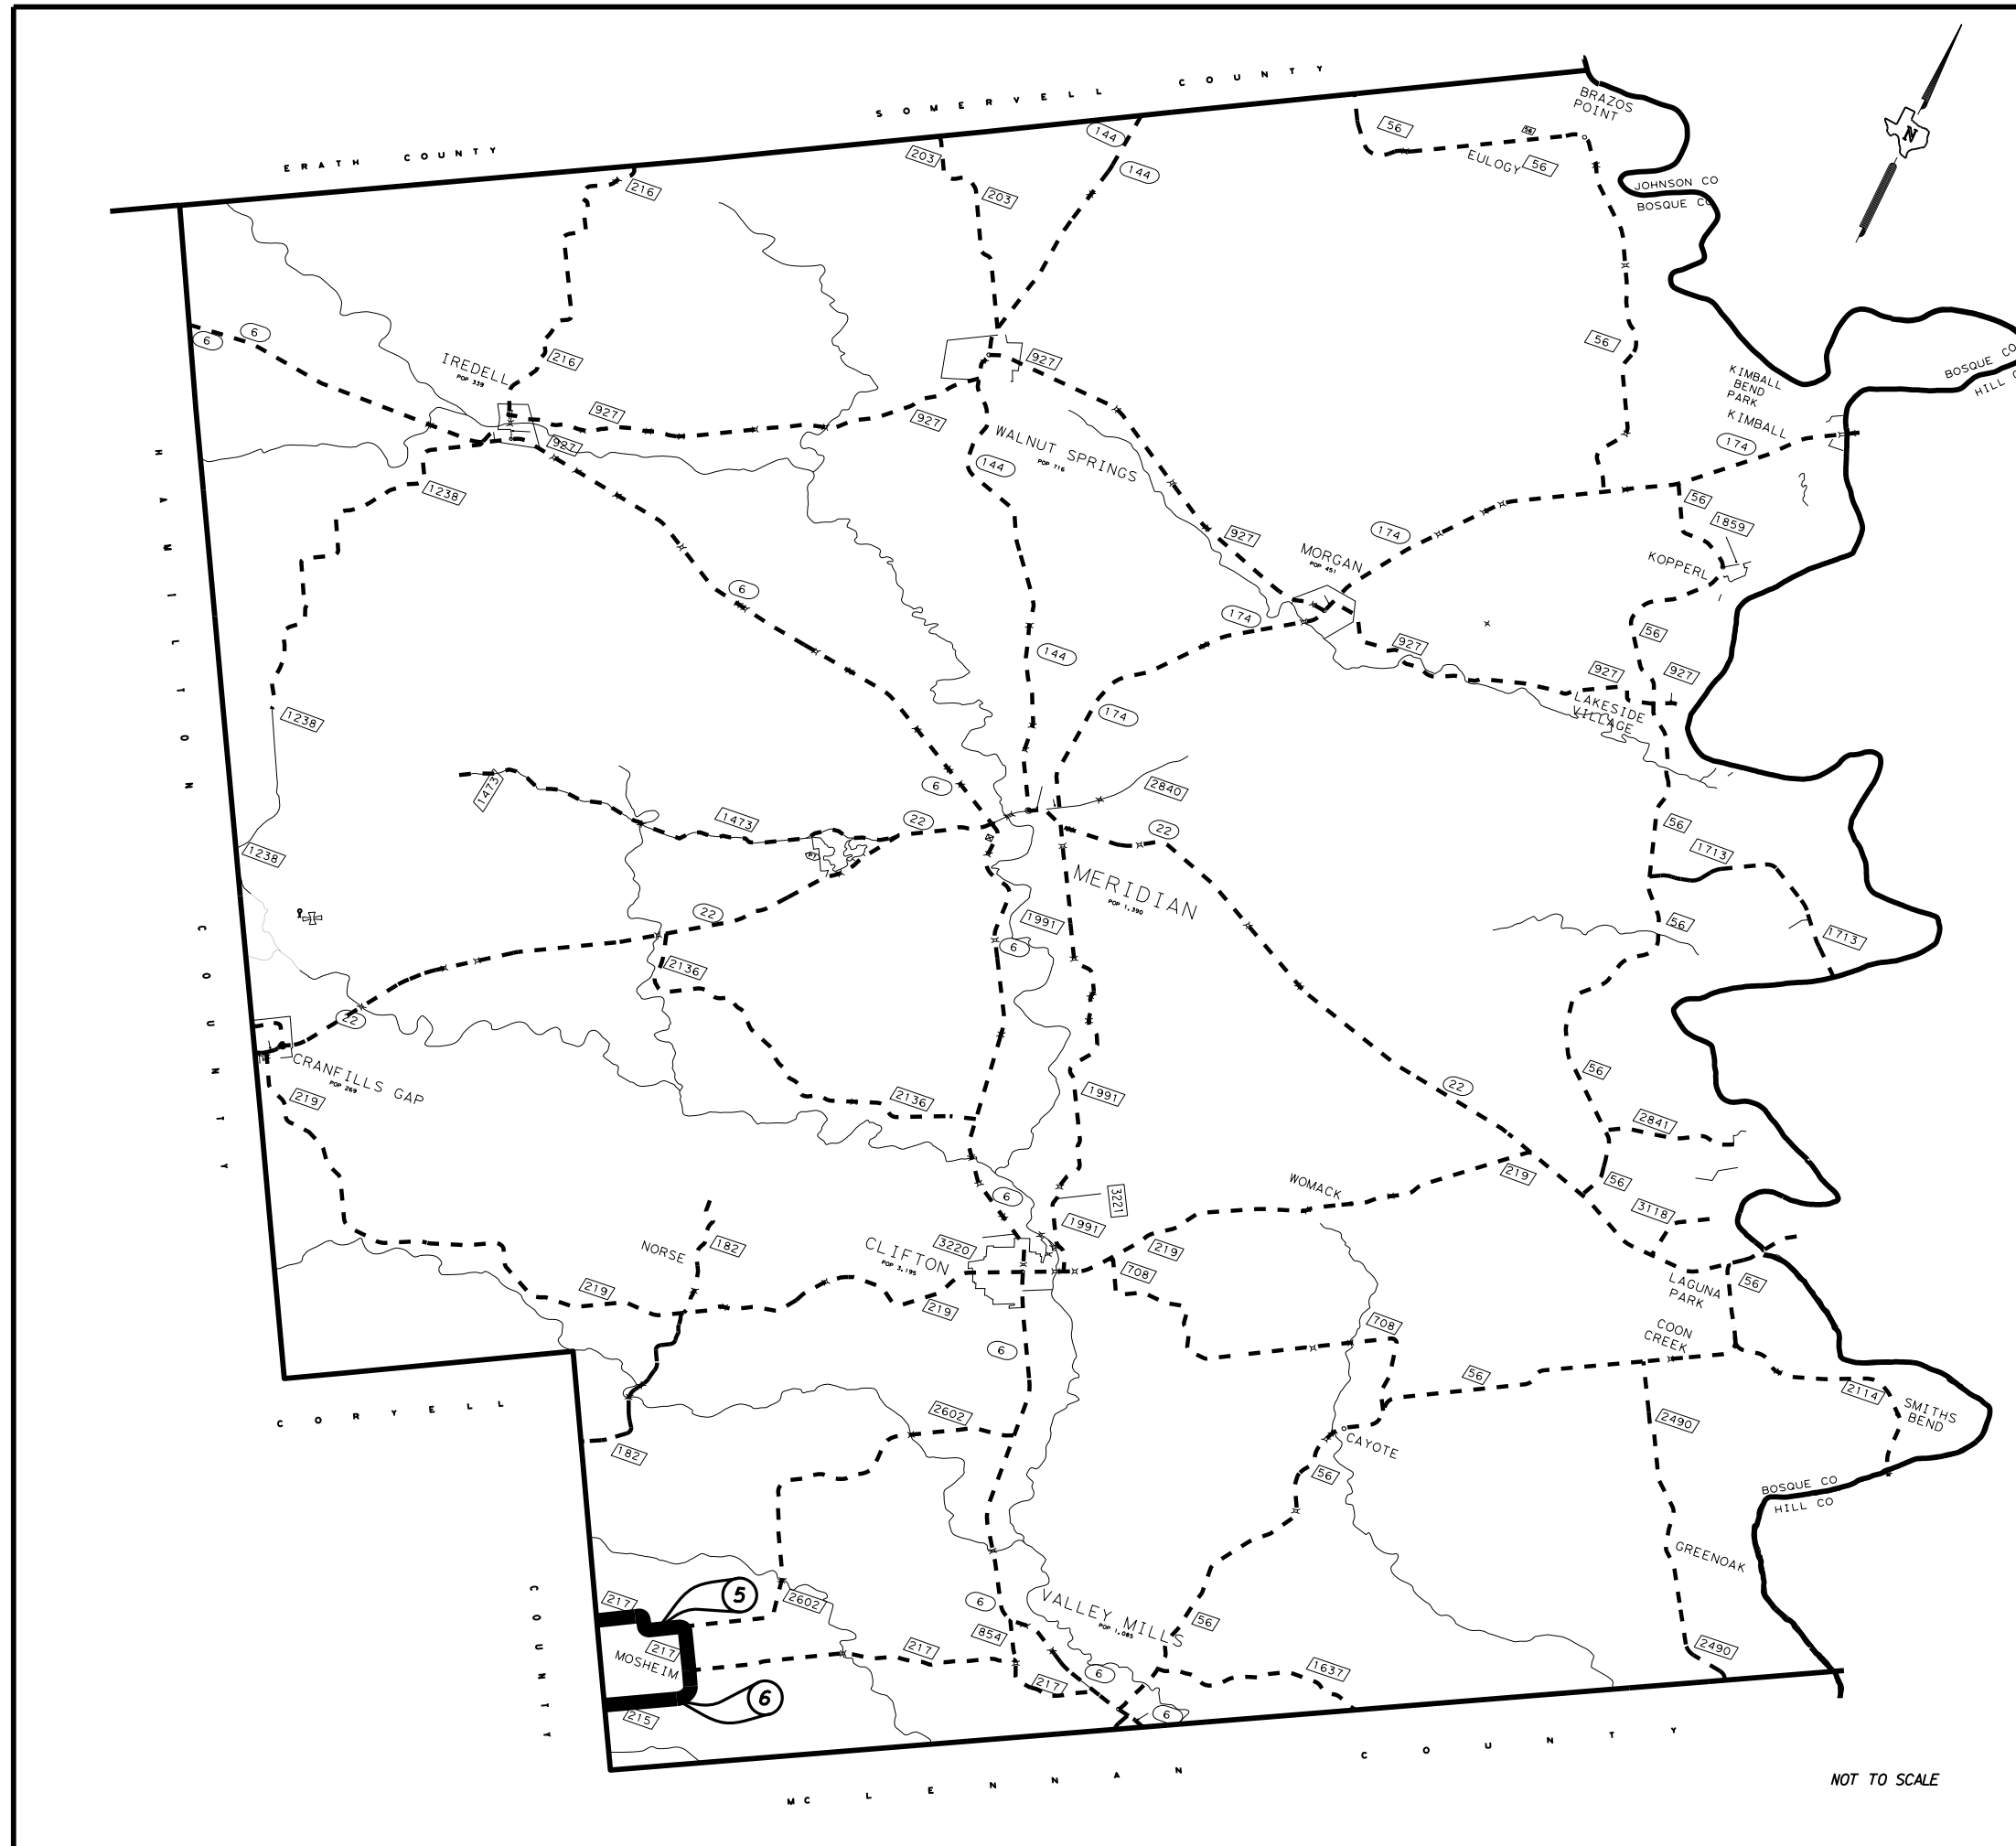

NOT TO SCALE




FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		3
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB
0833	01	009, etc.
		HIGHWAY NO.
		FM 217, etc

COUNTY PROJECT MAP

CORYELL COUNTY


TEXAS



LEGEND

- | | |
|--|--|
| <ul style="list-style-type: none"> — — — NATIONAL OR STATE BOUNDARY — — — COUNTY BOUNDARY - - - - - LIMIT OF ENLARGED DETAIL - - - - - CITY LIMIT RAILROAD - - - - - PRIVATE ROAD - - - - - STATE-OTHER - - - - - DIVIDED ROAD - - - - - PAVED ROAD - - - - - ALL WEATHER ROAD - - - - - EARTH ROAD - - - - - ROAD IN CITY - - - - - DIVIDED ROADWAY WITH FRONTAGE ROADS * 4.3 9.0 * MILEAGE BETWEEN POINTS 20 INTERSTATE HIGHWAY 290 U S NUMBERED HIGHWAY 78 STATE HIGHWAY 42 STATE HIGHWAY-LOOP OR SPUR P21 STATE HIGHWAY PARK ROAD 144 FARM OR RANCH TO MARKET ROAD R15 RECREATIONAL ROAD B78 B20 B59 BUSINESS ROUTES | <ul style="list-style-type: none"> ○ COUNTY SEAT ○ TOWN SYMBOLS ⊗ BRIDGE OR CROSSING SEPARATION OVER 20' ⊗ LOW WATER CROSSING ~ INTERMITTENT STREAM ~ FLOWING STREAM ~ SHIP OR BARGE CHANNEL △ LAKE WITH DAM △ AREA SUBJECT TO INUNDATION △ INTERMITTENT LAKE ⊗ 1212' PROMINENT ELEVATION ⊗ ESCARPMENT OR BLUFF ⊗ AIRPORT WITH FACILITIES ⊗ MILITARY AIRBASE ⊗ HISTORIC SITE ⊗ TXDOT CO LINE MARKER ⊗ U S CUSTOMS PORT OF ENTRY ⊗ TXDOT TOURIST BUREAU ⊗ CEMETERY ⊗ TXDOT DISTRICT OFFICE ⊗ TXDOT WAREHOUSE ⊗ COUNTRY CLUB / GOLF COURSE |
|--|--|

REF. No.	HIGHWAY No.	CONTROL No.
7	FM 217	0833-01-009
8	FM 217	2138-01-014
9	FM 215	2871-01-016

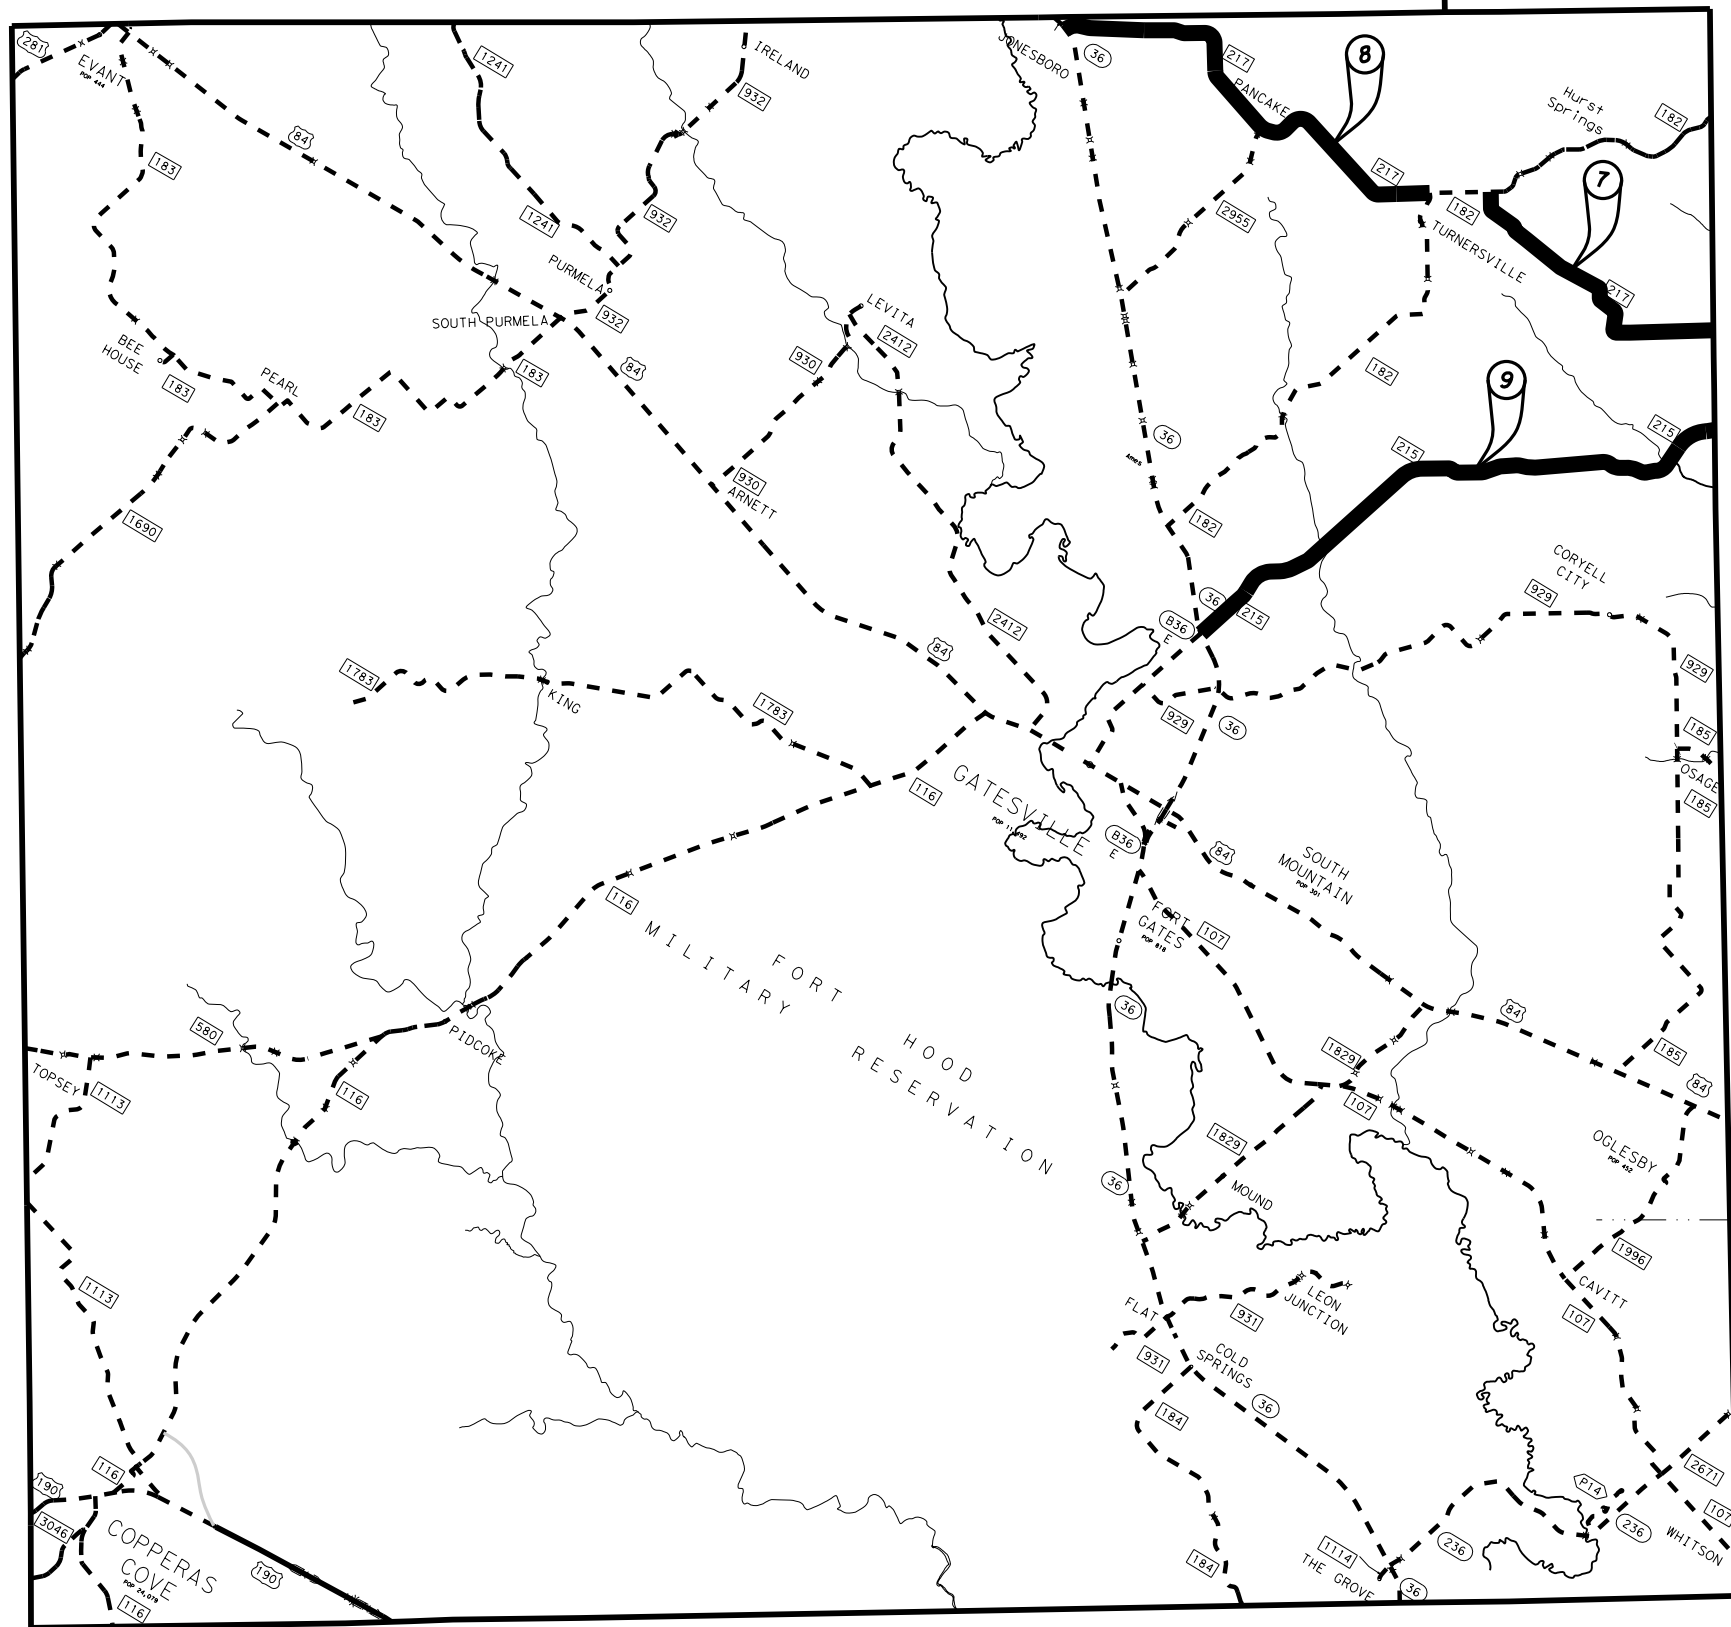

NOT TO SCALE




FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		4
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB HIGHWAY NO.
0833	01	009, etc. FM 217, etc

COUNTY PROJECT MAP FALLS COUNTY TEXAS

LEGEND

- NATIONAL OR STATE BOUNDARY
- - - COUNTY BOUNDARY
- - - LIMIT OF ENLARGED DETAIL
- CITY LIMIT
- RAILROAD
- PRIVATE ROAD
- STATE-OTHER
- DIVIDED ROAD
- PAVED ROAD
- ALL WEATHER ROAD
- EARTH ROAD
- ROAD IN CITY
- DIVIDED ROADWAY WITH FRONTAGE ROADS
- MILEAGE BETWEEN POINTS
- INTERSTATE HIGHWAY
- U S NUMBERED HIGHWAY
- STATE HIGHWAY
- STATE HIGHWAY-LOOP OR SPUR
- STATE HIGHWAY PARK ROAD
- FARM OR RANCH TO MARKET ROAD
- RECREATIONAL ROAD
- BUSINESS ROUTES
- COUNTY SEAT
- TOWN SYMBOLS
- BRIDGE OR CROSSING SEPARATION OVER 20'
- LOW WATER CROSSING
- INTERMITTENT STREAM
- FLOWING STREAM
- SHIP OR BARGE CHANNEL
- LAKE WITH DAM
- AREA SUBJECT TO INUNDATION
- INTERMITTENT LAKE
- PROMINENT ELEVATION
- ESCARPMENT OR BLUFF
- AIRPORT WITH FACILITIES
- MILITARY AIRBASE
- HISTORIC SITE
- SDHPT CD LINE MARKER
- U S CUSTOMS PORT OF ENTRY
- SDHPT TOURIST BUREAU
- CEMETERY
- SDHPT DISTRICT OFFICE
- SDHPT WAREHOUSE
- COUNTRY CLUB / GOLF COURSE

REF. No.	HIGHWAY No.	CONTROL No.
10	FM 1671	1656-02-017
11	FM 2643	1078-01-009
12	FM 712	2634-01-019

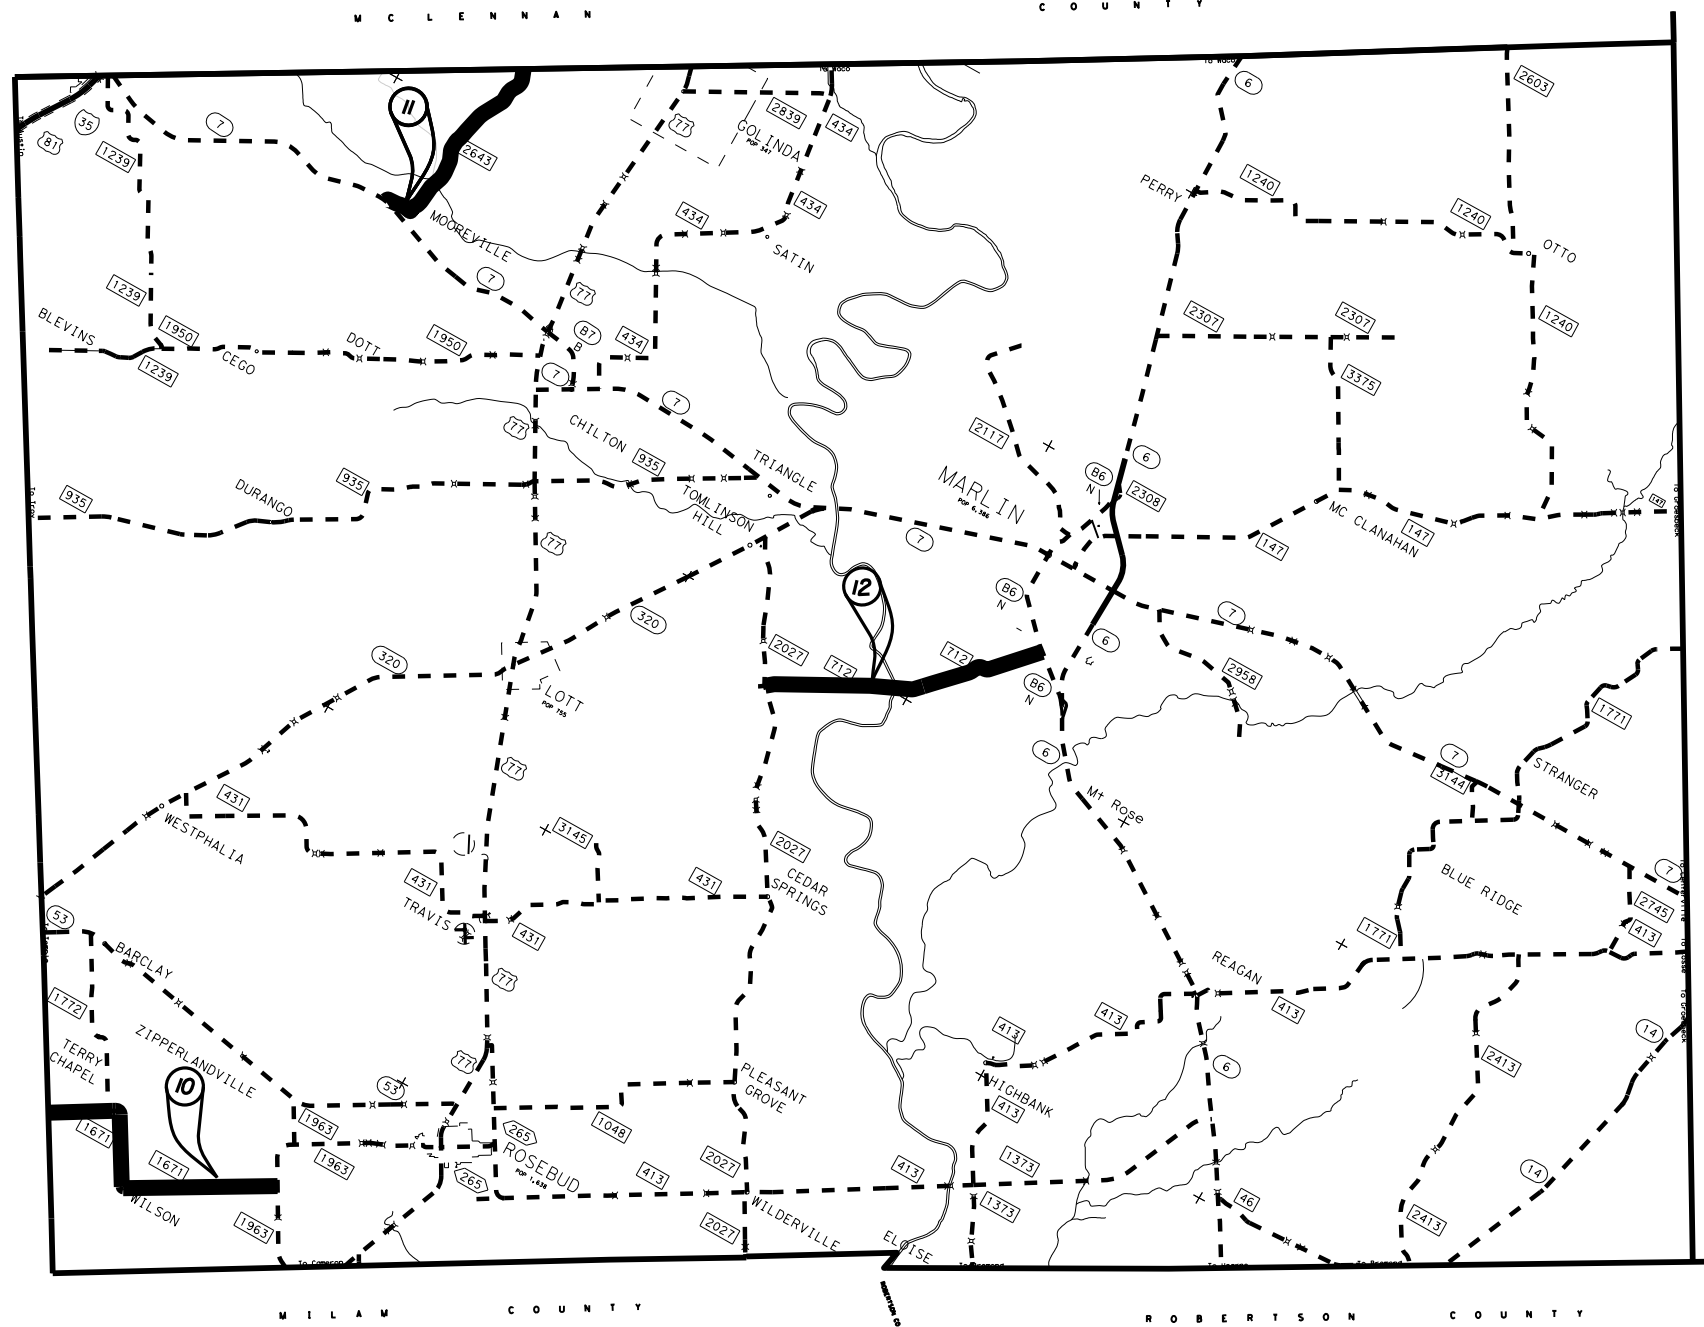

NOT TO SCALE




FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		5
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB
0833	01	009, etc.
		HIGHWAY NO.
		FM 217, etc

COUNTY PROJECT MAP HAMILTON COUNTY TEXAS

LEGEND

- NATIONAL OR STATE BOUNDARY
- COUNTY BOUNDARY
- LIMIT OF ENLARGED DETAIL
- CITY LIMIT
- RAILROAD
- PRIVATE ROAD
- STATE-OTHER
- DIVIDED ROAD
- PAVED ROAD
- ALL WEATHER ROAD
- EARTH ROAD
- ROAD IN CITY
- DIVIDED ROADWAY WITH FRONTAGE ROADS
- MILEAGE BETWEEN POINTS
- INTERSTATE HIGHWAY
- U S NUMBERED HIGHWAY
- STATE HIGHWAY
- STATE HIGHWAY-LOOP OR SPUR
- STATE HIGHWAY PARK ROAD
- FARM OR RANCH TO MARKET ROAD
- RECREATIONAL ROAD
- BUSINESS ROUTES
- COUNTY SEAT
- TOWN SYMBOLS
- BRIDGE OR CROSSING SEPARATION OVER 20'
- LOW WATER CROSSING
- INTERMITTENT STREAM
- FLOWING STREAM
- SHIP OR BARGE CHANNEL
- LAKE WITH DAM
- AREA SUBJECT TO INUNDATION
- INTERMITTENT LAKE
- PROMINENT ELEVATION ESCARPMENT OR BLUFF
- AIRPORT WITH FACILITIES
- MILITARY AIRBASE
- HISTORIC SITE
- SDHP CO LINE MARKER
- U S CUSTOMS PORT OF ENTRY
- SDHP TOURIST BUREAU
- CEMETERY
- SDHP DISTRICT OFFICE
- SDHP WAREHOUSE
- COUNTRY CLUB / GOLF COURSE

REF. No.	HIGHWAY No.	CONTROL No.
13	FM 1241	0550-08-014
14	FM 1602	0774-05-015

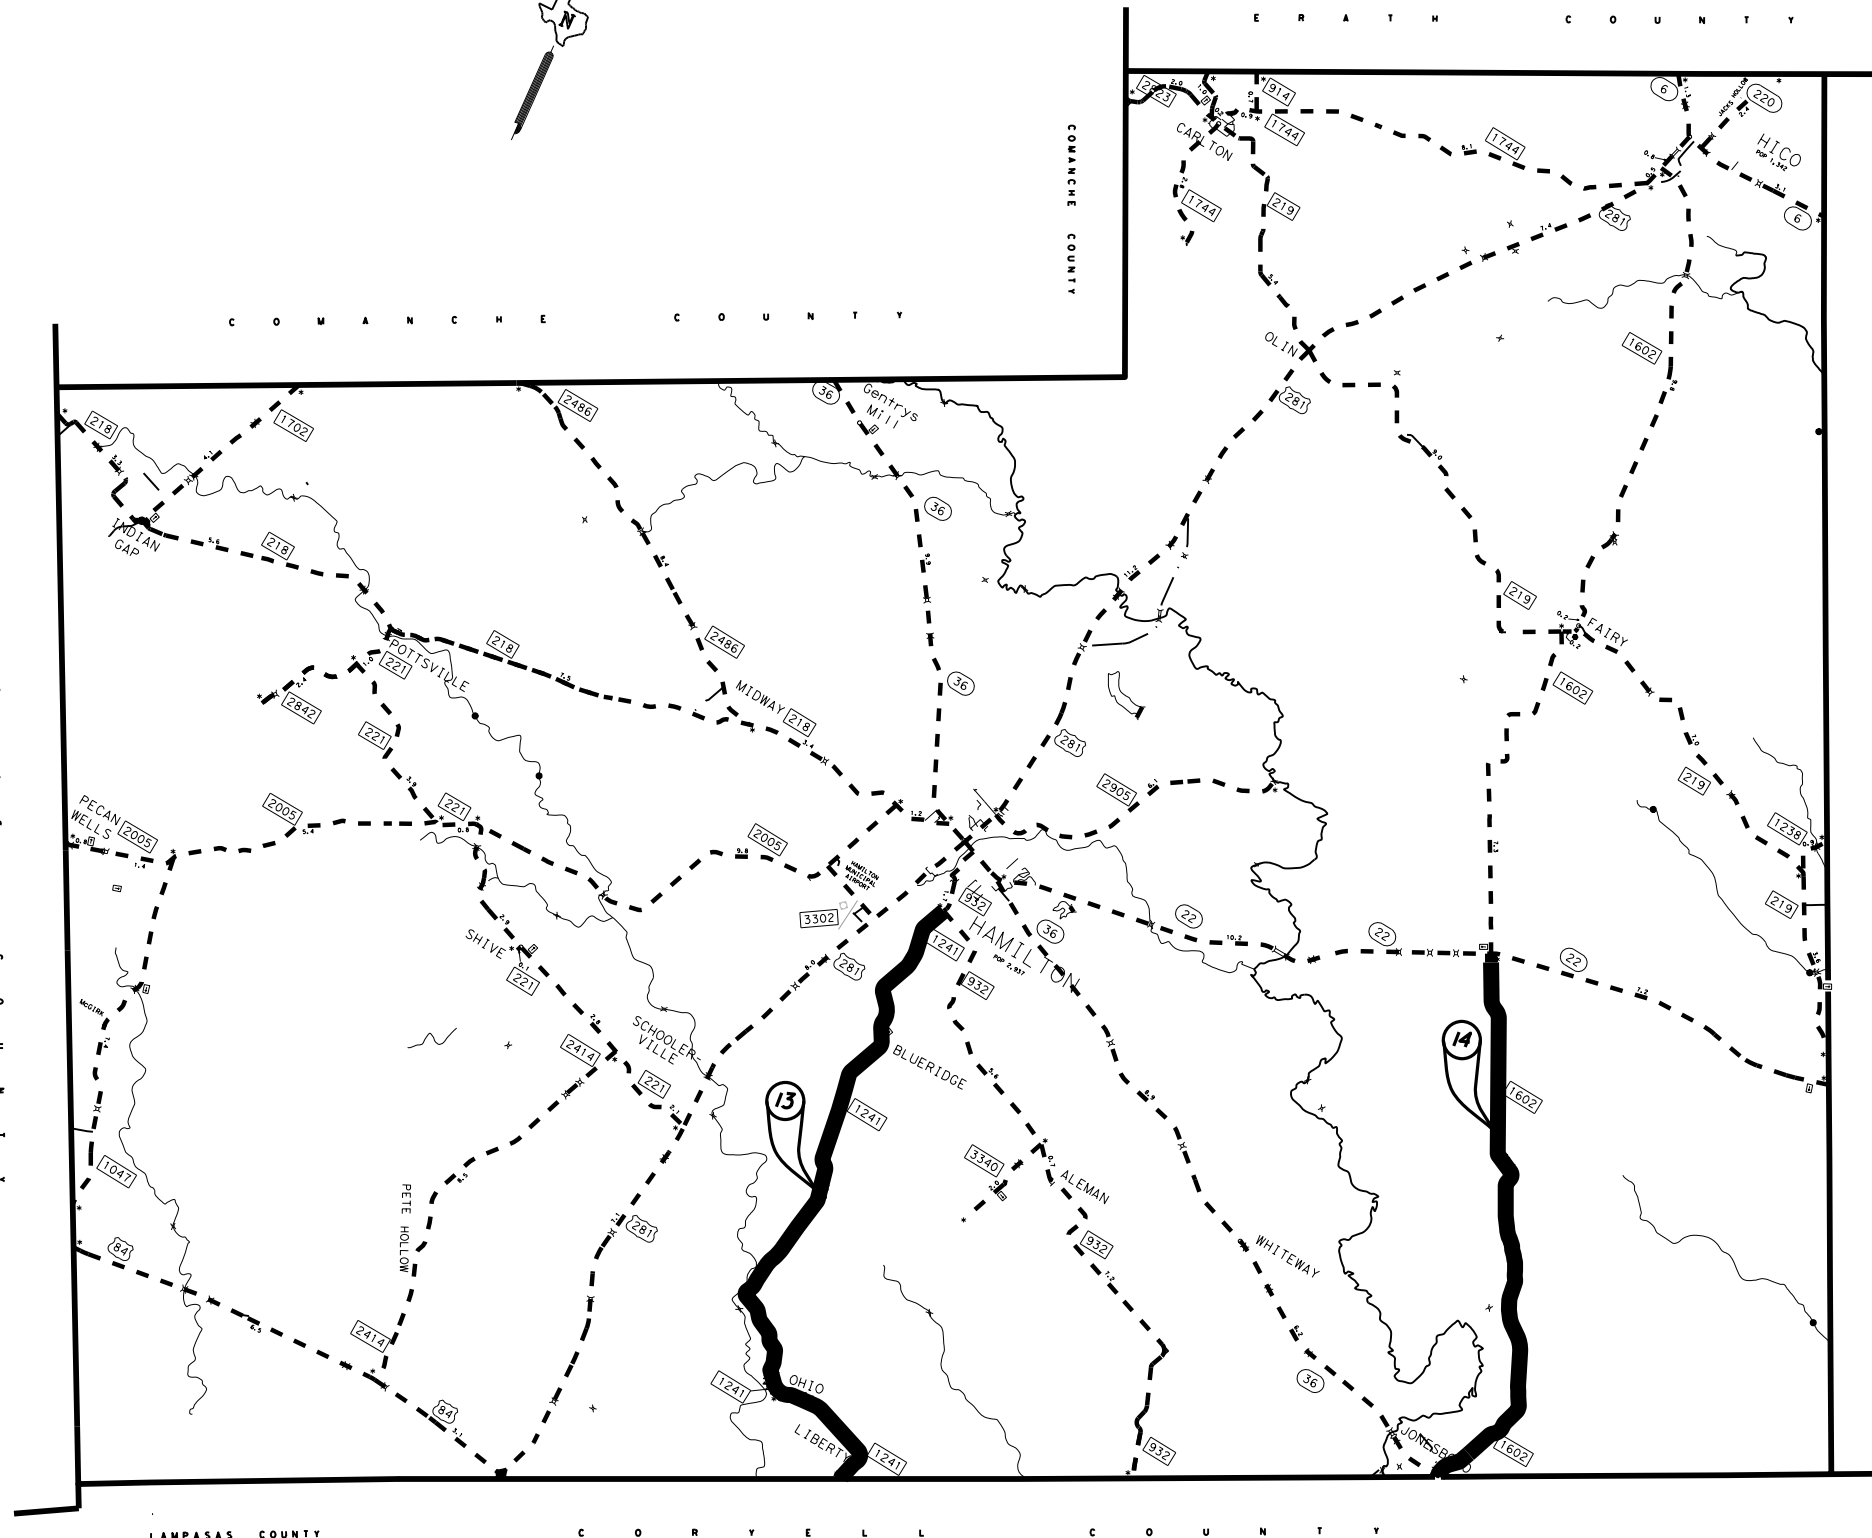


NOT TO SCALE



FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		6
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB
0833	01	009, etc.
		HIGHWAY NO.
		FM 217, etc

COUNTY PROJECT MAP HILL COUNTY TEXAS LEGEND

- NATIONAL OR STATE BOUNDARY
- COUNTY BOUNDARY
- LIMIT OF ENLARGED DETAIL
- CITY LIMIT
- RAILROAD
- PRIVATE ROAD
- STATE-OTHER
- DIVIDED ROAD
- PAVED ROAD
- ALL WEATHER ROAD
- EARTH ROAD
- ROAD IN CITY
- DIVIDED ROADWAY WITH FRONTAGE ROADS
- MILEAGE BETWEEN POINTS
- INTERSTATE HIGHWAY
- U S NUMBERED HIGHWAY
- STATE HIGHWAY
- STATE HIGHWAY-LOOP OR SPUR
- STATE HIGHWAY PARK ROAD
- FARM OR RANCH TO MARKET ROAD
- RECREATIONAL ROAD
- BUSINESS ROUTES
- COUNTY SEAT
- TOWN SYMBOLS
- BRIDGE OR CROSSING SEPARATION OVER 20'
- LOW WATER CROSSING
- INTERMITTENT STREAM
- FLOWING STREAM
- SHIP OR BARGE CHANNEL
- LAKE WITH DAM
- AREA SUBJECT TO INUNDATION
- INTERMITTENT LAKE
- PROMINENT ELEVATION ESCARPMENT OR BLUFF
- AIRPORT WITH FACILITIES
- MILITARY AIRBASE
- HISTORIC SITE
- U S CUSTOMS PORT OF ENTRY
- SDHPT TOURIST BUREAU
- CEMETERY
- SDHPT DISTRICT OFFICE
- SDHPT WAREHOUSE
- COUNTRY CLUB / GOLF COURSE

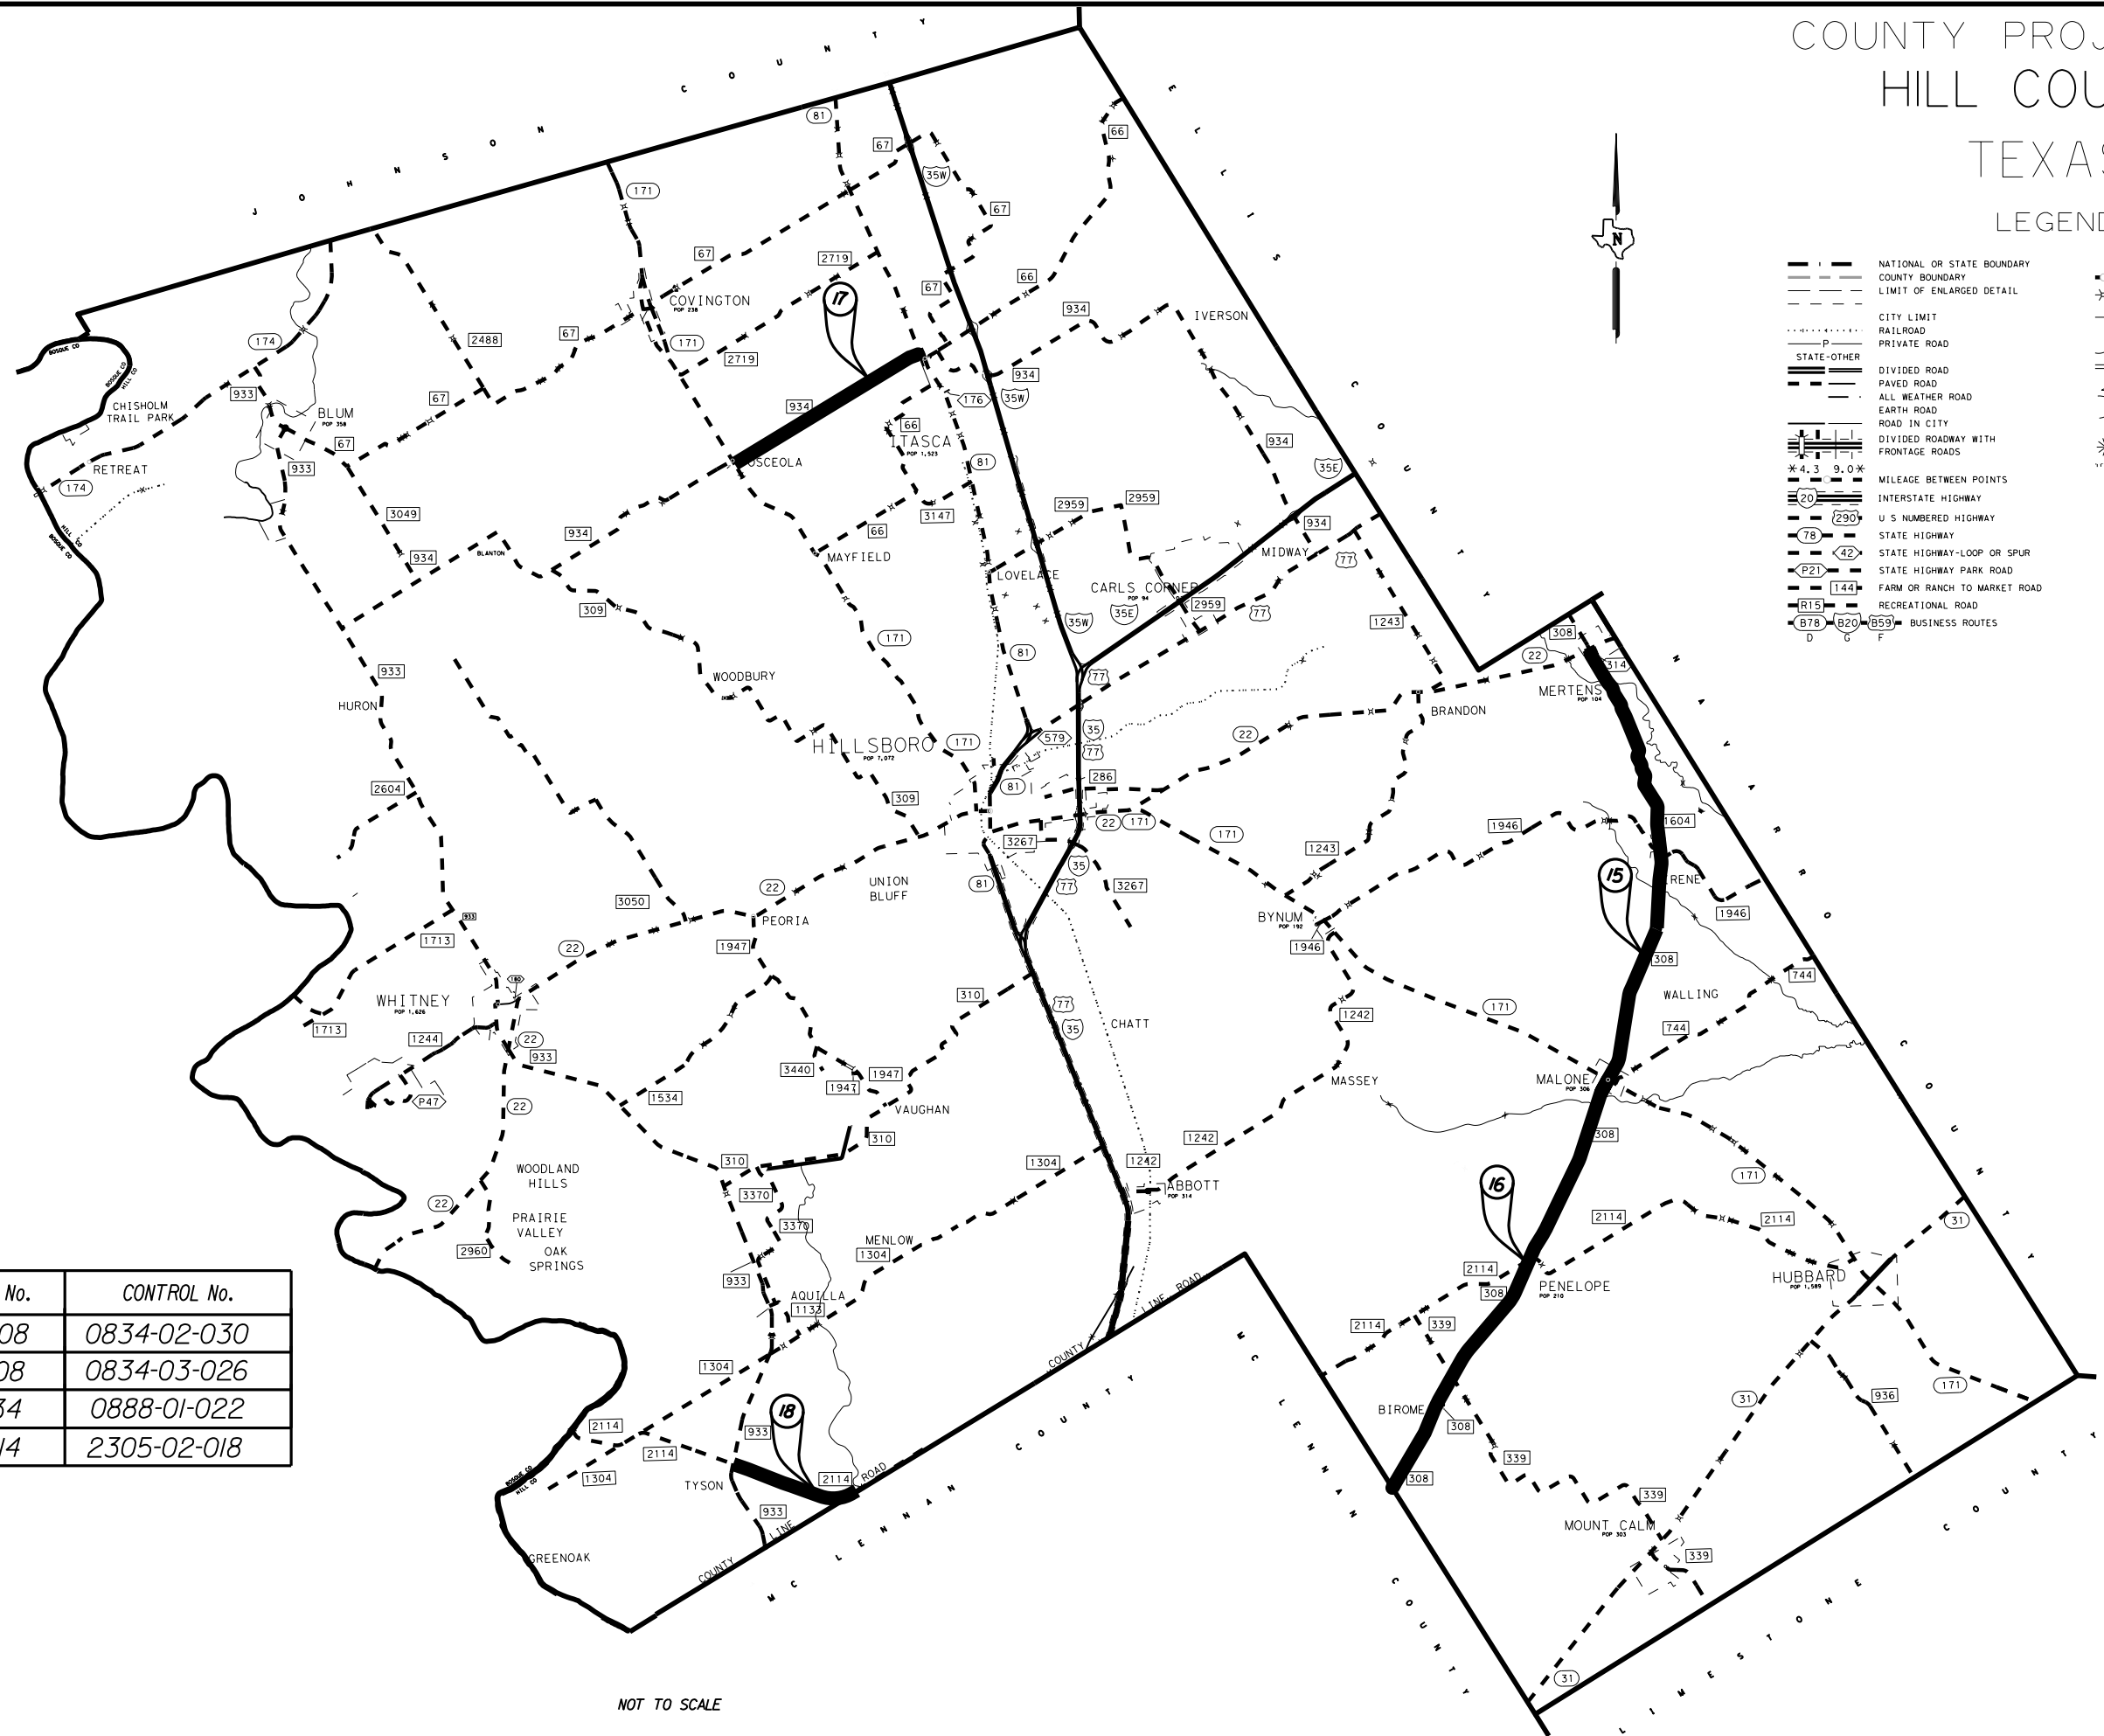


REF. No.	HIGHWAY No.	CONTROL No.
15	FM 308	0834-02-030
16	FM 308	0834-03-026
17	FM 934	0888-01-022
18	FM 2114	2305-02-018

NOT TO SCALE



FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		7
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB
0833	01	009, etc.
		HIGHWAY NO.
		FM 217, etc

COUNTY PROJECT MAP LIMESTONE COUNTY TEXAS

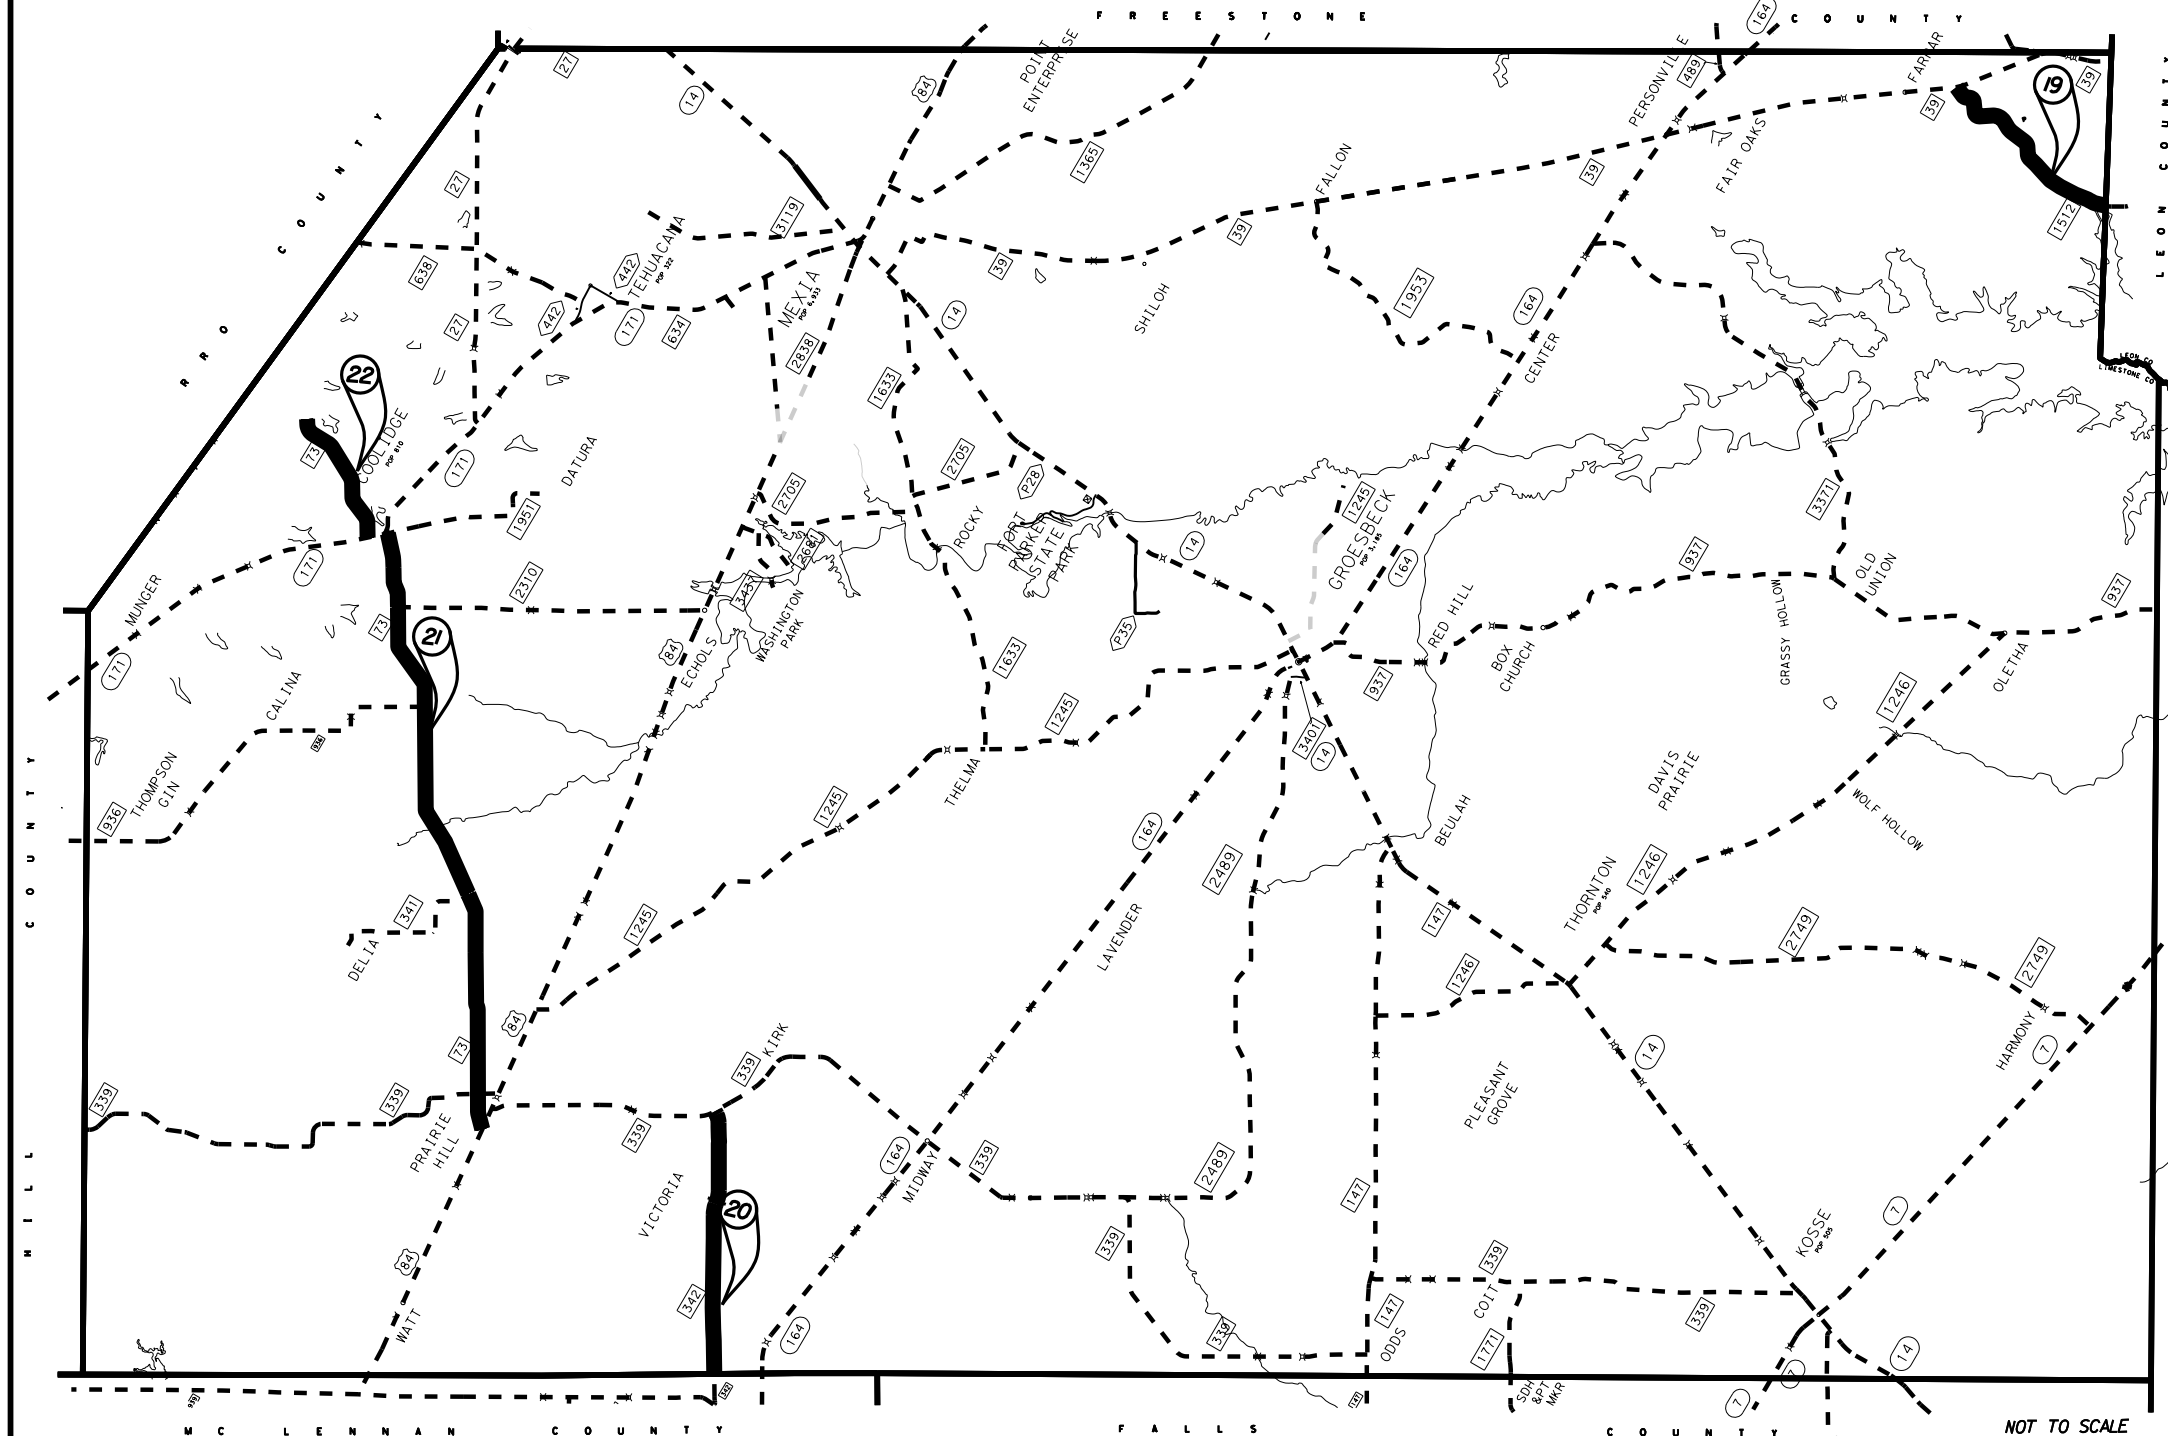

LEGEND

- NATIONAL OR STATE BOUNDARY
- COUNTY BOUNDARY
- LIMIT OF ENLARGED DETAIL
- CITY LIMIT
- RAILROAD
- PRIVATE ROAD
- STATE-OTHER
- DIVIDED ROAD
- PAVED ROAD
- ALL WEATHER ROAD
- EARTH ROAD
- ROAD IN CITY
- DIVIDED ROADWAY WITH FRONTAGE ROADS
- MILEAGE BETWEEN POINTS
- INTERSTATE HIGHWAY
- U S NUMBERED HIGHWAY
- STATE HIGHWAY
- STATE HIGHWAY-LOOP OR SPUR
- STATE HIGHWAY PARK ROAD
- FARM OR RANCH TO MARKET ROAD
- RECREATIONAL ROAD
- BUSINESS ROUTES
- COUNTY SEAT
- TOWN SYMBOLS
- BRIDGE OR CROSSING SEPARATION OVER 20'
- LOW WATER CROSSING
- INTERMITTENT STREAM
- FLOWING STREAM
- SHIP OR BARGE CHANNEL
- LAKE WITH DAM
- AREA SUBJECT TO INUNDATION
- INTERMITTENT LAKE
- PROMINENT ELEVATION ESCARPMENT OR BLUFF
- AIRPORT WITH FACILITIES
- HISTORIC SITE
- SDHPT CO LINE MARKER
- U S CUSTOMS PORT OF ENTRY
- SDHPT TOURIST BUREAU
- CEMETERY
- SDHPT DISTRICT OFFICE
- SDHPT WAREHOUSE
- COUNTRY CLUB / GOLF COURSE


REF. No.	HIGHWAY No.	CONTROL No.
19	FM 1512	1458-02-011
20	FM 342	0831-02-022
21	FM 73	0673-01-023
22	FM 73	3079-02-005

NOT TO SCALE



FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		8
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB
0833	01	009, etc.
		HIGHWAY NO.
		FM 217, etc


COUNTY PROJECT MAP McLENNAN COUNTY TEXAS



LEGEND

- NATIONAL OR STATE BOUNDARY
- COUNTY BOUNDARY
- LIMIT OF ENLARGED DETAIL
- CITY LIMIT
- RAILROAD
- PRIVATE ROAD
- STATE-OTHER
- DIVIDED ROAD
- PAVED ROAD
- ALL WEATHER ROAD
- EARTH ROAD
- ROAD IN CITY
- DIVIDED ROADWAY WITH FRONTAGE ROADS
- MILEAGE BETWEEN POINTS
- INTERSTATE HIGHWAY
- U S NUMBERED HIGHWAY
- STATE HIGHWAY
- STATE HIGHWAY-LOOP OR SPUR
- STATE HIGHWAY PARK ROAD
- FARM OR RANCH TO MARKET ROAD
- RECREATIONAL ROAD
- BUSINESS ROUTES
- COUNTY SEAT
- TOWN SYMBOLS
- BRIDGE OR CROSSING SEPARATION OVER 20'
- LOW WATER CROSSING
- INTERMITTENT STREAM
- FLOWING STREAM
- SHIP OR BARGE CHANNEL
- LAKE WITH DAM
- AREA SUBJECT TO INUNDATION
- INTERMITTENT LAKE
- PROMINENT ELEVATION
- ESCARPMENT OR BLUFF
- AIRPORT WITH FACILITIES
- MILITARY AIRBASE
- HISTORIC SITE
- SDHPT CO LINE MARKER
- U S CUSTOMS PORT OF ENTRY
- SDHPT TOURIST BUREAU
- CEMETERY
- SDHPT DISTRICT OFFICE
- SDHPT WAREHOUSE
- COUNTRY CLUB / GOLF COURSE


REF. No.	HIGHWAY No.	CONTROL No.
23	FM 2671	2674-02-012
24	FM 938	1187-02-019

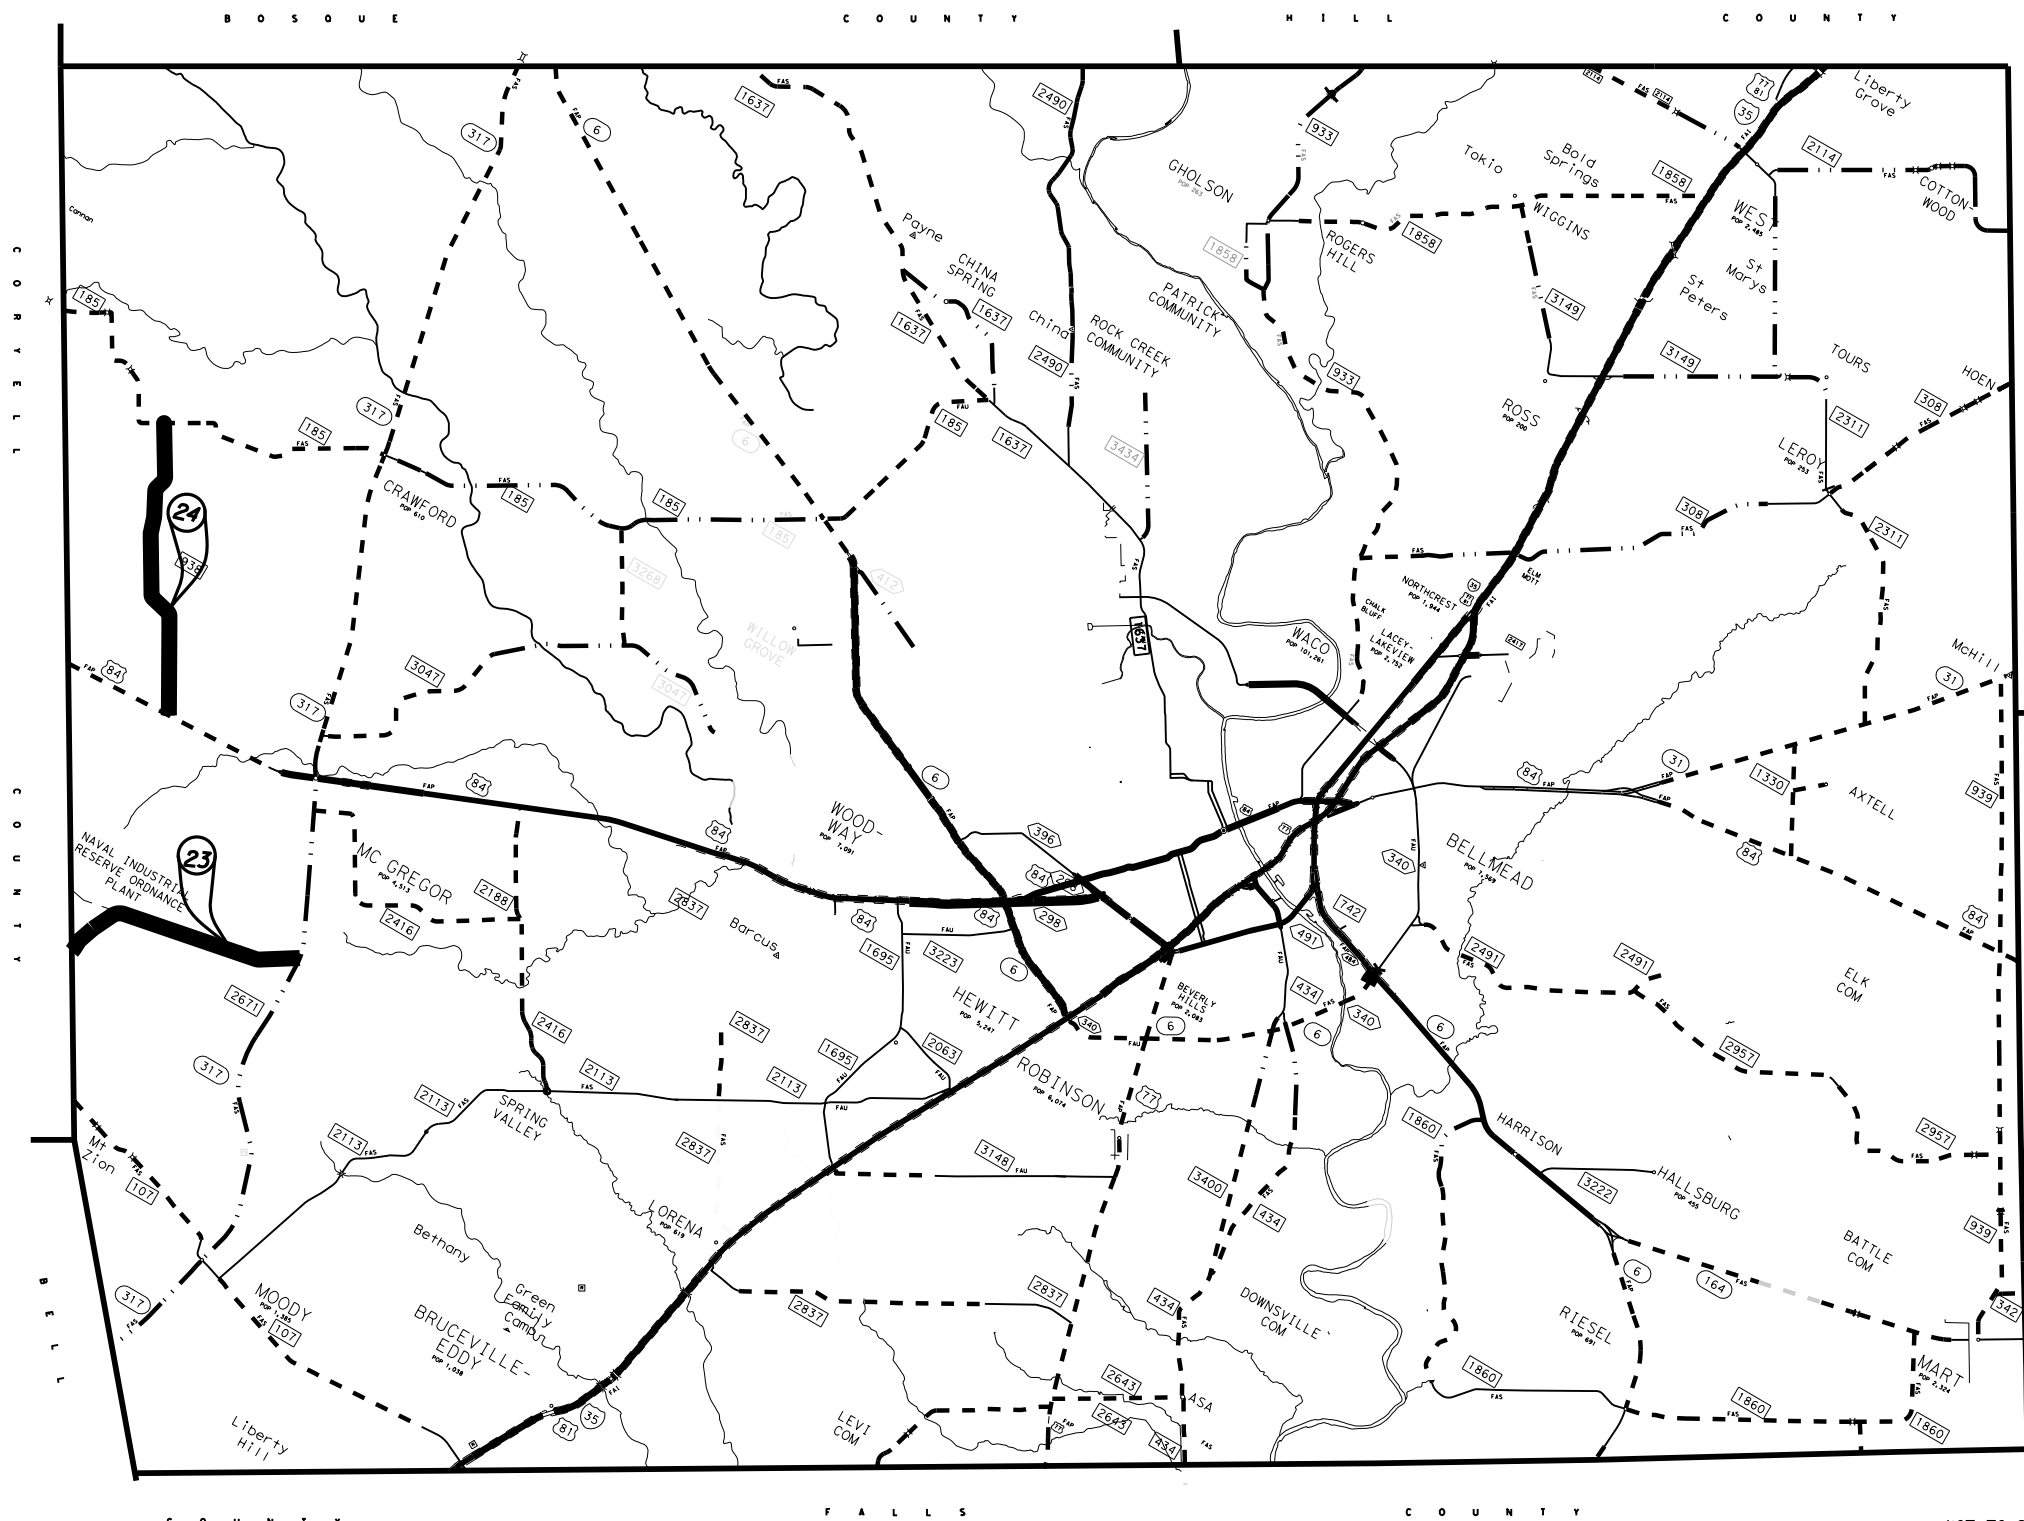


NOT TO SCALE

Texas Department of Transportation


FED. RD. DIV. NO.	PROJECT NO.	SHEET NO.
6		9
STATE	DIST.	COUNTY
TEXAS	WAC	Coryell, etc
CONT.	SECT.	JOB
0833	01	009, etc.
		HIGHWAY NO.
		FM 217, etc

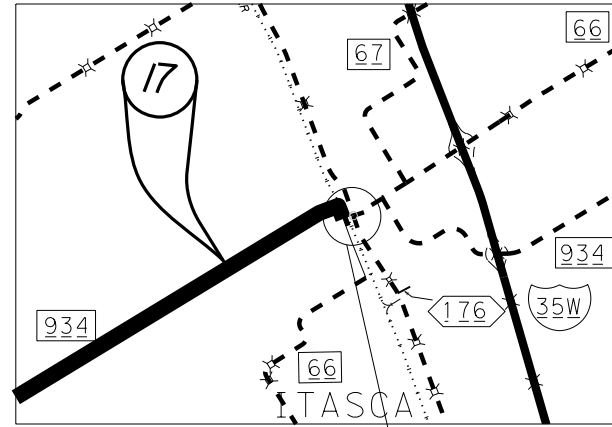


FM 934 (MAIN ST/FM 66)
 CSJ: 0888-01-022
 HILL COUNTY
 DOT: 416 027 L
 RRMP: 206.690
 AT GRADE

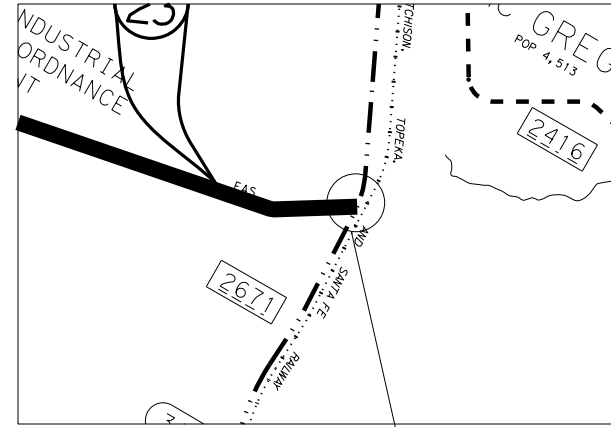

FM 2671 (MCGREGOR S LOOP)
 CSJ: 2674-02-012
 MCLENNAN COUNTY
 DOT: 023 056 J
 RRMP: 239.980
 AT GRADE

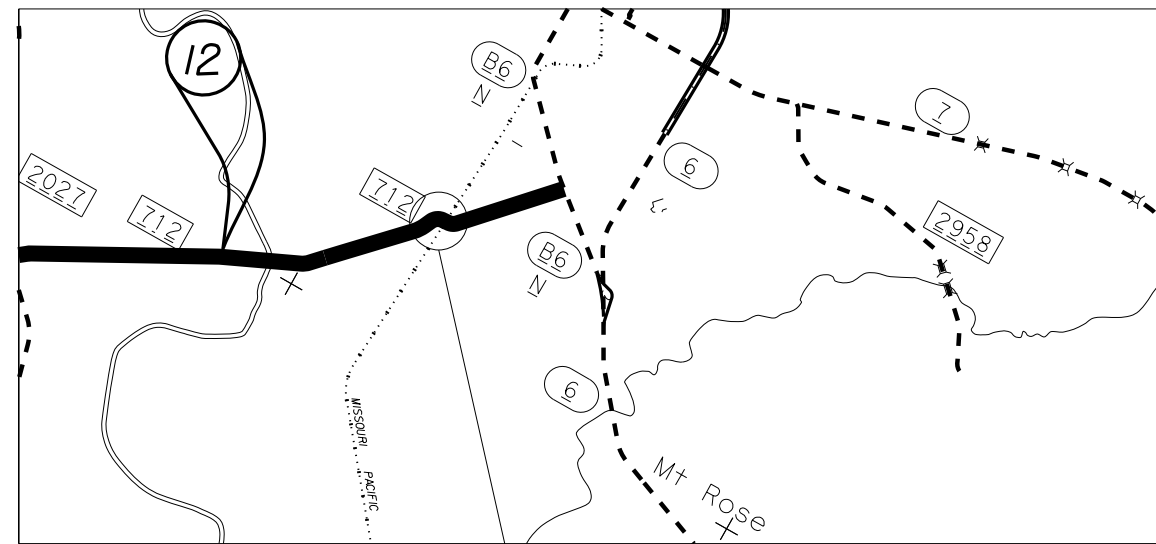

FM 712
 CSJ: 2634-01-019
 FALLS COUNTY
 DOT: 448 426 L
 RRMP: 136.210
 AT GRADE

 © 2023
RAILROAD LOCATION MAPS

NOT TO SCALE

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		10

BASIS OF ESTIMATE TABLES

Table 1: Basis of Estimate for Seal Coats				
Item	Description	Rate	Basis	Quantities
316	SEAL COAT			
	ASPH (TIER II)	0.4 GAL / SY	2,573,159 SY	1,011,693 GAL
	AGGR (TY-PD GR-4 OR TY-PL GR-4)(SAC-B)	1 CY / 135 SY	2,573,159 SY	18,749 CY

GENERAL

The construction, operation and maintenance of the proposed project will be consistent with the state implementation plan as prepared by the Texas Commission on Environmental Quality.

The disturbed area for this project, as shown on the plans is 0 acres. However, the Total Disturbed Area (TDA) will establish the required authorization for storm water discharges. The TDA of this project will be determined by the sum of the disturbed area in all project locations in the contract, and all disturbed area on all Project-Specific Locations (PSL) located in the project limits and/or within 1 mile of the project limits. The department will obtain an authorization to discharge storm water from the Texas Commission on Environmental Quality (TCEQ) for the construction site as shown on the plans, according to the TDA of the project. The Contractor will obtain any required authorization from the TCEQ for the discharge of storm water from any PSL for construction support activities on or off of the project row according to the TDA of the project. When the TDA for the project exceeds 1 acre, provide a copy of the appropriate application of permit (NOI, or Construction Site Notice) to the Engineer, for any PSL located in the project limits or within 1 mile of the project limits. Follow the directives and adhere to all requirements set forth in the TCEQ, Texas Pollution Discharge Elimination System, Construction General Permit (TPDES, CGP).

There is a high probability that an environmentally sensitive area could be encountered on the Contractor designated Project-Specific Locations (PSL) for this project (haul roads, equipment staging areas, borrow pits, disposal sites, field offices, storage areas, parking areas, etc.). Item 7.6 "Project-Specific Locations", provides a listing of regulatory agencies that may need to be contacted regarding this project.

Contractor questions on this project are to be emailed to the Waco District at the following address:

Bill Compton - Wacoprebid@txdot.gov, 254-867-2770, 100 S. Loop Dr., Waco, TX
 Carmen Chau - Wacoprebid@txdot.gov, 254-867-2794, 100 S. Loop Dr., Waco, TX

Or Via phone or in person to the following individual(s):
 Area Engineer's: Jeff Jackson, P.E., (254) 772-2890
 Assistant Area Engineer's: Mohab Samuel, P.E., (254) 865-1206

Contractor questions will be accepted through email, phone, and in person by the above individuals. Questions may also be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

Paper copies of cross-sections may be produced by using the provided .pdf file located on the above FTP Website at the bidders' expense and at copying companies. This data is for non-construction purposes only and it is the responsibility of the prospective bidder to validate the enclosed data with appropriate plans, specifications and estimate for the project(s).

GENERAL NOTES**ITEM 5: CONTROL OF THE WORK**

Underground utilities owned by the Texas Department of Transportation may be present within the Right-Of-Way on this project. For signal, illumination, surveillance, and communications & control maintained by TxDOT, call the TxDOT Traffic Signal Office (254)867-2808 for locates a minimum of 48 hours in advance of excavation. For irrigation systems, call TxDOT Landscape Office (254)867-2726 for locates a minimum of 48 hours in advance of excavation. If city or town owned irrigation facilities are present, call the appropriate department of the local city or town a minimum of 48 hours in advance of excavation. The Contractor is liable for all damages when utilities are damaged due to Contractor's negligence including, but not limited to, repair or replacement at the Contractor's expense.

UNION PACIFIC RAILROAD COMPANY

Protection of Fiber Optic Cable Systems

Fiber optic cable systems may be buried on the railroad's property. Protection of the fiber optic cable systems is of extreme importance since any break could disrupt service to users resulting in business interruption and loss of revenue and profits. The State and/or its Contractor will telephone the railroad during normal business hours (7:00 A.M. to 9:00 P.M., Central time, Monday through Friday, except holidays) at 1-800-336-9193 (also a 24-hour, seven-day number for emergency calls) to determine if fiber optic cable is buried on the railroad's premises to be used by the State. If it is, the State and/or its Contractor will telephone the telecommunications company(ies) involved, arrange for a cable locator and make arrangements for relocation or other protection of the fiber optic cable prior to beginning any work on the railroad's premises.

BURLINGTON NORTHERN AND SANTA FE RAILWAY COMPANY

Protection of Fiber Optic Cable Systems

The State and/or its Contractor must, five (5) working days before any work is performed, call the railroad's communications network control center at 1-800-533-2891 (a 24-hour number) to assist in determining if fiber optic communications, control systems, or other type of cable systems are buried in the general locations where work is to be performed. In the event such cable is present, the State and/or its Contractor must then call the owner of the cable line to determine its exact location. The Contractor will indemnify and hold harmless the railroad against any cost or claims arising out of damage to any fiber optic communications, control systems or other types of cable systems, but only to the extent such damage is caused by negligence of the Contractor.

Work in this contract is required to be done on railroad property. Cooperate with the railroads and comply with all of their requirements including obtaining any training they require before performing work on railroad property.

ITEM 6: CONTROL OF MATERIALS

Refer to the Buy America Material Classification Sheet for clarification on material categorization.

The Buy America Material Classification Sheet is located at the below link.

<https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html> for clarification on material categorization.

References to manufacturer's trade name or catalog numbers are for the purpose of identification only and the Contractor will be permitted to furnish like materials of other manufacturers provided they are of equal quality and comply with specifications for this project.

ITEM 7: LEGAL RELATIONS AND RESPONSIBILITIES

No significant traffic generator events identified.

If utilizing private property for waste disposal sites, field office sites, equipment storage sites or for any other purpose involved with this project, provide to the Engineer written proof of the property owner's approval of the use of this property. This proof may be in the form of a letter or agreement signed by the property owner or other documents acceptable to the Engineer.

Personal vehicles of the Contractor's employees will not be parked within the right of way at any time including any section closed to public traffic, unless the vehicle is being utilized for construction procedures. However, the Contractor's employees may park on the right of way at the sites where the Contractor has his office, equipment and materials storage yard.

ITEM 8: PROSECUTION AND PROGRESS

This Project will be a Standard Workweek in accordance with Article 8.3.1.4.

The latest roadway-start-work date is May 1, 2024.

Meet weekly or at intervals as agreed upon with the Engineer to notify him or her of planned work for the upcoming 3-week period.

For this project, provide a Bar Chart progress schedule.

ITEM 302: AGGREGATES FOR SURFACE TREATMENTS

The pre-coated aggregate target value of residual bitumen will be in the range of 0.5 % to 1.5 % by weight from a pre-coating material.

Material produced by test method TEX-217-F Part II, passing No. 40 sieve, is restricted to no more than 1% by weight.

The coarse aggregates to be used in surface courses will have a minimum surface aggregate classification requirement of class "B" for all travel lanes and shoulders.

ITEM 316: SEAL COAT

Rates of application and quantities shown on the plans of surface treatment are for estimating purposes only. It will be the Contractor's responsibility to verify all quantities prior to ordering and delivering materials. The asphalt rates will be adjusted as necessary to fit existing field conditions as agreed, upon by the Contractor's designated project superintendent and the Department's designated project manager.

For each project, intersections, ramps, and crossovers will be resurfaced prior to resurfacing the roadway unless otherwise authorized. It is TxDOT's intent to seal from edge of pavement to edge of pavement including all transitions and widenings, regardless of plan width, unless otherwise directed.

Protect all existing bridges, curbs, and other exposed concrete surfaces within the limits of these projects from asphalt materials by any method that is approved. Remove any excessive asphalt materials deposited on these surfaces at the Contractor's expense in a manner approved.

For this contract, wind velocities in excess of 20 mph will be construed as inclement weather and work will be suspended. Wind velocities will be determined at the nearest airport to the area.

All surface material will be broomed using a vacuum broom within city limit sections and a rotary broom in all other sections. Vacuum sweeping will be paid per pertinent bid items.

Stockpile sites for material will be approved and will be located as far as possible from the travel way and in no instance closer than 30 FT measured from pavement edge unless otherwise authorized. They will be kept clear of improved abutting property and, in general, locations at intersections will be avoided in order that sight distance will not be impaired. The Contractor will notify the Engineer at least 5 days prior to stockpiling of

materials closer than 30 FT from the pavement edge provided that adequate barricades and warning signs and devices are provided by the Contractor and approved.

Stockpile sites for material will be leveled and cleared of all vegetation prior to materials being stockpiled. Stockpile sites will be kept clear of debris and vegetative growth in a manner approved.

Stockpile locations will be cleared. Sites will be re-vegetated prior to partial acceptance of individual projects. This work will not be paid for directly, but will be considered subsidiary to the various bid items of the contract.

A water truck will be made available at all times for wetting uncoated aggregate stockpiles as directed. This work will not be paid for directly but will be considered subsidiary to the other contract items.

Repairs to flushing pavement will be made by the Contractor on a new seal coat "Before" going to the next road on the contract. The patching will be completed "Before" leaving each reference.

During application of the surface treatment, if existing conditions warrant, the lane widths, transitions, and intersection areas may be varied as directed.

Use medium pneumatic rollers meeting the requirements of Item 210, "Rolling".

Utilize an asphalt distributor capable of providing a transversely varied asphalt rate. The Engineer will select the pavements where the transversely varied asphalt rate is required.

When a transversely varied rate is required, the asphalt rate outside of the wheel paths will be between 22 and 32% higher than the asphalt rate applied in the wheel paths. Provide calibration documents to the Engineer that include a description of the spray bar(s) and nozzles that will be used and the percentage difference in asphalt rate achieved by each tested spray bar and nozzle arrangement. The nozzles proposed for use will be clearly stamped or marked from the factory identifying the manufacturer.

ITEM 500: MOBILIZATION

Material On Hand (MOH) will not be used in calculating partial payments for Mobilization.

ITEM 502: BARRICADES, SIGNS, AND TRAFFIC HANDLING

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer

and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Install traffic marking signs prior to sealcoat application and remove within three days after placement of traffic markings.

Access will be provided to all business and residences at all times. Where turning radii are limited during phased construction at intersections, provide all weather surfaces such as RAP or base in turning movements to accommodate and to protect the traffic from edge drop-offs. Materials, labor, maintenance and removal for these temporary accesses and radii will not be paid for directly but will be considered subsidiary to the various bid items.

Place barricades and signs in locations that do not obstruct the sight distance of drivers entering the highway from driveways or side streets.

The Contractor Responsible Person(s) (CRP) for Work Zone Traffic Controls will inspect and ensure any deficiencies are corrected each and every day throughout the duration of this contract. Any misaligned or damaged traffic control devices will be repaired as soon as practical after deficiency is discovered.

In addition to providing a Contractor's Responsible Person and a phone number for emergency contact, have an employee(s) available to respond on the project for emergencies and for taking corrective measures within One (1) Hour.

ITEM 506: TEMPORARY EROSION, SEDIMENTATION AND ENVIRONMENTAL CONTROLS

The Storm Water Pollution Prevention Plan (SWP3) consists of temporary erosion control measures needed and provided for under this Item. The disturbed area is less than one acre and use of erosion control measures is not anticipated. If physical conditions encountered at the job site require necessary controls, BMP installation, maintenance, and removal will be paid as extra work on a force account basis per Articles 4.4 and 9.7. Take all practicable precautions to prevent debris from being discharged into the Waters of Texas or a designated wetland. Install Best Management Practices before demolition begins and maintain them during the demolition. Remove any debris or construction material that escapes containment devices and are discharged into the restricted areas before the next rain event or within 24 hours of the discharge.

Cleaning and sweeping of open roadways due to material spillage or loss from Contractor equipment or tires will be the responsibility of the Contractor at no cost to TxDOT. This work will not be charged as Item 738, "Cleaning and Sweeping Highways". Cleaning and sweeping of roadways will be completed as directed, including multiple times per day, if necessary, to maintain acceptable roadways for the traveling public and to meet

environmental regulations. Construction activities will cease when material deposited on the roadway is not properly removed or when equipment is not available as needed. Adequate construction exits will be planned, constructed, and maintained by the Contractor per Item 506, "Temporary Erosion, Sedimentation, and Environmental Controls".

ITEM 662: WORK ZONE PAVEMENT MARKINGS

Paint and beads may be used for non-removable pavement markings.

The Contractor will layout the proposed striping in accordance with TxDOT Traffic Control Plan Standards and latest version Texas Manual on Uniform Traffic Control Devices (TMUTCD) and project striping layout sheets. The Engineer will verify proposed striping layout prior to the beginning of striping operations.

The Contractor will locate the beginning and ending points of No Pass Zones.

ITEM 668: PREFABRICATED PAVEMENT MARKINGS

Use Type C prefabricated pavement markings.

ITEM 672: RAISED PAVEMENT MARKERS

Existing raised pavement markers to be replaced will be removed at the same time that the new markers are placed (i.e., remove and replace in one operation). Existing raised pavement markers replaced by new markers will be removed in accordance with Item 677, "Eliminating Existing Pavement Markings and Markers". Immediately fill the damaged area in the pavement due to the removal of existing markers with an approved bituminous material. This removal and backfill work will not be paid for directly, but will be subsidiary to Item 672, "Raised Pavement Markers".

ITEM 738: CLEANING AND SWEEPING HIGHWAYS

For sweeping operations, a vacuum pickup type broom will be utilized.

Regular sweeping of dirt or mud due to construction operations from the travel ways will not be paid for directly but will be subsidiary to the various bid items.

ITEM 3096: ASPHALTS, OILS, AND EMULSIONS

Latex additives or modifiers will not be allowed on this project.

ITEM 6001: PORTABLE CHANGEABLE MESSAGE SIGN

This project will require "full matrix" type portable changeable message signs.

Ensure that the Contractor's Responsible Person for traffic control can revise messages within thirty (30) minutes of notification.

Supply portable changeable message sign(s) in accordance with the Traffic Control Plan standard sheets and Article 6f.55 of the Texas Manual on Uniform Traffic Control Devices for Streets and Highways Part VI.

ITEM 6185: TRUCK MOUNTED ATTENUATORS

The total number of truck mounted attenuators (TMA) required when utilizing the traffic control standards are shown in the tables below.

TCP 3 Series	Scenario	Required TMA
(3-1)-13	All	2
(3-2)-13	All	3
(3-3)-14	A B D	2
	C	3
(3-4)-13	All	1, unless working inside a twtlt, then 2.
(3-5)-15	All	1

This page is intentionally left blank.

Shadow vehicles equipped for truck mounted attenuators (TMA) for stationary operations will be paid for by the day and must be available for use at any time as determined by the Engineer.

Mobile operations will be paid for by the hour, per specifications. For mobile operations, payment will be made only while the TMA is in use.

For mobile operations requiring multiple TMA's, judgement may be applied in lower speed, urban / in town traffic environments to reduce the numbers of TMA in use where the added TMA may pose a hazard for traffic entering and exiting driveways, side streets, etc.

The Contractor will be responsible for determining if one or more of these operations will be ongoing at the same time to determine the total number of TMA needed for the project for those times per plan requirements. Additional TMAs used that are not specified in the plans in which the Contractor expects compensation will require prior approval from the Engineer.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0833-01-009

DISTRICT Waco

COUNTY Bell, Bosque, Coryell, Falls, Hamilton, Hill, Limestone, McLennan

HIGHWAY FM 1241, FM 1512, FM 1602, FM 1671, FM 2114, FM 215, FM 217, FM 2409, FM 2601, FM 2643, FM 2671, FM 308, FM 342, FM 712, FM 73, FM 934, FM 938, FM 940

CONTROL SECTION JOB				0550-08-014		0673-01-023		0774-05-015		0831-02-022		0833-01-009		0833-02-021	
PROJECT ID				A00135030		A00195866		A00002339		A00135027		A00177163		A00177157	
COUNTY				Hamilton		Limestone		Hamilton		Limestone		Coryell		Bosque	
HIGHWAY				FM 1241		FM 73		FM 1602		FM 342		FM 217		FM 217	
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL
	316-6005	ASPH (TIER II)	GAL	88,785.000		83,000.000		74,147.000		35,553.000		31,515.000		15,706.000	
	316-6398	AGGR (TY-PD GR-4 OR TY-PL GR-4)(SAC-B)	CY	1,645.000		1,538.000		1,374.000		659.000		584.000		291.000	
	500-6001	MOBILIZATION	LS	0.087		0.080		0.075		0.034		0.035		0.016	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO									4.000			
	662-6008	WK ZN PAV MRK NON-REMOV (W)6"(SLD)	LF	116,683.000		110,940.000		118,645.000		46,902.000		61,166.000		29,423.000	
	662-6011	WK ZN PAV MRK NON-REMOV (W)8"(LNDP)	LF												
	662-6012	WK ZN PAV MRK NON-REMOV (W)8"(SLD)	LF												
	662-6016	WK ZN PAV MRK NON-REMOV (W)24"(SLD)	LF	44.000		633.000		178.000		50.000		97.000		13.000	
	662-6035	WK ZN PAV MRK NON-REMOV (Y)6"(BRK)	LF	8,503.000		8,156.000		10,247.000		4,954.000		2,876.000		2,876.000	
	662-6037	WK ZN PAV MRK NON-REMOV (Y)6"(SLD)	LF	105,394.000		65,108.000		81,283.000		18,856.000		11,478.000		11,478.000	
	662-6111	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	EA	14,532.000		12,328.000		11,960.000		5,212.000		6,168.000		2,996.000	
	668-6077	PREFAB PAV MRK TY C (W) (ARROW)	EA												
	668-6085	PREFAB PAV MRK TY C (W) (WORD)	EA					6.000				2.000			
	668-6089	PREFAB PAV MRK TY C (W) (RR XING)	EA												
	668-6091	PREFAB PAV MRK TY C (W) (18")(YLD TRI)	EA												
	668-6092	PREFAB PAV MRK TY C (W) (36")(YLD TRI)	EA									10.000			
	672-6007	REFL PAV MRKR TY I-C	EA												
	672-6009	REFL PAV MRKR TY II-A-A	EA	1,767.000		1,303.000		2,380.000		534.000		745.000		272.000	
	738-6009	CLEANING / SWEEPING (AGGREGATE REMOVAL)	MI	13.758		11.673		11.325		4.935		5.839		2.836	
	6001-6001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	8.000		8.000		8.000		8.000		8.000		8.000	
	6056-6001	PREFORMED IN-LANE(TRANS) RUMBLE STRIP	LF					80.000				80.000			
	6185-6003	TMA (MOBILE OPERATION)	HR	40.000		40.000		40.000		40.000		40.000		40.000	
	02	RAILROAD FLAGGING: RAILROAD FORCE ACCOUNT WORK (NON PARTICIPATING)	LS									1.000			
	18	EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS									1.000			
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS									1.000			



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0833-01-009

DISTRICT Waco

COUNTY Bell, Bosque, Coryell, Falls, Hamilton, Hill, Limestone, McLennan

HIGHWAY FM 1241, FM 1512, FM 1602, FM 1671, FM 2114, FM 215, FM 217, FM 2409, FM 2601, FM 2643, FM 2671, FM 308, FM 342, FM 712, FM 73, FM 934, FM 938, FM 940

CONTROL SECTION JOB				0834-02-030		0834-03-026		0888-01-022		1078-01-009		1187-02-019		1458-02-011	
PROJECT ID				A00129414		A00129415		A00129520		A00195864		A00135074		A00135073	
COUNTY				Hill		Hill		Hill		Falls		McLennan		Limestone	
HIGHWAY				FM 308		FM 308		FM 934		FM 2643		FM 938		FM 1512	
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL
	316-6005	ASPH (TIER II)	GAL	72,042.000		75,585.000		32,317.000		22,213.000		35,671.000		27,138.000	
	316-6398	AGGR (TY-PD GR-4 OR TY-PL GR-4)(SAC-B)	CY	1,335.000		1,400.000		599.000		412.000		661.000		503.000	
	500-6001	MOBILIZATION	LS	0.070		0.072		0.030		0.021		0.032		0.028	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO												
	662-6008	WK ZN PAV MRK NON-REMOV (W)6"(SLD)	LF	107,402.000		89,209.000		29,750.000						37,512.000	
	662-6011	WK ZN PAV MRK NON-REMOV (W)8"(LNDP)	LF												
	662-6012	WK ZN PAV MRK NON-REMOV (W)8"(SLD)	LF												
	662-6016	WK ZN PAV MRK NON-REMOV (W)24"(SLD)	LF	351.000		509.000		58.000		138.000		42.000		162.000	
	662-6035	WK ZN PAV MRK NON-REMOV (Y)6"(BRK)	LF	8,062.000		11,067.000		5,507.000		2,230.000		5,406.000		1,250.000	
	662-6037	WK ZN PAV MRK NON-REMOV (Y)6"(SLD)	LF	61,918.000		47,778.000		23,478.000		28,826.000		28,278.000		35,843.000	
	662-6111	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	EA	10,880.000		11,116.000		5,216.000		2,236.000		6,296.000		4,172.000	
	668-6077	PREFAB PAV MRK TY C (W) (ARROW)	EA												
	668-6085	PREFAB PAV MRK TY C (W) (WORD)	EA					2.000						2.000	
	668-6089	PREFAB PAV MRK TY C (W) (RR XING)	EA					1.000							
	668-6091	PREFAB PAV MRK TY C (W) (18")(YLD TRI)	EA												
	668-6092	PREFAB PAV MRK TY C (W) (36")(YLD TRI)	EA												
	672-6007	REFL PAV MRKR TY I-C	EA												
	672-6009	REFL PAV MRKR TY II-A-A	EA	1,236.000		1,188.000		551.000		453.000		700.000		497.000	
	738-6009	CLEANING / SWEEPING (AGGREGATE REMOVAL)	MI	10.302		10.526		4.936		4.241		5.961		3.947	
	6001-6001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	8.000		8.000		8.000		8.000		8.000		8.000	
	6056-6001	PREFORMED IN-LANE(TRANS) RUMBLE STRIP	LF					80.000							
	6185-6003	TMA (MOBILE OPERATION)	HR	40.000		40.000		40.000		40.000		40.000		40.000	
	02	RAILROAD FLAGGING: RAILROAD FORCE ACCOUNT WORK (NON PARTICIPATING)	LS												
	18	EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS												
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS												



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0833-01-009

DISTRICT Waco

COUNTY Bell, Bosque, Coryell, Falls, Hamilton, Hill, Limestone, McLennan

HIGHWAY FM 1241, FM 1512, FM 1602, FM 1671, FM 2114, FM 215, FM 217, FM 2409, FM 2601, FM 2643, FM 2671, FM 308, FM 342, FM 712, FM 73, FM 934, FM 938, FM 940

CONTROL SECTION JOB				1656-01-014		1656-02-017		2138-01-014		2303-02-010		2305-02-018		2504-01-008	
PROJECT ID				A00135047		A00135068		A00177168		A00134091		A00187324		A00134075	
COUNTY				Bell		Falls		Coryell		Bell		Hill		Bell	
HIGHWAY				FM 1671		FM 1671		FM 217		FM 2409		FM 2114		FM 940	
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL
	316-6005	ASPH (TIER II)	GAL	8,425.000		41,302.000		52,983.000		36,463.000		23,312.000		28,810.000	
	316-6398	AGGR (TY-PD GR-4 OR TY-PL GR-4)(SAC-B)	CY	157.000		765.000		982.000		676.000		432.000		534.000	
	500-6001	MOBILIZATION	LS	0.009		0.041		0.053		0.038		0.023		0.030	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO												
	662-6008	WK ZN PAV MRK NON-REMOV (W)6"(SLD)	LF	11,958.000		69,614.000		78,015.000		69,786.000		28,337.000		52,788.000	
	662-6011	WK ZN PAV MRK NON-REMOV (W)8"(LNDP)	LF												
	662-6012	WK ZN PAV MRK NON-REMOV (W)8"(SLD)	LF									395.000		132.000	
	662-6016	WK ZN PAV MRK NON-REMOV (W)24"(SLD)	LF	38.000		42.000		177.000		156.000		168.000		100.000	
	662-6035	WK ZN PAV MRK NON-REMOV (Y)6"(BRK)	LF	1,360.000		5,256.000		7,923.000		3,693.000		2,305.000		4,727.000	
	662-6037	WK ZN PAV MRK NON-REMOV (Y)6"(SLD)	LF	4,417.000		27,615.000		46,419.000		37,102.000		11,678.000		23,028.000	
	662-6111	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	EA	1,180.000		6,260.000		9,616.000		5,720.000		2,776.000		5,292.000	
	668-6077	PREFAB PAV MRK TY C (W) (ARROW)	EA									1.000			
	668-6085	PREFAB PAV MRK TY C (W) (WORD)	EA							2.000		3.000		4.000	
	668-6089	PREFAB PAV MRK TY C (W) (RR XING)	EA									1.000			
	668-6091	PREFAB PAV MRK TY C (W) (18")(YLD TRI)	EA									8.000			
	668-6092	PREFAB PAV MRK TY C (W) (36")(YLD TRI)	EA							13.000		3.000		7.000	
	672-6007	REFL PAV MRKR TY I-C	EA					31.000				11.000			
	672-6009	REFL PAV MRKR TY II-A-A	EA	127.000		666.000		1,133.000		653.000		259.000		418.000	
	738-6009	CLEANING / SWEEPING (AGGREGATE REMOVAL)	MI	1.115		5.926		9.104		5.414		2.628		5.011	
	6001-6001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	8.000		8.000		8.000		8.000		8.000		8.000	
	6056-6001	PREFORMED IN-LANE(TRANS) RUMBLE STRIP	LF									80.000			
	6185-6003	TMA (MOBILE OPERATION)	HR	40.000		40.000		40.000		40.000		40.000		40.000	
	02	RAILROAD FLAGGING: RAILROAD FORCE ACCOUNT WORK (NON PARTICIPATING)	LS												
	18	EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS												
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS												



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0833-01-009

DISTRICT Waco

COUNTY Bell, Bosque, Coryell, Falls, Hamilton, Hill, Limestone, McLennan

HIGHWAY FM 1241, FM 1512, FM 1602, FM 1671, FM 2114, FM 215, FM 217, FM 2409, FM 2601, FM 2643, FM 2671, FM 308, FM 342, FM 712, FM 73, FM 934, FM 938, FM 940

CONTROL SECTION JOB				2602-02-013		2634-01-019		2674-02-012		2871-01-016		2871-02-008		3079-02-005	
PROJECT ID				A00135066		A00195865		A00177875		A00177169		A00177159		A00195867	
COUNTY				Bell		Falls		McLennan		Coryell		Bosque		Limestone	
HIGHWAY				FM 2601		FM 712		FM 2671		FM 215		FM 215		FM 73	
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL	EST.	FINAL
	316-6005	ASPH (TIER II)	GAL	37,888.000		59,959.000		29,146.000		71,636.000		12,263.000		15,834.000	
	316-6398	AGGR (TY-PD GR-4 OR TY-PL GR-4)(SAC-B)	CY	702.000		1,111.000		540.000		1,327.000		228.000		294.000	
	500-6001	MOBILIZATION	LS	0.037		0.056		0.031		0.072		0.013		0.017	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO												
	662-6008	WK ZN PAV MRK NON-REMOV (W)6"(SLD)	LF	59,084.000		58,074.000		52,073.000		121,042.000		19,689.000		25,147.000	
	662-6011	WK ZN PAV MRK NON-REMOV (W)8"(LNDP)	LF							115.000					
	662-6012	WK ZN PAV MRK NON-REMOV (W)8"(SLD)	LF			725.000				148.000					
	662-6016	WK ZN PAV MRK NON-REMOV (W)24"(SLD)	LF	115.000		137.000		25.000		204.000		62.000		15.000	
	662-6035	WK ZN PAV MRK NON-REMOV (Y)6"(BRK)	LF	6,160.000		6,310.000		5,443.000		9,308.000		2,178.000		582.000	
	662-6037	WK ZN PAV MRK NON-REMOV (Y)6"(SLD)	LF	27,207.000		58,074.000		35,666.000		74,120.000		9,548.000		25,387.000	
	662-6111	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	EA	6,001.000		2,962.000		5,248.000		12,544.000		2,200.000		2,796.000	
	668-6077	PREFAB PAV MRK TY C (W) (ARROW)	EA							2.000					
	668-6085	PREFAB PAV MRK TY C (W) (WORD)	EA							2.000					
	668-6089	PREFAB PAV MRK TY C (W) (RR XING)	EA			2.000		2.000							
	668-6091	PREFAB PAV MRK TY C (W) (18")(YLD TRI)	EA												
	668-6092	PREFAB PAV MRK TY C (W) (36")(YLD TRI)	EA	10.000											
	672-6007	REFL PAV MRKR TY I-C	EA							13.000					
	672-6009	REFL PAV MRKR TY II-A-A	EA	613.000		509.000		516.000		1,497.000		256.000		348.000	
	738-6009	CLEANING / SWEEPING (AGGREGATE REMOVAL)	MI	5.685		5.591		4.968		11.878		2.082		2.646	
	6001-6001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	8.000		8.000		8.000		8.000		8.000		8.000	
	6056-6001	PREFORMED IN-LANE(TRANS) RUMBLE STRIP	LF												
	6185-6003	TMA (MOBILE OPERATION)	HR	40.000		40.000		40.000		40.000		40.000		40.000	
	02	RAILROAD FLAGGING: RAILROAD FORCE ACCOUNT WORK (NON PARTICIPATING)	LS												
	18	EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS												
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS												



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0833-01-009

DISTRICT Waco

COUNTY Bell, Bosque, Coryell, Falls, Hamilton, Hill, Limestone, McLennan

HIGHWAY FM 1241, FM 1512, FM 1602, FM 1671, FM 2114, FM 215, FM 217, FM 2409, FM 2601, FM 2643, FM 2671, FM 308, FM 342, FM 712, FM 73, FM 934, FM 938, FM 940

CONTROL SECTION JOB				TOTAL EST.	TOTAL FINAL
PROJECT ID					
COUNTY					
HIGHWAY					
ALT	BID CODE	DESCRIPTION	UNIT		
	316-6005	ASPH (TIER II)	GAL	1,011,693.000	
	316-6398	AGGR (TY-PD GR-4 OR TY-PL GR-4)(SAC-B)	CY	18,749.000	
	500-6001	MOBILIZATION	LS	1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	4.000	
	662-6008	WK ZN PAV MRK NON-REMOV (W)6"(SLD)	LF	1,393,239.000	
	662-6011	WK ZN PAV MRK NON-REMOV (W)8"(LNDP)	LF	115.000	
	662-6012	WK ZN PAV MRK NON-REMOV (W)8"(SLD)	LF	1,400.000	
	662-6016	WK ZN PAV MRK NON-REMOV (W)24"(SLD)	LF	3,514.000	
	662-6035	WK ZN PAV MRK NON-REMOV (Y)6"(BRK)	LF	126,379.000	
	662-6037	WK ZN PAV MRK NON-REMOV (Y)6"(SLD)	LF	899,979.000	
	662-6111	WK ZN PAV MRK SHT TERM (TAB)TY Y-2	EA	155,707.000	
	668-6077	PREFAB PAV MRK TY C (W) (ARROW)	EA	3.000	
	668-6085	PREFAB PAV MRK TY C (W) (WORD)	EA	23.000	
	668-6089	PREFAB PAV MRK TY C (W) (RR XING)	EA	6.000	
	668-6091	PREFAB PAV MRK TY C (W) (18")(YLD TRI)	EA	8.000	
	668-6092	PREFAB PAV MRK TY C (W) (36")(YLD TRI)	EA	43.000	
	672-6007	REFL PAV MRKR TY I-C	EA	55.000	
	672-6009	REFL PAV MRKR TY II-A-A	EA	18,621.000	
	738-6009	CLEANING / SWEEPING (AGGREGATE REMOVAL)	MI	152.327	
	6001-6001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	192.000	
	6056-6001	PREFORMED IN-LANE(TRANS) RUMBLE STRIP	LF	320.000	
	6185-6003	TMA (MOBILE OPERATION)	HR	960.000	
	02	RAILROAD FLAGGING: RAILROAD FORCE ACCOUNT WORK (NON PARTICIPATING)	LS	1.000	
	18	EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS	1.000	
		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000	

DISTRICT	COUNTY	CCSJ	SHEET
Waco	Coryell	0833-01-009	12D

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:29:48 AM
 FILE: c:\txdot\pww\online\txdot3\mogat00g_babiker\00534899\sctable.dgn

SEAL COAT MATERIAL SELECTION TABLE		
TIER I: HEAVY USE - USE ONLY THE SELECTED MATERIALS.		
TYPE	ASPHALT RUBBER (A-R) <input type="checkbox"/> A-R ONLY	ASPHALT CEMENT (AC) <input checked="" type="checkbox"/> AC ONLY
ASPHALT	<input type="checkbox"/> A-R TY II <input type="checkbox"/> A-R TY III <input type="checkbox"/> SP 300-	<input checked="" type="checkbox"/> AC-20-5TR <input type="checkbox"/> AC-20XP <input type="checkbox"/> AC-15P <input type="checkbox"/> SP 300-
TIER II: MODERATE USE - USE THESE MATERIALS OR ANY SELECTED TIER I MATERIAL COMBINATIONS OF THE ALLOWED TYPES.		
TYPE	ASPHALT CEMENT (AC) <input checked="" type="checkbox"/> AC ONLY	ASPHALT EMULSION <input type="checkbox"/> EMULSION ONLY
ASPHALT	<input checked="" type="checkbox"/> AC-10-2TR <input type="checkbox"/> AC-15P <input checked="" type="checkbox"/> AC-20XP <input type="checkbox"/> AC-10 W/2%SBR <input type="checkbox"/> AC-5 W/2%SBR <input type="checkbox"/> SP 300-	<input type="checkbox"/> CHFRS-2P <input type="checkbox"/> HFRS-2P <input type="checkbox"/> CRS-2P <input type="checkbox"/> SP 300-
TIER III: LIGHT USE - USE THESE MATERIALS OR ANY SELECTED TIER I OR TIER II MATERIAL COMBINATIONS OF THE ALLOWED TYPES.		
TYPE	ASPHALT CEMENT (AC) <input type="checkbox"/> AC ONLY	ASPHALT EMULSION <input type="checkbox"/> EMULSION ONLY
ASPHALT	<input type="checkbox"/> AC-10 <input type="checkbox"/> AC-5 <input type="checkbox"/> SP 300-	<input type="checkbox"/> CRS-2 <input type="checkbox"/> CRS-2H <input type="checkbox"/> HFRS-2 <input type="checkbox"/> SP 300-
DISTRICTWIDE SEAL COAT PROJECT SEASONS; REFER TO ITEM 316 FOR TEMPERATURE AND WEATHER RESTRICTIONS.		
SEASON 1:	AMA, CHS, LBB	MAY 15 TO AUG 31
SEASON 2:	ABL, ATL, BWD, DAL, FTW, LFK, ODA, PAR, SJT, TYL, WAC, WFS	MAY 1 TO AUG 31
SEASON 3:	AUS, BMT, BRY, ELP, HOU, SAT, YKM	MAY 1 TO SEP 15
SEASON 4:	CRP, LRD, PHR	APR 1 TO SEPT 30
NOTE: SEAL COATS ON ROUTINE MAINTENANCE CONTRACTS MUST BE COMPLETED BY AUGUST 31 UNLESS OTHERWISE SHOWN ON THE PLANS.		

INSTRUCTIONS TO THE CONTRACTOR:

1. PROVIDE MATERIALS ACCORDING TO THE ALTERNATES SELECTED FOR THE ROADWAY TIER DESIGNATIONS SPECIFIED AT VARIOUS ROADWAY LOCATIONS SHOWN ON THE PLANS;
2. ALTERNATELY, SUPPLY SELECTED BINDERS FROM A HIGHER TIER, BUT ONLY IF THE TYPE OF MATERIAL IS ALLOWED FOR THE DESIGNATED TIER; PAYMENT WILL ONLY BE MADE FOR THE TIER DESIGNATED FOR THE PAVEMENT;
3. SUPPLY THE AGGREGATE TYPE, GRADE AND SURFACE AGGREGATE CLASS SHOWN ON THE PLANS; AND
4. ADHERE TO THE APPLICATION SEASON SELECTED.


THERE ARE 60 WORKING DAYS ALLOWED FOR THIS PROJECT.
 THE LATEST ROADWAY START WORK DATE IS MAY 1st .



Brian W. Lamb P.E.
 SIGNATURE OF REGISTRANT 7/6/2023
 & DATE

SEAL COAT MATERIAL SELECTION TABLE				
SCTABLE				
FILE: sctable.dgn	DN: TxDOT	CK:	DW:	CK:
© TxDOT: March 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
	DIST	COUNTY	SHEET NO.	
	WACO	Coryell, etc	13	

BELL COUNTY															
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
								MILES	FT	FT	SY	SY	SY	ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
1	BELL	FM 2409	2303-02-010	SH 36	FM 2601	0+00.00	285+85.92	5.414	28585.92	28.70	91,157	1,780	92,937	36,463	676
2	BELL	FM 940	2504-01-008	FM 437	FM 485	0+00.00	264+58.08	5.011	26458.08	24.50	72,025	1,158	73,184	28,810	534
3	BELL	FM 2601	2602-02-013	SH 317	Deadend	0+00.00	300+16.80	5.685	30016.8	28.40	94,720	2,301	97,021	37,888	702
4	BELL	FM 1671	1656-01-014	FM 485	Falls C/L	0+00.00	58+87.20	1.115	5887.2	32.20	21,063	143	21,206	8,425	157
PROJECT TOTAL:								17.225	90,948.00		278,965	5,383	284,348	111,586	2,069



© 2023
Texas Department of Transportation

CONSOLIDATED SUMMARIES

BELL COUNTY

SHEET 1 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		14

BOSQUE COUNTY															
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
														ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
								MILES	FT	FT	SY	SY	SY	GAL	CY
5	BOSQUE	FM 217	0833-02-021	FM 215	Coryell C/L	0+00.00	149+74.08	2.836	14974.08	23.60	39,265	120	39,385	15,706	291
6	BOSQUE	FM 215	2871-02-008	FM 217	Coryell C/L	0+00.00	109+92.96	2.082	10992.96	25.10	30,658	516	31,174	12,263	228
PROJECT TOTAL								4.918	25,967.04		69,923	636	70,559	27,969	519




CONSOLIDATED SUMMARIES BOSQUE COUNTY

SHEET 2 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		15

CORYELL COUNTY															
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
														ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
								MILES	FT	FT	SY	SY	SY	GAL	CY
7	CORYELL	FM 217	0833-01-009	Bosque C/L	FM 182	0+00.00	308+29.92	5.839	30829.92	23.00	78,788	603	79,391	31,515	584
8	CORYELL	FM 217	2138-01-014	FM 182	SH 36	0+00.00	480+69.12	9.104	48069.12	24.80	132,457	2,044	134,501	52,983	982
9	CORYELL	FM 215	2871-01-016	Bosque C/L	SH 36	0+00.00	627+15.84	11.878	62715.84	25.70	179,089	3,427	182,517	71,636	1,327
PROJECT TOTAL								26.821	141,614.88		390,334	6,074	396,408	156,134	2,893



© 2023
Texas Department of Transportation

CONSOLIDATED SUMMARIES

CORYELL COUNTY

SHEET 3 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		16

FALLS COUNTY															
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
								MILES	FT	FT	SY	SY	SY	ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
10	FALLS	FM 1671	1656-02-017	Bell C/L	FM 1963	0+00.00	312+89.28	5.926	31289.28	29.70	103,255	681	103,936	41,302	765
11	FALLS	FM 2643	1078-01-009	McLennan C/L	SH7	0+00.00	223+92.48	4.241	22392.48	22.32	55,533	1,737	57,270	22,213	412
12	FALLS	FM 712	2634-01-019	BU6	FM 2027	0+00.00	295+20.48	5.591	29520.48	45.70	149,898	1,158	151,056	59,959	1,111
PROJECT TOTAL								15.758	83,202.24		308,686	3,577	312,263	123,474	2,288




CONSOLIDATED SUMMARIES FALLS COUNTY

SHEET 4 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		17

HAMILTON COUNTY															
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
								MILES	FT	FT	SY	SY	SY	ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
13	HAMILTON	FM 1241	0550-08-014	FM 932	Coryell C/L	0+00.00	726+42.24	13.758	72642.24	27.50	221,962	2,815	224,777	88,785	1,645
14	HAMILTON	FM 1602	0774-05-015	SH 22	SH 36	0+00.00	597+96.00	11.325	59796.00	27.90	185,368	2,217	187,585	74,147	1,374
PROJECT TOTAL								25.083	132,438.24		407,330	5,032	412,362	162,932	3,019



© 2023
Texas Department of Transportation

CONSOLIDATED SUMMARIES

HAMILTON COUNTY

SHEET 5 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		18

HILL COUNTY															
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
														ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
								MILES	FT	FT	SY	SY	SY	GAL	CY
15	HILL	FM 308	0834-02-030	SH 171	SH 22	0+00.00	543+94.56	10.302	54394.56	29.80	180,106	2,822	182,928	72,042	1,335
16	HILL	FM 308	0834-03-026	McLennan C/L	SH 171	0+00.00	555+77.28	10.526	55577.28	30.60	188,963	6,585	195,548	75,585	1,400
17	HILL	FM 934	0888-01-022	SH 171	FM 66	0+00.00	260+62.08	4.936	26062.08	27.90	80,792	1,313	82,105	32,317	599
18	HILL	FM 2114	2305-02-018	McLennan C/L	FM 933	0+00.00	138+75.84	2.628	13875.84	37.80	58,279	2,296	60,575	23,312	432
PROJECT TOTAL								28.392	149,909.76		508,140	13,016	521,156	203,256	3,906



CONSOLIDATED SUMMARIES HILL COUNTY

SHEET 6 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		19

LIMESTONE COUNTY																
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398	
														ASPH (TIER 11)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)	
								MILES	FT	FT	SY	SY	SY	GAL	CY	
19	LIMESTONE	FM 1512	1458-02-011	FM 39	LEON C/L	0+00.00	208+40.16	3.947	20840.16	29.30	67,846	1,264	69,110	27,138	503	
20	LIMESTONE	FM 342	0831-02-022	McLennan C/L	FM 339	0+00.00	260+56.80	4.935	26056.8	30.70	88,883	154	89,037	35,553	659	
21	LIMESTONE	FM 73	0673-01-023	US 84	SH 171	0+00.00	616+33.44	11.673	61633.44	30.30	207,499	5,179	212,678	83,000	1,538	
22	LIMESTONE	FM 73	3079-02-005	SH 171	End of Maint	0+00.00	139+70.88	2.646	13970.88	25.50	39,584	166	39,750	15,834	294	
PROJECT TOTAL								23.201	122,501.28		403,812	6,763	410,575	161,525	2,994	



CONSOLIDATED SUMMARIES LIMESTONE COUNTY

SHEET 7 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		20

MCLENNAN COUNTY															
REF. NO	COUNTY	HIGHWAY	CSJ	LIMIT FROM	LIMIT TO	ASSUMED BEGIN STA	ASSUMED END STA	LENGTH	LENGTH	WIDTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
														ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
								MILES	FT	FT	SY	SY	SY	GAL	CY
23	MCLENNAN	FM 2671	2674-02-012	Coryell C/L	SH 317	0+00.00	262+31.04	4.968	26231.04	25.00	72,864	2,301	75,165	29,146	540
24	MCLENNAN	FM 938	1187-02-019	US 84	FM 185	0+00.00	314+74.08	5.961	31474.08	25.50	89,177	1,147	90,324	35,671	661
PROJECT TOTAL								10.929	57,705.12		162,041	3,448	165,489	64,817	1,201




CONSOLIDATED SUMMARIES MCLENNAN COUNTY

SHEET 8 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		21

REF. NO	COUNTY	HIGHWAY	CSJ	0662 6008	0662 6011	0662 6012	0662 6016	0662 6035	0662 6037	0662 6111	6056 6001	
				WK ZN PAV MRK NON-REMOV (W) 6" (SLD)	WK ZN PAV MRK NON-REMOV (W) 8" (LNDP)	WK ZN PAV MRK NON-REMOV (W) 8" (SLD)	WK ZN PAV MRK NON-REMOV (W) 24" (SLD)	WK ZN PAV MRK NON-REMOV (Y) 6" (BRK)	WK ZN PAV MRK NON-REMOV (Y) 6" (SLD)	WK ZN PAV MRK SHT TERM (TAB) TY Y-2	PREFORMED IN-LANE (T RANS) RUMBLE STRIP	
				LF	LF	LF	LF	LF	LF	EA	LF	
1	BELL	FM 2409	2303-02-010	69786			156	3693	37102	5720		
2	BELL	FM 940	2504-01-008	52788		132	100	4727	23028	5292		
3	BELL	FM 2601	2602-02-013	59084			115	6160	27207	6004		
4	BELL	FM 1671	1656-01-014	11958			38	1360	4417	1,180		
5	BOSQUE	FM 217	0833-02-021	29423			13	2876	11478	2996		
6	BOSQUE	FM 215	2871-02-008	19689			62	2178	9548	2,200		
7	CORYELL	FM 217	0833-01-009	61166			97	3575	46165	6168	80	
8	CORYELL	FM 217	2138-01-014	78015			177	7923	46419	9616		
9	CORYELL	FM 215	2871-01-016	121042	115	148	204	9308	74120	12,544		
10	FALLS	FM 1671	1656-02-017	69614			42	5256	27615	6260		
11	FALLS	FM 2643	1078-01-009				138	2230	28826	2,236		
12	FALLS	FM 712	2634-01-019	58074		725	137	6310	58074	2962		
13	HAMILTON	FM 1241	0550-08-014	116683			44	8503	105394	14,532		
14	HAMILTON	FM 1602	0774-05-015	118645			178	10247	81283	11960	80	
15	HILL	FM 308	0834-02-030	107402			351	8062	61918	10880		
16	HILL	FM 308	0834-03-026	89209			509	11067	47778	11116	80	
17	HILL	FM 934	0888-01-022	29750			58	5507	23478	5,216	80	
18	HILL	FM 2114	2305-02-018	28337		395	168	2305	11678	2776		
19	LIMSTONE	FM 1512	1458-02-011	37,512			162	1250	35843	4,172		
20	LIMSTONE	FM 342	0831-02-022	46,902			50	4954	18856	5212		
21	LIMSTONE	FM 73	0673-01-023	110,674			633	8156	65108	12328		
22	LIMSTONE	FM 73	3079-02-005	25,147			15	582	25387	2796		
23	MCLENNAN	FM 2671	2674-02-012	52073			25	5443	35666	5248		
24	MCLENNAN	FM 938	1187-02-019				42	5406	28278	6296		
PROJECT TOTAL				1,392,973	115	1,400	3,514	127,078	934,666	155,710	320	

REF. NO	COUNTY	HIGHWAY	CSJ	0668 6077	0668 6085	0668 6089	0668 6091	0668 6092	0672 6007	0672 6009	0738 6009	6001 6001	6185 6003
				PREFAB PAV MRK TY C (W) (ARROW)	PREFAB PAV MRK TY C (W) (WORD)	PREFAB PAV MRK TY C (W) (RR XING)	PREFAB PAV MRK TY C (W) (18") (YLD TRI)	PREFAB PAV MRK TY C (W) (36") (YLD TRI)	REFL PAV MRKR TY 1-C	REFL PAV MRKR TY II-A-A	CLEANING / SWEEPING (AGGREGATE REMOVAL)	PORTABLE CHANGEABLE MESSAGE SIGN	TMA (MOBILE OPERATION)
				EA	EA	EA	EA	EA	EA	EA	MI	DAY	HR
1	BELL	FM 2409	2303-02-010		2			13		653	5.414	8	40
2	BELL	FM 940	2504-01-008		4			7		418	5.011	8	40
3	BELL	FM 2601	2602-02-013					10		613	5.685	8	40
4	BELL	FM 1671	1656-01-014							127	1.115	8	40
5	BOSQUE	FM 217	0833-02-021							272	2.836	8	40
6	BOSQUE	FM 215	2871-02-008							256	2.082	8	40
7	CORYELL	FM 217	0833-01-009		2			10		745	5.839	8	40
8	CORYELL	FM 217	2138-01-014						31	1133	9.104	8	40
9	CORYELL	FM 215	2871-01-016	2	2				13	1497	11.878	8	40
10	FALLS	FM 1671	1656-02-017							666	5.926	8	40
11	FALLS	FM 2643	1078-01-009							453	4.241	8	40
12	FALLS	FM 712	2634-01-019			2				509	5.591	8	40
13	HAMILTON	FM 1241	0550-08-014							1767	13.758	8	40
14	HAMILTON	FM 1602	0774-05-015		6					2380	11.325	8	40
15	HILL	FM 308	0834-02-030							1236	10.302	8	40
16	HILL	FM 308	0834-03-026							1188	10.526	8	40
17	HILL	FM 934	0888-01-022		2	1				551	4.936	8	40
18	HILL	FM 2114	2305-02-018	1	1		8	3	11	259	2.628	8	40
19	LIMSTONE	FM 1512	1458-02-011		2					497	3.947	8	40
20	LIMSTONE	FM 342	0831-02-022							534	4.935	8	40
21	LIMSTONE	FM 73	0673-01-023							1303	11.673	8	40
22	LIMSTONE	FM 73	3079-02-005							348	2.646	8	40
23	MCLENNAN	FM 2671	2674-02-012			2				516	4.968	8	40
24	MCLENNAN	FM 938	1187-02-019							700	5.961	8	40
PROJECT TOTAL				3	21	5	8	43	55	18,621	152.327	192	960



© 2023
Texas Department of Transportation

CONSOLIDATED SUMMARIES PAVEMENT MARKINGS

SHEET 10 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		22

COUNTY TOTALS								
COUNTY	HIGHWAY	LENGTH	LENGTH	RDWAY AREA	INTER-SECTION AREA	TOTAL AREA	0316 6005	0316 6398
							ASPH (TIER II)	AGGR (TY-PD GR-4 OR TY-PL GR-4) (SAC-B)
		MILES	FT	SY	SY	SY	GAL	CY
BELL	SHEET 1 OF 10	17.225	90,948.00	278,965	5,383	284,348	111,586	2,069
BOSQUE	SHEET 2 OF 10	4.918	25,967.04	69,923	636	70,559	27,969	519
CORYELL	SHEET 3 OF 10	26.821	141,614.88	390,334	6,074	396,408	156,134	2,893
FALLS	SHEET 4 OF 10	15.758	83,202.24	308,686	3,577	312,263	123,474	2,288
HAMILTON	SHEET 5 OF 10	25.083	132,438.24	407,330	5,032	412,362	162,932	3,019
HILL	SHEET 6 OF 10	28.392	149,909.76	508,140	13,016	521,156	203,256	3,766
LIMESTONE	SHEET 7 OF 10	23.201	122,501.28	403,812	6,763	410,575	161,525	2,994
MCLENNAN	SHEET 8 OF 10	10.929	57,705.12	162,041	3,448	165,489	64,817	1,201
PROJECT TOTAL				2,529,231	43,928	2,573,159	1,011,693	18,749



CONSOLIDATED SUMMARIES COUNTY TOTALS

SHEET 9 OF 10

CHANGE ORDER	FED. RD. DIV. NO.	CONT	SECT	JOB	HIGHWAY
	6	0833	01	009, etc.	FM 217, etc
	STATE	DIST	COUNTY		SHEET NO.
	TEXAS	WACO	Coryell, etc		23

PART 1 - GENERAL

1.01 DESCRIPTION

This project includes construction work within the right of way and/or properties of the Railroad and adjacent to its tracks, wire lines and other facilities. These sheets describe the minimum special requirements for coordination with the Railroad when working upon, over or under Railroad Right of Way or when impacting current or future Railroad operations. Coordinate with the Railroad while performing the work outlined herein, and afford the same cooperation with the Railroad as with TxDOT. Complete all submittals and work in accordance with TxDOT Standard Specifications, Railroad Guidelines and AREMA recommendations as modified by these minimum special requirements or as directed in writing by the Railroad Designated Representative.

For purposes of this project, the Railroad Designated Representative is the person or persons designated by the Railroad Manager of Industry and Public Projects to handle specific tasks related to the project.

1.02 REQUEST FOR INFORMATION / CLARIFICATION

Submit Requests for Information ("RFI") involving work within any Railroad Right of Way to the TxDOT Engineer. The TxDOT Engineer will submit the RFI to the Railroad Designated Representative for review and approval for RFI's corresponding to work within Railroad Right of Way. Allow six (6) weeks total time for review and approval, which includes four (4) weeks for review and approval by the Railroad.

1.03 PLANS / SPECIFICATIONS

TxDOT has received written Railroad approval of the plans and specifications for this project. Any revisions or changes in the plans after award of the Contract must have the approval of TxDOT and the Railroad.

PART 2 - UTILITIES AND FIBER OPTIC

Construct all utility installations in accordance with current AREMA recommendations, Railroad, TxDOT and owning utility specifications and requirements. Railroad general guidelines can be found on the Railroad website or by contacting the Railroad Designated Representative.

PART 3 - CONSTRUCTION

3.01 GENERAL

- A. Perform all work in compliance with all applicable Railroad, Federal Railroad Administration (FRA), and TxDOT rules and regulations. Arrange and conduct work in a manner that does not endanger or interfere with the safe operation of the tracks and property of the Railroad and the traffic moving on such tracks, or the wires, signals and other property of the Railroad, its tenants or licensees, at or in the vicinity of the Work. The safe operation of railroad train movements takes precedence over any work to be performed by the Contractor. The Contractor is responsible for train delay cost and lost revenue claims due to any delays or interruption of train operations resulting from Contractor's construction or other activities.
- B. Construction activities within 15 feet of the operational tracks will only be allowed if absolutely necessary and the Railroad's Designated Representative grants approval. Construction activities within 15 feet of the operational track(s) preferably allow the tracks to stay operational. In such cases, coordination and approval by the Railroad Track Manager is required with regard to schedule, flagging, and slow orders. See Sections 3.07 and 3.08 for additional information.
- C. Provide track protection for all work equipment (including rubber tired equipment) operating within 25 feet from nearest rail. When not in use, keep Contractor machinery and materials at least 50 feet from the Railroad's nearest track.
- D. Vehicular crossings of railroad track are allowed only at existing crossings, or haul road crossings developed with Railroad approval.
- E. The Contractor is also advised that new railroad facilities within the project may be built by the Railroad. If applicable, these facilities are delineated in the plans. Be aware of the limits of responsibilities and coordinate efforts with the Railroad and TxDOT.
- F. Railroad requirements do not allow work within 50 feet of track centers when a train passes the work site and all personnel must clear the area within 50 feet of the track centerline and secure all equipment. Additional allowances may be pursued as outlined in 3.02 and 3.03.
- G. All permanent clearances shall be verified before project closing.

3.02 RAILROAD OPERATIONS

- A. Trains and/or equipment are expected on any track, at any time, in either direction. Become familiar with the train schedules in this location and structure bid assuming intermittent track windows in this period, as defined in Paragraph B that follows.
- B. All railroad tracks within and adjacent to the contract site are active, and rail traffic over these facilities shall be maintained throughout the Project. Activities may include both through moves and switching moves to local customers. railroad traffic and operations will occur continuously throughout the day and night on these tracks and shall be maintained at all times as defined herein. Coordinate and schedule the work so that construction activities do not interfere with railroad operations.
- C. Coordinate work windows with TxDOT and the Railroad's Designated Representative. Types of work windows include Conditional Work Windows and Absolute Work Windows, as defined below:
 - 1. Conditional Work Window: A Conditional Work Window is a period of time that railroad operations have priority over construction activities. When construction activities may occur on and/or adjacent to the railroad tracks within 25 feet of the nearest track, a railroad flag person will be required. At the direction of the railroad flag person, upon approach of a train, and when trains are present on the tracks, the tracks must be cleared (i.e., no construction equipment, materials or personnel within 25 feet, or as directed by the Railroad Designated Representative, from the tracks). Conditional Work Windows are available for the Project.
 - 2. Absolute Work Window: An Absolute Work Window is a period of time that construction activities are given priority over railroad operations. During this time frame, the designated railroad track(s) will be inactive for train movements and may be fouled by the Contractor. At the end of an Absolute Work Window, the railroad tracks and/or signals must be completely operational for train operations and all Railroad, Public Utilities Commission (PUC) and FRA requirements, codes and regulations for operational tracks must be satisfied. In the situation where the operating tracks and/or signals have been affected, the Railroad will perform inspections of the work prior to placing that track back into service. Railroad flag persons will be required for construction activities requiring an Absolute Work Window. Absolute Work Windows will not generally be granted. Any request will require a detailed explanation for Railroad review.

3.03 RIGHT OF ENTRY, ADVANCE NOTICE AND WORK STOPPAGES

- A. Do not perform any work within Railroad Right of Way without a valid executed Right of Entry Agreement if required on this project.
- B. Give advance notice to the Railroad as required in the "Contractor's Right of Entry Agreement" before commencing work in connection with construction upon or over Railroad Right of Way and observe the Railroad's rules and regulations with respect thereto.
- C. Perform all work upon Railroad Right of Way in a manner to avoid interference with or endanger the operations of the Railroad. Whenever work may affect the operations or safety of trains, submit the work method to the Railroad Designated Representative for approval. Approval does not relieve the Contractor from liability. Do not commence any work which requires flagging service or inspection service until the flagging protection required by the Railroad is available at the job site. See Section 3.15 for railroad flagging requirements.
- D. Make requests in writing for both Absolute and Conditional Work Windows, at least 30 days in advance of any work. Include in the written request:
 - 1. Exactly what the work entails.
 - 2. The days and hours that work will be performed.
 - 3. The exact location of work, and proximity to the tracks.
 - 4. The type of window requested and the amount of time requested.
 - 5. The designated contact person.
 Provide a written confirmation notice to the Railroad at least 48 hours before commencing work in connection with approved work windows when work is within 25 feet of nearest rail. Perform all work in accordance with previously approved work plans.
- E. Make provisions to protect operations and property of the Railroad should a condition arising from, or in connection with the work, require immediate and unusual action. If in the judgment of the Railroad Designated Representative such provisions are insufficient, the Railroad Designated Representative may require or provide such provisions as deemed necessary. In any event, such provisions shall be at the Contractor's expense and without cost to the Railroad or TxDOT. The Railroad or TxDOT shall have the right to order the Contractor to temporarily cease operations in the event of an emergency or, if in the opinion of the Railroad Designated Representative, the Contractor's operations could endanger railroad operations. In the event of such an order, immediately notify TxDOT of the order.

3.04 INSURANCE

Do not begin work upon or over Railroad Right of Way until furnishing the Railroad with the insurance policies, binders, certificates and endorsements required by the "Contractor's Right of Entry Agreement", and until the Railroad Designated Representative has advised TxDOT that such insurance is in accordance with the Agreement.

3.05 RAILROAD SAFETY ORIENTATION

- A. Complete the railroad course "Orientation for Contractor's Safety", and maintain current registration prior to working on railroad property. This course is required to be completed annually by Contractor and Subcontractor personnel working on site.

"UPRR, BNSF, KCS/TEXMEX will not accept on-track safety training certificates from other railroads. Refer to Railroad specific contractor right of entry for training information."
- B. Know and follow the "Contractor's Right of Entry Agreement" EXHIBIT D, MINIMUM SAFETY REQUIREMENTS regarding clothing, personal protective equipment, and general safety requirements.

3.06 COOPERATION

The Railroad will cooperate with Contractor so that work may be conducted in an efficient manner, and will cooperate with Contractor in enabling use of Railroad Right of Way in performing the work.

3.07 MINIMUM CONSTRUCTION CLEARANCES FOR FALSEWORK AND OTHER TEMPORARY STRUCTURES


Abide by the following minimum temporary clearances during the course of construction:
A. 15' - 0" (BNSF) (UPRR) and 14' - 0" (KCS) horizontal from centerline of track
B. 22' (KCS) and 21' - 6" (UPRR & BNSF) vertically above top of rail.

For construction clearance less than listed above, obtain local Railroad Operating Unit review and approval.

3.08 APPROVAL OF REDUCED CLEARANCES

- A. Maintain minimum track clearances during construction as specified in Section 3.07.
- B. Submit any proposed infringement on the specified minimum clearances to the Railroad Designated Representative through TxDOT at least 30 days in advance of the work. Do not proceed with such infringement without written approval by the Railroad Designated Representative.
- C. Do not commence work involving an approved infringement without receiving written assurance from the Railroad Designated Representative that arrangements have been made for any necessary flagging service.

DATE: 7/6/2023 8:29:59 AM
FILE: c:\ttdot\pw_online\ttdot3\magtaba_babiker\0534899\RR_Non_Bridge-Projects.dgn

		Rail Division	
RAILROAD REQUIREMENTS FOR NON-BRIDGE CONSTRUCTION PROJECTS			
FILE:	DN: TxDOT	CK: TxDOT	DW: TxDOT
© TxDOT October 2018	CONT	SECT	JOB
REVISIONS March 2020	0833	01	009, etc. FM 217, etc
	DIST	COUNTY	SHEET NO.
	WACO	Coryell, etc	24

3.09 MAINTENANCE OF RAILROAD FACILITIES

- A. Maintain all ditches and drainage structures free of silt or other obstructions resulting from Contractor's operations. Repair eroded areas and any other damage within Railroad Right of Way and repair any other damage to the property of the Railroad, or its tenants.
- B. Perform all such maintenance and repair of damages due to the Contractor's operations at Contractor's expense.
- C. Submit a proposed method of erosion control for review by the Railroad prior to beginning any grading on the project site. Comply with all applicable local, state and federal regulations when developing and implementing such erosion control.

3.10 SITE INSPECTIONS BY RAILROAD'S DESIGNATED REPRESENTATIVE

- A. In addition to the office reviews of construction submittals, site inspections may be performed by the Railroad Designated Representative at significant points during construction, including the following if applicable:
 1. Pre-construction meetings.
 2. Pile driving/drilling of caissons or drilled shafts.
 3. Reinforcement and concrete placement for railroad bridge substructure and/or superstructure.
 4. Erection of precast concrete or steel bridge superstructure.
 5. Placement of waterproofing (prior to placing ballast on bridge deck).
 6. Completion of the bridge structure.
- B. Site inspection is not limited to the milestone events listed above. Site visits to check progress of the work may be performed at any time throughout the construction as deemed necessary by the Railroad.
- C. Provide a detailed construction schedule, including the proposed temporary horizontal and vertical clearances and construction sequence for all work to TxDOT for submittal to the Railroad Designated Representative for review prior to commencement of work. Include the anticipated dates when the above listed events will occur. Update this schedule for the above listed events as necessary and each month at a minimum to allow the Railroad to schedule site inspections.

3.11 RAILROAD REPRESENTATIVES

Railroad representatives, conductors, flag person or watch person will be provided by the Railroad at expense of TxDOT to protect Railroad facilities, property and movements of its trains or engines. In general, the Railroad will furnish such personnel or other protective services as follows:

- A. When any part of any equipment is standing or being operated within 25 feet, measured horizontally, from nearest rail of any track on which trains may operate, or when any object is off the ground and any dimension thereof could extend inside the 25 foot limit, or when any erection or construction activities are in progress within such limits, regardless of elevation above or below track.
- B. For any excavation below elevation of track subgrade if, in the opinion of the Railroad Designated Representative, track or other railroad facilities may be subject to settlement or movement.
- C. During any clearing, grubbing, excavation or grading in proximity to railroad facilities, which, in the opinion of the Railroad Designated Representative, may endanger railroad facilities or operations.
- D. During any Contractor's operations when, in the opinion of the Railroad Designated Representative, railroad facilities, including, but not limited to, tracks, buildings, signals, wire lines, or pipe lines, may be endangered.
- E. Arrange with the Railroad Designated Representative to provide the adequate number of flag persons to accomplish the work.

3.12 COMMUNICATIONS AND SIGNAL LINES

If required, the Railroad will rearrange its communications and signal lines, its grade crossing warning devices, train signals and tracks, and facilities that are in use and maintained by the Railroad's forces in connection with its operation at expense of TxDOT. This work by the Railroad will be done by its own forces and it is not a part of the Work under this Contract.

3.13 TRAFFIC CONTROL

Coordinate any operations that control traffic across or around railroad facilities with the Railroad Designated Representative.

3.14 CONSTRUCTION EXCAVATIONS AND BORING ACTIVITIES UNDER TRACK

- A. Take special precaution and care in connection with excavating and shoring. Excavations for construction of footings, piers, columns, walls or other facilities that require shoring shall comply with requirements of TxDOT, OSHA, AREMA and Railroad "Guidelines for Temporary Shoring".
- B. The project plans indicate whether there are fiber optic lines or other such telecommunications systems that require consideration. Regardless, contact the necessary call center to determine if such cable systems are present:

UPRR 1-800-336-9193
7:00 AM to 9:00 PM CST Monday-Friday except holidays,
staffed 24 hrs/day for emergencies
48 hrs notice required

BNSF 1-800-533-2891
24 hour number
5 working days notice required

KCS 1-800-344-8377
Texas One Call, a 24 hour number
48 hrs notice required, excluding weekends and holidays

If a telecommunications system is buried anywhere on or near railroad property, coordinate with TxDOT, the Railroad and the Telecommunication Company(ies) to arrange for relocation or protective measures prior to beginning work on or near railroad property. Refer to the project General Notes for additional information.

- C. Projects involving a boring or jack and bore operation under track such as drainage pipes or culverts and utilities require an installation plan reviewed and approved by the Railroad and TxDOT prior to proceeding with such construction. A railroad inspector and contractor assisted monitoring of ground and track movement is required to maintain safe passage of rail traffic. Stop installation and do not allow passage of trains if movements in excess of 1/4 inch vertical or horizontal is detected in the tracks. Immediately repair the damage to the satisfaction of TxDOT and the Railroad before proceeding.


3.15 RAILROAD FLAGGING

Per the Right of Entry Agreement for flagging, notify the Railroad Representative at least 10 working days in advance of Contractor's work and at least 30 working days in advance of any Contractor's work in which any person or equipment will be within 25 feet of nearest rail or as specified in the Contractor Right of Entry (CROE).

3.16 CLEANING OF RIGHT-OF-WAY

When work is complete, remove all tools, implements, and other materials brought into Railroad Right of Way and leave the right of Way in a clean and presentable condition to the satisfaction of TxDOT and the Railroad.

DATE: 7/6/2023 8:29:59 AM
FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\d0534899\RR_Non_Bridge-Projects.dgn

 Texas Department of Transportation				Rail Division	
RAILROAD REQUIREMENTS FOR NON-BRIDGE CONSTRUCTION PROJECTS					
FILE:	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT	
©TxDOT October 2018	CONT	SECT	JOB	HIGHWAY	
REVISIONS		0833	01	009, etc. FM 217, etc	
March 2020		DIST	COUNTY	SHEET NO.	
WACO		Coryell, etc		25	

DATE: 7/6/2023 8:30:05 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0534899\RR_Scope_of_Work_of_Railroad_Scope_of_Work.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from one format to another or for incorrect results or damages resulting from its use.

I. WORK AT CROSSING LOCATIONS (AT GRADE, HIGHWAY OVERPASS, HIGHWAY UNDERPASS, PEDESTRIAN, OR CLOSED/ABANDONED)

DOT #: 416027L
 Crossing Type: At-Grade
 RR Company Owning Track at Crossing: UPRR
 Operating RR Company at Track: UPRR
 RR MP: 206.690
 RR Subdivision: Fort Worth
 City: Itasca
 County: Hill
 CSJ at this Crossing: 0888-01-022
 Highway/Roadway name crossing the railroad: FM 934/(FM 66)
 # of regularly scheduled trains per day at this crossing: 18
 # of switching movements per day at this crossing: 0
 % of estimated contract cost of work within railroad ROW: <1%

Scope of Work at this Crossing to Be Performed by State Contractor:
 Seal Coat

Scope of Work at this Crossing to Be Performed by Railroad Company:
 None

II. OTHER PROJECT WORK WITHIN RAILROAD RIGHTS-OF-WAY (ROW)

None

III. FLAGGING & INSPECTION

of Days of Railroad Flagging Expected: 1
 On this project, night or weekend flagging is:
 Expected
 Not Expected
 Flagging services will be provided by:
 Railroad Company: TxDOT will pay flagging invoices
 Outside Party: Contractor will pay flagging invoices, to be reimbursed by TxDOT

Contractor must incorporate flaggers into anticipated construction schedule. The Railroad requires a 30 day notice if their flaggers are to be utilized. If Contractor falls behind schedule due to their own negligence and is not ready for scheduled flaggers, any flagging charges will be paid by Contractor.

- Contact Information for Flagging:
- UPRR - UP.info@railpros.com
Call Center 877-315-0513, Select #1 for flagging
 - BNSF - BNSF.info@railpros.com
Call Center 877-315-0513, Select #1 for flagging
 - KCS - KCS.info@railpros.com
Call Center 877-315-0513, Select #1 for flagging
- Bottom Line On-Track Safety Services
bottomline076@aol.com, 903-767-7630
 - OTHERS _____

Contractor must incorporate Construction Inspection into anticipated construction schedule.

Not Required
 Required: Contact Information for Construction Inspection:

IV. CONSTRUCTION WORK TO BE PERFORMED BY THE RAILROAD

On this project, construction work to be performed by a railroad company is:
 Required
 Not Required

Coordinate with TxDOT for any work to be performed by the Railroad Company. TxDOT must issue a work order for any work done by the Railroad Company prior to the work being performed.

V. RAILROAD INSURANCE REQUIREMENTS

Railroad reference number shall be provided by TxDOT CST or DO.
 The Contractor shall confirm the insurance requirements with the Railroad as the insurance limits are subject to change without notice. Insurance policies must be issued for and on behalf of the Railroad. Where more than one Railroad Company is operating on the same right of way or where several Railroad Companies are involved and operate on their own separate rights of way, provide separate insurance policies in the name of each Railroad Company.
 No direct compensation will be made to the Contractor for providing the insurance coverages shown below or any deductibles. These costs are incidental to the various bid items.

Type of Insurance	Amount of Coverage (Minimum)
Workers Compensation	\$500,000 / \$500,000 / \$500,000
Commercial General Liability	\$2,000,000 / \$4,000,000
Business Automobile	\$2,000,000 combined single limit
Railroad Protective Liability	
<input type="checkbox"/> Not Required	
<input checked="" type="checkbox"/> Non - Bridge Projects	\$2,000,000 / \$6,000,000
<input type="checkbox"/> Bridge Projects	\$5,000,000 / \$10,000,000
<input type="checkbox"/> Other	

VI. CONTRACTOR'S RIGHT OF ENTRY (ROE) AGREEMENT

On this project, an ROE agreement is:
 Not Required
 Required: TxDOT to assist in obtaining (see Item 5, Article 8.3)
 With the following railroad companies: UPRR
 Required: Contractor to obtain (see Item 5, Article 8.4)
 With the following railroad companies: _____
 Railroad website: _____

To view previously approved ROE Agreement templates agreed upon between the State and Railroad, see:

<http://www.txdot.gov/inside-txdot/division/rail/samples.html>

Approved ROE Agreement templates are not to be modified by the Contractor.

Contractor shall not operate within Railroad Right of Way without an executed Construction & Maintenance Agreement between the State and the Railroad and an executed ROE agreement between the Contractor and the Railroad if required on project.

VII. RAILROAD COORDINATION MEETING

On this project, a Railroad Coordination Meeting is:
 Not Required
 Required

See Item 5, Article 8.1 for more details.

VIII. SUBCONTRACTORS

Contractor shall not subcontract work without written consent of TxDOT. Subcontractors are required to maintain the same insurance coverage as required of the Contractor.

IX. EMERGENCY NOTIFICATION

In Case of Railroad Emergency
Call Union Pacific Railroad (UPRR)
at 888-877-7267
Location: DOT 416027L
RR MP: 206.690

Rail Division

RAILROAD SCOPE OF WORK
 PROJECT SPECIFIC DETAILS
 0888-01-022

FILE: RR_Scope_of_Work.dgn	DN: TxDOT	CK: _____	DW: _____	CK: _____
© TxDOT June 2014	CONT	SECT	JOB	HIGHWAY
3/2020	REVISIONS	0833 01	009, etc. FM 217, etc	
	DIST	COUNTY	SHEET NO.	
	WACO	Coryell, etc	26	

DATE: 7/6/2023 8:30:09 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0534899\RR_Scope_of_Work_of_RR\0534899\RR_Scope_of_Work_of_RR.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information into digital format or for incorrect results or damages resulting from its use.

I. WORK AT CROSSING LOCATIONS (AT GRADE, HIGHWAY OVERPASS, HIGHWAY UNDERPASS, PEDESTRIAN, OR CLOSED/ABANDONED)

DOT #: 448426L
 Crossing Type: at Grade
 RR Company Owning Track at Crossing: UPRR
 Operating RR Company at Track: UPRR
 RR MP: 136.210
 RR Subdivision: Fort Worth
 City: Marlin
 County: Falls
 CSJ at this Crossing: 2634-01-019
 Highway/Roadway name crossing the railroad: FM 712
 # of regularly scheduled trains per day at this crossing: 12
 # of switching movements per day at this crossing: 0
 % of estimated contract cost of work within railroad ROW: <1%

Scope of Work at this Crossing to Be Performed by State Contractor:
 Seal Coat

Scope of Work at this Crossing to Be Performed by Railroad Company:
 None

II. OTHER PROJECT WORK WITHIN RAILROAD RIGHTS-OF-WAY (ROW)

None

III. FLAGGING & INSPECTION

of Days of Railroad Flagging Expected: 1
 On this project, night or weekend flagging is:
 Expected
 Not Expected
 Flagging services will be provided by:
 Railroad Company: TxDOT will pay flagging invoices
 Outside Party: Contractor will pay flagging invoices, to be reimbursed by TxDOT
 Contractor must incorporate flaggers into anticipated construction schedule. The Railroad requires a 30 day notice if their flaggers are to be utilized. If Contractor falls behind schedule due to their own negligence and is not ready for scheduled flaggers, any flagging charges will be paid by Contractor.

Contact Information for Flagging:

- UPRR - UP.info@railpros.com
Call Center 877-315-0513, Select #1 for flagging
- BNSF - BNSF.info@railpros.com
Call Center 877-315-0513, Select #1 for flagging
- KCS - KCS.info@railpros.com
Call Center 877-315-0513, Select #1 for flagging
- Bottom Line On-Track Safety Services
bottomline076@aol.com, 903-767-7630

OTHERS _____

Contractor must incorporate Construction Inspection into anticipated construction schedule.

Not Required
 Required: Contact Information for Construction Inspection:

IV. CONSTRUCTION WORK TO BE PERFORMED BY THE RAILROAD

On this project, construction work to be performed by a railroad company is:
 Required
 Not Required

Coordinate with TxDOT for any work to be performed by the Railroad Company. TxDOT must issue a work order for any work done by the Railroad Company prior to the work being performed.

V. RAILROAD INSURANCE REQUIREMENTS

Railroad reference number shall be provided by TxDOT CST or DO.
 The Contractor shall confirm the insurance requirements with the Railroad as the insurance limits are subject to change without notice.
 Insurance policies must be issued for and on behalf of the Railroad. Where more than one Railroad Company is operating on the same right of way or where several Railroad Companies are involved and operate on their own separate rights of way, provide separate insurance policies in the name of each Railroad Company.
 No direct compensation will be made to the Contractor for providing the insurance coverages shown below or any deductibles. These costs are incidental to the various bid items.

Type of Insurance	Amount of Coverage (Minimum)
Workers Compensation	\$500,000 / \$500,000 / \$500,000
Commercial General Liability	\$2,000,000 / \$4,000,000
Business Automobile	\$2,000,000 combined single limit
Railroad Protective Liability	
<input type="checkbox"/> Not Required	
<input checked="" type="checkbox"/> Non - Bridge Projects	\$2,000,000 / \$6,000,000
<input type="checkbox"/> Bridge Projects	\$5,000,000 / \$10,000,000
<input type="checkbox"/> Other	

VI. CONTRACTOR'S RIGHT OF ENTRY (ROE) AGREEMENT

On this project, an ROE agreement is:
 Not Required
 Required: TxDOT to assist in obtaining (see Item 5, Article 8.3)
 With the following railroad companies: UPRR
 Required: Contractor to obtain (see Item 5, Article 8.4)
 With the following railroad companies: _____
 Railroad website: _____

To view previously approved ROE Agreement templates agreed upon between the State and Railroad, see:

<http://www.txdot.gov/inside-txdot/division/rail/samples.html>

Approved ROE Agreement templates are not to be modified by the Contractor.

Contractor shall not operate within Railroad Right of Way without an executed Construction & Maintenance Agreement between the State and the Railroad and an executed ROE agreement between the Contractor and the Railroad if required on project.

VII. RAILROAD COORDINATION MEETING

On this project, a Railroad Coordination Meeting is:
 Not Required
 Required

See Item 5, Article 8.1 for more details.

VIII. SUBCONTRACTORS

Contractor shall not subcontract work without written consent of TxDOT. Subcontractors are required to maintain the same insurance coverage as required of the Contractor.

IX. EMERGENCY NOTIFICATION

In Case of Railroad Emergency
Call Union Pacific Railroad (UPRR)
at 800-848-8715
Location: DOT 448426 L
RRMP: 136.210

Rail Division

RAILROAD SCOPE OF WORK
 PROJECT SPECIFIC DETAILS
 2634-01-019

FILE: RR_Scope_of_Work.dgn	DN: TxDOT	CK: _____	DW: _____	CK: _____
© TxDOT June 2014	CONT	SECT	JOB	HIGHWAY
3/2020	REVISIONS	0833 01	009, etc. FM 217, etc	
	DIST	COUNTY	SHEET NO.	
	WACO	Coryell, etc	27	

DATE: 7/6/2023 8:30:14 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0534899\RR_Scope_of_Work_of_0534899.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of information to digital format or for incorrect results or damages resulting from its use.

I. WORK AT CROSSING LOCATIONS (AT GRADE, HIGHWAY OVERPASS, HIGHWAY UNDERPASS, PEDESTRIAN, OR CLOSED/ABANDONED)

DOT #: 023056J
 Crossing Type: at Grade
 RR Company Owning Track at Crossing: BNSF
 Operating RR Company at Track: BNSF
 RR MP: 239.980
 RR Subdivision: Fort Worth
 City: Mcgregor
 County: McLennan
 CSJ at this Crossing: 2674-02-012
 Highway/Roadway name crossing the railroad: FM 2671 (Mcgregor South Loop)
 # of regularly scheduled trains per day at this crossing: 26
 # of switching movements per day at this crossing: 0
 % of estimated contract cost of work within railroad ROW: <1%

Scope of Work at this Crossing to Be Performed by State Contractor:
Seal Coat

Scope of Work at this Crossing to Be Performed by Railroad Company:
None

II. OTHER PROJECT WORK WITHIN RAILROAD RIGHTS-OF-WAY (ROW)

None

III. FLAGGING & INSPECTION

of Days of Railroad Flagging Expected: 1
 On this project, night or weekend flagging is:
 Expected
 Not Expected
 Flagging services will be provided by:
 Railroad Company: TxDOT will pay flagging invoices
 Outside Party: Contractor will pay flagging invoices, to be reimbursed by TxDOT
 Contractor must incorporate flaggers into anticipated construction schedule. The Railroad requires a 30 day notice if their flaggers are to be utilized. If Contractor falls behind schedule due to their own negligence and is not ready for scheduled flaggers, any flagging charges will be paid by Contractor.

Contact Information for Flagging:

UPRR - UP.info@railpros.com
 Call Center 877-315-0513, Select #1 for flagging
 BNSF - BNSF.info@railpros.com
 Call Center 877-315-0513, Select #1 for flagging
 KCS - KCS.info@railpros.com
 Call Center 877-315-0513, Select #1 for flagging
 - Bottom Line On-Track Safety Services
 bottomline076@aol.com, 903-767-7630

OTHERS _____

Contractor must incorporate Construction Inspection into anticipated construction schedule.

Not Required
 Required: Contact Information for Construction Inspection:

IV. CONSTRUCTION WORK TO BE PERFORMED BY THE RAILROAD

On this project, construction work to be performed by a railroad company is:
 Required
 Not Required

Coordinate with TxDOT for any work to be performed by the Railroad Company. TxDOT must issue a work order for any work done by the Railroad Company prior to the work being performed.

V. RAILROAD INSURANCE REQUIREMENTS

Railroad reference number shall be provided by TxDOT CST or DO.

The Contractor shall confirm the insurance requirements with the Railroad as the insurance limits are subject to change without notice.

Insurance policies must be issued for and on behalf of the Railroad. Where more than one Railroad Company is operating on the same right of way or where several Railroad Companies are involved and operate on their own separate rights of way, provide separate insurance policies in the name of each Railroad Company.

No direct compensation will be made to the Contractor for providing the insurance coverages shown below or any deductibles. These costs are incidental to the various bid items.

Type of Insurance	Amount of Coverage (Minimum)
Workers Compensation	\$500,000 / \$500,000 / \$500,000
Commercial General Liability	\$2,000,000 / \$4,000,000
Business Automobile	\$2,000,000 combined single limit
Railroad Protective Liability	
<input type="checkbox"/> Not Required	
<input checked="" type="checkbox"/> Non - Bridge Projects	\$2,000,000 / \$6,000,000
<input type="checkbox"/> Bridge Projects	\$5,000,000 / \$10,000,000
<input type="checkbox"/> Other	

VI. CONTRACTOR'S RIGHT OF ENTRY (ROE) AGREEMENT

On this project, an ROE agreement is:

Not Required
 Required: TxDOT to assist in obtaining (see Item 5, Article 8.3)

With the following railroad companies: BNSF

Required: Contractor to obtain (see Item 5, Article 8.4)

With the following railroad companies: _____

Railroad website: _____

To view previously approved ROE Agreement templates agreed upon between the State and Railroad, see:

<http://www.txdot.gov/inside-txdot/division/rail/samples.html>

Approved ROE Agreement templates are not to be modified by the Contractor.

Contractor shall not operate within Railroad Right of Way without an executed Construction & Maintenance Agreement between the State and the Railroad and an executed ROE agreement between the Contractor and the Railroad if required on project.

VII. RAILROAD COORDINATION MEETING

On this project, a Railroad Coordination Meeting is:

Not Required
 Required


See Item 5, Article 8.1 for more details.

VIII. SUBCONTRACTORS

Contractor shall not subcontract work without written consent of TxDOT. Subcontractors are required to maintain the same insurance coverage as required of the Contractor.

IX. EMERGENCY NOTIFICATION

In Case of Railroad Emergency
 Call (BNSF)
 at 800-333-2383
 Location: DOT 023056J
 RRMP: 239.980

 Texas Department of Transportation		Rail Division
RAILROAD SCOPE OF WORK PROJECT SPECIFIC DETAILS 2674-02-012		
FILE: RR_Scope_of_Work.dgn	DN: TxDOT	CK: _____
© TxDOT June 2014	CONT SECT	JOB HIGHWAY
3/2020	REVISIONS	0833 01 009, etc. FM 217, etc
DIST	COUNTY	SHEET NO.
WACO	Coryell, etc	28

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:17 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0577044\bc-21.dgn

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- The Engineer has the final decision on the location of all traffic control devices.
- Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:


- Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).


THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12

 Texas Department of Transportation		Traffic Safety Division Standard
BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS		
BC (1) - 21		
FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT
	JOB	
	HIGHWAY	
4-03 7-13	0833	01
9-07 8-14	009, etc.	
5-10 5-21	WACO	Coryell, etc
		29

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPICAL LOCATION OF CROSSROAD SIGNS

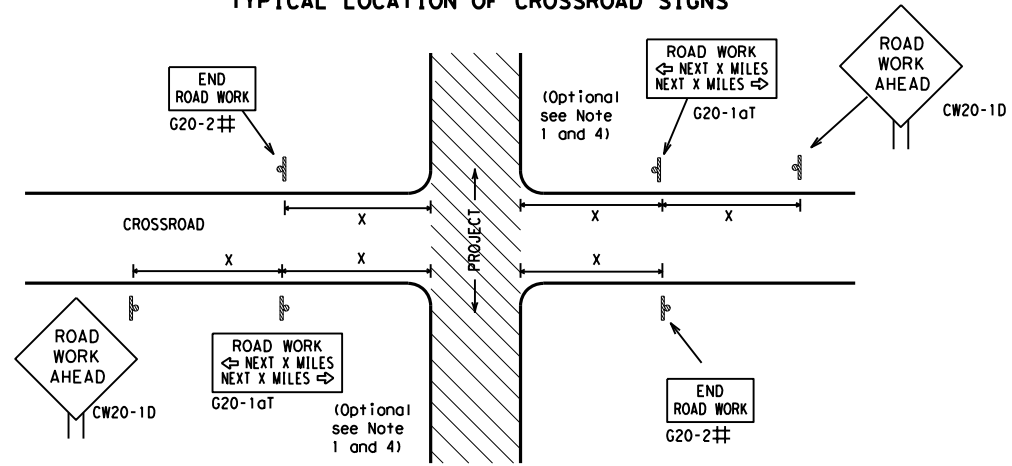

May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)

- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
- The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
- Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
- The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
- Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
- When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

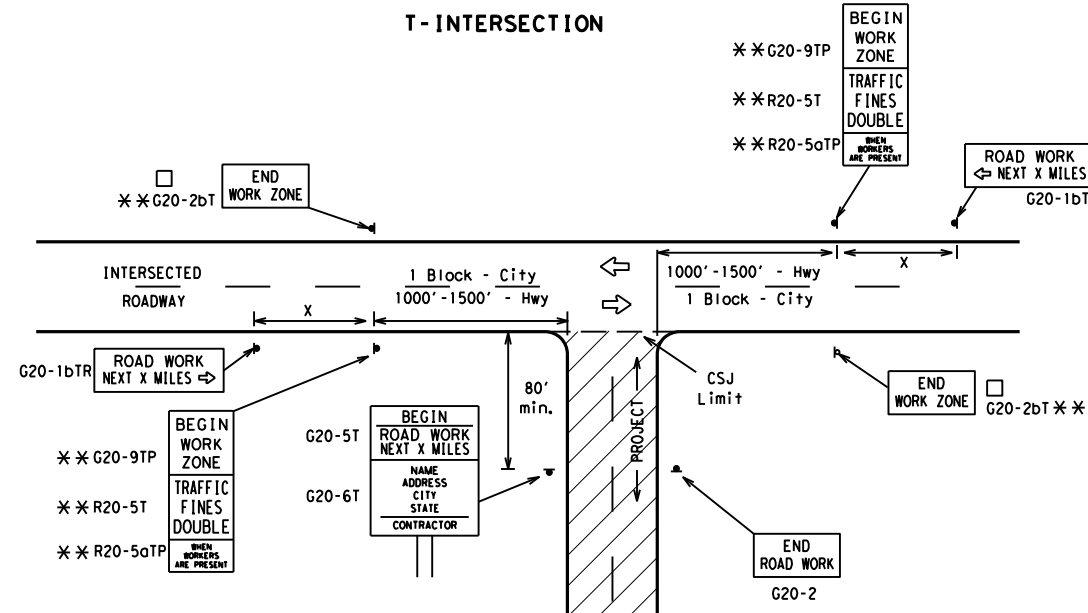

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{1,5,6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
			*	* ³


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

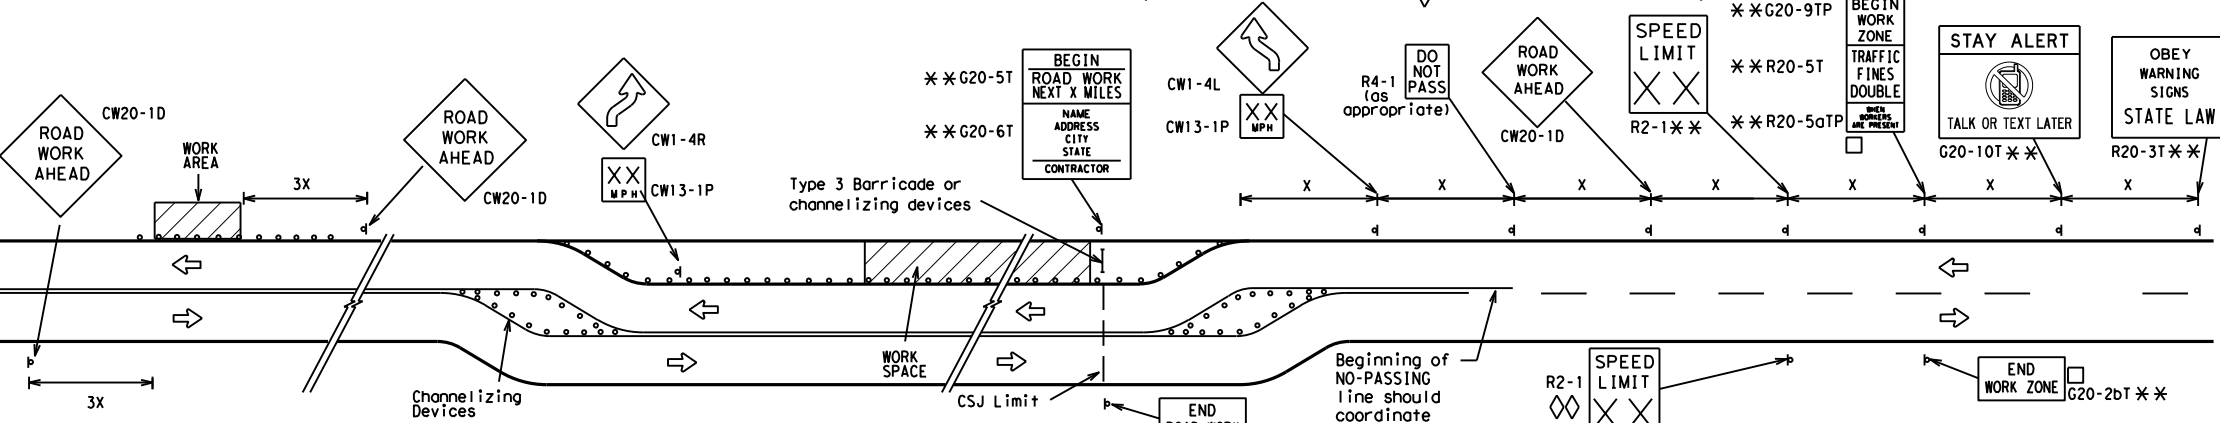

When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

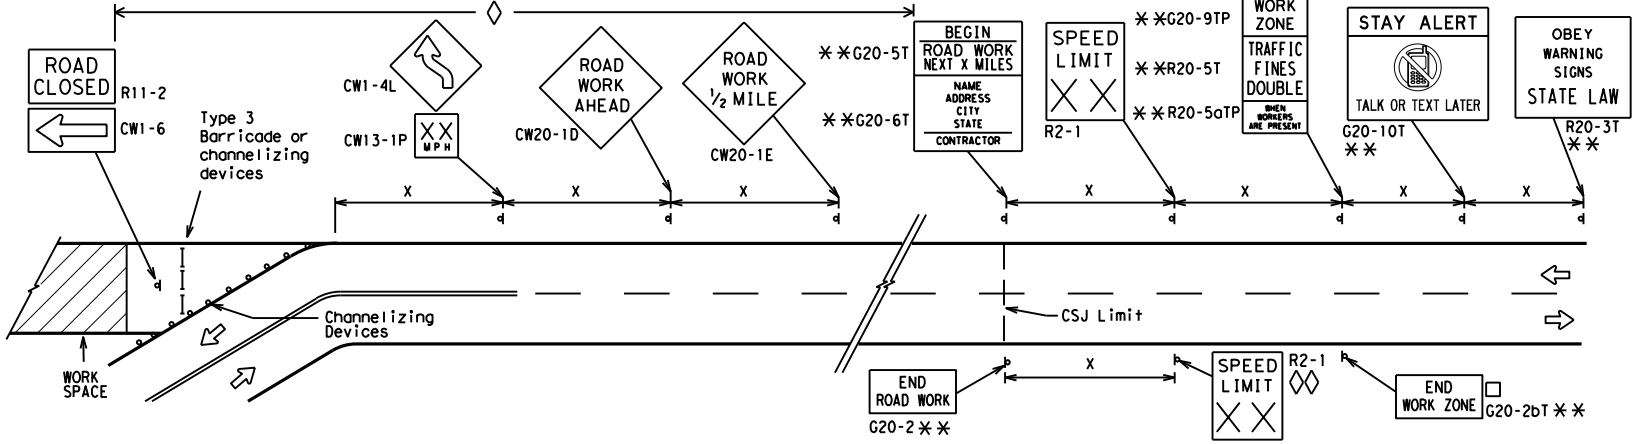

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "x" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
 - CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
 - Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
 - Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND	
—	Type 3 Barricade
○ ○ ○	Channelizing Devices
—	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



BARRICADE AND CONSTRUCTION PROJECT LIMIT

BC(2)-21


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
9-07 8-14	DIST	COUNTY		SHEET NO.
7-13 5-21	WACO	Coryell, etc		30

DATE: 7/6/2023 8:30:18 AM
 FILE: c:\txdot\pw_online\txdot3\mgt\aba_babiker\0577044\bc-21.dgn

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

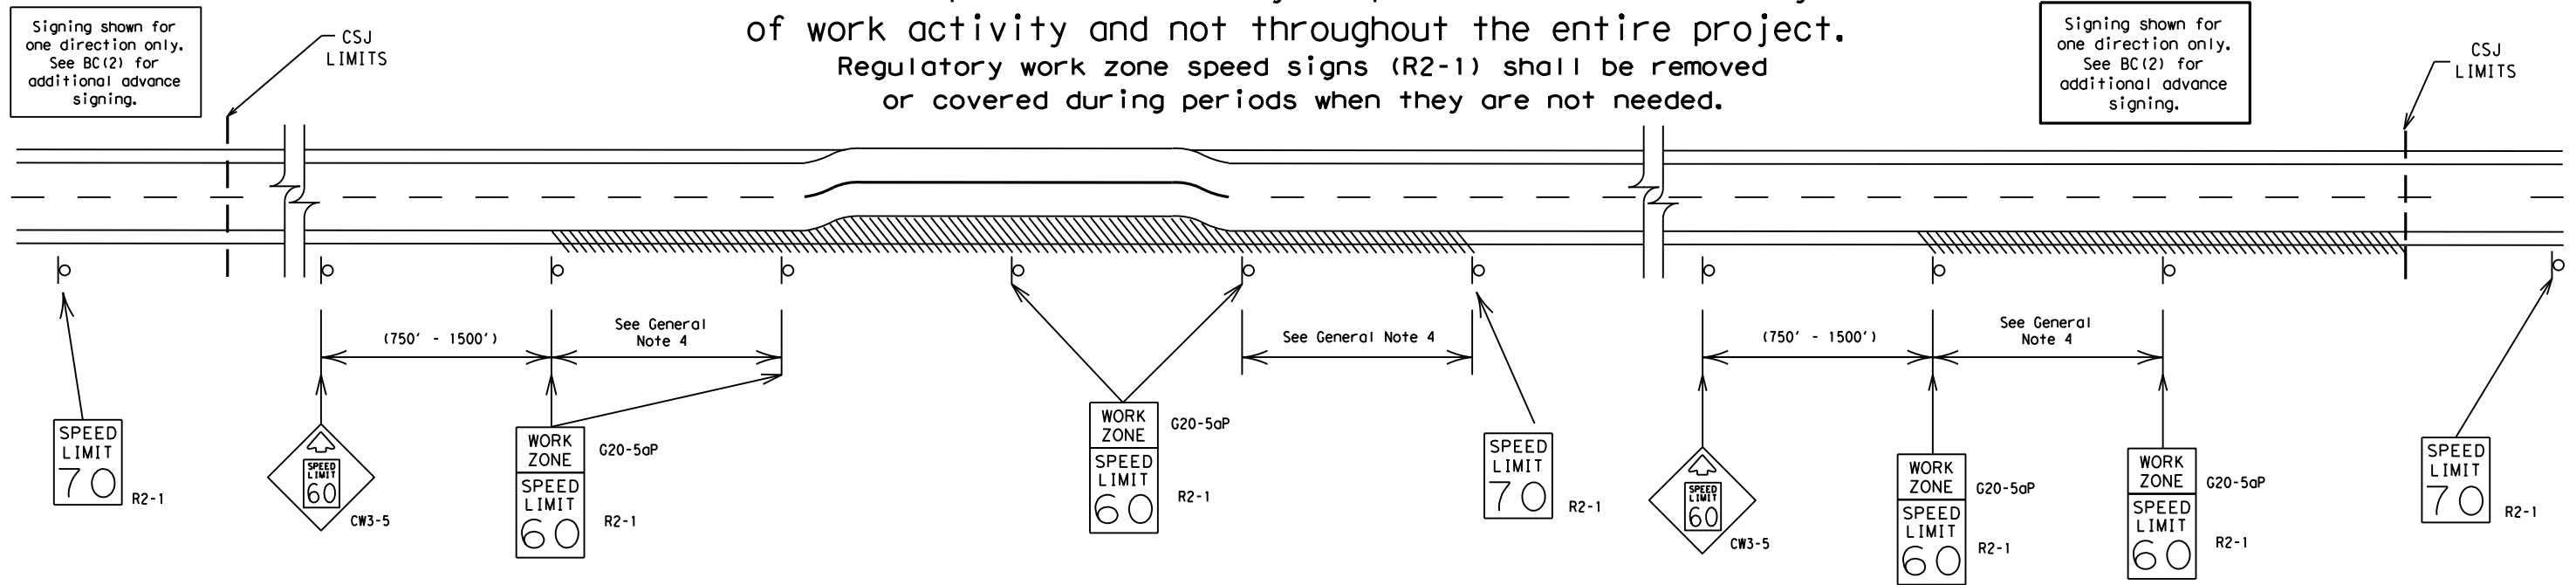

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
 - 40 mph and greater 0.2 to 2 miles
 - 35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Law enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:30:18 AM
FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0577044\bc-21.dgn

SHEET 3 OF 12

		Traffic Safety Division Standard	
<h2>BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT</h2>			
<h3>BC (3) -21</h3>			
FILE:	bc-21.dgn	DW:	TxDOT
© TxDOT	November 2002	CONT:	SECT:
REVISIONS		JOB:	HIGHWAY:
9-07	8-14	0833 01	009, etc. FM 217, etc
7-13	5-21	DIST:	COUNTY:
		WACO	Coryell, etc
			SHEET NO. 31

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

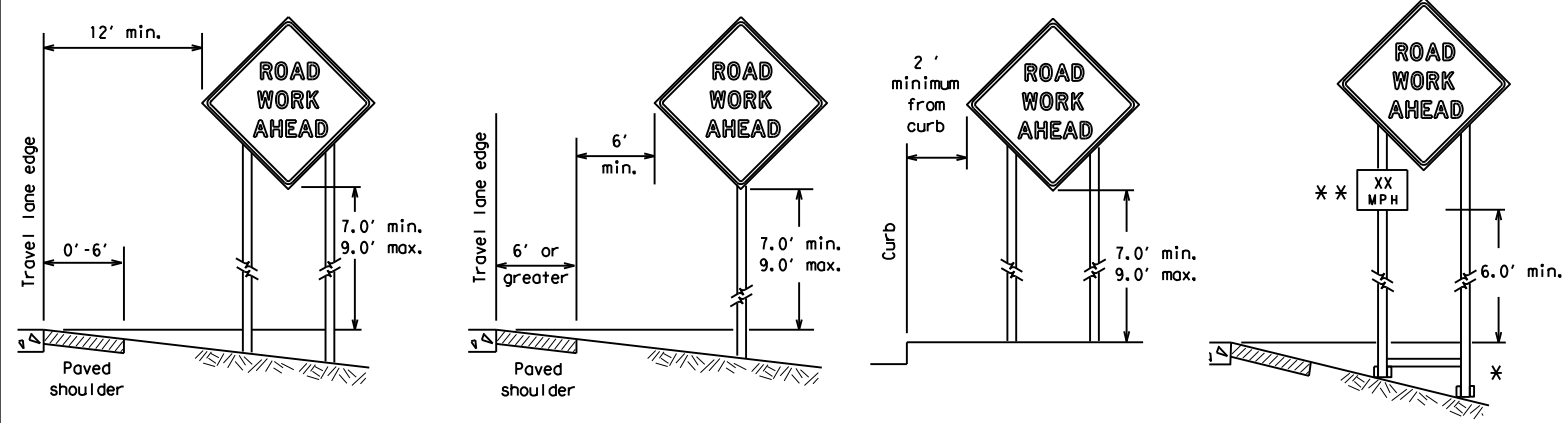

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

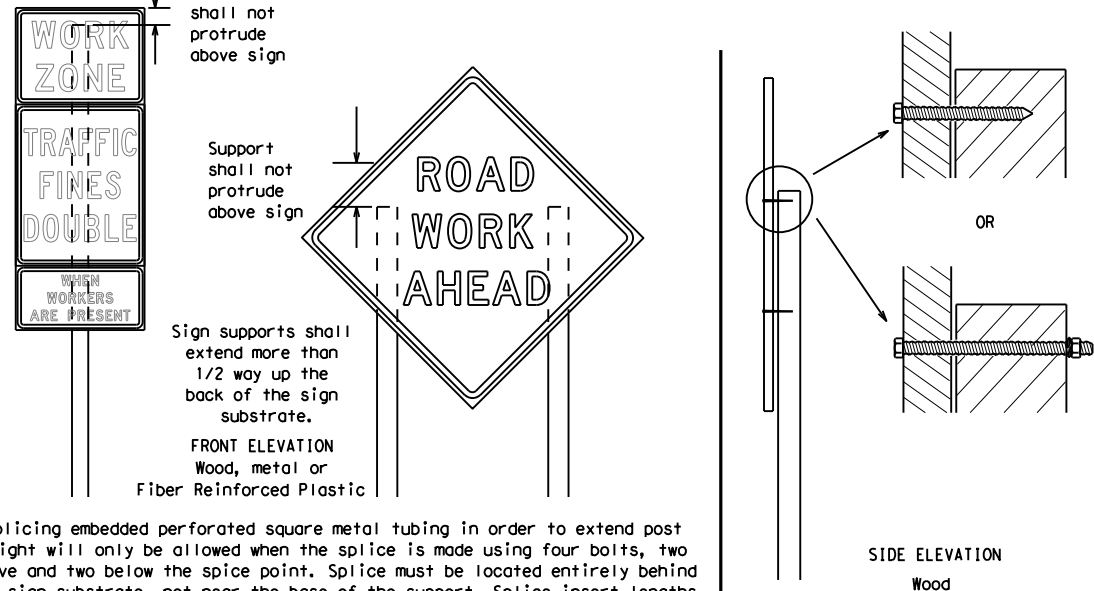


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nails shall NOT be allowed.
Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflective when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

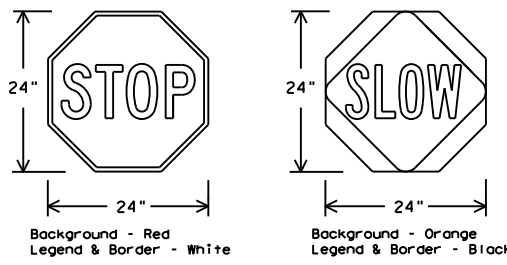

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short, duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12





BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) - 21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	OW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WACO	Coryell, etc	32	


DATE: 7/6/2023 8:30:18 AM
FILE: c:\t\dot\p_w_online\t\dot3\magtaba_babiker\q0577044\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

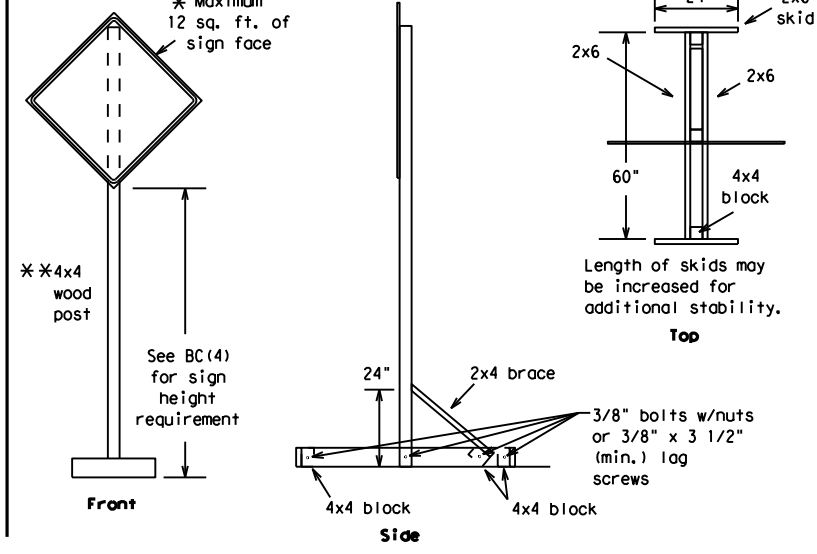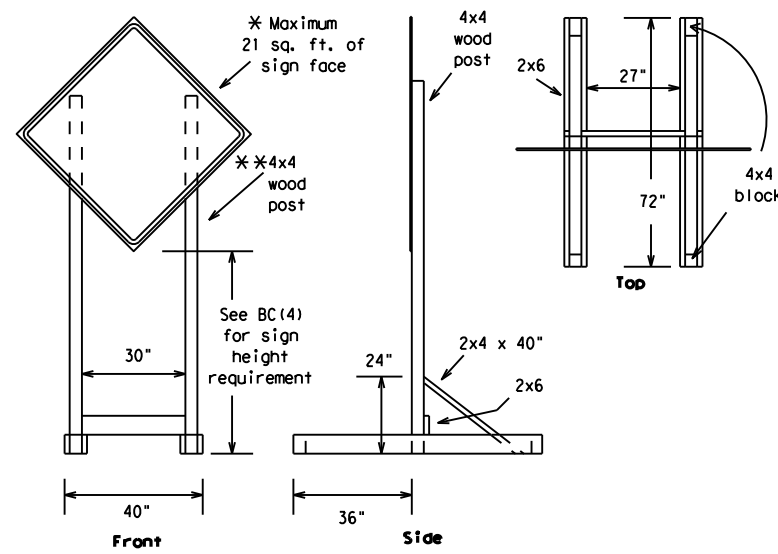



SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

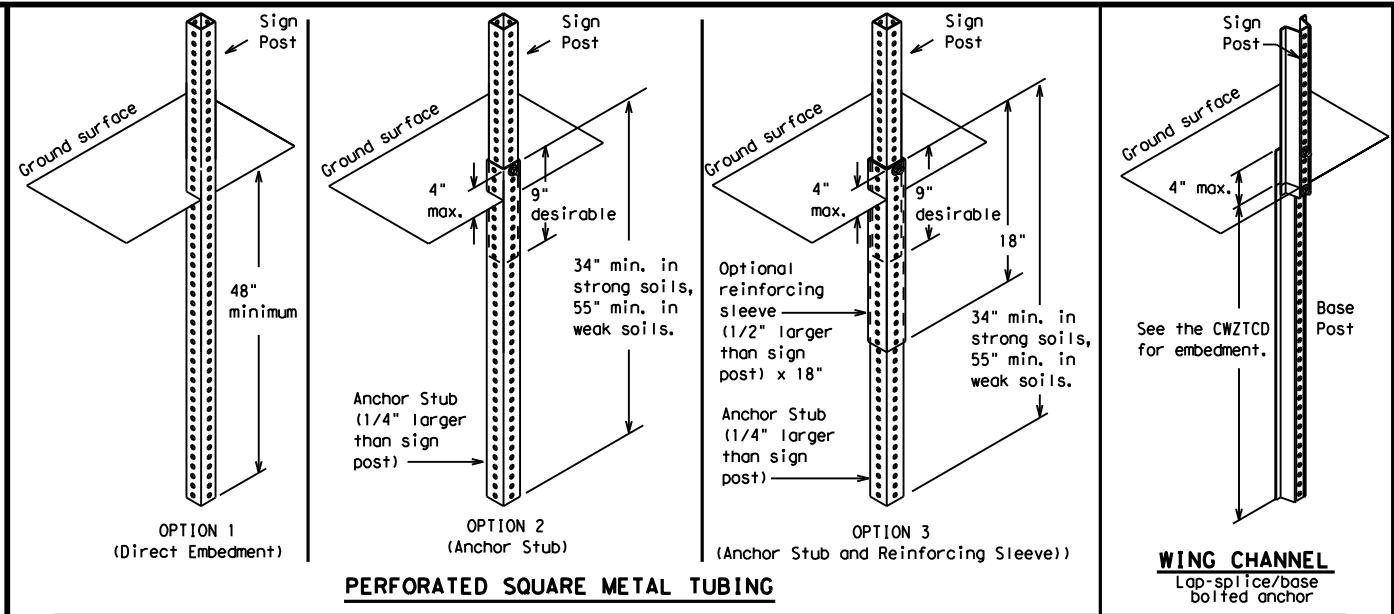

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

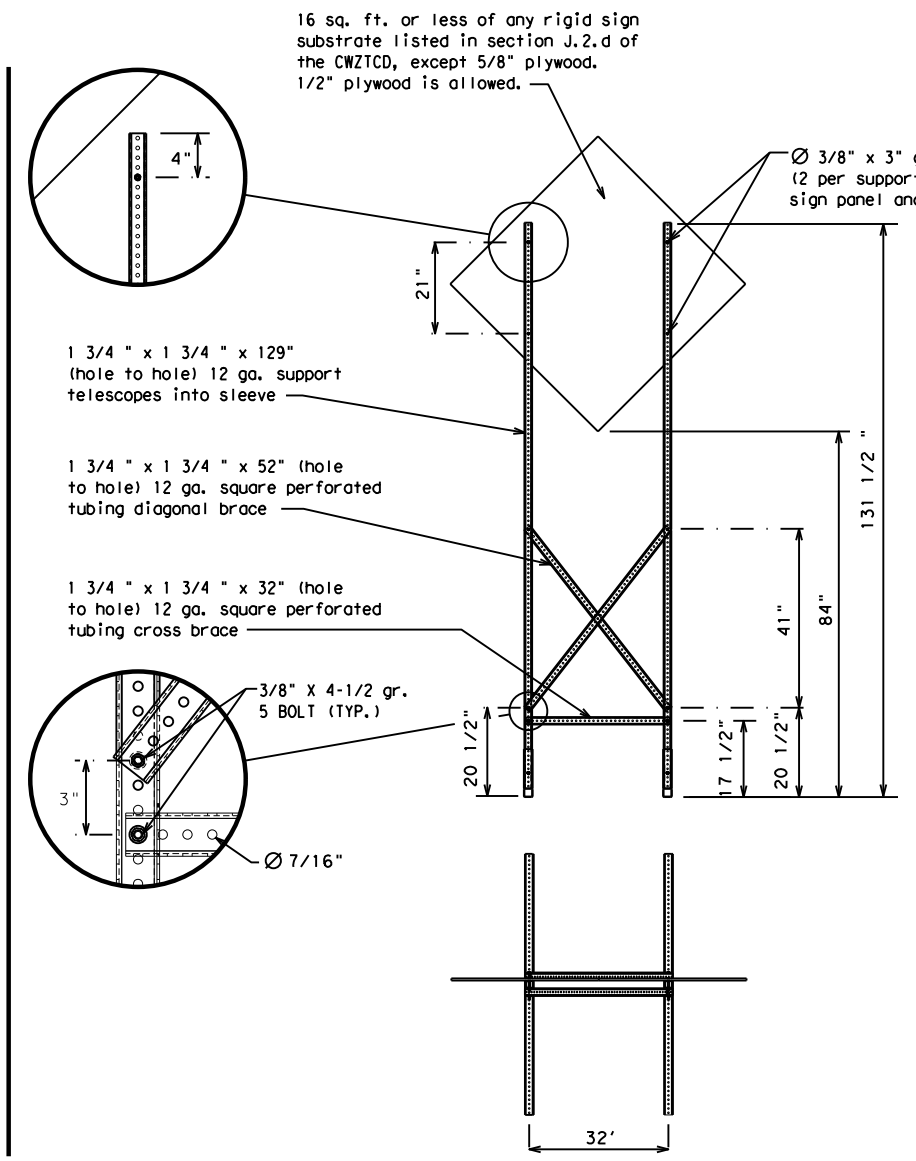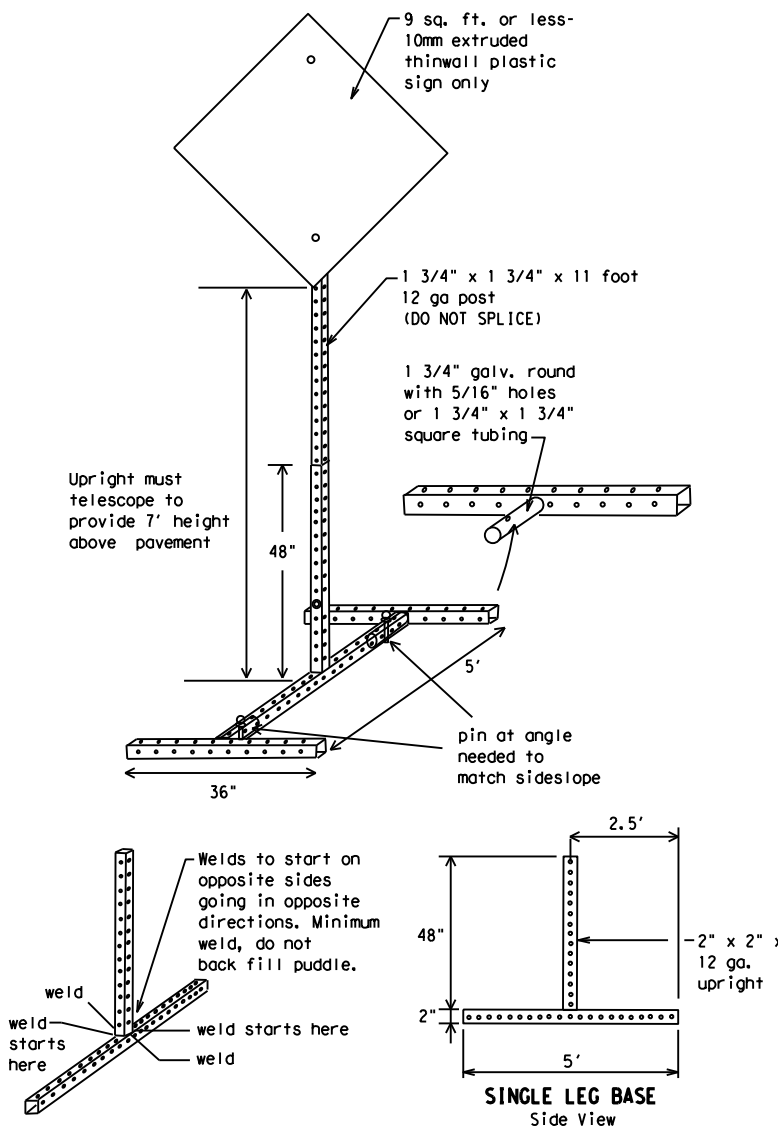

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

WEDGE ANCHORS
Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS
MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

- GENERAL NOTES**
- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
 - No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
 - When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
- * See BC(4) for definition of "Work Duration."
 - ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
 - See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
©TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS	0833	01	009, etc.	FM 217, etc					
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	WACO	Coryell, etc	33					

DATE: 7/6/2023 8:30:18 AM
FILE: c:\txdot\pw_online\txdot3\mgt\aba_babiker\d0577044\bc-21.dgn

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT
RIGHT X LANES CLOSED	RIGHT X LANES OPEN
CENTER LANE CLOSED	DAYTIME LANE CLOSURES
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE
EXIT CLOSED	RIGHT LN TO BE CLOSED
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI
XXXXXXXX BLVD CLOSED	

Other Condition List

ROADWORK XXX FT	ROAD REPAIRS XXXX FT
FLAGGER XXXX FT	LANE NARROWS XXXX FT
RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
DETOUR X MILE	ROUGH ROAD XXXX FT
ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
BUMP XXXX FT	US XXX EXIT X MILES
TRAFFIC SIGNAL XXXX FT	LANES SHIFT *

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT	FORM X LINES RIGHT
DETOUR NEXT X EXITS	USE XXXXX RD EXIT
USE EXIT XXX	USE EXIT I-XX NORTH
STAY ON US XXX SOUTH	USE I-XX E TO I-XX N
TRUCKS USE US XXX N	WATCH FOR TRUCKS
WATCH FOR TRUCKS	EXPECT DELAYS
EXPECT DELAYS	PREPARE TO STOP
REDUCE SPEED XXX FT	END SHOULDER USE
USE OTHER ROUTES	WATCH FOR WORKERS
STAY IN LANE *	

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:18 AM
FILE: c:\txdot\p_w_online\txdot3\mgt\oba_babiker\05077044\bc-21.dgn

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Hour(s)	HR, HRS	Time Minutes	TIME MIN
Information	INFO	Upper Level	UPR LEVEL
It Is	ITS	Vehicles (s)	VEH, VEHS
Junction	JCT	Warning	WARN
Left	LFT	Wednesday	WED
Left Lane	LFT LN	Weight Limit	WT LIMIT
Lane Closed	LN CLOSED	West	W
Lower Level	LWR LEVEL	Westbound	(route) W
Maintenance	MAINT	Wet Pavement	WET PVMT
		Will Not	WONT


Roadway designation # IH-number, US-number, SH-number, FM-number

<h3>BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)</h3>			
<h2>BC (6) - 21</h2>			
FILE:	bc-21.dgn	DN:	TxDOT
© TxDOT	November 2002	CR:	TxDOT
REVISIONS	0833	OW:	TxDOT
9-07	8-14	HW:	HIGHWAY
7-13	5-21	CONT	SECT
		JOB	009, etc.
		FW	217, etc
		DIST	WACO
		COUNTY	Coryell, etc
		SHEET NO.	34

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:30:19 AM
 FILE: c:\txdot\p_w_online\txdot3\mognatoba_babiker\g0577044\bc-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

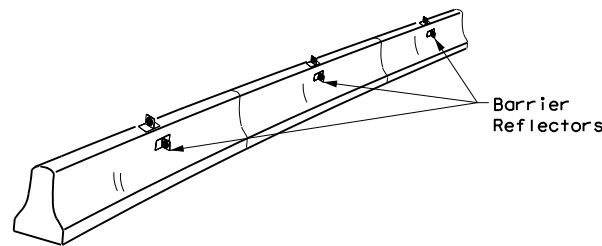

CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

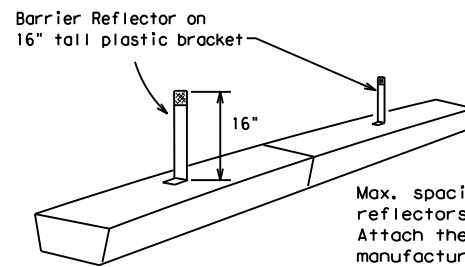


LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

LOW PROFILE CONCRETE BARRIER (LPCB)

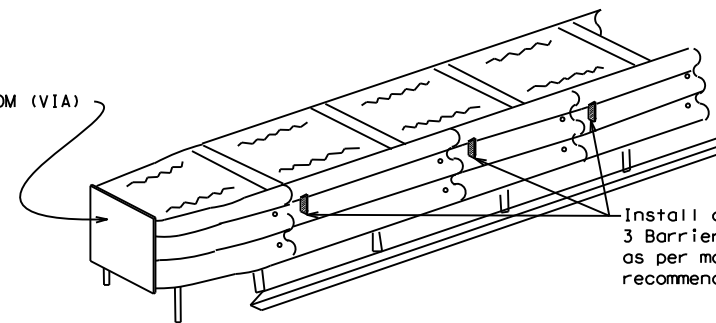

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

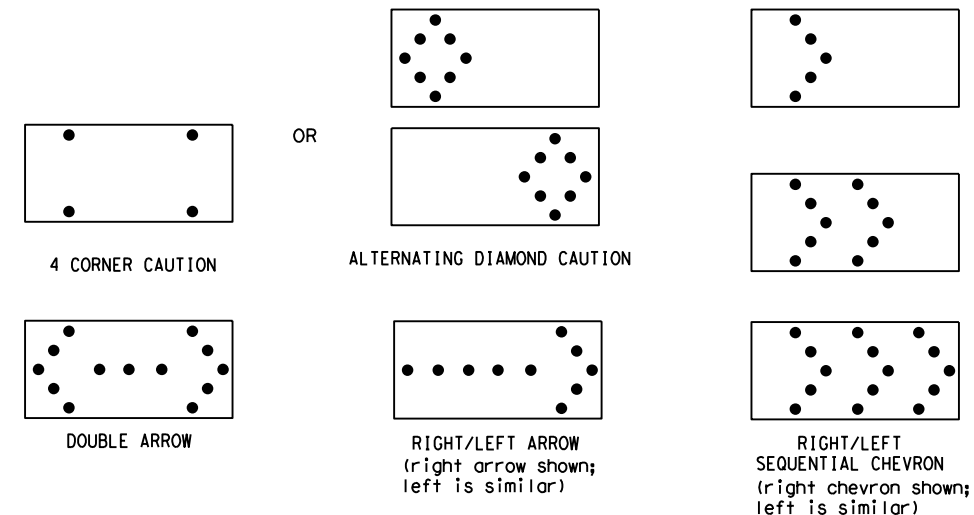

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.

Texas Department of Transportation
 Traffic Safety Division Standard

**BARRICADE AND CONSTRUCTION
 ARROW PANEL, REFLECTORS,
 WARNING LIGHTS & ATTENUATOR**

BC (7) -21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS		0833	01	009, etc.
9-07	8-14			FM 217, etc
7-13	5-21	DIST	COUNTY	SHEET NO.
		WACO	Coryell, etc	35

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:19 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0577044\bc-21.dgn

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:




- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST


- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

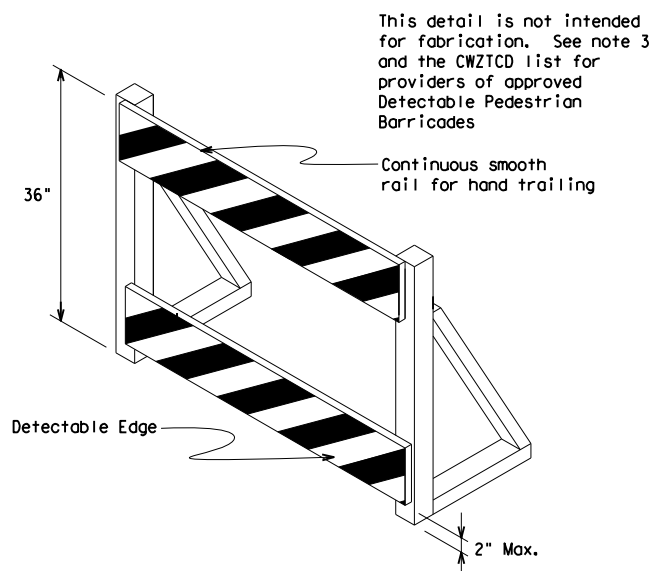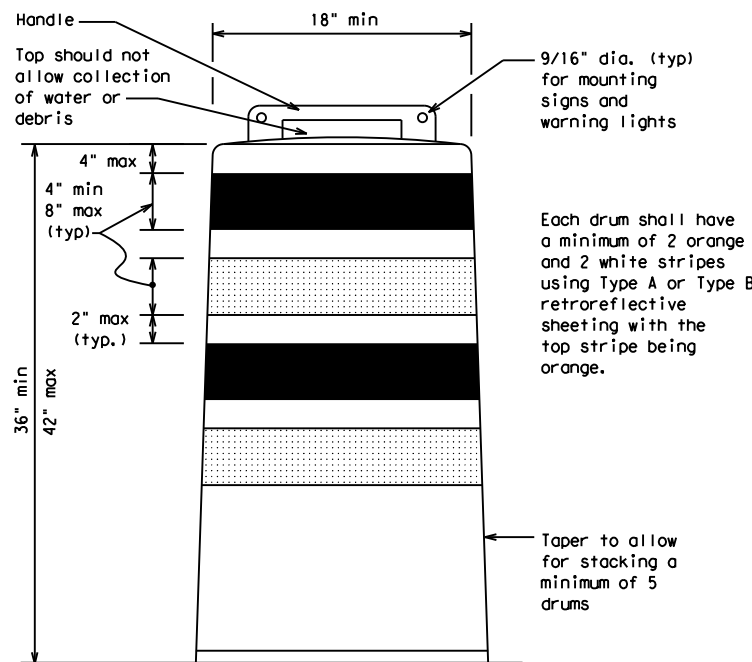


This detail is not intended for fabrication. See note 3 and the CWZTCD list for providers of approved Detectable Pedestrian Barricades

DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign
(Maximum Sign Dimension)
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel
mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (8) - 21


FILE: bc-21.dgn	DW: TxDOT	CR: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
4-03 8-14	DIST	COUNTY		SHEET NO.
9-07 5-21	WACO	Coryell, etc		36
7-13				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

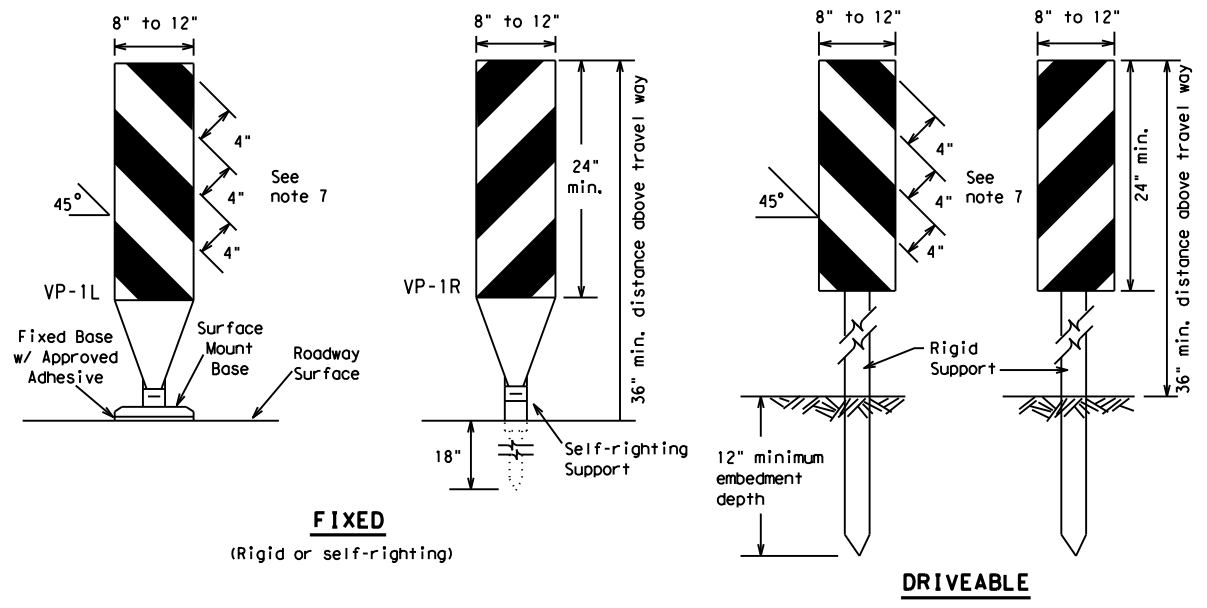

FIXED
(Rigid or self-righting)


DRIVEABLE

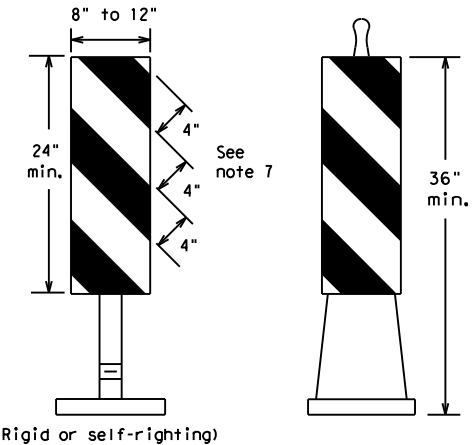

PORTABLE

VERTICAL PANELS (VPs)


- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

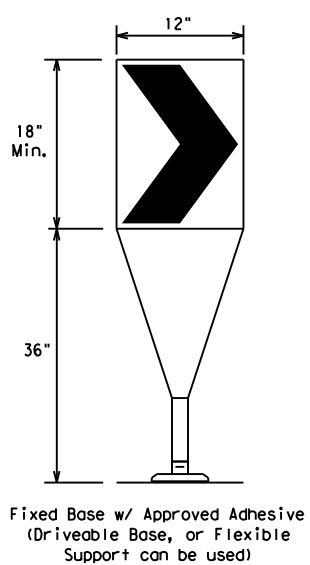

Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS



LONGITUDINAL CHANNELIZING DEVICES (LCD)


- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

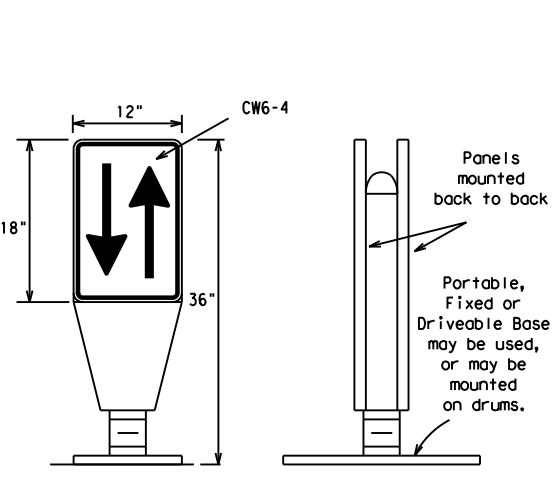

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)

- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths * *			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

* * * Taper lengths have been rounded off.
L=Length of Taper (FT.) W=Width of Offset (FT.)
S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (9) - 21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WACO	Coryell, etc	37	

DATE: 7/6/2023 8:30:19 AM
FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0577044\bc-21.dgn


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:19 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0577044\bc-21.dgn


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.

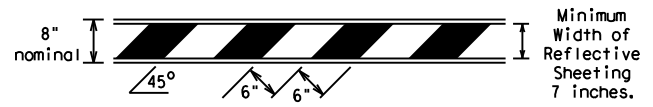


TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

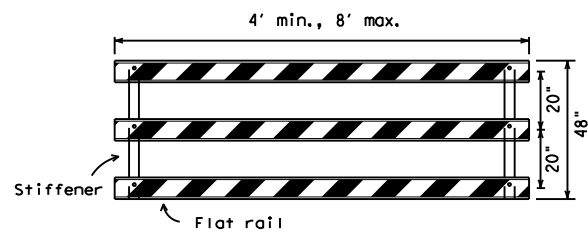


Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

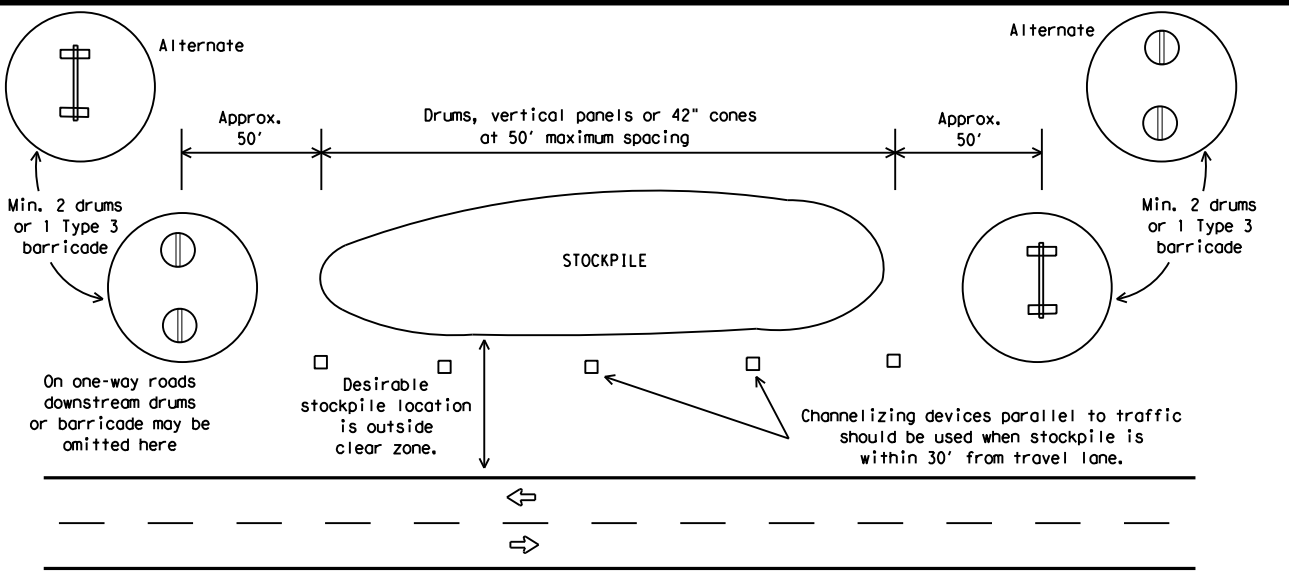

TRAFFIC CONTROL FOR MATERIAL STOCKPILES


Each roadway of a divided highway shall be barricaded in the same manner.

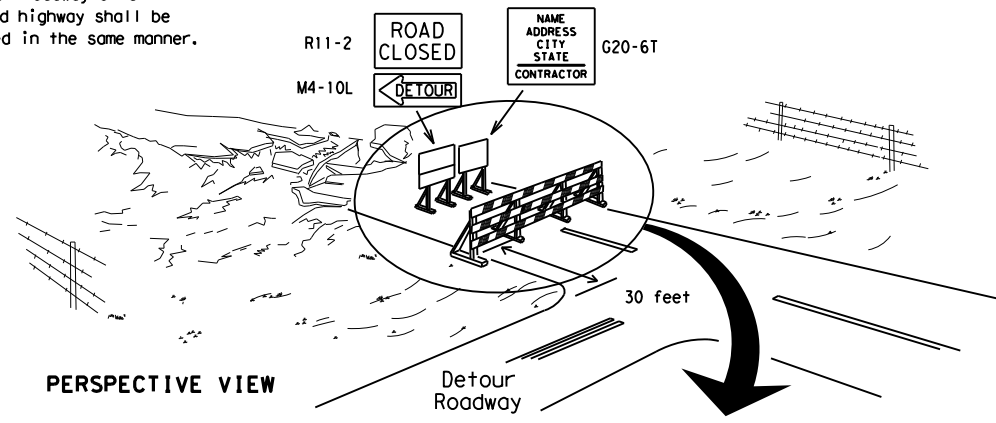

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

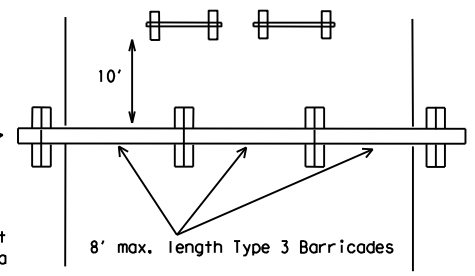


PLAN VIEW

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

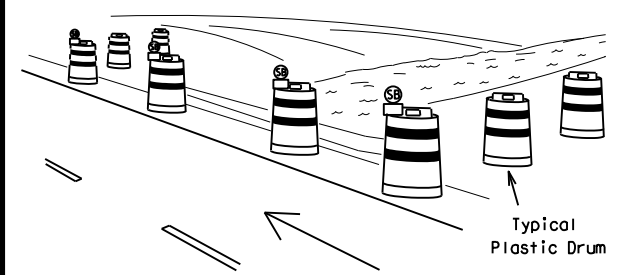

PERSPECTIVE VIEW

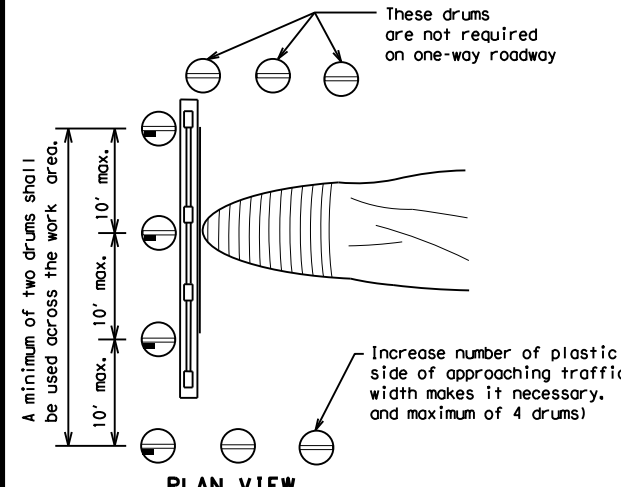


PLAN VIEW

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

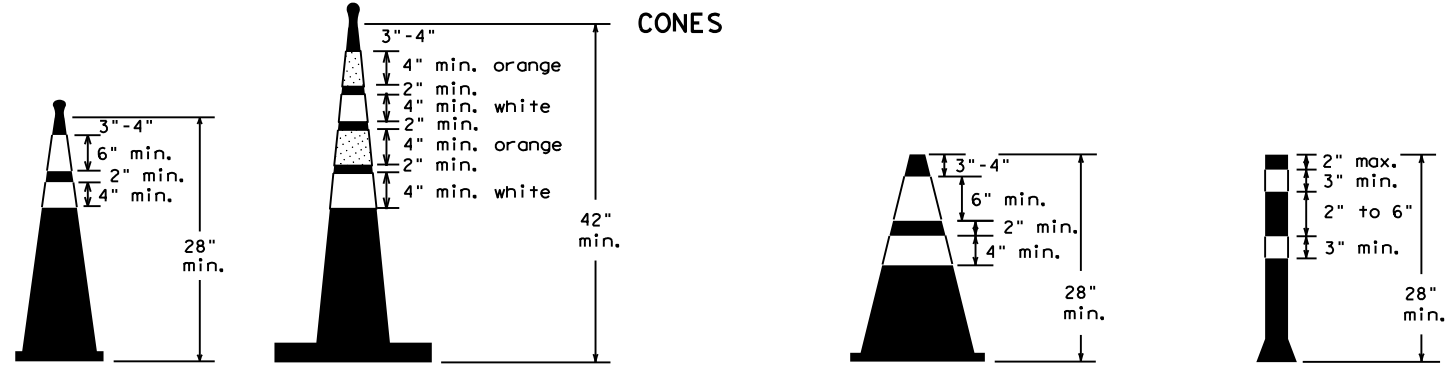

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (10) - 21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
©TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WACO	Coryell, etc	38	

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

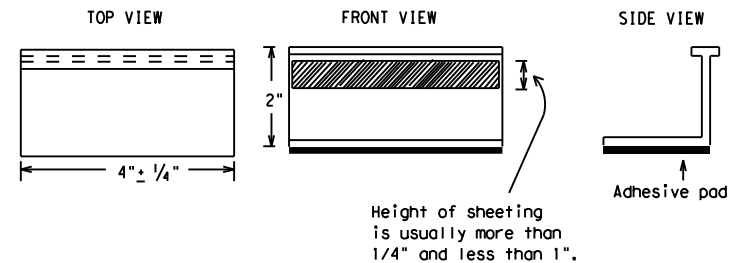

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS


BC(11)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS		0833 01 009, etc. FM 217, etc		
2-98 9-07 5-21	DIST	COUNTY	SHEET NO.	
1-02 7-13	WACO	Coryell, etc	39	
11-02 8-14				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:20 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0577044\bc-21.dgn

PAVEMENT MARKING PATTERNS

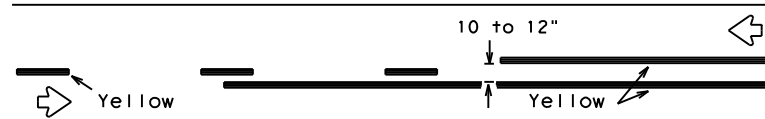


REFLECTORIZED PAVEMENT MARKINGS - PATTERN A

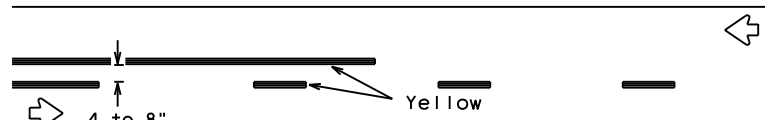


REFLECTORIZED PAVEMENT MARKINGS - PATTERN B

Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.

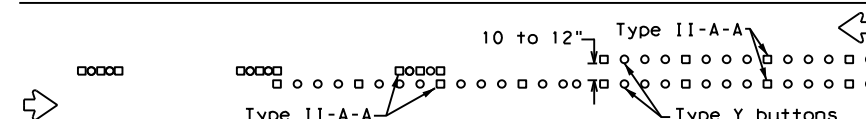


RAISED PAVEMENT MARKERS - PATTERN A

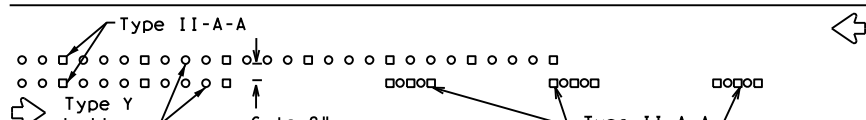


RAISED PAVEMENT MARKERS - PATTERN B

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

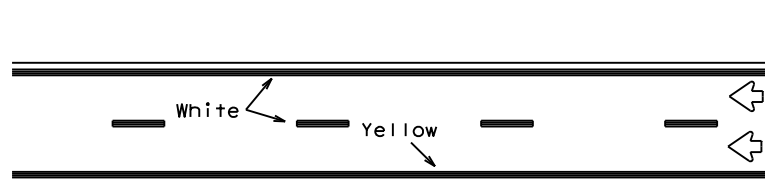

REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

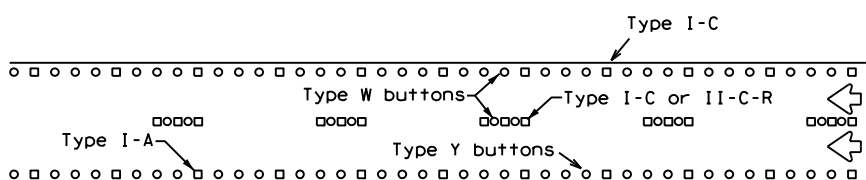


RAISED PAVEMENT MARKERS

EDGE & LANE LINES FOR DIVIDED HIGHWAY




REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectORIZED pavement markings.

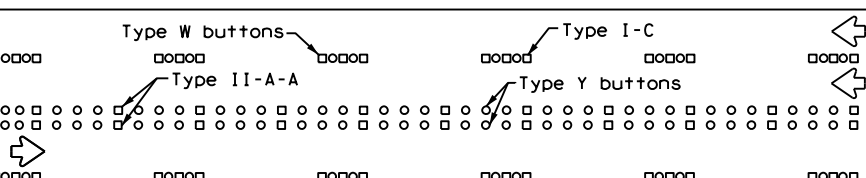


RAISED PAVEMENT MARKERS

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

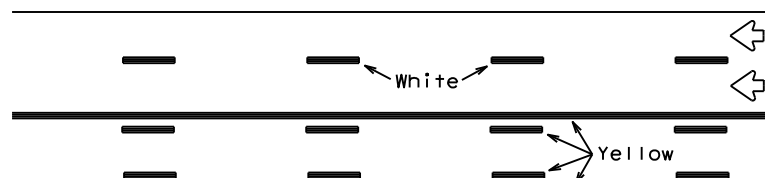

REFLECTORIZED PAVEMENT MARKINGS


Prefabricated markings may be substituted for reflectORIZED pavement markings.

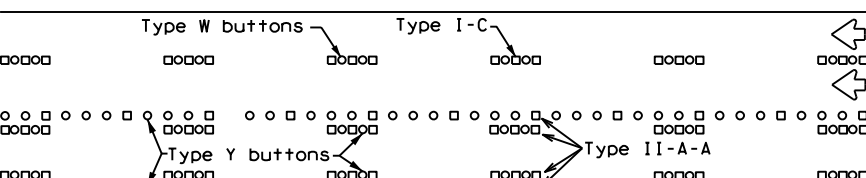




RAISED PAVEMENT MARKERS

TWO-WAY LEFT TURN LANE


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

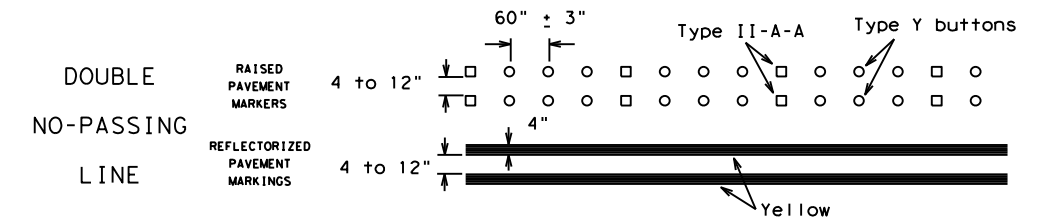

SOLID LINES

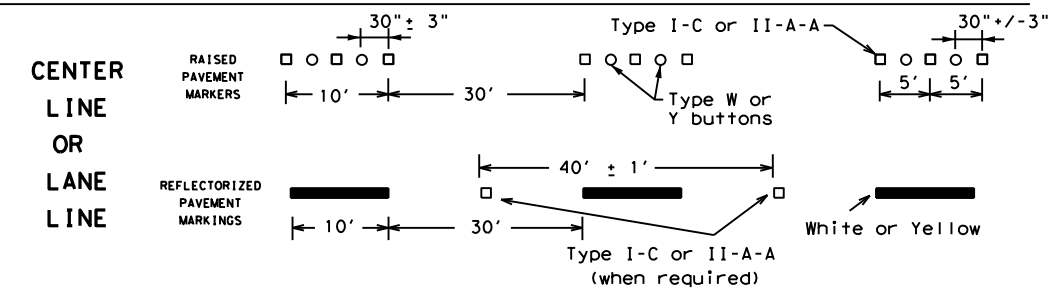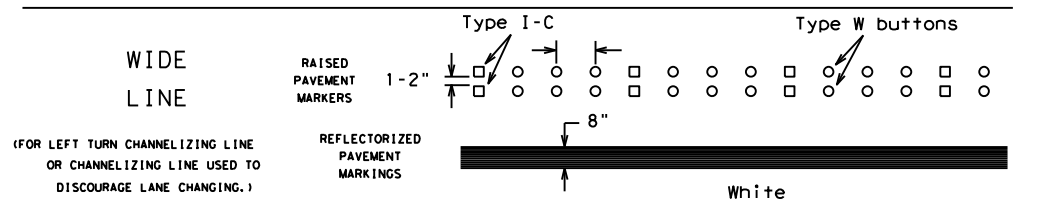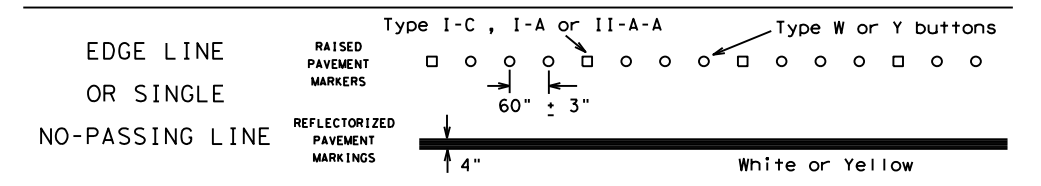


BROKEN LINES

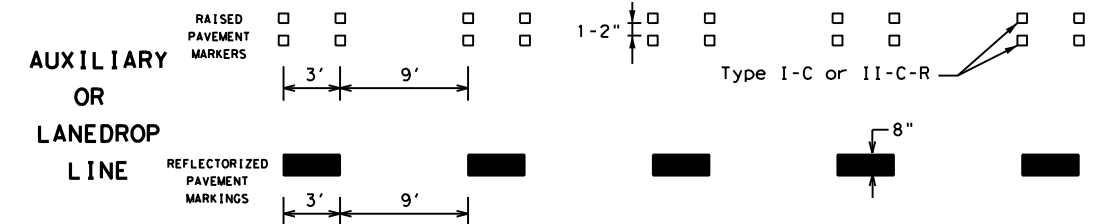

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

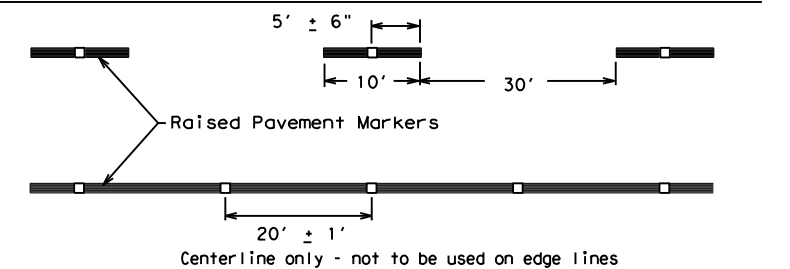

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
1-97 9-07 5-21				
2-98 7-13				
11-02 8-14	DIST	COUNTY	SHEET NO.	
	WACO	Coryell, etc	40	


Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TXDOT for any purpose whatsoever. TXDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:30:20 AM
FILE: c:\txdot\pw_online\txdot3\mgt\mgtaba_babiker\d0577044\bc-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:30:25 AM
 FILE: c:\txdot\pw_online\txdot3\mogtaba_babiker\0577044\tcp3-1.dgn

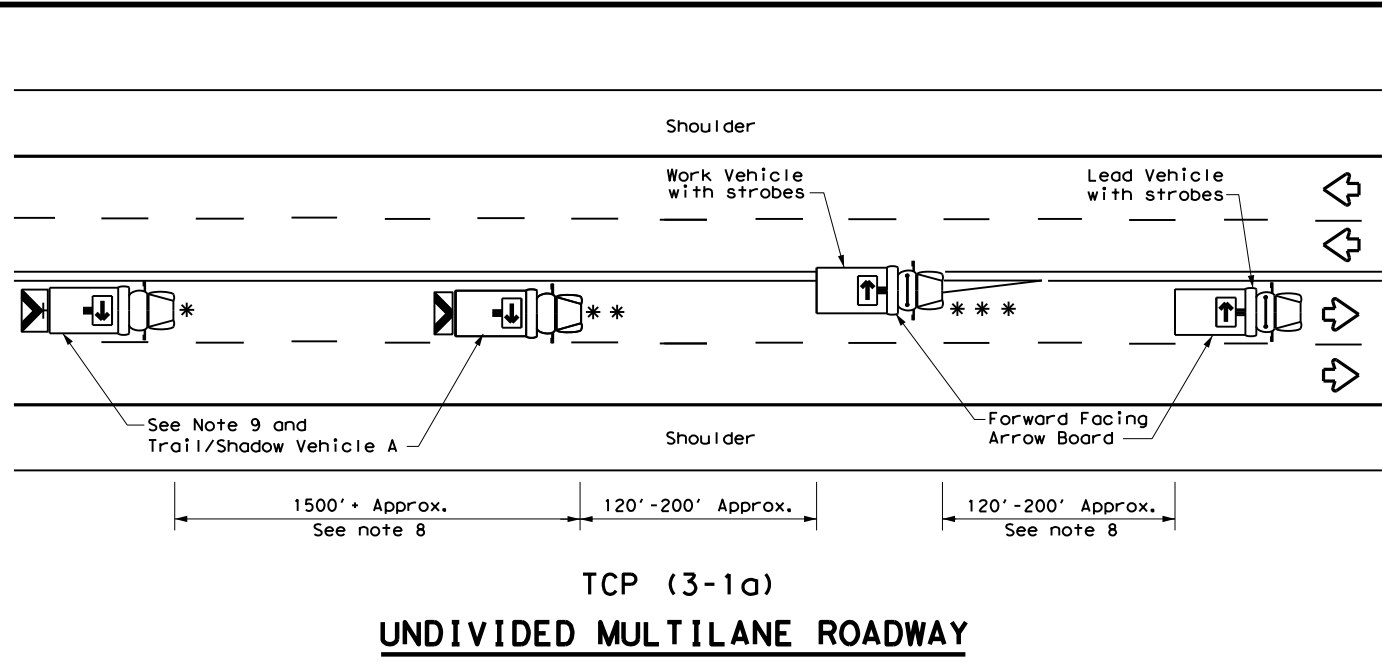


TCP (3-1a)
UNDIVIDED MULTILANE ROADWAY

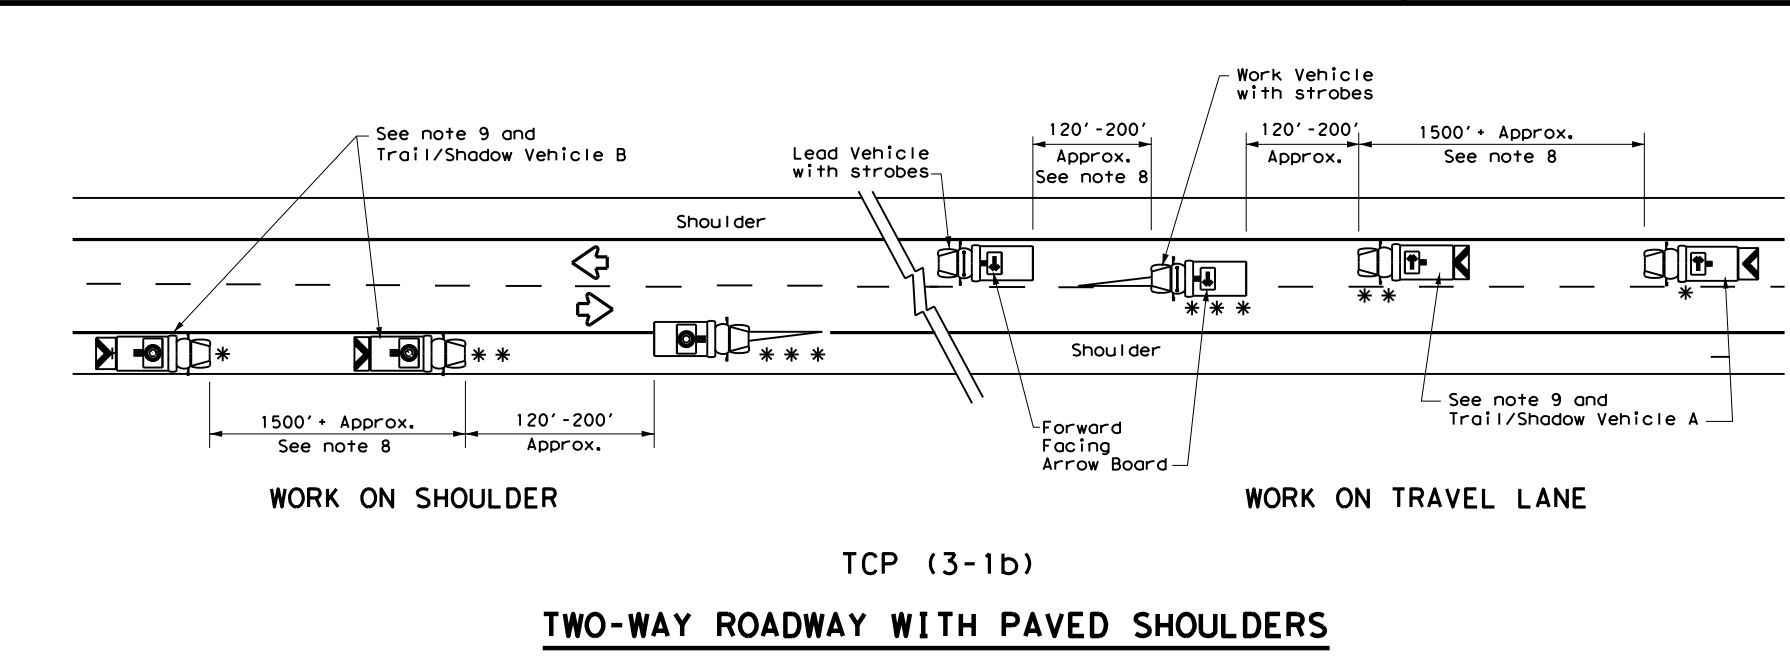


TCP (3-1b)
TWO-WAY ROADWAY WITH PAVED SHOULDERS

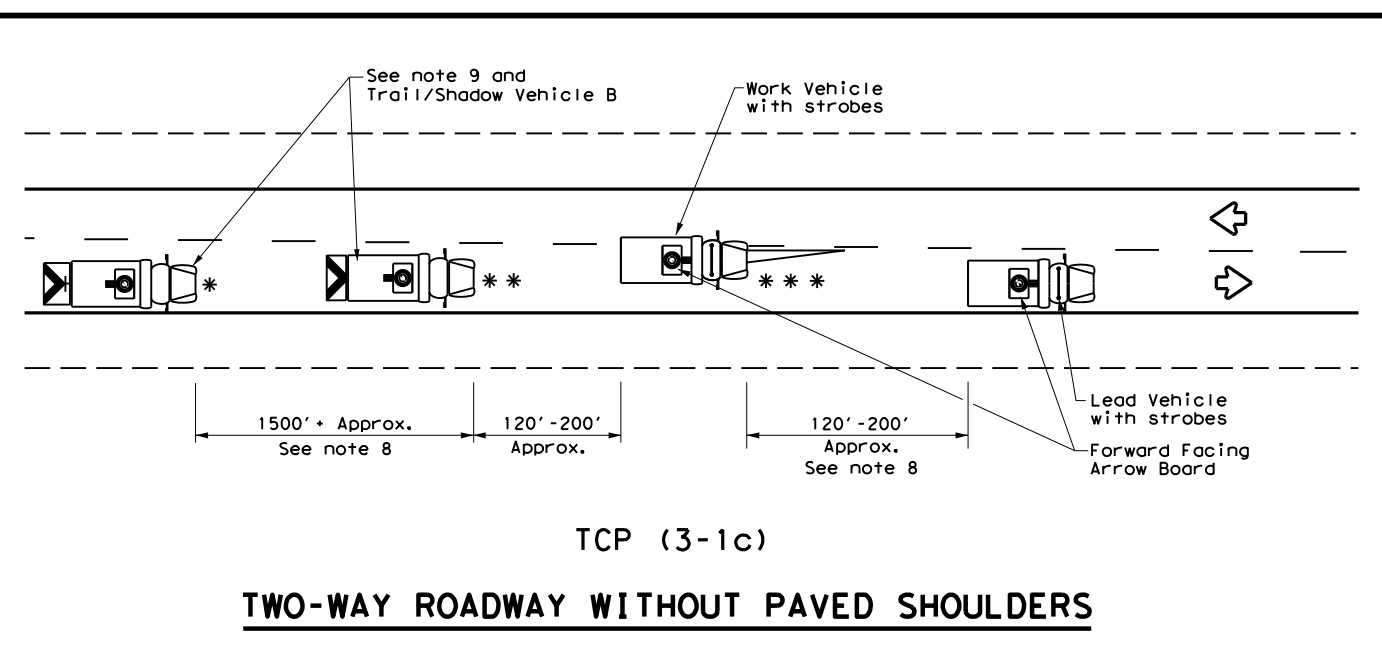

TCP (3-1c)
TWO-WAY ROADWAY WITHOUT PAVED SHOULDERS

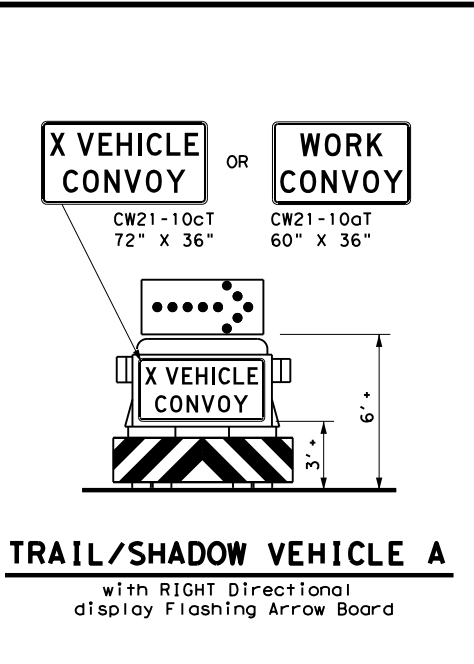

TRAIL/SHADOW VEHICLE A
 with RIGHT Directional display Flashing Arrow Board

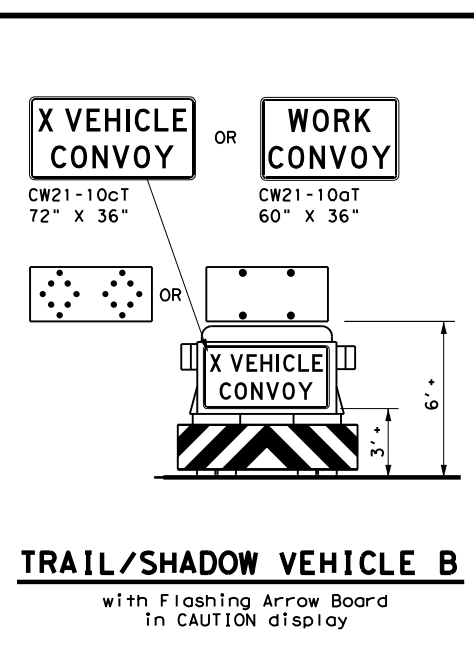


TRAIL/SHADOW VEHICLE B
 with Flashing Arrow Board in CAUTION display

LEGEND			
*	Trail Vehicle	ARROW BOARD DISPLAY	
**	Shadow Vehicle		
***	Work Vehicle		RIGHT Directional
	Heavy Work Vehicle		LEFT Directional
	Truck Mounted Attenuator (TMA)		Double Arrow
	Traffic Flow		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

GENERAL NOTES

1. TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used the WORK vehicle must be equipped with an arrow board. The Engineer will determine if the LEAD VEHICLE and/or TRAIL VEHICLE are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
2. The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
3. The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE and TRAIL VEHICLE are required.
4. Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
5. Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
6. Each vehicle shall have two-way radio communication capability.
7. When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
8. Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
9. "X VEHICLE CONVOY" (CW21-10cT) or "WORK CONVOY" (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" X 48" diamond shaped "WORK CONVOY" (CW21-10T) or "X VEHICLE CONVOY" (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The "X VEHICLE CONVOY" sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
10. On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a "DO NOT PASS" (R4-1) sign should be placed on the back of the rearmost protection vehicle.

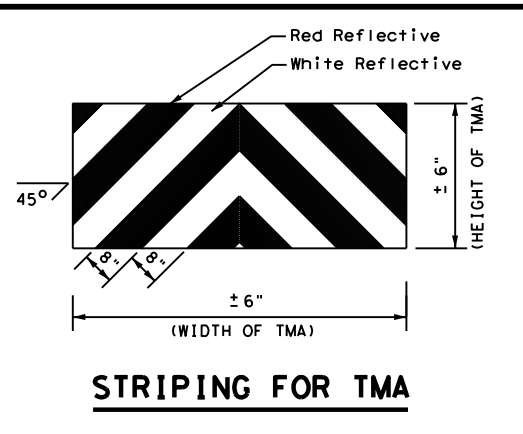

STRIPING FOR TMA









Texas Department of Transportation
 Traffic Operations Division Standard

**TRAFFIC CONTROL PLAN
 MOBILE OPERATIONS
 UNDIVIDED HIGHWAYS**

TCP (3-1) - 13

FILE: tcp3-1.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 7-13	WACO	Coryell, etc	41	
1-97				

DATE: 7/6/2023 8:30:28 AM
 FILE: c:\txdot\p_w_online\txdot3\mogtaba_babiker\d0577044\tcp3-3.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

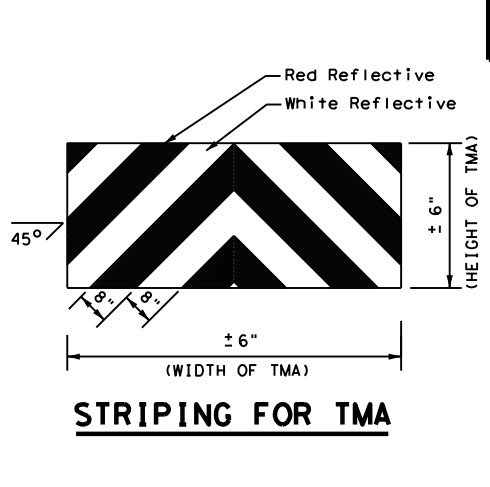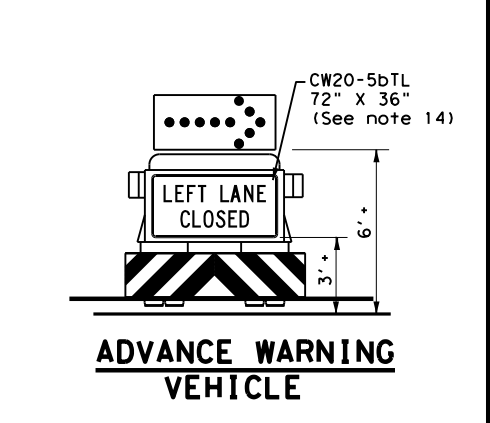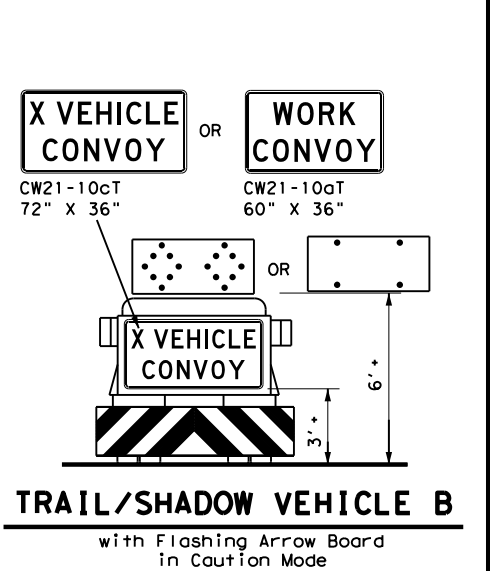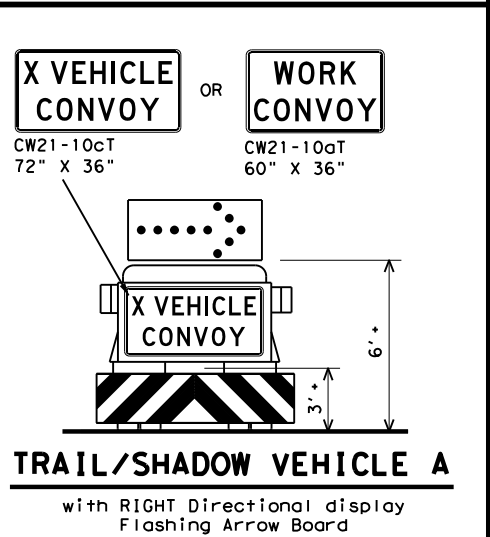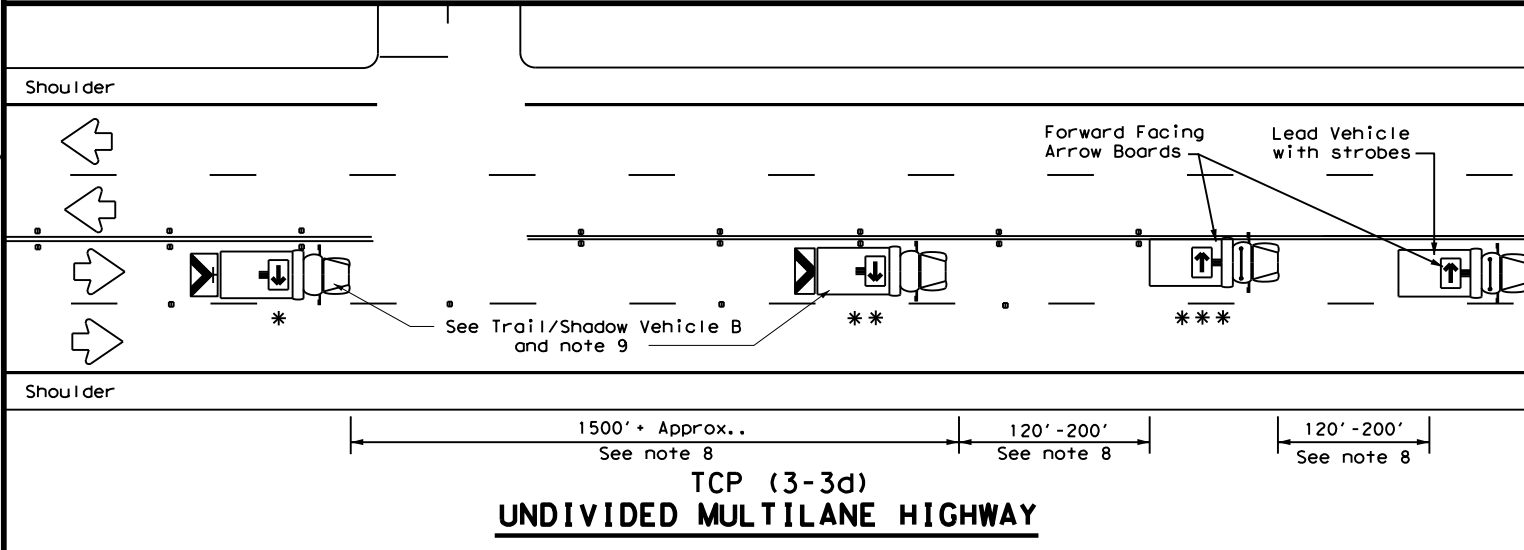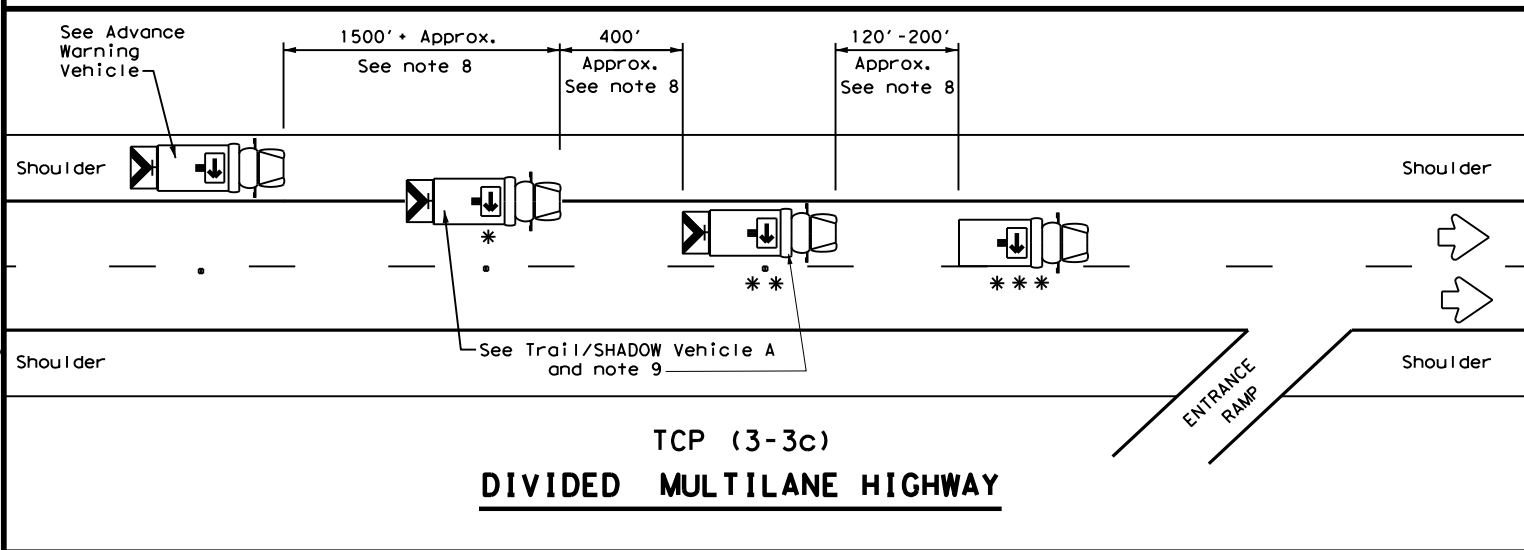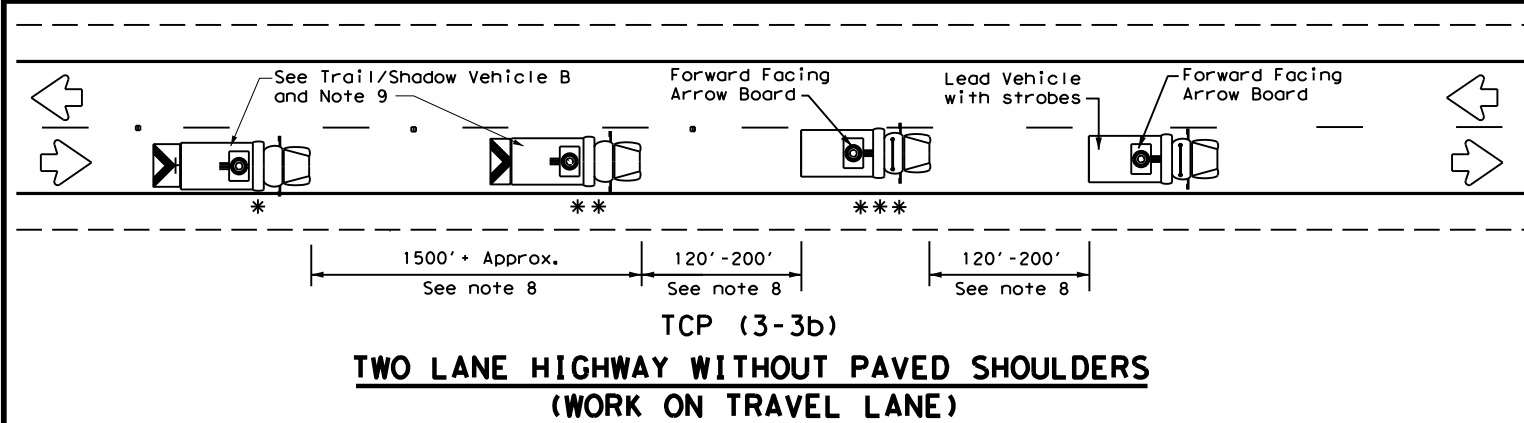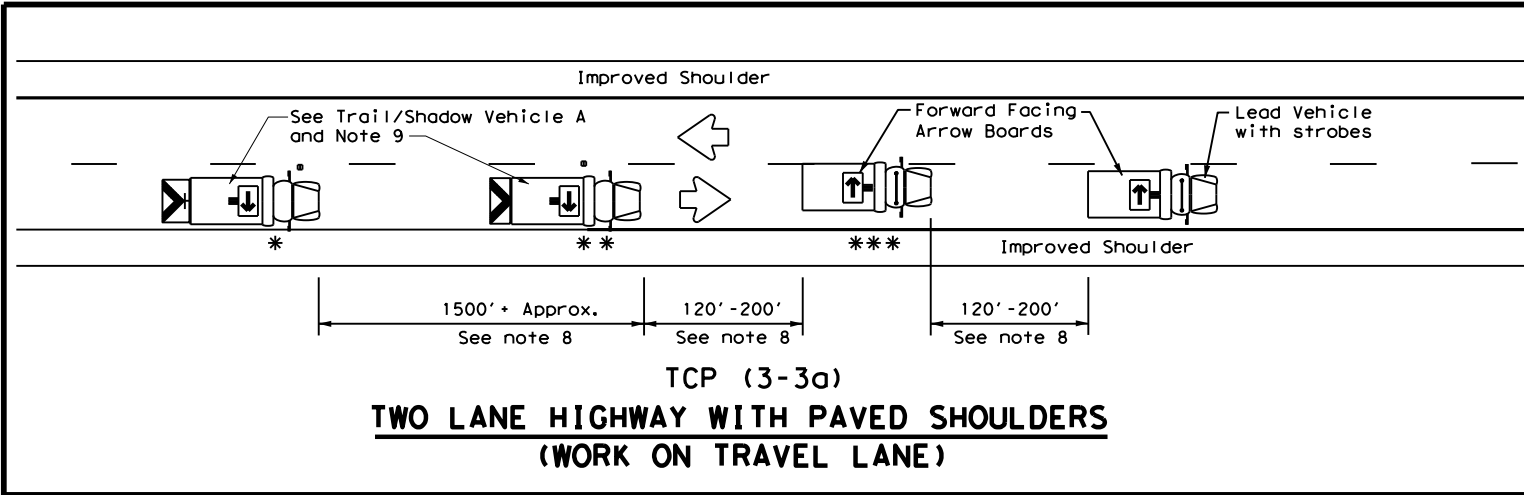

LEGEND		
* Trail Vehicle		ARROW BOARD DISPLAY
** Shadow Vehicle		
*** Work Vehicle		RIGHT Directional
		LEFT Directional
		Double Arrow
		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
✓				

GENERAL NOTES

- TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
- The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING and TRAIL VEHICLE are required.
- Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
- Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
- Each vehicle shall have two-way radio communication capability.
- When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
- Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
- X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
- For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
- A double arrow shall not be displayed on the arrow board on the Advance Warning Vehicle.
- For divided highways with three or four lanes in each direction, use TCP(3-2).
- Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
- The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes it necessary.
- On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.


Texas Department of Transportation
 Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
MOBILE OPERATIONS
RAISED PAVEMENT
MARKER INSTALLATION/
REMOVAL
TCP (3-3) - 14


FILE: tcp3-3.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT September 1987	CONT	SECT	JOB	HIGHWAY
2-94 4-98	0833	01	009, etc.	FM 217, etc
8-95 7-13	DIST	COUNTY		SHEET NO.
1-97 7-14	WACO	Coryell, etc		42

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:35 AM
 FILE: c:\txdot\p_w_online\txdot3\mgt\oba_babiker\d0577044\tcpsc-1-22.dgn

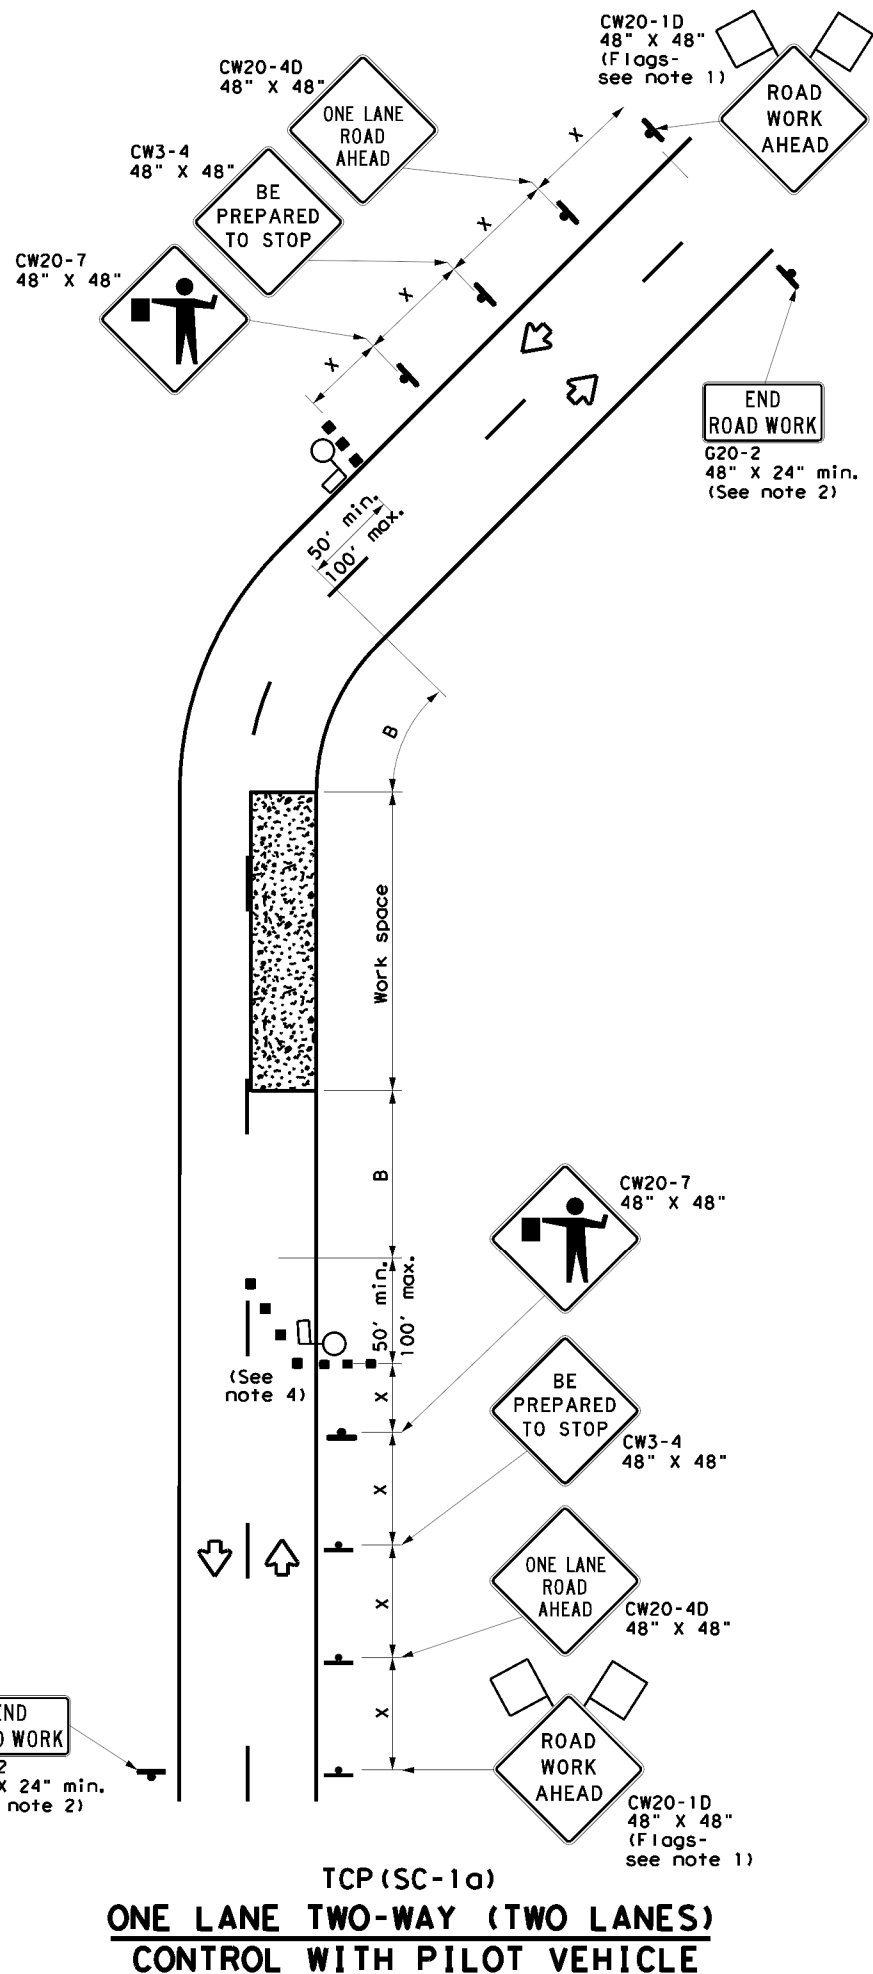

TCP (SC-1a)
**ONE LANE TWO-WAY (TWO LANES)
 CONTROL WITH PILOT VEHICLE**

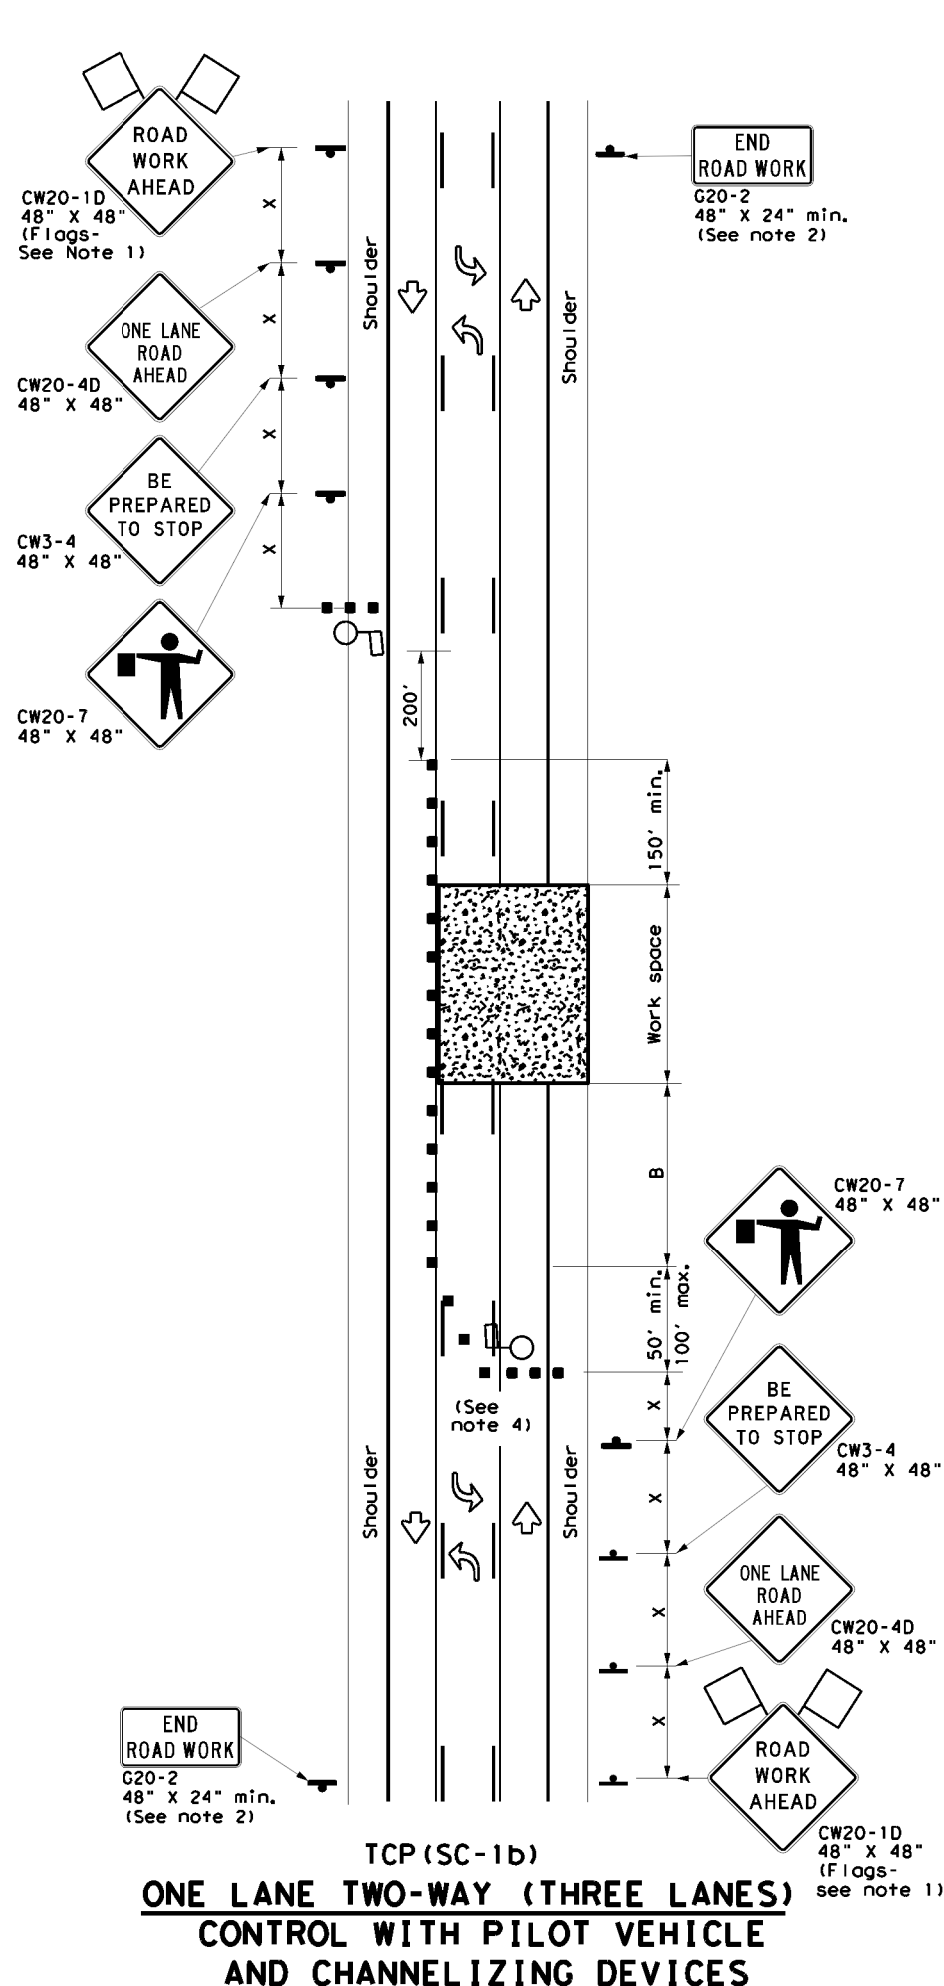

TCP (SC-1b)
**ONE LANE TWO-WAY (THREE LANES)
 CONTROL WITH PILOT VEHICLE
 AND CHANNELIZING DEVICES**

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "x"	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT) S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
- Sign spacing may be increased or an additional ROAD WORK AHEAD (CW20-1D) sign may be used if advance warning ahead of the flagger sign is less than 1500 feet.
- Flaggers should use two-way radios or other methods of communication at all times for traffic control coordination.
- Flaggers should use 24" STOP (CW20-8) / SLOW (CW20-8aT) paddles to control traffic. Flags should be limited to emergency situations.
- If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
- If the seal coat operation crosses intersections, traffic in these areas must be controlled. Care must be taken to prevent vehicles from crossing the asphalt before the aggregate is placed. This may require positioning additional traffic control personnel (flaggers) at the intersection.
- Temporary rumble strips are not required on seal coat operations.
- The pilot car is used to guide vehicles through traffic control zone. The pilot car shall have an identification name displayed and PILOT CAR, FOLLOW ME (G20-4) sign or message board mounted in a conspicuous position on rear.

TCP (SC-1a)




- Channelizing devices on the centerline are not required when a pilot car is leading traffic, unless directed by the Engineer.

SHEET 1 OF 8

		Traffic Safety Division Standard	
TRAFFIC CONTROL PLAN SEAL COAT OPERATIONS ONE-LANE TWO-WAY			
TCP (SC-1) - 22			
FILE: tcpsc-1-22.dgn	DWG: October 2022	CK: JOB	CHK: HIGHWAY
© TxDOT	REVISIONS	0833 01	009, etc. FM 217, etc
4-21		DIST	COUNTY
10-22		WACO	Coryell, etc
			SHEET NO. 43

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:41 AM
 FILE: c:\txdot\pw_online\txdot3\nogroba, bob\iker\0577044\cpssc-2-22.dgn

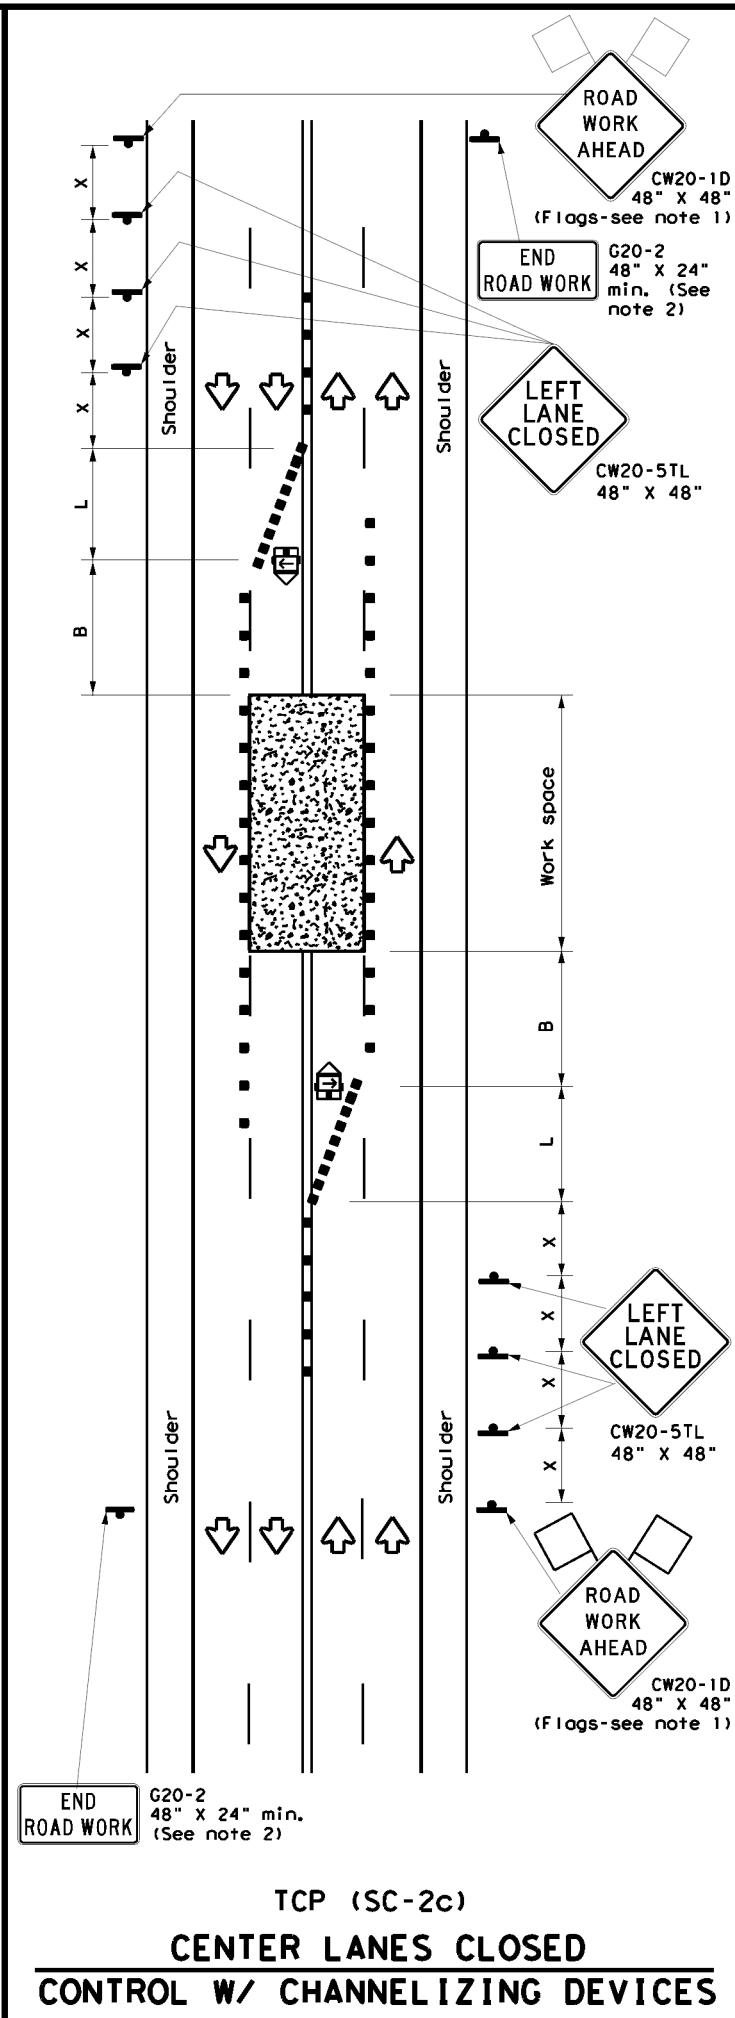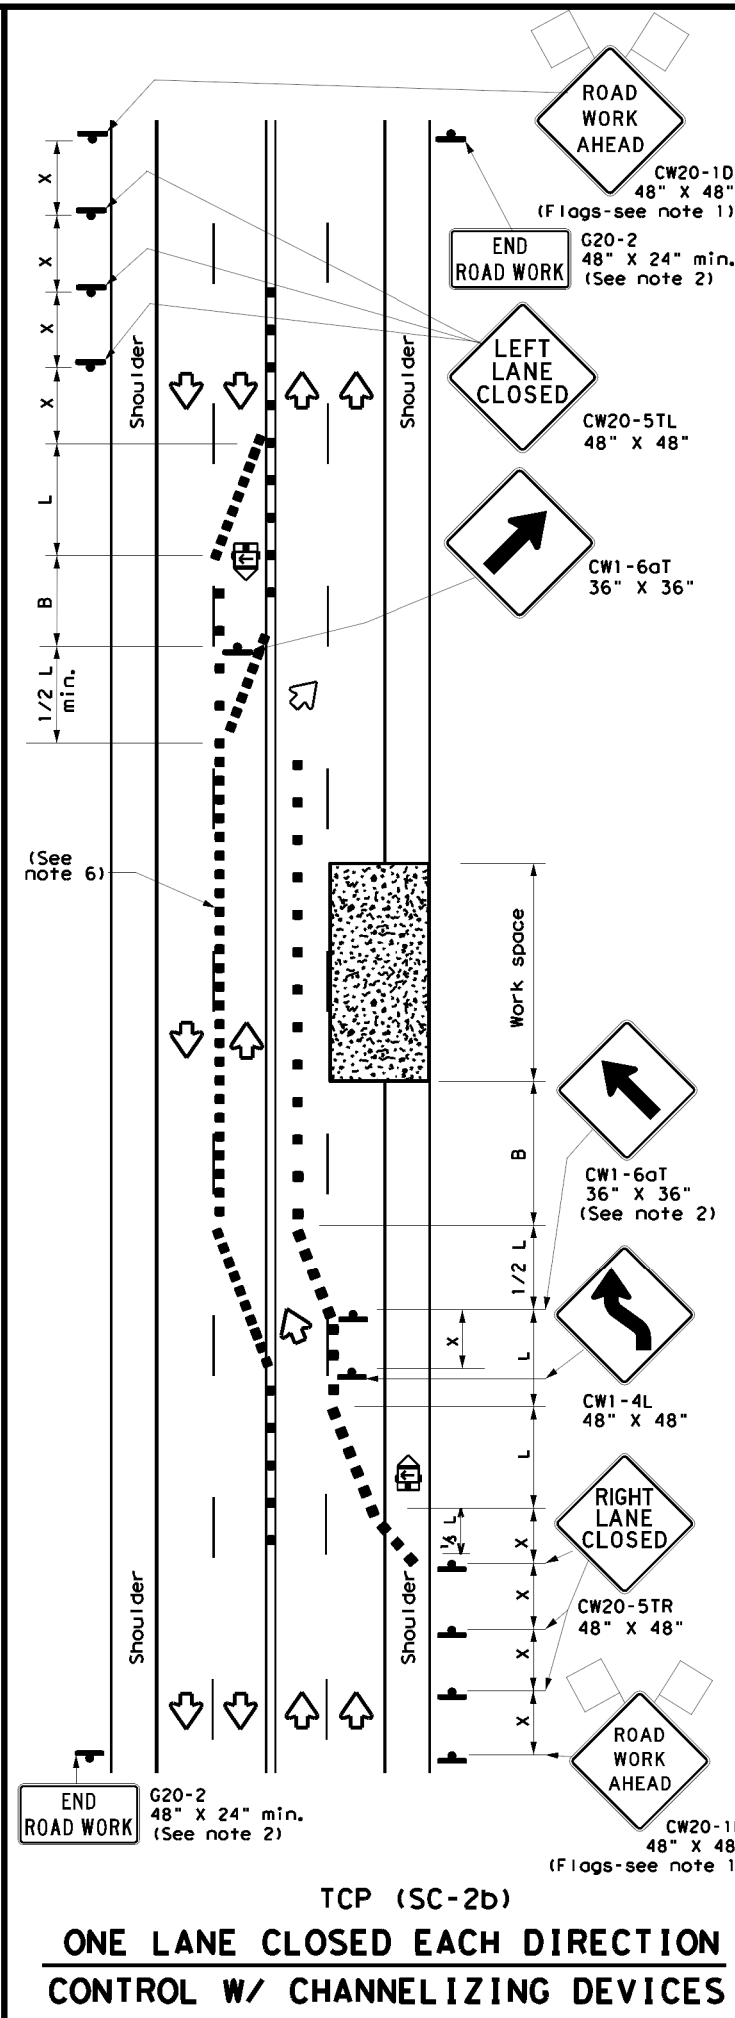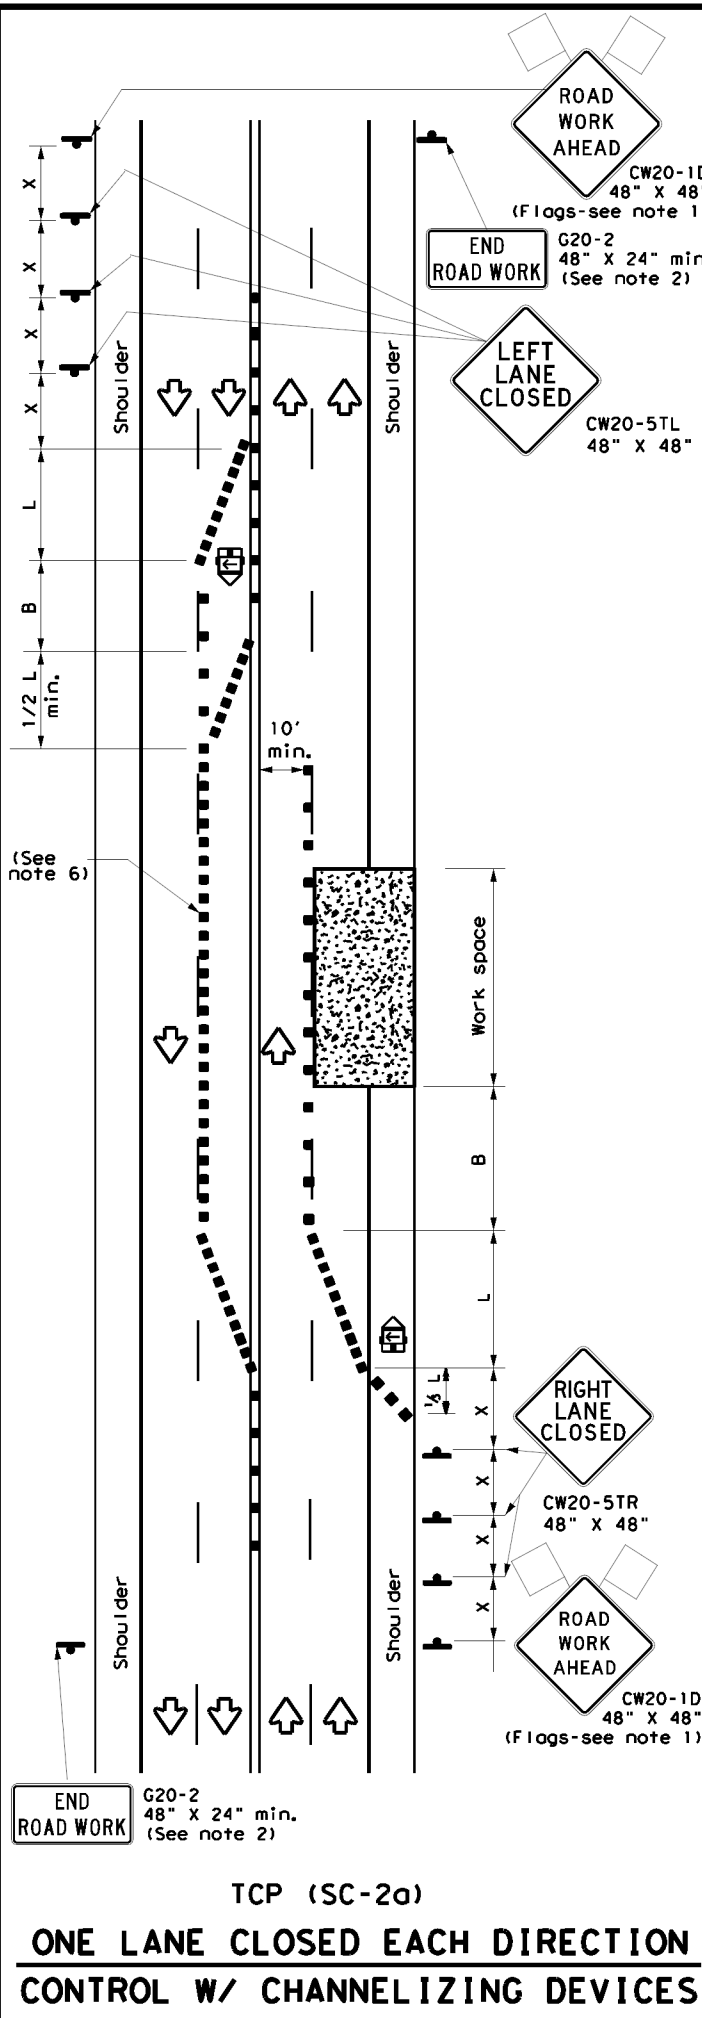

LEGEND

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "X"	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
 - The ROAD WORK AHEAD (CW20-1D) sign may be repeated if the visibility of the work zone is less than 1500 feet.
 - If the seal coat operation crosses intersections, traffic in these areas must be controlled. Care must be taken to prevent vehicles from crossing the asphalt before the aggregate is placed. This may require positioning additional traffic control personnel (flaggers) at the intersection.
 - Temporary rumble strips are not required on seal coat operations.
- TCP (SC-2a) and (SC-2b)**
- Channelizing devices which separate two-way traffic shall be spaced on tapers at:
 - 20 feet;
 - 15 feet when posted speeds are 35 mph or slower; or
 - at 1/2(S) for tangent sections.
 This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.

SHEET 2 OF 8




Texas Department of Transportation
 Traffic Safety Division Standard

TRAFFIC CONTROL PLAN
SEALCOAT OPERATIONS
MULTILANE ROADS
(UNDIVIDED)
TCP (SC-2) -22

FILE: tcpssc-2-22.dgn	DATE: October 2022	CONTRACT: 0833 01	JOB: 009, etc. FM 217, etc
REVISIONS: 4-21, 10-22	DIST: WACO	COUNTY: Coryell, etc	SHEET NO.: 44

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:47 AM
 FILE: c:\txdot\pw_online\txdot3\mgt\oba_babiker\d0577044\tcpsc-3-22.dgn

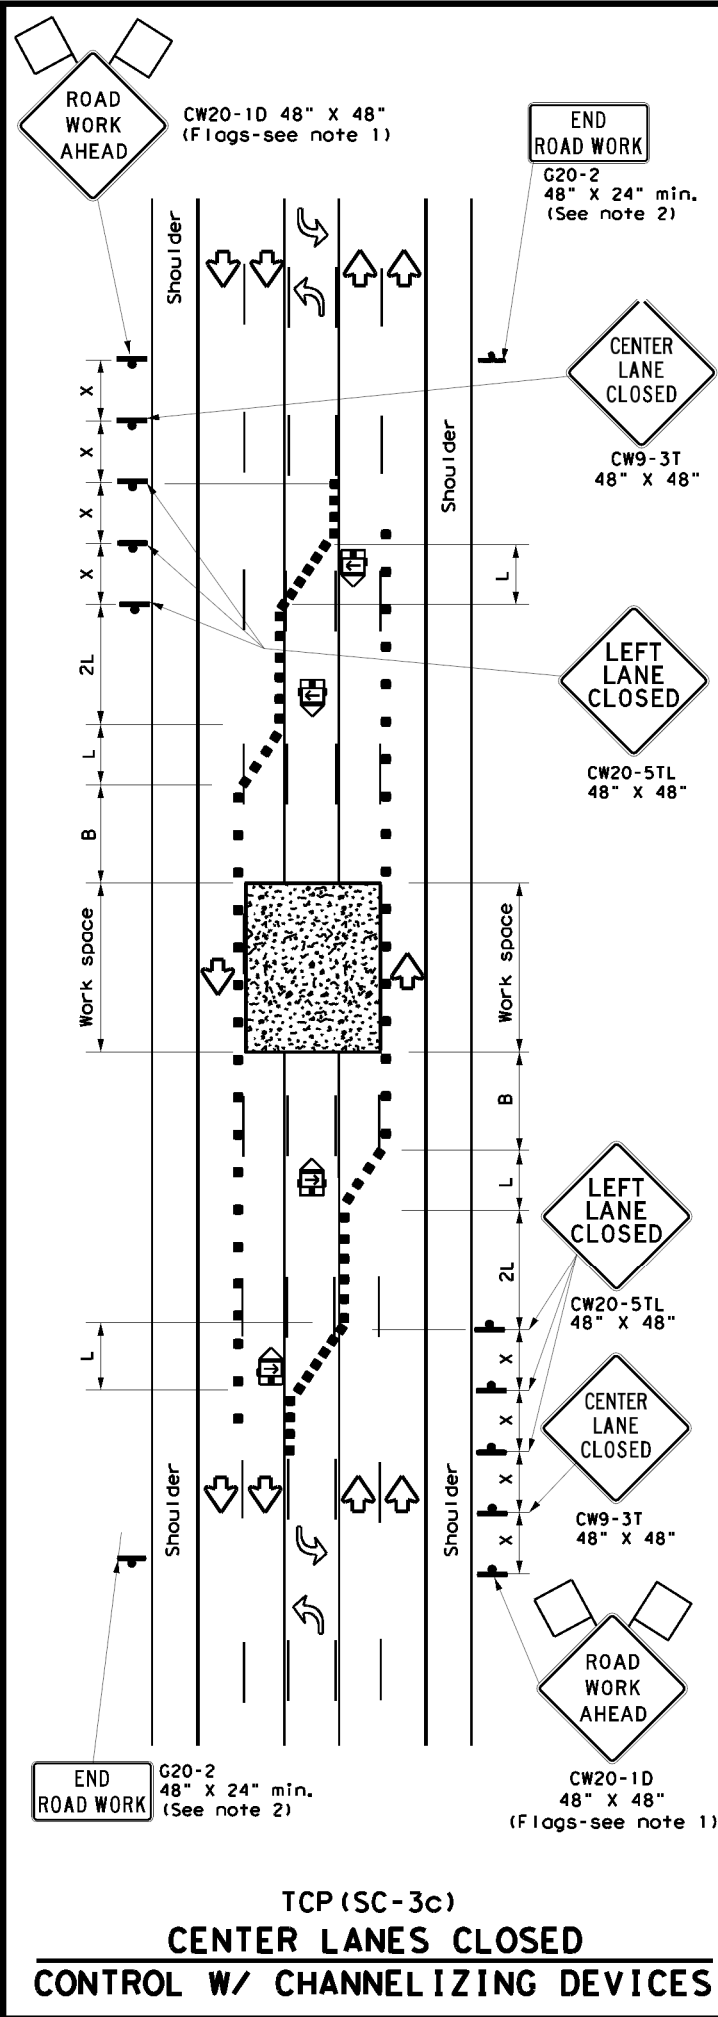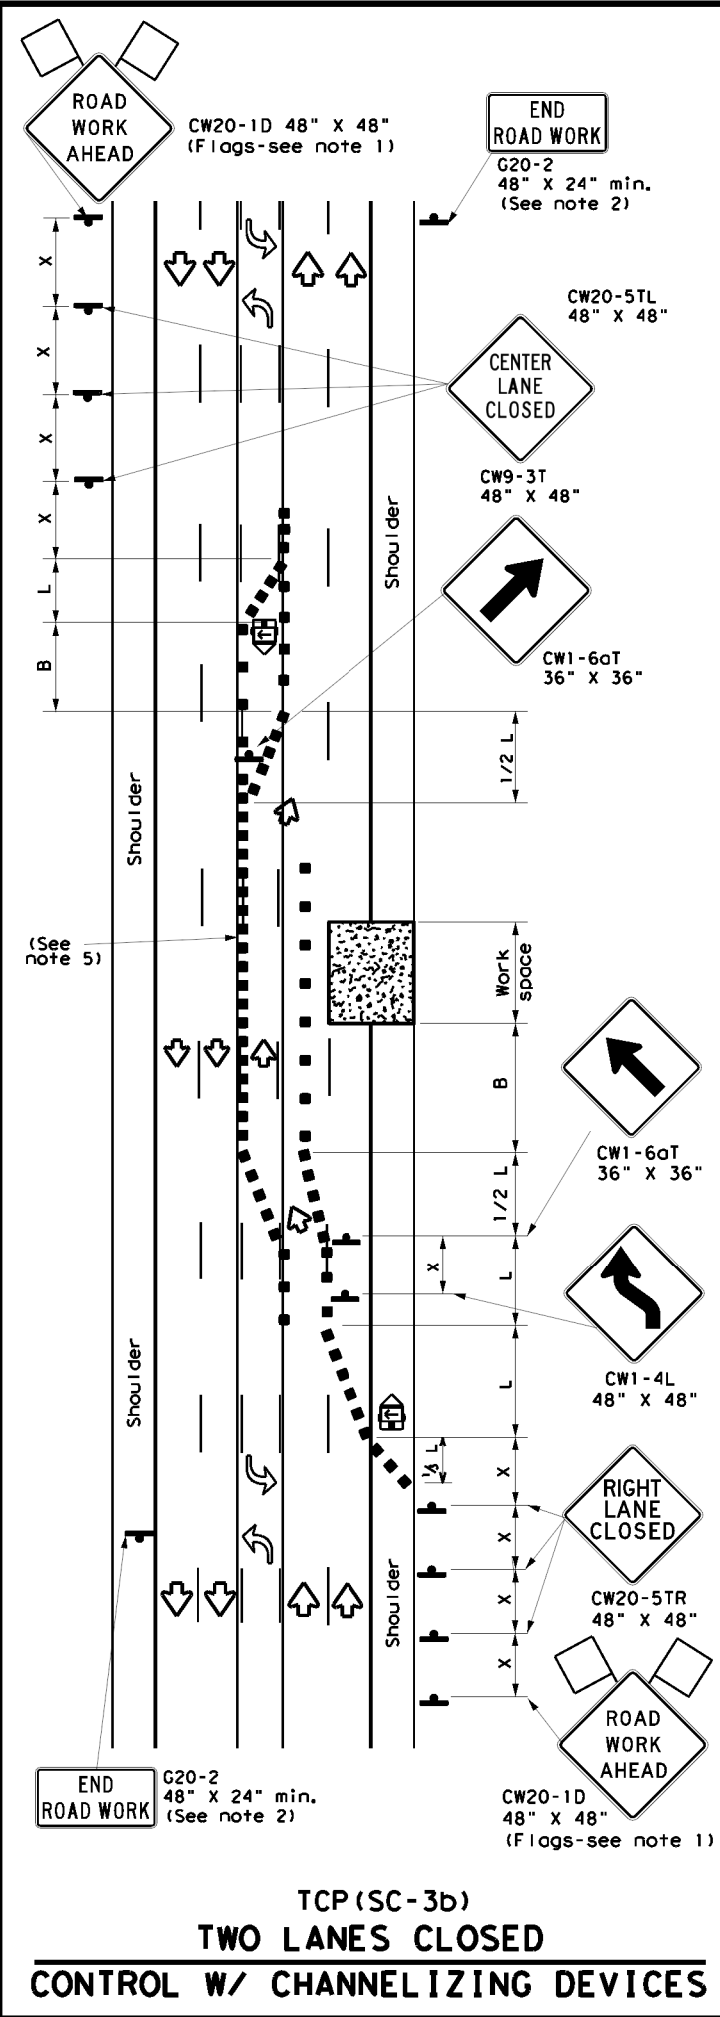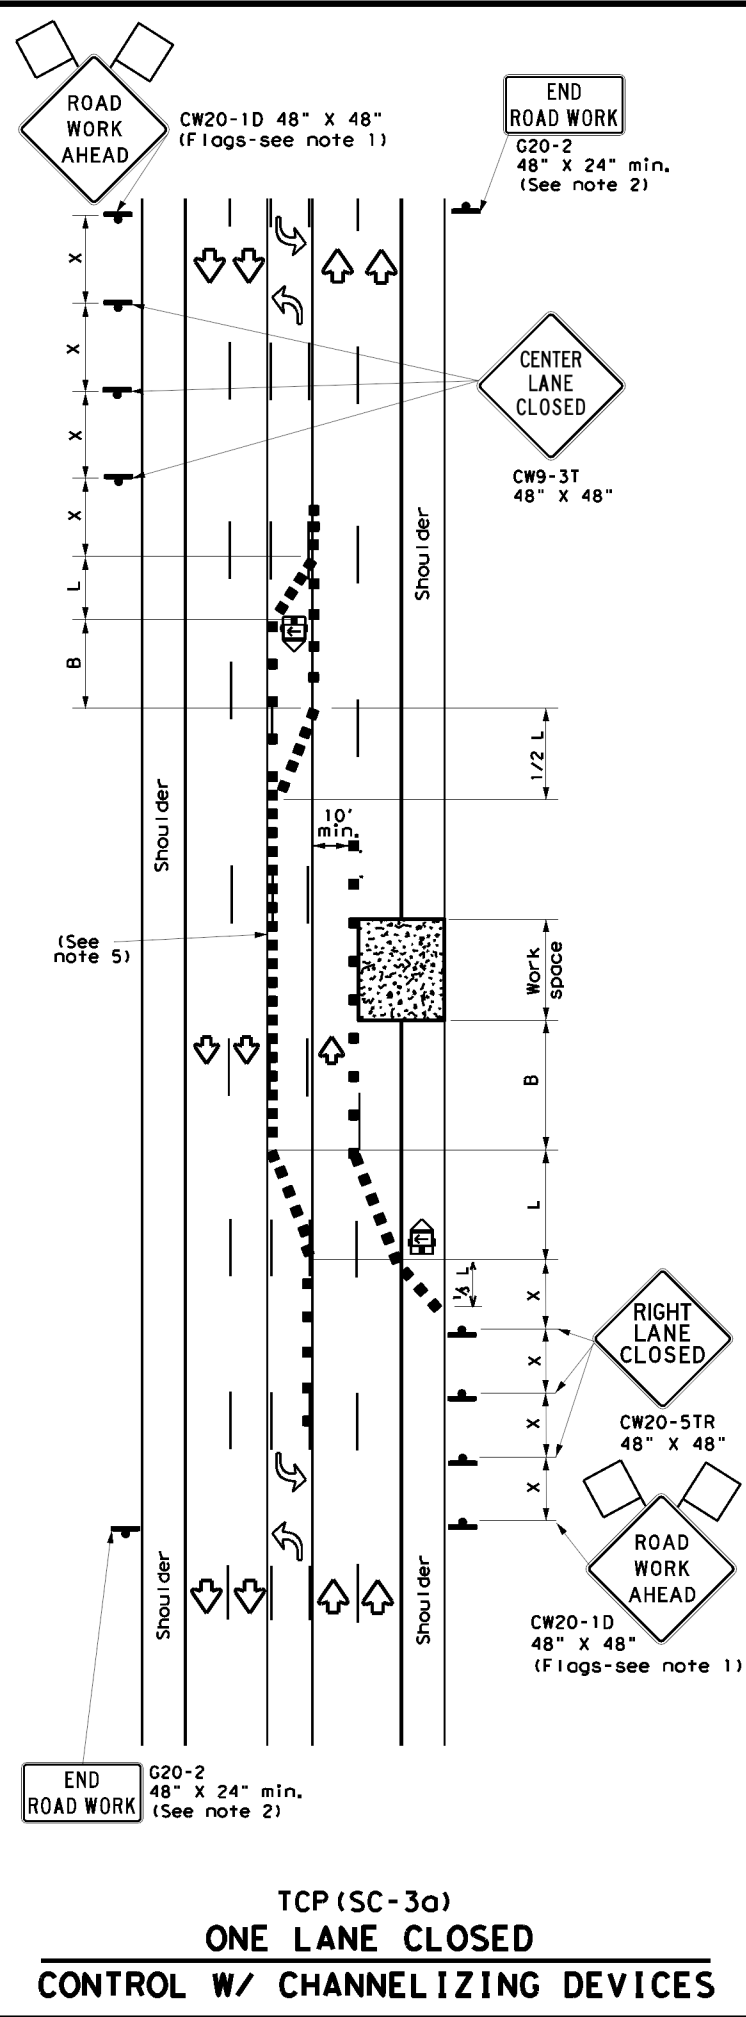

LEGEND

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * X	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "X"	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
 - If the seal coat operation crosses intersections, traffic in these areas must be controlled. Care must be taken to prevent vehicles from crossing the asphalt before the aggregate is placed. This may require positioning additional traffic control personal (flaggers) at the intersection.
 - Temporary rumble strips are not required on seal coat operations.
- TCP (SC-3a) and (SC-3b)**
- Channelizing devices which separate two-way traffic shall be spaced on tapers at:
 - 20 feet;
 - 15 feet when posted speeds are 35 mph or slower; or
 - at 1/2(S) for tangent sections.
 This tighter device spacing is intended for the areas of conflicting markings, not the entire work zone.

SHEET 3 OF 8


Texas Department of Transportation
 Traffic Safety Division Standard

**TRAFFIC CONTROL PLAN
SEAL COAT OPERATIONS
MULTILANE ROADS
(W/ CENTER LEFT TURN LANE)
TCP (SC-3) -22**

FILE: tcpsc-3-22.dgn	DATE: October 2022	CONTRACT NO: 0833 01	JOB: 009, etc. FM 217, etc
REVISIONS: 4-21, 10-22	DIST: WACO	COUNTY: Coryell, etc	SHEET NO.: 45

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:30:55 AM
 FILE: c:\txdot\pw_online\txdot\mgt\oba_babiker\0517044\tcpsc-4-22.dgn

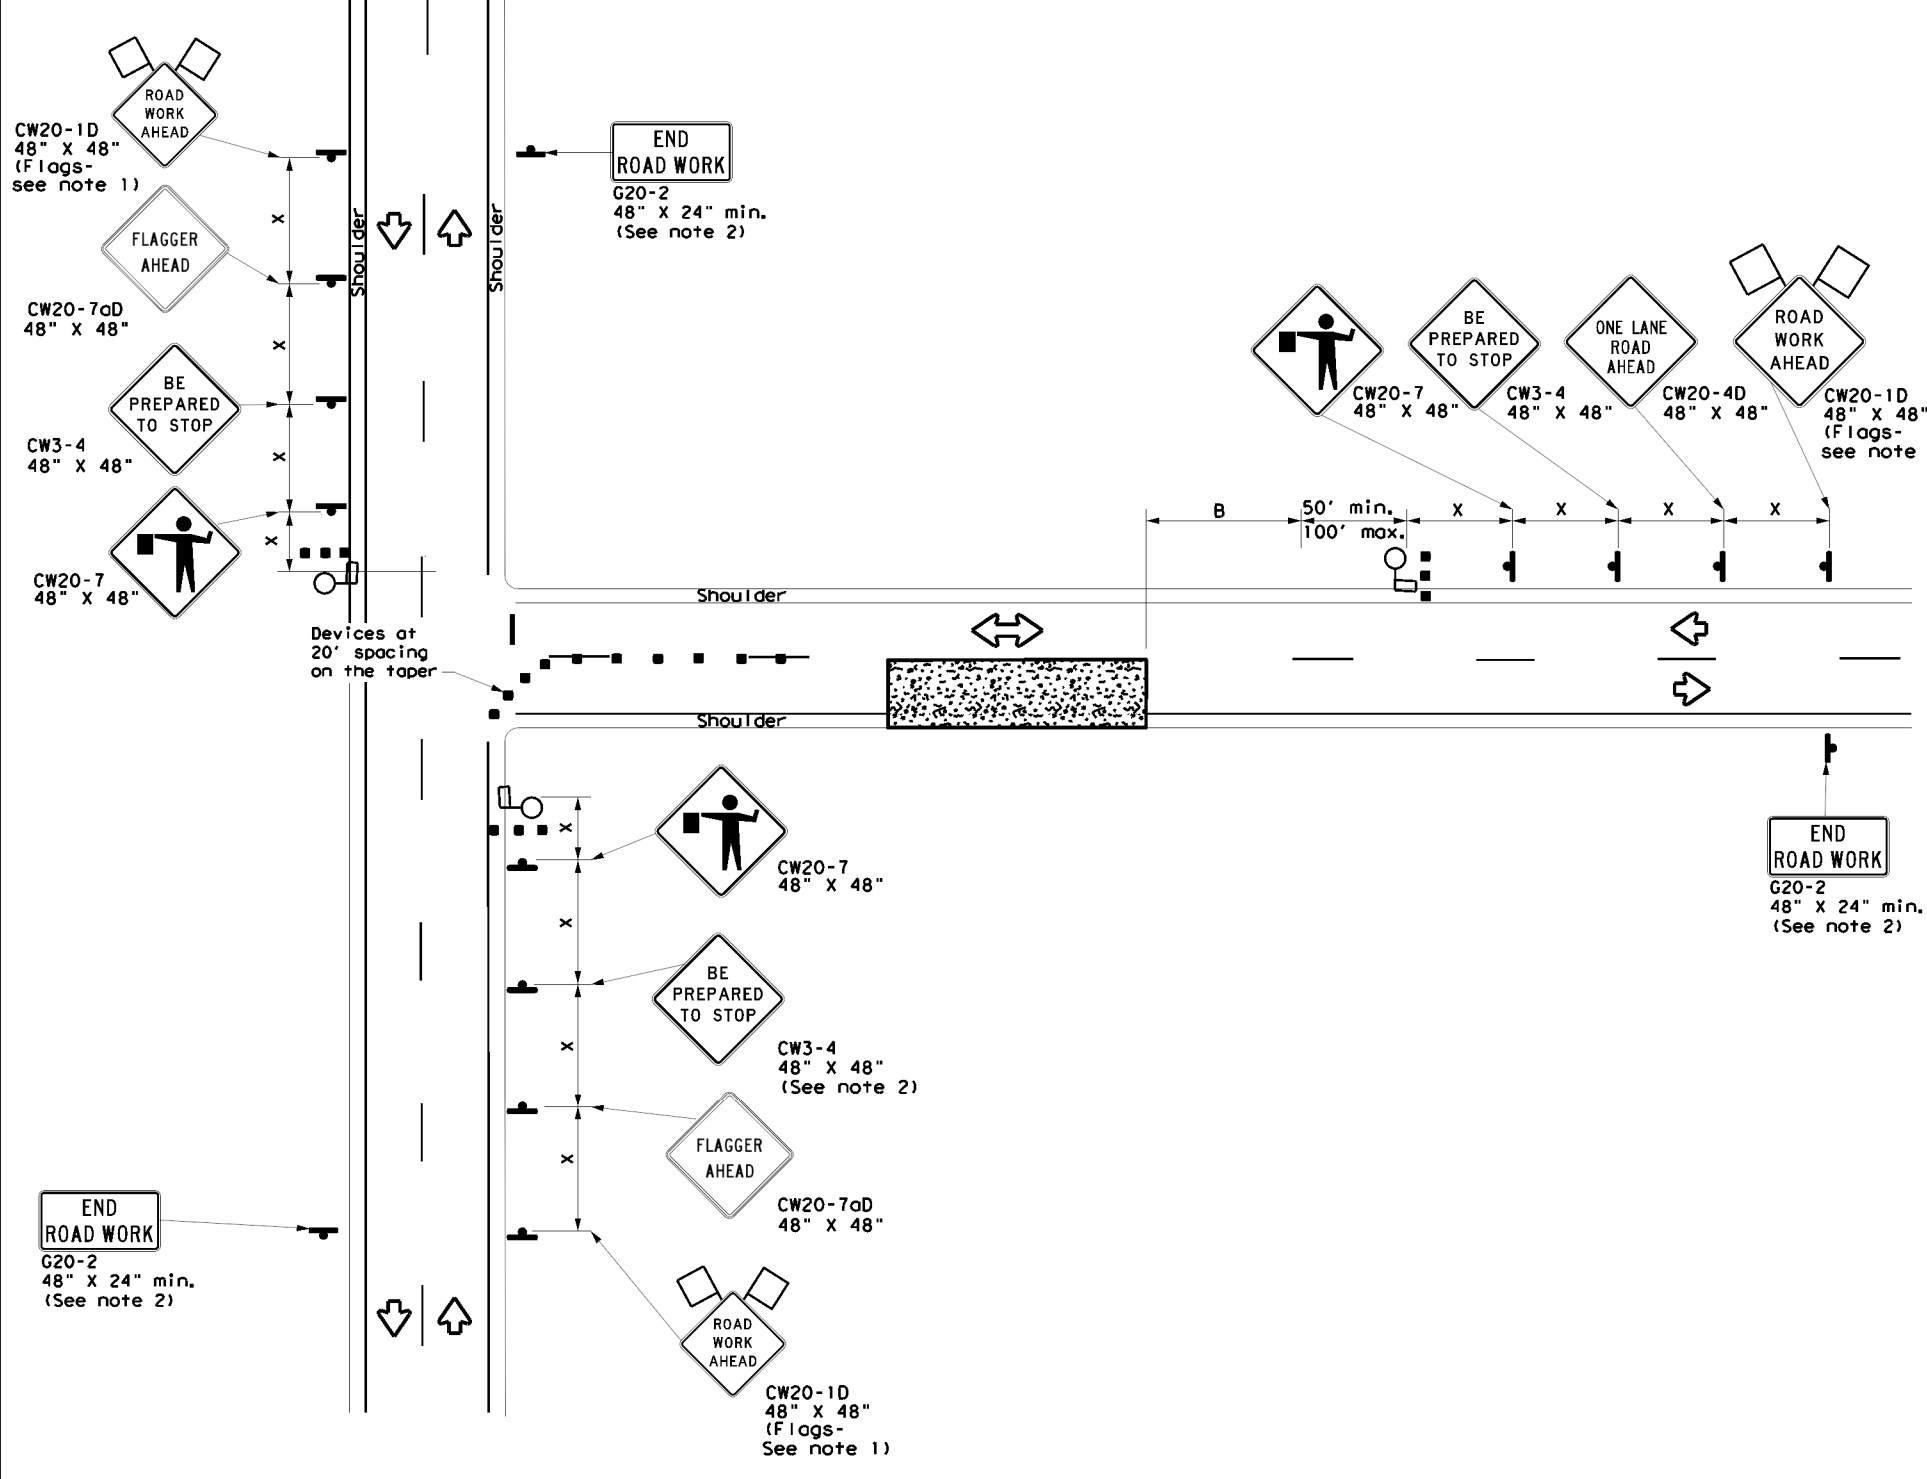

**ONE LANE TWO-WAY (T-INTERSECTION)
 CONTROL WITH PILOT VEHICLE**

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * %	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "X"	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT) S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except: if project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
- Flaggers should use two-way radios or other methods of communication at all times for traffic control coordination.
- Flaggers should use 24" STOP (CW20-8) / SLOW (CW20-8aT) paddles to control traffic. Flags should be limited to emergency situations.
- If the work space is located near a horizontal or vertical curve, the buffer distances should be increased in order to maintain adequate stopping sight distance to the flagger and a queue of stopped vehicles (see table above).
- Temporary rumble strips are not required on seal coat operations.
- The pilot car is used to guide vehicles through traffic control zone. The pilot car shall have an identification name displayed and PILOT CAR, FOLLOW ME (G20-4) sign or message board mounted in a conspicuous position on rear.

SHEET 4 OF 8




**TRAFFIC CONTROL PLAN
 SEAL COAT OPERATIONS
 NEAR INTERSECTION
 TCP (SC-4) -22**


FILE: tcpsc-4-22.dgn	DW: CK:	DW: CK:	CK:
© TxDOT October 2022	CONT SECT	JOB	HIGHWAY
REVISIONS	0833 01	009, etc.	FM 217, etc
4-21	DIST	COUNTY	SHEET NO.
10-22	WACO	Coryell, etc	46

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:31:01 AM
 FILE: c:\txdot\pw_online\txdot3\mgt\oba_babiker\d0577044\tcpsc-5-22.dgn

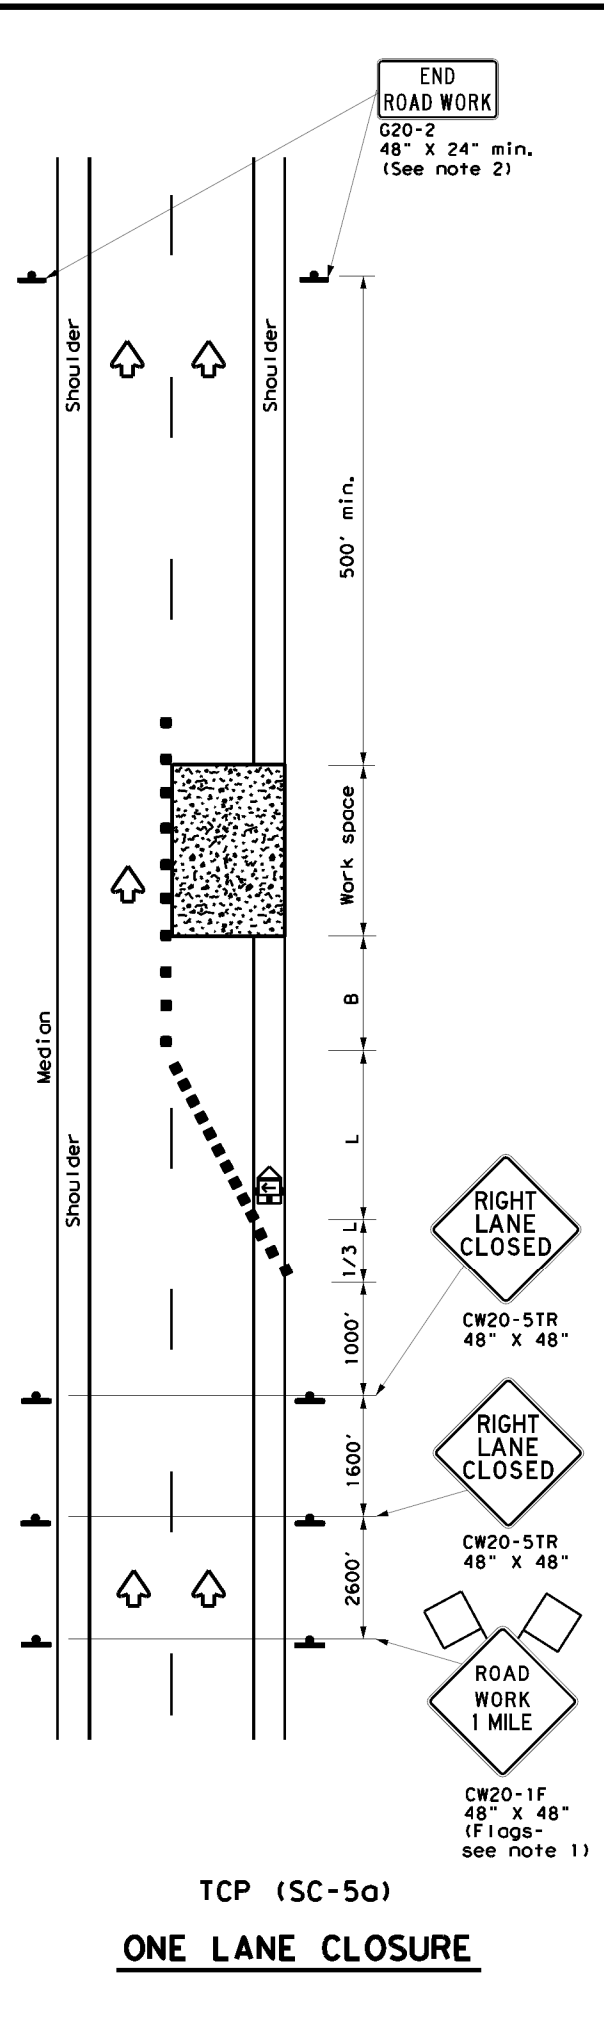

TCP (SC-5a)
ONE LANE CLOSURE

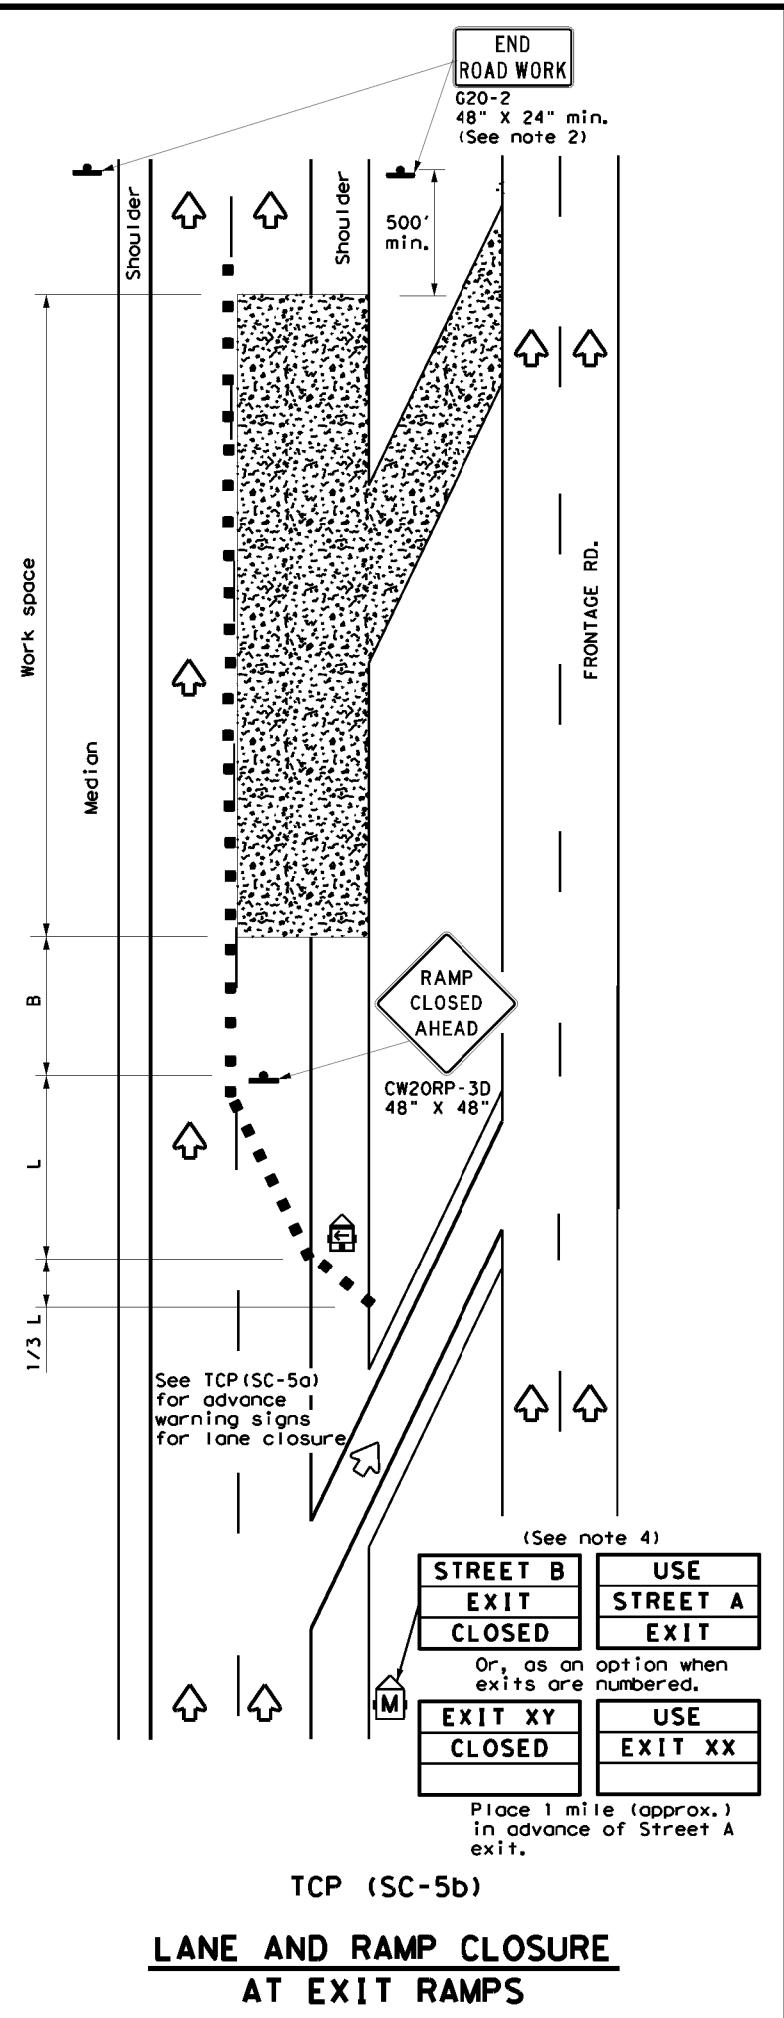

TCP (SC-5b)
LANE AND RAMP CLOSURE AT EXIT RAMP

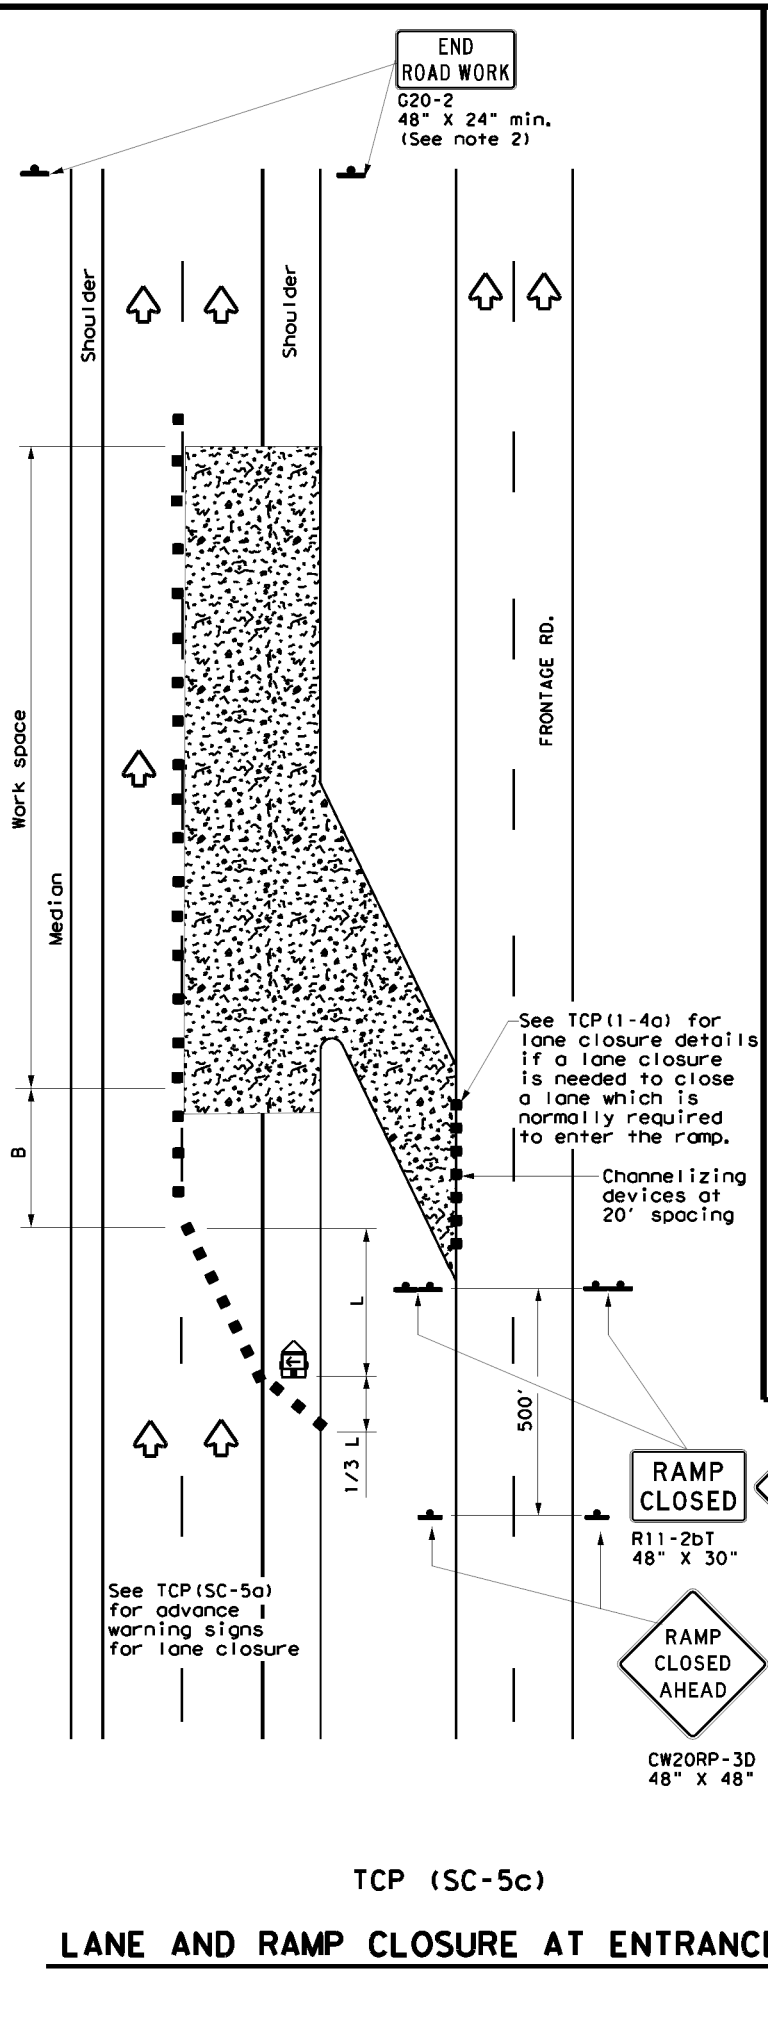

TCP (SC-5c)
LANE AND RAMP CLOSURE AT ENTRANCE RAMP

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing Distance "x"	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		✓		

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except:
 - If project signing is present, END ROAD WORK (G20-2) sign is optional with approval by the Engineer.
 - USE NEXT RAMP (CW25-1T) sign is optional with approval by the Engineer.
 - Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
 - The PCMS may be omitted if: it is replaced with a RAMP CLOSED AHEAD (CW20RP-3D) sign or when a permanent Dynamic Message Sign (DMS) is available in the appropriate location to display a similar message as called for on the PCMS.
 - Temporary rumble strips are not required on seal coat operations.

SHEET 5 OF 8

Texas Department of Transportation
 Traffic Safety Division Standard


**TRAFFIC CONTROL PLAN
 SEAL COAT OPERATIONS
 DIVIDED HIGHWAYS**

TCP (SC-5) -22


FILE: tcpsc-5-22.dgn	DW: []	CK: []	DW: []	CK: []
© TxDOT	October 2022	CONTRACT NO. 0833 01	SECTION 009, etc.	JOB NO. FM 217, etc
4-21	REVISIONS	DISTRICT	COUNTY	SHEET NO.
10-22		WACO	Coryell, etc	47

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:31:07 AM
 FILE: c:\t\dot\p_w_online\t\dot\tcpsc-6-22.dgn
 c:\t\dot\p_w_online\t\dot\tcpsc-6-22.dgn

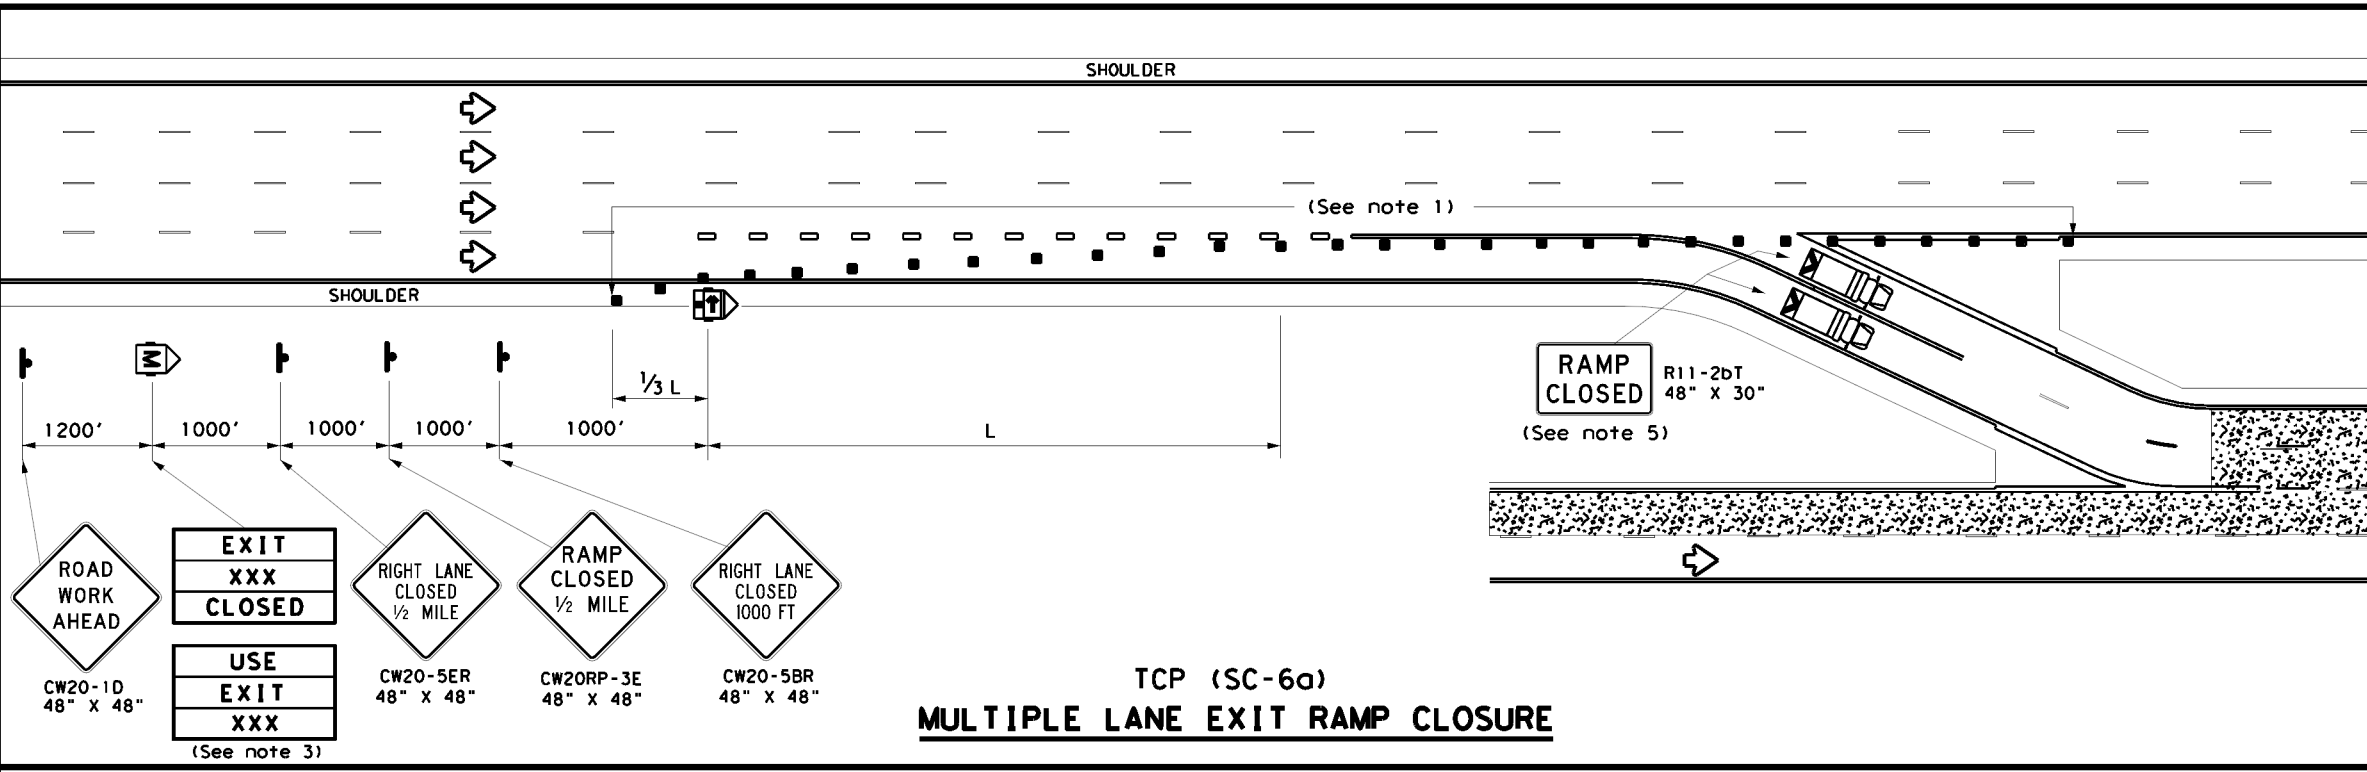

TCP (SC-6a)
MULTIPLE LANE EXIT RAMP CLOSURE

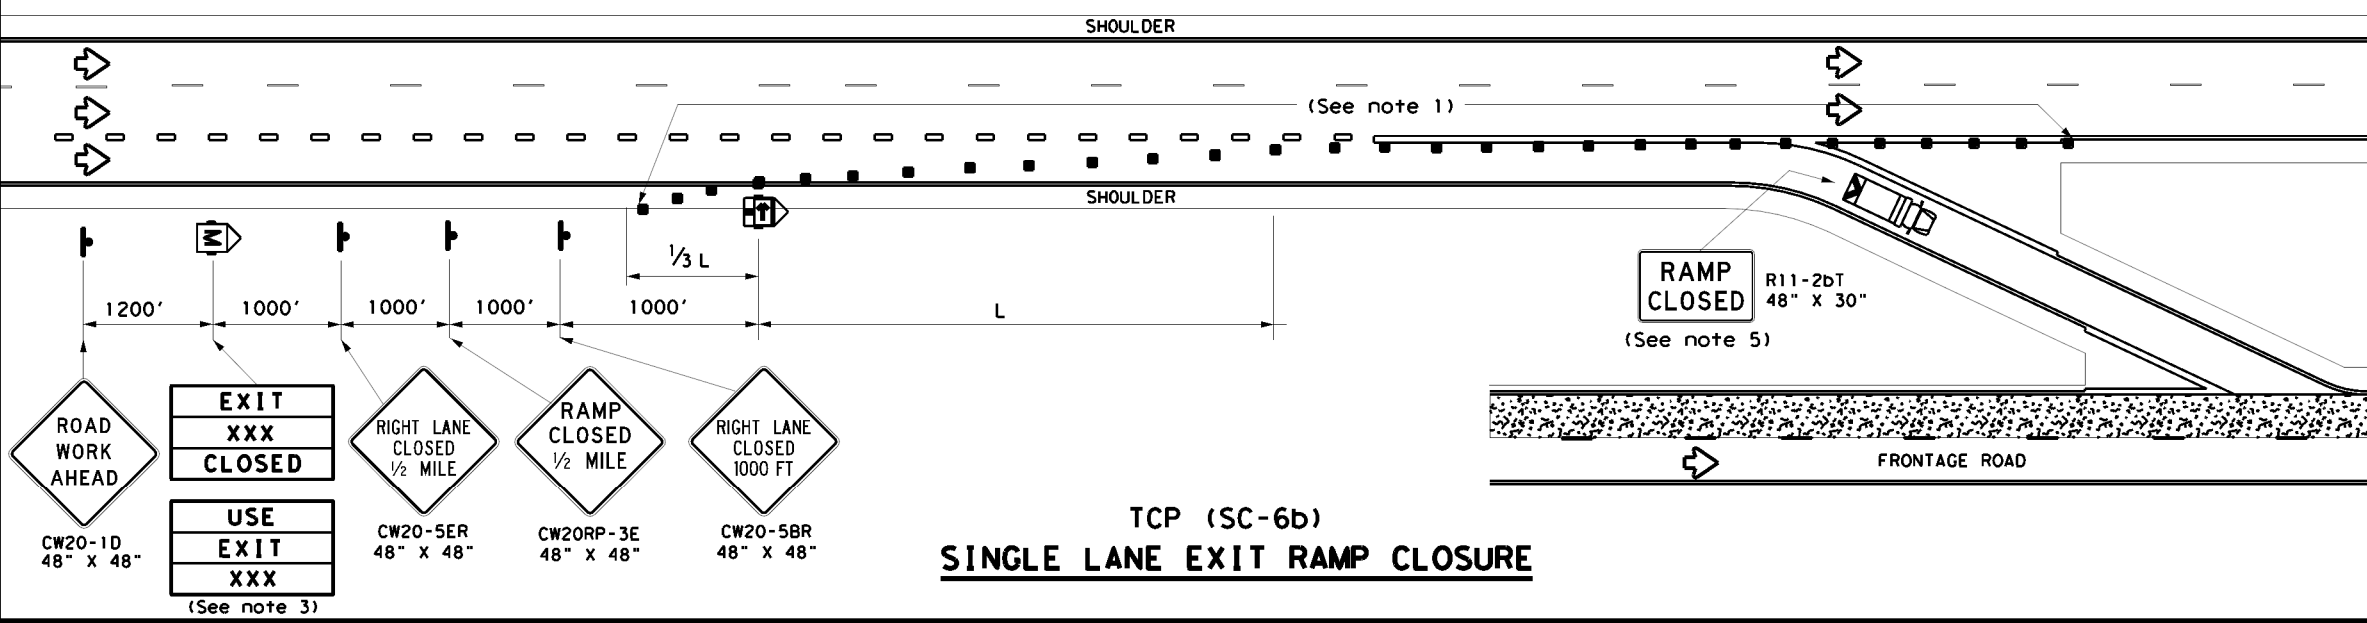

TCP (SC-6b)
SINGLE LANE EXIT RAMP CLOSURE

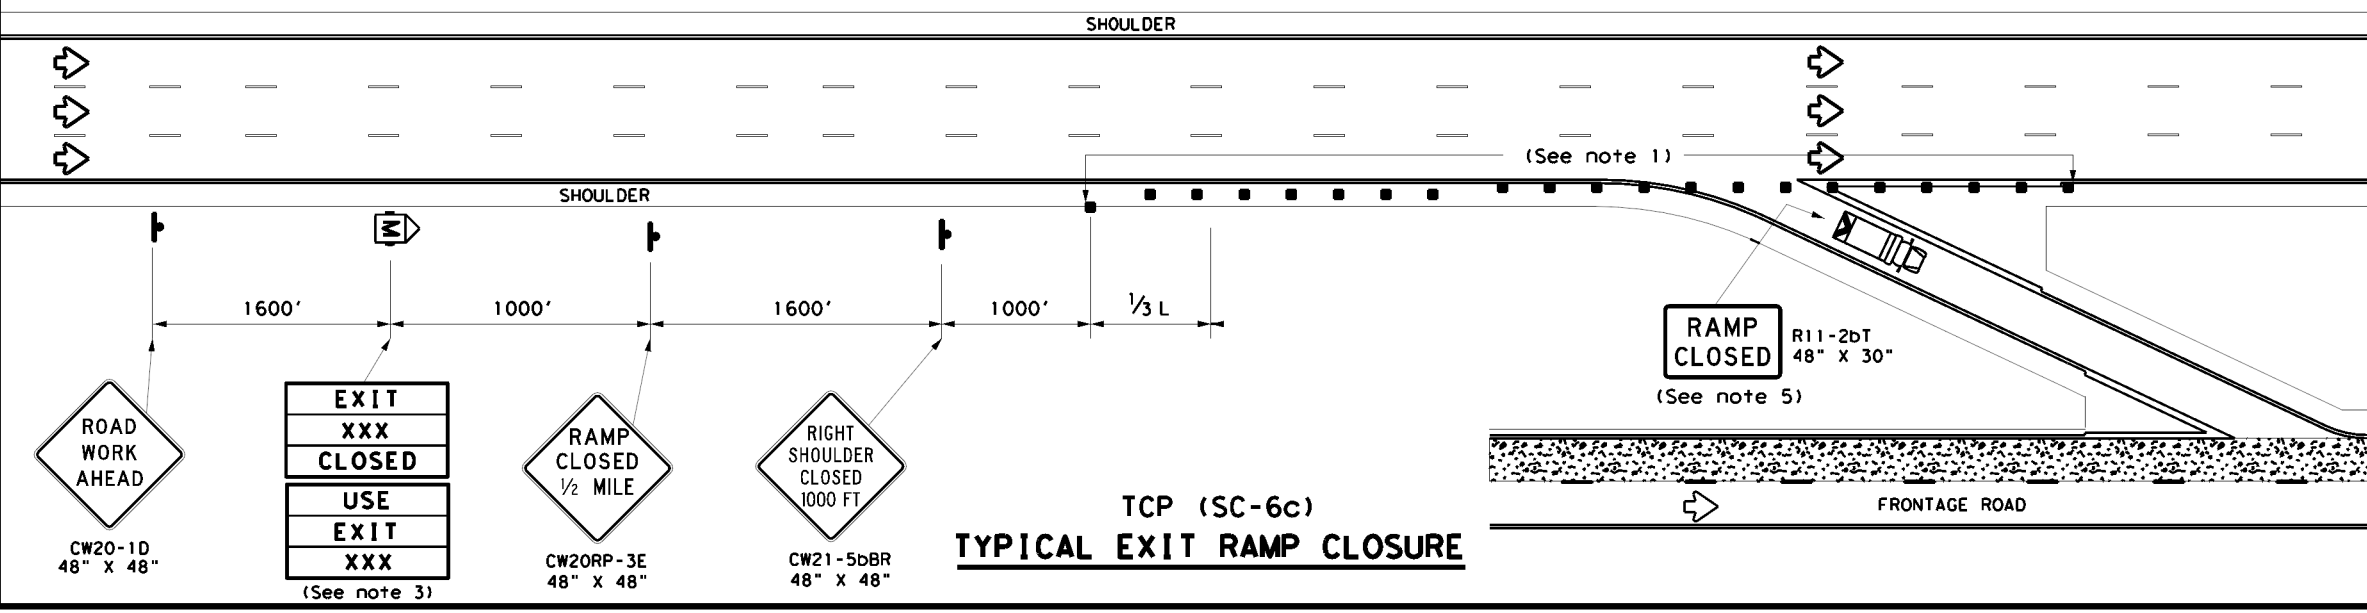

TCP (SC-6c)
TYPICAL EXIT RAMP CLOSURE

LEGEND			
	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L"			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'
85		850'	935'	1020'	85'	170'	695'

** Taper lengths have been rounded off.
 L = Length of Taper (FT) W = Width of Offset (FT)
 S = Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Place channelizing devices at 20' spacings. Tighter spacing allowed as necessary to address field conditions or observed driver behavior.
 - See the Standard Highway Sign Design for Texas (SHSD) for sign details.
 - The PCMS may be omitted if replaced with a RAMP CLOSED AHEAD (CW20RP-3D) sign or when a permanent Dynamic Message Sign (DMS) is available in an appropriate location to display a similar message as called for on the PCMS.
 - When it is determined that a through lane should be closed in addition to the exit ramp, refer to TCP(6-4) for traffic control details.
 - A Truck Mounted Attenuator (TMA), where shown, is REQUIRED and shall have a RAMP CLOSED (R11-2bT) sign mounted on the rear of the truck.

**TRAFFIC CONTROL PLAN
 SEAL COAT OPERATIONS
 DIVIDED HIGHWAYS**


TCP (SC-6) - 22

FILE: tcpsc-6-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT October 2022	CONT	SECT	JOB	HIGHWAY
10-22	REVISIONS	0833	01 009, etc.	FM 217, etc
	DIST	COUNTY		SHEET NO.
	WACO	Coryell, etc		48


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023
 FILE: c:\txdot\pw_online\txdot3\mgt\oba_babiker\0517044\tcpsc-7-22.dgn


WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS (TABS)

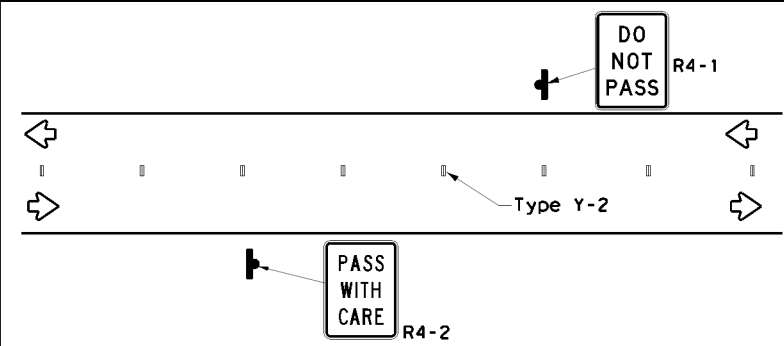


CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO LANE TWO-WAY HIGHWAYS

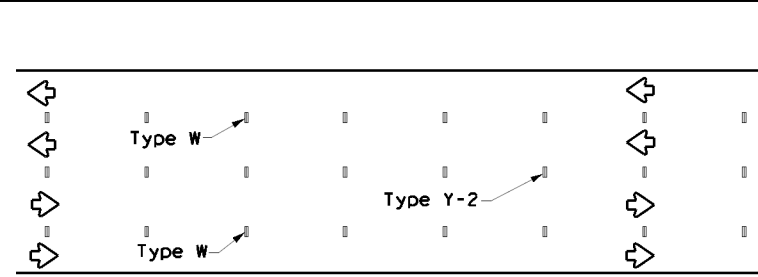

LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

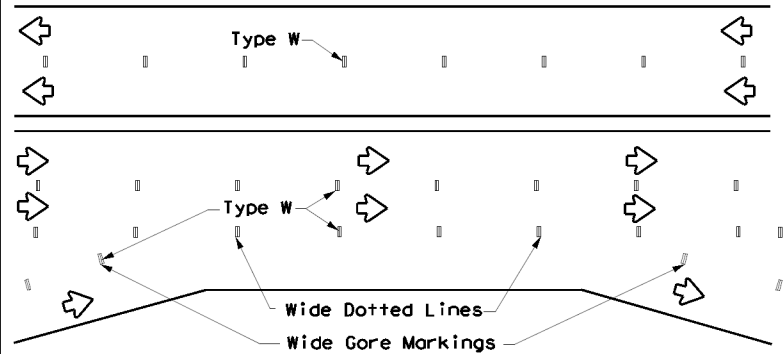


LANE LINES FOR DIVIDED HIGHWAY

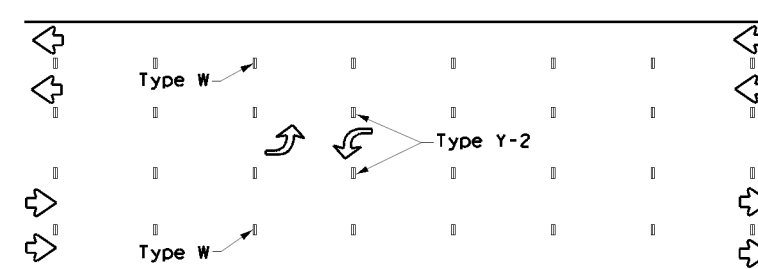

TWO-WAY LEFT TURN LANE

TABS ON CENTERLINES OF TWO-LANE TWO-WAY ROADS

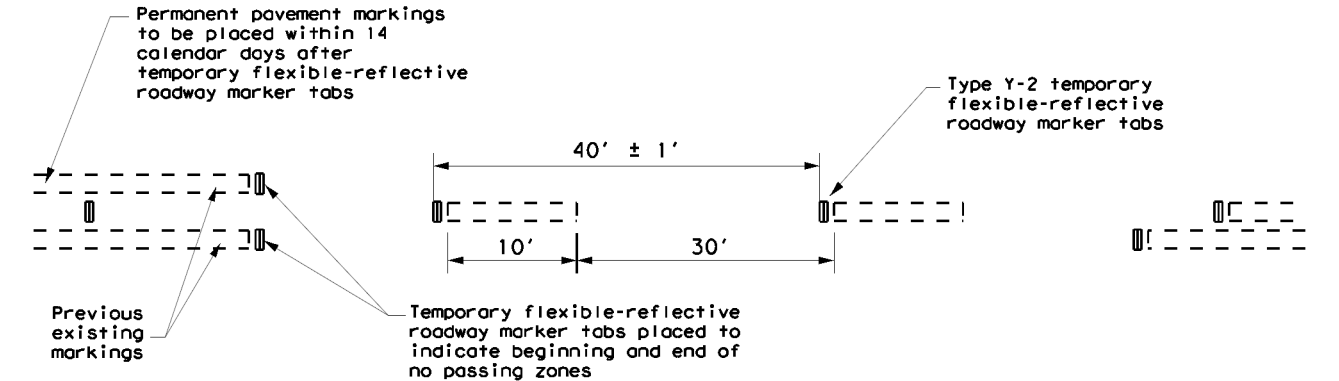

TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS

1. Temporary markings for surfacing projects shall be Temporary Flexible-Reflective Roadway Marker Tabs with protective cover unless otherwise approved by the Engineer. Tabs are to be installed to provide true alignment for striping crews or as directed by the Engineer. Tabs will be placed at the spacing indicated. Tabs should be applied to the pavement no more than two days before the surfacing is applied. After the surfacing is rolled and swept, the protective cover over the reflective strip shall be removed.
2. Temporary Flexible-Reflective Roadway Marker Tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with a yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
3. Temporary Flexible-Reflective Roadway Marker Tabs will require normal maintenance replacement when used on roadways with an Average Daily Traffic (ADT) per lane of up to 7500 vehicles with no more than 10% truck mix. When roadway volumes exceed these values, additional maintenance replacement of these devices should be planned for.
4. When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
5. No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 4.
6. Tabs shall meet requirements of Departmental Material Specification DMS-8242.
7. Tabs shall NOT be used to simulate edge lines.

NOTES:

1. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
2. For exit gores where a lane is being dropped, place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are NOT acceptable.
3. Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

1. DMSs referenced above may be found along with embedded links to their respective MPLs at the following website: <http://www.txdot.gov>

SHEET 7 OF 8

WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS (TABS)

SOLID LINES	DOUBLE NO-PASSING LINE	
	SINGLE NO-PASSING LINE OR CHANNELIZATION LINE	
	8" WIDE SOLID LINE	
BROKEN LINES (FOR CENTER LINE OR LANE LINE)		
WIDE DOTTED LINES (FOR LANE DROP LINES)		
WIDE GORE MARKINGS		

TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS

TOP VIEW

FRONT VIEW

SIDE VIEW

Height of sheeting is usually more than 1/4" and less than 1".


TEMPORARY PAVEMENT MARKINGS FOR SEAL COAT OPERATIONS

TCP (SC-7) -22


FILE: tcpsc-7-22.dgn	DWG: TxDOT	CHK: TxDOT	APP: TxDOT	CR: TxDOT
© TxDOT October 2022	CONT: 0833 01	SECT: 009, etc.	JOB: FM 217, etc	HIGHWAY:
REVISIONS: 4-21 10-22	DIST: WACO	COUNTY: Coryell, etc	SHEET NO.:	49

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:31:18 AM
 FILE: c:\txdot\pw_online\txdot3\mgotaba_babiker\d0577044\pm1-22.dgn

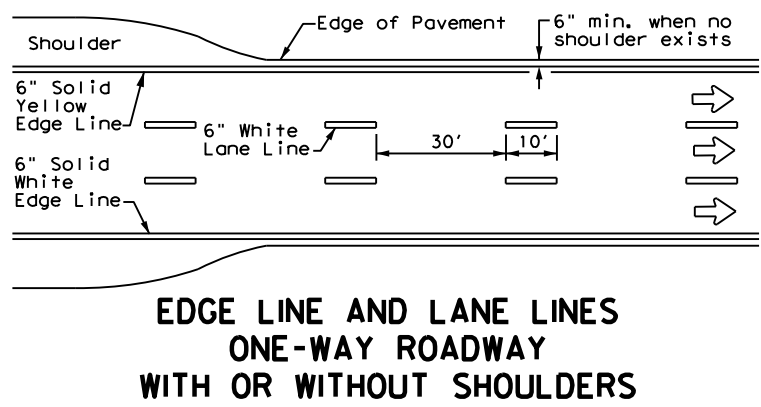



**EDGE LINE AND LANE LINES
 ONE-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

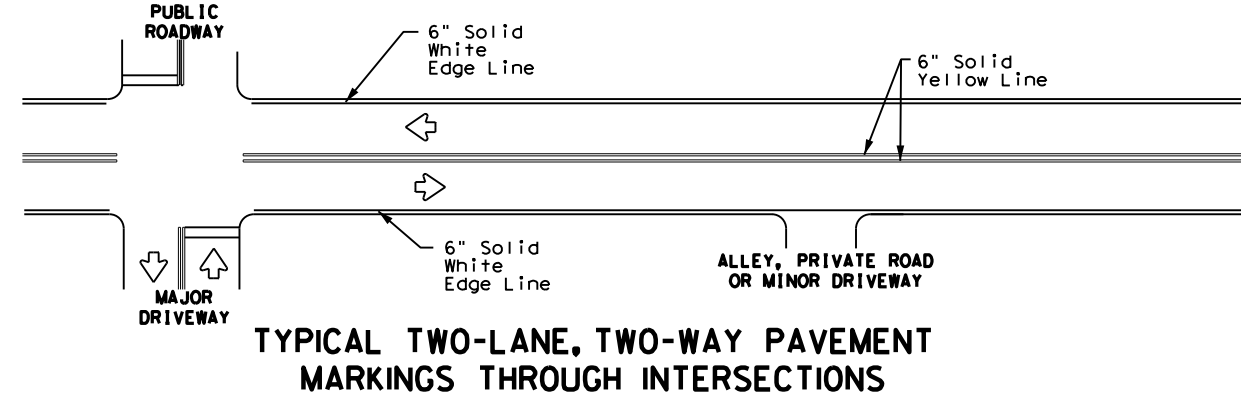


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
 MARKINGS THROUGH INTERSECTIONS**

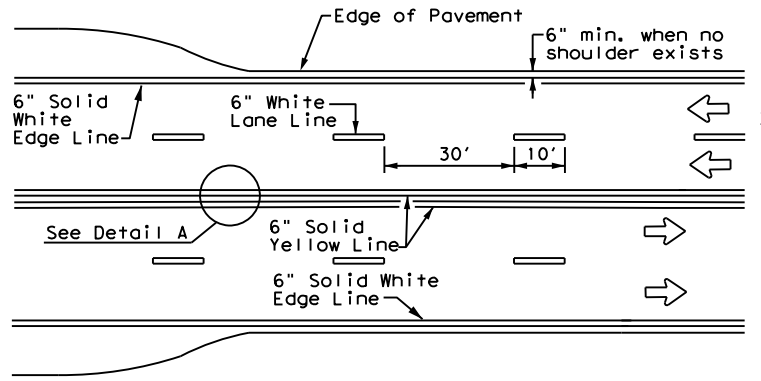



**CENTERLINE AND LANE LINES
 FOUR LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

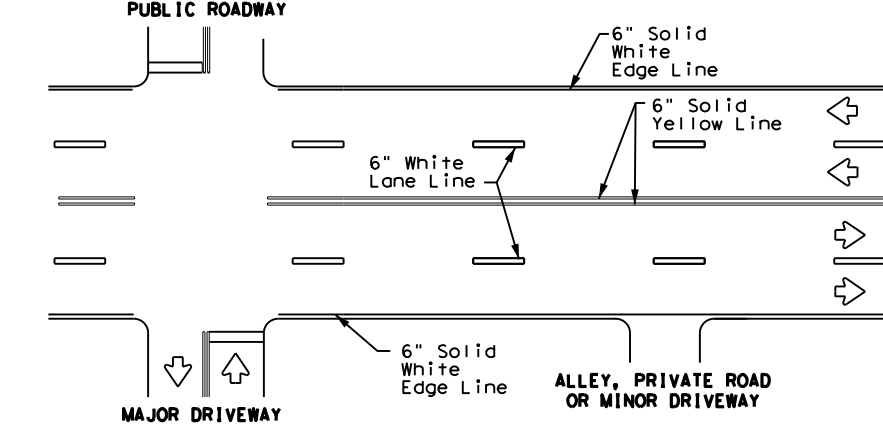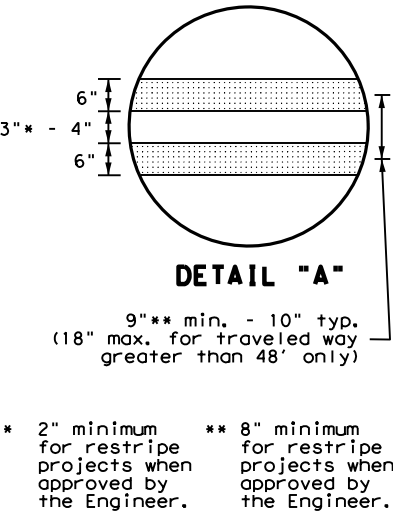


**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
 MARKINGS THROUGH INTERSECTIONS**

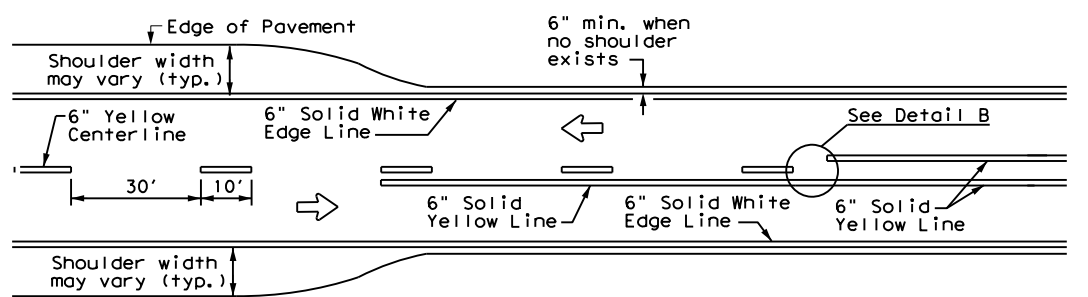

**TWO LANE TWO-WAY ROADWAY
 WITH OR WITHOUT SHOULDERS**

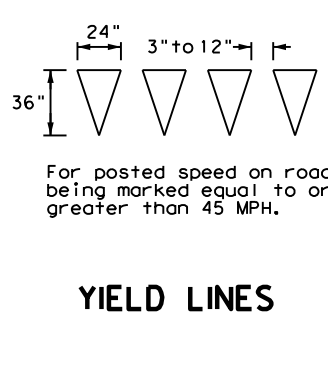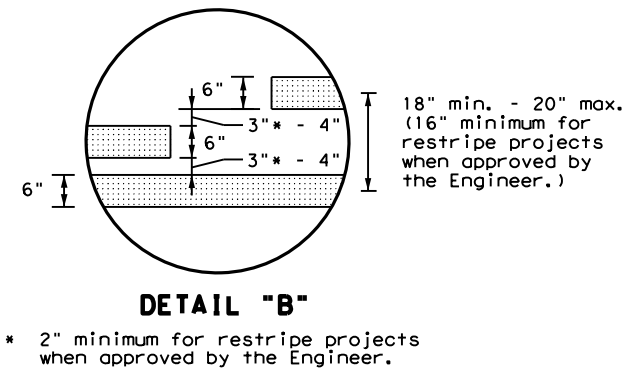

YIELD LINES

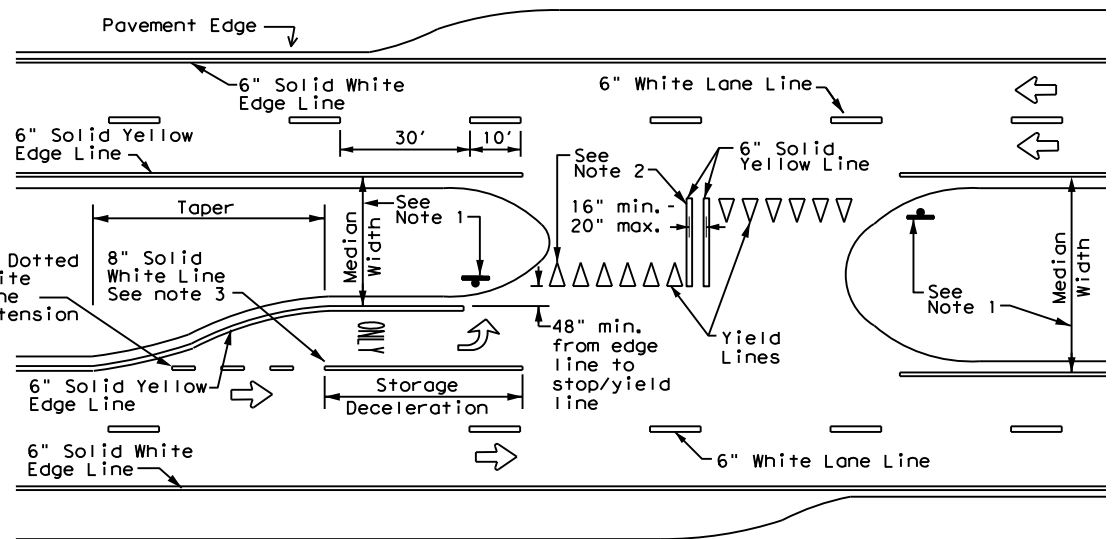

FOUR LANE DIVIDED ROADWAY CROSSOVERS

NOTES


- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

GENERAL NOTES

- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
- The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

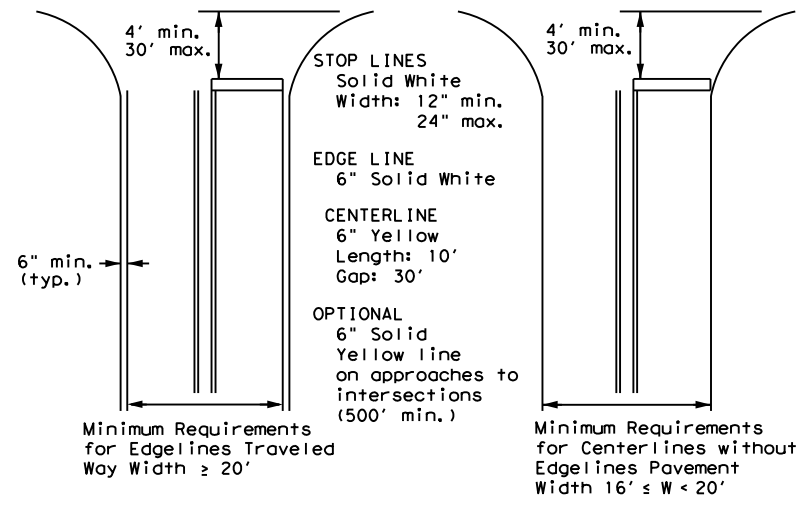

NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

**GUIDE FOR PLACEMENT OF STOP LINES,
 EDGE LINE & CENTERLINE**
 Based on Traveled Way and Pavement Widths
 for Undivided Roadways

Texas Department of Transportation
 Traffic Safety Division Standard

**TYPICAL STANDARD
 PAVEMENT MARKINGS**

PM(1) - 22


FILE: pm1-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
11-78 8-00 6-20	DIST	COUNTY	SHEET NO.	
8-95 3-03 12-22	WACO	Coryell, etc	50	
5-00 2-12				

22A


REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.



DATE: 7/6/2023 8:31:21 AM
FILE: c:\txdot\pw_online\txdot3\mgt\aba_babiker\0577044\pm2-22.dgn

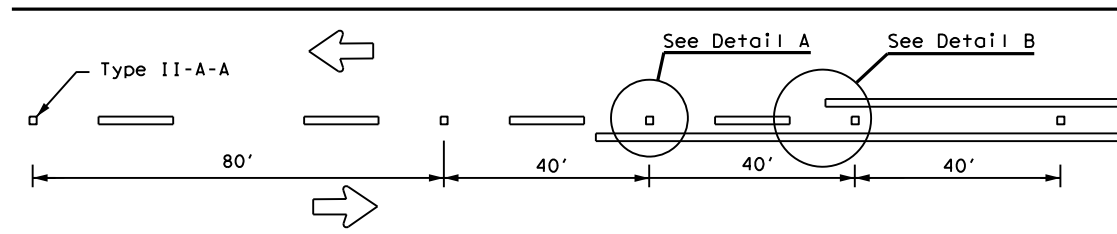


CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS

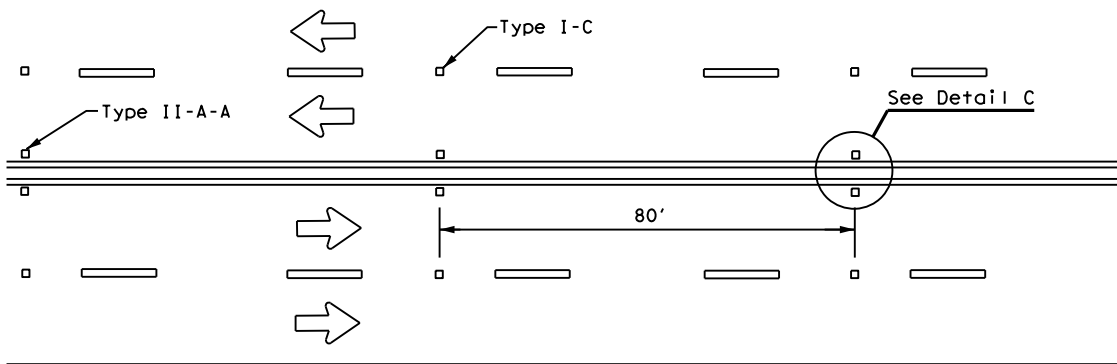

**CENTERLINE & LANE LINES
FOR FOUR LANE TWO-WAY ROADWAYS**

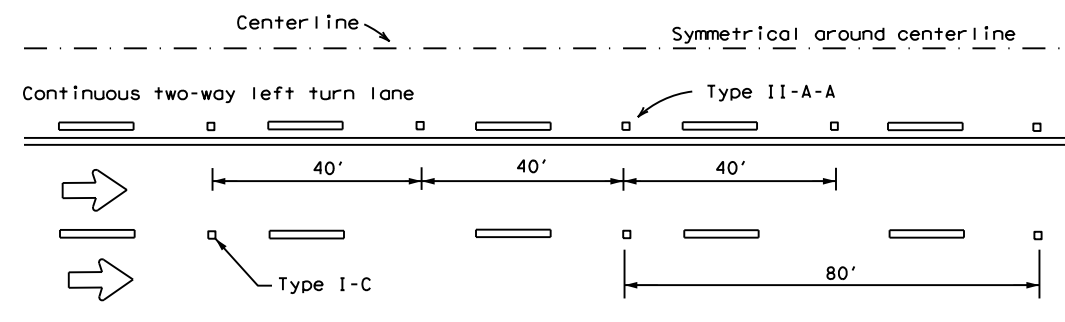
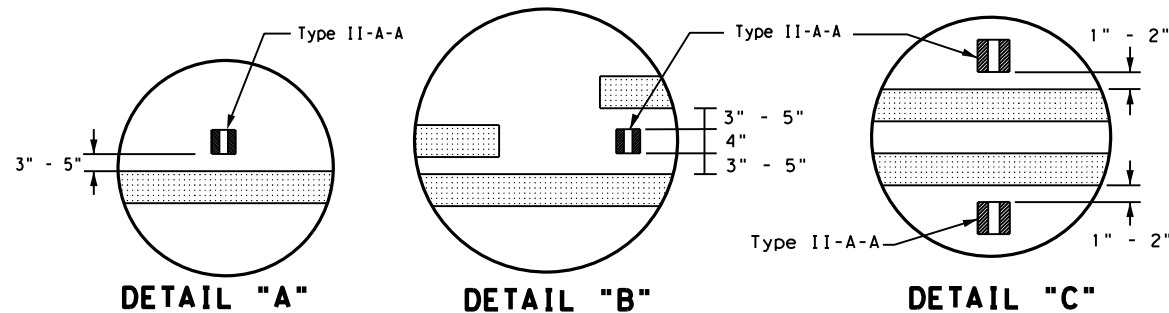


CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE

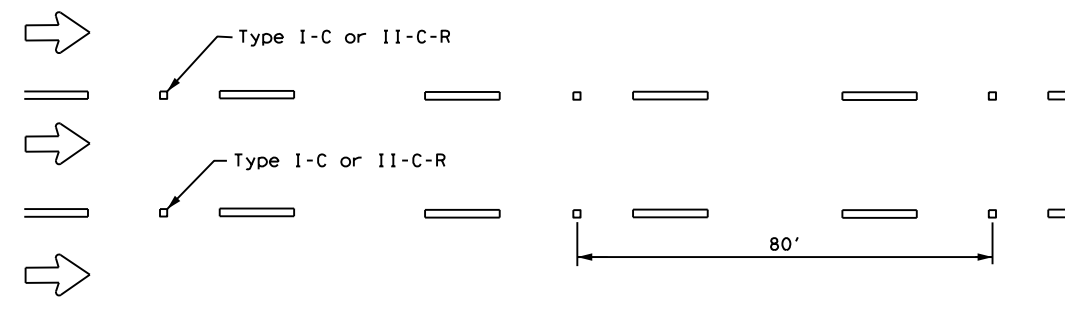


LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)

Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.
See Note 3.

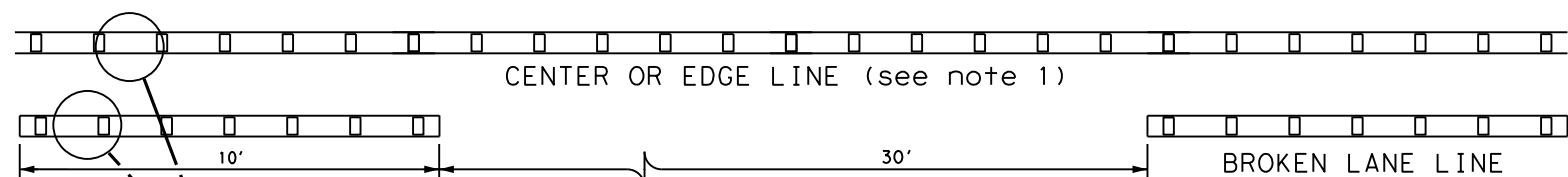

**REFLECTORIZED PROFILE
PATTERN DETAIL**

USING REFLECTIVE PROFILE PAVEMENT MARKINGS



NOTES


1. Edge lines should typically be 6" wide and the materials shall be specified in the plans.
2. Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

GENERAL NOTES


1. All raised pavement markers placed along broken lines shall be placed in line with and midway between the stripes.
2. On concrete pavements the raised pavement markers should be placed to one side of the longitudinal joints.
3. Use raised pavement marker Type I-C with undivided roadways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

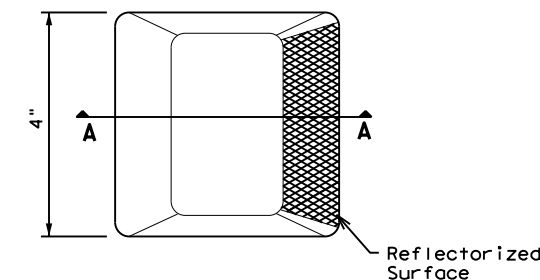

Type I (Top View)

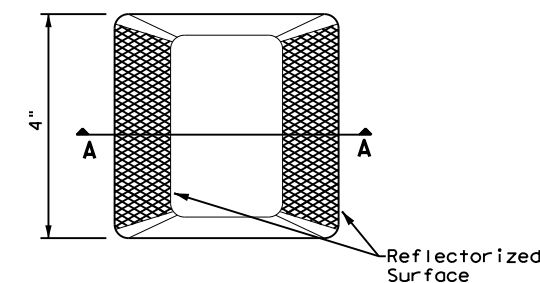

Type II (Top View)



SECTION A

RAISED PAVEMENT MARKERS




**POSITION GUIDANCE USING
RAISED MARKERS
REFLECTORIZED PROFILE
MARKINGS
PM(2) - 22**

FILE: pm2-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
4-77 8-00 6-20	DIST	COUNTY	SHEET NO.	
4-92 2-10 12-22	WACO	Coryell, etc	51	
5-00 2-12				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:31:25 AM
 FILE: c:\txdot\pw_online\txdot3\magtaba_babiker\0577044\pm3-22.dgn

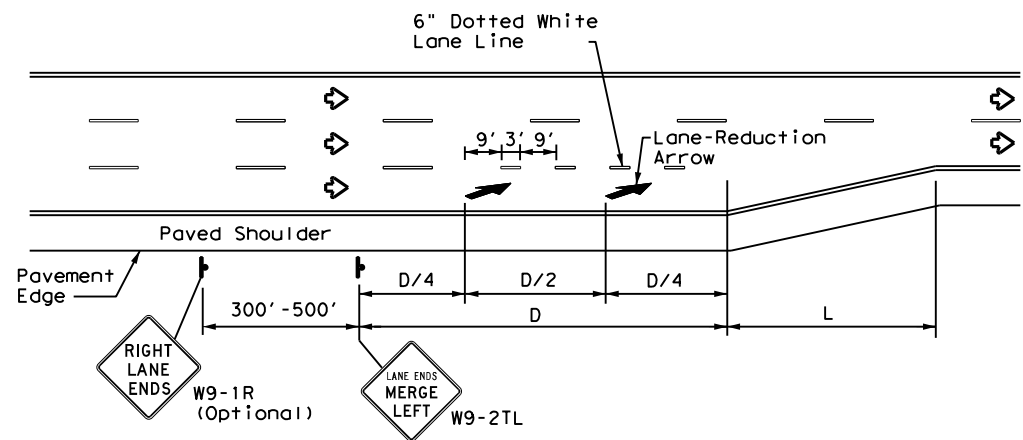

LANE REDUCTION

NOTES

1. Lane reduction pavement markings are used where the number of through lanes is reduced because of narrowing of the roadway or because of a section of on-street parking in what would otherwise be a through lane. For Texas Super 2 Passing Lanes, see TS2(PL) standard sheets.
2. On divided highways, an additional RIGHT LANE ENDS (W9-1R) sign may be installed in the median aligned with the W9-1R sign on the right side of the highway.
3. Lane reduction arrows are required for speeds of 45 mph or greater. An optional third lane reduction arrow may be added based on engineering judgement. If used, the optional third lane reduction arrow should be centered between the first and last lane reduction arrows.
4. For lane reductions on Freeways and Expressways, signing shall conform to the TxDOT Freeway Signing Handbook.


ADVANCED WARNING SIGN DISTANCE (D)		
Posted Speed	D (ft)	L (ft)
30 MPH	460	$L = \frac{WS^2}{60}$
35 MPH	565	
40 MPH	670	
45 MPH	775	L=WS
50 MPH	885	
55 MPH	990	
60 MPH	1,100	
65 MPH	1,200	
70 MPH	1,250	
75 MPH	1,350	

GENERAL NOTES


1. Lane use word and arrow markings shall be used where through lanes approaching an intersection become mandatory turn lanes. Lane use word and arrow markings should be used in auxiliary lanes of substantial length. Lane use arrow markings or word and arrow markings may be used in other lanes and turn bays for emphasis. Details for words and arrows are as shown in the Standard Highway Sign Designs for Texas.
2. When lane-use words and arrow markings are used, two sets of arrows should be used if the length of the bay is greater than 180 feet. When a single lane use arrow or word and arrow marking is used for a short turn lane, it should be located at or near the upstream end of the full-width turn lane.
3. Use raised pavement marker Type I-C with undivided highways, flush medians and two way left turn lanes. Use raised pavement marker Type II-C-R with divided highways and raised medians.
4. Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer. See Chapter 3 of the Roadway Design Manual for additional information on turning lanes or storage lengths.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

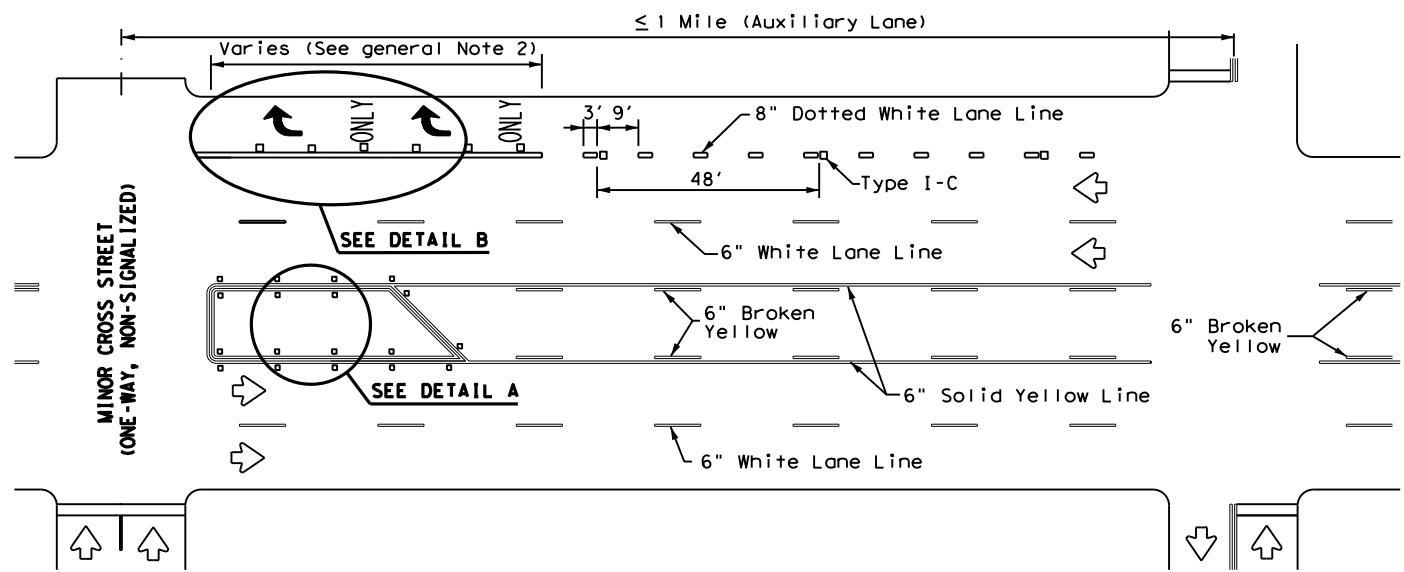


TYPICAL TWLTL AT ONE-WAY STREET AND RIGHT TURN AUXILIARY LANE

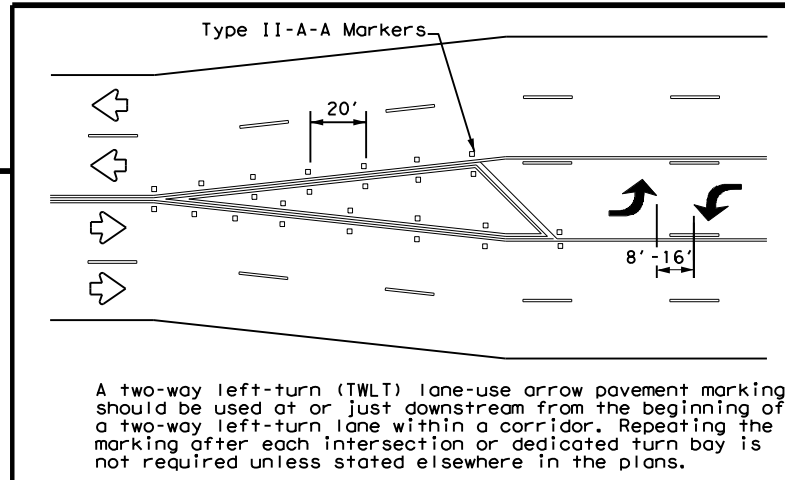


TYPICAL TRANSITION FOR TWLTL AND DIVIDED HIGHWAY

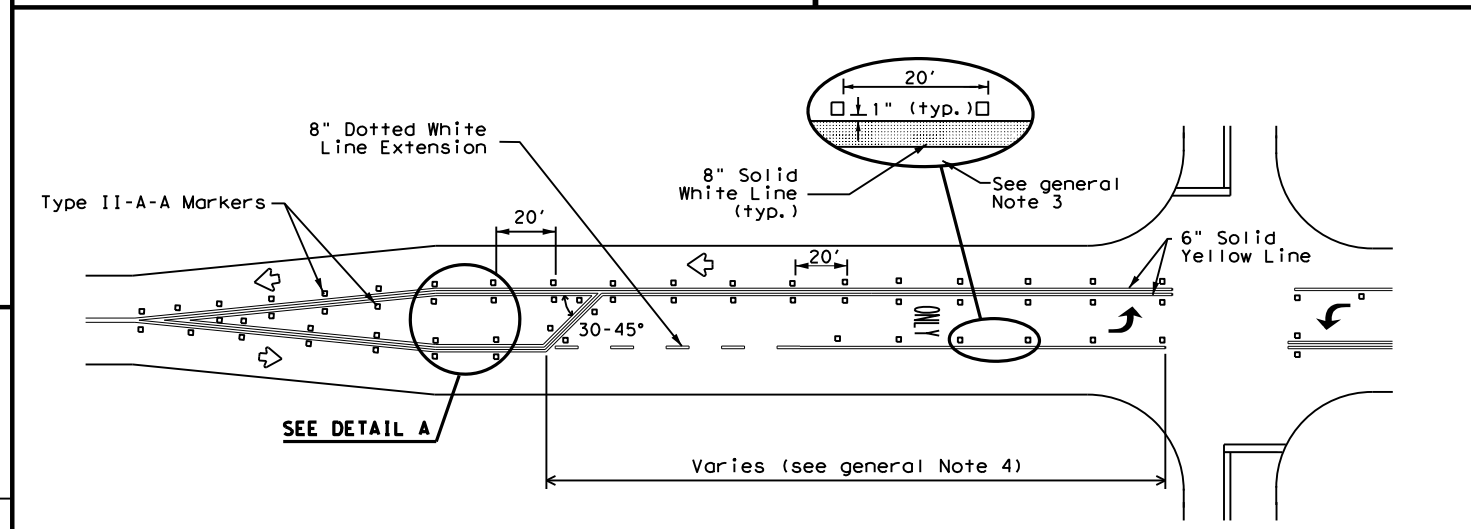

TYPICAL TWO-LANE ROADWAY INTERSECTION WITH LEFT TURN BAYS

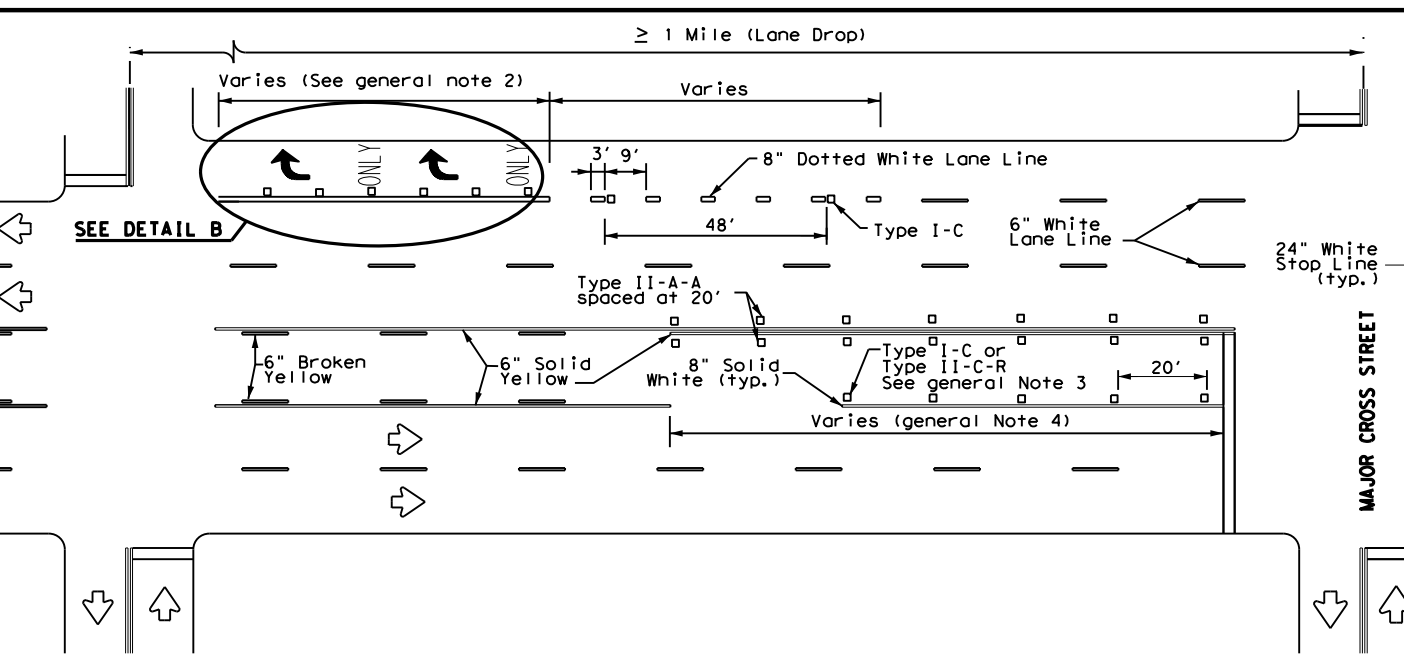

TYPICAL TWLTL AT TWO-WAY CROSS STREET AND RIGHT TURN LANE DROP

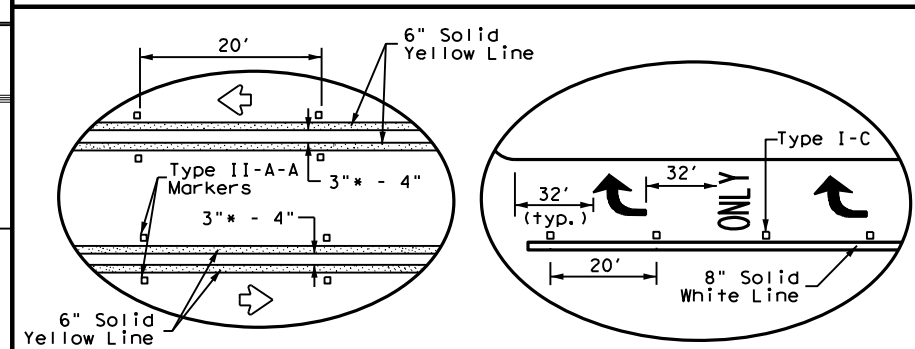

DETAIL A

DETAIL B

* 2" minimum allowed for restripe projects when approved by the Engineer.


Texas Department of Transportation
 Traffic Safety Division Standard

TWO-WAY LEFT TURN LANES, RURAL LEFT TURN BAYS, AND LANE REDUCTION PAVEMENT MARKINGS PM(3) - 22

FILE: pm3-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
4-98 3-03 6-20	DIST	COUNTY	SHEET NO.	
5-00 2-10 12-22	WACO	CoryeII, etc		52
8-00 2-12				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:31:30 AM
 FILE: c:\txdot\pw_online\txdot3\mgt\oba_babiker\0577044\pm4-22a.dgn

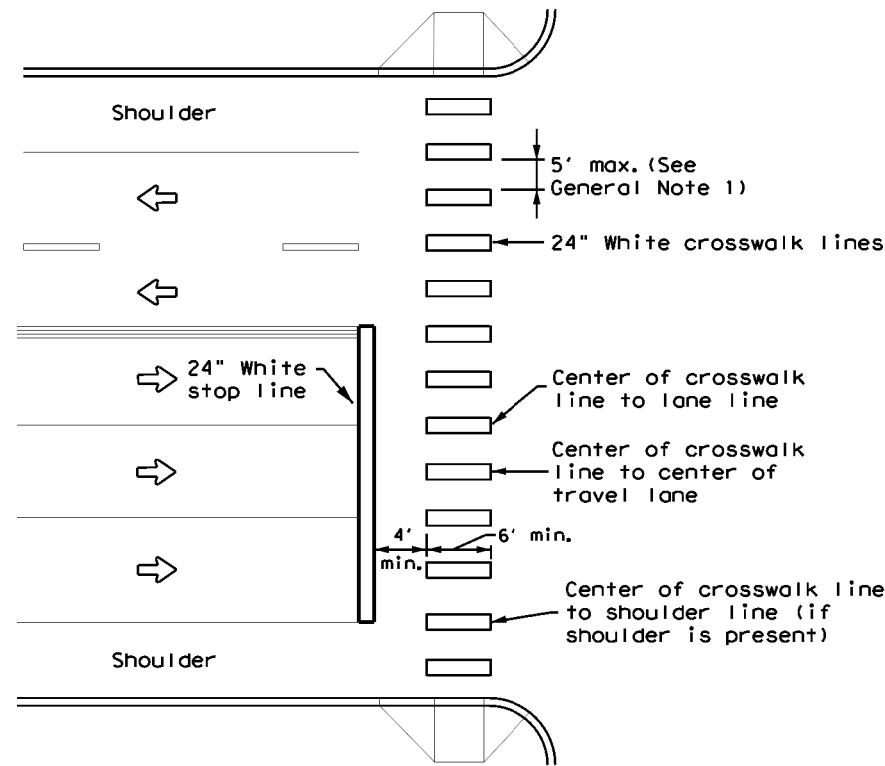


HIGH-VISIBILITY LONGITUDINAL CROSSWALK AT CONTROLLED APPROACH

GENERAL NOTES

1. Longitudinal crosswalk lines should not be placed in the wheel path of vehicles. Center the crosswalk lines on travel lanes, lane lines, and shoulder lines (if present).
2. A minimum 6" clear distance shall be provided to the curb face. If the last crosswalk line falls into this distance it must be omitted.
3. For divided roadways, adjustments in spacing of the crosswalk lines should be made in the median so that the crosswalk lines are maintained in their proper location across the travel portion of the roadway.
4. At skewed crosswalks, the crosswalk lines are to remain parallel to the lane lines.
5. Each crosswalk shall be a minimum of 6' wide.
6. The High-Visibility Longitudinal Crosswalk is the preferred crosswalk pattern on State Highways. Other crosswalk patterns as shown in the "Texas Manual on Uniform Traffic Control Devices" may be used. All crosswalk designs and dimension shall comply with the "Texas Manual on Uniform Traffic Control Devices."
7. Final placement of Stop Bar and Crosswalk shall be approved by the Engineer in the field.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

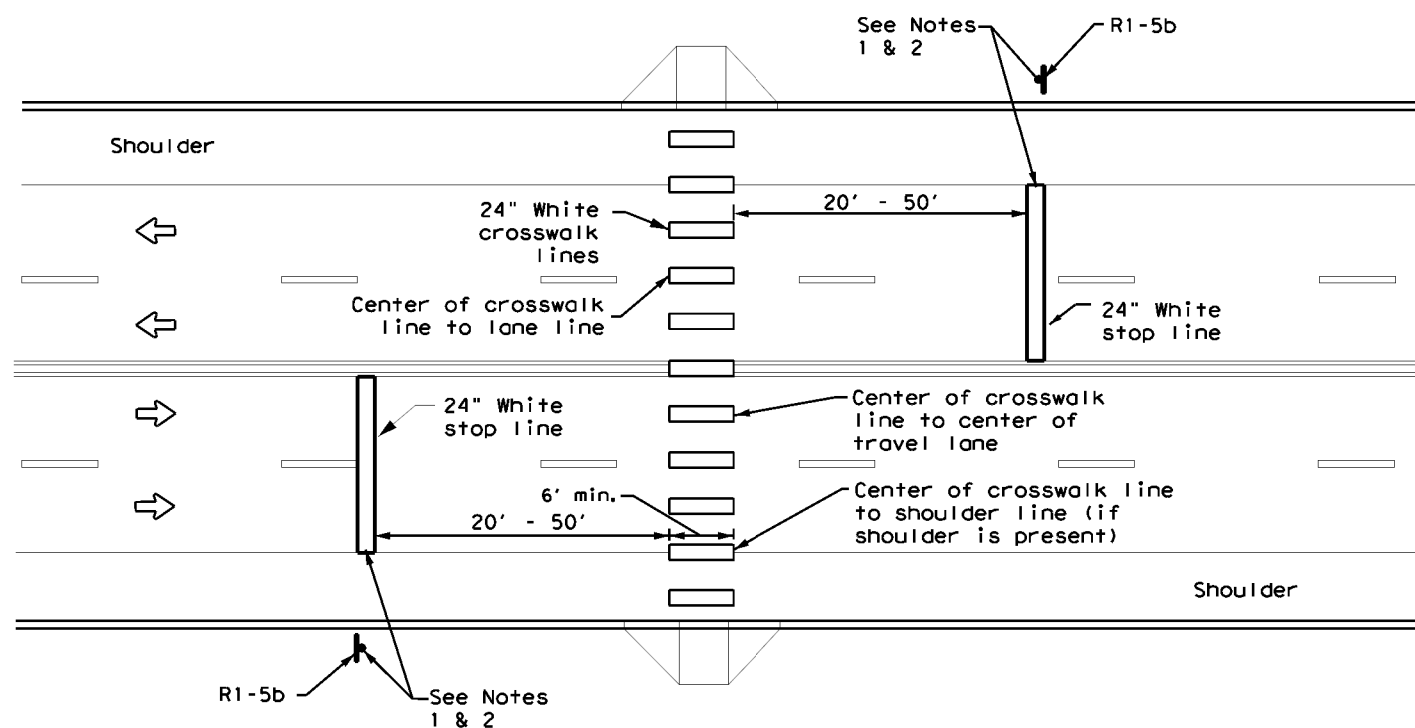

UNSIGNALIZED MIDBLOCK HIGH-VISIBILITY LONGITUDINAL CROSSWALK


NOTES:

1. Use stop bars with Stop Here For Pedestrians (R1-5b) signs at unsignalized midblock crosswalks.
2. Use stop bars with STOP HERE ON RED (R10-6 or R10-6a) signs at mid block crosswalks controlled by traffic signals or pedestrian hybrid beacons.


		Traffic Safety Division Standard	
<h2>CROSSWALK PAVEMENT MARKINGS</h2> <h3>PM(4) - 22A</h3>			
FILE: pm4-22a.dgn	DN:	CK:	DW:
© TxDOT December 2022	CONT	SECT	JOB
REVISIONS	0833	01	009, etc. FM 217, etc
6-20	DIST	COUNTY	SHEET NO.
6-22	WACO	Coryell, etc	53
12-22			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:31:37 AM
 FILE: c:\t\dot\pw_online\txdot3\mgt\oba_bob\ker\0577044\ts2-1-23.dgn

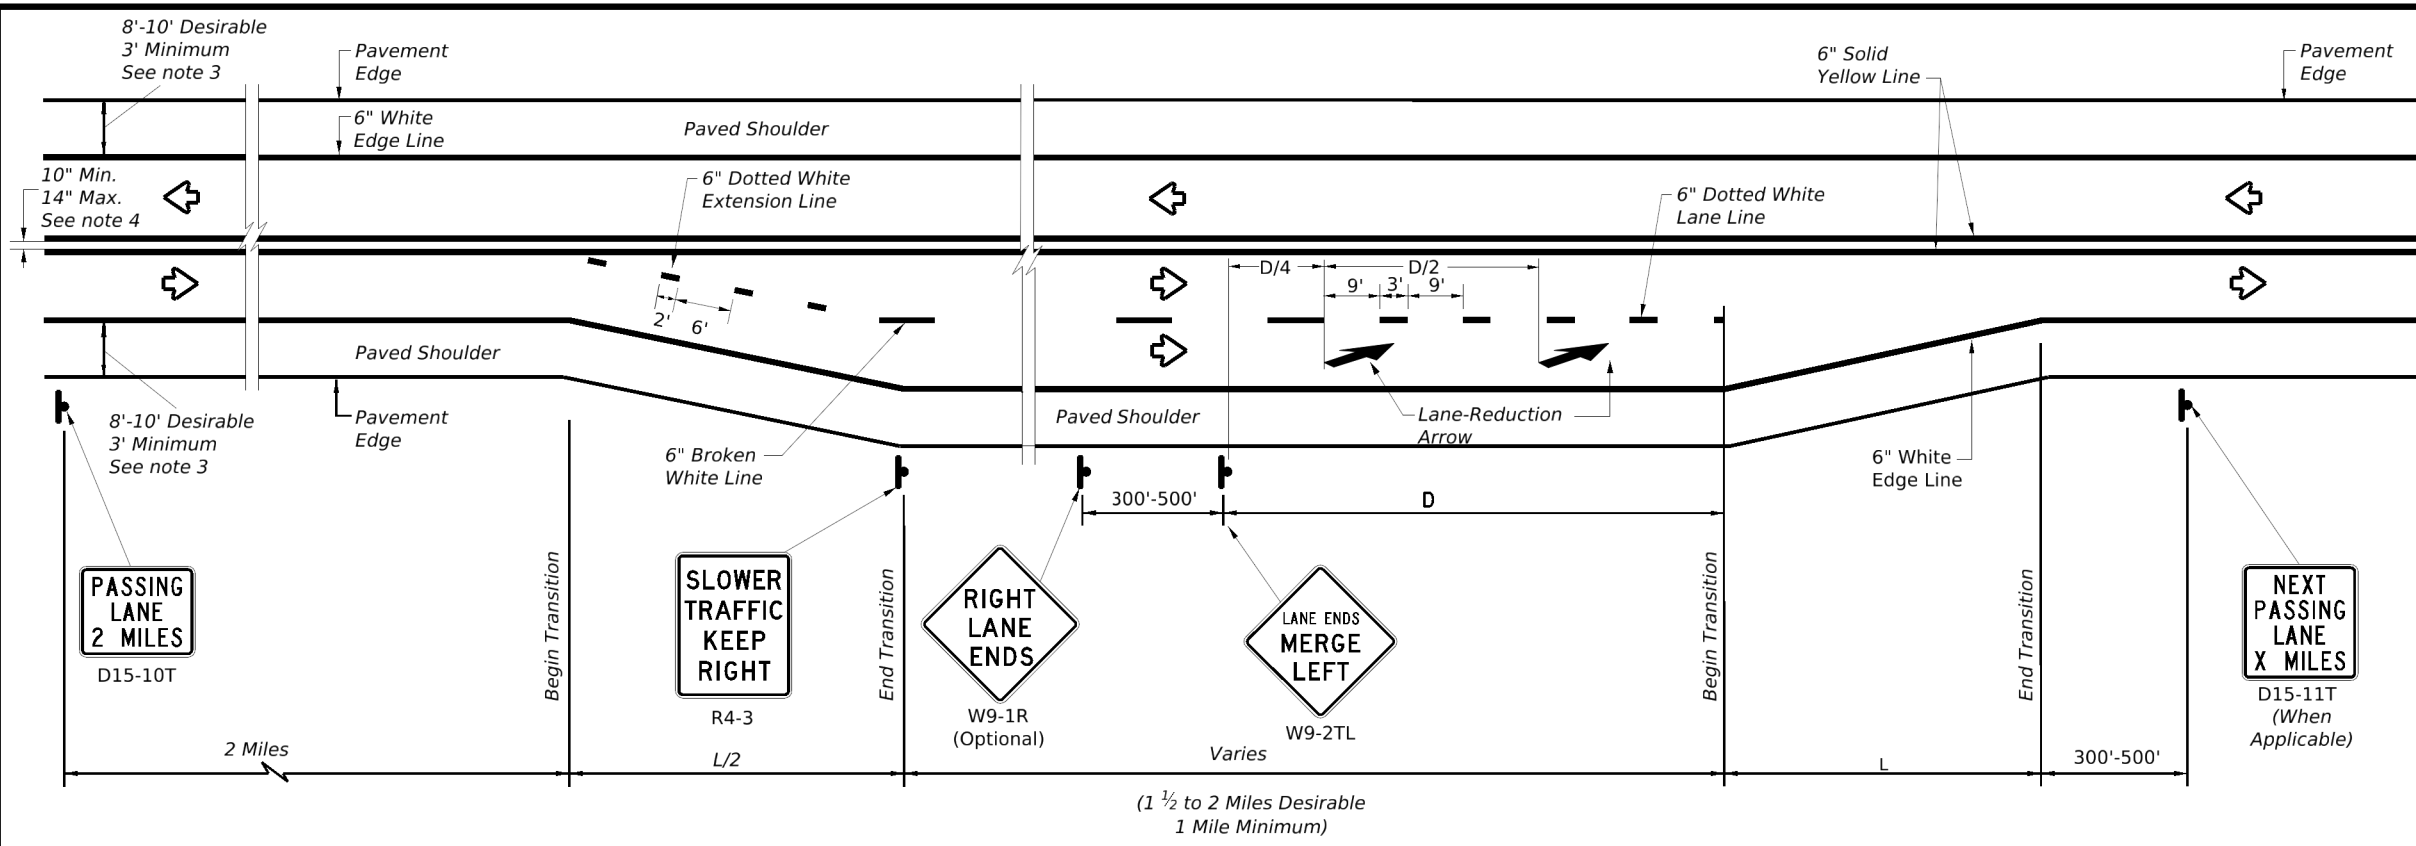

SEPARATED

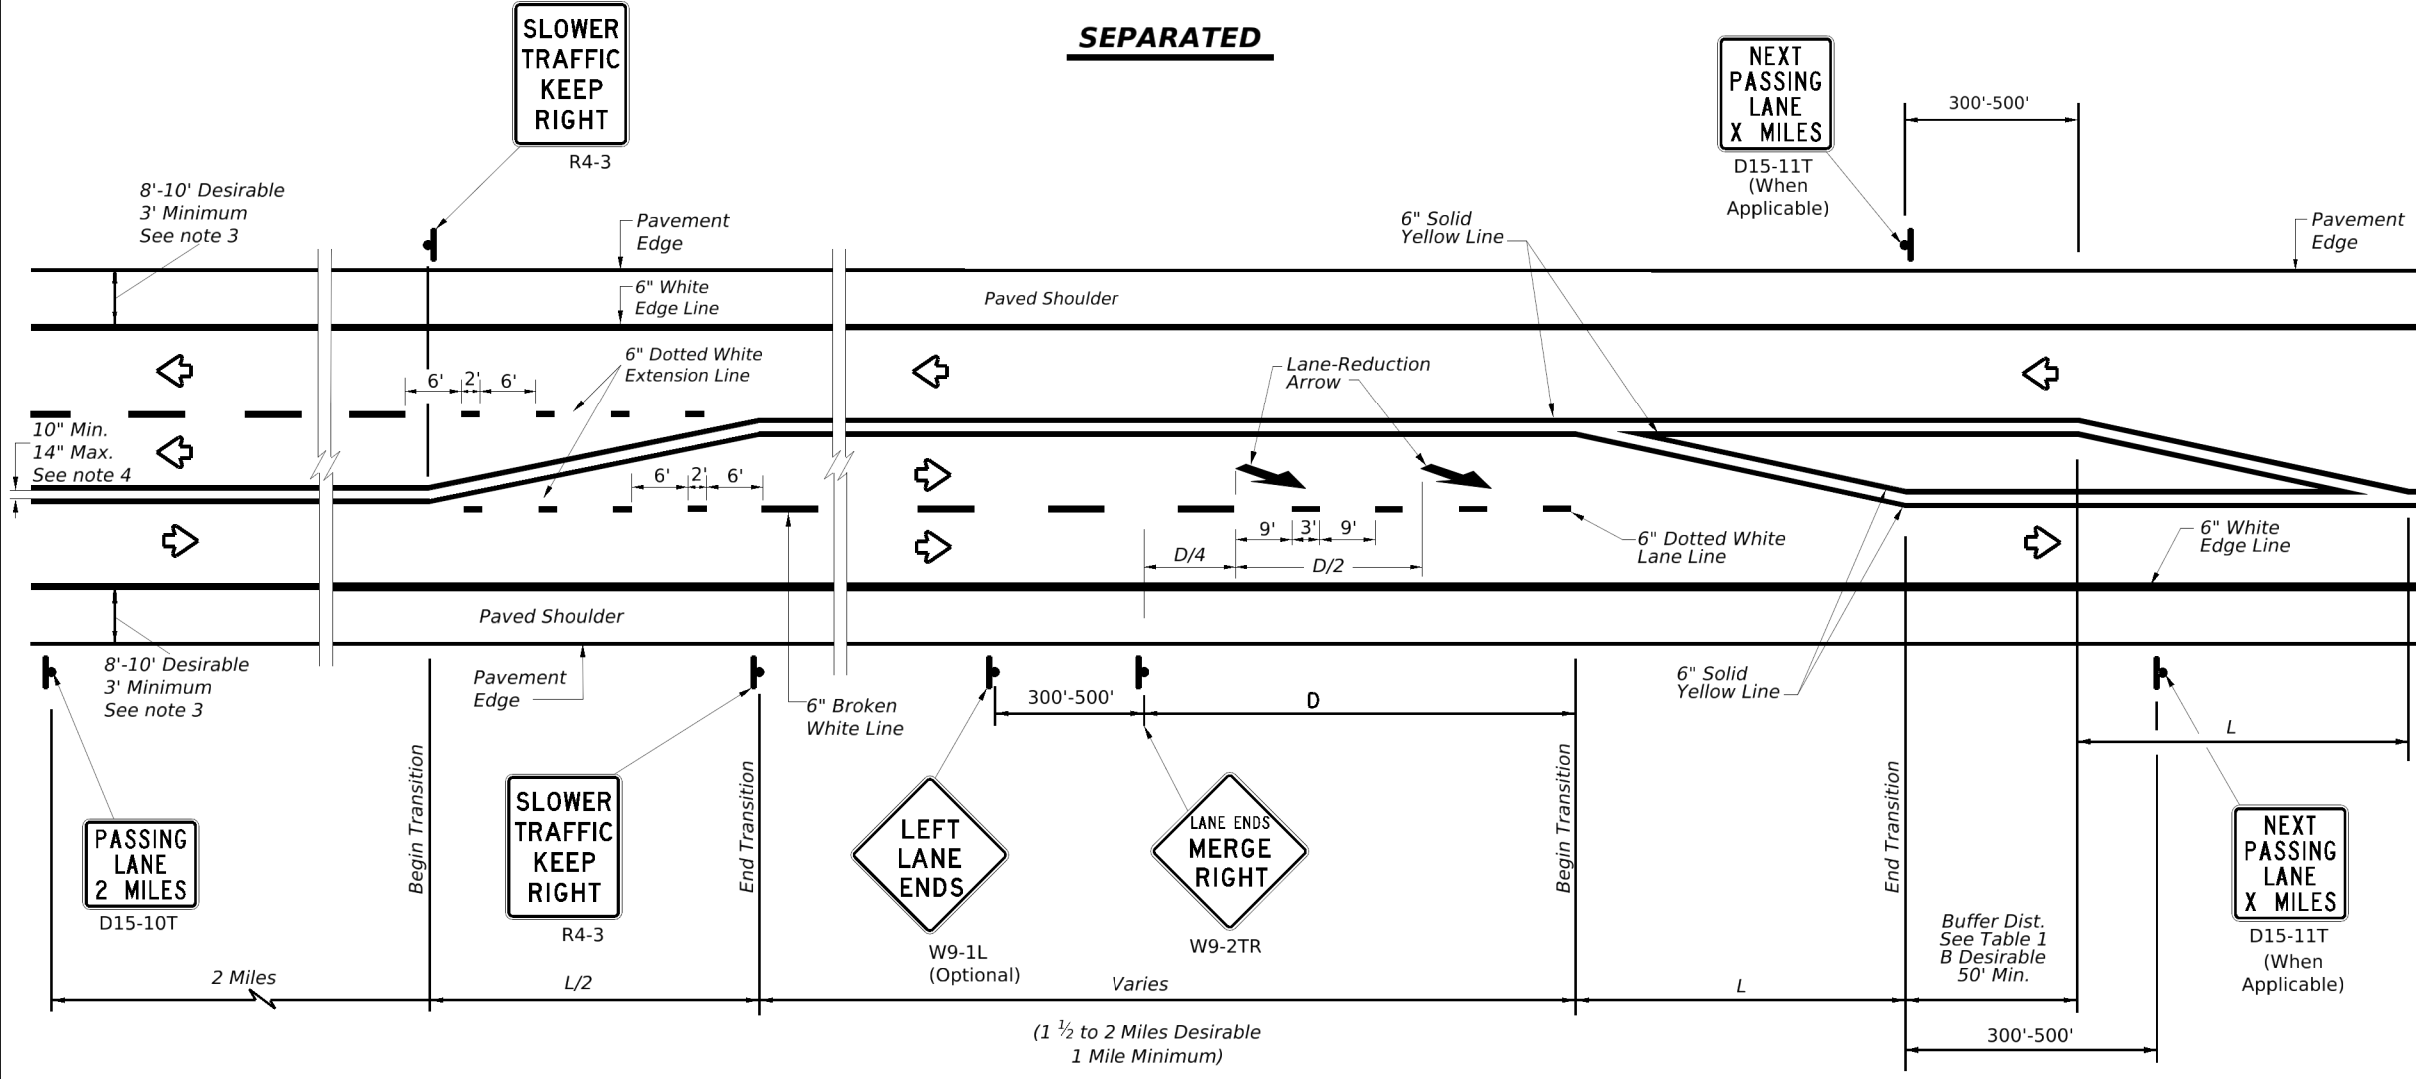

ALTERNATING

LEGEND	
	Sign
	Traffic Flow

TYPICAL TAPER LENGTH (L)	
Formula *	$L = WS$

* Transition length should be rounded up to nearest 5 foot increment.

L=Length of Transition (FT)
 W=Width of Offset (FT)
 S=Posted Speed (MPH)

EXAMPLE
 A 12 foot lane is added on a 70 mph roadway.
 The length of the transition should be:
 $L = 12 \times 70 = 840$ ft

**TABLE 1
 ADVANCE WARNING SIGN
 DISTANCE (D)
 AND BUFFER DISTANCE (B)**

Posted Speed	D (FT)	B (FT)
40	670	305
45	775	360
50	885	425
55	990	495
60	1100	570
65	1200	645
70	1250	730
75	1350	820

GENERAL NOTES

- For minimum and desirable design details, see the Roadway Design Manual, Chapter 4, Section 6, Super 2 Highways.
- For Raised Pavement Markers (RPM) details, see Pavement Markings Standard sheet, PM(2) - Centerline for All Two Lane Two-Way Roadways. Note that RPMs are not recommended on the 6" dotted white extension lines.
- For rumble strip options available for the designed shoulder width, see Rumble Strip Standard sheet RS(2).
- For pavement marking details, see Pavement Marking Standard sheet PM(1).




**TEXAS SUPER 2
 PASSING LANES**

TS2(PL-1)-23

FILE: ts2-1-23.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2023	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
5-10 3-18	DIST	COUNTY	SHEET NO.	
2-12 2-23	WACO	Coryell, etc	54	
3-12				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:31:44 AM
 FILE: c:\txdot\pw_onlinetxdot3\mogtaba_babiker\0577044\ts2-2-23.dgn

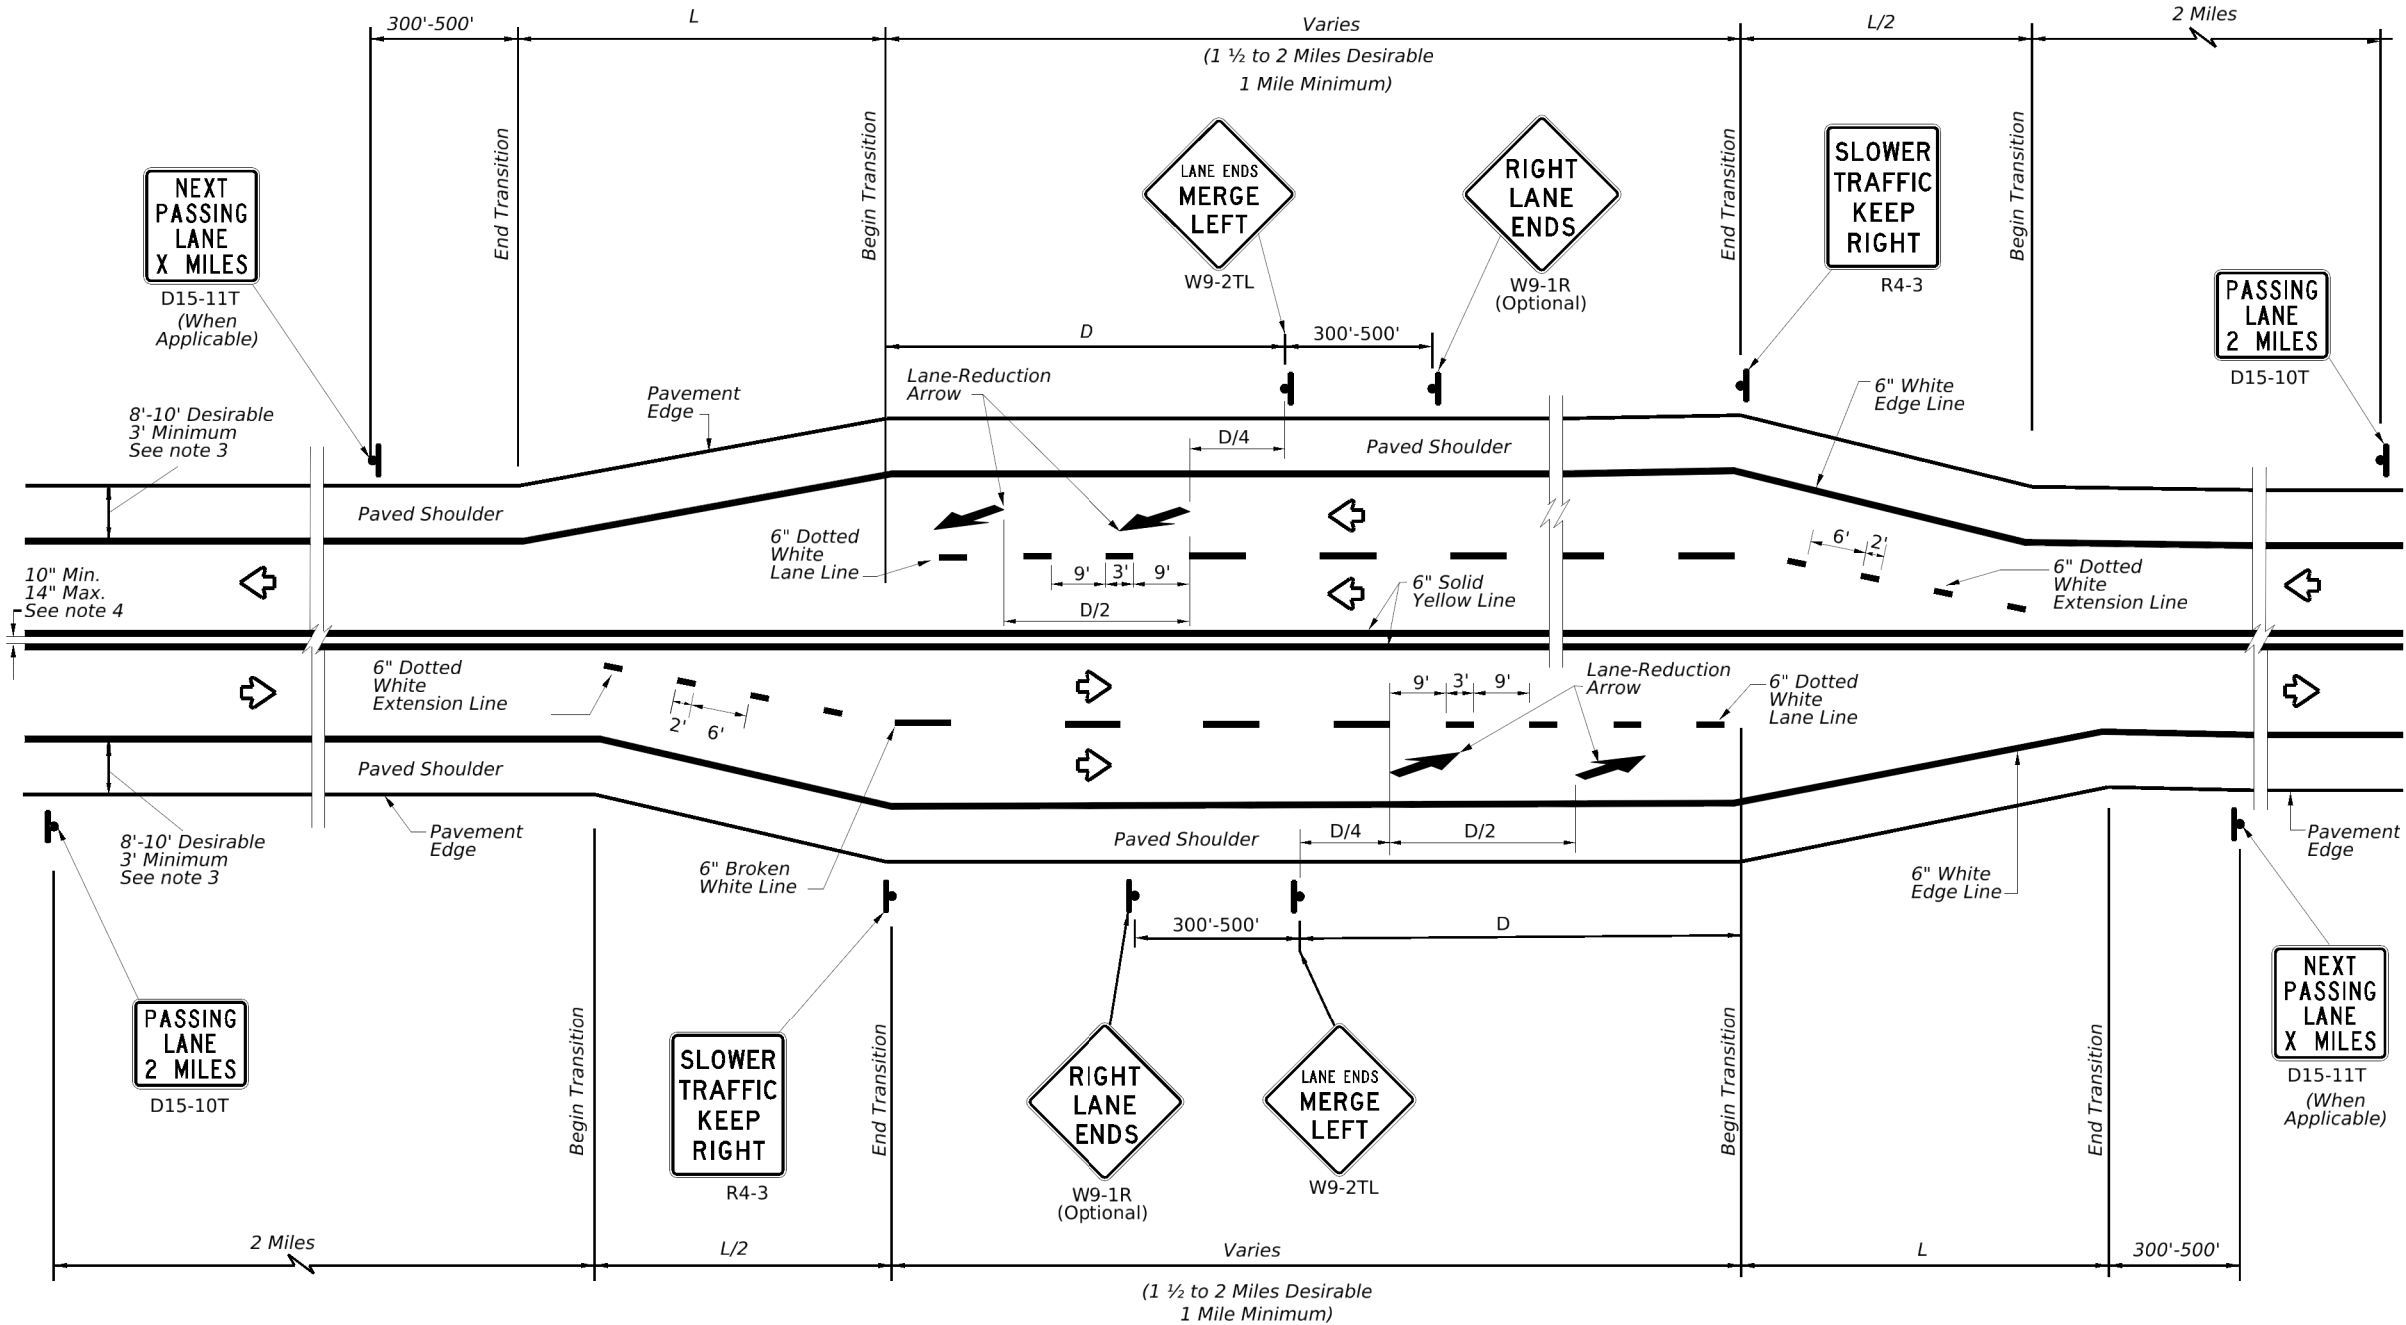

SIDE BY SIDE PASSING LANES

LEGEND	
	Sign
	Traffic Flow

TYPICAL TAPER LENGTH (L)	
Formula *	$L = WS$

* Transition length should be rounded up to nearest 5 foot increment.
 L=Length of Transition (FT)
 W=Width of Offset (FT)
 S=Posted Speed (MPH)

EXAMPLE
 A 12 foot lane is added on a 70 mph roadway.
 The length of the transition should be:
 $L=12 \times 70=840$ ft

**TABLE 1
 ADVANCE WARNING SIGN DISTANCE (D)**

Posted Speed	D (FT)
40	670
45	775
50	885
55	990
60	1100
65	1200
70	1250
75	1350

GENERAL NOTES

1. For minimum and desirable design details, see the Roadway Design Manual, Chapter 4, Section 6, Super 2 Highways.
2. For Raised Pavement Markers (RPM) details, see Pavement Markings Standard sheet, PM(2) - Centerline for All Two Lane Two-Way Roadways. Note that RPMs are not recommended on the 6" dotted white extension lines.
3. For rumble strip options available for the designed shoulder width, see Rumble Strip Standard sheet RS(2).
4. For pavement marking details, see Pavement Marking Standard sheet PM(1).





**TEXAS SUPER 2
 PASSING LANES**

TS2(PL-2)-23


FILE: ts2-2-23.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2023	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
5-10 3-18	DIST	COUNTY	SHEET NO.	
2-12 2-23	WACO	Coryell, etc	55	
3-12				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 7/6/2023 8:31:49 AM
 FILE: c:\txdot\pw_online\txdot3\mgt\aba_babiker\0577044\rcd1-22.dgn

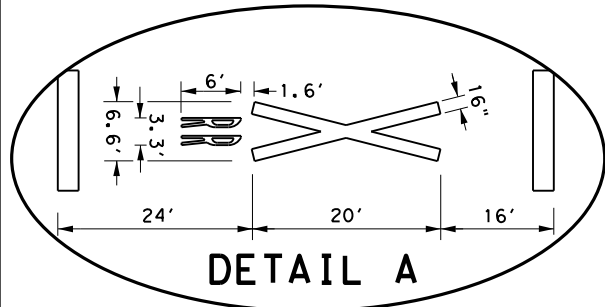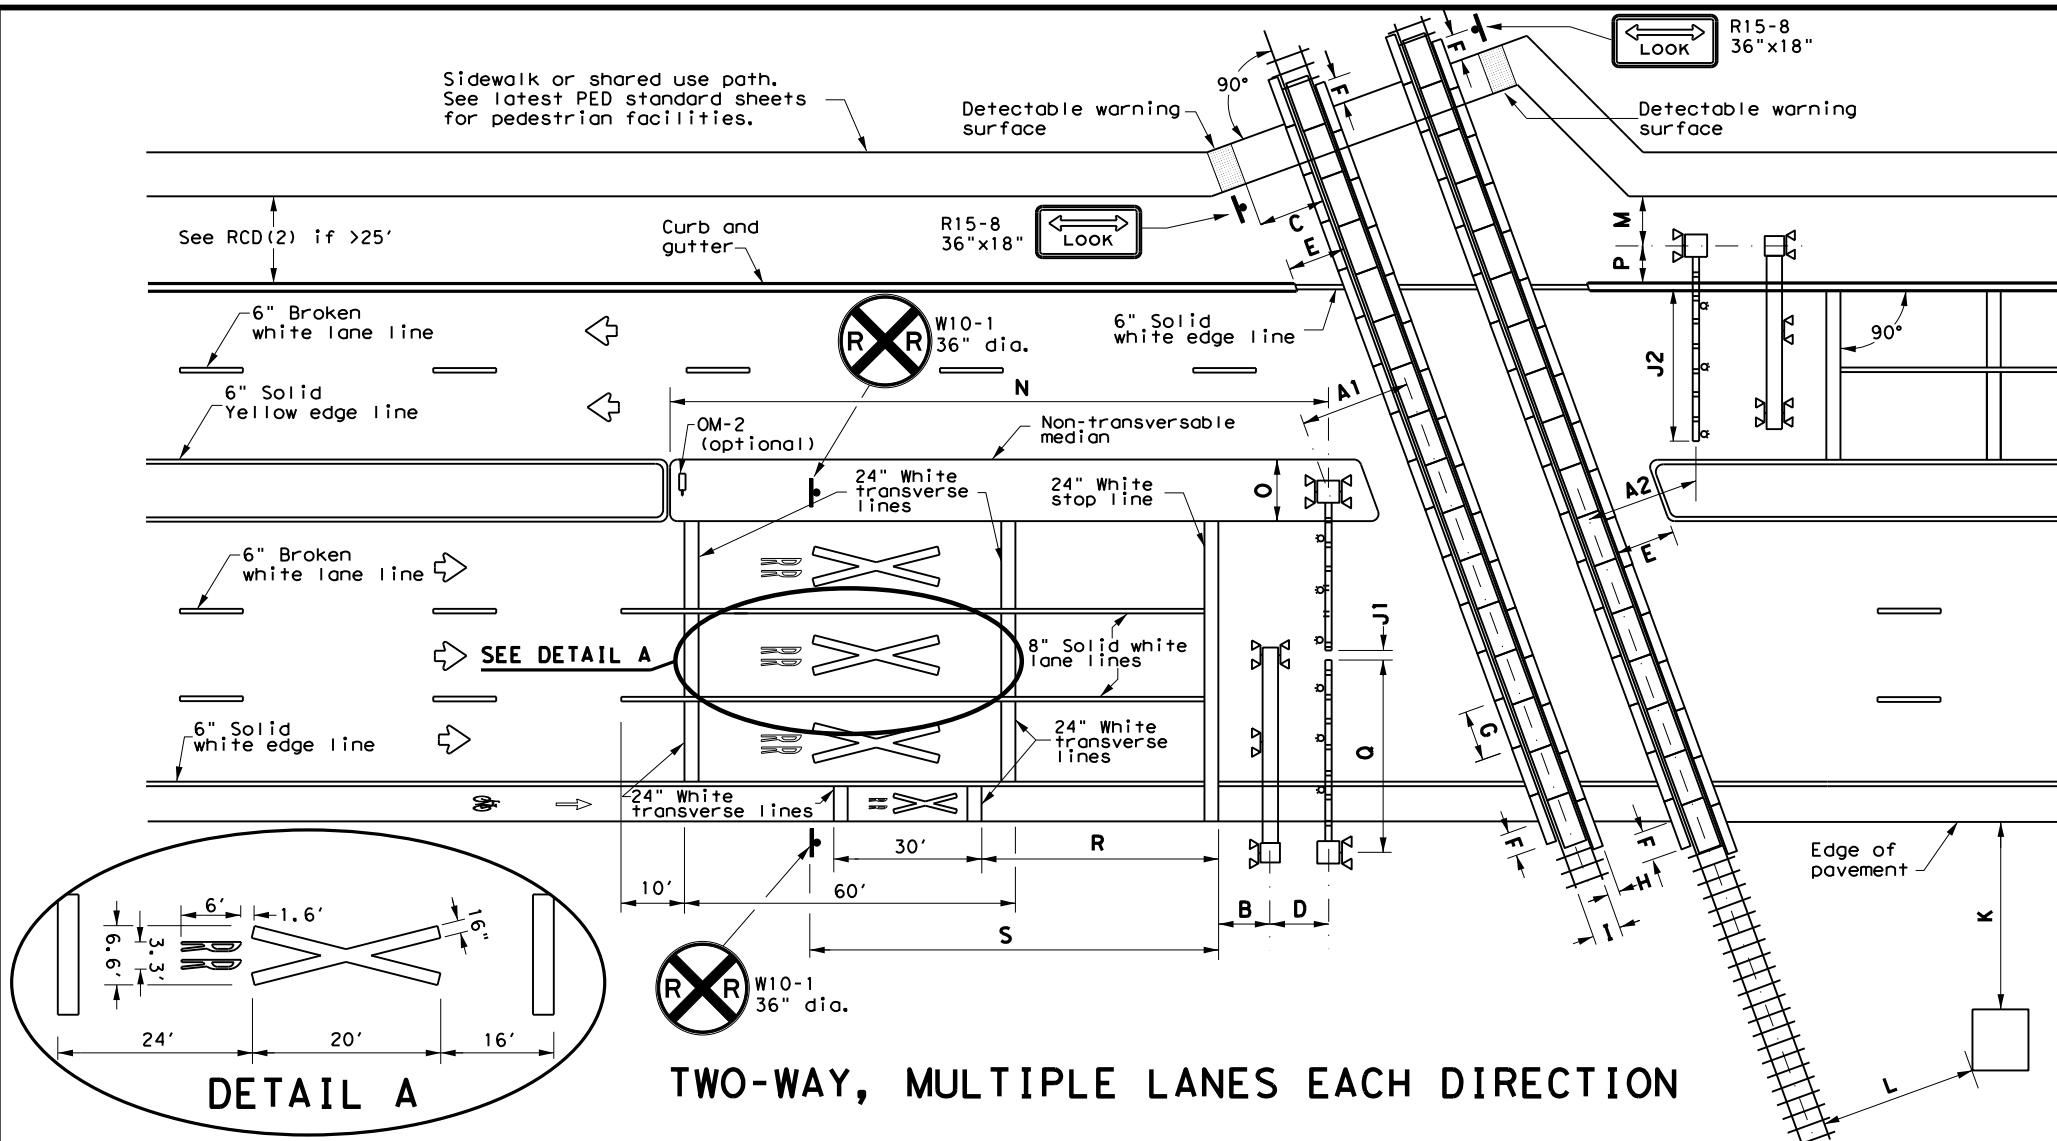

TWO-WAY, MULTIPLE LANES EACH DIRECTION

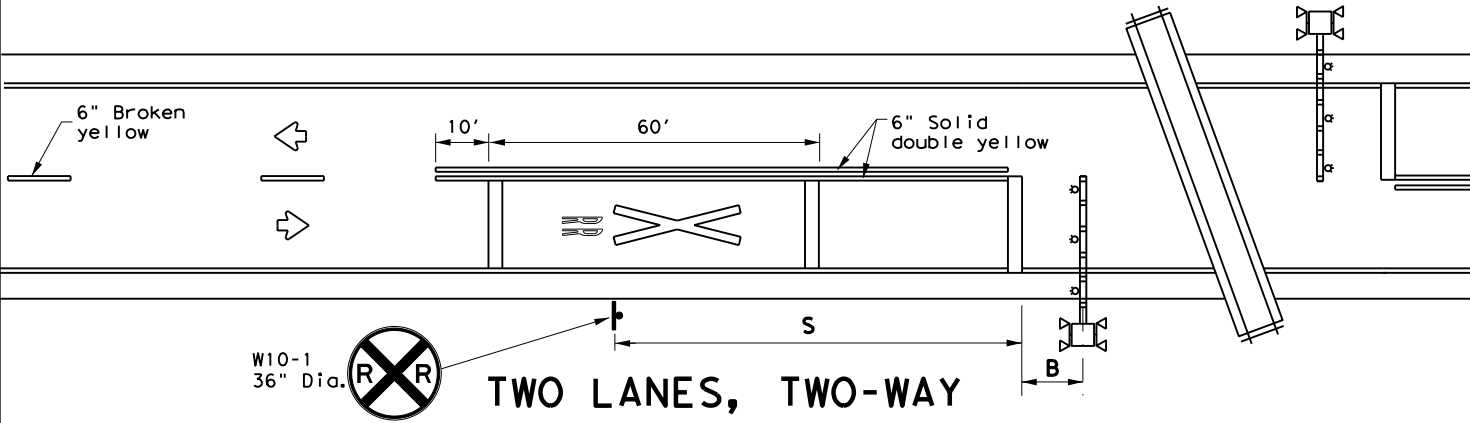

TWO LANES, TWO-WAY

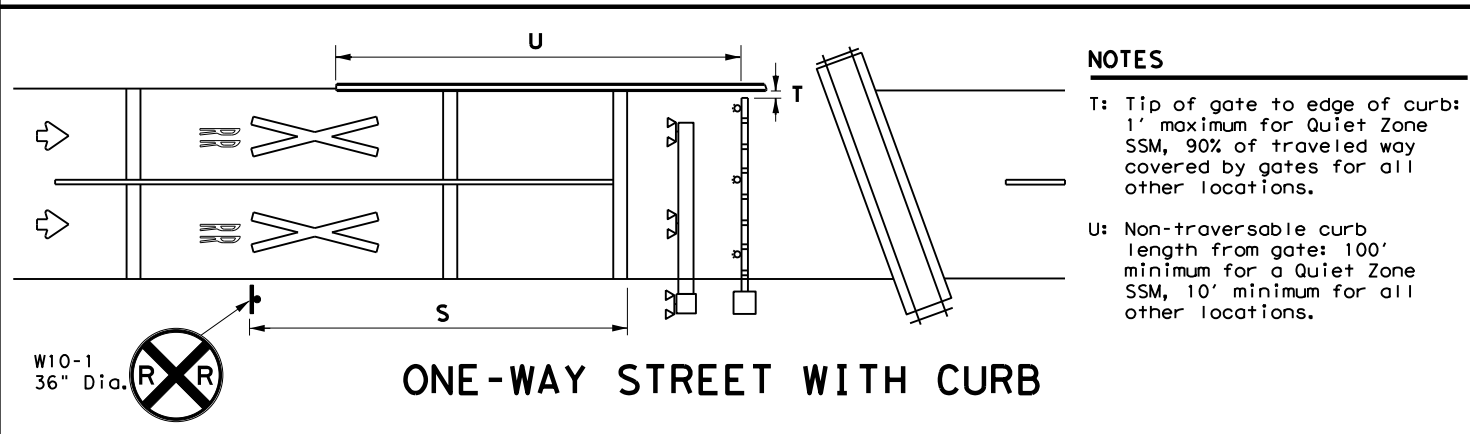

- NOTES**
- T: Tip of gate to edge of curb: 1' maximum for Quiet Zone SSM, 90% of traveled way covered by gates for all other locations.
 - U: Non-transversible curb length from gate: 100' minimum for a Quiet Zone SSM, 10' minimum for all other locations.


TABLE 1

Approach Speed (mph)	Desirable Placement (feet)
20	100
25	100
30	100
35	100
40	125
45	175
50	250
55	325
60	400
65	475
70	550
75	650

LEGEND

	Sign
	Object Marker
	Traffic Flow
	Cantilever
	Gate Assembly
	Mast Flasher Pair

- GENERAL NOTES**
- Medians and curbs must be non-traversable to qualify as a Quiet Zone Supplementary Safety Measure (SSM). Non-traversable curbs in Quiet Zones are 6" tall minimum and used on roadways where speed does not exceed 40 mph.
 - Raised pavement markers may be used to supplement striping. See PM(2) and PM(3) standard sheets.
 - Medians preferred whenever possible to prevent vehicles from driving around gates.
 - Longitudinal edge striping may be continued thru crossing as needed. Illumination may also be considered for nighttime visibility.
 - See SMD standard sheets for sign mounting details.
 - See the Standard Highway Sign Design for Texas (SHSD) manual for sign and pavement marking details.

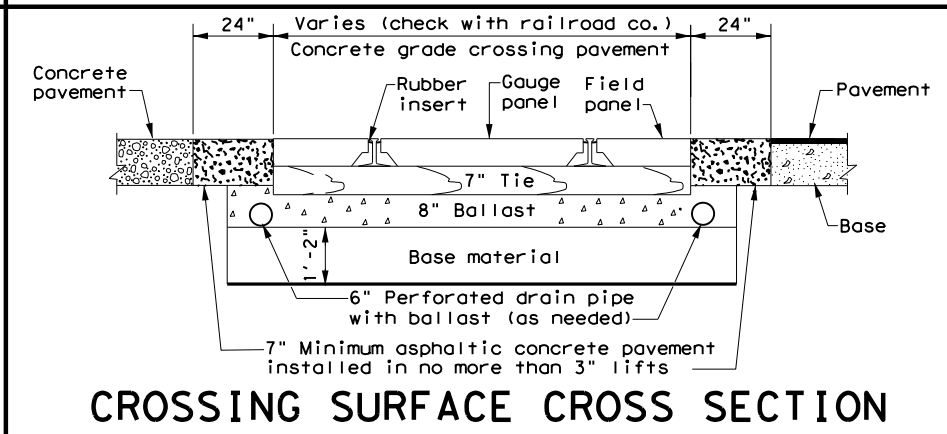

CROSSING SURFACE CROSS SECTION


- NOTES**
- A1: Center of RR mast to center of rail: 12' minimum, 15' typical.
 - A2: Tip of gate to center of rail: 12' minimum, 15' typical.
 - B: Center of mast (cantilever, gate, or mast flasher) of nearest active traffic control device to stop line: 8' (NOTE: Stop line may be moved as needed, but should be at least 8' back from gates, if present).
 - C: Near edge of detectable warning surface to nearest rail: 12' minimum.
 - D: Center of gate mast to center of cantilever mast: 6' typical. NOTE: Cantilever may be located in front or behind gates.
 - E: Edge of median or curb to nearest rail: 10' typical. NOTE: Design median edge to be parallel with rail.
 - F: Edge of planking panel from edge of pavement or sidewalk: 3' minimum. NOTE: Field panels need not be in line with gauge panels.
 - G: Length of panels along rail: 8' typical.
 - H: Width of field panel: 2' typical (check with railroad company).
 - I: Distance between rails: 4'- 8'1/2".
 - J1: Tip of gate to tip of gate: 2' maximum.
 - J2: 90% of traveled roadway to be covered by gate.
 - K: Nearest edge of RR cabinet from edge of pavement: 30' typical. NOTE: Cabinet not required to be parallel to edge of pavement.
 - L: Nearest edge of RR cabinet from nearest rail: 25' typical.
 - M: Center of RR mast to edge of sidewalk: 6' minimum.
 - N: Center of gate mast to leading edge of non-traversable median: 100' minimum to qualify as a Quiet Zone SSM. NOTE: 60' will suffice if there is a street intersection within the 100' and all street intersections within 60' are closed.
 - O: Width of median for RR gate assembly: 8'-6" minimum, 10' typical when using median gates. NOTE: Center of gate mast minimum 4'-3" from face of curb.
 - P: Center of RR mast to face of curb: 5'-3" minimum. Center of RR mast to edge of pavement (with shoulder): 7' minimum. Center of RR mast to edge of pavement (no shoulder): 9'-3" minimum. NOTE: Final location determined by the railroad company.
 - Q: Gate length: 28' or less typical, but railroad company may allow up to 32' under special circumstances.
 - R: Stop line to first RR Crossing transverse line (bike lane): 50' typical.
 - S: Stop line to GRADE CROSSING ADVANCE WARNING (W10-1) sign and adjacent RR Crossing pavement markings. See Table 1. See RCD(2) for other signs.

Texas Department of Transportation
 Traffic Safety Division Standard

**RAILROAD CROSSING DETAILS
 SIGNING, STRIPING, AND
 DEVICE PLACEMENT
 RCD(1)-22**


FILE: rcd1-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT November 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
2-16	DIST	COUNTY	SHEET NO.	
11-22	WACO	Coryell, etc	56	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 7/6/2023 8:31:53 AM
 FILE: c:\t\dot\p_w_online\t\dot3\magtaba_babiker\0577044\rcd2-22.dgn

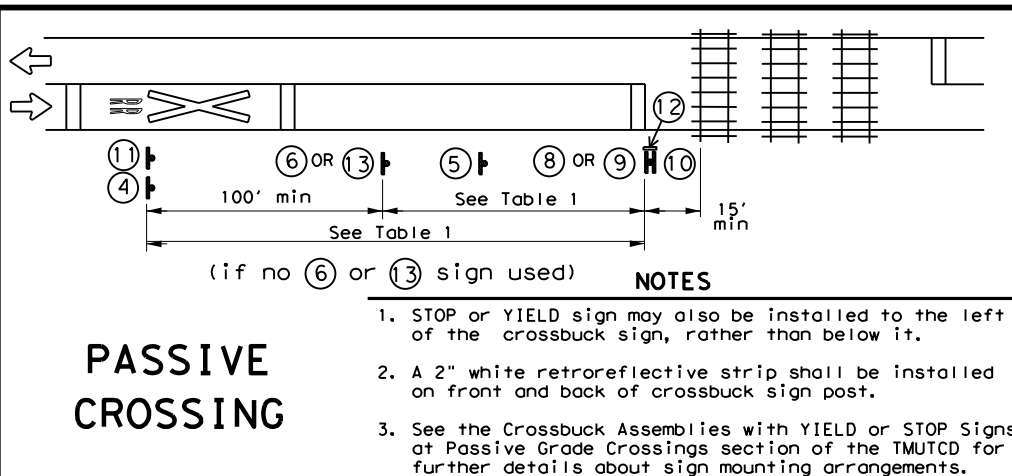

PASSIVE CROSSING

- NOTES**
- STOP or YIELD sign may also be installed to the left of the crossbuck sign, rather than below it.
 - A 2" white retroreflective strip shall be installed on front and back of crossbuck sign post.
 - See the Crossbuck Assemblies with YIELD or STOP Signs at Passive Grade Crossings section of the TMUTCD for further details about sign mounting arrangements.

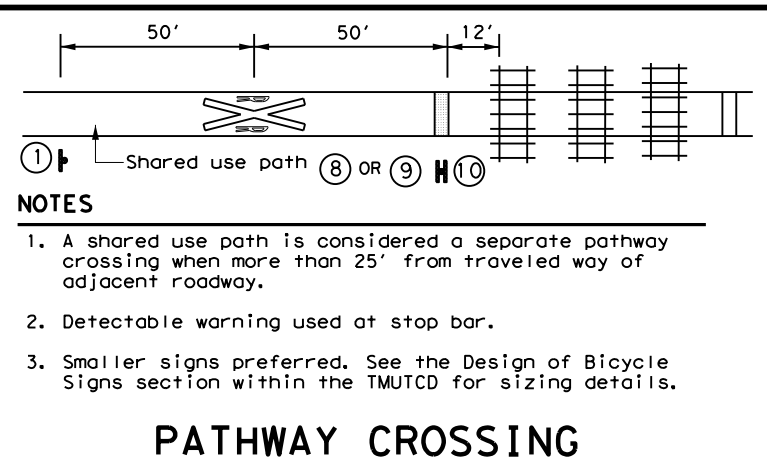


PATHWAY CROSSING

- NOTES**
- A shared use path is considered a separate pathway crossing when more than 25' from traveled way of adjacent roadway.
 - Detectable warning used at stop bar.
 - Smaller signs preferred. See the Design of Bicycle Signs section within the TMUTCD for sizing details.

Approach Speed (mph)	Desirable Placement (feet)
20	100
25	100
30	100
35	100
40	125
45	175
50	250
55	325
60	400
65	475
70	550
75	650


- GENERAL NOTES**
- Railroad company to provide active traffic control devices, CROSSBUCK (R15-1), NUMBER OF TRACKS (R15-2P) plaque (if more than 1 track), and EMERGENCY NOTIFICATION (I-13) signs.
 - LOW GROUND CLEARANCE (W10-5) signs may be relocated further upstream of crossing to provide advance warning of alternate route.
 - GRADE CROSSING AND INTERSECTION ADVANCE WARNING (W10-2) signs may be modified as needed to fit roadway geometry.
 - Table 1 placement distances may vary per the Placement of Warning Signs section of the TMUTCD.
 - See Table 1 to determine placement of STOP AHEAD (W3-1) and YIELD AHEAD (W3-2) signs unless shown otherwise.
 - DO NOT STOP ON TRACKS (R8-8) signs installed when potential for vehicles stopping on tracks is significant as determined by sealing engineer. Install so sign does not block view of RR mast.
 - See the Standard Highway Sign Design for Texas (SHSD) manual for sign and pavement marking details.

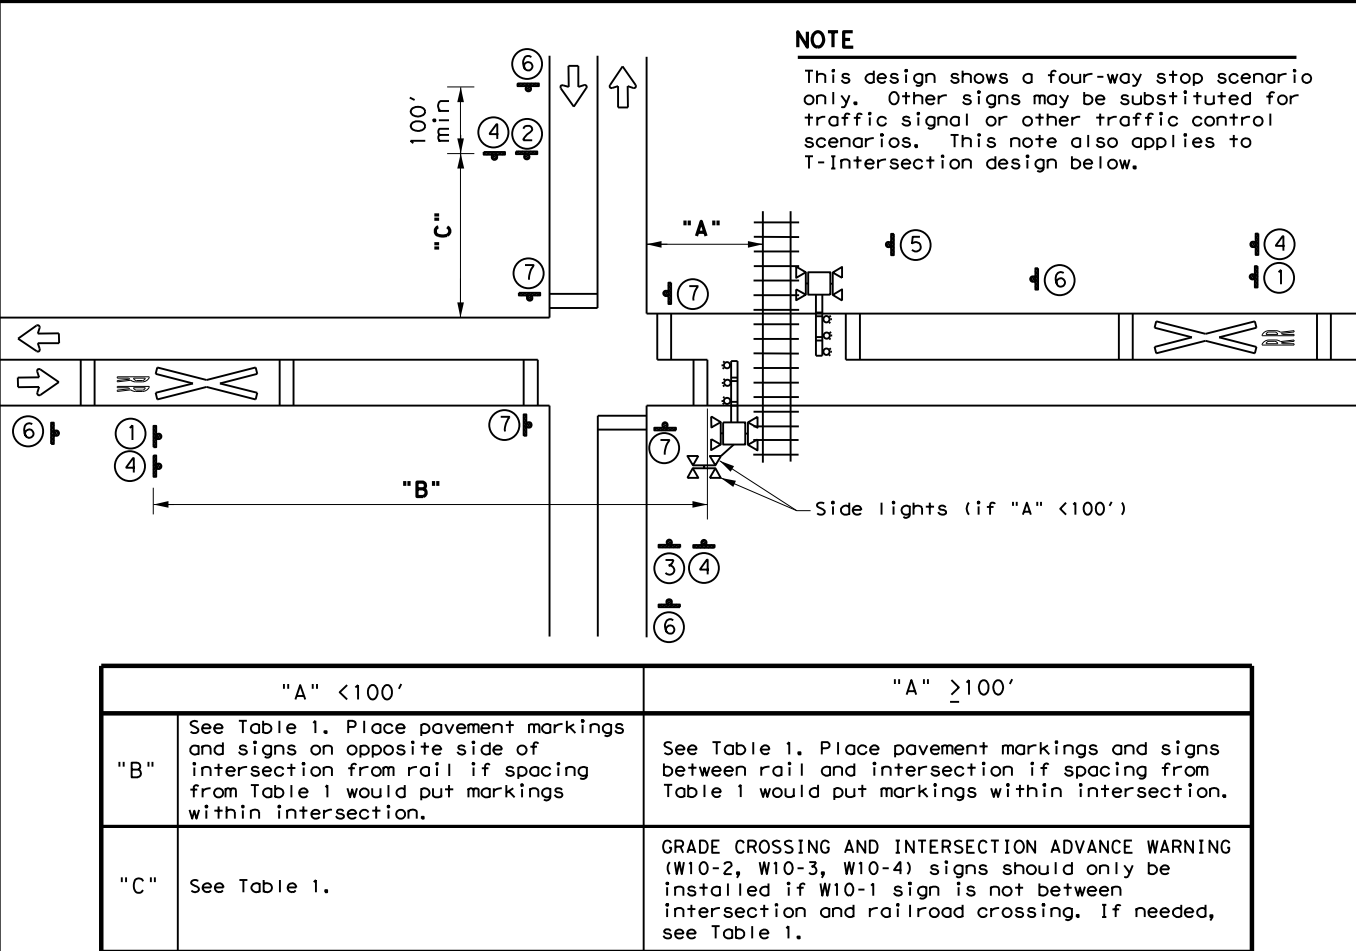

NOTE
 This design shows a four-way stop scenario only. Other signs may be substituted for traffic signal or other traffic control scenarios. This note also applies to T-intersection design below.

	"A" < 100'	"A" ≥ 100'
"B"	See Table 1. Place pavement markings and signs on opposite side of intersection from rail if spacing from Table 1 would put markings within intersection.	See Table 1. Place pavement markings and signs between rail and intersection if spacing from Table 1 would put markings within intersection.
"C"	See Table 1.	GRADE CROSSING AND INTERSECTION ADVANCE WARNING (W10-2, W10-3, W10-4) signs should only be installed if W10-1 sign is not between intersection and railroad crossing. If needed, see Table 1.

GRADE CROSSING NEAR A PARALLEL STREET

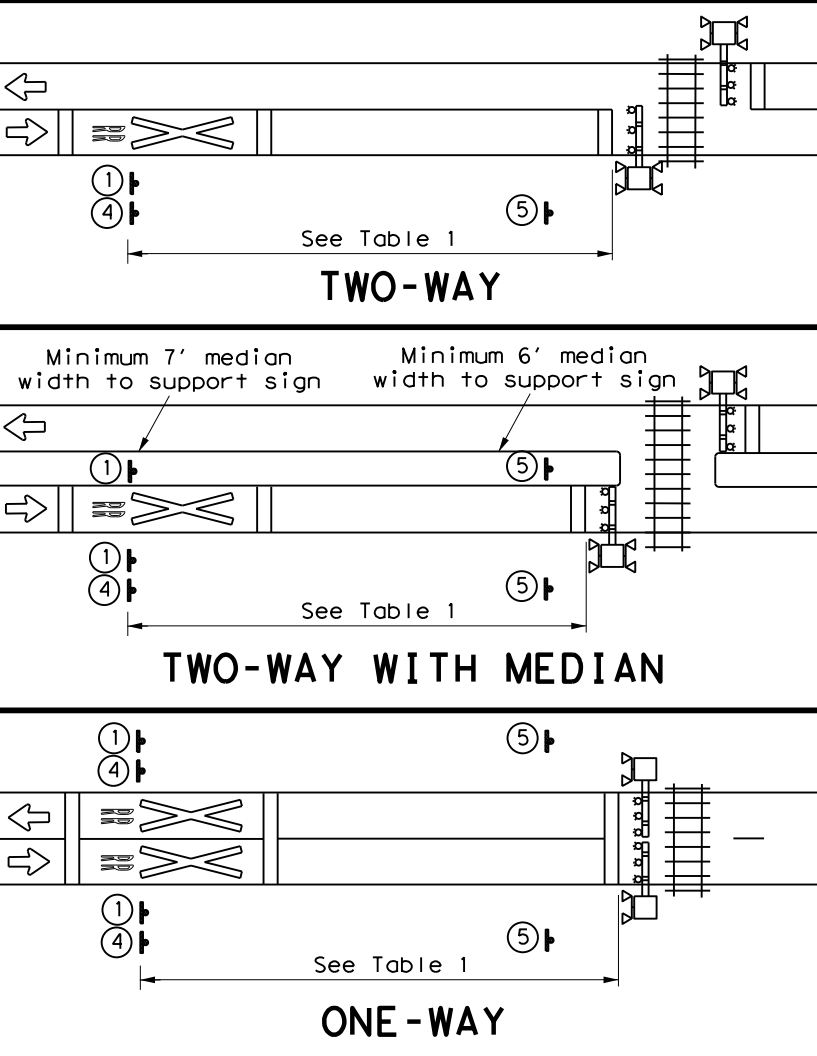


TWO-WAY

TWO-WAY WITH MEDIAN

ONE-WAY


SIGNS

(1) W10-1 36" Dia.	(2) W10-2L 36" X 36"	(3) W10-2R 36" X 36"	(4) IF NEEDED LOW GROUND CLEARANCE W10-5P 30" X 24"
(5) R8-8 24" X 30"	(6) W3-1 30" X 30"	(7) R1-1 36" X 36" ALL WAY R1-3P 18" X 6"	(8) R15-1 48" X 9" R15-2P 27" X 18" R1-1 36" X 36"
(9) R15-1 48" X 9" R15-2P 27" X 18"	(10) R15-1 48" X 9" R15-2P 27" X 18"	(11) ** W10-1 36" Dia. NO GATES OR LIGHTS W10-13P 30" X 24"	(12) I-13 15" X 9" REPORT EMERGENCY OR PROBLEM 1-800-555-5555 CROSSING 836 597 H
(13) W3-2 30" X 30"	** Includes a NO TRAIN HORN (W10-9P) plaque if crossing is in a Quiet Zone. If needed, is mounted below W10-2/W10-3/W10-4 signs.		

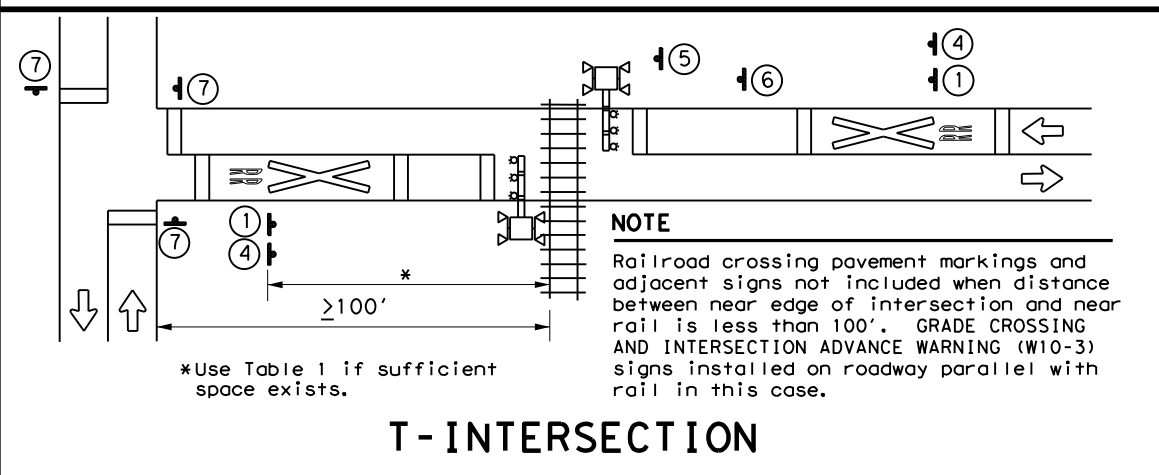

T-INTERSECTION

NOTE
 Railroad crossing pavement markings and adjacent signs not included when distance between near edge of intersection and near rail is less than 100'. GRADE CROSSING AND INTERSECTION ADVANCE WARNING (W10-3) signs installed on roadway parallel with rail in this case.

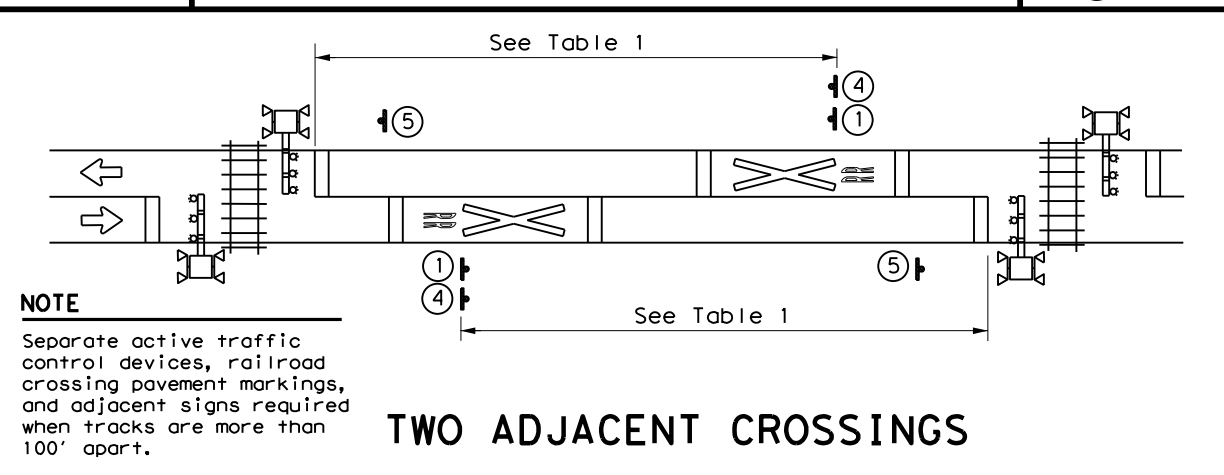

TWO ADJACENT CROSSINGS

NOTE
 Separate active traffic control devices, railroad crossing pavement markings, and adjacent signs required when tracks are more than 100' apart.

Texas Department of Transportation Traffic Safety Division Standard



RAILROAD CROSSING DETAILS SIGNING & STRIPING

RCD(2) - 22


FILE: rcd2-22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2022	CONT	SECT	JOB	HIGHWAY
2-16	0833	01	009, etc.	FM 217, etc
11-22	DIST	COUNTY	SHEET NO.	
	WACO	Coryell, etc	57	

RUMBLE STRIP TYPICAL APPLICATION

See Note 1

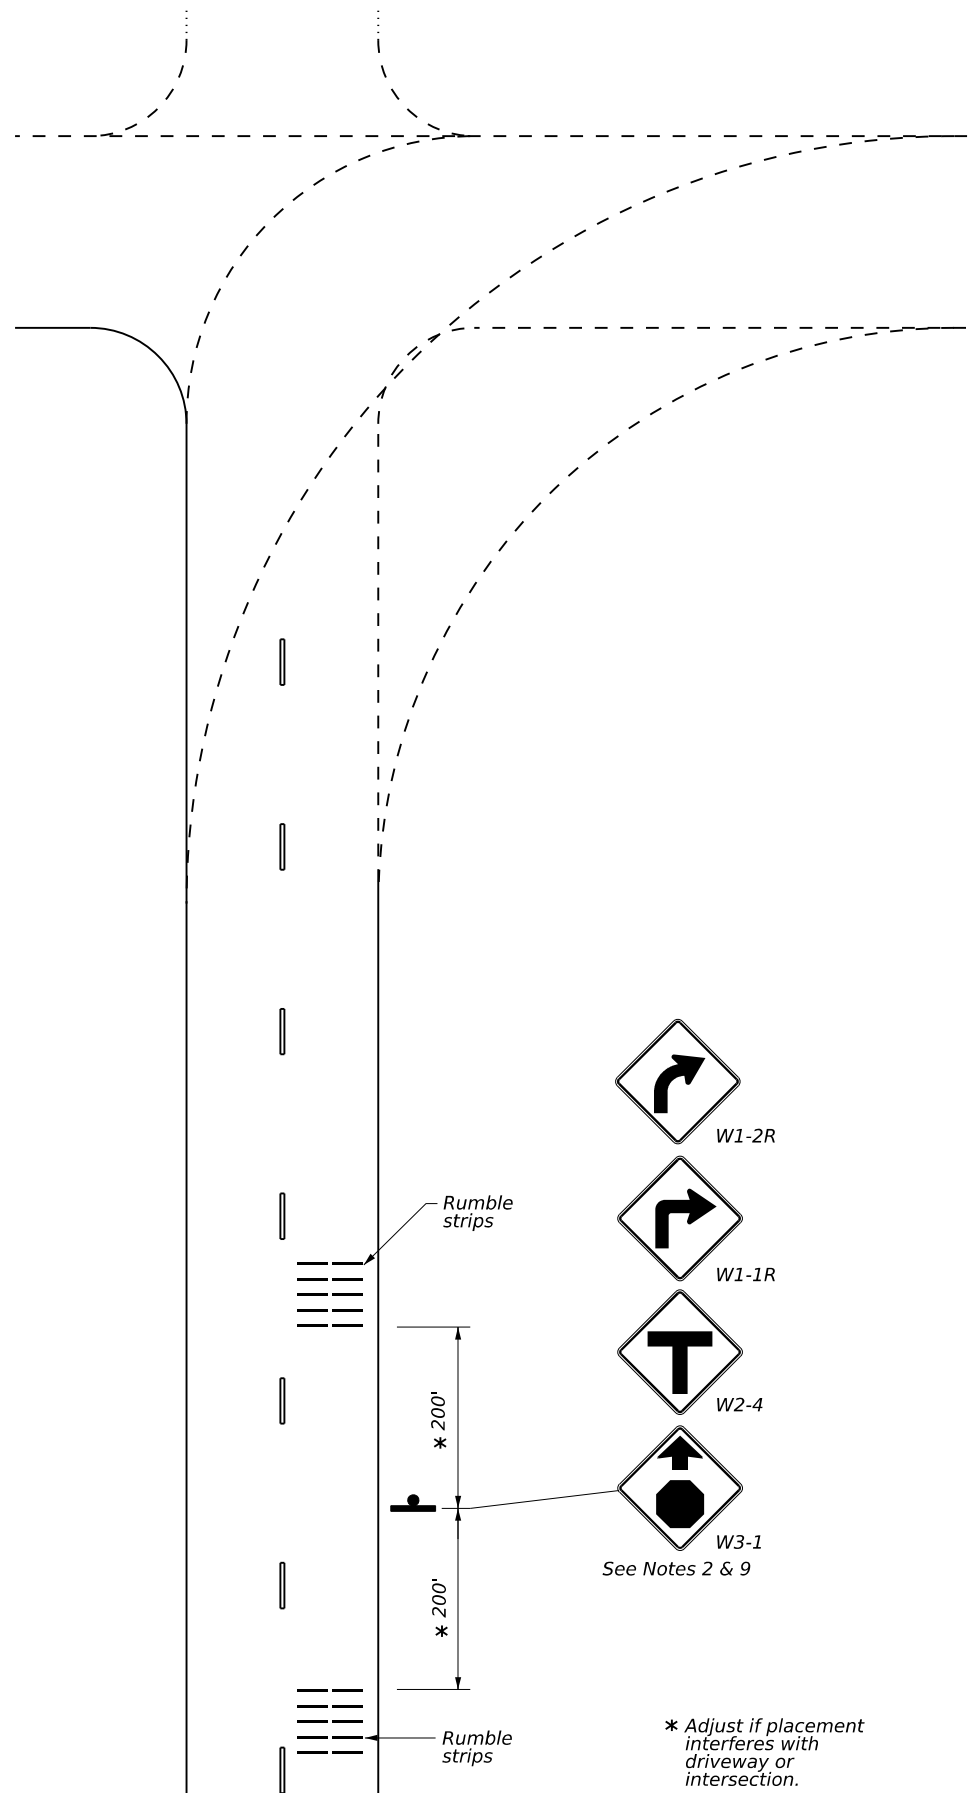


* Adjust if placement interferes with driveway or intersection.




PROFILE VIEW

RUMBLE STRIP STANDARD PATTERN

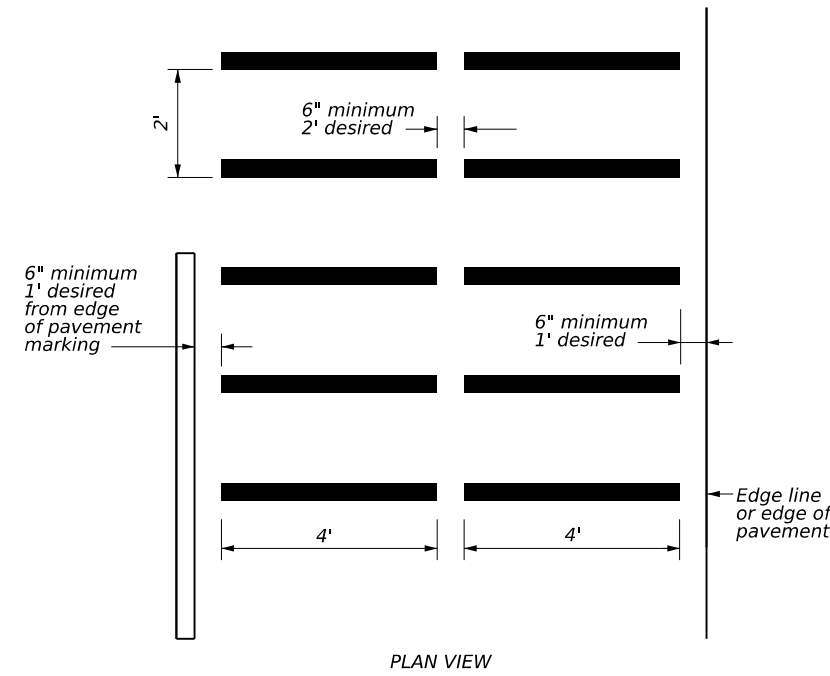

PLAN VIEW

RUMBLE STRIP ALTERNATIVE PATTERN

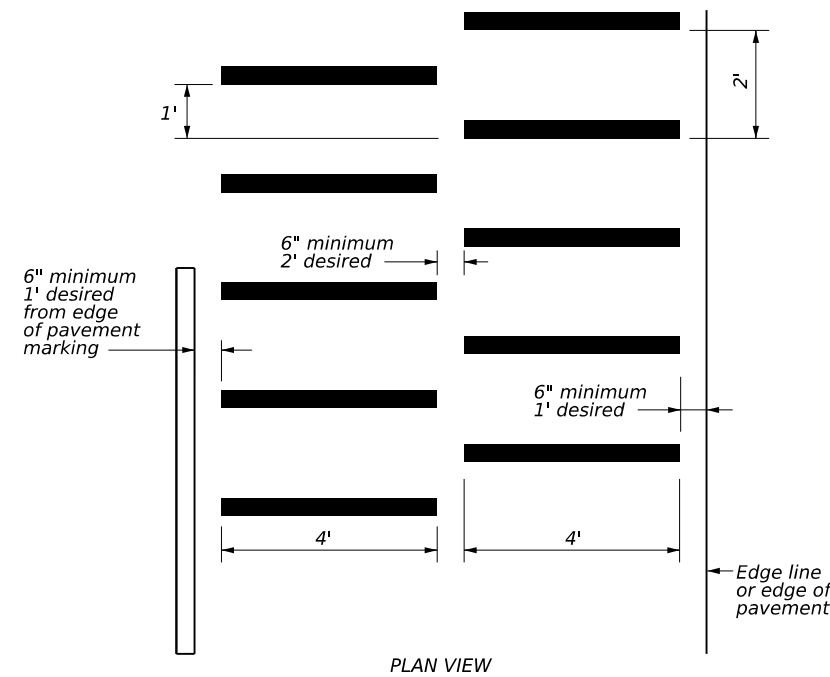

PLAN VIEW

GENERAL NOTES

1. Transverse or in-lane rumble strips should only be used at high incident and special geometric locations. These special geometric locations may include: approaches to rural, high speed signalized or stop-controlled intersections with sight restrictions and/or high crash rates, approaches to unexpected urban intersections, approaches to newly installed stop or signalized controlled intersections, approaches to toll plazas, approaches to hazardous horizontal curves, and approaches to railroad grade crossings.
2. When used, the rumble strips shall be placed 200 feet upstream and downstream of the warning sign.
3. The use of rumble strips should not be widespread or indiscriminate.
4. Preformed black raised rumble strips should be used. They should be installed in accordance with the manufacturer's recommendations.
5. Please reference the TxDOT Material Producers List for approved rumble strips (transverse): <http://www.txdot.gov/>
6. Consideration should be given to noise levels when in-lane or transverse rumble strips are to be installed near residential areas, schools, churches, etc.
7. The RUMBLE STRIPS AHEAD (W17-2T) sign may be used in advance of in-lane or transverse rumble strips, based on engineering judgement. This sign is typically not necessary for rumble strip installations built to the guidelines on this standard sheet. When used, this sign should be spaced in advance of the rumble strips based on the Guidelines for Advance Placement of Warning Signs table of the Texas Manual on Uniform Traffic Control Devices.
8. Consideration shall be given to bicyclists. See RS(6).
9. Other signs can be used as conditions warrant.



W17-2T

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023 8:31:56 AM
FILE: \\c:\programdata\stmcantaha\bbalik\at057704\rs(5)-23.dgn

				Texas Department of Transportation		Traffic Safety Division Standard			
<h2>TRANSVERSE OR IN-LANE RUMBLE STRIPS</h2> <h3>RS(5)-23</h3>									
FILE:	rs(5)-23.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	January 2023	CONT	0833	SECT	01	JOB	009, etc.	HIGHWAY	FM 217, etc
REVISIONS		DIST		COUNTY		SHEET NO.			
4-06	1-12	WACO		Coryell, etc				58	
2-10									
10-13									

DATE: 7/6/2023 8:32:00 AM
 FILE: c:\txdot\pw_online\txdot3\mogtaba_babiker\0577044\wzrs22.dgn

Warning sign and rumble strip sequence in opposite direction is same as below.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Rumble Strip Array (See note 1)


Rumble Strip Array (See note 1)

The second Rumble Strip Array is required when the ADT thresholds in Table 1 indicate the need for 2 Arrays.

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

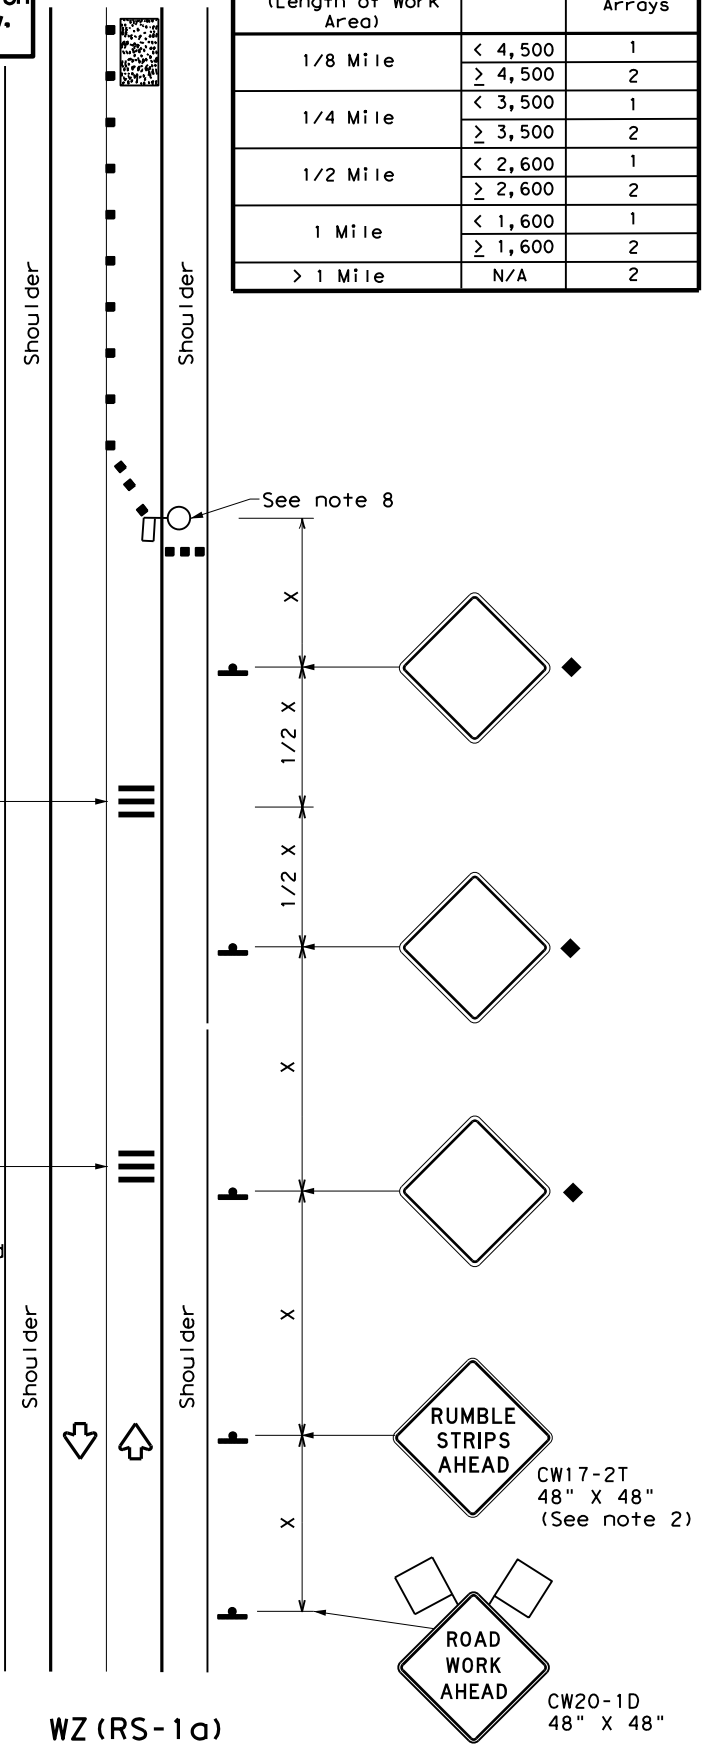

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

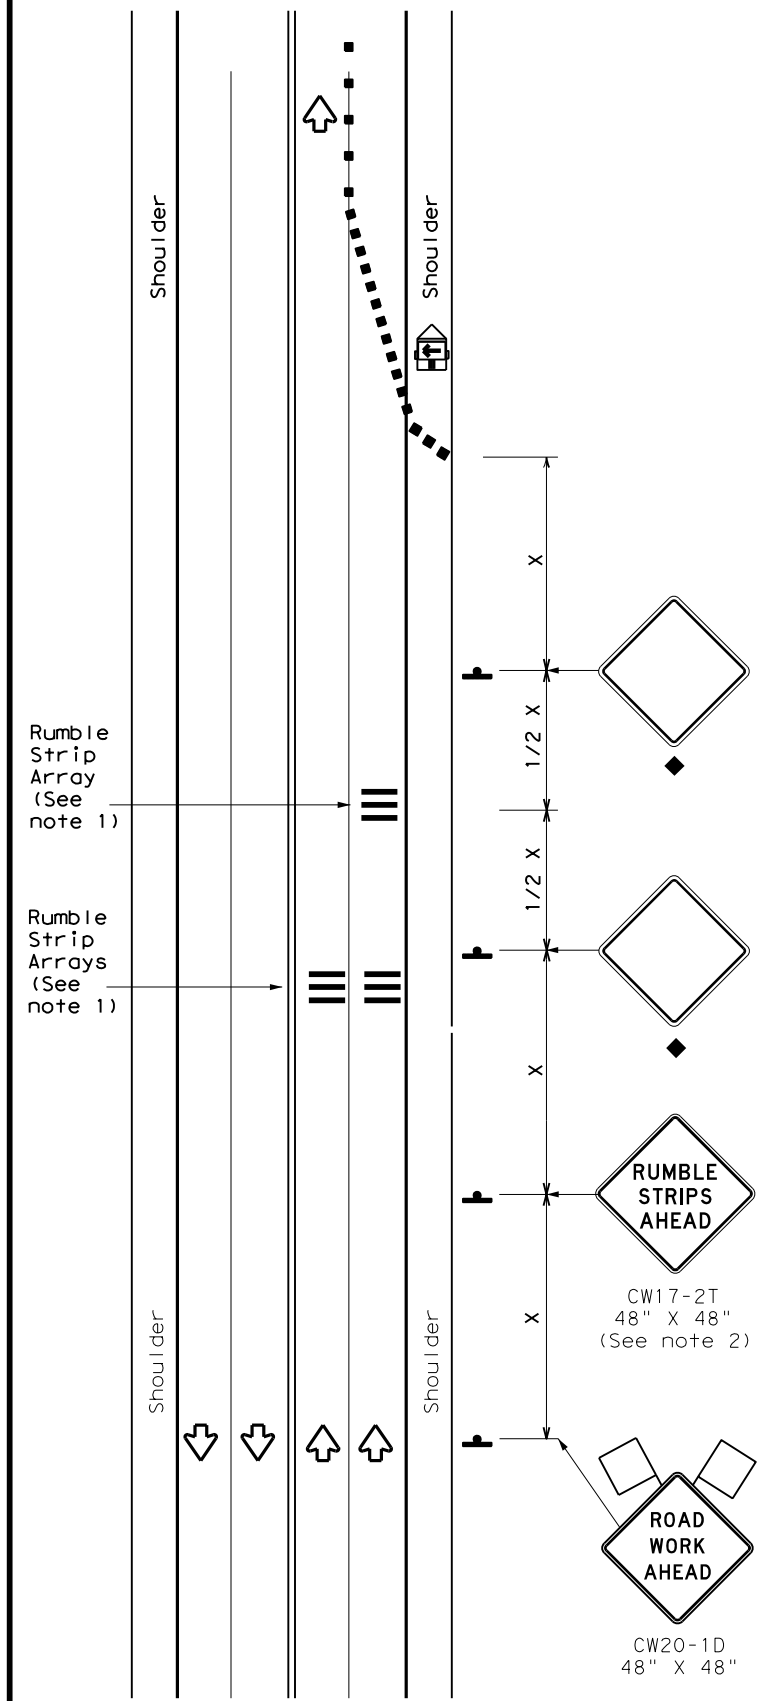

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35' +

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS/60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT)
 S=Posted Speed (MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.
 * For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

Texas Department of Transportation
 Traffic Safety Division Standard


TEMPORARY RUMBLE STRIPS

WZ (RS) - 22

FILE: wzrs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2012	CONT	SECT	JOB	HIGHWAY
REVISIONS	0833	01	009, etc.	FM 217, etc
2-14 1-22	DIST	COUNTY	SHEET NO.	
4-16	WACO	Coryell, etc	59	


70672023
 c:\ttdot\pw_online\ttdot3\mogtaba_babiker\d0577044\ec116.dgn

DISCLAIMER:
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

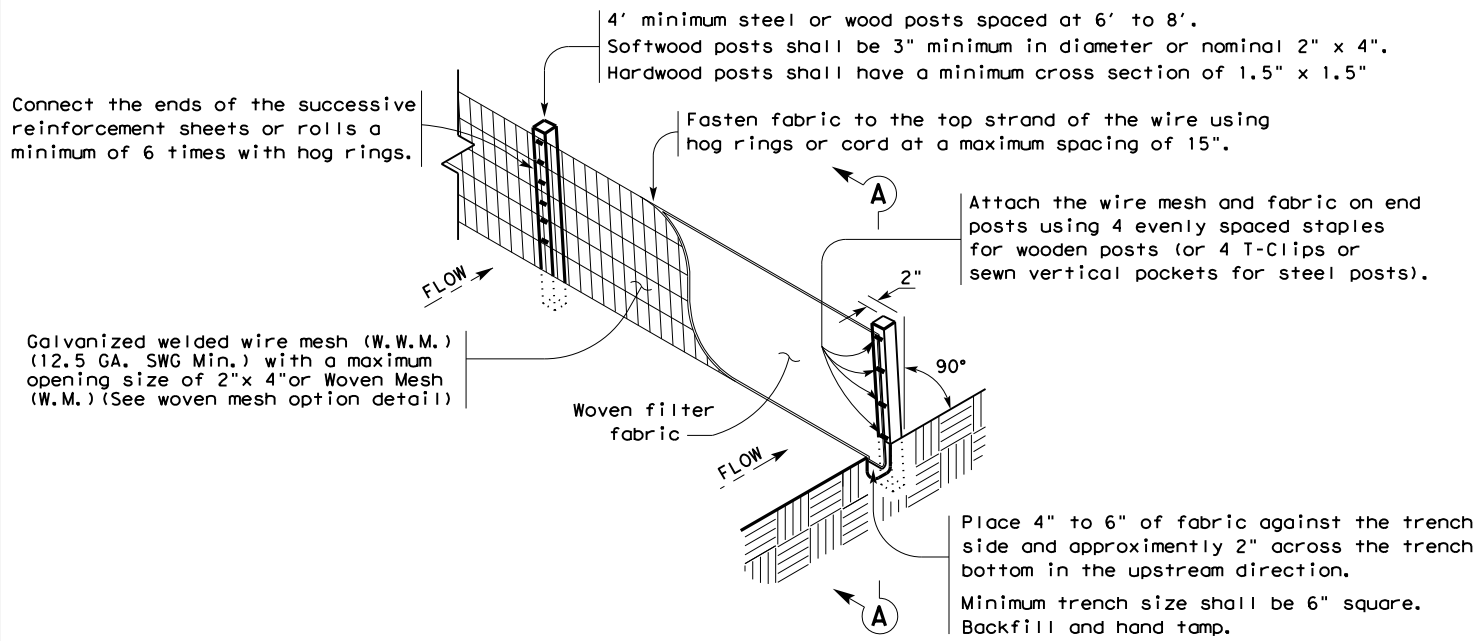

TEMPORARY SEDIMENT CONTROL FENCE

SCF

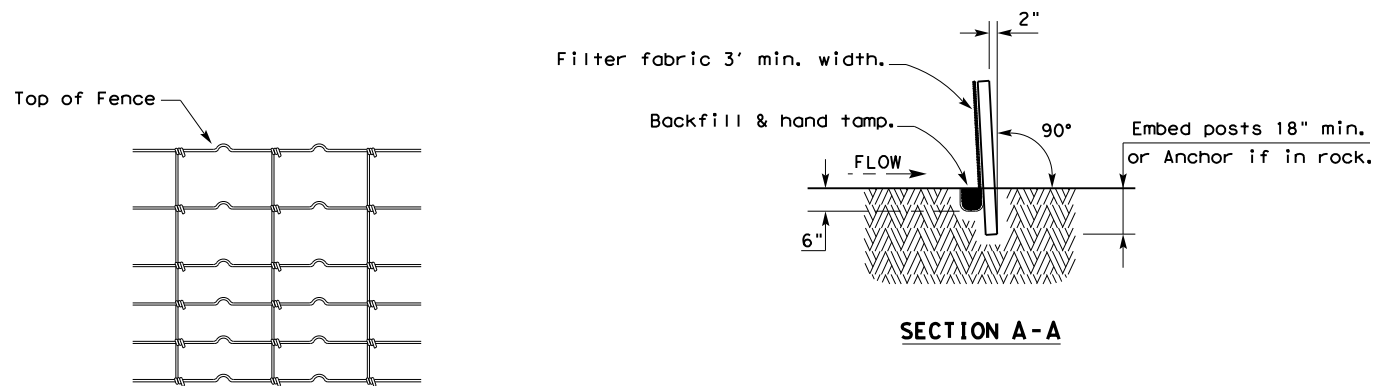

HINGE JOINT KNOT WOVEN MESH (OPTION) DETAIL

Galvanized hinge joint knot woven mesh (12.5 GA. SWG Min.) requires a minimum of five horizontal wires spaced at a maximum of 12 inches apart and all vertical wires spaced at a maximum of 12 inches apart.

SEDIMENT CONTROL FENCE USAGE GUIDELINES

A sediment control fence may be constructed near the downstream perimeter of a disturbed area along a contour to intercept sediment from overland runoff. A 2 year storm frequency may be used to calculate the flow rate to be filtered.

Sediment control fence should be sized to filter a maximum flow through rate of 100 GPM/FT². Sediment control fence is not recommended to control erosion from a drainage area larger than 2 acres.


LEGEND

Sediment Control Fence

SCF

GENERAL NOTES

1. Vertical tracking is required on projects where soil distributing activities have occurred unless otherwise approved.
2. Perform vertical tracking on slopes to temporarily stabilize soil.
3. Provide equipment with a track undercarriage capable of producing linear soil impressions measuring a minimum of 12" in length by 2" to 4" in width by 1/2" to 2" in depth.
4. Do not exceed 12" between track impressions.
5. Install continuous linear track impressions where the minimum 12" length impressions are perpendicular to the slope or direction of water flow.

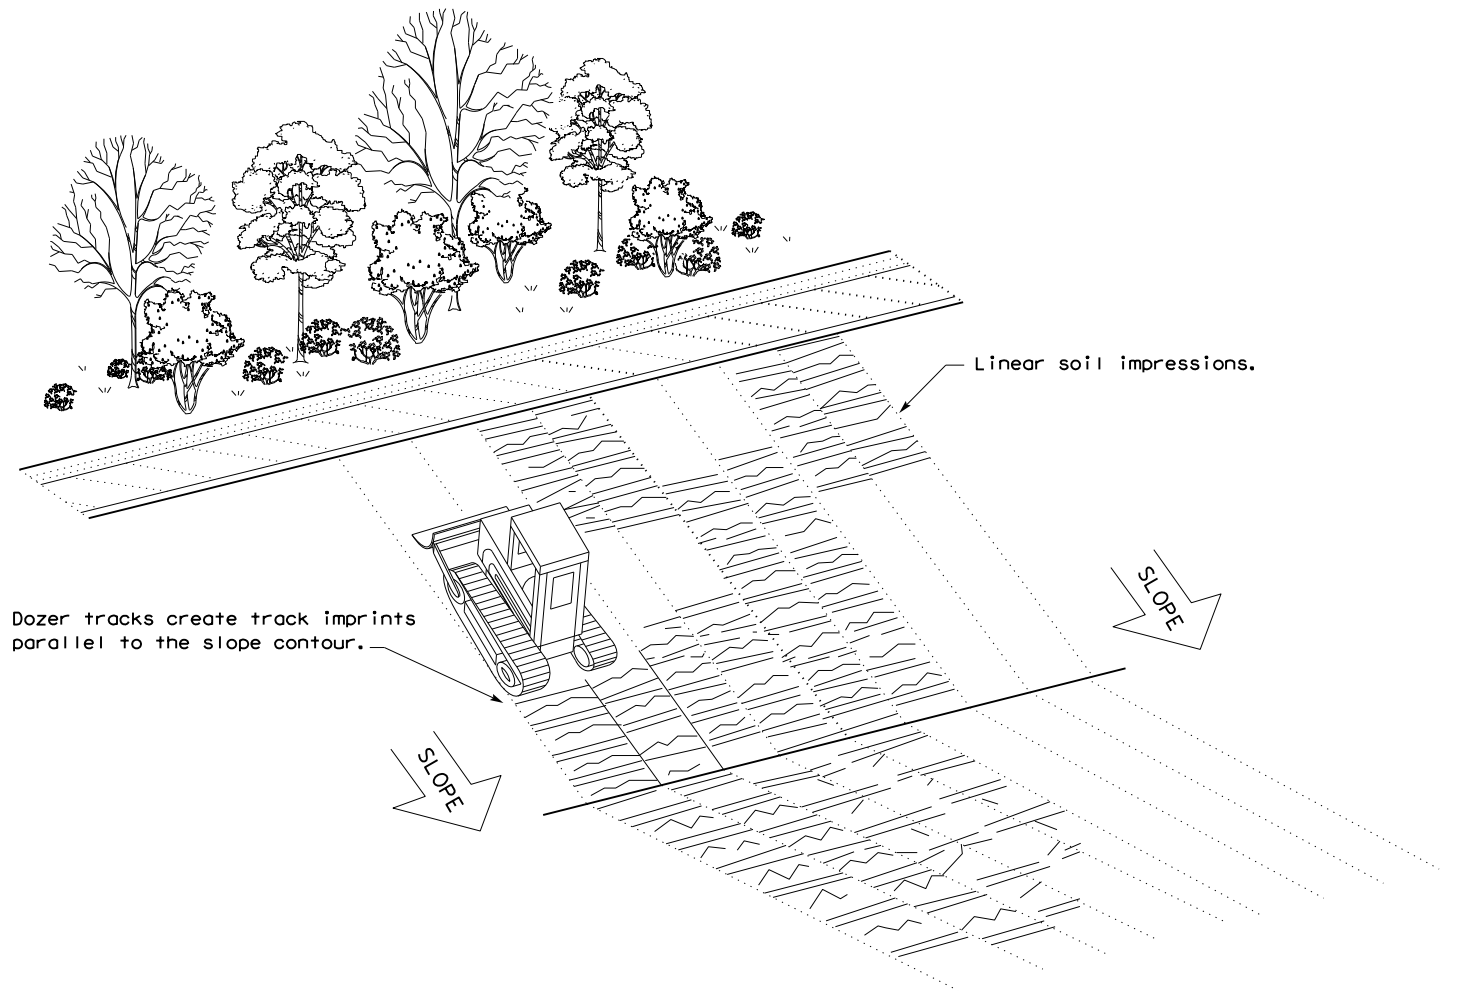

VERTICAL TRACKING

				Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES FENCE & VERTICAL TRACKING EC(1)-16					
FILE: ec116	DN: TxDOT	CK: KM	DW: VP	DN/CK: LS	
© TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY	
REVISIONS	0833	01	009, etc.	FM 217, etc	
	DIST	COUNTY		SHEET NO.	
	WACO	Coryell, etc		60	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 7/6/2023
 FILE: c:\txdot\p_w_online\txdot3\mogtaba.babiker\d0534899\epic.dgn

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

1.
2.
- No Action Required Required Action

Action No.

- Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
- Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
- Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
- When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP# _____

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

1.
2.
3.
4.

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input type="checkbox"/> Blankets/Matting	<input type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required Required Action

Action No.

1. See Statement Above

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required Required Action

Action No.

1. See Statement Above

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

- No Action Required Required Action

Action No.

1. See Statement Below

If any wildlife species are threatend by construction activities, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used. Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- Dead or distressed vegetation (not identified as normal)
- Trash piles, drums, canister, barrels, etc.
- Undesirable smells or odors
- Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required Required Action

Action No.

1.
2.
3.


VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

- No Action Required Required Action

Action No.

- 1.

 Texas Department of Transportation		Design Division Standard
<h2>ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS EPIC</h2>		
FILE: epic.dgn	DNR TxDOT	CR: RG DNR: VP CR: AR
©TxDOT: February 2015	CONT SECT	JOB HIGHWAY
12-12-2011 (DS) REVISIONS	0833 01	009, etc. FM 217, etc
09-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY SHEET NO.
01-23-2015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	WACO	Coryell, etc 61