

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT


FEDERAL AID PROJECT NUMBER
BR 2020(730)
CSJ 0914-05-137

NET LENGTH OF PROJECT = 255.00 FEET = 0.048 MILES
 ROADWAY = 169.00 FEET = 0.032 MILES
 BRIDGE = 86.00 FEET = 0.016 MILES

WILLIAMSON COUNTY CR 126

FROM: ON CR 126 AT MILEHAM BRIDGE
TO: STR# 14-246-0-AA04-87-001

FOR THE CONSTRUCTION OF BRIDGE MAINTENANCE
CONSISTING OF REMOVE BRIDGE AND APPROACHES

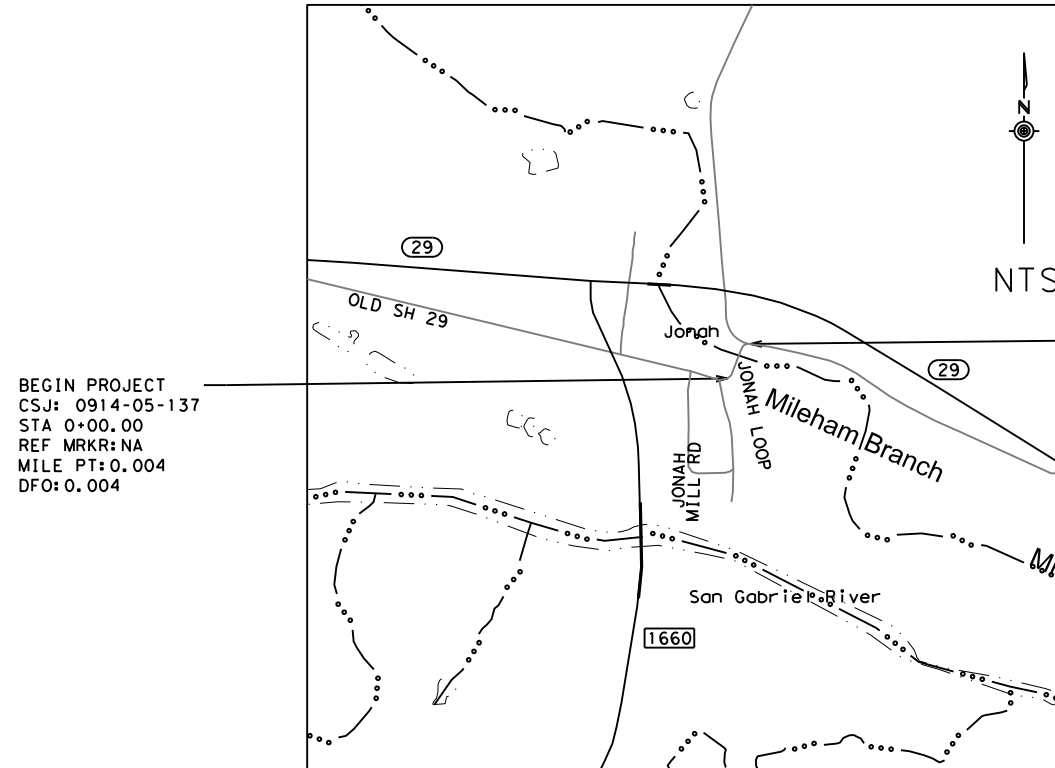

BEGIN PROJECT
CSJ: 0914-05-137
STA 0+00.00
REF MRKR: NA
MILE PT: 0.004
DFO: 0.004

END PROJECT
CSJ: 0914-05-137
STA 2+55.00
REF MRKR: NA
MILE PT: 0.004
DFO: 0.004

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSINGS: NONE



CONT	SECT	JOB	HIGHWAY
0914	05	137	CR 126
DIST	COUNTY		SHEET NO.
AUS	WILLIAMSON		1

DESIGN SPEED

MAIN LANES: N/A

A. D. T.

2010: 100 VPD
2024: 0 VPD

FINAL PLANS

DATE OF LETTING: _____
 DATE WORK BEGAN: _____
 DATE WORK COMPLETED AND ACCEPTED: _____
 FINAL CONTRACT COST: \$ _____
 CONTRACTOR: _____
 LIST OF APPROVED CHANGE ORDERS:

I CERTIFY THAT THIS PROJECT
WAS CONSTRUCTED IN SUBSTANTIAL
COMPLIANCE WITH THE FINAL AS-BUILT
PLANS AND SPECIFICATIONS.

P. E. DATE

RECOMMENDED FOR LETTING: 11/27/2023

DocuSigned by:
Susana Ceballos P.E.
E1816167B5C7414...
DISTRICT DESIGN ENGINEER

SUBMITTED FOR LETTING: 11/27/2023

DocuSigned by:
J.C.P., P.E.
089654558998492...
AREA ENGINEER

APPROVED FOR LETTING: 11/27/2023

DocuSigned by:
Heather Ashley-Nguyen
8912AF18F45A416...
DIRECTOR OF TRANSPORTATION
PLANNING & DEVELOPMENT

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION ON NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT: REQUIRED CONTRACT PROVISIONS FOR ALL FEDERAL-AID CONSTRUCTION CONTRACTS (FORM FHWA 1273, OCTOBER 23, 2023).

FILE: pw:/txdot/projectwiseonline.com/TxDOT4/Documents/14 - AUS/Design Projects/091405137/4 - Design/Plan Set/1. General/CR0126*GEN*TITLE.dgn DATE: 10/16/2023 5:11:28 PM

DATE: 10/6/2023 5:18:50 PM
 FILE: pw://txdot.projectwiseonline.com:txdot14/Documents/14 - AUS/Design Projects/091405137/4 - Design/Plan Set/1. General/CR0126_GEN_INDEX.dgn

	<u>GENERAL</u>
1	TITLE SHEET
2	INDEX OF SHEETS
3, 3A - 3D	GENERAL NOTES
4	ESTIMATE & QUANTITY
5	QUANTITY SUMMARY
	<u>TRAFFIC CONTROL PLAN</u>
6	SEQUENCE OF WORK LAYOUT
	<u>TRAFFIC CONTROL PLAN STANDARDS</u>
** 7	BC (1) -21
** 8	BC (2) -21
** 9	BC (3) -21
** 10	BC (4) -21
** 11	BC (5) -21
** 12	BC (6) -21
** 13	BC (7) -21
** 14	BC (8) -21
** 15	BC (9) -21
** 16	BC (10) -21
** 17	BC (11) -21
** 18	BC (12) -21
** 19	WZ (STPM) -23
** 20	WZ (RCD) -13
	<u>ROADWAY DETAILS</u>
21	REMOVAL PLAN LAYOUT
	<u>BRIDGE DETAILS</u>
22	BRIDGE DEMOLITION LAYOUT
	<u>BRIDGE STANDARDS</u>
** 23	SRR - 1 OF 2
** 24	SRR - 2 OF 2
	<u>DRAINAGE DETAILS</u>
25	EXTERNAL DRAINAGE AREA MAP AND HYDROLOGY SHEET
26-27	HYDRAULIC DATA SHEET
	<u>SIGNING</u>
28	SUMMARY OF SMALL SIGNS
29	SIGNING AND STRIPING LAYOUT
	<u>SIGNING STANDARDS</u>
** 30	TSR (3) -13
** 31	TSR (4) -13
** 32	SMD (GEN) -08
** 33	SMD (SLIP-1) -08
** 34	SMD (SLIP-2) -08
** 35	SMD (SLIP-3) -08
** 36	SMD (FRP) -08
	<u>PAVEMENT MARKINGS & DELINEATION STANDARDS</u>
** 37	PM (1) -22
** 38	D&OM (1) -20
** 39	D&OM (2) -20
** 40	D&OM (3) -20
** 41	D&OM (4) -20
	<u>ENVIRONMENTAL ISSUES</u>
42	ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS
43-44	STORMWATER POLLUTION PREVENTION PLAN (SWP3)
45	LAYOUT OF EROSION CONTROL MEASURES
	<u>ENVIRONMENTAL ISSUES STANDARDS</u>
** 46	EC (1) -16
** 47	EC (2) -16
** 48	EC (9) -16 - 1 OF 3
** 49	EC (9) -16 - 2 OF 3
** 50	EC (9) -16 - 3 OF 3

THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE WITH A ** HAVE BEEN SELECTED BY ME OR UNDER MY SUPERVISION AND ARE APPLICABLE TO THIS PROJECT.



DocuSigned by:
Amro Gaber
 DAD0168DA9D443D...

Austin District Central Design				
 Texas Department of Transportation				
CR 126 AT MILEHAM BR INDEX OF SHEETS				
SHEET 1 OF 1				
© 2023	CONT	SECT	JOB	HIGHWAY
DS:	CK:	0914 05	137	CR 126
DW:	CK:	DIST	COUNTY	SHEET NO.
		AUS	WILLIAMSON	2

003 GENERAL NOTES: Version: September 8, 2023

GENERAL

Contractor questions and requests for documents on this project are to be addressed to the following individual(s):

Georgetown Jason.Hudson@txdot.gov
Georgetown John.Peters@txdot.gov

Questions and requests for documents will be accepted via the Letting Pre-Bid Q&A web page. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:
<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

References to manufacturer's trade name or catalog numbers are for the purpose of identification only. Similar materials from other manufacturers are permitted if they are of equal quality, comply with the specifications for this project, and are approved.

If work is performed at Contractor's option, when inclement weather is impending, and the work is damaged by subsequent precipitation, the Contractor is responsible for all costs associated with replacing the work, if required.

Equip all construction equipment used in roadway work with highly visible omnidirectional flashing warning lights.

Provide a smooth, clean sawcut along the existing asphalt or concrete pavement structure, as directed. Consider subsidiary to the pertinent Items.

Keep the roadway free of debris and sediment caused by construction activities. Dispose of all material in accordance with federal, state, and local regulations. This work is subsidiary.

Damage to existing pipes and SET's due to Contractor operations will be repaired at Contractor's expense.

All locations used for storing construction equipment, materials, and stockpiles of any type, within the right of way, will be as directed. Use of right of way for these purposes will be restricted to those locations where driver sight distance to businesses and side street intersections is not obstructed and at other locations where an unsightly appearance will not exist. The Contractor will not have exclusive use of right of way but will cooperate in the use of the right of way with the city/county and various public utility companies as required.

Bridge Vertical Clearance and Traffic Handling.

Notify TxDOT project staff and the local bridge engineer 10 business days prior to the following: change in vertical clearance, placing beams/girders over traffic, opening or removing traffic from a bridge or portion of a bridge, and completion of bridge work. This requirement includes bridge class culverts. Provide vertical clearance for all structures (including signal mast arms, span wires, and overhead sign bridge structures) within the project limit. Submit information and notices to local bridge engineer at AUS_BRG_Notify@txdot.gov.

ITEM 5 – CONTROL OF THE WORK

Electronic Shop Drawing Submittals.

Submit electronic shop drawing submittals according to the current [Guide to Electronic Shop Drawing Submittal](#), <https://www.txdot.gov/business/resources/highway/bridge/shop-drawing-submittal-cycle.html>. Pre-approved producers can be found online at <https://www.txdot.gov/business/resources/materials/material-producer-list.html>. Use the following contact list for all submittals that are not required to be sent to Bridge Division and to copy the Engineer for all submittals to the Bridge Division.

Submittal Contact List

Georgetown Jason.Hudson@txdot.gov AUS_GE-ShopReview@txdot.gov

ITEM 6 - CONTROL OF MATERIALS

For Federally Funded Contracts, comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, by submitting an original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product. Refer to the Buy America Material Classification Sheet, located at the following link, for clarification on material categorization. [Buy America material classification sheet \(txdot.gov\)](#)

ITEM 7 – LEGAL RELATIONS AND RESPONSIBILITIES

No significant traffic generator events identified.

Work within a USACE Jurisdictional Area.

Do not initiate activities within a U.S. Army Corps of Engineers (USACE) jurisdictional area that have not been previously evaluated by the USACE as part of the permit review of this project. Such activities include, but are not limited to, haul roads, equipment staging areas, borrow and disposal sites. Obtain written approval from the Engineer for activities not specifically addressed in the plans. Provide a signed sketch and description of the location 60 business days prior to begin work at the location. Complete and return any forms provided by TxDOT. Approval of the work is not guaranteed. Un approved work is not a compensable impact.

Work over or near Bodies of Water (lakes, rivers, ponds, creeks, dry waterways, etc.).

Keep on site a universal spill kit adequate for the body of water and the work being performed. Debris is not allowed to fall into the ordinary high-water level (OHWL). Debris that falls into the OHWL must be removed at the end of each work day. Debris that falls into the floodway must be removed at the end of each work week or prior to a rain event. Install and maintain traffic

control devices to maintain a navigable corridor for water traffic, except during bridge demo and beam placement. This work is subsidiary.

Obtain written approval from the Engineer for temporary fill or crossings not specifically addressed in the plans. Provide a signed sketch of the location 60 business days prior to begin work at the location. Complete and return any forms provided by TxDOT. Approval of the work is not guaranteed. Unapproved work is not a compensable impact.

DSHS Asbestos and Demolition Notification.

Complete and provide the Texas Department of State Health Services (DSHS) notification form to the Engineer and email to AUS_BRG_Notify@txdot.gov at least 30 calendar days prior to bridge removal or renovation for each phase or step of work. Notify the Engineer via email of any changes to the work start and end dates.

Migratory Birds and Bats.

Migratory birds and bats may be nesting within the project limits and concentrated on roadway structures such as bridges and culverts. Remove all old and unoccupied migratory bird nests from any structures, trees, etc. between September 16 and February 28. Prevent migratory birds from re-nesting between March 1 and September 15. Prevention shall include all areas within 25 ft. of proposed work. All methods used for the removal of old nesting areas and the prevention of re-nesting must be submitted to TxDOT 30 business days prior to begin work. This work is subsidiary.

If active nests are encountered on-site during construction, all construction activity within 25 ft. of the nest must stop. Contact the Engineer to determine how to proceed.

Tree and Brush Trimming and Removal.

Work will be conducted September 16 thru February 28. Work conducted outside this timeframe will require a bird survey. Submit a survey request to TxDOT 30 business days prior to begin work.

If within the removal time period, removal work may be conducted during delayed start period using proper traffic control per TCP standards.

Upon begin removal operations, all removal work for the project must be completed within 21 calendar days. Completion of removal includes removing from ROW or mulching of all debris.

No extension of time or compensation will be granted for a delay or suspension due to the above bird, bat, and tree/brush requirements.

Law Enforcement Personnel.

Submit charge summary and invoices using the Department forms.

Patrol vehicles must be clearly marked to correspond with the officer's agency and equipped with appropriate lights to identify them as law enforcement. For patrol vehicles not owned by a

law enforcement agency, markings will be retroreflective and legible from 100 ft. from both sides and the rear of the vehicle. Lights will be high intensity and visible from all angles.

No payment will be made for law enforcement personnel needed for moving equipment or payment for drive time to/from the event site. A minimum number of hours is not guaranteed. Payment is for work performed. If the Contractor has a field office, provide an office location for a supervisory officer when event requires a supervising officer. This work is subsidiary.

A maximum combined rate of \$70 per hour for the law enforcement personnel and the patrol vehicle will be allowed. Any scheduling fee is subsidiary per Standard Specification 502.4.2. Cancel law enforcement personnel when the event is canceled. Cancellation, minimums or "show up" fees will not be paid when cancellation is made 12 hours prior to beginning of the event. Failure to cancel within 12 hours will not be cause for payment for cancellation, minimums, or "show up" time. Payment of actual "show up" time to the event site due to cancellation will be on a case-by-case basis at a maximum of 2 hours per officer.

Alterations to the cancellation and maximum rate must be approved by the Engineer or pre-determined by official policy of the officers governing authority.

General Design and Construction BMP

- Contractors will be informed to avoid harming all wildlife species if encountered and allow them to safely leave the project site. Due diligence should be used to avoid killing or harming any wildlife species in the implementation of transportation projects.
- Apply hydromulching and/or hydroseeding in areas for soil stabilization and/or revegetation of disturbed areas around wetlands and in riparian areas.
- If erosion control blankets or mats will be used, the product should not contain netting, but should only contain loosely woven natural fiber netting in which the mesh design allows the threads to move, therefore allowing expansion of the mesh openings. Plastic netting should be avoided.
- Project staging areas, stockpiles, temporary construction easements, and other project related sites should be situated in previously disturbed areas to avoid or minimize impacts to sensitive or unique habitats including intact native vegetation, floodplains, riparian corridors, wetlands, playa lakes, and habitat for wildlife species.
- When lighting is added, consider wildlife impacts from light pollution and incorporating dark-sky practices into design strategies. Minimize sky glow by focusing light downward, with full cutoff luminaires to avoid light emitting above the horizontal. The minimum amount of night-time lighting needed for safety and security should be used.

Vegetation BMP

- Minimize the amount of vegetation cleared. Removal of native vegetation, particularly mature native trees and shrubs should be avoided. Impacted vegetation should be replaced with in-kind on-site replacement/restoration of native vegetation.
- To minimize adverse effects, activities should be planned to preserve mature trees, particularly acorn, nut or berry producing varieties. These types of vegetation have high value to wildlife as food and cover.

- It is strongly recommended that trees greater than 12 inches in diameter at breast height (DBH) that are removed be replaced. TPWD's experience indicates that for ecologically effective replacement, a ratio of three trees for every one (3:1) lost should be provided to either on-site or off-site. Trees less than 12 inches DBH should be replaced at a 1:1 ratio.
- Replacement trees should be of equal or better wildlife quality than those removed and be regionally adapted native species.
- When trees are planted, a maintenance plan that ensures at least an 85 percent survival rate after three years should be developed for the replacement trees.
- The use of any non-native vegetation in landscaping and revegetation is discouraged. Locally adapted native species should be used.
- The use of seed mix that contains seeds from only regional ecotype native species is recommended.

Invasive Species BMP

- Care should be taken to prevent the spread of aquatic and terrestrial invasive plants during construction activities. Educate contractors on how to identify common invasive plants and the importance of proper equipment cleaning, transport, and disposal of invasive plants in a manner and location that prevents spread when invasive plants are removed during construction.
- Colonization by invasive plants should be actively prevented on disturbed sites in terrestrial habitats. Vegetation management should include removing or chemically treating invasive species as soon as practical while allowing the existing native plants to revegetate the disturbed areas; repeated removal or treatment efforts may be needed. Only native or non-invasive plants should be planted. Care should be taken to avoid mowing invasive giant reed (*Arundo donax*), which spreads by fragmentation, and to clean equipment if inadvertently mowed to prevent spread. If using hay bales for sediment control, use locally grown weed-free hay to prevent the spread of invasive species. Leave the hay bales in place and allow them to break down, as this acts as mulch assisting in revegetation.

Water Quality BMP

- Minimize the use of equipment in streams and riparian areas during construction. When possible, equipment access should be from banks, bridge decks, or barges.
- When temporary stream crossings are unavoidable, remove stream crossings once they are no longer needed and stabilize banks and soils around the crossing.
- Rubbish found near bridges on TxDOT ROW should be removed and disposed of properly to minimize the risk of pollution. Rubbish does not include brush piles or snags.

Aquatic Amphibian and Reptile BMP

- Minimize impacts to wetlands, temporary and permanent open water features, including depressions, and riverine habitats.
- Maintain the existing hydrologic regime and any connections between wetlands and other aquatic features.
- Apply hydromulching and/or hydroseeding in areas for soil stabilization and/or revegetation of disturbed areas around wetlands and in riparian areas. If erosion control blankets or mats will be used, the product should not contain netting, but should only contain loosely woven natural fiber netting in which the mesh design allows the threads to move, therefore allowing expansion of the mesh openings. Plastic netting should be avoided.

- Project specific locations (PSLs) proposed within state-owned ROW should be located in uplands away from aquatic features.

ITEM 8 - PROSECUTION AND PROGRESS

Working days will be charged in accordance with 8.3.1.4, "Standard Workweek." No work on Saturdays or Sundays.

ITEM 100 - PREPARING RIGHT OF WAY

Prep ROW must not begin until accessible trees designated for preservation have been protected, items listed in the EPIC have been addressed, and SW3P controls installed in accessible areas.

Backfill material will be Type B Embankment using ordinary compaction.

Follow Item 752.4 Work Methods and Item 752 general notes when removing or working on or near trees and brush.

Unless shown otherwise in the plans or a designated non-mow area, perform trimming or removal for areas within 30 ft. of edge of pavement under construction. Trim or remove to provide minimum of 5 ft. of horizontal clearance and 7 ft. of vertical clearance for the following: sidewalks, paths, guard fence, rails, signs, object markers, and structures. Trim to provide a minimum of 14 ft. vertical clearance under all trees. This work is subsidiary.

ITEM 105 - REMOVING TREATED AND UNTREATED BASE AND ASPHALT PAVEMENT

Existing typical is based on information available. This typical may not account for all maintenance work such as overlays or pavement repairs. A change in material type or thickness does not warrant additional payment. Payment is full compensation for removing all material to the depth specified.

ITEM 160 - TOPSOIL

Off-site topsoil will have a minimum PI of 25.

No Sandy Loam allowed.

Obtain approval of the actual depth of the topsoil sources for both on-site and off-site sources.

Construct topsoil stockpiles of no more than five (5) feet in height.

It is permissible to use topsoil dikes for erosion control berms within the right of way, as directed.

Seed or track slopes within 14 days of placement.

Salvage topsoil from sites of excavation and embankment. Maximum salvage depth is 6 inches. Windrowing of topsoil obtained from the Right of Way (ROW) is not allowed.

ITEM 162 – SODDING FOR EROSION CONTROL

Provide common Bermuda. Provide St. Augustine if the adjacent grass is St. Augustine.

ITEM 164 – SEEDING FOR EROSION CONTROL

Hydro mulch seeding will be allowed as a substitute for drill seeding if placed October 1 thru January 31. It may only be substituted in areas with a slope less than 1 in. vertical to 12 in. horizontal. It may not be used in the bottom of a ditch or channel. Payment will be made using the existing drill seed item.

ITEM 168 – VEGETATIVE WATERING

Water all areas of project to be seeded or sodded.

Maintain the seedbed in a condition favorable for the growth of grass. Watering can be postponed immediately after a rainfall on the site of ½ inch or greater, but will be resumed before the soil dries out. Continue watering until final acceptance.

Vegetative watering rates and quantities are based on ¼ inch of watering per week over a 3-month watering cycle. The actual rates used and paid for will be as directed and will be based on prevailing weather conditions to maintain the seedbed.

Obtain water at a source that is metered (furnish a current certification of the meter being used) or furnish the manufacturer’s specifications showing the tank capacity for each truck used. Notify the Engineer, each day that watering takes place, before watering, so that meter readings or truck counts can be verified.

ITEM 169 – SOIL RETENTION BLANKETS

Type A blankets containing straw fibers are not allowed. Type B and D blankets shall be a spray type blanket.

ITEMS 420, 425, 441, & 462 - STRUCTURES

Bridge Vertical Clearance and Traffic Handling.

Notify TxDOT project staff and the local bridge engineer 10 business days prior to the following: change in vertical clearance, placing beams/girders over traffic, opening or removing traffic from a bridge or portion of a bridge, and completion of bridge work. This requirement includes bridge class culverts. Provide vertical clearance for all structures (including signal mast arms, span wires, and overhead sign bridge structures) within the project limit. Submit information and notices to local bridge engineer at AUS_BRG_Notify@txdot.gov

ITEM 496 - REMOVING STRUCTURES

Submit a demolition plan to the Engineer. Have the plan signed and sealed by a licensed professional engineer when the structure will continue to accommodate traffic after removal has begun and the removal impacts any part of the structure below the deck or riding surface. If applicable, the plan must detail requirements for meeting the U.S. Army Corps of Engineers’ Section 404 Permit. The demolition plan must detail handling of roadway and waterway traffic. Waterway traffic must be maintained at all times unless a closure is approved by the Engineer. –

No debris is allowed to fall into a body of water. Debris that falls into the water must be removed at the end of each work day. Debris that falls into the floodway must be removed at the end of each work week or prior to a rain event.

No debris is allowed to fall directly onto existing pavement. Existing pavement must be protected from damage by debris with a minimum of 1 ft. sand cushion. Submit an alternate roadway protection or cushion material to Engineer for approval. If existing pavement is PFC, use a vacuum truck to remove embedded sand after removal of sand cushion and debris. This work is subsidiary.

No blasting/explosives will be allowed to for structure demolition.

ITEM 502 - BARRICADES, SIGNS, AND TRAFFIC HANDLING

Table 1

Roadway	Limits	Allowable Closure Time
IH 35	All (1 lane closed)	9 P to 5 A
IH 35	All (2 lanes closed, see allowable work below)	9 P to 5 A
IH 35	All (2 lanes closed, all work)	11 P to 5 A
SH 45	US 183 to SH130	8 P to 5 A
LP 1	William Cannon to Parmer Lane	8 P to 5 A
US 183	SH 29 to FM 1327	8 P to 5 A
SH 71	SH 130 to IH 35	8 P to 5 A
SH 71	SH 304 to Tahitian Drive	8 P to 5 A
SH 71	US 290 W to RM 3238	8 P to 5 A
US 290 W	IH 35 to Nutty Brown Rd	8 P to 5 A
US 290 E	IH 35 to SH 95	8 P to 5 A
FM 734	FM 1431 to US 290 E	8 P to 5 A
US 79	IH 35 to Bus 79 in Taylor	8 P to 5 A
RM 1431	Lohmans Ford Rd to IH 35	8 P to 5 A
SH 29	LP 332 western terminus to SH 130	8 P to 5 A
SH 80	Charles Austin to River Road	8 P to 5 A
RM 2222	All	8 P to 5 A
RM 620	All	8 P to 5 A
RM 2244	All	8 P to 5 A
SPUR 69	All	8 P to 5 A
LP 360	All	8 P to 5 A
LP 343	All	8 P to 5 A
LP 275	All	8 P to 5 A
FM 1325	All	8 P to 5 A
All	Within 200’ of a signalized intersection	9 P to 5 A
All	All (Full Closure, see allowable work below)	11 P to 4 A

For all roadways: Submit request for traffic detours and full roadway closures 168 hours prior to implementation. Submit request for nighttime work 96 hours to implementation date.

Cover, relocate, or remove existing small, large, and overhead signs that conflict with traffic control. Cover large and overhead signs to remain using latest standard TS-CD. This work is subsidiary.

Install all permanent signs, delineation, and object markers required for the operation of the surrounding roadways. Use of temporary mounts is allowed or may be required until the permanent mounts are installed or not impacted by construction. Maintain the temporary mounts. This work is subsidiary.

Place a 28-inch cone, meeting requirements of BC (10) and Ty III barricades, on top of foundations that have protruding studs. This work is subsidiary.

Vertical panels used on roadways with speed limit 55mph or greater must be round in shape or have a self-righting mechanism. The “flat” or “oblong” shaped vertical panels are not allowed.

Edge condition treatment types must be in accordance with the TxDOT standard. Installation and removal of a safety slope is subsidiary.

The Contractor Force Account “Safety Contingency” that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor’s Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

ITEM 506 - TEMPORARY EROSION, SEDIMENTATION, AND ENV CONTROLS

If SW3P plan sheets are not provided, place the control measures as directed.

Install, maintain, remove control measures in areas of the right of way utilized by the Contractor that are outside the limits of disturbance required for construction. Permanently stabilize the area. This work is subsidiary.

Erosion control measures must be initiated immediately in areas where construction activities have ceased and will not resume for a period exceeding 14 calendar days. Vertical track all exposed soil, stockpiles, and slopes. Re-track after each rain event or every 14 days, whichever occurs first. Sheep foot roller is allowed for vertical tracking. This work is subsidiary.

Unless a specific pay item is provided in the plans, the installation of the 6:1 or flatter for RFD side slopes in the safety zone will be subsidiary to pertinent bid items.

For edge line rumble strips: Use Option 1 for shoulder width equal to or less than 2 ft. Use Option 3 for shoulder width greater than 2 ft. but less than 4 ft. Use Option 4 for shoulder width equal to or greater than 4 ft.

ITEM 644 – SMALL ROADSIDE SIGN ASSEMBLIES

Triangular slip base must be the clamp style to secure the post to the slip base. Set screw style slip base will not be allowed.

ITEM 752 – TREE AND BRUSH REMOVAL

Follow Item 752.4 Work Methods and Item 752 general notes when removing or working on or near trees and brush even if Item 752 is not included as a pay item.

Flailing equipment is not allowed. Burning brush is not allowed in urban areas or on ROW. Use hand methods or other means of removal if doing work by mechanical methods is impractical. Prior to begin tree pruning, send email confirmation to the Engineer that training and demonstration of work methods has been provided to the employees. This work is subsidiary.

Shredded vegetation may be blended, at a rate not to exceed 15 percent by volume, with Item 160 if the maximum dimension is not greater than 2 in.

ITEM 6001 – PORTABLE CHANGEABLE MESSAGE SIGN

Provide 2 PCMS. Provide a replacement within 12 hours. PCMS will be available for traffic control, event notices, roadway conditions, service announcements, etc.

Place PCMS 10 calendar days prior to begin work stating “Road Work Begin Soon, Contact 832-7000 For Info”.

Place PCMS at time of LCN request. Place the PCMS at the expected end of queue caused by the closure. When the closure is active, revise the message to reflect the actual condition during the closure, such as “RIGHT LN CLOSED XXX FT”.

ITEM 6185 – TRUCK MOUNTED ATTENUATOR AND TRAILER ATTENUATOR

The TMA/TA used for installation/removal of traffic control for a work area will be subsidiary to the TMA/TA used to perform the work.

The contractor will be responsible for determining if one or more operations will be ongoing at the same time to determine the total number of TMA/TA required for the work. TMA/TAs paid by the day is full compensation for all worksite locations during an entire day.

TMA/TAs used to protect damaged attenuators will be paid by the day using the force account item for the repair.



CONTROLLING PROJECT ID 0914-05-137

DISTRICT Austin
HIGHWAY CR 126

COUNTY Williamson

Estimate & Quantity Sheet

CONTROL SECTION JOB				0914-05-137		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00039894			
COUNTY				Williamson			
HIGHWAY				CR 126			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	100-6002	PREPARING ROW	STA	2.550		2.550	
	105-6035	REMOVING STAB BASE & ASPH PAV (0-2")	SY	540.000		540.000	
	106-6001	OBLITERATING ABANDONED ROAD	STA	2.130		2.130	
	160-6003	FURNISHING AND PLACING TOPSOIL (4")	SY	540.000		540.000	
	164-6035	DRILL SEEDING (PERM) (RURAL) (CLAY)	SY	540.000		540.000	
	168-6001	VEGETATIVE WATERING	MG	10.000		10.000	
	169-6001	SOIL RETENTION BLANKETS (CL 1) (TY A)	SY	540.000		540.000	
	432-6033	RIPRAP (STONE PROTECTION)(18 IN)	CY	112.000		112.000	
	496-6009	REMOV STR (BRIDGE 0 - 99 FT LENGTH)	EA	1.000		1.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	3.000		3.000	
	506-6002	ROCK FILTER DAMS (INSTALL) (TY 2)	LF	75.000		75.000	
	506-6011	ROCK FILTER DAMS (REMOVE)	LF	75.000		75.000	
	506-6038	TEMP SEDMT CONT FENCE (INSTALL)	LF	239.000		239.000	
	506-6039	TEMP SEDMT CONT FENCE (REMOVE)	LF	239.000		239.000	
	644-6001	IN SM RD SN SUP&AM TY10BWG(1)SA(P)	EA	5.000		5.000	
	644-6002	IN SM RD SN SUP&AM TY10BWG(1)SA(P-BM)	EA	2.000		2.000	
	644-6076	REMOVE SM RD SN SUP&AM	EA	2.000		2.000	
	658-6079	INSTL OM ASSM (OM-4)(TWT)WAP	EA	6.000		6.000	
	6001-6001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	60.000		60.000	
	6120-6001	DEAD END ROADWAY BARRICADE	LF	60.000		60.000	
	6185-6002	TMA (STATIONARY)	DAY	60.000		60.000	
18		SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	
		EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS	1.000		1.000	
		LAW ENFORCEMENT: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	

DATE: 10/27/2023 5:04:00 PM
 FILE: pw://twdot.projectwiseonline.com:txdot4/Documents/14 - AUS/Design Projects/091405137/4 - Design/Plan Set/1. General/CR0126_GEN_SUM.dgn

SUMMARY OF WORKZONE TRAFFIC CONTROL ITEMS			
LOCATION	6001	6185	
	6001	6002	
	PORTABLE CHANGEABLE MESSAGE SIGN	TMA (STATIONARY)	
	DAY	DAY	
SEQUENCE OF WORK LAYOUT	60	60	
PROJECT TOTALS	60	60	

SUMMARY OF REMOVAL ITEMS				
LOCATION	105	106	496	644
	6035	6001	6009	6076
	REMOVING STAB BASE & ASPH PAV (0-2")	OBLITERATING ABANDONED ROAD	REMOV STR (BRIDGE 0 - 99 FT LENGTH)	REMOVE SM RD SN SUP&AM
	SY	STA	EA	EA
REMOVAL LAYOUT	540	2.13	1	
SIGNING LAYOUT				2
PROJECT TOTALS	540	2.13	1	2


SUMMARY OF SIGNING ITEMS				
LOCATION	644	644	658	6120
	6001	6002	6079	6001
	IN SM RD SN SUP&AM TY10BWG (1) S A (P)	IN SM RD SN SUP&AM TY10BWG (1) S A (P-BM)	INSTR OM ASSM (OM-4) (TWT) WAP	DEAD END ROADWAY BARRICADE
	EA	EA	EA	LF
SIGNING LAYOUT	5	2	6	60
PROJECT TOTALS	5	2	6	60

SUMMARY OF EROSION CONTROL ITEMS									
LOCATION	160	164	168	169	432	506	506	506	506
	6003	6035	6001	6001	6033	6002	6011	6038	6039
	FURNISHING AND PLACING TOPSOIL (4")	DRILL SEEDING (PERM) (RURAL) (CLAY)	VEGETATIVE WATERING	SOIL RETENTION BLANKETS (CL 1) (TY A)	RIPRAP (STONE PROTECTION) (18 IN)	ROCK FILTER DAMS (INSTALL) (TY 2)	ROCK FILTER DAMS (REMOVE)	TEMP SEDMT CONT FENCE (INSTALL)	TEMP SEDMT CONT FENCE (REMOVE)
	SY	SY	MG	SY	CY	LF	LF	LF	LF
EROSION CONTROL LAYOUT	540	540	10	540	112	75	75	239	239
PROJECT TOTALS	540	540	10	540	112	75	75	239	239

SUMMARY OF MOBILIZATION ITEMS		
LOCATION	500	502
	6001	6001
	MOBILIZATION	BARRICADES, SIGNS AND TRAFFIC HANDLING
	LS	MO
	1.00	3.00
PROJECT TOTALS	1	3

SUMMARY OF ROADWAY ITEMS	
LOCATION	100
	6002
	PREPARING ROW
	STA
REMOVAL LAYOUT	2.55
PROJECT TOTALS	2.55

**Austin District
Central Design**




**CR 126 AT MILEHAM BR
QUANTITY SUMMARY**

SHEET 1 OF 1

© 2023	CONT	SECT	JOB	HIGHWAY
DS: CK:	0914	05	137	CR 126
DW: CK:	DIST COUNTY		SHEET NO.	
	AUS WILLIAMSON		5	

DATE: 9/26/2023 12:37:17 AM
 FILE: p:\t\dot\project\wiseonline.com\tx\0014\Documents\14 - AUS\Design Projects\091405137\4 - Design\Plan Set\2. TCP\CR0126. TCP_SOW_AND_DETOUR_LAYOUT.dgn

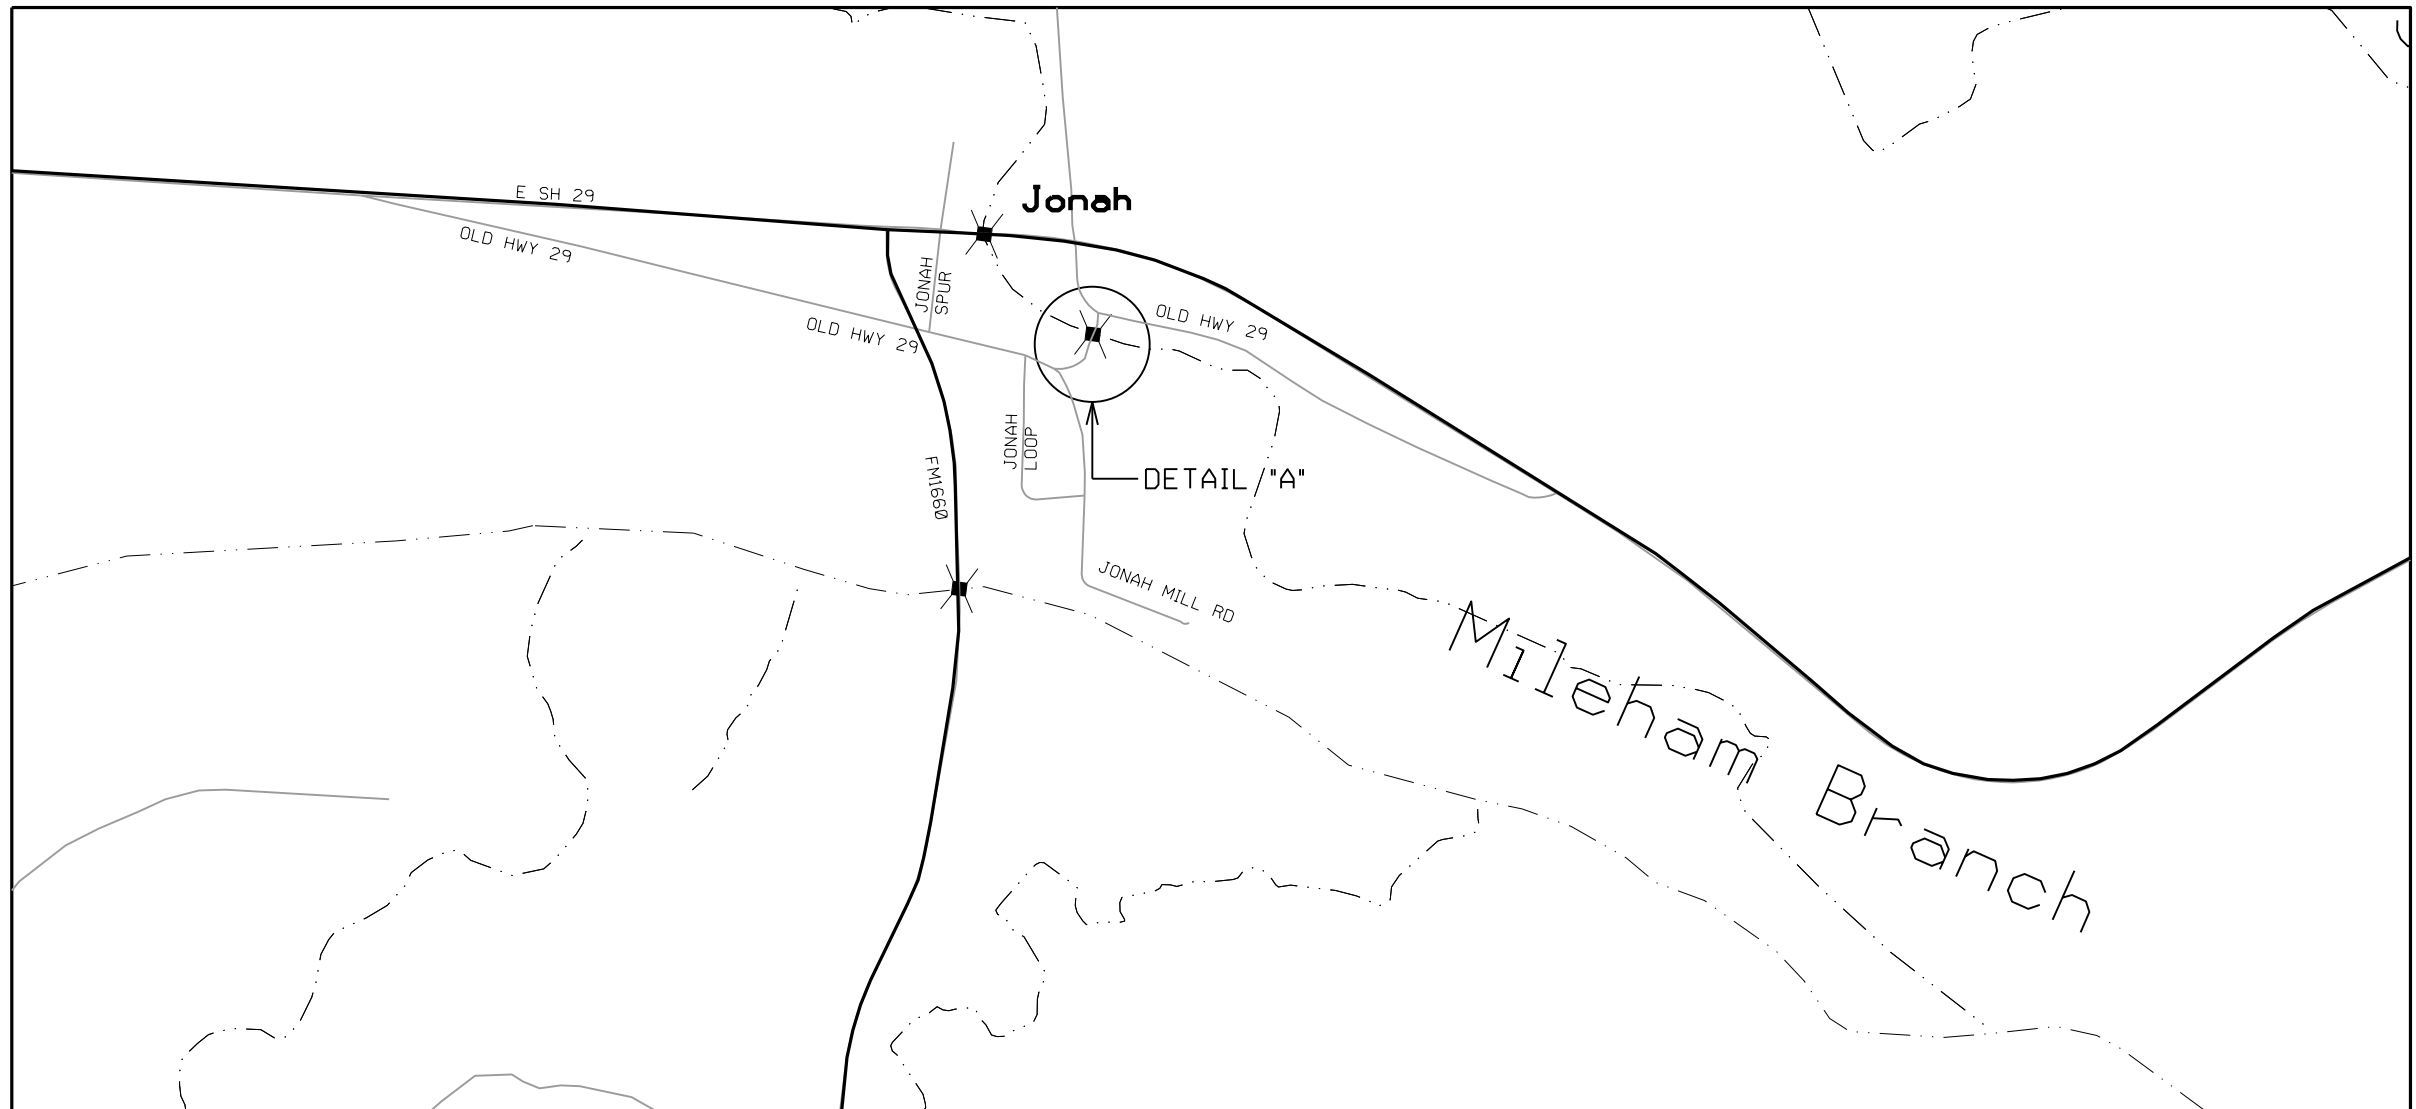

DocuSigned by:
Amro Gaber
 DAD0168DA9D443D...

9/28/2023


TCP NARRATIVE

1. INSTALL PROJECT BARRICADES AND LEAD-IN SIGNING PER BC(2) AND AS DIRECTED.
2. INSTALL EROSION CONTROL DEVICES AS SHOWN OR AS DIRECTED.
3. PREPARE RIGHT OF WAY.
4. INSTALL WORK AREAS AND REMOVE BRIDGE.
5. REMOVE OLD STRUCTURE INCLUDING PULLING OUT SPANS, CUT INTERIOR BENTS, AND PULL OUT ABUTMENTS.
6. GRADE ABUTMENT SLOPES AND PLACE STONE RIPRAP.
7. REMOVE BRIDGE APPROACHE PAVEMENT.
8. REMOVE OLD SIGNS, INSTALL NEW SIGNS AND BARRICADES, AND PLACE PERMANENT EROSION CONTROL MEASURES.
9. PERFORM PUNCH LIST ITEMS.
10. REMOVE TEMPORARY BARRICADES AND REPLACE WITH PERMANENT ONES.

SIGNS MAY BE ADJUSTED TO FIT EXISTING DRIVEWAYS AS APPROVED BY THE ENGINEER.


GENERAL NOTES

1. BE AWARE OF EXISTING OVERHEAD UTILITY LINES.
2. INSTALL ROAD CLOSED SIGNS PER BC(10)-21 DURING CONSTRUCTION

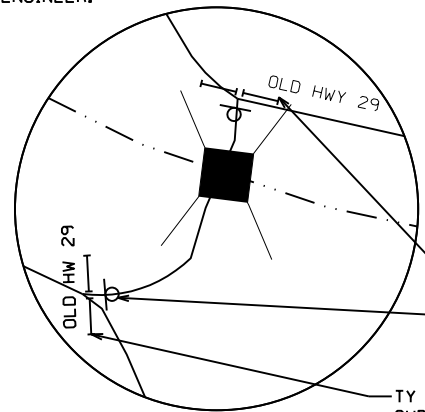

DETAIL 'A'

TY III (TYP) BARRICADES SUPPLEMENTED WITH WATER BARRIERS AND OTHER TRAFFIC CONTROL MEASURES AS NEEDED

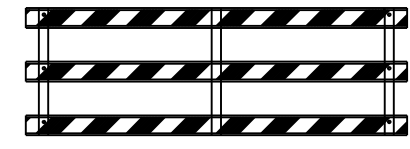

TYPE III BARRICADES

**Austin District
Central Design**

Texas Department of Transportation

**CR 126 AT MILEHAM BR.
SEQUENCE OF WORK
LAYOUT**

SHEET 1 OF 1

© 2023	CONT	SECT	JOB	HIGHWAY
DS: CR:	0914	05	137	CR 126
DW: CR:	DIST		COUNTY	SHEET NO.
	AUS		WILLIAMSON	6

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.


COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

<p>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov</p>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for any errors or omissions.

DATE: 9/26/2023 12:37:36 AM
 FILE: p:\t\tdot\project\online\com\1\0014\Documents\14 - AUS\Standards\Statewide Standards\Traffic\Barricade and Construction\BC(1)-21.dgn

 Texas Department of Transportation		Traffic Safety Division Standard	
<p>BARRICADE AND CONSTRUCTION GENERAL NOTES AND REQUIREMENTS</p> <p>BC(1)-21</p>			
FILE:	bc-21.dgn	DW:	TxDOT
© TxDOT	November 2002	CONT:	0914
		SECT:	05
		JOB:	137
		HIGHWAY:	CR 126
REVISIONS		DIST:	AUS
4-03	7-13	COUNTY:	WILLIAMSON
9-07	8-14	SHEET NO.:	7
5-10	5-21		


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other standard or for any errors or omissions in this standard.

TYPICAL LOCATION OF CROSSROAD SIGNS

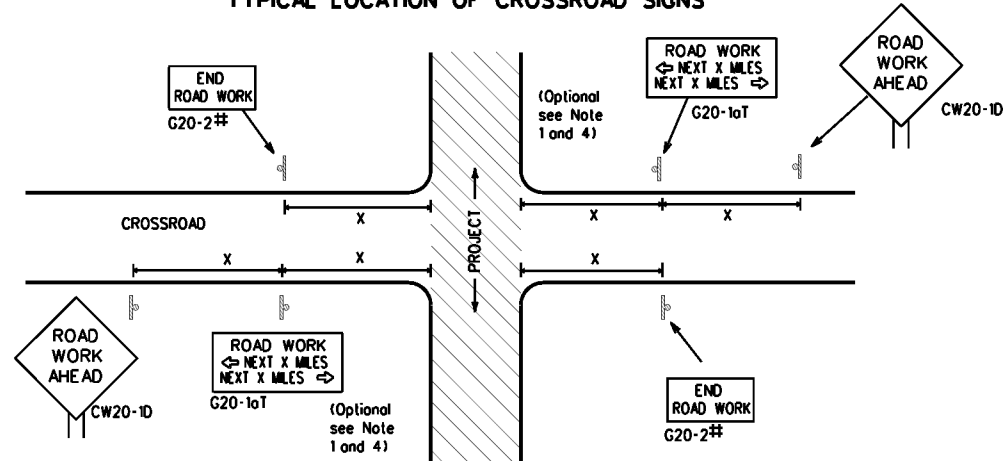

- # May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
 - The Engineer may use the reduced size 36" x 36" "ROAD WORK AHEAD" (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
 - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
 - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
 - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
 - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

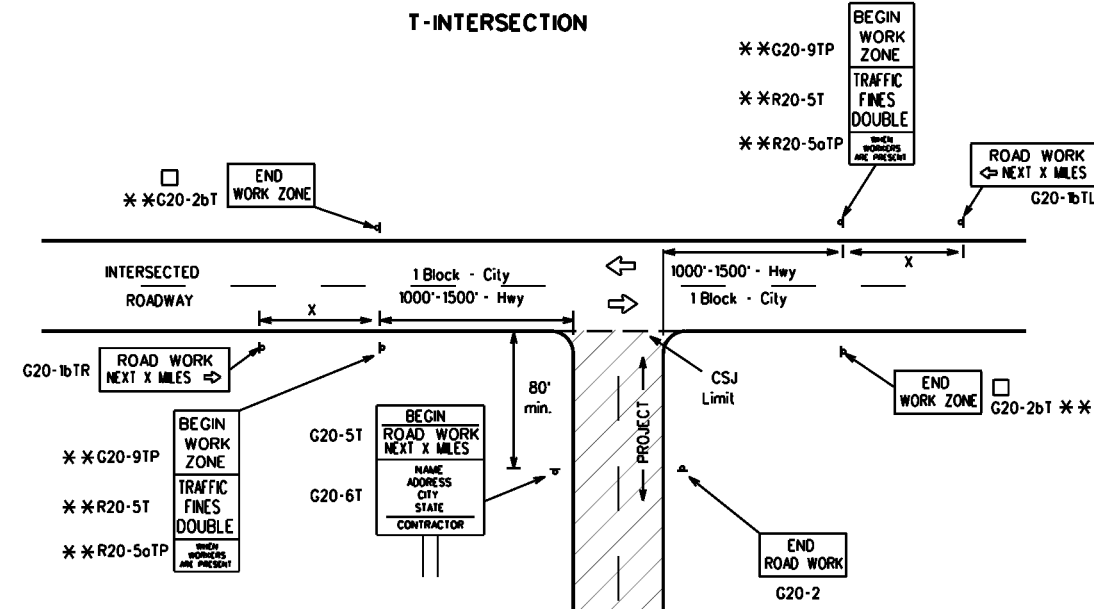

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING


Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign * Spacing "X" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW23			40	240
CW25			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
*			*	* ³

- * For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.
- * Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

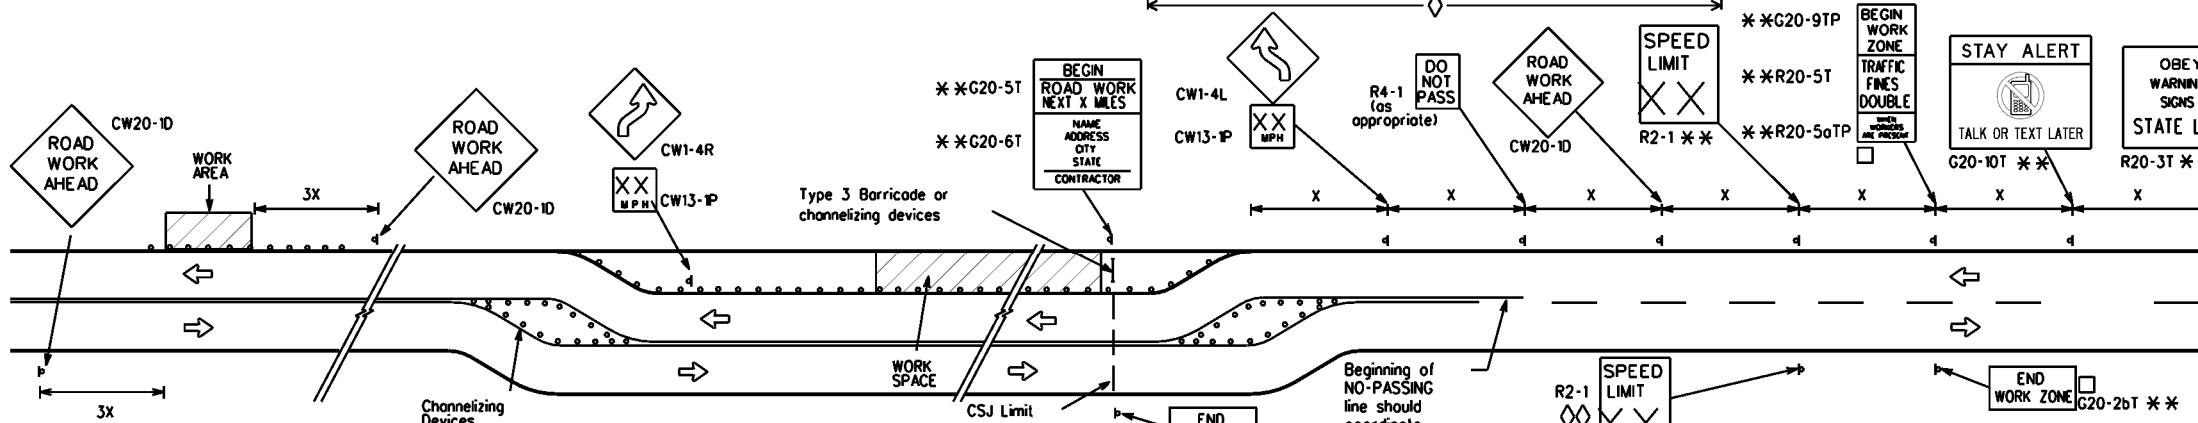


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

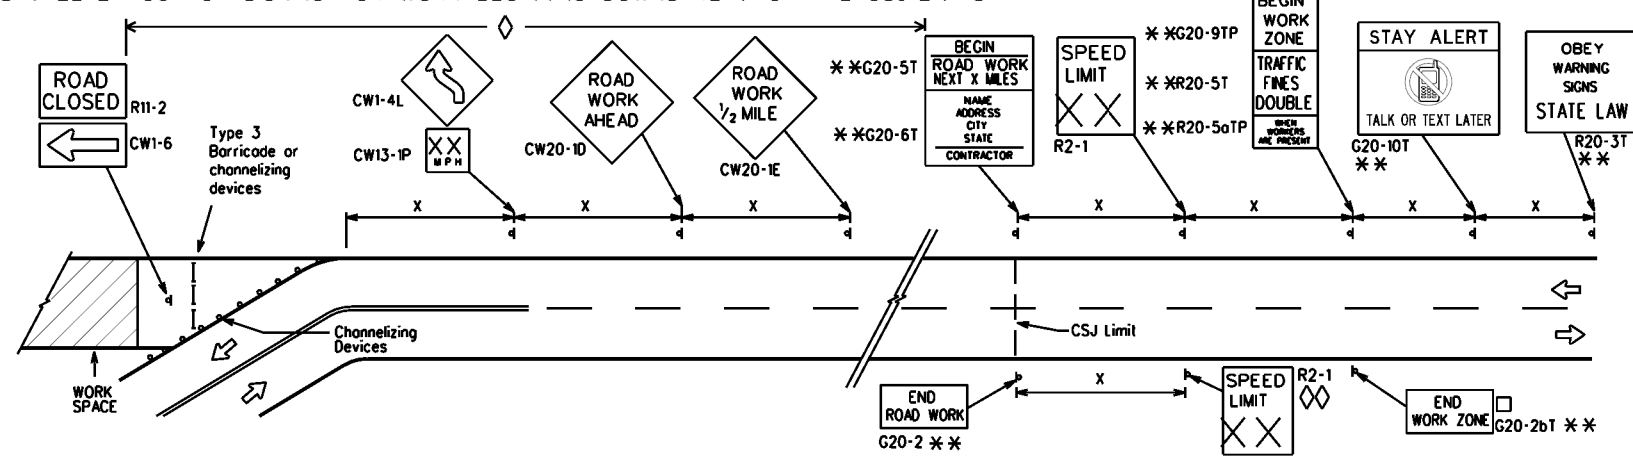

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS

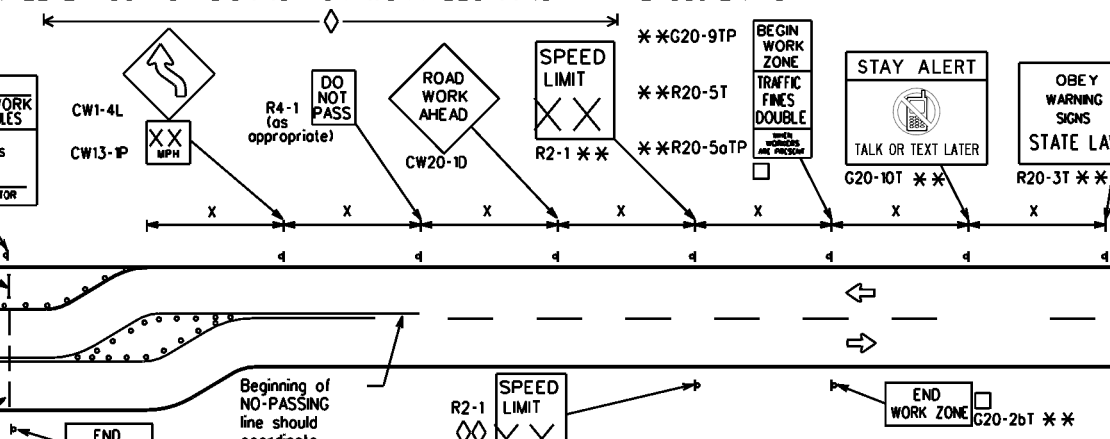

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
- CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
- Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
- Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12

Texas Department of Transportation
Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION PROJECT LIMIT


BC(2)-21

FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0914	05	137	CR 126
9-07 8-14	DIST	COUNTY		SHEET NO.
7-13 5-21	AUS	WILLIAMSON		8

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

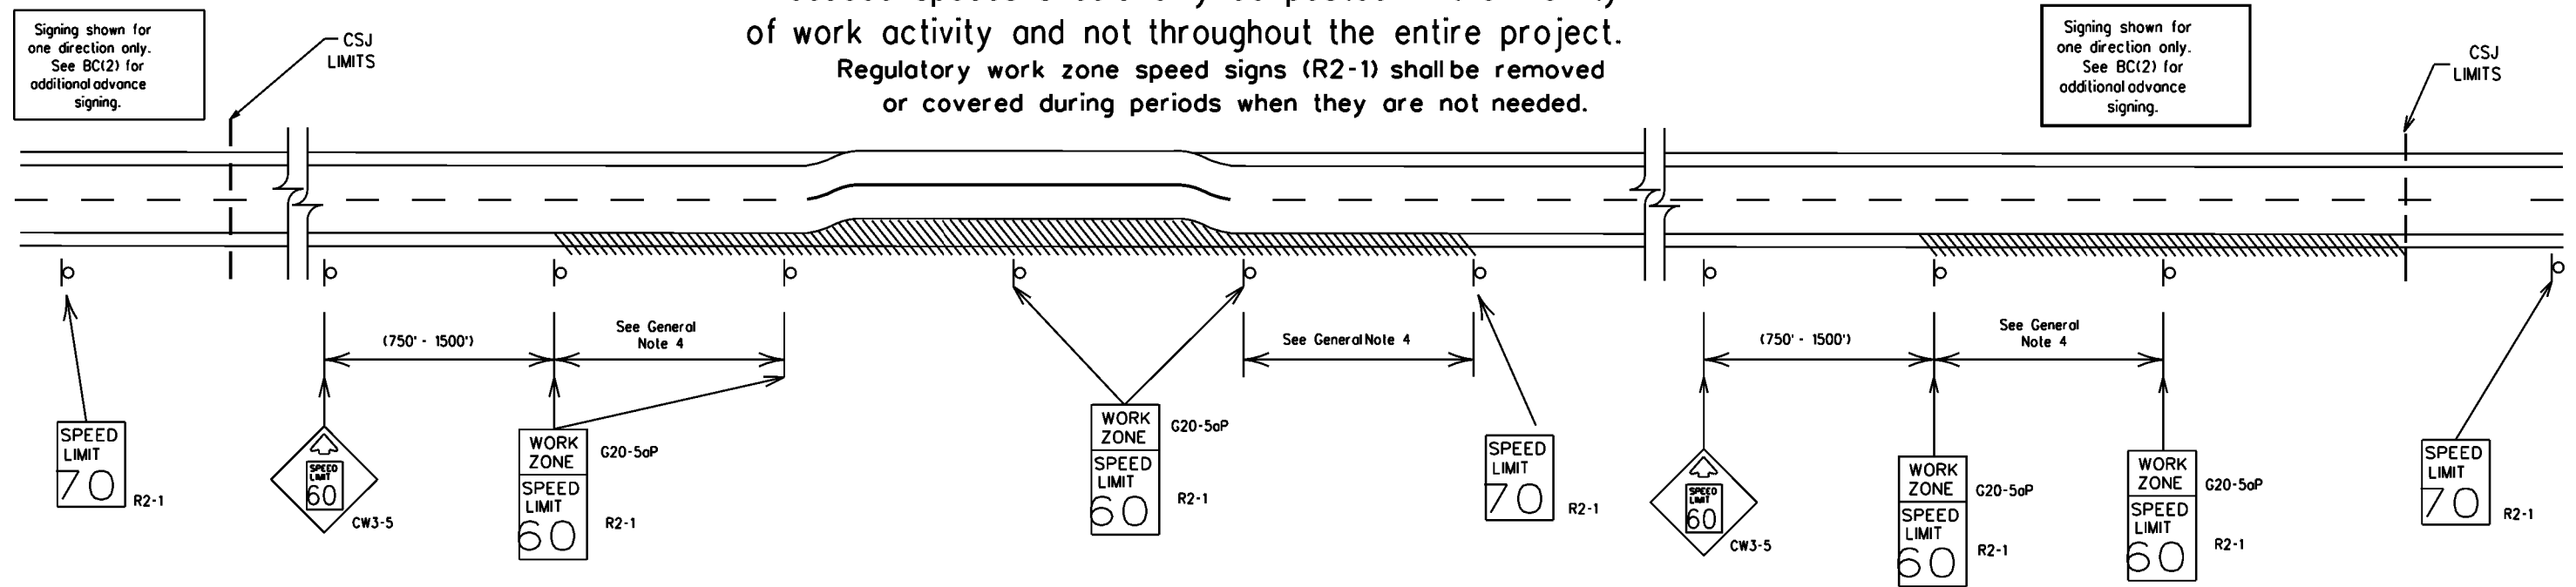

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
 - 40 mph and greater 0.2 to 2 miles
 - 35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Low enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form *1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other standard or for any errors or omissions in this standard.

DATE: 9/26/2023 12:37:43 AM
FILE: p:\t\dot\pro\lect\wiseonline.com\1\0014\Documents\14 - AUS\Standards\Statewide\BC(3)-21.dgn




BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT

BC(3)-21

FILE:	bc-21.dgn	DW:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT:	0914	SECT:	05	JOB:	137	HIGHWAY:	CR 126
REVISIONS:		DIST:	AUS	COUNTY:	WILLIAMSON	SHEET NO.:	9		
9-07	8-14								
7-13	5-21								


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

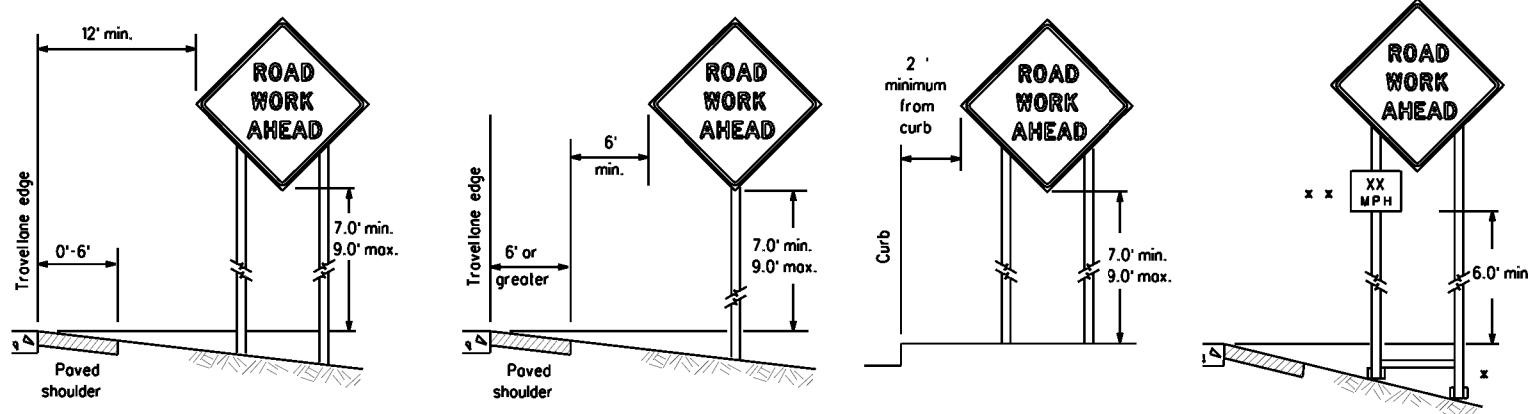

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

* * When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

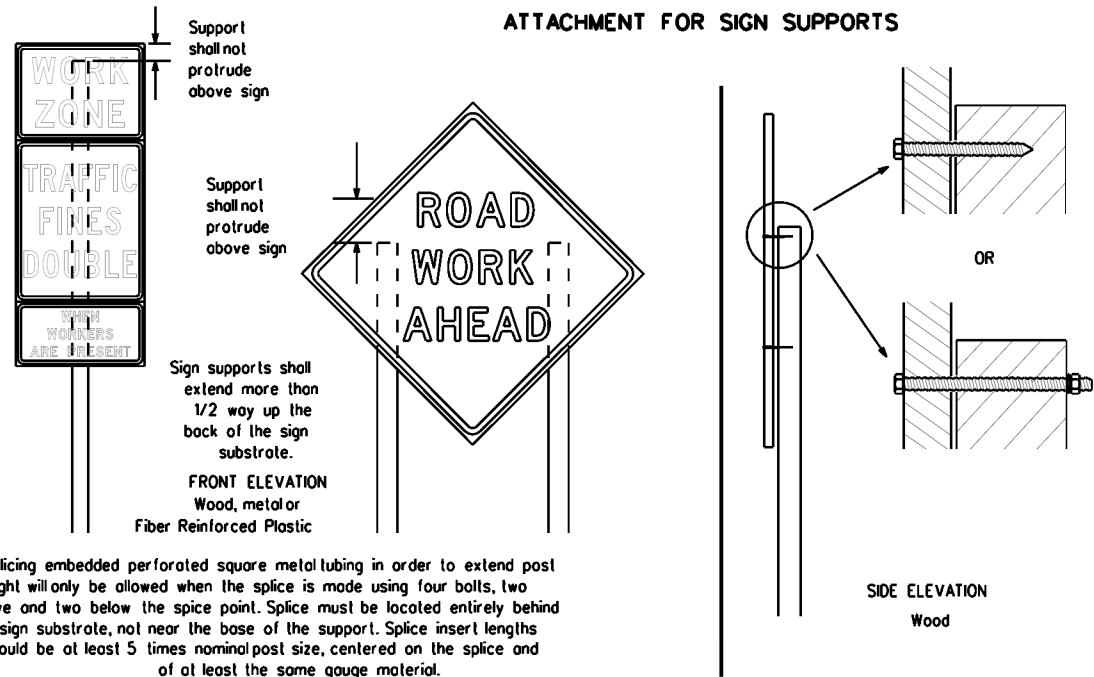


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nails shall NOT be allowed.
Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflectORIZED when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

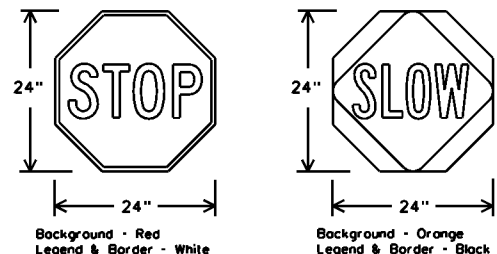

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRS standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B or Type C, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

Texas Department of Transportation
Traffic Safety Division Standard

BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES



BC(4)-21

FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002		CONT	SECT	JOB
REVISIONS		0914	05	137
9-07	8-14	DIST		COUNTY
7-13	5-21	AUS		WILLIAMSON
HIGHWAY				CR 126
SHEET NO.				10

DATE: 9/26/2023 12:37:46 AM
 FILE: pwr://txdot-proj/sectwiseonline.com/txdot14/Documents/14 - AUS/Standards/Statewide Standards/Traffic/13-Barricade and Construction/BC-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for the results or design of any construction project resulting from its use.

DATE: 9/26/2023 12:37:49 AM
 FILE: p:\t\dot\project\wiseonline.com\14\0014\Documents\14 - AUS\Standards\Statewide Standards\Traffic\Barricade and Construction\BC-21.dwg

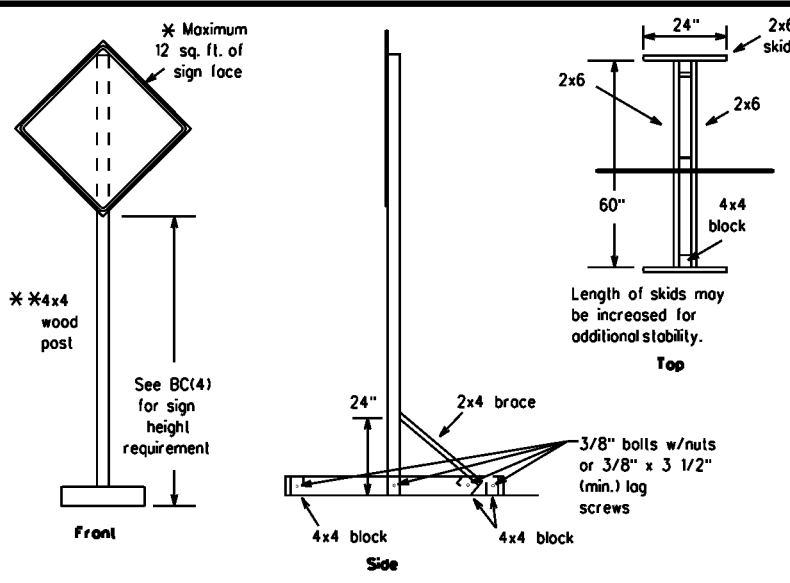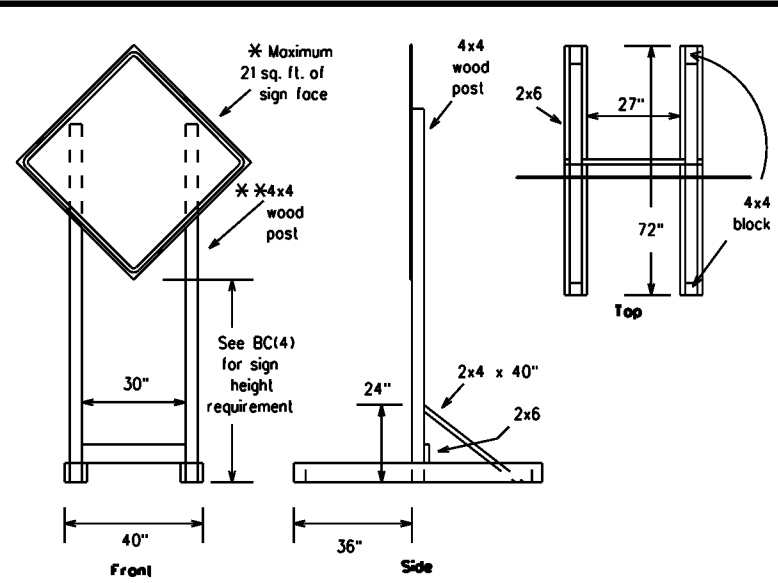



SKID MOUNTED WOOD SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

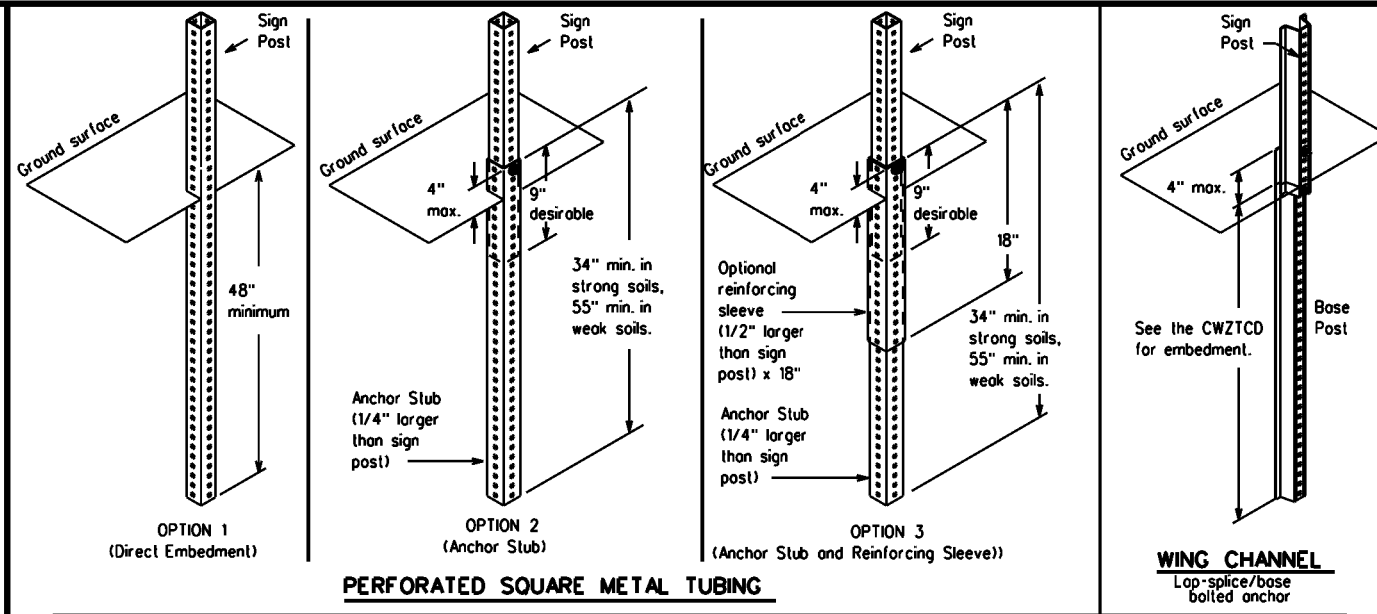

GROUND MOUNTED SIGN SUPPORTS

Refer to the CWZTC and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

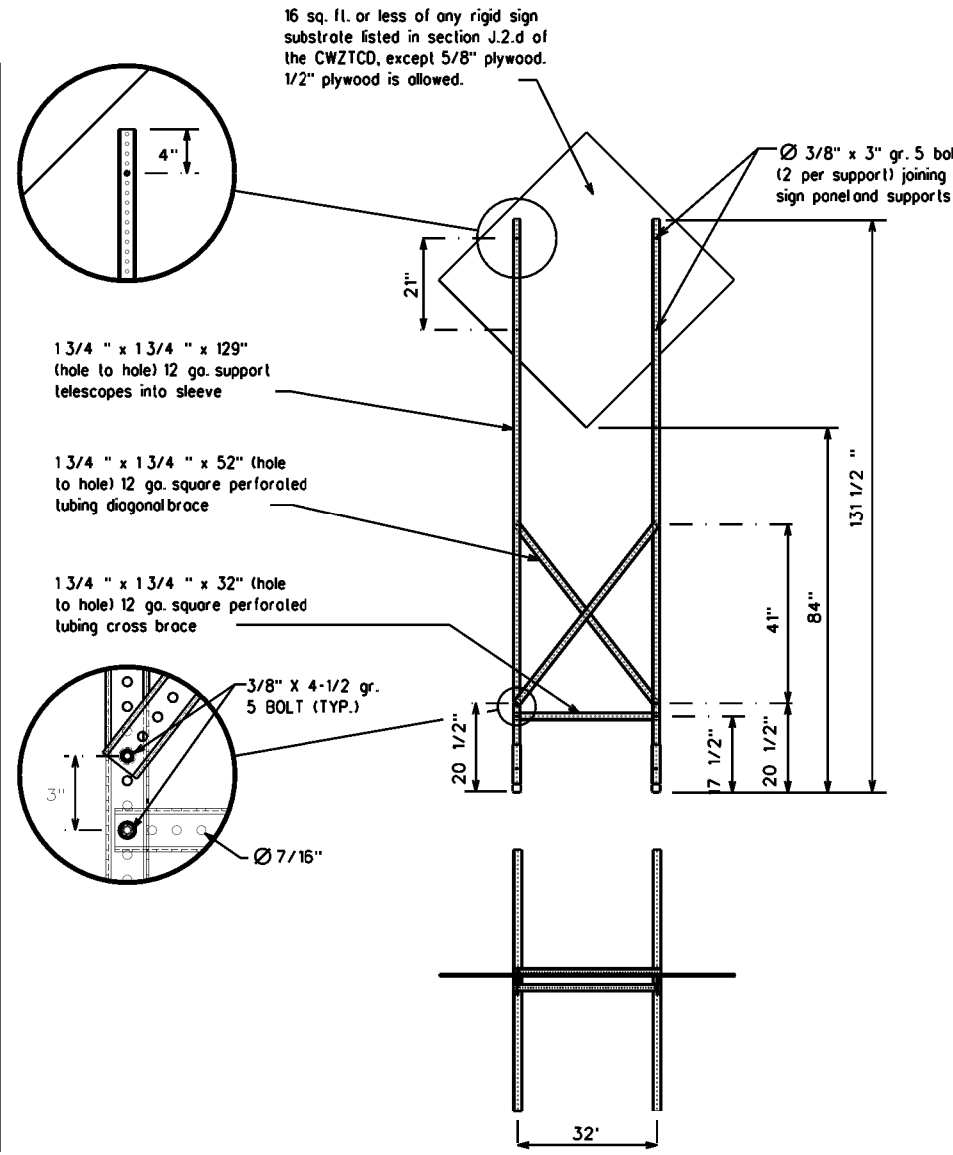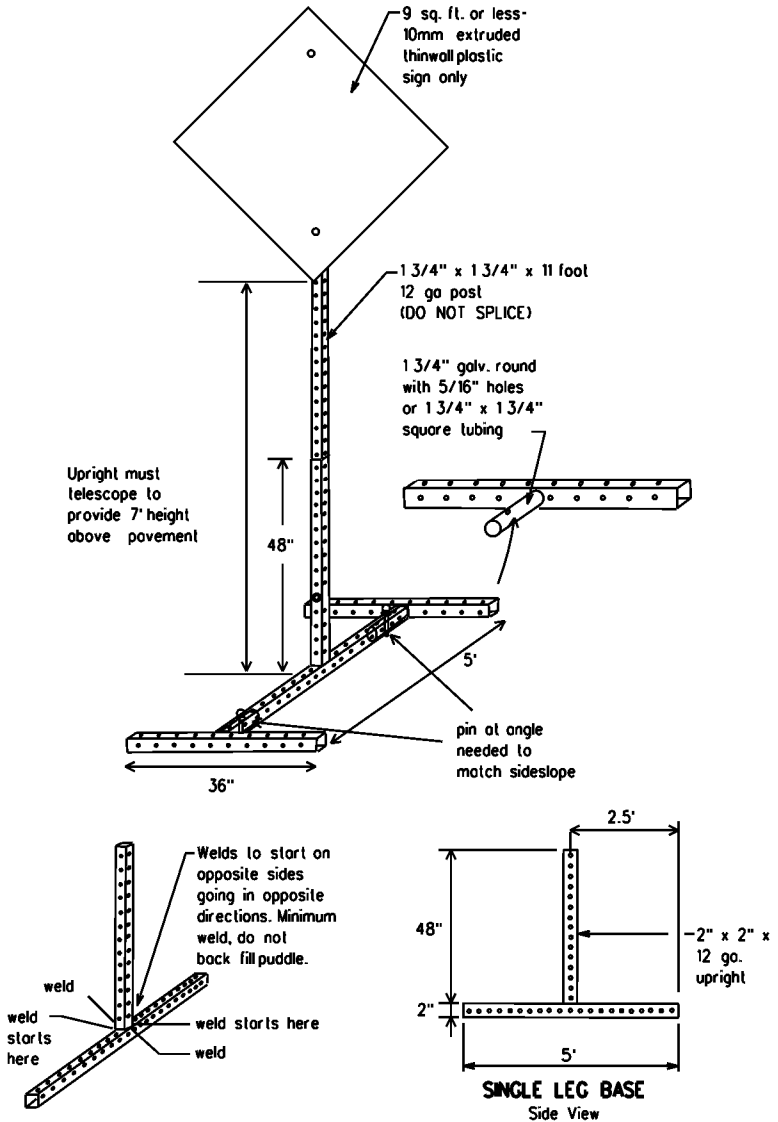

SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS

* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

WEDGE ANCHORS

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

OTHER DESIGNS

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTC LIST. SEE BC(1) FOR WEBSITE LOCATION.

GENERAL NOTES

1. Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
2. No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTC List.
3. When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- * See BC(4) for definition of "Work Duration."
- ** Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- See the CWZTC for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT

BC(5)-21

FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	OW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT: 0914	SECT: 05	JOB: 137	HIGHWAY: CR 126
REVISIONS: 9-07 8-14	DIST: AUS	COUNTY: WILLIAMSON	SHEET NO. 11	
7-13 5-21				

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

* * Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

* * See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS should be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbols/signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbols/signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for any errors or omissions in this standard or for any damage resulting from its use.

DATE: 9/26/2023 12:37:52 AM
FILE: p:\t\tdot\pro\ect\wiseonline.com\1\0014\Documents\14 - AUS\Standards\Statewide Standards\BC(6)-21.dgn

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canal	CANT	North	N
Center	CTR	Northbound (route) N	
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound (route) E		Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound (route) S	
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHs
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound (route) W	
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation = IH-number, US-number, SH-number, FM-number



BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)


BC(6)-21

FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0914	05	137	CR 126
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	AUS	WILLIAMSON	12	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/26/2023 12:37:55 AM
 FILE: pwr://ttdot-projlectwiseonline.com/ttdot14/Documents/14 - AUS/Standards/Statewide Standards/Traffic/13-Barrier and Construction/BC-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

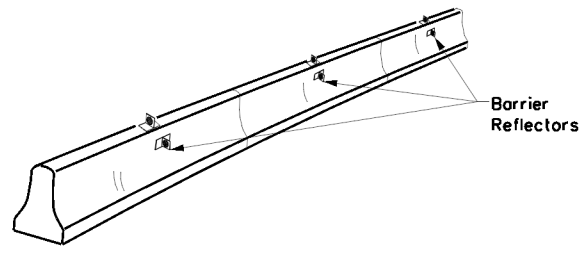

CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edge line being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

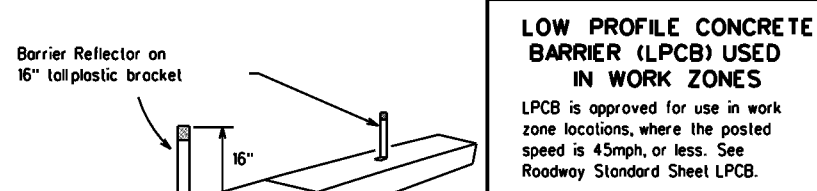


LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

LOW PROFILE CONCRETE BARRIER (LPCB)

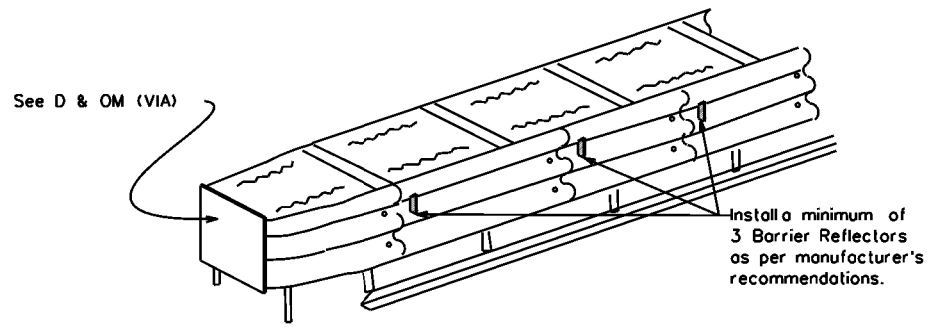


DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES
 End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B or C sheeting, meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.



Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS

- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.




Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

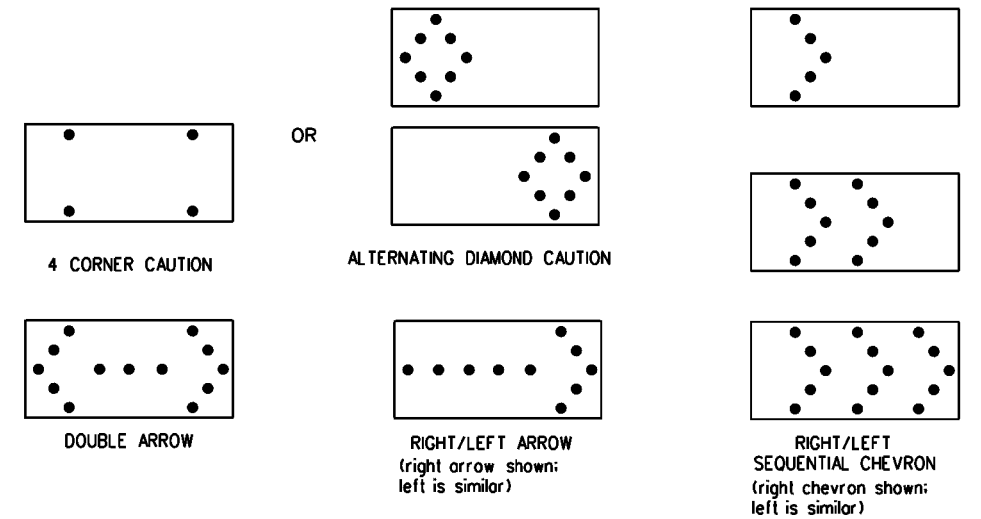

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution display as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC(7)-21

FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	0914	05	137	CR 126
9-07 8-14	DIST	COUNTY		SHEET NO.
7-13 5-21	AUS	WILLIAMSON		13

DATE: 9/26/2023 12:37:57 AM
 FILE: p:\t\dot\project\online\com\1\0014\Documents\14 - AUS\Standards\Statewide Standards\Traffic\13-Barricade and Construction\BC-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS

Pre-qualified plastic drums shall meet the following requirements:




- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.



BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

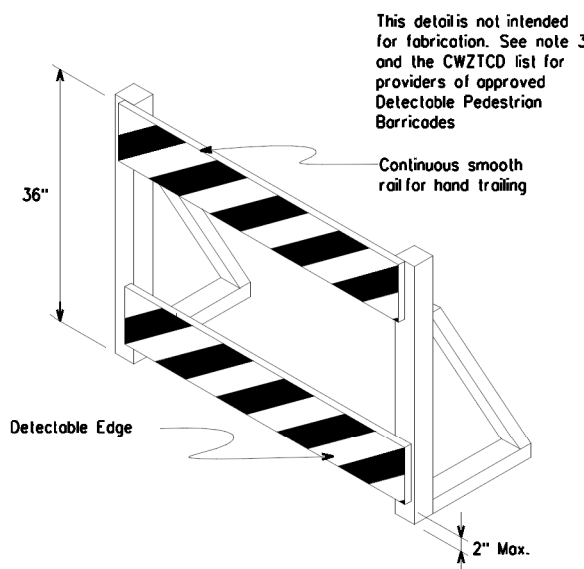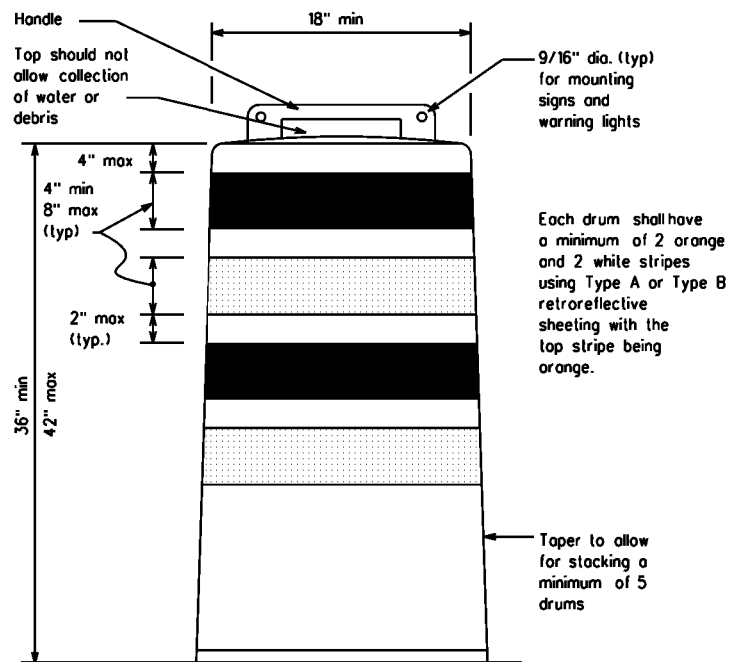

DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B or Type C Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than one every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(8)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT:	0914	SECT:	05	JOB:	137	CR:	126
4-03	8-14	DIST:	AUS	COUNTY:	WILLIAMSON	SHEET NO.:	14		
9-07	5-21								
7-13									

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 9/26/2023 12:37:59 AM
 FILE: pwr://ttdot-proj/ectwiseonline.com/ttdot14/Documents/14 - AUS/Standards/Statewide Standards/Traffic/13-Barricade and Construction/BC-21.dgn

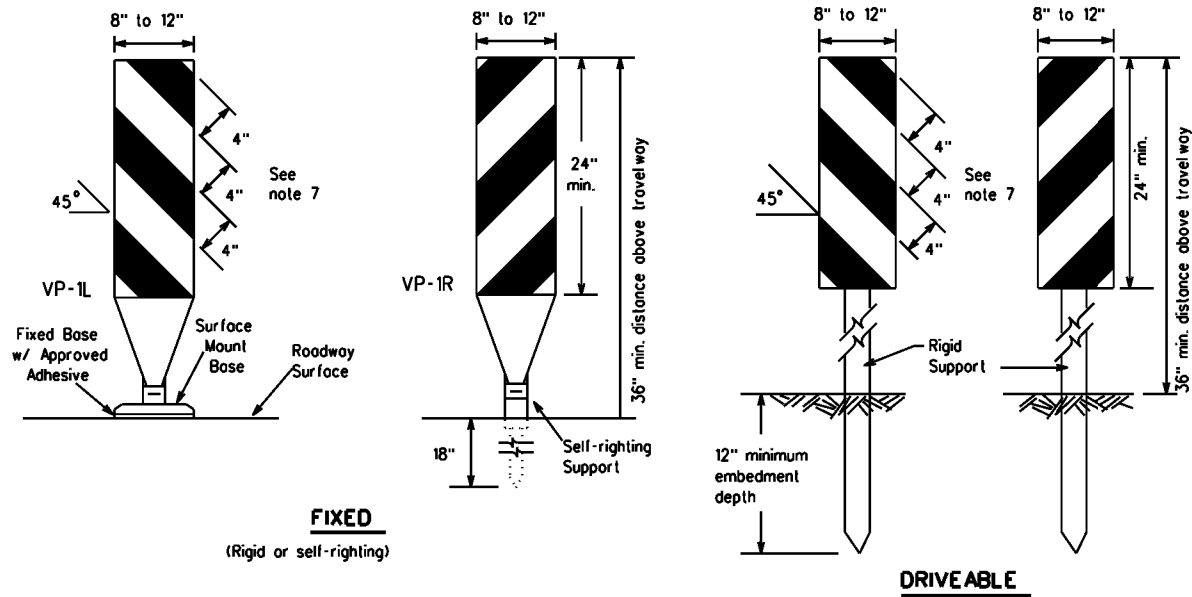

FIXED
(Rigid or self-righting)


DRIVEABLE

1. Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
2. VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
3. VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
4. VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
5. Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
6. Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
7. Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

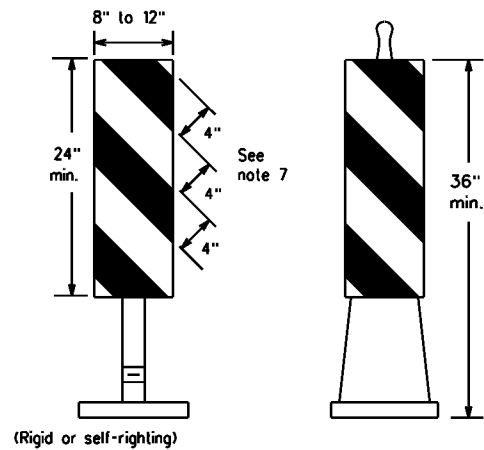


PORTABLE

VERTICAL PANELS (VPs)

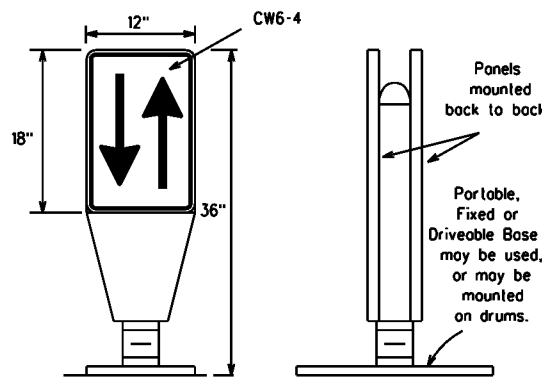

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)


1. Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
2. The OTLD may be used in combination with 42" cones or VP's.
3. Spacing between the OTLD shall not exceed 500 feet. 42" cones or VP's placed between the OTLD's should not exceed 100 foot spacing.
4. The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

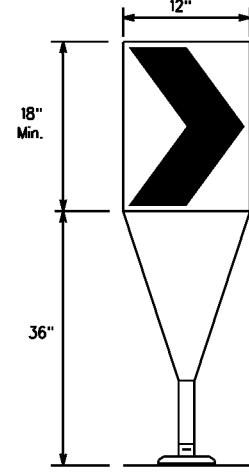

Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

1. The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
2. Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
3. Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
4. To be effective, the chevron should be visible for at least 500 feet.
5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
6. For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS



LONGITUDINAL CHANNELIZING DEVICES (LCD)

1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
2. LCDs may be used instead of a line of cones or drums.
3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
5. LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

1. Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
2. Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
3. Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
4. Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
5. When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

1. Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
5. Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
6. Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
7. The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

x x Taper lengths have been rounded off.
 L- Length of Taper (FT.) W- Width of Offset (FT.)
 S- Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(9)-21


FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT: 0914	SECT: 05	JOB: 137	HIGHWAY: CR 126
REVISIONS	9-07	8-14	DIST: AUS	COUNTY: WILLIAMSON
	7-13	5-21		SHEET NO.: 15

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 9/26/2023 12:38:03 AM
 FILE: p:\t\dot\pro\lectwise\online.com\t\dot14\Documents\14 - AUS\Standards\Statewide Standards\Traffic\13-Barricade and Construction\BC-21.dgn


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.


Barricades shall NOT be used as a sign support.



TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

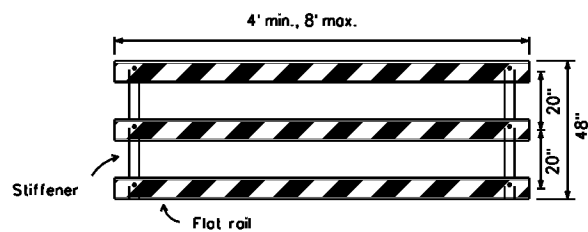


TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

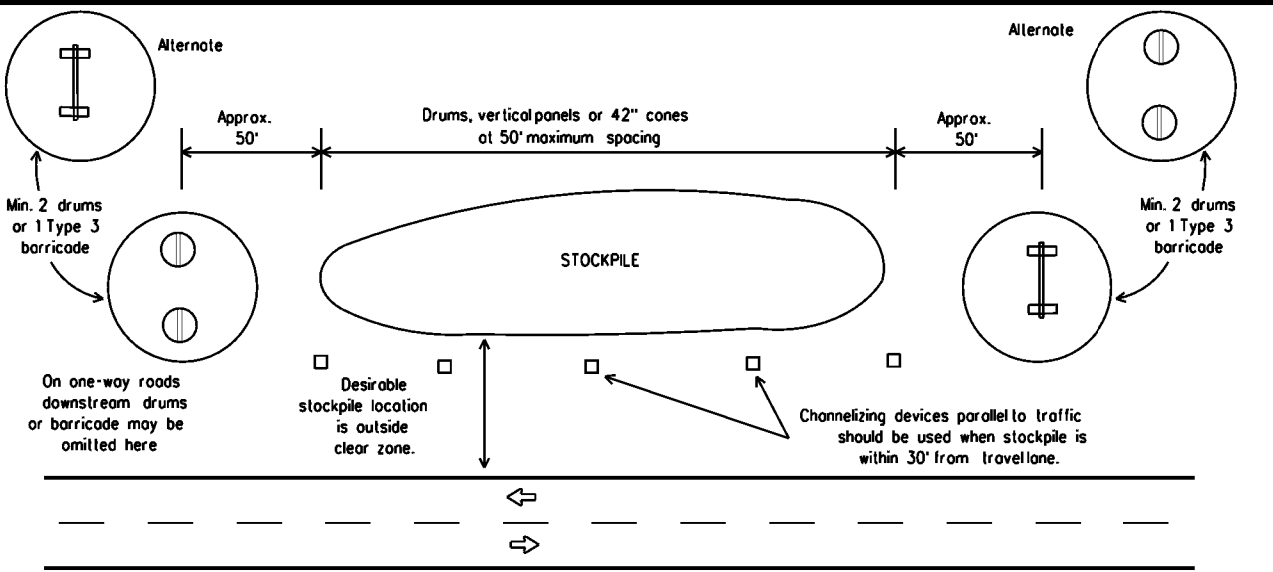


TRAFFIC CONTROL FOR MATERIAL STOCKPILES

Each roadway of a divided highway shall be barricaded in the same manner.

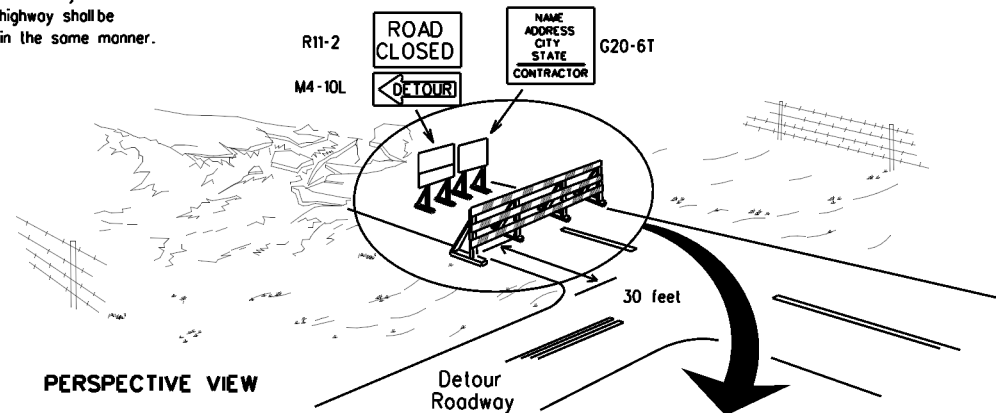

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

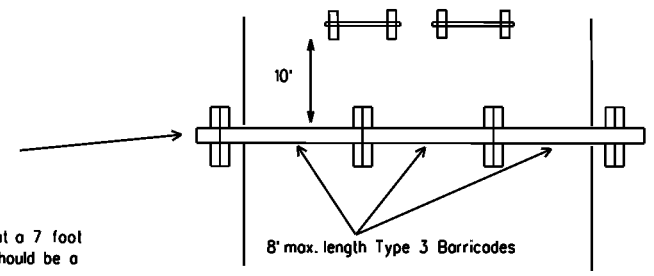


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

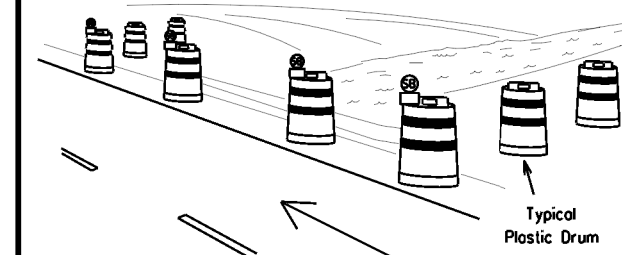

PERSPECTIVE VIEW

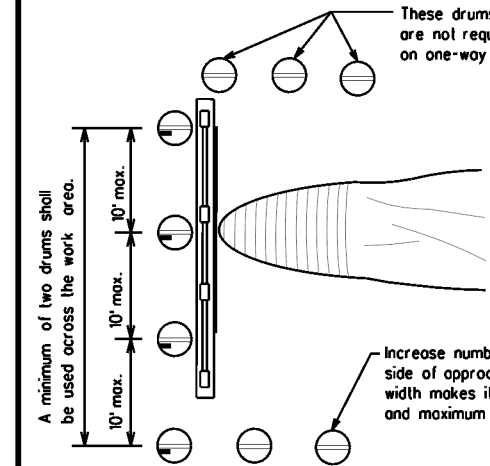


PLAN VIEW

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

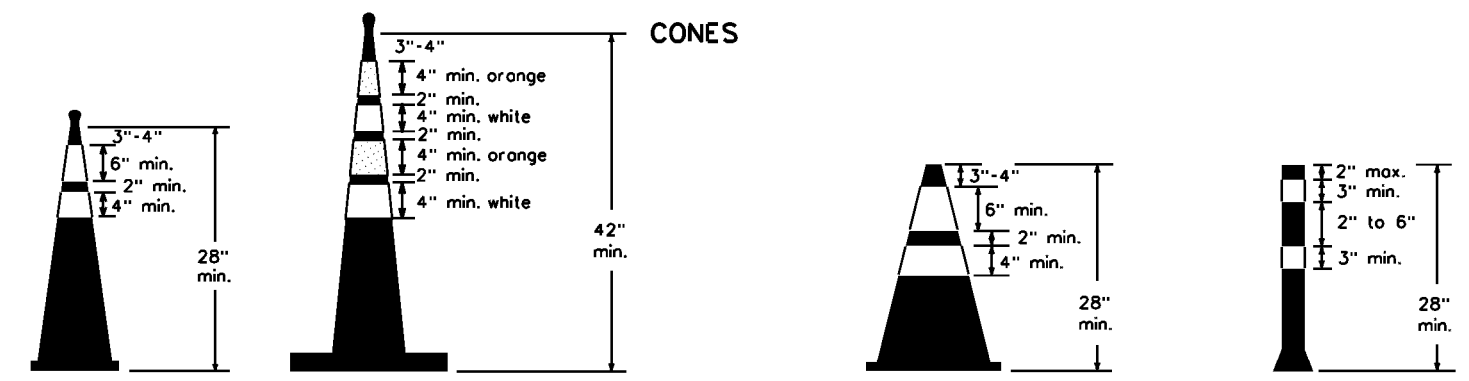

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT: 0914	SECT: 05	JOB: 137	HIGHWAY: CR 126
REVISIONS: 9-07 8-14	DIST: AUS	COUNTY: WILLIAMSON	SHEET NO. 16	
7-13 5-21				

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Block-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

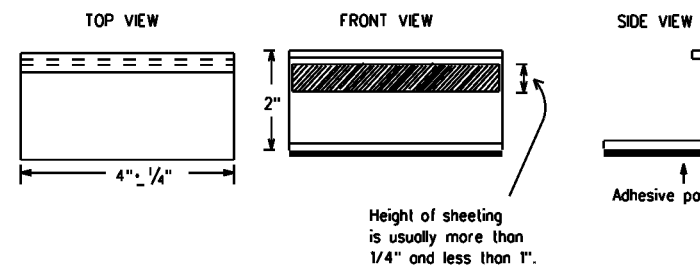

STAPLES OR NAILS SHALL NOT BE USED TO SECURE TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER TABS TO THE PAVEMENT SURFACE

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS





BC(11)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	February 1998	CONT:	0914	SECT:	05	JOB:	137	CR:	126
REVISIONS		DIST:	COUNTY:		SHEET NO.:				
2-98	9-07	5-21							
1-02	7-13								
11-02	8-14		AUS	WILLIAMSON		17			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.



DATE: 9/26/2023 12:38:04 AM
 FILE: pwr//ttdot/proj/ectwiseonline.com/ttdot14/Documents/14 - AUS/_Standards/Statewide Standards/Traffic/13-Barricade and Construction/BC-21.dgn

PAVEMENT MARKING PATTERNS

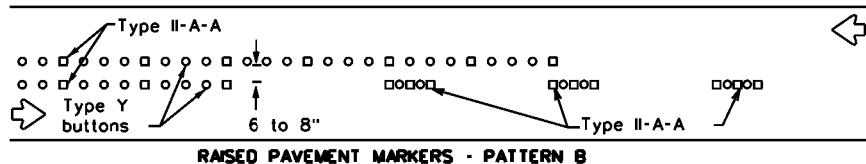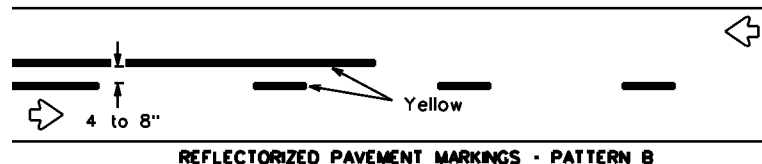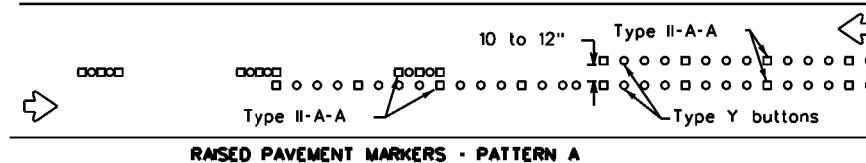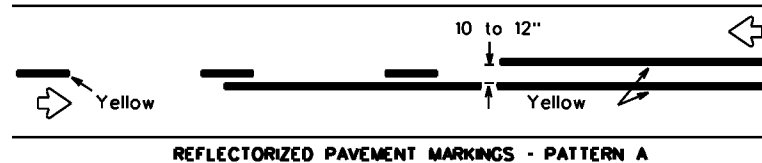



Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectORIZED pavement markings.

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

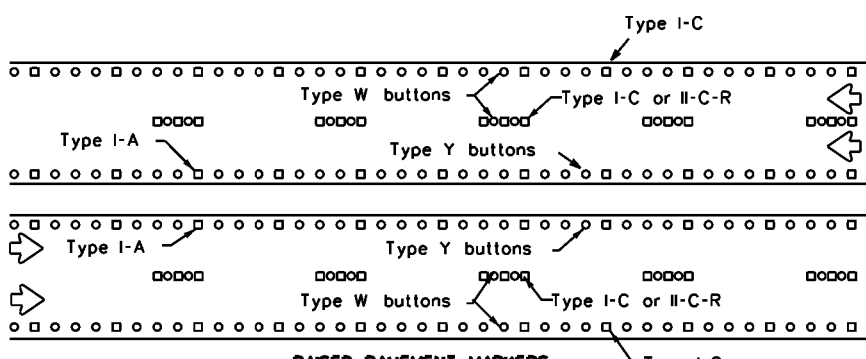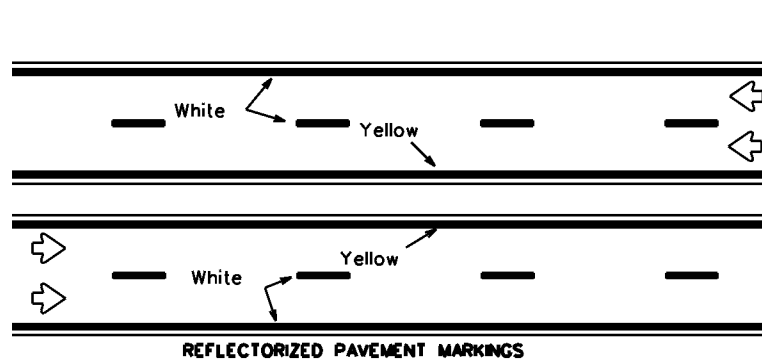



Prefabricated markings may be substituted for reflectORIZED pavement markings.

EDGE & LANE LINES FOR DIVIDED HIGHWAY

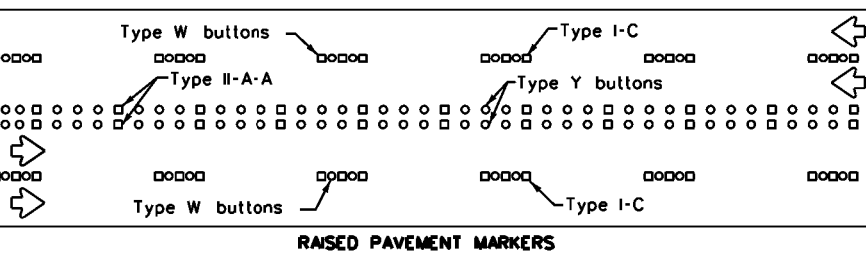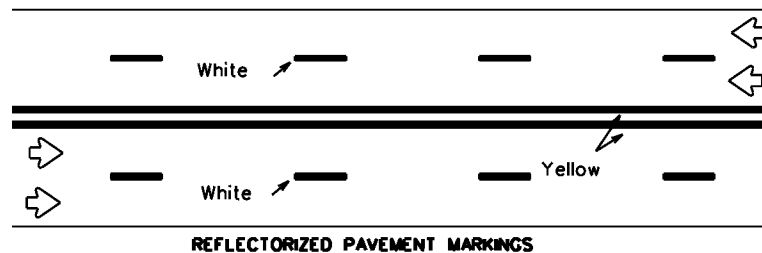

Prefabricated markings may be substituted for reflectORIZED pavement markings.


LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

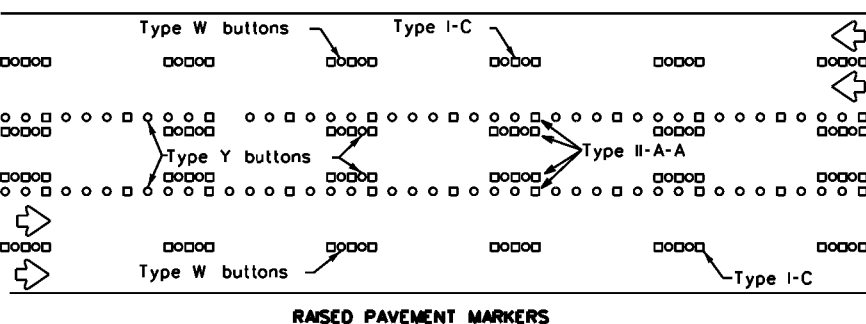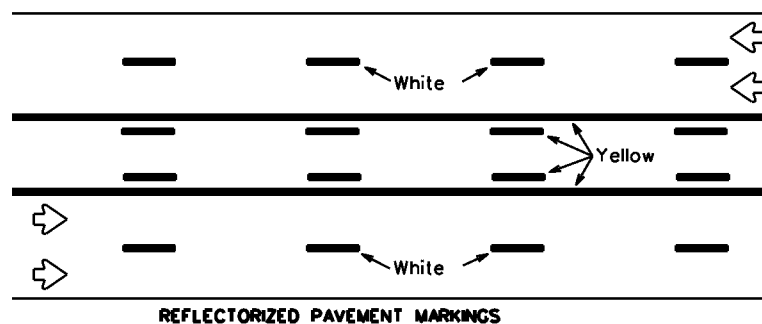




Prefabricated markings may be substituted for reflectORIZED pavement markings.

TWO-WAY LEFT TURN LANE


STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

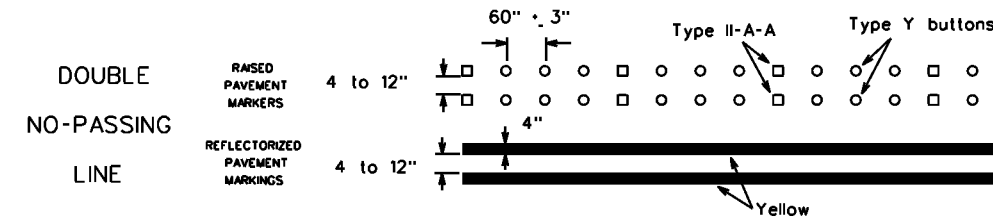

SOLID LINES

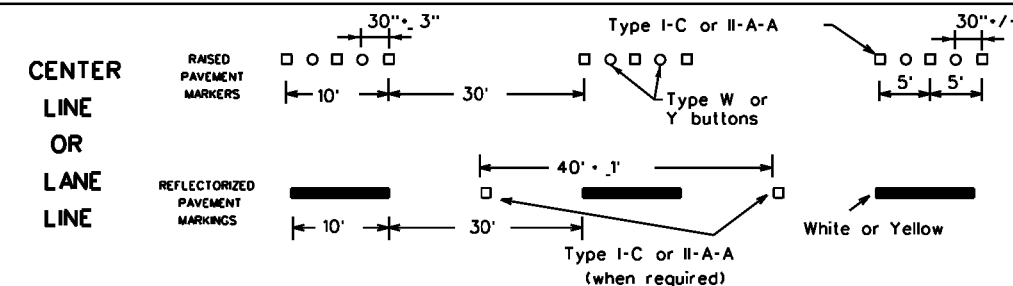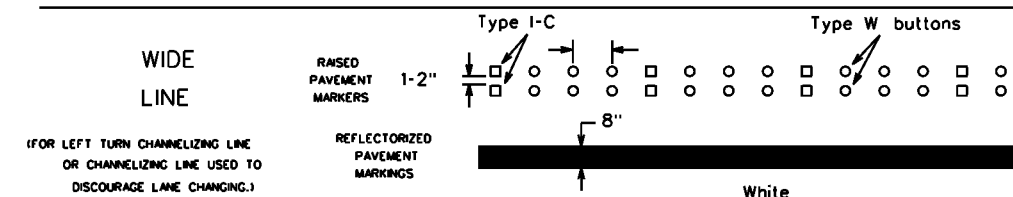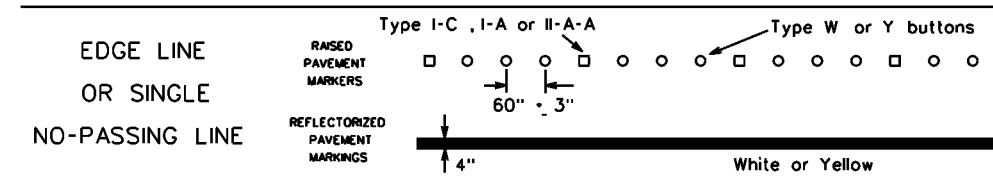


BROKEN LINES

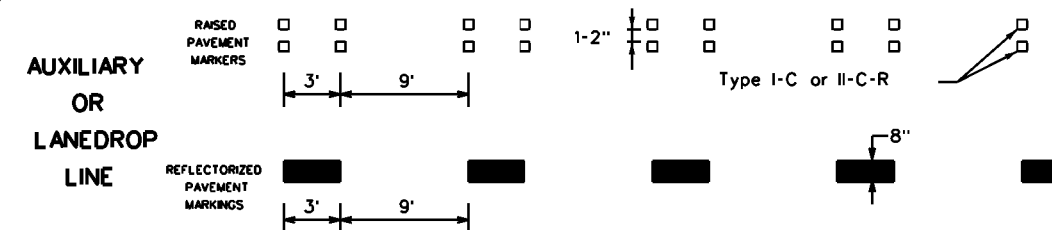

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

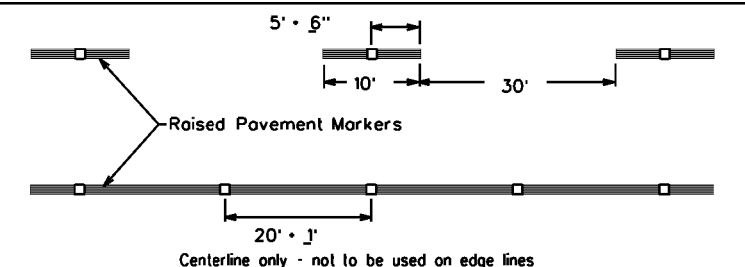

SHEET 12 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

FILE: bc-21.dgn	DW: TxDOT	CK: TxDOT	OW: TxDOT	CR: TxDOT
© TxDOT February 1998		CONT	SECT	JOB
REVISIONS		0914	05	137
1-97	9-07	5-21	HIGHWAY	
2-98	7-13	DIST		CR 126
11-02	8-14	COUNTY		SHEET NO.
AUS		WILLIAMSON		18


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/26/2023 12:38:05 AM
FILE: pwr://txdot-proj/ectwiseonline.com/txdot14/Documents/14 - AUS/Standards/Statewide Standards/Traffic/13-Barricade and Construction/BC-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/26/2023 12:38:09 AM
 FILE: pwc/txdot/projectwiseonline.com:TXDOT4\Documents\14 - AUS\Standards\Statewide Standards\Traffic\14-Work Zone\WZ(STPM)-23.dgn

WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS

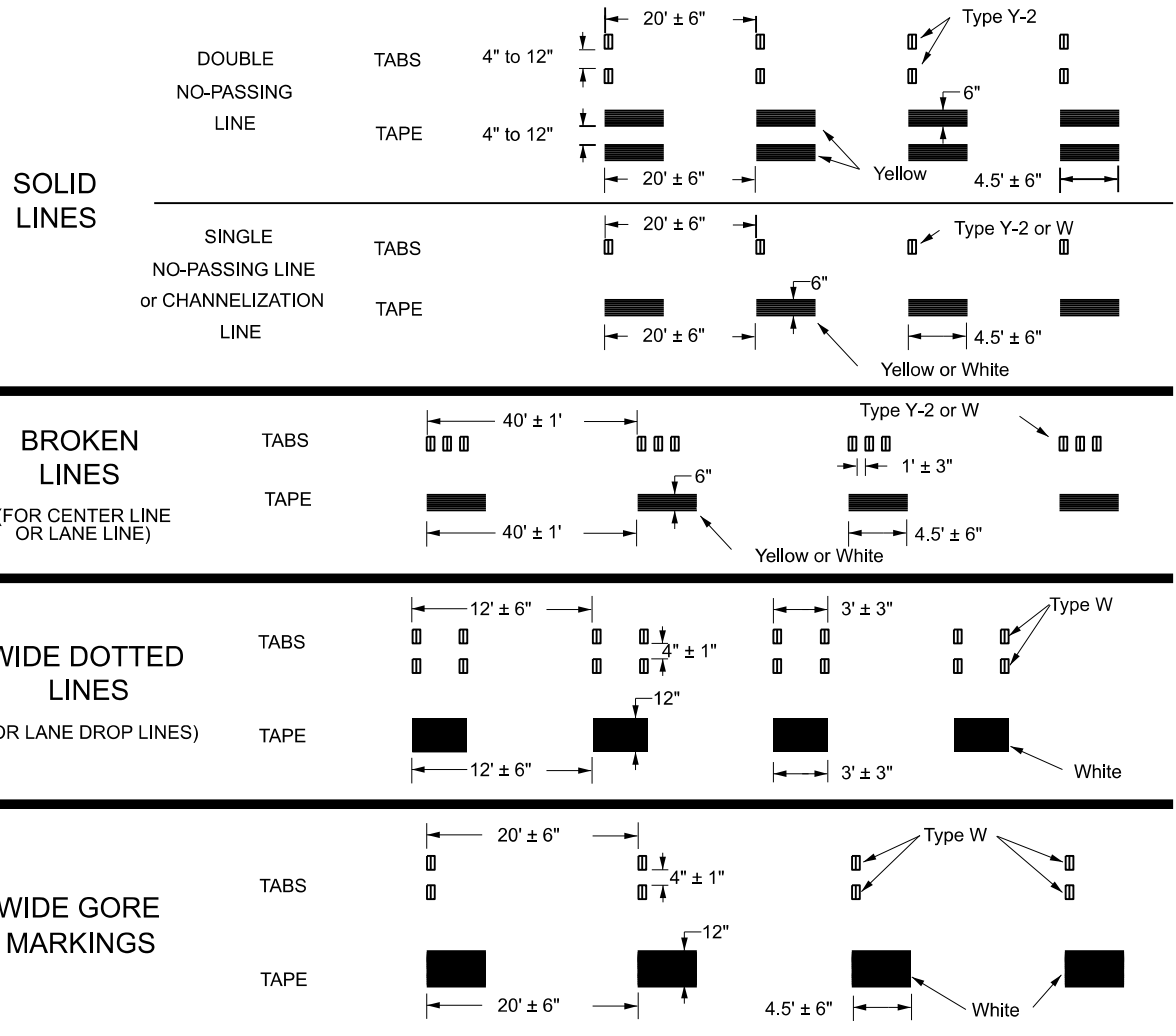



NOTES:

- Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexible reflective roadway marker tabs unless otherwise specified elsewhere in plans.
- Short term pavement markings shall NOT be used to simulate edge lines.
- Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones for up to 14 calendar days. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.

TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)

- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

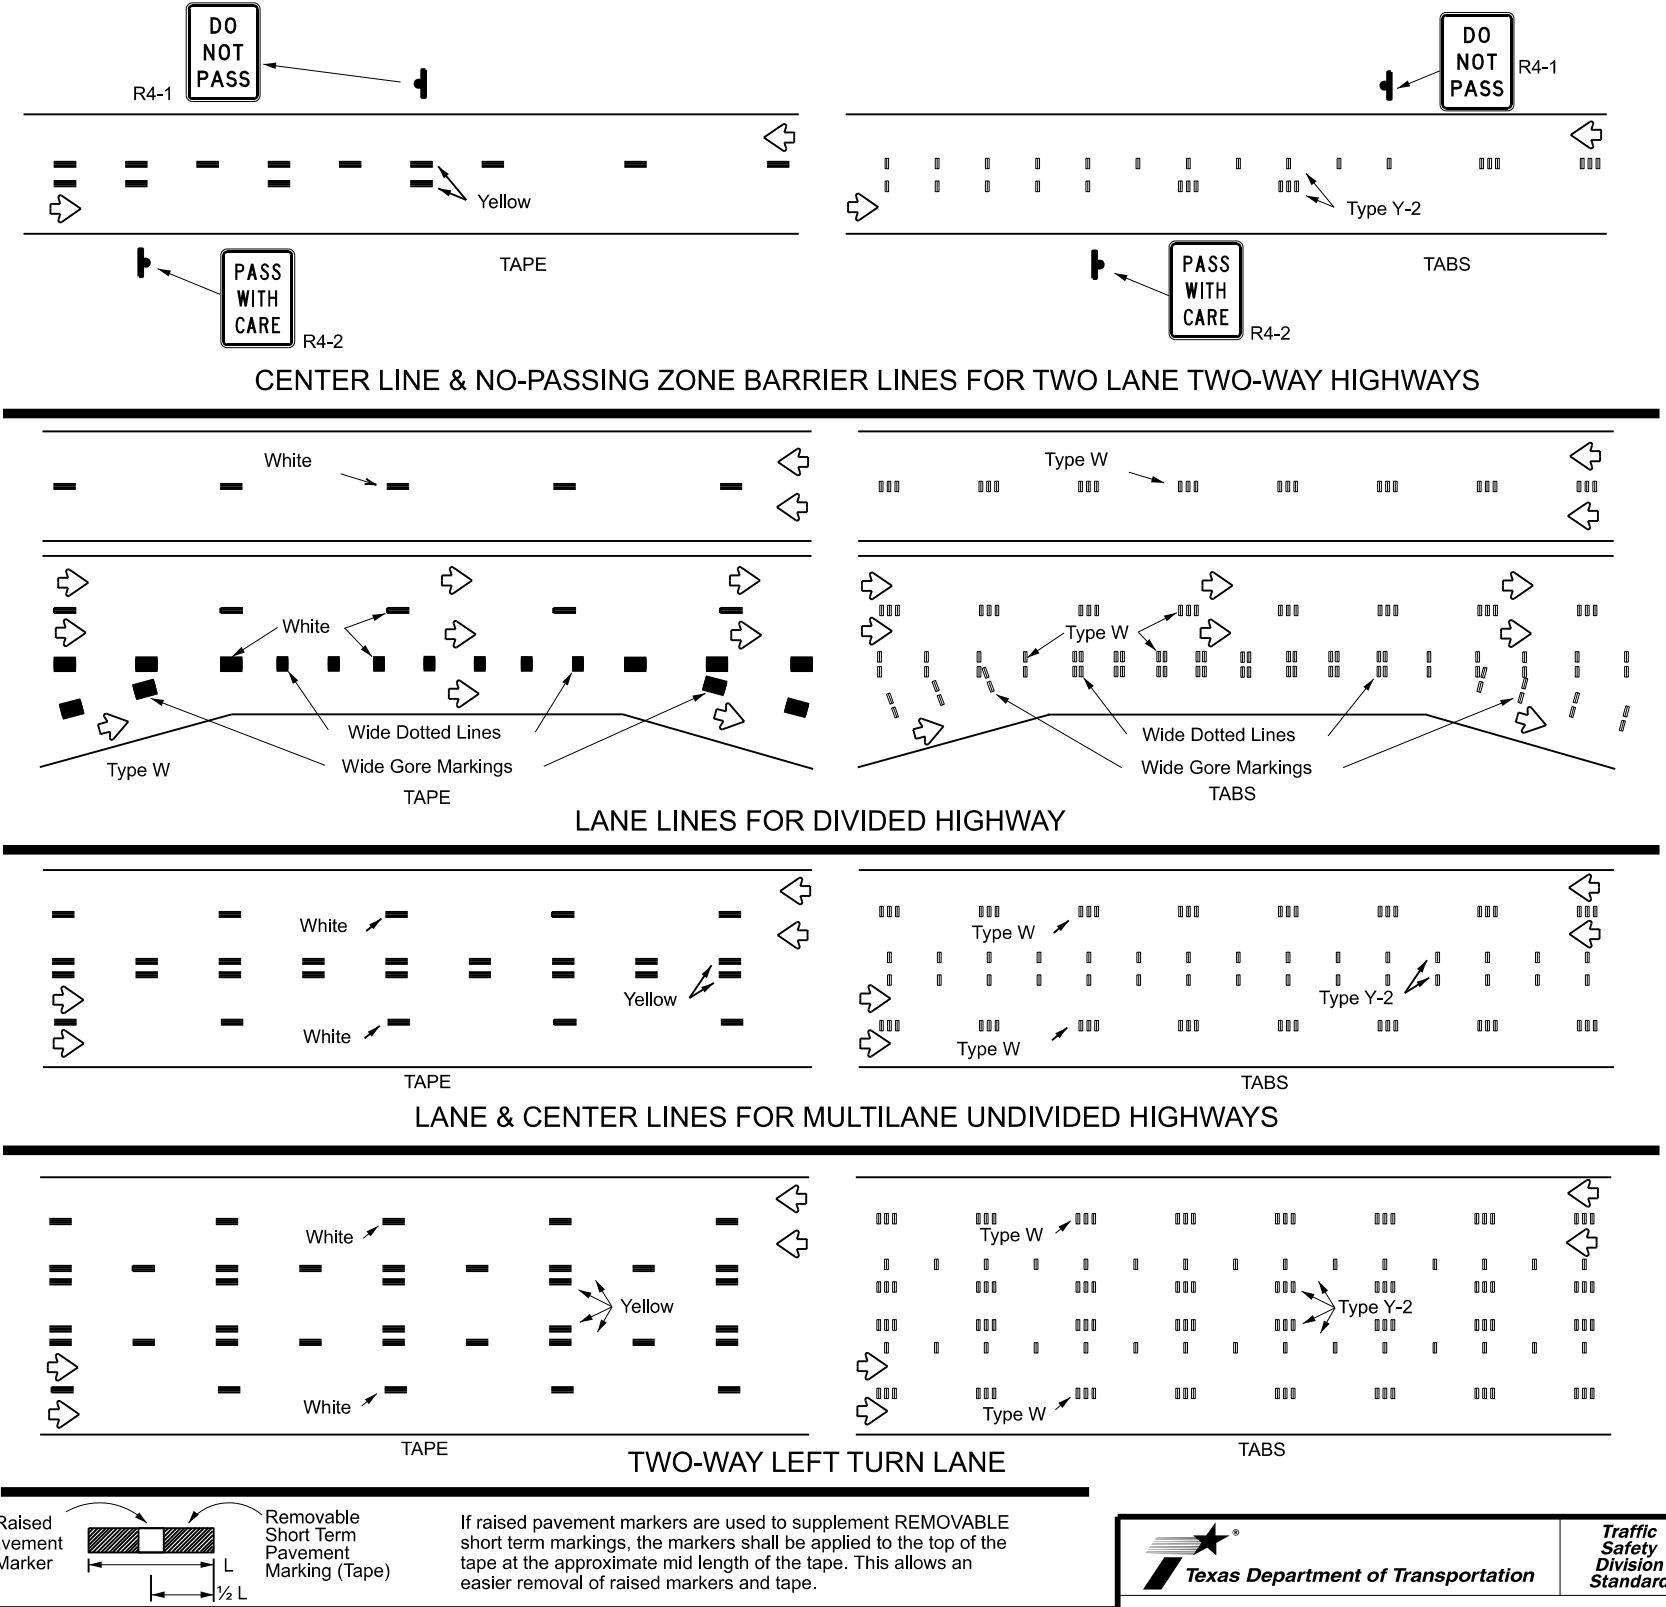

If raised pavement markers are used to supplement REMOVABLE short term markings, the markers shall be applied to the top of the tape at the approximate mid length of the tape. This allows an easier removal of raised markers and tape.

PREFABRICATED PAVEMENT MARKINGS

- Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.

- Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240 "Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Construction-Grade Prefabricated Pavement Markings."

RAISED PAVEMENT MARKERS

- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

- DMSs referenced above can be found along with embedded links to their respective MPLs at the following website:

http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm





WORK ZONE SHORT TERM PAVEMENT MARKINGS

WZ(STPM)-23

FILE:	wzstpm-23.dgn	DW:	CK:	CK:
© TxDOT	February 2023	CONT	SECT	JOB
		0914	05	137
4-92	7-13	DIST	COUNTY	SHEET NO.
1-97	2-23	AUS	WILLIAMSON	19
3-03				

DATE: 10/6/2023 5:26:52 PM
 FILE: pw://txdot.projectwiseonline.com:txdot14/Documents/14 - AUS/Design Projects/091405137/4 - Design/Plan Set/3. Roadway/CR0126_RMV_PL.dgn

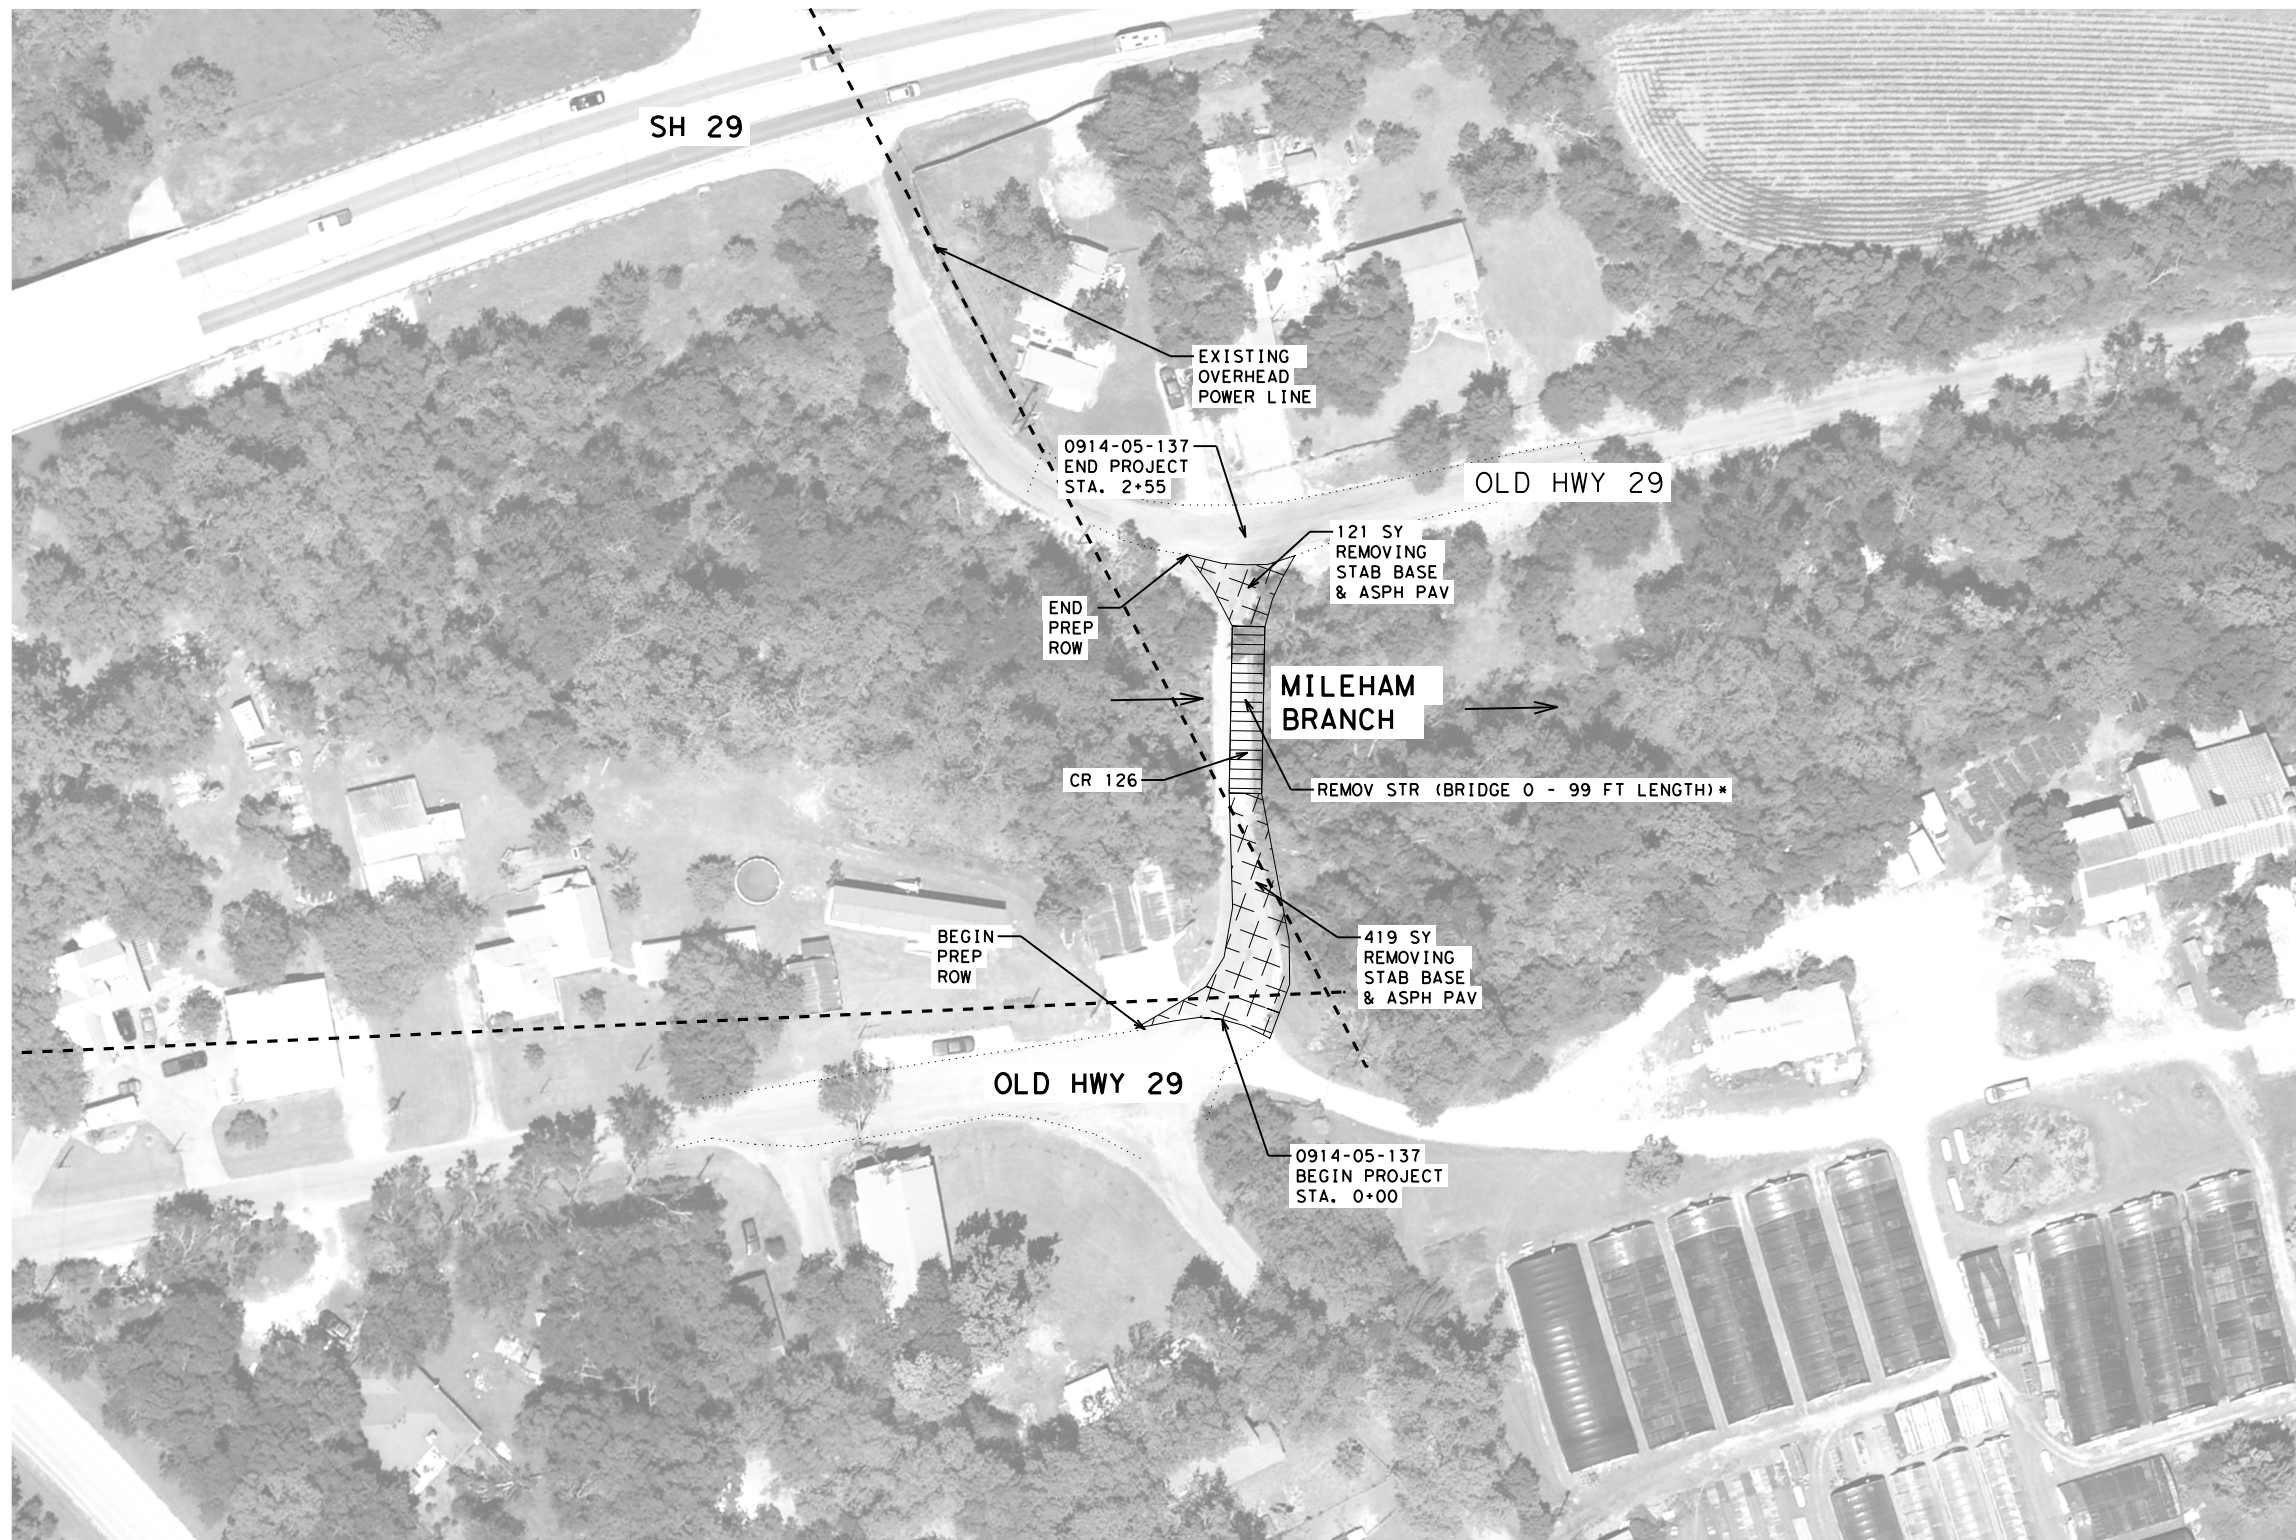

DocuSigned by:
Amro Gaber
 DAD0168DA9D443D...

LEGEND

- EXIST OVERHEAD POWER LINE
- [Cross-hatched box] REMOVAL BRIDGE
- [Cross-hatched box] REMOVAL PAVEMENT

- * CONTRACTOR ENCOURAGED TO VIEW SITE TO VIEW RESTRICTIONS SUCH AS SMALL WORK AREA, LIVE UTILITIES, ETC.
- * REMOVAL OF STRUCTURE INCLUDES REMOVAL OF ABUTMENT AND INTERIOR BENTS, AS WELL AS GRADING OF REMOVED ABUTMENT AREA TO MATCH ADJACENT NATURAL GROUND.



**Austin District
 Central Design**




**CR 126 AT MILEHAM BR
 REMOVAL PLAN
 LAYOUT**

SHEET 1 OF 1

© 2023	CONT	SECT	JOB	HIGHWAY
DS: CK:	0914	05	137	CR 126
DW: CK:	DIST		COUNTY	SHEET NO.
	AUS		WILLIAMSON	21

DATE: 9/26/2023 12:40:07 AM
 FILE: D:\txdot\project\wiseon\line.com\TXDOT4\Documents\14 - AUS\Design Projects\091405137\4 - Design\Plan Set\7. - Bridge\CR0126_BRG_LAYOUT.dgn

District 14 County 246 Cont. Sec. AA04.87 Structure 001 Route CR 126

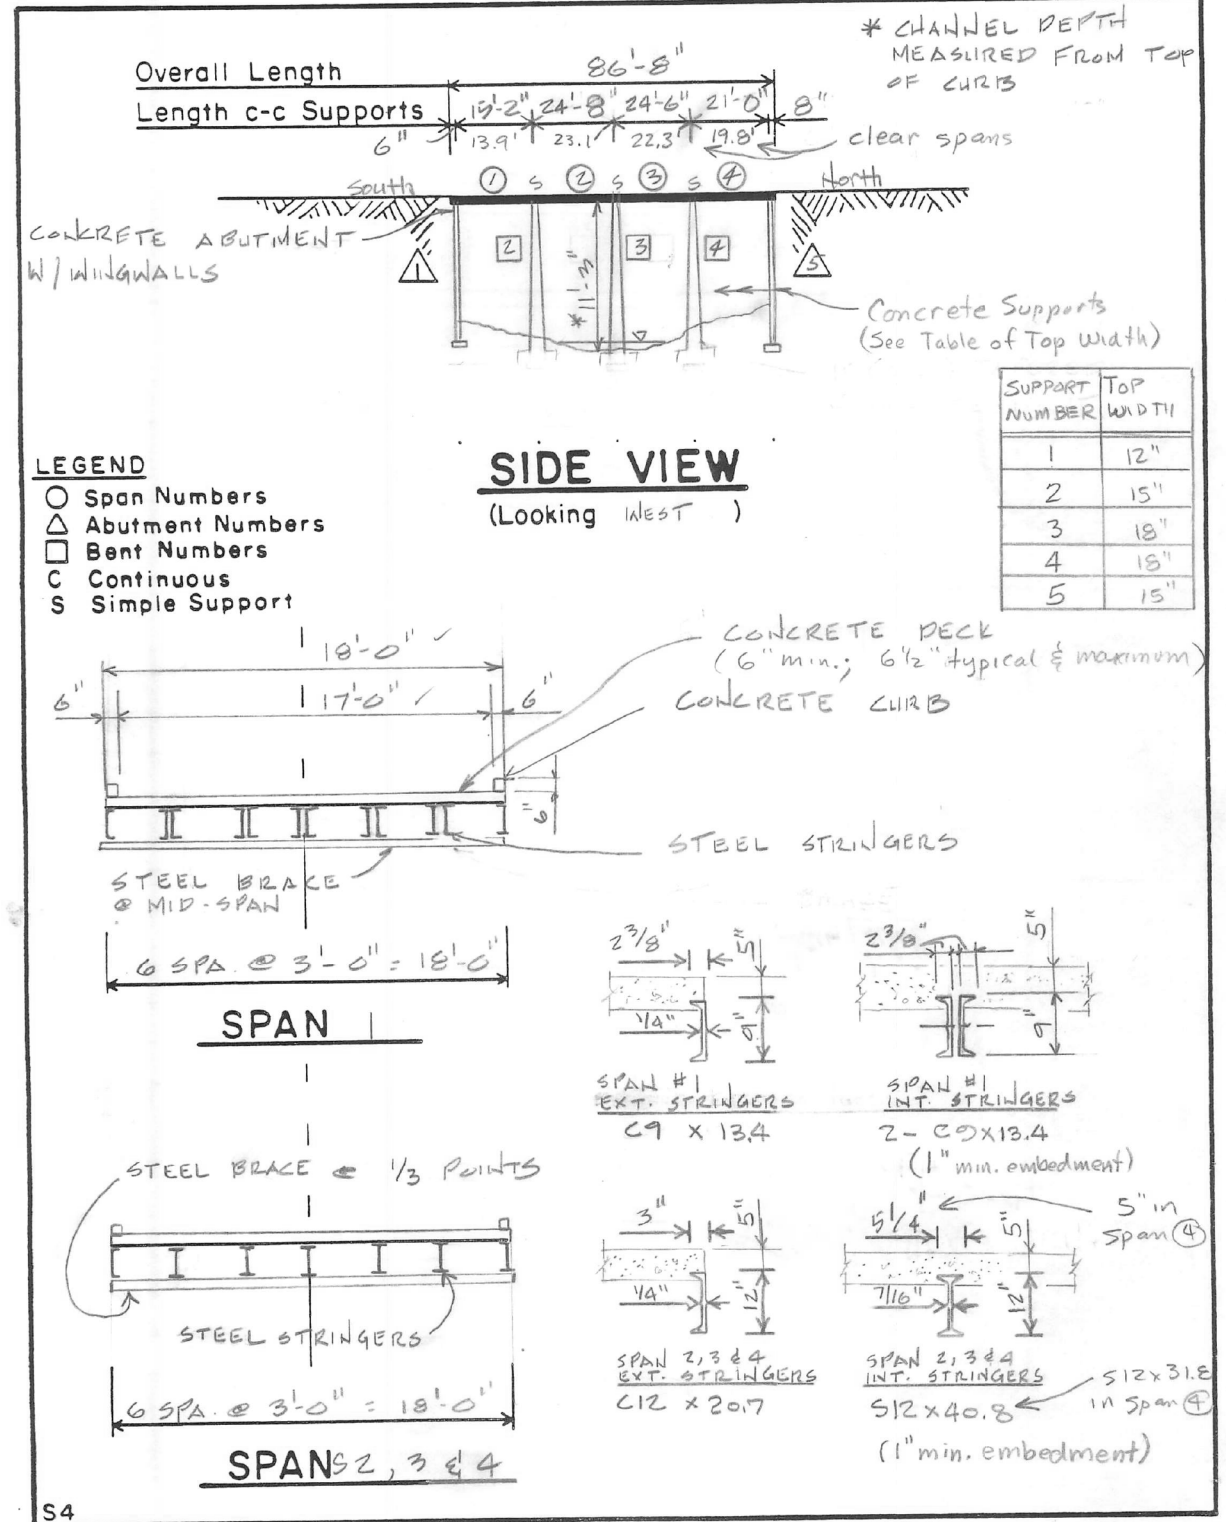

S4
 © 1987 HOWELL ENGINEER & CO. Sheet No. 2 of 2 Sheets

Existing Layout



Superstructure with damaged rails



Typical Abutment



View of Interior Bent and Superstructure from below




Three Interior Bents

EXISTING NBI: 14-246-AA04-87-001
 PROPOSED NBI: N/A
 DESIGN SPEED = N/A MPH
 EXIST ADT (2022) = 100 VPD
 PROP ADT (2032) = 0 VPD
 TERRAIN: ROLLING
 ROADWAY FUNCTIONAL CLASSIFICATION: LOCAL STREET

Note: Bridge Removal must be in accordance with Item 496

DocuSigned by:
Amro Gaber
 DAD0168DA9D443D...
 9/28/2023



**Austin District
 Central Design**

Texas Department of Transportation


**CR 126 AT MILEHAM BR.
 BRIDGE DEMOLITION
 LAYOUT**

SHEET 01 OF 01


DS:	CK:	CONT	SECT	JOB	HIGHWAY
		0914	05	137	CR 126
DW:	CK:	DIST	COUNTY	SHEET NO.	
		AUS	WILLIAMSON	22	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units.


DATE: 9/26/2023 12:40:28 AM
 FILE: p:\t\dot\project\seon\line.com\1\0014\Documents\14 - AUS\Standards\Statewide Standards\19\19.dgn

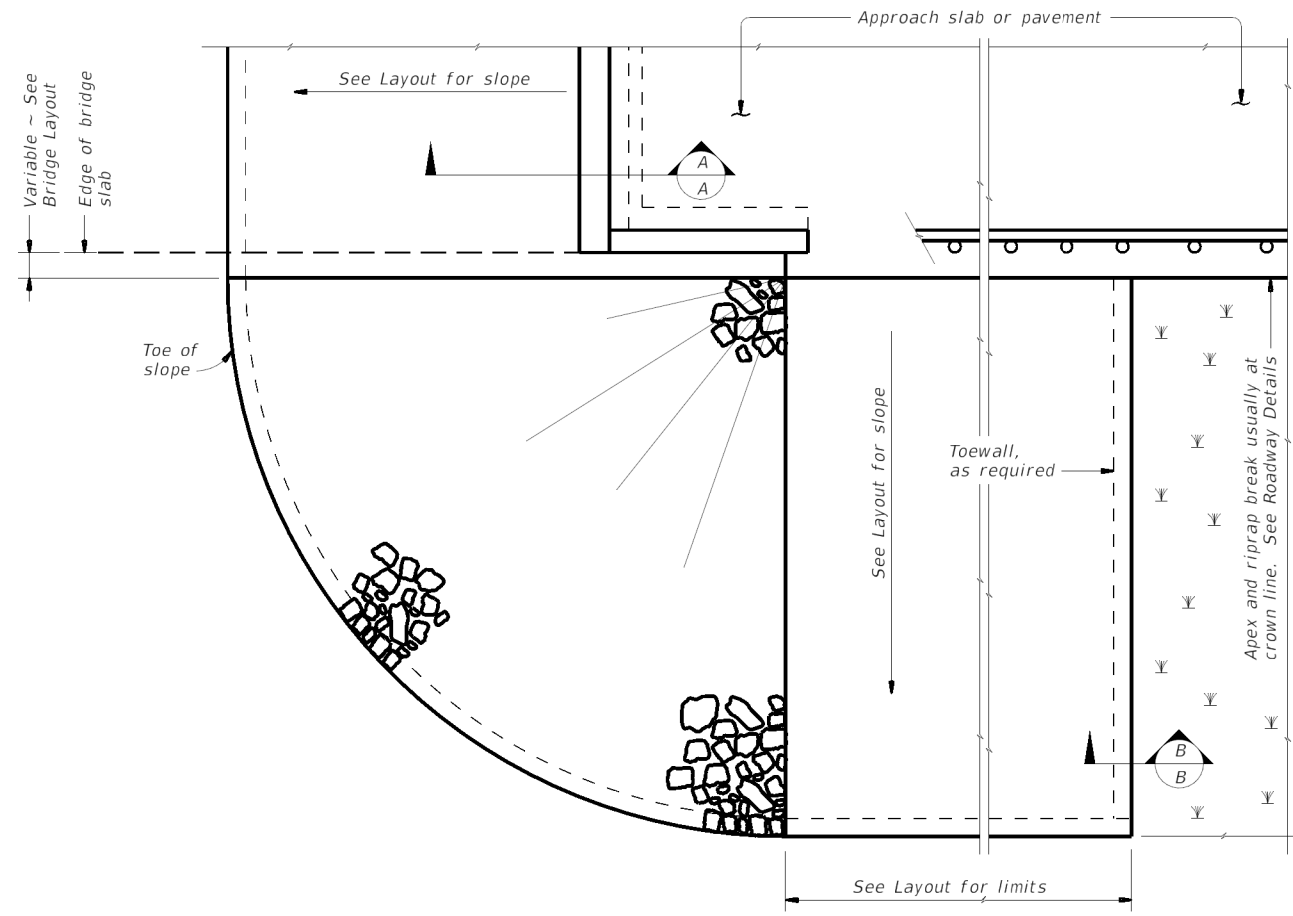


PLAN

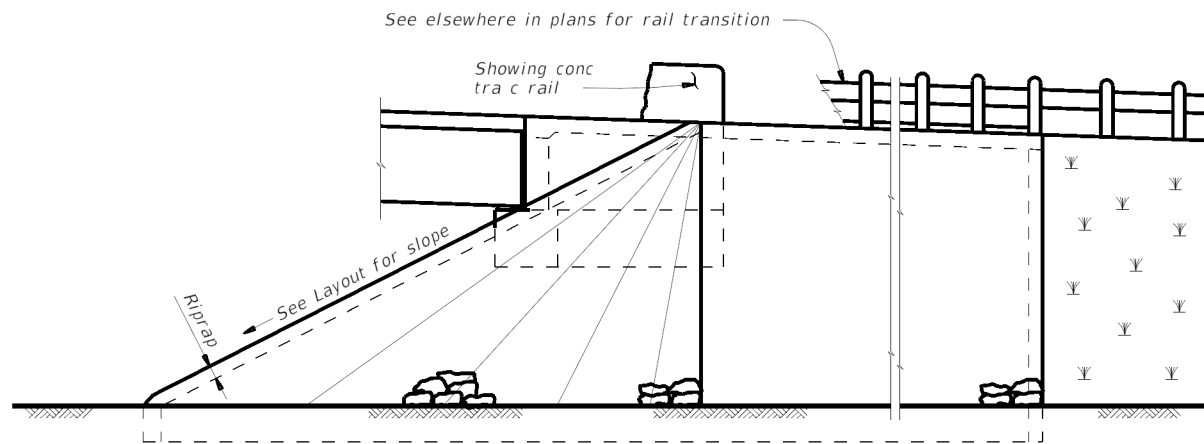

ELEVATION

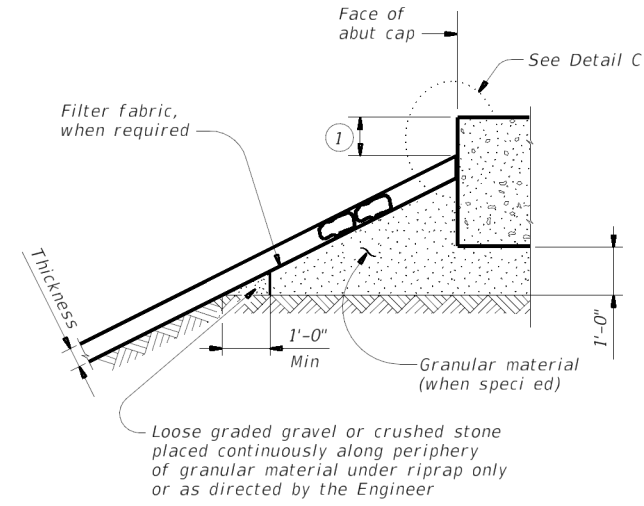


SECTION A-A AT CAP

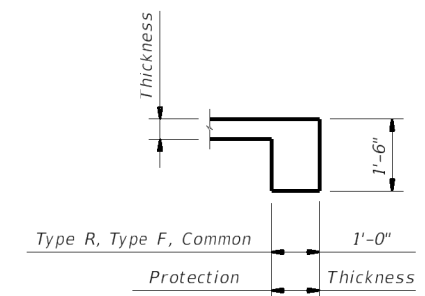

SECTION B-B

Provide toewall when shoulder drain is located adjacent to limits of stone riprap. Omit toewall when thickness of protection riprap is greater than 18".

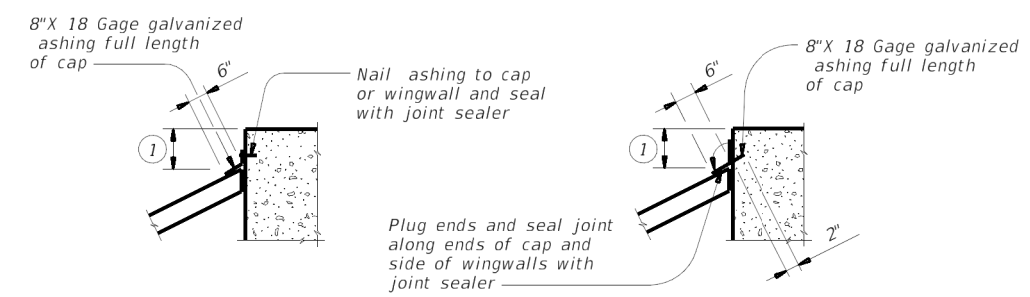

CAP OPTION A

CAP OPTION B

DETAIL C

1 Top of cap to top of riprap dimension varies as directed by the Engineer. Provide 9" Min for beam/slab type bridges. Provide 1'-6" for slab span, box beam, or slab beam bridges.

GENERAL NOTES:
 Refer to Item 432, "Riprap" for stone size and gradation, and construction details. See Layout for limits and thickness of riprap specified.
 See elsewhere in plans for locations and details of shoulder drains.

SHEET 1 OF 2

		Bridge Division Standard	
<h1>STONE RIPRAP</h1>			
<h2>SRR</h2>			
FILE: srrstd1-19.dgn	DN: AES	CK: JGD	DW: BWH
©TxDOT April 2019	CONT: 0914	SECT: 05	JOB: 137
REVISIONS	0914	05	137
DIST: AUS	COUNTY: WILLIAMSON	SHEET NO. 23	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information provided.

DATE: 9/26/2023 12:40:34 AM
 FILE: p:\t\dot\project\online.com\1\0014\Documents\14 - AUS\Standards\Stone\Standards\SR\SR14-19.dgn

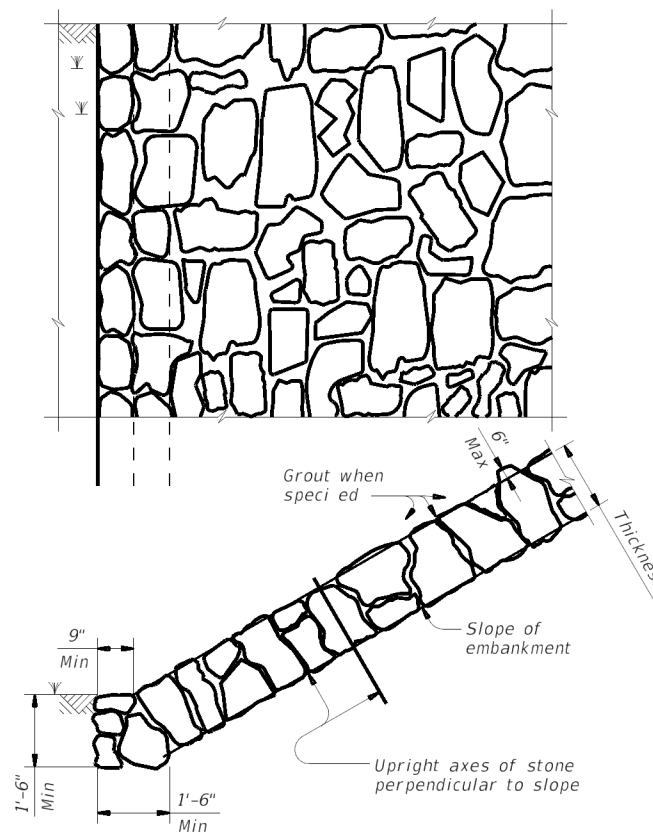


FIGURE 1 ~ TYPE R STONE RIPRAP
dry or grouted

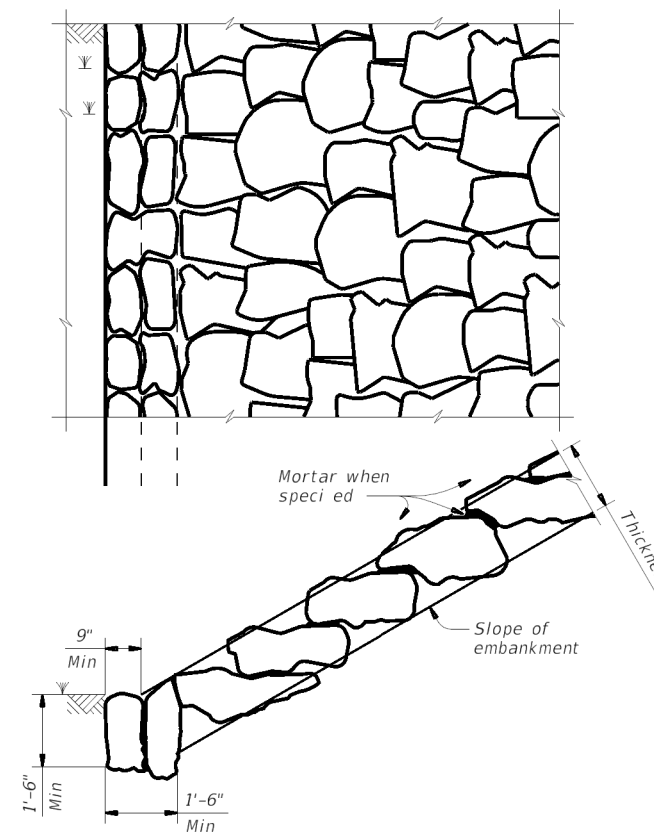


FIGURE 2 ~ TYPE F STONE RIPRAP
dry or mortared

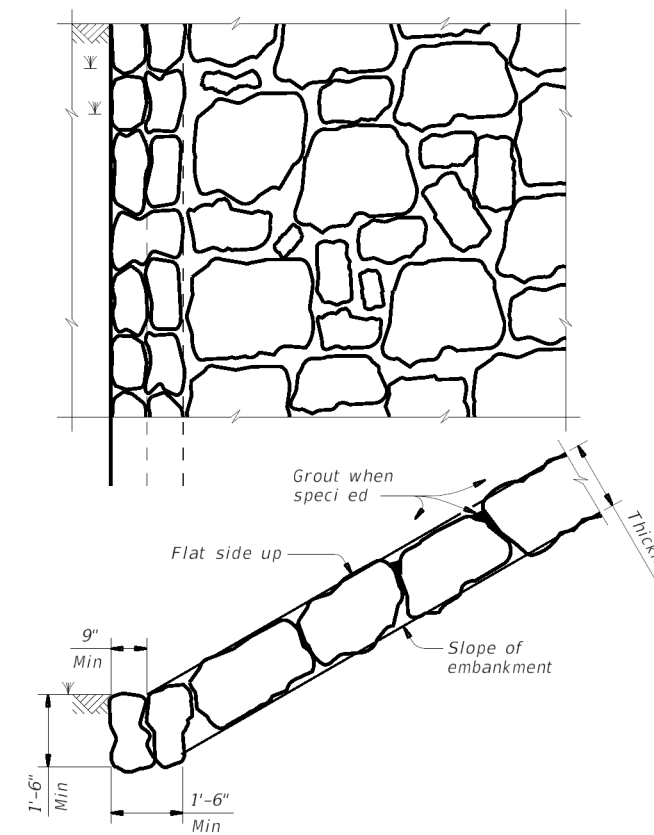


FIGURE 3 ~ TYPE F STONE RIPRAP
grouted

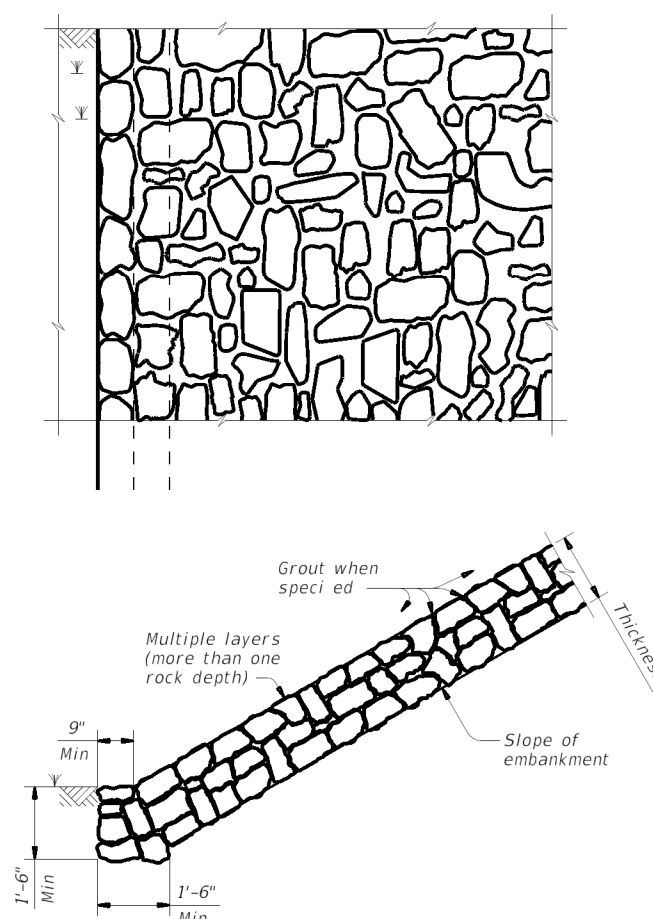


FIGURE 4 ~ COMMON STONE RIPRAP
dry or grouted


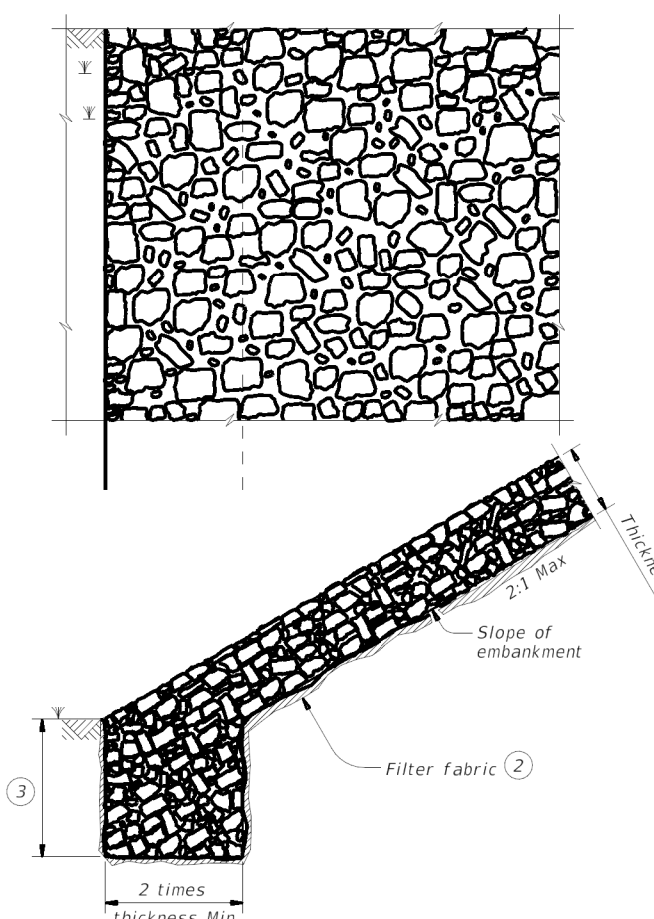


FIGURE 5 ~ PROTECTION STONE RIPRAP

- ② Provide bedding material instead of filter fabric if shown elsewhere in plans. See layout for thickness of bedding material.
- ③ Minimum toe depth is the larger of the maximum scour depth or 2 times the riprap thickness.
- ④ "Y" and Height need to be defined. See layout or detail sheet for values if this option is used.
- ⑤ List Stone Protection as size (XX inch) and thickness (YY inch) on the layout.
Example: Riprap (Stone Protection) XX inch, Thickness = YY inch.

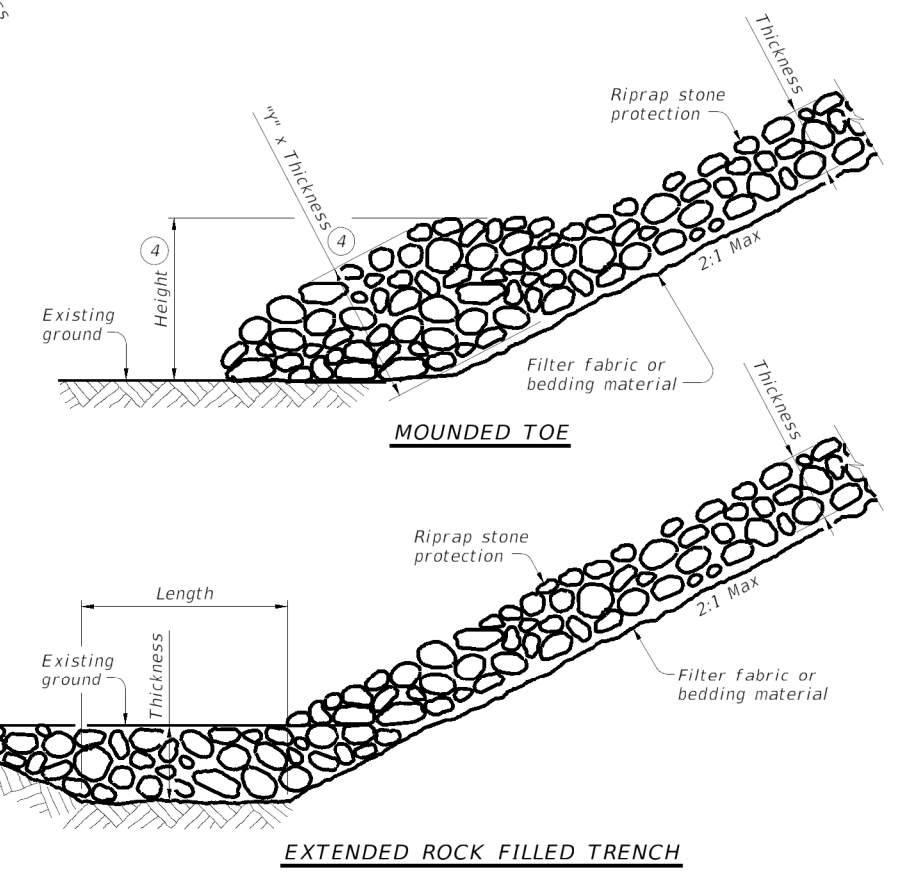


PROTECTION STONE RIPRAP TOE OPTIONS

SHEET 2 OF 2

		Bridge Division Standard	
<h2>STONE RIPRAP</h2>			
<h3>SRR</h3>			
FILE: srrstde1-19.dgn	DN: AES	CK: JGD	DW: BWH
CONT: April 2019	SECT: 05	JOB: 137	HIGHWAY: CR 126
REVISIONS		DIST: AUS	COUNTY: WILLIAMSON
		SHEET NO. 24	

DATE: 9/27/2023 2:21:41 PM
 FILE: P:\txdot\project\wiseonline.com\txdot\Documents\14 - AUS\Design Projects\091405137\4 - Design\Plan Set\5 - Drainage\CR0126_DRG_DA_HYDROLOGY.dgn

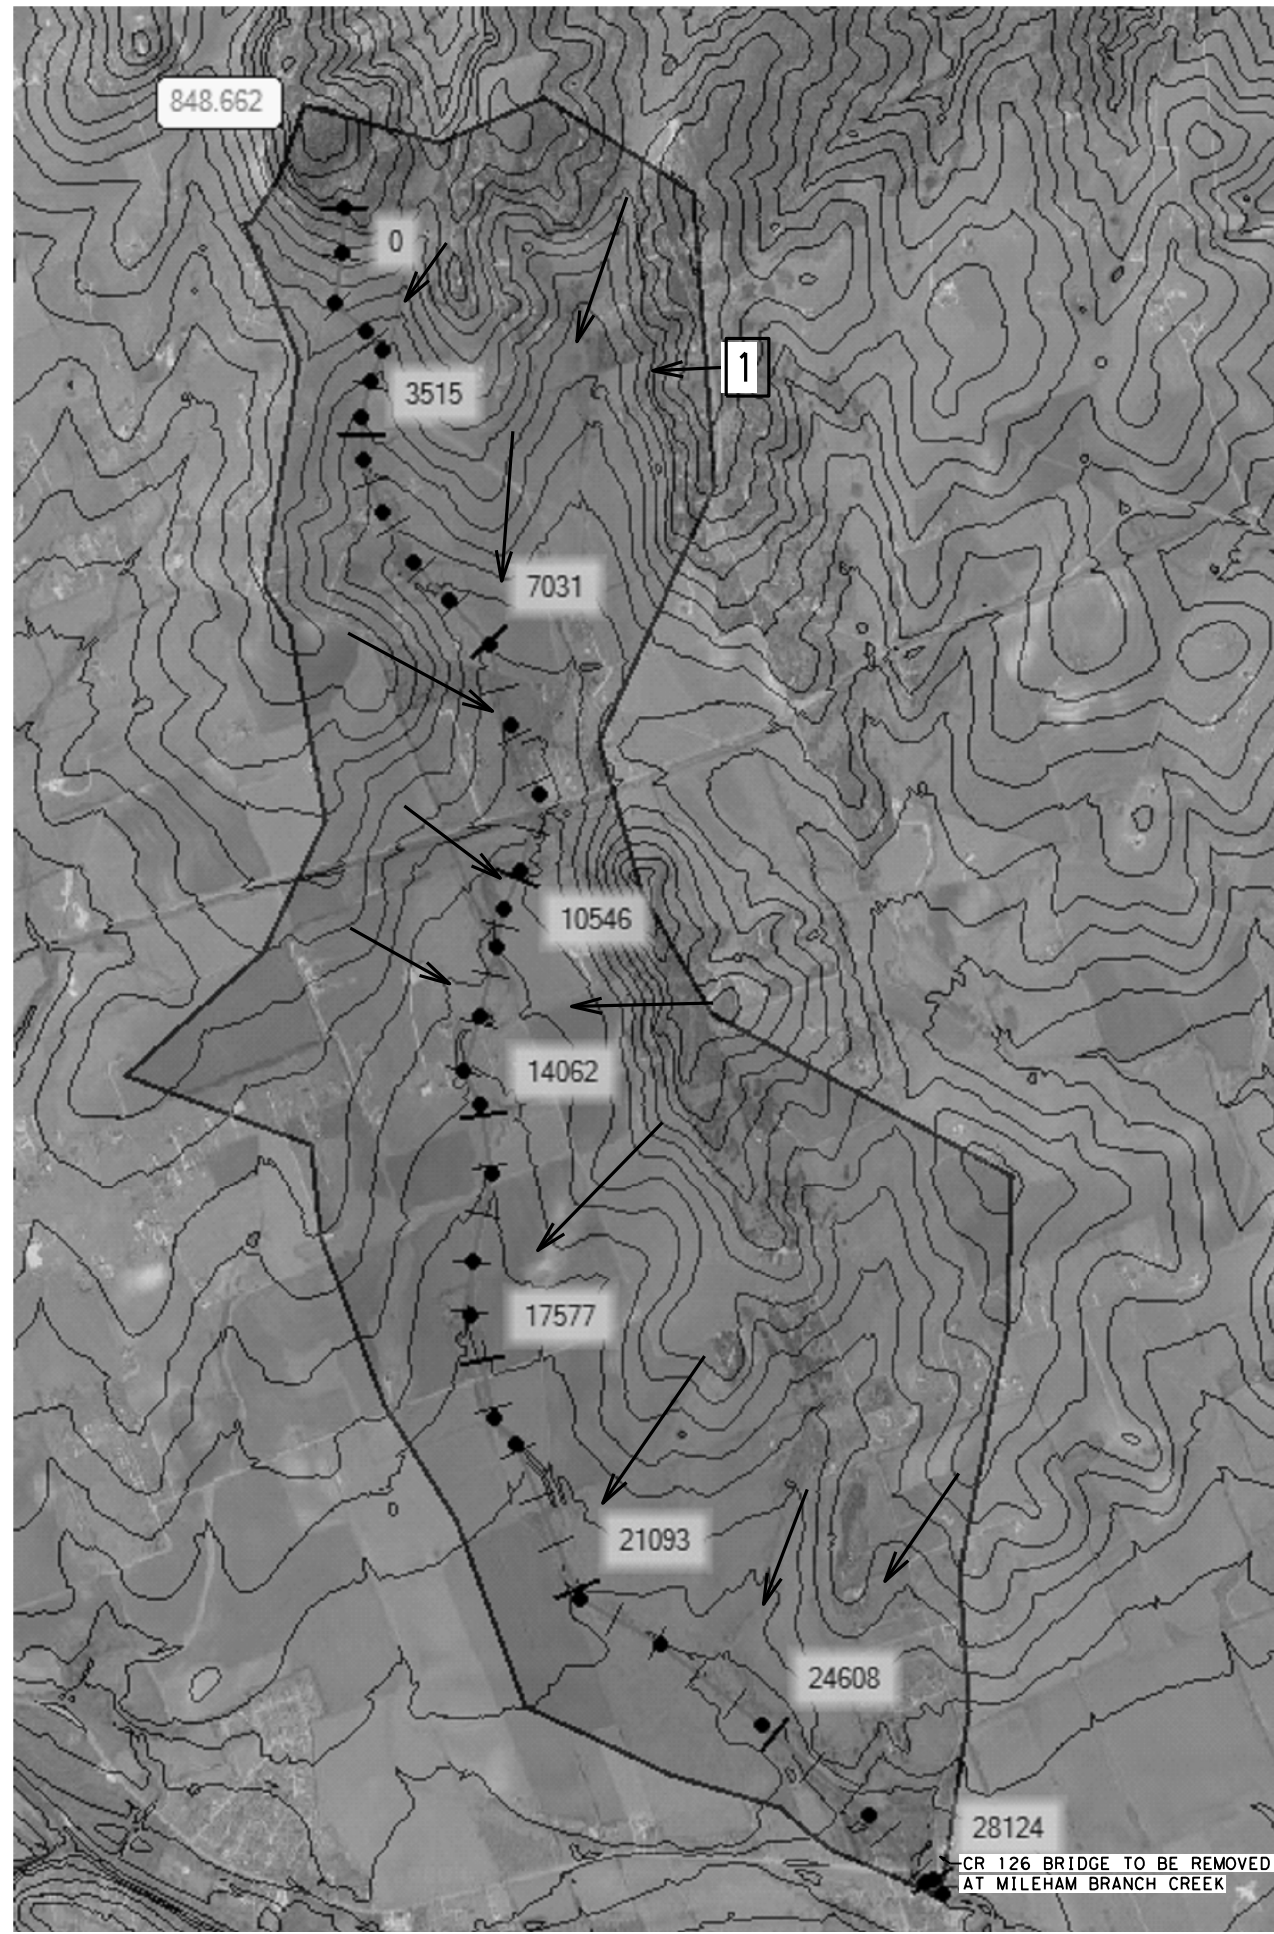

LEGEND	
	DRAINAGE AREA
	TIME OF CONCENTRATION
	FLOW

Drainage Area	Bridge Station	Tc(min)	Curve Number	Area	Hydrograph Method 24 Hr Rainfall Depth(Inch)					Q(CFS)				
					5 yr	10 yr	25 yr	50 yr	100 yr	5 yr	10 yr	25 yr	50 yr	100 yr
1	2+00	98	80	5.67	5.16	6.32	8.07	9.58	11.3	3106	4095.3	5575.3	6814.6	8187.2

NOAA ATLAS-14 RAINFALL DATA (INCHES)					
Duration	5-year	10-year	25-year	50-year	100-year
5 Minutes	0.645	0.759	0.92	1.05	1.19
15 Minutes	1.29	1.51	1.83	2.09	2.36
1 Hour	2.37	2.79	3.39	3.86	4.36
2 Hours	2.96	3.55	4.41	5.13	5.92
3 Hours	3.32	4.02	5.08	5.97	6.98
6 Hours	3.94	4.82	6.18	7.34	8.68
12 Hours	4.53	5.56	7.13	8.48	10
1 Day	5.16	6.32	8.07	9.58	11.3

TIME OF CONCENTRATION							
DRAINAGE AREA	Bridge Station	Dimensionless retardness Coef(N)	Overland Flow Length	Overland Flow Slope	Channel Flow Length	Channel Flow Slope	Total Tc(MIN)
1	2+00	0.5	1144	0.03	27,883	0.009	163

DocuSigned by:

 DAD0168DA9D443D...
 9/28/2023



NOTES:

1. RUNOFF CALCULATED USING HEC-HMS HYDROGRAPH METHOD
2. TC CALCULATED USING KERBY-KIRPICH METHOD FOR DRAINAGE AREA 1
3. CURVE NUMBERS ARE ADJUSTED.
4. ATLAS 14 PRECIPITATION WAS USED IN THE HYDROLOGICAL ANALYSIS OF DRAINAGE AREA 1.
5. BRIDGE AT MILEHAM BRANCH CREEK IS LOCATED WITHIN FEMA SPECIAL FLOOD HAZARD AREA ZONE "A" ACCORDING TO FEMA FIRM 48491C0320F DATED DECEMBER 20, 2019
6. H&H FILES WERE SENT TO THE LOCAL FLOODPLAIN ADMINISTRATOR

**Austin District
Central Design**




Texas Department of Transportation

**CR 126 AT MILEHAM BR.
EXTERNAL
DRAINAGE AREA MAP
AND HYDROLOGY SHEET**

SHEET 1 OF 1

© 2023	CONT	SECT	JOB	HIGHWAY
DS: CK:	0914	05	137	CR 126
DW: CR:	DIST		COUNTY	SHEET NO.
	AUS		WILLIAMSON	25

DATE: 9/27/2023 3:57:24 PM
 FILE: P:\txdot\project\wiseonline.com\txdot\Documents\14 - AUS\Design Projects\091405137\4 - Design\Plan Set\5. Drainage\CR126_DRG_DA_HYDRAULICS

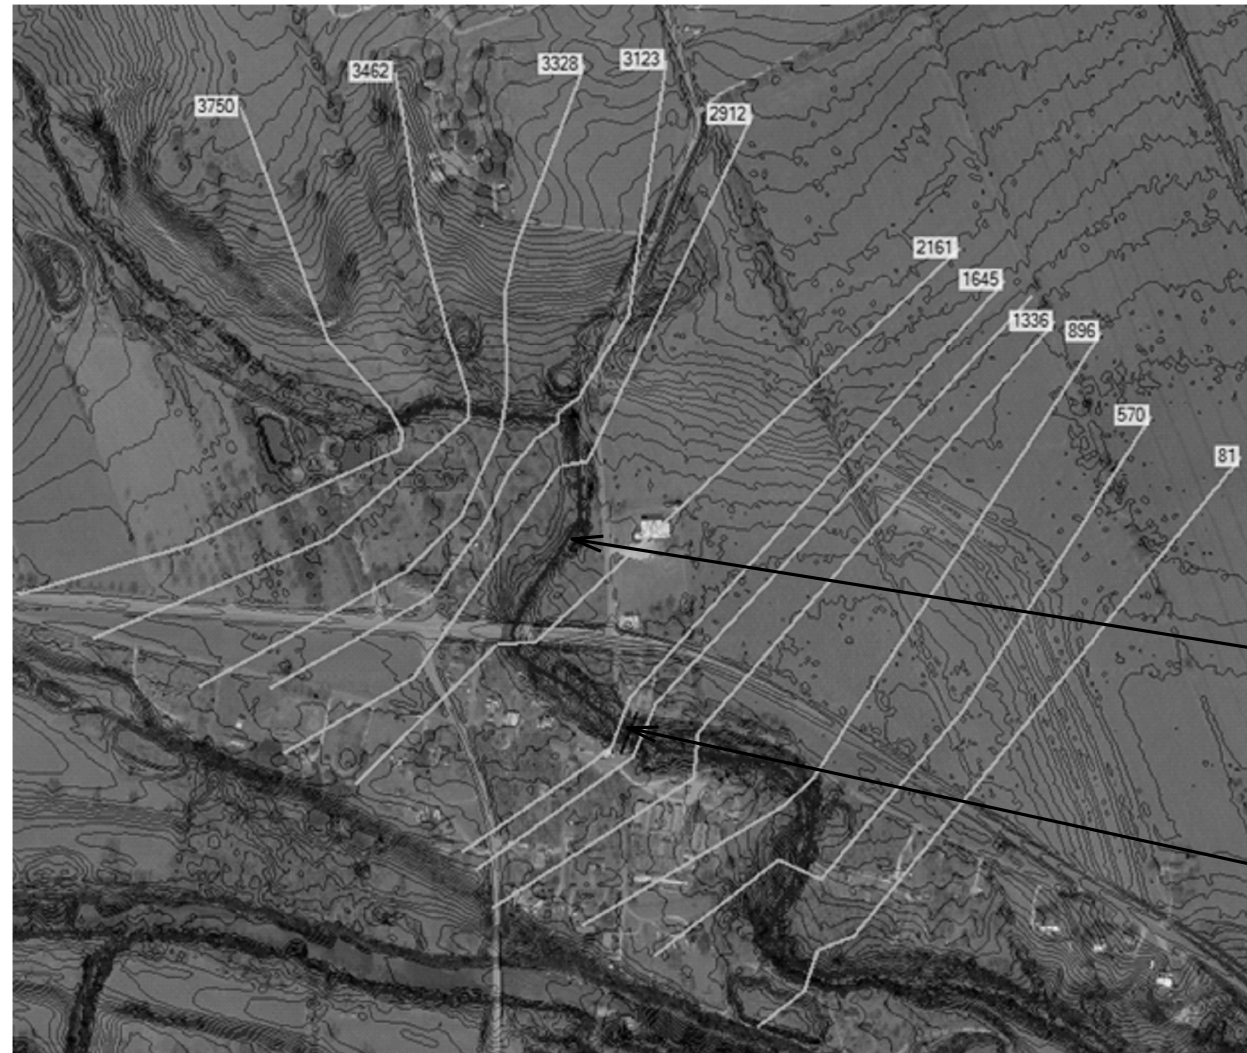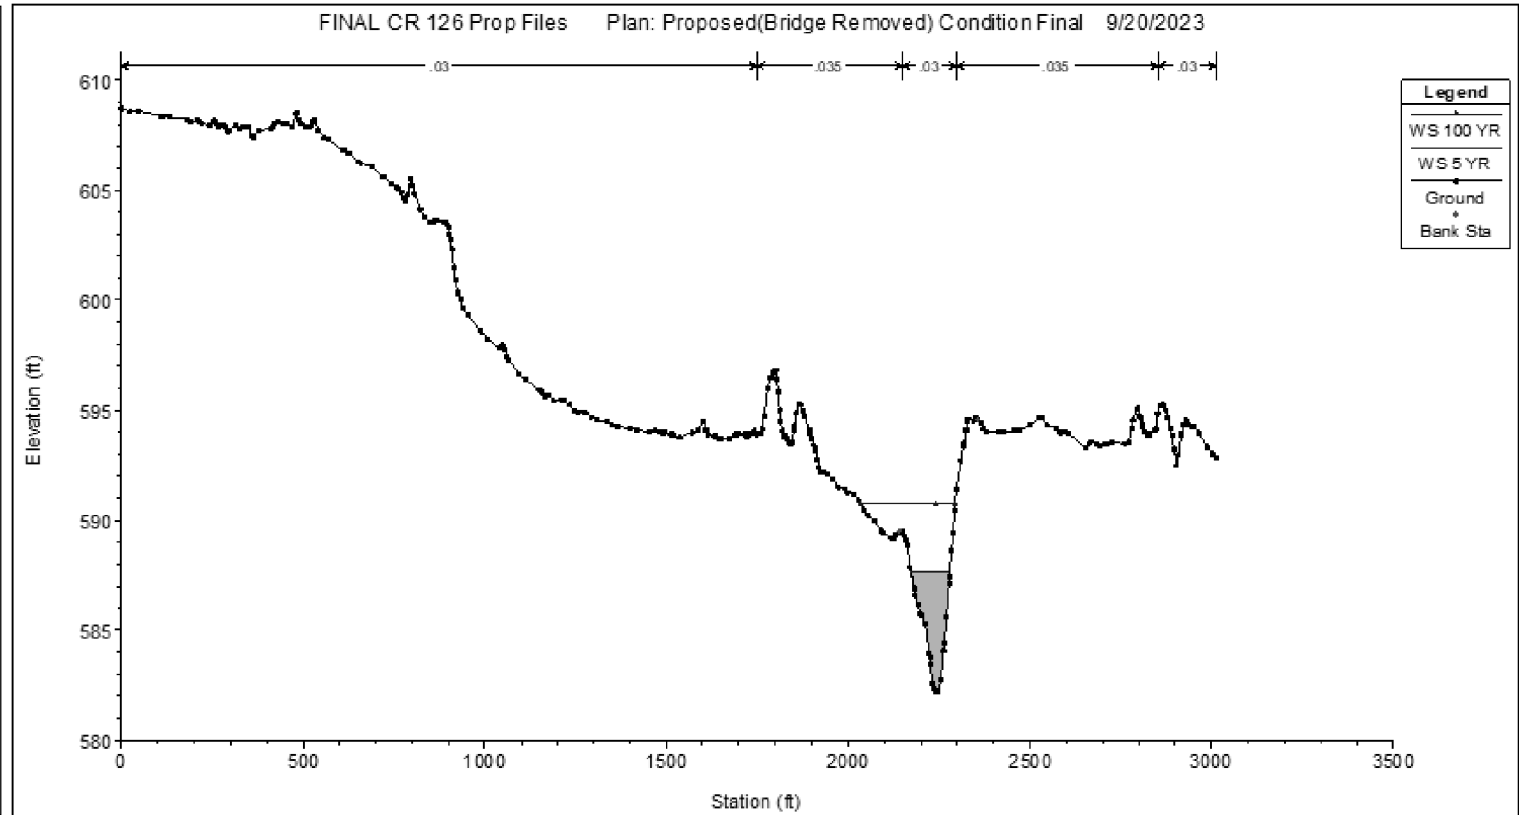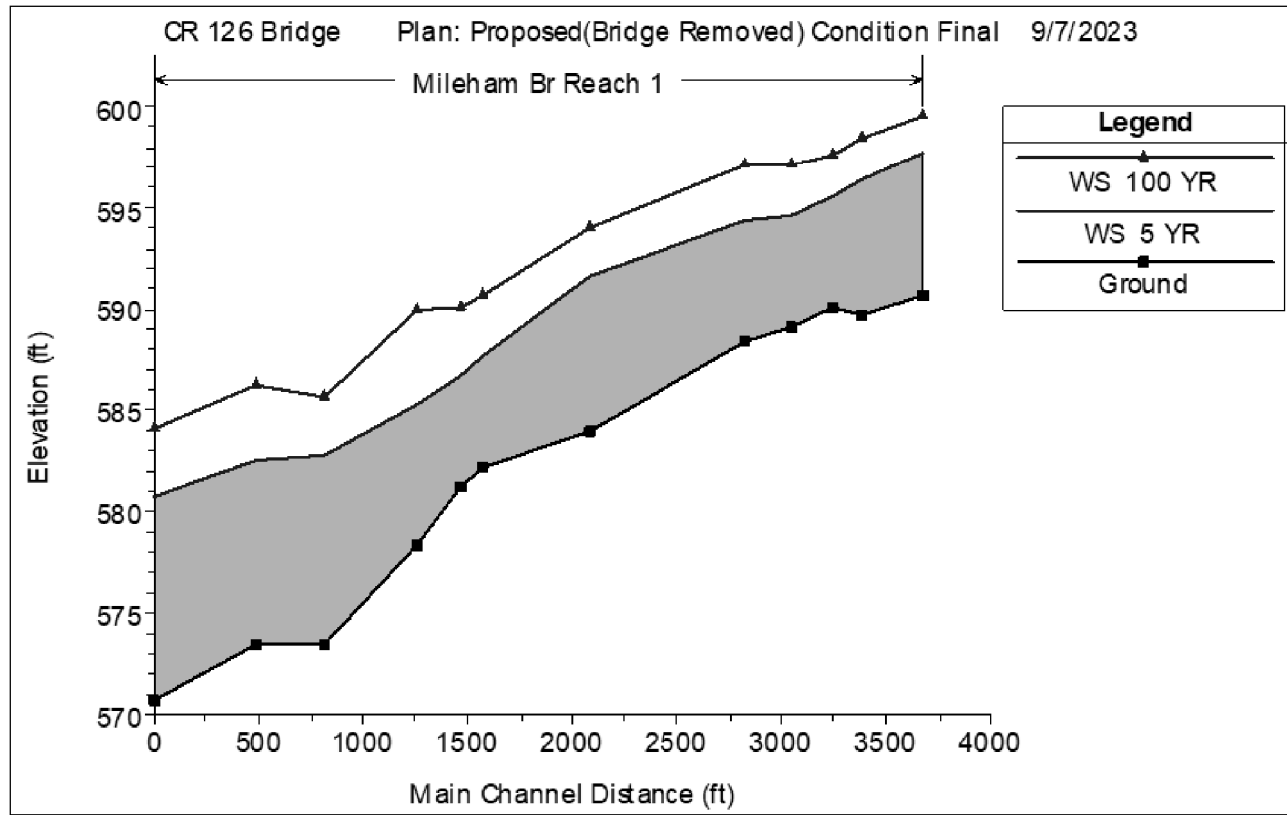

MILEHAM CREEK

PROPOSED CR 126 BRIDGE REMOVAL

- NOTES:
1. TOPOGRAPHY BASED ON TNRAS LIDAR DATA FROM AUGUST 2017.
 2. SINCE WE ARE DEMOLISHING THE EXISTING BRIDGE, THERE'S NO BRIDGE SHOWN IN THE CROSS SECTION PLOT.
 3. SEE SHEET 2 OF 2 FOR HYDRAULIC DATA.
 4. THE REMOVED BRIDGE WAS BETWEEN RIVER STATION 1645 (UPSTREAM) AND 1551 (DOWNSTREAM).
 5. PLANS AND HYDROLOGIC AND HYDRAULIC FILES WERE SENT DAVID ZWERNEMANN, PE, CFM. ON 9/28/2023.
 6. MODEL BOUNDARY CONDITIONS SET TO NORMAL DEPTH WITH A SLOPE OF 0.003953.

DocuSigned by:
Amro Gaber
 DAD0168DA9D443D...
 9/28/2023



**Austin District
 Central Design**

Texas Department of Transportation



**CR 126 AT MILEHAM BR.
 HYDRAULIC
 DATA SHEET**

SHEET 1 OF 2

© 2023	CONT	SECT	JOB	HIGHWAY
DS: CK:	0914	05	137	CR 126
DW: CK:	DIST		COUNTY	SHEET NO.
	AUS		WILLIAMSON	26

Reach	River Sta	Profile	Plan	Q Total (cfs)	Min Ch El (ft)	W.S. Elev (ft)	Crit W.S. (ft)	E.G. Elev (ft)	F.G. Slope (ft/ft)	Vel Chnl (ft/s)	Flow Area (sq ft)	Top Width (ft)	Froude #	Chl
Reach 1	3750	5 YR	Existing CR 126 Final	3106	590.62	597.78		598.39	0.002537	7.12	644.1	365.25	0.57	
Reach 1	3750	5 YR	Proposed(Bridge Removal)	3106	590.62	597.79		598.39	0.002527	7.11	645.58	368.81	0.57	
Reach 1	3750	10 YR	Existing CR 126 Final	4095.3	590.62	598.31		598.92	0.002435	7.47	874.53	502.53	0.57	
Reach 1	3750	10 YR	Proposed(Bridge Removal)	4095.3	590.62	598.31		598.92	0.002435	7.47	874.53	502.53	0.57	
Reach 1	3750	25 YR	Existing CR 126 Final	5575.3	590.62	598.95	598.49	599.49	0.002156	7.56	1361.91	1110.83	0.54	
Reach 1	3750	25 YR	Proposed(Bridge Removal)	5575.3	590.62	598.95	598.49	599.49	0.002156	7.56	1361.91	1110.83	0.54	
Reach 1	3750	50 YR	Existing CR 126 Final	6814.6	590.62	599.24	599.01	599.77	0.002194	7.87	1742.33	1523.53	0.55	
Reach 1	3750	50 YR	Proposed(Bridge Removal)	6814.6	590.62	599.24	599.01	599.77	0.002194	7.87	1742.33	1523.53	0.55	
Reach 1	3750	100 YR	Existing CR 126 Final	8187.2	590.62	599.51	599.37	600.01	0.002125	7.96	2223.92	1947.64	0.55	
Reach 1	3750	100 YR	Proposed(Bridge Removal)	8187.2	590.62	599.51	599.37	600.01	0.002125	7.96	2223.92	1947.64	0.55	
Reach 1	3462	5 YR	Existing CR 126 Final	3106	589.68	596.42	596.27	597.34	0.005315	9.12	493.43	283.75	0.76	
Reach 1	3462	5 YR	Proposed(Bridge Removal)	3106	589.68	596.41	596.27	597.34	0.005359	9.15	491.51	282.74	0.76	
Reach 1	3462	10 YR	Existing CR 126 Final	4095.3	589.68	596.93	596.93	597.89	0.005233	9.71	654.21	344.98	0.77	
Reach 1	3462	10 YR	Proposed(Bridge Removal)	4095.3	589.68	596.93	596.93	597.89	0.005233	9.71	654.21	344.98	0.77	
Reach 1	3462	25 YR	Existing CR 126 Final	5575.3	589.68	597.43	597.43	598.49	0.005547	10.65	846.59	407.63	0.8	
Reach 1	3462	25 YR	Proposed(Bridge Removal)	5575.3	589.68	597.43	597.43	598.49	0.005547	10.65	846.59	407.63	0.8	
Reach 1	3462	50 YR	Existing CR 126 Final	6814.6	589.68	598.12	598.12	598.91	0.003978	9.76	1263.4	1016.08	0.69	
Reach 1	3462	50 YR	Proposed(Bridge Removal)	6814.6	589.68	598.12	598.12	598.91	0.003978	9.76	1263.4	1016.08	0.69	
Reach 1	3462	100 YR	Existing CR 126 Final	8187.2	589.68	598.45	598.45	599.18	0.003784	9.84	1635.6	1253.78	0.68	
Reach 1	3462	100 YR	Proposed(Bridge Removal)	8187.2	589.68	598.45	598.45	599.18	0.003784	9.84	1635.6	1253.78	0.68	
Reach 1	3328	5 YR	Existing CR 126 Final	3106	590.05	595.52	595.39	596.63	0.004967	9.8	453.61	283.72	0.8	
Reach 1	3328	5 YR	Proposed(Bridge Removal)	3106	590.05	595.52	595.39	596.63	0.004938	9.78	455.29	284.39	0.79	
Reach 1	3328	10 YR	Existing CR 126 Final	4095.3	590.05	596.4	596.4	597.18	0.003322	8.99	845.23	610.7	0.67	
Reach 1	3328	10 YR	Proposed(Bridge Removal)	4095.3	590.05	596.4	596.4	597.18	0.003322	8.99	845.23	610.7	0.67	
Reach 1	3328	25 YR	Existing CR 126 Final	5575.3	590.05	596.89	596.89	597.65	0.003306	9.48	1163.22	689.86	0.68	
Reach 1	3328	25 YR	Proposed(Bridge Removal)	5575.3	590.05	596.89	596.89	597.65	0.003306	9.48	1163.22	689.86	0.68	
Reach 1	3328	50 YR	Existing CR 126 Final	6814.6	590.05	597.03	597.03	597.98	0.004153	10.78	1268.74	835.35	0.76	
Reach 1	3328	50 YR	Proposed(Bridge Removal)	6814.6	590.05	597.03	597.03	597.98	0.004153	10.78	1268.74	835.35	0.76	
Reach 1	3328	100 YR	Existing CR 126 Final	8187.2	590.05	597.57	597.57	598.26	0.003119	9.88	1840.48	1210.87	0.67	
Reach 1	3328	100 YR	Proposed(Bridge Removal)	8187.2	590.05	597.57	597.57	598.26	0.003119	9.88	1840.48	1210.87	0.67	
Reach 1	3123	5 YR	Existing CR 126 Final	3106	589.17	594.6	594.56	595.62	0.004604	9.07	494.64	320.07	0.76	
Reach 1	3123	5 YR	Proposed(Bridge Removal)	3106	589.17	594.58	594.56	595.62	0.0047	9.14	488.81	314.52	0.76	
Reach 1	3123	10 YR	Existing CR 126 Final	4095.3	589.17	595.36	595.36	596.12	0.003257	8.47	853.98	533.32	0.65	
Reach 1	3123	10 YR	Proposed(Bridge Removal)	4095.3	589.17	595.36	595.36	596.12	0.003257	8.47	853.98	533.32	0.65	
Reach 1	3123	25 YR	Existing CR 126 Final	5575.3	589.17	595.99	595.65	596.66	0.002881	8.6	1250.4	716.22	0.63	
Reach 1	3123	25 YR	Proposed(Bridge Removal)	5575.3	589.17	595.88	595.65	596.63	0.003211	8.97	1175.62	684.21	0.66	
Reach 1	3123	50 YR	Existing CR 126 Final	6814.6	589.17	596.63		597.11	0.002034	7.74	1744.25	829.46	0.54	
Reach 1	3123	50 YR	Proposed(Bridge Removal)	6814.6	589.17	596.63		597.11	0.002034	7.74	1744.25	829.46	0.54	
Reach 1	3123	100 YR	Existing CR 126 Final	8187.2	589.17	597.17		597.55	0.001613	7.27	2227.26	979.53	0.48	
Reach 1	3123	100 YR	Proposed(Bridge Removal)	8187.2	589.17	597.17		597.55	0.001614	7.28	2226.42	979.24	0.48	
Reach 1	2912	5 YR	Existing CR 126 Final	3106	588.43	594.52		594.84	0.001764	5.51	866.04	567.41	0.49	
Reach 1	2912	5 YR	Proposed(Bridge Removal)	3106	588.43	594.42	594.08	594.79	0.00205	5.87	809.38	557.79	0.53	
Reach 1	2912	10 YR	Existing CR 126 Final	4095.3	588.43	595.16		595.4	0.001278	5.04	1236.19	610.12	0.43	
Reach 1	2912	10 YR	Proposed(Bridge Removal)	4095.3	588.43	595.07		595.34	0.001427	5.28	1184.12	588.3	0.46	
Reach 1	2912	25 YR	Existing CR 126 Final	5575.3	588.43	595.99		596.2	0.00095	4.74	1778.83	680.9	0.37	
Reach 1	2912	25 YR	Proposed(Bridge Removal)	5575.3	588.43	595.9		596.12	0.001039	4.91	1715.99	668.43	0.39	
Reach 1	2912	50 YR	Existing CR 126 Final	6814.6	588.43	596.56		596.76	0.000859	4.77	2198.81	867.74	0.36	
Reach 1	2912	50 YR	Proposed(Bridge Removal)	6814.6	588.43	596.56		596.76	0.000859	4.77	2198.81	867.74	0.36	
Reach 1	2912	100 YR	Existing CR 126 Final	8187.2	588.43	597.09		597.27	0.000752	4.69	2779.01	1372.85	0.33	
Reach 1	2912	100 YR	Proposed(Bridge Removal)	8187.2	588.43	597.09		597.27	0.000753	4.69	2777.75	1371.47	0.33	
Reach 1	2161	5 YR	Existing CR 126 Final	3106	584.04	590.89	590.71	592.29	0.007863	9.98	340.38	99.21	0.84	
Reach 1	2161	5 YR	Proposed(Bridge Removal)	3106	584.04	591.59		592.53	0.004604	8.2	411.22	103.75	0.65	
Reach 1	2161	10 YR	Existing CR 126 Final	4095.3	584.04	591.38	591.38	593.21	0.009259	11.41	390.49	102.31	0.92	
Reach 1	2161	10 YR	Proposed(Bridge Removal)	4095.3	584.04	592.32		593.45	0.0049	8.99	489.64	120.85	0.68	
Reach 1	2161	25 YR	Existing CR 126 Final	5575.3	584.04	592.43	592.43	594.42	0.008466	11.92	503.6	129.11	0.9	
Reach 1	2161	25 YR	Proposed(Bridge Removal)	5575.3	584.04	593.23	592.43	594.53	0.005121	9.82	631.79	187.58	0.71	
Reach 1	2161	50 YR	Existing CR 126 Final	6814.6	584.04	593.34	593.34	595.17	0.007143	11.68	652.83	195.25	0.84	
Reach 1	2161	50 YR	Proposed(Bridge Removal)	6814.6	584.04	593.34	593.34	595.17	0.007143	11.68	652.83	195.25	0.84	
Reach 1	2161	100 YR	Existing CR 126 Final	8187.2	584.04	593.99	593.99	595.83	0.006794	11.99	794.86	245.14	0.83	
Reach 1	2161	100 YR	Proposed(Bridge Removal)	8187.2	584.04	593.99	593.99	595.83	0.006794	11.99	794.86	245.14	0.83	
Reach 1	1645	5 YR	Existing CR 126 Final	3106	582.17	589.19	587.69	589.81	0.002759	6.3	493.21	129.9	0.57	
Reach 1	1645	5 YR	Proposed(Bridge Removal)	3106	582.17	587.69	587.69	589.19	0.00936	9.83	315.95	106.69	1.01	
Reach 1	1645	10 YR	Existing CR 126 Final	4095.3	582.17	590.4	588.37	590.93	0.00193	5.97	740.36	245.43	0.5	
Reach 1	1645	10 YR	Proposed(Bridge Removal)	4095.3	582.17	588.37	588.37	590.06	0.00893	10.44	392.23	116.79	1	
Reach 1	1645	25 YR	Existing CR 126 Final	5575.3	582.17	591.78	589.33	592.26	0.001323	5.77	1137.62	339.72	0.43	
Reach 1	1645	25 YR	Proposed(Bridge Removal)	5575.3	582.17	589.33	589.33	591.18	0.008226	10.91	513.03	158	0.98	
Reach 1	1645	50 YR	Existing CR 126 Final	6814.6	582.17	590.13	590.13	592.8	0.001466	6.36	1298.42	382.57	0.46	
Reach 1	1645	50 YR	Proposed(Bridge Removal)	6814.6	582.17	590.62	590.13	591.93	0.004489	9.35	797.65	256.16	0.76	
Reach 1	1645	100 YR	Existing CR 126 Final	8187.2	582.17	590.72	590.71	593.28	0.001618	6.93	1449.83	393.67	0.49	
Reach 1	1645	100 YR	Proposed(Bridge Removal)	8187.2	582.17	590.72	590.71	592.51	0.006006	10.94	823.76	260.51	0.89	
Reach 1	1600		Bridge											
Reach 1	1551	5 YR	Existing CR 126 Final	3106	581.21	586.71	586.71	588.28	0.008802	10.07	309.78	101.53	0.99	
Reach 1	1551	5 YR	Proposed(Bridge Removal)	3106	581.21	586.71	586.71	588.28	0.008802	10.07	309.78	101.53	0.99	
Reach 1	1551	10 YR	Existing CR 126 Final	4095.3	581.21	587.41	587.41	589.21	0.008127	10.81	384.45	111.65	0.98	
Reach 1	1551	10 YR	Proposed(Bridge Removal)	4095.3	581.21	587.41	587.41	589.21	0.008127	10.81	384.45	111.65	0.98	
Reach 1	1551	25 YR	Existing CR 126 Final	5575.3	581.21	588.32	588.32	590.4	0.007478	11.67	492.08	125.14	0.97	
Reach 1	1551	25 YR	Proposed(Bridge Removal)	5575.3	581.21	588.32	588.32	590.4	0.007478	11.67	492.08	125.14	0.97	
Reach 1	1551	50 YR	Existing CR 126 Final	6814.6	581.21	588.86	588.86	591.28	0.007744	12.61	563.24	144.19	1	
Reach 1	1551	50 YR	Proposed(Bridge Removal)	6814.6	581.21	588.86	588.86	591.28	0.007744	12.61	563.24	144.19	1	
Reach 1	1551	100 YR	Existing CR 126 Final	8187.2	581.21	590.05	590.05	591.97	0.005168	11.5	8			

DATE: 11/28/2023 2:03:20 PM
 FILE: pw://txdot.projectwiseonline.com:txdot14/Documents/14 - AUS/Design Projects/091405137/4 - Design/Plan Set/8. Traffic/Plan Set/8. Traffic/CR0126_SIGNING_LAYOUT.dgn

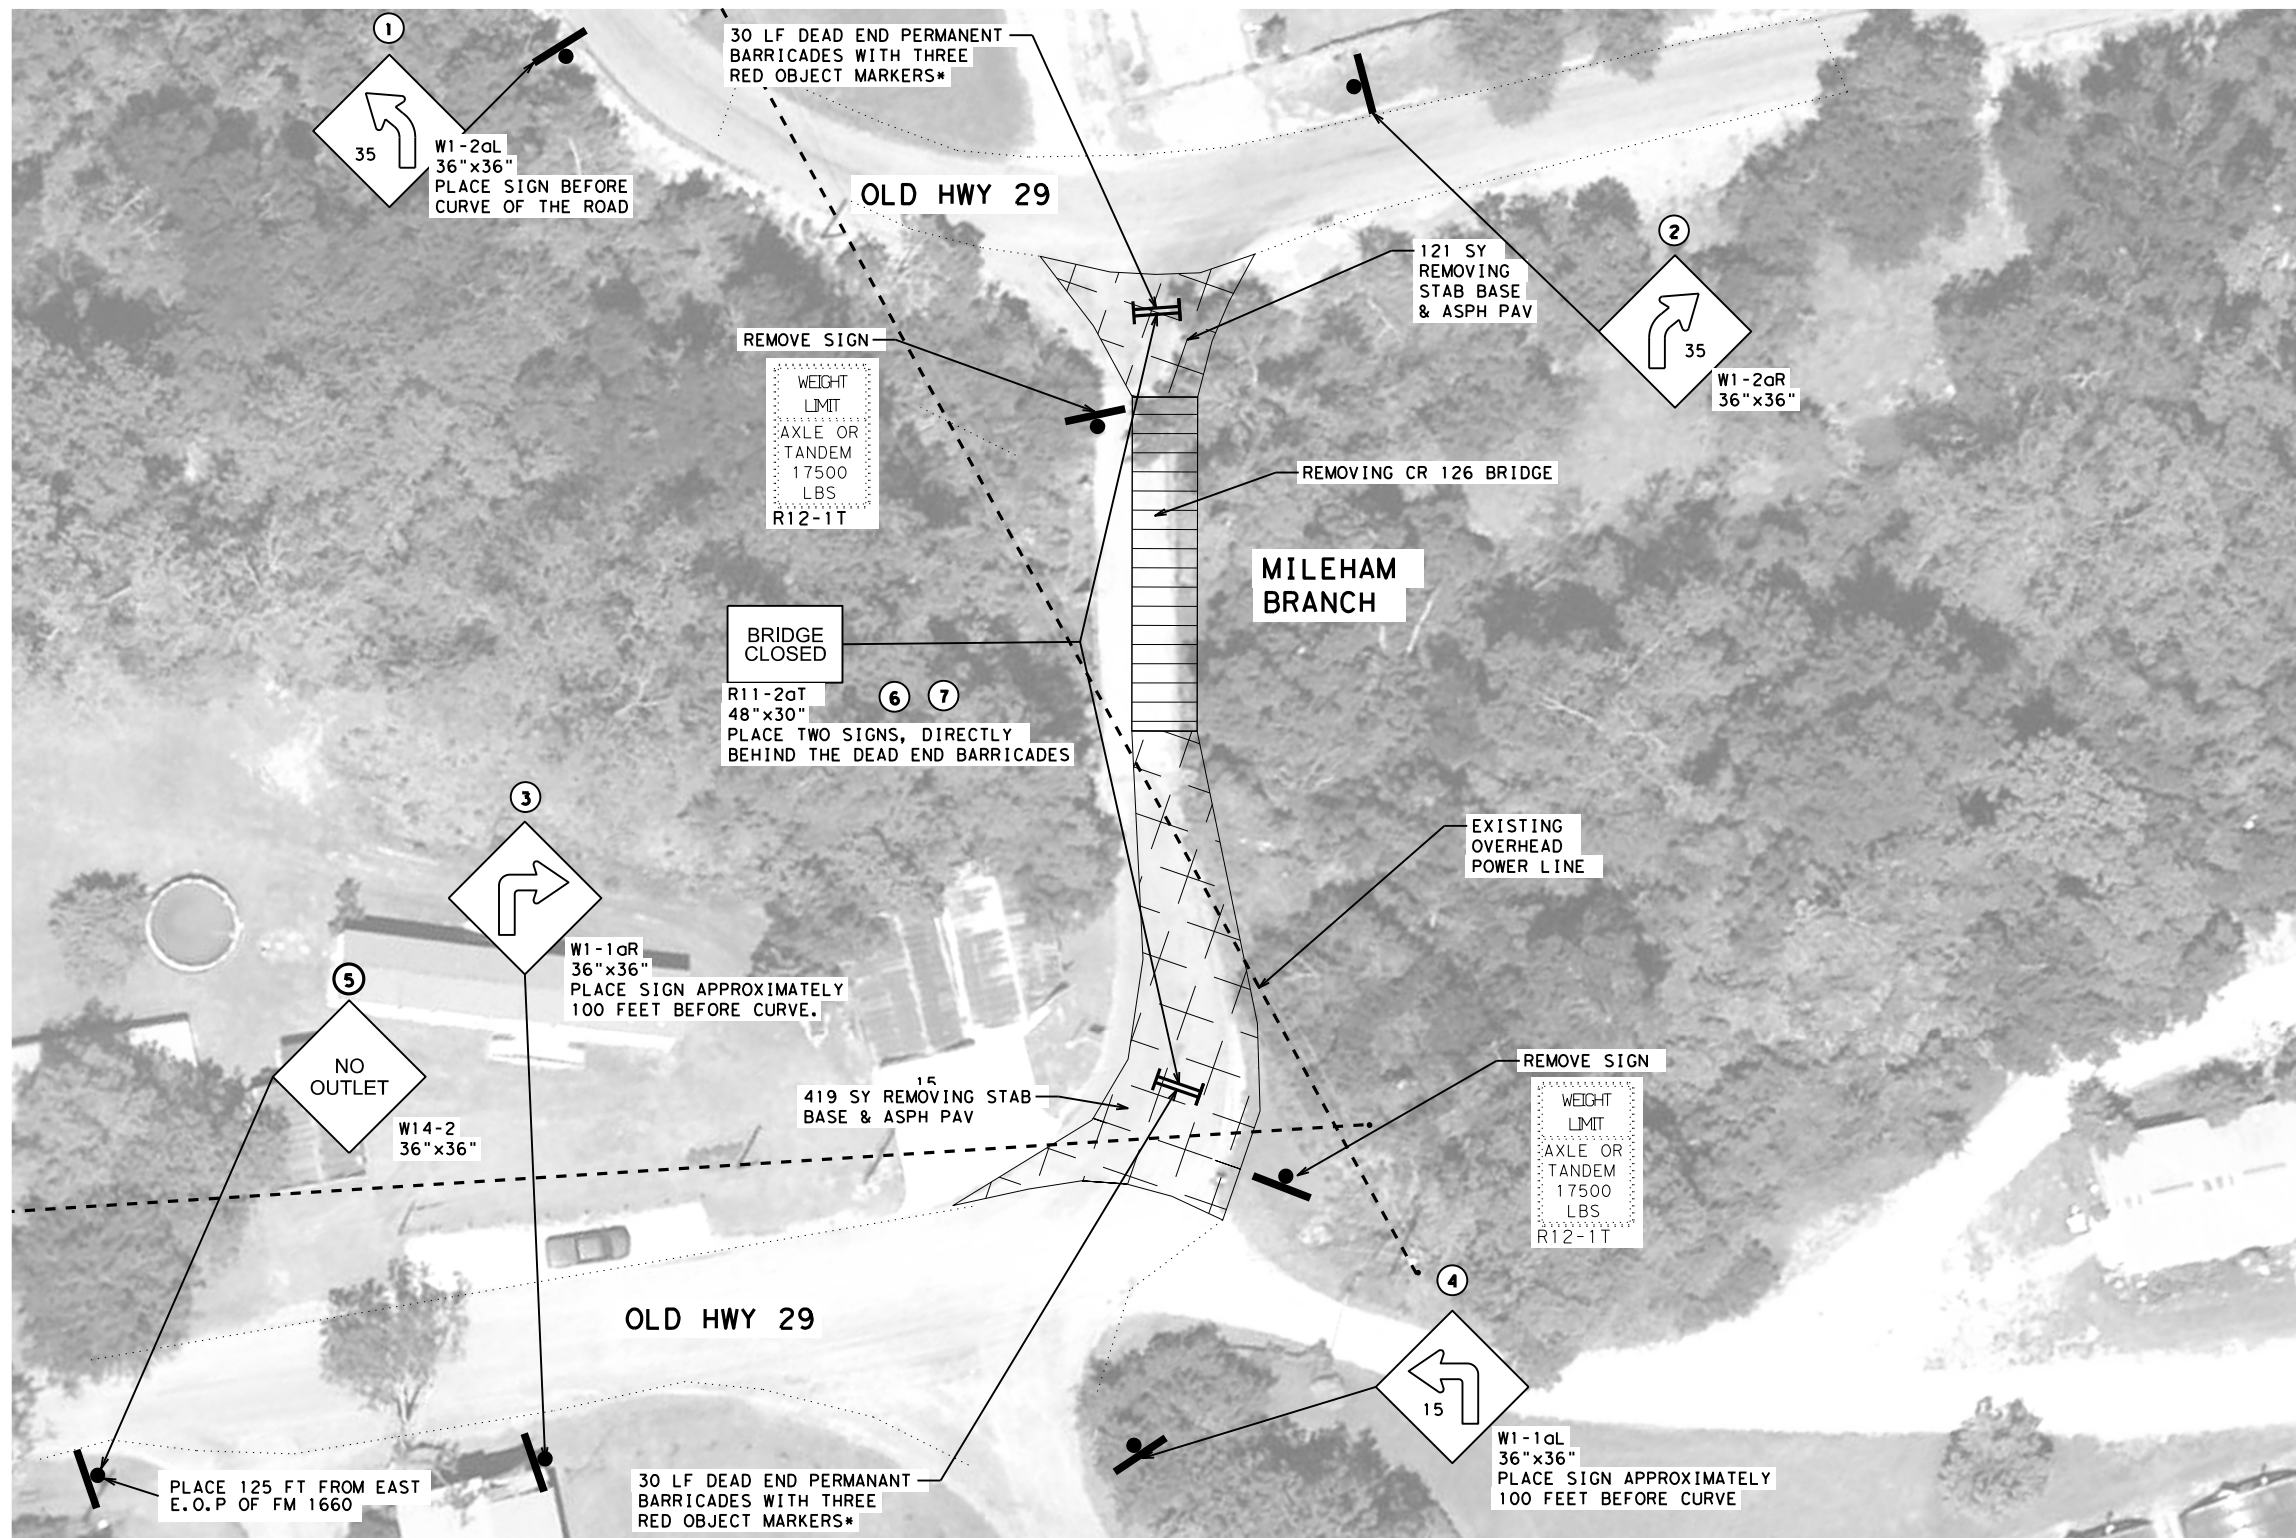

DocuSigned by:
 Amro Gaber
 DAD0168DA9D443D...
 11/28/2023

* DEAD END ROADWAY BARRICADE PAID BY 6120 6001, SEE STANDARD D&OM(4)-20 DETAIL 5 FOR MORE DETAILS.

* THREE RED OBJECT MARKERS (TYPE 4 OM-4) PAID BY 0658 6079. FOR POST TYPE USE WAP. SEE STANDARDS D&OM(1) & D&OM(2) FOR MORE DETAILS.

SCALE (IN FEET):
 0 50

Austin District
 Central Design



CR 126 AT MILEHAM BR
 SIGNING
 LAYOUT

SHEET 1 OF 1

© 2023	CONT	SECT	JOB	HIGHWAY
DS: CK:	0914	05	137	CR 126
DW: CK:	DIST		COUNTY	SHEET NO.
	AUS		WILLIAMSON	29

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/26/2023 7:12:43 AM
 FILE: pw://txdot.projectwiseonline.com:TXDOT4/Documents/14 - AUS/_Standards/Statewide Standards/Traffic/05-Sign Mounting/SMD(GEN)-08.dgn

SIGN SUPPORT DESCRIPTIVE CODES

(Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)

Post Type

- FRP - Fiberglass Reinforced Plastic Pipe (see SMD(FRP))
- TWT - Thin-Walled Tubing (see SMD(TWT))
- 10BWG - 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3))
- S80 - Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

Number of Posts (1 or 2)


Anchor Type

- UA - Universal Anchor - Concreted (see SMD(FRP) and (TWT))
- UB - Universal Anchor - Bolted down (see SMD(FRP) and (TWT))
- WS - Wedge Anchor Steel (see SMD(TWT))
- WP - Wedge Anchor Plastic (see SMD(TWT))
- SA - Slipbase - Concreted (see SMD(SLIP-1) to (SLIP-3))
- SB - Slipbase - Bolted Down (see SMD(SLIP-1) to (SLIP-3))

Sign Mounting Designation

- P - Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))
- T - Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))
- U - Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))
- IF REQUIRED
- TEXT or 2EXT - Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
- BM - Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
- WC - 1.12 "/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))
- EXAL - Extruded Aluminum Sign Panels (see SMD(SLIP-3))


REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT

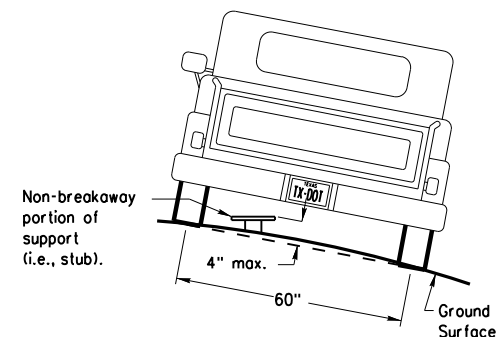

To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheelpaths).


SIGN LOCATION

PAVED SHOULDERS

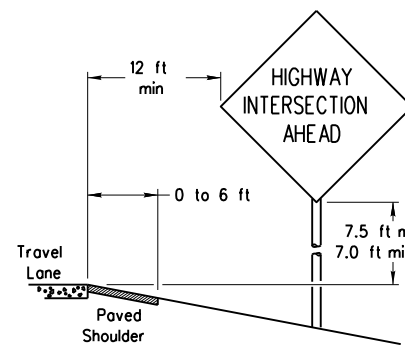

LESS THAN 6 FT. WIDE


When the shoulder is 6 ft. or less in width, the sign must be placed at least 12 ft. from the edge of the travel lane.

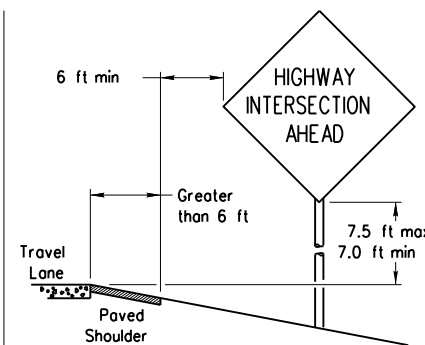

GREATER THAN 6 FT. WIDE


When the shoulder is greater than 6 ft. in width, the sign must be placed at least 6 ft. from the edge of the shoulder.

T-INTERSECTION

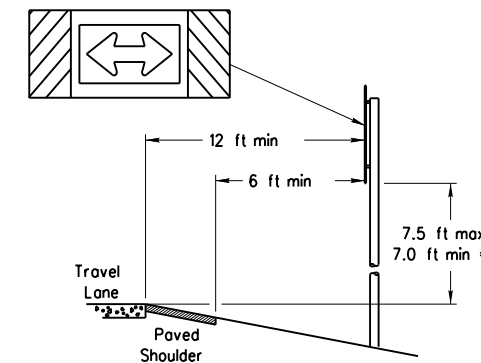


When this sign is needed at the end of a two-lane, two-way roadway, the right edge of the sign should be in line with the centerline of the roadway. Place as close to ROW as practical.

No more than 2 sign posts should be located within a 7 ft. circle.

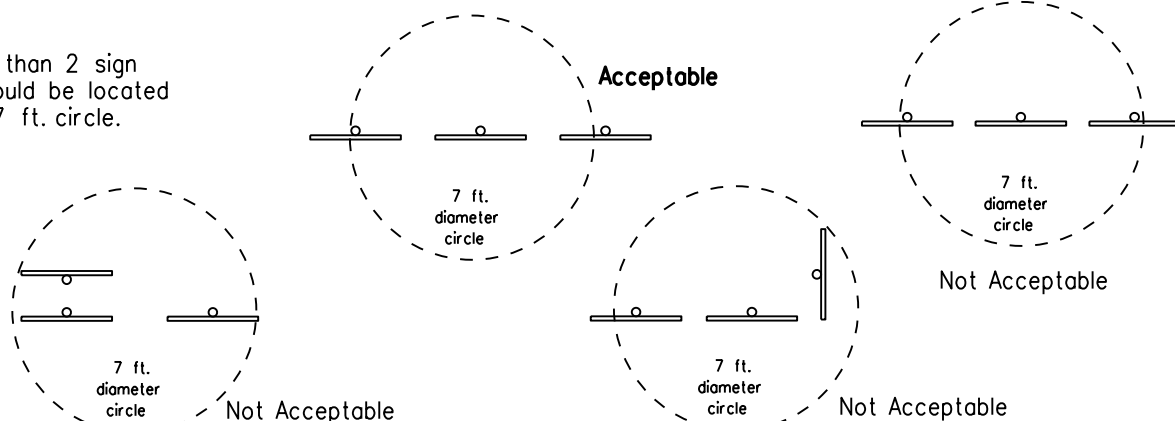


BEHIND BARRIER

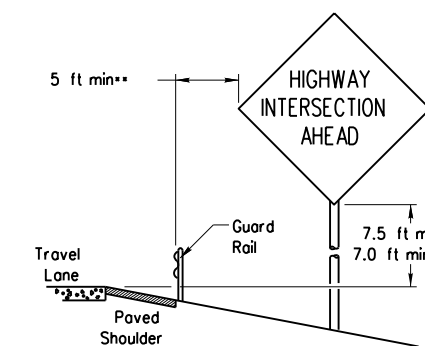


BEHIND GUARDRAIL

**Sign clearance based on distance required for proper guard rail or concrete barrier performance.

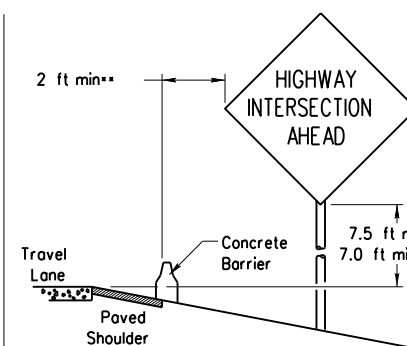

BEHIND CONCRETE BARRIER

TYPICAL SIGN ATTACHMENT DETAIL

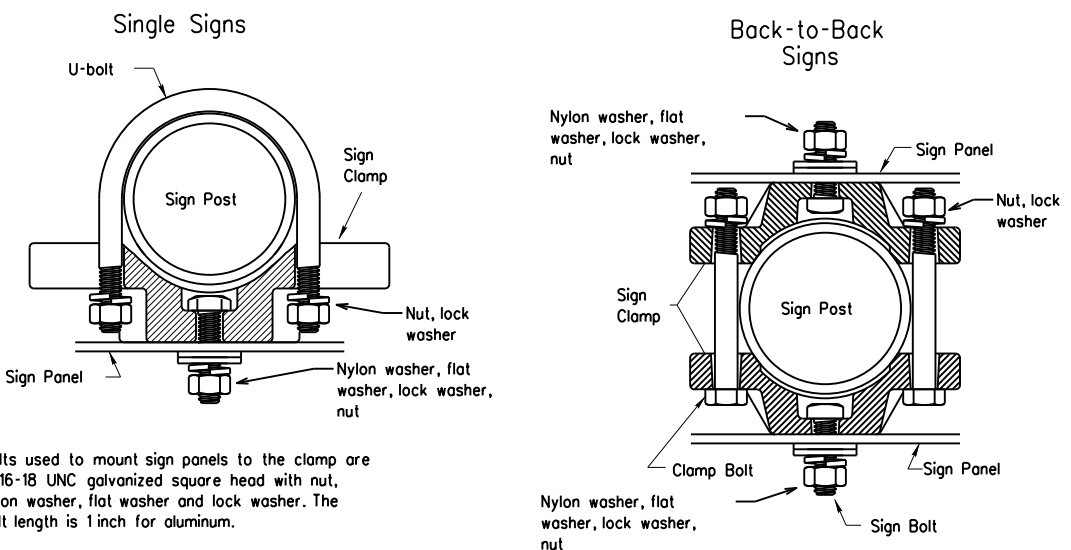


Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.

Sign clamps may be either the specific size clamp or the universal clamp.


Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"

SIGNS WITH PLAQUES

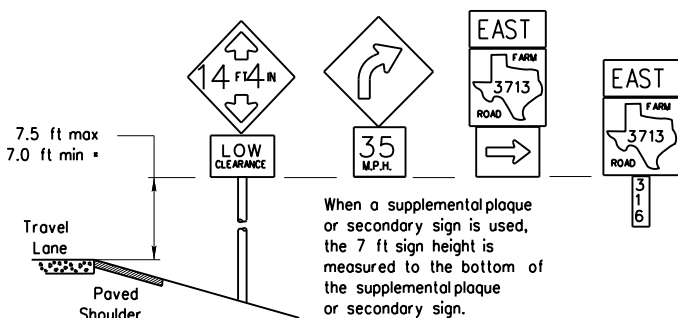


When a supplemental plaque or secondary sign is used, the 7 ft sign height is measured to the bottom of the supplemental plaque or secondary sign.

CURB & GUTTER OR RAISED ISLAND

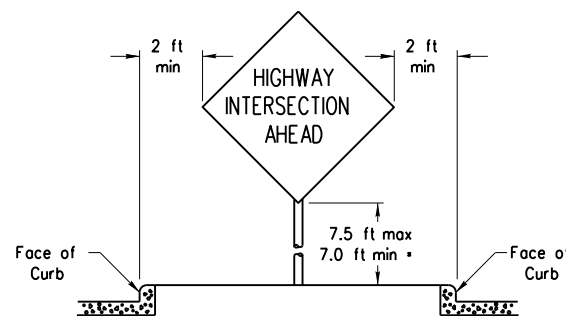

RESTRICTED RIGHT-OF-WAY


(When 6 ft min. is not possible.)

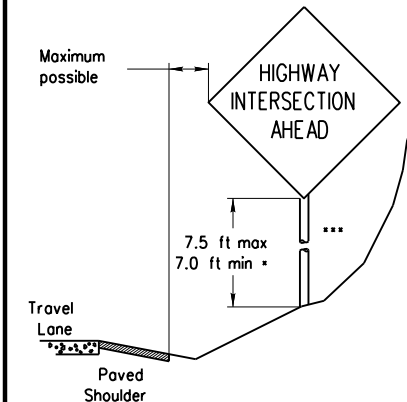

Right-of-way restrictions may be created by rocks, water, vegetation, forest, buildings, a narrow island, or other factors.

In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

*** Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme slope.

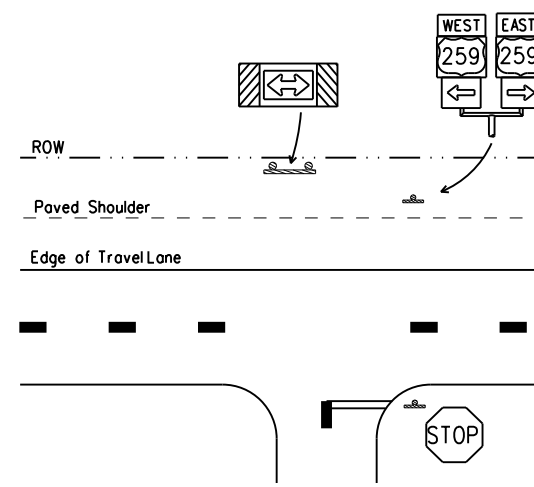

* Signs shall be mounted using the following condition that results in the greatest sign elevation:

- (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
- (2) a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.

The maximum values may be increased when directed by the Engineer.

See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.

The website address is:
<http://www.txdot.gov/publications/traffic.htm>




SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS GENERAL NOTES & DETAILS

SMD(GEN)-08

©2023	July 2002	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0914	05	137	CR 126
		DIST	COUNTY		SHEET NO.
		AUS	WILLIAMSON		32

TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS

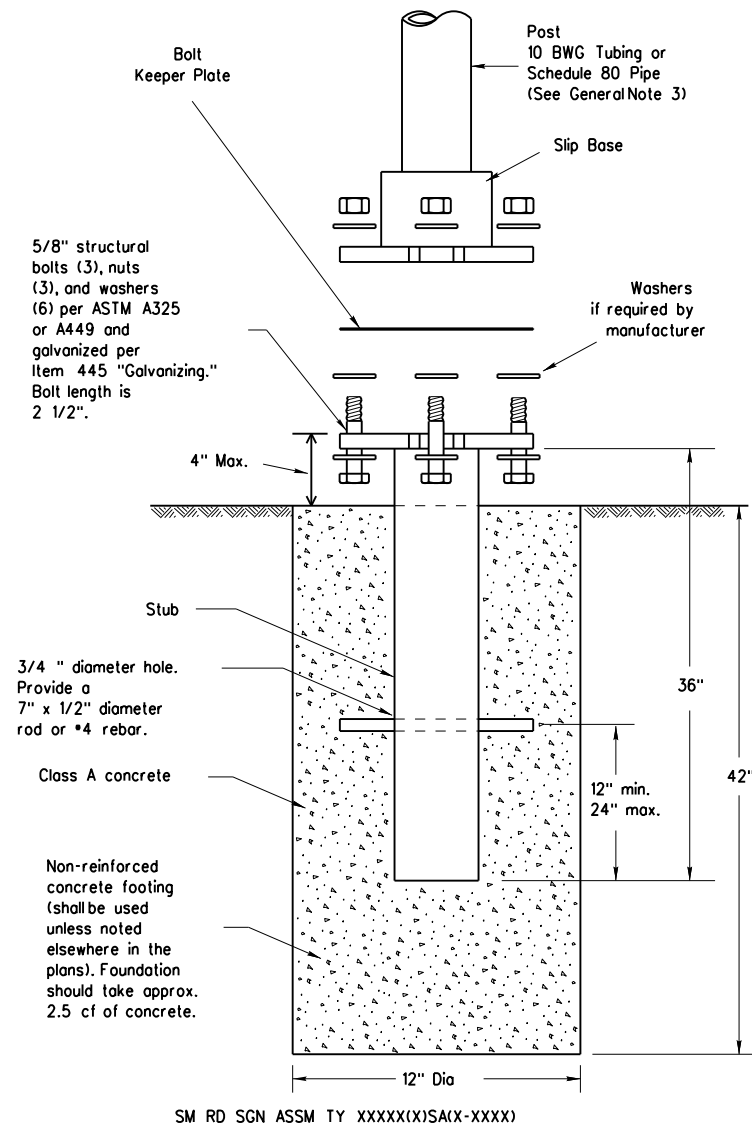

5/8" structural bolts (3), nuts (3), and washers (6) per ASTM A325 or A449 and galvanized per Item 445 "Galvanizing." Bolt length is 2 1/2".

3/4" diameter hole. Provide a 7" x 1/2" diameter rod or #4 rebar.

Class A concrete

Non-reinforced concrete footing (shall be used unless noted elsewhere in the plans). Foundation should take approx. 2.5 cf of concrete.

SM RD SGN ASSM TY XXXXX(X)SA(X-XXXX)

NOTE

There are various devices approved for the Triangular Slipbase System. Please reference the Material Producer List for approved slip base systems. http://www.txdot.gov/business/producer_list.htm The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.

GENERAL NOTES:

- Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- Material used as post with this system shall conform to the following specifications:
 - 10 BWG Tubing (2.875" outside diameter)
 - 0.134" nominal wall thickness
 - Seamless or electric-resistance welded steel tubing or pipe
 - Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
 - Other steels may be used if they meet the following:
 - 55,000 PSI minimum yield strength
 - 70,000 PSI minimum tensile strength
 - 20% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"
 - Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"
 - Galvanization per ASTM A123 or ASTM A653 G210. For pre-coated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
 - Schedule 80 Pipe (2.875" outside diameter)
 - 0.276" nominal wall thickness
 - Steel tubing per ASTM A500 Gr C
 - Other seamless or electric-resistance welded steel tubing or pipe with equivalent outside diameter and wall thickness may be used if they meet the following:
 - 46,000 PSI minimum yield strength
 - 62,000 PSI minimum tensile strength
 - 21% minimum elongation in 2"
 - Wall thickness (uncoated) shall be within the range of 0.248" to 0.304"
 - Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"
 - Galvanization per ASTM A123
- See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.


ASSEMBLY PROCEDURE

- Foundation**
- Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
 - The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
 - Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
 - Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
 - The triangular slipbase system is multidirectional and is designed to release when struck from any direction.

Support

- Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and straight.
- Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD(SLIP-2) for clearances based on sign types.

CONCRETE ANCHOR

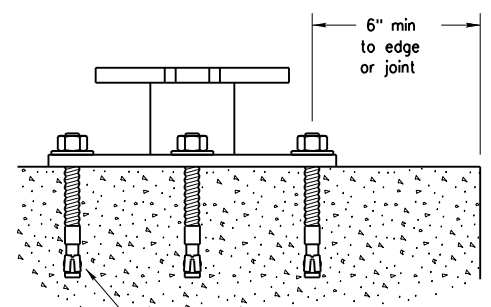


5/8" diameter Concrete Anchor - 8 places (embed a minimum of 5 1/2" and torque to min. of 50 ft-lbs). Anchor may be expansion or adhesive type.

SM RD SGN ASSM TY XXXXX(X)SB(X-XXXX)

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 9/26/2023 7:12:44 AM
 FILE: pw://txdot.projectwiseonline.com/TxDOT4/Documents/14 - AUS/_Standards/Statewide Standards/Traffic/05-Sign Mounting/SMD(SLIP-1)-08.dgn



Texas Department of Transportation
Traffic Operations Division





SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
TRIANGULAR SLIPBASE SYSTEM

SMD(SLIP-1)-08

© 2023	July 2002	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0914	05	137	CR 126
		DIST	COUNTY	SHEET NO.	
AUS	WILLIAMSON	33			


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/26/2023 7:12:45 AM
 FILE: pw://ttdot.projectwiseonline.com/TxDOT14/Documents/14 - AUS/Standards/Statewide Standards/Traffic/05-Sign Mounting/SMD(SLIP-2)-08.dgn

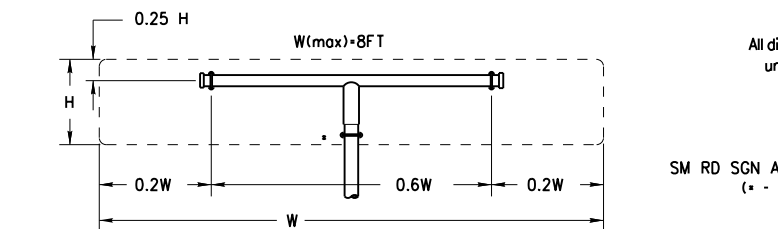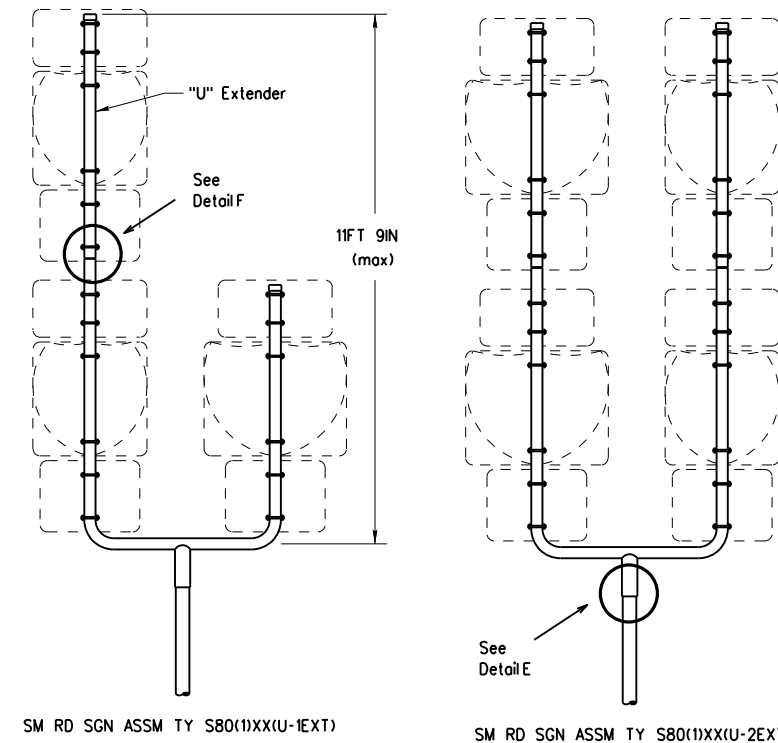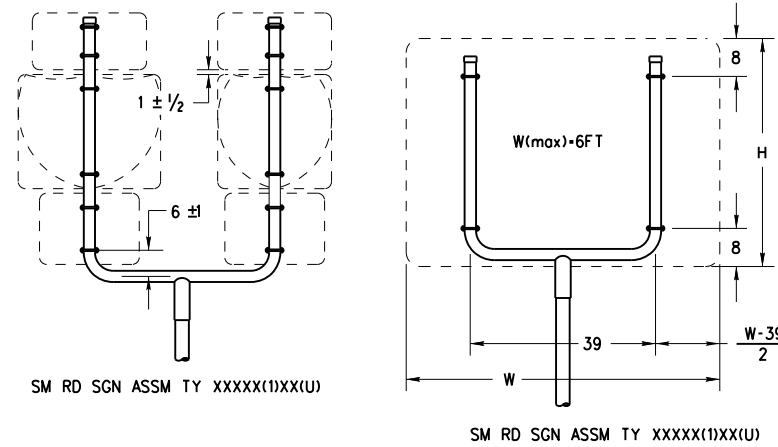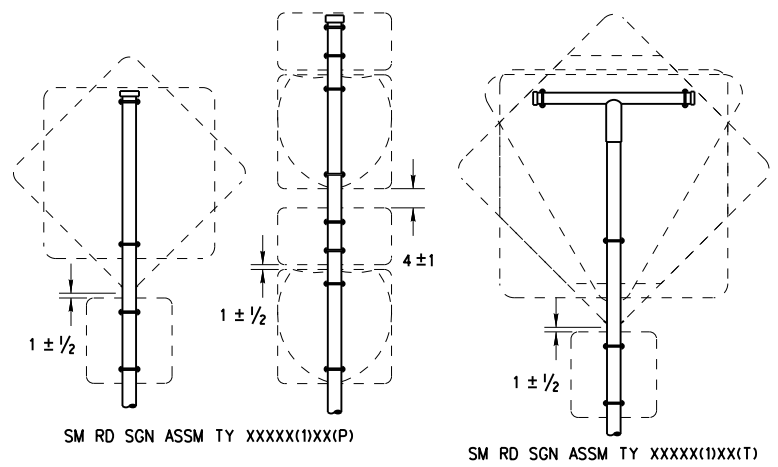


All dimensions are in english unless detailed otherwise.


SM RD SGN ASSM TY XXXXX(1)XX(T) (* - See Note 12)

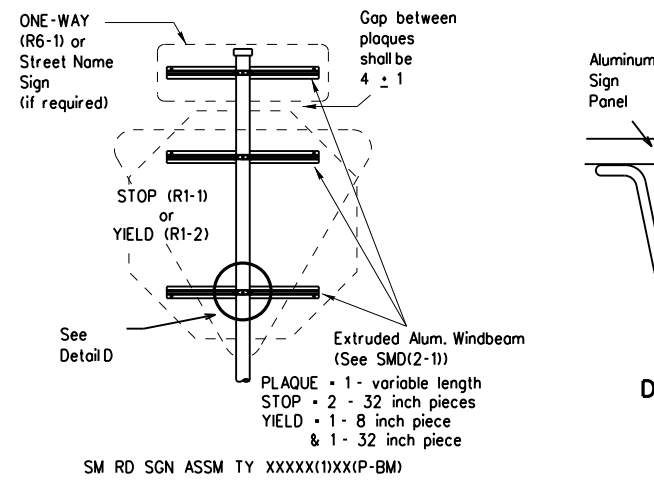


SM RD SGN ASSM TY XXXXX(1)XX(P-BM)

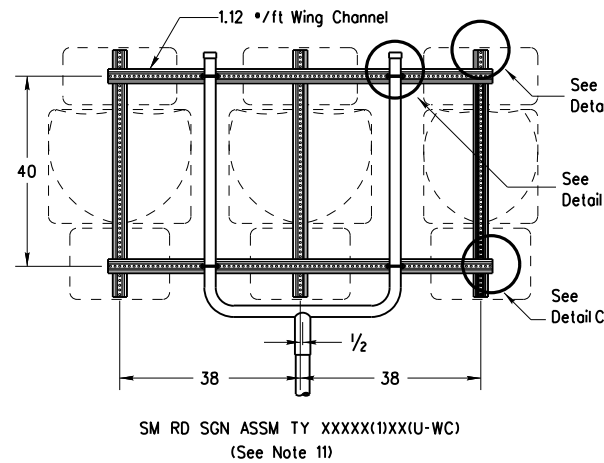


SM RD SGN ASSM TY XXXXX(1)XX(U-WC) (See Note 11)

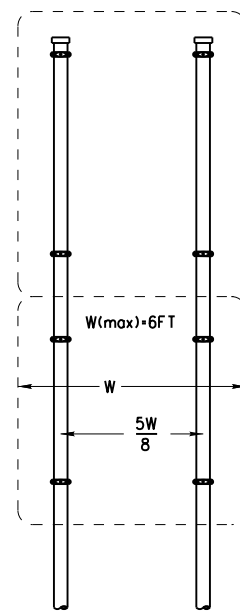


SM RD SGN ASSM TY XXXXX(2)XX(P)

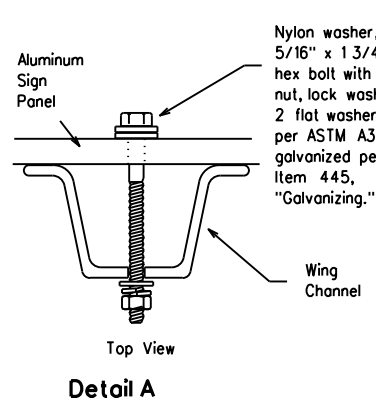

Detail A

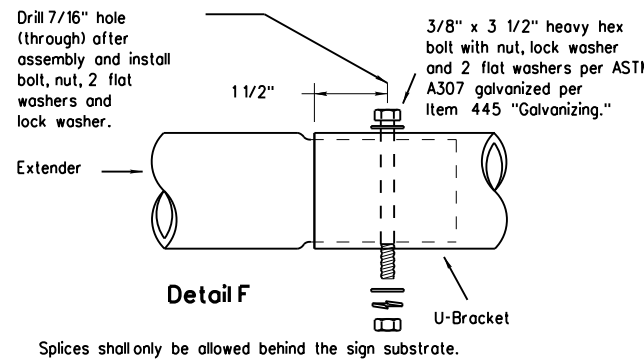


Detail F

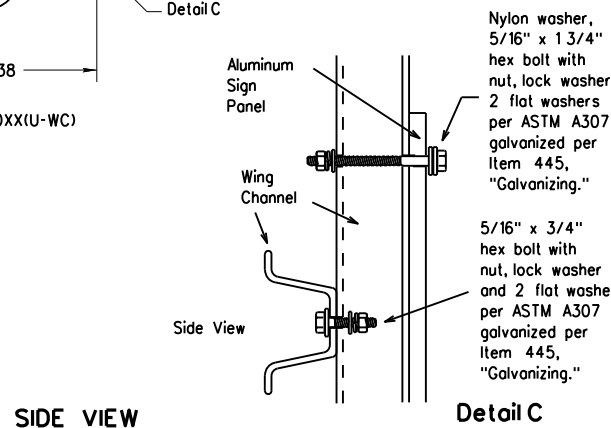


SIDE VIEW


Detail C

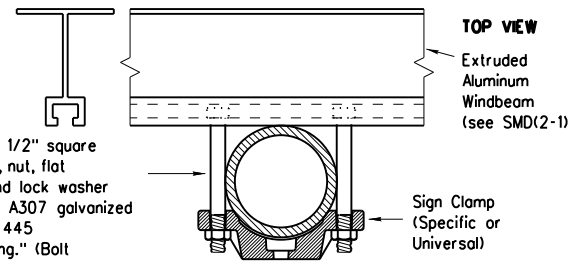


Detail D

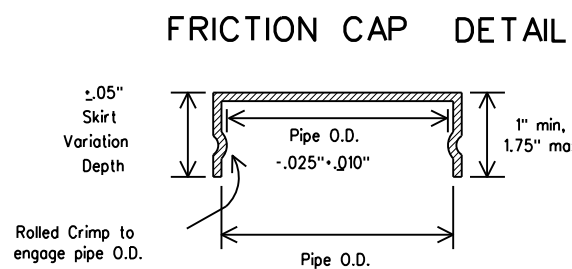

Friction caps may be manufactured from hot rolled or cold rolled steelsheets. The minimum sheet metal thickness shall be 24 gauge for all cap sizes. The rim edges shall be reasonably straight and smooth. Caps shall be sized and formed in such a manner as to produce a drive-on friction fit and have no tendency to rock when seated on the pipe. The depth shall be sufficient to give positive protection against entrance of rainwater. They shall be free of sharp creases or indentations and show no evidence of metal fracture. Caps shall have an electrodeposited coating of zinc in accordance with the requirements of ASTM B633 Class FE/ZN 8.

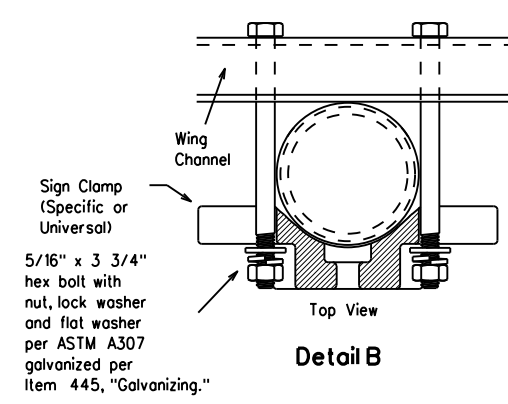

Detail B

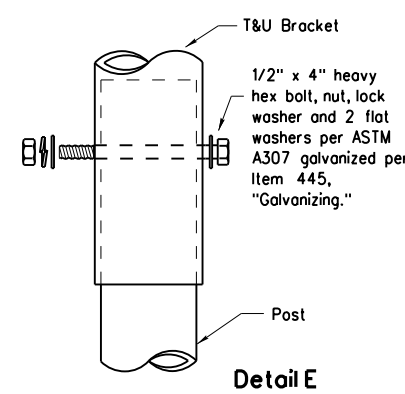

Detail E

GENERAL NOTES:

- | SIGN SUPPORT | OF POSTS | MAX. SIGN AREA |
|--------------|----------|----------------|
| 10 BWG | 1 | 16 SF |
| 10 BWG | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
- Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.
- Sign blanks shall be the sizes and shapes shown on the plans.

REQUIRED SUPPORT	
SIGN DESCRIPTION	SUPPORT
48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
48x60-inch signs	TY S80(1)XX(T)
48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
48x60-inch signs	TY S80(1)XX(T)
48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)











Texas Department of Transportation
 Traffic Operations Division

SIGN MOUNTING DETAILS
 SMALL ROADSIDE SIGNS
 TRIANGULAR SLIPBASE SYSTEM
 SMD(SLIP-2)-08

©2023	July 2002	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0914	05	137	CR 126
		DIST	COUNTY		SHEET NO.
		AUS	WILLIAMSON		34

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 9/26/2023 7:12:47 AM
 FILE: pw://txdot.projectwiseonline.com:TXDOT4/Documents/14 - AUS/Standards/Statewide Standards/Traffic/05-Sign Mounting/SMD(SLIP-3)-08.dgn

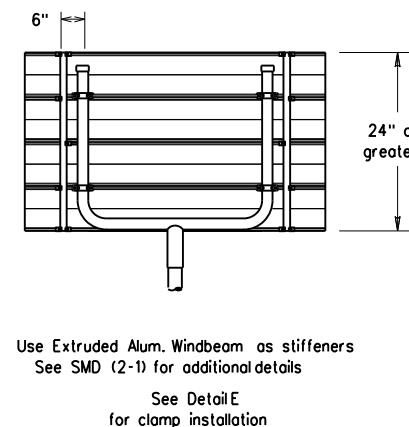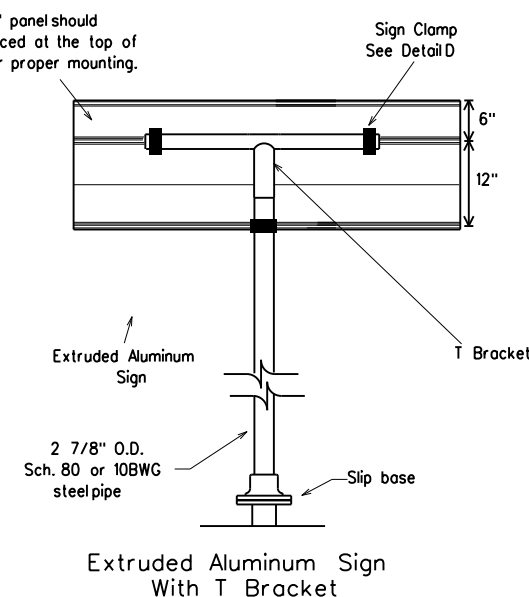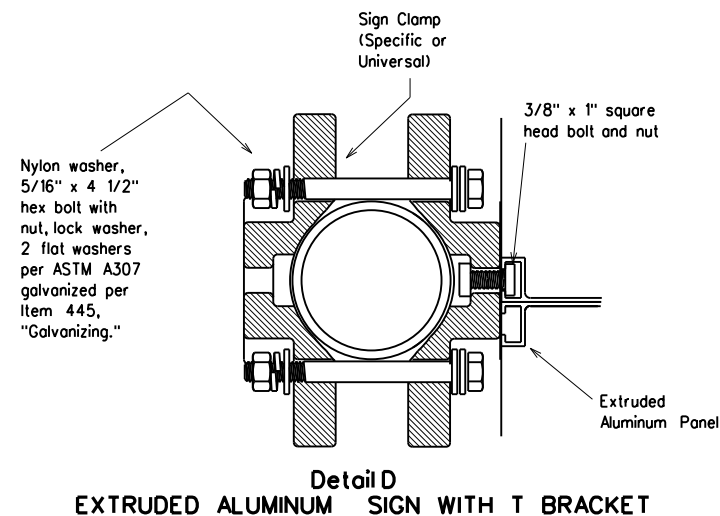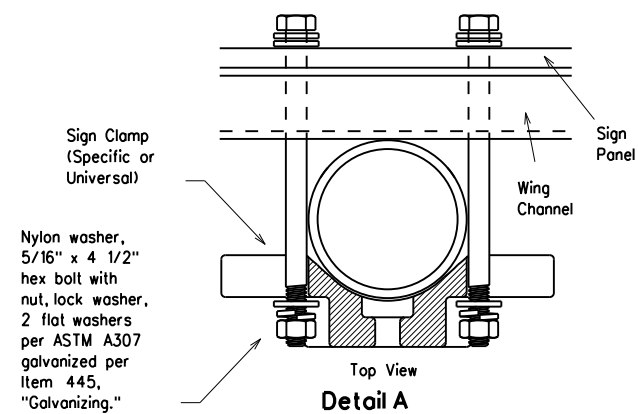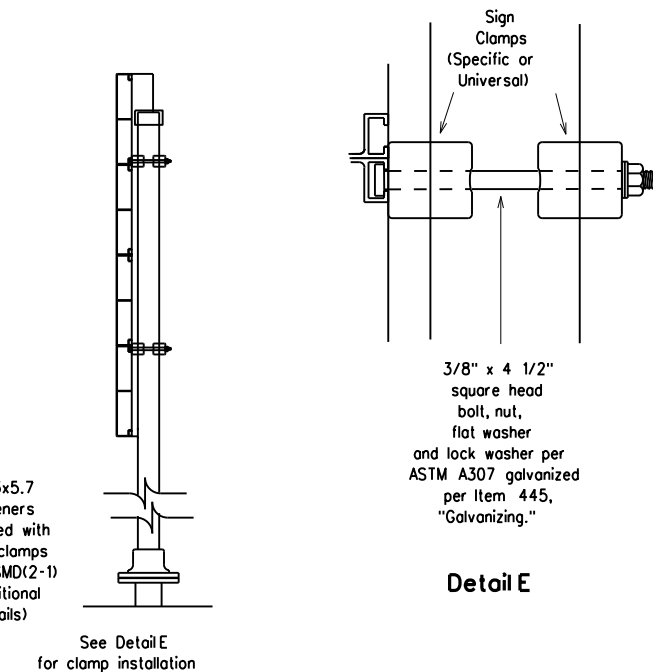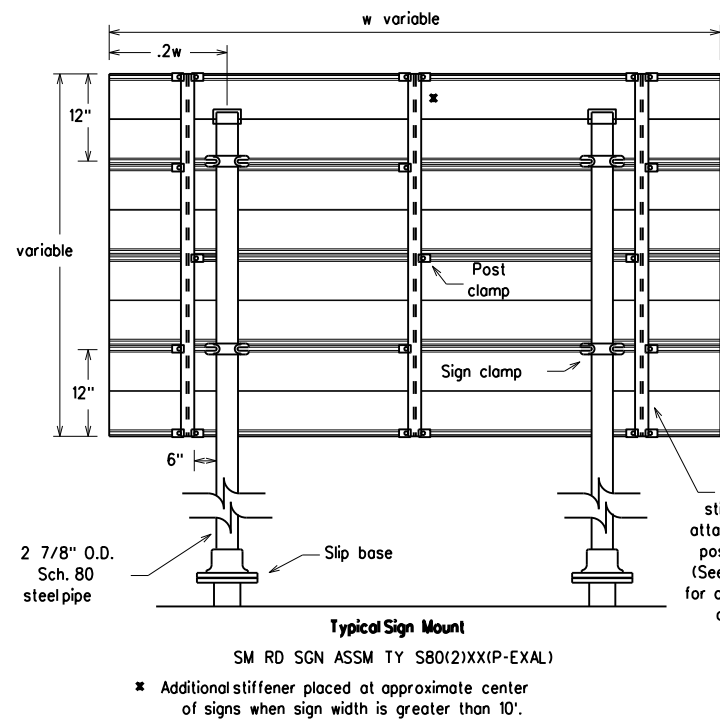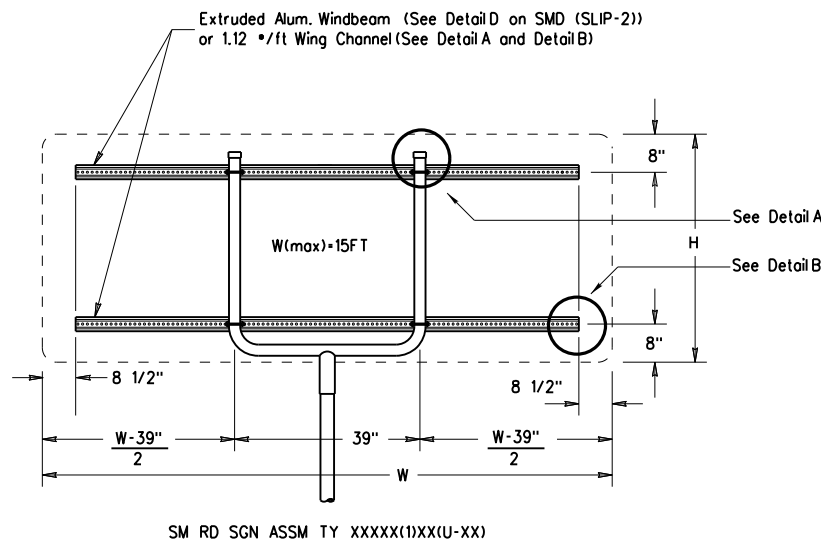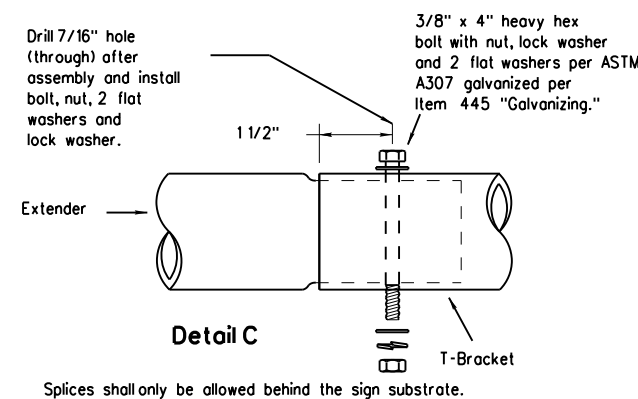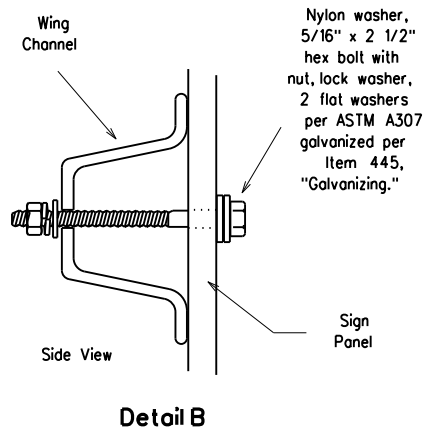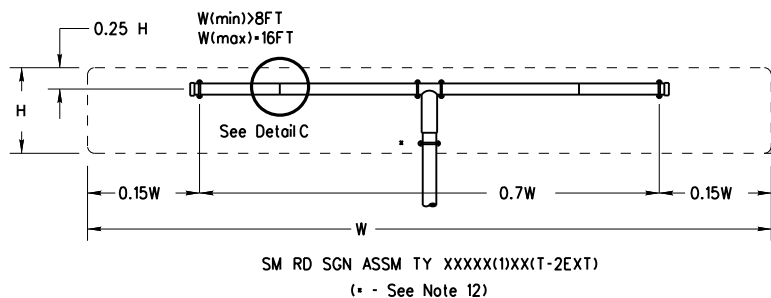

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG | 1 | 16 SF |
| 10 BWG | 2 | 32 SF |
| Sch 80 | 1 | 32 SF |
| Sch 80 | 2 | 64 SF |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24 inch high signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.




		REQUIRED SUPPORT	
		SIGN DESCRIPTION	SUPPORT
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)	
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)	
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)	
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)	
Warning	48x60-inch signs	TY S80(1)XX(T)	
	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)	
	48x60-inch signs	TY S80(1)XX(T)	
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)	
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)	
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)	




**SIGN MOUNTING DETAILS
 SMALL ROADSIDE SIGNS
 TRIANGULAR SLIPBASE SYSTEM
 SMD(SLIP-3)-08**

©2023	July 2002	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0914	05	137	CR 126
		DIST	COUNTY		SHEET NO.
		AUS	WILLIAMSON		35


Universal Anchor System with Fiberglass Reinforced Plastic (FRP) Post

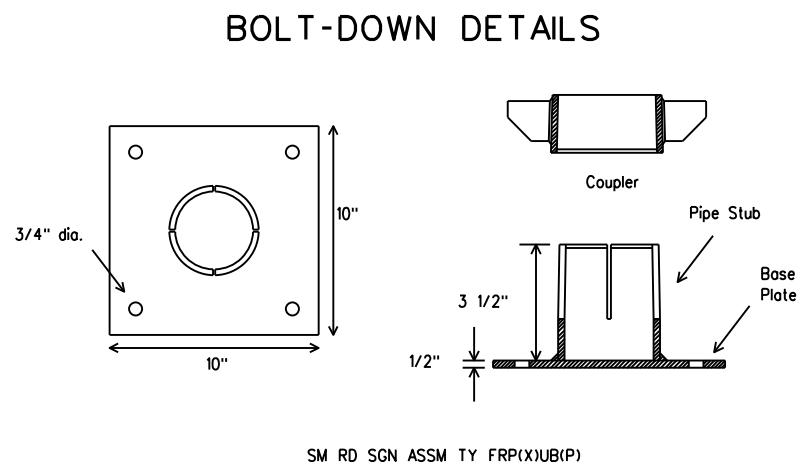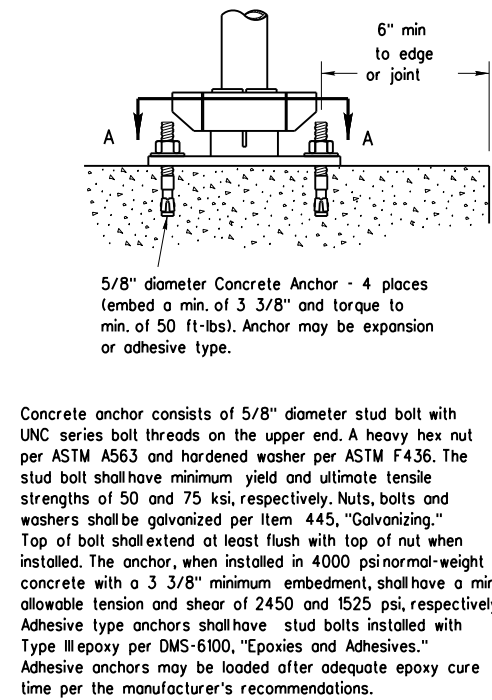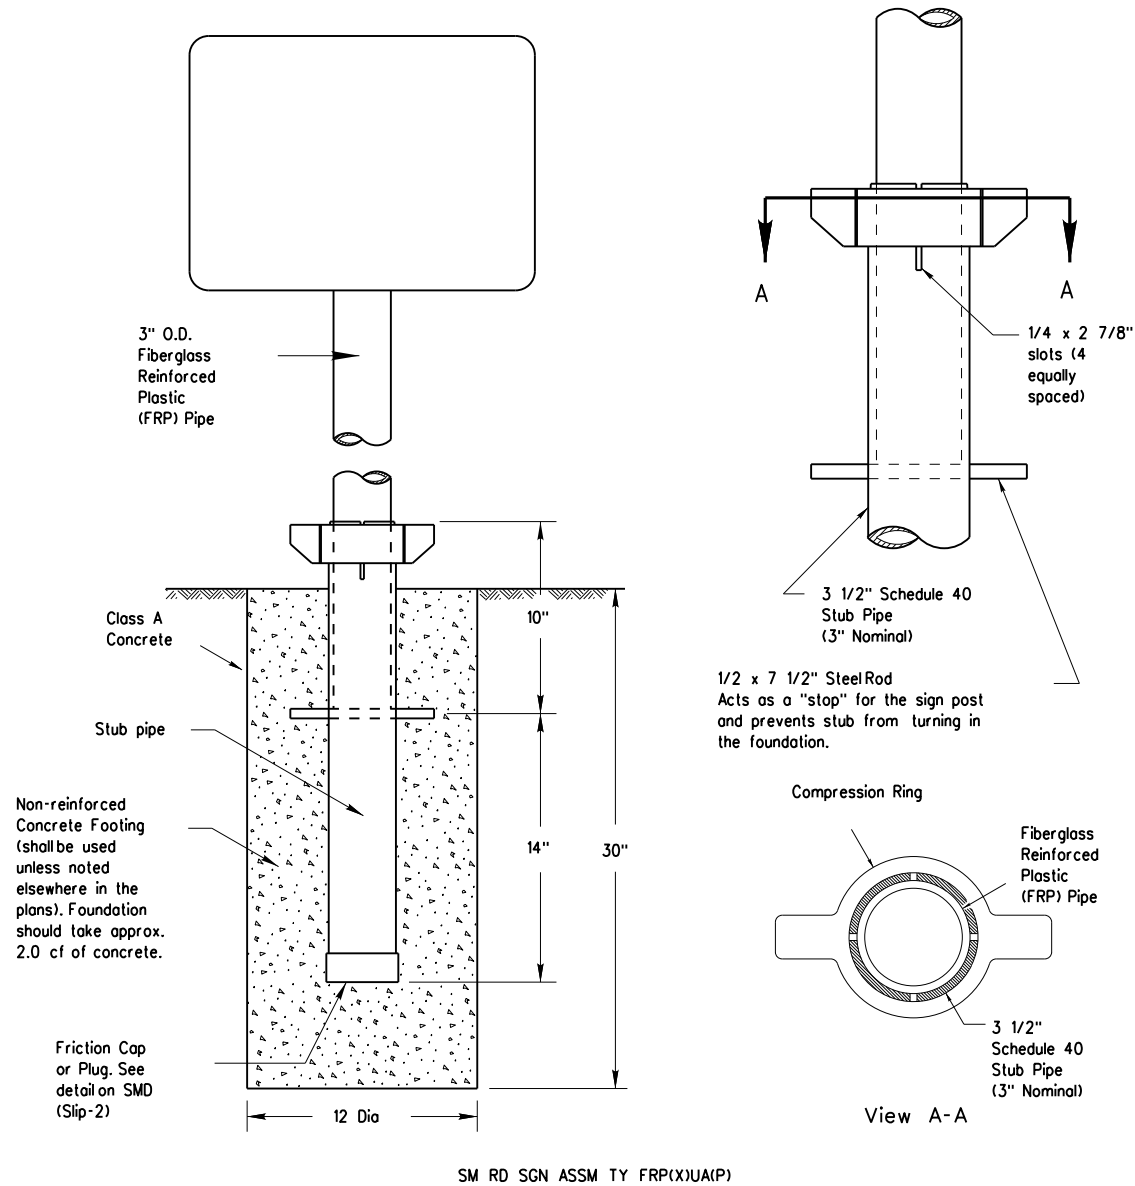

Typical Sign Mounting Detail for FRP Support with Single Sign

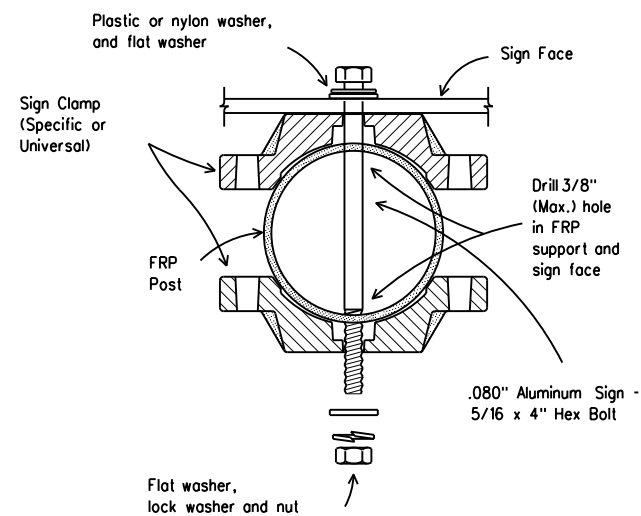

Typical Sign Mounting Detail for FRP Support with Back-to-Back Signs

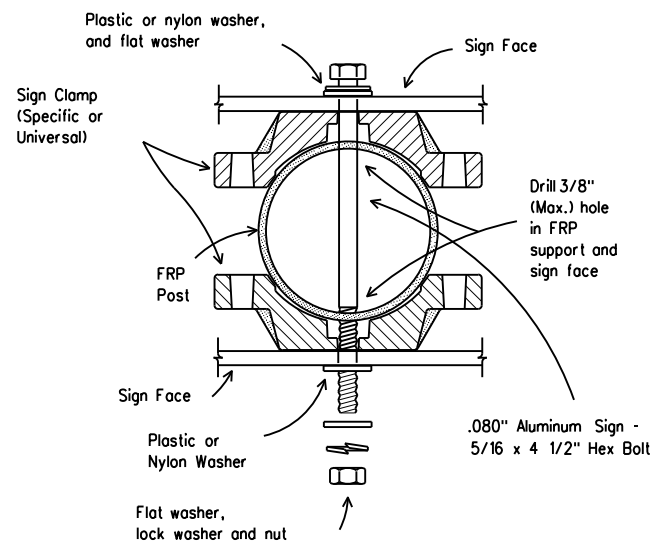

GENERAL NOTES:

- FRP sign supports for a single type sign support may be used for signs up to and including 16 square feet. Dualpost installation may be used for signs up to and including 32 square feet.
- All nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing."
- FRP sign supports are prequalified by the Traffic Operations Division. The website address is: <http://www.txdot.gov/publications/traffic.htm>

FRP POST REQUIREMENTS

- Materials shall conform to the requirements of Departmental Material Specification DMS-4410 and will be furnished in a yellow or gray color as specified elsewhere in the plans.
- Thickness of FRP sign support is 0.125" ± 0.031", - 0.0".
- FRP sign supports are prequalified by the Traffic Operations Division. Prequalification procedures are obtained by writing: Texas Department of Transportation Traffic Operations Division 125 East 11th Street Austin, Texas 78701-2483


UNIVERSAL ANCHOR SYSTEM INSTALLATION PROCEDURES

- Dig foundation hole. Where solid rock is encountered at ground level, the foundation shall be a minimum depth of 18". When solid rock is encountered below ground level, the foundation shall extend in the solid rock a minimum depth of 18" or provide a minimum foundation depth of 30". If solid rock is encountered, the socket/stub may be reduced in length as required to a minimum length of 18". Any material removed from the socket/stub shall be from the bottom and the clearance requirements given on SMD(GEN) must be followed. The inner surfaces of the socket/stub must remain free of concrete or other debris.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- Insert base post in foundation hole to depths shown and fill hole with concrete. Cut base post from bottom and ensure a minimum of 18" embedment if installed in solid rock.
- Level and plumb the base post with coupler using a torpedo level and let concrete set a minimum of 4 days, unless otherwise directed by Engineer. Bottom of base post slots shall be above the concrete footing.
- Attach sign to FRP post.
- Insert sign post into base post. Lower until the post comes to rest on the steelrod.
- Use hammer to ensure the coupler is firmly seated. Top of coupler should be level with top of base post in most instances.
- Check sign to ensure there is no twist. If loose, increase the tightening of coupler.

BOLT DOWN SIGN SUPPORT

- Position base plate with coupler on existing concrete.
- Drill holes into concrete and insert the 5/8" diameter bolts with wedge anchors, and tighten nuts.
- Attach sign to FRP post.
- Insert bottom of sign post into pipe stub.
- Use hammer to ensure the coupler is firmly seated. Top of coupler should be level with top of base post in most instances.
- Check sign to ensure there is no twist. If loose, increase the tightening of coupler.

DATE: 9/26/2023 7:12:48 AM
 FILE: pw://txdot.projectwiseonline.com:TXDOT14/Documents/14 - AUS/Standards/Statewide Standards/Traffic/05-Sign Mounting/SMD(FRP)-08.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.




Texas Department of Transportation
Traffic Operations Division

**SIGN MOUNTING DETAILS
SMALL ROADSIDE SIGNS
UNIVERSAL ANCHOR SYSTEM
WITH FRP POST**


SMD(FRP)-08

© TxDOT July 2002		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
9-08	REVISIONS		CONT	SECT	JOB
			0914	05	137
			DIST	COUNTY	SHEET NO.
		AUS	WILLIAMSON	36	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information resulting from its use.

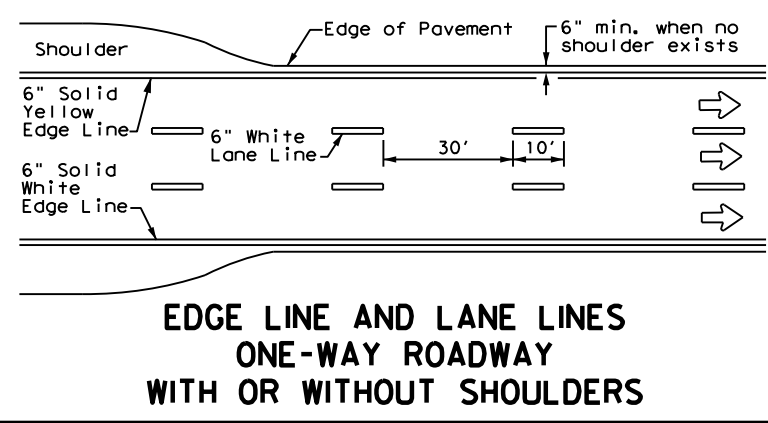

**EDGE LINE AND LANE LINES
ONE-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

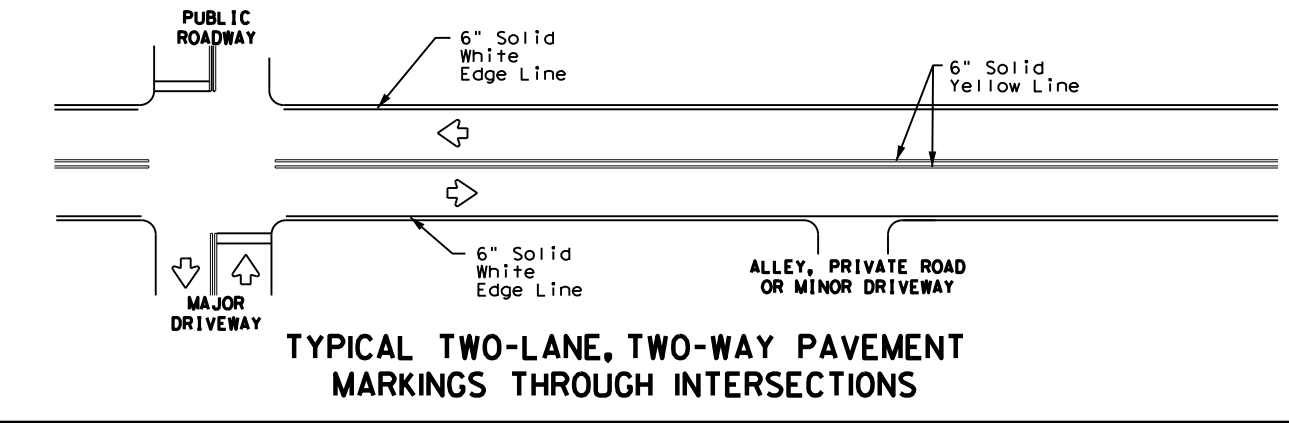


**TYPICAL TWO-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**


- GENERAL NOTES**
- Edge line striping shall be as shown in the plans or as directed by the Engineer. The edge line should not be placed less than 6 inches from the edge of pavement. This distance may vary due to pavement raveling or other conditions. Edge lines are not required in curb and gutter sections of roadways.
 - The traveled way includes only that portion of the roadway used for vehicular travel. It does not include the parking lanes, sidewalks, berms and shoulders. The traveled ways shall be measured from the center of edge line to the center of edge line of a two lane roadway.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

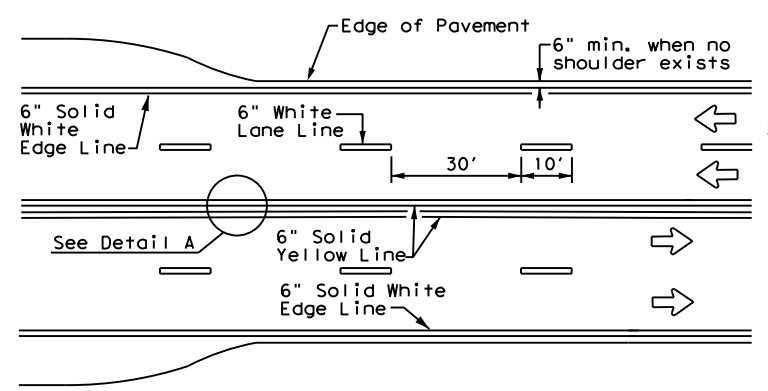


**CENTERLINE AND LANE LINES
FOUR LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

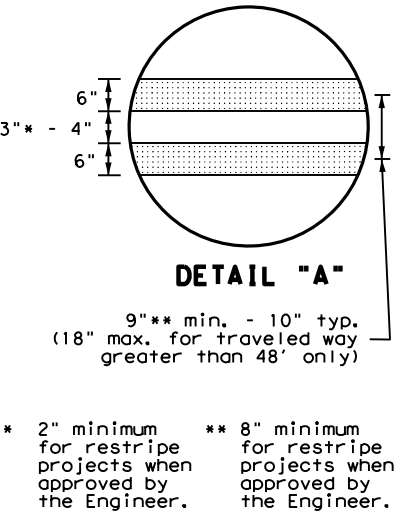


* 2" minimum for restripe projects when approved by the Engineer.
 ** 8" minimum for restripe projects when approved by the Engineer.

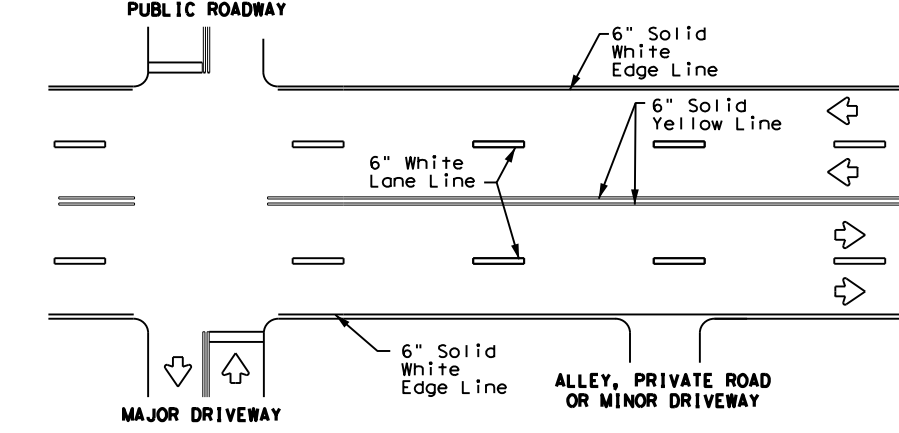


**TYPICAL MULTI-LANE, TWO-WAY PAVEMENT
MARKINGS THROUGH INTERSECTIONS**

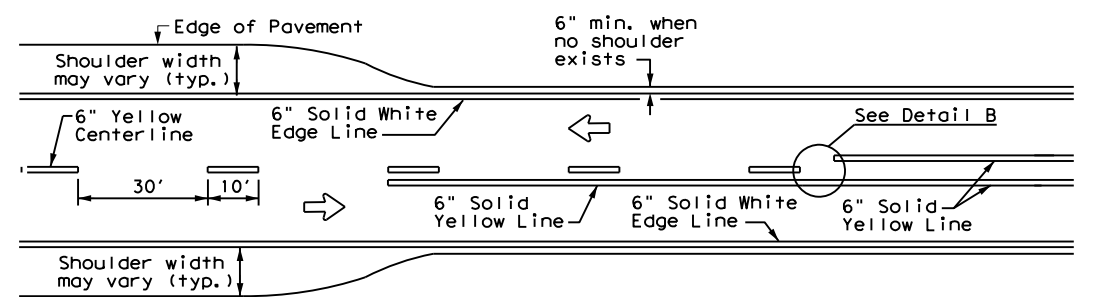


**TWO LANE TWO-WAY ROADWAY
WITH OR WITHOUT SHOULDERS**

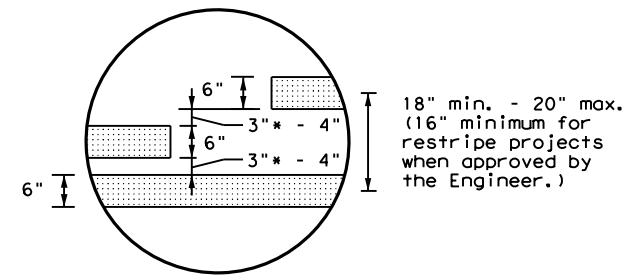

* 2" minimum for restripe projects when approved by the Engineer.




YIELD LINES




NOTES

- Where divided highways are separated by median widths at the median opening itself of 30 feet or more, median openings shall be signed as two separate intersections. Each median opening has two width measurements, with one measurement for each approach. The narrow median width will be the controlling width to determine if signs are required. Yield signs are the typical intersection control. Stop signs and stop bars are optional as determined by the Engineer.
- Install median striping (double yellow centerlines and stop lines/yield lines) when a 50' or greater median centerline can be placed. Stop lines shall only be used with stop signs. Yield lines shall only be used with yield signs.
- Length of turn bays, including taper, deceleration, and storage lengths shall be as shown on the plans or as directed by the Engineer.

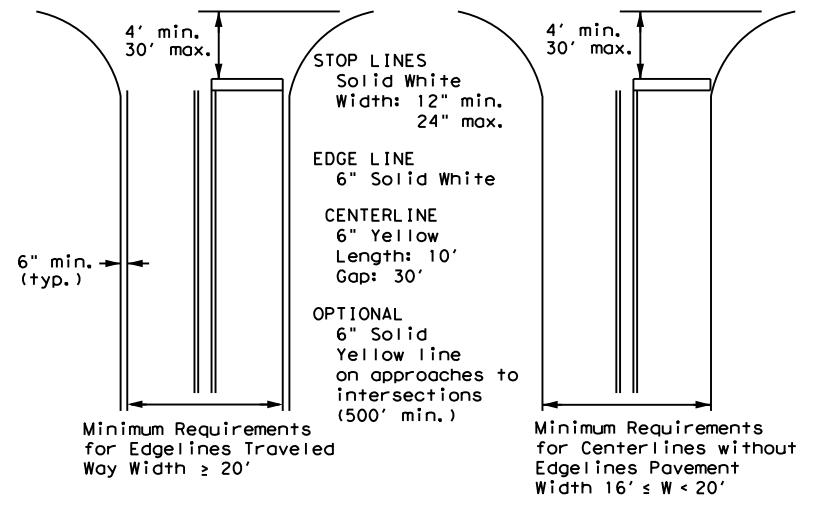

NOTE: Traveled way is exclusive of shoulder widths. Refer to General Note 2 for additional details.

**GUIDE FOR PLACEMENT OF STOP LINES,
EDGE LINE & CENTERLINE**
 Based on Traveled Way and Pavement Widths for Undivided Roadways

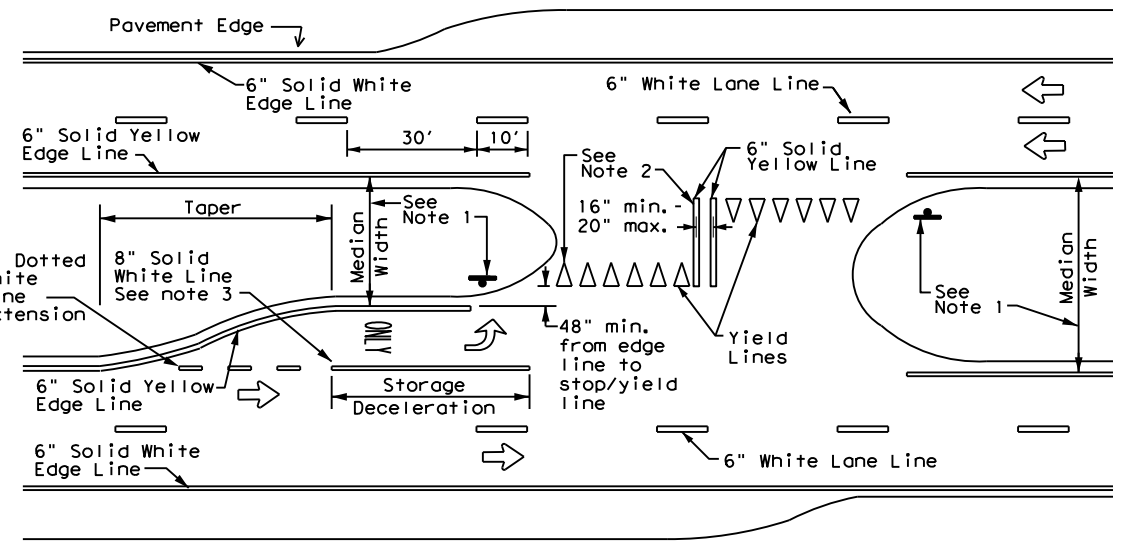

FOUR LANE DIVIDED ROADWAY CROSSOVERS

Texas Department of Transportation
 Traffic Safety Division Standard

**TYPICAL STANDARD
PAVEMENT MARKINGS**

PM(1) - 22

FILE: pm1-22.dgn	DN:	CK:	DW:	CK:
© TxDOT December 2022	CONT	SECT	JOB	HIGHWAY
REVISIONS	0914	05	137	CR 126
11-78 8-00 6-20	DIST	COUNTY	SHEET NO.	
8-95 3-03 12-22	AUS	WILLIAMSON	37	
5-00 2-12				

22A

DATE: 10/6/2023
 FILE: p:\t\dot\projectwiseonline.com\TxDOT4\Documents\14 - AUS\Design Projects\09140513774 - Design\Plan Set\9. Environmental\CR0126_ENV_EPIC.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

-
- No Action Required Required Action

Action No.

- Prevent stormwater pollution by controlling erosion and sedimentation in accordance with TPDES Permit TXR 150000
- Comply with the SW3P and revise when necessary to control pollution or required by the Engineer.
- Post Construction Site Notice (CSN) with SW3P information on or near the site, accessible to the public and TCEQ, EPA or other inspectors.
- When Contractor project specific locations (PSL's) increase disturbed soil area to 5 acres or more, submit NOI to TCEQ and the Engineer.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP# 3A

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

- Mileham Branch Ffrom STA 0+00 to STA 2+55
-
-
-

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

Best Management Practices:

Erosion	Sedimentation	Post-Construction TSS
<input type="checkbox"/> Temporary Vegetation	<input checked="" type="checkbox"/> Silt Fence	<input type="checkbox"/> Vegetative Filter Strips
<input checked="" type="checkbox"/> Blankets/Matting	<input checked="" type="checkbox"/> Rock Berm	<input type="checkbox"/> Retention/Irrigation Systems
<input type="checkbox"/> Mulch	<input type="checkbox"/> Triangular Filter Dike	<input type="checkbox"/> Extended Detention Basin
<input type="checkbox"/> Sodding	<input type="checkbox"/> Sand Bag Berm	<input type="checkbox"/> Constructed Wetlands
<input type="checkbox"/> Interceptor Swale	<input type="checkbox"/> Straw Bale Dike	<input type="checkbox"/> Wet Basin
<input type="checkbox"/> Diversion Dike	<input type="checkbox"/> Brush Berms	<input type="checkbox"/> Erosion Control Compost
<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Erosion Control Compost	<input type="checkbox"/> Mulch Filter Berm and Socks
<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Mulch Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks
<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Compost Filter Berm and Socks	<input type="checkbox"/> Vegetation Lined Ditches
	<input type="checkbox"/> Stone Outlet Sediment Traps	<input type="checkbox"/> Sand Filter Systems
	<input type="checkbox"/> Sediment Basins	<input checked="" type="checkbox"/> Grassy Swales

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required Required Action

Action No.

-
-
-
-

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required Required Action

Action No.

- Vegetation BMPs in Section 7 of the General Notes.
-
-
-

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

- No Action Required Required Action

Action No.

1. The contractor's attention is directed to the fact that there is the possibility that migratory birds may be nesting on existing structures within the project limits. The contractor shall remove all old migratory bird nests from any structures between September 1 and January 31 while the nests are not occupied by a bird. In addition, the contractor must be prepared to prevent migratory birds from re-nesting between February and August. All methods must be approved by the Austin District Biologist well in advance of planned use.

2. See Invasive Species BMPs in Section 7 of the General Notes.

3. See Aquatic Amphibian and Reptile BMPs in Section 7 of the General Notes.

If any of the listed species are observed, cease work in the immediate area, do not disturb species or habitat and contact the Engineer immediately. The work may not remove active nests from bridges and other structures during nesting season of the birds associated with the nests. If caves or sinkholes are discovered, cease work in the immediate area, and contact the Engineer immediately.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):

Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used. Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act. Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- * Dead or distressed vegetation (not identified as normal)
- * Trash piles, drums, canister, barrels, etc.
- * Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required Required Action

Action No.

1. Existing steel beams have hazardous materials (lead-containing paint) and the contractor is responsible for safe handling, disposal, and protection of workers and environment. Provide a bridge demolition plan to the Engineer at least 30 calendar days prior to beginning bridge removal. Identify all proposed cut points to be abated by others, prior to beginning bridge demolition. Contact Engineer for copies of hazardous material report. Dispose of steel at a steel recycling or smelting facility per Standard Specification Item 6.10.2.


VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

- No Action Required Required Action

Action No.

- See General Design and Construction BMPs in Section 7 of the General Notes.
- See Water Quality BMPs in Section 7 of the General Notes.

 Texas Department of Transportation		Design Division Standard		
<h2 style="margin: 0;">ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS</h2> <h1 style="margin: 0;">EPIC</h1>				
FILE: epic.dgn	DN: TxDOT	CK: RG	DW: VP	CK: AR
©TxDOT: February 2015	CONT	SECT	JOB	HIGHWAY
12-12-2011 (DS) REVISIONS	0914	05	137	CR 126
05-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY	SHEET NO.	
01-23-2015 SECTION I. CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	AUS	WILLIAMSON	42	

DATE: 9/28/2023 9:07:47 AM
 FILE: P:\work\projects\2023\09\07\09137\01-0553\01\plan_Swp3\SWP3.dgn

STORMWATER POLLUTION PREVENTION PLAN (SW3P):

2.0 BEST MANAGEMENT PRACTICES (BMPs) AND CONTROLS, INSPECTION, AND MAINTENANCE

The Contractor shall be the responsible party for implementing the BMPs described herein and for complying with the SW3P for control of erosion and sedimentation during day-to-day operations. The Contractor shall implement changes to this SW3P approved by TxDOT within the times specified in this SW3P or the CGP.

2.1 EROSION CONTROL AND SOIL STABILIZATION BMPs:

- T / P
- Protection of Existing Vegetation
 - Vegetated Buffer Zones
 - Soil Retention Blankets
 - Geotextiles
 - Mulching/ Hydromulching
 - Soil Surface Treatments
 - Temporary Seeding
 - Permanent Planting, Sodding or Seeding
 - Biodegradable Erosion Control Logs
 - Rock Filter Dams/ Rock Check Dams
 - Vertical Tracking
 - Interceptor Swale
 - Riprap
 - Diversion Dike
 - Temporary Pipe Slope Drain
 - Embankment for Erosion Control
 - Paved Flumes
 - Other: Channel Liners
 - Other: Rock Bedding at construction exit
 - Other: _____
 - Other: _____

2.2 SEDIMENT CONTROL BMPs:

- T / P
- Biodegradable Erosion Control Logs
 - Dewatering Controls
 - Inlet Protection
 - Rock Filter Dams/ Rock Check Dams
 - Sandbag Berms
 - Sediment Control Fence
 - Stabilized Construction Exit
 - Floating Turbidity Barrier
 - Vegetated Buffer Zones
 - Vegetated Filter Strips
 - Other: _____
 - Other: _____
 - Other: _____
 - Other: _____

Refer to the Environmental Layout Sheets/ SW3P Layout Sheets located in Attachment 1.2 of this SW3P

2.3 PERMANENT CONTROLS:

(Coordinate post-construction BMPs with appropriate TxDOT maintenance sections.)
 BMPs To Be Left In Place Post Construction:

Type	Stationing	
	From	To
N/A		

Refer to the Environmental Layout Sheets/ SW3P Layout Sheets located in Attachment 1.2 of this SW3P

2.4 OFFSITE VEHICLE TRACKING CONTROLS:

- Excess dirt/mud on road removed daily
- Haul roads dampened for dust control
- Loaded haul trucks to be covered with tarpaulin
- Stabilized construction exit
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.5 POLLUTION PREVENTION MEASURES:

- Chemical Management
- Concrete and Materials Waste Management
- Debris and Trash Management
- Dust Control
- Sanitary Facilities
- Other: _____
- Other: _____
- Other: _____
- Other: _____

2.6 VEGETATED BUFFER ZONES:

Natural vegetated buffers shall be maintained as feasible to protect adjacent surface waters. If vegetated natural buffer zones are not feasible due to site geometry, the appropriate additional sediment control measures have been incorporated into this SW3P.

Type	Stationing	
	From	To
N/A		

Refer to the Environmental Layout Sheets/ SW3P Layout Sheets located in Attachment 1.2 of this SW3P

2.7 ALLOWABLE NON-STORMWATER DISCHARGES:

- Fire hydrant flushings
- Irrigation drainage
- Pavement washwater (where spills or leaks have not occurred, and detergents are not used)
- Potable water sources
- Springs
- Untaminated groundwater
- Water used to wash vehicles or control dust
- Other allowable non-stormwater discharges as allowed by TPDES GP TXR150000.

2.8 INSPECTIONS:

All disturbed areas and erosion and sediment control devices shall be inspected at least once every seven (7) days. Inspections shall be performed by TxDOT as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SW3P.

2.9 MAINTENANCE:

Control measures shall be properly installed according to specifications. If it is determined that a BMP or control measure is not operating effectively, maintenance must be accomplished as soon as possible and before the next anticipated rain event, but in no case later than 7 calendar days after being able to access the site. Maintenance shall be performed by the Contractor as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SW3P.

DocuSigned by:
Amro Gaber
 DAD0168DA9D443D...
 9/28/2023



**Austin District
Portfolio Production Group**

© TxDOT 2023

Texas Department of Transportation



CR 126

**STORMWATER POLLUTION PREVENTION PLAN (SWP3)
(Less Than 1 Acre)**

SHEET 2 OF 2

CONT	SECT	JOB	HIGHWAY
0914	05	137	CR 126
DIST		COUNTY	SHEET NO.
AUS		WILLIAMSON	44

DATE: 9/28/2023 8:23:27 AM
 FILE: P:\txdot\projectwiseonline.com\txdot\Documents\14 - AUS\Design Projects\091405137\4 - Design\Plan Set\9. Environmental\CR0126_ENV_LAYOUT.dgn

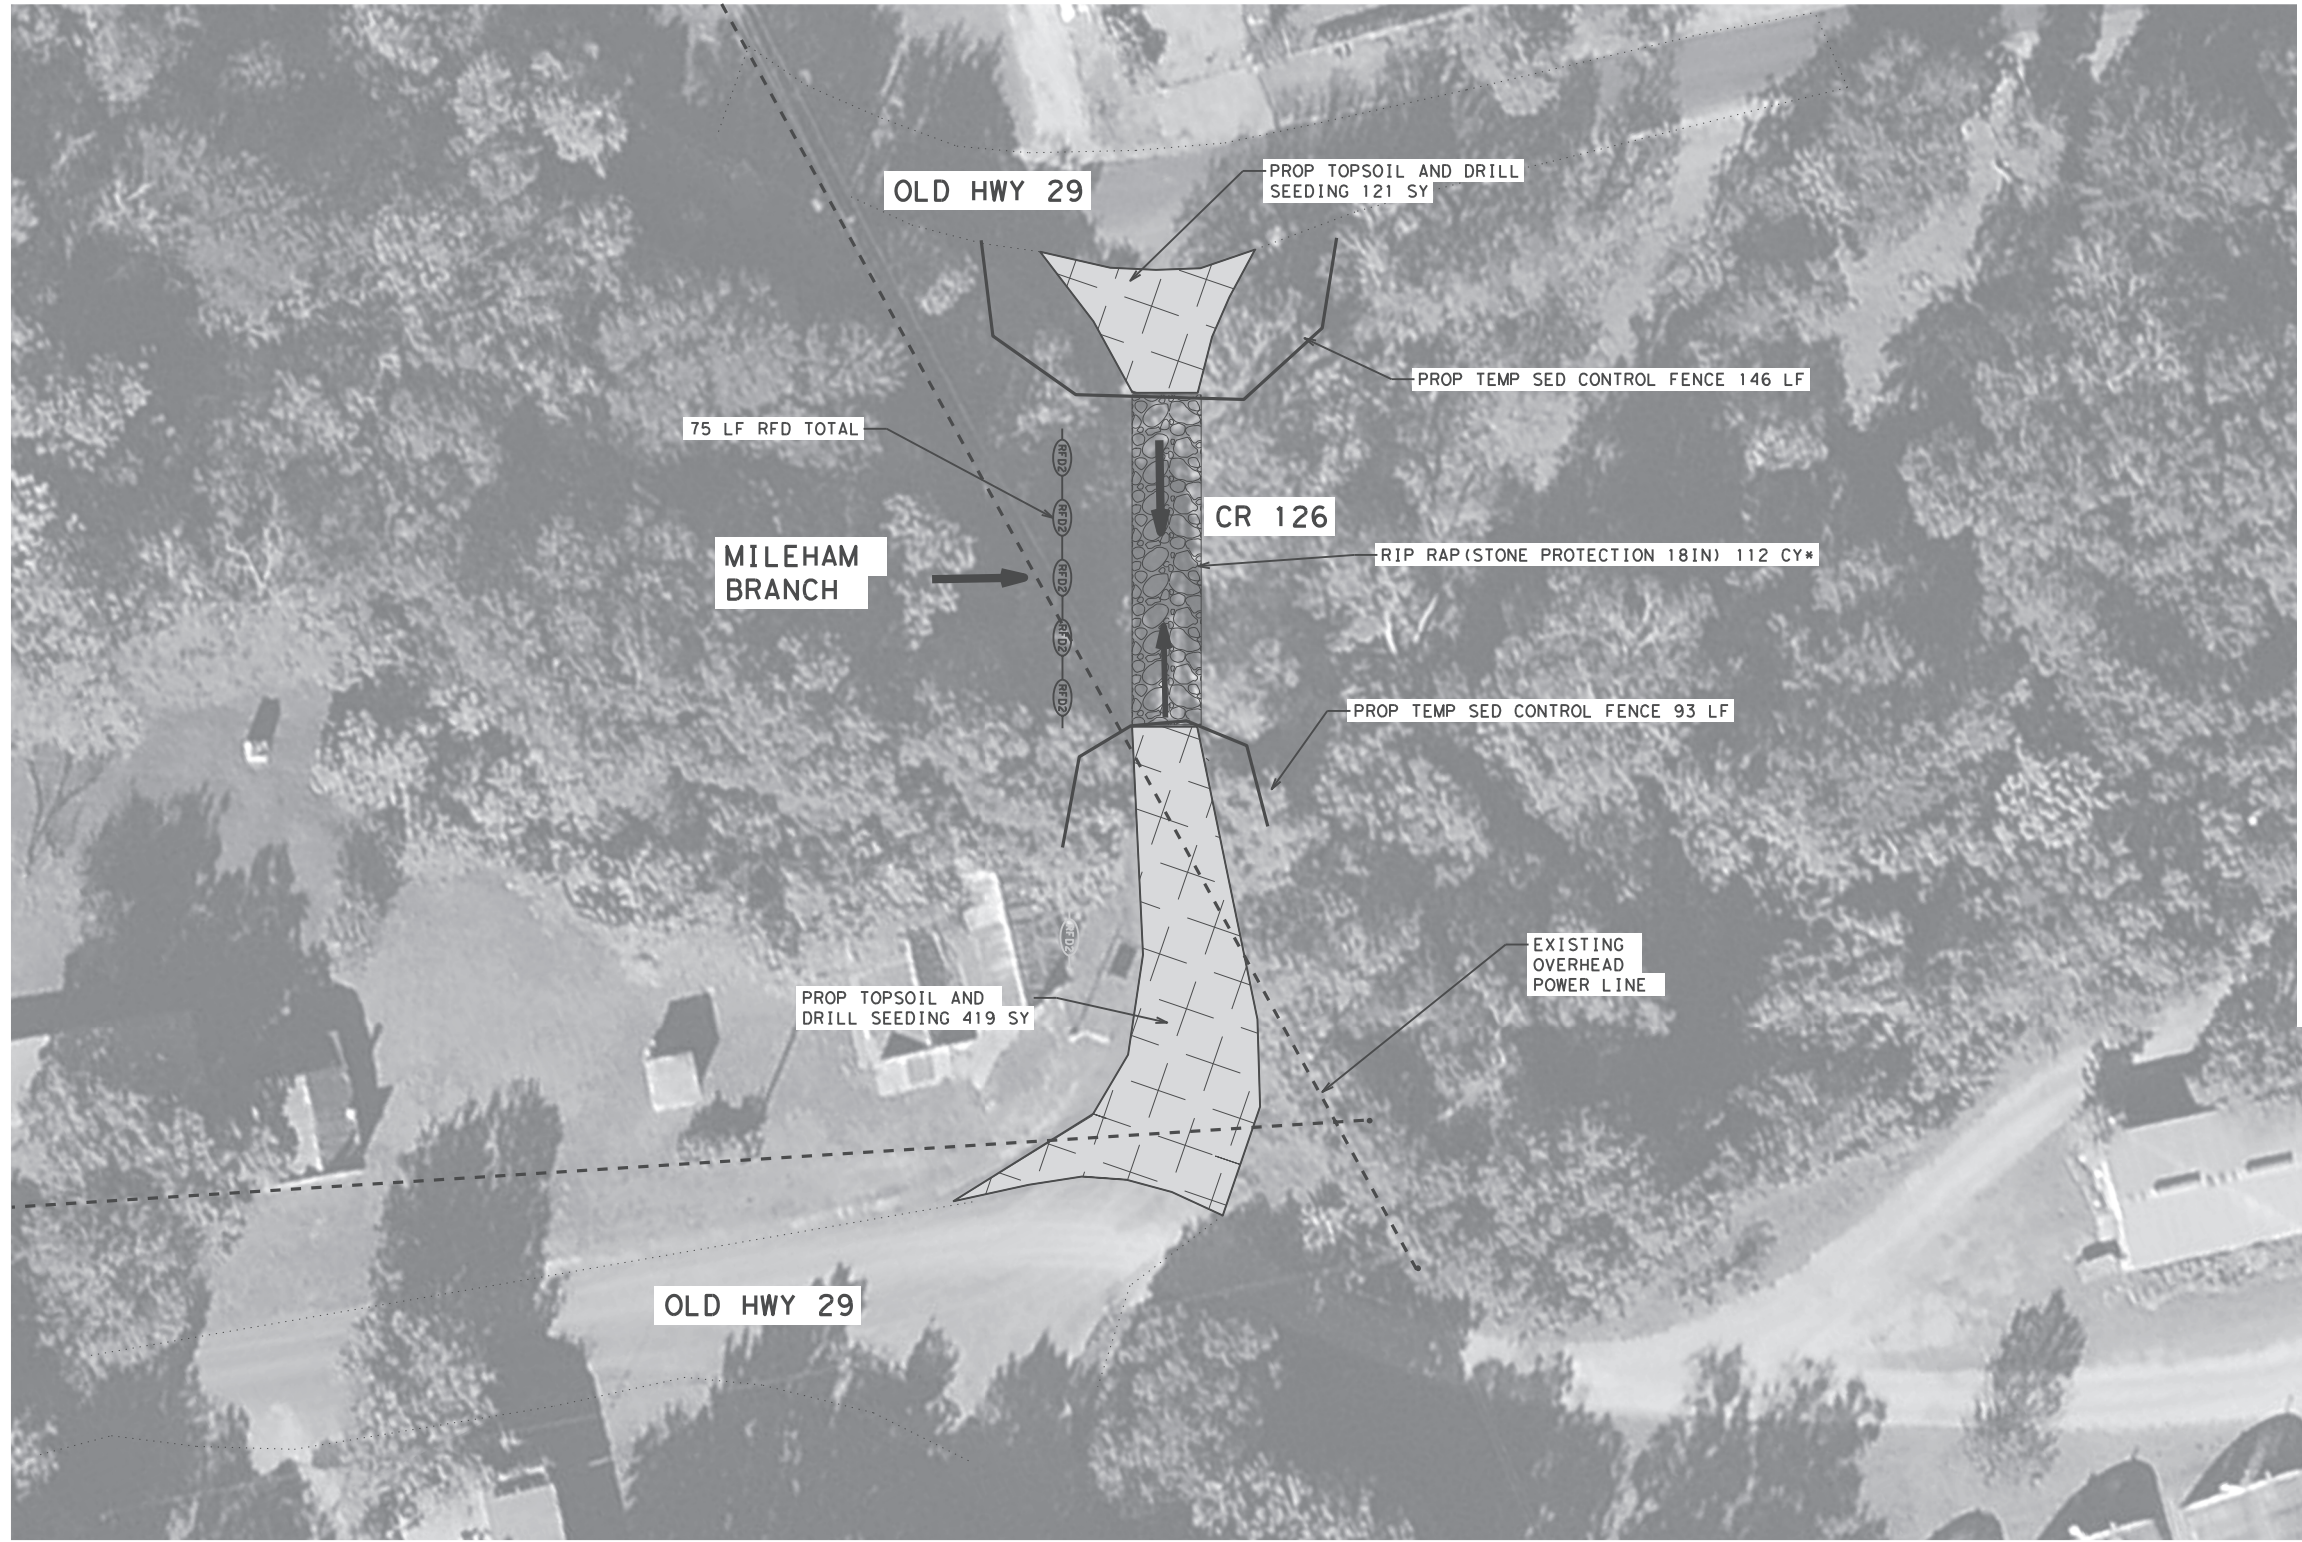

•PLACE STONE RIP RAP PROTECTION IN THE PREVIOUS AREA OF THE BRIDGE FOOT PRINT WHICH SHOULD COVER PREVIOUS LOCATION OF ABUTMENT BACK WALL AND BENTS.

DocuSigned by:
Amro Gaber
 DAD0168DA9D443D...

9/28/2023



LEGEND

- SEDIMENT CONTROL FENCE
- ▨ TOPSOIL & SEEDING
- FLOW DIRECTION ARROW

SCALE (IN FEET):
 0 ————— 50

**Austin District
 Central Design**


Texas Department of Transportation

**CR 126 AT MILEHAM BR
 EROSION CONTROL
 LAYOUT**

SHEET 1 OF 1


© 2023	CONT	SECT	JOB	HIGHWAY
DS: CK:	0914	05	137	CR 126
DW: CK:	DIST		COUNTY	SHEET NO.
	AUS		WILLIAMSON	45

DATE: 9/26/2023 7:16:35 AM
 FILE: \\tcdotprojectwiseonline.com\TxDOT\Documents\14 - AUS - Standards\Standard\State\EC(2)-16\9/26/2023\14-AUS-2023-09-26-07:16:35-AM-Filter Dams.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard into a computer program or any other format.

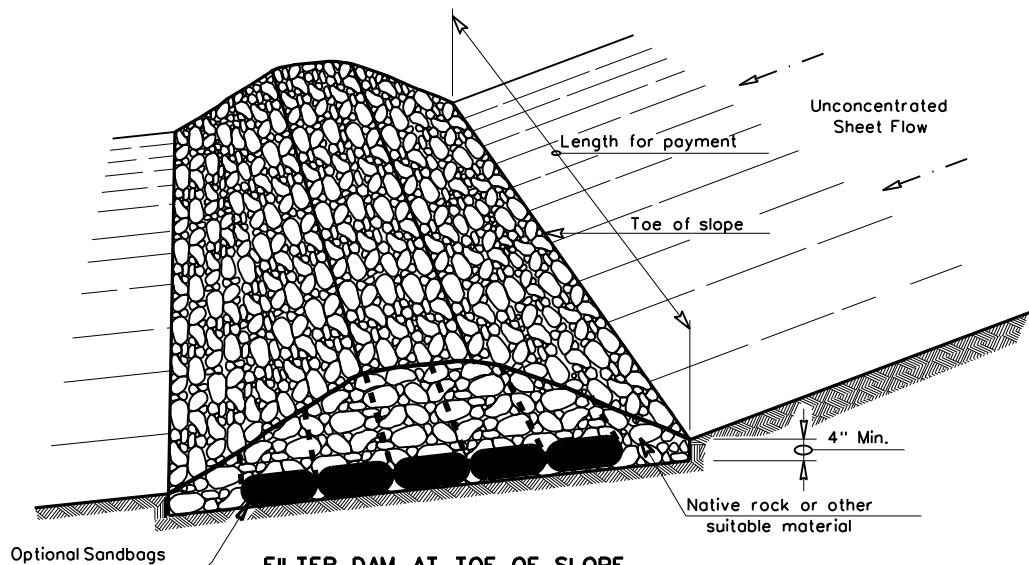


FILTER DAM AT TOE OF SLOPE

(RFD1)

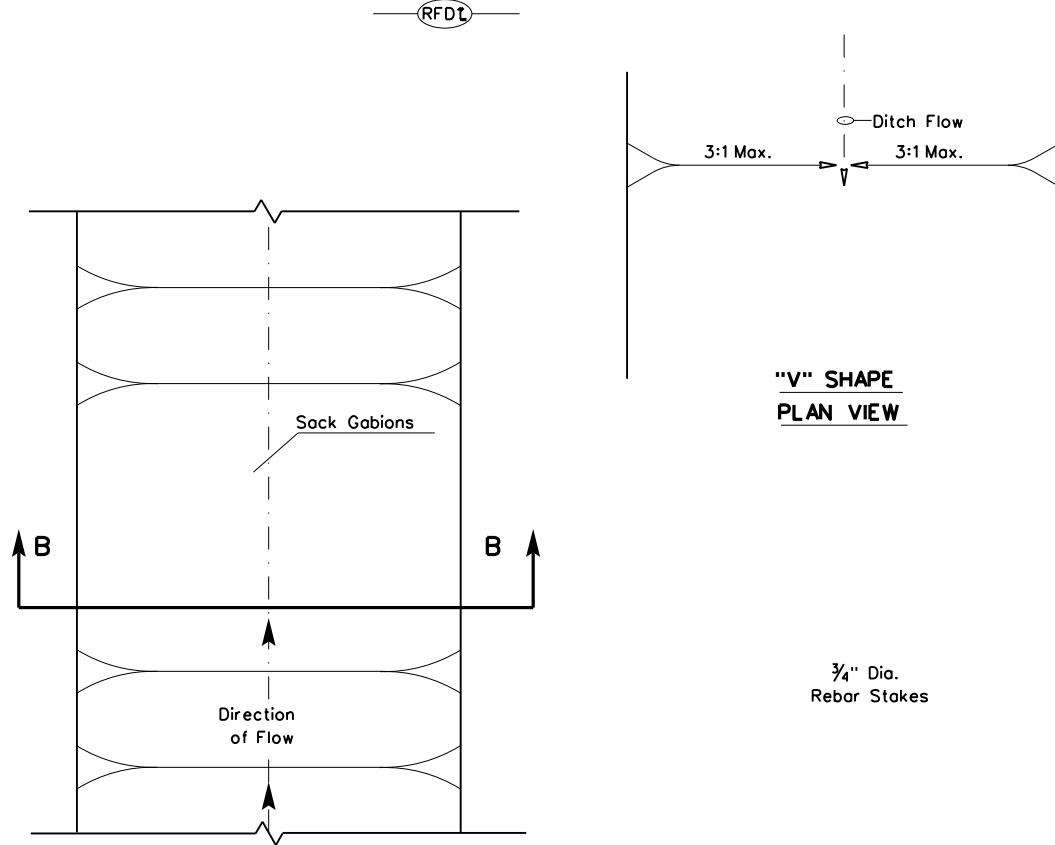


"V" SHAPE PLAN VIEW

PLAN VIEW

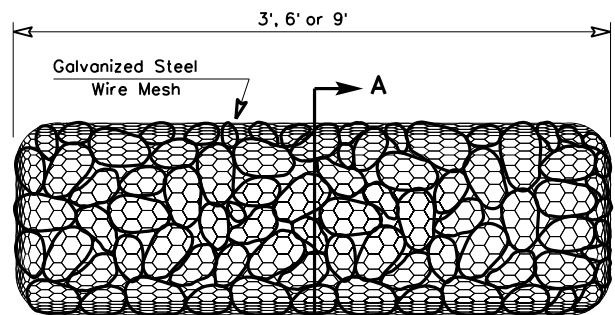


TYPE 4 (SACK GABIONS)

(RFD4)

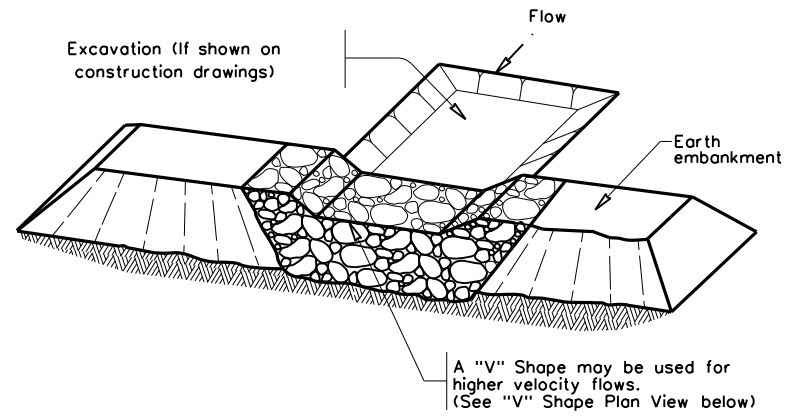


FILTER DAM AT SEDIMENT TRAP

(RFD1) OR (RFD2)

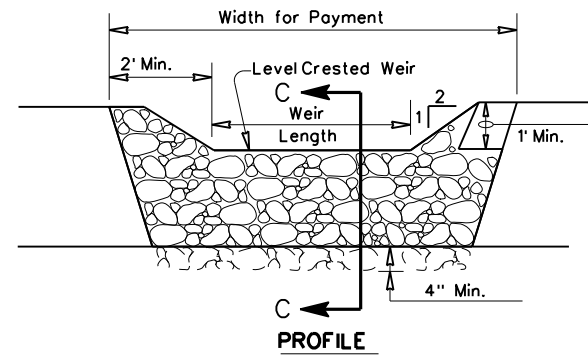

PROFILE

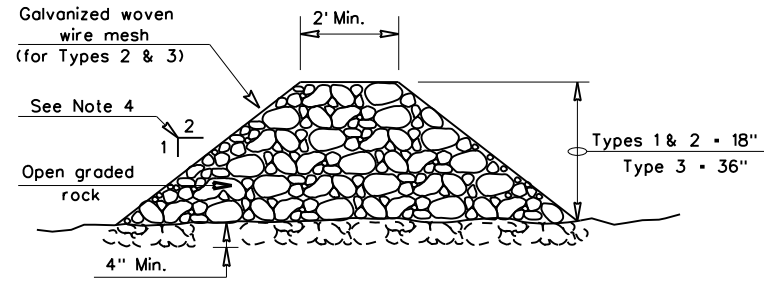

SECTION C-C

ROCK FILTER DAM USAGE GUIDELINES

Rock Filter Dams should be constructed downstream from disturbed areas to intercept sediment from overland runoff and/or concentrated flow. The dams should be sized to filter a maximum flow through rate of 60 GPM/FT² of cross sectional area. A 2 year storm frequency may be used to calculate the flow rate.


Type 1 (18" high with no wire mesh) (3" to 6" aggregate): Type 1 may be used at the toe of slopes, around inlets, in small ditches, and at dike or swale outlets. This type of dam is recommended to control erosion from a drainage area of 5 acres or less. Type 1 may not be used in concentrated high velocity flows (approximately 8 Ft/Sec or more) in which aggregate wash out may occur. Sandbags may be used at the embedded foundation (4" deep min.) for better filtering efficiency of low flows if called for on the plans or directed by the Engineer.

Type 2 (18" high with wire mesh) (3" to 6" aggregate): Type 2 may be used in ditches and at dike or swale outlets.

Type 3 (36" high with wire mesh) (4" to 8" aggregate): Type 3 may be used in stream flow and should be secured to the stream bed.

Type 4 (Sack gabions) (3" to 6" aggregate): Type 4 May be used in ditches and smaller channels to form an erosion control dam.

Type 5: Provide rock filter dams as shown on plans.

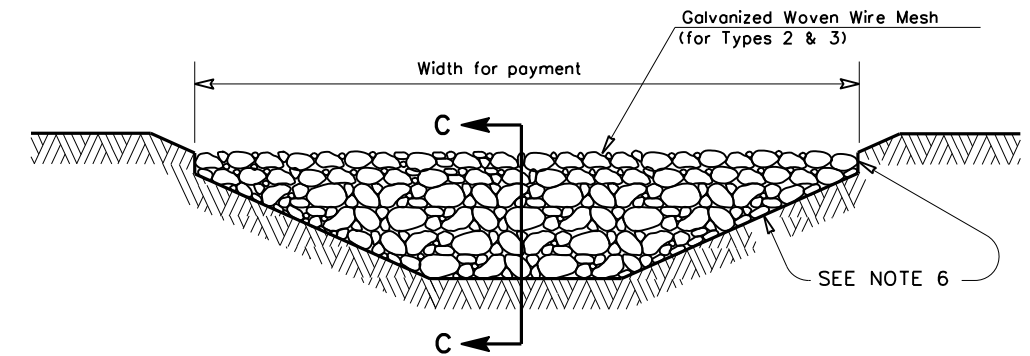

FILTER DAM AT CHANNEL SECTIONS

(RFD1) OR (RFD2) OR (RFD3)

GENERAL NOTES

1. If shown on the plans or directed by the Engineer, filter dams should be placed near the toe of slopes where erosion is anticipated, upstream and/or downstream at drainage structures, and in roadway ditches and channels to collect sediment.
2. Materials (aggregate, wire mesh, sandbags, etc.) shall be as indicated by the specification for "Rock Filter Dams for Erosion and Sedimentation Control".
3. The rock filter dam dimensions shall be as indicated on the SW3P plans.
4. Side slopes should be 2:1 or flatter. Dams within the safety zone shall have sideslopes of 6:1 or flatter.
5. Maintain a minimum of 1' between top of rock filter dam weir and top of embankment for filter dams at sediment traps.
6. Filter dams should be embedded a minimum of 4" into existing ground.
7. The sediment trap for ponding of sediment laden runoff shall be of the dimensions shown on the plans.
8. Rock filter dam types 2 & 3 shall be secured with 20 gauge galvanized woven wire mesh with 1" diameter hexagonal openings. The aggregate shall be placed on the mesh to the height & slopes specified. The mesh shall be folded at the upstream side over the aggregate and tightly secured to itself on the downstream side using wire ties or hog rings. For in stream use, the mesh should be secured or staked to the stream bed prior to aggregate placement.
9. Sack Gabions should be staked down with 3/4" dia. rebar stakes, and have a double-twisted hexagonal weave with a nominal mesh opening of 2 1/2" x 3 1/4".
10. Flow outlet should be onto a stabilized area (vegetation, rock, etc.).
11. The guidelines shown hereon are suggestions only and may be modified by the Engineer.

PLAN SHEET LEGEND

- Type 1 Rock Filter Dam — (RFD1)
- Type 2 Rock Filter Dam — (RFD2)
- Type 3 Rock Filter Dam — (RFD3)
- Type 4 Rock Filter Dam — (RFD4)


**TEMPORARY EROSION,
 SEDIMENT AND WATER
 POLLUTION CONTROL MEASURES**
ROCK FILTER DAMS
EC(2)-16

Design Division Standard


FILE: ec216	DN: TxDOT	CK: KM	DW: VP	DN/CK: LS
© 2023 JULY 2016		CONT SECT	JOB	HIGHWAY
REVISIONS		0914 05	137	CR 126
	DIST	COUNTY	SHEET NO.	
	AUS	WILLIAMSON	47	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this standard or for any damages resulting from its use.


9/26/2023 7:16:40 AM
 pwt://txdotprojectwiseonline.com/1x00T4/Documents/14 - AUS_Standards/Statewide Standards/EC(9)-16

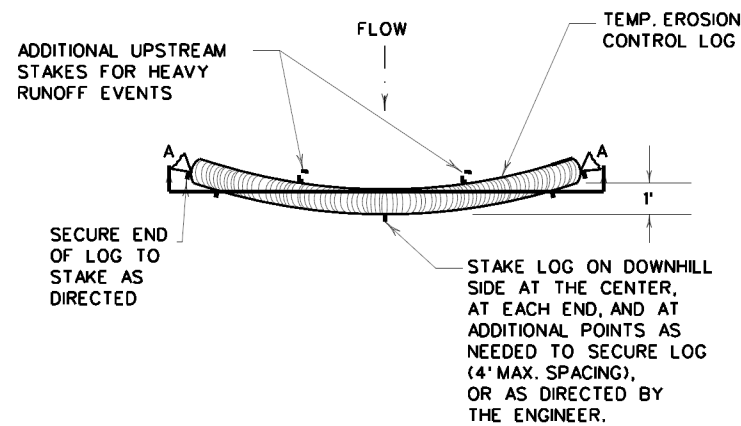


PLAN VIEW

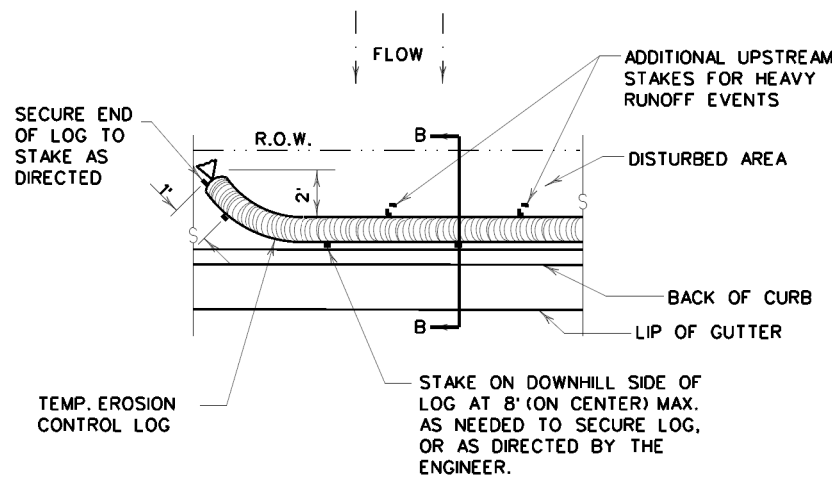

PLAN VIEW

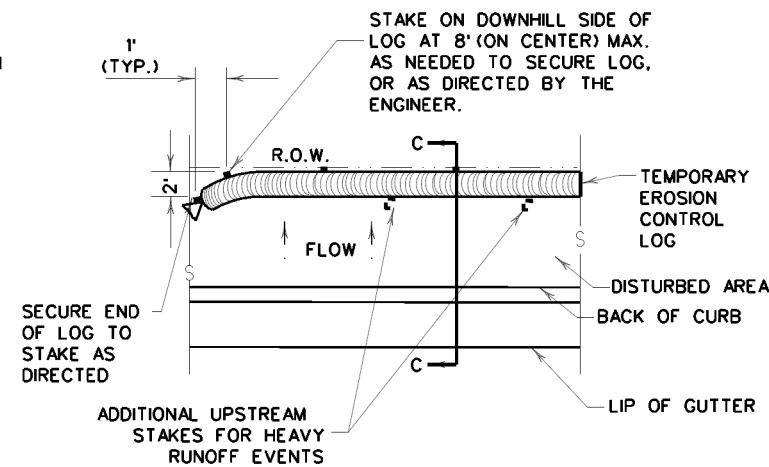


PLAN VIEW

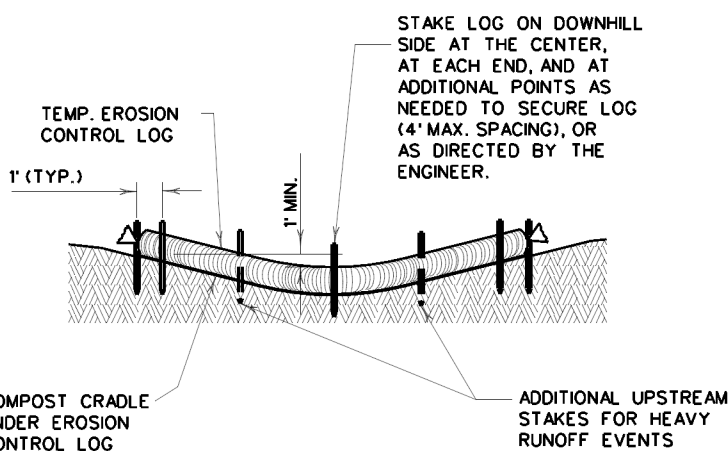

SECTION A-A

EROSION CONTROL LOG DAM


CL-D

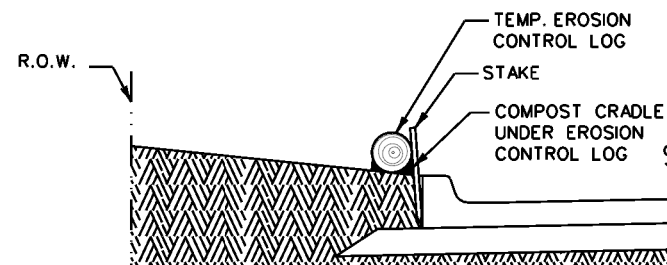

SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB


CL-BOC

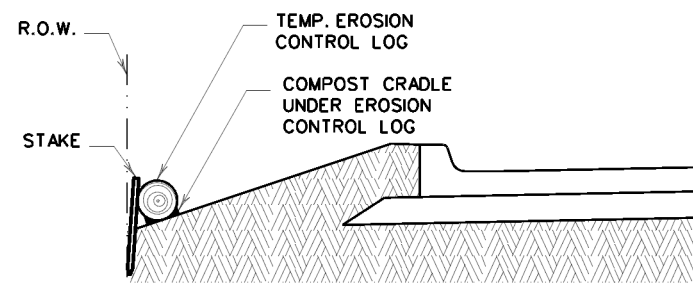


SECTION C-C

EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

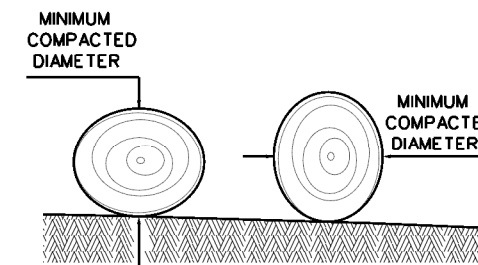

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS



REBAR STAKE DETAIL

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Controllogs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

GENERAL NOTES:


1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4" LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

- CL-D EROSION CONTROL LOG DAM
- CL-BOC EROSION CONTROL LOG AT BACK OF CURB
- CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
- CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
- CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
- CL-DI EROSION CONTROL LOG AT DROP INLET
- CL-CI EROSION CONTROL LOG AT CURB INLET
- CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET

SHEET 1 OF 3


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT: 0914	SECT: 05	JOB: HIGHWAY
REVISIONS	0914	137	CR 126
DIST: AUS	COUNTY: WILLIAMSON	SHEET NO. 48	

9/26/2023 7:16:45 AM
 p:\t\project\project\line.com\1\DOT4\Documents\14 - AUS_Standards\Statewide Standards\erosion_control_logs\erosion_control_logs.dwg
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any damages resulting from its use.

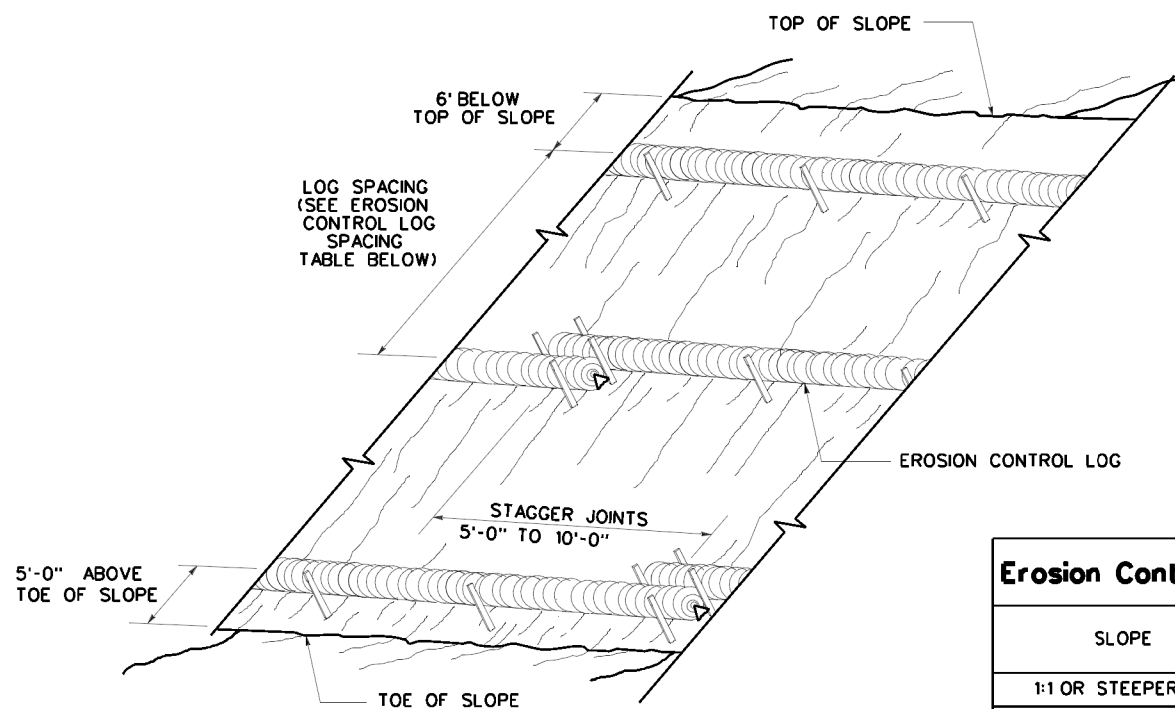

EROSION CONTROL LOGS ON SLOPES
STAKE AND TRENCHING ANCHORING


CL-SST

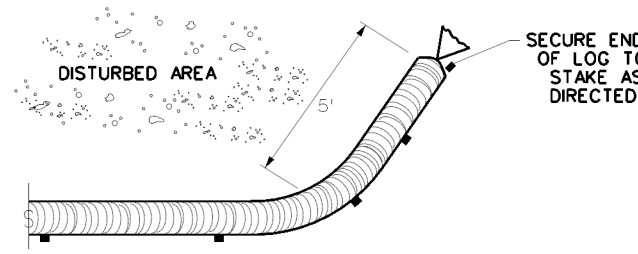

END SECTION RAP DETAIL


SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

• ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

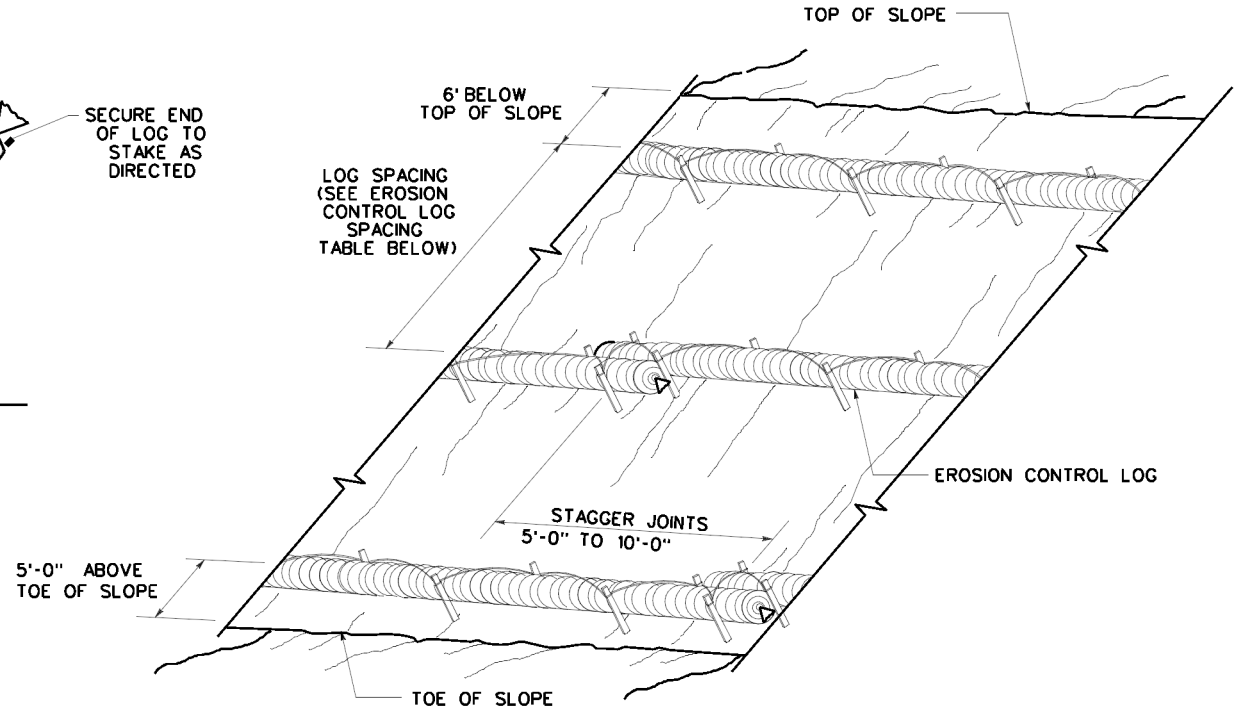


EROSION CONTROL LOGS ON SLOPES
STAKE AND LASHING ANCHORING

CL-SSL

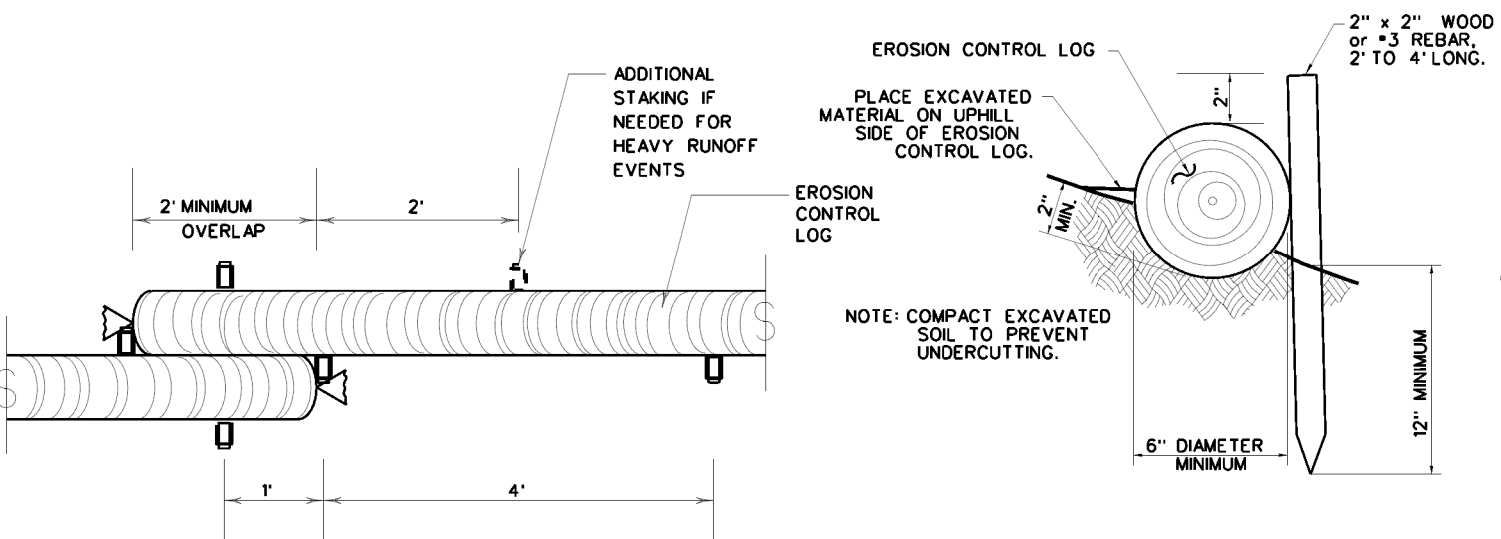

STAKE AND TRENCHING ANCHORING DETAIL


CL-SST

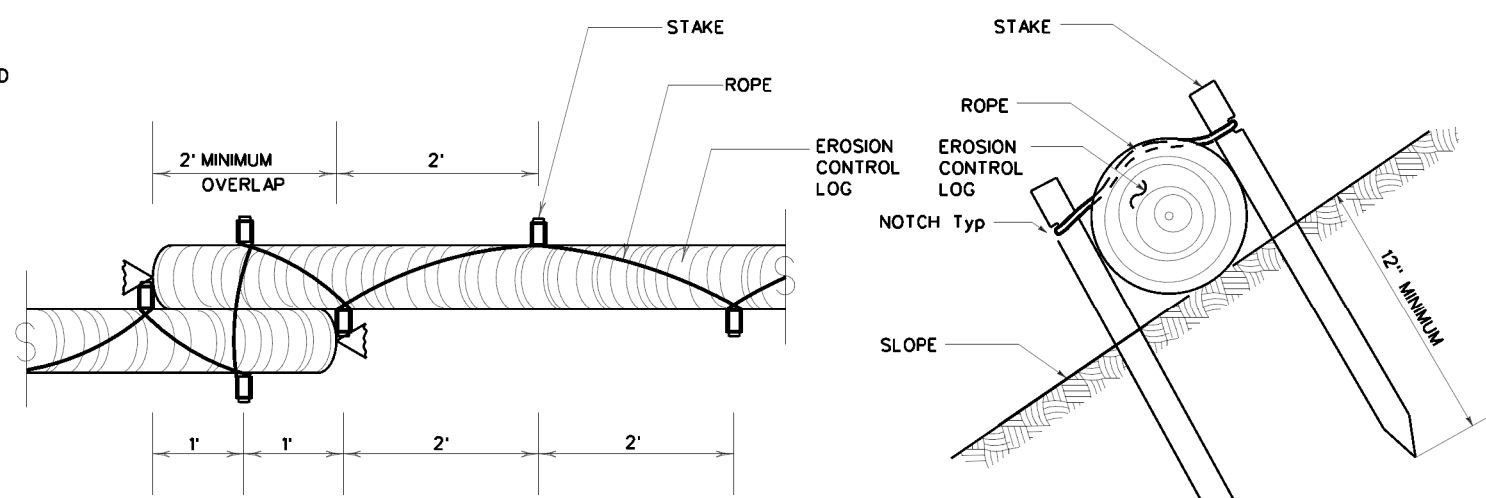

STAKE AND LASHING ANCHORING DETAIL

CL-SSL

LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"




STAKE NOTCH DETAIL

SHEET 2 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT: 0914	SECT: 05	JOB: 137
REVISIONS	DIST: AUS	COUNTY: WILLIAMSON	HIGHWAY: CR 126
			SHEET NO. 49


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions that may appear in this standard.

9/26/2023 7:16:52 AM
 pw://ttdot-projectwiseonline.com/1x0014/Documents/14 - AUS/_Standards/Statewide Standards/EC(9)-16

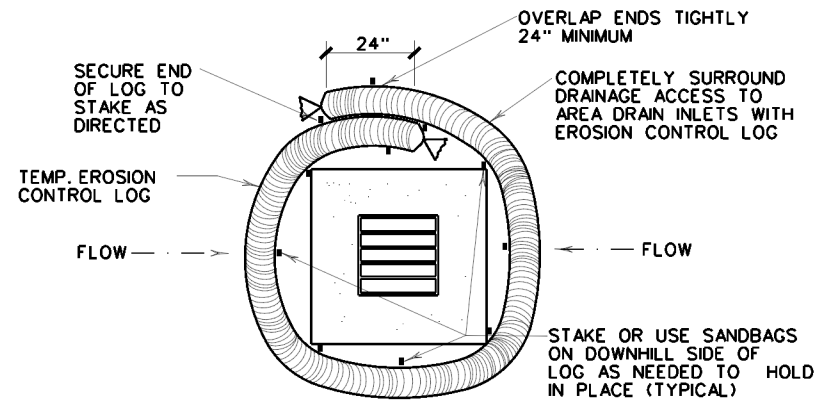


EROSION CONTROL LOG AT DROP INLET

CL-DI

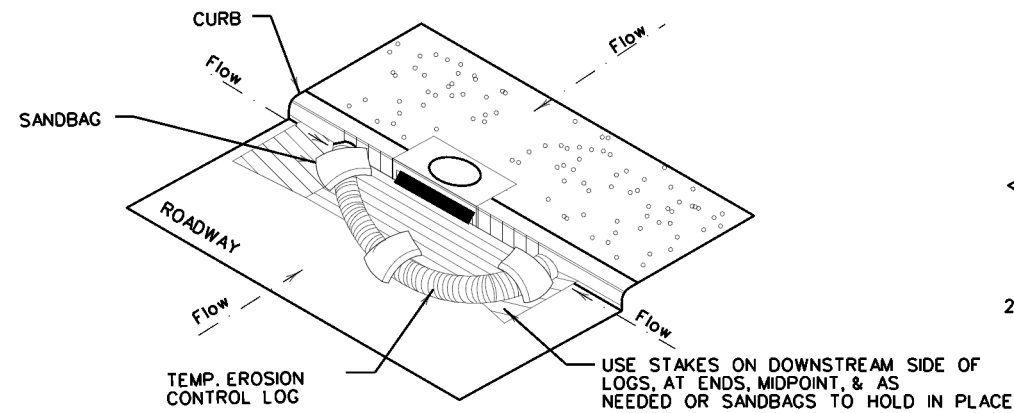

EROSION CONTROL LOG AT CURB INLET


CL-CI

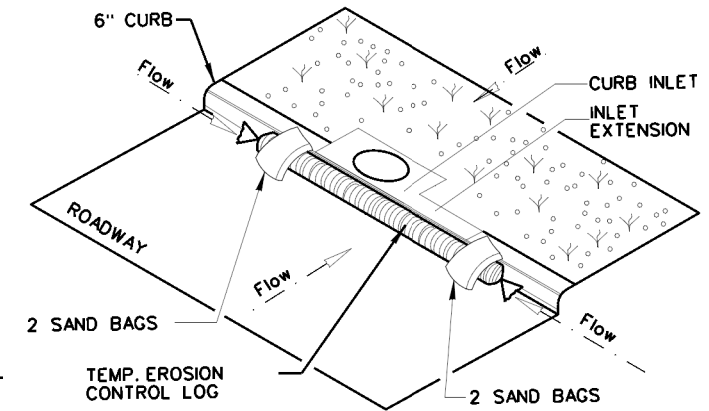

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

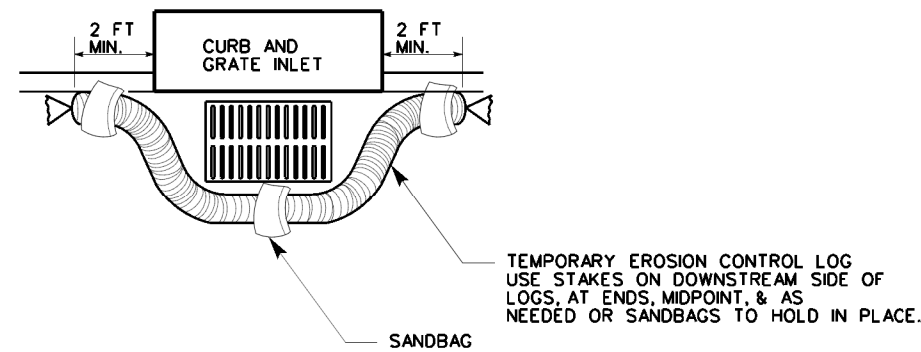

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

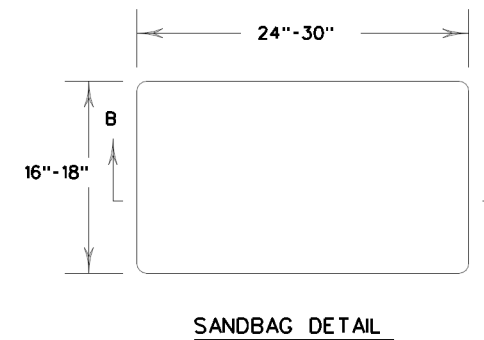

SHEET 3 OF 3

		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9)-16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT: 0914	SECT: 05	JOB: 137
REVISIONS			HIGHWAY: CR 126
DIST: AUS	COUNTY: WILLIAMSON	SHEET NO.: 50	