

SEE SHEET 2 FOR INDEX OF SHEETS

# STATE OF TEXAS DEPARTMENT OF TRANSPORTATION



PROJECT NO.		SHEET NO.	
RMC 642135001		1	
STATE	DIST.	COUNTY	
TEXAS	WFS	MONTAGUE, ETC.	
CONT.	SECT.	JOB	HIGHWAY NO.
6421	35	001	US 287, ETC.

## PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT

PROJECT NO. : RMC 642135001  
CONTROL SECTION JOB : 6421-35-001  
MONTAGUE COUNTY, ETC  
US 287, ETC.


FOR THE ROUTINE MAINTENANCE WORK CONSISTING OF METAL BEAM GUARD FENCE UPGRADE  
WORK CONSISTING OF REMOVING/INSTALLING MBGF, MOWSTRIP, SEEDING  
AND WATERING


CONTRACTOR NAME: \_\_\_\_\_  
CONTRACTOR ADDRESS: \_\_\_\_\_  
LETTING DATE: \_\_\_\_\_  
DATE WORK BEGAN: \_\_\_\_\_  
DATE WORK COMPLETED: \_\_\_\_\_  
DATE OF ACCEPTANCE: \_\_\_\_\_

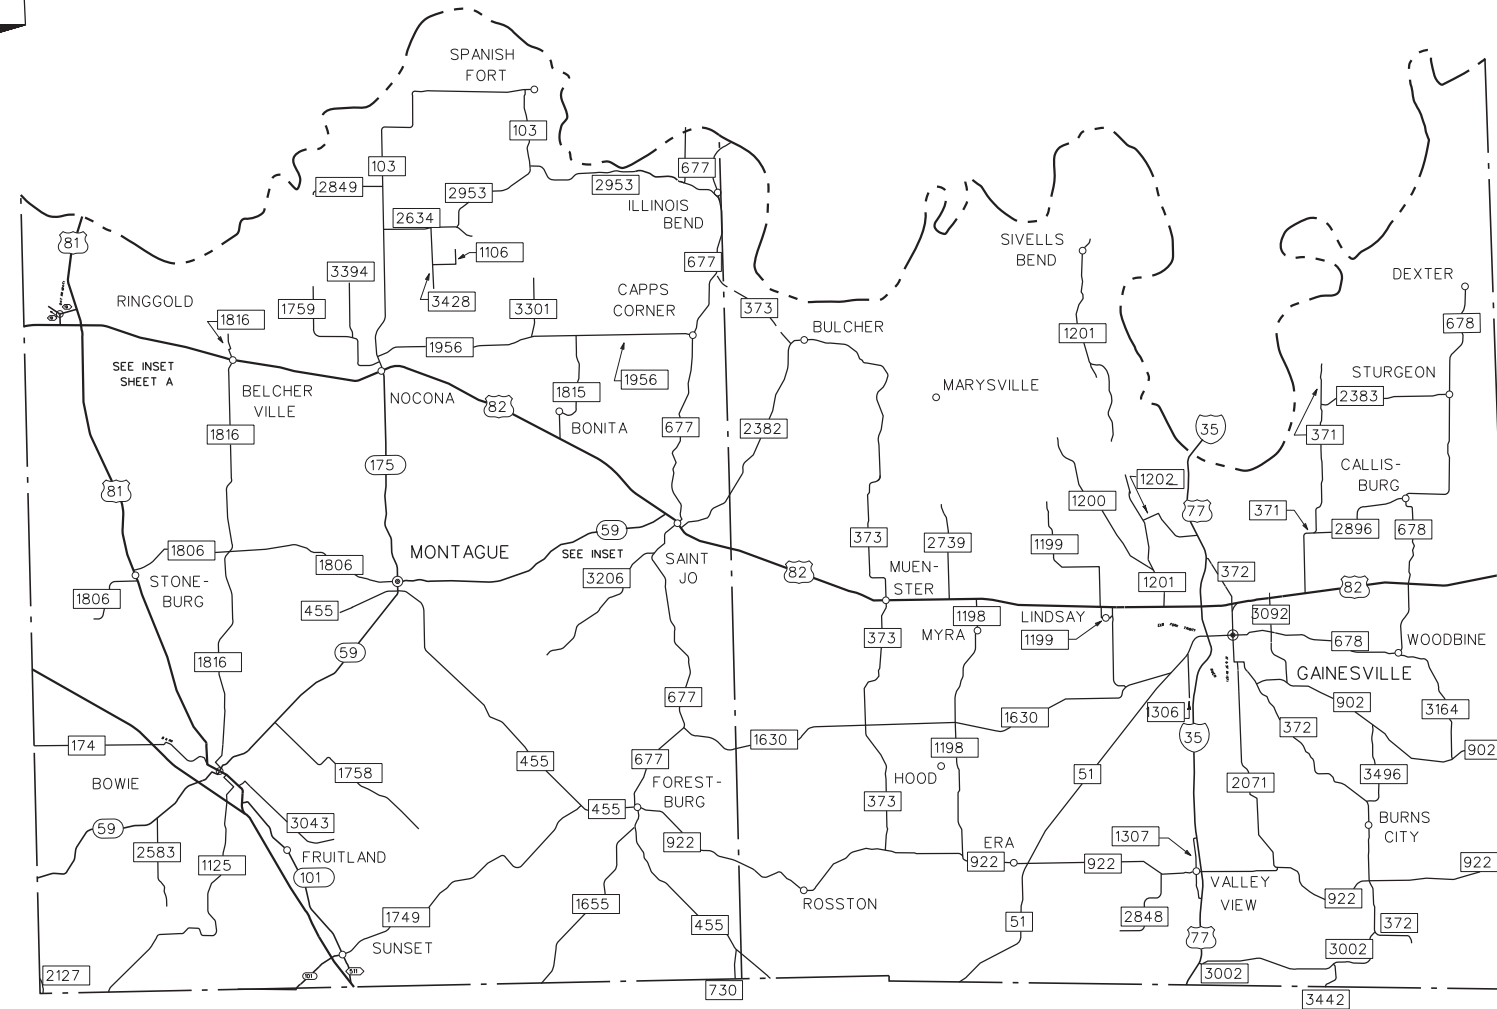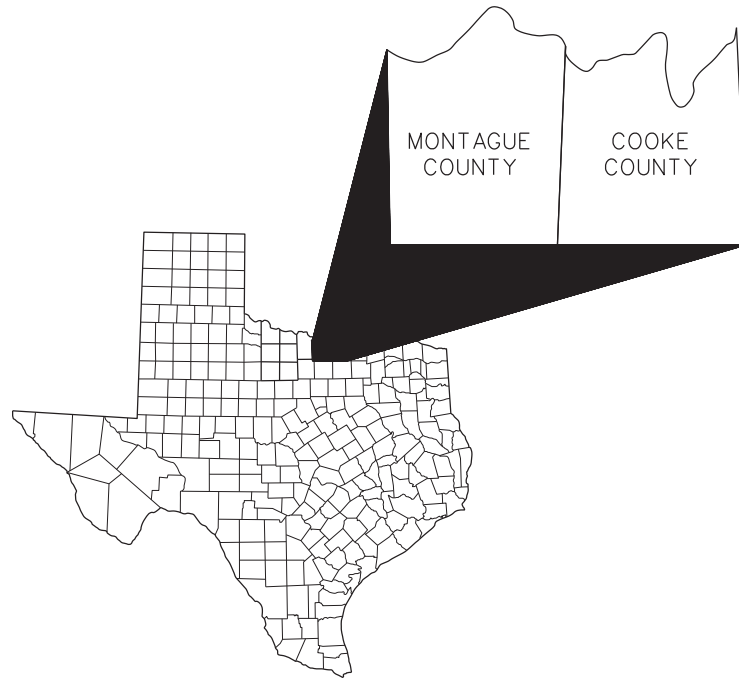


SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF  
TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIFICATION ITEMS  
LISTED SHALL GOVERN ON THIS PROJECT.

NOT TO SCALE  
NO EXCEPTIONS  
NO EQUATIONS  
NO RAILROAD CROSSINGS

SUBMITTED FOR LETTING 12/21/2023  
  
 MAINTENANCE ENGINEER

RECOMMENDED FOR LETTING 12/21/2023  
  
 DISTRICT DIRECTOR OF OPERATIONS


RECOMMENDED FOR LETTING 12/21/2023  
  
 DISTRICT ENGINEER

FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024\4 - Design\Master Design File\TITLESHEET.dgn  
DATE: 12/21/2023

# INDEX OF SHEETS

SHEET NO.	DESCRIPTION	SHEET NO.	DESCRIPTION
1	TITLE SHEET		
2	INDEX OF SHEETS		
3-5	GENERAL NOTES	** 51	<u>ROADWAY DETAILS STANDARDS</u>
6-7	ESTIMATE & QUANTITY	52-53	BED-14
8-10	QUANTITY SUMMARY	** 54	C-RAIL-R (MOD)
11	CRASH CUSHION SUMMARY SHEET	** 55	GF(31)LS-19
		** 56	GF(31)MS-19
	<u>TRAFFIC CONTROL PLAN</u>	** 57-58	GF(31)TR TL3-20
12	TCP PHASING DETAIL 1	59	MBGF(SR)-19 (MOD)
13	TCP PHASING DETAIL 2	** 60	REACT(M)-21
		** 61	SMTC(N)-16
	<u>TRAFFIC CONTROL PLAN STANDARDS</u>	** 62	ABSORB(M)-19
** 14	BC (1)-21	** 63	SLED-19
** 15	BC (2)-21	64	T2T201TR-19 (MOD)
** 16	BC (3)-21	65	T202TR-19 (MOD)
** 17	BC (4)-21	** 66	SGT(10S)31-16
** 18	BC (5)-21	** 67	SGT(11S)31-18
** 19	BC (6)-21	** 68	SGT(12S)31-18
** 20	BC (7)-21	** 69	SGT(13S)31-18
** 21	BC (8)-21	** 70	SGT(15)31-20
** 22	BC (9)-21	** 71-72	SSTR
** 23	BC (10)-21	73	EMBANKMENT DETAIL
** 24	BC (11)-21		
** 25	BC (12)-21	** 74	<u>PAVEMENT MARKINGS &amp; DELINEATION STANDARDS</u>
** 26	TCP (1-1)-18	** 75	D&OM (1)-20
** 27	TCP (1-2)-18	** 76	D&OM (2)-20
** 28	TCP (1-5)-18	** 77	D&OM (3)-20
** 29	TCP (2-1)-18	** 78	D&OM (4)-20
** 30	TCP (2-2)-18	** 79	D&OM (5)-20
** 31	TCP (2-6)-18		
** 32	TCP (6-1)-12		
** 33	TCP (PTS)		
** 34	WZ (RS)-22		
	<u>ROADWAY DETAILS</u>		
35	MONTAGUE COUNTY		
36	COOKE COUNTY		
37	REFERENCE #01		
38	REFERENCE #02		
39	REFERENCE #03		
40	REFERENCE #04		
41	REFERENCE #05		
42	REFERENCE #06		
43	REFERENCE #07		
44	REFERENCE #08		
45	REFERENCE #09		
46	REFERENCE #10		
47	REFERENCE #11		
48	REFERENCE #12		
49	REFERENCE #13		
50	REFERENCE #14		

DATE: 12/20/2023 4:47:01 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\INDEX OF SHEETS.dgn



THE STANDARD SHEETS SPECIFICALLY \*\* IDENTIFIED ON THIS SHEET HAVE BEEN ISSUED BY ME AND ARE APPLICABLE TO THIS PROJECT.

P.E. 12/21/2023  
 NAME DATE

US 287, ETC.  
INDEX OF SHEETS

Texas Department of Transportation® SHEET 1 OF 1			
CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		2

**GENERAL NOTES**

**Bid Item Specific General Notes**

**Basis of Estimate:**

<u>Item - Description</u>	<u>Rate*</u>	<u>Unit</u>
166 - Fertilizer	100 LB/Acre Nitrogen with a 3:1:1 ratio of N, P, K	LB
168 - Vegetative Watering	1.4 GAL/SY per Application every	MG

**General Requirements**

Contractor questions on this project are to be addressed to the following individual(s):

Colby Shelton, P.E.      [Colby.Shelton@txdot.gov](mailto:Colby.Shelton@txdot.gov)

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

**Item 4 - Scope of Work**

For the preconstruction conference submit a work schedule; material sources; the person responsible for the SW3P; written utility coordination plan; certification statements; request for proposed subcontractors and letters designating the project superintendent, safety officer, and payroll officer at the preconstruction conference.

**Item 5 - Control of the Work**

Provide the Engineer a minimum 24 hours' notice for work requiring inspection or testing.

**Item 6 - Control of Materials**

To comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, the contractor must submit a notarized original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product.

Refer to the Buy America Material Classification Sheet for clarification on material categorization.

The Buy America Material Classification Sheet is located at the below link.

<https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html> for clarification on material categorization.

**Item 7 - Legal Relations and Responsibilities**

No significant traffic generator events identified for this project.

The Contractor's responsible person as described in item 7.2.6.1 must be able to respond within 45 minutes of being notified.

**Item 8 - Prosecution and Progress**

Contract Time – The number of working days for this project shall be 106 days.

For this project, contract time will be computed as described in Item 8 based on a Standard Work Week (8.3.1.4).

Contractor shall begin work within 7 days after the authorization date to begin work in accordance with item 8.1.

County: MONTAGUE, ETC.

Control: 6421-35-001

Highway: US 287, ETC.

### Item Specific

#### **Item 104 – Removing Concrete**

The removal of concrete (mow strip) will be measured as Linear Feet in place before removal measured parallel along the longest side regardless of width and thickness.

#### **Item 132 - Embankment**

All borrow/aggregate sites shall meet the requirements of the Texas Aggregate Quarry and Pit Safety Act which can be found at <https://www.txdot.gov/business/resources/materials/aggregate-quarry-pit-safety.html>. This material shall consist of suitable earth material such as loam, clay or other materials that will form a stable embankment and be free from vegetation or other objectionable matter. Any embankment needed from a borrow pit must first be approved by the Engineer.

Windrow approximately 4” of existing grass and topsoil adjacent to the right of way line or vegetative buffer zone prior to beginning earthwork operations. Upon completion of earthwork operations scarify the slopes and ditches longitudinally to a depth of approximately 4 inches and return the windrowed material to the slopes and the ditches as a permanent erosion control measure. This work will not be paid for directly, but is considered subsidiary to the various bid items.

#### **Item 166 - Fertilizer**

Fertilize all areas of the project that are seeded.

#### **Item 168 - Vegetative Watering**

Water as directed by the Engineer all areas that receive seed to sustain grass growth to obtain a minimum 70% vegetative cover within the right of way. This may require the contractor to water the newly established grass for a period of up to three months after all other work on the contract is completed and before the project is accepted. Watering shall be done at times determined by the Engineer in order to minimize any loss due to evaporation.

#### **Item 432– Concrete Rip Rap**

Place mow strip at edge of pavement and cast at widths shown in the plans or as directed by the Engineer.

#### **Item 502 - Barricades, Signs, and Traffic Handling**

The Traffic Control Plan (TCP) for this project includes the plans, the Texas Manual on Traffic Control Devices, Barricade and Construction Standard Sheets, Standard TCP Sheets, and as otherwise required by the Engineer.

The Contractor's person responsible for TCP compliance is available by local telephone 24 hours a day and must respond to traffic control needs within 45 minutes of being notified.

Work will not be permitted without adequate traffic control devices in place. Work will only be

permitted on one side of the roadway at any time.

The Contractor Force Account “Safety Contingency” that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor’s Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Work vehicles within 30 feet of the traveled way shall have strobe lights or rotating beacons in use.

Wear appropriate personal protective equipment at all times while outside of vehicles and equipment on the project.

Provide adequate flagging on side roads to ensure that traffic flow is not compromised during one way traffic control operations.

Repair barricades within 48 hours after barricade report has been delivered to the Contractor. Failure to comply will cease all work until barricades are repaired to the satisfaction of the Department. Replace all damaged traffic control devices immediately. Remove any damaged traffic control devices from the project within 24 hours.

Failure to make necessary corrections to Traffic Control items based on barricade inspections will be cause for withholding the monthly estimate until such corrections are made.

Remove from the roadway and store in a central location approved by the Engineer all temporary traffic control devices, such as cones, barrels, portable signs, vertical panels, etc., which will not be used within 24 hours. This includes removal of temporary traffic control devices from the roadway over the weekend.

The use of Portable Traffic Signals is not required, but may be used as an option to the contractor. This will be considered subsidiary to this item.

A pilot car is required for this project. Provide a “Queue time” of no longer than 10 (ten) minutes during roadway work operations.

Limit barricades shall be placed at Reference #01. Refer to the Barricade and Construction Sheets. All other locations will be waived.

**Project Number:** RMC 642135001

**Sheet 3 of 3**

**County:** MONTAGUE, ETC.

**Control:** 6421-35-001

**Highway:** US 287, ETC.

Perform all construction work in daylight hours unless the engineer approves nighttime work in writing. Do not allow any construction equipment to be placed on the roadway until 30 minutes after sunrise and ensure that all construction equipment is removed from the roadway 30 minutes before sunset. Sunrise and sunset times will be as determined by NOAA at the following website

<https://gml.noaa.gov/grad/solcalc/sunrise.html>

**Item 545: Crash Cushion Attenuators**

Concrete pads for crash cushion attenuators will be subsidiary per Item 545.5.

All Low Maintenance crash cushion attenuators must be installed with bi-directional hardware.



CONTROLLING PROJECT ID 6421-35-001

DISTRICT Wichita Falls  
HIGHWAY US0287

COUNTY Montague

# Estimate & Quantity Sheet

ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	104-6054	REMOVING CONCRETE(MOW STRIP)	LF	350.000	
	132-6017	EMBANKMENT (VEHICLE)(ORD COMP)(TY A)	CY	135.000	
	164-6001	BROADCAST SEED (PERM) (RURAL) (SANDY)	SY	696.000	
	164-6009	BROADCAST SEED (TEMP) (WARM)	SY	348.000	
	164-6011	BROADCAST SEED (TEMP) (COOL)	SY	348.000	
	166-6001	FERTILIZER	AC	0.140	
	168-6001	VEGETATIVE WATERING	MG	1.000	
	432-6045	RIPRAP (MOW STRIP)(4 IN)	CY	56.500	
	451-6024	RETROFIT RAIL (TY SSTR)	LF	133.330	
	500-6001	MOBILIZATION	LS	1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	6.000	
	512-6002	PORT CTB (FUR & INST)(SGL SLOPE)(TY 2)	LF	1,110.000	
	512-6026	PORT CTB (MOVE)(SGL SLP)(TY 2)	LF	1,110.000	
	512-6050	PORT CTB (REMOVE)(SGL SLP)(TY 2)	LF	1,110.000	
	540-6001	MTL W-BEAM GD FEN (TIM POST)	LF	9,618.660	
	540-6006	MTL BEAM GD FEN TRANS (THRIE-BEAM)	EA	27.000	
	540-6014	SHORT RADIUS	LF	25.000	
	540-6015	DRIVEWAY TERMINAL ANCHOR SECTION	EA	1.000	
	540-6033	MTL BM GD FEN (LONG SPAN SYSTEM)	EA	2.000	
	540-6037	MTL BM GD FEN TRANS (ANCHOR PLATE)	EA	21.000	
	542-6001	REMOVE METAL BEAM GUARD FENCE	LF	8,310.000	
	542-6002	REMOVE TERMINAL ANCHOR SECTION	EA	31.000	
	542-6003	REMOVE DOWNSTREAM ANCHOR TERMINAL	EA	1.000	
	544-6001	GUARDRAIL END TREATMENT (INSTALL)	EA	42.000	
	544-6003	GUARDRAIL END TREATMENT (REMOVE)	EA	6.000	
	545-6003	CRASH CUSH ATTEN (MOVE & RESET)	EA	1.000	
	545-6005	CRASH CUSH ATTEN (REMOVE)	EA	1.000	
	545-6007	CRASH CUSH ATTEN (INSTL)(L)(N)(TL3)	EA	1.000	
	545-6019	CRASH CUSH ATTEN (INSTL)(S)(N)(TL3)	EA	1.000	
	658-6013	INSTL DEL ASSM (D-SW)SZ (BRF)CTB	EA	3.000	
	658-6014	INSTL DEL ASSM (D-SW)SZ (BRF)CTB (BI)	EA	30.000	
	658-6026	INSTL DEL ASSM (D-SY)SZ (BRF)CTB	EA	3.000	
	658-6061	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2	EA	3.000	
	658-6062	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2(BI)	EA	148.000	
	658-6064	INSTL DEL ASSM (D-SY)SZ 1(BRF)GF2	EA	3.000	
	662-6046	WK ZN PAV MRK REMOV (REFL) TY I-A	EA	114.000	
	662-6048	WK ZN PAV MRK REMOV (REFL) TY I-C	EA	114.000	
	662-6056	WK ZN PAV MRK REMOV (TRAF BTN) TY W	EA	228.000	
	662-6058	WK ZN PAV MRK REMOV (TRAF BTN) TY Y	EA	228.000	
	677-6001	ELIM EXT PAV MRK & MRKS (4")	LF	440.000	
	6001-6001	PORTABLE CHANGEABLE MESSAGE SIGN	DAY	54.000	

DISTRICT	COUNTY	CCSJ	SHEET
Wichita Falls	Montague	6421-35-001	6



# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6421-35-001

DISTRICT Wichita Falls

COUNTY Montague

HIGHWAY US0287

ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL
	6185-6002	TMA (STATIONARY)	DAY	111.000	
	6185-6005	TMA (MOBILE OPERATION)	DAY	9.000	

DATE: 12/20/2023 4:38:33 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001\_MBGF\_Cooke\_FY2024\4 - Design\Master\_Design\_File\QUANTITY\_SUMMARY - 1.dgn


SUMMARY OF ROADWAY ITEMS

REFERENCE	COUNTY	ROADWAY	COORDINATES	132	432	451	540	540	540	540	540	544	
				6017	6045	6024	6001	6006	6014	6015	6033	6037	6001
				EMBANKMENT (VEHICLE) (ORD COMP)(TY A)	RIPRAP (MOW STRIP)(4 IN)	RETROFIT RAIL (TY SSTR)	MTL W-BEAM GD FEN (TIM POST)	MTL BEAM GD FEN TRANS (THREE-BEAM)	SHORT RADIUS	DRIVEWAY TERMINAL ANCHOR SECTION	MTL BM GD FEN (LONG SPAN SYSTEM)	MTL BM GD FEN TRANS (ANCHOR PLATE)	GUARDRAIL END TREATMENT (INSTALL)
				CY	CY	LF	LF	EA	LF	EA	EA	EA	
1	MONTAGUE	NB US 287	33.615507, -97.970728	50	21	133.33	300	2				2	
2	MONTAGUE	SH 59	33.549727, -97.872806				1300					4	
3	MONTAGUE	SH 59	33.534241, -97.891404				400	4			4	4	
4	MONTAGUE	US 287 ACCESS	33.531449, -97.828891				181.16	4			4		
5	MONTAGUE	SH 59	33.601609, -97.789930	85	35.5		350					4	
6	MONTAGUE	FM 1956	33.799564, -97.653645				700			2		4	
7	MONTAGUE	FM 1956	33.799496, -97.650499				500	4				4	
8	MONTAGUE	FM 677	33.905401, -97.510296				2700					4	
9	MONTAGUE	FM 677	33.911053, -97.510211				800	2			2	2	
10	MONTAGUE	FM 677	33.786191, -97.509357				200					2	
11	MONTAGUE	FM 677	33.728698, -97.522633				1200					2	
12	COOKE	FM 372	33.602610, -97.123610				250	4			4	4	
13	COOKE	FM 3092	33.637753, -97.106713				225	3			3	3	
14	COOKE	FM 678	33.667674, -97.005036				512.5	4	25	1	4	3	
PROJECT TOTALS				135	56.5	133.33	9618.66	27	25	1	2	21	42

SUMMARY OF ROADWAY ITEMS

REFERENCE	COUNTY	ROADWAY	COORDINATES	545	658	658	658	658	658	
				6025	6013	6014	6026	6061	6062	6064
				CRASH CUSHION ATTN (INSTALL)(REACT)(N)	INSTL DEL ASSM (D-SW)SZ (BRF)CTB	INSTL DEL ASSM (D-SW)SZ (BRF)CTB (BI)	INSTL DEL ASSM (D-SY)SZ (BRF)CTB	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2	INSTL DEL ASSM (D-SW)SZ 1(BRF)GF2 (BI)	INSTL DEL ASSM (D-SY)SZ 1(BRF)GF2
				EA	EA	EA	EA	EA	EA	EA
1	MONTAGUE	NB US 287	33.615507, -97.970728		3		3	3		3
2	MONTAGUE	SH 59	33.549727, -97.872806						15	
3	MONTAGUE	SH 59	33.534241, -97.891404			6			12	
4	MONTAGUE	US 287 ACCESS	33.531449, -97.828891						6	
5	MONTAGUE	SH 59	33.601609, -97.789930						6	
6	MONTAGUE	FM 1956	33.799564, -97.653645						10	
7	MONTAGUE	FM 1956	33.799496, -97.650499			6			12	
8	MONTAGUE	FM 677	33.905401, -97.510296						29	
9	MONTAGUE	FM 677	33.911053, -97.510211						9	
10	MONTAGUE	FM 677	33.786191, -97.509357						3	
11	MONTAGUE	FM 677	33.728698, -97.522633						13	
12	COOKE	FM 372	33.602610, -97.123610			6			12	
13	COOKE	FM 3092	33.637753, -97.106713	1		6			9	
14	COOKE	FM 678	33.667674, -97.005036			6			12	
PROJECT TOTALS				1	3	30	3	3	148	3

US 287, ETC.  
 QUANTITY SUMMARY



2023  
 Texas Department of Transportation  
 SHEET 1 OF 3

CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	8	



DATE: 12/20/2023 4:38:33 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBOF Cooke FY2024.4 - Design\Master\_Design File\QUANTITY SUMMARY - 2.dgn

SUMMARY OF REMOVAL ITEMS

REFERENCE	COUNTY	ROADWAY	COORDINATES	104	542	542	542	544	677
				6054	6001	6002	6003	6003	6001
				REMOVING CONCRETE (MOW STRIP)	REMOVE METAL BEAM	REMOVE TERMINAL ANCHOR SECTION	REMOVE DOWNSTRE AM ANCHOR TERMINAL	GUARDRAIL END TREATMENT (REMOVE)	ELIM EXT PAV MRK & MRKS (4")
				LF	LF	EA	EA	EA	LF
1	MONTAGUE	NB US 287	33.615507, -97.970728	350	315	1	1	2	440
2	MONTAGUE	SH 59	33.549727, -97.872806		1400	4			
3	MONTAGUE	SH 59	33.534241, -97.891404		375	4			
7	MONTAGUE	FM 1956	33.799496, -97.650499		375	4			
8	MONTAGUE	FM 677	33.905401, -97.510296		2800	4			
9	MONTAGUE	FM 677	33.911053, -97.510211		840	2			
10	MONTAGUE	FM 677	33.786191, -97.509357		250	2			
11	MONTAGUE	FM 677	33.728698, -97.522633		1250	2			
12	COOKE	FM 372	33.602610, -97.123610		275	4			
13	COOKE	FM 3092	33.637753, -97.106713		265	3		1	
14	COOKE	FM 678	33.667674, -97.005036		165	1		3	
PROJECT TOTALS				350	8310	31	1	6	440

SUMMARY OF EROSION CONTROL ITEMS

REFERENCE	COUNTY	ROADWAY	COORDINATES	164	164	164	166	168
				6001	6009	6011	6001	6001
				BROADCAST SEED (PERM)	BROADCAST SEED (TEMP) (WARM)	BROADCAST SEED (TEMP) (COOL)	FERTILIZER	VEGETATIVE WATERING
				SY	SY	SY	AC	MG
1	MONTAGUE	NB US 287	33.615507, -97.970728	258	129	129	0.07	0.5
5	MONTAGUE	SH 59	33.601609, -97.789930	438	219	219	0.07	0.5
PROJECT TOTALS				696	348	348	0.14	1

US 287, ETC.  
 QUANTITY  
 SUMMARY

SUMMARY OF WORKZONE TRAFFIC CONTROL ITEMS

REFERENCE	COUNTY	ROADWAY	COORDINATES	512	512	512	545	545	545	662	662	662	662
				6002	6026	6050	6003	6005	6019	6046	6048	6056	6058
				PORT CTB (FUR & INST)(SGL SLOPE)(TY 2) LF	PORT CTB (MOVE)(SGL SLP)(TY 2) LF	PORT CTB (REMOVE)(SGL SLP)(TY 2) LF	CRASH CUSH ATTEN (MOVE & RESET) EA	CRASH CUSH ATTEN (REMOVE) EA	CRASH CUSH ATTEN (INSTL)(S)(N)(TL3) EA	WK ZN PAV MRK REMOV (REFL) TY I-A EA	WK ZN PAV MRK REMOV (REFL) TY I-C EA	WK ZN PAV MRK REMOV (TRAF BTN) TY W EA	WK ZN PAV MRK REMOV (TRAF BTN) TY Y EA
1	MONTAGUE	NB US 287	33.615507, -97.970728	1110	1110	1110	1	1	1	114	114	228	228
2	MONTAGUE	SH 59	33.549727, -97.872806										
3	MONTAGUE	SH 59	33.534241, -97.891404										
4	MONTAGUE	US 287 ACCESS	33.531449, -97.828891										
5	MONTAGUE	SH 59	33.601609, -97.789930										
6	MONTAGUE	FM 1956	33.799564, -97.653645										
7	MONTAGUE	FM 1956	33.799496, -97.650499										
8	MONTAGUE	FM 677	33.905401, -97.510296										
9	MONTAGUE	FM 677	33.911053, -97.510211										
10	MONTAGUE	FM 677	33.786191, -97.509357										
11	MONTAGUE	FM 677	33.728698, -97.522633										
12	COOKE	FM 372	33.602610, -97.123610										
13	COOKE	FM 3092	33.637753, -97.106713										
14	COOKE	FM 678	33.667674, -97.005036										
PROJECT TOTALS				1110	1110	1110	1	1	1	114	114	228	228

SUMMARY OF WORKZONE TRAFFIC CONTROL ITEMS


REFERENCE	COUNTY	ROADWAY	COORDINATES	6001	6185	6185
				6001	6002	6005
				PORTABLE CHANGEABLE DAY	TMA (STATIONARY) DAY	TMA (MOBILE OPERATION) DAY
1	MONTAGUE	NB US 287	33.615507, -97.970728	54	20	9
2	MONTAGUE	SH 59	33.549727, -97.872806		7	
3	MONTAGUE	SH 59	33.534241, -97.891404		7	
4	MONTAGUE	US 287 ACCESS	33.531449, -97.828891		7	
5	MONTAGUE	SH 59	33.601609, -97.789930		7	
6	MONTAGUE	FM 1956	33.799564, -97.653645		7	
7	MONTAGUE	FM 1956	33.799496, -97.650499		7	
8	MONTAGUE	FM 677	33.905401, -97.510296		7	
9	MONTAGUE	FM 677	33.911053, -97.510211		7	
10	MONTAGUE	FM 677	33.786191, -97.509357		7	
11	MONTAGUE	FM 677	33.728698, -97.522633		7	
12	COOKE	FM 372	33.602610, -97.123610		7	
13	COOKE	FM 3092	33.637753, -97.106713		7	
14	COOKE	FM 678	33.667674, -97.005036		7	
PROJECT TOTALS				54	111	9

US 287, ETC.  
QUANTITY  
SUMMARY




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:34 PM  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001\_MBOF\_Cooke\_FY2024\4 - Design\Master Design File\TCP\_PHASE 1 DETAIL.dgn

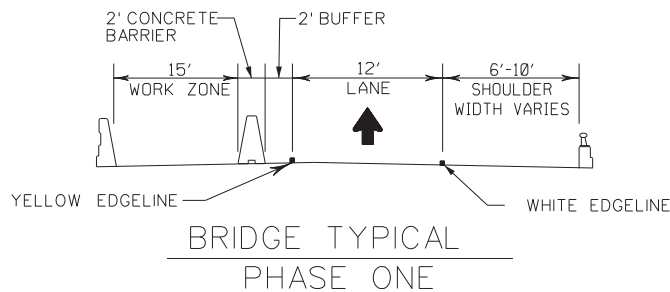

NOTE:

1. TEMPORARY PAVEMENT MARKINGS ARE TO BE BUTTONS AND RPMS TO SIMULATE LANE LINES AS SHOWN ON BC(12)-21
2. "L" DISTANCE IS BASED ON AN OFFSET "W" OF 12'. IF THE ACTUAL OFFSET IN THE FIELD VARIES "L" WILL NEED TO BE RECALCULATED.
3. PLACE CHANNELIZING DEVICES ALONG STRIPED TAPER AND YELLOW EDGE LINE UNTIL CTB BEGINS.
4. PLACE BARRIER REFLECTORS AS SHOWN ON BC(6)-21. THIS WILL BE SUBSIDIARY TO ITEM 502.
5. PLACE CRASH CUSHION PARALLEL TO ROADWAY THEN ATTACH FIRST JOINT OF CTB. CONTINUE PLACEMENT OF CTB AT A FLARE RATE OF 25:1 AND TRANSITION CTB BACK PARALLEL TO YELLOW EDGELINE FOR THE LENGTH OF THE RAIL PLACEMENT.

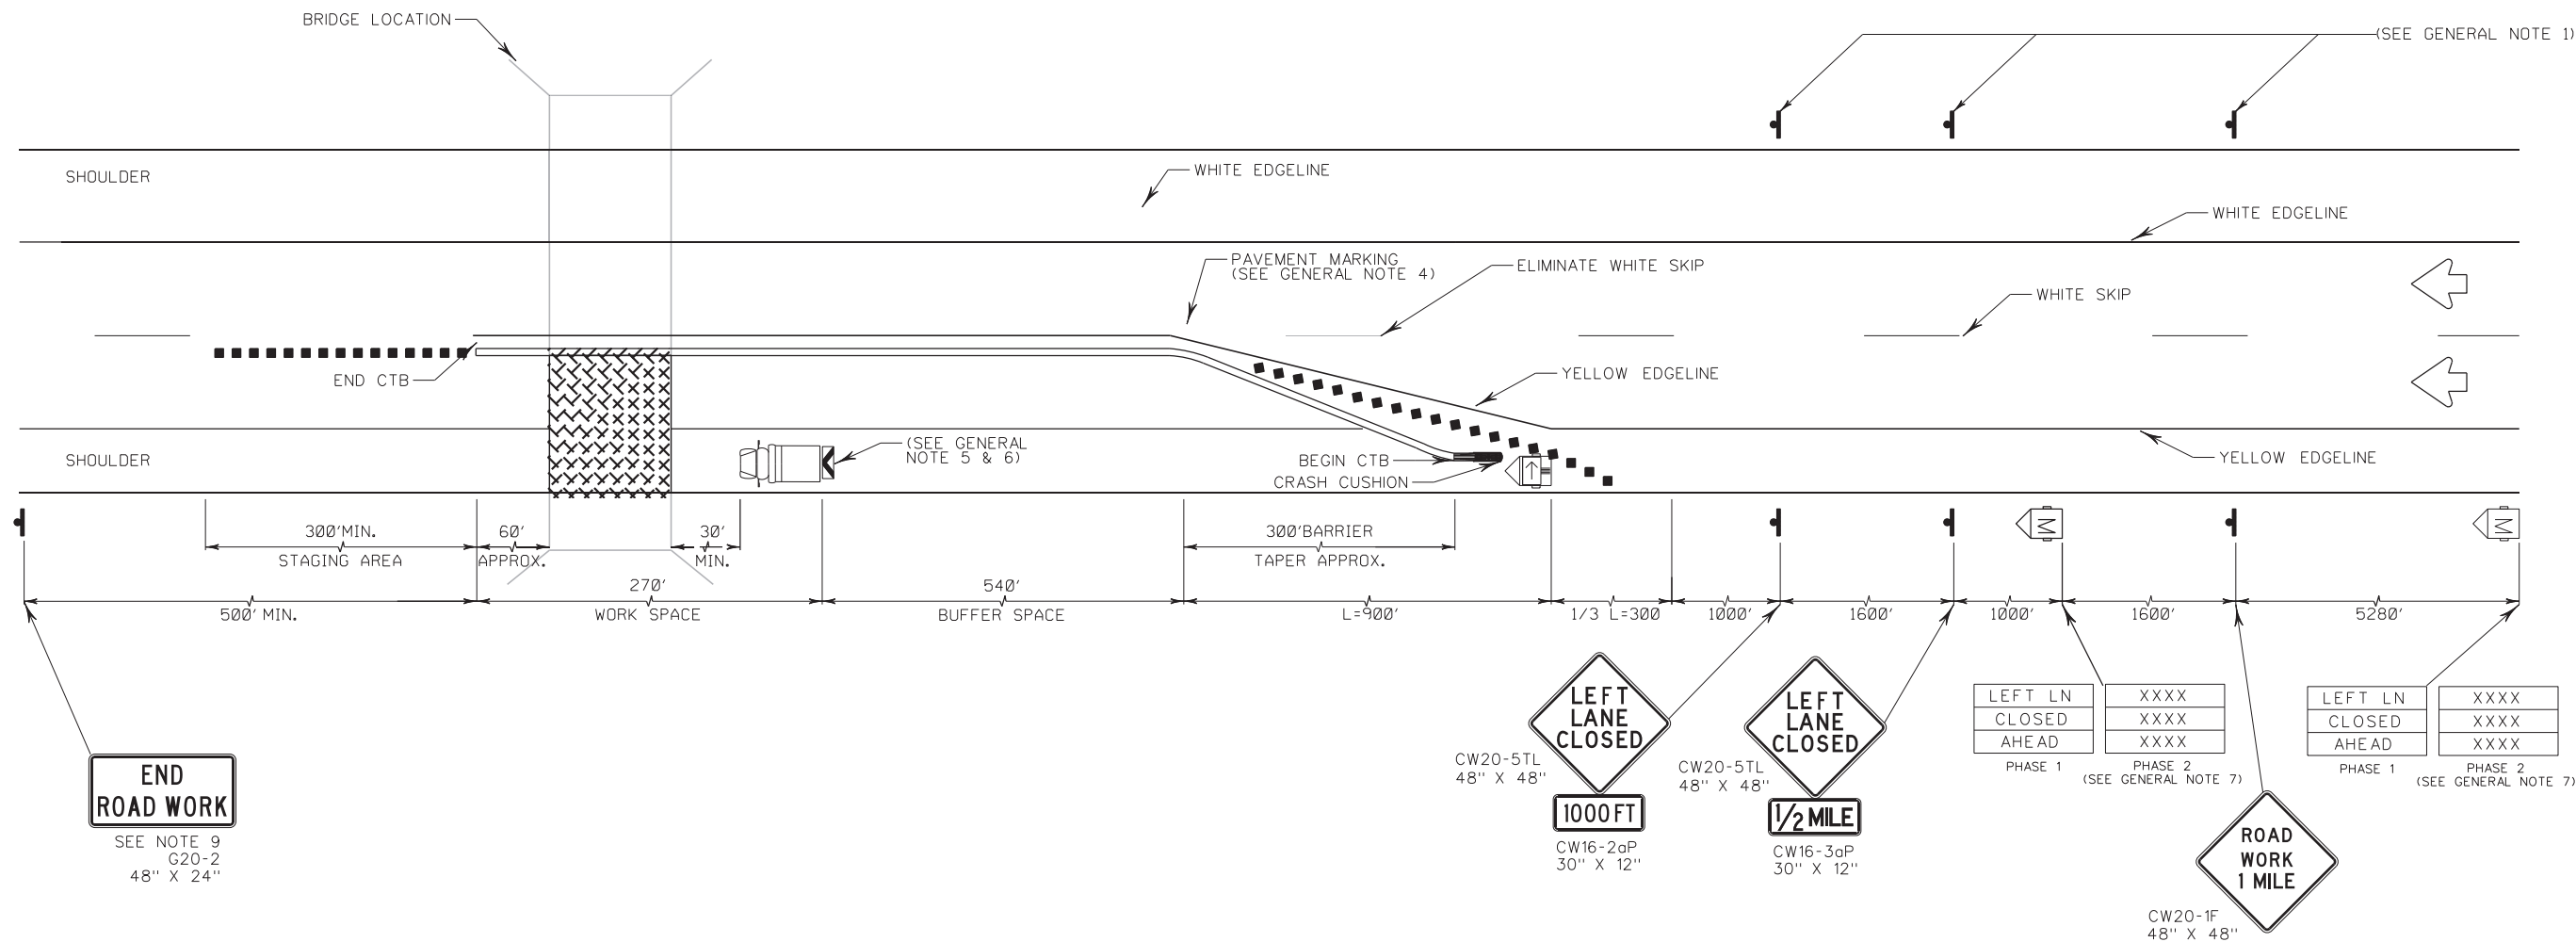


GENERAL NOTES

1. All traffic control devices illustrated are REQUIRED.
2. Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
3. Drums are to be used as the typical channelizing device. For Intermediate Term Stationary work, drums shall be used on tapers with drums used on tangent sections. Other channelizing devices may be used as directed by the Engineer.
4. The placement of pavement markings may be omitted on Intermediate-term stationary work zones with the approval of the Engineer.
5. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
6. Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.
7. Phase 2 of the PCMS message should include appropriate information formatted as shown on BC(6), such as "MERGE RIGHT," recommended advisory speed, delay information, or other specific warnings.
8. See TCP(6-1)-12 for other details and notes not shown here.
9. The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

Posted Speed	Formula	Minimum Desirable Taper Lengths * x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
75	L = WS	750'	825'	900'	75'	150'	900'	540'

\*\* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Crash Cushion

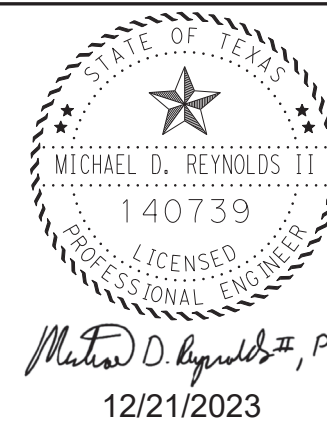

DRAWING NOT TO SCALE

Texas Department of Transportation

**TCP PHASING DETAIL 1**  
**SSTR BRIDGE RAIL RETROFIT**


NB US 287  
 "ONE TIME USE ONLY"

SHEET 1 OF 2

© TxDOT 2023		DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
REVISIONS	CONT	SECT	JOB	HIGHWAY	
	6421	35	001	US 287, ETC.	
	DIST	COUNTY	SHEET NO.		
	WFS	MONTAGUE, ETC.	12		


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:35 PM  
 FILE: T:\WFSMANT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024\4 - Design\Master Design File\TCP\_PHASE 2 DETAIL.dgn

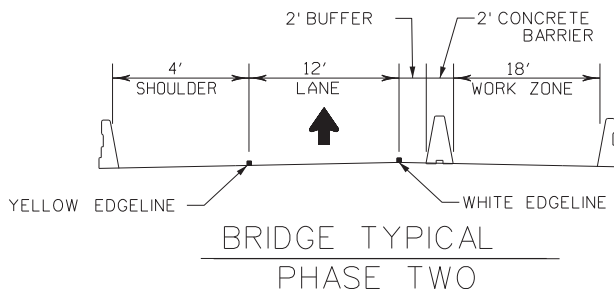

**NOTE:**

1. TEMPORARY PAVEMENT MARKINGS ARE TO BE BUTTONS AND RPMs TO SIMULATE LANE LINES AS SHOWN ON BC(12)-21
2. "L" DISTANCE IS BASED ON AN OFFSET "W" OF 12'. IF THE ACTUAL OFFSET IN THE FIELD VARIES "L" WILL NEED TO BE RECALCULATED.
3. PLACE CHANNELIZING DEVICES ALONG STRIPED TAPER AND WHITE EDGE LINE UNTIL CTB BEGINS.
4. PLACE BARRIER REFLECTORS AS SHOWN ON BC(6)-21. THIS WILL BE SUBSIDIARY TO ITEM 502.
5. PLACE CRASH CUSHION PARALLEL TO ROADWAY THEN ATTACH FIRST JOINT OF CTB. CONTINUE PLACEMENT OF CTB AT A FLARE RATE OF 25:1 AND TRANSITION CTB BACK PARALLEL TO YELLOW EDGELINE FOR THE LENGTH OF THE RAIL PLACEMENT.

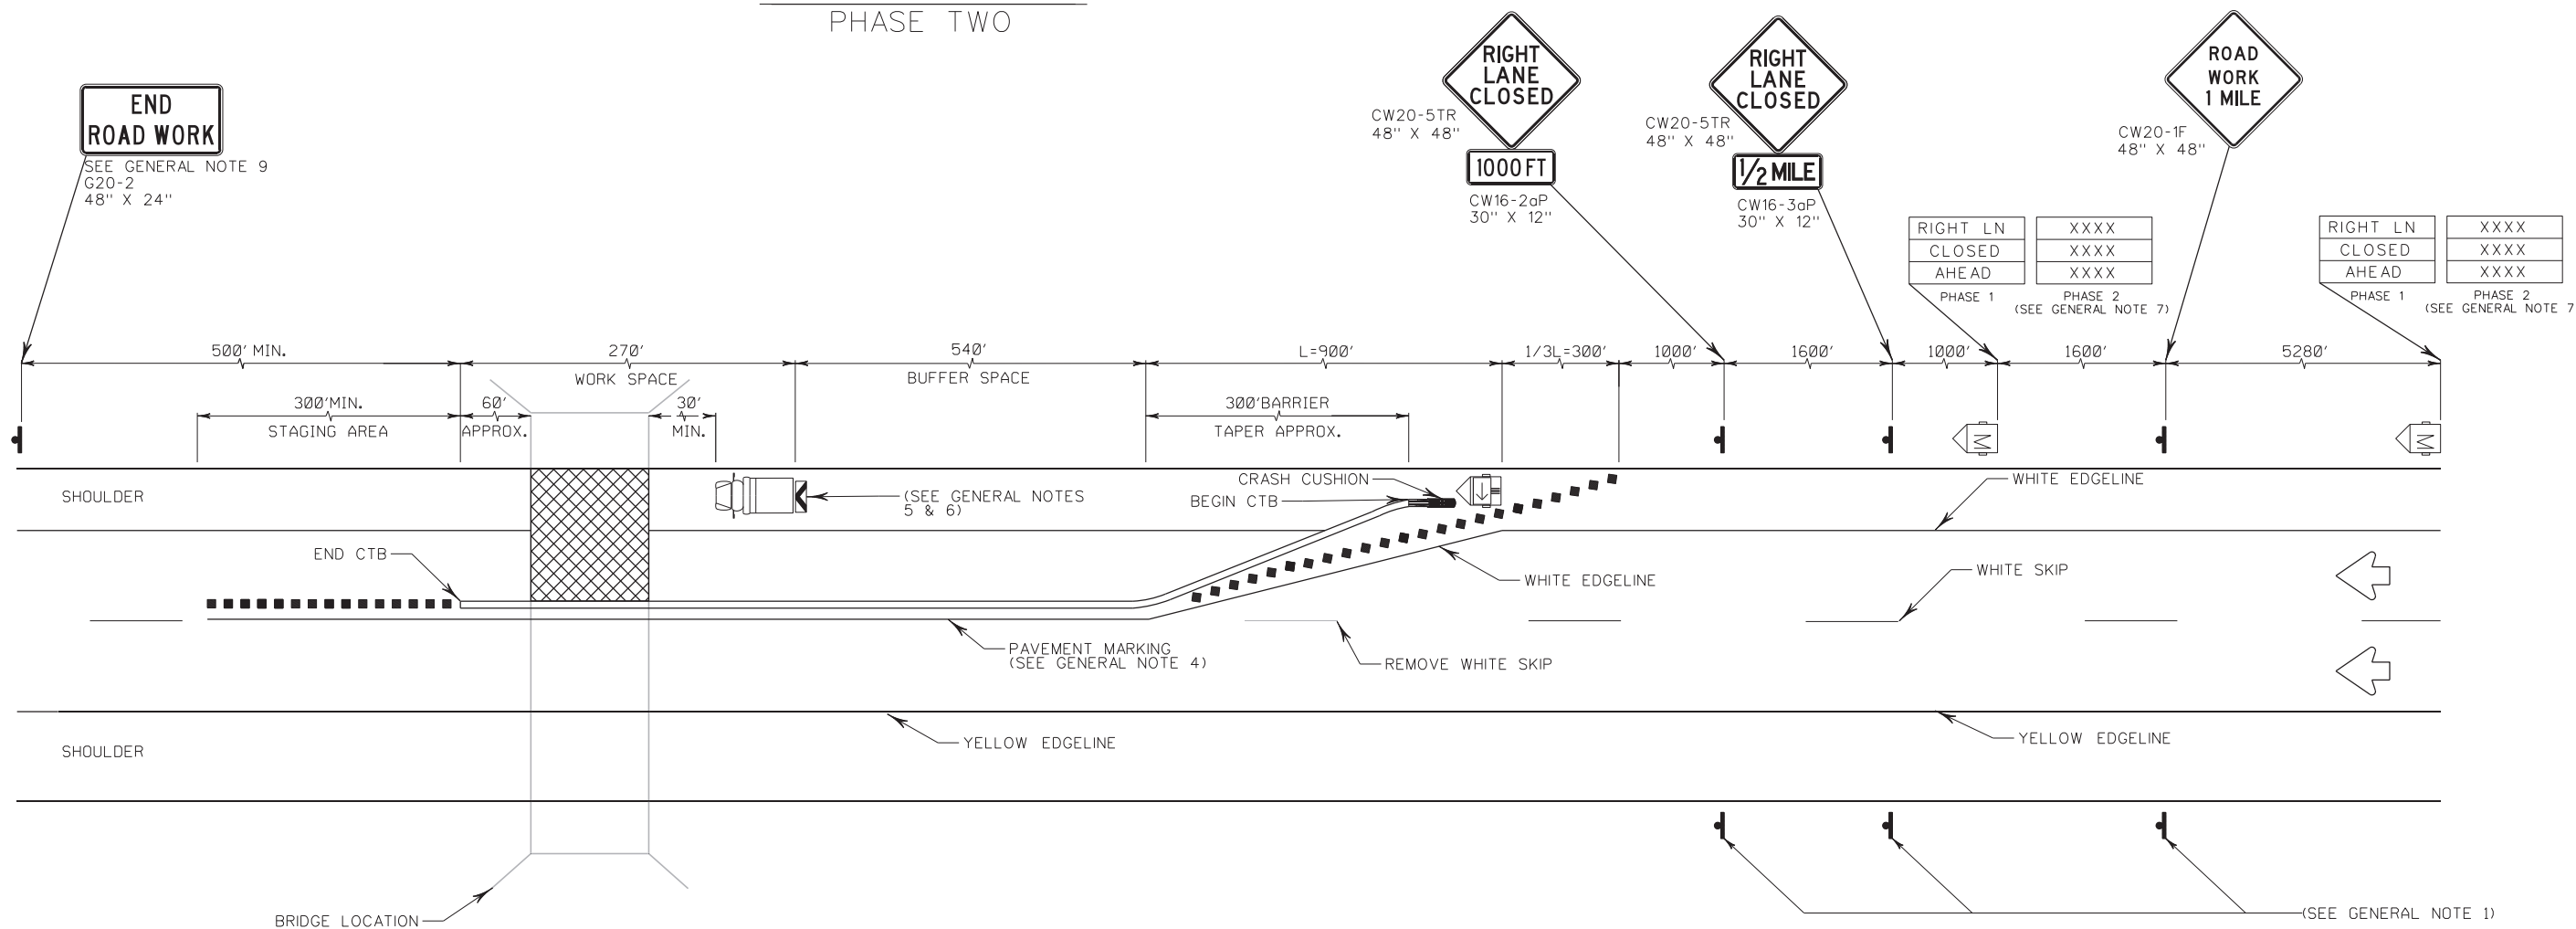

**GENERAL NOTES**


1. All traffic control devices illustrated are REQUIRED.
2. Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
3. Drums are to be used as the typical channelizing device. For Intermediate Term Stationary work, drums shall be used on tapers with drums used on tangent sections. Other channelizing devices may be used as directed by the Engineer.
4. The placement of pavement markings may be omitted on Intermediate-term stationary work zones with the approval of the Engineer.
5. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
6. Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.
7. Phase 2 of the PCMS message should include appropriate information formatted as shown on BC(6), such as "MERGE RIGHT," recommended advisory speed, delay information, or other specific warnings.
8. See TCP(6-1)-12 for other details and notes not shown here.
9. The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

Posted Speed	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
75	L = WS	750'	825'	900'	75'	150'	900'	540'

\*\* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Crash Cushion

DRAWING NOT TO SCALE

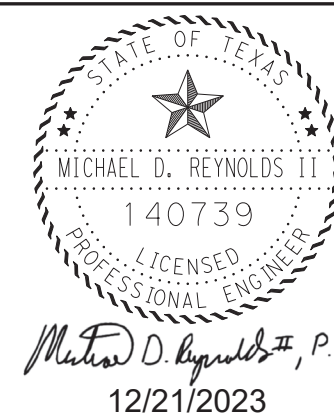

Texas Department of Transportation

**TCP PHASING DETAIL 2**  
**SSTR BRIDGE RAIL RETROFIT**  
 NB US 287  
 "ONE TIME USE ONLY"

SHEET 2 OF 2

© TxDOT 2023		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
REVISIONS		CONT	SECT	JOB	HIGHWAY
		6421	35	001	US 287, ETC.
		DIST	COUNTY	SHEET NO.	
		WFS	MONTAGUE, ETC.	13	

**BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:**

1. The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
3. The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
4. The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
5. Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
6. When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
7. The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
8. All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
9. The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
10. Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
11. Traffic control devices should be in place only while work is actually in progress or a definite need exists.
12. The Engineer has the final decision on the location of all traffic control devices.
13. Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

**WORKER SAFETY NOTES:**

1. Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
2. Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

**COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES**

1. Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
2. Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT <a href="http://www.txdot.gov">http://www.txdot.gov</a>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT or any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats. Other than the original design file, TxDOT does not assume any liability for the use of this standard in any other format.

DATE: 12/20/2023 4:38:36 PM  
 FILE: I:\WFSAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master\_Design\_File\BC(1)-21.dgn



**BARRICADE AND CONSTRUCTION  
 GENERAL NOTES  
 AND REQUIREMENTS**

**BC(1)-21**


FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6421	35	001	US 287, ETC.				
4-03	7-13	DIST		COUNTY		SHEET NO.			
9-07	8-14	WFS		MONTAGUE, ETC.		14			
5-10	5-21								



# TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

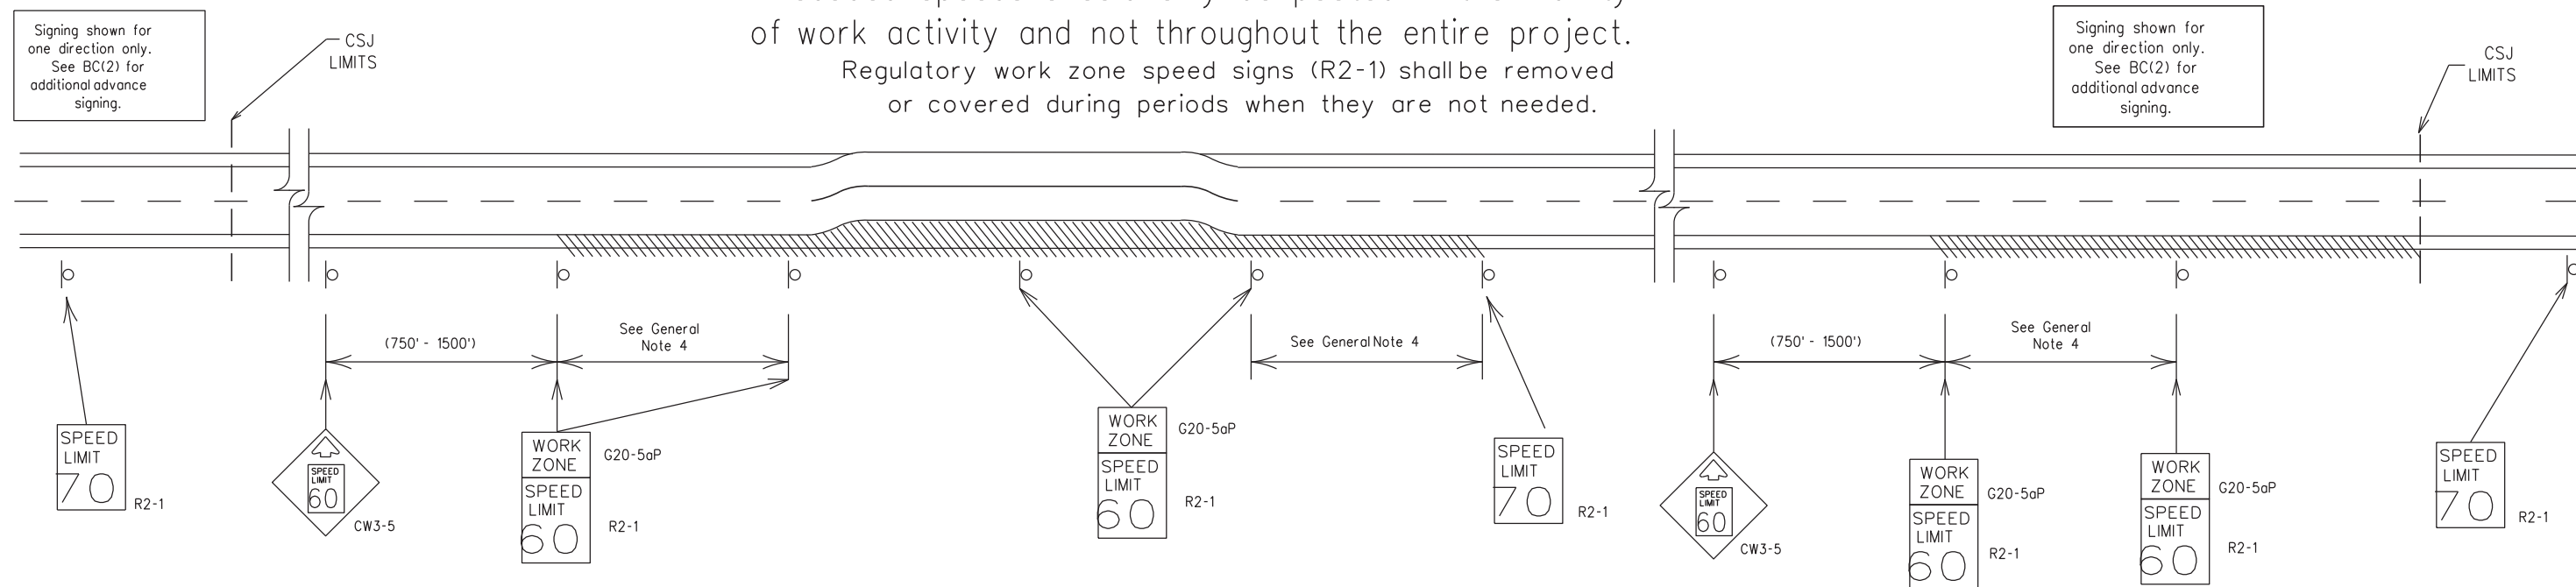

## GUIDANCE FOR USE:

### LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

### SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

### GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:
  - 40 mph and greater 0.2 to 2 miles
  - 35 mph and less 0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
  - Law enforcement.
  - Flagger stationed next to sign.
  - Portable changeable message sign (PCMS).
  - Low-power (drone) radar transmitter.
  - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this document.

DATE: 12/20/2023 4:38:37 PM  
FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Barricade and Construction Work Zone Speed Limit.dgn

SHEET 3 OF 12


<h2>BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT</h2>			
<h3>BC(3)-21</h3>			
FILE:	bc-21.dgn	DN: TxDOT	CK: TxDOT
© TxDOT	November 2002	CONT	SECT
REVISIONS		JOB	HIGHWAY
9-07	8-14	6421	35
7-13	5-21	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	16	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:37 PM  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024 V4 - Design\Master Design File\BC (4)-21.dgn


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

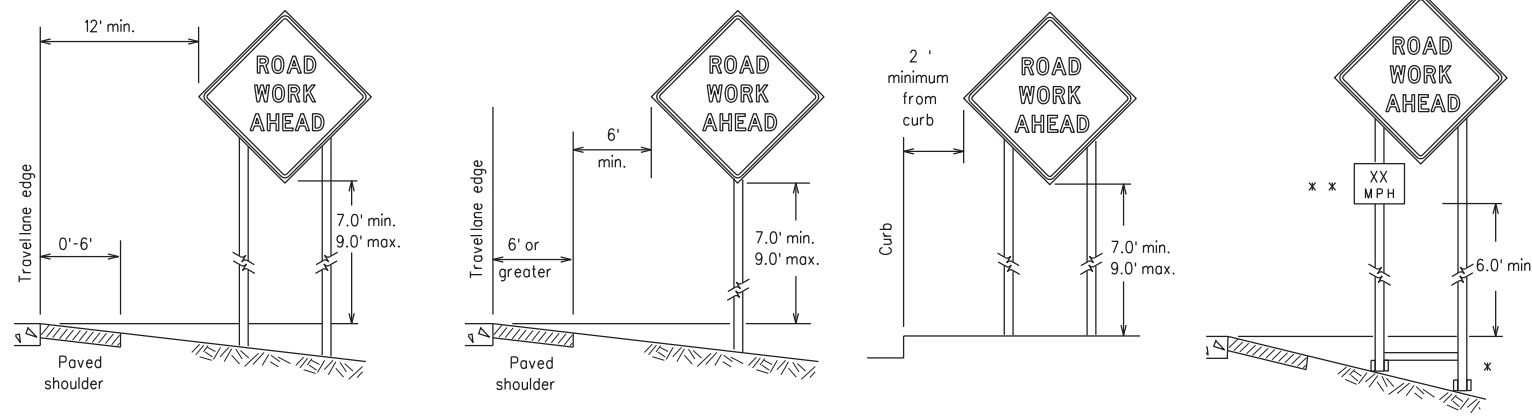

\* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

\* \* When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

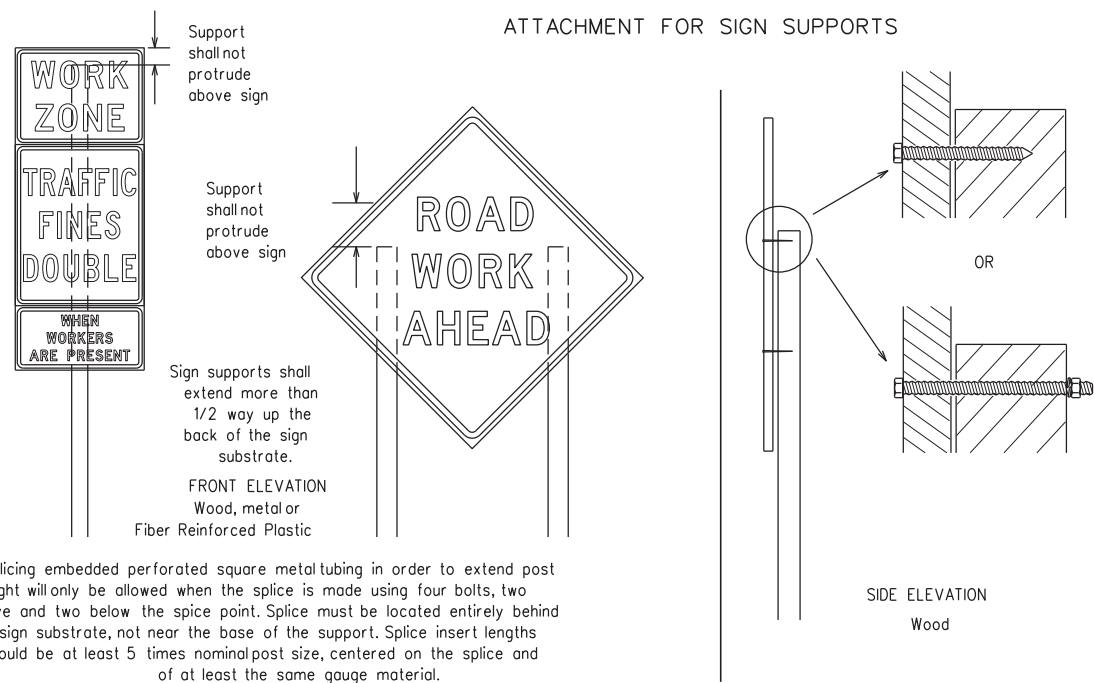


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nails shall NOT be allowed. Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflectorized when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

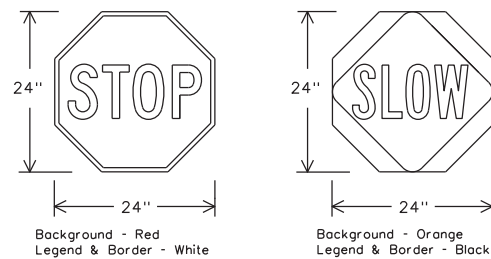

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
  - a. Long-term stationary - work that occupies a location more than 3 days.
  - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
  - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
  - d. Short, duration - work that occupies a location up to 1 hour.
  - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B or Type C, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING


1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.



**Texas Department of Transportation**

Traffic Safety Division Standard



## BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

### BC(4)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	MONTAGUE, ETC.	17	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:38 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master\_Design\_File\BC(5)-21.dgn

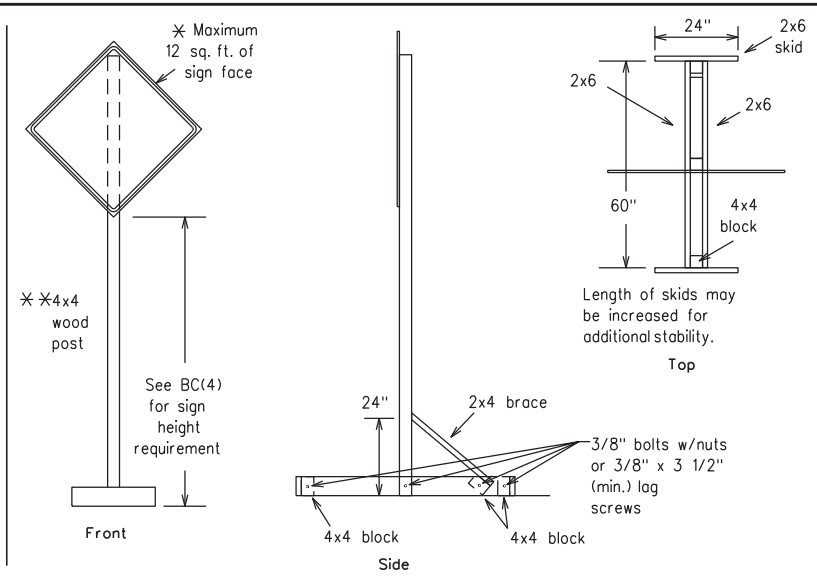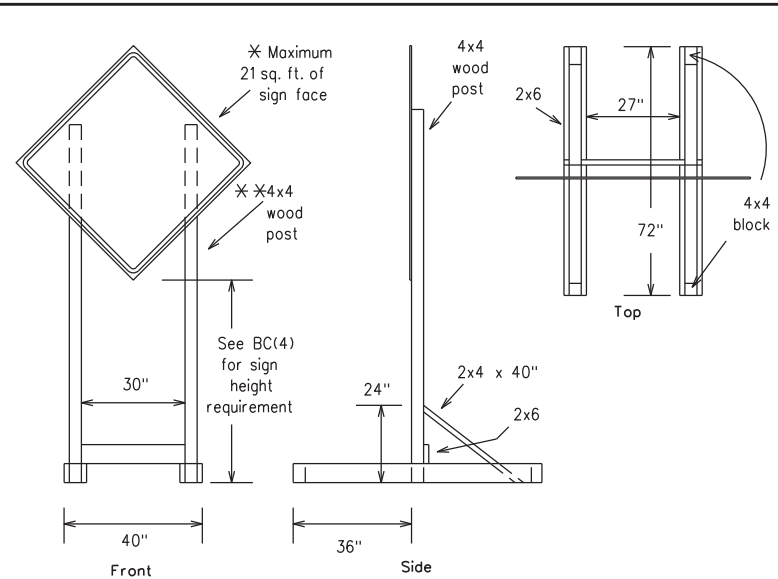



**SKID MOUNTED WOOD SIGN SUPPORTS**

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

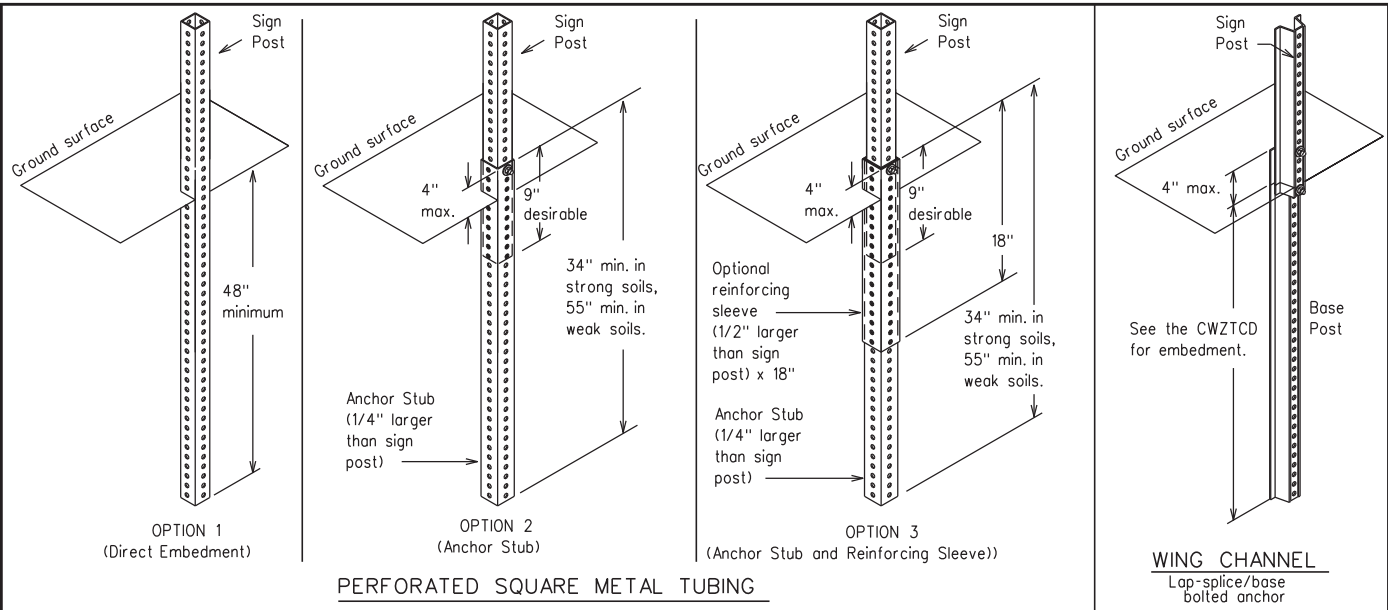


**GROUND MOUNTED SIGN SUPPORTS**

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

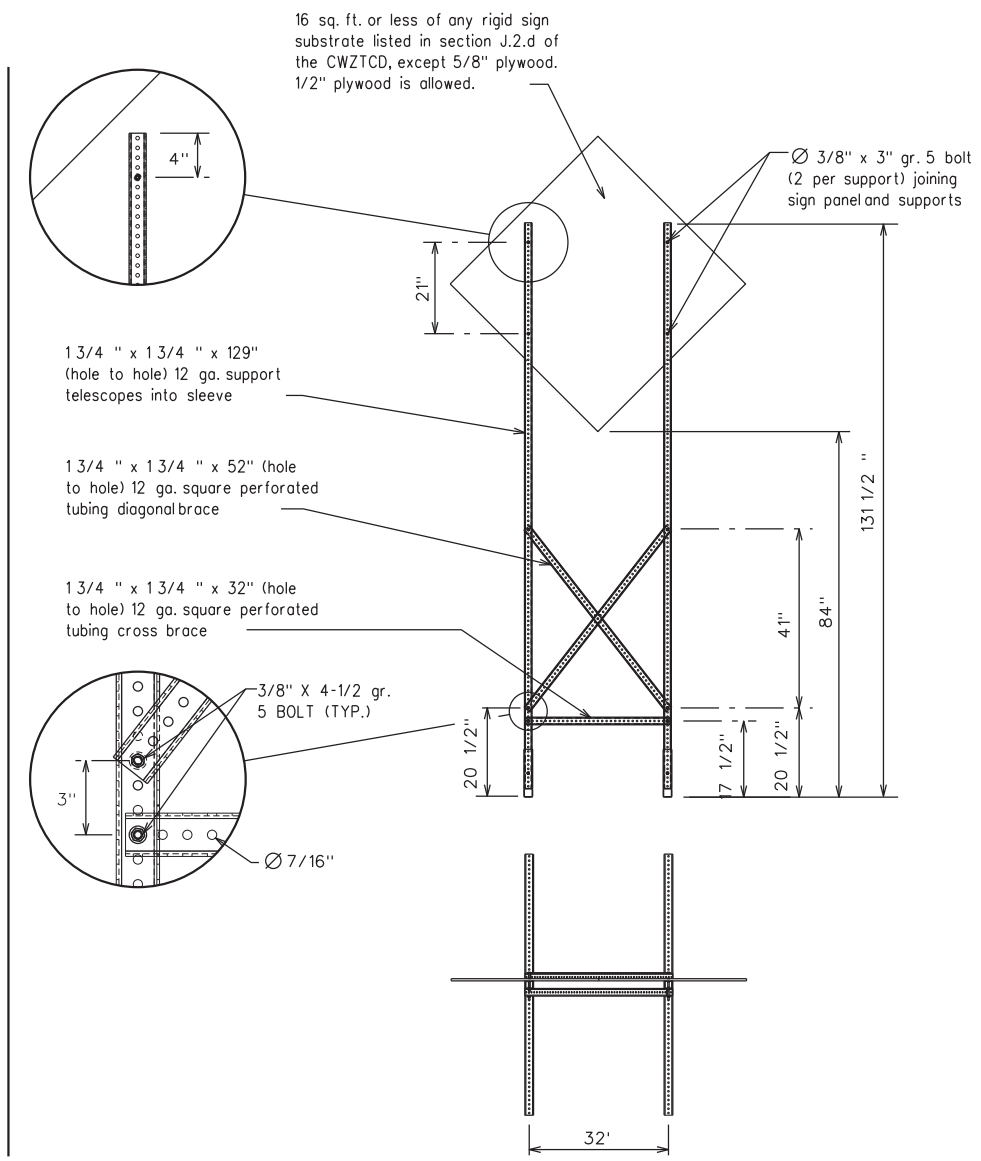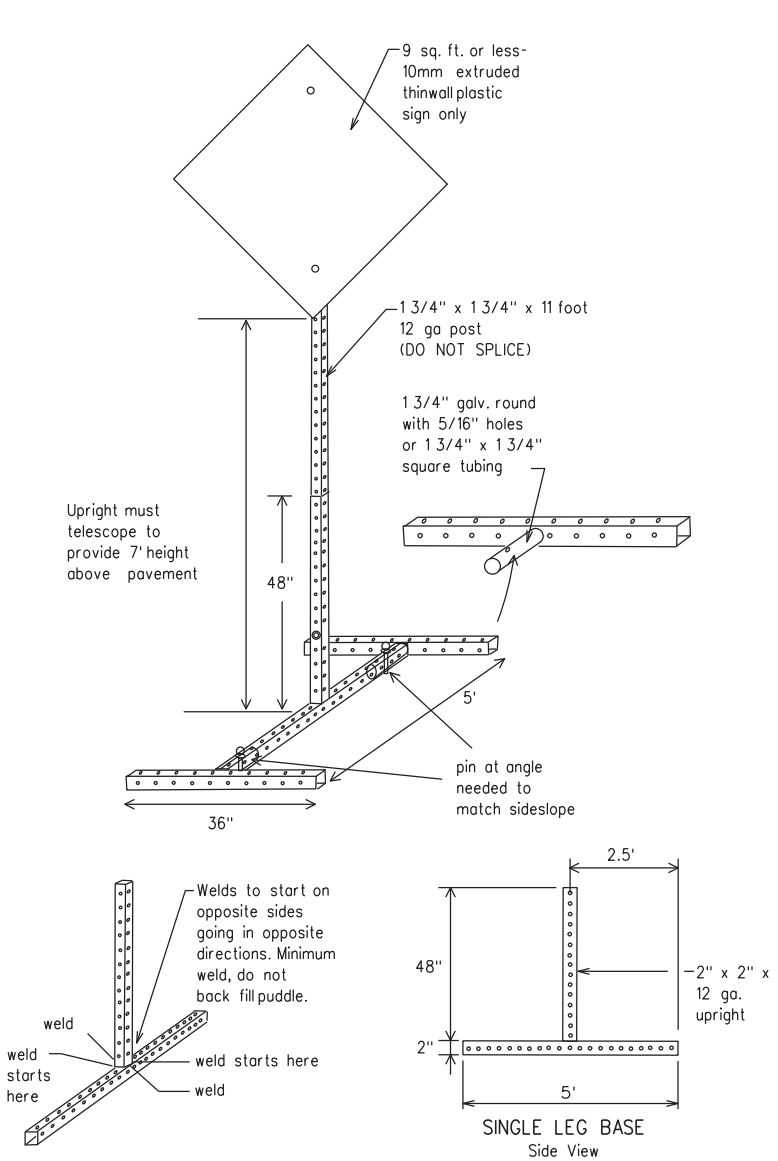

**SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS**

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

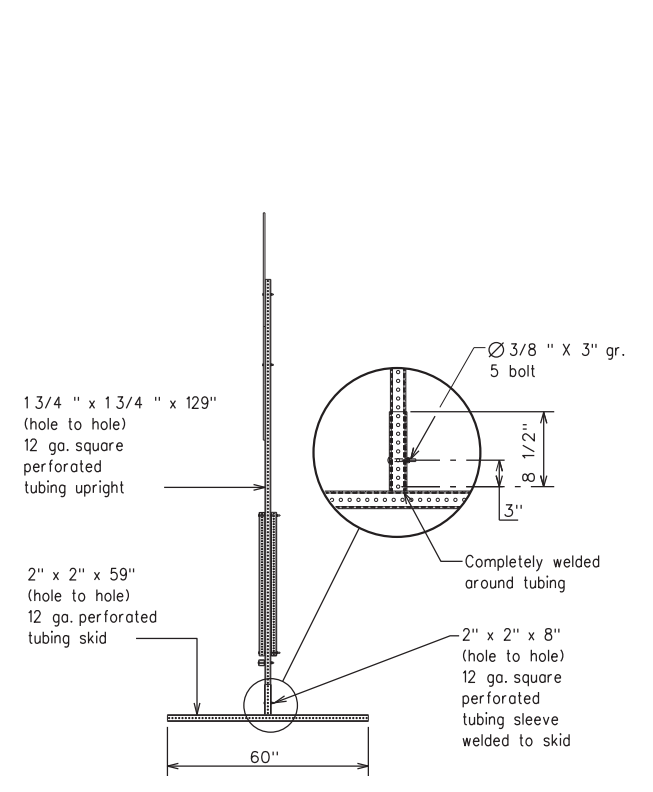

**WEDGE ANCHORS**

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

**OTHER DESIGNS**

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

**GENERAL NOTES**

- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
  - No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
  - When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.
- \* See BC(4) for definition of "Work Duration."
  - \*\* Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
  - See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



**BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT**

BC(5)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	MONTAGUE, ETC.	18	

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

# RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

## PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Cannot	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHS
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation \* IH-number, US-number, SH-number, FM-number

## Phase 1: Condition Lists

### Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED	ROADWORK XXX FT	ROAD REPAIRS XXXX FT
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT	FLAGGER XXXX FT	LANE NARROWS XXXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT	RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
RIGHT X LANES CLOSED	RIGHT X LANES OPEN	MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
CENTER LANE CLOSED	DAYTIME LANE CLOSURES	LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED	DETOUR X MILE	ROUGH ROAD XXXX FT
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE	ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
EXIT CLOSED	RIGHT LN TO BE CLOSED	BUMP XXXX FT	US XXX EXIT X MILES
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI	TRAFFIC SIGNAL XXXX FT	LANES SHIFT
XXXXXXXXX BLVD CLOSED			

\* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

### APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS should be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

### FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol"(CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

## Phase 2: Possible Component Lists

### Action to Take/Effect on Travel List

MERGE RIGHT	FORM X LINES RIGHT
DETOUR NEXT X EXITS	USE XXXXX RD EXIT
USE EXIT XXX	USE EXIT I-XX NORTH
STAY ON US XXX SOUTH	USE I-XX E TO I-XX N
TRUCKS USE US XXX N	WATCH FOR TRUCKS
WATCH FOR TRUCKS	EXPECT DELAYS
EXPECT DELAYS	PREPARE TO STOP
REDUCE SPEED XXX FT	END SHOULDER USE
USE OTHER ROUTES	WATCH FOR WORKERS
STAY IN LANE	

### Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXXX TO XXXXXXXX
US XXX TO FM XXXX

### Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

### \* \* Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

\* \* See Application Guidelines Note 6.

### WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

SHEET 6 OF 12



**BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)**

**BC(6)-21**


FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	MONTAGUE, ETC.	19	

DATE: 12/20/2023 4:38:38 PM  
FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024-4 - Design\Master\_Design\_File\BC(6)-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 12/20/2023 4:38:39 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\BC (7)-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

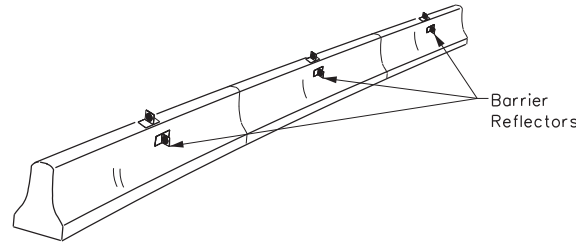

CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

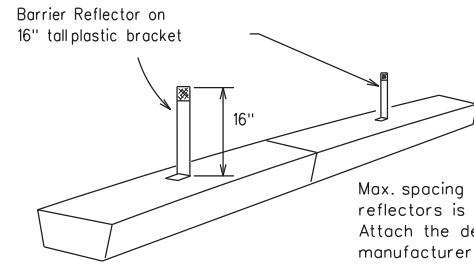


LOW PROFILE CONCRETE BARRIER (LPCB)

**LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES**

LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

See D & OM (VIA)

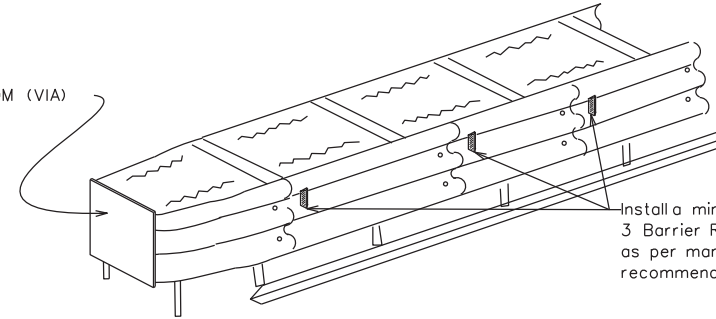

DELINEATION OF END TREATMENTS

**END TREATMENTS FOR CTB'S USED IN WORK ZONES**

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

**BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS**

**WARNING LIGHTS**


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B or C sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

**WARNING LIGHTS MOUNTED ON PLASTIC DRUMS**


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

**WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS**

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

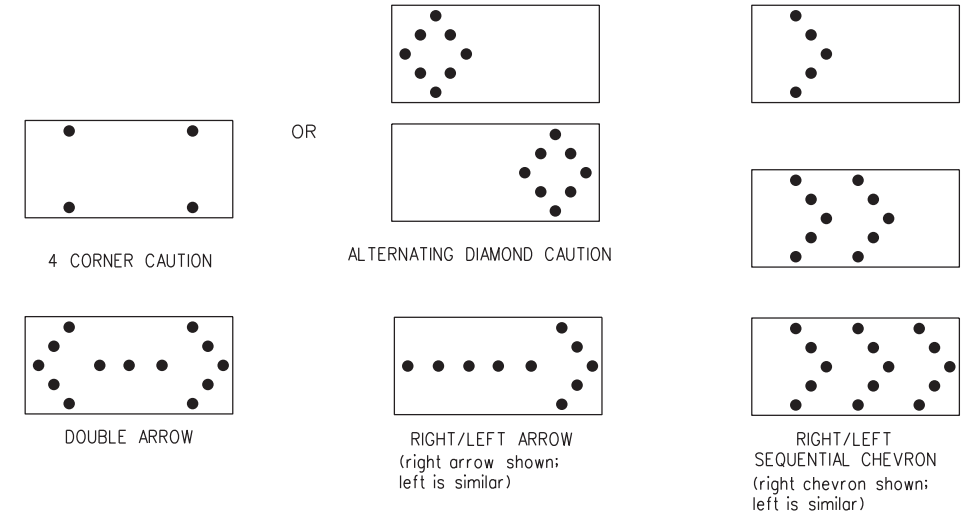

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

**ATTENTION**  
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

**FLASHING ARROW BOARDS**

SHEET 7 OF 12

**TRUCK-MOUNTED ATTENUATORS**

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



**BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR**

**BC(7)-21**

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6421	35	001	US 287, ETC.				
9-07	8-14	DIST	COUNTY		SHEET NO.				
7-13	5-21	WFS	MONTAGUE, ETC.		20				

DATE: 12/20/2023 4:38:40 PM  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\BC (8)-21.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

**GENERAL NOTES**

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

**GENERAL DESIGN REQUIREMENTS**

Pre-qualified plastic drums shall meet the following requirements:




- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
- The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
- Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
- Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
- The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
- The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
- Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
- Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
- Drum body shall have a maximum unballasted weight of 11 lbs.
- Drum and base shall be marked with manufacturer's name and model number.

**RETROREFLECTIVE SHEETING**

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

**BALLAST**

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

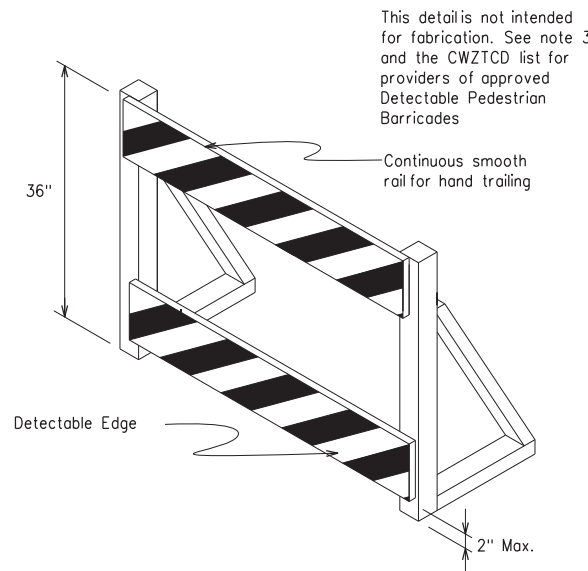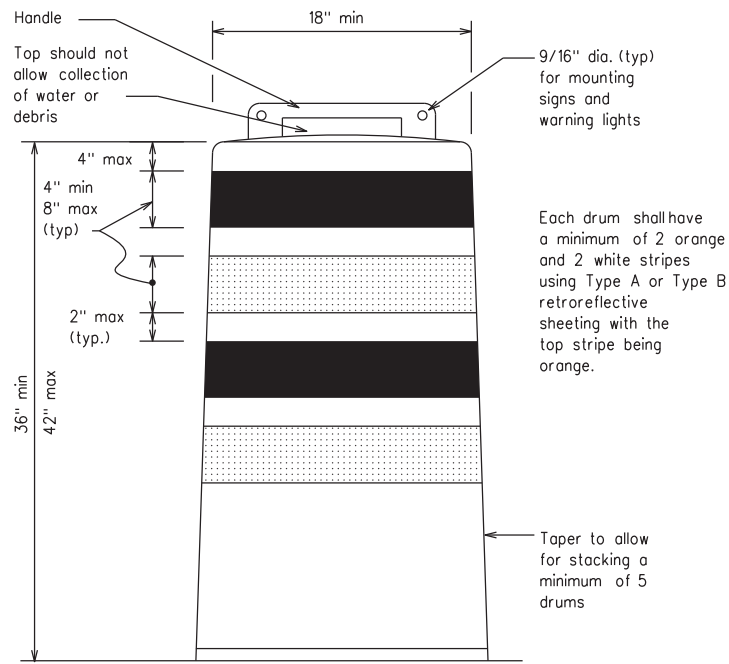


**DETECTABLE PEDESTRIAN BARRICADES**

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign  
(Maximum Sign Dimension)  
Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel  
mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

**SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS**

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B or Type C Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

BC(8)-21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6421	35	001	US 287, ETC.				
4-03	8-14	DIST		COUNTY	SHEET NO.				
9-07	5-21	WFS		MONTAGUE, ETC.	21				
7-13									
102									


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:40 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024-4 - Design\Master\_Design\_File\BC (9)-21.dgn

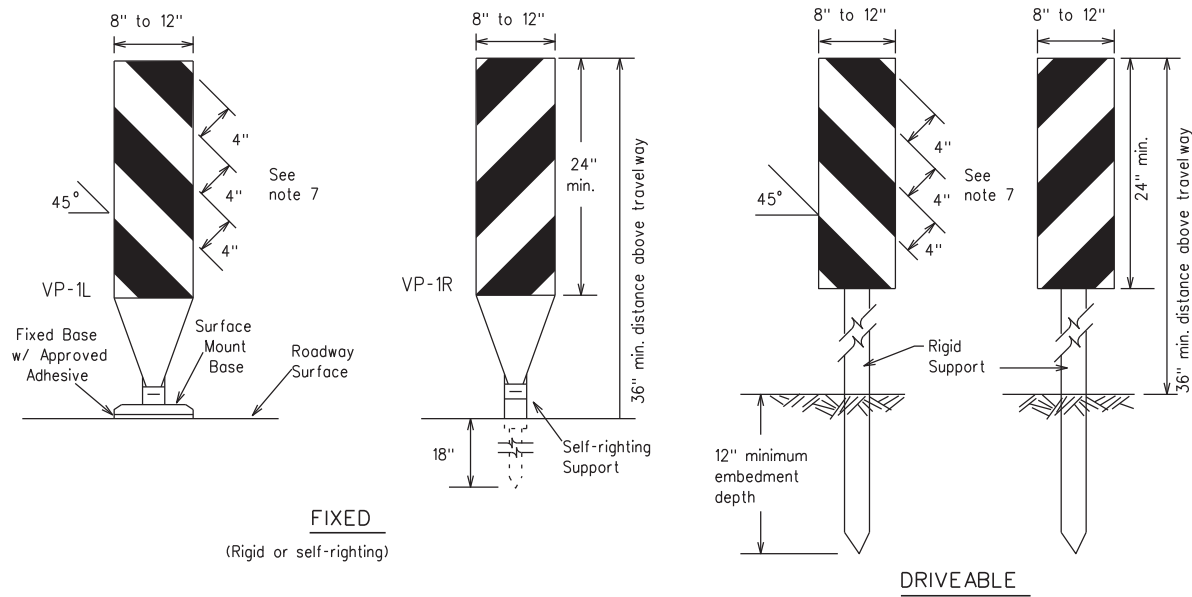

**FIXED**  
(Rigid or self-righting)


**DRIVEABLE**

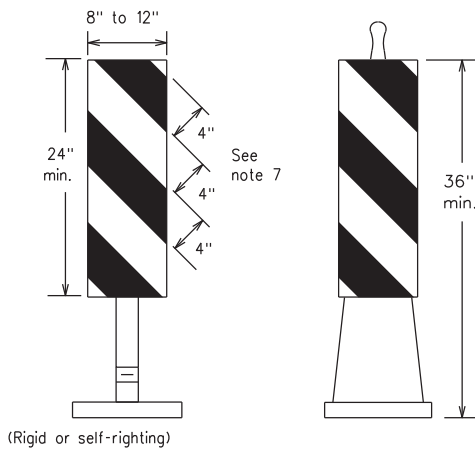

**PORTABLE**


**VERTICAL PANELS (VPs)**

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

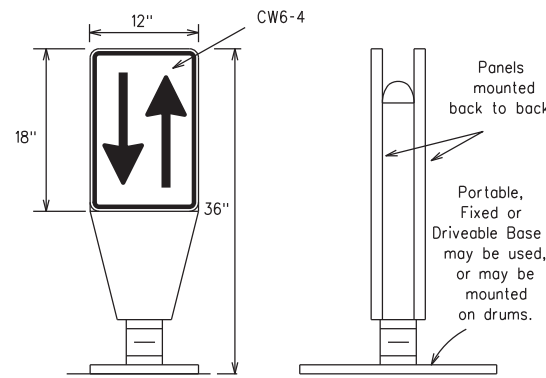

**OPPOSING TRAFFIC LANE DIVIDERS (OTLD)**


- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VP's.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VP's placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

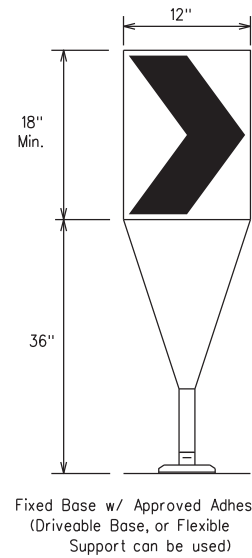

Fixed Base w/ Approved Adhesive  
(Driveable Base, or Flexible Support can be used)

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B or Type C conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

**CHEVRONS**



**LONGITUDINAL CHANNELIZING DEVICES (LCD)**

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

**WATER BALLASTED SYSTEMS USED AS BARRIERS**

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

**HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS**

**GENERAL NOTES**

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

x x Taper lengths have been rounded off.  
 L-Length of Taper (FT.) W-Width of Offset (FT.)  
 S-Posted Speed (MPH)

**SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS**

SHEET 9 OF 12



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC(9)-21**

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	MONTAGUE, ETC.	22	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:41 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001.MBGF Cooke FY2024.4 - Design\Master Design File\BC (10)-21.dgn


### TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.


Barricades shall NOT be used as a sign support.




### TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

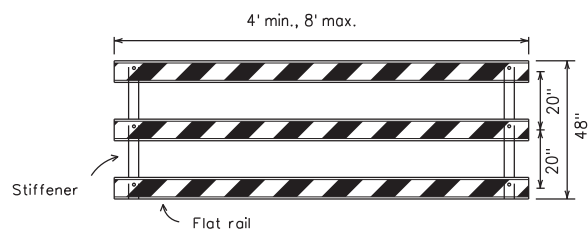

### TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

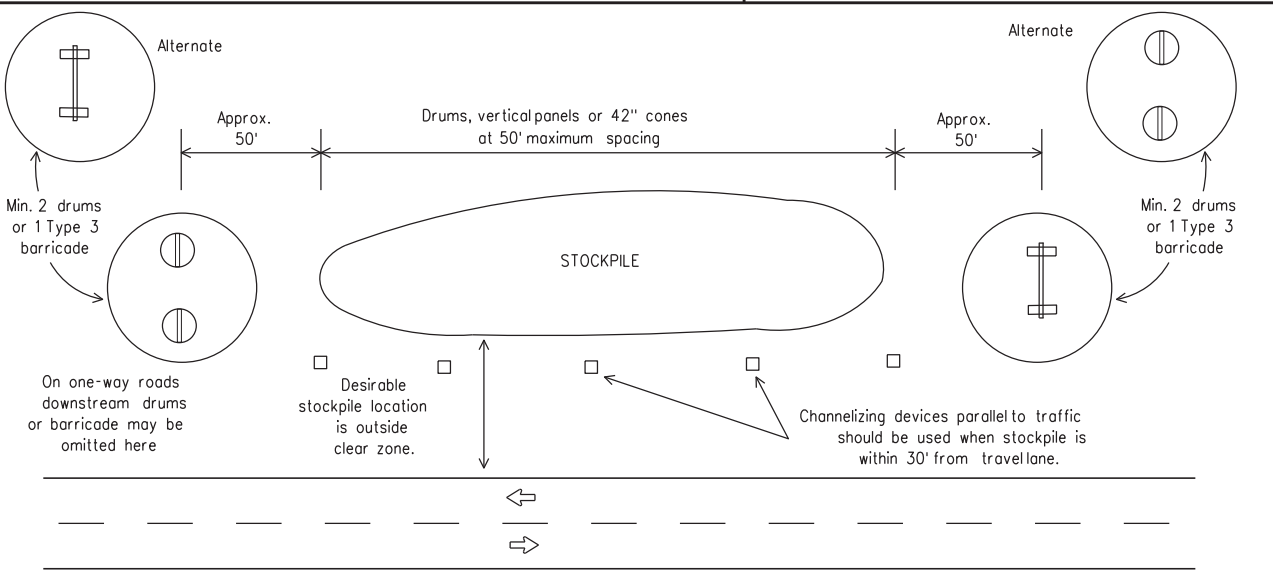


### TRAFFIC CONTROL FOR MATERIAL STOCKPILES

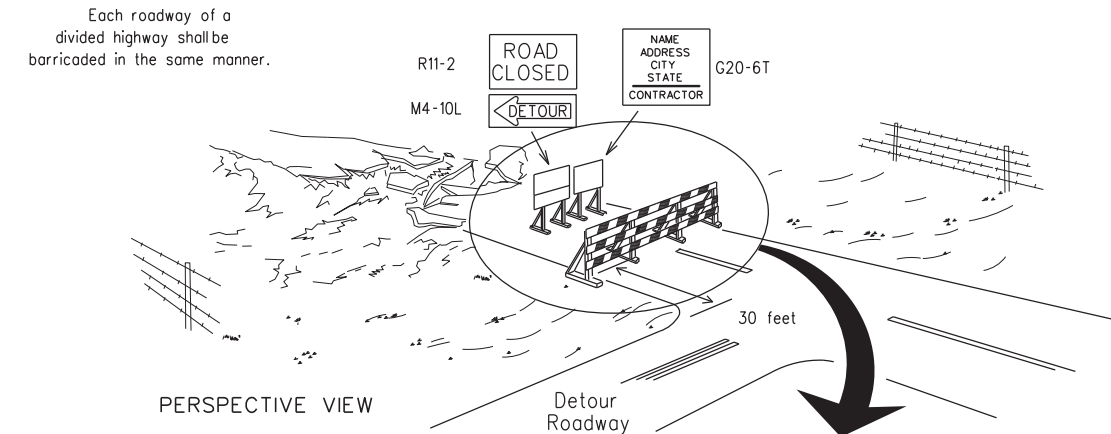

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

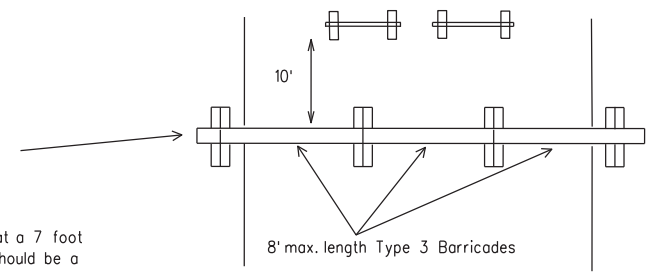


PLAN VIEW

### TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

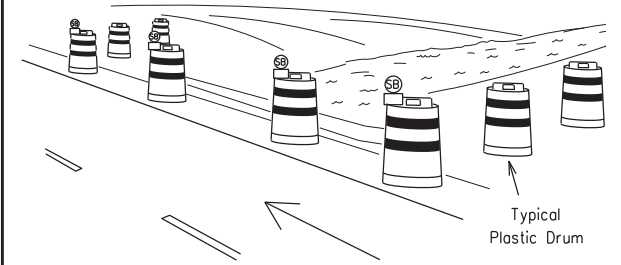

PERSPECTIVE VIEW


1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be substituted for drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

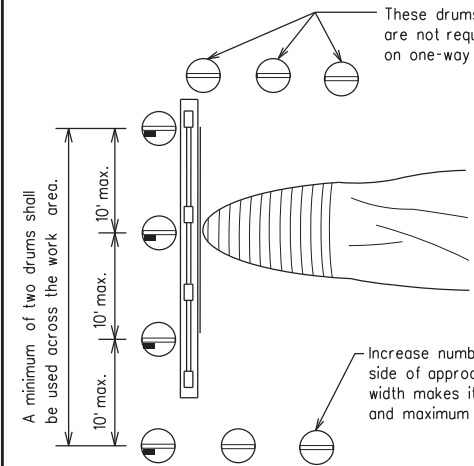

PLAN VIEW

### CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

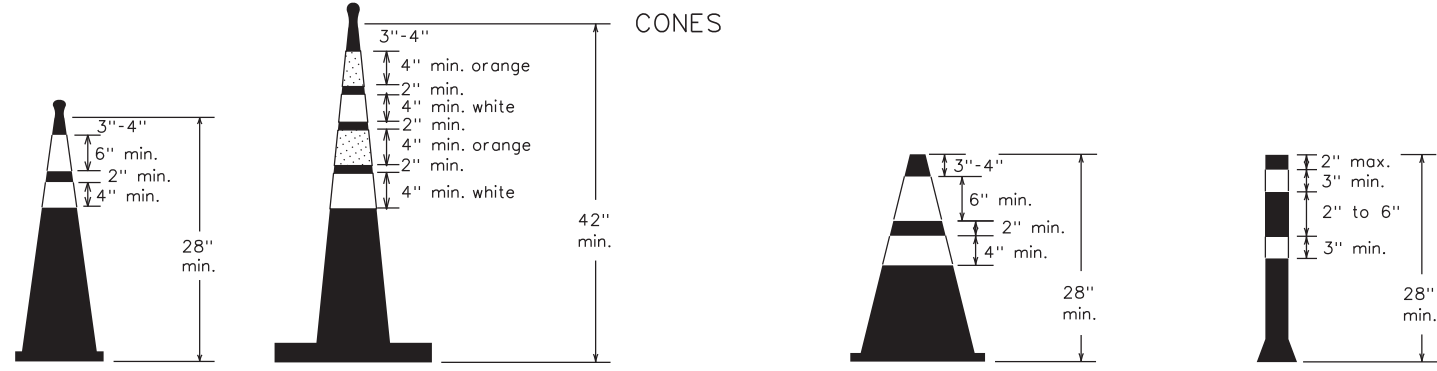

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.  
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



## BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

### BC(10)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	MONTAGUE, ETC.	23	

## WORK ZONE PAVEMENT MARKINGS

### GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

### RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

### PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


### MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

### REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

## Temporary Flexible-Reflective Roadway Marker Tabs

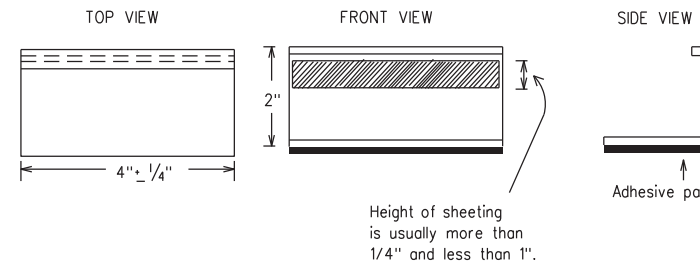

STAPLES OR NAILS SHALL NOT BE USED TO SECURE  
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER  
TABS TO THE PAVEMENT SURFACE

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
  - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
  - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

### RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:  
 YELLOW - (two amber reflective surfaces with yellow body).  
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



## BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21





FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
2-98 9-07 5-21	DIST	COUNTY	SHEET NO.	
1-02 7-13	WFS	MONTAGUE, ETC.	24	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:41 PM  
 FILE: I:\WFSAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master\_Design File\BC (11)-21.dgn





# PAVEMENT MARKING PATTERNS

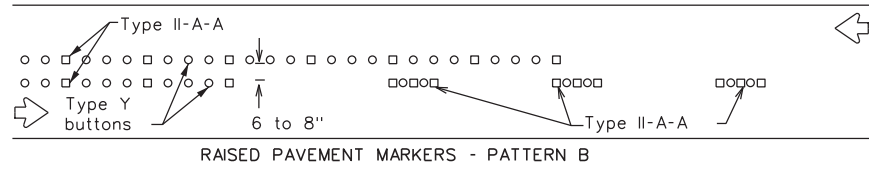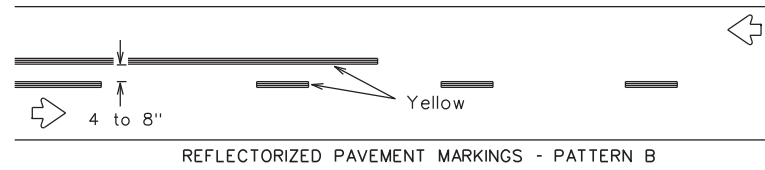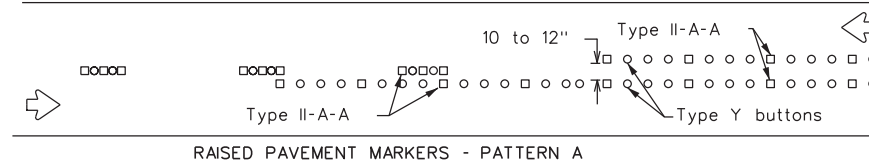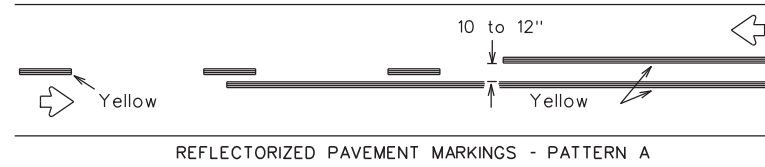



Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

## CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

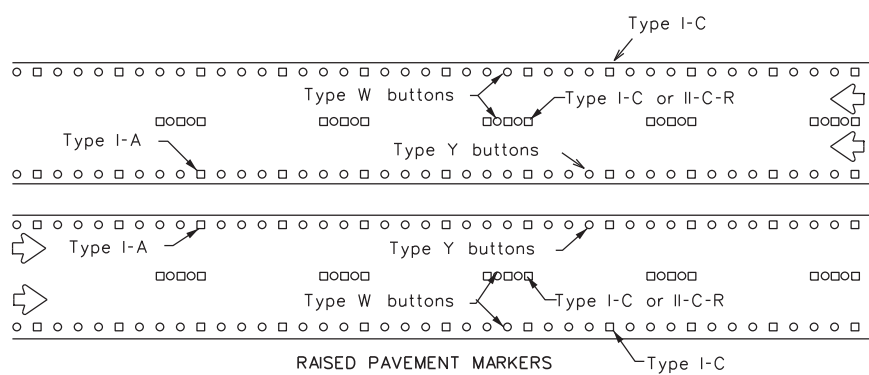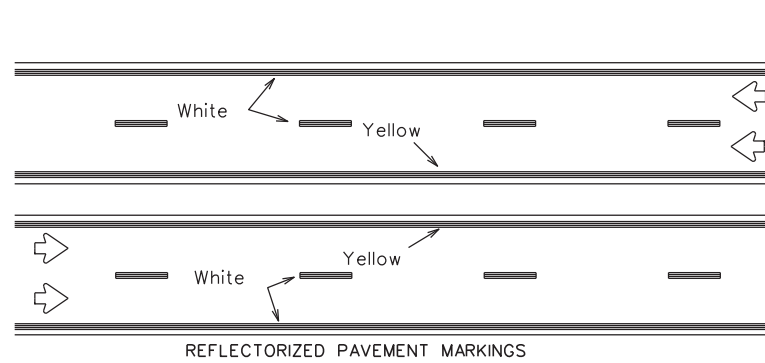



Prefabricated markings may be substituted for reflectorized pavement markings.

## EDGE & LANE LINES FOR DIVIDED HIGHWAY

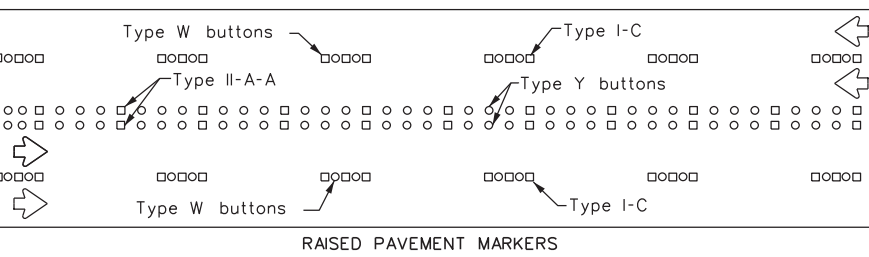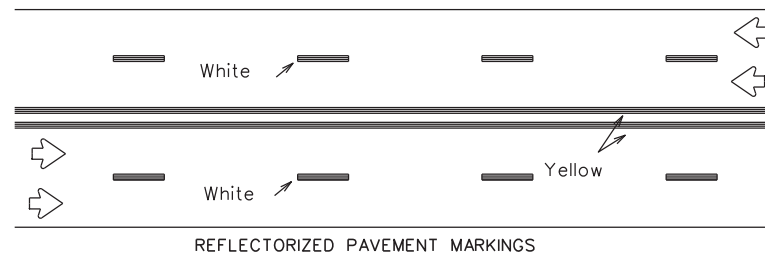

Prefabricated markings may be substituted for reflectorized pavement markings.






## LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

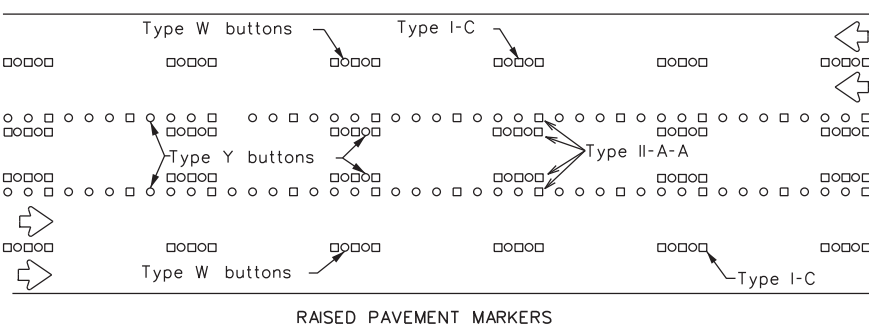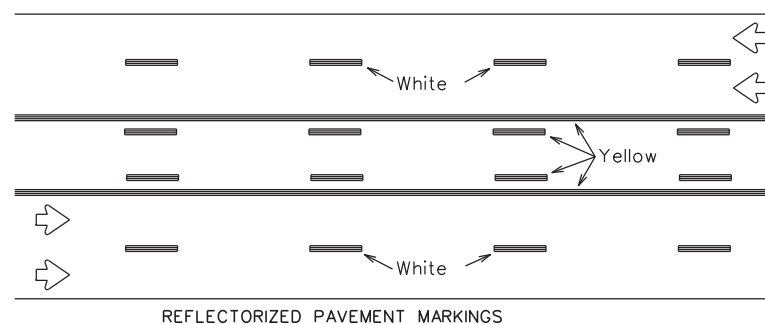

Prefabricated markings may be substituted for reflectorized pavement markings.


## TWO-WAY LEFT TURN LANE

# STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

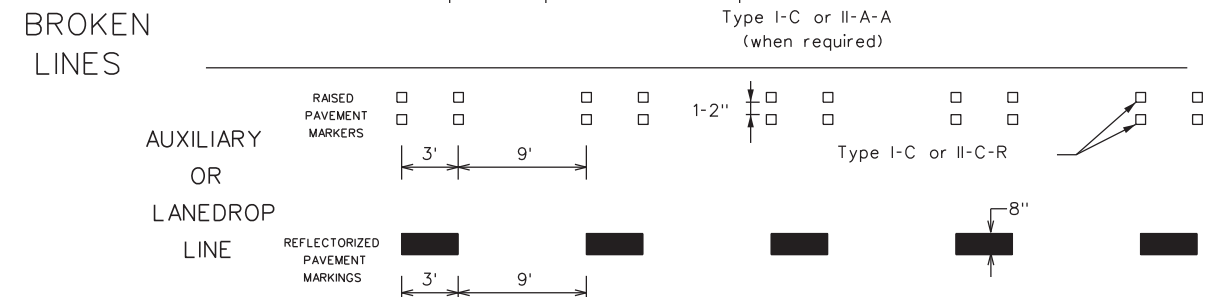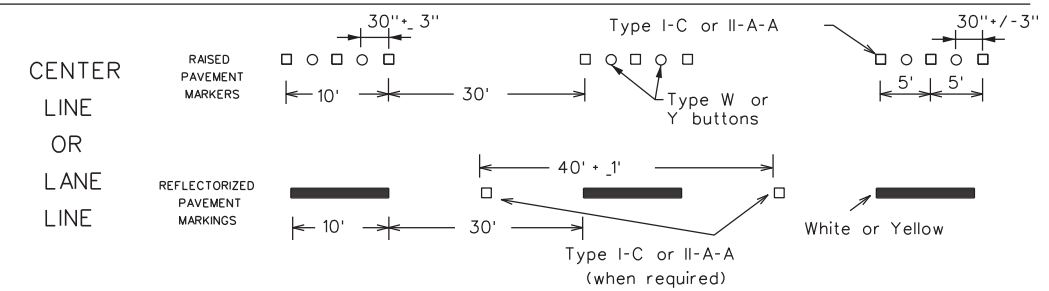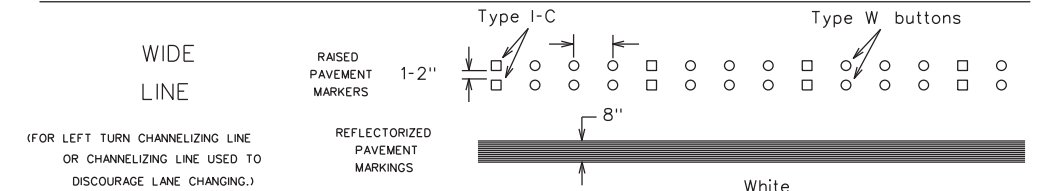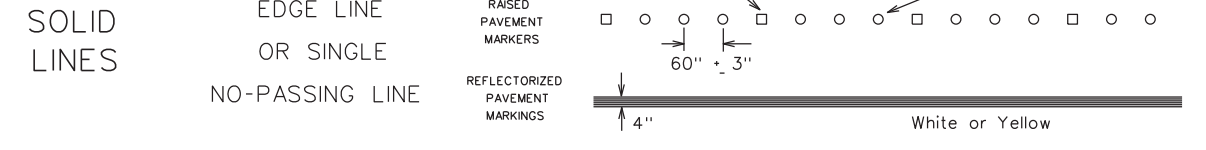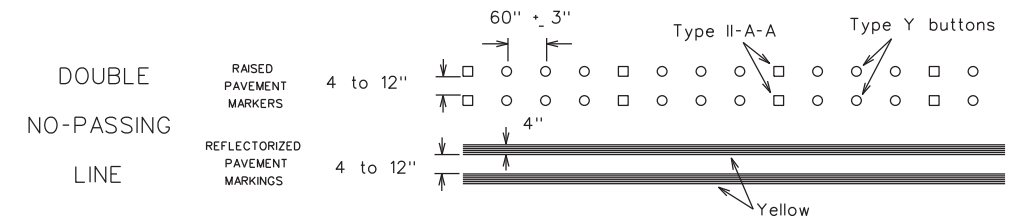

## REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

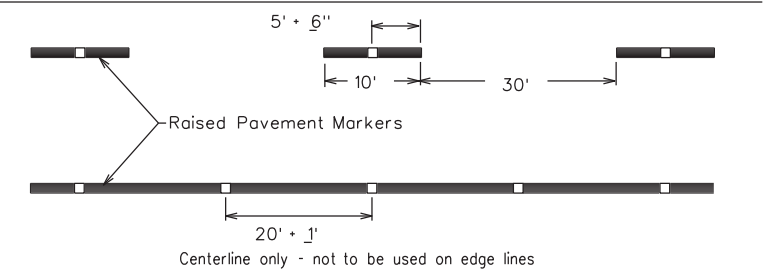

SHEET 12 OF 12



## BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."




FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1998	CONT: 6421	SECT: 35	JOB: 001	HIGHWAY: US 287, ETC.
REVISIONS				
1-97 9-07 5-21				
2-98 7-13				
11-02 8-14				
DIST: WFS	COUNTY: MONTAGUE, ETC.	SHEET NO. 25		

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:38:42 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024-4 - Design\Master\_Design File\BC (12)-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided. The user of this standard is advised to verify the accuracy of the information provided.

DATE: 12/20/2023 4:38:42 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024-4 - Design\11-18-23\11-18-23.dwg

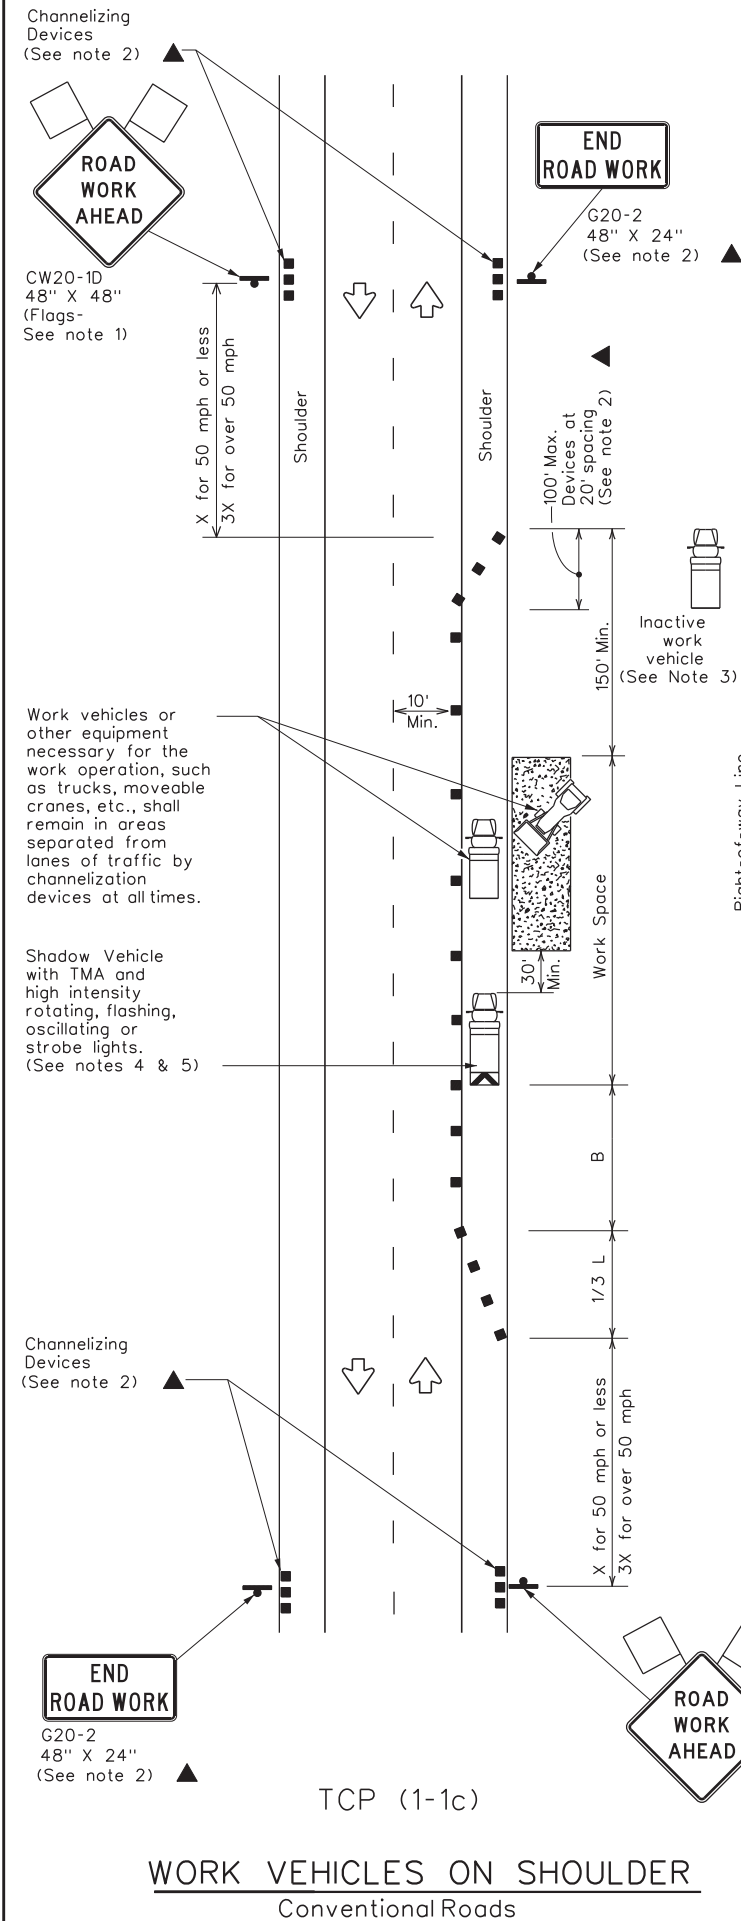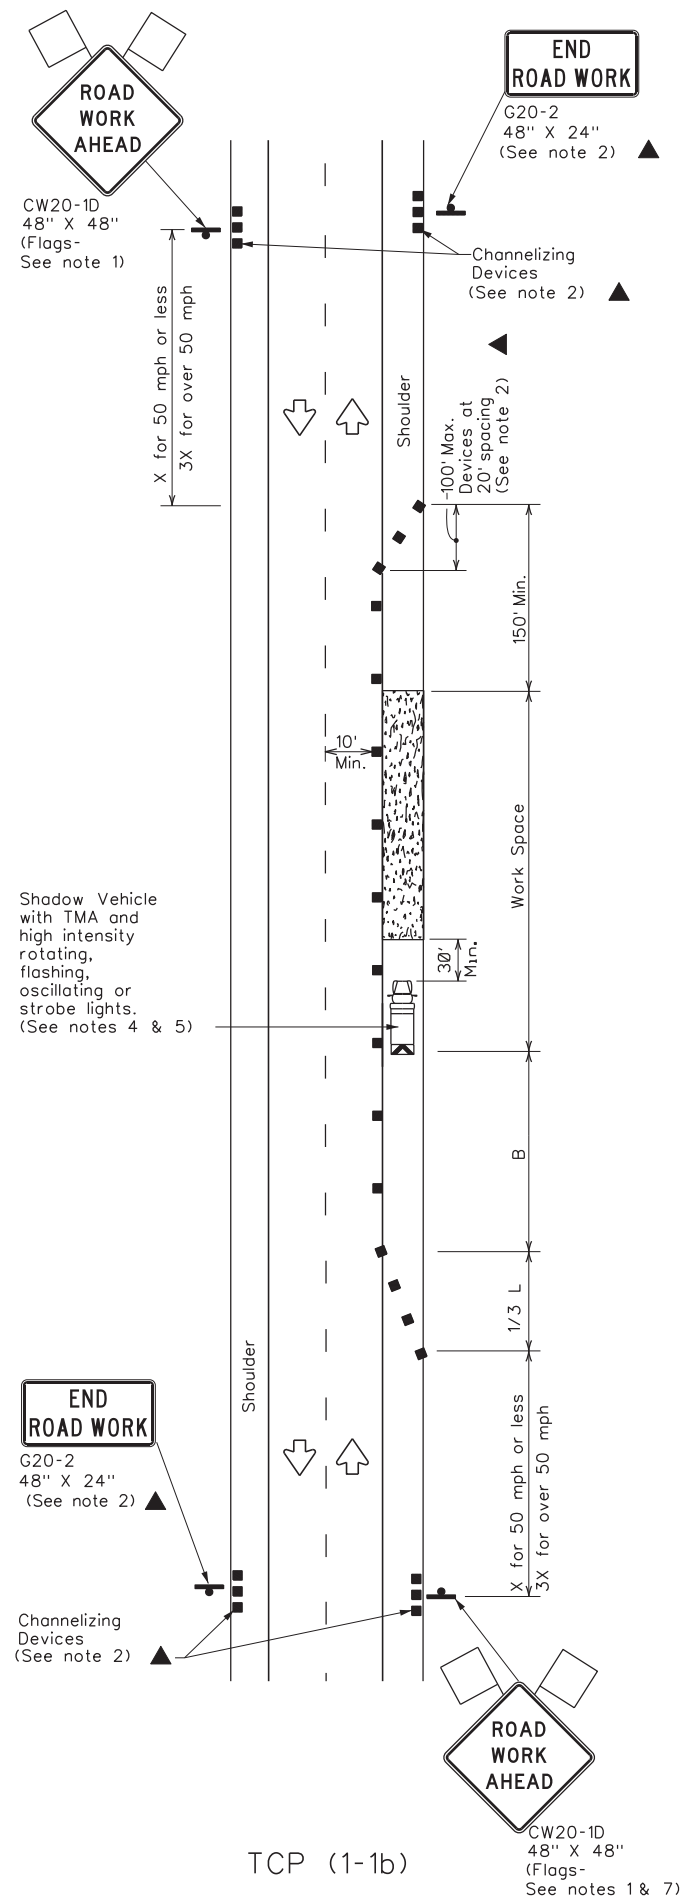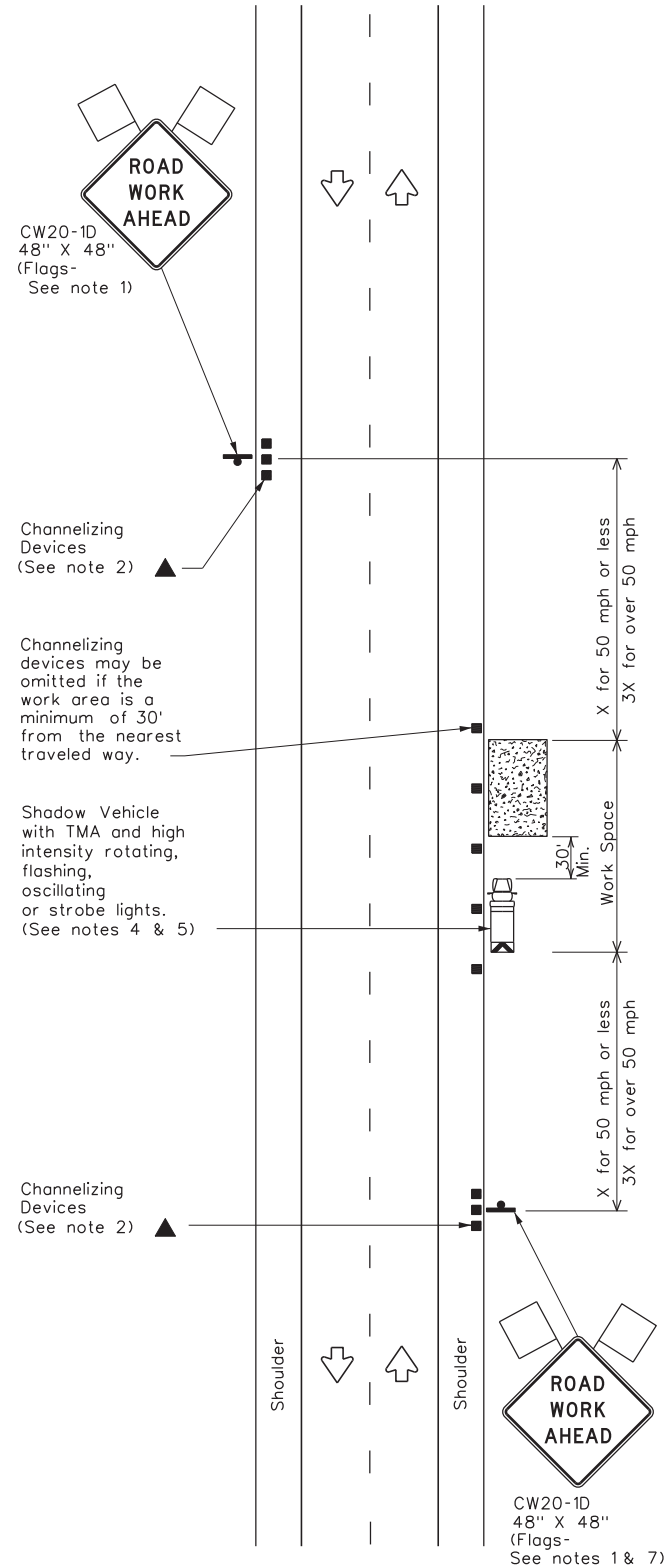

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

**GENERAL NOTES**

- Flags attached to signs where shown are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
- CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.



**TRAFFIC CONTROL PLAN**  
**CONVENTIONAL ROAD**  
**SHOULDER WORK**




**TCP(1-1)-18**

FILE: tcp1-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT REVISIONS	CON:	SECT:	JOB:	HIGHWAY:
2-94 4-98	6421	35	001	US 287, ETC.
8-95 2-12	DIST:	COUNTY:	SHEET NO.:	
1-97 2-18	WFS	MONTAGUE, ETC.	26	



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information presented herein. For more information, visit <http://www.txdot.gov>.

DATE: 12/20/2023 4:38:43 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\11-15-23\6421-35-001.dgn

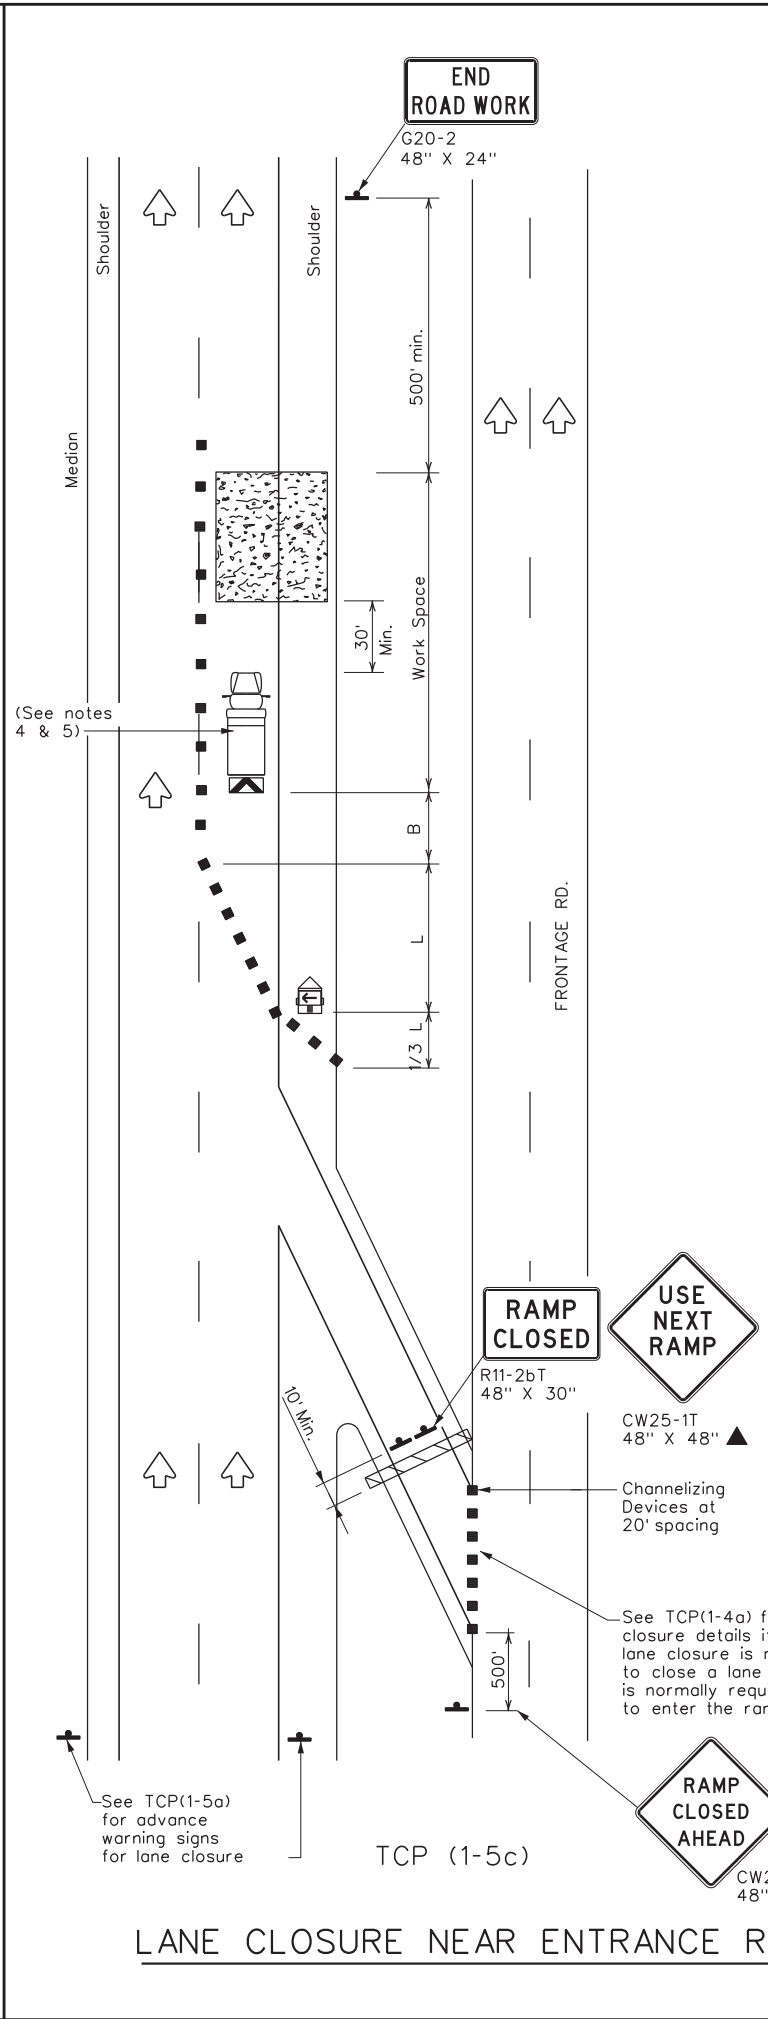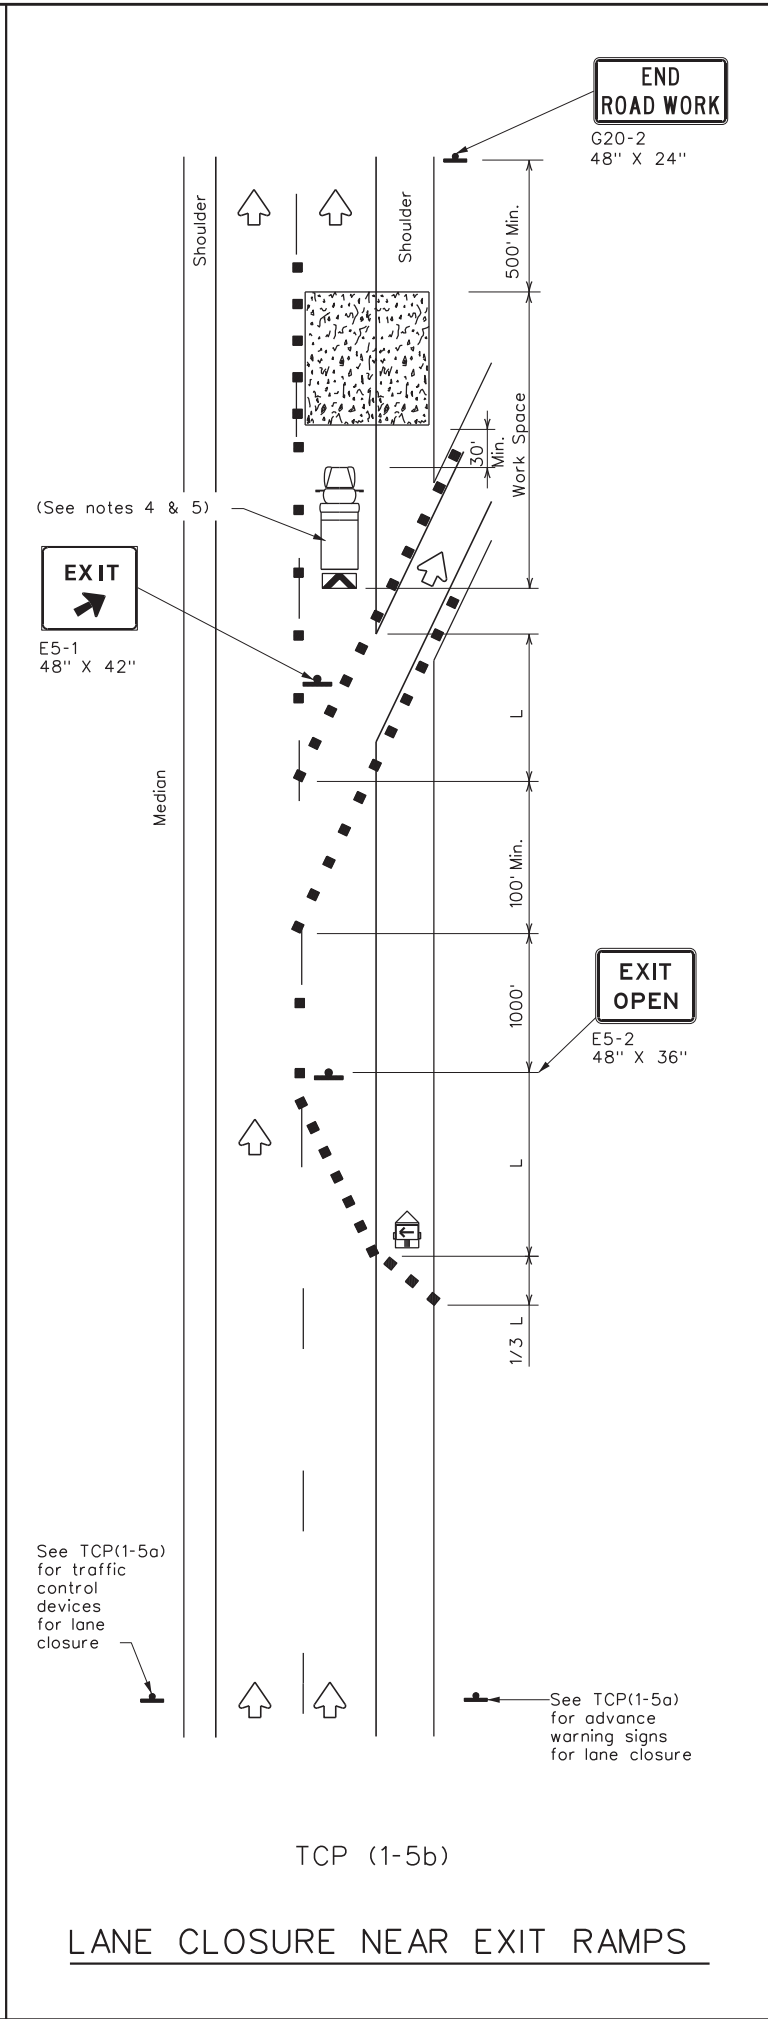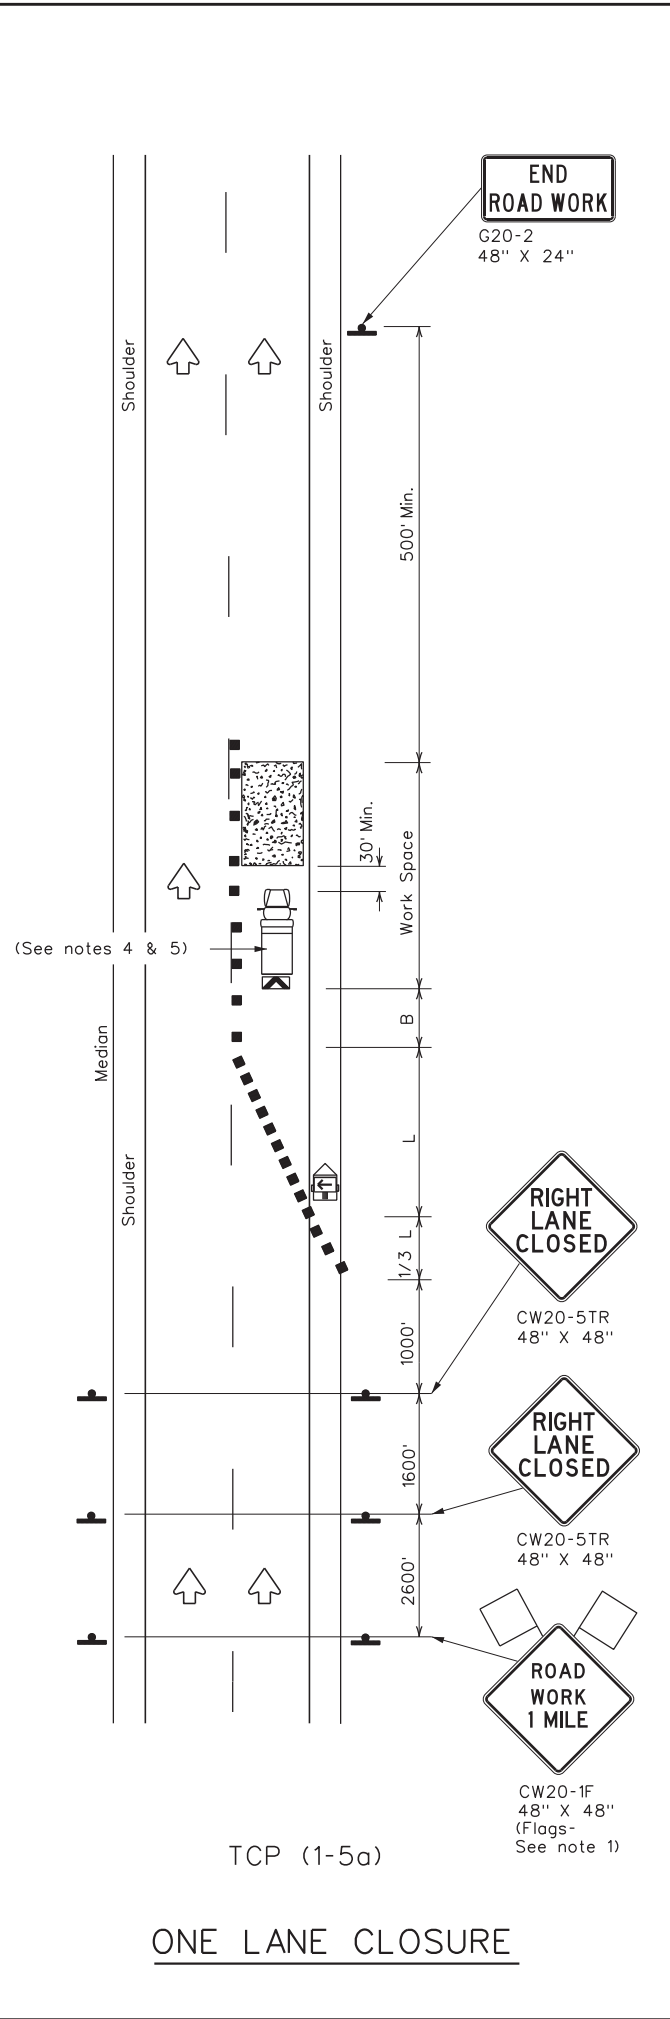

LEGEND							
	Type 3 Barricade		Channelizing Devices				
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)				
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)				
	Sign		Traffic Flow				
	Flag		Flagger				

Posted Speed *	Formula	Minimum Desirable Taper Lengths * x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
		✓		

**GENERAL NOTES**

- Flags attached to signs where shown, are REQUIRED.
- All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
- Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
- Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

Texas Department of Transportation  
 Traffic Operations Division Standard

**TRAFFIC CONTROL PLAN**  
**LANE CLOSURES FOR**  
**DIVIDED HIGHWAYS**

**TCP(1-5)-18**




FILE: tcp1-5-18.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2012	CON:	SECT:	JOB:	HIGHWAY:
2-18 REVISIONS	6421	35	001	US 287, ETC.
	DIST:	COUNTY:	SHEET NO.	
	WFS	MONTAGUE, ETC.	28	





DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information provided on this drawing. If any error or omission results in damage, the user shall be responsible for the same.

DATE: 12/20/2023 4:38:45 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\MBGF.dwg

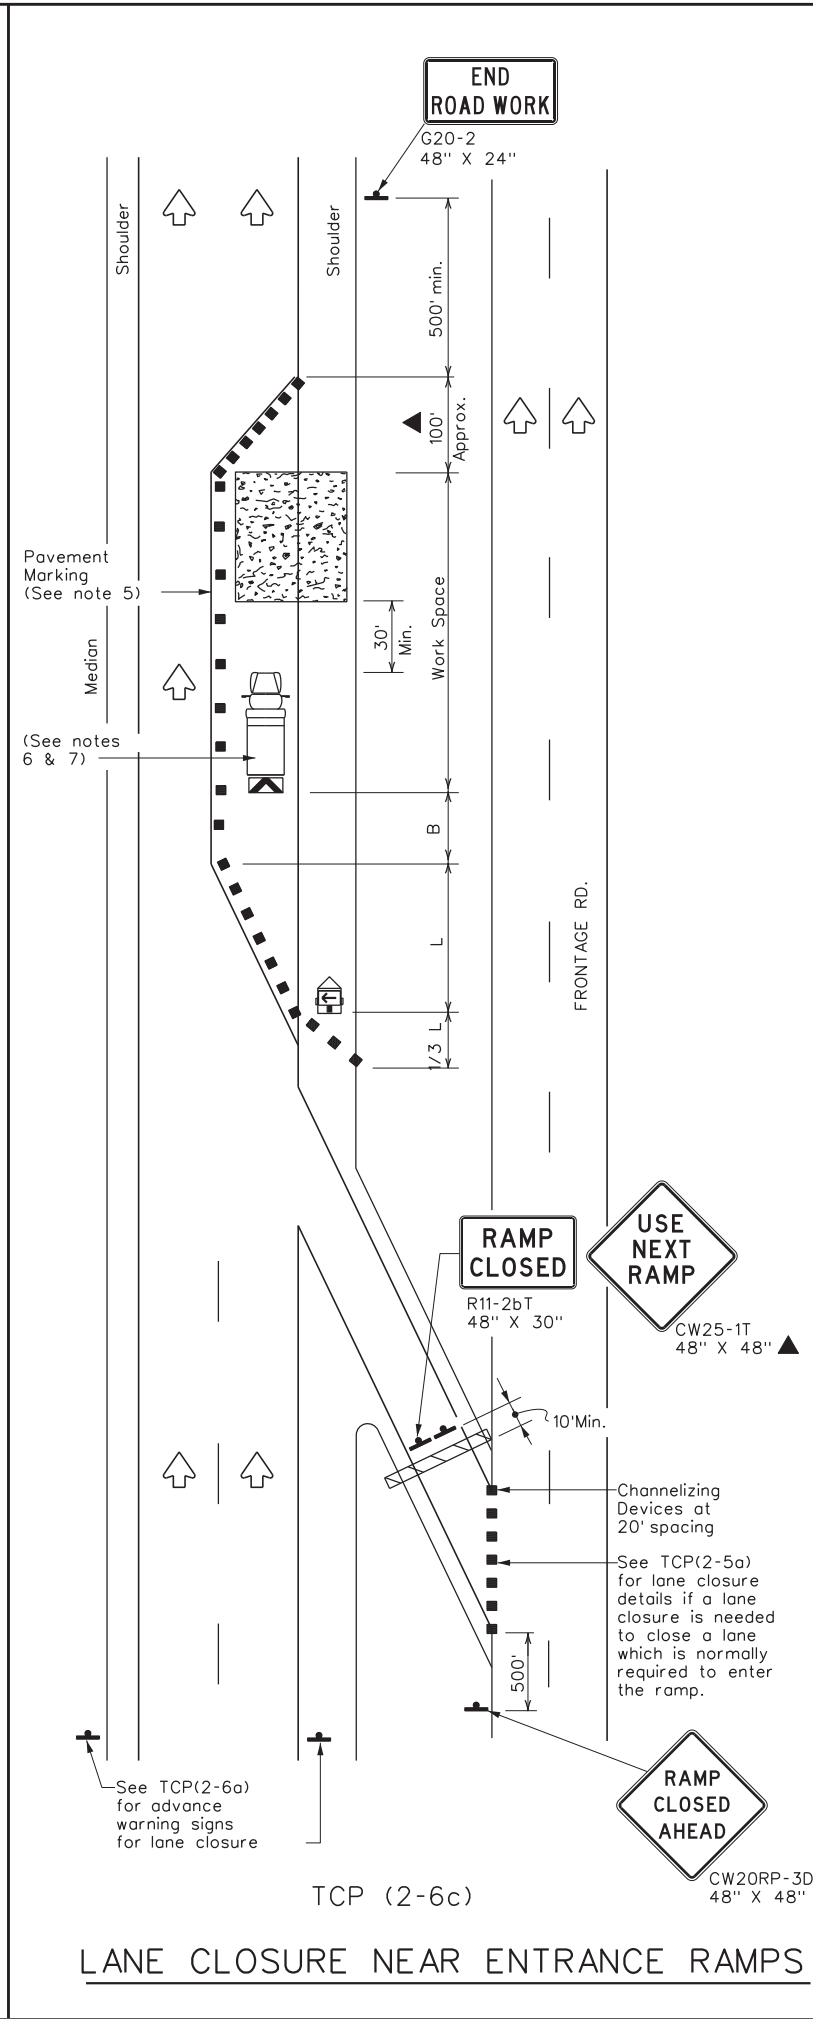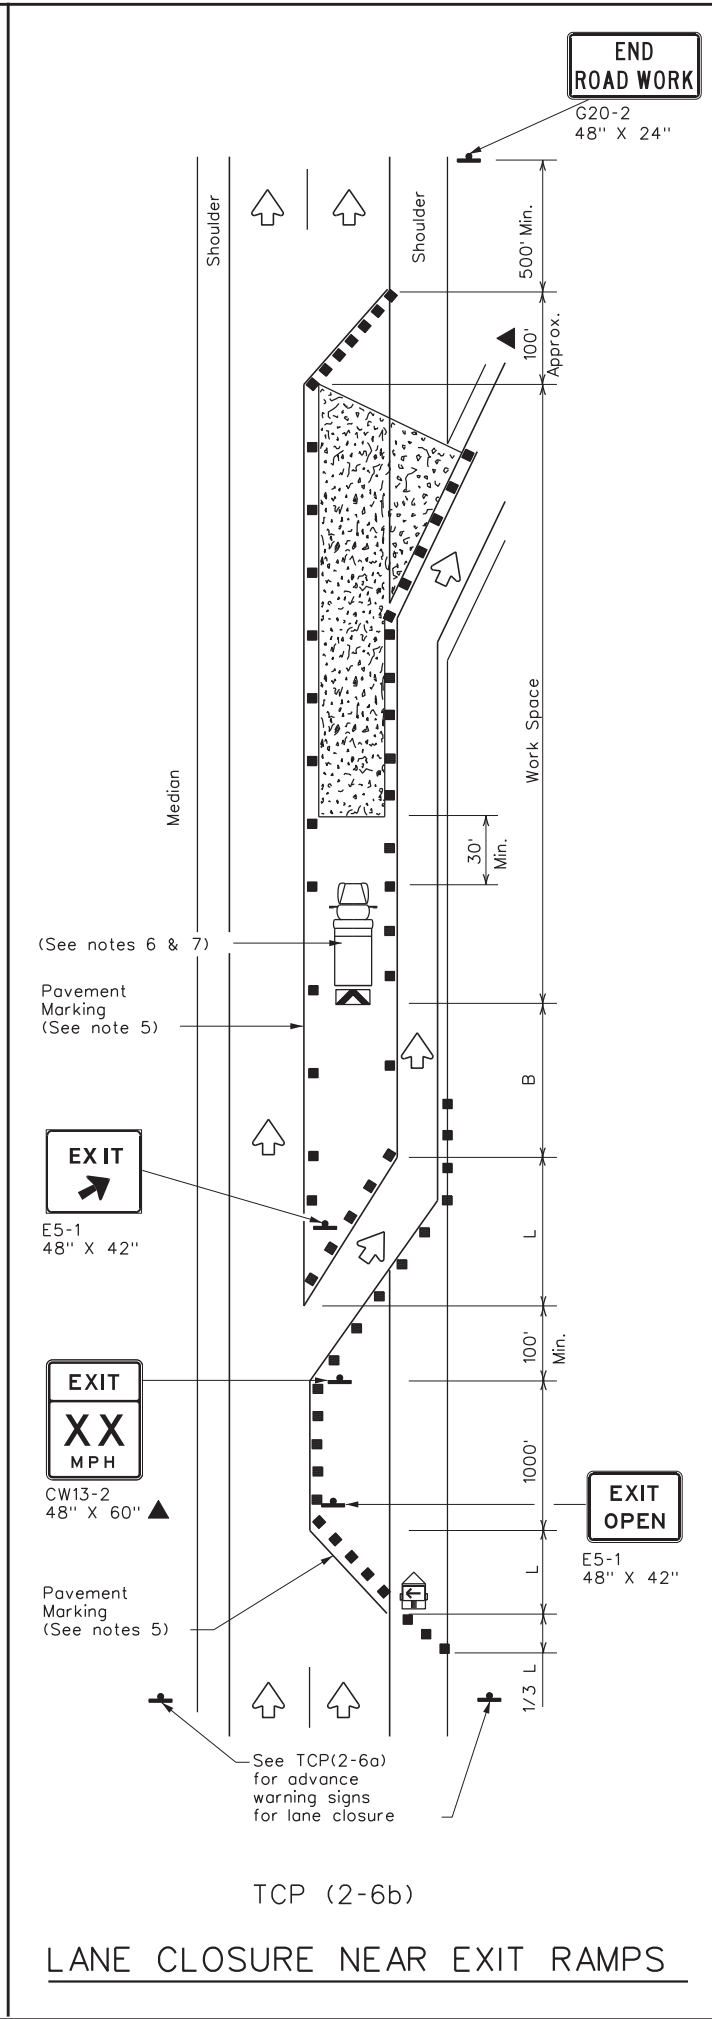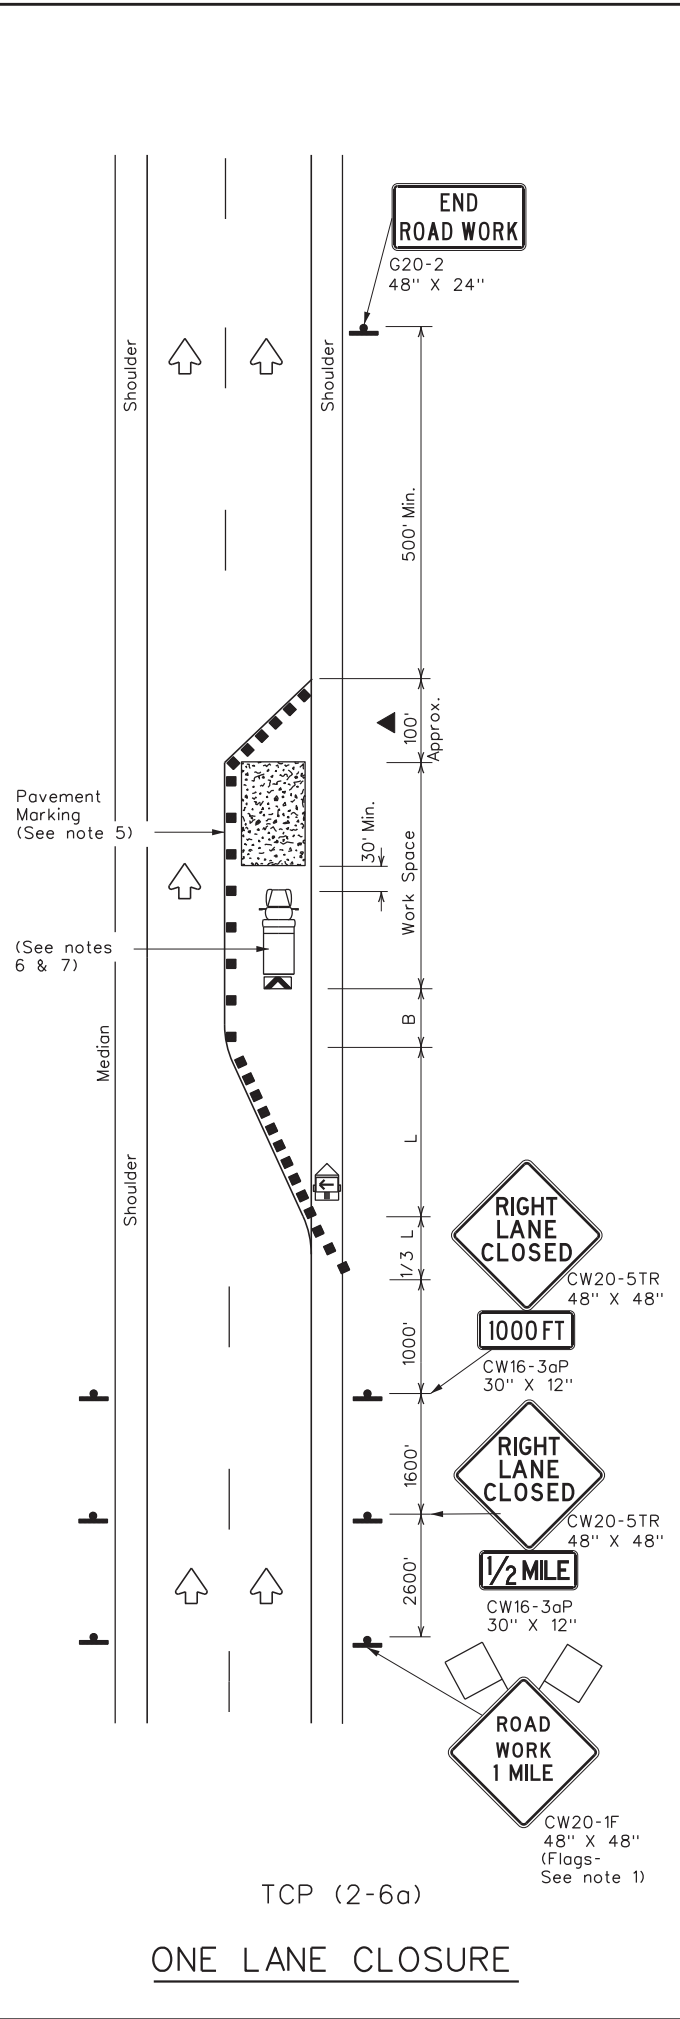

**LEGEND**

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed x	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

**TYPICAL USAGE**

	MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
				✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
  - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
  - Channelizing devices used to close lanes may be supplemented with the Chevron Alignment Sign placed on every other channelizing device. Chevrons may be attached to plastic drums as per BC Standards.
  - Channelizing devices used along the work space or along tangent sections may be supplemented with vertical panels (VP) placed on every other channelizing device. If night time conditions make it difficult to see at least two VPs, the VPs may be placed on each channelizing device.
  - The placement of pavement markings may be omitted on intermediate-term stationary work zones with the approval of the Engineer.
  - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
  - Additional Shadow Vehicles with TMAs may be positioned in each closed lane, on the shoulder or off the paved surface, next to those shown in order to protect a wider work space.

**Texas Department of Transportation**  
 Traffic Operations Division Standard


**TRAFFIC CONTROL PLAN  
 LANE CLOSURES ON  
 DIVIDED HIGHWAYS**

**TCP(2-6)-18**


FILE: tcp2-6-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CON:	SECT:	JOB:	HIGHWAY:
REVISIONS	6421	35	001	US 287, ETC.
2-94 4-98	DIST:	COUNTY:	SHEET NO.:	
8-95 2-12	WFS	MONTAGUE, ETC.	31	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided in this standard.

DATE: 12/20/2023 4:38:45 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\MBGF\6421-35-001.dgn

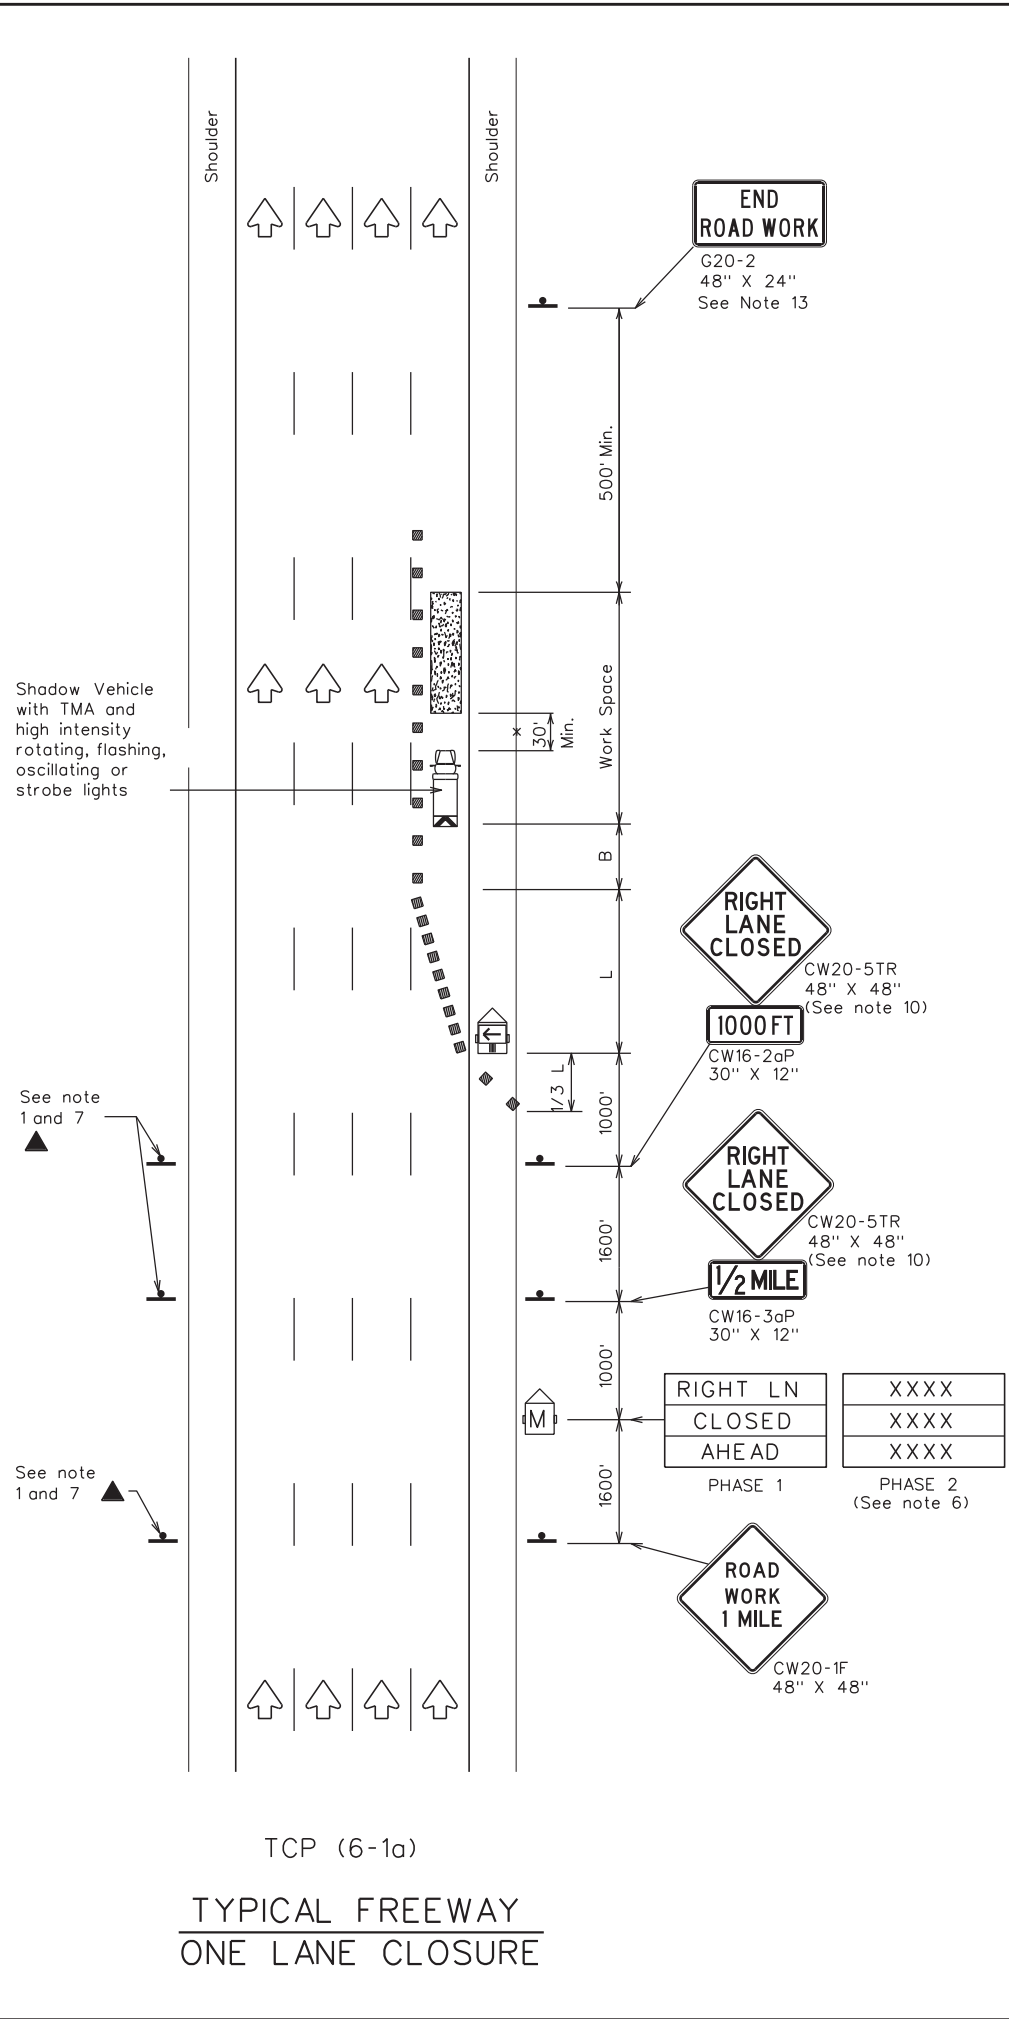

TCP (6-1a)  
 TYPICAL FREEWAY  
 ONE LANE CLOSURE

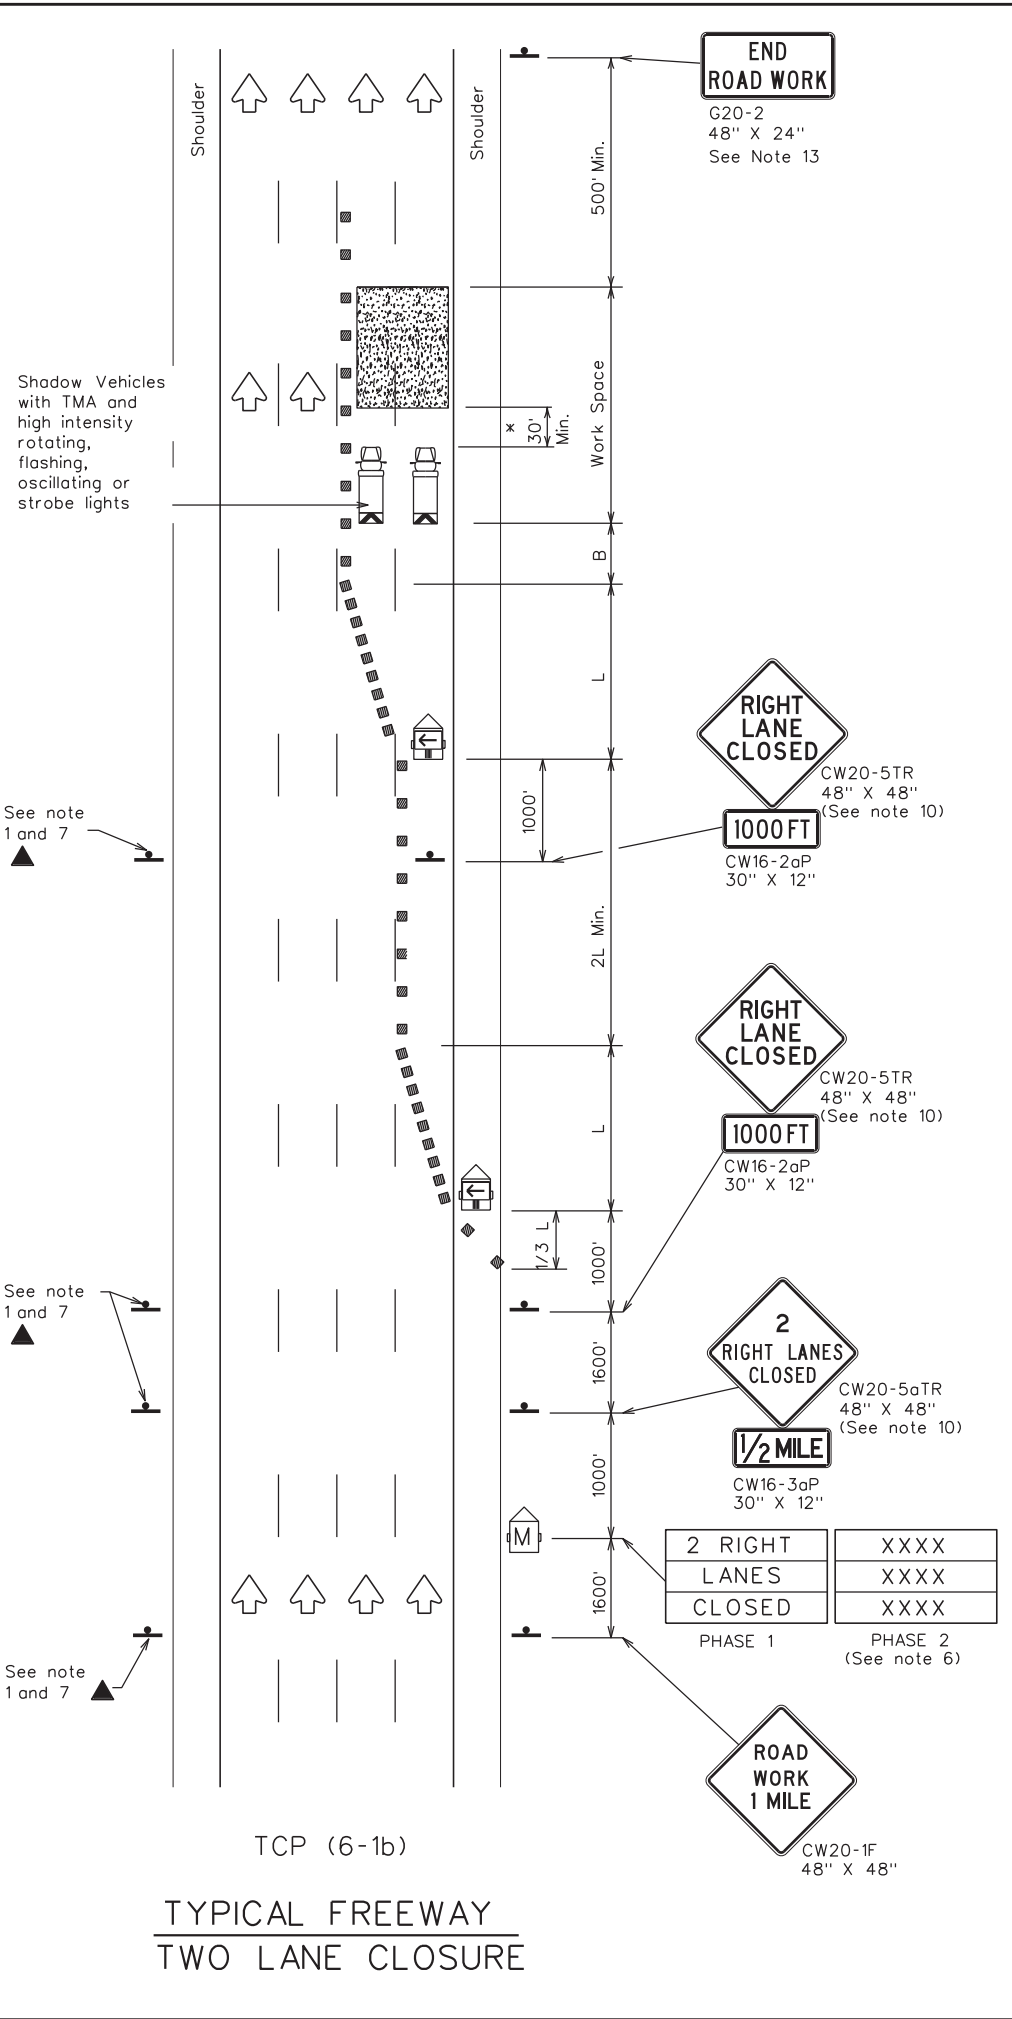

TCP (6-1b)  
 TYPICAL FREEWAY  
 TWO LANE CLOSURE

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed	Formula	Minimum Desirable Taper Lengths "L" x x			Suggested Maximum Spacing of Channelizing Devices		Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent	
45	L = WS	450'	495'	540'	45'	90'	195'
50		500'	550'	600'	50'	100'	240'
55		550'	605'	660'	55'	110'	295'
60		600'	660'	720'	60'	120'	350'
65		650'	715'	780'	65'	130'	410'
70		700'	770'	840'	70'	140'	475'
75		750'	825'	900'	75'	150'	540'
80		800'	880'	960'	80'	160'	615'

\*\* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	

GENERAL NOTES

- All traffic control devices illustrated are REQUIRED. Devices denoted with the triangle symbol may be omitted when stated elsewhere in the plans.
- Drums or 42" cones are the typical channelizing devices. For Intermediate Term Stationary work, drums shall be used on tapers with drums or 42" cones used on tangent sections. Other channelizing devices may be used as directed by the Engineer.
- All construction signs and barricades placed during any phase of work shall remain in place until removal is approved by the Engineer.
- The Engineer may direct the Contractor to furnish additional signs and barricades as required to maintain traffic flow, detours and motorist safety during construction.
- Static message boards or changeable message signs stating the date and duration of ramp or freeway lane closures shall be placed a minimum of seven (7) calendar days in advance of the actual closure.
- Phase 2 of the PCMS message should include appropriate information formatted as shown on BC(6), such as "MERGE LEFT," recommended advisory speed, delay information, or other specific warnings.
- Duplicate construction warning signs should be erected on the medians side of freeways where median width will permit and traffic volume justifies the signing.
- The number of closed lanes may be increased provided the spacing of traffic control devices, taper lengths and tangent lengths meet the requirements of the TMUTCD.
- Warning signs for intermediate term stationary work should be mounted at 7' to the bottom of the sign.
- Warning signs shown shall be appropriately altered for left lane closures. When signs are mounted at 7' height for short term stationary or short duration work, sign versions shown in the SHSD for Texas with distances on the sign face rather than mounted on a plaque below the sign may be used.
- When possible, PCMS units should be located in advance of the last available exit ramp prior to the lane closure to allow motorists an alternate route. They may also be relocated to improve advance warning in case of unanticipated queuing or congestion.
- For Intermediate Term Stationary work at night, floodlights should be used to illuminate the work area and equipment crossings. Floodlights shall not produce a disabling glare condition for road users or workers.
- The END ROAD WORK (G20-2) sign may be omitted when it conflicts with G20-2 signs already in place on the project.

\* A shadow vehicle equipped with a Truck Mounted Attenuator is typically required. A shadow vehicle equipped with a TMA shall be used if it can be positioned 30' to 100' in advance of the area of crew exposure without adversely affecting the work performance.

Texas Department of Transportation  
 Traffic Operations Division Standard

## TRAFFIC CONTROL PLAN FREEWAY LANE CLOSURES

### TCP(6-1)-12

FILE: tcp6-1.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT February 1998	CONT: 6421	SECT: 35	JOB: 001	HIGHWAY: US 287, ETC.
8-12	DIST: WFS	COUNTY: MONTAGUE, ETC.	SHEET NO. 32	




**RUMBLE STRIP GENERAL NOTES**

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Removal of the Temporary Rumble Strips should be accomplished before removing the advance warning signs.
- Temporary Rumble Strips, and the rumble strip functioning as a STOP bar, should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Warning sign and rumble strip sequence in opposite direction is same as below

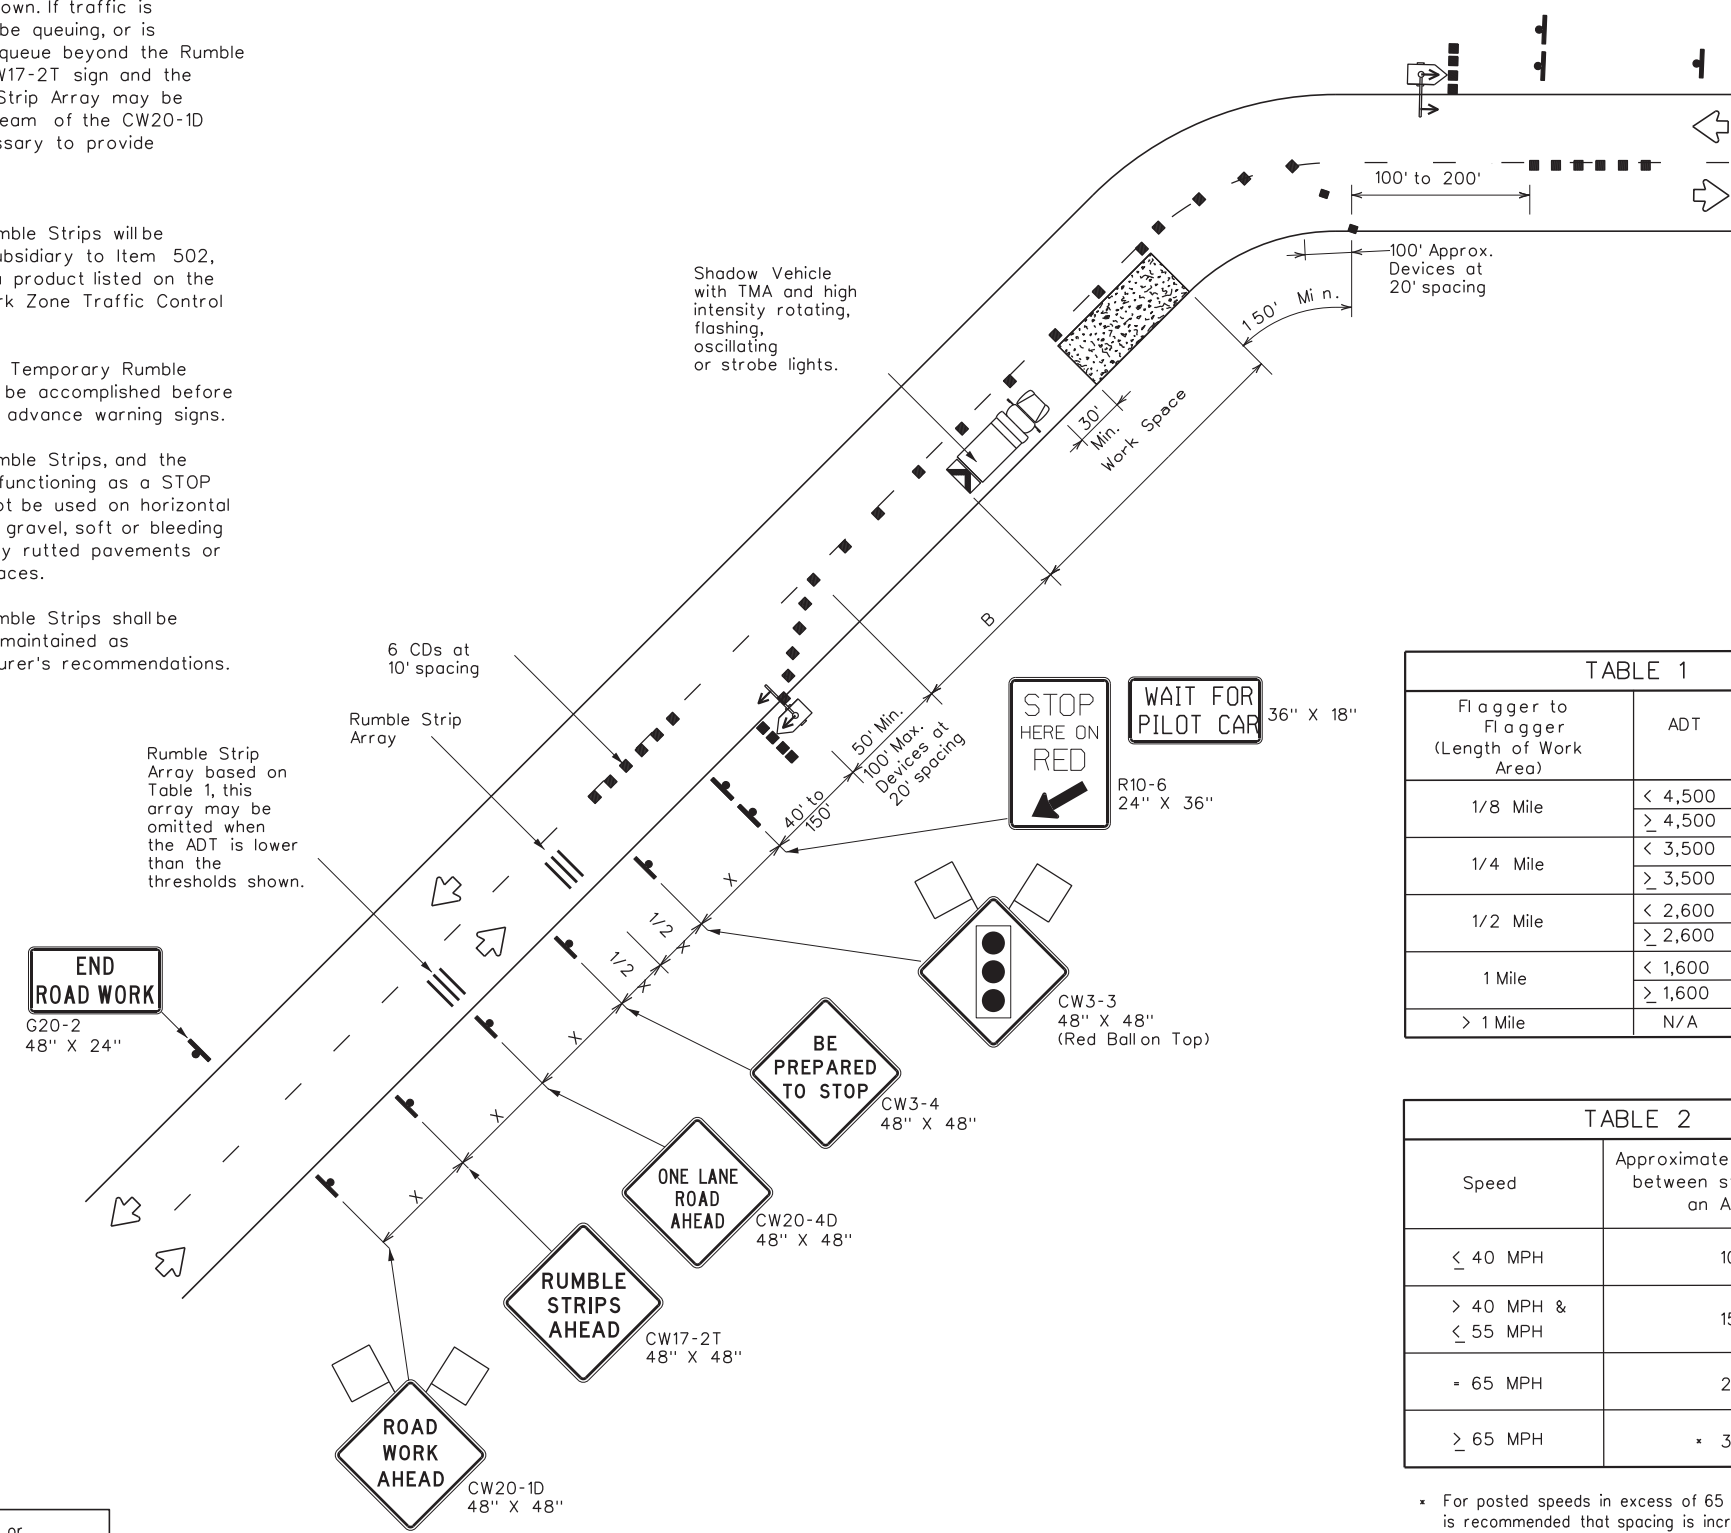

For construction or maintenance contract work, specific project requirements for shadow vehicles can be found in the project GENERAL NOTES for Item 502, Barricades, Signs and Traffic Handling.

**ONE LANE TWO-WAY CONTROL WITH PORTABLE TRAFFIC SIGNAL & RUMBLE STRIPS**

**TABLE 1**

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500 ≥ 4,500	1 2
1/4 Mile	< 3,500 ≥ 3,500	1 2
1/2 Mile	< 2,600 ≥ 2,600	1 2
1 Mile	< 1,600 ≥ 1,600	1 2
> 1 Mile	N/A	2

**TABLE 2**

Speed	Approximate distance between strips in an Array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 65 MPH	20'
≥ 65 MPH	* 35'

\* For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

REVIEWED AND APPROVED BY DISTRICT SAFETY REVIEW TEAM 1-21-2022

**LEGEND**

	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Temporary or Portable Traffic Signal		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		

Posted Speed x	Formula	Minimum Desirable Taper Lengths x x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "x" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'


\* Conventional Roads Only  
 \*\* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT) S=Posted Speed(MPH)

**TYPICAL USAGE**

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

**TCP GENERAL NOTES**

- Flags attached to signs where shown are REQUIRED.
- Portable traffic signals should be located to provide adequate stopping sight distance for approaching motorists (See table above).
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- The R10-6 "STOP HERE ON RED" arrow sign shall be offset so as not to obscure the lenses of the Portable Traffic Signals.
- Proper alignment of overhead signal with on-coming lane should be ensured.
- For Short Duration and Short Term Stationary refer to WZ(RS)-22 for rumble strip placement and signs.
- Use of a pilot car is optional, if a pilot car is used it may control the operation of the signal and the "WAIT FOR PILOT CAR" sign is to be used as shown.
- If pilot car is used to guide vehicles through traffic control zone, vehicle shall have an identification name displayed and "PILOT CAR FOLLOW ME" (G20-4) sign or message board mounted in a conspicuous position on rear.
- Channelizing devices on the center-line may be omitted when a pilot car is leading traffic and approved by the Engineer.



12/21/2023

Texas Department of Transportation  
 Wichita Falls District  
**TRAFFIC CONTROL PLAN**  
**ONE LANE TWO-WAY CONTROL**  
**USING**  
**PORTABLE TRAFFIC SIGNAL**  
**& RUMBLE STRIPS**


© TxDOT May 2014

REVISIONS		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
CONT	SECT	JOB	HIGHWAY		
6421	35	001	US 287, ETC		
DIST	COUNTY		SHEET NO.		
WFS	MONTAGUE, ETC.		33		


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this standard. Design: M. S. G. / 11/15/2023. Correct results or damages resulting from its use.

DATE: 12/20/2023 4:38:46 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\11-15-23\6421-35-001-02-05-23.dwg

Warning sign and rumble strip sequence in opposite direction is same as below.

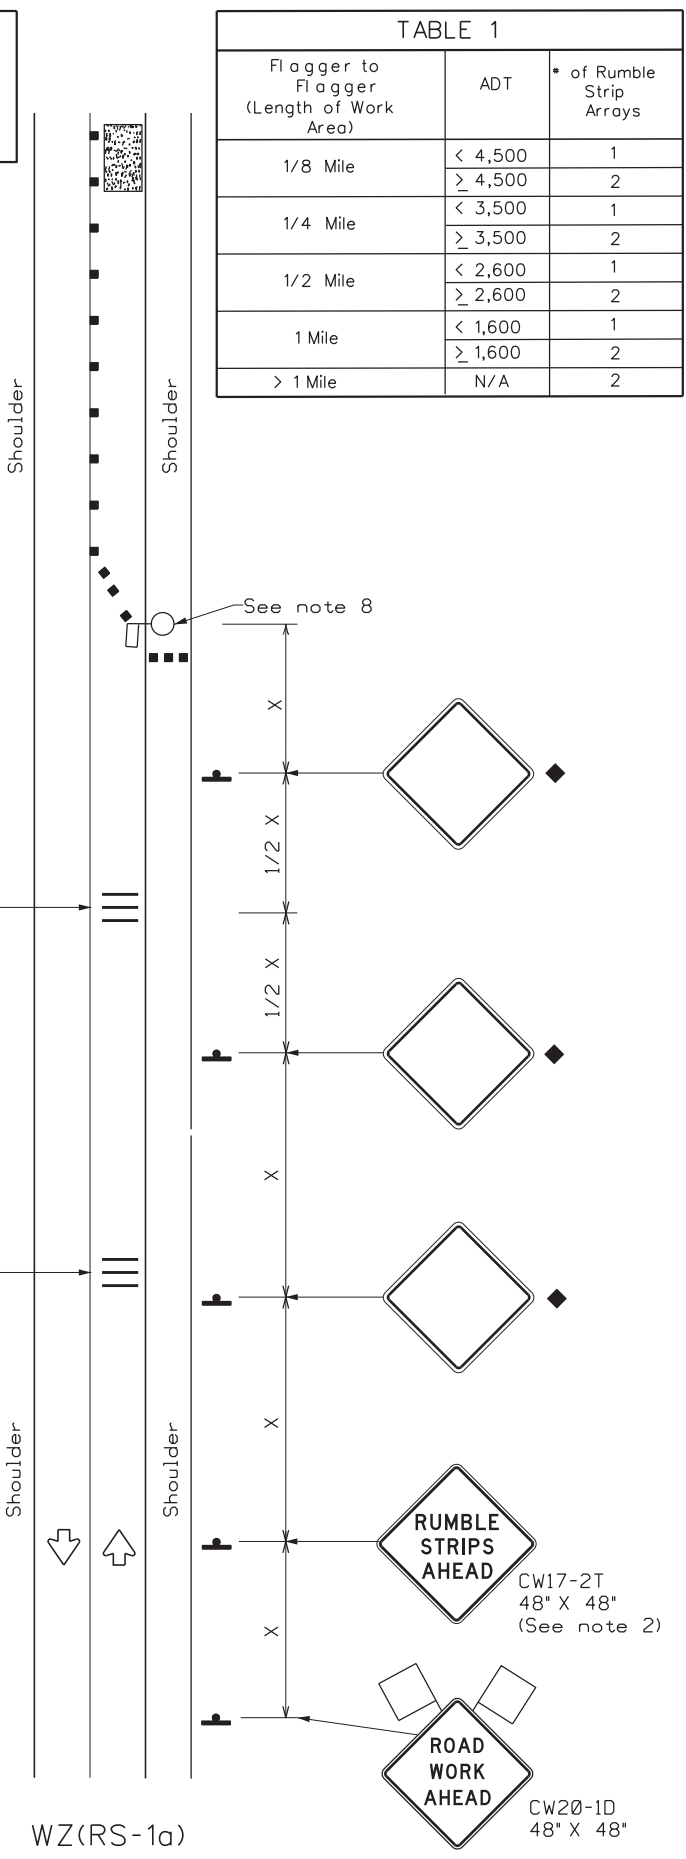

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

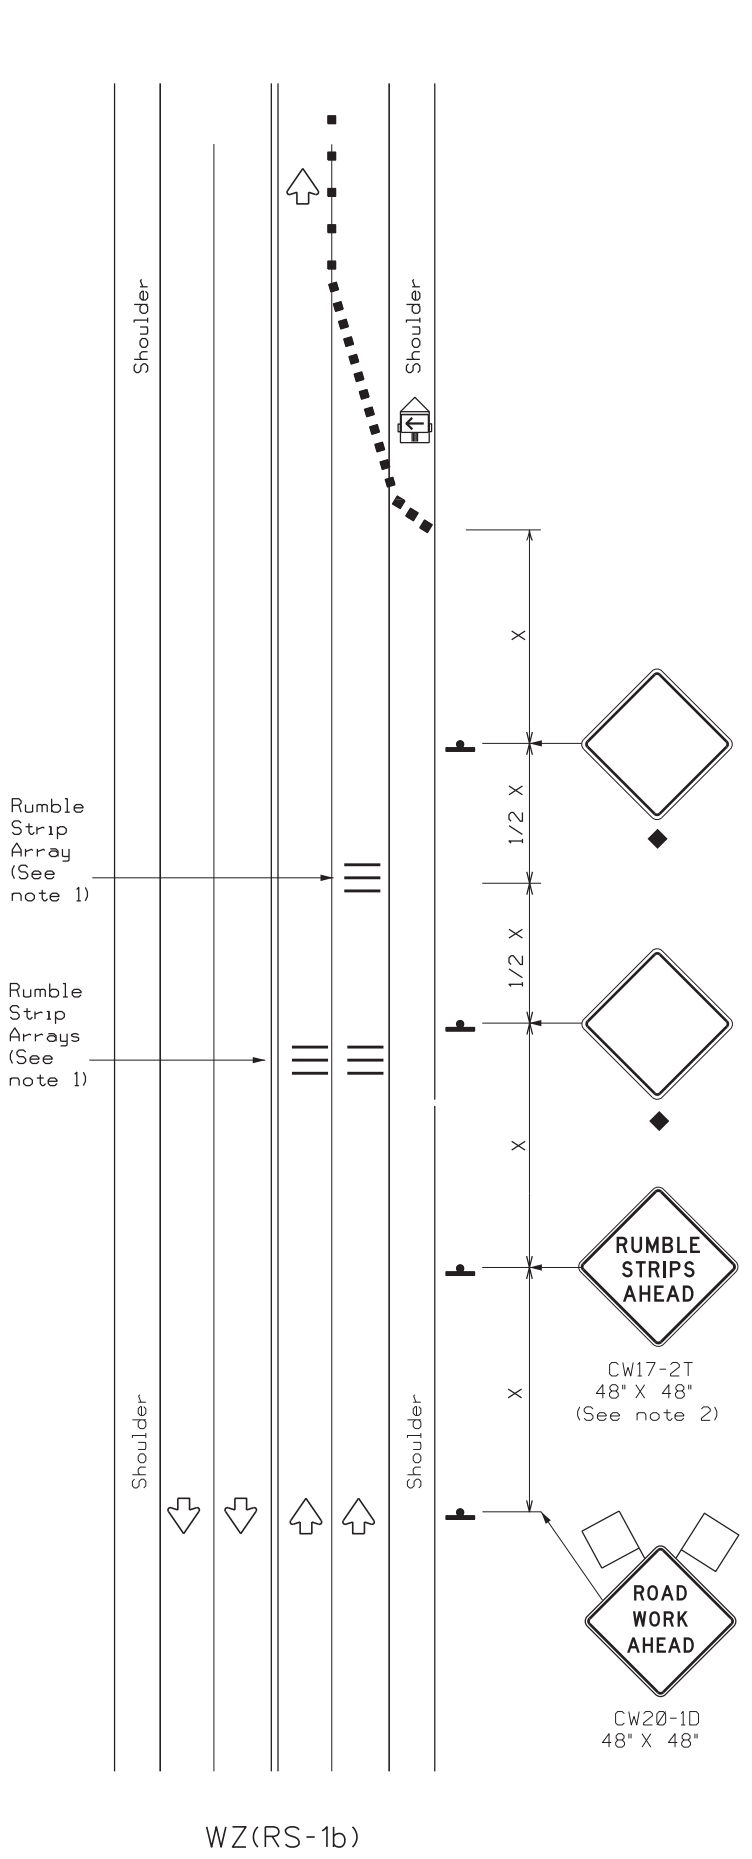

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35'+

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed * x	Formula L = WS <sup>2</sup> / 60	Minimum Desirable Taper Lengths * x			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

\* Conventional Roads Only  
 \* \* Taper lengths have been rounded off.  
 L=Length of Taper(FT) W=Width of Offset(FT)  
 S=Posted Speed(MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.

\* For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.


Texas Department of Transportation  
 Traffic Safety Division Standard

## TEMPORARY RUMBLE STRIPS

### WZ(RS)-22

FILE: wzs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2012	CONT: 6421	SECT: 35	JOB: 001	HIGHWAY: US 287, ETC.
REVISIONS				
2-14 1-22	DIST: WFS	COUNTY: MONTAGUE, ETC.	SHEET NO. 34	
4-16				


DATE: 12/20/2023 4:38:47 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001\_MBGF Cooke FY2024.4 - Design\Master\_Design\_File\MONTAGUE\_COUNTY.dgn

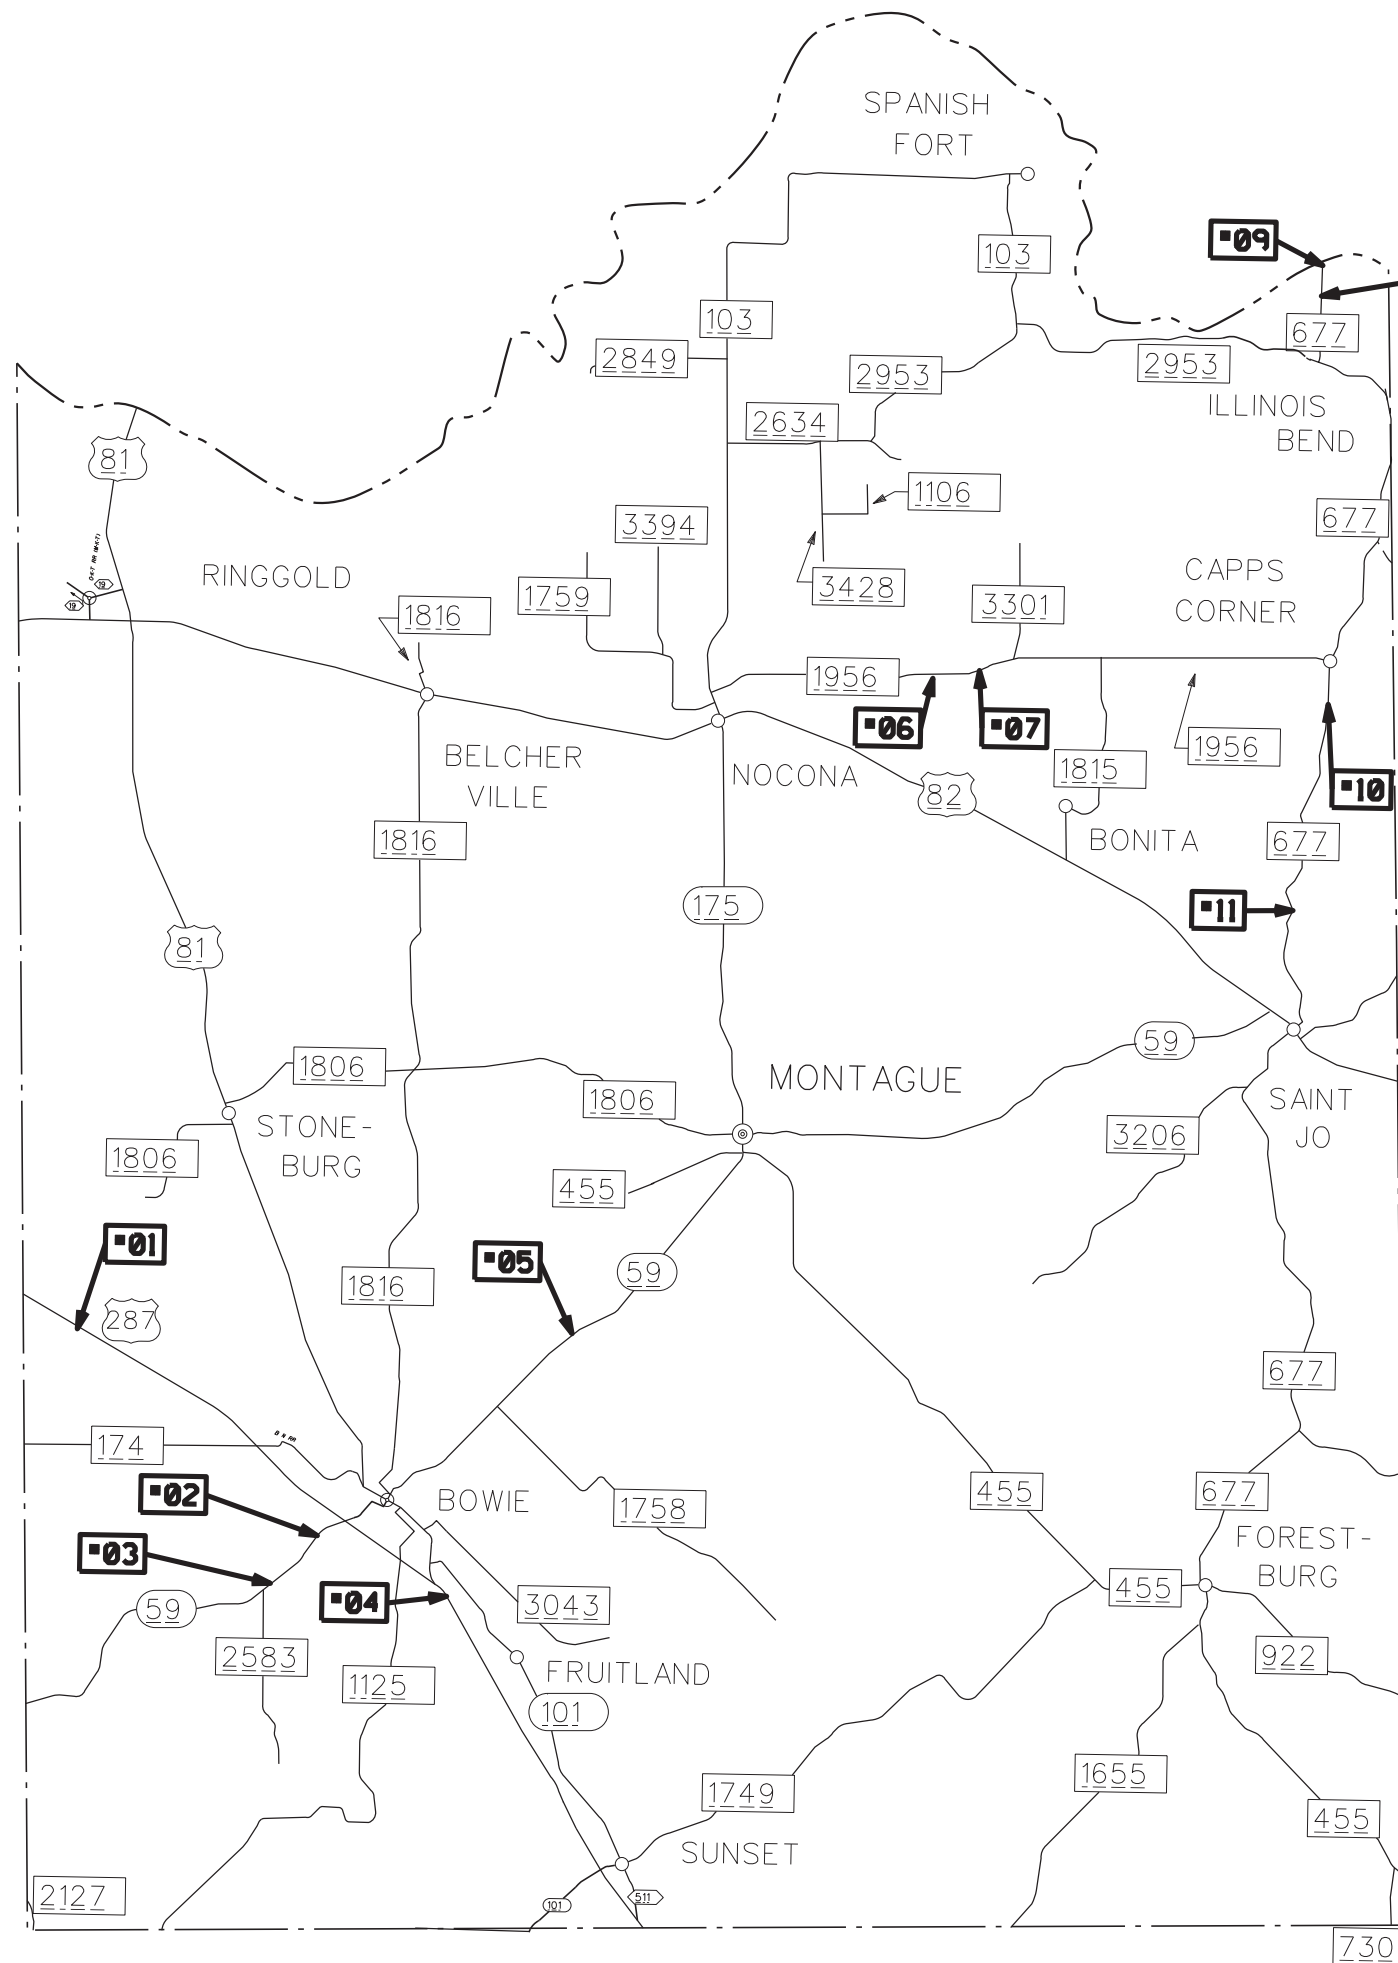

REFERENCE	COUNTY	ROADWAY	COORDINATES
1	MONTAGUE	NB US 287	33.615507, -97.970728
2	MONTAGUE	SH 59	33.549727, -97.872806
3	MONTAGUE	SH 59	33.534241, -97.891404
4	MONTAGUE	US 287 ACCESS	33.531449, -97.828891
5	MONTAGUE	SH 59	33.601609, -97.789930
6	MONTAGUE	FM 1956	33.799564, -97.653645
7	MONTAGUE	FM 1956	33.799496, -97.650499
8	MONTAGUE	FM 677	33.905401, -97.510296
9	MONTAGUE	FM 677	33.911053, -97.510211
10	MONTAGUE	FM 677	33.786191, -97.509357
11	MONTAGUE	FM 677	33.728698, -97.522633

REFERENCE  
 LAYOUT  
 MONTAGUE COUNTY

DATE: 12/20/2023 4:38:48 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBOF Cooke FY2024.4 - Design\Master\_Design\_File\COOKE COUNTY.dgn

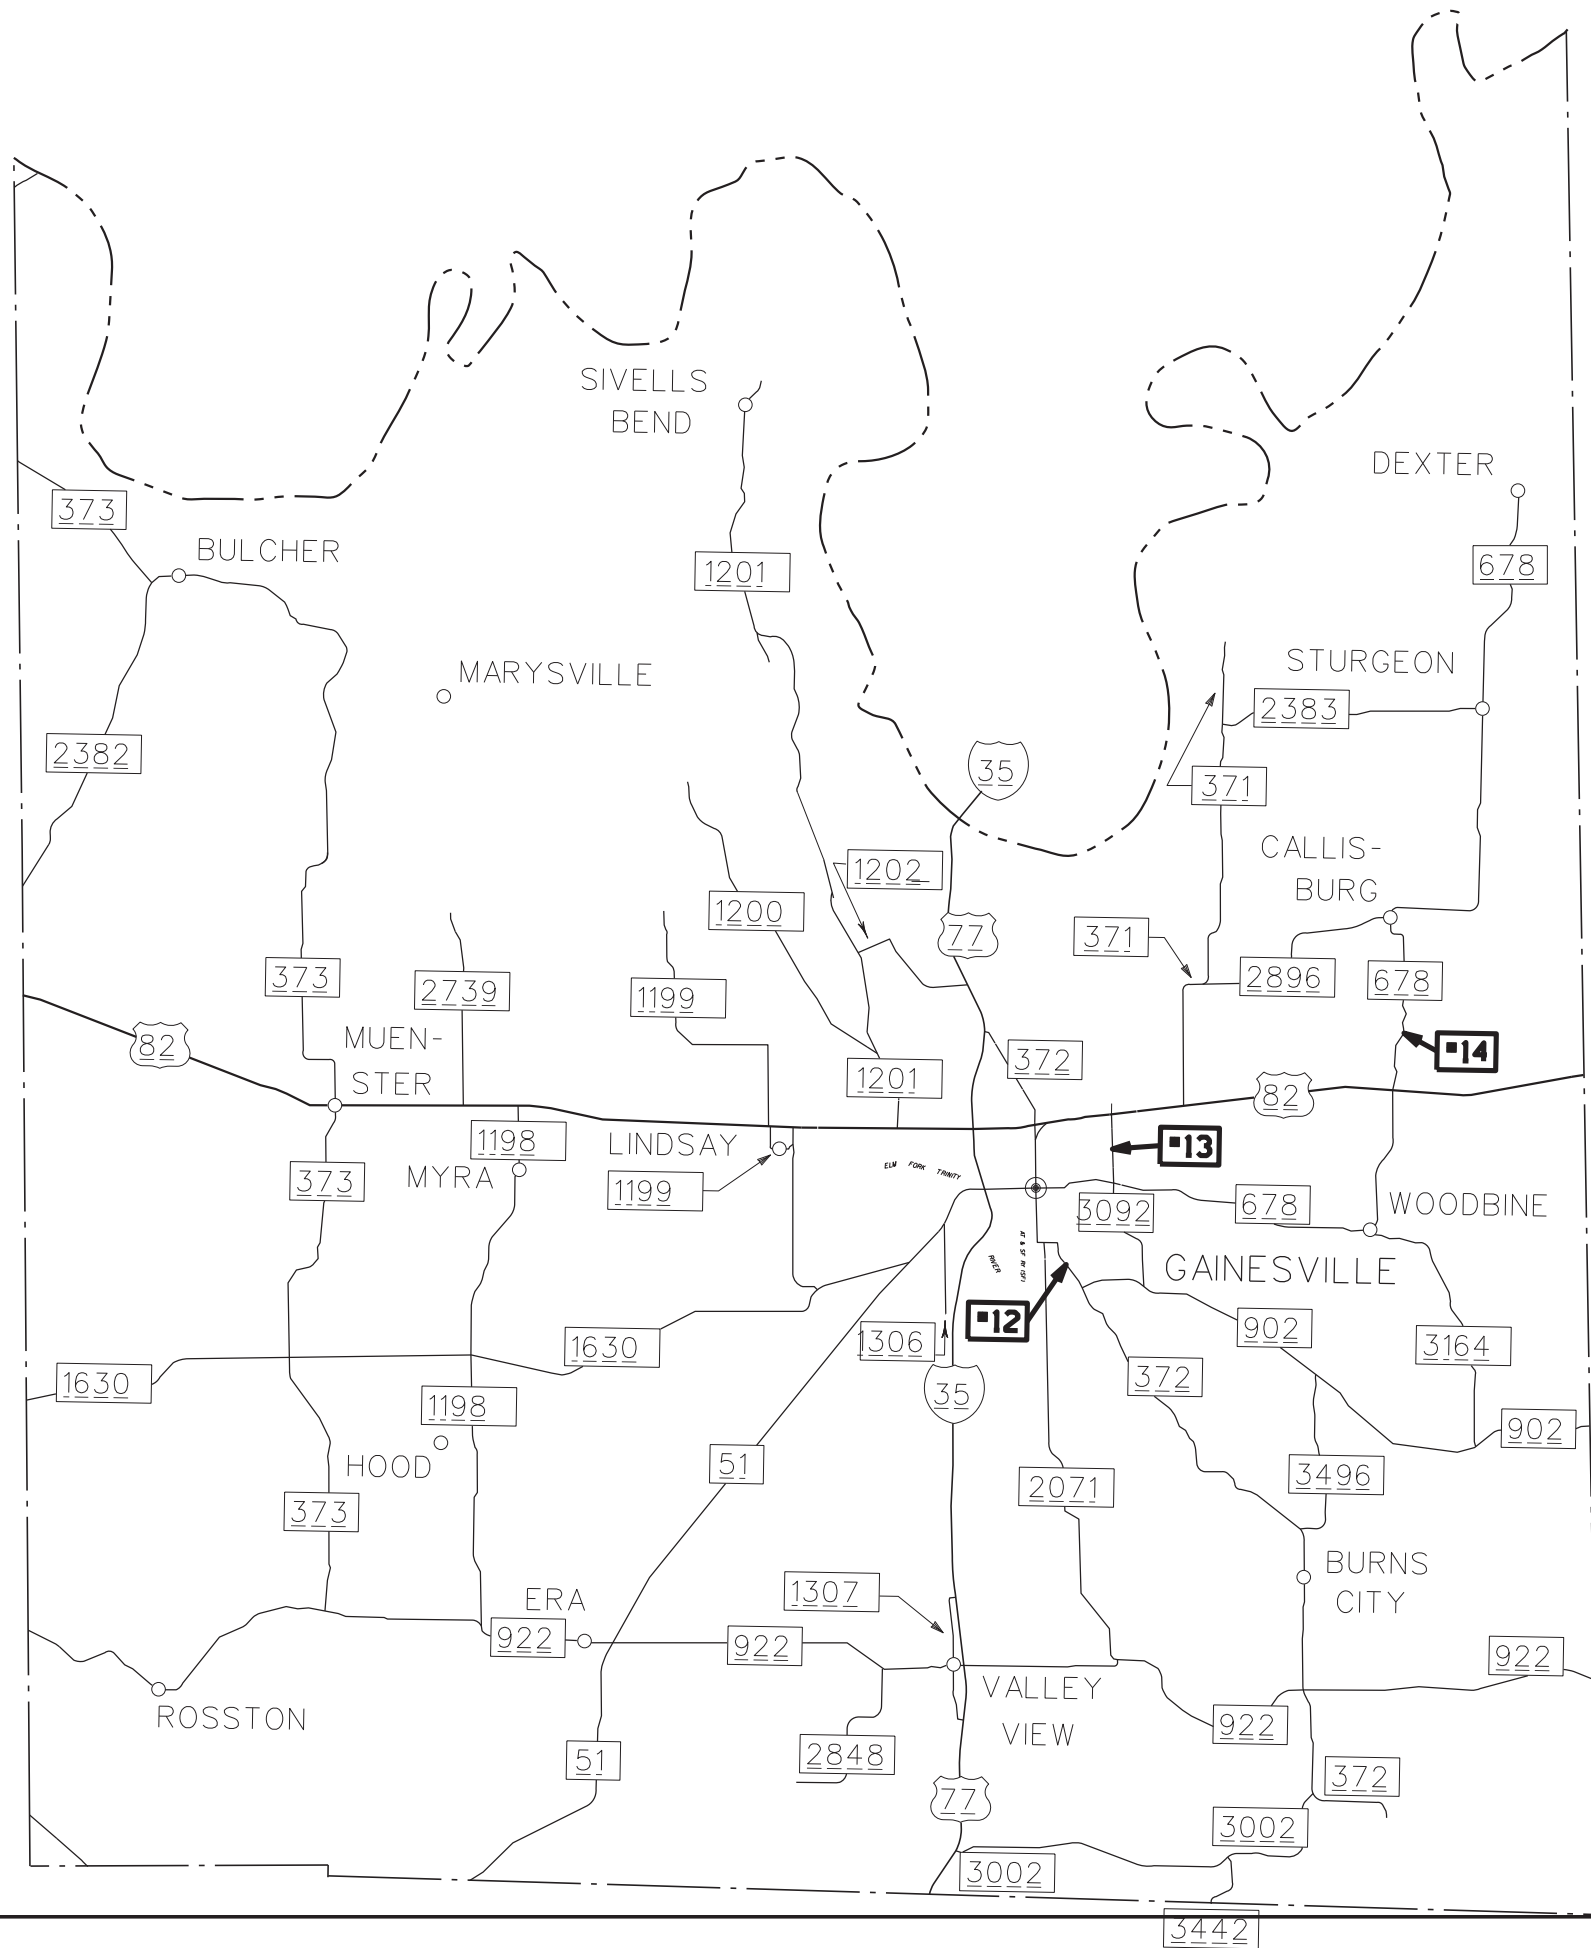

REFERENCE	COUNTY	ROADWAY	COORDINATES
12	COOKE	FM 372	33.602610, -97.123610
13	COOKE	FM 3092	33.637753, -97.106713
14	COOKE	FM 678	33.667674, -97.005036

REFERENCE  
 LAYOUT  
 COOKE COUNTY

2023  
 Texas Department of Transportation  
 SHEET 2 OF 2

CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	36	

DATE: 12/20/2023 4:38:49 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001\_MBGF Cooke FY2024\4 - Design\Master Design File\REFERENCE #01 DETAIL SHEET.dgn



Install 33.33 LF of Retrofit Rail (TY SSTR)


Install 1.00 EA Thrie-Beam  
Install 1.00 EA Guardrail End Treatment  
Install 125.00 LF of MBGF  
Install 10.00 CY of Rip-Rap (MOWSTRIP 4")

Install 100.00 LF of Retrofit Rail (TY SSTR)

Install 1.00 EA Thrie-Beam  
Install 1.00 EA Guardrail End Treatment  
Install 175.00 LF of MBGF  
Install 11.00 CY of Rip-Rap (MOWSTRIP 4")

NOTES:


1. Remove 315.00 LF of MBGF  
Remove 2.00 EA Guardrail End Treatment  
Remove 1.00 EA DAT  
Remove 1.00 EA TAS  
Remove 380.00 LF of Concrete (MOWSTRIP)
2. Refer to Retrofit SSTR Standard
3. Refer to MOWSTRIP Standard
4. Existing Rail is TY T1
5. The top of slab thickness is approximately 13"



*Michael D. Reynolds II, P.E.*  
12/21/2023

REFERENCE #01  
NB US 287  
33.615507, -97.970728

CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		37




Install 2.00 EA of Guardrail End Treatments  
Install 650.00 LF of MBGF

Install 2.00 EA of Guardrail End Treatments  
Install 650.00 LF of MBGF

NOTES:

1. Remove 4.00 EA of TAS  
Remove 1,400.00 LF of MBGF



*Michael D. Reynolds II*, P.E.  
12/21/2023


REFERENCE #02

SH 59  
33.549727, -97.872806



CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		38

DATE: 12/20/2023 4:38:57 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001\_MBGF Cooke FY2024.v4 - Design\Master\_Design\_File\REFERENCE #03 DETAIL SHEET.dgn



Install 1.00 EA of Anchor Plate  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 50.00 LF of MBGF

Install 1.00 EA of Anchor Plate  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 150.00 LF of MBGF




Install 1.00 EA of Anchor Plate  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 150.00 LF of MBGF

Install 1.00 EA of Anchor Plate  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 50.00 LF of MBGF

NOTES:

1. Remove 375.00 LF of MBGF  
Remove 4.00 EA of TAS's
2. Refer to T202 Anchor Plate Standard



*Michael D. Reynolds II, P.E.*


12/21/2023

REFERENCE #03  
SH 59  
33.534241, -97.891404




CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	39	

DATE: 12/20/2023 4:39:01 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.v4 - Design\Master Design File\REFERENCE #04 DETAIL SHEET.dgn




Install 2.00 EA of Anchor Plate  
Install 2.00 EA of Thrie-Beam  
Install 95.83 LF of MBGF

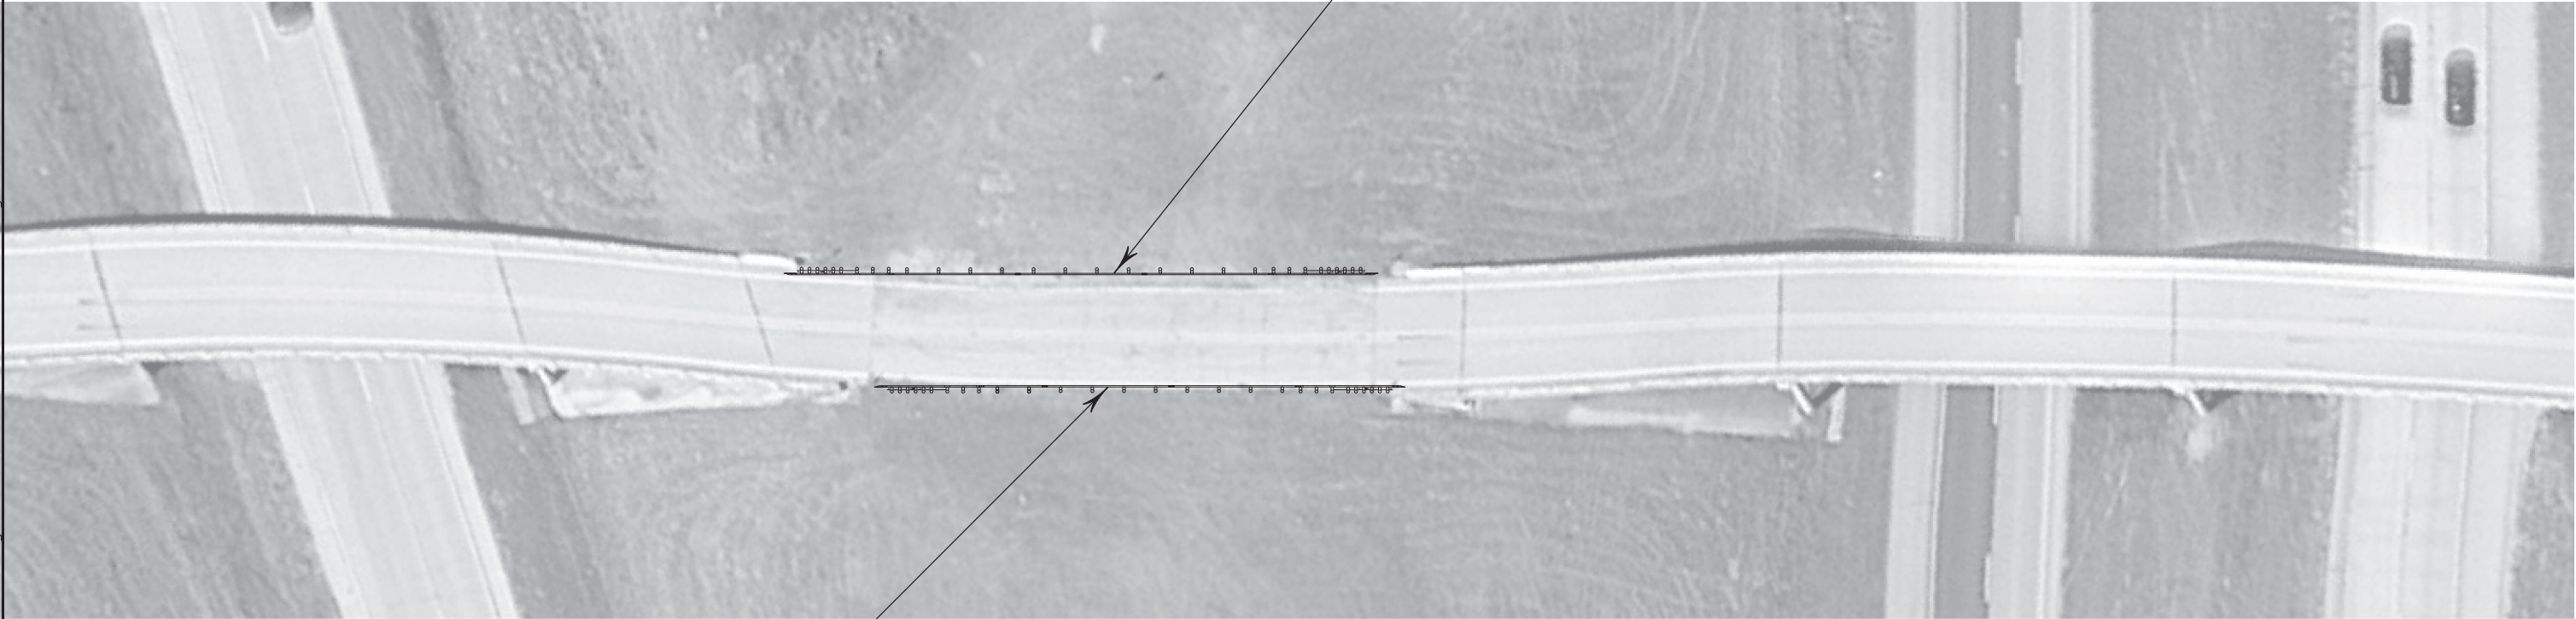

Install 2.00 EA of Anchor Plate  
Install 2.00 EA of Thrie-Beam  
Install 85.33 LF of MBGF

NOTES:

1. Refer to Anchor Plate Standard
2. Existing Rail (TY 4 MOD)



*Michael D. Reynolds II, P.E.*


12/21/2023

REFERENCE #04  
ACCESS RD US 287  
33.531449, -97.828891



CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	40	






Install 2.00 EA of Guardrail End Treatments  
 Install 16.50 CY of Rip-Rap (Mowstrip 4")  
 Install 175.00 LF of MBSG

Install 2.00 EA of Guardrail End Treatments  
 Install 19.00 CY of Rip-Rap Mowstrip  
 Install 175.00 LF of MBSG

NOTES:

1. Refer to the MOWSTRIP Standard.



*Michael D. Reynolds II, P.E.*

12/21/2023

REFERENCE #05

SH 59  
 33.601609, -97.789930




CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	41	



Install 1.00 EA of Guardrail End Treatment  
Install 125.00 LF of MBGF

Install 1.00 EA of Long Span

Install 1.00 EA of Guardrail End Treatment  
Install 225.00 LF of MBGF

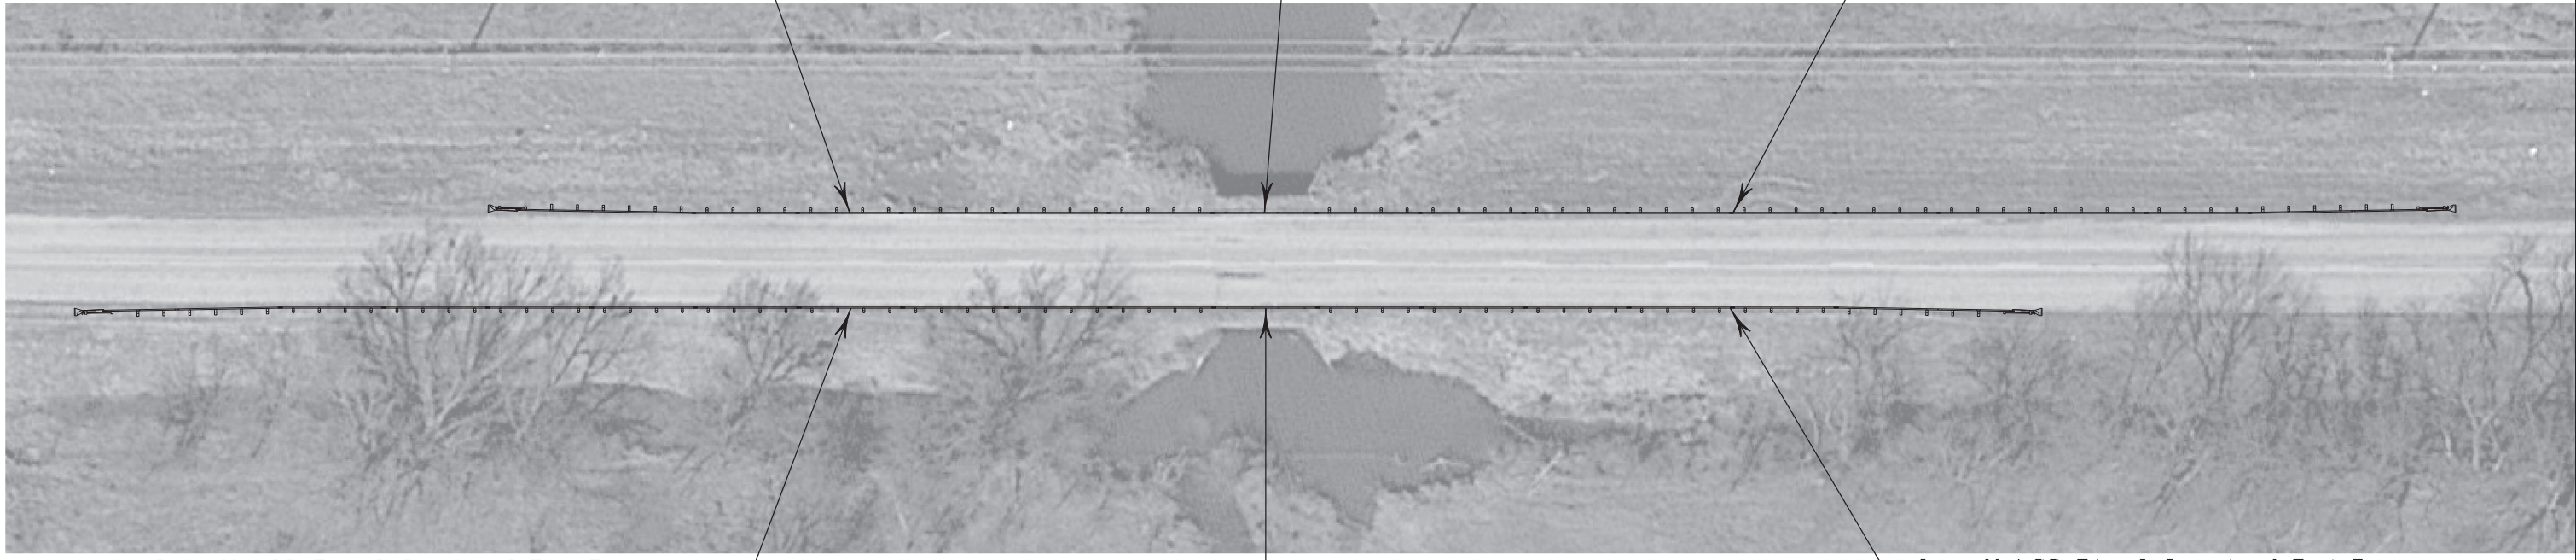


Install 1.00 EA of Guardrail End Treatment  
Install 225.00 LF of MBGF

Install 1.00 EA of Long Span

Install 1.00 EA of Guardrail End Treatment  
Install 125.00 LF of MBGF

NOTES:

- 1. Refer to Long Span Standard



*Michael D. Reynolds II, P.E.*

12/21/2023

REFERENCE #06  
FM 1956  
33.799564, -97.653645



CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		42

DATE: 12/20/2023 4:39:19 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024\4 - Design\Master\_Design File\REFERENCE #06 DETAIL SHEET.dgn



Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 100.00 LF of MBGF

Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 200.00 LF of MBGF




Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 100.00 LF of MBGF

Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 100.00 LF of MBGF

NOTES:

1. Remove 4.00 EA of TAS  
 Remove 375.00 LF of MBGF
2. Existing Rail (T502)



*Michael D. Reynolds II, P.E.*

12/21/2023


REFERENCE #07  
 FM 1956  
 33.799496, -97.650499



CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		43




Install 2.00 EA of Guard Rail End Treatments  
Install 1,300.00 LF of MBGF

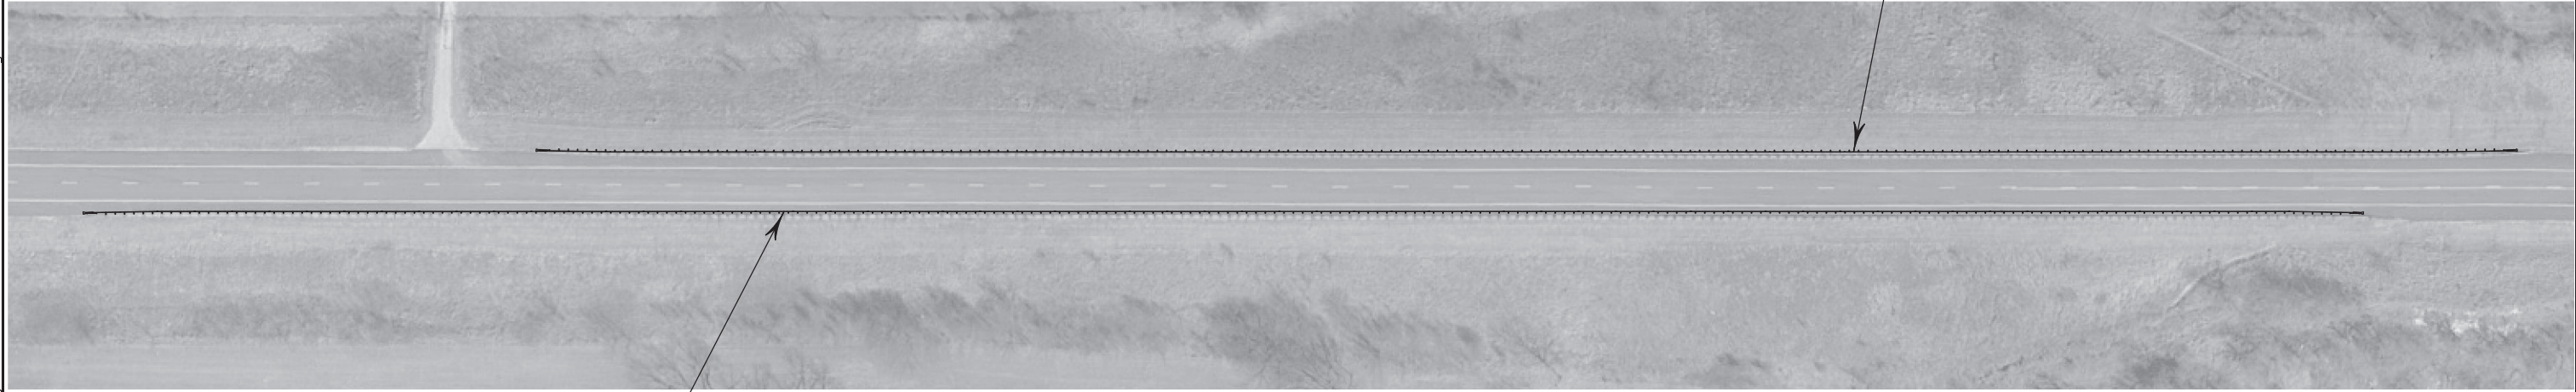

Install 2.00 EA of Guard Rail End Treatments  
Install 1,500.00 LF of MBGF

NOTES:

1. Remove 4.00 EA of TAS  
Remove 2,800.00 LF of MBGF



*Michael D. Reynolds II, P.E.*

12/21/2023

REFERENCE #08

FM 677  
33.905401, -97.510296




CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		44

DATE: 12/20/2023 4:39:27 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024\4 - Design\Master\_Design\_File\REFERENCE #08 DETAIL SHEET.dgn




Install 1.00 EA of T202 Retrofit Anchor Plate  
 Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 500.00 LF of MBSF

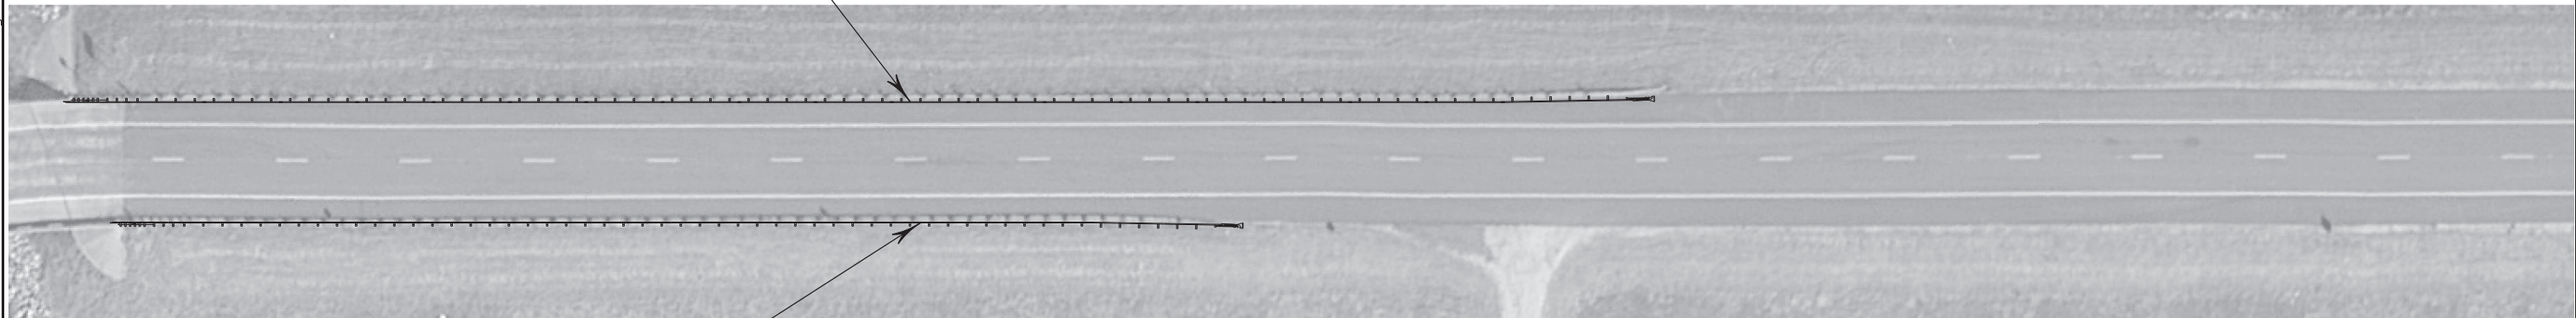

Install 1.00 EA of T202 Retrofit Anchor Plate  
 Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 300.00 LF of MBSF

NOTES:

1. Remove 2.00 EA of TAS  
Remove 840.00 LF of MBSF
2. Refer to T202 Anchor Plate Standard.



*Michael D. Reynolds II, P.E.*

12/21/2023

REFERENCE #09

FM 677  
33.911053, -97.510211




CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	45	

DATE: 12/20/2023 4:39:32 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBSF Cooke FY2024.v4 - Design\Master\_Design\_File\REFERENCE #09 DETAIL SHEET.dgn




Install 2.00 Guardrail End Treatments  
Install 225.00 LF of MBGF

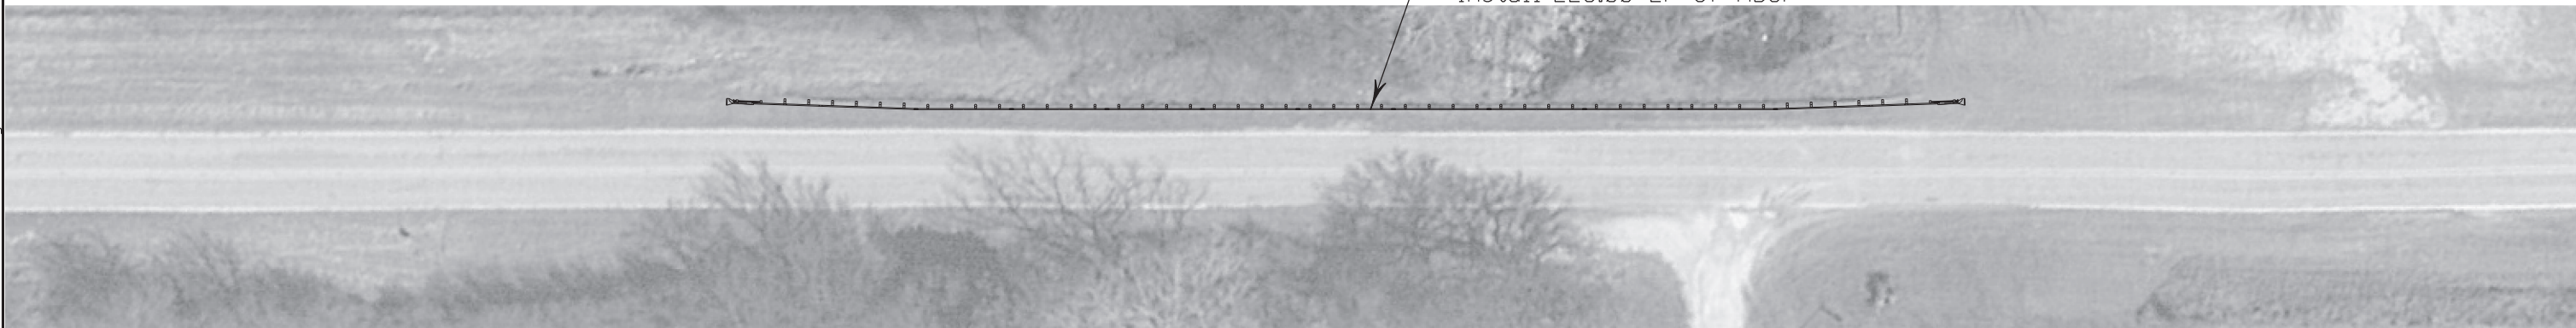

NOTES:

1. Remove 2.00 EA of TAS  
Remove 250.00 LF of MBGF



*Michael D. Reynolds II*, P.E.

12/21/2023


REFERENCE #10

FM 677  
33.786191, -97.509357




CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	46	

DATE: 12/20/2023 4:39:39 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024\4 - Design\Master\_Design File\REFERENCE #11\_DETAIL SHEET.dgn




Install 2.00 EA of Guardrail End Treatment  
Install 1,200.00 LF of MBGF

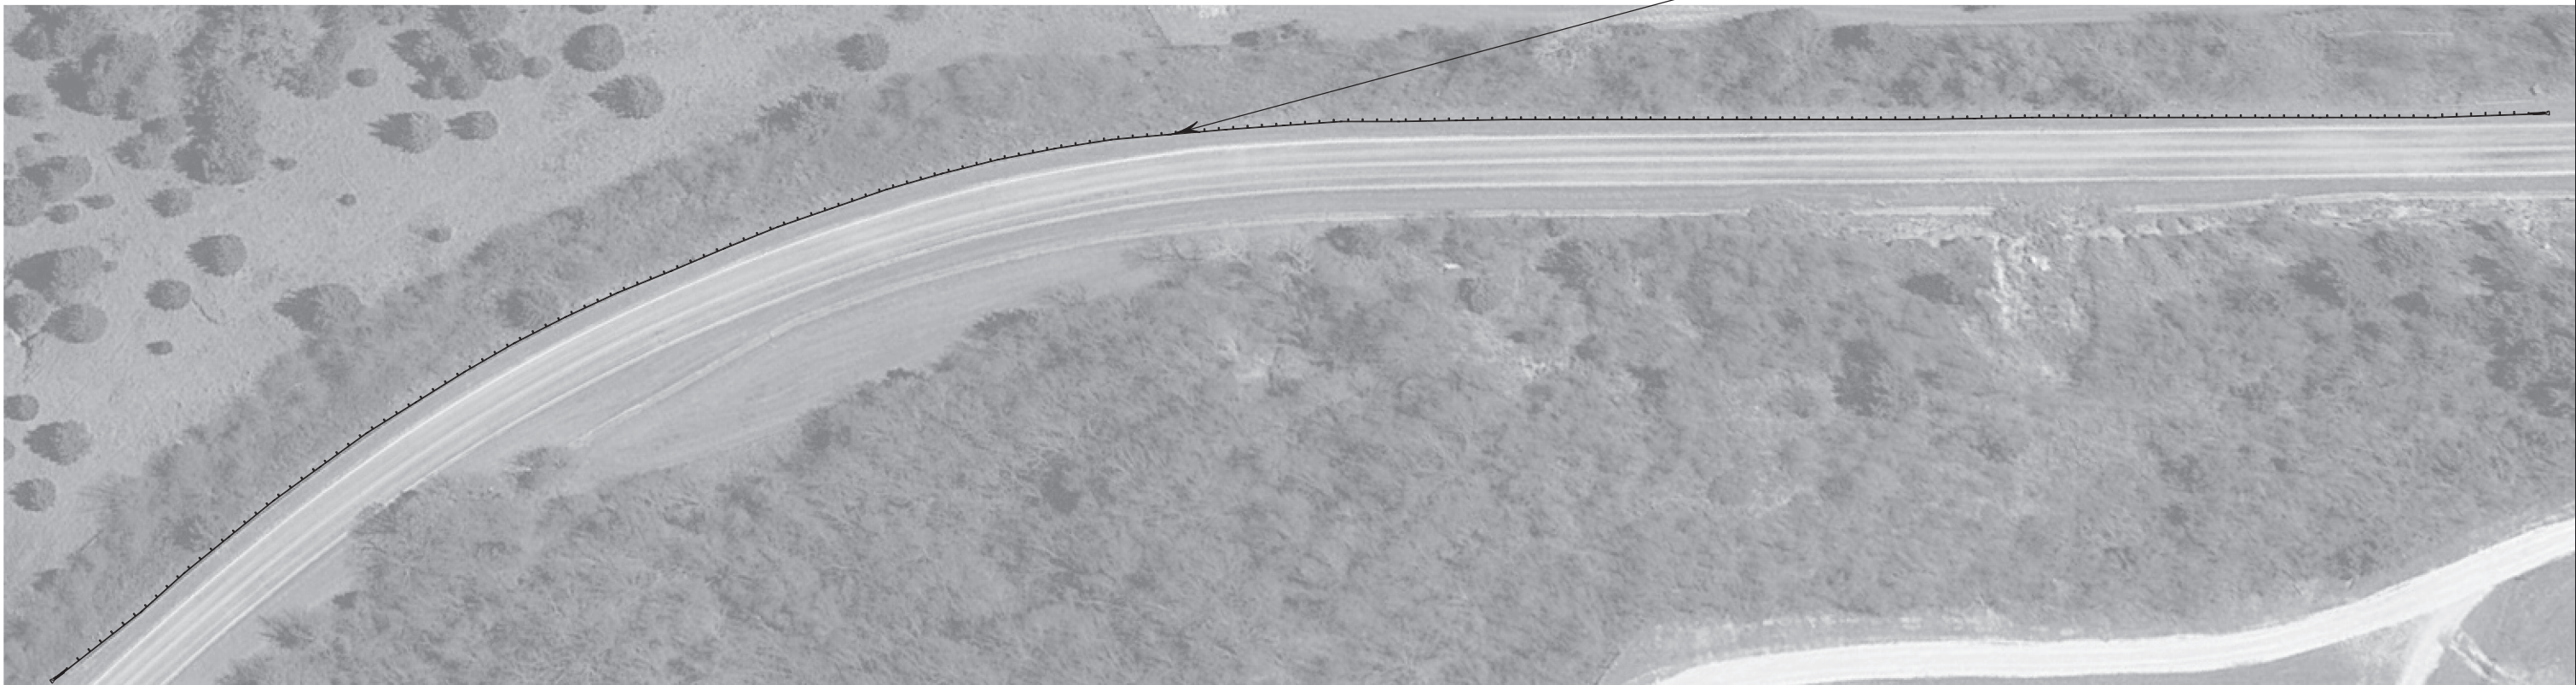

NOTES:

- 1. Remove 2.00 EA of TAS  
Remove 1,250.00 LF of MBGF





*Michael D. Reynolds II, P.E.*  
12/21/2023

REFERENCE #11  
FM 677  
33.728698, -97.522633

CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		47

DATE: 12/20/2023 4:39:43 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBSG Cooke FY2024\4 - Design\Master Design File\REFERENCE #12 DETAIL SHEET.dgn

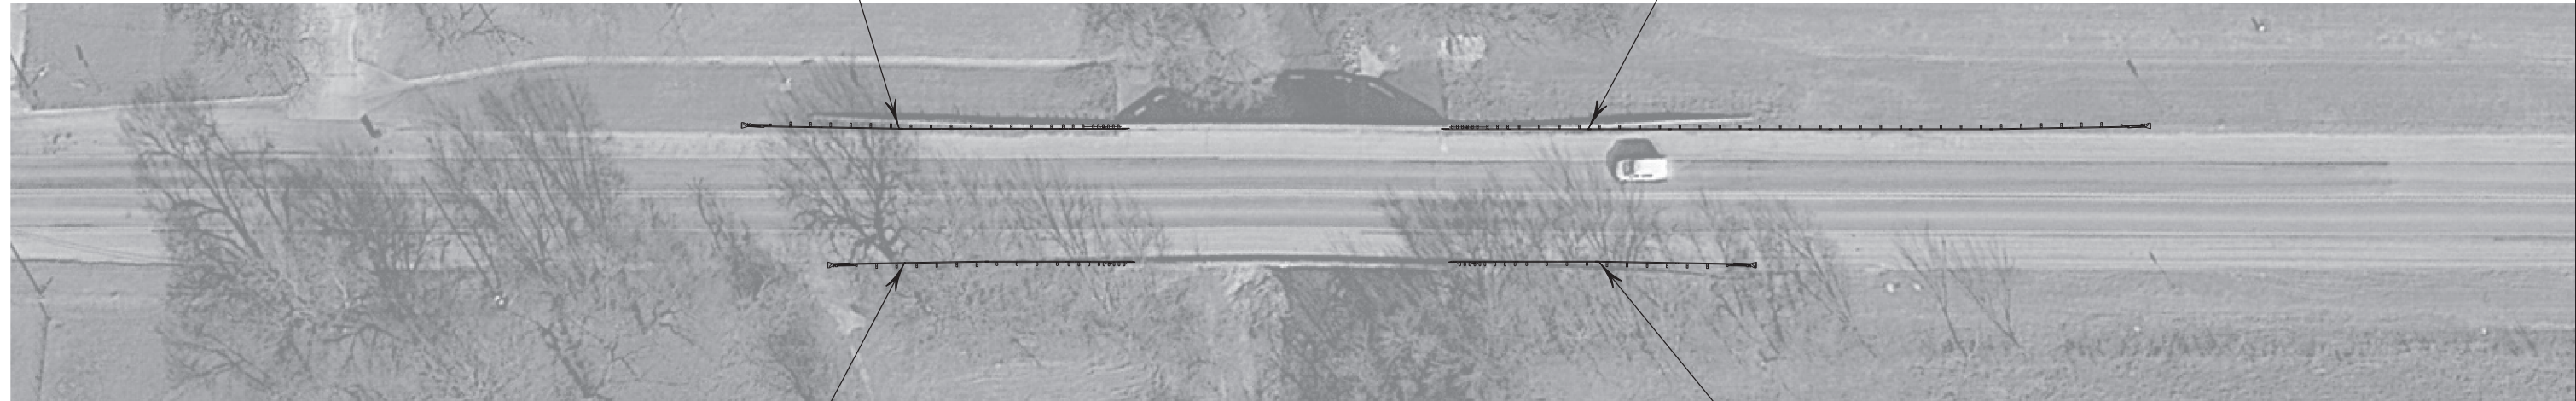

Install 1.00 EA of Anchor Plate Retrofit  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 50.00 LF of MBSG


Install 1.00 EA of Anchor Plate Retrofit  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 150.00 LF of MBSG

Install 1.00 EA of Anchor Plate Retrofit  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 25.00 LF of MBSG

Install 1.00 EA of Anchor Plate Retrofit  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 25.00 LF of MBSG

NOTES:

1. Remove 4.00 EA of TAS  
Remove 275.00 LF of MBSG
2. Refer to T202 Anchor Plate Standard



*Michael D. Reynolds II*, P.E.  
12/21/2023


REFERENCE #12  
FM 372  
33.602610, -97.123610



CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	48	




DATE: 12/20/2023 4:39:47 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBSG Cooke FY2024\4 - Design\Master\_Design\_File\REFERENCE #13 DETAIL SHEET.dgn



Install 1.00 EA of Anchor Plate  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 50.00 LF of MBSG

Install 1.00 EA of REACT M (NARROW) (MASH TL-3)

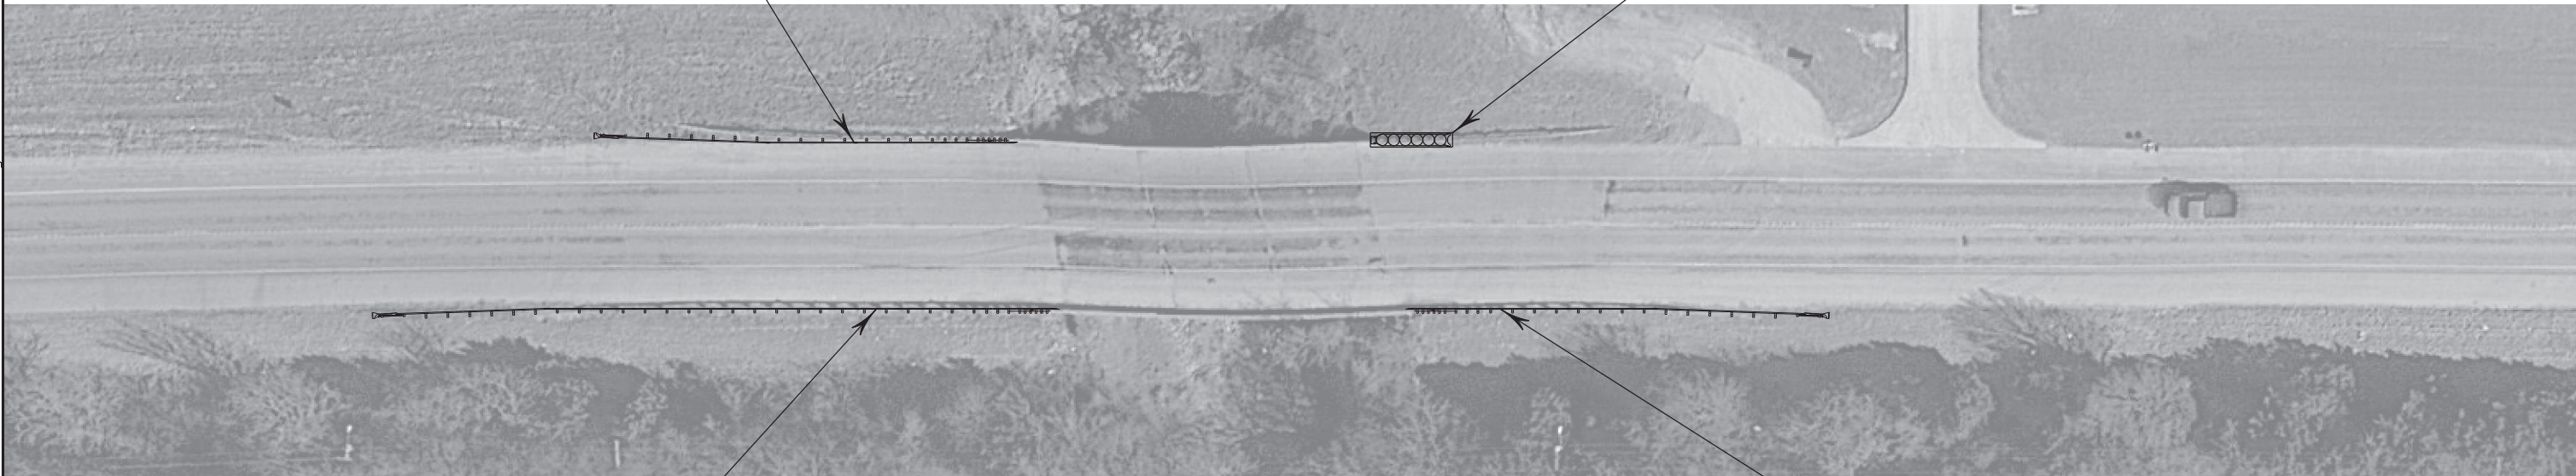


Install 1.00 EA of Anchor Plate  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 125.00 LF of MBSG

Install 1.00 EA of Anchor Plate  
Install 1.00 EA of Thrie-Beam  
Install 1.00 EA of Guardrail End Treatment  
Install 50.00 LF of MBSG

NOTES:

1. Remove 1.00 EA of Guardrail End Treatment  
Remove 3.00 EA of TAS  
Remove 175.00 LF of MBSG
2. Refer to T2 Retro Anchor Plate Standard



*Michael D. Reynolds II*, P.E.

12/21/2023

REFERENCE #13  
FM 3092  
33.637753, -97.106713




CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	49	



Install 1.00 EA of Anchor Plate  
 Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Driveway TAS  
 Install 25.00 LF of Short Radius  
 Install 12.50 LF of MBGF

Install 1.00 EA of Anchor Plate  
 Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 200.00 LF of MBGF

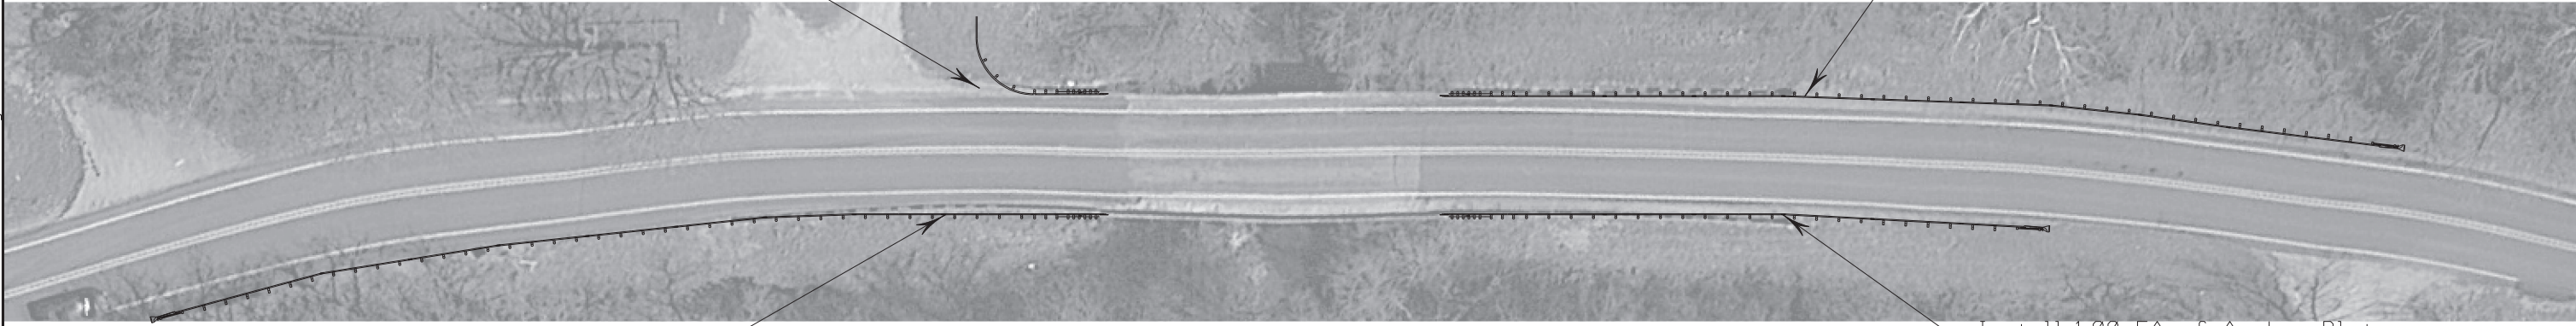


Install 1.00 EA of Anchor Plate  
 Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 200.00 LF of MBGF

Install 1.00 EA of Anchor Plate  
 Install 1.00 EA of Thrie-Beam  
 Install 1.00 EA of Guardrail End Treatment  
 Install 100.00 LF of MBGF

NOTES:

1. Remove 1.00 EA of TAS  
 Remove 3.00 EA of Guardrail End Treatment  
 Remove 165.00 LF of Rail
2. Refer to T202 Anchor Plate Detail
3. Refer to Driveway Short Radius Standard



*Michael D. Reynolds II, P.E.*

12/21/2023

REFERENCE #14




FM 678  
 33.667674, -97.005036





CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		50

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:39:55 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\BED-14.dgn

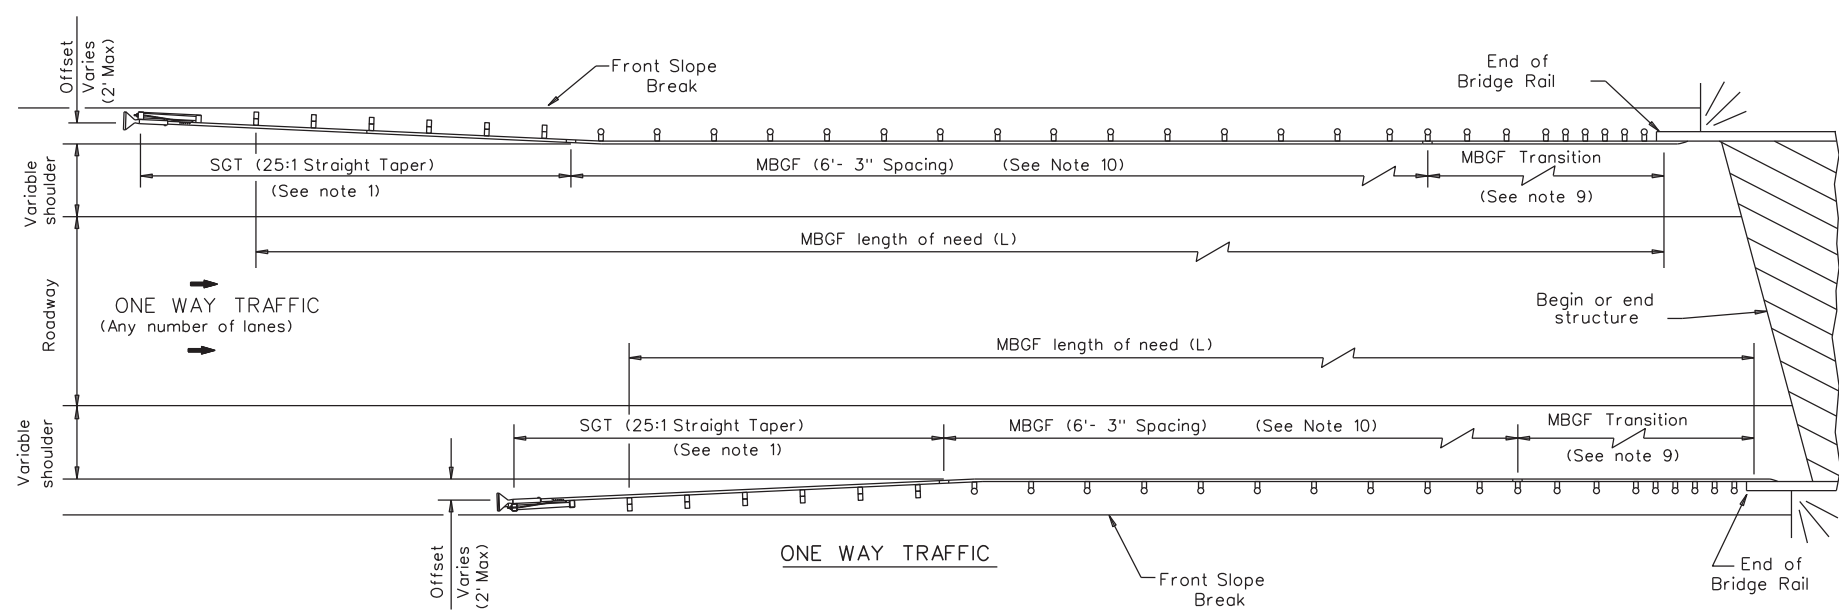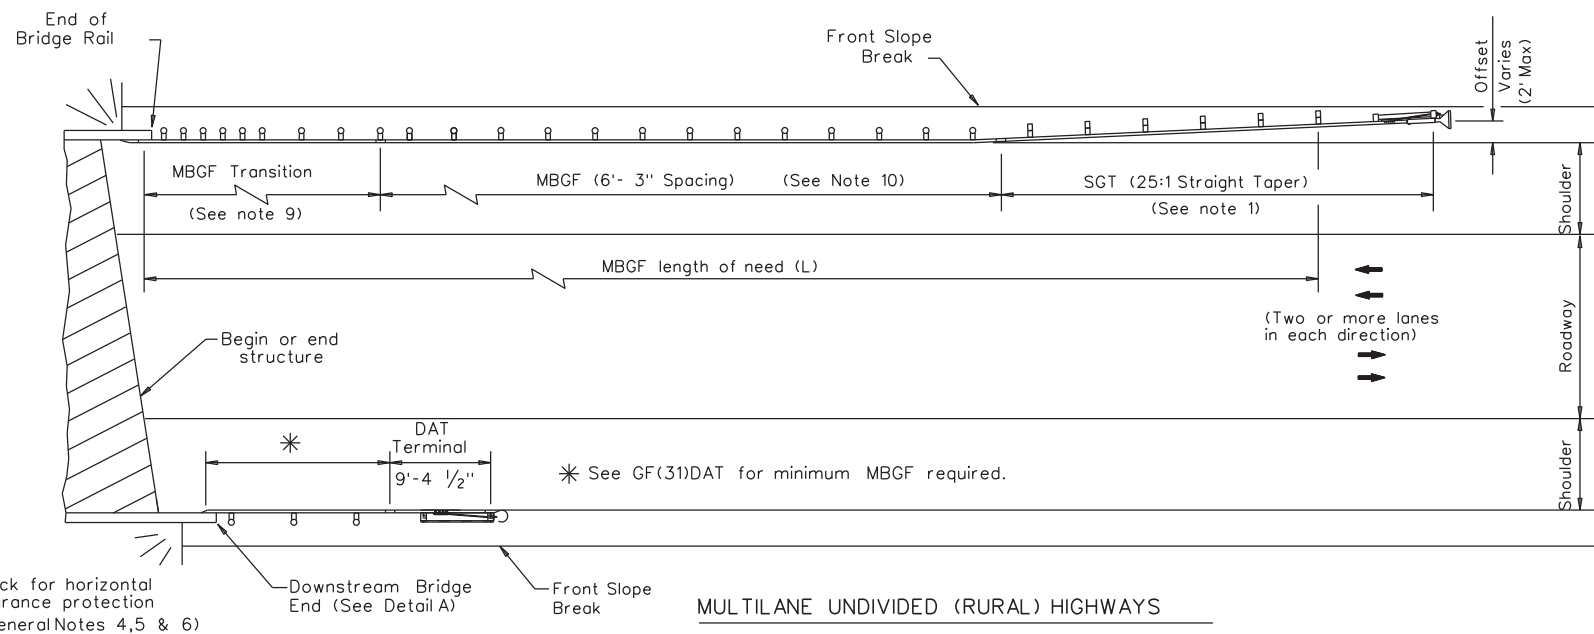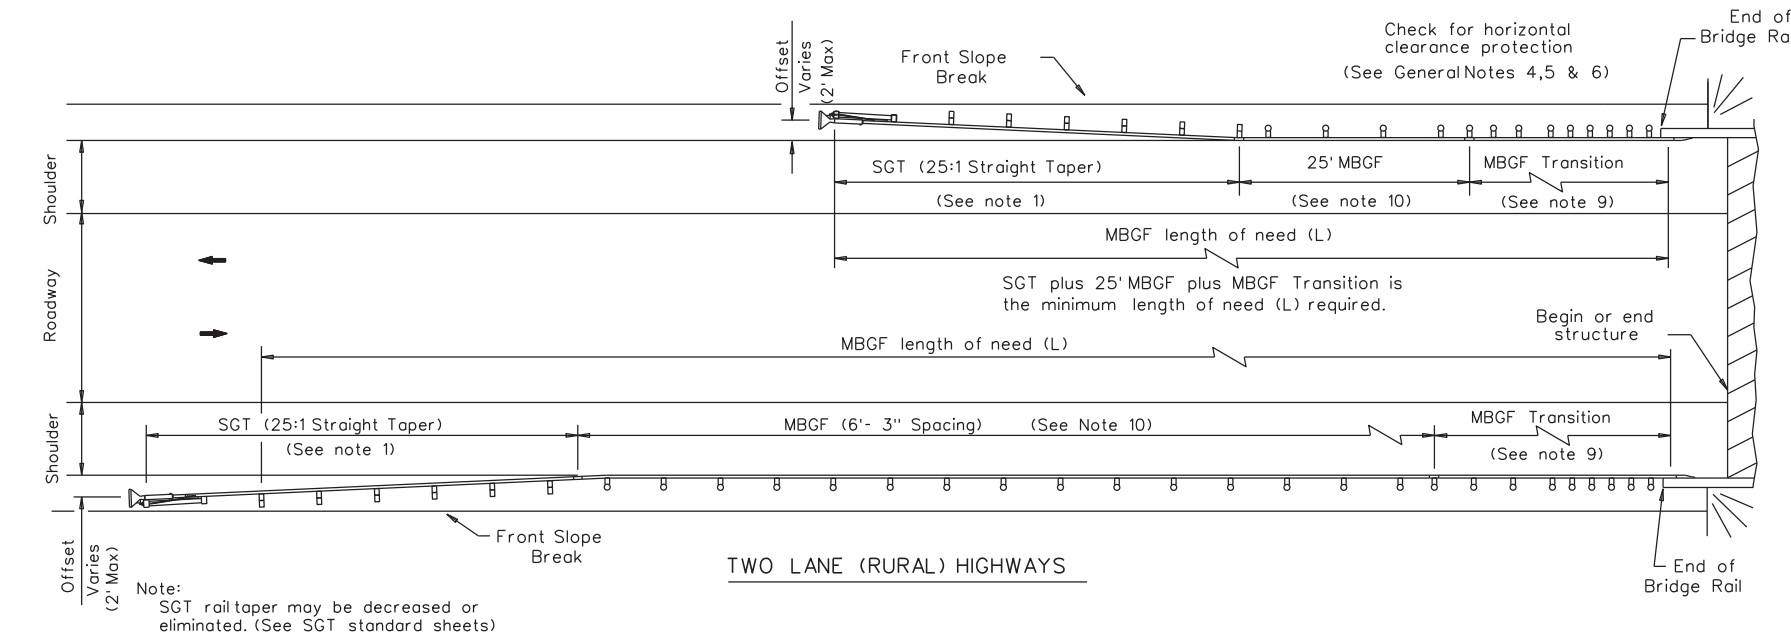

- GENERAL NOTES**
- For more detail: See GF(31), SGT (31), GF(31)TR, and GF(31)TL2 standard sheets.
  - Quantities of metal beam guard fence (MBGF) at individual bridge ends are as shown in the plans.
  - Use average daily traffic (ADT) for the current year to determine MBGF length of need in accordance with the Roadway Design Manual unless otherwise specified. Where significant traffic volume growth is anticipated on low volume (0-750 ADT) highways, use length determinations for the higher volume category.
  - MBGF may not be required to shield departure end of bridge unless other obstacles within the horizontal clearance limits or opposing traffic indicate a MBGF consideration.
  - Downstream anchor terminals (DAT) are only for downstream end anchorage use, outside the horizontal clearance area of opposing traffic.
  - Direct connection of MBGF to concrete rails are only for downstream rail connections outside the horizontal clearance area of opposing traffic. (This requires a minimum of three standard line posts plus the DAT terminal, See Detail A)
  - The crown shall be widened to accommodate MBGF. Typically the "front slope" break should be 2'- 0" from the back of the MBGF post. This applies to new construction on new alignment or where existing roadway cross section is to be widened to increase roadway width. This does not apply to rehabilitation work where existing roadway crown width is to be retained (See Typical Cross Section at MBGF).
  - For restrictive bridge widths: The MBGF should be properly transitioned from the existing bridge rail to the adjoining MBGF (See MBGF Transition Standards). Metal beam guard fence at these bridge location(s) shall be flared at the rate of 25:1 or flatter, and be of the length necessary to locate the terminal end at the 2 ft. "maximum" offset from the shoulder edge in the approach direction.
  - Transition length and post spacing will vary depending on the transition type. Transition type will be shown elsewhere in the plans.
  - A minimum 25' length of MBGF will be required.

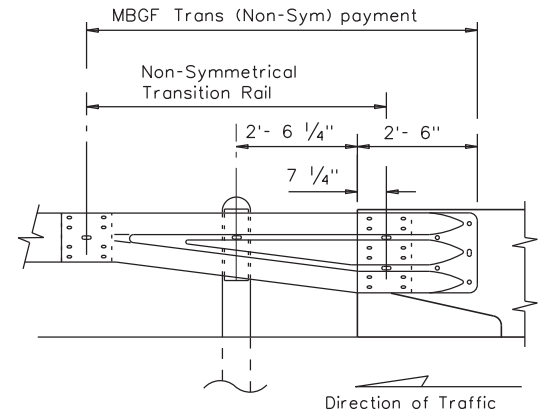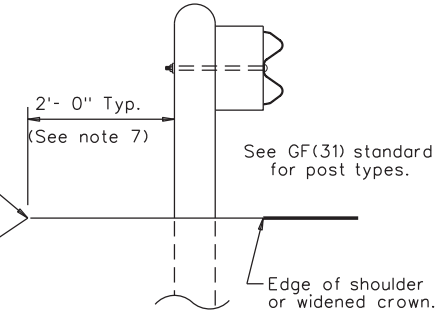


Note: All rail elements shall be lapped in the direction of adjacent traffic.


		<b>Design Division Standard</b>	
<b>BRIDGE END DETAILS</b> (METAL BEAM GUARD FENCE APPLICATIONS TO RIGID RAILS)			
<b>BED-14</b>			
FILE: bed14.dgn	DN: TxDOT	CK: AM	DW: BD/VP
© TxDOT: December 2011	CONT: 6421	SECT: 35	JOB: 001
REVISIONS	US 287, ETC.		SHEET NO.
DIST: WFS	COUNTY: MONTAGUE, ETC.	51	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information resulting from its use.


DATE: 12/20/2023 4:39:55 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001\_MBGCF\_Cooke\_FY2024.4 - Design\WFSMAINT\6421-35-001\_MBGCF\_Cooke\_FY2024.4.dgn

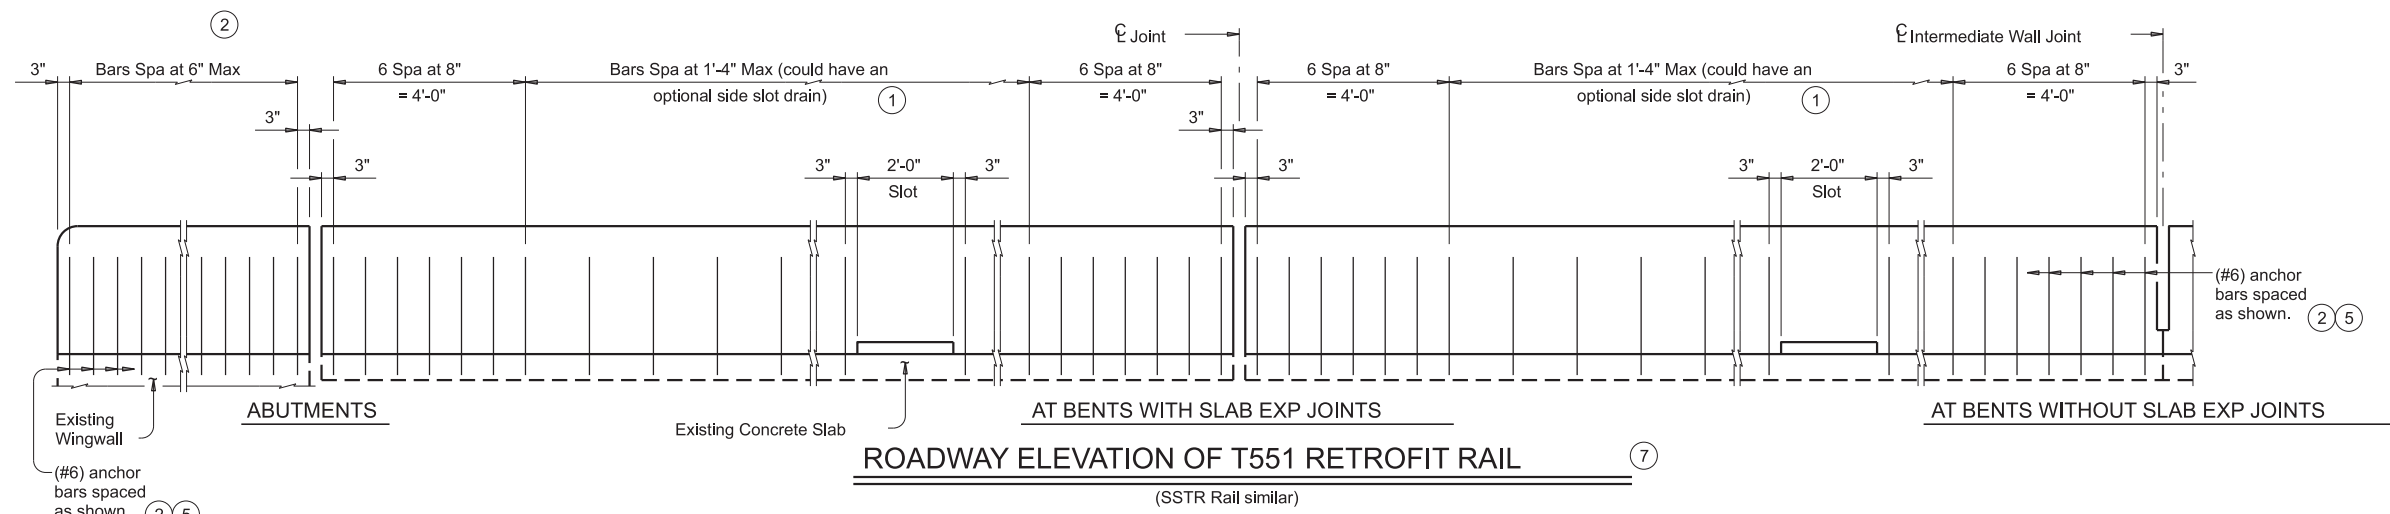

- ① When side slot drains are used, provide 8'-0" Min clear spacing between drain slots.
- ② Embed (#6) anchor bars 5 1/4" with Hilti HIT RE500 epoxy adhesive. Other Type III Class C, D, E, or F epoxy adhesives meeting the requirements of DMS-6100, "Epoxy and Adhesives", may be used if it can be demonstrated that they meet or exceed the strength of Hilti HIT RE500 with the same embedment depth and anchor bar size and spacing. Follow Manufacturer's directions for installing the epoxied anchor bars.
- ⑤ See T551 or SSTR Rail Sections in "Retrofit Rail Section on Wingwalls using Epoxy Anchor Bars" and/or "Retrofit Rail Section on Concrete Slabs using Epoxy Anchor Bars".
- ⑦ Showing spacing of (#6) anchor bar epoxy anchored in a retrofitted rail condition. Secondary (#4) anchor bar epoxy anchored in retrofitted rail not shown for clarity. Reinforcing steel and terminal connections not shown for clarity. See appropriate rail standard for details and notes not shown.

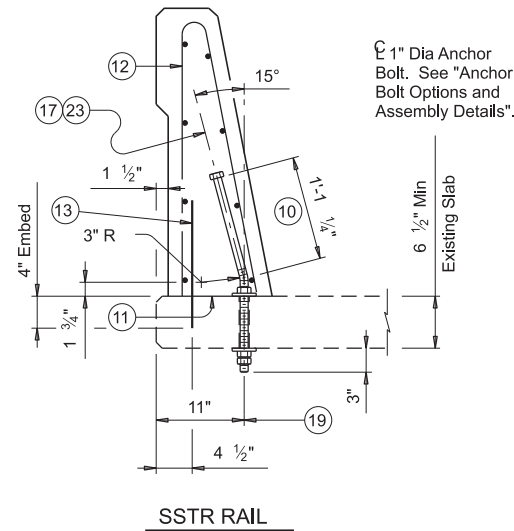


**RETROFIT RAIL SECTIONS ON SLABS USING ANCHOR BOLTS** ⑩

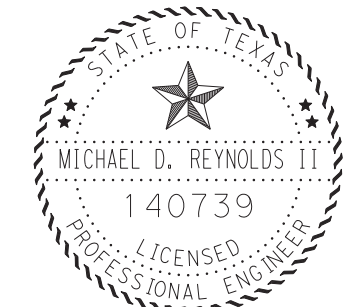


*Michael D. Reynolds II, P.E.*  
 12/21/2023

- ⑩ Increase by amount of existing overlay/seal coat thickness, not to exceed 2". If thickness of existing overlay/seal coat is greater than 2" at toe of rail, taper overlay at a 1:10 or flatter slope over shoulder width to a thickness of 2" or less at toe of rail.
- ⑪ Do not cast rails or parapet walls on top of overlays/seal coats.
- ⑫ See appropriate rail standard for reinforcing steel. Modify length of vertical reinforcing bars as required to fit existing structure. Longitudinal reinforcing bars may be removed only if their position puts them in conflict with un-removed portions of existing structure.
- ⑬ Secondary (#4) anchor bars 1'-4" in length are embedded 4" with a Type III Class C, D, E, or F epoxy anchorage system. Follow Manufacturer's directions for installing the epoxied anchor bars. (#4) anchor bars spaced longitudinally along rail at 4 ft Max (Spaced 3" longitudinally from outside edge and edge of side slot drains).
- ⑰ 1" Dia Anchor Bolt Spaced longitudinally along rail at 24" Max (Spaced 6" longitudinally from outside edge and edge of optional side slot drains, if required).
- ⑲ 1 1/16" to 1 1/4" Dia holes. Core drill holes through existing deck (percussion drilling not permitted). Concrete spalls in the bottom of the deck exceeding 1/2" from edge of holes will be patched in accordance with Item 429, "Concrete Structure Repair" at the Contractor's expense.
- ⑳ 1" Dia ASTM-F1554 Grade 55 Anchor Bolt or Threaded Rod.
- ㉑ Plate Washer 3/8 x 3 x 3 ASTM-A36 with 1 1/16" Dia Hole centered.
- ㉒ Galvanize anchor bolts, nuts and plate washers.
- ㉓ See "Bar RD(#8) Assembly Detail".
- ㉔ Tape ends of 1 1/4" PVC pipe Sch 80 to prevent concrete or mortar from seeping in.

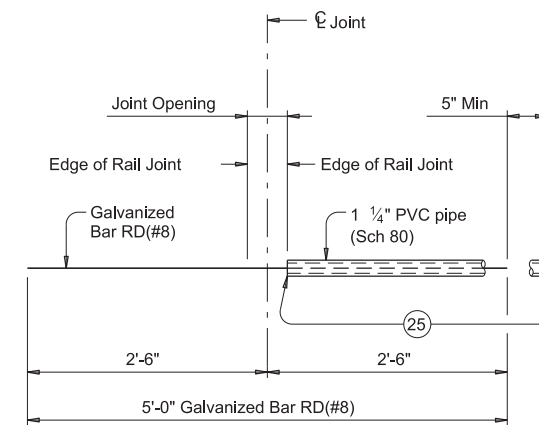

**BAR RD(#8) ASSEMBLY DETAIL**

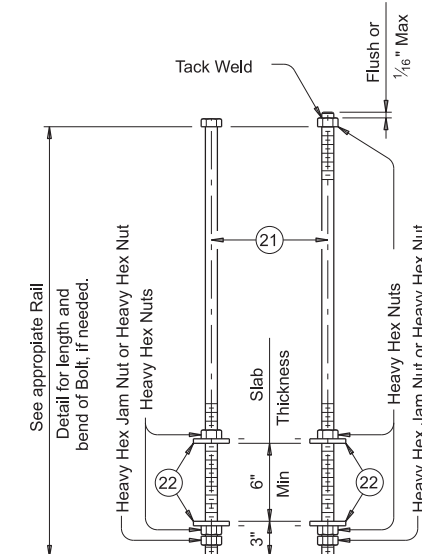

**ANCHOR BOLT OPTIONS AND ASSEMBLY DETAILS** ㉓


SHEET 1 OF 2

		<b>Bridge Division Standard</b>	
<b>RETROFIT GUIDE FOR CONCRETE RAILS</b> <b>SSTR C-RAIL-R (MOD)</b>			
FILE: rstds22.dgn	DN: TxDOT	CK: TxDOT	DW: JTR
REVISIONS	CONT	SECT	JOB
03-16: Added additional epoxy classes.	6421	35	001
	DIST	COUNTY	SHEET NO.
	WFS	MONTAGUE, ETC.	52


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for any errors or omissions resulting from its use.

DATE: 12/20/2023 4:39:56 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001.MBGF Cooke FY2024.4 - Design


- ② Embed (#6) anchor bars 5 1/4" with Hilti HIT RE500 epoxy adhesive. Other Type III Class C, D, E, or F epoxy adhesives meeting the requirements of DMS-6100, "Epoxyes and Adhesives", may be used if it can be demonstrated that they meet or exceed the strength of Hilti HIT RE500 with the same embedment depth and anchor bar size and spacing. Follow Manufacturer's directions for installing the epoxied anchor bars.
- ⑨ Showing location or locations of anchor bars in a retrofitted rail condition. See appropriate rail standard for details and notes not shown.
- ⑩ Increase by amount of existing overlay/seal coat thickness, not to exceed 2". If thickness of existing overlay/seal coat is greater than 2" at toe of rail, taper overlay at a 1:10 or flatter slope over shoulder width to a thickness of 2" or less at toe of rail.
- ⑪ Do not cast rails or parapet walls on top of overlays/seal coats.
- ⑫ See appropriate rail standard for reinforcing steel. Modify length of vertical reinforcing bars as required to fit existing structure. Longitudinal reinforcing bars may be removed only if their position puts them in conflict with un-removed portions of existing structure.
- ⑬ Secondary (#4) anchor bars 1'-4" in length are embedded 4" with a Type III Class C, D, E, or F epoxy anchorage system. Follow Manufacturer's directions for installing the epoxied anchor bars. (#4) anchor bars spaced longitudinally along rail at 4 ft Max (Spaced 3" longitudinally from outside edge and edge of side slot drains).




ANCHOR BAR EA1 (#6)




ANCHOR BAR EA2 (#6)



ANCHOR BAR EA3 (#6)

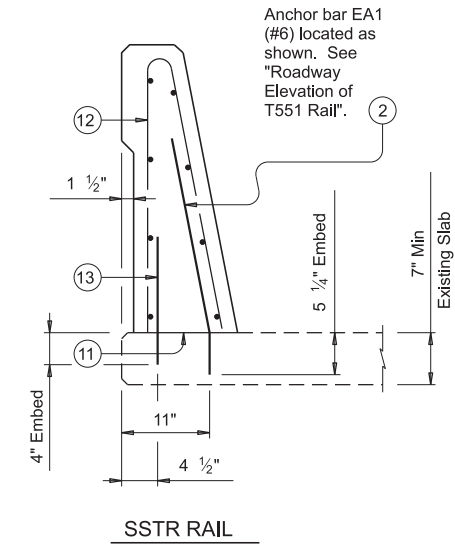

⑨ RETROFIT RAIL SECTIONS ON CONCRETE SLABS USING EPOXY ANCHOR BARS



*Michael D. Reynolds II, P.E.*

12/21/2023

SHEET 2 OF 2




RETROFIT GUIDE FOR CONCRETE RAILS  
 SSTR  
 C-RAIL-R (MOD)


FILE: rstds22.dgn	DN: TxDOT	CK: TxDOT	DW: JTR	CK: JMH
©TxDOT July 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
03-16: Added additional epoxy classes.	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	53	

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\GF(31)-19.dgn

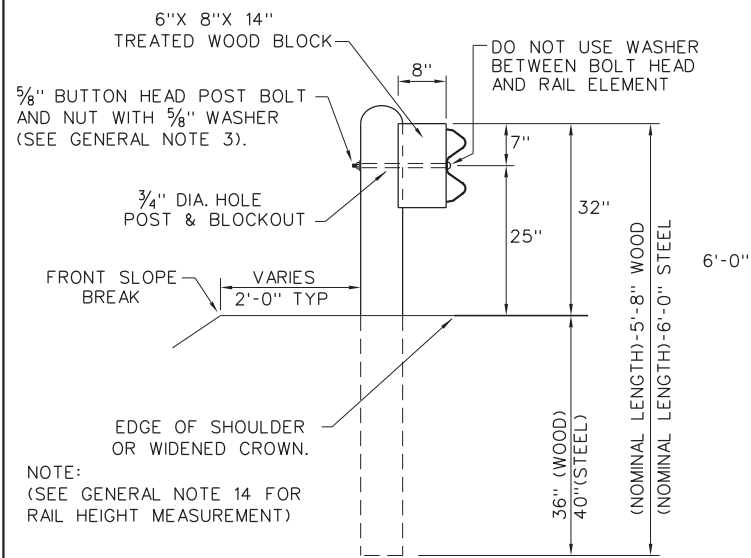


TYPICAL POST PLACEMENT

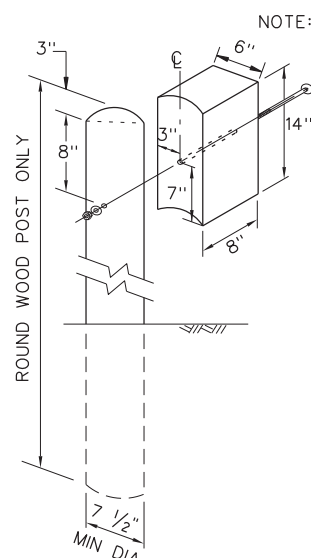

WOOD BLOCK TO ROUND WOOD POST

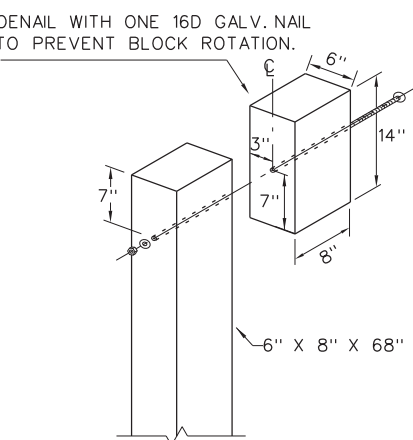

WOOD BLOCK TO RECTANGULAR WOOD POST

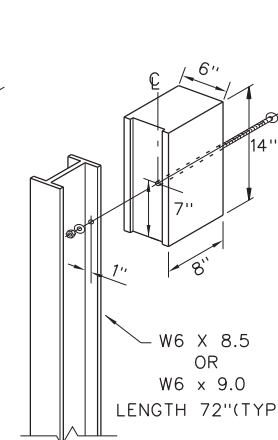


ROUTED WOOD BLOCK TO I-BEAM STEEL POST

GENERAL NOTES


1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25'-0", OR 12'-6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE DOWNSTREAM ANCHOR TERMINAL (DAT) AND THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC16a) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. UNLESS OTHERWISE SHOWN IN THE PLANS, GUARD FENCE PLACED IN THE VICINITY OF CURBS SHALL BE POSITIONED SO THAT THE FACE OF CURB IS LOCATED DIRECTLY BELOW OR BEHIND THE FACE OF THE RAIL. RAIL PLACED OVER CURBS SHALL BE INSTALLED SO THAT THE POST BOLT IS LOCATED APPROXIMATELY 25 INCHES ABOVE THE GUTTER PAN OR EDGE OF SHOULDER.
9. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. IF SOLID ROCK IS ENCOUNTERED WITHIN 0 TO 18" OF THE FINISHED GRADE, DRILL A 24" DIA. HOLE, 24" INTO THE ROCK. IF SOLID ROCK IS ENCOUNTERED BELOW 18", DRILL A 12" DIA. HOLE, 12" INTO THE ROCK OR TO THE STANDARD EMBEDMENT DEPTH, WHICHEVER MAYBE LESS. ANY EXCESS POST LENGTH, AFTER MEETING THESE DEPTHS, MAY BE FIELD CUT TO ENSURE PROPER GUARDRAIL MOUNTING HEIGHT. BACKFILL WITH COARSE AGGREGATE MATERIAL.
10. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
11. SPECIAL FABRICATION WILL BE REQUIRED AT INSTALLATION LOCATIONS HAVING A CURVATURE OF LESS THAN 150 FT. RADIUS.
12. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210 ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
13. FOR THE LOW FILL CULVERT OPTION, POSTS LOCATED PARTIALLY OR WHOLLY BETWEEN PRECAST BOX CULVERT UNITS, THE USE OF A CAST-IN-PLACE CONCRETE CLOSURE BETWEEN BOXES IS REQUIRED. THE LENGTH OF THE CAST-IN-PLACE CONCRETE CLOSURE SHALL ACCOMMODATE THE PLACEMENT OF THE LOW FILL CULVERT OPTION. SEE CONCRETE CLOSURE DETAILS ON BRIDGE STANDARD SCP-MD.
14. GUARDRAIL HEIGHT MEASUREMENT: WHEN THE GUARDRAIL IS LOCATED ABOVE PAVEMENT, MEASURE THE HEIGHT FROM THE PAVEMENT TO THE TOP OF THE W-BEAM RAIL. WHEN THE GUARDRAIL IS LOCATED UP TO 2 FT. OFF OF THE EDGE OF PAVEMENT OR FOR A PAVEMENT OVERLAY, USE A 10-FOOT STRAIGHTEDGE TO EXTEND THE PAVEMENT/SHOULDER SLOPE TO THE BACK OF RAIL, MEASURE FROM THE BOTTOM OF STRAIGHTEDGE TO THE TOP OF RAIL. FOR GUARDRAIL LOCATED DOWN A 10:1 SLOPE, MEASURE FROM THE NOMINAL TERRAIN.

NOTE: \*WOOD\* INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

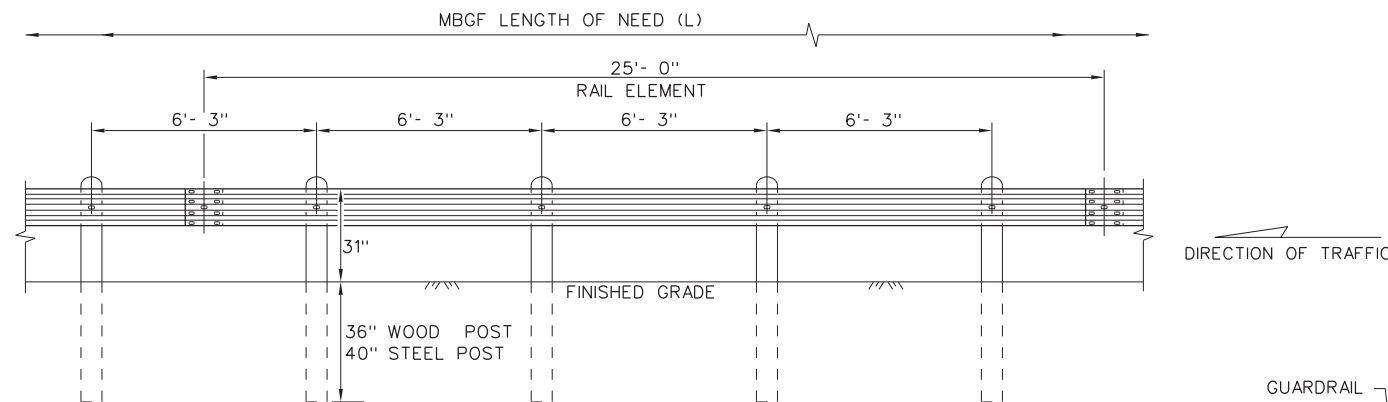

ELEVATION MID-SPAN RAIL SPLICE

SHOWING A 25'-0" SECTION OF W-BEAM RAIL. (SEE GENERAL NOTE 2)

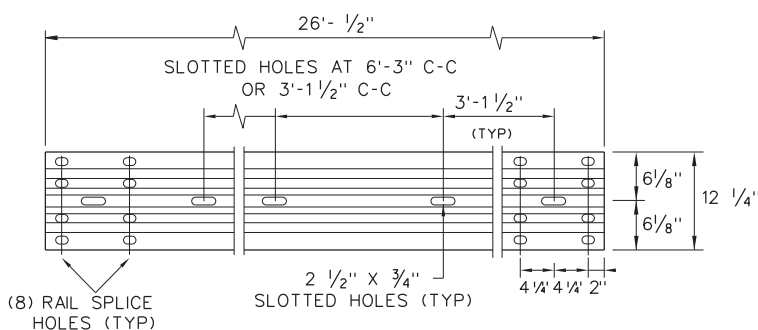

ELEVATION 25'-0" (NOM.) W-BEAM SECTION

NOTES: SEE GENERAL NOTE 2 FOR ALLOWABLE RAIL TYPES. SEE RAIL SPLICE DETAIL FOR REQUIRED HARDWARE.

NOTE: FOUR TYPES OF BUTTON-HEAD GUARD RAIL BOLTS COME WITH A RECESSED NUT.

SPLICE BOLT LENGTH VARIES

FBB01 = 1 1/4"

FBB02 = 2"


POST & BLOCK LENGTH

FBB03 = 10"

FBB04 = 18"

BUTTON HEAD BOLT

NOTE: SEE GENERAL NOTE 3 FOR SPLICE & POST BOLT DETAILS.

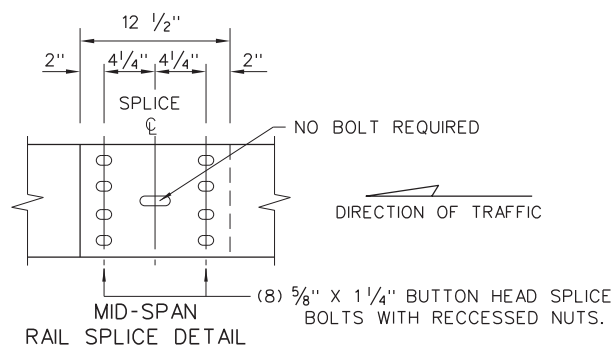

MID-SPAN RAIL SPLICE DETAIL


NOTE: GF(31), MID-SPAN RAIL SPLICES ARE REQUIRED WITH 6'-3" POST SPACINGS.

\*POST(S) MAY REQUIRE FIELD MODIFICATION TO ENSURE PROPER GUARDRAIL HEIGHT.

9" MIN. FILL DEPTH CULVERT SLAB

12" X 12" X 1/4" (ASTM A36) STEEL BOTTOM PLATE WITH 1" DIA. HOLES REQUIRED WITH BOLT-THROUGH INSTALLATION.

LOW FILL CULVERT POST

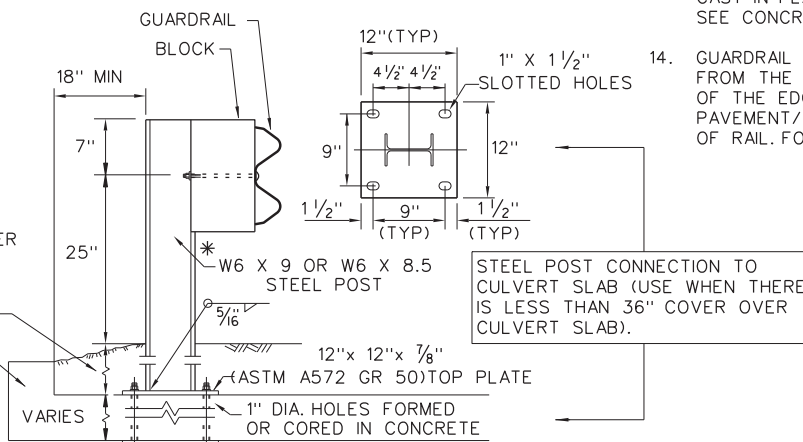

NOTE: TWO INSTALLATION OPTIONS.

1. BOLT-THROUGH OPTION: REQUIRES A 6" MIN. SLAB THICKNESS. 7/8" DIA (ASTM A449) HEAVY HEX BOLTS WITH TWO HARDENED WASHER EACH AND HEAVY HEX NUTS. NOTE: BOLT LENGTH = SLAB PLUS 2 1/4" MIN.

2. EPOXY ANCHOR OPTION: THIS OPTION MAY ONLY BE USED IF THE CULVERT SLAB IS 9" MIN. THICK. THREADED ANCHOR RODS MUST BE 7/8" DIA. ASTM A449 OR A193 GRADE B7 WITH HEAVY HEX NUT, AND ONE HARDENED WASHER EACH. EMBED ANCHOR RODS 6" WITH HILTI HIT RE 500 EPOXY ADHESIVE. OTHER TYPE III CLASS C EPOXY ADHESIVES MEETING THE REQUIREMENTS OF DMS-6100, "EPOXIES AND ADHESIVES", MAY BE USED IF IT CAN BE DEMONSTRATED THAT THEY MEET OR EXCEED THE STRENGTH OF HILTI HIT RE 500 WITH THE SAME EMBEDMENT DEPTH AND THREADED ROD DIA. FOLLOW THE MANUFACTURER'S REQUIREMENTS FOR INSTALLING EPOXIED THREADED RODS. EXTEND RODS 1/4" MIN. BEYOND NUT.


NOTE: CULVERTS OF 25 FT. OR LESS, SEE GF(31)LS STANDARD FOR "LONG SPAN" OPTION.

		<b>Design Division Standard</b>	
<h1>METAL BEAM GUARD FENCE</h1> <h2>TL-3 MASH COMPLIANT</h2> <h3>GF(31)-19</h3>			
FILE: gf3119.dgn	DN: TxDOT	CK: KM	DW: VP
© TxDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	6421	35	001
	DIST	COUNTY	US 287, ETC.
	WFS	MONTAGUE, ETC.	SHEET NO. 54

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master\_Design\_File\GF(31)LS-19.dgn

NOTE: TOENAIL WITH ONE 16D GALV. NAIL TO PREVENT BLOCK ROTATION.

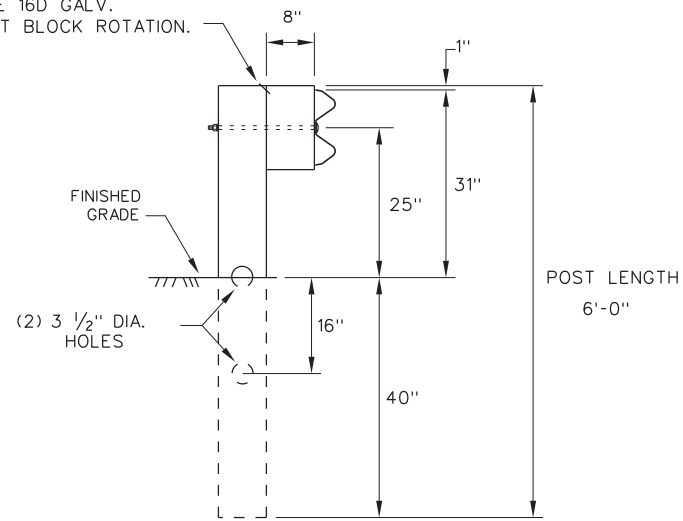

RECTANGULAR CRT POST  
(6" X 8" X 6' LONG)

(6) CRT REQUIRED  
SEE ELEVATION DETAIL FOR LOCATIONS

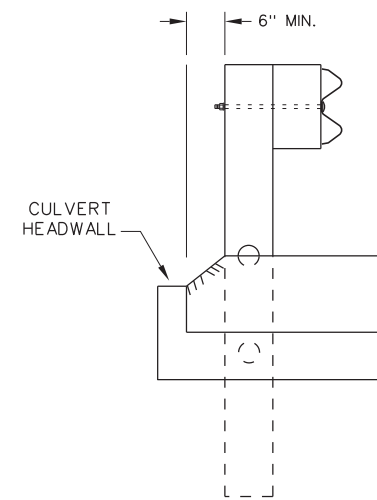

LATERAL OFFSET BETWEEN THE  
GUARDRAIL AND THE CULVERT HEADWALL


DIRECTION OF TRAFFIC

GENERAL NOTES

1. THE TYPE OF LINE POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF THE TRANSITIONS SHALL BE AS SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENT SHALL MEET ALL REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 12'- 6" OR 25'- 0" NOMINAL LENGTHS.
3. RAIL POST HOLES ARE OFFSET 3'- 1/2" FROM STANDARD GUARDRAIL TO ACCOMMODATE THE MIDSPAN SPlicing.
4. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC16a) AND NO MORE THAN 1" BEYOND IT.
5. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
6. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
7. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
8. REFER TO GF(31) STANDARD SHEET FOR ADDITIONAL DETAILS.
9. FLAME CUTTING OF HOLES IN GUARDRAIL SHALL NOT BE PERMITTED. IF YOU ENCOUNTER MIS-ALIGNED BOLT HOLES IN GUARDRAIL CONTACT THE DESIGN DIVISION FOR ADDITIONAL INFORMATION & OPTIONS.

NOTE: SEE GF(31) STANDARD FOR STANDARD LINE POSTS.

GF(31) - LONG SPAN SYSTEM (PAID FOR BY THE EACH)

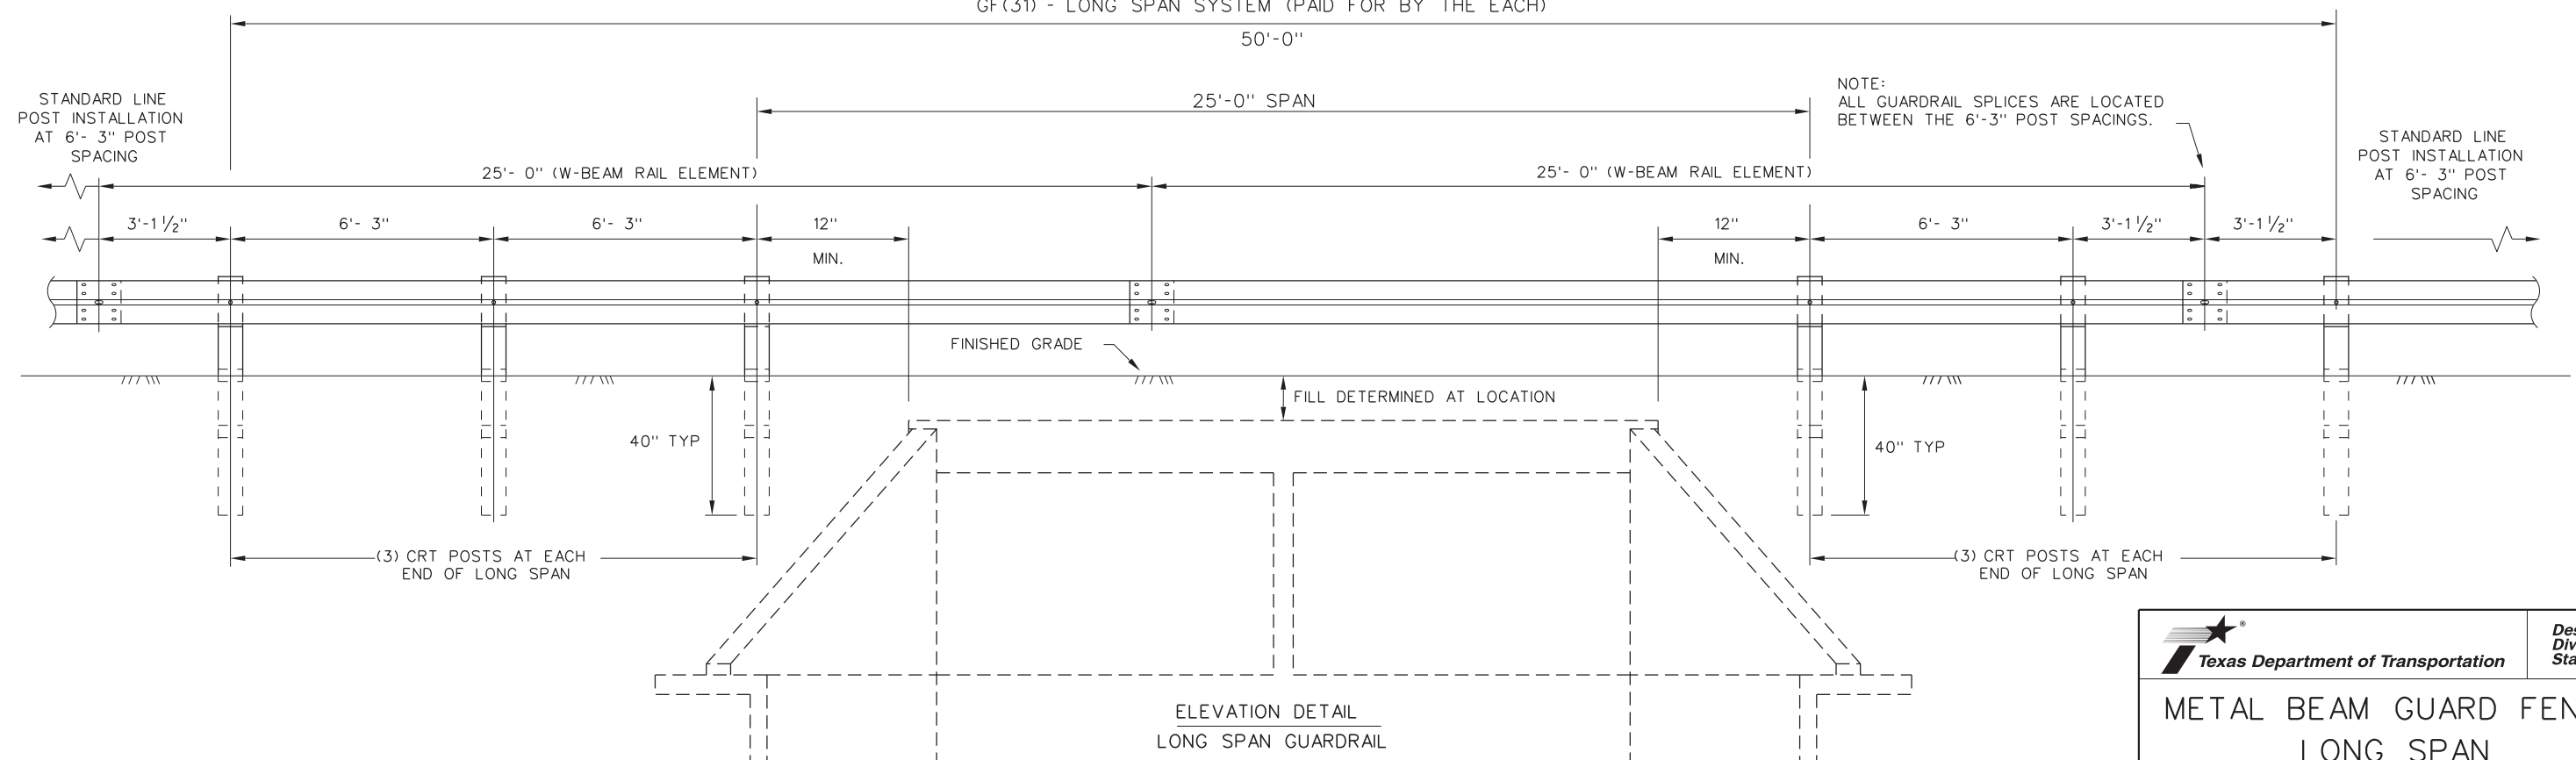


ELEVATION DETAIL  
LONG SPAN GUARDRAIL

		<b>Design Division Standard</b>	
<b>METAL BEAM GUARD FENCE LONG SPAN TL-3 MASH COMPLIANT</b>			
<b>GF(31)LS-19</b>			
FILE: gf31ls19.dgn	DN: TxDOT	CK: KM	DW: VP
© TXDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	6421	35	001
	DIST	COUNTY	SHEET NO.
	WFS	MONTAGUE, ETC.	55

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\GF(31)MS-19.dgn

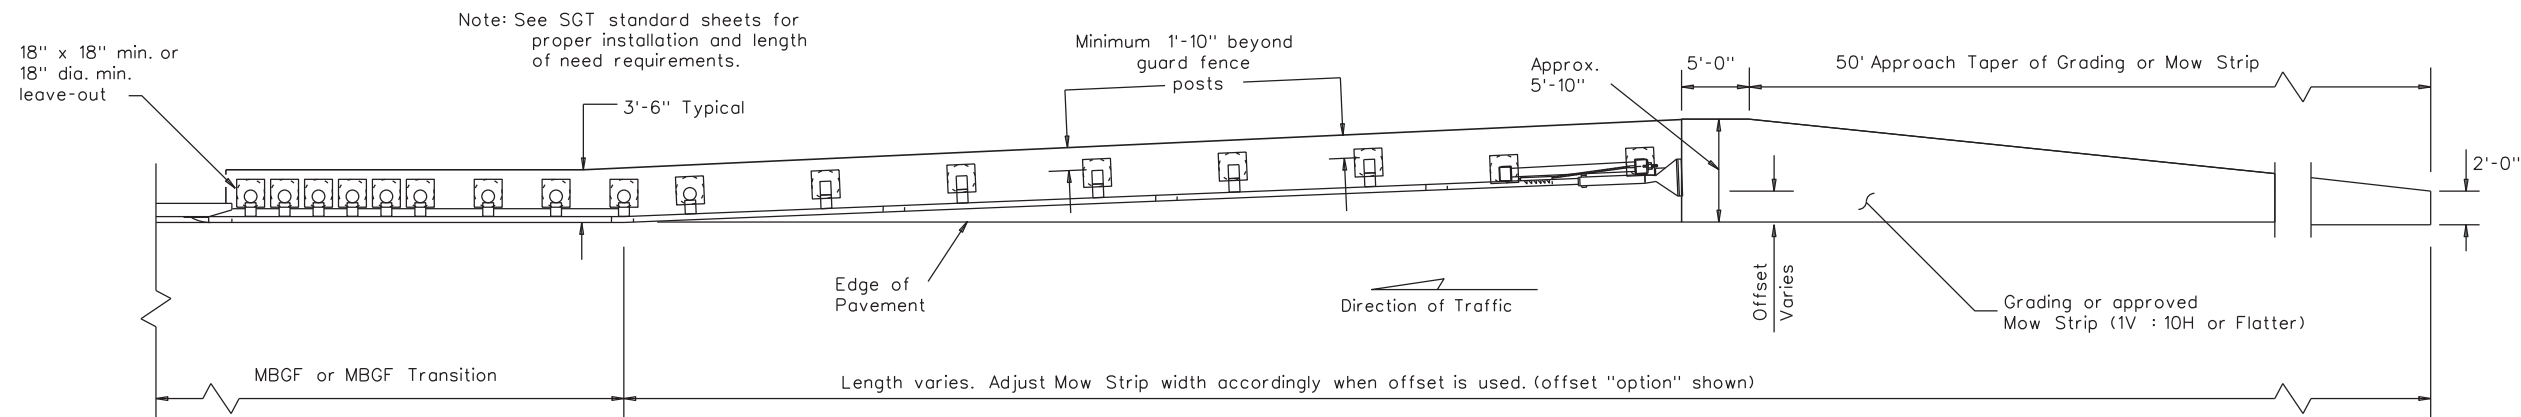


Note: See SGT standard sheets for proper installation and length of need requirements.

**GRADING AND MOW STRIP AT GUARDRAIL END TREATMENTS**

Note: Site Condition(s)

Site conditions may exist where grading is required for the proper installation of metal guard fence and end treatments.  
 Approach grading or mow strip may be decreased or eliminated, as directed by the Engineer.

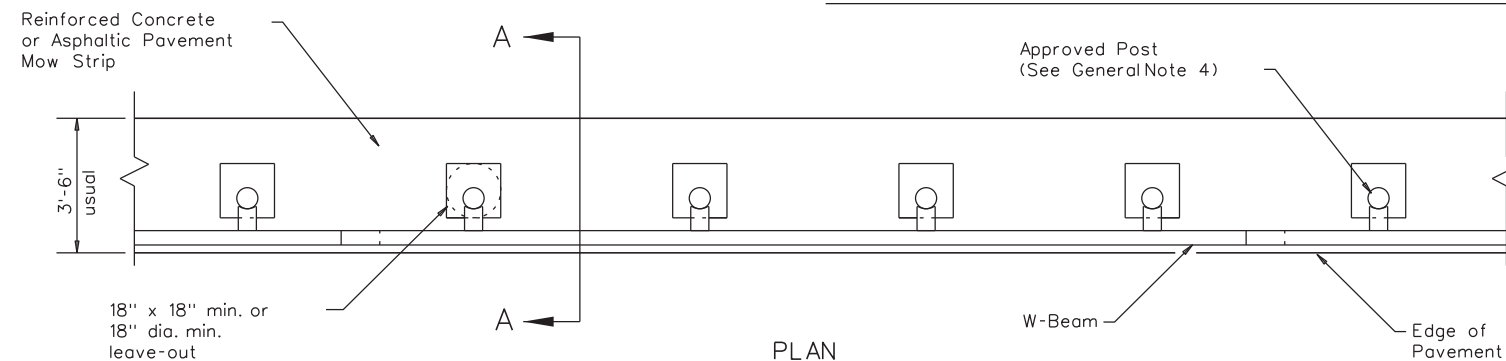


**PLAN**

GF(31) shown with Mow Strip (See GF(31) standard sheet for proper installation)


**GENERAL NOTES**

1. This mow strip design is for use with metal beam guard fence, guard fence transitions, and guard fence end treatments. See applicable GF(31) MBGF or GF(31) Transition Standard sheet for additional information.
2. Mow strips shall be reinforced concrete with (wire mesh or synthetic fiber), as shown on the plans and will be paid for under the pertinent bid item. Reinforced concrete shall be placed in accordance with Item 432, "Riprap." The use of the synthetic fiber in lieu of steel reinforcing is acceptable, provided the fiber producer is on the Department Material Producer List (MPL), maintained by TxDOT, Construction Division.
3. The leave-out behind the post shall be a minimum of 7".
4. Only steel (W6 x 8.5 or W6 x 9.0), or 7 1/2" Dia. round wood posts are acceptable for use in the mow strip. See GF(31) Standard for additional details.
5. Other curb placement options may be used. Curbs are not considered part of the mow strip and will be paid for under other pertinent bid item.
6. Thickness of the mow strip will be 4".
7. The limits of payment for reinforced concrete will include leave-outs for the posts.
8. The leave-outs shall be filled with a Grout mixture consisting of: 2719 pounds sand, 188 pounds Type 1 or II cement, and 550 pounds of water per cubic yard, with a 28-day compressive strength of approximately 230 psi or less. Provide grout with a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (Suggested Maximum leave-out of 20"). Payment for furnishing and placing the grout mixture will be subsidiary to the pay item of riprap mow strip.

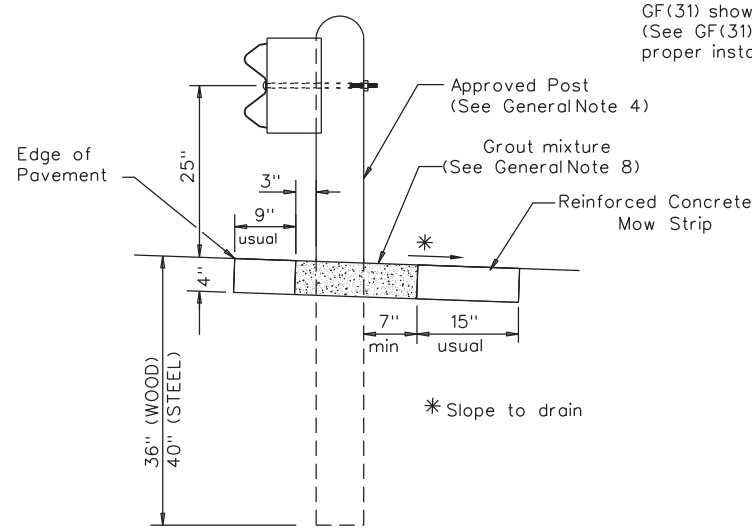


**SECTION A-A**

Typical

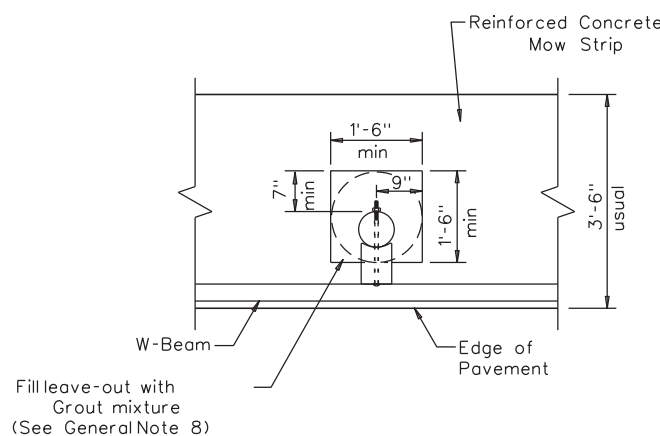


**MOW STRIP DETAIL**

Reinforced Concrete Mow Strip with 18" x 18" Square or 18" Dia. minimum leave-out.

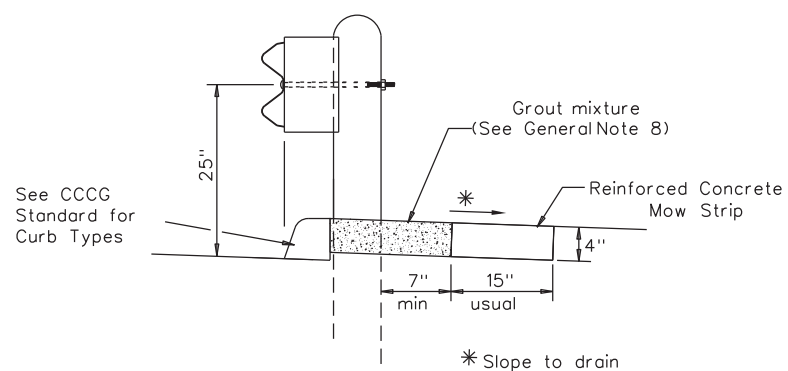


**CURB OPTION (1)**

This option will increase the post embedment throughout the system.

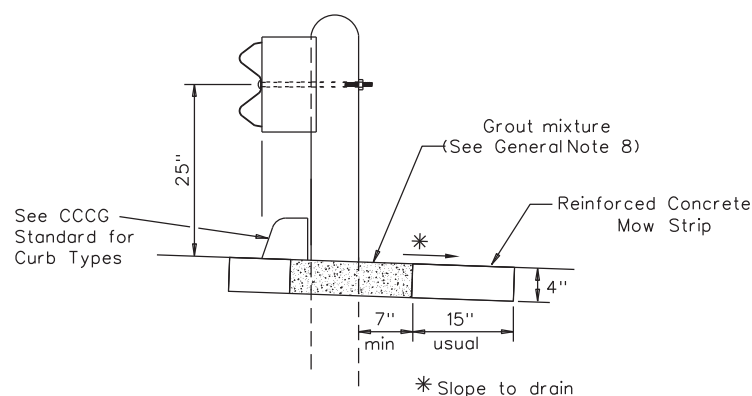

**CURB OPTION (2)**

Curb shown on top of mow strip

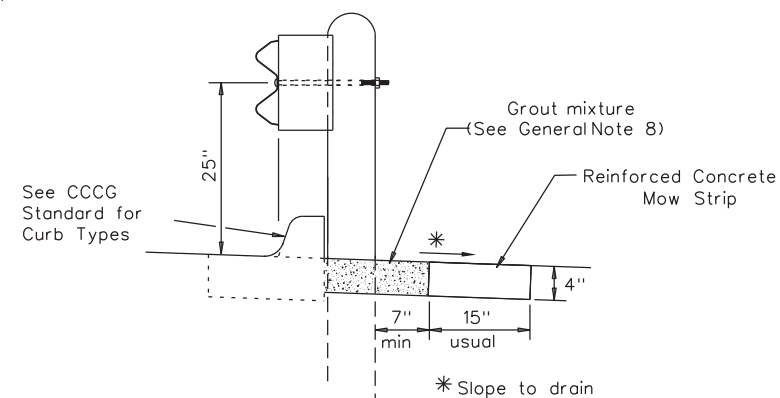


**CURB OPTION (3)**

				<b>Design Division Standard</b>
<b>METAL BEAM GUARD FENCE (MOW STRIP)</b> <b>TL-3 MASH COMPLIANT</b> <b>GF(31)MS-19</b>				
FILE: gf31ms19.dgn	DN: TxDOT	CK: KM	DW: VP	CK: CGL/AG
© TxDOT: NOVEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	56	



DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\GF(31)TR TL3-20.dgn  
 DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

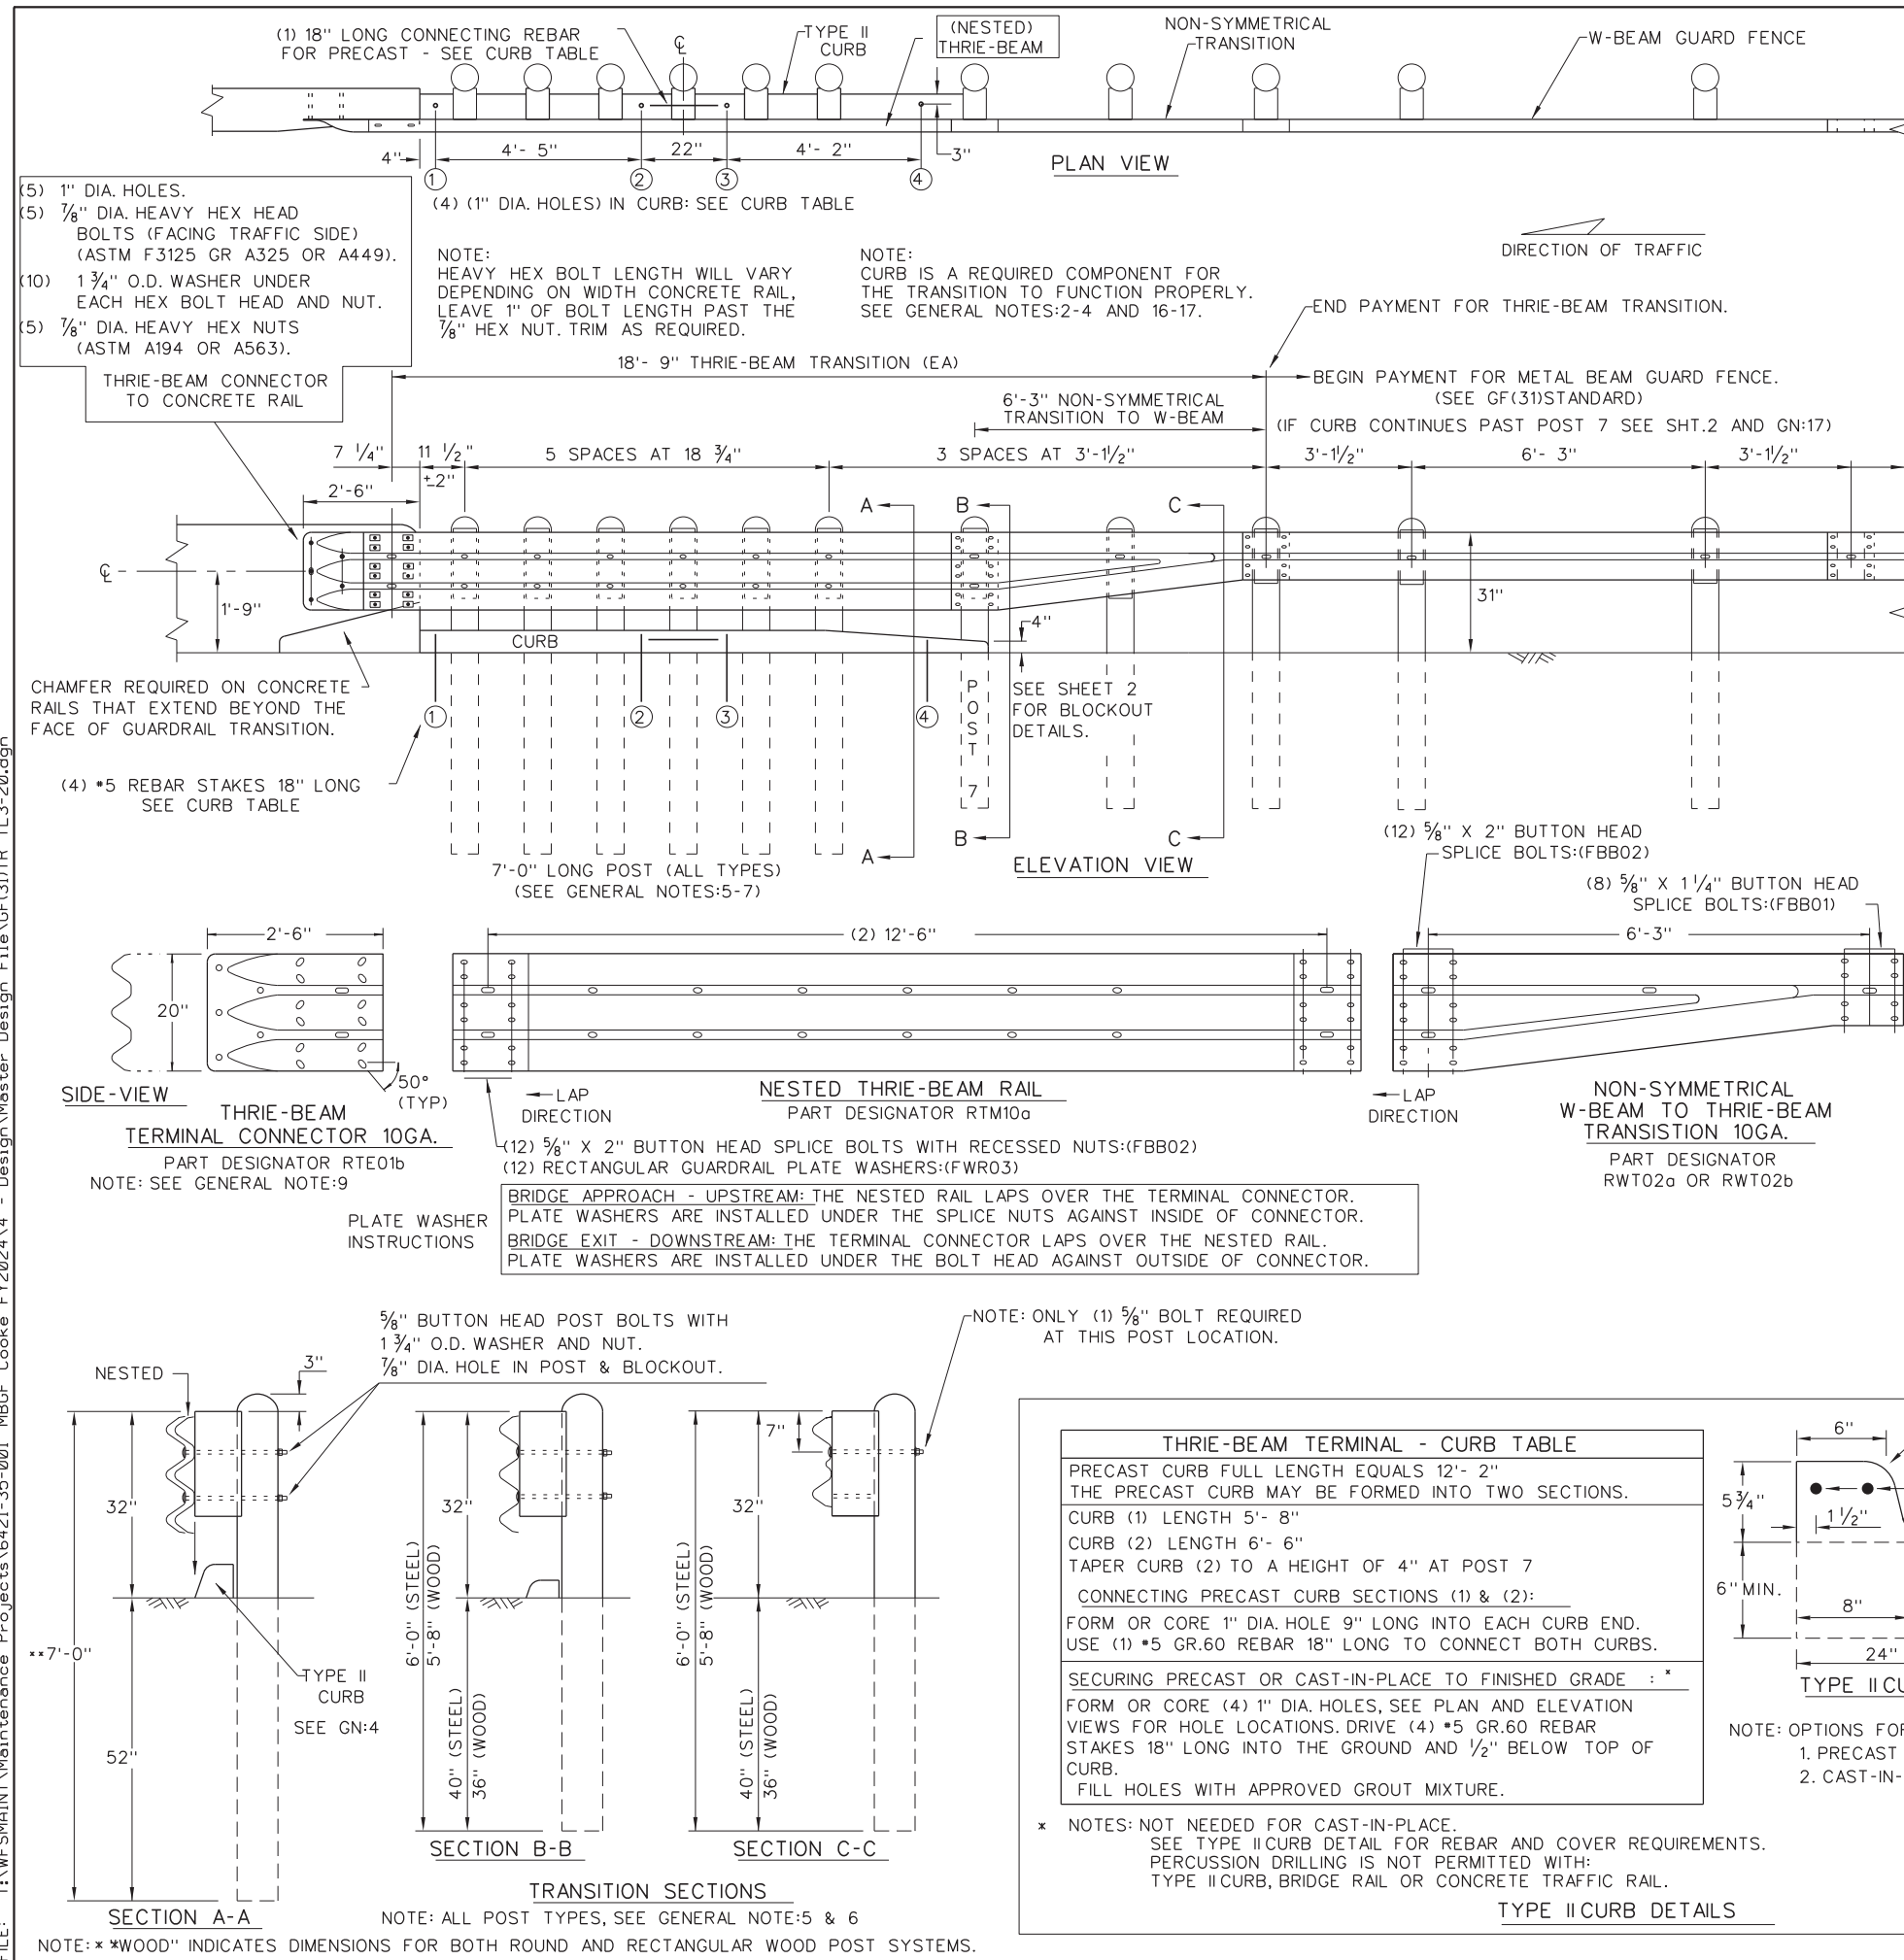

**GENERAL NOTES**

- CONTACT THE DESIGN DIVISION FOR DRAINAGE CUT OUT OPTIONS NEEDED WITHIN THE CURB SECTION OF THE THRIE-BEAM TRANSITION. (512) 416-2678
- CONCRETE CURB MAY BE CAST-IN-PLACE OR PRECAST AS SHOWN ON THIS SHEET, WHEN USED IN CONJUNCTION WITH THE THRIE-BEAM TRANSITIONS, CURB SHALL BE TYPE II (5- 3/4" HEIGHT); SEE CURRENT CCGG STANDARD SHEET FOR FURTHER DETAILS. IF OTHER CURB HEIGHTS ARE SHOWN IN THE PLANS IN CONJUNCTION WITH THE TRANSITION, THE CURB HEIGHT MAY BE FROM 4" TO 8" WITH A RELATIVELY VERTICAL FACE. CONCRETE CURB SHALL BE CONTINUOUS TO THE SEVENTH POST UNLESS OTHERWISE SHOWN IN THE PLANS. SEE GENERAL NOTE:17 FOR CIRCUMSTANCES WHERE CURB CONTINUES PAST POST 7.
- CONCRETE CURB TYPE II SUBSIDIARY TO "METAL BEAM GUARD FENCE TRANSITION". IF NO ADDITIONAL CURB IS INDICATED BEYOND THE TRANSITION, THEN ANY CURB HEIGHT GREATER THAN 4" WILL BE TAPERED DOWN BEGINNING AT THE LAST 7 FT. POST TO A MAXIMUM HEIGHT OF 4" AT POST 7. IF SHOWN ELSEWHERE IN THE PLANS, ADDITIONAL CURB UNDERNEATH GUARDRAIL WILL BE PAID FOR BY THE LINEAR FOOT.
- UNLESS OTHERWISE SHOWN IN THE PLANS, TRANSITIONS SHALL BE PLACED WITH THE BLOCKOUT FACE IN FRONT OF OR DIRECTLY ABOVE THE CURB FACE. SEE SECTION A-A.
- FOR ROUND WOOD POST SYSTEMS, ALL ROUND WOOD POSTS SHALL BE 7 1/2" DIA. MINIMUM THROUGHOUT THE THRIE-BEAM TRANSITION.
- THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. REFER TO GF(31) STANDARD SHEET.
- THE POST LENGTH SHALL BE MARKED ON ALL 7'- 0" LONG POSTS BY THE MANUFACTURER. THE MARK SHALL BE LOCATED WITHIN THE TOP 1 FT. REGION OF THE POST, AT LEAST 5/8" IN HEIGHT, AND VISIBLE AFTER INSTALLATION. WOODEN POSTS SHALL BE MARKED WITH A BRAND, AND STEEL POSTS WITH A STENCIL BEFORE GALVANIZING.
- POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
- RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE THRIE-BEAM TERMINAL CONNECTOR AND THE THRIE-BEAM TRANSITION TO W-BEAM SHALL BE OF THE SAME MATERIAL, BUT SHALL NOT BE LESS THAN 10 GAUGE. CONTRACTOR SHALL VERIFY THAT THE LOCATIONS OF BOLT HOLES MATCH THOSE IN THE THRIE-BEAM TERMINAL CONNECTOR PRIOR TO ORDERING MATERIALS.
- BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC16a) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
- FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
- CROWN SHALL BE WIDENED TO ACCOMMODATE TRANSITIONS.
- WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
- UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. TXDOT'S MATERIALS AND TESTS DIVISION MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL CAN FURNISH COMPOSITE MATERIAL BLOCKS.
- REFER TO GF(31) STANDARD SHEET & BRIDGE RAILING DETAILS FOR ADDITIONAL DETAILS.
- THE INSTALLATION OF THE TYPE II CURB IS CRITICAL FOR THE PERFORMANCE OF THE THRIE-BEAM TRANSITION SYSTEM. THE CURB PREVENTS (VEHICLE WHEEL SNAGGING) AT THE CONCRETE RAIL AND IS REQUIRED TO MEET MASH CRASH TEST CRITERIA.
- IF CURB EXTENDS BEYOND POST 7, 25' OF NESTED W-BEAM GUARDRAIL SHALL BE INSTALLED BEYOND THE PAY LIMITS OF THRIE-BEAM TRANSITION SECTION, (SEE SHT.2). PAYMENT FOR THIS 25' SECTION WILL BE BY LINEAR FOOT, PAY ITEM "0540 6XXX MTL W-BEAM GD FEN (NESTED)(TIM POST)" OR "540 6XXX MTL W-BEAM GD FEN (NESTED)(STEEL POST)" AS APPLICABLE FOR POST TYPE. SEE SHT.2 FOR ADDITIONAL INFORMATION.

**HIGH-SPEED TRANSITION**

SHEET 1 OF 2

**METAL BEAM GUARD FENCE  
THRIE-BEAM TRANSITION  
TL-3 MASH COMPLIANT**

**GF(31)TR TL3-20**


FILE: gf31trtl320.dgn	DN: TxDOT	CK: KM	DW: VP	CK: CGL / AG
© TXDOT: NOVEMBER 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	57	

Design Division Standard


DISCLAIMER:  
 THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER.  
 TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\GF(31)TR TL3-20.dgn


REQUIRED ALTERNATIVE FOR CONTINUOUS CURB EXTENDING PAST POST 7 (SEE SHT. 1 GENERAL NOTE 17)

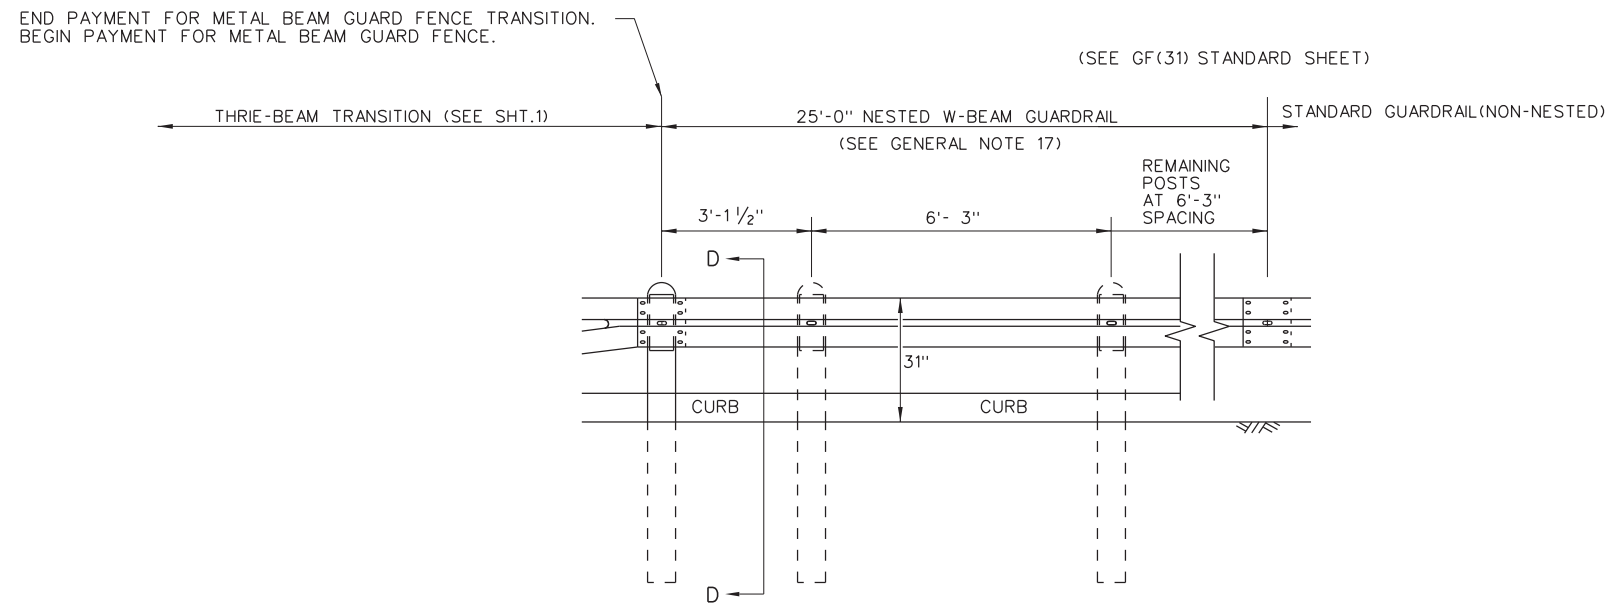

ELEVATION VIEW

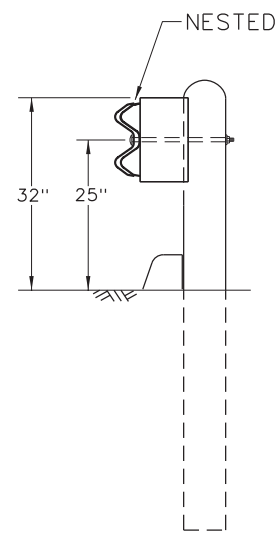

SECTION D-D

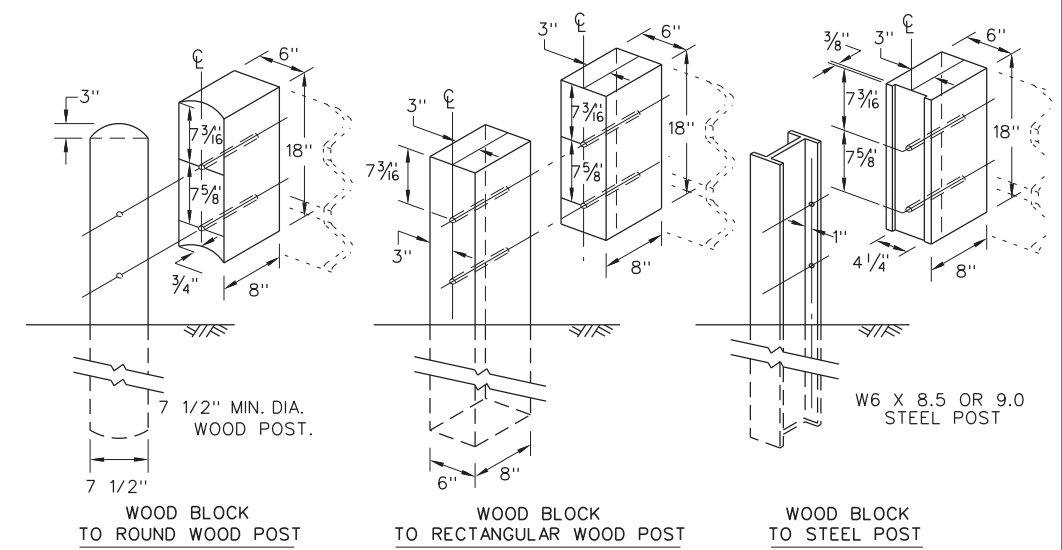

THRIE BEAM TRANSITION BLOCKOUT DETAILS

HIGH-SPEED TRANSITION

SHEET 2 OF 2




METAL BEAM GUARD FENCE  
 THRIE-BEAM TRANSITION  
 TL-3 MASH COMPLIANT  
 GF(31)TR TL3-20


FILE: gf31trtl320.dgn	DN: TxDOT	CK: KM	DW: KM	CK: CGL/AG
© TXDOT: NOVEMBER 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	58	

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 12/20/2023  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\MBGF(SR)-19.dgn

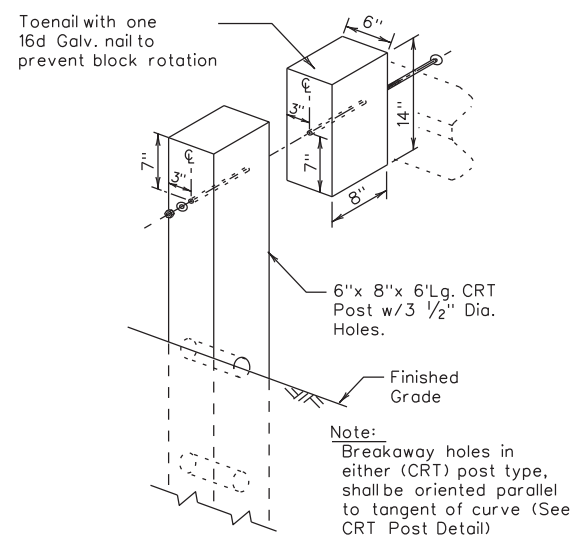


**WOOD BLOCK TO RECTANGULAR WOOD (CRT) POST**  
 Showing the required 3 1/2" Dia. holes.


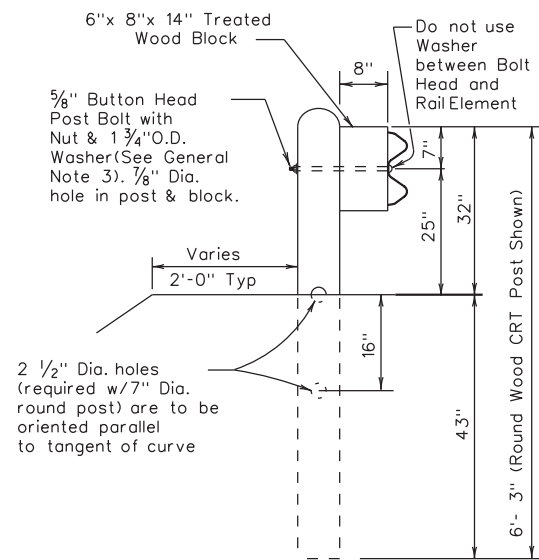


**(CRT) POST DETAIL CONTROLLED RELEASE TERMINAL POST**

Two or more wood CRT post(s) are required at any radius installation located at intersecting roadways or driveways.

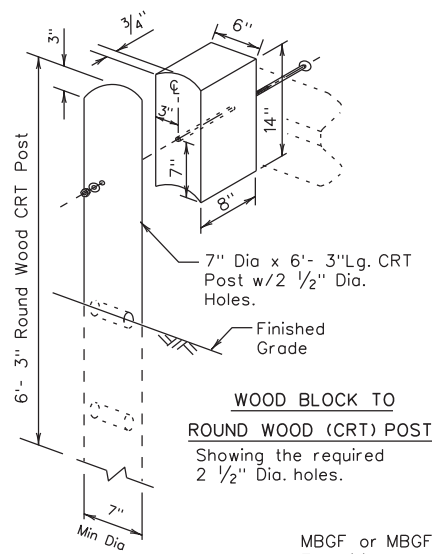

**WOOD BLOCK TO ROUND WOOD (CRT) POST**  
 Showing the required 2 1/2" Dia. holes.

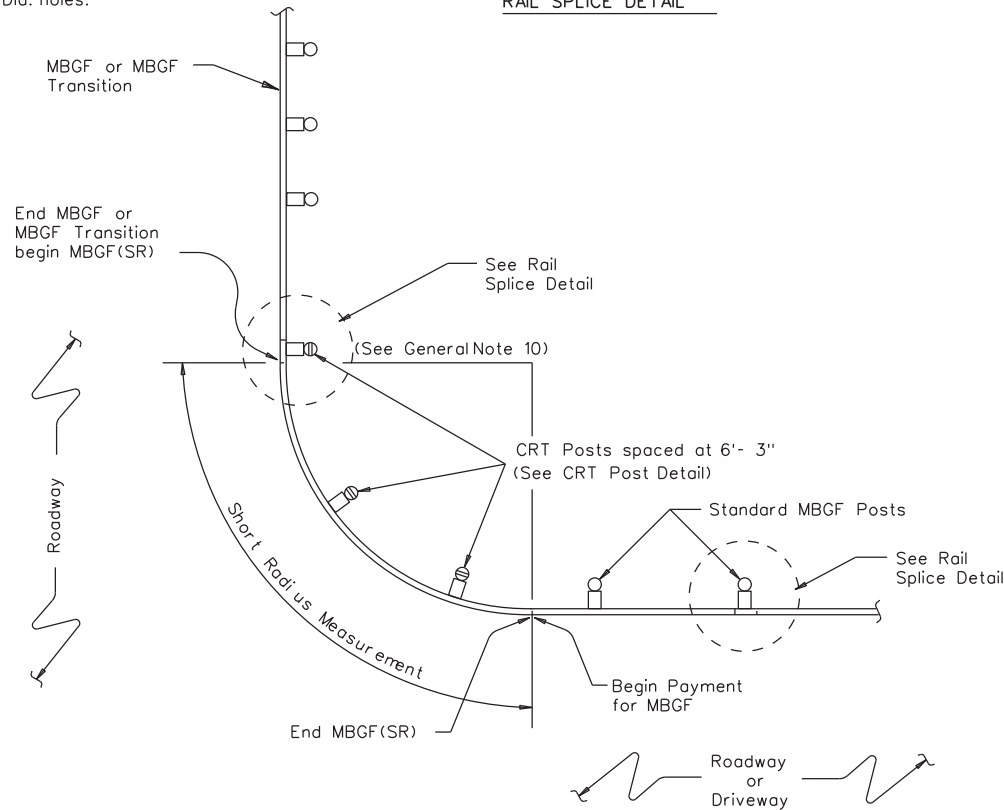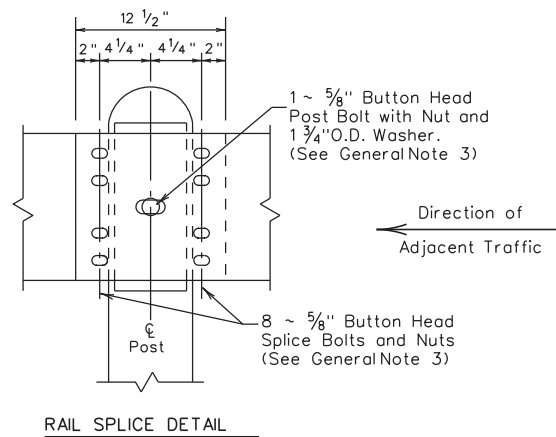


**PLAN VIEW SHOWING TYPICAL RADIUS**

The required radius is shown elsewhere on the plans.

**GENERAL NOTES**

- The type of (CRT) post (round wood post, or rectangular wood post) will be shown elsewhere in the plans. The exact position of MBGF shall be shown elsewhere in the plans or as directed by the Engineer.
- Steel posts are not permitted at CRT post positions.
- Rail element shall meet the requirements of Item 540, "Metal Beam Guard Fence" except as modified on the plans. The Contractor may furnish rail elements of 12 1/2 or 25 foot nominal lengths.
- Button head "post" bolts (ASTM A307) shall be of sufficient length to extend through the full thickness of the nut (ASTM A563) and Type A (1 3/4" O.D.) washer and not more than 1" beyond it. Button head "splice" bolts (ASTM A307) are 5/8" x 1 1/4" (or 2" long at triple rail splices) with a 5/8" double recessed nut (ASTM A563).
- Fittings (bolts, nuts, and washers) shall be galvanized in accordance with Item 445, "Galvanizing." Fittings shall be subsidiary to the bid item.
- Crown shall be widened to accommodate the Metal Beam Guard Fence.
- The lateral approach to the guard fence, shall have a slope rate of not more than 1V:10H.
- Unless otherwise shown in the plans, guard fence placed in the vicinity of curbs shall be positioned so that the face of curb is located directly below or behind the face of the block. Rail placed over curbs shall be installed so that the post bolt is located approximately 21 inches above the gutter pan or roadway surface.
- If solid rock is encountered within 0 to 18" of the finished grade, drill a 22" dia. hole, 24" into the rock, or drill two 12" dia. front to back overlapping holes, 24" into the rock. If solid rock is encountered below 18", drill a 12" dia. hole, 12" into the rock or to the standard embedment depth, whichever is less. Any excess post length, after meeting these depths, may be field cut to ensure proper guardrail mounting height. Backfill with a cohesionless material.
- Guardrail posts shall not be set in concrete, of any depth.
- Special rail fabrication will be required at installations having a curvature of less than 150 ft. radius. The required radius shall be shown on the plans.
- The terminal anchor section (TAS) post shall be set in Class A concrete (unless otherwise shown in the plans) in accordance with Item 421, "Hydraulic Cement Concrete." Concrete shall be subsidiary to the bid item requiring construction of the terminal anchor section (TAS). Terminal anchor post to be galvanized in accordance with Item 445, "Galvanizing."
- Unless otherwise shown in the plans, a composite material post and/or block that meets the requirements of DMS-7210, "Composite Material Posts and Blocks for Metal Beam Guard Fence" may be substituted for posts and/or blocks of similar dimensions. The Construction Division, TXDOT maintains a Material Producer List (MPL) for producers of materials conforming to DMS-7210. Only producers on the MPL can furnish composite material posts and/or blocks.



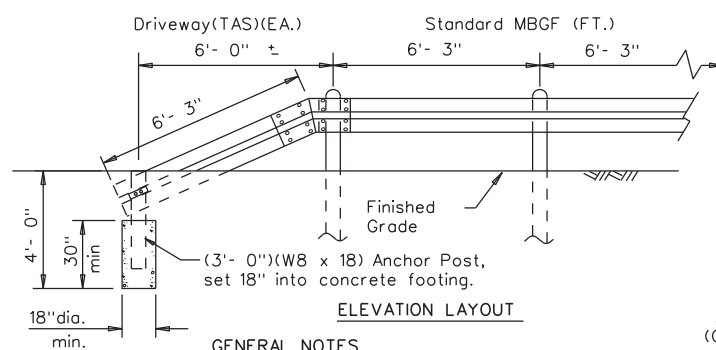


**GENERAL NOTES**

- The "Driveway" Terminal Anchor Section is ONLY to be used within driveway locations, where the ROW is limited and a standard 25 ft. (TAS) Terminal Anchor Section, is too long.
- Terminal anchor post shall be set in Class A concrete.
- All steel shall be galvanized after fabrication in accordance with Item 445, "Galvanizing."

**"DRIVEWAY" TERMINAL ANCHOR SECTION**

Only for use within driveway locations, where a standard (TAS) Terminal Anchor Section can not be installed.

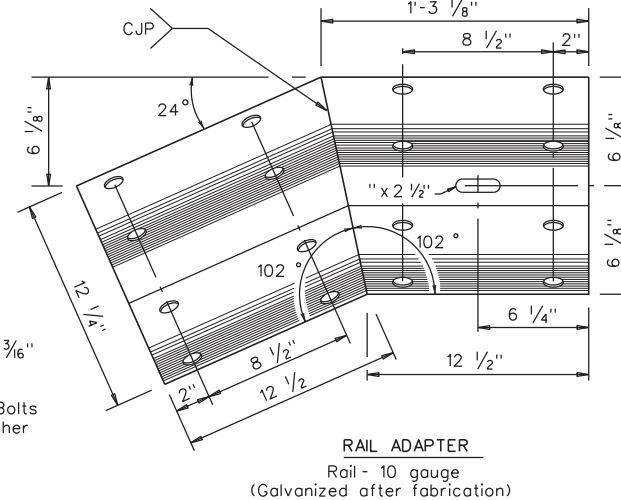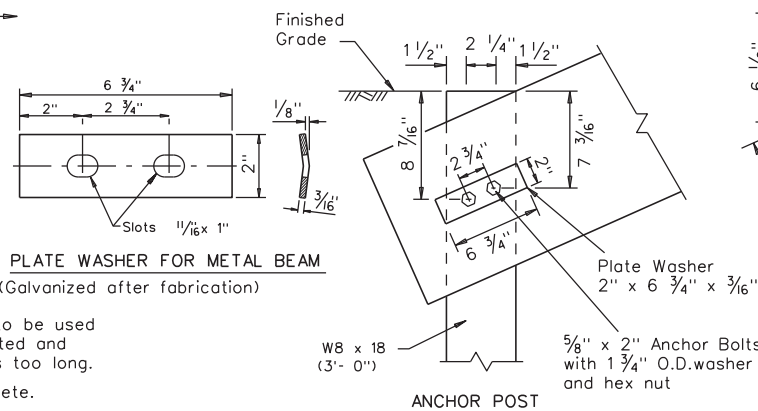


Michael D. Reynolds II, P.E.


12/21/2023

Texas Department of Transportation		Design Division Standard	
<b>METAL BEAM GUARD FENCE (SHORT RADIUS)</b>			
<b>MBGF(SR)-19 - MOD</b>			
FILE: mbgfsr19.dgn	DN: TxDOT	CK: KM	DW: BD
© TXDOT NOVEMBER 2019	CONT: 6421	SECT: 35	JOB: 001
REVISIONS			US 287, ETC.
	DIST: WFS	COUNTY: MONTAGUE, ETC.	SHEET NO.: 59

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

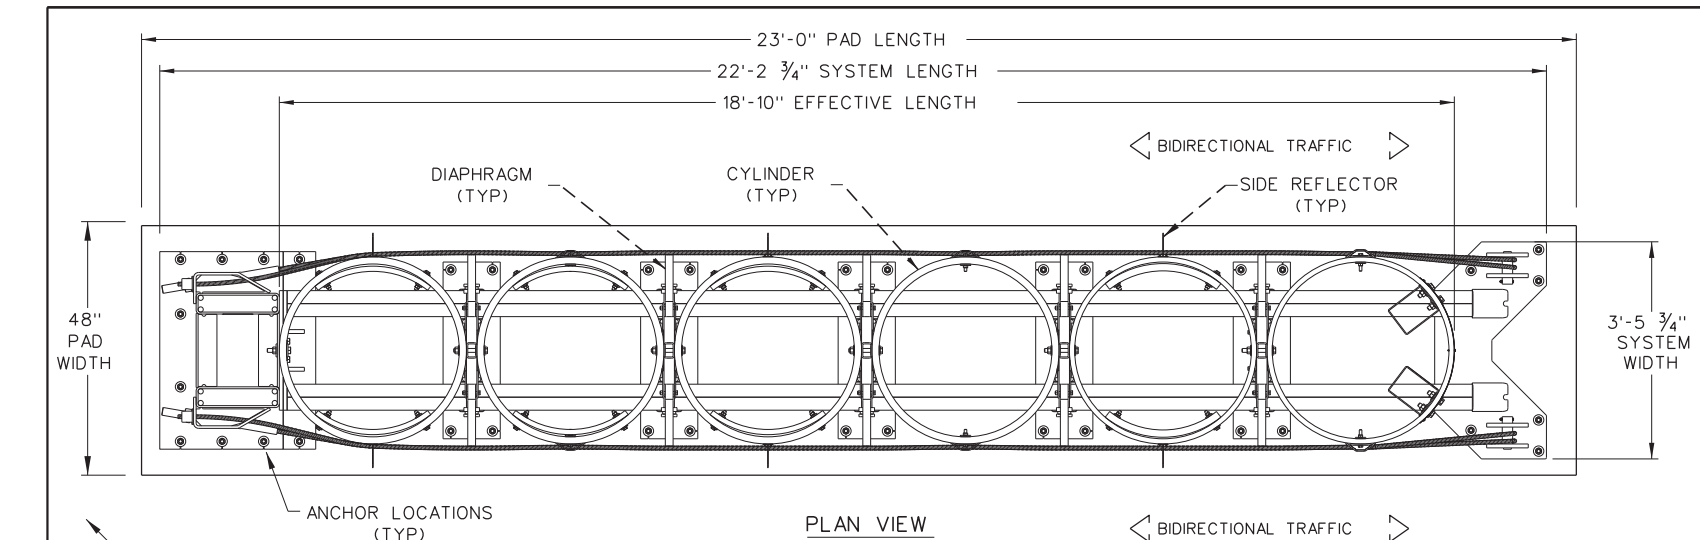


PLAN VIEW

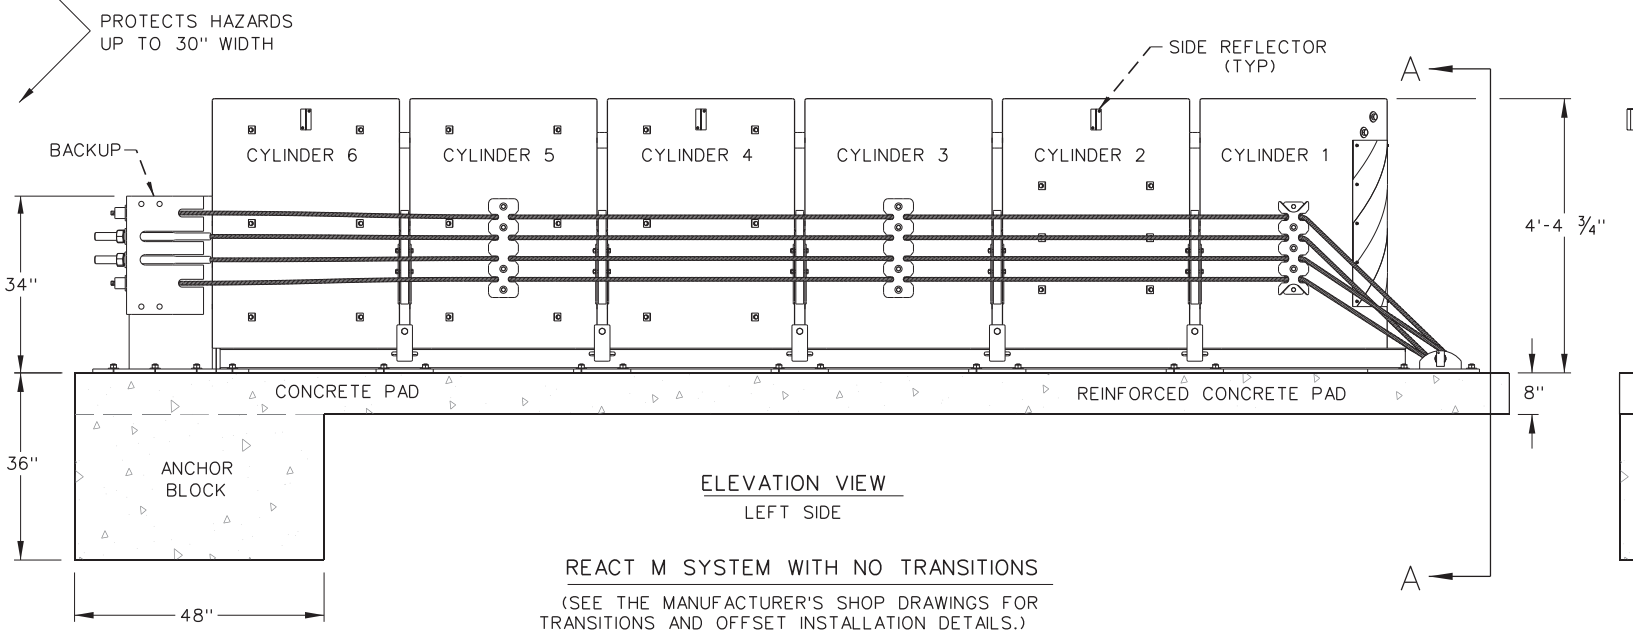


ELEVATION VIEW LEFT SIDE

REACT M SYSTEM WITH NO TRANSITIONS  
 (SEE THE MANUFACTURER'S SHOP DRAWINGS FOR TRANSITIONS AND OFFSET INSTALLATION DETAILS.)

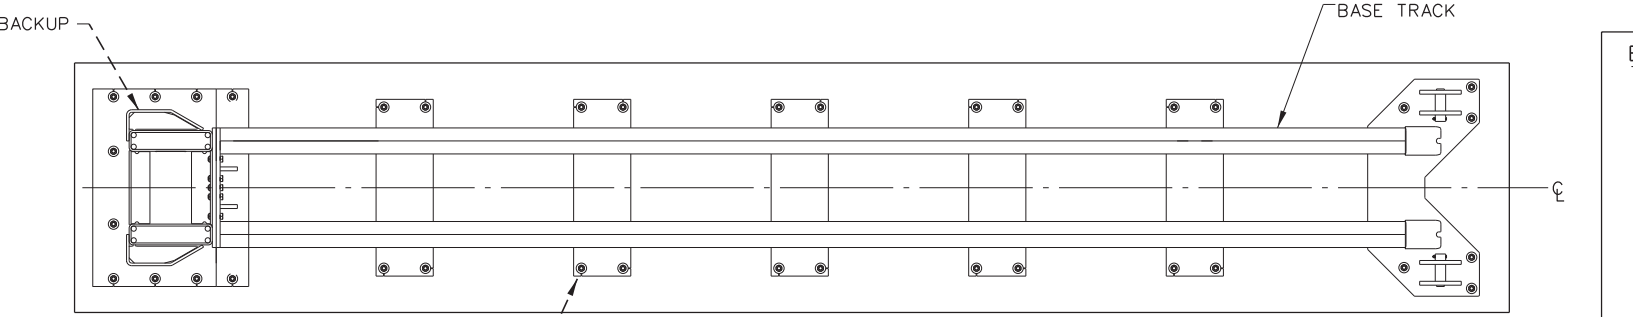


PLAN VIEW

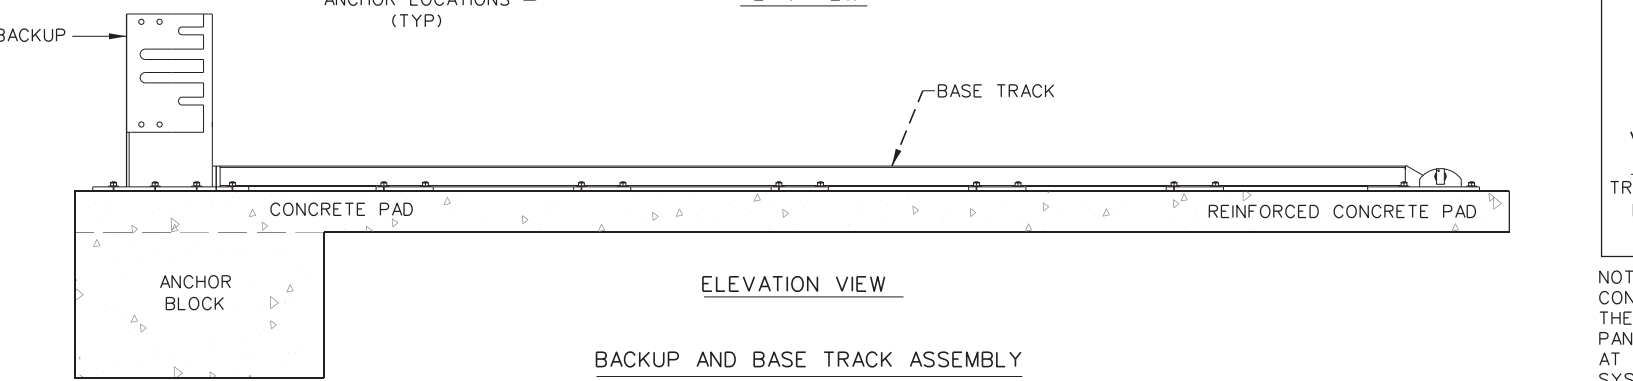


ELEVATION VIEW

BACKUP AND BASE TRACK ASSEMBLY  
 (SEE THE MANUFACTURER'S SHOP DRAWINGS FOR TRANSITIONS, OFFSETS, BIDIRECTIONAL AND UNIDIRECTIONAL INSTALLATION DETAILS.)

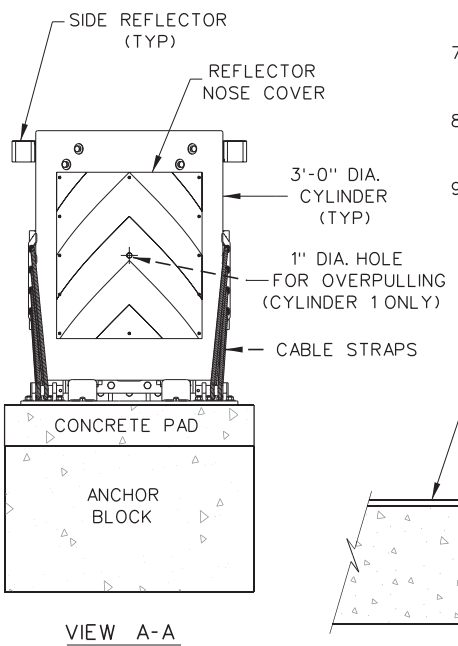


VIEW A-A

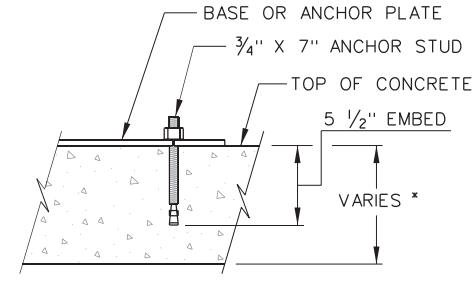

ANCHORING DETAIL \*SEE FOUNDATION TYPES TABLE

BACKUP ASSEMBLY TYPES FOR SYSTEM TRANSITIONS

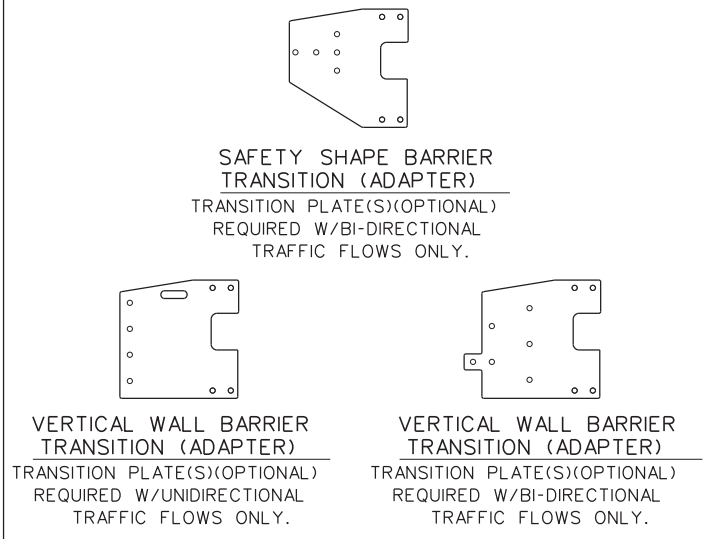

NOTES:  
 CONTACT THE MANUFACTURER WITH SITE SPECIFIC DATA (SSD) FOR THE CORRECT BACKUP ASSEMBLY AND TRANSITION PANELS OR SIDE PANELS USED FOR STANDARD AND BI-DIRECTIONAL INSTALLATIONS: AT DIVIDED-HIGHWAY MEDIANS OR UNDIVIDED ROADWAYS WHERE THE SYSTEM IS EXPOSED TO IMPACTS FROM ONE OR TWO DIFFERENT DIRECTIONS OF TRAFFIC FLOW.

GENERAL NOTES

- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: TRINITY HIGHWAY - ENERGY ABSORPTION AT 1(888)323-6374 OR WEBSITE: www.trinityhighway.com.
- THE NOSE OF THE REACT M SHALL BE CLAD WITH A PLASTIC WRAP WITH STANDARD DELINEATION ADHERED TO THE WRAP AND SHALL HAVE A SERIES OF SIDE MARKER REFLECTORS ON BOTH SIDES OF THE UNIT. SEE SITE PLAN VIEWS FOR MARKER AND PLASTIC WRAP COLOR ORIENTATION.
- FOR BI-DIRECTIONAL TRAFFIC, APPROPRIATE TRANSITION DETAILS WILL BE AS SHOWN ON THE MANUFACTURER'S SHOP DRAWINGS.
- DETAILS OF COMPONENTS FOR THE REACT M, BACKUPS AND REINFORCING DETAILS WILL BE SHOWN ON THE MANUFACTURER'S SHOP DRAWINGS FURNISHED TO THE ENGINEER.
- IF THE CROSS-SLOPE VARIES MORE THAN 2% OVER THE LENGTH OF THE SYSTEM, THE CONCRETE PAD WILL REQUIRE LEVELING. MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%.
- THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE REACT M SYSTEM SHOULD BE APPROXIMATELY PARALLEL WITH THE BARRIER OR CENTERLINE OF MERGING BARRIERS.
- ALL STEEL COMPONENTS TO BE HOT DIPPED GALVANIZED EXCEPT STAKES, DRIVE SPIKES, THREADED BOLTS IN BACKUP UNIT, AND WEDGE FITTINGS ON CABLES.
- THIS DRAWING REPRESENTS THE REACT M TL-3 SYSTEM, RE-DIRECTIVE, NON-GATING CRASH CUSHION THAT CAN PROTECT HAZARDS UP TO 30-INCHES IN WIDTH.

DESIGN DATA TABLE FOR REACT M

TEST NUMBER	TEST LEVEL	OVERALL LENGTH	TRANSITION LENGTH	SYSTEM WIDTH
3-30 TO 3-36	TL-3	22'-2 3/4"	-	3'-5 3/4"
3-37A	TL-3	22'-2 3/4"	9'-10 3/4"	3'-5 3/4"
3-38	TL-3	22'-2 3/4"	-	3'-5 3/4"

ANCHOR SYSTEM TYPE

APPROVED ADHESIVE, 7" STUDS, 5.5" EMBEDMENT

FOUNDATION TYPES

MINIMUM 8" REINFORCED PORTLAND CEMENT CONCRETE PAD (REQUIRED REINFORCING STEEL FOR CONCRETE PAD SHALL BE SHOWN ON THE MANUFACTURER'S SHOP DRAWINGS.)

MINIMUM 8" NON-REINFORCED PORTLAND CEMENT CONCRETE ROADWAY MEASURING AT LEAST 12' WIDE BY 50' LONG)

MINIMUM 7" CONCRETE DECK STRUCTURE, OR MINIMUM 6" REINFORCED CONCRETE ROADWAY

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE REACT M SYSTEM AND IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.



TRINITY HIGHWAY  
 ENERGY ABSORPTION  
 CRASH CUSHION  
 REACT M (NARROW)  
 (MASH TL-3)  
 REACT(M)-21

FILE: reactm21.dgn	DN: TxDOT	CK: KM	DW: SS	CK: CL
© TxDOT: JULY 2021	CONT: 6421	SECT: 35	JOB: 001	HIGHWAY: US 287, ETC.
REVISIONS	DIST: WFS	COUNTY: MONTAGUE, ETC.	SHEET NO. 60	

LOW MAINTENANCE

DATE: 12/20/2023  
 FILE: \$FILEL\$

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 12/20/2023  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\SMTCN16.dgn

**GENERAL NOTES**


1. FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: WORK AREA PROTECTION, CORP. AT (800) 327-4417, OR (630) 377-9100.
2. FOR BI-DIRECTIONAL TRAFFIC, APPROPRIATE TRANSITION PANELS WILL BE REQUIRED.
3. ADDITIONAL DETAILS FOR THE TRANSITION OPTION AND FOUNDATION OPTION WILL BE SHOWN ON THE MANUFACTURER'S SHOP DRAWINGS FURNISHED TO THE ENGINEER.
4. CONCRETE SHALL BE CLASS "S" WITH A MINIMUM COMPRESSIVE STRENGTH OF 4,000 PSI.
5. MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%.
6. THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
7. THE SCI100GM & SCI70GM SYSTEMS SHOULD BE APPROXIMATELY PARALLEL WITH THE BARRIER OR CENTERLINE OF MERGING BARRIERS.

NOTE:  
 FOR ATTACHMENT AND TRANSITIONS TO OTHER SHAPES, BARRIERS, RAILINGS AND BI-DIRECTIONAL TRAFFIC FLOWS ARE AVAILABLE. (SEE MANUFACTURER'S PRODUCT MANUAL)

NOTE:  
 SIDE PANELS CAN TRAVEL 30" BEYOND THE LAST TERMINAL BRACE AT THE REAR OF THE CUSHION. ALL OBJECTS THAT MAY INTERFERE WITH THIS MOTION CAN AFFECT PERFORMANCE OF AND MAY CAUSE UNDUE DAMAGE TO THE CRASH CUSHION.

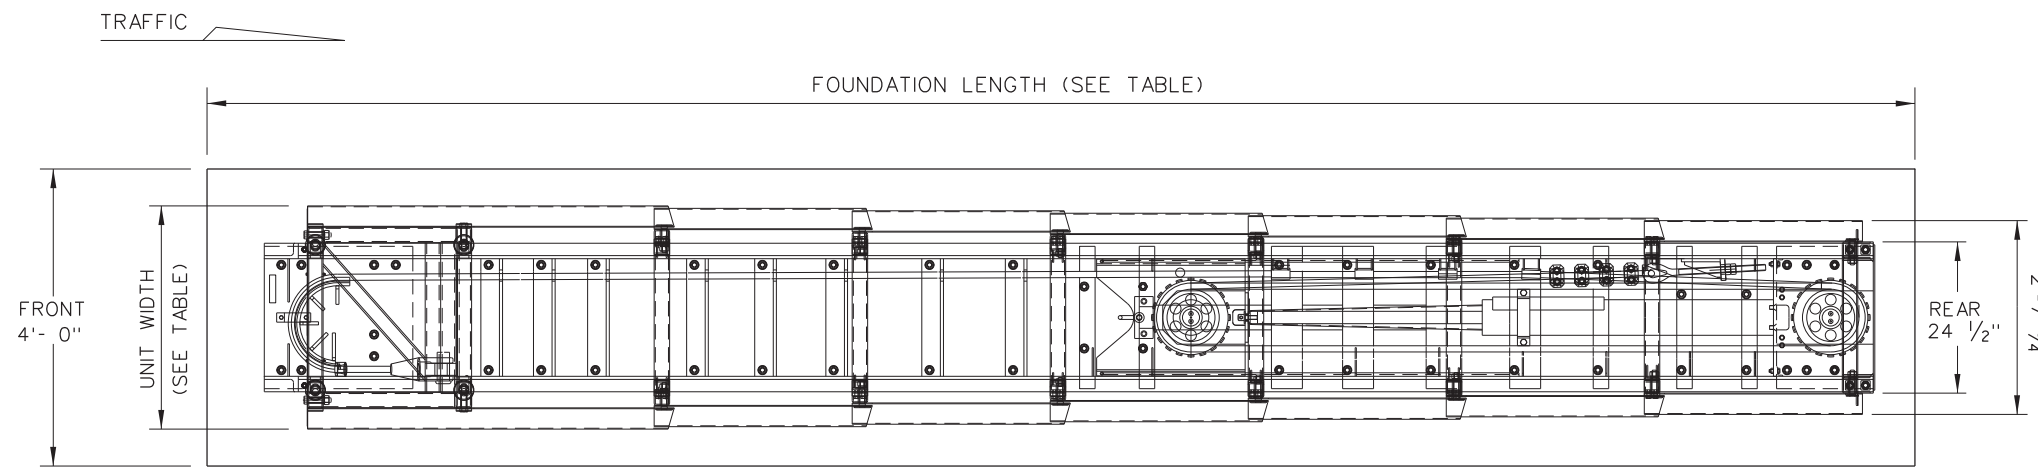

PLAN VIEW

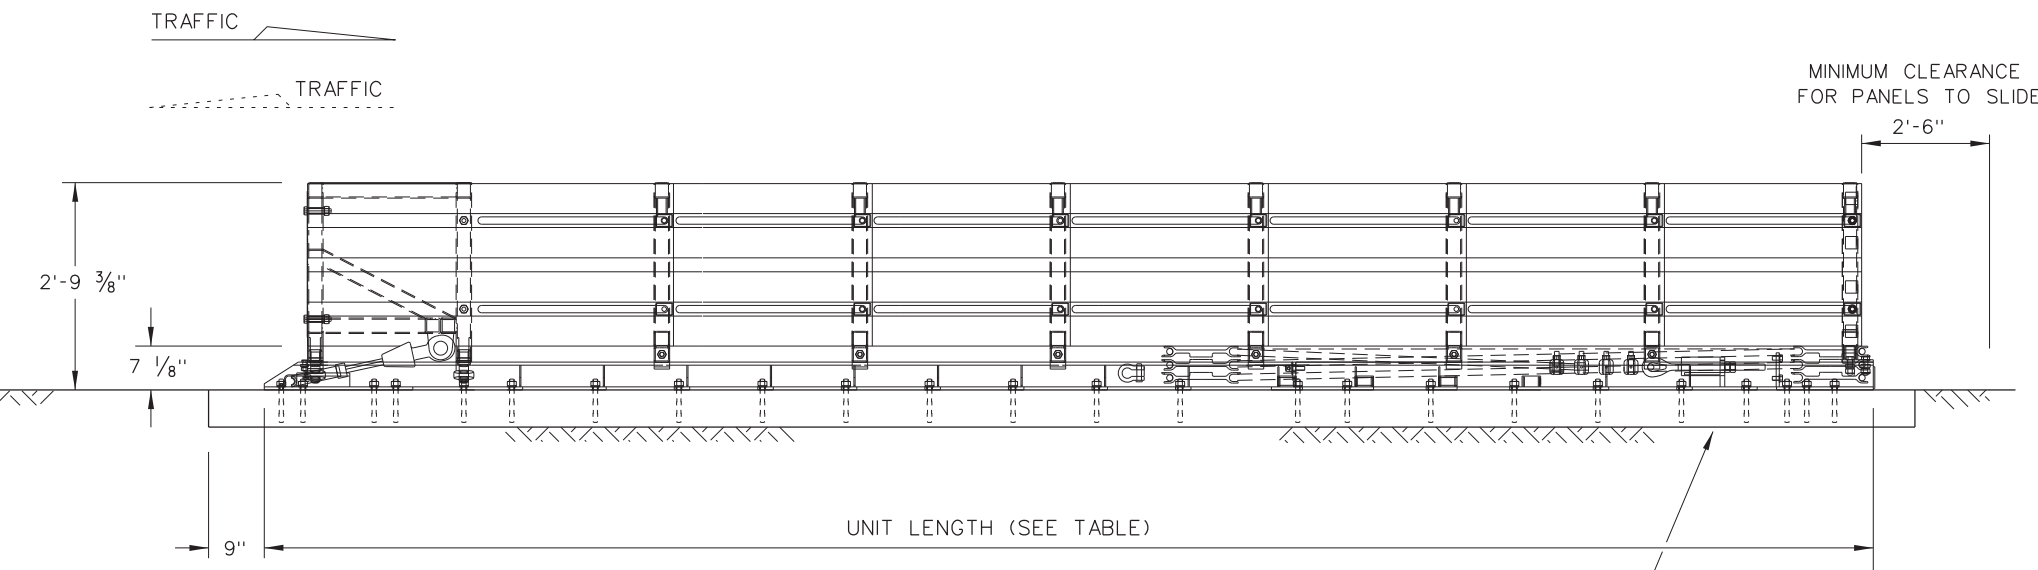

ELEVATION VIEW

MODEL	TEST LEVEL	UNIT LENGTH (approx.)	UNIT WIDTH	FOUNDATION LENGTH	OBSTACLE WIDTH
SCI70GM	TL-2	13'-6"	2'-10 5/8"	15'- 6 1/4"	24"to 36"
SCI100GM	TL-3	21'-6"	3'-1 1/2"	23'- 0"	24"to 36"

SYSTEM AND PAD LENGTHS VARY DEPENDING ON BACKUP TYPE.

FOUNDATION OPTIONS
6" REINFORCED CONCRETE (5 1/2" ANCHOR EMBEDMENT)
8" UNREINFORCED CONCRETE (5 1/2" ANCHOR EMBEDMENT)
3" MIN. ASPHALT OVER 3" MIN. CONCRETE (16 1/2" ANCHOR EMBED.)
6" ASPHALT OVER 6" COMPACT SUBBASE (16 1/2" ANCHOR EMBED.)
8" MINIMUM ASPHALT (16 1/2" ANCHOR EMBEDMENT)

FOR STEEL PLACEMENT IN CONCRETE FOUNDATIONS, SEE MANUFACTURER'S PRODUCT MANUAL.

TRANSITION OPTIONS
CONCRETE VERTICAL WALL
CONCRETE TRAFFIC BARRIERS
GUARDRAIL (W-BEAM)
GUARDRAIL (THRIE-BEAM)

TRANSITION TYPES ARE SHOWN ELSEWHERE ON THE PLANS (I.E. ATTENUATOR LOCATION DETAILS OR IN THE GENERAL NOTES).



FOR BI-DIRECTIONAL TRANSITION PANEL AND END SHOE DETAILS, SEE MANUFACTURER'S PRODUCT MANUAL.

LOW MAINTENANCE

				<b>Design Division Standard</b>	
<b>WORK AREA PROTECTION CORP (SMART-NARROW)</b> <b>SMTCN-16</b>					
FILE: smtcn16.dgn	DN: TxDOT	CK: KM	DW: VP	CK: VP	
©TxDOT: February 2006	CONT	SECT	JOB	HIGHWAY	
REVISIONS	6421	35	001	US 287, ETC.	
REVISED 06, 2013 (VP)	DIST	COUNTY		SHEET NO.	
REVISED 03, 2016 (VP)	WFS	MONTAGUE, ETC.		61	

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.v4 - Design\Master\_Design File\ABSORB(M)-19.dgn

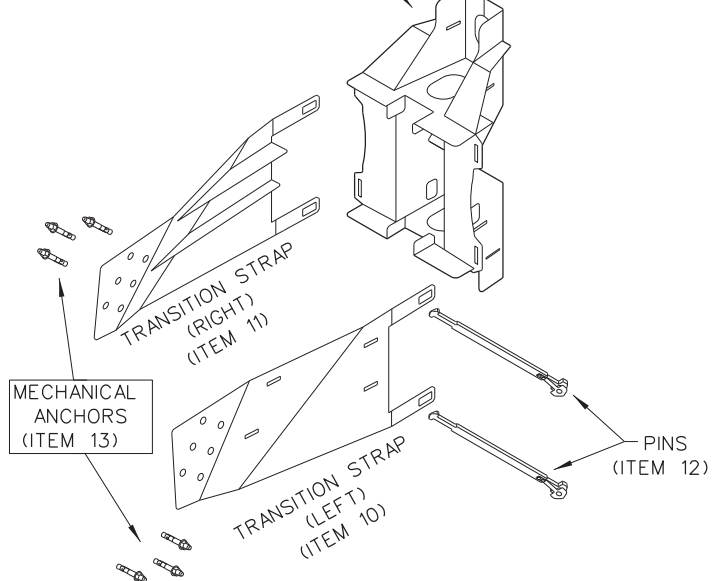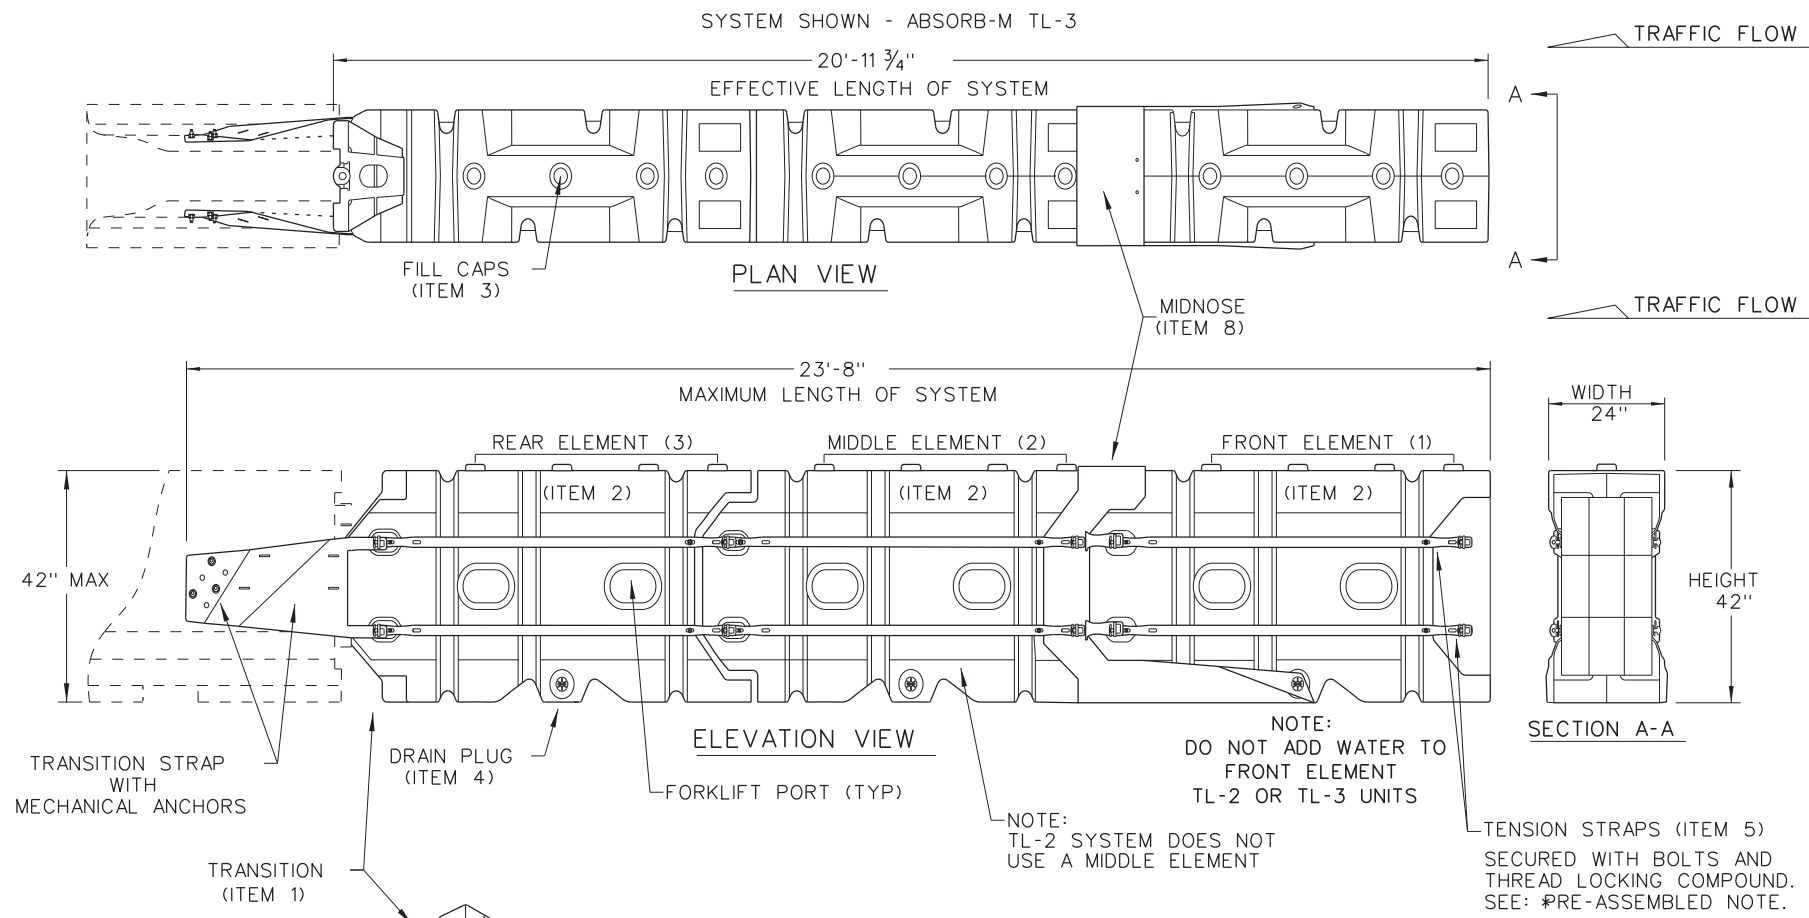


THE ABSORB-M IS A NON-REDIRECTIVE, GATING, CRASH CUSHION DESIGNED TO MEET THE LATEST TL-3 & TL-2 MASH REQUIREMENTS.

THE SYSTEM IS DESIGNED TO ACCOMMODATE A VARIETY OF F-SHAPE AND SINGLE SLOPE CONCRETE BARRIERS. CONTACT THE MANUFACTURER FOR GUIDANCE REGARDING OTHER ALLOWABLE SHAPES.

TEST LEVEL	NUMBER OF ELEMENTS	EFFECTIVE LENGTH	MAXIMUM LENGTH
TL-2	2	14'- 7 3/4"	17'- 4"
TL-3	3	20'- 11 3/4"	23'- 8"

NOTE: CROSS SLOPES OF UP TO 8% (OR 1:12 SLOPE) CAN BE ACCOMMODATED WITH STANDARD HARDWARE SHOWN WITHIN THE INSTRUCTIONS MANUAL. FOR SLOPES WITH EXCESS OF 8% (OR 1:12) CONTACT, LINDSAY TRANSPORTATION SOLUTIONS.

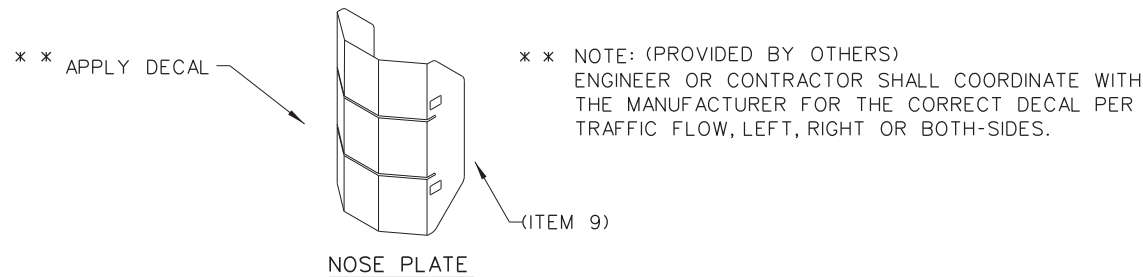


NOTE: APPLY A HIGH REFLECTIVE DECAL TO THE NOSE PLATE. DELINEATION DECAL ORIENTATION IS SHOWN ON THE CONSTRUCTION PLAN SET AND SHALL BE IN ACCORDANCE WITH THE TEXAS MUTCD FOR (TRAFFIC CONTROL DEVICES). DECALS ARE AVAILABLE FOR TRAFFIC FLOW ON THE LEFT-SIDE, BOTH -SIDES AND RIGHT-SIDE.

**GENERAL NOTES**

- FOR SPECIFIC INFORMATION REGARDING THE INSTALLATION AND TECHNICAL GUIDANCE, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800. 180 RIVER ROAD, RIO VISTA, CA 94571
- THE ABSORB-M SYSTEM IS ONLY APPROVED FOR USE IN (TEMPORARY WORK ZONE) LOCATIONS.
- THE ABSORB-M IS A WATER FILLED NON-REDIRECTIVE, GATING CRASH CUSHION THAT DOES NOT NEED TO BE ATTACHED TO A FOUNDATION AND CAN BE INSTALLED ON TOP OF CONCRETE, ASPHALT, OR ANY SURFACE CAPABLE OF BEARING THE WEIGHT OF THE SYSTEM.
- MAXIMUM PERMISSIBLE CROSS-SLOPE IS 8%.
- THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE ABSORB-M SHOULD BE LOCATED APPROXIMATELY PARALLEL WITH THE BARRIER.
- THE USE OF THE ABSORB-M IS RESTRICTED TO A BARRIER HEIGHT OF UP TO 42 INCHES.
- DO NOT ADD WATER TO FRONT ELEMENT (TL-2 OR TL-3 UNIT).

BILL OF MATERIALS (BOM) ABSORB-M TL-3 & TL-2 SYSTEMS			QTY	QTY
ITEM #	PART NUMBER	PART DESCRIPTION	TL-2 SYSTEM	TL-3 SYSTEM
1	BSI-1809036-00	TRANSITION-(GALV)	1	1
2	BSI-1808002-00	PRE-ASSEMBLED ABSORBING (ELEMENTS)	2	3
3	BSI-4004598	FILL CAPS	8	12
4	BSI-4004599	DRAIN PLUGS	2	3
5	BSI-1809053-00	TENSION STRAP-(GALV)	8	12
6	BSI-2001998	C-SCR FH 3/8-16 X 1 1/2 GR5 PLT	8	12
7	BSI-2001999	C-SCR FH 3/8-16 X 1 GR5 PLT	8	12
8	BSI-1809035-00	MIDNOSE -(GALV)	1	1
9	BSI-1808014-00	NOSE PLATE	1	1
10	BSI-1809037-00	TRANSITION STRAP (LEFT-HAND)-(GALV)	1	1
11	BSI-1809038-00	TRANSITION STRAP (RIGHT-HAND)-(GALV)	1	1
12	BSI-1808005-00	PIN ASSEMBLY	8	10
13	BSI-2002001	ANC MECH 5/8-11X5 (GALV)	6	6
14	ABSORB-M	INSTALLATION AND INSTRUCTIONS MANUAL	1	1

\* COMPONENTS PRE-ASSEMBLED WITH ELEMENT ASSEMBLY

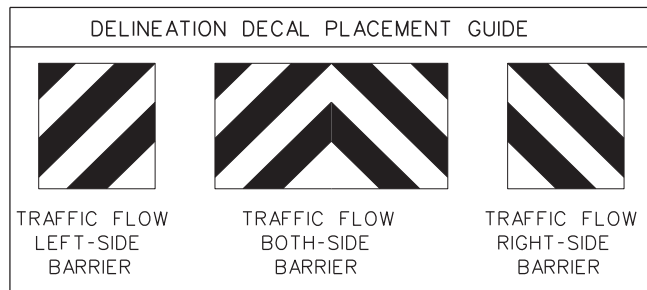

SACRIFICIAL


**Texas Department of Transportation** Design Division Standard

**LINDSAY TRANSPORTATION SOLUTIONS**  
**CRASH CUSHION**  
**(MASH TL-3 & TL-2)**  
**TEMPORARY - WORK ZONE**  
**ABSORB(M)-19**


FILE: absorbm19	DN: TxDOT	CK: KM	DW: VP	CK:
© TXDOT: JULY 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	62	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design File\SLED-19.dgn

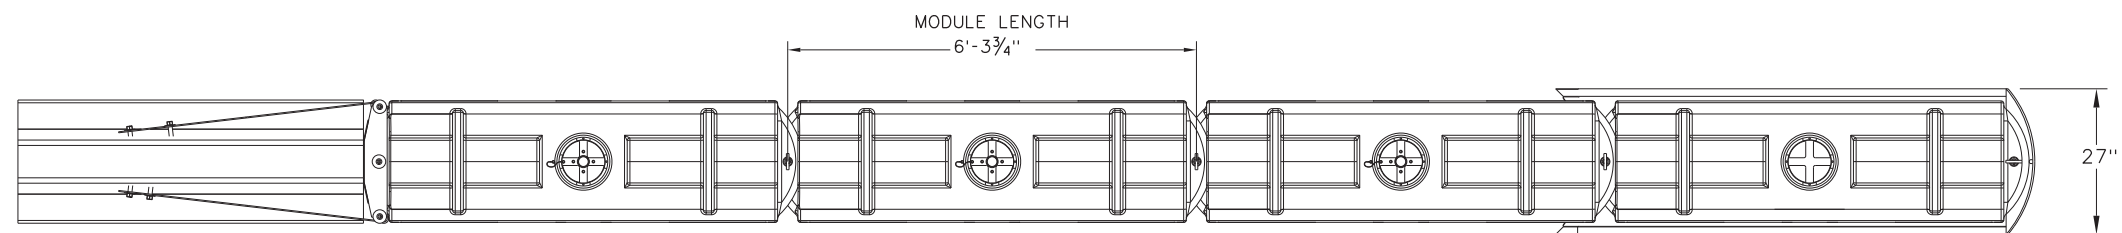

PLAN VIEW

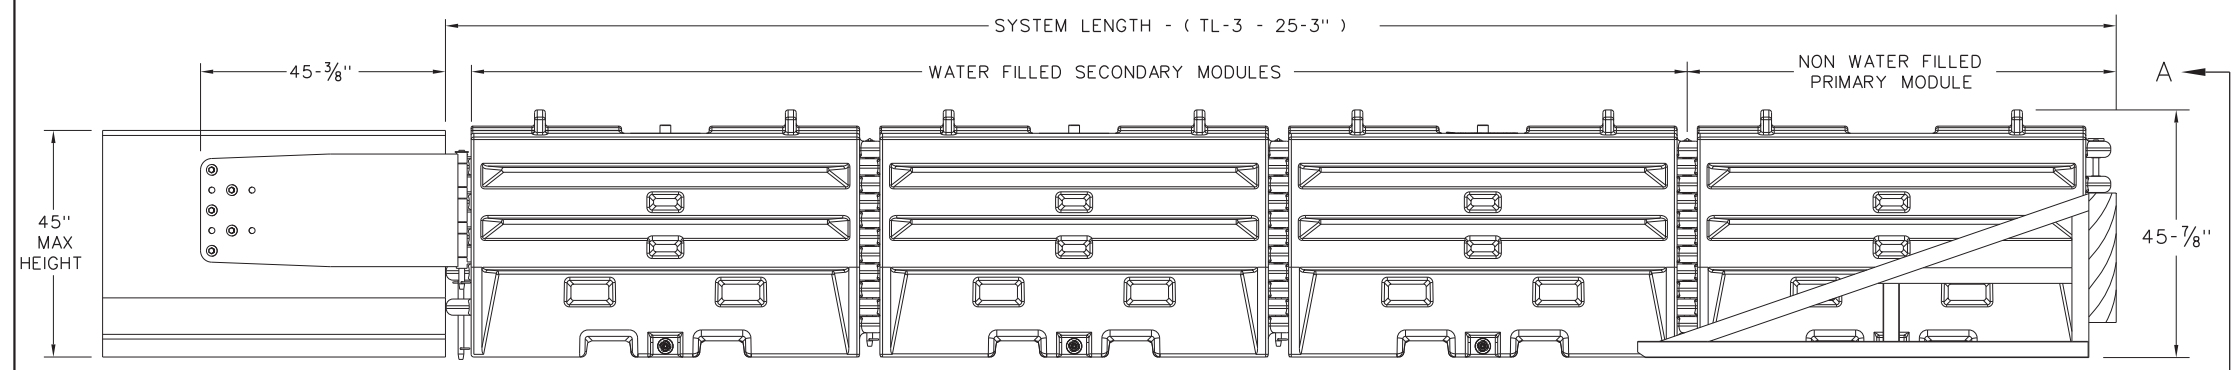

ELEVATION VIEW

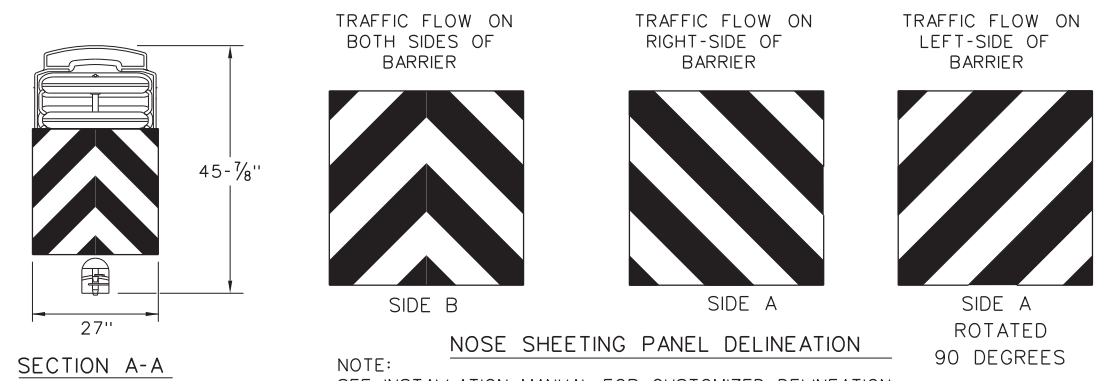

SECTION A-A

NOTE:  
 SEE INSTALLATION MANUAL FOR CUSTOMIZED DELINEATION NOSE SHEETING FOR DECAL PLACEMENT.

TEST LEVEL	NUMBER OF SECONDARY MODULES	SYSTEM LENGTH
TL-3	3	25' 3"


GENERAL NOTES

- REFER TO THE INSTALLATION MANUAL FOR SPECIFIC SYSTEM ASSEMBLY AND MODULE ORIENTATION. FOR ADDITIONAL INFORMATION, CONTACT TRAFFIX, INC. AT (949) 361-5663.
- THE SLED SYSTEM IS A MASH APPROVED TEST LEVEL 3 (TL-3) CRASH CUSHION APPROVED FOR USE IN TEMPORARY WORK ZONES. THE SLED SYSTEM IS A NON-REDIRECTIVE, GATING CRASH CUSHION THAT DOES NOT NEED TO BE ATTACHED TO THE GROUND AND CAN BE INSTALLED ON CONCRETE, ASPHALT, GRAVEL OR COMPACTED SOIL.
- MAXIMUM PERMISSIBLE CROSS SLOPE IS 8° (DEGREES)(14%).
- THE INSTALLATION AREA SHOULD BE FREE FROM CURBS, ELEVATED OBJECTS, OR DEPRESSIONS.
- THE SLED SYSTEM CAN BE ATTACHED TO:

- CONCRETE BARRIER, TEMPORARY OR PERMANENT, 45" MAXIMUM HEIGHT
- STEEL BARRIER
- PLASTIC BARRIER
- CONCRETE BRIDGE ABUTMENTS
- W-BEAM GUARD RAIL
- THRIE BEAM GUARD RAIL

BILL OF MATERIAL		
PART NUMBER	DESCRIPTION	QTY:TL-3
45131	TRANSITION FRAME,GALVANIZED	1
45150	TRANSITION PANEL,GALVANIZED	2
45147-CP	TRANSITION SHORT DROP PIN W/ KEEPER PIN, GALVANIZED	2
45148-CP	TRANSITION LONG DROP PIN W/ KEEPER PIN, GALVANIZED	1
45050	ANCHOR BOLTS	9
12060	WASHER, 3/4" ID X 2" OD	9
45044-Y	SLED YELLOW WATER FILLED MODULE	3
45044-YH	SLED YELLOW "NO FILL" MODULE	1
45044-S	CIS (CONTAINMENT IMPACT SLED), GALVANIZED	1
45043-CP	T-PIN W/ KEEPER PIN	4
18009-B-I	FILL CAP W/ "DRIVE BY" FLOAT INDICATOR	3
45033-RC-B	DRAIN PLUG	3
45032-DPT	DRAIN PLUG REMOVAL TOOL	1

TRANSITION OPTIONS
SLED TRANSITION TO CONCRETE TRAFFIC BARRIER (TEMPORARY OR PERMANENT)
SLED TRANSITION TO STEEL TRAFFIC BARRIER (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO PLASTIC TRAFFIC BARRIER (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO W-BEAM OR THRIE BEAM GUARD RAIL (CONTACT MFGR FOR PROPER TRANSITION)
SLED TRANSITION TO CONCRETE BRIDGE ABUTMENT

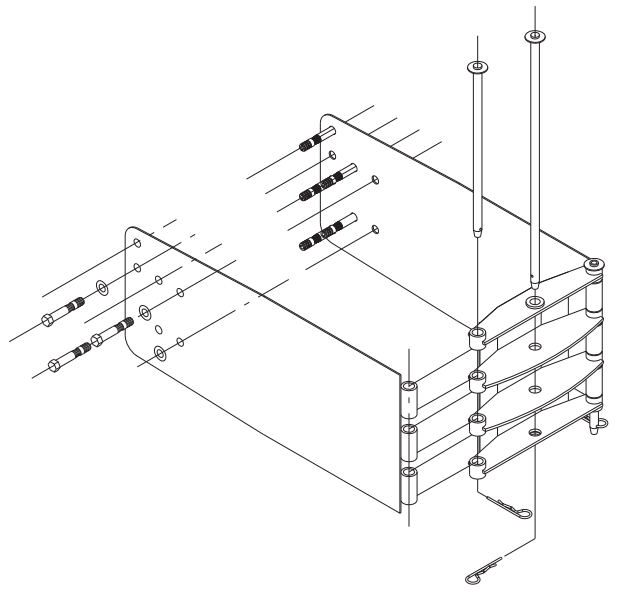

SLED TRANSITION COMPONENTS FOR ATTACHMENT TO CMB

NOTE:  
 SEE MANUFACTURER'S INSTALLATION MANUAL FOR FURTHER DETAILS.

NOTE:  
 THIS STANDARD IS A BASIC REPRESENTATION OF THE SLED, IT IS NOT INTENDED TO REPLACE THE INSTALLATION INSTRUCTIONS MANUAL.


SACRIFICIAL

**Texas Department of Transportation** Design Division Standard


**SLED CRASH CUSHION TL-3 MASH COMPLIANT (TEMPORARY, WORK ZONE) SLED-19**

FILE: sled19.dgn	DN: TxDOT	CK: KM	DW: VP	CK:
© TxDOT: DECEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.		
WFS	MONTAGUE, ETC.	63		

DATE: 12/20/2023 4:40:04 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Master Design F:\e\RL-T2T201TR-19 MOD.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

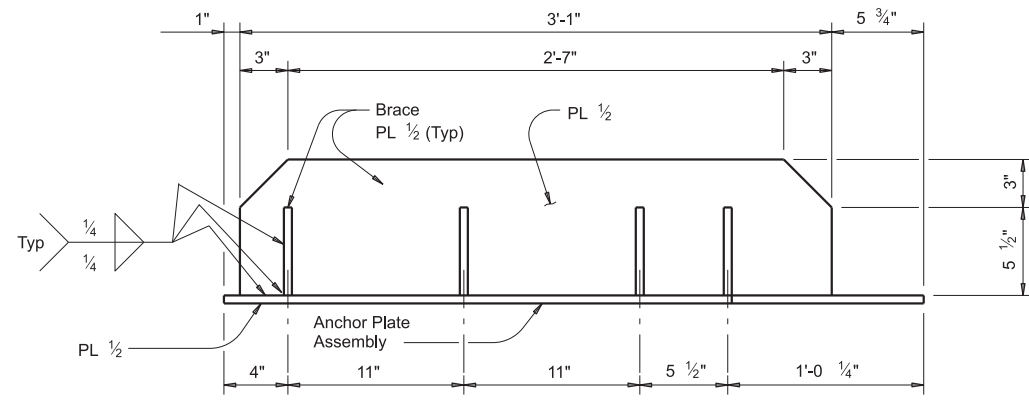


PLAN

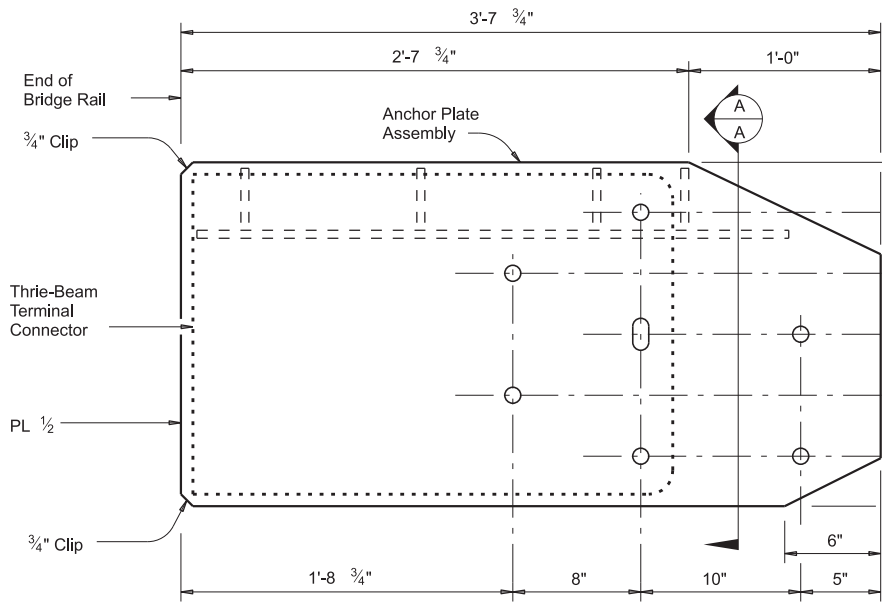


ROADSIDE ELEVATION

**ANCHOR PLATE DETAILS**


Anchor Plate shown is detailed for one end of one side of rail only. For other side, Anchor Plate must be built opposite hand.

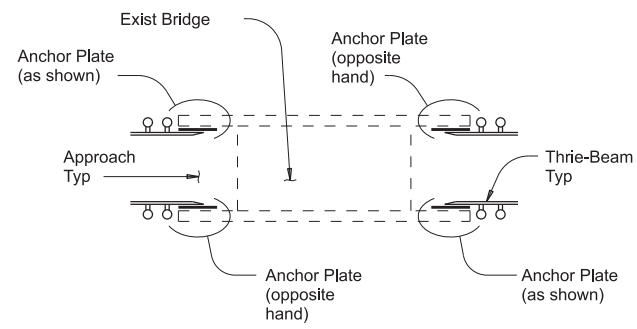

LOCATION DETAILS

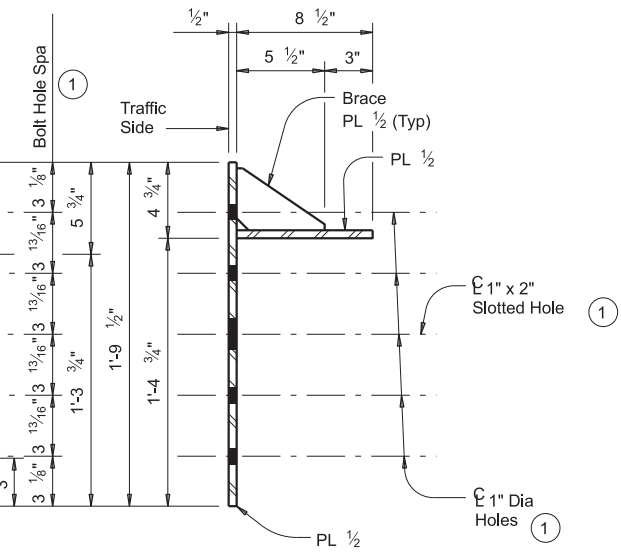

SECTION A-A

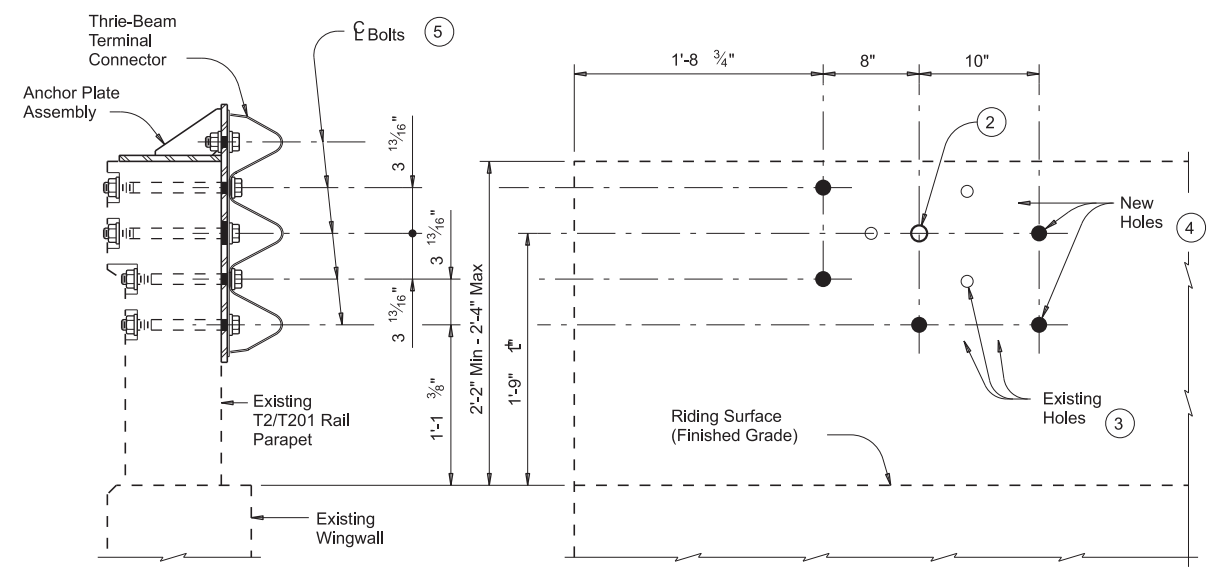


SECTION

Showing completed installation

ROADSIDE ELEVATION

Anchor Plate assembly and Thrie-Beam Terminal Connector not shown for clarity

**THRIE-BEAM TERMINAL CONNECTION DETAILS**

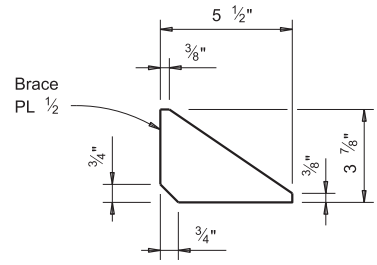

BRACE PLATE DETAIL

**CONSTRUCTION NOTES:**


Field verify dimensions before commencing work and ordering materials.  
 On T2 rail remove any MBGF (W-beam) and attachment hardware, from the face of rail if present, prior to installation of new MBGF Transition. Dispose of these materials as directed by the Engineer. Plugging of newly exposed existing bolt holes is not necessary except as stated here in or otherwise indicated on the plans. This work is considered subsidiary to the pertinent bid items.  
 Attach the MBGF Transition to the existing parapet using the Anchor Plate assembly and the Thrie-Beam Terminal Connection. Splice the Thrie-Beam Terminal Connection and Thrie-Beam with the normal 12 connection bolts. Refer to Metal Beam Guard Fence Transition and Metal Beam Guard Fence detail sheets for additional details and information not shown herein.

**MATERIAL NOTES:**

Fabricate Anchor Plate assembly with steel conforming to either ASTM A36 or A572 Gr 50. Anchor Plate assembly must be free of burrs, sharp edges and weld splatter. Grind edges and corners to a 1/16" flat or radius. Hot-dip galvanize Anchor Plate assembly in accordance with Item 445, "Galvanizing". Anchor bolts, nuts, and washers must conform to Item 449, "Anchor Bolts".

**GENERAL NOTES:**

These details are for retrofitting existing rails only, not new construction, with a Thrie-Beam Terminal Connection. Shop drawings are not required for this installation. Payment for materials, fabrication, and installation of this assembly are to be included in unit price bid in accordance with Item 540 "Mtl Bm Gd Fen Trans (Anchor Plate)". Estimated weight of a single Anchor Plate assembly, including bolts, nuts, and washers, but not including the Thrie-Beam Terminal Connector = 190 Lbs.

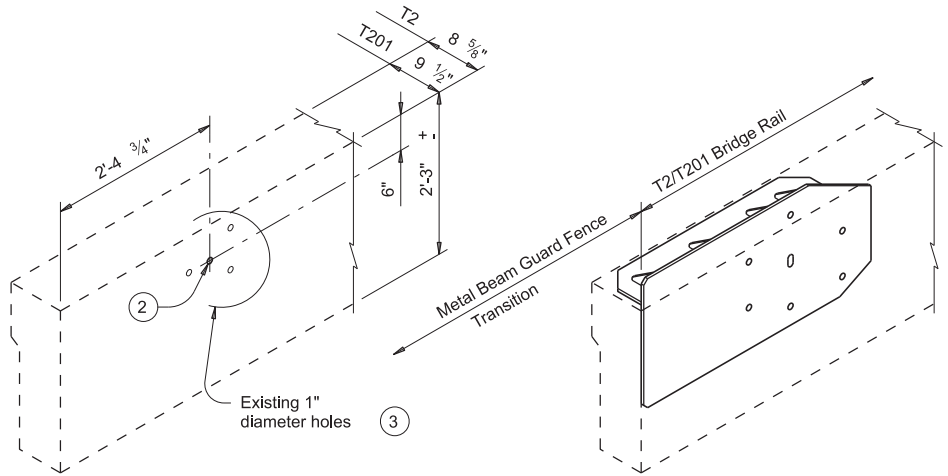

EXISTING PARAPET

Shown after removal of existing MBGF Transition connector and prior to coring new bolt holes


ANCHOR PLATE PLACEMENT

**INSTALLATION DETAILS**

- The Contractor must verify that locations of bolt holes match those in the Thrie-Beam Terminal Connector to be installed in that location, prior to fabrication of Anchor Plate assembly and prior to coring bolt holes in the existing T2/T201 parapet.
- If the existing holes are aligned as expected, use the indicated existing 1" diameter hole in the installation of the Anchor Plate assembly and the Thrie-Beam Terminal Connector.
- If the existing holes are not aligned as expected, holes that cannot be utilized in the installation and are within 3" of a new bolt hole must be filled with epoxy grout prior to coring new holes.
- Drill new 1" diameter holes, each with a 2 1/2" diameter x 1" deep recess, through existing railing parapet. Note that recesses are only required when pedestrian sidewalks are adjacent to back of rail unless directed otherwise by the Engineer. Holes should be perpendicular to the roadside face of the parapet. Drill holes and recesses with coring type equipment. Percussion drilling is not allowed. Patch spalls, when directed by the Engineer, in accordance with Item 429, "Concrete Structure Repair", at the Contractor's expense.
- 7 ~ 7/8" diameter ASTM F3125 Gr A325 Hex Head Anchor Bolts each with 2 ~ 1 3/4" O.D. washers. Place washer under each head and nut. Provide bolts of sufficient length to extend a minimum of 1/2" beyond nut. Cut excess bolt length and paint cut surface with zinc-rich paint if directed by the Engineer.

**BRIDGE LOCATIONS**

REFERENCE #13: NBI# 03-049-0-3308-01-001  
 Coordinates (33.637753, -97.106713)

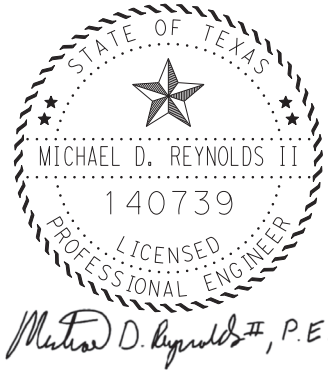

Michael D. Reynolds II, P.E.

12/21/2023




		<b>Bridge Division Standard</b>		
<b>T2/T201 TRANSITION          RETROFIT GUIDE          (ONE TIME USE ONLY)          T2/T201TR (MOD)</b>				
FILE:	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
©TxDOT	September 2019	CONT	SECT	JOB
	REVISIONS	6421	35	001 US 287, ETC.
		DIST	COUNTY	SHEET NO.
		WFS	MONTAGUE, ETC.	64





DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to metric units. Design: MBG/COO, Date: 12/20/2023 4:40:06 PM

FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\MBG\6421-35-001\6421-35-001\6421-35-001.dwg

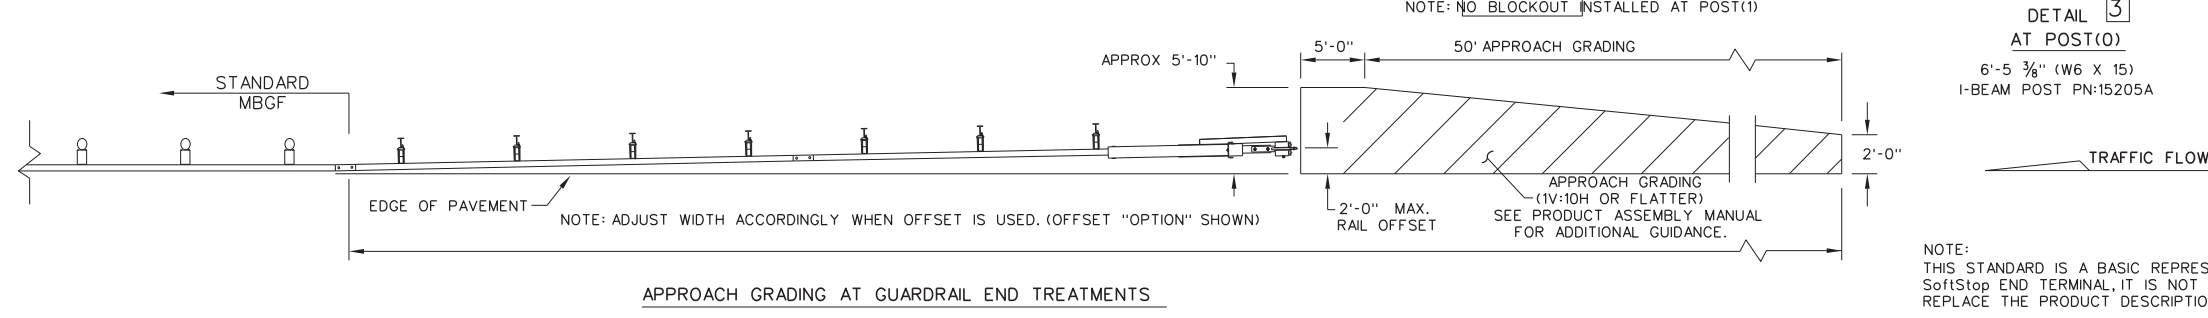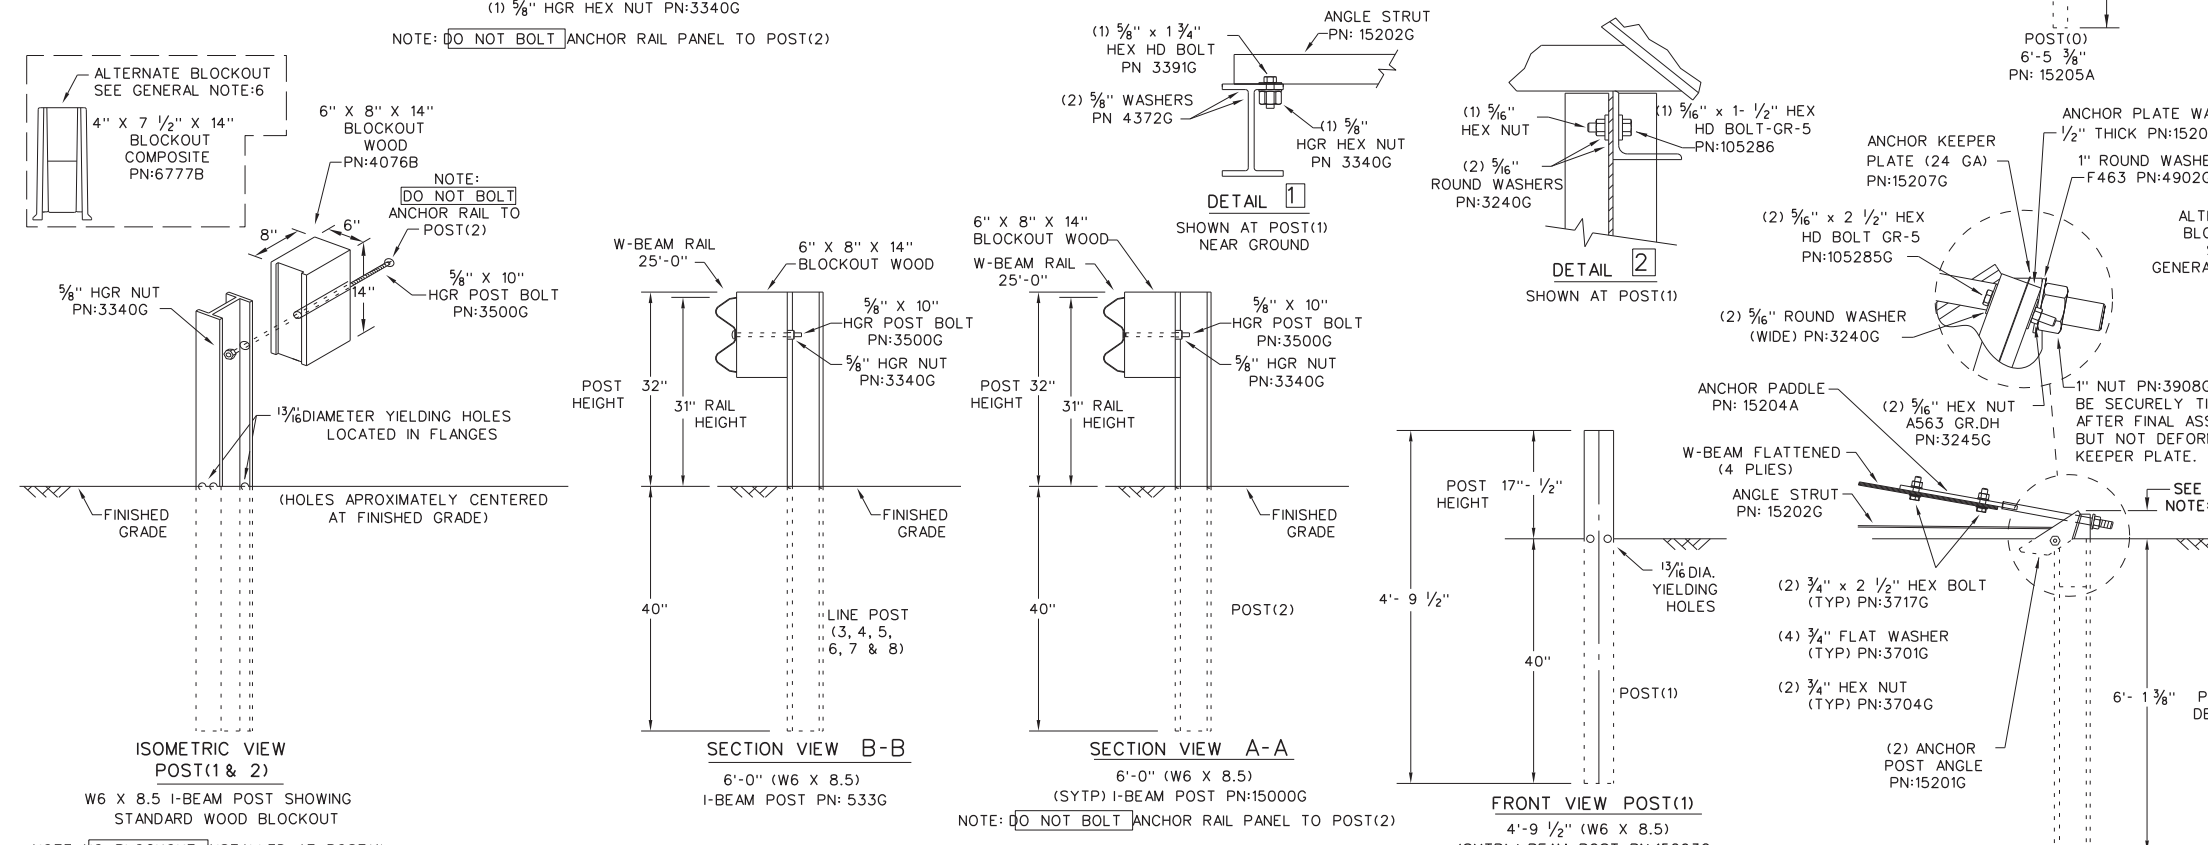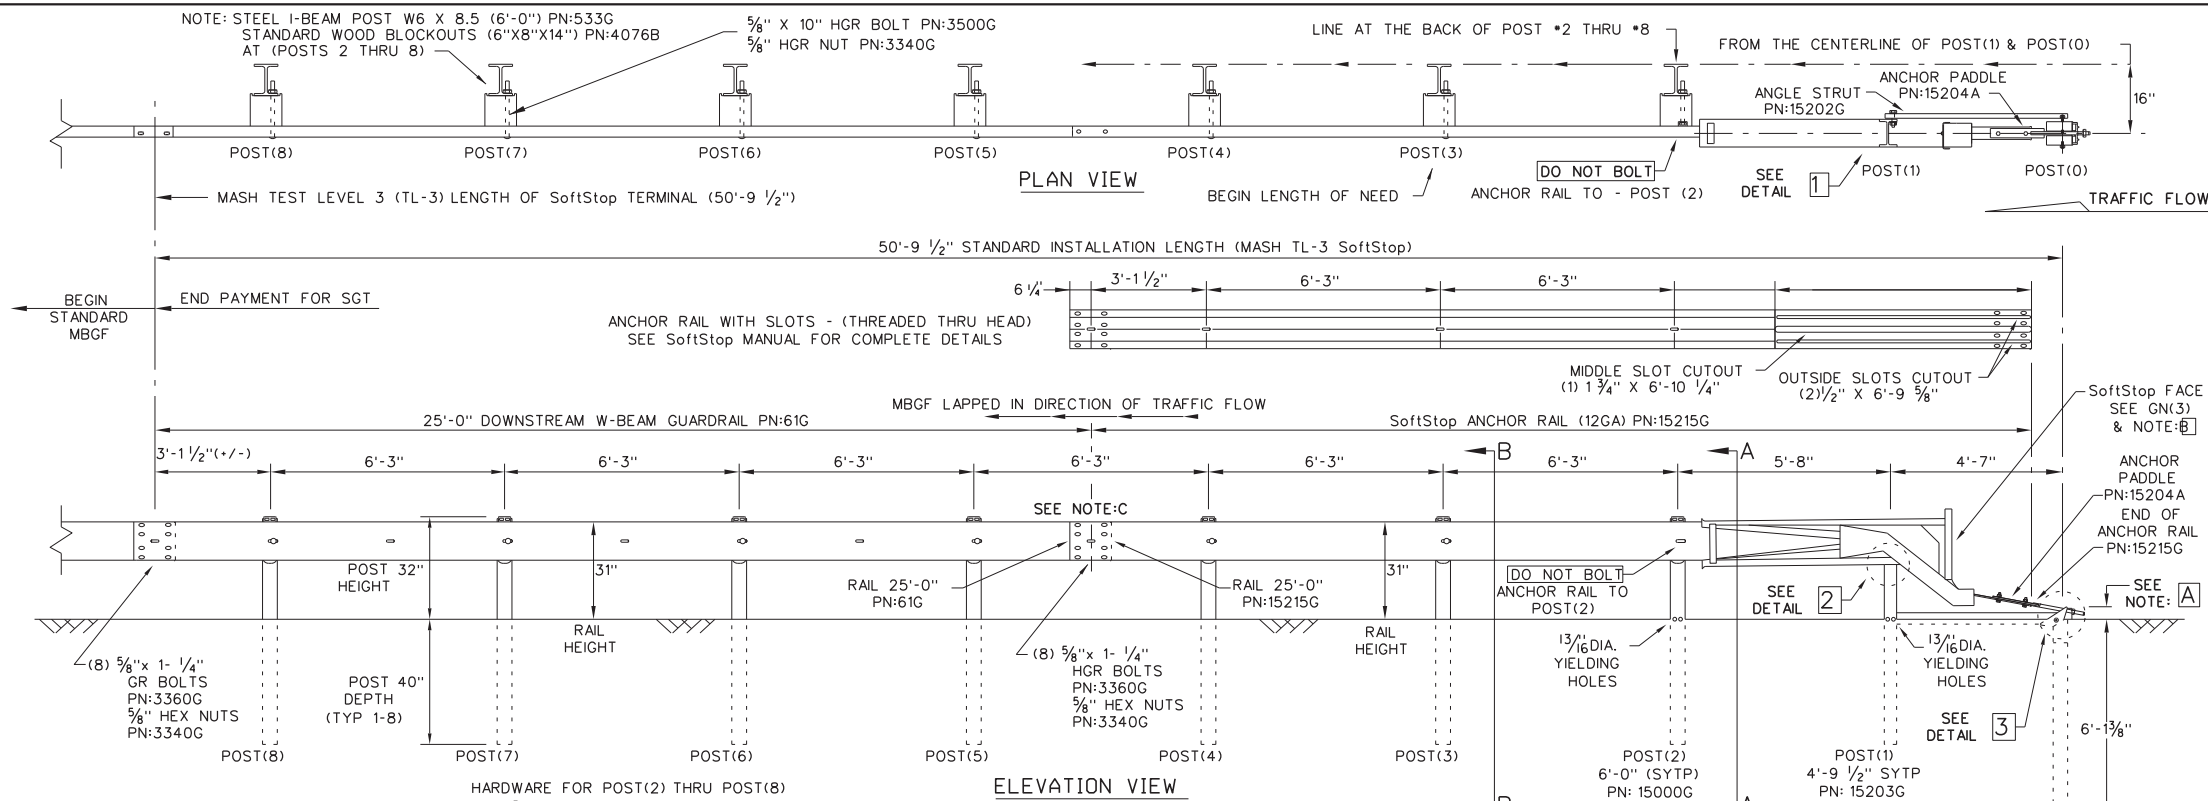

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: TRINITY HIGHWAY AT 1(888)323-6374. 2525 N. STEMMONS FREEWAY, DALLAS, TX 75207
  - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: SoftStop END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL. PN:620237B
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TxDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
  - A COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
  - IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL AND REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - IT IS ACCEPTABLE TO INSTALL THE SoftStop IMPACT HEAD PARALLEL TO THE GRADE LINE OR WITH AN UPWARD TILT.
  - DO NOT ATTACH THE SoftStop SYSTEM DIRECTLY TO A RIGID BARRIER.
  - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE SoftStop SYSTEM BE CURVED.
  - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRoaching ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.

NOTE:A	THE INSTALLATION HEIGHT OF FULLY ASSEMBLED ANCHOR POST WILL VARY FROM 3'-3/4" MIN. TO 4" MAX. ABOVE FINISHED GRADE.
NOTE:B	PART PN:5852B RIGHT-SIDE (HIGH INTENSITY REFLECTIVE SHEETING) PART PN:5851B LEFT-SIDE (HIGH INTENSITY REFLECTIVE SHEETING)
NOTE:C	W-BEAM SPLICE LOCATED BETWEEN LINE POST(4) AND LINE POST(5) GUARDRAIL PANEL 25'-0" PN:61G ANCHOR RAIL 25'-0" PN:15215G LAP GUARDRAIL IN DIRECTION OF TRAFFIC FLOW.

PART	QTY	MAIN SYSTEM COMPONENTS
620237B	1	PRODUCT DESCRIPTION ASSEMBLY MANUAL (LATEST REV.)
15208A	1	SoftStop HEAD (SEE MANUAL FOR RIGHT-LEFT APPROACH)
15215G	1	SoftStop ANCHOR RAIL (12GA) WITH CUTOUT SLOTS
61G	1	SoftStop DOWNSTREAM W-BEAM RAIL (12GA) (25'-0")
15205A	1	POST *0 - ANCHOR POST (6'-5 7/8")
15203G	1	POST *1 - (SYTP) (4'-9 1/2")
15000G	1	POST *2 - (SYTP) (6'-0")
533G	6	POST *3 THRU *8 - I-BEAM (W6 x 8.5) (6'-0")
4076B	7	BLOCKOUT - WOOD (ROUTED) (6" x 8" x 14")
6777B	7	BLOCKOUT - COMPOSITE (4" x 7 1/2" x 14")
15204A	1	ANCHOR PADDLE
15207G	1	ANCHOR KEEPER PLATE (24 GA)
15206G	1	ANCHOR PLATE WASHER (1/2" THICK)
15201G	2	ANCHOR POST ANGLE (10" LONG)
15202G	1	ANGLE STRUT
HARDWARE		
4902G	1	1" ROUND WASHER F436
3908G	1	1" HEAVY HEX NUT A563 GR.DH
3717G	2	3/4" x 2 1/2" HEX BOLT A325
3701G	4	3/4" ROUND WASHER F436
3704G	2	3/4" HEAVY HEX NUT A563 GR.DH
3360G	16	5/8" x 1 1/4" W-BEAM RAIL SPLICE BOLTS HGR
3340G	25	5/8" W-BEAM RAIL SPLICE NUTS HGR
3500G	7	5/8" x 10" HGR POST BOLT A307
3391G	1	5/8" x 1 3/4" HEX HD BOLT A325
4489G	1	5/8" x 9" HEX HD BOLT A325
4372G	4	5/8" WASHER F436
105285G	2	5/16" x 2 1/2" HEX HD BOLT GR-5
105286G	1	5/16" x 1 1/2" HEX HD BOLT GR-5
3240G	6	5/16" ROUND WASHER (WIDE)
3245G	3	5/16" HEX NUT A563 GR.DH
5852B	1	HIGH INTENSITY REFLECTIVE SHEETING - SEE NOTE:B

**Texas Department of Transportation**  
Design Division Standard








**TRINITY HIGHWAY  
SOFTSTOP END TERMINAL  
MASH - TL-3  
SGT(10S)31-16**

FILE: sgt10s3116	DN: TxDOT	CK: KM	DW: VP	CK: MB/VP
©TxDOT: JULY 2016	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	66	

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE SoftStop END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this standard. The user of this standard shall be responsible for the accuracy of the information contained herein.

DATE: 12/20/2023  
 FILE: T:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024-4 - Design\MBGF.dwg

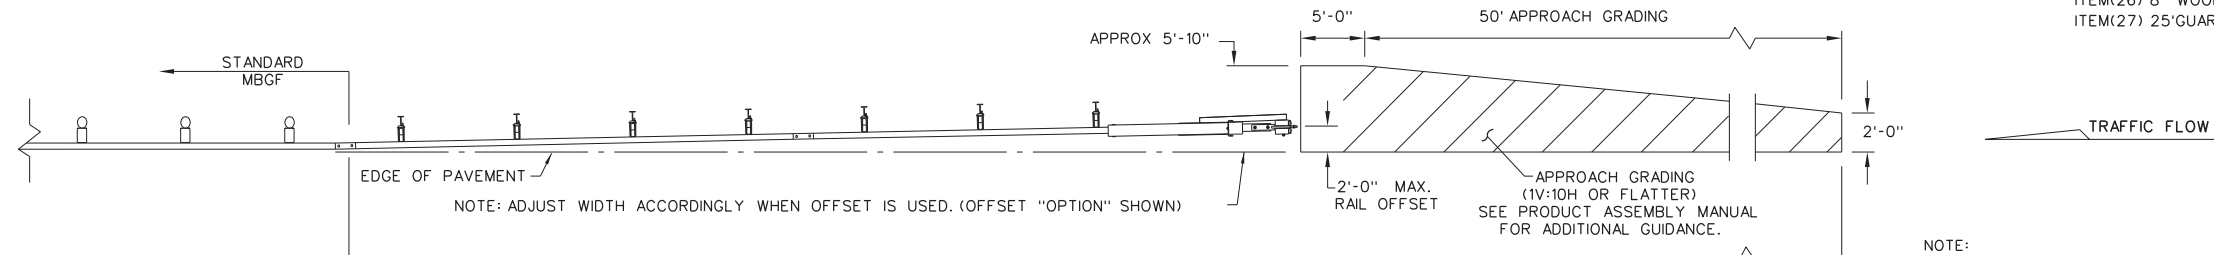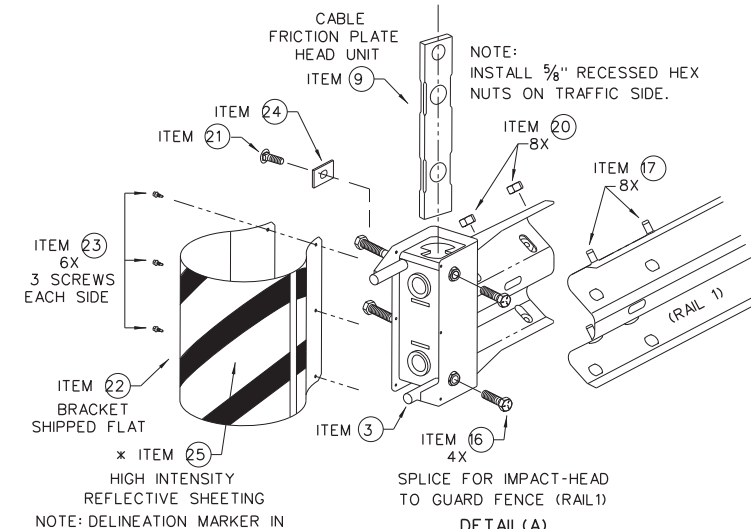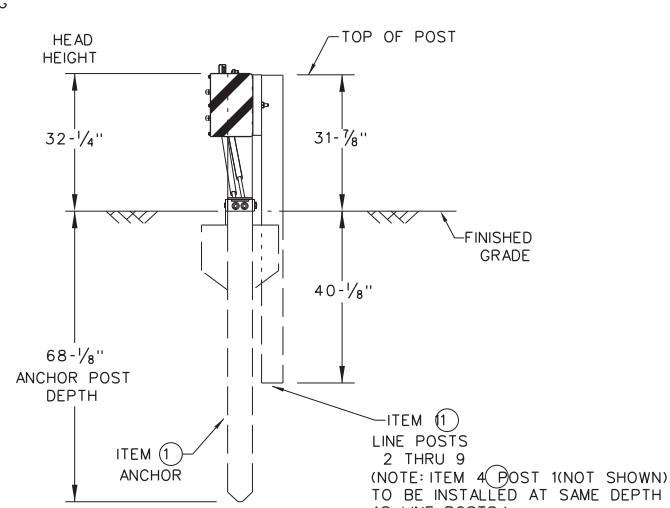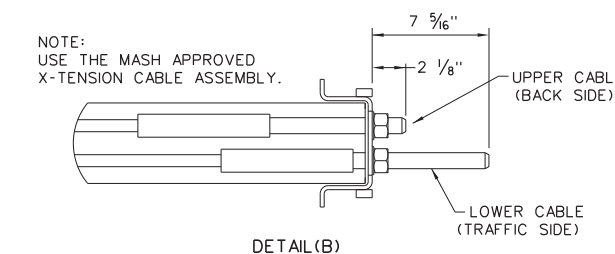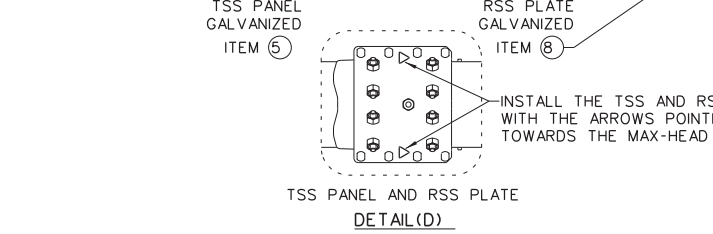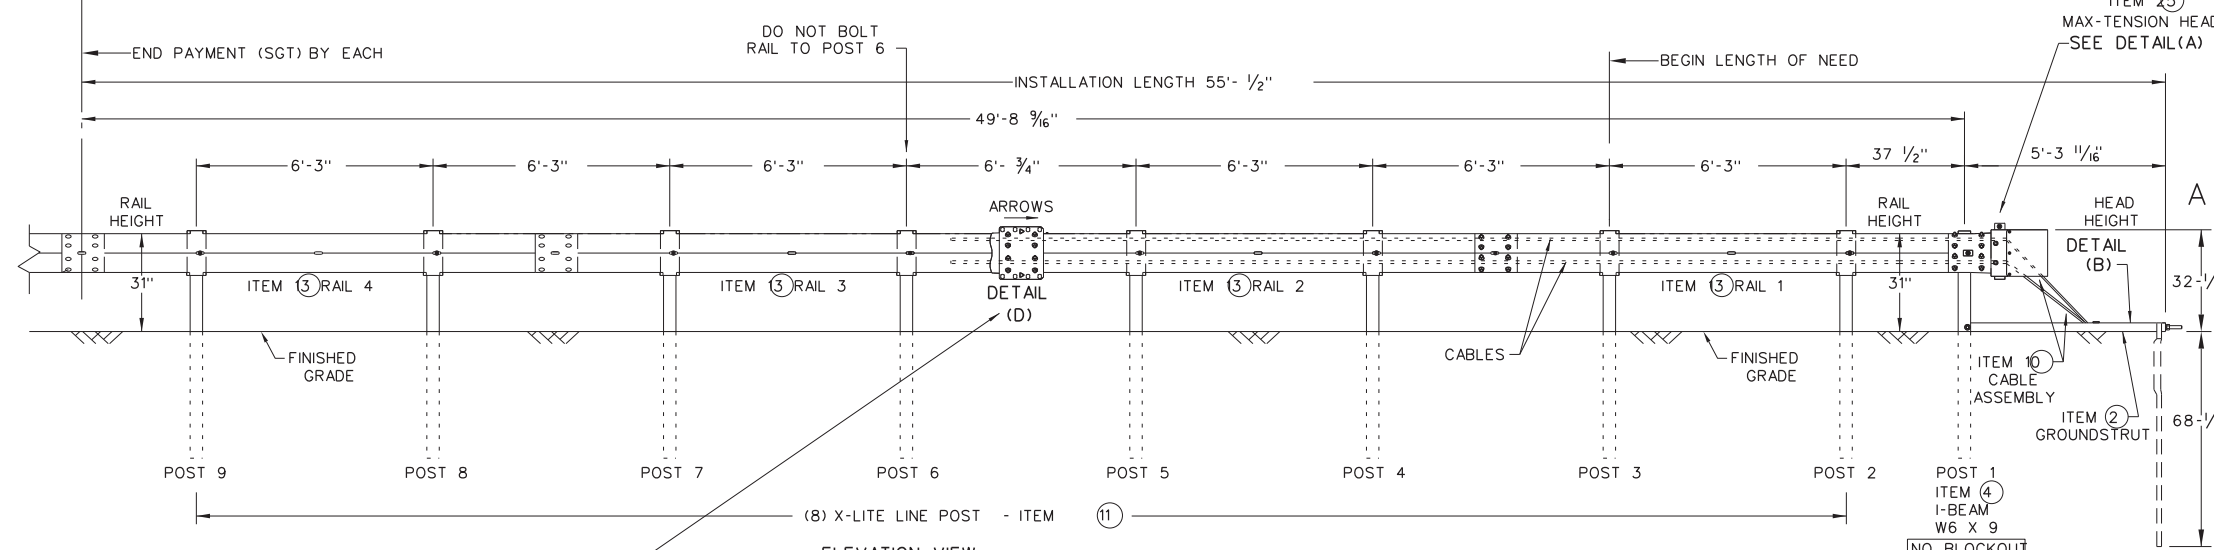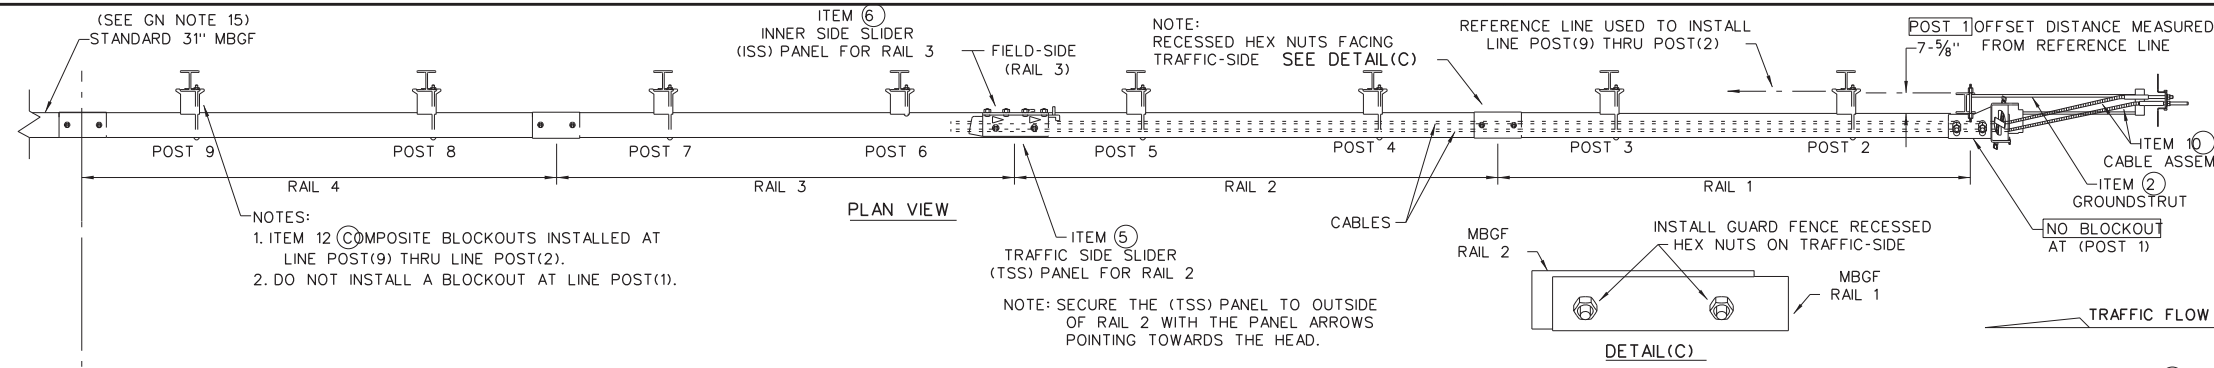

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: LINDSAY TRANSPORTATION SOLUTIONS (LTS) - BARRIER SYSTEMS, INC. AT (707) 374-6800
  - FOR INSTALLATION, REPAIR, & MAINTENANCE REFER TO THE: MAX-TENSION INSTALLATION INSTRUCTION MANUAL. P/N MANMAX REV D (ECN 3516).
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TxDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - ALL STEEL COMPONENTS ARE GALVANIZED PER ASTM A123 OR EQUIVALENT UNLESS OTHERWISE STATED.
  - SYSTEM SHOWN USING STEEL WIDE FLANGE POST WITH COMPOSITE BLOCKOUTS.
  - COMPOSITE MATERIAL BLOCKOUT THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
  - REFER TO INSTALLATION MANUAL FOR SPECIFIC PANEL LAPPING GUIDANCE.
  - IF SOLID ROCK IS ENCOUNTERED SEE THE MANUFACTURER'S INSTALLATION MANUAL FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POST TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST.
  - MAX-TENSION SYSTEM SHALL NEVER BE INSTALLED WITHIN A CURVED SECTION OF GUARDRAIL.
  - IF A DELINEATION MARKER IS REQUIRED, MARKER SHALL BE IN ACCORDANCE WITH TEXAS MUTCD.
  - THE SYSTEM IS SHOWN WITH 12'-6" MBGF PANELS, 25'-0" MBGF PANELS ARE ALSO ALLOWED.
  - A MINIMUM OF 12'-6" OF 12GA. MBGF IS REQUIRED IMMEDIATELY DOWNSTREAM OF THE MAX-TENSION SYSTEM.

ITEM #	PART NUMBER	DESCRIPTION	QTY
1	BSI-1610060-00	SOIL ANCHOR - GALVANIZED	1
2	BSI-1610061-00	GROUND STRUT - GALVANIZED	1
3	BSI-1610062-00	MAX-TENSION IMPACT HEAD	1
4	BSI-1610063-00	W6x9 I-BEAM POST 6FT.-GALVANIZED	1
5	BSI-1610064-00	TSS PANEL - TRAFFIC SIDE SLIDER	1
6	BSI-1610065-00	ISS PANEL - INNER SIDE SLIDER	1
7	BSI-1610066-00	TOOTH - GEOMET	1
8	BSI-1610067-00	RSS PLATE - REAR SIDE SLIDER	1
9	B061058	CABLE FRICTION PLATE - HEAD UNIT	1
10	BSI-1610069-00	CABLE ASSEMBLY - MASH X-TENSION	2
11	BSI-1012078-00	X-LITE LINE POST - GALVANIZED	8
12	B090534	8" W-BEAM COMPOSITE-BLOCKOUT XT110	8
13	BSI-4004386	12'-6" W-BEAM GUARD FENCE PANELS 12GA.	4
14	BSI-1102027-00	X-LITE SQUARE WASHER	1
15	BSI-2001886	5/8" X 7" THREAD BOLT HH (GR.5)GEOMET	1
16	BSI-2001885	3/4" X 3" ALL-THREAD BOLT HH (GR.5)GEOMET	4
17	4001115	5/8" X 1 1/4" GUARD FENCE BOLTS (GR.2)MGAL	48
18	2001840	5/8" X 10" GUARD FENCE BOLTS MGAL	8
19	2001636	5/8" WASHER F436 STRUCTURAL MGAL	2
20	4001116	5/8" RECESSED GUARD FENCE NUT (GR.2)MGAL	59
21	BSI-2001888	5/8" X 2" ALL THREAD BOLT (GR.5)GEOMET	1
22	BSI-1701063-00	DELINEATION MOUNTING (BRACKET)	1
23	BSI-2001887	1/4" X 3/4" SCREW SD HH 410SS	7
24	4002051	GUARDRAIL WASHER RECT AASHTO FWR03	1
25	SEE NOTE BELOW	HIGH INTENSITY REFLECTIVE SHEETING	1
26	4002337	8" W-BEAM TIMBER-BLOCKOUT, PDB01B	8
27	BSI-4004431	25' W-BEAM GUARDRAIL PANEL, 8-SPACE, 12GA.	2
28	MANMAX Rev-(D)	MAX-TENSION INSTALLATION INSTRUCTIONS	1


\* TO BE PROVIDED BY DISTRIBUTOR OR CONTRACTOR.  
 \*\* ALTERNATIVE ITEMS NOT SHOWN. ITEM(26) 8" WOOD-BLOCKOUTS ITEM(27) 25' GUARD FENCE PANELS

**Texas Department of Transportation**  
**Design Division Standard**

**MAX-TENSION END TERMINAL**  
**MASH - TL-3**  
**SGT(11S)31-18**



FILE: sgt11s3118.dgn	DN: TxDOT	CK: KM	DW: TxDOT	CK: CL
© TxDOT: FEBRUARY 2018	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	67	

DATE: 12/20/2023  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001\_MBGF\_Cooke\_FY2024.4 - Design\Master\_Design\_File\SGT(12S)31-18.dgn  
 DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

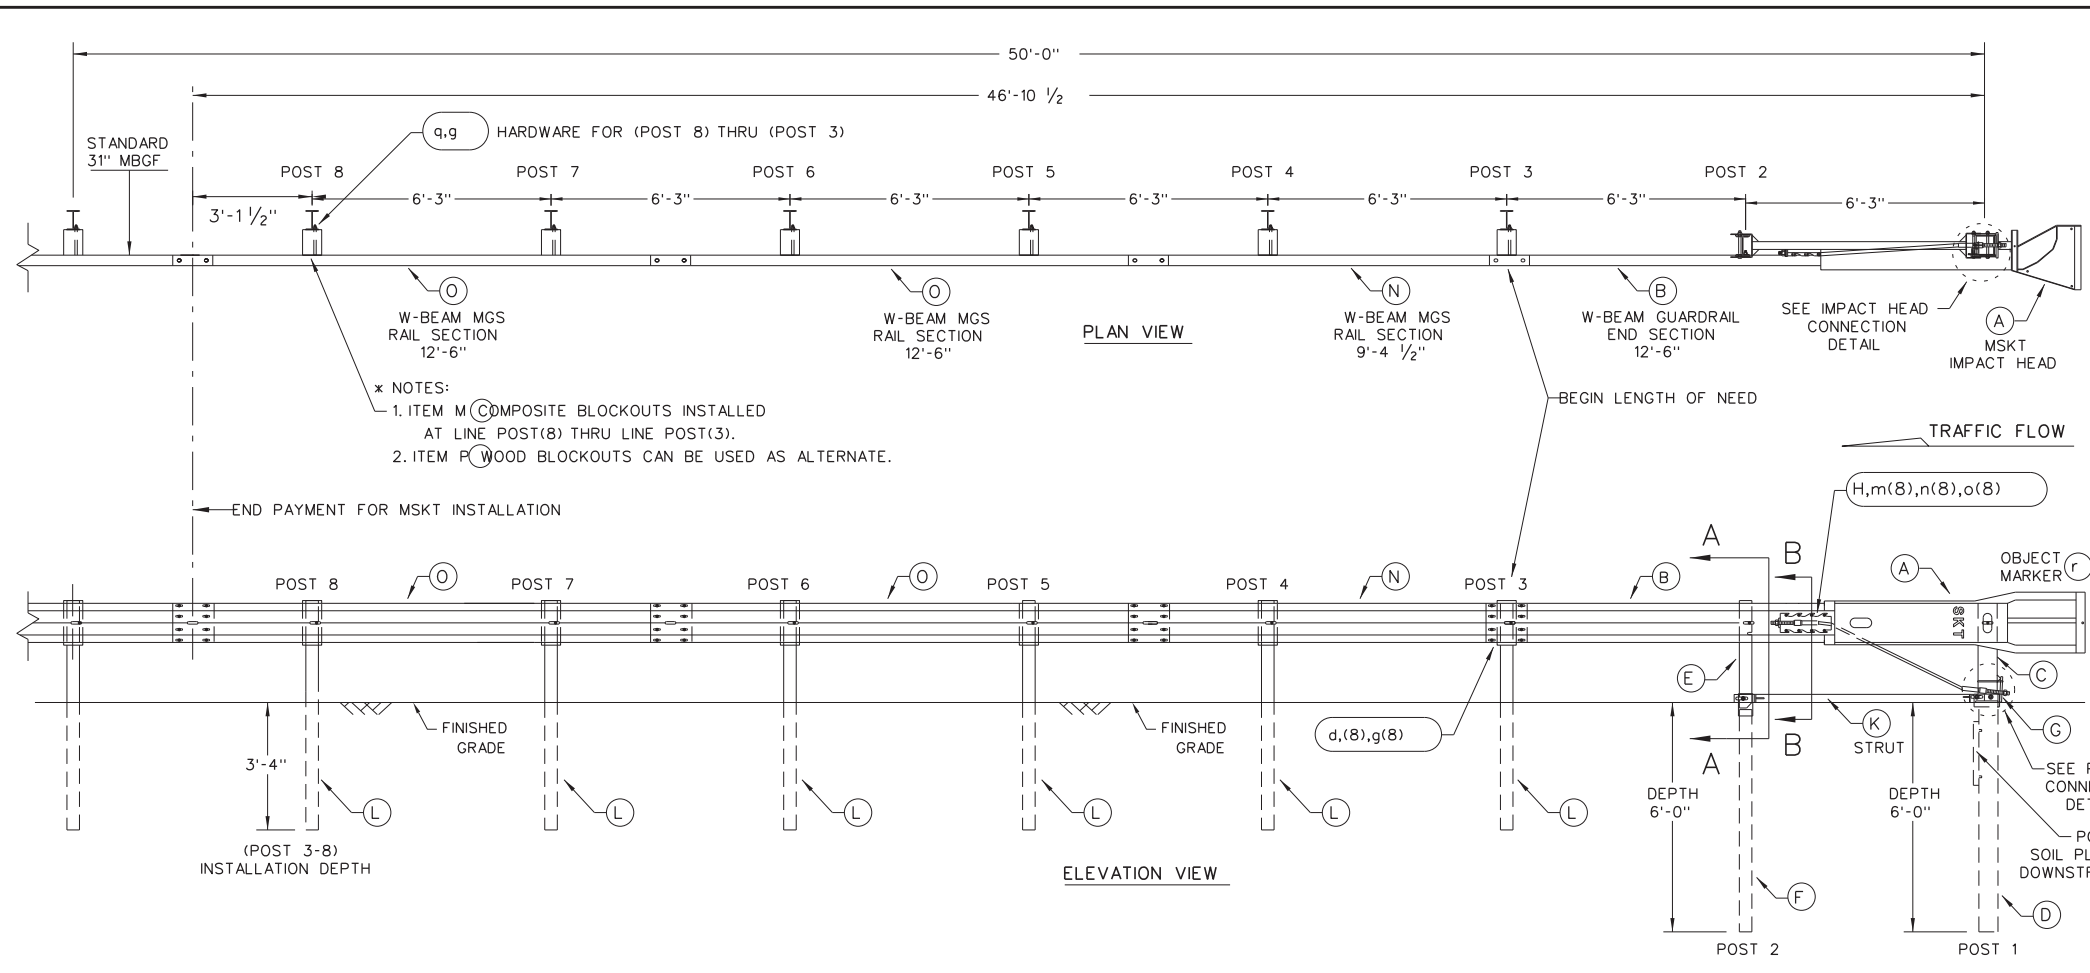

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
  - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
  - SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
  - A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
  - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - SYSTEM MUST BE ATTACHED TO STANDARD 31" MBGF.
  - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
  - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCROACHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
  - THE SYSTEM IS SHOWN WITH TWO 12'-6" MBGF PANELS, ONE 25'-0" MBGF PANEL IS ALSO ALLOWED IN THEIR PLACE.
  - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM NUMBERS
A	1	MSKT IMPACT HEAD	MS3000
B	1	W-BEAM GUARDRAIL END SECTION, 12 Go.	SF1303
C	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
D	1	POST 1 - BOTTOM (6" W6X15)	MTPHP1B
E	1	POST 2 - ASSEMBLY TOP	UHP2A
F	1	POST 2 - ASSEMBLY BOTTOM (6" W6X9)	HP2B
G	1	BEARING PLATE	E750
H	1	CABLE ANCHOR BOX	S760
J	1	BCT CABLE ANCHOR ASSEMBLY	E770
K	1	GROUND STRUT	MS785
L	6	W6x9 OR W6x8.5 STEEL POST	P621
M	6	COMPOSITE BLOCKOUTS	CBSP-14
N	1	W-BEAM MGS RAIL SECTION (9'-4 1/2")	G12025
O	2	W-BEAM MGS RAIL SECTION (12'-6")	G1203A
P	6	WOOD BLOCKOUT 6" X 8" X 14"	P675
Q	1	W-BEAM MGS RAIL SECTION (25'-0")	G1209
SMALL HARDWARE			
a	2	5/16" x 1" HEX BOLT (GRD 5)	B5160104A
b	4	5/16" WASHER	W0516
c	2	5/16" HEX NUT	N0516
d	25	5/8" Dia. x 1 1/4" SPLICE BOLT (POST 2)	B580122
e	2	5/8" Dia. x 9" HEX BOLT (GRD A449)	B580904A
f	3	5/8" WASHER	W050
g	33	5/8" Dia. H.G.R NUT	N050
h	1	3/4" Dia. x 8 1/2" HEX BOLT (GRD A449)	B340854A
j	1	3/4" Dia. HEX NUT	N030
k	2	1 ANCHOR CABLE HEX NUT	N100
l	2	1 ANCHOR CABLE WASHER	W100
m	8	1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER	SB12A
n	8	1/2" STRUCTURAL NUTS	N012A
o	8	1 1/16" O.D. x 3/16" I.D. STRUCTURAL WASHERS	W012A
p	1	BEARING PLATE RETAINER TIE	CT-100ST
q	6	5/8" x 10" H.G.R. BOLT	B581002
r	1	OBJECT MARKER 18" X 18"	E3151

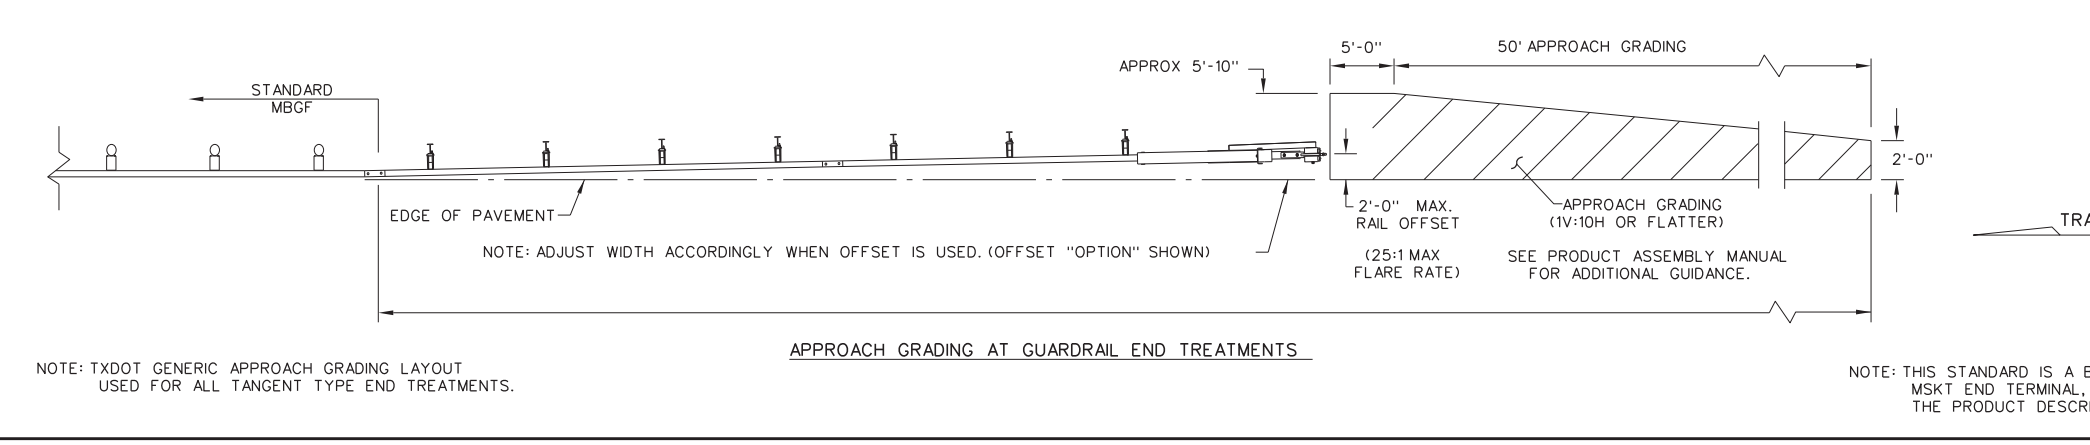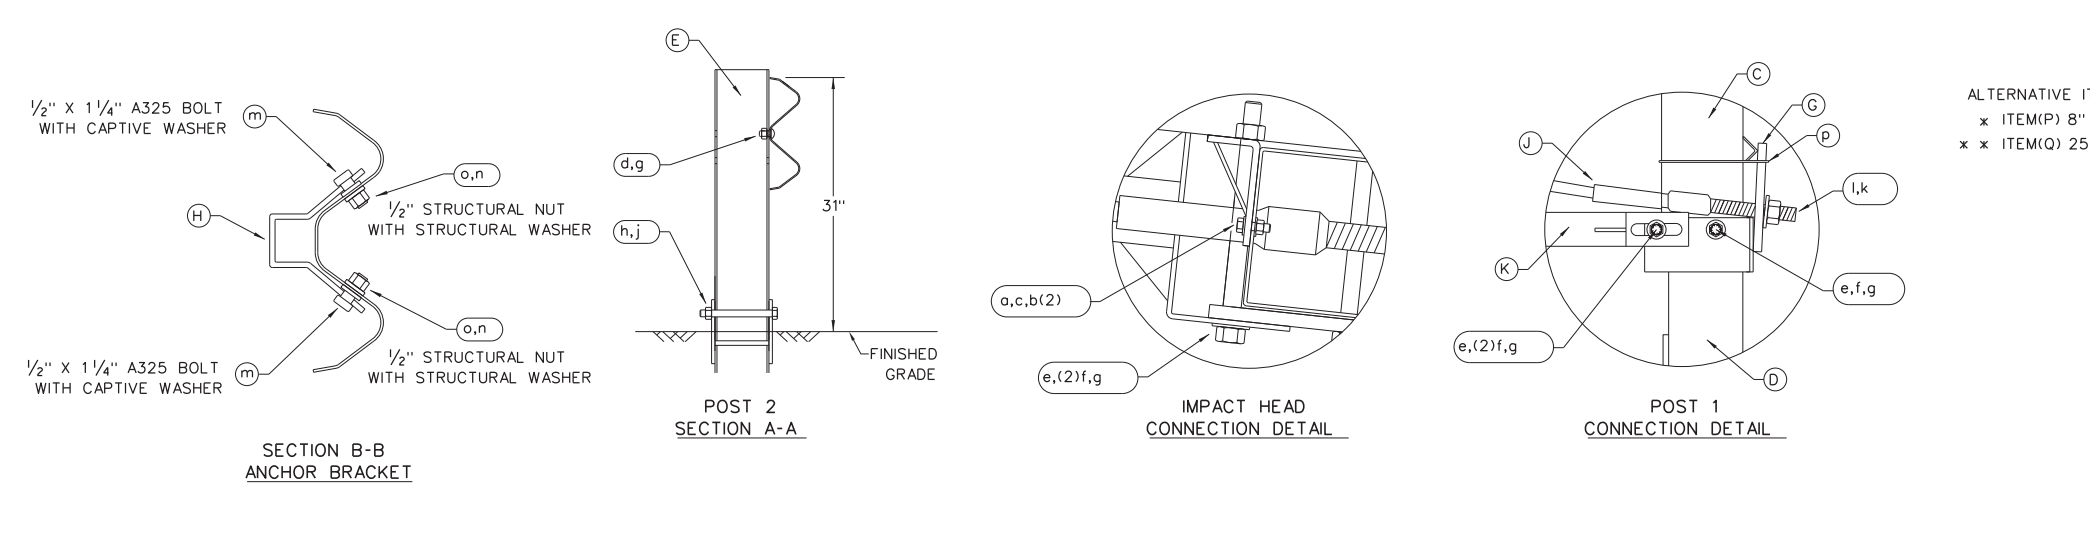

**Design Division Standard**

## SINGLE GUARDRAIL TERMINAL MSKT-MASH-TL-3


### SGT(12S)31-18

FILE: sgt12s3118.dgn	DN: TxDOT	CK: KM	DW: VP	CK: CL
© TxDOT: APRIL 2018	CONT SECT	JOB	HIGHWAY	
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	68	


NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE: 12/20/2023  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.v4 - Design\Master Design File\SGT(13S)31-18.dgn

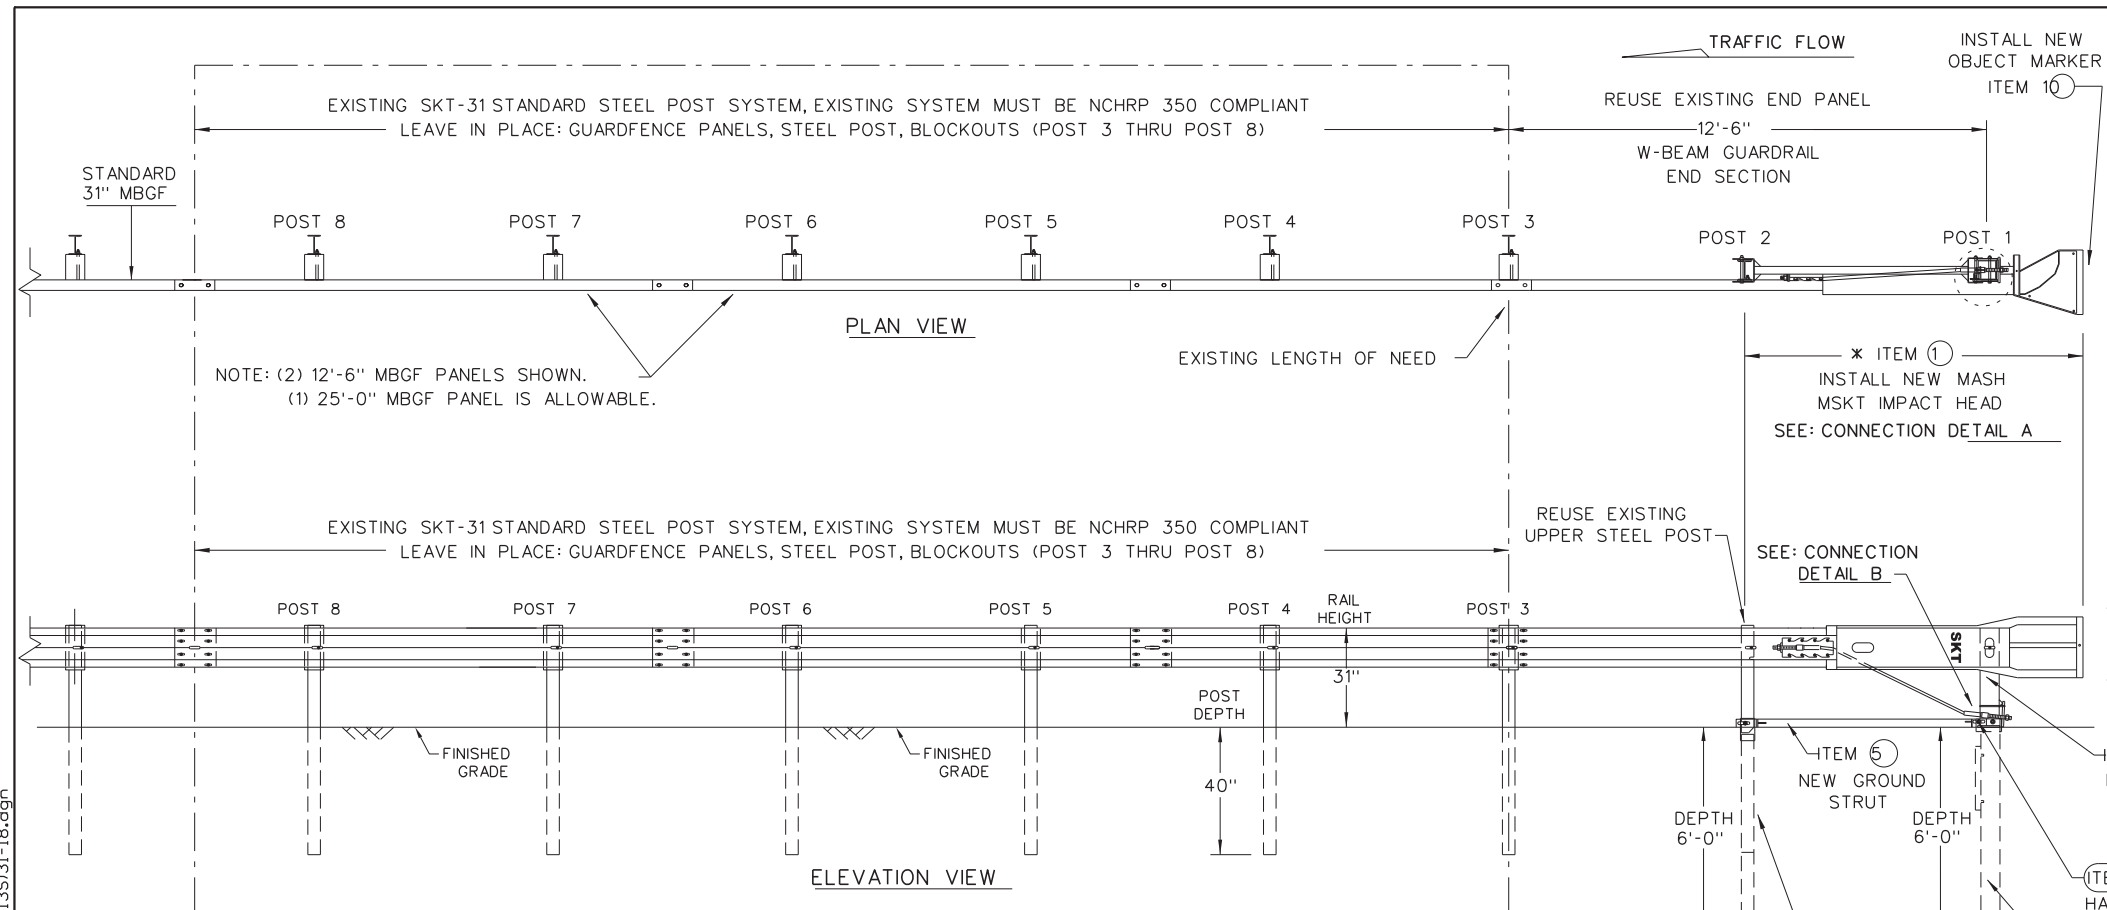

- ### GENERAL NOTES
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
  - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
  - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, AND REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - THE EXISTING SKT 31" STANDARD STEEL POST SYSTEM MUST BE THOROUGHLY INSPECTED, AND DETERMINED TO BE INTACT, AND FREE OF ANY DAMAGE OR DEFECTS BEFORE RETROFITTING. THIS INSPECTION INCLUDES COMPLETING THE MSKT RETROFIT INSPECTION CHECKLIST FOR THE EXISTING SKT 31" STEEL POST NCHRP 350 SYSTEM. ALL EXISTING, AND REUSABLE PARTS MUST BE FREE OF ANY DAMAGE FOR A MASH COMPLIANT RETROFIT.
  - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
  - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRoACHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
  - SPECIAL DRIVING CAP TO BE USED WHEN DRIVING (LOWER POSTS 1 & 2) TO PREVENT DAMAGE TO THE WELDED PLATES.

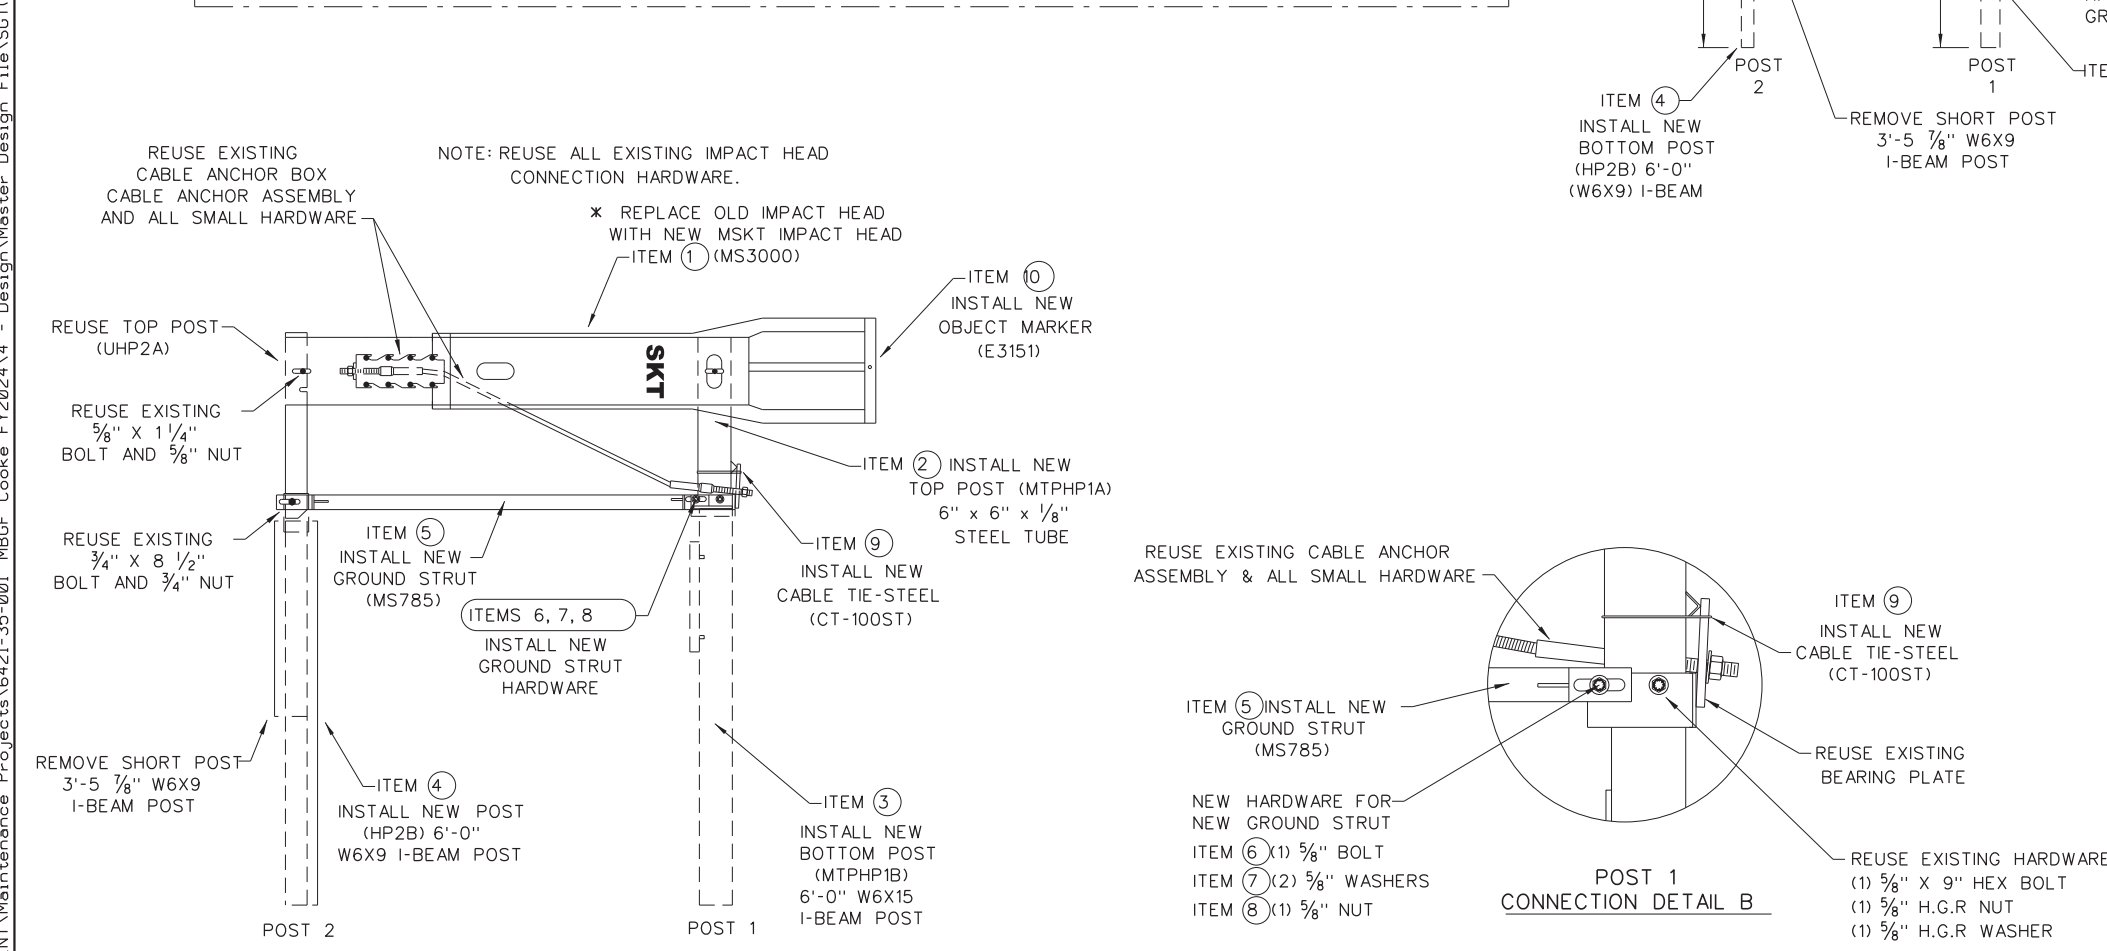

ITEMS	QTY	MAIN SYSTEM COMPONENTS	PART NUMBERS
* 1	1	MSKT IMPACT HEAD	MS3000
2	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
3	1	POST 1 - BOTTOM (6" W6X15)	MTPHP1B
4	1	POST 2 - ASSEMBLY BOTTOM (6" W6X9)	HP2B
5	1	GROUND STRUT	MS785
6	1	5/8" X 9" HEX BOLT (GRD A449)	B580904A
7	2	5/8" WASHERS	W050
8	1	5/8" H.G.R NUT	N050
9	1	CABLE TIE-STEEL	CT-100ST
* 10	1	OBJECT MARKER 18" X 18"	E3151

COMPONENTS REQUIRED TO RETROFIT: EXISTING 31" STEEL POST (NCHRP 350 SKT) GUARDRAIL TERMINAL WITH THE NEW 31" (MASH COMPLIANT MSKT IMPACT HEAD).  
 \* IF THE EXISTING NCHRP 350 (31" STEEL POST SKT) ALREADY HAS THE MSKT IMPACT HEAD THERE IS NO NEED TO REPLACE THE IMPACT HEAD OR OBJECT MARKER AS LONG AS IT IS NOT DAMAGED.




**RETIROFIT STANDARD**  
**SKT 31" STEEL POST SYSTEM**  
**TO MASH MSKT**  
**SGT(13S)31-18**

FILE: sgt13s3118.dgn	DN: TXDOT	CK: KM	DW: VP	CK: CL
© TXDOT: APRIL 2018	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	69	

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE EXISTING; SKT END TERMINAL RETROFITED TO THE MSKT MASH COMPLIANT TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.





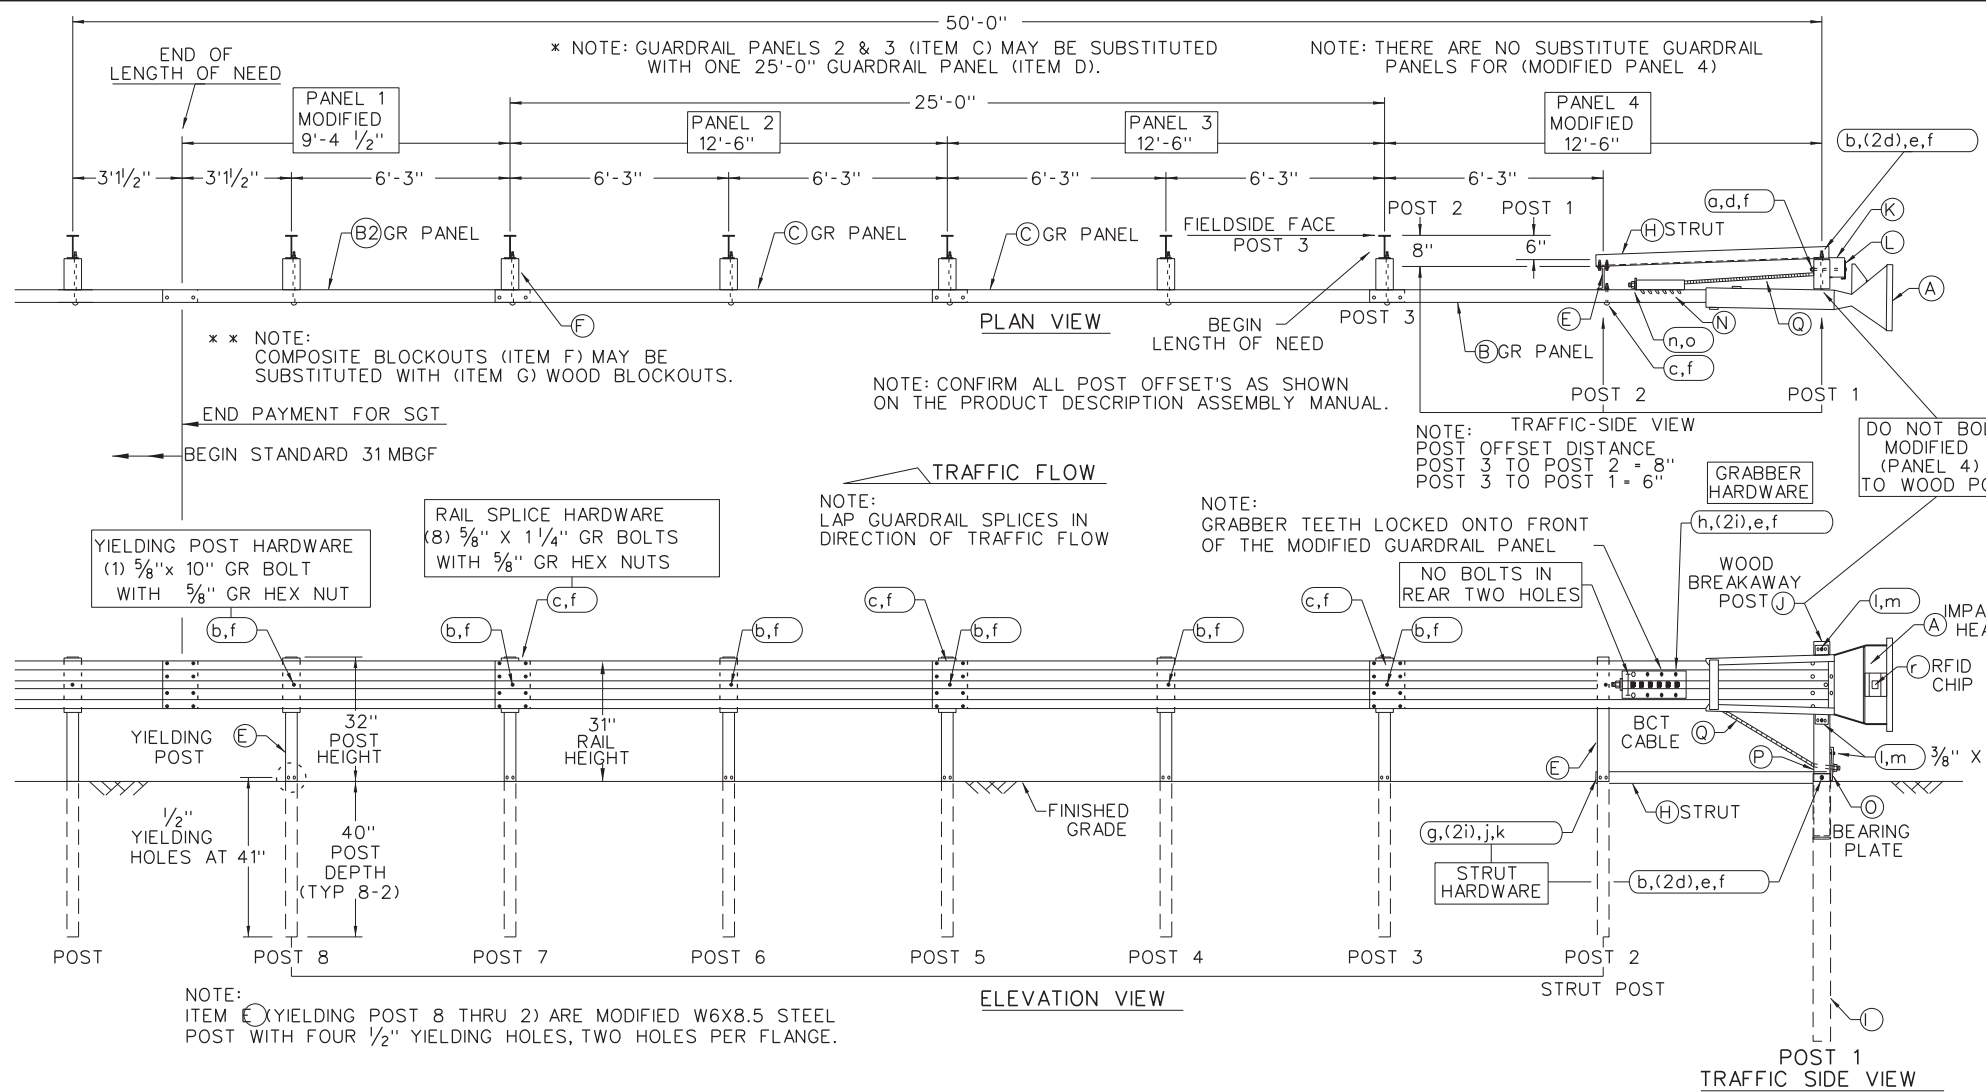


- ### GENERAL NOTES
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: SPIG INDUSTRY, INC. AT (1267) 644-9510. 14675 INDUSTRIAL PARK RD, BRISTOL, VA 24202
  - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE MANUFACTURER'S: SGET END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL.
  - MANUFACTURER WILL APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" TO THE FACE PLATE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. THE OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - THE NOMINAL HEIGHT OF THE GUARDRAIL BEAM IS 31 INCHES WITH A TOLERANCE OF +/- ONE INCH.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - (POST 2 THROUGH POST 8) ARE MODIFIED STEEL-YIELDING POSTS WITH YIELDING HOLES AT GROUND LEVEL. THERE ARE NO SUBSTITUTE POSTS.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - IF SOLID ROCK IS ENCOUNTERED FOR ANY OF THE POSTS IN THE SYSTEM, CONTACT THE MANUFACTURER FOR SPECIFIC INSTALLATION GUIDANCE.
  - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
  - A COMPOSITE MATERIAL BLOCKOUT THAT MEETS DMS-7210 REQUIREMENTS MAY BE SUBSTITUTED FOR AN APPROVED WOOD BLOCKOUT. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
  - THE ENTIRE SYSTEM MUST BE INSTALLED IN A STRAIGHT LINE WITHOUT ANY CURVE. HOWEVER, THE SYSTEM CAN BE OFFSET BY TWO FEET AS SHOWN ON THE APPROACH GRADING DETAIL TO HELP OFF-SET THE IMPACT HEAD FROM SHOULDER OF THE ROAD.

TEM	QTY	MAIN SYSTEM COMPONENTS	ITEM #
A	1	SGET IMPACT HEAD	SIH1A
B	1	MODIFIED GUARDRAIL PANEL 12'-6" 12GA	126SPZGP
B2	1	MODIFIED GUARDRAIL PANEL 9'-4 1/2" 12GA	GP94
C	2	STANDARD GUARDRAIL PANEL 12'-6" 12GA	GP126
D	1	STANDARD GUARDRAIL PANEL 25'-0" 12GA	GP25
E	7	MODIFIED YIELDING I-BEAM POST W6x8.5	YP6MOD
F	6	COMPOSITE BLOCKOUT 6" X 8" X 14"	CB08
G	6	WOOD BLOCKOUT 6" X 8" X 14"	WB08
H	1	STRUT 3" X 3" X 80" X 1/4" A36 ANGLE	STR80
I	1	FOUNDATION TUBE 6" X 8" X 72" X 3/16"	FNDT6
J	1	WOOD BREAKAWAY POST 5 1/2" X 7 1/2" X 50"	WBRK50
K	1	WOOD STRIKE BLOCK	WSBK14
L	1	STRIKE PLATE 1/4" A36 BENT PLATE	SPLT8
M	1	REINFORCEMENT PLATE 12 GA. GR55	REPLT17
N	1	GUARDRAIL GRABBER 2 1/2" X 2 1/2" X 16 1/2"	GGR17
O	1	BEARING PLATE 8" X 8 5/8" X 5/8" A36	BPLT8
P	1	PIPE SLEEVE 4 1/4" X 2 3/8" O.D. (2 1/8" I.D.)	PSLV4
Q	1	BCT CABLE 3/4" X 81" LENGTH	CBL81

SMALL HARDWARE			
a	1	5/8" X 12" GUARDRAIL BOLT 307A HDG	12GRBLT
b	7	5/8" X 10" GUARDRAIL BOLT 307A HDG	10GRBLT
c	33	5/8" X 1 1/4" GR SPLICE BOLTS 307A HDG	1GRBLT
d	3	5/8" FLAT WASHER F436 A325 HDG	58FW436
e	1	5/8" LOCK WASHER HDG	58LW
f	39	5/8" GUARDRAIL HEX NUT HDG	58HN563
g	2	1/2" X 2" STRUT BOLT A325 HDG	2BLT
h	6	1/2" X 1 1/4" PLATE BOLT A325 HDG	125BLT
i	16	1/2" FLAT WASHER F436 A325 HDG	12FWF436
j	8	1/2" LOCK WASHER HDG	12LW
k	8	1/2" HEX NUT A563 HDG	12HN563
l	4	3/8" X 3" HEX LAG SCREW GR5 HDG	38LS
m	4	3/8" FLAT WASHER F436 A325 HDG	38FW844
n	2	1" FLAT WASHER F436 A325 HDG	1FWF436
o	2	1" HEX NUT A563HDG	1HN563
p	1	18" TO 24" LONG ZIP TIE RATED 175-200LB	ZPT18
q	1	1 1/2" X 4" SCH-40 PVC PIPE	PSPCR4
r	1	RFID CHIP RATED MIL-STD-810F	RFID810F
s	1	IMPACT HEAD REFLECTIVE SHEETING	RS30M

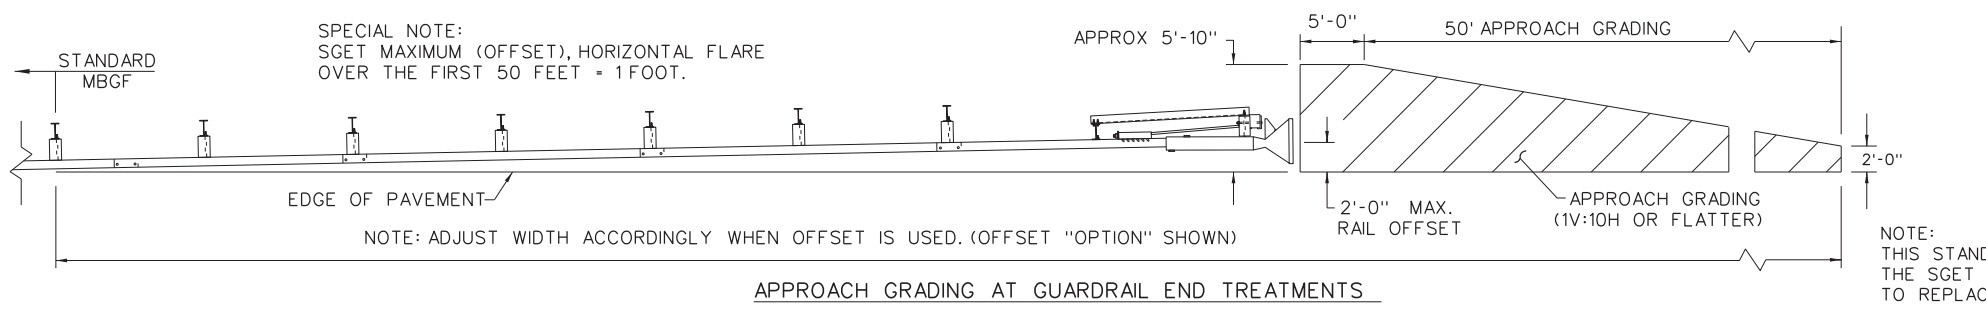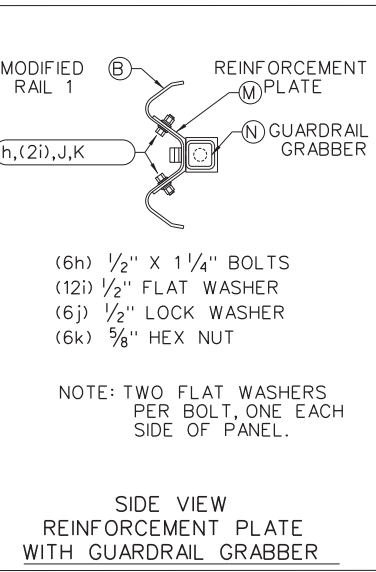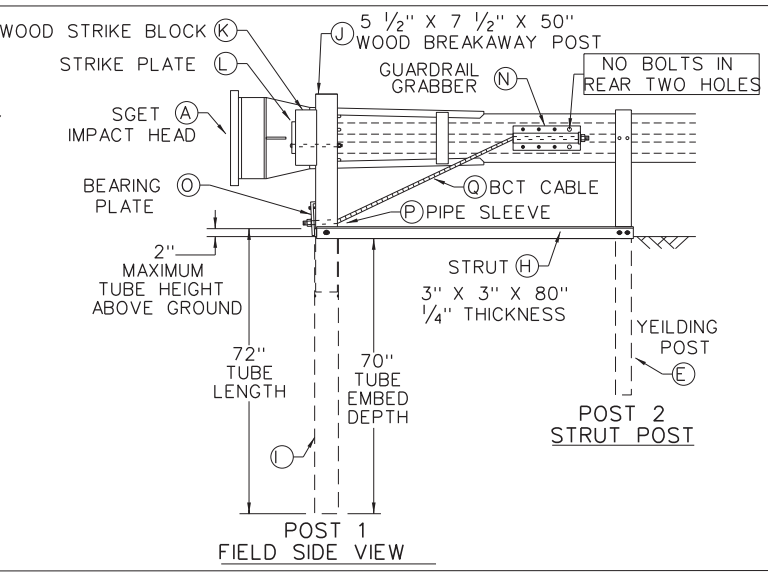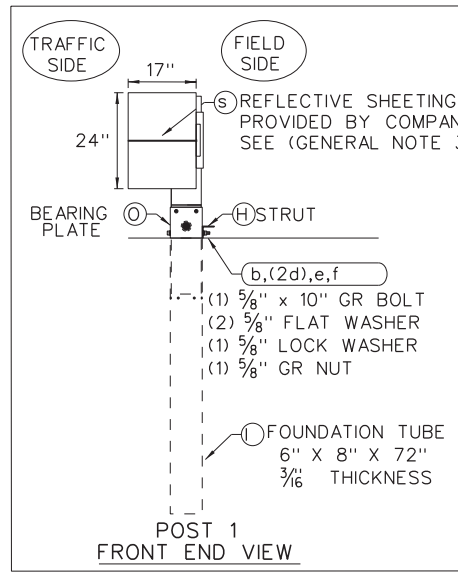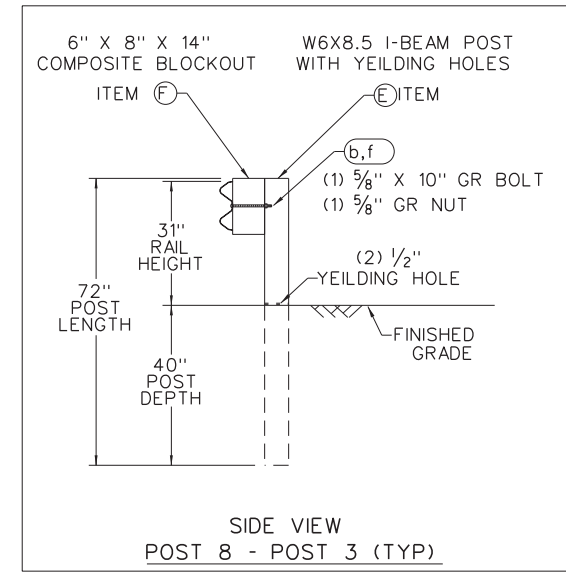

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE SGET TERMINAL SYSTEM AND IS NOT INTENDED TO REPLACE THE MANUFACTURER'S ASSEMBLY MANUAL.

**Texas Department of Transportation**

**Design Division Standard**


**SPIG INDUSTRY, LLC**  
**SINGLE GUARDRAIL TERMINAL**  
**SGET - TL-3 - MASH**  
**SGT(15)31-20**

FILE: sgt153120.dgn	DN: TxDOT	CK: KM	DW: VP	CK: VP
© TXDOT: APRIL 2020	CONT: 6421	SECT: 35	JOB: 001	HIGHWAY: US 287, ETC.
REVISIONS:	DIST: WFS	COUNTY: MONTAGUE, ETC.	SHEET NO. 70	


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions resulting from its use.

DATE: 12/20/2023 4:40:10 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\MBGF\Drawings\711-711-711.dwg

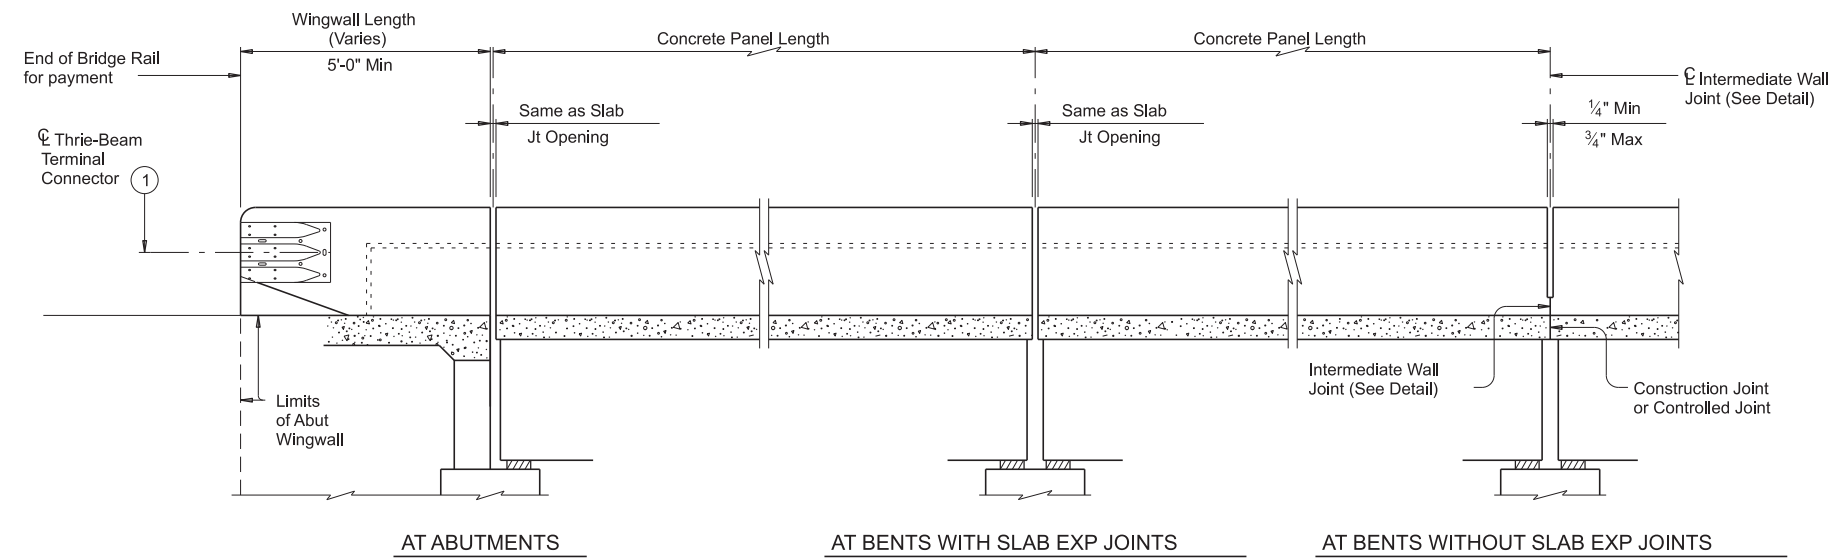

**ROADWAY ELEVATION OF RAIL**

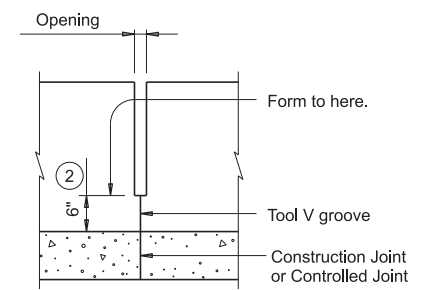


**INTERMEDIATE WALL JOINT DETAIL**


Provide at all interior bents without slab expansion joints.

5 ~ 7/8" Dia A325 Bolts with two 1 3/4" O.D. washers. Place washer under each head and nut. Tighten the 5 Terminal Connection Bolts in a well distributed pattern so to prevent damage or distortion of the Thrie-Beam Connection and the MBGF Transition. Cut bolts off after installation so as to extend no more than beyond nut. Paint ends of cut-off bolts with Zinc-rich paint.

5 ~ 1" Dia holes and 2 1/2" Dia x 2" deep recesses. Form or core holes and recesses. Percussion drilling is not permitted. Adjust placement of reinforcing steel as necessary to avoid bolt holes and recesses.

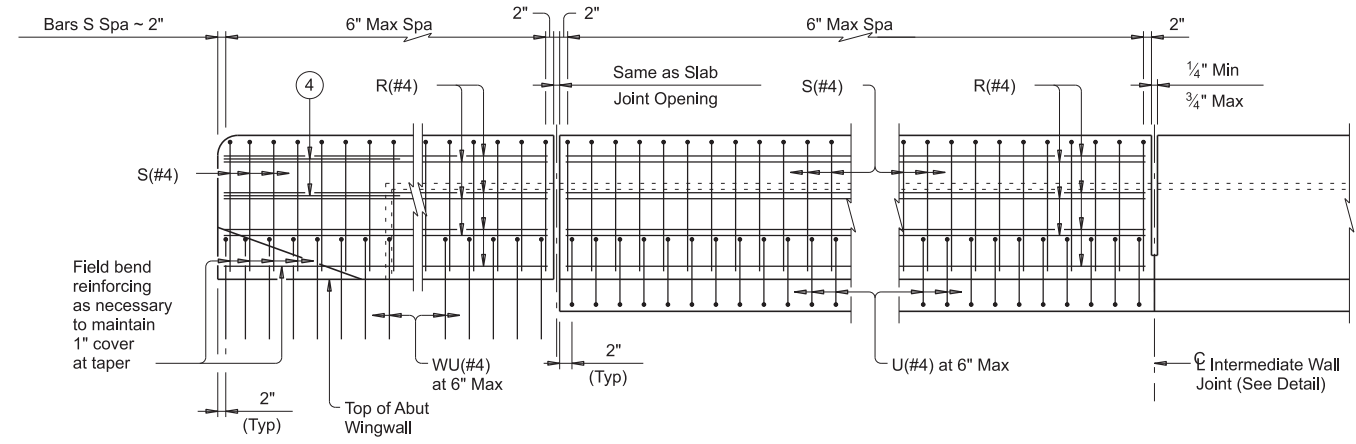

**ELEVATION SHOWING TYPICAL REINFORCING PLACEMENT**

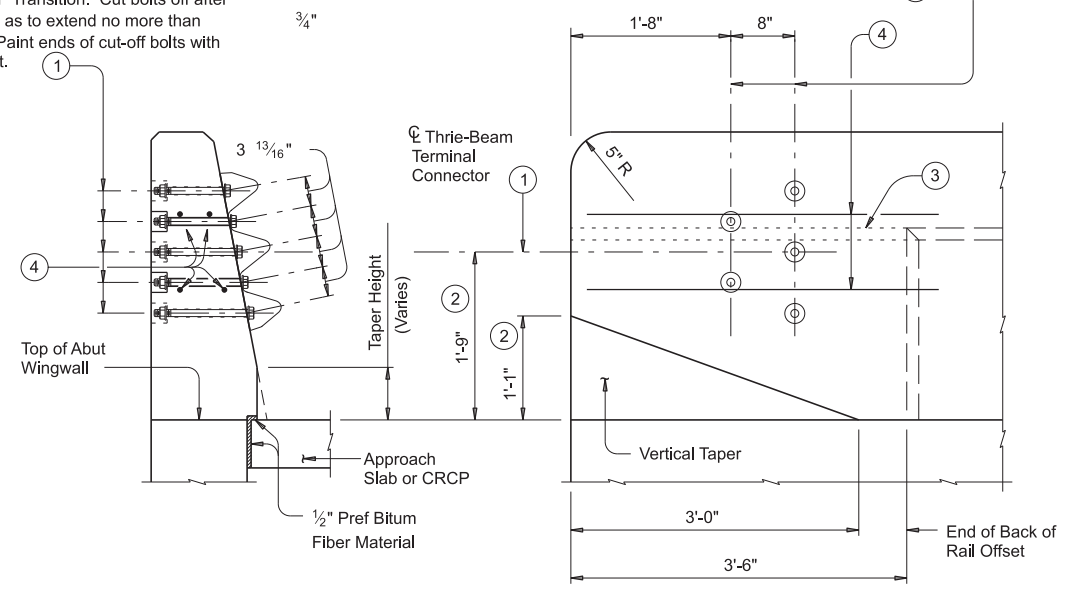

**TERMINAL CONNECTION DETAILS**


- 1 Terminal Connectors and associated hardware are to be paid for under the Item "Metal Beam Guard Fence". Attach Metal Beam Guard Fence Transitions to the bridge rail and extend along the embankment unless otherwise shown in the plans.
- 2 Increase 2" for structures with Overlay.
- 3 Back of rail offset may, with Engineer's approval, be continued to the end of the railing.
- 4 Place 4 additional Bars R(#4) 3'-8" in length inside Bars S(#4) and centered 2'-0" from end of rail when Terminal Connections are required.
- 5 Bolt recesses are only required when pedestrian sidewalks are adjacent to back of rail.

SHEET 1 OF 2


		<b>Bridge Division Standard</b>	
<h2>TRAFFIC RAIL SINGLE SLOPE</h2>			
<h3>TYPE SSTR</h3>			
FILE: rstd014.dgn	DN: TxDOT	CK: TxDOT	DW: JTR
©TxDOT July 2014	CONT	SECT	JOB
REVISIONS	6421	35	001 US 287, ETC.
DIST	COUNTY		SHEET NO.
WFS	MONTAGUE, ETC.		71

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information resulting from its use.


DATE: 12/20/2023 4:40:10 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001.MBGF\_Cooke\_FY2024.4 - Design

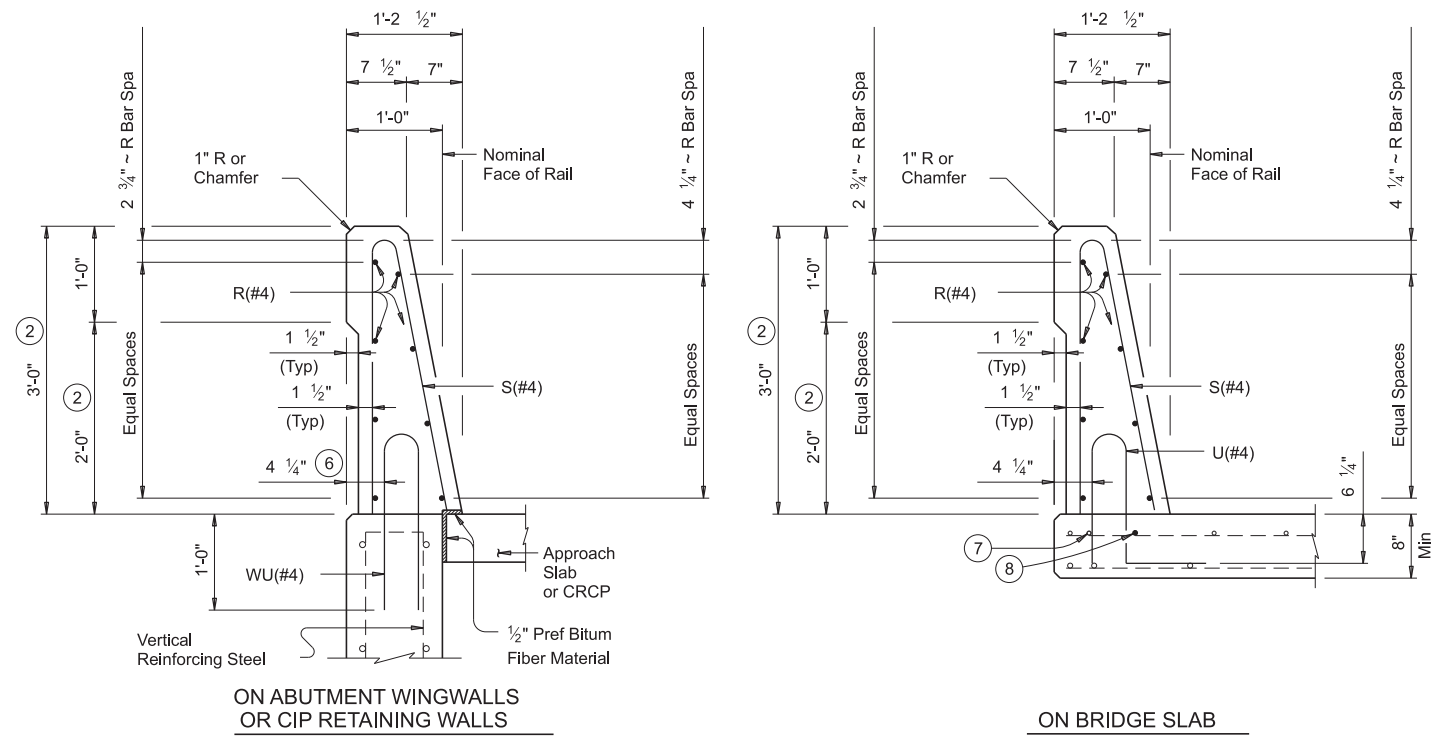


**SECTIONS THRU RAIL**

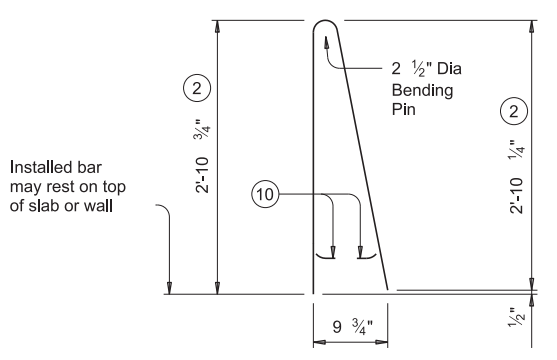


BARS S (#4)



BARS U (#4)



BARS WU (#4)

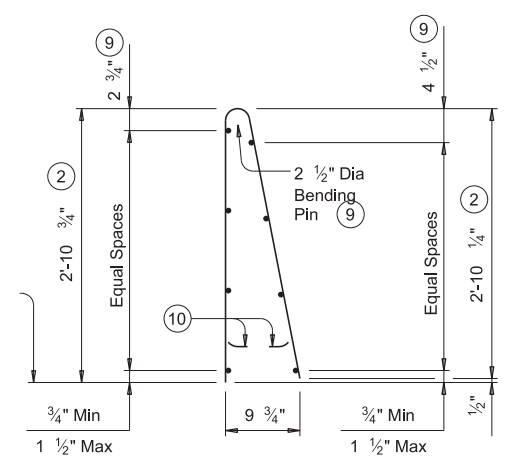

OPTIONAL WELDED WIRE REINFORCEMENT (WWR)


- 2 Increase 2" for structures with Overlay.
- 6 5/4" when vertical reinforcing has closer clear cover over horizontal reinforcing in abutment wingwalls or retaining walls on traffic side of wall.
- 7 As an aid in supporting reinforcement, additional longitudinal bars may be used in the slab with the approval of the Engineer. Such bars must be furnished at the Contractor's expense.
- 8 Top longitudinal slab bar may be adjusted laterally 3" plus or minus to tie reinforcing.
- 9 No longitudinal wires may be within upper bend.
- 10 Bend or cut as required to clear drain slots.
- 11 Space U(#4) bars at 4" Max when end region of panel length is less than 6'-0" to side slot drain. Space U(#4) bars at 6" Max when end region of panel length is 6'-0" and greater to side slot drain.

**CONSTRUCTION NOTES:**  
 This railing may be constructed with slip-forms when approved by the Engineer, with equipment approved by the Engineer. Provide sensor control for both line and grade. Tack welding to provide bracing for slip-form operations is acceptable. Welding can be performed at a minimum spacing of 3 ft between the cage and the anchorage. It is permissible to weld to U, WU and S bars at any location on the cage. If increased bracing is needed, provide additional anchorage devices and weld in the upper two thirds of the cage.  
 The back of railing must be vertical unless otherwise shown in the plans or approved by the Engineer.

**MATERIAL NOTES:**  
 Galvanize all steel components except reinforcing unless otherwise shown in plans.  
 Provide Class "C" concrete. Provide Class "C" (HPC) if required elsewhere.  
 Provide Grade 60 reinforcing steel.  
 Epoxy coat all rail reinforcement if slab bars are epoxy coated.  
 Deformed Welded Wire Reinforcement (WWR) (ASTM A1064) of equal size and spacing may be substituted for Bars U and WU unless noted otherwise. Deformed WWR (ASTM A1064) may be substituted for Bars R and S, as shown. Combinations of reinforcing steel and WWR or configurations of WWR other than shown are permitted if conditions in the table are satisfied. Provide the same laps as required for reinforcing bars.  
 Provide bar laps, where required, as follows:  
 Uncoated ~ #4 = 1'-5"  
 Epoxy coated ~ #4 = 2'-1"


**GENERAL NOTES:**  
 This rail has been successfully evaluated by full-scale crash test to meet MASH TL-4 criteria. This rail can be used for speeds of 50 mph and greater when a TL-3 rated guard fence transition is used. When a TL-2 rated guard fence transition is used, this rail can only be used for speeds of 45 mph and less.  
 Do not use this railing on bridges with expansion joints providing more than 5" movement.  
 Rail anchorage details shown on this standard may require modification for select structure types. See appropriate details elsewhere in plans for these modifications.  
 Shop drawings will not be required for this rail. Average weight of railing with no overlay is 376 plf.

Cover dimensions are clear dimensions, unless noted otherwise.  
 Reinforcing bar dimensions shown are out-to-out of bar.

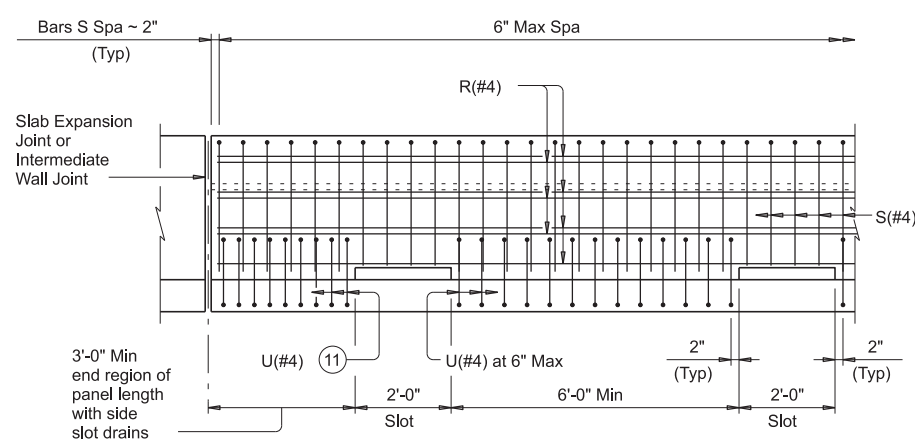

OPTIONAL SIDE SLOT DRAIN DETAIL

Note: Side Slot Drains may be used where shown elsewhere on the plans or as directed by the Engineer. Drains should not be placed over railroad tracks, lower roadways, or sidewalks. When this rail is used as a separator between a roadway surface and a sidewalk surface, side drain slots will not be permitted.

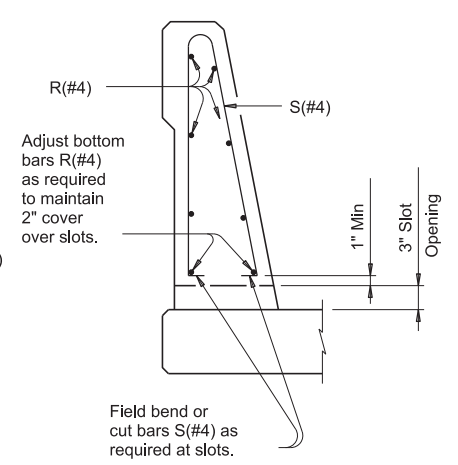

SECTION THRU OPTIONAL SIDE SLOT DRAIN

DESCRIPTION	LONGITUDINAL WIRES	VERTICAL WIRES
Minimum (Cumulative Total) Wire Area	1.067 Sq In.	0.267 Sq In. per Ft
Minimum	No. of Wires	Spacing
Maximum	8	4"
	10	8"
Maximum Wire Size Differential	The smaller wire must have an area of 40% or more of the larger wire.	

**Texas Department of Transportation** Bridge Division Standard


## TRAFFIC RAIL SINGLE SLOPE

### TYPE SSTR

FILE: rstd014.dgn	DN: TxDOT	CK: TxDOT	DW: JTR	CK: TxDOT
©TxDOT July 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	72	




DATE: 12/20/2023 4:40:11 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001.MBGF Cooke FY2024.v4 - Design\Master\_Design\_File\EMBANKMENT\_DETAIL.dgn

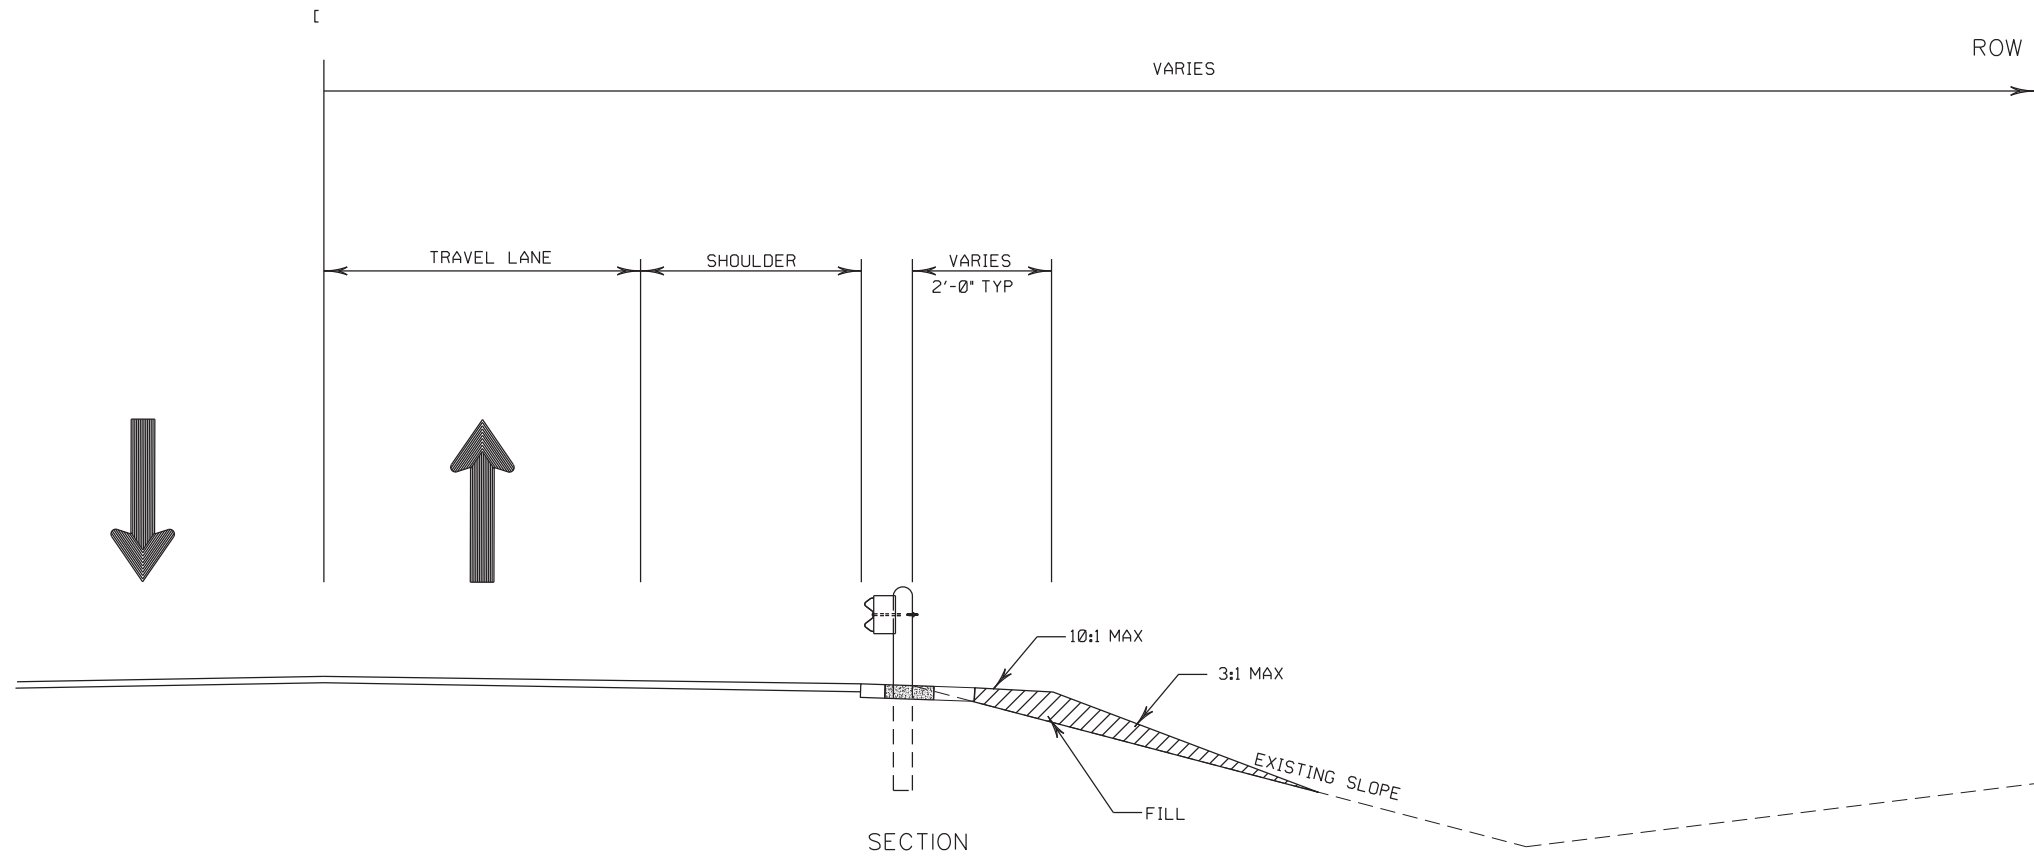

NOTES:

1. THE MATERIAL USED SHALL BE STABLE SOIL CAPABLE OF SUSTAINING VEGETATION.
2. MATERIAL MUST BE APPROVED BY THE ENGINEER BEFORE CONSTRUCTION BEGINS.
3. COMPLETE ALL EMBANKMENT WORK PRIOR TO PLACEMENT OF PROPOSED MBGF AND SGT.
4. SEE GF(31)MS-19 FOR DETAILS NOT SHOWN.


NOT TO SCALE



*Michael D. Reynolds II, P.E.*  
 12/21/2023  
 US 287, ETC.  
 EMBANKMENT  
 DETAIL



CONT	SECT	JOB	HIGHWAY
6421	35	001	US 287, ETC.
DIST	COUNTY	SHEET NO.	
WFS	MONTAGUE, ETC.	73	

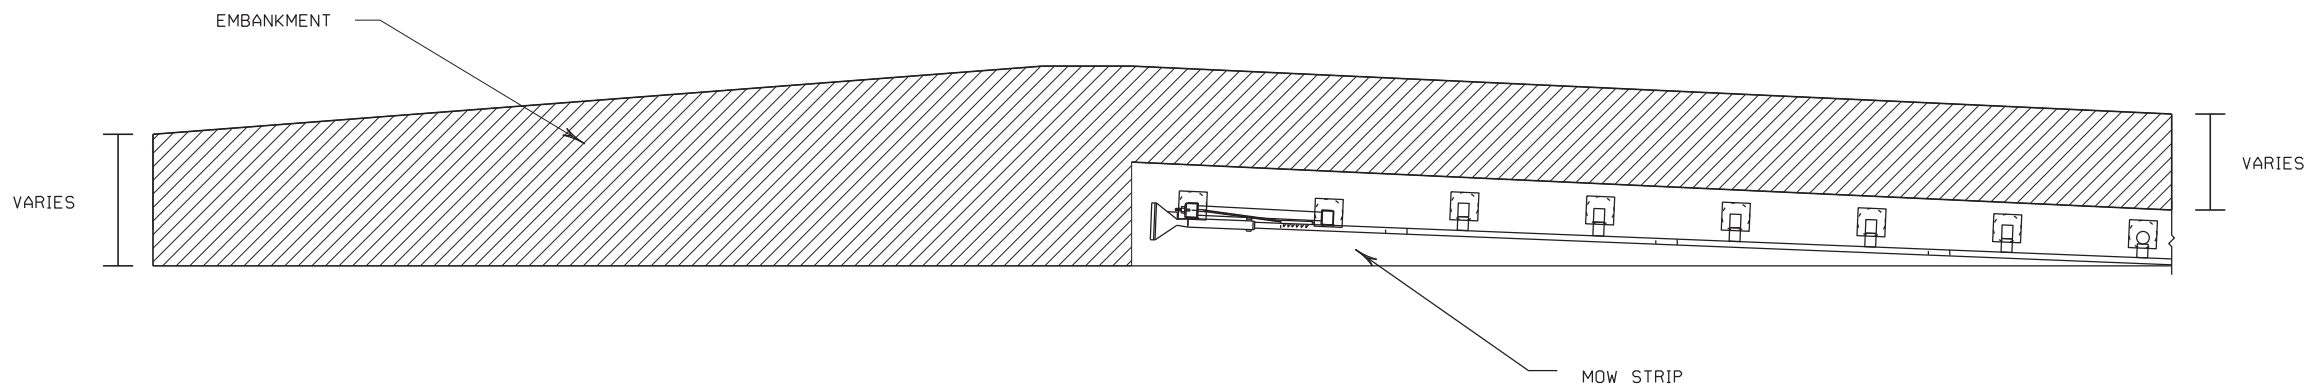

DATE: 12/20/2023 4:40:11 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Misc\_6421-35-001.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion or use of this standard in any manner other than that intended by the original author.

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS					DELINEATORS				D & OM DESCRIPTIVE CODES	
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	DEVICE	SINGLE		DOUBLE		INSTL DEL ASSM (D-XX)SZ X_(XXXX)XXX(XX) NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount DIRECTION If Required BI = Bi-Directional BR = Bi-Directional with red on back
	3" ± 1/16"	4" ± 1/16"	6" ± 1/8"	3" ± 1/16"		1-Size 2 reflector unit	1-Size 1 reflector unit	2-Size 2 reflector units	2-Size 1 reflector units	
SHEETING	Yellow, White or Red Type B or C reflective sheeting				SHEETING	Yellow, White or Red Type B or C Reflective Sheeting				INSTL OM ASSM (OM-XX) (XXXX)XXX(XX) TYPE OF OBJECT MARKER 1, 2, 3, or 4 NUMBER OF REFLECTORS OR DIRECTION X = 3-Size 2 reflector units (Type 2 only) Y = 1-Size 3 reflector unit (Type 2 only) Z = 3-Size 1 or 1-Size 4 reflector unit(s) (Type 2 only) L = Left Side (Type 3 Object Marker only) R = Right Side (Type 3 Object Marker only) C = Center (Type 3 Object Marker only) TYPE OF POST WC = Wing Channel Post WFLX = White Flexible Post TWT = Thin Walled Tubing TYPE OF MOUNT GND = Embedded (drivable) SRF = Surface Mount WAS = Wedge Anchor Steel WAP = Wedge Anchor Plastic DIRECTION If Required BI = Bi-Directional
NOTE	1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (flx). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.				POST TYPE	WC	YFLX, WFLX	WC	YFLX, WFLX	
					MOUNT TYPE	GND	GND, SRF	GND	GND, SRF	

OBJECT MARKERS										
DEVICE	Type 1 (OM-1)		Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)	
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4		
SHEETING	Yellow-Type B or C Sheeting FL	Yellow - Type B or C Sheeting			Alternating acrylic black and retroreflective yellow - Type B or C Sheeting			Red -Type B or C Sheeting		
POST TYPE	TWT	WC	WC	WFLX	TWT			TWT		
MOUNT TYPE	WAS, WAP	GND	GND	GND, SRF	WAS, WAP			WAS, WAP		

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE: Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.						
DEVICE	GF1	GF2	CTB	W1-8		W1-6									
SHEETING	Yellow, White, Red			18"x 24" (Conventional)		24"x 30" (Conventional Oversize)		30"x 36" (Expressway)		36" x 48" (Freeway)		48" x 24" (Conventional)		60" x 30" (Expressway & Freeway)	
NOTE	1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			MOUNTING HEIGHT		4'-0" or 7'-0"		MOUNTING HEIGHT		7'-0"		1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).			

DEPARTMENTAL MATERIAL SPECIFICATIONS	
FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600











**DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION**  
**D & OM(1)-20**


FILE: dom1-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
10-09 3-15	DIST	COUNTY		SHEET NO.
4-10 7-20	WFS	MONTAGUE, ETC.		74

20A

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions. The user assumes all liability for any incorrect results or damages resulting from its use.

DATE: 12/20/2023 4:40:12 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001\_MBGF\_Cooke\_FY2024.4 - Design\Miscellaneous\6421-35-001.dgn

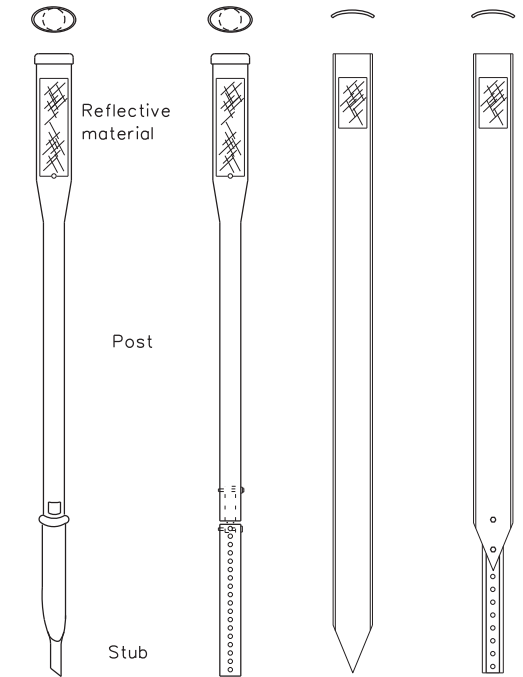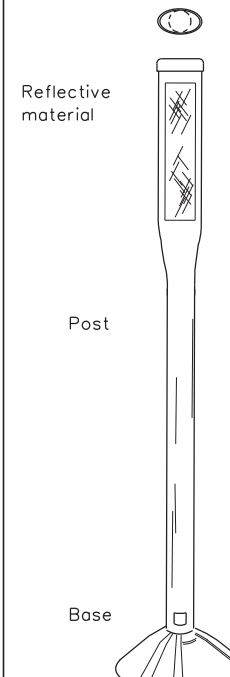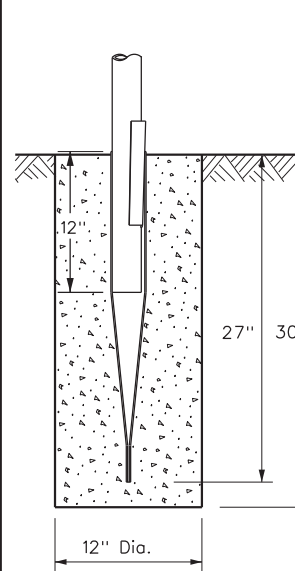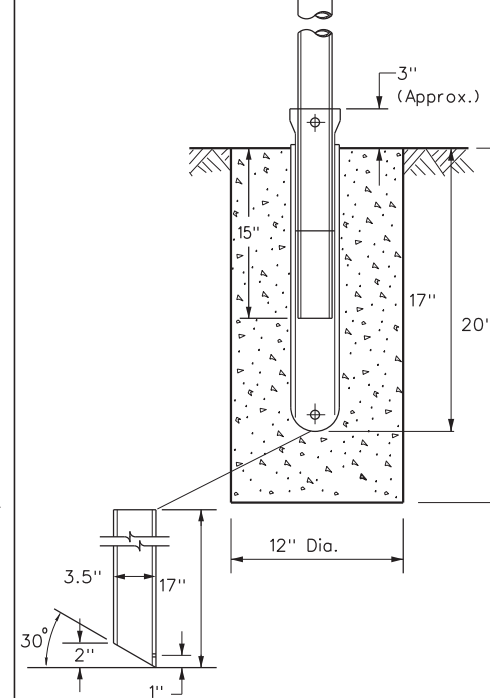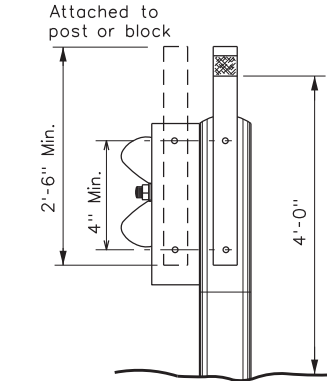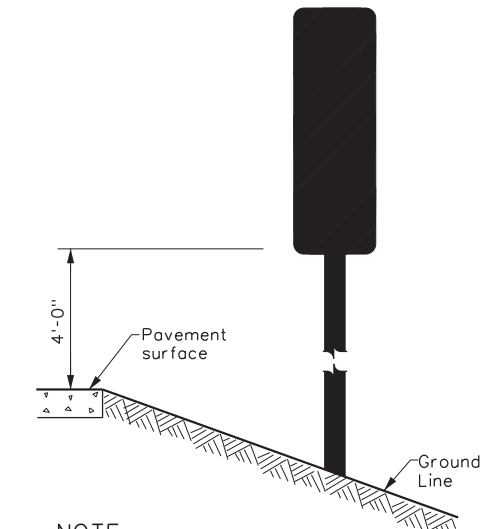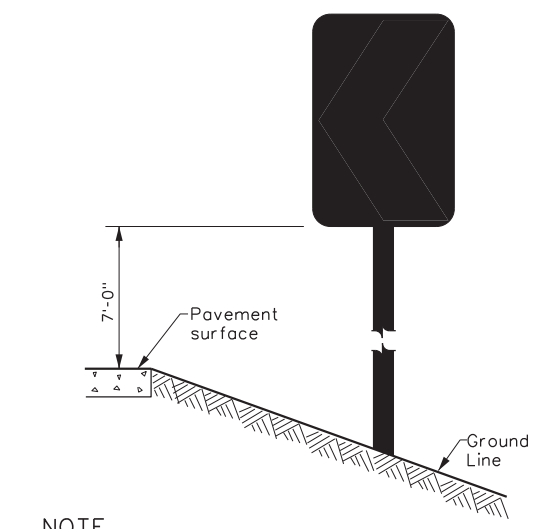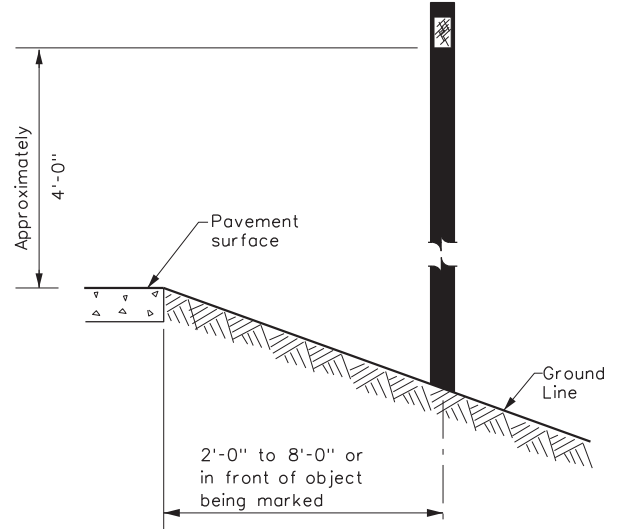POST TYPE AND SUPPORT FOUNDATION DETAILS				TYPE OF BARRIER MOUNTS		
WING CHANNEL (WC)	FLEXIBLE POSTS (YFLX, WFLX)		WEDGE ANCHOR SYSTEMS		GUARD FENCE ATTACHMENT	
GND	GND	SRF	WAS	WAP	GF1	
						
	EMBEDDED	SURFACE MOUNT	STEEL	PLASTIC	CONCRETE TRAFFIC BARRIER (CTB)	
<b>NOTES</b> 1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only. 2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.			<b>NOTES</b> 1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices. 2. Install per manufacturer's recommendations. 3. Post length may vary to meet field conditions. 4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.		<b>GENERAL NOTES</b> 1. Place delineators on a section of roadway at a consistent distance from the edge of pavement. 2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction. 3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible. 4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation. 5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface. 6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.	
<b>TYPES 1, 3, AND 4 OBJECT MARKERS AND CHEVRONS</b>		<b>CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN</b>		<b>DELINEATORS AND TYPE 2 OBJECT MARKERS</b>		
						
<b>NOTE</b> Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)		<b>NOTE</b> Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.		<b>NOTE</b> See general notes 1, 2 and 3.		



**Texas Department of Transportation**

**Traffic Safety Division Standard**

## DELINEATOR & OBJECT MARKER INSTALLATION

### D & OM(2)-20


FILE: dom2-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
10-09 3-15	DIST	COUNTY	SHEET NO.	
4-10 7-20	WFS	MONTAGUE, ETC.	75	

DATE: 12/20/2023 4:40:17 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.v4 - Design\Misc\6421-35-001.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this standard.

### MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	● RPMs	● RPMs
15 MPH & 20 MPH	● RPMs and One Direction Large Arrow sign	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	● RPMs and Chevrons; or ● RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	● RPMs and Chevrons


### SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

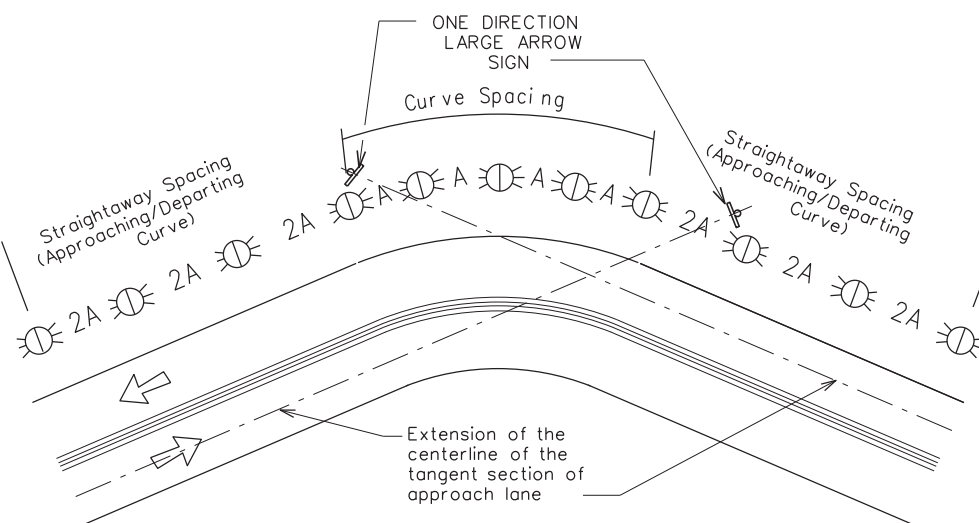

**NOTE**

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

### SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

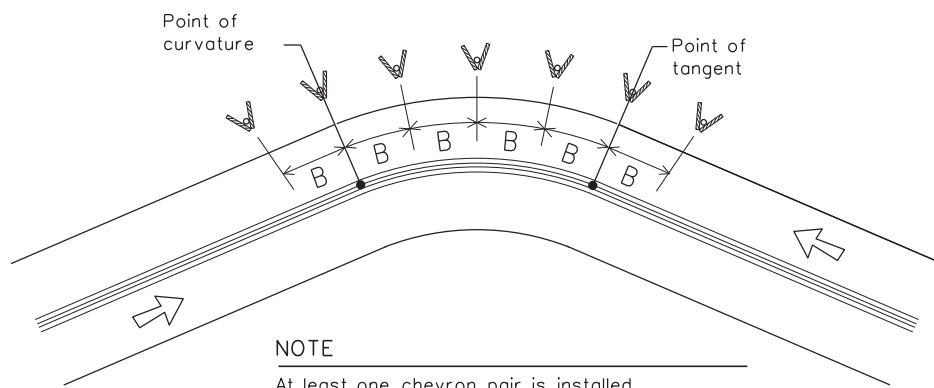

**NOTE**

At least one chevron pair is installed beyond the point of tangent in tangent section.

### DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

### DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

### DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy./Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

**NOTES**

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign



### DELINEATOR & OBJECT MARKER PLACEMENT DETAILS


#### D & OM(3)-20

FILE: dom3-20.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	WFS	MONTAGUE, ETC.	76	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from one format to another or for any errors or omissions that may appear in this standard. The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information from one format to another or for any errors or omissions that may appear in this standard.


DATE: 12/20/2023 4:40:17 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\Miscellaneous\6421-35-001.dgn

**CROSSOVERS**

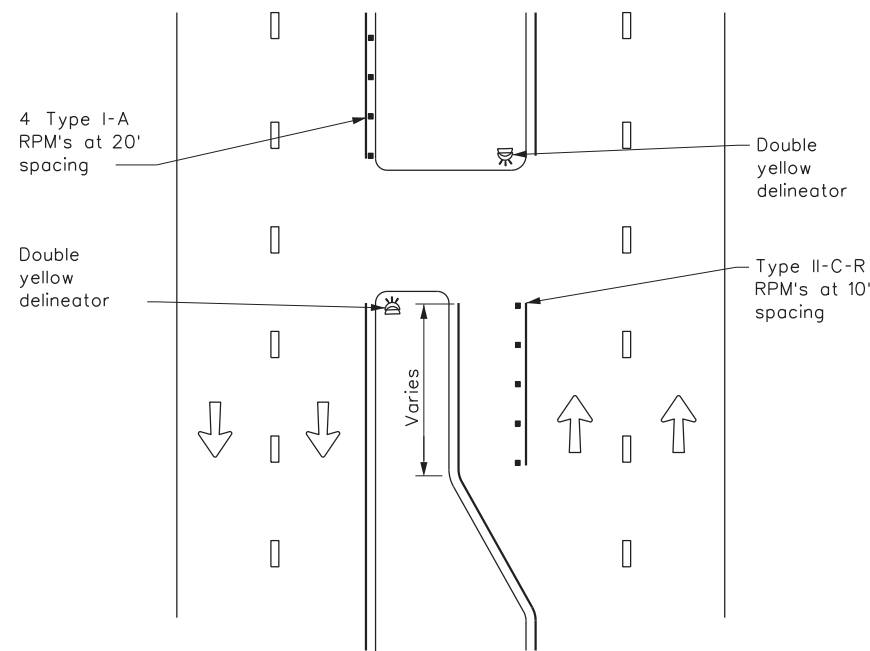


**DETAIL 1**

**FOR CULVERTS WITHOUT MBGF**

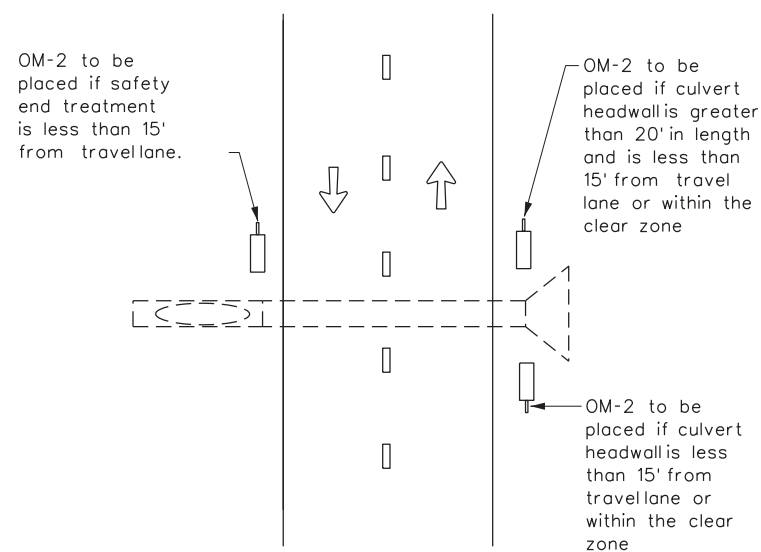


**DETAIL 2**

**FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES**

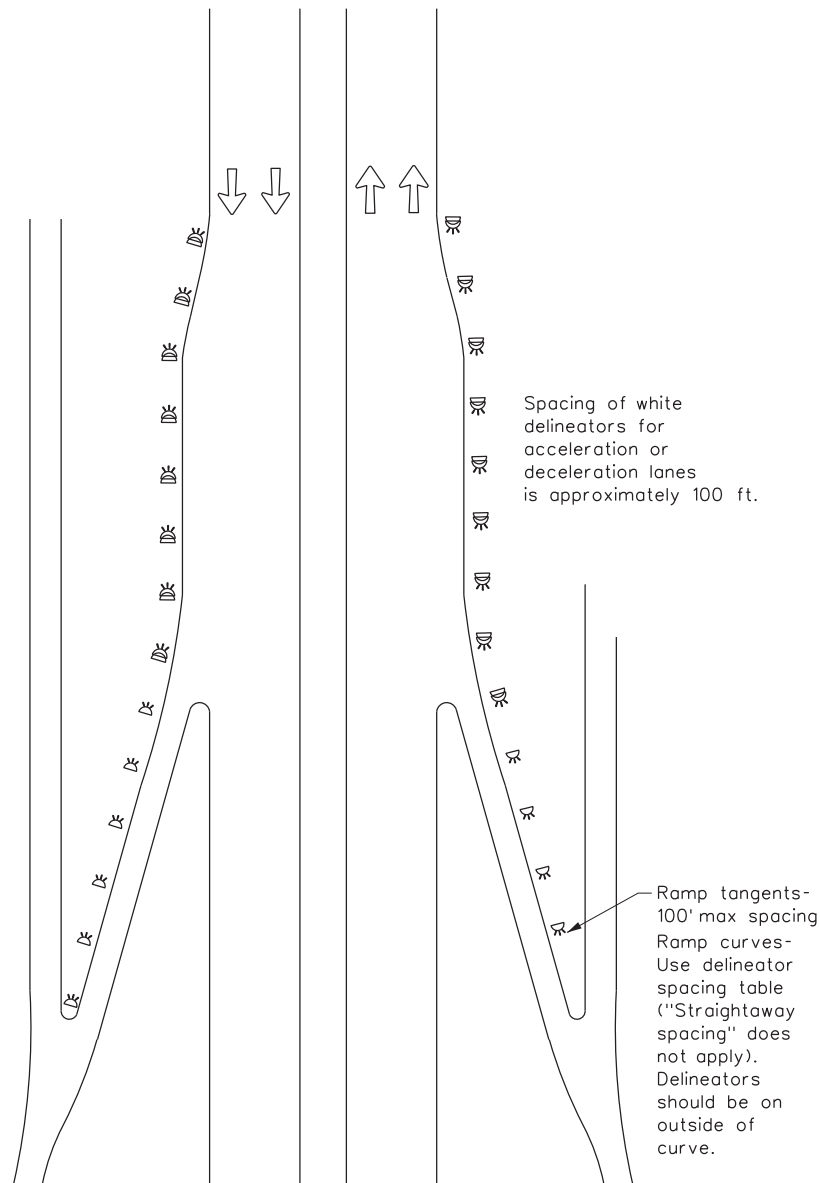


**DETAIL 3**

**TYPICAL APPLICATION OF DEAD END BARRICADE**

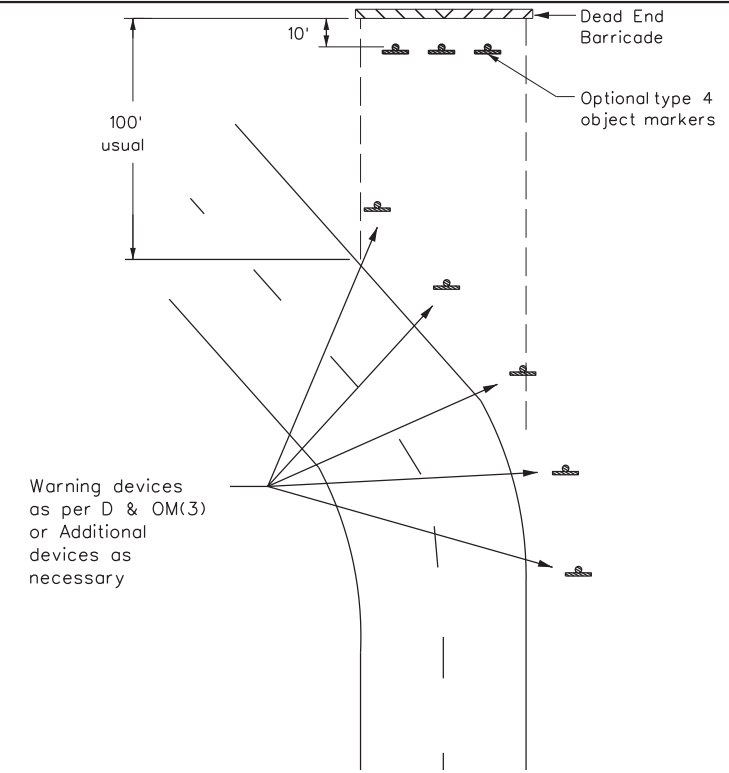

**DETAIL 4**

**TYPICAL DEAD END BARRICADE INSTALLATION**

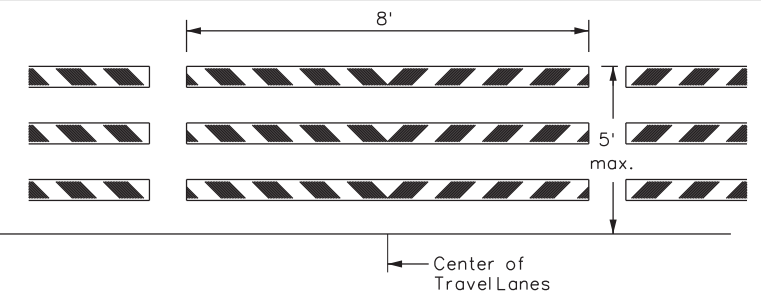

**NOTES**

1. Barricade striping shall be red and white reflective sheeting for all permanent road closures.
2. Barricade striping is red and white sloping toward the center of the roadway.
3. Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

**DETAIL 5**

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator



**DELINEATOR & OBJECT MARKER PLACEMENT DETAILS**

**D & OM(4)-20**

FILE: dom4-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
3-15	DIST	COUNTY	SHEET NO.	
7-20	WFS	MONTAGUE, ETC.	77	


**TWO-WAY, TWO LANE ROADWAY  
WITH REDUCED WIDTH APPROACH RAIL**

**TWO-WAY, TWO LANE ROADWAY  
WITH METAL BEAM GUARD FENCE (MBGF)**

**TWO-WAY, TWO LANE ROADWAY  
BRIDGE WITH NO APPROACH RAIL**


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information presented herein. If you have any questions, please contact the project engineer.

DATE: 12/20/2023 4:40:18 PM  
FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.v4 - Design\Misc\6421-35-001.dwg

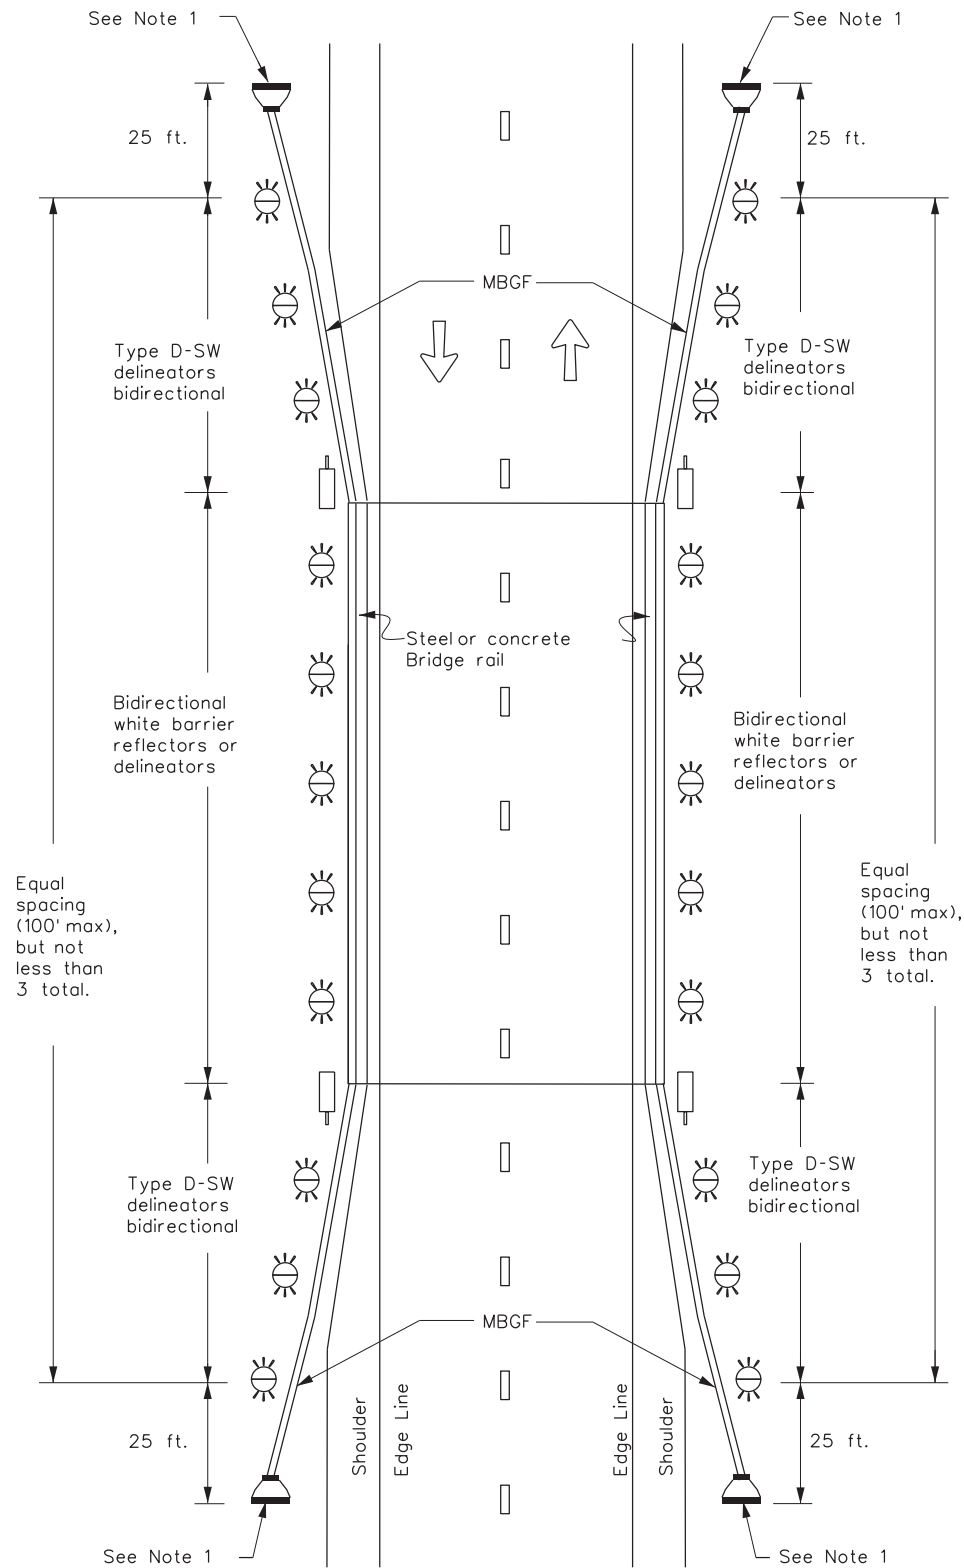


**NOTE:**

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

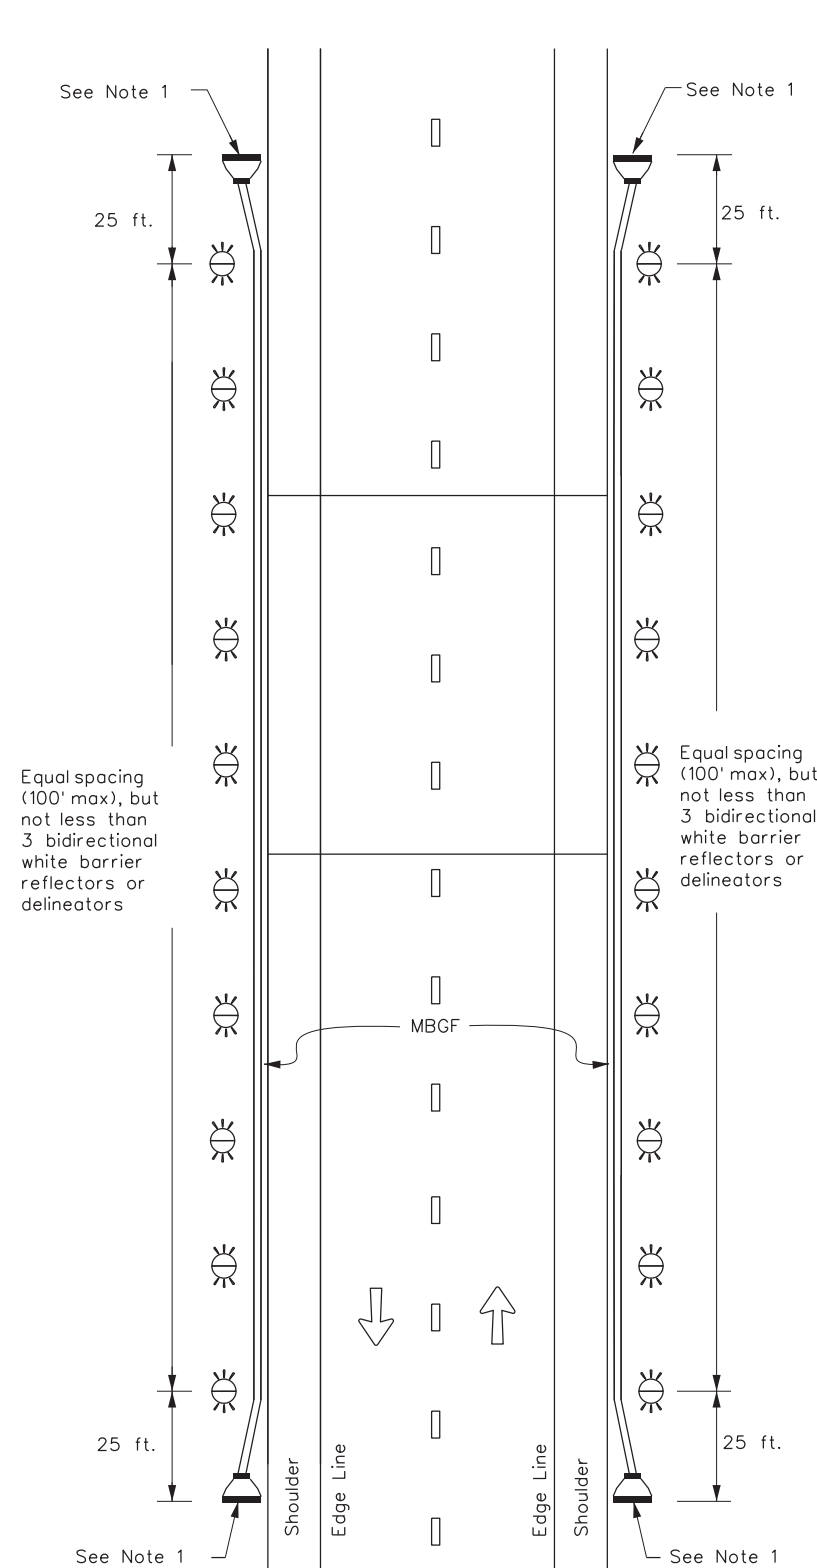

**NOTE:**

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

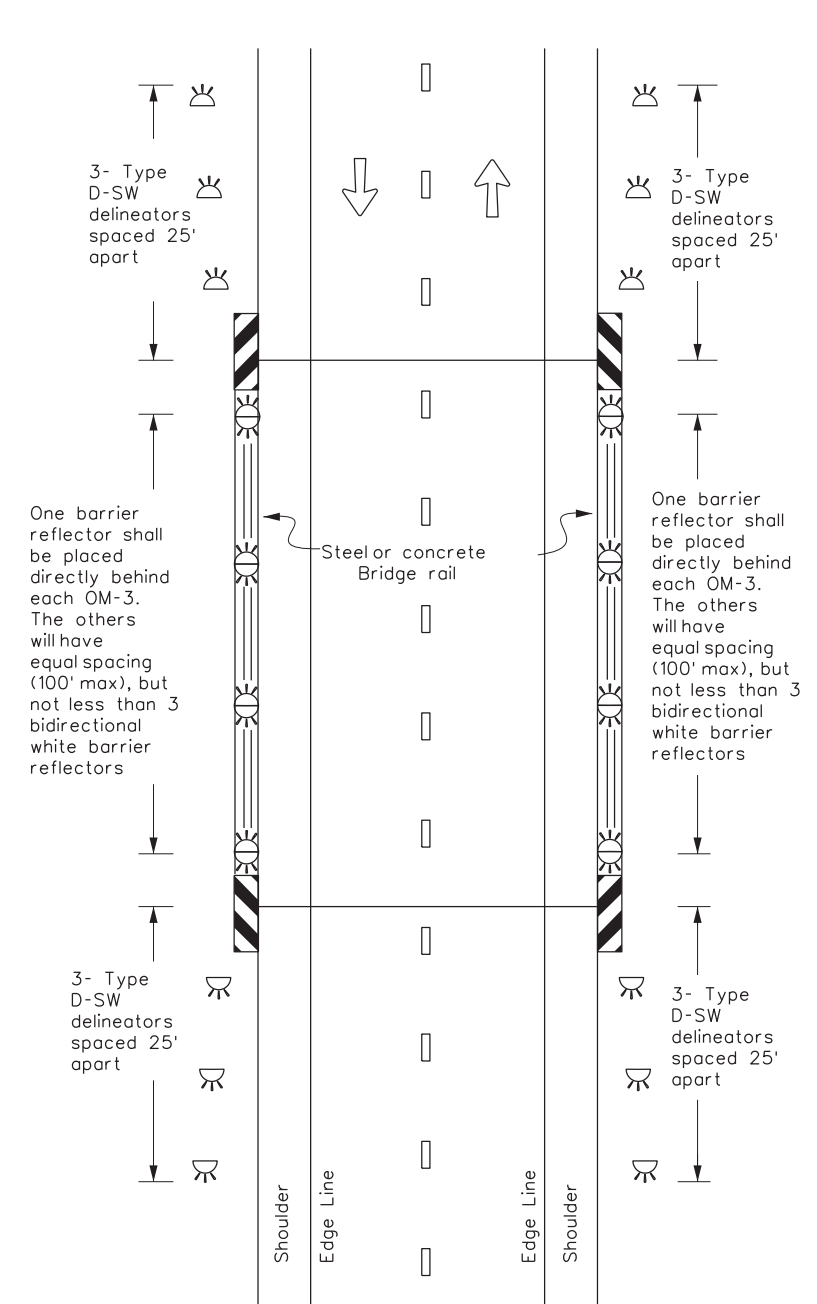

**LEGEND**

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow



Traffic Safety Division Standard

**DELINEATOR &  
OBJECT MARKER  
PLACEMENT DETAILS**


**D & OM(5)-20**

FILE: dom5-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT: 6421	SECT: 35	JOB: 001	HIGHWAY: US 287, ETC.
7-20	DIST: WFS	COUNTY: MONTAGUE, ETC.	SHEET NO. 78	


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information or for the correct results or damages resulting from its use.

DATE: 12/20/2023 4:40:18 PM  
 FILE: I:\WFSMAINT\Maintenance Projects\6421-35-001 MBGF Cooke FY2024.4 - Design\MBGF-6421-35-001.dwg


### CONTINUOUS CONCRETE OR STEEL BARRIER

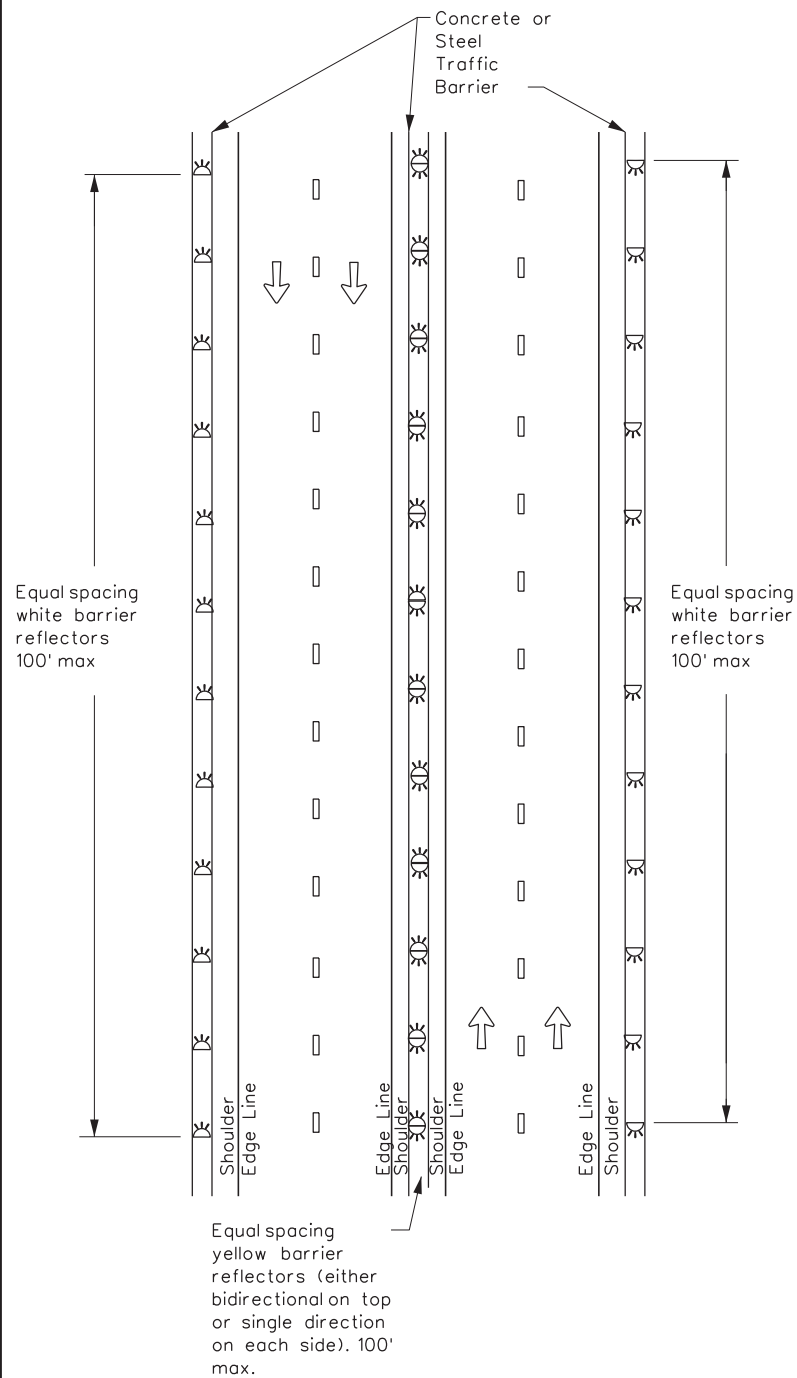


### MULTI-LANE UNDIVIDED, TWO-WAY ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

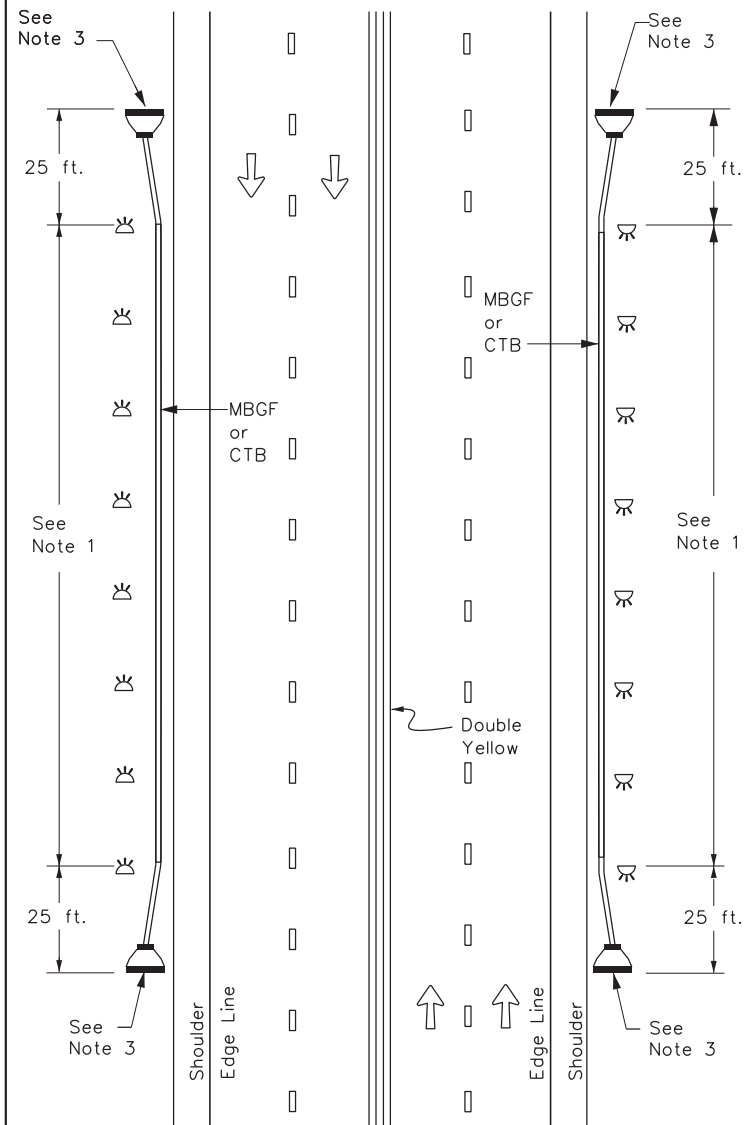

### DIVIDED ROADWAY WITH METAL BEAM GUARD FENCE (MBGF)

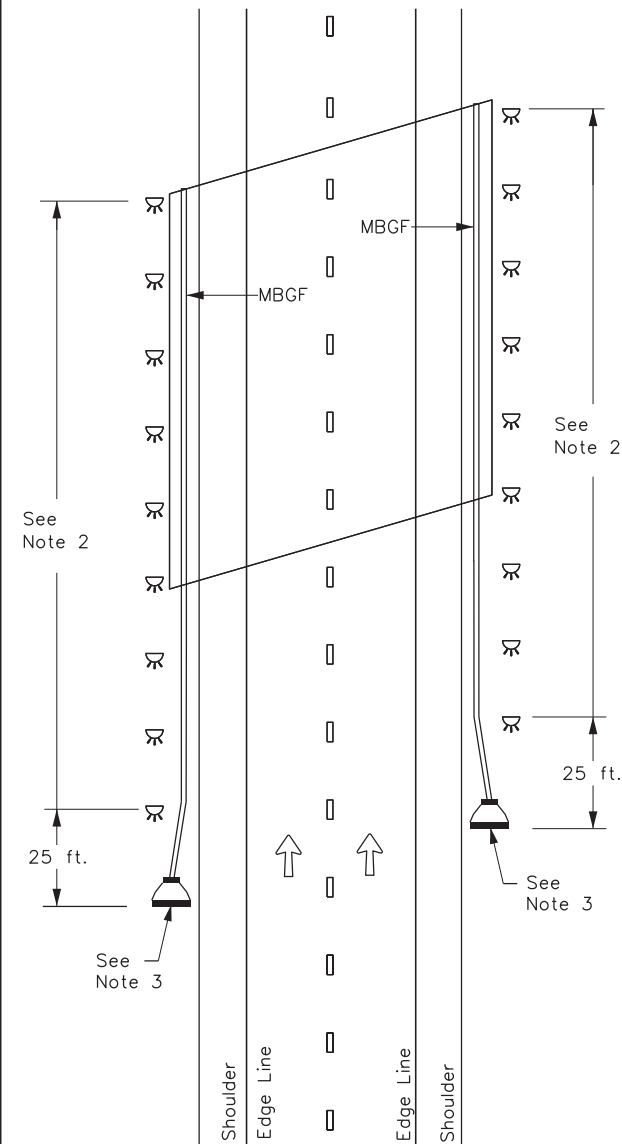

### EMERGENCY CROSSOVER

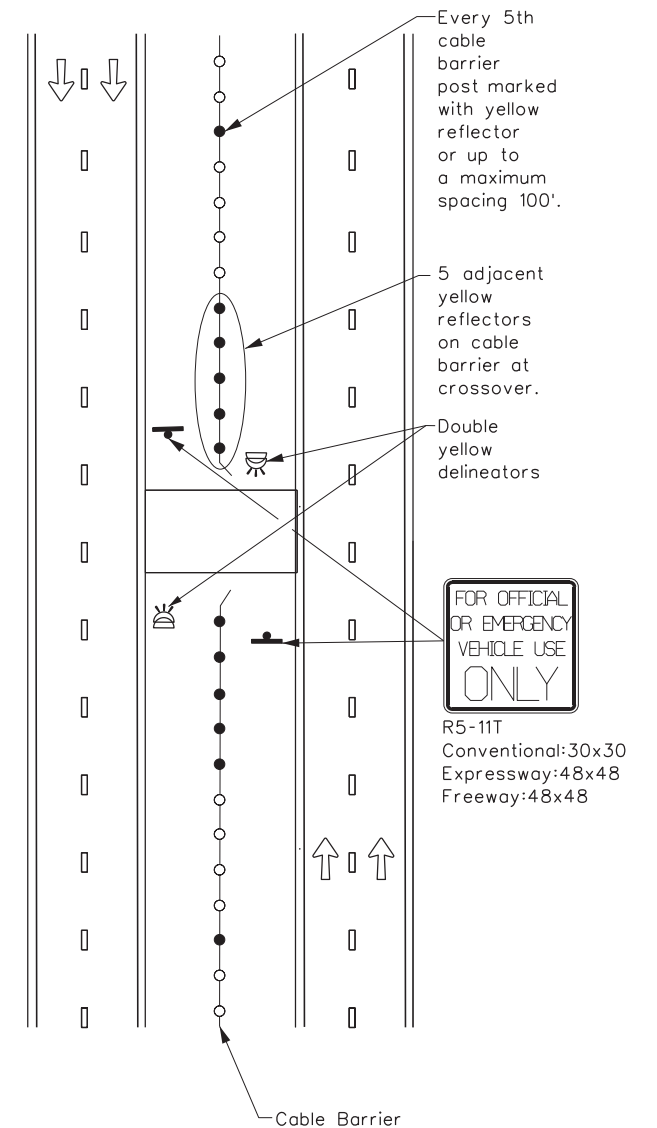

#### NOTES

1. Equal spacing (100' max), but not less than 3 single directional white barrier reflectors or delineators. On Continuous Barrier, equal spacing (100' max.)
2. Equal spacing (100' max), but not less than 3 single directional yellow barrier reflectors or delineators.
3. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

#### LEGEND

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow



## DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

### D & OM(6)-20

FILE: dom6-20.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	6421	35	001	US 287, ETC.
7-20	DIST	COUNTY	SHEET NO.	
	WFS	MONTAGUE, ETC.	79	