

STATE OF TEXAS  
DEPARTMENT OF TRANSPORTATION  
PLANS OF PROPOSED  
STATE HIGHWAY IMPROVEMENT

PROJECT: 6380-24-001  
COUNTY: FALLS  
HIGHWAY: SH 6, ETC.  
CALLOUT CONTRACT

FOR THE PURCHASE OF MATERIALS ONLY, HOT MIX

I HEREBY CERTIFY THAT THE CONSTRUCTION WORK  
ON THIS PROJECT WAS PERFORMED IN SUBSTANTIAL  
COMPLIANCE WITH THE CONTRACT

Note: See project Summary Sheets for complete  
listing of limits, lengths, equations and exceptions

Index of sheets:

- 2. Estimate and Quantity Sheet
- 3A- 3C General Notes
- 4. Summary Sheet

\_\_\_\_\_  
CONTRACTOR NAME:

CONTRACTOR ADDRESS:

DATE WORK BEGAN:


DATE WORK COMPLETED:

DATE WORK ACCEPTED:

RECOMMENDED FOR LETTING:

  
\_\_\_\_\_  
3-25-2021  
DIRECTOR OF OPERATIONS

APPROVED FOR LETTING:

**DocuSigned by:**  
  
\_\_\_\_\_  
3/25/2021  
B69BD796DD564C9...

DISTRICT	COUNTY	HIGHWAY	CONTROL
WACO	FALLS	SH 6, ETC.	6380-24-001

SPECIFICATIONS ADOPTED BY THE TEXAS  
DEPARTMENT OF TRANSPORTATION, NOVEMBER 1,  
2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED  
IN THE CONTRACT SHALL GOVERN ON THIS PROJECT

© 2021 by Texas Dept. of Transportation  
All Rights Reserved.



**COUNTY: FALLS****SHEET 3A****HIGHWAY: SH 6, ETC.****MMC: 6380-24-001****GENERAL**

Contract for supply of Hot Mix Asphalt Concrete Pavement materials at non-site-specific locations within Falls County.

A map of Falls County is included in this contract.

Contractor questions on this project are to be emailed to the Waco District at the following address:

Bill Compton - [Wacoprebid@txdot.gov](mailto:Wacoprebid@txdot.gov), 254-867-2707, 100 S. Loop Dr., Waco, TX  
Carmen Chau - [Wacoprebid@txdot.gov](mailto:Wacoprebid@txdot.gov), 254-867-2794, 100 S. Loop Dr., Waco, TX

All contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:  
<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, MMC/Project Name.

**GENERAL NOTES****ITEM 1 ABBREVIATIONS AND DEFINITIONS:**

This is a Non-Site-Specific Contract as defined in Item 1.3.90.

**ITEM 2: INSTRUCTIONS TO BIDDERS**

This proposed Contract will not include federal funds. Bid tabulations will include stipulations in accordance with 2.11.5.3 "Rubber Additives" and 2.11.5.5 "Home State Bidding Preference".

**ITEM 5: CONTROL OF THE WORK**

Prior to beginning operations, the department will arrange a contract kick-off conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep traveled surfaces used in hauling operations free of dirt or other materials

In accordance with Article 9.2 "Plans Quantity Measurement" plans quantity measurements are not applicable for this contract.

**COUNTY: FALLS****SHEET 3B****HIGHWAY: SH 6, ETC.****MMC: 6380-24-001**

All work on this contract will be scheduled and directed by the following person(s). Payments will be made on a monthly basis for work completed and accepted according to specifications. All payment requests will be directed to the same:

<b>County</b>	<b>Address:</b>	<b>MAINTENANCE SUPERVISOR</b>	<b>TELEPHONE NO.</b>
Falls	5092 Highway 7 East, Marlin, TX 76661	Chad Blansit	254-833-3462

**ITEM 6: CONTROL OF MATERIALS**

This proposed Contract will not include federal funds. Buy Texas stipulations apply in accordance with 6.1.2 "Buy Texas".

**ITEM 8: PROSECUTION AND PROGRESS**

This Project will be Calendar Day in accordance with Article 8.3.1.5.

The Contractor will provide materials that will be (picked up) at the hot mix plant that will be loaded into Department owned trucks or contracted trucks working for the Department, and/or (deliver) material to a designated location as defined in the Work Order as the Contractor's expense.

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

The Contractor will have at least one hot mix plant within a 50-mile radius of the Falls County Maintenance office, and the plant within closest proximity will be the primary source of material provide for (pick up) operations.

Contractor shall provide an afterhours phone number for ordering of material in the case of an emergency.

Time requirements for each Work Order will be indicated on each individual Work Order.

In Accordance with Article 8.6 "Failure to Complete Work on Time" liquidated damages will be charged for failure to complete each Work Order in the specified number of days. The amount assessed per day for liquidated damages will be 5% of the estimated cost of the Work Order, but not to be less than \$250 per day and not to exceed \$1,000 per day.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any of all contracts at the same time.

Notify the Maintenance Section Supervisor or Assistant when encountering any unforeseen delays.

**COUNTY: FALLS****SHEET 3C****HIGHWAY: SH 6, ETC.****MMC: 6380-24-001****ITEM 500: MOBILIZATION**

Mobilization does not apply to this materials contract.

**ITEM 502: BARRICADES, SIGNS, AND TRAFFIC HANDLING**

In accordance with Article 502.4.1.6 "Contracts with Callout Work and Work Orders," this item will not be paid for separately but will be subsidiary to the contract bid items.

Use strobe lights or rotating beacons on all motorized equipment, operating on or adjacent to the road surface.

**ITEM 8011: DENSE GRADE HOT-MIX ASPHALT (SQ)(MATERIAL ONLY)**

All hot-mix materials shall be in SAC B classification.

RAS is not allowed in surface mixes.

Specify Hot Mix Asphalt Concrete (HMAC) or Warm Mix Asphalt(WMA) at the time of design submittal. After design submittal, continue producing the chosen design unless otherwise approved.

RAP from Contractor owned sources may be used if the RAP is fractioned. The course fraction of Contractor owned RAP will not be allowed if it consist primarily of siliceous aggregates.

Perform all sampling for aggregate quality testing on stockpiles at the HMAC plant. Mixture sampling for QC/QA testing will typically be taken from the truck at the plant; however, the Engineer may direct that a sample be taken at any point or location of mixture during production, delivery and placement.


Provide(Material) and Deliver Hot Mix Asphalt Concrete Monday through Friday during daylight hours only.

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.


In addition to the complete destination address, each delivery ticket must be must be accompanied by a packing slip.

Contractors driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

For delivery, only Belly Dump or Flow Boy trailers will be allowed. Type of delivery trailer necessary for operations shall be specified on material order.

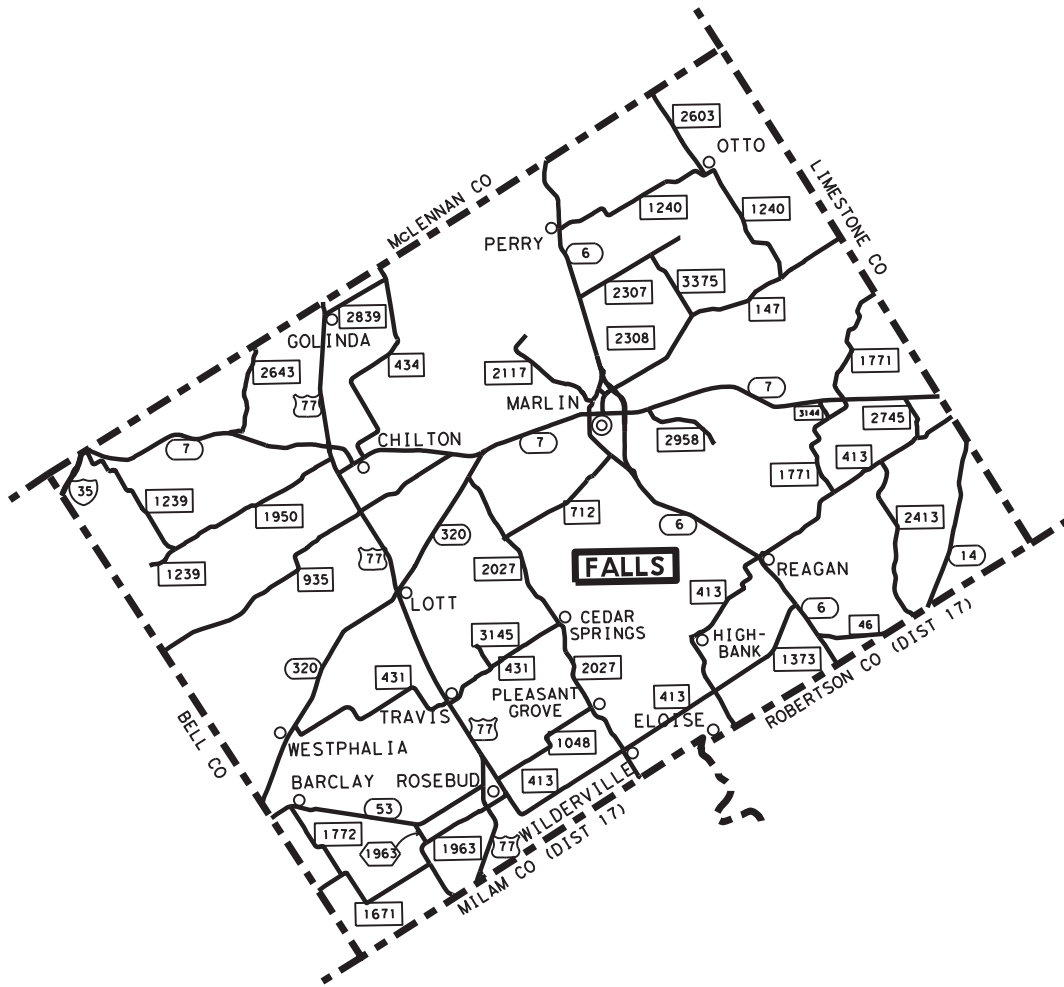

BID CODE	ITEM #	8011	8011	8011	8011
	DESC #	6001	6002	6014	6015
		D-GR HMA (SQ) TY D PG 64-22 (PICKUP)	D-GR HMA (SQ) TY D PG 64-22 (DELIVERY)	D-GR HMA (SQ) TY B PG 64-22 (PICKUP)	D-GR HMA (SQ) TY B PG 64-22 (DELIVERY)
		TON	TON	TON	TON
	FALLS	1,500	7,500	150	150
CONTRACT TOTALS		1,500	7,500	150	150



**QUANTITY SUMMARY  
&  
FALLS COUNTY MAP**

**SHEET 1 OF 1**

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6380	24	001	SH 6, ETC.
	DIST		COUNTY	SHEET NO.
	WACO		FALLS	4