

STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION
PLANS OF PROPOSED

STATE HIGHWAY IMPROVEMENT

PROJECT: MMC 6384-97-001
COUNTY: McLENNAN, ETC
HIGHWAY: US 84, ETC.
CALLOUT CONTRACT

FOR THE PURCHASE OF MATERIALS ONLY:

FLEX BASE, CEMENT TREATED BASE, AGGREGATE FOR SURFACE TREATMENT, & RIPRAP ROCK

I HEREBY CERTIFY THAT THE CONSTRUCTION WORK
ON THIS PROJECT WAS PERFORMED IN SUBSTANTIAL
COMPLIANCE WITH THE CONTRACT

Note: See project Summary Sheets for complete
listing of limits, lengths, equations and exceptions

Index of sheets:

- 2. Estimate & Quantity Sheet
- 3A-3E General Notes
- 4. Project Summary
- 5. Site 1 Quantity Summary & Bell County Map
- 6. Site 2 Quantity Summary & Bosque County Map
- 7. Site 3 Quantity Summary & Coryell County Map
- 8. Site 4 Quantity Summary & Falls County Map
- 9. Site 5 Quantity Summary & Hamilton County Map
- 10. Site 6 Quantity Summary & Hill County Map
- 11. Site 7 Quantity Summary & Limestone County Map
- 12. Site 8 Quantity Summary & McLennan County Map

CONTRACTOR NAME:

CONTRACTOR ADDRESS:

DATE WORK BEGAN:

DATE WORK COMPLETED:


DATE WORK ACCEPTED:

RECOMMENDED FOR LETTING:

APPROVED FOR LETTING:

 6-28-2021

DIRECTOR OF OPERATIONS

DocuSigned by:
 6/28/2021

DISTRICT ENGINEER (WACO)

DISTRICT	COUNTY	HIGHWAY	CONTROL
WACO	McLENNAN, ETC	US 84, ETC.	MMC 6384-97-001

SPECIFICATIONS ADOPTED BY THE TEXAS
DEPARTMENT OF TRANSPORTATION, NOVEMBER 1,
2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED
IN THE CONTRACT SHALL GOVERN ON THIS PROJECT

© 2021 by Texas Dept. of Transportation
All Rights Reserved.

COUNTY: MCLENNAN, ETC.**SHEET 3A****HIGHWAY: US84, ETC.****MMC: 6384-97-001****GENERAL**

Contract for supply of Flex Base, Aggregate for Surface Treatments, Cement Treated Base and Riprap Rock materials at various sites throughout the Waco District.

Site No.	Location/County
1	BELL
2	BOSQUE
3	CORYELL
4	FALLS
5	HAMILTON
6	HILL
7	LIMESTONE
8	MCLENNAN

Contractor questions on this project are to be emailed to the Waco District at the following address:

Bill Compton - Wacoprebid@txdot.gov, 254-867-2707, 100 S. Loop Dr., Waco, TX
 Carmen Chau - Wacoprebid@txdot.gov, 254-867-2794, 100 S. Loop Dr., Waco, TX

All contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:
<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Office of Record: For this contract, the office of record will be the Texas Department of Transportation office listed below. Questions concerning this proposal before or after the award of contract shall be directed to that office and to the attention of the Maintenance Supervisor.

Maint. Supervisor	Telephone Number	Maint. Office Location
Rick Swinson	254-772-1200	7479 Bagby Ave. Waco, TX 76712

GENERAL NOTES**ITEM 1 ABBREVIATIONS AND DEFINITIONS:**

This is a Non-Site-Specific Contract as defined in Item 1.3.90.

COUNTY: McLENNAN, ETC.**SHEET 3B****HIGHWAY: US84, ETC.****MMC: 6384-97-001****ITEM 2: INSTRUCTIONS TO BIDDERS**

This proposed Contract will not include federal funds. Bid tabulations will include stipulations in accordance with 2.11.5.3 "Rubber Additives" and 2.11.5.5 "Home State Bidding Preference".

ITEM 4: SCOPE OF WORK

This contract may be extended per special provision 004-004.

ITEM 5: CONTROL OF THE WORK

Prior to beginning operations, the department will arrange a pre-construction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep travelled surfaces used in hauling operations free of dirt or other materials

In accordance with Article 9.2 "Plans Quantity Measurement" plans quantity measurements are not applicable for this contract.

All work on this contract will be scheduled and directed by the Maintenance Section Supervisors as listed below:

County	Address:	MAINTENANCE SUPERVISOR	TELEPHONE NO.
Bell	410 West Loop 121, BELTON, TX 76513	Jerrold Swift	254-939-3691
Bosque	9167 SH 6 South, MERIDIAN, TX 76663	Christopher Niedorf	254-435-2258
Coryell	3502 East Main, GATESVILLE, TX 76528	Waylon Holden	254-248-4018
Falls	5092 Highway 7 East, MARLIN, TX 76661	Chad Blansit	254-833-3462
Hamilton	1301 East Main (SH 36), HAMILTON, TX 76531	Timothy Massingill	254-386-5512
Hill	1400 S Abbott Ave (US 77), HILLSBORO, TX 76645	Timothy Meeks	254-582-5411
Limestone	3229 SH 14 North, MEXIA, TX 76667	Roger Brooks	254-562-2900
McLennan	7479 Bagby Ave, WACO, TX 76712	Rick Swinson	254-772-1200

COUNTY: MCLENNAN, ETC.

SHEET 3C

HIGHWAY: US84, ETC.

MMC: 6384-97-001

Established sites or alternate locations with equal haul distance, will be the locations for delivery sites. Sites as described are entire counties, delivery locations will be specified on material orders.

ITEM 6: CONTROL OF MATERIALS

This proposed Contract will not include federal funds. Buy Texas stipulations apply in accordance with 6.1.2 "Buy Texas".

This contract will not pay for Material on Hand.

ITEM 8: PROSECUTION AND PROGRESS

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts must be capable and sufficiently staffed to concurrently process and/or execute all contracts at the same time.

This Project will be Calendar Day in accordance with Article 8.3.1.5.

Material requests shall be issued by work order. Each work order shall specify items, quantity and location for material to be delivered along with the starting delivery date of the material.

Time requirements for each Material Order will be indicated on each individual order. Contractor will be given a minimum of 24 hours' notice for Pickup and 48 hours Delivery to successfully complete each Material Order.

In Accordance with Article 8.6 "Failure to Complete Work on Time" liquidated damages will be charged for failure to complete each Work Order in the specified number of days. The amount assessed per day for liquidated damages will be 5% of the estimated cost of the Work Order, but not to be less than \$250 per day and not to exceed \$1,000 per day.

Notify the Maintenance Supervisor or Assistant when encountering any unforeseen delays.

ITEM 9: MEASUREMENT AND PAYMENT

Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in the plans will be requested for pickup and delivery.

In accordance with Article 9.2 "Plans Quantity Measurement" plans quantity measurement does not apply to this contract.

ITEM 500: MOBILIZATION

Mobilization does not apply to this materials contract.

COUNTY: McLENNAN, ETC.

SHEET 3D

HIGHWAY: US84, ETC.

MMC: 6384-97-001

ITEM 502: BARRICADES, SIGNS, AND TRAFFIC HANDLING

In accordance with Article 502.4.1.6 "Contracts with Callout Work and Work Orders," this item will not be paid for separately but will be subsidiary to the contract bid items.

ITEM 8007: FLEXIBLE BASE

Minimum PI is equal to three (3) for all grades, or a minimum Bar Linear Shrinkage of 2%.

RAP may not be incorporated into Flexbase Material

Provide(Material) and Deliver Flexbase Material Monday through Saturday during daylight hours only.

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.

In addition to the complete destination address, each shipment must be accompanied by a packing slip.

Contractors driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

ITEM 8020: RIPRAP

Provide(Material) and Deliver Riprap Rock material Monday through Saturday during daylight hours only.

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.

In addition to the complete destination address, each shipment must be accompanied by a packing slip.

Contractors driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

COUNTY: MCLENNAN, ETC.

SHEET 3E

HIGHWAY: US84, ETC.

MMC: 6384-97-001

ITEM 8031: CEMENT STABILIZED BASE MATERIAL

Provide(Material) and Deliver Cement Stabilized Base material Monday through Saturday during daylight hours only.

Material shall meet the minimum 7-Day unconfined compressive strength specified on the plans.

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.

In addition to the complete destination address, each shipment must be accompanied by a packing slip.

Contractors driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

ITEM 8039: AGGREGATES FOR SURFACE TREATMENTS

Provide(Material) and Deliver Aggregate for Surface Treatment material Monday through Saturday during daylight hours only.


Material provided shall be SAC B or better.

Contact the Maintenance Section Supervisor in each section prior to beginning any delivery activity.


In addition to the complete destination address, each shipment must be accompanied by a packing slip.

Contractors driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

Site No.	Location
1	BELL
2	BOSQUE
3	CORYELL
4	FALLS
5	HAMILTON
6	HILL
7	LIMESTONE
8	MCLENNAN

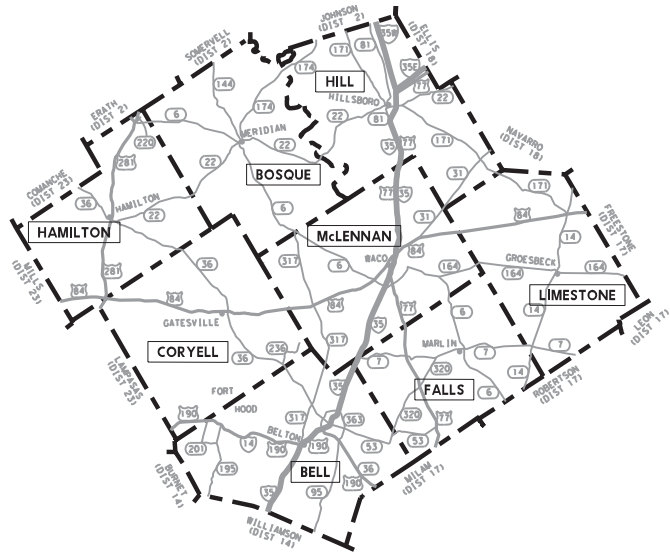

ITEM NO.	DESC. NO.	ITEM DESCRIPTION	UNIT	QTY
8007	6067	FL BS (SITE BEL) (TY A GR 2) (SITE 2)	TON	1000
8007	6068	FL BS (SITE BEL) (TY A GR 2) (SITE 3)	TON	500
8007	6069	FL BS (SITE BEL) (TY A GR 2) (SITE 4)	TON	1000
8007	6070	FL BS (SITE BEL) (TY A GR 2) (SITE 5)	TON	500
8007	6071	FL BS (SITE BEL) (TY A GR 2) (SITE 6)	TON	1500
8007	6073	FL BS (SITE BEL) (TY A GR 2) (SITE 8)	TON	750
8020	6005	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 1)	CY	385
8020	6006	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 2)	CY	962
8020	6009	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 5)	CY	800
8020	6011	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 7)	CY	500
8020	6012	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 8)	CY	1924
8020	6050	RIPRAP (DEL) (STON PROT) (12 IN) (SITE 2)	CY	125
8020	6051	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 3)	CY	962
8020	6052	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 4)	CY	1000
8020	6053	RIPRAP (DEL) (STON PROT) (18 IN) (SITE 6)	CY	1000
8020	6054	RIPRAP (DEL) (STON PROT) (24 IN) (SITE 4)	CY	2000
8020	6055	RIPRAP (DEL) (STON PROT) (24 IN) (SITE 6)	CY	1500
8020	6056	RIPRAP (DEL) (STON PROT) (24 IN) (SITE 7)	CY	200
8031	6001	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (DEL)	TON	2450
8031	6002	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (DEL)	TON	800
8039	6484	AGGR (TY-B) (GR 4) (DEL) (VEH) (SITE 8)	TON	600
8039	6485	AGGR (TY-B) (GR 5) (DEL) (VEH) (SITE 8)	TON	200




Texas Department of Transportation


PROJECT SUMMARY

SHEET 1 OF 1

© TxDOT 2021		CONT	SECT	JOB	HIGHWAY
		6384	97	001	US 84, ETC.
		DIST	COUNTY		SHEET NO.
		WACO	MCLENNAN		4

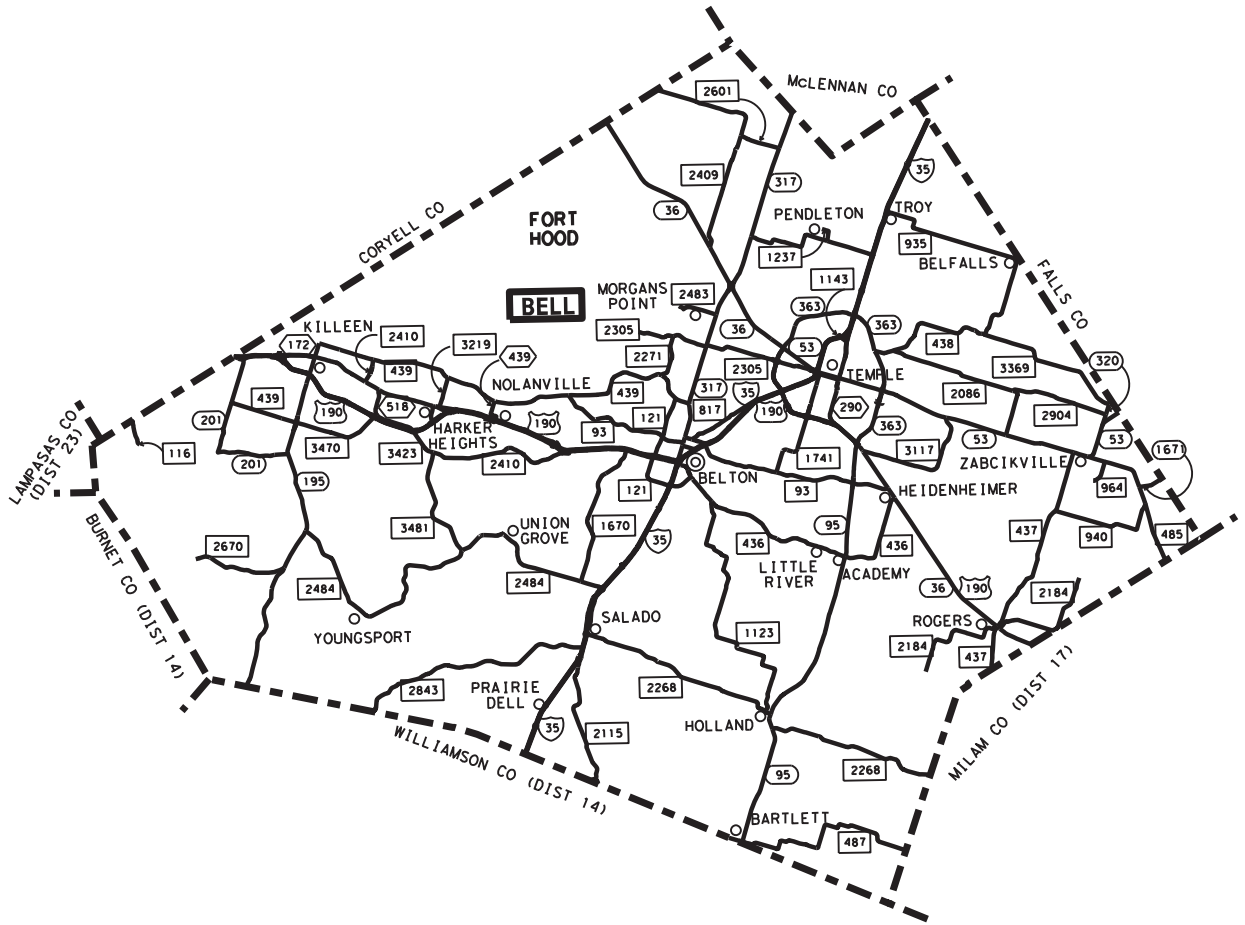


ITEM NO.	8020
DESC NO.	6005
ITEM DESCRIPTION	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 1)
UNIT	CY
QTY	385
TOTAL	385




**SITE 1
QUANTITY SUMMARY
&
BELL COUNTY MAP**

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST		COUNTY	SHEET NO.
	WACO		MCLENNAN, ETC.	5

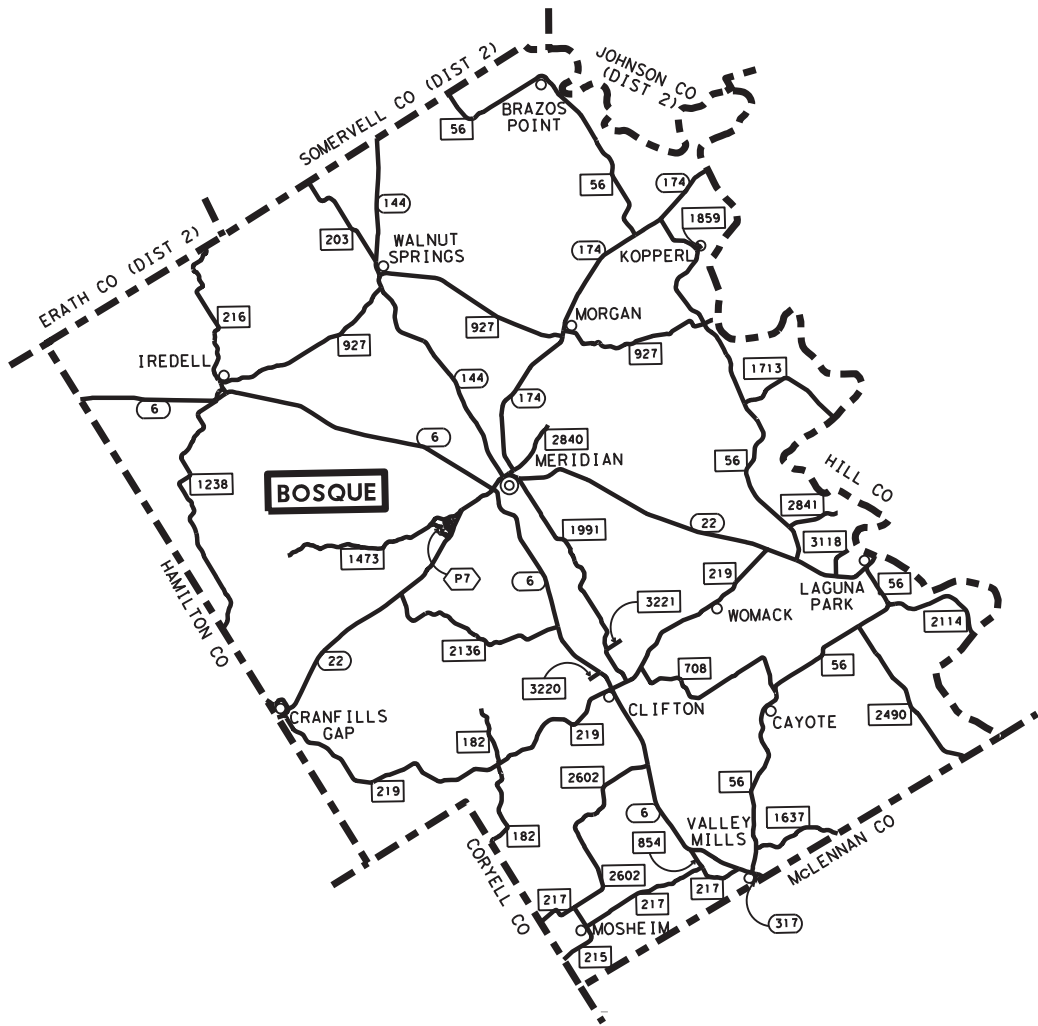

ITEM NO.	8007	8020	8020
DESC NO.	6067	6006	6050
ITEM DESCRIPTION	FL BS (SITE DEL) (TY A GR 2) (SITE 2)	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 2)	RIPRAP (DEL) (STONE PROT) (12 IN) (SITE 2)
UNIT	TON	CY	CY
QTY	1000	962	125
TOTAL	1000	962	125




Texas Department of Transportation

SITE 2
QUANTITY SUMMARY
&
BOSQUE COUNTY MAP

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST COUNTY			SHEET NO.
	WACO MCLENNAN, ETC.			6

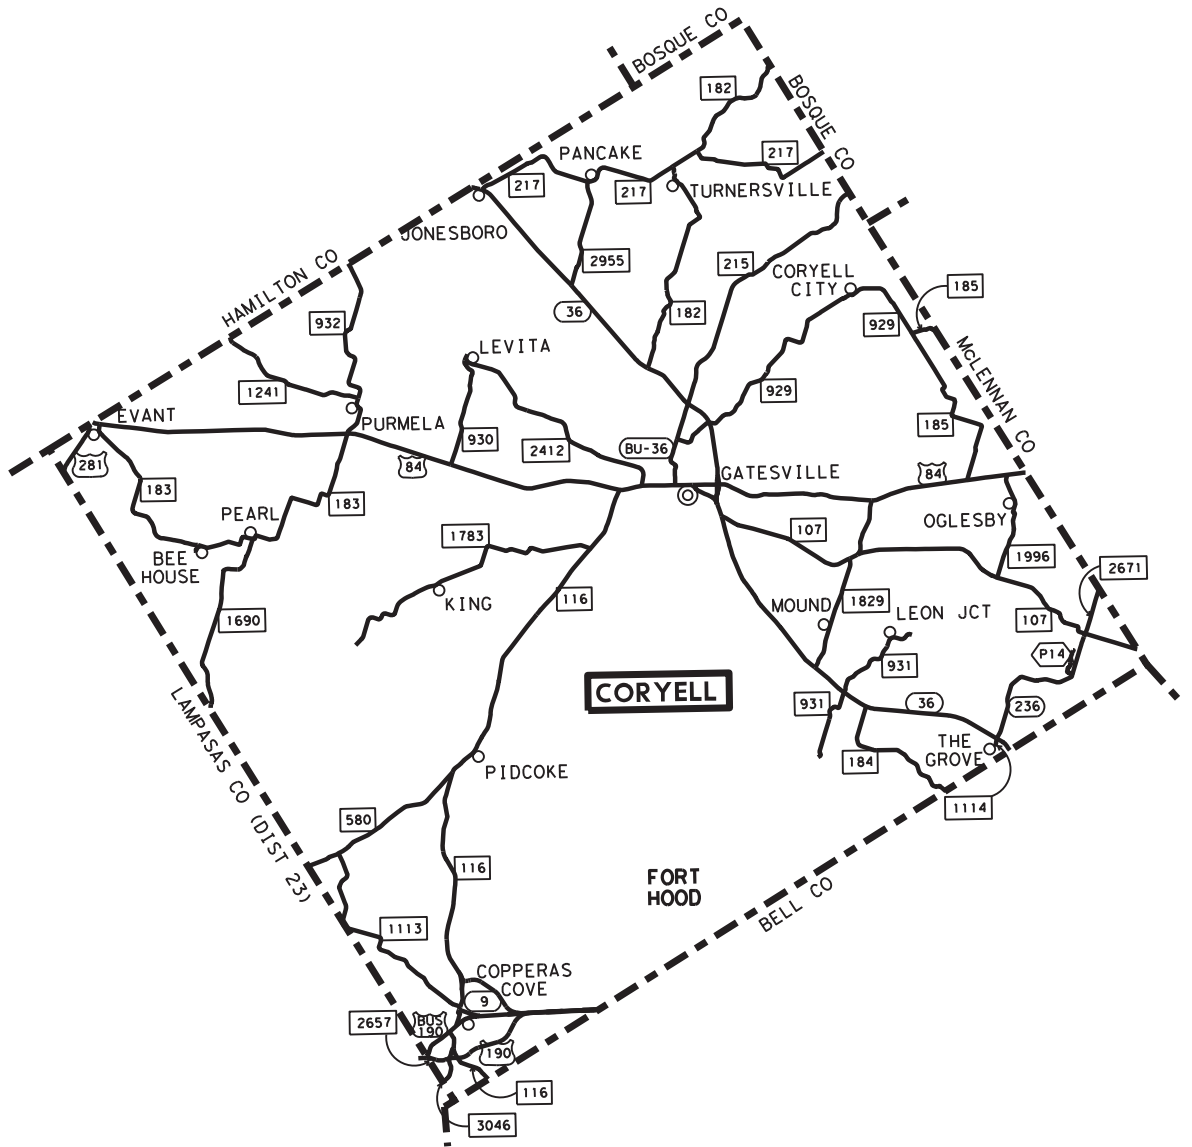


ITEM NO.	8007	8020	8031
DESC NO.	6068	6051	6001
ITEM DESCRIPTION	FL BS (SITE DEL) (TY A GR 2) (SITE 3)	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 3)	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (DEL)
UNIT	TON	CY	TON
QTY	500	962	250
TOTAL	500	962	250

Texas Department of Transportation


SITE 3
QUANTITY SUMMARY
&
CORYELL COUNTY MAP

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST	COUNTY		SHEET NO.
	WACO	MCLENNAN, ETC.		7

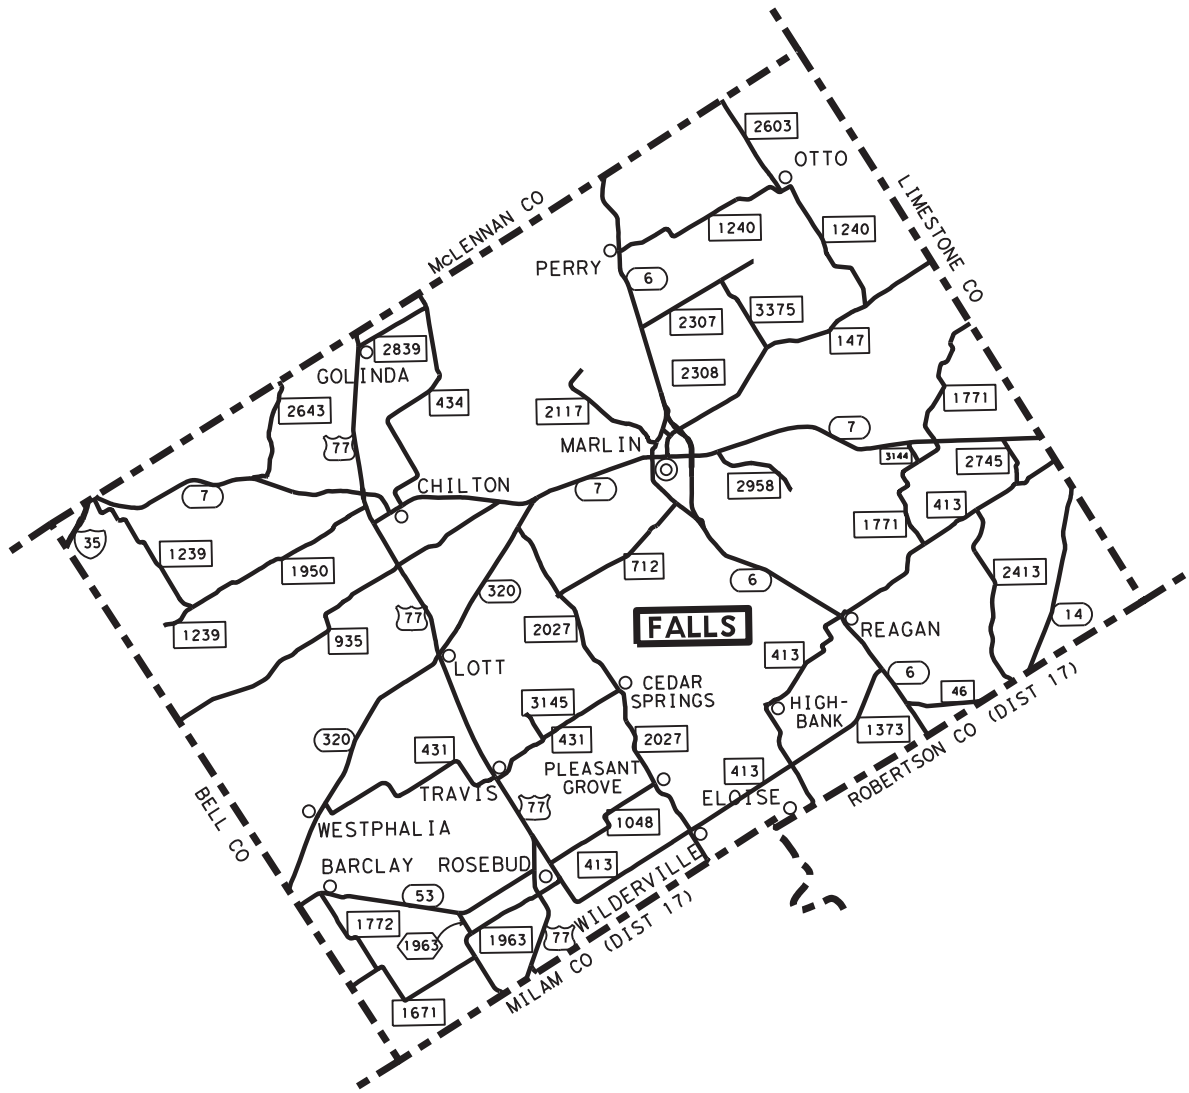


ITEM NO.	8007	8020	8020	8031	8031
DESC NO.	6069	6052	6054	6001	6002
ITEM DESCRIPTION	FL BS (SITE DEL) (TY A GR 2) (SITE 4)	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 4)	RIPRAP (DEL) (STONE PROT) (24 IN) (SITE 4)	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (DEL) (SITE 4)	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (PKUP) (SITE 4)
UNIT	TON	CY	CY	TON	TON
QTY	1000	1000	2000	100	200
TOTAL	1000	1000	2000	100	200

 Texas Department of Transportation


SITE 4
QUANTITY SUMMARY
&
FALLS COUNTY MAP

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST	COUNTY		SHEET NO.
	WACO	MCLENNAN, ETC.		8

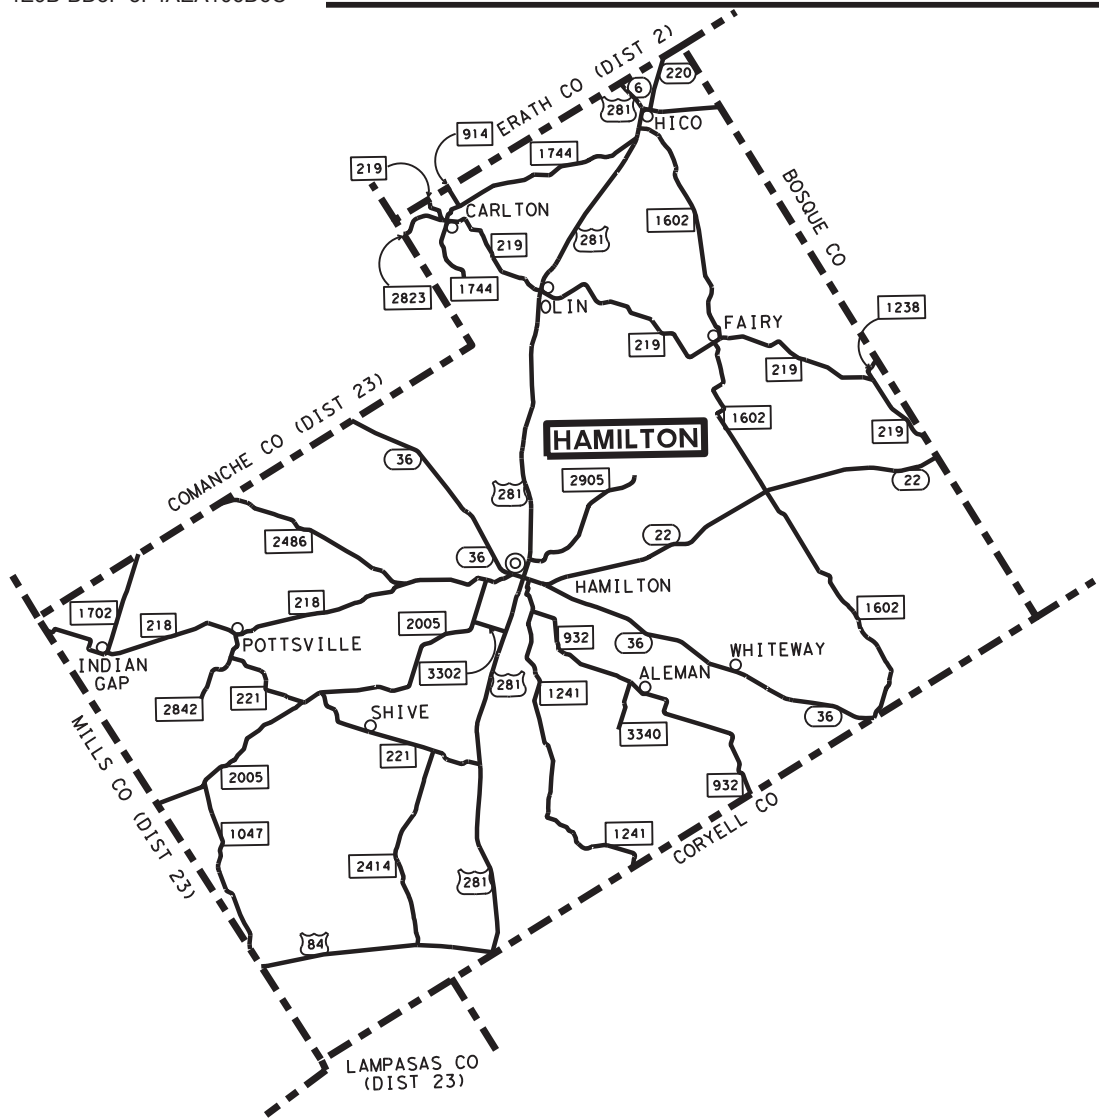


ITEM NO.	8007	8020
DESC NO.	6070	6009
ITEM DESCRIPTION	FL BS (SITE DEL) (TY A GR 2) (SITE 5)	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 5)
UNIT	TON	CY
QTY	500	800
TOTAL	500	800


Texas Department of Transportation


SITE 5
QUANTITY SUMMARY
&
HAMILTON COUNTY MAP

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST			SHEET NO.
	WACO			MCLENNAN, ETC. 9

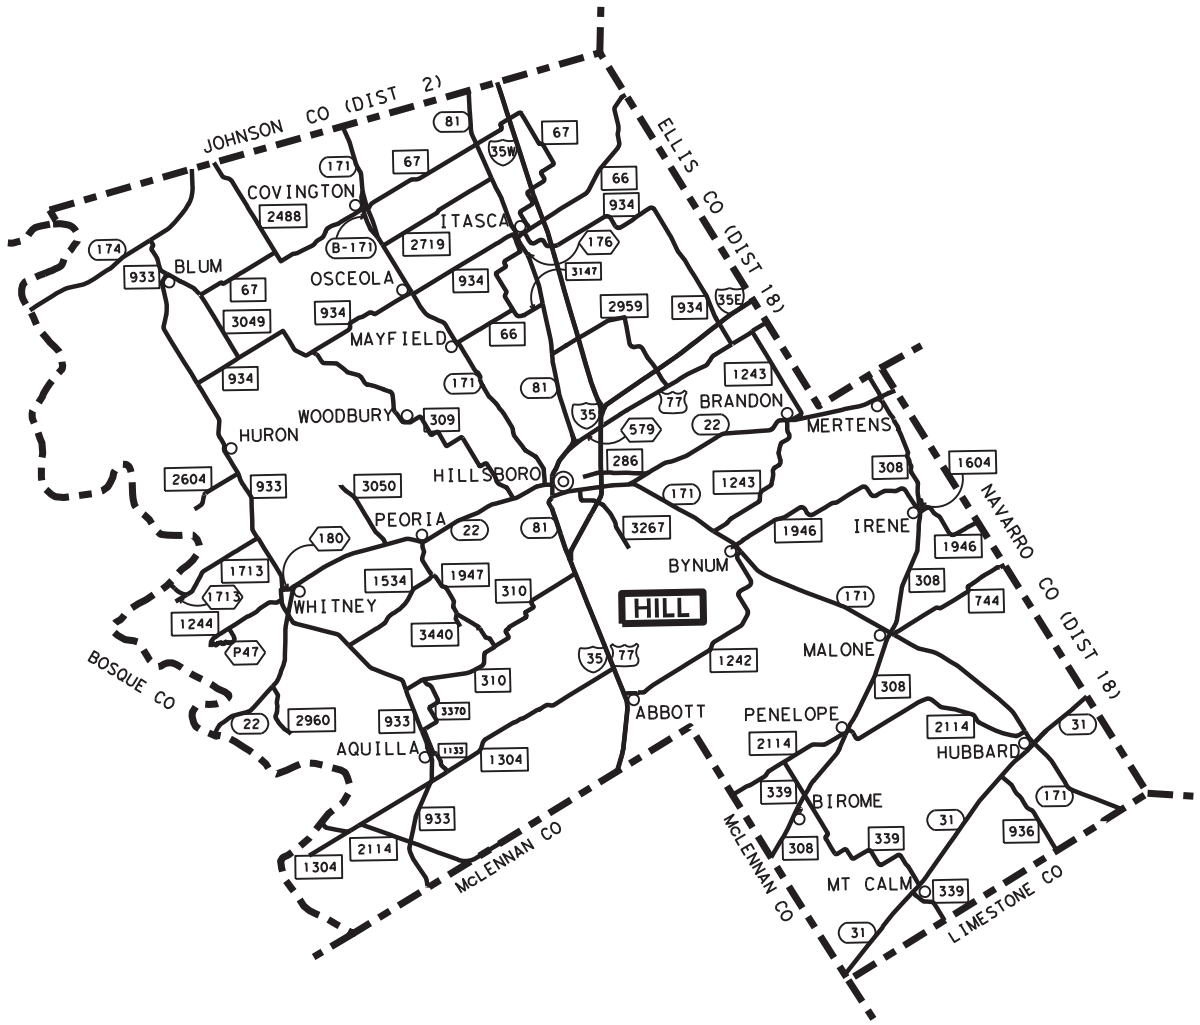


ITEM NO.	8007	8020	8020	8031	8031
DESC NO.	6071	6053	6055	6001	6002
ITEM DESCRIPTION	FL BS (SITE DEL) (TY A GR 2) (SITE 6)	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 6)	RIPRAP (DEL) (STONE PROT) (24 IN) (SITE 6)	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (DEL)	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (PKUP)
UNIT	TON	CY	CY	TON	TON
QTY	1500	1000	1500	500	100
TOTAL	1500	1000	1500	500	100

 Texas Department of Transportation


SITE 6
QUANTITY SUMMARY
&
HILL COUNTY MAP

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST	COUNTY		SHEET NO.
	WACO	MCLENNAN, ETC.		10

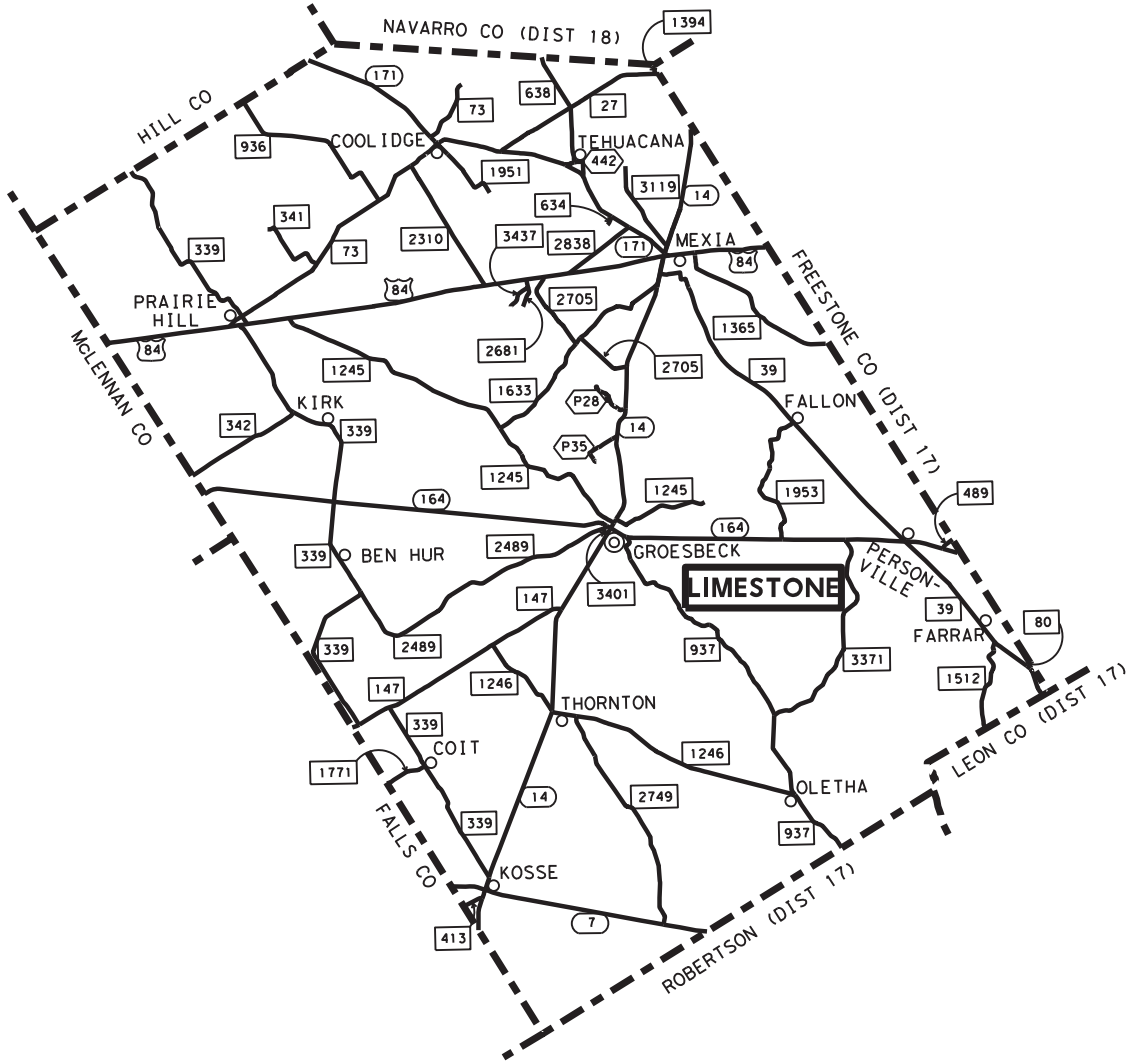


ITEM NO.	8020	8020
DESC NO.	6011	6056
ITEM DESCRIPTION	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 7)	RIPRAP (DEL) (STONE PROT) (24 IN) (SITE 7)
UNIT	CY	CY
QTY	500	200
TOTAL	500	200

 Texas Department of Transportation


SITE 7
QUANTITY SUMMARY
&
LIMESTONE COUNTY MAP

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST	COUNTY		SHEET NO.
	WACO	MCLENNAN, ETC.		11

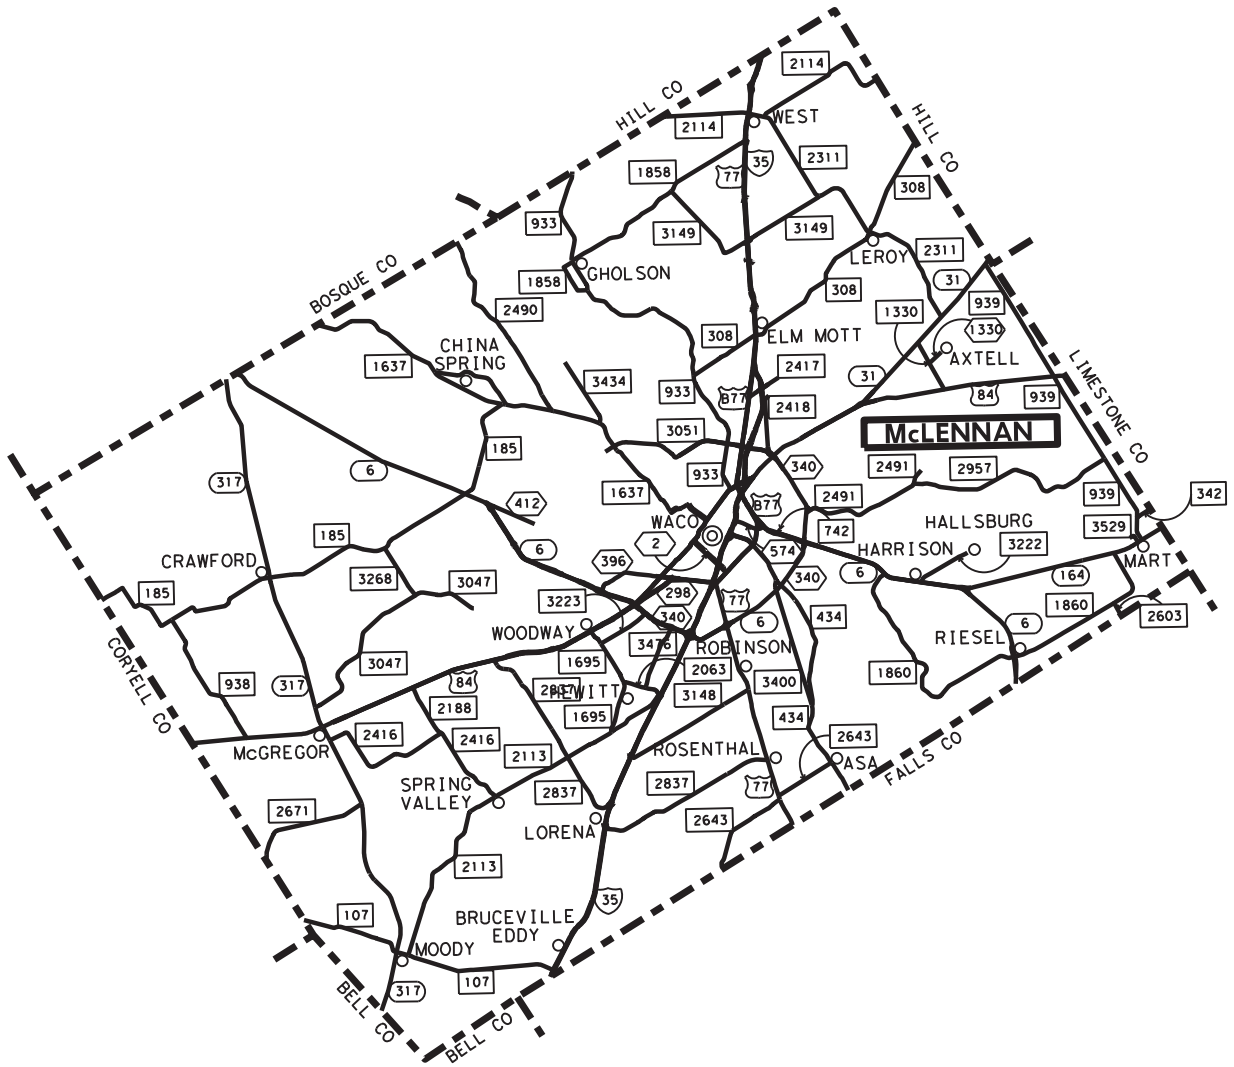

ITEM NO.	8007	8020	8031	8031	8039	8039
DESC NO.	6073	6012	6001	6002	6484	6485
ITEM DESCRIPTION	FL BS (SITE DEL) (TY A GR 2) (SITE 8)	RIPRAP (DEL) (STONE PROT) (18 IN) (SITE 8)	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (DEL)	CM TRT (PT MX) (CL M) (TY A) (GR1-2) (PKUP)	AGGR (TY-B) (GR-4) (DEL) (VEH) (SITE 8)	AGGR (TY-B) (GR-5) (DEL) (VEH) (SITE 8)
UNIT	TON	CY	TON	TON	TON	TON
QTY	750	1924	1500	500	600	200
TOTAL	750	1924	1500	500	600	200

 Texas Department of Transportation

SITE 8
QUANTITY SUMMARY
&
MCLENNAN COUNTY MAP

SHEET 1 OF 1

© TxDOT 2021	CONT	SECT	JOB	HIGHWAY
	6384	97	001	US 84, ETC.
	DIST	COUNTY		SHEET NO.
	WACO	MCLENNAN, ETC.		12