

STATE OF TEXAS

DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC 638792001
 CSJ: 6387-92-001
 HIGHWAY: IH0027
 LIMITS OF WORK: LUBBOCK DISTRICT (SOUTH)


FOR PURCHASE AND DELIVERY OF MATERIALS ONLY: DENSE-GRADED HOT-MIX ASPHALT (SMALL QUANTITY)

SUBMITTED FOR
 LETTING: 9/22/2021
 Date

APPROVED FOR
 LETTING: 9/22/2021
 Date

DocuSigned by:


 EF7CC9091205430... SPECIALIST

DocuSigned by:

 BC3D76BE5B2B4F2... INTENANCE

INDEX OF SHEETS

1	TITLE SHEET
2A-2D	GENERAL NOTES
3	ESTIMATE & QUANTITY SHEET
4	PLAN SUMMARY

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.

© 2021		 Texas Department of Transportation	
FED.RD. DIV. NO.	PROJECT NO.	SHEET NO.	
6	MMC 638792001	1	
STATE	DISTRICT	COUNTY	
TEXAS	LUBBOCK	LUBBOCK	
CONTROL	SECTION	JOB	HWY NO.
6387	92	001	IH0027
FILENAME			DATE
MMC_638792001			9/21/2021

Project Number: MMC 638792001

Sheet 2

County: Lubbock

Control: 6387-92-001

Highway: IH 27

GENERAL NOTES:

Contractor questions on this project are to be emailed to the following individual(s):

Mike Stroope, P.E., Director of Maintenance
mike.stroope@txdot.gov

Contractor questions will only be accepted through email to the above individual(s).

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

General Requirements and Covenants - Items 1 thru 9

Project Description – This project shall consist of the purchase and delivery of materials only, Dense-Graded Hot-Mix (Small Quantity) Lubbock District South. Materials shall be delivered for TxDOT offices listed below to any roadway within the section limits. Pickup items may be used by any section in the Lubbock District South contract.

Lubbock NE Maintenance Supervisor

Manuel DeLaCruz
2710 E Municipal Dr.
Lubbock, TX 79403
PH (806) 763-8137

Lubbock SE Maintenance Supervisor

Cory Jackson
2720 E Slaton Hwy
Lubbock, TX 79404
PH (806) 745-4688

Terry County Maintenance Supervisor

Jaime Cortez
800 W Webb St.
Brownfield, TX 79316
PH (806) 637-8913

Project Number: MMC 638792001

Sheet 2

County: Lubbock

Control: 6387-92-001

Highway: IH 27

Dawson County Maintenance Supervisor

Shi Dotson
1613A N Hwy 87
Lamesa, TX 79336
PH (806) 872-2175

Garza County Maintenance Supervisor

Robert Hansen
705 S Broadway
Post, TX 79356
PH (806) 495-2245

Gaines County Maintenance Supervisor

George Deleon
175 E US 180
Seminole, TX 79360
PH (806) 758-3632

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Item 2 – Instructions to Bidders

View the plans on-line or download from the web at:

<http://www.dot.state.tx.us/business/plansonline/plansonline.htm>

Order plans from any of the plan reproduction companies shown on the web at:

http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm

By signing this proposal, a bidder acknowledges that he/she has a copy of the “Standard Specifications for Construction of Highways, Streets and Bridges”, adopted by the Texas Department of Transportation, November 1, 2014. This specification book may be purchased from the Department.

Item 3 – Award and Execution of Contract

Material requests shall be issued by Work Order. Each Work Order shall specify items, quantities and locations to be delivered as well as days to complete Work Order. This contract is for small quantities only. A work order will be issued to the contractor a minimum of 24 hours

Project Number: MMC 638792001**Sheet 2****County:** Lubbock**Control:** 6387-92-001**Highway:** IH 27

in advance and the contractor shall be able to provide a minimum of 75 tons per day unless agreed upon in advance between the section and the contractor.

Item 4 – Scope of Work

This contract may be extended per Special Provision 004-004.

Item 6 – Control of Materials

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website:

<https://www.txdot.gov/business/resources/producer-list.html>

Item 8 - Prosecution and Progress

Contract time charges shall begin upon issuance of “Authorization to Begin Work” letter. One hundred and twenty (120) Working Days have been designated for this contract. Working Days shall be computed and charged in accordance with Article 8.3.1.5 “Calendar Day.”

Individual Work Order charge days shall run concurrently with Contract time charges.

In accordance with Article 8.6 “Failure to Complete Work on Time,” liquidated damages shall be charged for failure to complete each Work Order in the specified number of days. The amount assessed per day for liquidated damages shall be 5% of the estimated cost of the Work Order, not to be less than \$250 per day and not to exceed \$1000 per day.

Item 9 – Measurement and Payment

In accordance with Article 9.2 “Plans Quantity Measurement,” plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for delivery. Maintenance Sections may request quantities varying from those shown in the plans to meet their needs.

Item 8011 – Dense-Graded Hot-Mix (Small Quantity)

The contractor shall provide hot-mix using PG binder 64-22. Binder substitution is not allowed. It is the Engineer’s discretion to accept a different material if the contractor is producing a superior product.

The use of Recycled Asphalt Shingles (RAS) will not be permitted on this contract.

Project Number: MMC 638792001

Sheet 2

County: Lubbock

Control: 6387-92-001

Highway: IH 27

Supply aggregate on this contract that meets surface aggregate classification (SAC) B or better.

A 2-hour unload time per truck, not including travel time, shall be included in the bid price. If a truck remains on the site longer than 2 hours, due to no fault of the contractor, each additional 15 minutes shall be compensated at \$20 per 15-minute period per truck. If a load is more than 2-hours late, due to no fault of TxDOT, each additional 15 minutes shall result in a deduction of \$20 per 15-minute period per truck.


Delivery to section or roadway shall be by Belly-Dump style haul truck. Any deviation in truck type shall be agreed upon between the section and the producer at time of work order.

ESTIMATE SUMMARY

ITEM- CODE	DESCRIPTION		U N I T	TOTAL	
				EST.	FINAL
ITEM NO	DESC CODE	SP NO			
8011	6001		D-GR HMA(SQ) TY D PG 64-22 (PICKUP)	TON	1000.000
8011	6011		D-GR HMA(SQ) TY D PG 64-22 (DLVR) SITE 1	TON	250.000
8011	6014		D-GR HMA(SQ) TY B PG 64-22 (PICKUP)	TON	250.000
8011	6015		D-GR HMA(SQ) TY B PG 64-22 (DELIVERY)	TON	250.000
8011	6016		D-GR HMA(SQ) TY C PG 64-22 (PICKUP)	TON	1000.000
8011	6044		D-GR HMA(SQ) TY C PG 64-22 (DEL)(SITE 1)	TON	1000.000
8011	6045		D-GR HMA(SQ) TY C PG 64-22 (DEL)(SITE 2)	TON	1000.000
8011	6046		D-GR HMA(SQ) TY C PG 64-22 (DEL)(SITE 3)	TON	200.000
8011	6048		D-GR HMA(SQ) TY C PG 64-22 (DEL)(SITE 5)	TON	200.000
8011	6050		D-GR HMA(SQ) TY D PG 64-22 (DLVR) SITE 4	TON	250.000
8011	6051		D-GR HMA(SQ) TY C PG 64-22 (DEL)(SITE 6)	TON	200.000

ESTIMATE & QUANTITY SHEET

STATE DIST. NO. 5	COUNTY LUBBOCK	PROJECT NO. MMC 638792001	SHEET NO. 3
----------------------	-------------------	------------------------------	----------------

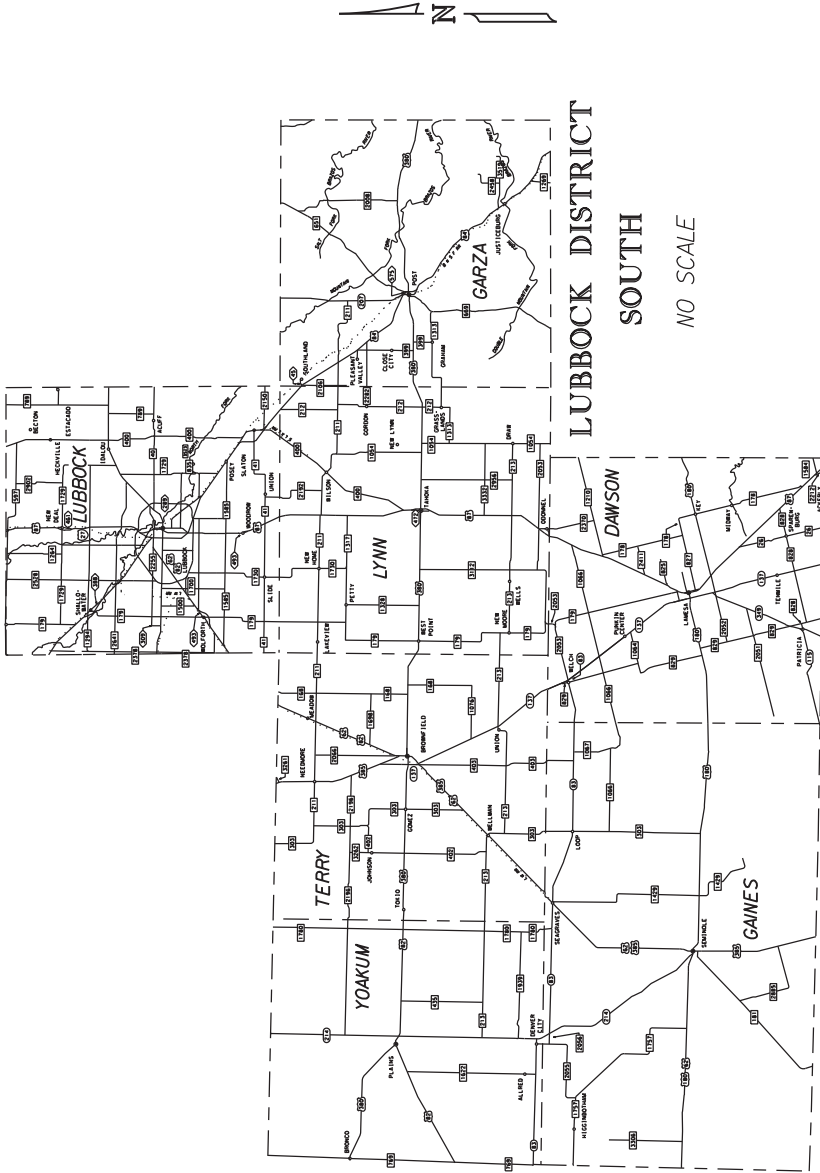

Site	Section	County	Maintenance Offices	Address	8011-6001 D-GR HMA(SQ) TY D PG 64-22 (PICKUP) TON	8011-60XX D-GR HMA(SQ) TY D PG 64-22 (DLVR) SITE X TON	8011-6014 D-GR HMA(SQ) TY B PG 64-22 (PICKUP) TON	8011-6015 D-GR HMA(SQ) TY B PG 64-22 (DELIVERY) TON	8011-6016 D-GR HMA(SQ) TY C PG 64-22 (PICKUP) TON	8011-60XX D-GR HMA(SQ) TY C PG 64-22 (DEL)(SITE X) TON
1	LBB NE	Lubbock		2710 E Municipal Dr Lubbock, TX 79403		250				1000
2	LBB SE	Lubbock		2720 E Slaton Hwy Lubbock, TX 79404						1000
3	Brownfield	Terry		800 W Webb St Brownfield, TX 79316						200
4	Lamesa	Dawson		1613A N Hwy 87 Lamesa, TX 79331		250		250		200
5	Post	Garza		705 S Broadway Post, TX 79356						200
6	Seminole	Gaines		175 E US 180 Seminole, TX 79360	1000					200
All Sections May Issue Work Order For Pickup At Plant Location					1000					
Total					1000	500	250	250	1000	2600

Note: Estimated quantities in table are for bidding purposes only. They represent an average quantity by section for a given 120 day period. Each section may choose to order more or less of each type of material based on changing conditions and plans.

FED. RD. DIV. NO.	MAINTENANCE PROJECT NO.		SHEET NO.
06	MMC 638792001		4
STATE TX	STATE DIST. NO. 05	COUNTY LUBBOCK	
CONT. 6387	SECT. 92	JOB 001	HIGHWAY NO. 1H0027

PLAN SUMMARY