

CONT	SECT	JOB	HIGHWAY
6404	64	001	US 281, ETC.
DIST	COUNTY		SHEET NO.
AUS	BLANCO, ETC.		1

# STATE OF TEXAS

## DEPARTMENT OF TRANSPORTATION


---

### PLANS OF PROPOSED MATERIALS MAINTENANCE CONTRACT MATERIALS ONLY

PROJECT NUMBER  
MMC 640464001

**BLANCO, ETC**  
**US 281, ETC**

LIMITS: VARIOUS COUNTIES INCLUDING  
BLANCO, BURNET, GILLESPIE, LLANO, AND MASON  
FOR THE DELIVERY OF MATERIAL  
CONSISTING OF HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT

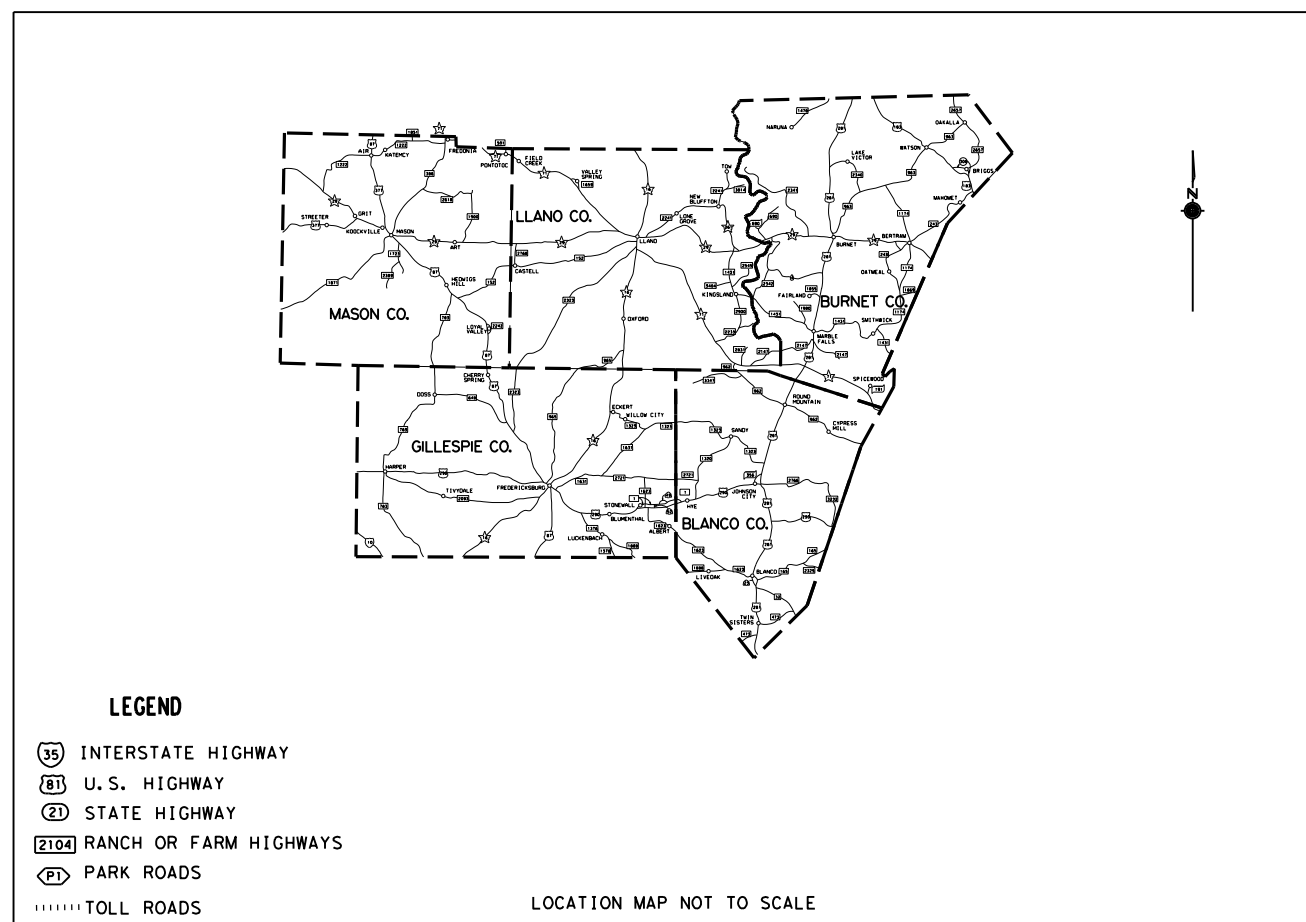

EXCEPTIONS: NONE  
EQUATIONS: NONE  
RAILROAD CROSSINGS: NONE

SUBMITTED FOR LETTING: 6/23/2022

DocuSigned by:  
*Susana Ceballos P.E.*  
E1816167B5C7414  
DISTRICT MAINTENANCE ENGINEER

SUBMITTED FOR LETTING: 6/23/2022

DocuSigned by:  
*Jacob Wells*  
03D704AB5F08458  
DISTRICT MAINTENANCE ADMINISTRATOR

APPROVED FOR LETTING: 6/23/2022

DocuSigned by:  
*Omar X. De Leon, P.E.*  
D18DBE2B94AF4FA  
DIRECTOR OF OPERATIONS

FILE: \$FILE\$ DATE: \$DATE\$ \$TIMES

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION ON NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT.



**GENERAL**

- 1 TITLE SHEET
- 2 INDEX OF SHEETS
- 3, 3A GENERAL NOTES
- 4 QUANTITY SHEET
- 5 LOCATION SUMMARY

**Austin District  
Maintenance Office**



**INDEX OF SHEETS**

© 2019		CONT	SECT	JOB	HIGHWAY
DS:	CK:	6404	64	001	US 281, ETC
		DIST	COUNTY		SHEET NO.
DR:	CK:	AUS	BLANCO, ETC		2

**Project Number:** MMC 640464001

**County:** Blanco, etc.

**Highway:** US 281, etc.

**Sheet: 3**

**Control:** 6404-64-001

GENERAL NOTES:

### GENERAL

Contractor questions on this project are to be addressed to the following individual(s):

Pre Bid Contact List

District Maintenance            [Susana.Ceballos@txdot.gov](mailto:Susana.Ceballos@txdot.gov)

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting%20Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Written notice will be given to begin work on this project.

Work must begin within seven (7) calendar days after such notification. Time charges will begin when work begins regardless if it falls within seven (7) calendar days of the notification to begin work.

The contractor will have **“One hundred twenty” (120)** calendar days to complete all work under this contract.

Work under this contract consists of **“Hot Mix Cold Laid Material Delivery”** at various locations in **“Blanco, Burnet, Gillespie, Llano, and Mason Counties”**.

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

Each contract is considered separate and individual from others. Requirements to complete work on any or all contracts may occur at the same time. If requests are issued at the same time, it is expected that the work will be completed in the time frame allowed.

**Project Number:** MMC 640464001

**County:** Blanco, etc.

**Highway:** US 281, etc.

**Sheet: 3**

**Control:** 6404-64-001

Material orders and delivery are expected to be fulfilled no later than 21 calendar days after request for material is made. Delivery of materials will be coordinated by the responsible Maintenance Supervisor:

Blanco	Scott D. Scott	830-868-7166	<a href="mailto:Scott.Scott@txdot.gov">Scott.Scott@txdot.gov</a>
Burnet	Chris Hall	512-756-2316	<a href="mailto:Christopher.Hall@txdot.gov">Christopher.Hall@txdot.gov</a>
Gillespie	James Low	325-247-5146	<a href="mailto:James.Low@txdot.gov">James.Low@txdot.gov</a>
Llano	James Low	325-247-5146	<a href="mailto:James.Low@txdot.gov">James.Low@txdot.gov</a>
Mason	Cole Farmer	325-347-6447	<a href="mailto:Cole.Farmer@txdot.gov">Cole.Farmer@txdot.gov</a>

### ITEM 3 – AWARD AND EXECUTION OF CONTRACT

A work order will be issued to the contractor for specific items and quantities to be delivered as well as days to complete the work order and expected delivery date. The contractor will contact the responsible maintenance supervisor on the delivery date confirming delivery time.

This Contract includes non-site specific work. Multiple work orders will be used to procure work of the type identified in the Contract at locations that have not yet been determined.

### ITEM 6 - CONTROL OF MATERIALS

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website: <https://www.txdot.gov/business/resources/producer-list.html>

The Contractor is responsible for furnishing all materials included in this contract. Materials provided by Contractor will be new unless otherwise shown on the plans or approved. The Contractor must receive approval from the Engineer prior to ordering materials for this contract.

The Contractor is required to have sufficient supply of material to deliver within the allotted time.

All deliveries shall maintain a minimum of 100 tons per day once delivery has commenced.

Give a minimum of 1 business day notice for materials, which require inspection at the Plant.

Furnish uncontaminated materials of uniform quality that meet the requirements of the plans and specifications. Materials may be rejected if evidence of contamination is present. Additional sampling for acceptance may be required.

Delivery of material will not be accepted without scale certifications and tested/approved material received 48 hours prior to scheduled delivery.

### ITEM 8 – PROSECUTION AND PROGRESS

Time charges will be in accordance with Article 8.3.1.5 “Calendar Day”.

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages shall be charged each day for failure to meet each work order. This will include:

**Project Number:** MMC 640464001

**County:** Blanco, etc.

**Highway:** US 281, etc.

**Sheet:** 3A

**Control:** 6404-64-001

Sheet: 3A

Control: 6404-64-001

1. Failure to deliver at the starting date or continually progress on the work order.
2. Failure to deliver the required materials per day.
3. Failure to complete work order within 3 weeks (21 calendar days) from the issue date on work order.

The amount assessed per day for liquidated damages shall be 1 % of the estimated cost of the work order, not to be less than \$200 per day and not to exceed \$500 per day.

#### **ITEM 9 – MEASUREMENT AND PAYMENT**

In accordance with Article 9.1, "Measurement of Quantities," furnish the tare and maximum gross weights as well as the volume capacity of all vehicles, trucks, truck-tractors, trailers, semitrailers, or combination of such vehicles used to deliver materials for the contract. Also, furnish calculations supporting these weights and capacities. Provide all measurements required for pay a minimum of 2 days before the equipment is used.

In accordance with Article 9.2 "Plans Quantity Measurement," plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for delivery.

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

#### **ITEM 520 – WEIGHING AND MEASURING EQUIPMENT**

A daily summary spreadsheet will be required for all material delivered.

#### **SS 8013 – HOT-MIX COLD LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY)**

Use SAC B or better AC-0.6 for this Item.

Transport truck will deliver material with an end dump trailer/belly dump as specified in the work orders.



# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6404-64-001

DISTRICT Austin  
HIGHWAY US0281


COUNTY Blanco

CONTROL SECTION JOB				6404-64-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00187982			
COUNTY				Blanco			
HIGHWAY				US0281			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8013-6009	HMCL ACP TYPE D (DELIVERY)(SITE 1)	TON	4,000.000		4,000.000	
	8013-6010	HMCL ACP TYPE D (DELIVERY)(SITE 2)	TON	5,000.000		5,000.000	
	8013-6011	HMCL ACP TYPE D (DELIVERY)(SITE 3)	TON	5,000.000		5,000.000	
	8013-6012	HMCL ACP TYPE D (DELIVERY)(SITE 4)	TON	3,000.000		3,000.000	
	8013-6013	HMCL ACP TYPE D (DELIVERY)(SITE 5)	TON	5,000.000		5,000.000	

SUMMARY OF MATERIALS QUANTITIES										
ITEM NO.	DESC.	CODE	8013-6009	8013-6010	8013-6011	8013-6012	8013-6013			
LOCATION	MAINTENANCE SECTION		HMCL ACP TY D DEL SITE 1	HMCL ACP TY D DEL SITE 2	HMCL ACP TY D DEL SITE 3	HMCL ACP TY D DEL SITE 4	HMCL ACP TY D DEL SITE 5			
		TON	TON	TON	TON	TON				
Blanco County	Blanco		4000							
Burnet County	Burnet			5000						
Gillespie County	Gillespie				5000					
Llano County	Llano					3000				
Mason County	Mason						5000			
TOTAL			4000	5000	5000	3000	5000			

FOR THE PURPOSES OF THIS CONTRACT THE DELIVERY SITES ARE DEFINED AS FOLLOWS:  
 SITE #1: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF BLANCO COUNTY  
 SITE #2: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF BURNET COUNTY  
 SITE #3: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF GILLESPIE COUNTY  
 SITE #4: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF LLANO COUNTY  
 SITE #5: ANY DELIVERY ADDRESS OR LAT/LONG WITHIN THE LIMITS OF MASON COUNTY

**Austin District  
Maintenance Office**



**LOCATION  
SUMMARY**

© 2020	CONT	SECT	JOB	HIGHWAY
DS: CK:	6404	64	001	US 281, ETC
DW: CK:	DIST	COUNTY	SHEET NO.	
	AUS	BLANCO, ETC	5	