

CONT	SECT	JOB	HIGHWAY
6404	60	001	SH 21, ETC.
DIST	COUNTY		SHEET NO.
AUS	HAYS, ETC.		1


STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
MATERIALS MAINTENANCE CONTRACT
MATERIALS ONLY

PROJECT NUMBER
MMC 640460001

HAYS, ETC
SH 21, ETC

LIMITS: VARIOUS COUNTIES INCLUDING
BASTROP, CALDWELL, HAYS, LEE, TRAVIS, AND WILLIAMSON
FOR THE DELIVERY OF HOT MIX COLD-LAID ASPHALT CONCRETE PAVEMENT

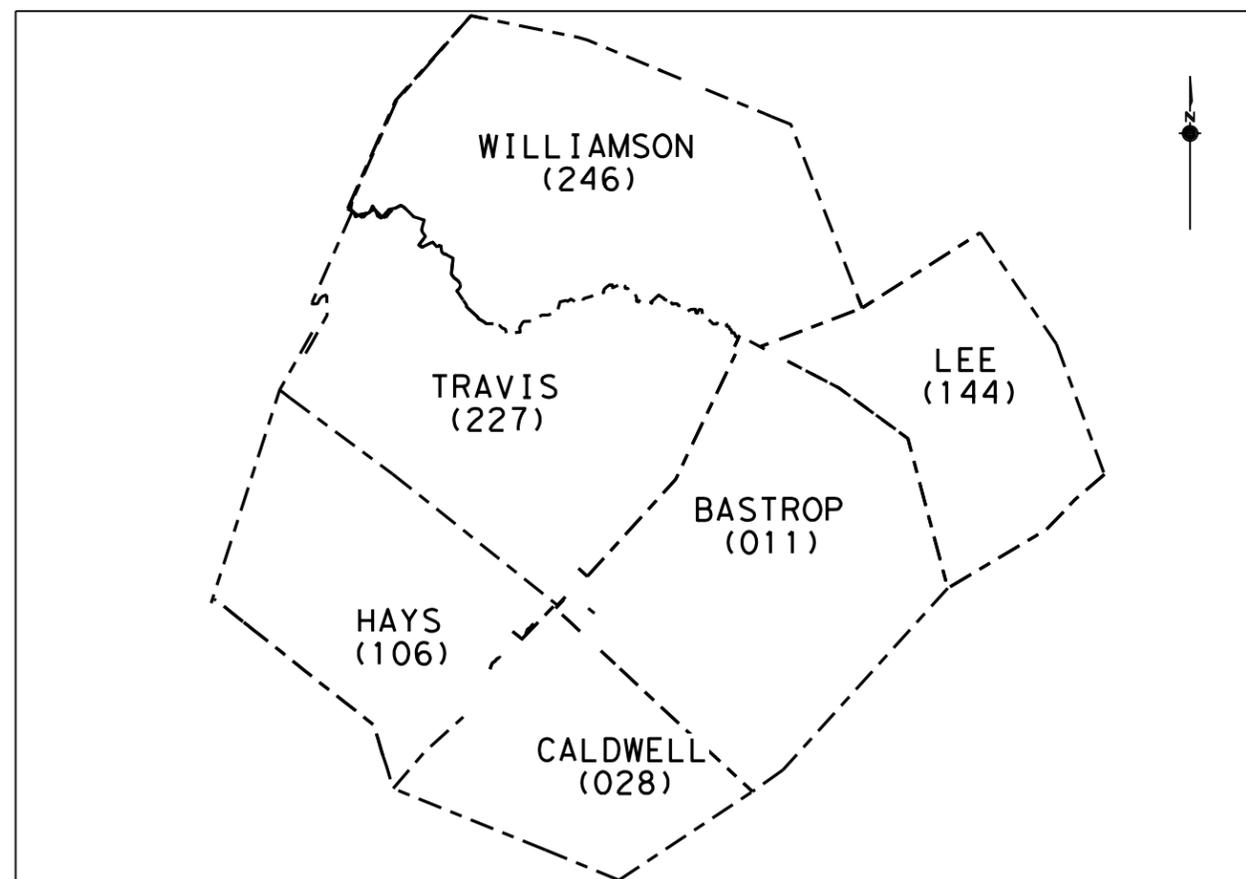

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSINGS: NONE

SUBMITTED FOR LETTING: 6/23/2022

DocuSigned by:
Susana Ceballos P.E.
E1816167B5C7414
DISTRICT MAINTENANCE ENGINEER

SUBMITTED FOR LETTING: 6/23/2022

DocuSigned by:
Jacob Wells
03D704AB5F08458
DISTRICT MAINTENANCE ADMINISTRATOR

APPROVED FOR LETTING: 6/23/2022

DocuSigned by:
Omar X. De Leon, P.E.
D18DBE2B94AE4EA
DIRECTOR OF OPERATIONS

FILE: \$FILE\$ DATE: \$DATE\$ TIMES

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION ON NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT.



GENERAL

- 1 TITLE SHEET
- 2 INDEX OF SHEETS
- 3, 3A GENERAL NOTES
- 4 ESTIMATE AND QUANTITY
- 5 LOCATION SUMMARY

**Austin District
Maintenance Office**



INDEX OF SHEETS

© 2021		CONT	SECT	JOB	HIGHWAY
DS:	CK:	6404	60	001	SH 21, ETC
		DIST	COUNTY		SHEET NO.
DR:	CK:	AUS	HAYS, ETC		2

DATE:
FILE:

Project Number: MMC 640460001

County: Hays, etc.

Highway: SH 21, etc.

Sheet: 3

Control: 6404-60-001

GENERAL NOTES:

GENERAL

Contractor questions on this project are to be addressed to the following individual(s):

Pre Bid Contact List

District Maintenance Susana.Ceballos@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals.

All contractor questions will be reviewed by the Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following Address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name.

Written notice will be given to begin work on this project.

Work must begin within seven (7) calendar days after such notification. Time charges will begin when work begins regardless if it falls within seven (7) calendar days of the notification to begin work.

The contractor will have **“One hundred twenty” (120)** calendar days to complete all work under this contract.

Work under this contract shall consist of **Hot Mix Cold-Laid Asphalt Concrete Pavement Material Delivery** at various locations in **Bastrop, Caldwell, Hays, Lee, Travis, and Williamson Counties.**

Prior to beginning operations, the Department will arrange a preconstruction conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times. Specifications, unusual conditions, and other pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

Each contract is considered separate and individual from others. Requirements to complete work on any or all contracts may occur at the same time. If requests are issued at the same time, it is expected that the work will be completed in the time frame allowed.

Project Number: MMC 640460001

County: Hays, etc.

Highway: SH 21, etc.

Sheet: 3

Control: 6404-60-001

Material orders and delivery are expected to be fulfilled no later than 21 calendar days after request for material is made. Delivery of materials will be coordinated by the responsible Maintenance Supervisor:

Bastrop	Robert Wilson	512-359-6914	Robert.Wilson@txdot.gov
Caldwell	Michael Self	512-398-2412	Michael.Lynn.Self@txdot.gov
Hays	Jesse Serna	512-353-1061	Jesse.Serna@txdot.gov
Lee	Marcus Snowden	512-253-6070	Marcus.Snowden@txdot.gov
Travis East & Central	Greg Stephens	512-997-2267	Gregory.Stephens@txdot.gov
Travis North	Anthony Reitan	512-331-5361	Anthony.Reitan@txdot.gov
Williamson East	Jackie Volek	512-365-5254	Jackie.Volek@txdot.gov
Williamson West	Chris Rizzo	512-930-6018	Chris.Rizzo@txdot.gov

ITEM 3 – AWARD AND EXECUTION OF CONTRACT

A work order will be issued to the contractor for specific items and quantities to be delivered as well as days to complete the work order and expected delivery date. The contractor will contact the responsible maintenance supervisor on the delivery date confirming delivery time.

This Contract includes non-site specific work. Multiple work orders will be used to procure work of the type identified in the Contract at locations that have not yet been determined.

ITEM 6 - CONTROL OF MATERIALS

Use materials from pre-qualified producers. A list of material producers pre-qualified by the Construction Division (CST) of the Texas Department of Transportation (TxDOT) can be found at the following website: <https://www.txdot.gov/business/resources/producer-list.html>

The Contractor is responsible for furnishing all materials included in this contract. Materials provided by Contractor will be new unless otherwise shown on the plans or approved. The Contractor must receive approval from the Engineer prior to ordering materials for this contract.

The Contractor is required to have sufficient supply of material to deliver within the allotted time.

All deliveries shall maintain a minimum of 100 tons per day once delivery has commenced.

Give a minimum of 1 business day notice for materials, which require inspection at the Plant.

Furnish uncontaminated materials of uniform quality that meet the requirements of the plans and specifications. Materials may be rejected if evidence of contamination is present. Additional sampling for acceptance may be required.

Delivery of material will not be accepted without scale certifications and tested/approved material received 48 hours prior to scheduled delivery.

Project Number: MMC 640460001

County: Hays, etc.

Highway: SH 21, etc.

Sheet: 3A

Control: 6404-60-001

Sheet: 3A

Control: 6404-60-001

ITEM 8 – PROSECUTION AND PROGRESS

Time charges will be in accordance with Article 8.3.1.5 “Calendar Day”.

In accordance with Article 8.6 "Failure to Complete Work on Time," liquidated damages shall be charged each day for failure to meet each work order. This will include:

1. Failure to deliver at the starting date or continually progress on the work order.
2. Failure to deliver the required materials per day.
3. Failure to complete work order within 3 weeks (21 calendar days) from the issue date on work order.

The amount assessed per day for liquidated damages shall be 1 % of the estimated cost of the work order, not to be less than \$200 per day and not to exceed \$500 per day.

ITEM 9 – MEASUREMENT AND PAYMENT

In accordance with Article 9.1,” Measurement of Quantities,” furnish the tare and maximum gross weights as well as the volume capacity of all vehicles, trucks, truck-tractors, trailers, semitrailers, or combination of such vehicles used to deliver materials for the contract. Also, furnish calculations supporting these weights and capacities. Provide all measurements required for pay a minimum of 2 days before the equipment is used.

In accordance with Article 9.2 “Plans Quantity Measurement,” plans quantity measurement requirements are not applicable for this contract. Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for delivery.

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

ITEM 520 – WEIGHING AND MEASURING EQUIPMENT

A daily summary spreadsheet will be required for all material delivered.

SS 8013 – HOT-MIX COLD LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY)

Use SAC B or better AC-0.6 for this Item.

Transport truck will deliver material with an end dump trailer/belly dump as specified in the work orders.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6404-60-001

DISTRICT Austin
HIGHWAY SH0021

COUNTY Hays

CONTROL SECTION JOB				6404-60-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00187980			
COUNTY				Hays			
HIGHWAY				SH0021			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8013-6003	HMCL ACP TYPE B (DELIVERY)(SITE 1)	TON	1,000.000		1,000.000	
	8013-6004	HMCL ACP TYPE B (DELIVERY)(SITE 2)	TON	5,000.000		5,000.000	
	8013-6005	HMCL ACP TYPE B (DELIVERY)(SITE 3)	TON	500.000		500.000	
	8013-6006	HMCL ACP TYPE B (DELIVERY)(SITE 4)	TON	500.000		500.000	
	8013-6007	HMCL ACP TYPE B (DELIVERY)(SITE 5)	TON	1,000.000		1,000.000	
	8013-6008	HMCL ACP TYPE B (DELIVERY)(SITE 6)	TON	4,000.000		4,000.000	
	8013-6009	HMCL ACP TYPE D (DELIVERY)(SITE 1)	TON	500.000		500.000	
	8013-6010	HMCL ACP TYPE D (DELIVERY)(SITE 2)	TON	2,000.000		2,000.000	
	8013-6011	HMCL ACP TYPE D (DELIVERY)(SITE 3)	TON	2,000.000		2,000.000	
	8013-6012	HMCL ACP TYPE D (DELIVERY)(SITE 4)	TON	500.000		500.000	
	8013-6013	HMCL ACP TYPE D (DELIVERY)(SITE 5)	TON	1,600.000		1,600.000	
	8013-6014	HMCL ACP TYPE D (DELIVERY)(SITE 6)	TON	3,000.000		3,000.000	

