




# STATE OF TEXAS TEXAS DEPARTMENT OF TRANSPORTATION

## INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1.	TITLE SHEET
2.	GENERAL NOTES
3.	ESTIMATE AND QUANTITY SHEET

## WORK CONSISTING OF HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT DELIVERY (MATERIALS ONLY)

PROJECT NO: MMC 6433-16-001  
COUNTY: CALHOUN

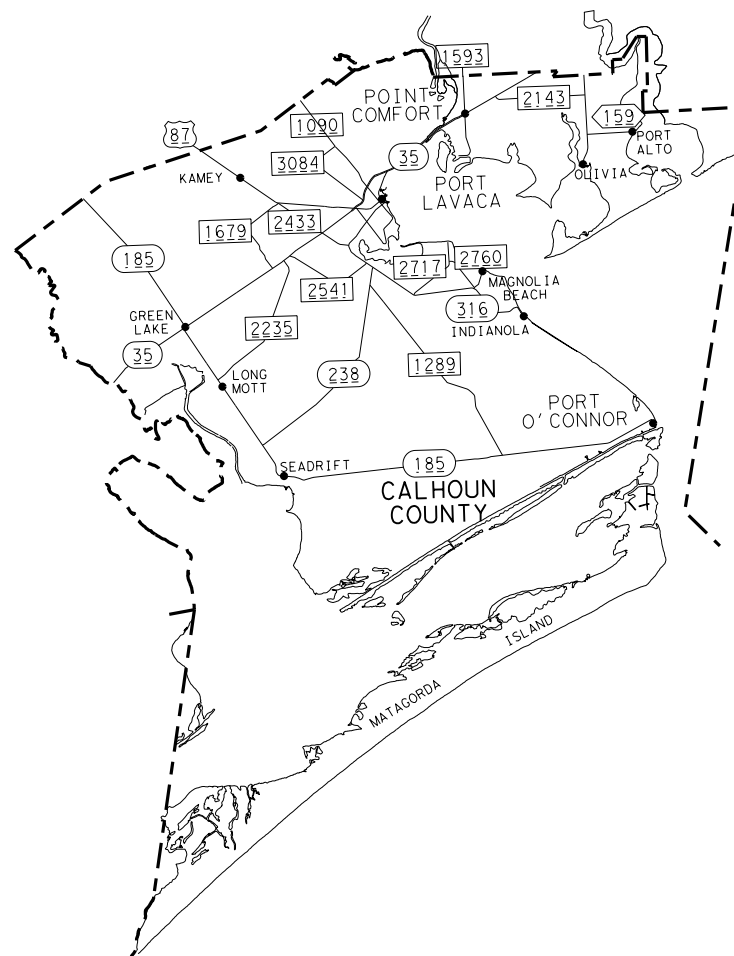


THE STANDARD SHEETS SPECIFICALLY IDENTIFIED ABOVE HAVE BEEN SELECTED BY ME OR UNDER MY RESPONSIBLE SUPERVISION AS BEING APPLICABLE TO THIS PROJECT.

*Mark C. Netardus* P.E.      2-27-23  
MAINTENANCE ENGINEER      DATE

CALHOUN COUNTY  
YOAKUM DISTRICT

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT

EXCEPTIONS: NONE  
EQUATIONS: NONE  
RAILROAD CROSSING: NONE



APPROVED FOR LETTING: February 27, 2023

*Michael Brzozowski* PE  
DIRECTOR OF OPERATIONS

## TITLE SHEET

Texas Department of Transportation  
© 2023 BY TEXAS DEPARTMENT OF TRANSPORTATION  
ALL RIGHTS RESERVED

FED. RD. DIV. NO.		PROJECT NO.	
6		6433-16-001	
CONT.	SECT.	JOB	HIGHWAY NO.
			SH 35
STATE	DIST.	COUNTY	SHEET NO.
TEXAS	YKM	CALHOUN	1

PATH: T:\YK\TRAFFIC\MAINT\Design Projects\FY 23\MATERIALS CONTRACTS\HOT MIX\VICTORIA\FILE: 6429-96-001\HM TITLE SHEET.dgn  
DATE: \$DATE\$

**Project Number: MMC 6433-16-001**

**County: CALHOUN COUNTY**

**Highway: SH 35, etc.**

**GENERAL NOTES:**

This is a contract for supplying material on an as needed basis.

Bid price should include furnishing material and delivery anywhere within the county.

Contractor questions on this project are to be addressed to the following individual(s):

Mark Netardus                      Mark.Netardus@txdot.gov  
Michael Brzozowski              Michael.Brzozowski@txdot.gov

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

The Maintenance Supervisor for Calhoun County is Jon Adame @ 361-935-3656.  
Email address is: [Jon.Adame@txdot.gov](mailto:Jon.Adame@txdot.gov)

Furnish a certified copy of the legal gross weight of each vehicle hauling materials by weight and certified measurements for all trucks hauling material by volume.

**ITEM 8013: HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT  
(MATERIALS ONLY)**

The Maintenance Supervisor will make arrangements with the Contractor to have the material delivered to the Maintenance yard or the roadway.

The contractor is responsible for furnishing and delivering the hot-mix cold-laid asphalt concrete pavement to the Calhoun Maintenance Yard. The delivery hours will be Monday through Thursday 7:00 AM to 5:00 PM. The Maintenance Section will stockpile the material.

**Project Number: MMC 6433-16-001**

**County: CALHOUN COUNTY**

**Highway: SH 35, etc.**

Deliver Hot Mix Cold Laid to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.

There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.



# Estimate & Quantity Sheet

**CONTROLLING PROJECT ID** 6433-16-001

**DISTRICT** Yoakum

**COUNTY** Calhoun

**HIGHWAY** SH0035

<b>CONTROL SECTION JOB</b>				<b>6433-16-001</b>		TOTAL EST.	TOTAL FINAL
<b>PROJECT ID</b>				<b>A00193526</b>			
<b>COUNTY</b>				<b>Calhoun</b>			
<b>HIGHWAY</b>				<b>SH0035</b>			
<b>ALT</b>	<b>BID CODE</b>	<b>DESCRIPTION</b>	<b>UNIT</b>	EST.	FINAL		
	8013-6002	HMCL ACP TYPE D SAC-B AC-0.6 (DELIVERY)	TON	3,000.000		3,000.000	