

STATE OF TEXAS
TEXAS DEPARTMENT OF TRANSPORTATION


MATERIALS MAINTENANCE CONTRACT

PROJECT NO: MMC 6462-39-001

CSJ: 6462-39-001

LIMITS:*

FOR PURCHASE, DELIVERY & PICK-UP OF MATERIALS ONLY:
DENSE-GRADE HOT-MIX ASPHALT

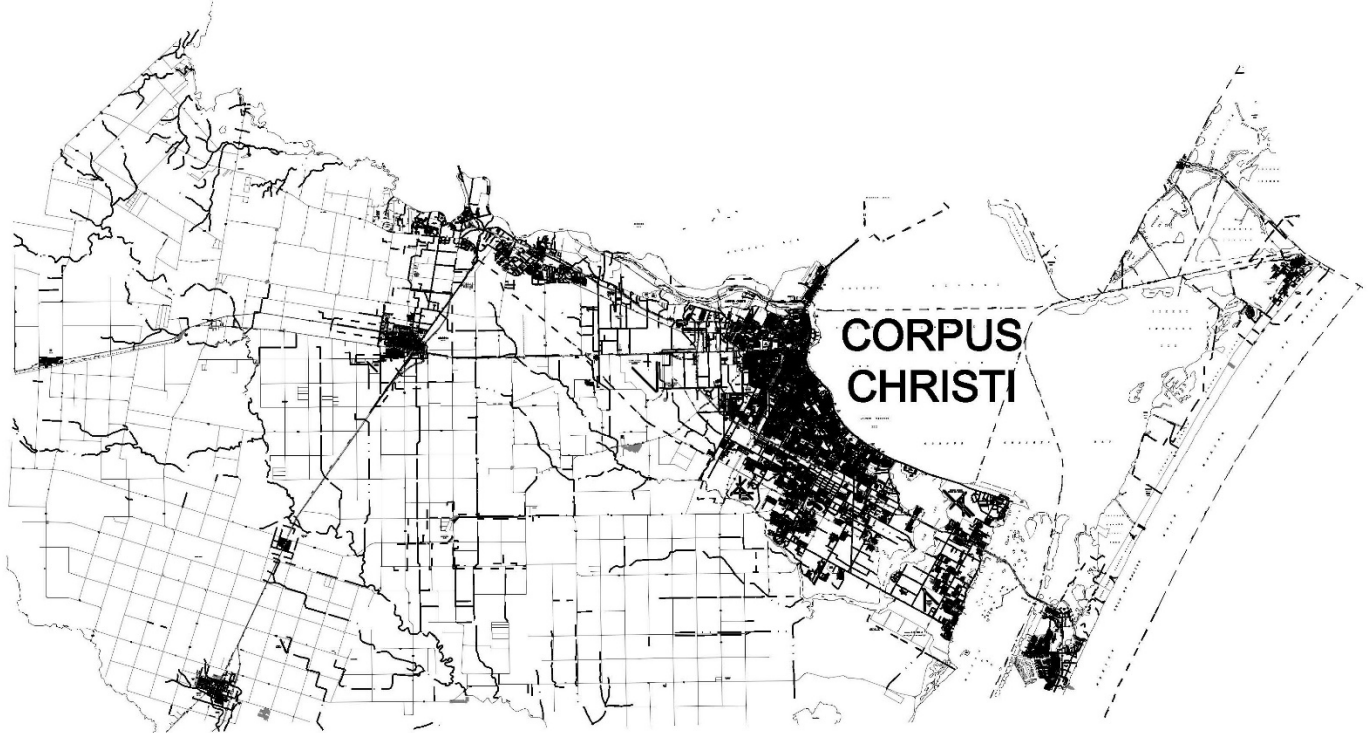

• CORPUS CHRISTI MAINTENANCE OFFICE AREA OF RESPONSIBILITY

INDEX OF SHEETS

- 1 TITLE SHEET
- 2 - 4 GENERAL NOTES
- 5 ESTIMATE & QUANTITY SHEET
- 6 SUMMARY & LOCATION SHEET

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014 AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT



© 2023

TEXAS DEPARTMENT OF TRANSPORTATION

SUBMITTED 12/12/2023

APPROVED 12/12/2023

FOR LETTING: _____

FOR LETTING: _____

DocuSigned by:

Armando Bosquez

B8B23CC13362472...

BRIDGE ENGINEER

DocuSigned by:

James Harris

E2942450264E4E8...

DIRECTOR OF MAINTENANCE

Project Number: MMC 6462-39-001

County: Nueces

Control: 6462-39-001

General Notes:

This contract shall commence upon the issuance of a work order by the Director of Maintenance or his representative and shall continue for 180 calendar days. This project consists of described word defined with item “8011 delivery of Dense-Graded Hot-Mix, Asphalt materials from the hot-mix asphalt plant to the Maintenance Section’s designated locations specified”, the 2014 Texas Standard Specifications, General Notes and Plans. See estimate and quantity sheet for type and quantity of materials.

This purpose of this contract is to supply Hot Mix D-GR HMA (SQ) TY D PG 64-22 (PICK-UP) (DELIVERY) at the following locations:

Site 1	Corpus Christi Maintenance
--------	----------------------------

Coordinate work through the following individuals:

Area Engineer	Address	Contact Information
Ernesto Longoria Area Engineer	1701 S. Padre Island Dr. Corpus Christi, TX 78416	Ernesto Longoria Ernesto.Longoria@txdot.gov
Fidencio Lopez, Jr. Assistant Area Engineer	1701 S. Padre Island Dr. Corpus Christi, TX 78416	Fidencio Lopez, Jr. Fidencio.Lopez@txdot.gov
Maintenance Section	Address	Contact Information
David Franco Maintenance Supervisor	844 N. Padre Island Dr. Corpus Christi, TX 78469	David Franco David.Franco@txdot.gov

SECTION 10.2 – Instructions to Bidders:

This project includes plan sheets that are not part of the bid proposal. View or download plans at:

<http://www.txdot.gov/business/letting-bids/plans-online.html>

All Contractor questions will be reviewed by the Area Engineer or Assistant Area Engineer. Once a response is developed, it will be posted to TxDOT's Public FTP at the following address:

<https://ftp.dot.state.tx.us/pub/txdot-info/Pre-Letting Responses/>

All questions submitted that generate a response will be posted through this site. The site is organized by District, Project Type (Construction or Maintenance), Letting Date, CCSJ/Project Name. Contractor questions will only be accepted through email to the above individuals.

Project Number: MMC 6462-39-001

County: Nueces

Control: 6462-39-001

SECTION 10.3 – AWARD AND EXECUTION OF CONTRACT:

If several contracts are awarded to the same contractor, the contractor shall be sufficiently equipped to concurrently supply each contract material. Each contract awarded by the Department stands on its own and as such, is separate from other contracts.

Material requests shall be issued by Work Order to the Contractor a minimum of 7 calendar days in advance unless expedited items therefore allowing a minimum of 48 hours. Each Work Order shall specify quantities to be delivered, location of delivery, and days to complete Work Order. A minimum of 20 Tons per work order will be required for delivery only.

SECTION 10.4 – SCOPE OF WORK:

Prior to beginning operations, schedule and participate in a coordination call or virtual meetings with the Engineer or designated representative to establish points of contact for communication, an issue escalation ladder, delivery location details, and other Contract requirements. Work with Engineer to resolve or escalate all issues.

In accordance with Article 10.4.3, TXDOT does not guarantee a specific volume to be purchase. No minimum compensation to the Contractor is guaranteed. Quantities indicated for each Item in the Contract are estimates only and are based on the previous usage. These estimates should not be construed as a minimum or maximum quantity to be ordered. The acceptance of this contract also does not guarantee that any materials may be ordered.

If a delivery location changes by more than five miles, either party can request an adjustment to the Contract for changes in freight trucking cost.

SECTION 10.8 – PROSECUTION AND PROGRESS:

Contract time charges shall begin upon issuance of "Authorization to Begin Work" letter. This contract is for one-hundred and eighty (180) calendar days and shall be computed and charged in accordance with Article 10.8.2, "Contract Term".

All material delivery tickets must include the Work Order number and be signed, dated, and list the arrival/departure times by the Department representative upon arrival at final delivery location.

In the event of a delay in delivery of materials notify the Maintenance Supervisor for the work order immediately by phone and provide documentation, in writing, to the office of record upon completion of delivery.

Failure to complete a work order will incur damages in accordance with Article 10.8.6. Actual damages incurred will be deducted from the work order payment and calculations will be provided upon request.

Project Number: MMC 6462-39-001

County: Nueces

Control: 6462-39-001

SECTION 10.9 – MEASUREMENT AND PAYMENT:

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

Trucks may be held up for 2-hours at the jobsite at no additional expense to the Department. Written documentation of arrival will be used when calculation demurrage charges and included on an invoice submitted to the managing office. The Department will specify the arrival time and delivery frequency on the work order provided to the Contractor. If the Contractor arrives prior to the specified delivery time, the 2-hour hold will not begin until the arrival time specified on the work order. Contractor will provide demurrage rate per truck, per 15-min increment, and the Coordination call prior to beginning work on the Contract. Demurrage charges will be invoiced in 15-min increments, rounded down to the nearest whole increment. Contractor will be required to provide documentation for the demurrage per truck.

Actual Damage charges – delay caused by the Contractor (when a vendor is unable to meet delivery requirement and TxDOT suffers a verifiable loss as a result.) If advanced notice is not approved and the Department must obtain material through another source, the Department could seek damages for any costs exceeding the Contract bid items.

Project Number: MMC 6462-39-001

County: Nueces

Control: 6462-39-001

ITEM 8011 – Dense-Graded Hot-Mix Asphalt (Small Quantity) (Materials Only)

Mixture designs, without additives, failing to meet the requirements of Table 6 will require the addition of a minimum 1.0% of Type A hydrated lime based on dry weight of the total aggregate.

Use of Recycled Asphalt Shingles (RAS) in the HMA surface course is not permitted.

Do not add additional quantity of RAP to stockpiles tested and approved. If additional RAP is added to a stockpile, a new design and trial batch will be required prior to placement on the roadway.

The extracted aggregate from contractor-owned RAP shall have a minimum of 85% two crushed faces when tested in accordance with TEX-460-A, Part I.

Deliver Hot Mix to the roadway in belly dumps unless otherwise directed by the Maintenance Supervisor.

There will usually be two rounds of material delivered each day. Schedule the trucking so that all the trucks ordered for each round of trucks arrive at the site around the same time. No truck will be dumped and allowed to leave the construction site until all the trucks ordered for that round have arrived on the site.

