

STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

SEE SHEET 2 FOR INDEX OF SHEETS

PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT

BPM 6469-86-001

VARIOUS BRIDGES DISTRICTWIDE GRAHAM AREA OFFICE COUNTIES

LIMITS: VARIOUS LOCATIONS





TOTAL LENGTH OF PROJECT =	BRIDGE = 2207.50 FT. = 0.418 MI.
	ROADWAY = 0.00 FT. = 0.000 MI.
	TOTAL = 2207.50 FT. = 0.418 MI.

TYPE OF WORK: FOR ROUTINE MAINTENANCE OF BRIDGE PREVENTATIVE MAINTENANCE
CONSISTING OF CONCRETE SPALL REPAIR, BRIDGE DECK REPAIR, CONCRETE CRACK
INJECTION, SCOUR PROTECTION, CULVERT CLEANING, CHANNEL RESHAPING

FEDERAL AID PROJECT NO.			
BPM 6469-86-001			
CONT	SECT	JOB	HIGHWAY
6469	86	001	SH 25, ETC
DIST	COUNTY		SHEET NO.
WFS	ARCHER, ETC		1

REF. NO.	NBI	ROADWAY	FEATURE CROSSED
*	1	03-005-0137-04-017	SH 25 SOUTH SIDE IRRIG. CANAL
*	2	03-005-0249-02-006	US 281 LAKE CREEK
*	3	03-005-0655-02-005	SH 16 W FRK TRINITY RIVER
*	4	03-005-0655-02-007	SH 16 BRUSHY CREEK
*	5	03-005-0814-02-007	FM 422 KICKAPOO CREEK
*	6	03-005-0824-02-006	FM 172 LITTLE POST OAK CREEK
*	7	03-005-2113-01-003	FM 2581 ONION CREEK
*	8	03-252-0134-02-069	US 380 FLINT CREEK
*	9	03-252-0256-01-017	SH 67 BRAZOS RIVER
*	10	03-252-0362-01-018	SH 16 FLAT ROCK CREEK
*	11	03-252-1711-01-002	FM 1769 FORK OF OAK CREEK
*	12	03-252-3018-01-001	FM 3003 DRAW
*	13	03-252-3149-02-002	FM 3109 FISH CREEK
*	14	03-252-3149-02-004	FM 3109 GAGES CREEK

* PROJECT LIMIT SIGNS AS SHOWN ON BC(2)-21 WILL BE REQUIRED UNLESS WAIVED BY THE ENGINEER

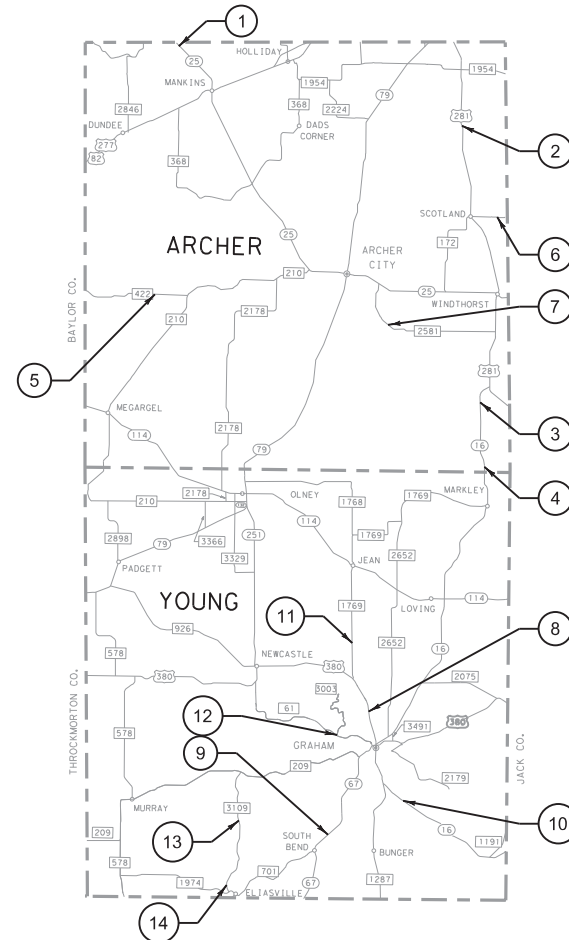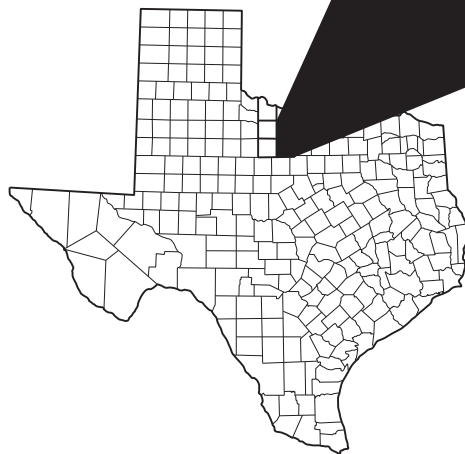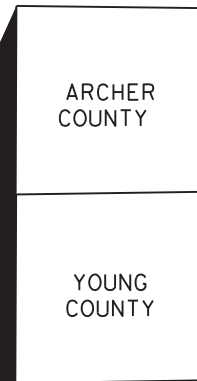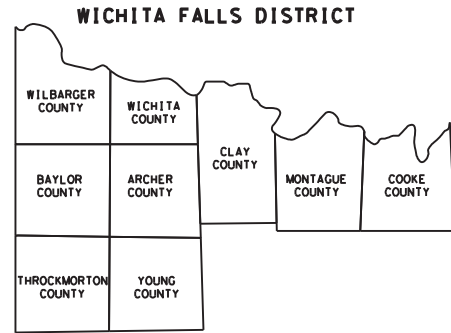

0 7 14
SCALE IN MILES

CONTRACTOR NAME: _____
 CONTRACTOR ADDRESS: _____
 LETTING DATE: _____
 DATE TIME CHARGES BEGAN: _____
 DATE WORK BEGAN: _____
 DATE WORK COMPLETED: _____
 DATE OF ACCEPTANCE: _____
 FINAL CONTRACT COST: _____



RECOMMENDED FOR LETTING: 06/21/2024

 AREA ENGINEER

SUBMITTED FOR LETTING: 06/25/2024
 _____, P.E.
 DISTRICT DIRECTOR OF OPERATIONS

APPROVED FOR LETTING: 06/25/2024
 _____, P.E.
 DISTRICT ENGINEER

EXCEPTIONS: N/A
 EQUATIONS: N/A
 RAILROAD CROSSINGS: N/A

General Requirements

Contractor questions on this project are to be addressed to the following individual(s):

Zach Husen, P.E.: Zachary.Husen@txdot.gov
Christian Sierra, P.E. Christian.Sierra@txdot.gov

Contractor questions will be accepted through email, phone, and in person by the above individuals. Questions may also be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

Bid Item Specific General Notes

Item 4 - Scope of Work

For the preconstruction conference submit a work schedule; temporary water pollution control plan; material sources; the person responsible for the SW3P; written utility coordination plan; certification statements; request for proposed subcontractors and letters designating the project superintendent, safety officer, and payroll officer at the preconstruction conference.

Item 5 - Control of the Work

Provide the Engineer a minimum 24 hours' notice for work requiring inspection or testing.

Item 6 - Control of the Materials

To comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, the contractor must submit a notarized original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product.

Refer to the Buy America Material Classification Sheet for clarification on material categorization.

The Buy America Material Classification Sheet is located at the below link. <https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html> for clarification on material categorization.

Item 7 - Legal Relations and Responsibilities

- No significant traffic generator events identified for this project.

The Contractor's responsible person as described in item 7.2.6.1 must be able to respond within 45 minutes of being notified.

Item 8 - Prosecution and Progress

Progress schedule format shall be critical path method unless otherwise directed.

Item 429 - Concrete Structure Repair

All repair locations shall be marked by contractor for approval by Engineer prior to beginning repairs.

Areas to be repaired at each location shall be repaired in accordance with the Department's Concrete Repair Manual. The Contractor must prepare and submit formal procedures outlining repair plans a minimum of 2 weeks prior to performing repairs. The Engineer must approve in writing any procedures that differ from those in the Concrete Repair Manual or materials that are not included on the Department's MPL.

Moist curing will be required unless curing membrane is approved by the Engineer. If curing membrane is approved for use, the Contractor must use a curing membrane that is recommended for use by the repair material manufacturer.

The Contractor shall maintain a hardcopy of the Department's Concrete Repair Manual on-site when concrete repair work is taking place.

Damage to sound concrete or to reinforcement outside the repair area will be repaired at no cost to the department.

Item 502 - Barricades, Signs, and Traffic Handling

The Traffic Control Plan (TCP) for this project includes the plans, the Texas Manual on Traffic Control Devices, Barricade and Construction Standard Sheets, Standard TCP Sheets, and as otherwise required by the Engineer.

Work will not be permitted without adequate traffic control devices in place. Work will only be permitted on one side of the roadway at any time, or as permitted by the Engineer.

County: Archer, Etc.

Control: 6469-86-001

Highway: SH 25, Etc.

Perform all construction work in daylight hours unless the Engineer approves nighttime work in writing. Do not allow any construction equipment to be placed on the roadway until 30 minutes after sunrise and ensure that all construction equipment is removed from the roadway 30 minutes before sunset. Sunrise and sunset times will be as determined by NOAA at the following website <https://gml.noaa.gov/grad/solcalc/sunrise.html>

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Work vehicles within 30 feet of the traveled way shall have strobe lights or rotating beacons in use.

Wear appropriate personal protective equipment at all times while outside of vehicles and equipment on the project.

The Contractor shall not set up traffic control at multiple locations unless a written request is submitted and approved by the respective engineer, 48 hours prior to work occurring. All work and traffic control operations shall be completed prior to advancing to next location unless otherwise directed by the Engineer.

Provide adequate flagging on side roads to ensure that traffic flow is not compromised during one way traffic control operations.

Repair barricades within 48 hours after barricade report has been delivered to the Contractor. Failure to comply will cease all work until barricades are repaired to the satisfaction of the Department. Replace all damaged traffic control devices immediately. Remove any damaged traffic control devices from the project within 24 hours.

Failure to make necessary corrections to Traffic Control items based on barricade inspections will be cause for withholding the monthly estimate until such corrections are made.

Remove from the roadway and store in a central location approved by the Engineer all temporary traffic control devices, such as cones, barrels, portable signs, vertical panels, etc., which will not be used within 24 hours. This includes removal of temporary traffic control devices from the roadway over the weekend.

The use of Portable Traffic Signals is not required but may be used as an option to the contractor. This will be considered subsidiary to Item 502.

County: Archer, Etc.

Control: 6469-86-001

Highway: SH 25, Etc.

Item 506 - Temporary Erosion, Sedimentation, and Environmental Controls

It is anticipated that there will be minimal erosion control devices required for this project. However, in the event that additional erosion control measures are needed, the storm water pollution and prevention plan (SW3P) for this project shall consist of using the following items:

Erosion control logs, Sediment Control Fence, Permanent seeding, and Vegetative watering

Verify locations and dimensions of BMP's and obtain the Engineer's approval prior to placement. BMP locations indicated on the plans are approximate and may be adjusted as necessary by the Engineer.

If it is determined that other erosion control devices are needed, payment for the work will be determined in accordance with Article 4.4, "Changes in the Work".

The Contractor shall take all practicable precautions to prevent debris from being discharged into the Waters of Texas or a designated wetland. If sediment escapes the construction site, immediately stop all work on the project, remove the sediment, and modify the SW3P site plan to prevent future non-compliance issues.

The Contractor shall construct concrete truck washouts for all concrete items. This work including materials and labor will not be measured or paid for directly but will be subsidiary to Item 506.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6469-86-001


DISTRICT Wichita Falls

COUNTY Archer

HIGHWAY SH0025

CONTROL SECTION JOB				6469-86-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00210633			
COUNTY				Archer			
HIGHWAY				SH0025			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	158-6003	SPEC EXCAV WORK (HYD EXCAVATOR)	HR	16.000		16.000	
	401-6001	FLOWABLE BACKFILL	CY	50.500		50.500	
	428-6001	PENETRATING CONCRETE SURFACE TREATMENT	SY	68.000		68.000	
	429-6004	CONC STR REPAIR(RAPID DECK REP(PRT DPT)	SF	60.000		60.000	
	429-6007	CONC STR REPAIR (VERTICAL & OVERHEAD)	SF	1,977.000		1,977.000	
	432-6031	RIPRAP (STONE PROTECTION)(12 IN)	CY	78.500		78.500	
	432-6033	RIPRAP (STONE PROTECTION)(18 IN)	CY	236.000		236.000	
	432-6044	RIPRAP (CONC)(FLUME)	CY	20.000		20.000	
	438-6002	CLEANING AND SEALING EXIST JOINTS(CL3)	LF	232.000		232.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	5.000		5.000	
	752-6004	TREE TRIMMING / BRUSH REMOVAL(CHANNELS)	AC	0.200		0.200	
	752-6005	TREE REMOVAL (4" - 12" DIA)	EA	1.000		1.000	
	770-6001	REPAIR RAIL ELEMENT (W - BEAM)	LF	75.000		75.000	
	778-6001	CONCRETE RAIL REPAIR (IN-KIND)	LF	22.000		22.000	
	780-6002	CNC CRACK REPAIR (DISCRETE)(INJECT)	LF	6.000		6.000	
	785-6002	BRIDGE JOINT REPAIR (POLYMER)	LF	192.000		192.000	
	6185-6002	TMA (STATIONARY)	DAY	31.000		31.000	
	7000-6001	REML & DISPL DRIFTWOOD & DEBRIS	CY	30.000		30.000	

SUMMARY OF BRIDGE REPAIR ITEMS																	
GRAHAM AREA OFFICE	158	401	428	429	429	432	432	432	438	752	752	770	778	780	785	6185	7000
	6003	6001	6001	6004	6007	6031	6033	6044	6002	6004	6005	6001	6001	6002	6002	6002	6001
	SPEC EXCAV WORK (HYD EXCAVATOR)	FLOWABLE BACKFILL	PENETRATING CONCRETE SURFACE TREATMENT	CONC STR REPAIR(RAPID DECK REP(FRT DPT)	CONC STR REPAIR (VERTICAL & OVERHEAD)	RIPRAP (STONE PROTECTION)(12 IN)	RIPRAP (STONE PROTECTION)(18 IN)	RIPRAP (CONC)(FLUME)	CLEANING AND SEALING EXIST JOINTS(CL3)	TREE TRIMMING / BRUSH REMOVAL(CHANNELS)	TREE REMOVAL (4"-12" DIA)	REPAIR RAIL ELEMENT (W-BEAM)	CONCRETE RAIL REPAIR (IN-KIND)	CNC CRACK REPAIR (DISCRETE)(INJECT)	BRIDGE JOINT REPAIR (POLYMER)	TMA (STATIONARY)	REML & DISPL DRIFTWOOD & DEBRIS
HR	CY	SY	SF	SF	CY	CY	CY	LF	AC	EA	LF	LF	LF	LF	DAY	CY	
ARCHER																	
REFERENCE #1 NBI: 03-005-0137-04-017					139							22	6			3	
REFERENCE #2 NBI: 03-005-0249-02-006		3			89		6				1						
REFERENCE #3 NBI: 03-005-0655-02-005			68		572				84							3	15
REFERENCE #4 NBI: 03-005-0655-02-007					366											1	15
REFERENCE #5 NBI: 03-005-0814-02-007					364				76			75				2	
REFERENCE #6 NBI: 03-005-0824-02-006		21			245		40									4	
REFERENCE #7 NBI: 03-005-2113-01-003		7			48		20	20								2	
YOUNG																	
REFERENCE #8 NBI: 03-252-0134-02-069		2.5			118		20									1	
REFERENCE #9 NBI: 03-252-0256-01-017				60				150							192	5	
REFERENCE #10 NBI: 03-252-0362-01-018		5														2	
REFERENCE #11 NBI: 03-252-1711-01-002		2				7.5				0.2						2	
REFERENCE #12 NBI: 03-252-3018-01-001		3				55										2	
REFERENCE #13 NBI: 03-252-3149-02-002					36	16			72							2	
REFERENCE #14 NBI: 03-252-3149-02-004	16	7														2	
PROJECT TOTALS	16	50.5	68	60	1977	78.5	236	20	232	0.2	1	75	22	6	192	31	30

		Wichita Falls District	
<h2>SH 25, ETC</h2> <h3>QUANTITY SUMMARY</h3>			
SHEET 1 OF 1			
FILE:	DNR:	CK:	DW:
©TxDOT	JULY 2021	CONT	SECT
REVISIONS	6469	86	001
DIST	COUNTY	SHEET NO.	
WFS	ARCHER, ETC	6	

DATE: 6/20/2024 4:51:25 PM
 FILE: T:\WFDESIGN\Plans\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham\BPMZ - BC(1)-21.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT or any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to any other format or for incorrect results or damages resulting from its use.

BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:

- The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- The Engineer has the final decision on the location of all traffic control devices.
- Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

WORKER SAFETY NOTES:

- Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT http://www.txdot.gov
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12




**BARRICADE AND CONSTRUCTION
GENERAL NOTES
AND REQUIREMENTS**

BC (1) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
4-03	7-13	6469 86		001	SH 25, ETC				
9-07	8-14	DIST	COUNTY		SHEET NO.				
5-10	5-21	WFS	ARCHER, ETC		7				


DATE: 6/20/2024 4:51:26 PM
 FILE: T:\WFSD\DESIGN\PLANS\MAINTENANCE\CONTRACTS\BPM FY 25\4 - Design\Plan Set\G-01\BC(2)-21.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for incorrect results or damages resulting from its use.

TYPICAL LOCATION OF CROSSROAD SIGNS

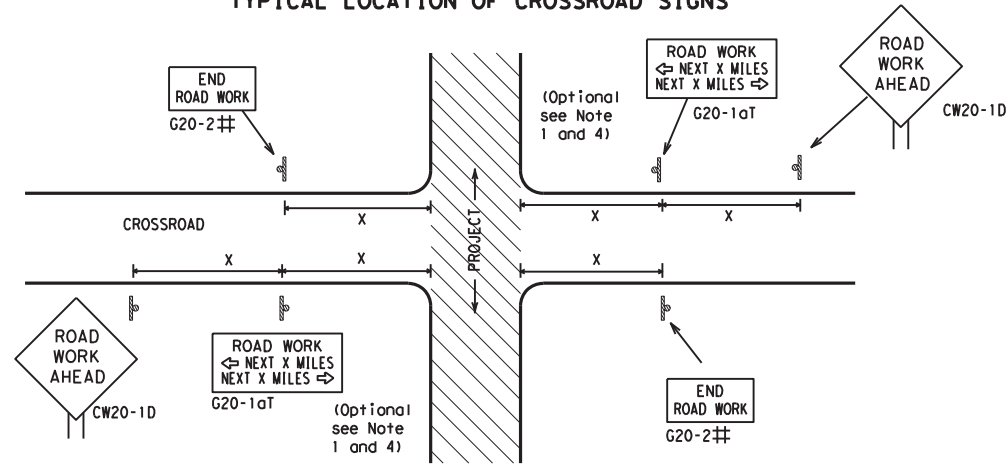

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
 - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
 - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
 - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
 - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
 - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

T-INTERSECTION

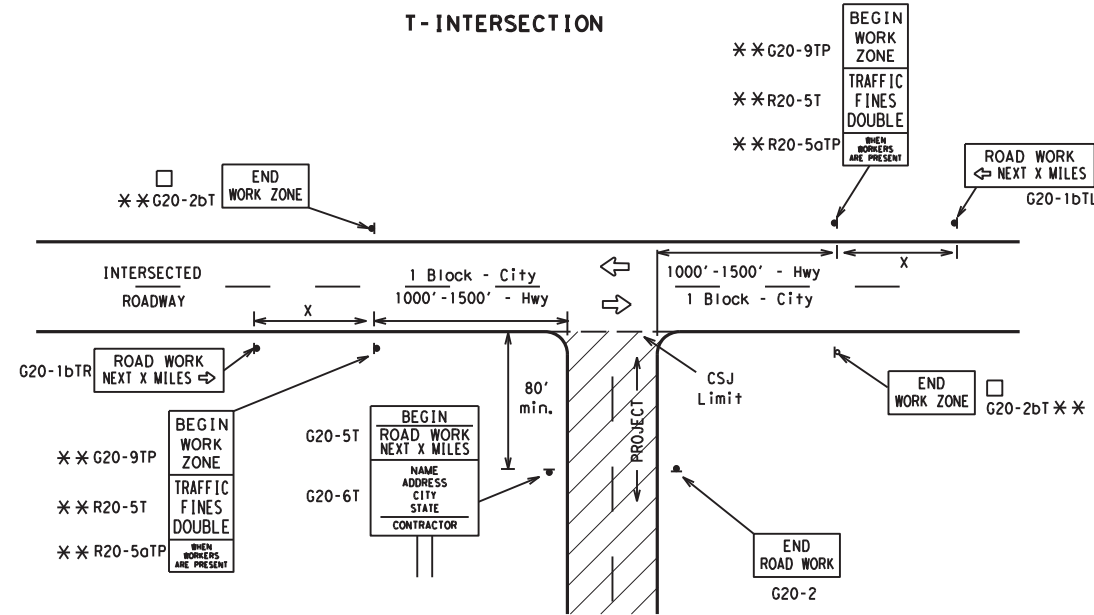

CSJ LIMITS AT T-INTERSECTION

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING^{1,5,6}

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Spacing "x" Feet (Apprx.)
CW20 ⁴	48" x 48"	48" x 48"	30	120
CW21			35	160
CW22			40	240
CW23			45	320
CW25			50	400
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	55	500 ²
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 ²
			65	700 ²
			70	800 ²
			75	900 ²
			80	1000 ²
			*	* ³


* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

△ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

GENERAL NOTES


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS

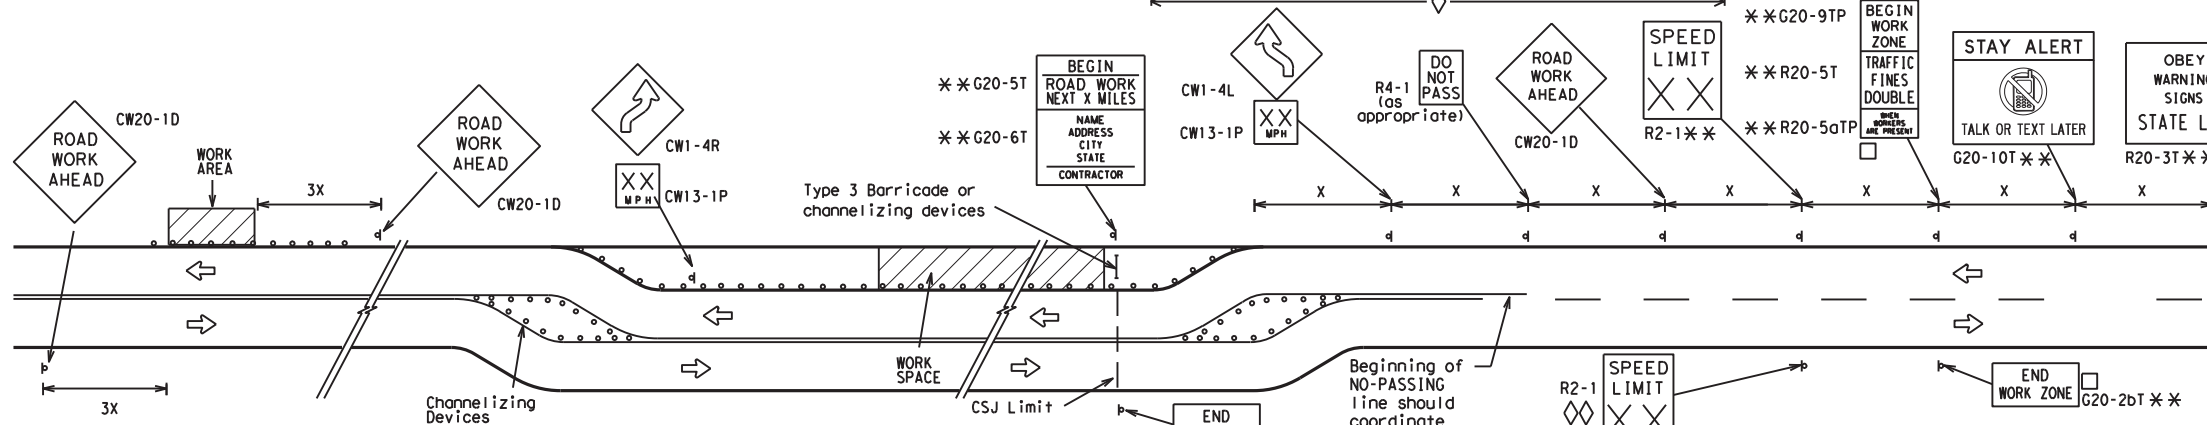


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS

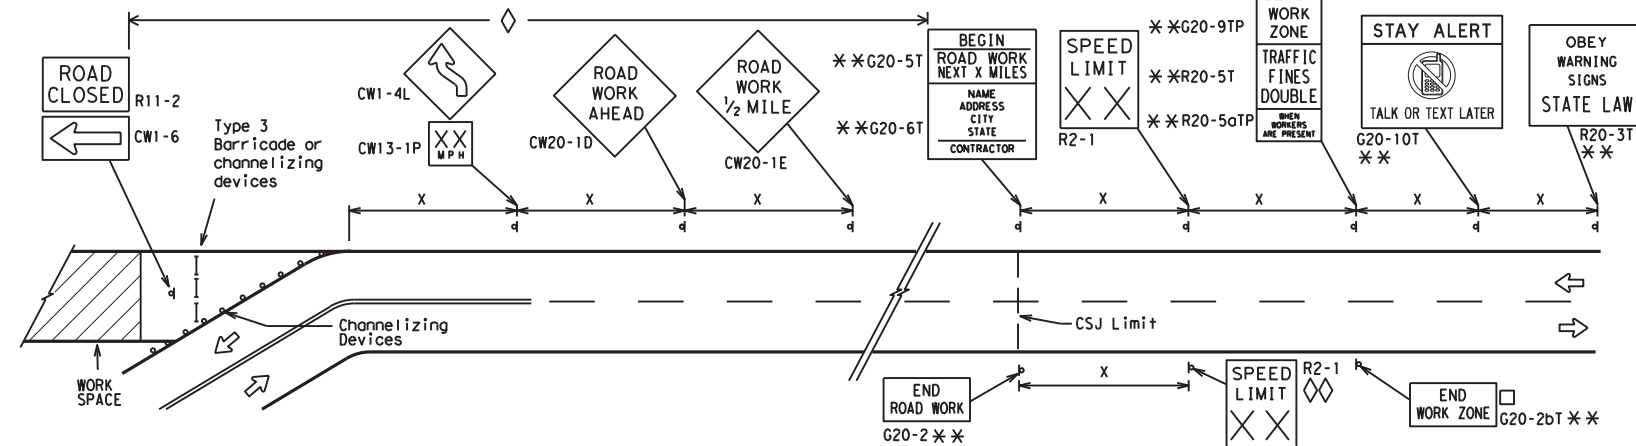

SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS

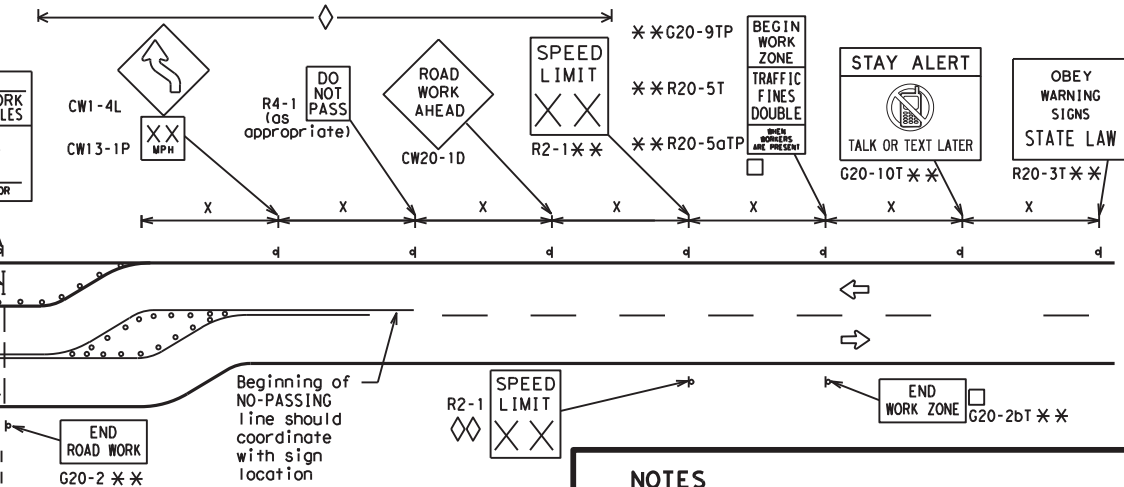

NOTES

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-5T) sign for each specific project. This distance shall replace the "x" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
 - ** CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
 - ◇ Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
 - ◇◇ Contractor will install a regulatory speed limit sign at the end of the work zone.

LEGEND	
—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



BARRICADE AND CONSTRUCTION PROJECT LIMIT


BC(2)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	ARCHER, ETC	8	

TYPICAL APPLICATION OF WORK ZONE SPEED LIMIT SIGNS

Work zone speed limits shall be regulatory, established in accordance with the "Procedures for Establishing Speed Zones," and approved by the Texas Transportation Commission, or by City Ordinance when within Incorporated City Limits.

Reduced speeds should only be posted in the vicinity of work activity and not throughout the entire project. Regulatory work zone speed signs (R2-1) shall be removed or covered during periods when they are not needed.

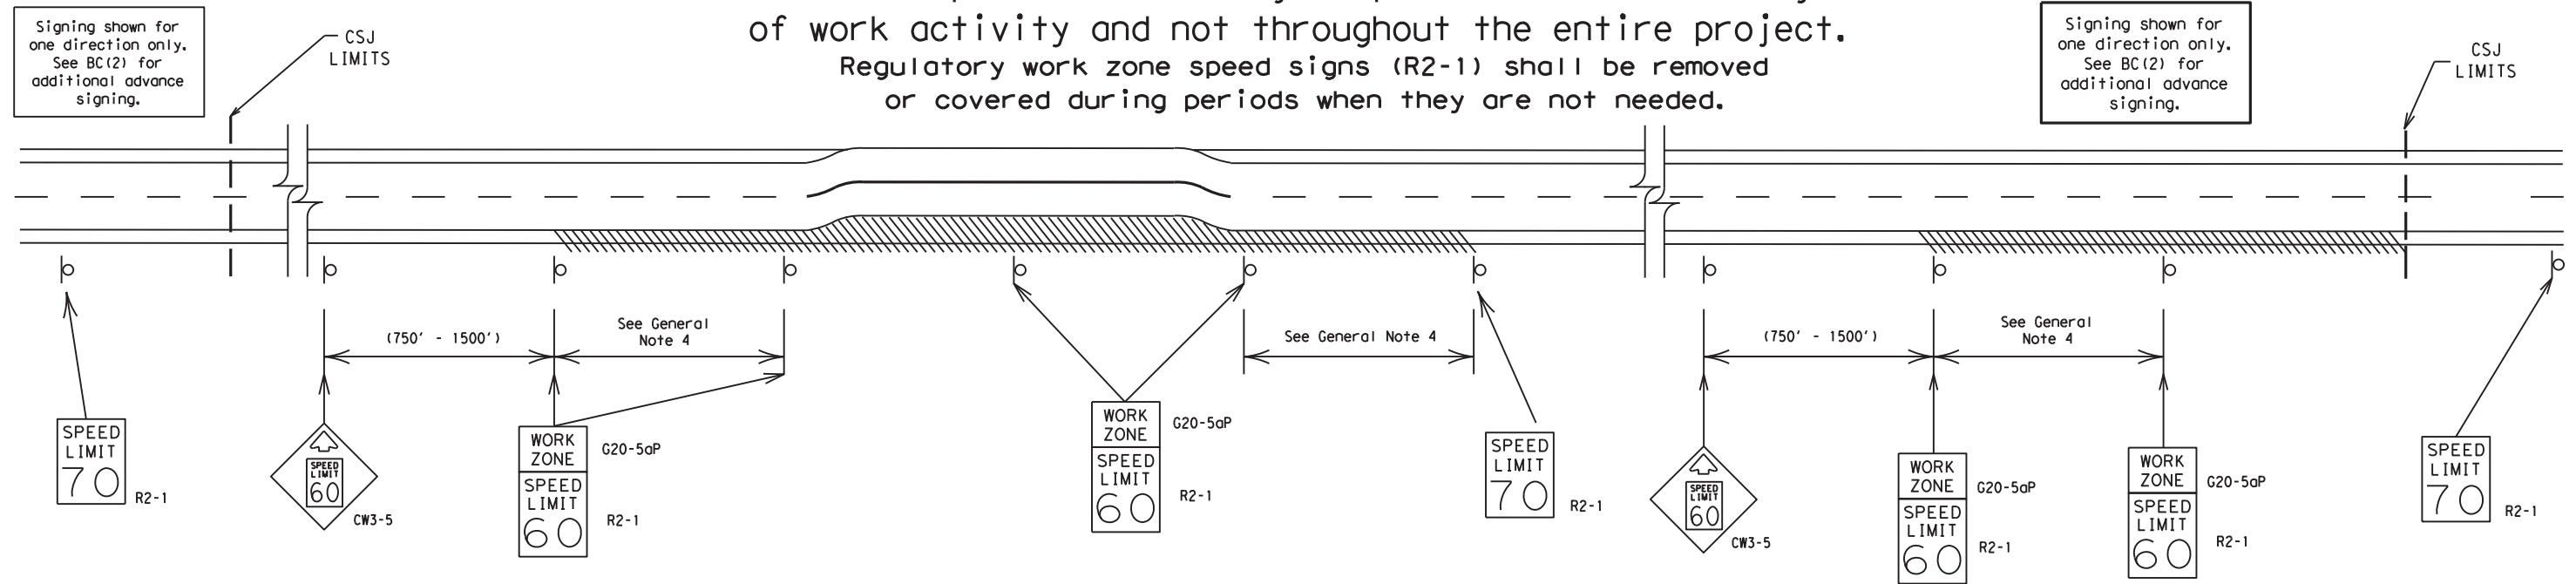

GUIDANCE FOR USE:

LONG/INTERMEDIATE TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit should be included on the design of the traffic control plans when restricted geometrics with a lower design speed are present in the work zone and modification of the geometrics to a higher design speed is not feasible.

Long/Intermediate Term Work Zone Speed Limit signs, when approved as described above, should be posted and visible to the motorist when work activity is present. Work activity may also be defined as a change in the roadway that requires a reduced speed for motorists to safely negotiate the work area, including:

- rough road or damaged pavement surface
- substantial alteration of roadway geometrics (diversions)
- construction detours
- grade
- width
- other conditions readily apparent to the driver

As long as any of these conditions exist, the work zone speed limit signs should remain in place.

SHORT TERM WORK ZONE SPEED LIMITS

This type of work zone speed limit may be included on the design of the traffic control plans when workers or equipment are not behind concrete barrier, when work activity is within 10 feet of the traveled way or actually in the traveled way.

Short Term Work Zone Speed Limit signs should be posted and visible to the motorists only when work activity is present. When work activity is not present, signs shall be removed or covered. (See Removing or Covering on BC(4)).

GENERAL NOTES

- Regulatory work zone speed limits should be used only for sections of construction projects where speed control is of major importance.
- Regulatory work zone speed limit signs shall be placed on supports at a 7 foot minimum mounting height.
- Speed zone signs are illustrated for one direction of travel and are normally posted for each direction of travel.
- Frequency of work zone speed limit signs should be:

40 mph and greater	0.2 to 2 miles
35 mph and less	0.2 to 1 mile
- Regulatory speed limit signs shall have black legend and border on a white reflective background (See "Reflective Sheeting" on BC(4)).
- Fabrication, erection and maintenance of the "ADVANCE SPEED LIMIT" (CW3-5) sign, "WORK ZONE" (G20-5aP) plaque and the "SPEED LIMIT" (R2-1) signs shall not be paid for directly, but shall be considered subsidiary to Item 502.
- Turning signs from view, laying signs over or down will not be allowed, unless as otherwise noted under "REMOVING OR COVERING" on BC(4).
- Techniques that may help reduce traffic speeds include but are not limited to:
 - Law enforcement.
 - Flagger stationed next to sign.
 - Portable changeable message sign (PCMS).
 - Low-power (drone) radar transmitter.
 - Speed monitor trailers or signs.
- Speeds shown on details above are for illustration only. Work Zone Speed Limits should only be posted as approved for each project.
- For more specific guidance concerning the type of work, work zone conditions and factors impacting allowable regulatory construction speed zone reduction see TxDOT form #1204 in the TxDOT e-form system.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for incorrect results or damages resulting from its use.

DATE: 6/20/2024 4:51:28 PM
FILE: T:\WFDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\G20-5aP\BC(3)-21.dgn


SHEET 3 OF 12

		Traffic Safety Division Standard	
<h2>BARRICADE AND CONSTRUCTION WORK ZONE SPEED LIMIT</h2>			
<h3>BC (3) - 21</h3>			
FILE:	bc-21.dgn	DW:	TxDOT
© TxDOT	November 2002	CONT:	6469 86
REVISIONS		SECT:	001
9-07	8-14	JOB:	SH 25, ETC
7-13	5-21	DIST:	ARCHER, ETC
		COUNTY:	
		SHEET NO.:	9

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/20/2024 4:51:29 PM
 FILE: T:\WFDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\2. TCP\BC(1)-21.dgn


TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS

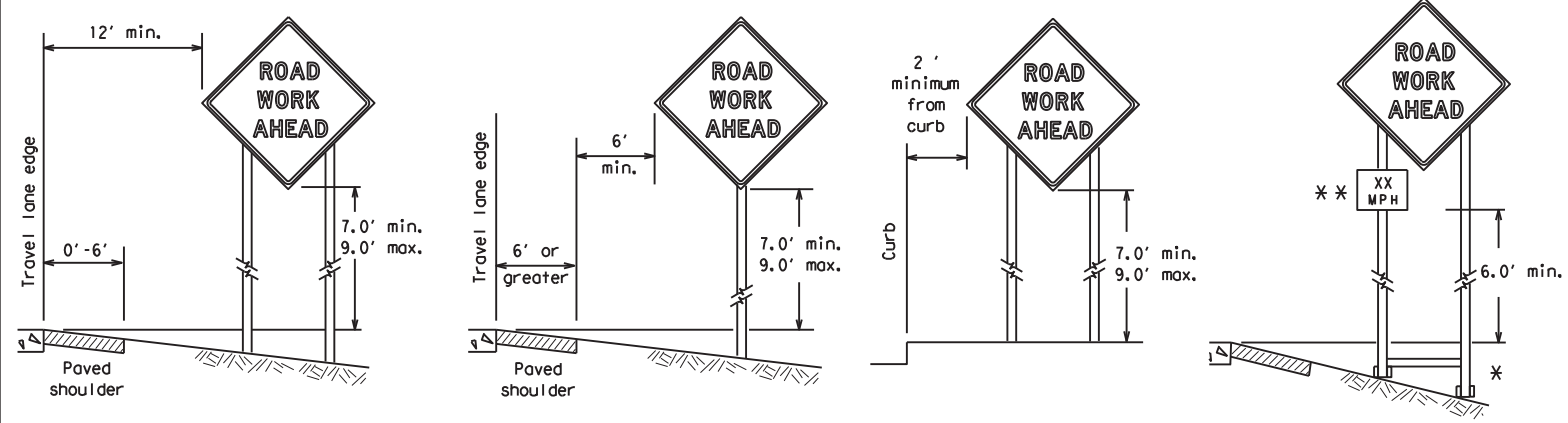

* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

** When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

ATTACHMENT FOR SIGN SUPPORTS

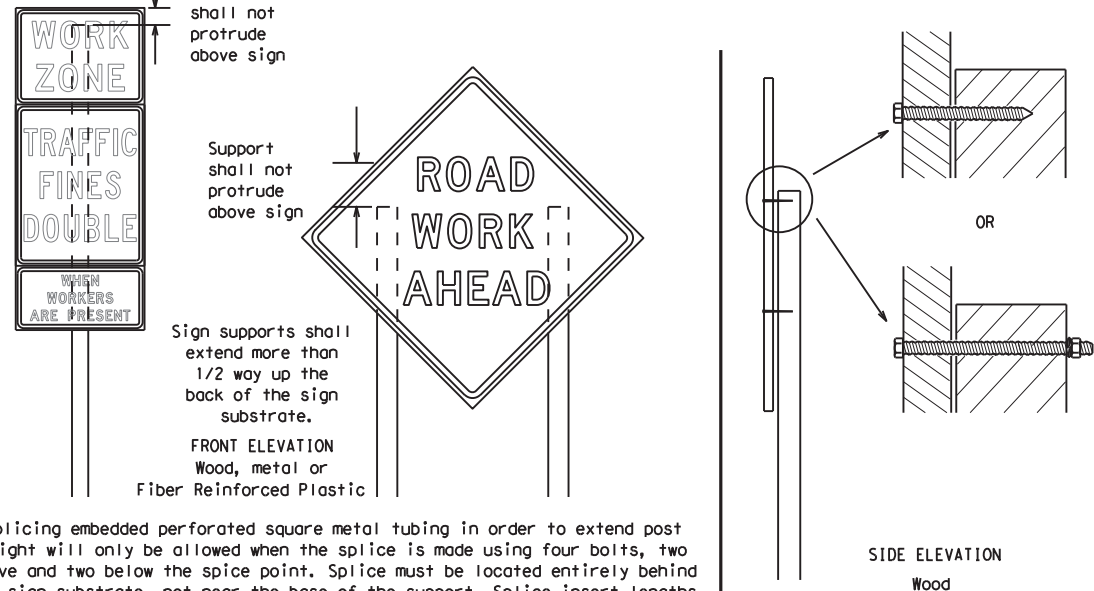


Attachment to wooden supports will be by bolts and nuts or screws. Use TxDOT's or manufacturer's recommended procedures for attaching sign substrates to other types of sign supports

Nails shall NOT be allowed.
 Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

STOP/SLOW PADDLES

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflective when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

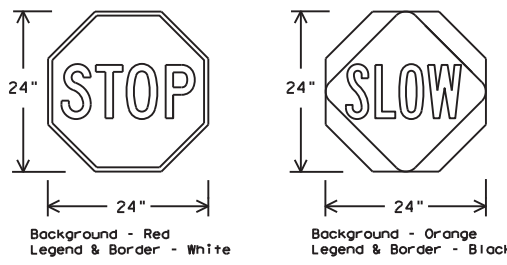

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B _{FL} OR C _{FL} SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTCD list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

GENERAL NOTES FOR WORK ZONE SIGNS

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTCD) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
 - a. Long-term stationary - work that occupies a location more than 3 days.
 - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
 - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
 - d. Short, duration - work that occupies a location up to 1 hour.
 - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

SIGN MOUNTING HEIGHT

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

SIZE OF SIGNS

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

SIGN SUBSTRATES

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTCD lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

REFLECTIVE SHEETING

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B_{FL} or Type C_{FL}, shall be used for rigid signs with orange backgrounds.

SIGN LETTERS

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

REMOVING OR COVERING

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

SIGN SUPPORT WEIGHTS

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTCD list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

FLAGS ON SIGNS

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.



BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES

BC (4) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	SECTION	HIGHWAY			
REVISIONS		6469	86	001	SH 25, ETC				
9-07	8-14	DIST	COUNTY	SHEET NO.					
7-13	5-21	WFS	ARCHER, ETC	10					

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

Phase 1: Condition Lists

Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE	FRONTAGE ROAD CLOSED
ROAD CLOSED AT SH XXX	SHOULDER CLOSED XXX FT
ROAD CLSD AT FM XXXX	RIGHT LN CLOSED XXX FT
RIGHT X LANES CLOSED	RIGHT X LANES OPEN
CENTER LANE CLOSED	DAYTIME LANE CLOSURES
NIGHT LANE CLOSURES	I-XX SOUTH EXIT CLOSED
VARIOUS LANES CLOSED	EXIT XXX CLOSED X MILE
EXIT CLOSED	RIGHT LN TO BE CLOSED
MALL DRIVEWAY CLOSED	X LANES CLOSED TUE - FRI
XXXXXXXX BLVD CLOSED	

Other Condition List

ROADWORK XXX FT	ROAD REPAIRS XXXX FT
FLAGGER XXXX FT	LANE NARROWS XXXX FT
RIGHT LN NARROWS XXXX FT	TWO-WAY TRAFFIC XX MILE
MERGING TRAFFIC XXXX FT	CONST TRAFFIC XXX FT
LOOSE GRAVEL XXXX FT	UNEVEN LANES XXXX FT
DETOUR X MILE	ROUGH ROAD XXXX FT
ROADWORK PAST SH XXXX	ROADWORK NEXT FRI-SUN
BUMP XXXX FT	US XXX EXIT X MILES
TRAFFIC SIGNAL XXXX FT	LANES SHIFT *

* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

Phase 2: Possible Component Lists

Action to Take/Effect on Travel List

MERGE RIGHT	FORM X LINES RIGHT
DETOUR NEXT X EXITS	USE XXXXX RD EXIT
USE EXIT XXX	USE EXIT I-XX NORTH
STAY ON US XXX SOUTH	USE I-XX E TO I-XX N
TRUCKS USE US XXX N	WATCH FOR TRUCKS
WATCH FOR TRUCKS	EXPECT DELAYS
EXPECT DELAYS	PREPARE TO STOP
REDUCE SPEED XXX FT	END SHOULDER USE
USE OTHER ROUTES	WATCH FOR WORKERS
STAY IN LANE *	

Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXX
US XXX TO FM XXXX

Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

** Advance Notice List

TUE-FRI XX AM-X PM
APR XX-XX X PM-X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X-X XX PM - XX AM
NEXT FRI-SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM-XX AM

** See Application Guidelines Note 6.

APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Canot	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High-Occupancy Vehicle	HOV	Tuesday	TUES
Highway	HWY	Time Minutes	TIME MIN
Hour(s)	HR, HRS	Upper Level	UPR LEVEL
Information	INFO	Vehicles (s)	VEH, VEHS
It Is	ITS	Warning	WARN
Junction	JCT	Wednesday	WED
Left	LFT	Weight Limit	WT LIMIT
Left Lane	LFT LN	West	W
Lane Closed	LN CLOSED	Westbound	(route) W
Lower Level	LWR LEVEL	Wet Pavement	WET PVMT
Maintenance	MAINT	Will Not	WONT

Roadway designation # IH-number, US-number, SH-number, FM-number



BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)


BC (6) - 21

FILE:	bc-21.dgn	DW:	TxDOT	CR:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	November 2002	CONT:	6469	SECT:	86	JOB:	001	HIGHWAY:	SH 25, ETC
REVISIONS									
9-07	8-14	DIST:		COUNTY:		SHEET NO.:			
7-13	5-21	WFS:		ARCHER, ETC					12

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 6/20/2024 4:51:34 PM
 FILE: T:\WFSESG\N\IONS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\2. TCP\BC(1)-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

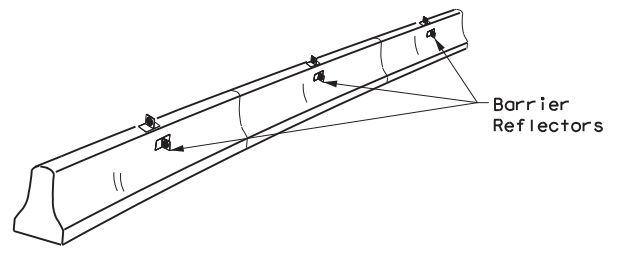


CONCRETE TRAFFIC BARRIER (CTB)

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

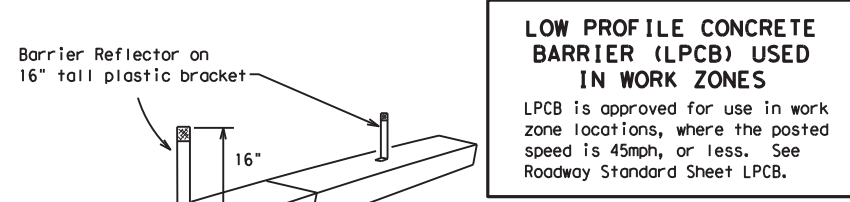

LOW PROFILE CONCRETE BARRIER (LPCB) USED IN WORK ZONES
 LPCB is approved for use in work zone locations, where the posted speed is 45mph, or less. See Roadway Standard Sheet LPCB.

LOW PROFILE CONCRETE BARRIER (LPCB)

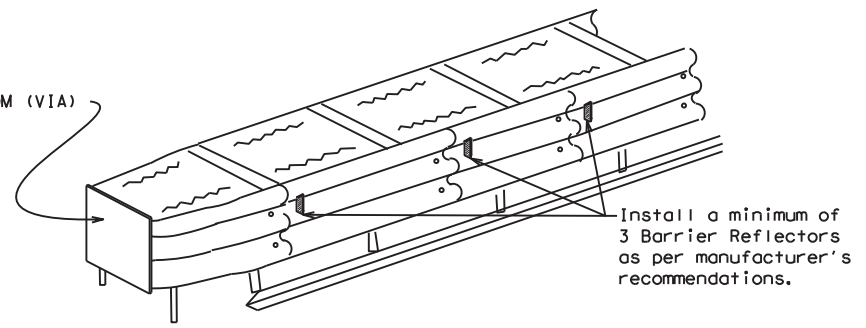

DELINEATION OF END TREATMENTS

END TREATMENTS FOR CTB'S USED IN WORK ZONES
 End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS

WARNING LIGHTS


- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B_{FL} or C_{FL} Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

WARNING LIGHTS MOUNTED ON PLASTIC DRUMS


- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.

WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.




Type C Warning Light or approved substitute mounted on a drum adjacent to the travel way.



Warning reflector may be round or square. Must have a yellow reflective surface area of at least 30 square inches

Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

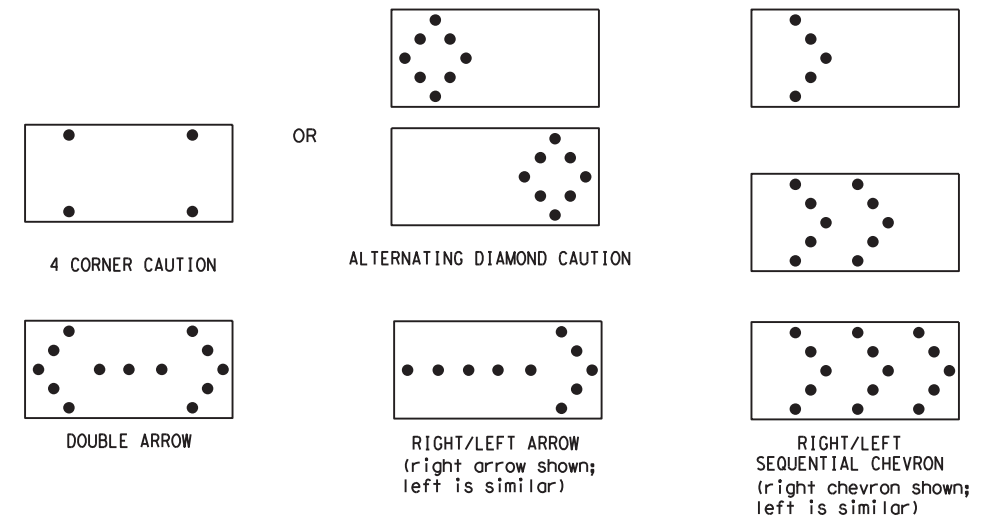

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

ATTENTION
 Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

FLASHING ARROW BOARDS

SHEET 7 OF 12

TRUCK-MOUNTED ATTENUATORS

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR

BC (7) - 21

FILE:	bc-21.dgn	DN:	TxDOT	CR:	TxDOT	OW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6469	86	001	SH 25, ETC				
9-07	8-14	DIST	COUNTY		SHEET NO.				
7-13	5-21	WFS	ARCHER, ETC		13				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/20/2024 4:51:36 PM
 FILE: T:\WFSD\ENGIN\IONS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\2. TCP\BC(1)-21.dgn

GENERAL NOTES

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

GENERAL DESIGN REQUIREMENTS




- Pre-qualified plastic drums shall meet the following requirements:
- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
 - The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
 - Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
 - Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
 - The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
 - The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
 - Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
 - Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
 - Drum body shall have a maximum unballasted weight of 11 lbs.
 - Drum and base shall be marked with manufacturer's name and model number.

RETROREFLECTIVE SHEETING

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.

BALLAST

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

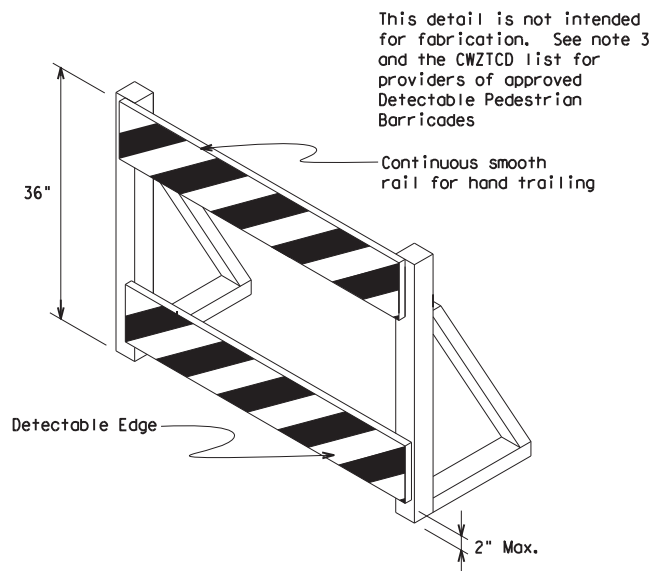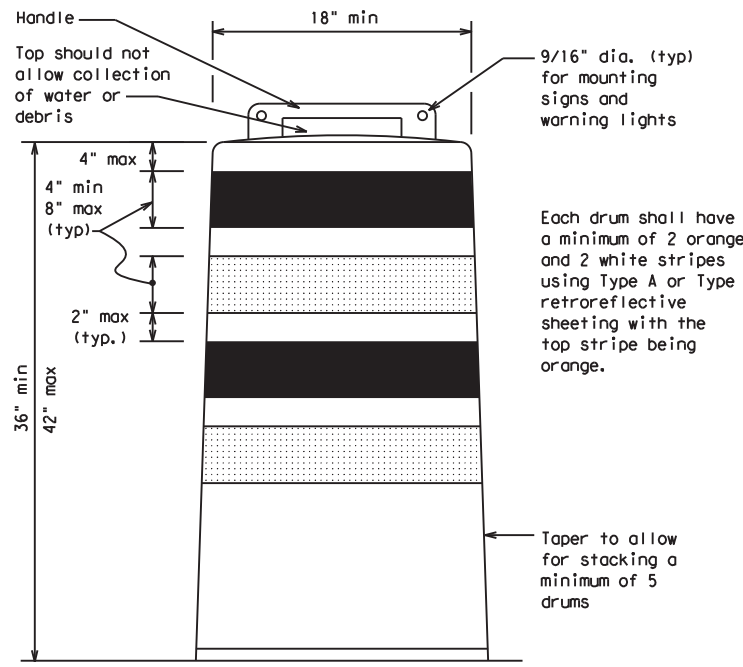


DETECTABLE PEDESTRIAN BARRICADES

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.



18" x 24" Sign
 (Maximum Sign Dimension)
 Chevron CW1-8, Opposing Traffic Lane Divider, Driveway sign D70a, Keep Right R4 series or other signs as approved by Engineer



12" x 24" Vertical Panel
 mount with diagonals sloping down towards travel way

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS

- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B_{FL} or Type C_{FL} Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12




BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (8) - 21

FILE:	bc-21.dgn	DW:	TxDOT	CK:	TxDOT	DW:	TxDOT	CK:	TxDOT
© TxDOT	November 2002	CONT	SECT	JOB	HIGHWAY				
REVISIONS		6469	86	001	SH 25, ETC				
4-03	8-14	DIST	COUNTY	SHEET NO.					
9-07	5-21	WFS	ARCHER, ETC	14					
7-13									


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/20/2024 4:51:37 PM
 FILE: T:\WFDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\2. TCP\BC(1)-21.dgn

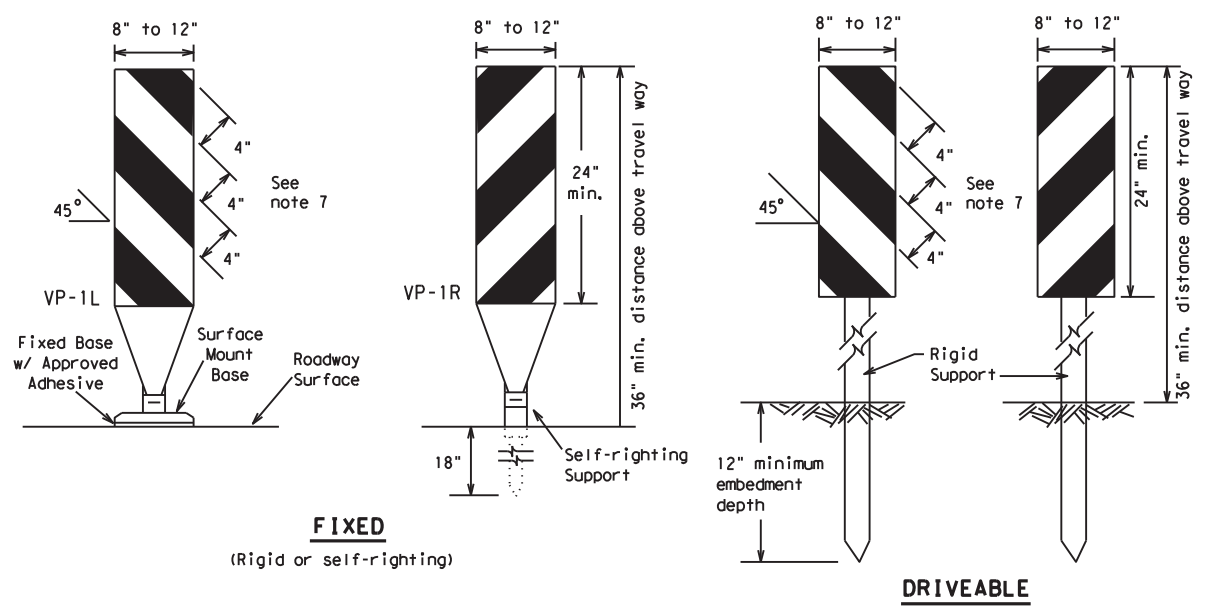

FIXED
(Rigid or self-righting)

DRIVEABLE

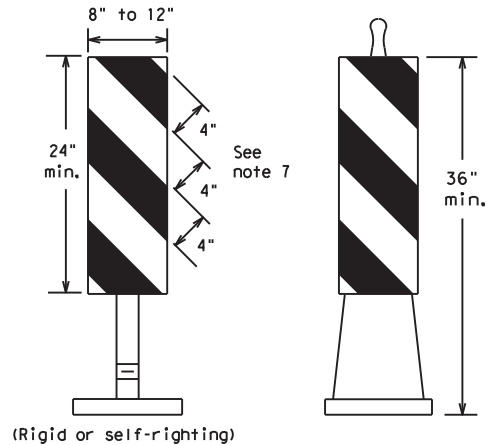


(Rigid or self-righting)

PORTABLE


VERTICAL PANELS (VPs)

- Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
- VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
- VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
- VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
- Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
- Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

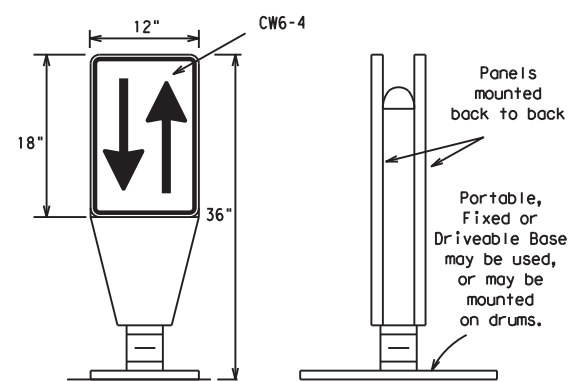

OPPOSING TRAFFIC LANE DIVIDERS (OTLD)


- Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
- The OTLD may be used in combination with 42" cones or VPs.
- Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
- The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

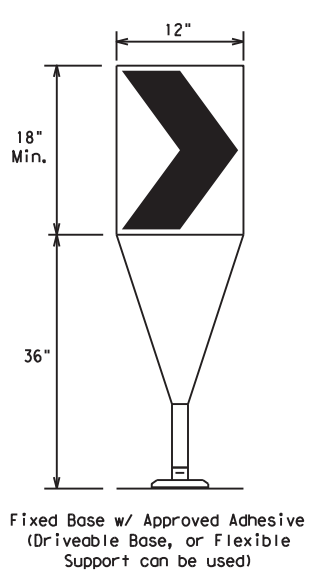

Fixed Base w/ Approved Adhesive (Driveable Base, or Flexible Support can be used)

- The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
- Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
- Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
- To be effective, the chevron should be visible for at least 500 feet.
- Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B_{FL} or Type C_{FL} conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
- For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

CHEVRONS

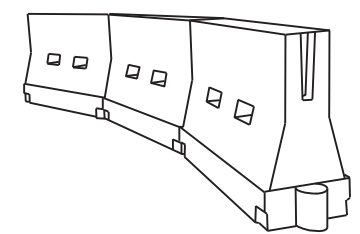

LONGITUDINAL CHANNELIZING DEVICES (LCD)

- LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
- LCDs may be used instead of a line of cones or drums.
- LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
- LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
- LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

WATER BALLASTED SYSTEMS USED AS BARRIERS

- Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
- Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
- Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
- Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
- When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS

GENERAL NOTES

- Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
- Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
- Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
- Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
- The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS ² / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

**Taper lengths have been rounded off.
 L=Length of Taper (FT.) W=Width of Offset (FT.)
 S=Posted Speed (MPH)

SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS

SHEET 9 OF 12



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC (9) - 21


FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	ARCHER, ETC	15	

DATE: 6/20/2024 4:51:39 PM
 FILE: T:\WFSE\DESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\2. TCP\BC(1)-21.dgn
 The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


TYPE 3 BARRICADES

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.




TYPICAL STRIPING DETAIL FOR BARRICADE RAIL

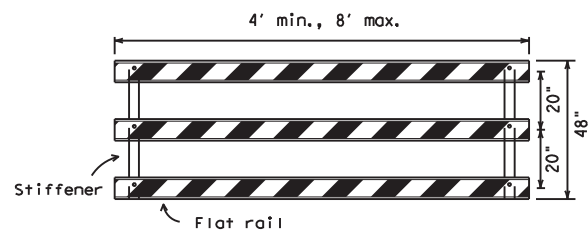


Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES

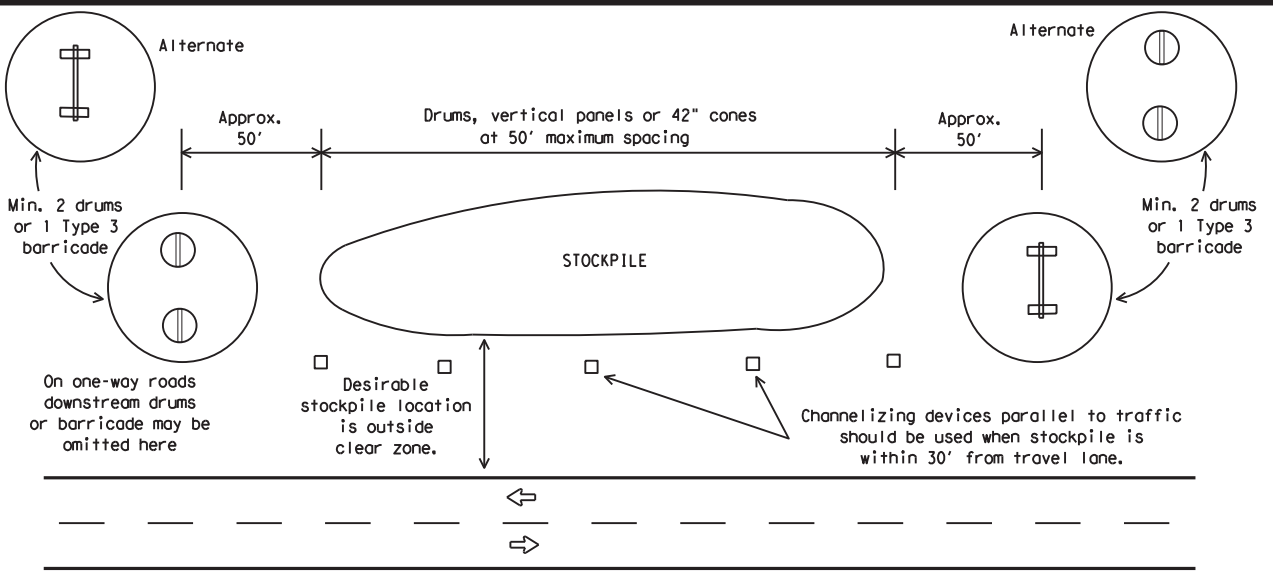


TRAFFIC CONTROL FOR MATERIAL STOCKPILES

Each roadway of a divided highway shall be barricaded in the same manner.

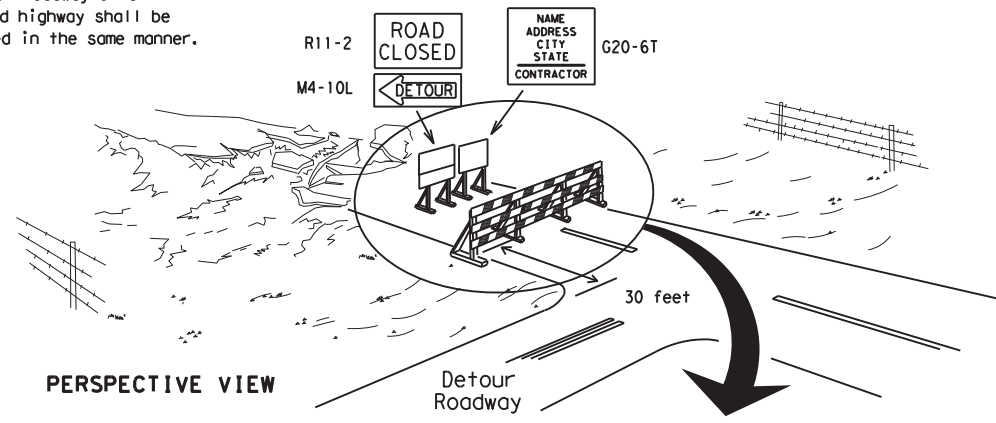

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

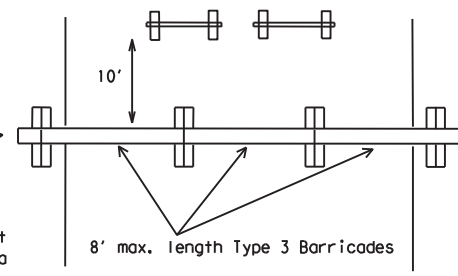

PLAN VIEW


1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION

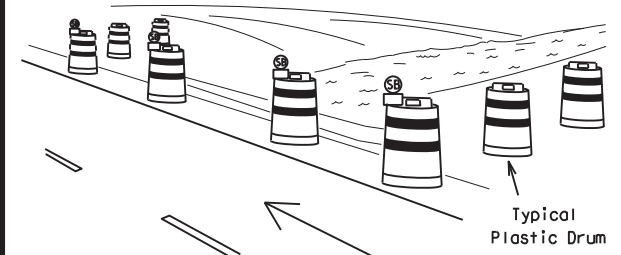

PERSPECTIVE VIEW

These drums are not required on one-way roadway

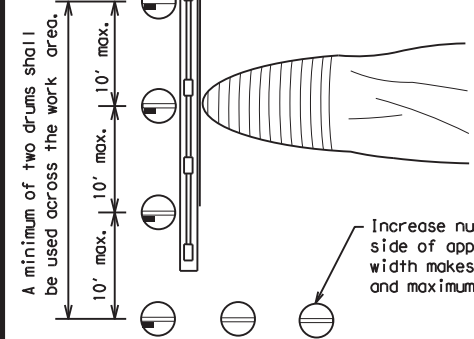


PLAN VIEW

Increase number of plastic drums on the side of approaching traffic if the crown width makes it necessary. (minimum of 2 and maximum of 4 drums)

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS

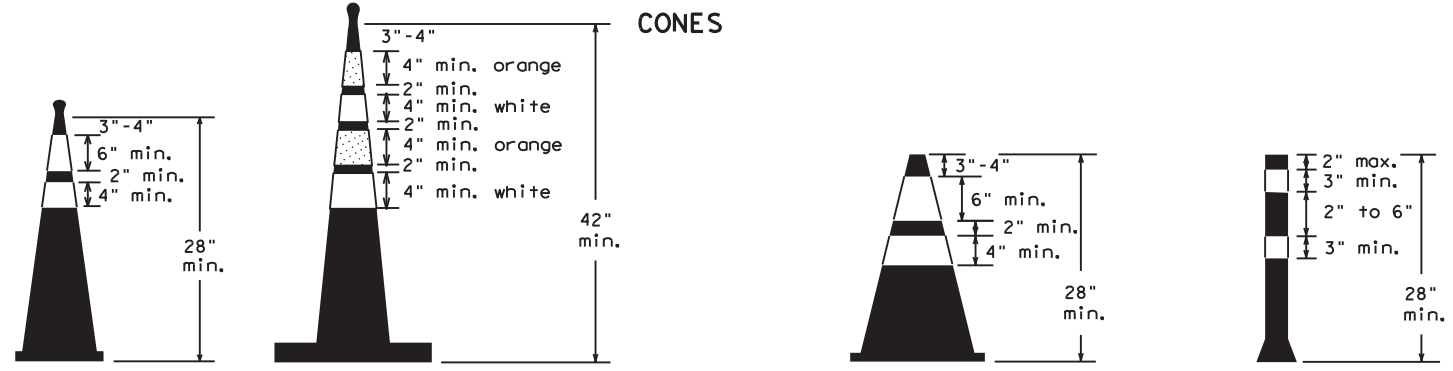

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES

BC(10)-21

FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	OW: TxDOT	CK: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	ARCHER, ETC	16	

WORK ZONE PAVEMENT MARKINGS

GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

Temporary Flexible-Reflective Roadway Marker Tabs

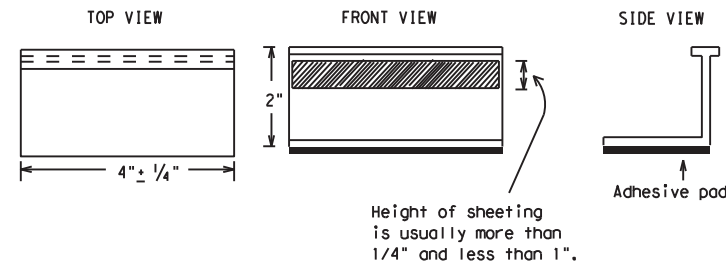

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
 - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
 - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:
 YELLOW - (two amber reflective surfaces with yellow body).
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12



BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

BC(11)-21





FILE: bc-21.dgn	DN: TxDOT	CR: TxDOT	DW: TxDOT	CK: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
2-98 9-07 5-21	DIST	COUNTY	SHEET NO.	
1-02 7-13	WFS	ARCHER, ETC	17	
11-02 8-14				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/20/2024 4:51:41 PM
 FILE: T:\WFDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\2. TCP\BC(11)-21.dgn

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.



DATE: 6/20/2024 4:51:42 PM
 FILE: T:\WFS\DESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\2. TCP\BC(12)-21.dgn

PAVEMENT MARKING PATTERNS

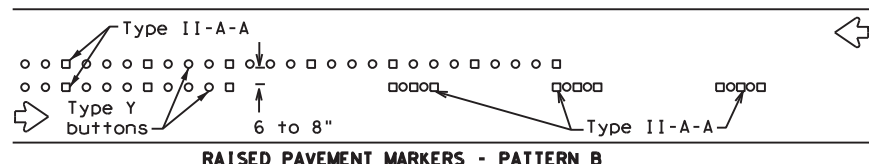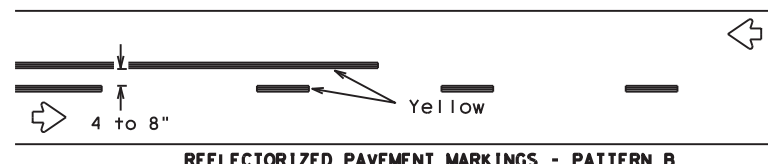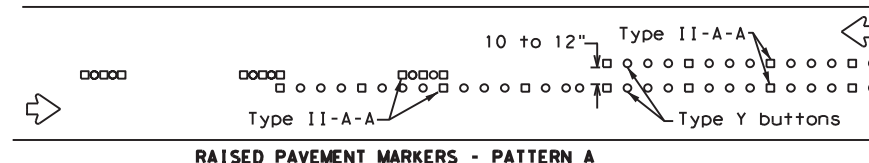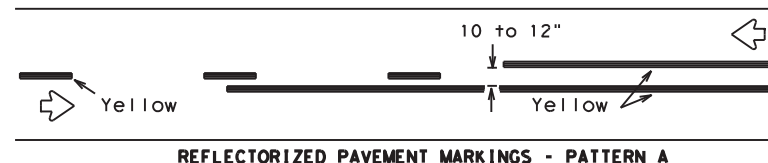



Pattern A is the TxDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.

CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

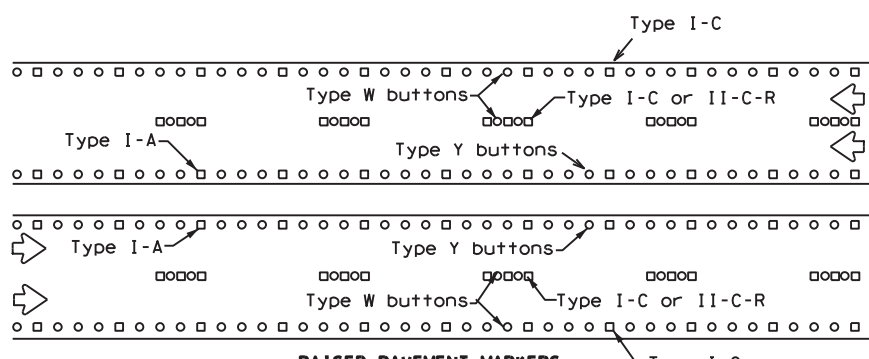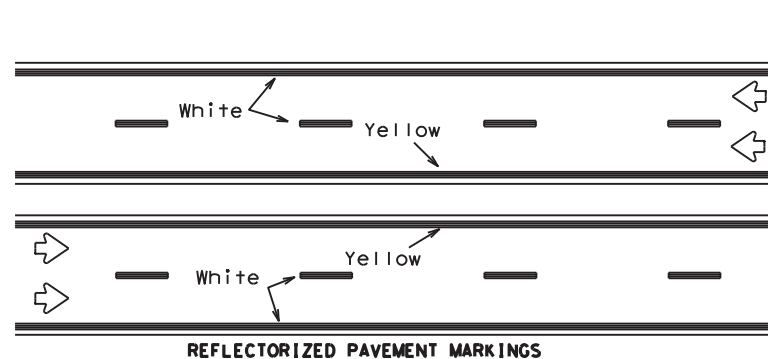



Prefabricated markings may be substituted for reflectorized pavement markings.

EDGE & LANE LINES FOR DIVIDED HIGHWAY

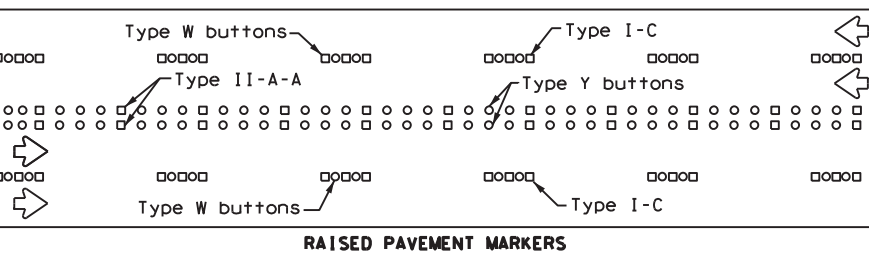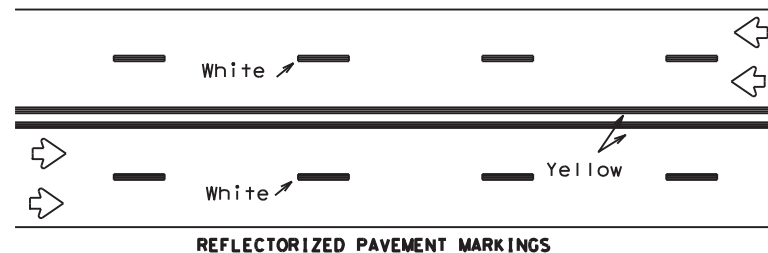

Prefabricated markings may be substituted for reflectorized pavement markings.





LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

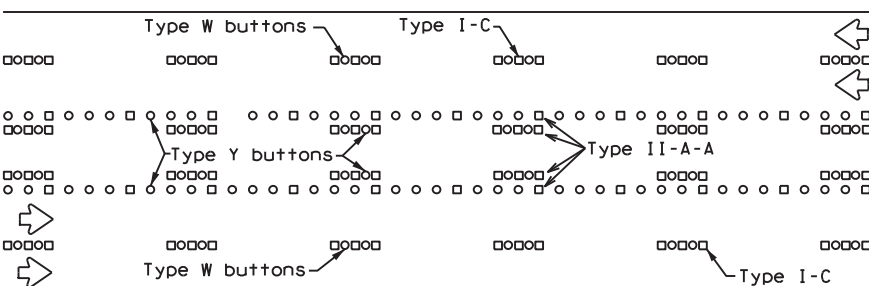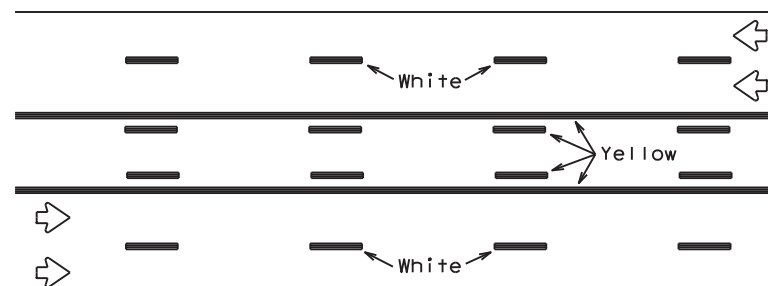


Prefabricated markings may be substituted for reflectorized pavement markings.

TWO-WAY LEFT TURN LANE

STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

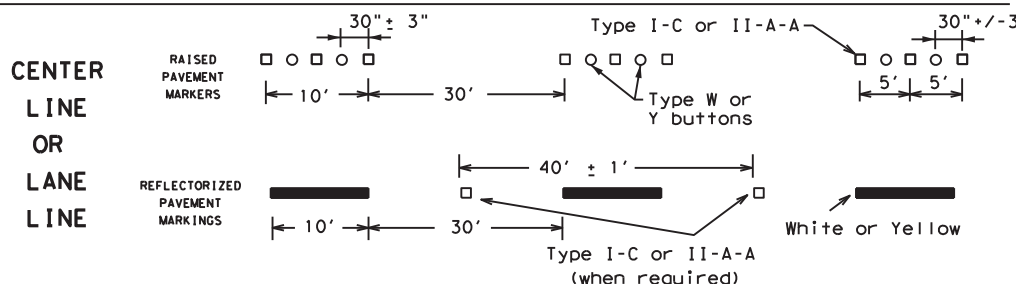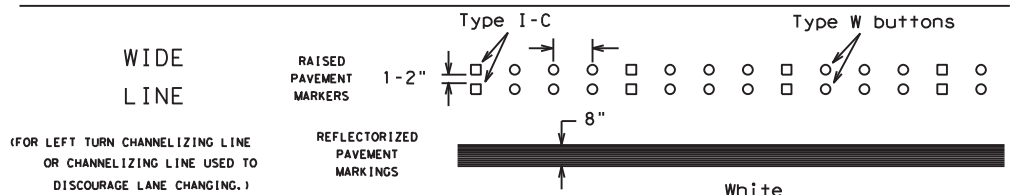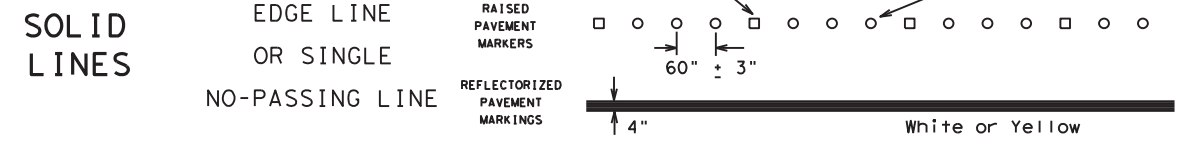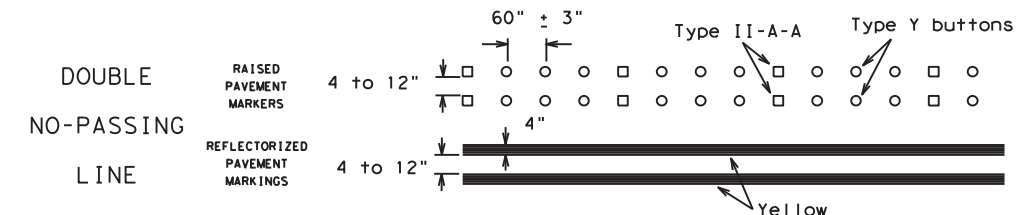


BROKEN LINES

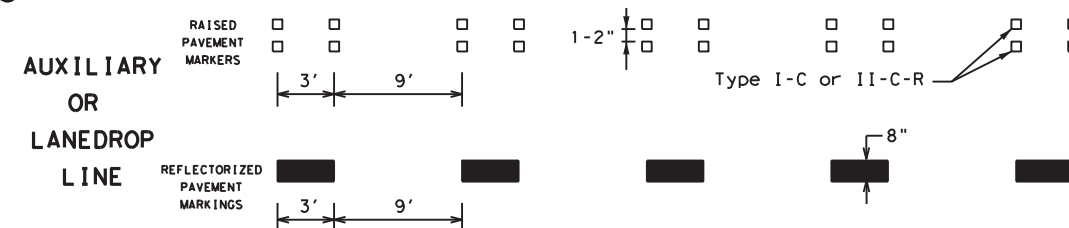

REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

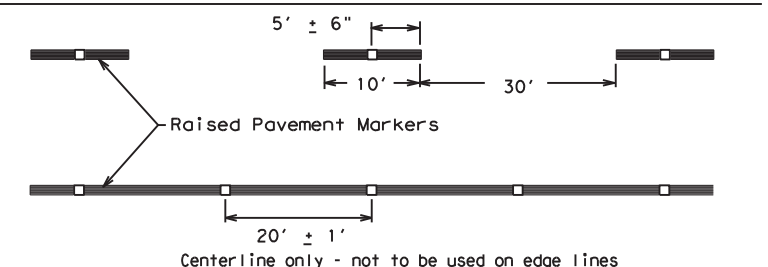

SHEET 12 OF 12

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

Texas Department of Transportation

Traffic Safety Division Standard


BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC(12)-21

FILE: bc-21.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	WFS	ARCHER, ETC	18	
11-02 8-14				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the use of this standard in any manner other than that intended by the original author.

DATE: 6/20/2024 4:51:43 PM
 FILE: T:\WFDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\CP1-1-18.dgn

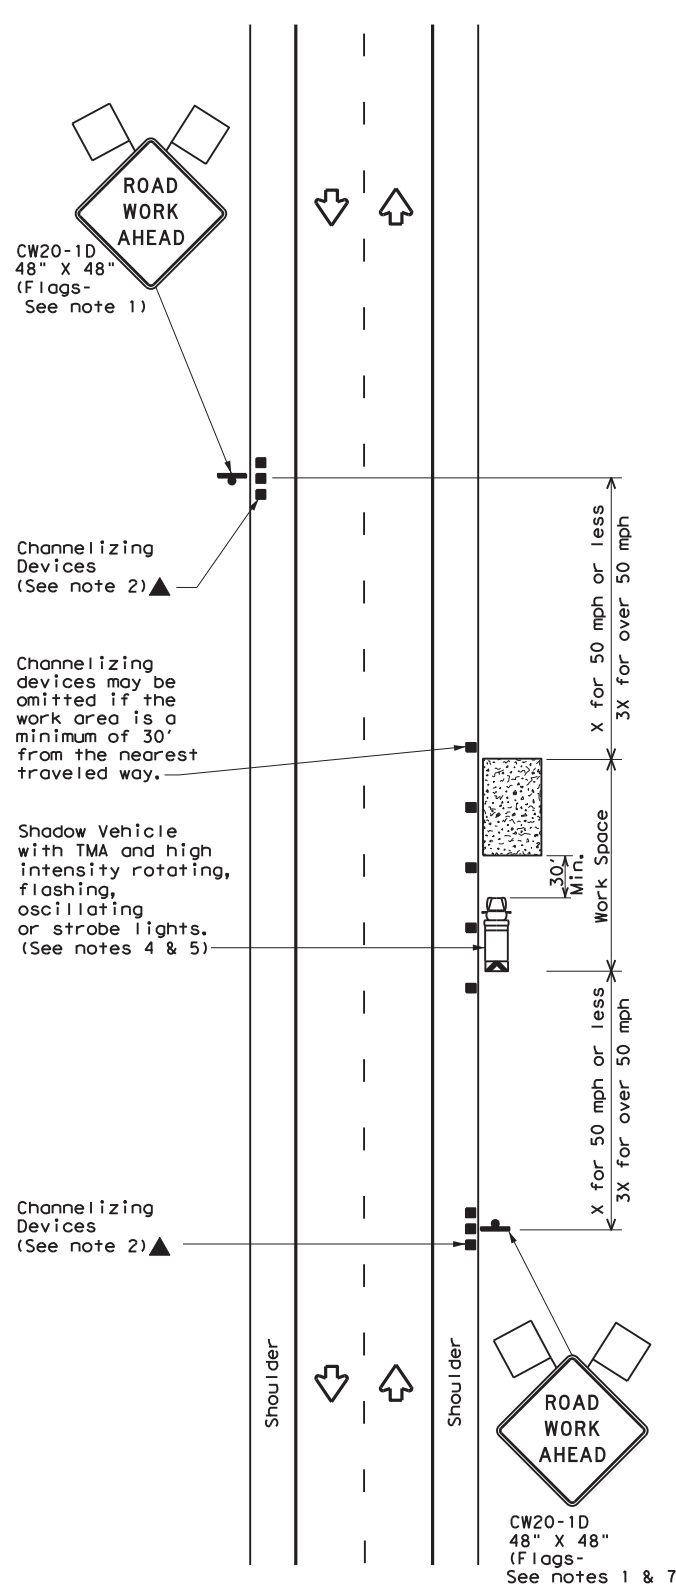


TCP (1-1a)

WORK SPACE NEAR SHOULDER
Conventional Roads

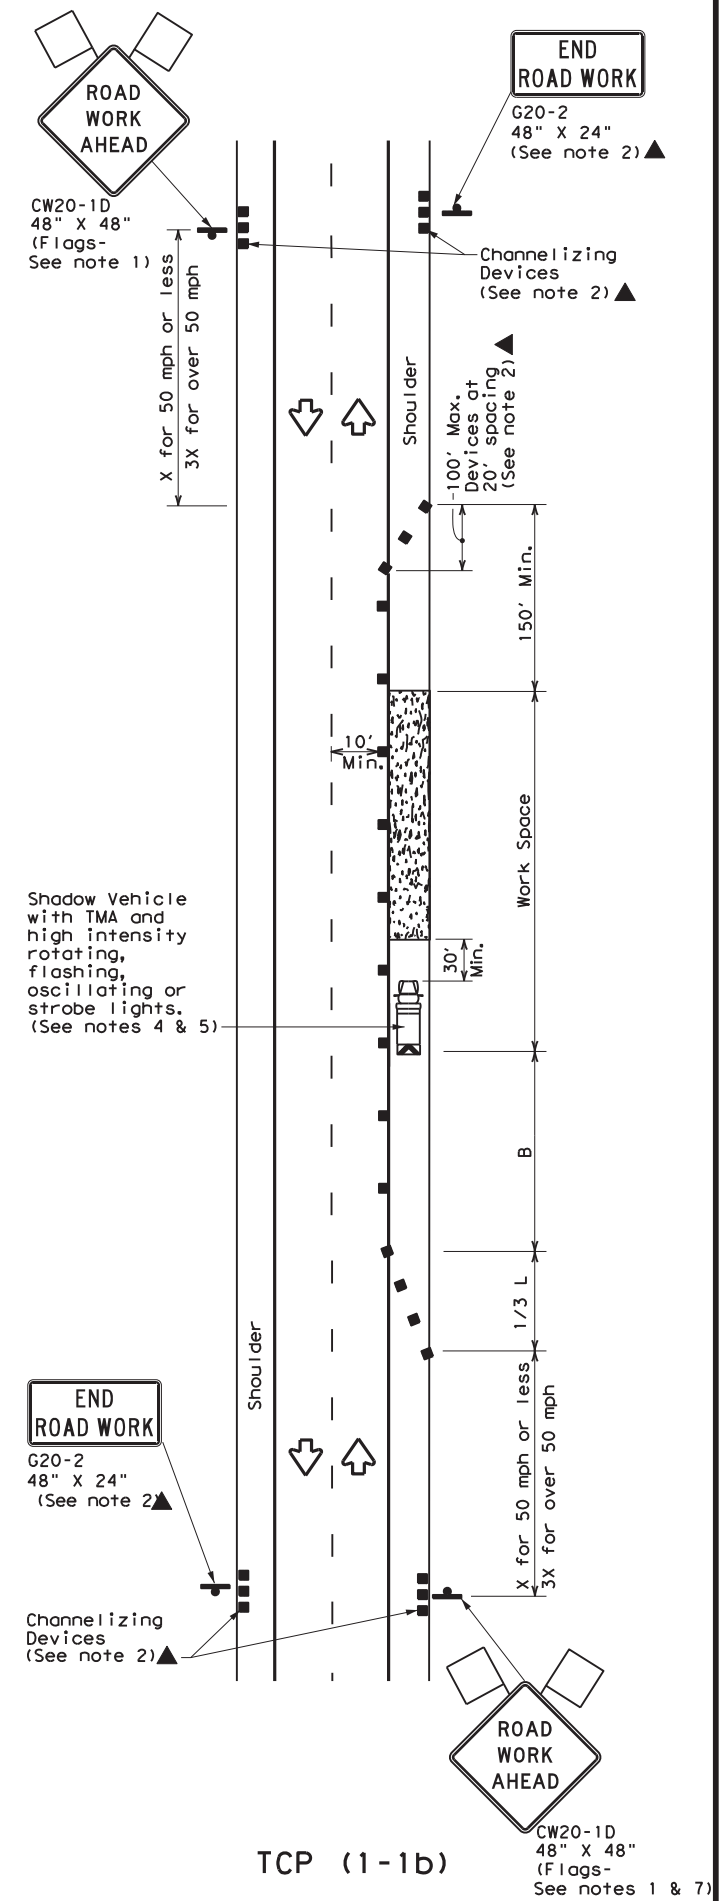

TCP (1-1b)

WORK SPACE ON SHOULDER
Conventional Roads

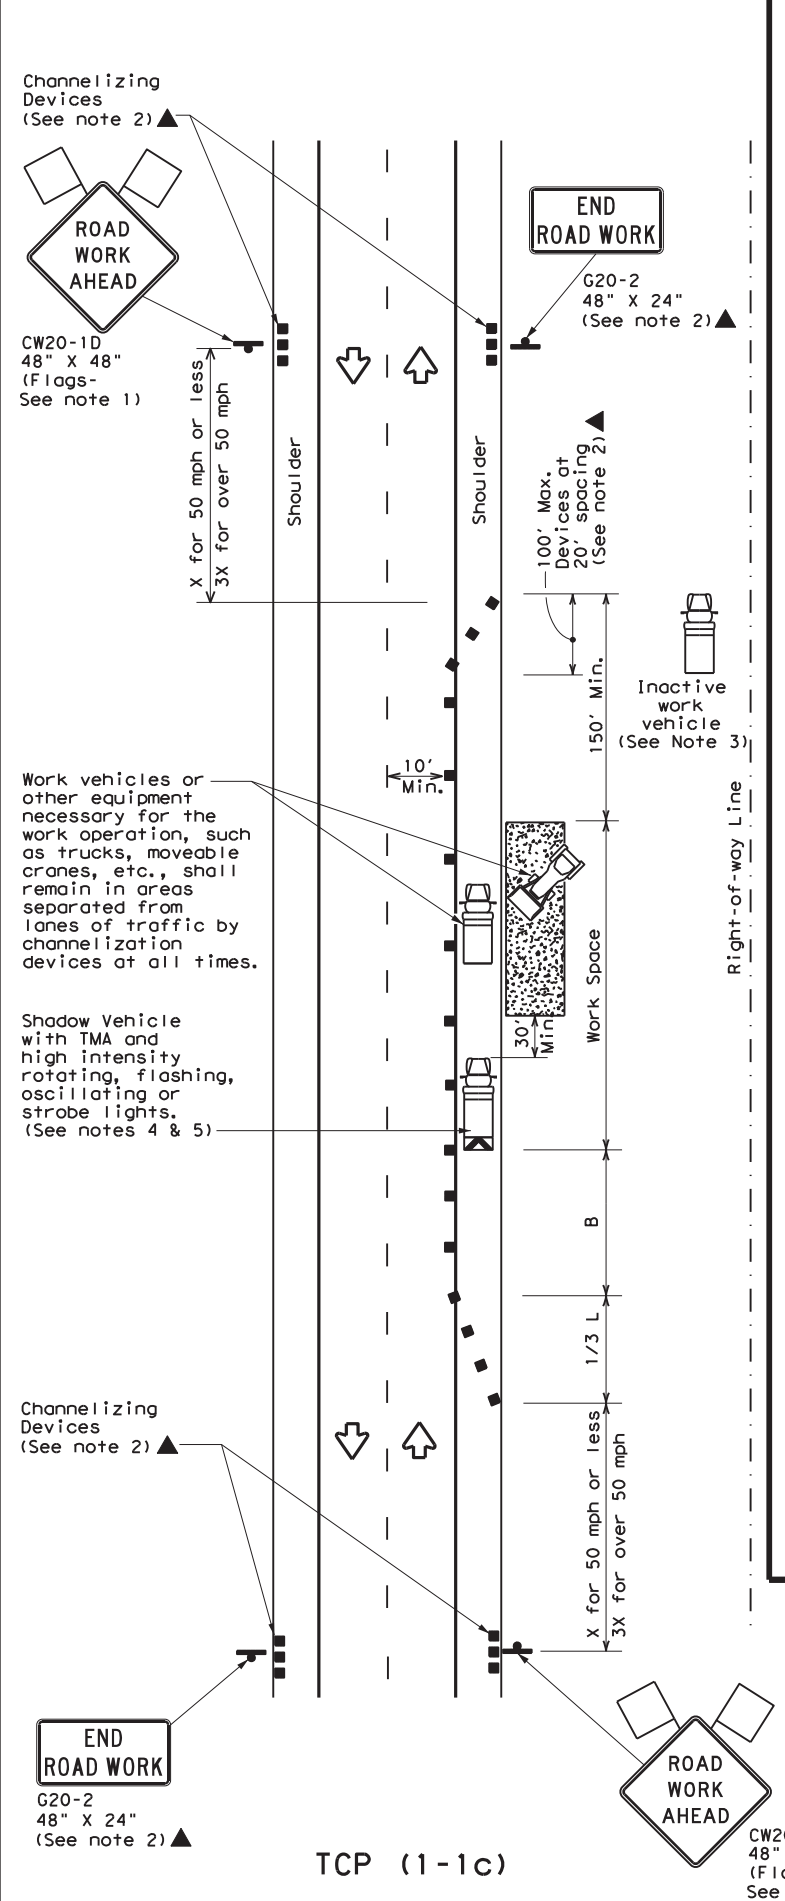

TCP (1-1c)

WORK VEHICLES ON SHOULDER
Conventional Roads

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

- GENERAL NOTES**
- Flags attached to signs where shown are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated elsewhere in the plans, or for routine maintenance work, when approved by the Engineer.
 - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW20-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.




TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK

TCP (1-1) - 18

FILE: tcp1-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	WFS	ARCHER, ETC	19	
1-97 2-18				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/20/2024 4:51:46 PM
 FILE: T:\WFDESIGN\Plans\WFS_Standards\DCNs\TCP\TCP (2-1) -18.dgn

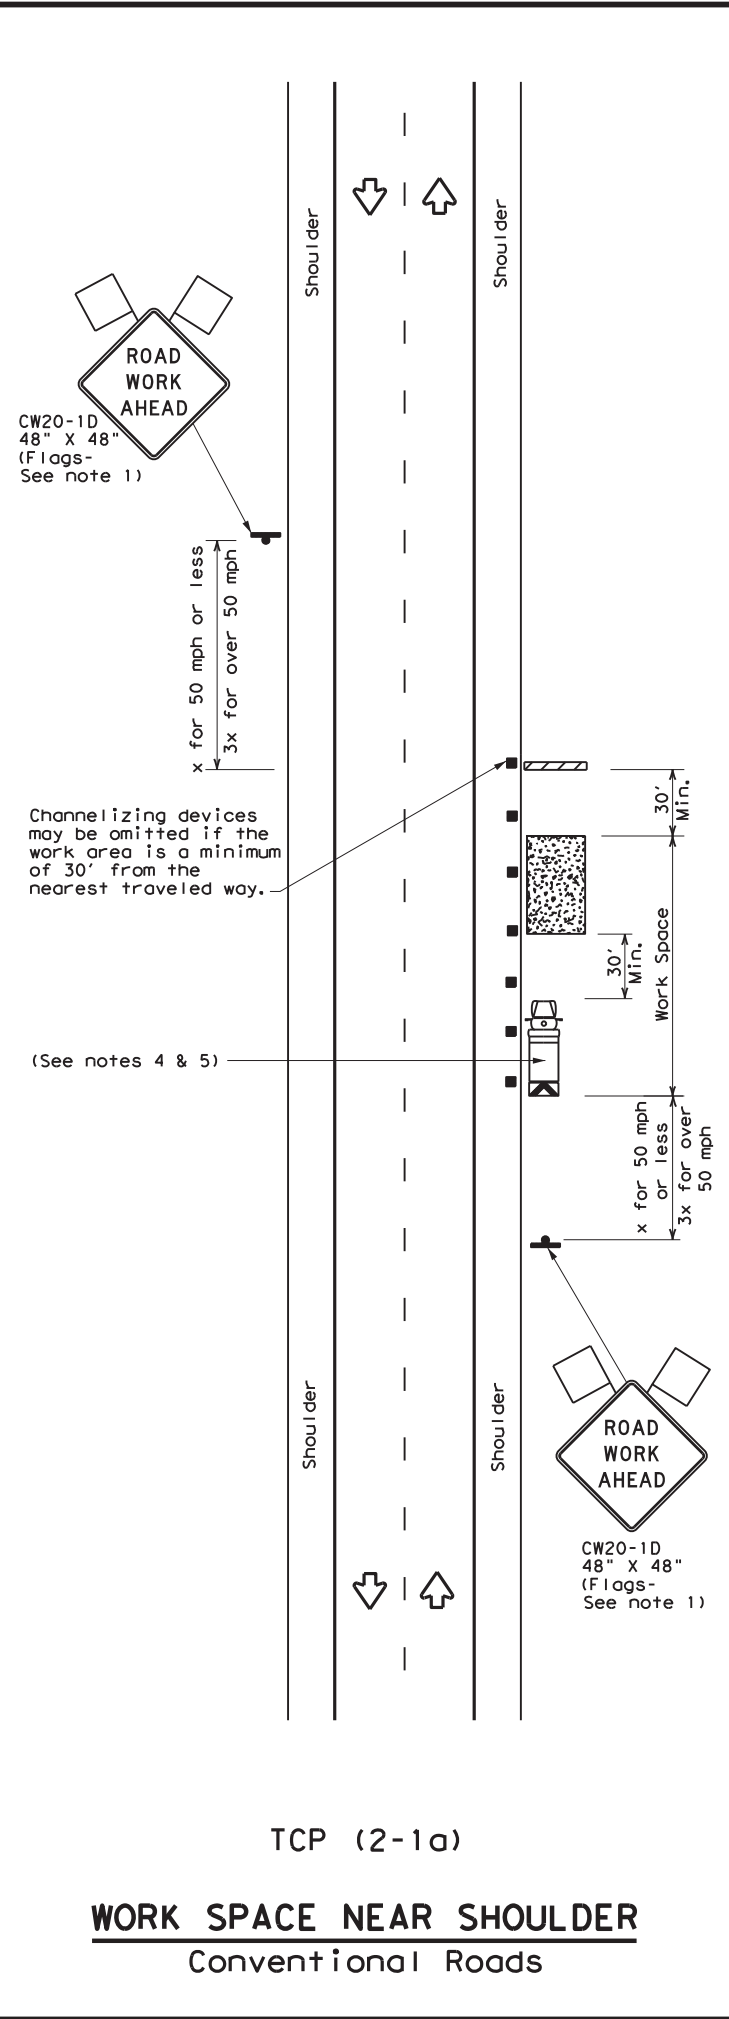


TCP (2-1a)

WORK SPACE NEAR SHOULDER
 Conventional Roads

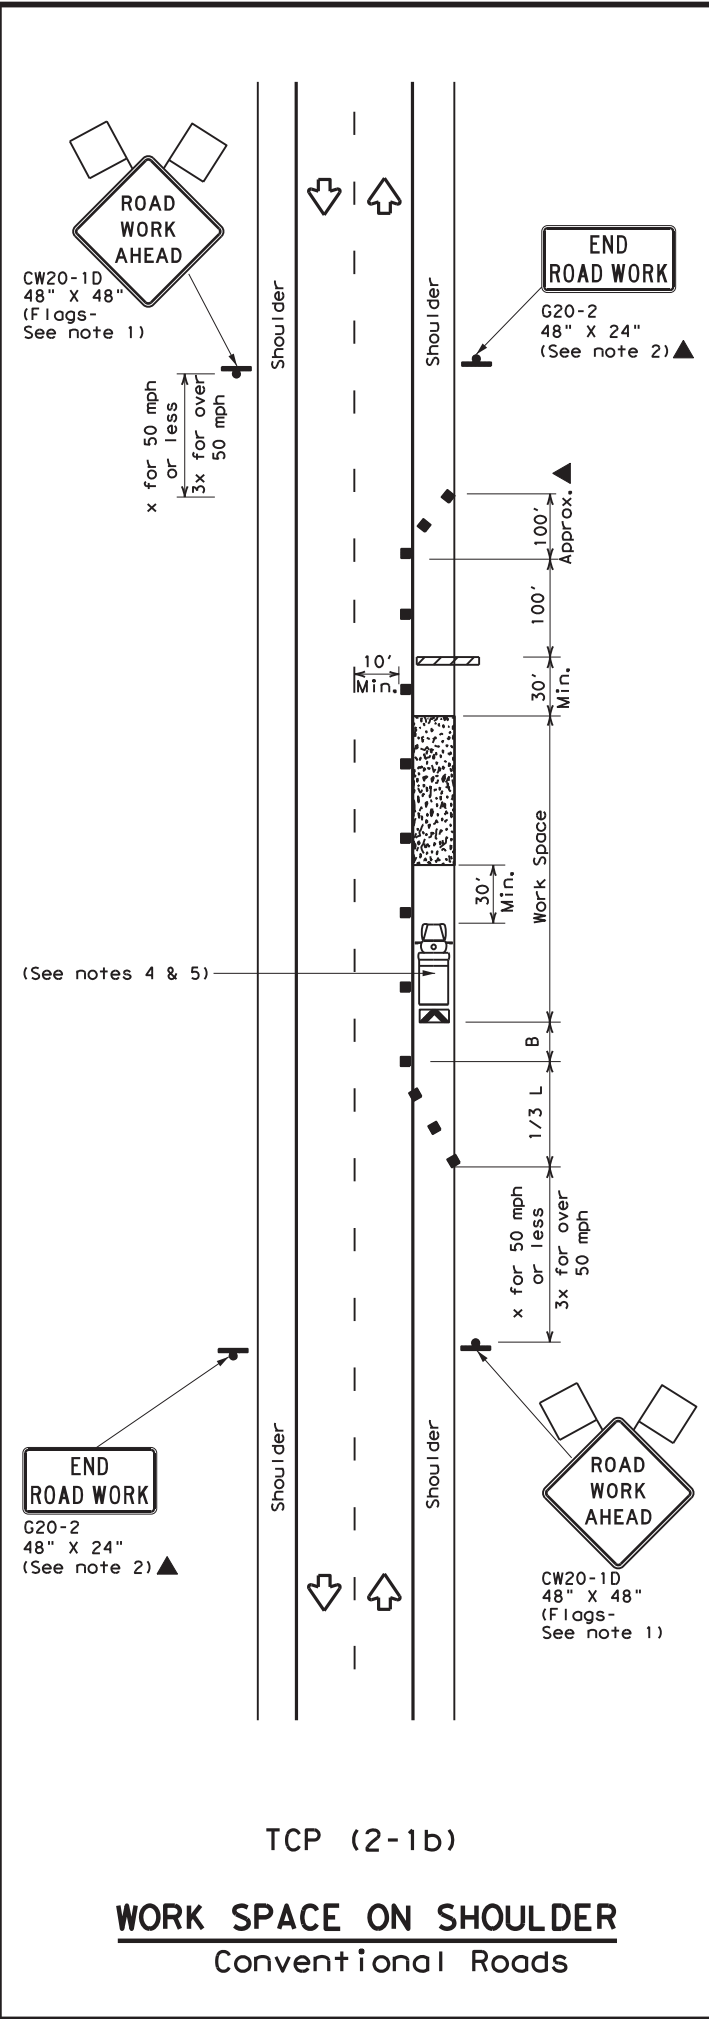

TCP (2-1b)

WORK SPACE ON SHOULDER
 Conventional Roads

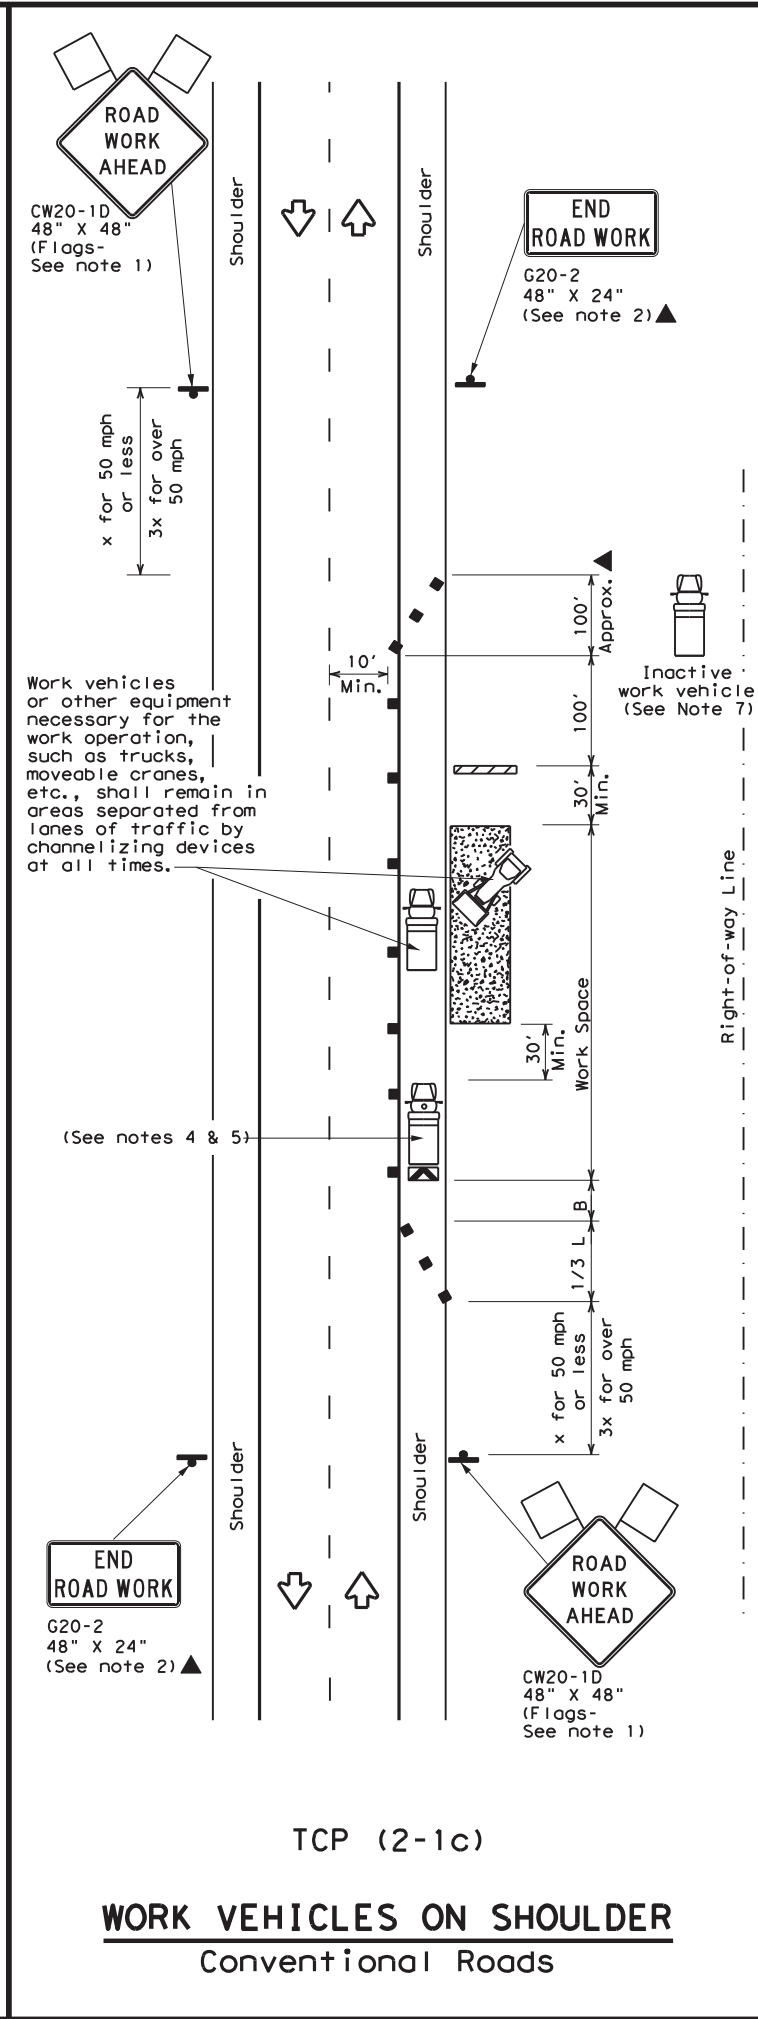

TCP (2-1c)

WORK VEHICLES ON SHOULDER
 Conventional Roads

LEGEND			
	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Board		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	$L = \frac{WS^2}{60}$	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓	✓	✓

- GENERAL NOTES**
- Flags attached to signs where shown, are REQUIRED.
 - All traffic control devices illustrated are REQUIRED, except those denoted with the triangle symbol may be omitted when stated in the plans, or for routine maintenance work, when approved by the Engineer.
 - Stockpiled material should be placed a minimum of 30 feet from nearest traveled way.
 - Shadow Vehicle with TMA and high intensity rotating, flashing, oscillating or strobe lights. A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
 - Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect a wider work space.
 - See TCP(5-1) for shoulder work on divided highways, expressways and freeways.
 - Inactive work vehicles or other equipment should be parked near the right-of-way line and not parked on the paved shoulder.
 - CW21-5 "SHOULDER WORK" signs may be used in place of CW21-1D "ROAD WORK AHEAD" signs for shoulder work on conventional roadways.

Texas Department of Transportation
 Traffic Operations Division Standard

TRAFFIC CONTROL PLAN
CONVENTIONAL ROAD
SHOULDER WORK

TCP (2-1) - 18


FILE: tcp2-1-18.dgn	DN:	CK:	DW:	CK:
© TxDOT December 1985	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
2-94 4-98	DIST	COUNTY	SHEET NO.	
8-95 2-12	WFS	ARCHER, ETC	21	
1-97 2-18				

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

RUMBLE STRIP GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Removal of the Temporary Rumble Strips should be accomplished before removing the advance warning signs.
- Temporary Rumble Strips, and the rumble strip functioning as a STOP bar, should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.

Warning sign and rumble strip sequence in opposite direction is same as below

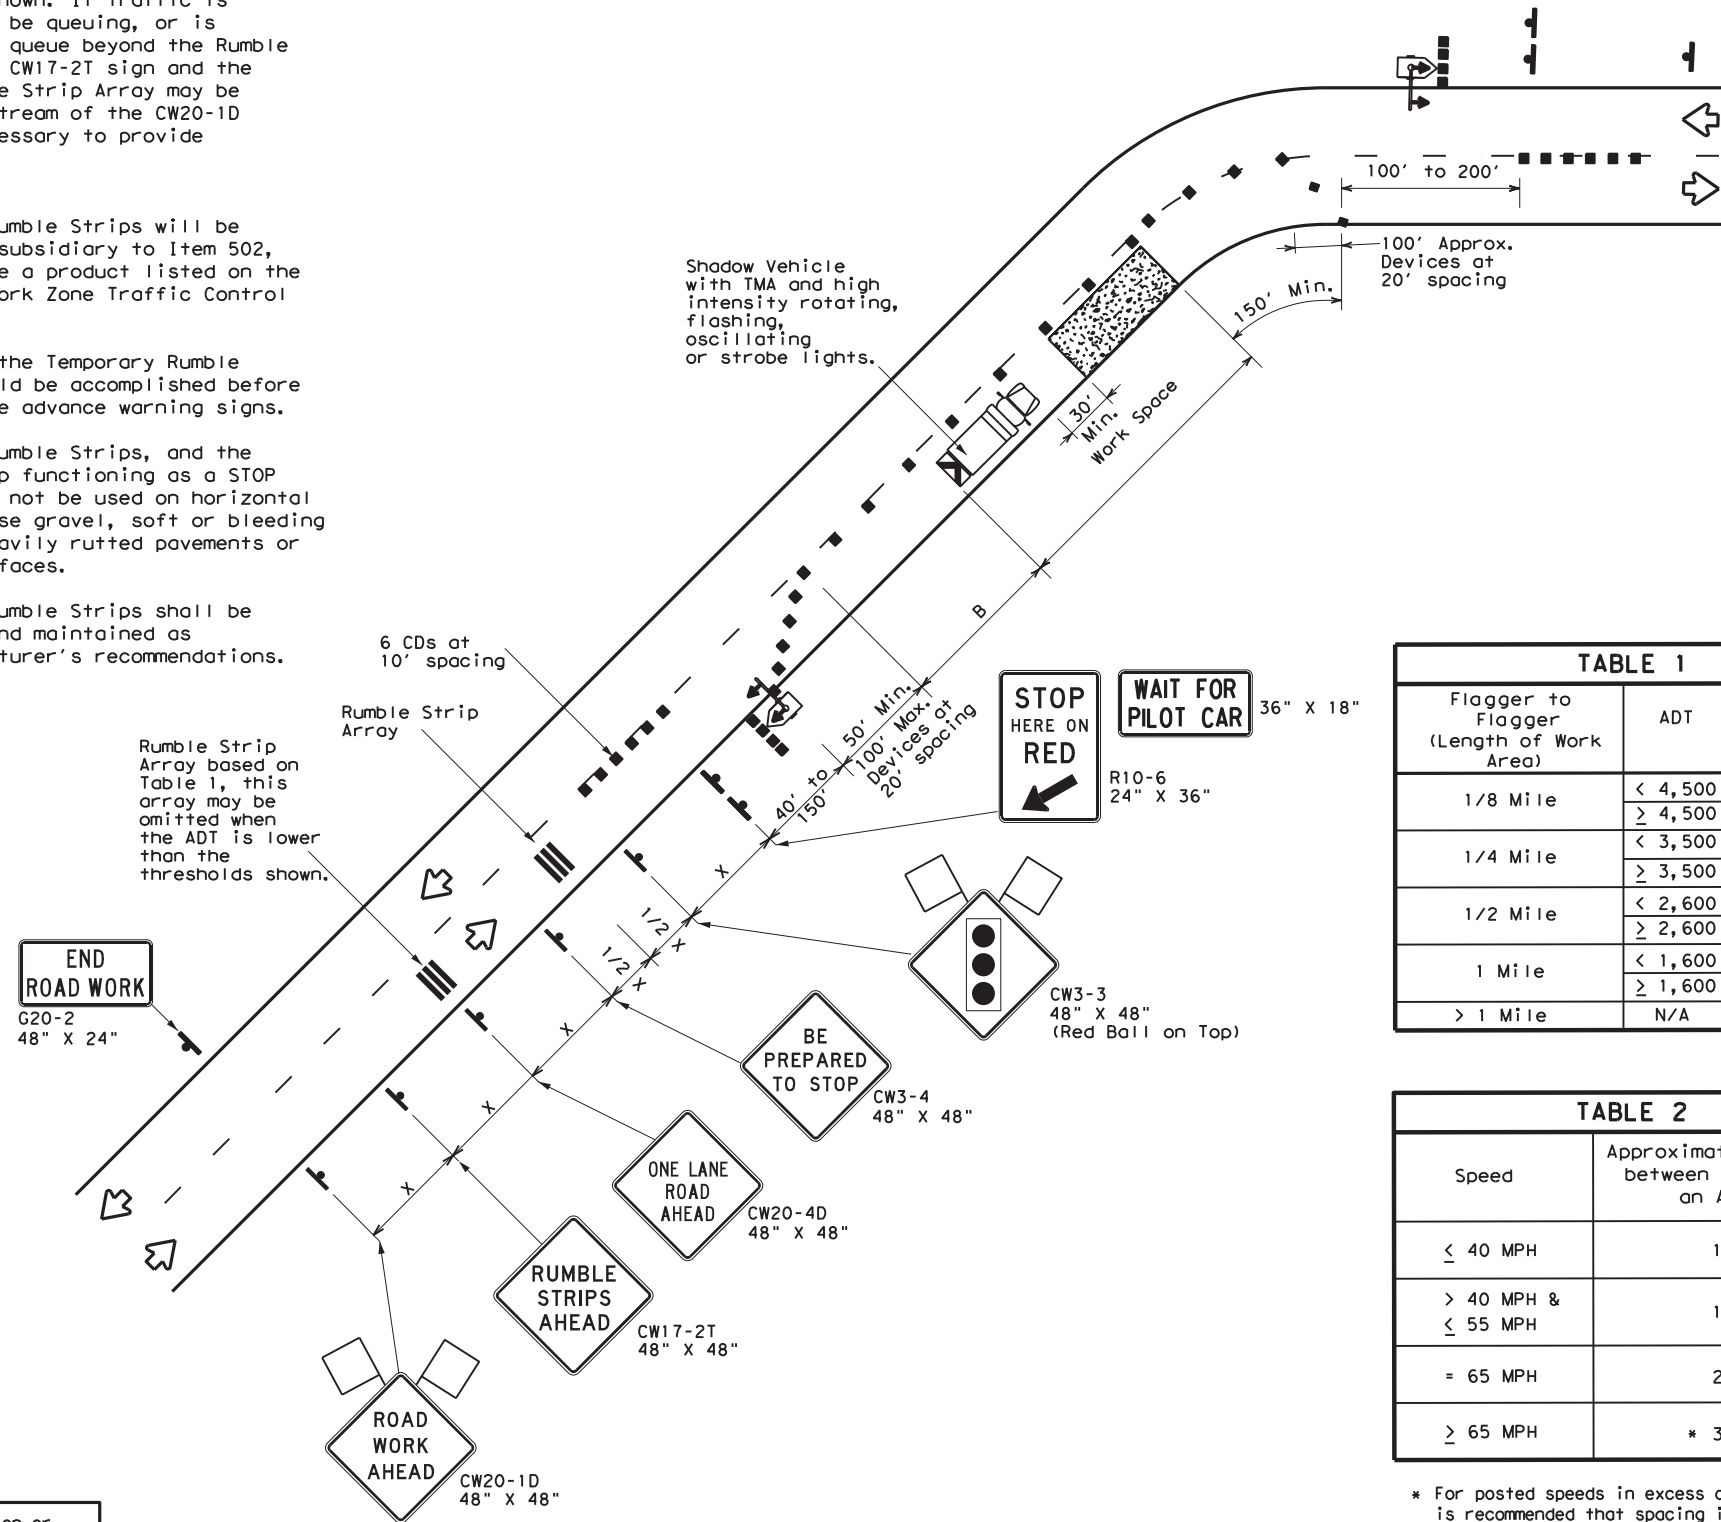

For construction or maintenance contract work, specific project requirements for shadow vehicles can be found in the project GENERAL NOTES for Item 502, Barricades, Signs and Traffic Handling.

ONE LANE TWO-WAY CONTROL WITH PORTABLE TRAFFIC SIGNAL & RUMBLE STRIPS

TABLE 1

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

TABLE 2

Speed	Approximate distance between strips in an Array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 65 MPH	20'
≥ 65 MPH	* 35' +

* For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

REVIEWED AND APPROVED BY DISTRICT SAFETY REVIEW TEAM 1-21-2022

LEGEND

	Type 3 Barricade		Channelizing Devices (CDs)
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Temporary or Portable Traffic Signal		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"	Stopping Sight Distance
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent			
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'	200'
35		205'	225'	245'	35'	70'	160'	120'	250'
40		265'	295'	320'	40'	80'	240'	155'	305'
45	L = WS	450'	495'	540'	45'	90'	320'	195'	360'
50		500'	550'	600'	50'	100'	400'	240'	425'
55		550'	605'	660'	55'	110'	500'	295'	495'
60		600'	660'	720'	60'	120'	600'	350'	570'
65		650'	715'	780'	65'	130'	700'	410'	645'
70		700'	770'	840'	70'	140'	800'	475'	730'
75		750'	825'	900'	75'	150'	900'	540'	820'


* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT) S=Posted Speed (MPH)

TYPICAL USAGE

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

TCP GENERAL NOTES

- Flags attached to signs where shown are REQUIRED.
- Portable traffic signals should be located to provide adequate stopping sight distance for approaching motorists (See table above).
- A Shadow Vehicle with a TMA should be used anytime it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the performance or quality of the work. If workers are no longer present but road or work conditions require the traffic control to remain in place, Type 3 Barricades or other channelizing devices may be substituted for the Shadow Vehicle and TMA.
- Additional Shadow Vehicles with TMAs may be positioned off the paved surface, next to those shown in order to protect wider work spaces.
- The R10-6 "STOP HERE ON RED" arrow sign shall be offset so as not to obscure the lenses of the Portable Traffic Signals.
- Proper alignment of overhead signal with on-coming lane should be ensured.
- For Short Duration and Short Term Stationary refer to WZ(RS)-22 for rumble strip placement and signs.
- Use of a pilot car shall be required as directed by the Engineer, when a pilot car is being used it may control the operation of the signal and the "WAIT FOR PILOT CAR" sign is to be used as shown.
- If pilot car is used to guide vehicles through traffic control zone, vehicle shall have an identification name displayed and "PILOT CAR FOLLOW ME" (G20-4) sign or message board mounted in a conspicuous position on rear.
- Channelizing devices on the center-line may be omitted when a pilot car is leading traffic and approved by the Engineer.



Andrew Mosley, P.E.

06/20/2024

Texas Department of Transportation
 Wichita Falls District

**TRAFFIC CONTROL PLAN
 ONE LANE TWO-WAY CONTROL
 USING
 PORTABLE TRAFFIC SIGNAL
 & RUMBLE STRIPS**


© TxDOT May 2014		DN: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
REVISIONS					
CONT	SECT	JOB	HIGHWAY		
6469	86	001	SH 25, ETC		
DIST	COUNTY		SHEET NO.		
WFS	ARCHER, ETC		23		

DATE:
FILE:


DATE: 6/20/2024 4:51:49 PM
 FILE: T:\WFDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\G:\bpm\rs\rs22.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any kind of units or for the use of any equipment, materials, or methods for incorrect results or damages resulting from its use.

Warning sign and rumble strip sequence in opposite direction is same as below.

Flagger to Flagger (Length of Work Area)	ADT	# of Rumble Strip Arrays
1/8 Mile	< 4,500	1
	≥ 4,500	2
1/4 Mile	< 3,500	1
	≥ 3,500	2
1/2 Mile	< 2,600	1
	≥ 2,600	2
1 Mile	< 1,600	1
	≥ 1,600	2
> 1 Mile	N/A	2

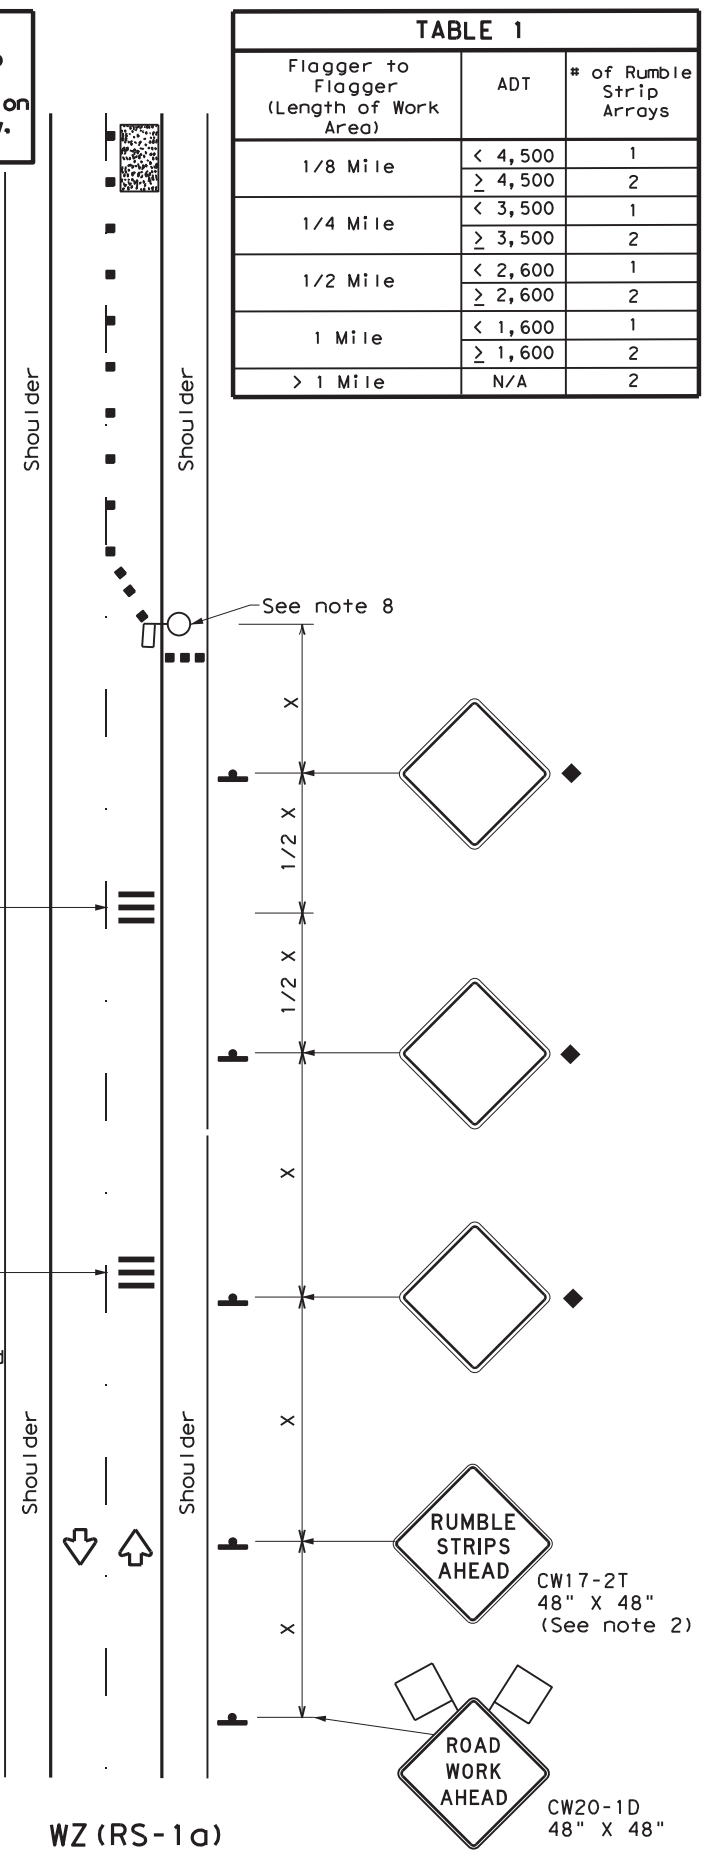

RUMBLE STRIPS ON ONE-LANE TWO-WAY APPLICATION

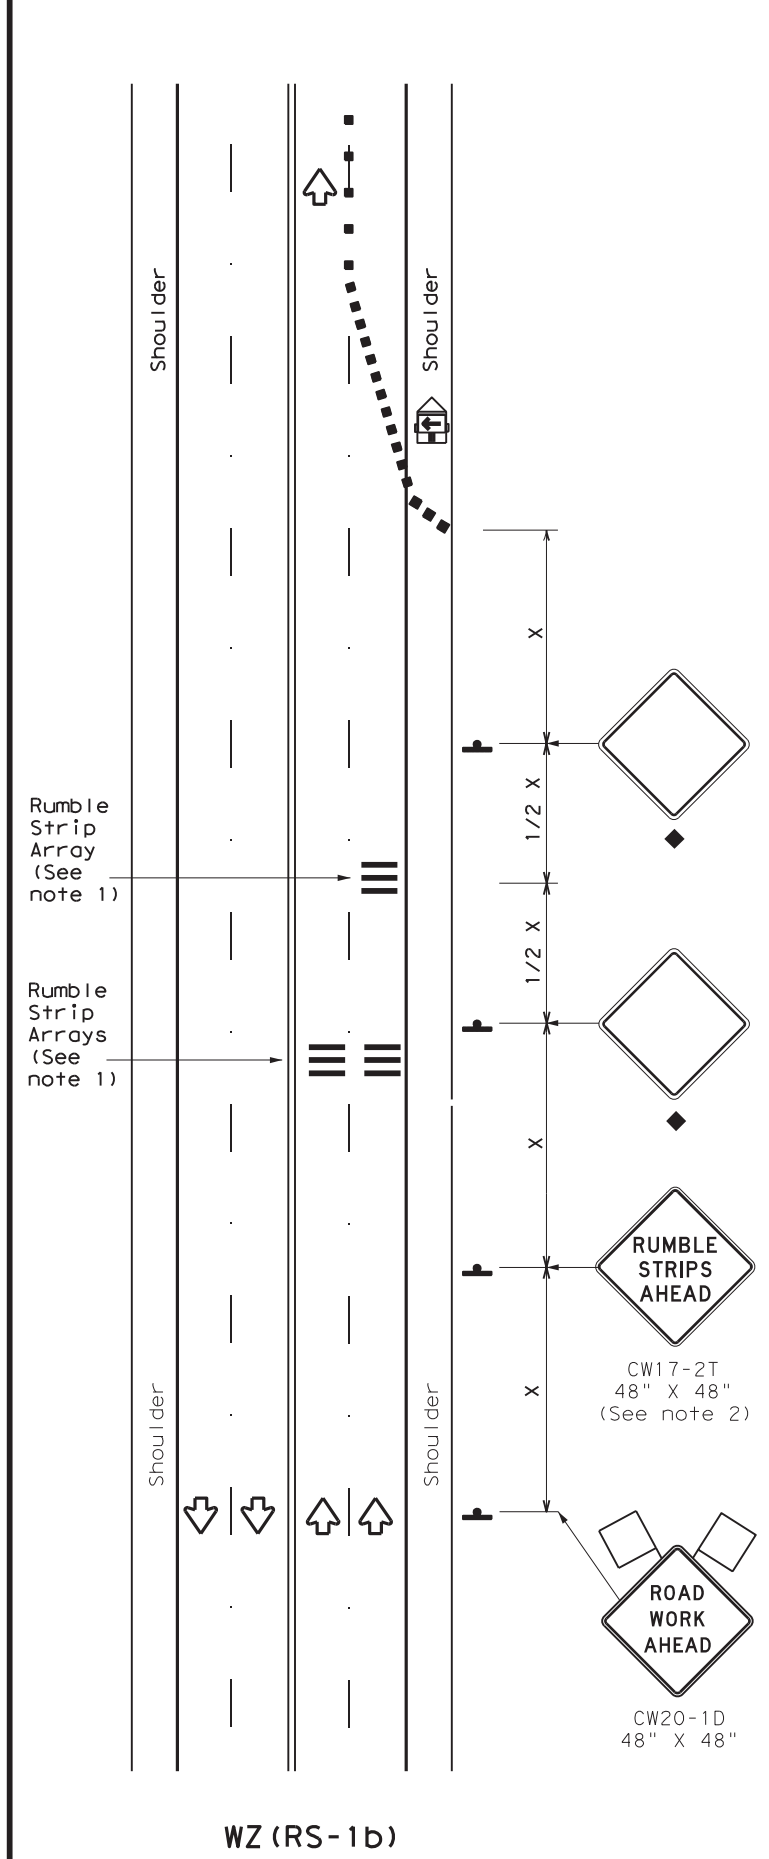

RUMBLE STRIPS FOR LANE CLOSURE ON CONVENTIONAL ROADWAY

GENERAL NOTES

- Each Rumble Strip Array should consist of three rumble strips spaced center to center at the spacing shown in Table 2, placed transverse across the lane at locations shown.
- The CW17-2T "RUMBLE STRIPS AHEAD" sign should be located after the CW20-1D "ROAD WORK AHEAD" sign and spaced as shown. If traffic is observed to be queuing, or is expected to queue beyond the Rumble Strips, the CW17-2T sign and the first Rumble Strip Array may be located upstream of the CW20-1D sign as necessary to provide needed warning.
- Temporary Rumble Strips will be considered subsidiary to Item 502, and shall be a product listed on the Compliant Work Zone Traffic Control Devices.
- Remove Temporary Rumble Strips before removing the advanced warning signs.
- Temporary Rumble Strips should not be used on horizontal curves, loose gravel, soft or bleeding asphalt, heavily rutted pavements or unpaved surfaces.
- Temporary Rumble Strips shall be installed and maintained as per manufacturer's recommendations.
- This standard sheet shall be used in conjunction with other appropriate TCP standard, TMUTCD typical application or project specific detail for the project.
- The one-lane two-way application may utilize a flagger, an Automated Flagger Assistance Device (AFAD) or a Portable Traffic Signal (PTS).
- Replace defective Temporary Rumble Strips as directed by the Engineer.
- Temporary Rumble Strips may be used on freeways or expressways based on engineering judgment and written direction from the Engineer.

Speed	Approximate distance between strips in an array
≤ 40 MPH	10'
> 40 MPH & ≤ 55 MPH	15'
= 60 MPH	20'
≥ 65 MPH	* 35' +

	Type 3 Barricade		Channelizing Devices
	Heavy Work Vehicle		Truck Mounted Attenuator (TMA)
	Trailer Mounted Flashing Arrow Panel		Portable Changeable Message Sign (PCMS)
	Sign		Traffic Flow
	Flag		Flagger

Posted Speed *	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices		Minimum Sign Spacing "X" Distance	Suggested Longitudinal Buffer Space "B"
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent		
30	L = WS ² / 60	150'	165'	180'	30'	60'	120'	90'
35		205'	225'	245'	35'	70'	160'	120'
40		265'	295'	320'	40'	80'	240'	155'
45	L = WS	450'	495'	540'	45'	90'	320'	195'
50		500'	550'	600'	50'	100'	400'	240'
55		550'	605'	660'	55'	110'	500'	295'
60		600'	660'	720'	60'	120'	600'	350'
65		650'	715'	780'	65'	130'	700'	410'
70		700'	770'	840'	70'	140'	800'	475'
75		750'	825'	900'	75'	150'	900'	540'

* Conventional Roads Only
 ** Taper lengths have been rounded off.
 L=Length of Taper (FT) W=Width of Offset (FT)
 S=Posted Speed (MPH)

MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
	✓	✓		

◆ Signs are for illustrative purposes only. Signs required may vary depending on the TCP, TMUTCD Typical Application, or project specific details for the project.




* For posted speeds in excess of 65 MPH, it is recommended that spacing is increased as speed limits increase. Increasing space between rumble strips will improve effectiveness.

Texas Department of Transportation
 Traffic Safety Division Standard

TEMPORARY RUMBLE STRIPS

WZ (RS) - 22

FILE: wzrs22.dgn	DN: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
© TxDOT November 2012	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
2-14 1-22	DIST	COUNTY	SHEET NO.	
4-16	WFS	ARCHER, ETC	24	

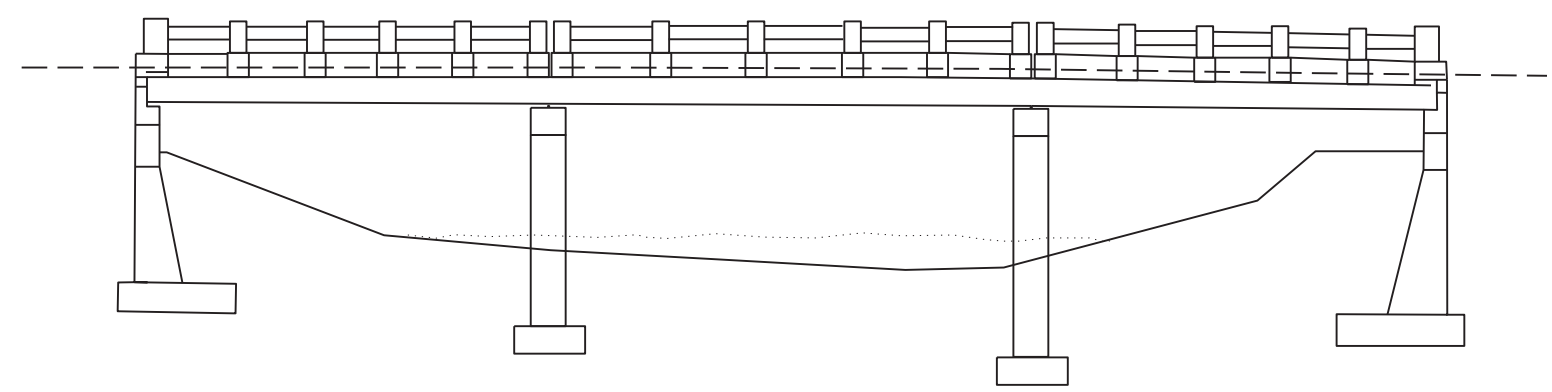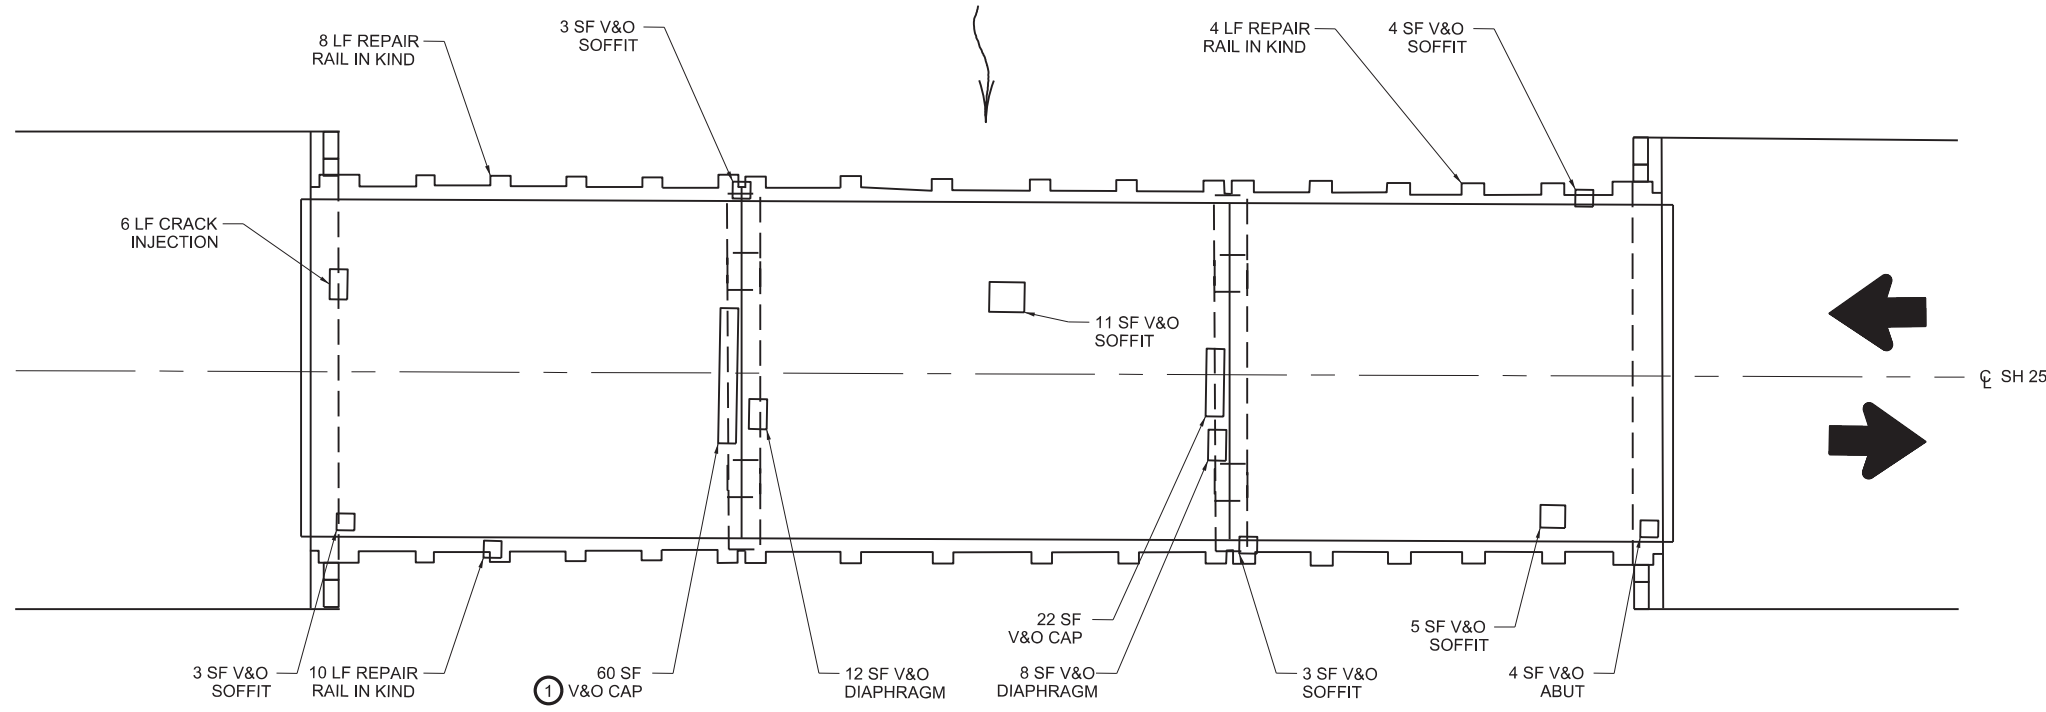


3 - SPAN STEEL I-BEAM (SIMPLE SPAN)

- NOTES:
1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION. CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
 2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

N.T.S.



Andrew Mosley, P.E.

06/20/2024




**REFERENCE #1
BRIDGE LAYOUT**

NBI: 03-005-0137-04-017


**SH 25 AT SOUTH
SIDE IRRIGATION CANAL**

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	554991			

FILE:	DWG:	CK:	DW:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	25		

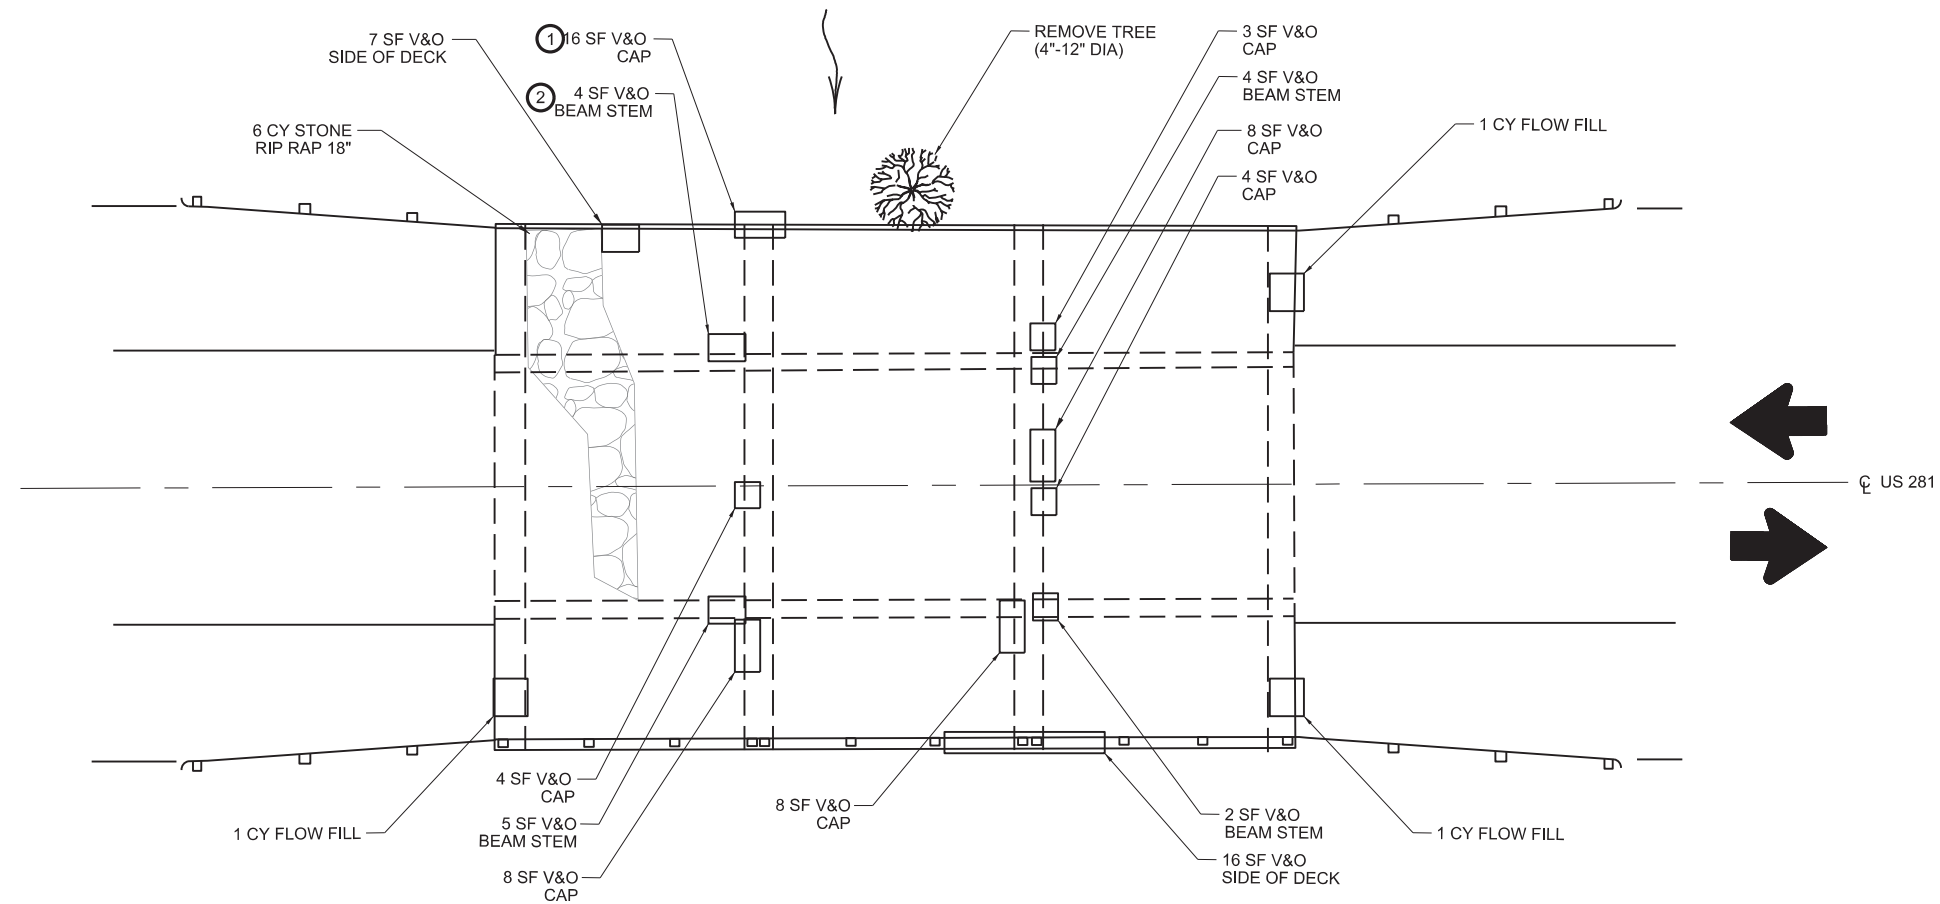


US 281

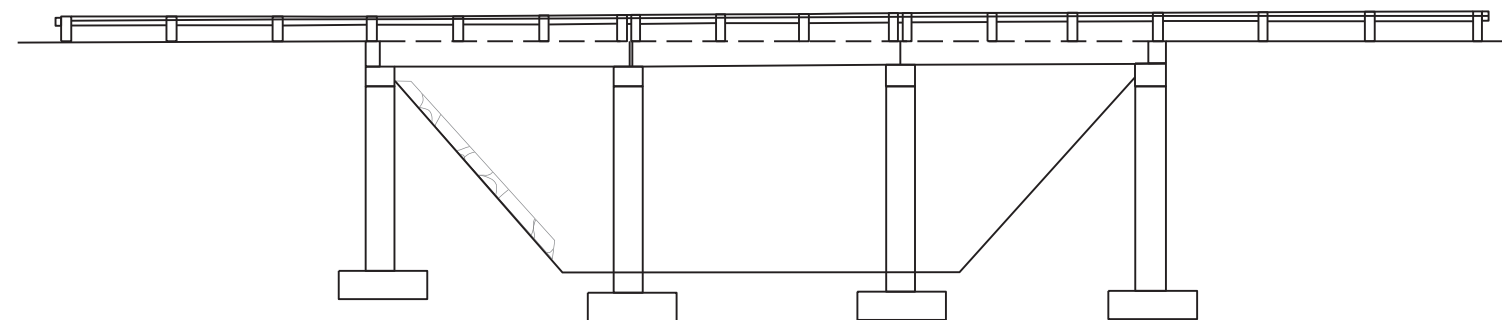

3-SPAN CONC. T-BEAM WIDENED
WITH CONC. FLAT SLABS

N.T.S.



Andrew Mosley, P.E.

06/20/2024



Wichita Falls District

REFERENCE #2
BRIDGE LAYOUT

NBI: 03-005-0249-02-006

US 281 OVER
LAKE CREEK



NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION. CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	553219			
2	553224			

FILE:	DWG:	CK:	DW:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	26		

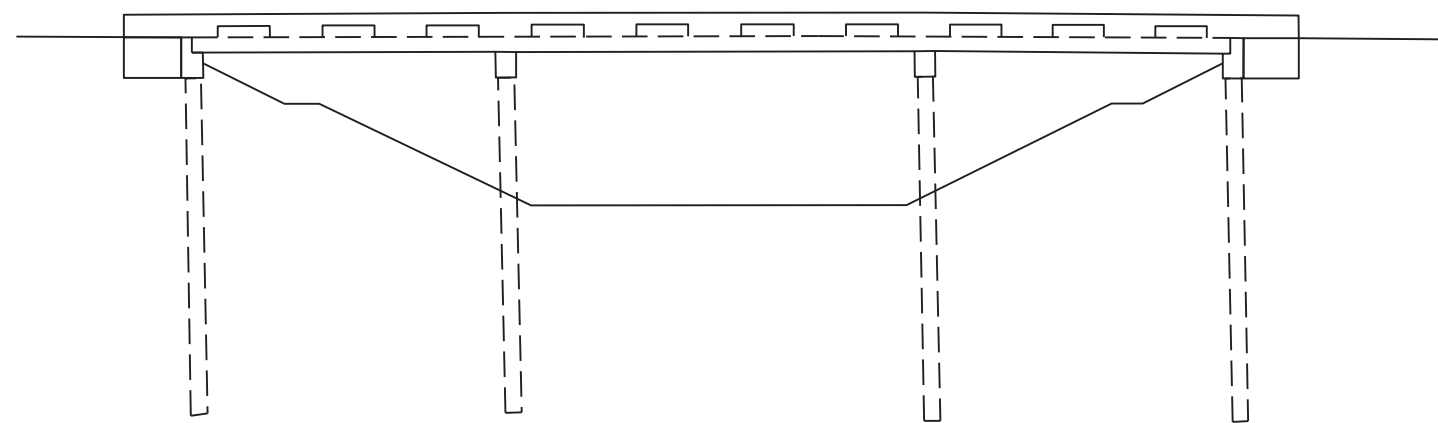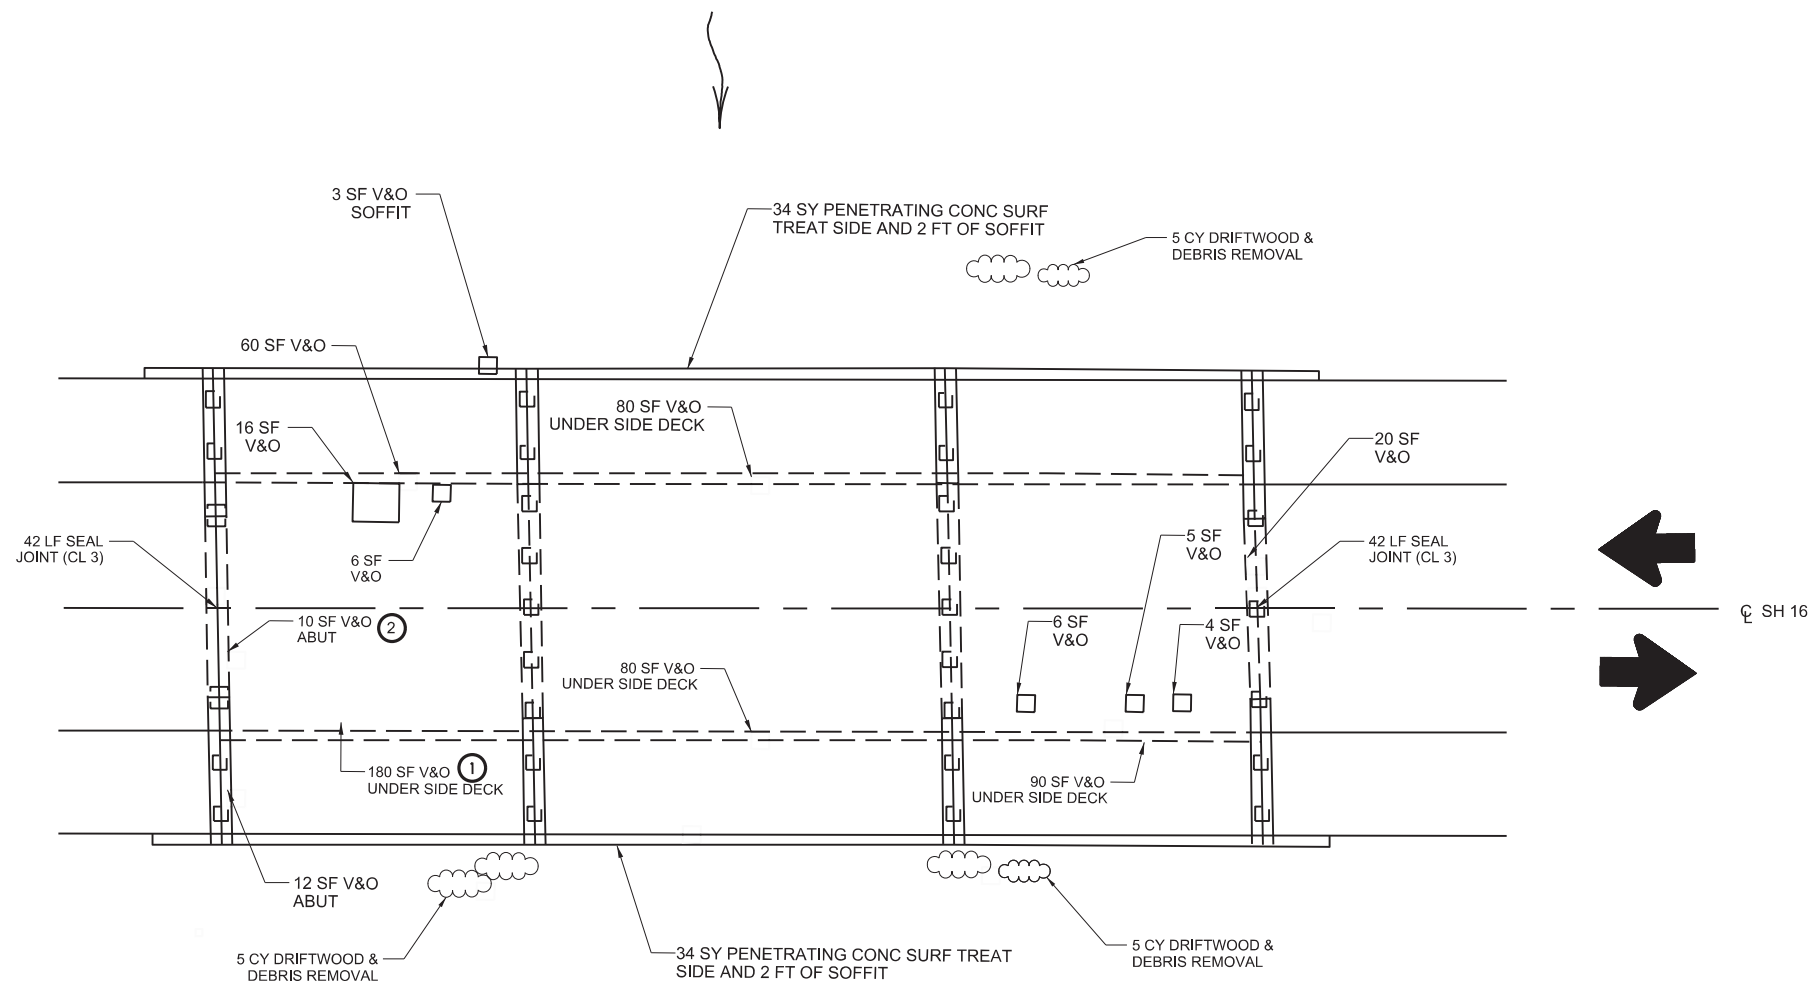


3 - CONTINUOUS SPAN CONC. FLAT SLAB

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

N.T.S.



Andrew Mosley, P.E.

06/20/2024



Wichita Falls District



REFERENCE #3
BRIDGE LAYOUT

NBI: 03-005-0655-02-005

SH 16 OVER
W FRK TRINITY RIVER

		FOR AREA OFFICE USE ONLY		ASSETWISE UPDATED	
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN		
1	552058				
2	707039				

FILE:	DWG:	CK:	DW:	CK:
©TxDOT	JULY 2021	CONTRACT SECT:	JOB:	HIGHWAY:
REVISIONS:	6469	86	001	SH 25, ETC
DIST:	COUNTY:	SHEET NO.:		
WFS	ARCHER, ETC	27		

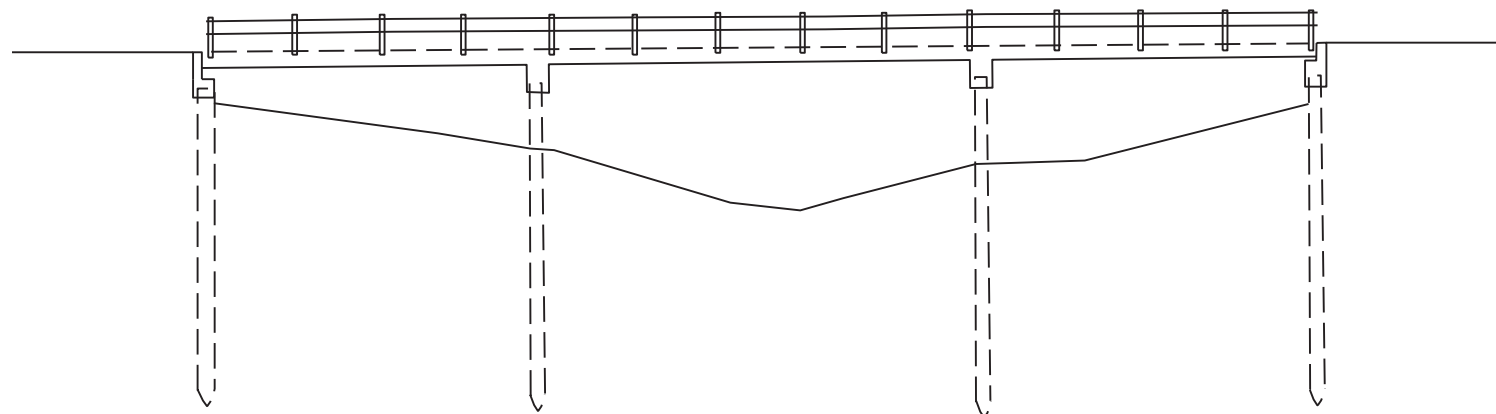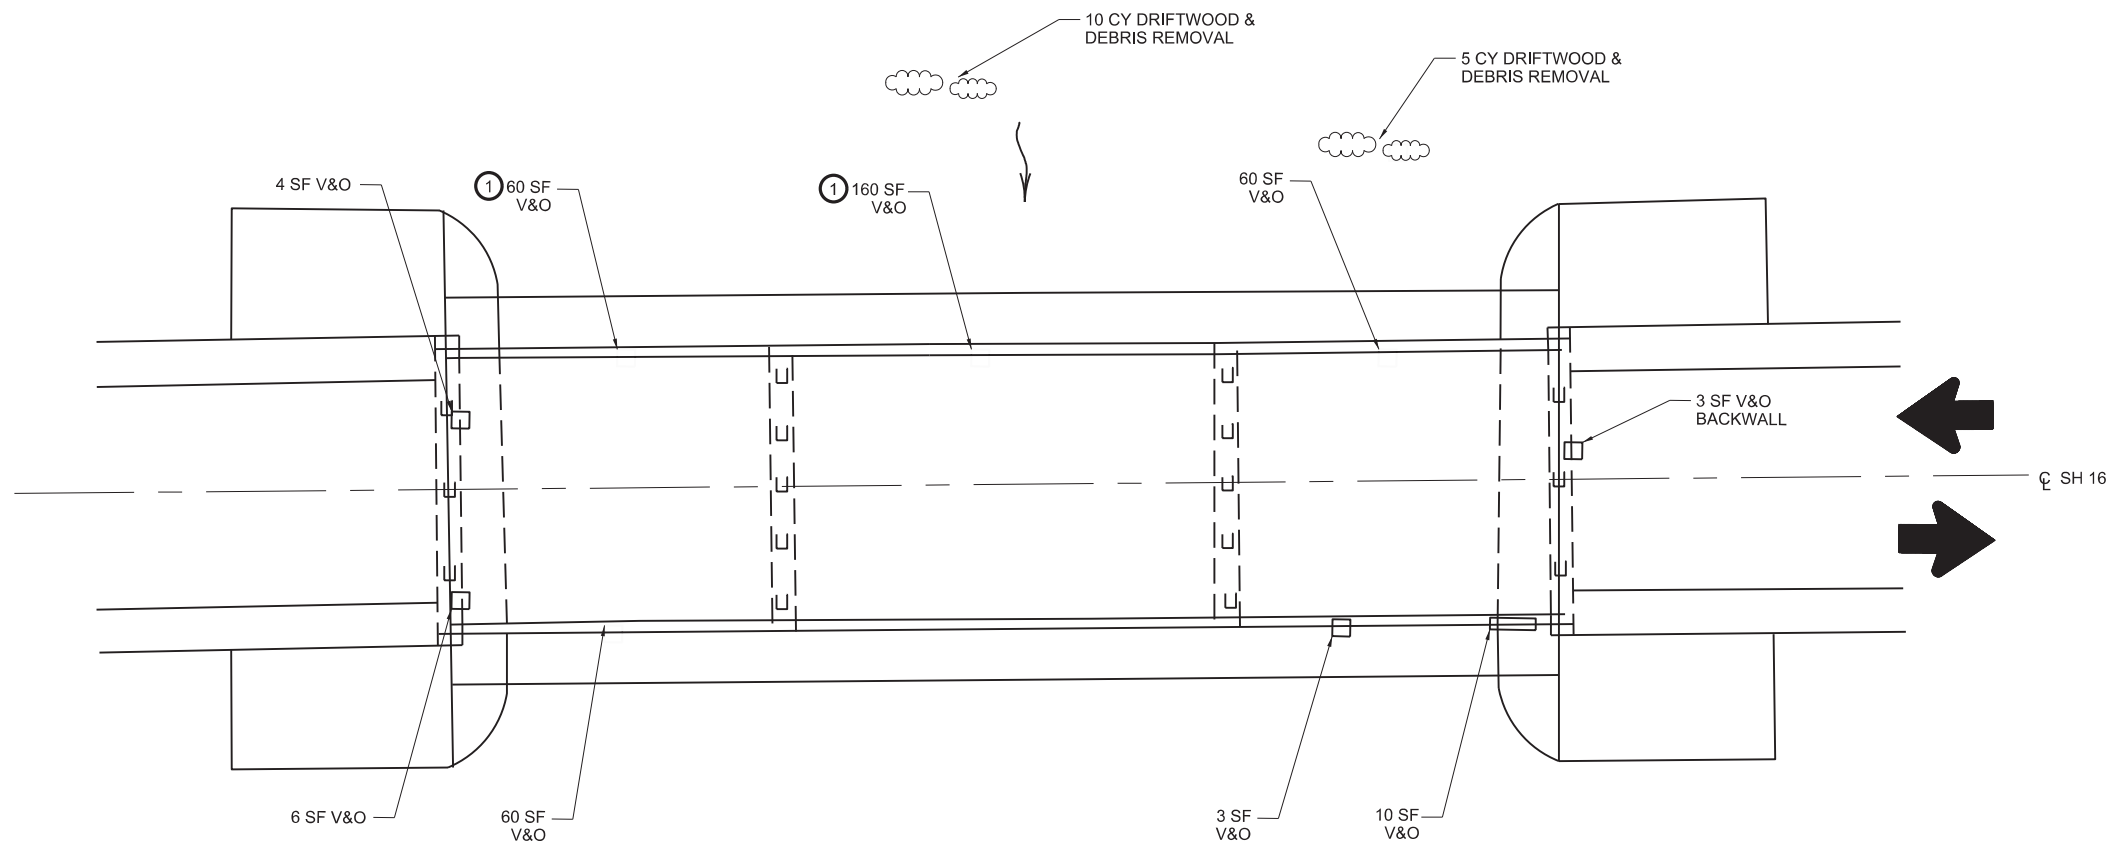

3 - CONTINUOUS SPAN CONC. FLAT SLAB

N.T.S.

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

Andrew Mosley, P.E. 06/20/2024

Wichita Falls District



**REFERENCE #4
BRIDGE LAYOUT**

NBI: 03-005-0655-02-007


**SH 16 OVER
BRUSHY CREEK**

FILE:	DWG:	CHK:	DWG:	CHK:
©TxDOT JULY 2021	CONT:	SECT:	JOB:	HIGHWAY:
REVISIONS	6469	86	001	SH 25, ETC
	DIST:	COUNTY:	SHEET NO.	
	WFS	ARCHER, ETC	28	

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	552034			

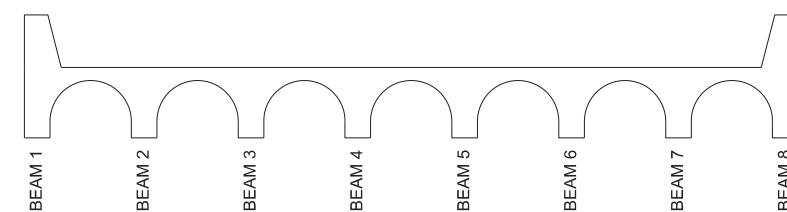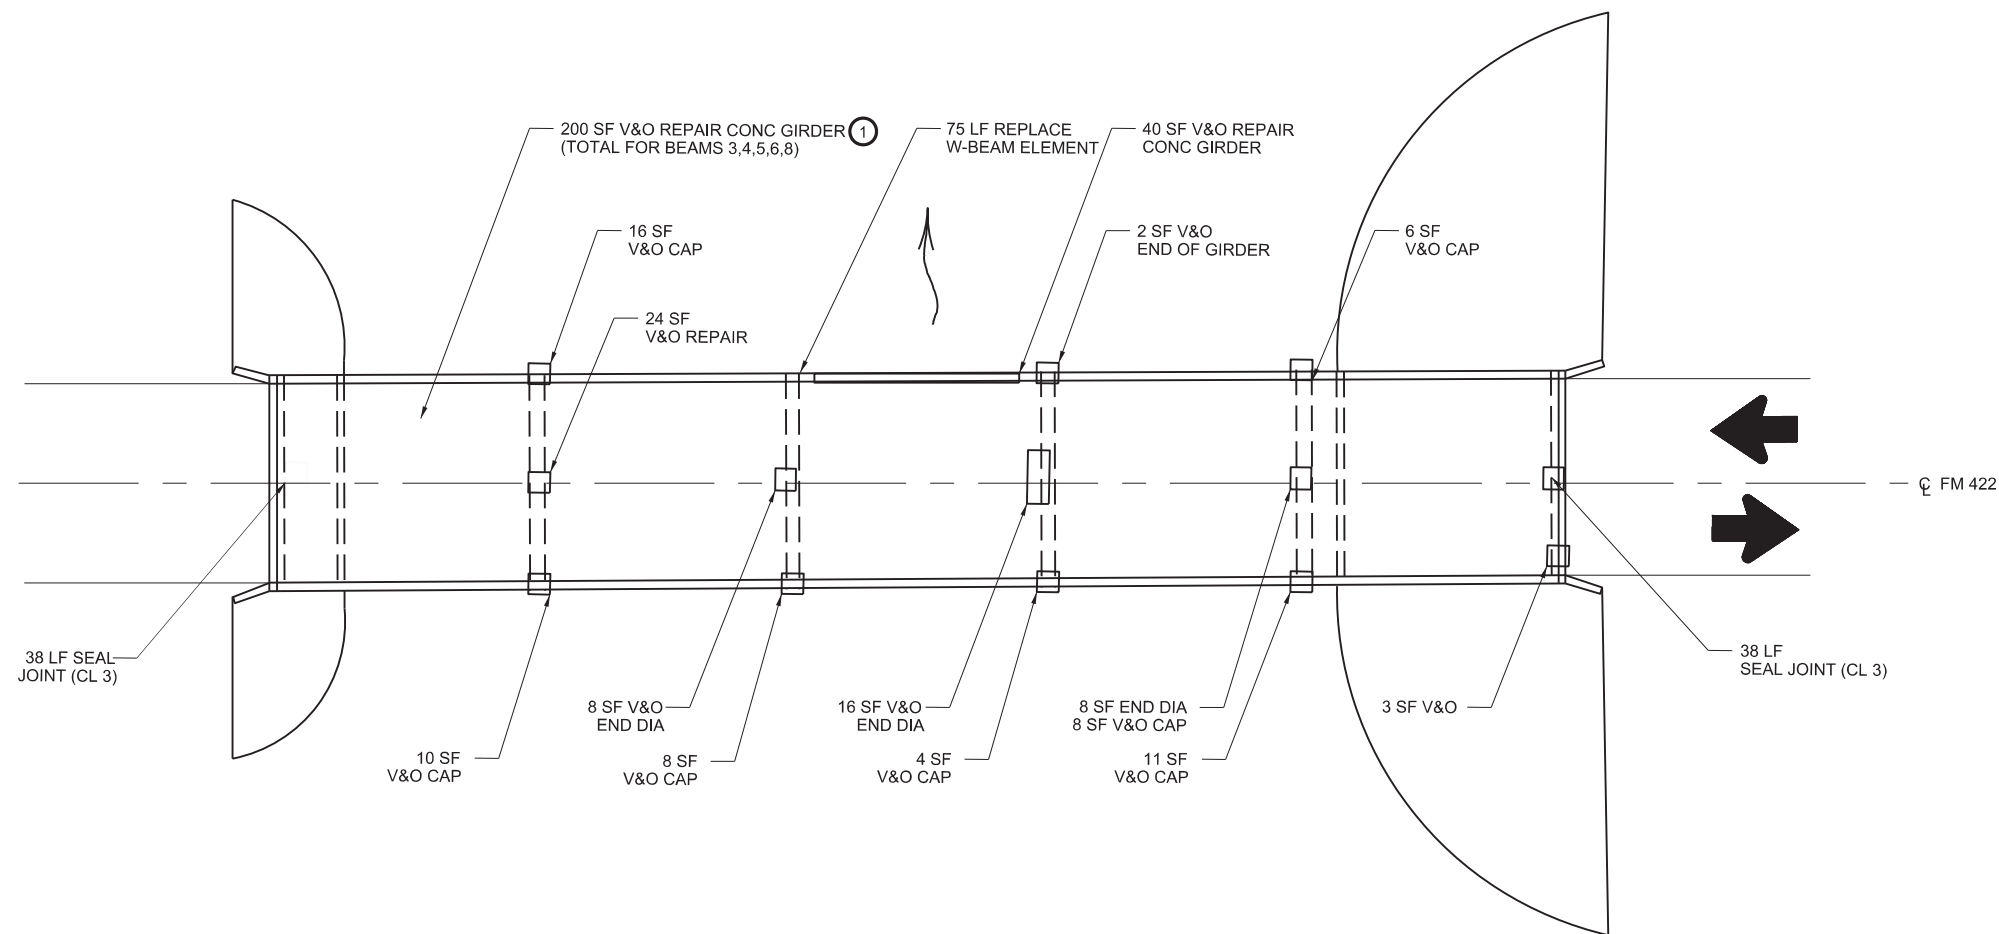

BRIDGE SECTION (LOOKING EAST)

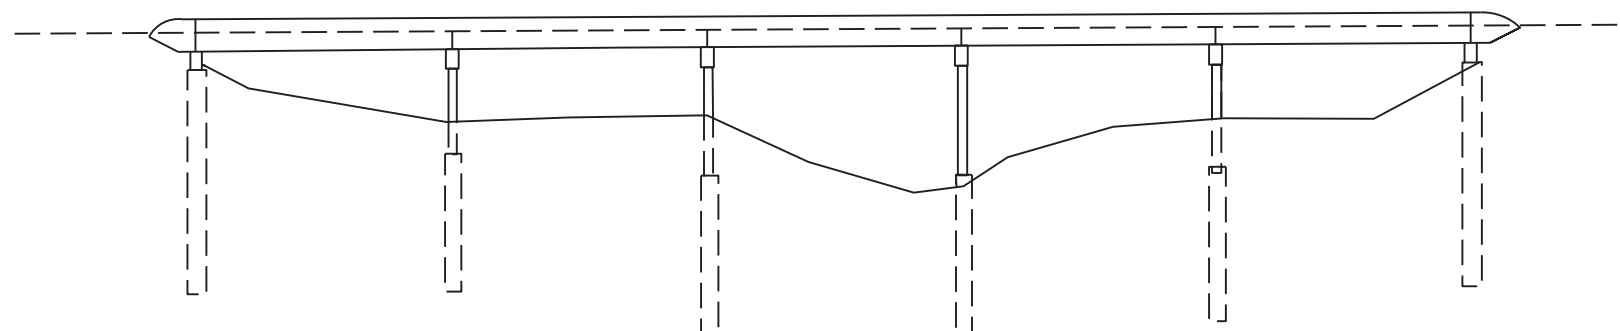


5 - SPAN PAN GIRDER

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

N.T.S.



Andrew Mosley, P.E.

06/20/2024



Wichita Falls District



REFERENCE #5
BRIDGE LAYOUT

NBI: 03-005-0814-02-007

FM 422 OVER
KICKAPOO CREEK

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	551977			

FILE:	DIST:	CK:	DW:	CK:
©TxDOT	JULY 2021	REVISIONS	6469 86	001 SH 25, ETC
	DIST:	COUNTY:	SHEET NO.:	
	WFS	ARCHER, ETC	29	

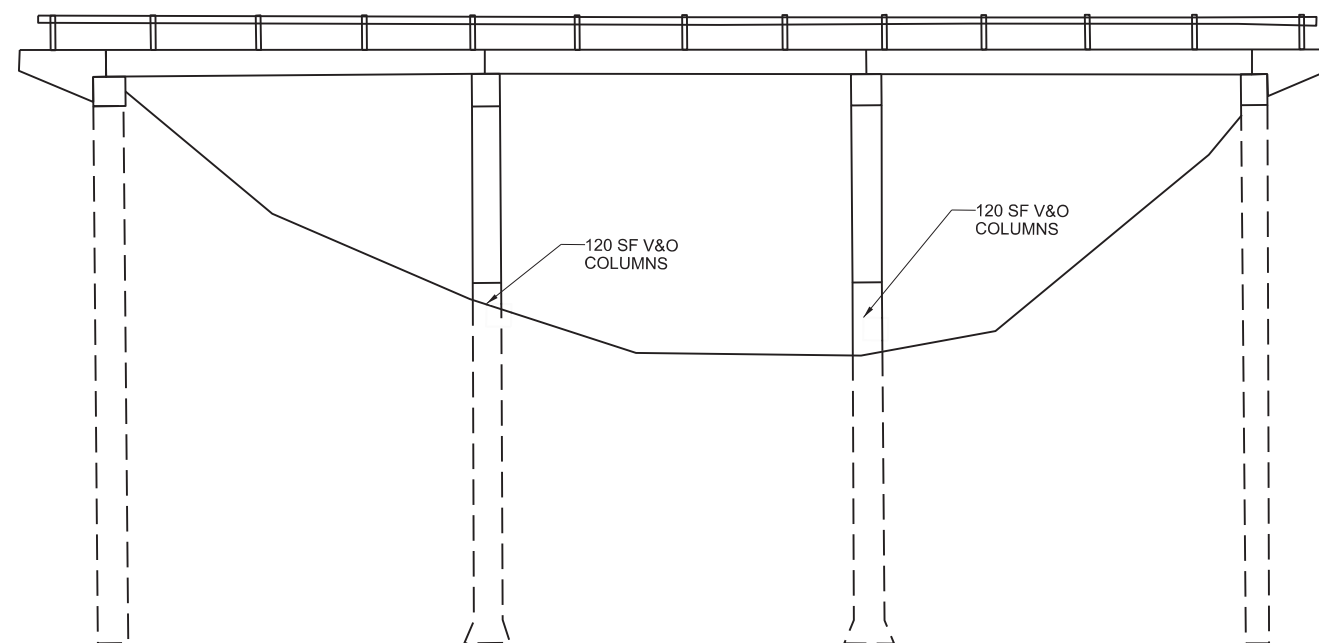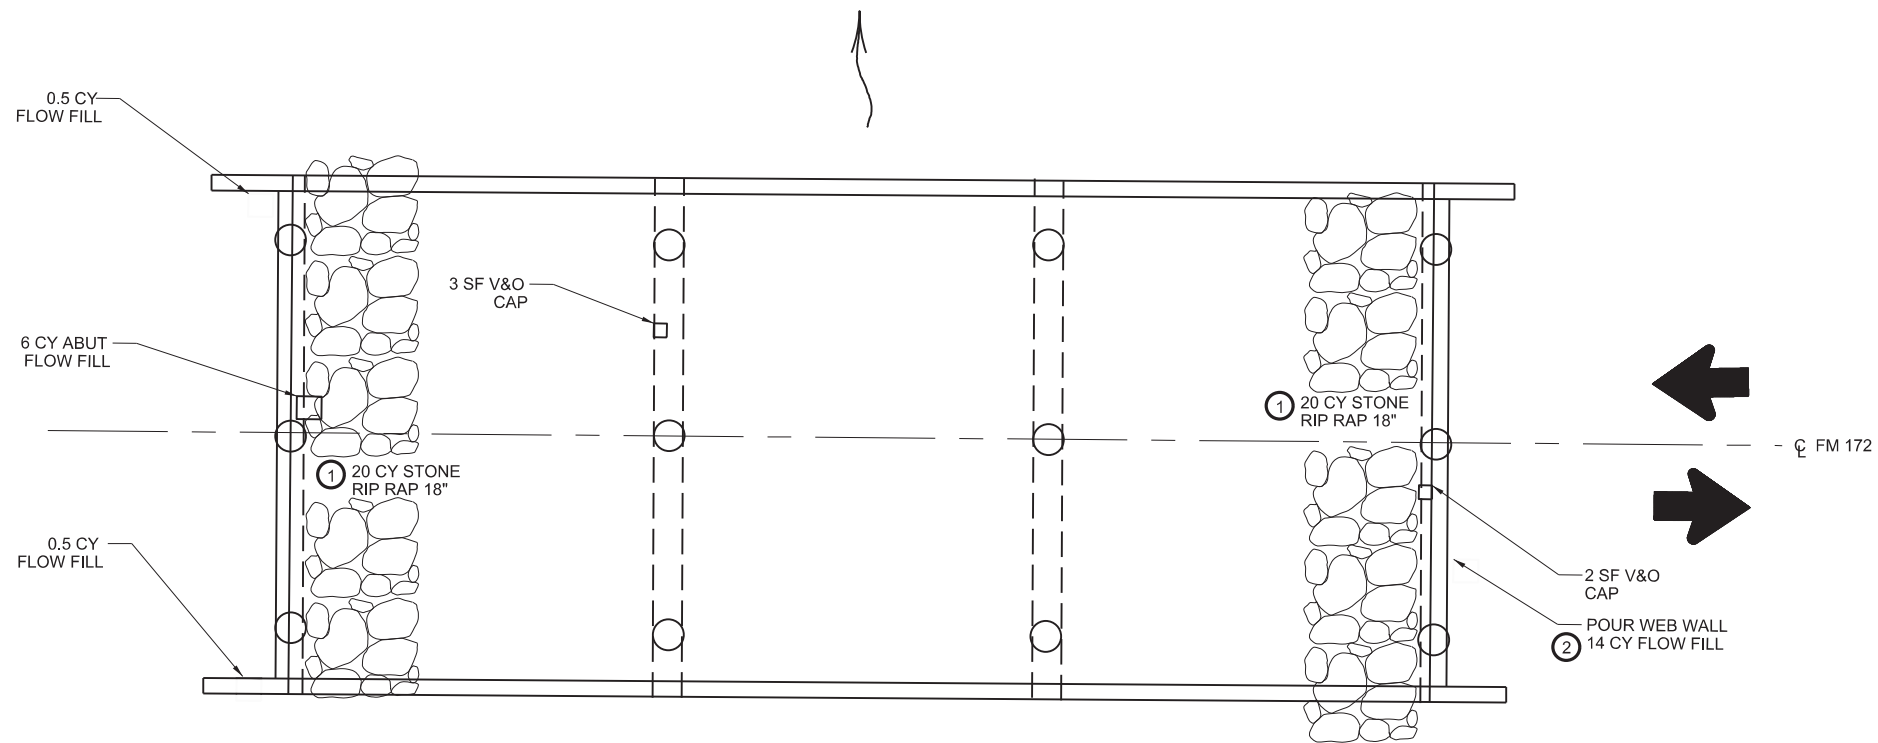

3 - SIMPLE SPAN CONC. FORMED GIRDER

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.
3. THIS LOCATION FEEDS INTO LAKE ARROW HEAD AND HAS SOME WATER MOST OF THE TIME. WATER LEVELS MAY VARY, PLAN WORK ACCORDINGLY.

DATE:
FILE:

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	553500			
2	553514			

N.T.S.

Andrew Mosley, P.E. 06/20/2024




Wichita Falls District

REFERENCE #6 BRIDGE LAYOUT

NBI: 03-005-0824-02-006

FM 172 OVER LITTLE POST OAK CREEK

FILE:	DWG:	CK:	DW:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	30		

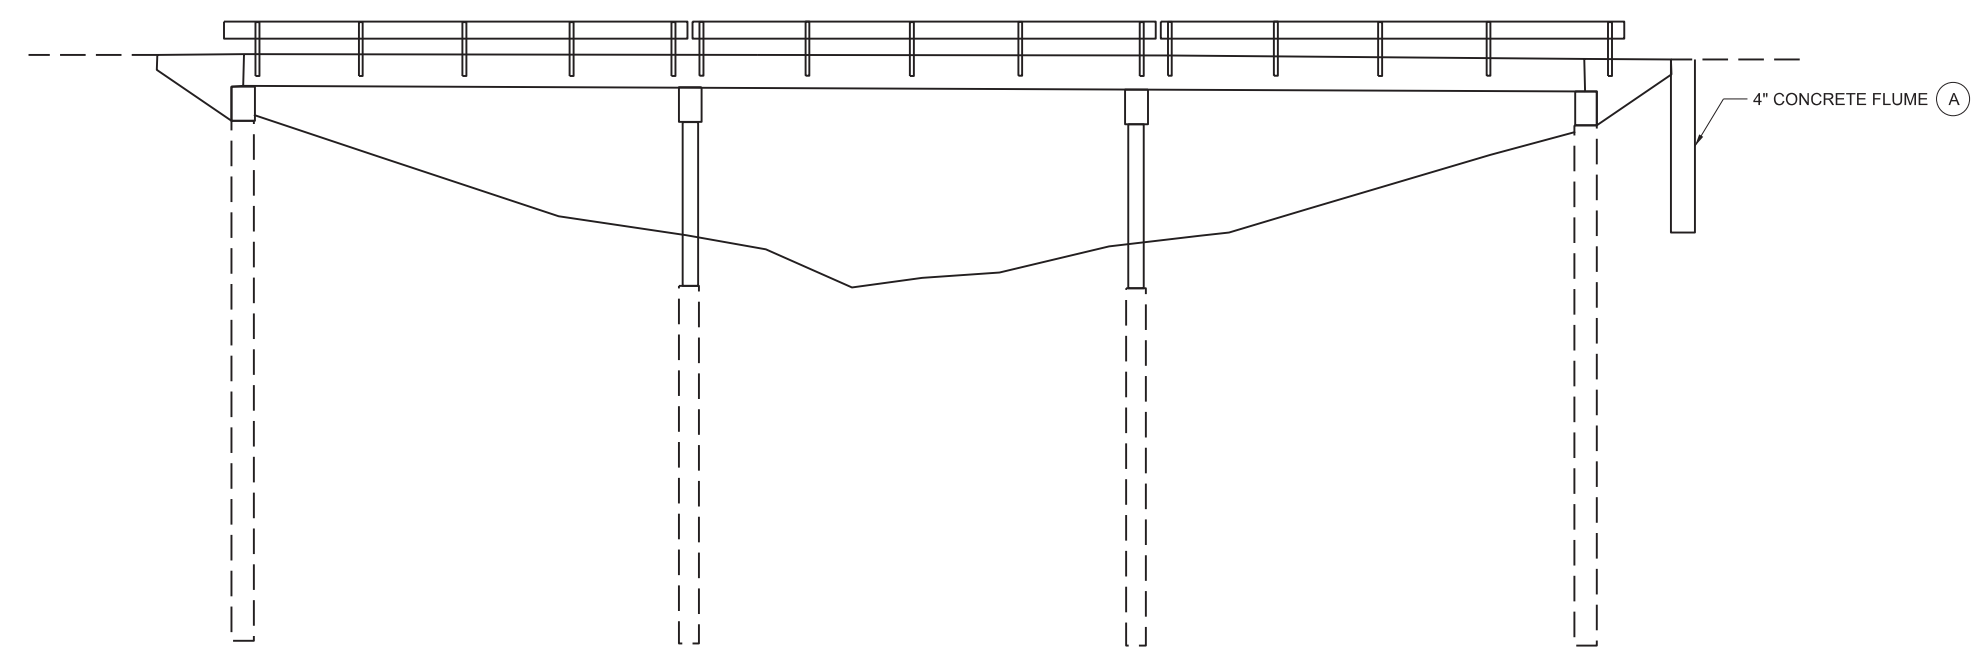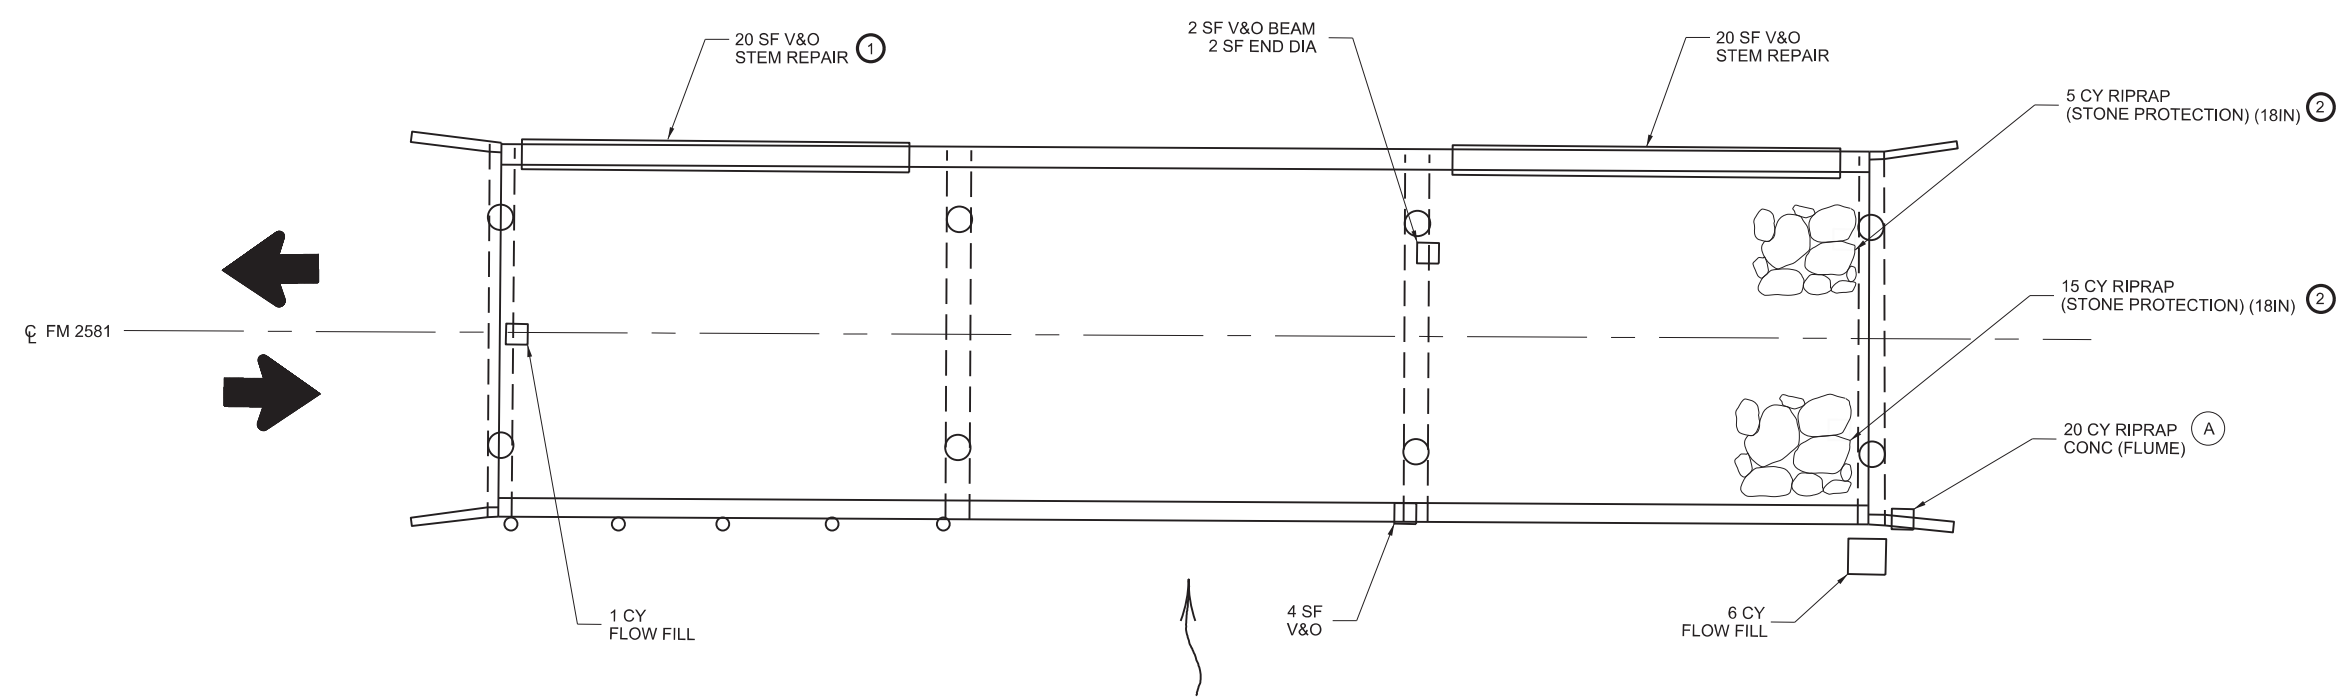

3 - SPAN CONC. PAN GIRDER

N.T.S.

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

(A) VERIFY FLUME LOCATION PRIOR TO SETTING FORMS. REFER TO SD-EBR STANDARD FOR ADDITIONAL INFORMATION.

DATE:
FILE:

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	551379			
2	708106			

Andrew Mosley, P.E. 06/20/2024



Wichita Falls District

REFERENCE #7 BRIDGE LAYOUT

NBI: 03-005-2113-01-003

FM 2581 OVER ONION CREEK

FILE: ©TxDOT	DATE: JULY 2021	DWG: 6469	SECT: 86	JOB: 001	HIGHWAY: SH 25, ETC
REVISIONS		DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.: 31	

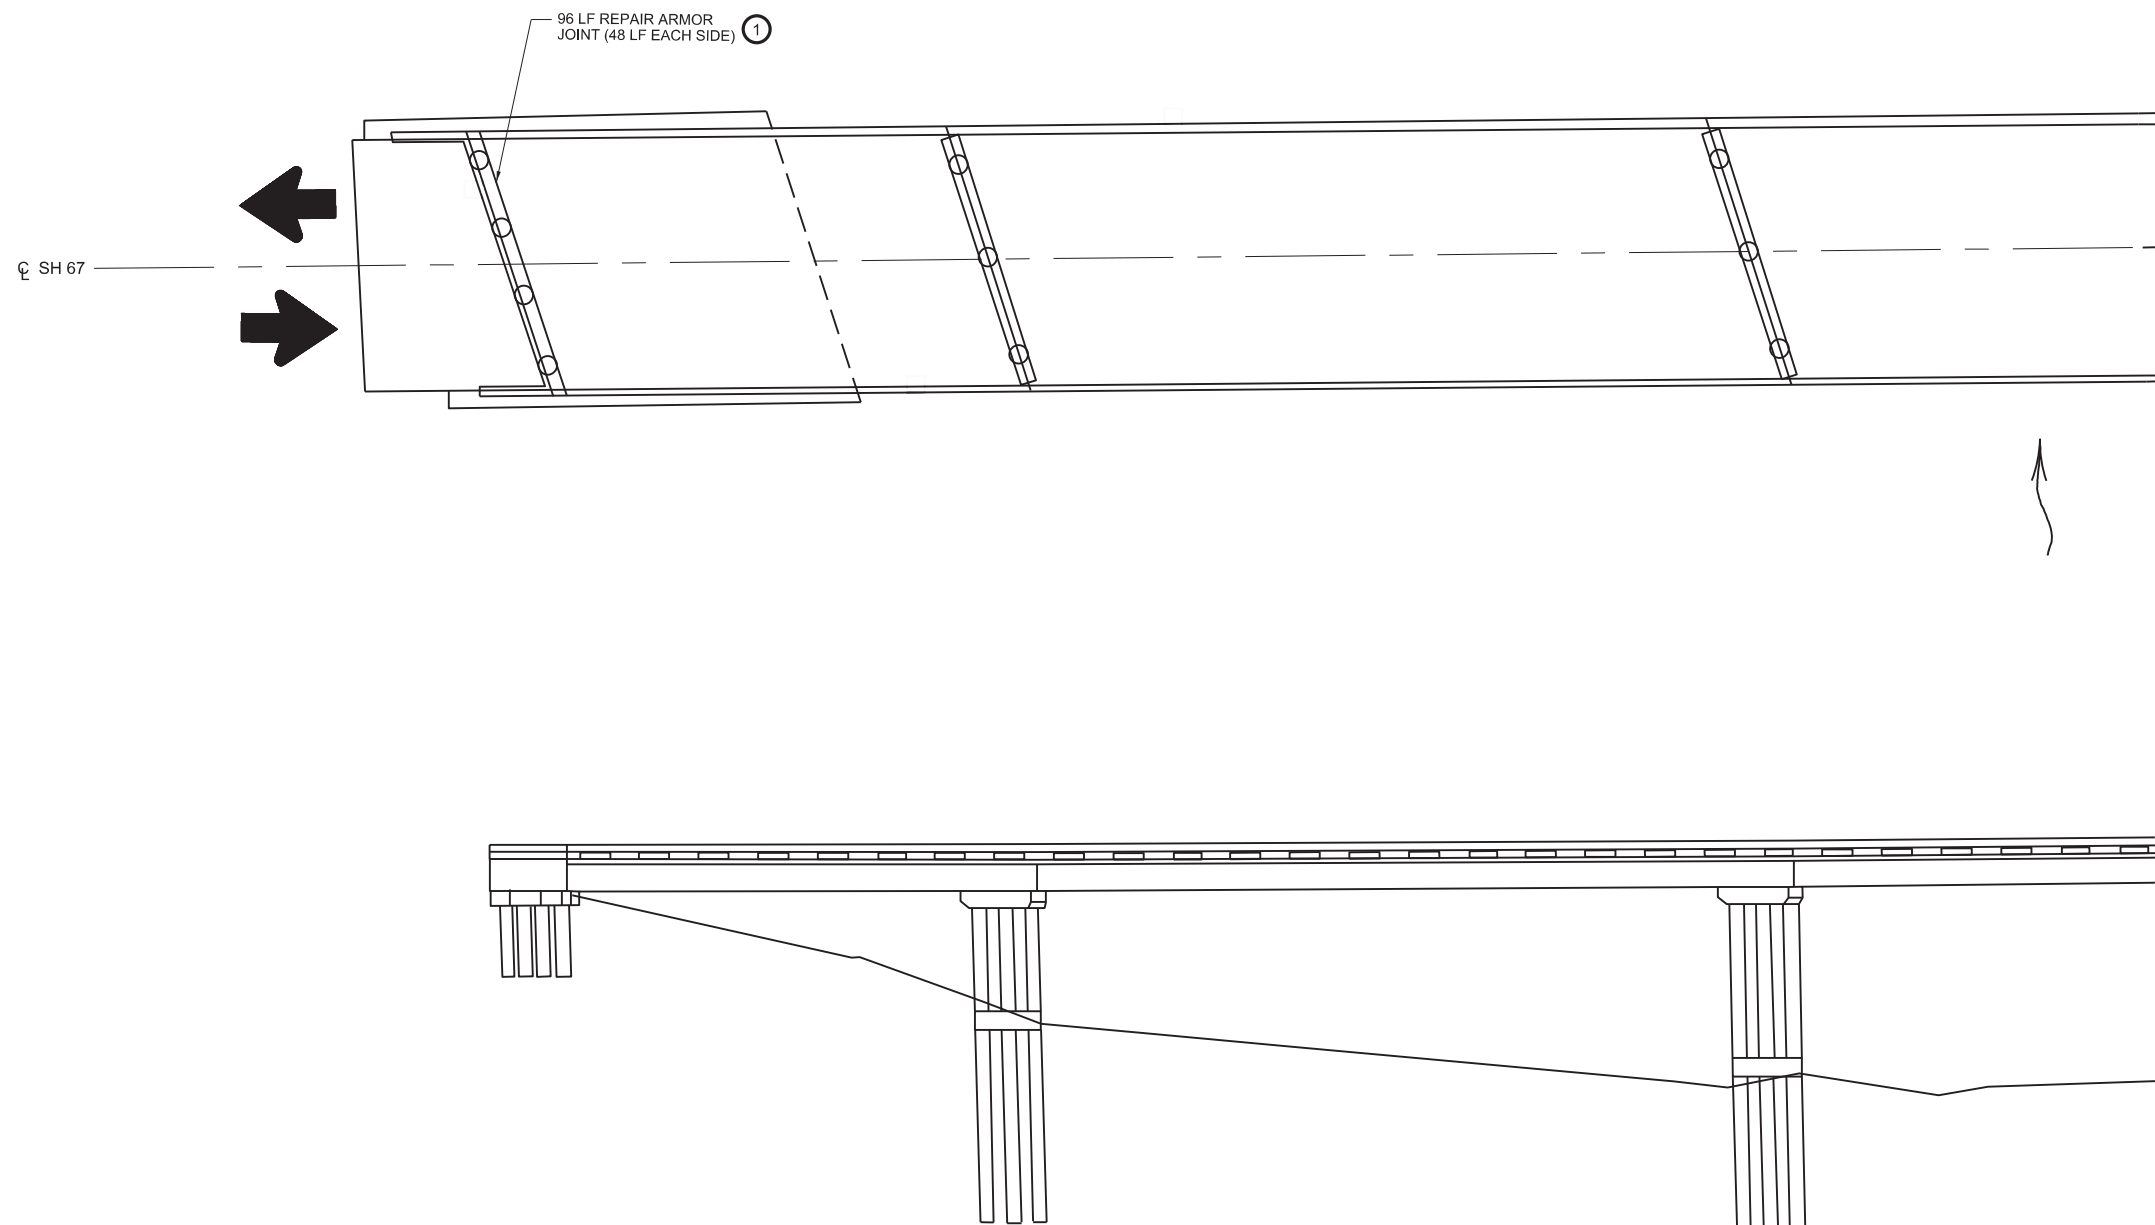

SHEET 1 OF 3

N.T.S.



Andrew Mosley, P.E.

06/20/2024



**REFERENCE #9
BRIDGE LAYOUT**

NBI: 03-252-0256-01-017

**SH 67 OVER
BRAZOS RIVER**



NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	522420			
2	687314			

FILE:	DWG:	CK:	DWG:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	33		

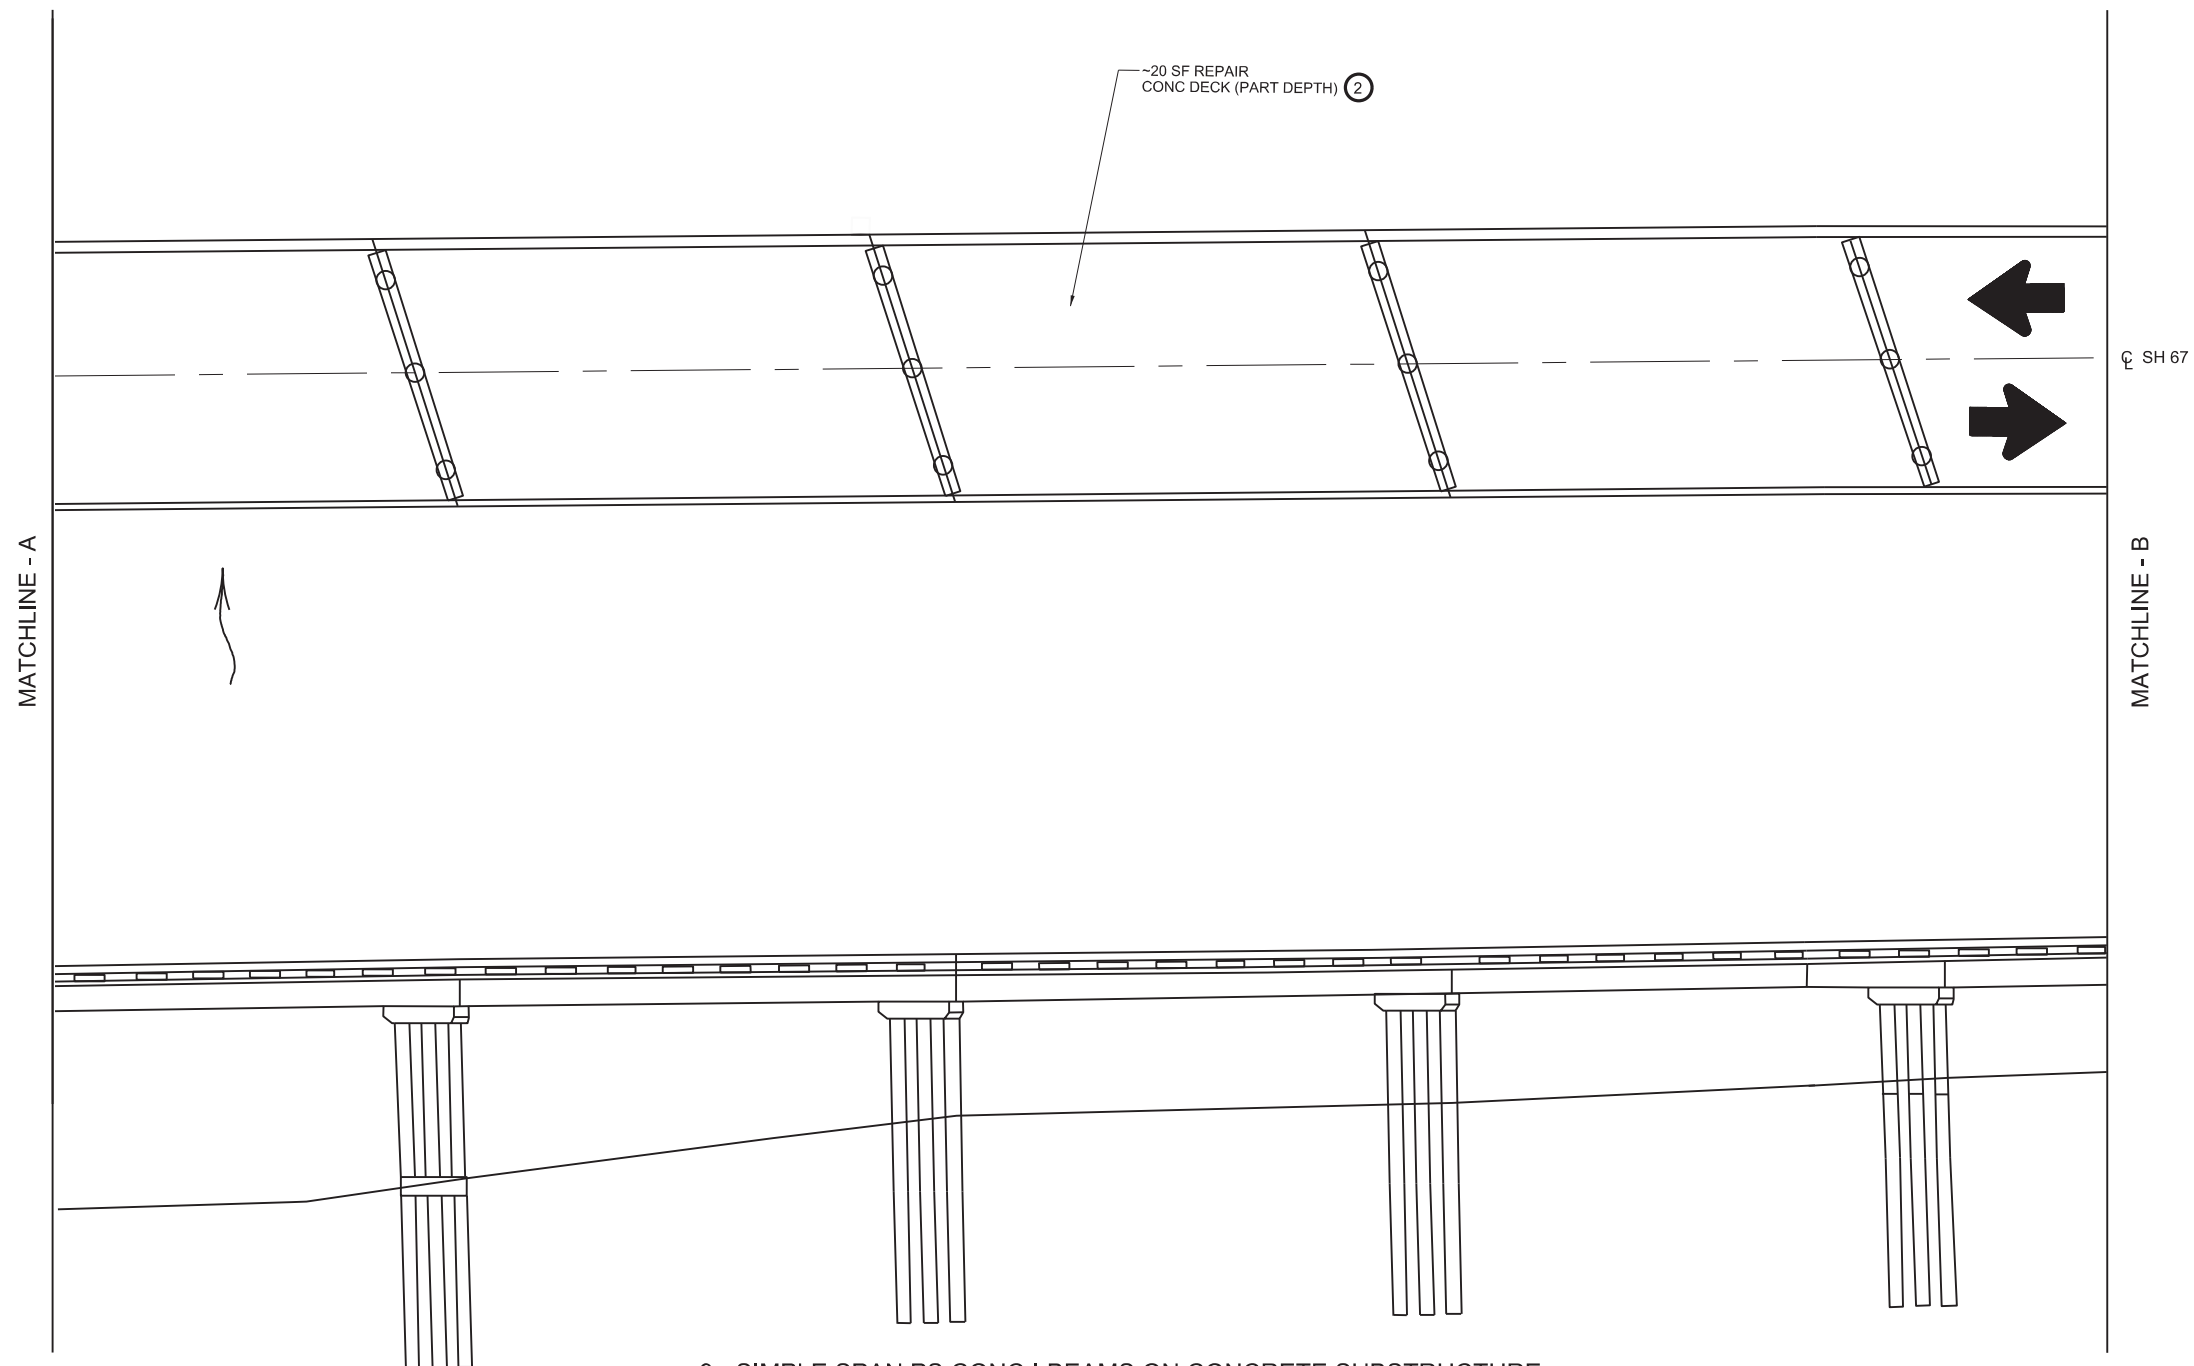

~20 SF REPAIR CONC DECK (PART DEPTH) ②

SH 67

MATCHLINE - A

MATCHLINE - B

9 - SIMPLE SPAN PS CONC I-BEAMS ON CONCRETE SUBSTRUCTURE

SHEET 2 OF 3

N.T.S.



Andrew Mosley, P.E.

06/20/2024



**REFERENCE #9
BRIDGE LAYOUT**

NBI: 03-252-0256-01-017

**SH 67 OVER
BRAZOS RIVER**




NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
①	522420			
②	687314			

FILE:	DWG:	CK:	DWG:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST:	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	34		

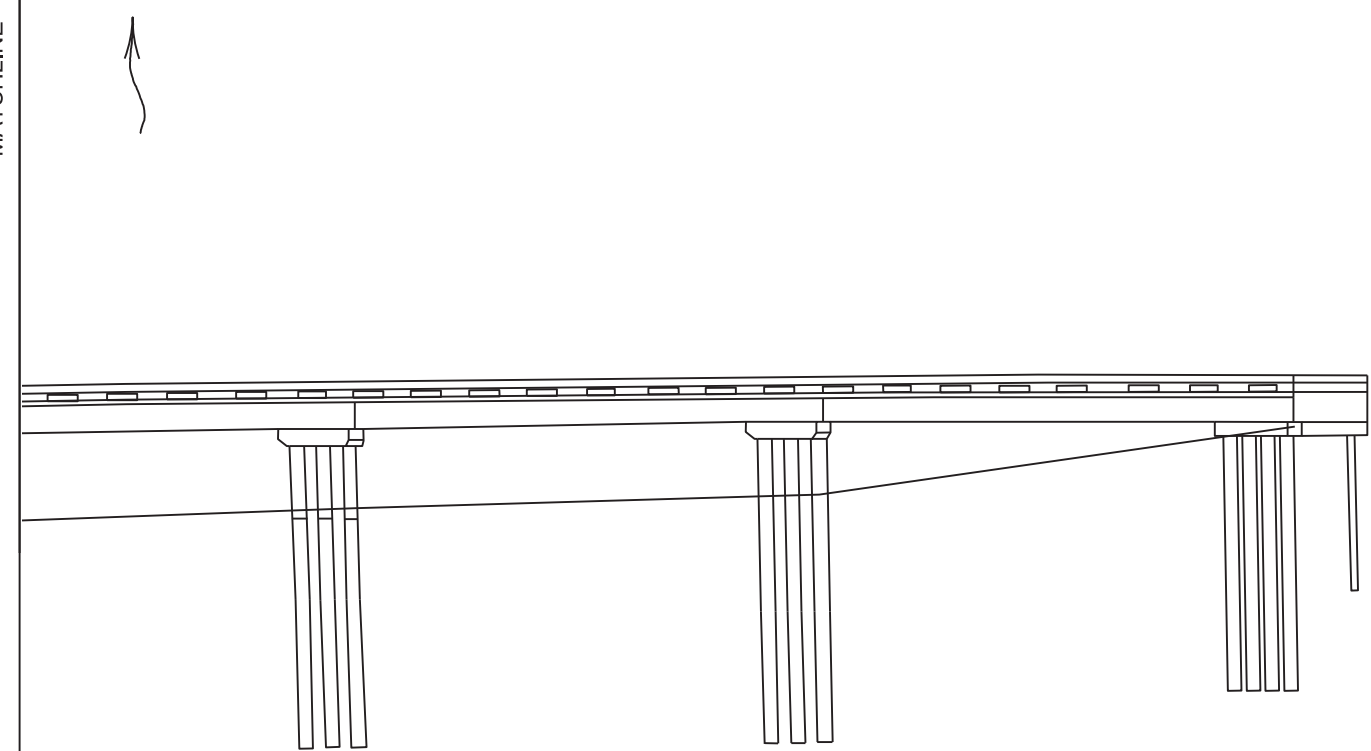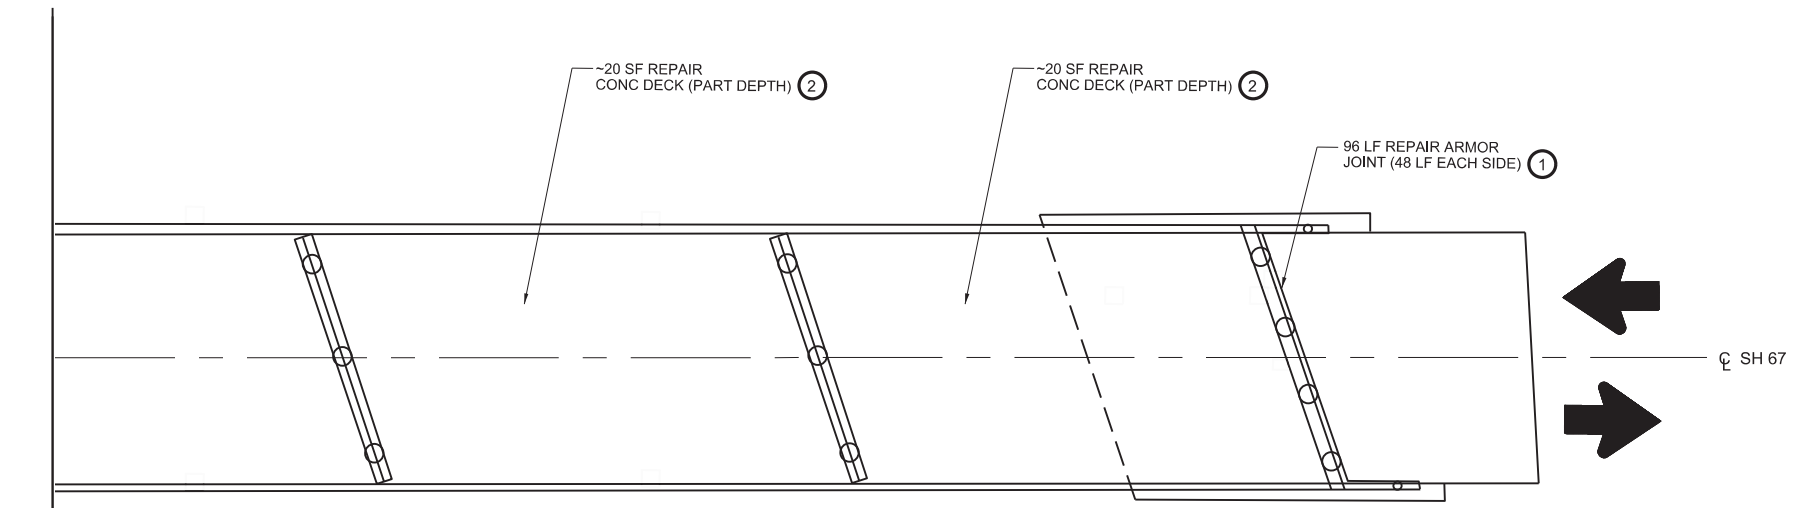

9 - SIMPLE SPAN PS CONC I-BEAMS ON CONCRETE SUBSTRUCTURE

- NOTES:
1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
 2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

SHEET 3 OF 3

N.T.S.



Andrew Mosley, P.E.

06/20/2024






**REFERENCE #9
BRIDGE LAYOUT**

NBI: 03-252-0256-01-017

**SH 67 OVER
BRAZOS RIVER**

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	522420			
2	687314			

FILE:	DWG:	CK:	DWG:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	35		

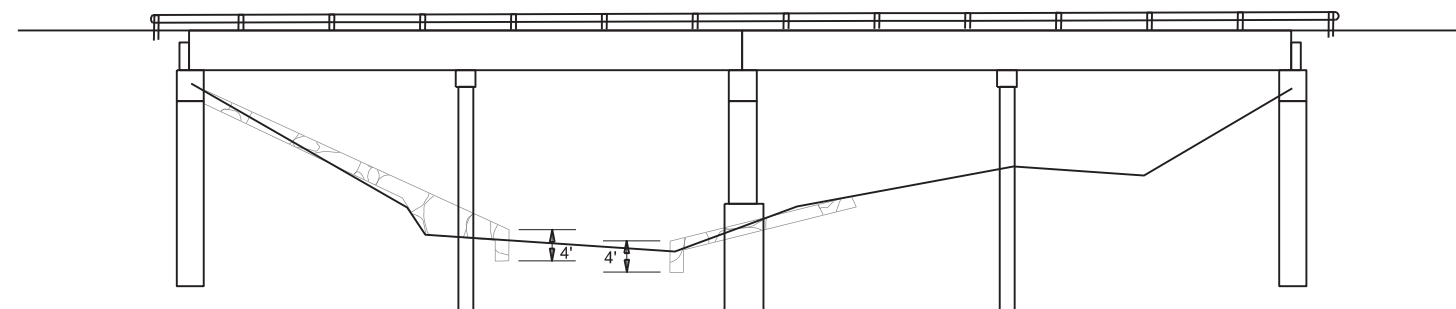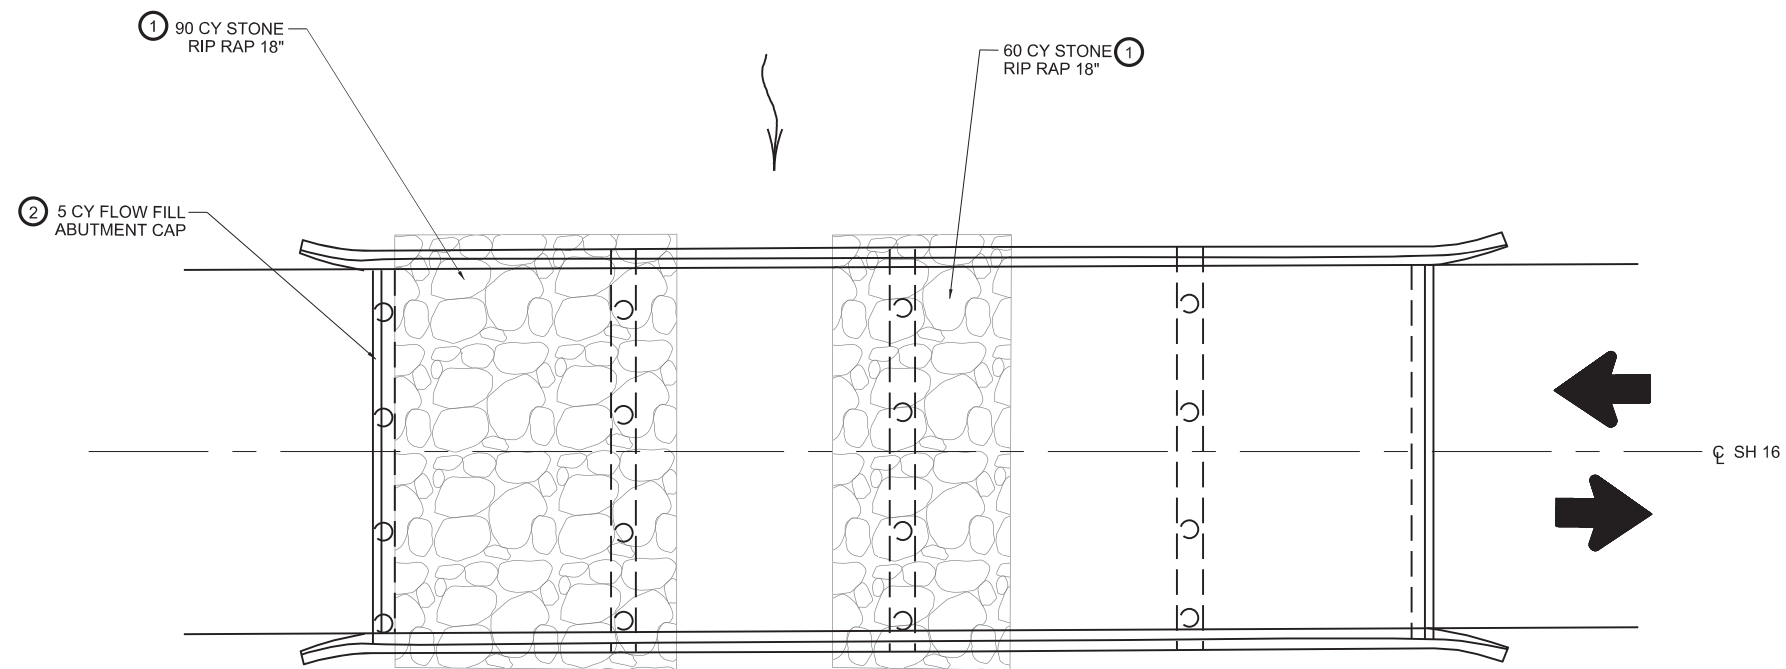

4 - SPAN CONTINUOUS CONCRETE SLAB BRIDGE ON CONCRETE BENTS

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	522670			
2	687757			

N.T.S.

Andrew Mosley, P.E.

06/20/2024



Wichita Falls District

**REFERENCE #10
BRIDGE LAYOUT**

NBI: 03-252-0362-01-018

**SH 16 OVER
FLAT ROCK CREEK**

FILE:	DWG:	CK:	DW:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	36		

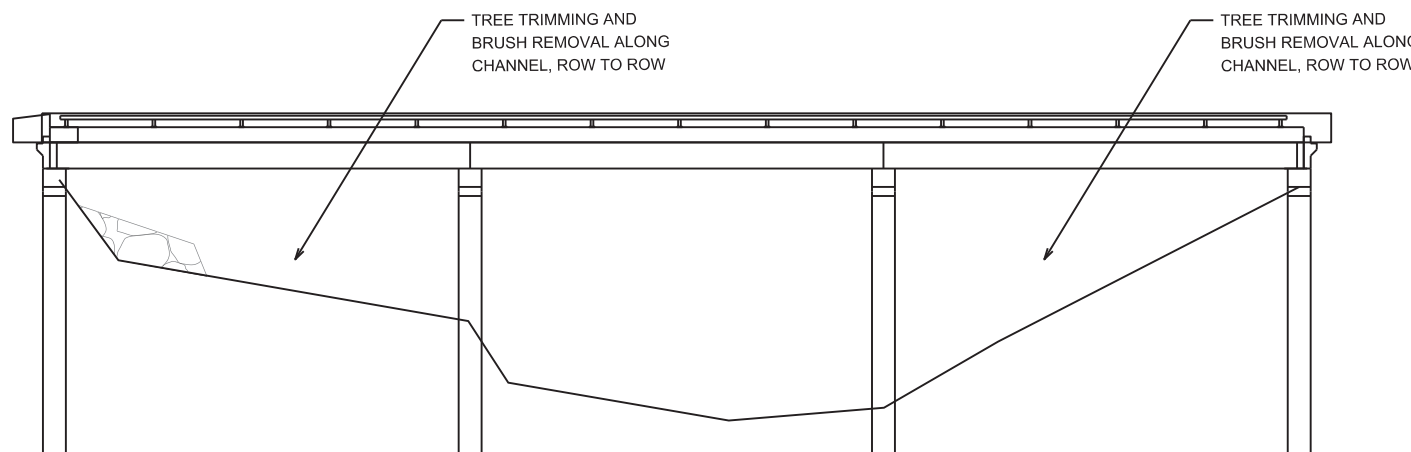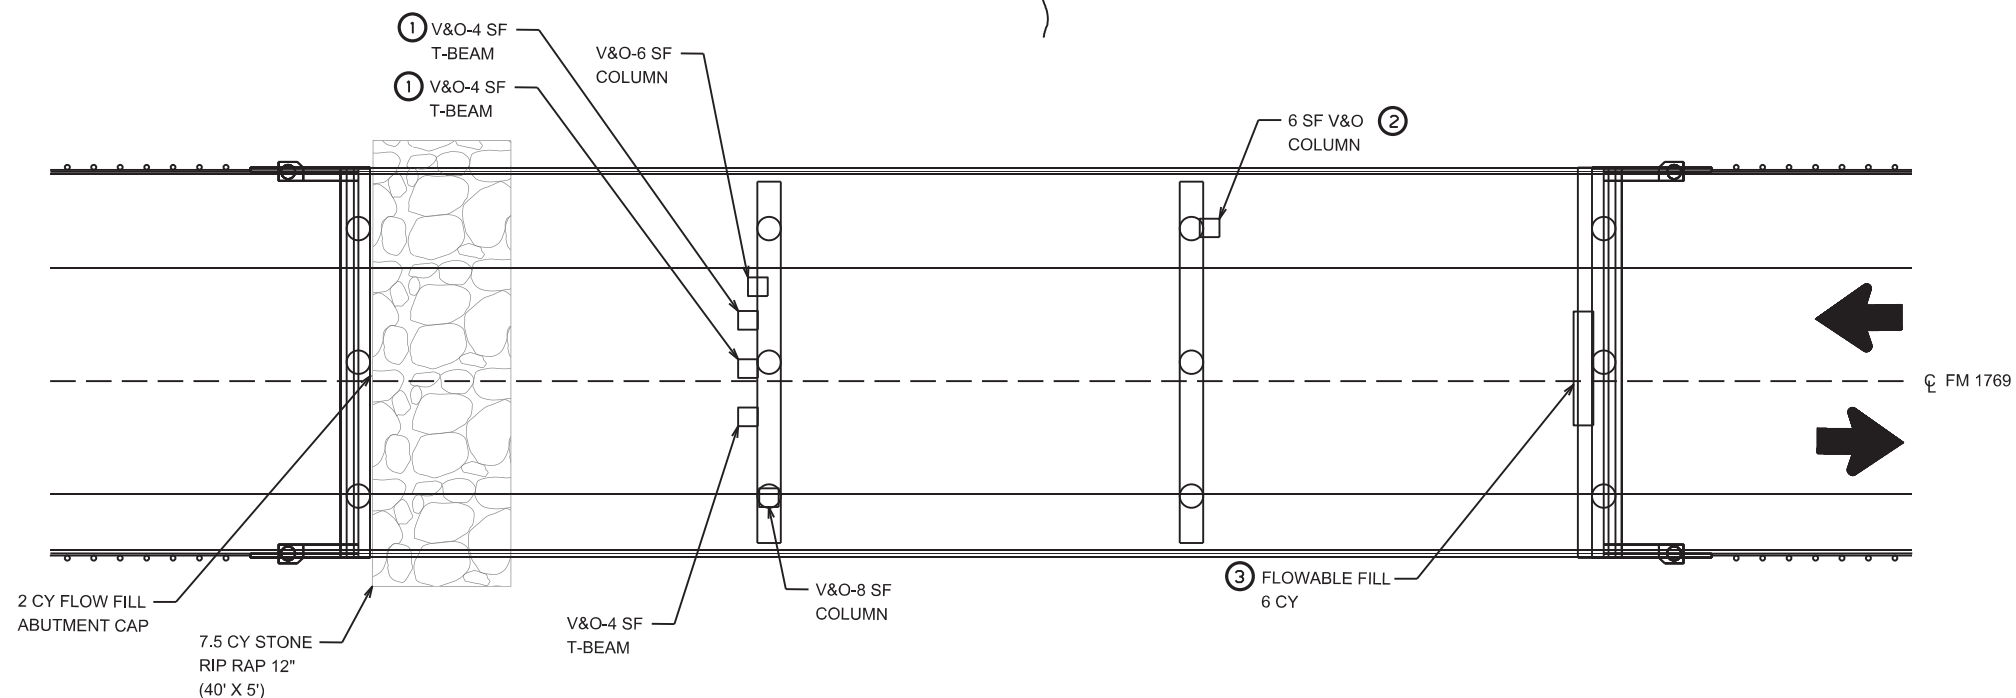

3 - SIMPLE SPAN CONCRETE T-BEAM BRIDGE ON CONC SUPPORTS

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION. CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	531134			
2	531136			
3	688032			

N.T.S.

Andrew Mosley, P.E. 06/20/2024



Wichita Falls District

**REFERENCE # 11
BRIDGE LAYOUT**

NBI: 03-169-1711-01-002

**FM 1769 OVER
FORK OF OAK CREEK**

FILE:	DWG:	CK:	DW:	CK:
©TxDOT JULY 2021	CONT:	SECT:	JOB:	HIGHWAY:
REVISIONS	6469	86	001	SH 25, ETC
DIST:	COUNTY:	SHEET NO.:		
WFS	ARCHER, ETC			37

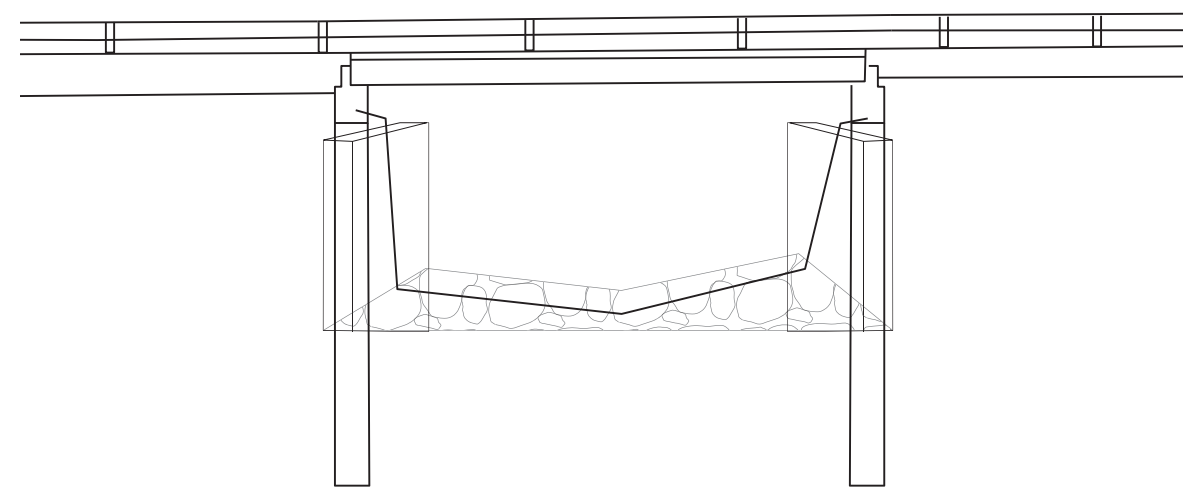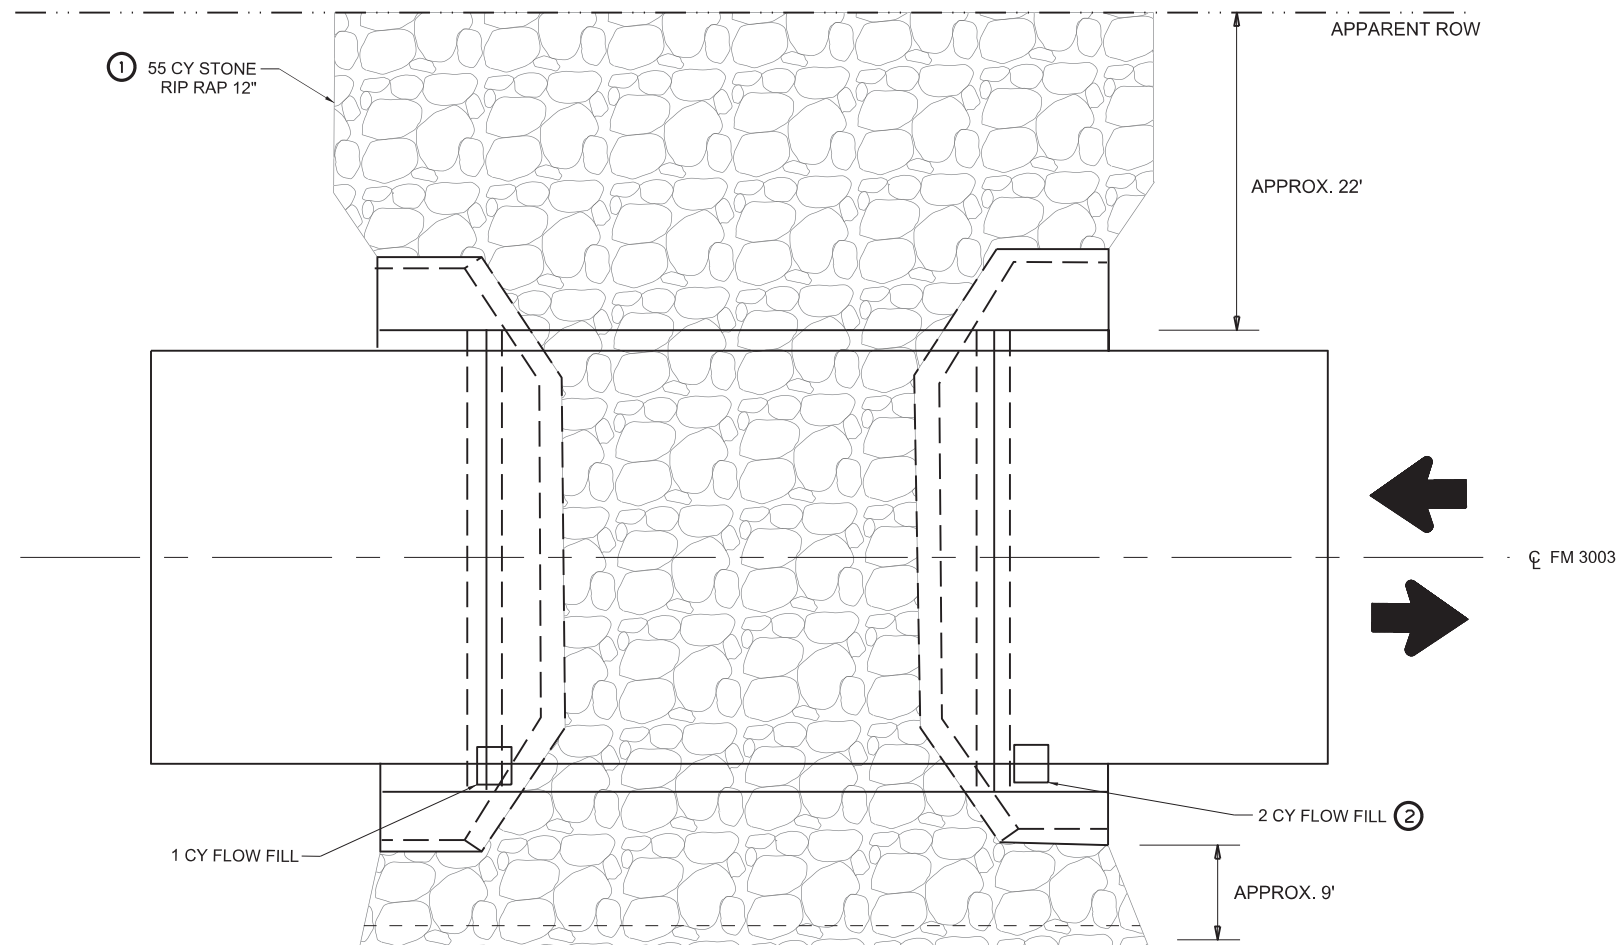


Single span concrete pan girder bridge

NOTES:

1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

N.T.S.



Andrew Mosley, P.E.

06/20/2024



Wichita Falls District



REFERENCE # 12
BRIDGE LAYOUT

NBI: 03-252-3018-01-001

FM 3003 AT
DRAW

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
①	530792			
②	688111			

FILE:	DWG:	CHK:	DWG:	CHK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	38		

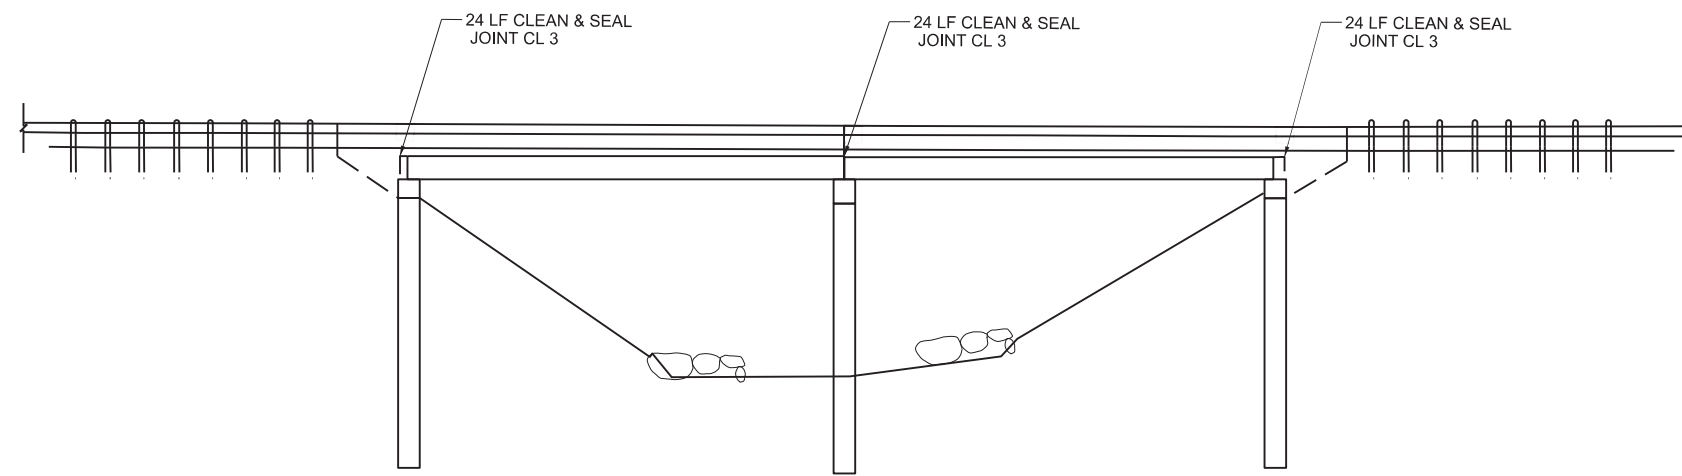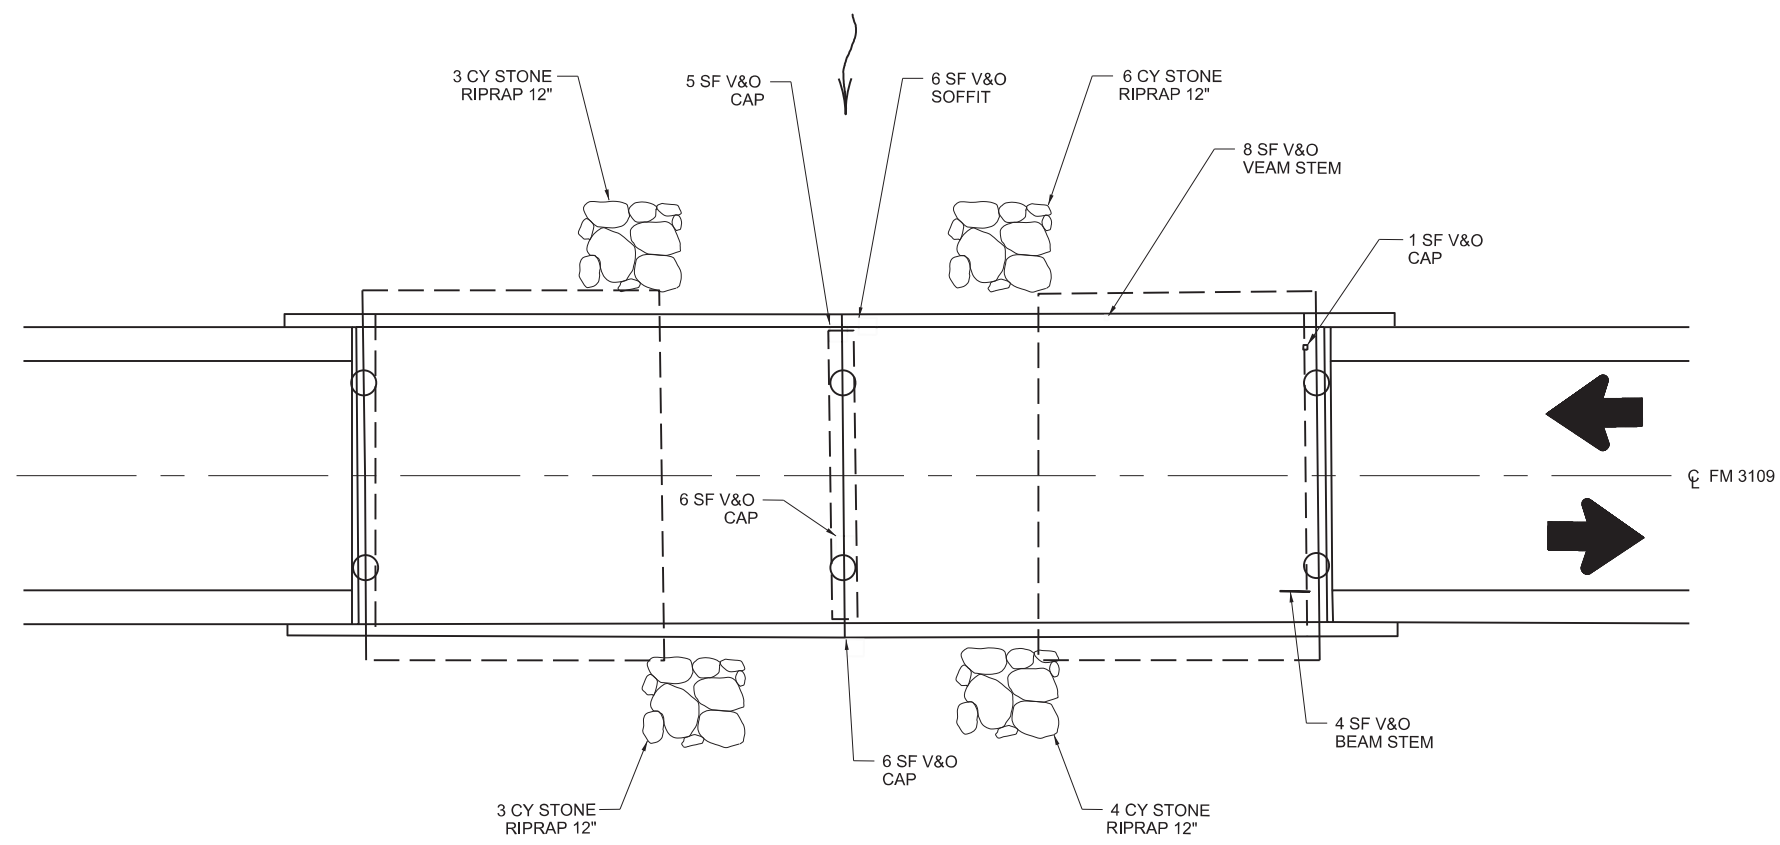

2 SIMPLE SPAN CONCRETE PAN GIRDER BRIDGE

N.T.S.

- NOTES:
1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION, CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
 2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

Andrew Mosley, P.E. 06/20/2024

Wichita Falls District



**REFERENCE # 13
BRIDGE LAYOUT**

NBI: 03-252-3149-02-002

FM 3109 OVER
FISH CREEK

FILE: ©TxDOT		DWG: JULY 2021	CONTRACT: 6469	SECTION: 86	JOB: 001	HIGHWAY: SH 25, ETC
REVISIONS						
DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.: 39				

FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	521979			

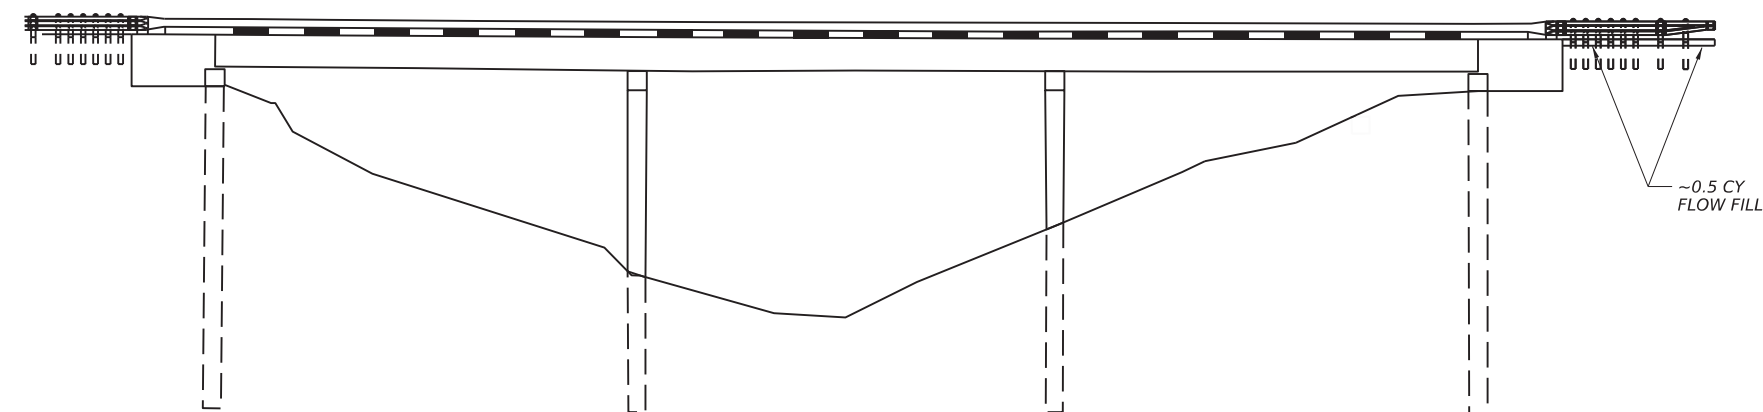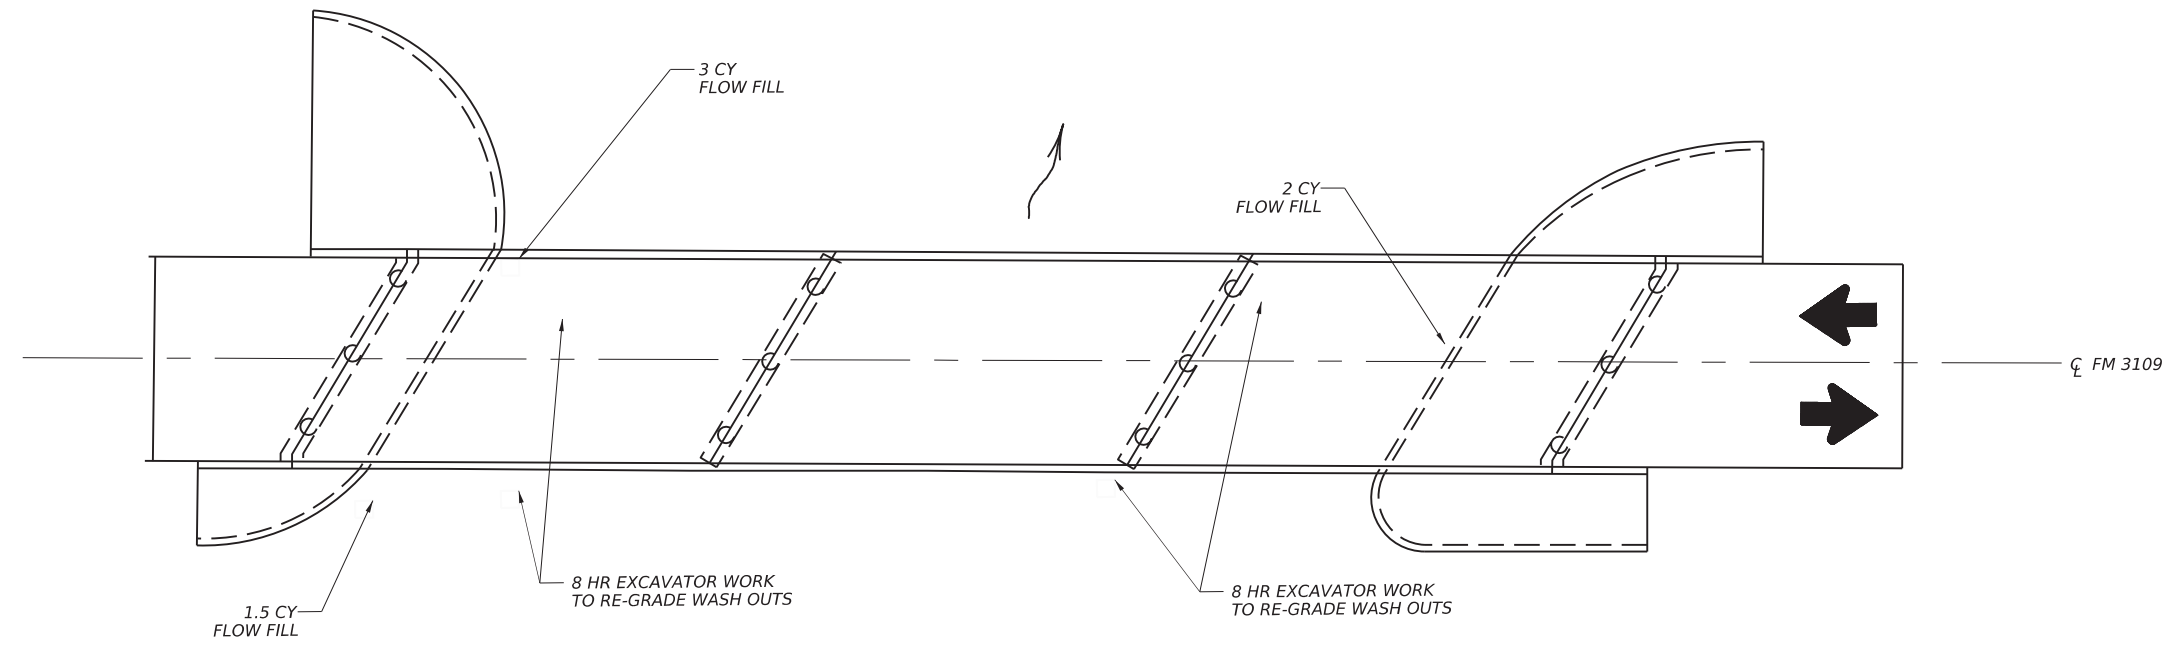


3 simple span prestressed concrete girder bridge on concrete supports (30° right fwd. skew)

- NOTES:
1. QUANTITIES ARE APPROXIMATE AND FIELD CONDITIONS MAY HAVE CHANGED FROM TIME OF INSPECTION. CONTRACTOR SHALL FIELD VERIFY QUANTITIES PRIOR TO BEGINNING WORK.
 2. APPROVAL FROM THE ENGINEER SHALL BE OBTAINED FOR ALL MATERIAL AND METHODS OF APPLICATION PRIOR TO THE BEGINNING OF THE REPAIR WORK.

DATE:
FILE:

N.T.S.



Andrew Mosley, P.E.
06/20/2024



**REFERENCE #14
BRIDGE LAYOUT**


NBI: 03-252-3149-02-004

**FM 3109 AT
GAGES CREEK**


FOR AREA OFFICE USE ONLY				
#	FUA ID	DATE COMPLETED	PICTURE/S TAKEN	ASSETWISE UPDATED
1	5522910			

FILE:	DWG:	CK:	DWG:	CK:
©TxDOT	JULY 2021	CONT	SECT	JOB
REVISIONS	6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.		
WFS	ARCHER, ETC	40		


DATE: 6/20/2024 4:52:10 PM
 FILE: T:\WFSE\GNP\IONS\MAINTENANCE CONTRACTS\BPM_FY_25\4 - Design\Plan Set\SD-EBR.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units.

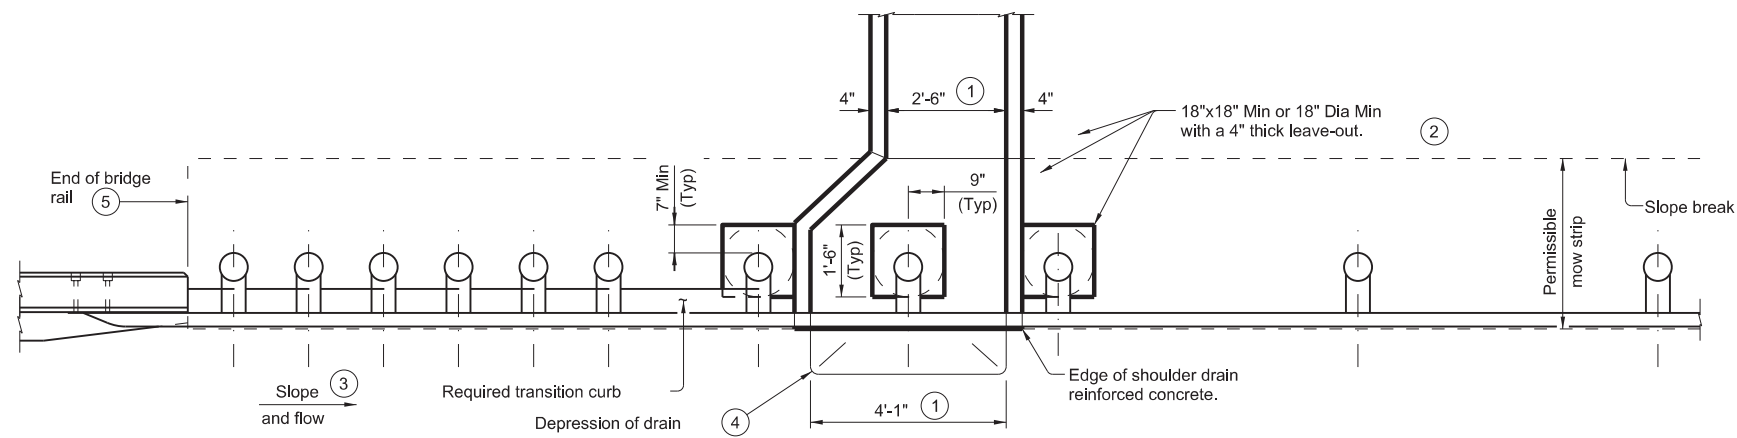


PLAN OF DRAIN WITH THRIE BEAM TRANSITION

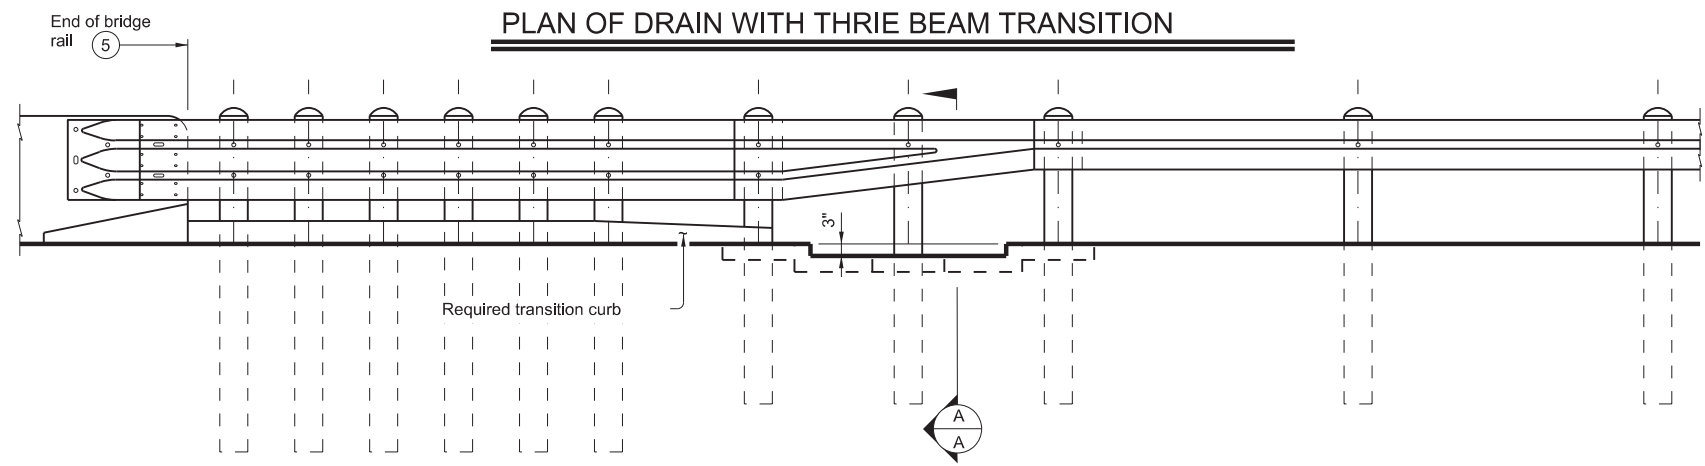


ROADWAY ELEVATION OF DRAIN WITH THRIE BEAM TRANSITION

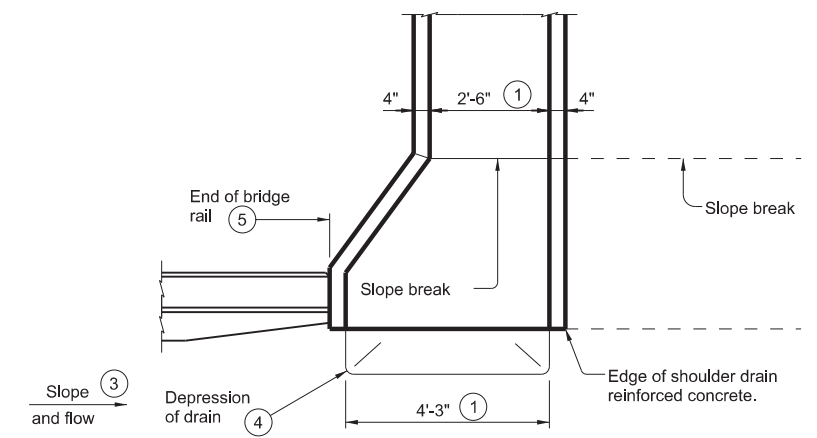


PLAN OF DRAIN WITHOUT MBGF TRANSITION

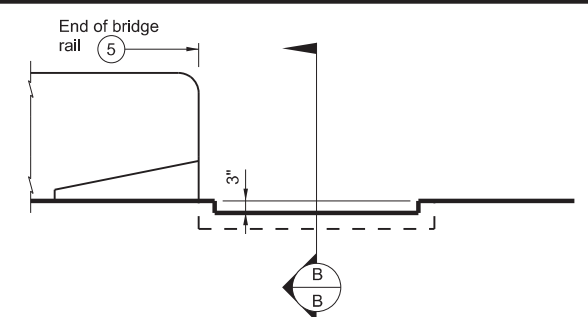


ROADWAY ELEVATION OF DRAIN WITHOUT MBGF TRANSITION

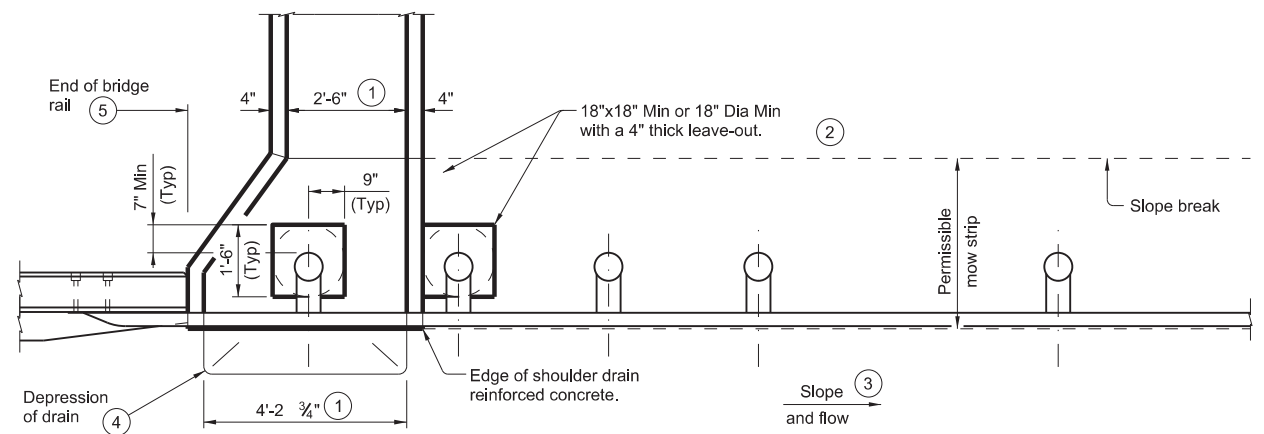


PLAN OF DRAIN WITH TL-2 (LOW SPEED) TRANSITION

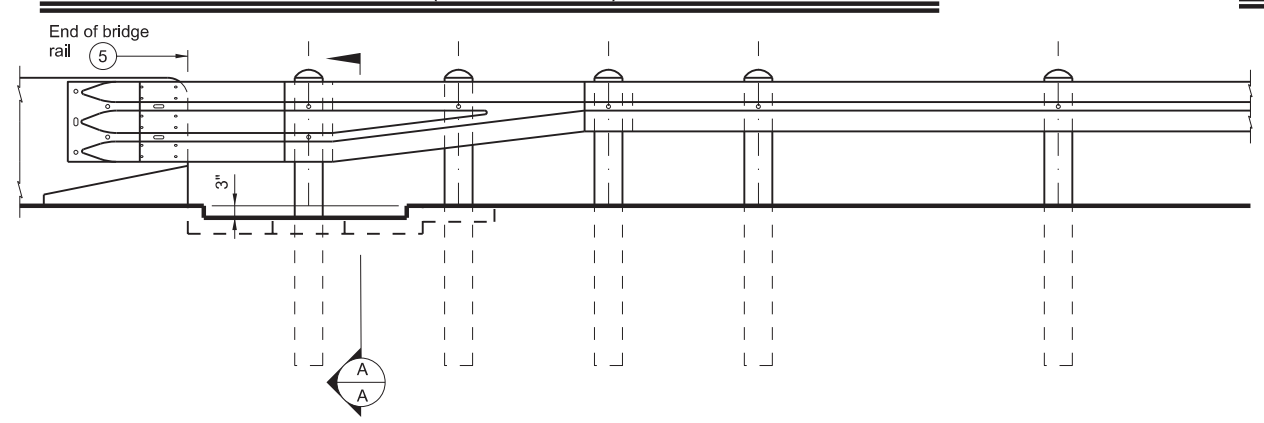

ROADWAY ELEVATION OF DRAIN WITH TL-2 (LOW SPEED) TRANSITION

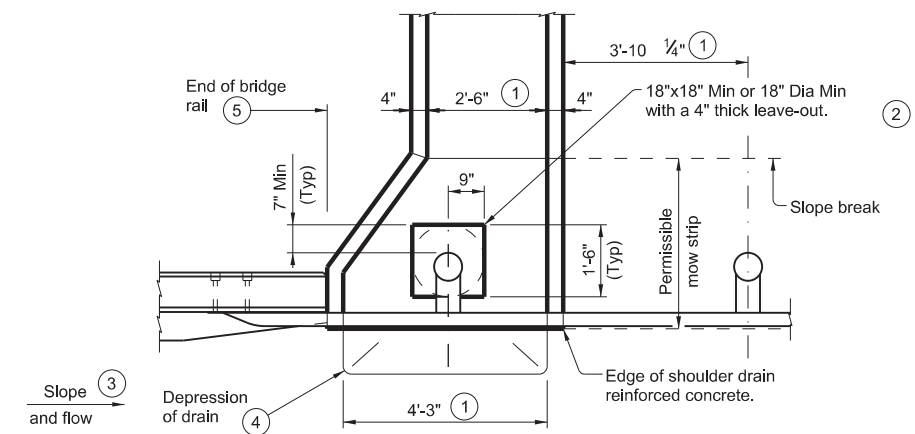

PLAN OF DRAIN WITH DOWNSTREAM ANCHOR TERMINAL

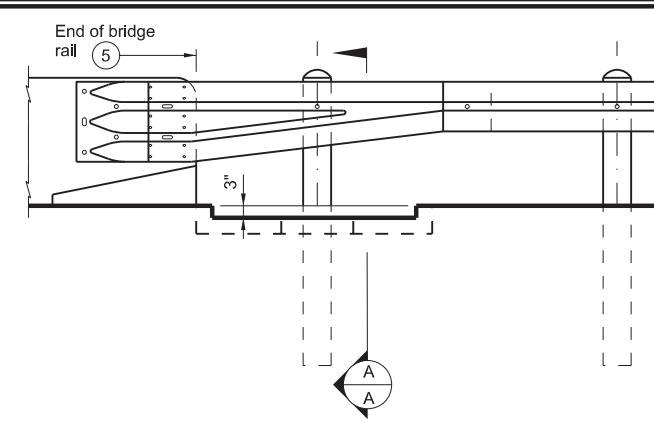


ROADWAY ELEVATION OF DRAIN WITH DOWNSTREAM ANCHOR TERMINAL

- ① Use wider or other drain configurations if shown elsewhere in plans or if directed by the Engineer. Location of shoulder drain must consider limitation imposed by rail transition. Do not locate shoulder drains at expansion joints between approach slab and concrete pavement.
- ② Fill leave-outs with no more than a 2-sack grout mixture (1 part cement, 5 parts water, and 14 parts sand by volume) with a 28-day compressive strength of approximately 120 psi or less. Provide grout of a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (20" Max leave-out).
- ③ For other slope and flow directions drain configuration may be mirrored wider or tapered wider if shown elsewhere in the plans or directed by the Engineer.
- ④ Form depression into concrete, asphalt pavement, or approach slab.
- ⑤ See Bridge Layout for rail type.


SHEET 1 OF 2

		Bridge Division Standard	
SHOULDER DRAIN AT END OF BRIDGE RAIL			
SD-EBR			
FILE: sdebr001-19.dgn	DN: TxDOT	CK: TAR	DW: JTR
©TxDOT April 2019	CONT: 6469	SECT: 86	JOB: 001
REVISIONS	HIGHWAY: SH 25, ETC		SHEET NO.: 41
DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.: 41	


DATE: 6/20/2024 4:52:12 PM
 FILE: T:\WFSE\CONTRACTS\BPM_FY_25\4 - Design\Plan Set\Drawings\SD-EBR.dgn
 CONTRACTS\BPM_FY_25\4 - Design\Plan Set\Drawings\SD-EBR.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units.

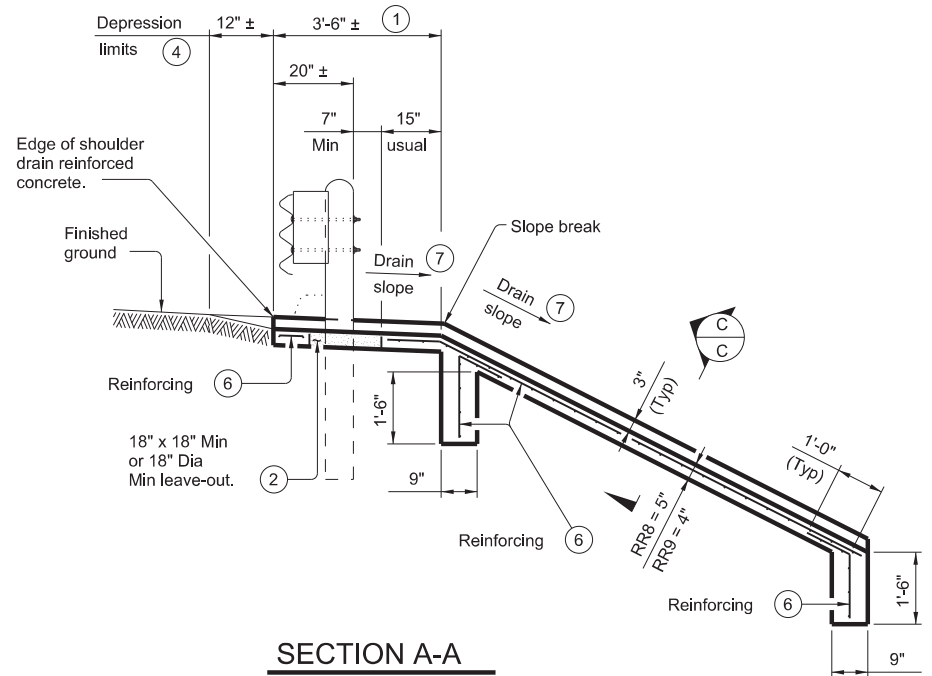

SECTION A-A

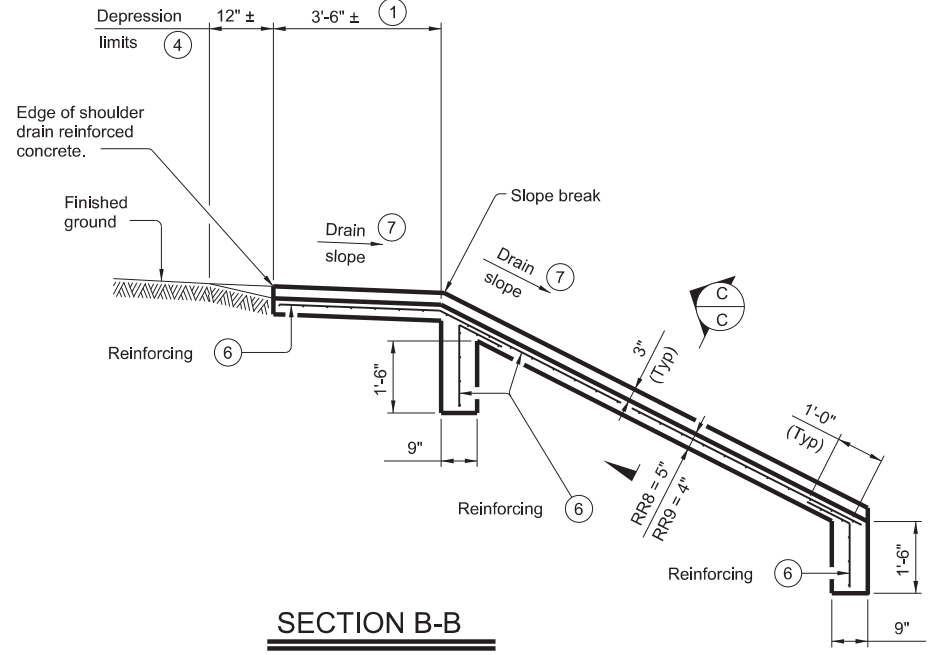


SECTION B-B

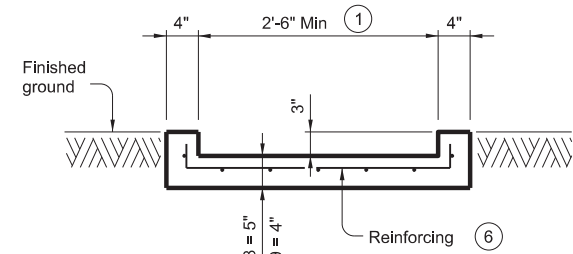


SECTION C-C

Sections shown without integrated riprap.

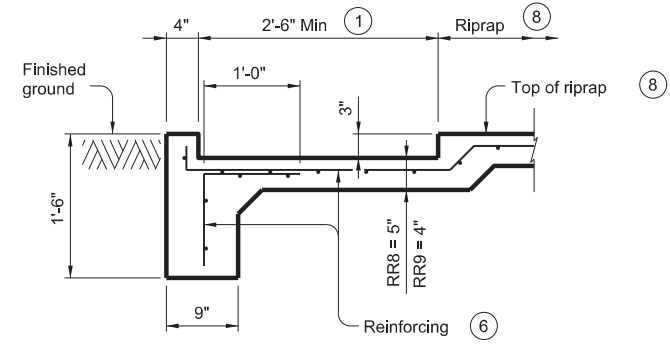

SECTION C-C

Sections shown with integrated riprap.

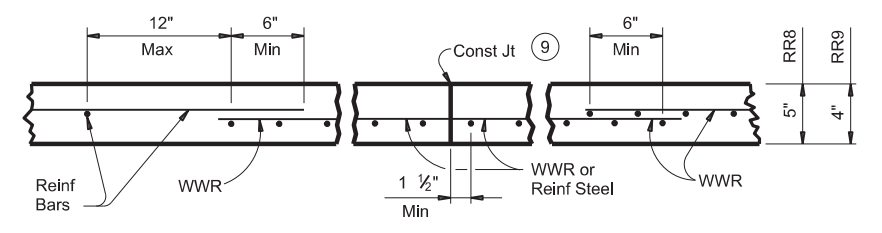

REINFORCEMENT DETAILS

See General Notes for optional synthetic fiber reinforcement.

- ① Use wider or other drain configurations if shown elsewhere in plans or if directed by the Engineer. Location of shoulder drain must consider limitation imposed by rail transition. Do not locate shoulder drains at expansion joints between approach slab and concrete pavement.
- ② Fill leave-outs with no more than a 2-sack grout mixture (1 part cement, 5 parts water, and 14 parts sand by volume) with a 28-day compressive strength of approximately 120 psi or less. Provide grout of a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (20" Max leave-out).
- ④ Form depression into concrete, asphalt pavement, or approach slab.
- ⑥ Provide (#3) reinforcing bar at 18" spacing c-c or welded wire reinforcement (WWR) as 6x6-D2.9xD2.9 or D3xD3. Combinations of WWR and reinforcing bars may be used if both are permitted. Use lap splices of a minimum 6 inches, measured from the transverse wire of WWR, and the ends of reinforcing bars, unless shown otherwise.
- ⑦ See elsewhere in plans or as directed by the Engineer.
- ⑧ See CRR standard for details and notes not shown.
- ⑨ WWR or reinforcing steel is continuous through riprap construction joints. Provide WWR or reinforcing steel that extends 1'-1" minimum into adjacent riprap on each side of construction joint even if synthetic fiber is utilized.

GENERAL NOTES:


Provide Class "B" concrete with a minimum compressive strength of 2,000 psi unless noted elsewhere in plans.
 Provide Grade 60 reinforcing steel.
 Provide deformed welded wire reinforcement (WWR) meeting ASTM A1064, unless otherwise shown.
 Provide reinforcing bars, deformed WWR, or any suitable combination of both types for riprap reinforcing, unless specified elsewhere in the plans.
 Optionally synthetic fibers may be used if approved by the Engineer. Provide synthetic fibers listed on the "Fibers for Concrete" Material Producer List (MPL) in lieu of steel reinforcing in riprap concrete.
 See Metal Beam Guard Fence (Mow Strip) standard for details and notes not shown.
 Payment for furnishing and placing 2-sack grout mixture will be subsidiary to shoulder drain.
 Payment for shoulder drain will be as per Item 420, "CI B Conc (Flume)". All details shown herein are subsidiary to shoulder drain. See Layout for limits of shoulder drain.
 RR8 is to be used on stream crossings.
 RR9 is to be used on other embankments.

SHEET 2 OF 2


		Bridge Division Standard	
<h2>SHOULDER DRAIN AT END OF BRIDGE RAIL</h2>			
<h3>SD-EBR</h3>			
FILE: sdebr001-19.dgn	DN: TxDOT	CK: TAR	DW: JTR
©TxDOT April 2019	CON: 6469	SECT: 86	JOB: 001
REVISIONS	6469	86	001
DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.:	42

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of any information derived from this standard.


DATE: 6/20/2024 4:52:14 PM
 FILE: T:\WFDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\06-01-25\STRIE1-19.dgn

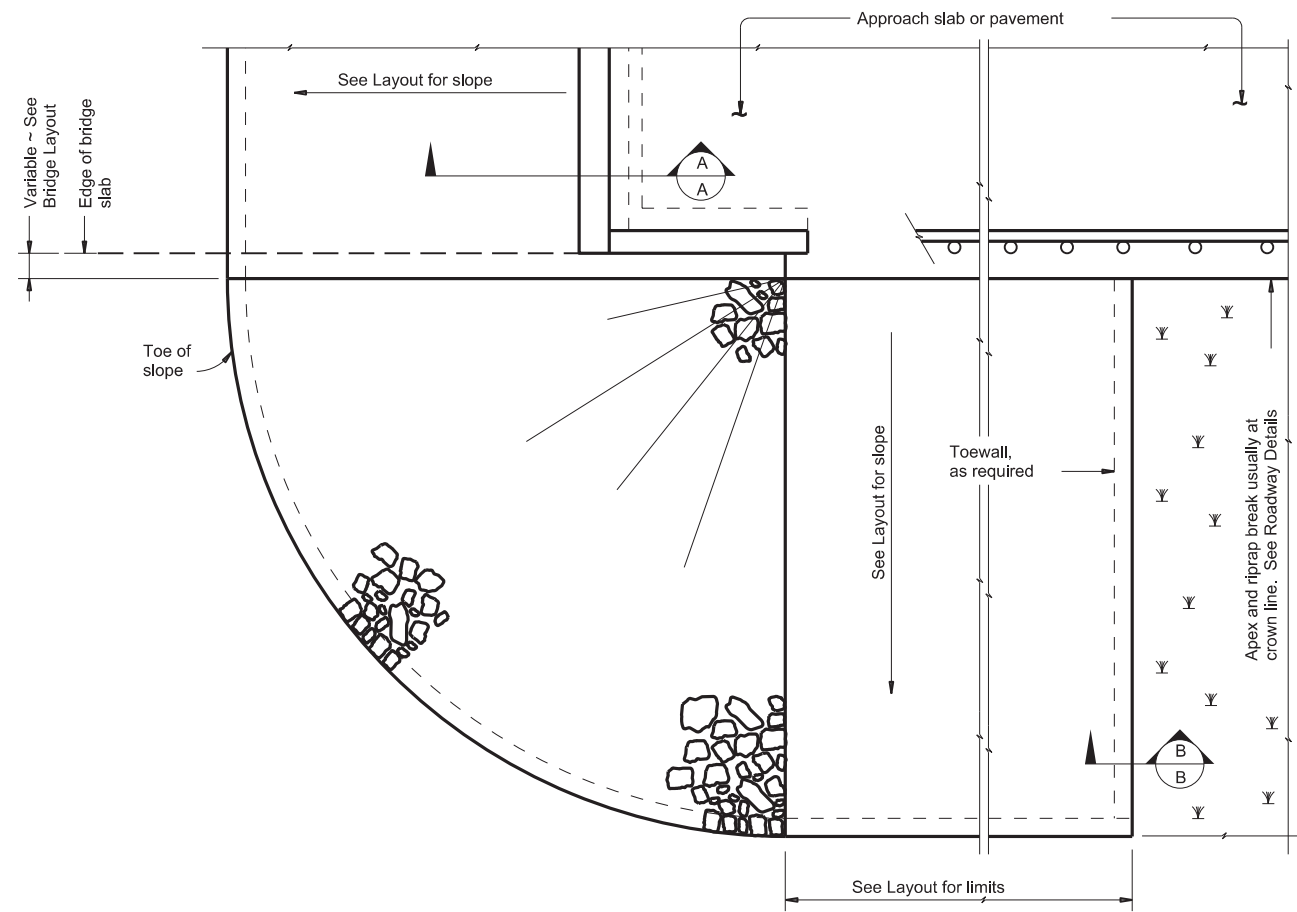


PLAN

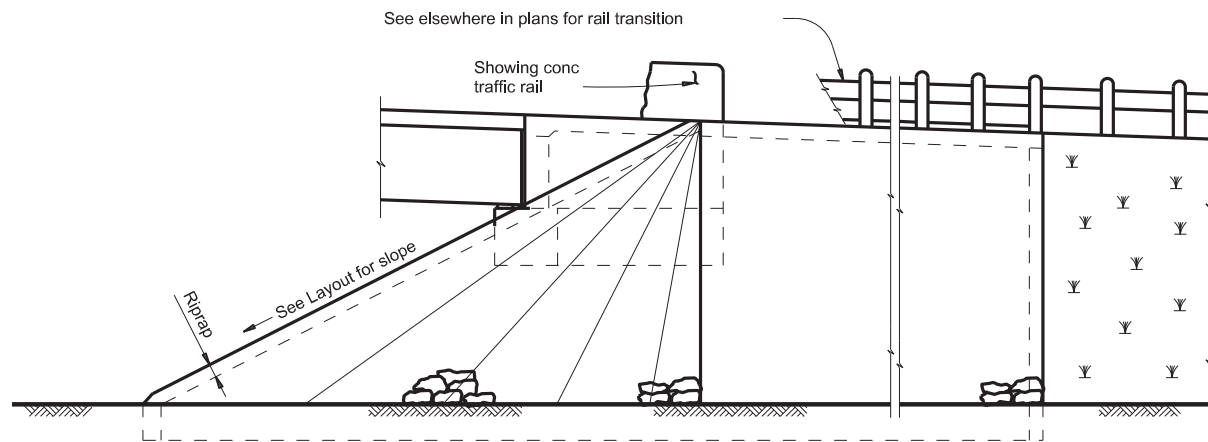

ELEVATION

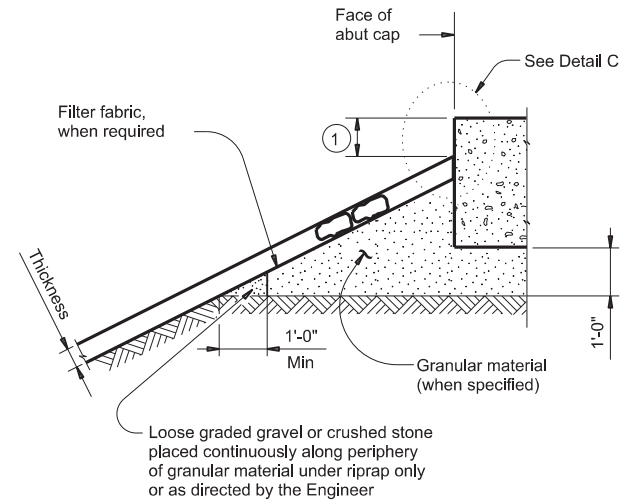


SECTION A-A AT CAP

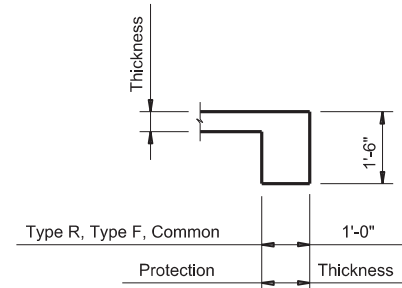

SECTION B-B

Provide toewall when shoulder drain is located adjacent to limits of stone riprap. Omit toewall when thickness of protection riprap is greater than 18".


8"X 18 Gage galvanized flashing full length of cap



CAP OPTION A

Nail flashing to cap or wingwall and seal with joint sealer

Plug ends and seal joint along ends of cap and side of wingwalls with joint sealer

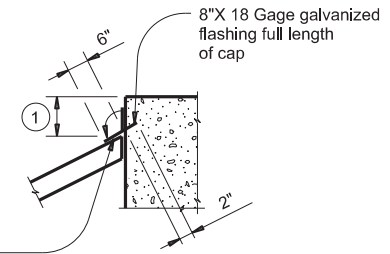

CAP OPTION B

DETAIL C

① Top of cap to top of riprap dimension varies as directed by the Engineer. Provide 9" Min for beam/slab type bridges and 1'-6" for slab span, box beam, or slab beam bridges.

GENERAL NOTES:

Refer to Item 432, "Riprap" for stone size and gradation, and construction details. See Layout for limits and thickness of riprap specified.
 See elsewhere in plans for locations and details of shoulder drains.

SHEET 1 OF 2

		Bridge Division Standard	
<h2>STONE RIPRAP</h2>			
<h3>SRR</h3>			
FILE: srrstd1-19.dgn	DN: AES	CK: JGD	DW: BWH
©TxDOT April 2019	CONT	SECT	JOB
REVISIONS	6469	86	001
DIST	COUNTY	SHEET NO.	
WFS	ARCHER, ETC	43	

DATE: 6/20/2024 4:52:15 PM
 FILE: T:\WFDESIGN\IONS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Plan\IONS\IONS\IONS.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or the accuracy of the information presented herein.

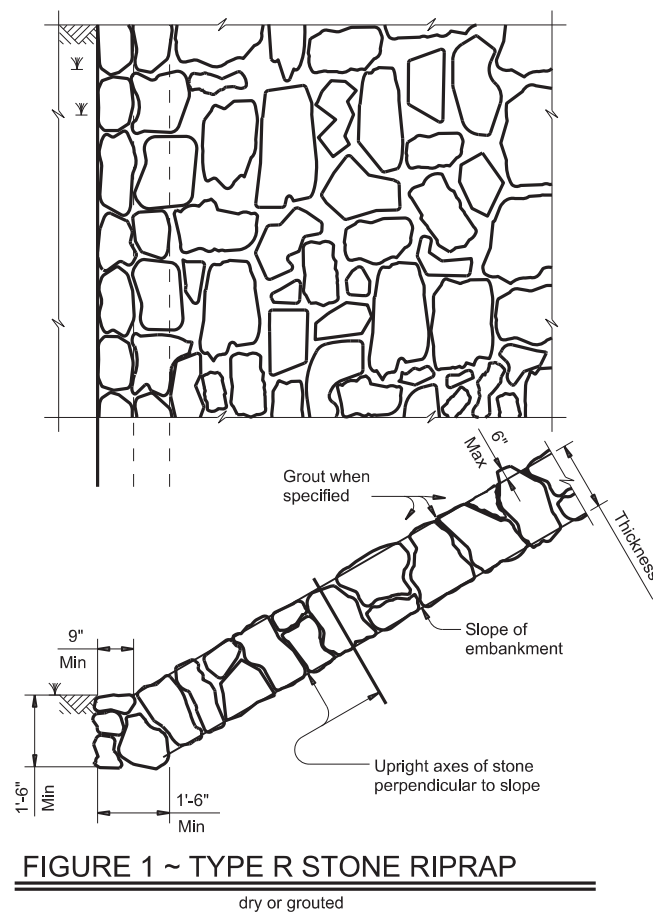


FIGURE 1 ~ TYPE R STONE RIPRAP
dry or grouted

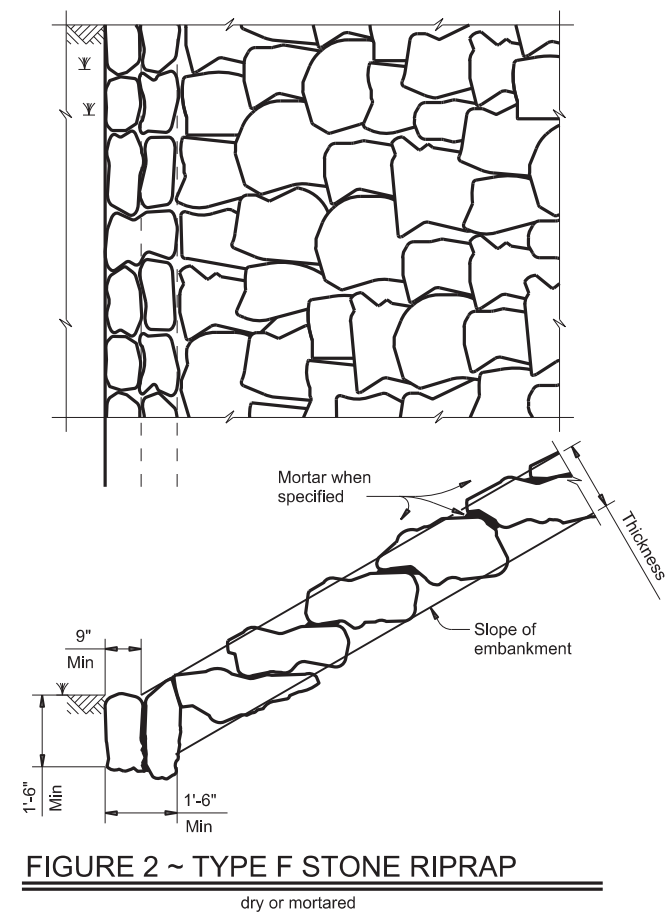


FIGURE 2 ~ TYPE F STONE RIPRAP
dry or mortared

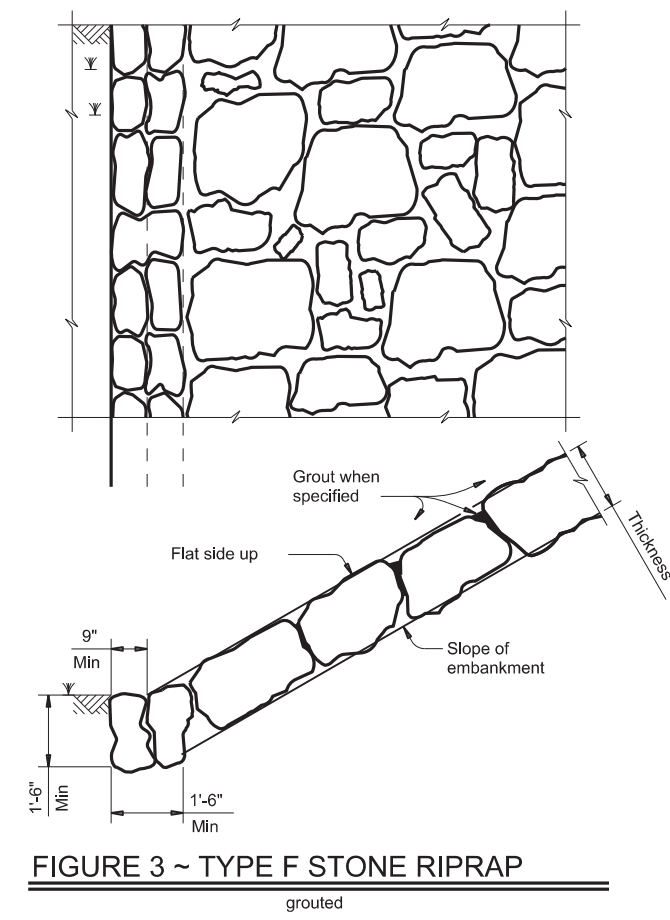


FIGURE 3 ~ TYPE F STONE RIPRAP
grouted

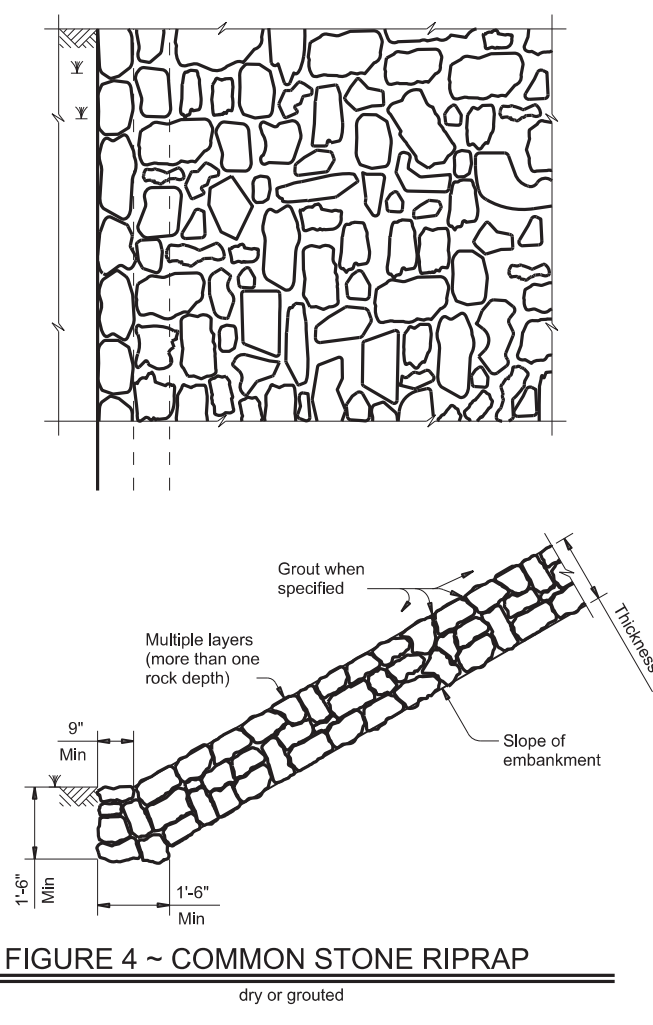


FIGURE 4 ~ COMMON STONE RIPRAP
dry or grouted


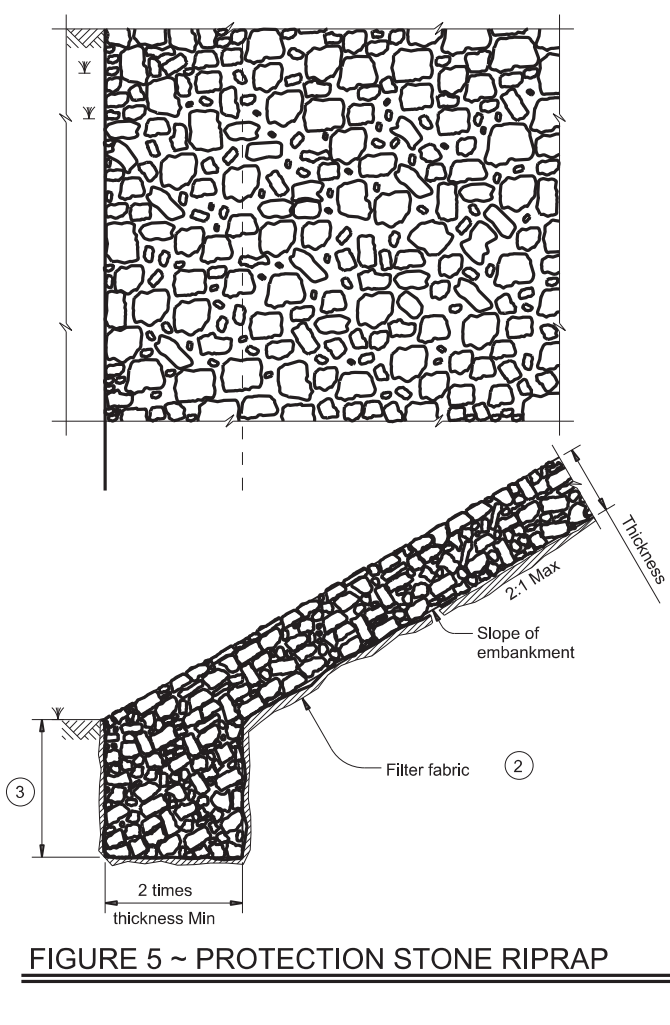


FIGURE 5 ~ PROTECTION STONE RIPRAP

- ② Provide bedding material instead of filter fabric if shown elsewhere in plans. See Layout for thickness of bedding material.
- ③ Minimum toe depth is the larger of the maximum scour depth or 2 times the riprap thickness.
- ④ "Y" and Height need to be defined. See layout or detail sheet for values if this option is used.
- ⑤ List Stone Protection as size (XX inch) and thickness (YY inch) on the layout.
Example: Riprap (Stone Protection) XX inch, Thickness = YY inch.

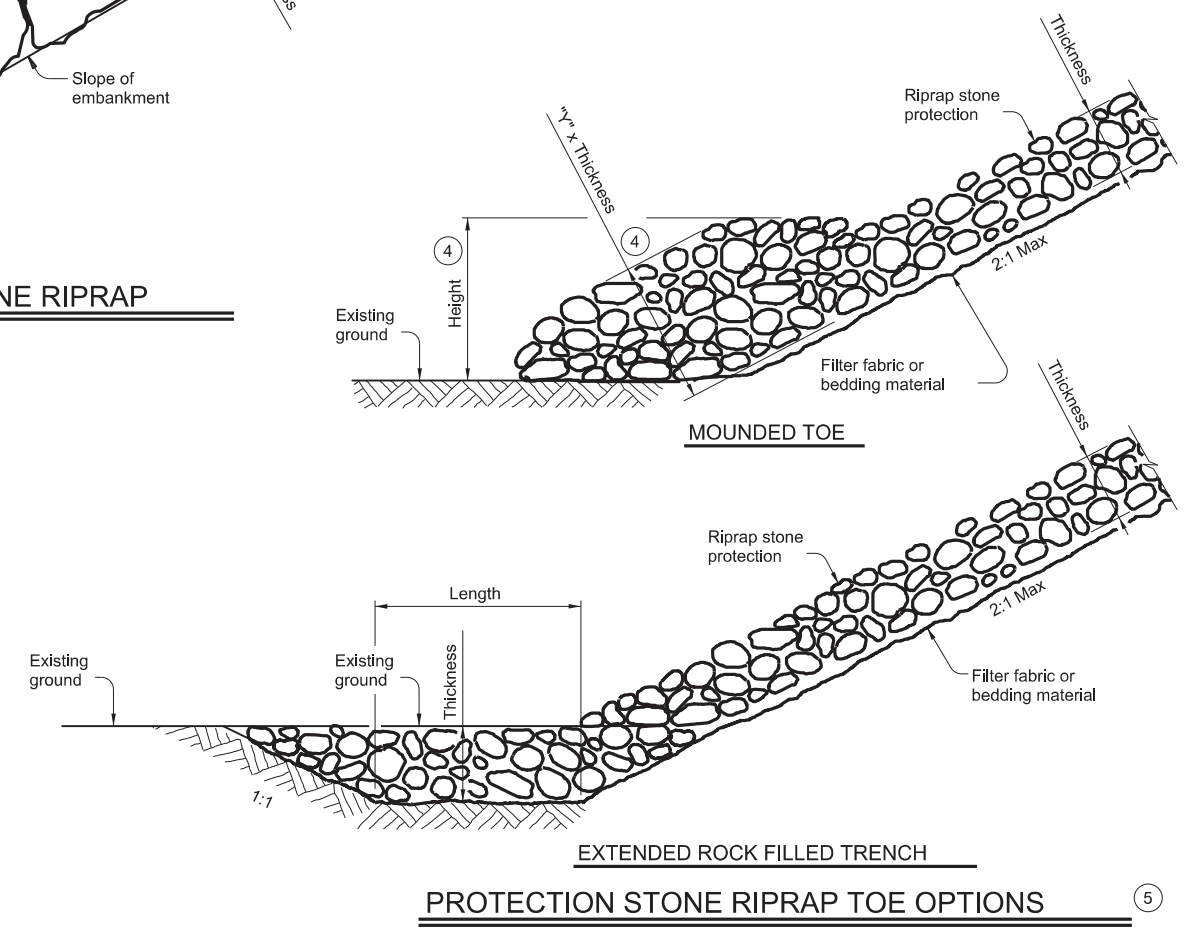


PROTECTION STONE RIPRAP TOE OPTIONS


SHEET 2 OF 2

		Bridge Division Standard	
<h2>STONE RIPRAP</h2>			
<h3>SRR</h3>			
FILE: srrstd1-19.dgn	DN: AES	CK: JGD	DW: BWH
©TxDOT	Apr 2019	CONT: 6469	SECT: 86
REVISIONS		JOB: 001	HIGHWAY: SH 25, ETC
DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO. 44	


DATE: 6/20/2024 4:52:16 PM
 FILE: T:\WFSDESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 2514 - Design\Plan Set\Graham BPM7 - Bridge\DETAILS AND STANDARDS\BRIDGE JOINT REPLACEMENT DETAILS.dgn

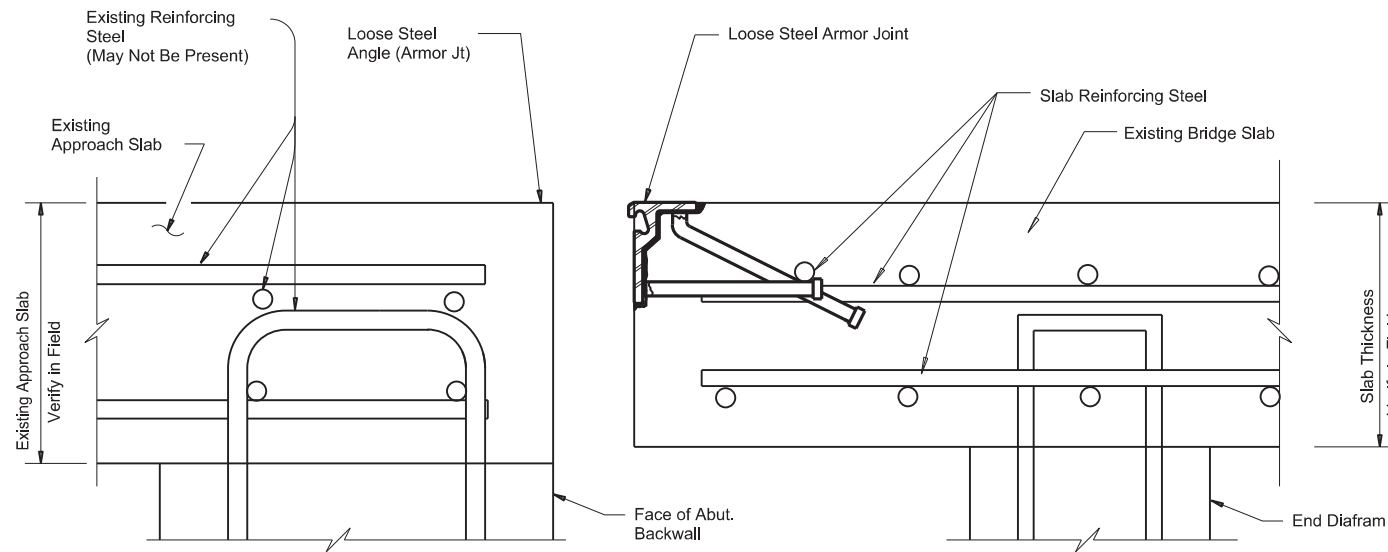


① **EXISTING EXPANSION JOINT**
 (Actual Joint Configuration may be other than shown)

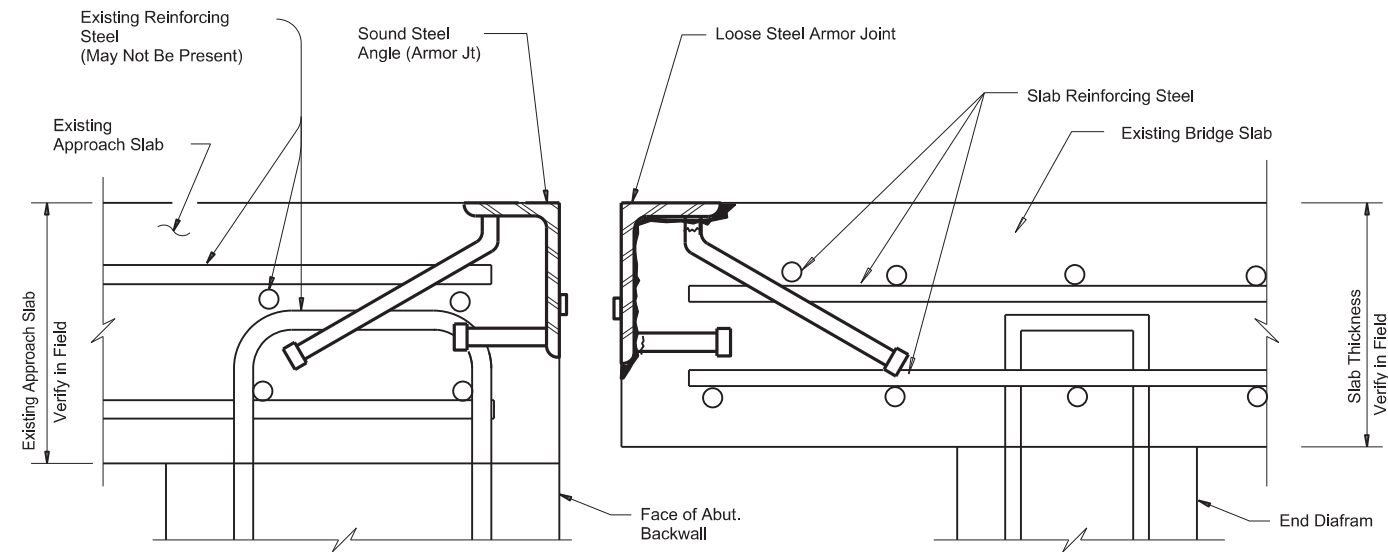

① **EXISTING EXPANSION JOINT**
 (Actual Joint Configuration may be other than shown)

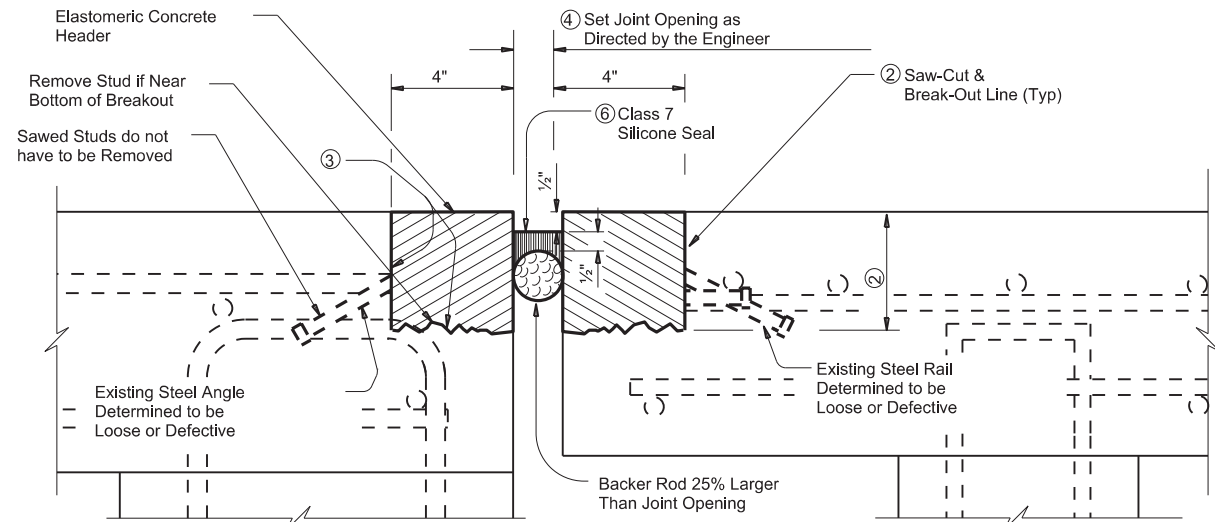

ELASTOMERIC CONCRETE HEADER REPAIR (BOTH SIDES)
 (Actual Joint Configuration may be other than shown)

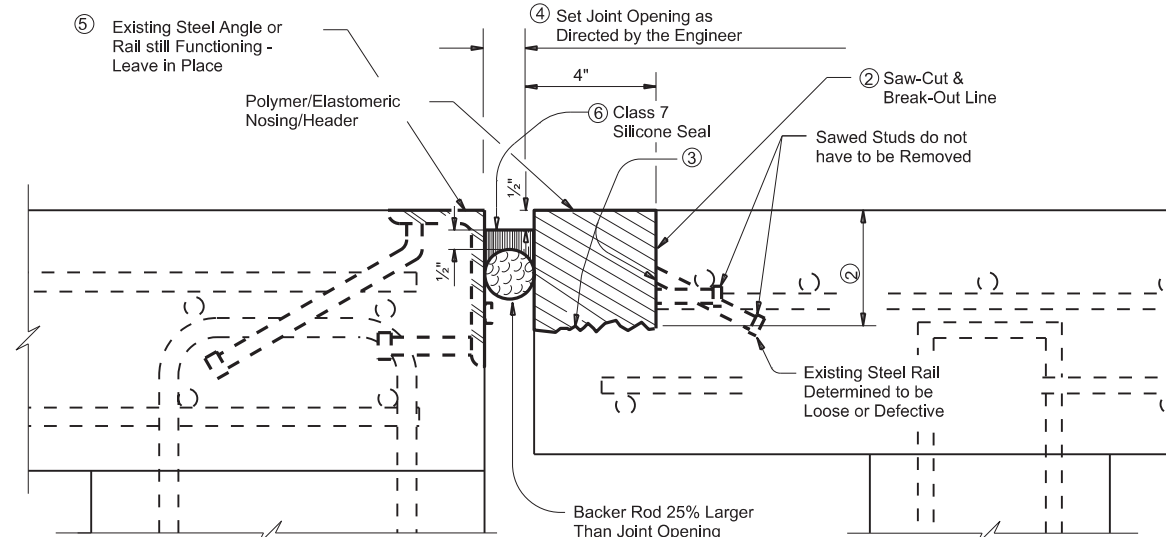

ELASTOMERIC CONCRETE HEADER REPAIR (ONE SIDE)
 (Actual Joint Configuration may be other than shown)

NOTES

- ① VERIFY ACTUAL JOINT CONDITION AND BRIDGE CONFIGURATION PRIOR TO BEGINNING WORK.
- ② SAW CUT CONCRETE TO REMOVE EXISTING PORTIONS OF STEEL JOINTS THAT ARE LOOSE. DEPTH OF SAW CUT IS AS REQUIRED TO REMOVE STEEL JOINT AND ANY DEFECTIVE CONCRETE. THE MINIMUM THICKNESS OF NOSING/HEADER MATERIAL SHALL BE 1 1/2" OR AS SPECIFIED BY THE MANUFACTURER.
- ③ SURFACES WHERE ELASTOMERIC CONCRETE IS TO BE PLACED MUST BE CLEAN AND DRY IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.
- ④ JOINT OPENING SHALL BE AS DIRECTED BY THE ENGINEER OR AS SHOWN ON THE EXPANSION JOINT STANDARD.
- ⑤ SANDBLAST EXISTING STEEL SURFACE WHERE SILICONE SEAL IS TO BE PLACED.
- ⑥ SEAL WHEN REQUIRED AS DIRECTED BY THE ENGINEER. EXTEND SEALANT UP INTO RAIL OR CURB 6 INCHES ON LOW SIDE OR SIDES OF DECK.

GENERAL NOTES

CONSTRUCTION IN ACCORDANCE WITH ALL RELEVANT STANDARD SPECIFICATIONS AND AS OUTLINED IN THE SPECIAL SPECIFICATION "EXPANSION JOINT REPAIR".
 MATERIAL FOR HEADER AND SILICONE SEALANT IN ACCORDANCE WITH ITEM 454, "BRIDGE EXPANSION JOINT".
 PAYMENT AS SPECIFIED BY ITEM 785-6002 BRIDGE JOINT REPAIR (POLYMER). SEE ITEM 785 BRIDGE JOINT REPAIR OR REPLACEMENT.

SUMMARY OF STRUCTURES TO BE REPAIRED

STRUCTURE ID	ROADWAY	FEATURE CROSSED
03-252-0-0256-01-017	SH 67	BRAZOS RIVER



Andrew Mosley, P.E.
 06/20/2024




BRIDGE JOINT REPLACEMENT DETAILS (POLYMER)

03-252-0-0256-01-017
 ONE-TIME USE ONLY


CONT		SHEET 1 OF 1	
6469	86	JOB	001
DIST		COUNTY	SHEET NO.
WFS		ARCHER, ETC	45

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

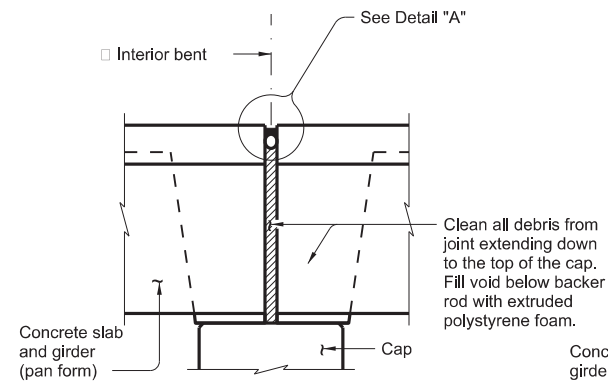


JOINT WITH SILICONE SEAL

(Used without ACP overlay)

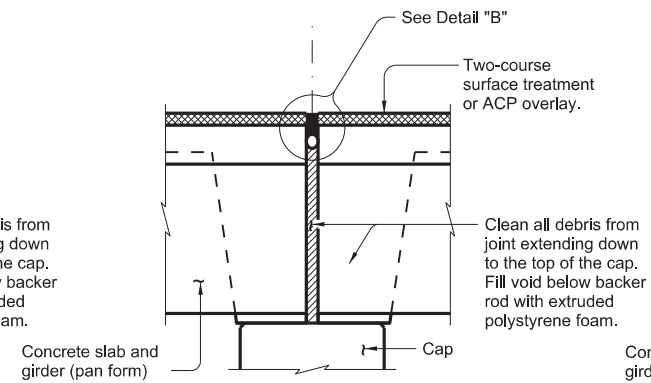


JOINT W/ HOT-POURED RUBBER SEAL


(Used with ACP overlay)

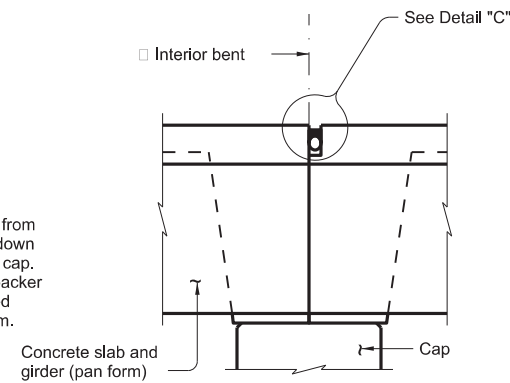


FIXED JOINT

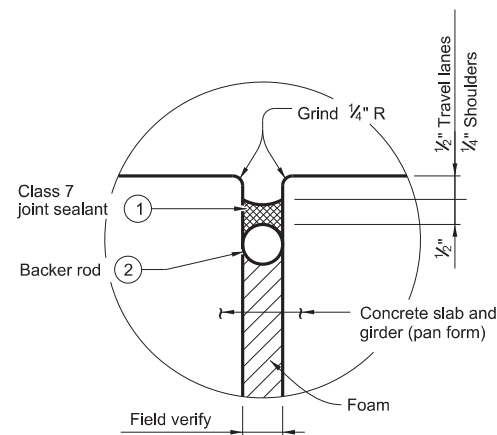

DETAIL "A"

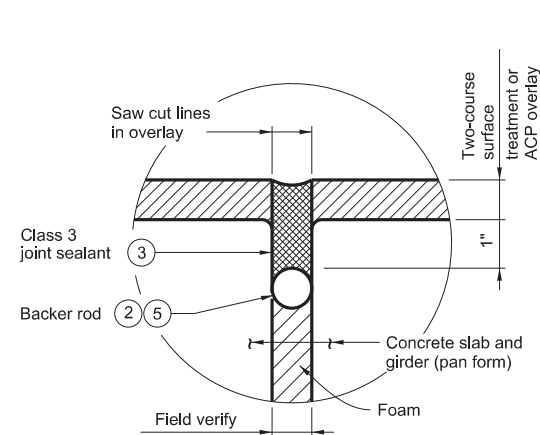

DETAIL "B"

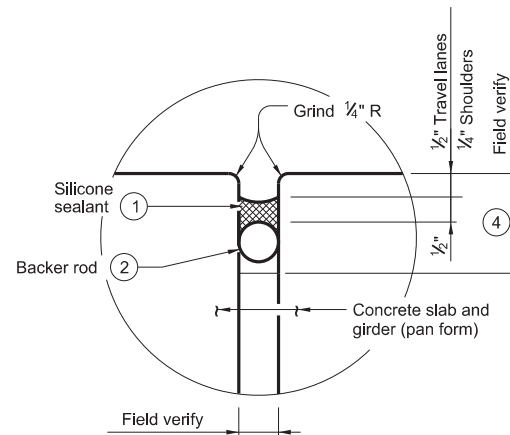

DETAIL "C"

PROCEDURE FOR CLEANING AND SEALING EXISTING CONCRETE GIRDER JOINT WITH SILICONE SEAL:

- 1) Clean joint opening of all existing expansion materials/devices, dirt, and all other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints." Clean joint out full depth of the joint.
- 2) Obtain approval of cleaned joint prior to proceeding with joint sealing operation.
- 3) Fill void with extruded polystyrene foam.
- 4) Place backer rod into joint opening 1" below the top of concrete.
- 5) Seal the joint opening with a Class 7 joint sealant. Recess seal 1/2" below top of concrete in travel lanes and 1/4" below top of concrete in shoulders.

PROCEDURE FOR CLEANING AND SEALING EXISTING CONCRETE GIRDER JOINT WITH HOT POURED RUBBER SEAL:

- 1) Saw cut through the asphalt at the centerline of joint. Make multiple saw cuts to create a 1/2" minimum joint opening or match the existing joint opening. Clean joint opening of all old expansion materials/devices, bituminous materials, dirt, grease and all other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints." Clean joint out full depth of the joint.
- 2) Obtain approval of cleaned joint prior to proceeding with joint sealing operation.
- 3) Fill void with extruded polystyrene foam.
- 4) Place backer rod into joint opening 1" below the top of concrete.
- 5) Seal the joint opening with a Class 3 joint sealant. Seal flush to the top of the asphaltic concrete pavement.

PROCEDURE FOR CLEANING AND SEALING EXISTING FIXED JOINTS:

- 1) Remove existing seal and debris from recess.
- 2) Abrasive blast clean existing surfaces where silicone seal is to be placed.
- 3) Obtain approval of cleaned joint prior to proceeding with joint sealing operation.
- 4) Place backer rod into joint opening 1" below the top of concrete.
- 5) Seal the joint opening with a Class 7 joint sealant. Recess seal 1/2" below top of concrete in travel lanes and 1/4" below top of concrete in shoulders.


- 1) Use Class 7 joint sealant. Prepare joint and seal in accordance with Item 438, "Cleaning and Sealing Joints."
- 2) Provide backer rod 25% larger than joint opening and compatible with the sealant. Use of multiple pieces to create a backer rod cross section is not permitted. Top of backer rod must be convex as shown.
- 3) Use Class 3 joint sealant. Prepare joint and seal in accordance with Item 438, "Cleaning and Sealing Joints."
- 4) Backer rod may be omitted if existing joint depth is less than 1 1/2".
- 5) Backer rod must be compatible with the hot poured rubber sealant and rated for a minimum of 400°F.

GENERAL NOTES:

Cleaning existing joint opening (full depth) of all debris, providing and placing backer rod, saw-cutting asphalt overlay, and sealing joint is paid for by Item 438, "Cleaning and Sealing Joints" and measured by the linear foot. Obtain approval for all tools, equipment, materials and techniques proposed to clean and seal the joint. Provide Class 3 joint sealant in accordance with DMS-6310, "Joint Sealants and Fillers" for joints in asphalt overlay. Provide Class 7 joint sealant in accordance with DMS-6310, "Joint Sealants and Fillers" for joints in concrete. Extend sealant up into rail or curb 3 inches on low side or sides of deck. If the Class 7 joint sealant cannot be effectively placed in the vertical position, a Class 4 joint sealant compatible with the Class 7 joint sealant is allowed for the extension of the seal into the curb or rail. Prepare surfaces where sealant is to be placed in accordance with Manufacturer's specifications.

SHEET 1 OF 2

<p>CLEANING AND SEALING EXISTING BRIDGE JOINTS (PAN GIRDER BRIDGES) (ONE TIME USE) NBI: 03-005-0814-02-007 NBI: 03-252-3149-02-002</p>			
FILE:	DWG: TxDOT	CK: TxDOT	DW: TxDOT
©TxDOT February 2024	CONT: 6469	SECT: 86	JOB: 001
REVISIONS:	DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.: 46



Andrew Mosley, P.E.

06/20/2024









DATE:
FILE:

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:


TABLE OF ESTIMATED QUANTITIES

STRUCTURE NUMBER (FEATURE CROSSED)	JOINT TYPE	ITEM	DESCRIPTION	NUMBER OF JOINTS	QUANTITY (LF)
03-005-0814-02-007 @ KICKAPOO CREEK	CLASS 3	438-6002	END OF BRIDGE EXPANSION JOINT	2	76
03-252-3149-02-002 @ FISH CREEK	CLASS 3	438-6002	BRIDGE EXPANSION JOINTS	3	72

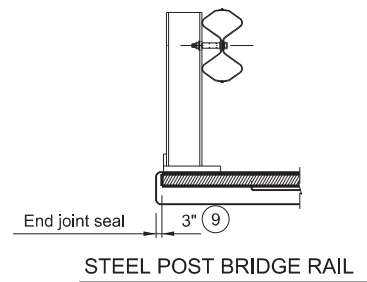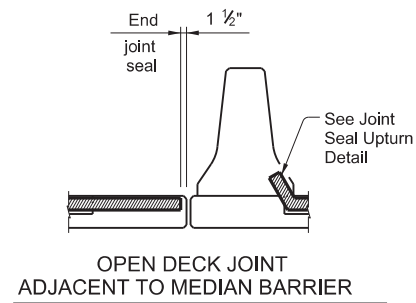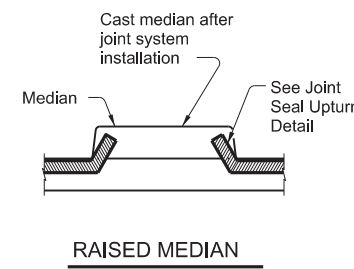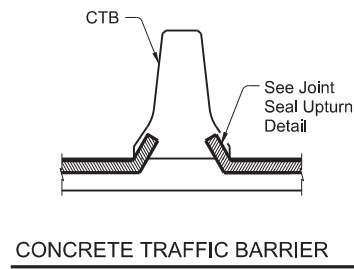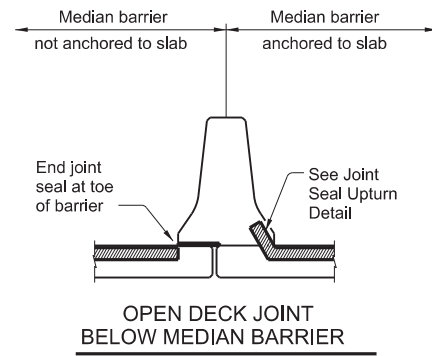

JOINT SEALANT TERMINATION DETAILS

⑨ 1 1/2" for precompressed foam and silicone seal

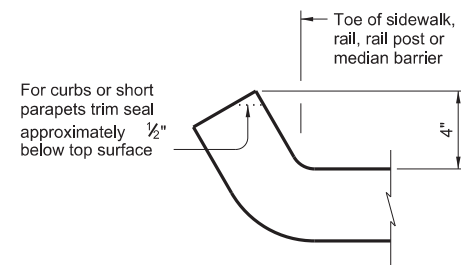

JOINT SEAL UPTURN DETAIL

For curbs or short parapets trim seal approximately 1/2" below top surface


SHEET 2 OF 2



CLEANING AND SEALING EXISTING BRIDGE JOINTS

(PAN GIRDER BRIDGES)
(ONE TIME USE)

NBI: 03-005-0814-02-007
NBI: 03-252-3149-02-002



Andrew Mosley, P.E.

06/20/2024


FILE:	DWG: TxDOT	CHK: TxDOT	DWG: TxDOT	CHK: TxDOT
©TxDOT February 2024	CONT: 6469	SECT: 86	JOB: 001	HIGHWAY: SH 25, ETC
REVISIONS:	DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.: 47	

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

APPROVED STRIP SEAL SYSTEM MANUFACTURERS


Manufacturer	Strip Seal
	Seal Type
D.S. Brown	V-400
R.J. Watson	SF-400
SSI	SSS-400
Watson Bowman ACME	SPS-400

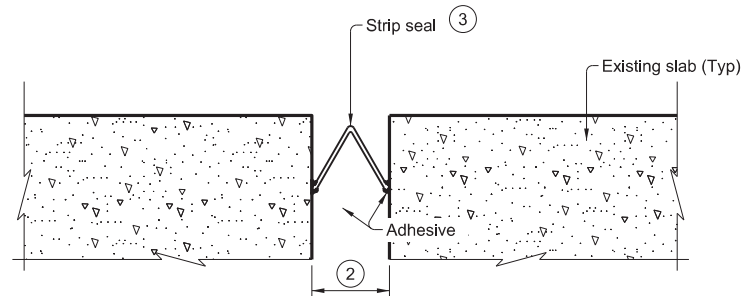


BONDED STRIP SEAL ON CONCRETE

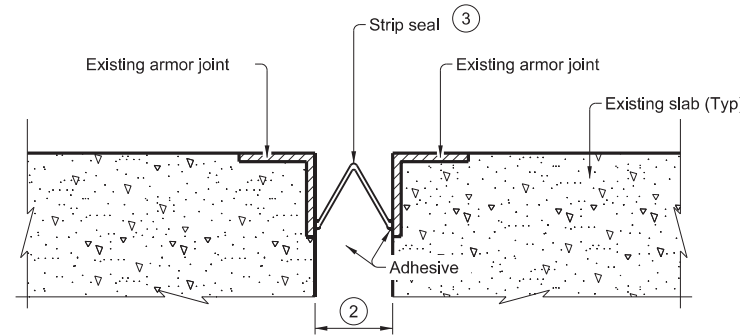

BONDED STRIP SEAL ON ARMOR JOINT

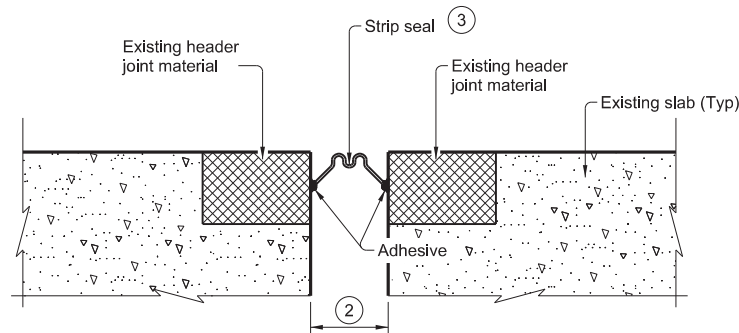

BONDED STRIP SEAL ON HEADER JOINT

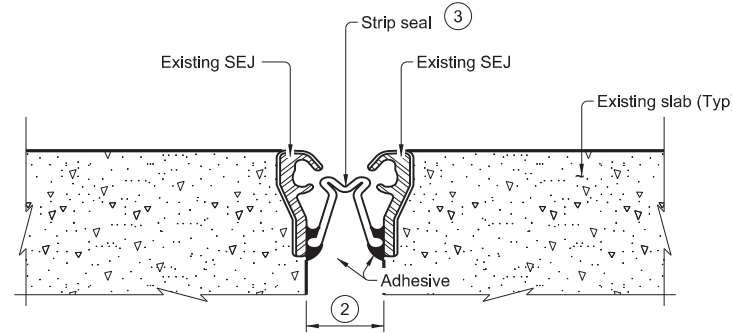

BONDED STRIP SEAL ON SEJ-M

Used to repair failed strip seals. Showing SEJ-M.
Other sections similar.


- ① The PRE-INSTALLATION CONDITIONS and INSTALLATION PROCEDURE FOR NEW AND EXISTING JOINTS are meant to be general guides. See manufacturer specific procedures and instructions for detailed guidance.
- ② Recommended minimum installation width is 2".
- ③ Regardless of seal type shown, any strip seal system from the table above may be used in this application.

PRE-INSTALLATION CONDITIONS ①


- Ambient and surface temperatures must be at least 40°F.
- Joint surfaces must be completely dry. Do not install strip seal system immediately after a rain event or if precipitation is forecast for the day.
- Prepare joints and install strip seal system on the same day.
- No traffic is allowed to cross over primed and sandblasted joints.
- If necessary, repair existing joint appropriately per TxDOT Item 785, "Bridge Joint Repair or Replacement."
- Ensure that all materials associated with preparation and installation of strip seal are compatible.

INSTALLATION PROCEDURE FOR NEW AND EXISTING JOINTS ①


- Abrasive blast the vertical faces of the joint (steel or concrete) then clean with a cloth saturated in denatured alcohol.
- Apply the surface primer to the vertical joint faces. Follow all manufacturer's instructions for preparation and application of surface primer.
- Ready the strip seal next to the joint opening and clean thoroughly with a cloth saturated in denatured alcohol.
- Using a caulking tool, apply an initial bead of adhesive at least $\frac{3}{8}$ " in diameter to both vertical faces of the joint below the top surface of the joint.
- Place the strip seal into the joint above the initial bead of adhesive. Gradually press the seal downward while maintaining contact between the seal's sides and joint header. Position the strip seal so that seal top is at least $\frac{1}{2}$ " below the riding surface.
- Place a second bead of adhesive along each side of the strip seal no higher than the top of the strip seal's serrations. Ensure that this layer of adhesive is in contact with the strip seal and joint faces.
- Tool the second layer of adhesive with a tongue depressor (or other suitable tool) to create a concave face that is completely in contact with the joint faces.
- Cure the strip seal system per manufacturer's recommendations prior to permitting traffic on the bridge.

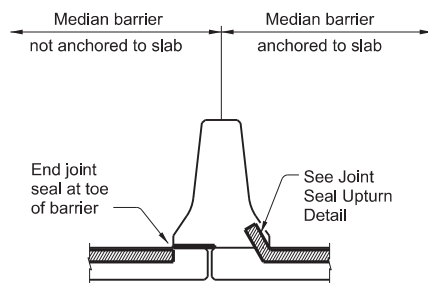


OPEN DECK JOINT BELOW MEDIAN BARRIER



CONCRETE TRAFFIC BARRIER




SIDEWALK BEHIND BRIDGE RAIL

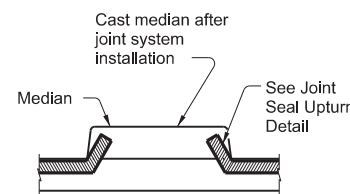


RAISED MEDIAN


For curbs or short parapets trim seal approximately $\frac{1}{2}$ " below top surface




JOINT SEAL UPTURN DETAIL

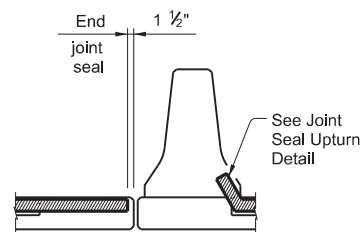


OPEN DECK JOINT ADJACENT TO MEDIAN BARRIER



CONCRETE BRIDGE RAIL




SIDEWALK



STEEL POST BRIDGE RAIL

JOINT SEALANT TERMINATION DETAILS



Andrew Mosley, P.E.

06/20/2024



CLEANING AND SEALING EXISTING BRIDGE JOINTS (STRIP SEAL) (One Time Use)

NBI: 03-005-0655-02-005

FILE:	DNR: TxDOT	CK: TxDOT	DW: TxDOT	CR: TxDOT
©TxDOT February 2024	CONT: 6469	SECT: 86	JOB: 001	HIGHWAY: SH 25, ETC
REVISIONS:	DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.: 48	

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/20/2024 4:52:22 PM
 FILE: T:\WFSDESIGN\Plans\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM7 - Bridge\DETAILS AND STANDARDS\PARTIAL_DEPTH DECK REPAIR.dgn


TABLE OF ESTIMATED QUANTITIES

Item	Description	Units	Quantity
429-6003	CONC STR REPAIR (DECK REP (PART DEPTH))	SF	60

REINFORCING BAR TABLE

Bar	Size	Max Spa	Bar Laps	
			Uncoated	Coated
A	#5	6"	2'-0"	3'-0"
T	#4	9"	1'-7"	2'-5"

Reinforcing steel is approximately 3 lbs/sf per mat

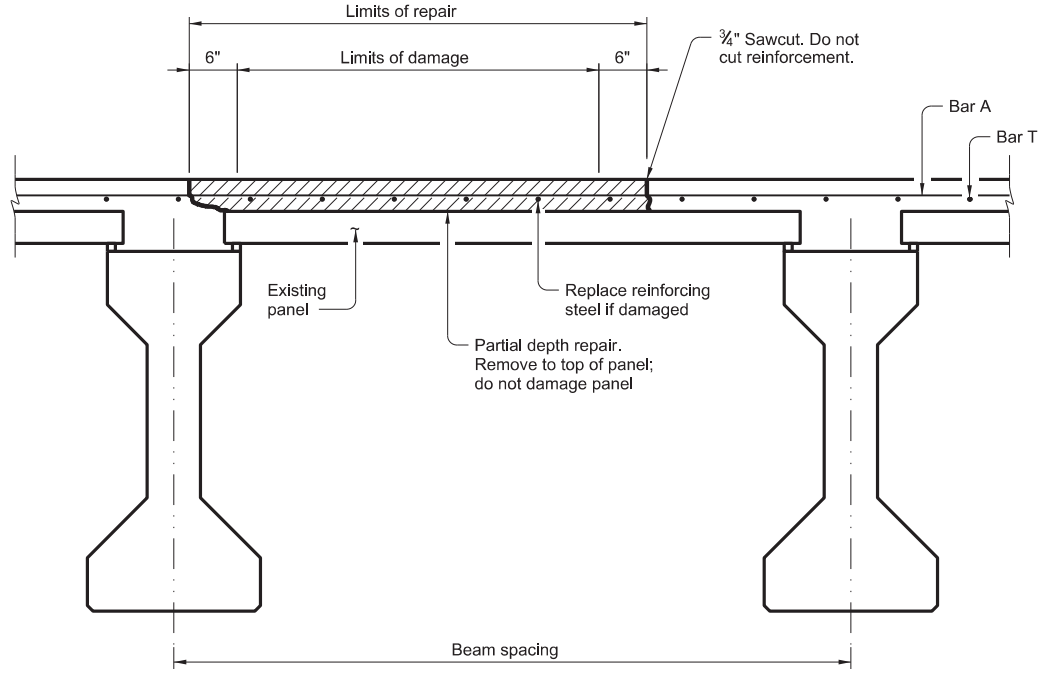

PARTIAL DEPTH DECK REPAIR WITH PANELS

(Showing concrete beams)

REPAIR PROCEDURE

Refer to the TxDOT Concrete Repair Manual Chapter 3, Section 4 for detailed repair steps.

- 1) Sound repair area and mark limits using straight lines in the presence of the Engineer.
- 2) Saw cut the entire perimeter of the repair boundary $\frac{3}{4}$ " deep without cutting into existing reinforcement. If damaged concrete rests atop PCP, ensure the panel is undamaged, and do not cut into the panel for repairs. If the panel is damaged, perform full-depth deck repairs.
- 3) Use power-driven chipping tools (up to 30lb. hammer) or hydro-demolition to remove remaining concrete to $\frac{3}{4}$ " beneath top layer of reinforcement to ensure bonding between new concrete and existing reinforcement. Use 15lb. hammers near the repair boundaries to prevent damage caused to sound concrete outside of the repair limits.
- 4) Remove damaged reinforcement and install new reinforcement as directed by the Engineer.
- 5) For uncoated steel reinforcing, abrasive blast steel until all rust is removed and steel is clean. Do not abrasive blast coated reinforcing. Restore damaged epoxy coating in accordance with Item 440.3.6.3.
- 6) Create a $\frac{1}{4}$ " surface profile (or conforming to ICRI CSP 9) of concrete surface to remain.
- 7) Pressure wash entire repair area until clean, and continue to pressure wash entire area until concrete within the boundaries achieves saturated surface dry (SSD) condition (at least 15 minutes of pressure washing to all repair surfaces of concrete).
- 8) Remove any standing water within repair limits.
- 9) Obtain approval of the prepared surface by the Engineer before placing concrete.
- 10) Place concrete according to Item 422, "Concrete Superstructures" and allow to cure.



PHOTOS SHOWING LIMITS OF REPAIR


Photos shown are for informational purposes and may not reflect exact site conditions or magnitude of repairs needed. Field verify magnitude of repairs prior to ordering materials.

MATERIAL NOTES

Provide Grade 60 reinforcing steel.
 Provide Class S concrete (f_c = 4,000 psi).
 Alternatively, Type A or D concrete repair materials conforming to DMS-4655 may be used if approved by the Engineer.
 Do not open to traffic until repairs meet a minimum compressive strength of 3,600 psi.

GENERAL NOTES:

Do not damage existing reinforcing. Replace reinforcing steel if more than 25% of the cross sectional area of reinforcing is damaged. Provide laps per Reinforcing Bar Table.
 Perform all concrete repairs in accordance with Item 422, "Concrete Superstructures" and Chapter 3, Section 4 of TxDOT's Concrete Repair Manual. A copy of the Concrete Repair Manual must be available on site during all concrete repair operations.
 See elsewhere in plans for repair locations.



Andrew Mosley, P.E.

06/20/2024

		Bridge Division	
<p>PARTIAL DEPTH DECK REPAIR (ONE TIME USE)</p>			
<p>NBI: 03-252-0256-01-017</p>			
FILE:	DWG: TxDOT	CHK: TxDOT	DWG: TxDOT
©TxDOT February 2024	CONT: 6469	SECT: 86	JOB: SH 25, ETC
REVISIONS	DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO.: 49

DATE: 6/20/2024 4:52:24 PM
 FILE: I:\WFSD\CONTRACTS\MAINTENANCE\CONTRACTS\BPM_FY_25\4 - Design\Plan Set\Graham BPM\9. Environmental\EPIC.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

No Action Required Required Action

Action No.

- The project disturbs less than one acre of surface area. The contractor is responsible for the PSL as defined in the Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges. The total disturbed acreage is the combined acreage to be disturbed on the project and the contractor's PSL.
- Prevent stormwater pollution by controlling erosion and sedimentation to the maximum extent practical. Comply with the SW3P and revise as necessary or as required by the Engineer.
- This EPIC must be updated if the disturbed area increases to one or more acres during the course of construction.
- It may become necessary to post a site notice and/or NOI for the project and/or PSL in a location accessible to the public and TCEQ, EPA, or other inspector if the disturbed area increases to more than 1 acre.

II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required
- Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)
- Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)
- Individual 404 Permit Required
- Other Nationwide Permit Required: NWP# 3a

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

- All channels, streams and draws are considered Waters of the U.S. (WOTUS). Work in WOTUS must comply with general conditions of the Nationwide Permit (NWP).
- Impacts to any waters of the U.S. are limited to the minimum necessary to construct the work.
- This project includes habitat for state and federally listed mussel species. A mussel survey is required at specific locations before channel excavation or riprap can be placed below the ordinary high water mark.
- Products of debris removal and channel excavation needs to be stored at an upland location.
- Equipment should not be placed in the channel.
- When temporary stream crossings are unavoidable, remove stream crossings once they are no longer needed and stabilize banks and soils around the crossing.
- If dewatering activities are necessary, the contractor would coordinate with the TPWD Kills and Spills Team (KAST) to obtain necessary permits. Contact Bregan Brown TPWD Region 2 KAST, by phone at (903)566-2518, Adam Whisenant TPWD Region 2 KAST, by phone at (903)566-8387 or call the 24-hour phone line at (512) 389-4848. The permitting process requires at least one month.
- This project includes habitat for state listed mussel species. A mussel survey is required at specific locations before temporary crossings of riprap can be placed below the ordinary high water mark.

The elevation of the ordinary high water marks of any areas requiring work to be performed in the waters of the US requiring the use of a nationwide permit can be found on the Bridge Layouts.

III. CULTURAL RESOURCES

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

No Action Required Required Action

Action No.

- If burial remains and/or artifacts are discovered cease work and contact the WFS District ENV Coordinator. If discovered, tribes request immediate notification by TxDOT.
- No impacts off right-of-way are permitted without coordinating with the DEQC and/or EC.

IV. VEGETATION RESOURCES

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

No Action Required Required Action

Action No.

- Vegetation disturbances should be limited to the minimum necessary to complete the work.
- Prior to impacting trees and shrubs check for birds, bees, bats and other wildlife.
- Re-vegetation of disturbed areas shall be done in accordance with TxDOT's standard practices for rural areas in compliance with the Executive Memorandum on Beneficial Landscaping.

V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.

No Action Required Required Action

Action No.

- Bird BMPs: Migratory birds may arrive in the project area to breed during construction of the proposed project. Per the Migratory Bird Treaty Act (MBTA), measures would be taken to avoid disturbing or killing of migratory birds. Prior to construction, perform daytime surveys for nests including under bridges and in culverts to determine if they are active before removal. Nests that are active should not be disturbed. Do not disturb, destroy, or remove active nests, including ground nesting birds, during the nesting season, March through August. Avoid the removal of unoccupied, inactive nests, as practicable. Prevent the establishment of active nests prior to nesting season on TxDOT owned and operated facilities and structures proposed for replacement or repair. Do not collect, capture, relocate, or transport birds, eggs, young, or active nests without a permit.
- Amphibian and Aquatic Reptile BMPs: Contractors will be advised of potential occurrence of the Woodhouse's Toad and Strecker's chorus frog in the project area, and to avoid harming them if encountered. Project specific locations (PSLs) within state-owned ROW should be located in uplands away from aquatic features. Where work is directly adjacent to the water, minimize impacts to shoreline where feasible.
- Bat BMPs: In all instances, avoid harm to bats. If bats are encountered during construction stop work in the area and contact district environmental coordinator (Nellie Bennett) at 940-720-7733. Bats should only be handled as a last resort and after communication with TPWD.
- Terrestrial Reptile BMPs: Visually inspect excavation areas for trapped wildlife prior to backfilling. Inform contractors that if reptiles are found on project site, allow species to safely leave the project area.

LIST OF ABBREVIATIONS

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES

General (applies to all projects):
 Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labelling as required by the Act.

Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

Contact the Engineer if any of the following are detected:

- * Dead or distressed vegetation (not identified as normal)
- * Trash piles, drums, canister, barrels, etc.
- * Undesirable smells or odors
- * Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

Yes No

If "No", then no further action is required.

If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

Yes No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

No Action Required Required Action

- If sheen of other contamination is visible in the waters of the US, or on the project site, the site shall be immediately cleaned up in accordance with local, state, and federal regulations.

VII. OTHER ENVIRONMENTAL ISSUES

(includes regional issues such as Edwards Aquifer District, etc.)

No Action Required Required Action

Action No.


- Keep noise to a minimum. Reduce idling of vehicles and equipment.
- Maintain project site. Minimize dust and airborne particles to the maximum extent practical.
- Collect sanitary waste in accordance with local regulations by a sanitary waste collector. Portable units shall not be placed near a waterway or drainage area.
- Collect all waste materials, trash, and debris from the construction site daily and deposit into a metal dumpster having a secure cover.
- TxDOT EMS Policy Statement (English & Spanish) should be displayed at the construction site.

		Design Division Standard	
ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS EPIC			
FILE: epic.dgn	DN: TxDOT	CK: RG	DW: VP
©TxDOT: February 2015	CONT	SECT	HIGHWAY
12-12-2011 IDS REVISIONS	6469	86	001
05-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY	SHEET NO.
01-23-2015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	WFS	ARCHER, ETC	50

DATE: 6/20/2024 4:52:25 PM
 FILE: T:\WFS\DESIGN\PLANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM9. Environmental\TYPICAL SW3P LAYOUT.dgn

DWG: CJK
 DATE: CJK
 CHK: CJK

NOTES:
 CONTRACTOR SHALL LIST INSTALL DATES AND REMOVE DATES ON BMP PLACEMENT LIST BELOW.
 QUANTITIES ARE BASED ON TYPICAL LAYOUT SHOWN. PLACEMENT OF BMP'S SHOWN IS FOR ILLUSTRATIVE PURPOSES ONLY. SEEK ENGINEER'S APPROVAL FOR PROPER PLACEMENT.

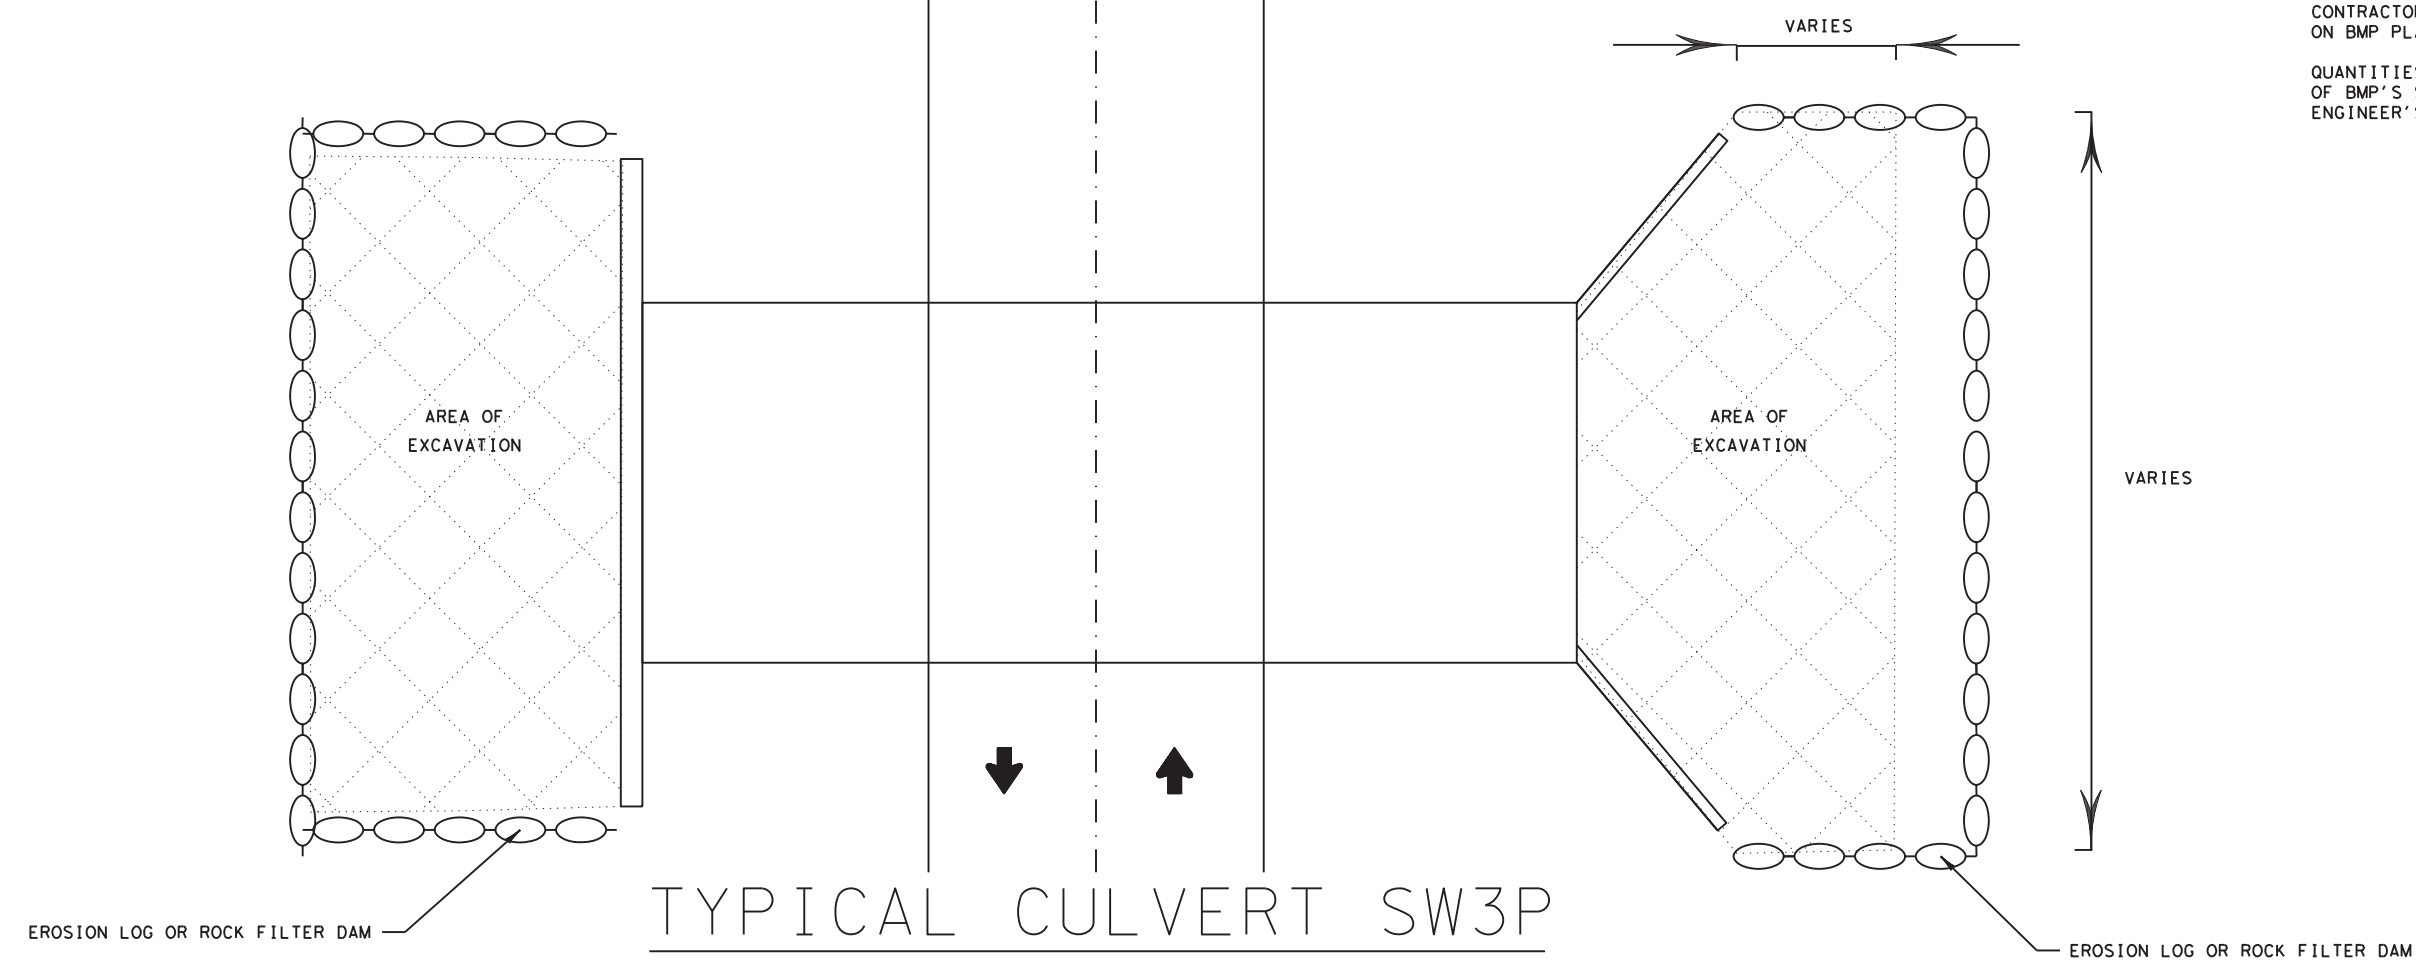

REFERENCE NO.	BMP PLACEMENT - UPSTREAM END					
	DATE INSTALLED	DATE DISTURBED	DATE MAINTAINED	DATE REPLACED	DATE STABILIZED	DATE REMOVED
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

REFERENCE NO.	BMP PLACEMENT - DOWNSTREAM END					
	DATE INSTALLED	DATE DISTURBED	DATE MAINTAINED	DATE REPLACED	DATE STABILIZED	DATE REMOVED
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

NOT TO SCALE




Andrew Mosley, P.E.
 06/20/2024

SH 25, ETC
 TYPICAL SW3P
 LAYOUT




CONT	SECT	JOB	HIGHWAY
6469	86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.	
WFS	ARCHER, ETC	51	

DATE: 6/20/2024
 FILE: T:\WF\DESIGN\PIANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\9. Environmental\EC(2)-16.dgn
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

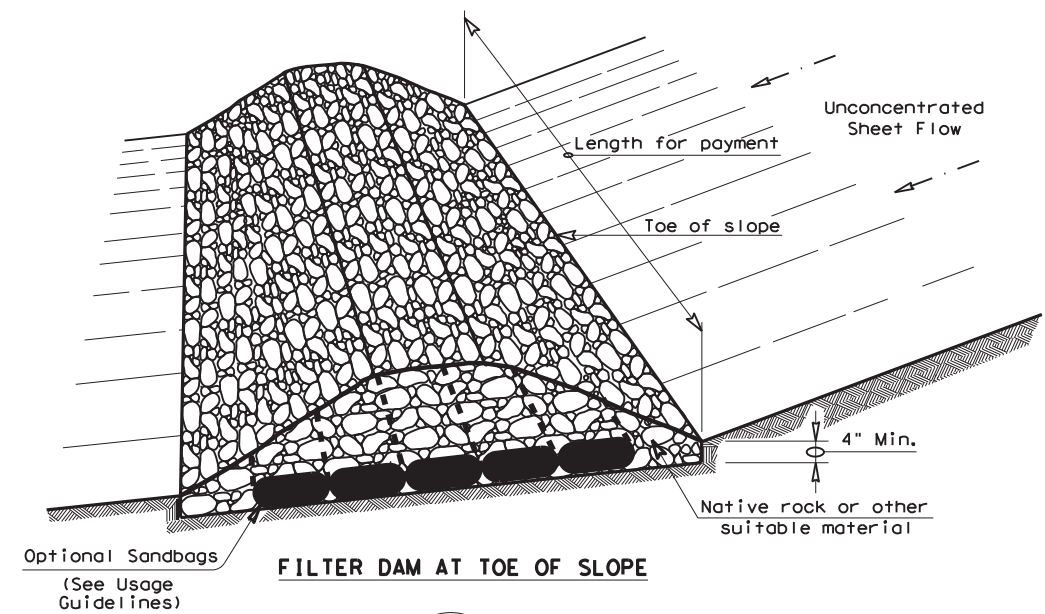


FILTER DAM AT TOE OF SLOPE

(RFD1)

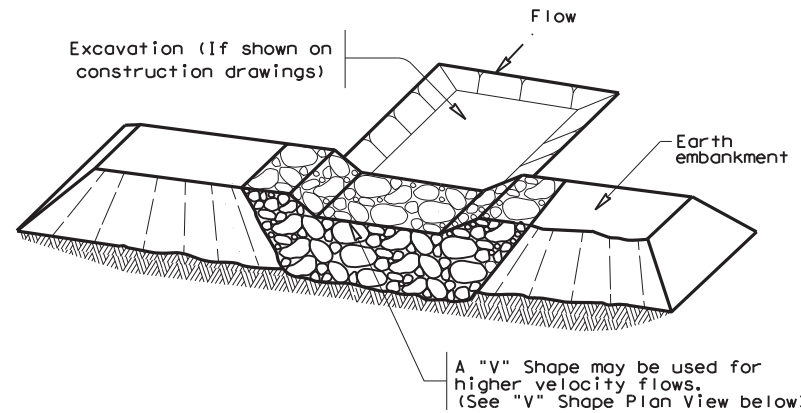


FILTER DAM AT SEDIMENT TRAP

(RFD1) OR (RFD2)

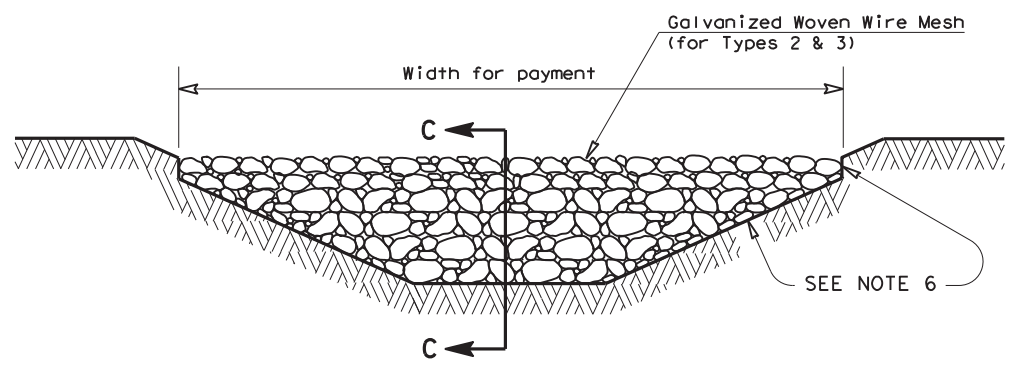


FILTER DAM AT CHANNEL SECTIONS


(RFD1) OR (RFD2) OR (RFD3)

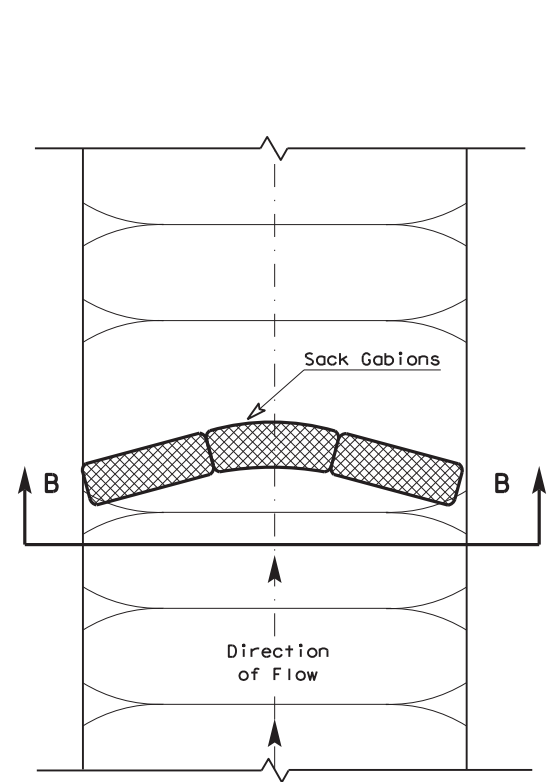


PLAN VIEW

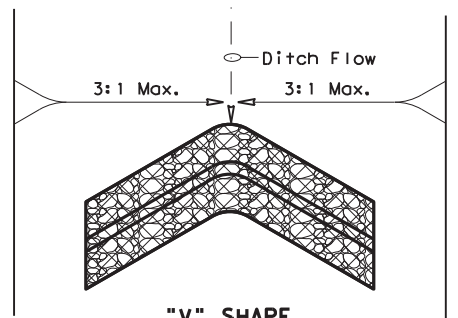


"V" SHAPE PLAN VIEW

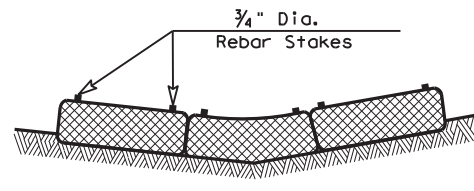

SECTION B-B

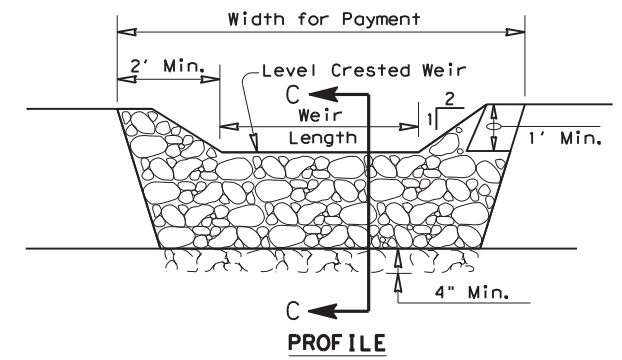

PROFILE

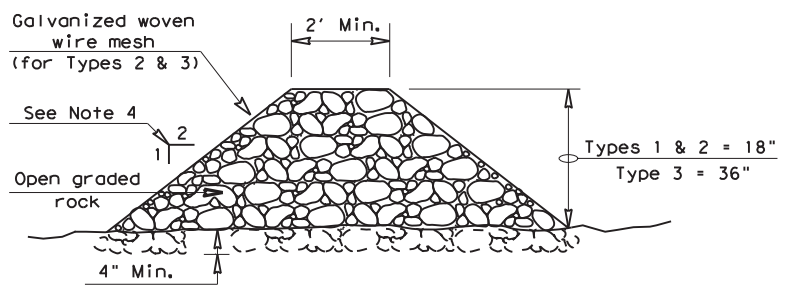

SECTION C-C

ROCK FILTER DAM USAGE GUIDELINES

Rock Filter Dams should be constructed downstream from disturbed areas to intercept sediment from overland runoff and/or concentrated flow. The dams should be sized to filter a maximum flow through rate of 60 GPM/FT² of cross sectional area. A 2 year storm frequency may be used to calculate the flow rate.

Type 1 (18" high with no wire mesh) (3" to 6" aggregate): Type 1 may be used at the toe of slopes, around inlets, in small ditches, and at dike or swale outlets. This type of dam is recommended to control erosion from a drainage area of 5 acres or less. Type 1 may not be used in concentrated high velocity flows (approximately 8 Ft/Sec or more) in which aggregate wash out may occur. Sandbags may be used at the embedded foundation (4" deep min.) for better filtering efficiency of low flows if called for on the plans or directed by the Engineer.

Type 2 (18" high with wire mesh) (3" to 6" aggregate): Type 2 may be used in ditches and at dike or swale outlets.

Type 3 (36" high with wire mesh) (4" to 8" aggregate): Type 3 may be used in stream flow and should be secured to the stream bed.

Type 4 (Sack gabions) (3" to 6" aggregate): Type 4 May be used in ditches and smaller channels to form an erosion control dam.


Type 5: Provide rock filter dams as shown on plans.

GENERAL NOTES

1. If shown on the plans or directed by the Engineer, filter dams should be placed near the toe of slopes where erosion is anticipated, upstream and/or downstream at drainage structures, and in roadway ditches and channels to collect sediment.
2. Materials (aggregate, wire mesh, sandbags, etc.) shall be as indicated by the specification for "Rock Filter Dams for Erosion and Sedimentation Control".
3. The rock filter dam dimensions shall be as indicated on the SW3P plans.
4. Side slopes should be 2:1 or flatter. Dams within the safety zone shall have sideslopes of 6:1 or flatter.
5. Maintain a minimum of 1' between top of rock filter dam weir and top of embankment for filter dams at sediment traps.
6. Filter dams should be embedded a minimum of 4" into existing ground.
7. The sediment trap for ponding of sediment laden runoff shall be of the dimensions shown on the plans.
8. Rock filter dam types 2 & 3 shall be secured with 20 gauge galvanized woven wire mesh with 1" diameter hexagonal openings. The aggregate shall be placed on the mesh to the height & slopes specified. The mesh shall be folded at the upstream side over the aggregate and tightly secured to itself on the downstream side using wire ties or hog rings. For in stream use, the mesh should be secured or staked to the stream bed prior to aggregate placement.
9. Sack Gabions should be staked down with 3/4" dia. rebar stakes, and have a double-twisted hexagonal weave with a nominal mesh opening of 2 1/2" x 3 1/4"
10. Flow outlet should be onto a stabilized area (vegetation, rock, etc.).
11. The guidelines shown hereon are suggestions only and may be modified by the Engineer.


PLAN SHEET LEGEND

- Type 1 Rock Filter Dam (RFD1)
- Type 2 Rock Filter Dam (RFD2)
- Type 3 Rock Filter Dam (RFD3)
- Type 4 Rock Filter Dam (RFD4)

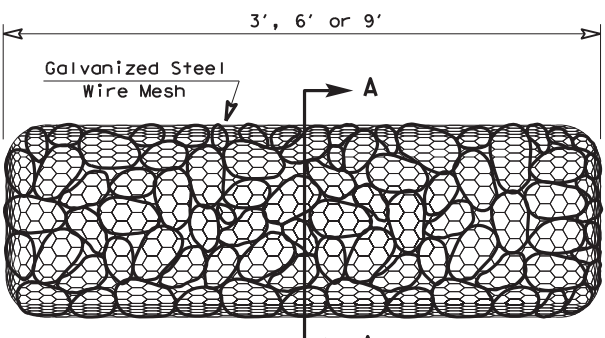

TYPE 4 (SACK GABIONS)

(RFD4)

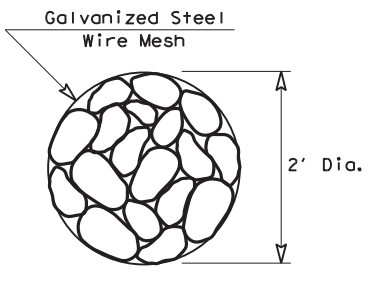


SECTION A-A


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES ROCK FILTER DAMS EC(2)-16			
FILE: ec216	DN: TxDOT	CK: KM	DW: VP
© TxDOT: JULY 2016	CONT: 6469	SECT: 86	JOB: 001
REVISIONS		SH 25, ETC	
DIST: WFS	COUNTY: ARCHER, ETC	SHEET NO. 52	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 6/20/2024
 FILE: T:\WF\DESIGN\PIANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM9. Environmental\EC(9)-16 .dgn

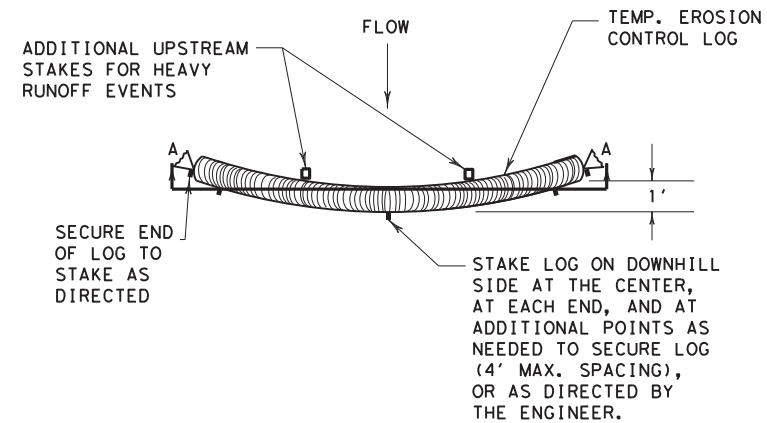

PLAN VIEW

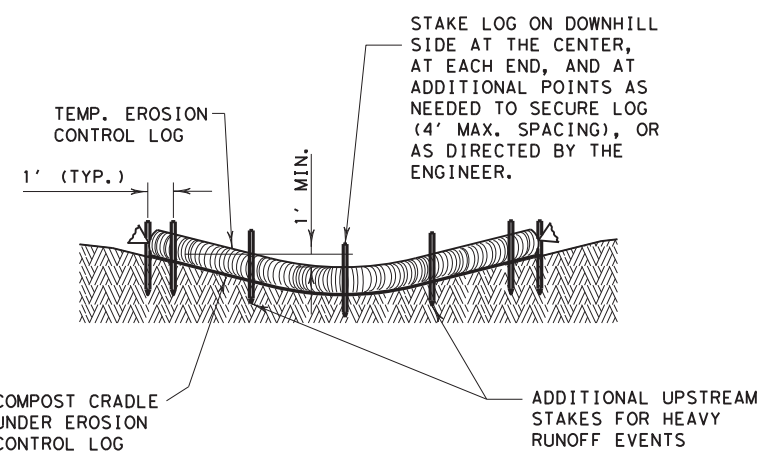


SECTION A-A
EROSION CONTROL LOG DAM


CL-D

LEGEND

- CL-D EROSION CONTROL LOG DAM
- CL-BOC EROSION CONTROL LOG AT BACK OF CURB
- CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
- CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
- CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
- CL-DI EROSION CONTROL LOG AT DROP INLET
- CL-CI EROSION CONTROL LOG AT CURB INLET
- CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET

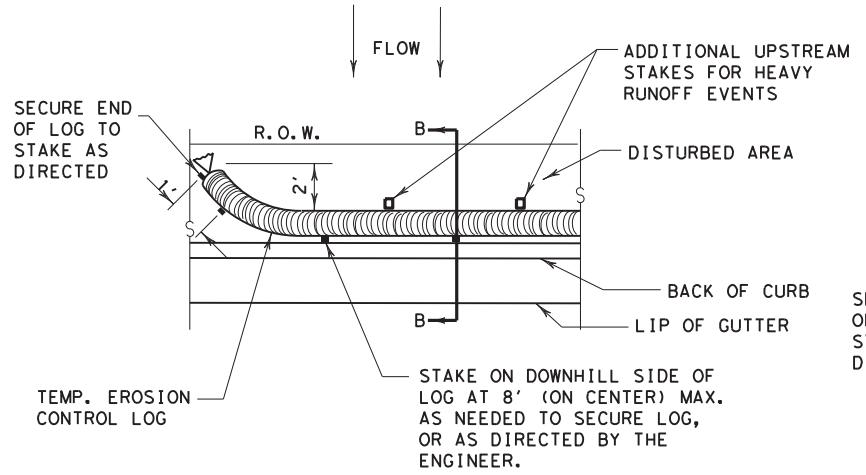


PLAN VIEW

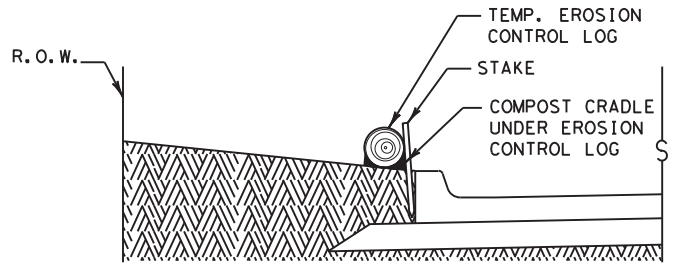


SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB


CL-BOC



REBAR STAKE DETAIL

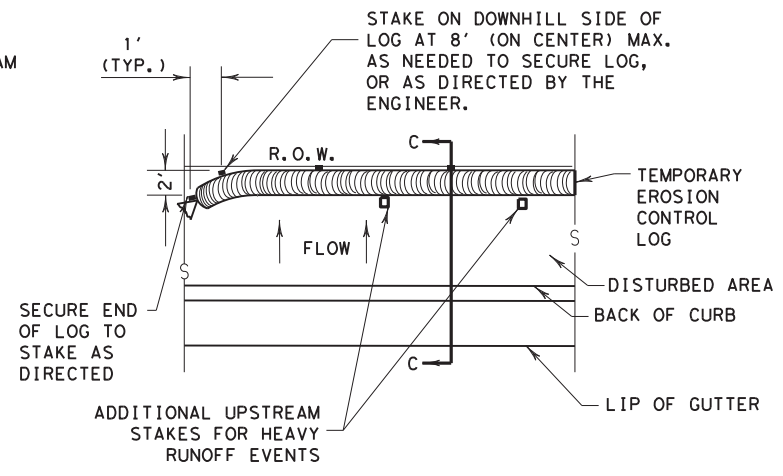


PLAN VIEW

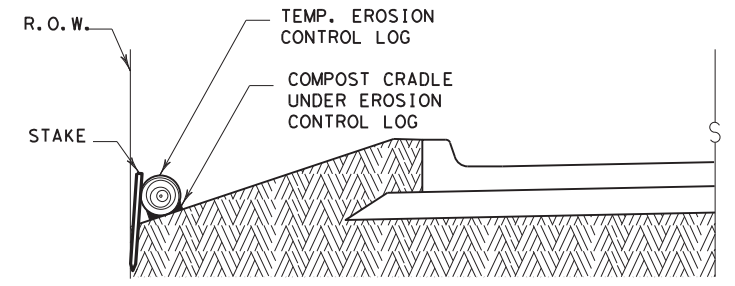

SECTION C-C

EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

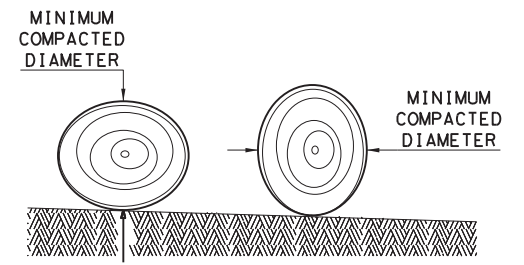

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

SEDIMENT BASIN & TRAP USAGE GUIDELINES

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

Log Traps: The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.


GENERAL NOTES:

1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3


		<i>Design Division Standard</i>	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES			
EROSION CONTROL LOG			
EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	6469	86	001
	DIST	COUNTY	SHEET NO.
	WFS	ARCHER, ETC	53

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.
 DATE: 6/20/2024
 FILE: T:\WFSD\ESGN\PIans\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\9. Environmental\EC(9)-16.dgn

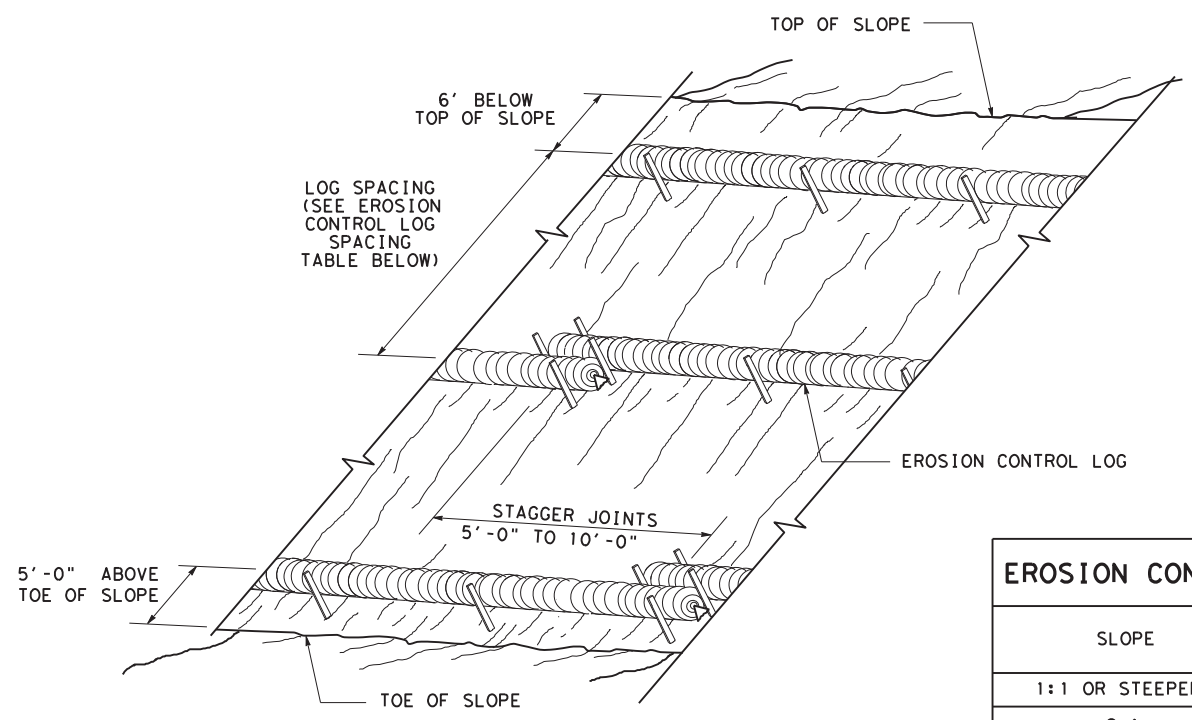

**EROSION CONTROL LOGS ON SLOPES
STAKE AND TRENCHING ANCHORING**


CL-SST

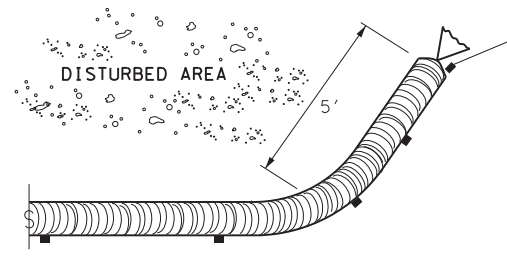

END SECTION RAP DETAIL


SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:
 SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;
 HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

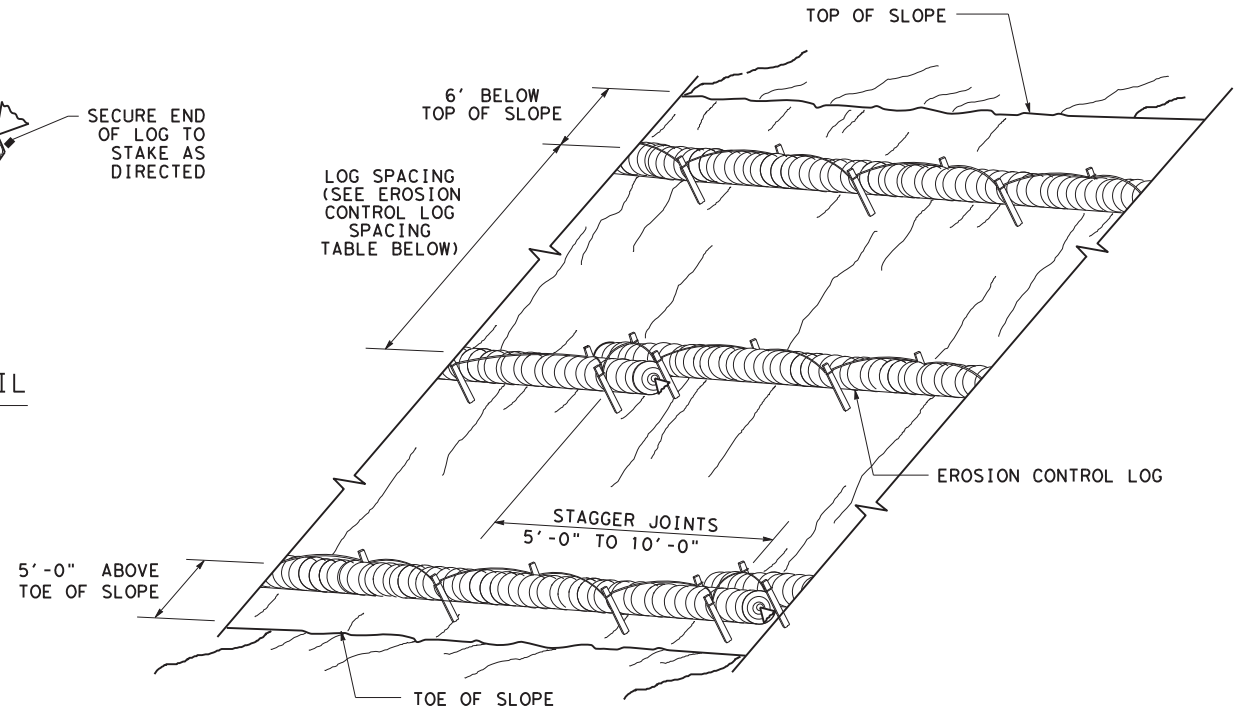


**EROSION CONTROL LOGS ON SLOPES
STAKE AND LASHING ANCHORING**

CL-SSL

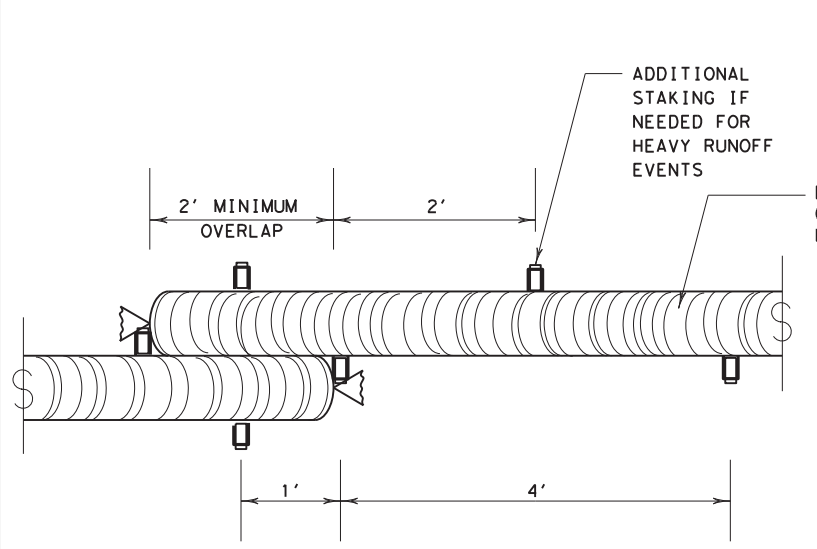

STAKE AND TRENCHING ANCHORING DETAIL


CL-SST

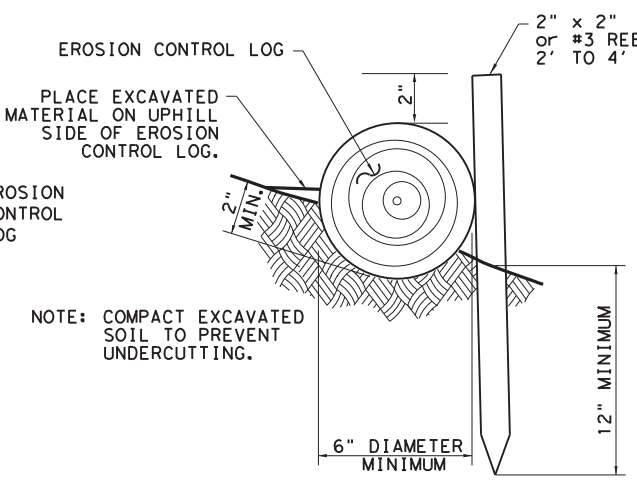


STAKE AND LASHING ANCHORING DETAIL

CL-SSL

LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"




STAKE NOTCH DETAIL

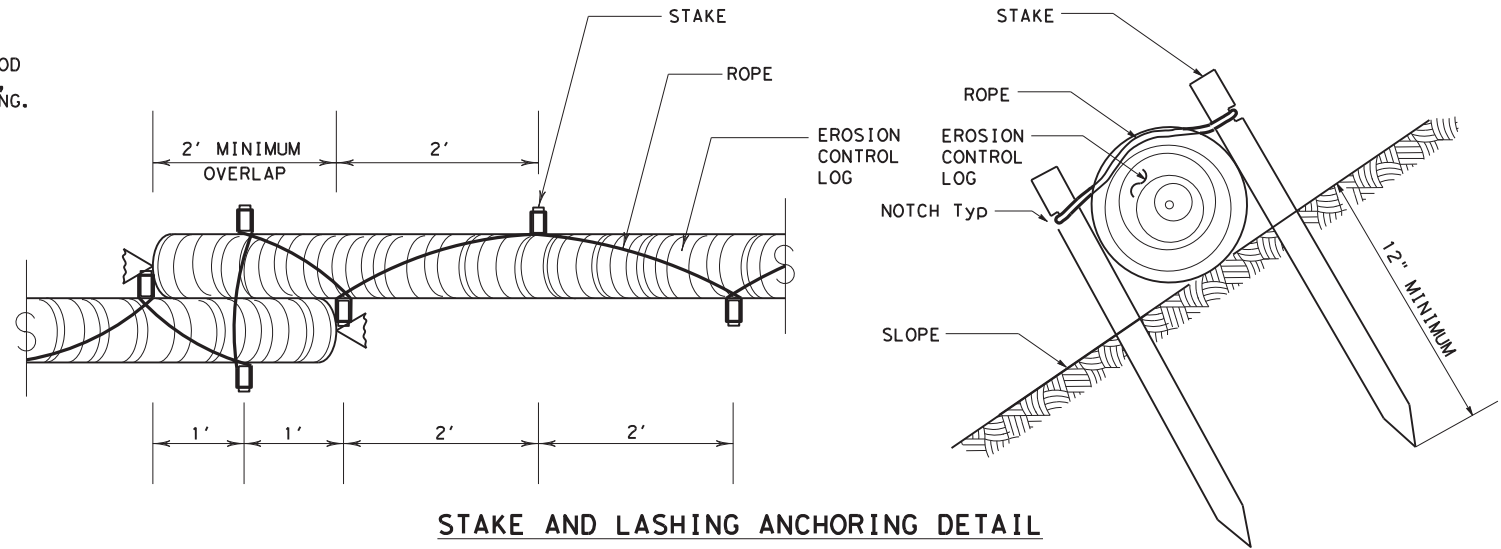

SHEET 2 OF 3


		Design Division Standard	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC(9) - 16			
FILE: ec116	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	6469 86	001	SH 25, ETC
DIST	COUNTY	SHEET NO.	
WFS	ARCHER, ETC	54	

DATE: 6/20/2024
 FILE: T:\WFSD\EGN\PIANS\MAINTENANCE CONTRACTS\BPM FY 25\4 - Design\Plan Set\Graham BPM\9. Environmental\EC(9)-16 .dgn
 DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

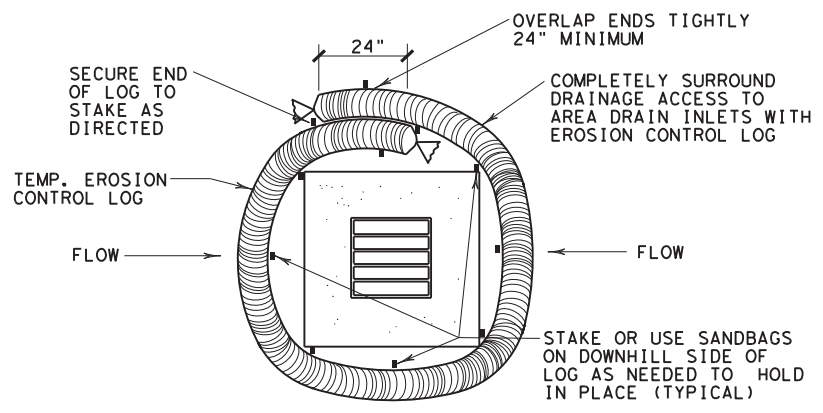


EROSION CONTROL LOG AT DROP INLET

CL-DI

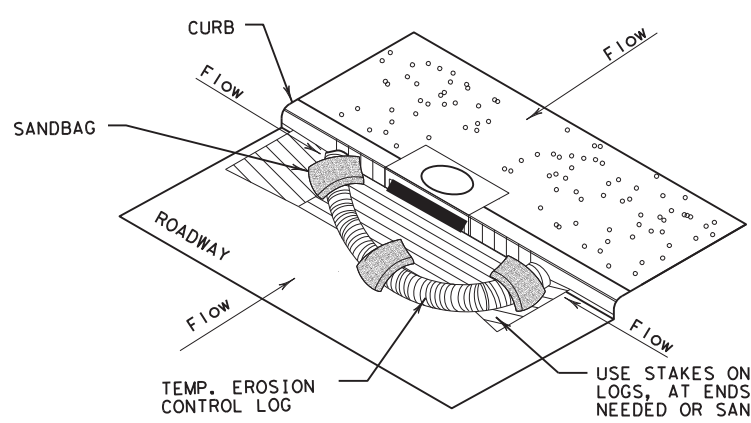

EROSION CONTROL LOG AT CURB INLET


CL-CI

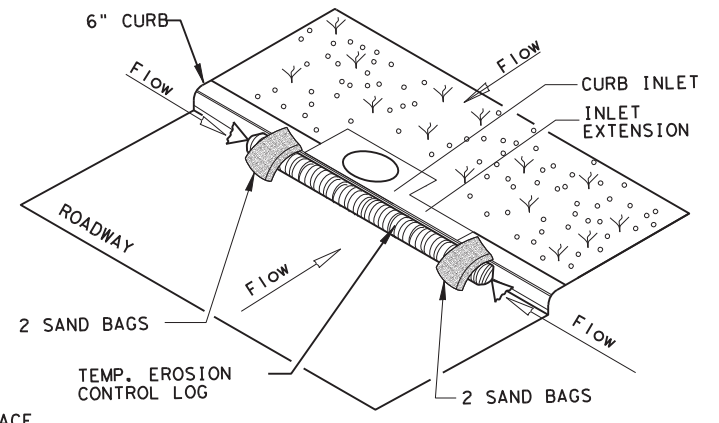

EROSION CONTROL LOG AT CURB INLET


CL-CI

NOTE:
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

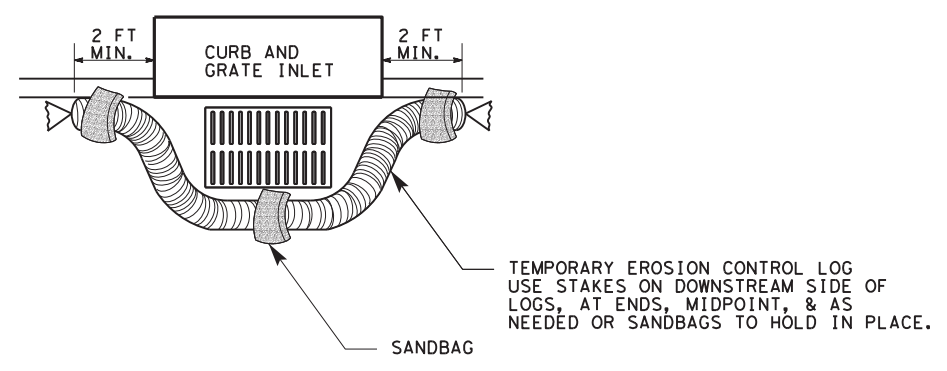

EROSION CONTROL LOG AT CURB & GRADE INLET

CL-GI

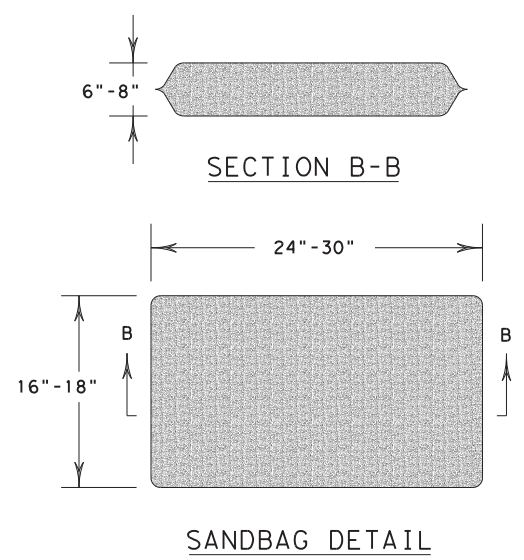


SHEET 3 OF 3

		<i>Design Division Standard</i>	
TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES EROSION CONTROL LOG EC (9) - 16			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	6469	86	001
DIST	COUNTY		SHEET NO.
WFS	ARCHER, ETC		55

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

6/20/2024 4:52:36 PM
T:\WFSD\EGN\Plans\WFS_Standards\VDGNS\Maintenance\TRB-15(1)_.dgn


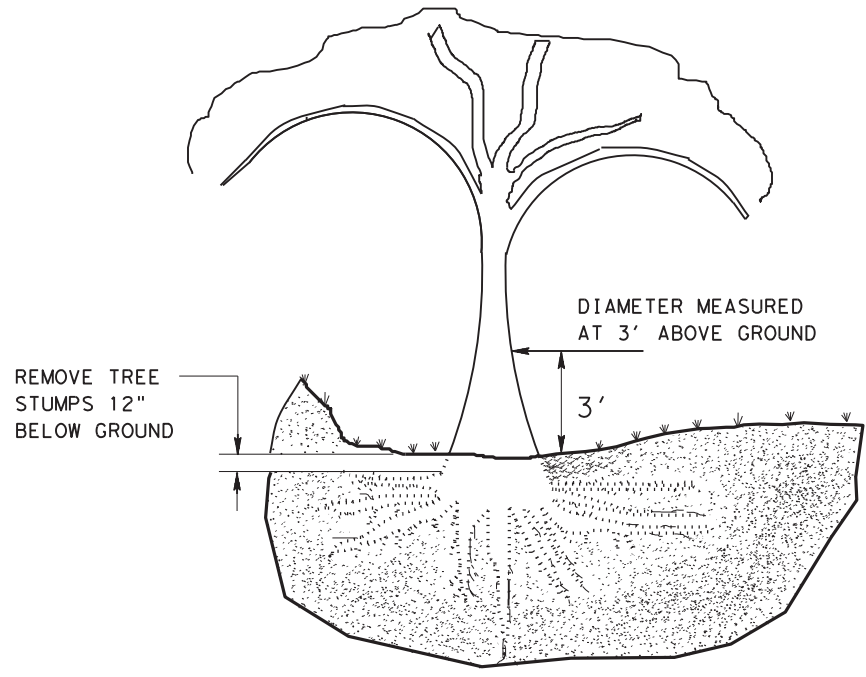


TREE REMOVAL

STEP 1:
CUT 1/3 WAY THROUGH BOTTOM OF LIMB 8" TO 12" ABOVE MAIN STEM (OR TRUNK).


STEP 2:
REMOVE LIMB 4" TO 6" BEYOND THE FIRST CUT

STEP 3:
REMOVE STUB WITH A SMOOTH CUT SO THAT TRACE COLLAR OF THE REMOVED LIMB PROTRUDES APPROXIMATELY 1/2" FROM THE MAIN STEM

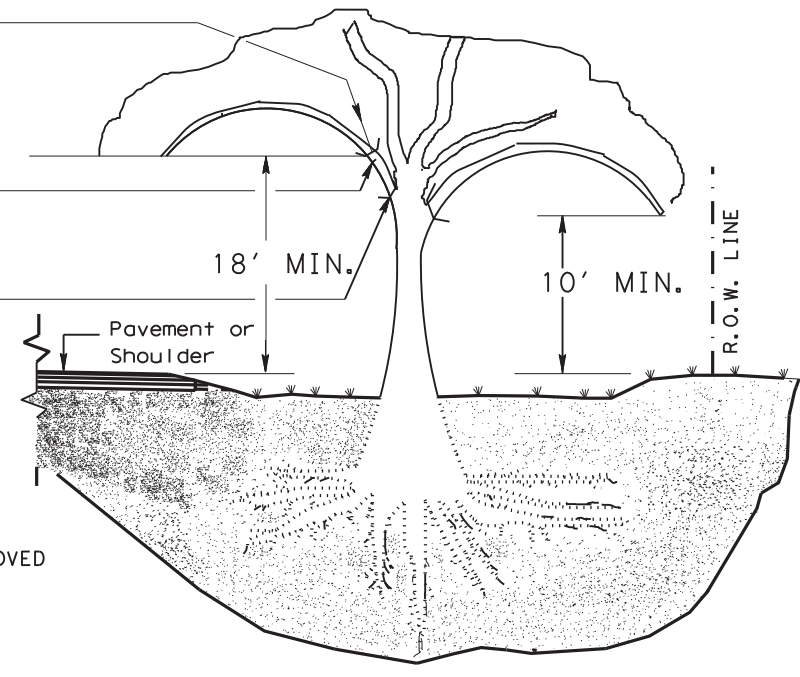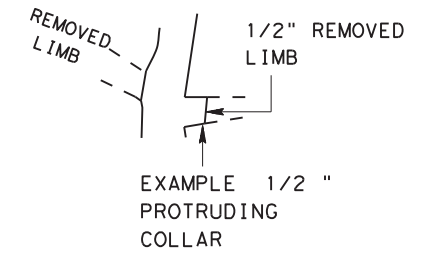


TREE TRIMMING

SUCKERS ARE SMALL BRANCHES THAT OCCUR BENEATH MAIN BRANCHES. REMOVE SUCKERS TO HEIGHT OF THE LOWEST MAIN BRANCH

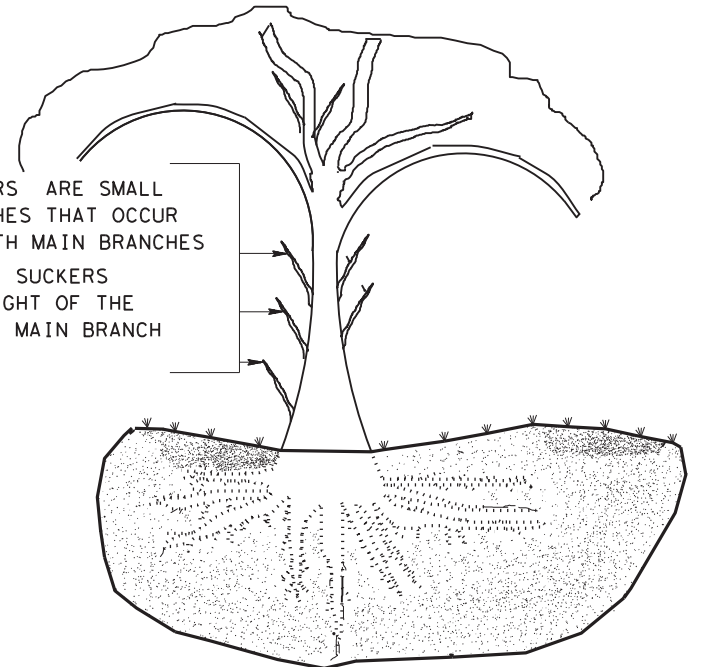

STEPS 1, 2 AND 3 APPLY WHEN REMOVING LIMBS 2" IN DIAMETER OR LARGER.

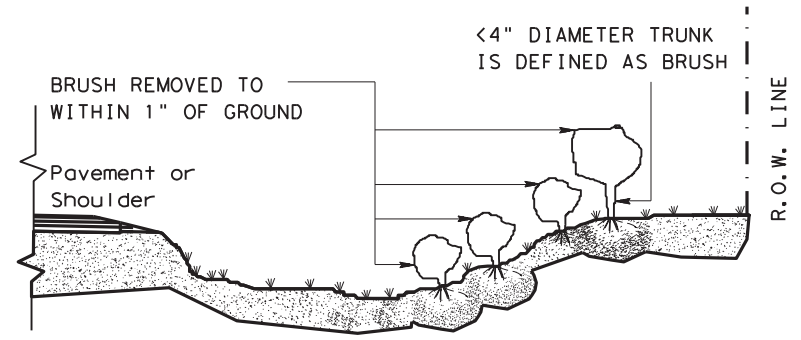

BRUSH REMOVAL

GENERAL NOTES:

TREE TRIMMING


1. TRIM AND REMOVE ALL TREE LIMBS ON THE PAVEMENT SIDE OF THE TRUNK 18' ABOVE THE PAVEMENT OR BRIDGE DECK ELEVATION, UNLESS OTHERWISE SHOWN ON THE PLANS.
2. TRIM AND REMOVE ALL TREE LIMBS BETWEEN THE TRUNK AND R.O.W. LINE 10' ABOVE NATURAL GROUND, TERRAIN OR OTHER STRUCTURE ELEVATION, UNLESS OTHERWISE SHOWN ON THE PLANS.

TREE REMOVAL

3. FOR TREES MARKED FOR REMOVAL, THE DIAMETER OF TREES ARE DETERMINED BY MEASUREMENT OF THE TRUNK CIRCUMFERENCE 3' ABOVE THE GROUND. TREES WITH TRUNKS OF LESS THAN 4" DIAMETER ARE CONSIDERED TO BE BRUSH. TREES WITH MULTIPLE TRUNKS AT THE POINT OF MEASUREMENT ARE MEASURED AND PAID FOR SEPARATELY.
4. MEASUREMENTS FOR PAYMENT OF TREE DIAMETERS ARE DIVIDED INTO THE RANGES SHOWN IN TABLE 1.

PAY ITEM	RANGE FOR PAY ITEMS			
	TRUNK DIAMETER *		TRUNK CIRCUMFERENCE	
	LOWER LIMIT IS GREATER THAN	UPPER LIMIT IS LESS THAN OR EQUAL TO	LOWER LIMIT IS GREATER THAN	UPPER LIMIT IS LESS THAN OR EQUAL TO
752 6005	4	12	12 1/2	37 1/2
752 6006	12	18	37 1/2	56 1/2
752 6007	18	24	56 1/2	75 1/2
752 6008	24	30	75 1/2	94
752 6009	30	36	94	113
752 6010	36	42	113	132
752 6011	42	48	132	151
752 6012	48	60	151	188 1/2
752 6013	60	72	188 1/2	226
752 6019	72	84	226	264
	84	GREATER THAN 84	264	NOT APPLICABLE

*SEE GENERAL NOTE #3.




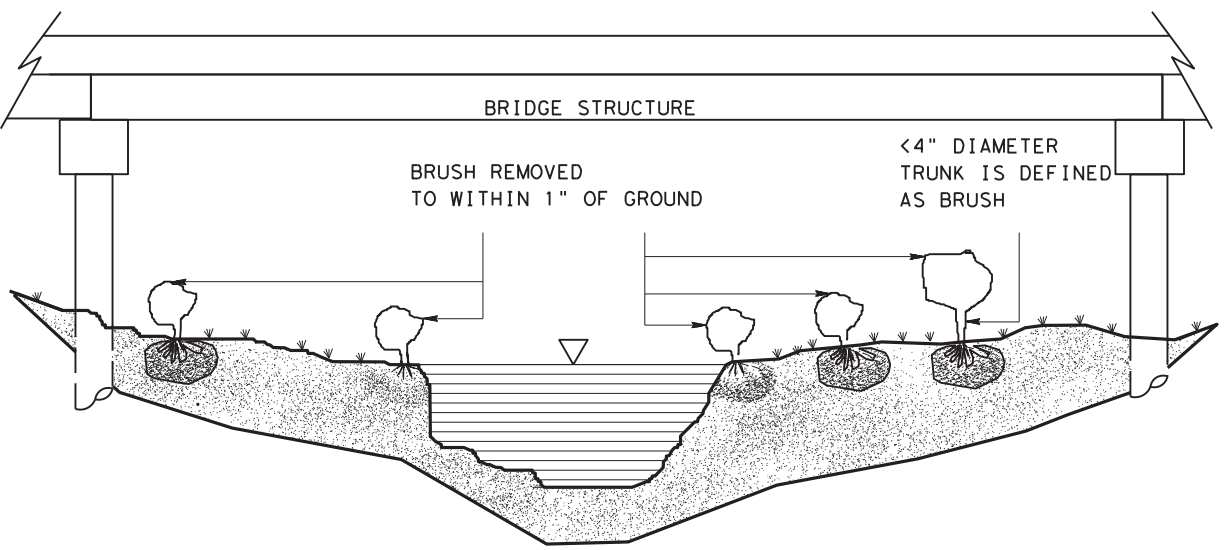


BRUSH REMOVAL UNDER BRIDGE AND IN CHANNEL




TREE AND BRUSH REMOVAL
TRB-15(1)

FILE:	DW: JEO	CK: LJB	DW: JEO	CK:
© TxDOT MARCH 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
Revised table 1 to 2014 Specification	DIST	COUNTY	SHEET NO.	
	WFS	ARCHER, ETC	56	

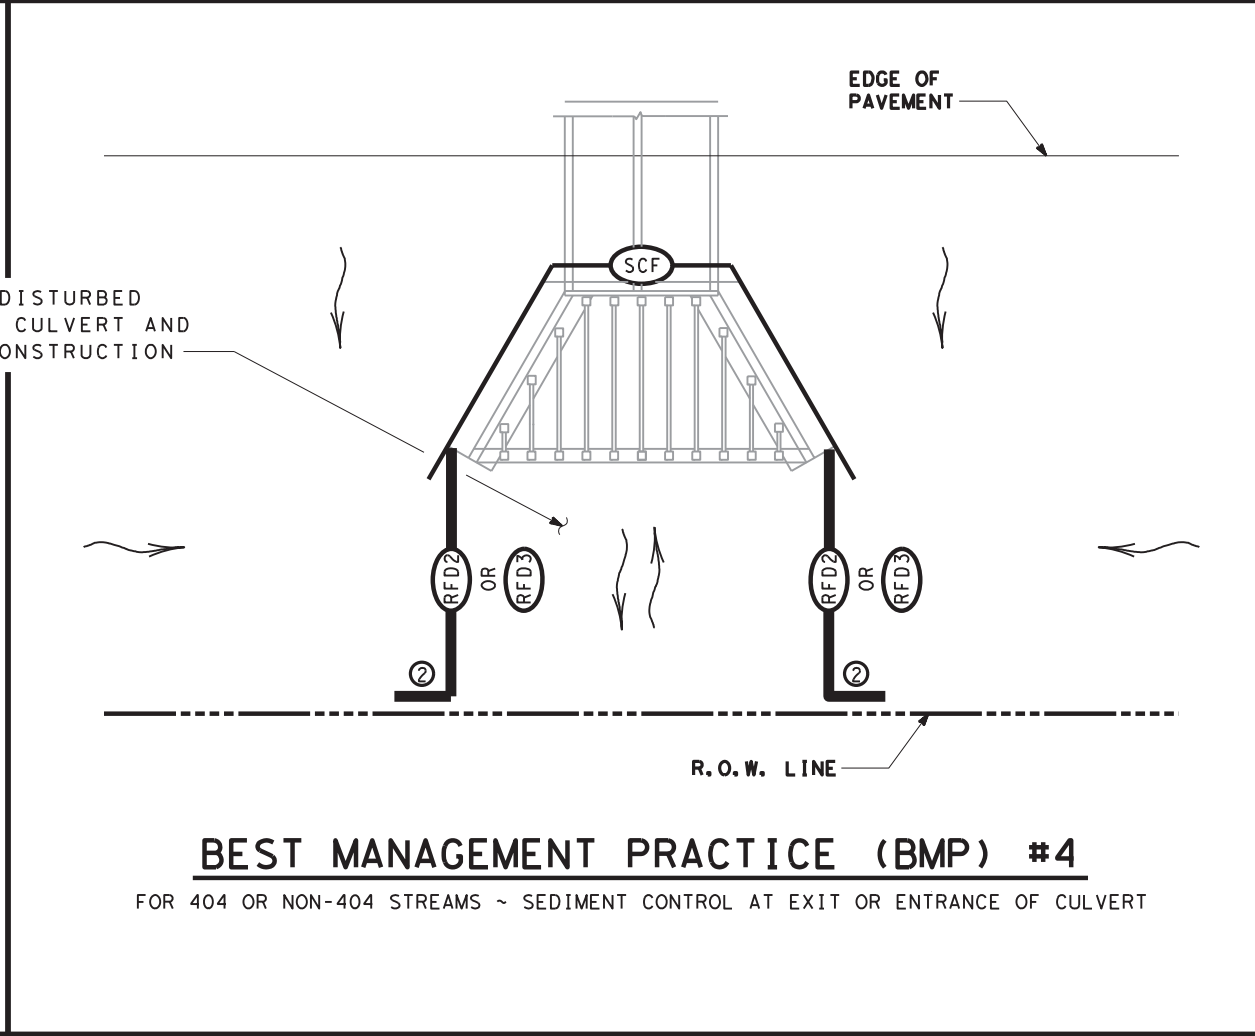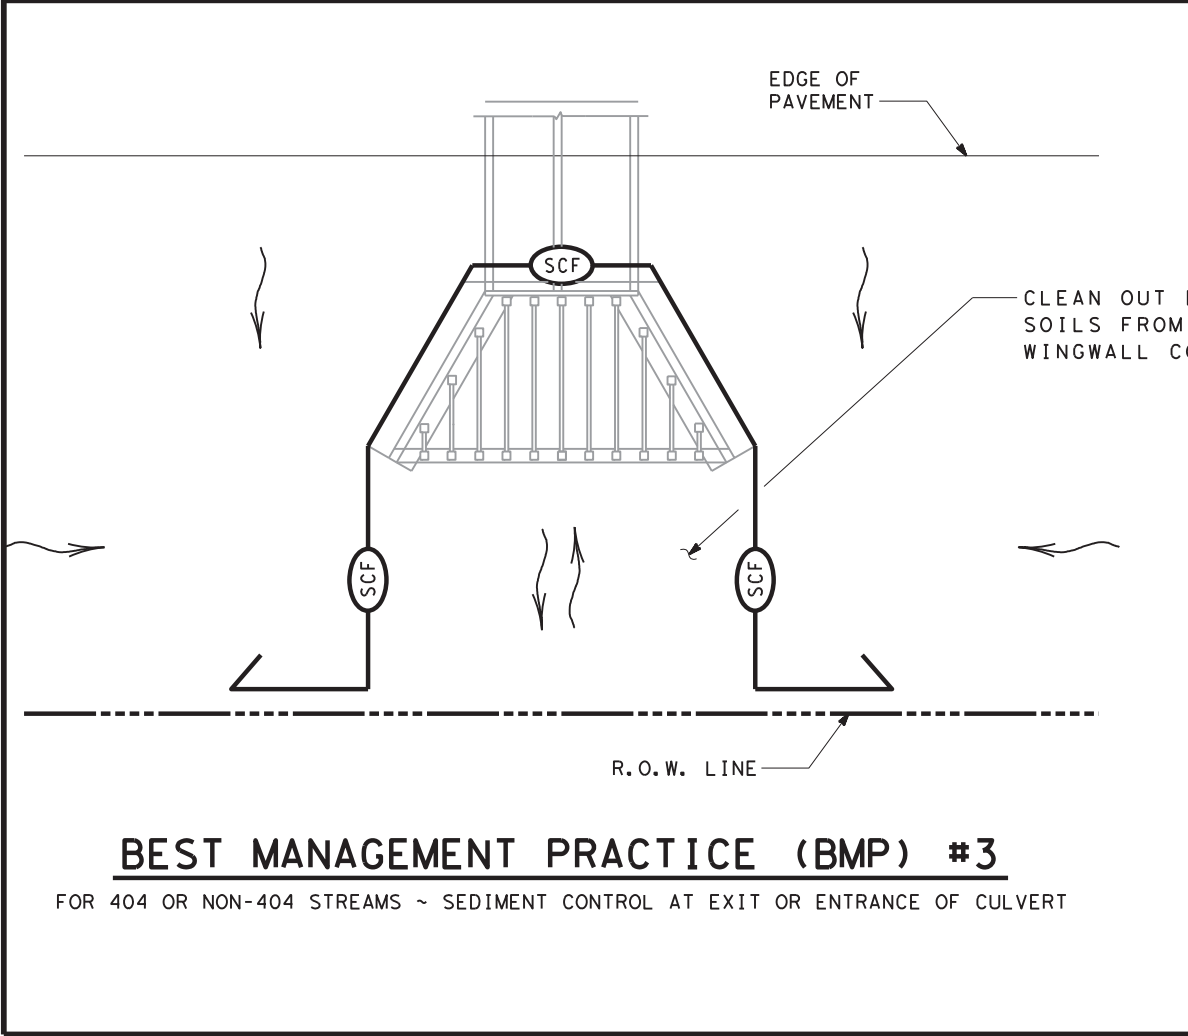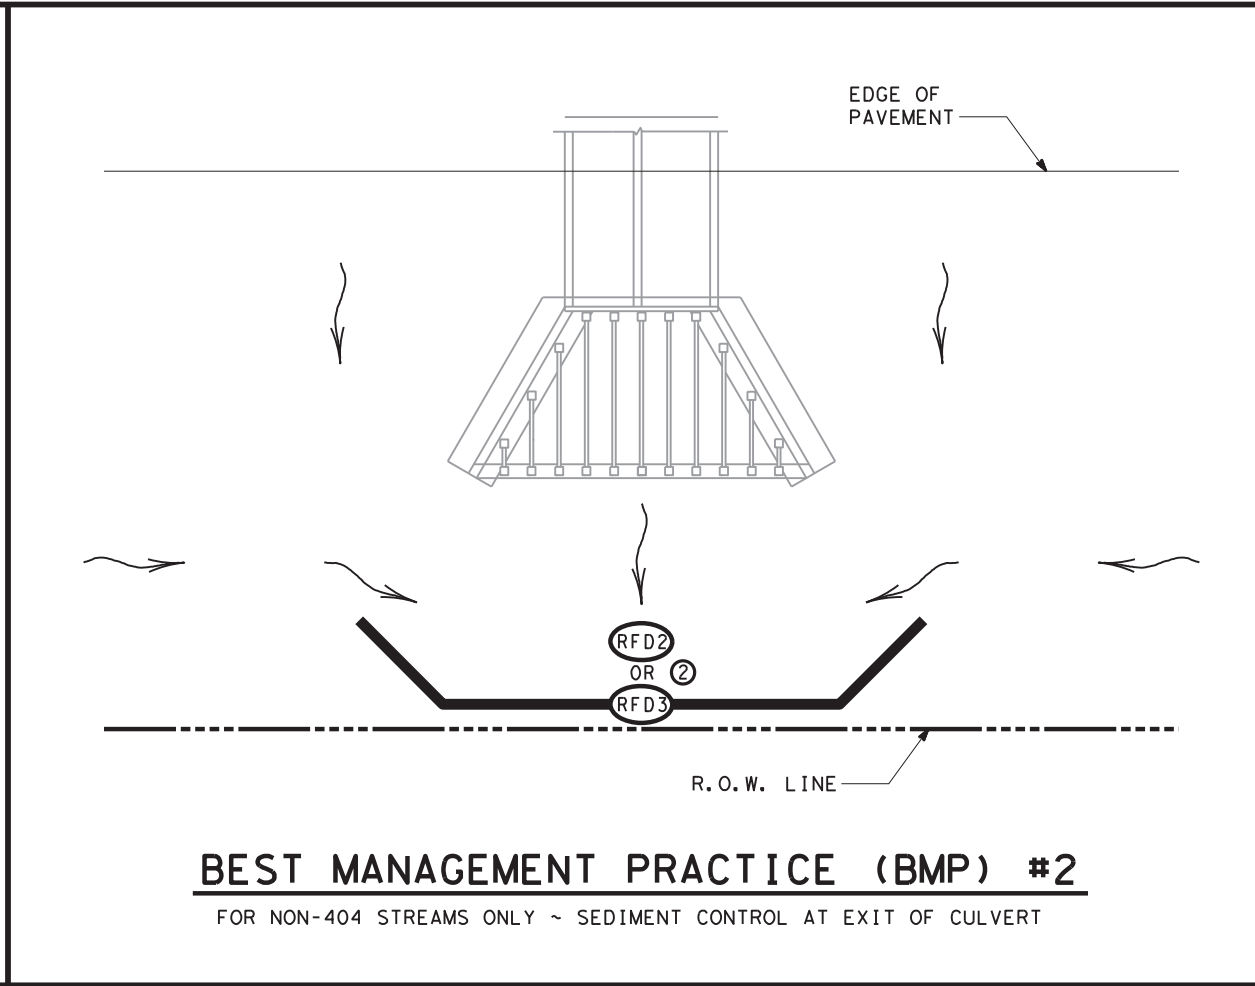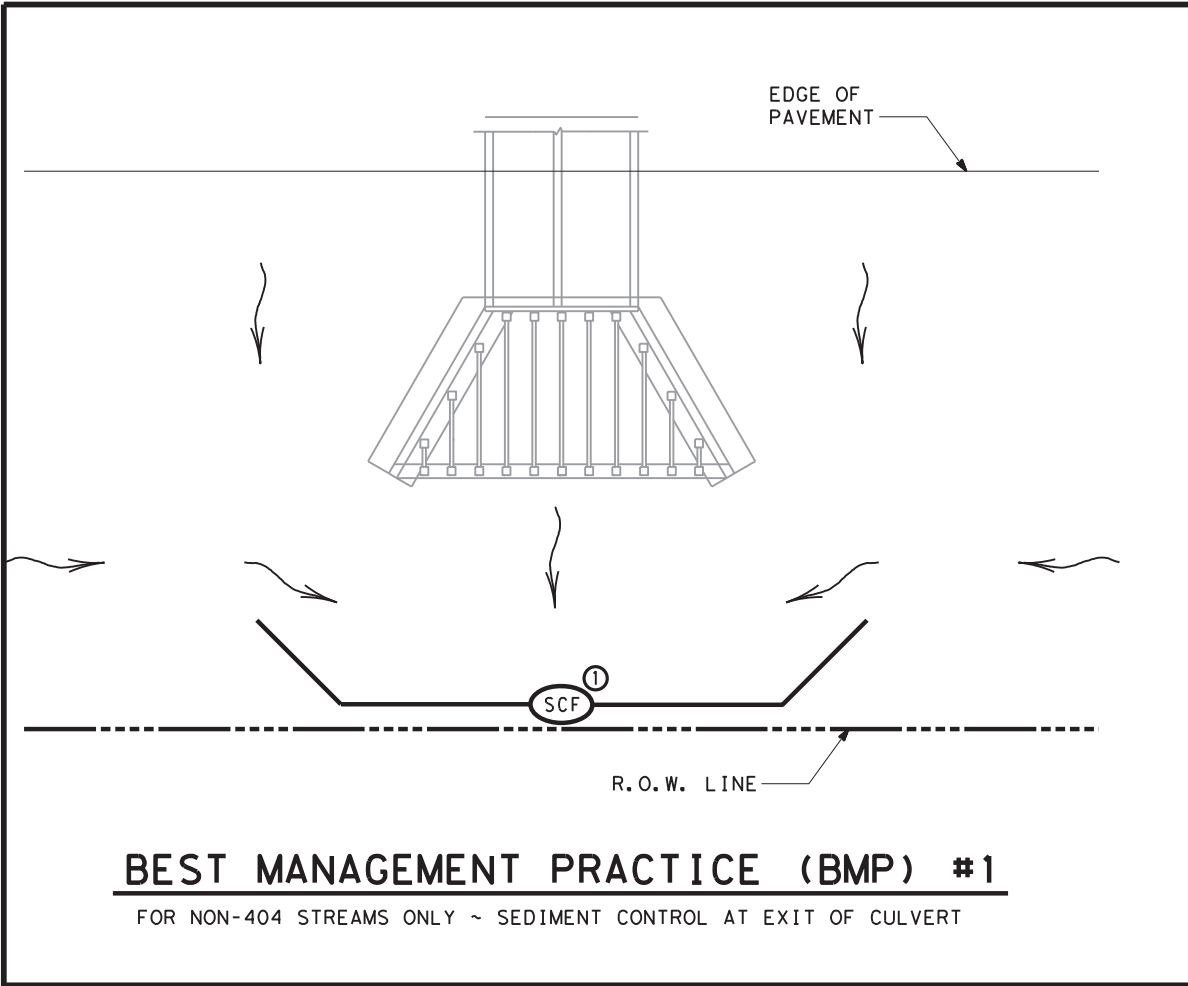

	SEDIMENT CONTROL FENCE
	ROCK FILTER DAM (TY 2)
	ROCK FILTER DAM (TY 3)
	DIRECTION OF FLOW

- NOTES:
- ① EXTEND SILT FENCE SO STORM WATER DOES NOT GO AROUND THE ENDS. USE L-HOOKS ON ENDS AS REQUIRED.
 - ② EXTEND ROCK FILTER DAM SO STORM WATER DOES NOT GO AROUND THE ENDS.







Andrew Mosley, P.E. 06/20/2024
SCALE = NTS SHEET 1 OF 5

Texas Department of Transportation
Wichita Falls District Standard

TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES


WFS-TA-BMP

FILE: BMPLAYOUTS.dgn	DW: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
JULY 2019	DIST	COUNTY	SHEET NO.	
	WFS	ARCHER, ETC	58	

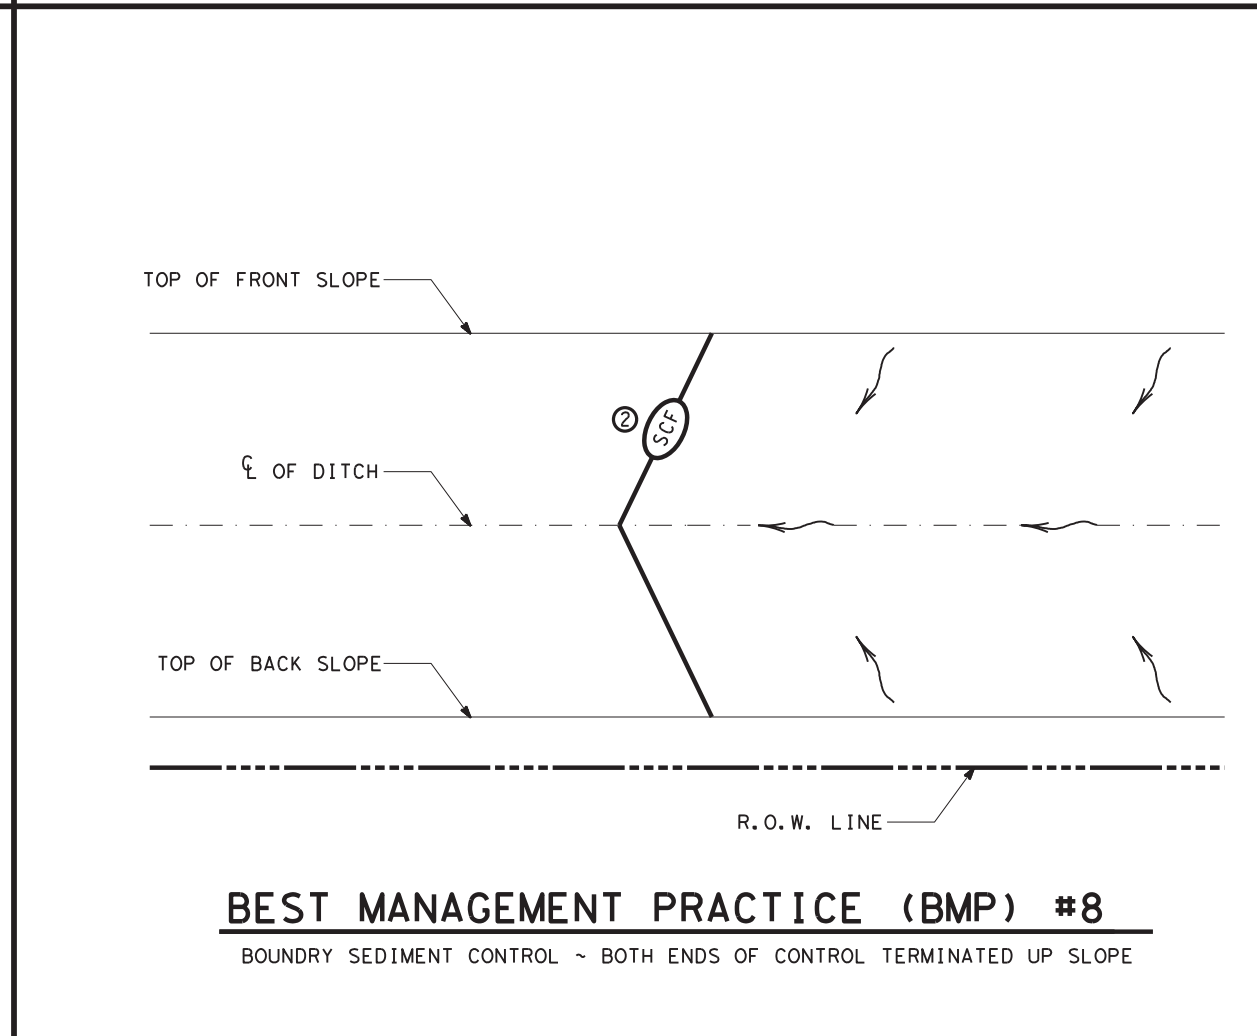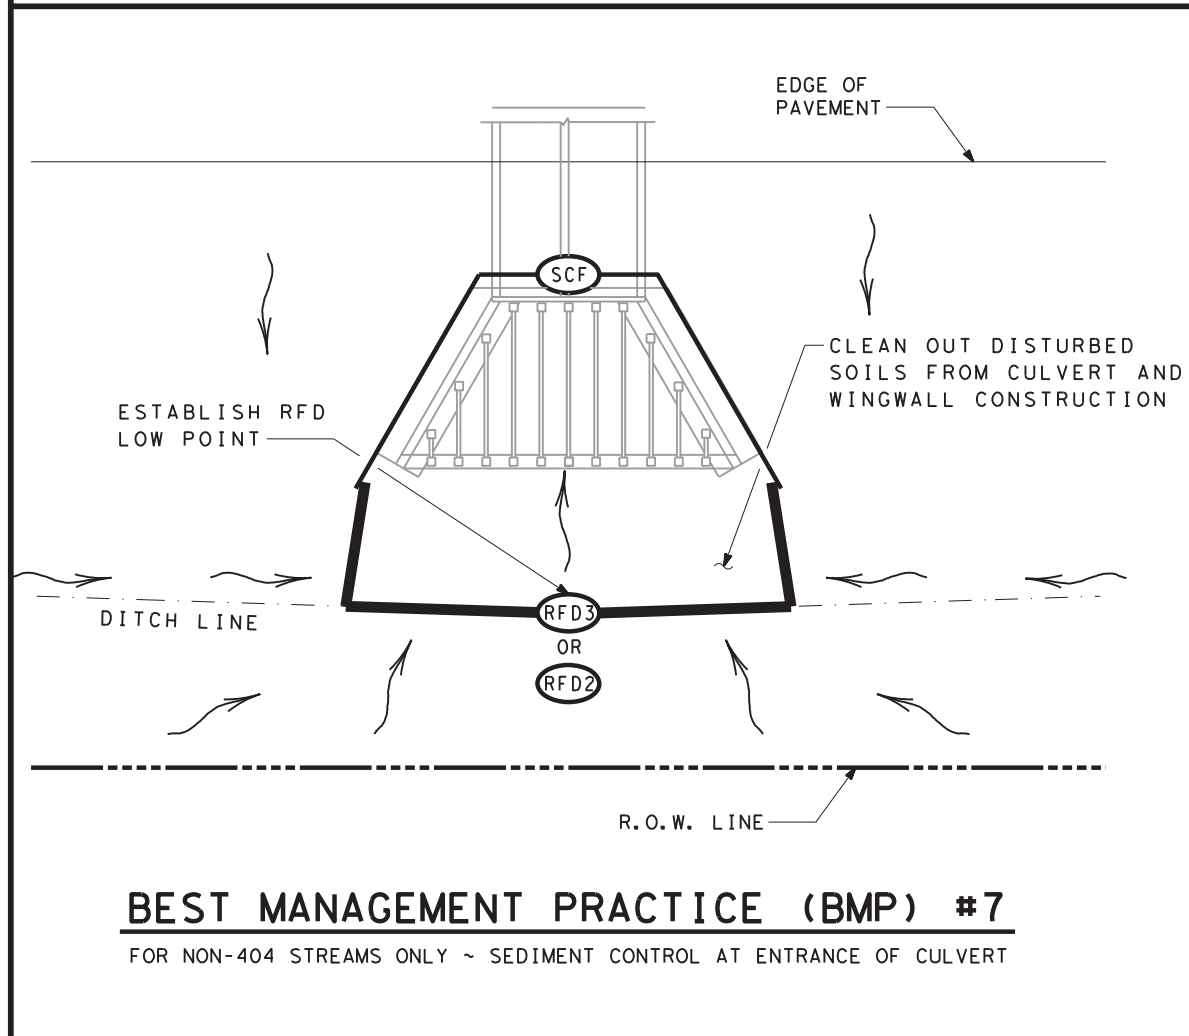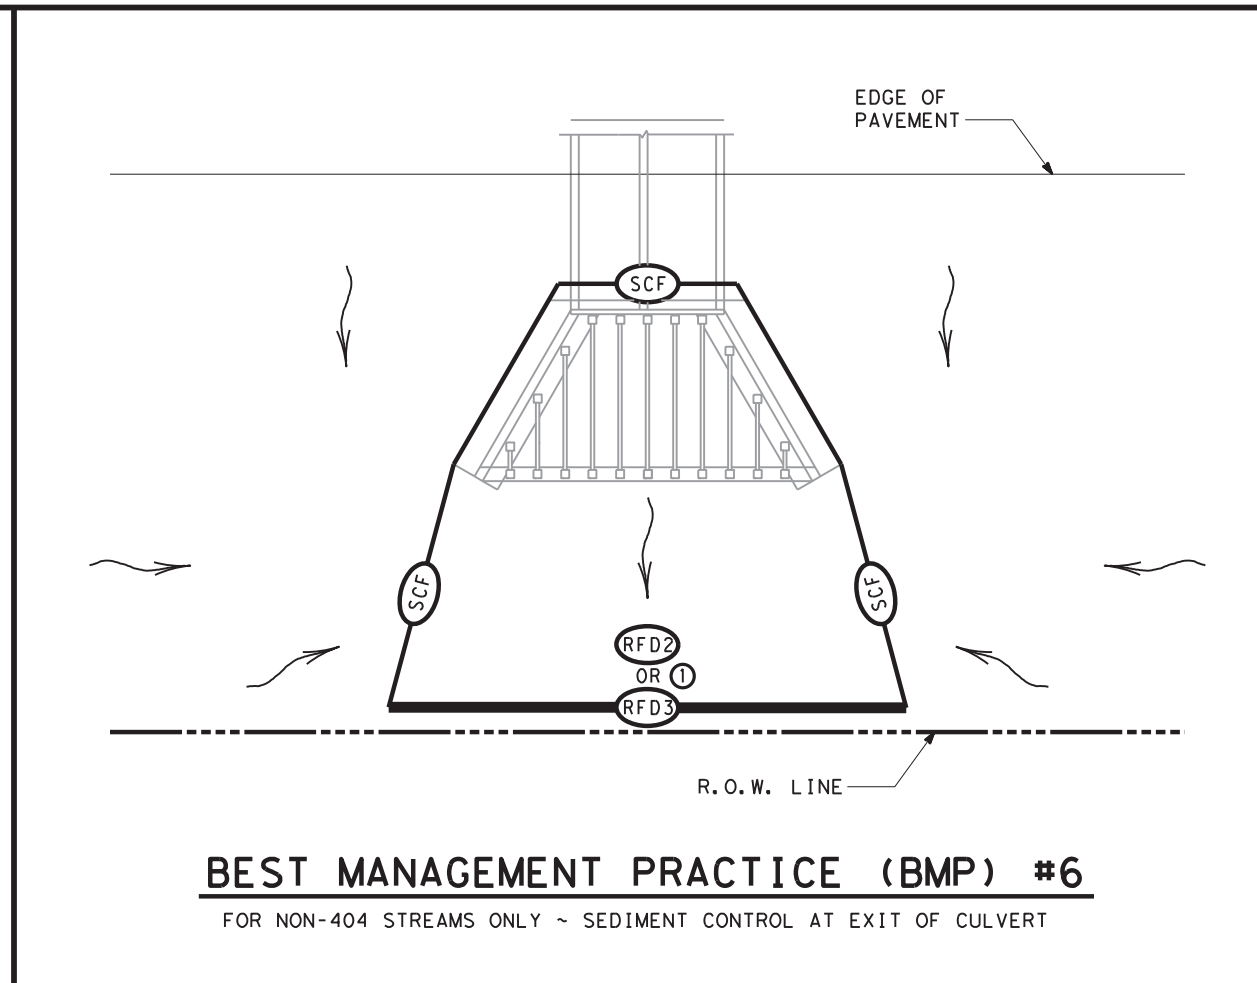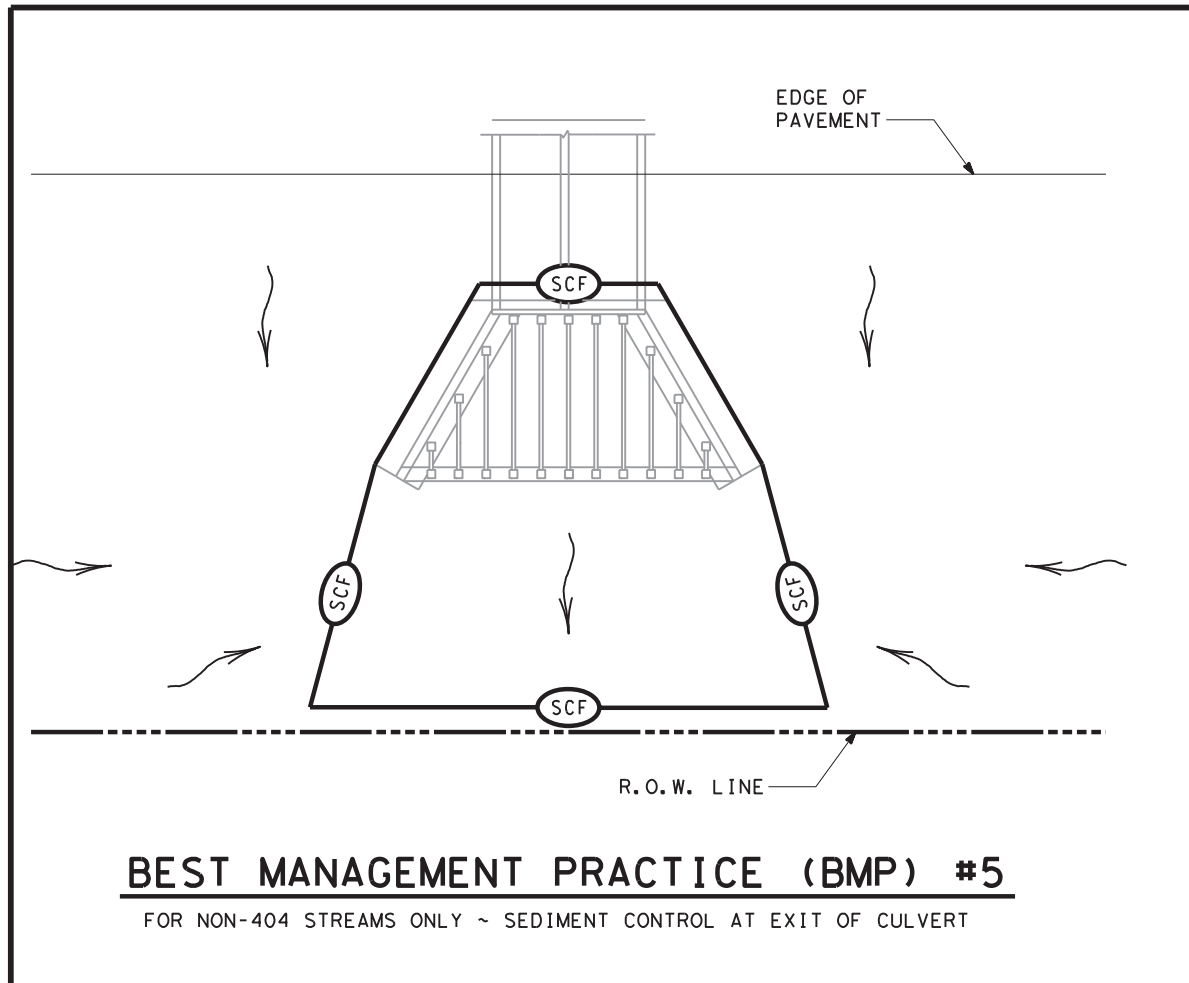

	SEDIMENT CONTROL FENCE
	ROCK FILTER DAM (TY 2)
	ROCK FILTER DAM (TY 3)
	DIRECTION OF FLOW

- NOTES:
- PROVIDE OVERLAP OF SILT FENCE WITH ROCK FILTER DAM.
 - ROCK FILTER DAMS OR EARTH/GRASSED EMBANKMENTS CAN BE SUBSTITUTED AS DIRECTED.




Andrew Mosley, P.E. 06/20/2024
SCALE = NTS SHEET 2 OF 5

Texas Department of Transportation
Wichita Falls District Standard

TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES

WFS-TA-BMP

FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
JULY 2019	DIST	COUNTY	SHEET NO.	
	WFS	ARCHER, ETC	59	

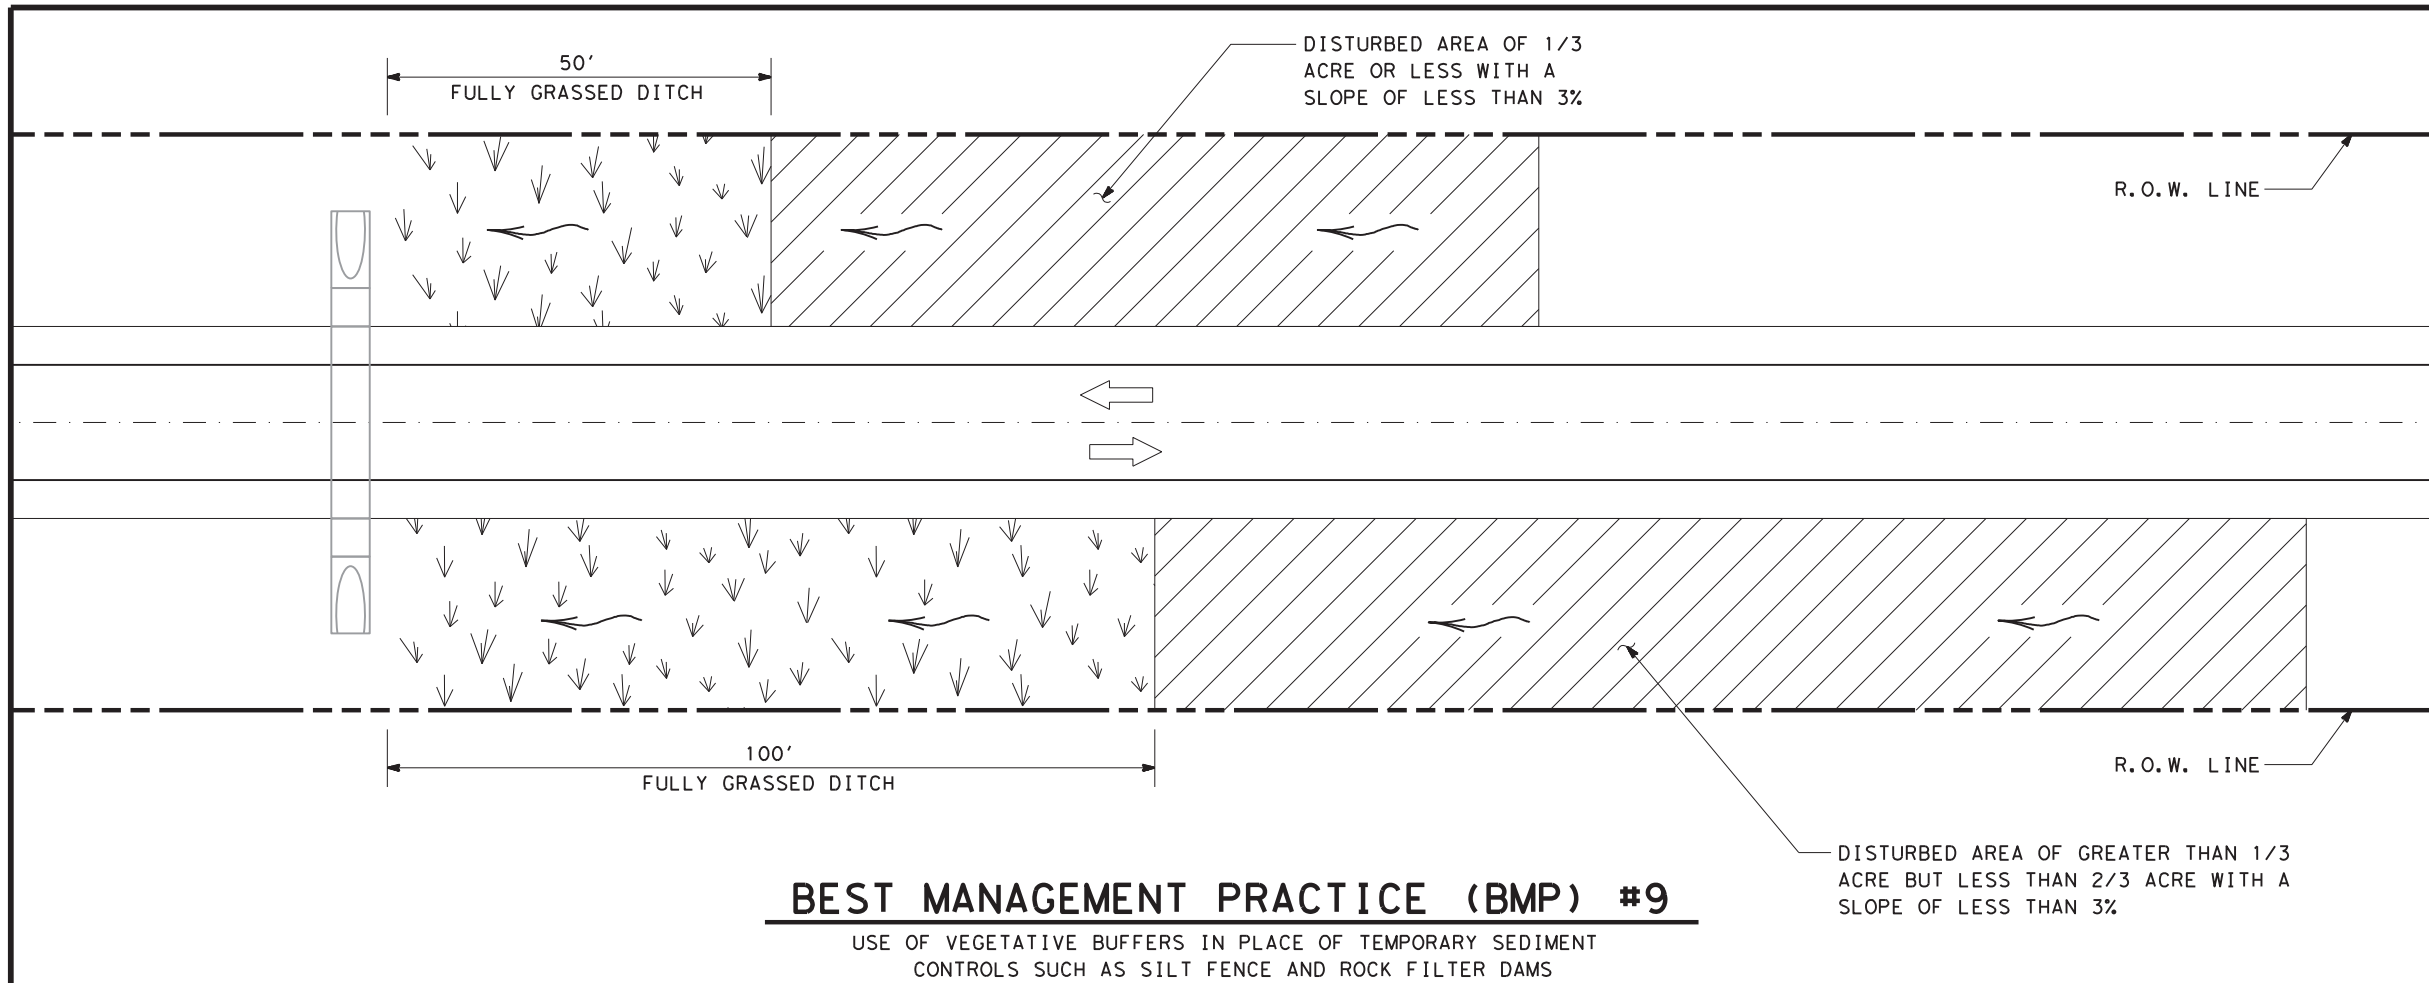


BEST MANAGEMENT PRACTICE (BMP) #9

USE OF VEGETATIVE BUFFERS IN PLACE OF TEMPORARY SEDIMENT CONTROLS SUCH AS SILT FENCE AND ROCK FILTER DAMS


	FULLY GRASSED DITCH
	DISTURBED AREA
	DIRECTION OF FLOW
	EROSION CONTROL LOG
	SOD

NOTES:
 ① SEDIMENT CONTROL FENCE, OR OTHER DEVICES CAN BE SUBSTITUTED AS DIRECTED BY THE ENGINEER.

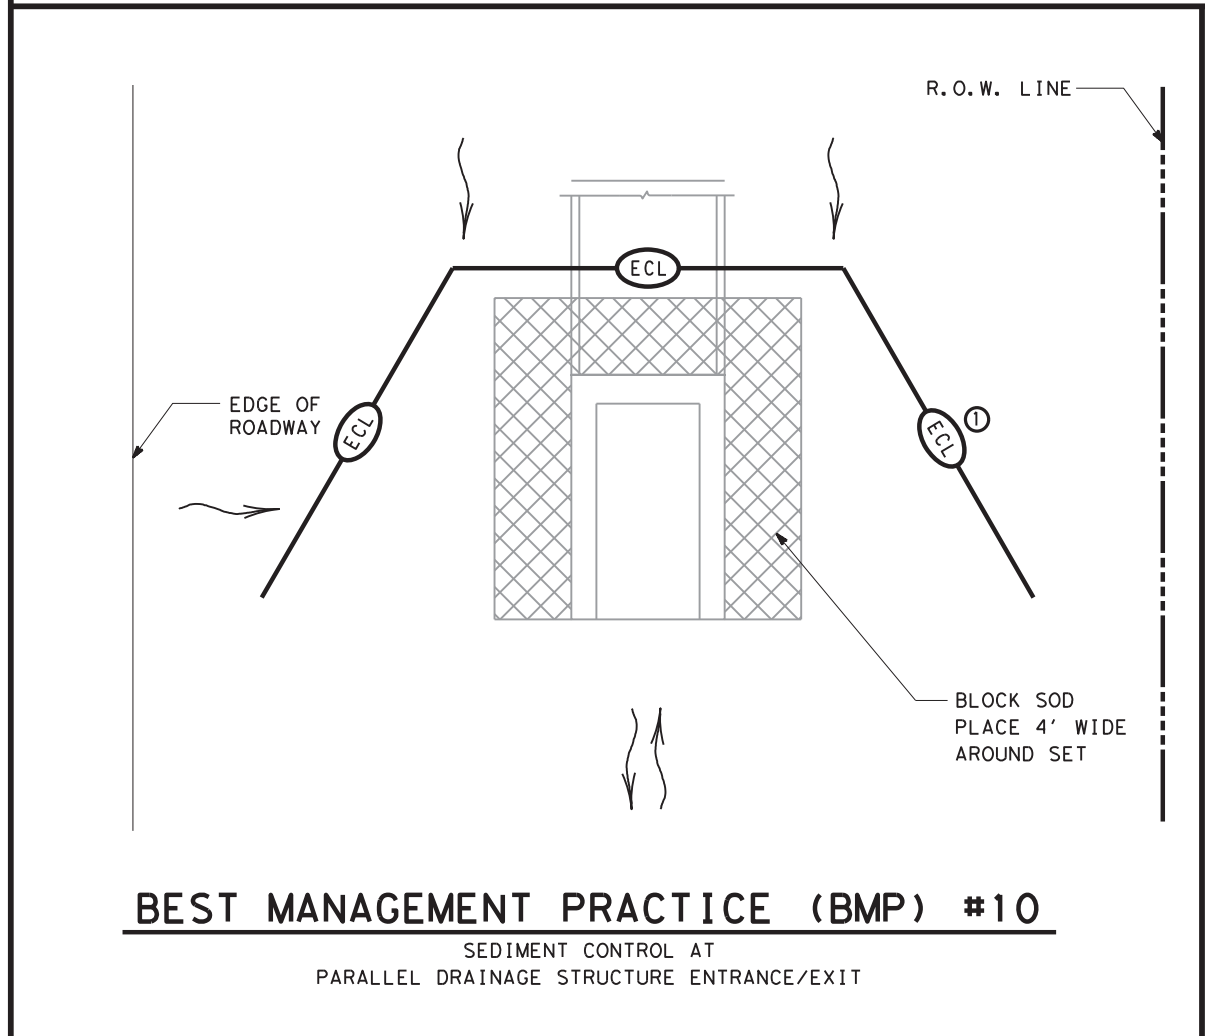


BEST MANAGEMENT PRACTICE (BMP) #10

SEDIMENT CONTROL AT PARALLEL DRAINAGE STRUCTURE ENTRANCE/EXIT

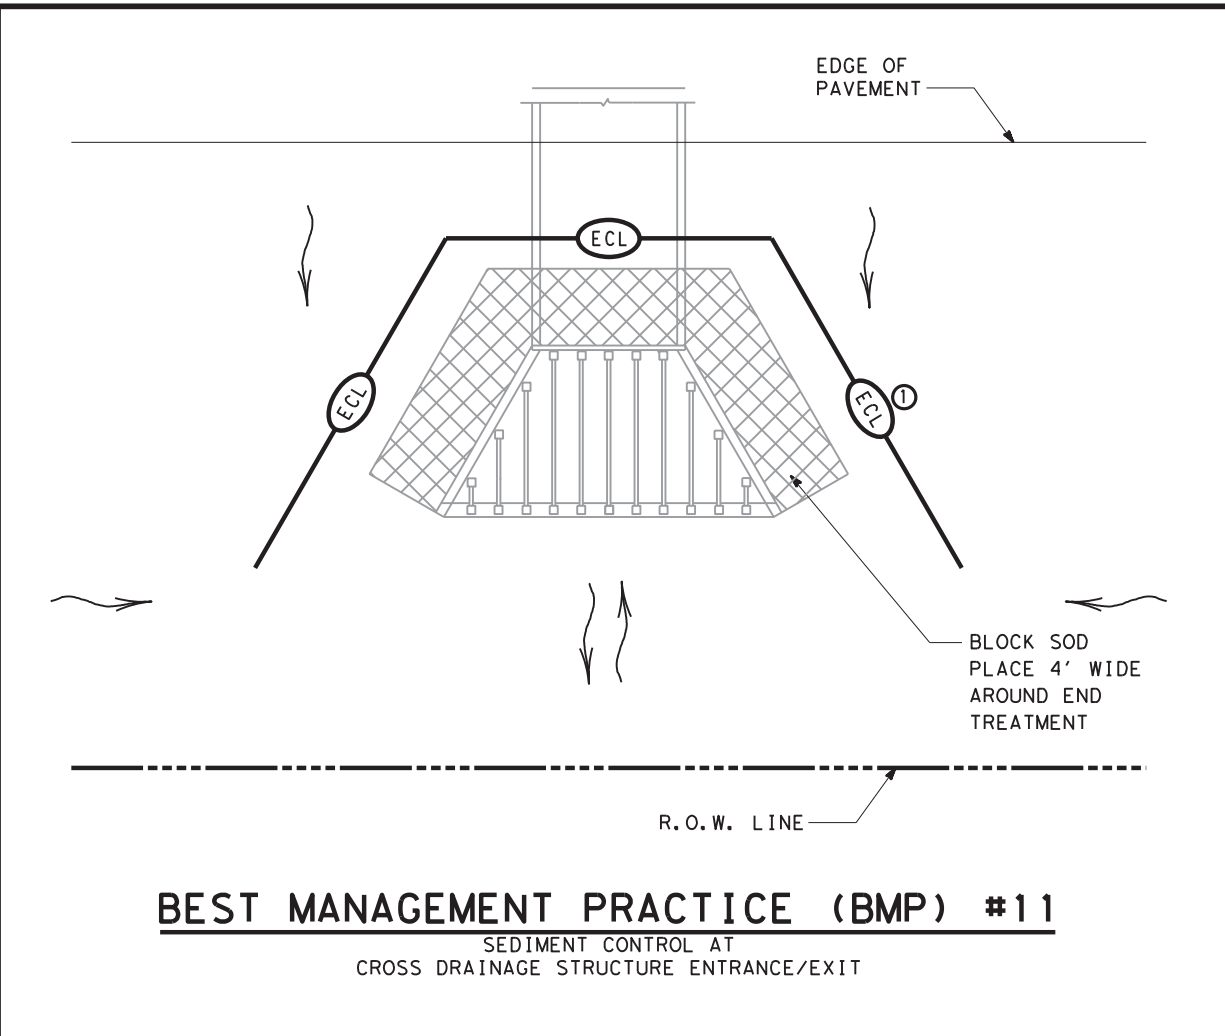

BEST MANAGEMENT PRACTICE (BMP) #11

SEDIMENT CONTROL AT CROSS DRAINAGE STRUCTURE ENTRANCE/EXIT



Andrew Mosley, P.E. 06/20/2024
 SCALE = NTS SHEET 3 OF 5

Texas Department of Transportation
 Wichita Falls District Standard
TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES

WFS-TA-BMP

FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
JULY 2019	DIST	COUNTY	SHEET NO.	
	WFS	ARCHER, ETC	60	

DEPARTMENT MATERIAL SPECIFICATIONS		
PLYWOOD SIGN BLANKS		DMS-7100
FLAT SURFACE REFLECTIVE SHEETING		DMS-8300
VINYL NON-REFLECTIVE DECAL SHEETING		DMS-8320

COLOR	USAGE	REFLECTIVE SHEETING OR OTHER MATERIAL
WHITE	BACKGROUND	TYPE C (FLUORESCENT PRISMATIC)
BLACK	LEGEND & BORDERS	VINYL NON-REFLECTIVE DECAL SHEETING

SIGN GENERAL NOTES:

A. THE ALPHABETS AND LATERAL SPACING BETWEEN LETTERS AND NUMERALS SHALL CONFORM WITH THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS", (TMUTCD) LATEST EDITION, AND THE "COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST". LATERAL SPACING OF TEXT SHALL PROVIDE A BALANCED APPEARANCE. ALL MATERIALS SHALL CONFORM TO DEPARTMENT SPECIFICATIONS.



B. LEGEND AND BORDER MAY BE APPLIED BY REVERSE SCREENING PROCESS WITH TRANSPARENT COLORED INK, CUT-OUT WHITE REFLECTIVE SHEETING APPLIED TO COLORED BACKGROUND OR COMBINATION THEREOF. BACKGROUND SHALL BE REFLECTIVE SHEETING TYPE C.

C. FINAL SIGN LOCATION SHALL BE AS APPROVED BY THE ENGINEER. IF THE SIGN CANNOT BE PLACED OUTSIDE THE CLEAR ZONE, IT MUST ADHERE TO THE TMUTCD. IF PLACED OUTSIDE THE CLEAR ZONE, SIGN MAY BE PLACED PERPENDICULAR OR PARALLEL TO ROW LINE.


D. SIGN DIMENSION IS 42" WIDE X 24" TALL WITH 5" BLACK LETTERS.

Concrete Washout


CONCRETE WASHOUT SIGN DETAIL 10

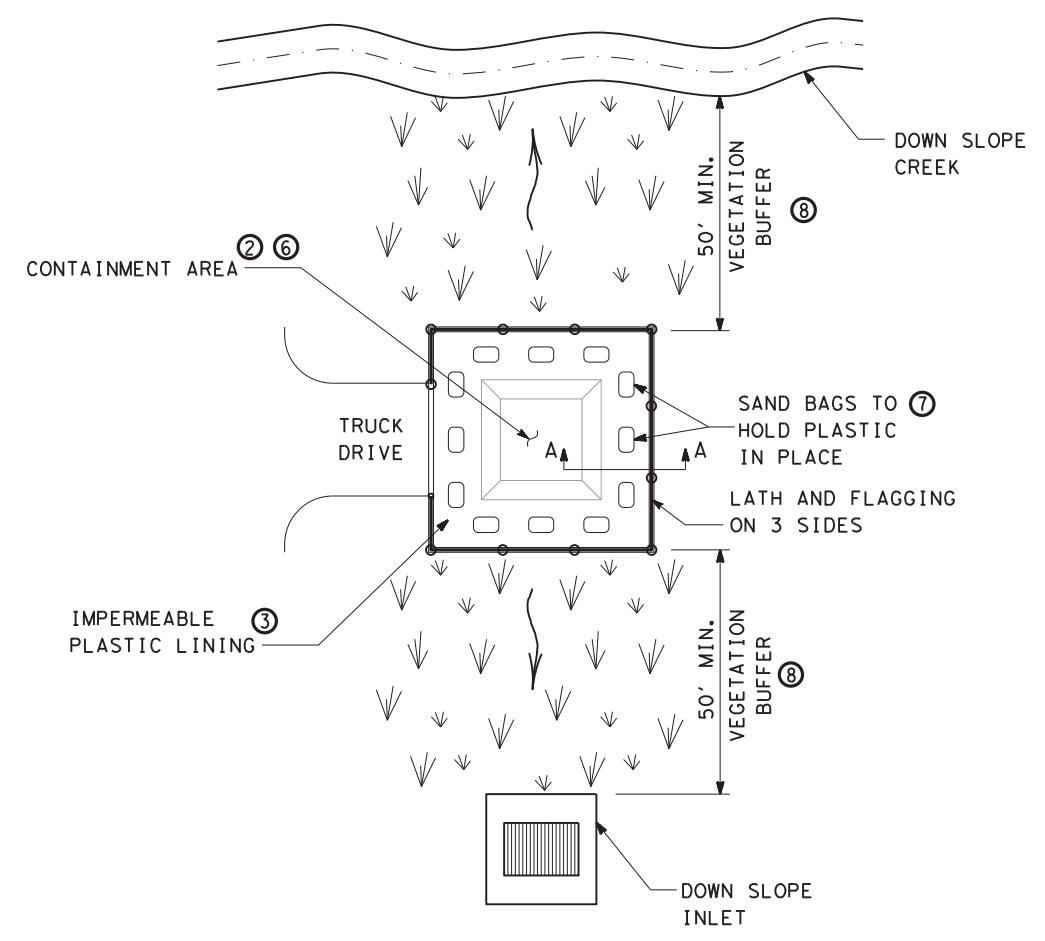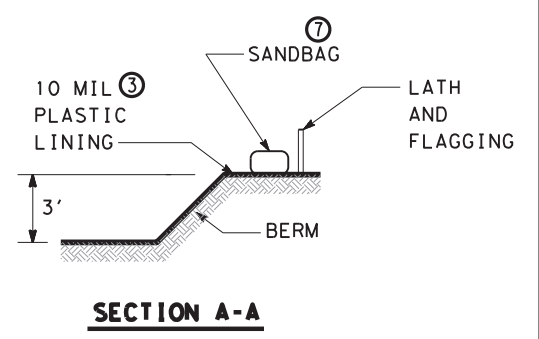

BEST MANAGEMENT PRACTICE (BMP) #12
CONCRETE TRUCK WASHOUT AREA 10

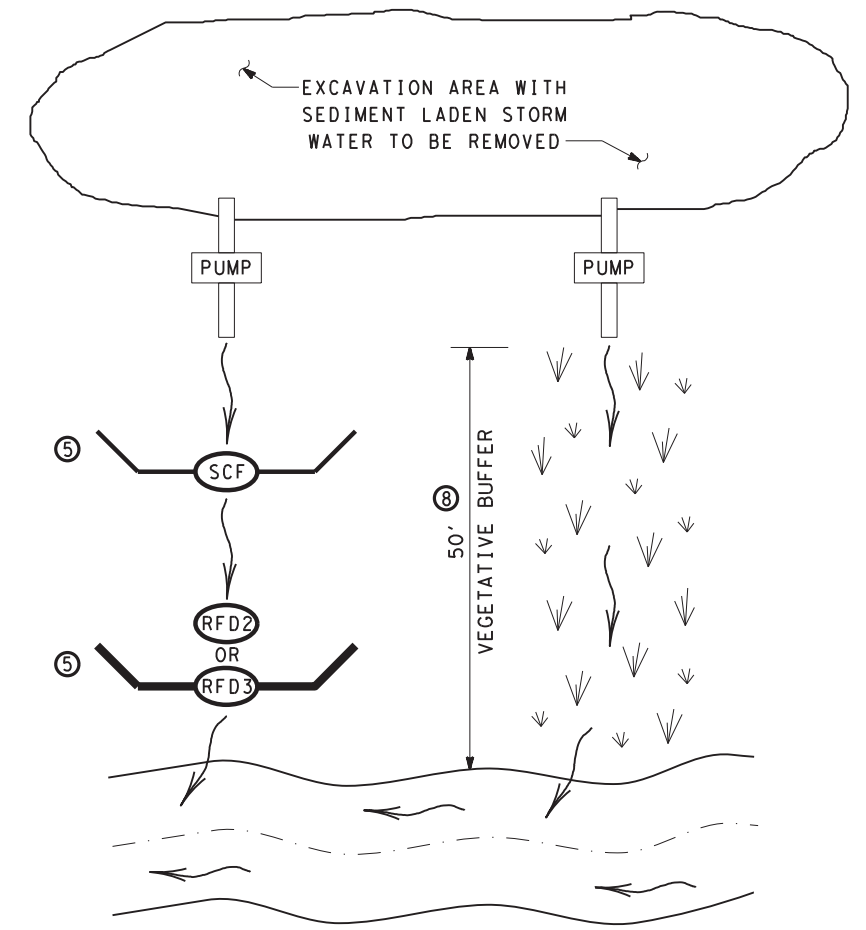


BEST MANAGEMENT PRACTICE (BMP) #13
PUMPED STORM WATER SEDIMENT CONTROLS 1

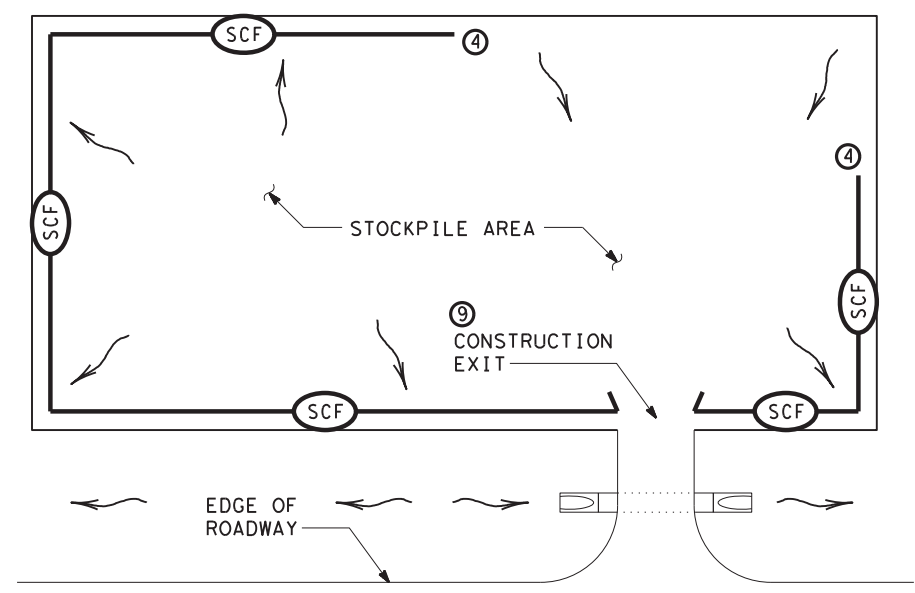

BEST MANAGEMENT PRACTICE (BMP) #14
STOCKPILE SEDIMENT CONTROL

↓ ↓ ↓ ↓ ↓	VEGETATIVE BUFFER
→ → → → →	DIRECTION OF FLOW
○ SCF	SEDIMENT CONTROL FENCE
○ RFD2	ROCK FILTER DAM (TY 2)
○ RFD3	ROCK FILTER DAM (TY 3)

- NOTES:**
- PUMPED STORM WATER FROM AN EXCAVATION AREA SHOULD BE DISCHARGED IN A 50' VEGETATIVE BUFFER OR THROUGH TWO TEMPORARY SEDIMENT CONTROLS.
 - WHEN CONTAINMENT AREA REACHES 1' FREEBOARD, DISCONTINUE WASHOUT PLACEMENT AND REMOVE MATERIAL UPON SOLIDIFICATION.
 - EACH TIME SOLIDIFIED MATERIAL IS REMOVED REPLACE PLASTIC SHEETING. USE 10 MIL PLASTIC LINING MINIMUM.
 - START SEDIMENT CONTROL AT LOCATION SO ALL STORM WATER WITH SEDIMENT IS COLLECTED
 - ROCK FILTER DAMS, SEDIMENT CONTROL FENCE, OR OTHER DEVICES CAN BE SUBSTITUTED AS DIRECTED.
 - ACTUAL SIZE, LAYOUT, & LOCATION WILL BE DETERMINED IN THE FIELD.
 - AN EARTHEN BERM MAY BE USED IN LIEU OF SANDBAGS.
 - VEGETATIVE BUFFER SHOULD HAVE AT A MINIMUM 70% VEGETATIVE COVERAGE
 - PLACEMENT OF DEVICES FOR OFFSITE TRACKING AS APPLICABLE AND/OR DIRECTED BY THE ENGINEER.
 - ALL ITEMS REQUIRED FOR CONCRETE WASHOUT AND SIGN SHALL BE SUBSIDIARY TO ITEM 506.




Andrew Mosley, P.E. 06/20/2024
SCALE = NTS SHEET 4 OF 5

Texas Department of Transportation
Wichita Falls District

TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES

WFS-TA-BMP


FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
JULY 2019	DIST	COUNTY	SHEET NO.	
	WFS	ARCHER, ETC	61	

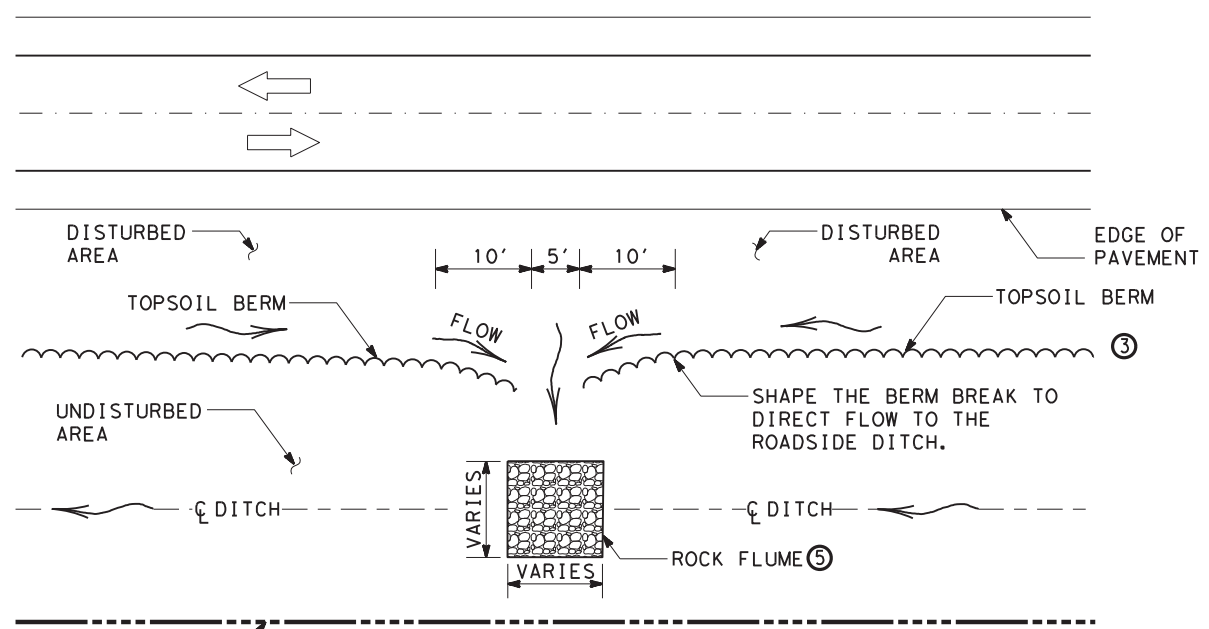

"BERM BREAK" DETAIL PLAN VIEW ②

BEST MANAGEMENT PRACTICE (BMP) #15


SEDIMENT CONTROL AND BERM DETAIL WITH BERM ON FRONTSLOPE

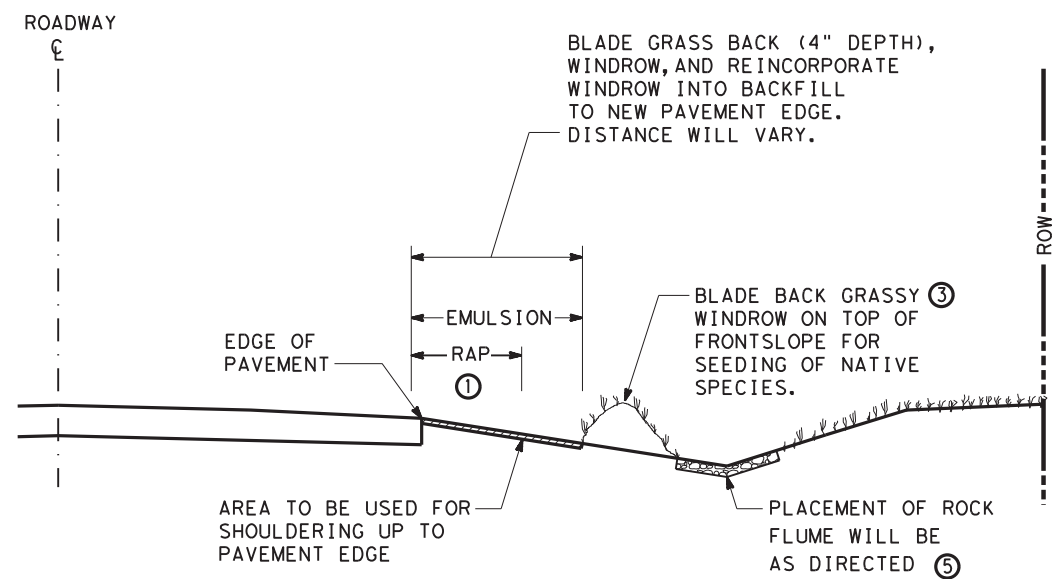

TYPICAL DITCH SECTION SHOWING BERM/WINDROW OF TOPSOIL

	FULLY GRASSED DITCH
	DISTURBED AREA
	DIRECTION OF FLOW
	SEDIMENT CONTROL FENCE
	ROCK FLUME-ENERGY DISSIPATOR
	BERM


- NOTES:
- AS DIRECTED PLACE RAP ADJACENT TO EDGE OF PAVEMENT AS A BACKFILL MATERIAL. PLACEMENT DISTANCE IS TO BE A MINIMUM OF 4' OR AS NEEDED TO ACHIEVE SMOOTH TIE IN TO EXISTING FRONT SLOPE.
 - BREAK BERM SO THAT MAXIMUM FLOW LENGTH ALONG THE BERM IS LESS THAN 1000'. BREAK BERM IN LOW AREAS WHERE FLOW MAY OVERTOP THE BERM. DO NOT BREAK BERM ON HILLTOPS OR WHERE RUNOFF AND SEDIMENT FLOW DIRECTLY OFF THE ROW.
 - LOCATION OF BERM WILL VARY. BERM COULD BE PLACED ON FRONTSLOPE OR BACKSLOPE DEPENDING ON FIELD CONDITIONS. SEE SPECIFIC SW3P LAYOUT SHEET FOR MORE DETAILS ON LOCATION OF BERM.
 - ROCK FILTER DAMS, SEDIMENT CONTROL FENCE, EROSION CONTROL LOGS, ROCK FLUME, OR OTHER DEVICES CAN BE SUBSTITUTED AS DIRECTED. DEVICE MAY NOT BE NEEDED IN ALL LOCATIONS. SEE SPECIFIC SW3P LAYOUT SHEET FOR MORE DETAILS ON LOCATION OF DEVICES.
 - PLACE ROCK FLUME DISSIPATOR AS DIRECTED BY THE ENGINEER. SIZE AND LOCATIONS OF ROCK FLUME WILL VARY. PROVIDE ROCK OR RUBBLE WITH A 3" TO 6" AGGREGATE. SECURE ROCK WITH 20-GAUGE GALVANIZED WOVEN WIRE MESH WITH 1" DIAMETER HEXAGONAL OPENINGS. ROCK SHOULD BE PLACED ON THE MESH AND MESH SHALL BE FOLDED AT THE UPSTREAM SIDE OVER THE ROCK AND TIGHTLY SECURED TO ITSELF ON THE DOWNSTREAM SIDE USING WIRE TIES. PAYMENT WILL BE MADE BY ITEM TEMP PAVED FLUME (INSTALL).

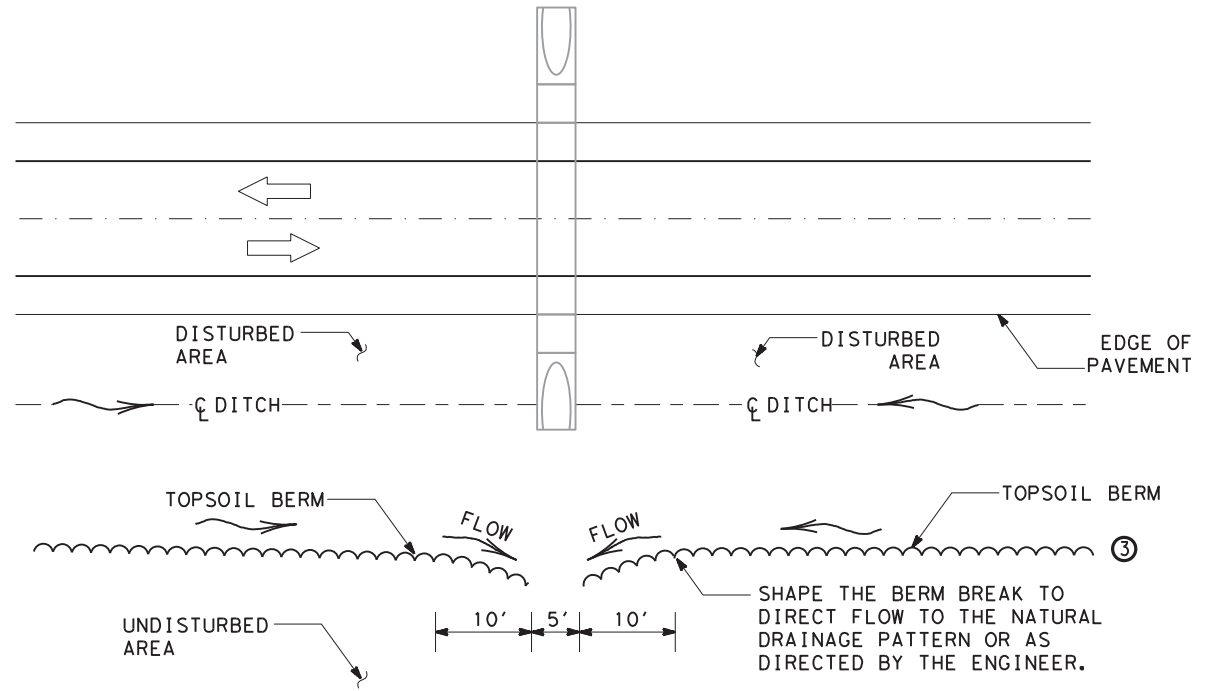


"BERM BREAK" DETAIL PLAN VIEW ②

BEST MANAGEMENT PRACTICE (BMP) #16

SEDIMENT CONTROL AND BERM DETAIL AT CROSS DRAINAGE STRUCTURE WITH BERM ON BACKSLOPE

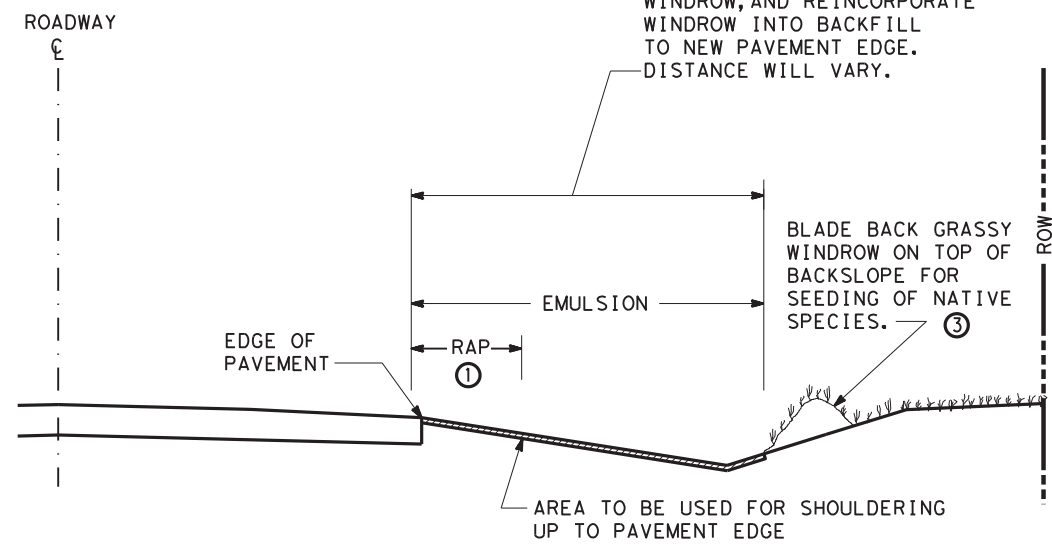

TYPICAL DITCH SECTION SHOWING BERM/WINDROW OF TOPSOIL



Andrew Mosley, P.E. 06/20/2024
SCALE = NTS SHEET 5 OF 5

Texas Department of Transportation
Wichita Falls District Standard

TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES

WFS-TA-BMP

FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
JULY 2019	DIST	COUNTY	SHEET NO.	
	WFS	ARCHER, ETC	62	

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (PERMANENT) (URBAN) (SAND or CLAY)		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
PERMANENT: EARLY SPRING SEED FROM FEBRUARY 1st THROUGH May 15th. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP: BUFFALO GRASS (Texoka) COMMON BERMUDA GRASS (HULLED) BLUE GRAMA (NATIVE)	4.0 LBS PLS / ACRE 5.0 LBS PLS / ACRE 1.5 LBS PLS / ACRE @1/4 -1/2" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (PERMANENT) (RURAL) (CLAY)		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
PERMANENT: EARLY SPRING SEED FROM FEBRUARY 1st THROUGH May 15th. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP: GREEN SPRANGETOP SIDEOATS GRAMA BUFFALOGRASS BERMUDA GRASS BLACKWELL SWITCHGRASS ILLINOIS BUNDLEFLOWER	1.5 LBS PLS / ACRE 1.5 LBS PLS / ACRE 3.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 0.5 LBS PLS / ACRE @1/4 -1/2" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (PERMANENT) (RURAL) (SANDY)		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
PERMANENT: EARLY SPRING SEED FROM FEBRUARY 1st THROUGH May 15th. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP: GREEN SPRANGETOP BERMUDA GRASS SAND LOVEGRASS SAND DROPSEED WEEPING LOVEGRASS BLUE GRAMA PARTRIDGE PEAS (COMANCHE)	1.5 LBS PLS / ACRE 2.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE @1/4 -1/2" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		


ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (URBAN) WARM SEASON SEEDING		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: LATE SPRING & SUMMER SEED FROM MAY 16th THROUGH AUGUST 31st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) COMMON BERMUDA GRASS (UNHULLED) FOXTAIL MILLET	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 15. LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (RURAL) WARM SEASON SEEDING		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: LATE SPRING & SUMMER SEED FROM MAY 16th THROUGH AUGUST 31st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) BERMUDA GRASS (UNHULLED) GREEN SPRANGETOP FOXTAIL MILLET	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 20. LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

NOTES:

1. SEE NOTES ON TA-VES SHEET 2 OF 2 FOR ADDITIONAL INFORMATION.

SCALE = NTS SHEET 1 OF 2



Andrew Mosley, P.E.

06/20/2024

Texas Department of Transportation
Wichita Falls District Standard
**TYPICAL APPLICATION
FOR
VEGETATION
ESTABLISHMENT SHEET**

WFS-TA-VES

FILE: BMLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS JULY 2019	6469	86	001	SH 25, ETC
DIST	COUNTY		SHEET NO.	
WFS	ARCHER, ETC		63	

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (URBAN) COOL SEASON SEEDING		
"COOL SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: EARLY FALL SEED FROM SEPTEMBER 1st THROUGH DECEMBER 1st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) COMMON BERMUDA GRASS (UNHULLED) TALL FESCUE ANNUAL RYE GRASS	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 15.0 LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (RURAL) COOL SEASON SEEDING		
"COOL SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: EARLY FALL SEED FROM SEPTEMBER 1st THROUGH DECEMBER 1st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) BERMUDA GRASS (UNHULLED) GREEN SPRANGLETOP WESTERN WHEATGRASS CANADA WILD RYE GRASS ELBON RYE GRASS	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 3.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 15.0 LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

NOTES:

1. ALL SEED MIXTURE TYPES SHALL BE PURCHASED IN PRE- MIXED BAGS, "BY TYPE" BLENDED BY THE GROWER SHIPPER.
2. SOILS THAT ARE COMPACTED, HAVE CLODS, SHALL BE REWORKED UNTIL READY FOR SEEDING. AS DIRECTED.
3. ALL SOIL SURFACES SHALL BE LEVEL WITH NATURAL FLOWING SMOOTH GRADES. NO TIRE RUTS OR FURTHER TRAFFIC ALLOWED.
4. SOIL SURFACE SHALL BE FIRM BUT NOT COMPACTED, ALLOWING 1/4" DEPRESSION UNDER NORMAL FOOT TRAFFIC.
5. SEED 100% OF THE BED AREA. NO SKIPS OR VOID AREAS ALLOWED. EXAMPLE:AREAS AROUND SIGN POSTS AND INLETS.
6. SEED UP TO THE FIRST 6" OF THE EDGE OF PAVEMENT. AS DIRECTED, HAND RAKE ISOLATED SEEDED AREAS.
7. WEIGH ALL CALIBRATED SEED SAMPLES FOR ACCURACY AND PRESENT DOCUMENTATION TO ENGINEER.

FOR DRILL SEEDING


8. USE ONLY PROFESSIONAL NATIVE GRASS OR TURF GRASS (MULTI- 3 BIN) DRILL SEEDERS. NO DROP SEEDERS ALLOWED.
OTHER TYPES OF SEEDERS AS APPROVED BY THE ENGINEER.
9. CALIBRATE DRILL SEEDER FOR SPECIFIED (PLS) PER ACRE BEFORE DRILL SEEDING.
10. DRILL SEEDER MUST BE EQUIPPED WITH THE LARGE FRONT CUTTING COULTERS DURING THE INSPECTION OF DRILL SEEDER.

FOR BROADCAST SEEDING

11. USE ONLY COMMERCIAL TYPE CYCLONE TYPE SPREADERS.
12. CALIBRATE CYCLONE SPREADER FOR 1000 Sq. Ft. (PLS) PER ACRE BEFORE SEEDING.
13. TO PREVENT SEED SEPARATION IN SPREADERS, SPREAD ALL SEED TYPES INDEPENDENTLY IN A SEPARATE APPLICATION.
14. IMMEDIATELY AFTER SEEDING, IN ONE OR TWO OPERATIONS, CULTI-PACK THE SEEDED SOILS AND FIRM SEED INTO SURFACE.
15. DISCONTINUE SEEDING IF WIND EXCEEDS 10 MPH.

ITEM 314 EMULSIFIED ASPHALT TREATMENT	
TIME SCHEDULE	FUNCTIONAL USE:
IMMEDIATELY AFTER: SOIL PREPARATION OR WITHIN 24 HOURS AFTER SEEDING, APPLY THE TACK COAT TO DESIGNATED SOIL SURFACES.	SOIL EROSION CONTROL, OR MOISTURE RETENTION BARRIER.
NOTES:	
<ol style="list-style-type: none"> 1. ALL TRUCK APPLICATIONS SHALL BE COMPLETED IN ONE PASS OF THE DISTRIBUTOR. ALL TOUCH UP WORK WILL BE FINISHED BY HAND AND HOSE PROCEDURES. APPLY FROM EDGE OF PAVEMENT THROUGH THE FULL SPECIFIED AREAS. 2. ENGINEER WILL INSPECT FOR ACCURACY THE OVERALL DEPTH OF THE APPLIED TACK COAT MATERIALS. 3. FURTHER VEHICULAR TRAFFIC IS NOT ALLOWED ON LAID BY TACK COAT SURFACES. AT THE CONTRACTORS EXPENSE ALL DAMAGES TO TACK COAT SURFACES WILL BE RE -SHOT AS DIRECTED BY THE ENGINEER. 4. USE MATERIALS AS SPECIFIED FOR EROSION CONTROL ON TABLE 18 IN ITEM 300 ASPHALTS, OILS, AND EMULSIONS, AT A RATE OF 0.25 GAL/SY. 	

ITEM 166 FERTILIZER	
TIME SCHEDULE	FUNCTIONAL USE:
AFTER TOPSOIL PLOWING PREPARATIONS ARE COMPLETED, FERTILIZE ROW SOIL SURFACES AND HARROW 2" TO 4" DEEP INTO PLACE.	PLANT NUTRIENTS FOR PLANT AND ROOT DEVELOPMENT.
FERTILIZER SHALL BE EVENLY DISTRIBUTED AT A RATE OF 100 LBS OF NITROGEN PER ACRE. THE BREAK DOWN OF THE NITROGEN ELEMENT SHALL BE IN A 50% SLOW RELEASE FORM. ANALYSIS OF THE (NPK) IS: 3:1:1 OR AS DIRECTED BY THE AREA ENGINEER.	
ITEM 166 NOTES:	
<ol style="list-style-type: none"> 1. BROADCAST SPECIFIED FERTILIZER FROM THE EDGE OF PAVEMENT, THROUGH THE ENTIRE ROW SEED BED AREA. APPLICATIONS FOR EDGE OF PAVEMENT, CULVERTS, SIGN POST AREAS, GUARD RAILS AND ISOLATED AREAS SHALL BE APPLIED BY WALK BEHIND SPREADERS AND BY HAND. NO FERTILIZER ALLOWED ON PAVEMENT SURFACES. 2. ALL SPREADERS SHALL BE CALIBRATED BY THE CONTRACTOR AND THE ENGINEER FOR ACCURACY AND PERFORMANCE. SHALL USE UNOPENED 50# BAGS OF SPECIFIED FERTILIZER FOR DAILY CALIBRATIONS. APPLICATION SHALL BE A EVEN DISTRIBUTION OF PRODUCT ON DESIGNATED SOIL SURFACES. 3. FERTILIZER SHALL BE DELIVERED IN 50# BAGS UNLESS OTHERWISE SPECIFIED OR APPROVED PRIOR TO DELIVERY. BAGS SHALL BE CLEARLY LABELED SHOWING CONTENTS. IF BULK FERTILIZER IS APPROVED, DOCUMENTATION WILL BE REQUIRED FOR EACH LOAD OF MATERIAL DELIVERED VERIFYING AUTHENTICITY OF THE MATERIAL. CULTURAL PROCEDURES ARE UNDER THE DIRECTION OF THE TXDOT AREA ENGINEER. 	



Andrew Mosley, P.E.
06/20/2024

SCALE = NTS SHEET 2 OF 2

Texas Department of Transportation
Wichita Falls District Standard
TYPICAL APPLICATION FOR VEGETATION ESTABLISHMENT SHEET

WFS-TA-VES

FILE: BMLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS	6469	86	001	SH 25, ETC
JULY 2019	DIST	COUNTY	SHEET NO.	
	WFS	ARCHER, ETC	64	