

SEE SHEET 2 FOR INDEX OF SHEETS

# STATE OF TEXAS DEPARTMENT OF TRANSPORTATION

SS 447  
MAIN LANE DESIGN SPEED = 30 MPH  
ADT (2022) = 5857  
ADT (2042) = 7146  
FUNCTIONAL CLASSIFICATION: Principal Arterial  
(other)

FED. RD. DIV. NO.	FEDERAL AID PROJECT NO.		SHEET NO.
6	F 2024(665)		1
STATE	DIST.	COUNTY	
TEXAS	WFS	WICHITA	
CONT.	SECT.	JOB	HIGHWAY NO.
0156	12	020	SS 447

## PLANS OF PROPOSED STATE HIGHWAY IMPROVEMENT



FEDERAL AID PROJECT NO. F 2024(665)  
CONTROL SECTION JOB : 0156-12-020  
WICHITA COUNTY  
SS 447

LIMITS: FROM HOMES AVE.  
TO US 82


TOTAL LENGTH OF PROJECT	BRIDGE	=	1716.00FT.	=	0.325MI.
	ROADWAY	=	6695.04FT.	=	1.268MI.
	TOTAL	=	8411.04FT.	=	1.593MI.

TYPE OF WORK: SURFACING/ROADWAY RESTORATION  
CONSISTING OF: MILL AND OVERLAY

CONTRACTOR NAME: \_\_\_\_\_  
 CONTRACTOR ADDRESS: \_\_\_\_\_  
 LETTING DATE: \_\_\_\_\_  
 DATE WORK BEGAN: \_\_\_\_\_  
 DATE WORK COMPLETED: \_\_\_\_\_  
 DATE OF ACCEPTANCE: \_\_\_\_\_

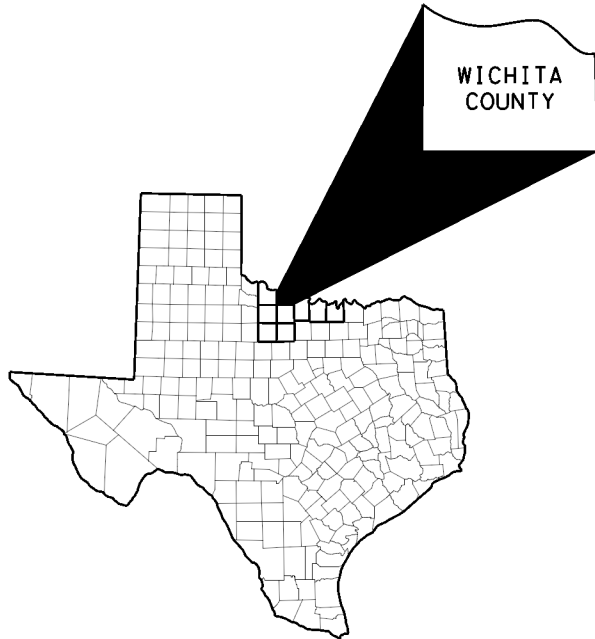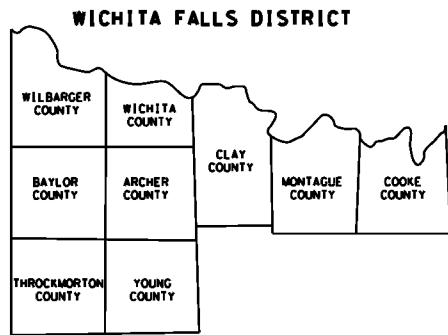

END PROJECT  
 STA. 522+66.71  
 REF. MARKER 188+1.593

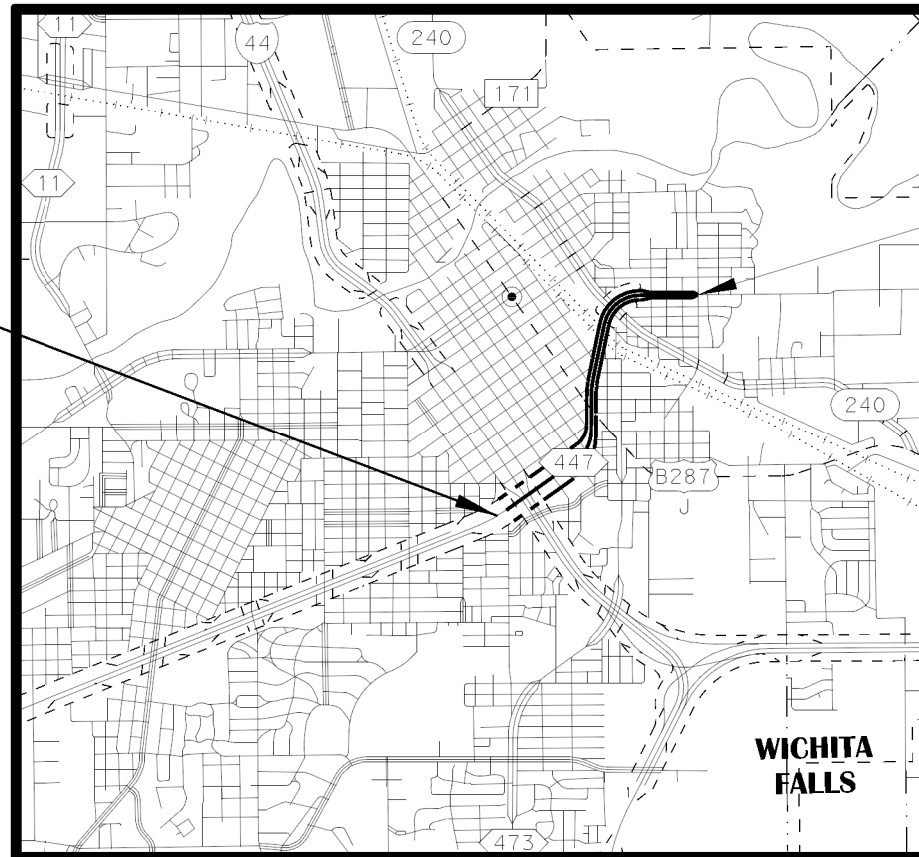

BEGIN PROJECT  
 CSJ: 0156-12-020  
 STA. 606+77.75  
 REF. MARKER 188+0.000

0 1/2 1  
 SCALE IN MILES

NO EXCEPTIONS  
 NO EQUATIONS  
 RAILROAD CROSSINGS: SEE S.O.W. SHEETS



SUBMITTED FOR LETTING 03/26/2024  
*Byron Jarama, P.E.*  
 DESIGN ENGINEER

RECOMMENDED FOR LETTING 03/28/2024  
*James L. Reaves, P.E.*  
 DISTRICT DIRECTOR OF TRANSPORTATION  
 PLANNING AND DEVELOPMENT

RECOMMENDED FOR LETTING 03/28/2024  
*Nicholas P. Baum, P.E.*  
 DISTRICT ENGINEER

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF  
 TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIFICATION ITEMS  
 LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT:  
 REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION  
 CONTRACTS (FORM FHWA 1273, OCTOBER 2023).


COUNTY \_\_\_\_\_ PROJ. NO. \_\_\_\_\_  
 HWY. NO. \_\_\_\_\_ LETTING DATE \_\_\_\_\_  
 DATE ACCEPTED \_\_\_\_\_

# INDEX OF SHEETS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
<b>GENERAL</b>	
1	TITLE SHEET
2	INDEX OF SHEETS
3-6	GENERAL NOTES
7-14	TYPICAL SECTIONS
15-16	ESTIMATE & QUANTITY
17	QUANTITY SUMMARY
18	SIDEROAD SUMMARY
<b>TRAFFIC CONTROL PLAN &amp; STANDARDS</b>	
** 19-30	BC (1) -21 THRU BC (12) -21
** 31	TCP (1-5) -18
** 32	TCP (3-2) -13
** 33	TCP (3-3) -14
** 34	TCP (5-1) -18
** 35	TCP (6-1) -12
** 36	TCP (6-2) -12
** 37	TCP (6-3) -12
** 38	TCP (6-4) -12
** 39	TCP (6-5) -12
** 40	TCP (6-9) -14
** 41	WZ (RS) -22
** 42	WZ (STPM) -23
** 43	WZ (UL) -13
<b>ROADWAY DETAILS &amp; STANDARDS</b>	
44-50	PLAN LAYOUT
51	PLANING DETAIL
52	HOTMIX LONGITUDINAL JOINT DETAIL
53	TREATMENT FOR VARIOUS EDGE CONDITIONS
54	EMBANKMENT DETAIL
55	FLEXIBLE PAVEMENT REPAIR DETAIL
56-57	REPCP-14
58	CONCRETE PAVEMENT DETAILS JOINT SEALS
** 59	GF (31) -19
** 60	GF (31) DAT-19
** 61	GF (31) MS-19
** 62-63	GF (31) TR TL3-20
** 64	SGT (10S) 31-16
** 65	SGT (11S) 31-18
** 66	SGT (12S) 31-18
<b>DRAINAGE DETAILS &amp; STANDARDS</b>	
** 67	CONCRETE CURB AND CURB AND GUTTER
<b>BRIDGE DETAILS &amp; STANDARDS</b>	
68-70	CLEANING AND SEALING BRIDGE JOINTS
** 71	BED-14
72	T202 TRANSITION RETROFIT GUIDE
<b>PAVEMENT MARKINGS &amp; DELINEATION &amp; SIGNING</b>	
73-79	SIGN AND STRIPING LAYOUT
80	SUMMARY OF SMALL SIGNS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
<b>PAVEMENT MARKINGS &amp; DELINEATION &amp; SIGN STANDARDS</b>	
** 81	PM (1) -22
** 82	PM (2) -22
** 83	PM (3) -22
** 84	PM (4) -22A
** 85	FPM (2) -22
** 86	FPM (3) -22
** 87	FPM (5) -22
** 88-93	D&OM (1) -20 THRU D&OM (6) -20
** 94	D&OM (VIA) -20
** 95	TSR (4) -13
** 96	SMD (GEN) -08
** 97	SMD (SLIP-1) -08
** 98	SMD (SLIP-2) -08
** 99	SMD (SLIP-3) -08
<b>RAIL ROAD</b>	
100-101	RAIL ROAD SCOPE OF WORK
** 102	RCD (1) -22
** 103	RCD (2) -22
<b>ENVIRONMENTAL ISSUES &amp; STANDARDS</b>	
104-105	SW3P
106	EPIC
107	TYPICAL SW3P LAYOUT
** 108-110	EC (9) -16
111-115	WFS-TA-BMP
116-117	WFS-TA-VES

DATE: 11/1/2023 6:48:09 AM  
FILE: p:\wfs\project\wiseonline.com\TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\INDEX OF SHEETS.dgn



THE STANDARD SHEETS SPECIFICALLY IDENTIFIED WITH A \*\* HAVE BEEN ISSUED BY ME AND ARE APPLICABLE TO THIS PROJECT.

*Bryson Lawrence, P.E.* 03/26/2024  
NAME DATE

**SS 447**  
**INDEX OF**  
**SHEETS**

© 2024  
**Texas Department of Transportation**  
SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY		SHEET NO.
WFS	WICHITA		2

**GENERAL NOTES**

**Basis of Estimate:**

<u>Item - Description</u>	<u>Rate*</u>	<u>Unit</u>
166 - Fertilizer	100 LB of Nitrogen / acre with a 3:1:1 ratio of N, P, K	LB
168 - Vegetative Watering	1.4 GAL/SY per Application every 2 weeks for 3 months	MG
314 – Emulsified Asphalt Treatment (Erosion Control) (MS-2 or SS-1)	0.25 GAL / SY	GAL
3077 – Superpave Mixtures	110 LB / SY / Inch	TON
3084 – Bonding Course	0.06 Gal / SY	GAL

\*For Contractor’s information only, actual production rates may vary.

**General Requirements**

Contractor questions on this project are to be addressed to the following individual(s):

Callan Coltharp, P.E.: [Callan.Coltharp@txdot.gov](mailto:Callan.Coltharp@txdot.gov)  
 Cody Bates, P.E.: [Cody.Bates@txdot.gov](mailto:Cody.Bates@txdot.gov)

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address: <https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

**Bid Item Specific General Notes**

**Item 4 - Scope of Work**

For the preconstruction conference submit a work schedule; temporary water pollution control plan; material sources; the person responsible for the SW3P; written utility coordination plan; certification statements; request for proposed subcontractors and letters designating the project superintendent, safety officer, and payroll officer at the preconstruction conference.

**Item 5 - Control of the Work**

Provide the Engineer a minimum 24 hours’ notice for work requiring inspection or testing.

The progress schedule format shall be critical path method unless otherwise directed.

**Item 6 - Control of Materials**

To comply with the latest provisions of Build America, Buy America Act (BABA Act) of the Bipartisan Infrastructure Law, the contractor must submit an original of the TxDOT Construction Material Buy America Certification Form for all items classified as construction materials. This form is not required for materials classified as a manufactured product.

Refer to the Buy America Material Classification Sheet for clarification on material categorization.

The Buy America Material Classification Sheet is located at the below link.

<https://www.txdot.gov/business/resources/materials/buy-america-material-classification-sheet.html> for clarification on material categorization.

**Item 7 - Legal Relations and Responsibilities**

Roadway closures during the following key dates and/or special events are prohibited:

Hotter’n Hell Hundred Bike Race/Ride (August)  
 Check the following website for event schedule [www.hh100.org/](http://www.hh100.org/)

The Contractor’s Responsible Person (CRP) as described in item 7.2.6.1 must be able to respond within 45 minutes of being notified.

**Item 8 - Prosecution and Progress**

Progress schedule format shall be critical path method unless otherwise directed.

**Item Specific****Item 351 – Flexible Pavement Structure Repair**

Complete full depth repair locations in one day and reopen to traffic. No full depth repair locations will be left open overnight unless otherwise directed.

Provide asphalt concrete pavement Type B - PG 64-22.

All placement testing of HMAC for pavement structure repair will be waived as directed by the Engineer.

**Item 354 – Planing and Texturing Pavement**

Refer to the Hot Mix Longitudinal Joint Detail for all edge treatments. This work will be considered subsidiary to item 354.

Construct butt joints at locations where planing, inlay, and overlay operations begin and end. Butt joints shall be 100' in length unless otherwise shown on the plans or directed by the Engineer.

Use caution when performing milling and hot mix operations around drop inlets and manholes and water valves located within the project. Repair any damage caused by contractor operations as directed by the engineer. This work will be considered subsidiary to the milling bid item on the contract.

At Railroad Crossings, mill as close as possible to the existing track. Place hot mix to match the elevations of the existing track.

Contact Jack Kelsey at the district signal shop at (940) 720-7769 two weeks before performing any milling operations around the intersections of SS 447 and Indiana/ Oak Street to coordinate signal loop issues.

Contractor shall submit a plan of proposed planing operations to the Engineer for approval prior to commencing work. Plan the planing operations in a manner that will prevent a vertical edge of 2 inches or greater from being open to traffic overnight.

Planing operations shall be conducted so as to permit the broken white centerline to remain as long as possible.

Multiple mobilizations may be required to perform all milling operations. No additional payment will be made for multiple mobilizations.

The Northbound inside lane where the manholes are located shall be milled last. The Northbound inside lane will not be allowed to be open to traffic until after the overlay operations have been completed in this lane. The lane closure should be kept to the minimum necessary.

Clean and sweep the pavement as directed by the Engineer after the milling operation and prior to the tack coat and overlay.

Stockpile material produced from this operation at the intersection of US 287 and Rifle Range Road at Latitude 33.957902, Longitude -98.620118.

**Item 361 – Full-Depth Repair of Concrete Pavement**

There have not been any locations identified needing full-depth repair during field visit. However, a quantity has been added to cover problem areas that might be found after the planing operation.

Pavement repair should take place after the planing operation and prior to final hot mix overlay.

**Item 432 – Riprap**

Saw cut pavement edges along the proposed mow strip locations to create a smooth joint between the roadway and mow strip. This work shall be subsidiary to item 432.

The use of synthetic fibers will not be permitted in the mow strip for any locations on this project. Use #3 rebar or approved wire mesh for steel reinforcement.

**Item 502 - Barricades, Signs, and Traffic Handling**

Contractor shall store all traffic control devices not currently being used at a location approved by the Engineer.

The Traffic Control Plan (TCP) for this project includes the plans, the Texas Manual on Traffic Control Devices, Barricade and Construction Standard Sheets, Standard TCP Sheets, and as otherwise required by the Engineer.

The Contractor's person responsible for TCP compliance is available by local telephone 24 hours a day and must respond to traffic control needs within 45 minutes of being notified.

Work will not be permitted without adequate traffic control devices in place. Work will only be permitted on one side of the roadway at any time. The contractor will be required to perform all paving operations in the same direction as the direction of traffic.

The Contractor Force Account "Safety Contingency" that has been established for this project is intended to be utilized for work zone enhancements, to improve the effectiveness of the Traffic Control Plan, that could not be foreseen in the project planning and design stage. These enhancements will be mutually agreed upon by the Engineer and the Contractor's Responsible Person based on weekly or more frequent traffic management reviews on the project. The Engineer may choose to use existing bid items if it does not slow the implementation of enhancement.

Work vehicles within 30 feet of the traveled way shall have strobe lights or rotating beacons in use.

Wear appropriate personal protective equipment at all times while outside of vehicles and equipment on the project.

Contractor shall not set up traffic control at multiple locations. All work and traffic control operations shall be complete prior to advancing to next location unless otherwise directed by the Engineer.

Provide adequate flagging on side roads to ensure that traffic flow is not compromised during traffic control operations.

Repair barricades within 48 hours after barricade report has been delivered to the Contractor. Failure to comply will cease all work until barricades are repaired to the satisfaction of the Department. Replace all damaged traffic control devices immediately. Remove any damaged traffic control devices from the project within 24 hours.

Failure to make necessary corrections to Traffic Control items based on barricade inspections will be cause for withholding the monthly estimate until such corrections are made.

Remove from the roadway and store in a central location approved by the Engineer all temporary traffic control devices, such as cones, barrels, portable signs, vertical panels, etc., which will not be used within 24 hours. This includes removal of temporary traffic control devices from the roadway over the weekend.

Refer to the "Treatment for Various Edge Conditions" for the proper traffic control devices to be used for the various edge conditions.

Place portable CW 21-2 "FRESH OIL" signs prior to the placing of asphalt onto roadway and remove signs when they are no longer needed.

Cover or remove portable CW 8-12 "NO CENTER STRIPE" signs immediately upon completion of striping of the roadway.

When traffic backs up behind the placement of striping and/or raised pavement markers, cease operations, and pull over to alleviate vehicle queues every 1 mile or every 10 minutes whichever comes first.

Perform all construction work in daylight hours unless the engineer approves nighttime work in writing. Do not allow any construction equipment to be placed on the roadway until 30 minutes after sunrise and ensure that all construction equipment is removed from the roadway 30 minutes before sunset. Sunrise and sunset times will be as determined by NOAA at the following website <https://gml.noaa.gov/grad/solcalc/sunrise.html>

### Item 506 - Temporary Erosion, Sedimentation, and Environmental Controls

Install erosion control devices as shown in the plans or as directed by the Engineer. In the event that other erosion control measures are needed, the storm water pollution and prevention plan (SW3P) for this project shall consist of using the following items:

1. Erosion Control Logs
2. Permanent Seeding
3. Vegetative Watering

If it is determined that other erosion control devices are needed, payment for the work will be determined in accordance with Article 4.4, "Changes in the Work".

### Item 530 - Intersections, Driveways, and Turnouts

Sideroad locations, lengths, and widths shall be verified by the Engineer before placement.

Saw cut existing sideroads to create a smooth joint with the overlaid roadway surface.

### Item 540 – Metal Beam Guard Fence

There several ground boxes adjacent to the guardrail and concrete mow strip for illumination. Use caution when performing installation of proposed guardrail and mow strip. Repair any damage caused by contractor operations as directed by the engineer. This work will be considered subsidiary to the various bid item on the contract.

Contact the district signal shop at (940) 720-7700 two weeks before performing any guardrail work near ground boxes to coordinate.

### Item 542 – Removing Metal Beam Guard Fence

Removed existing rail elements, timber and metal posts shall become the property of the contractor and removed from the project.

### Item 585 – Ride Quality for Pavement Surfaces

Use Surface Test Type B pay adjustment schedule 3 on this project.

### Item 644 – Small Roadside Sign Assemblies

Triangular slip bases must be the clamp style to secure the post to the slip base. Set screw style slip bases will not be allowed. Construction of required concrete footings shall be subsidiary to item 644.

Highway: SS 447

Control: 0156-12-020

Contractor is responsible for verifying sign locations prior to final placement. Stake sign support locations for verification by the engineer and obtain approval from the engineer prior to placement of sign supports.

**Item 666 - Reflectorized Pavement Markings**

Poly-dot the locations of the proposed reflectorized pavement markings and obtain approval from the Engineer prior to placement.

Use Type II beads on all striping.

Remove temporary tabs from all roads prior to striping. Removal of tabs will be subsidiary to item 666.

The lead vehicle and trail vehicle will be required for all striping operations as shown on TCP (3-2)-13.

**Item 672 - Raised Pavement Markers**

Raised pavement marker adhesive will meet the requirements of Departmental Materials Specifications DMS-6130, "Bituminous Adhesive for Pavement Markers".

The lead vehicle and trail vehicle(s) will be required for all marker installation operations as shown on TCP(3-3)-14.

**Item 3077 – Superpave Mixtures**

In accordance with Production Sampling the sampler will split each sample into three (3) equal portions in accordance with TEX-200-F and label these portions as "Contractor", "Engineer", and "Referee". Deliver Engineer and Referee samples to the Wichita Falls Area Office Laboratory for testing.

A material transfer vehicle (MTV) will be required for all overlay operations unless otherwise directed. When paving of outside shoulder, the use of the MTV may be waived when approved by the Engineer.

The Contractor will not be permitted to windrow hot mix material on the final surface, including adjacent concrete pavement.

Provide mixture Type D using PG binder 70-28. No Substitute PG Binder will be allowed on this project.

The first day of production will be limited to 1000 tons. Any cost or delays associated to this requirement shall not be paid for directly but shall be considered subsidiary to this item.

Highway: SS 447


Control: 0156-12-020

The use of Recycled Asphalt Shingles (RAS) or Recycled Asphalt Pavement (RAP) will not be permitted in the surface mix for this project.

**Item 3084 – Bonding Course**


Spray paver will not be used unless otherwise authorized by the Engineer.

FILE: D:\w\dot\projectwise\online.com: TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/20/2024 5:24:01 PM

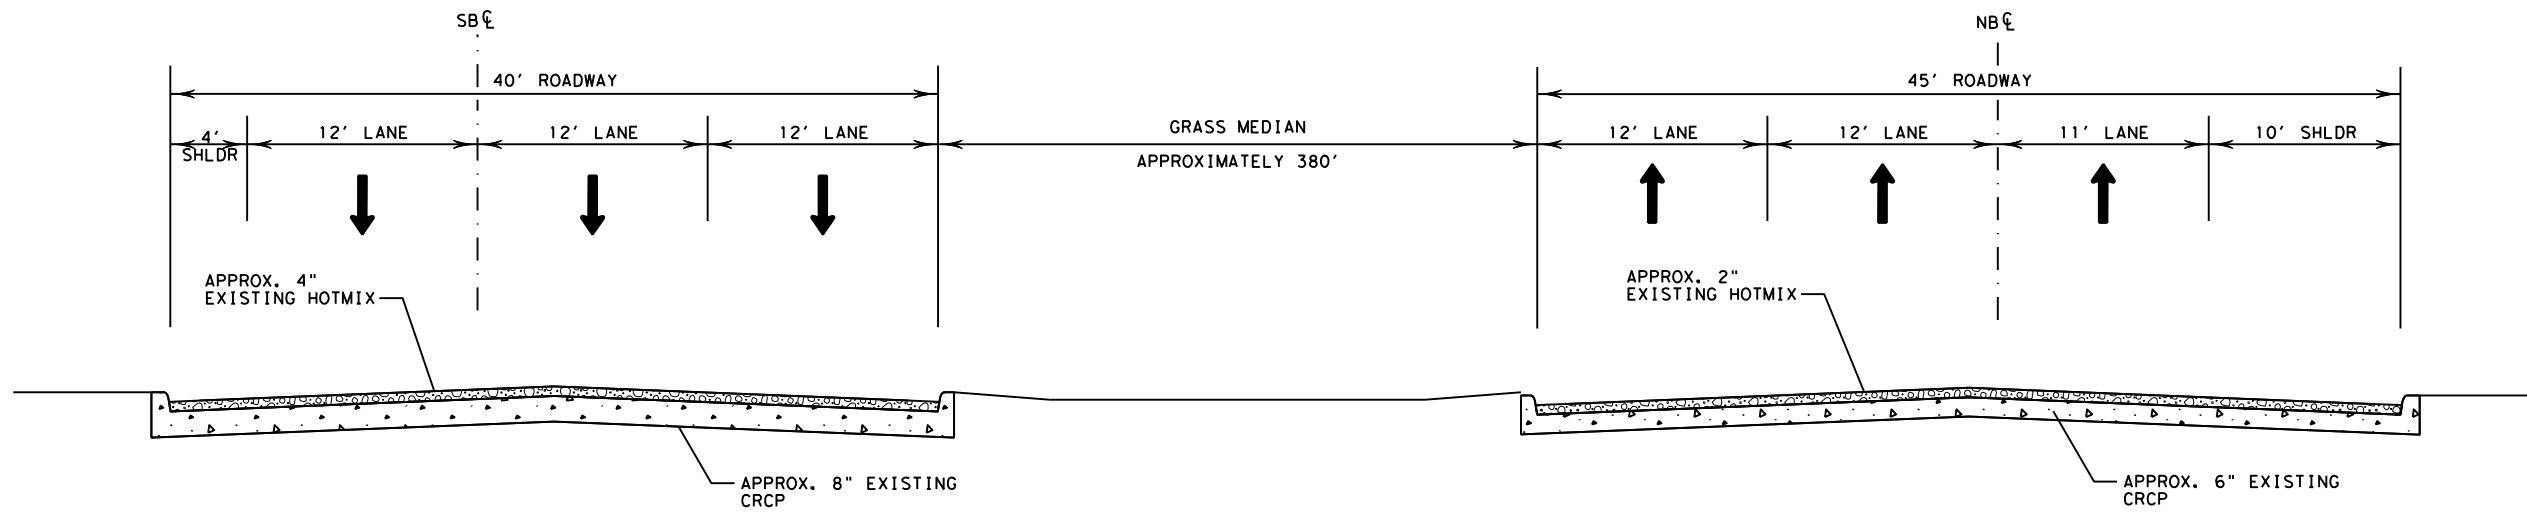

EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 STA. 535+87.00 TO STA. 543+19.00

EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 535+85.00 TO STA. 544+66.00  
 STA. 547+52.00 TO STA. 549+12.00

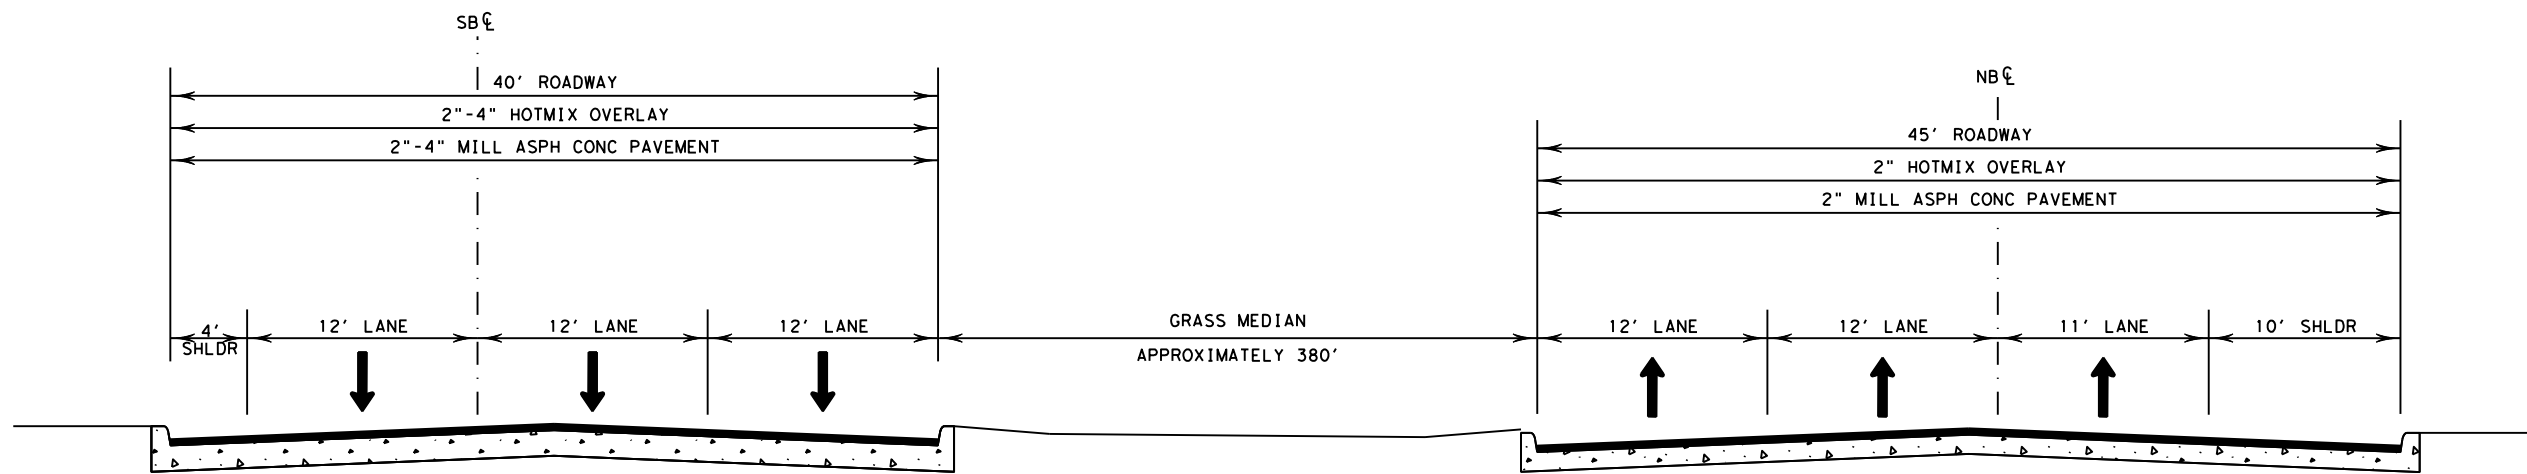

PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 STA. 535+87.00 TO STA. \*543+19.00

PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 535+85.00 TO STA. 544+66.00  
 STA. 547+52.00 TO STA. 549+12.00

NOTES:  
 PERFORM PAVEMENT REPAIR AFTER PLANING  
 BUT BEFORE HOTMIX OPERATIONS OPERATIONS.  
 MARK PROPOSED PAVEMENT REPAIR LOCATIONS  
 FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.  
  
 MAKE SURE FINAL OVERLAY SURFACE IS FLUSH  
 WITH EXISTING MANHOLE AND WATER VALVE  
 COVERS.

NOTES:  
 \* THE MAJORITY OF THIS SECTION OF  
 PAVEMENT CONSIST OF 2" HOTMIX ON TOP OF  
 CONCRETE. THICKNESS MAY VARY WHEN  
 APPROACHING BURNETT STREET. MILL AS  
 CLOSE TO THE CONCRETE LAYER AS POSSIBLE  
 WITHOUT DAMAGING THE CONCRETE.


Bryson Lawrence, P.E.  
 03/26/2024  
 TYPICAL  
 SECTIONS  
 N. T. S.  
 Texas Department of Transportation

SP 447


SHEET 1 OF 8

CONT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	7	


FILE: D:\w\project\wiseonline.com:TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/20/2024 4:24:28 PM

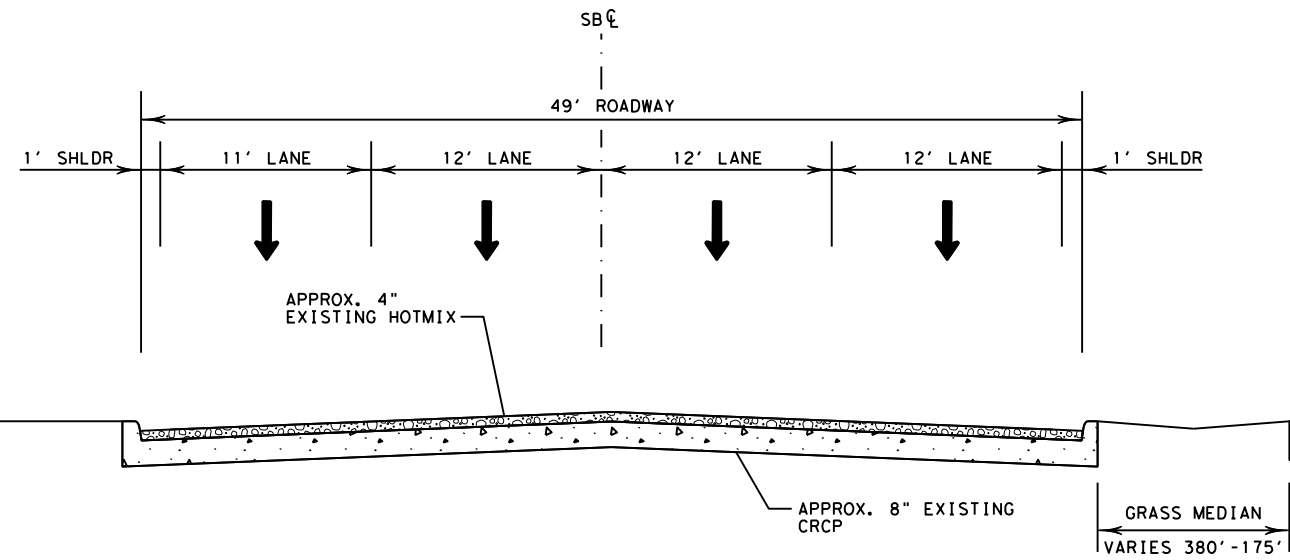


EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 STA. 543+19.00 TO STA. 551+17.00

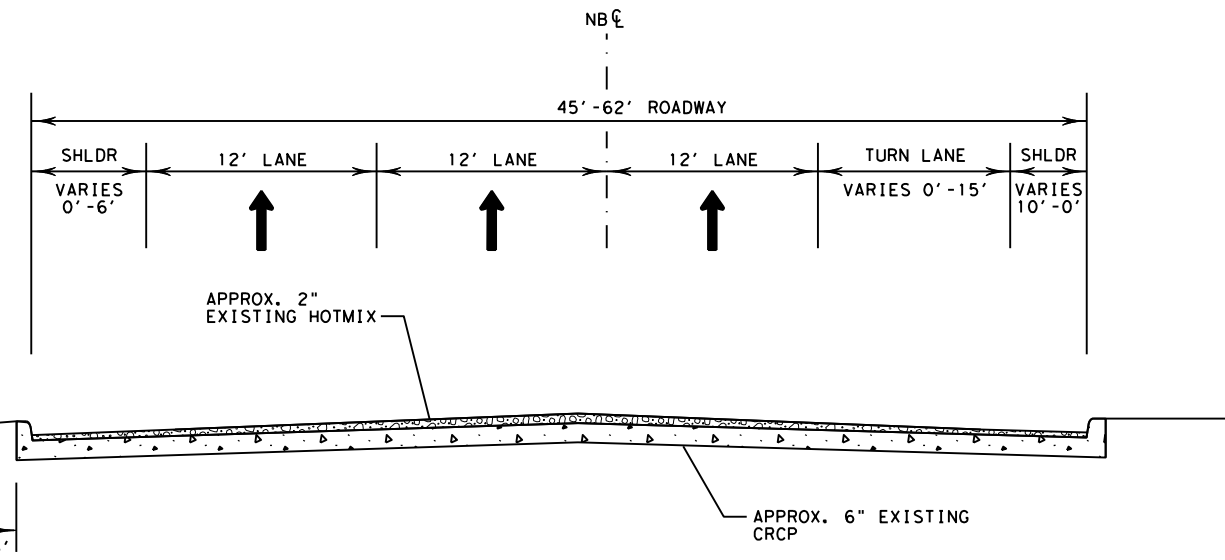


EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 544+66.00 TO STA. 547+52.00

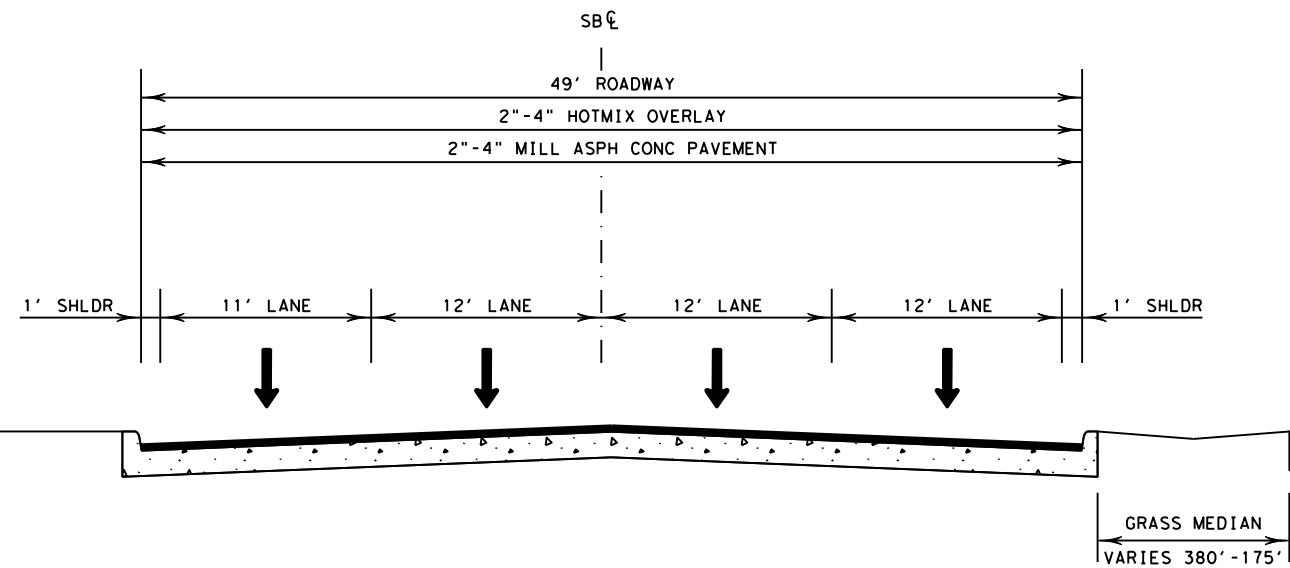

PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 STA. 543+19.00 TO STA. 551+17.00

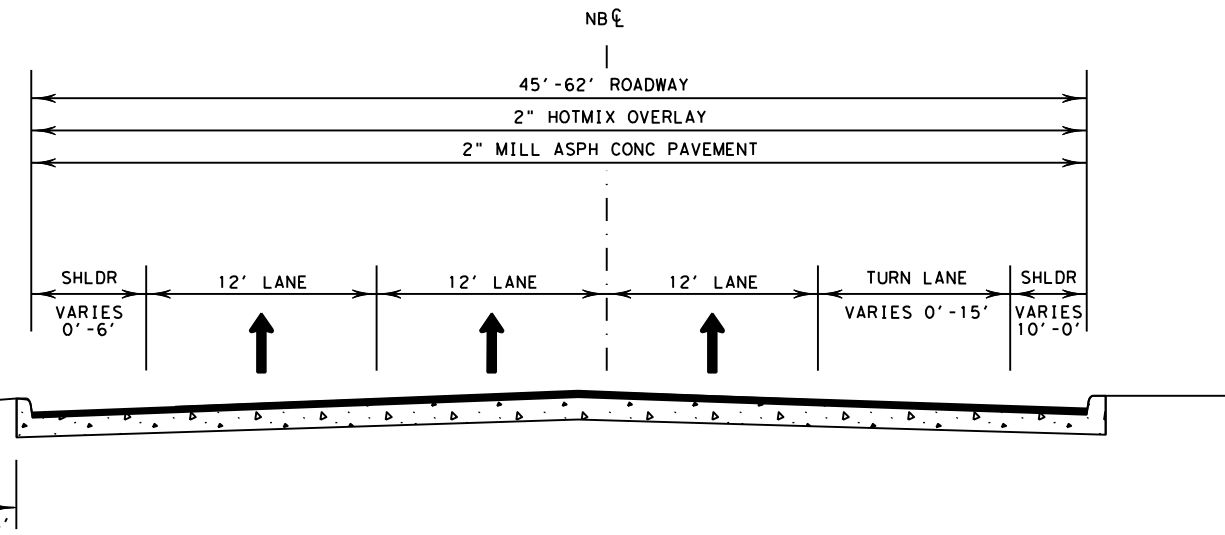


PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 544+66.00 TO STA. 547+52.00

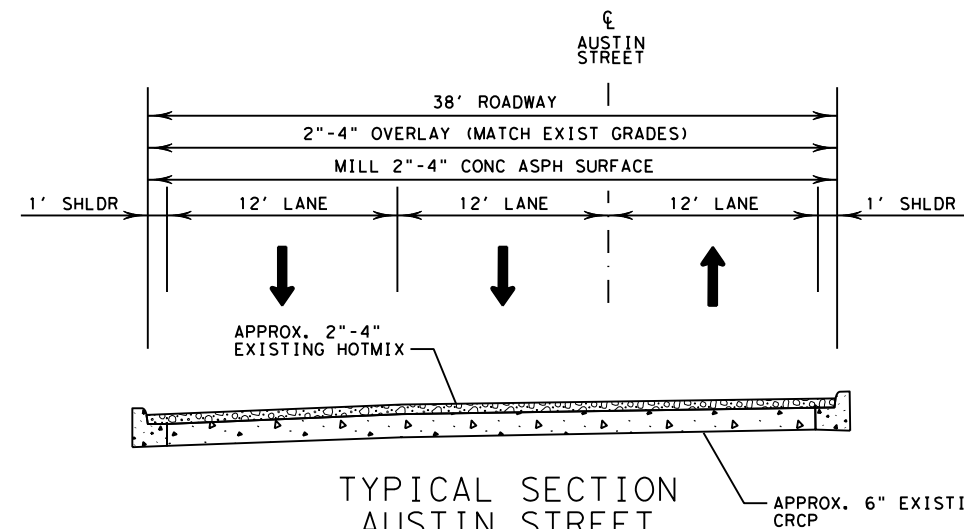

TYPICAL SECTION  
 AUSTIN STREET


NOTES:  
 PERFORM PAVEMENT REPAIR AFTER PLANING  
 BUT BEFORE HOTMIX OPERATIONS OPERATIONS.  
 MARK PROPOSED PAVEMENT REPAIR LOCATIONS  
 FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.  
  
 MAKE SURE FINAL OVERLAY SURFACE IS FLUSH  
 WITH EXISTING MANHOLE AND WATER VALVE  
 COVERS.

NOTES:  
 \* THE MAJORITY OF THIS SECTION OF  
 PAVEMENT CONSIST OF 2" HOTMIX ON TOP OF  
 CONCRETE. THICKNESS MAY VARY WHEN  
 APPROACHING BURNETT STREET. MILL AS  
 CLOSE TO THE CONCRETE LAYER AS POSSIBLE  
 WITHOUT DAMAGING THE CONCRETE.



Bryson Lawrence, P.E.

03/26/2024  
 TYPICAL  
 SECTIONS  
 N. T. S.




SP 447

SHEET 2 OF 8

CONT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	8	




FILE: p:\w\project\wiseonline.com:TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/20/2024 5:25:17 PM

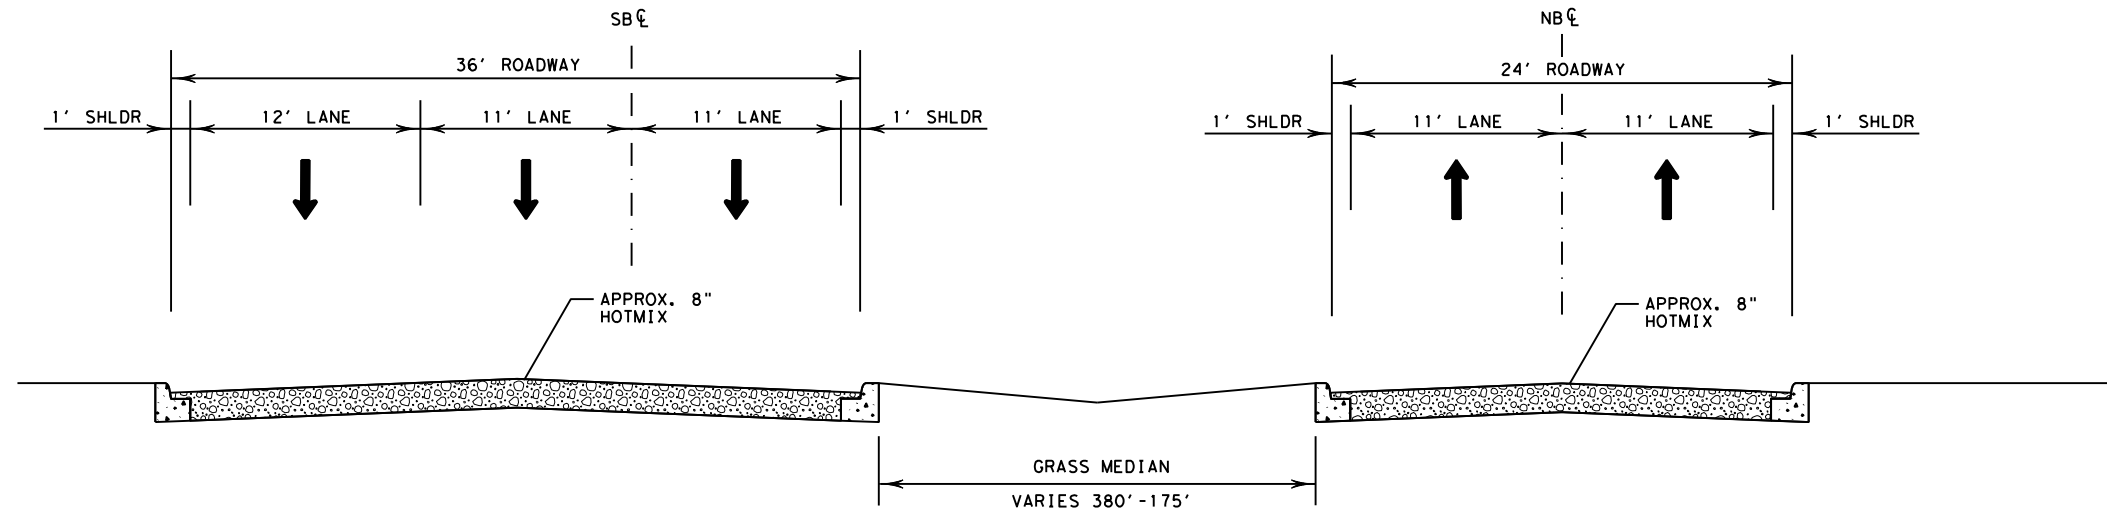


EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 STA. 551+17.00 TO STA. 556+90.00

EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 549+12.00 TO STA. 562+74.00

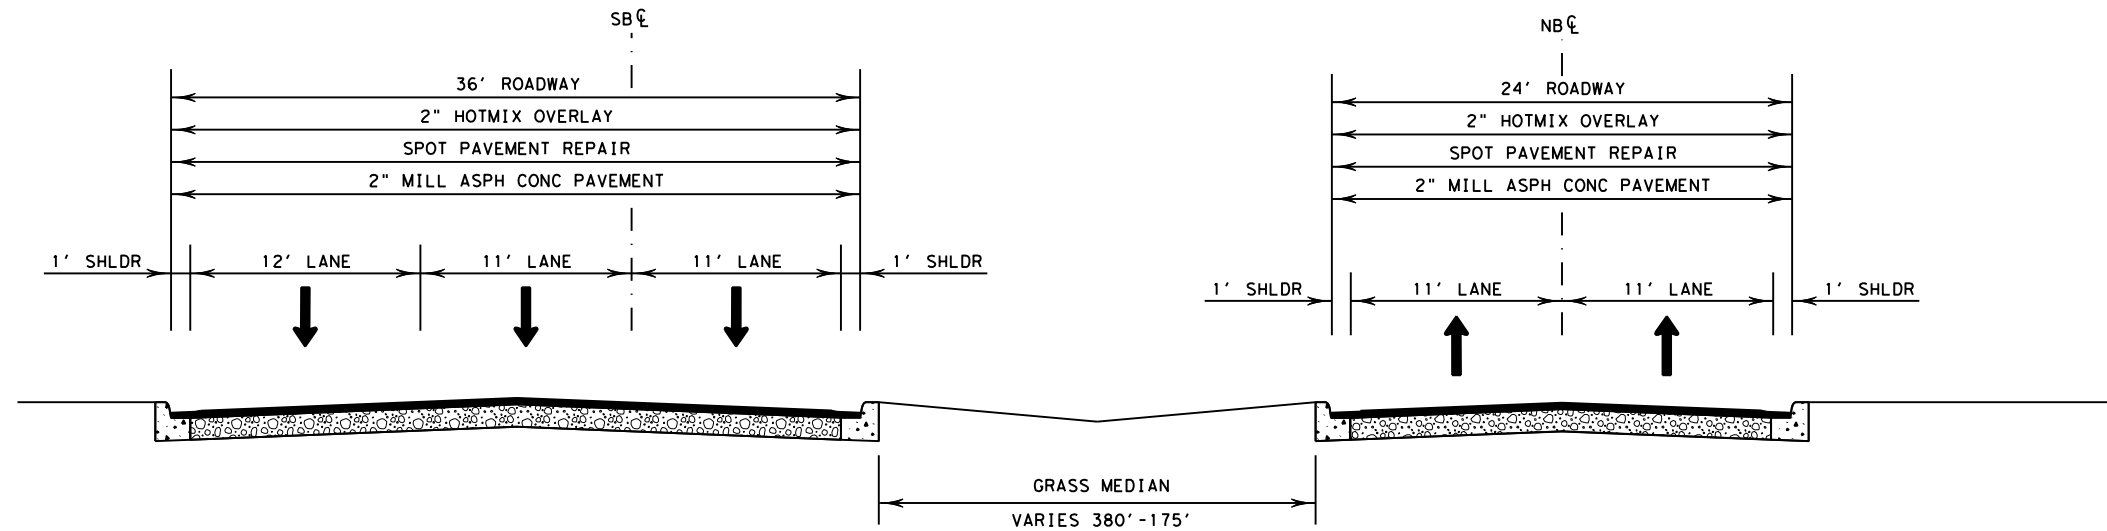

PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 STA. 551+17.00 TO STA. 556+90.00


PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 549+12.00 TO STA. 562+74.00

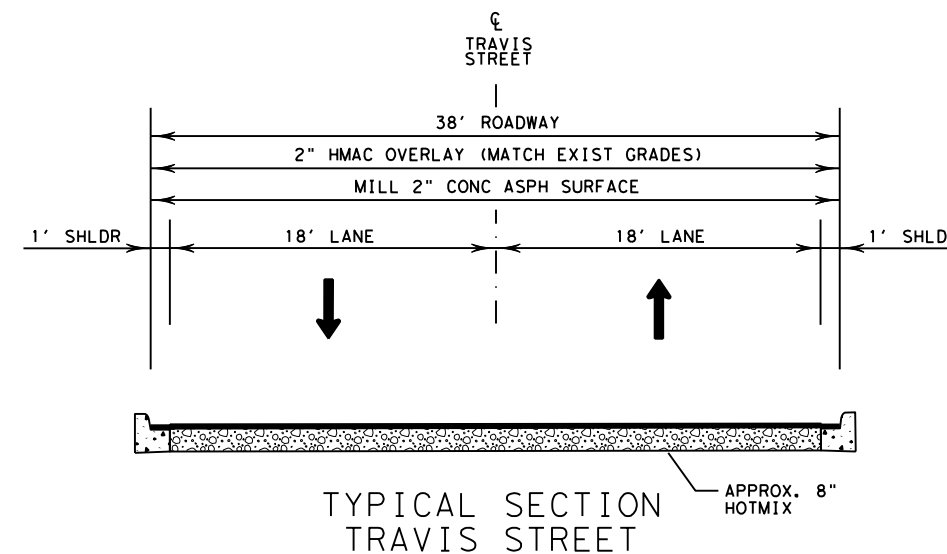

TYPICAL SECTION  
 TRAVIS STREET

NOTES:  
 PERFORM PAVEMENT REPAIR AFTER PLANING  
 BUT BEFORE HOTMIX OPERATIONS OPERATIONS.  
 MARK PROPOSED PAVEMENT REPAIR LOCATIONS  
 FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.


MAKE SURE FINAL OVERLAY SURFACE IS FLUSH  
 WITH EXISTING MANHOLE AND WATER VALVE  
 COVERS.



Bryson Lawrence, P.E.

03/26/2024

TYPICAL  
 SECTIONS  
 N. T. S.




SP 447


SHEET 3 OF 8

COWT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	9	


FILE: D:\w\project\wiseonline.com\TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/22/2024 3:36 PM

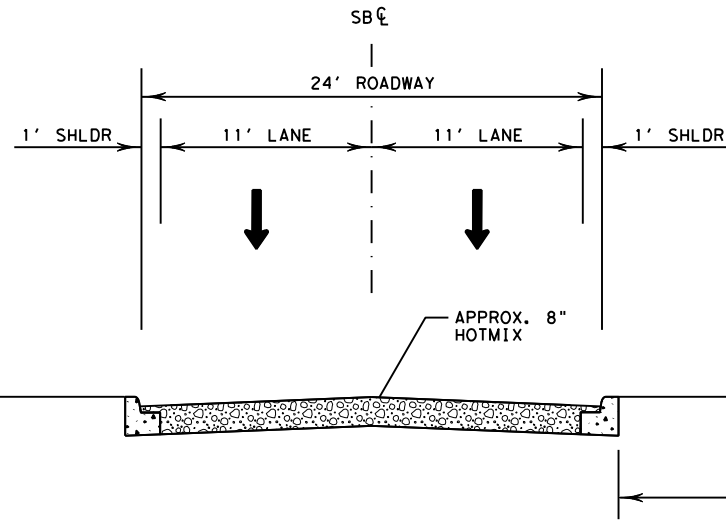


EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 SOUTHBOUND STA. 556+90.00 TO STA. 562+02.00  
 SOUTHBOUND STA. 565+00.00 TO STA. 569+01.00

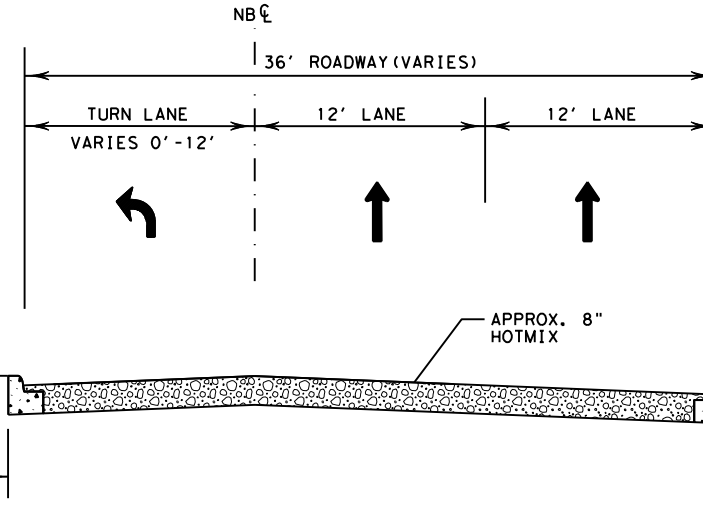

EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 562+74.00 TO STA. 564+58.00  
 STA. 569+20.00 TO STA. 572+06.00

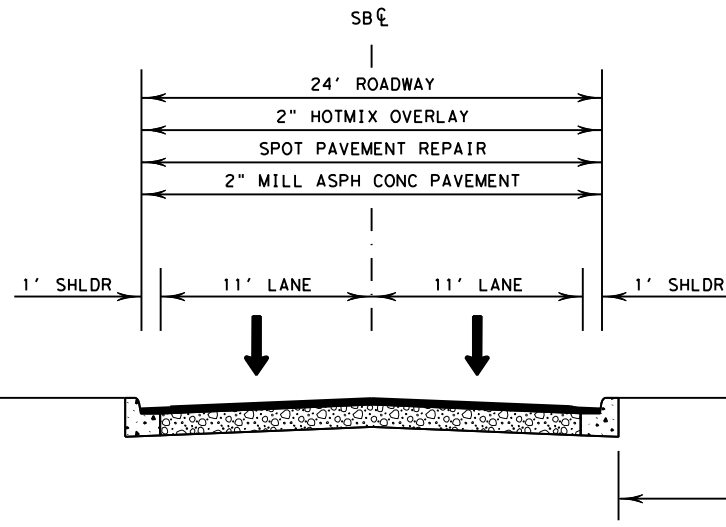

PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 SOUTHBOUND STA. 556+90.00 TO STA. 562+02.00  
 SOUTHBOUND STA. 565+00.00 TO STA. 569+01.00

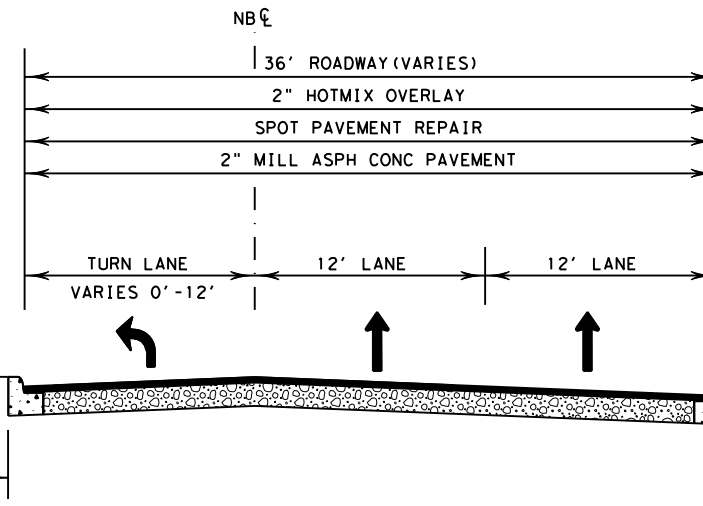

PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 562+74.00 TO STA. 564+58.00  
 STA. 569+20.00 TO STA. 572+06.00

NOTES:  
 PERFORM PAVEMENT REPAIR AFTER PLANING  
 BUT BEFORE HOTMIX OPERATIONS OPERATIONS.  
 MARK PROPOSED PAVEMENT REPAIR LOCATIONS  
 FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.

MAKE SURE FINAL OVERLAY SURFACE IS FLUSH  
 WITH EXISTING MANHOLE AND WATER VALVE  
 COVERS.


Bryson Lawrence, P.E.  
 03/26/2024  
 TYPICAL  
 SECTIONS  
 N. T. S.  
 Texas Department of Transportation

SP 447

SHEET 4 OF 8


CONT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	10	

FILE: D:\w\dot\project\wiseonline.com\TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/22/2024 4:34:17 PM

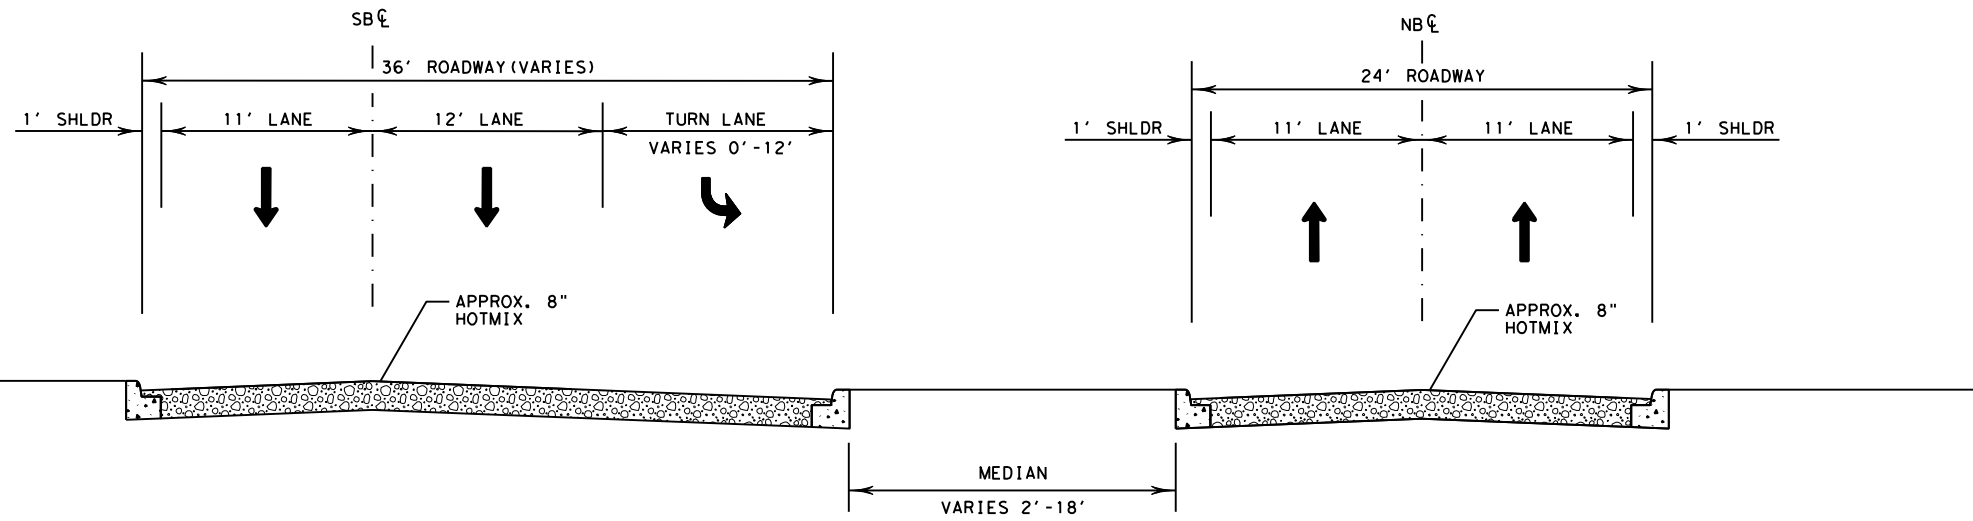

EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 STA. 562+02.00 TO STA. 565+00.00

EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 564+58.00 TO STA. 569+20.00

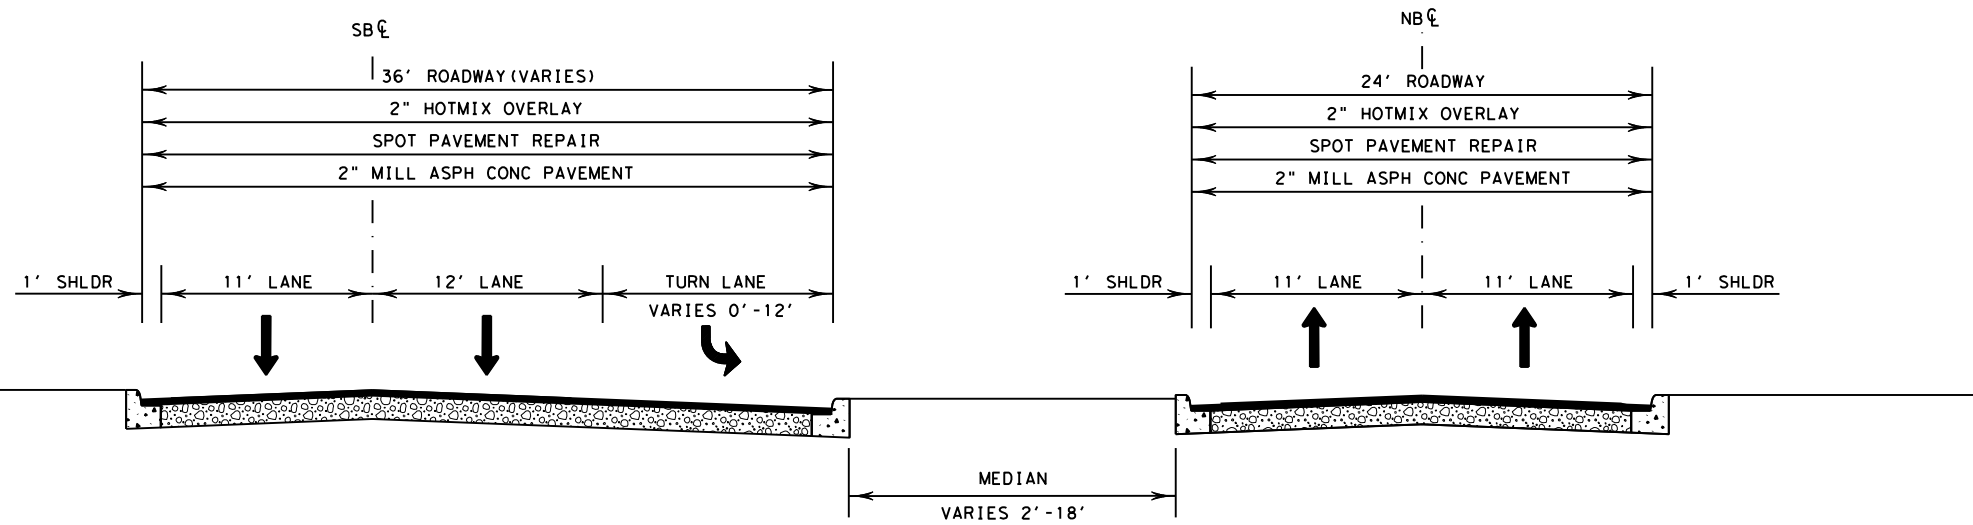



PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 STA. 562+02.00 TO STA. 565+00.00

PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 564+58.00 TO STA. 569+20.00

NOTES:  
 PERFORM PAVEMENT REPAIR AFTER PLANING  
 BUT BEFORE HOTMIX OPERATIONS OPERATIONS.  
 MARK PROPOSED PAVEMENT REPAIR LOCATIONS  
 FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.

MAKE SURE FINAL OVERLAY SURFACE IS FLUSH  
 WITH EXISTING MANHOLE AND WATER VALVE  
 COVERS.

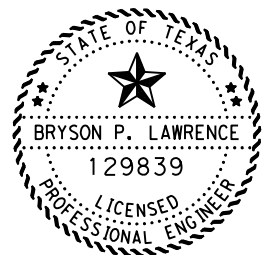
  
 Bryson Lawrence, P.E.  
 03/26/2024  
**TYPICAL  
 SECTIONS**  
 N. T. S.  


SP 447


SHEET 5 OF 8

CONT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	11	


FILE: D:\w\dot\project\wiseon\line.com:TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/22/2024 4:34:39 PM

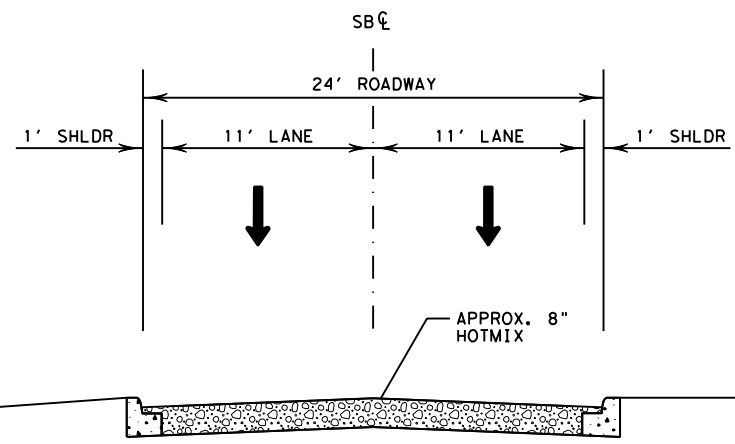


EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 STA. 570+65.00 TO STA. 578+04.00

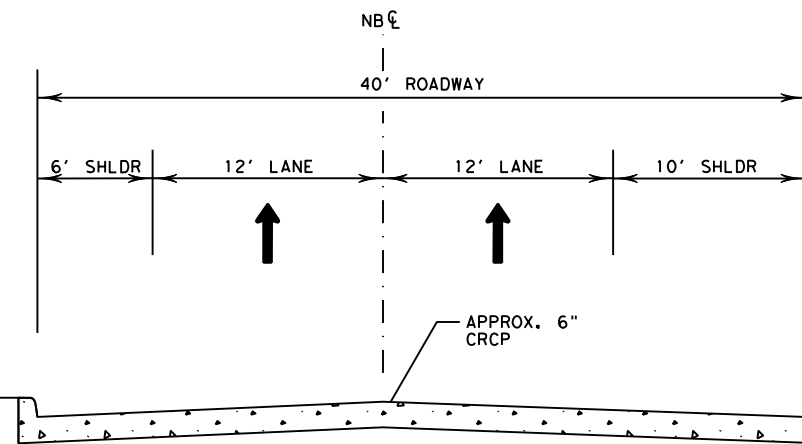

EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 572+06.00 TO STA. 576+80.00

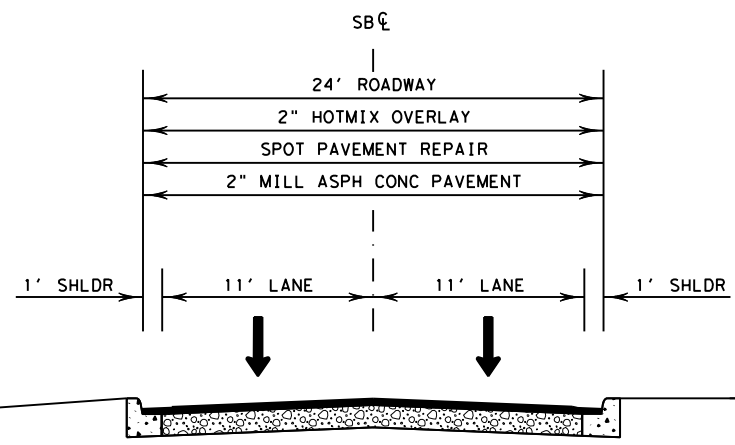



PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 STA. 570+65.00 TO STA. 578+04.00

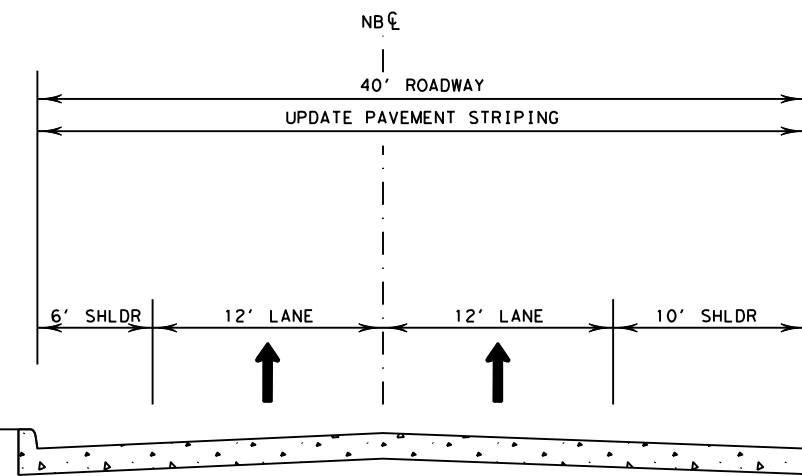

PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 572+06.00 TO STA. 576+80.00

NOTES:  
 PERFORM PAVEMENT REPAIR AFTER PLANING  
 BUT BEFORE HOTMIX OPERATIONS OPERATIONS.  
 MARK PROPOSED PAVEMENT REPAIR LOCATIONS  
 FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.

MAKE SURE FINAL OVERLAY SURFACE IS FLUSH  
 WITH EXISTING MANHOLE AND WATER VALVE  
 COVERS.

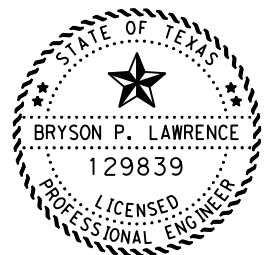
  
 Bryson Lawrence, P.E.  
 03/26/2024  
**TYPICAL  
 SECTIONS**  
 N. T. S.  


SP 447


SHEET 6 OF 8

CONT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	12	


FILE: p:\w\+xdot\projectwise\online.com: TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/22/2024 4:35:05 PM

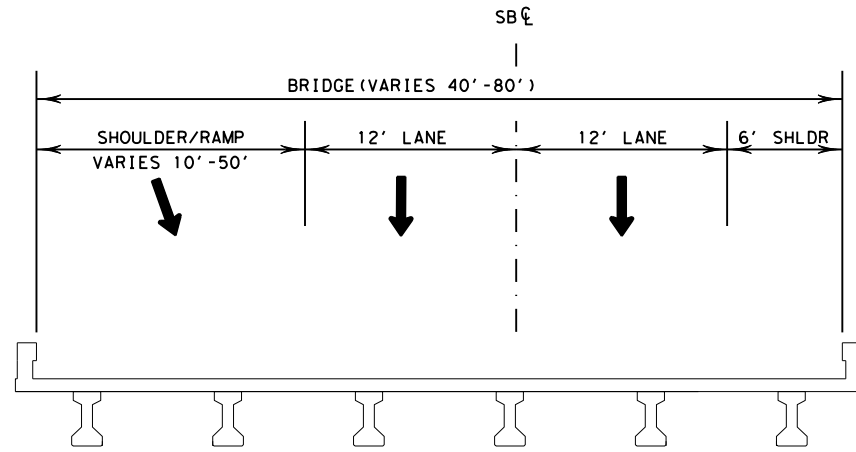


EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 STA. 578+04.00 TO STA. 588+62.00  
 STA. 591+84.00 TO STA. 594+84.00

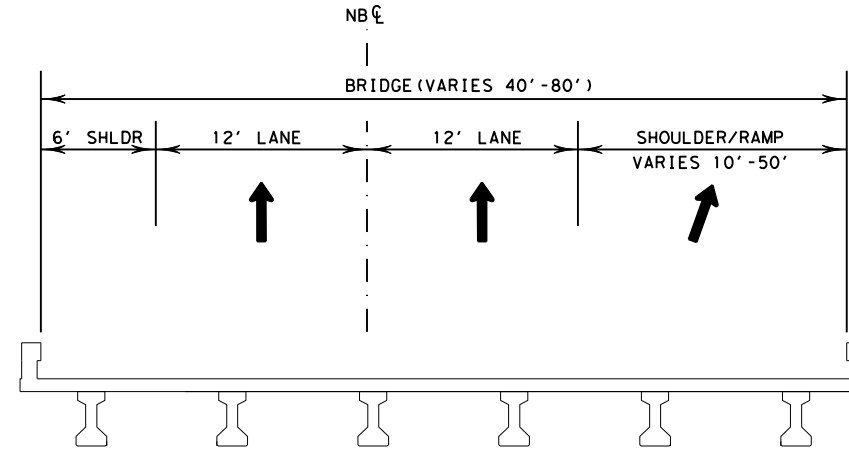

EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 576+80.00 TO STA. 590+88.00  
 STA. 594+14.00 TO STA. 597+14.00

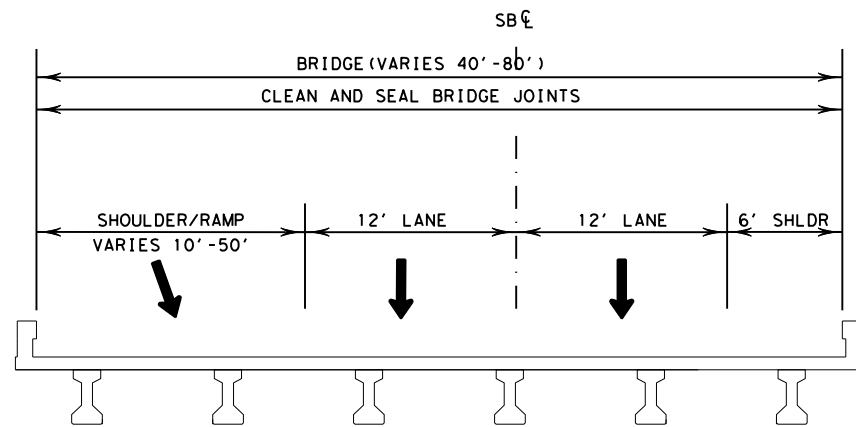

PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 STA. 578+04.00 TO STA. 588+62.00  
 STA. 591+84.00 TO STA. 594+84.00

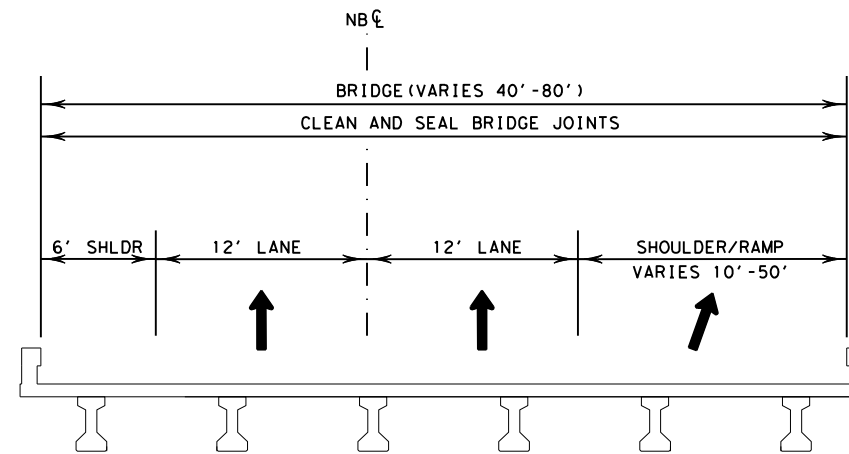

PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 576+80.00 TO STA. 590+88.00  
 STA. 594+14.00 TO STA. 597+14.00

Bryson Lawrence, P.E.

03/26/2024


TYPICAL  
 SECTIONS  
 N. T. S.

Texas Department of Transportation

SP 447


SHEET 7 OF 8			
CONT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST		COUNTY	SHEET NO.
WFS		WICHITA	13

FILE: D:\w\dot\project\wiseonline.com\TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\TYPICAL SECTIONS  
 DATE: 3/22/2024 4:35:43 PM

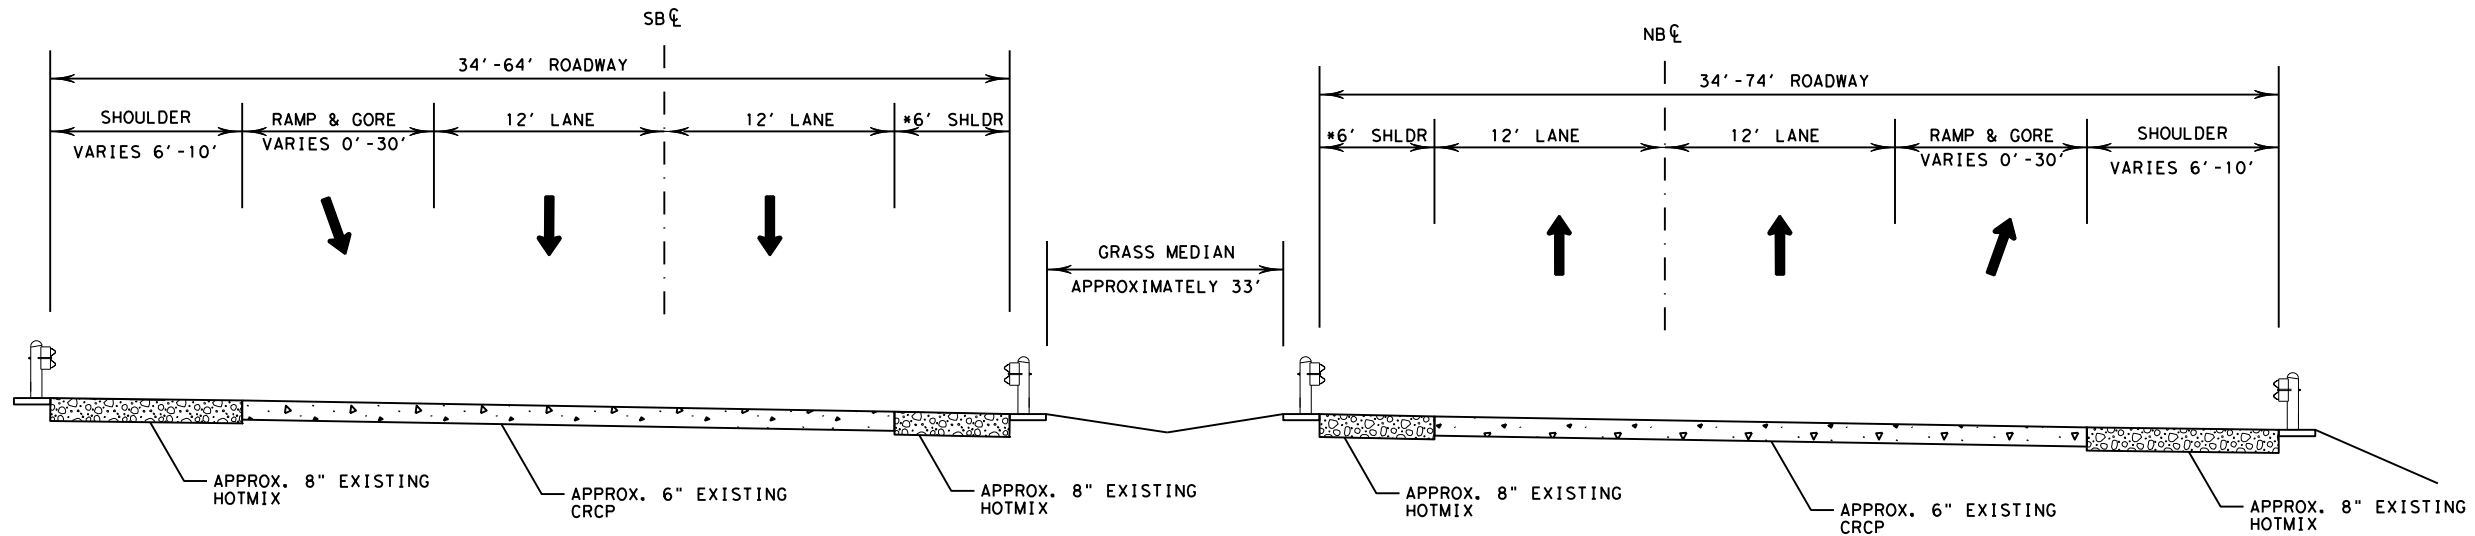

EXISTING SOUTHBOUND  
 TYPICAL SECTION  
 STA. 588+62.00 TO STA. 591+84.00  
 STA. 594+84.00 TO STA. 604+72.00

EXISTING NORTHBOUND  
 TYPICAL SECTION  
 STA. 590+88.00 TO STA. 594+14.00  
 STA. 597+14.00 TO STA. 606+43.00

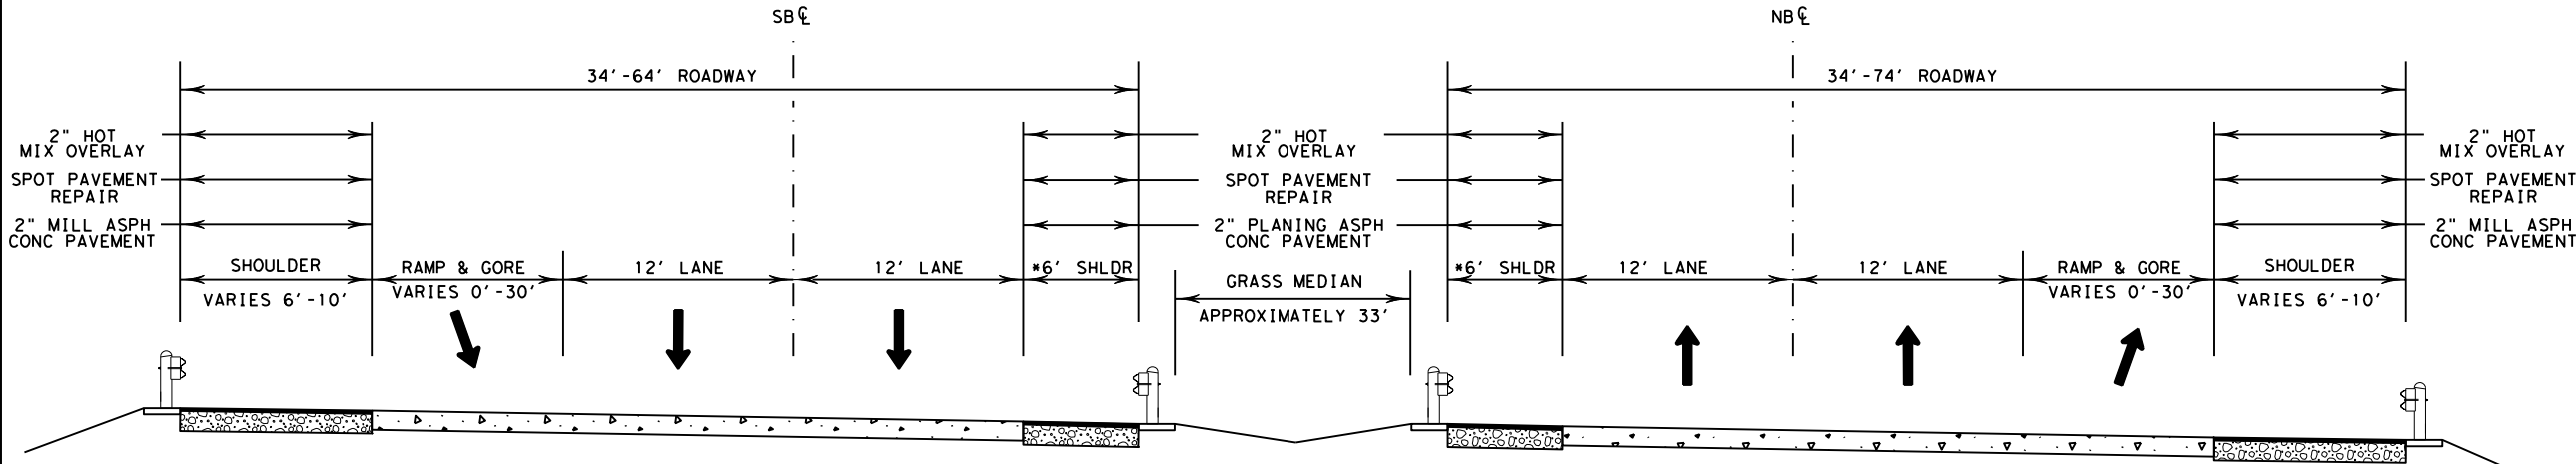

PROPOSED SOUTHBOUND  
 TYPICAL SECTION  
 STA. 588+62.00 TO STA. 591+84.00  
 STA. 594+84.00 TO STA. 604+72.00

PROPOSED NORTHBOUND  
 TYPICAL SECTION  
 STA. 590+88.00 TO STA. 594+14.00  
 STA. 597+14.00 TO STA. 606+43.00

NOTES:  
 PERFORM PAVEMENT REPAIR AFTER PLANING  
 BUT BEFORE HOTMIX OPERATIONS OPERATIONS.  
 MARK PROPOSED PAVEMENT REPAIR LOCATIONS  
 FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.

MAKE SURE FINAL OVERLAY SURFACE IS FLUSH  
 WITH EXISTING MANHOLE AND WATER VALUE  
 COVERS.

\*EXISTING SHOULDER NARROWS IN A FEW  
 LOCATIONS.  
 INSTALL NEW INSIDE SHOULDER AT 6FT WIDE.

STATE OF TEXAS  
 BRYSON P. LAWRENCE  
 129839  
 LICENSED PROFESSIONAL ENGINEER  
 Bryson Lawrence, P.E.  
 03/27/2024  
 TYPICAL SECTIONS  
 N. T. S.  
 Texas Department of Transportation

SP 447

SHEET 8 OF 8

CONT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	14	



# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0156-12-020

DISTRICT Wichita Falls  
HIGHWAY SS 447

COUNTY Wichita

CONTROL SECTION JOB				0156-12-020		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00194663			
COUNTY				Wichita			
HIGHWAY				SS 447			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	104-6022	REMOVING CONC (CURB AND GUTTER)	LF	45.000		45.000	
	104-6054	REMOVING CONCRETE(MOW STRIP)	LF	2,850.000		2,850.000	
	134-6002	BACKFILL (TY B)	STA	25.000		25.000	
	164-6005	BROADCAST SEED (PERM) (URBAN) (SANDY)	SY	3,150.000		3,150.000	
	168-6001	VEGETATIVE WATERING	MG	26.500		26.500	
	314-6009	EMULS ASPH (EROSN CONT)(MULTI)	GAL	788.000		788.000	
	351-6004	FLEXIBLE PAVEMENT STRUCTURE REPAIR(8")	SY	2,300.000		2,300.000	
	354-6004	PLAN & TEXT ASPH CONC PAV(0" TO 4")	SY	38,328.000		38,328.000	
	361-6002	FULL - DEPTH REPAIR CRCP (8")	SY	280.000		280.000	
	432-6045	RIPRAP (MOW STRIP)(4 IN)	CY	119.800		119.800	
	438-6004	CLEANING AND SEALING EXIST JOINTS(CL7)	LF	2,474.000		2,474.000	
	500-6001	MOBILIZATION	LS	1.000		1.000	
	502-6001	BARRICADES, SIGNS AND TRAFFIC HANDLING	MO	8.000		8.000	
	506-6040	BIODEG EROSN CONT LOGS (IN STL) (8")	LF	2,650.000		2,650.000	
	506-6043	BIODEG EROSN CONT LOGS (REMOVE)	LF	2,650.000		2,650.000	
	529-6008	CONC CURB & GUTTER (TY II)	LF	195.000		195.000	
	530-6002	INTERSECTIONS (ACP)	SY	1,964.000		1,964.000	
	540-6001	MTL W-BEAM GD FEN (TIM POST)	LF	2,356.000		2,356.000	
	540-6006	MTL BEAM GD FEN TRANS (THRIE-BEAM)	EA	13.000		13.000	
	540-6016	DOWNSTREAM ANCHOR TERMINAL SECTION	EA	4.000		4.000	
	540-6037	MTL BM GD FEN TRANS (ANCHOR PLATE)	EA	13.000		13.000	
	542-6001	REMOVE METAL BEAM GUARD FENCE	LF	2,308.000		2,308.000	
	542-6002	REMOVE TERMINAL ANCHOR SECTION	EA	4.000		4.000	
	544-6001	GUARDRAIL END TREATMENT (INSTALL)	EA	5.000		5.000	
	544-6003	GUARDRAIL END TREATMENT (REMOVE)	EA	5.000		5.000	
	644-6001	IN SM RD SN SUP&AM TY10BWG(1)SA(P)	EA	6.000		6.000	
	658-6013	IN STL DEL ASSM (D-SW)SZ (BRF)CTB	EA	60.000		60.000	
	658-6061	IN STL DEL ASSM (D-SW)SZ 1(BRF)GF2	EA	38.000		38.000	
	662-6109	WK ZN PAV MRK SHT TERM (TAB)TY W	EA	1,100.000		1,100.000	
	662-6110	WK ZN PAV MRK SHT TERM (TAB)TY Y	EA	48.000		48.000	
	666-6035	REFL PAV MRK TY I (W)8"(SLD)(090MIL)	LF	2,925.000		2,925.000	
	666-6137	REFL PAV MRK TY I (Y)8"(SLD)(090MIL)	LF	90.000		90.000	
	666-6167	REFL PAV MRK TY II (W) 4" (BRK)	LF	3,230.000		3,230.000	
	666-6225	PAVEMENT SEALER 6"	LF	9,348.000		9,348.000	
	666-6226	PAVEMENT SEALER 8"	LF	1,643.000		1,643.000	
	666-6230	PAVEMENT SEALER 24"	LF	198.000		198.000	
	666-6305	RE PM W/RET REQ TY I (W)6"(BRK)(090MIL)	LF	4,290.000		4,290.000	

DISTRICT	COUNTY	CCSJ	SHEET
Wichita Falls	Wichita	0156-12-020	15



# Estimate & Quantity Sheet

CONTROLLING PROJECT ID 0156-12-020

DISTRICT Wichita Falls

COUNTY Wichita

HIGHWAY SS 447

CONTROL SECTION JOB				0156-12-020		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00194663			
COUNTY				Wichita			
HIGHWAY				SS 447			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	666-6308	RE PM W/RET REQ TY I (W)6"(SLD)(090MIL)	LF	15,266.000		15,266.000	
	666-6320	RE PM W/RET REQ TY I (Y)6"(SLD)(090MIL)	LF	14,820.000		14,820.000	
	668-6074	PREFAB PAV MRK TY C (W) (12") (SLD)	LF	183.000		183.000	
	668-6076	PREFAB PAV MRK TY C (W) (24") (SLD)	LF	608.000		608.000	
	668-6077	PREFAB PAV MRK TY C (W) (ARROW)	EA	4.000		4.000	
	668-6085	PREFAB PAV MRK TY C (W) (WORD)	EA	4.000		4.000	
	668-6091	PREFAB PAV MRK TY C (W) (18")(YLD TRI)	EA	16.000		16.000	
	672-6009	REFL PAV MRKR TY II-A-A	EA	10.000		10.000	
	672-6010	REFL PAV MRKR TY II-C-R	EA	441.000		441.000	
	677-6001	ELIM EXT PAV MRK & MRKS (4")	LF	9,348.000		9,348.000	
	677-6003	ELIM EXT PAV MRK & MRKS (8")	LF	1,643.000		1,643.000	
	677-6007	ELIM EXT PAV MRK & MRKS (24")	LF	198.000		198.000	
	677-6008	ELIM EXT PAV MRK & MRKS (ARROW)	EA	2.000		2.000	
	684-6028	TRF SIG CBL (TY A)(14 AWG)(2 CONDR)	LF	598.000		598.000	
	688-6005	VEH LP DETECT (SAWCUT)(14 AWG)(BLK)	LF	110.000		110.000	
	3077-6059	SP MIXES SP-D SAC-B PG70-28	TON	4,642.000		4,642.000	
	3084-6001	BONDING COURSE	GAL	2,301.000		2,301.000	
	6185-6002	TMA (STATIONARY)	DAY	102.000		102.000	
	6185-6005	TMA (MOBILE OPERATION)	DAY	11.000		11.000	
	18	SAFETY CONTINGENCY: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	
		EROSION CONTROL MAINTENANCE: CONTRACTOR FORCE ACCOUNT WORK (PART)	LS	1.000		1.000	
		RAILROAD FLAGGING: CONTRACTOR FORCE ACCOUNT WORK (PARTICIPATING)	LS	1.000		1.000	



DATE: 3/22/2024 5:26:37 PM  
 FILE: P:\t\dot\project\wiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\QUANTITY SUMMARY.dgn

SUMMARY OF WORKZONE TRAFFIC CONTROL ITEMS					
LOCATION	662 6109	662 6110	666 6167	6185 6002	6185 6005
	WK ZN PAV MRK SHT TERM (TAB)TY W	WK ZN PAV MRK SHT TERM (TAB)TY Y	REFL PAV MRK TY II (W) 4" (BRK)	TMA (STATIONA RY)	TMA (MOBILE OPERATION)
	EA	EA	LF	DAY	DAY
North Bound	500	24	1440	51	11
South Bound	600	24	1790	51	
<b>PROJECT TOTALS</b>	<b>1100</b>	<b>48</b>	<b>3230</b>	<b>102</b>	<b>11</b>

SUMMARY OF EROSION CONTROL ITEMS					
LOCATION	506 6040	506 6043	164 6005	168 6001	314 6009
	BIODEG EROSN CONT LOGS (INSTL) (8")	BIODEG EROSN CONT LOGS (REMOVE)	BROADCAST SEED (PERM) (URBAN) (SANDY)	VEGETATIVE WATERING	EMULS ASPH (EROSN CONT)(MUL TI)
	LF	LF	SY	MG	GAL
SS 447	2650	2650	3150	26.5	788
<b>PROJECT TOTALS</b>	<b>2650</b>	<b>2650</b>	<b>3150</b>	<b>26.5</b>	<b>788</b>


SUMMARY OF ROADWAY ITEMS																							
LOCATION	104 6022	104 6054	134 6002	351 6004	354 6004	361 6002	432 6045	438 6004	529 6008	530 6002	540 6001	540 6006	540 6016	540 6037	542 6001	542 6002	544 6001	544 6003	658 6013	658 6061	3077 6067	3084 6001	
	REMOVING CONC (CURB AND GUTTER)	REMOVING CONCRETE (MOW STRIP)	BACKFILL (TY B)	FLEXIBLE PAVEMENT STRUCTURE REPAIR(8")	PLAN & TEXT ASPH CONC PAV(0" TO 4")	FULL - DEPTH REPAIR CRCP (8")	RIPRAP (MOW STRIP)(4 IN)	CLEANING AND SEALING EXIST JOINTS(CL 7)	CONC CURB & GUTTER (TY II)	INTERSECTI ONS (ACP)	MTL W-BEAM GD FEN (TIM POST)	MTL BEAM GD FEN TRANS (THRIE-BE AM)	DOWNSTREAM ANCHOR TERMINAL SECTION	MTL BM GD FEN TRANS (ANCHOR PLATE)	REMOVE METAL BEAM GUARD FENCE	REMOVE TERMINAL ANCHOR SECTION	GUARDRAIL END TREATMENT (INSTALL)	GUARDRAIL END TREATMENT (REMOVE)	INSTL DEL ASSM (D-SW) SZ (BRF) CTB	INSTL DEL ASSM (D-SW) SZ (BRF) GF2	SP MIXES SP-D PG76-28	BONDING COURSE	
	LF	LF	STA	SY	SY	SY	CY	LF	LF	SY	LF	EA	EA	EA	LF	EA	EA	EA	EA	EA	EA	TON	GAL
NORTH BOUND	30	760	12.5	800	19351	140	85.9	1289	120	1019	598	9		9	598		2	2	25	10	1987	1161	
SOUTH BOUND	15	2090	12.5	1500	18977	140	33.9	1185	75	945	1758	4	4	4	1710	4	3	3	35	28	2656	1140	
<b>PROJECT TOTALS</b>	<b>45</b>	<b>2850</b>	<b>25</b>	<b>2300</b>	<b>38328</b>	<b>280</b>	<b>119.8</b>	<b>2474</b>	<b>195</b>	<b>1964</b>	<b>2356</b>	<b>13</b>	<b>4.00</b>	<b>13</b>	<b>2308</b>	<b>4</b>	<b>5</b>	<b>5</b>	<b>60</b>	<b>38</b>	<b>4642</b>	<b>2301</b>	

SUMMARY OF PAVEMENT MARKING ITEMS																			
LOCATION	666 6035	666 6137	666 6225	666 6226	666 6230	666 6305	666 6308	666 6320	668 6074	668 6076	668 6077	668 6085	668 6091	672 6009	672 6010	677 6001	677 6003	677 6007	677 6008
	REFL PAV MRK TY I (W)8"(SLD ) (090MIL)	REFL PAV MRK TY I (Y)8"(SLD ) (090MIL)	PAVEMENT SEALER 6"	PAVEMENT SEALER 8"	PAVEMENT SEALER 24"	RE PM W/RET REQ TY I (W)6"(BRK ) (090MIL)	RE PM W/RET REQ TY I (W)6"(SLD ) (090MIL)	RE PM W/RET REQ TY I (Y)6"(SLD ) (090MIL)	PREFAB PAV MRK TY C (W) (12") (SLD)	PREFAB PAV MRK TY C (W) (24") (SLD)	PREFAB PAV MRK TY C (W) (ARROW)	PREFAB PAV MRK TY C (W) (WORD)	PREFAB PAV MRK TY C (W) (18") (YLD TRI)	REFL PAV MRKR TY II-A-A	REFL PAV MRKR TY II-C-R	ELIM EXT PAV MRK & MRKS (4")	ELIM EXT PAV MRK & MRKS (8")	ELIM EXT PAV MRK & MRKS (24")	ELIM EXT PAV MRK & MRKS (ARROW)
	LF	LF	LF	LF	LF	LF	LF	LF	LF	LF	EA	EA	EA	EA	EA	LF	LF	LF	EA
SS 447 PROJECT	2925	90	9348	1643	198	4290	15266	14820	183	608	4	4	16	10	441	9348	1643	198	2
<b>PROJECT TOTALS</b>	<b>2925</b>	<b>90</b>	<b>9348</b>	<b>1643</b>	<b>198</b>	<b>4290</b>	<b>15266</b>	<b>14820</b>	<b>183</b>	<b>608</b>	<b>4</b>	<b>4</b>	<b>16</b>	<b>10</b>	<b>441</b>	<b>9348</b>	<b>1643</b>	<b>198</b>	<b>2</b>

SUMMARY OF SIGNING ITEMS	
LOCATION	644 6001
	IN SM RD SN SUP&AM TY10BWG(1) SA(P)
	EA
SS 447 NB NEAR AUSTIN STREET	1
SS 447 SB NEAR TRAVIS STREET	1
SS 447 NB NEAR AUSTIN STREET	1
SS 447 SB NEAR BURNETT STREET	1
SS 447 SB NEAR BLUFF STREET	1
SS 447 SB APPROACHING SCOTT STREET	1
<b>PROJECT TOTALS</b>	<b>6</b>

SUMMARY OF TRAFFIC SIGNAL ITEMS		
LOCATION	684 6028	688 6005
	TRF SIG CBL (TY A)(14 AWG)(2 CONDR)	VEH LP DETECT (SAWCUT) (14 AWG)(BLK)
	LF	LF
SS 447 NB AT OAK STREET	355	30
SS 447 SB AT INDIANA AVE.	243	80
<b>PROJECT TOTALS</b>	<b>598</b>	<b>110</b>

**SS 447  
QUANTITY  
SUMMARY**

© 2024  
  
 SHEET 1 OF 1


CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY		SHEET NO.
WFS	WICHITA		17

SS 447 SIDE ROAD SUMMARY

PLAN LAYOUT SHEET NUMBER	SIDE ROAD NUMBER	DESCRIPTION	LOCATION		"W"	"L"	RADII		AREA	354	530	Comments
										6004	6002	
										PLAN & TEXT ASPH CONC PAV(0" TO 4")	INTERSECTIONS (ACP)	
			STA	SIDE	FT	FT	R1	R2	SY	SY	SY	
44	1	BLUFF ST	539+41	LT	40	13	15	15	69	69	69	
	2	BLUFF ST	540+00	RT	33	20	20	30	105	105	105	
	3	BURNETT ST	543+47	LT	40	10	15	15	56	56	56	
	4	BURNETT ST	544+01	RT	40	20	20	20	108	108	108	
45	5	AUSTIN ST	547+52	LT								Milling and Overlay included under roadway item totals.
	6	AUSTIN ST CROSS OVER	548+52	RT								Milling and Overlay included under roadway item totals.
	7	AUSTIN ST CROSS OVER	548+07	LT								Milling and Overlay included under roadway item totals.
	8	AUSTIN ST	548+07	RT								Milling and Overlay included under roadway item totals.
	9	NB EXIT TO FT WORTH ST	549+12	RT	20	80	4	0	179	179	179	
	10	TRAVIS ST	551+58	LT								Milling and Overlay included under roadway item totals.
	11	TRAVIS ST CROSS OVER	551+58	RT								Milling and Overlay included under roadway item totals.
	12	TRAVIS ST CROSS OVER	553+08	LT								Milling and Overlay included under roadway item totals.
46	13	TRAVIS ST	553+08	RT								Milling and Overlay included under roadway item totals.
	14	LAMAR ST	556+90	LT			5		1	1	1	
	15	LAMAR ST	558+65	RT	46	41	30	18	239	239	239	
	16	SCOTT ST	562+67	LT	67	66	110	30	802	802	802	
47	17	SCOTT ST	565+00	RT	105	30	30	15	377	377	377	
	18	14TH ST	568+89	LT			15	5	6	6	6	
	19	OAK ST	572+02	RT			5	20	11	11	11	
	20	INDIANA AVE	570+64	LT			15	15	11	11	11	
PROJECT TOTALS:										1964	1964	

NOTE:  
 QUANTITIES PROVIDED ARE ESTIMATED FOR BIDDING PURPOSES ONLY.  
 FINAL QUANTITIES ARE TO BE VERIFIED BY THE CONTRACTOR IN THE FIELD.

DATE: 11/1/2023 10:31:34 PM  
 FILE: p:\w\tdot\projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\1. General\SIDEROAD\_SUMMARY.dgn



*Bryson Lawrence, P.E.*

03/26/2024

**SS 447  
 SIDE ROAD SUMMARY**



CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	18	

DATE: 10/31/2023 4:29:59 PM  
 FILE: P:\t\tdot\projectwiseonline.com\TXDOT12\Documents\03 - WFS/Design Projects\01561202\Set/2-TCP/BC-21.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard into a digital format or for any damage or damages resulting from its use.

**BARRICADE AND CONSTRUCTION (BC) STANDARD SHEETS GENERAL NOTES:**

- The Barricade and Construction Standard Sheets (BC sheets) are intended to show typical examples for placement of temporary traffic control devices, construction pavement markings, and typical work zone signs. The information contained in these sheets meet or exceed the requirements shown in the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- The development and design of the Traffic Control Plan (TCP) is the responsibility of the Engineer.
- The Contractor may propose changes to the TCP that are signed and sealed by a licensed professional engineer for approval. The Engineer may develop, sign and seal Contractor proposed changes.
- The Contractor is responsible for installing and maintaining the traffic control devices as shown in the plans. The Contractor may not move or change the approximate location of any device without the approval of the Engineer.
- Geometric design of lane shifts and detours should, when possible, meet the applicable design criteria contained in manuals such as the American Association of State Highway and Transportation Officials (AASHTO), "A Policy on Geometric Design of Highways and Streets," the TxDOT "Roadway Design Manual" or engineering judgment.
- When projects abut, the Engineer(s) may omit the END ROAD WORK, TRAFFIC FINES DOUBLE, and other advance warning signs if the signing would be redundant and the work areas appear continuous to the motorists. If the adjacent project is completed first, the Contractor shall erect the necessary warning signs as shown on these sheets, the TCP sheets or as directed by the Engineer. The BEGIN ROAD WORK NEXT X MILES sign shall be revised to show appropriate work zone distance.
- The Engineer may require duplicate warning signs on the median side of divided highways where median width will permit and traffic volumes justify the signing.
- All signs shall be constructed in accordance with the details found in the "Standard Highway Sign Designs for Texas," latest edition. Sign details not shown in this manual shall be shown in the plans or the Engineer shall provide a detail to the Contractor before the sign is manufactured.
- The temporary traffic control devices shown in the illustrations of the BC sheets are examples. As necessary, the Engineer will determine the most appropriate traffic control devices to be used.
- Where highway construction or maintenance work is being undertaken, other than mobile operations as defined by the Texas Manual on Uniform Traffic Control Devices, CSJ limit signs are required. CSJ limit signs are shown on BC(2). The OBEY WARNING SIGNS STATE LAW sign, STAY ALERT TALK OR TEXT LATER and the WORK ZONE TRAFFIC FINES DOUBLE sign with plaque shall be erected in advance of the CSJ limits. The BEGIN ROAD WORK NEXT X MILES, CONTRACTOR and END ROAD WORK signs shall be erected at or near the CSJ limits. For mobile operations, CSJ limit signs are not required.
- Traffic control devices should be in place only while work is actually in progress or a definite need exists.
- The Engineer has the final decision on the location of all traffic control devices.
- Inactive equipment and work vehicles, including workers' private vehicles must be parked away from travel lanes. They should be as close to the right-of-way line as possible, or located behind a barrier or guardrail, or as approved by the Engineer.

**WORKER SAFETY NOTES:**

- Workers on foot who are exposed to traffic or to construction equipment within the right-of-way shall wear high-visibility safety apparel meeting the requirements of ISEA "American National Standard for High-Visibility Apparel," or equivalent revisions, and labeled as ANSI 107-2004 standard performance for Class 2 or 3 risk exposure. Class 3 garments should be considered for high traffic volume work areas or night time work.
- Except in emergency situations, flagger stations shall be illuminated when flagging is used at night.

**COMPLIANT WORKZONE TRAFFIC CONTROL DEVICES**

- Only pre-qualified products shall be used. The "Compliant Work Zone Traffic Control Devices List" (CWZTCD) describes pre-qualified products and their sources.
- Work zone traffic control devices shall be compliant with the Manual for Assessing safety Hardware (MASH).

<b>THE DOCUMENTS BELOW CAN BE FOUND ON-LINE AT</b> <a href="http://www.txdot.gov">http://www.txdot.gov</a>
COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST (CWZTCD)
DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS)
MATERIAL PRODUCER LIST (MPL)
ROADWAY DESIGN MANUAL - SEE "MANUALS (ONLINE MANUALS)"
STANDARD HIGHWAY SIGN DESIGNS FOR TEXAS (SHSD)
TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD)
TRAFFIC ENGINEERING STANDARD SHEETS

SHEET 1 OF 12




**BARRICADE AND CONSTRUCTION  
GENERAL NOTES  
AND REQUIREMENTS**

**BC (1) -21**

FILE: bc-21.dgn	DWG: TxDOT	CHK: TxDOT	APP: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS		0156	12	020
4-03	7-13			SS 447
9-07	8-14			
5-10	5-21	WFS	WICHITA	19


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions or for damages resulting from its use.  
 DATE: 10/31/2023 4:30:04 PM  
 FILE: P:\w\txdot.projects\03 - WFS\Design Projects\0302023\0302023.dwg

**TYPICAL LOCATION OF CROSSROAD SIGNS**

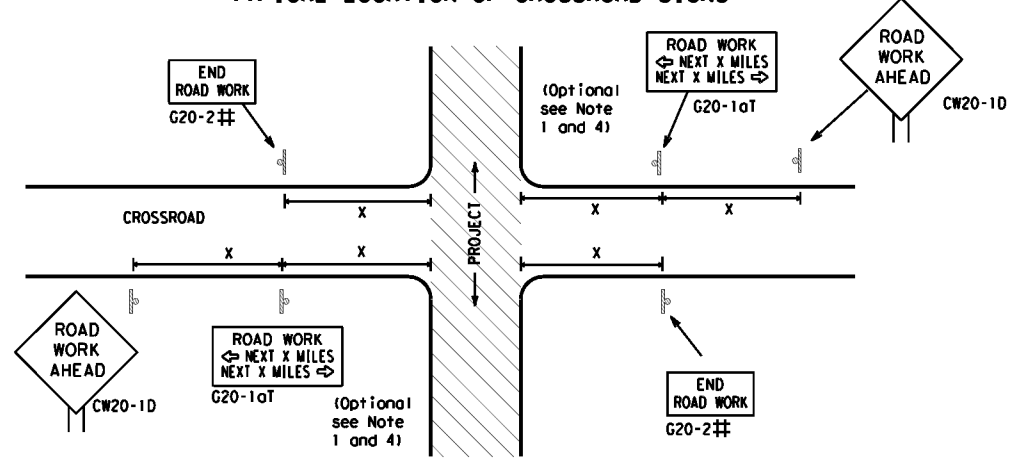

- ## May be mounted on back of "ROAD WORK AHEAD" (CW20-1D) sign with approval of Engineer. (See note 2 below)
- The typical minimum signing on a crossroad approach should be a "ROAD WORK AHEAD" (CW20-1D) sign and a (G20-2) "END ROAD WORK" sign, unless noted otherwise in plans.
  - The Engineer may use the reduced size 36" x 36" ROAD WORK AHEAD (CW20-1D) sign mounted back to back with the reduced size 36" x 18" "END ROAD WORK" (G20-2) sign on low volume crossroads (see Note 4 under "Typical Construction Warning Sign Size and Spacing"). See the "Standard Highway Sign Designs for Texas" manual for sign details. The Engineer may omit the advance warning signs on low volume crossroads. The Engineer will determine whether a road is low volume as per TMUTCD Part 5. This information shall be shown in the plans.
  - Based on existing field conditions, the Engineer/Inspector may require additional signs such as FLAGGER AHEAD, LOOSE GRAVEL, or other appropriate signs. When additional signs are required, these signs will be considered part of the minimum requirements. The Engineer/Inspector will determine the proper location and spacing of any sign not shown on the BC sheets, Traffic Control Plan sheets or the Work Zone Standard Sheets.
  - The "ROAD WORK NEXT X MILES" (G20-1aT) sign shall be required at high volume crossroads to advise motorists of the length of construction in either direction from the intersection. The Engineer will determine whether a roadway is considered high volume.
  - Additional traffic control devices may be shown elsewhere in the plans for higher volume crossroads.
  - When work occurs in the intersection area, appropriate traffic control devices, as shown elsewhere in the plans or as determined by the Engineer/Inspector, shall be in place.

**T-INTERSECTION**

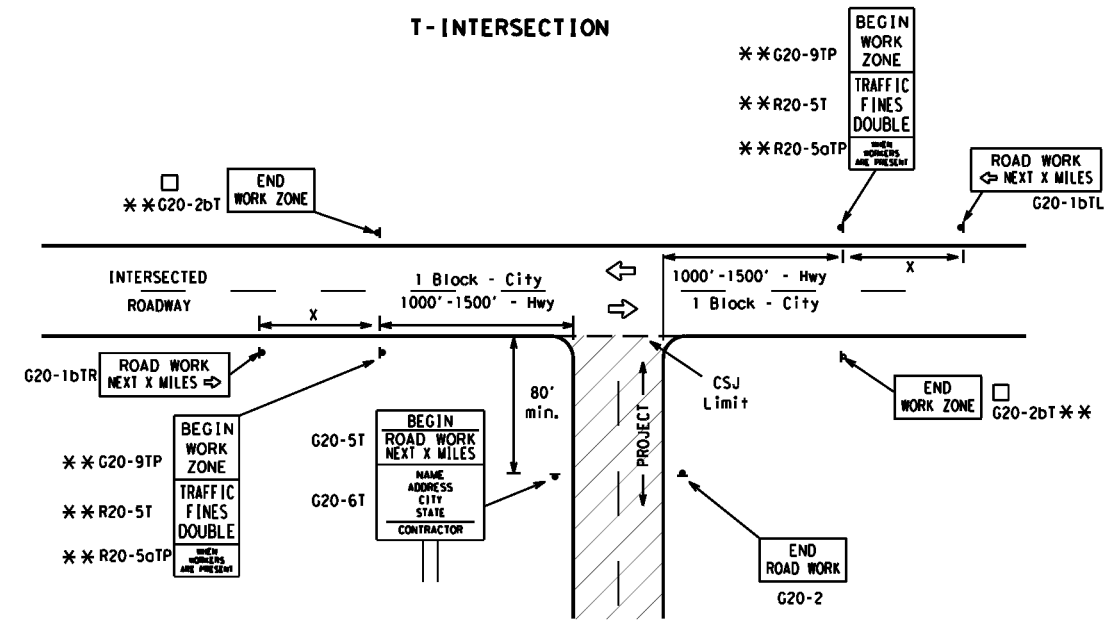

**CSJ LIMITS AT T-INTERSECTION**

- The Engineer will determine the types and location of any additional traffic control devices, such as a flagger and accompanying signs, or other signs, that should be used when work is being performed at or near an intersection.
- If construction closes the road at a T-intersection, the Contractor shall place the "CONTRACTOR NAME" (G20-6T) sign behind the Type 3 Barricades for the road closure (see BC(10) also). The "ROAD WORK NEXT X MILES" left arrow (G20-1bTL) and "ROAD WORK NEXT X MILES" right arrow (G20-1bTR) signs shall be replaced by the detour signing called for in the plans.

**TYPICAL CONSTRUCTION WARNING SIGN SIZE AND SPACING<sup>1,5,6</sup>**

Sign Number or Series	SIZE		SPACING	
	Conventional Road	Expressway/Freeway	Posted Speed MPH	Sign Δ Spacing "x" Feet (Apprx.)
CW20 <sup>4</sup>	48" x 48"	48" x 48"	30	120
CW21			35	160
CW23			40	240
CW25			45	320
CW1, CW2, CW7, CW8, CW9, CW11, CW14	36" x 36"	48" x 48"	50	400
CW3, CW4, CW5, CW6, CW8-3, CW10, CW12	48" x 48"	48" x 48"	60	600 <sup>2</sup>
			65	700 <sup>2</sup>
			70	800 <sup>2</sup>
			75	900 <sup>2</sup>
			80	1000 <sup>2</sup>
			*	* <sup>3</sup>


\* For typical sign spacings on divided highways, expressways and freeways, see Part 6 of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) typical application diagrams or TCP Standard Sheets.

Δ Minimum distance from work area to first Advance Warning sign nearest the work area and/or distance between each additional sign.

**GENERAL NOTES**


- Special or larger size signs may be used as necessary.
- Distance between signs should be increased as required to have 1500 feet advance warning.
- Distance between signs should be increased as required to have 1/2 mile or more advance warning.
- 36" x 36" "ROAD WORK AHEAD" (CW20-1D) signs may be used on low volume crossroads at the discretion of the Engineer as per TMUTCD Part 5. See Note 2 under "Typical Location of Crossroad Signs".
- Only diamond shaped warning sign sizes are indicated.
- See sign size listing in "TMUTCD", Sign Appendix or the "Standard Highway Sign Designs for Texas" manual for complete list of available sign design sizes.

**WORK AREAS IN MULTIPLE LOCATIONS WITHIN CSJ LIMITS**

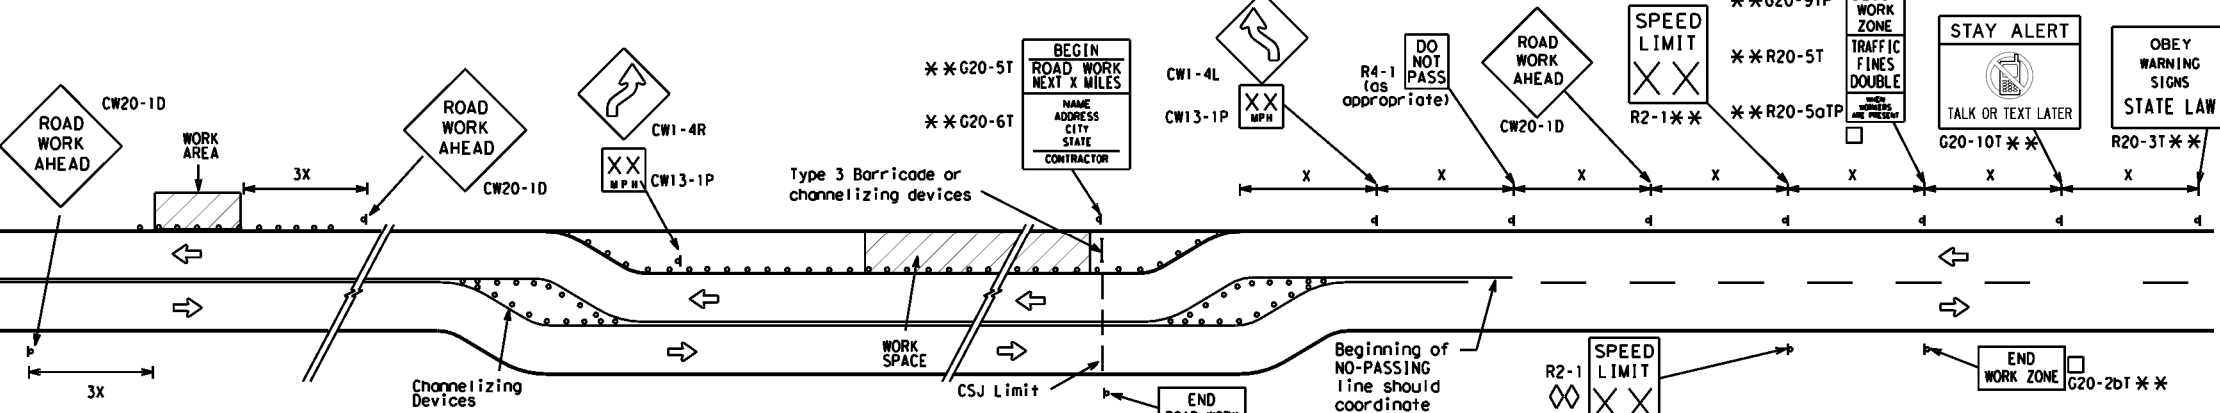


When extended distances occur between minimal work spaces, the Engineer/Inspector should ensure additional "ROAD WORK AHEAD" (CW20-1D) signs are placed in advance of these work areas to remind drivers they are still within the project limits. See the applicable TCP sheets for exact location and spacing of signs and channelizing devices.

**SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING DOWNSTREAM OF THE CSJ LIMITS**

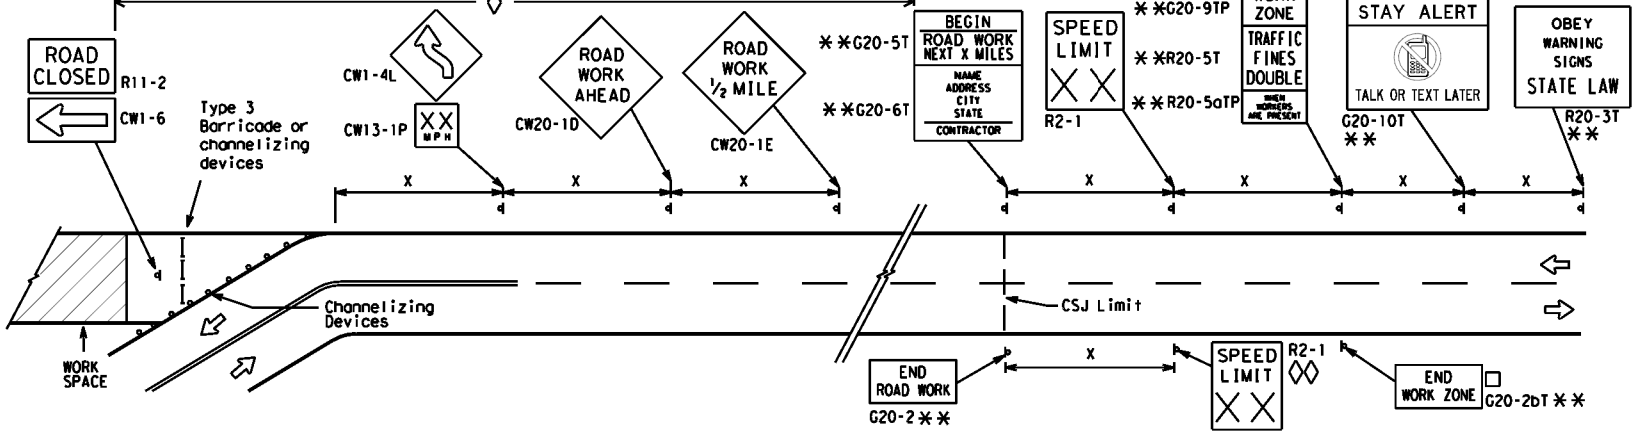

**SAMPLE LAYOUT OF SIGNING FOR WORK BEGINNING AT THE CSJ LIMITS**

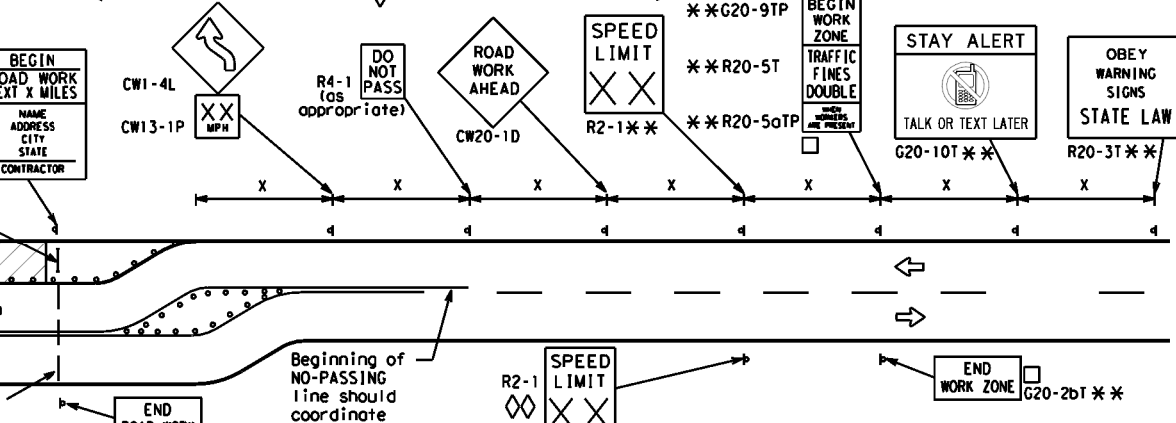

**NOTES**

- The Contractor shall determine the appropriate distance to be placed on the G20-1 series signs and "BEGIN ROAD WORK NEXT X MILES" (G20-1aT) sign for each specific project. This distance shall replace the "X" and shall be rounded to the nearest whole mile with the approval of the Engineer. No decimals shall be used.
- The "BEGIN WORK ZONE" (G20-9TP) and "END WORK ZONE" (G20-2bT) shall be used as shown on the sample layout when advance signs are required outside the CSJ Limits. They inform the motorist of entering or leaving a part of the work zone lying outside the CSJ Limits where traffic fines may double if workers are present.
  - CSJ limit signing is required for highway construction and maintenance work, with the exception of mobile operations.
  - Area for placement of "ROAD WORK AHEAD" (CW20-1D) sign and other signs or devices as called for on the Traffic Control Plan.
  - Contractor will install a regulatory speed limit sign at the end of the work zone.

**LEGEND**

—	Type 3 Barricade
○ ○ ○	Channelizing Devices
■	Sign
X	See Typical Construction Warning Sign Size and Spacing chart or the TMUTCD for sign spacing requirements.

SHEET 2 OF 12



**BARRICADE AND CONSTRUCTION PROJECT LIMIT**

**BC (2) - 21**


FILE: bc-21.dgn	DWG: TxDOT	CHK: TxDOT	APP: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT: 0156	SECT: 12	JOB: 020	HIGHWAY: SS 447
REVISIONS:	0156	12	020	SS 447
9-07 8-14	DIST: WFS	COUNTY: WICHITA	SHEET NO. 20	
7-13 5-21				



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 10/31/2023 4:30:14 PM  
 FILE: pwt://ttdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/2 - TCP/BC-21.dgn


**TYPICAL MINIMUM CLEARANCES FOR LONG TERM AND INTERMEDIATE TERM SIGNS**

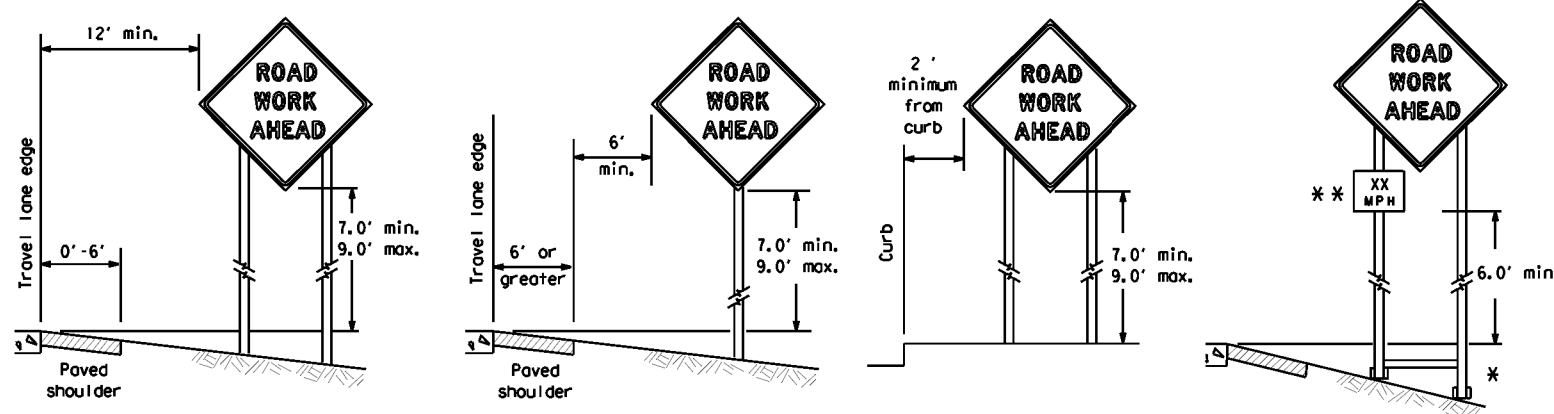

\* When placing skid supports on unlevel ground, the leg post lengths must be adjusted so the sign appears straight and plumb. Objects shall NOT be placed under skids as a means of leveling.

\*\* When plaques are placed on dual-leg supports, they should be attached to the upright nearest the travel lane. Supplemental plaques (advisory or distance) should not cover the surface of the parent sign.

**ATTACHMENT FOR SIGN SUPPORTS**

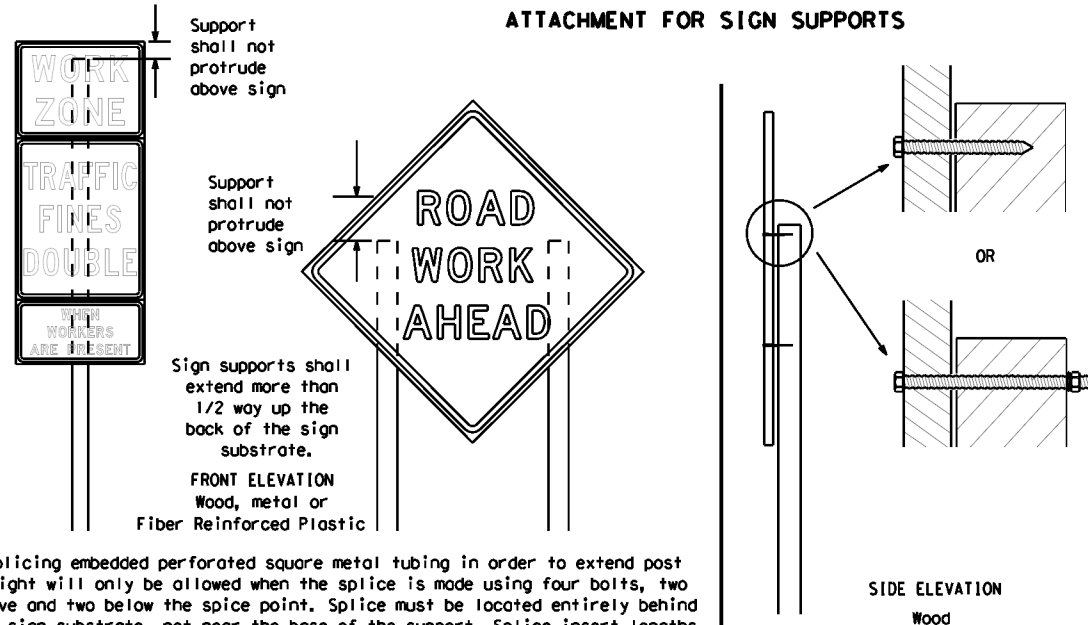


**Noils shall NOT be allowed.**  
 Each sign shall be attached directly to the sign support. Multiple signs shall not be joined or spliced by any means. Wood supports shall not be extended or repaired by splicing or other means.

Splicing embedded perforated square metal tubing in order to extend post height will only be allowed when the splice is made using four bolts, two above and two below the splice point. Splice must be located entirely behind the sign substrate, not near the base of the support. Splice insert lengths should be at least 5 times nominal post size, centered on the splice and of at least the same gauge material.

**STOP/SLOW PADDLES**

1. STOP/SLOW paddles are the primary method to control traffic by flaggers. The STOP/SLOW paddle size should be 24" x 24".
2. STOP/SLOW paddles shall be retroreflective when used at night.
3. STOP/SLOW paddles may be attached to a staff with a minimum length of 6' to the bottom of the sign.
4. Any lights incorporated into the STOP or SLOW paddle faces shall only be as specifically described in Section 6E.03 Hand Signaling Devices in the TMUTCD.

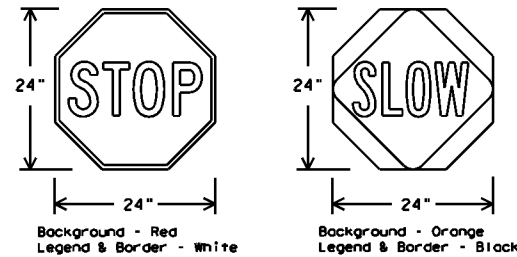

SHEETING REQUIREMENTS (WHEN USED AT NIGHT)		
USAGE	COLOR	SIGN FACE MATERIAL
BACKGROUND	RED	TYPE B OR C SHEETING
BACKGROUND	ORANGE	TYPE B <sub>FL</sub> OR C <sub>FL</sub> SHEETING
LEGEND & BORDER	WHITE	TYPE B OR C SHEETING
LEGEND & BORDER	BLACK	ACRYLIC NON-REFLECTIVE FILM

**CONTRACTOR REQUIREMENTS FOR MAINTAINING PERMANENT SIGNS WITHIN THE PROJECT LIMITS**

1. Permanent signs are used to give notice of traffic laws or regulations, call attention to conditions that are potentially hazardous to traffic operations, show route designations, destinations, directions, distances, services, points of interest, and other geographical, recreational, specific service (LOGO), or cultural information. Drivers proceeding through a work zone need the same, if not better route guidance as normally installed on a roadway without construction.
2. When permanent regulatory or warning signs conflict with work zone conditions, remove or cover the permanent signs until the permanent sign message matches the roadway condition. For details for covering large guide signs see the TS-CD standard.
3. When existing permanent signs are moved and relocated due to construction purposes, they shall be visible to motorists at all times.
4. If existing signs are to be relocated on their original supports, they shall be installed on crashworthy bases as shown on the SMD Standard sheets. The signs shall meet the required mounting heights shown on the BC Sheets or the SMD Standards. This work should be paid for under the appropriate pay item for relocating existing signs.
5. If permanent signs are to be removed and relocated using temporary supports, the Contractor shall use crashworthy supports as shown on the BC standard sheets, TLRs standard sheets or the CWZTC list. The signs shall meet the required mounting heights shown on the BC, or the SMD standard sheets during construction. This work should be paid for under the appropriate pay item for relocating existing signs.
6. Any sign or traffic control device that is struck or damaged by the Contractor or his/her construction equipment shall be replaced as soon as possible by the Contractor to ensure proper guidance for the motorists. This will be subsidiary to Item 502.

**GENERAL NOTES FOR WORK ZONE SIGNS**

1. Contractor shall install and maintain signs in a straight and plumb condition and/or as directed by the Engineer.
2. Wooden sign posts shall be painted white.
3. Barricades shall NOT be used as sign supports.
4. All signs shall be installed in accordance with the plans or as directed by the Engineer. Signs shall be used to regulate, warn, and guide the traveling public safely through the work zone.
5. The Contractor may furnish either the sign design shown in the plans or in the "Standard Highway Sign Designs for Texas" (SHSD). The Engineer/Inspector may require the Contractor to furnish other work zone signs that are shown in the TMUTCD but may have been omitted from the plans. Any variation in the plans shall be documented by written agreement between the Engineer and the Contractor's Responsible Person. All changes must be documented in writing before being implemented. This can include documenting the changes in the Inspector's TxDOT diary and having both the Inspector and Contractor initial and date the agreed upon changes.
6. The Contractor shall furnish sign supports listed in the "Compliant Work Zone Traffic Control Device List" (CWZTC) for small roadside signs. Supports for temporary large roadside signs shall meet the requirements detailed on the Temporary Large Roadside Signs (TLRS) standard sheets. The Contractor shall install the sign support in accordance with the manufacturer's recommendations. If there is a question regarding installation procedures, the Contractor shall furnish the Engineer a copy of the manufacturer's installation recommendations so the Engineer can verify the correct procedures are being followed.
7. The Contractor is responsible for installing signs on approved supports and replacing signs with damaged or cracked substrates and/or damaged or marred reflective sheeting as directed by the Engineer/Inspector.
8. Identification markings may be shown only on the back of the sign substrate. The maximum height of letters and/or company logos used for identification shall be 1 inch.
9. The Contractor shall replace damaged wood posts. New or damaged wood sign posts shall not be spliced.

**DURATION OF WORK (as defined by the "Texas Manual on Uniform Traffic Control Devices" Part 6)**

1. The types of sign supports, sign mounting height, the size of signs, and the type of sign substrates can vary based on the type of work being performed. The Engineer is responsible for selecting the appropriate size sign for the type of work being performed. The Contractor is responsible for ensuring the sign support, sign mounting height and substrate meets manufacturer's recommendations in regard to crashworthiness and duration of work requirements.
  - a. Long-term stationary - work that occupies a location more than 3 days.
  - b. Intermediate-term stationary - work that occupies a location more than one daylight period up to 3 days, or nighttime work lasting more than one hour.
  - c. Short-term stationary - daytime work that occupies a location for more than 1 hour in a single daylight period.
  - d. Short, duration - work that occupies a location up to 1 hour.
  - e. Mobile - work that moves continuously or intermittently (stopping for up to approximately 15 minutes.)

**SIGN MOUNTING HEIGHT**

1. The bottom of Long-term/Intermediate-term signs shall be at least 7 feet, but not more than 9 feet, above the paved surface, except as shown for supplemental plaques mounted below other signs.
2. The bottom of Short-term/Short Duration signs shall be a minimum of 1 foot above the pavement surface but no more than 2 feet above the ground.
3. Long-term/Intermediate-term Signs may be used in lieu of Short-term/Short Duration signing.
4. Short-term/Short Duration signs shall be used only during daylight and shall be removed at the end of the workday or raised to appropriate Long-term/Intermediate sign height.
5. Regulatory signs shall be mounted at least 7 feet, but not more than 9 feet, above the paved surface regardless of work duration.

**SIZE OF SIGNS**

1. The Contractor shall furnish the sign sizes shown on BC (2) unless otherwise shown in the plans or as directed by the Engineer.

**SIGN SUBSTRATES**

1. The Contractor shall ensure the sign substrate is installed in accordance with the manufacturer's recommendations for the type of sign support that is being used. The CWZTC lists each substrate that can be used on the different types and models of sign supports.
2. "Mesh" type materials are NOT an approved sign substrate, regardless of the tightness of the weave.
3. All wooden individual sign panels fabricated from 2 or more pieces shall have one or more plywood cleat, 1/2" thick by 6" wide, fastened to the back of the sign and extending fully across the sign. The cleat shall be attached to the back of the sign using wood screws that do not penetrate the face of the sign panel. The screws shall be placed on both sides of the splice and spaced at 6" centers. The Engineer may approve other methods of splicing the sign face.

**REFLECTIVE SHEETING**

1. All signs shall be retroreflective and constructed of sheeting meeting the color and retro-reflectivity requirements of DMS-8300 for rigid signs or DMS-8310 for roll-up signs. The web address for DMS specifications is shown on BC(1).
2. White sheeting, meeting the requirements of DMS-8300 Type A, shall be used for signs with a white background.
3. Orange sheeting, meeting the requirements of DMS-8300 Type B<sub>FL</sub> or Type C<sub>FL</sub>, shall be used for rigid signs with orange backgrounds.

**SIGN LETTERS**

1. All sign letters and numbers shall be clear, and open rounded type uppercase alphabet letters as approved by the Federal Highway Administration (FHWA) and as published in the "Standard Highway Sign Design for Texas" manual. Signs, letters and numbers shall be of first class workmanship in accordance with Department Standards and Specifications.

**REMOVING OR COVERING**

1. When sign messages may be confusing or do not apply, the signs shall be removed or completely covered.
2. Long-term stationary or intermediate stationary signs installed on square metal tubing may be turned away from traffic 90 degrees when the sign message is not applicable. This technique may not be used for signs installed in the median of divided highways or near any intersections where the sign may be seen from approaching traffic.
3. Signs installed on wooden skids shall not be turned at 90 degree angles to the roadway. These signs should be removed or completely covered when not required.
4. When signs are covered, the material used shall be opaque, such as heavy mil black plastic, or other materials which will cover the entire sign face and maintain their opaque properties under automobile headlights at night, without damaging the sign sheeting.
5. Burlap shall NOT be used to cover signs.
6. Duct tape or other adhesive material shall NOT be affixed to a sign face.
7. Signs and anchor stubs shall be removed and holes backfilled upon completion of work.

**SIGN SUPPORT WEIGHTS**

1. Where sign supports require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand should be used.
2. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight.
3. Rock, concrete, iron, steel or other solid objects shall not be permitted for use as sign support weights.
4. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs.
5. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall NOT be used.
6. Rubber ballasts designed for channelizing devices should not be used for ballast on portable sign supports. Sign supports designed and manufactured with rubber bases may be used when shown on the CWZTC list.
7. Sandbags shall only be placed along or laid over the base supports of the traffic control device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners. Sandbags shall be placed along the length of the skids to weigh down the sign support.
8. Sandbags shall NOT be placed under the skid and shall not be used to level sign supports placed on slopes.

**FLAGS ON SIGNS**

1. Flags may be used to draw attention to warning signs. When used, the flag shall be 16 inches square or larger and shall be orange or fluorescent red-orange in color. Flags shall not be allowed to cover any portion of the sign face.

SHEET 4 OF 12





**BARRICADE AND CONSTRUCTION TEMPORARY SIGN NOTES**

BC (4) - 21


FILE: bc-21.dgn	DWG: TxDOT	CR: TxDOT	REV: TxDOT	CHK: TxDOT
© TxDOT November 2002	CONT: 0156	SECT: 12	JOB: 020	HIGHWAY: SS 447
9-07 8-14	DIST: WFS	COUNTY: WICHITA	SHEET NO.: 22	
7-13 5-21				

DATE: 10/31/2023 4:30:19 PM  
 FILE: p:\w\txdot.projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\2 - CP\BC-21.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other units or for incorrect results or damages resulting from its use.

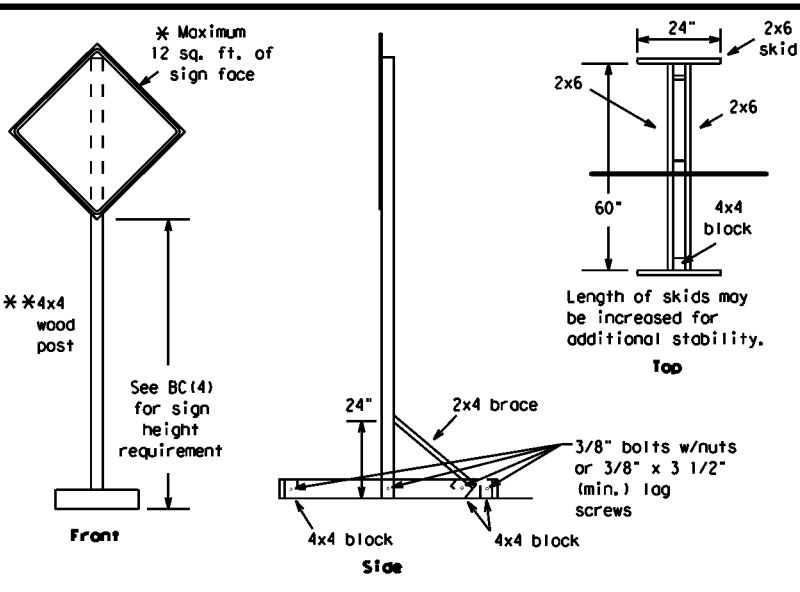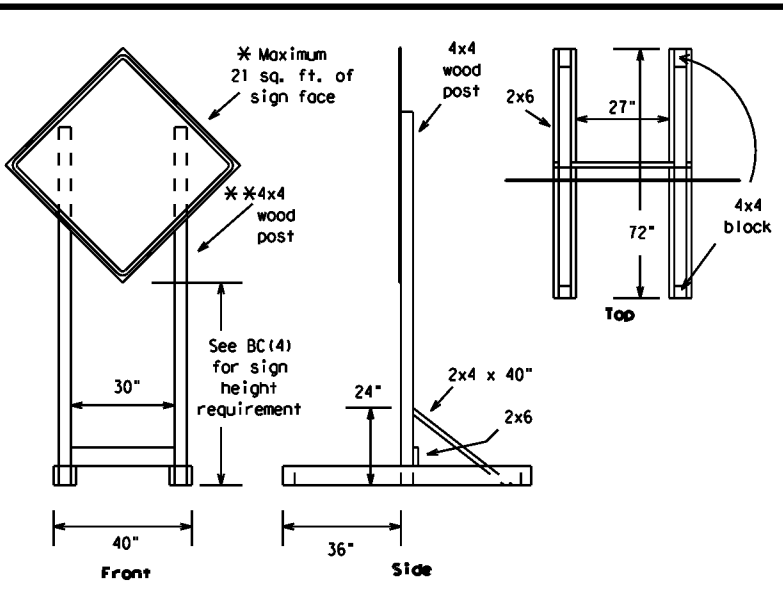



**SKID MOUNTED WOOD SIGN SUPPORTS**

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

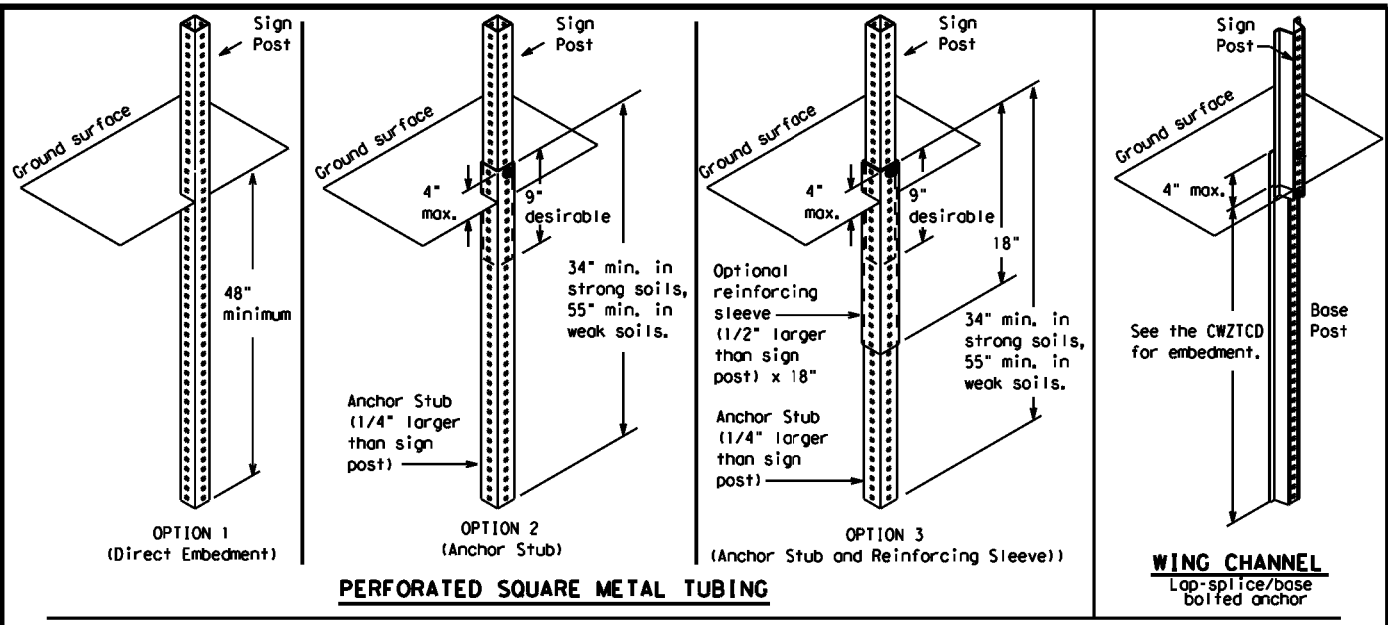

**GROUND MOUNTED SIGN SUPPORTS**

Refer to the CWZTCD and the manufacturer's installation procedure for each type sign support. The maximum sign square footage shall adhere to the manufacturer's recommendation. Two post installations can be used for larger signs.

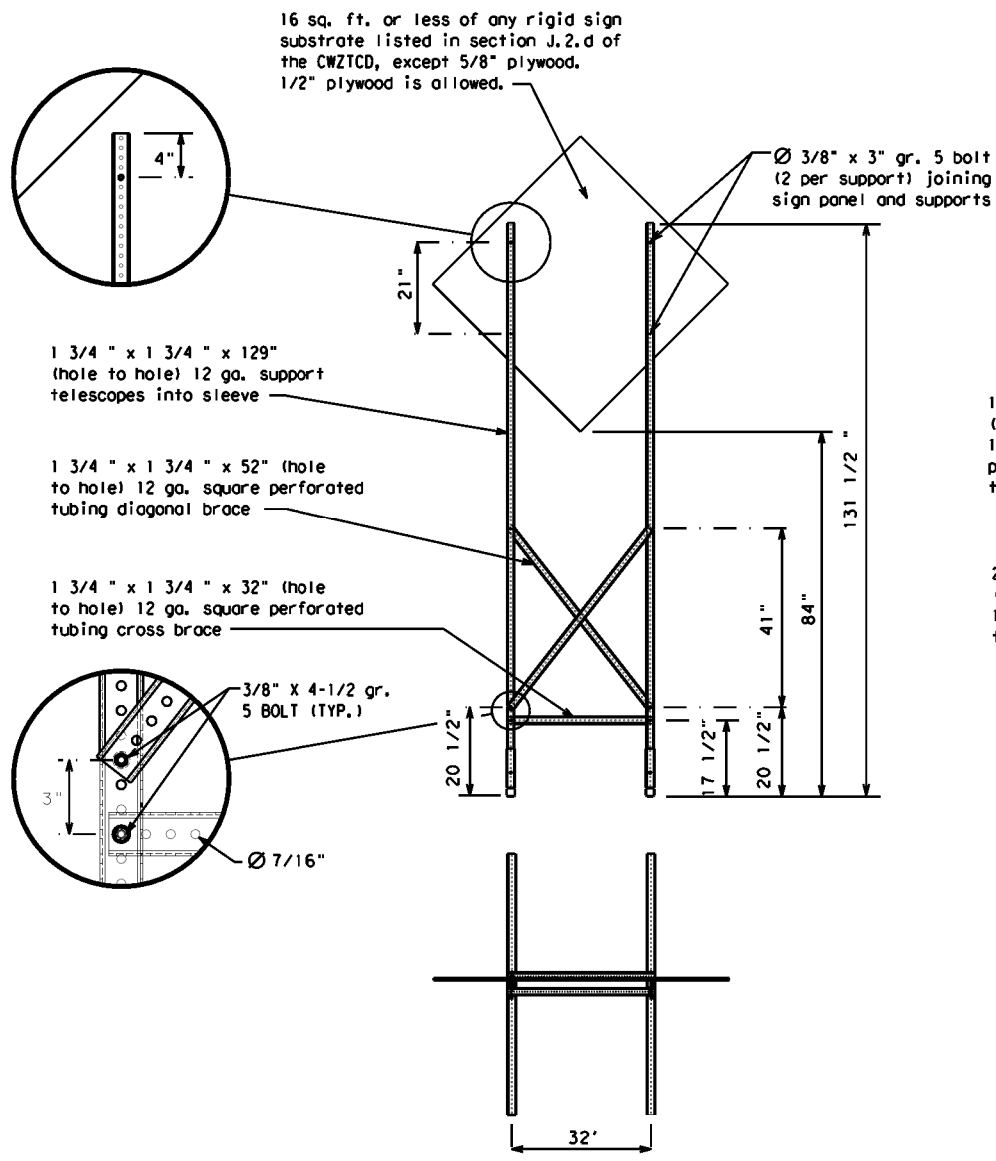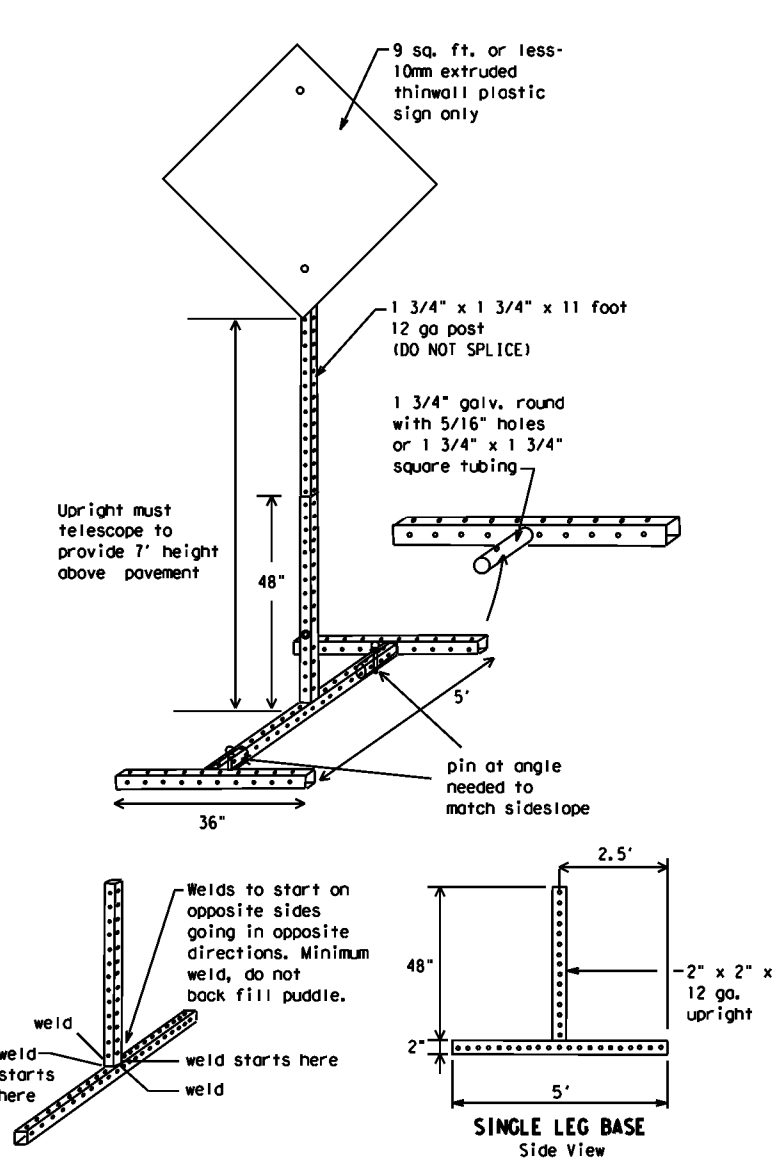

**SKID MOUNTED PERFORATED SQUARE STEEL TUBING SIGN SUPPORTS**

\* LONG/INTERMEDIATE TERM STATIONARY - PORTABLE SKID MOUNTED SIGN SUPPORTS

**WEDGE ANCHORS**

Both steel and plastic Wedge Anchor Systems as shown on the SMD Standard Sheets may be used as temporary sign supports for signs up to 10 square feet of sign face. They may be set in concrete or in sturdy soils if approved by the Engineer. (See web address for "Traffic Engineering Standard Sheets" on BC(1)).

**OTHER DESIGNS**

MORE DETAILS OF APPROVED LONG/INTERMEDIATE AND SHORT TERM SUPPORTS CAN BE FOUND ON THE CWZTCD LIST. SEE BC(1) FOR WEBSITE LOCATION.

**GENERAL NOTES**

- Nails may be used in the assembly of wooden sign supports, but 3/8" bolts with nuts or 3/8" x 3 1/2" lag screws must be used on every joint for final connection.
- No more than 2 sign posts shall be placed within a 7 ft. circle, except for specific materials noted on the CWZTCD List.
- When project is completed, all sign supports and foundations shall be removed from the project site. This will be considered subsidiary to Item 502.

- \* See BC(4) for definition of "Work Duration."
- \*\* Wood sign posts MUST be one piece. Splicing will NOT be allowed. Posts shall be painted white.
- ☐ See the CWZTCD for the type of sign substrate that can be used for each approved sign support.

SHEET 5 OF 12



**BARRICADE AND CONSTRUCTION TYPICAL SIGN SUPPORT**

**BC(5) - 21**

FILE: bc-21.dgn	DWF: TxDOT	CR: TxDOT	DWG: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT	SECT	JOB	HIGHWAY
REVISIONS	015612	020	SS 447	
9-07 8-14	DIST	COUNTY	SHEET NO.	
7-13 5-21	WFS	WICHITA	23	

WHEN NOT IN USE, REMOVE THE PCMS FROM THE RIGHT-OF-WAY OR PLACE THE PCMS BEHIND BARRIER OR GUARDRAIL WITH SIGN PANEL TURNED PARALLEL TO TRAFFIC

# RECOMMENDED PHASES AND FORMATS FOR PCMS MESSAGES DURING ROADWORK ACTIVITIES

(The Engineer may approve other messages not specifically covered here.)

## PORTABLE CHANGEABLE MESSAGE SIGNS

- The Engineer/Inspector shall approve all messages used on portable changeable message signs (PCMS).
- Messages on PCMS should contain no more than 8 words (about four to eight characters per word), not including simple words such as "TO," "FOR," "AT," etc.
- Messages should consist of a single phase, or two phases that alternate. Three-phase messages are not allowed. Each phase of the message should convey a single thought, and must be understood by itself.
- Use the word "EXIT" to refer to an exit ramp on a freeway; i.e., "EXIT CLOSED." Do not use the term "RAMP."
- Always use the route or interstate designation (IH, US, SH, FM) along with the number when referring to a roadway.
- When in use, the bottom of a stationary PCMS message panel should be a minimum 7 feet above the roadway, where possible.
- The message term "WEEKEND" should be used only if the work is to start on Saturday morning and end by Sunday evening at midnight. Actual days and hours of work should be displayed on the PCMS if work is to begin on Friday evening and/or continue into Monday morning.
- The Engineer/Inspector may select one of two options which are available for displaying a two-phase message on a PCMS. Each phase may be displayed for either four seconds each or for three seconds each.
- Do not "flash" messages or words included in a message. The message should be steady burn or continuous while displayed.
- Do not present redundant information on a two-phase message; i.e., keeping two lines of the message the same and changing the third line.
- Do not use the word "Danger" in message.
- Do not display the message "LANES SHIFT LEFT" or "LANES SHIFT RIGHT" on a PCMS. Drivers do not understand the message.
- Do not display messages that scroll horizontally or vertically across the face of the sign.
- The following table lists abbreviated words and two-word phrases that are acceptable for use on a PCMS. Both words in a phrase must be displayed together. Words or phrases not on this list should not be abbreviated, unless shown in the TMUTCD.
- PCMS character height should be at least 18 inches for trailer mounted units. They should be visible from at least 1/2 (.5) mile and the text should be legible from at least 600 feet at night and 800 feet in daylight. Truck mounted units must have a character height of 10 inches and must be legible from at least 400 feet.
- Each line of text should be centered on the message board rather than left or right justified.
- If disabled, the PCMS should default to an illegible display that will not alarm motorists and will only be used to alert workers that the PCMS has malfunctioned. A pattern such as a series of horizontal solid bars is appropriate.

## Phase 1: Condition Lists

### Road/Lane/Ramp Closure List

FREEWAY CLOSED X MILE
ROAD CLOSED AT SH XXX
ROAD CLSD AT FM XXXX
RIGHT X LANES CLOSED
CENTER LANE CLOSED
NIGHT LANE CLOSURES
VARIOUS LANES CLOSED
EXIT CLOSED
MALL DRIVEWAY CLOSED
XXXXXXXX BLVD CLOSED

### Other Condition List

FRONTAGE ROAD CLOSED
SHOULDER CLOSED XXX FT
RIGHT LN CLOSED XXX FT
RIGHT X LANES OPEN
DAYTIME LANE CLOSURES
I-XX SOUTH EXIT CLOSED
EXIT XXX CLOSED X MILE
RIGHT LN TO BE CLOSED
X LANES CLOSED TUE - FRI

\* LANES SHIFT in Phase 1 must be used with STAY IN LANE in Phase 2.

## Phase 2: Possible Component Lists

### Action to Take/Effect on Travel List

MERGE RIGHT
DETOUR NEXT X EXITS
USE EXIT XXX
STAY ON US XXX SOUTH
TRUCKS USE US XXX N
WATCH FOR TRUCKS
EXPECT DELAYS
REDUCE SPEED XXX FT
USE OTHER ROUTES
STAY IN LANE

### Location List

AT FM XXXX
BEFORE RAILROAD CROSSING
NEXT X MILES
PAST US XXX EXIT
XXXXXXXX TO XXXXXXX
US XXX TO FM XXXX

### Warning List

SPEED LIMIT XX MPH
MAXIMUM SPEED XX MPH
MINIMUM SPEED XX MPH
ADVISORY SPEED XX MPH
RIGHT LANE EXIT
USE CAUTION
DRIVE SAFELY
DRIVE WITH CARE

### \*\* Advance Notice List

TUE-FRI XX AM - X PM
APR XX - XX X PM - X AM
BEGINS MONDAY
BEGINS MAY XX
MAY X - X XX PM - XX AM
NEXT FRI - SUN
XX AM TO XX PM
NEXT TUE AUG XX
TONIGHT XX PM - XX AM

\*\* See Application Guidelines Note 6.

## APPLICATION GUIDELINES

- Only 1 or 2 phases are to be used on a PCMS.
- The 1st phase (or both) should be selected from the "Road/Lane/Ramp Closure List" and the "Other Condition List".
- A 2nd phase can be selected from the "Action to Take/Effect on Travel, Location, General Warning, or Advance Notice Phase Lists".
- A Location Phase is necessary only if a distance or location is not included in the first phase selected.
- If two PCMS are used in sequence, they must be separated by a minimum of 1000 ft. Each PCMS shall be limited to two phases, and should be understandable by themselves.
- For advance notice, when the current date is within seven days of the actual work date, calendar days should be replaced with days of the week. Advance notification should typically be for no more than one week prior to the work.

## WORDING ALTERNATIVES

- The words RIGHT, LEFT and ALL can be interchanged as appropriate.
- Roadway designations IH, US, SH, FM and LP can be interchanged as appropriate.
- EAST, WEST, NORTH and SOUTH (or abbreviations E, W, N and S) can be interchanged as appropriate.
- Highway names and numbers replaced as appropriate.
- ROAD, HIGHWAY and FREEWAY can be interchanged as needed.
- AHEAD may be used instead of distances if necessary.
- FT and MI, MILE and MILES interchanged as appropriate.
- AT, BEFORE and PAST interchanged as needed.
- Distances or AHEAD can be eliminated from the message if a location phase is used.

PCMS SIGNS WITHIN THE R.O.W. SHALL BE BEHIND GUARDRAIL OR CONCRETE BARRIER OR SHALL HAVE A MINIMUM OF FOUR (4) PLASTIC DRUMS PLACED PERPENDICULAR TO TRAFFIC ON THE UPSTREAM SIDE OF THE PCMS, WHEN EXPOSED TO ONE DIRECTION OF TRAFFIC. WHEN EXPOSED TO TWO WAY TRAFFIC, THE FOUR DRUMS SHOULD BE PLACED WITH ONE DRUM AT EACH OF THE FOUR CORNERS OF THE UNIT.

## FULL MATRIX PCMS SIGNS

- When Full Matrix PCMS signs are used, the character height and legibility/visibility requirements shall be maintained as listed in Note 15 under "PORTABLE CHANGEABLE MESSAGE SIGNS" above.
- When symbol signs, such as the "Flagger Symbol" (CW20-7) are represented graphically on the Full Matrix PCMS sign and, with the approval of the Engineer, it shall maintain the legibility/visibility requirement listed above.
- When symbol signs are represented graphically on the Full Matrix PCMS, they shall only supplement the use of the static sign represented, and shall not substitute for, or replace that sign.
- A full matrix PCMS may be used to simulate a flashing arrow board provided it meets the visibility, flash rate and dimming requirements on BC(7), for the same size arrow.

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

WORD OR PHRASE	ABBREVIATION	WORD OR PHRASE	ABBREVIATION
Access Road	ACCS RD	Major	MAJ
Alternate	ALT	Miles	MI
Avenue	AVE	Miles Per Hour	MPH
Best Route	BEST RTE	Minor	MNR
Boulevard	BLVD	Monday	MON
Bridge	BRDG	Normal	NORM
Cannot	CANT	North	N
Center	CTR	Northbound	(route) N
Construction Ahead	CONST AHD	Parking	PKING
CROSSING	XING	Road	RD
Detour Route	DETOUR RTE	Right Lane	RT LN
Do Not	DONT	Saturday	SAT
East	E	Service Road	SERV RD
Eastbound	(route) E	Shoulder	SHLDR
Emergency	EMER	Slippery	SLIP
Emergency Vehicle	EMER VEH	South	S
Entrance, Enter	ENT	Southbound	(route) S
Express Lane	EXP LN	Speed	SPD
Expressway	EXPWY	Street	ST
XXXX Feet	XXXX FT	Sunday	SUN
Fog Ahead	FOG AHD	Telephone	PHONE
Freeway	FRWY, FWY	Temporary	TEMP
Freeway Blocked	FWY BLKD	Thursday	THURS
Friday	FRI	To Downtown	TO DWNTN
Hazardous Driving	HAZ DRIVING	Traffic	TRAF
Hazardous Material	HAZMAT	Travelers	TRVLR
High Occupancy	HOV	Tuesday	TUES
Vehicle	HWY	Time Minutes	TIME MIN
Highway	HWY	Upper Level	UPR LEVEL
Hour(s)	HR, HRS	Vehicles (s)	VEH, VEHS
Information	INFO	Warning	WARN
It Is	ITS	Wednesday	WED
Junction	JCT	Weight Limit	WT LIMIT
Left	LFT	West	W
Left Lane	LFT LN	Westbound	(route) W
Lane Closed	LN CLOSED	Wet Pavement	WET PVMT
Lower Level	LWR LEVEL	Will Not	WONT
Maintenance	MAINT		

Roadway designation = IH-number, US-number, SH-number, FM-number



## BARRICADE AND CONSTRUCTION PORTABLE CHANGEABLE MESSAGE SIGN (PCMS)


BC (6) - 21

FILE: bc-21.dgn	DWG: TxDOT	CHK: TxDOT	DRW: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT: 0156	SECT: 12	JOB: 020	HIGHWAY: SS 447
REVISIONS	0156	12	020	SS 447
9-07 8-14	DIST: WFS	COUNTY: WICHITA	SHEET NO.: 24	
7-13 5-21				




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.  
 DATE: 10/31/2023 4:30:29 PM  
 FILE: pwt://ttdot.projectwiseonline.com:15612020/4 - WFS/Design Projects/015612020/4 - Design/Plan Set/2 - TCP/BC-21.dgn

- Barrier Reflectors shall be pre-qualified, and conform to the color and reflectivity requirements of DMS-8600. A list of prequalified Barrier Reflectors can be found at the Material Producer List web address shown on BC(1).
- Color of Barrier Reflectors shall be as specified in the TMUTCD. The cost of the reflectors shall be considered subsidiary to Item 512.

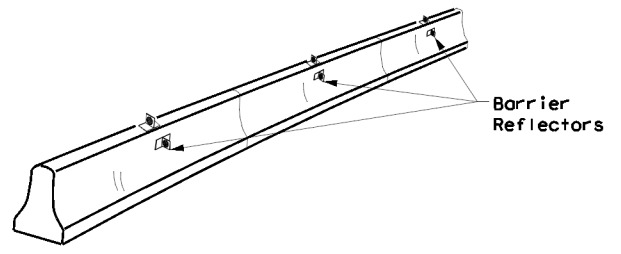


**CONCRETE TRAFFIC BARRIER (CTB)**

- Where traffic is on one side of the CTB, two (2) Barrier Reflectors shall be mounted in approximately the midsection of each section of CTB. An alternate mounting location is uniformly spaced at one end of each CTB. This will allow for attachment of a barrier grapple without damaging the reflector. The Barrier Reflector mounted on the side of the CTB shall be located directly below the reflector mounted on top of the barrier, as shown in the detail above.
- Where CTB separates two-way traffic, three barrier reflectors shall be mounted on each section of CTB. The reflector unit on top shall have two yellow reflective faces (Bi-Directional) while the reflectors on each side of the barrier shall have one yellow reflective face, as shown in the detail above.
- When CTB separates traffic traveling in the same direction, no barrier reflectors will be required on top of the CTB.
- Barrier Reflector units shall be yellow or white in color to match the edgeline being supplemented.
- Maximum spacing of Barrier Reflectors is forty (40) feet.
- Pavement markers or temporary flexible-reflective roadway marker tabs shall NOT be used as CTB delineation.
- Attachment of Barrier Reflectors to CTB shall be per manufacturer's recommendations.
- Missing or damaged Barrier Reflectors shall be replaced as directed by the Engineer.
- Single slope barriers shall be delineated as shown on the above detail.

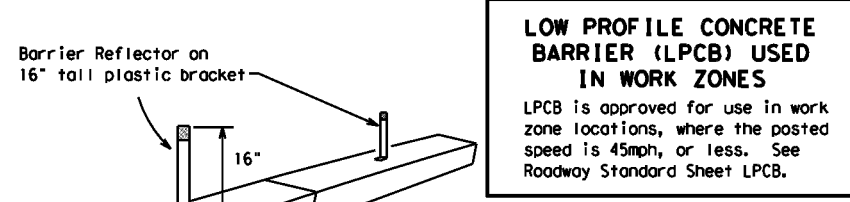

Max. spacing of barrier reflectors is 20 feet. Attach the delineators as per manufacturer's recommendations.

**LOW PROFILE CONCRETE BARRIER (LPCB)**

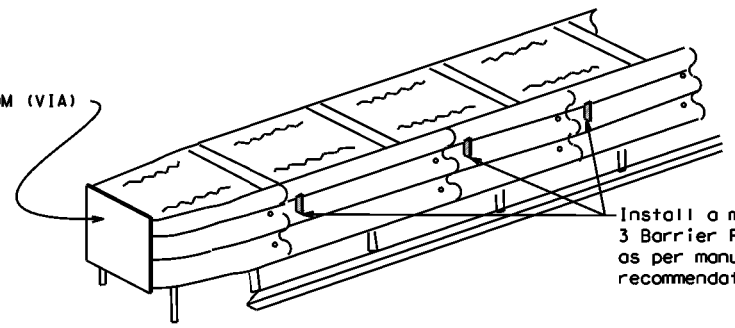

**DELINEATION OF END TREATMENTS**

**END TREATMENTS FOR CTB'S USED IN WORK ZONES**

End treatments used on CTB's in work zones shall meet the appropriate crashworthy standards as defined in the Manual for Assessing Safety Hardware (MASH). Refer to the CWZTCD List for approved end treatments and manufacturers.

**BARRIER REFLECTORS FOR CONCRETE TRAFFIC BARRIER AND ATTENUATORS**

**WARNING LIGHTS**



- Warning lights shall meet the requirements of the TMUTCD.
- Warning lights shall NOT be installed on barricades.
- Type A-Low Intensity Flashing Warning Lights are commonly used with drums. They are intended to warn of or mark a potentially hazardous area. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "FL". The Type A Warning Lights shall not be used with signs manufactured with Type B<sub>PL</sub> or C<sub>FL</sub> Sheeting meeting the requirements of Departmental Material Specification DMS-8300.
- Type-C and Type D 360 degree Steady Burn Lights are intended to be used in a series for delineation to supplement other traffic control devices. Their use shall be as indicated on this sheet and/or other sheets of the plans by the designation "SB".
- The Engineer/Inspector or the plans shall specify the location and type of warning lights to be installed on the traffic control devices.
- When required by the Engineer, the Contractor shall furnish a copy of the warning lights certification. The warning light manufacturer will certify the warning lights meet the requirements of the latest ITE Purchase Specifications for Flashing and Steady-Burn Warning Lights.
- When used to delineate curves, Type-C and Type D Steady Burn Lights should only be placed on the outside of the curve, not the inside.
- The location of warning lights and warning reflectors on drums shall be as shown elsewhere in the plans.

**WARNING LIGHTS MOUNTED ON PLASTIC DRUMS**

- Type A flashing warning lights are intended to warn drivers that they are approaching or are in a potentially hazardous area.
- Type A random flashing warning lights are not intended for delineation and shall not be used in a series.
- A series of sequential flashing warning lights placed on channelizing devices to form a merging taper may be used for delineation. If used, the successive flashing of the sequential warning lights should occur from the beginning of the taper to the end of the merging taper in order to identify the desired vehicle path. The rate of flashing for each light shall be 65 flashes per minute, plus or minus 10 flashes.
- Type C and D steady-burn warning lights are intended to be used in a series to delineate the edge of the travel lane on detours, on lane changes, on lane closures, and on other similar conditions.
- Type A, Type C and Type D warning lights shall be installed at locations as detailed on other sheets in the plans.
- Warning lights shall not be installed on a drum that has a sign, chevron or vertical panel.
- The maximum spacing for warning lights on drums should be identical to the channelizing device spacing.


**WARNING REFLECTORS MOUNTED ON PLASTIC DRUMS AS A SUBSTITUTE FOR TYPE C (STEADY BURN) WARNING LIGHTS**

- A warning reflector or approved substitute may be mounted on a plastic drum as a substitute for a Type C, steady burn warning light at the discretion of the Contractor unless otherwise noted in the plans.
- The warning reflector shall be yellow in color and shall be manufactured using a sign substrate approved for use with plastic drums listed on the CWZTCD.
- The warning reflector shall have a minimum retroreflective surface area (one-side) of 30 square inches.
- Round reflectors shall be fully reflectorized, including the area where attached to the drum.
- Square substrates must have a minimum of 30 square inches of reflectorized sheeting. They do not have to be reflectorized where it attaches to the drum.
- The side of the warning reflector facing approaching traffic shall have sheeting meeting the color and retroreflectivity requirements for DMS 8300-Type B or Type C.
- When used near two-way traffic, both sides of the warning reflector shall be reflectorized.
- The warning reflector should be mounted on the side of the handle nearest approaching traffic.
- The maximum spacing for warning reflectors should be identical to the channelizing device spacing requirements.



Arrow Boards may be located behind channelizing devices in place for a shoulder taper or merging taper, otherwise they shall be delineated with four (4) channelizing devices placed perpendicular to traffic on the upstream side of traffic.

- The Flashing Arrow Board should be used for all lane closures on multi-lane roadways, or slow moving maintenance or construction activities on the travel lanes.
- Flashing Arrow Boards should not be used on two-lane, two-way roadways, detours, diversions or work on shoulders unless the "CAUTION" display (see detail below) is used.
- The Engineer/Inspector shall choose all appropriate signs, barricades and/or other traffic control devices that should be used in conjunction with the Flashing Arrow Board.
- The Flashing Arrow Board should be able to display the following symbols:

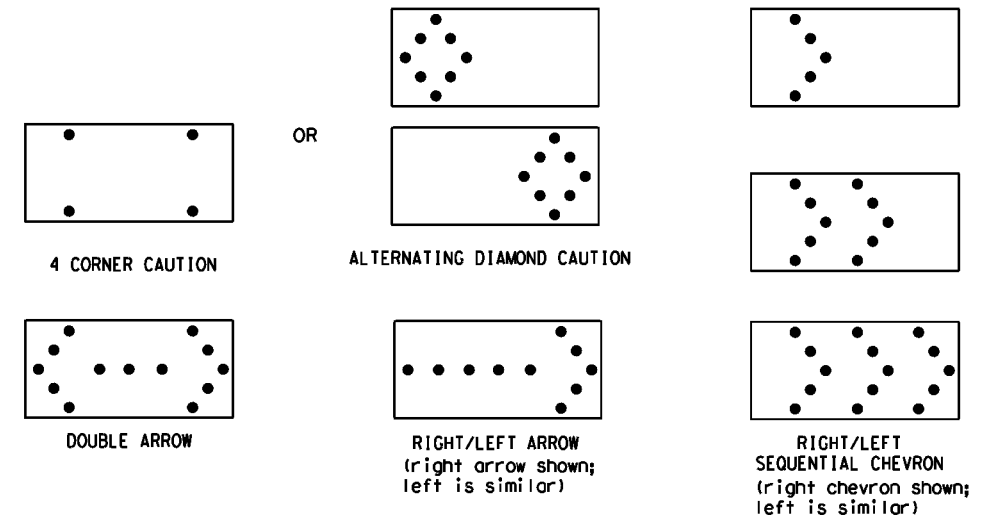

- The "CAUTION" display consists of four corner lamps flashing simultaneously, or the Alternating Diamond Caution mode as shown.
- The straight line caution display is NOT ALLOWED.
- The Flashing Arrow Board shall be capable of minimum 50 percent dimming from rated lamp voltage. The flashing rate of the lamps shall not be less than 25 nor more than 40 flashes per minute.
- Minimum lamp "on time" shall be approximately 50 percent for the flashing arrow and equal intervals of 25 percent for each sequential phase of the flashing chevron.
- The sequential arrow display is NOT ALLOWED.
- The flashing arrow display is the TxDOT standard; however, the sequential chevron display may be used during daylight operations.
- The Flashing Arrow Board shall be mounted on a vehicle, trailer or other suitable support.
- A Flashing Arrow Board SHALL NOT BE USED to laterally shift traffic.
- A full matrix PCMS may be used to simulate a Flashing Arrow Board provided it meets visibility, flash rate and dimming requirements on this sheet for the same size arrow.
- Minimum mounting height of trailer mounted Arrow Boards should be 7 feet from roadway to bottom of panel.

REQUIREMENTS			
TYPE	MINIMUM SIZE	MINIMUM NUMBER OF PANEL LAMPS	MINIMUM VISIBILITY DISTANCE
B	30 x 60	13	3/4 mile
C	48 x 96	15	1 mile

**ATTENTION**

Flashing Arrow Boards shall be equipped with automatic dimming devices.

WHEN NOT IN USE, REMOVE THE ARROW BOARD FROM THE RIGHT-OF-WAY OR PLACE THE ARROW BOARD BEHIND CONCRETE TRAFFIC BARRIER OR GUARDRAIL.

**FLASHING ARROW BOARDS**

SHEET 7 OF 12

**TRUCK-MOUNTED ATTENUATORS**

- Truck-mounted attenuators (TMA) used on TxDOT facilities must meet the requirements outlined in the Manual for Assessing Safety Hardware (MASH).
- Refer to the CWZTCD for the requirements of Level 2 or Level 3 TMAs.
- Refer to the CWZTCD for a list of approved TMAs.
- TMAs are required on freeways unless otherwise noted in the plans.
- A TMA should be used anytime that it can be positioned 30 to 100 feet in advance of the area of crew exposure without adversely affecting the work performance.
- The only reason a TMA should not be required is when a work area is spread down the roadway and the work crew is an extended distance from the TMA.



**BARRICADE AND CONSTRUCTION ARROW PANEL, REFLECTORS, WARNING LIGHTS & ATTENUATOR**

**BC (7) - 21**

FILE: bc-21.dgn	DWG: TxDOT	CR: TxDOT	DWG: TxDOT	CR: TxDOT
© TxDOT November 2002		CONT: 015612	SECT: 020	HIGHWAY: SS 447
REVISIONS		DATE: 9-07 8-14	DIST: WFS	COUNTY: WICHITA
		DATE: 7-13 5-21		SHEET NO.: 25

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.  
 DATE: 10/31/2023 4:30:34 PM  
 FILE: pwt://txdot.projectwiseonline.com: WFS/Design Projects/015612020/4 - Design/Plan Set/2 - TCP/BC-21.dgn

**GENERAL NOTES**

- For long term stationary work zones on freeways, drums shall be used as the primary channelizing device.
- For intermediate term stationary work zones on freeways, drums should be used as the primary channelizing device but may be replaced in tangent sections by vertical panels, or 42" two-piece cones. In tangent sections, one-piece cones may be used with the approval of the Engineer but only if personnel are present on the project at all times to maintain the cones in proper position and location.
- For short term stationary work zones on freeways, drums are the preferred channelizing device but may be replaced in tapers, transitions and tangent sections by vertical panels, two-piece cones or one-piece cones as approved by the Engineer.
- Drums and all related items shall comply with the requirements of the current version of the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
- Drums, bases, and related materials shall exhibit good workmanship and shall be free from objectionable marks or defects that would adversely affect their appearance or serviceability.
- The Contractor shall have a maximum of 24 hours to replace any plastic drums identified for replacement by the Engineer/Inspector. The replacement device must be an approved device.

**GENERAL DESIGN REQUIREMENTS**



- Pre-qualified plastic drums shall meet the following requirements:
- Plastic drums shall be a two-piece design; the "body" of the drum shall be the top portion and the "base" shall be the bottom.
  - The body and base shall lock together in such a manner that the body separates from the base when impacted by a vehicle traveling at a speed of 20 MPH or greater but prevents accidental separation due to normal handling and/or air turbulence created by passing vehicles.
  - Plastic drums shall be constructed of lightweight flexible, and deformable materials. The Contractor shall NOT use metal drums or single piece plastic drums as channelization devices or sign supports.
  - Drums shall present a profile that is a minimum of 18 inches in width at the 36 inch height when viewed from any direction. The height of drum unit (body installed on base) shall be a minimum of 36 inches and a maximum of 42 inches.
  - The top of the drum shall have a built-in handle for easy pickup and shall be designed to drain water and not collect debris. The handle shall have a minimum of two widely spaced 9/16 inch diameter holes to allow attachment of a warning light, warning reflector unit or approved compliant sign.
  - The exterior of the drum body shall have a minimum of four alternating orange and white retroreflective circumferential stripes not less than 4 inches nor greater than 8 inches in width. Any non-reflectORIZED space between any two adjacent stripes shall not exceed 2 inches in width.
  - Bases shall have a maximum width of 36 inches, a maximum height of 4 inches, and a minimum of two footholds of sufficient size to allow base to be held down while separating the drum body from the base.
  - Plastic drums shall be constructed of ultra-violet stabilized, orange, high-density polyethylene (HDPE) or other approved material.
  - Drum body shall have a maximum unballasted weight of 11 lbs.
  - Drum and base shall be marked with manufacturer's name and model number.

**RETROREFLECTIVE SHEETING**

- The stripes used on drums shall be constructed of sheeting meeting the color and retroreflectivity requirements of Departmental Materials Specification DMS-8300, "Sign Face Materials." Type A or Type B reflective sheeting shall be supplied unless otherwise specified in the plans.
- The sheeting shall be suitable for use on and shall adhere to the drum surface such that, upon vehicular impact, the sheeting shall remain adhered in-place and exhibit no delaminating, cracking, or loss of retroreflectivity other than that loss due to abrasion of the sheeting surface.


**BALLAST**

- Unballasted bases shall be large enough to hold up to 50 lbs. of sand. This base, when filled with the ballast material, should weigh between 35 lbs (minimum) and 50 lbs (maximum). The ballast may be sand in one to three sandbags separate from the base, sand in a sand-filled plastic base, or other ballasting devices as approved by the Engineer. Stacking of sandbags will be allowed, however height of sandbags above pavement surface may not exceed 12 inches.
- Bases with built-in ballast shall weigh between 40 lbs. and 50 lbs. Built-in ballast can be constructed of an integral crumb rubber base or a solid rubber base.
- Recycled truck tire sidewalls may be used for ballast on drums approved for this type of ballast on the CWZTCD list.
- The ballast shall not be heavy objects, water, or any material that would become hazardous to motorists, pedestrians, or workers when the drum is struck by a vehicle.
- When used in regions susceptible to freezing, drums shall have drainage holes in the bottoms so that water will not collect and freeze becoming a hazard when struck by a vehicle.
- Ballast shall not be placed on top of drums.
- Adhesives may be used to secure base of drums to pavement.

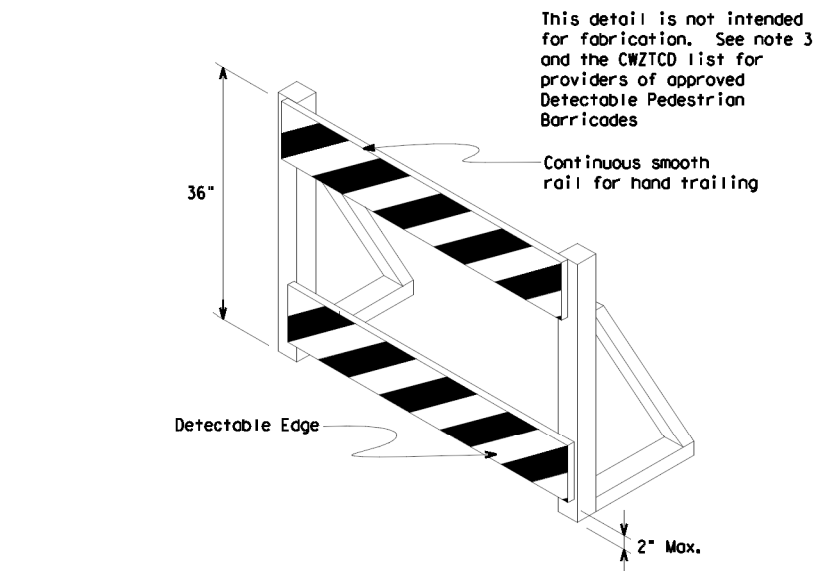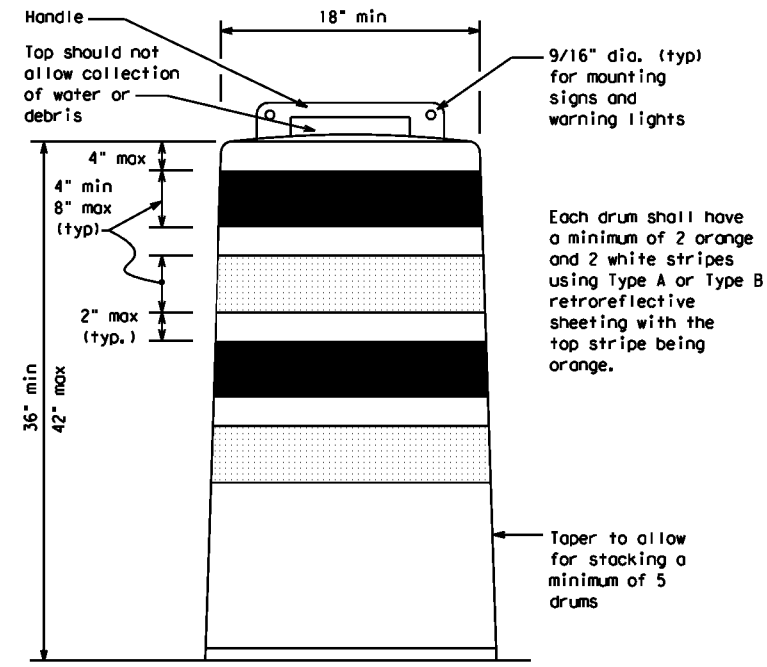

**DETECTABLE PEDESTRIAN BARRICADES**

- When existing pedestrian facilities are disrupted, closed, or relocated in a TTC zone, the temporary facilities shall be detectable and include accessibility features consistent with the features present in the existing pedestrian facility. Refer to WZ(BTS-2) for Pedestrian Control requirements for Sidewalk Diversions, Sidewalk Detours and Crosswalk Closures.
- Where pedestrians with visual disabilities normally use the closed sidewalk, a Detectable Pedestrian Barricade shall be placed across the full width of the closed sidewalk instead of a Type 3 Barricade.
- Detectable pedestrian barricades similar to the one pictured above, longitudinal channelizing devices, some concrete barriers, and wood or chain link fencing with a continuous detectable edging can satisfactorily delineate a pedestrian path.
- Tape, rope, or plastic chain strung between devices are not detectable, do not comply with the design standards in the "Americans with Disabilities Act Accessibility Guidelines (ADAAG)" and should not be used as a control for pedestrian movements.
- Warning lights shall not be attached to detectable pedestrian barricades.
- Detectable pedestrian barricades should use 8" nominal barricade rails as shown on BC(10) provided that the top rail provides a smooth continuous rail suitable for hand trailing with no splinters, burrs, or sharp edges.

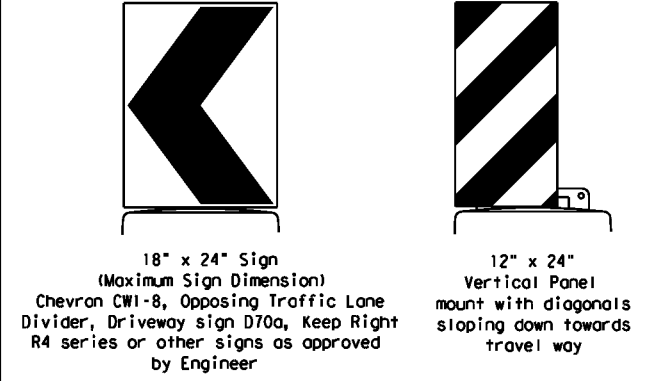

Plywood, Aluminum or Metal sign substrates shall NOT be used on plastic drums

**SIGNS, CHEVRONS, AND VERTICAL PANELS MOUNTED ON PLASTIC DRUMS**


- Signs used on plastic drums shall be manufactured using substrates listed on the CWZTCD.
- Chevrons and other work zone signs with an orange background shall be manufactured with Type B<sub>FL</sub> or Type C<sub>FL</sub> Orange sheeting meeting the color and retroreflectivity requirements of DMS-8300, "Sign Face Material," unless otherwise specified in the plans.
- Vertical Panels shall be manufactured with orange and white sheeting meeting the requirements of DMS-8300 Type A or Type B. Diagonal stripes on Vertical Panels shall slope down toward the intended traveled lane.
- Other sign messages (text or symbolic) may be used as approved by the Engineer. Sign dimensions shall not exceed 18 inches in width or 24 inches in height, except for the R9 series signs discussed in note 8 below.
- Signs shall be installed using a 1/2 inch bolt (nominal) and nut, two washers, and one locking washer for each connection.
- Mounting bolts and nuts shall be fully engaged and adequately torqued. Bolts should not extend more than 1/2 inch beyond nuts.
- Chevrons may be placed on drums on the outside of curves, on merging tapers or on shifting tapers. When used in these locations, they may be placed on every drum or spaced not more than on every third drum. A minimum of three (3) should be used at each location called for in the plans.
- R9-9, R9-10, R9-11 and R9-11a Sidewalk Closed signs which are 24 inches wide may be mounted on plastic drums, with approval of the Engineer.

SHEET 8 OF 12

		Traffic Safety Division Standard	
BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES			
BC (8) - 21			
FILE: bc-21.dgn	DWG: TxDOT	CHK: TxDOT	APP: TxDOT
© TxDOT November 2002	CONT: 015612	SECT: 020	HIGHWAY: SS 447
REVISIONS		SHEET NO.	
4-03 8-14			
9-07 5-21			
7-13	WFS	WICHITA	26


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 10/31/2023 4:30:38 PM  
 FILE: \\txdot.projectwiseonline.com:TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\2 - TCP\BC-21.dgn

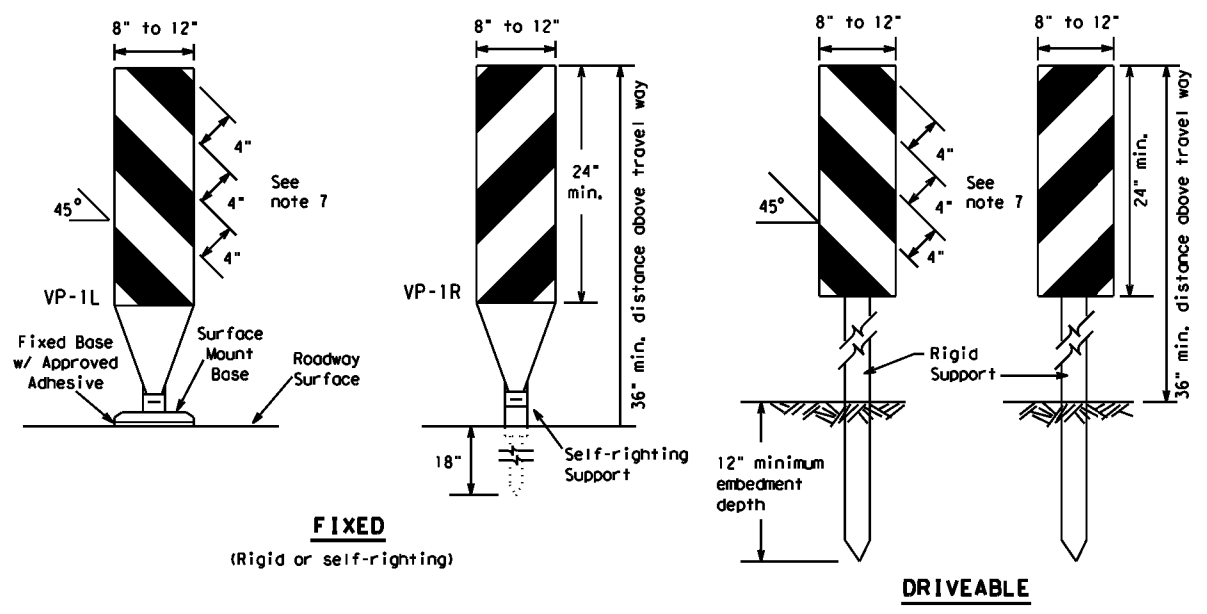

**FIXED**  
(Rigid or self-righting)


**DRIVEABLE**

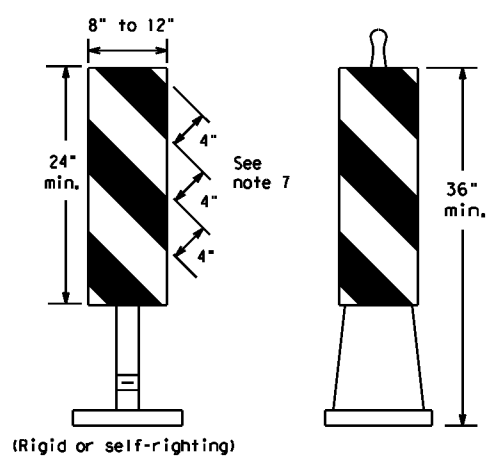

**PORTABLE**


**VERTICAL PANELS (VPs)**

1. Vertical Panels (VP's) are normally used to channelize traffic or divide opposing lanes of traffic.
2. VP's may be used in daytime or nighttime situations. They may be used at the edge of shoulder drop-offs and other areas such as lane transitions where positive daytime and nighttime delineation is required. The Engineer/Inspector shall refer to the Roadway Design Manual for additional requirements on the use VP's for drop-offs.
3. VP's should be mounted back to back if used at the edge of cuts adjacent to two-way two lane roadways. Stripes are to be reflective orange and reflective white and should always slope downward toward the travel lane.
4. VP's used on expressways and freeways or other high speed roadways, may have more than 270 square inches of retroreflective area facing traffic.
5. Self-righting supports are available with portable base. See "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
6. Sheeting for the VP's shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300, unless noted otherwise.
7. Where the height of reflective material on the vertical panel is 36 inches or greater, a panel stripe of 6 inches shall be used.

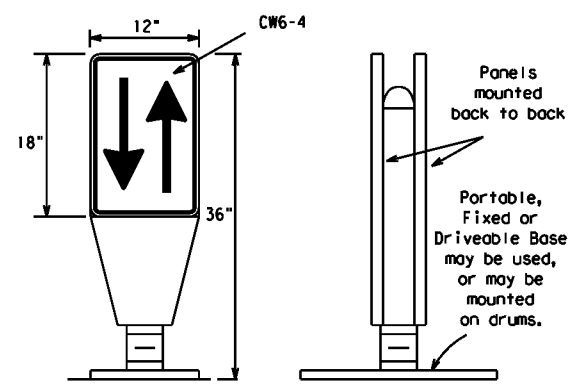


**OPPOSING TRAFFIC LANE DIVIDERS (OTLD)**

1. Opposing Traffic Lane Dividers (OTLD) are delineation devices designed to convert a normal one-way roadway section to two-way operation. OTLD's are used on temporary centerlines. The upward and downward arrows on the sign's face indicate the direction of traffic on either side of the divider. The base is secured to the pavement with an adhesive or rubber weight to minimize movement caused by a vehicle impact or wind gust.
2. The OTLD may be used in combination with 42" cones or VPs.
3. Spacing between the OTLD shall not exceed 500 feet. 42" cones or VPs placed between the OTLD's should not exceed 100 foot spacing.
4. The OTLD shall be orange with a black non-reflective legend. Sheeting for the OTLD shall be retroreflective Type B<sub>FL</sub> or Type C<sub>FL</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.

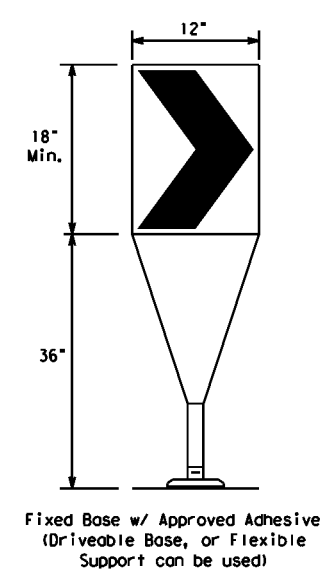

1. The chevron shall be a vertical rectangle with a minimum size of 12 by 18 inches.
2. Chevrons are intended to give notice of a sharp change of alignment with the direction of travel and provide additional emphasis and guidance for vehicle operators with regard to changes in horizontal alignment of the roadway.
3. Chevrons, when used, shall be erected on the outside of a sharp curve or turn, or on the far side of an intersection. They shall be in line with and at right angles to approaching traffic. Spacing should be such that the motorist always has three in view, until the change in alignment eliminates its need.
4. To be effective, the chevron should be visible for at least 500 feet.
5. Chevrons shall be orange with a black nonreflective legend. Sheeting for the chevron shall be retroreflective Type B<sub>FL</sub> or Type C<sub>FL</sub> conforming to Departmental Material Specification DMS-8300, unless noted otherwise. The legend shall meet the requirements of DMS-8300.
6. For Long Term Stationary use on tapers or transitions on freeways and divided highways, self-righting chevrons may be used to supplement plastic drums but not to replace plastic drums.

**CHEVRONS**

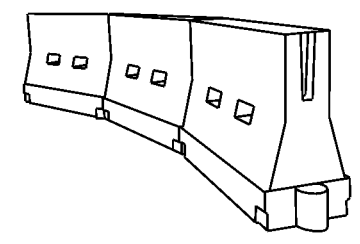

**LONGITUDINAL CHANNELIZING DEVICES (LCD)**

1. LCDs are crashworthy, lightweight, deformable devices that are highly visible, have good target value and can be connected together. They are not designed to contain or redirect a vehicle on impact.
2. LCDs may be used instead of a line of cones or drums.
3. LCDs shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
4. LCDs should not be used to provide positive protection for obstacles, pedestrians or workers.
5. LCDs shall be supplemented with retroreflective delineation as required for temporary barriers on BC(7) when placed roughly parallel to the travel lanes.
6. LCDs used as barricades placed perpendicular to traffic should have at least one row of reflective sheeting meeting the requirements for barricade rails as shown on BC(10). Place reflective sheeting near the top of the LCD along the full length of the device.

**WATER BALLASTED SYSTEMS USED AS BARRIERS**

1. Water ballasted systems used as barriers shall not be used solely to channelize road users, but also to protect the work space per the appropriate Manual for Assessing Safety Hardware (MASH) crashworthiness requirements based on roadway speed and barrier application.
2. Water ballasted systems used to channelize vehicular traffic shall be supplemented with retroreflective delineation or channelizing devices to improve daytime/nighttime visibility. They may also be supplemented with pavement markings.
3. Water ballasted systems used as barriers shall be placed in accordance to application and installation requirements specific to the device, and used only when shown on the CWZTCD list.
4. Water ballasted systems used as barriers should not be used for a merging taper except in low speed (less than 45 MPH) urban areas. When used on a taper in a low speed urban area, the taper shall be delineated and the taper length should be designed to optimize road user operations considering the available geometric conditions.
5. When water ballasted systems used as barriers have blunt ends exposed to traffic, they should be attenuated as per manufacturer recommendations or flared to a point outside the clear zone.

If used to channelize pedestrians, longitudinal channelizing devices or water ballasted systems must have a continuous detectable bottom for users of long canes and the top of the unit shall not be less than 32 inches in height.

**HOLLOW OR WATER BALLASTED SYSTEMS USED AS LONGITUDINAL CHANNELIZING DEVICES OR BARRIERS**

**GENERAL NOTES**

1. Work Zone channelizing devices illustrated on this sheet may be installed in close proximity to traffic and are suitable for use on high or low speed roadways. The Engineer/Inspector shall ensure that spacing and placement is uniform and in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
2. Channelizing devices shown on this sheet may have a driveable, fixed or portable base. The requirement for self-righting channelizing devices must be specified in the General Notes or other plan sheets.
3. Channelizing devices on self-righting supports should be used in work zone areas where channelizing devices are frequently impacted by errant vehicles or vehicle related wind gusts making alignment of the channelizing devices difficult to maintain. Locations of these devices shall be detailed elsewhere in the plans. These devices shall conform to the TMUTCD and the "Compliant Work Zone Traffic Control Devices List" (CWZTCD).
4. The Contractor shall maintain devices in a clean condition and replace damaged, nonreflective, faded, or broken devices and bases as required by the Engineer/Inspector. The Contractor shall be required to maintain proper device spacing and alignment.
5. Portable bases shall be fabricated from virgin and/or recycled rubber. The portable bases shall weigh a minimum of 30 lbs.
6. Pavement surfaces shall be prepared in a manner that ensures proper bonding between the adhesives, the fixed mount bases and the pavement surface. Adhesives shall be prepared and applied according to the manufacturer's recommendations.
7. The installation and removal of channelizing devices shall not cause detrimental effects to the final pavement surfaces, including pavement surface discoloration or surface integrity. Driveable bases shall not be permitted on final pavement surfaces. The Engineer/Inspector shall approve all application and removal procedures of fixed bases.

Posted Speed	Formula	Minimum Desirable Taper Lengths **			Suggested Maximum Spacing of Channelizing Devices	
		10' Offset	11' Offset	12' Offset	On a Taper	On a Tangent
30	L = WS <sup>2</sup> / 60	150'	165'	180'	30'	60'
35		205'	225'	245'	35'	70'
40		265'	295'	320'	40'	80'
45	L = WS	450'	495'	540'	45'	90'
50		500'	550'	600'	50'	100'
55		550'	605'	660'	55'	110'
60		600'	660'	720'	60'	120'
65		650'	715'	780'	65'	130'
70		700'	770'	840'	70'	140'
75		750'	825'	900'	75'	150'
80		800'	880'	960'	80'	160'

\*\*Taper lengths have been rounded off.  
 L=Length of Taper (FT.) W=Width of Offset (FT.)  
 S=Posted Speed (MPH)

**SUGGESTED MAXIMUM SPACING OF CHANNELIZING DEVICES AND MINIMUM DESIRABLE TAPER LENGTHS**

SHEET 9 OF 12



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC (9) - 21**


FILE: bc-21.dgn	DWG: TxDOT	CHK: TxDOT	APP: TxDOT	CR: TxDOT
© TxDOT November 2002	CONT: 0156	SECT: 12	JOB: 020	HIGHWAY: SS 447
REVISIONS: 9-07 8-14	DIST: WFS	COUNTY: WICHITA	SHEET NO.: 27	

DATE: 10/31/2023 4:30:44 PM  
 FILE: P:\w\txdot.projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\2 - TCP\BC-21.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


**TYPE 3 BARRICADES**

1. Refer to the Compliant Work Zone Traffic Control Devices List (CWZTCD) for details of the Type 3 Barricades and a list of all materials used in the construction of Type 3 Barricades.
2. Type 3 Barricades shall be used at each end of construction projects closed to all traffic.
3. Barricades extending across a roadway should have stripes that slope downward in the direction toward which traffic must turn in detouring. When both right and left turns are provided, the chevron striping may slope downward in both directions from the center of the barricade. Where no turns are provided at a closed road, striping should slope downward in both directions toward the center of roadway.
4. Striping of rails, for the right side of the roadway, should slope downward to the left. For the left side of the roadway, striping should slope downward to the right.
5. Identification markings may be shown only on the back of the barricade rails. The maximum height of letters and/or company logos used for identification shall be 1".
6. Barricades shall not be placed parallel to traffic unless an adequate clear zone is provided.
7. Warning lights shall NOT be installed on barricades.
8. Where barricades require the use of weights to keep from turning over, the use of sandbags with dry, cohesionless sand is recommended. The sandbags will be tied shut to keep the sand from spilling and to maintain a constant weight. Sand bags shall not be stacked in a manner that covers any portion of a barricade rails reflective sheeting. Rock, concrete, iron, steel or other solid objects will NOT be permitted. Sandbags should weigh a minimum of 35 lbs and a maximum of 50 lbs. Sandbags shall be made of a durable material that tears upon vehicular impact. Rubber (such as tire inner tubes) shall not be used for sandbags. Sandbags shall only be placed along or upon the base supports of the device and shall not be suspended above ground level or hung with rope, wire, chains or other fasteners.
9. Sheeting for barricades shall be retroreflective Type A or Type B conforming to Departmental Material Specification DMS-8300 unless otherwise noted.

Barricades shall NOT be used as a sign support.

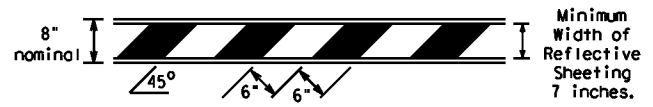


**TYPICAL STRIPING DETAIL FOR BARRICADE RAIL**

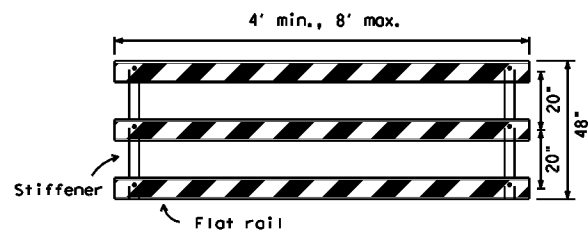


Stiffener may be inside or outside of support, but no more than 2 stiffeners shall be allowed on one barricade.

**TYPICAL PANEL DETAIL FOR SKID OR POST TYPE BARRICADES**

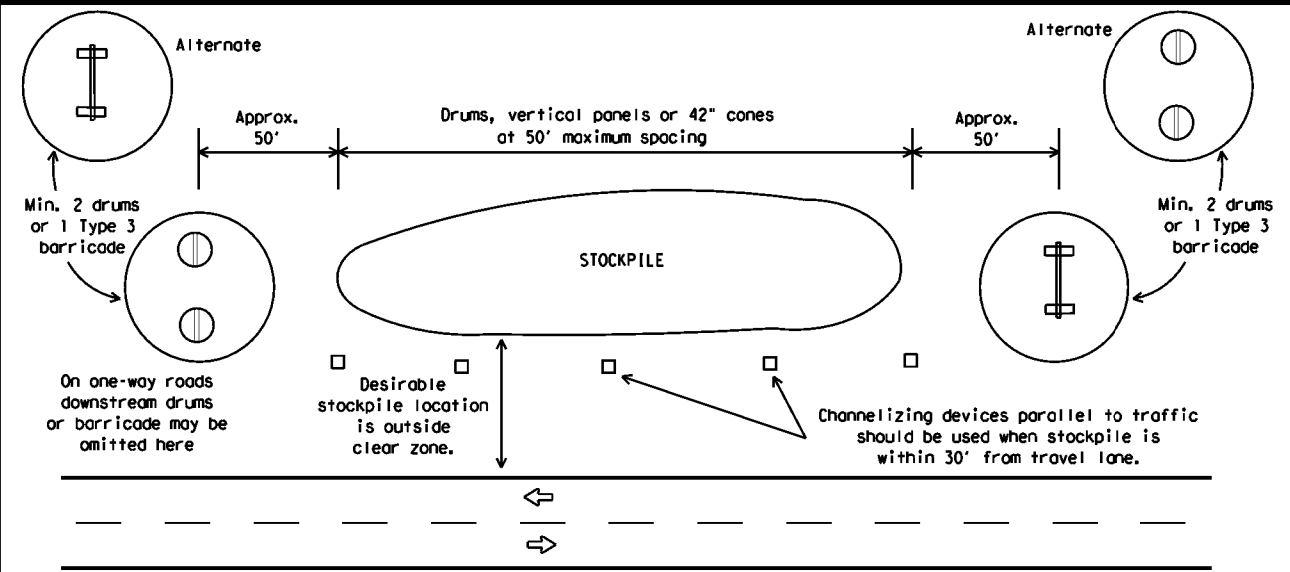


**TRAFFIC CONTROL FOR MATERIAL STOCKPILES**

Each roadway of a divided highway shall be barricaded in the same manner.

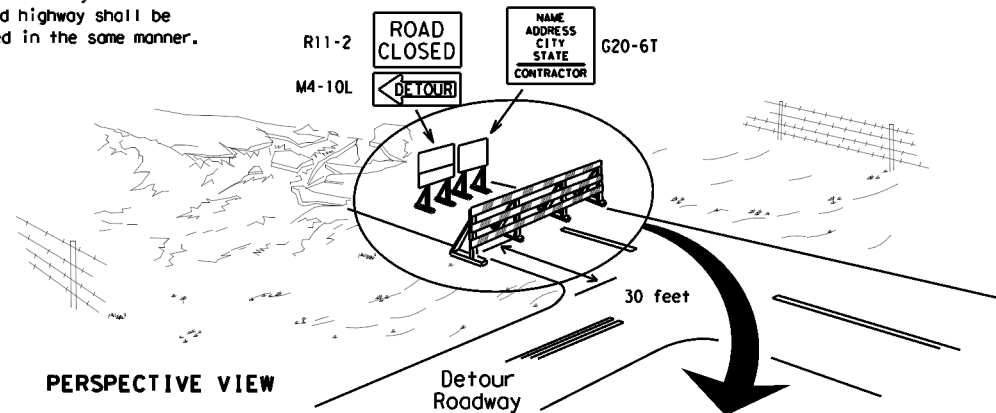

PERSPECTIVE VIEW


The three rails on Type 3 barricades shall be reflectorized orange and reflective white stripes on one side facing one-way traffic and both sides for two-way traffic. Barricade striping should slant downward in the direction of detour.

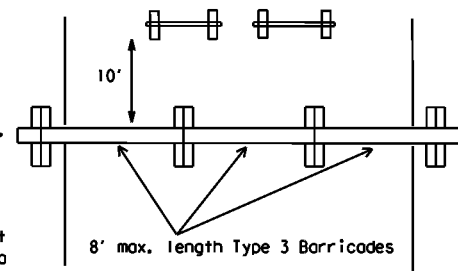


PLAN VIEW

1. Signs should be mounted on independent supports at a 7 foot mounting height in center of roadway. The signs should be a minimum of 10 feet behind Type 3 Barricades.
2. Advance signing shall be as specified elsewhere in the plans.

**TYPE 3 BARRICADE (POST AND SKID) TYPICAL APPLICATION**

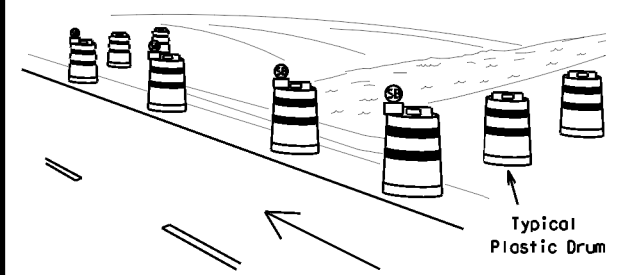

PERSPECTIVE VIEW

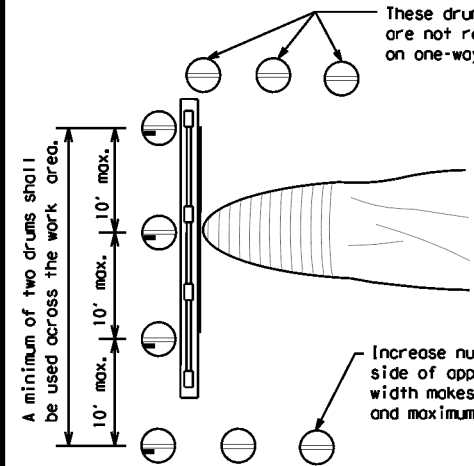


PLAN VIEW

1. Where positive redirection capability is provided, drums may be omitted.
2. Plastic construction fencing may be used with drums for safety as required in the plans.
3. Vertical Panels on flexible support may be substituted for drums when the shoulder width is less than 4 feet.
4. When the shoulder width is greater than 12 feet, steady-burn lights may be omitted if drums are used.
5. Drums must extend the length of the culvert widening.

LEGEND	
	Plastic drum
	Plastic drum with steady burn light or yellow warning reflector
	Steady burn warning light or yellow warning reflector

**CULVERT WIDENING OR OTHER ISOLATED WORK WITHIN THE PROJECT LIMITS**

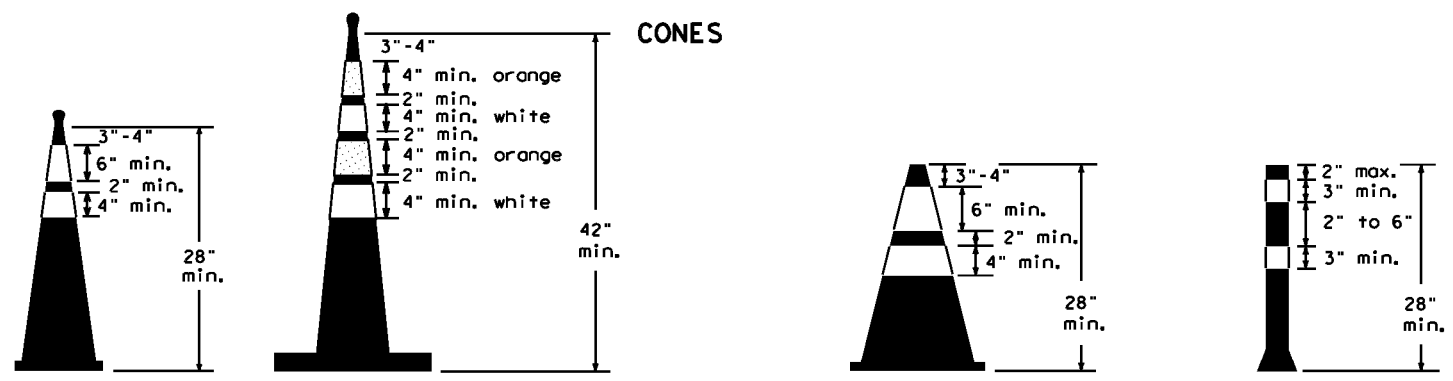

Two-Piece cones

One-Piece cones

Tubular Marker

28" Cones shall have a minimum weight of 9 1/2 lbs.  
 42" 2-piece cones shall have a minimum weight of 30 lbs. including base.

1. Traffic cones and tubular markers shall be predominantly orange, and meet the height and weight requirements shown above.
2. One-piece cones have the body and base of the cone molded in one consolidated unit. Two-piece cones have a cone shaped body and a separate rubber base, or ballast, that is added to keep the device upright and in place.
3. Two-piece cones may have a handle or loop extending up to 8" above the minimum height shown, in order to aid in retrieving the device.
4. Cones or tubular markers shall have white or white and orange reflective bands as shown above. The reflective bands shall have a smooth, sealed outer surface and meet the requirements of Departmental Material Specification DMS-8300 Type A or Type B.
5. 28" cones and tubular markers are generally suitable for short duration and short-term stationary work as defined on BC(4). These should not be used for intermediate-term or long-term stationary work unless personnel is on-site to maintain them in their proper upright position.
6. 42" two-piece cones, vertical panels or drums are suitable for all work zone durations.
7. Cones or tubular markers used on each project should be of the same size and shape.



**BARRICADE AND CONSTRUCTION CHANNELIZING DEVICES**

**BC (10) - 21**

FILE: bc-21.dgn	DWG: TxDOT	CR: TxDOT	REV: TxDOT	CHK: TxDOT
© TxDOT November 2002	CONT: 0156	SECT: 12	JOB: 020	HIGHWAY: SS 447
REVISIONS:	0156	12	020	SS 447
9-07 8-14	DIST: WFS	COUNTY: WICHITA	SHEET NO. 28	
7-13 5-21				

## WORK ZONE PAVEMENT MARKINGS

### GENERAL

- The Contractor shall be responsible for maintaining work zone and existing pavement markings, in accordance with the standard specifications and special provisions, on all roadways open to traffic within the CSJ limits unless otherwise stated in the plans.
- Color, patterns and dimensions shall be in conformance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD).
- Additional supplemental pavement marking details may be found in the plans or specifications.
- Pavement markings shall be installed in accordance with the TMUTCD and as shown on the plans.
- When short term markings are required on the plans, short term markings shall conform with the TMUTCD, the plans and details as shown on the Standard Plan Sheet WZ(STPM).
- When standard pavement markings are not in place and the roadway is opened to traffic, DO NOT PASS signs shall be erected to mark the beginning of the sections where passing is prohibited and PASS WITH CARE signs at the beginning of sections where passing is permitted.
- All work zone pavement markings shall be installed in accordance with Item 662, "Work Zone Pavement Markings."

### RAISED PAVEMENT MARKERS

- Raised pavement markers are to be placed according to the patterns on BC(12).
- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and Departmental Material Specification DMS-4200 or DMS-4300.

### PREFABRICATED PAVEMENT MARKINGS

- Removable prefabricated pavement markings shall meet the requirements of DMS-8241.
- Non-removable prefabricated pavement markings (foil back) shall meet the requirements of DMS-8240.


### MAINTAINING WORK ZONE PAVEMENT MARKINGS

- The Contractor will be responsible for maintaining work zone pavement markings within the work limits.
- Work zone pavement markings shall be inspected in accordance with the frequency and reporting requirements of work zone traffic control device inspections as required by Form 599.
- The markings should provide a visible reference for a minimum distance of 300 feet during normal daylight hours and 160 feet when illuminated by automobile low-beam headlights at night, unless sight distance is restricted by roadway geometrics.
- Markings failing to meet this criteria within the first 30 days after placement shall be replaced at the expense of the Contractor as per Specification Item 662.

### REMOVAL OF PAVEMENT MARKINGS

- Pavement markings that are no longer applicable, could create confusion or direct a motorist toward or into the closed portion of the roadway shall be removed or obliterated before the roadway is opened to traffic.
- The above shall not apply to detours in place for less than three days, where flaggers and/or sufficient channelizing devices are used in lieu of markings to outline the detour route.
- Pavement markings shall be removed to the fullest extent possible, so as not to leave a discernable marking. This shall be by any method approved by TxDOT Specification Item 677 for "Eliminating Existing Pavement Markings and Markers".
- The removal of pavement markings may require resurfacing or seal coating portions of the roadway as described in Item 677.
- Subject to the approval of the Engineer, any method that proves to be successful on a particular type pavement may be used.
- Blast cleaning may be used but will not be required unless specifically shown in the plans.
- Over-painting of the markings SHALL NOT BE permitted.
- Removal of raised pavement markers shall be as directed by the Engineer.
- Removal of existing pavement markings and markers will be paid for directly in accordance with Item 677, "ELIMINATING EXISTING PAVEMENT MARKINGS AND MARKERS," unless otherwise stated in the plans.
- Black-out marking tape may be used to cover conflicting existing markings for periods less than two weeks when approved by the Engineer.

## Temporary Flexible-Reflective Roadway Marker Tabs

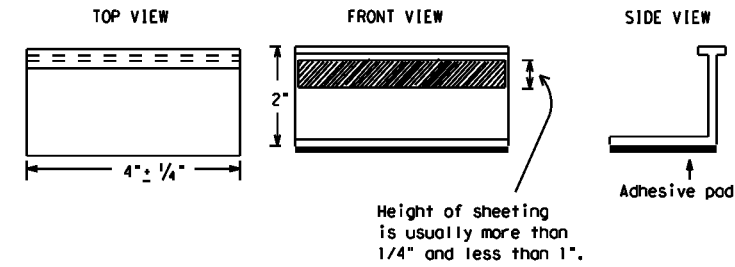

**STAPLES OR NAILS SHALL NOT BE USED TO SECURE  
TEMPORARY FLEXIBLE-REFLECTIVE ROADWAY MARKER  
TABS TO THE PAVEMENT SURFACE**

- Temporary flexible-reflective roadway marker tabs used as guidemarks shall meet the requirements of DMS-8242.
- Tabs detailed on this sheet are to be inspected and accepted by the Engineer or designated representative. Sampling and testing is not normally required, however at the option of the Engineer, either "A" or "B" below may be imposed to assure quality before placement on the roadway.
  - Select five (5) or more tabs at random from each lot or shipment and submit to the Construction Division, Materials and Pavement Section to determine specification compliance.
  - Select five (5) tabs and perform the following test. Affix five (5) tabs at 24 inch intervals on an asphaltic pavement in a straight line. Using a medium size passenger vehicle or pickup, run over the markers with the front and rear tires at a speed of 35 to 40 miles per hour, four (4) times in each direction. No more than one (1) out of the five (5) reflective surfaces shall be lost or displaced as a result of this test.
- Small design variances may be noted between tab manufacturers.
- See Standard Sheet WZ(STPM) for tab placement on new pavements. See Standard Sheet TCP(7-1) for tab placement on seal coat work.

### RAISED PAVEMENT MARKERS USED AS GUIDEMARKS

- Raised pavement markers used as guidemarks shall be from the approved product list, and meet the requirements of DMS-4200.
- All temporary construction raised pavement markers provided on a project shall be of the same manufacturer.
- Adhesive for guidemarks shall be bituminous material hot applied or butyl rubber pad for all surfaces, or thermoplastic for concrete surfaces.

Guidemarks shall be designated as:  
 YELLOW - (two amber reflective surfaces with yellow body).  
 WHITE - (one silver reflective surface with white body).

DEPARTMENTAL MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
TRAFFIC BUTTONS	DMS-4300
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240
TEMPORARY REMOVABLE, PREFABRICATED PAVEMENT MARKINGS	DMS-8241
TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS	DMS-8242

A list of prequalified reflective raised pavement markers, non-reflective traffic buttons, roadway marker tabs and other pavement markings can be found at the Material Producer List web address shown on BC(1).

SHEET 11 OF 12




## BARRICADE AND CONSTRUCTION PAVEMENT MARKINGS

**BC(11)-21**


FILE: bc-21.dgn	DWG: TxDOT	CHK: TxDOT	DRW: TxDOT	CR: TxDOT	
© TxDOT February 1998	CONT	SECT	JOB	HIGHWAY	
REVISIONS		0156	12	020	SS 447
2-98	9-07	5-21			
1-02	7-13				
11-02	8-14				
	DIST	COUNTY		SHEET NO.	
	WFS	WICHITA		29	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.  
 DATE: 10/31/2023 4:30:48 PM  
 FILE: pw://txdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/2 - TCP/BC-21.dgn

## PAVEMENT MARKING PATTERNS

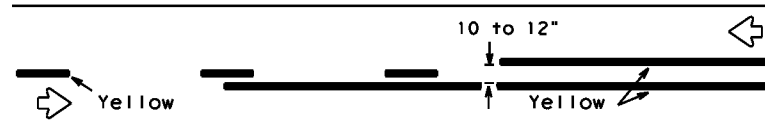


REFLECTORIZED PAVEMENT MARKINGS - PATTERN A

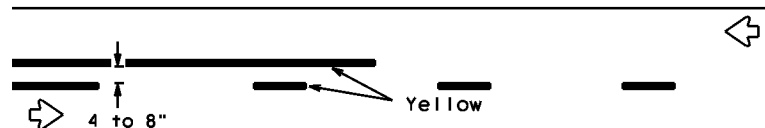


REFLECTORIZED PAVEMENT MARKINGS - PATTERN B

Pattern A is the TXDOT Standard, however Pattern B may be used if approved by the Engineer. Prefabricated markings may be substituted for reflectorized pavement markings.




RAISED PAVEMENT MARKERS - PATTERN A

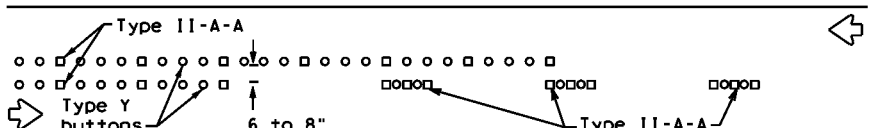


RAISED PAVEMENT MARKERS - PATTERN B

## CENTER LINE & NO-PASSING ZONE BARRIER LINES FOR TWO-LANE, TWO-WAY HIGHWAYS

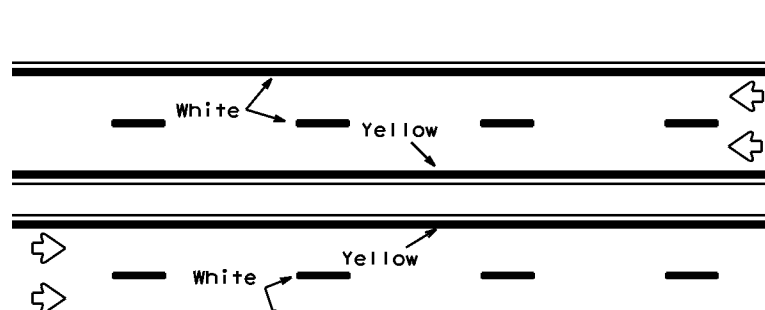


REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectorized pavement markings.

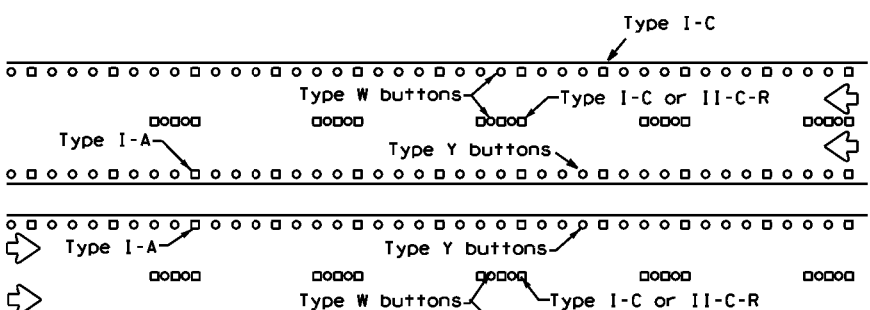


RAISED PAVEMENT MARKERS

## EDGE & LANE LINES FOR DIVIDED HIGHWAY

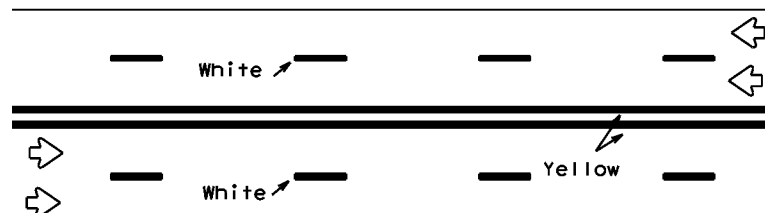


REFLECTORIZED PAVEMENT MARKINGS

Prefabricated markings may be substituted for reflectorized pavement markings.

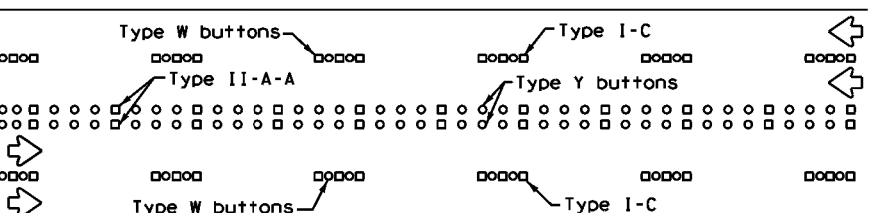


RAISED PAVEMENT MARKERS

## LANE & CENTER LINES FOR MULTILANE UNDIVIDED HIGHWAYS

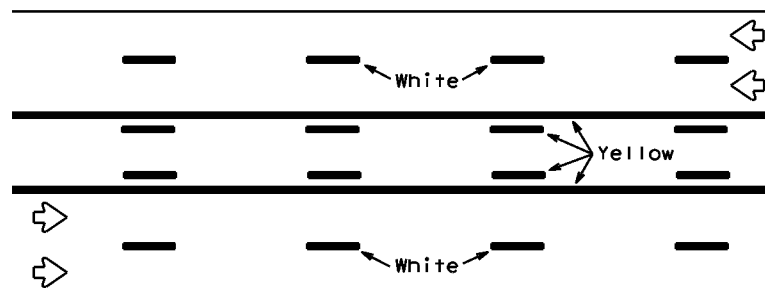

REFLECTORIZED PAVEMENT MARKINGS


Prefabricated markings may be substituted for reflectorized pavement markings.

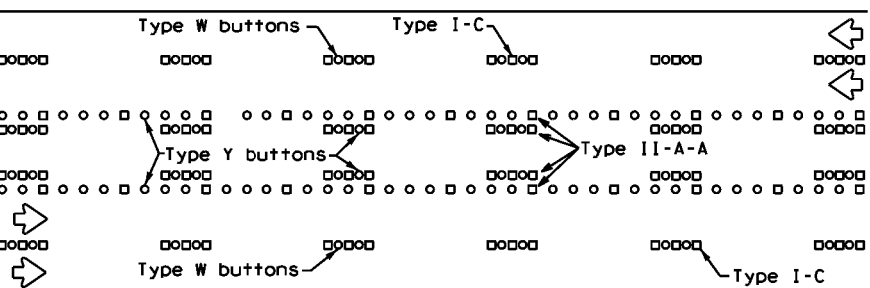




RAISED PAVEMENT MARKERS

## TWO-WAY LEFT TURN LANE


## STANDARD WORK ZONE PAVEMENT MARKINGS DETAILS

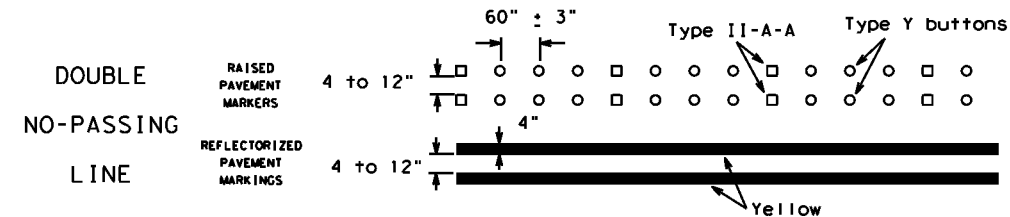

### SOLID LINES

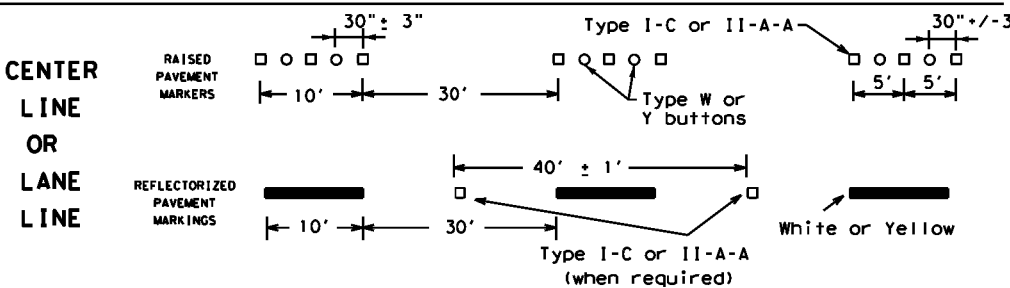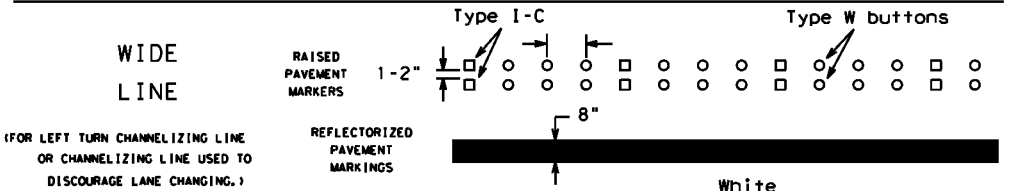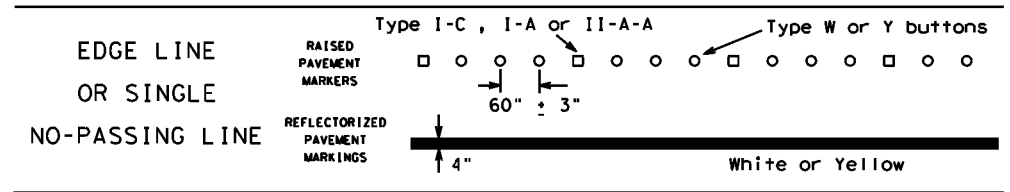


### BROKEN LINES

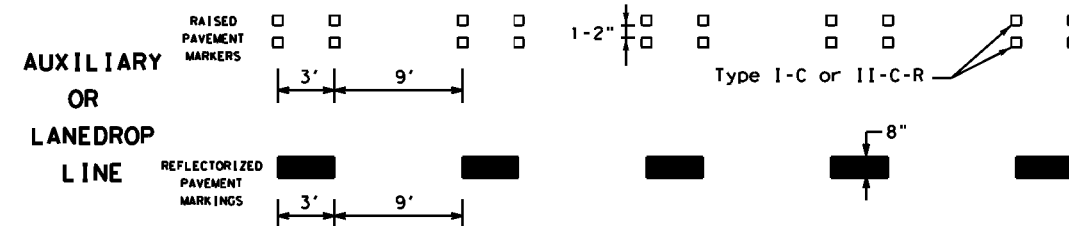

### REMOVABLE MARKINGS WITH RAISED PAVEMENT MARKERS

If raised pavement markers are used to supplement REMOVABLE markings, the markers shall be applied to the top of the tape at the approximate mid length of tape used for broken lines or at 20 foot spacing for solid lines. This allows an easier removal of raised pavement markers and tape.

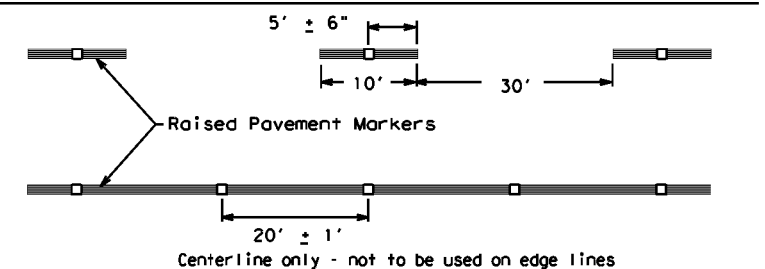

SHEET 12 OF 12



## BARRICADE AND CONSTRUCTION PAVEMENT MARKING PATTERNS

BC (12) - 21

Raised pavement markers used as standard pavement markings shall be from the approved products list and meet the requirements of Item 672 "RAISED PAVEMENT MARKERS."

FILE: bc-21.dgn	DWG: TxDOT	CHK: TxDOT	DRW: TxDOT	CR: TxDOT
©TxDOT February 1998	CONT	SECT	JOB	HIGHWAY
REVISIONS	0156	12	020	SS 447
1-97 9-07 5-21	DIST	COUNTY	SHEET NO.	
2-98 7-13	WFS	WICHITA	30	
11-02 8-14				


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TXDOT for any purpose whatsoever. TXDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.  
 DATE: 10/31/2023 4:30:52 PM  
 FILE: D:\txdot\projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\2 - TCP\BC-21.dgn









DATE: 10/31/2023 4:31:20 PM  
 FILE: p:\t\dot\project\wiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\03090909\03090909.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions resulting from its use.

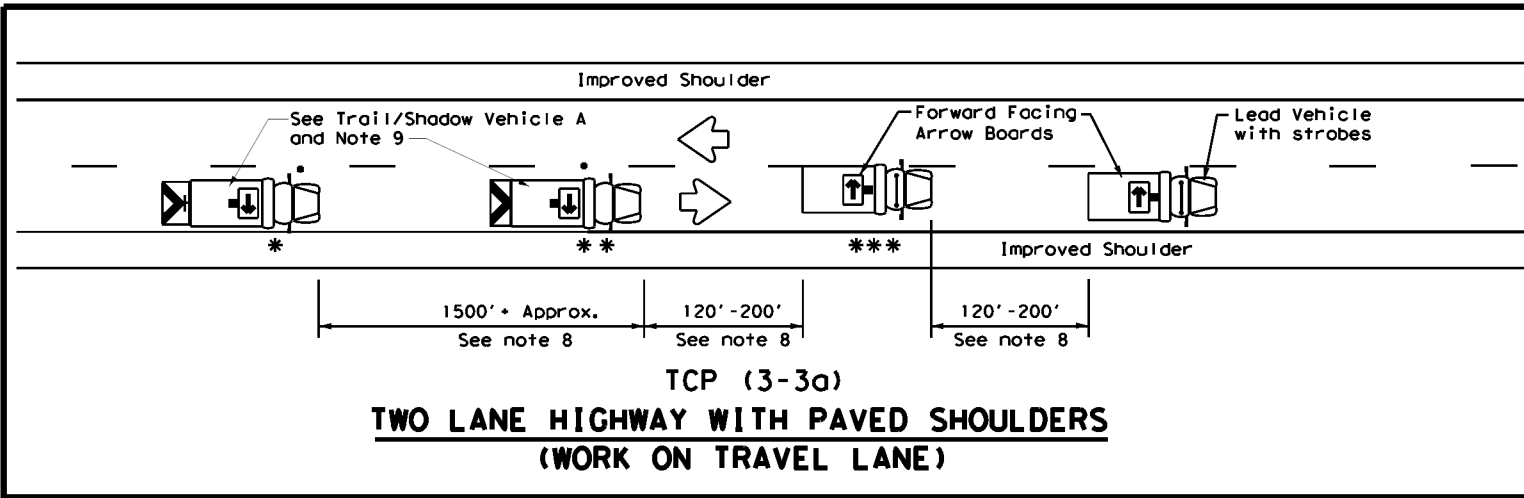


**TCP (3-3a)**  
**TWO LANE HIGHWAY WITH PAVED SHOULDERS**  
**(WORK ON TRAVEL LANE)**

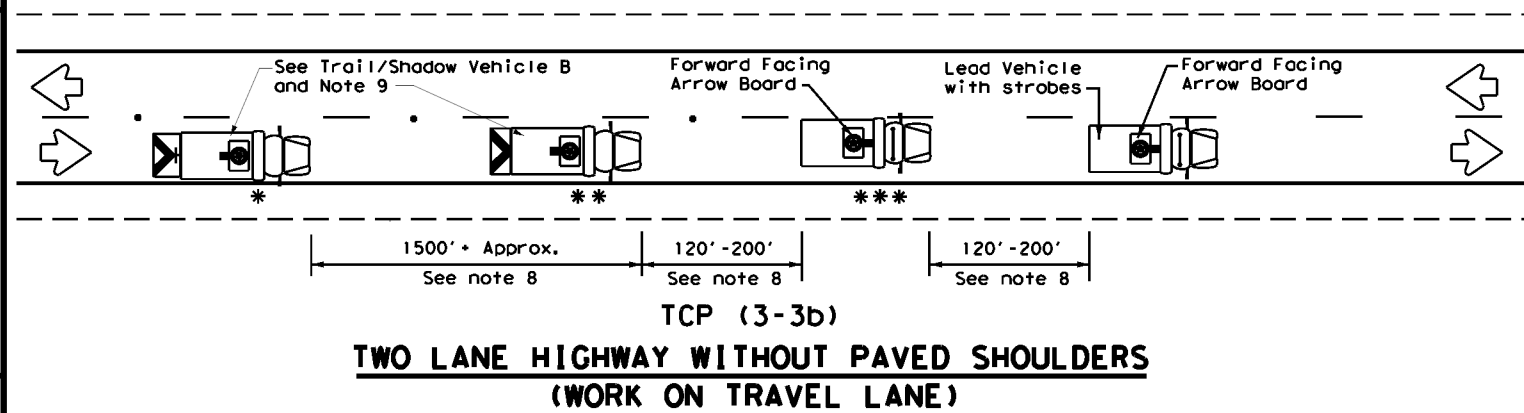


**TCP (3-3b)**  
**TWO LANE HIGHWAY WITHOUT PAVED SHOULDERS**  
**(WORK ON TRAVEL LANE)**

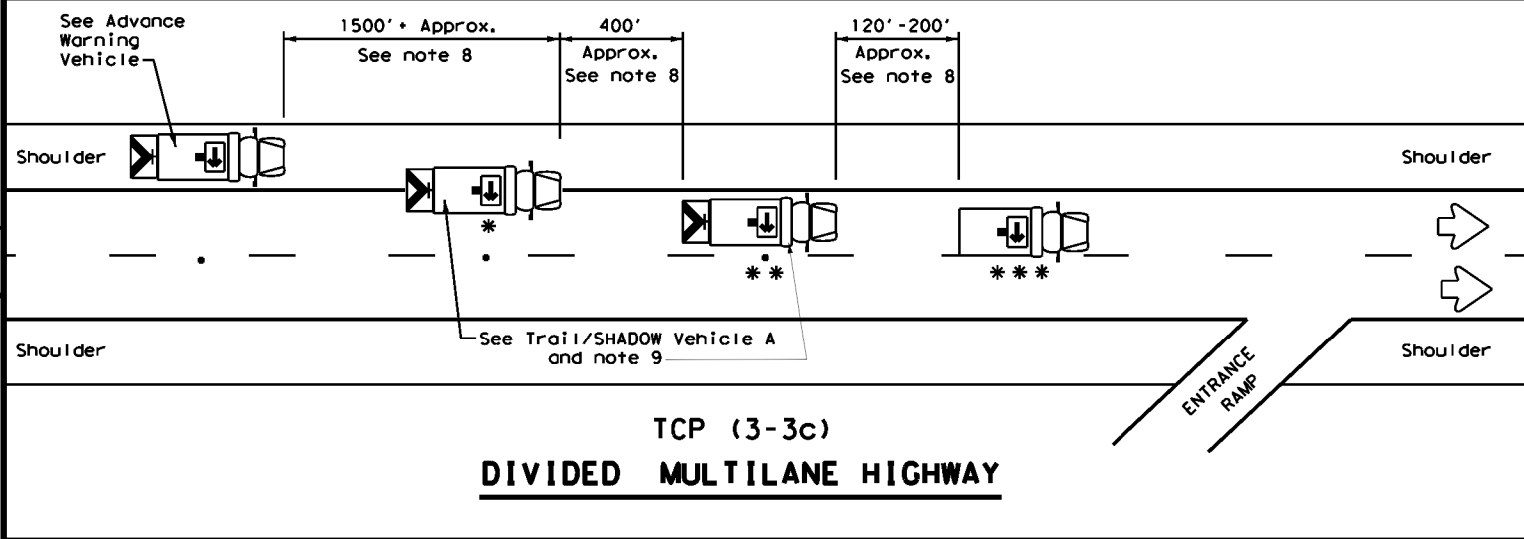

**TCP (3-3c)**  
**DIVIDED MULTILANE HIGHWAY**

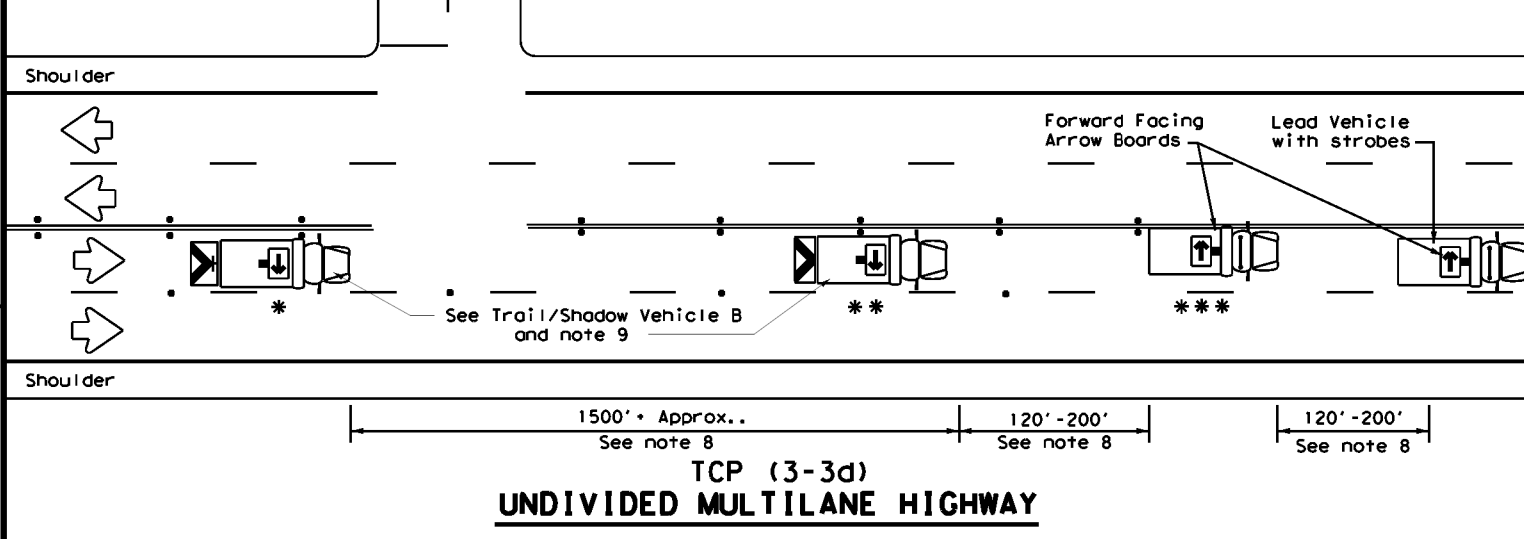


**TCP (3-3d)**  
**UNDIVIDED MULTILANE HIGHWAY**

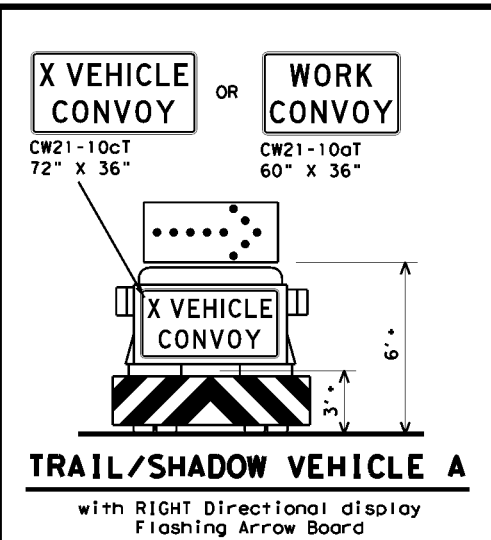


**TRAIL/SHADOW VEHICLE A**

with RIGHT Directional display  
Flashing Arrow Board

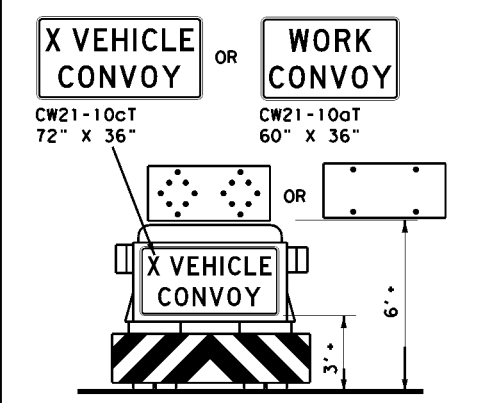


**TRAIL/SHADOW VEHICLE B**

with Flashing Arrow Board  
in Caution Mode

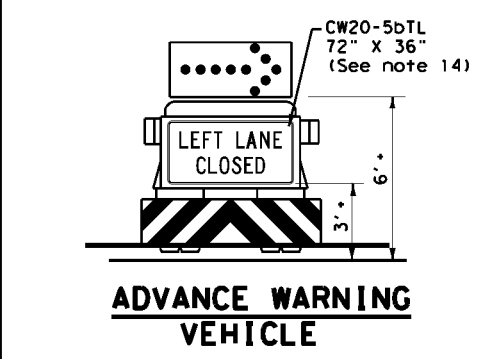

**ADVANCE WARNING VEHICLE**

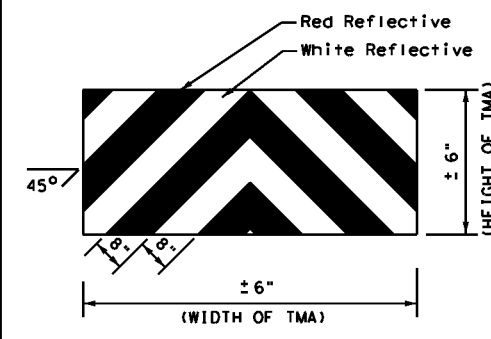

**STRIPING FOR TMA**

LEGEND		
* Trail Vehicle	ARROW BOARD DISPLAY	
** Shadow Vehicle		
*** Work Vehicle		RIGHT Directional
		LEFT Directional
		Double Arrow
		CAUTION (Alternating Diamond or 4 Corner Flash)

TYPICAL USAGE				
MOBILE	SHORT DURATION	SHORT TERM STATIONARY	INTERMEDIATE TERM STATIONARY	LONG TERM STATIONARY
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**GENERAL NOTES**

- TRAIL, SHADOW, and LEAD vehicles shall be equipped with arrow boards as illustrated. When a LEAD vehicle is not used on two way roads the WORK vehicle must have an arrow board. For divided roadways, the arrow board on the WORK vehicle is optional based on the type of work being performed. The Engineer will determine if the LEAD vehicle and/or TRAIL vehicle are required based on prevailing roadway conditions, traffic volume, and sight distance restrictions.
- The use of amber high intensity rotating, flashing, oscillating, or strobe lights on vehicles are required. Blue high intensity rotating, flashing, oscillating, or strobe lights when mounted on the driver's side of the vehicle may be operated simultaneously with the amber beacons or strobe lights.
- The use of truck mounted attenuators (TMA) on the SHADOW VEHICLE, ADVANCE WARNING and TRAIL VEHICLE are required.
- Reflective sheeting on the rear of the TMA shall meet or exceed the reflectivity and color requirements of DEPARTMENTAL MATERIAL SPECIFICATION DMS 8300, Type A.
- Flashing arrow boards shall be Type B or Type C as per the Barricade and Construction (BC) standards. The board shall be controlled from inside the vehicle.
- Each vehicle shall have two-way radio communication capability.
- When work convoys must change lanes, the TRAIL VEHICLE should change lanes first to shadow the other convoy vehicles.
- Vehicle spacing between the TRAIL VEHICLE and the SHADOW VEHICLE will vary depending on sight distance restrictions. Motorists approaching the convoy should be able to see the TRAIL VEHICLE in time to slow down and/or change lanes as they approach the TRAIL VEHICLE. Vehicle spacing between the WORK VEHICLE and SHADOW VEHICLE and vehicle spacing between WORK VEHICLE and LEAD VEHICLE may vary according to terrain, work activity and other factors.
- X VEHICLE CONVOY (CW21-10cT) or WORK CONVOY (CW21-10aT) signs shall be used on TRAIL VEHICLES and SHADOW VEHICLES as shown. As an option 48" x 48" diamond shaped WORK CONVOY (CW21-10T) or X VEHICLE CONVOY (CW21-10bT) signs may be used where adequate mounting space exists. When used, the X VEHICLE CONVOY sign shall have the number of the convoy vehicles displayed on the sign in the number designation "X" location. The X VEHICLE CONVOY sign shall not be used on the SHADOW VEHICLE if a TRAIL VEHICLE is used.
- For divided highways with two or three lanes in one direction, the appropriate LEFT LANE CLOSED (CW20-5bTL), RIGHT LANE CLOSED (CW20-5bTR), or CENTER LANE CLOSED (CW20-5dT) sign should be used on the Advance Warning Vehicle. As an option, a portable changeable message sign (PCMS) or truck mounted changeable message sign (TMCMS) with a minimum character height of 12", and displaying the same legend may be substituted for these signs. An appropriate directional arrow display, simulating the size and legibility of the flashing arrow board may be used in the second phase of the PCMS/TMCMS message. When this is done, the arrow board will not be required on the Advance Warning Vehicle.
- A double arrow shall not be displayed on the arrow board on the Advance Warning Vehicle.
- For divided highways with three or four lanes in each direction, use TCP(3-2).
- Standard diamond shape versions of the CW20-5 series signs may be used as an option if the rectangular signs shown are not available.
- The Advance Warning Vehicle may straddle the edgeline when Shoulder width makes it necessary.
- On two-lane two-way roadways, the work and protection vehicles should pull over periodically to allow motor vehicle traffic to pass. If motorists are not allowed to pass the work convoy, a DO NOT PASS (R4-1) sign should be placed on the back of the rearmost protection vehicle.

Texas Department of Transportation  
 Traffic Operations Division Standard

**TRAFFIC CONTROL PLAN**  
**MOBILE OPERATIONS**  
**RAISED PAVEMENT**  
**MARKER INSTALLATION/**  
**REMOVAL**  
**TCP (3-3) - 14**

FILE: tcp3-3.dgn	DWG: TxDOT	CHK: TxDOT	REV: TxDOT	CR: TxDOT
© TxDOT September 1987	CONT	SECT	JOB	HIGHWAY
REVISIONS	0156 12		020	SS 447
2-94 4-98				
8-95 7-13				
1-97 7-14	WFS		WICHITA	SHEET NO. 33




















DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

## WORK ZONE SHORT TERM PAVEMENT MARKINGS DETAILS

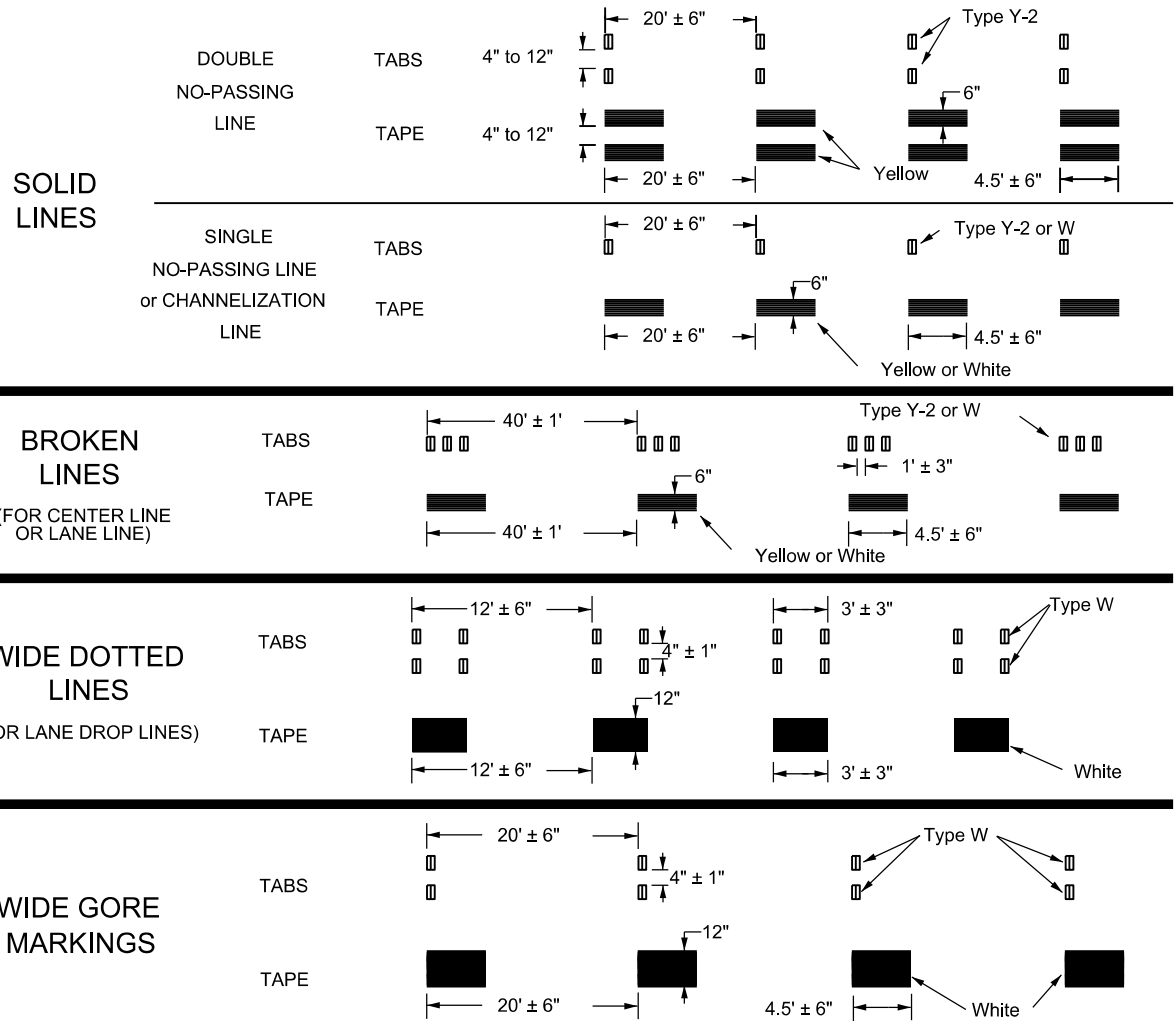



### NOTES:

- Short term pavement markings may be prefabricated markings (stick down tape) or temporary flexible reflective roadway marker tabs unless otherwise specified elsewhere in plans.
- Short term pavement markings shall NOT be used to simulate edge lines.
- Dimensions indicated on this sheet are typical and approximate. Variations in size and height may occur between markers or devices made by manufacturers, by as much as 1/4 inch, unless otherwise noted.
- Temporary flexible-reflective roadway marker tabs will require normal maintenance replacement when used on roadways with an ADT per lane of up to 7500 vehicles with no more than 10% truck mix. When roadways exceed these values, additional maintenance replacement of devices should be planned.
- No segment of roadway open to traffic shall remain without permanent pavement markings for a period greater than 14 calendar days. The Contractor will be responsible for maintaining short term pavement markings until permanent pavement markings are in place. When the Contractor is responsible for placement of permanent pavement markings, no segment of roadway shall remain without permanent pavement markings for a period greater than 14 calendar days unless weather conditions prohibit placement. Permanent pavement markings shall be placed as soon as weather permits.
- For two lane, two-way roadways, DO NOT PASS signs shall be erected to mark the beginning of sections where passing is prohibited and PASS WITH CARE signs shall be erected to mark the beginning of sections where passing is permitted. Signs shall be in accordance with the "Texas Manual on Uniform Traffic Control Devices" (TMUTCD) and may be used to indicate the limits of no-passing zones for up to 14 calendar days. Permanent pavement markings should then be placed.
- For low volume two lane, two-way roadways of 4000 ADT or less, no-passing lines may be omitted when approved by the Engineer. DO NOT PASS and PASS WITH CARE signs shall be erected (see note 6).
- For exit gores where a lane is being dropped place wide gore markings or retroreflective channelizing devices to guide motorist through the exit. If channelizing devices are to be used it should be noted elsewhere in the plans. One piece cones are not allowed for this purpose.

### TEMPORARY FLEXIBLE, REFLECTIVE ROADWAY MARKER TABS (TABS)

- Temporary flexible-reflective roadway marker tabs detailed on this sheet will be designated Type Y-2 (two amber reflective surfaces with yellow body); Type Y (one amber reflective surface with yellow body); and Type W (one white or silver reflective surface with white body). Additional details may be found on BC(11).
- Tabs shall meet requirements of Departmental Material Specification DMS-8242.
- When dry, tabs shall be visible for a minimum distance of 200 feet during normal daylight hours and when illuminated by automobile low-beam head light at night, unless sight distance is restricted by roadway geometrics.
- No two consecutive tabs nor four tabs per 1000 feet of line shall be missing or fail to meet the visual performance requirements of Note 3.

## WORK ZONE SHORT TERM PAVEMENT MARKINGS PATTERNS

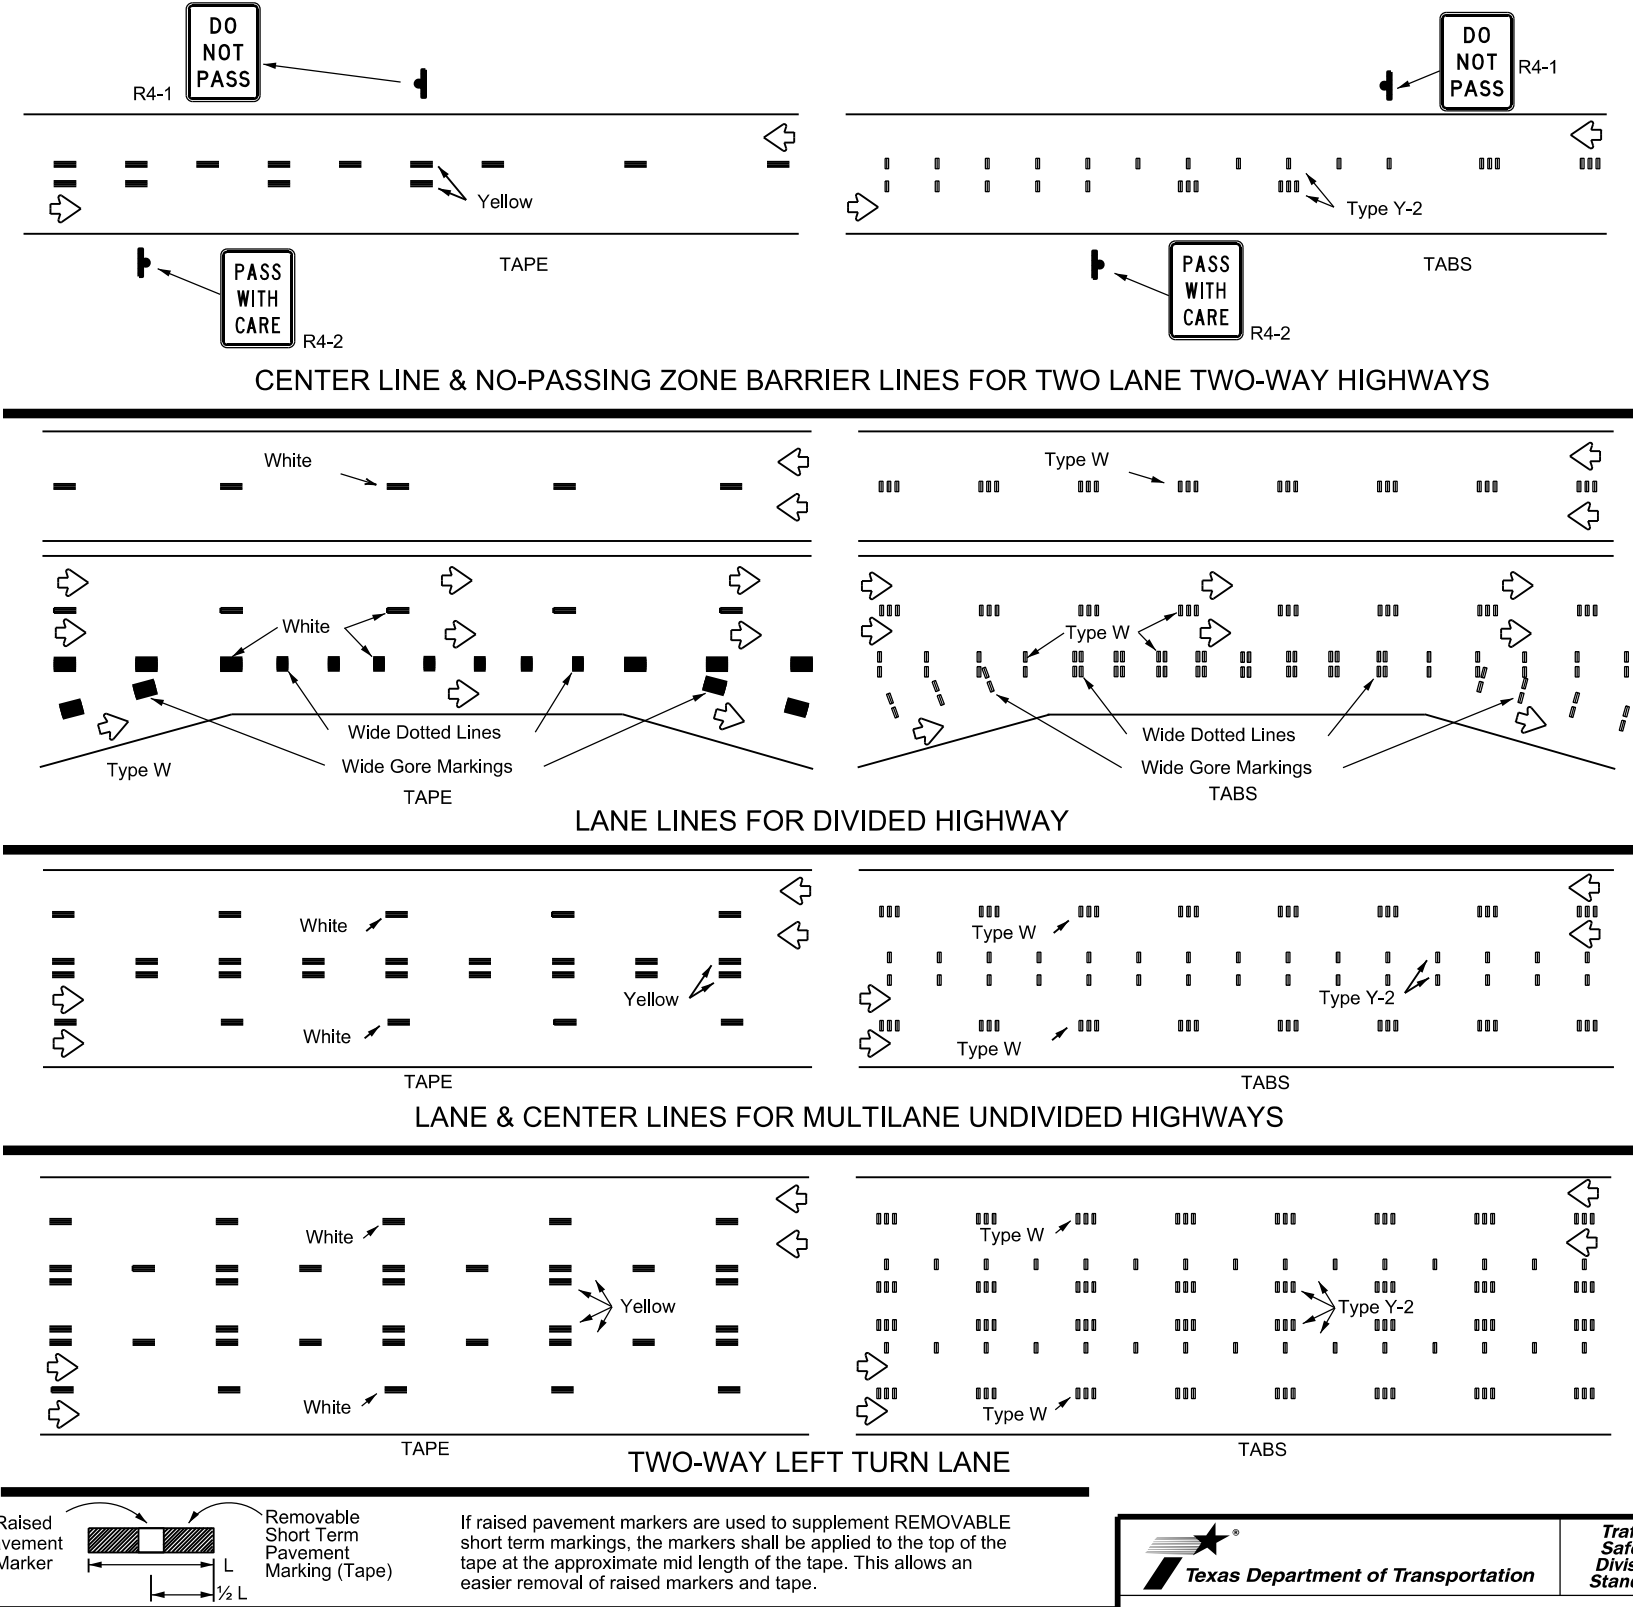

If raised pavement markers are used to supplement REMOVABLE short term markings, the markers shall be applied to the top of the tape at the approximate mid length of the tape. This allows an easier removal of raised markers and tape.

### PREFABRICATED PAVEMENT MARKINGS

- Temporary Removable Prefabricated Pavement Markings shall meet the requirements of DMS-8241.
- Non-removable Prefabricated Pavement Markings shall meet the requirements of either DMS-8240 "Permanent Prefabricated Pavement Markings" or DMS-8243 "Temporary Construction-Grade Prefabricated Pavement Markings."

### RAISED PAVEMENT MARKERS

- All raised pavement markers used for work zone markings shall meet the requirements of Item 672, "RAISED PAVEMENT MARKERS" and DMS-4200.

### DEPARTMENTAL MATERIAL SPECIFICATIONS (DMS) & MATERIAL PRODUCER LISTS (MPL)

- DMSs referenced above can be found along with embedded links to their respective MPLs at the following website:

[http://www.txdot.gov/business/contractors\\_consultants/material\\_specifications/default.htm](http://www.txdot.gov/business/contractors_consultants/material_specifications/default.htm)



## WORK ZONE SHORT TERM PAVEMENT MARKINGS

### WZ(STPM)-23

FILE: wzsstpm-23.dgn	DWG: 0156	SECT: 12	JOB: 020	HIGHWAY: SS 447
© TxDOT February 2023	REV: 1-87	REV: 2-23	DIST: WFS	COUNTY: WICHITA
4-92	7-13			SHEET NO. 42
1-87	2-23			
3-03				

DATE: \$DATES\$ FILE: \$FILES\$




DN: CK: DW: CK:

DATE: 3/23/2024 08:24:40 AM  
 FILE: pw://txdot.projectwiseonline.com:TXDOT/Projects/015612020/4 - Design/Master Design Files/Sheet Boundary Container/SS 447 PLAN LAYOUT.dgn



MATCHLINE SB STA. 544+00.00

MATCHLINE NB STA. 544+55.67



*Bryson Lawrence, P.E.*  
 03/26/2024





**SS 447**  
**PLAN LAYOUT**

© TXDOT 2024		SHEET 1 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	44	

CK: DW: CK: DN:

DATE: 3/27/2024 04:02:19 AM  
 FILE: p:\C\CLM\PROJECTS\SS 447\SS 447 PLAN LAYOUT.dgn

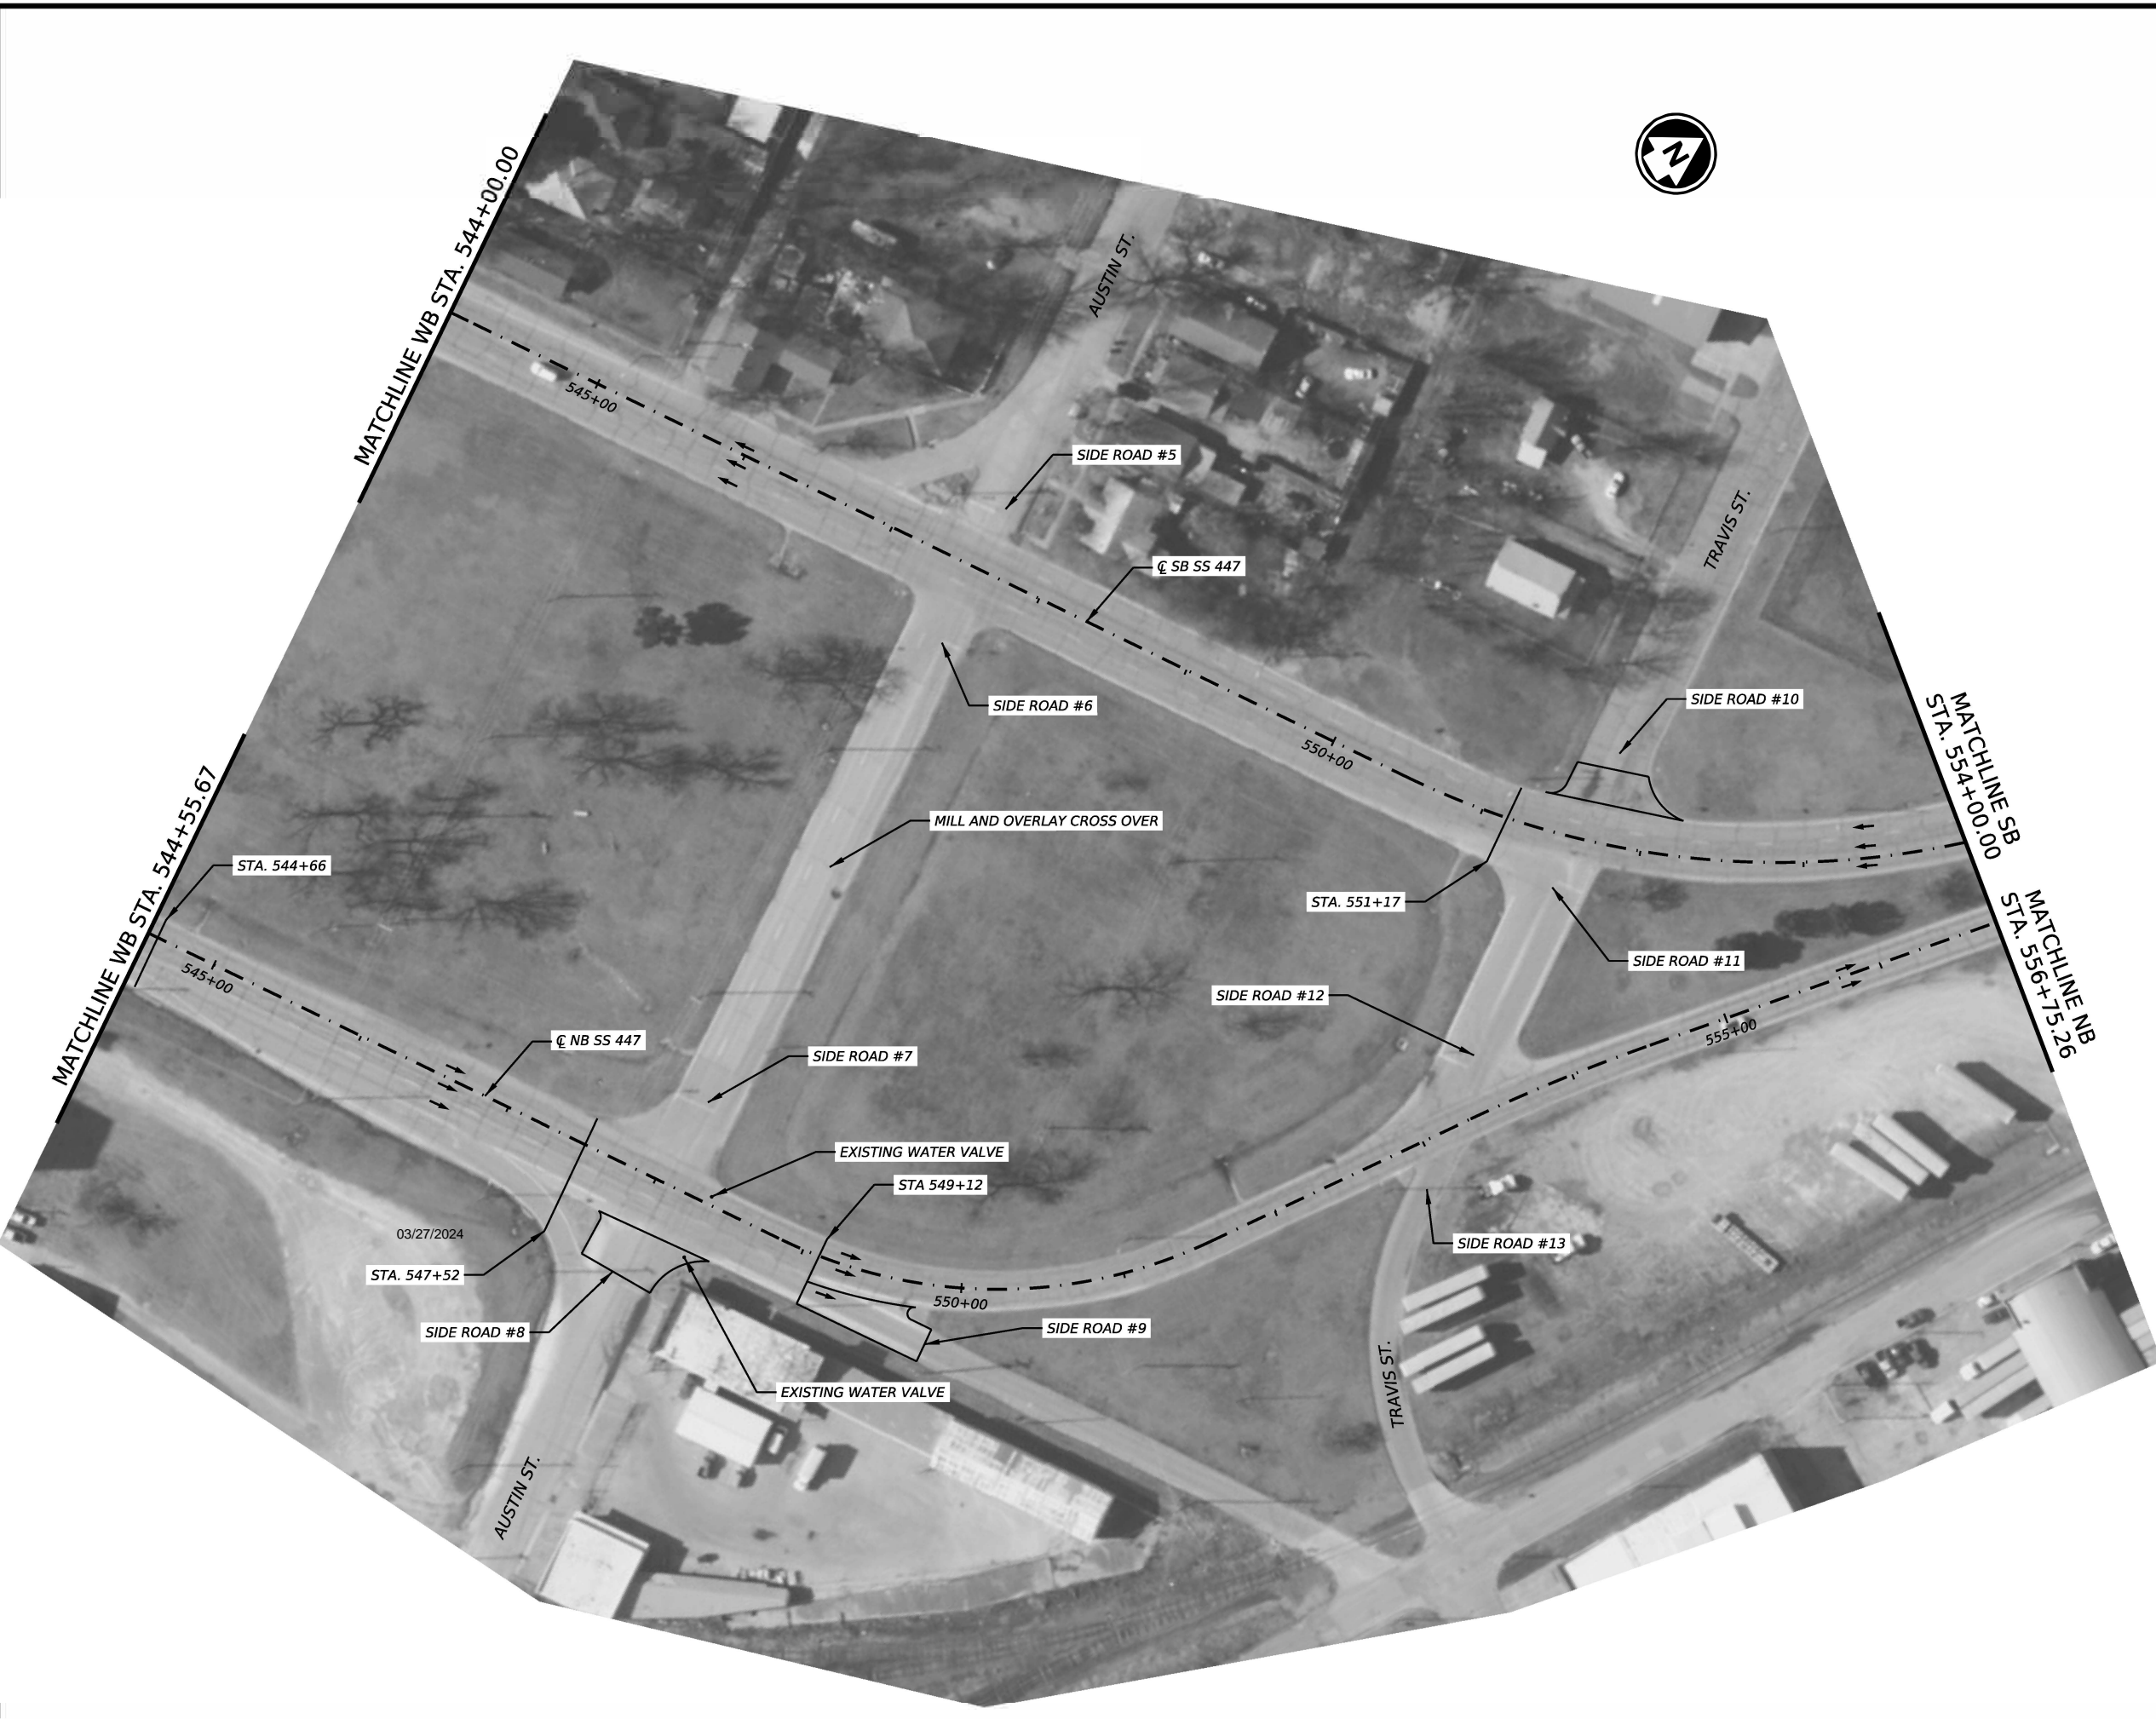

*Bryson Lawrence, P.E.*

**Texas Department of Transportation**

**SS 447**  
**PLAN LAYOUT**

© TxDOT 2024		SHEET 2 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	45	













DATE: 3/23/2024 1:03:28 PM  
 FILE: p:\C\CL\BENTON\WIS\online.com:TXDOT\Documents\03 - WFS\Design Projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 PLAN LAYOUT.dgn


DN: DW: CK: CK:

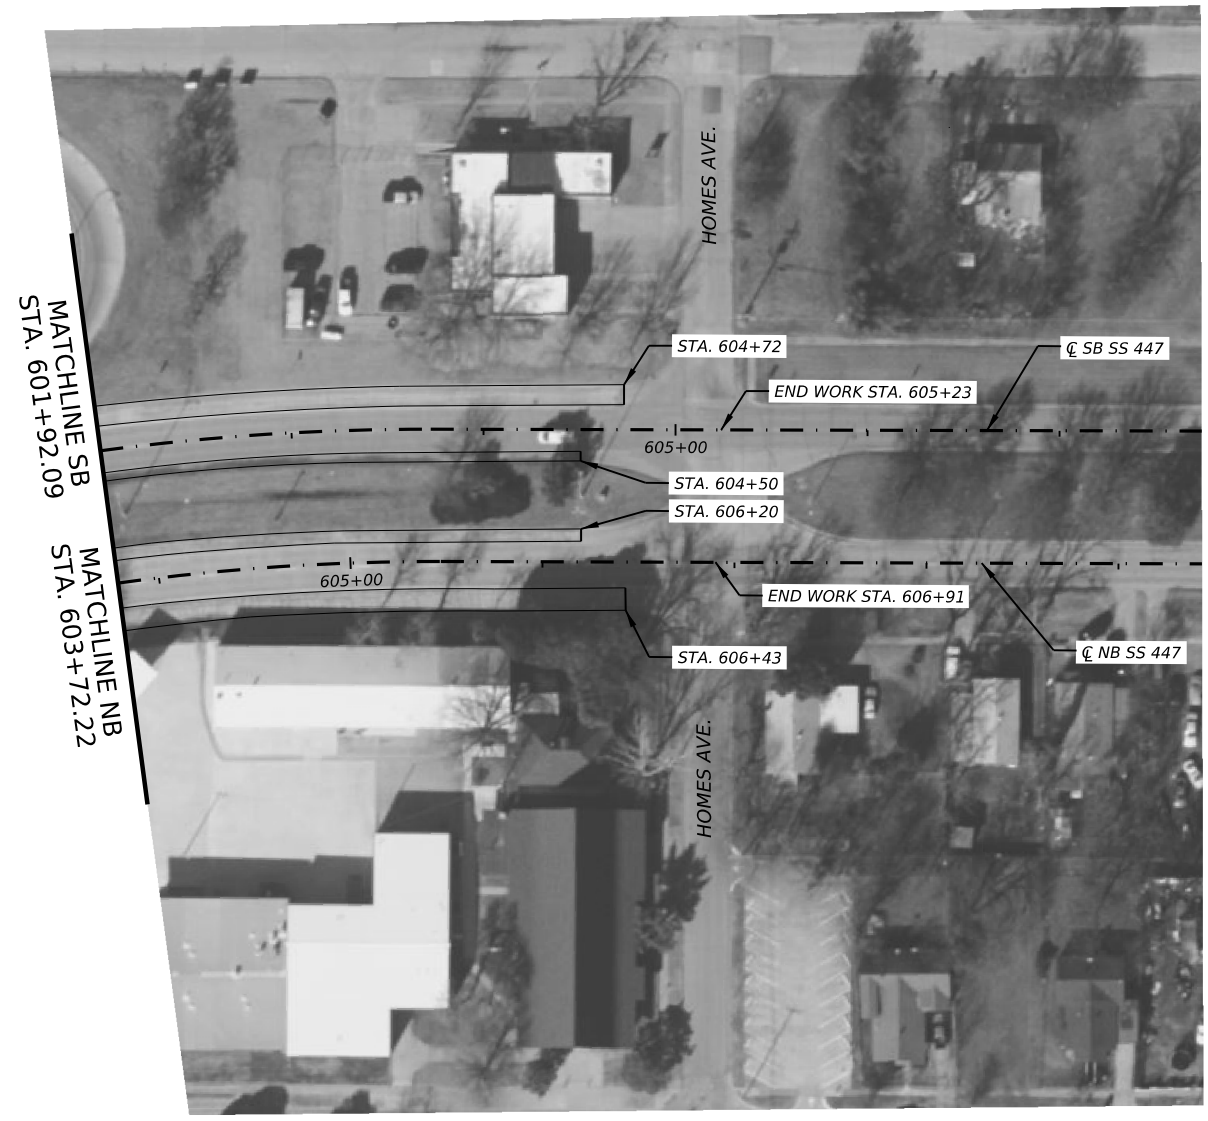

*Bryson Lawrence, P.E.*  
 03/26/2024

<b>SS 447</b> <b>PLAN LAYOUT</b>			
© TxDOT 2024		SHEET 7 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	50	


DATE: 3/21/2024 6:36:11 PM  
 FILE: pw://txdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/3. Roadway/PLANING DETAIL.dgn

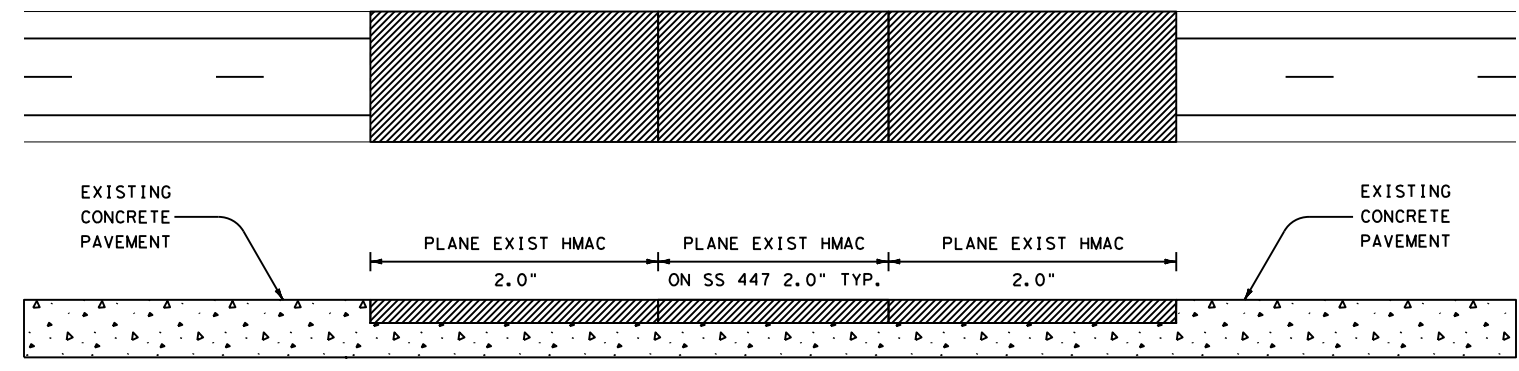


TYPICAL PLANING & OVERLAY<sup>①</sup>  
 @ BEGIN AND END OF PROJECT  
 (BUTT JOINTS)

NOTES:

- ① THIS DETAIL SHALL BE USED FOR CONSTRUCTING BUTT-JOINTS AT EACH END OF CONCRETE SEGMENTS (SEE TYPICAL), AND AT ALL BEGINNING/ENDING OF ALL PROJECT LOCATIONS USING ITEM 354-6004.
- ② THIS DETAIL SHALL BE USED FOR PLANING ON SIDE ROADS AND AT INTERSECTIONS.

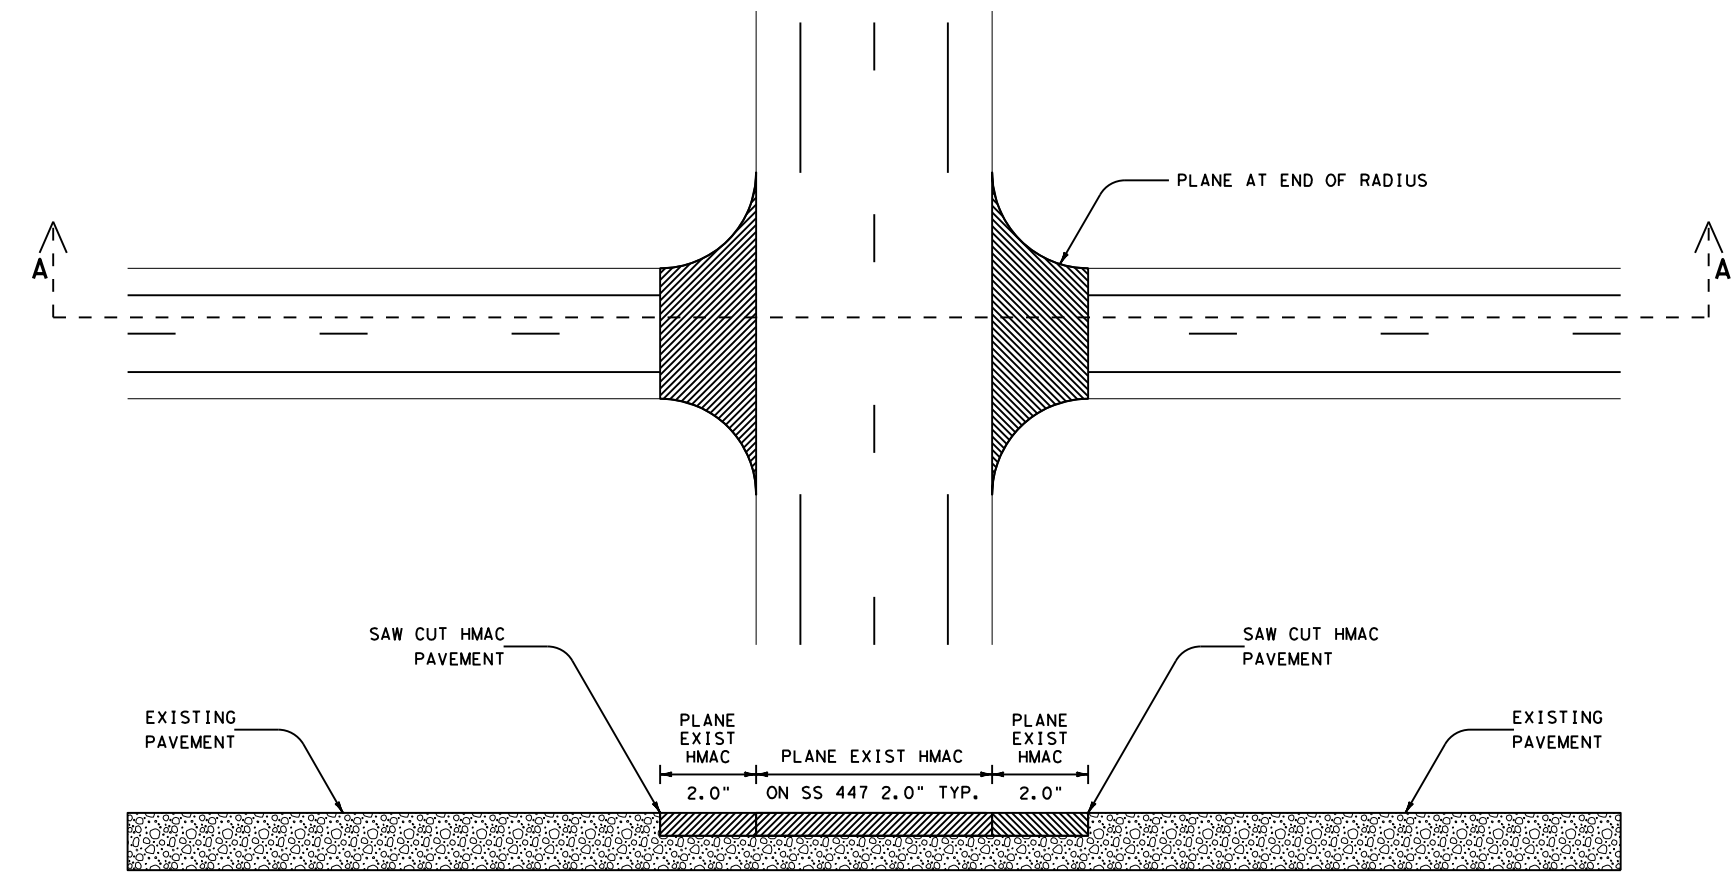

SECTION A-A  
 TYPICAL PLANING & OVERLAY<sup>②</sup>  
 @ INTERSECTIONS




Bryson Lawrence, P.E.  
 03/26/2024

**SS 447**  
**PLANING DETAIL**

NOT TO SCALE  
 © 2024  
 Texas Department of Transportation  
 SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	51	

DATE: 10/31/2023 5:50:26 PM  
 FILE: pw://txdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/3. Roadway/HOT MIX LONGITUDINAL JOINT @DETAIL.dgn

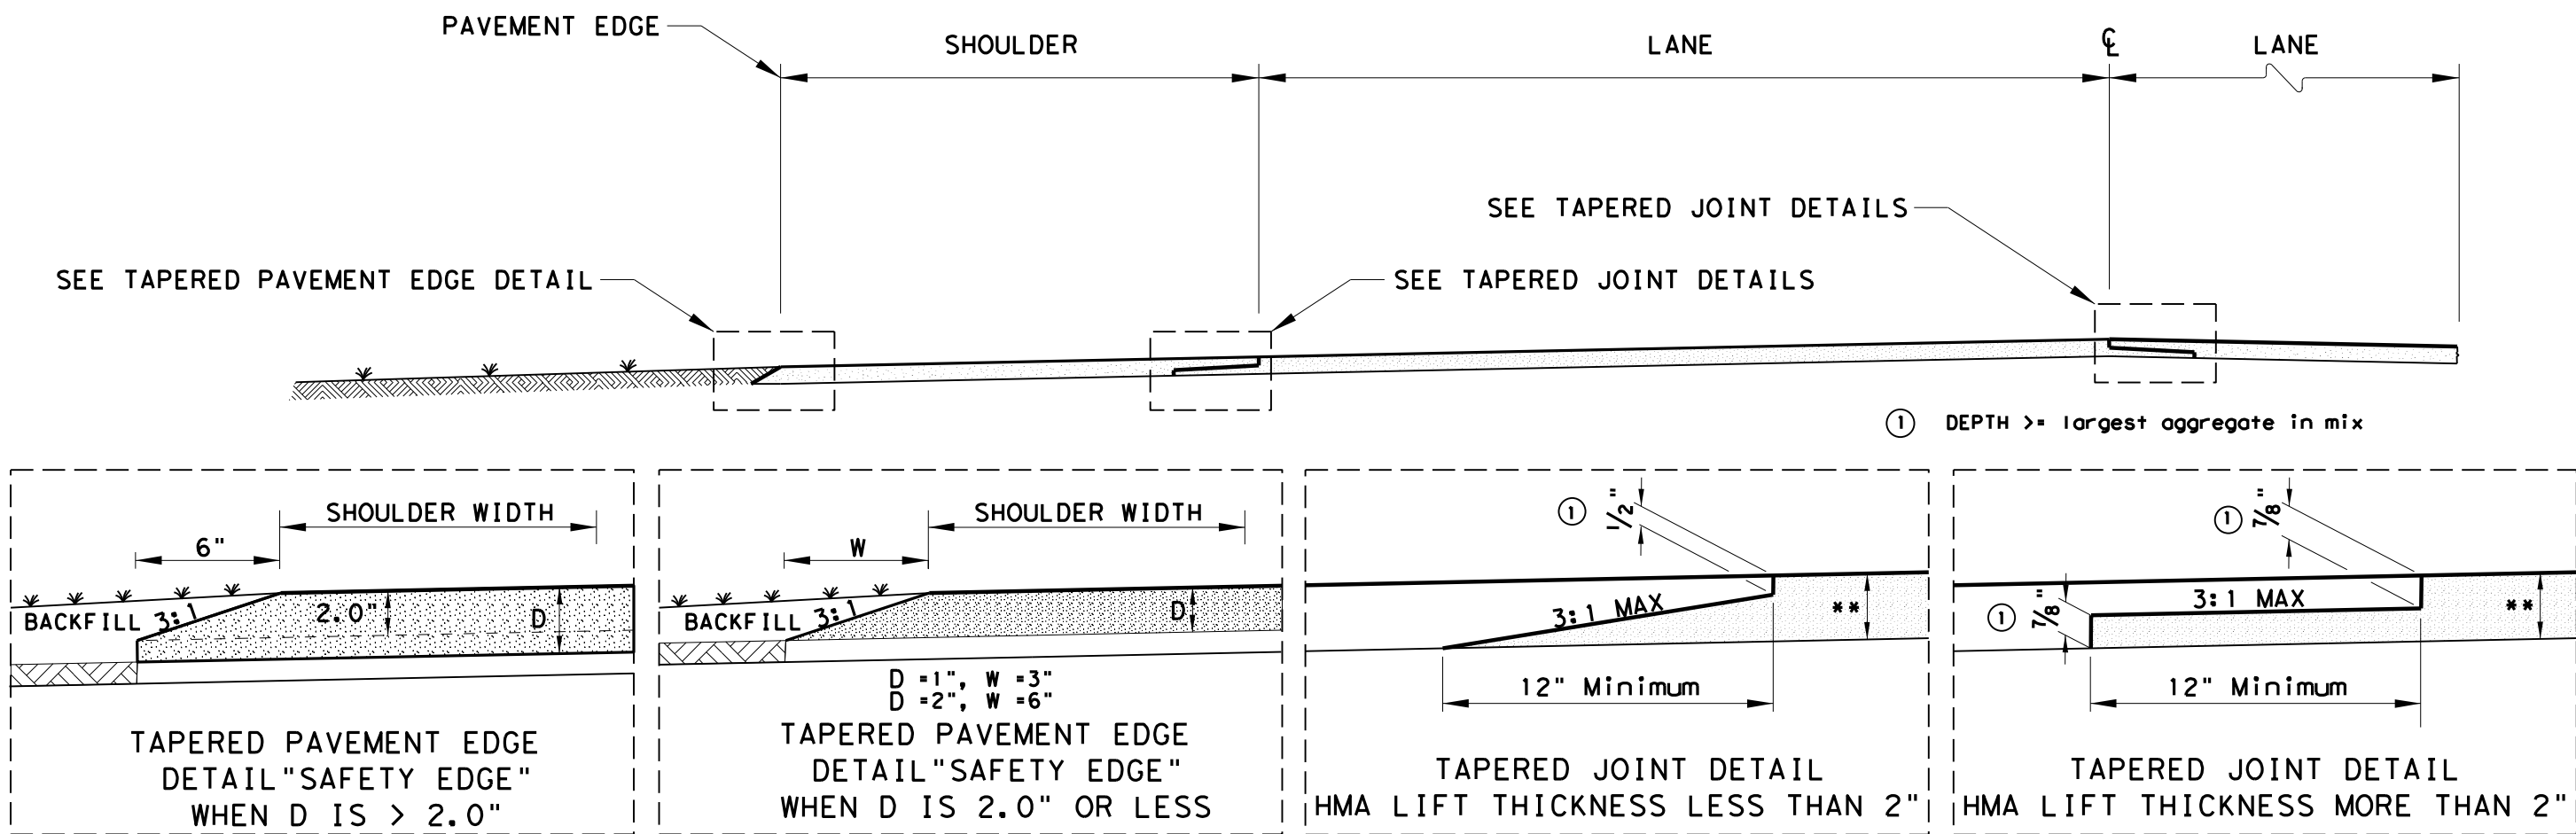

\*\* SEE TYPICAL SECTION FOR DEPTH AND TYPE OF HMA.

**NOTES:**

LONGITUDINAL JOINTS SHALL BE CONSTRUCTED BY TAPERING THE BITUMINOUS MAT. THE TAPERED PORTION SHALL EXTEND BEYOND THE NORMAL LANE WIDTH. THE TAPERED PORTION OF THE MAT SHALL BE CONSTRUCTED BY THE USE OF AN APPROVED SCREED ATTACHMENT WHICH WILL PRODUCE THE DESIRED SHAPE WITH THE MAIN SCREED. USE OF AN EXTERNAL STRIKE-OFF DEVICE TO MODIFY THE MAT SHAPE AFTER PASSING OF THE SCREED WILL NOT BE ALLOWED. TACK COAT SHALL BE APPLIED TO THE IN-PLACE TAPER BEFORE THE ADJACENT MAT IS PLACED. FINAL DENSITY REQUIREMENTS FOR THE ENTIRE PAVEMENT, INCLUDING THE TAPER AREA, WILL REMAIN UNCHANGED.

PAVEMENT EDGES SHALL BE CONSTRUCTED BY TAPERING THE BITUMINOUS MAT. THE TAPERED PORTION SHALL BE PLACED WITHIN THE NORMAL LANE WIDTH UNLESS OTHERWISE SHOWN ON THE PLANS. THE TAPERED PORTION OF THE MAT SHALL BE CONSTRUCTED BY THE USE OF AN APPROVED SCREED ATTACHMENT WHICH WILL PRODUCE THE DESIRED SHAPE WITH THE MAIN SCREED. USE OF AN EXTERNAL STRIKE-OFF DEVICE TO MODIFY THE MAT SHAPE AFTER PASSING OF THE SCREED WILL NOT BE ALLOWED. COMPACTION OF THE PAVEMENT EDGE TAPER WILL BE REQUIRED TO AS NEAR TO FINAL DENSITY AS POSSIBLE.

BRYSON P. LAWRENCE  
 129839  
 LICENSED PROFESSIONAL ENGINEER

*Bryson Lawrence, P.E.*

03/26/2024

**HOT MIX LONGITUDINAL JOINT DETAIL**


Texas Department of Transportation  
 SHEET 1 OF 1

CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY		SHEET NO.
WFS	WICHITA		52



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

### DEFINITION OF TREATMENT ZONES FOR VARIOUS EDGE CONDITIONS


Edge Height (D) in Inches versus Lateral Clearance (Y) in Feet

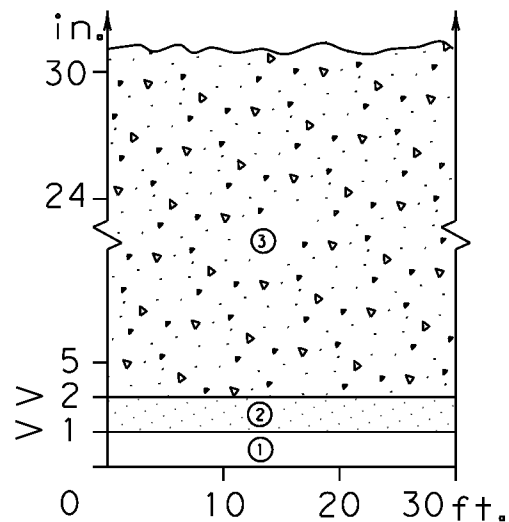

Edge Condition I  
S = (3:1) (or flatter)

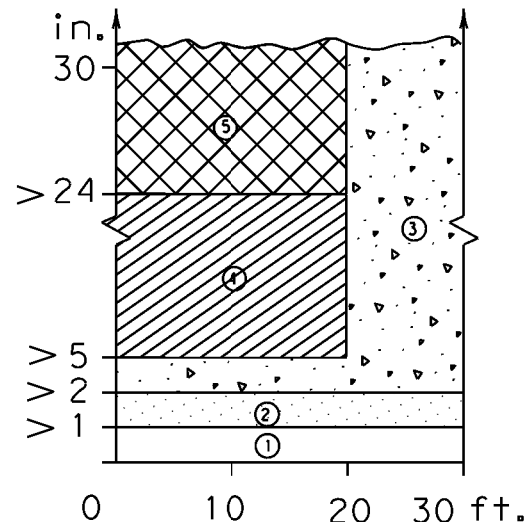

Edge Condition II  
S = ((2.99):1) to (1:1)

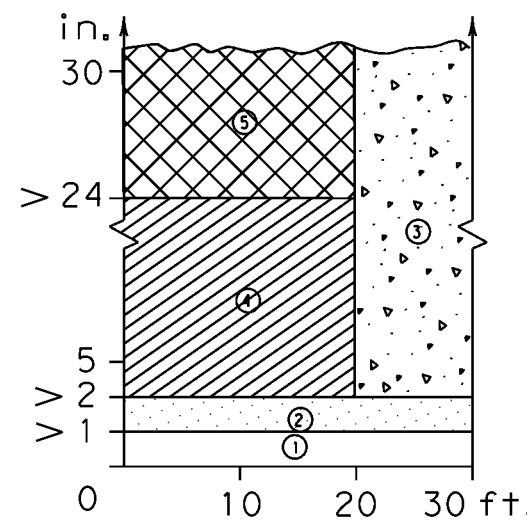

Edge Condition III  
S is steeper than (1:1)






FIGURE-1: CONDITIONS INDICATING USE OF POSITIVE BARRIER FOR ZONE 5 ( [Cross-hatched] )

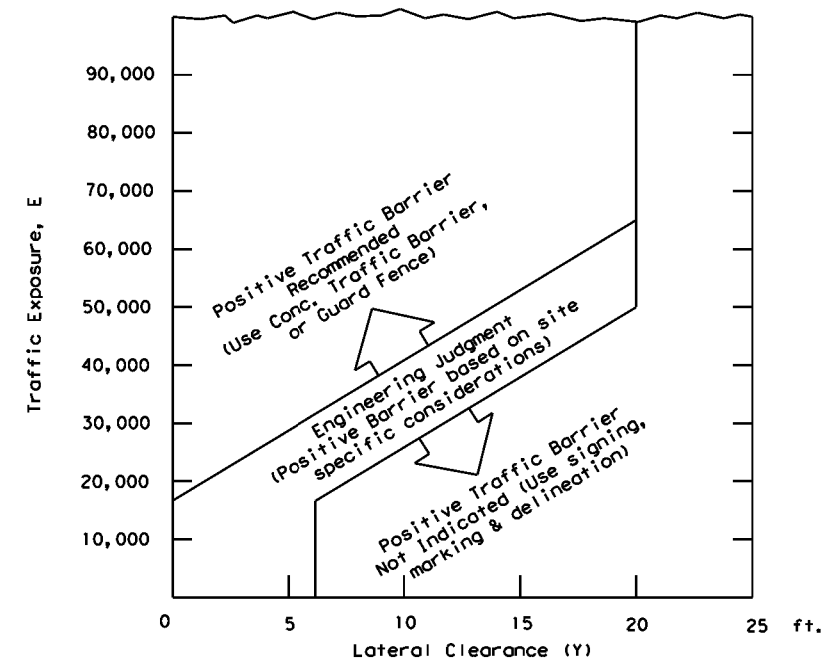

- E = ADT x T  
Where ADT is that portion of the average daily traffic volume traveling within 20 feet (generally two adjacent lanes) of the edge dropoff condition; and, T is the duration time in years of the dropoff condition.
- Figure-1 provides a practical approach to the use of positive barriers for the protection of vehicles from pavement drop-offs. Other factors, such as the presence of heavy machinery, construction workers, or the mix and volume of traffic may make the use of positive barriers appropriate, even when the edge condition alone may not justify the use of a barrier.
- An approved end treatment should be provided for any positive barrier end located within a lateral offset of 20 feet from the edge of the travel lane.

Warning Device or Traffic Barrier  
4" White Edge Line or Edge of Lanes being used for maintenance of traffic.

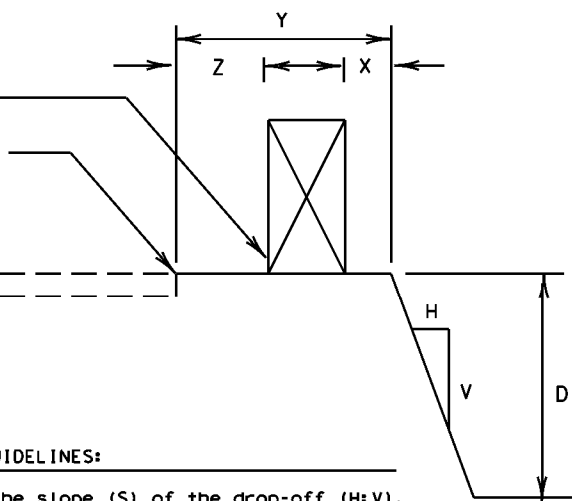

Zone	Treatment Types Guidelines:
①	No treatment.
②	CW 8-11 "Uneven Lanes" signs.
③	CW 8-9a "Shoulder Drop-Off" or CW 8-11 signs plus vertical panels.
④	CW 8-9a or CW 8-11, signs plus drums. Where restricted space precludes the use of drums, use vertical panels. An edge fill may be provided to change the edge slope to that of the preferable Edge Condition I.
⑤	Check indications (Figure-1) for positive barrier. Where positive barrier is not indicated, the treatment shown above for Zone- 4 may be used after consideration of other applicable factors.


**FACTORS CONSIDERED IN THE GUIDELINES:**

- The "Edge Condition" is the slope (S) of the drop-off (H:V). The "Edge Height" is the depth of the drop-off "D".
- Distance "X" is to be the maximum practical under job conditions. Two feet minimum for high speed conditions. Distance "Y" is the lateral clearance from edge of travel lane to edge of dropoff. Distance "Z" does not have a minimum.
- In addition to the factors considered in the guidelines, each construction zone drop-off situation should be analyzed individually, taking into account other variables, such as: traffic mix, posted speed in the construction zone, horizontal curvature, and the practicality of the treatment options.
- The conditions for indicating the use of positive or protective barriers are given by Zone-5 and Figure-1. Traffic barriers are primarily applicable for high speed conditions. Urban areas with speeds of 30 mph or less may have a lesser need for signing, delineation, and barriers. Right-angled edges, however, with "D" greater than 2 inches and located within a lateral offset of 6 feet, may indicate a higher level of treatment.
- If the distance "Y" must be less than 3 feet, the use of a positive barrier may not be feasible. In such a case, consider either: 1) narrowing the lanes to a desired 11 to 12 feet or 10 foot minimum (see CW20-8 sign), or 2) provide an edge slope such as Edge Condition I.

**Edge Condition Notes:**

- Edge Condition I: Most vehicles are able to traverse an edge condition with a slope rate of (3 to 1) or flatter. The slope must be constructed with a compacted material capable of supporting vehicles.
- Edge Condition II: Most vehicles are able to traverse an edge condition with a slope between (2.99 to 1) and (1 to 1) so long as "D" does not exceed 5 inches. Under-carriage drag on most automobiles will occur when "D" exceeds 6 inches. As "D" exceeds 24 inches, the possibility for rollover is greater in most vehicles.
- Edge Condition III: When slopes are greater than (1 to 1) and where "D" is greater than 2 inches, a more difficult control factor may exist for some vehicles, if not properly treated. For example, where "D" is greater than 2 inches and up to 24 inches different types of vehicles may experience different steering control at different edge heights. Automobiles might experience more steering control differential when "D" is greater than 2 inches and up to 5 inches. Trucks, particularly those with high loads, have more steering control differential when "D" is greater than 5 inches and up to 24 inches. When "D" exceeds 24 inches, the possibility of rollover is greater for most vehicles.
- Milling or overlay operations that result in Edge Condition III should not be in place without appropriate warning treatments, and these conditions should not be left in place for extended periods of time.

These guidelines apply to temporary traffic control areas or work zones where continuous pavement edges or drop-offs exists parallel and adjacent to a lane used by traffic. The edge conditions may be present between shoulders and travel lanes, between adjacent or opposing travel lanes, or at intermediate points across the width of the paved surface. Due to the variability in construction operations, tolerances in the variables may be allowed by the engineer. These guidelines do not apply to short term operations. These guidelines do not constitute a rigid standard or policy; rather, they are guidance to be used in conjunction with engineering judgement. These guidelines may be updated on the Design Division's on-line manuals.



Bryson Lawrence, P.E.  
03/26/2024




## TREATMENT FOR VARIOUS EDGE CONDITIONS

© TxDOT August 2000		DNR TxDOT	CR: TxDOT	DNR TxDOT	CR: TxDOT
REVISIONS					
CONT	SECT	JOB		HIGHWAY	
0156	12	020		SS 447	
DIST		COUNTY		SHEET NO.	
WFS		WICHITA		53	



DATE:  
FILE:

DATE: 3/21/2024 6:25:50 PM  
 FILE: D:\txdot\projectwiseonline.com\TXDOT\2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\EMBANKMENT DETAIL.dgn

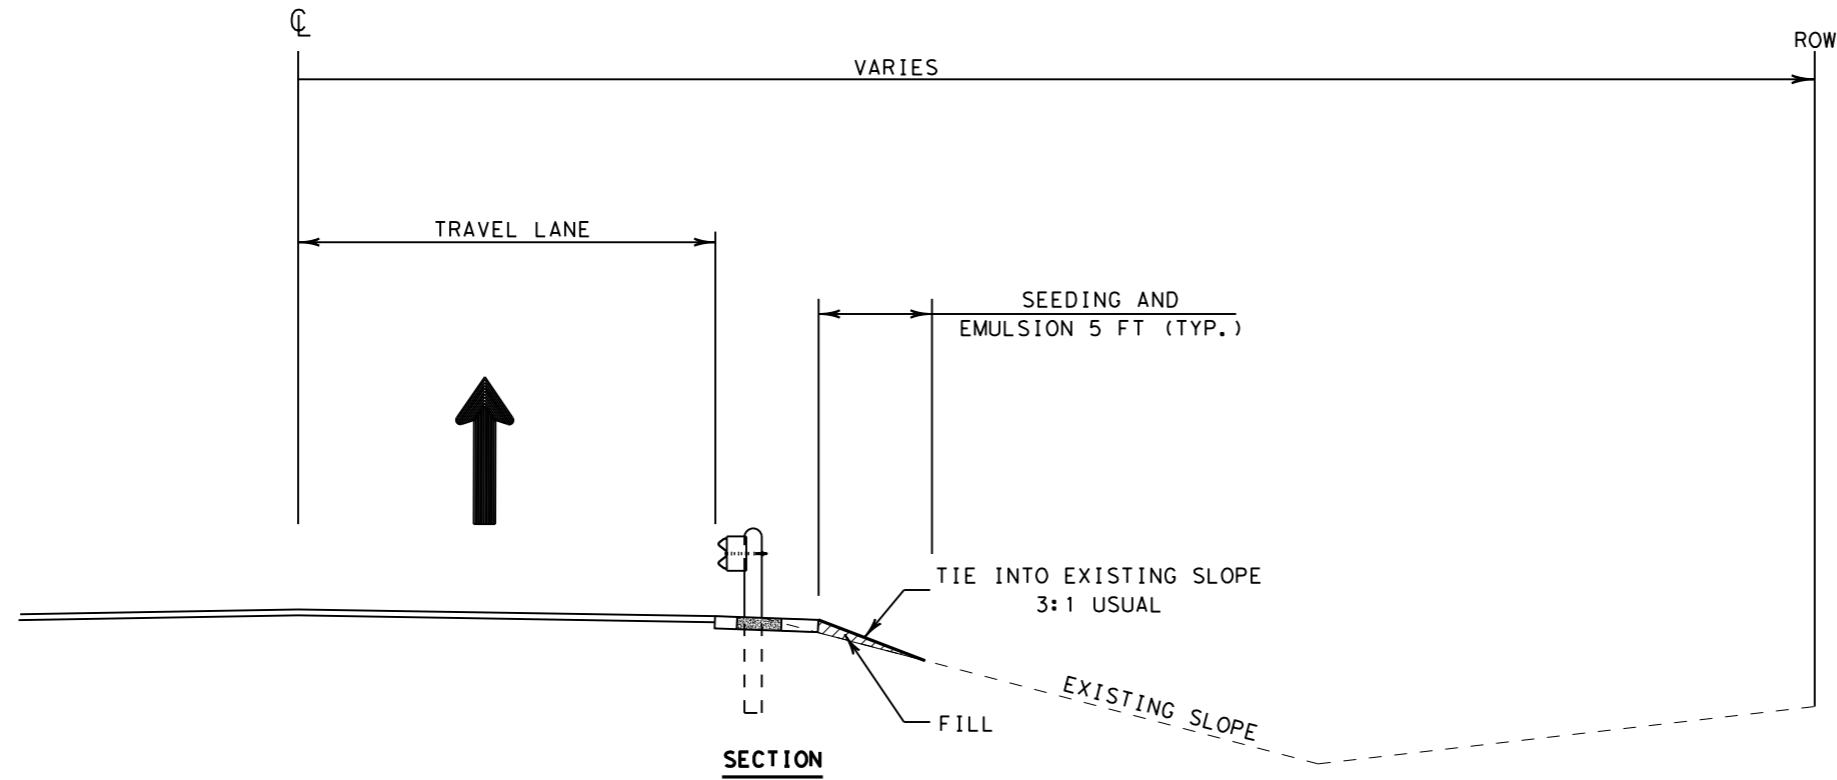


NOTES:

1. MATERIAL MUST BE APPROVED BY THE ENGINEER BEFORE CONSTRUCTION BEGINS.
2. COMPLETE ALL EMBANKMENT WORK PRIOR TO PLACEMENT OF PROPOSED MBGF AND SGT.
3. SEE GF (31)MS-19 FOR DETAILS NOT SHOWN.
4. EMBANKMENT SHALL BE SUBSIDIARY TO ITEM 432 RIPRAP MOWSTRIP.
5. AREAS WHERE EMBANKMENT IS ADDED MUST BE SEED, FERTILIZED, AND WATERED MEETING THE REQUIREMENTS HEREIN. THIS WORK WILL BE PAID FOR UNDER ITEMS 164 AND 168.

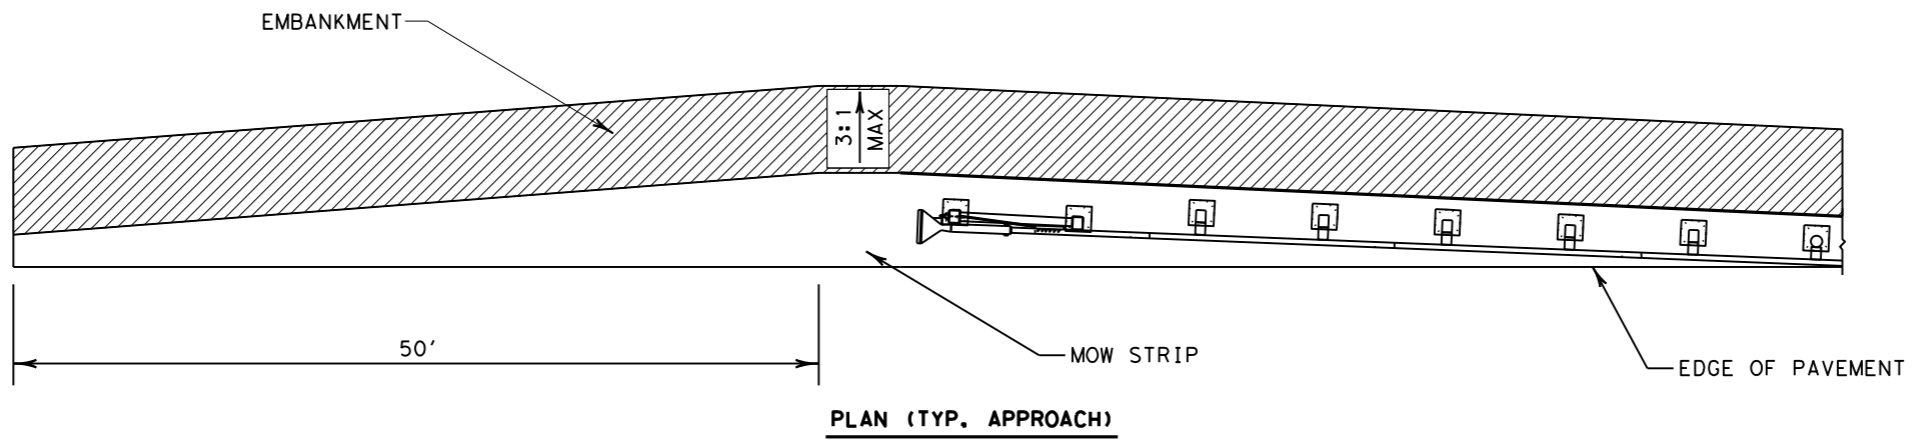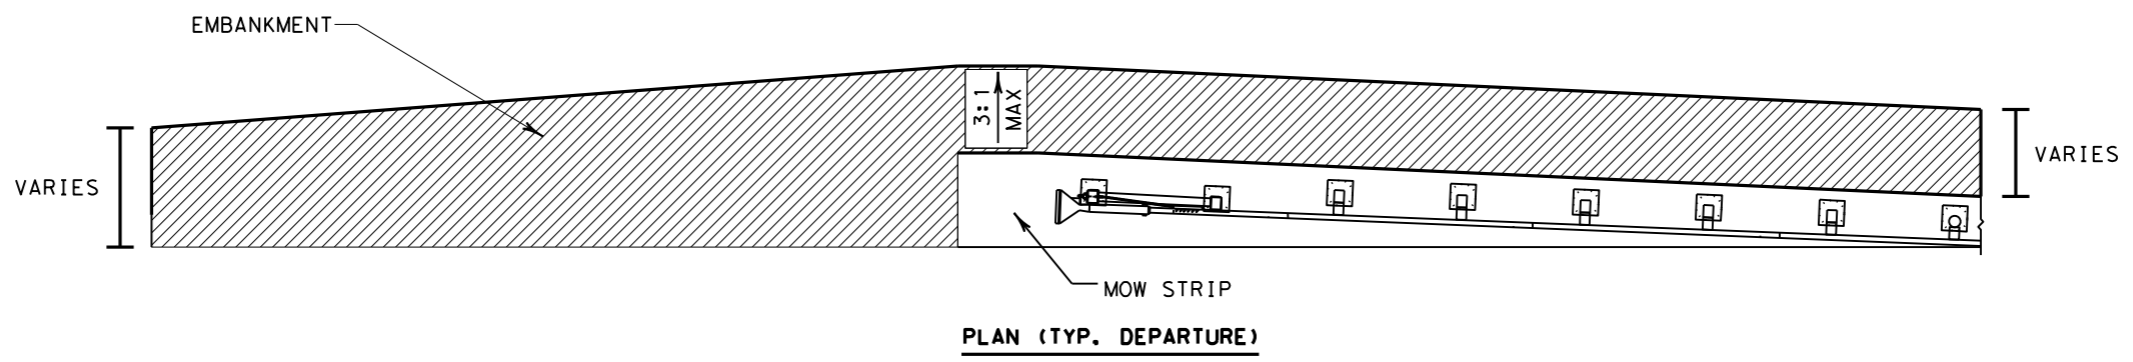

NOT TO SCALE



*Bryson Lawrence, P.E.*


03/26/2024

**SS 447  
 EMBANKMENT  
 DETAIL**




CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	54	

FILE: P:\w\project\wisconsin\line.com:TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\PAVEMENT REPAIR DETAIL.dgn  
 DATE: 3/21/2024 4:44:39 PM

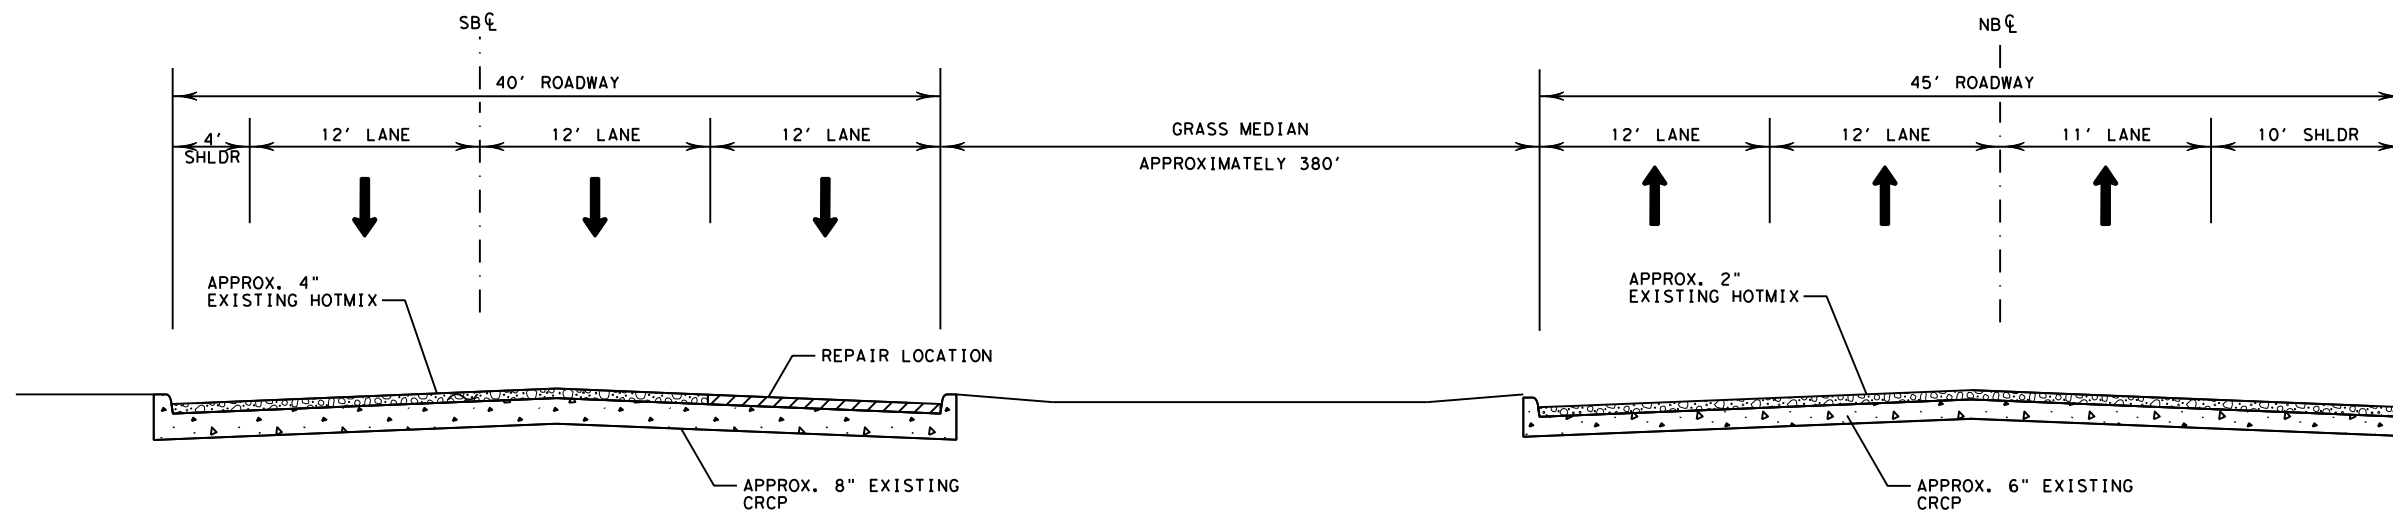


PROPOSED SOUTHBOUND TYPICAL SECTION

PROPOSED NORTHBOUND TYPICAL SECTION

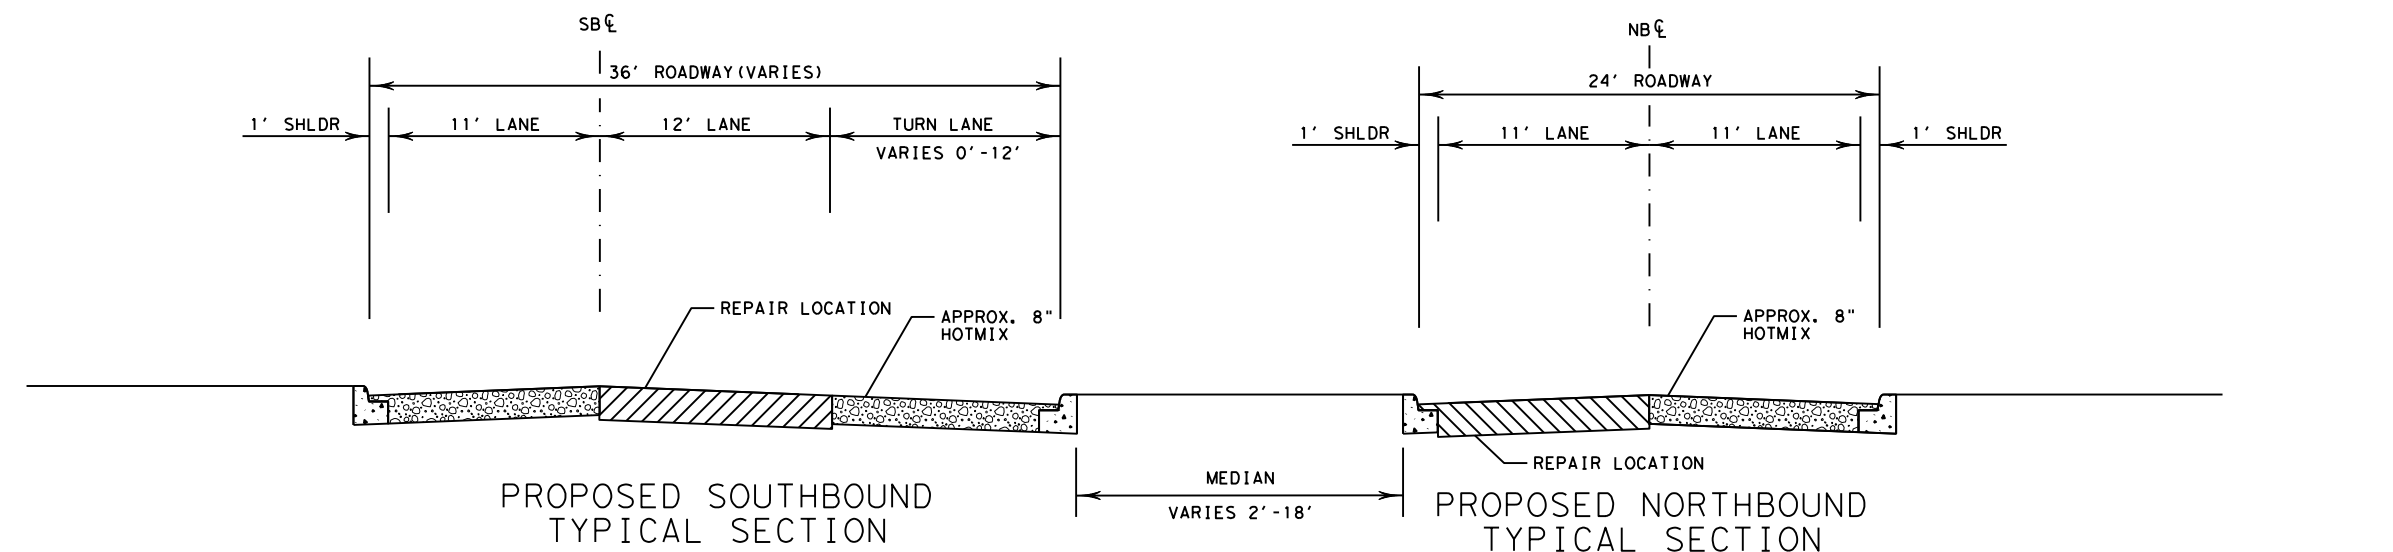

PROPOSED SOUTHBOUND TYPICAL SECTION

PROPOSED NORTHBOUND TYPICAL SECTION

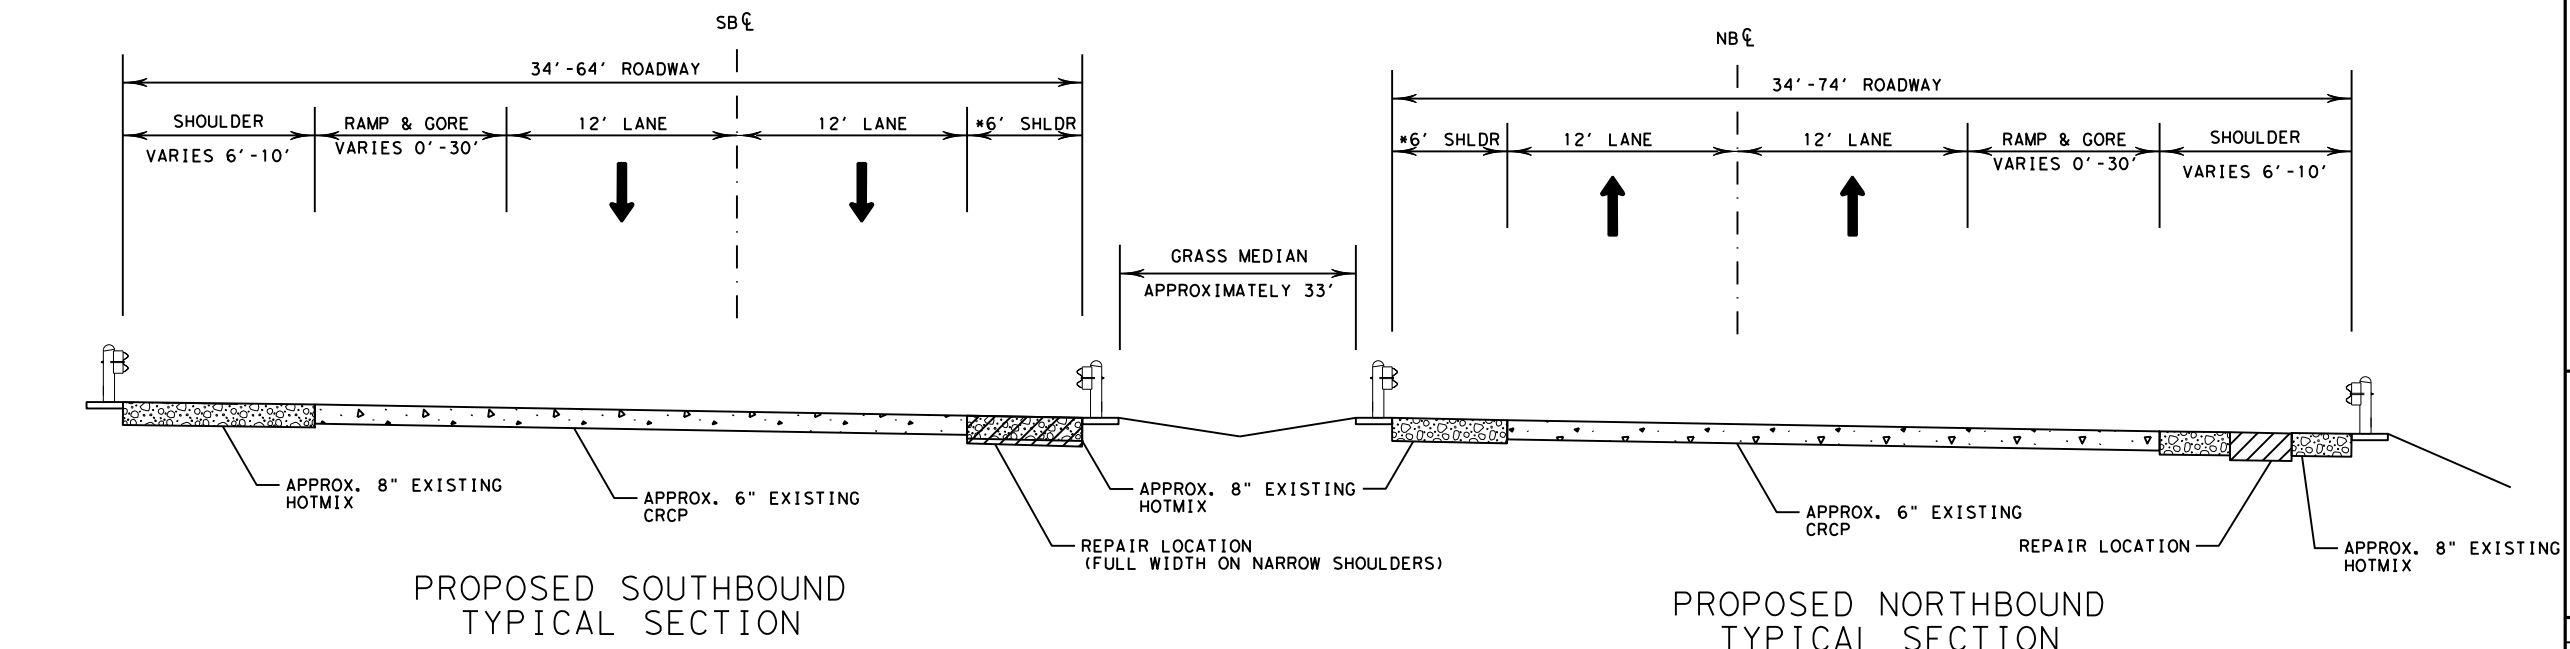

PROPOSED SOUTHBOUND TYPICAL SECTION

PROPOSED NORTHBOUND TYPICAL SECTION

NOTES:  
 PERFORM PAVEMENT REPAIR BEFORE HOTMIX OPERATIONS AND AFTER PLANING OPERATIONS.

MARK PROPOSED PAVEMENT REPAIR LOCATIONS FOR APPROVAL BY THE ENGINEER BEFORE THE WORK.


PAVEMENT THICKNESS MAY VARY. REMOVE THE ENTIRE HMAC LAYER WITHIN REPAIR LOCATION.

VERIFY SUBGRADE IS IN GOOD CONDITION AND IF NOT, REPAIR AS DIRECTED BY THE ENGINEER.

FOR THE SECTIONS THAT HMAC IS PLACED OVER CONCRETE, VERIFY THE CONDITION OF THE CONCRETE PAVEMENT. IF THE CONCRETE IS IN POOR CONDITION MARK OUT REPAIR AREA FOR APPROVAL BY THE ENGINEER AND REPAIR ACCORDING TO CONCRETE REPAIR DETAIL SHEET.

\*INSIDE SHOULDER NARROWS IN A FEW LOCATIONS. INSTALL NEW INSIDE SHOULDER HOTMIX AT 6FT WIDE.

NARROW HMAC LOCATIONS EXIST ON THIS PROJECT, PLAN EQUIPMENT AND WORK FOR MILLING LESS THAN 7FT WIDE AREAS.



Bryson Lawrence, P.E.

03/26/2024

FLEXIBLE PAVEMENT REPAIR DETAIL

N. T. S.  
 Texas Department of Transportation

SS 447


SHEET 1 OF 1

COUNT	SECT	JOB	HIGHWAY
0156	12	020	SP 447
DIST	COUNTY	SHEET NO.	
03	WICHITA	55	


DATE: 10/31/2023  
 FILE: \\txdot.projectwiseonline.com:TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\REPAIR OF CONCRETE PAVEMENT.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

TABLE NO.1 STEEL BAR SIZE AND SPACING						
TYPE PAVEMENT	SLAB THICKNESS AND BAR SIZE		LONGITUDINAL*		TRANSVERSE*	
	T (IN.)	BAR SIZE	REGULAR BARS	TIEBARS	BARS	TIEBARS
			SPACING (IN.)	SPACING (IN.)	SPACING (IN.)	SPACING (IN.)
CRCP	6.0	#5	7.5	7.5	24	24
	6.5		7.0	7.0		
	7.0		6.5	6.5		
	7.5		6.0	6.0		
	8.0	#6	9.0	9.0	24	24
	8.5		8.5	8.5		
	9.0		8.0	8.0		
	9.5		7.5	7.5		
	10.0		7.0	7.0		
	10.5		6.75	6.75		
11.0	6.5	6.5				
11.5	6.25	6.25				
≥12.0	6.0	6.0				
JRCP	<8.0	#5	24.0	12.0	24	24
	≥8.0	#6	24.0	12.0	24	24
CPCD	<8.0	#5	NONE	12.0	NONE	24
	≥8.0	#6	NONE	12.0	NONE	24

\* USE 12" SPACING AS FIRST AND LAST SPACING AT END OR SIDE FOR ALL BARS.

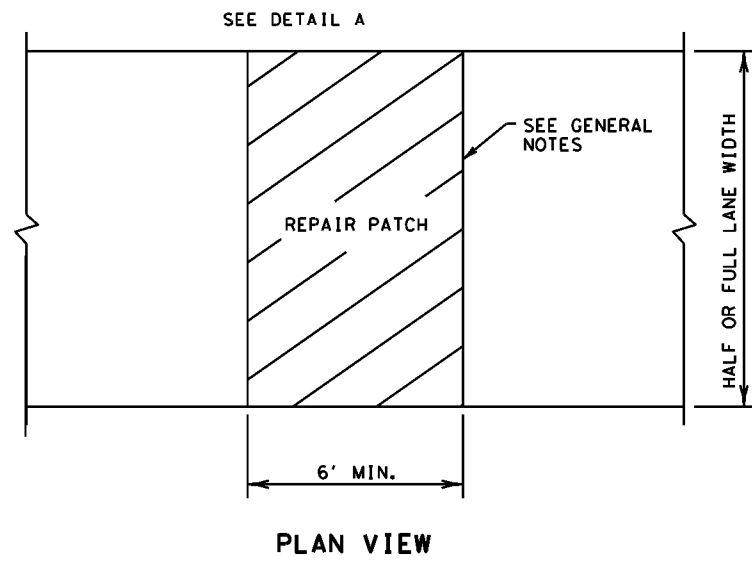


- ### GENERAL NOTES
- ITEM 361, "REPAIR OF CONCRETE PAVEMENT" SHALL GOVERN FOR THIS WORK.
  - MULTIPLE PIECE TIEBARS SHALL BE USED WHEN THE REPAIR AREA MUST BE PLACED IN TWO STAGES DUE TO SEQUENCE OF CONSTRUCTION.
  - FULL DEPTH SAW CUTS SHALL BE MADE AROUND THE PERIMETER OF THE AREA TO BE REPAIRED. THE CUT SHALL BE MADE AT A RIGHT ANGLE TO THE PAVEMENT EDGE AND TO THE CENTER LINE OF THE PAVEMENT.
  - AT LEAST ONE LONGITUDINAL FULL DEPTH SAW CUT SHALL BE AT AN EXISTING LONGITUDINAL JOINT.
  - ADDITIONAL SAW CUTS MAY BE REQUIRED WITHIN THE AREA OF THE REPAIR TO FACILITATE REMOVAL OF THE CONCRETE OR TO ALLEVIATE BINDING OF THE FULL DEPTH SAW CUT AT THE REPAIR EDGE.
  - THE SAW CUTS WHICH EXTEND OUTSIDE THE AREA OF THE REPAIR WILL BE CLEANED AND FILLED WITH A CEMENTITIOUS GROUT APPROVED BY THE ENGINEER.
  - EXISTING LONGITUDINAL AND TRANSVERSE JOINTS REMOVED DUE TO REPAIR OPERATION SHOULD BE RESTORED IN ACCORDANCE WITH STANDARD SHEET "CONCRETE PAVING DETAILS, JOINT SEALS."

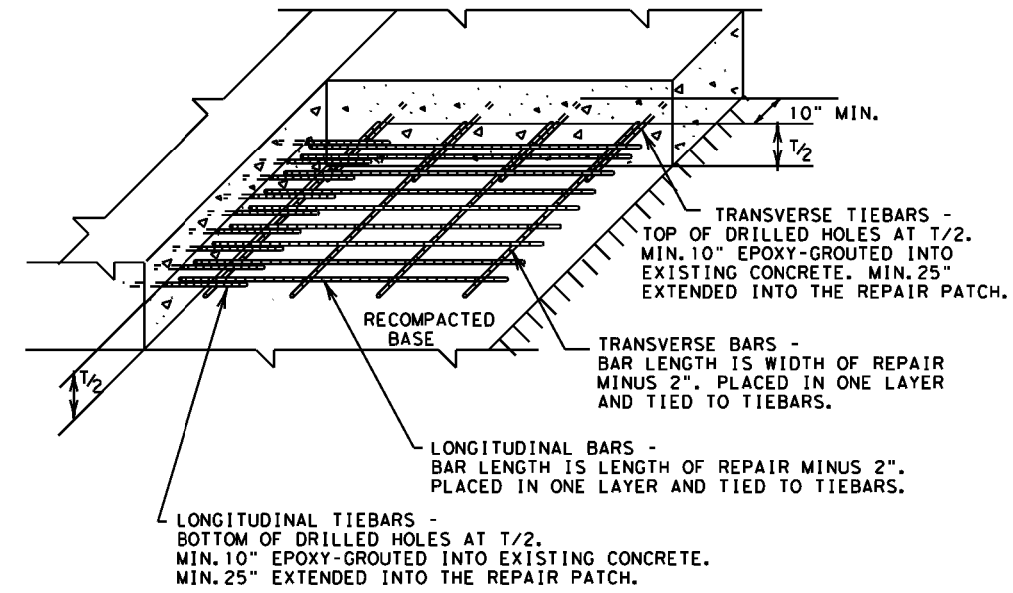


**DETAIL A  
GROUTED TIEBARS & REINFORCEMENT**

### FULL-DEPTH REPAIR OF CRCP, JRCP, AND CPCD

- ### GENERAL NOTES
- ITEM 361, "REPAIR OF CONCRETE PAVEMENT" SHALL GOVERN FOR THIS WORK.
  - THE SAW CUTS WHICH EXTEND OUTSIDE THE AREA OF THE REPAIR WILL BE CLEANED AND FILLED WITH A CEMENTITIOUS GROUT APPROVED BY THE ENGINEER.
  - EXISTING LONGITUDINAL AND TRANSVERSE JOINTS REMOVED DUE TO REPAIR OPERATION SHOULD BE RESTORED IN ACCORDANCE WITH STANDARD SHEET "CONCRETE PAVING DETAILS, JOINT SEALS."

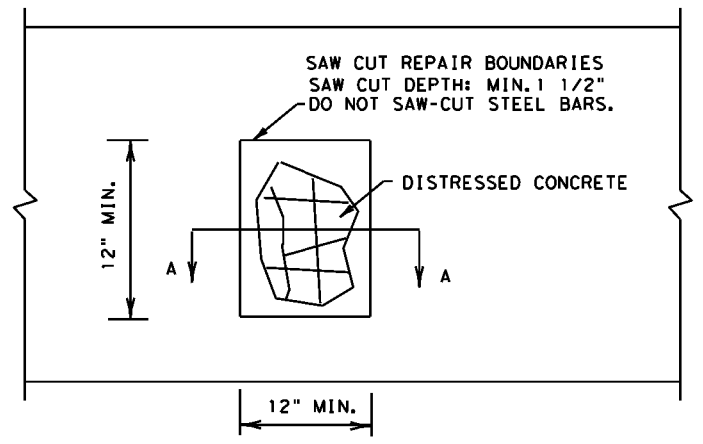

**PLAN VIEW**

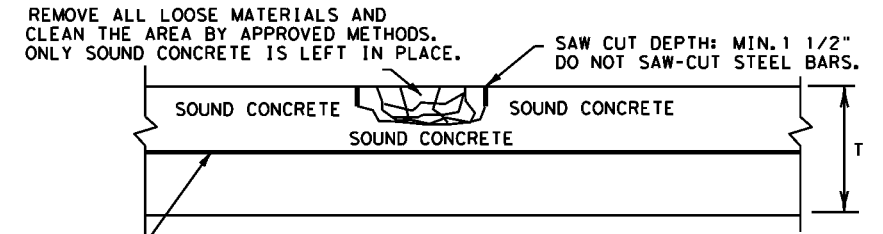

- LONGITUDINAL STEEL BARS:
- \*REPAIR AREAS MAY BE ADJUSTED AFTER REMOVING DISTRESSED CONCRETE. SWITCH THE HALF-DEPTH REPAIR TO FULL-DEPTH REPAIR IF EXPOSED EXISTING LONGITUDINAL BARS ARE DEFICIENT, AS APPROVED. COMPENSATION WILL BE MADE FOR UNEXPECTED VOLUMES OF REPAIR AREAS OR CHANGES IN SCOPE OF WORK.
  - \*INCREASE THE REPAIR AREA AND PERFORM A FULL-DEPTH REPAIR AS DIRECTED IF LONGITUDINAL STEEL BARS WERE DAMAGED BY THE REMOVAL OPERATIONS. NO ADDITIONAL COMPENSATION WILL BE MADE.



**SECTION A-A  
HALF-DEPTH REPAIR**

				Design Division Standard
REPAIR OF CONCRETE PAVEMENT				
REPCP-14				
FILE: repcp14.dgn	DNR TxDOT	DNR HC	DNR HC	CR: AN
© TxDOT: DECEMBER 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0156 12		020	SS 447
	DIST	COUNTY		SHEET NO.
	WFS	WICHITA		56



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 10/31/2023  
 FILE: \\txdot.projectwiseonline.com:TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\REPAIR OF CONCRETE PAVEMENT.dgn

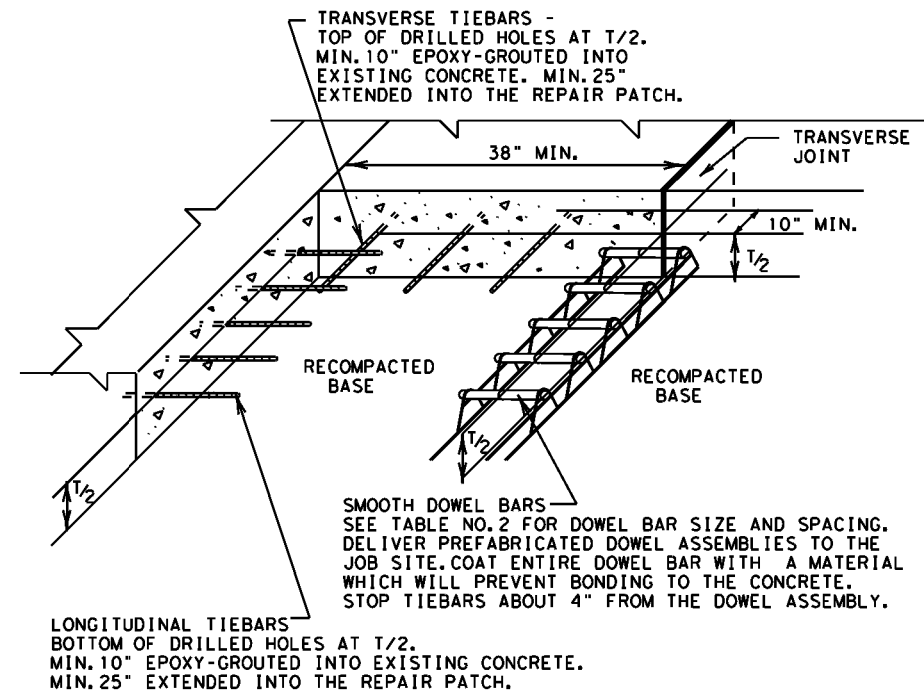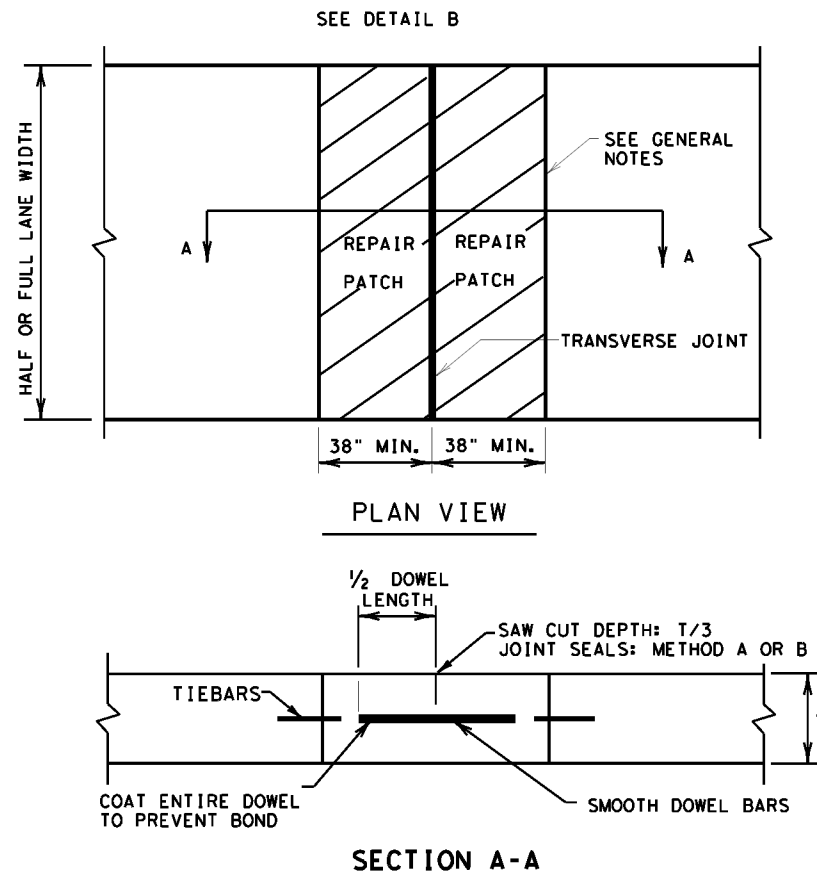

**DETAIL B**  
**GROUTED TIEBARS & DOWELS**

**REPAIR OF TRANSVERSE JOINT OF CPCD**

**GENERAL NOTES**

1. ITEM 361, "REPAIR OF CONCRETE PAVEMENT" SHALL GOVERN FOR THIS WORK.
2. MULTIPLE PIECE TIEBARS SHALL BE USED WHEN THE REPAIR AREA MUST BE PLACED IN TWO STAGES DUE TO SEQUENCE OF CONSTRUCTION.
3. FULL DEPTH SAW CUTS SHALL BE MADE AROUND THE PERIMETER OF THE AREA TO BE REPAIRED. THE CUT SHALL BE MADE AT A RIGHT ANGLE TO THE PAVEMENT EDGE AND TO THE CENTER LINE OF THE PAVEMENT.
4. AT LEAST ONE LONGITUDINAL FULL DEPTH SAW CUT SHALL BE AT AN EXISTING LONGITUDINAL JOINT.
5. ADDITIONAL SAW CUTS MAY BE REQUIRED WITHIN THE AREA OF THE REPAIR TO FACILITATE REMOVAL OF THE CONCRETE OR TO ALLEVIATE BINDING OF THE FULL DEPTH SAW CUT AT THE REPAIR EDGE.
6. THE SAW CUTS WHICH EXTEND OUTSIDE THE AREA OF THE REPAIR WILL BE CLEANED AND FILLED WITH A CEMENTITIOUS GROUT APPROVED BY THE ENGINEER.
7. EXISTING LONGITUDINAL AND TRANSVERSE JOINTS REMOVED DUE TO REPAIR OPERATION SHOULD BE RESTORED IN ACCORDANCE WITH STANDARD SHEET "CONCRETE PAVING DETAILS, JOINT SEALS."
8. DOWEL BAR PLACEMENT TOLERANCE SHALL BE +/- 1/4 IN. HORIZONTALLY AND VERTICALLY UNLESS OTHERWISE SPECIFIED. WHERE DOWEL BAR BASKETS ARE USED, REMOVE THE SHIPPING WIRES.

PAVEMENT THICKNESS (INCHES)	SIZE AND DIA.	LENGTH (IN.)	SPACING (IN.)
<10	#8 (1 IN.)	18.0	12.0
≥10	#10 (1 1/4 IN.)		

SHEET 2 OF 2




**REPAIR OF CONCRETE PAVEMENT**

**REPCP-14**


FILE: repcp14.dgn	DNR TxDOT	DNR HC	DNR HC	CR: AN
© TxDOT: DECEMBER 2014	CONT	SECT	JOB	HIGHWAY
REVISIONS	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		57	

DATE: 11/1/2023  
 FILE: pw://txdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/3. Roadway/CONCRETE PAVEMENT DETAILS, JOINT SEALS  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


METHOD B: JOINT SEALING COMPOUND

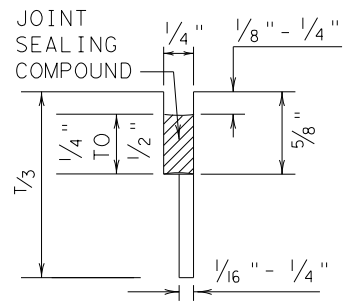


LONGITUDINAL SAWED CONTRACTION JOINT

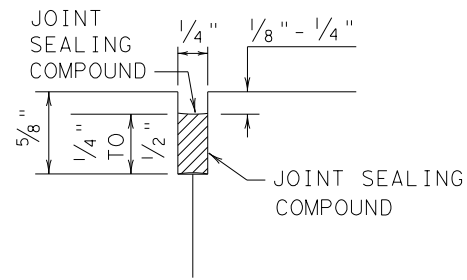


LONGITUDINAL OR TRANSVERSE CONSTRUCTION JOINT

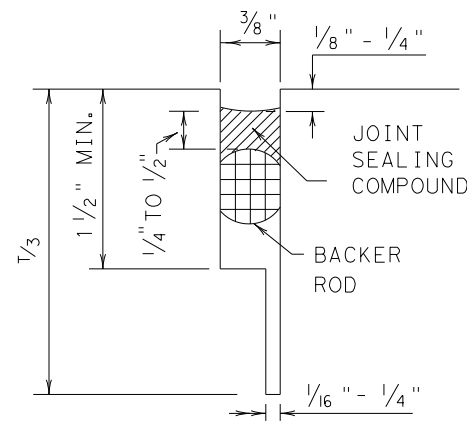

TRANSVERSE SAWED CONTRACTION JOINT

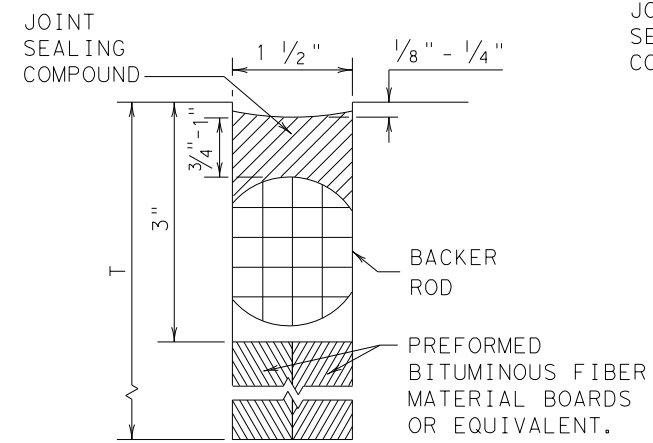


TRANSVERSE FORMED EXPANSION JOINT

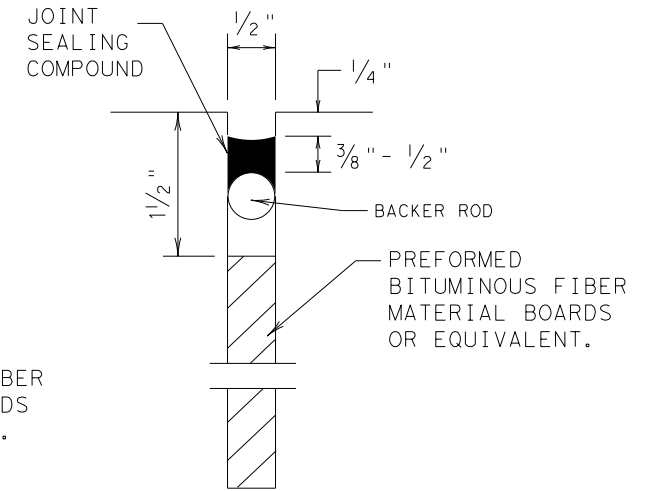


FORMED ISOLATION JOINT


METHOD A: PREFORMED COMPRESSION SEALS (PCS) (DMS-6310 CLASS 6)

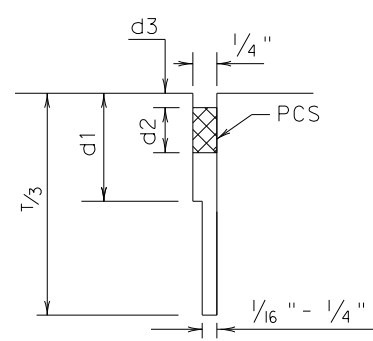


LONGITUDINAL SAWED CONTRACTION JOINT



LONGITUDINAL CONSTRUCTION JOINT

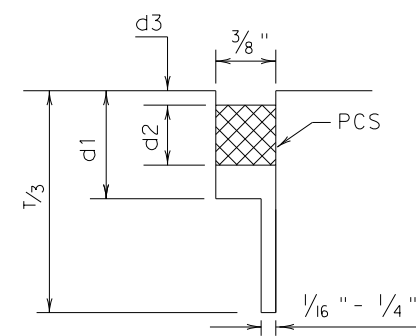

TRANSVERSE SAWED CONTRACTION JOINT

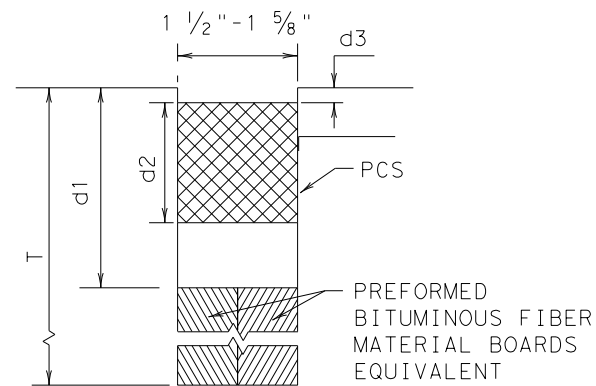


TRANSVERSE FORMED EXPANSION JOINT

GENERAL NOTES

- UNLESS OTHERWISE SHOWN IN THE PLANS, EITHER METHOD "A" OR METHOD "B" MAY BE USED.
- THE LOCATION OF JOINTS SHALL BE AS SHOWN ELSEWHERE IN THE PLANS.
- THE JOINT RESERVOIR FOR SEALANT OR PCS SHALL BE SAWED UNLESS OTHERWISE SHOWN ON THE PLANS FOR THE LONGITUDINAL AND TRANSVERSE CONSTRUCTION JOINTS AND THE SAWED JOINTS.
- DIMENSIONS d1, d2, AND d3 SHOWN IN METHOD A SHALL BE IN ACCORDANCE WITH THE PREFORMED COMPRESSION SEAL MANUFACTURER'S RECOMMENDATION.
- REFER TO DMS-6310 "JOINT SEALANTS AND FILLERS" FOR THE CLASSIFICATIONS.
- FOR SAWED LONGITUDINAL JOINT, LONGITUDINAL OR TRANSVERSE CONSTRUCTION JOINT, USE JOINT SEALANT CLASS 5 OR 8 UNLESS OTHERWISE SHOWN ON THE PLAN OR APPROVED.
- FOR TRANSVERSE SAWED CONTRACTION, TRANSVERSE FORMED EXPANSION JOINT, AND ISOLATION JOINT USE JOINT SEALANT CLASS 5 OR 8 AT NEW JOINTS. USE JOINT SEALANT CLASS 4, 5, 7, OR 8 FOR MAINTAINING EXISTING JOINTS.
- THE JOINTS SHALL BE CLEANED IN ACCORDANCE WITH THE ITEM 438 "CLEANING AND SEALING JOINTS" OR ITEM 713 "CLEANING AND SEALING JOINTS AND CRACKS (CONCRETE PAVEMENT)".
- ISOLATION JOINTS ACCOMMODATE HORIZONTAL AND VERTICAL MOVEMENTS THAT OCCUR BETWEEN A PAVEMENT AND A STRUCTURE. ISOLATION JOINTS MAY BE USED FOR BRIDGE ABUTMENTS, INTERSECTIONS, CURB AND GUTTER, OLD AND NEW PAVEMENTS, OR AROUND DRAINAGE INLETS, MANHOLES, FOOTINGS AND LIGHTING STRUCTURES.


		<b>Design Division Standard</b>	
<b>CONCRETE PAVING DETAILS</b> <b>JOINT SEALS</b> <b>JS-14</b>			
FILE: js14.dgn	DN: TxDOT	DN: HC	CK: AN
© TxDOT: DECEMBER 2014	CONT	SECT	HIGHWAY
REVISIONS	0156	12	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	58	

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.  
 DATE: 10/31/2023  
 FILE: pwt://txdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/3. Roadway/GF (31)-19.dgn

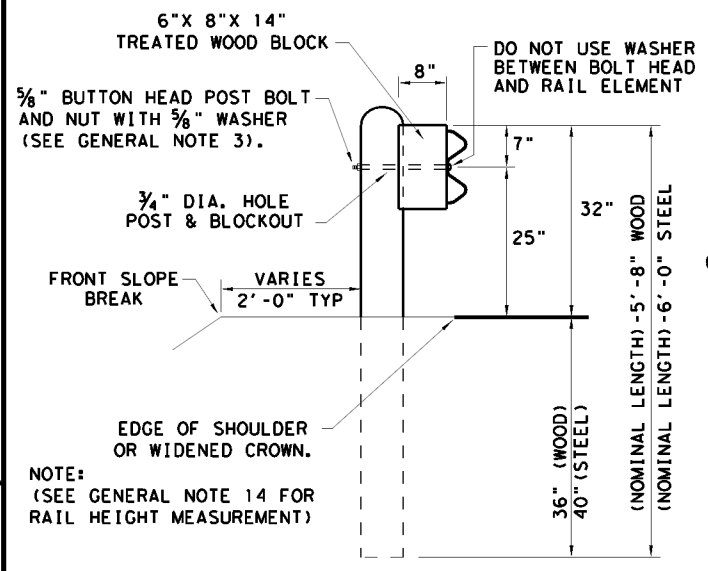


**TYPICAL POST PLACEMENT**

NOTE: \*\* "WOOD" INDICATES DIMENSIONS FOR BOTH ROUND AND RECTANGULAR WOOD POST SYSTEMS.

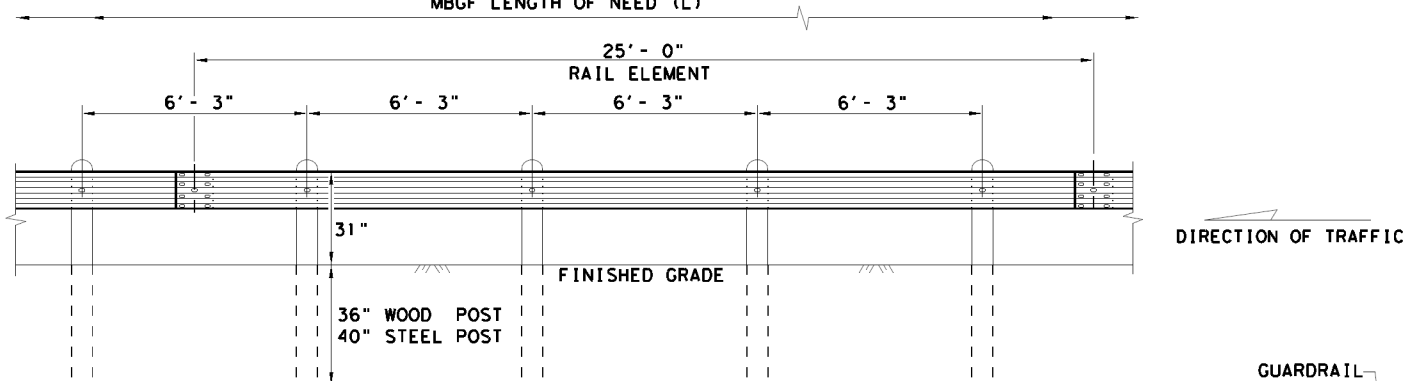


**ELEVATION MID-SPAN RAIL SPLICE**

SHOWING A 25' - 0" SECTION OF W-BEAM RAIL. (SEE GENERAL NOTE 2)

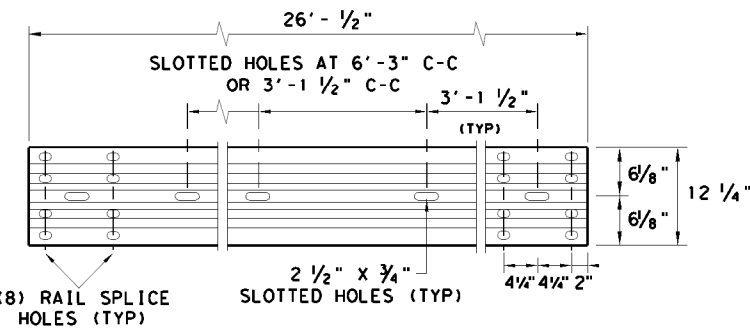


**ELEVATION 25' - 0" (NOM.) W-BEAM SECTION**

NOTES: SEE GENERAL NOTE 2 FOR ALLOWABLE RAIL TYPES. SEE RAIL SPLICE DETAIL FOR REQUIRED HARDWARE.

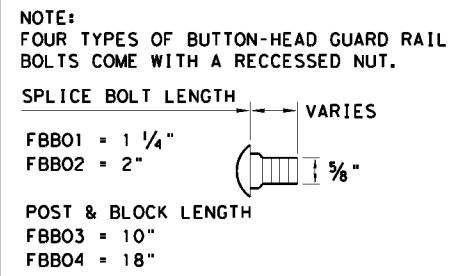


**BUTTON HEAD BOLT**

NOTE: SEE GENERAL NOTE 3 FOR SPLICE & POST BOLT DETAILS.

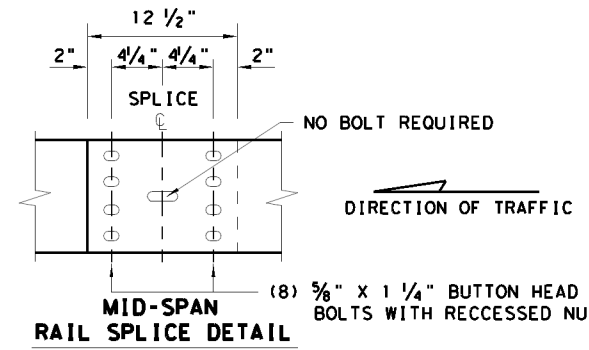

**MID-SPAN RAIL SPLICE DETAIL**


NOTE: GF(31), MID-SPAN RAIL SPLICES ARE REQUIRED WITH 6'-3" POST SPACINGS.

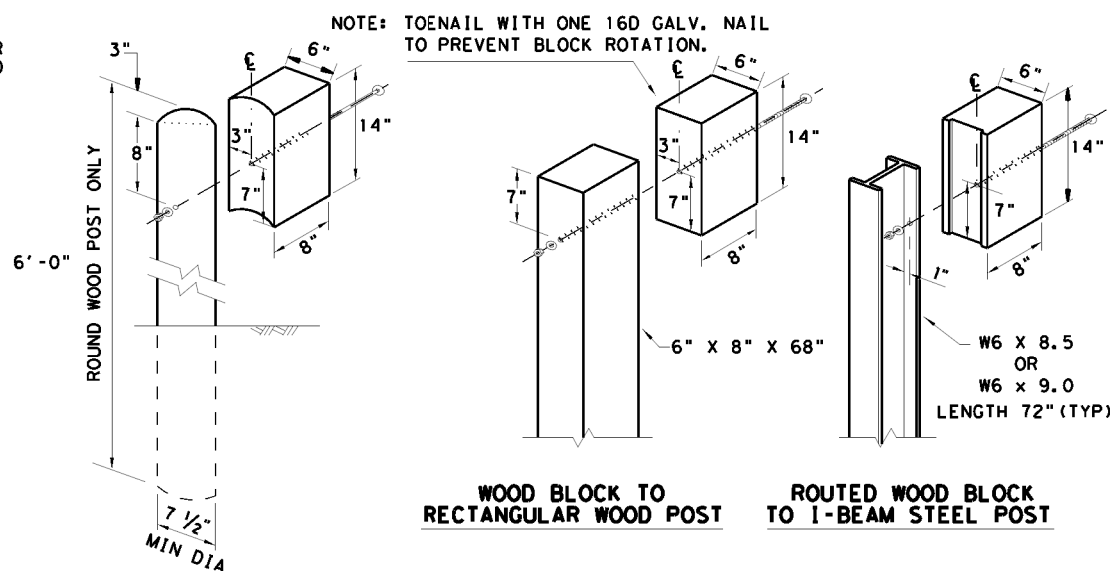

**WOOD BLOCK TO RECTANGULAR WOOD POST**      **ROUTED WOOD BLOCK TO I-BEAM STEEL POST**

**GENERAL NOTES**

1. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST, OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. THE EXACT POSITION OF MBGF SHALL BE SHOWN IN THE PLANS OR AS DIRECTED BY THE ENGINEER. STEEL POSTS TO BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING."
2. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED IN THE PLANS. THE CONTRACTOR MAY FURNISH RAIL ELEMENTS OF 25' - 0", OR 12' - 6" (NOM.) LENGTHS. RAIL ELEMENTS MAY HAVE SLOTTED HOLES AT 3'-1 1/2" C-C OR 6'-3" C-C. A SPECIAL LENGTH OF RAIL MAY BE MANUFACTURED TO ACCOMMODATE THE DOWNSTREAM ANCHOR TERMINAL (DAT) AND THE TRANSITION SECTIONS OF GUARDRAIL.
3. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 3/8" WASHER (FWC160) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
4. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING." FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
5. CROWN SHALL BE WIDENED TO ACCOMMODATE THE METAL BEAM GUARD FENCE.
6. THE LATERAL APPROACH TO THE GUARD FENCE, SHALL HAVE A MAXIMUM SLOPE OF 1V:10H.
7. IF SHOWN ELSEWHERE IN THE PLANS OR AS DIRECTED BY THE ENGINEER, THE GUARD FENCE MAY BE FLARED AT A RATE OF 25:1 OR FLATTER.
8. UNLESS OTHERWISE SHOWN IN THE PLANS, GUARD FENCE PLACED IN THE VICINITY OF CURBS SHALL BE POSITIONED SO THAT THE FACE OF CURB IS LOCATED DIRECTLY BELOW OR BEHIND THE FACE OF THE RAIL. RAIL PLACED OVER CURBS SHALL BE INSTALLED SO THAT THE POST BOLT IS LOCATED APPROXIMATELY 25 INCHES ABOVE THE GUTTER PAN OR EDGE OF SHOULDER.
9. APPLICATIONS IN SOLID ROCK ARE ONLY ALLOWED WITH STEEL POSTS. IF SOLID ROCK IS ENCOUNTERED WITHIN 0 TO 18" OF THE FINISHED GRADE, DRILL A 24" DIA. HOLE, 24" INTO THE ROCK. IF SOLID ROCK IS ENCOUNTERED BELOW 18", DRILL A 12" DIA. HOLE, 12" INTO THE ROCK OR TO THE STANDARD EMBEDMENT DEPTH, WHICHEVER MAYBE LESS. ANY EXCESS POST LENGTH, AFTER MEETING THESE DEPTHS, MAY BE FIELD CUT TO ENSURE PROPER GUARDRAIL MOUNTING HEIGHT. BACKFILL WITH COARSE AGGREGATE MATERIAL.
10. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
11. SPECIAL FABRICATION WILL BE REQUIRED AT INSTALLATION LOCATIONS HAVING A CURVATURE OF LESS THAN 150 FT. RADIUS.
12. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. THE CONSTRUCTION DIVISION, TxDOT MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210 ONLY PRODUCERS ON THE MPL MAY FURNISH COMPOSITE MATERIAL BLOCKS.
13. FOR THE LOW FILL CULVERT OPTION, POSTS LOCATED PARTIALLY OR WHOLLY BETWEEN PRECAST BOX CULVERT UNITS, THE USE OF A CAST-IN-PLACE CONCRETE CLOSURE BETWEEN BOXES IS REQUIRED. THE LENGTH OF THE CAST-IN-PLACE CONCRETE CLOSURE SHALL ACCOMMODATE THE PLACEMENT OF THE LOW FILL CULVERT OPTION. SEE CONCRETE CLOSURE DETAILS ON BRIDGE STANDARD SCP-MD.
14. GUARDRAIL HEIGHT MEASUREMENT: WHEN THE GUARDRAIL IS LOCATED ABOVE PAVEMENT, MEASURE THE HEIGHT FROM THE PAVEMENT TO THE TOP OF THE W-BEAM RAIL. WHEN THE GUARDRAIL IS LOCATED UP TO 2 FT. OFF OF THE EDGE OF PAVEMENT OR FOR A PAVEMENT OVERLAY, USE A 10-FOOT STRAIGHTEDGE TO EXTEND THE PAVEMENT/SHOULDER SLOPE TO THE BACK OF RAIL, MEASURE FROM THE BOTTOM OF STRAIGHTEDGE TO THE TOP OF RAIL. FOR GUARDRAIL LOCATED DOWN A 10:1 SLOPE, MEASURE FROM THE NOMINAL TERRAIN.

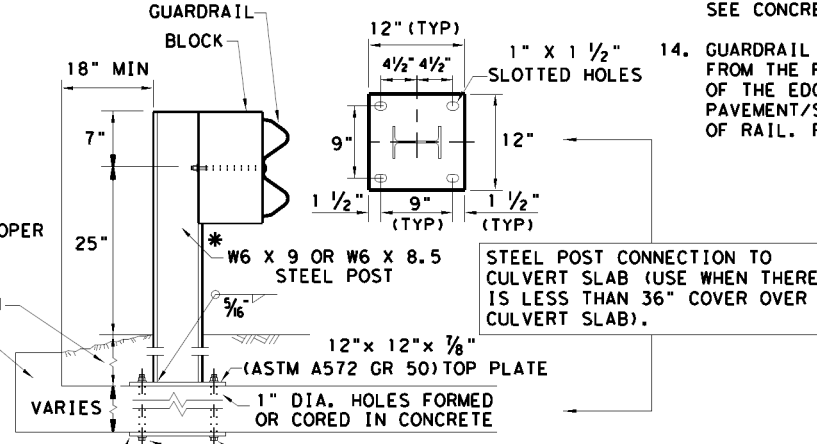



**LOW FILL CULVERT POST**

- NOTE: TWO INSTALLATION OPTIONS.
1. **BOLT-THROUGH OPTION:** REQUIRES A 6" MIN. SLAB THICKNESS. 3/8" DIA (ASTM A449) HEAVY HEX BOLTS WITH TWO HARDENED WASHER EACH AND HEAVY HEX NUTS. NOTE: BOLT LENGTH = SLAB PLUS 2 1/4" MIN.
  2. **EPOXY ANCHOR OPTION:** THIS OPTION MAY ONLY BE USED IF THE CULVERT SLAB IS 9" MIN. THICK. THREADED ANCHOR RODS MUST BE 3/8" DIA. ASTM A449 OR A193 GRADE B7 WITH HEAVY HEX NUT, AND ONE HARDENED WASHER EACH. EMBED ANCHOR RODS 6" WITH HILTI HIT RE 500 EPOXY ADHESIVE. OTHER TYPE III CLASS C EPOXY ADHESIVES MEETING THE REQUIREMENTS OF DMS-6100, "EPOXIES AND ADHESIVES", MAY BE USED IF IT CAN BE DEMONSTRATED THAT THEY MEET OR EXCEED THE STRENGTH OF HILTI HIT RE 500 WITH THE SAME EMBEDMENT DEPTH AND THREADED ROD DIA. FOLLOW THE MANUFACTURER'S REQUIREMENTS FOR INSTALLING EPOXIED THREADED RODS. EXTEND RODS 1/4" MIN. BEYOND NUT.

NOTE: CULVERTS OF 25 FT. OR LESS, SEE GF(31)LS STANDARD FOR "LONG SPAN" OPTION.

		Design Division Standard	
<h2>METAL BEAM GUARD FENCE</h2> <h3>TL-3 MASH COMPLIANT</h3> <h3>GF (31) - 19</h3>			
FILE: gf3119.dgn	DN: TxDOT	CK: KM	DW: VP
© TxDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	015612	020	SS 447
	DIST	COUNTY	SHEET NO.
	WFS	WICHITA	59

DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.  
 DATE: 11/1/2023  
 FILE: \\txdot.projectwiseonline.com:TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\GF (31)\DAT-19.dgn

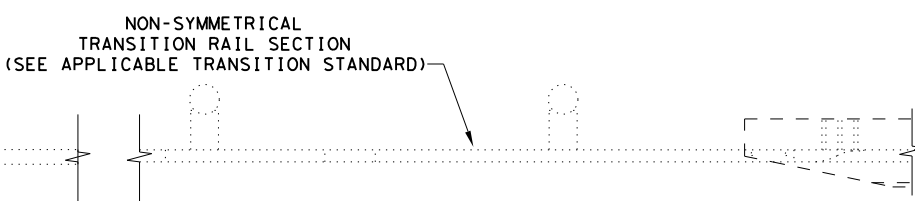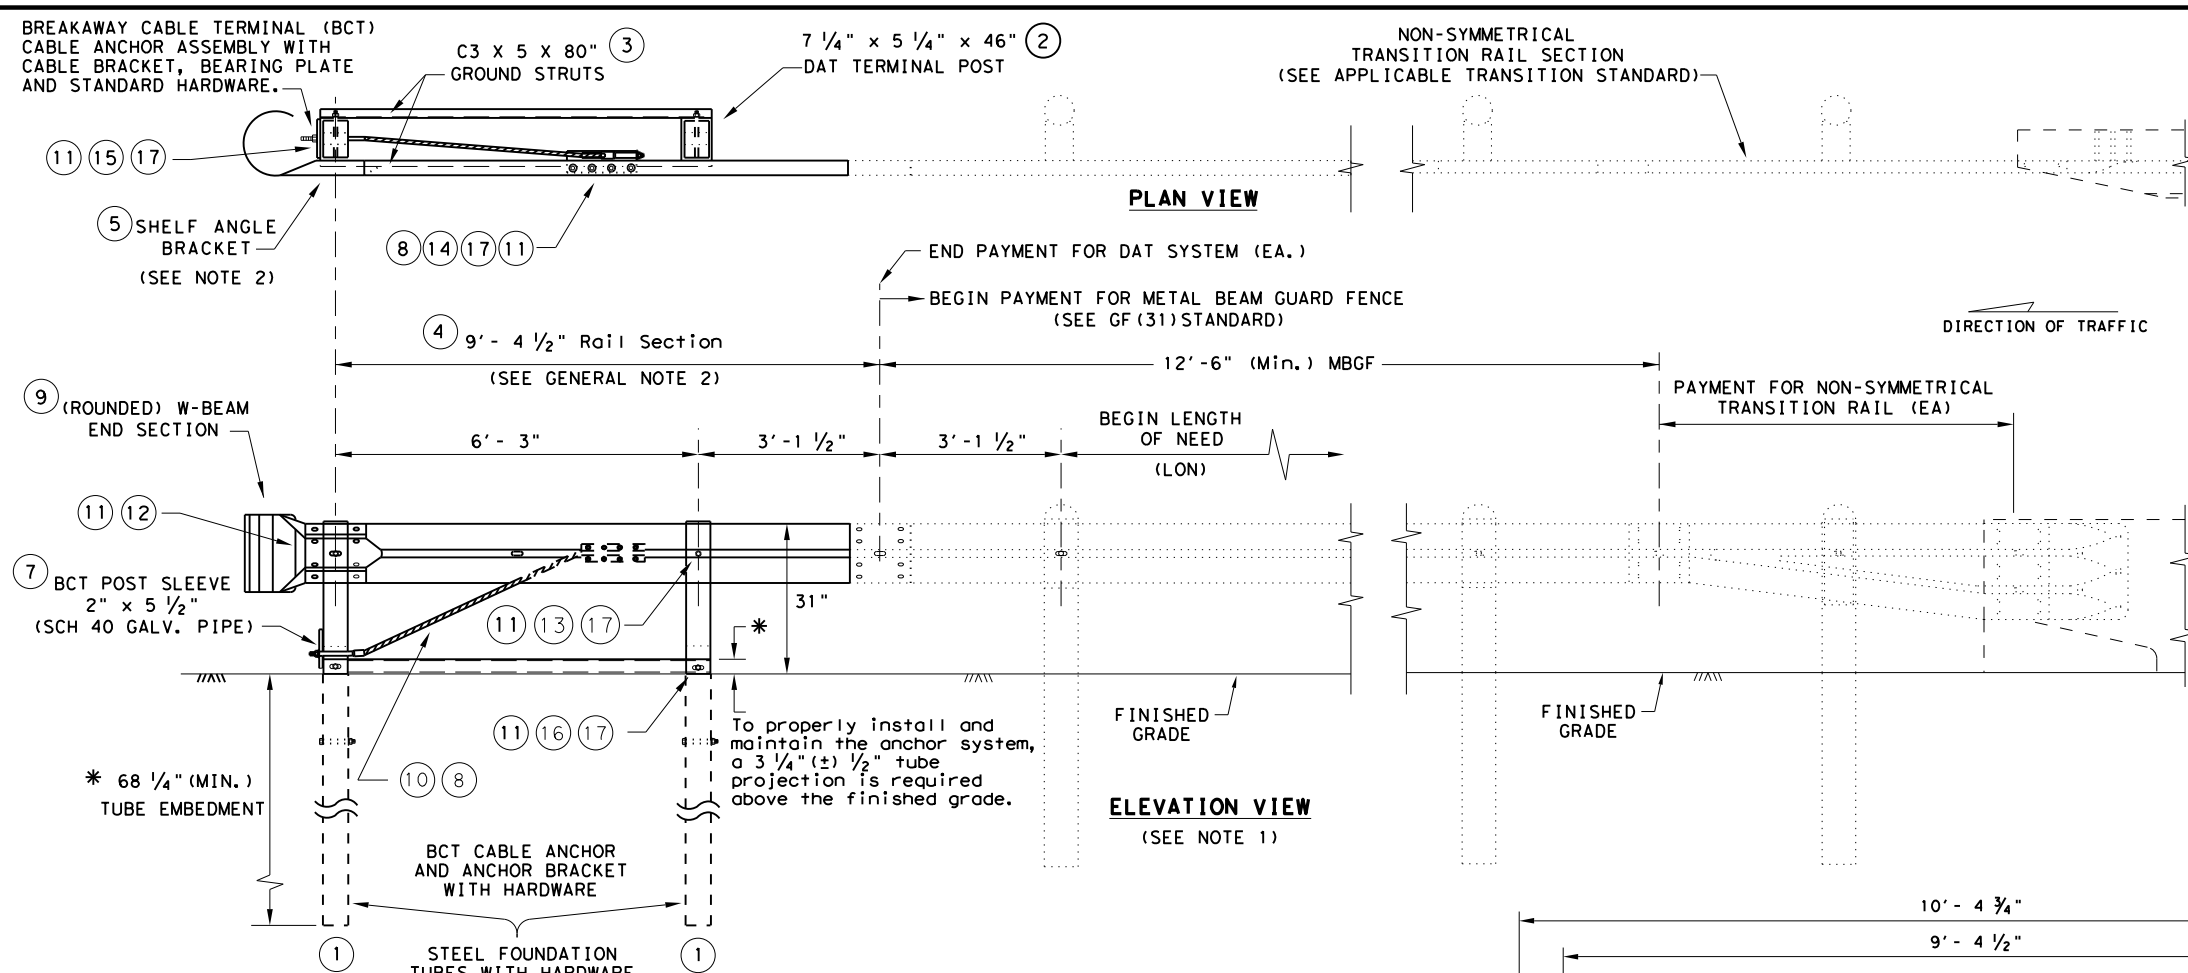


- GENERAL NOTES**
1. THE DETAIL SHOWN IS THE MINIMUM LENGTH OF NEED (LON) FOR A DOWNSTREAM ANCHOR TERMINAL (DAT) CONNECTED TO A CONCRETE RAIL.
  2. THE RAIL SECTION AT THE END POST IS SUPPORTED BY THE SHELF ANGLE BRACKET. THE RAIL ELEMENT IS NOT ATTACHED TO THE END POST.
  3. THE FOUNDATION TUBES SHALL NOT PROJECT MORE THAN 3 3/4" ABOVE THE FINISHED GRADE.
  4. ALL HARDWARE FOR DAT SHALL BE ASTM A307 UNLESS OTHERWISE SHOWN.
  5. REFER TO GF (31) SHEET FOR TERMINAL CONNECTION DETAILS.








**MOW STRIP INSTALLATION**  
 IF A MOW STRIP IS REQUIRED WITH THE DAT INSTALLATION THE LEAVE-OUT AREA AROUND THE STEEL FOUNDATION TUBES AND THE TWO CHANNEL STRUTS MAY BE OMITTED. THIS WILL REQUIRE A FULL POUR AT THE FOUNDATION TUBES.

**DOWNSTREAM ANCHOR TERMINAL (DAT)**

NOTE: ONLY FOR DOWNSTREAM USE, WHEN LOCATED OUTSIDE THE HORIZONTAL CLEARANCE AREA OF OPPOSING TRAFFIC.

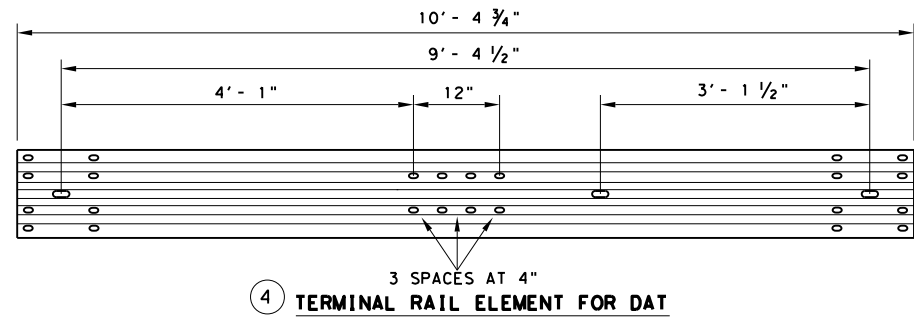

#	(DAT) PARTS LIST	QTY
1	STEEL FOUNDATION TUBE	2
2	DAT TERMINAL POST	2
3	CHANNEL STRUT	2
4	TERMINAL RAIL ELEMENT	1
5	SHELF ANGLE BRACKET	1
6	BCT BEARING PLATE	1
7	BCT POST SLEEVE	1
8	GUARDRAIL ANCHOR BRACKET	1
9	(ROUNDED) W-BEAM END SECTION	1
10	BCT CABLE ANCHOR	1
11	RECESSED NUT, GUARDRAIL	20
12	1 1/4" BUTTON HEAD BOLT	4
13	10" BUTTON HEAD BOLT	2
14	5/8" X 2" HEX HEAD BOLT	8
15	5/8" X 8" HEX HEAD BOLT	4
16	5/8" X 10" HEX HEAD BOLT	2
17	5/8" FLAT WASHER	18

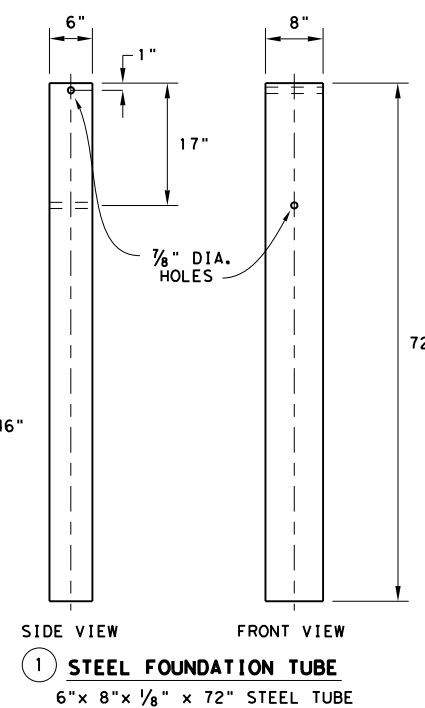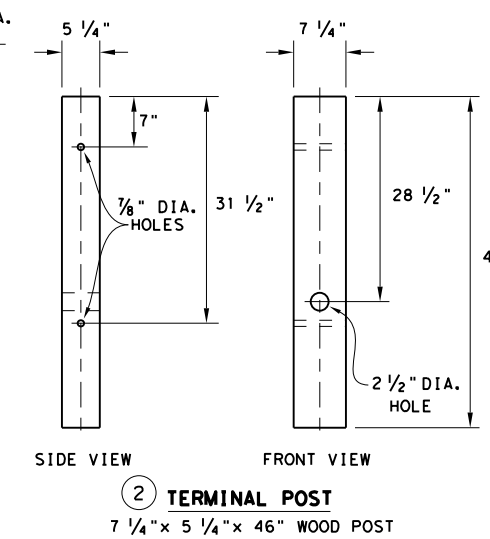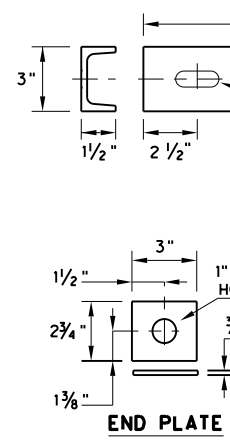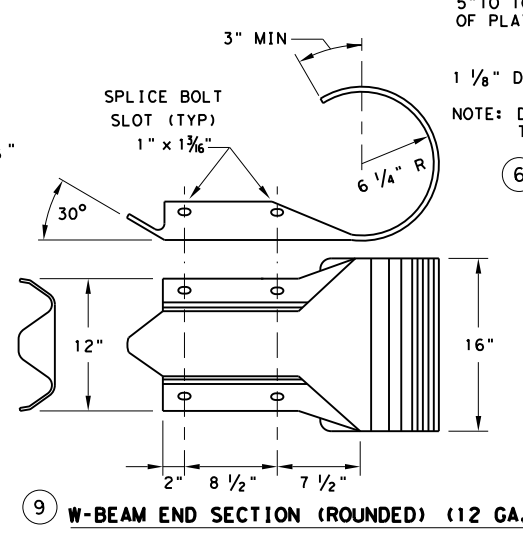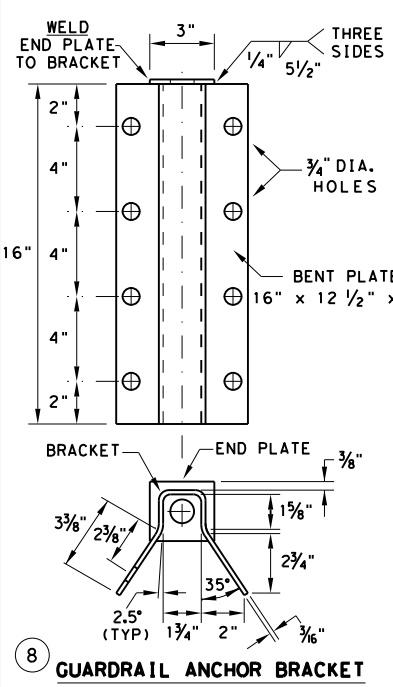


Design Division Standard

**METAL BEAM GUARD FENCE  
 (DOWNSTREAM ANCHOR TERMINAL)  
 TL-3 MASH COMPLIANT  
 GF (31) DAT-19**


FILE: gf31dat19.dgn	DN: TXDOT	CK: KM	DW: VP	CK: CGL/AG
© TXDOT: NOVEMBER 2019	CONT	SECT	JOB	HIGHWAY
REVISIONS	0156	12	020	SS 447
	DIST	COUNTY	SHEET NO.	
	WFS	WICHITA	60	

DATE: 11/1/2023  
 FILE: \\txdot.projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\GF (31)MS-19.dgn  
 DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

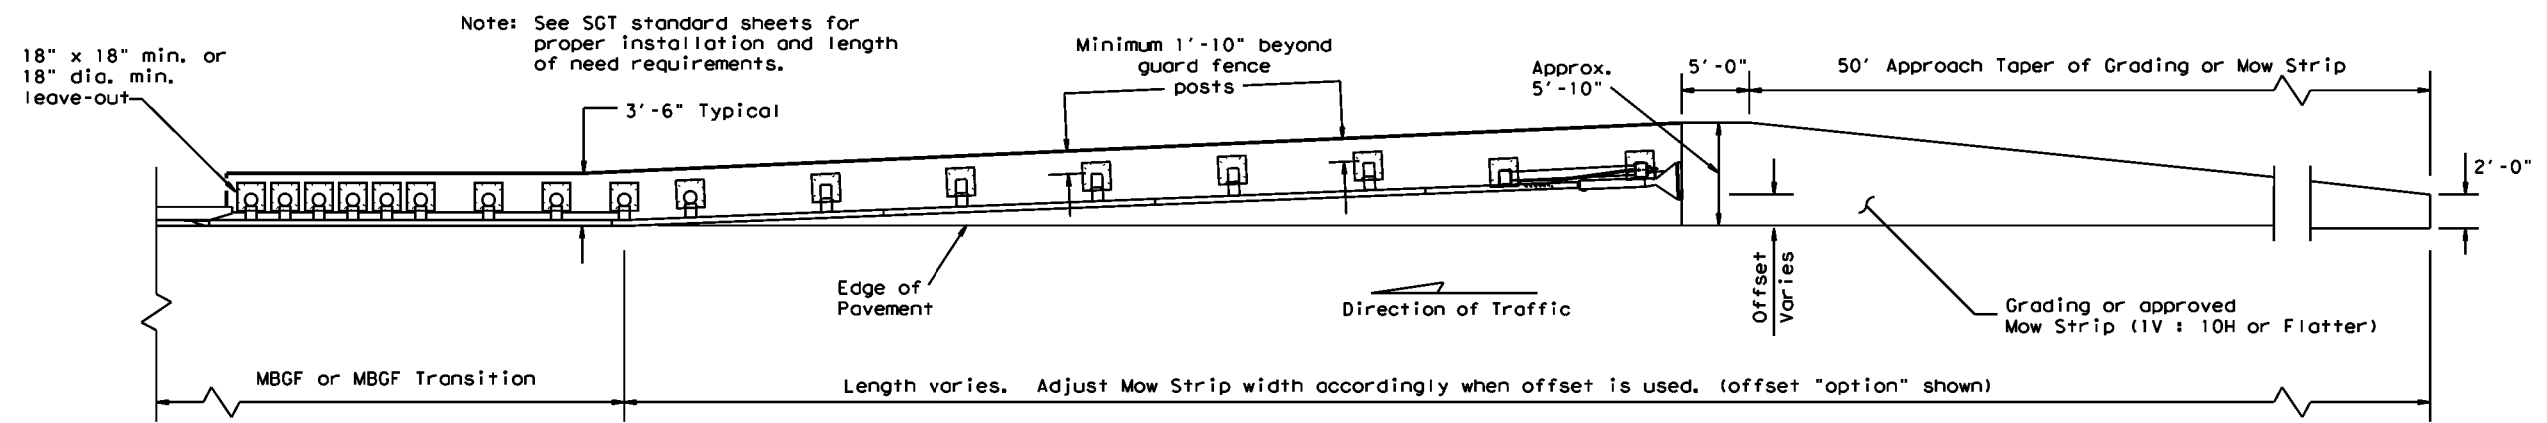


**GRADING AND MOW STRIP AT GUARDRAIL END TREATMENTS**

Note: Site Condition(s)  
 Site conditions may exist where grading is required for the proper installation of metal guard fence and end treatments.  
 Approach grading or mow strip may be decreased or eliminated, as directed by the Engineer.

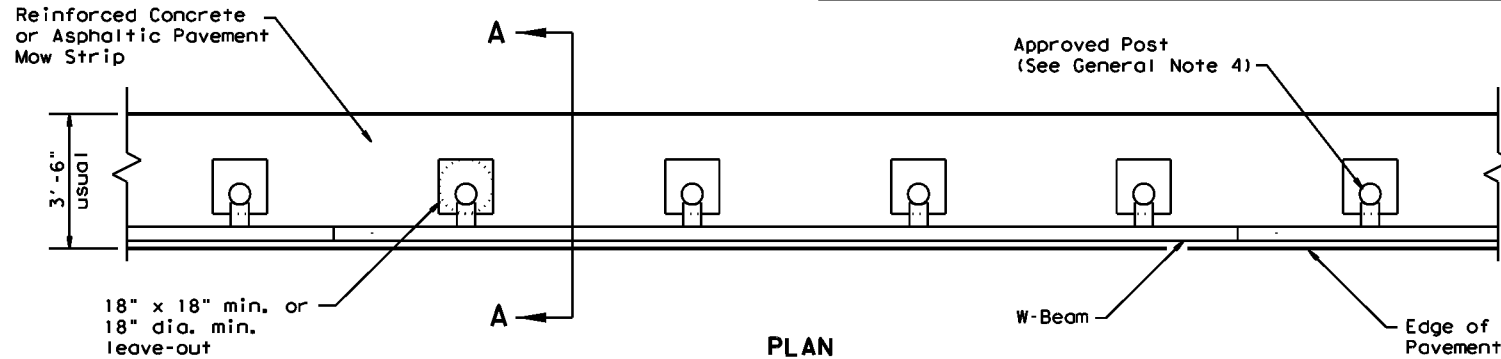


**PLAN**

GF(31) shown with Mow Strip  
 (See GF(31) standard sheet for proper installation)

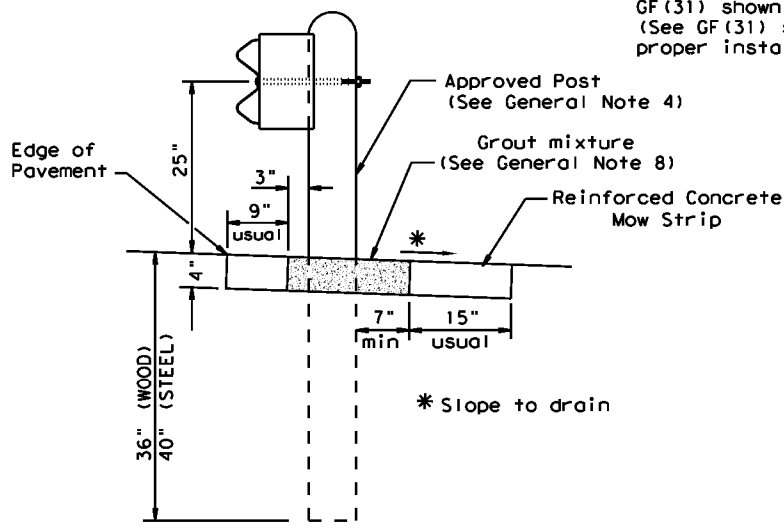

**SECTION A-A**

Typical

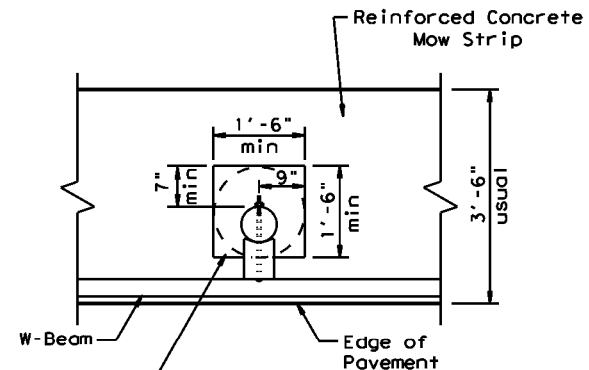


**MOW STRIP DETAIL**

Reinforced Concrete Mow Strip with 18" x 18" Square or 18" Dia. minimum leave-out.


Fill leave-out with Grout mixture (See General Note 8)

- GENERAL NOTES**
1. This mow strip design is for use with metal beam guard fence, guard fence transitions, and guard fence end treatments. See applicable GF(31) MBGF or GF(31) Transition Standard sheet for additional information.
  2. Mow strips shall be reinforced concrete with (wire mesh or synthetic fiber), as shown on the plans and will be paid for under the pertinent bid item. Reinforced concrete shall be placed in accordance with Item 432, "Riprap." The use of the synthetic fiber in lieu of steel reinforcing is acceptable, provided the fiber producer is on the Department Material Producer List (MPL), maintained by TxDOT, Construction Division.
  3. The leave-out behind the post shall be a minimum of 7".
  4. Only steel (W6 x 8.5 or W6 x 9.0), or 7 1/2" Dia. round wood posts are acceptable for use in the mow strip. See GF(31) Standard for additional details.
  5. Other curb placement options may be used. Curbs are not considered part of the mow strip and will be paid for under other pertinent bid item.
  6. Thickness of the mow strip will be 4".
  7. The limits of payment for reinforced concrete will include leave-outs for the posts.
  8. The leave-outs shall be filled with a Grout mixture consisting of: 2719 pounds sand, 188 pounds Type I or II cement, and 550 pounds of water per cubic yard, with a 28-day compressive strength of approximately 230 psi or less. Provide grout with a consistency that will flow into and completely fill all voids. Due to auger size, larger leave-out dimensions are acceptable from both an impact performance and maintenance repair standpoint (Suggested Maximum leave-out of 20"). Payment for furnishing and placing the grout mixture will be subsidiary to the pay item of riprap mow strip.

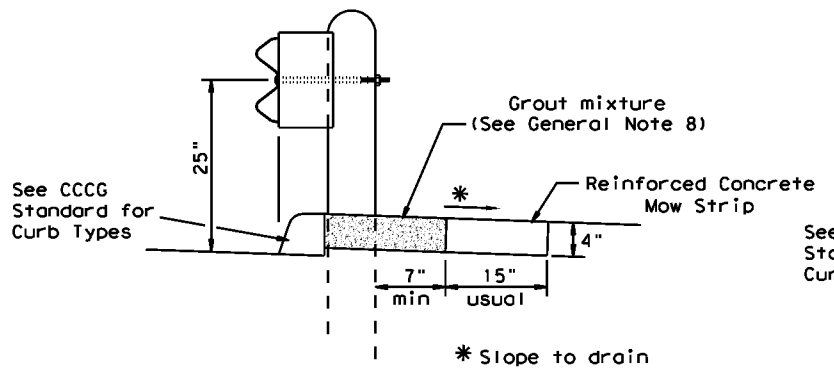


**CURB OPTION (1)**

This option will increase the post embedment throughout the system.

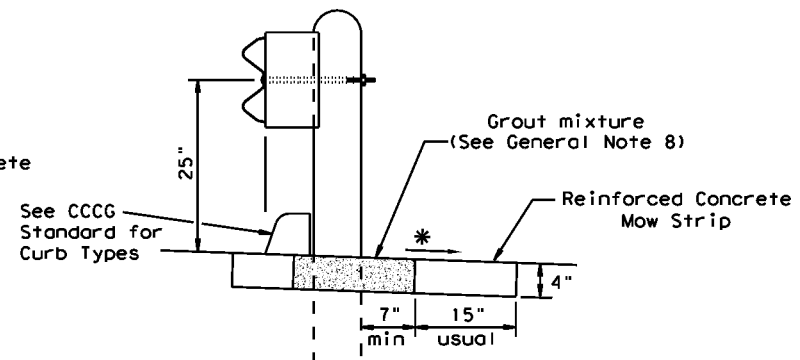

**CURB OPTION (2)**


Curb shown on top of mow strip

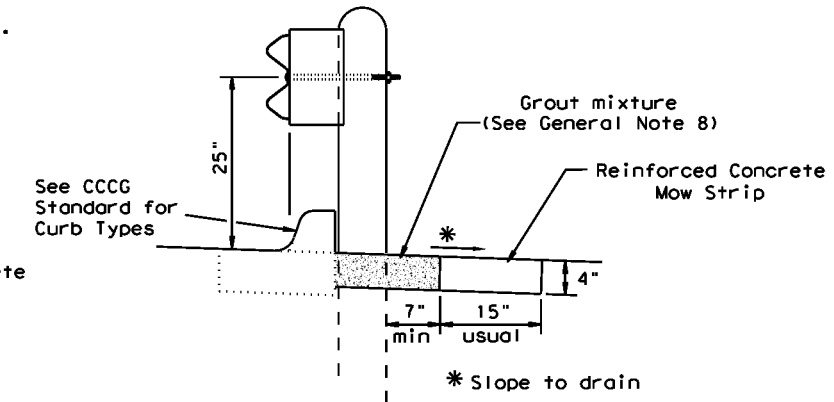

**CURB OPTION (3)**

		Design Division Standard	
<b>METAL BEAM GUARD FENCE (MOW STRIP)</b> <b>TL-3 MASH COMPLIANT</b> <b>GF (31)MS-19</b>			
FILE: gf31ms19.dgn	DN:TxDOT	CK:KM	DW:VP
©TXDOT: NOVEMBER 2019	CONT	SECT	JOB
REVISIONS	015612	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	61	






DATE: 11/1/2023  
 FILE: \\txdot.projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\GF (31) TR TL3-20.dgn  
 DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

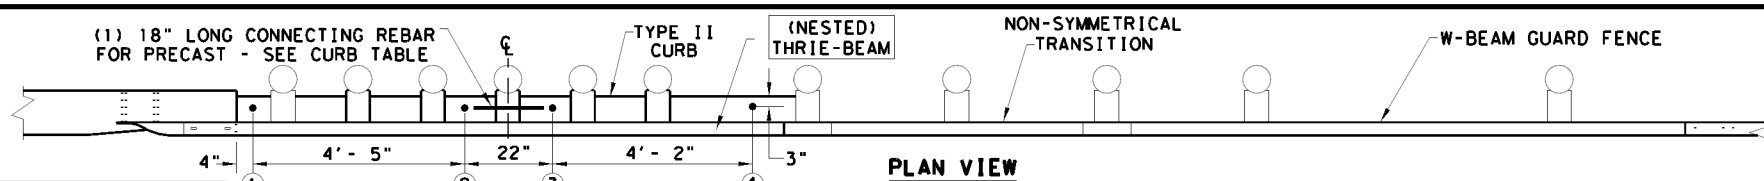


- (5) 1" DIA. HOLES.
- (5) 5/8" DIA. HEAVY HEX HEAD BOLTS (FACING TRAFFIC SIDE) (ASTM F3125 GR A325 OR A449).
- (10) 1 3/4" O.D. WASHER UNDER EACH HEX BOLT HEAD AND NUT.
- (5) 5/8" DIA. HEAVY HEX NUTS (ASTM A194 OR A563).

NOTE: HEAVY HEX BOLT LENGTH WILL VARY DEPENDING ON WIDTH CONCRETE RAIL, LEAVE 1" OF BOLT LENGTH PAST THE 5/8" HEX NUT. TRIM AS REQUIRED.

NOTE: CURB IS A REQUIRED COMPONENT FOR THE TRANSITION TO FUNCTION PROPERLY. SEE GENERAL NOTES: 2-4 AND 16-17.

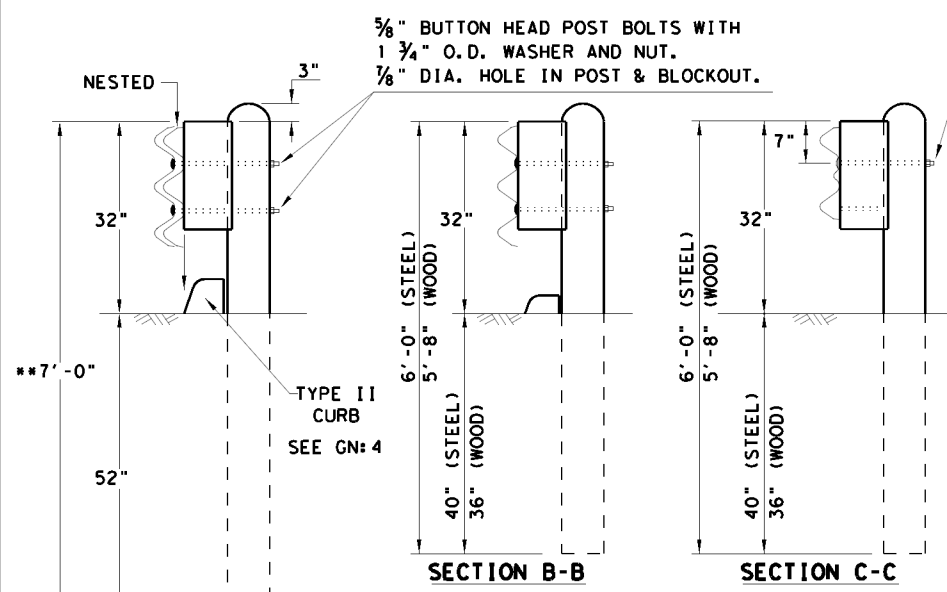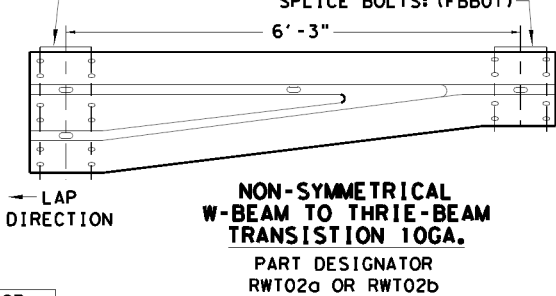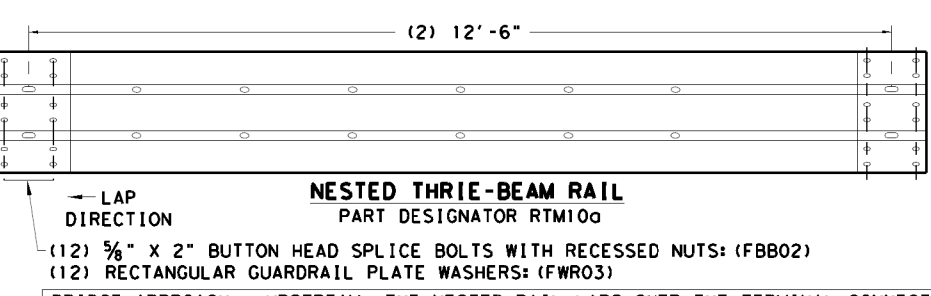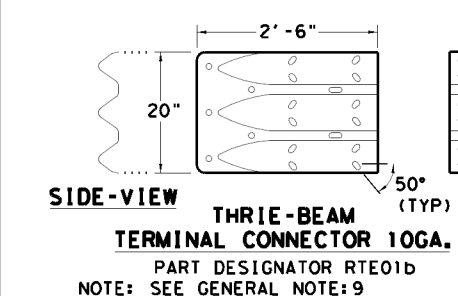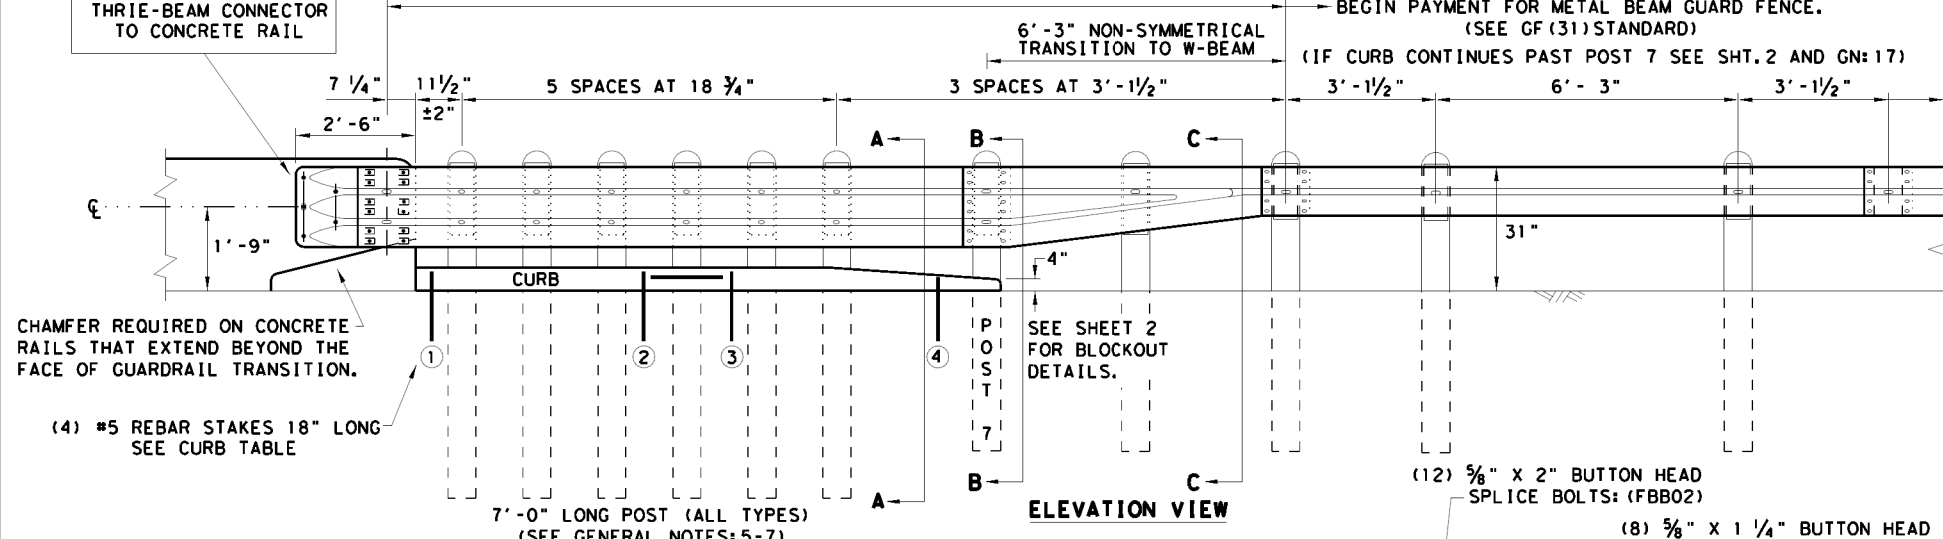

THRIE-BEAM TERMINAL - CURB TABLE	
PRECAST CURB FULL LENGTH EQUALS 12'-2" THE PRECAST CURB MAY BE FORMED INTO TWO SECTIONS.	
CURB (1)	LENGTH 5'-8"
CURB (2)	LENGTH 6'-6"
TAPER CURB (2) TO A HEIGHT OF 4" AT POST 7	
CONNECTING PRECAST CURB SECTIONS (1) & (2):	
FORM OR CORE 1" DIA. HOLE 9" LONG INTO EACH CURB END. USE (1) #5 GR.60 REBAR 18" LONG TO CONNECT BOTH CURBS.	
SECURING PRECAST OR CAST-IN-PLACE TO FINISHED GRADE *:	
FORM OR CORE (4) 1" DIA. HOLES, SEE PLAN AND ELEVATION VIEWS FOR HOLE LOCATIONS. DRIVE (4) #5 GR.60 REBAR STAKES 18" LONG INTO THE GROUND AND 1/2" BELOW TOP OF CURB.	
FILL HOLES WITH APPROVED GROUT MIXTURE.	

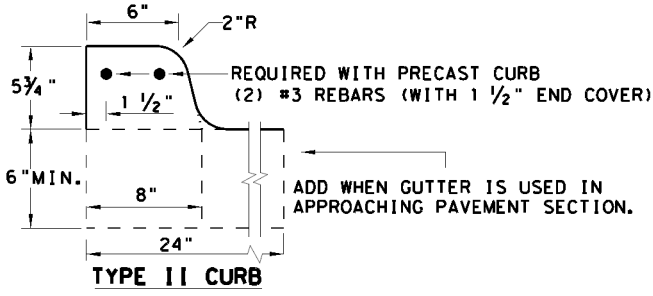

\* NOTES: NOT NEEDED FOR CAST-IN-PLACE. SEE TYPE II CURB DETAIL FOR REBAR AND COVER REQUIREMENTS. PERCUSSION DRILLING IS NOT PERMITTED WITH: TYPE II CURB, BRIDGE RAIL OR CONCRETE TRAFFIC RAIL.

**GENERAL NOTES**


1. CONTACT THE DESIGN DIVISION FOR DRAINAGE CUT OUT OPTIONS NEEDED WITHIN THE CURB SECTION OF THE THRIE-BEAM TRANSITION. (512) 416-2678
2. CONCRETE CURB MAY BE CAST-IN-PLACE OR PRECAST AS SHOWN ON THIS SHEET. WHEN USED IN CONJUNCTION WITH THE THRIE-BEAM TRANSITIONS, CURB SHALL BE TYPE II (5- 3/4" HEIGHT); SEE CURRENT CCG STANDARD SHEET FOR FURTHER DETAILS. IF OTHER CURB HEIGHTS ARE SHOWN IN THE PLANS IN CONJUNCTION WITH THE TRANSITION, THE CURB HEIGHT MAY BE FROM 4" TO 8" WITH A RELATIVELY VERTICAL FACE. CONCRETE CURB SHALL BE CONTINUOUS TO THE SEVENTH POST UNLESS OTHERWISE SHOWN IN THE PLANS. SEE GENERAL NOTE:17 FOR CIRCUMSTANCES WHERE CURB CONTINUES PAST POST 7.
3. CONCRETE CURB TYPE II SUBSIDIARY TO "METAL BEAM GUARD FENCE TRANSITION". IF NO ADDITIONAL CURB IS INDICATED BEYOND THE TRANSITION, THEN ANY CURB HEIGHT GREATER THAN 4" WILL BE TAPERED DOWN BEGINNING AT THE LAST 7 FT. POST TO A MAXIMUM HEIGHT OF 4" AT POST 7. IF SHOWN ELSEWHERE IN THE PLANS, ADDITIONAL CURB UNDERNEATH GUARDRAIL WILL BE PAID FOR BY THE LINEAR FOOT.
4. UNLESS OTHERWISE SHOWN IN THE PLANS, TRANSITIONS SHALL BE PLACED WITH THE BLOCKOUT FACE IN FRONT OF OR DIRECTLY ABOVE THE CURB FACE. SEE SECTION A-A.
5. FOR ROUND WOOD POST SYSTEMS, ALL ROUND WOOD POSTS SHALL BE 7 1/2" DIA. MINIMUM THROUGHOUT THE THRIE-BEAM TRANSITION.
6. THE TYPE OF POST (ROUND WOOD POST, RECTANGULAR WOOD POST OR STEEL POST) WILL BE AS SHOWN IN THE PLANS. REFER TO GF (31) STANDARD SHEET.
7. THE POST LENGTH SHALL BE MARKED ON ALL 7'- 0" LONG POSTS BY THE MANUFACTURER. THE MARK SHALL BE LOCATED WITHIN THE TOP 1 FT. REGION OF THE POST, AT LEAST 5/8" IN HEIGHT, AND VISIBLE AFTER INSTALLATION. WOODEN POSTS SHALL BE MARKED WITH A BRAND, AND STEEL POSTS WITH A STENCIL BEFORE GALVANIZING.
8. POSTS SHALL NOT BE SET IN CONCRETE, OF ANY DEPTH.
9. RAIL ELEMENTS SHALL MEET THE REQUIREMENTS OF ITEM 540, "METAL BEAM GUARD FENCE" EXCEPT AS MODIFIED ON THE PLANS. THE THRIE-BEAM TERMINAL CONNECTOR AND THE THRIE-BEAM TRANSITION TO W-BEAM SHALL BE OF THE SAME MATERIAL, BUT SHALL NOT BE LESS THAN 10 GAUGE. CONTRACTOR SHALL VERIFY THAT THE LOCATIONS OF BOLT HOLES MATCH THOSE IN THE THRIE-BEAM TERMINAL CONNECTOR PRIOR TO ORDERING MATERIALS.
10. BUTTON HEAD "POST BOLTS & NUTS" SHALL MEET THE REQUIREMENTS OF (ASTM A307), AND SHALL BE OF SUFFICIENT LENGTH TO EXTEND THROUGH THE FULL THICKNESS OF THE NUT AND 5/8" WASHER (FWC16G) AND NOT MORE THAN 1" BEYOND IT. TRIM REMAINING BOLT LENGTH TO MEET REQUIRED LENGTH.
11. FITTINGS (BOLTS, NUTS, AND WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
12. CROWN SHALL BE WIDENED TO ACCOMMODATE TRANSITIONS.
13. WHERE SOLID ROCK IS ENCOUNTERED, CONTACT THE DESIGN DIVISION FOR ADDITIONAL GUIDANCE. (512) 416-2678
14. UNLESS OTHERWISE SHOWN IN THE PLANS, A COMPOSITE MATERIAL BLOCK THAT MEETS THE REQUIREMENTS OF DMS-7210, "COMPOSITE MATERIAL POSTS AND BLOCKS FOR METAL BEAM GUARD FENCE" MAY BE SUBSTITUTED FOR BLOCKS OF SIMILAR DIMENSIONS. TXDOT'S MATERIALS AND TESTS DIVISION MAINTAINS A MATERIAL PRODUCER LIST (MPL) FOR PRODUCERS OF MATERIALS CONFORMING TO DMS-7210. ONLY PRODUCERS ON THE MPL CAN FURNISH COMPOSITE MATERIAL BLOCKS.
15. REFER TO GF (31) STANDARD SHEET & BRIDGE RAILING DETAILS FOR ADDITIONAL DETAILS.
16. THE INSTALLATION OF THE TYPE II CURB IS CRITICAL FOR THE PERFORMANCE OF THE THRIE-BEAM TRANSITION SYSTEM. THE CURB PREVENTS (VEHICLE WHEEL SNAGGING) AT THE CONCRETE RAIL AND IS REQUIRED TO MEET MASH CRASH TEST CRITERIA.
17. IF CURB EXTENDS BEYOND POST 7, 25' OF NESTED W-BEAM GUARDRAIL SHALL BE INSTALLED BEYOND THE PAY LIMITS OF THRIE-BEAM TRANSITION SECTION, (SEE SHT.2). PAYMENT FOR THIS 25' SECTION WILL BE BY LINEAR FOOT, PAY ITEM "0540 6XXX MTL W-BEAM GD FEN (NESTED) (TIM POST)" OR "540 6XXX MTL W-BEAM GD FEN (NESTED) (STEEL POST)" AS APPLICABLE FOR POST TYPE. SEE SHT.2 FOR ADDITIONAL INFORMATION.

**HIGH-SPEED TRANSITION  
SHEET 1 OF 2**


		Design Division Standard	
<b>METAL BEAM GUARD FENCE THRIE-BEAM TRANSITION TL-3 MASH COMPLIANT GF (31) TR TL3-20</b>			
FILE: gf31trtl320.dgn	DN: TXDOT	CK: KM	DW: VP
© TXDOT: NOVEMBER 2020	CONT	SECT	JOB
REVISIONS	015612	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	62	

DATE: 11/1/2023  
 FILE: p:\w\projectwiseonline.com:TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3. Roadway\GF (31) TR TL3-20.dgn  
 DISCLAIMER: THE USE OF THIS STANDARD IS COVERED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


REQUIRED ALTERNATIVE FOR CONTINUOUS CURB EXTENDING PAST POST 7 (SEE SHT. 1 GENERAL NOTE 17)

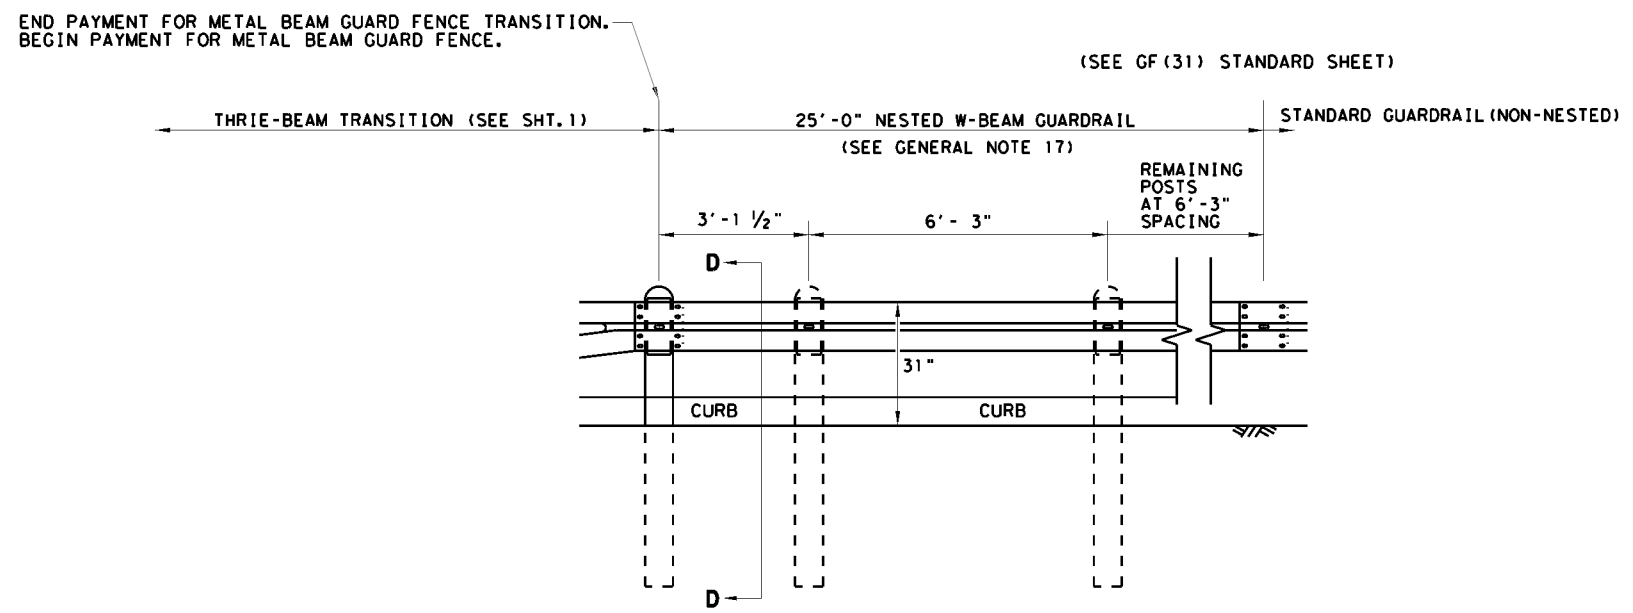

ELEVATION VIEW

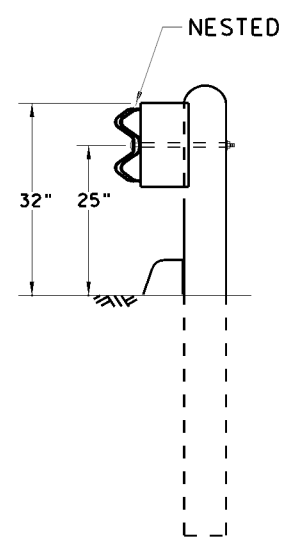

SECTION D-D

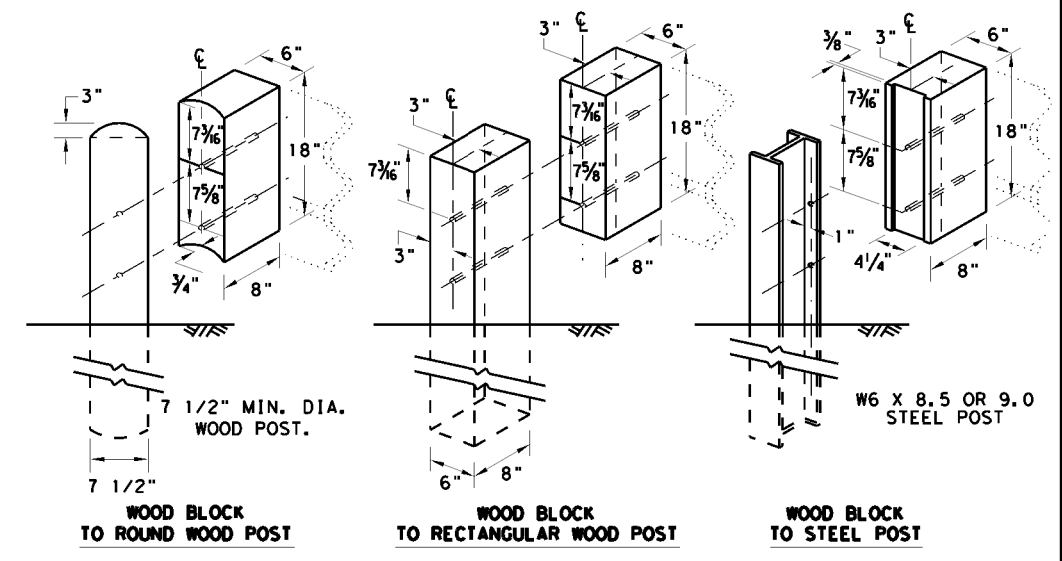

THREE BEAM TRANSITION BLOCKOUT DETAILS

HIGH-SPEED TRANSITION

SHEET 2 OF 2


		Design Division Standard	
<b>METAL BEAM GUARD FENCE THREE-BEAM TRANSITION TL-3 MASH COMPLIANT</b>			
<b>GF (31) TR TL3-20</b>			
FILE: gf31tr+1320.dgn	DN: TXDOT	CK: KM	DW: KM
©TXDOT: NOVEMBER 2020	CONT	SECT	JOB
REVISIONS	0156 12	020	SS 447
DIST	COUNTY		SHEET NO.
WFS	WICHITA		63









DATE: 11/1/2023  
 FILE: D:\w\projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\3 - Roadway\SGT(12S)31-18.dgn  
 DISCLAIMER: THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TXDOT FOR ANY PURPOSE WHATSOEVER. TXDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

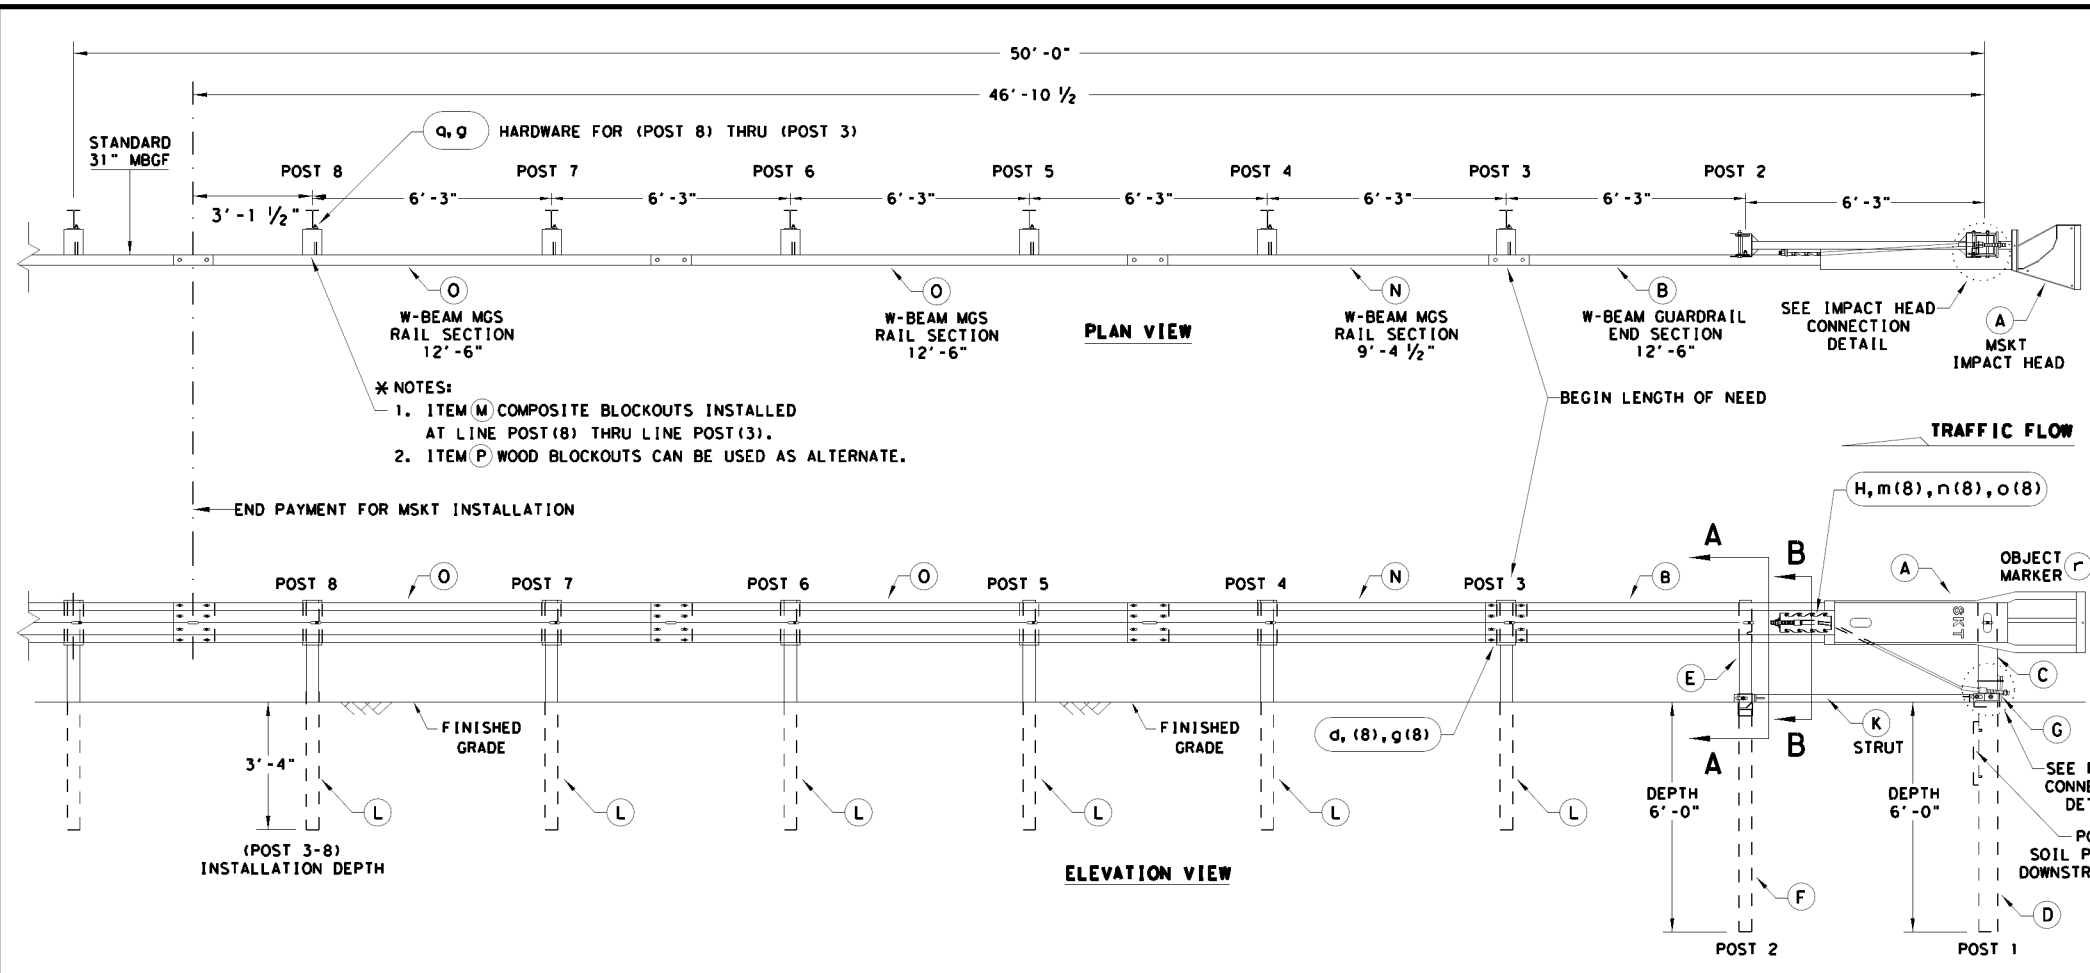

- GENERAL NOTES**
- FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE SYSTEM, CONTACT: ROAD SYSTEMS, INC. (432)263-2435. 3616 OLD HOWARD COUNTY AIRPORT, BIG SPRING, TX 79720
  - FOR INSTALLATION, REPAIR AND MAINTENANCE REFER TO THE: MSKT END TERMINAL, PRODUCT DESCRIPTION ASSEMBLY MANUAL (PUBLICATION-062717).
  - APPLY HIGH INTENSITY REFLECTIVE SHEETING, "OBJECT MARKER" ON THE FRONT FACE OF THE DEVICE PER MANUFACTURER'S RECOMMENDATIONS. OBJECT MARKER SHALL CONFORM TO THE STANDARDS REQUIRED IN TEXAS MUTCD.
  - FOR POST (LEAVE-OUT) INSTALLATION AND GUIDANCE SEE TXDOT'S LATEST ROADWAY MOW STRIP STANDARD.
  - HARDWARE (BOLTS, NUTS, & WASHERS) SHALL BE GALVANIZED IN ACCORDANCE WITH ITEM 445, "GALVANIZING". FITTINGS SHALL BE SUBSIDIARY TO THE BID ITEM.
  - SYSTEM SHOWN USING STEEL WIDE FLANGE POSTS WITH COMPOSITE BLOCKOUTS.
  - A COMPOSITE MATERIAL BLOCKOUTS THAT MEETS THE REQUIREMENTS OF DMS-7210, MAY BE SUBSTITUTED FOR BLOCKOUTS OF SIMILAR DIMENSIONS. SEE CONSTRUCTION DIVISION MATERIAL PRODUCER LIST (MPL) FOR CERTIFIED PRODUCERS.
  - IF SOLID ROCK IS ENCOUNTERED IN THE AREA OF (POST 1) AND / OR (POST 2) CONTACT THE MANUFACTURER, & REFER TO THE LATEST ROADWAY MBGF STANDARD FOR INSTALLATION GUIDANCE.
  - POSTS SHALL NOT BE SET IN CONCRETE.
  - SYSTEM MUST BE ATTACHED TO STANDARD 31" MBGF.
  - UNDER NO CIRCUMSTANCES SHALL THE GUARDRAIL WITHIN THE MSKT SYSTEM BE CURVED.
  - A FLARE RATE OF UP TO 25:1 MAY BE USED TO PREVENT THE TERMINAL HEAD FROM ENCRoACHING ON THE SHOULDER. THE FLARE MAY BE DECREASED OR ELIMINATED FOR SPECIFIC INSTALLATIONS, IF DIRECTED BY THE ENGINEER.
  - THE SYSTEM IS SHOWN WITH TWO 12'-6" MBGF PANELS, ONE 25'-0" MBGF PANEL IS ALSO ALLOWED IN THEIR PLACE.
  - A DRIVING CAP WITH A TIMBER OR PLASTIC INSERT SHALL BE USED WHEN DRIVING POSTS 3-8 TO PREVENT DAMAGE TO THE GALVANIZING ON TOP OF THE POST. SPECIAL DRIVING CAP TO BE USED ON LOWER POSTS 1 & 2 TO PREVENT DAMAGE TO THE WELDED PLATES.

ITEM	QTY	MAIN SYSTEM COMPONENTS	ITEM NUMBERS
A	1	MSKT IMPACT HEAD	MS3000
B	1	W-BEAM GUARDRAIL END SECTION, 12 Go.	SF1303
C	1	POST 1 - TOP (6" X 6" X 1/8" TUBE)	MTPHP1A
D	1	POST 1 - BOTTOM (6' W6X15)	MTPHP1B
E	1	POST 2 - ASSEMBLY TOP	UHP2A
F	1	POST 2 - ASSEMBLY BOTTOM (6' W6X9)	HP2B
G	1	BEARING PLATE	E750
H	1	CABLE ANCHOR BOX	S760
J	1	BCT CABLE ANCHOR ASSEMBLY	E770
K	1	GROUND STRUT	MS785
L	6	W6X9 OR W6X8.5 STEEL POST	P621
M	6	COMPOSITE BLOCKOUTS	CBSP-14
N	1	W-BEAM MGS RAIL SECTION (9'-4 1/2")	G12025
O	2	W-BEAM MGS RAIL SECTION (12'-6")	G1203A
P	6	WOOD BLOCKOUT 6" X 8" X 14"	P675
Q	1	W-BEAM MGS RAIL SECTION (25'-0")	G1209
SMALL HARDWARE			
o	2	3/8" x 1" HEX BOLT (GRD 5)	B5160104A
b	4	3/8" WASHER	W0516
c	2	3/8" HEX NUT	N0516
d	25	3/8" Dia. x 1 1/4" SPLICE BOLT (POST 2)	B580122
e	2	3/8" Dia. x 9" HEX BOLT (GRD A449)	B580904A
f	3	3/8" WASHER	W050
g	33	3/8" Dia. H.G.R NUT	N050
h	1	3/4" Dia. x 8 1/2" HEX BOLT (GRD A449)	B340854A
j	1	3/4" Dia. HEX NUT	N030
k	2	1 ANCHOR CABLE HEX NUT	N100
l	2	1 ANCHOR CABLE WASHER	W100
m	8	1/2" x 1 1/4" A325 BOLT WITH CAPTIVE WASHER	SB12A
n	8	1/2" STRUCTURAL NUTS	N012A
o	8	1 1/8" O.D. x 3/8" I.D. STRUCTURAL WASHERS	W012A
p	1	BEARING PLATE RETAINER TIE	CT-100ST
q	6	3/8" x 10" H.G.R. BOLT	B581002
r	1	OBJECT MARKER 18" X 18"	E3151

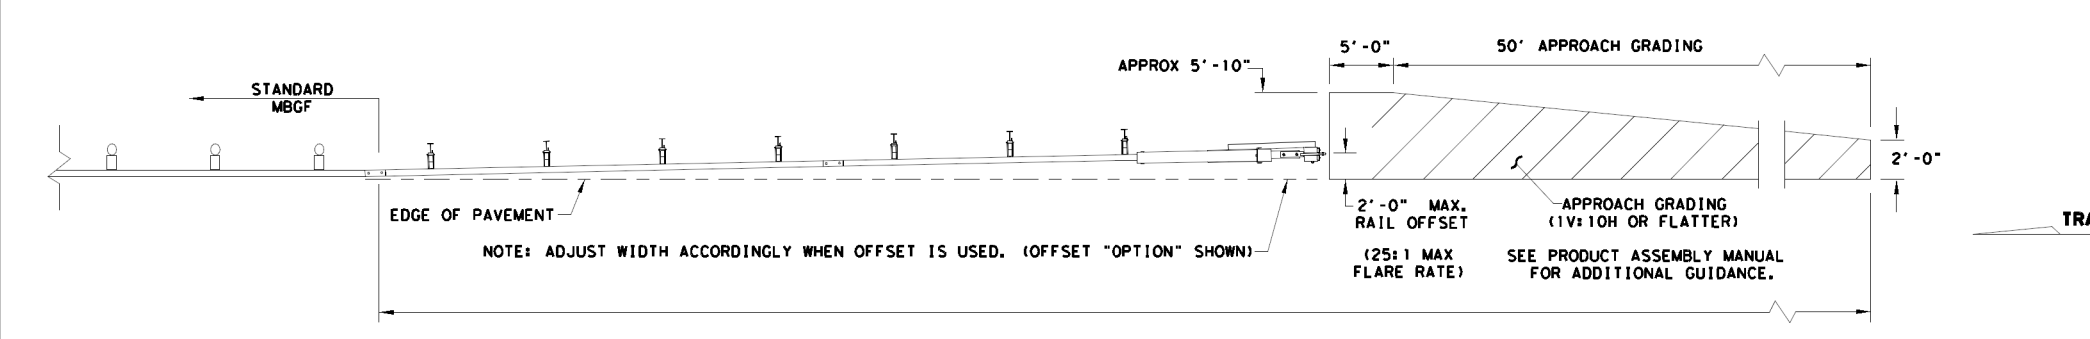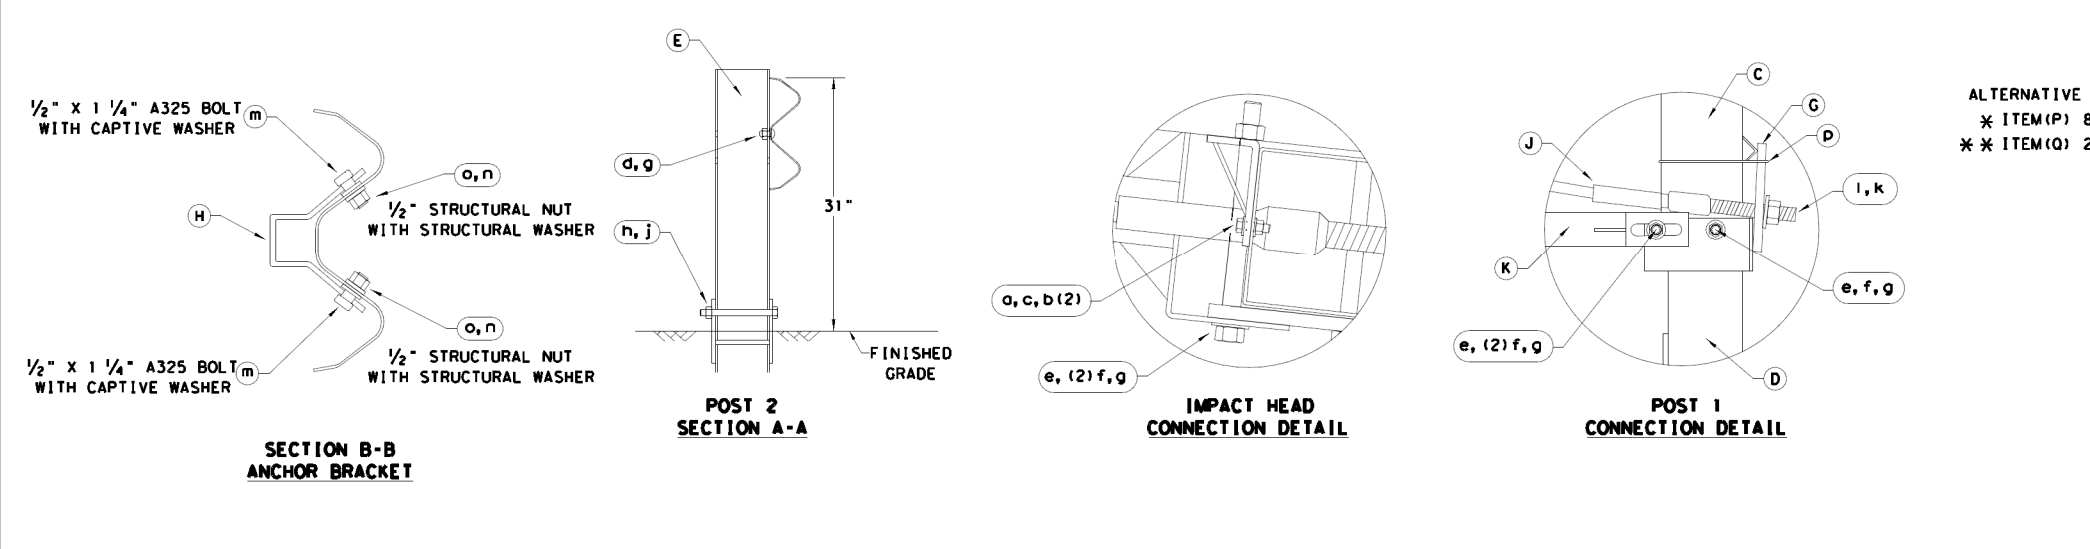

NOTE: TXDOT GENERIC APPROACH GRADING LAYOUT USED FOR ALL TANGENT TYPE END TREATMENTS.

NOTE: THIS STANDARD IS A BASIC REPRESENTATION OF THE MSKT END TERMINAL, IT IS NOT INTENDED TO REPLACE THE PRODUCT DESCRIPTION ASSEMBLY MANUAL.

Design Division Standard

## SINGLE GUARDRAIL TERMINAL


### MSKT-MASH-TL-3

### SGT (12S) 31-18


FILE: sgt12s3118.dgn	DN: TXDOT	CK: KM	DW: VP	CK: CL
© TXDOT: APRIL 2018	CONT	SECT	JOB	HIGHWAY
REVISIONS	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		66	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 11/1/2023  
 FILE: pw://txdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/3. Roadway/CCCG-22.dgn

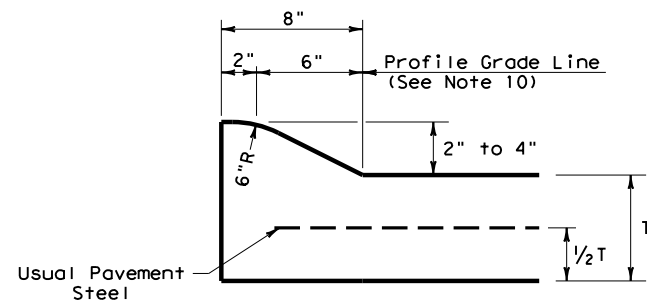


**TYPE I CURB (MONOLITHIC)**  
 2" - 4" HEIGHT

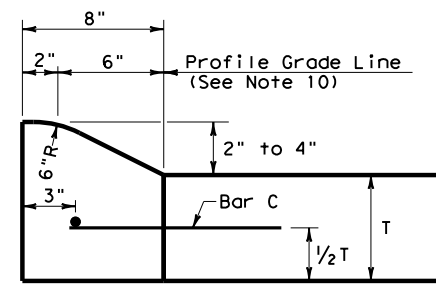


**TYPE I CURB**  
 2" - 4" HEIGHT

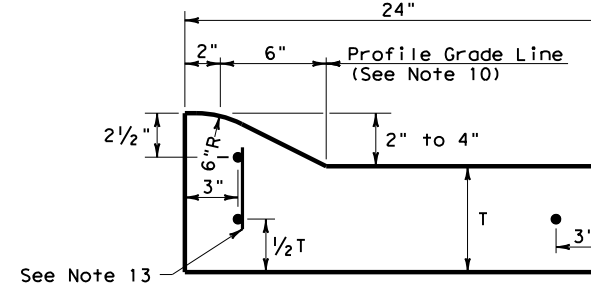


**TYPE I CURB AND GUTTER**  
 2" - 4" HEIGHT

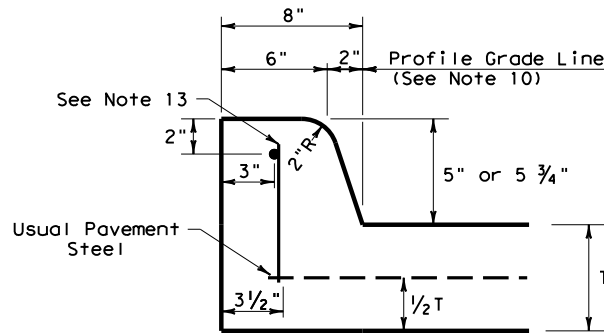


**TYPE II CURB (MONOLITHIC)**  
 5" - 5 3/4" HEIGHT

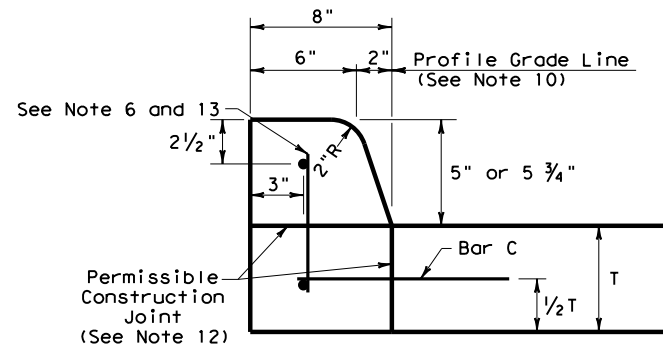


**TYPE II CURB**  
 5" - 5 3/4" HEIGHT

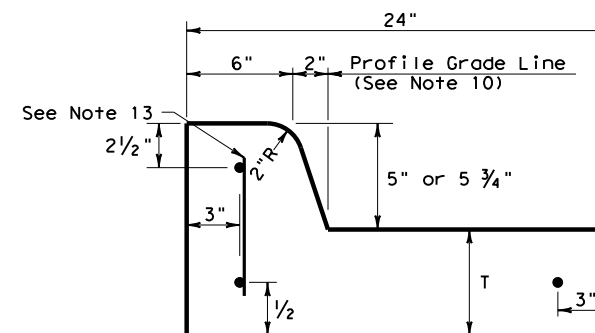


**TYPE II CURB AND GUTTER**  
 5" - 5 3/4" HEIGHT

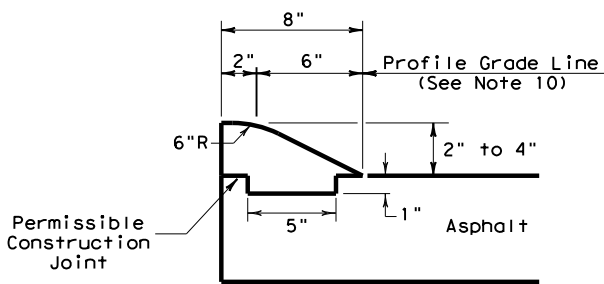


**TYPE III CURB (KEYED)**  
 2" - 4" HEIGHT

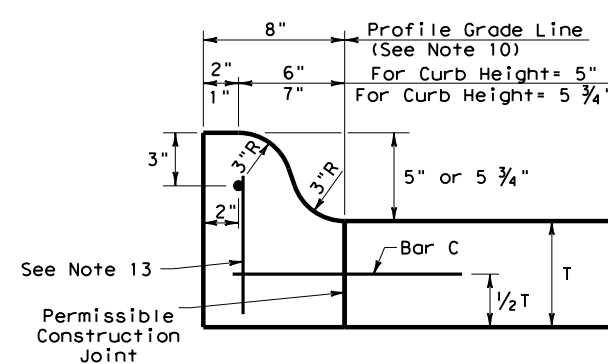


**TYPE IIa CURB**  
 5" - 5 3/4" HEIGHT

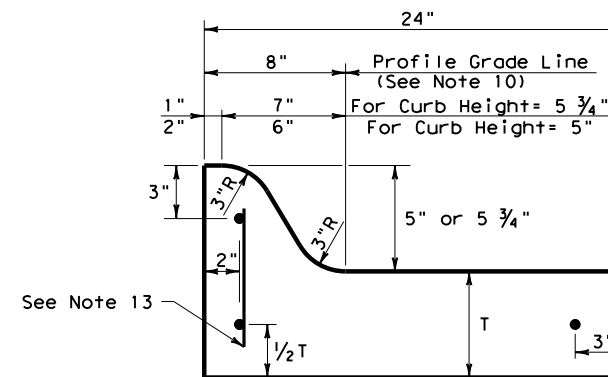


**TYPE IIa CURB AND GUTTER**  
 5" - 5 3/4" HEIGHT

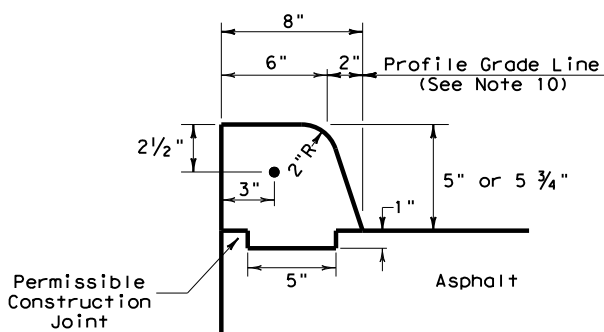

**TYPE IV CURB (KEYED)**  
 5" - 5 3/4" HEIGHT

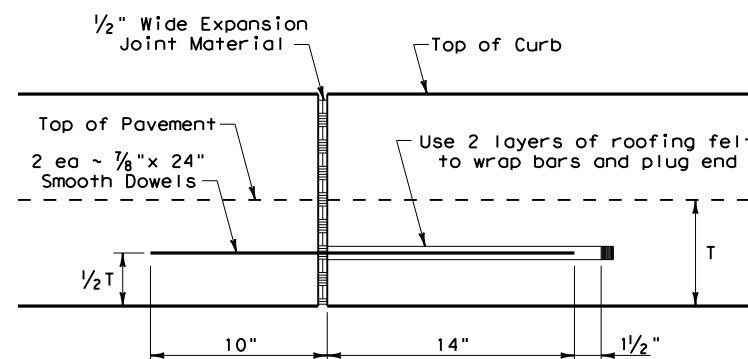

**EXPANSION JOINT DETAIL**

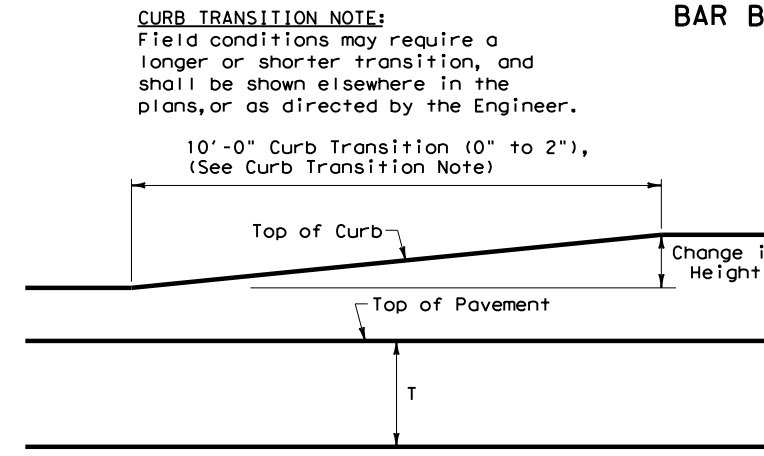


**CURB TRANSITION**

Note: To be paid for as Highest Curb

**GENERAL NOTES**


- All materials and construction shall be in accordance with Item 529, "Concrete Curb, Gutter, and Combined Curb and Gutter."
- Concrete shall be Class A.
- When reinforcing bars are used, they shall be No.4 unless otherwise shown. The use of fiber reinforced concrete in lieu of reinforcing steel is acceptable. Use fibers meeting the requirements of DMS 4550, "Fibers for Concrete," and dose fibers in accordance with Material Producers List (MPL) "Fibers for Class A and B Concrete Applications."
- Round exposed sharp edges with a rounding tool, to a minimum radius of 1/4 inch.
- All existing curbs and driveways to be removed shall be sawed or removed at existing joints.
- Where concrete curb is to be placed on existing concrete pavement, Bar B may be drilled and grouted in place, or may be inserted into fresh concrete.
- Expansion and contraction joints shall be constructed to match pavement joints in all curbs and curb and gutter adjacent to jointed concrete pavement. Where placement of curb or curb and gutter is not adjacent to concrete pavement, expansion joints shall be provided at structures, curb returns at streets, and at locations directed by The Engineer.
- Vertical and horizontal dowel bars and transverse reinforcing bars shall be placed at four feet C-C.
- Dimension 'T' shown is the thickness of concrete pavement. When curb is installed adjacent to flexible pavement dimension 'T' is 8" maximum.
- Usual profile grade line. Refer to typical sections and plan-profile sheets for exact locations.
- One-half inch expansion joint material shall be provided where curb or curb and gutter is adjacent to sidewalk or riprap.
- When horizontal permissible construction joints are used, the longitudinal pavement steel shall be placed in accordance with pavement details shown elsewhere in the plans. Reinforcing steel for curb section shall then conform to that required for concrete curb.
- Bar B placement as needed (typically at four ft. C-C) to support curb reinforcing steel during concrete placement.

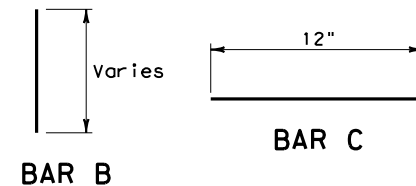

**CURB TRANSITION NOTE:**  
 Field conditions may require a longer or shorter transition, and shall be shown elsewhere in the plans, or as directed by the Engineer.


		<b>Design Division Standard</b>	
<b>CONCRETE CURB AND GUTTER</b>			
<b>CCCG-22</b>			
FILE: cccg21.dgn	DN: TXDOT	CK: AN	DW: CS
© TXDOT: JUNE 2022	CONT: 0156	SECT: 12	JOB: 020
REVISIONS		HIGHWAY: SS 447	
DIST: WFS	COUNTY: WICHITA	SHEET NO. 67	

DATE: 11/1/2023 7:13:00 AM  
 FILE: \\txdot.projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\7. Bridge\WD-CSBJ-22.dgn

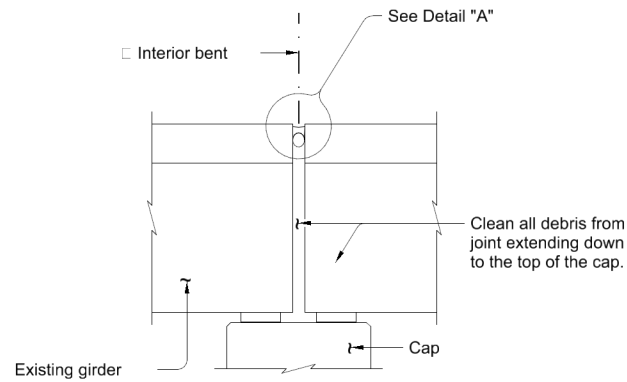


**JOINT WITH SILICONE SEAL**

(Used without ACP overlay)

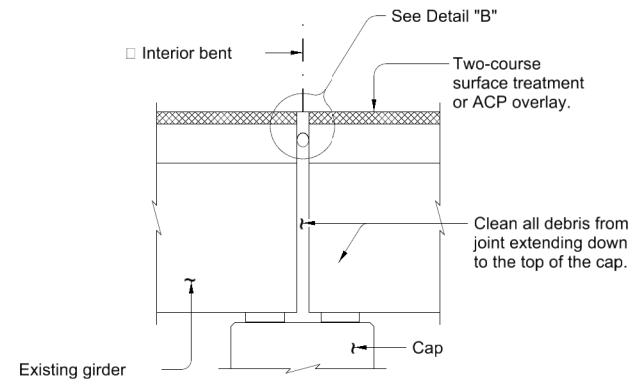


**JOINT W/ HOT-POURED RUBBER SEAL**

(Used with ACP overlay)

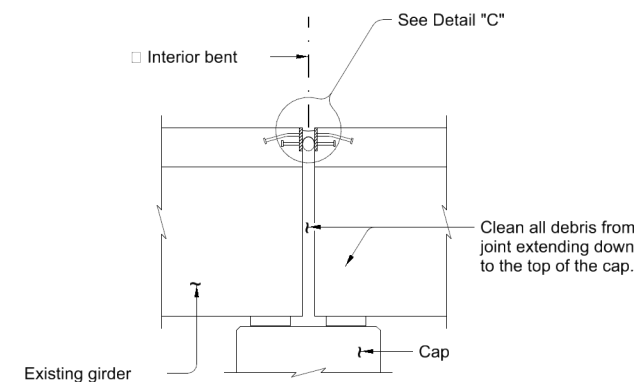


**ARMOR JOINT**


(Shown without ACP overlay. Armor joint with ACP overlay similar.)

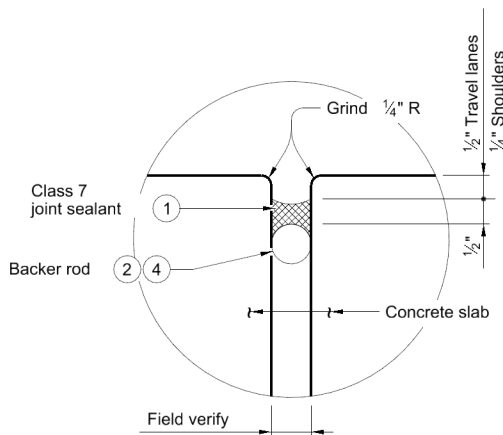

**DETAIL "A"**

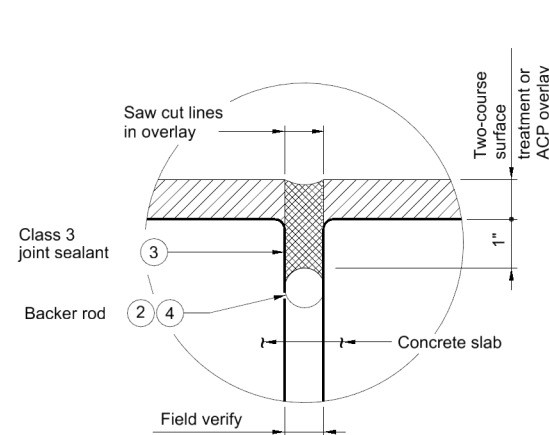

**DETAIL "B"**

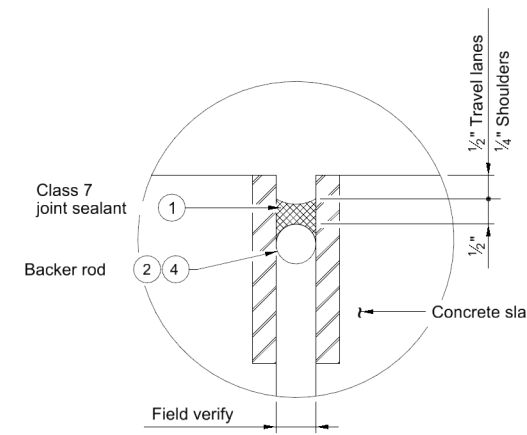

**DETAIL "C"**

(Stud anchors not shown for clarity.)


- 1 Use Class 7 joint sealant in accordance with DMS-6310, "Joint Sealants and Fillers." Prepare joint and seal in accordance with Item 438 "Cleaning and Sealing Joints."
- 2 Provide backer rod 25% larger than joint opening and compatible with the sealant. Use of multiple pieces to create a backer rod cross section is not permitted. Top of backer rod must be convex as shown.

**GENERAL NOTES:**

Cleaning existing joint opening (full depth) of all debris, providing and placing backer rod, saw-cutting asphalt overlay, and sealing joint is paid for by Item 438, "Cleaning and Sealing Joints" and measured by the linear foot. Obtain approval for all tools, equipment, materials and techniques proposed to clean and seal the joint. Provide Class 3 joint sealant in accordance with DMS-6310, "Joint Sealants and Fillers" for joints in asphalt overlay. Provide Class 7 joint sealant in accordance with DMS-6310, "Joint Sealants and Fillers" for joints in concrete. Extend sealant up into rail or curb 3 inches on low side or sides of deck. If the Class 7 joint sealant cannot be effectively placed in the vertical position, a Class 4 joint sealant compatible with the Class 7 joint sealant is allowed for the extension of the seal into the curb or rail. Prepare surfaces where sealant is to be placed in accordance with Manufacturer's specifications.

SHEET 1 OF 3

<span style="font-weight: bold; font-size: small;">Texas Department of Transportation</span>		Bridge Division	
CLEANING AND SEALING EXISTING BRIDGE JOINTS			
NBI: 03-243-0-0156-12-067 NBI: 03-243-0-0156-12-068 NBI: 03-243-0-0156-12-069 NBI: 03-243-0-0156-12-070 NBI: 03-243-0-0156-12-071 NBI: 03-243-0-0156-12-072			
FILE:	WD-CSBJ-22.dgn	DN:	CK:
C:\TXDOT	August 2022	CONT SECT:	JOB HIGHWAY
REVISIONS	0156 12	020	SS 447
DIST:	WFS	COUNTY:	WICHITA
SHEET NO.:	68		



*Bryson Lawrence, P.E.*

03/26/2024

**PROCEDURE FOR CLEANING AND SEALING EXISTING JOINT WITH SILICONE SEAL:**

- 1) Clean joint opening of all existing expansion materials/devices, dirt, and all other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints." Clean joint out full depth of the joint.
- 2) Obtain approval of cleaned joint prior to proceeding with joint sealing operation.
- 3) Place backer rod into joint opening 1" below the top of concrete. When sealing joints for slab spans, slab beam spans, or box beam spans, fill void below backer rod with extruded polystyrene foam before placing backer rod.
- 4) Seal the joint opening with a Class 7 joint sealant. Recess seal 1/2" below top of concrete in travel lanes and 1/4" below top of concrete in shoulders.


**PROCEDURE FOR CLEANING AND SEALING EXISTING JOINT WITH HOT-POURED RUBBER SEAL:**

- 1) Saw cut through the asphalt at the centerline of joint. Make multiple saw cuts to create a 1/2" minimum joint opening or match the existing joint opening. Clean joint opening of all old expansion materials/devices, bituminous materials, dirt, grease and all other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints." Clean joint out full depth of the joint.
- 2) Obtain approval of cleaned joint prior to proceeding with joint sealing operation.
- 3) Place backer rod into joint opening 1" below the top of concrete. When sealing joints for slab spans, slab beam spans, or box beam spans, fill void below backer rod with extruded polystyrene foam before placing backer rod.
- 4) Seal the joint opening with a Class 3 joint sealant. Seal flush to the top of the asphaltic concrete pavement.

**PROCEDURE FOR CLEANING AND SEALING EXISTING ARMOR JOINTS:**


- 1) Remove existing seal, if present. Clean joint opening of all dirt and other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints." Clean joint out full depth of the joint.
- 2) Abrasive blast clean existing steel surface where silicone seal is to be placed.
- 3) Obtain approval of cleaned joint prior to proceeding with joint sealing operation.
- 4) Place backer rod into joint opening 1" below the top of concrete. When sealing joints for slab spans, slab beam spans, or box beam spans, fill void below backer rod with extruded polystyrene foam before placing backer rod.
- 5) Seal the joint opening with a Class 7 joint sealant. Recess seal 1/2" below top of concrete in travel lanes and 1/4" below top of concrete in shoulders.

DATE: 11/1/2023 7:13:05 AM  
 FILE: P:\dot\project\wiseonline.com\TXDOT\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\7. Bridge\WD-CSBJ-22.dgn

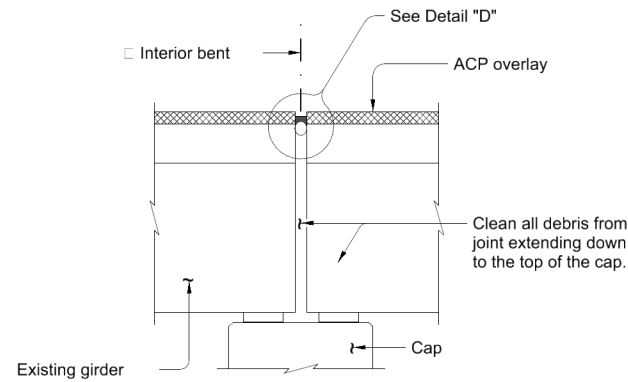


**HEADER JOINT WITH SILICONE SEAL**

(used with ACP overlay with joints more than 100 ft apart)

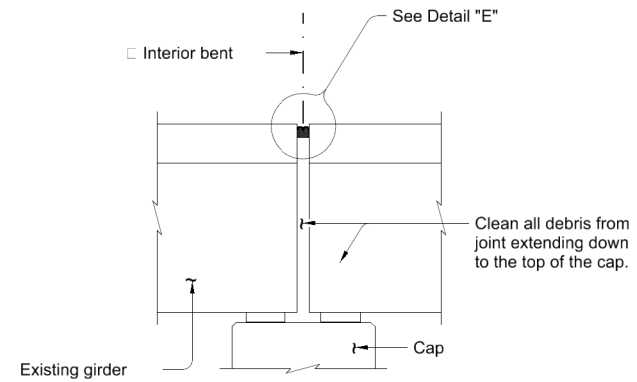


**JOINT WITH PRECOMPRESSED FOAM AND SILICONE SEAL**


(used without ACP overlay)

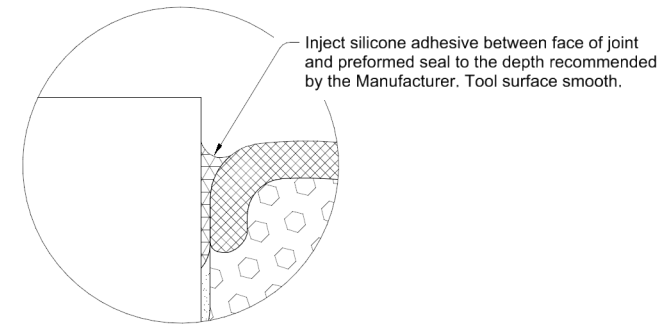

**SILICONE INJECTION**

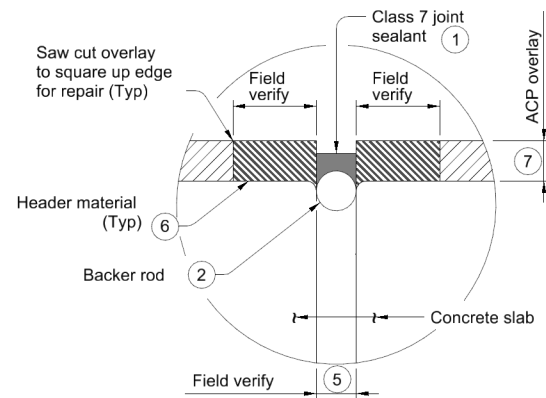

**DETAIL "D"**

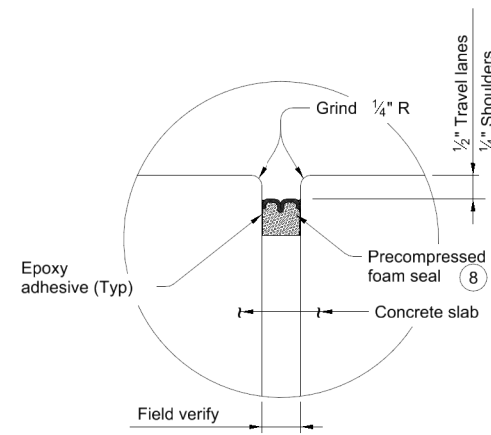

**DETAIL "E"**


**PROCEDURE FOR CLEANING AND SEALING HEADER JOINT WITH SILICONE SEAL AND HEADER JOINT REPAIR**

- 1) Clean joint opening of all old expansion materials/devices, dirt, and all other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints."
- 2) Saw cut and remove damaged portions of existing header material to neat lines. Repair deck joint spalls greater than 2" deep in accordance with Item 785, "Bridge Joint Repair or Replacement." Shallower spalls may be filled with header material.
- 3) Clean the voided region of all materials that could inhibit the bond between header material and concrete or steel.
- 4) Form the joint opening to the required width and place header material to fill voided region. Repair header material in accordance with Item 785, "Bridge Joint Repair or Replacement."
- 5) Place backer rod into joint opening 1" below the top of header material. When sealing joints for slab spans, slab beam spans, or box beam spans, fill void below backer rod with extruded polystyrene foam before placing backer rod.
- 6) Seal the joint opening with a Class 7 joint sealant. Recess seal 1/2" below top of header in travel lanes and 1/4" below top of header in shoulders.

**PROCEDURE FOR CLEANING AND SEALING JOINT WITH PRECOMPRESSED FOAM AND SILICONE SEAL**

- 1) Clean joint opening of all old expansion materials/devices, dirt, and all other deleterious materials in accordance with Item 438, "Cleaning and Sealing Joints." When sealing joints for slab spans, slab beam spans, pan girder spans, or box beam spans, fill void below proposed seal with extruded polystyrene foam.
- 2) Correctly size joint seal based on field measurement and in accordance with Manufacturer's specifications. Multiple seal widths may be required. Ensure proper seal is selected for each joint.
- 3) Abrasive blast clean existing joint surfaces where seal is to be applied.
- 4) Wipe down joint surfaces to remove contaminants.
- 5) Mask areas adjacent to joint opening sufficiently to keep epoxy off deck surface.
- 6) Apply epoxy to joint opening side surfaces.
- 7) While epoxy is still tacky, remove shrink wrap from seal and install in joint opening.
- 8) Recess top of joint seal 1/2" in travel lanes and 1/4" in shoulders.
- 9) Inject silicone adhesive along top interface of seal with joint side surface according to Manufacturer's recommendations. Tool to spread adhesive as necessary. See Silicone Injection detail.

- 1) Use Class 7 joint sealant in accordance with DMS-6310, "Joint Sealants and Fillers." Prepare joint and seal in accordance with Item 438 "Cleaning and Sealing Joints."
- 2) Provide backer rod 25% larger than joint opening and compatible with the sealant. Use of multiple pieces to create a backer rod cross section is not permitted. Top of backer rod must be convex as shown.
- 5) Match existing joint opening or set at a minimum:
  - a. 1" at 70°F when the distance between joints is 150 ft or less
  - b. 2" at 70°F when the distance between joints is greater than 150 ft.
  - c. As directed by the Engineer.
- 6) Cleaning and sealing existing header joints does not necessitate replacement of existing header material. If replacement of header material is necessary, as determined by the Engineer, use header material in accordance with DMS-6140, "Polymer Concrete for Bridge Joint Systems." Match the thickness of the header material with the thickness of the overlay as shown in the plans, but do not exceed 4". Place header material flush with roadway surface. Do not cantilever header material over the joint opening. Repair of header material will be paid for in accordance with Item 785-6006, "Bridge Joint Repair (Header)."
- 7) Maximum thickness is 4".
- 8) See table of Approved Precompressed Foam Seal Manufacturers on Sheet 3 of 3.



*Bryson Lawrence, P.E.*

03/26/2024

SHEET 2 OF 3


<b>CLEANING AND SEALING EXISTING BRIDGE JOINTS</b>			
NBI: 03-243-0-0156-12-067 NBI: 03-243-0-0156-12-068 NBI: 03-243-0-0156-12-069 NBI: 03-243-0-0156-12-070 NBI: 03-243-0-0156-12-071 NBI: 03-243-0-0156-12-072			
FILE:	WD-CSBJ-22.dgn	DN:	CK:
REVISIONS:	August 2022	CONT:	SECT:
		JOB:	HIGHWAY:
		DIST:	COUNTY:
		SHEET NO.:	
		<b>0156 12</b>	<b>020</b>
		<b>WFS</b>	<b>WICHITA</b>
			<b>69</b>

**APPROVED PRECOMPRESSED FOAM SEAL MANUFACTURERS**


MANUFACTURER	SEAL TYPE
Watson Bowman Acme	Wabo FS
SSI	Silspec SES
Sealtite	Sealtite 50N
EMSEAL	BEJS

**TABLE OF ESTIMATED QUANTITIES**


STRUCTURE NUMBER (FEATURE CROSSED)	JOINT TYPE	ITEM	DESCRIPTION	NUMBER OF JOINTS	QUANTITY (LF)
03-243-0-0156-12-067 HIGHWAY OVERPASS	CLASS 7	438-6004	CLEAN AND SEAL EXIST. JOINT	5	200
03-243-0-0156-12-068 HIGHWAY OVERPASS	CLASS 7	438-6004	CLEAN AND SEAL EXIST. JOINT	15	825
03-243-0-0156-12-069 RAILROAD OVERPASS	CLASS 7	438-6004	CLEAN AND SEAL EXIST. JOINT	7	243
03-243-0-0156-12-070 RAILROAD OVERPASS	CLASS 7	438-6004	CLEAN AND SEAL EXIST. JOINT	13	678
03-243-0-0156-12-071 HIGHWAY OVERPASS	CLASS 7	438-6004	CLEAN AND SEAL EXIST. JOINT	6	264
03-243-0-0156-12-072 HIGHWAY OVERPASS	CLASS 7	438-6004	CLEAN AND SEAL EXIST. JOINT	6	264

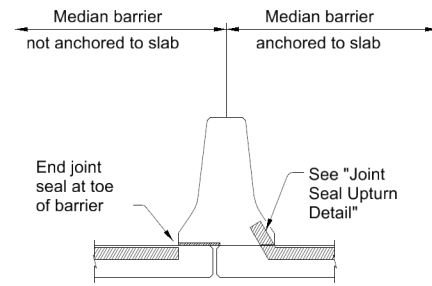


**WITH OPEN DECK JOINT BELOW MEDIAN BARRIER**




**AT CONCRETE TRAFFIC BARRIER**




**AT SIDEWALK BEHIND BRIDGE RAIL**

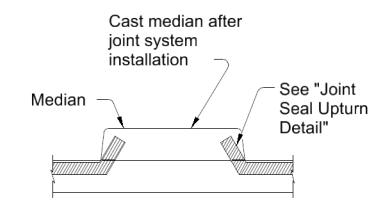


**AT RAISED MEDIAN**

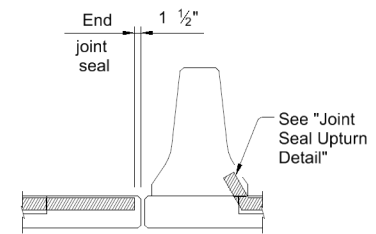


**WITH OPEN DECK JOINT ADJACENT TO MEDIAN BARRIER**



**AT CONCRETE BRIDGE RAIL**




**AT SIDEWALK**



**AT STEEL POST BRIDGE RAIL**


**JOINT SEALANT TERMINATION DETAILS**

9 1 1/2" for precompressed foam and silicone seal

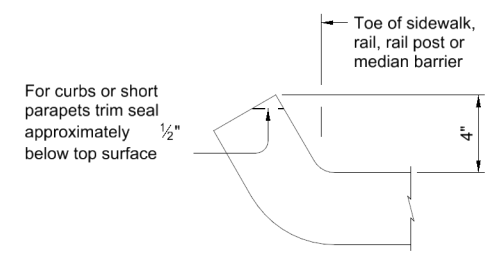

**JOINT SEAL UPTURN DETAIL**

DATE: 11/1/2023 7:13:10 AM FILE: \\txdot.projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\7. Bridge\WD-CSBJ-22.dgn






*Bryson Lawrence, P.E.*

03/26/2024



		Bridge Division	
<b>CLEANING AND SEALING EXISTING BRIDGE JOINTS</b>			
NBI: 03-243-0-0156-12-067 NBI: 03-243-0-0156-12-068 NBI: 03-243-0-0156-12-069 NBI: 03-243-0-0156-12-070 NBI: 03-243-0-0156-12-071 NBI: 03-243-0-0156-12-072			
FILE: WD-CSBJ-22.dgn	DN:	CK:	DW: CK:
©TxDOT August 2022	CONT	SECT	HIGHWAY
REVISIONS	<b>0156 12</b>	<b>020</b>	<b>SS 447</b>
DIST	COUNTY		SHEET NO.
<b>WFS</b>	<b>WICHITA</b>		<b>70</b>

DATE: 11/1/2023 7:13:16 AM  
 FILE: D:\wfs\design\projects\015612020\4 - Design\Plan Set\7. Bridge\bed14.dgn  
 DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

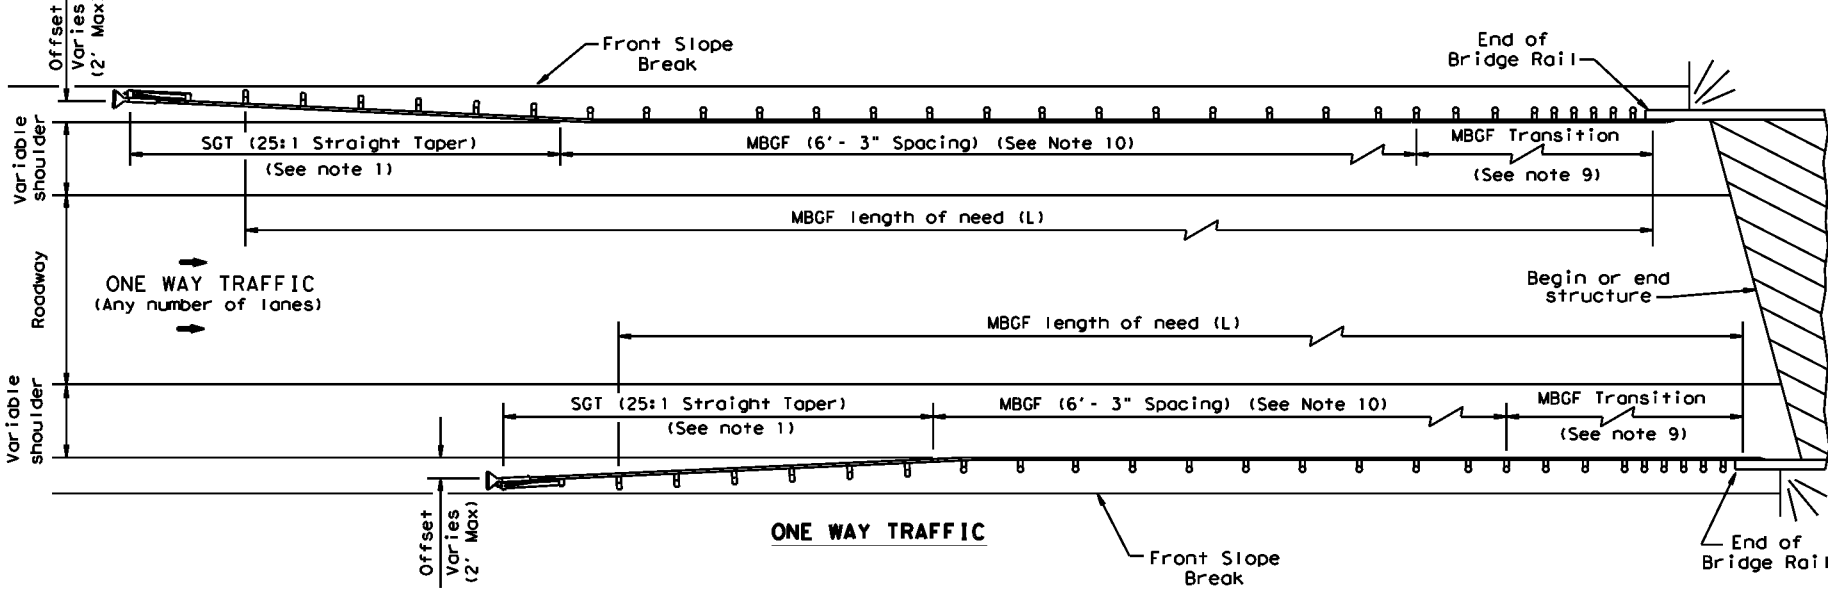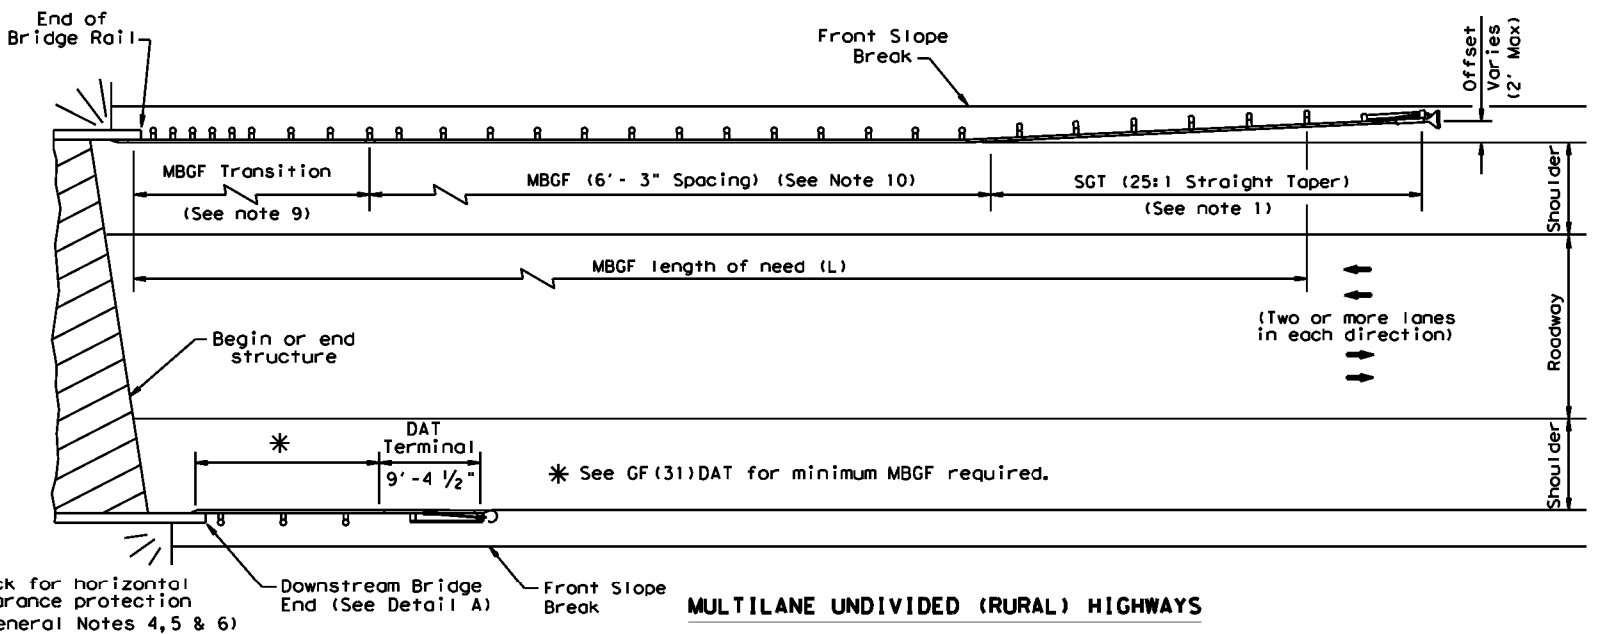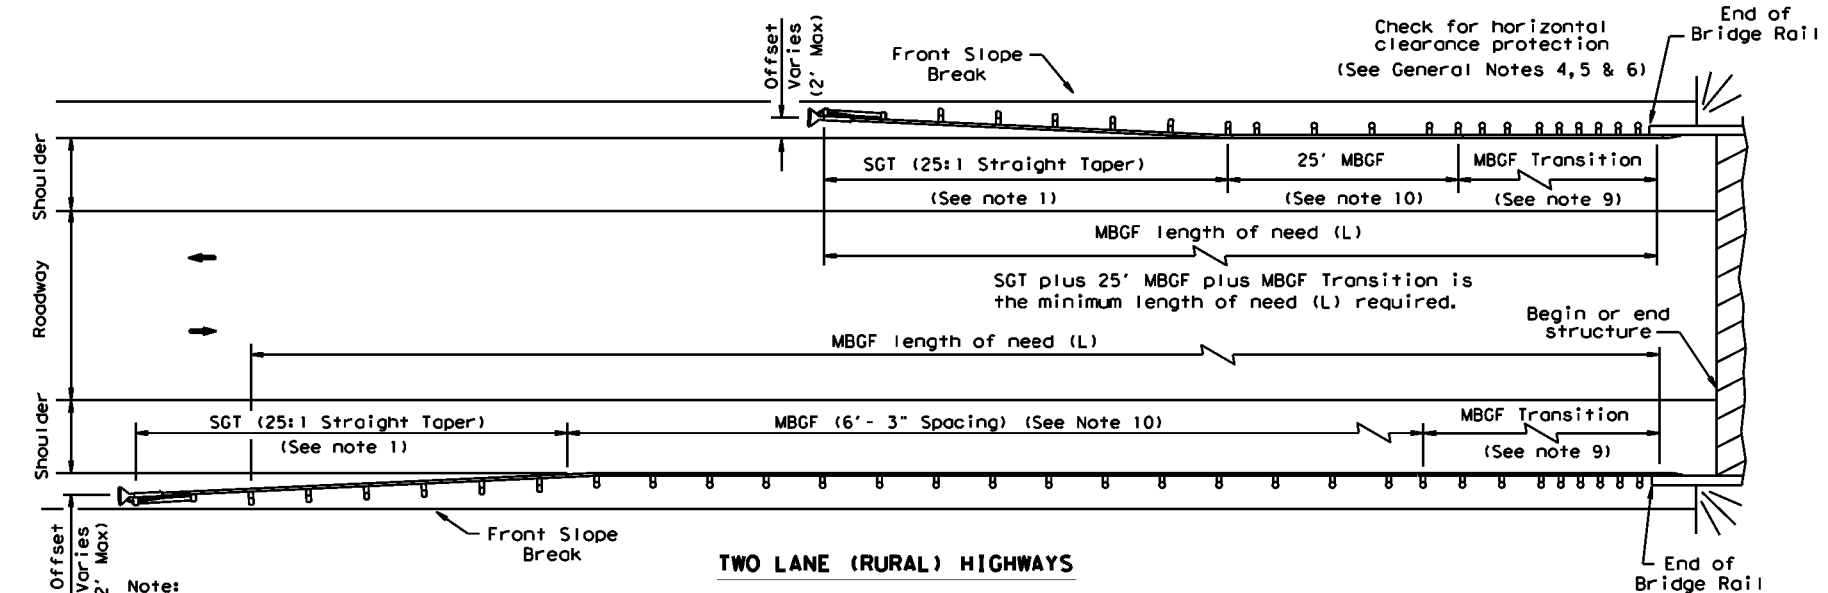

**GENERAL NOTES**

1. For more detail: See GF(31), SGT( )31, GF(31)TR, and GF(31)TL2 standard sheets.
2. Quantities of metal beam guard fence (MBGF) at individual bridge ends are as shown in the plans.
3. Use average daily traffic (ADT) for the current year to determine MBGF length of need in accordance with the Roadway Design Manual unless otherwise specified. Where significant traffic volume growth is anticipated on low volume (0-750 ADT) highways, use length determinations for the higher volume category.
4. MBGF may not be required to shield departure end of bridge unless other obstacles within the horizontal clearance limits or opposing traffic indicate a MBGF consideration.
5. Downstream anchor terminals (DAT) are only for downstream end anchorage use, outside the horizontal clearance area of opposing traffic.
6. Direct connection of MBGF to concrete rails are only for downstream rail connections outside the horizontal clearance area of opposing traffic. (This requires a minimum of three standard line posts plus the DAT terminal, See Detail A)
7. The crown shall be widened to accommodate MBGF. Typically the "front slope" break should be 2'-0" from the back of the MBGF post. This applies to new construction on new alignment or where existing roadway cross section is to be widened to increase roadway width. This does not apply to rehabilitation work where existing roadway crown width is to be retained (See Typical Cross Section at MBGF).
8. For restrictive bridge widths: The MBGF should be properly transitioned from the existing bridge rail to the adjoining MBGF (See MBGF Transition Standards). Metal beam guard fence at these bridge locations shall be flared at the rate of 25:1 or flatter, and be of the length necessary to locate the terminal end at the 2 ft. "maximum" offset from the shoulder edge in the approach direction.
9. Transition length and post spacing will vary depending on the transition type. Transition type will be shown elsewhere in the plans.
10. A minimum 25' length of MBGF will be required.

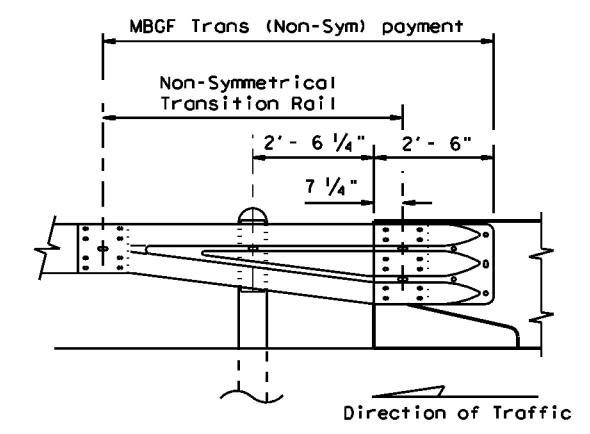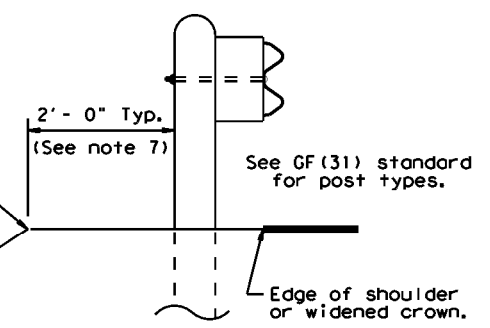


Note:  
All rail elements shall be lapped in the direction of adjacent traffic.


		Design Division Standard	
BRIDGE END DETAILS (METAL BEAM GUARD FENCE APPLICATIONS TO RIGID RAILS)			
BED-14			
FILE: bed14.dgn	DNR TxDOT	CR: AM	DNR BD/VP
© TxDOT: December 2011	CONT	SECT	JOB
REVISED APRIL 2014	015612	020	SS 447
SEE (MEMO 0414)	DIST	COUNTY	SHEET NO.
	WFS	WICHITA	71

DISCLAIMER: This standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. The use of this standard is for the conversion of this standard to other formats or for incorrect results or damages resulting from its use. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: 11/1/2023 7:33:21 AM  
 FILE: \\txdot.projectwiseonline.com:TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\7. Bridge\Plan Set\7. Bridge\RL - T202TR-19.dgn

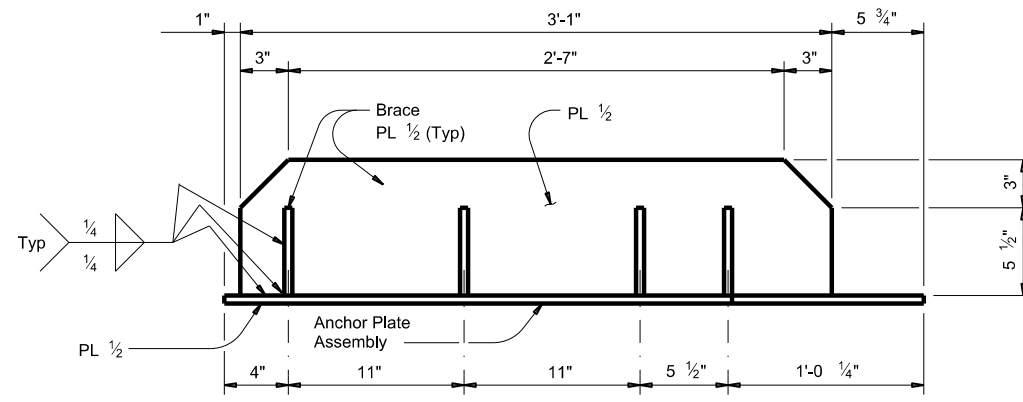

PLAN

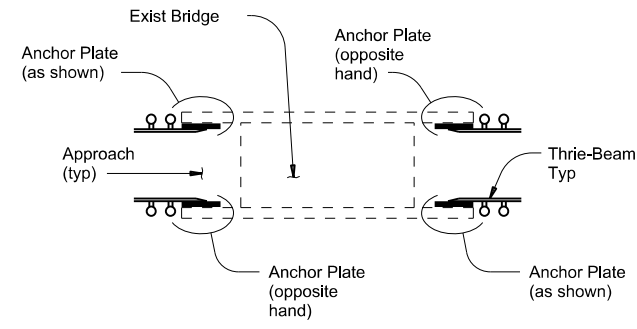

LOCATION DETAILS

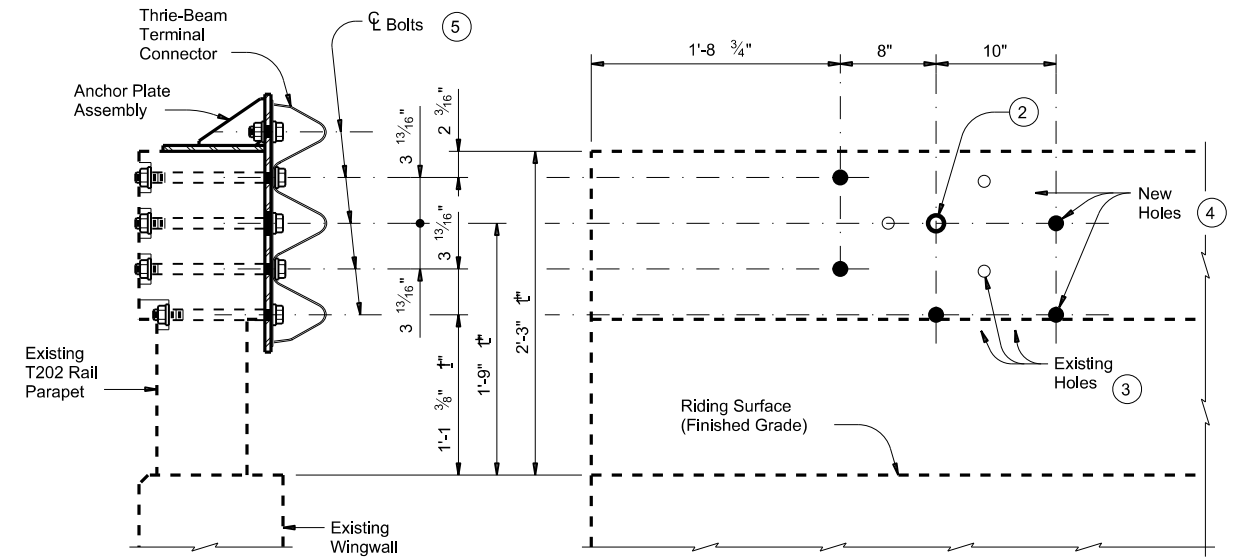


SECTION

ROADSIDE ELEVATION


Showing completed installation

Anchor Plate assembly and Thrie-Beam Terminal Connector not shown for clarity

DETAILS OF BOLTS AND HOLES

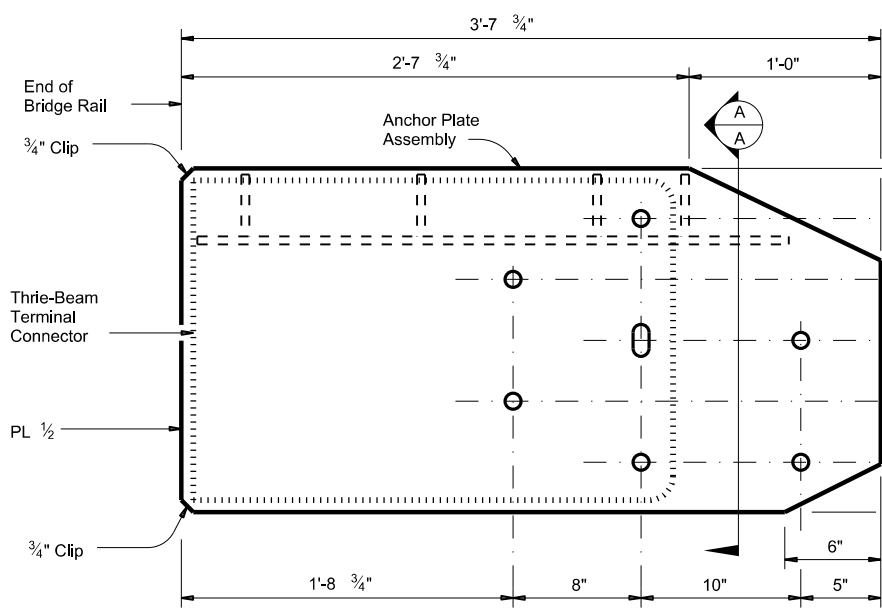


ROADSIDE ELEVATION

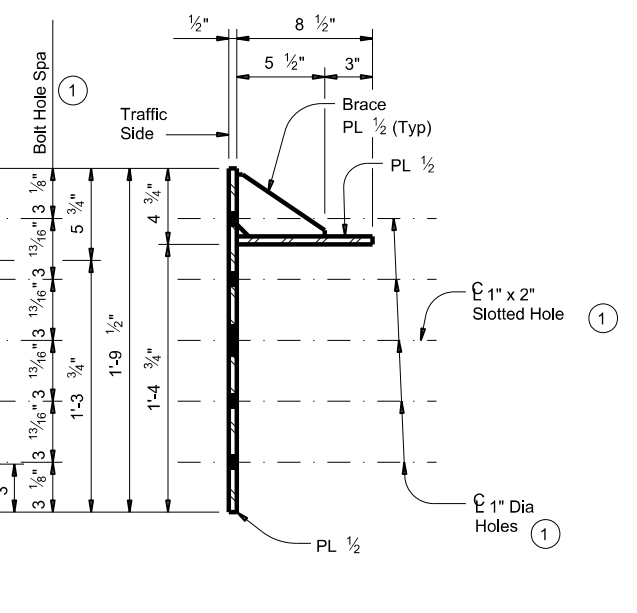

SECTION A-A

ANCHOR PLATE DETAILS


Anchor Plate shown is detailed for one end of one side of rail only. For other side, Anchor Plate must be built opposite hand.

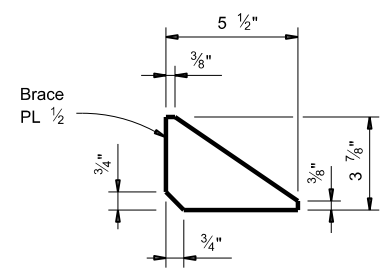

BRACE PLATE DETAILS

BRIDGE LOCATIONS

- BR# 03-243-0-0156-12-067 SS 447 & BNSF BRIDGE, NB MAIN LANES
- BR# 03-243-0-0156-12-068 SS 447 & BNSF BRIDGE, NB MAIN LANES
- BR# 03-243-0-0156-12-069 SS 447 & BNSF BRIDGE, SB MAIN LANES
- BR# 03-243-0-0156-12-070 SS 447 & BNSF BRIDGE, SB MAIN LANES
- BR# 03-243-0-0156-03-071 SS 447 & MLK JR BLVD, NB MAIN LANES
- BR# 03-243-0-0156-03-072 SS 447 & MLK JR BLVD, SB MAIN LANES

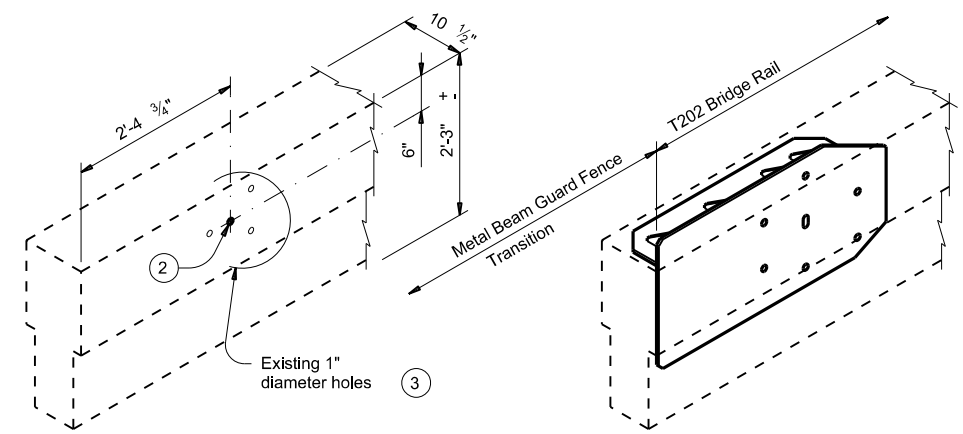


EXISTING PARAPET

Shown after removal of existing MBGF Transition connector and prior to coring new bolt holes

ANCHOR PLATE PLACEMENT

INSTALLATION DETAILS

- 1 The Contractor must verify that locations of bolt holes match those in the Thrie-Beam Terminal Connector to be installed in that location prior to fabrication of the Anchor Plate assembly and prior to coring bolt holes in the existing T202 parapet.
- 2 If the existing holes are aligned as expected, use the indicated existing 1" diameter hole in the installation of the Anchor Plate assembly and the Thrie-Beam Terminal Connector.
- 3 If the existing holes are not aligned as expected, holes that cannot be utilized in the installation and are within 3" of a new bolt hole must be filled with epoxy grout prior to coring new holes.
- 4 Drill new 1" diameter holes, each with a 2 1/2" diameter x 1" deep recess, through existing railing parapet. Recesses are only required when pedestrian sidewalks are adjacent to back of rail unless directed otherwise by the Engineer. Holes should be perpendicular to the roadside face of the parapet. Drill holes and recesses with coring type equipment. Percussion drilling is not allowed. Patch spalls, when directed by the Engineer, in accordance with Item 429, "Concrete Structure Repair", at the contractor's expense.
- 5 7 - 7/8" diameter ASTM F3125 Gr A325 Hex Head Anchor Bolts each with 2 - 1 3/4" O.D. washers. Place washer under each head and nut. Provide bolts of sufficient length to extend a minimum of 1/2" beyond nut. Cut excess bolt length and paint cut surface with zinc-rich paint if directed by the Engineer.

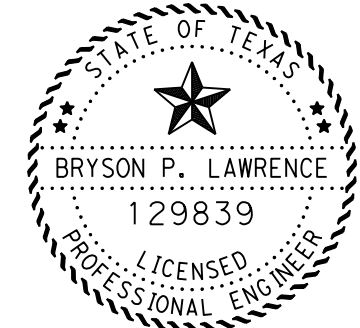

Bryson Lawrence, P.E.

03/26/2024

**CONSTRUCTION NOTES:**  
 Field verify dimensions before commencing work and ordering materials. On T202 rail remove any MBGF (W-beam) and attachment hardware, from the face of the rail if present, prior to the installation of new MBGF transition. Dispose of these materials as directed by the the Engineer. Plugging of newly exposed existing bolt holes is not necessary except as stated here in or otherwise indicated on the plans. This work is considered subsidiary to the pertinent bid items. Attach the MBGF Transition to the existing parapet using the Anchor Plate assembly and the Thrie-Beam Terminal Connection. Splice the Thrie-Beam Terminal Connection to the Thrie-Beam with the normal 12 connection bolts. Refer to Metal Beam Guard Fence Transition and Metal Beam Guard Fence detail sheets for additional details and information not shown herein.

**MATERIAL NOTES:**  
 Fabricate Anchor Plate assembly with steel conforming to either ASTM A36 or A572 Gr 50. Anchor Plate assembly must be free of burrs, sharp edges and weld splatter. Grind edges and corners to a 1/16" flat or radius. Hot-dip galvanize Anchor Plate assembly in accordance with Item 445, "Galvanizing." Anchor bolts, nuts, and washers must conform to Item 449, "Anchor Bolts."

**GENERAL NOTES:**  
 These details are for retrofitting existing rails only, not new construction, with a Thrie-Beam Terminal Connection. Shop drawings are not required for this installation. Payment for materials, fabrication, and installation of this assembly are to be included in unit price bid in accordance with Item 540 "Mtl Bm Gd Fen Trans (Anchor Plate)." Estimated weight of a single Anchor Plate assembly, including bolts, nuts, and washers, but not including the Thrie-Beam Terminal Connector = 190 Lbs.

		<b>Bridge Division Standard</b>	
<b>T202 TRANSITION RETROFIT GUIDE</b> (ONE TIME USE)			
<b>T202TR(MOD)</b>			
FILE:	DN: TxDOT	CK: TxDOT	DW: TxDOT
©TxDOT	September 2019	CON: 0156	SECT: 12
REVISIONS		JOB: 020	HIGHWAY: SS 447
		DIST: WFS	COUNTY: WICHITA
			SHEET NO.: 72




DATE: 3/27/2023 01:30:00 PM  
 FILE: p:\w\txdot\project\seonline.com\TXDOT\Documents\03 - WFS\Design Projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 STRIPING LAYOUT.dgn

CK: DW: CC: DN:



MATCHLINE SB STA. 544+00.00

MATCHLINE NB STA. 544+55.67



Bryson Lawrence, P.E.  
 03/26/2024





**SS 447**  
**STRIPE & SIGN LAYOUT**

© TxDOT 2024		SHEET 1 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	73	

CK:  
DW:  
CK:  
DN:

DATE: 3/27/2023 01:32:00 PM  
FILE: p:\projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 STRIPING LAYOUT.dgn

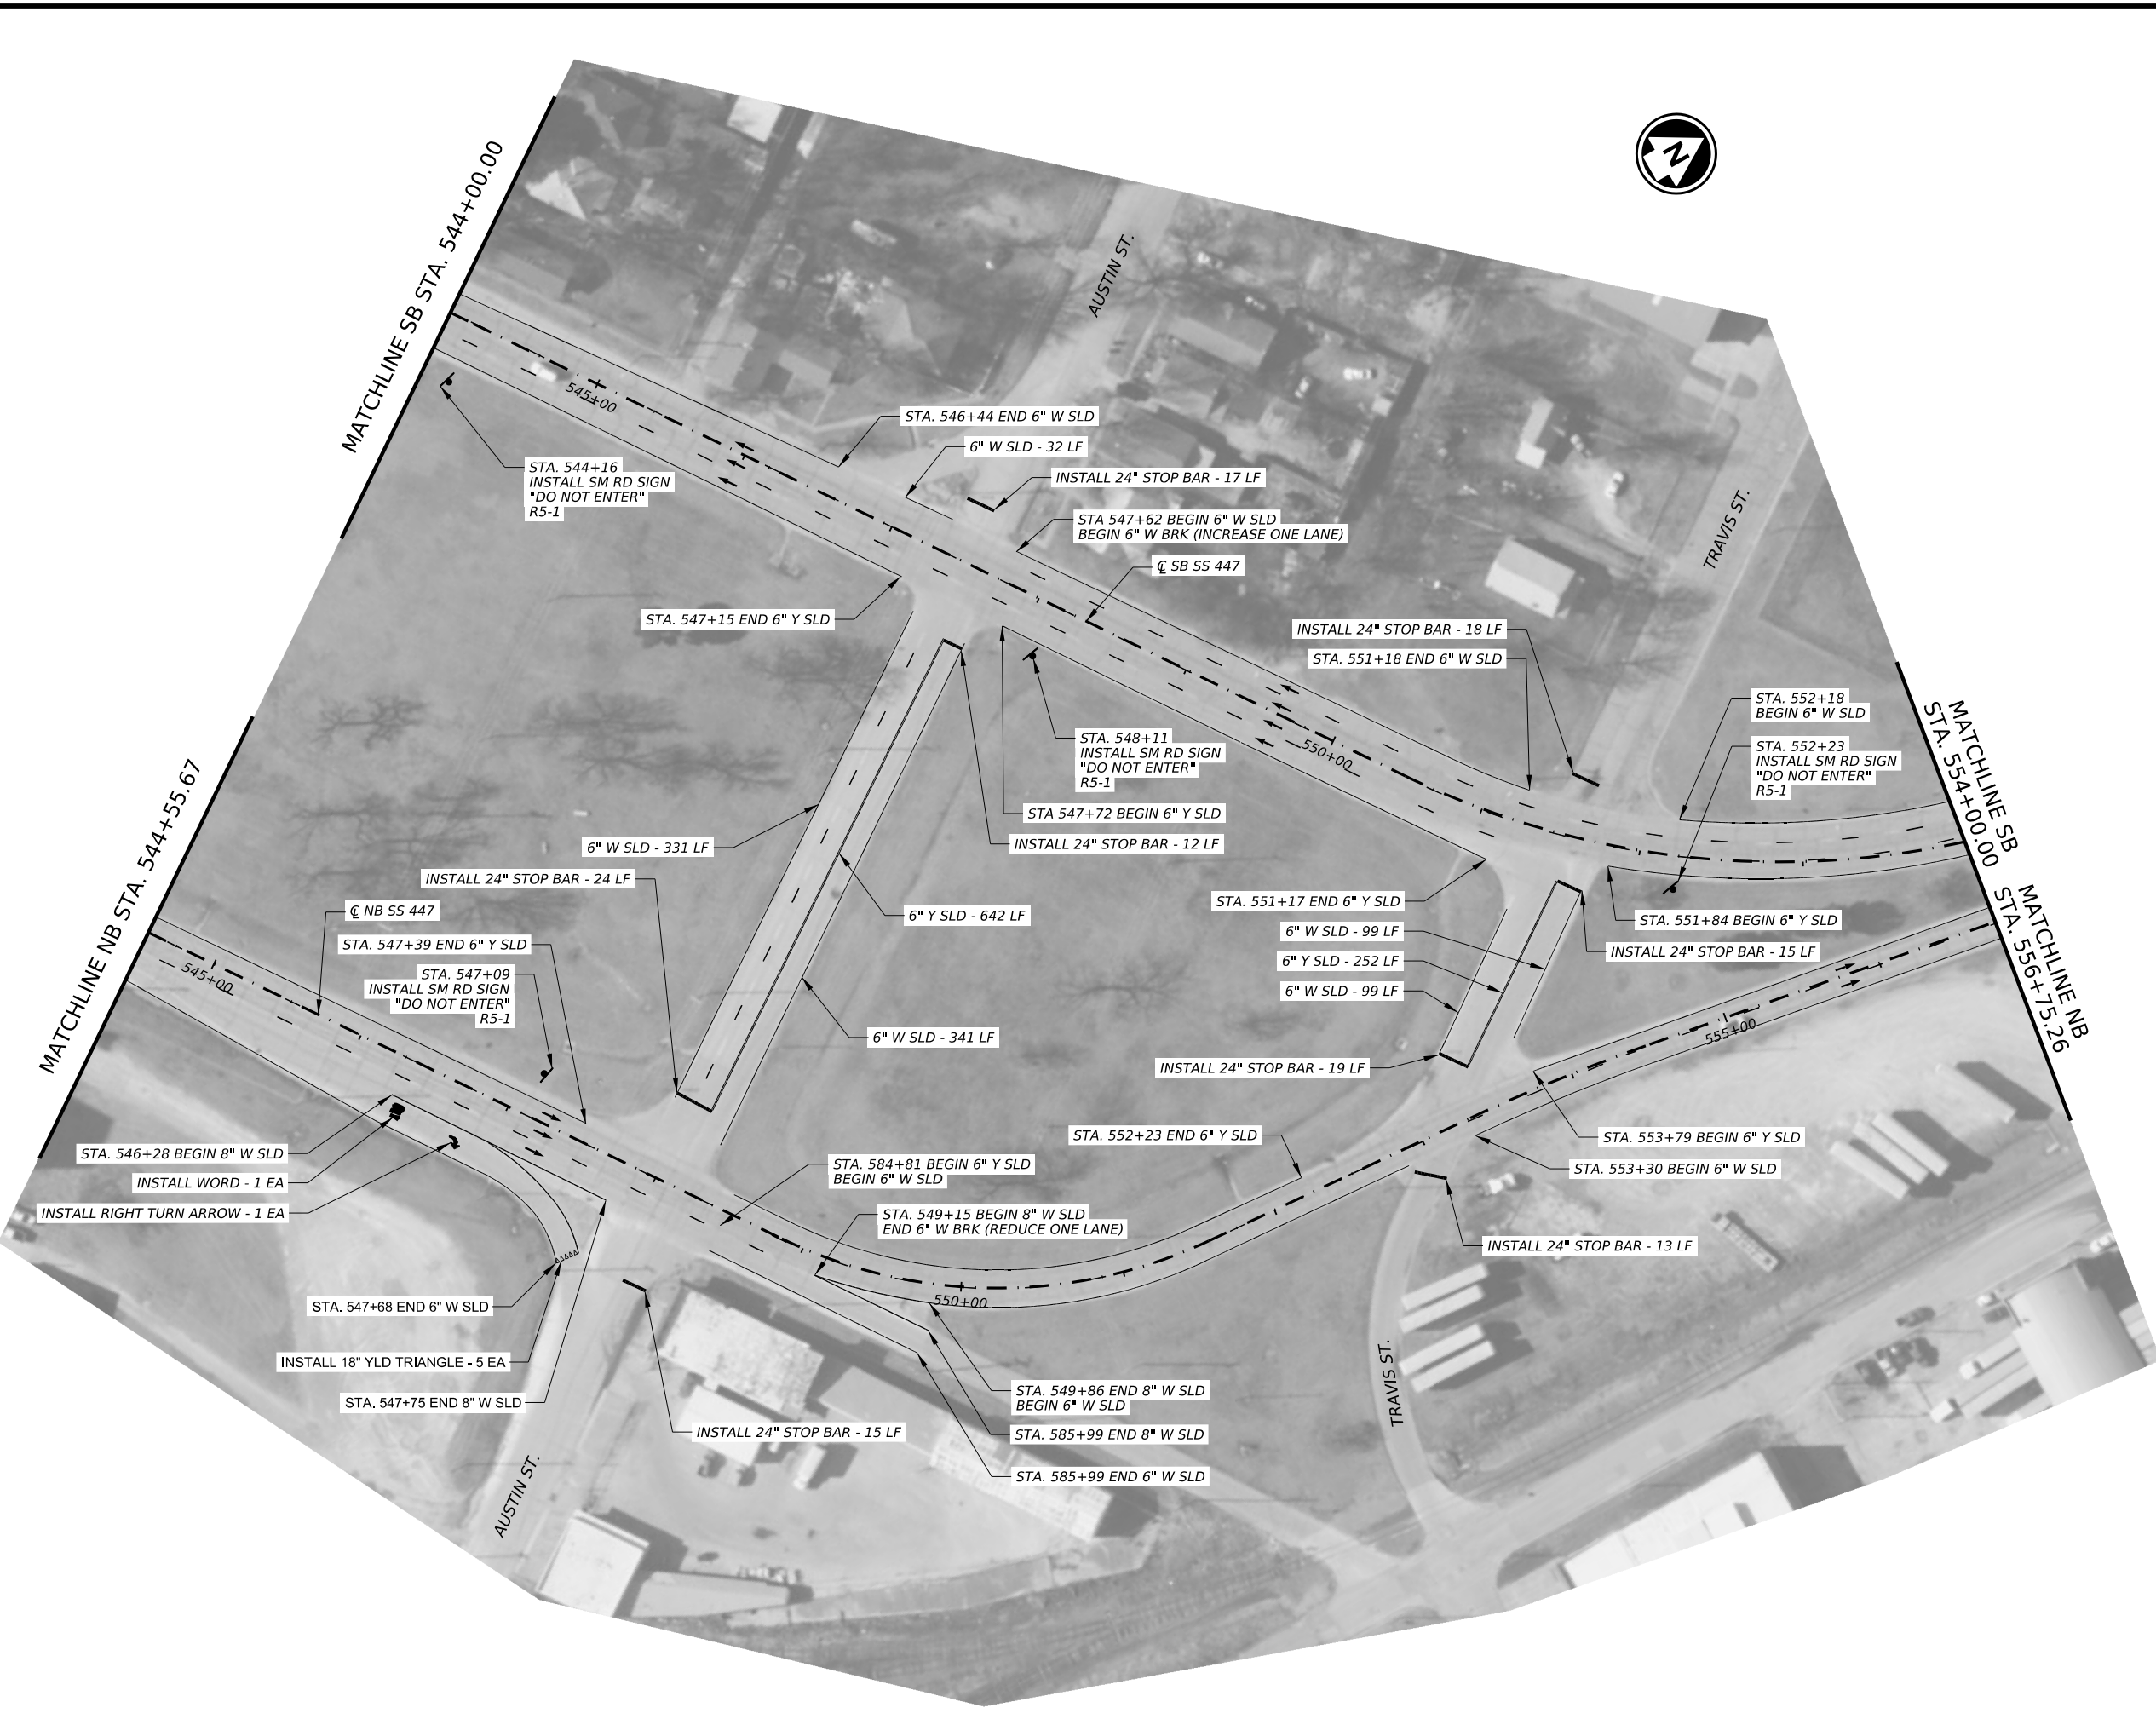

Bryson Lawrence, P.E.  
03/26/2024





SS 447  
STRIPE & SIGN LAYOUT

© TxDOT 2024		SHEET 2 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	74	

DATE: 3/27/2023 01:32:00 PM  
 FILE: p:\C\CL\BENTON\WIS\online.com\TXDOT\Documents\03 - WFS\Design Projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 STRIPING LAYOUT.dgn

CK: DW: CK: DW:

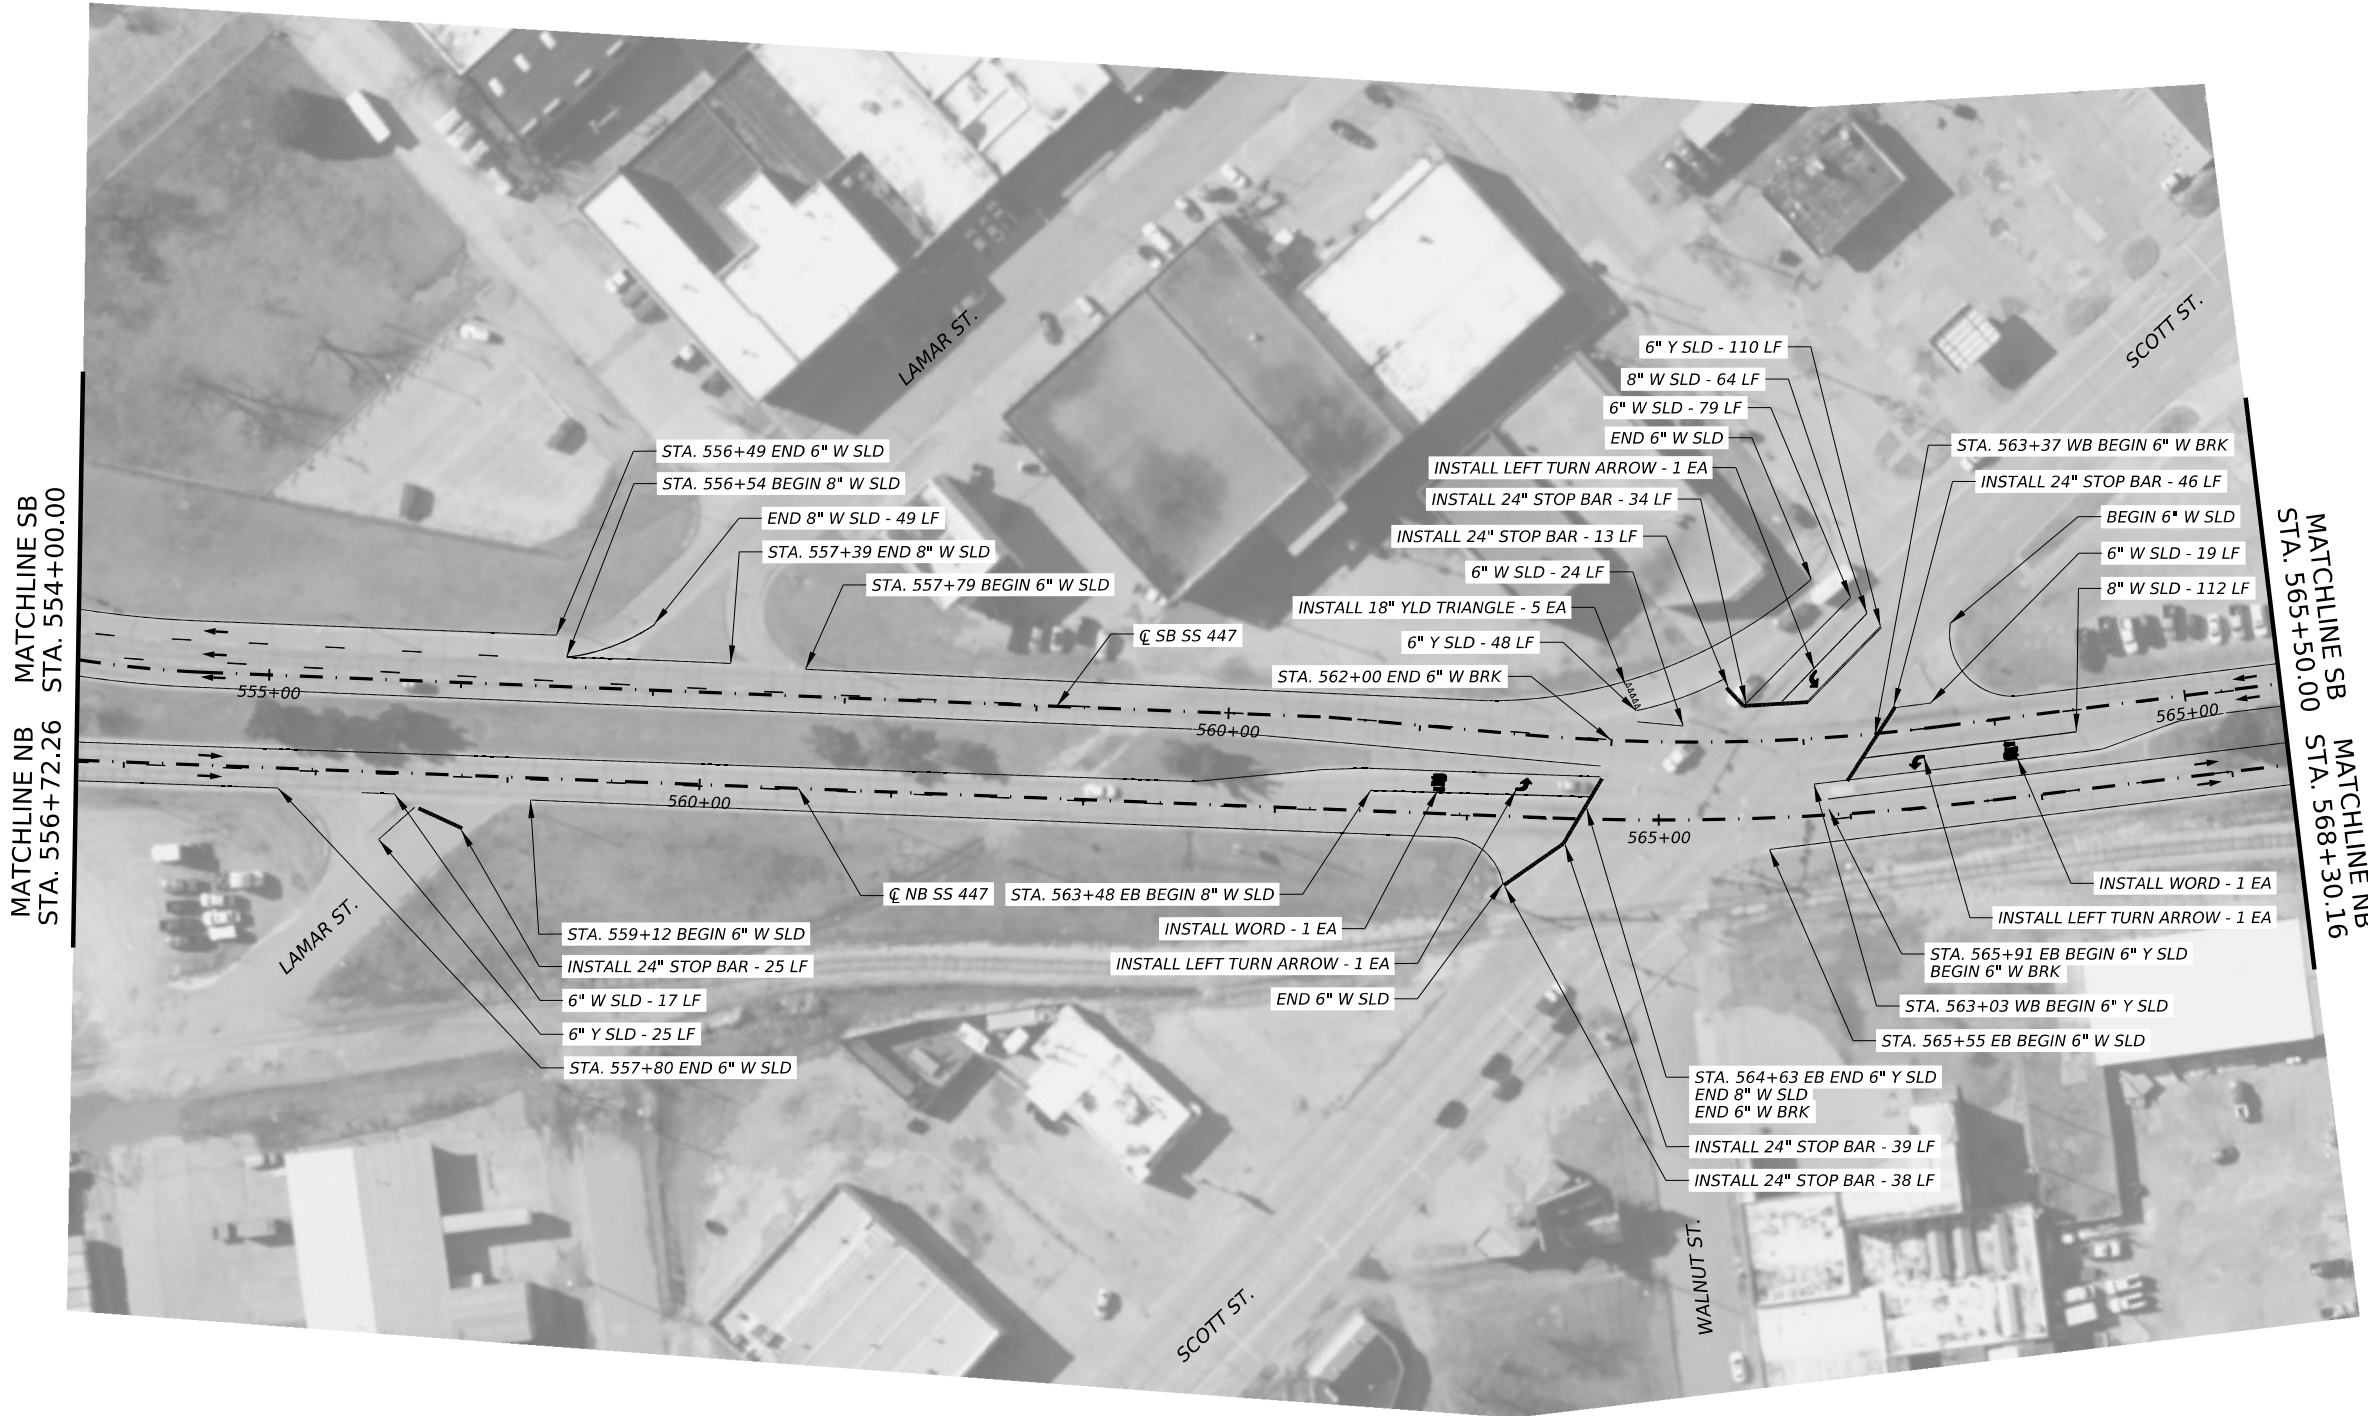

Bryson Lawrence, P.E.  
 03/26/2024

**Texas Department of Transportation**

**SS 447**  
**STRIPE & SIGN LAYOUT**



© TxDOT 2024		SHEET 3 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	75	

MATCHLINE SB STA. 565+50.00  
 MATCHLINE NB STA. 568+30.16

MATCHLINE NB STA. 556+72.26  
 MATCHLINE SB STA. 554+00.00

DATE: 3/27/2023 01:32:10 PM  
 FILE: p:\C\CL\BENTON\WIS\online.com\TXDOT\Documents\03 - WFS\Design Projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 STRIPING LAYOUT.dgn

DN:  
 CK:  
 DW:  
 CK:

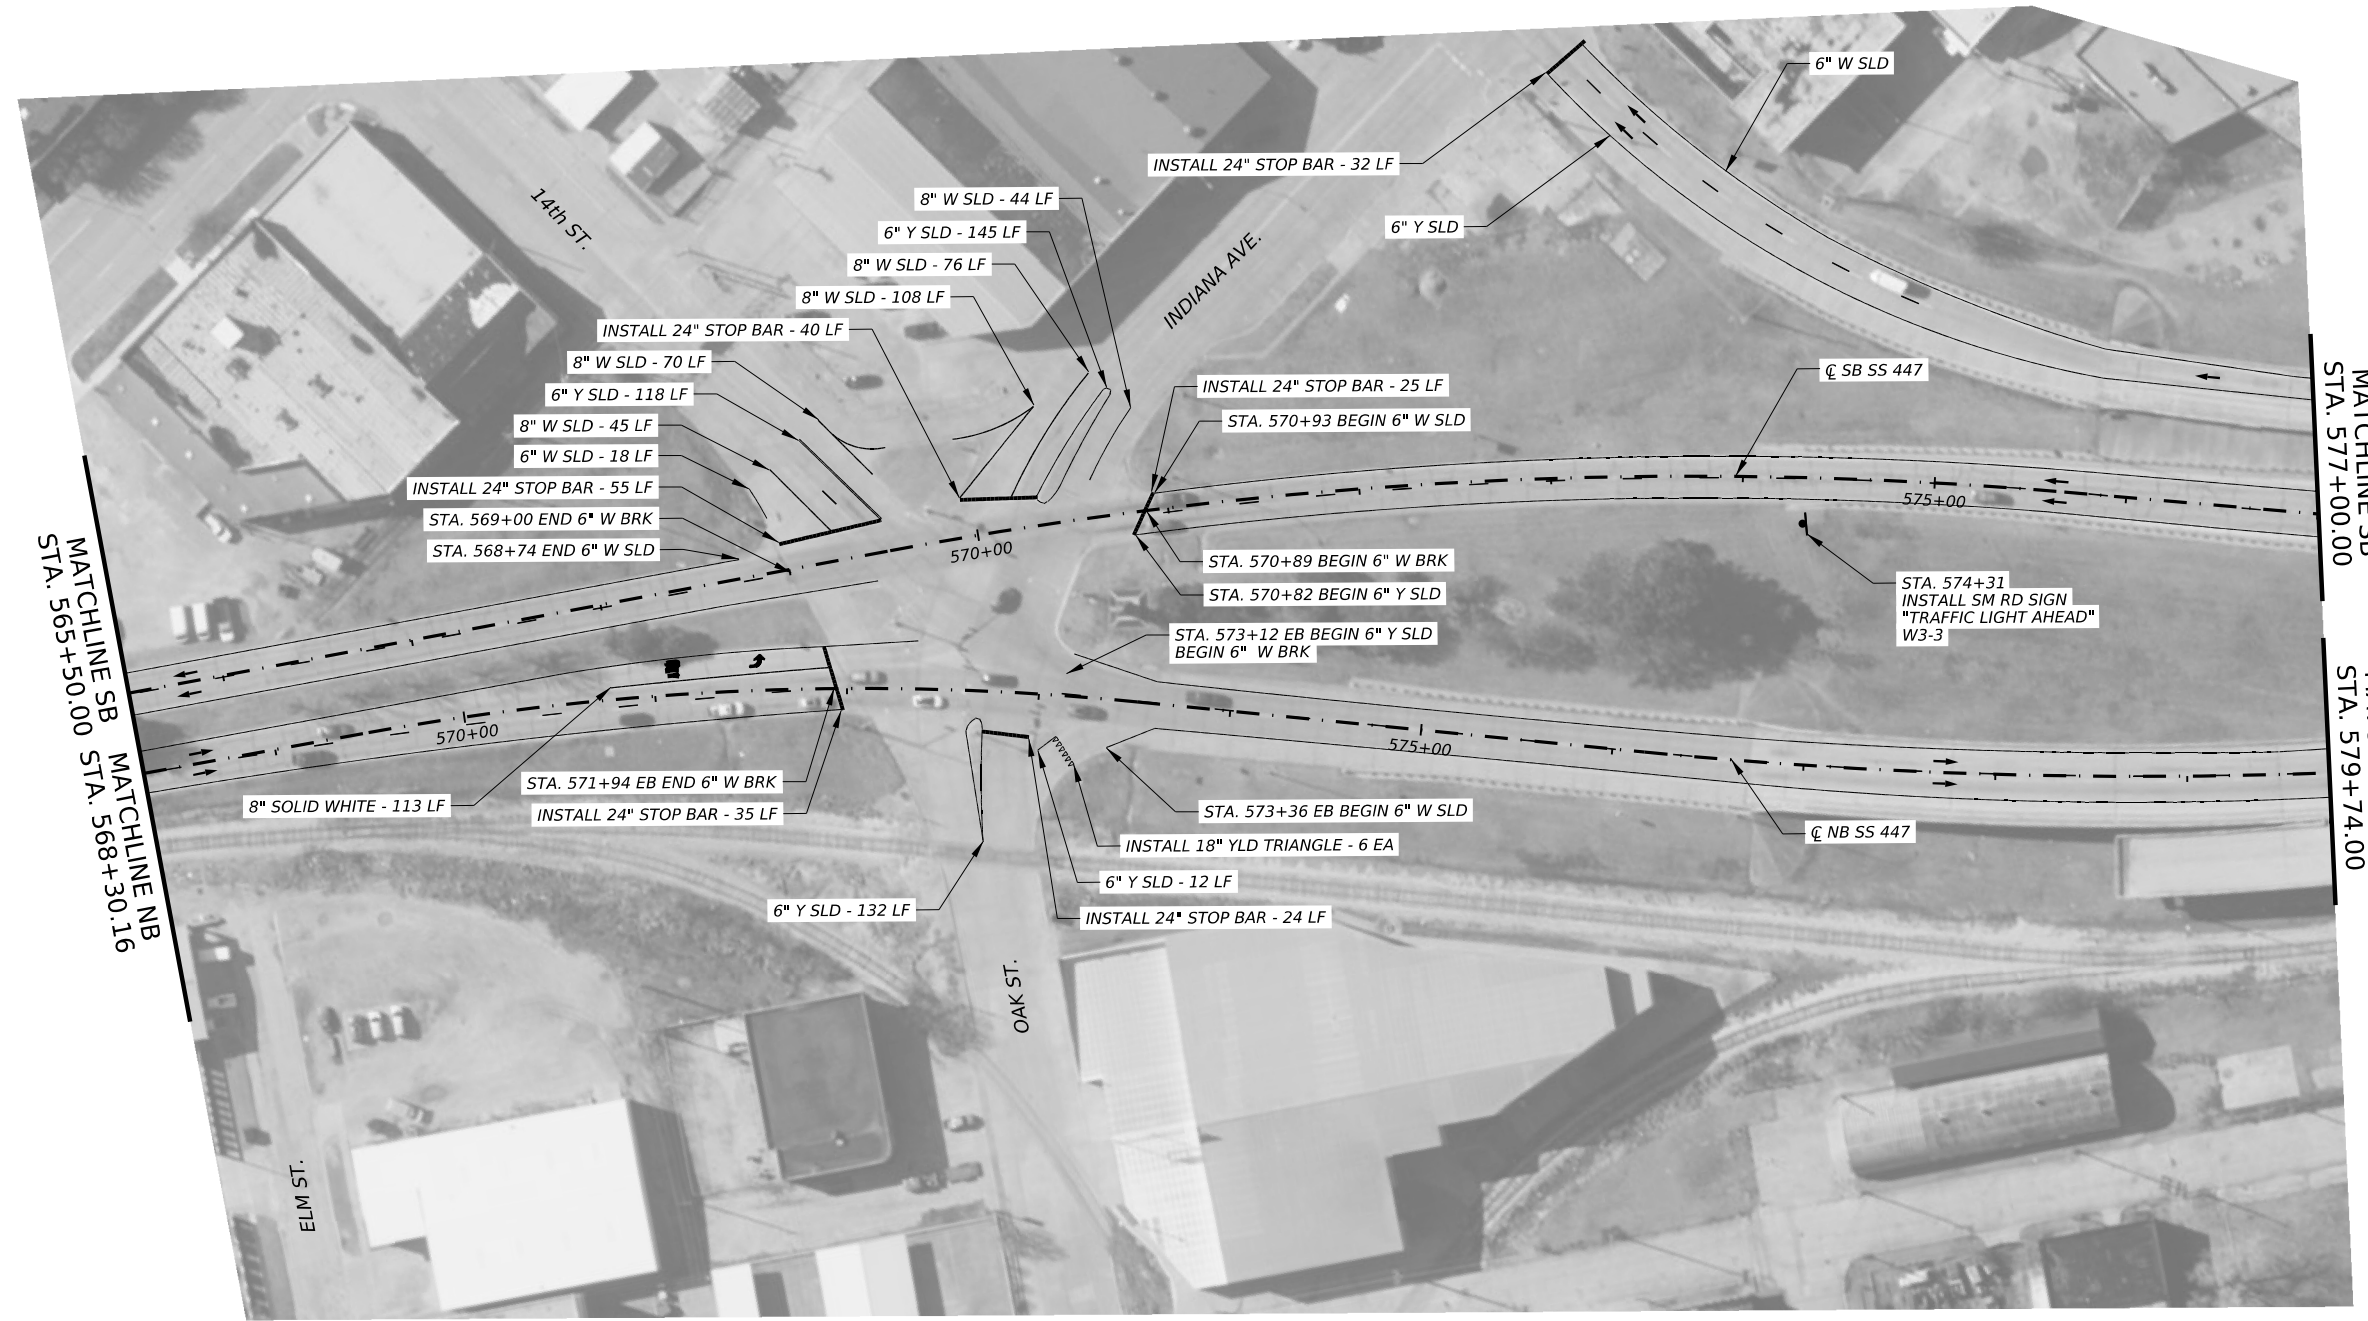

Bryson Lawrence, P.E.  
 03/26/2024





SS 447  
 STRIPE & SIGN LAYOUT

© TxDOT 2024		SHEET 4 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	76	

MATCHLINE SB  
 STA. 577+00.00  
 MATCHLINE NB  
 STA. 579+74.00

MATCHLINE SB  
 STA. 565+50.00  
 MATCHLINE NB  
 STA. 568+30.16

CK: DW: CK: DN:

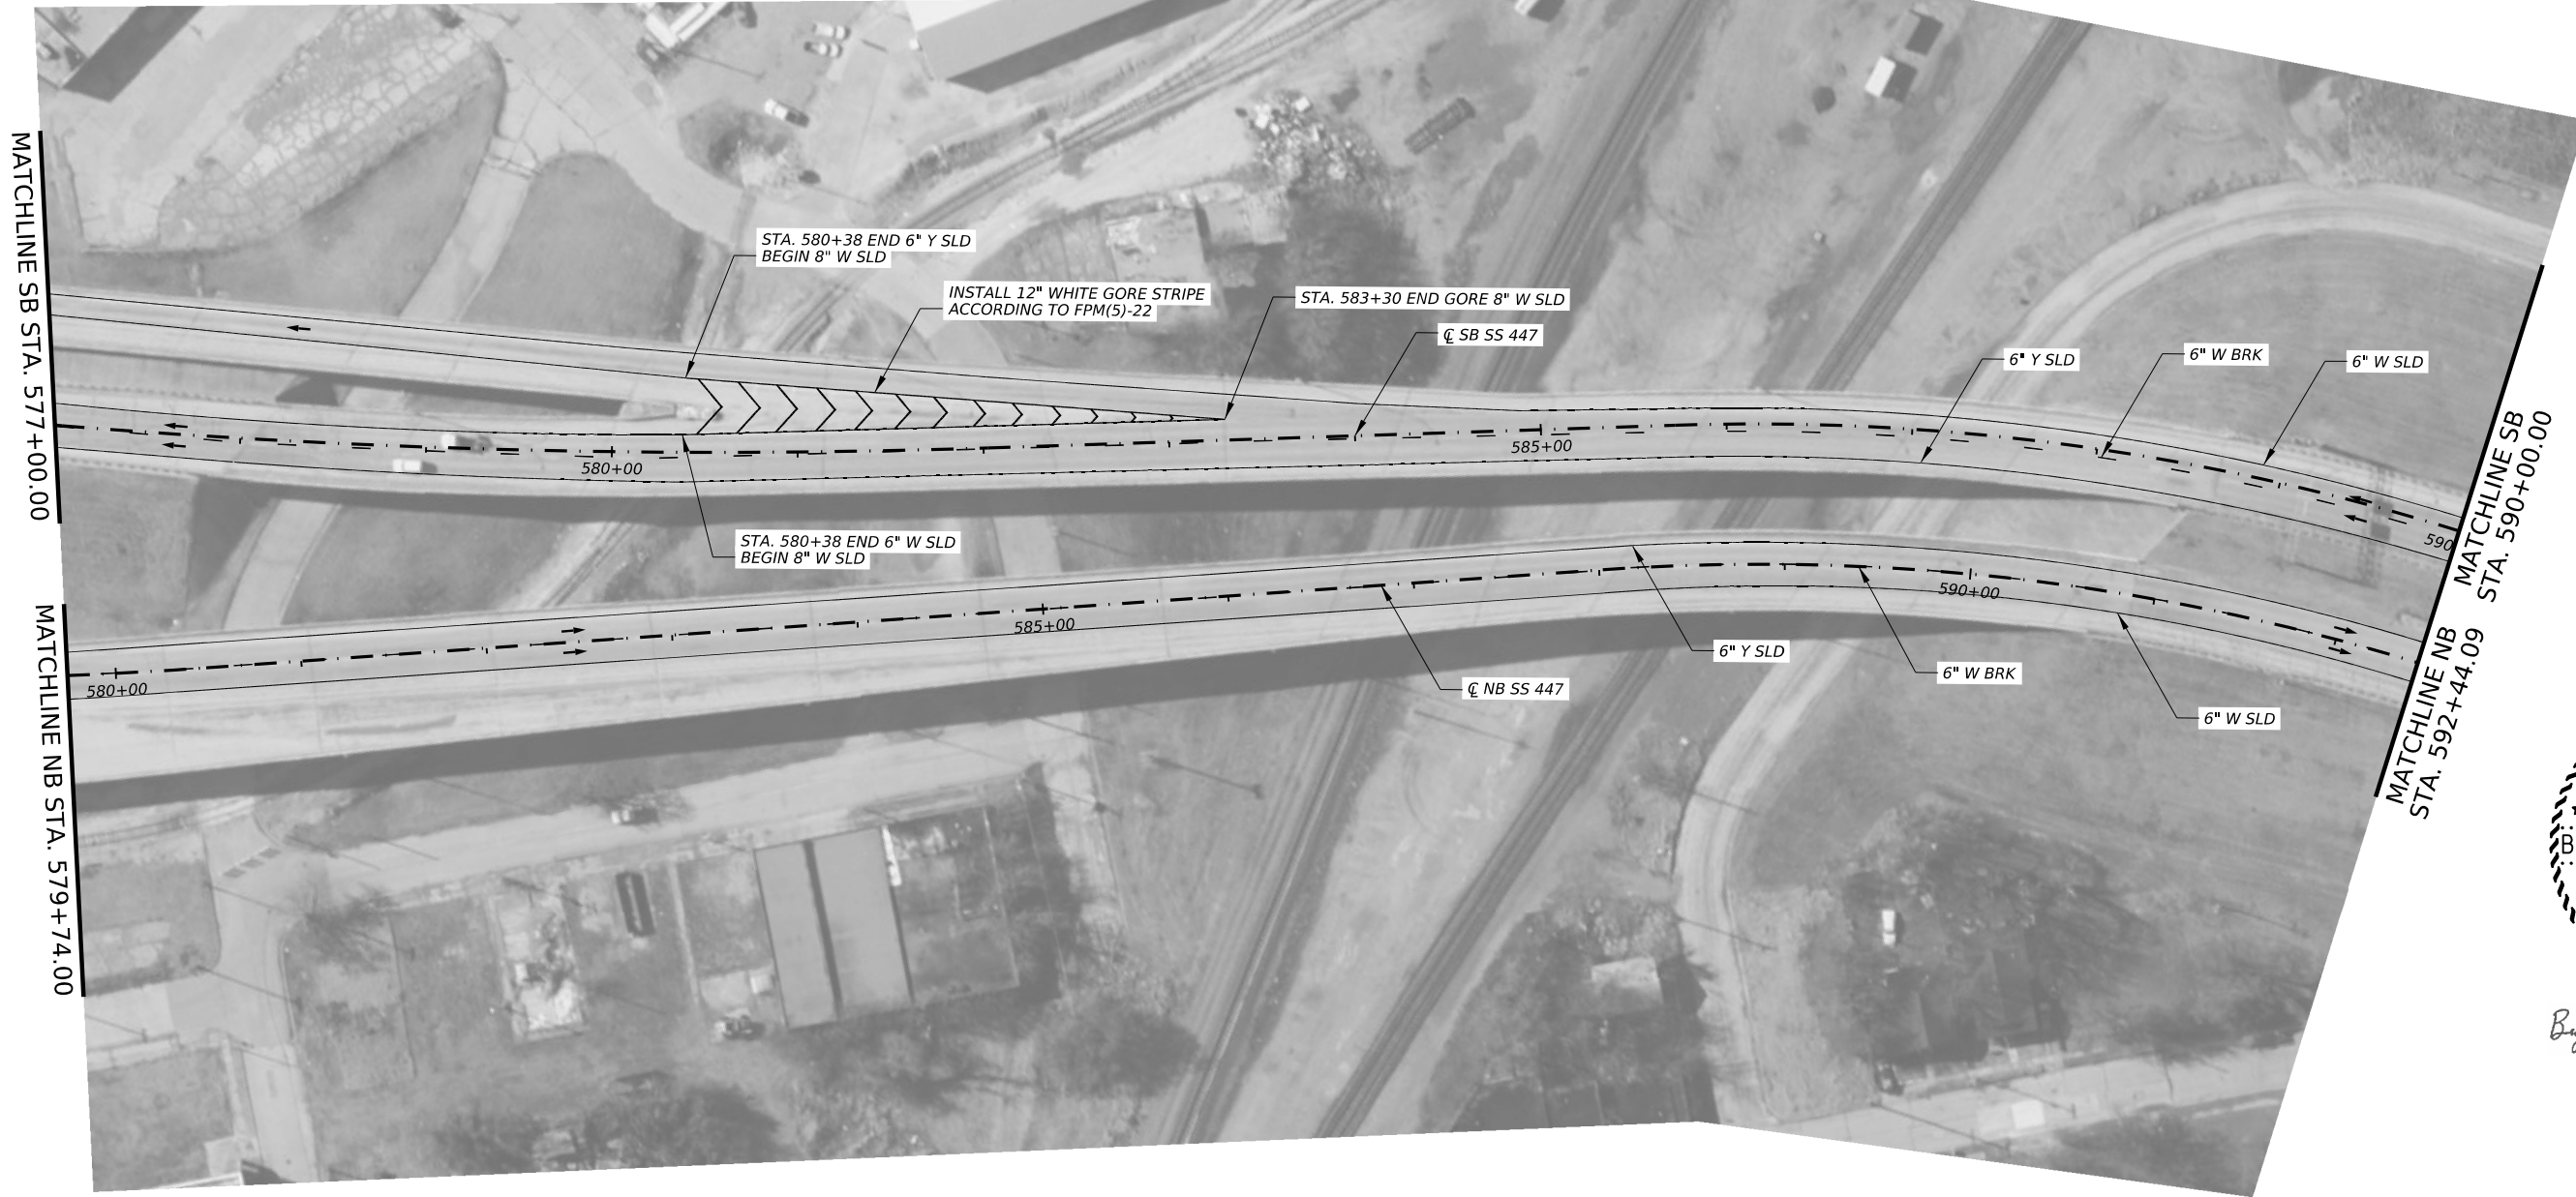

*Bryson Lawrence, P.E.*  
03/26/2024



**SS 447**  
**STRIPE & SIGN LAYOUT**


© TxDOT 2024		SHEET 5 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	77	

MATCHLINE SB STA. 577+00.00  
MATCHLINE NB STA. 579+74.00

MATCHLINE SB STA. 590+00.00  
MATCHLINE NB STA. 592+44.09


DATE: 3/27/2023 01:32:29 PM  
FILE: p:\C\CL\BENTON\WFS\Design Projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 STRIPING LAYOUT.dgn

CK:  
DW:  
CK:  
DN:

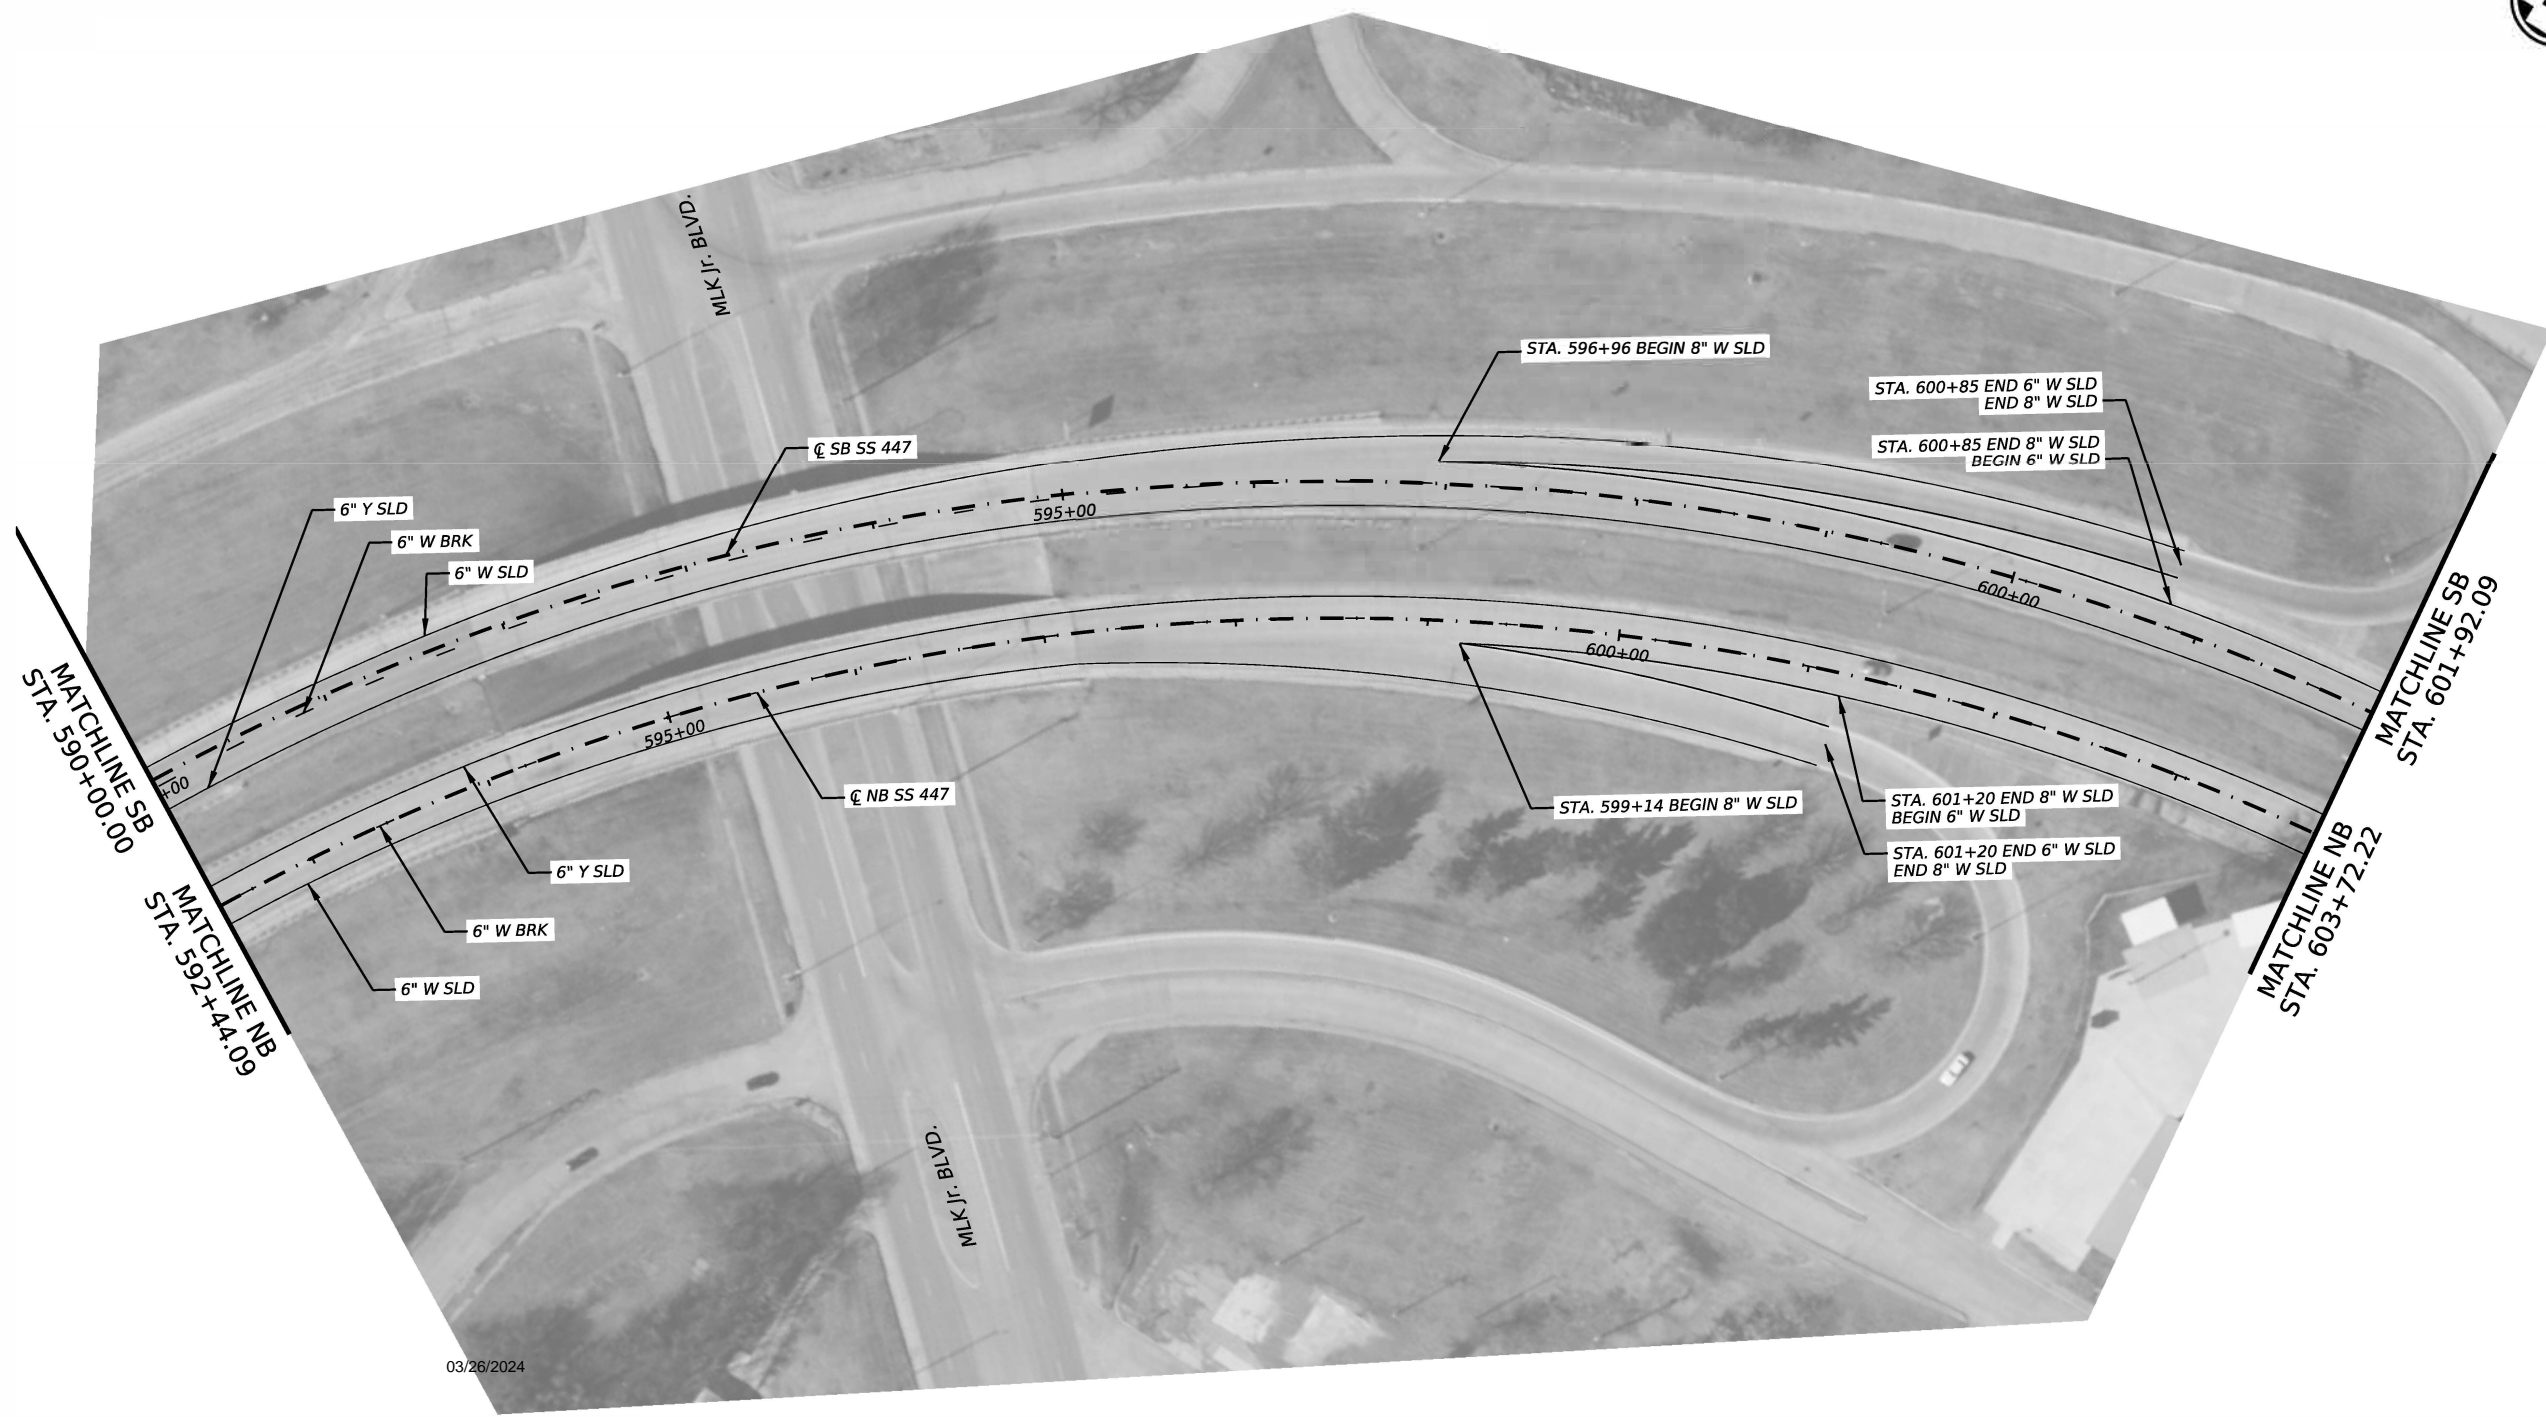

DATE: 3/26/2024 03:53:08 PM  
 FILE: p:\C\CHM\WFS\Design Projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 STRIPING LAYOUT.dgn

03/26/2024





*Bryson Lawrence, P.E.*



**SS 447**  
**STRIPE & SIGN LAYOUT**

© TxDOT 2024		SHEET 6 OF 7	
CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	78	

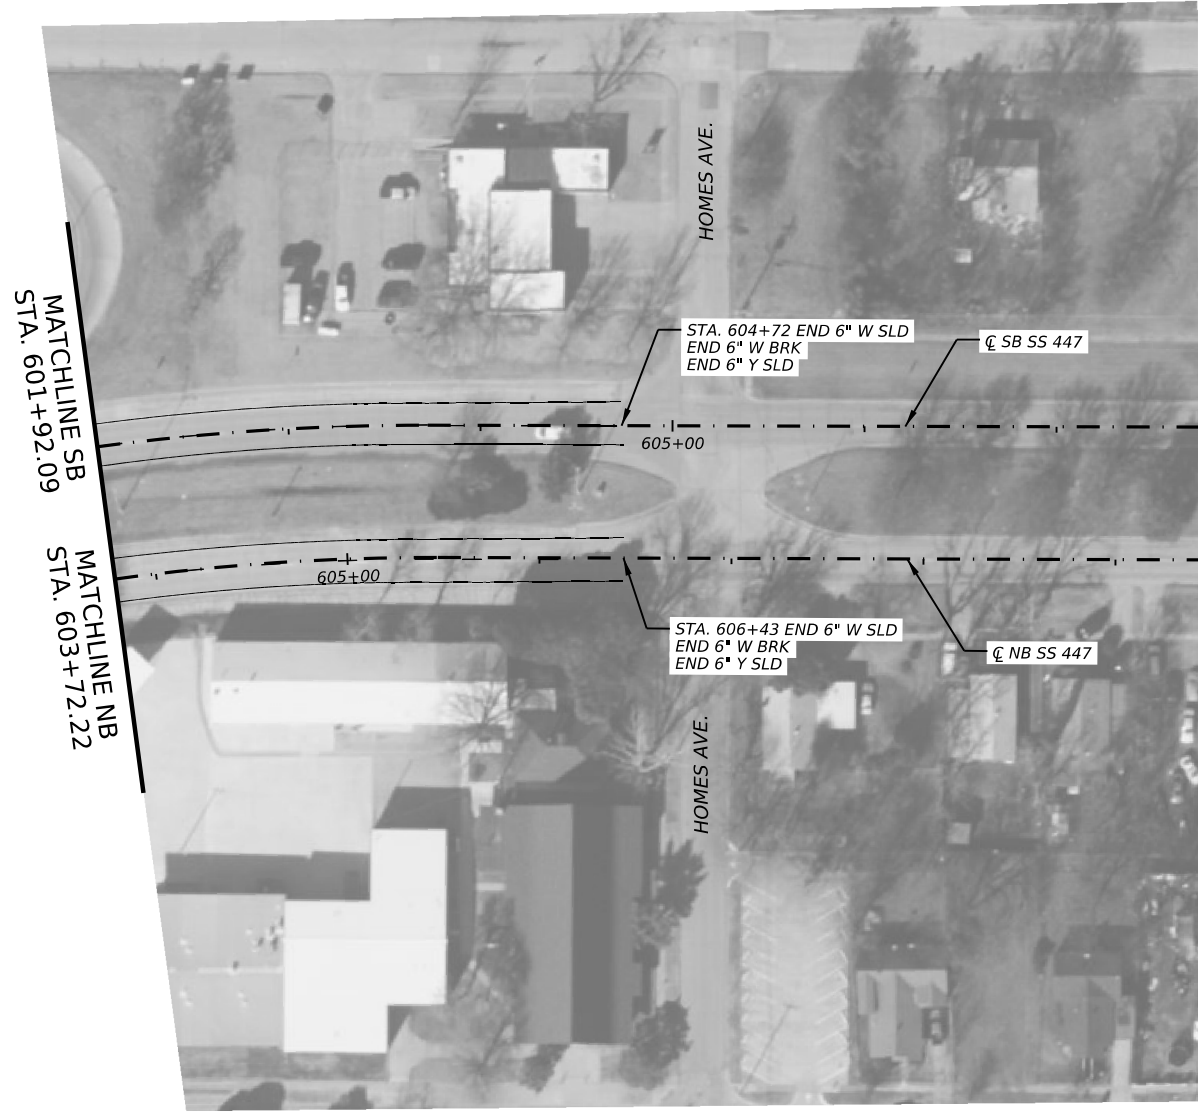

*Bryson Lawrence, P.E.*

03/26/2024

DATE: 3/23/2024 03:55:02 PM  
 FILE: p:\C\CL\BENTON\WIS\online.com\TXDOT\Documents\03 - WFS\Design Projects\015612020\4 - Design\Master Design Files\Sheet Boundary Container\SS 447 STRIPING LAYOUT.dgn

Texas Department of Transportation

**SS 447**  
**STRIPE & SIGN LAYOUT**

© TXDOT 2024 SHEET 7 OF 7

CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	79	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of any information into digital form or for any damages resulting from its use.

DATE: 10/30/2023 7:39:00 AM  
 FILE: DOCUMENTNAME\project\wiseonline.com:TXDOT12\Documents\03 - WFS\Design Project\030904PM

# SUMMARY OF SMALL SIGNS

PLAN LAYOUT SHEET NO.	SIGN NO.	SIGN DESIGNATION	SIGN CONTENT	SIGN DIMENSIONS (See above Note)	ALUMINUM TYPE A	ALUMINUM TYPE G	SMA RD SGN ASSM TY XXXXX (X) XX (X-XXXX)				BRIDGE MOUNT CLEARANCE SIGNS (See Note 2)
							Post Type	Anchor Type	Mounting Designation	TY N = Type N TY S = Type S	
73	1	R5-1	DO NOT ENTER SB STA 540+05 RT	36 x 36	X		10BWG	1	SA	P	
74	2	R5-1	DO NOT ENTER SB STA 544+16 RT	36 x 36	X		10BWG	1	SA	P	
	3	R5-1	DO NOT ENTER NB STA 547+09 LT	36 x 36	X		10BWG	1	SA	P	
	4	R5-1	DO NOT ENTER SB STA 548+11 RT	36 x 36	X		10BWG	1	SA	P	
76	5	R5-1	DO NOT ENTER SB STA 552+23 RT	36 x 36	X		10BWG	1	SA	P	
	6	W3-3	SYMBOL SIGNALIZED INTERSECTION AHEAD SB STA 574+31 RT	30 x 30	X		10BWG	1	SA	P	

FRP = Fiberglass  
 TWT = Thin-wall  
 10BWG = 10 BWG  
 S80 = Sched 80

UA = Univer-Conc  
 UB = Univer-Bolt  
 SA = Slip-Conc  
 SB = Slip-Bolt  
 WS = Wedge Steel  
 WP = Wedge Plastic

P = Prefab. "Plain"  
 T = Prefab. "T"  
 U = Prefab. "U"  
 1EXT or 2EXT = # of Ext.  
 BM = Extruded Beam  
 WC = 1.12 #/ft Wing Chan.  
 EXAL = Extruded Alum. Signs

ALUMINUM SIGN BLANKS THICKNESS	
Square Feet	Minimum Thickness
Less than 7.5	0.080"
7.5 to 15	0.100"
Greater than 15	0.125"

The Standard Highway Sign Designs for Texas (SHSD) can be found at the following website:  
<http://www.txdot.gov/>

- NOTE:**
- Sign supports shall be located as shown on the plans, except that the Engineer may shift the sign supports, within design guidelines, where necessary to secure a more desirable location or to avoid conflict with utilities. Unless otherwise shown on the plans, the Contractor shall stake and the Engineer will verify all sign support locations.
  - For installation of bridge mount clearance signs, see Bridge Mounted Clearance Sign Assembly (BMCS) Standard Sheet.
  - For Sign Support Descriptive Codes, see Sign Mounting Details Small Roadside Signs General Notes & Details SMD(GEN).



## SUMMARY OF SMALL SIGNS

**SOSS SS 447 SHEET 1 OF 1**


FILE:	slums16.dgn	DN:	TxDOT	CK:	TxDOT	DW:	TxDOT	CR:	TxDOT
© TxDOT	May 1987	CONT	SECT	JOB	HIGHWAY				
REVISIONS		0156	12	020	SS 447				
4-16		DIST	COUNTY	SHEET NO.					
8-16		WFS	WICHITA	80					






# REFLECTIVE RAISED PAVEMENT MARKERS FOR VEHICLE POSITIONING GUIDANCE


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for any errors or omissions in this standard.

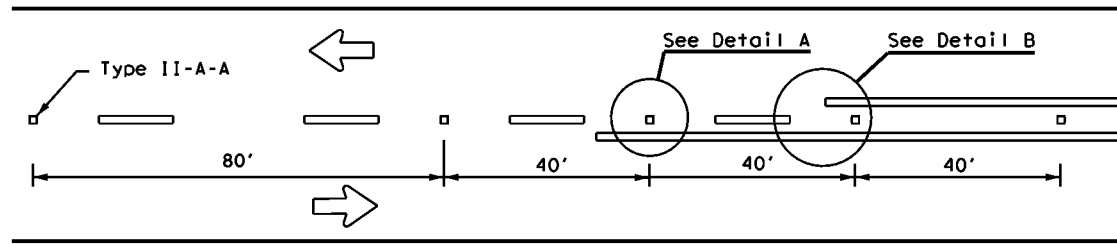

**CENTERLINE FOR ALL TWO LANE TWO-WAY ROADWAYS**

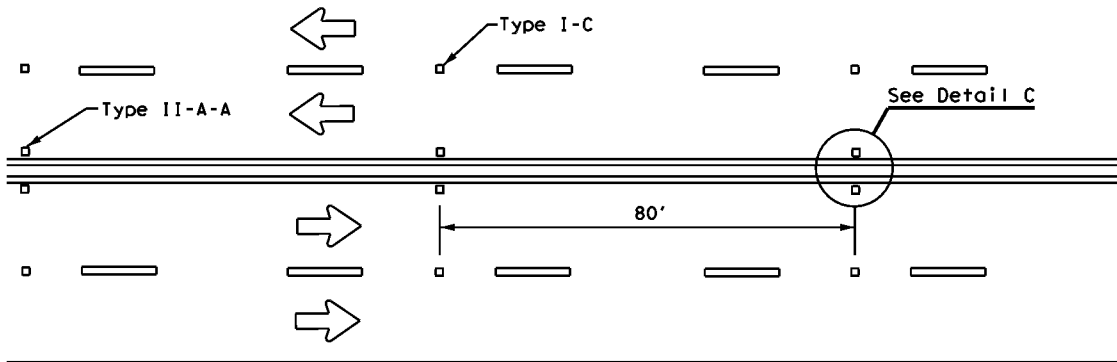


**CENTERLINE & LANE LINES  
FOR FOUR LANE TWO-WAY ROADWAYS**

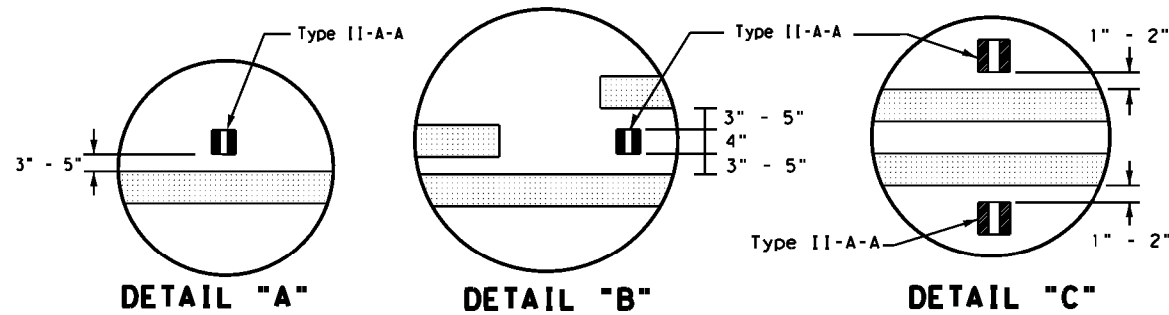


**DETAIL "A"**

**DETAIL "B"**

**DETAIL "C"**

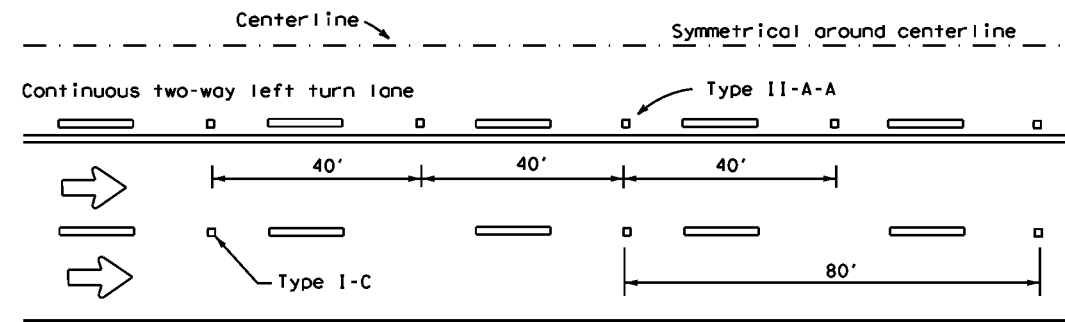


**CENTERLINE AND LANE LINES FOR TWO-WAY LEFT TURN LANE**

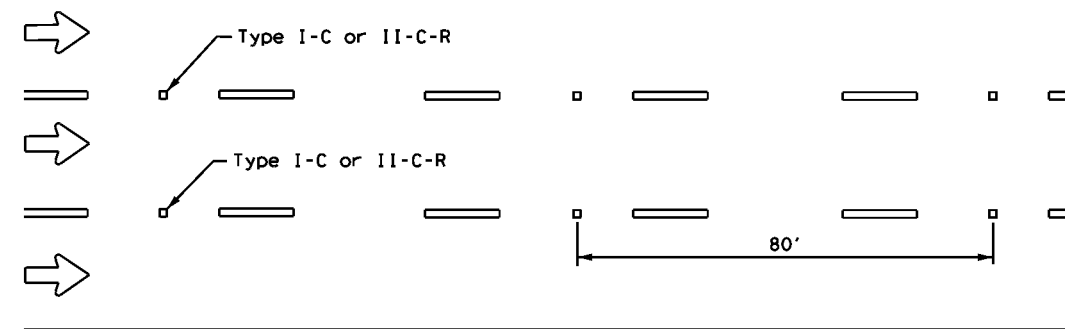


**LANE LINES FOR ONE-WAY ROADWAY (NON-FREEWAY FACILITIES)**

Raised pavement markers Type II-C-R shall have clear face toward normal traffic and red face toward wrong-way traffic.  
 See Note 3.

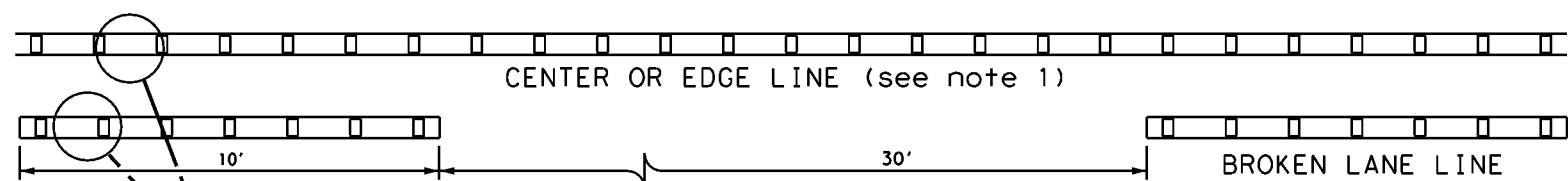

CENTER OR EDGE LINE (see note 1)


BROKEN LANE LINE



**REFLECTORIZED PROFILE  
PATTERN DETAIL**

USING REFLECTIVE PROFILE PAVEMENT MARKINGS

6" EDGE LINE, 6" CENTERLINE  
OR 6" LANE LINE

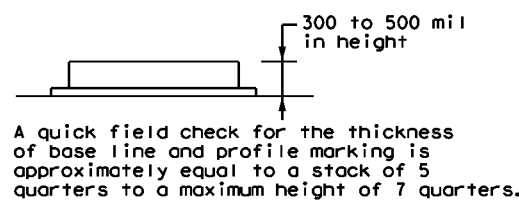


A quick field check for the thickness of base line and profile marking is approximately equal to a stack of 5 quarters to a maximum height of 7 quarters.

**NOTES**


1. Edge lines should typically be 6" wide and the materials shall be specified in the plans.
2. Profile markings shall not be placed on roadways with a posted speed limit of 45 MPH or less.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240


All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

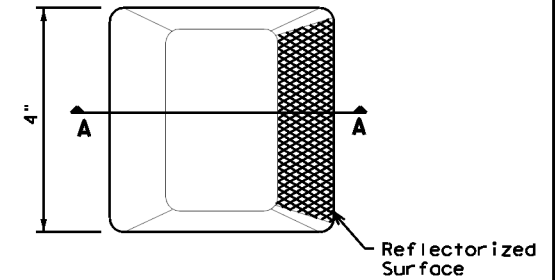

**Type I (Top View)**

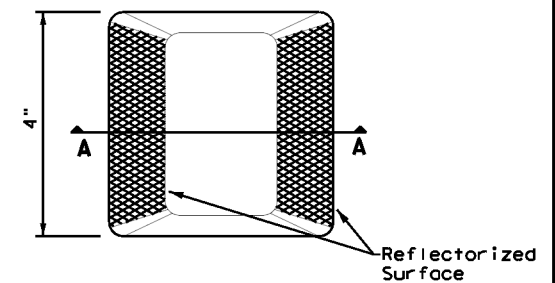

**Type II (Top View)**

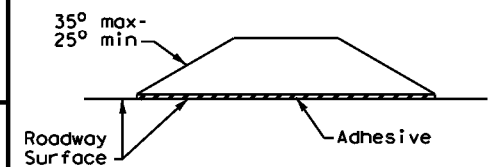

**SECTION A**

**RAISED PAVEMENT MARKERS**



**POSITION GUIDANCE USING  
RAISED MARKERS  
REFLECTORIZED PROFILE  
MARKINGS  
PM(2) - 22**


FILE: pm2-22.dgn	DWG:	CHK:	DWG:	CHK:
© TxDOT December 2022	CONT:	SECT:	JOB:	HIGHWAY:
REVISIONS	0156	12	020	SS 447
4-77 8-00 6-20	DIST:	COUNTY:	SHEET NO.:	
4-92 2-10 12-22	WFS	WICHITA	82	
5-00 2-12				









DATE: 11/1/2023 7:14:47 AM  
 FILE: p:\w\txdot\projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\8. Traffic\FPM(3)-22.dgn

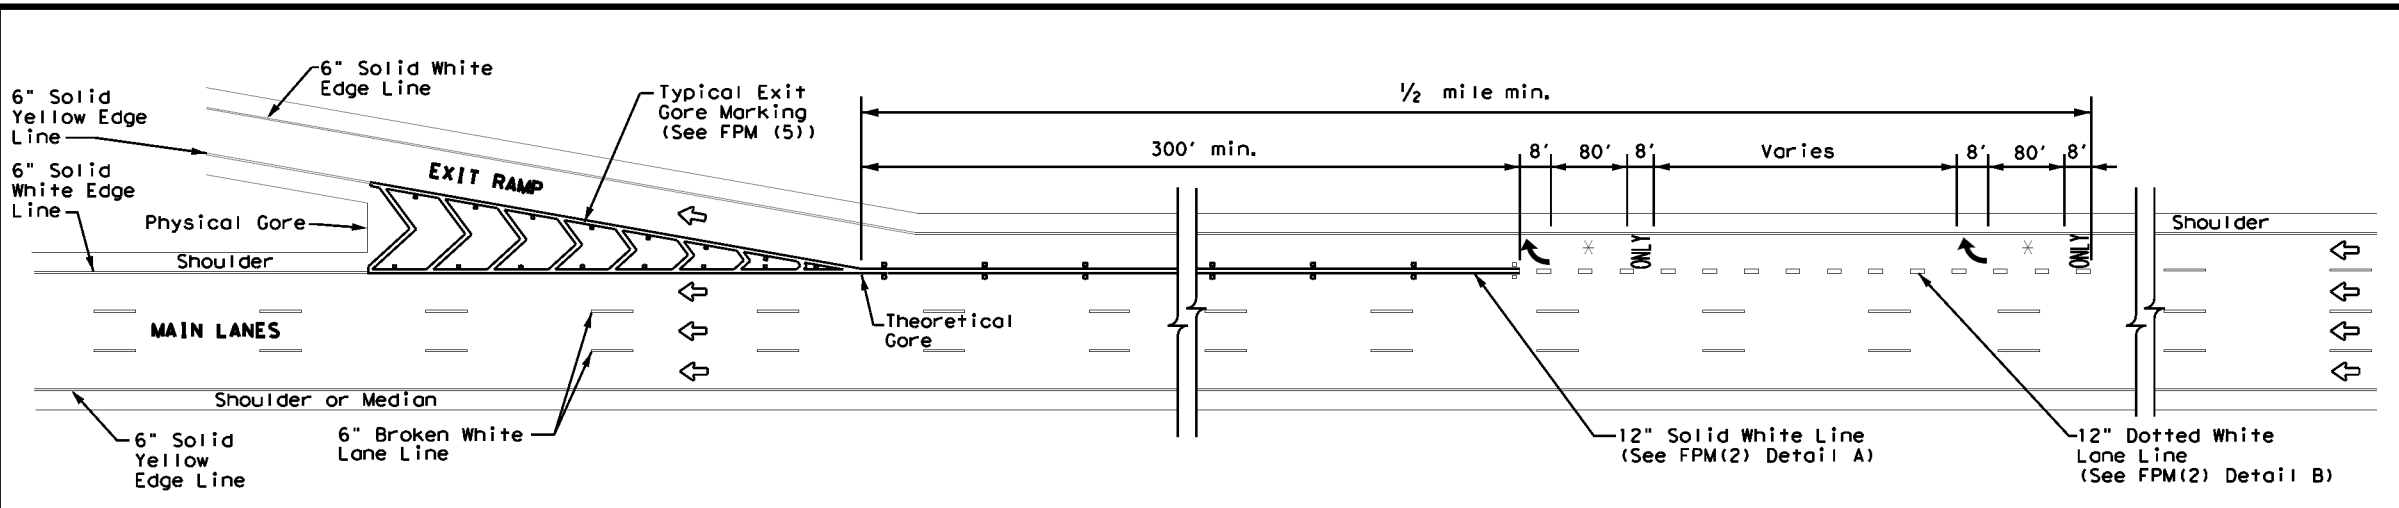

**SINGLE LANE EXIT - LANE DROP OR EXIT ONLY**

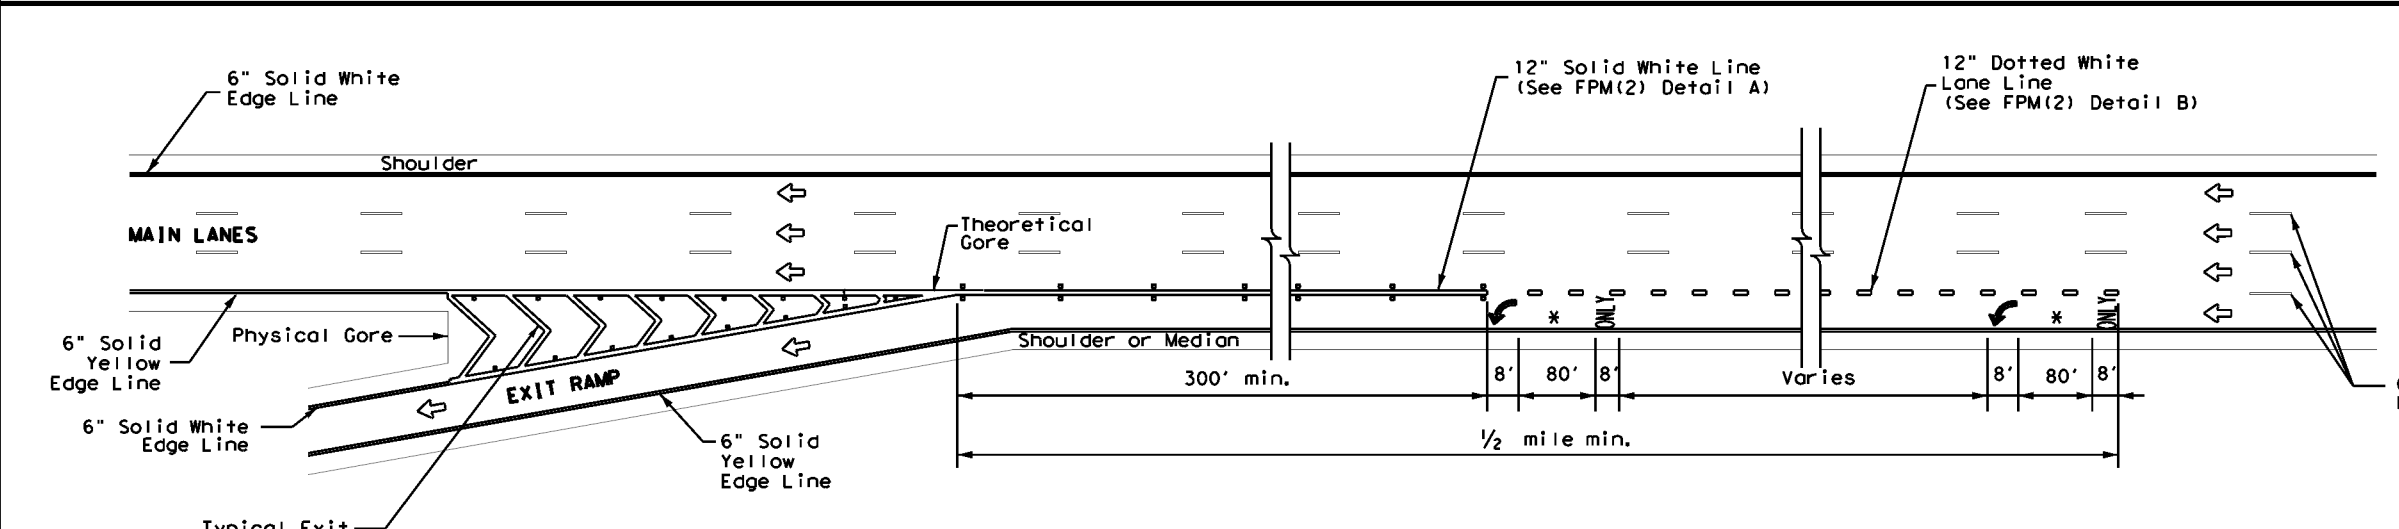

**SINGLE LANE EXIT - LANE DROP OR EXIT ONLY (LEFT SIDE)**

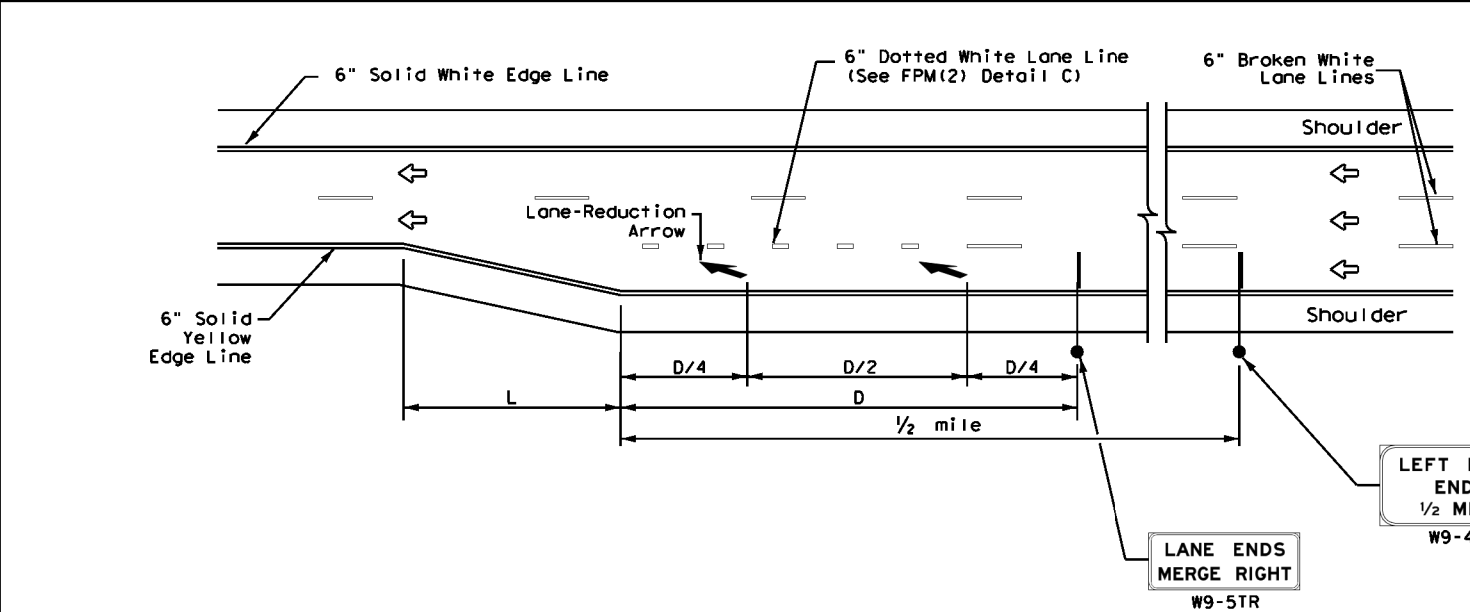

**FREEWAY LANE REDUCTION**

**NOTES**

1. Large Guide signs shall conform to the TxDOT Freeway Signing Handbook.
2. An optional third lane reduction arrow may be added based on engineering judgement. If used, the optional third lane reduction arrow should be centered between the first and last lane reduction arrows.
3. Arrows and sign details can be found in the Standard Highway Sign Designs for Texas (SHSD) at <http://www.txdot.gov>.
4. These guidelines may also be applied to the design of a right side lane reduction. Use LANE ENDS MERGE LEFT (W9-5TL) and RIGHT LANE ENDS 1/2 MILE (W9-4TR) signs in lieu of what is shown on drawing.

ADVANCED WARNING SIGN DISTANCE (D)		
Posted Speed	D (ft)	L (ft)
45 MPH	775	L=WS
50 MPH	885	
55 MPH	990	
60 MPH	1,100	
65 MPH	1,200	
70 MPH	1,250	
75 MPH	1,350	
80 MPH	1,500	
85 MPH	1,625	

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

LEGEND	
	Traffic flow
	Pavement marking arrows (white)
	ReflectORIZED Raised Markers (RPM) Type II-C-R
	Arrow markings are optional, however "ONLY" is required if arrow is used

**GENERAL NOTES**

1. Pavement markings shall be white except as otherwise noted.
2. Length of 12" white line may vary depending on location.
3. Wide (12") dotted lane line (see FPM(2) Detail B) is used to separate a through lane that continues beyond the interchange from an adjacent mandatory exit lane.
4. Edge lines are not required in curb and gutter sections of frontage roads.
5. See FPM(1) for traffic lane line pavement marking details.



**TYPICAL STANDARD FREEWAY PAVEMENT MARKINGS SINGLE LANE DROP (EXIT ONLY) AND LANE REDUCTION DETAILS**

**FPM(3)-22**


FILE: fpm(3)-22.dgn	DW: CK:	DW: CK:	CK:
© TxDOT October 2022	CONT SECT	JOB	HIGHWAY
REVISIONS	0156 12	020	SS 447
4-92 2-10	DIST	COUNTY	SHEET NO.
5-00 2-12	WFS	WICHITA	86
8-00 10-22			

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of units or for the accuracy of the information provided. For more information, contact the Texas Department of Transportation, Project Design Division, 12000 North Loop West, P.O. Box 21087, Houston, Texas 77211-0877, or call 1-800-392-0000.


DATE: 11/1/2023 7:14:53 AM  
 FILE: P:\t\dot\project\wiseonline.com\TXDOT12\Documents\03 - WFS\Design Project\03090000\03090000.dwg

**EXIT NUMBER PAVEMENT MARKING NOTES**

1. Minimum 8 foot white exit number pavement markings should be used, unless otherwise noted.
2. Spacing between letters and numbers should be approximately 4 inches.
3. Pavement markings are to be located as specified elsewhere in the plans.
4. Numbers and Letters details can be found in the Standard Highway Design for Texas (SHSD) Section 12 at <http://www.txdot.gov>

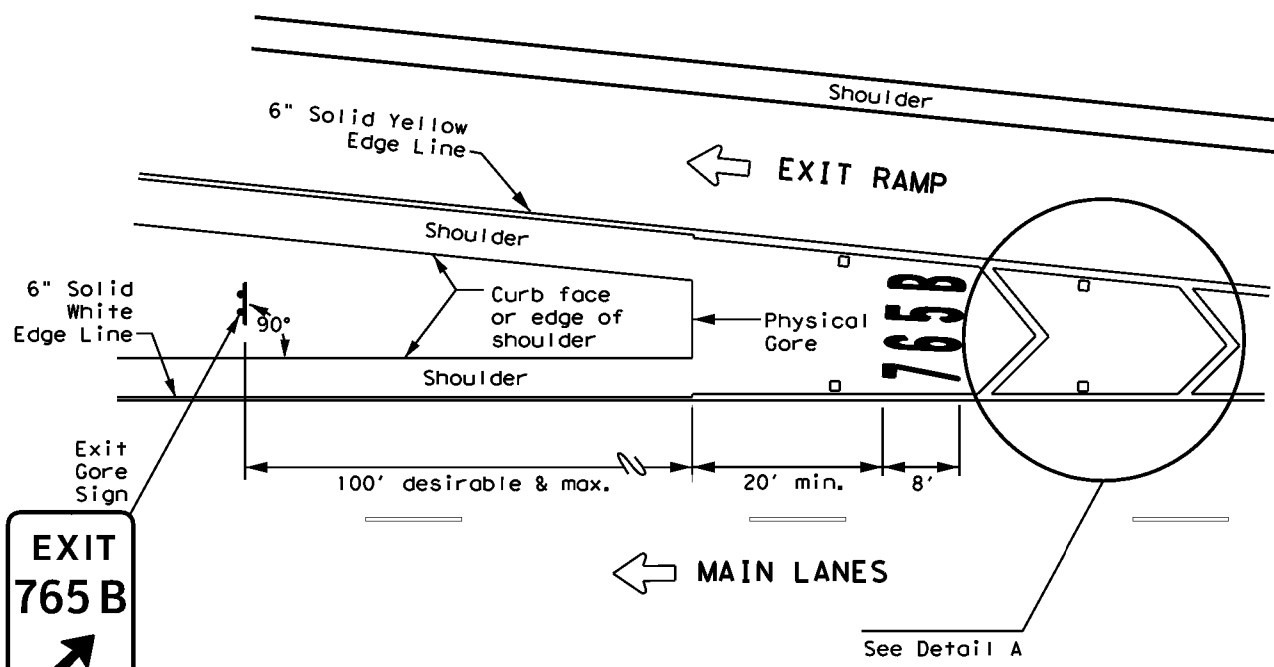

**MARKINGS WITH EXIT NUMBER**

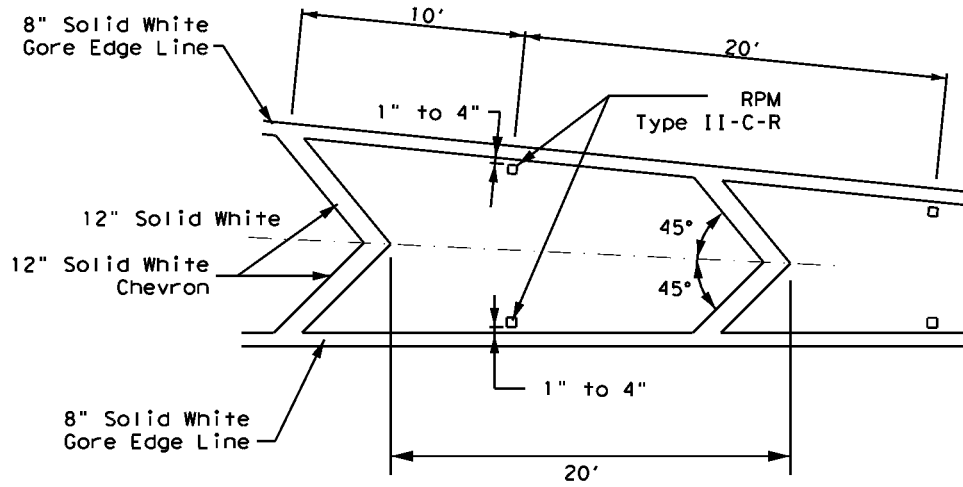

**NOTES**


1. Raised pavement markers shall be centered between each chevron or neutral area line.
2. For more information, see Reflectorized Raised Pavement Marker Detail.

**DETAIL A**


MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.

LEGEND	
←	Traffic flow
□	Reflectorized Raised Markers (RPM) Type II-C-R

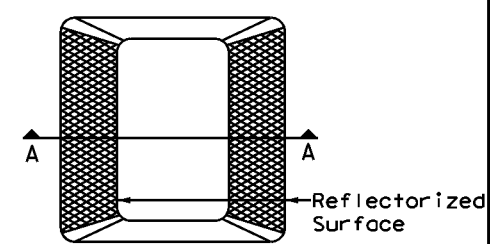

**Type II (Top View)**

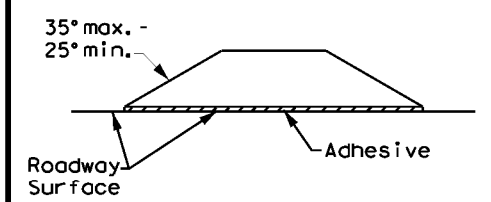

**SECTION A**


**REFLECTORIZED RAISED PAVEMENT MARKER (RPM)**



**EXIT GORE PAVEMENT MARKINGS**

**FPM(5) - 22**

FILE: fpm(5)-22.dgn	DWG: CK:	DWG: CK:	CK:
© TxDOT October 2022	CONT: 0156	SECT: 12	JOB: 020
REVISIONS: 9-19	DIST: WFS	COUNTY: WICHITA	HIGHWAY: SS 447
10-22			SHEET NO.: 87

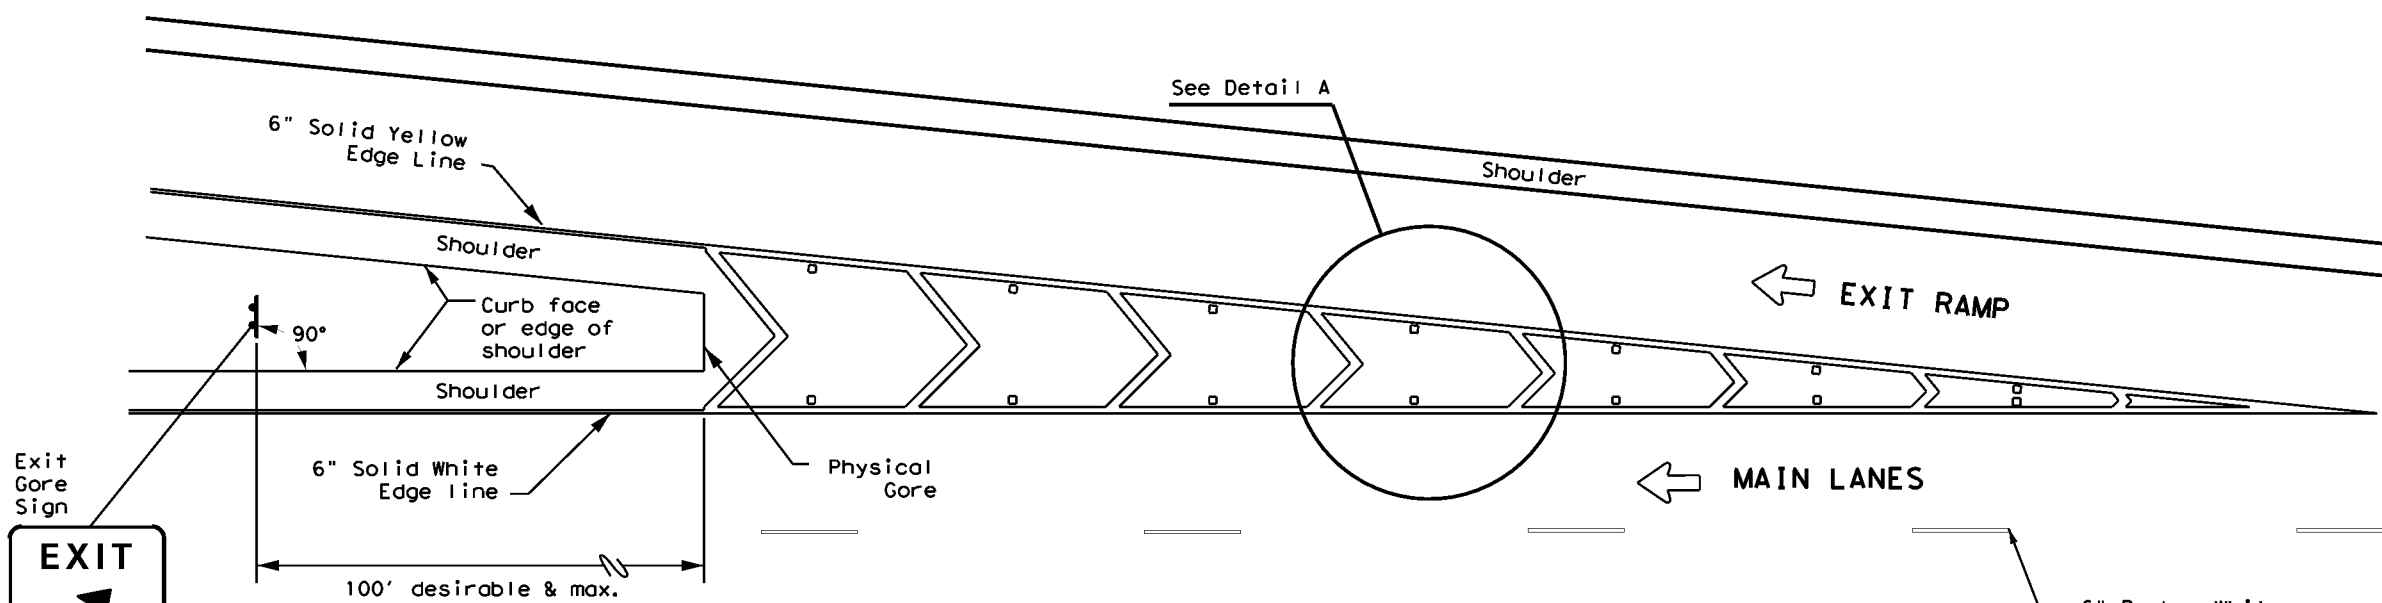

**MARKINGS WITHOUT EXIT NUMBER**

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 09/18/2023 08:25 AM  
 FILE: DOCUMENT NAME

REFLECTOR UNIT SIZES FOR DELINEATORS AND OBJECT MARKERS				DELINEATORS				D & OM DESCRIPTIVE CODES			
DEVICE	SIZE 1	SIZE 2	SIZE 3	SIZE 4	DEVICE	SINGLE	DOUBLE	INSTL DEL ASSM (D-XX)SZ X (XXXX)XXX(XX)			
								NUMBER OF REFLECTORS S = Single D = Double COLOR OF REFLECTORS W = White Y = Yellow R = Red REFLECTOR UNIT SIZE 1 or 2 TYPE OF POST OR DELINEATOR WC = Wing Channel Post YFLX = Yellow Flexible Post WFLX = White Flexible Post BRF = Barrier Reflector TYPE OF MOUNT GND = Embedded (drivable or set in concrete) CTB = Concrete Barrier Mount GF1 or GF2 = Guard Fence Attachment SRF = Surface Mount		SHEETING: Yellow, White or Red Type B or C reflective sheeting NOTE: 1. Size 1 and 4 - Direct applied reflective sheeting for use on flexible post (fix). 2. Size 2 and 3 - For use on wing channel (wc) post only. Use approved metal, plastic or fiberglass backplate with 17/64" mounting holes.	
SHEETING: Yellow, White or Red Type B or C reflective sheeting				SHEETING: Yellow, White or Red Type B or C Reflective Sheeting				DIRECTION: If Required BI = Bi-Directional BR = Bi-Directional with red on back		INSTL OM ASSM (OM-XX) (XXXX)XXX(XX)	
POST TYPE: WC, YFLX, WFLX				MOUNT TYPE: GND, SRF				TYPE OF OBJECT MARKER: 1, 2, 3, or 4		NUMBER OF REFLECTORS OR DIRECTION X = 3-Size 2 reflector units (Type 2 only) Y = 1-Size 3 reflector unit (Type 2 only) Z = 3-Size 1 or 1-Size 4 reflector units (Type 2 only) L = Left Side (Type 3 Object Marker only) R = Right Side (Type 3 Object Marker only) C = Center (Type 3 Object Marker only) TYPE OF POST WC = Wing Channel Post WFLX = White Flexible Post TWT = Thin Walled Tubing TYPE OF MOUNT GND = Embedded (drivable) SRF = Surface Mount WAS = Wedge Anchor Steel WAP = Wedge Anchor Plastic DIRECTION: If Required BI = Bi-Directional	

OBJECT MARKERS								
DEVICE	Type 1 (OM-1)	Type 2 (OM-2)			Type 3 (OM-3)			Type 4 (OM-4)
	OM-1	OM-2X	OM-2Y	OM-2Z	OM-3L	OM-3R	OM-3C	OM-4
								SHEETING: Yellow-Type B or C Sheeting POST TYPE: TWT MOUNT TYPE: WAS, WAP
SHEETING: Yellow-Type B or C Sheeting		SHEETING: Yellow - Type B or C Sheeting			SHEETING: Alternating acrylic black and retroreflective yellow - Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting			SHEETING: Red -Type B <sub>FL</sub> or C <sub>FL</sub> Sheeting
POST TYPE: TWT		POST TYPE: WC	POST TYPE: WC	POST TYPE: WFLX	POST TYPE: TWT			POST TYPE: TWT
MOUNT TYPE: WAS, WAP		MOUNT TYPE: GND	MOUNT TYPE: GND	MOUNT TYPE: GND, SRF	MOUNT TYPE: WAS, WAP			MOUNT TYPE: WAS, WAP

DEPARTMENTAL MATERIAL SPECIFICATIONS	
FLEXIBLE DELINEATOR & OBJECT MARKER POSTS (EMBEDDED & SURFACE MOUNT TYPES)	DMS-4400
SIGN FACE MATERIALS	DMS-8300
DELINEATORS, OBJECT MARKERS AND BARRIER REFLECTORS	DMS-8600

BARRIER REFLECTORS (BRF)			CHEVRONS				ONE DIRECTION LARGE ARROW		NOTE: Delineator and object marker substrates and sign substrates shall be 0.080" Aluminum sign blank to conform to ASTM B-209 Alloy 6061-T6 or approved alternative.
DEVICE	GF1	GF2	CTB	DEVICE				W1-6	
									DELINEATOR & OBJECT MARKER MATERIAL DESCRIPTION <b>D &amp; OM(1)-20</b>
SHEETING: Yellow, White, Red			SHEETING: Yellow, White, Red				SHEETING: Yellow, White, Red		
NOTE: 1. Barrier reflectors shall meet the requirements of DMS 8600. 2. Approved Barrier Reflectors are listed on the "Barrier Reflectors" Material Producer List at: www.txdot.gov.			NOTE: 1. CHEVRON (W1-8) signs and ONE DIRECTION LARGE ARROW (W1-6) Signs shall be installed per Sign Mounting Details (SMD) Standard Sheets and paid under Item 644 (Small Roadside Sign Assemblies). 2. When there is a need to increase conspicuity, the Texas version of the ONE DIRECTION LARGE ARROW sign (W1-9T) may be used instead of the ONE DIRECTION LARGE ARROW (W1-6).				NOTE: 1. Reflective sheeting shall have a minimum dimension of 3 inches and minimum surface area of 9 square inches.		Traffic Safety Division Standard Texas Department of Transportation
SIZE (W x L): GF1 (3x3), GF2 (3x3), CTB (3x3)			SIZE (W x L): 18"x 24" (Conventional), 24"x 30" (Conventional Oversize), 30"x 36" (Expressway), 36" x 48" (Freeway)				SIZE (W x L): 48" x 24" (Conventional), 60" x 30" (Expressway & Freeway)		
MOUNTING HEIGHT: 4'-0" or 7'-0"			MOUNTING HEIGHT: 4'-0" or 7'-0"				MOUNTING HEIGHT: 7'-0"		FILE: dom1-20.dgn © TxDOT August 2004 REVISIONS: 0156 12, 020, SS 447 10-09 3-15, 4-10 7-20 DIST: WFS COUNTY: WICHITA SHEET NO.: 88



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

POST TYPE AND SUPPORT FOUNDATION DETAILS				TYPE OF BARRIER MOUNTS	
WING CHANNEL (WC)	FLEXIBLE POSTS (YFLX, WFLX)		WEDGE ANCHOR SYSTEMS		GUARD FENCE ATTACHMENT
GND	GND	SRF	WAS	WAP	GF1
	EMBEDDED		SURFACE MOUNT		
<b>NOTES</b> 1. Embedded Wing Channel (WC) post option may be used for Type 2 Object Markers and Delineators only. 2. 1.12 lbs/ft steel per ASTM A 1011 SS Gr. 50, or ASTM A499.	<b>NOTES</b> 1. See "Flexible Delineator and Object Marker Posts" Material Producer List for approved devices. 2. Install per manufacturer's recommendations. 3. Post length may vary to meet field conditions. 4. When using yellow delineators with flexible posts to separate opposing direction of travel, such as centerline or median use, the flexible posts shall be yellow.		<b>NOTE</b> 1. Install per manufacturer's recommendations.		

TYPE OF BARRIER MOUNTS	
GUARD FENCE ATTACHMENT	CONCRETE TRAFFIC BARRIER (CTB)
<b>GENERAL NOTES</b> 1. Place delineators on a section of roadway at a consistent distance from the edge of pavement. 2. Where a restriction prevents consistent placement from the pavement edge, place the affected object markers in line with the innermost edge of the obstruction. 3. When Type 2 object markers and delineators are more than 8'-0" from the edge of the pavement, it may not be possible to maintain a height of approximately 4'-0". If this is the case, place the object marker or delineator as close to the desired height as possible. 4. Install all delineators, object markers and barrier reflectors in accordance with the manufacturer's recommendation. 5. Barrier reflectors should be installed a minimum of 18 inches above the edge of the pavement surface. 6. Diagonal stripes on Type 3 object markers shall slope down toward the intended travel lane.	

TYPES 1,3, AND 4 OBJECT MARKERS AND CHEVRONS
<b>NOTE</b> Mounting at 4 feet to the bottom of the chevron is permitted for chevrons that will not exceed a height of 6'-6" to the top of the chevron (sizes 24" x 30" and smaller)

CHEVRONS AND ONE DIRECTION LARGE ARROW SIGN
<b>NOTE</b> Chevrons 30" x 36" and larger shall be mounted at a height of 7' to the bottom of the chevron. Chevron sign and ONE DIRECTION LARGE ARROW sign (W1-9T) shall be installed per SMD standard sheets and paid under item 644.

DELINEATORS AND TYPE 2 OBJECT MARKERS
<b>NOTE</b> See general notes 1, 2 and 3.

Texas Department of Transportation

Traffic Safety Division Standard

## DELINEATOR & OBJECT MARKER INSTALLATION

### D & OM(2)-20

FILE: dom2-20.dgn	DNR TxDOT	CR: TxDOT	DNR TxDOT	CR: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	<b>0156 12</b>		<b>020</b>	<b>SS 447</b>
10-09 3-15	DIST	COUNTY		SHEET NO.
4-10 7-20	<b>WFS</b>	<b>WICHITA</b>		<b>89</b>


DATE: 09/18/2023 08:25 AM  
 FILE: DOCUMENT NAME

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

### MINIMUM WARNING DEVICES AT CURVES WITH ADVISORY SPEEDS

Amount by which Advisory Speed is less than Posted Speed	Curve Advisory Speed	
	Turn (30 MPH or less)	Curve (35 MPH or more)
5 MPH & 10 MPH	• RPMs	• RPMs
15 MPH & 20 MPH	• RPMs and One Direction Large Arrow sign	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons.
25 MPH & more	• RPMs and Chevrons; or • RPMs and One Direction Large Arrow sign where geometric conditions or roadside obstacles prevent the installation of chevrons	• RPMs and Chevrons


### SUGGESTED SPACING FOR DELINEATORS ON HORIZONTAL CURVES

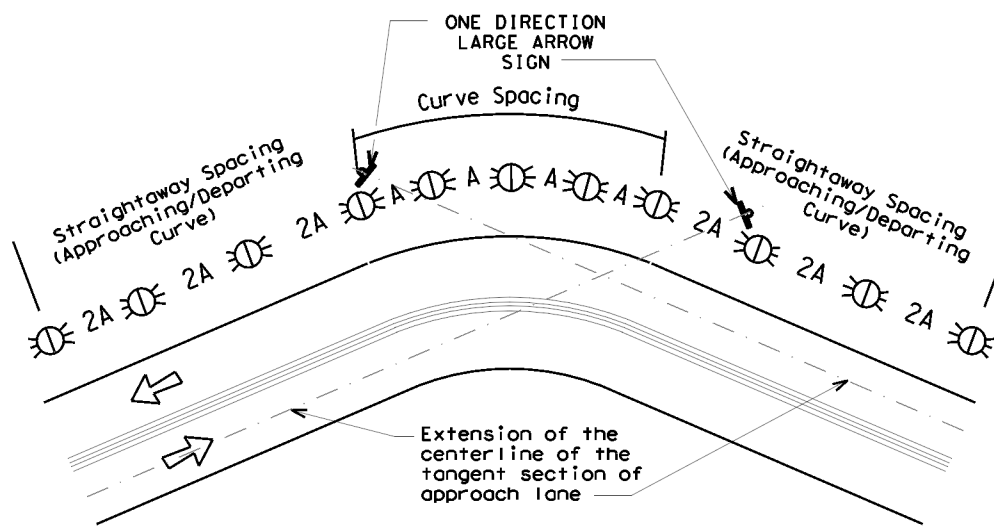

**NOTE**

ONE DIRECTION LARGE ARROW (W1-6) sign should be located at approximately and perpendicular to the extension of the centerline of the tangent section of approach lane.

### SUGGESTED SPACING FOR CHEVRONS ON HORIZONTAL CURVES

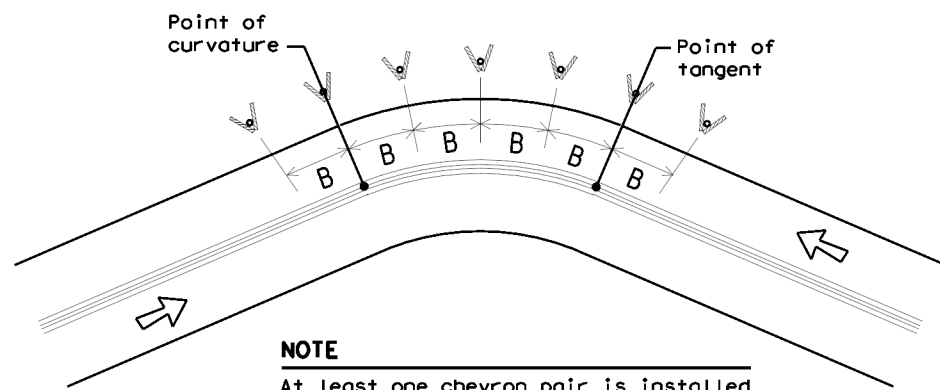

**NOTE**

At least one chevron pair is installed beyond the point of tangent in tangent section.

### DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS KNOWN				
Degree of Curve	FEET			
	Radius of Curve	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
		A	2A	B
1	5730	225	450	—
2	2865	160	320	—
3	1910	130	260	200
4	1433	110	220	160
5	1146	100	200	160
6	955	90	180	160
7	819	85	170	160
8	716	75	150	160
9	637	75	150	120
10	573	70	140	120
11	521	65	130	120
12	478	60	120	120
13	441	60	120	120
14	409	55	110	80
15	382	55	110	80
16	358	55	110	80
19	302	50	100	80
23	249	40	80	80
29	198	35	70	40
38	151	30	60	40
57	101	20	40	40

Curve delineator approach and departure spacing should include 3 delineators spaced at 2A. This spacing should be used during design preparation or when the degree of curve is known.

### DELINEATOR AND CHEVRON SPACING

WHEN DEGREE OF CURVE OR RADIUS IS NOT KNOWN			
Advisory Speed (MPH)	Spacing in Curve	Spacing in Straightaway	Chevron Spacing in Curve
	A	2xA	B
65	130	260	200
60	110	220	160
55	100	200	160
50	85	170	160
45	75	150	120
40	70	140	120
35	60	120	120
30	55	110	80
25	50	100	80
20	40	80	80
15	35	70	40

If the degree of curve is not known, delineator spacing may be determined based on the Advisory Speed of the curve. Use the delineator curve spacing for each Advisory Speed (MPH).

### DELINEATOR AND OBJECT MARKER APPLICATION AND SPACING

CONDITION	REQUIRED TREATMENT	MINIMUM SPACING
Frwy./Exp. Tangent	RPMs	See PM-series and FPM-series standard sheets
Frwy./Exp. Curve	Single delineators on right side	See delineator spacing table
Frwy/Exp. Ramp	Single delineators on at least one side of ramp (should be on outside of curves) (see Detail 3 on D&OM(4))	100 feet on ramp tangents Use delineator spacing table for ramp curves ("straightway spacing" does not apply to ramp curves)
Acceleration/Deceleration Lane	Double delineators (see Detail 3 on D&OM(4))	100 feet (See Detail 3 on D & OM (4))
Truck Escape Ramp	Single red delineators on both sides	50 feet
Bridge Rail (steel or concrete) and Metal Beam Guard Fence	Bi-Directional Delineators when undivided with one lane each direction Single Delineators when multiple lanes each direction	Equal spacing (100' max) but not less than 3 delineators
Concrete Traffic Barrier (CTB) or Steel Traffic Barrier	Barrier reflectors matching the color of the edge line	Equal spacing 100' max
Cable Barrier	Reflectors matching the color of the edge line	Every 5th cable barrier post (up to 100' max)
Guard Rail Terminus/Impact Head	Divided highway - Object marker on approach end Undivided 2-lane highways - Object marker on approach and departure end	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5) and D & OM (6)
Bridges with no Approach Rail	Type 3 Object Marker (OM-3) at end of rail and 3 single delineators approaching rail	See D & OM(5)
Reduced Width Approaches to Bridge Rail	Type 2 and Type 3 Object Markers (OM-3) and 3 single delineators approaching bridge	Requires reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end See D & OM (5)
Culverts without MBGF	Type 2 Object Markers	See Detail 2 on D & OM(4)
Crossovers	Double yellow delineators and RPMs	See Detail 1 on D & OM (4)
Pavement Narrowing (lane merge) on Freeways/Expressway	Single delineators adjacent to affected lane for full length of transition	100 feet

**NOTES**

- Unless indicated otherwise, the delineator or barrier reflector color shall conform to the color of the pavement edge line on the side of the road where the delineators or barrier reflectors are placed.
- Barrier reflectors may be used to replace required delineators.
- Single red delineators may be mounted on the back side of delineator posts for wrong way driver applications

LEGEND	
	Bi-directional Delineator
	Delineator
	Sign

Texas Department of Transportation  
Traffic Safety Division Standard

## DELINEATOR & OBJECT MARKER PLACEMENT DETAILS

### D & OM(3)-20


FILE: dom3-20.dgn	DNR TXDOT	CR: TXDOT	DNR TXDOT	CR: TXDOT
© TXDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS		<b>0156 12</b>	<b>020</b>	<b>SS 447</b>
3-15 8-15	DIST	COUNTY	SHEET NO.	
8-15 7-20	<b>WFS</b>	<b>WICHITA</b>	<b>90</b>	

DATE: 09/18/2023 08:25 AM  
 FILE: DOCUMENT NAME

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE: DATE TIME  
FILE: DOCUMENT NAME

**CROSSOVERS**

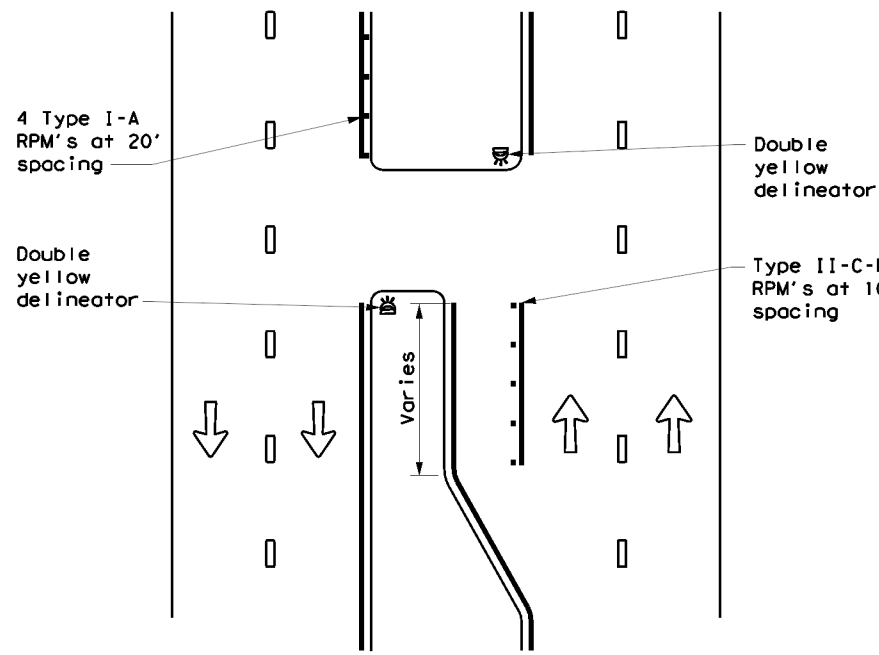


**DETAIL 1**

**FOR CULVERTS WITHOUT MBGF**

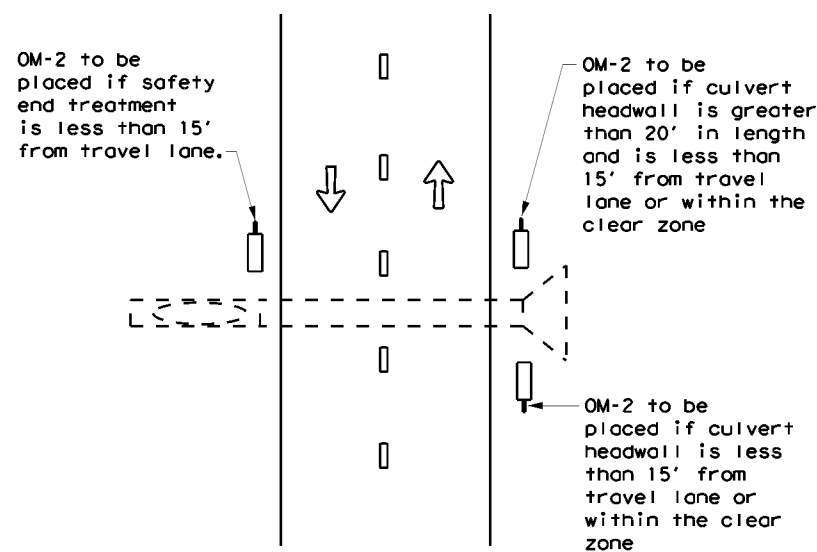


**DETAIL 2**

**FREEWAY DELINEATION FOR RAMPS AND ACCELERATION/DECELERATION LANES**

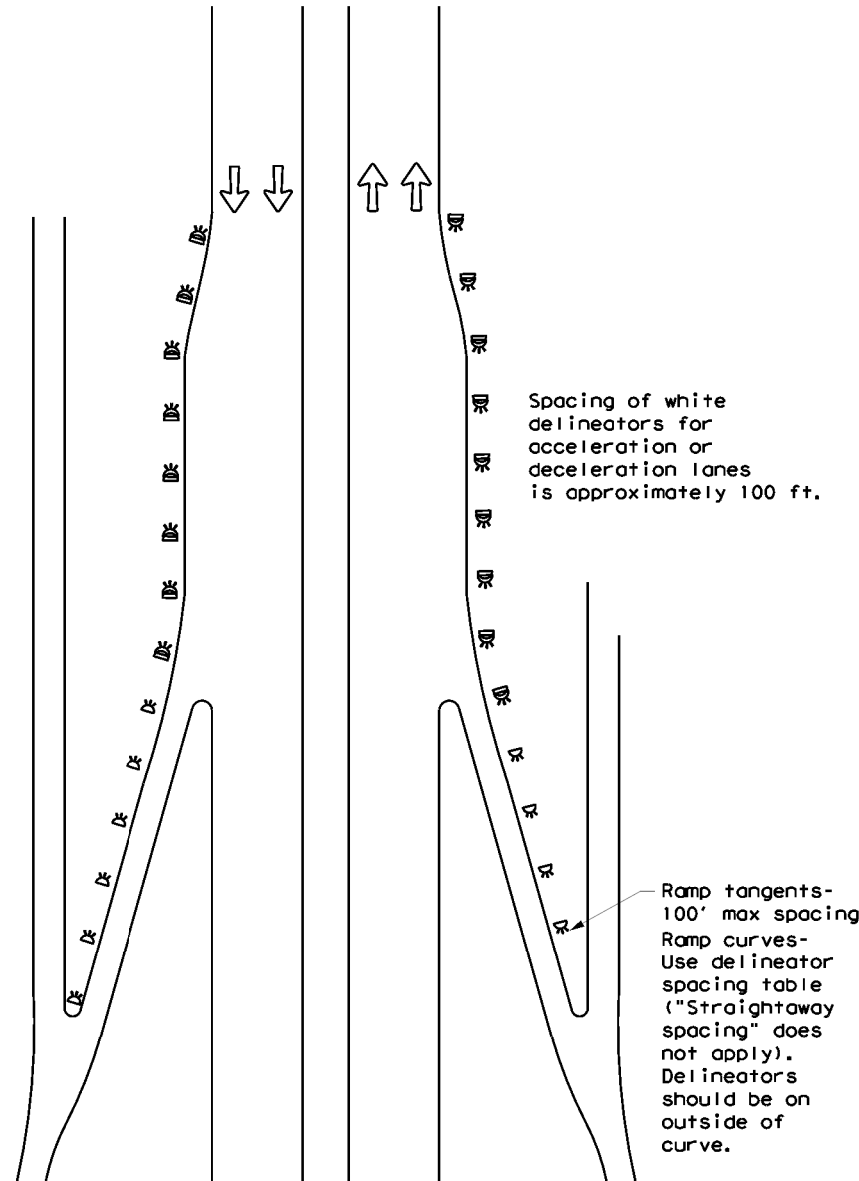


**DETAIL 3**

**TYPICAL APPLICATION OF DEAD END BARRICADE**

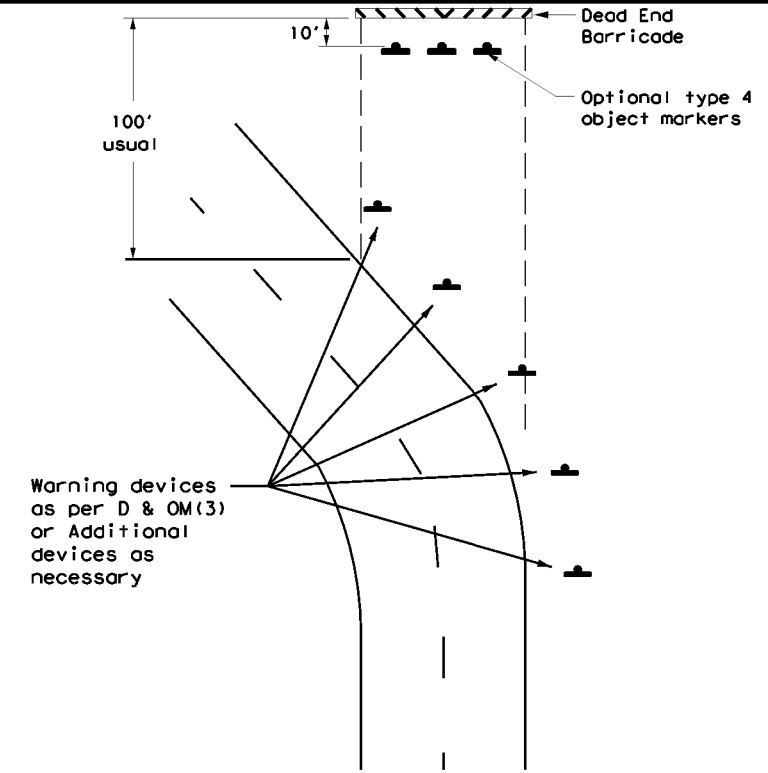

**DETAIL 4**

**TYPICAL DEAD END BARRICADE INSTALLATION**

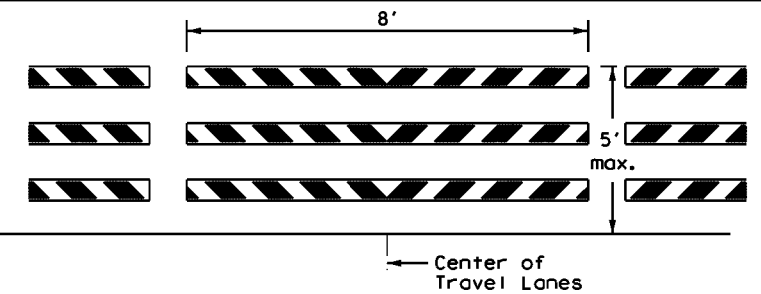

**NOTES**

- Barricade striping shall be red and white reflective sheeting for all permanent road closures.
- Barricade striping is red and white sloping toward the center of the roadway.
- Type 3 Barricade Supports should be anchored to soil or pavement as described in compliant Work Zone Traffic Control Devices List, section D.2.f and D.2.g.

**DETAIL 5**

LEGEND	
	Bidirectional Delineator
	Delineator
	OM-3
	Barricade
	Sign
	OM-2
	Double Delineator




**DELINEATOR & OBJECT MARKER PLACEMENT DETAILS**

**D & OM(4) -20**

FILE: dom4-20.dgn	DNR TxDOT	CR: TxDOT	DNR TxDOT	CR: TxDOT
© TxDOT August 2004	CONT	SECT	JOB	HIGHWAY
REVISIONS	0156 12		020	SS 447
3-15	DIST	COUNTY		SHEET NO.
7-20	WFS	WICHITA		91


**TWO-WAY, TWO LANE ROADWAY  
WITH REDUCED WIDTH APPROACH RAIL**

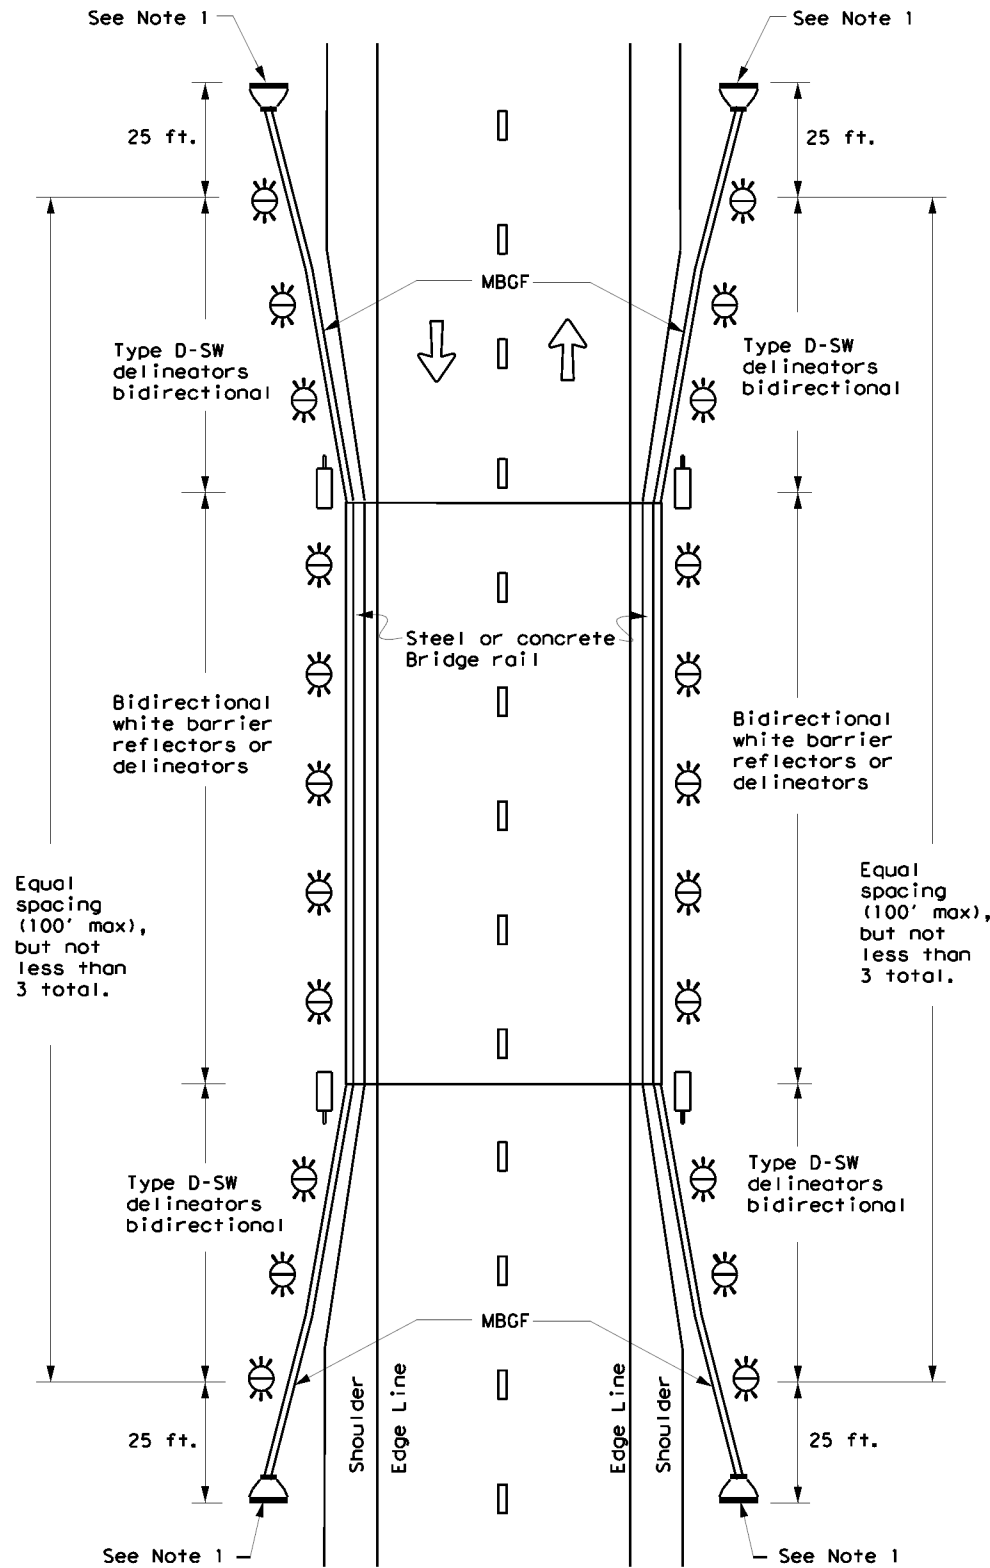

**NOTE:**

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.


**TWO-WAY, TWO LANE ROADWAY  
WITH METAL BEAM GUARD FENCE (MBGF)**

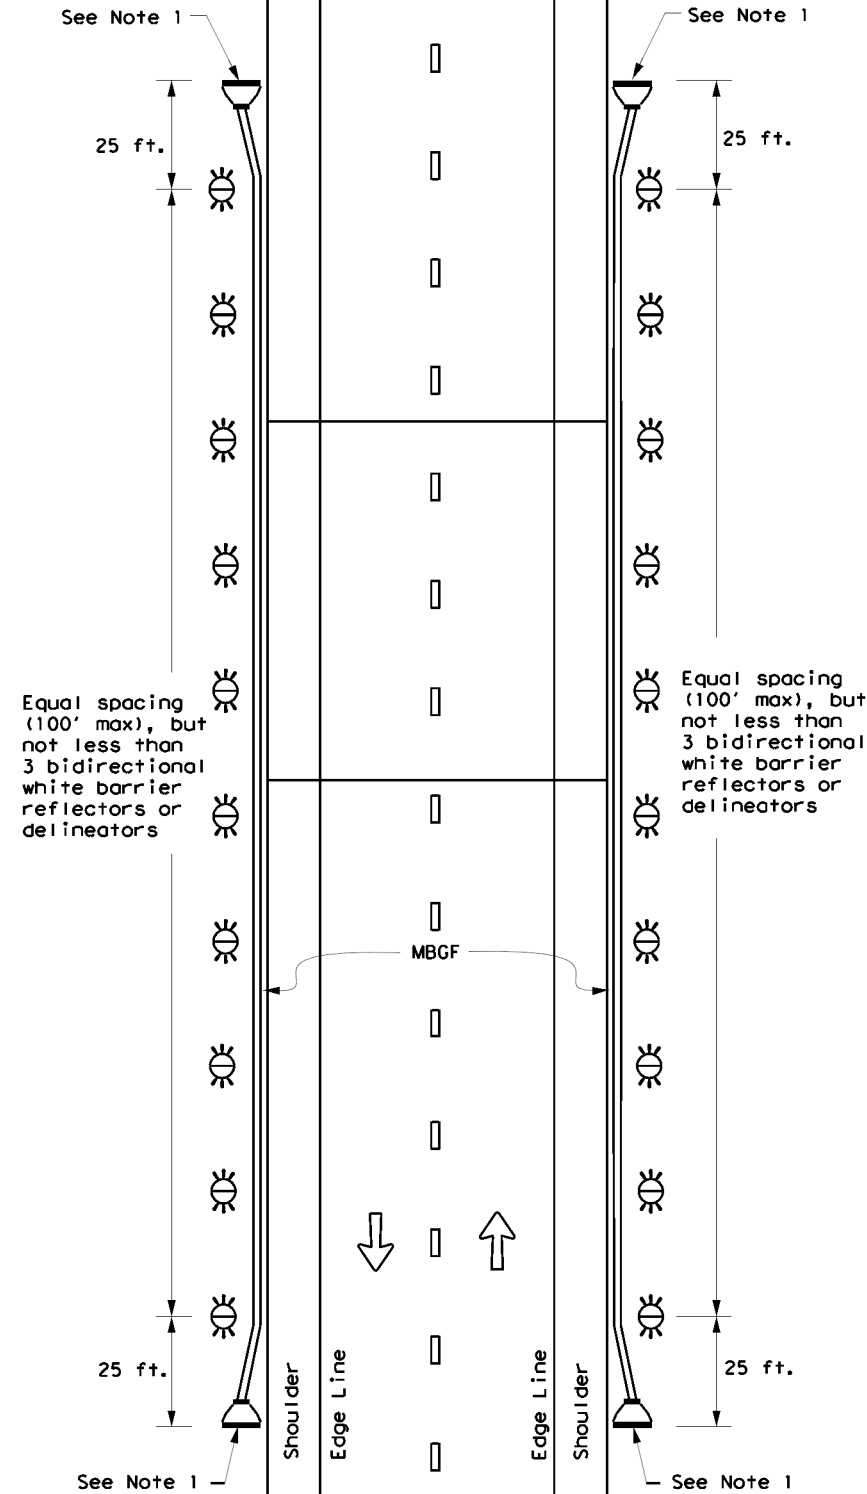

**NOTE:**

1. Terminal ends require reflective sheeting provided by manufacturer per D & OM (VIA) or a Type 3 Object Marker (OM-3) in front of the terminal end.

**TWO-WAY, TWO LANE ROADWAY  
BRIDGE WITH NO APPROACH RAIL**

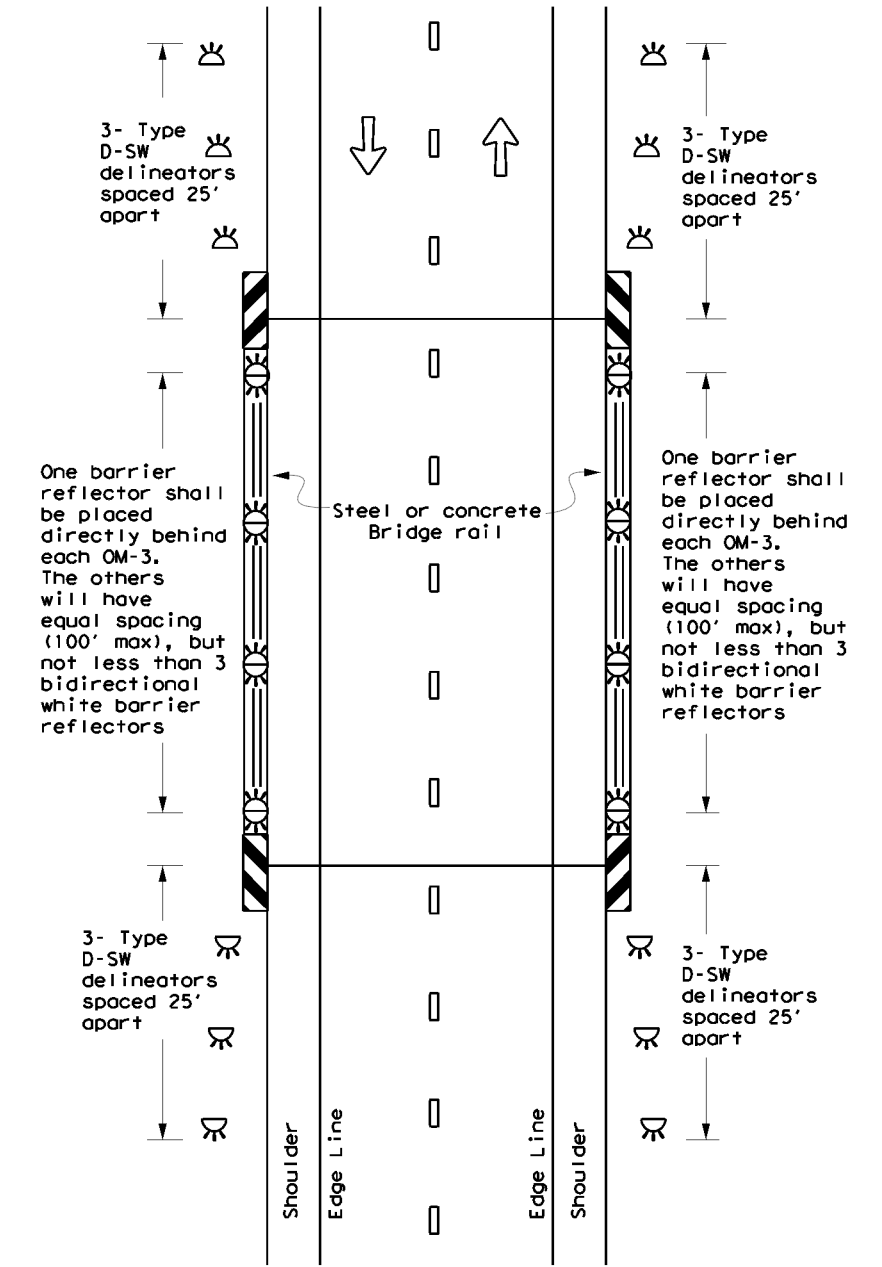

**LEGEND**

	Bidirectional Delineator
	Delineator
	OM-3
	OM-2
	Terminal End
	Traffic Flow

Texas Department of Transportation  
Traffic Safety Division Standard

**DELINEATOR &  
OBJECT MARKER  
PLACEMENT DETAILS**

**D & OM(5) - 20**








FILE: dom5-20.dgn	DW: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
© TxDOT August 2015	CONT	SECT	JOB	HIGHWAY
REVISIONS	<b>0156 12</b>	<b>020</b>	<b>SS 447</b>	
7-20	DIST	COUNTY	SHEET NO.	
	<b>WFS</b>	<b>WICHITA</b>	<b>92</b>	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: DATE TIME  
FILE: DOCUMENT NAME



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

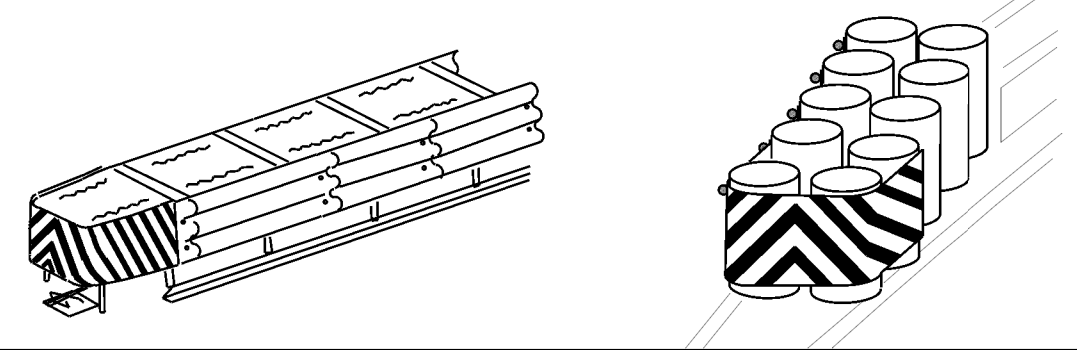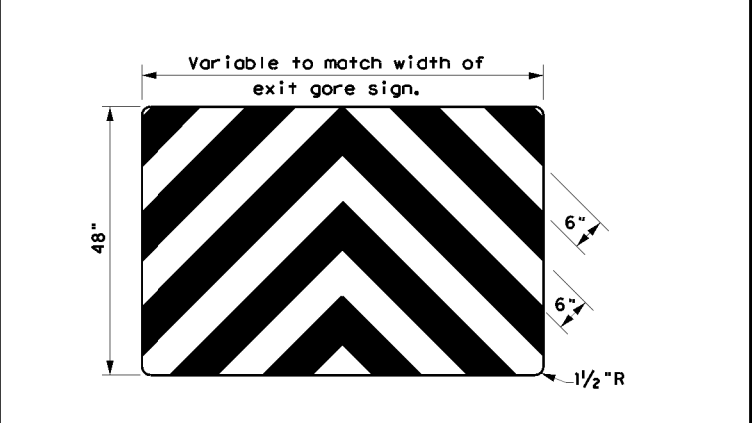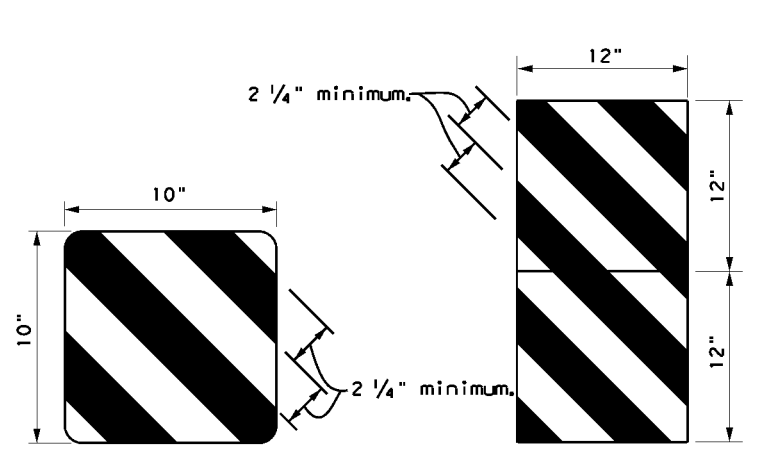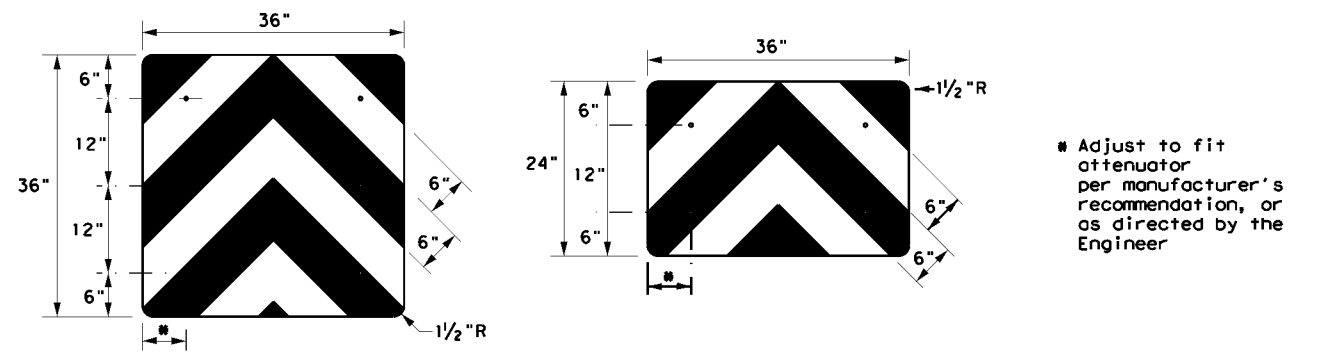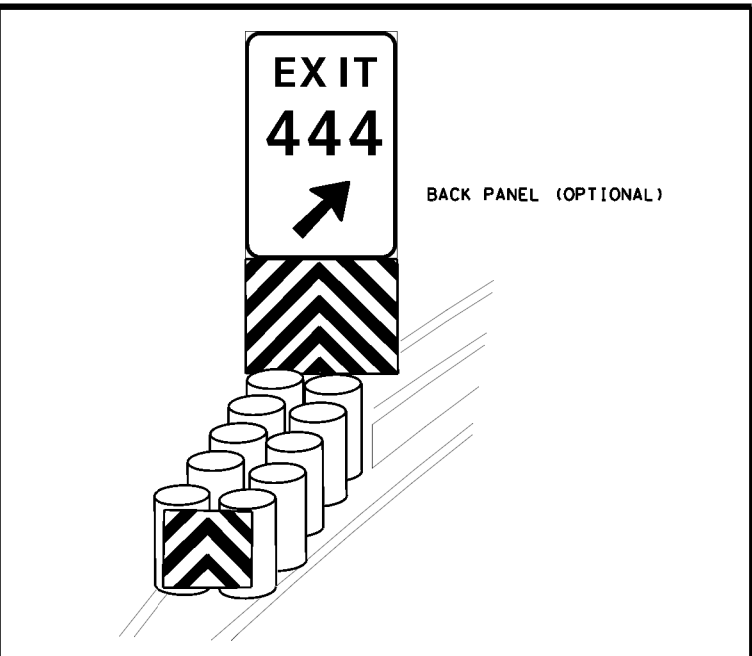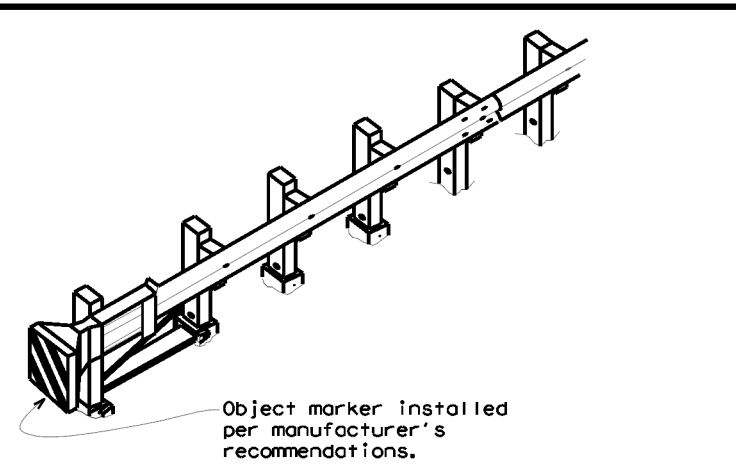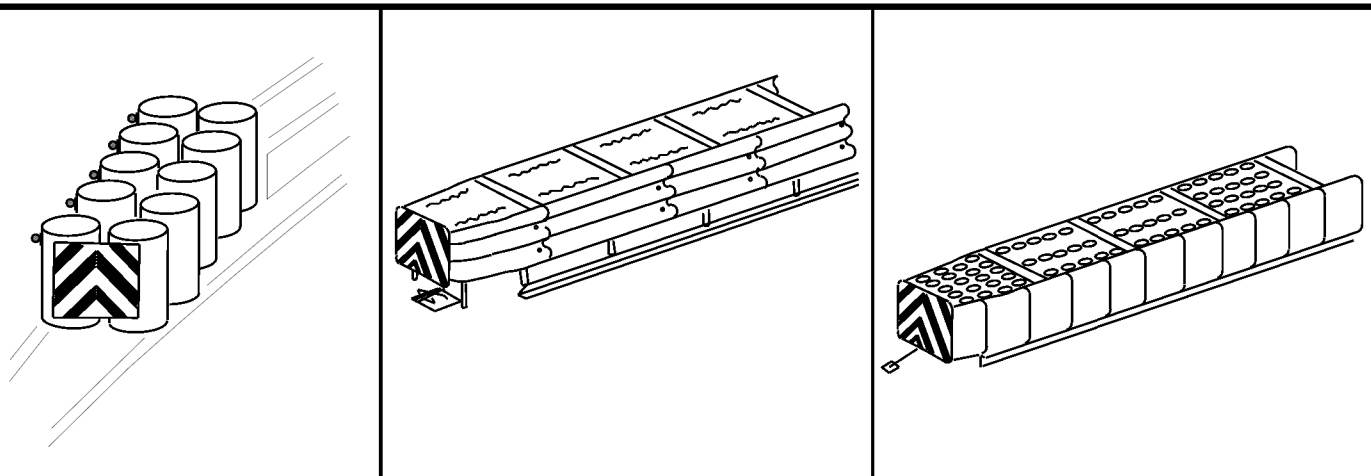


OBJECT MARKERS SMALLER THAN 3 FT<sup>2</sup>

**NOTES**

- Object Markers shall conform to the Texas MUTCD and meet the color and reflectivity requirement of Department Material Specification DMS 8300. Background shall be yellow reflective sheeting (Type B or C) and Chevron shall be black.
- Object Markers may be fabricated from adhesive backed reflective sheeting applied directly to guardrail end treatment, or applied directly to an "end cap" as per the manufacturer's recommendation. Direct applied sheeting shall provide a smooth surface and have no wrinkles, air bubbles, cuts or tears. A radius at the corners is not required for direct applied sheeting.
- Object Marker size may be reduced to fit smaller devices. Width of alternating black and yellow stripes are typically 6". Object Markers smaller than 3ft may have reduced width stripes of a minimum of 2 1/4".
- Pop rivets, screws, or nuts and bolts may be used to attach object markers and reflectors. Holes, slots or other openings may be cut or drilled through object markers to allow cable or other attachments.
- Object Marker at nose of attenuator is subsidiary to the attenuator.
- See D & OM (1-4) for required barrier reflectors.

**NOTES**

- Spacing should be adjusted to attach through centerline of drum, per attenuator manufacturer's recommendation, or as directed by the Engineer.
- Mounting should be flush with top of attenuator. Minimum size 96" x 24".

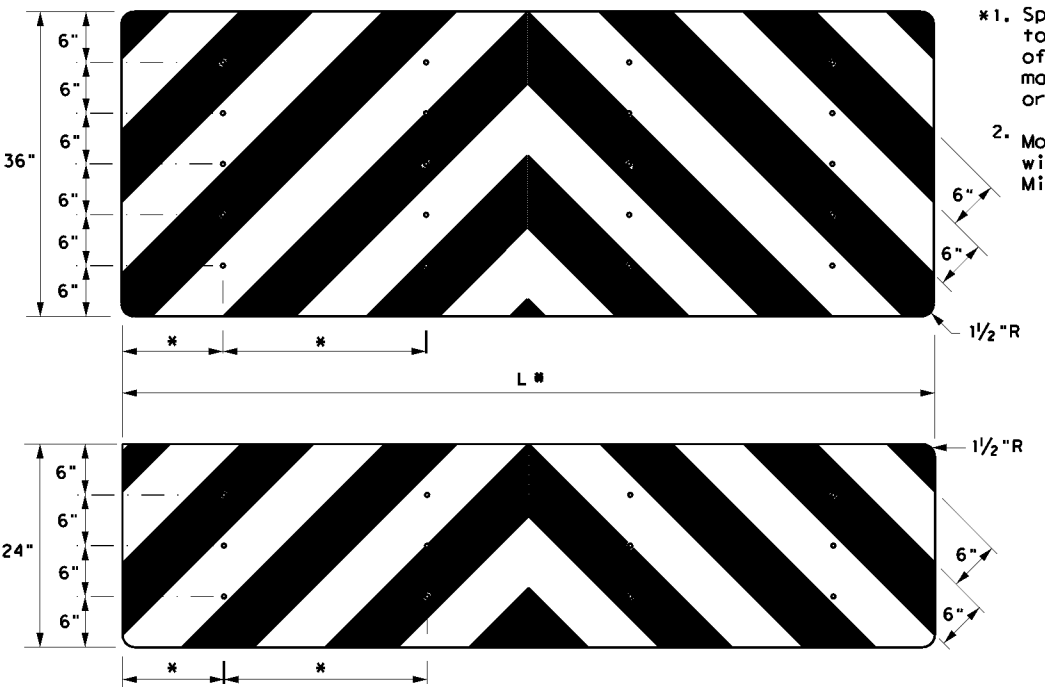

DATE: DATE TIME  
FILE: DOCUMENT NAME

		Traffic Safety Division Standard	
<b>DELINEATOR &amp; OBJECT MARKER FOR VEHICLE IMPACT ATTENUATORS</b> <b>D &amp; OM(VIA)-20</b>			
FILE: domv ia20.dgn	DNR TxDOT	CR: TxDOT	DNR TxDOT
© TxDOT December 1989	CONT SECT	JOB	HIGHWAY
REVISIONS		0156 12	020 SS 447
4-92 8-04	DIST	COUNTY	SHEET NO.
8-95 3-15	WFS	WICHITA	94
4-98 7-20			



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

## SIGN SUPPORT DESCRIPTIVE CODES

(Descriptive Codes correspond to project estimate and quantities sheets)

SM RD SGN ASSM TY XXXXX(X)XX(X-XXXX)

### Post Type

- FRP = Fiberglass Reinforced Plastic Pipe (see SMD(FRP))
- TWT = Thin-Walled Tubing (see SMD(TWT))
- 10BWG = 10 BWG Tubing (see SMD(SLIP-1) to (SLIP-3))
- S80 = Schedule 80 Pipe (see SMD(SLIP-1) to (SLIP-3))

### Number of Posts (1 or 2)


### Anchor Type

- UA = Universal Anchor - Concreted (see SMD(FRP) and (TWT))
- UB = Universal Anchor - Bolted down (see SMD(FRP) and (TWT))
- WS = Wedge Anchor Steel - (see SMD(TWT))
- WP = Wedge Anchor Plastic (see SMD(TWT))
- SA = Slipbase - Concreted (see SMD(SLIP-1) to (SLIP-3))
- SB = Slipbase - Bolted Down (see SMD(SLIP-1) to (SLIP-3))

### Sign Mounting Designation

- P = Prefab. "Plain" (see SMD(SLIP-1) to (SLIP-3), (TWT), (FRP))
- T = Prefab. "T" (see SMD(SLIP-1) to (SLIP-3), (TWT))
- U = Prefab. "U" (see SMD(SLIP-1) to (SLIP-3))
- IF REQUIRED
- 1EXT or 2EXT = Number of Extensions (see SMD(SLIP-1) to (SLIP-3), (TWT))
- BM = Extruded Wind Beam (see SMD(SLIP-1) to (SLIP-3))
- WC = 1.12 #/ft Wing Channel (see SMD(SLIP-1) to (SLIP-3))
- EXAL = Extruded Aluminum Sign Panels (see SMD(SLIP-3))


## REQUIRED CLEARANCE FOR BREAKAWAY SUPPORT

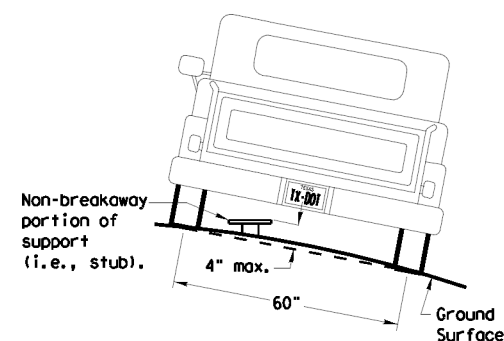

To avoid vehicle undercarriage snagging, any substantial remains of a breakaway support, when it is broken away, should not project more than 4 inches above a 60-inch chord (i.e., typical space between wheel paths).


## SIGN LOCATION

### PAVED SHOULDERS

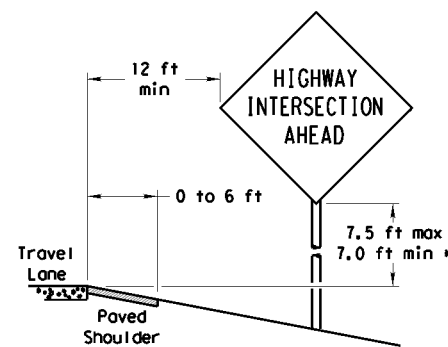

#### LESS THAN 6 FT. WIDE


When the shoulder is 6 ft. or less in width, the sign must be placed at least 12 ft. from the edge of the travel lane.

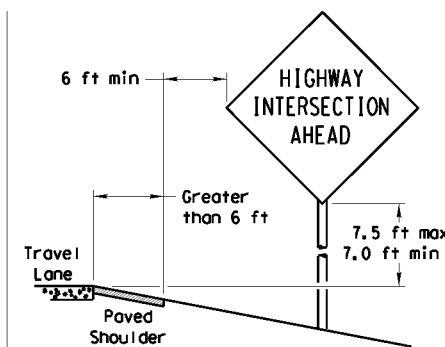

#### GREATER THAN 6 FT. WIDE


When the shoulder is greater than 6 ft in width, the sign must be placed at least 6 ft. from the edge of the shoulder.

### T-INTERSECTION

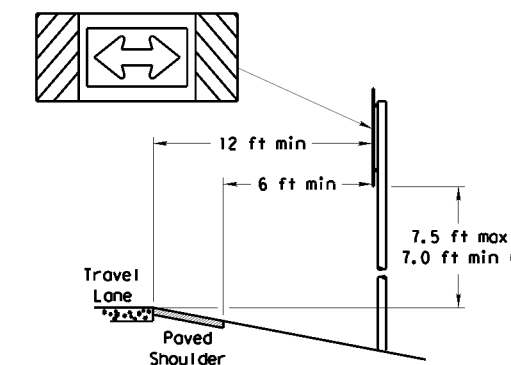


When this sign is needed at the end of a two-lane, two way roadway, the right edge of the sign should be in line with the centerline of the roadway. Place as close to ROW as practical.


No more than 2 sign posts should be located within a 7 ft. circle.

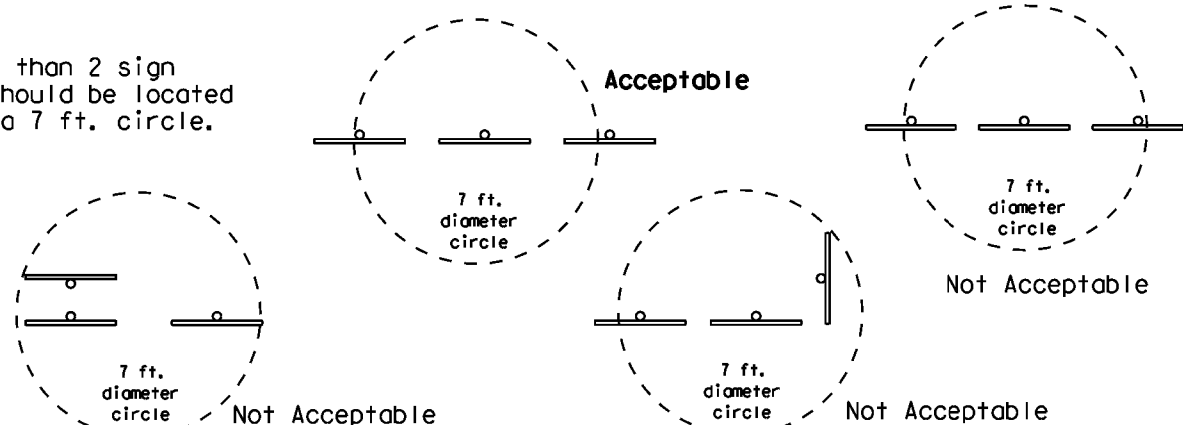

### BEHIND BARRIER

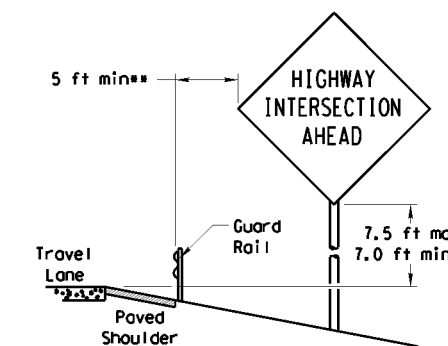


#### BEHIND GUARDRAIL

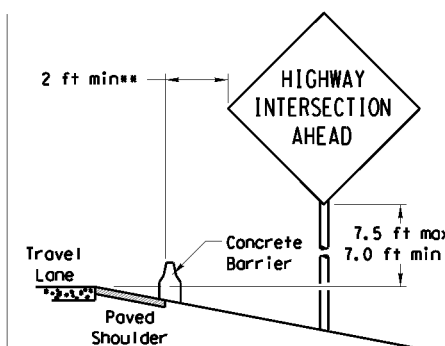

#### BEHIND CONCRETE BARRIER

\*\*Sign clearance based on distance required for proper guard rail or concrete barrier performance.

## TYPICAL SIGN ATTACHMENT DETAIL

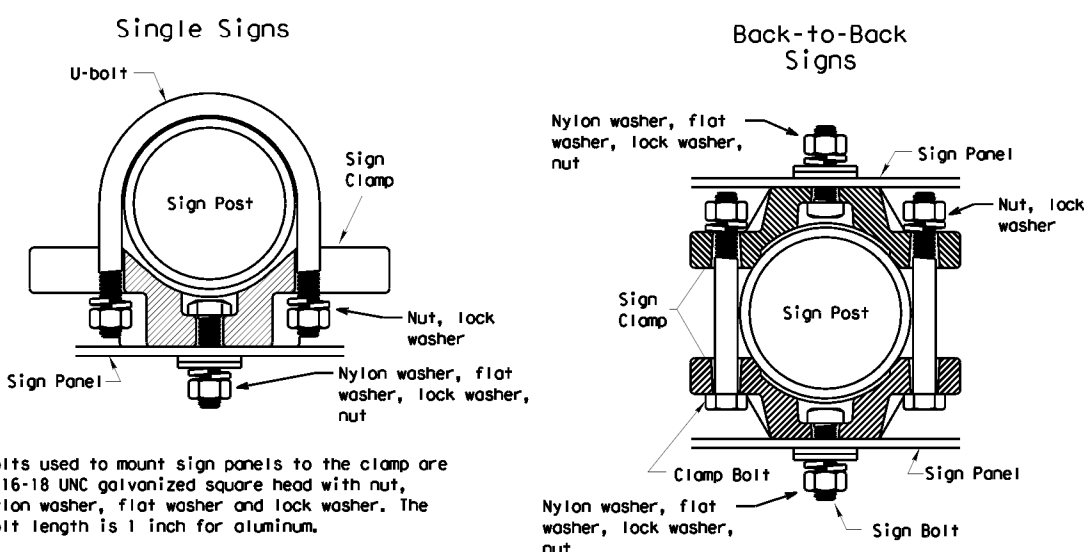


Bolts used to mount sign panels to the clamp are 5/16-18 UNC galvanized square head with nut, nylon washer, flat washer and lock washer. The bolt length is 1 inch for aluminum.

When two sign clamps are used to mount signs back-to-back, use a 5/16-18 UNC galvanized hex head per ASTM A307 with nut and helical-spring lock washer. The approximate bolt lengths for various post sizes and sign clamp types are given in the table at right. The bolt length may need to be adjusted depending upon field conditions.

Sign clamps may be either the specific size clamp or the universal clamp.


Pipe Diameter	Approximate Bolt Length	
	Specific Clamp	Universal Clamp
2" nominal	3"	3 or 3 1/2"
2 1/2" nominal	3 or 3 1/2"	3 1/2 or 4"
3" nominal	3 1/2 or 4"	4 1/2"

### SIGNS WITH PLAQUES

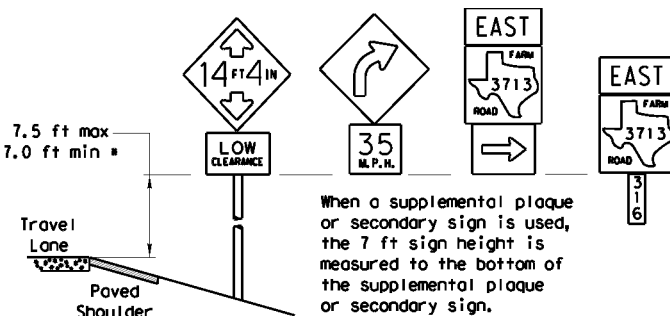


When a supplemental plaque or secondary sign is used, the 7 ft sign height is measured to the bottom of the supplemental plaque or secondary sign.

### CURB & GUTTER OR RAISED ISLAND

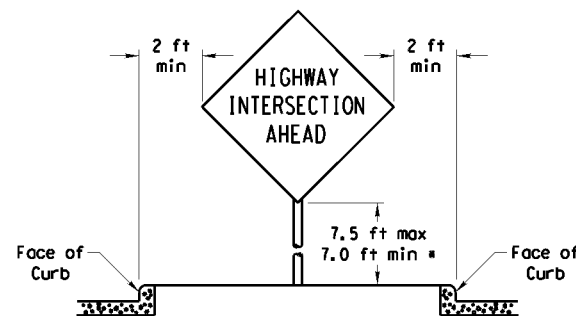

### RESTRICTED RIGHT-OF-WAY (When 6 ft min. is not possible.)

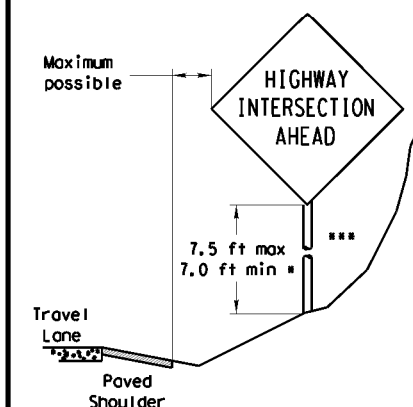

Right-of-way restrictions may be created by rocks, water, vegetation, forest, buildings, a narrow island, or other factors.

In situations where a lateral restriction prevents the minimum horizontal clearance from the edge of the travel lane, signs should be placed as far from the travel lane as practical.

\*\*\* Post may be shorter if protected by guardrail or if Engineer determines the post could not be hit due to extreme slope.

Signs shall be mounted using the following condition that results in the greatest sign elevation:

- (1) a minimum of 7 to a maximum of 7.5 feet above the edge of the travel lane or
- (2) a minimum of 7 to a maximum of 7.5 feet above the grade at the base of the support when sign is installed on the backslope.

The maximum values may be increased when directed by the Engineer.

See the Traffic Operations Division website for detailed drawings of sign clamps, Triangular Slipbase System components and Wedge Anchor System components.

The website address is:  
<http://www.txdot.gov/publications/traffic.htm>

Texas Department of Transportation  
Traffic Operations Division

## SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS GENERAL NOTES & DETAILS

SMD(GEN)-08


© TxDOT July 2002		DNR TxDOT	CR TxDOT	DW TxDOT	CR TxDOT
REV	REVISIONS	CONT	SECT	JOB	HIGHWAY
9-08		0156	12	020	SS 447
		DIST		COUNTY	SHEET NO.
		03		WICHITA	96

DATE: FILE:



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

## TRIANGULAR SLIPBASE INSTALLATION GENERAL REQUIREMENTS

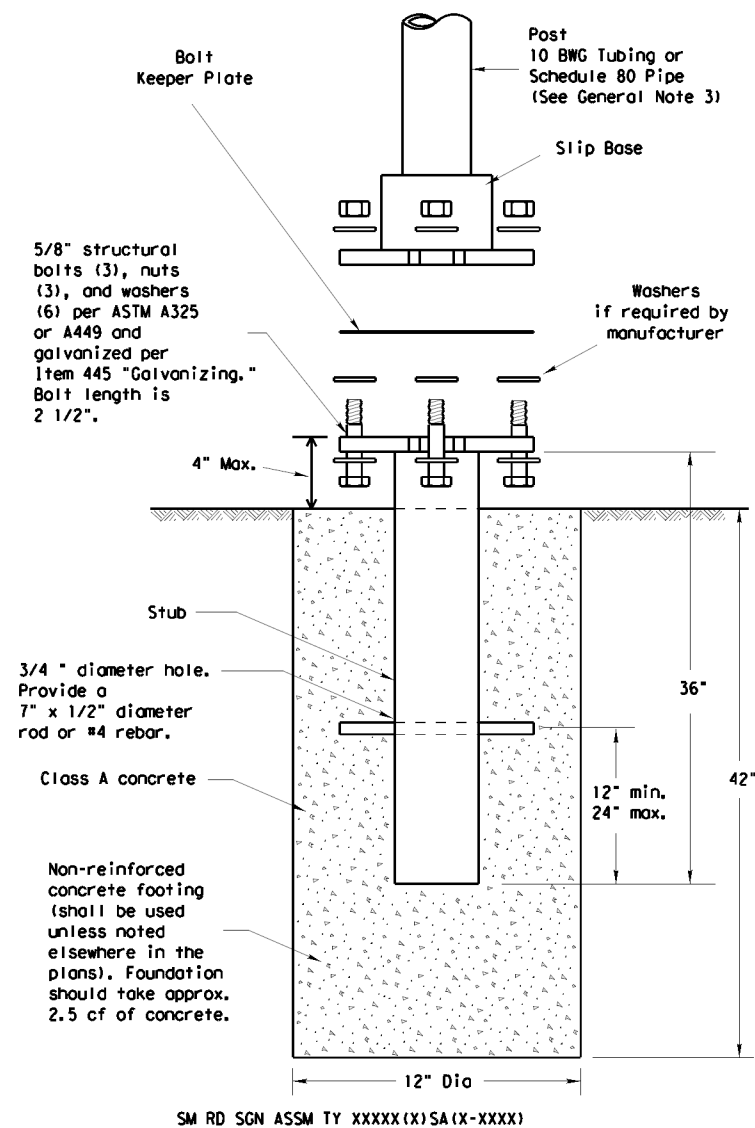

### NOTE

There are various devices approved for the Triangular Slipbase System. Please reference the Material Producer List for approved slip base systems. [http://www.txdot.gov/business/producer\\_list.htm](http://www.txdot.gov/business/producer_list.htm) The devices shall be installed per manufacturers' recommendations. Installation procedures shall be provided to the Engineer by Contractor.

### GENERAL NOTES:

- Slip base shall be permanently marked to indicate manufacturer. Method, design, and location of marking are subject to approval of the TxDOT Traffic Standards Engineer.
- Material used as post with this system shall conform to the following specifications:
  - 10 BWG Tubing (2.875" outside diameter)
    - 0.134" nominal wall thickness
    - Seamless or electric-resistance welded steel tubing or pipe
    - Steel shall be HSLAS Gr 55 per ASTM A1011 or ASTM A1008
    - Other steels may be used if they meet the following:
      - 55,000 PSI minimum yield strength
      - 70,000 PSI minimum tensile strength
      - 20% minimum elongation in 2"
    - Wall thickness (uncoated) shall be within the range of 0.122" to 0.138"
    - Outside diameter (uncoated) shall be within the range of 2.867" to 2.883"
    - Galvanization per ASTM A123 or ASTM A653 G210. For precoated steel tubing (ASTM A653), recoat tube outside diameter weld seam by metallizing with zinc wire per ASTM B833.
  - Schedule 80 Pipe (2.875" outside diameter)
    - 0.276" nominal wall thickness
    - Steel tubing per ASTM A500 Gr C
    - Other seamless or electric-resistance welded steel tubing or pipe with equivalent outside diameter and wall thickness may be used if they meet the following:
      - 46,000 PSI minimum yield strength
      - 62,000 PSI minimum tensile strength
      - 21% minimum elongation in 2"
    - Wall thickness (uncoated) shall be within the range of 0.248" to 0.304"
    - Outside diameter (uncoated) shall be within the range of 2.855" to 2.895"
    - Galvanization per ASTM A123
- See the Traffic Operations Division website for detailed drawings of sign clamps and Texas Universal Triangular Slipbase System components. The website address is: <http://www.txdot.gov/publications/traffic.htm>
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.

### ASSEMBLY PROCEDURE


#### Foundation

- Prepare 12-inch diameter by 42-inch deep hole. If solid rock is encountered, the depth of the foundation may be reduced such that it is embedded a minimum of 18 inches into the solid rock.
- The Engineer may permit batches of concrete less than 2 cubic yards to be mixed with a portable, motor-driven concrete mixer. For small placements less than 0.5 cubic yards, hand mixing in a suitable container may be allowed by Engineer. Concrete shall be Class A.
- Push the pipe end of the slip base stub into the center of the concrete. Rotate the stub back and forth while pushing it down into the concrete to assure good contact between the concrete and stub. Continue to work the stub into the concrete until it is between 2 to 4 inches above the ground.
- Plumb the stub. Allow a minimum of 4 days to set, unless otherwise directed by the Engineer.
- The triangular slipbase system is multidirectional and is designed to release when struck from any direction.

#### Support

- Cut support so that the bottom of the sign will be 7 to 7.5 feet above the edge of the travelway (i.e., edge of the closest lane) when slip plate is below the edge of pavement or 7 to 7.5 feet above slip plate when the slip plate is above the edge of the travelway. The cut shall be plumb and straight.
- Attach sign to support using connections shown. When multiple signs are installed on the same support, ensure the minimum clearance between each sign is maintained. See SMD(SLIP-2) for clearances based on sign types.

### CONCRETE ANCHOR

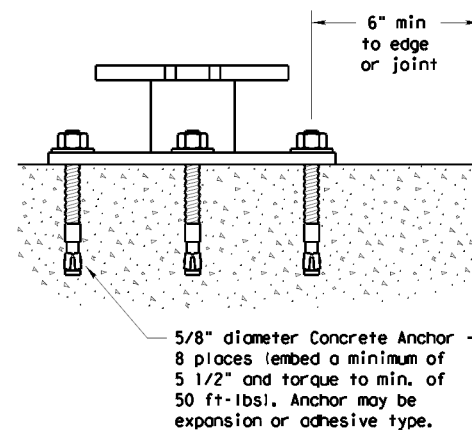

Concrete anchor consists of 5/8" diameter stud bolt with UNC series bolt threads on the upper end. Heavy hex nut per ASTM A563, and hardened washer per ASTM F436. The stud bolt shall have a minimum yield and ultimate tensile strength of 50 and 75 KSI, respectively. Nuts, bolts and washers shall be galvanized per Item 445, "Galvanizing." Adhesive type anchors shall have stud bolts installed with Type III epoxy per DMS-6100, "Epoxyes and Adhesives." Adhesive anchors may be loaded after adequate epoxy cure time per the manufacturer's recommendations. Top of bolt shall extend at least flush with top of the nut when installed. The anchor, when installed in 4000 psi normal-weight concrete with a 5 1/2" minimum embedment, shall have a minimum allowable tension and shear of 3900 and 3100 psi, respectively.

DATE:  
FILE:















**Texas Department of Transportation**  
Traffic Operations Division

## SIGN MOUNTING DETAILS SMALL ROADSIDE SIGNS TRIANGULAR SLIPBASE SYSTEM

**SMD(SLIP-1)-08**

© TxDOT July 2002		DNR: TxDOT	CK: TxDOT	DW: TxDOT	CK: TxDOT
<b>9-08</b>	REVISIONS				
	CONT	SECT	JOB	HIGHWAY	
	0156	12	020	SS 447	
	DIST	COUNTY		SHEET NO.	
	03	WICHITA		97	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

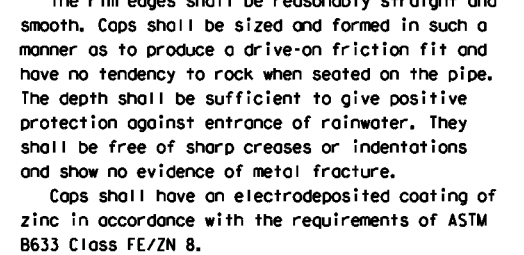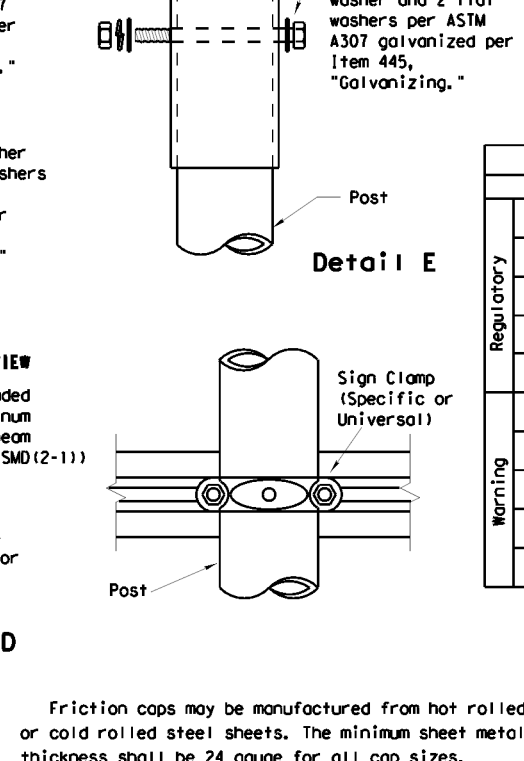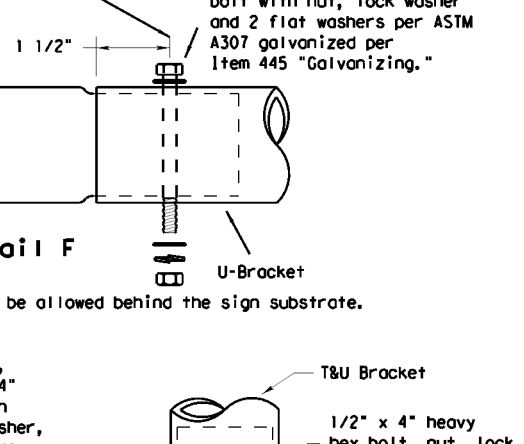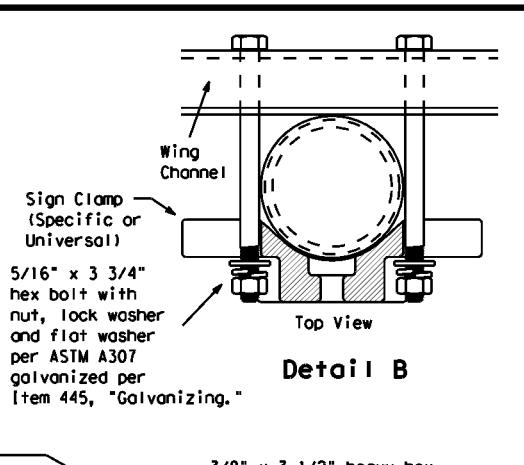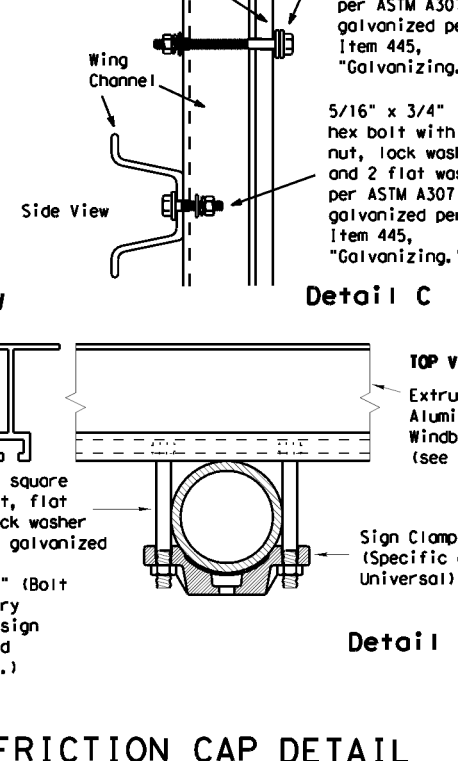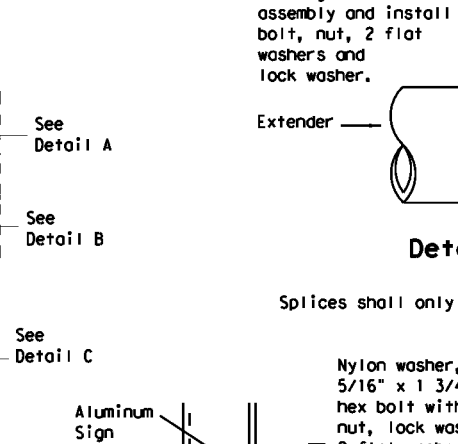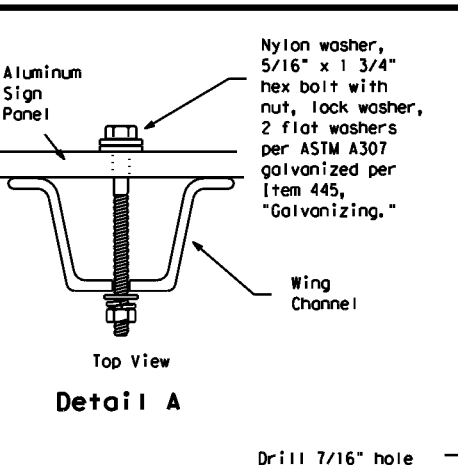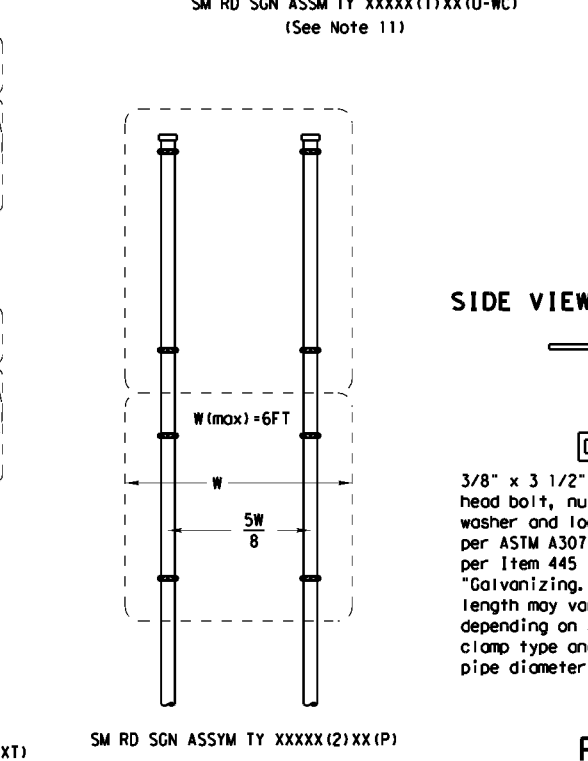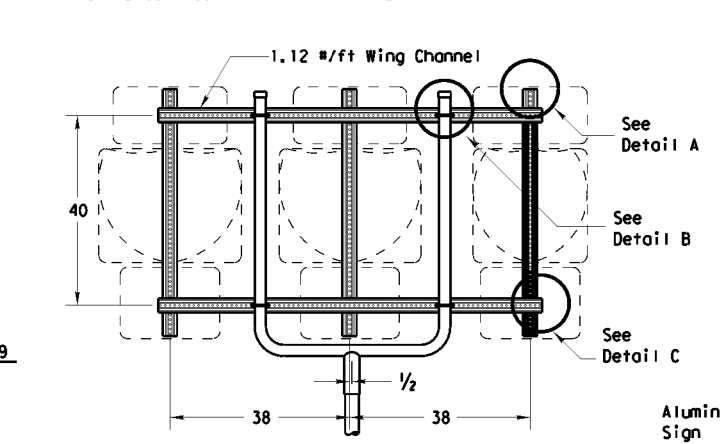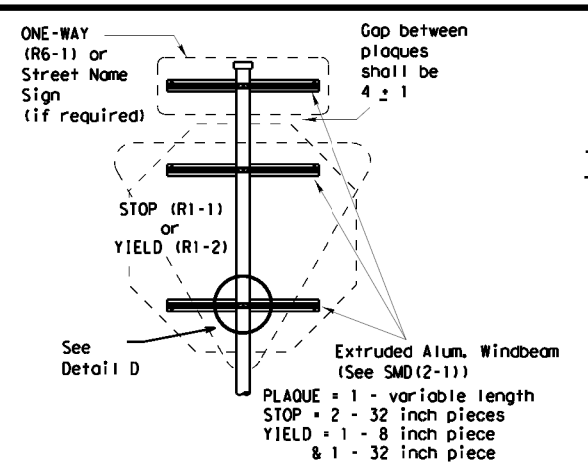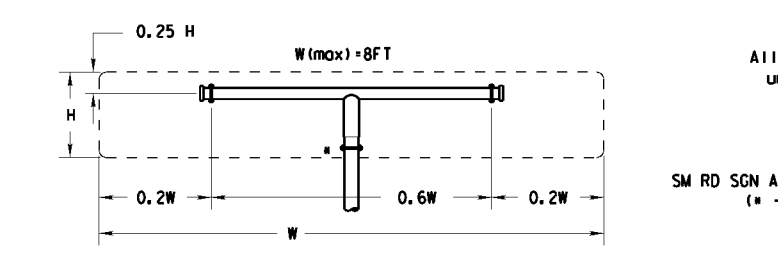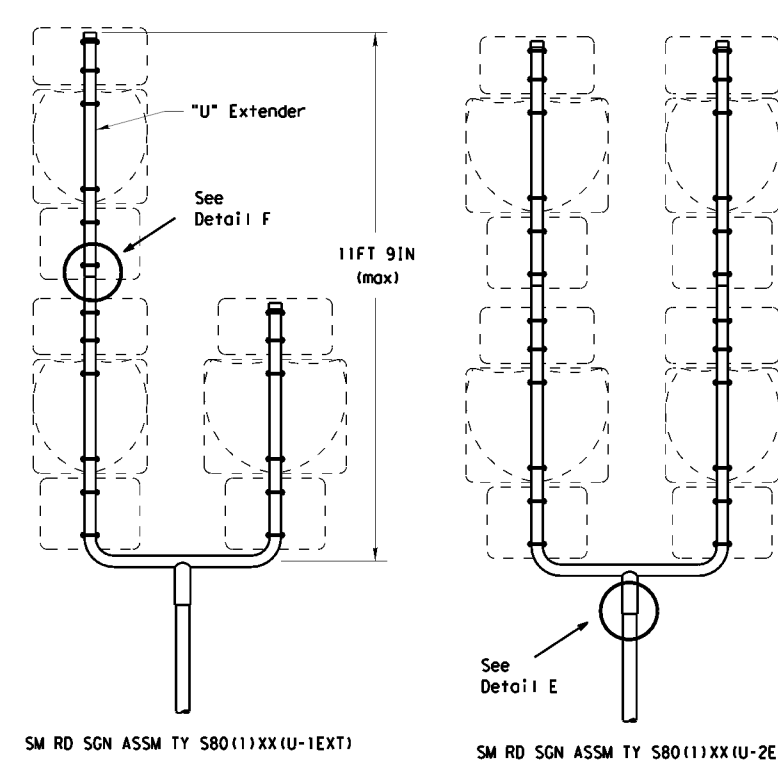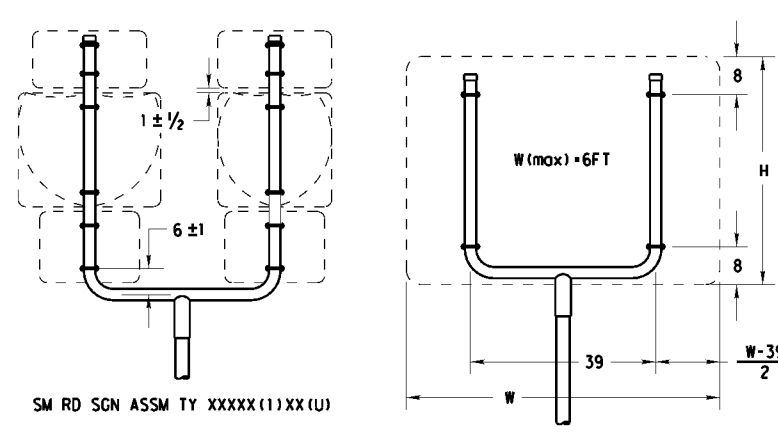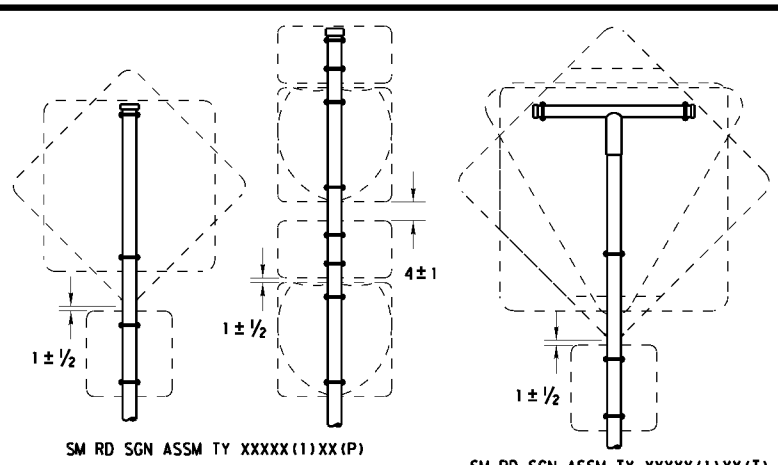

- GENERAL NOTES:**
1. 

SIGN SUPPORT	# OF POSTS	MAX. SIGN AREA
10 BWG	1	16 SF
10 BWG	2	32 SF
Sch 80	1	32 SF
Sch 80	2	64 SF
  2. The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
  3. Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
  4. Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
  5. Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
  6. For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
  7. When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
  8. Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
  9. Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
  10. Additional route markers may be added vertically, provided the total sign area does not exceed the maximum allowable amount per Note 1.
  11. Additional sign clamp required on the "T-bracket" post for 24 inch height signs. Place the clamp 3 inches above bottom of sign when possible.
  12. Post open ends shall be fitted with Friction Caps.
  13. Sign blanks shall be the sizes and shapes shown on the plans.

REQUIRED SUPPORT		
SIGN DESCRIPTION	SUPPORT	
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
Warning	48x60-inch signs	TY S80(1)XX(T)
	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)

**Texas Department of Transportation**  
Traffic Operations Division

**SIGN MOUNTING DETAILS**  
**SMALL ROADSIDE SIGNS**  
**TRIANGULAR SLIPBASE SYSTEM**  
**SMD(SLIP-2)-08**




© TxDOT July 2002

REV	DATE	BY	CHKD	APP'D
9-08	01/56	12	020	SS 447
	DIST	COUNTY		SHEET NO.
	03	WICHITA		96

DATE:  
FILE:








DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:  
FILE:

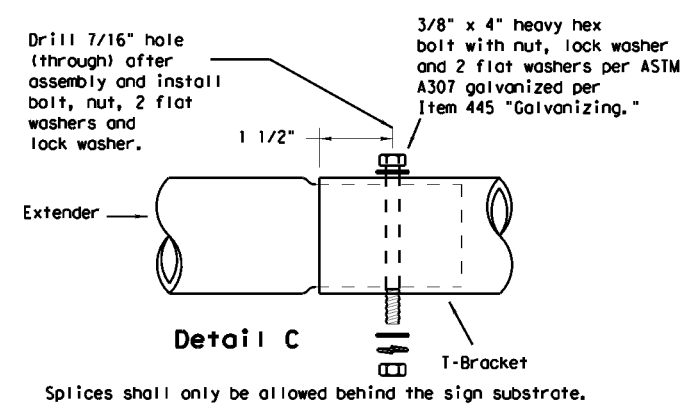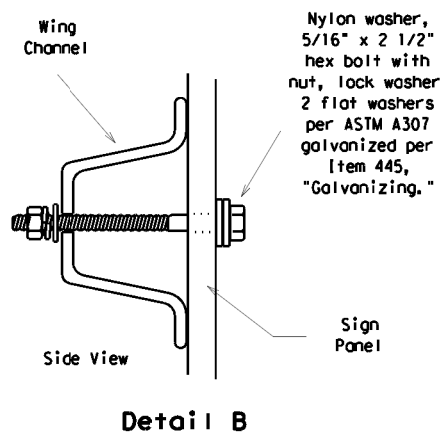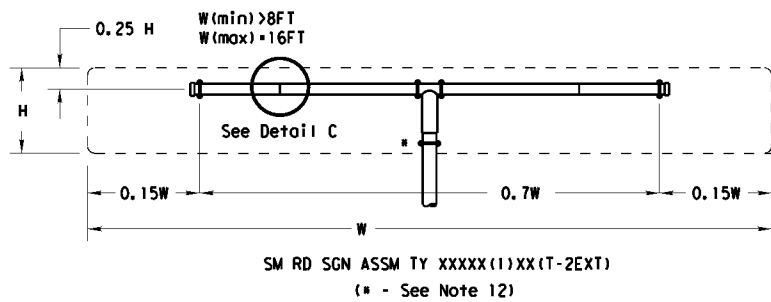

GENERAL NOTES:

- | SIGN SUPPORT | # OF POSTS | MAX. SIGN AREA |
|--------------|------------|----------------|
| 10 BWG       | 1          | 16 SF          |
| 10 BWG       | 2          | 32 SF          |
| Sch 80       | 1          | 32 SF          |
| Sch 80       | 2          | 64 SF          |
- The Engineer may require that a Schedule 80 post be used in place of a 10 BWG where a sign height is abnormally high due to a fill slope.
- Sign supports shall not be spliced except where shown. Sign support posts shall not be spliced.
- Aluminum sign blanks shall conform to Departmental Material Specifications DMS-7110 and shall have the following minimum thicknesses: 0.080 for signs less than 7.5 sq. ft., 0.100 for signs 7.5 to 15 sq. ft., and 0.125 for signs greater than 15 sq. ft.
- Signs that require specific supports due to reasons in addition to windloading are indicated on the "REQUIRED SUPPORT" table on this sheet.
- For horizontal rectangular signs fabricated from flat aluminum, T-brackets are used for signs 24 inches or less in height. U-brackets are used for signs of greater height.
- When two triangular slipbase supports are used to support a single sign, they shall not be "rigidly" connected to each other except through the sign panel. This will allow each support to act independently when impacted by an errant vehicle.
- Wing channel shall meet ASTM A 1011 SS Gr 50 and be galvanized per ASTM A 123.
- Excess pipe, wing channel, or windbeam shall be cut off so that it does not extend beyond the sign panel (i.e., excess support shall not be visible when the sign is viewed from the front.) Repair galvanized coating at cut support ends per Item 445, "Galvanizing."
- Sign blanks shall be the sizes and shapes shown on the plans.
- Additional sign clamp required on the "T-bracket" post for 24 inch high signs. Place the clamp 3 inches above bottom of sign when possible.
- Post open ends shall be fitted with Friction Caps.

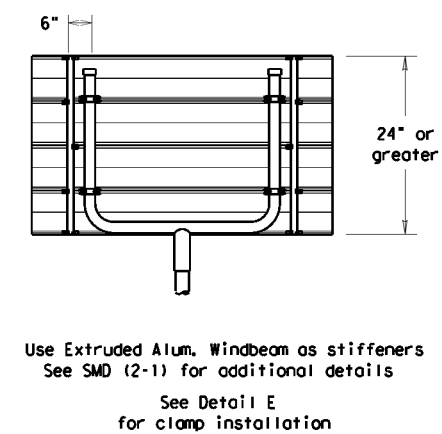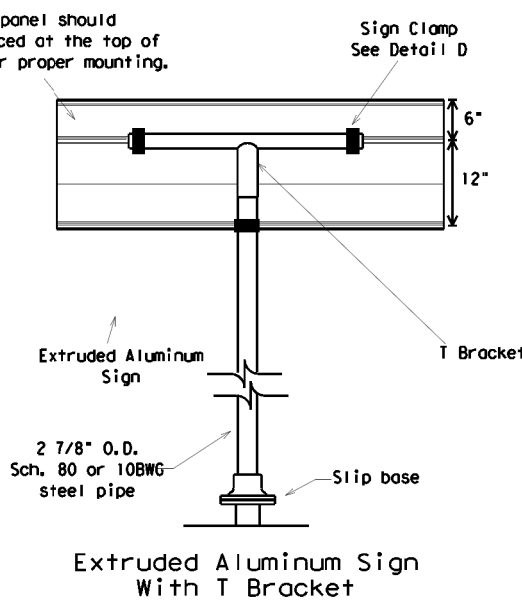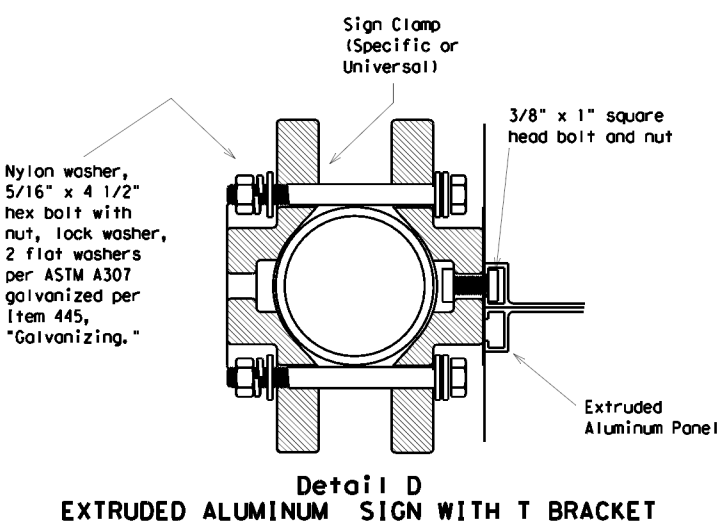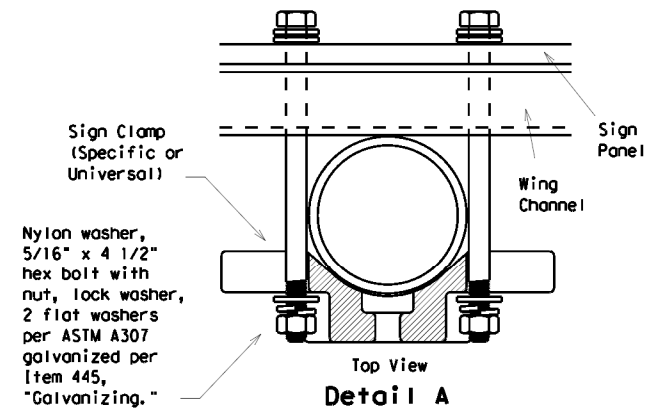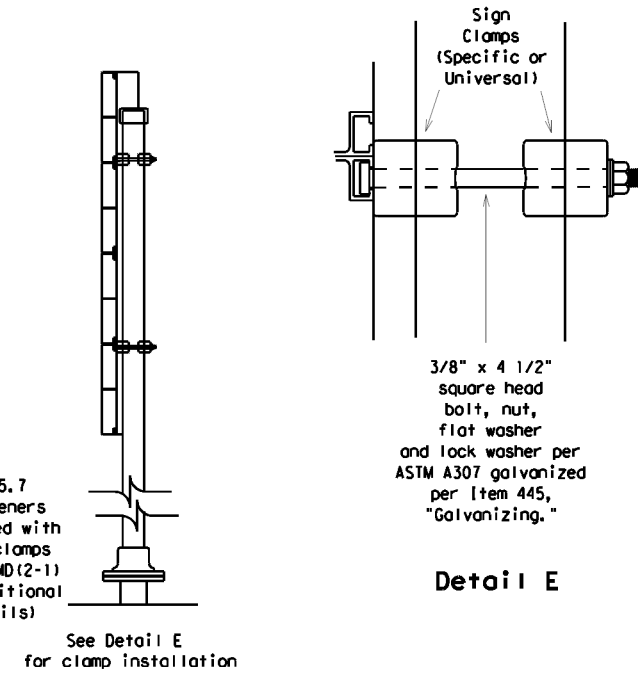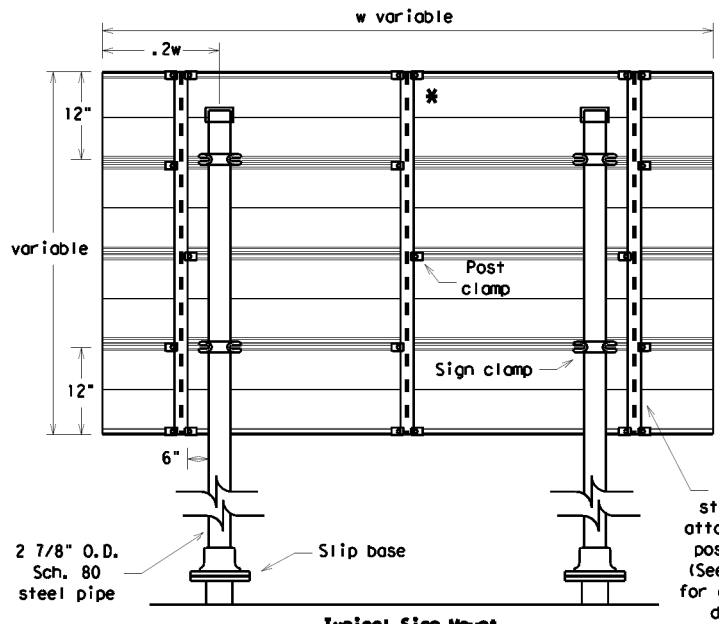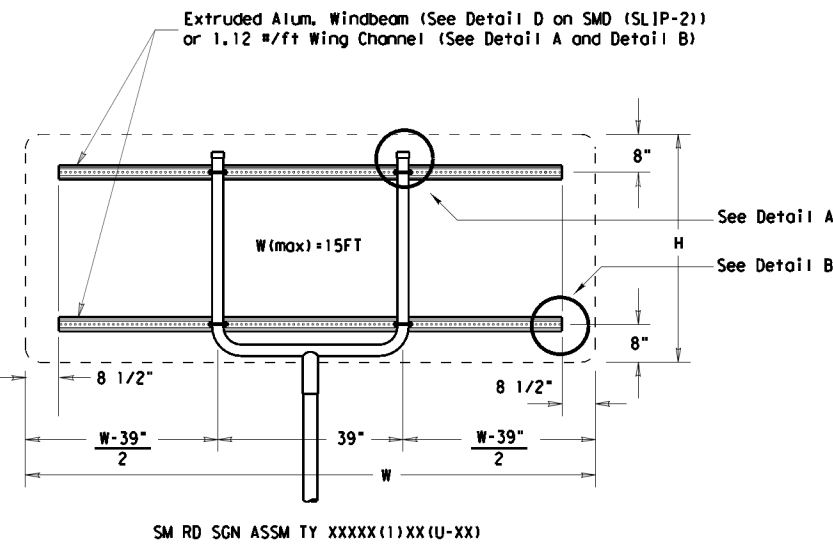

REQUIRED SUPPORT		
	SIGN DESCRIPTION	SUPPORT
Regulatory	48-inch STOP sign (R1-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	60-inch YIELD sign (R1-2)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	48x16-inch ONE-WAY sign (R6-1)	TY 10BWG(1)XX(T) TY 10BWG(1)XX(P-BM)
	36x48, 48x36, and 48x48-inch signs	TY 10BWG(1)XX(T)
Warning	48x60-inch signs	TY S80(1)XX(T)
	48x48-inch signs (diamond or square)	TY 10BWG(1)XX(T)
	48x60-inch signs	TY S80(1)XX(T)
	48-inch Advance School X-ing sign (S1-1)	TY 10BWG(1)XX(T)
	48-inch School X-ing sign (S2-1)	TY 10BWG(1)XX(T)
	Large Arrow sign (W1-6 & W1-7)	TY 10BWG(1)XX(T)

Texas Department of Transportation  
Traffic Operations Division

SIGN MOUNTING DETAILS  
SMALL ROADSIDE SIGNS  
TRIANGULAR SLIPBASE SYSTEM  
SMD(SLIP-3)-08

© TxDOT July 2002		DNR TxDOT	CR: TxDOT	DIR: TxDOT	CR: TxDOT
9-08	REVISIONS	CONT	SECT	JOB	HIGHWAY
		0156	12	020	SS 477
		DIST	COUNTY		SHEET NO.
		WFS	WICHITA		99

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

**I. WORK AT CROSSING LOCATIONS (AT GRADE, HIGHWAY OVERPASS, HIGHWAY UNDERPASS, PEDESTRIAN, OR CLOSED/ABANDONED)**

This project is adjacent or parallel work, not within RR ROW:  
 DOT No.: 275335A, Etc.  
 Crossing Type: AT-Grade  
 RR Company Operating Track at Crossing: BNSF  
 RR Company Owning Track at Crossing: BNSF  
 RR MP: 114.120, Etc.  
 RR Subdivision: Red River Valley  
 City: Wichita Falls  
 County: Wichita  
 CSJ at this Crossing: 0156-12-020

Scope of Work, including any TCP, to be performed by State Contractor:  
 Mill and inlay hot mix along SP 447. Traffic Control and paving operations will need to enter RR ROW.

Scope of Work to be performed by Railroad Company:  
 N/A

**II. FLAGGING & INSPECTION**

No. of Days of Railroad Flagging Expected: 10  
 On this project, night or weekend flagging is:  
 Expected  
 Not Expected  
 Flagging services will be provided by:  
 Railroad Company: TxDOT will pay flagging invoices. Flagging Agreement with Railroad will be needed  
 Outside Party: Contractor will pay flagging invoices to be reimbursed by TxDOT

Contractor must incorporate flaggers into anticipated construction schedule. The Railroad requires a 30-day notice if their flaggers are to be utilized. If Contractor falls behind schedule due to their own negligence and is not ready for scheduled flaggers, any flagging charges will be paid by Contractor.

Contact Information for Flagging:  
 **UPRR** UP.info@railpros.com  
 Call Center 877-315-0513, Select #1 for flagging  
 UP.request@nrssinc.net  
 Call Center 877-984-677  
 **BNSF** BNSFinfo@railprofs.com  
 Call Center 877-315-0513, Select #1 for flagging  
 **KCS** KCS.info@railpros.com  
 Call Center 877-315-0513, Select #1 for flagging  
 Bottom Line On-Track Safety Services  
 bottomline076@aol.com, 903-767-7630

OTHERS:

Contractor must incorporate Construction Inspection into anticipated construction schedule.

Not Required  
 Required. Contact Information for Construction Inspection:  
 \_\_\_\_\_

**III. CONSTRUCTION WORK TO BE PERFORMED BY THE RAILROAD**

Required. Railroad Point of Contact: \_\_\_\_\_  
 Not Required

Coordinate with TxDOT for any work to be performed by the Railroad Company. TxDOT must issue a work order for any work done by the Railroad Company prior to the work being performed.

**IV. RAILROAD INSURANCE REQUIREMENTS**

The Contractor shall confirm the insurance requirements with the Railroad as the insurance limits are subject to change without notice.

Insurance policies and corresponding certificates of insurance must be issued by the contractor on behalf of the Railroad. Separate insurance policies and certificates are required when more than one Railroad Company is operating on the same right of way, or when several Railroad Companies are involved and operate on their own separate right of ways.

No direct compensation will be made to the Contractor for providing the insurance coverages shown below or any deductibles. These costs are incidental to the various bid items.

Escalated Limits	
Type of Insurance	Amount of Coverage (Minimum)
Workers Compensation	\$500,000 / \$500,000 / \$500,000
Commercial General Liability	\$2,000,000 / \$4,000,000
Business Automobile	\$2,000,000

Railroad Protective Liability Limits	
<input type="checkbox"/> Not Required	
<input checked="" type="checkbox"/> Non - Bridge/Typical Maintenance Projects. Includes repairs to overpass/underpass and culvert structures	\$2,000,000 / \$6,000,000
<input type="checkbox"/> Bridge Structure Projects. Includes new construction or replacement of overpass/underpass structures	\$5,000,000 / \$10,000,000
<input type="checkbox"/> Other: _____	

**V. CONTRACTOR'S RIGHT OF ENTRY (CROE)**

Not Required  
 Required: UPRR Maintenance Consent Letter. TxDOT to assist  
 Required: TxDOT to assist in obtaining the UPRR CROE  
 Required: Contractor to obtain  
 BNSF: \_\_\_\_\_  
 https://bnsf.railpermitting.com  
 KCS  
 https://jllrpg.360works.com/fmi/webd/rpo\_web\_kcs.fmp12  
 Other Railroads: \_\_\_\_\_

To view previously approved CROE templates agreed upon between the State and Railroad, see: <https://www.txdot.gov/business/resources/railroad-highway-crossing/sample-right-of-entry-agreements.html>

Approved CROE templates are not to be modified by the Contractor.

Contractor shall not operate within Railroad Right of Way without an executed Construction & Maintenance Agreement between the State and the Railroad and an executed CROE between the Contractor and the Railroad if required on project.

**VI. RAILROAD COORDINATION MEETING**

A Railroad Coordination Meeting is required. See item 5, Article 8.1, of the Standard Specifications for Construction and Maintenance of Highways, Streets and Bridges Manual for more details.

**VII. RAILROAD SAFETY ORIENTATION**

A. Complete the Railroad's course "Orientation for Contractor's Safety," and maintain registration prior to working on the Railroad's property. This course is required to be completed annually by Contractor and Subcontractor personnel working on site.

UPRR, BNSF, KCS/TEXMEX will not accept on-track safety training certificates from other Railroads. Refer to each Railroad's specific contractor right of entry for training information.

Know and follow the Contractor's Right of Entry Agreement EXHIBIT D, MINIMUM SAFETY REQUIREMENTS regarding clothing, personal protective equipment, and general safety requirements.

**VIII. SUBCONTRACTORS**

Contractor shall not subcontract work without written consent of TxDOT. Subcontractors are subject to the same insurance requirements as the Prime Contractor.

**IX. EMERGENCY NOTIFICATION**

**In Case of Railroad Emergency**  
 Call: BNSF \_\_\_\_\_  
 Railroad Emergency Line at: (800) 832-5452 \_\_\_\_\_  
 Location: DOT 275335A, Etc. \_\_\_\_\_  
 RR Milepost: 114.210, Etc. \_\_\_\_\_  
 Subdivision: Red River Valley \_\_\_\_\_

**RRD Review Only**  
 Initials: Jll  
 Date: 8/3/2023

		<b>Rail Division</b>	
<b>RAILROAD SCOPE OF WORK</b> PROJECT SPECIFIC DETAILS			
FILE: rr-scope-of-work.pdf	DN: TxDOT	CK: _____	DW: _____
© TxDOT June 2014	CONT	SECT	JOB HIGHWAY
3/2023	0156	12	020 SP 447
	DIST	COUNTY	SHEET NO.
	03	Wichita	100

DOT #	CROSSING TYPE	RAILROAD OWNER	RAILROAD OPERATOR	RRMP	RR SUBDIVISION	CITY	COUNTY	CSJ AT THE CROSSING	HIGHWAY/ROADWAY NAME CROSSING THE RAILROAD
275335A	At Grade	BNSF Railway Company	BNSF Railway Company	114.21	Red River Valley	Wichita Falls	Wichita	0156-12-020	OAK ST
275336G	At Grade	BNSF Railway Company	BNSF Railway Company	113.59	Red River Valley	Wichita Falls	Wichita	0156-12-020	MISSISSIPPI AVE
276562J	At Grade	BNSF Railway Company	BNSF Railway Company	112.85	Red River Valley	Wichita Falls	Wichita	0156-12-020	BLUFF ST
276563R	At Grade	BNSF Railway Company	BNSF Railway Company	114.21	Red River Valley	Wichita Falls	Wichita	0156-12-020	AUSTIN ST
276564X	At Grade	BNSF Railway Company	BNSF Railway Company	113.17	Red River Valley	Wichita Falls	Wichita	0156-12-020	FORT WORTH ST
276565E	At Grade	BNSF Railway Company	BNSF Railway Company	0.74	Red River Valley	Wichita Falls	Wichita	0156-12-020	DALLAS ST
276566L	At Grade	BNSF Railway Company	BNSF Railway Company	0.74	Red River Valley	Wichita Falls	Wichita	0156-12-020	LAMAR ST
276567T	At Grade	BNSF Railway Company	BNSF Railway Company	0.74	Red River Valley	Wichita Falls	Wichita	0156-12-020	LAMAR STREET
276568A	At Grade	BNSF Railway Company	BNSF Railway Company	0.58	Red River Valley	Wichita Falls	Wichita	0156-12-020	BU 287
276570B	At Grade	BNSF Railway Company	BNSF Railway Company	0.43	Red River Valley	Wichita Falls	Wichita	0156-12-020	OAK ST
276571H	At Grade	BNSF Railway Company	BNSF Railway Company	114.21	Red River Valley	Wichita Falls	Wichita	0156-12-020	BARWISE ST (MP 0.19)
276638M	At Grade	BNSF Railway Company	BNSF Railway Company	0.54	Red River Valley	Wichita Falls	Wichita	0156-12-020	14TH STREET
276641V	At Grade	BNSF Railway Company	BNSF Railway Company	0.14	Red River Valley	Wichita Falls	Wichita	0156-12-020	15TH STREET
276642C	At Grade	BNSF Railway Company	BNSF Railway Company	113.8	Red River Valley	Wichita Falls	Wichita	0156-12-020	SIXTEENTH
675130L	RR Under	BNSF Railway Company	BNSF Railway Company	113.77	Red River Valley	Wichita Falls	Wichita	0156-12-020	STATE SPUR 447/KELL BLVD OVERPASS



**RAILROAD SCOPE OF WORK  
PROJECT SPECIFIC DETAILS**

**SHEET 2 OF 2**

FILE:	RR Scope of Work.dgn	DN: TxDOT	CK:	DW:	CK:
REVISIONS	CONT	SECT	JOB	HIGHWAY	
	0156	12	020	SP 447	
	DIST	COUNTY		SHEET NO.	
	03	WICHITA		101	





**STORMWATER POLLUTION PREVENTION PLAN (SWP3):**

This SWP3 has been developed in accordance with TxDOT policy for projects disturbing less than 1 acre of soil, and not part of a larger common plan of development.

For projects with less than one acre of soil disturbing activity and that have Environmental, Permits, Issues, and Commitments (EPICs) dependent on stormwater controls and water quality measures TxDOT will maintain a SWP3 with all pertinent records, correspondence, environmental documents, etc. at the project field office, Area Office, or electronically.

This SWP3 is consistent with requirements specified in applicable stormwater plans, and the project's environmental permits, issues, and commitments (EPICs).

**1.0 SITE/PROJECT DESCRIPTION**

**1.1 PROJECT CONTROL SECTION JOB (CSJ):**

0156-12-020

**1.2 PROJECT LIMITS:**

From: HOMES AVENUE

To: US 82

**1.3 PROJECT COORDINATES:**

BEGIN: (Lat) 33.9138233, (Long) -98.4805373

END: (Lat) 33.8967269, (Long) -98.4952178

**1.4 TOTAL PROJECT AREA (Acres):** 62.68

**1.5 TOTAL AREA TO BE DISTURBED (Acres):** 0.26

**1.6 NATURE OF CONSTRUCTION ACTIVITY:**

PAVEMENT REPAIR AND OVERLAY

**1.7 MAJOR SOIL TYPES:**

Soil Type	Description
MINCO VERY FINE SANDY LOAM	Eolian deposits derived from sedimentary rock
TELLER LOAM	Loamy alluvium derived from sedimentary rock
NEBGEN GRANDFIELD WESWIND ASSOCIATION	Loamy colluvium over clayey residuum weathered from sandstone and shale
NEBGEN KNOCO COMPLEX	Loamy residuum weathered from sandstone
PORT SOILS	Mixed loamy alluvium
WESWOOD SILT LOAM	Loamy alluvium
YOMONT VERY FINE SANDY LOAM	Calcareous loamy alluvium

**1.8 PROJECT SPECIFIC LOCATIONS (PSLs):**

PSLs must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. PSLs may be identified during preconstruction meetings or during the construction process. Please choose from the options below:

- PSLs determined during preconstruction meeting
- PSLs determined during construction
- No PSLs planned for construction

Type	Sheet #s

All off-ROW PSLs required by the Contractor are the Contractor's responsibility. The Contractor shall secure all permits required by local, state, federal laws for off-ROW PSLs. The contractor shall provide diagrams, areas of disturbance, acreage, and BMPs for all off-ROW PSLs within one mile of the project.

**1.9 CONSTRUCTION ACTIVITIES:**

(Use the following list as a starting point when developing the Construction Activity Schedule and Ceasing Record in Attachment 2.3.)

- Mobilization
- Install sediment and erosion controls
  - Blade existing topsoil into windrows, prep ROW, clear and grub
  - Remove existing pavement
  - Grading operations, excavation, and embankment
  - Excavate and prepare subgrade for proposed pavement widening
  - Remove existing culverts, safety end treatments (SETs)
- Remove existing metal beam guard fence (MBGF), bridge rail
  - Install proposed pavement per plans
  - Install culverts, culvert extensions, SETs
- Install mow strip, MBGF, bridge rail
  - Place flex base
  - Rework slopes, grade ditches
  - Blade windrowed material back across slopes
- Revegetation of unpaved areas
- Achieve site stabilization and remove sediment and erosion control measures

Other: \_\_\_\_\_  
 Other: \_\_\_\_\_  
 Other: \_\_\_\_\_

**1.10 POTENTIAL POLLUTANTS AND SOURCES:**

- Sediment laden stormwater from stormwater conveyance over disturbed area
- Fuels, oils, and lubricants from construction vehicles, equipment, and storage
- Solvents, paints, adhesives, etc. from various construction activities
- Transported soils from offsite vehicle tracking
- Construction debris and waste from various construction activities
- Contaminated water from excavation or dewatering pump-out water
- Sanitary waste from onsite restroom facilities
- Trash from various construction activities/receptacles
- Long-term stockpiles of material and waste
- Discharges from concrete washout activities, runoff from concrete cutting activities, and other concrete related activities
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**1.11 RECEIVING WATERS:**

Receiving waters must be depicted on the Environmental Layout Sheets in Attachment 1.2 of this SWP3. Include Segment # for receiving waters.

Tributaries	Classified Waterbody
CITY OF WICHITA FALLS SANITARY SEWER SYSTEM	

\* Add (\*) for impaired waterbodies with pollutant in ( ).

**1.12 ROLES AND RESPONSIBILITIES: TxDOT**

- Development of plans and specifications
- Perform SWP3 inspections
- Maintain SWP3 records and update to reflect daily operations
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**1.13 ROLES AND RESPONSIBILITIES: CONTRACTOR**

- Day To Day Operational Control
- Maintain schedule of major construction activities
- Install, maintain and modify BMPs
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**STORMWATER POLLUTION PREVENTION PLAN (SWP3) (Less Than 1 Acre)**

FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
06	F 2024 (665)			104
STATE	STATE DIST.	COUNTY		
TEXAS	WFS	WICHITA		
CONT.	SECT.	JOB	HIGHWAY NO.	
0156	12	020	SS 447	



**STORMWATER POLLUTION PREVENTION PLAN (SWP3):**

**2.0 BEST MANAGEMENT PRACTICES (BMPs) AND CONTROLS, INSPECTION, AND MAINTENANCE**

The Contractor shall be the responsible party for implementing the BMPs described herein and for complying with the SWP3 for control of erosion and sedimentation during day-to-day operations. The Contractor shall implement changes to this SWP3 approved by TxDOT within the times specified in this SWP3 or the CGP.

**2.1 EROSION CONTROL AND SOIL STABILIZATION BMPs:**

**T / P**

- Protection of Existing Vegetation
- Vegetated Buffer Zones
- Soil Retention Blankets
- Geotextiles
- Mulching/ Hydromulching
- Soil Surface Treatments
- Temporary Seeding
- Permanent Planting, Sodding or Seeding
- Biodegradable Erosion Control Logs
- Rock Filter Dams/ Rock Check Dams
- Vertical Tracking
- Interceptor Swale
- Riprap
- Diversion Dike
- Temporary Pipe Slope Drain
- Embankment for Erosion Control
- Paved Flumes
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**2.2 SEDIMENT CONTROL BMPs:**

**T / P**

- Biodegradable Erosion Control Logs
- Dewatering Controls
- Inlet Protection
- Rock Filter Dams/ Rock Check Dams
- Sandbag Berms
- Sediment Control Fence
- Stabilized Construction Exit
- Floating Turbidity Barrier
- Vegetated Buffer Zones
- Vegetated Filter Strips
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

**2.3 PERMANENT CONTROLS:**

(Coordinate post-construction BMPs with appropriate TxDOT maintenance sections.)

BMPs To Be Left In Place Post Construction:

Type	Stationing	
	From	To

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

**2.4 OFFSITE VEHICLE TRACKING CONTROLS:**

- Excess dirt/mud on road removed daily
- Haul roads dampened for dust control
- Loaded haul trucks to be covered with tarpaulin
- Stabilized construction exit
- Daily street sweeping
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**2.5 POLLUTION PREVENTION MEASURES:**

- Chemical Management
- Concrete and Materials Waste Management
- Debris and Trash Management
- Dust Control
- Sanitary Facilities
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**2.6 VEGETATED BUFFER ZONES:**

Natural vegetated buffers shall be maintained as feasible to protect adjacent surface waters. If vegetated natural buffer zones are not feasible due to site geometry, the appropriate additional sediment control measures have been incorporated into this SWP3.

Type	Stationing	
	From	To

Refer to the Environmental Layout Sheets/ SWP3 Layout Sheets located in Attachment 1.2 of this SWP3

**2.7 ALLOWABLE NON-STORMWATER DISCHARGES:**

- Fire hydrant flushings
- Irrigation drainage
- Pavement washwater (where spills or leaks have not occurred, and detergents are not used)
- Potable water sources
- Springs
- Uncontaminated groundwater
- Water used to wash vehicles or control dust
- Other allowable non-stormwater discharges as allowed by TPDES GP TXR150000.

**2.8 DEWATERING:**

Dewatering discharges of accumulated stormwater, groundwater, and surface water including discharges from dewatering of trenches, excavations, foundations, vaults, and other points of accumulation are prohibited unless managed by appropriate controls to prevent and minimize the offsite discharge of sediment and other pollutants.

**2.9 INSPECTIONS:**

All disturbed areas and erosion and sediment control devices shall be inspected at least once every seven (7) days. Inspections shall be performed by TxDOT as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SWP3 .

**2.10 MAINTENANCE:**

Control measures shall be properly installed according to specifications. If it is determined that a BMP or control measure is not operating effectively, maintenance must be accomplished as soon as possible and before the next anticipated rain event, but in no case later than 7 calendar days after being able to access the site. Maintenance shall be performed by the Contractor as indicated on the Field Inspection and Maintenance Report Form 2118 and retained in Attachment 2.3 of this SWP3.

**STORMWATER POLLUTION PREVENTION PLAN (SWP3) (Less Than 1 Acre)**

FED. RD. DIV. NO.	PROJECT NO.			SHEET NO.
06	F 2024 (665)			105
STATE	STATE DIST.	COUNTY		
TEXAS	WFS	WICHITA		
CONT.	SECT.	JOB	HIGHWAY NO.	
0156	12	020	SS 447	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect formats or damages resulting from its use.  
 DATE: 11/1/2023 7:16:57 AM  
 FILE: D:\t\tdot\projectwiseonline.com\TXDOT12\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\9 - Environmental\ENVIRONMENTAL PERMITS, ISSUES, AND COMMITMENTS.dgn

**I. STORMWATER POLLUTION PREVENTION-CLEAN WATER ACT SECTION 402**

TPDES TXR 150000: Stormwater Discharge Permit or Construction General Permit required for projects with 1 or more acres disturbed soil. Projects with any disturbed soil must protect for erosion and sedimentation in accordance with Item 506.

List MS4 Operator(s) that may receive discharges from this project. They may need to be notified prior to construction activities.

1. None  
 No Action Required  Required Action

Action No.  
 1. The project disturbs less than one acre of surface area. The contractor is responsible for the PSL as defined in the Standard Specifications for Construction and Maintenance of Highways, Streets, and Bridges. The total disturbed acreage is the combined acreage to be disturbed on the project and the contractor's PSL.  
 2. Prevent stormwater pollution by controlling erosion and sedimentation to the maximum extent practical. Comply with the SW3P and revise as necessary or as required by the Engineer.  
 3. This EPIC must be updated if the disturbed area increases to one or more acres during the course of construction.  
 4. It may become necessary to post a site notice and/or NOI for the project and/or PSL in a location accessible to the public and TCEQ, EPA, or other inspector if the disturbed area increases to more than 1 acre.

**II. WORK IN OR NEAR STREAMS, WATERBODIES AND WETLANDS CLEAN WATER ACT SECTIONS 401 AND 404**

USACE Permit required for filling, dredging, excavating or other work in any water bodies, rivers, creeks, streams, wetlands or wet areas.

The Contractor must adhere to all of the terms and conditions associated with the following permit(s):

- No Permit Required  
 Nationwide Permit 14 - PCN not Required (less than 1/10th acre waters or wetlands affected)  
 Nationwide Permit 14 - PCN Required (1/10 to <1/2 acre, 1/3 in tidal waters)  
 Individual 404 Permit Required  
 Other Nationwide Permit Required: NWP# \_\_\_\_\_

Required Actions: List waters of the US permit applies to, location in project and check Best Management Practices planned to control erosion, sedimentation and post-project TSS.

N/A

**III. CULTURAL RESOURCES**

Refer to TxDOT Standard Specifications in the event historical issues or archeological artifacts are found during construction. Upon discovery of archeological artifacts (bones, burnt rock, flint, pottery, etc.) cease work in the immediate area and contact the Engineer immediately.

- No Action Required  Required Action

1. There are two historical features within the limits of this project. One historical feature is a proposed historic district located on 13th Street (S1) between Scott Avenue and Mill St. Another historic feature is the Attebury Grain Elevator located on the South side of Kell Boulevard between Bluff St and Burnett St. Contractor will not stage equipment or disturb the integrity of either historical feature.

**IV. VEGETATION RESOURCES**

Preserve native vegetation to the extent practical. Contractor must adhere to Construction Specification Requirements Specs 162, 164, 192, 193, 506, 730, 751, 752 in order to comply with requirements for invasive species, beneficial landscaping, and tree/brush removal commitments.

- No Action Required  Required Action

Action No.  
 1. Impacts to vegetation should be kept to the minimum necessary. Associated impacts will be the minimum necessary to shoulder up roadway edge and replace guardrail.  
 2. Trees shall be trimmed rather than removed when feasible.  
 3. Disturbed areas would be re-vegetated according to txdot's standard practices for rural areas, which to the extent practicable, is in compliance with Executive Memorandum on Beneficial Landscaping, if applicable.

**V. FEDERAL LISTED, PROPOSED THREATENED, ENDANGERED SPECIES, CRITICAL HABITAT, STATE LISTED SPECIES, CANDIDATE SPECIES AND MIGRATORY BIRDS.**

- No Action Required  Required Action

Action No.  
 1. Migratory Bird Treaty Act: Migratory birds may arrive in the project area to breed during construction of the proposed project. Measures would be taken to avoid the take of migratory birds, their occupied nests, eggs, or young, in accordance with the Migratory Bird Treaty Act, through phasing of work or preventative measures. Between October 1 and February 15, the contractor would remove all old migratory bird nests from any structures that would be affected by the proposed project, and complete any bridge work/demolition and/or vegetation clearing. In addition, the contractor would be prepared to prevent migratory birds from building nests by utilizing nest prevention methods, such as bird-deterrent netting and bird-repelling sprays and/or gels, between February 15 and October 1. In the event that migratory birds are encountered on-site during project construction, adverse impacts on protected birds, active nests, eggs, and/or young would be avoided.

**LIST OF ABBREVIATIONS**

BMP: Best Management Practice	SPCC: Spill Prevention Control and Countermeasure
CGP: Construction General Permit	SW3P: Storm Water Pollution Prevention Plan
DSHS: Texas Department of State Health Services	PCN: Pre-Construction Notification
FHWA: Federal Highway Administration	PSL: Project Specific Location
MOA: Memorandum of Agreement	TCEQ: Texas Commission on Environmental Quality
MOU: Memorandum of Understanding	TPDES: Texas Pollutant Discharge Elimination System
MS4: Municipal Separate Stormwater Sewer System	TPWD: Texas Parks and Wildlife Department
MBTA: Migratory Bird Treaty Act	TxDOT: Texas Department of Transportation
NOT: Notice of Termination	T&E: Threatened and Endangered Species
NWP: Nationwide Permit	USACE: U.S. Army Corps of Engineers
NOI: Notice of Intent	USFWS: U.S. Fish and Wildlife Service

**VI. HAZARDOUS MATERIALS OR CONTAMINATION ISSUES**

General (applies to all projects):  
 Comply with the Hazard Communication Act (the Act) for personnel who will be working with hazardous materials by conducting safety meetings prior to beginning construction and making workers aware of potential hazards in the workplace. Ensure that all workers are provided with personal protective equipment appropriate for any hazardous materials used.

Obtain and keep on-site Material Safety Data Sheets (MSDS) for all hazardous products used on the project, which may include, but are not limited to the following categories: Paints, acids, solvents, asphalt products, chemical additives, fuels and concrete curing compounds or additives. Provide protected storage, off bare ground and covered, for products which may be hazardous. Maintain product labeling as required by the Act.  
 Maintain an adequate supply of on-site spill response materials, as indicated in the MSDS. In the event of a spill, take actions to mitigate the spill as indicated in the MSDS, in accordance with safe work practices, and contact the District Spill Coordinator immediately. The Contractor shall be responsible for the proper containment and cleanup of all product spills.

- Contact the Engineer if any of the following are detected:  
 \* Dead or distressed vegetation (not identified as normal)  
 \* Trash piles, drums, canister, barrels, etc.  
 \* Undesirable smells or odors  
 \* Evidence of leaching or seepage of substances

Does the project involve any bridge class structure rehabilitation or replacements (bridge class structures not including box culverts)?

- Yes  No

If "No", then no further action is required. If "Yes", then TxDOT is responsible for completing asbestos assessment/inspection.

Are the results of the asbestos inspection positive (is asbestos present)?

- Yes  No

If "Yes", then TxDOT must retain a DSHS licensed asbestos consultant to assist with the notification, develop abatement/mitigation procedures, and perform management activities as necessary. The notification form to DSHS must be postmarked at least 15 working days prior to scheduled demolition.

If "No", then TxDOT is still required to notify DSHS 15 working days prior to any scheduled demolition.

In either case, the Contractor is responsible for providing the date(s) for abatement activities and/or demolition with careful coordination between the Engineer and asbestos consultant in order to minimize construction delays and subsequent claims.

Any other evidence indicating possible hazardous materials or contamination discovered on site. Hazardous Materials or Contamination Issues Specific to this Project:

- No Action Required  Required Action

**VII. OTHER ENVIRONMENTAL ISSUES**


(includes regional issues such as Edwards Aquifer District, etc.)

- No Action Required  Required Action

Action No.  
 1. Keep noise to a minimum. Reduce idling of vehicles and equipment.  
 2. Maintain project site. Minimize dust and airborne particles to the maximum extent practical.  
 3. Collect all waste materials, trash and debris from the construction site daily and deposit into a metal dumpster having a secure cover.  
 4. Collect sanitary waste in accordance with local regulations by a sanitary waste collector. Portable units shall not be placed in or near a waterway or drainage area.  
 5. TxDOT EMS Policy Statement (English & Spanish) shall be displayed at the construction site.

		Design Division Standard	
<b>ENVIRONMENTAL PERMITS, ISSUES AND COMMITMENTS</b>			
<b>EPIC</b>			
FILE: epic.dgn	DNR TxDOT	CR: RG	DNR VP
©TxDOT: February 2015	CONT	SECT	HIGHWAY
12-12-2011 (DS) REVISIONS	0156	12	020
05-07-14 ADDED NOTE SECTION IV.	DIST	COUNTY	SHEET NO.
01-23-2015 SECTION I (CHANGED ITEM 1122 TO ITEM 506, ADDED GRASSY SWALES.	WFS		106

DATE: 11/1/2023 8:10:45 AM  
 FILE: pw://twdot.projectwiseonline.com:TXDOT12/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/9. Environmental/TYPICAL SW3P LAYOUT.dgn

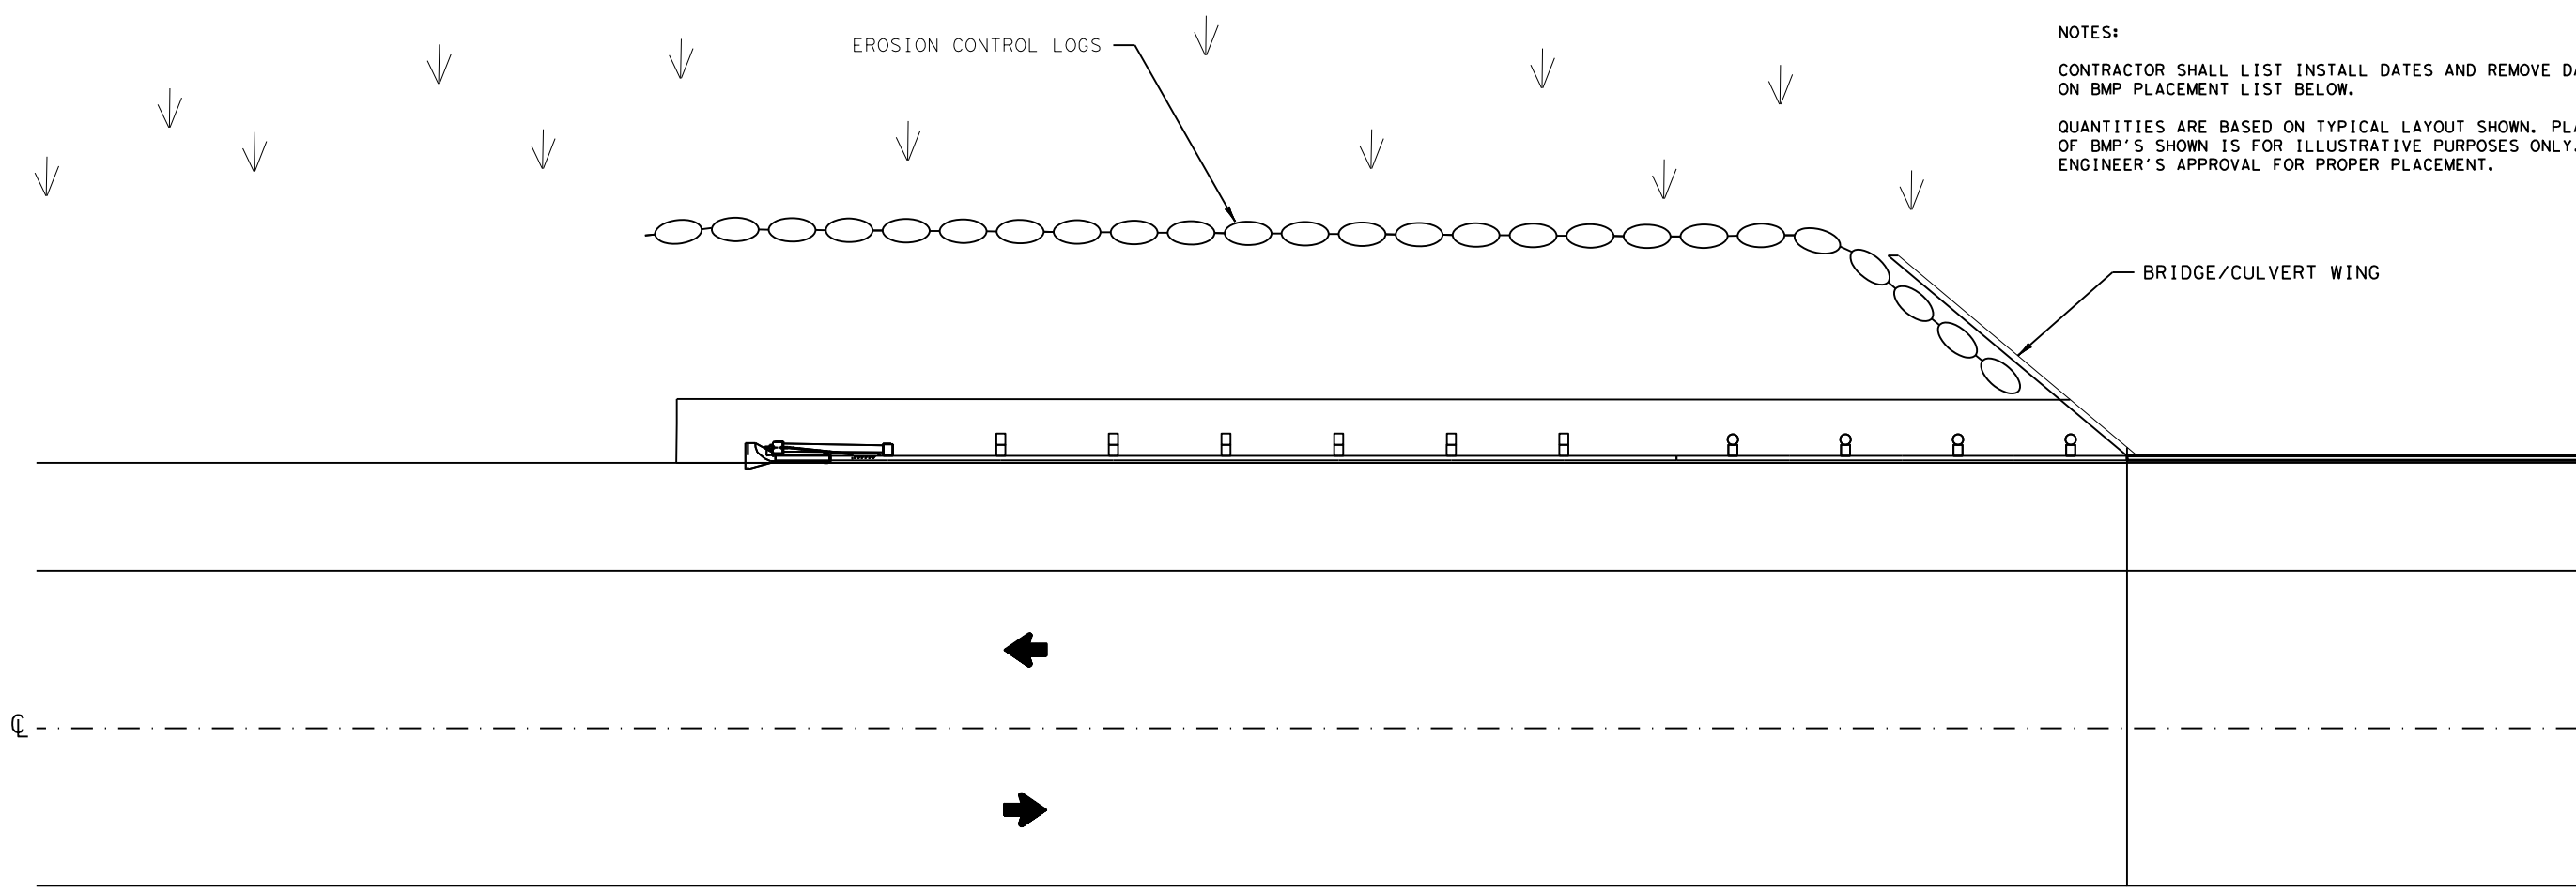


NOTES:  
 CONTRACTOR SHALL LIST INSTALL DATES AND REMOVE DATES ON BMP PLACEMENT LIST BELOW.  
 QUANTITIES ARE BASED ON TYPICAL LAYOUT SHOWN. PLACEMENT OF BMP'S SHOWN IS FOR ILLUSTRATIVE PURPOSES ONLY. SEEK ENGINEER'S APPROVAL FOR PROPER PLACEMENT.

## TYPICAL BMP LAYOUT

REFERENCE NO.	BMP PLACEMENT - UPSTREAM END					
	DATE INSTALLED	DATE DISTURBED	DATE MAINTAINED	DATE REPLACED	DATE STABILIZED	DATE REMOVED
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

REFERENCE NO.	BMP PLACEMENT - DOWNSTREAM END					
	DATE INSTALLED	DATE DISTURBED	DATE MAINTAINED	DATE REPLACED	DATE STABILIZED	DATE REMOVED
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						


NOT TO SCALE



*Bryson Lawrence, P.E.*

03/26/2024


**SS 447**  
 TYPICAL SW3P  
 LAYOUT




CONT	SECT	JOB	HIGHWAY
0156	12	020	SS 447
DIST	COUNTY	SHEET NO.	
WFS	WICHITA	107	

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 11/1/2023  
 FILE: D:\w\txdot\projectwiseonline.com\TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\9. Environmental\EC(9) - 16.dgn

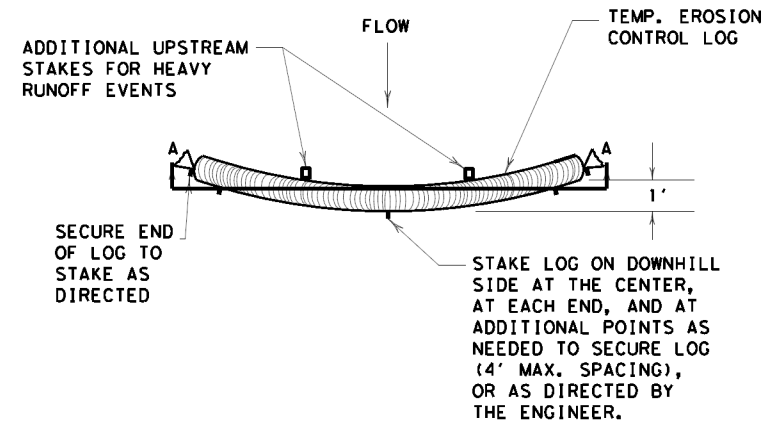


PLAN VIEW

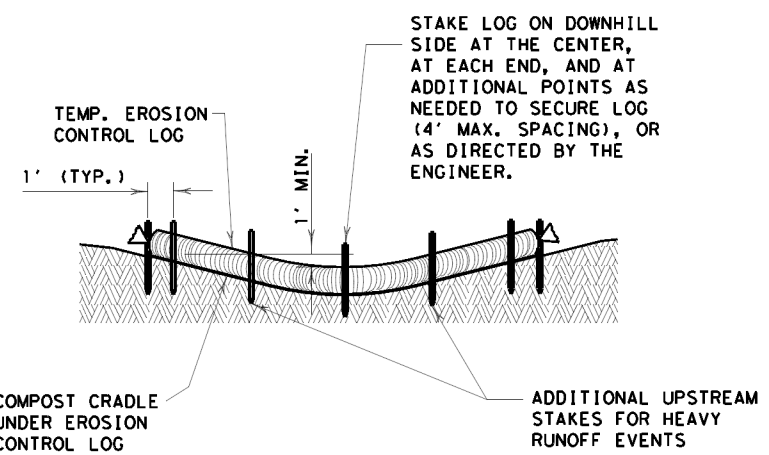


SECTION A-A  
EROSION CONTROL LOG DAM

CL-D

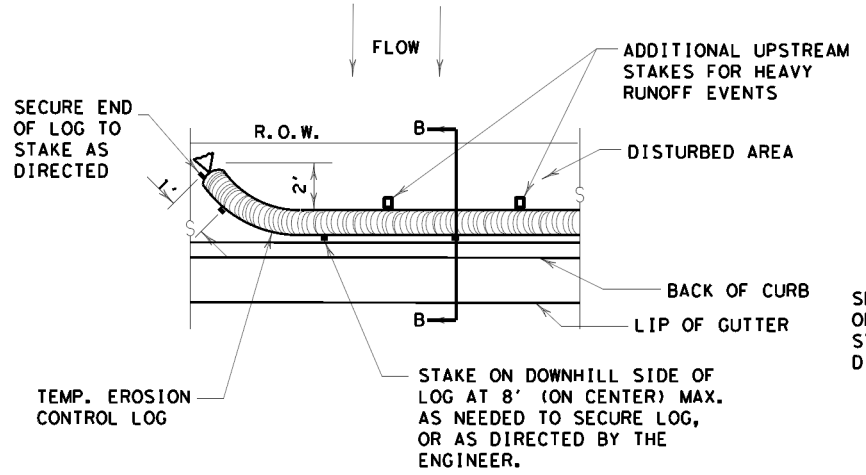


PLAN VIEW

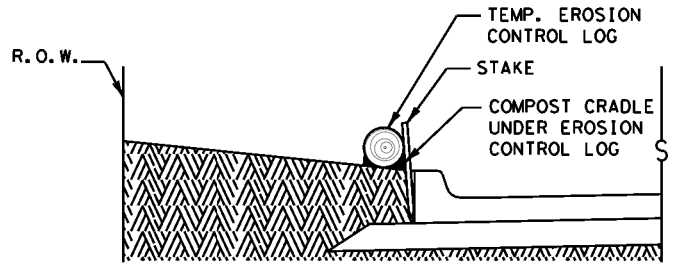


SECTION B-B

EROSION CONTROL LOG AT BACK OF CURB

CL-BOC

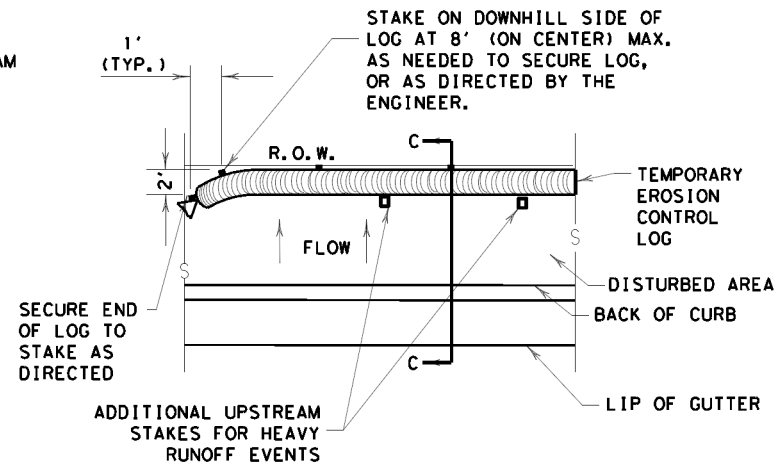


PLAN VIEW

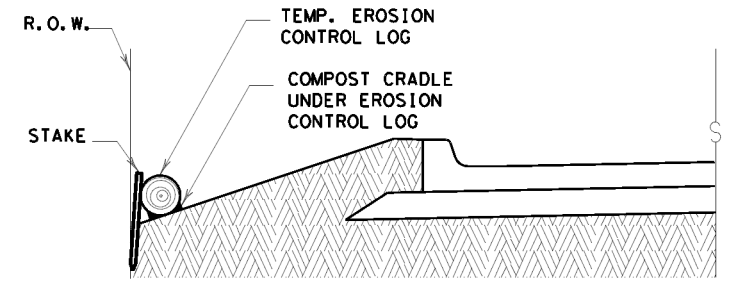

SECTION C-C


EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY

CL-ROW

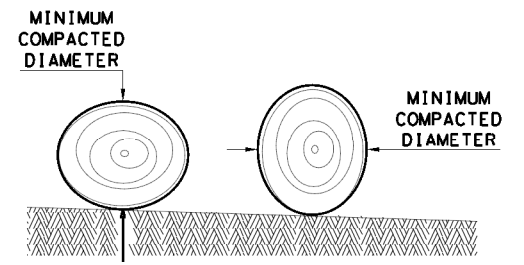

DIAMETER MEASUREMENTS OF EROSION CONTROL LOGS SPECIFIED IN PLANS

- LEGEND**
- CL-D EROSION CONTROL LOG DAM
  - CL-BOC EROSION CONTROL LOG AT BACK OF CURB
  - CL-ROW EROSION CONTROL LOG AT EDGE OF RIGHT-OF-WAY
  - CL-SST EROSION CONTROL LOGS ON SLOPES STAKE AND TRENCHING ANCHORING
  - CL-SSL EROSION CONTROL LOGS ON SLOPES STAKE AND LASHING ANCHORING
  - CL-DI EROSION CONTROL LOG AT DROP INLET
  - CL-CI EROSION CONTROL LOG AT CURB INLET
  - CL-GI EROSION CONTROL LOG AT CURB & GRATE INLET



REBAR STAKE DETAIL

**SEDIMENT BASIN & TRAP USAGE GUIDELINES**

An erosion control log sediment trap may be used to filter sediment out of runoff draining from an unstabilized area.

**Log Traps:** The drainage area for a sediment trap should not exceed 5 acres. The trap capacity should be 1800 CF/Acre (0.5" over the drainage area).

Control logs should be placed in the following locations:

1. Within drainage ditches spaced as needed or min. 500' on center
2. Immediately preceding ditch inlets or drain inlets
3. Just before the drainage enters a water course
4. Just before the drainage leaves the right of way
5. Just before the drainage leaves the construction limits where drainage flows away from the project.

The logs should be cleaned when the sediment has accumulated to a depth of 1/2 the log diameter.

Cleaning and removal of accumulated sediment deposits is incidental and will not be paid for separately.

**GENERAL NOTES:**


1. EROSION CONTROL LOGS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS DIRECTED BY THE ENGINEER.
2. LENGTHS OF EROSION CONTROL LOGS SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS AND AS REQUIRED FOR THE PURPOSE INTENDED.
3. UNLESS OTHERWISE DIRECTED, USE BIODEGRADABLE OR PHOTODEGRADABLE CONTAINMENT MESH ONLY WHERE LOG WILL REMAIN IN PLACE AS PART OF A VEGETATIVE SYSTEM. FOR TEMPORARY INSTALLATIONS, USE RECYCLABLE CONTAINMENT MESH.
4. FILL LOGS WITH SUFFICIENT FILTER MATERIAL TO ACHIEVE THE MINIMUM COMPACTED DIAMETER SPECIFIED IN THE PLANS WITHOUT EXCESSIVE DEFORMATION.
5. STAKES SHALL BE 2" X 2" WOOD OR #3 REBAR, 2'-4' LONG, EMBEDDED SUCH THAT 2" PROTRUDES ABOVE LOG, OR AS DIRECTED BY THE ENGINEER.
6. DO NOT PLACE STAKES THROUGH CONTAINMENT MESH.
7. COMPOST CRADLE MATERIAL IS INCIDENTAL & WILL NOT BE PAID FOR SEPARATELY.
8. SANDBAGS USED AS ANCHORS SHALL BE PLACED ON TOP OF LOGS & SHALL BE OF SUFFICIENT SIZE TO HOLD LOGS IN PLACE.
9. TURN THE ENDS OF EACH ROW OF LOGS UPSLOPE TO PREVENT RUNOFF FROM FLOWING AROUND THE LOG.
10. FOR HEAVY RUNOFF EVENTS, ADDITIONAL UPSTREAM STAKES MAY BE NECESSARY TO KEEP LOG FROM FOLDING IN ON ITSELF.

SHEET 1 OF 3

		Design Division Standard	
<b>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES</b> <b>EROSION CONTROL LOG</b> <b>EC (9) - 16</b>			
FILE: ec916	DNR TxDOT	CK: KM	DWR: LS/PT
© TxDOT: JULY 2016	CONT SECT	JOB	HIGHWAY
REVISIONS	015612	020	SS 447
	DIST	COUNTY	SHEET NO.
	WFS	WICHITA	108


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE: 11/1/2023  
 FILE: D:\w\projectwiseonline.com\TXDOT2\Documents\03 - WFS\Design Projects\015612020\4 - Design\Plan Set\9. Environmental\EC(9) - 16.dgn

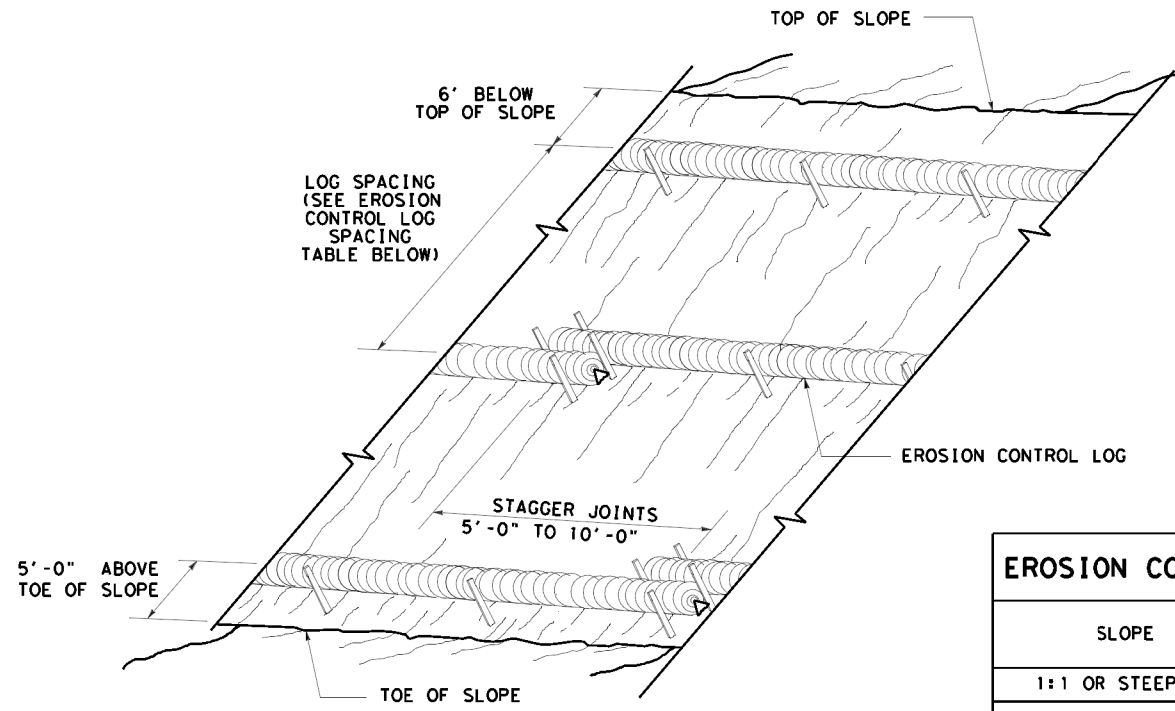

**EROSION CONTROL LOGS ON SLOPES  
 STAKE AND TRENCHING ANCHORING**


CL-SST

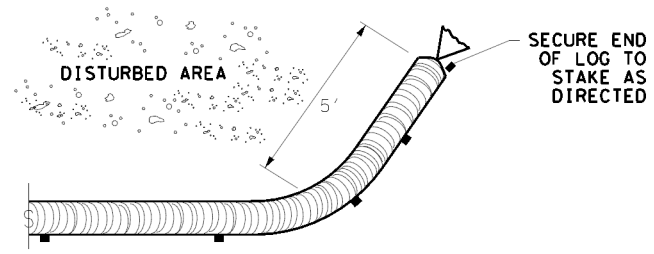

**END SECTION RAP DETAIL**


EROSION CONTROL LOG SPACING TABLE				
SLOPE	LOG DIAMETER			
	6"	8"	12"	18"
1:1 OR STEEPER	5'	10'	15'	20'
2:1	10'	20'	30'	40'
3:1	15'	30'	45'	60'
4:1 OR FLATTER	20'	40'	60'	80'

\* ADJUSTMENTS CAN BE MADE FOR SOIL TYPE:  
 SOFT, LOAMY SOILS-ADJUST ROWS CLOSER TOGETHER;  
 HARD, ROCKY SOILS- ADJUST ROWS FARTHER APART

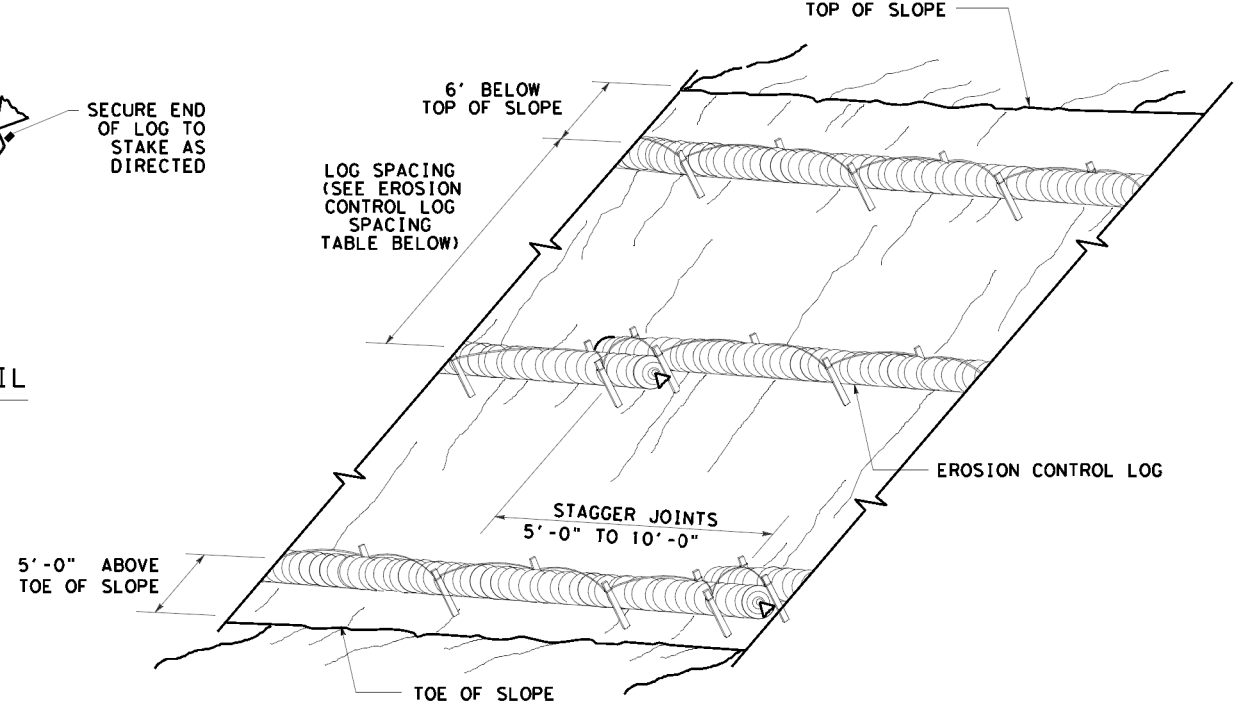



**EROSION CONTROL LOGS ON SLOPES  
 STAKE AND LASHING ANCHORING**

CL-SSL

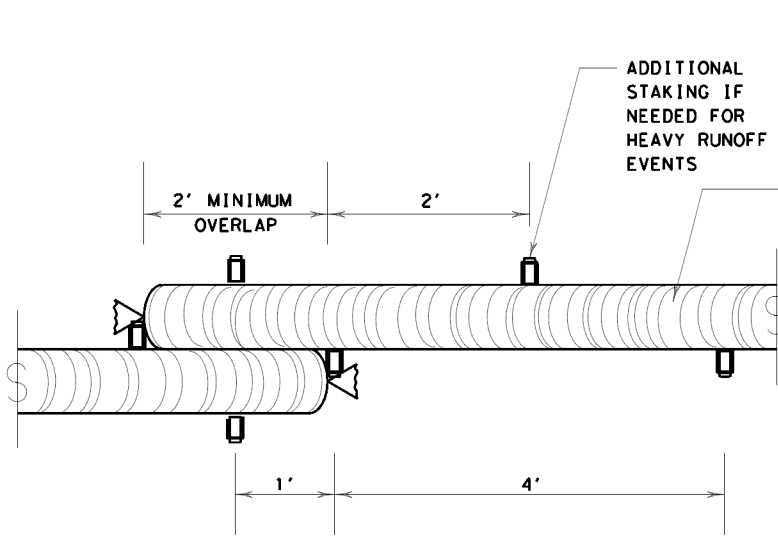


**STAKE AND TRENCHING ANCHORING DETAIL**

CL-SST

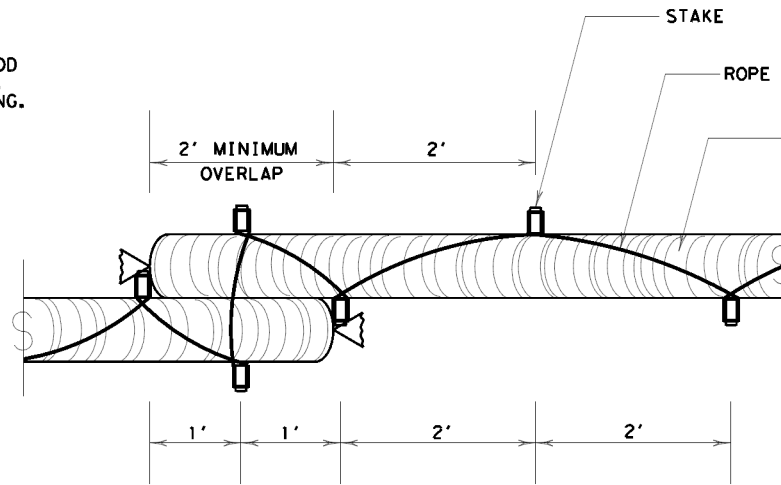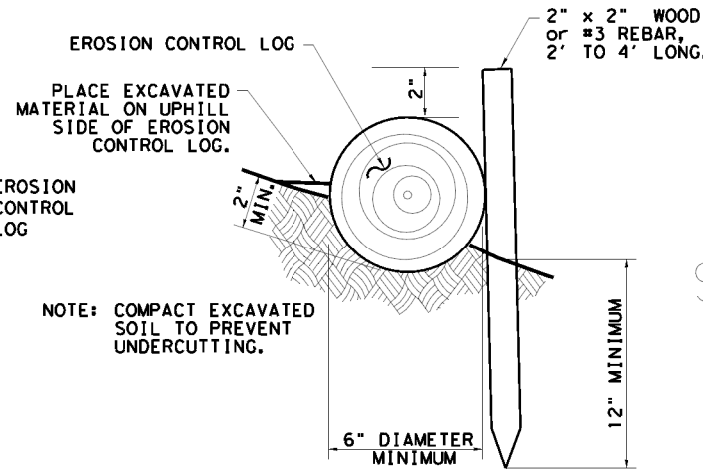


**STAKE AND LASHING ANCHORING DETAIL**

CL-SSL

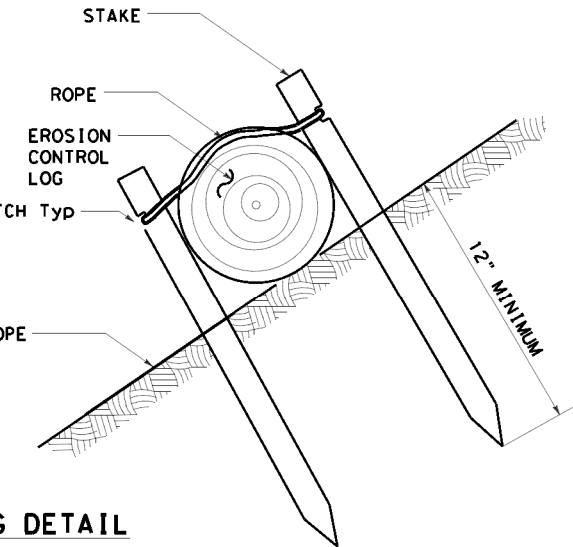

SHEET 2 OF 3


TRENCH DEPTH TABLE	
LOG DIAMETER	DEPTH
6"	2"
8"	3"
12"	4"
18"	5"



**STAKE NOTCH DETAIL**


		Design Division Standard	
<b>TEMPORARY EROSION,          SEDIMENT AND WATER          POLLUTION CONTROL MEASURES          EROSION CONTROL LOG          EC(9) - 16</b>			
FILE: ec116	DNR:TXDOT	CR: KM	DWR: LS/PT
© TXDOT: JULY 2016	CONT: 0156 12	SECT: 020	CR: SS 447
REVISIONS	DIST: WFS	COUNTY: WICHITA	SHEET NO.: 109

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.  
 DATE: 11/27/2023  
 FILE: pw://txdot.projectwiseonline.com:txdot2/Documents/03 - WFS/Design Projects/015612020/4 - Design/Plan Set/9. Environmental/EC(9) - 16.dgn

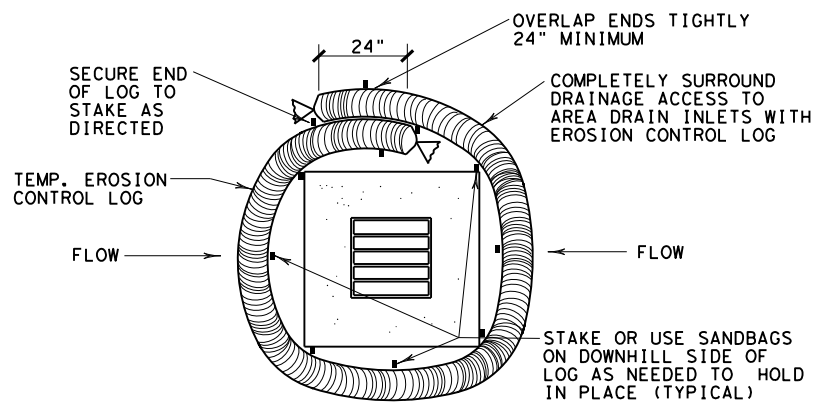


**EROSION CONTROL LOG AT DROP INLET**

CL-DI

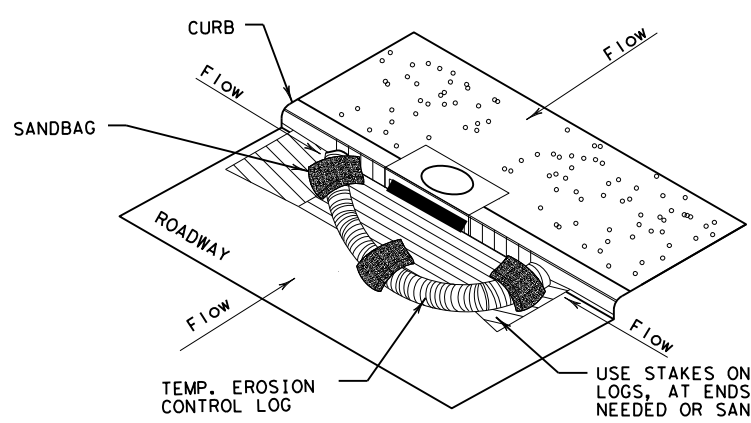

**EROSION CONTROL LOG AT CURB INLET**


CL-CI

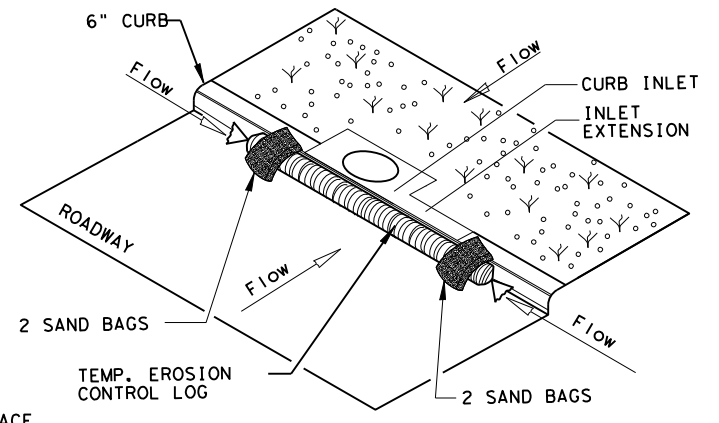

**EROSION CONTROL LOG AT CURB INLET**


CL-CI

NOTE:  
 EROSION CONTROL LOGS USED AT CURB INLETS SHOULD ONLY BE USED IF THEY WILL NOT IMPEDE TRAFFIC OR FLOOD THE ROADWAY OR WHEN THE STORM SEWER SYSTEM IS NOT FULLY FUNCTIONAL.

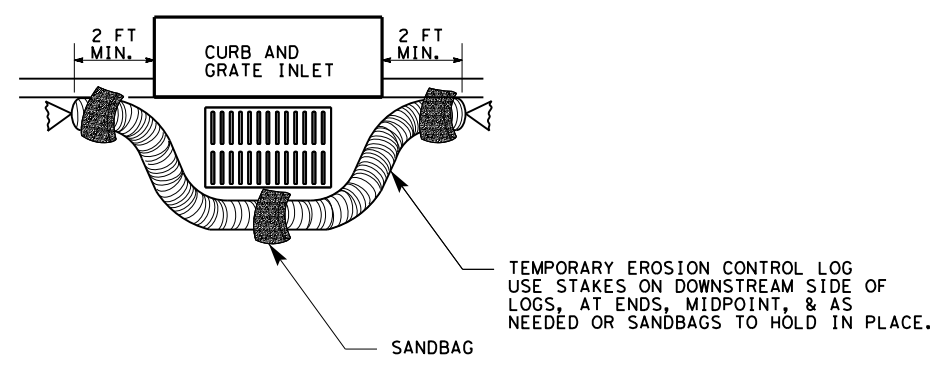





**EROSION CONTROL LOG AT CURB & GRADE INLET**

CL-GI

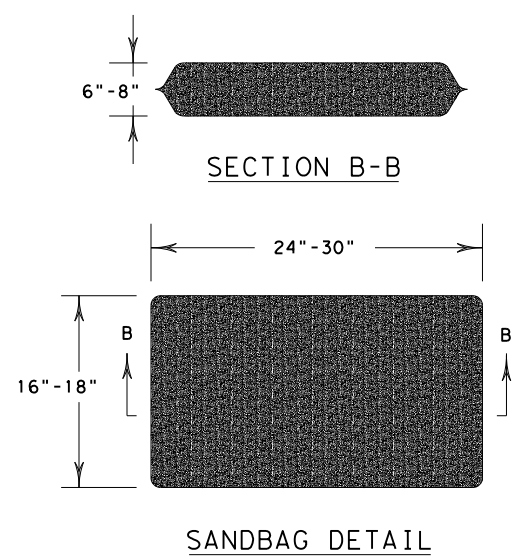


SHEET 3 OF 3

		<i>Design Division Standard</i>	
<b>TEMPORARY EROSION, SEDIMENT AND WATER POLLUTION CONTROL MEASURES</b> <b>EROSION CONTROL LOG</b> <b>EC (9) - 16</b>			
FILE: ec916	DN: TxDOT	CK: KM	DW: LS/PT
© TxDOT: JULY 2016	CONT	SECT	JOB
REVISIONS	0156	12	020
DIST	COUNTY		SHEET NO.
WFS	WICHITA		110

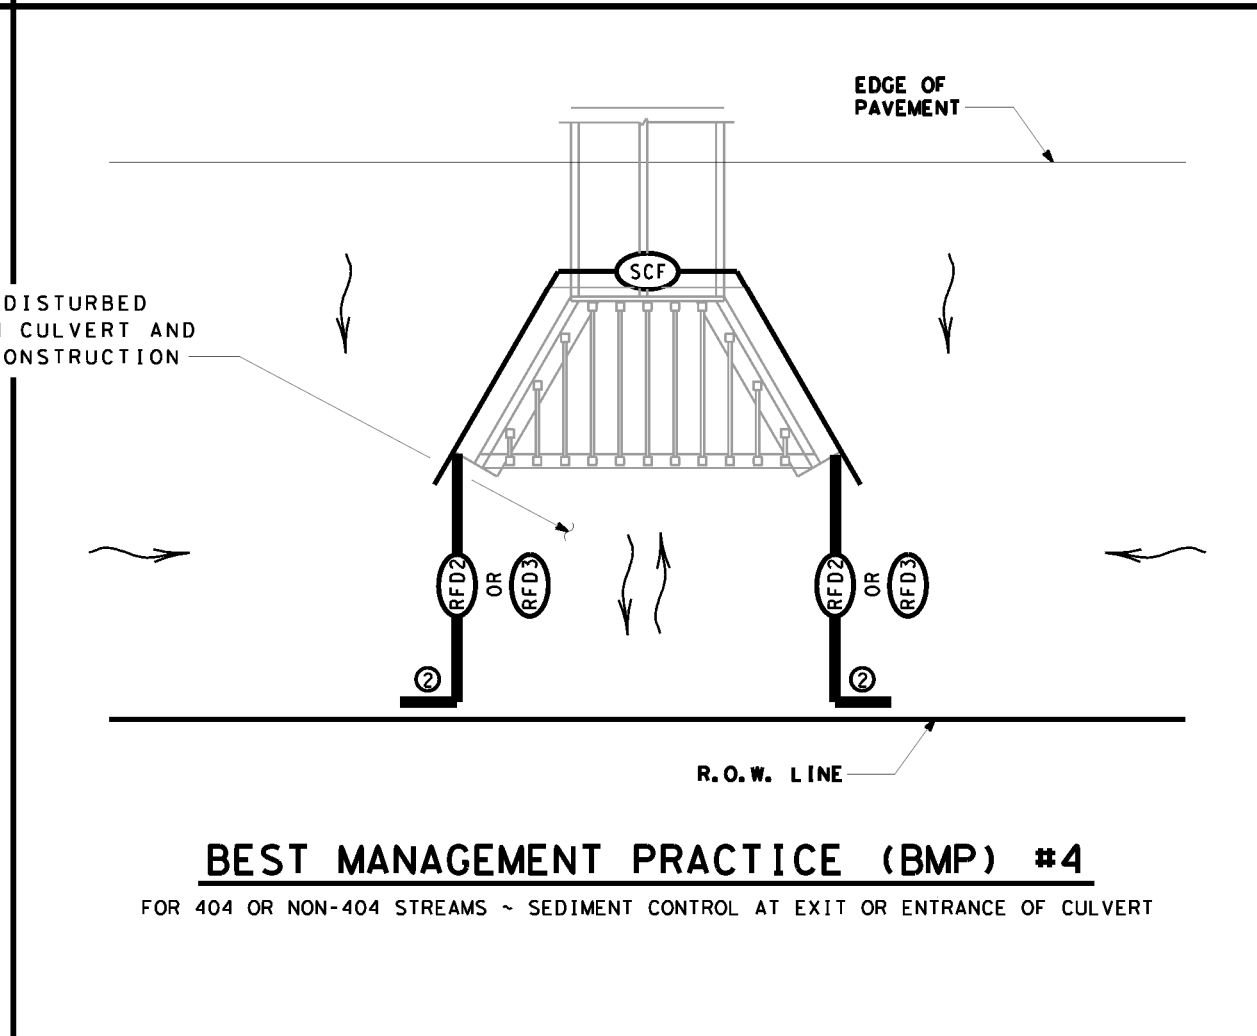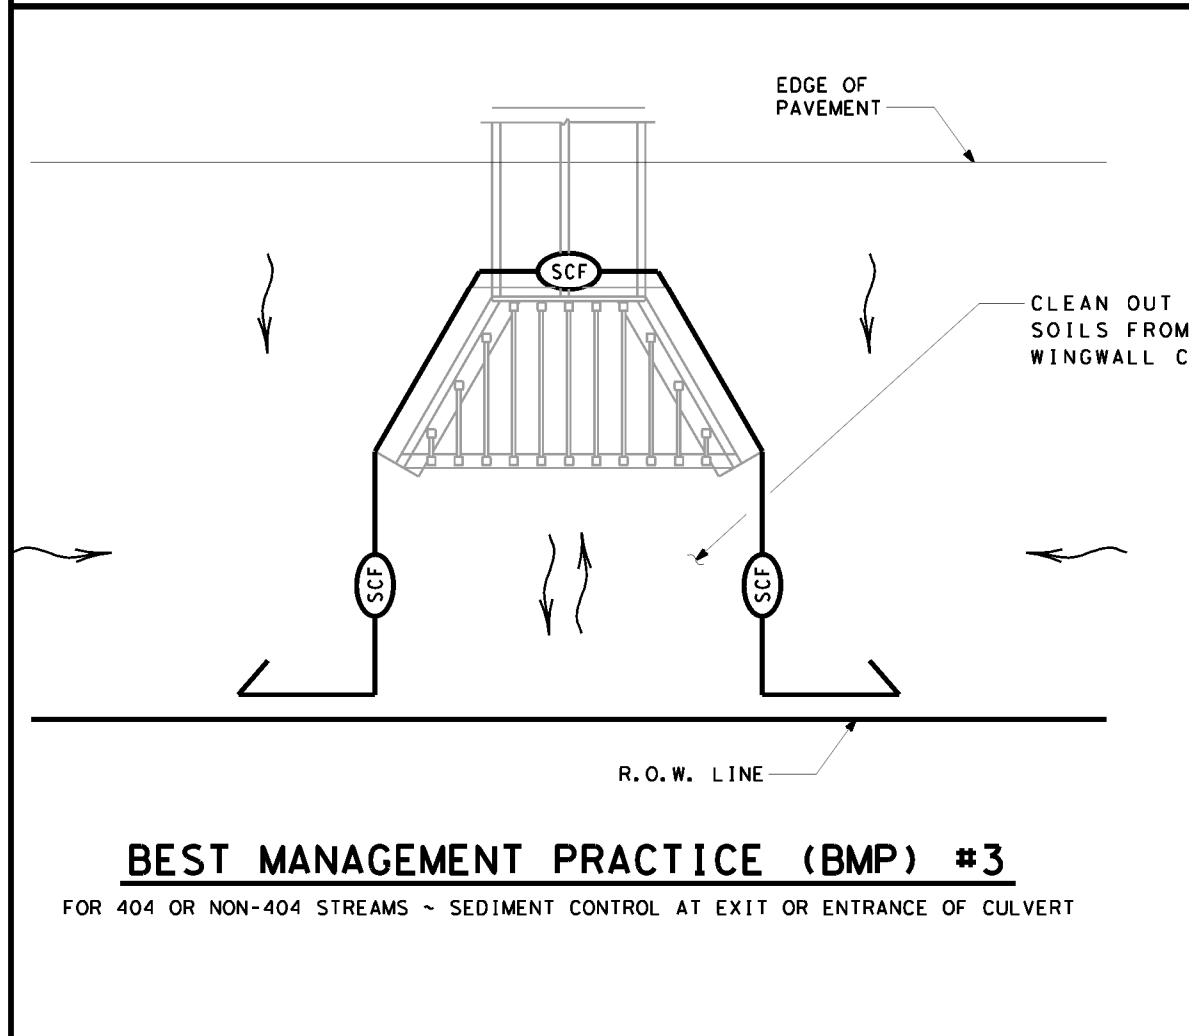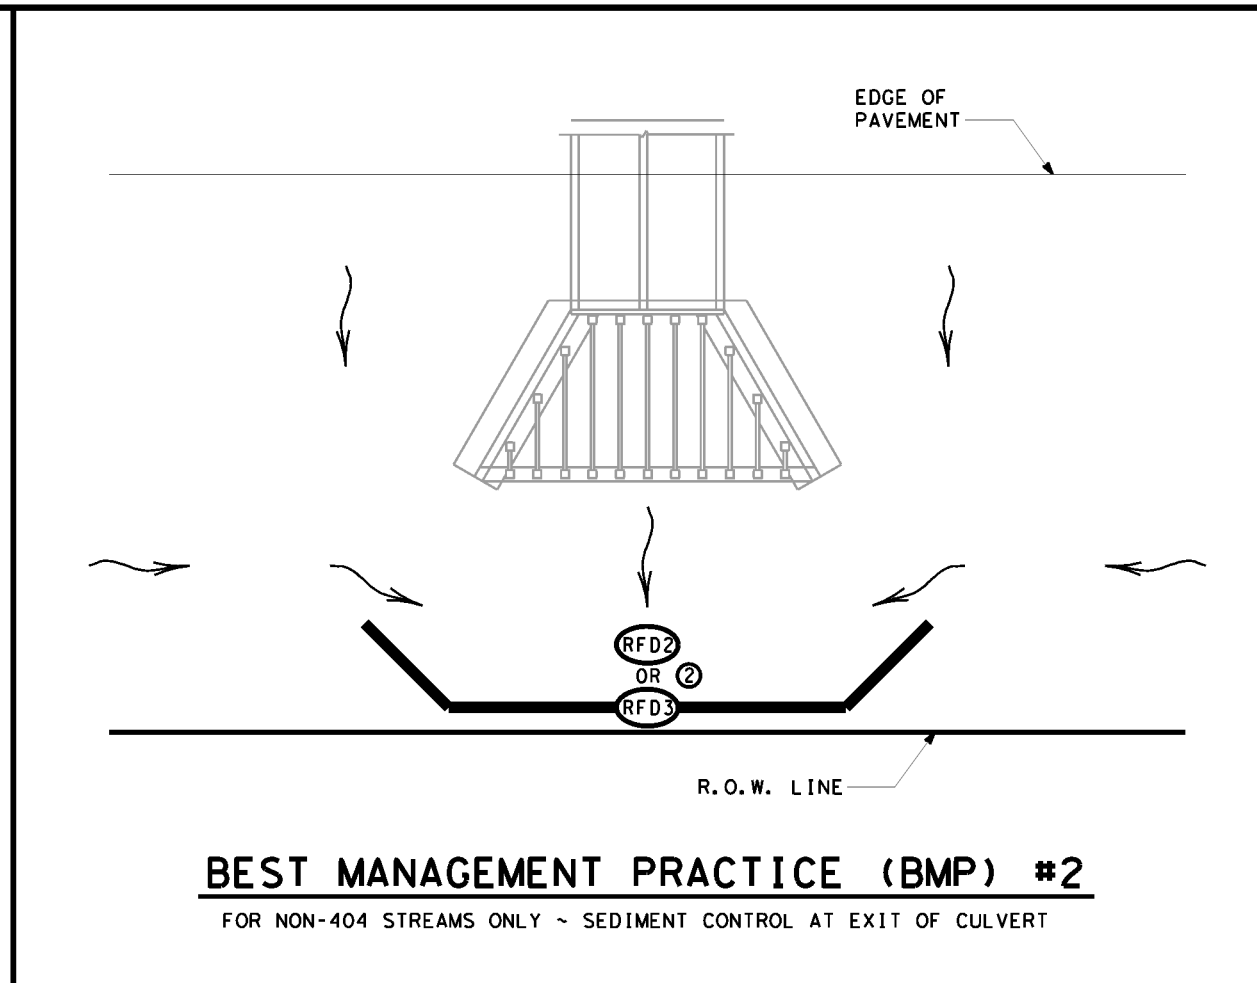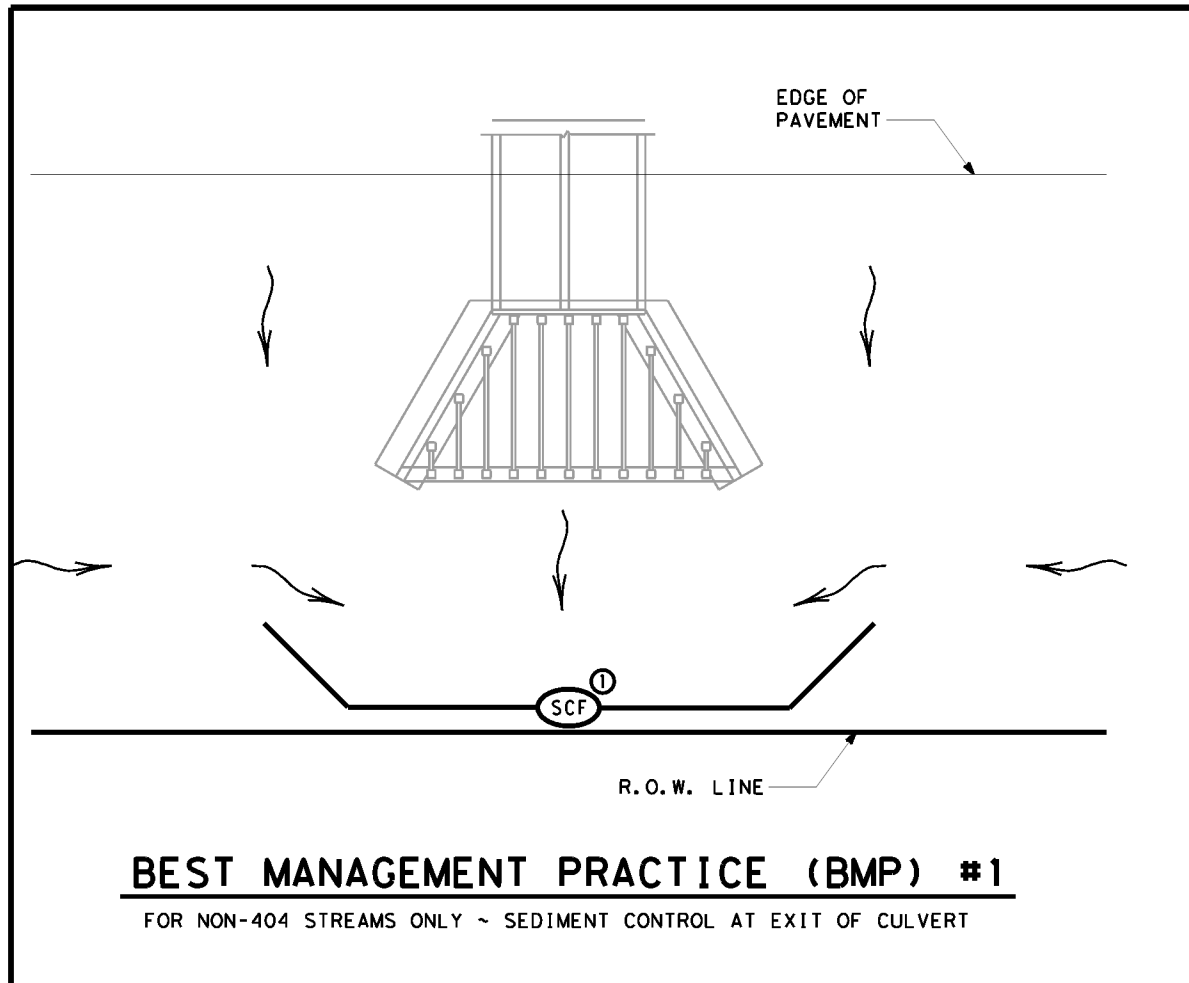

	SEDIMENT CONTROL FENCE
	ROCK FILTER DAM (TY 2)
	ROCK FILTER DAM (TY 3)
	DIRECTION OF FLOW

- NOTES:
- ① EXTEND SILT FENCE SO STORM WATER DOES NOT GO AROUND THE ENDS. USE L-HOOKS ON ENDS AS REQUIRED.
  - ② EXTEND ROCK FILTER DAM SO STORM WATER DOES NOT GO AROUND THE ENDS.



Bryson Lawrence, P.E.

03/26/2024





SCALE = NTS SHEET 1 OF 5

Texas Department of Transportation  
Wichita Falls District Standard

**TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES**


**WFS-TA-BMP**

FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CR: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS JULY 2019	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		111	

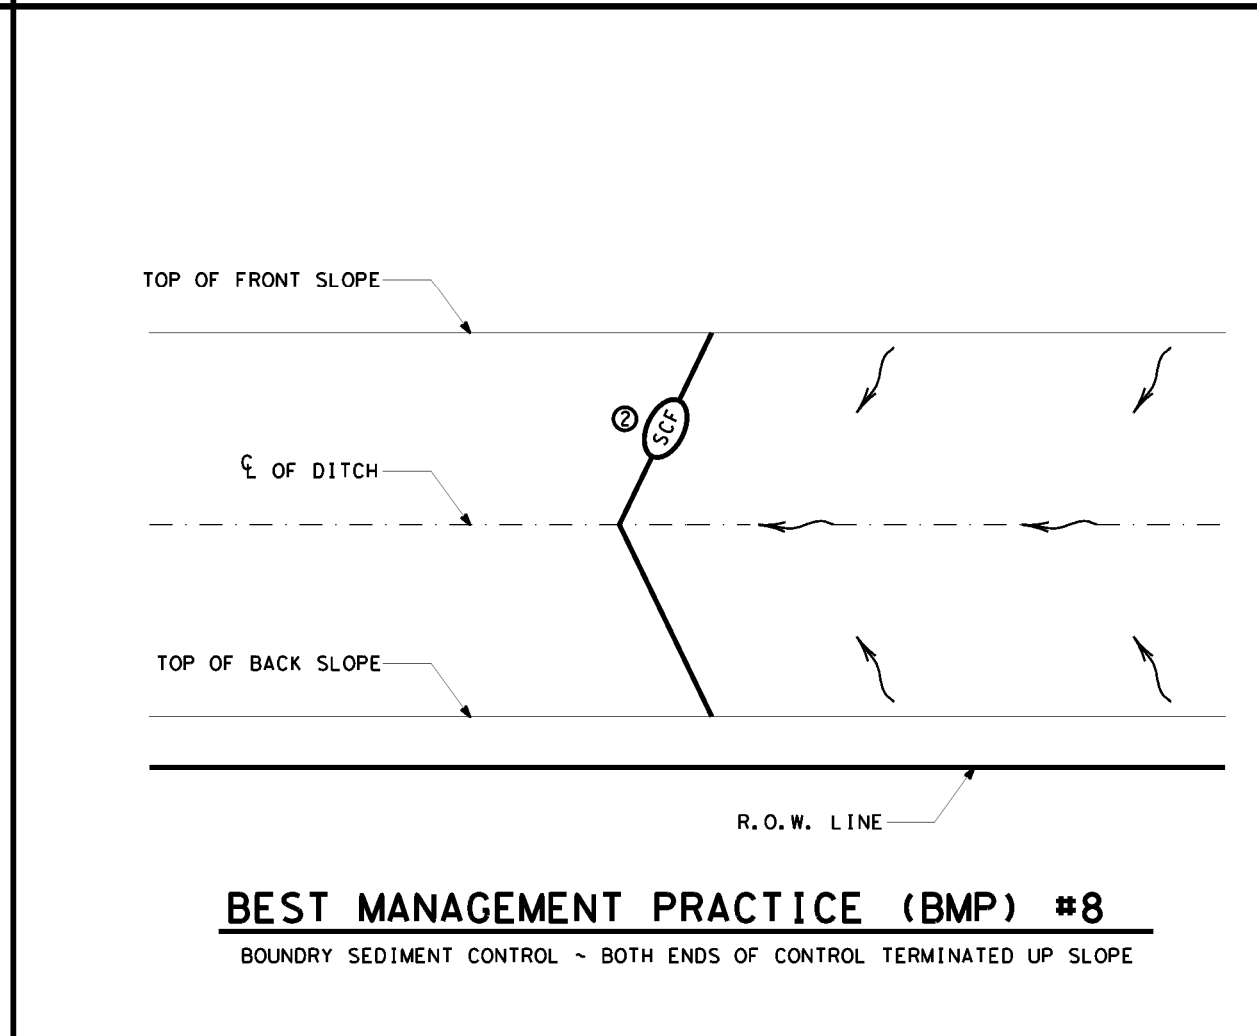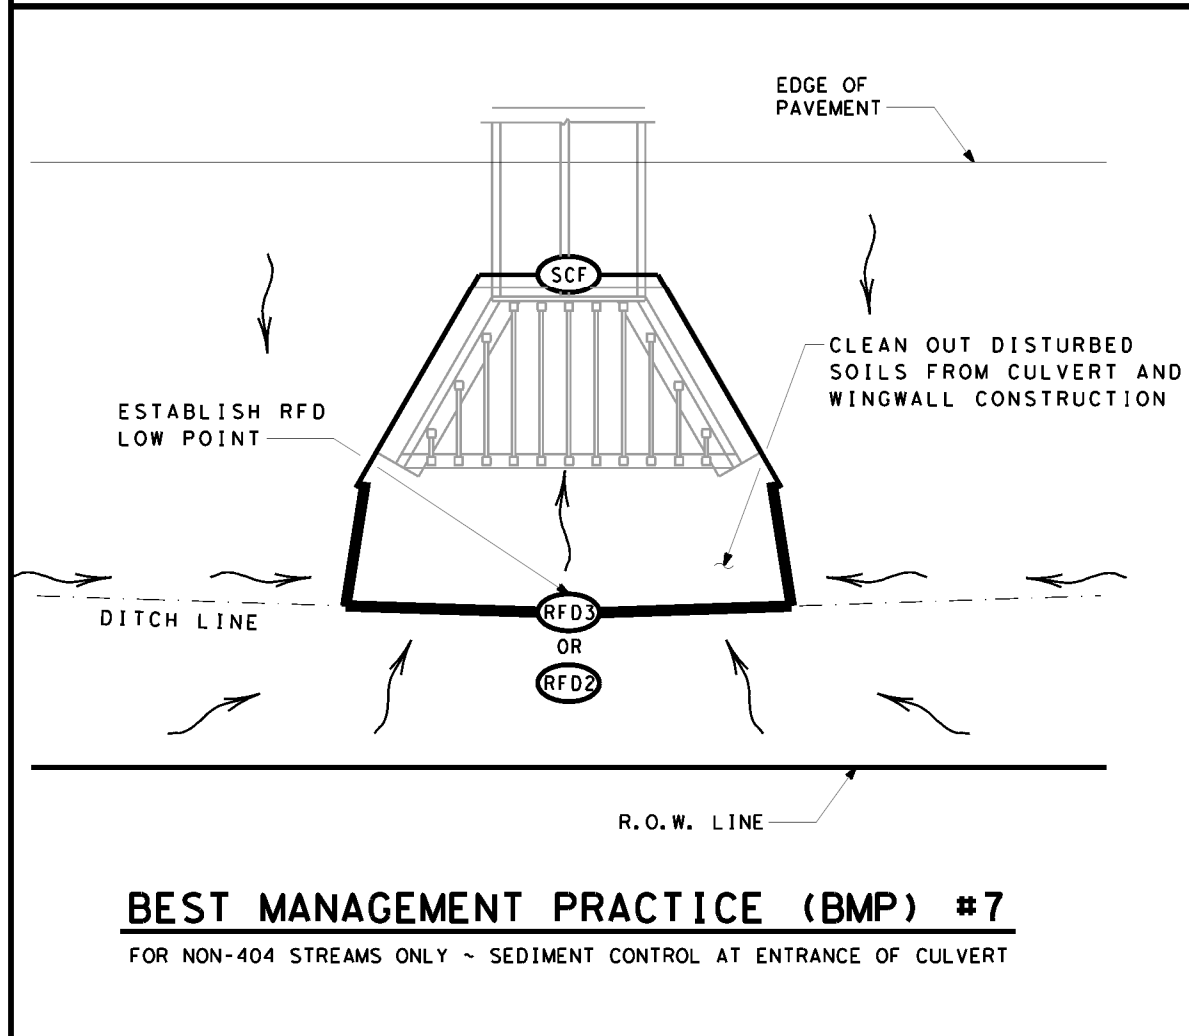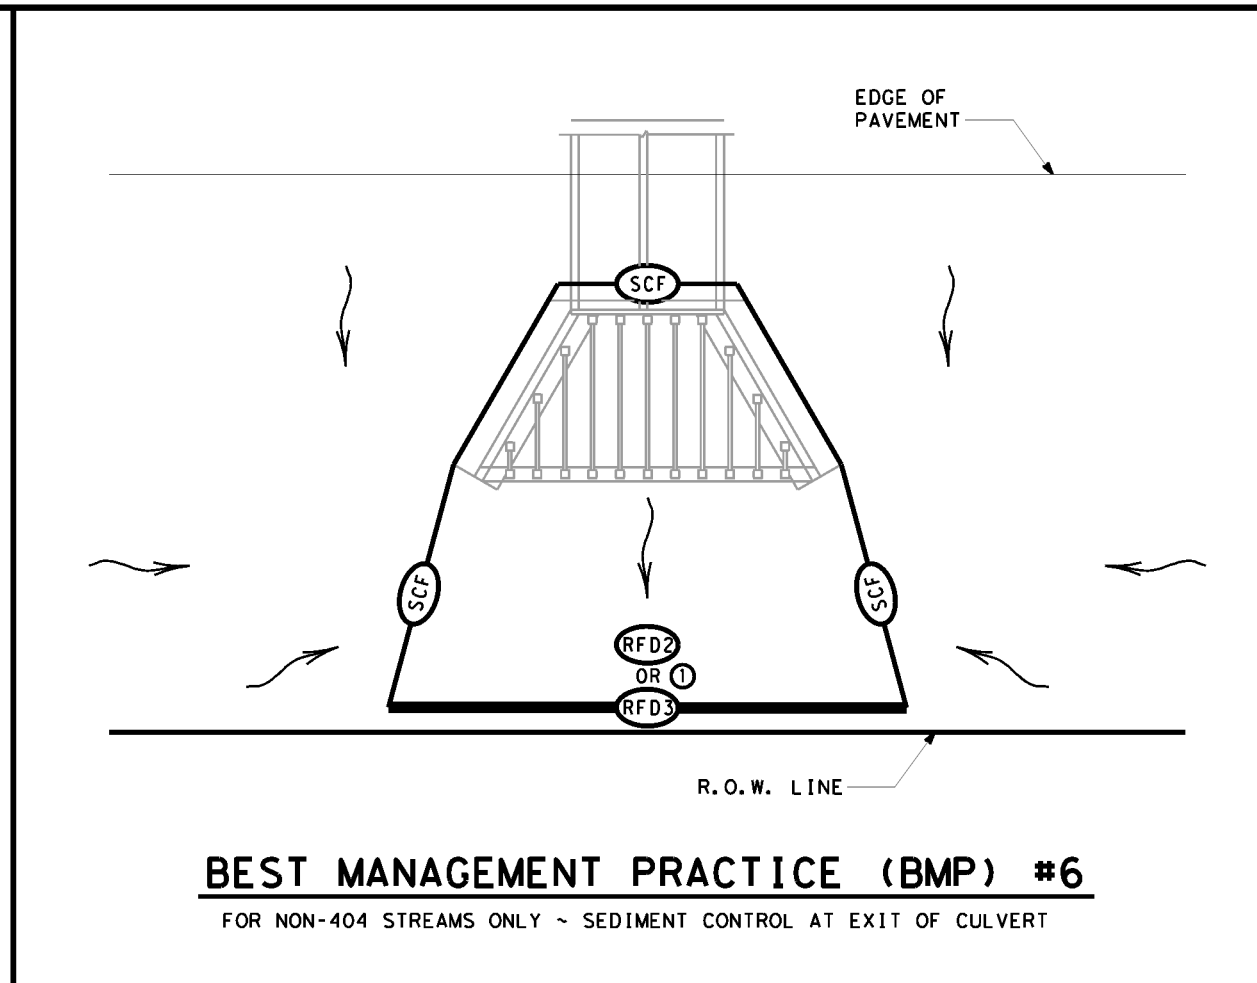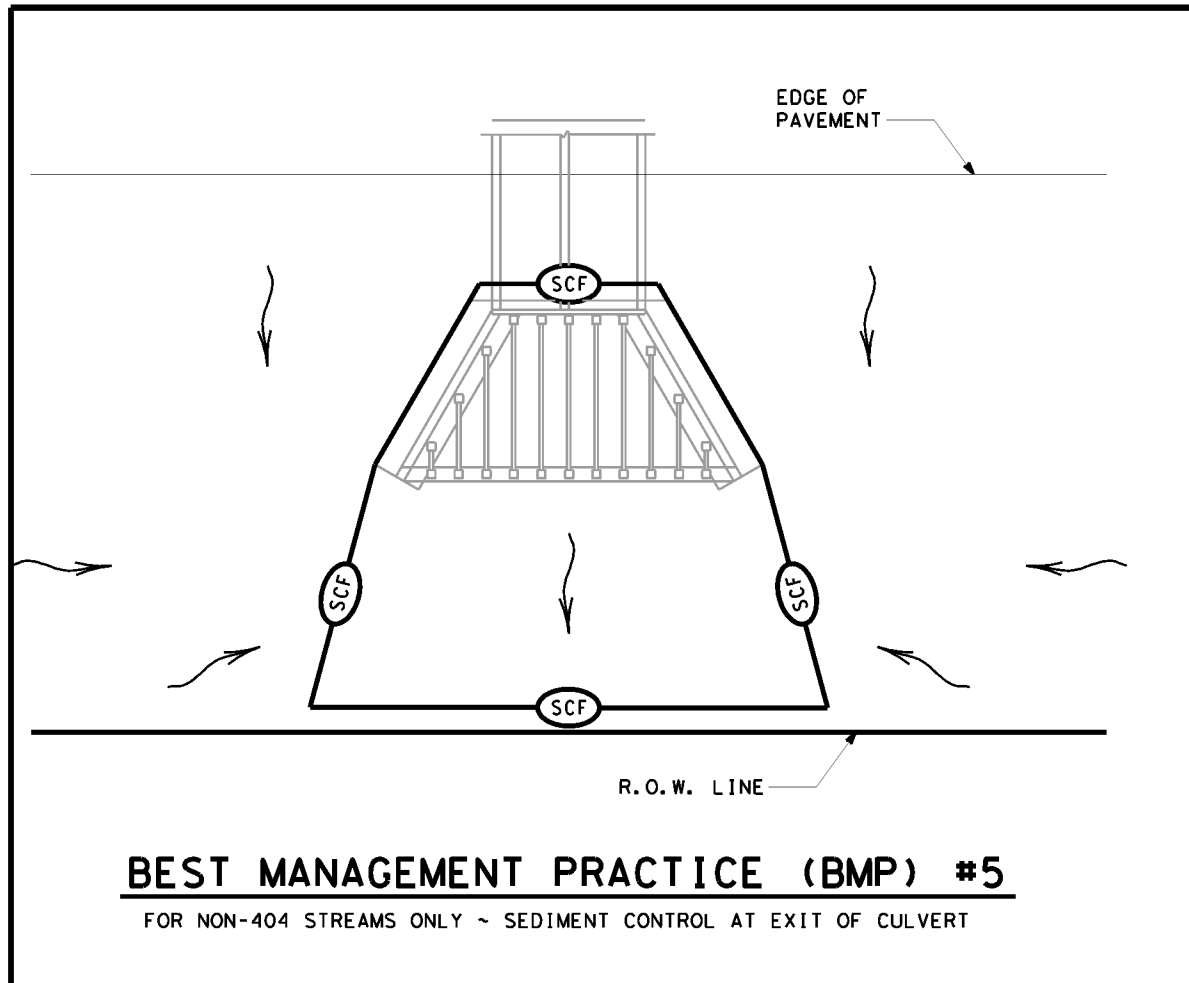

	SEDIMENT CONTROL FENCE
	ROCK FILTER DAM (TY 2)
	ROCK FILTER DAM (TY 3)
	DIRECTION OF FLOW

- NOTES:
- PROVIDE OVERLAP OF SILT FENCE WITH ROCK FILTER DAM.
  - ROCK FILTER DAMS OR EARTH/GRASSED EMBANKMENTS CAN BE SUBSTITUTED AS DIRECTED.



Bryson Lawrence, P.E.  
03/26/2024


SCALE = NTS SHEET 2 OF 5

Texas Department of Transportation  
Wichita Falls District Standard  
**TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES**

**WFS-TA-BMP**

FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CR: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS JULY 2019	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		112	



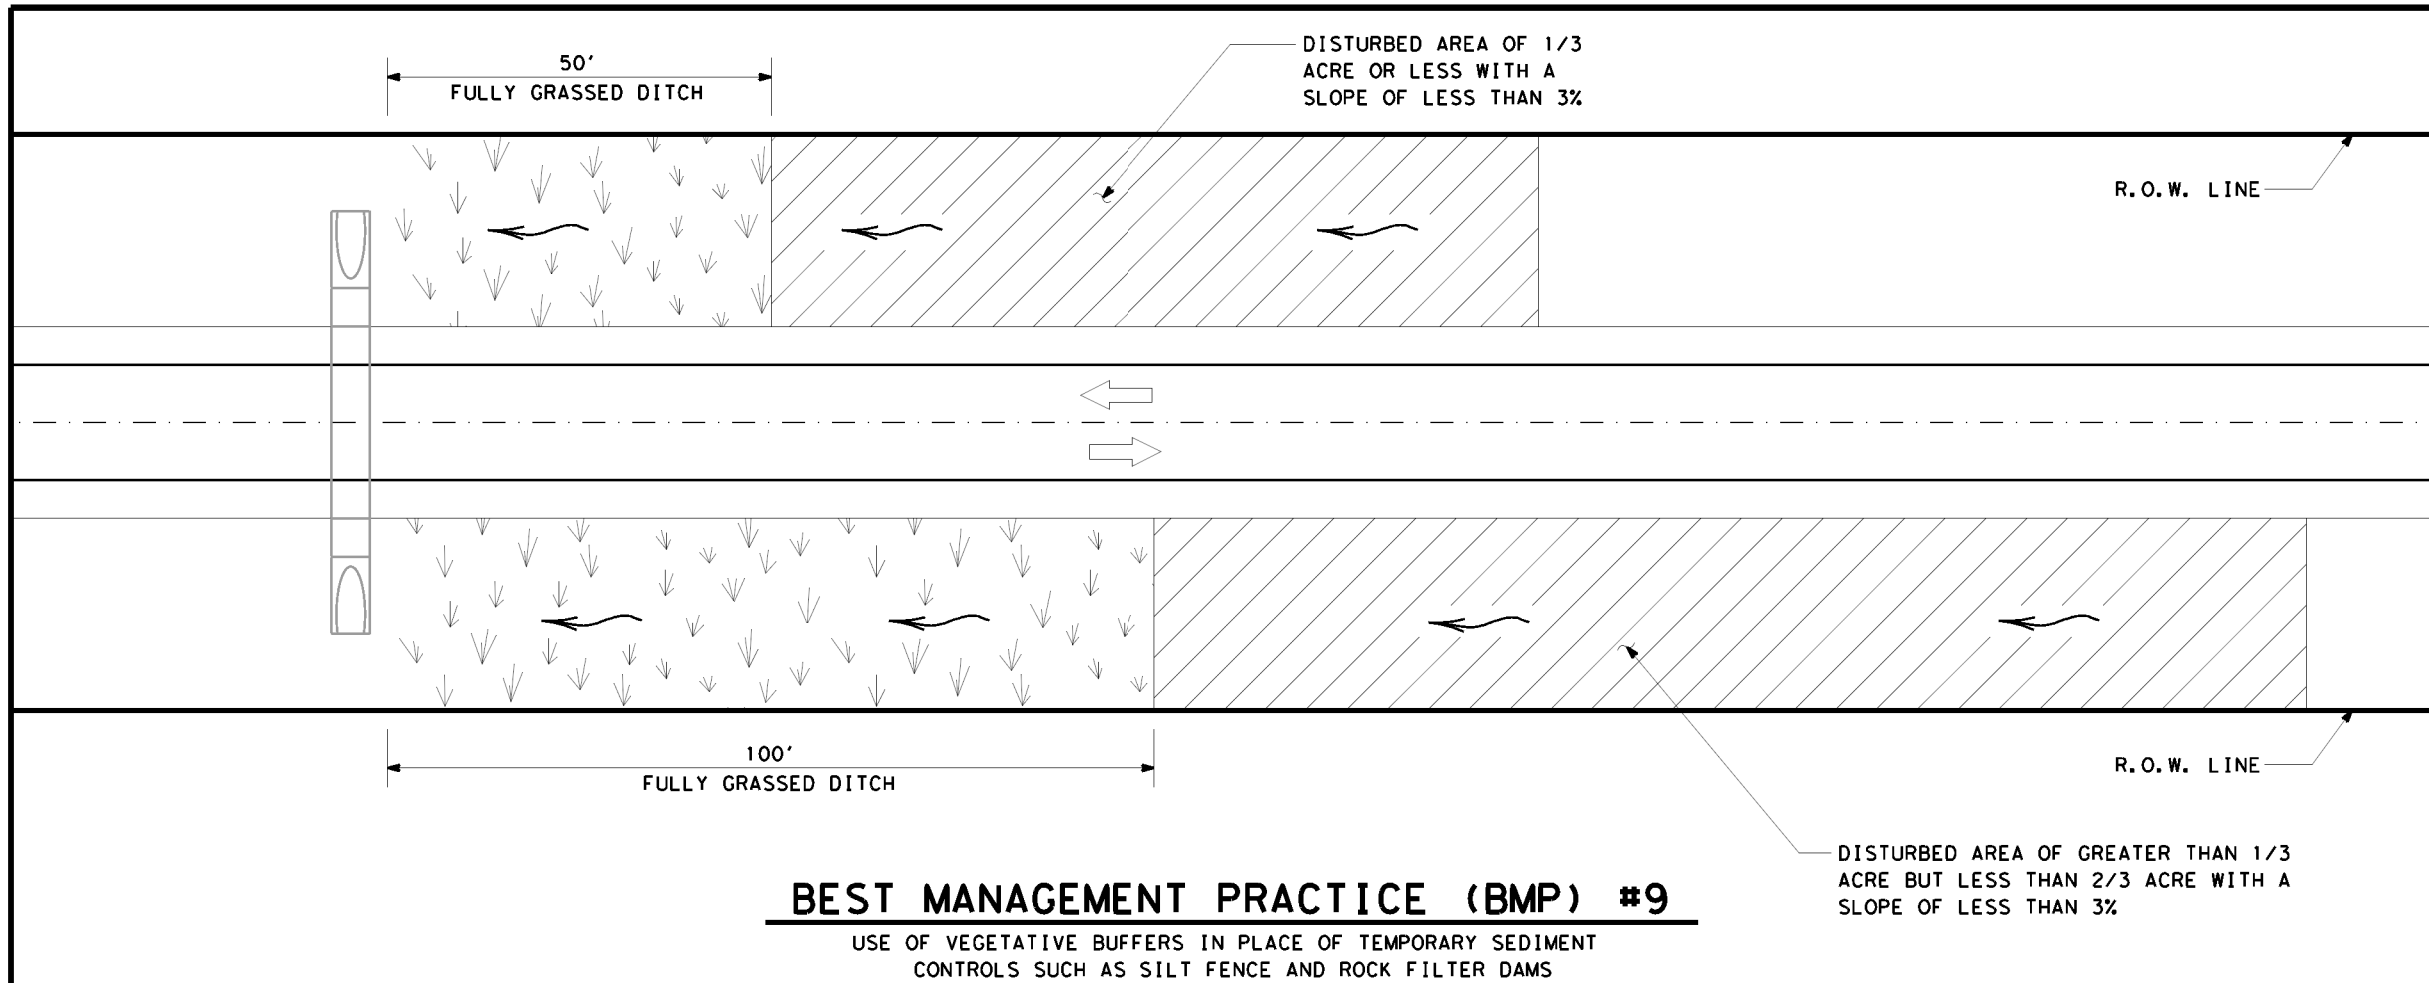


**BEST MANAGEMENT PRACTICE (BMP) #9**

USE OF VEGETATIVE BUFFERS IN PLACE OF TEMPORARY SEDIMENT CONTROLS SUCH AS SILT FENCE AND ROCK FILTER DAMS

	FULLY GRASSED DITCH
	DISTURBED AREA
	DIRECTION OF FLOW
	EROSION CONTROL LOG
	SOD


NOTES:

- ① SEDIMENT CONTROL FENCE, OR OTHER DEVICES CAN BE SUBSTITUTED AS DIRECTED BY THE ENGINEER.

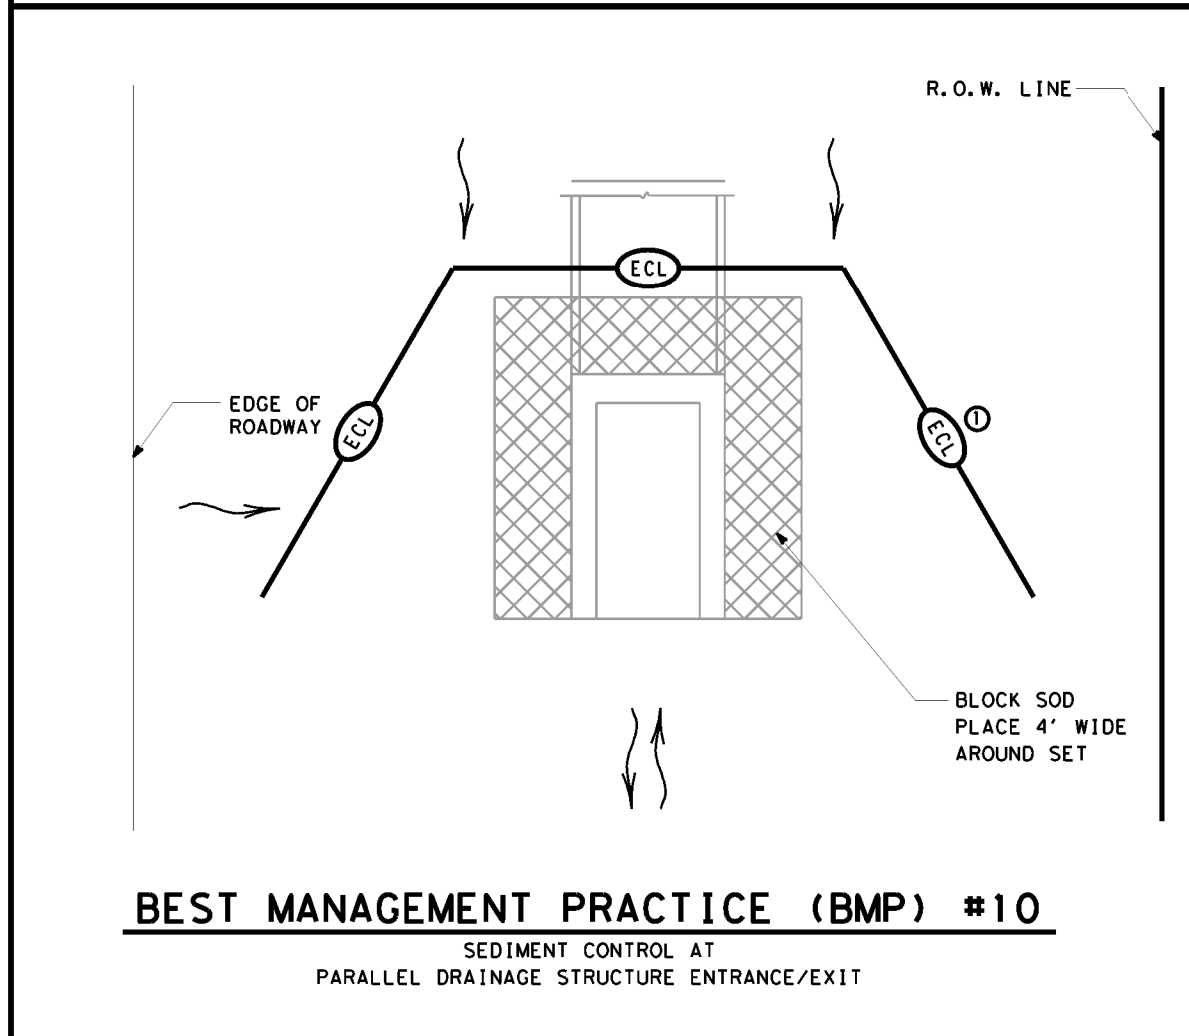

**BEST MANAGEMENT PRACTICE (BMP) #10**

SEDIMENT CONTROL AT PARALLEL DRAINAGE STRUCTURE ENTRANCE/EXIT

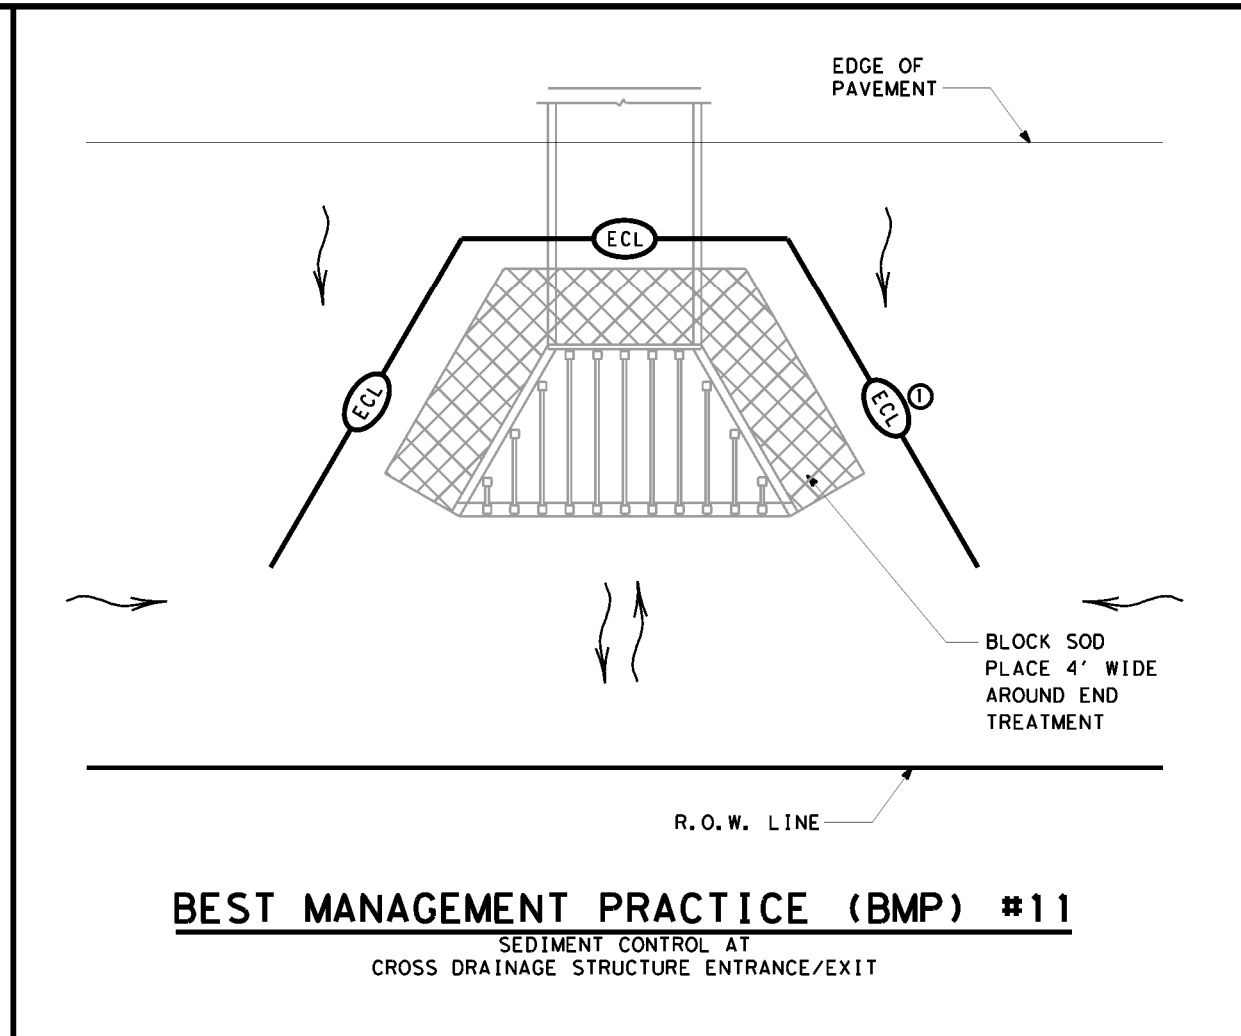

**BEST MANAGEMENT PRACTICE (BMP) #11**

SEDIMENT CONTROL AT CROSS DRAINAGE STRUCTURE ENTRANCE/EXIT



*Bryson Lawrence, P.E.*

03/26/2024

SCALE = NTS SHEET 3 OF 5

Texas Department of Transportation  
Wichita Falls District Standard

**TYPICAL APPLICATIONS FOR BEST MANAGEMENT PRACTICES**

**WFS-TA-BMP**

FILE: BMPLAYOUTS.dgn	DW: TXDOT	CK: TXDOT	PI: TXDOT	CR: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS JULY 2019	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		113	

DEPARTMENT MATERIAL SPECIFICATIONS

PLYWOOD SIGN BLANKS	DMS-7100
FLAT SURFACE REFLECTIVE SHEETING	DMS-8300
VINYL NON-REFLECTIVE DECAL SHEETING	DMS-8320

COLOR	USAGE	REFLECTIVE SHEETING OR OTHER MATERIAL
WHITE	BACKGROUND	TYPE C (FLUORESCENT PRISMATIC)
BLACK	LEGEND & BORDERS	VINYL NON-REFLECTIVE DECAL SHEETING

SIGN GENERAL NOTES:

A. THE ALPHABETS AND LATERAL SPACING BETWEEN LETTERS AND NUMERALS SHALL CONFORM WITH THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS", (TMUTCD) LATEST EDITION, AND THE "COMPLIANT WORK ZONE TRAFFIC CONTROL DEVICES LIST". LATERAL SPACING OF TEXT SHALL PROVIDE A BALANCED APPEARANCE. ALL MATERIALS SHALL CONFORM TO DEPARTMENT SPECIFICATIONS.


B. LEGEND AND BORDER MAY BE APPLIED BY REVERSE SCREENING PROCESS WITH TRANSPARENT COLORED INK, CUT-OUT WHITE REFLECTIVE SHEETING APPLIED TO COLORED BACKGROUND OR COMBINATION THEREOF. BACKGROUND SHALL BE REFLECTIVE SHEETING TYPE C.

C. FINAL SIGN LOCATION SHALL BE AS APPROVED BY THE ENGINEER. IF THE SIGN CANNOT BE PLACED OUTSIDE THE CLEAR ZONE, IT MUST ADHERE TO THE TMUTCD. IF PLACED OUTSIDE THE CLEAR ZONE, SIGN MAY BE PLACED PERPENDICULAR OR PARALLEL TO ROW LINE.


D. SIGN DIMENSION IS 42" WIDE X 24" TALL WITH 5" BLACK LETTERS.

Concrete Washout

CONCRETE WASHOUT SIGN DETAIL 10

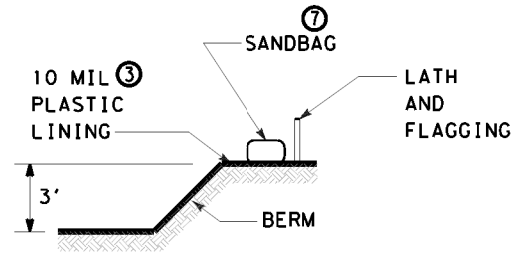


SECTION A-A

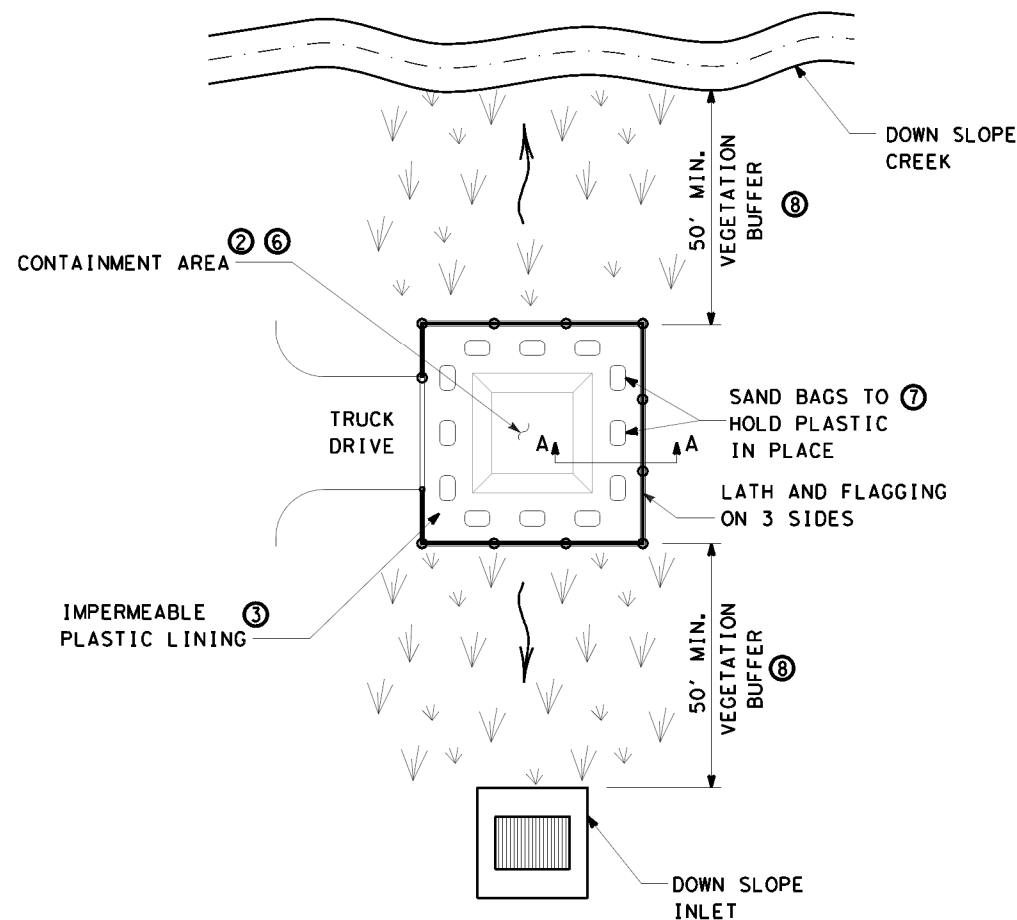


BEST MANAGEMENT PRACTICE (BMP) #12

CONCRETE TRUCK WASHOUT AREA 10

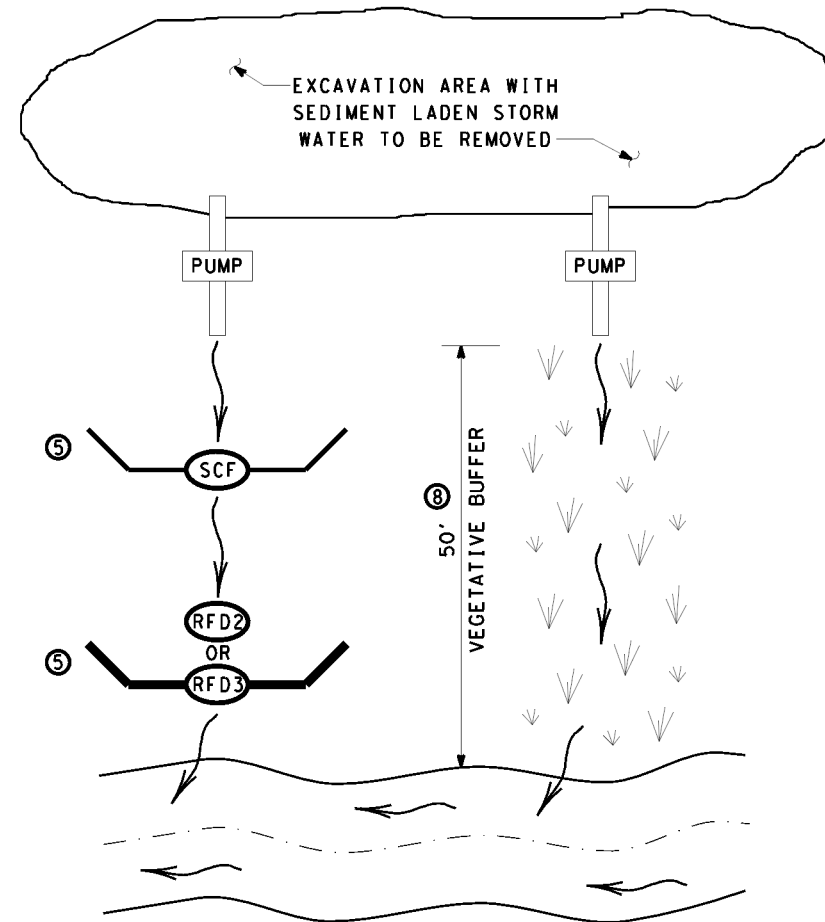

BEST MANAGEMENT PRACTICE (BMP) #13

PUMPED STORM WATER SEDIMENT CONTROLS 1

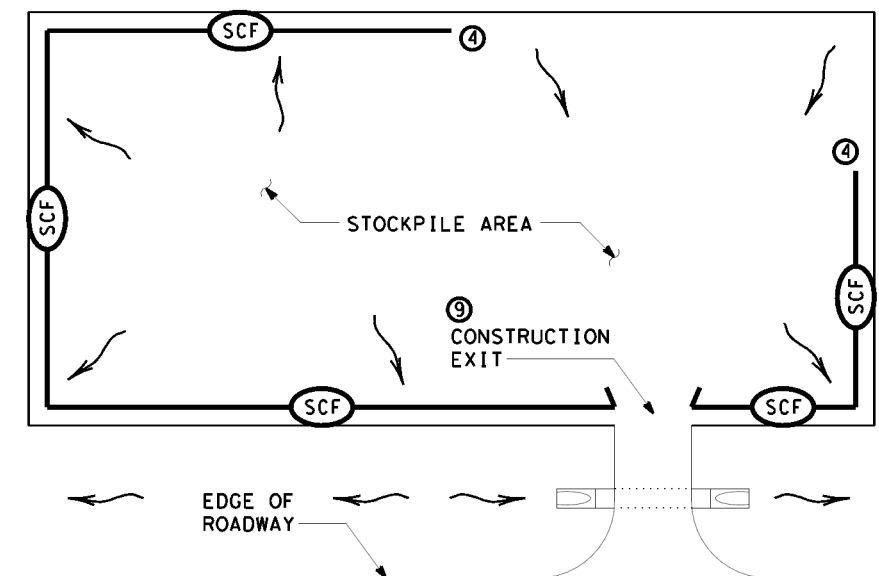

BEST MANAGEMENT PRACTICE (BMP) #14

STOCKPILE SEDIMENT CONTROL

	VEGETATIVE BUFFER
	DIRECTION OF FLOW
	SEDIMENT CONTROL FENCE
	ROCK FILTER DAM (TY 2)
	ROCK FILTER DAM (TY 3)

NOTES:

- 1 PUMPED STORM WATER FROM AN EXCAVATION AREA SHOULD BE DISCHARGED IN A 50' VEGETATIVE BUFFER OR THROUGH TWO TEMPORARY SEDIMENT CONTROLS.
- 2 WHEN CONTAINMENT AREA REACHES 1' FREEBOARD, DISCONTINUE WASHOUT PLACEMENT AND REMOVE MATERIAL UPON SOLIDIFICATION.
- 3 EACH TIME SOLIDIFIED MATERIAL IS REMOVED REPLACE PLASTIC SHEETING. USE 10 MIL PLASTIC LINING MINIMUM.
- 4 START SEDIMENT CONTROL AT LOCATION SO ALL STORM WATER WITH SEDIMENT IS COLLECTED
- 5 ROCK FILTER DAMS, SEDIMENT CONTROL FENCE, OR OTHER DEVICES CAN BE SUBSTITUTED AS DIRECTED.
- 6 ACTUAL SIZE, LAYOUT, & LOCATION WILL BE DETERMINED IN THE FIELD.
- 7 AN EARTHEN BERM MAY BE USED IN LIEU OF SANDBAGS.
- 8 VEGETATIVE BUFFER SHOULD HAVE AT A MINIMUM 70% VEGETATIVE COVERAGE
- 9 PLACEMENT OF DEVICES FOR OFFSITE TRACKING AS APPLICABLE AND/OR DIRECTED BY THE ENGINEER.
- 10 ALL ITEMS REQUIRED FOR CONCRETE WASHOUT AND SIGN SHALL BE SUBSIDIARY TO ITEM 506.



Bryson Lawrence, P.E.

03/26/2024


SCALE = NTS SHEET 4 OF 5

Texas Department of Transportation  
Wichita Falls District

TYPICAL APPLICATIONS  
FOR  
BEST MANAGEMENT  
PRACTICES

WFS-TA-BMP


FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DN: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS JULY 2019	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		114	

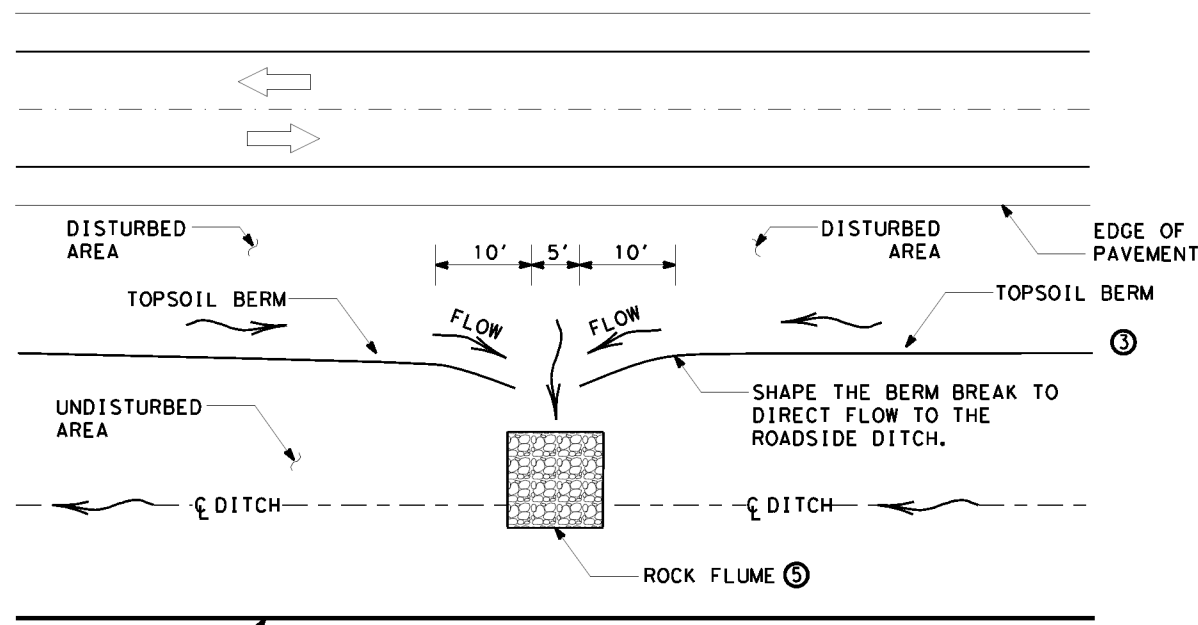


"BERM BREAK"  
DETAIL  
PLAN VIEW ②

**BEST MANAGEMENT PRACTICE (BMP) #15**

SEDIMENT CONTROL AND BERM DETAIL  
WITH BERM ON FRONTSLOPE

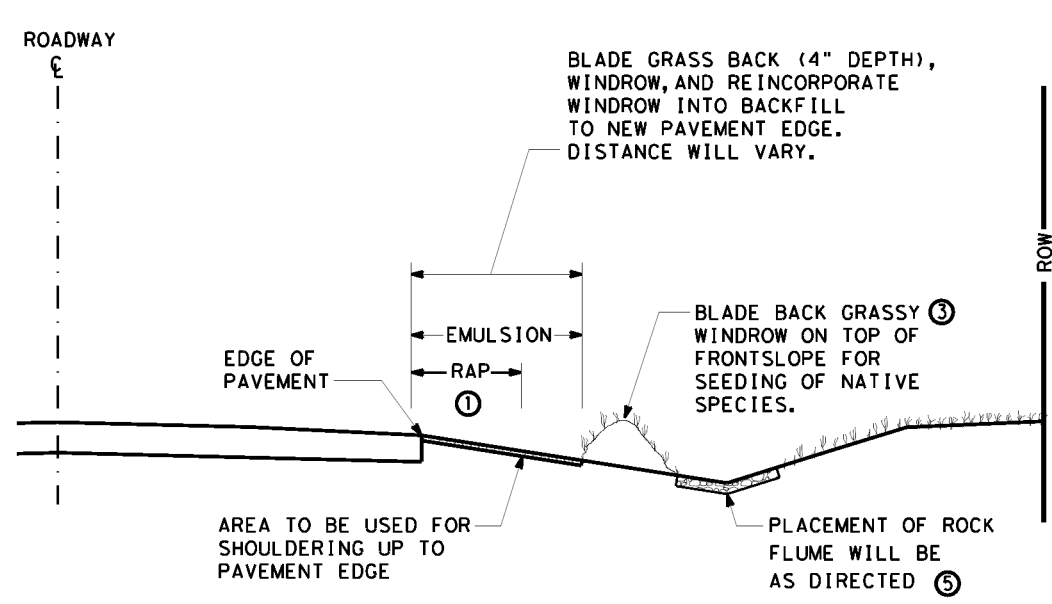


TYPICAL DITCH SECTION  
SHOWING BERM/WINDROW OF TOPSOIL

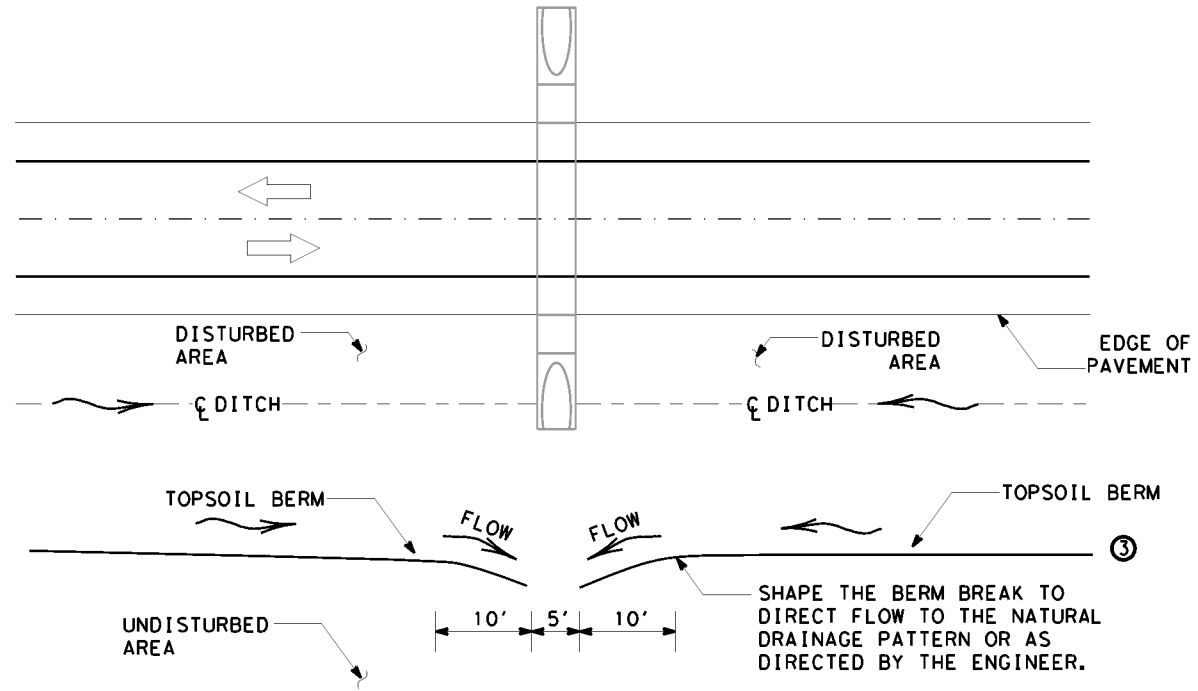

"BERM BREAK"  
DETAIL  
PLAN VIEW ②

**BEST MANAGEMENT PRACTICE (BMP) #16**

SEDIMENT CONTROL AND BERM DETAIL AT CROSS DRAINAGE STRUCTURE  
WITH BERM ON BACKSLOPE

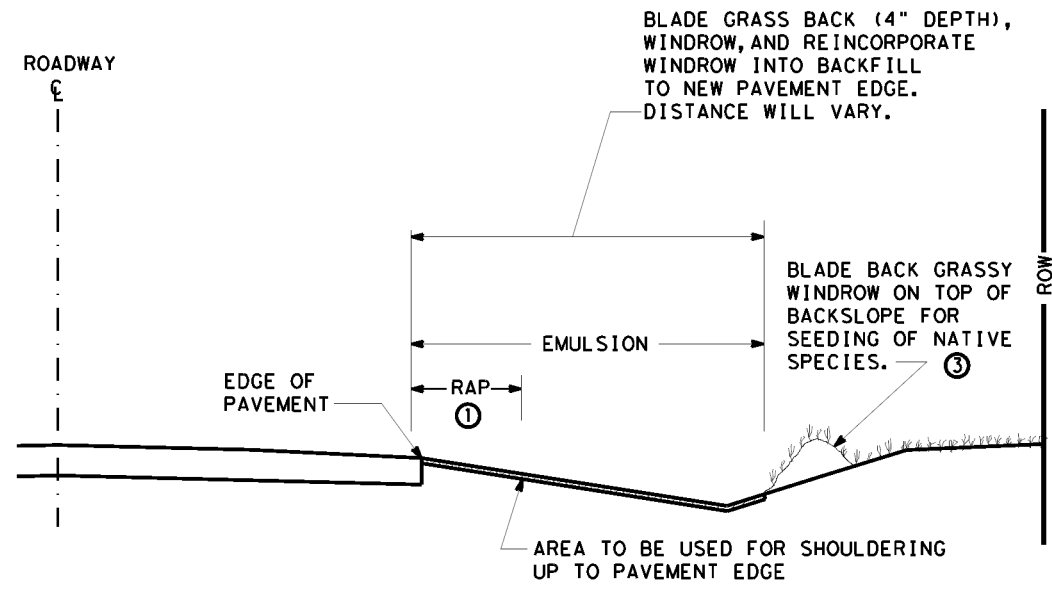

TYPICAL DITCH SECTION  
SHOWING BERM/WINDROW OF TOPSOIL

	FULLY GRASSED DITCH
	DISTURBED AREA
	DIRECTION OF FLOW
	SEDIMENT CONTROL FENCE
	ROCK FLUME-ENERGY DISSIPATOR
	BERM

- NOTES:
- AS DIRECTED PLACE RAP ADJACENT TO EDGE OF PAVEMENT AS A BACKFILL MATERIAL. PLACEMENT DISTANCE IS TO BE A MINIMUM OF 4' OR AS NEEDED TO ACHIEVE SMOOTH TIE IN TO EXISTING FRONT SLOPE.
  - BREAK BERM SO THAT MAXIMUM FLOW LENGTH ALONG THE BERM IS LESS THAN 1000'. BREAK BERM IN LOW AREAS WHERE FLOW MAY OVERTOP THE BERM. DO NOT BREAK BERM ON HILLTOPS OR WHERE RUNOFF AND SEDIMENT FLOW DIRECTLY OFF THE ROW.
  - LOCATION OF BERM WILL VARY. BERM COULD BE PLACED ON FRONTSLOPE OR BACKSLOPE DEPENDING ON FIELD CONDITIONS. SEE SPECIFIC SW3P LAYOUT SHEET FOR MORE DETAILS ON LOCATION OF BERM.
  - ROCK FILTER DAMS, SEDIMENT CONTROL FENCE, EROSION CONTROL LOGS, ROCK FLUME, OR OTHER DEVICES CAN BE SUBSTITUTED AS DIRECTED. DEVICE MAY NOT BE NEEDED IN ALL LOCATIONS. SEE SPECIFIC SW3P LAYOUT SHEET FOR MORE DETAILS ON LOCATION OF DEVICES.
  - PLACE ROCK FLUME DISSIPATOR AS DIRECTED BY THE ENGINEER. SIZE AND LOCATIONS OF ROCK FLUME WILL VARY. PROVIDE ROCK OR RUBBLE WITH A 3" TO 6" AGGREGATE. SECURE ROCK WITH 20-GAUGE GALVANIZED WOVEN WIRE MESH WITH 1" DIAMETER HEXAGONAL OPENINGS. ROCK SHOULD BE PLACED ON THE UPSTREAM SIDE OVER THE ROCK AND TIGHTLY SECURED TO ITSELF ON THE DOWNSTREAM SIDE USING WIRE TIES. PAYMENT WILL BE MADE BY ITEM TEMP PAVED FLUME (INSTALL).



Bryson Lawrence, P.E.  
03/26/2024

SCALE = NTS SHEET 5 OF 5

Texas Department of Transportation  
Wichita Falls District Standard

**TYPICAL APPLICATIONS  
FOR  
BEST MANAGEMENT  
PRACTICES**

**WFS-TA-BMP**

FILE: BMPLAYOUTS.dgn	DW: TXDOT	CK: TXDOT	DR: TXDOT	CR: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS JULY 2019	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		115	

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (PERMANENT) (URBAN) (SAND or CLAY)		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
PERMANENT: EARLY SPRING SEED FROM FEBRUARY 1st THROUGH May 15th. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP: BUFFALO GRASS (Texoka) COMMON BERMUDA GRASS (HULLED) BLUE GRAMA (NATIVE)	4.0 LBS PLS / ACRE 5.0 LBS PLS / ACRE 1.5 LBS PLS / ACRE @1/4 -1/2" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (PERMANENT) (RURAL) (CLAY)		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
PERMANENT: EARLY SPRING SEED FROM FEBRUARY 1st THROUGH May 15th. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP: GREEN SPRANGLETOP SIDEOATS GRAMA BUFFALOGRASS BERMUDA GRASS BLACKWELL SWITCHGRASS ILLINOIS BUNDLEFLOWER	1.5 LBS PLS / ACRE 1.5 LBS PLS / ACRE 3.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 0.5 LBS PLS / ACRE @1/4 -1/2" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		


ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (PERMANENT) (RURAL) (SANDY)		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
PERMANENT: EARLY SPRING SEED FROM FEBRUARY 1st THROUGH May 15th. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP: GREEN SPRANGLETOP BERMUDA GRASS SAND LOVEGRASS SAND DROPSEED WEEPING LOVEGRASS BLUE GRAMA PARTRIDGE PEAS (COMANCHE)	1.5 LBS PLS / ACRE 2.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE 1.0 LBS PLS / ACRE @1/4 -1/2" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (URBAN) WARM SEASON SEEDING		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: LATE SPRING & SUMMER SEED FROM MAY 16th THROUGH AUGUST 31st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) COMMON BERMUDA GRASS (UNHULLED) FOXTAIL MILLET	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 15. LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (RURAL) WARM SEASON SEEDING		
"WARM SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: LATE SPRING & SUMMER SEED FROM MAY 16th THROUGH AUGUST 31st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) BERMUDA GRASS (UNHULLED) GREEN SPRANGLETOP FOXTAIL MILLET	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 20. LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

NOTES:

1. SEE NOTES ON TA-VES SHEET 2 OF 2 FOR ADDITIONAL INFORMATION.



*Bryson Lawrence, P.E.*

03/26/2024

SCALE = NTS SHEET 1 OF 2

Texas Department of Transportation  
Wichita Falls District Standard

**TYPICAL APPLICATION  
FOR  
VEGETATION  
ESTABLISHMENT SHEET**

**WFS-TA-VES**

FILE: BMPLAYOUTS.dgn	DN: TXDOT	CK: TXDOT	DW: TXDOT	CR: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
REVISIONS JULY 2019	0156	12	020	SS 447
DIST	COUNTY		SHEET NO.	
WFS	WICHITA		116	

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (URBAN) COOL SEASON SEEDING		
"COOL SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: EARLY FALL SEED FROM SEPTEMBER 1st THROUGH DECEMBER 1st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) COMMON BERMUDA GRASS (UNHULLED) TALL FESCUE ANNUAL RYE GRASS	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 15.0 LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

ITEM 164 SEEDING FOR EROSION CONTROL		
SEED (TEMPORARY) (RURAL) COOL SEASON SEEDING		
"COOL SEASON" PLANTING DATES	SEED MIXTURE	PURE LIVE SEED RATE & PLANT DEPTH.
TEMPORARY: EARLY FALL SEED FROM SEPTEMBER 1st THROUGH DECEMBER 1st. AS AREAS OF THE ROW ARE PREPARED AND DETERMINED READY FOR DRILL SEEDING.	NEW CROP SEED: TYPE : BUFFALOGRASS (TEXOKA) BERMUDA GRASS (UNHULLED) GREEN SPRANGLETOP WESTERN WHEATGRASS CANADA WILD RYE GRASS ELBON RYE GRASS	3.0 LBS PLS / ACRE 4.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 3.0 LBS PLS / ACRE 2.0 LBS PLS / ACRE 15.0 LBS PLS / ACRE @ 1" Soil Depth
SOIL PREPARATION EQUIPMENT AND PRACTICES: RIPPER --- DISK --- HARROW --- CULTI-PACKER .		

NOTES:

1. ALL SEED MIXTURE TYPES SHALL BE PURCHASED IN PRE- MIXED BAGS, "BY TYPE" BLENDED BY THE GROWER SHIPPER.
2. SOILS THAT ARE COMPACTED, HAVE CLODS, SHALL BE REWORKED UNTIL READY FOR SEEDING. AS DIRECTED.
3. ALL SOIL SURFACES SHALL BE LEVEL WITH NATURAL FLOWING SMOOTH GRADES. NO TIRE RUTS OR FURTHER TRAFFIC ALLOWED.
4. SOIL SURFACE SHALL BE FIRM BUT NOT COMPACTED, ALLOWING 1/4" DEPRESSION UNDER NORMAL FOOT TRAFFIC.
5. SEED 100% OF THE BED AREA. NO SKIPS OR VOID AREAS ALLOWED. EXAMPLE: AREAS AROUND SIGN POSTS AND INLETS.
6. SEED UP TO THE FIRST 6" OF THE EDGE OF PAVEMENT. AS DIRECTED, HAND RAKE ISOLATED SEEDED AREAS.
7. WEIGH ALL CALIBRATED SEED SAMPLES FOR ACCURACY AND PRESENT DOCUMENTATION TO ENGINEER.

FOR DRILL SEEDING


8. USE ONLY PROFESSIONAL NATIVE GRASS OR TURF GRASS (MULTI- 3 BIN) DRILL SEEDERS. NO DROP SEEDERS ALLOWED. OTHER TYPES OF SEEDERS AS APPROVED BY THE ENGINEER.
9. CALIBRATE DRILL SEEDER FOR SPECIFIED (PLS) PER ACRE BEFORE DRILL SEEDING.
10. DRILL SEEDER MUST BE EQUIPPED WITH THE LARGE FRONT CUTTING COULTERS DURING THE INSPECTION OF DRILL SEEDER.

FOR BROADCAST SEEDING

11. USE ONLY COMMERCIAL TYPE CYCLONE TYPE SPREADERS.
12. CALIBRATE CYCLONE SPREADER FOR 1000 Sq. Ft. (PLS) PER ACRE BEFORE SEEDING.
13. TO PREVENT SEED SEPARATION IN SPREADERS, SPREAD ALL SEED TYPES INDEPENDENTLY IN A SEPARATE APPLICATION.
14. IMMEDIATELY AFTER SEEDING, IN ONE OR TWO OPERATIONS, CULTI-PACK THE SEEDED SOILS AND FIRM SEED INTO SURFACE.
15. DISCONTINUE SEEDING IF WIND EXCEEDS 10 MPH.

ITEM 314 EMULSIFIED ASPHALT TREATMENT	
TIME SCHEDULE	FUNCTIONAL USE:
IMMEDIATELY AFTER: SOIL PREPARATION OR WITHIN 24 HOURS AFTER SEEDING, APPLY THE TACK COAT TO DESIGNATED SOIL SURFACES.	SOIL EROSION CONTROL, OR MOISTURE RETENTION BARRIER.
NOTES:	
<ol style="list-style-type: none"> <li>1. ALL TRUCK APPLICATIONS SHALL BE COMPLETED IN ONE PASS OF THE DISTRIBUTOR. ALL TOUCH UP WORK WILL BE FINISHED BY HAND AND HOSE PROCEDURES. APPLY FROM EDGE OF PAVEMENT THROUGH THE FULL SPECIFIED AREAS.</li> <li>2. ENGINEER WILL INSPECT FOR ACCURACY THE OVERALL DEPTH OF THE APPLIED TACK COAT MATERIALS.</li> <li>3. FURTHER VEHICULAR TRAFFIC IS NOT ALLOWED ON LAID BY TACK COAT SURFACES. AT THE CONTRACTORS EXPENSE ALL DAMAGES TO TACK COAT SURFACES WILL BE RE -SHOT AS DIRECTED BY THE ENGINEER.</li> <li>4. USE MATERIALS AS SPECIFIED FOR EROSION CONTROL ON TABLE 18 IN ITEM 300 ASPHALTS, OILS, AND EMULSIONS, AT A RATE OF 0.25 GAL/SY.</li> </ol>	

ITEM 166 FERTILIZER	
TIME SCHEDULE	FUNCTIONAL USE:
AFTER TOPSOIL PLOWING PREPARATIONS ARE COMPLETED, FERTILIZE ROW SOIL SURFACES AND HARROW 2" TO 4" DEEP INTO PLACE.	PLANT NUTRIENTS FOR PLANT AND ROOT DEVELOPMENT.
FERTILIZER SHALL BE EVENLY DISTRIBUTED AT A RATE OF 100 LBS OF NITROGEN PER ACRE. THE BREAK DOWN OF THE NITROGEN ELEMENT SHALL BE IN A 50% SLOW RELEASE FORM. ANALYSIS OF THE (NPK) IS: 3:1:1 OR AS DIRECTED BY THE AREA ENGINEER.	
ITEM 166 NOTES:	
<ol style="list-style-type: none"> <li>1. BROADCAST SPECIFIED FERTILIZER FROM THE EDGE OF PAVEMENT, THROUGH THE ENTIRE ROW SEED BED AREA. APPLICATIONS FOR EDGE OF PAVEMENT, CULVERTS, SIGN POST AREAS, GUARD RAILS AND ISOLATED AREAS SHALL BE APPLIED BY WALK BEHIND SPREADERS AND BY HAND. NO FERTILIZER ALLOWED ON PAVEMENT SURFACES.</li> <li>2. ALL SPREADERS SHALL BE CALIBRATED BY THE CONTRACTOR AND THE ENGINEER FOR ACCURACY AND PERFORMANCE. SHALL USE UNOPENED 50# BAGS OF SPECIFIED FERTILIZER FOR DAILY CALIBRATIONS. APPLICATION SHALL BE A EVEN DISTRIBUTION OF PRODUCT ON DESIGNATED SOIL SURFACES.</li> <li>3. FERTILIZER SHALL BE DELIVERED IN 50# BAGS UNLESS OTHERWISE SPECIFIED OR APPROVED PRIOR TO DELIVERY. BAGS SHALL BE CLEARLY LABELED SHOWING CONTENTS. IF BULK FERTILIZER IS APPROVED, DOCUMENTATION WILL BE REQUIRED FOR EACH LOAD OF MATERIAL DELIVERED VERIFYING AUTHENTICITY OF THE MATERIAL. CULTURAL PROCEDURES ARE UNDER THE DIRECTION OF THE TXDOT AREA ENGINEER.</li> </ol>	



Bryson Lawrence, P.E.

03/26/2024

SCALE = NTS SHEET 2 OF 2

Texas Department of Transportation  
Wichita Falls District Standard

TYPICAL APPLICATION FOR VEGETATION ESTABLISHMENT SHEET

WFS-TA-VES

FILE: BEMPLAYOUTS.dgn	DN: TXDOT	CR: TXDOT	DW: TXDOT	CK: TXDOT
© TXDOT 2009	CONT	SECT	JOB	HIGHWAY
JULY 2019	0156	12	020	SS 447
	DIST	COUNTY	SHEET NO.	
	WFS	WICHITA	117	