

STATE OF TEXAS

DEPARTMENT OF TRANSPORTATION

MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC - 646501001
 CSJ 6465-01-001
 HIGHWAY: US0377
 DELIVERY LOCATION(S): SEE LOCATION MAP


**FOR PURCHASE AND DELIVERY OF MATERIALS ONLY:
 HOT-MIX COLD-LAID ASPHALT CONCRETE
 PAVEMENT (MATERIALS ONLY)**

Submitted for Letting: 2/22/2024
 Date

Approved for Letting: 2/22/2024
 Date

DocuSigned by:


 76C8A3E5D7D24C9...
 Contract Specialist

DocuSigned by:

 2377E0857A804A6...
 Director of Operations

INDEX OF SHEETS

- 1 TITLE SHEET
- 2-4 GENERAL NOTES
- 5 ESTIMATE & QUANTITY SHEET
- 6 STOCKPILE LOCATION MAPS

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.



©2024

| FED.RD. DIV.NO. | PROJECT NO. | SHEET NO. | |
|-----------------|-----------------|-----------|----------|
| 6 | MMC - 646501001 | 1 | |
| STATE | DISTRICT | COUNTY | |
| TEXAS | BWD | MCCULLOCH | |
| CONTROL | SECTION | JOB | HWY NO. |
| 6565 | 01 | 001 | US0377 |
| FILENAME | | | DATE |
| MMC - 646501001 | | | 02/22/24 |

Project Number: MMC-646501001

County: MCCULLOCH

Control: 6465-01-001

Highway: US0377

GENERAL NOTES

This project is for McCulloch County only. Delivery location Site 1 can be anywhere in McCulloch County.

The Engineer will specify the number of WORKING DAYS granted for each WORK ORDER based on appropriate production and delivery rates.

The Engineer will notify the Contractor by email no later than 5:00PM the day before to either cancel a delivery by the Contractor, along with a revised WORK ORDER reflecting this change.

Each Contract awarded by the Department stands on its own and as such, is separate from other Contracts. A Contractor awarded multiple Contracts, must be capable and sufficiently staffed to concurrently process any or all Contracts at the same time.

Contractor questions on this project are to be addressed to the following individual(s):

| Name | Email Address |
|------------------------|--|
| Blake Stembridge, P.E. | blake.stembridge@txdot.gov |

Questions may be submitted via the Letting Pre-Bid Q&A webpage. This webpage can be accessed from the Notice to Contractors dashboard located at the following address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A webpage.

The Letting Pre-Bid Q&A webpage for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

SECTION 10.2 - INSTRUCTIONS TO BIDDERS

This project includes plan sheets that are not part of the bid proposal. View or download plans at: <https://www.txdot.gov/business/letting-bids/plans-online.html>

Project Number: MMC-646501001

County: MCCULLOCH

Control: 6465-01-001

Highway: US0377

SECTION 10.4 – SCOPE OF WORK

This Contract requires the Contractor to provide Materials in accordance with ITEM 8013 HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY) by the following method:

1. Delivered by the Contractor to a designated location as defined in each WORK ORDER issued by TxDOT or the assigned representative.

In accordance with Article 10.4.3.1, this contract may be extended twice not to exceed 540 Calendar Days for the entire contract term if mutually agreed.

SECTION 10.8 – PROSECUTION AND PROGRESS

Section 10.8.2, Contract Term will be 6 months (180 Calendar Days). Calendar Days will be charged in accordance with Article 10.8.2., "Contract Term".

Section 10.8.3., Work Orders issued will specify the following:

1. The type and quantity of material to be delivered and/or picked-up each day,
2. The Contractor's delivery location(s),
3. The number of WORKING DAYS needed in order to complete the WORK ORDER,
4. The type of haul vehicle the Contractor shall use in the delivery.

The Contractor shall have the capability to deliver material using end dumps as haul vehicles.

Contractor deliveries and TxDOT pickups will typically occur between the hours of 7:00AM and 3:30 PM CST. Prior arrangements shall be made with the Engineer if deliveries or pickups are outside these hours.

Contractor's driver shall report to the Engineer or representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time on the haul ticket, which will include the **WORK ORDER** number.

ITEM 8013 HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY)

Delivery costs incurred by the Contractor are subsidiary to this Item.

Use aggregate that meets the SAC requirement of Class B or better.

Asphalt shall be AC-0.6 unless otherwise approved by the Engineer.

Project Number: MMC-646501001

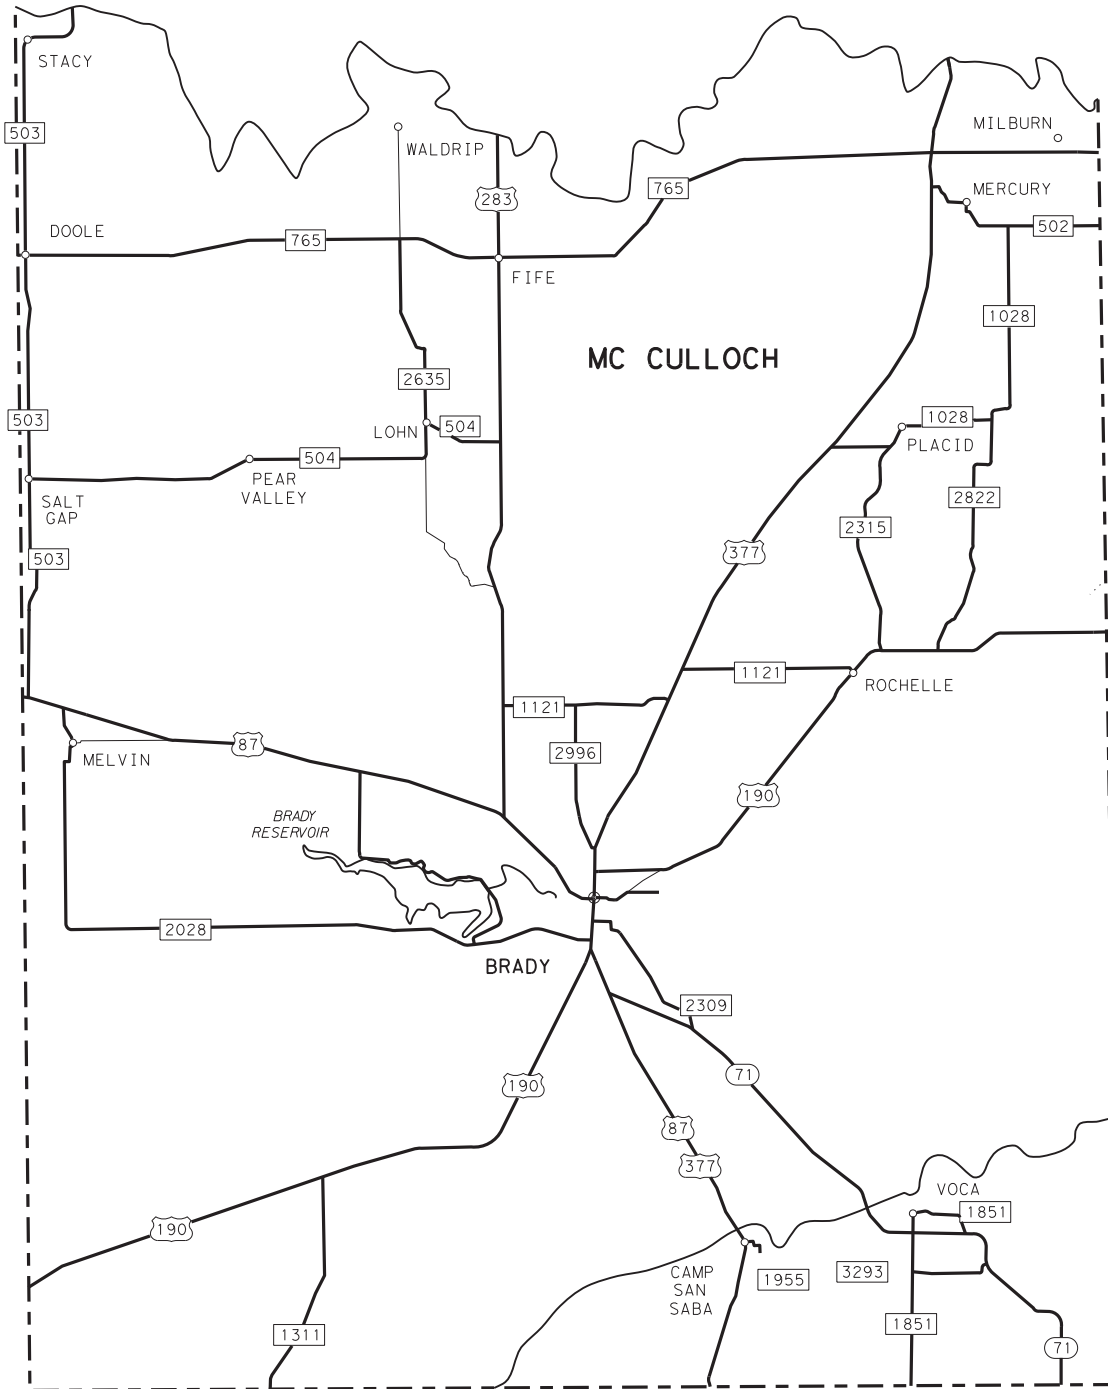
County: MCCULLOCH

Control: 6465-01-001

Highway: US0377

The Plant is the designated aggregate sampling location, unless otherwise approved by the Engineer.

Material deliveries shall be covered by a tarp during transport.



*NOTE:
SITE 1 DELIVERY LOCATION CAN BE ANYWHERE IN McCULLOCH COUNTY.

| SITE | ITEM | DESCRIPTION | UNIT | QTY |
|------|-----------|----------------------------------|------|-------|
| 1 | 8013-6003 | HMCL ACP TY B (DELIVERY)(SITE 1) | TONS | 2,000 |



| | | | |
|-------------------|-------------------------|-----------|-------------|
| FED. RD. DIV. NO. | MAINTENANCE PROJECT NO. | | SHEET NO. |
| 6 | MMC-646501001 | | 6 |
| STATE | DIST. | COUNTY | |
| TEXAS | 23 | MCCULLOCH | |
| CONT. | SECT. | JOB | HIGHWAY NO. |
| 6465 | 01 | 001 | US 377 |