

# STATE OF TEXAS

## DEPARTMENT OF TRANSPORTATION

### MATERIALS MAINTENANCE CONTRACT

PROJECT NO. MMC - 646631001  
 CSJ 6466-31-001  
 HIGHWAY: US0377  
 DELIVERY LOCATION(S): VARIOUS

FOR PURCHASE AND DELIVERY OF MATERIALS ONLY:  
 LIMESTONE ROCK ASPHALT FOR BROWN COUNTY

Submitted for Letting: 3/25/2024  
 Date

Approved for Letting: 3/25/2024  
 Date

DocuSigned by:  
*Tina Crelia*  
 76C8A3E5D7D24C9...  
 Contract Specialist

DocuSigned by:  
*Blake Stenbridge*  
 A2E1607EC542461...  
 Maintenance Engineer

#### INDEX OF SHEETS

- 1 TITLE SHEET
- 2-4 GENERAL NOTES
- 5 ESTIMATE & QUANTITY SHEET
- 6 STOCKPILE LOCATION MAP

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION, NOVEMBER 1, 2014, AND SPECIAL SPECIFICATION ITEMS INCLUDED IN THE CONTRACT SHALL GOVERN ON THIS PROJECT.



©2024

FED.RD. DIV.NO.	PROJECT NO.	SHEET NO.	
6	MMC - 646631001	1	
STATE	DISTRICT	COUNTY	
TEXAS	BWD	BROWN	
CONTROL	SECTION	JOB	HWY NO.
6466	31	001	US0377
FILENAME			DATE
MMC - 646631001			03/25/24

**Project Number:** MMC-644631001

**County:** BROWN

**Control:** 6446-31-001

**Highway:** US0377

**GENERAL NOTES**

***This project is for Brown County only. Delivery location Site 1 can be anywhere in Brown County.***

The Engineer will specify the number of WORKING DAYS granted for each WORK ORDER based on appropriate production and delivery rates.

The Engineer will notify the Contractor by email no later than 5:00PM the day before to either cancel a delivery by the Contractor, along with a revised WORK ORDER reflecting this change.

Each Contract awarded by the Department stands on its own and as such, is separate from other Contracts. A Contractor awarded multiple Contracts, must be capable and sufficiently staffed to concurrently process any or all Contracts at the same time.

Contractor questions on this project are to be addressed to the following individual(s):

Name	Email Address
Blake Stembridge, P.E.	<a href="mailto:blake.stembridge@txdot.gov">blake.stembridge@txdot.gov</a>

Questions may be submitted via the Letting Pre-Bid Q&A webpage. This webpage can be accessed from the Notice to Contractors dashboard located at the following address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A webpage.

The Letting Pre-Bid Q&A webpage for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

**SECTION 10.2 - INSTRUCTIONS TO BIDDERS**

This project includes plan sheets that are not part of the bid proposal. View or download plans at: <https://www.txdot.gov/business/letting-bids/plans-online.html>

**Project Number:** MMC-644631001

**County:** BROWN

**Control:** 6446-31-001

**Highway:** US0377

### **SECTION 10.4 – SCOPE OF WORK**

This Contract requires the Contractor to provide Materials in accordance with ITEM 8040 LIMESTONE ROCK ASPHALT (MATERIALS ONLY) by the following method:

1. Delivered by the Contractor to a designated location as defined in each WORK ORDER issued by TxDOT or the assigned representative.

In accordance with Article 10.4.3.1, this contract may be extended twice not to exceed 540 Calendar Days for the entire contract term if mutually agreed.

### **SECTION 10.8 – PROSECUTION AND PROGRESS**

Section 10.8.2, Contract Term will be 6 months (180 Calendar Days). Calendar Days will be charged in accordance with Article 10.8.2., "Contract Term".

Section 10.8.3., Work Orders issued will specify the following:

1. The type and quantity of material to be delivered and/or picked-up each day,
2. The Contractor's delivery location(s),
3. The number of WORKING DAYS needed in order to complete the WORK ORDER,
4. The type of haul vehicle the Contractor shall use in the delivery.

**The Contractor shall have the capability to deliver material using belly dumps, super dumps/end dumps, or flow boys/live bottoms, as haul vehicles.**

Contractor deliveries will typically occur between the hours of 7:00AM and 3:30 PM CST. Prior arrangements shall be made with the Engineer if deliveries or pickups are outside these hours.

Contractor's driver shall report to the Engineer or representative at the time of arrival at the final delivery location and obtain a signature documenting the date and time on the haul ticket, which will include the **WORK ORDER** number.

### **ITEM 8040 – LIMESTONE ROCK ASPHALT (MATERIALS ONLY)**

**A minimum delivery will be 4 truckloads.**

Transport truck will deliver material with an end dump trailer at locations specified in each **WORK ORDER**.

Delivery of material Monday through Friday during business hours only. Deliveries outside of

**Project Number:** MMC-644631001

**County:** BROWN

**Control:** 6446-31-001

**Highway:** US0377

these times may be allowed at the sole discretion of the Maintenance Section Supervisor.

The Plant is the designated aggregate sampling location, unless otherwise approved by the Engineer.


Material deliveries shall be covered by a tarp during transport.

# ESTIMATE SUMMARY

ITEM-CODE			DESCRIPTION	UNIT	TOTAL	
ITEM NO	DESC CODE	SP NO			EST.	FINAL
8040	6009	000	LRA (TY I GR AA) (DEL) (ST1)	TON	25.000	
8040	6107	000	LRA (TY II GR DS) (DEL) (ST1)	TON	2,275.000	

## ESTIMATE & QUANTITY SHEET

STATE DIST. NO.	COUNTY	PROJECT NO.	SHEET NO.
23	BROWN	MMC - 644631001	5

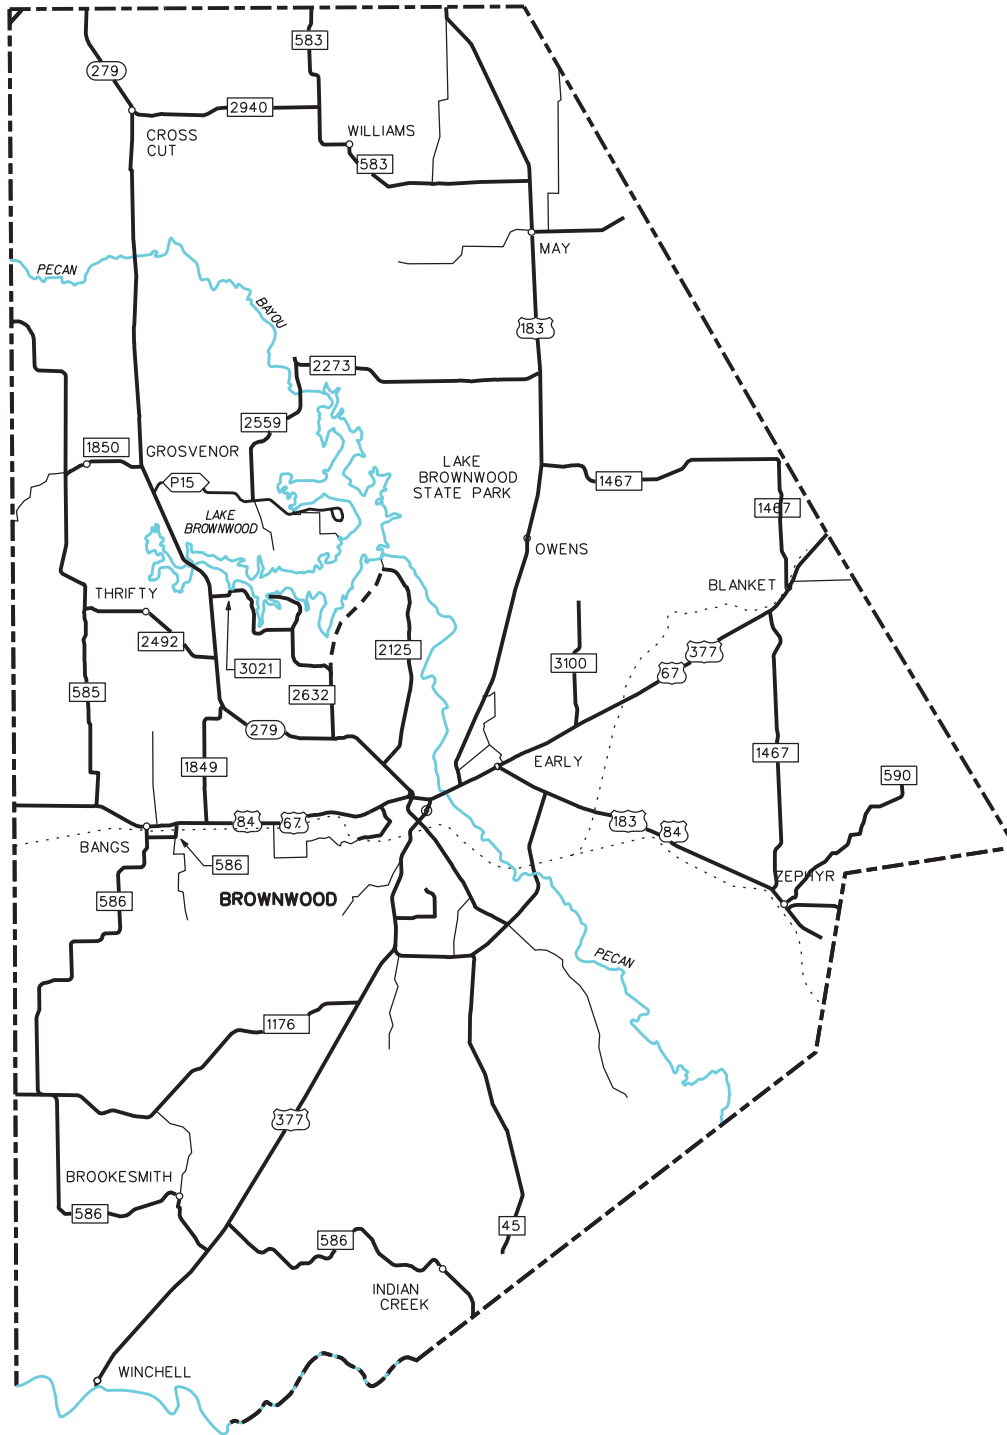

SITE	ITEM	DESCRIPTION	UNIT	QTY
1	8040-6009	LRA (TY I GR AA) (DEL) (ST1)	TON	25
1	8040-6107	LRA (TY II GR DS) (DEL) (ST1)	TON	2,275

\* NOTE:  
SITE 1 DELIVERY LOCATION CAN BE ANYWHERE IN BROWN COUNTY.



FED. RD. DIV. NO.	MAINTENANCE PROJECT NO.		SHEET NO.
6	MMC - 646631001		6
STATE	DIST.	COUNTY	
TEXAS	23	BROWN	
CONT.	SECT.	JOB	HIGHWAY NO.
6466	31	001	US0377