

STATE MAINTENANCE PROJECT NO.			
6467-49-001			
CONT	SECT	JOB	HIGHWAY
6467	49	001	IH 10, ETC.
DIST	COUNTY		SHEET NO.
ELP	EL PASO		1

SEE SHEET 2 FOR
INDEX OF SHEETS


STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION

PLANS OF PROPOSED
HIGHWAY ROUTINE MAINTENANCE CONTRACT

TYPE OF WORK:
HOT-MIX ASPHALT (MATERIALS ONLY)

PROJECT NO.: RMC 6467-49-001
EL PASO DISTRICT MAINTENANCE OFFICE

HIGHWAY: IH 10, ETC.
LIMITS OF WORK: VARIOUS

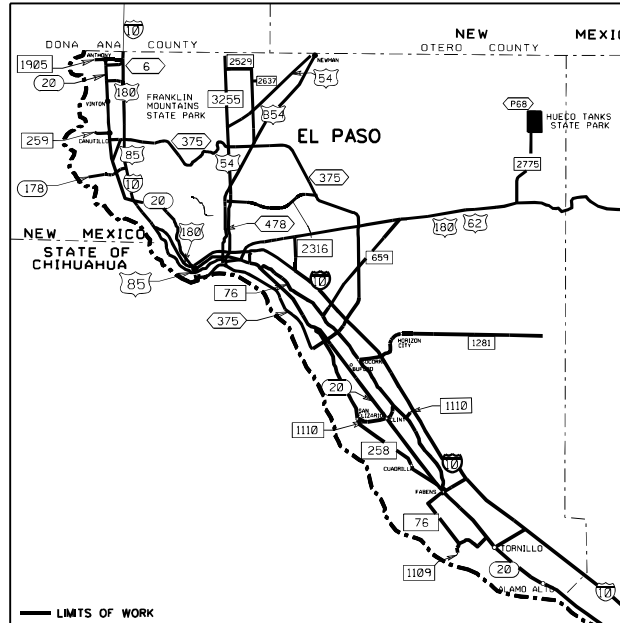

EXCEPTIONS: N/A
EQUATIONS: N/A
RAILROAD CROSSINGS: N/A



RECOMMENDED FOR LETTING: 6/20/2024

Norma Duran
3532116 TEXASDOT
MAINTENANCE ENGINEER/CONTRACT MANAGER

APPROVED FOR LETTING: 6/21/2024

Quinn Medley, P.E.
20809988780488
DIRECTOR OF MAINTENANCE

DATE: 6/20/2024 9:26:33 AM
FILE: I:\ELP\MINT\Contract\2024\240617\Hot-Mix-District-Wide-Materials-Only\1 - DESIGN\Plan Set\TITLE SHEET.dwg

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION,
NOVEMBER 1, 2014 AND SPECIFICATION ITEMS INCLUDED IN THE CONTRACT
SHALL GOVERN ON THIS PROJECT.

INDEX OF SHEETS


<u>SHEET NO.</u>	<u>DESCRIPTION</u>
GENERAL	
1	TITLE SHEET
2	INDEX OF SHEETS
3, 3A	GENERAL NOTES
4	ESTIMATE & QUANTITY

DATE: 6/20/2024 9:26:33 AM

FILE: T:\ELP\PAINT\Contract\District\District\wide\Materials\OnJob\1 - DESIGN\Plan Spc\INDEX_OF_SHEETS.dgn

GENERAL INDEX OF SHEETS

SHEET 1 OF

 Texas Department of Transportation <small>Creating a better quality of transportation for every citizen</small>			
CONT	SECT	JOB	HIGHWAY
5467	49	001	IH 10, ETC.
DIST	COUNTY	SHEET NO.	
ELP	EL PASO	7	

CONTROL: 6467-49-001

COUNTY: EL PASO

HIGHWAY: IH-10, ETC.

GENERAL NOTES:

General Project Description – This material maintenance contract is for furnishing and/or delivery of Dense Graded Hot Mix Asphalt in El Paso County.

The Contract will be managed by the **El Paso District Maintenance Office** with participating Director of Maintenance and District Maintenance Administrator listed below:

Omar Madrid, P.E.
Director of Maintenance
13301 Gateway Blvd. West
El Paso, TX 79928
(915) 790-4331

Antonio Loya
District Maintenance Administrator
13301 Gateway Blvd. West
El Paso, TX 79928
(915) 790-4267

Each Contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process all contracts at the same time.

General Requirements

Obtain Engineer approval for all equipment and vehicles prior to use.

Repair any existing pavement, utilities, structures, etc., damaged by the Contractor's operations, at no additional cost to the Department.

ITEM 10

Section 10.2 INSTRUCTIONS TO BIDDERS

This Contract includes plan sheets that are not part of the bid proposal.

Order plans from any of the plan reproduction companies shown on the web at:
http://www.dot.state.tx.us/business/contractors_consultants/repro_companies.htm

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:
<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

CONTROL: 6467-49-001

SHEET 3

COUNTY: EL PASO

HIGHWAY: IH-10, ETC.

Request a proposal electronically from the Department's website:
<http://www.txdot.gov/business-cq/pr.htm>

Or use the electronic bidding site:
<http://www.txdot.gov/business/letting-bids/ebs.html>

Section 10.3 – AWARD AND EXECUTION

Time charges and work will start on the date stated on the Work Authorization letter. The Contract will be in effect until work on the last callout is completed.

Section 10.7 – LEGAL RELATIONS AND RESPONSIBILITIES

No significant traffic generator events identified.

Do not discharge any liquid pollutant from vehicles onto the roadside. Immediately clean spills and dispose in compliance with local, state, and federal regulations to the satisfaction of the Engineer at no additional cost to the Department.

Occupational Safety & Health Administration (OSHA) regulations prohibit operations that bring people or equipment within 10 ft. of an energized electrical line. Where workers and/or equipment may be close to an energized electrical line, notify the electrical power company and make all necessary adjustments to ensure the safety of workers near the energized line.

Section 10.8 – PROSECUTION AND PROGRESS

This project is to be completed in **180** calendar days in accordance with **Section 10.8.2**, "Calendar Day."

ITEM 8011 – Dense-Graded Hot-Mix Asphalt (Small Quantity) (Materials Only)

The pickup only item is for TxDOT picking up the material at the plant. This item will not include any delivery on the contractor's part.

For small quantity needs, a work order will be issued to the contractor a minimum of 72 hours in advance and the contractor shall be able to provide a minimum of 100 tons per day.

For larger quantity needs (over 500 tons), a work order will be issued to the contractor a minimum of 2 weeks (14 calendar days) in advance of the project start date. Contractor shall be able to provide a minimum of 1000 tons per day for larger quantity needs (over 500 tons).

CONTROL: 6467-49-001

COUNTY: EL PASO

HIGHWAY: IH-10, ETC.

Provide aggregates with a Surface Aggregate Classification (SAC) of "A" for TY-D and TY-C mixes. Provide aggregates with a minimum SAC of "B" for all other mixes unless otherwise shown on the plans.

Hydrated Lime shall be added as an additive as per Item 301 "Asphalt Antistripping Agents" between the rates of 1% minimum and 2.0% maximum by weight. If the Hamburg Wheel Test cannot be met within these limits, Liquid Antistripping agents as approved by the Engineer may be used in conjunction with lime.

Supply Warm-Mix Asphalt (WMA) under this Item.

When Reclaimed Asphalt Pavement (RAP) is used in the production of hot-mix asphaltic concrete, use fractionated RAP. Do not exceed 10.0% of Fractionated RAP on TY-D and TY-C mixtures.

Use of RAS (Recycled Asphalt Shingles) is not allowed for any mixtures.

Substitute PG Binders (grade dumping) will not be allowed for any mixtures.

Obtain the current version of the templates at <https://www.txdot.gov/business/resources/forms-guides/sitemanager-forms.html> Submit electronically to the Engineer.

Design the mixture at 50 gyrations (Ndesign).

The delivery bid items are for the Contractor to furnish and deliver the specified material to any location within the limits of El Paso County as directed by the Engineer.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6467-49-001

DISTRICT El Paso
HIGHWAY IH0010

COUNTY El Paso

CONTROL SECTION JOB				6467-49-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00209742			
COUNTY				El Paso			
HIGHWAY				IH0010			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8011-5003	D-GR HMA(SQ) TY D PG 70-22 (PICKUP)	TON	740.000		740.000	
	8011-5004	D-GR HMA(SQ) TY D PG 70-22 (DELIVERY)	TON	1,370.000		1,370.000	
	8011-5014	D-GR HMA(SQ)TY B PG 64-22 (PICKUP)	TON	740.000		740.000	
	8011-5015	D-GR HMA(SQ)TY B PG 64-22(DELIVERY)	TON	1,370.000		1,370.000	
	8011-5036	D-GR HMA (SQ) TY C PG 70-22 (DELIVERY)	TON	1,370.000		1,370.000	
	8011-5037	D-GR HMA (SQ) TY C PG 70-22 (PICKUP)	TON	740.000		740.000	