

STATE OF TEXAS
DEPARTMENT OF TRANSPORTATION
PLANS OF PROPOSED
STATE HIGHWAY IMPROVEMENT

PROJECT: 6467-51-001
COUNTY: MCLENNAN,ETC
HIGHWAY: US 84,ETC
CALLOUT CONTRACT

FOR THE PURCHASE OF MATERIALS ONLY: HOT MIX

I HEREBY CERTIFY THAT THE CONSTRUCTION WORK
ON THIS PROJECT WAS PERFORMED IN SUBSTANTIAL
COMPLIANCE WITH THE CONTRACT

Note: See project Summary Sheets for
complete listing of limits, lengths,
equations and exceptions

Index of Sheets:

- 2. Estimate and Quantity Sheet
- 3A-3C. General Notes
- 4-5. Summary Sheets

CONTRACTOR NAME:

CONTRACTOR ADDRESS:

DATE WORK BEGAN:

DATE WORK COMPLETED:

DATE WORK ACCEPTED:

RECOMMENDED FOR LETTING:

APPROVED FOR LETTING:

DocuSigned by:

Stephen Michael Kasberg P.E.

5/21/2024

6597DEC5B49C452...

DIRECTOR OF MAINTENANCE

DocuSigned by:

Stanley Swiatek

5/22/2024

B89BD796DD564C9...

DISTRICT ENGINEER (WACO)

SPECIFICATIONS ADOPTED BY THE TEXAS
DEPARTMENT OF TRANSPORTATION, NOVEMBER 1,
2014 AND SPECIAL SPECIFICATION ITEMS
INCLUDED

DISTRICT	COUNTY	HIGHWAY	CONTROL
WACO	MCLENNAN,ETC	US 84,ETC	6467-51-001

©2024 by Texas Dept. of Transportation
All Rights Reserved.

ESTIMATE SUMMARY

ITEM CODE			DESCRIPTION	UNIT	TOTAL	
ITEM NO	DESC CODE	SP NO			EST .	FINAL
8011	6001		D-GR HMA(SQ) TY D PG 64-22 (PICKUP)	TON	4000	
8011	6002		D-GR HMA(SQ) TY D PG 64-22 (DELIVERY)	TON	12000	
8011	6014		D-GR HMA(SQ) TY B PG 64-22 (PICKUP)	TON	1750	
8011	6015		D-GR HMA(SQ) TY B PG 64-22 (DELIVERY)	TON	3750	
8011	6016		D-GR HMA(SQ) TY C PG 64-22 (PICKUP)	TON	2500	
8011	6017		D-GR HMA(SQ) TY C PG 64-22 (DELIVERY)	TON	3500	

ESTIMATE & QUANTITY SHEET

DISTRICT	COUNTY	PROJECT NO.	SHEET NO.
WACO	MCLENNAN,ETC	6467-51-001	2

COUNTY: MCLENNAN, ETC.

HIGHWAY: US84, ETC.

MMC: 6467-51-001

GENERAL

Contract for supply of Hot Mix Asphalt Concrete Pavement materials at non-site-specific locations within the included counties. Maps of the counties included in this contract are shown in the plans.

PRE-BID QUESTIONS

Contractor questions on this project are to be emailed to the Waco District at the following address:

Stephen Kasberg - Wacoprebid@txdot.gov, 254-867-2780, 100 S. Loop Dr., Waco, TX
Carmen Chau - Wacoprebid@txdot.gov, 254-867-2794, 100 S. Loop Dr., Waco, TX

Contractor questions will be accepted through email, phone, and in person by the above individuals. Questions may also be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:

<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

GENERAL NOTES

This is a Non-Site-Specific Contract.

ITEM 10.4: SCOPE OF WORK

Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

In accordance with Article 10.4.3.1, this contract may be extended once not to exceed 365 calendar days for the entire contract term if mutually agreed.

ITEM 10.5: CONTROL OF THE WORK

Prior to beginning operations, the department will arrange a contract kick-off conference between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the contract, proposed procedures and the plans for performing the work while providing for safe passage of traffic at all times.

COUNTY: MCLENNAN, ETC.**HIGHWAY: US84, ETC.****MMC: 6467-51-001**

All work on this contract will be scheduled and directed by the following person(s). Payments will be made on a monthly basis for work completed and accepted according to specifications. All payment requests will be directed to the same:

Maintenance Supervisor	Telephone Number	Maintenance Office Location
Thomas Willis	(254) 772-1200	7479 Bagby Ave. WACO TX 76712
Roger Brooks	(254) 562-2900	3229 Highway 14 N MEXIA, TX 76667-4669

ITEM 10.6: CONTROL OF MATERIALS

This proposed Contract will not include federal funds.

ITEM 10.8: PROSECUTION AND PROGRESS

There are 183 calendar days on this contract. Calendar days will be charged in accordance with Article 10.8.2., "Contract Term".

The Contractor will provide materials that will be (picked up) at the hot mix plant that will be loaded into Department owned trucks or contracted trucks working for the Department, and/or (deliver) material to a designated location as defined in the Work Order as the Contractor's expense.

Contractor is responsible for obtaining annual overweight tolerance permit if hauling material which exceeds the legal road weight.

The Contractor will have at least one hot mix plant within a 50-mile radius of the maintenance offices included in this contract, and the plant within closest proximity of each maintenance office will be the primary source of material provided for (pick up) operations for each maintenance office.

Contractor shall provide an afterhours phone number for ordering of material in the case of an emergency.

Each contract awarded by the Department stands on its own and as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any of all contracts at the same time.

ITEM 10.9: CONTROL OF MATERIALS

Quantities shown in the plans are for bidding purposes only. TxDOT does not guarantee that all quantities shown in plans will be requested for delivery.

COUNTY: MCLENNAN, ETC.

HIGHWAY: US84, ETC.

MMC: 6467-51-001

ITEM 8011: DENSE GRADE HOT-MIX ASPHALT (SQ)(MATERIAL ONLY)

All hot-mix materials shall be in SAC B classification.

RAS is not allowed in surface mixes.

Specify Hot Mix Asphalt Concrete (HMAC) or Warm Mix Asphalt (WMA) at the time of design submittal. After design submittal, continue producing the chosen design unless otherwise approved.


RAP from Contractor owned sources may be used if the RAP is fractioned. The course fraction of Contractor owned RAP will not be allowed if it consist primarily of siliceous aggregates.

Perform all sampling for aggregate quality testing on stockpiles at the HMAC plant. Mixture sampling for QC/QA testing will typically be taken from the truck at the plant; however, the Engineer may direct that a sample be taken at any point or location of mixture during production, delivery and placement.

Delivery tickets must include complete destination address.

Contractor's driver shall report to the State's representative at the time of arrival at the final delivery location and obtain signature documenting the date and time.

For delivery, only Belly Dump or Flow Boy trailers will be allowed. Type of delivery trailer necessary for operations shall be specified on material order.

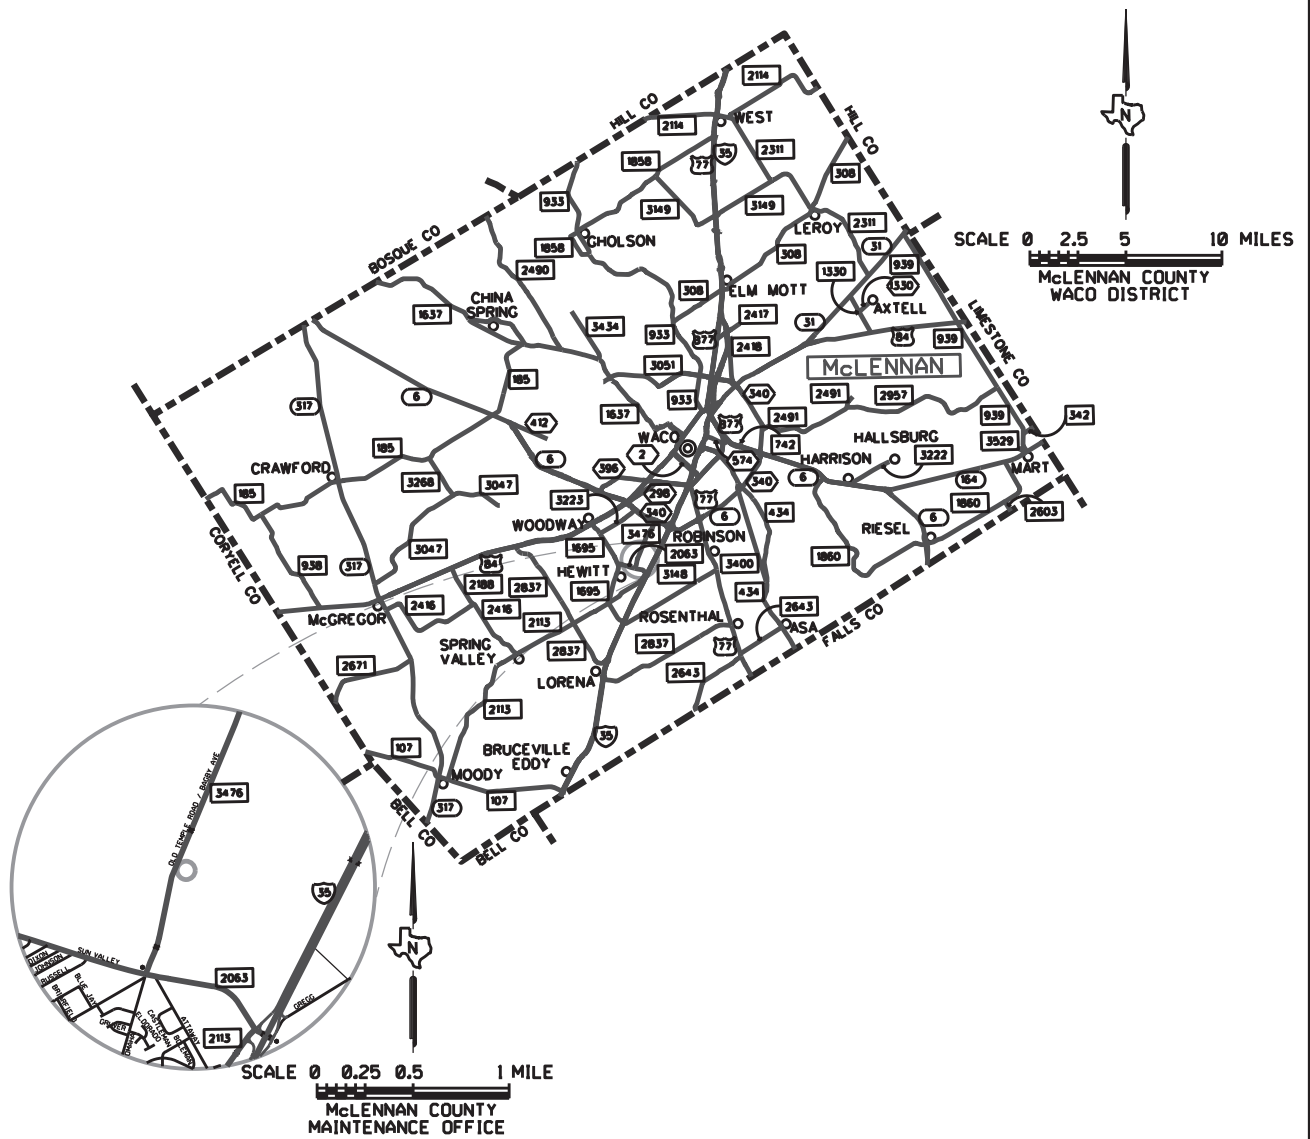

8011	8011	8011	8011	8011	8011
6001	6002	6014	6015	6016	6017
D-GR HMA(SQ) TY D PG 64-22 (PICKUP)	D-GR HMA(SQ) TY D PG 64-22 (DELIVERY)	D-GR HMA(SQ)TY B PG 64-22 (PICKUP)	D-GR HMA(SQ)TY B PG 64-22 (DELIVERY)	D-GR HMA(SQ)TY C PG 64-22 (PICKUP)	D-GR HMA(SQ)TY C PG 64-22 (DELIVERY)
TON	TON	TON	TON	TON	TON
3500	10000	1250	2750	2500	2500
3500	10000	1250	2750	2500	2500


Texas Department of Transportation

QUANTITY SUMMARY & McLENNAN COUNTY MAP

SHEET 1 OF 2


© TxDOT 2024	CONT	SECT	JOB	HIGHWAY
	6467	51	001	US 84,ETC
	DIST	COUNTY		SHEET NO.
	WAC	McLENNAN,ETC		4

4/19/2024 T:\WACMAINT\MMC.Cont-acts\Hotmix\FY2024\CAD Files\Hotmix Cont-act Template.dgn

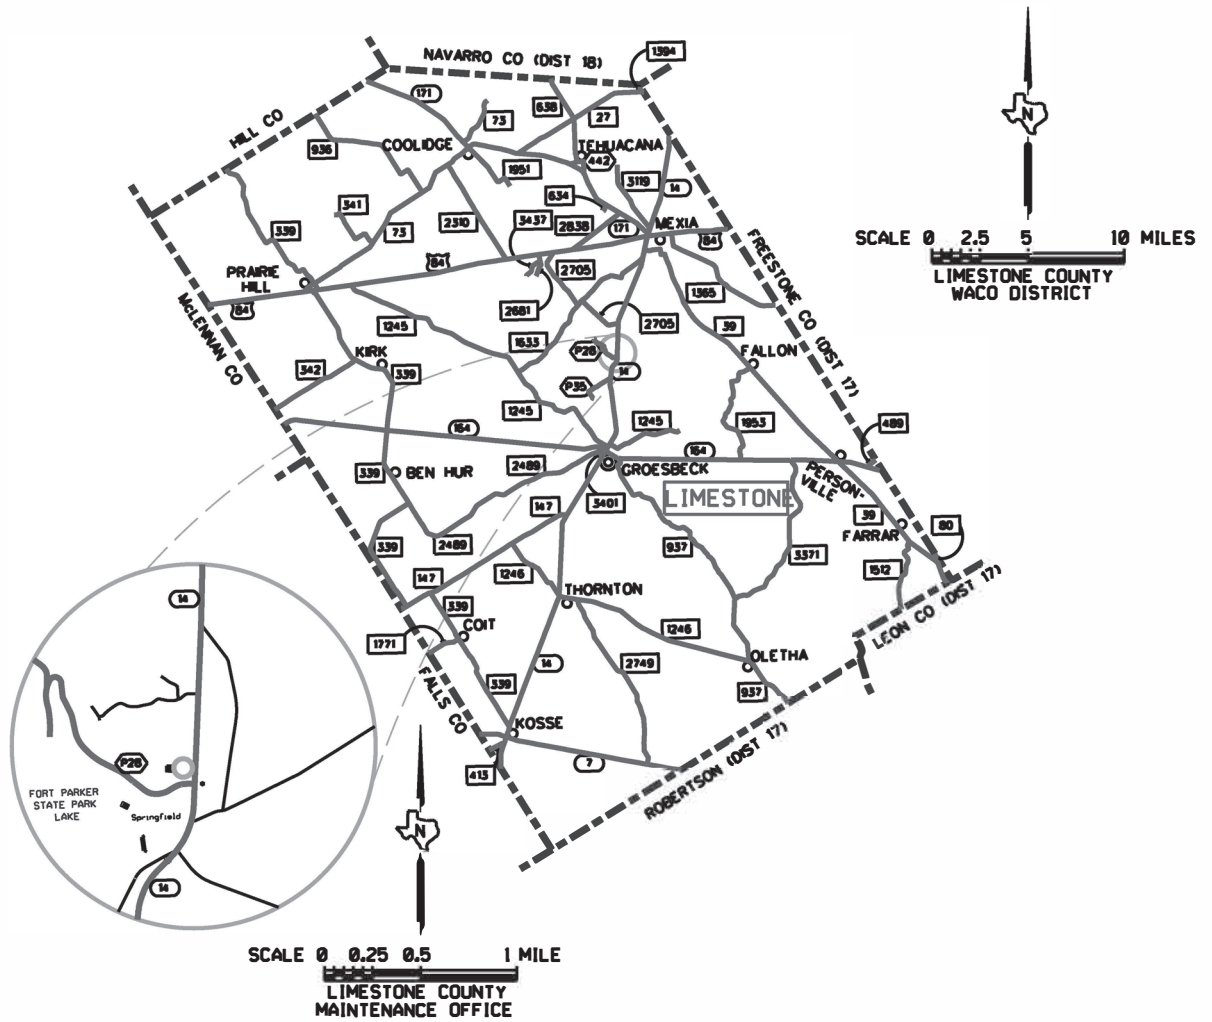

8011	8011	8011	8011	8011	8011
6001	6002	6014	6015	6016	6017
D-GR HMA(SQ) TY D PG 64-22 (PICKUP)	D-GR HMA(SQ) TY D PG 64-22 (DELIVERY)	D-GR HMA(SQ)TY B PG 64-22 (PICKUP)	D-GR HMA(SQ)TY B PG 64-22 (DELIVERY)	D-GR HMA(SQ)TY C PG 64-22 (PICKUP)	D-GR HMA(SQ)TY C PG 64-22 (DELIVERY)
TON	TON	TON	TON	TON	TON
500	2000	500	1000	0	1000
500	2000	500	1000	0	1000

4/19/2024 T:\WACMAINT\MMC_Contr-acts\Hotmix\FY2024\CAD_Files\Hotmix_Contr-act_Template.dgn



**QUANTITY SUMMARY
&
LIMESTONE
COUNTY MAP**

SHEET 2 OF 2

© TxDOT 2024		CONT	SECT	JOB	HIGHWAY
		6467	51	001	US 84,ETC
		DIST		COUNTY	SHEET NO.
		WAC		MCLENNAN,ETC	5