

CONT	SECT	JOB	HIGHWAY
6468	01	001	US 281, ETC.
DIST	COUNTY		SHEET NO.
AUS	BLANCO, ETC.		1

STATE OF TEXAS

DEPARTMENT OF TRANSPORTATION


PLANS OF PROPOSED MATERIALS MAINTENANCE CONTRACT MATERIALS ONLY

PROJECT NUMBER
MMC 646801001

BLANCO, ETC
US 281, ETC

LIMITS: VARIOUS COUNTIES INCLUDING
BLANCO, BURNET, GILLESPIE, LLANO, AND MASON

FOR THE DELIVERY OF MATERIAL
CONSISTING OF HOT-MIX COLD-LAID ASPHALT CONCRETE PAVEMENT

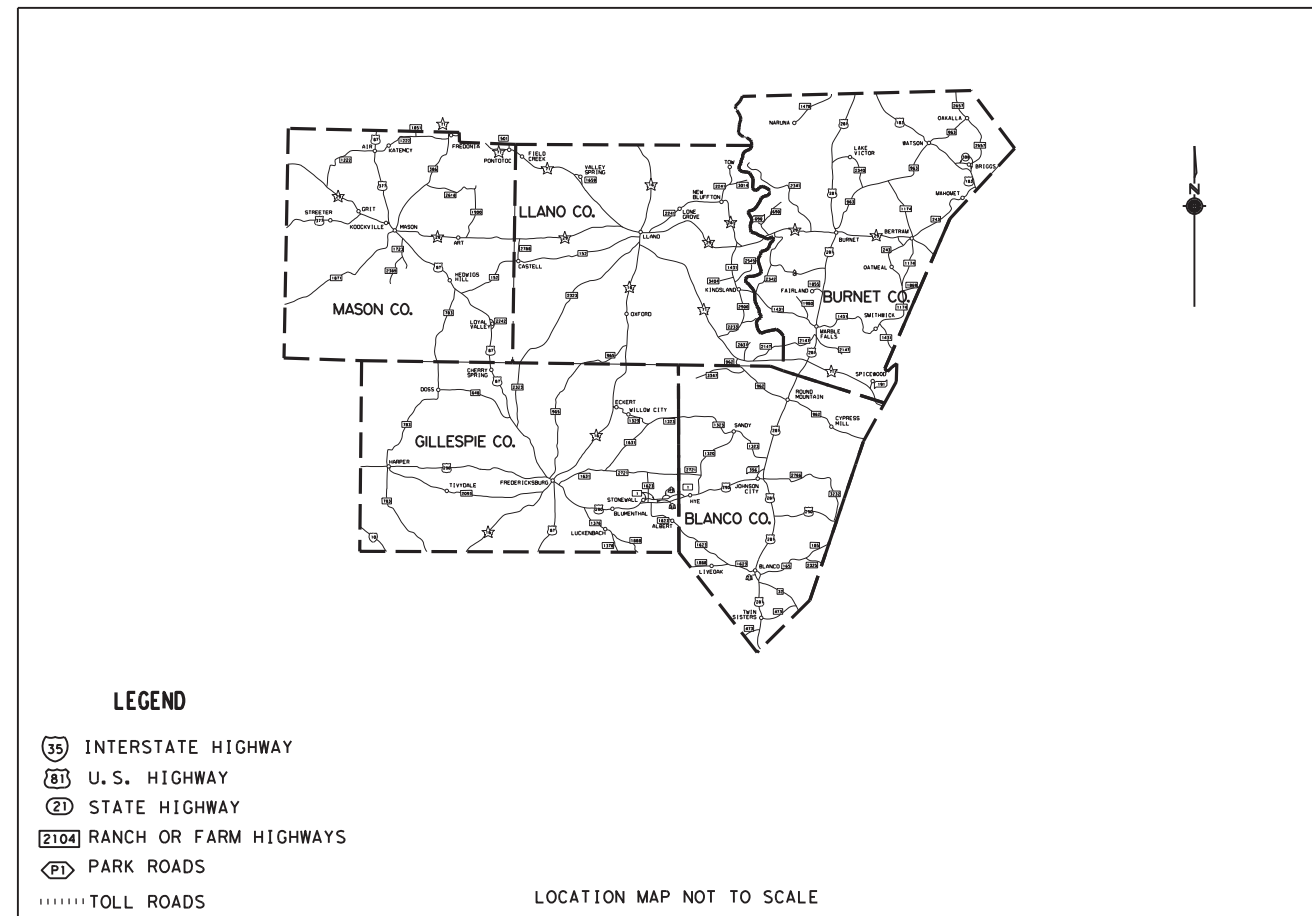

EXCEPTIONS: NONE
EQUATIONS: NONE
RAILROAD CROSSINGS: NONE

SUBMITTED FOR LETTING: 7/3/2024

DocuSigned by:
Gisel Carrasco, P.E.
097829A06497450...
DISTRICT MAINTENANCE ENGINEER

APPROVED FOR LETTING: 7/3/2024

DocuSigned by:
Omar X. De Leon, P.E.
D18DBE2B94AF4FA...
DIRECTOR OF MAINTENANCE

FILE: \$FILE\$ DATE: \$DATE\$ TIME: \$TIME\$

SPECIFICATIONS ADOPTED BY THE TEXAS DEPARTMENT OF TRANSPORTATION ON SEPTEMBER 1, 2024 AND SPECIFICATION ITEMS LISTED AND DATED AS FOLLOWS, SHALL GOVERN ON THIS PROJECT.



GENERAL

- 1 TITLE SHEET
- 2 INDEX OF SHEETS
- 3 GENERAL NOTES
- 4 QUANTITY SHEET
- 5 LOCATION SUMMARY

**Austin District
Maintenance Office**



INDEX OF SHEETS

© 2019		CONT	SECT	JOB	HIGHWAY
DS:	CK:	6468	01	001	US 281, ETC
		DIST	COUNTY		SHEET NO.
DW:	CK:	AUS	BLANCO, ETC		2

Project Number: MMC 646801001
County: Blanco, etc.
Highway: US 281, etc.

Sheet: 3
Control: 6468-01-001

Project Number: MMC 646801001
County: Blanco, etc.
Highway: US 281, etc.

Sheet: 3
Control: 6468-01-001

GENERAL NOTES:

GENERAL

Work under this contract consists of **Hot Mix Cold-Laid Asphalt Concrete Pavement Material Delivery** at various locations in **Blanco, Burnet, Gillespie, Llano, and Mason Counties**.

Each contract awarded by the Department stands on its own as such, is separate from other contracts. A Contractor awarded multiple contracts, must be capable and sufficiently staffed to concurrently process any or all contracts at the same time.

Coordinate work through Maintenance Supervisor:

Blanco	Malcom Oldaker	830-868-7166	MOLDAKE@txdot.gov
Burnet	Christopher Hall	512-756-2316	Christopher.Hall@txdot.gov
Gillespie	Brad Phipps	512-288-4761	Brad.Phipps@txdot.gov
Llano	James Low	325-247-5146	James.Low@txdot.gov
Mason	Joey Gunnels	325-347-6447	Joey.Gunnels@txdot.gov

Pre-Bid Contact List
District Maintenance

Gisel.Carrasco@txdot.gov

Questions may be submitted via the Letting Pre-Bid Q&A web page. This webpage can be accessed from the Notice to Contractors dashboard located at the following Address:
<https://tableau.txdot.gov/views/ProjectInformationDashboard/NoticetoContractors>

All contractor questions will be reviewed by the Engineer. All questions and any corresponding responses that are generated will be posted through the same Letting Pre-Bid Q&A web page.

The Letting Pre-Bid Q&A web page for each project can be accessed by using the dashboard to navigate to the project you are interested in by scrolling or filtering the dashboard using the controls on the left. Hover over the blue hyperlink for the project you want to view the Q&A for and click on the link in the window that pops up.

SECTION 10.2 - INSTRUCTIONS TO BIDDERS

This project includes plan sheets that are not part of the bid proposal. View or download plans at:

<https://www.dot.state.tx.us/business/plansonline/ftpinfo.htm>

SECTION 10.4 – SCOPE OF WORK

Prior to beginning operations, the Department will arrange a coordination call between representatives of the Department and the Contractor. In this meeting, the representatives from all parties will discuss the Contract, proposed procedures, and plans for performing the work while providing safe passage for traffic at all times. Specifications, unusual conditions, and other

pertinent items regarding the work will also be discussed. Limit the use of the roadway for the hauling of material to legal loads. Keep the traveled surfaces used in hauling operations free of dirt or other materials.

SECTION 10.8 - PROSECUTION AND PROGRESS

There are 365 calendar days on this contract. Calendar days will be charged in accordance with Article 10.8.2., "Contract Term".

ITEM 520 – WEIGHING AND MEASURING EQUIPMENT

A daily summary spreadsheet will be required for all material delivered.

SS 8013 – HOT-MIX COLD LAID ASPHALT CONCRETE PAVEMENT (MATERIALS ONLY)

Use SAC B or better AC-0.6 for this Item.

Transport truck will deliver material with an end dump trailer/belly dump as specified in the work orders.



Estimate & Quantity Sheet

CONTROLLING PROJECT ID 6468-01-001

DISTRICT Austin
HIGHWAY US0281

COUNTY Blanco

CONTROL SECTION JOB				6468-01-001		TOTAL EST.	TOTAL FINAL
PROJECT ID				A00210031			
COUNTY				Blanco			
HIGHWAY				US0281			
ALT	BID CODE	DESCRIPTION	UNIT	EST.	FINAL		
	8013-7002	HMCL ACP TYPE B (DEL)(SITE 1)	TON	1,000.000		1,000.000	
	8013-7003	HMCL ACP TYPE B (DEL)(SITE 2)	TON	1,000.000		1,000.000	
	8013-7004	HMCL ACP TYPE B (DEL)(SITE 3)	TON	1,000.000		1,000.000	
	8013-7005	HMCL ACP TYPE B (DEL)(SITE 4)	TON	1,000.000		1,000.000	
	8013-7006	HMCL ACP TYPE B (DEL)(SITE 5)	TON	1,000.000		1,000.000	
	8013-7017	HMCL ACP TYPE D (DEL)(SITE 1)	TON	4,800.000		4,800.000	
	8013-7018	HMCL ACP TYPE D (DEL)(SITE 2)	TON	6,000.000		6,000.000	
	8013-7019	HMCL ACP TYPE D (DEL)(SITE 3)	TON	6,000.000		6,000.000	
	8013-7020	HMCL ACP TYPE D (DEL)(SITE 4)	TON	3,600.000		3,600.000	
	8013-7021	HMCL ACP TYPE D (DEL)(SITE 5)	TON	6,000.000		6,000.000	

